

# RF TEST REPORT



Report No.: RF\_FCC\_SL18010503-RUC-002\_W5258 Rev:1.0  
 Supersede Report No.:

Applicant	:	Ruckus Wireless, Inc.
Product Name	:	R730 Access Point
Model No.	:	R730
Test Standard	:	47 CFR 15.407
Test Method	:	ANSI C63.4: 2014 789033 D02 General UNII Test Procedures New Rules v01r02
FCC ID	:	S9GHR730
IC ID	:	5912A-R730
Dates of test	:	04/27/2018 to 07/20/2018
Issue Date	:	08/07/2018
Test Result	:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Equipment complied with the specification <input checked="" type="checkbox"/>		
Equipment did not comply with the specification <input type="checkbox"/>		

This Test Report is Issued Under the Authority of:	
Deon Dai	Chen Ge
Test Engineer	Engineer Reviewer
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only	

Issued By:  
 SIEMIC Laboratories  
 775 Montague Expressway, Milpitas, 95035 CA



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: [www.siemic.com](http://www.siemic.com); Follow us at:

## Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC, RF/Wireless, Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless, Telecom
Taiwan	BSMI, NCC, NIST	EMC, RF, Telecom, Safety
Hong Kong	OFTA, NIST	RF/Wireless, Telecom
Australia	NATA, NIST	EMC, RF, Telecom, Safety
Korea	KCC/RRA, NIST	EMI, EMS, RF, Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety, EMC, RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom, Safety
Israel	MOC, NIST	EMC, RF, Telecom, Safety

### Accreditations for Product Certifications

Country	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC, RF, Telecom
Canada	IC FCB, NIST	EMC, RF, Telecom
Singapore	iDA, NIST	EMC, RF, Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC (RCB 208)	RF, Telecom
Hong Kong	OFTA (US002)	RF, Telecom

775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: [www.siemic.com](http://www.siemic.com); Follow us at:



## CONTENTS

1	REPORT REVISION HISTORY .....	<b>4</b>
2	EXECUTIVE SUMMARY .....	<b>5</b>
3	CUSTOMER INFORMATION .....	<b>5</b>
4	TEST SITE INFORMATION .....	<b>5</b>
5	MODIFICATION .....	<b>5</b>
6	EUT INFORMATION .....	<b>6</b>
6.1	EUT Description .....	6
6.2	Radio Description .....	6
7	SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION.....	<b>8</b>
7.1	Supporting Equipment .....	8
7.2	Cabling Description .....	8
7.3	Test Software Description .....	8
8	TEST SUMMARY .....	<b>9</b>
9	MEASUREMENT UNCERTAINTY .....	<b>10</b>
9.1	Radiated Emissions (30MHz to 1GHz).....	10
9.2	Radiated Emissions (1GHz to 40GHz).....	10
9.3	RF conducted measurement.....	11
10	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS.....	<b>12</b>
10.1	Conducted Emissions.....	12
10.2	26 dB Bandwidth & 6 dB Bandwidth.....	15
10.3	Output Power .....	27
10.4	Peak Spectral Density .....	150
10.5	Band Edge and Emission Mask Measurement .....	273
10.6	Radiated Emissions below 1GHz.....	370
10.7	Radiated Spurious Emissions above 1GHz.....	372
	ANNEX A. TEST INSTRUMENT .....	<b>390</b>
	ANNEX B. SIEMIC ACCREDITATION .....	<b>391</b>

## 1 Report Revision History

Report No.	Report Version	Description	Issue Date
RF_FCC_SL18010503-RUC-002_W5258	None	Original	08/07/2018
RF_FCC_SL18010503-RUC-002_W5258 Rev:1.0	Rev: 1.0	Update Band edge remark discription	08/16/2018

## 2 Executive Summary

The purpose of this test program was to demonstrate compliance of following product

Company: Ruckus Wireless, Inc.  
Product: R730 Access Point  
Model: R730

against the current Stipulated Standards. The specified model product stated above has demonstrated compliance with the Stipulated Standard listed on 1<sup>st</sup> page.

## 3 Customer information

Applicant Name	:	Ruckus Wireless, Inc.
Applicant Address	:	350 West Java Drive, Sunnyvale, California 94089 U.S.A
Manufacturer Name	:	Ruckus Wireless, Inc.
Manufacturer Address	:	350 West Java Drive, Sunnyvale, California 94089 U.S.A

## 4 Test site information

Lab performing tests	SIEMIC Laboratories
Lab Address	775 Montague Expressway, Milpitas, CA 95035
FCC Test Site No.	881796
IC Test Site No.	4842D-2
VCCI Test Site No.	A0133

## 5 Modification

Index	Item	Description	Note
-	-	-	-

## 6 EUT Information

### 6.1 EUT Description

Product Name	R730 Access Point
Model No.	R730
Trade Name	Ruckus
Serial No.	111806000002
Host Model No.	N/A
Input Power	48VDC (PoE)
Power Adapter Manu/Model	N/A
Power Adapter SN	N/A
Date of EUT received	04/20/2018
Equipment Class/ Category	DTS, UNII
Port/Connectors	PoE, Ethernet

### 6.2 Radio Description

Radio Type	802.11a/n20/ac20/ax20	802.11n40/ac40/ax40	802.11ac80/ax80
Operating Frequency	5180-5240MHz 5745-5825MHz	5190-5230MHz 5755-5795MHz	5210MHz 5775MHz
Modulation	OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
Channel Spacing	20MHz	40MHz	80MHz
Number of Channels	9	4	2
Antenna Type	Internal Omni PCB Antenna		
Antenna Gain (Peak)	5GHz: 1.5dBi		
Antenna Connector Type	U.FL		
Note	2.4GHz and 5GHz Radio transmit simultaneously		

EUT Power level setting for 8x8 mode (The setting is the same for Beamforming and Non-Beamforming):

Mode	Frequency	ART Power Setting
802.11-a	5180	19
802.11-a	5200	19
802.11-a	5240	19
802.11-ax-20	5180	19
802.11-ax-20	5200	19
802.11-ax-20	5240	19
802.11-ax-40	5190	19
802.11-ax-40	5230	19
802.11-ax-80	5210	19
802.11-a	5745	17
802.11-a	5785	17
802.11-a	5825	17
802.11-ax-20	5745	17
802.11-ax-20	5785	17
802.11-ax-20	5825	17
802.11-ax-40	5755	17
802.11-ax-40	5795	17
802.11-ax-80	5775	17

EUT Power level setting for 4x4 mode(The setting is the same for Beamforming and Non-Beamforming):

Mode	Frequency	ART Power Setting
802.11-a	5180	19
802.11-a	5200	20
802.11-a	5240	20
802.11-ax-20	5180	18
802.11-ax-20	5200	20
802.11-ax-20	5240	20
802.11-ax-40	5190	15
802.11-ax-40	5230	20
802.11-ax-80	5210	15
802.11-a	5745	20
802.11-a	5785	20
802.11-a	5825	20
802.11-ax-20	5745	20
802.11-ax-20	5785	20
802.11-ax-20	5825	20
802.11-ax-40	5755	20
802.11-ax-40	5795	20
802.11-ax-80	5775	20

## 7 Supporting Equipment/Software and cabling Description

### 7.1 Supporting Equipment

Item	Supporting Equipment Description	Model	Serial Number	Manufacturer	Note
1	Laptop	PP01L Latitude E5440	F1WPF12	Dell	-
2	POE Adapter	740-64211-001	133279963	Ruckus	-

### 7.2 Cabling Description

Name	Connection Start		Connection Stop		Length / shielding Info		Note
	From	I/O Port	To	I/O Port	Length (m)	Shielding	
RJ45	EUT	RJ45	POE	RJ45	2	Unshielded	-
RJ45	POE	RJ45	Laptop	RJ45	3	Unshielded	-

### 7.3 Test Software Description

Test Item	Software	Description
RF Testing	QCRT	Set the EUT to transmit continuously in diferent test modes and channels



## 8 Test Summary

Test Item	Test standard		Test Method/Procedure	Pass / Fail
Restricted Band of Operation	FCC	15.205	ANSI C63.4 – 2014 789033 D02 General UNII Test Procedures New Rules v01r02	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
AC Conducted Emissions Voltage	FCC	15.207(a)	ANSI C63.4 – 2014	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A

Test Item	Test standard		Test Method/Procedure	Pass / Fail
26 & 6 dB Emission Bandwidth	FCC	15.407 (a) (2)	789033 D02 General UNII Test Procedures New Rules v01r02	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
Maximum conducted Output Power	FCC	15.407 (a) (2)	789033 D02 General UNII Test Procedures New Rules v01r02	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
Power reduction (Antenna Gain > 6 dBi)	FCC	15.407 (a) (2)	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
Band Edge and Radiated Spurious Emissions	FCC	15.407(b)(2), 15.407(b)(6)	ANSI C63.4 – 2014 789033 D02 General UNII Test Procedures New Rules v01r02	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
Power Spectral Density	FCC	15.407 (a) (2)	789033 D02 General UNII Test Procedures New Rules v01r02	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
Frequency Stability	FCC	15.407 (g)	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
Transmit Power Control (TPC)	FCC	15.407 (h)(1)	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
User Manual	FCC	-	-	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
Remark	<ol style="list-style-type: none"> <li>All measurement uncertainties are not taken into consideration for all presented test result.</li> <li>The applicant shall ensure frequency stability by showing that an emission is maintained within the band of operation under all normal operating conditions as specified in the user's manual.</li> </ol>			

## 9 Measurement Uncertainty

### 9.1 Radiated Emissions (30MHz to 1GHz)

The test is to measure the radiated emissions of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the antenna
- Uncertainty of cables
- Uncertainty due to the mismatches
- NSA Calibration
- Etc., details see the below table

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Receiver Reading	0.12	Rectangular	1.732	1	0.069284
Cable Insertion Loss	0.21	Normal	2	1	0.105
Filter Insertion Loss	0.25	Normal	2	1	0.125
Antenna Factor	0.65	Normal	2	1	0.325
Receiver CW accuracy	0.5	Rectangular	1.732	1	0.2886836
Pulse Amplitude Response	1.5	Rectangular	1.732	1	0.86605081
PRF Response	1.5	Rectangular	1.732	1	0.86605081
Mismatch Filter - Receiver	0.25	U-Shape	1.414	1	0.1768033
NSA Calibration	4.0	U-Shape	1.414	1	2.8288543
Combined Standard Uncertainty					3.0059131
Expanded Uncertainty (K=2)					6.0118262

The total derived measurement uncertainty is +/- 6.00 dB.

### 9.2 Radiated Emissions (1GHz to 40GHz)

The test is to measure the radiated emissions of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the antenna
- Uncertainty of cables
- Uncertainty due to the mismatches
- VSWR Calibration
- Etc., details see the below table

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Receiver Reading	0.12	Rectangular	1.732	1	0.0692840
Cable Insertion Loss	0.21	Normal	2	1	0.1050000
Filter Insertion Loss	0.25	Normal	2	1	0.1250000
Antenna Factor	0.65	Normal	2	1	0.3250000
Receiver CW accuracy	0.5	Rectangular	1.732	1	0.2886836
Pulse Amplitude Response	1.5	Rectangular	1.732	1	0.8660508
PRF Response	1.5	Rectangular	1.732	1	0.8660508
Mismatch Filter - Receiver	0.25	U-Shape	1.414	1	0.1768033
VSWR Calibration	2.0	U-Shape	1.414	1	1.4144272
Combined Standard Uncertainty					4.2363
Expanded Uncertainty (K=2)					8.4726

The total derived measurement uncertainty is +/- 8.47 dB.

### 9.3 RF conducted measurement

The test is to measure the RF output power from the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the Reference Level Uncertainty
- Uncertainty of variable attenuators
- Uncertainty of cables
- Uncertainty due to the mismatches

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Reference Level	0.12	Rectangular	1.732	1	0.069284
Cable Insertion Loss	0.21	Normal	2	1	0.105
Attenuator	0.25	Normal	2	1	0.125
Mismatch	0.25	U-Shape	1.414	1	0.1768033
Combined Standard Uncertainty					0.476087
Expanded Uncertainty (K=2)					0.952174


The total derived measurement uncertainty is +/- 0.95 dB.

## 10 Measurements, Examination and Derived Results

### 10.1 Conducted Emissions

#### Conducted Emission Limit

Frequency ranges (MHz)	Limit (dBuV)	
	QP	Average
0.15 ~ 0.5	66 – 56	56 – 46
0.5 ~ 5	56	46
5 ~ 30	60	50

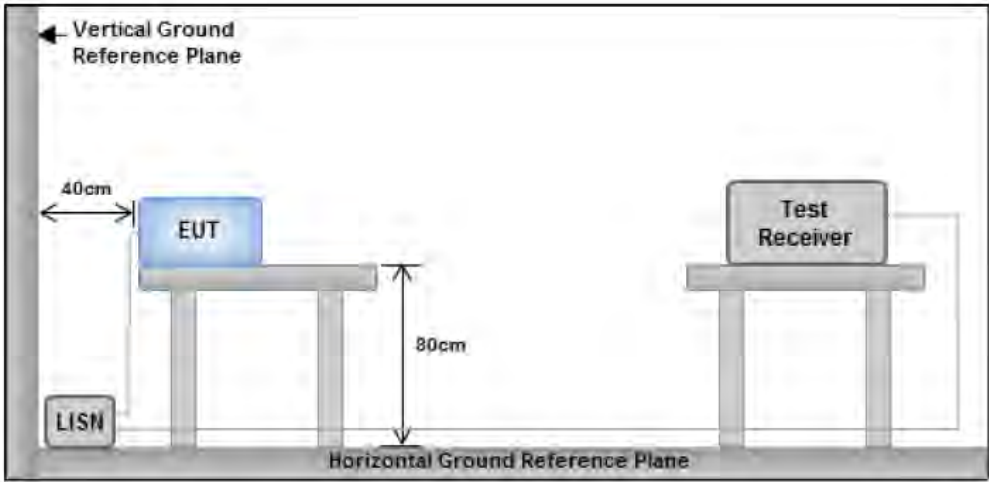Spec	Item	Requirement	Applicable
FCC 15.207	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequency ranges.	<input checked="" type="checkbox"/>
Test Setup		 <p><b>Note: 1. Support units were connected to second LISN.</b>  <b>2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes</b></p>	
Procedure		<ul style="list-style-type: none"> <li>- The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B.</li> <li>- The power supply for the EUT was fed through a 50<math>\Omega</math>/50<math>\mu</math>H EUT LISN, connected to filtered mains.</li> <li>- The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.</li> <li>- All other supporting equipment was powered separately from another main supply.</li> </ul>	
Remark		EUT was tested at 120VAC, 60Hz	
Result		<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	


Test Data     Yes                       N/A

Test Plot     Yes (See below)       N/A

Test was done by Deon Dai at Conducted Emission test site.

## Conducted Emission Test Results

Test specification:	Conducted Emissions			Result:	<input checked="" type="checkbox"/> Pass  <input type="checkbox"/> Fail
Environmental Conditions:	Temp(°C):	21			
	Humidity (%):	42			
	Atmospheric(mbar):	1021			
Mains Power:	120Vac, 60Hz				
Tested by:	Deon Dai				
Test Date:	06/22/2018				
Remarks	POE, Live				

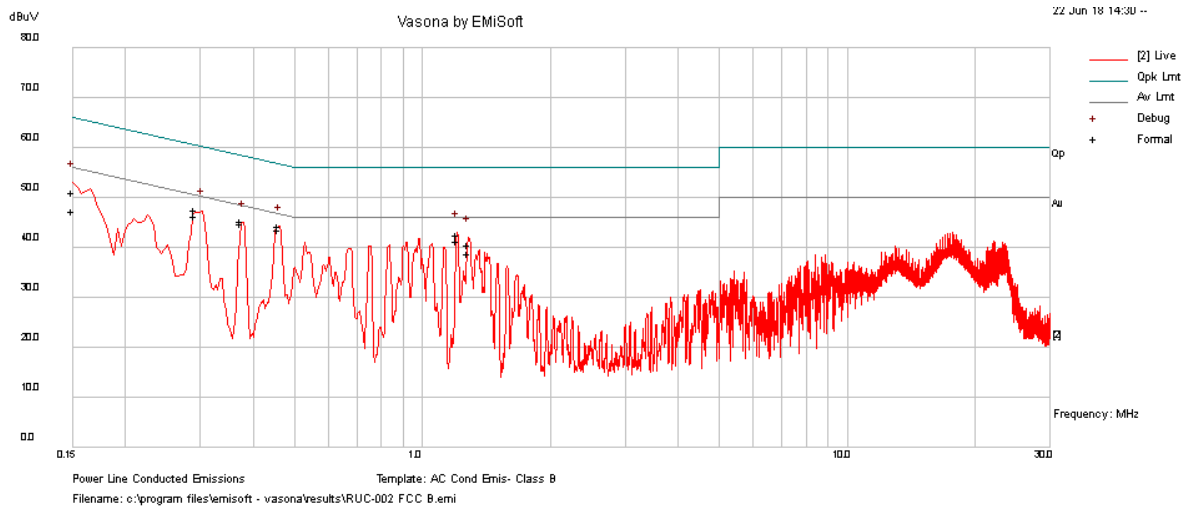


Live Plot at 120Vac, 60Hz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	Factors (dB)	Level (dBuV)	Measurement Type	Line / Neutral	Limit (dBuV)	Margin (dB)	Pass /Fail
0.46	34.99	9.33	0.04	44.36	Quasi Peak	Live	56.75	-12.39	Pass
0.29	38.19	9.32	0.04	47.56	Quasi Peak	Live	60.49	-12.93	Pass
0.15	41.7	9.33	0.05	51.08	Quasi Peak	Live	65.98	-14.9	Pass
1.20	33.32	9.33	0.05	42.7	Quasi Peak	Live	56	-13.3	Pass
0.37	35.91	9.33	0.04	45.28	Quasi Peak	Live	58.4	-13.12	Pass
1.28	31.09	9.34	0.05	40.47	Quasi Peak	Live	56	-15.53	Pass
0.46	34.29	9.33	0.04	43.66	Average	Live	46.75	-3.09	Pass
0.29	36.88	9.32	0.04	46.24	Average	Live	50.49	-4.25	Pass
0.15	38.03	9.33	0.05	47.41	Average	Live	55.98	-8.57	Pass
1.20	31.87	9.33	0.05	41.25	Average	Live	46	-4.75	Pass
0.37	35.57	9.33	0.04	44.93	Average	Live	48.4	-3.47	Pass
1.28	29.57	9.34	0.05	38.95	Average	Live	46	-7.05	Pass

### Conducted Emission Test Results

Test specification:	Conducted Emissions			Result:	<input checked="" type="checkbox"/> Pass  <input type="checkbox"/> Fail
Environmental Conditions:	Temp(°C):	21			
	Humidity (%):	42			
	Atmospheric(mbar):	1021			
Mains Power:	120Vac, 60Hz				
Tested by:	Deon Dai				
Test Date:	06/22/2018				
Remarks	POE, Neutral				

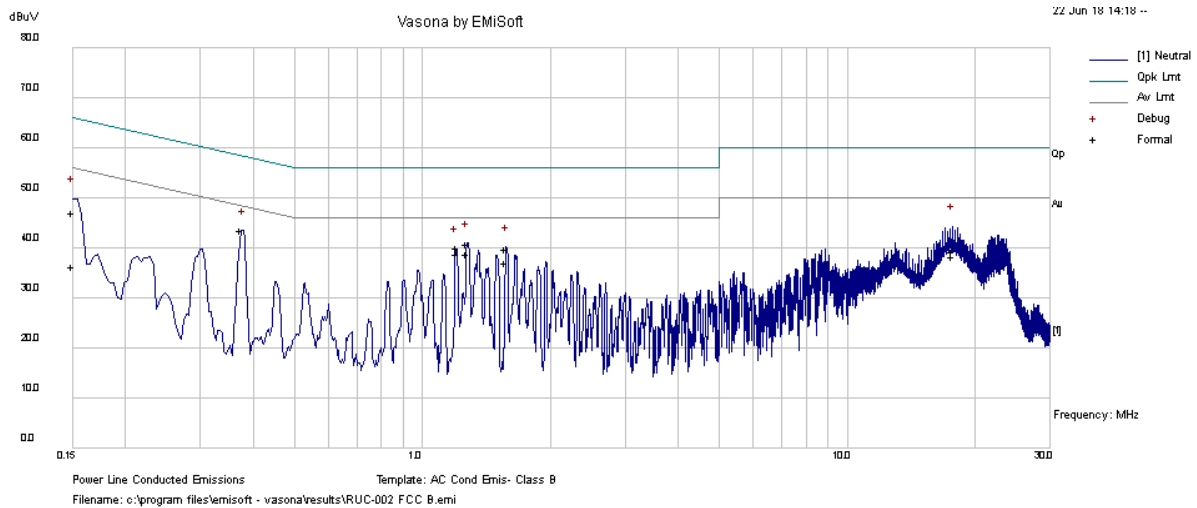


Neutral Plot at 120Vac, 60Hz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	Factors (dB)	Level (dBuV)	Measurement Type	Line / Neutral	Limit (dBuV)	Margin (dB)	Pass /Fail
0.37	34.17	9.33	0.04	43.53	Quasi Peak	Neutral	58.41	-14.88	Pass
1.28	31.46	9.33	0.05	40.85	Quasi Peak	Neutral	56	-15.15	Pass
17.72	29.4	9.43	0.42	39.25	Quasi Peak	Neutral	60	-20.75	Pass
1.57	30.39	9.34	0.06	39.79	Quasi Peak	Neutral	56	-16.21	Pass
1.20	30.6	9.33	0.05	39.99	Quasi Peak	Neutral	56	-16.01	Pass
0.15	37.7	9.33	0.05	47.08	Quasi Peak	Neutral	66	-18.92	Pass
0.37	34.13	9.33	0.04	43.5	Average	Neutral	48.41	-4.91	Pass
1.28	29.46	9.33	0.05	38.84	Average	Neutral	46	-7.16	Pass
17.72	28.45	9.43	0.42	38.3	Average	Neutral	50	-11.7	Pass
1.57	27.65	9.34	0.06	37.05	Average	Neutral	46	-8.95	Pass
1.20	29.54	9.33	0.05	38.92	Average	Neutral	46	-7.08	Pass
0.15	26.86	9.33	0.05	36.24	Average	Neutral	56	-19.76	Pass

## 10.2 26 dB Bandwidth & 6 dB Bandwidth

Requirement(s):

Spec	Item	Requirement	Applicable
§ 15.407	-	26 dB Emission BW: Report only for reference.	<input checked="" type="checkbox"/>
	a) (2)	26 dB Emission BW: Report only for power limit calculation.	<input type="checkbox"/>
	e)	Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>789033 D02 General UNII Test Procedures New Rules v01r02</p> <p><u>26dB Emission bandwidth measurement procedure (Other than 5.725-5.85 GHz)</u></p> <ul style="list-style-type: none"> <li>- Allow the trace to stabilize.</li> <li>- Use the spectrum analyzer built-in measurement function to determine the 26dB BW. <ul style="list-style-type: none"> <li>o Set RBW = around 1% of emission bandwidth</li> <li>o Set VBW &gt; RBW</li> <li>o Detector = Peak</li> <li>o Trace mode = max hold</li> </ul> </li> <li>- Capture the plot.</li> <li>- Repeat above steps for different test channel and other modulation type.</li> </ul> <p><u>6 dB Minimum emission bandwidth measurement procedure (for 5.725-5.85 GHz)</u></p> <ul style="list-style-type: none"> <li>- Allow the trace to stabilize.</li> <li>- Use the spectrum analyzer built-in measurement function to determine the 6dB BW. <ul style="list-style-type: none"> <li>o Set RBW = 100 KHz</li> <li>o <b>Set VBW ≥ 3 x RBW</b></li> <li>o Detector = Peak</li> <li>o Trace mode = max hold</li> <li>o Sweep = auto couple</li> </ul> </li> <li>- Capture the plot.</li> <li>- Repeat above steps for different test channel and other modulation type.</li> </ul>		
Test Date	05/17/2018 – 06/20/2018	Environmental condition	Temperature 22°C Relative Humidity 38% Atmospheric Pressure 1020mbar
Remark	99% BW result is presented here to show the channels in 5.1GHz is not crossing to DFS channel since the 26 dB BW is too wide.		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data     Yes       N/A  
 Test Plot     Yes       N/A

Test was done by Chen Ge at RF test site.

26dB Bandwidth measurement result for 5.2GHz

Type	Test mode	Freq (MHz)	CH	Result (MHz)	Limit (MHz)
26dB BW	802.11a	5180	Low	22.144	-
		5200	Mid	21.844	-
		5240	High	21.470	-
	802.11ax-20	5180	Low	22.066	-
		5200	Mid	22.324	-
		5240	High	22.349	-
	802.11ax-40	5190	Low	41.613	-
		5230	High	43.088	-
	802.11ax-80	5210	Mid	44.055	-

6dB Bandwidth measurement result for 5.8GHz

Type	Test mode	Freq (MHz)	CH	Result (MHz)	Limit (MHz)	Result
6dB BW	802.11a	5745	Low	16.537	≥0.5	Pass
		5785	Mid	16.546	≥0.5	Pass
		5825	High	16.550	≥0.5	Pass
	802.11ax-20	5745	Low	19.120	≥0.5	Pass
		5785	Mid	18.790	≥0.5	Pass
		5825	High	19.100	≥0.5	Pass
	802.11ax-40	5755	Low	38.070	≥0.5	Pass
		5795	High	38.180	≥0.5	Pass
	802.11ax-80	5775	Mid	78.020	≥0.5	Pass

99% Bandwidth Measurement Result for 5.2GHz

Type	Test mode	Freq (MHz)	CH	Result (MHz)	Limit
99% OBW	802.11a	5180	Low	18.982	-
		5200	Mid	18.995	-
		5240	High	19.002	-
	802.11ax-20	5180	Low	19.020	-
		5200	Mid	19.055	-
		5240	High	19.039	-
	802.11ax-40	5190	Low	37.972	-
		5230	High	37.943	-
	802.11ax-80	5210	Mid	38.168	-




26dB Bandwidth Test Plots  
W52:




802.11a-5180MHz




802.11a-5200MHz

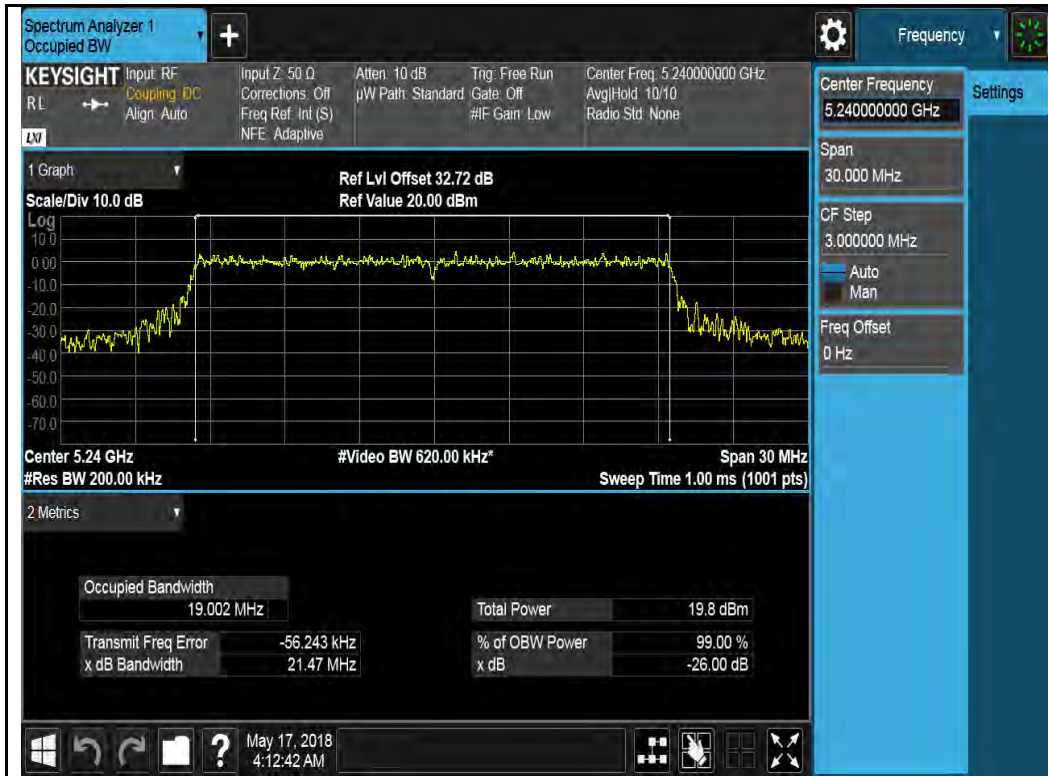


802.11a-5240MHz

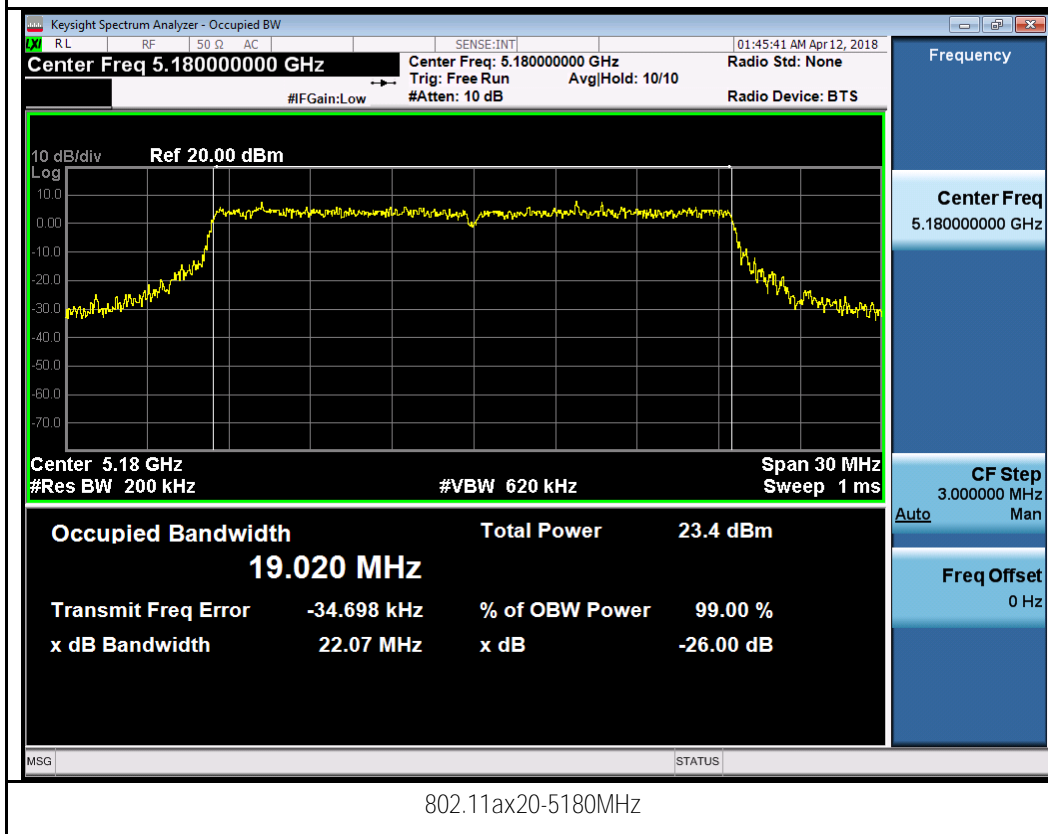


802.11ax20-5180MHz

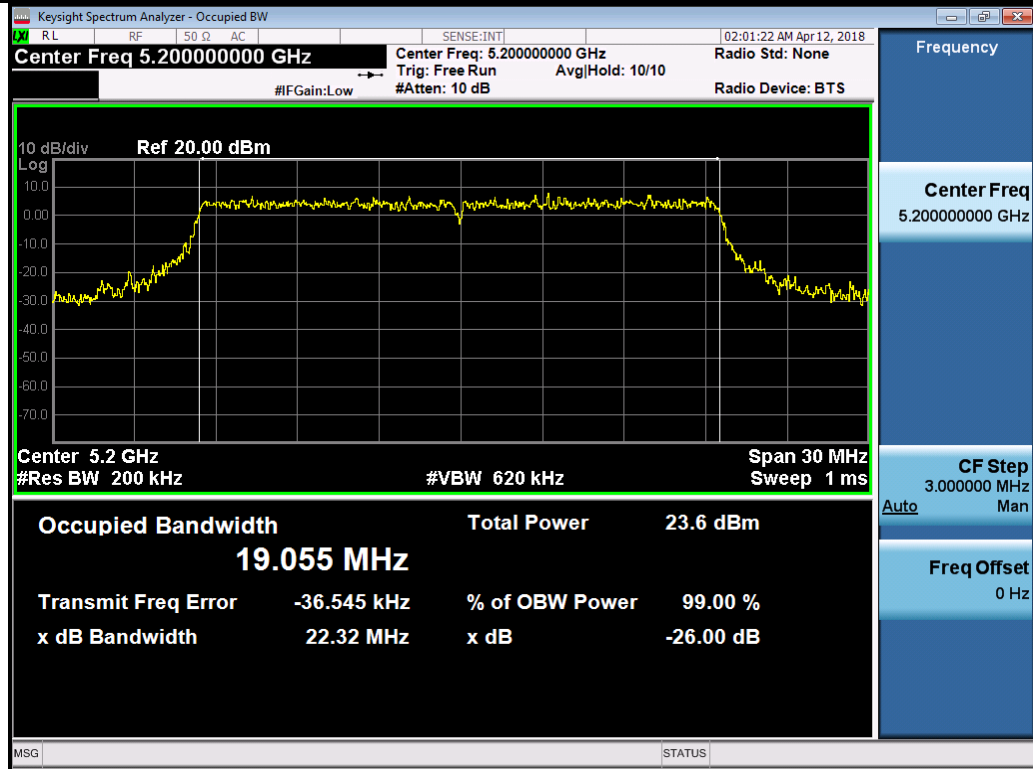


802.11ax20-5200MHz

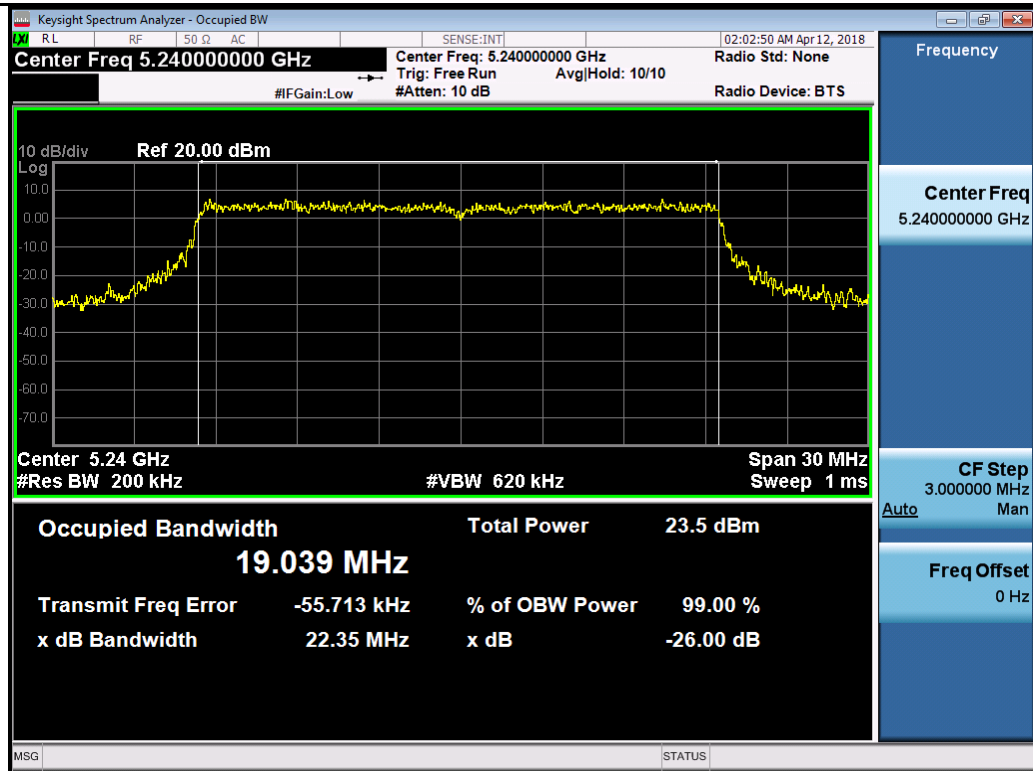


802.11ax20-5240MHz

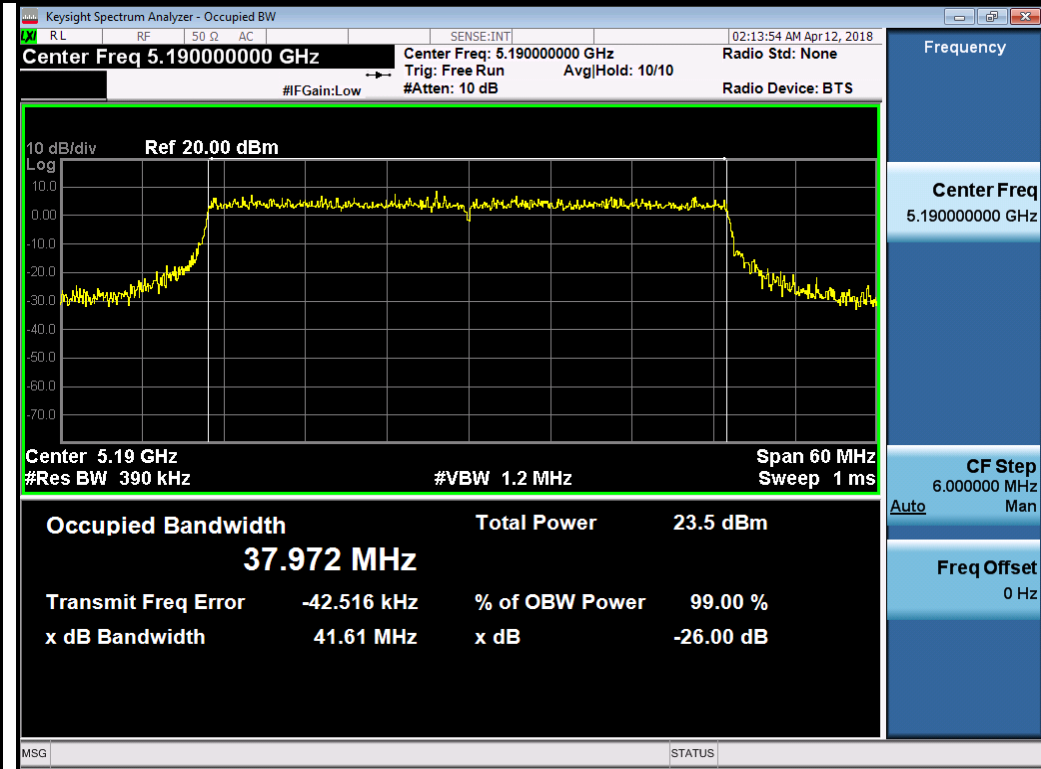

802.11ax40-5190MHz

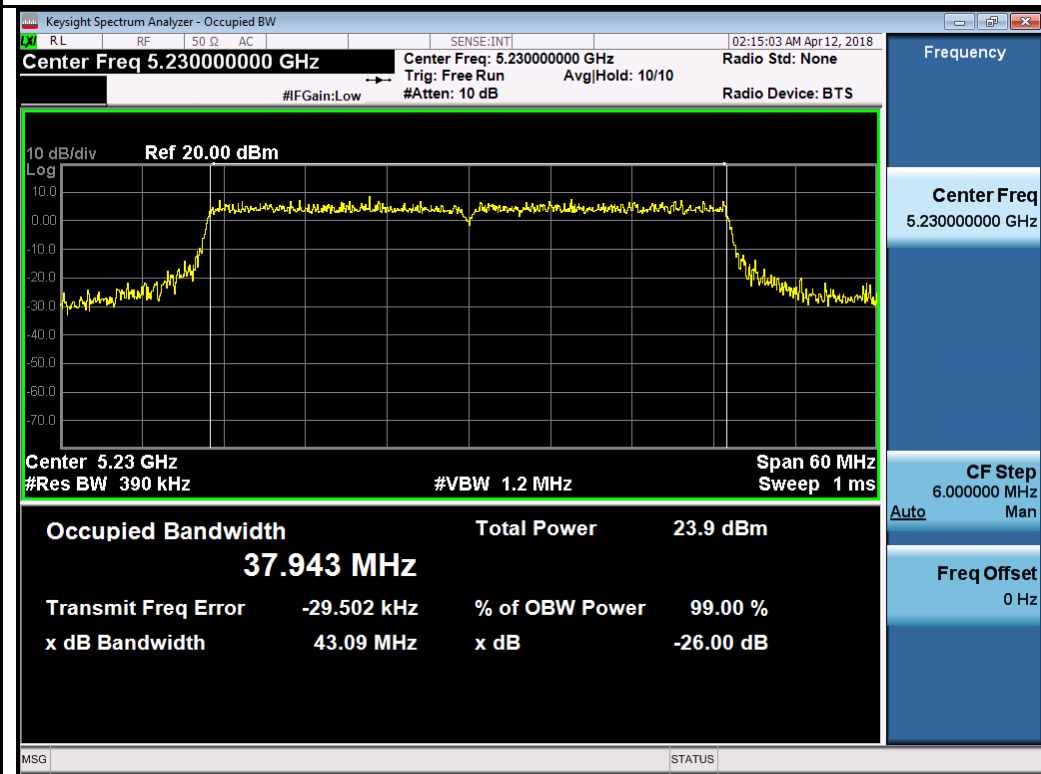


802.11ax40-5230MHz

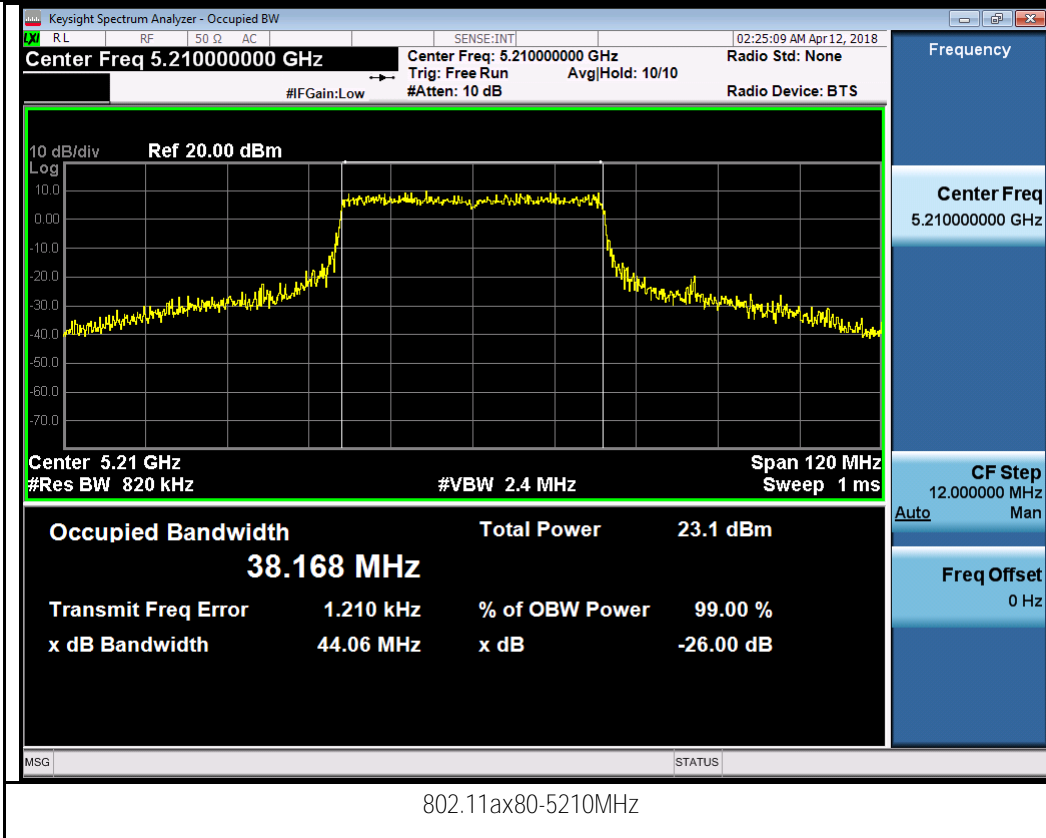


6dB Bandwidth Test Plots  
W58:




802.11a-5745MHz

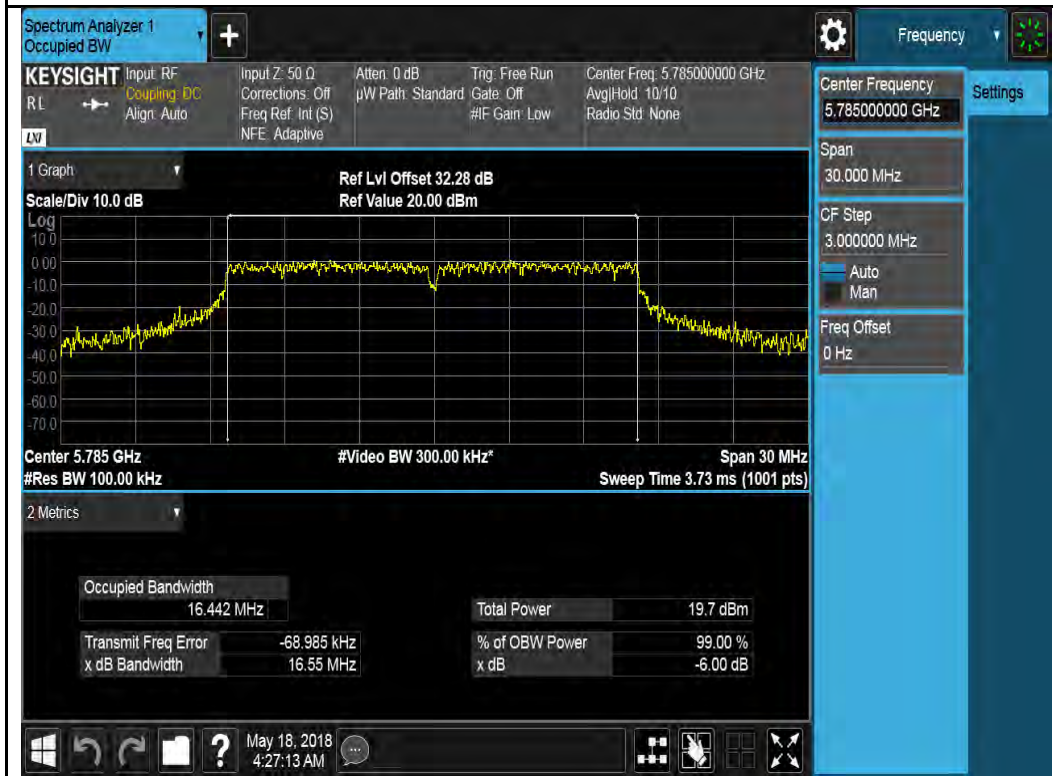


802.11a-5785MHz

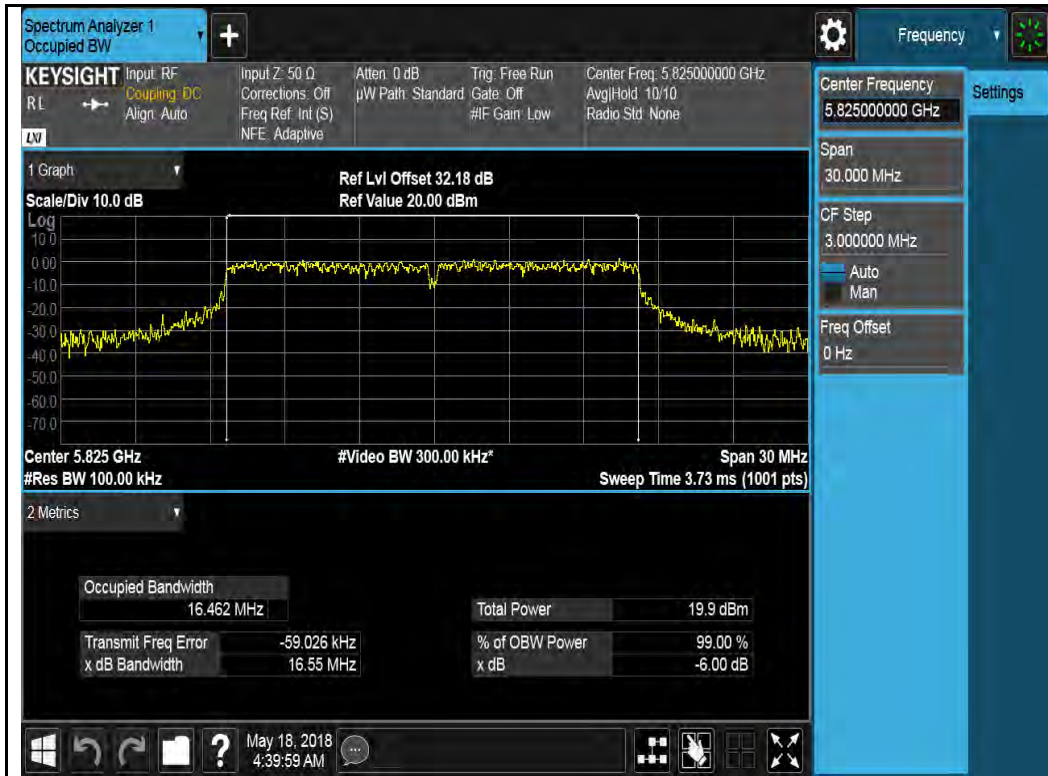


802.11a-5825MHz

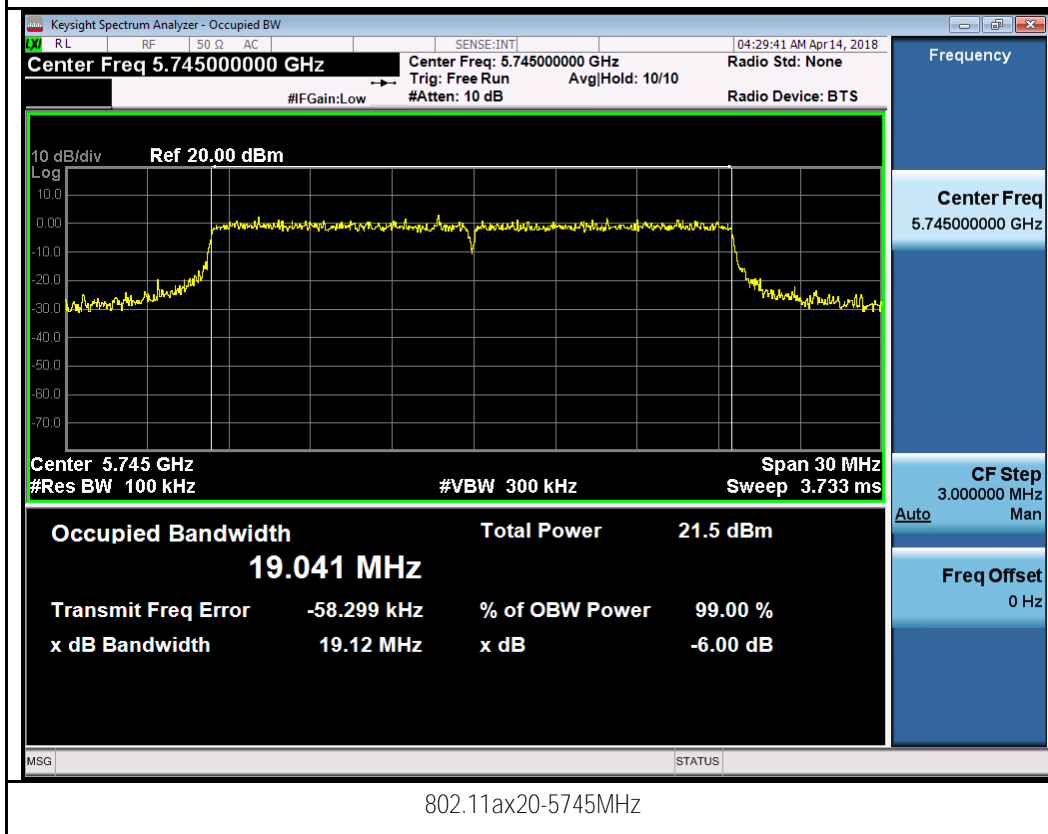

802.11ax20-5745MHz

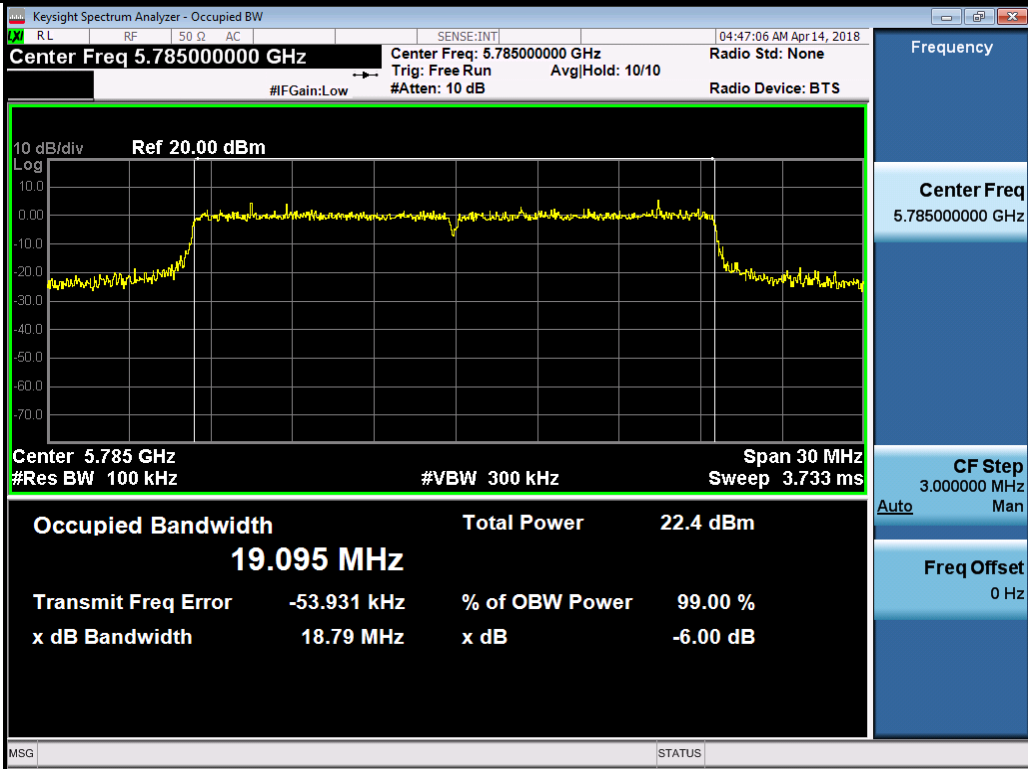


802.11ax20-5785MHz

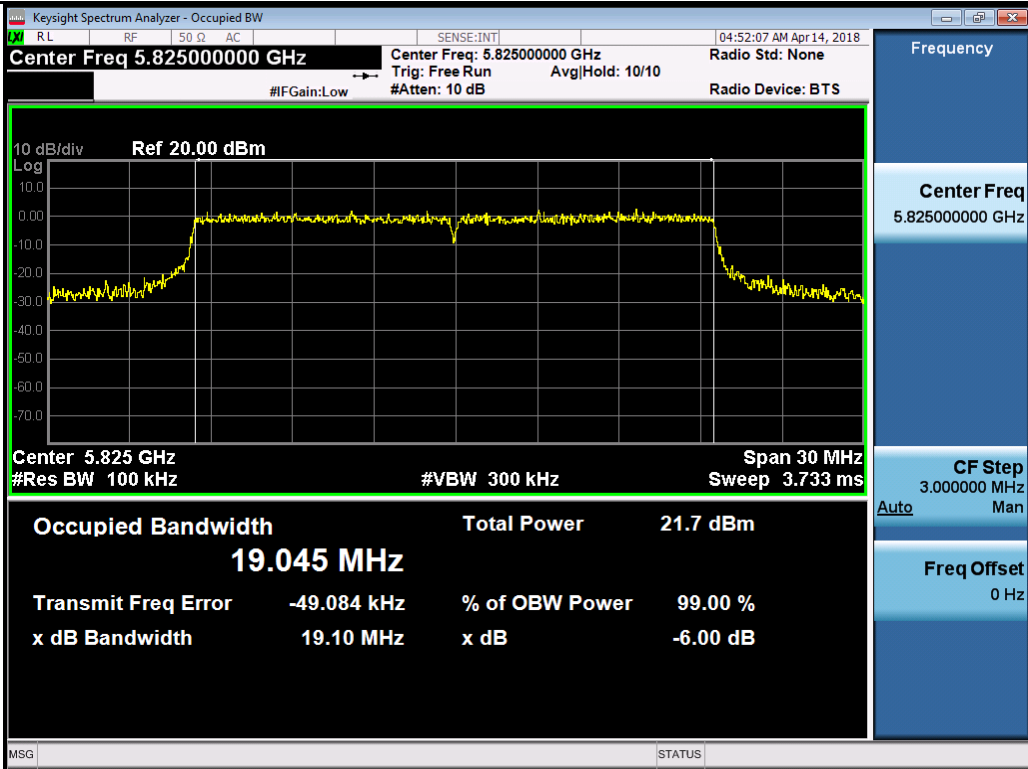


802.11ax20-5825MHz




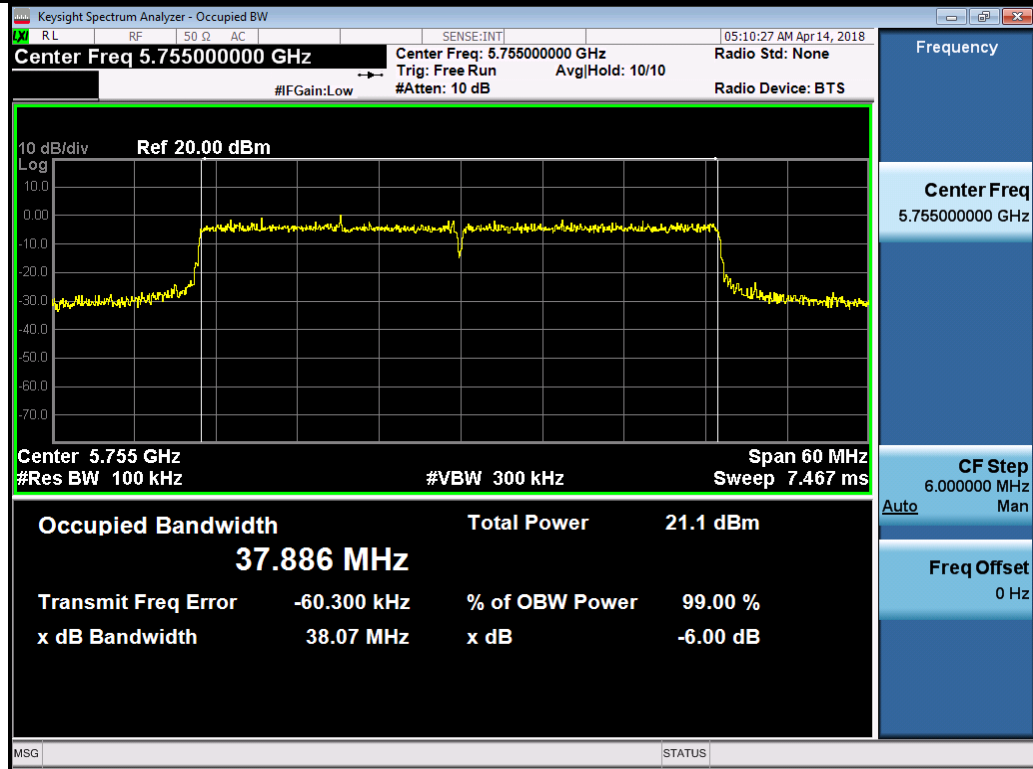

802.11ax40-5755MHz

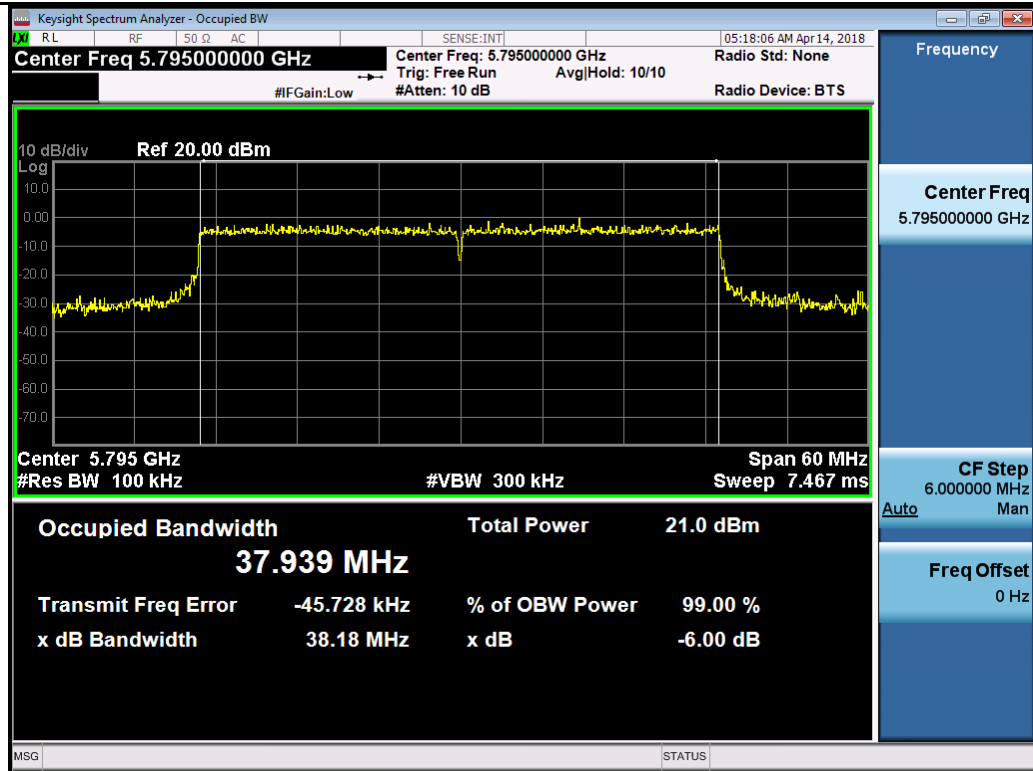


802.11ax40-5795MHz

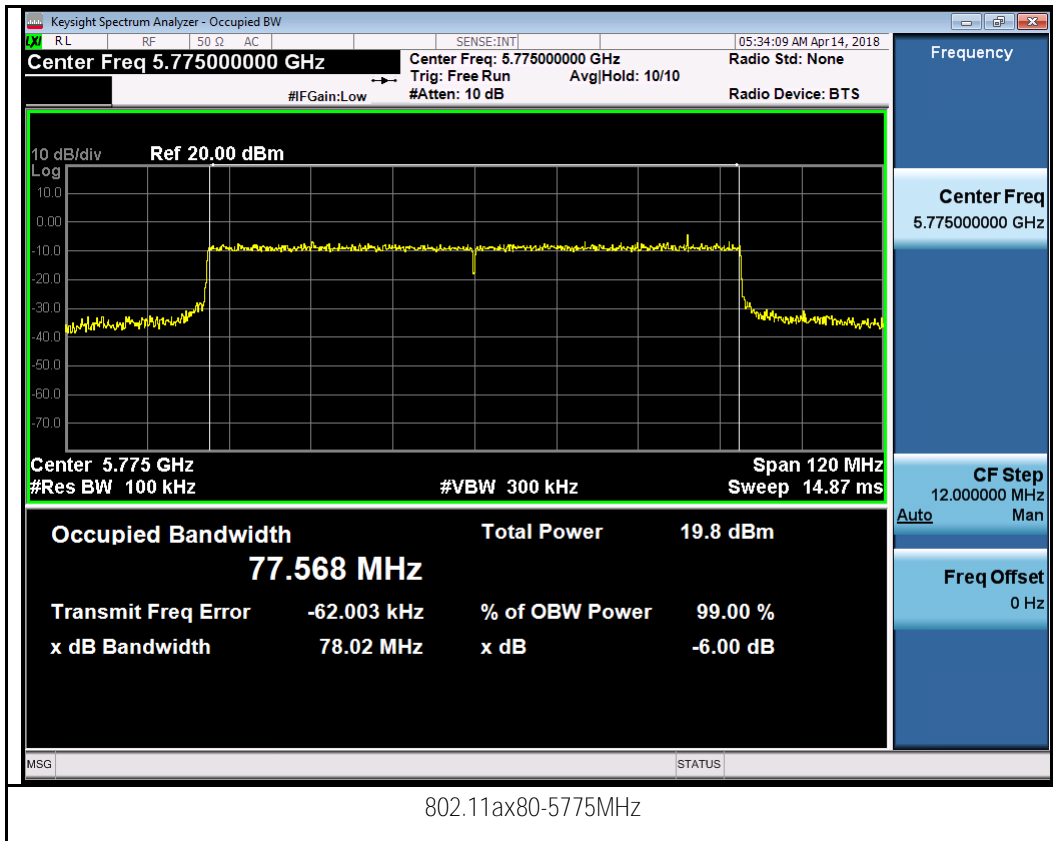

### 10.3 Output Power

Requirement(s):

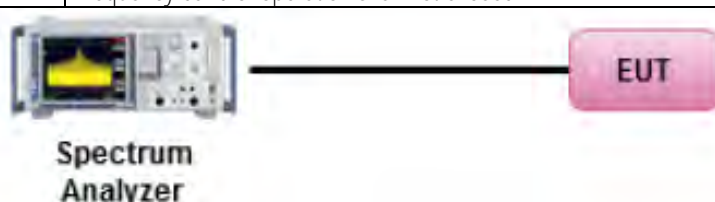Spec	Item	Requirement	Applicable
§ 15.407	a)(1)(ii)	For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.	<input checked="" type="checkbox"/>
	a)(3)	For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>789033 D02 General UNII Test Procedures New Rules v01r02</p> <p><u>Measurement using a Spectrum Analyzer or EMI Receiver (SA)</u> Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep):</p> <ul style="list-style-type: none"> <li>(i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.</li> <li>(ii) Set RBW = 1 MHz</li> <li>(iii) Set VBW = 3 MHz</li> <li>(iv) <b>Number of points in sweep <math>\geq 2 \times \text{span} / \text{RBW}</math>. (This ensures that bin-to-bin spacing is <math>\leq \text{RBW}/2</math>, so that narrowband signals are not lost between frequency bins.)</b></li> <li>(v) Sweep time = auto.</li> <li>(vi) Detector = power averaging (rms), if available. Otherwise, use sample detector mode.</li> <li>(vii) If transmit duty cycle &lt; 98%, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or <b>at duty cycle <math>\geq 98\%</math>, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run."</b></li> <li>(viii) Trace average at least 100 traces in power averaging (rms) mode.</li> <li>(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.</li> </ul>		
Test Date	05/17/2018 – 07/11/2018	Environmental condition	Temperature 21°C Relative Humidity 40% Atmospheric Pressure 1019mbar
Remark	8x8 mode: The EUT has 8 antennas with 6 vertical and 2 horizontal, individual gain = 1.5dBi, the directional gain = $1.5 + 10 \cdot \log(6) = 9.2$ , therefore, the power and psd limit should decrease by $9.2 - 6 = 3.2\text{dB}$ . 4x4 mode: The EUT has 4 antennas with 3 vertical and 1 horizontal, individual gain = 1.5dBi, the directional gain = $1.5 + 10 \cdot \log(3) = 6.27$ , therefore, the power and psd limit should decrease by $6.27 - 6 = 0.27\text{dB}$ .		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data     Yes                       N/A

Test Plot     Yes (See below)       N/A

Test was done by Chen Ge at RF test site.

Output Power measurement result for 8x8 mode 5.2GHz


Test mode	Freq (MHz)	CH	Conducted Power (dBm)									Limit (dBm)	Result
			Chain No.										
			0	1	2	3	4	5	6	7	Total		
802.11a	5180	Low	17.03	15.83	16.69	17.44	16.38	15.52	16.01	16.26	25.47	26.8	Pass
	5200	Mid	16.69	16.39	17.31	17.67	16.58	15.62	16.00	16.27	25.65	26.8	Pass
	5240	High	15.81	16.01	16.22	17.83	16.37	15.16	15.65	16.09	25.24	26.8	Pass
802.11ax -20	5180	Low	17.22	17.18	17.39	18.64	17.26	16.74	17.20	17.26	26.42	26.8	Pass
	5200	Mid	17.37	16.24	17.61	18.58	17.40	16.96	17.22	17.19	26.40	26.8	Pass
	5240	High	17.35	16.91	18.21	18.86	17.81	17.36	17.18	17.37	26.69	26.8	Pass
802.11ax -40	5190	Low	17.44	17.34	17.70	18.39	17.20	16.69	17.37	17.19	26.47	26.8	Pass
	5230	Mid	17.70	16.66	17.60	18.54	17.14	16.39	17.31	17.29	26.41	26.8	Pass
802.11ax -80	5210	High	17.43	17.41	17.88	18.51	17.45	16.58	17.48	17.32	26.57	26.8	Pass

Output Power measurement result for 8x8 mode 5.8GHz

Test mode	Freq (MHz)	CH	Conducted Power (dBm)									Limit (dBm)	Result
			Chain No.										
			0	1	2	3	4	5	6	7	Total		
802.11a	5745	Low	16.82	17.44	16.42	17.69	17.59	17.40	17.41	17.45	26.33	26.8	Pass
	5785	Mid	16.04	16.50	15.32	17.45	16.77	16.61	16.24	16.33	25.48	26.8	Pass
	5825	Hig	16.19	16.71	15.35	16.28	16.95	16.53	16.04	16.22	25.34	26.8	Pass
802.11ax -20	5745	Low	16.66	17.24	16.21	17.28	16.98	16.87	16.75	16.69	25.88	26.8	Pass
	5785	Mid	17.36	17.45	16.46	18.16	17.94	17.27	17.41	17.10	26.45	26.8	Pass
	5825	Hig	16.89	17.66	16.16	17.42	17.70	17.26	17.01	17.36	26.24	26.8	Pass
802.11ax -40	5755	Low	16.98	16.50	16.15	17.55	17.32	17.24	16.95	16.75	25.98	26.8	Pass
	5795	Hig	16.87	17.84	16.56	18.46	17.97	18.07	17.42	17.39	26.64	26.8	Pass
802.11ax -80	5775	Low	16.90	17.22	16.48	17.64	17.37	17.46	16.89	16.77	26.14	26.8	Pass


Test Plot for W52:

Chain 0:

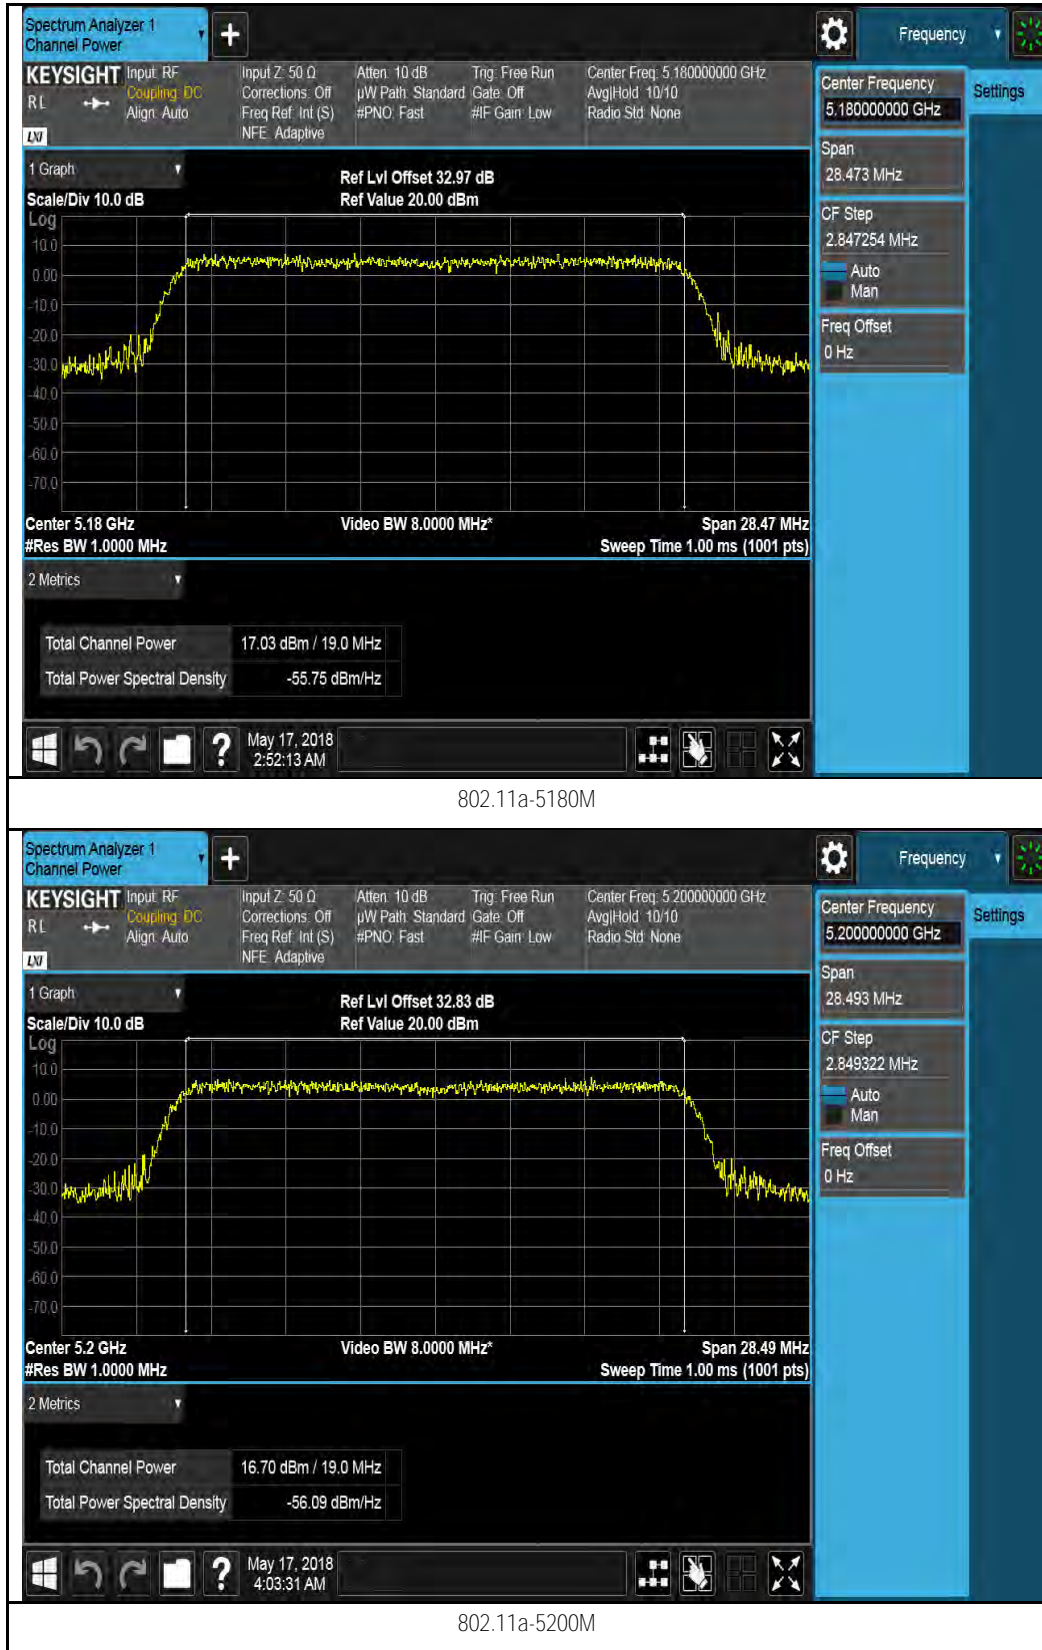





802.11a-5240M

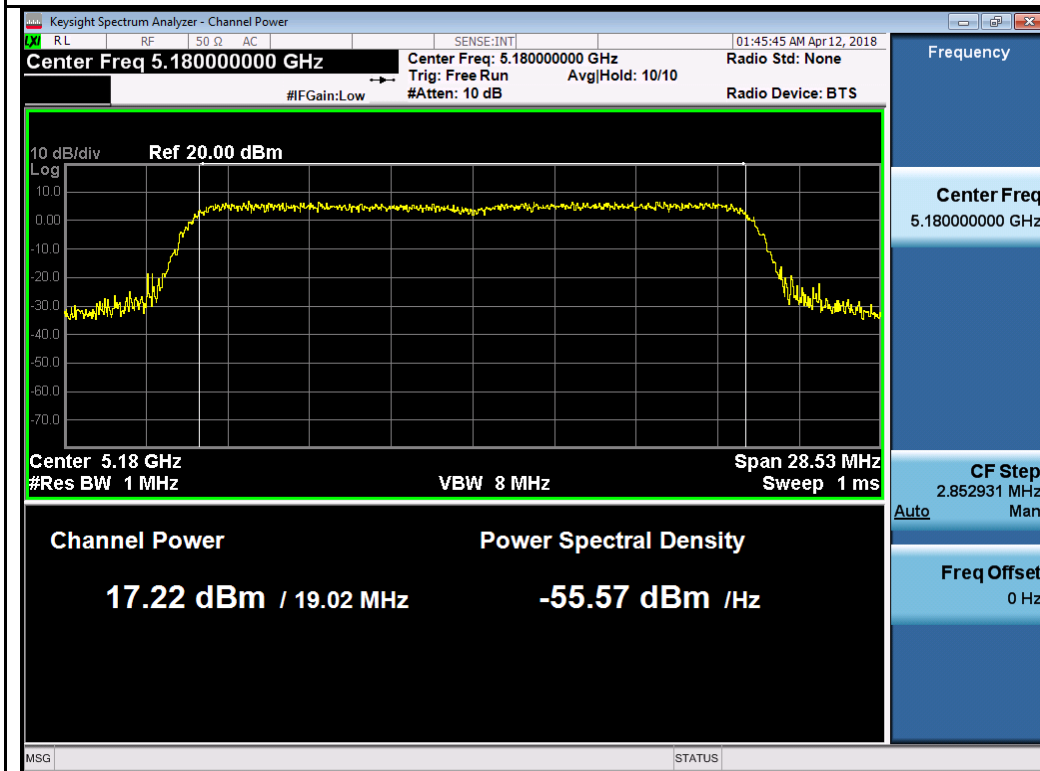


802.11ax20 5180M

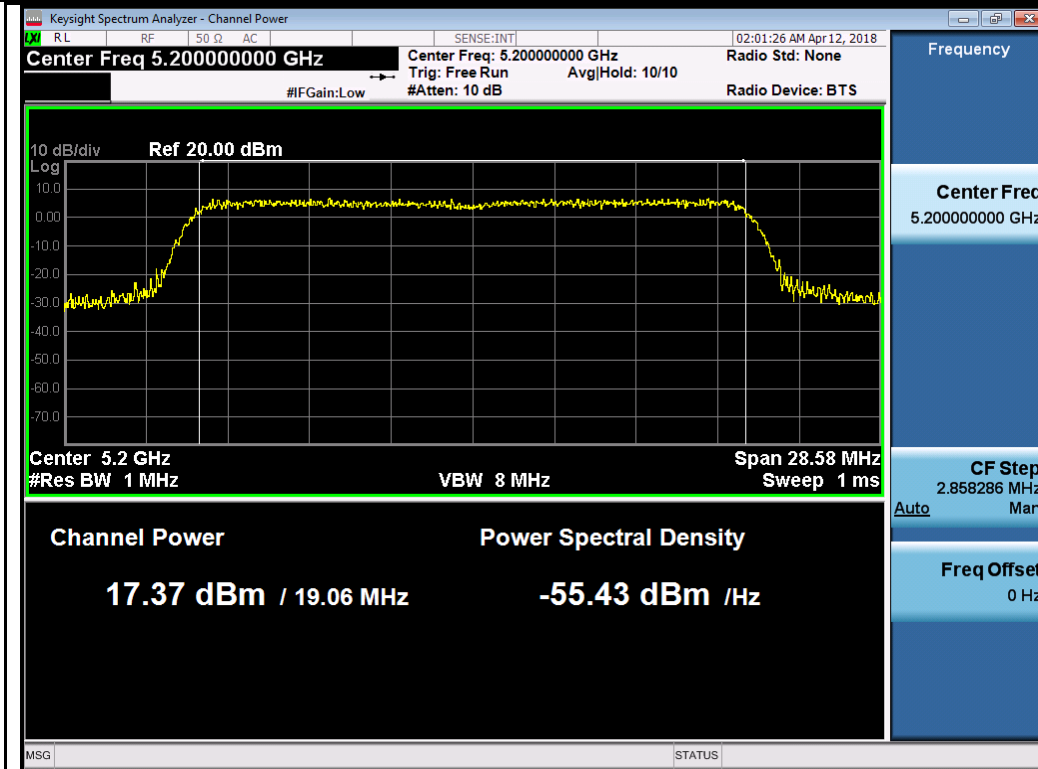


802.11ax20 5200M

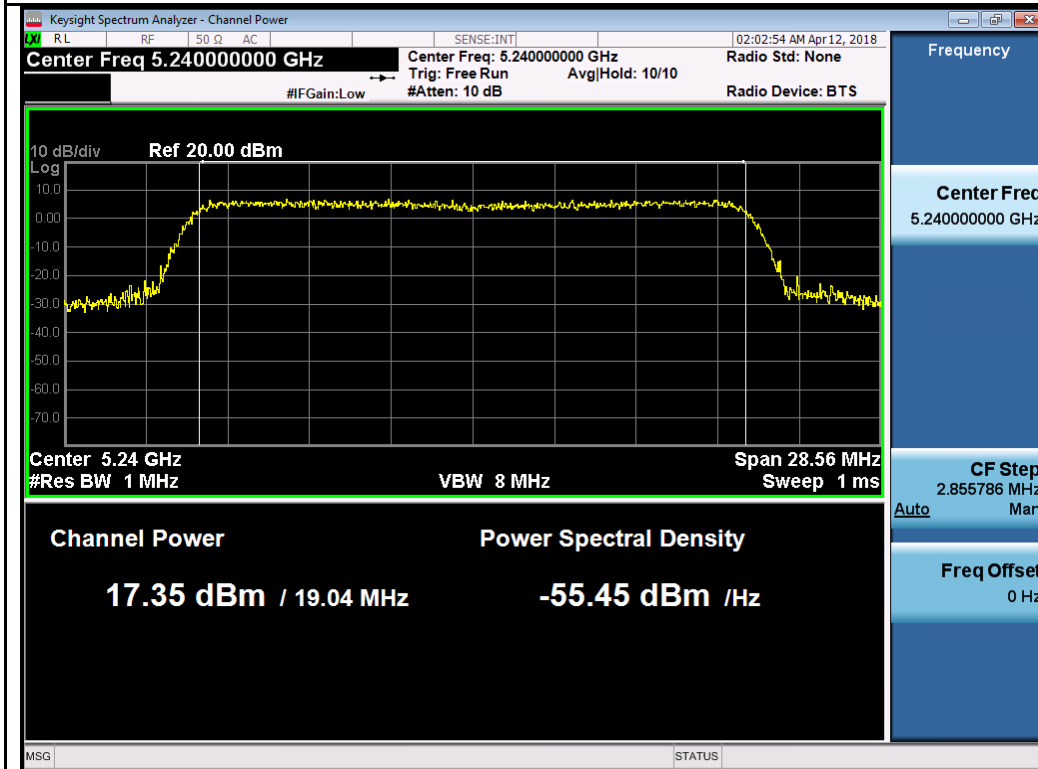

802.11ax20 5240M

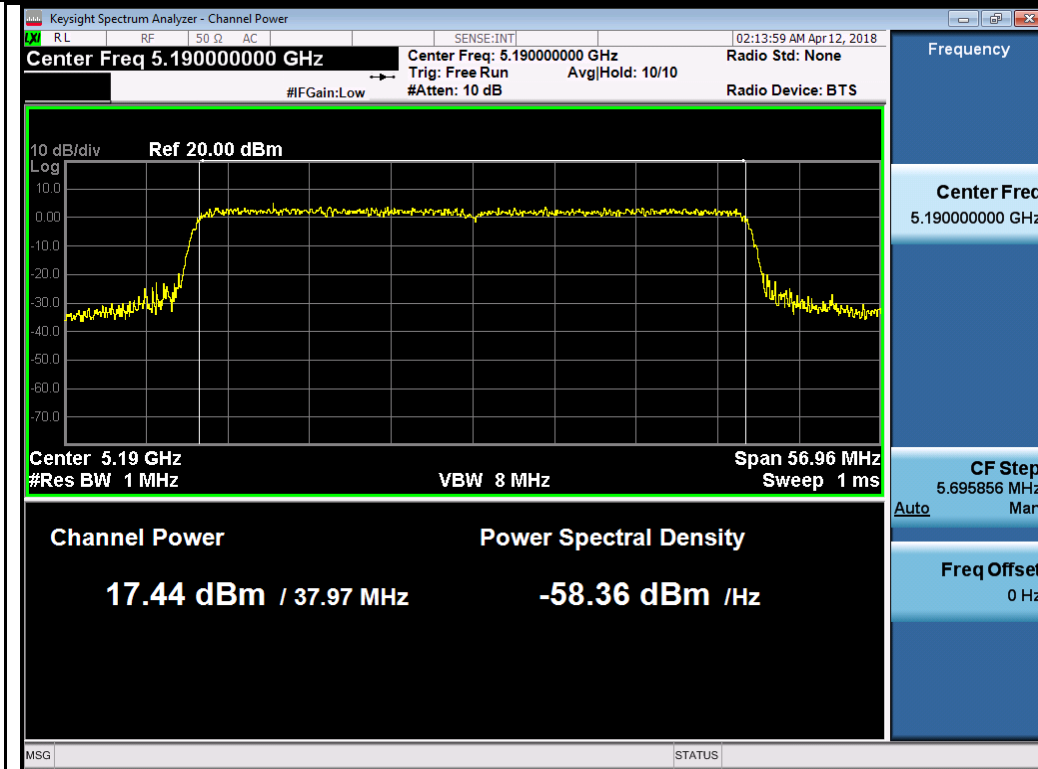


802.11ax40 5190M

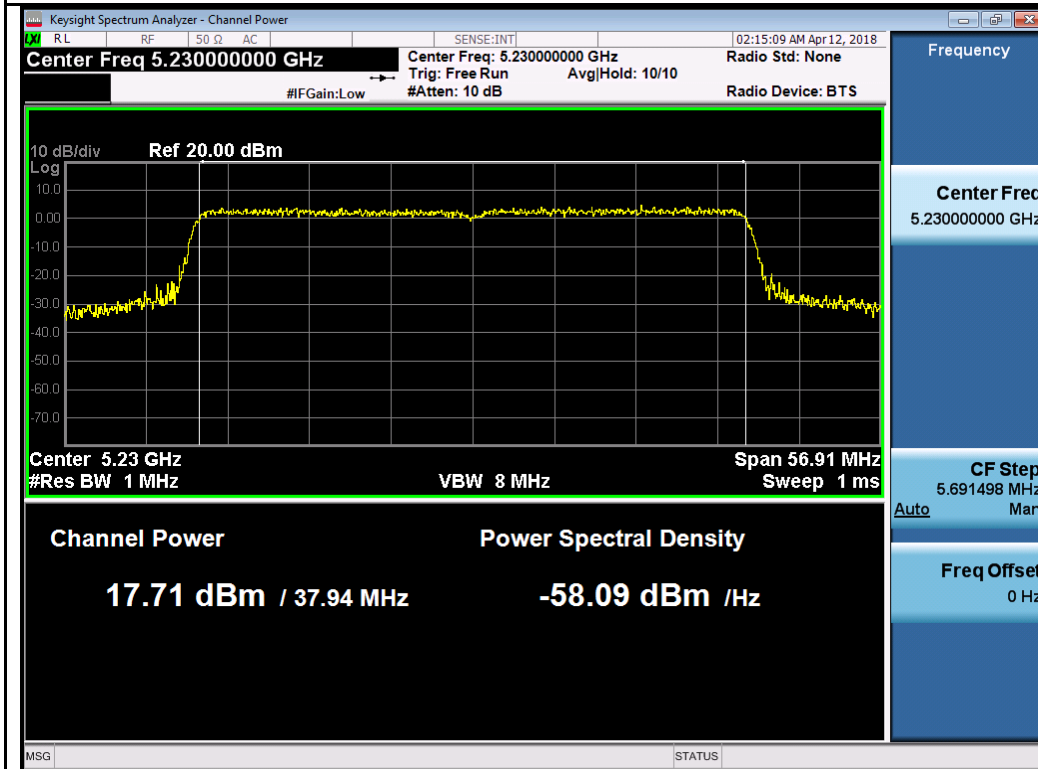

802.11ax40 5230M




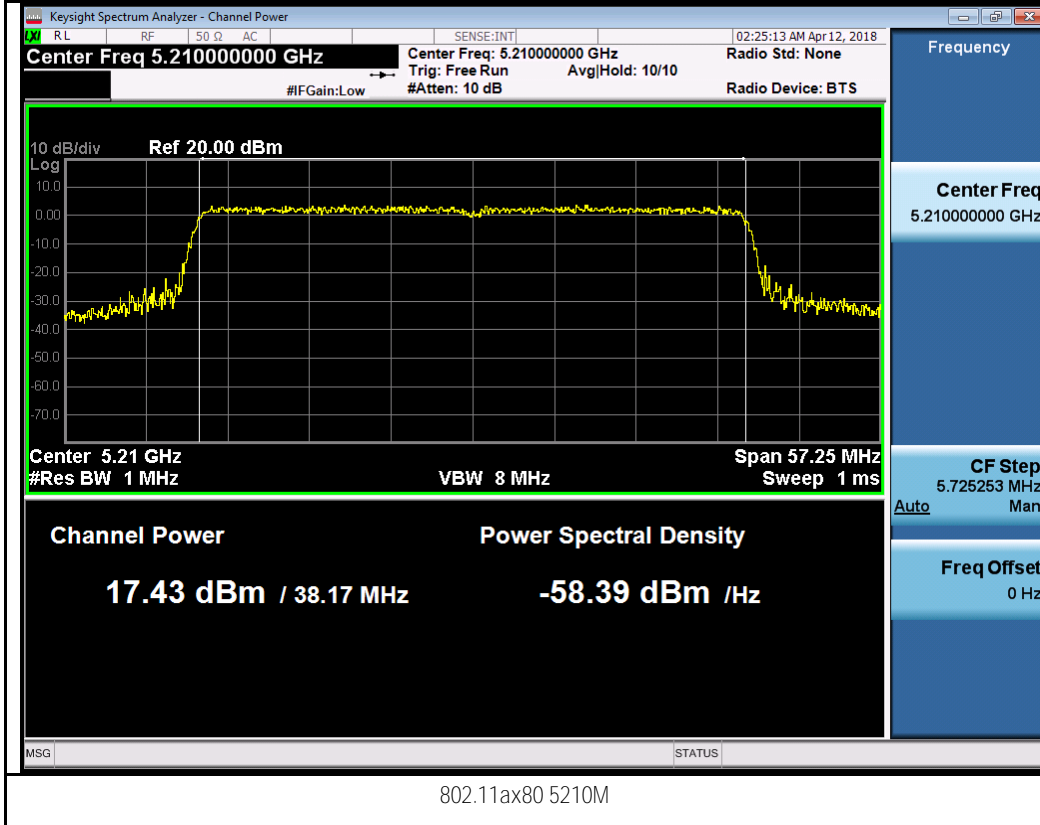


Chain 1:




802.11a-5180M

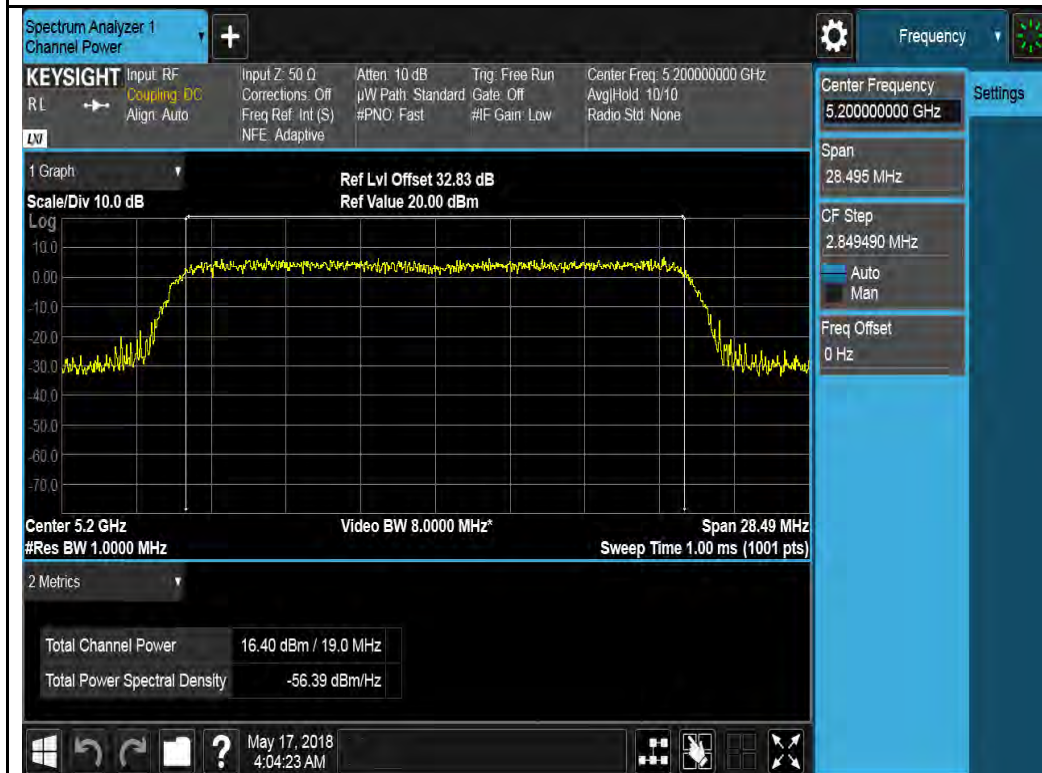


802.11a-5200M

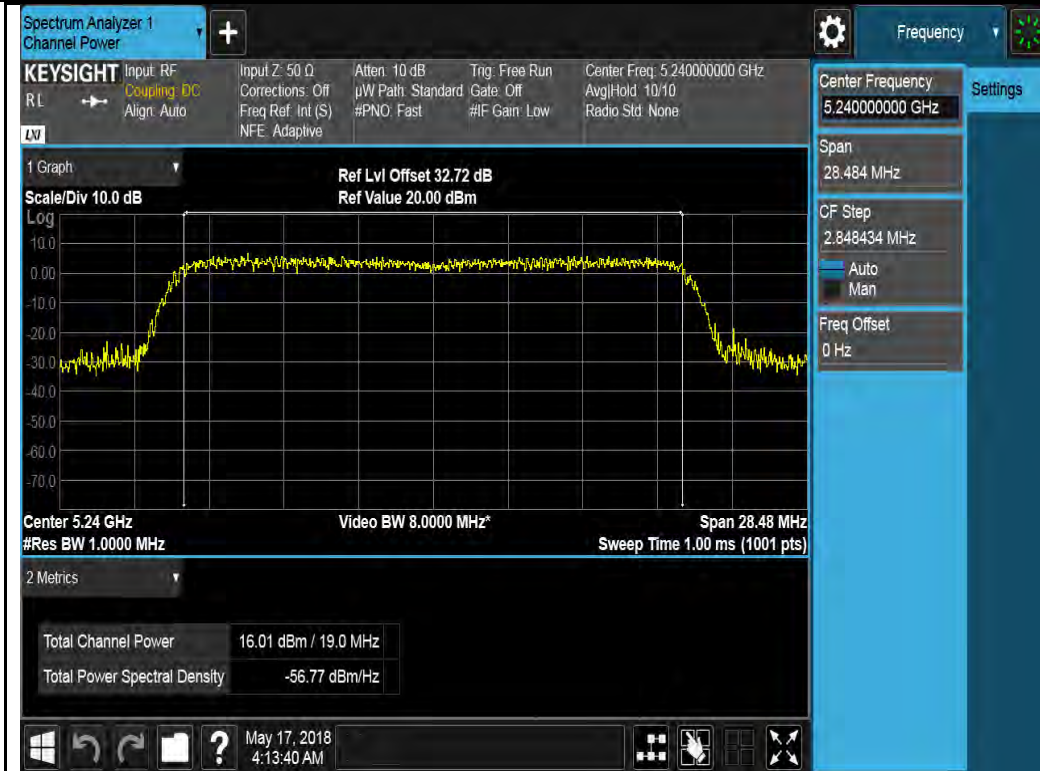


802.11a-5240M

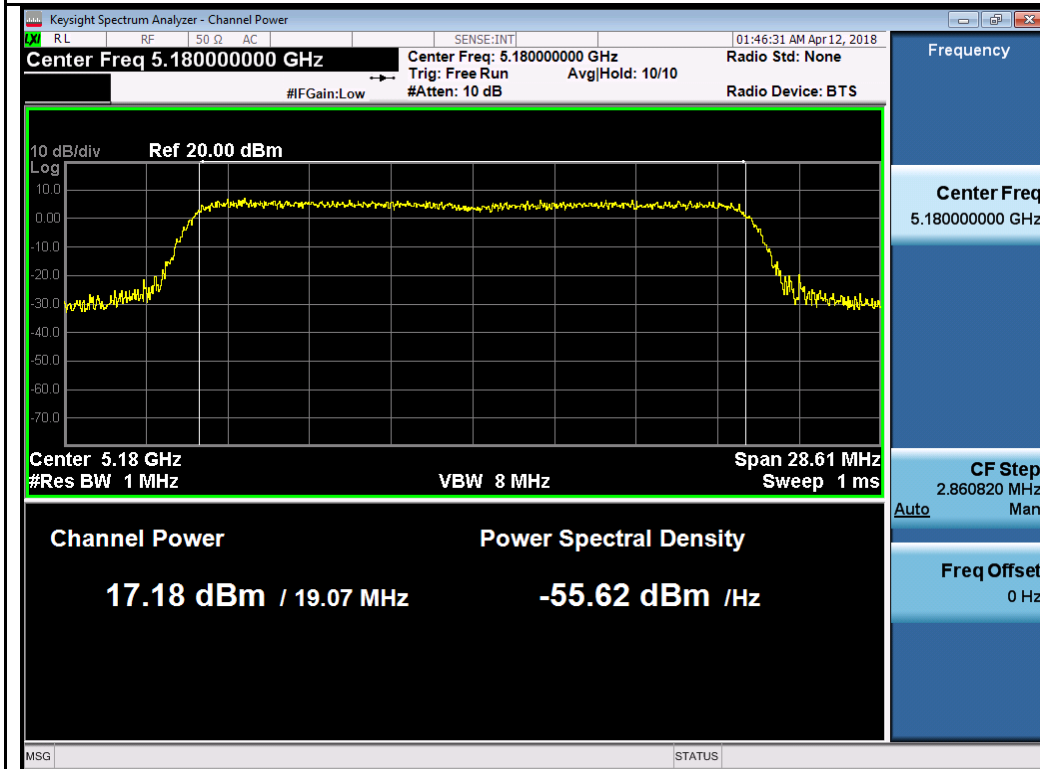


802.11ax20 5180M

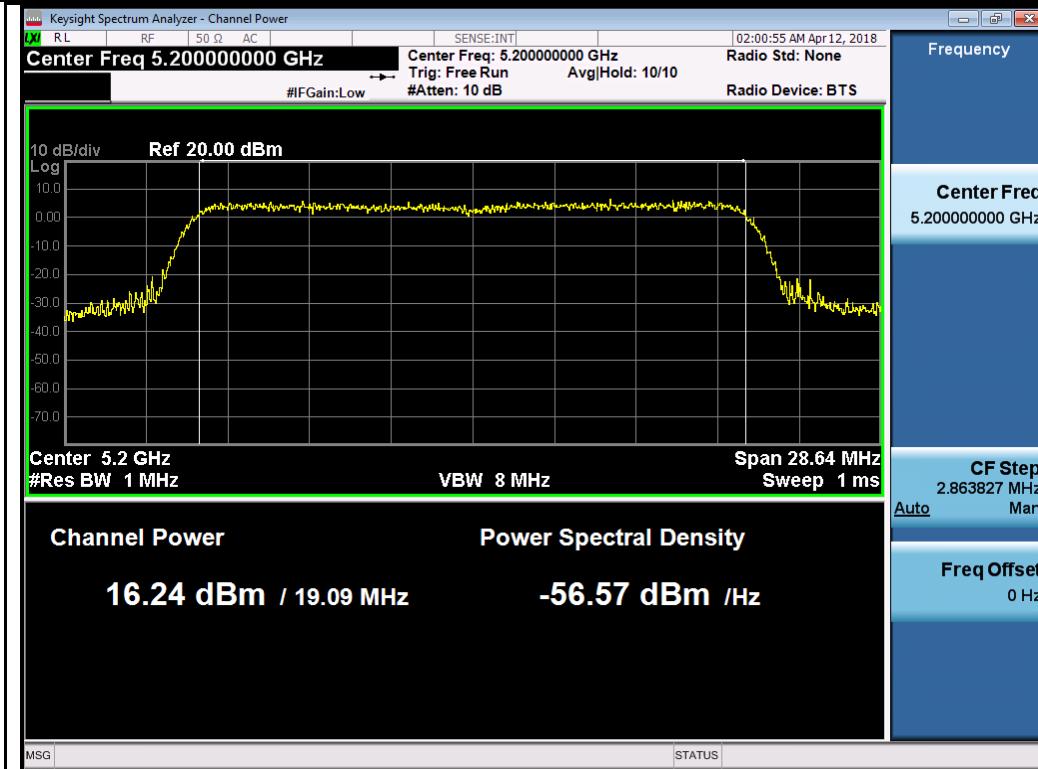


802.11ax20 5200M

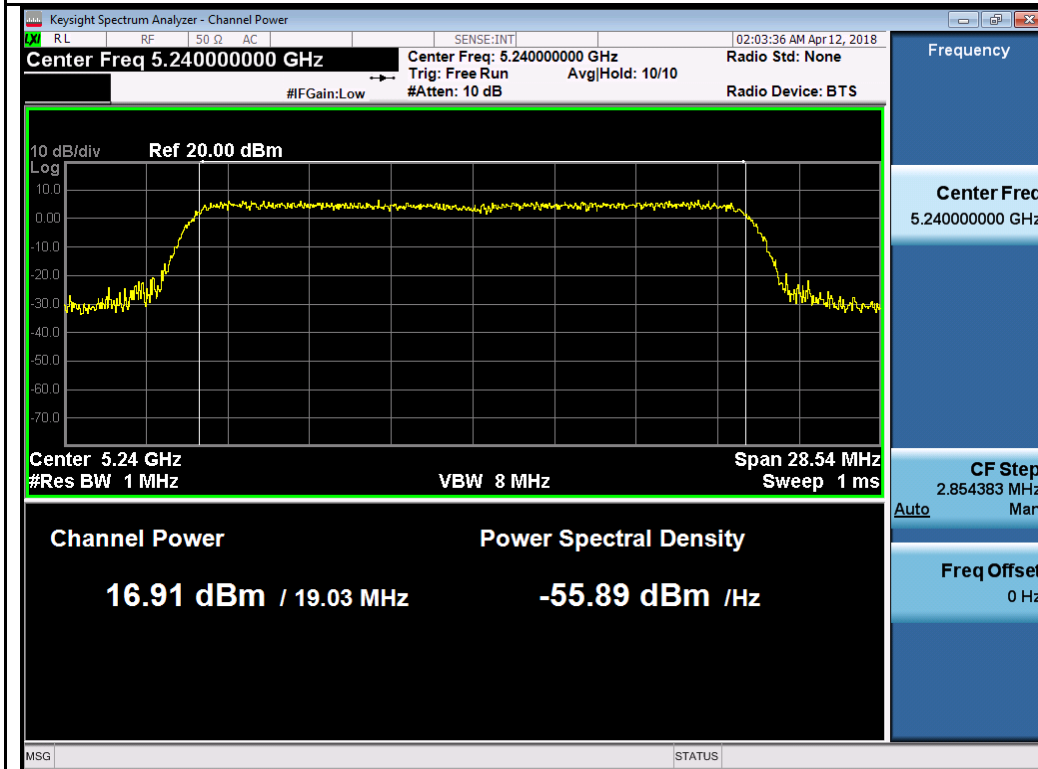


802.11ax20 5240M

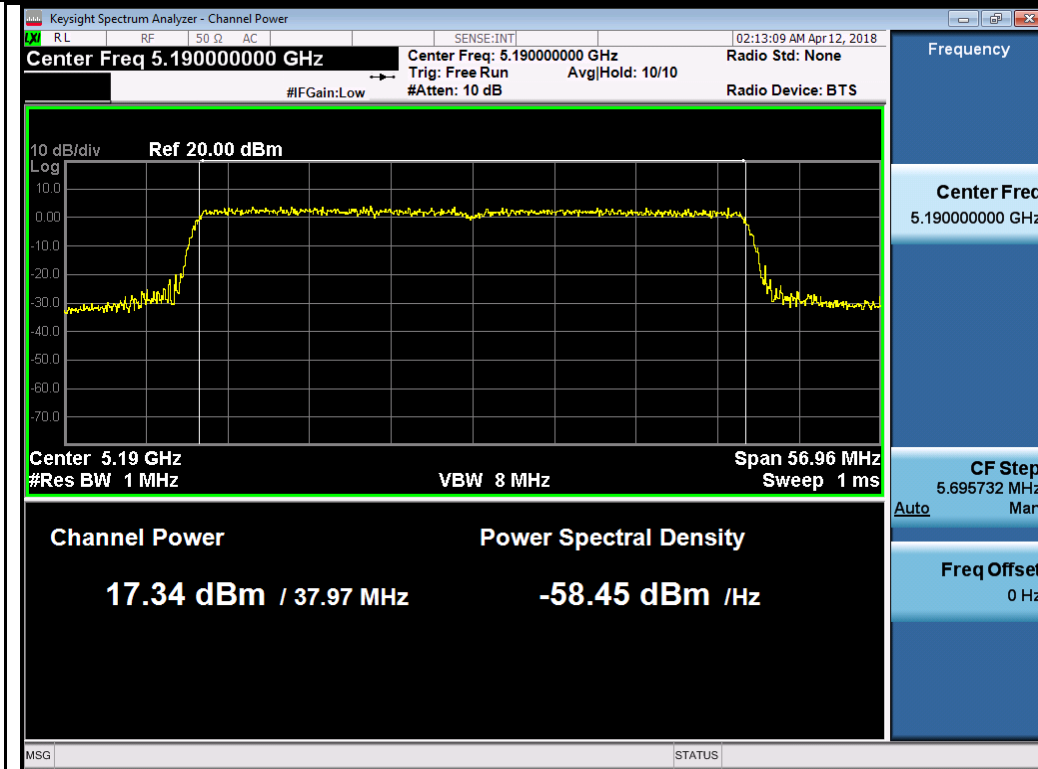


802.11ax40 5190M

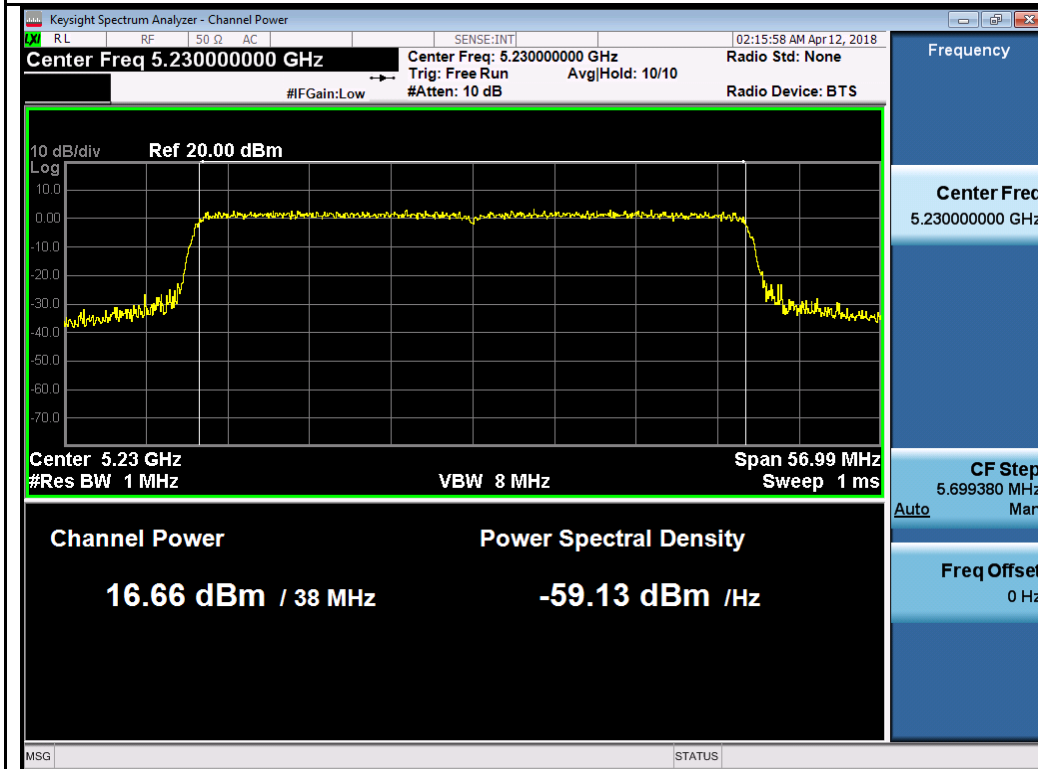


802.11ax40 5230M

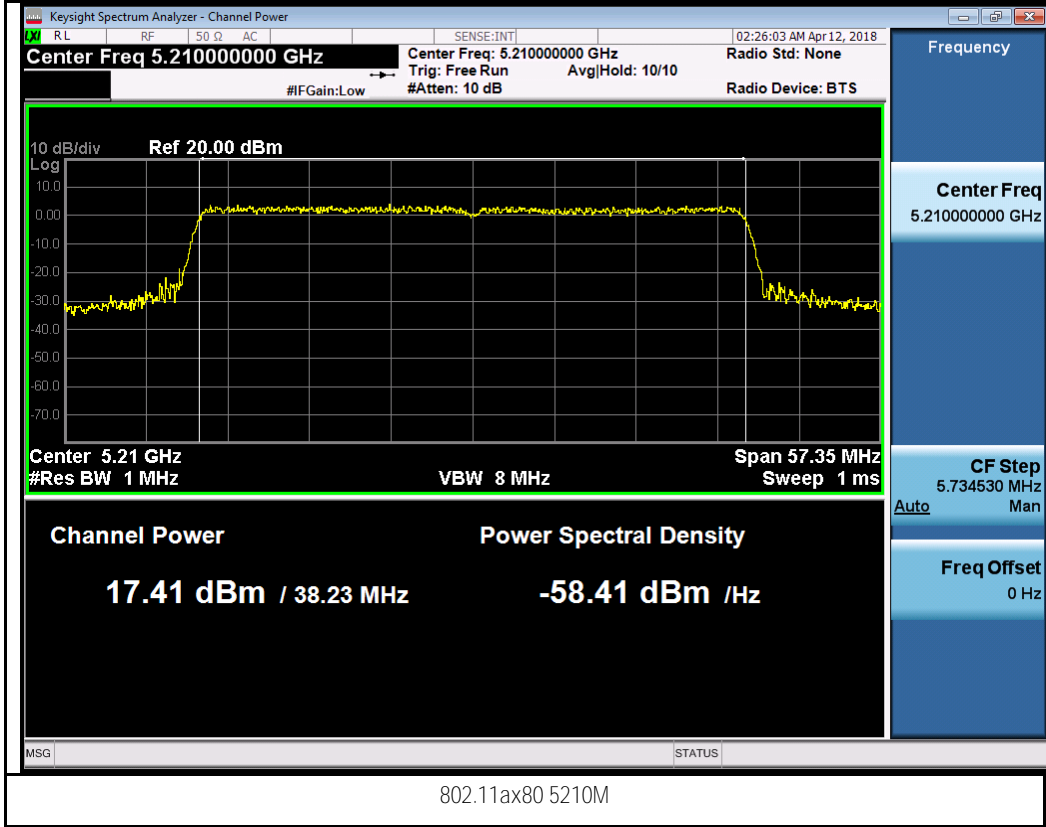

Chain 2:

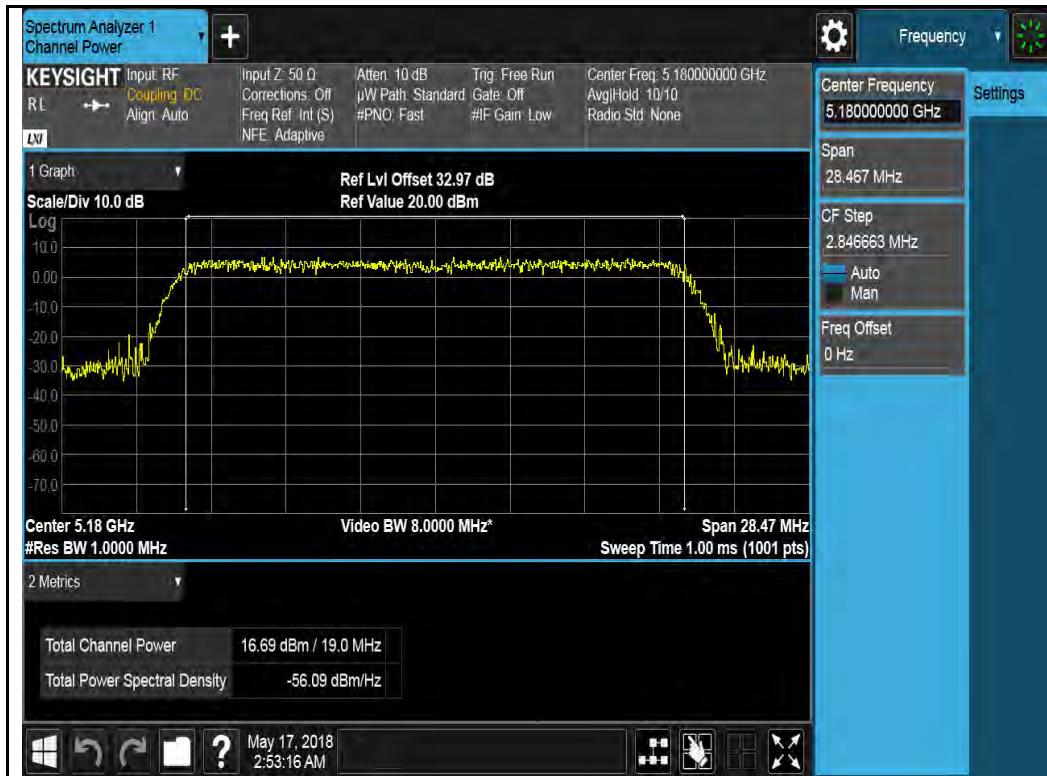


802.11a-5180M

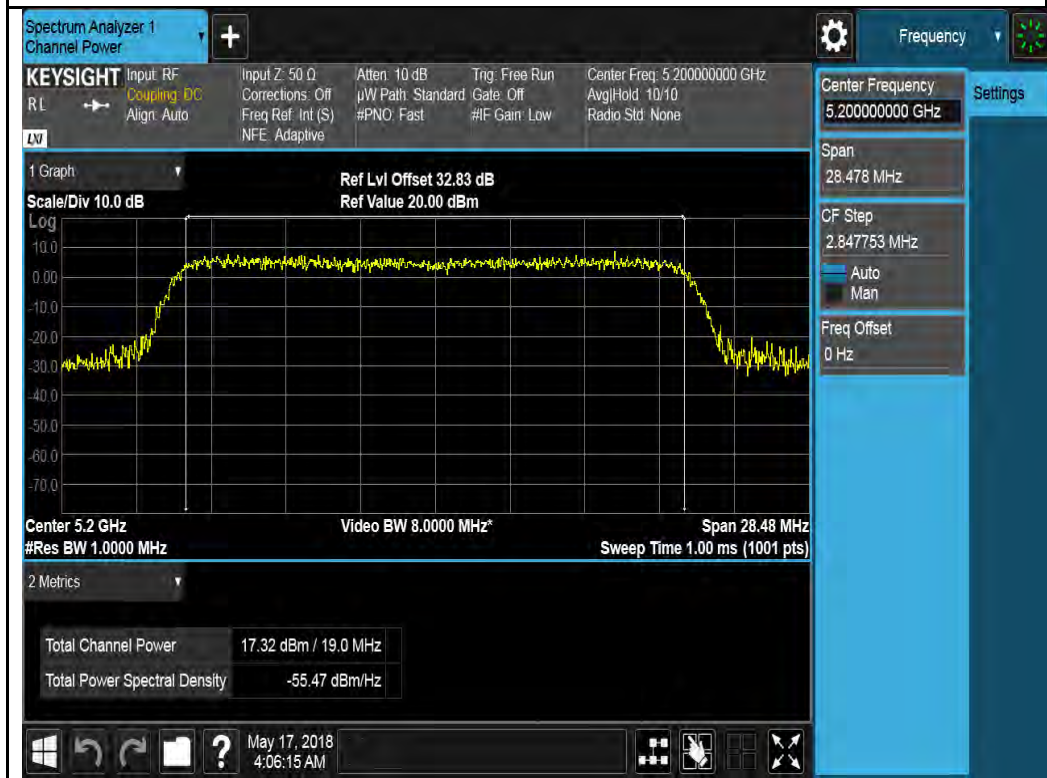

802.11a-5200M




802.11a-5240M

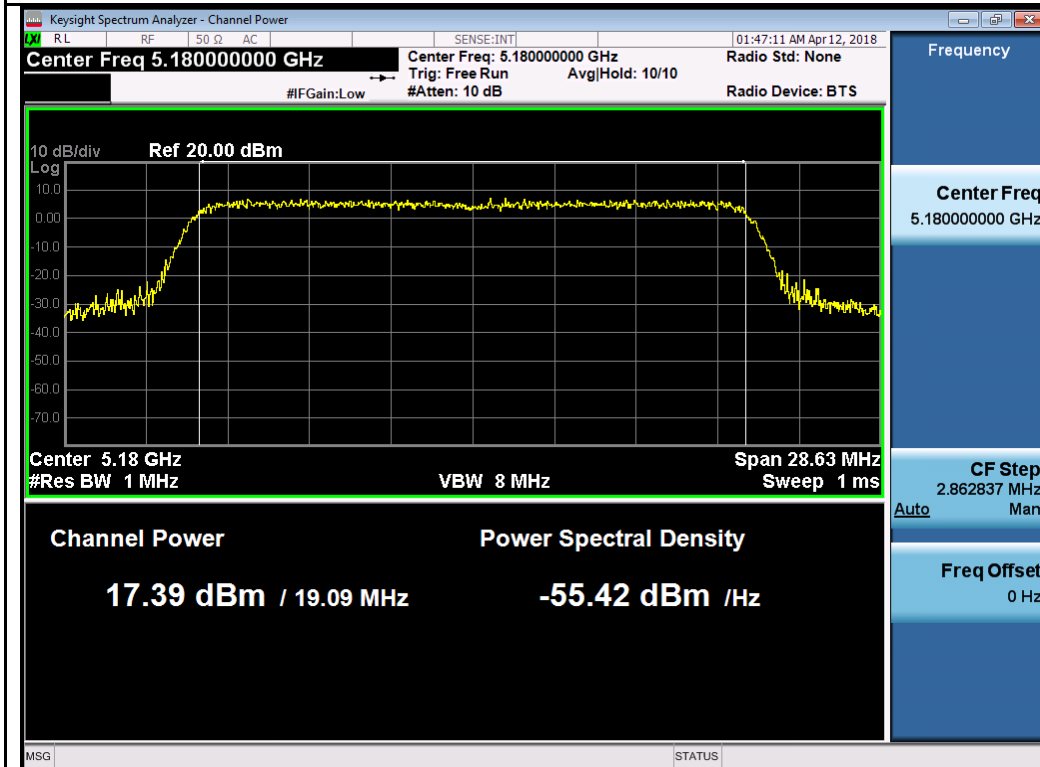


802.11ax20 5180M




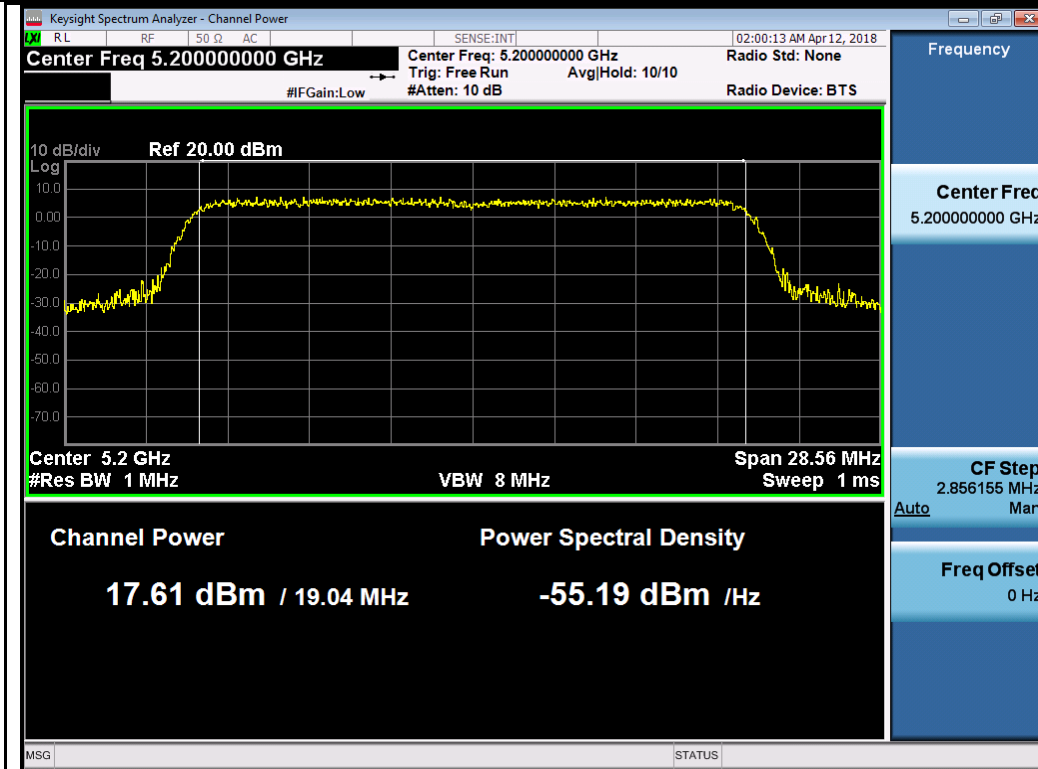


802.11ax20 5200M

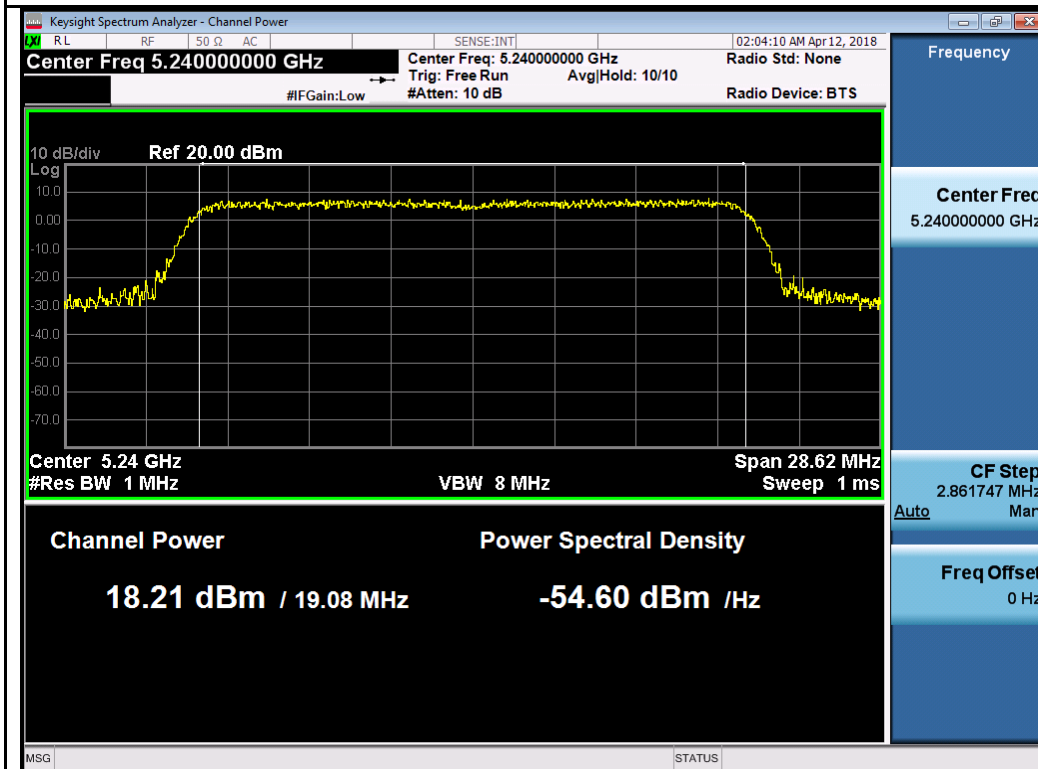


802.11ax20 5240M

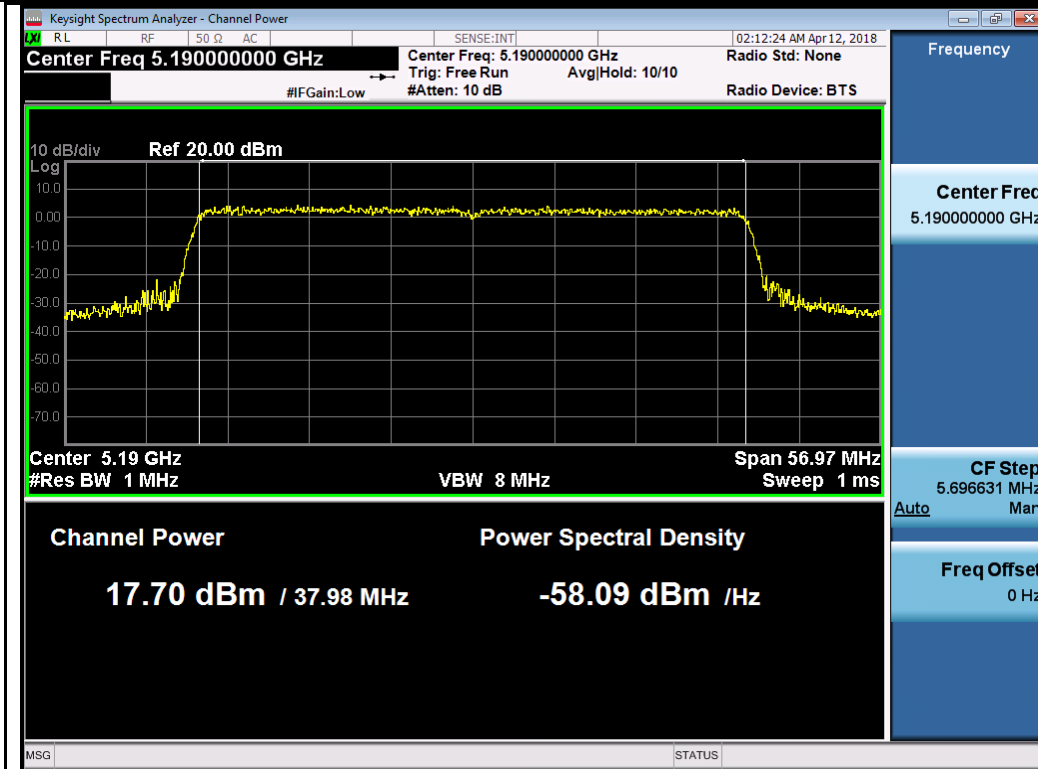


802.11ax40 5190M

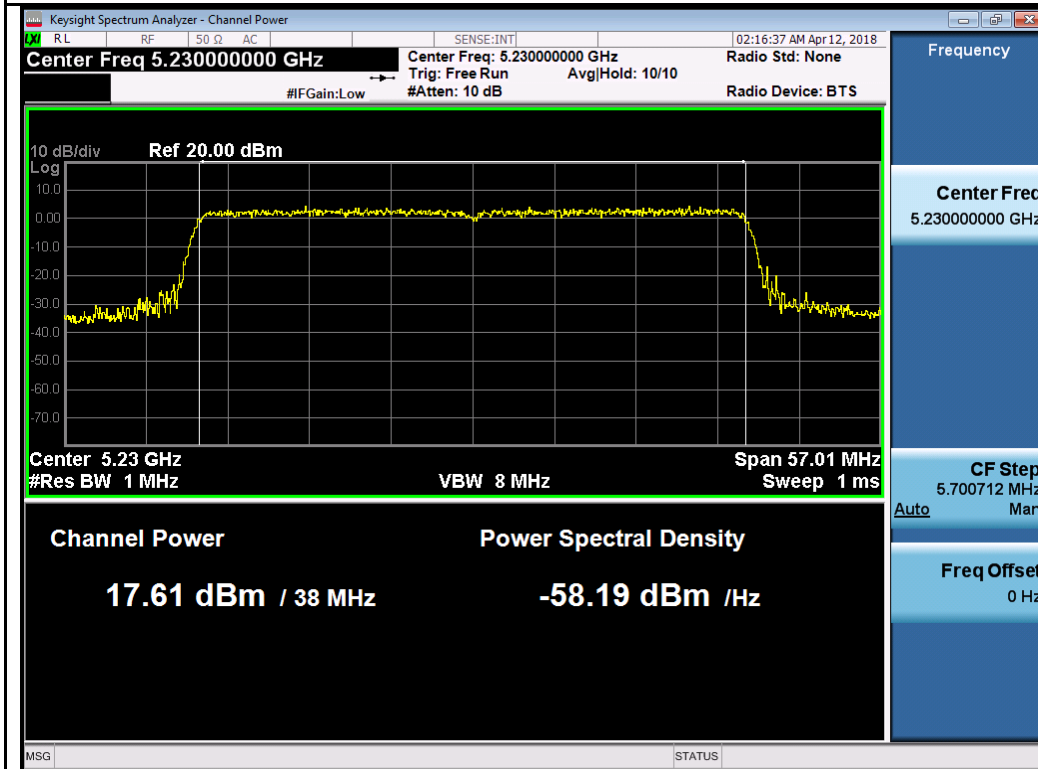


802.11ax40 5230M

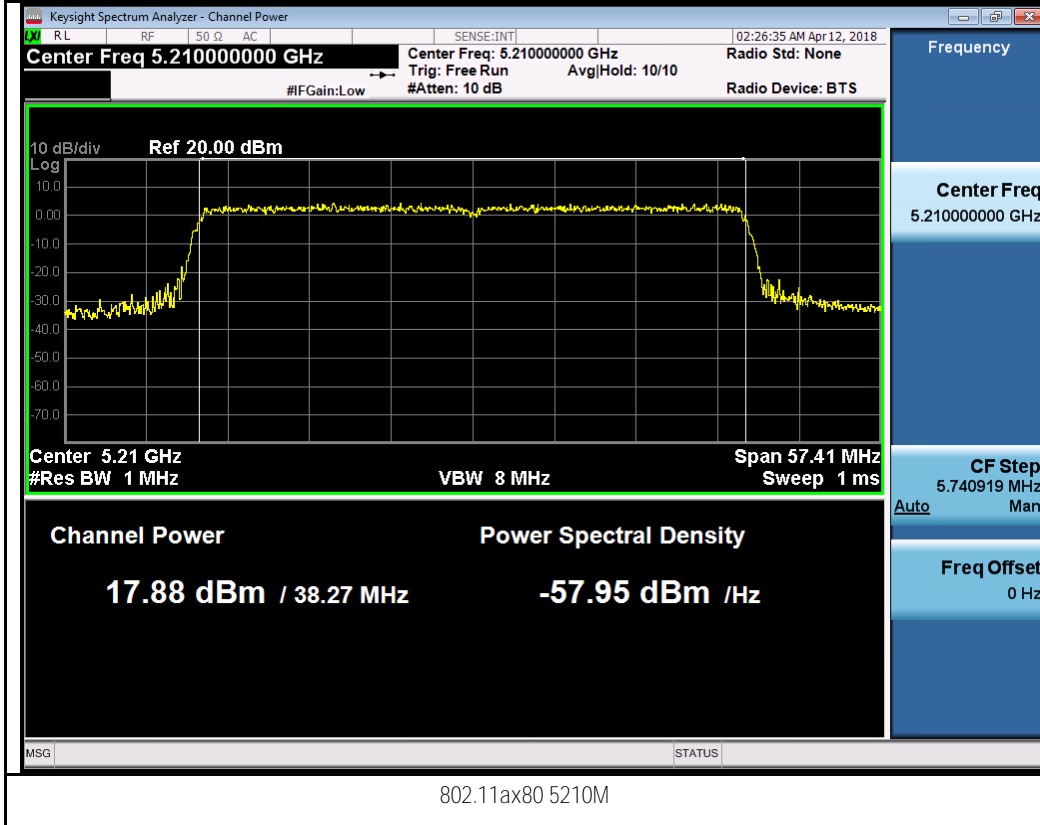

Chain 3:

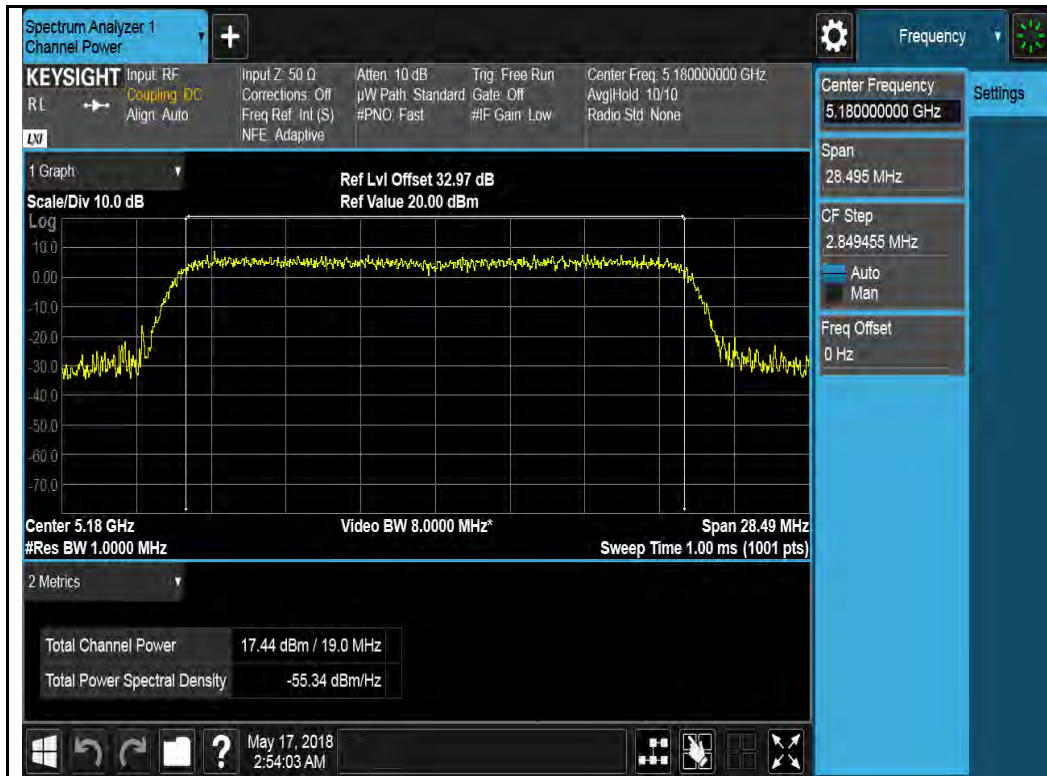


802.11a-5180M

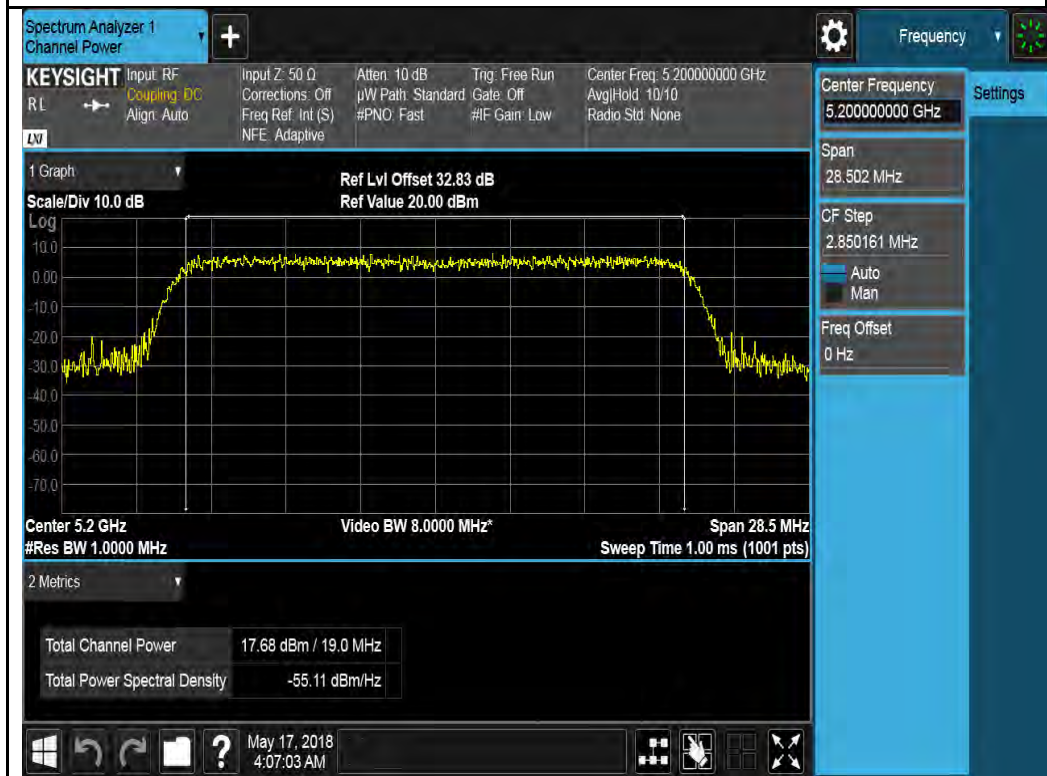


802.11a-5200M




802.11a-5240M

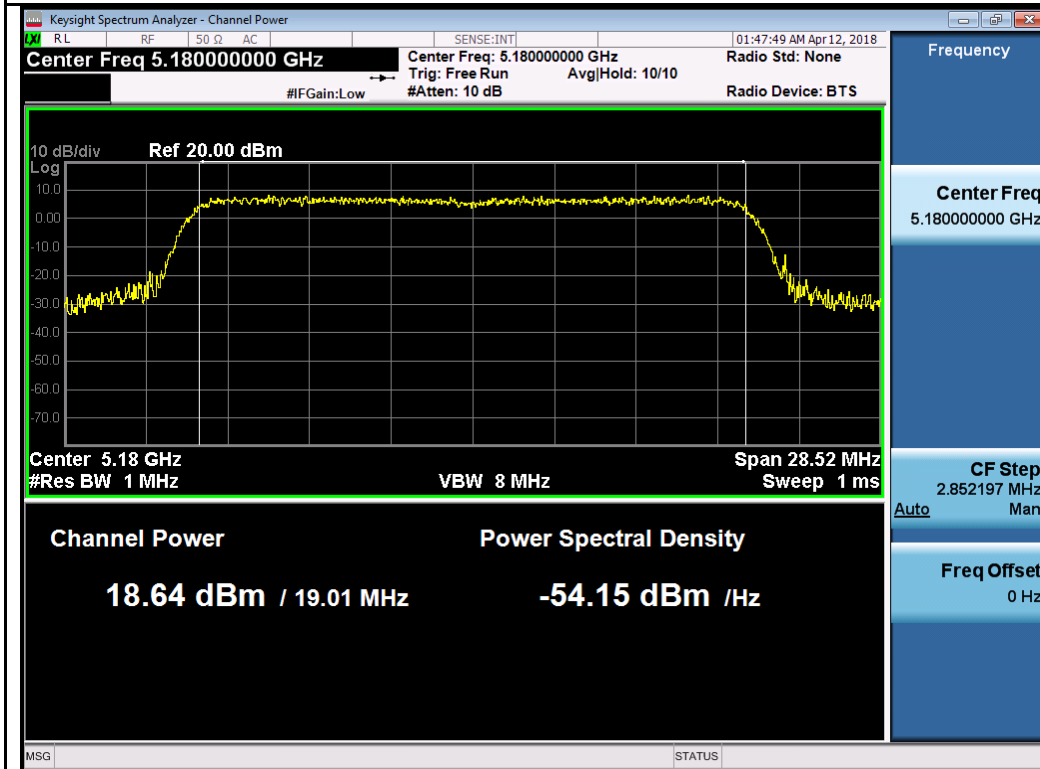


802.11ax20 5180M

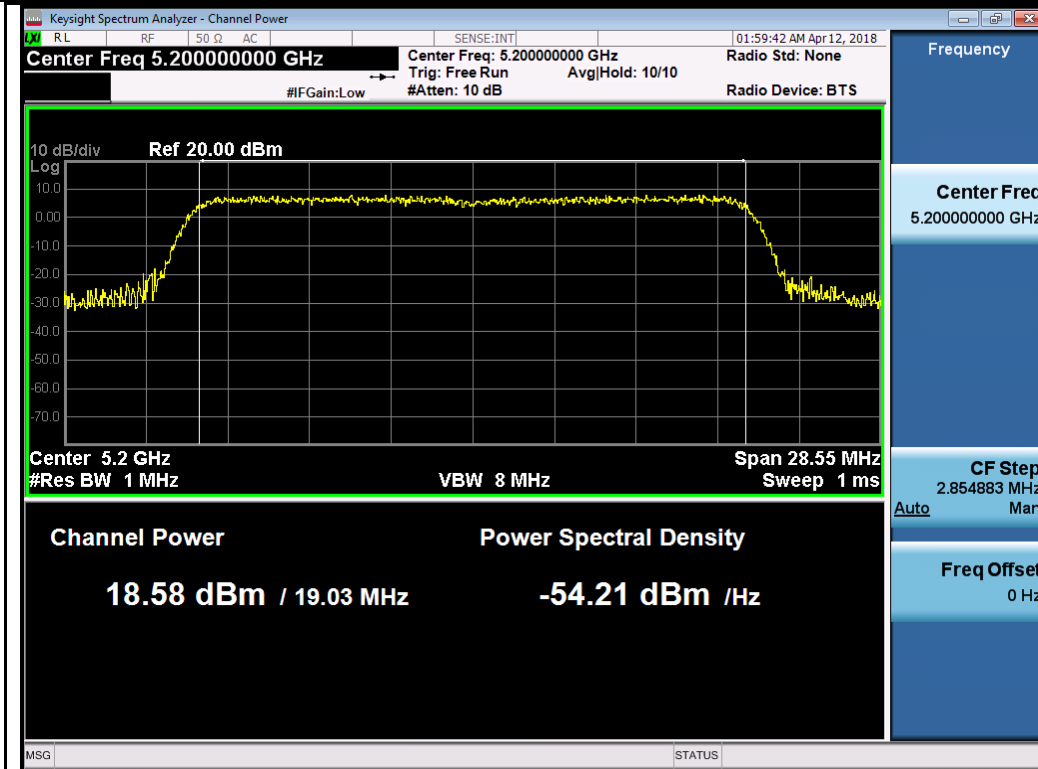


802.11ax20 5200M

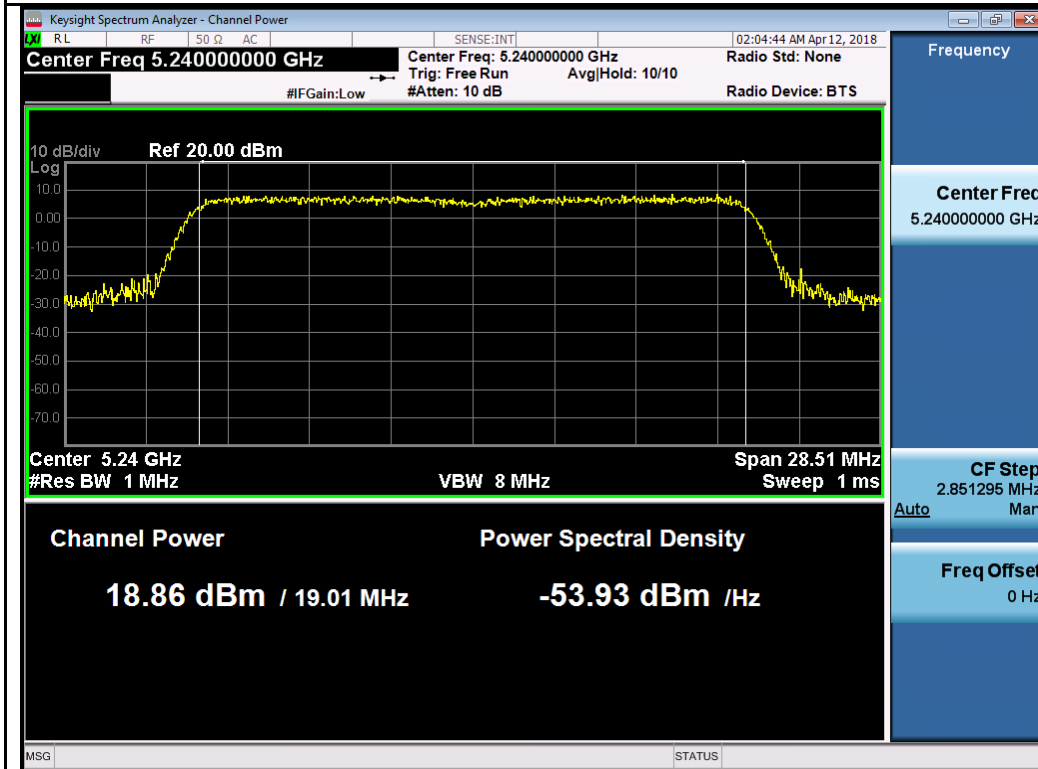


802.11ax20 5240M

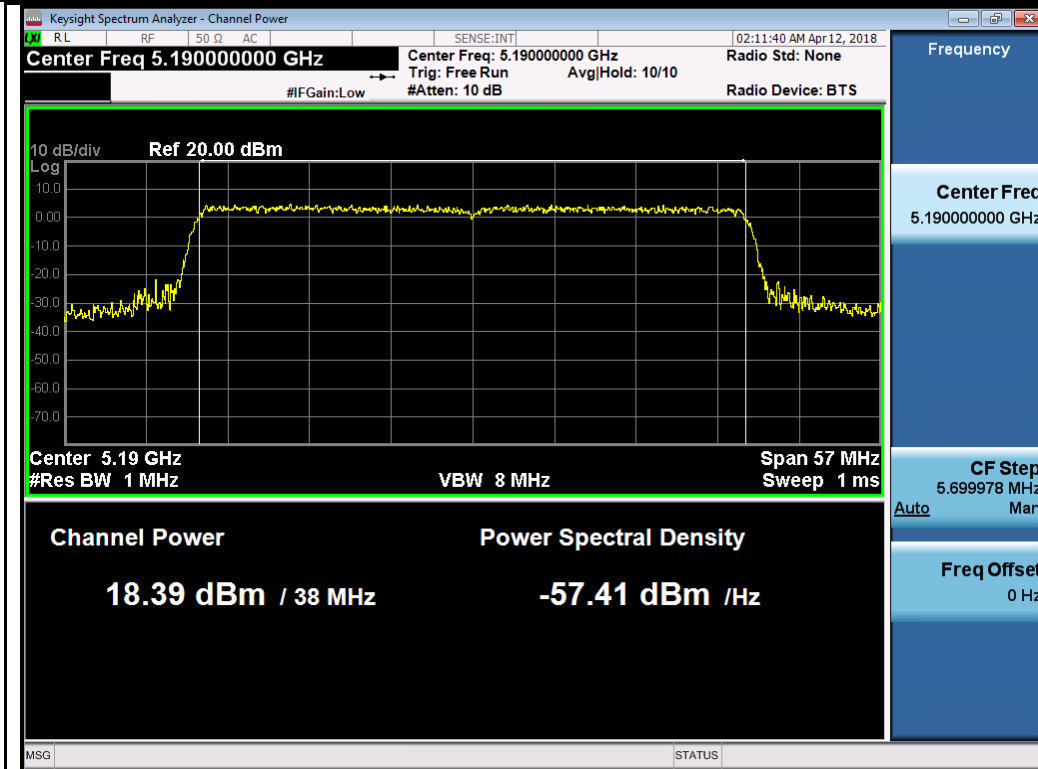

802.11ax40 5190M

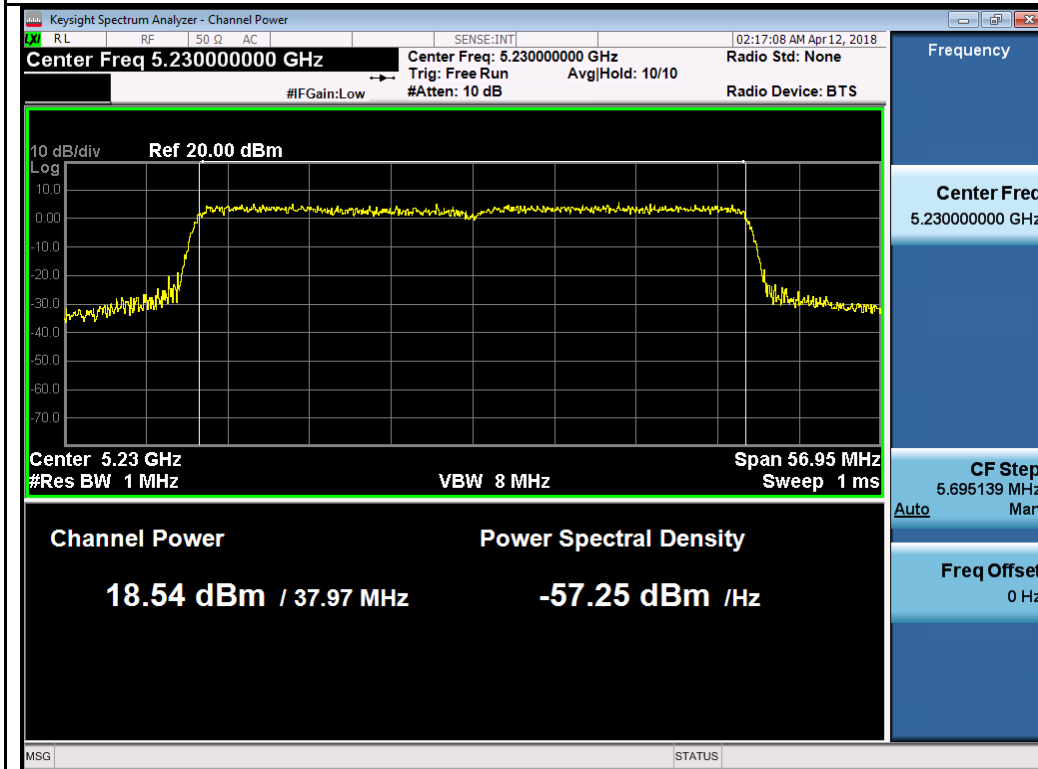


802.11ax40 5230M

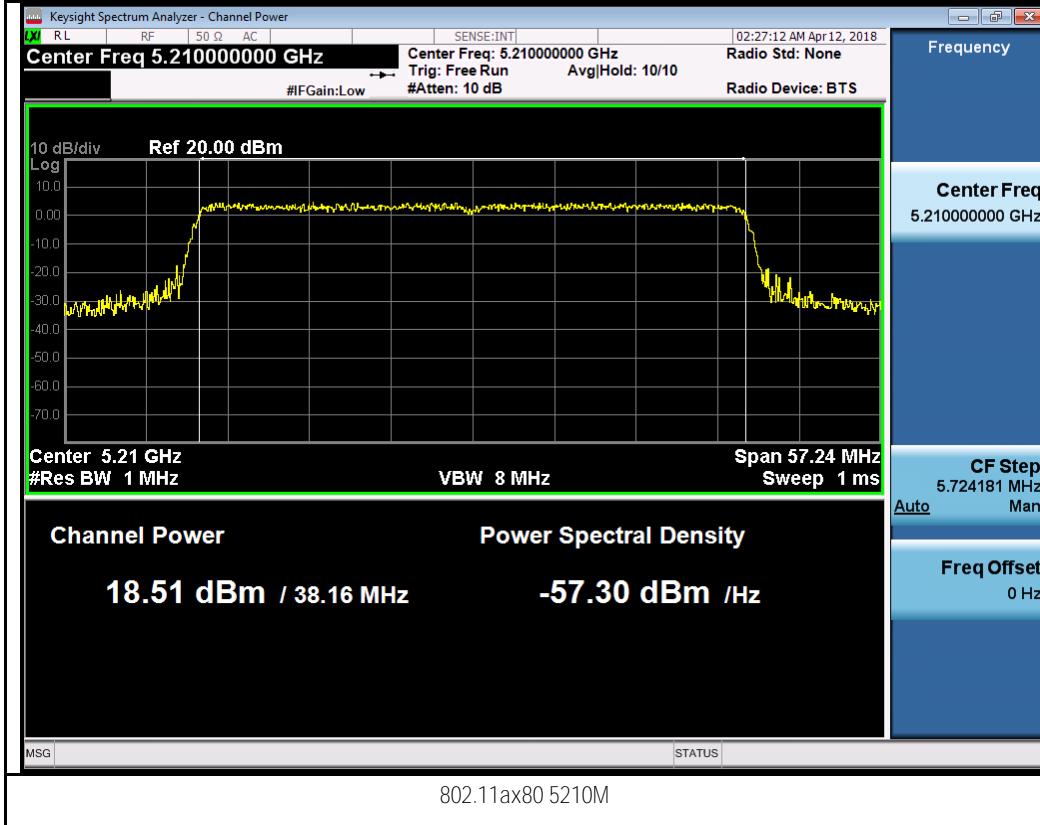




Chain 4:

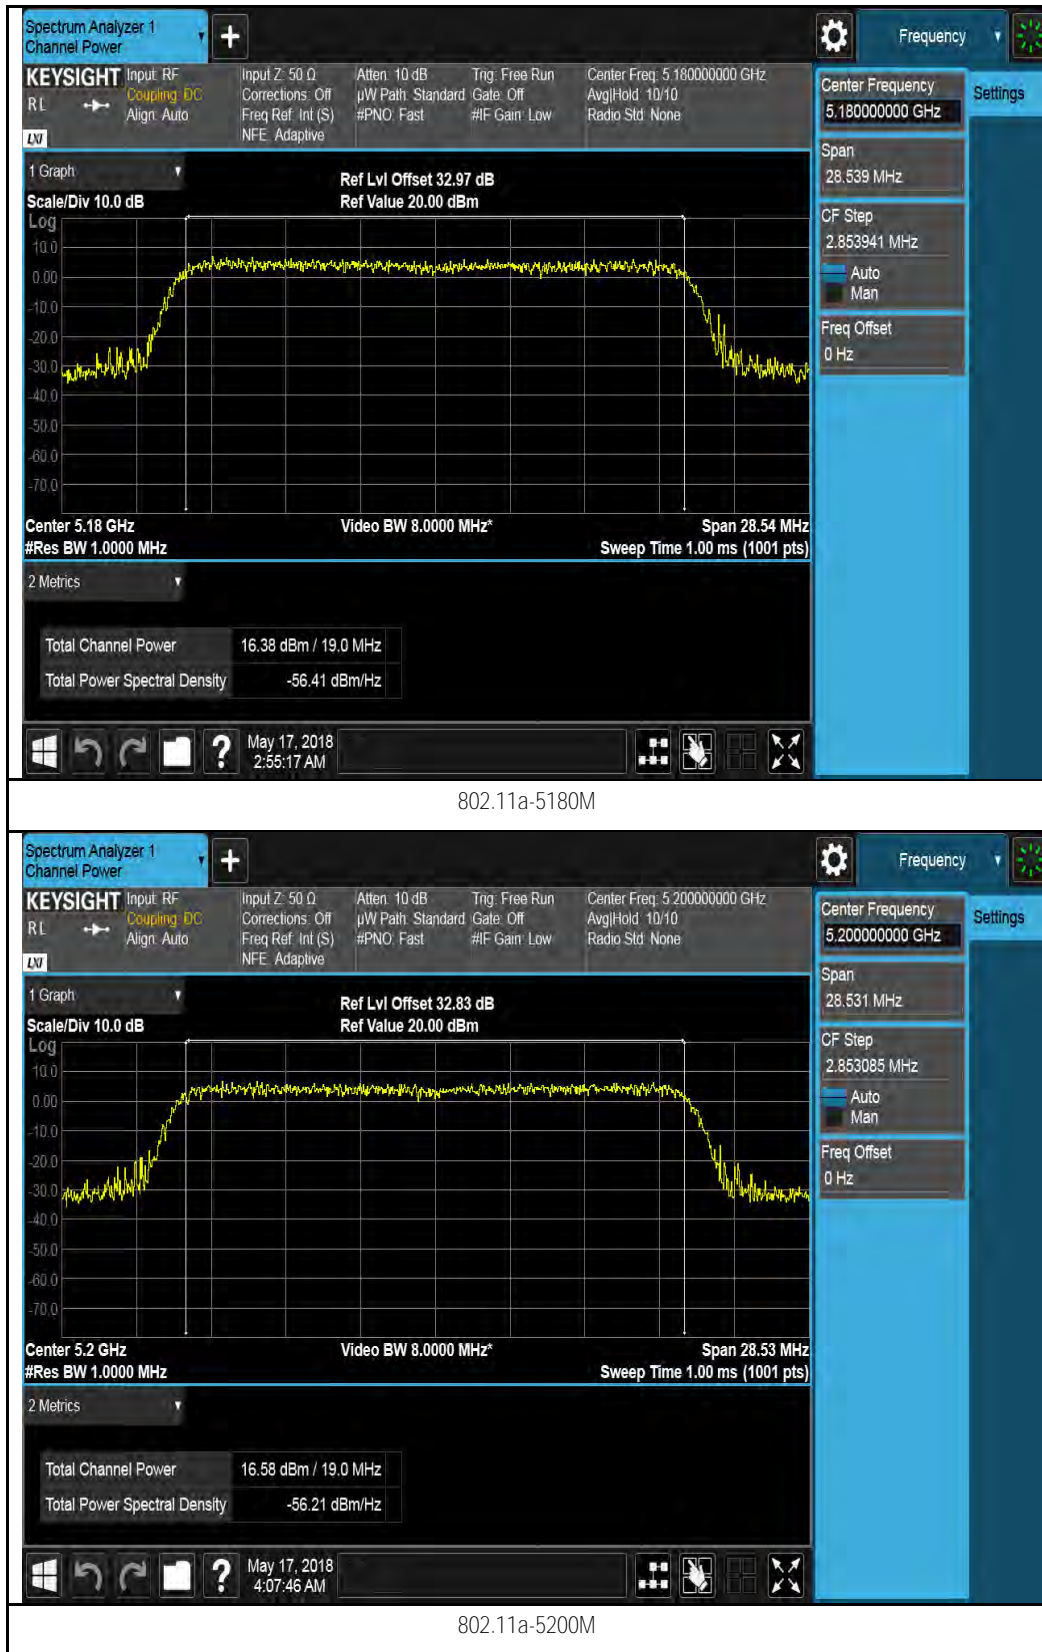





802.11a-5240M

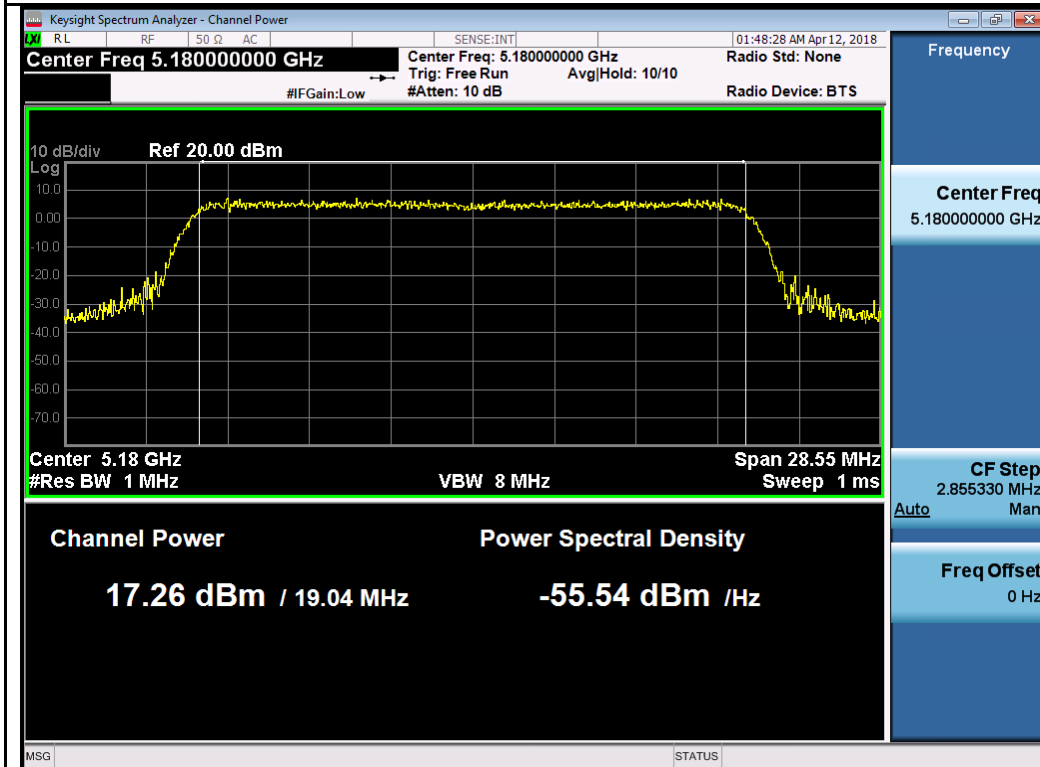


802.11ax20 5180M

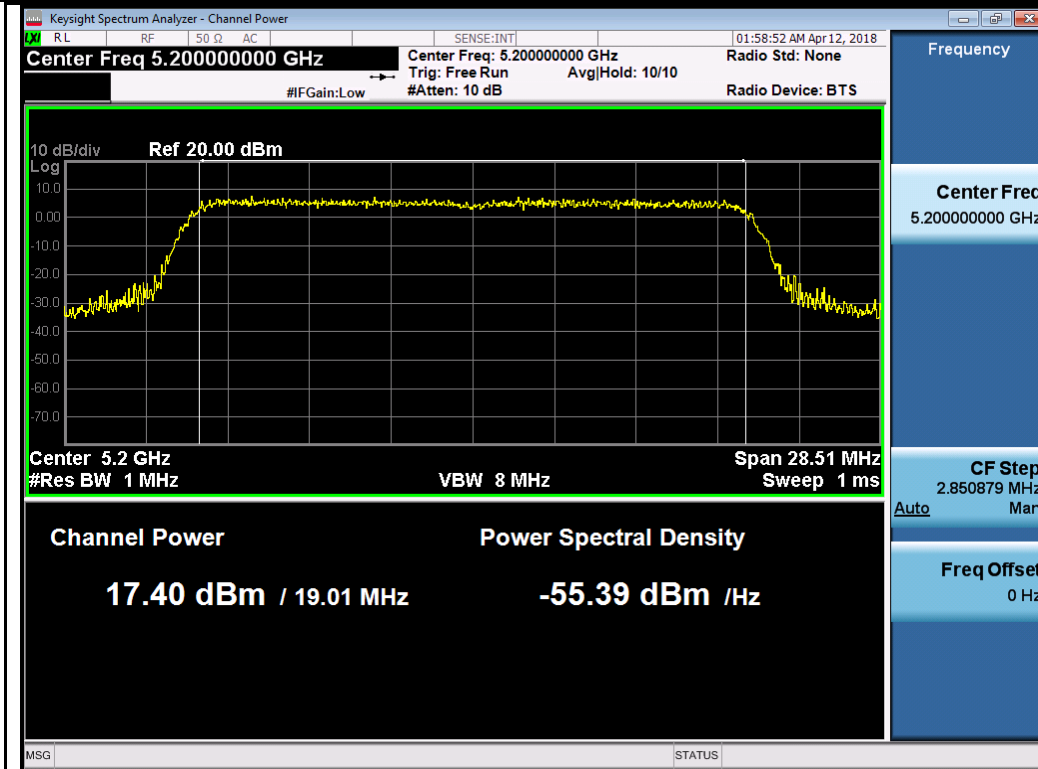


802.11ax20 5200M

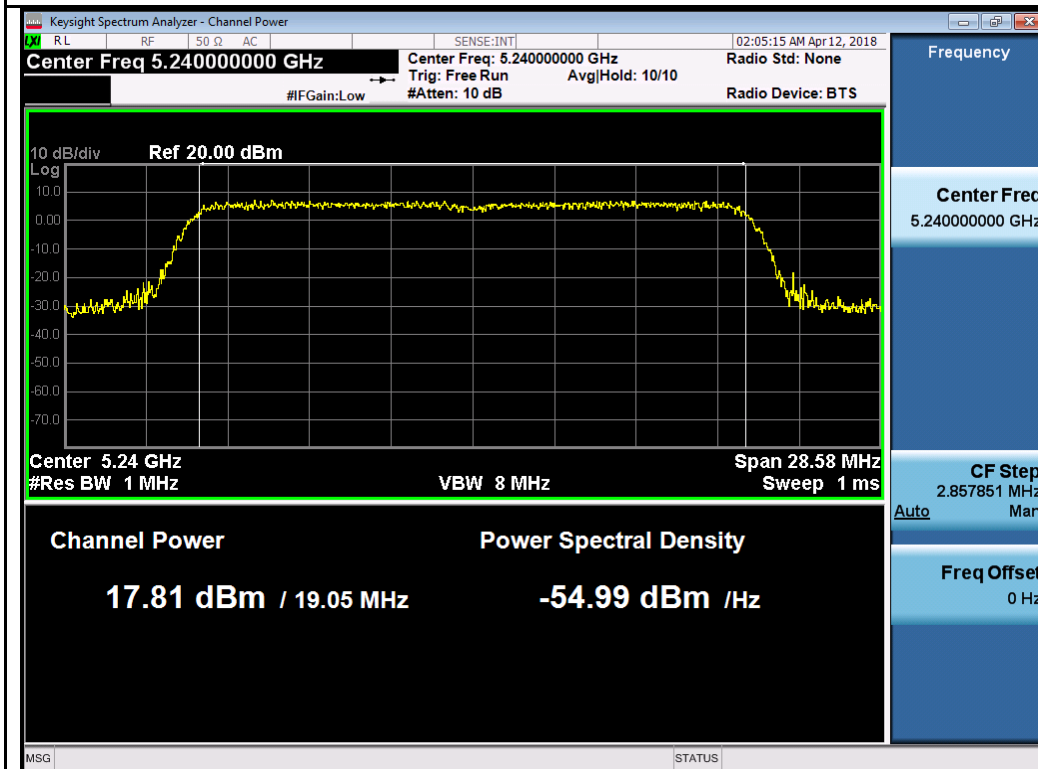


802.11ax20 5240M

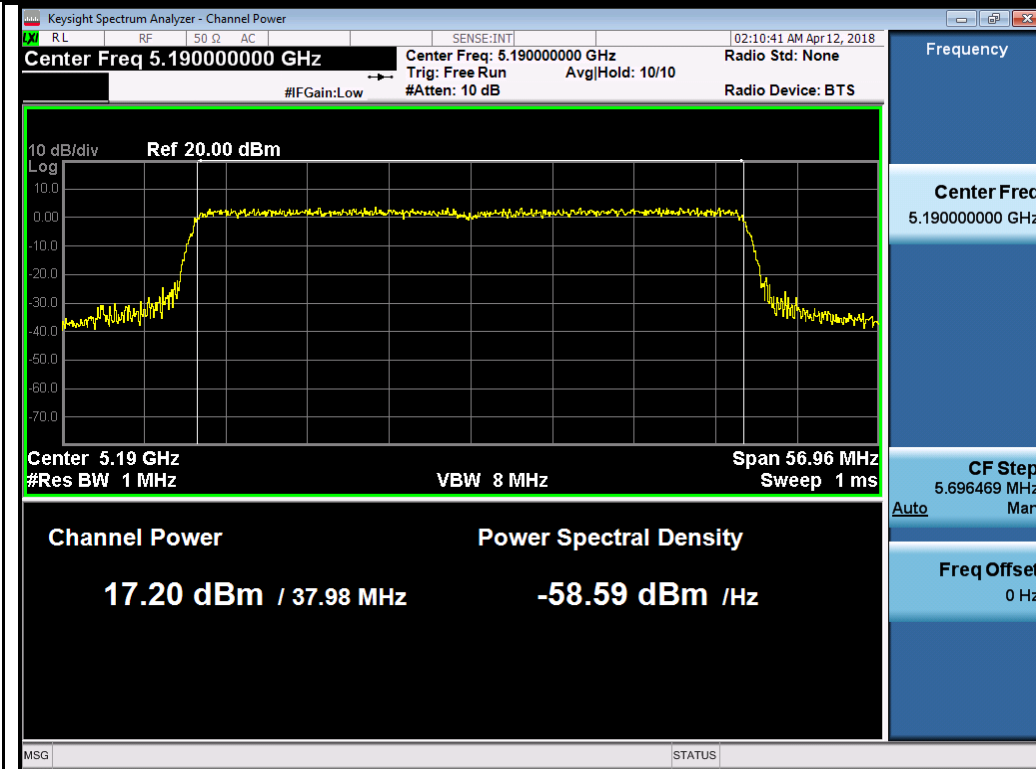

802.11ax40 5190M

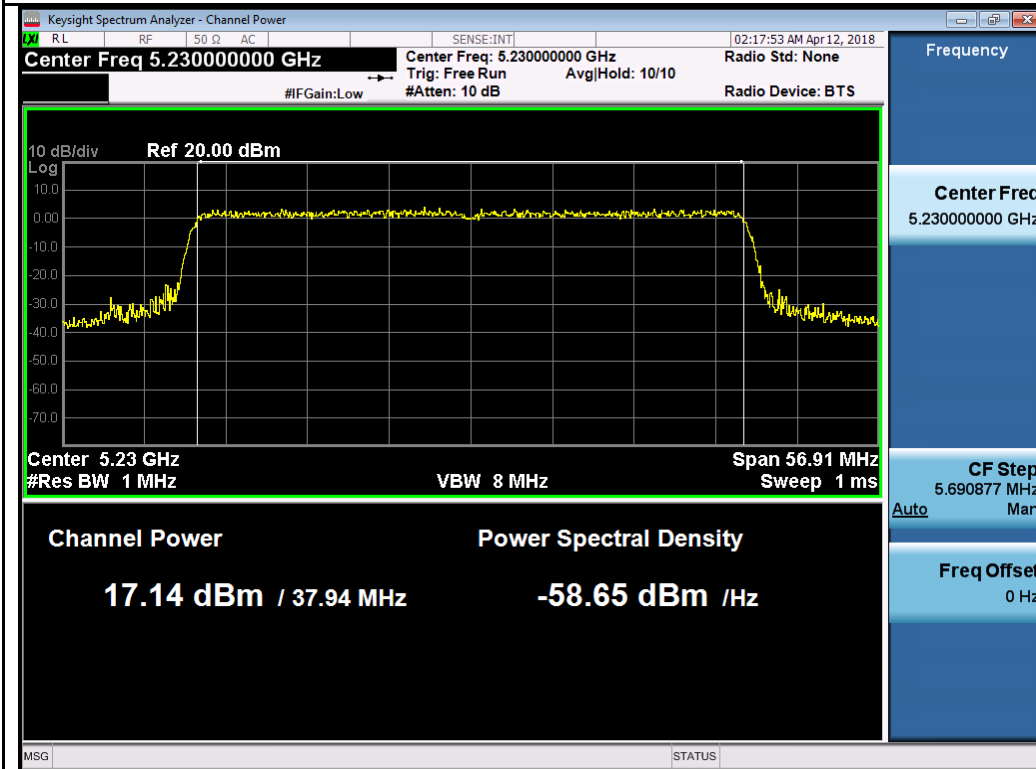

802.11ax40 5230M

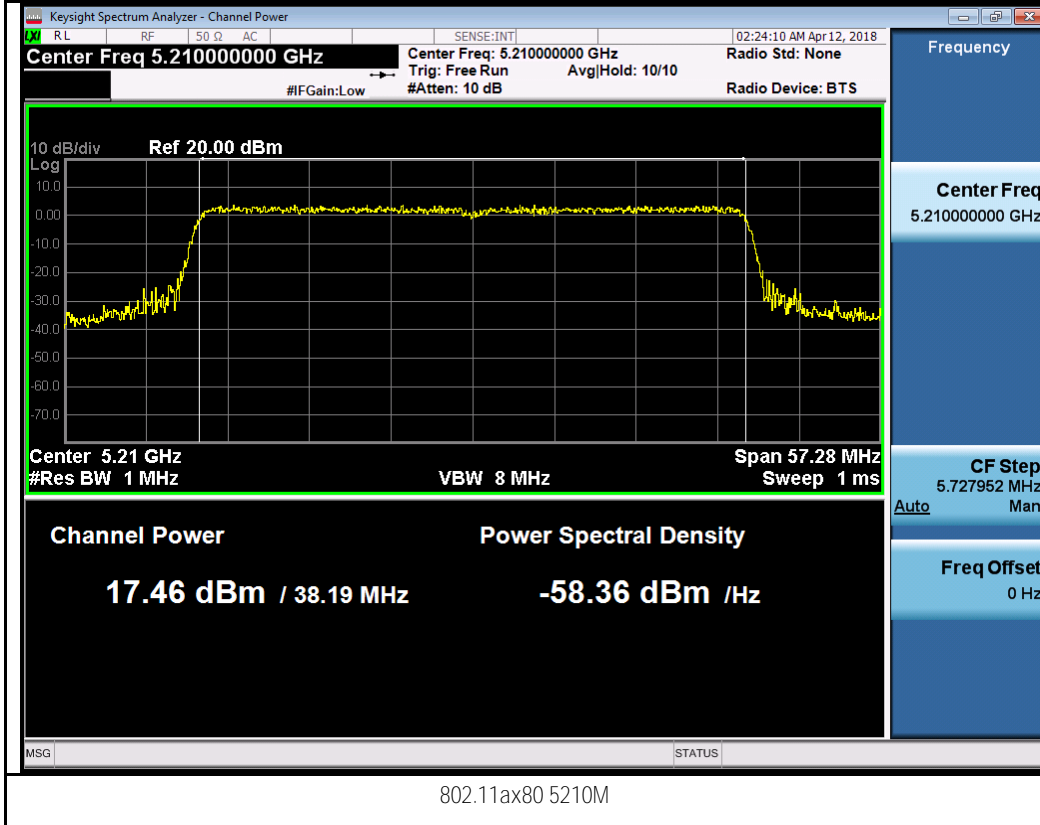


Chain 5:




802.11a-5180M




802.11a-5200M

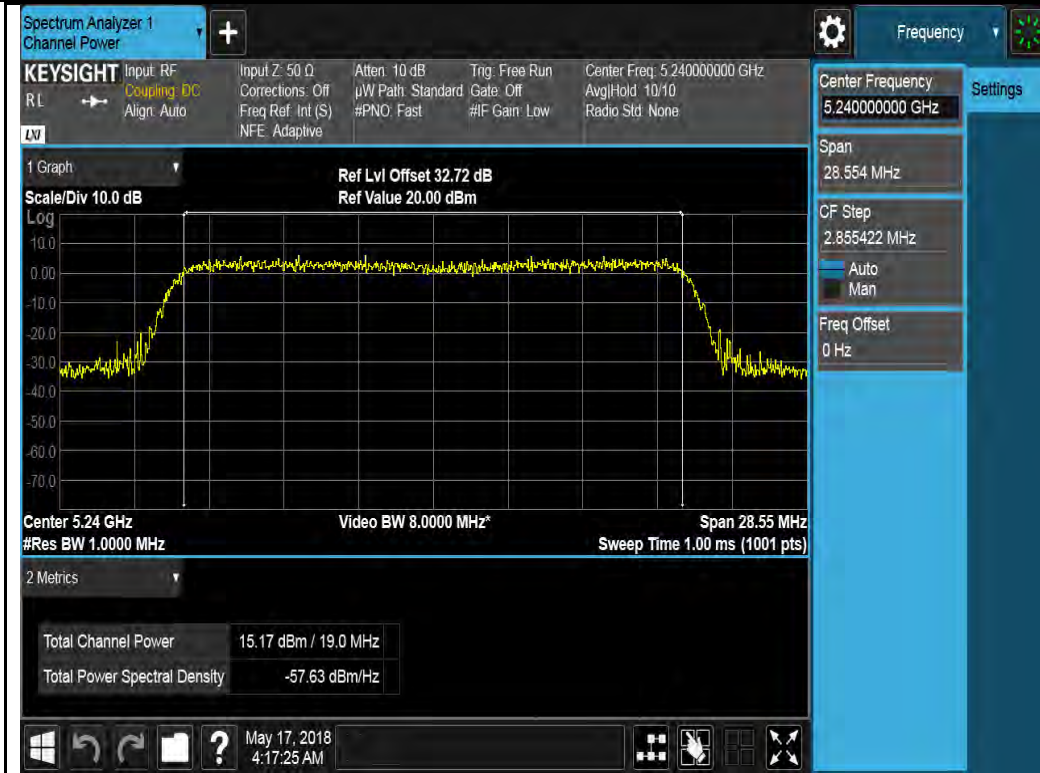


802.11a-5240M

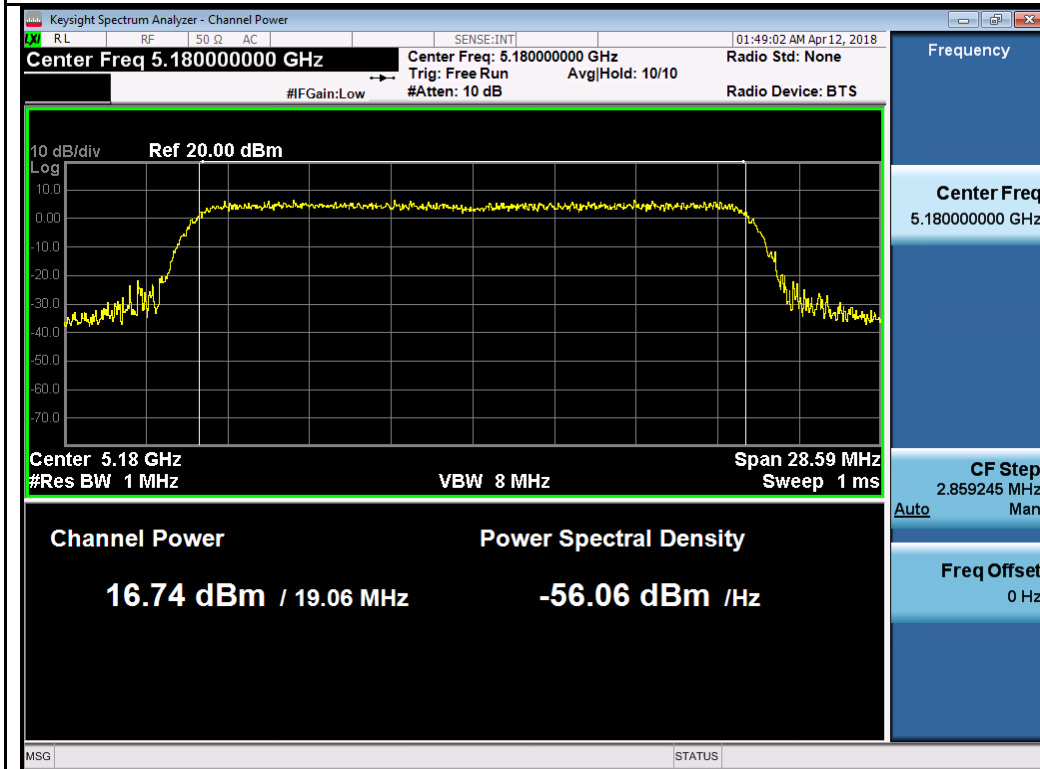

802.11ax20 5180M

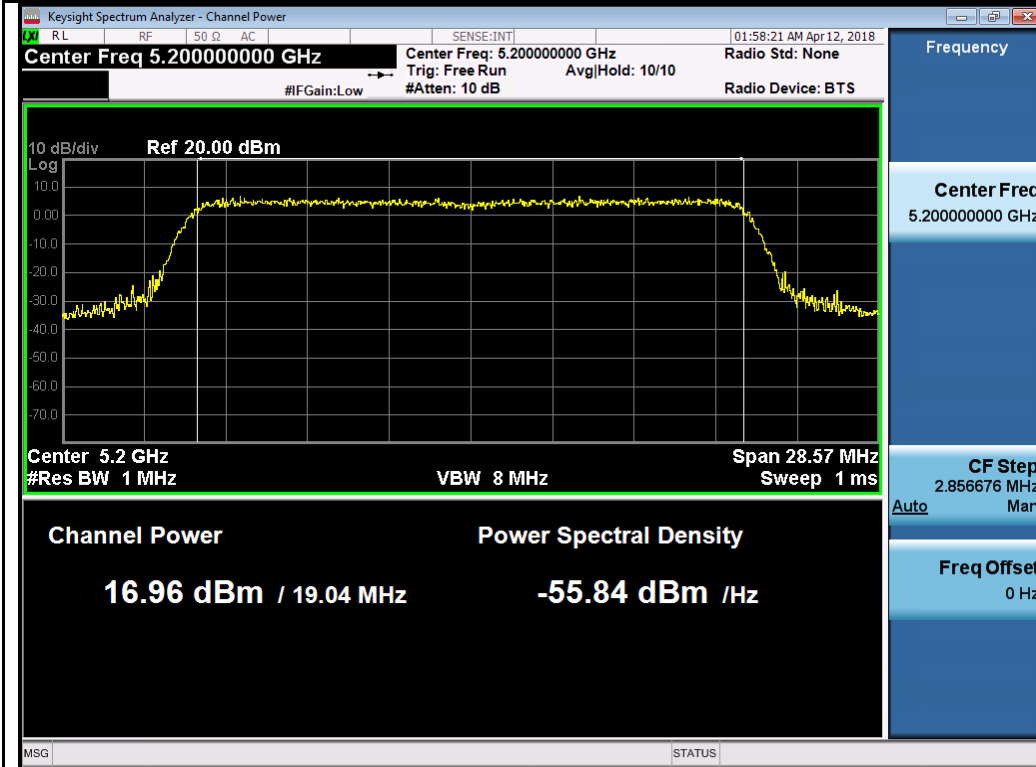


802.11ax20 5200M

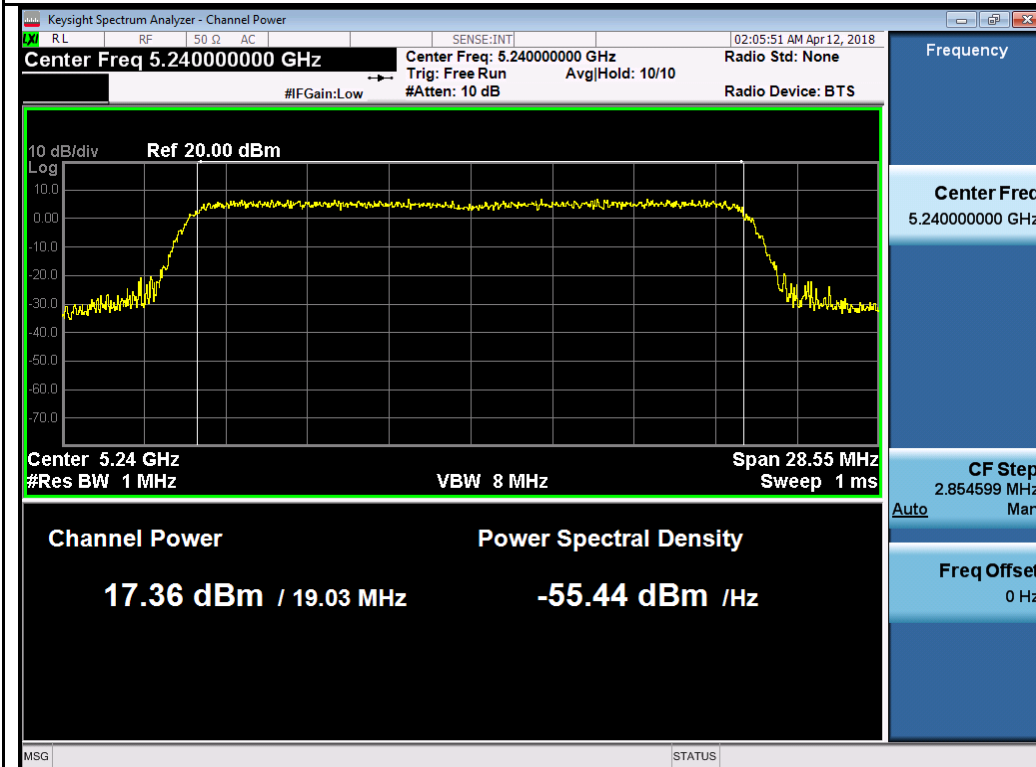


802.11ax20 5240M




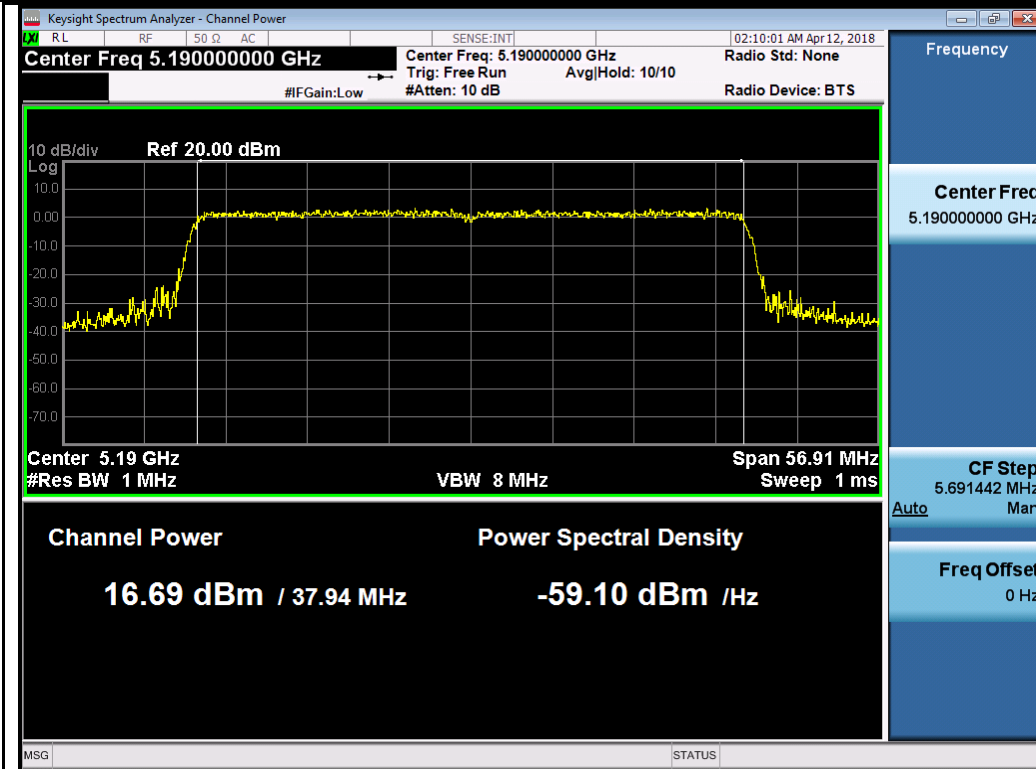

802.11ax40 5190M

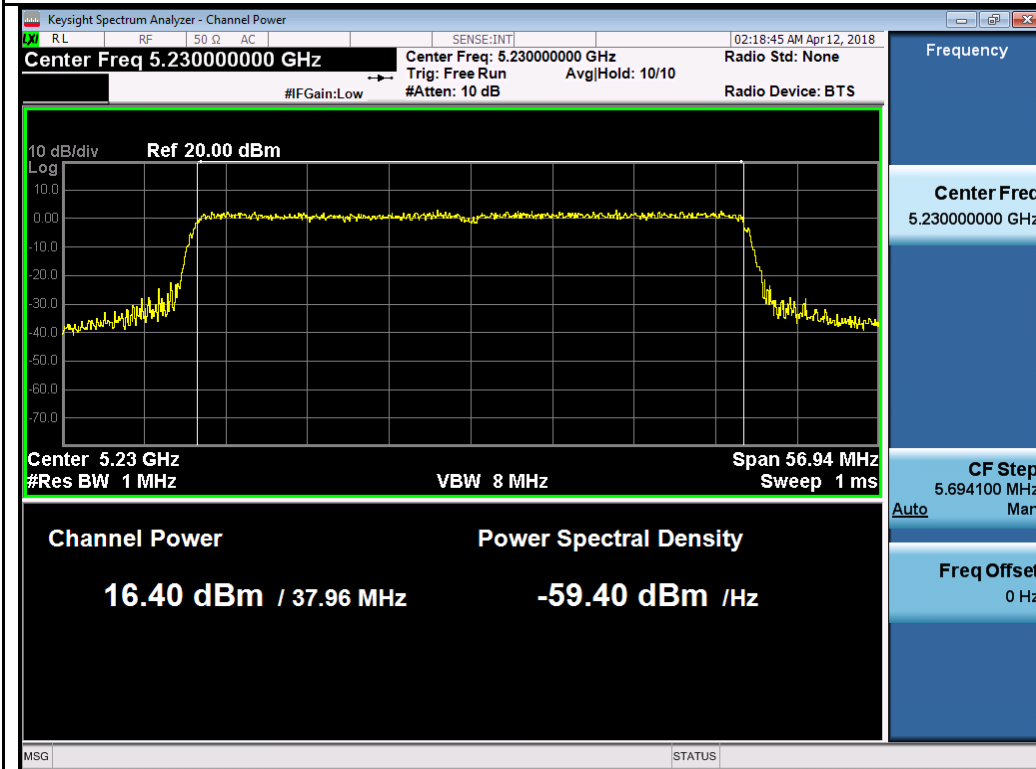


802.11ax40 5230M

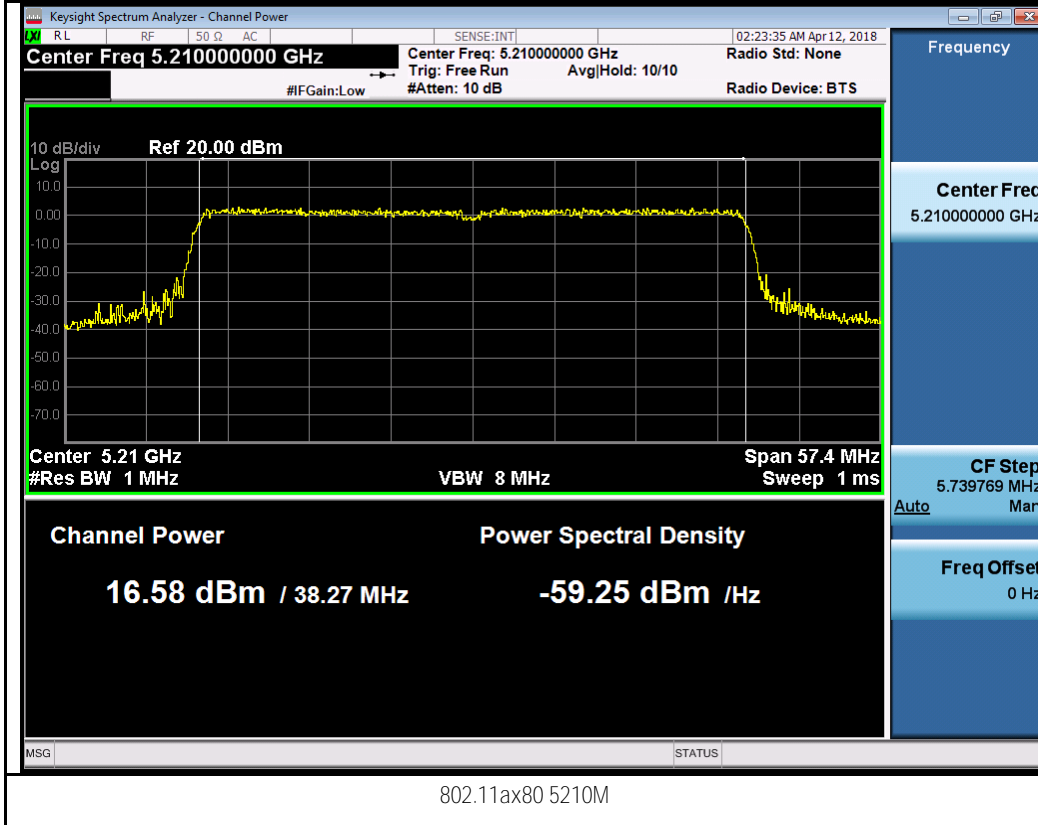

Chain 6:




802.11a-5180M

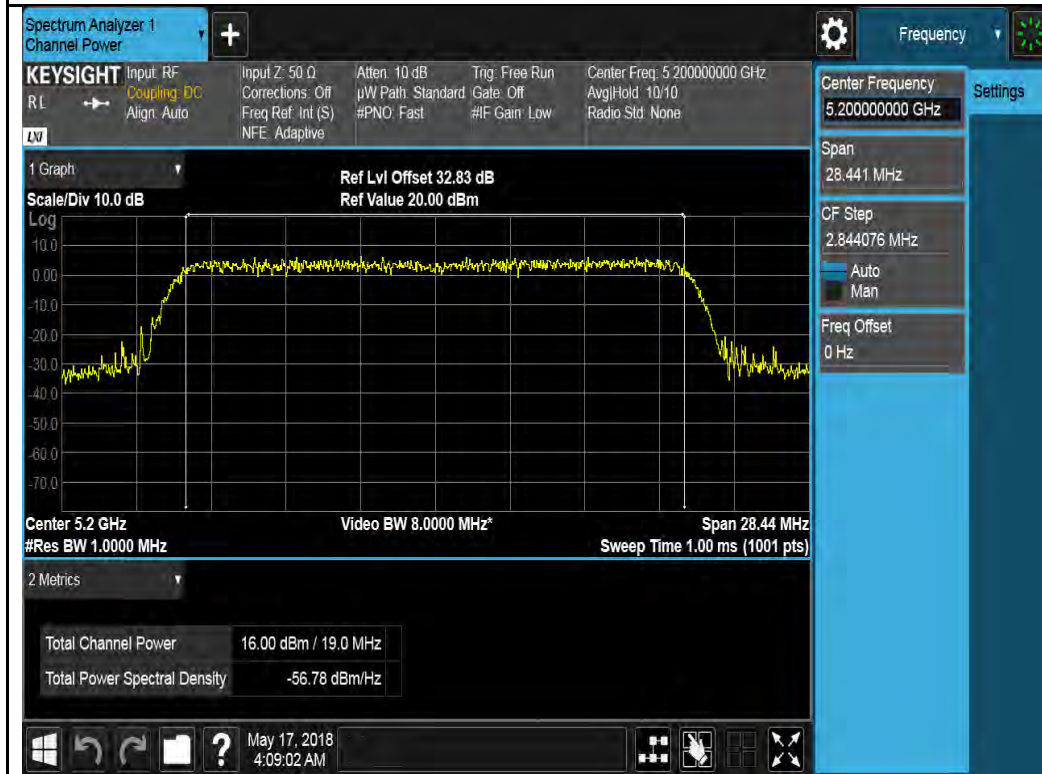


802.11a-5200M




802.11a-5240M

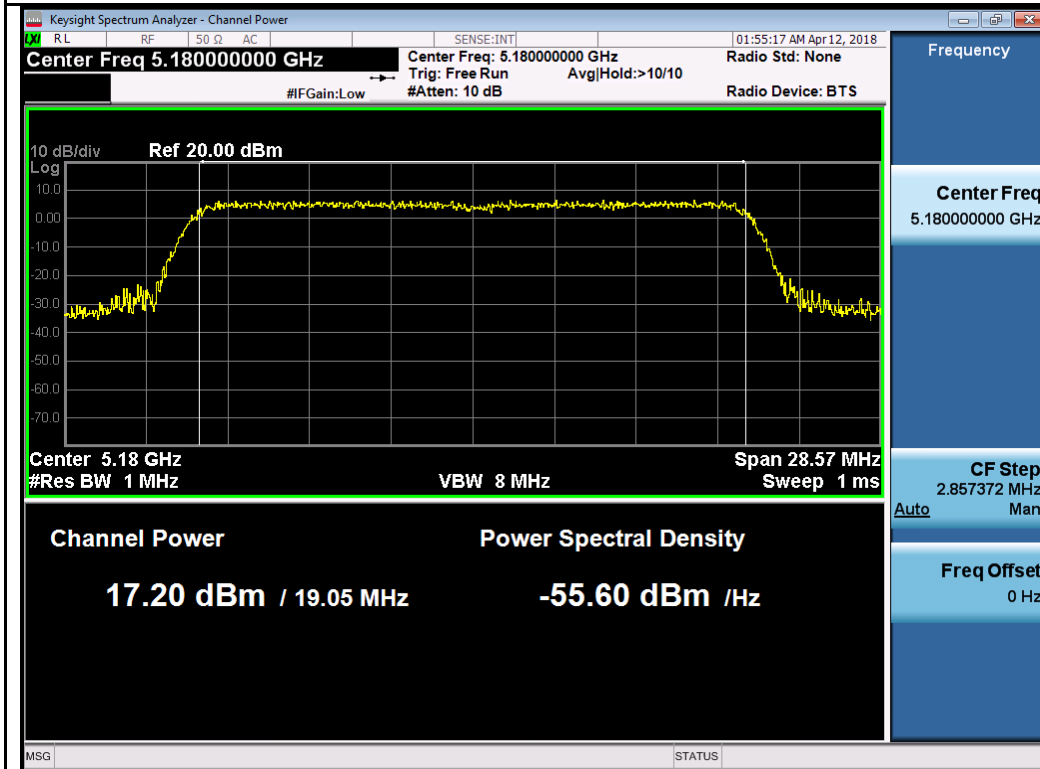


802.11ax20 5180M

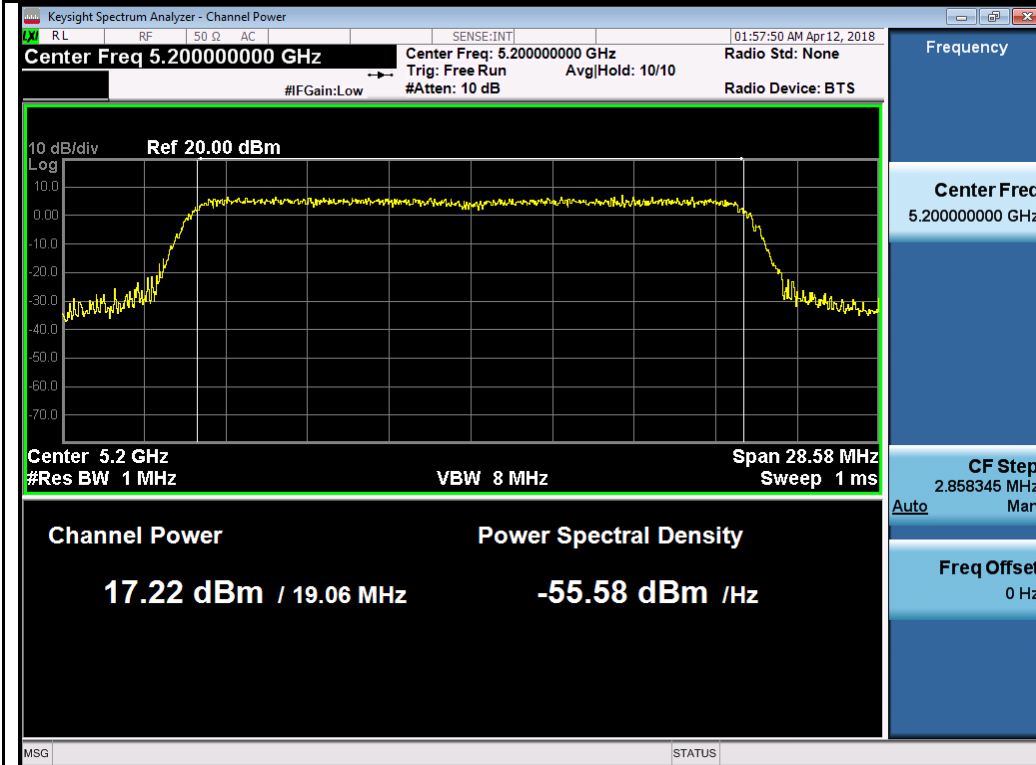


802.11ax20 5200M

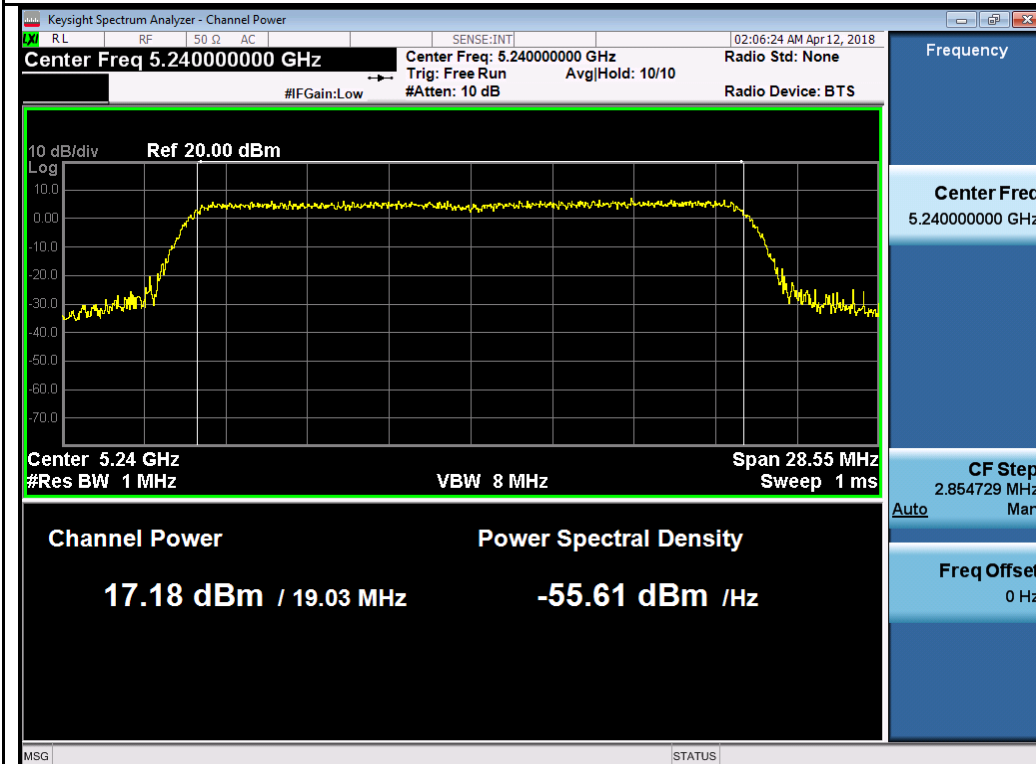


802.11ax20 5240M

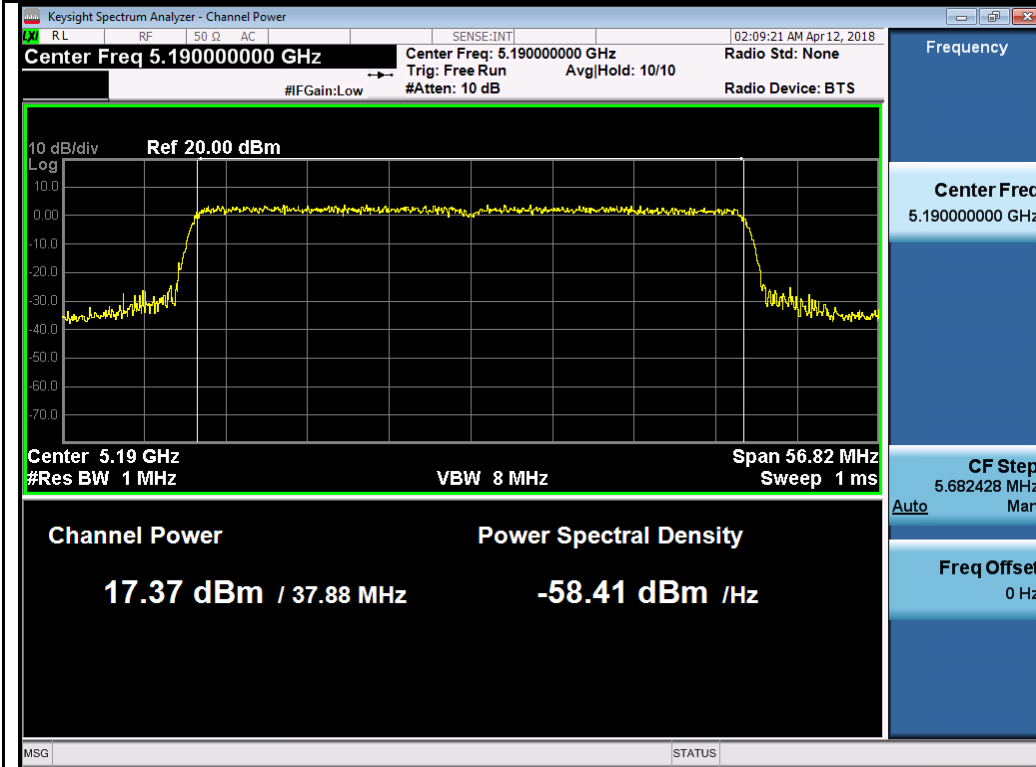


802.11ax40 5190M

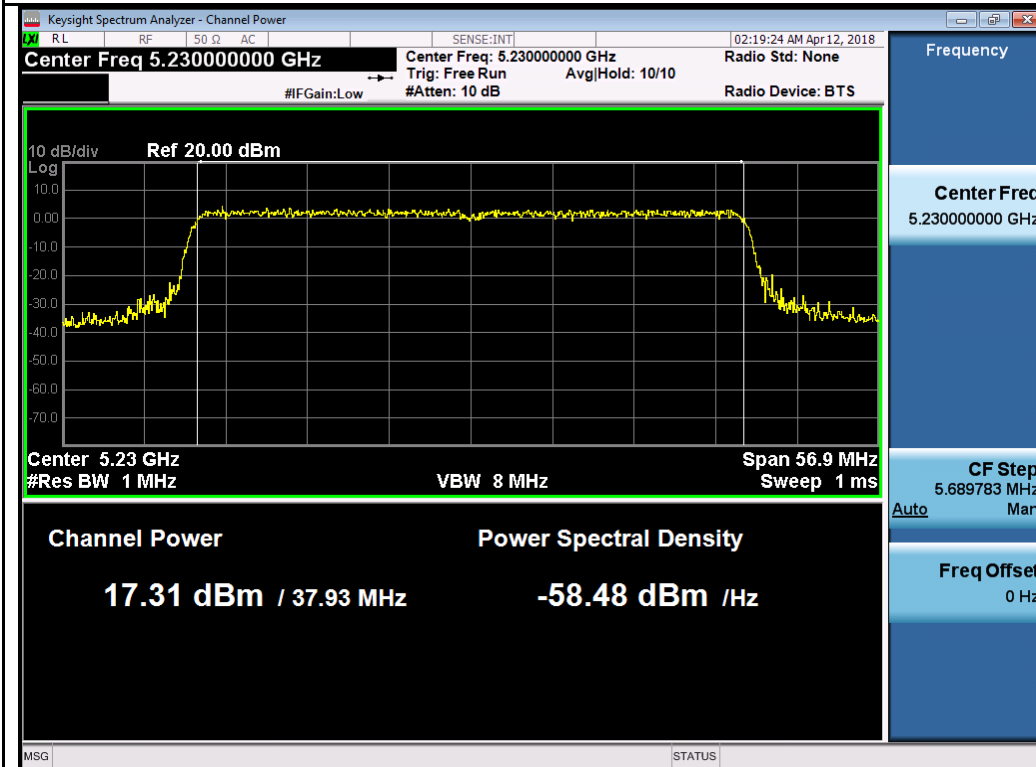


802.11ax40 5230M

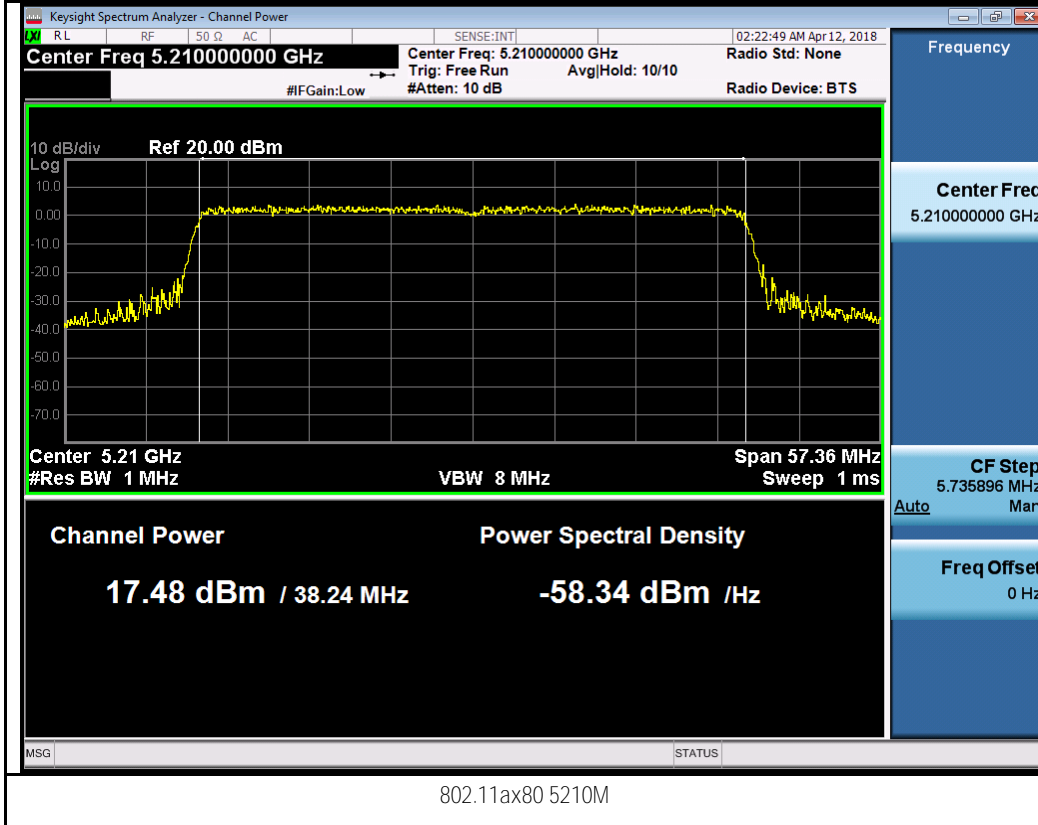

Chain 7:

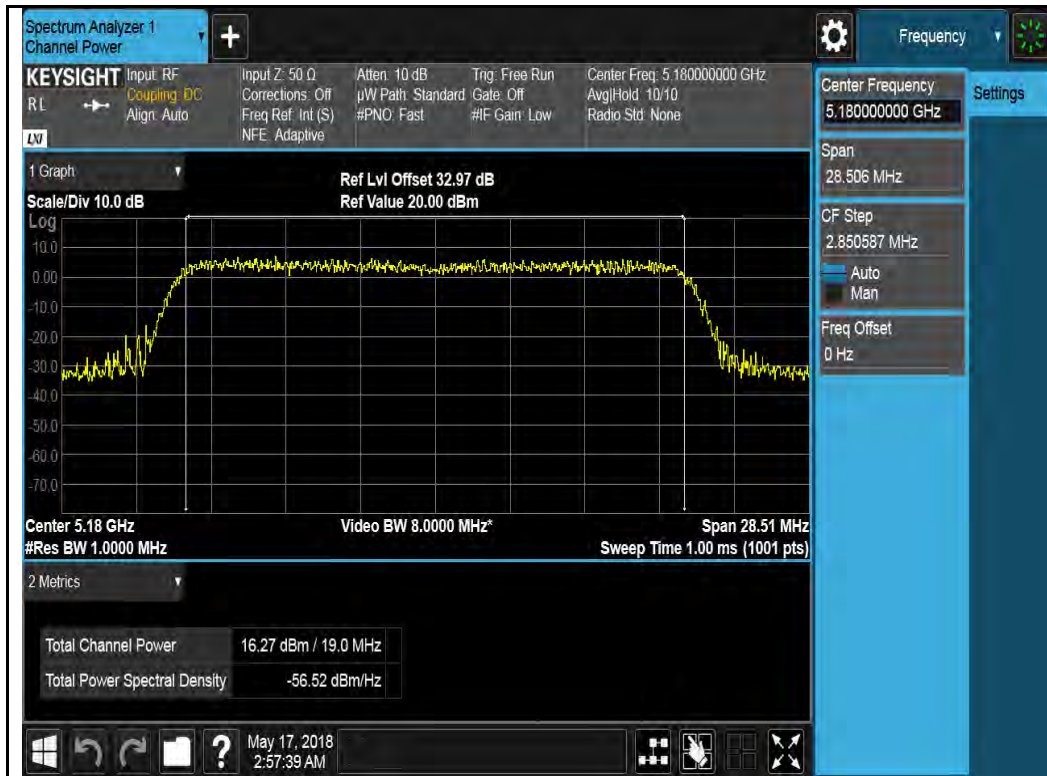

802.11a-5180M

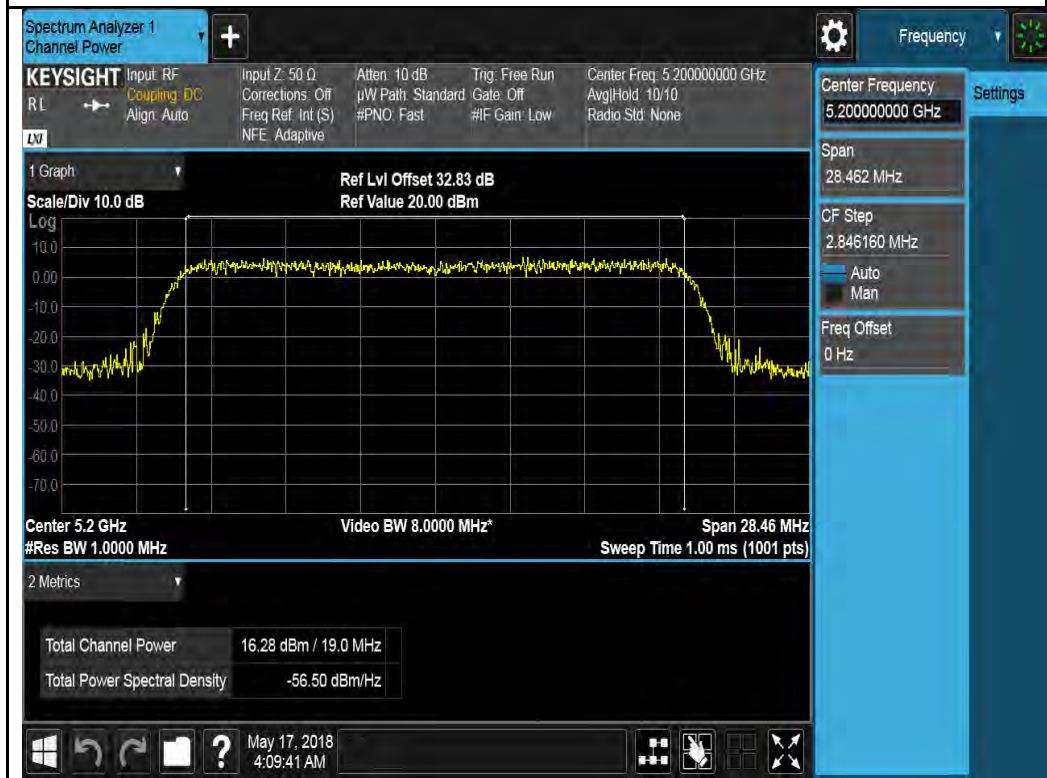


802.11a-5200M







802.11a-5240M

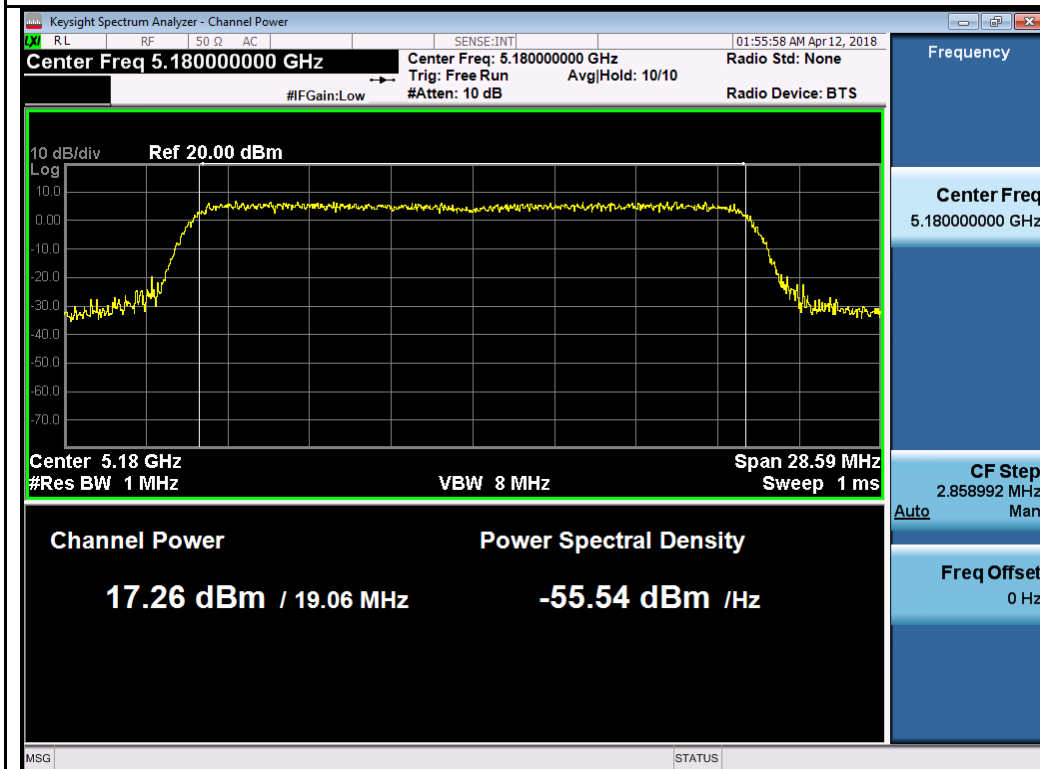


802.11ax20 5180M

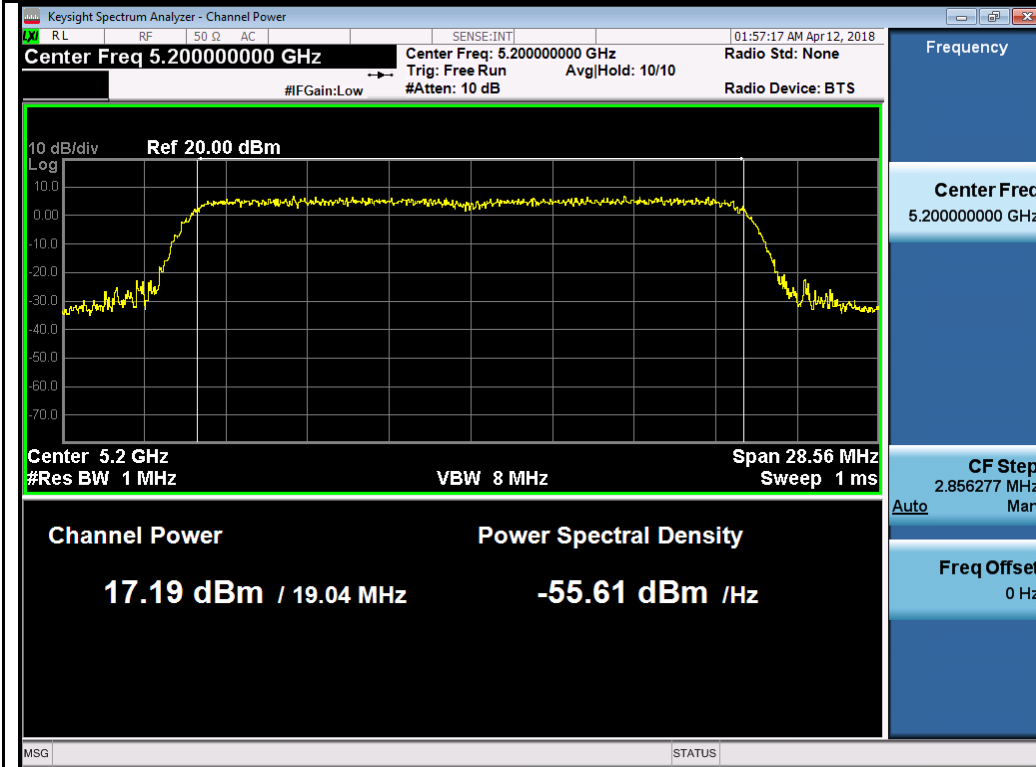


802.11ax20 5200M

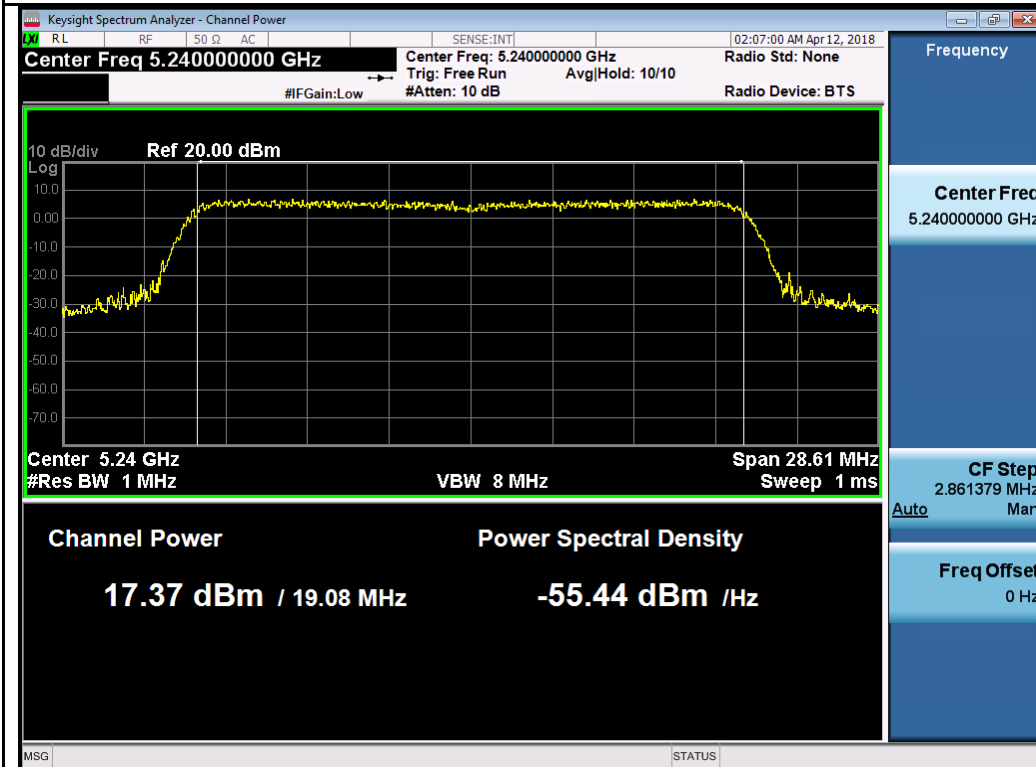


802.11ax20 5240M

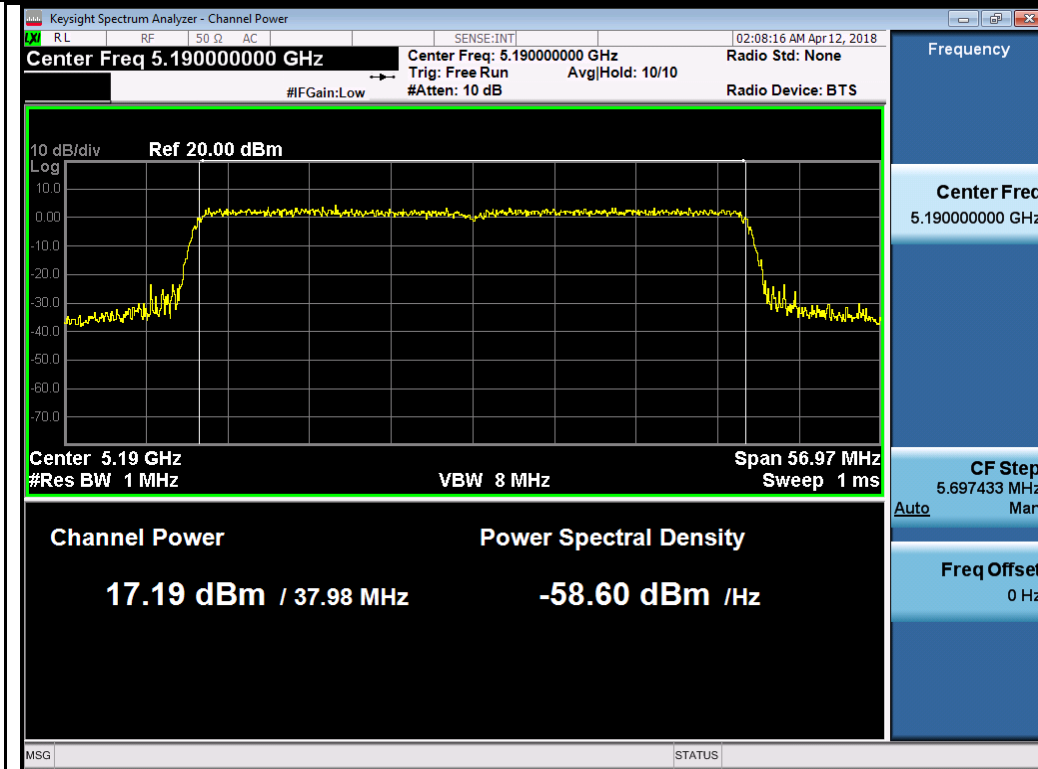

802.11ax40 5190M

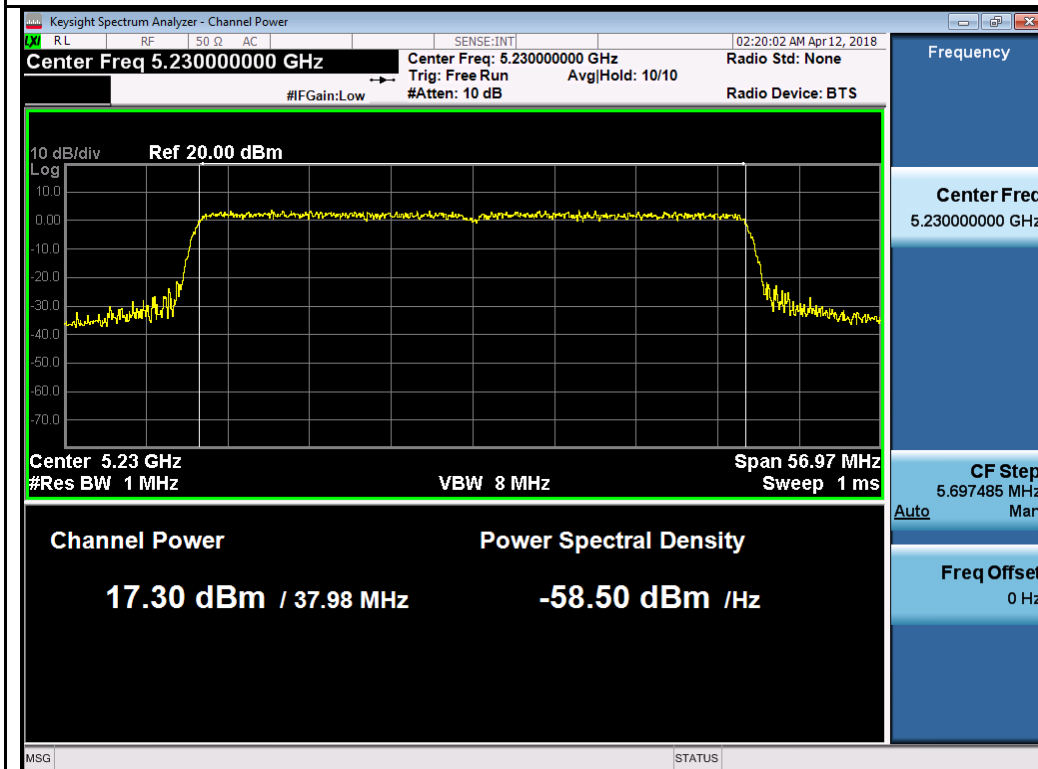


802.11ax40 5230M

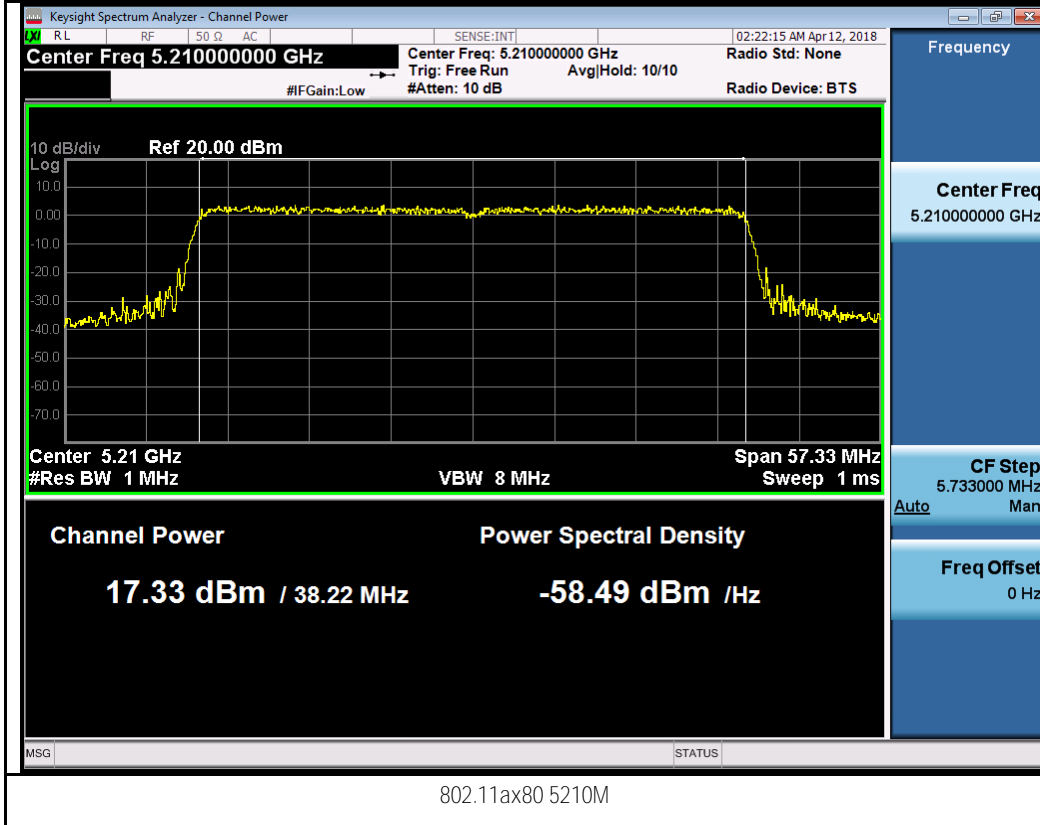


Test Plot for W58:

Chain 0:

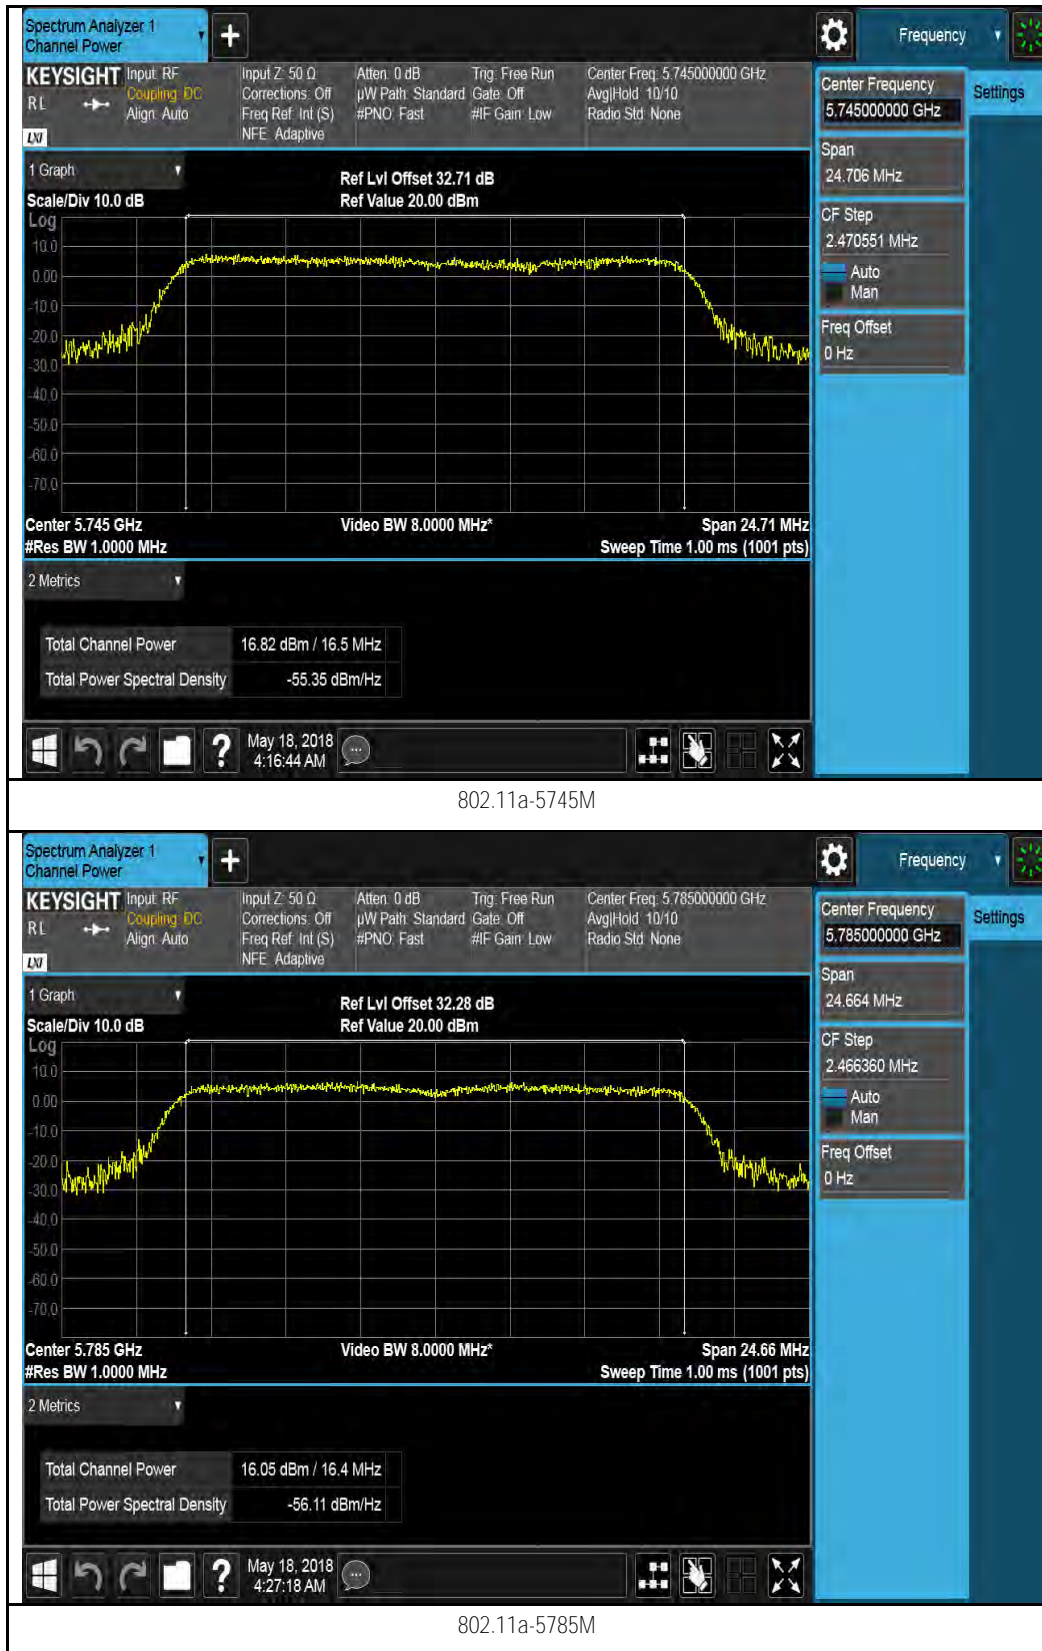





802.11a-5825M

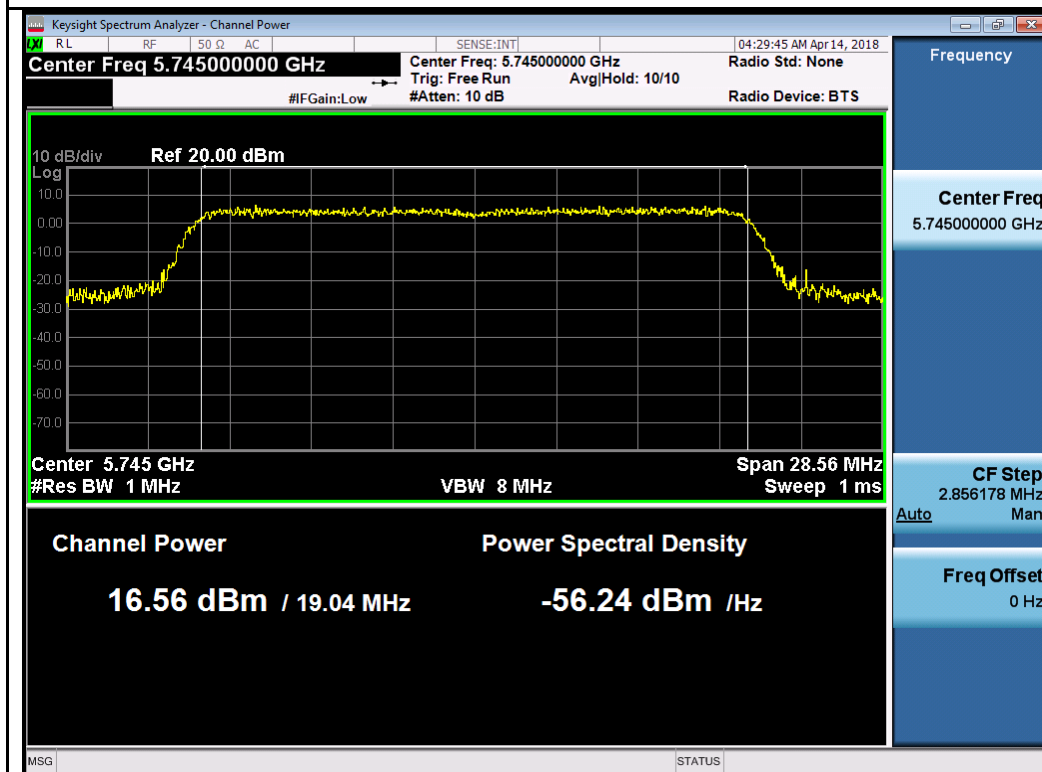


802.11ax20 5745M

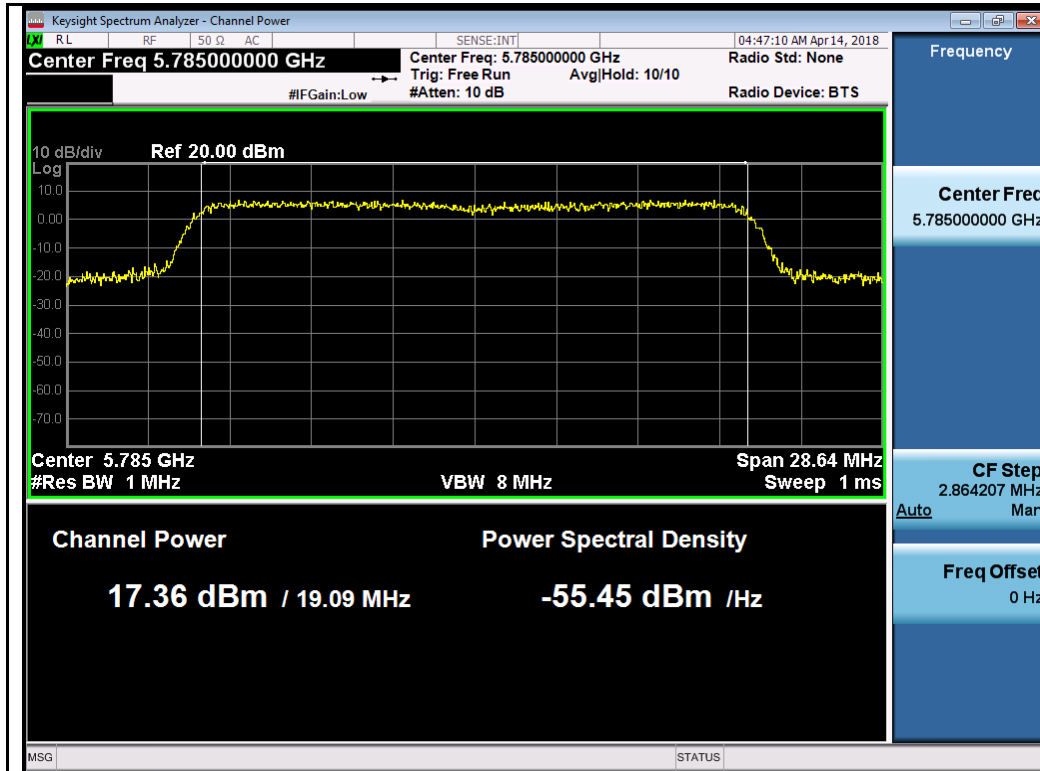


802.11ax20 5785M

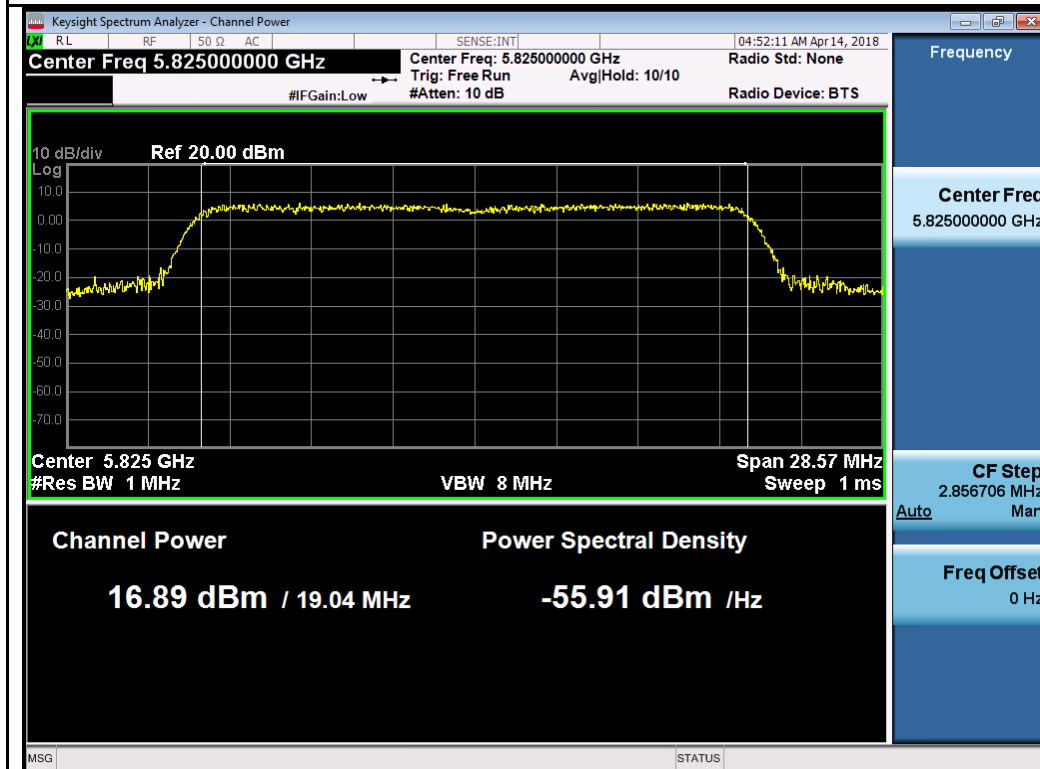

802.11ax20 5825M

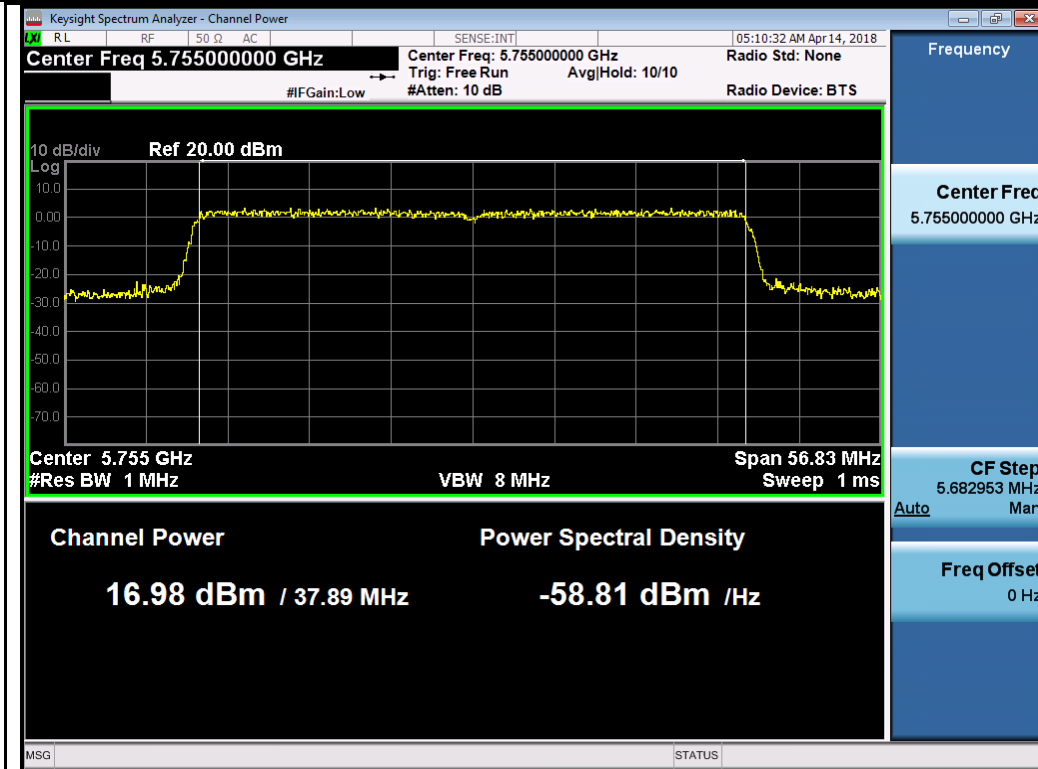

802.11ax40 5755M

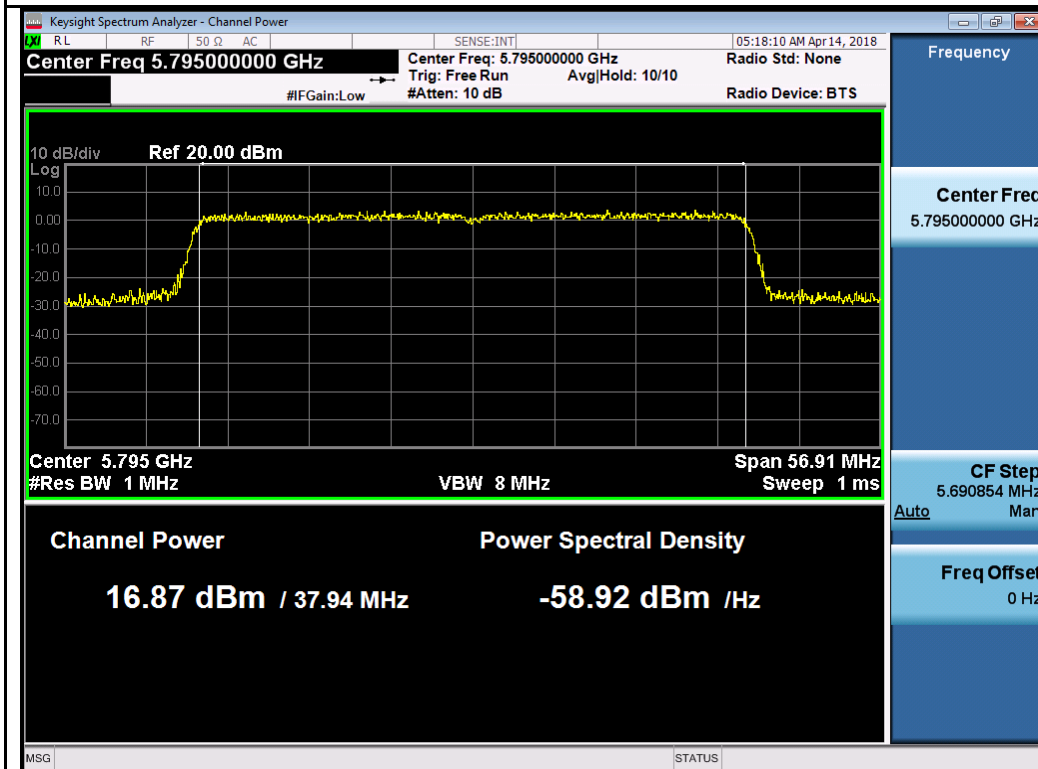

802.11ax40 5795M



