



RF TEST REPORT



Report No.: FCC_IC_RF_SL18091002-RUC-050_Co-location Rev_2.0
Supersede Report No.: FCC_IC_RF_SL18091002-RUC-050_Co-location Rev_1.0


Applicant	:	Ruckus Wireless, Inc.
Product Name	:	R750 Access Point
Model No.	:	R750
Test Standard	:	47 CFR 15.247 47 CFR 15.407 RSS-247 Issue 2, February 2017
Test Method	:	ANSI C63.10:2013 RSS-Gen Issue 5, April 2018 558074 D01 15.247 Meas Guidance v05r01 789033 D02 General U-NII Test Procedures New Rules v02r01 662911 D01 Multiple Transmitter Output v02r01 662911 D02 MIMO with Cross Polarized Antenna v01
FCC ID	:	S9GR750
IC	:	5912A-R750
Dates of test	:	03/04/2019-03/06/2019
Issue Date	:	06/11/2019
Test Result	:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Equipment complied with the specification <input checked="" type="checkbox"/>		
Equipment did not comply with the specification <input type="checkbox"/>		

This Test Report is Issued Under the Authority of:	
	
Deon Dai	Chen Ge
Test Engineer	Engineer Reviewer
<p>This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only</p>	

Issued By:
SIEMIC Laboratories
775 Montague Expressway, Milpitas, 95035 CA



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: www.siemic.com; Follow us at: 

Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC, RF/Wireless, Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless, Telecom
Taiwan	BSMI, NCC, NIST	EMC, RF, Telecom, Safety
Hong Kong	OFTA, NIST	RF/Wireless, Telecom
Australia	NATA, NIST	EMC, RF, Telecom, Safety
Korea	KCC/RRA, NIST	EMI, EMS, RF, Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety, EMC, RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom, Safety
Israel	MOC, NIST	EMC, RF, Telecom, Safety

Accreditations for Product Certifications

Country	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC, RF, Telecom
Canada	IC FCB, NIST	EMC, RF, Telecom
Singapore	iDA, NIST	EMC, RF, Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC (RCB 208)	RF, Telecom
Hong Kong	OFTA (US002)	RF, Telecom

CONTENTS

1	REPORT REVISION HISTORY	4
2	EXECUTIVE SUMMARY	5
3	CUSTOMER INFORMATION	5
4	TEST SITE INFORMATION	5
5	MODIFICATION	5
6	EUT INFORMATION	6
6.1	EUT Description	6
6.2	Radio Description	6
7	SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION.....	8
7.1	Supporting Equipment	8
7.2	Cabling Description	8
7.3	Test Software Description	8
8	TEST SUMMARY.....	9
9	MEASUREMENT UNCERTAINTY	10
10	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS.....	11
10.1	Radiated Spurious Emissions below 1GHz	11
10.2	Radiated Spurious Emissions above 1GHz.....	13
ANNEX A. TEST INSTRUMENT.....		15
ANNEX B. SIEMIC ACCREDITATION		16

1 Report Revision History

Report No.	Report Version	Description	Issue Date
FCC_IC_RF_SL18091002-RUC-050_Co-location	None	Original	05/23/2019
FCC_IC_RF_SL18091002-RUC-050_Co-location Rev_1.0	Rev_1.0	Update FCC ID	06/03/2019
FCC_IC_RF_SL18091002-RUC-050_Co-location Rev_2.0	Rev_2.0	Update Per Review	06/11/2019

2 Executive Summary

The purpose of this test program was to demonstrate compliance of following product

Company:	Ruckus Wireless, Inc.
Product:	R750 Access Point
Model:	R750

against the current Stipulated Standards. The specified model product stated above has demonstrated compliance with the Stipulated Standard listed on 1st page.

3 Customer information

Applicant Name	:	Ruckus Wireless, Inc.
Applicant Address	:	350 West Java Drive, Sunnyvale, California 94089 U.S.A
Manufacturer Name	:	Ruckus Wireless, Inc.
Manufacturer Address	:	350 West Java Drive, Sunnyvale, California 94089 U.S.A

4 Test site information

Lab performing tests	SIEMIC Laboratories
Lab Address	775 Montague Expressway, Milpitas, CA 95035
FCC Test Site No.	540430
IC Test Site No.	4842D
VCCI Test Site No.	A0133

5 Modification

Index	Item	Description	Note
-	-	-	-

6 EUT Information

6.1 EUT Description

Product Name	R750 Access Point
Model No.	R750
Trade Name	Ruckus
Serial No.	431806000043
Host Model No.	N/A
Input Power	Power Adapter: 48VDC 0.75A, or 48VDC (PoE)
Power Adapter Manu/Model	Ruckus / 740-64277-001
Power Adapter SN	N/A
Date of EUT received	02/18/2019
Equipment Class/ Category	DTS, UNII
Port/Connectors	Power Port, Ethernet*2, USB

6.2 Radio Description

Spec for BLE:

Radio Type	BLE
Operating Frequency	2402MHz-2480MHz
Modulation	GFSK
Channel Spacing	2 MHz
Antenna Type	PIFA Antenna
Antenna Gain	2.0 dBi
Antenna Connector Type	U.FL Connector

Spec for Zigbee:

Radio Type	Zigbee
Operating Frequency	2405MHz-2480MHz
Modulation	QPSK
Channel Spacing	5 MHz
Antenna Type	PIFA Antenna
Antenna Gain	2.0 dBi
Antenna Connector Type	U.FL Connector

Spec for 2.4G WLAN

Radio Type	802.11b	802.11g	802.11n-20M	802.11n-40M
Operating Frequency	2412-2462MHz	2412-2462MHz	2412-2462MHz	2422-2452MHz
Modulation	DSSS (CCK, DQPSK, DBPSK)	OFDM-CCK (BPSK, QPSK, 16QAM, 64QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM)
Channel Spacing	5MHz	5MHz	5MHz	5MHz
Number of Channels	11	11	11	7
Antenna Type	PCB Antenna			
Antenna Gain (Peak)	2.4G: 2.0 dBi			
Antenna Connector Type	I-Pex			
Note	2.4GHz and 5GHz Radio transmit simultaneously			

Spec for UNII-2A/2C

Radio Type	802.11a/n	802.11ac/ax-20M	802.11ax-40M	802.11ac/ax-40M	802.11ac/ax-80M
Operating Frequency	5260-5320MHz 5500-5720MHz		5270-5310MHz 5510-5710MHz		5290MHz, 5530MHz 5610MHz, 5690MHz
Modulation	OFDM (BPSK, QPSK, 16QAM, 64QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
Channel Spacing	20MHz		40MHz		80MHz
Number of Channels	16		6		4
Antenna Type	PCB Antenna				
Antenna Gain (Peak)	5GHz: 3dBi				
Antenna Connector Type	I-pex				
Note	2.4GHz and 5GHz Radio transmit simultaneously				

Spec for UNII-1-3

Radio Type	802.11a/n (20MHz)	802.11ac/ax (20MHz)	802.11n(40MHz)	802.11ac/ax (40MHz)	802.11ac/ax (80MHz)
Operating Frequency	5180-5240MHz 5745-5825MHz		5190-5230MHz 5755-5795MHz		5210MHz 5775MHz
Modulation	OFDM (BPSK, QPSK, 16QAM, 64QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
Channel Spacing	20MHz		40MHz		80MHz
Number of Channels	9		4		2
Antenna Type	PCB Antenna				
Antenna Gain (Peak)	5GHz: 3dBi				
Antenna Connector Type	I-pex				
Note	2.4GHz and 5GHz Radio transmit simultaneously				

7 Supporting Equipment/Software and cabling Description

7.1 Supporting Equipment

Item	Supporting Equipment Description	Model	Serial Number	Manufacturer	Note
1	Laptop	PP01L Latitude E5440	F1WPF12	Dell	-
2	POE Adapter	740-64211-001	133279963	Ruckus	-

7.2 Cabling Description

Name	Connection Start		Connection Stop		Length / shielding Info		Note
	From	I/O Port	To	I/O Port	Length (m)	Shielding	
RJ45	EUT	RJ45	POE	RJ45	2	Unshielded	-
RJ45	POE	RJ45	Laptop	RJ45	2	Unshielded	-

7.3 Test Software Description

Test Item	Software	Description
RF Testing	Putty	Set the EUT to transmit continuously in diferent test mode

8 Test Summary

Test Item	Test standard		Test Method/Procedure	Pass / Fail
Radiated Spurious Emissions	FCC	15.247(d) 15.407(b)(2), 15.407(b)(6)	ANSI C63.10:2013 789033 D02 General U-NII Test Procedures New Rules v02r01	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
	IC	RSS247 (5.5) RSS 247 (6.2)		
Remark	<ol style="list-style-type: none"> All measurement uncertainties are not taken into consideration for all presented test result. The applicant shall ensure frequency stability by showing that an emission is maintained within the band of operation under all normal operating conditions as specified in the user's manual. Reprt only show worse case test result (Zigbee, 2.4G WLAN, 5G WLAN Radio transmit simultaneously). DFS bands will be disabled until approved by FCC. Only Co-location test in this report, for other details please see test reports for FCC ID: S9GR750, IC: 5912A-R750 			

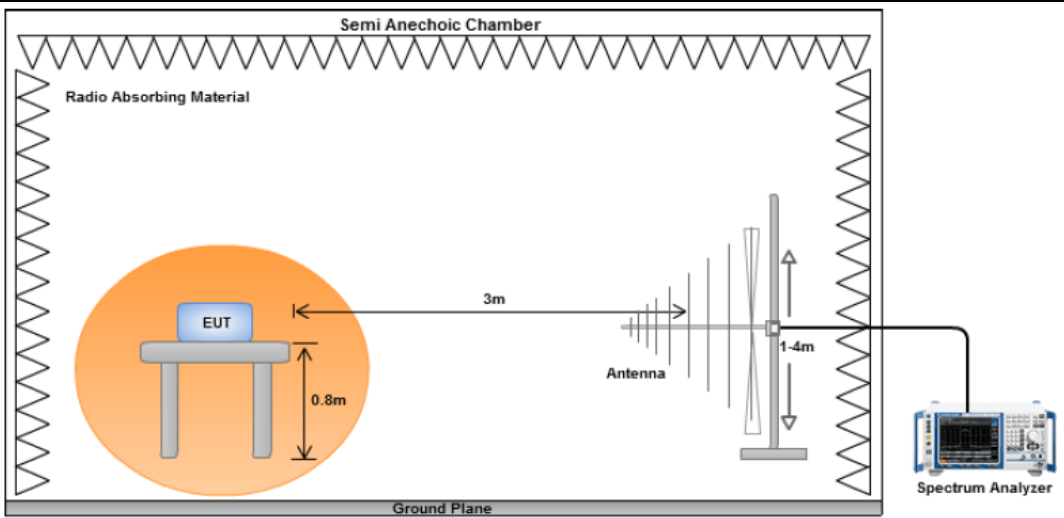
9 Measurement Uncertainty

Emissions			
Test Item	Frequency Range	Description	Uncertainty
AC Conducted Emissions	150KHz – 30MHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2	±3.5dB
RF conducted measurement	150KHz – 40GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2	±0.95dB
Radiated Spurious Emissions	30MHz – 1GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	±6dB
Radiated Spurious Emissions	1GHz – 40GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	±6dB

10 Measurements, Examination and Derived Results

10.1 Radiated Spurious Emissions below 1GHz

Requirement(s):

Spec	Requirement	Applicable										
47CFR§ 15.247(d) 15.407(b) 15.209 (a) RSS247 (5.5) RSS Gen	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (uV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength (uV/m)	30 – 88	100	88 – 216	150	216 960	200	Above 960	500	☒
Frequency range (MHz)	Field Strength (uV/m)											
30 – 88	100											
88 – 216	150											
216 960	200											
Above 960	500											
Test Setup	 <p>The diagram shows a Semi Anechoic Chamber with Radio Absorbing Material on the walls and a Ground Plane at the bottom. An EUT (Equipment Under Test) is placed on a table that is 0.8m high. The antenna is positioned 3m away from the EUT and is adjustable in height, ranging from 1m to 4m. A Spectrum Analyzer is connected to the antenna to measure the emissions.</p>											
Procedure	<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. The EUT was then rotated to the direction that gave the maximum emission. Finally, the antenna height was adjusted to the height that gave the maximum emission. A Quasi-peak measurement was then made for that frequency point. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured. 											
Remark	The EUT was scanned up to 1GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case.											
Result	☒ Pass ☐ Fail											

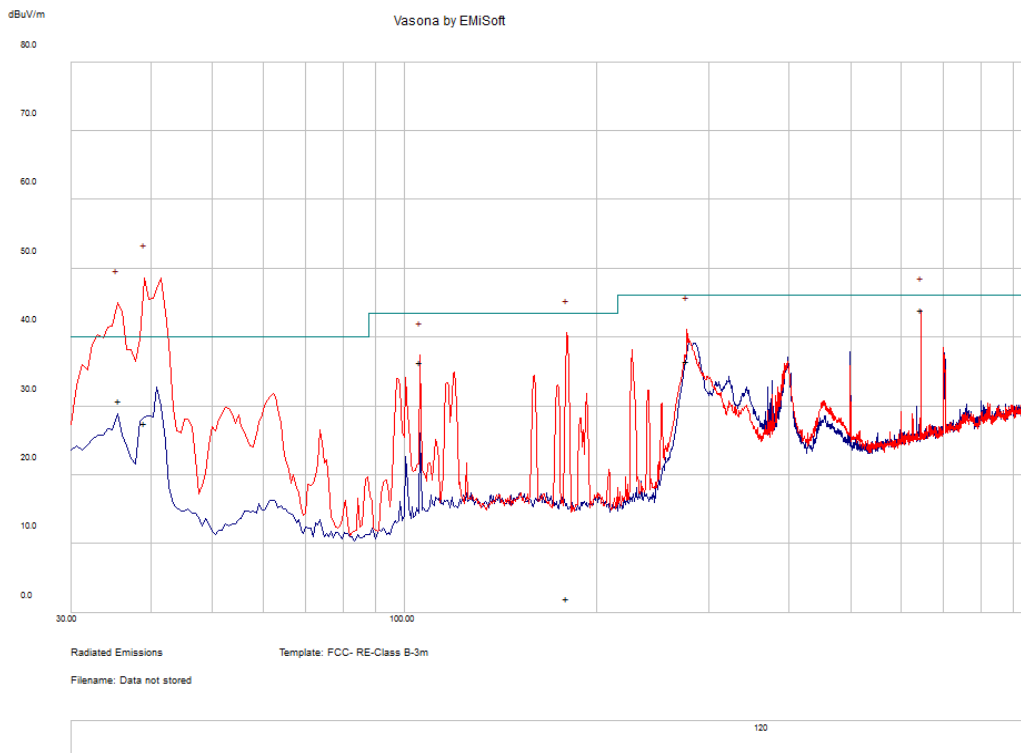
Test Data ☒ Yes (See below) ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test was done by Deon Dai at 10m chamber.

Radiated Emission Test Results (Below 1GHz)

Test specification	below 1GHz			Result	Pass
Environmental Conditions:	Temp (°C):	23			
	Humidity (%)	46			
	Atmospheric (mbar):	1017			
Mains Power:	120VAC, 60Hz				
Tested by:	Deon Dai				
Test Date:	03/04/2019				
Remarks:	Zigbee,2.4G 5G WLAN transmit simultaneously				

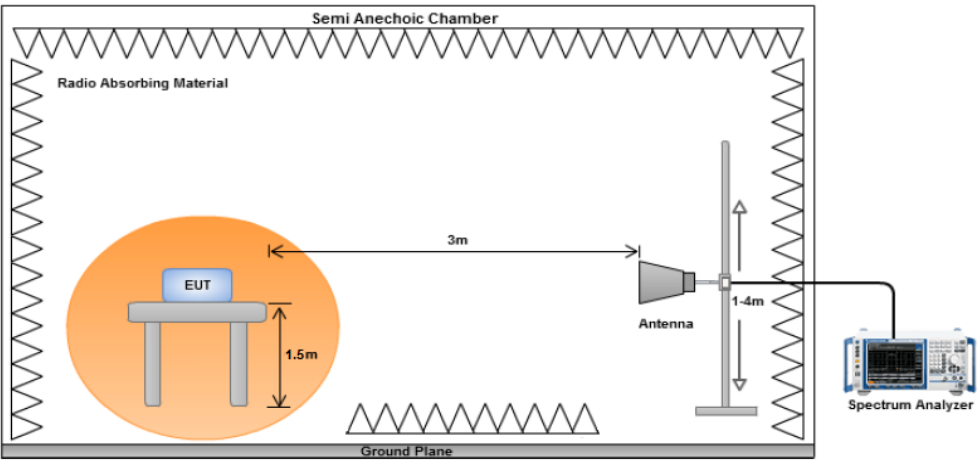


Frequency MHz	Raw dBuV/m	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
39.08	35.9	11.29	-19.66	27.52	Quasi Max	V	149	327	40	-12.48	Pass
35.67	36.75	11.21	-17.09	30.87	Quasi Max	V	101	93	40	-9.13	Pass
644.54	44.98	14.99	-15.86	44.11	Quasi Max	V	100	252	46	-1.89	Pass
179.70	14.78	12.43	-25.1	2.11	Quasi Max	V	280	232	43.5	-41.4	Pass
276.75	45.94	13.15	-22.53	36.56	Quasi Max	V	126	347	46	-9.44	Pass
105.73	48.8	11.92	-24.29	36.44	Quasi Max	V	106	136	43.5	-7.06	Pass

Note: Both horizontal and vertical polarities were investigated. The results above show only the worst case.

10.2 Radiated Spurious Emissions above 1GHz

Requirement(s):

Spec	Item	Requirement	Applicable
47CFR§ 15.247(d) 15.407(b)(2), 15.407(b)(6) RSS 247 Issue 2, 2017	(1)	For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.	<input checked="" type="checkbox"/>
	(2)	For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band.	<input checked="" type="checkbox"/>
	(3)	For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.	<input checked="" type="checkbox"/>
	(4)	For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz.	<input checked="" type="checkbox"/>
	(5)	Restricted band, emission must also comply with the radiated emission limits specified in 15.209	<input checked="" type="checkbox"/>
Test Setup			
Procedure	<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. The EUT was then rotated to the direction that gave the maximum emission. Finally, the antenna height was adjusted to the height that gave the maximum emission. An average measurement was then made for that frequency point. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured. 		
Remark	The EUT was scanned up to 40GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case.		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes (See below) N/A

Test Plot Yes (See below) N/A

Test was done by Deon Dai at 10m chamber.

















Radiated Emission Test Results (Above 1GHz)
Above 1GHz-40GHz – Co-location








Frequency MHz	Raw dBuV/m	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
4879.54	50.55	4.17	-11.03	43.69	Peak Max	V	158	233	74	-30.31	Pass
4824.25	53.67	4.12	-10.92	46.87	Peak Max	H	208	148	74	-27.13	Pass
11000.35	53.77	6.13	-3.08	56.82	Peak Max	V	180	360	74	-17.18	Pass
4879.54	35.3	4.17	-11.03	28.44	Average Max	V	149	115	54	-25.56	Pass
4824.25	38.34	4.12	-10.92	31.54	Average Max	H	208	234	54	-22.46	Pass
11000.35	39.23	6.13	-3.08	42.28	Average Max	V	189	208	54	-11.72	Pass

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Cycle	Cal Due	In use
Radiated Emissions						
Keysight EXA 44GHz Spectrum Analyzer	N9030B(PXA)	MY57140374	08/20/2018	1 Year	08/20/2019	<input checked="" type="checkbox"/>
Bi-Log antenna (30MHz~6GHz)	JB6	A111717	08/12/2018	1 Year	08/12/2019	<input checked="" type="checkbox"/>
Horn Antenna (1GHz~26GHz)	3115	100059	01/26/2019	1 Year	01/26/2020	<input checked="" type="checkbox"/>
Horn Antenna (26GHz~40GHz)	AH-840	101013	08/28/2018	1 Year	08/28/2019	<input checked="" type="checkbox"/>
Pre-Amplifier(0.3MHz-6.5GHz)	LPA-6-30	11170602	02/06/2019	1 Year	02/06/2020	<input checked="" type="checkbox"/>
Pre-Amplifier (1-26.5GHz)	8449B	3008A00715	08/16/2018	1 Year	08/16/2019	<input checked="" type="checkbox"/>
Pre-Amp (10MHz~50GHz)	RAMP00M50GA	17032300047	02/10/2019	1 Year	02/10/2020	<input checked="" type="checkbox"/>

Annex B. SIEMIC Accreditation

Accreditations	Document	Scope / Remark
ISO 17025 (A2LA)		Please see the documents for the detailed scope
ISO Guide 65 (A2LA)		Please see the documents for the detailed scope
TCB Designation		A1, A2, A3, A4, B1, B2, B3, B4, C
FCC DoC Accreditation		FCC Declaration of Conformity Accreditation
FCC Site Registration		3 meter site
FCC Site Registration		10 meter site
IC Site Registration		3 meter site
IC Site Registration		10 meter site
EU NB		Radio & Telecommunications Terminal Equipment: EN45001 – EN ISO/IEC 17025
		Electromagnetic Compatibility: EN45001 – EN ISO/IEC 17025
Singapore iDA CB(Certification Body)	 	Phase I, Phase II
Vietnam MIC CAB Accreditation		Please see the document for the detailed scope
Hong Kong OFCA		(Phase II) OFCA Foreign Certification Body for Radio and Telecom
		(Phase I) Conformity Assessment Body for Radio and Telecom
Industry Canada CAB		Radio: Scope A – All Radio Standard Specification in Category I
		Telecom: CS-03 Part I, II, V, VI, VII, VIII

Japan Recognized Certification Body Designation		<p>Radio: A1. Terminal equipment for purpose of calling</p> <p>Telecom: B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law</p>
Korea CAB Accreditation		<p>EMI: KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI KN22: Test Method for EMI</p> <p>EMS: KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS</p>
		<p>Radio: RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68</p> <p>Telecom: President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4</p>
Taiwan NCC CAB Recognition		LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08
Taiwan BSMI CAB Recognition		CNS 13438
Japan VCCI		R-3083: Radiation 3 meter site
		C-3421: Main Ports Conducted Interference Measurement T-1597: Telecommunication Ports Conducted Interference Measurement
Australia CAB Recognition		<p>EMC: AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4</p>
		<p>Radio communications: AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771</p>
		<p>Telecommunications: AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06 AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1</p>
Australia NATA Recognition		AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2