



RF TEST REPORT



Report No.: FCC_SL17063001-RUC-018A1_W53W56
Supersede Report No.:





Applicant	:	Ruckus Wireless, Inc.
Product Name	:	T310 (C/D) Access Point
Model No.	:	T310
Test Standard	:	47 CFR 15.407
Test Method	:	ANSI C63.4: 2014 789033 D02 General UNII Test Procedures New Rules v01
FCC ID	:	S9GT310
IC ID	:	5912A-T310
Dates of test	:	08/21/2017-10/05/2017
Issue Date	:	10/06/2017
Test Result	:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Equipment complied with the specification <input checked="" type="checkbox"/>		
Equipment did not comply with the specification <input type="checkbox"/>		

This Test Report is Issued Under the Authority of:	
	
Cipher	Chen Ge
Test Engineer	Engineer Reviewer
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only	

Issued By:
SIEMIC Laboratories
775 Montague Expressway, Milpitas, 95035 CA



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: www.siemic.com; Follow us at:    

Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC, RF/Wireless, Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless, Telecom
Taiwan	BSMI, NCC, NIST	EMC, RF, Telecom, Safety
Hong Kong	OFTA, NIST	RF/Wireless, Telecom
Australia	NATA, NIST	EMC, RF, Telecom, Safety
Korea	KCC/RRA, NIST	EMI, EMS, RF, Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety, EMC, RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom, Safety
Israel	MOC, NIST	EMC, RF, Telecom, Safety

Accreditations for Product Certifications

Country	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC, RF, Telecom
Canada	IC FCB, NIST	EMC, RF, Telecom
Singapore	iDA, NIST	EMC, RF, Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC (RCB 208)	RF, Telecom
Hong Kong	OFTA (US002)	RF, Telecom

CONTENTS

1	REPORT REVISION HISTORY	4
2	EXECUTIVE SUMMARY	5
3	CUSTOMER INFORMATION	5
4	TEST SITE INFORMATION	5
5	MODIFICATION	5
6	EUT INFORMATION	6
6.1	EUT Description	6
6.2	Radio Description	6
7	SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION.....	8
7.1	Supporting Equipment	8
7.2	Cabling Description	8
7.3	Test Software Description	8
8	TEST SUMMARY.....	9
9	MEASUREMENT UNCERTAINTY	10
9.1	Conducted Emissions	10
9.2	Radiated Emissions (30MHz to 1GHz).....	10
9.3	Radiated Emissions (1GHz to 40GHz).....	11
9.4	RF conducted measurement.....	11
10	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	12
10.1	Conducted Emissions.....	12
10.2	6dB & 26 dB Bandwidth.....	17
10.3	Output Power	35
10.4	Peak Power Spectral Density	67
10.5	Band Edge Measurement	99
10.6	Radiated Spurious Emissions below 1GHz.....	116
10.7	Radiated Spurious Emissions above 1GHz.....	118
ANNEX A. TEST INSTRUMENT.....		130
ANNEX B. SIEMIC ACCREDITATION		131

1 Report Revision History

Report No.	Report Version	Description	Issue Date
FCC_SL17063001-RUC-018A1_W53W56	None	Original	10/06/2017

2 Executive Summary

The purpose of this test program was to demonstrate compliance of following product

Company: Ruckus Wireless, Inc.
Product: T310 (C/D) Access Point
Model: T310

against the current Stipulated Standards. The specified model product stated above has demonstrated compliance with the Stipulated Standard listed on 1st page.

3 Customer information

Applicant Name	:	Ruckus Wireless, Inc.
Applicant Address	:	350 West Java Drive, Sunnyvale, California 94089 U.S.A
Manufacturer Name	:	Ruckus Wireless, Inc.
Manufacturer Address	:	350 West Java Drive, Sunnyvale, California 94089 U.S.A

4 Test site information

Lab performing tests	SIEMIC Laboratories
Lab Address	775 Montague Expressway, Milpitas, CA 95035
FCC Test Site No.	881796
IC Test Site No.	4842D-2
VCCI Test Site No.	A0133

5 Modification

Index	Item	Description	Note
-	-	-	-

6 EUT Information

6.1 EUT Description

Product Name	T310 (C/D) Access Point
Model No.	T310
Trade Name	Ruckus
Serial No.	291706000098
Host Model No.	N/A
Input Power	100-240VAC 50/60Hz
Power Adapter Manu/Model	HK-AD-120A100-US
Power Adapter SN	N/A
Date of EUT received	08/20/2017
Equipment Class/ Category	DTS, UNII
Port/Connectors	PoE, Ethernet

6.2 Radio Description

Radio Type	802.11a	802.11n-20M	802.11n-40M	802.11ac-80M
Operating Frequency	5260-5320MHz 5500-5720MHz	5260-5320MHz 5500-5720MHz	5270-5310MHz 5510-5710MHz	5290MHz, 5530MHz 5610MHz, 5690MHz
Modulation	OFDM (BPSK, QPSK, 16QAM, 64QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM)
Channel Spacing	20MHz	20MHz	40MHz	80MHz
Number of Channels	16	16	6	4
Antenna Type	PCB Antenna			
Antenna Gain (Peak)	5GHz: 3.5 dBi for Vertical 2 dBi for Horizontal			
Antenna Connector Type	U.FL			
Note	Two PCB antenna's, One dual band horizontal, and One dual band vertical antenna.			

Note: The AP supports Beamforming mode and the power setting for Beamforming and Non-Beamforming modes are the same.

EUT Power level setting

Mode	Frequency	Power Setting
802.11-a	5260	44
802.11-a	5280	44
802.11-a	5320	40
802.11-n-20	5260	44
802.11-n-20	5280	44
802.11-n-20	5320	39
802.11-n-40	5270	44
802.11-n-40	5310	34
802.11-ac-80	5290	33
802.11-a	5500	42
802.11-a	5580	42
802.11-a	5700	42
802.11-n-20	5500	42
802.11-n-20	5580	42
802.11-n-20	5700	42
802.11-n-40	5510	34
802.11-n-40	5590	41
802.11-n-40	5670	41
802.11-ac-80	5530	32
802.11-ac-80	5610	42

CROSS Band channels power setting

Mode	Frequency	Power Setting
802.11-a	5720	42
802.11-n-20	5720	42
802.11-n-40	5710	40
802.11-ac-80	5690	40

Note: All data rate has been verified and worst case was used for all test items.

7 Supporting Equipment/Software and cabling Description

7.1 Supporting Equipment

Item	Supporting Equipment Description	Model	Serial Number	Manufacturer	Note
1	Laptop	VOSTRO 1520	26543939185	Dell	-

7.2 Cabling Description

Item	Connection Start		Connection Stop		Length / shielding Info		Note
	From	I/O Port	To	I/O Port	Length (m)	Shielding	
1	EUT	RJ45	Power Over Ethernet Injector	RJ45	>3m	N/A	-
2	Laptop	RJ45	Power Over Ethernet Injector	RJ45	>3m	N/A	

7.3 Test Software Description

Test Item	Software	Description
RF Testing	Command prompt	Set the EUT to transmit continuously in diferent test mode

8 Test Summary

Test Item	Test standard	Test Method/Procedure	Pass / Fail
Restricted Band of Operation	FCC 15.205	ANSI C63.4 – 2014 789033 D02 General UNII Test Procedures New Rules v01	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
AC Conducted Emissions Voltage	FCC 15.207(a)	ANSI C63.4 – 2014	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A

Test Item	Test standard	Test Method/Procedure	Pass / Fail
26 & 6 dB Emission Bandwidth	FCC 15.407 (a) (2)	789033 D02 General UNII Test Procedures New Rules v01	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
Maximum conducted Output Power	FCC 15.407 (a) (2)	789033 D02 General UNII Test Procedures New Rules v01	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
Power reduction (Antenna Gain > 6 dBi)	FCC 15.407 (a) (2)	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
Band Edge and Radiated Spurious Emissions	FCC 15.407(b)(2), 15.407(b)(6)	ANSI C63.4 – 2014 789033 D02 General UNII Test Procedures New Rules v01	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
Power Spectral Density	FCC 15.407 (a) (2)	789033 D02 General UNII Test Procedures New Rules v01	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
Frequency Stability	FCC 15.407 (g)	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
Transmit Power Control (TPC)	FCC 15.407 (h)(1)	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
User Manual	FCC -	-	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A

Remark	<ol style="list-style-type: none"> All measurement uncertainties are not taken into consideration for all presented test result. The applicant shall ensure frequency stability by showing that an emission is maintained within the band of operation under all normal operating conditions as specified in the user's manual.
--------	---

9 Measurement Uncertainty

9.1 Conducted Emissions

The test is to measure the conducted emissions to the mains port of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the LISN
- Uncertainty of cables
- Uncertainty due to the mismatches
- Etc, see the below table for details

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Receiver Reading	0.12	Rectangular	1.732	1	0.069284
Cable Insertion Loss	0.21	Normal	2	1	0.105
Filter Insertion Loss	0.25	Normal	2	1	0.125
LISN Insertion Loss	0.40	Normal	2	1	0.20
Receiver CW accuracy	0.5	Rectangular	1.732	1	0.2886836
Pulse Amplitude Response	1.5	Rectangular	1.732	1	0.86605081
PRF Response	1.5	Rectangular	1.732	1	0.86605081
Mismatch LISN - Receiver	0.25	U-Shape	1.414	1	0.1768033
LISN Impedance	2.5	Triangular	2.449	1	1.0208248
Combined Standard Uncertainty					1.928133
Expanded Uncertainty (K=2)					3.856266

The total derived measurement uncertainty is +/- 3.86 dB.

9.2 Radiated Emissions (30MHz to 1GHz)

The test is to measure the radiated emissions of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the antenna
- Uncertainty of cables
- Uncertainty due to the mismatches
- NSA Calibration
- Etc., details see the below table

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Receiver Reading	0.12	Rectangular	1.732	1	0.069284
Cable Insertion Loss	0.21	Normal	2	1	0.105
Filter Insertion Loss	0.25	Normal	2	1	0.125
Antenna Factor	0.65	Normal	2	1	0.325
Receiver CW accuracy	0.5	Rectangular	1.732	1	0.2886836
Pulse Amplitude Response	1.5	Rectangular	1.732	1	0.86605081
PRF Response	1.5	Rectangular	1.732	1	0.86605081
Mismatch Filter - Receiver	0.25	U-Shape	1.414	1	0.1768033
NSA Calibration	4.0	U-Shape	1.414	1	2.8288543
Combined Standard Uncertainty					3.0059131
Expanded Uncertainty (K=2)					6.0118262

The total derived measurement uncertainty is +/- 6.00 dB.

9.3 Radiated Emissions (1GHz to 40GHz)

The test is to measure the radiated emissions of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the antenna
- Uncertainty of cables
- Uncertainty due to the mismatches
- VSWR Calibration
- Etc., details see the below table

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Receiver Reading	0.12	Rectangular	1.732	1	0.0692840
Cable Insertion Loss	0.21	Normal	2	1	0.1050000
Filter Insertion Loss	0.25	Normal	2	1	0.1250000
Antenna Factor	0.65	Normal	2	1	0.3250000
Receiver CW accuracy	0.5	Rectangular	1.732	1	0.2886836
Pulse Amplitude Response	1.5	Rectangular	1.732	1	0.8660508
PRF Response	1.5	Rectangular	1.732	1	0.8660508
Mismatch Filter - Receiver	0.25	U-Shape	1.414	1	0.1768033
VSWR Calibration	2.0	U-Shape	1.414	1	1.4144272
Combined Standard Uncertainty					4.2363
Expanded Uncertainty (K=2)					8.4726

The total derived measurement uncertainty is +/- 8.47 dB.

9.4 RF conducted measurement

The test is to measure the RF output power from the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the Reference Level Uncertainty
- Uncertainty of variable attenuators
- Uncertainty of cables
- Uncertainty due to the mismatches

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Reference Level	0.12	Rectangular	1.732	1	0.069284
Cable Insertion Loss	0.21	Normal	2	1	0.105
Attenuator	0.25	Normal	2	1	0.125
Mismatch	0.25	U-Shape	1.414	1	0.1768033
Combined Standard Uncertainty					0.476087
Expanded Uncertainty (K=2)					0.952174


The total derived measurement uncertainty is +/- 0.95 dB.

10 Measurements, Examination and Derived Results

10.1 Conducted Emissions

Conducted Emission Limit

Frequency ranges (MHz)	Limit (dBuV)	
	QP	Average
0.15 ~ 0.5	66 – 56	56 – 46
0.5 ~ 5	56	46
5 ~ 30	60	50

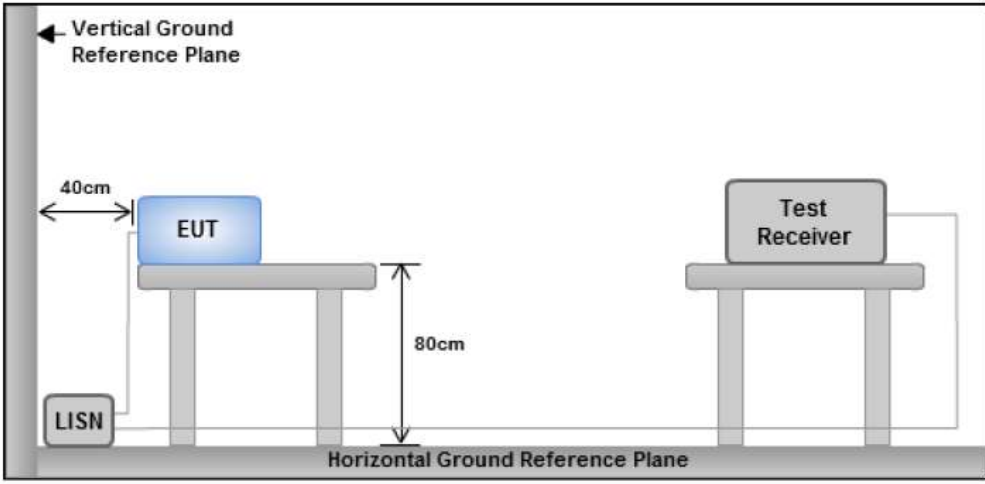Spec	Item	Requirement	Applicable
15.207(a)	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequency ranges.	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Note: 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes</p>		
Procedure	<ul style="list-style-type: none"> - The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B. - The power supply for the EUT was fed through a 50Ω/50μH EUT LISN, connected to filtered mains. - The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. - All other supporting equipment was powered separately from another main supply. 		
Remark	EUT was tested in two modes of operations: (1) P.O.E Mode; (2) Power Supply Mode		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		


Test Data Yes N/A

Test Plot Yes (See below) N/A

Test was done by **Kushal Shastri** at **Conducted Emission test site.**


Conducted Emission Test Results

Test specification:	Conducted Emissions				
Environmental Conditions:	Temp(°C):	25.7	Result:	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
	Humidity (%):	43.3			
	Atmospheric(mbar):	1014.9			
Mains Power:	120Vac, 60Hz				
Tested by:	Kushal Shastri				
Test Date:	08/21/2017-10/05/2017				
Remarks	Neutral- P.O.E Mode				

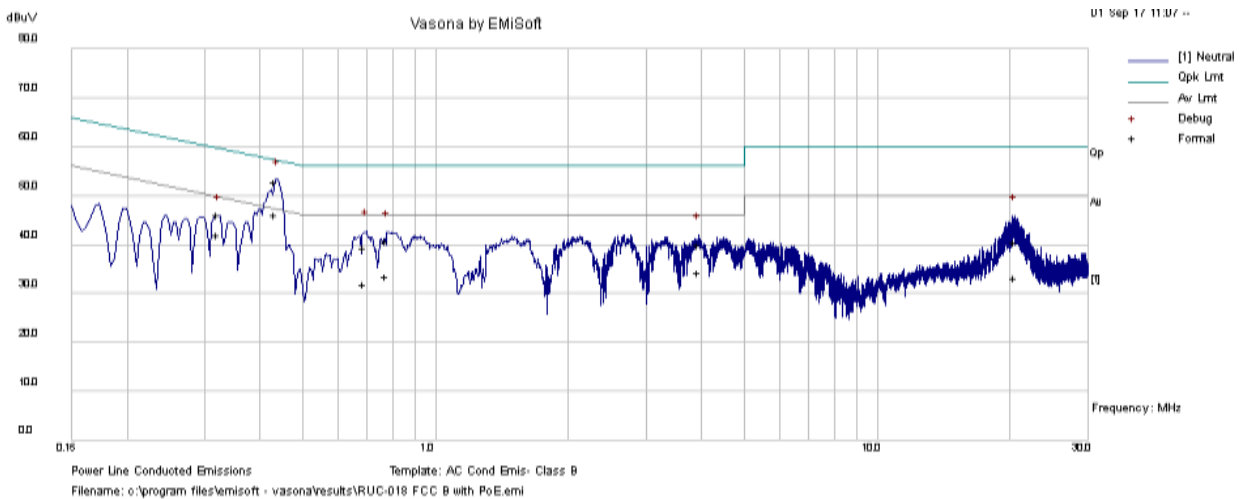


Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	Factors (dB)	Level (dBuV)	Measurement Type	Line / Neutral	Limit (dBuV)	Margin (dB)	Pass /Fail
0.432421	42.16	10.01	0.68	52.84	Quasi Peak	Neutral	57.21	-4.36	Pass
0.686549	28.78	10.01	0.56	39.35	Quasi Peak	Neutral	56	-16.65	Pass
0.771415	30.22	10.01	0.55	40.78	Quasi Peak	Neutral	56	-15.22	Pass
0.319527	35.24	10	0.81	46.06	Quasi Peak	Neutral	59.72	-13.66	Pass
3.932571	29.4	10.03	0.5	39.93	Quasi Peak	Neutral	56	-16.07	Pass
20.48071	29.82	10.07	0.67	40.56	Quasi Peak	Neutral	60	-19.44	Pass
0.432421	35.47	10.01	0.68	46.15	Average	Neutral	47.21	-1.06	Pass
0.686549	21.35	10.01	0.56	31.92	Average	Neutral	46	-14.08	Pass
0.771415	23.03	10.01	0.55	33.6	Average	Neutral	46	-12.4	Pass
0.319527	31.06	10	0.81	41.88	Average	Neutral	49.72	-7.84	Pass
3.932571	23.65	10.03	0.5	34.18	Average	Neutral	46	-11.82	Pass
20.48071	22.54	10.07	0.67	33.28	Average	Neutral	50	-16.72	Pass

Test specification:	Conducted Emissions		
Environmental Conditions:	Temp(°C):	25.7	Result:
	Humidity (%):	43.3	
	Atmospheric(mbar):	1014.9	
Mains Power:	120Vac, 60Hz		<input checked="" type="checkbox"/> Pass
Tested by:	Kushal Shastri		<input type="checkbox"/> Fail
Test Date:	08/21/2017-10/05/2017		
Remarks	Live - P.O.E Mode		

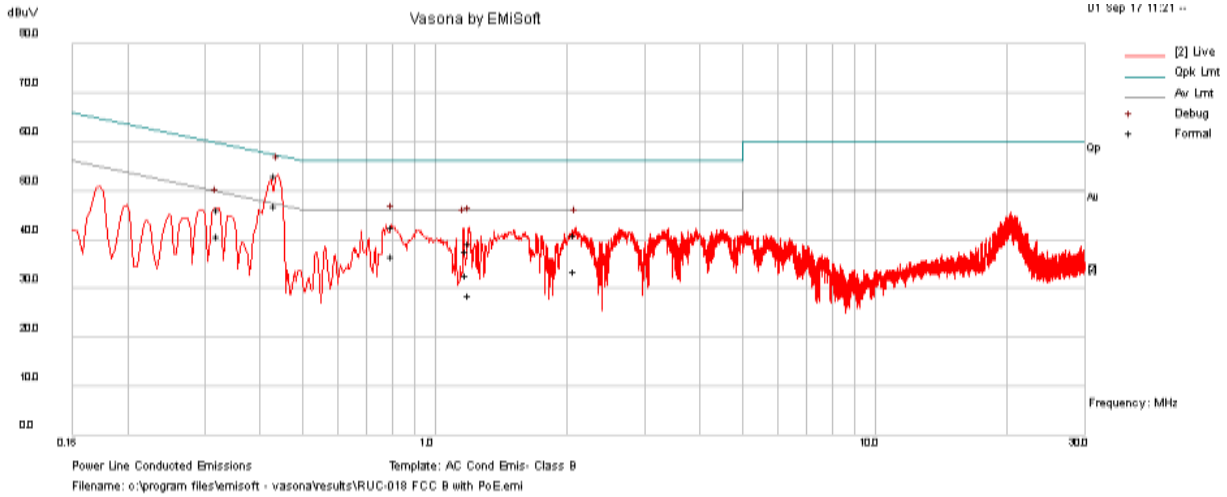


Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	Factors (dB)	Level (dBuV)	Measurement Type	Line / Neutral	Limit (dBuV)	Margin (dB)	Pass /Fail
0.432709	42.5	10.01	0.68	53.18	Quasi Peak	Live	57.2	-4.02	Pass
0.797327	32.02	10.01	0.55	42.58	Quasi Peak	Live	56	-13.42	Pass
0.320621	35.23	10	0.81	46.04	Quasi Peak	Live	59.69	-13.65	Pass
1.192701	28.73	10.02	0.52	39.27	Quasi Peak	Live	56	-16.73	Pass
2.080816	30.49	10.02	0.5	41.02	Quasi Peak	Live	56	-14.98	Pass
1.178802	27.07	10.02	0.52	37.6	Quasi Peak	Live	56	-18.4	Pass
0.432709	36.14	10.01	0.68	46.82	Average	Live	47.2	-0.38	Pass
0.797327	25.95	10.01	0.55	36.52	Average	Live	46	-9.48	Pass
0.320621	29.98	10	0.81	40.8	Average	Live	49.69	-8.89	Pass
1.192701	18.15	10.02	0.52	28.69	Average	Live	46	-17.31	Pass
2.080816	22.94	10.02	0.5	33.46	Average	Live	46	-12.54	Pass
1.178802	22.11	10.02	0.52	32.65	Average	Live	46	-13.35	Pass

Test specification:	Conducted Emissions			
Environmental Conditions:	Temp(°C):	25.7	Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
	Humidity (%):	43.3		
	Atmospheric(mbar):	1014.9		
Mains Power:	120Vac, 60Hz			
Tested by:	Kushal Shastri			
Test Date:	08/21/2017-10/05/2017			
Remarks	Neutral- Power Supply			

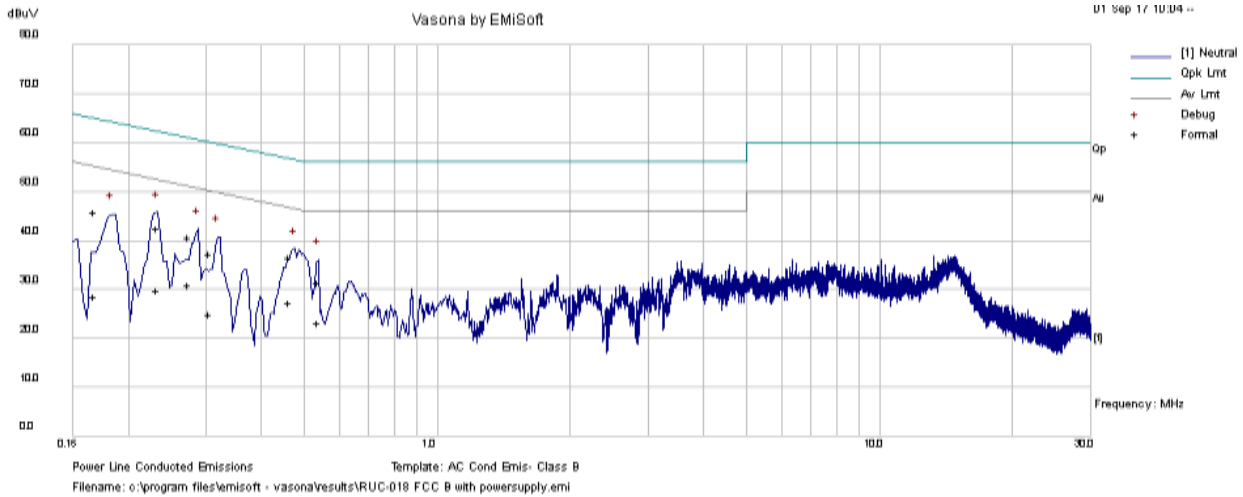

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	Factors (dB)	Level (dBuV)	Measurement Type	Line / Neutral	Limit (dBuV)	Margin (dB)	Pass /Fail
0.23281	31.49	10	1.08	42.58	Quasi Peak	Neutral	62.35	-19.77	Pass
0.463756	25.99	10.01	0.65	36.65	Quasi Peak	Neutral	56.63	-19.97	Pass
0.273752	29.75	10	0.93	40.68	Quasi Peak	Neutral	61	-20.32	Pass
0.168108	34.22	10	1.52	45.75	Quasi Peak	Neutral	65.05	-19.3	Pass
0.305904	26.39	10	0.84	37.23	Quasi Peak	Neutral	60.08	-22.85	Pass
0.536705	20.9	10.01	0.61	31.52	Quasi Peak	Neutral	56	-24.48	Pass
0.23281	18.74	10	1.08	29.82	Average	Neutral	52.35	-22.52	Pass
0.463756	16.74	10.01	0.65	27.4	Average	Neutral	46.63	-19.22	Pass
0.273752	19.99	10	0.93	30.91	Average	Neutral	51	-20.09	Pass
0.168108	17.16	10	1.52	28.69	Average	Neutral	55.05	-26.37	Pass
0.305904	14.22	10	0.84	25.06	Average	Neutral	50.08	-25.02	Pass
0.536705	12.69	10.01	0.61	23.31	Average	Neutral	46	-22.69	Pass


Test specification:	Conducted Emissions			
Environmental Conditions:	Temp(°C):	25.7	Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
	Humidity (%):	43.3		
	Atmospheric(mbar):	1014.9		
Mains Power:	120Vac, 60Hz			
Tested by:	Kushal Shastri			
Test Date:	08/21/2017-10/05/2017			
Remarks	Live- Power Supply			

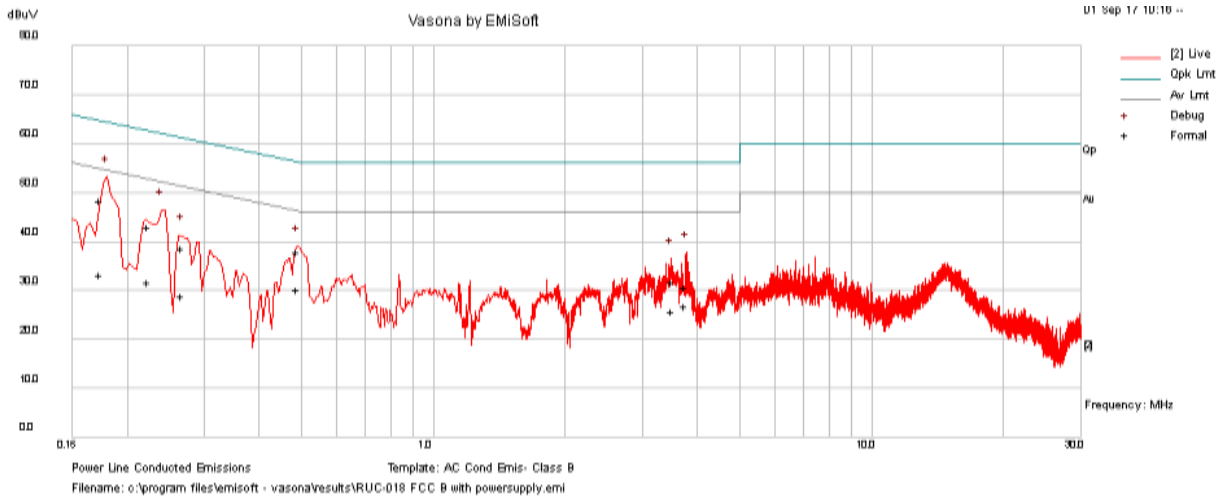

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	Factors (dB)	Level (dBuV)	Measurement Type	Line / Neutral	Limit (dBuV)	Margin (dB)	Pass /Fail
0.173242	37.05	10	1.47	48.52	Quasi Peak	Live	64.8	-16.28	Pass
0.223118	31.77	10	1.13	42.9	Quasi Peak	Live	62.7	-19.8	Pass
0.48802	27.3	10.01	0.64	37.95	Quasi Peak	Live	56.2	-18.25	Pass
3.762982	20.11	10.03	0.5	30.65	Quasi Peak	Live	56	-25.35	Pass
3.501415	21.29	10.03	0.5	31.82	Quasi Peak	Live	56	-24.18	Pass
0.267331	27.61	10	0.94	38.56	Quasi Peak	Live	61.2	-22.64	Pass
0.173242	21.71	10	1.47	33.18	Average	Live	54.8	-21.62	Pass
0.223118	20.52	10	1.13	31.65	Average	Live	52.7	-21.05	Pass
0.48802	19.45	10.01	0.64	30.1	Average	Live	46.2	-16.1	Pass
3.762982	16.34	10.03	0.5	26.87	Average	Live	46	-19.13	Pass
3.501415	15.15	10.03	0.5	25.68	Average	Live	46	-20.32	Pass
0.267331	17.79	10	0.94	28.74	Average	Live	51.2	-22.46	Pass

10.2 6dB & 26 dB Bandwidth

Requirement(s):

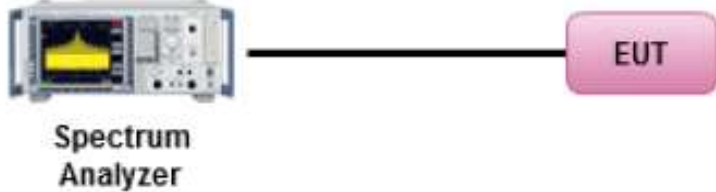Spec	Item	Requirement	Applicable
§ 15.407	-	26 dB Emission BW: Report only for reference.	<input checked="" type="checkbox"/>
		6 dB Emission BW: Report only for reference(Cross Band)	<input checked="" type="checkbox"/>
	a) (2)	26 dB Emission BW: Report only for power limit calculation.	<input type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>		
Test Procedure	<p>789033 D02 General UNII Test Procedures New Rules v01</p> <p><u>26dB Emission bandwidth measurement procedure (Other than 5.725-5.85 GHz)</u></p> <ul style="list-style-type: none"> - Use the spectrum analyzer built-in measurement function to determine the 26dB BW. <ul style="list-style-type: none"> o Set RBW = around 1% of emission bandwidth o Set VBW > RBW o Detector = Peak o Trace mode = max hold - Allow the trace to stabilize. - Capture the plot. - Repeat above steps for different test channel and other modulation type. <p><u>6dB Emission bandwidth measurement procedure</u></p> <ul style="list-style-type: none"> - Use the spectrum analyzer built-in measurement function to determine the 26dB BW. <ul style="list-style-type: none"> o Set RBW = 100kHz o Set VBW > 3RBW o Detector = Peak o Trace mode = max hold - Allow the trace to stabilize. - Capture the plot. - Repeat above steps for different test channel and other modulation type. 		
Test Date	08/21/2017-10/05/2017	Environmental condition	Temperature 23°C Relative Humidity 42% Atmospheric Pressure 1021mbar
Remark	N/A		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes N/A

Test Plot Yes N/A

Test was done by Cipher at RF test site.

26dB Bandwidth measurement result for 5.3GHz

Type	Test mode	Freq (MHz)	CH	Result (MHz)
26dB BW	802.11a	5260	Low	17.031
	802.11a	5280	Mid	16.589
	802.11a	5320	High	16.444
	802.11n-20	5260	Low	17.956
	802.11n-20	5280	Mid	17.999
	802.11n-20	5320	High	17.645
	802.11n-40	5270	Low	40.238
	802.11n-40	5310	High	35.987
	802.11ac-80	5290	Mid	75.662

26dB Bandwidth measurement result for 5.5GHz

Type	Test mode	Freq (MHz)	CH	Result (MHz)
26dB BW	802.11a	5500	Low	18.142
	802.11a	5580	Mid	16.941
	802.11a	5700	High	16.558
	802.11n-20	5500	Low	18.301
	802.11n-20	5580	Mid	18.351
	802.11n-20	5700	High	17.725
	802.11n-40	5510	Low	35.975
	802.11n-40	5590	Mid	36.504
	802.11n-40	5670	High	36.112
	802.11ac-80	5530	Low	75.640
	802.11ac-80	5610	High	77.077


26dB Bandwidth measurement result for cross channels

Type	Test mode	Freq (MHz)	CH	Result (MHz)
26dB BW	802.11a	5720	CROSS	16.436
	802.11n-20	5720	CROSS	17.664
	802.11n-40	5710	CROSS	36.056
	802.11ac-80	5690	CROSS	75.790


6 Bandwidth measurement result for cross channels

Type	Test mode	Freq (MHz)	CH	Result (MHz)
26dB BW	802.11a	5720	CROSS	16.459
	802.11n-20	5720	CROSS	17.695
	802.11n-40	5710	CROSS	35.275
	802.11ac-80	5690	CROSS	76.350


26dB Bandwidth Test Plots
W53:

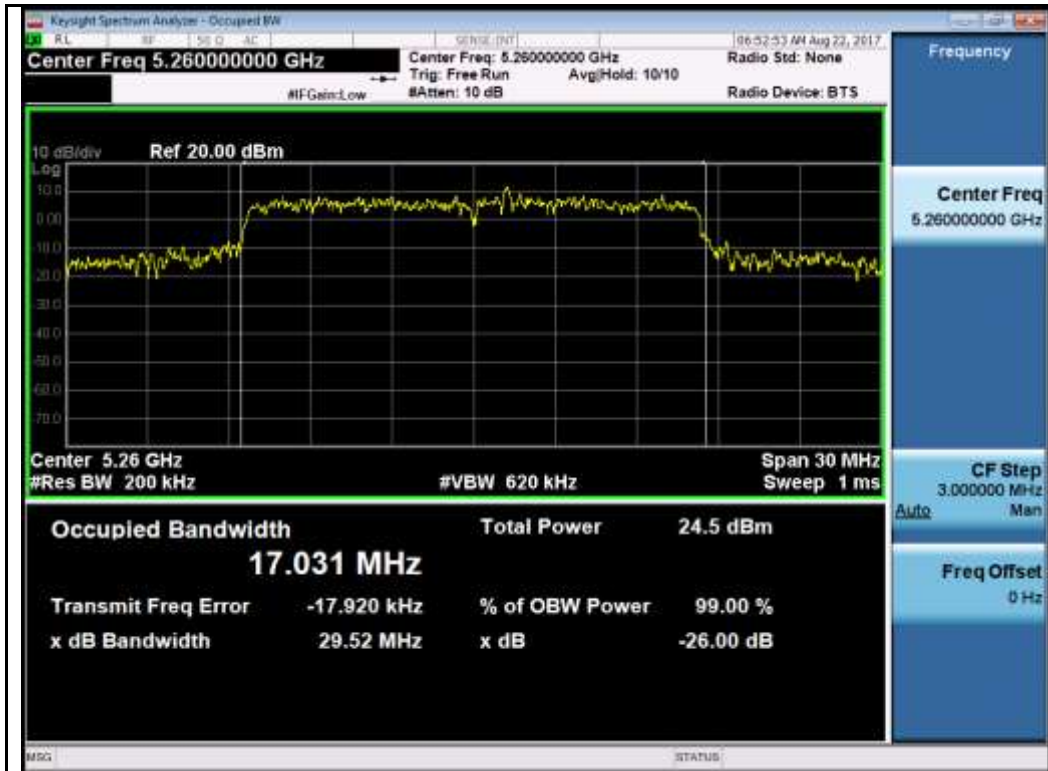

802.11a-5260MHz

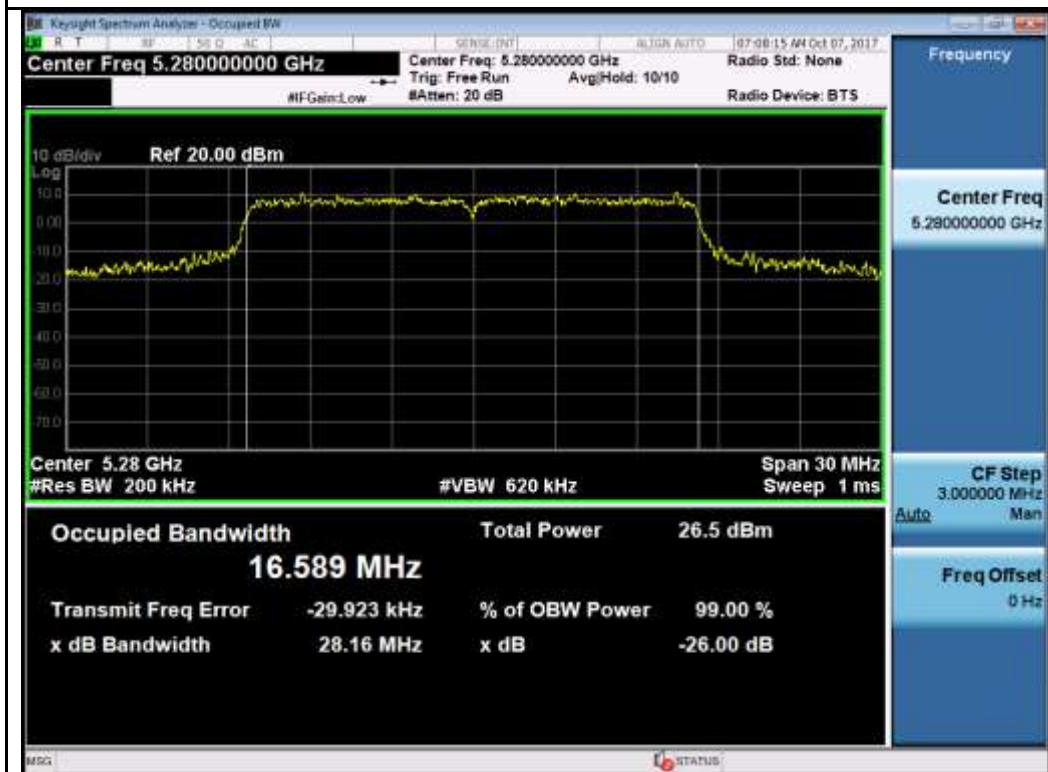


802.11a-5280MHz

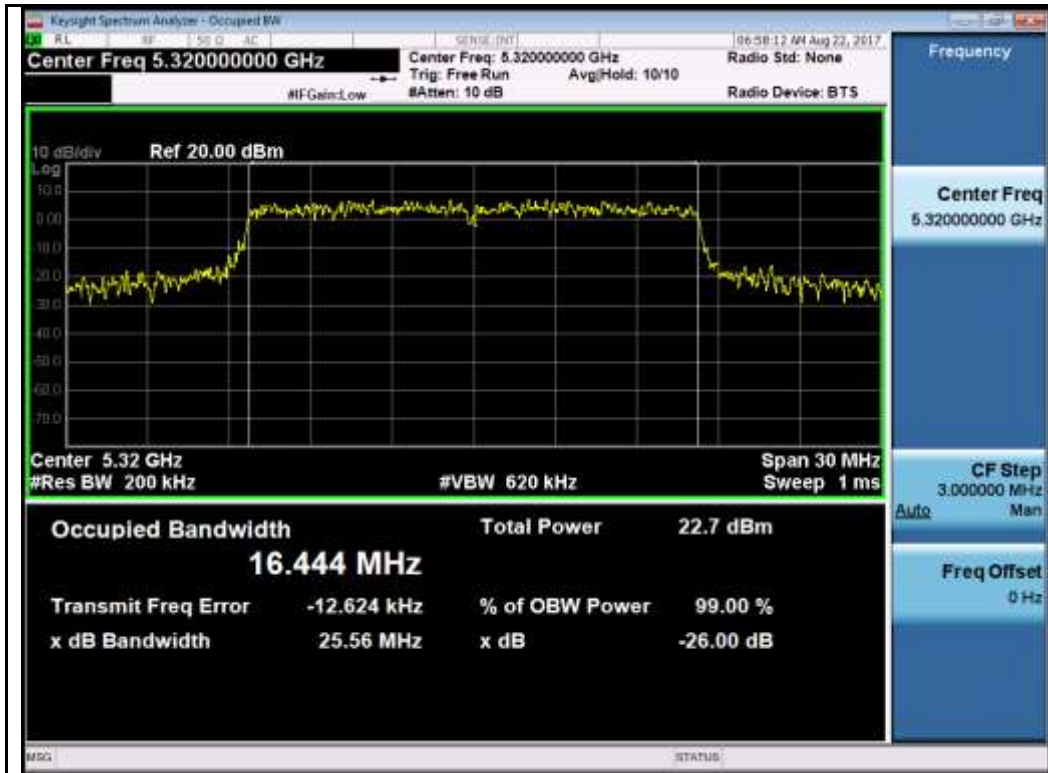


802.11a-5320MHz




802.11n-HT20-5260MHz

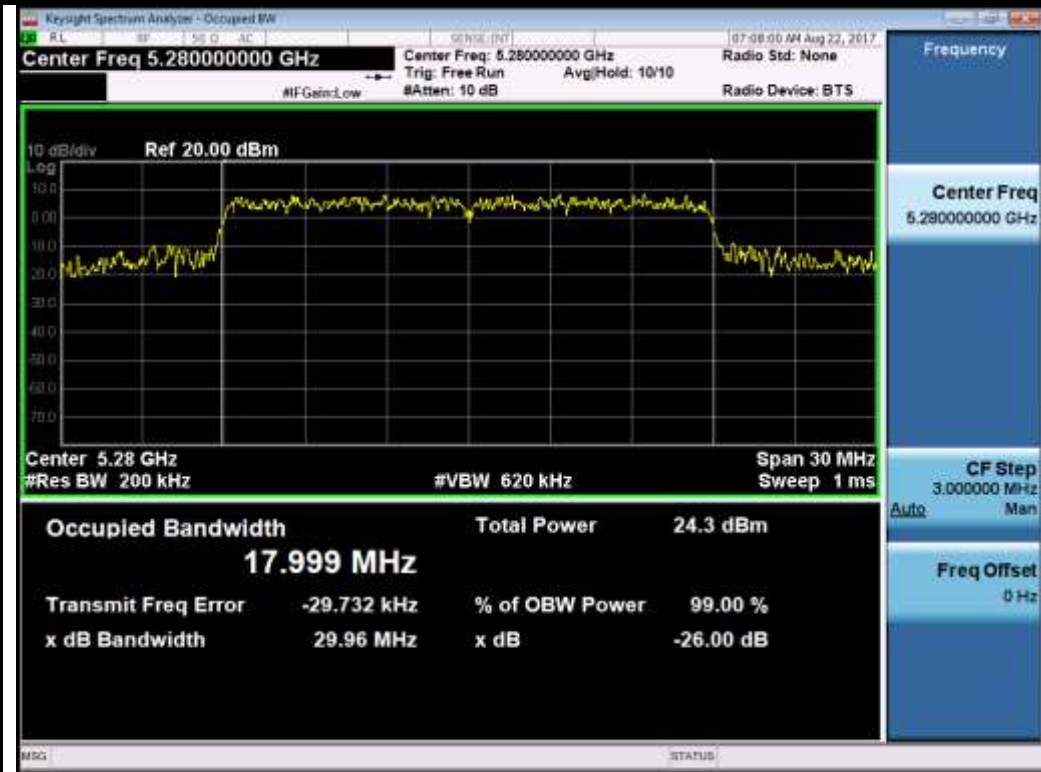

802.11n-HT20-5280MHz

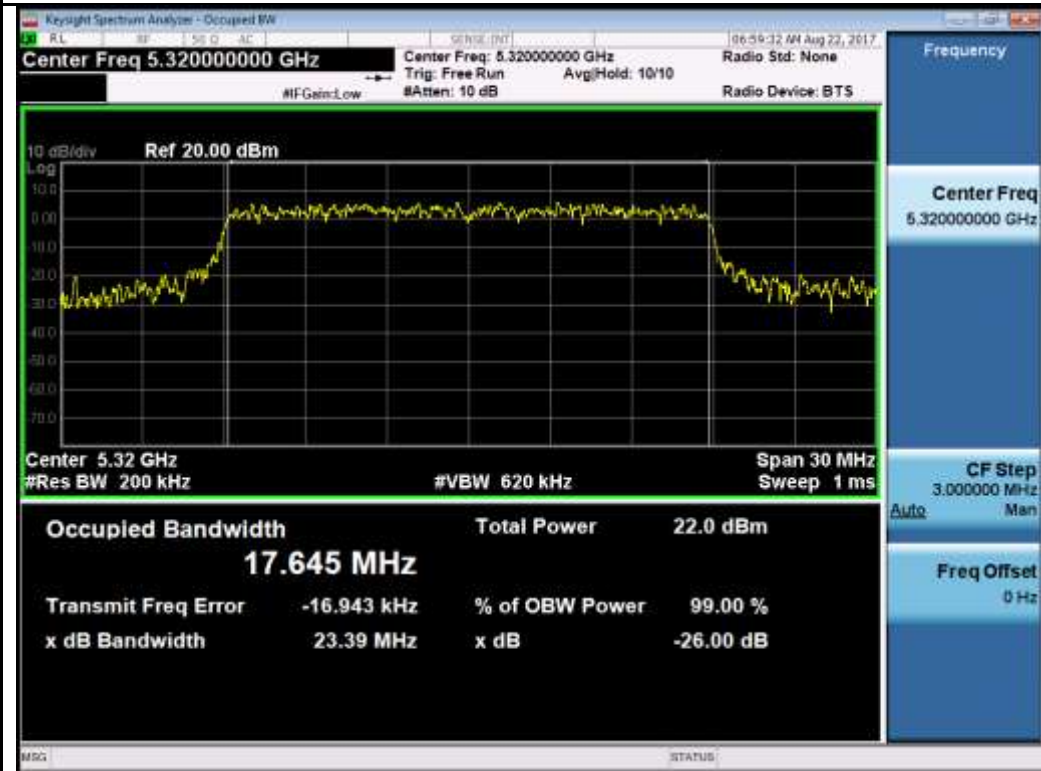


802.11n-HT20-5320MHz

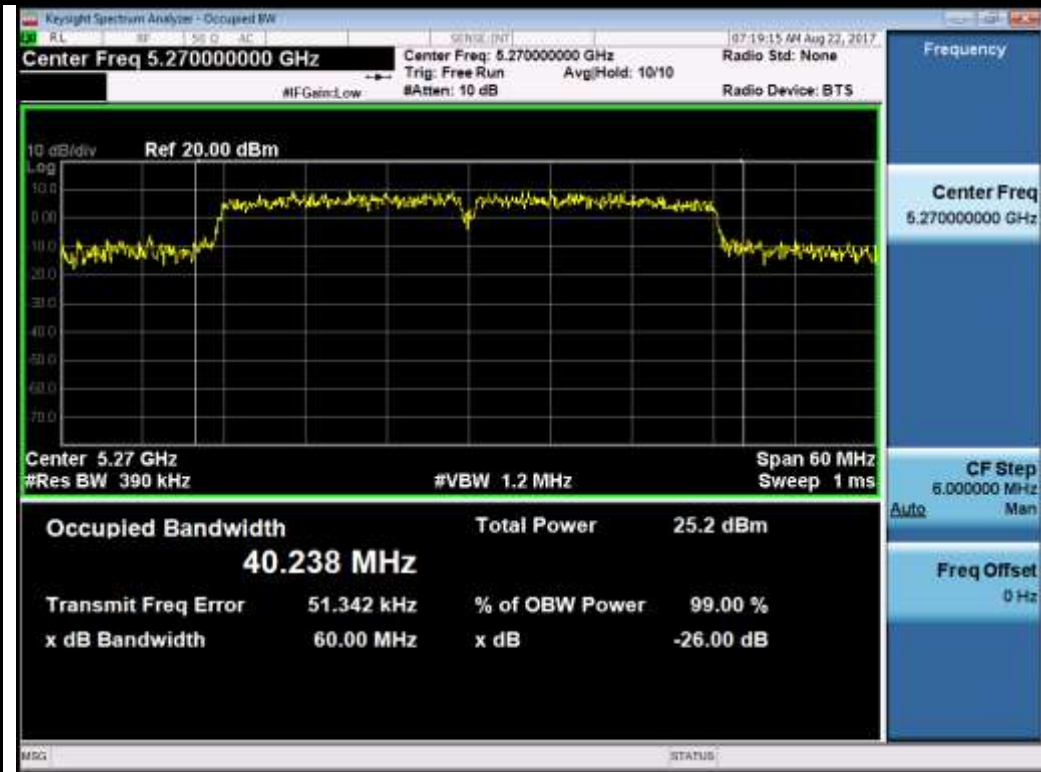


802.11n-HT40-5270MHz




802.11n-HT40-5310MHz

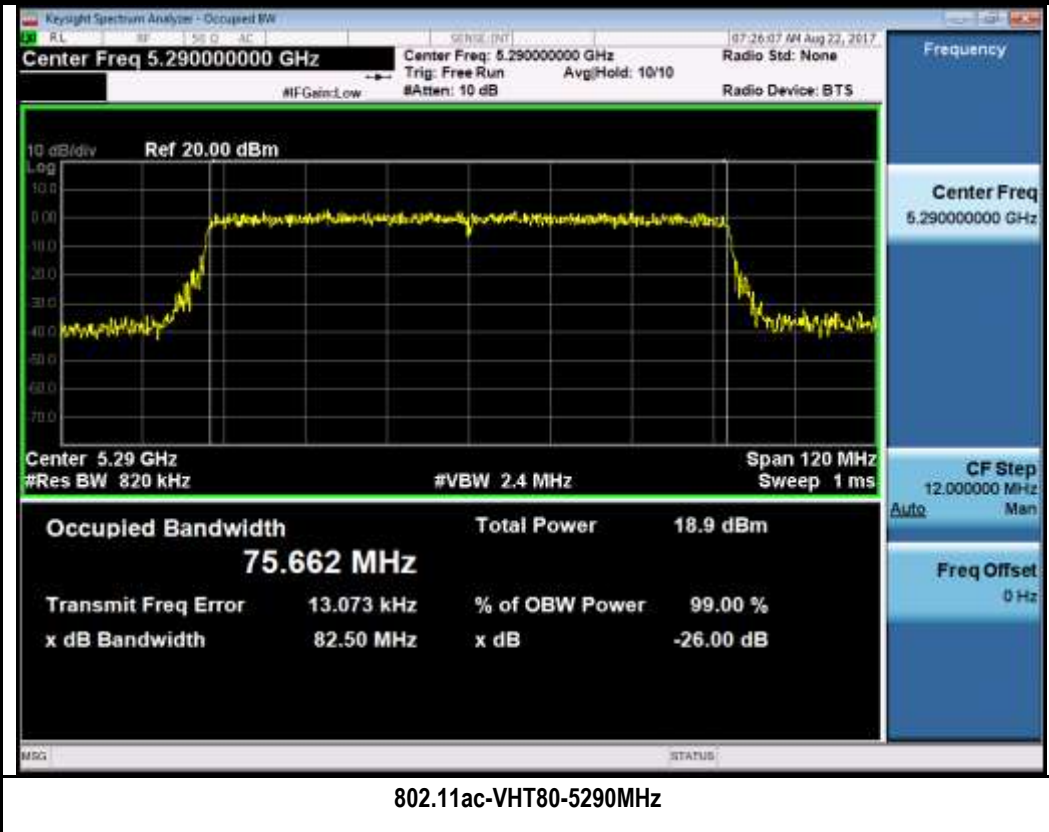

W56:

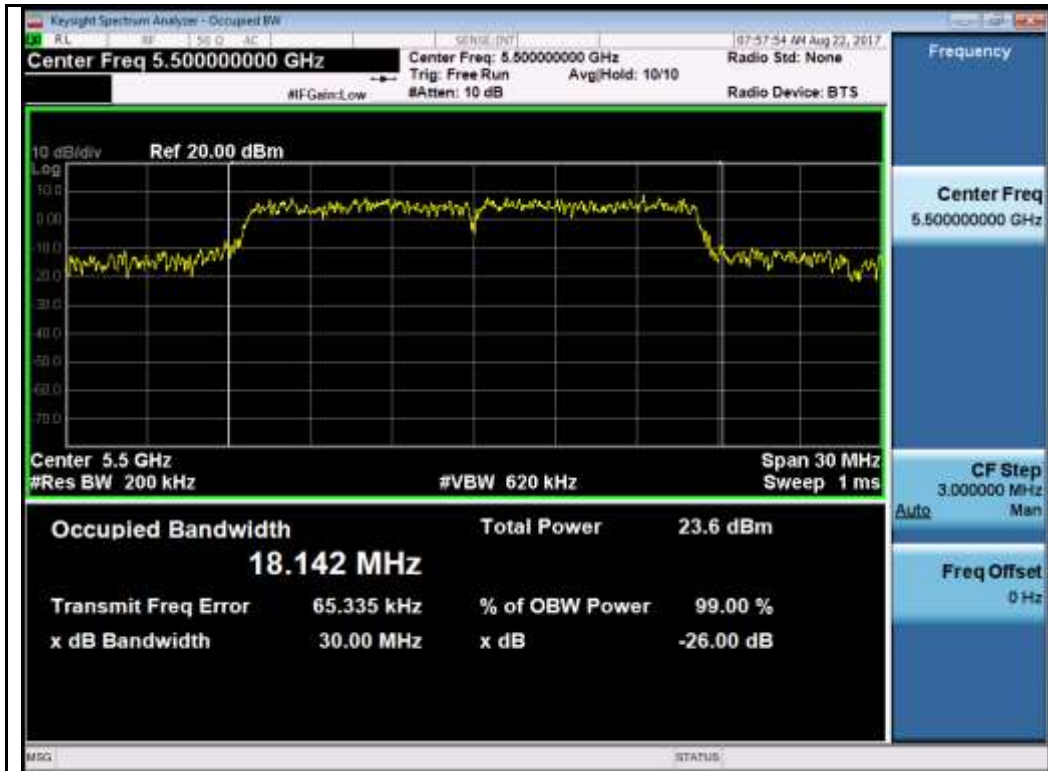


802.11a-5500MHz

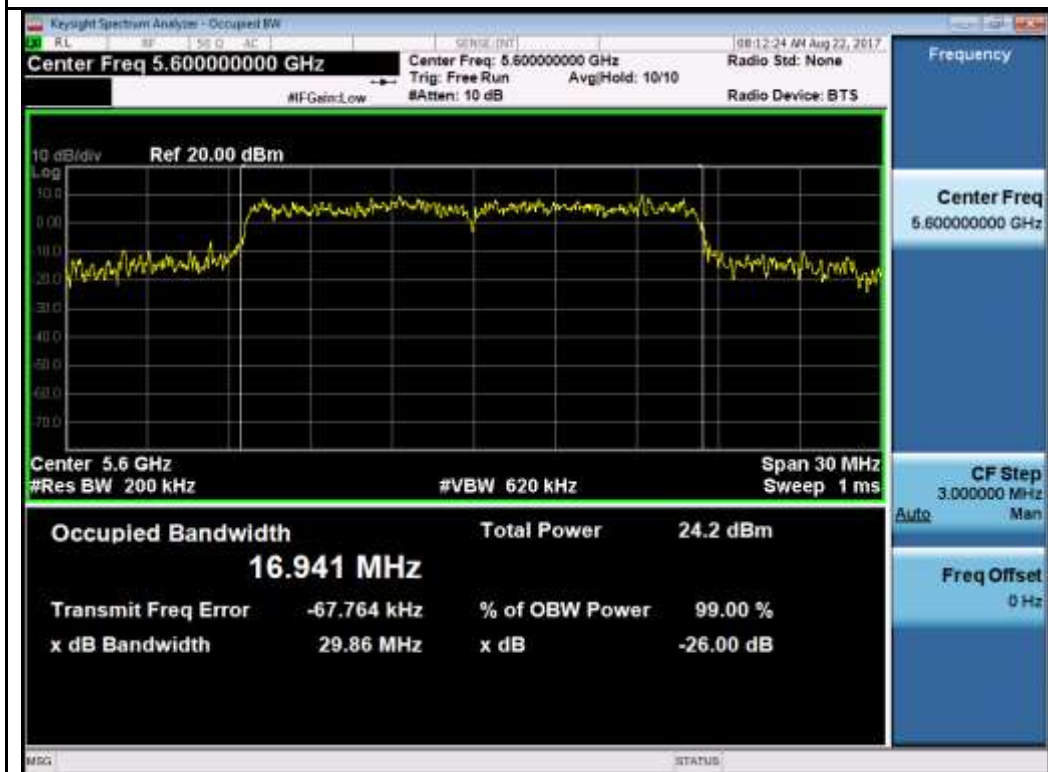


802.11a-5580MHz




802.11a-5700MHz

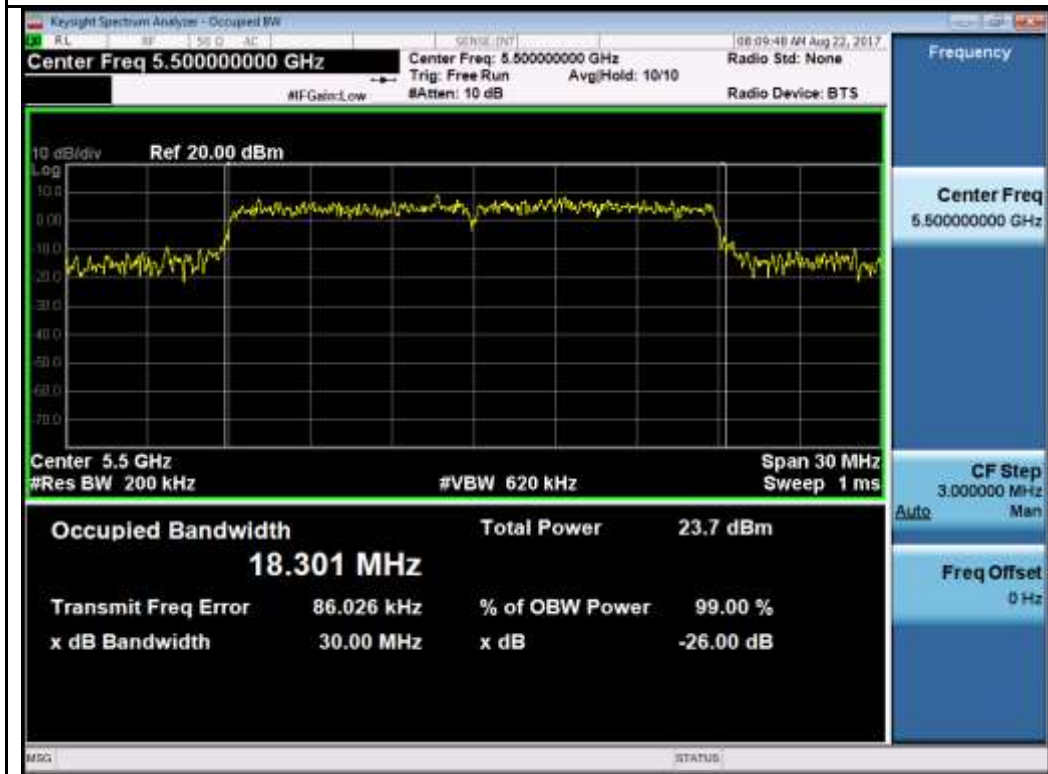


802.11n-HT20-5500MHz

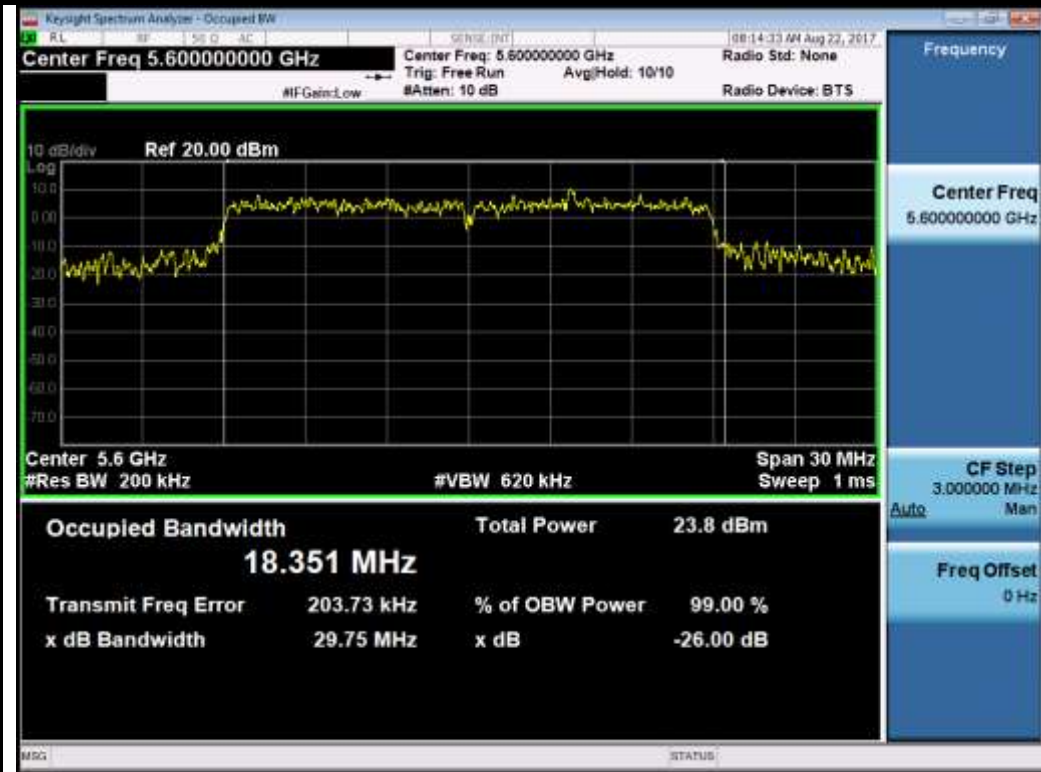

802.11n-HT20-5580MHz

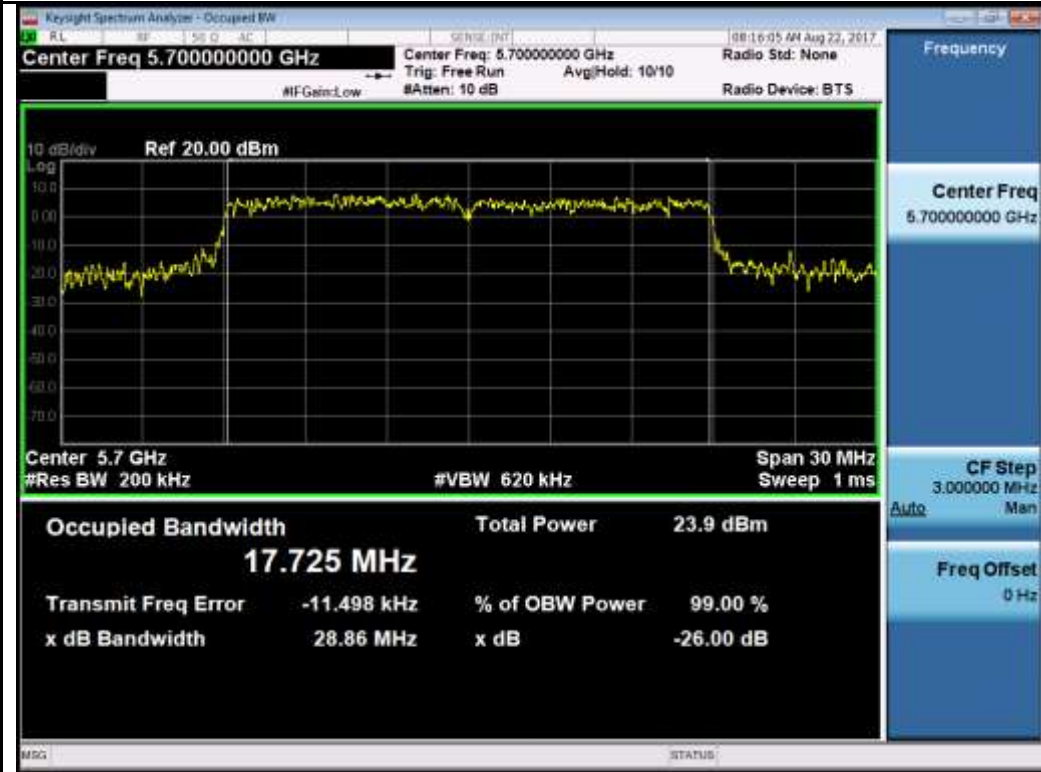


802.11n-HT20-5700MHz

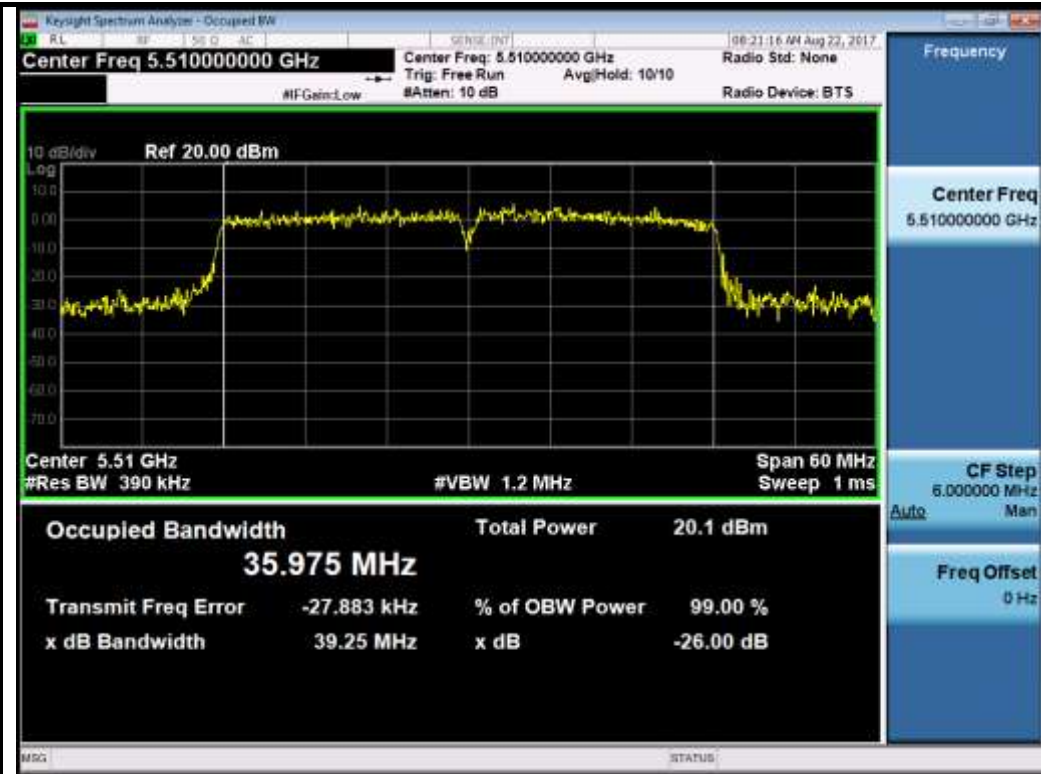

802.11n-HT40-5510MHz




802.11n-HT40-5550MHz

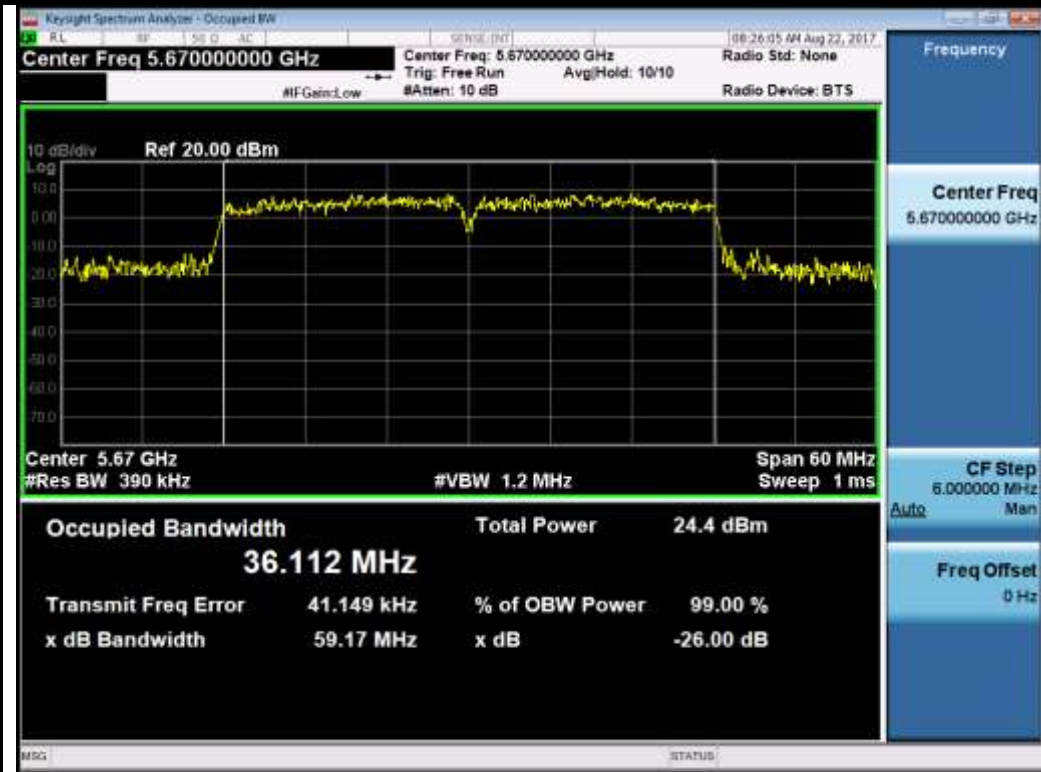


802.11n-HT40-5670MHz




802.11ac-VHT80-5530MHz

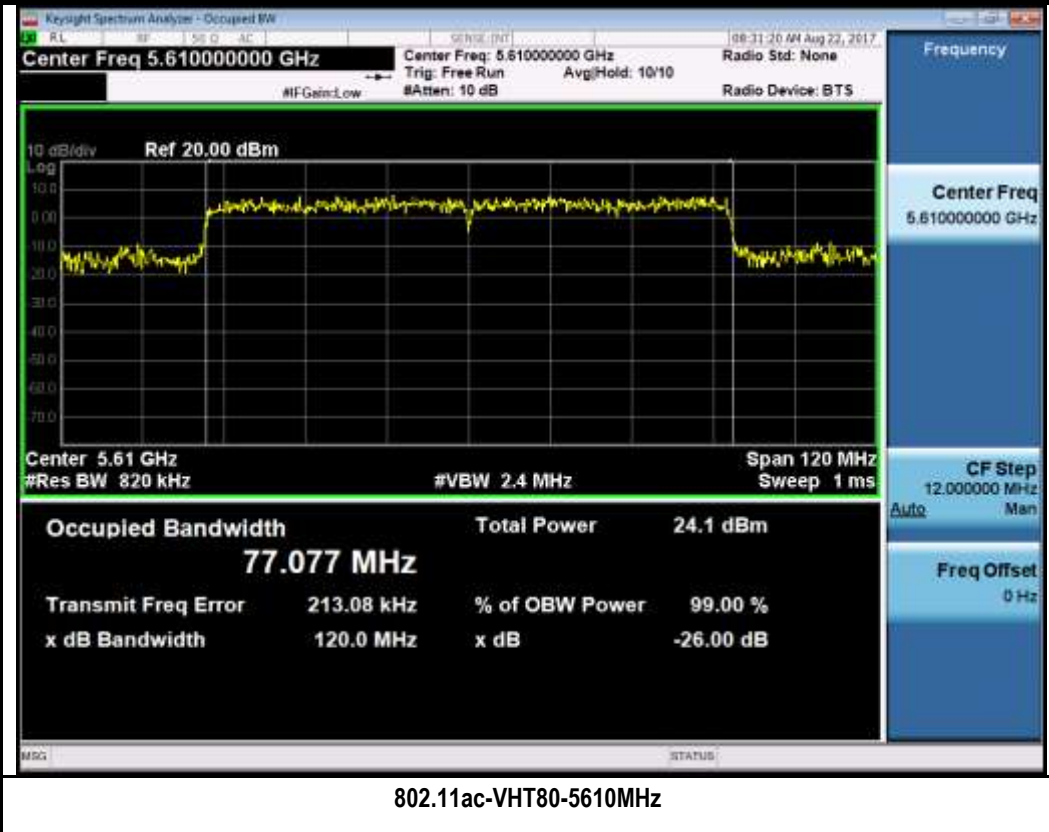

26dB BW Cross Band:

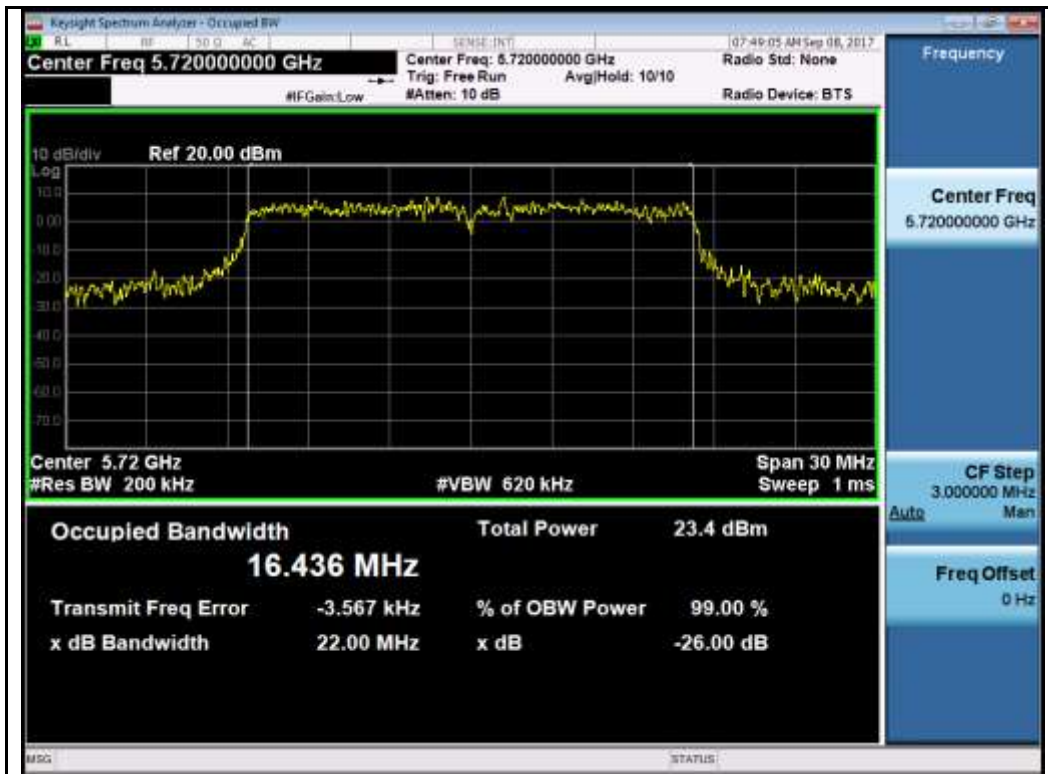


802.11a-5720MHz

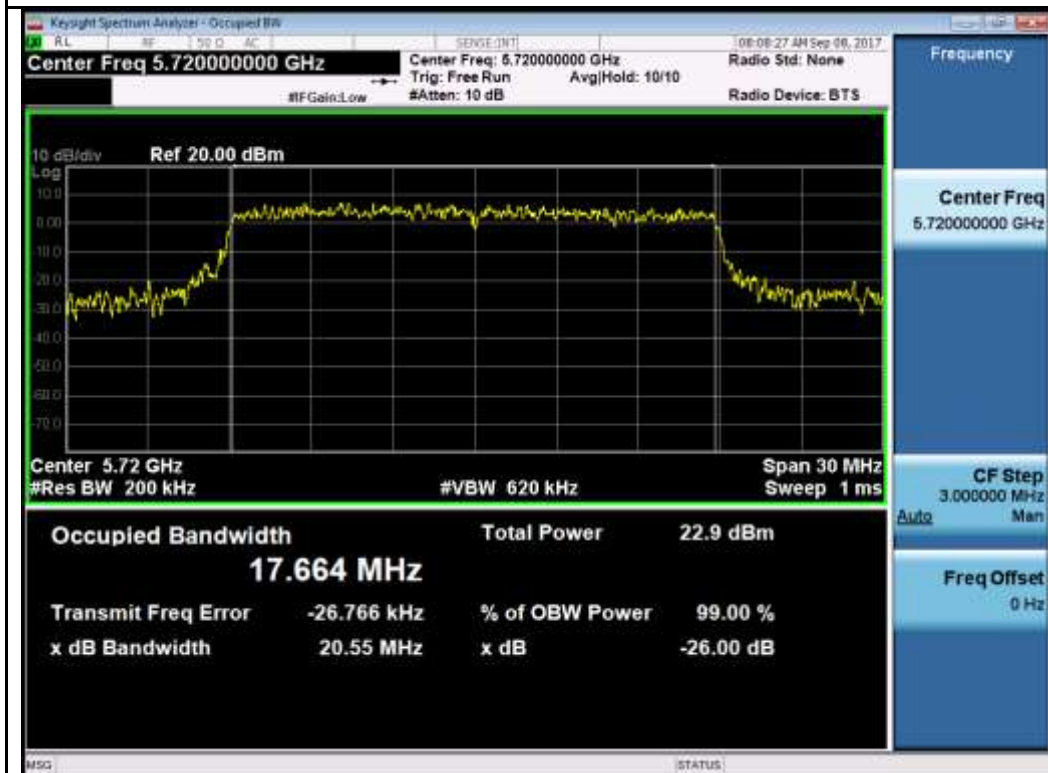

802.11n-HT20 5720MHz



802.11n-HT40 5710MHz

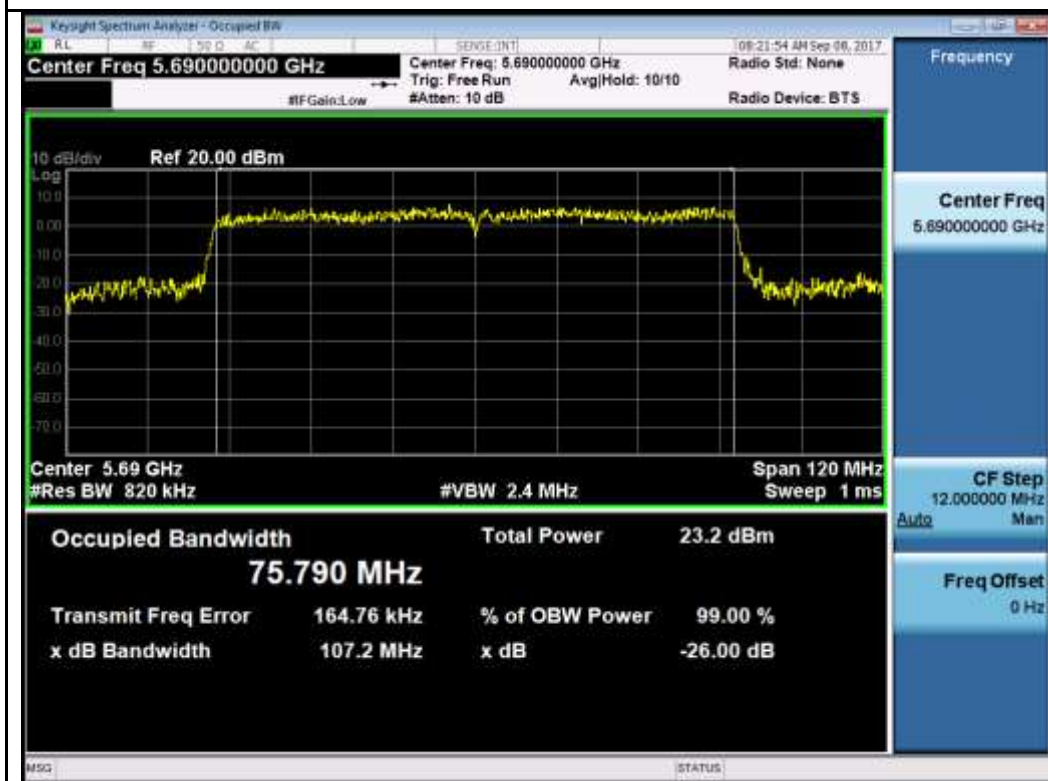

802.11n-HT20-5690MHz

6dB BW Cross Band:




802.11a-5720MHz



802.11n-HT20 5720MHz



802.11n-HT40 5710MHz

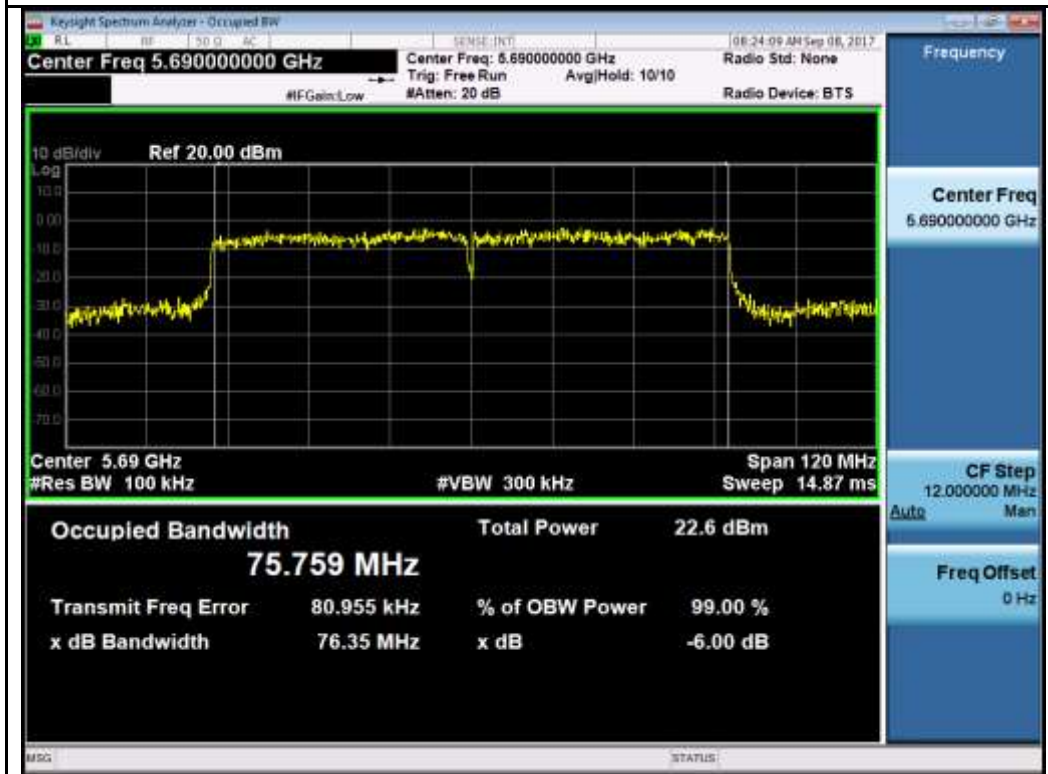


802.11ac-VHT80-5690MHz

10.3 Output Power

Requirement(s):

Spec	Item	Requirement	Applicable
§ 15.407	a)(2)	For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm 10 log B, where B is the 26 dB emission bandwidth in megahertz.	<input checked="" type="checkbox"/>
	a)(3)	For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.	<input checked="" type="checkbox"/>

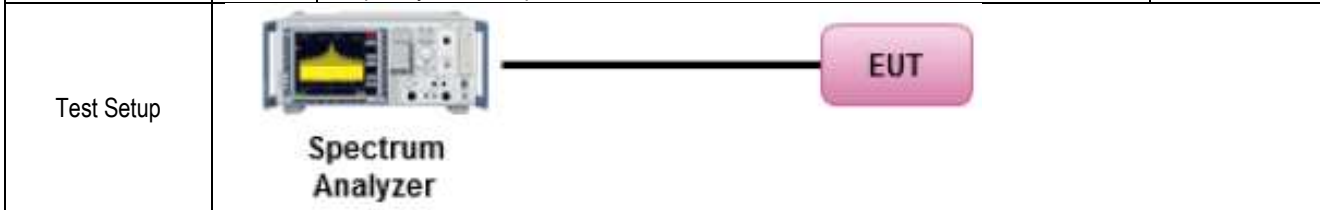

Test Procedure	<p>789033 D02 General UNII Test Procedures New Rules v01r02</p> <p>Measurement using a Spectrum Analyzer or EMI Receiver (SA) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep):</p> <ul style="list-style-type: none"> - Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal. - Set RBW = 1 MHz - Set VBW = 3 MHz - Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.) - Sweep time = auto. - Detector = power averaging (rms), if available. Otherwise, use sample detector mode. - If transmit duty cycle $< 98\%$, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run." - Trace average at least 100 traces in power averaging (rms) mode. - Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum. 		
----------------	--	--	--

Test Date	08/21/2017-10/05/2017	Environmental condition	Temperature 23°C Relative Humidity 44% Atmospheric Pressure 1021mbar
Remark	N/A		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test was done by Cipher at RF test site.

Output Power measurement result for 5.3GHz

Type	Test mode	Freq (MHz)	CH	Conducted Power (dBm)			Limit (dBm)	Result
				Chain0	Chain1	Combined Power		
Output Power	802.11a	5260	Low	21.03	20.83	23.94	24	Pass
	802.11a	5280	Mid	20.50	20.67	23.60	24	Pass
	802.11a	5320	High	18.84	19.25	22.06	24	Pass
	802.11n-20M	5260	Low	20.71	20.83	23.78	24	Pass
	802.11n-20M	5280	Mid	20.65	20.93	23.80	24	Pass
	802.11n-20M	5320	High	18.30	18.38	21.35	24	Pass
	802.11n-40M	5270	Low	20.86	20.77	23.83	24	Pass
	802.11n-40M	5310	Mid	16.43	16.19	19.32	24	Pass
	802.11ac-80M	5290	High	14.28	16.00	18.24	24	Pass

Output Power measurement result for 5.5GHz

Type	Test mode	Freq (MHz)	CH	Conducted Power (dBm)			Limit (dBm)	Result
				Chain0	Chain1	Combined Power		
Output Power	802.11a	5500	Low	19.76	20.13	22.96	24	Pass
	802.11a	5580	Mid	20.18	20.65	23.43	24	Pass
	802.11a	5700	High	20.72	20.27	23.51	24	Pass
	802.11n-20M	5500	Low	20.18	20.04	23.12	24	Pass
	802.11n-20M	5580	Mid	20.25	20.86	23.57	24	Pass
	802.11n-20M	5700	High	20.45	20.61	23.54	24	Pass
	802.11n-40M	5510	Low	16.36	17.12	19.77	24	Pass
	802.11n-40M	5550	Mid	20.92	20.53	23.74	24	Pass
	802.11n-40M	5670	High	20.93	20.94	23.95	24	Pass
	802.11ac-80M	5530	Low	16.00	15.44	18.74	24	Pass
	802.11ac-80M	5610	High	17.71	20.99	22.66	24	Pass

Note: Two chains are cross-polarized, additional gain is $10 \log_{10}(\text{NANT})=0\text{dB}$, $N=1$, max directional gain of the EUT is 3.5dBi. No limit adjustment is needed. All the mode transmission is MIMO.

Output Power measurement result for CROSS channels (in band 5470-5725MHz)

Type	Test mode	Freq (MHz)	CH	Conducted Power (dBm)			Limit (dBm)	Result
				Chain0	Chain1	Combined Power		
	802.11a	5720	CROSS	19.67	19.26	22.48	24	Pass
	802.11n-20M	5720	CROSS	19.36	19.03	22.21	24	Pass
	802.11n-40M	5710	CROSS	19.90	19.82	22.87	24	Pass
	802.11ac-80M	5690	CROSS	18.31	19.99	22.24	24	Pass


Output Power measurement result for CROSS channels (in band 5725-5850MHz)

Type	Test mode	Freq (MHz)	CH	Conducted Power (dBm)			Limit (dBm)	Result
				Chain0	Chain1	Combined Power		
Output Power	802.11a	5720	CROSS	19.67	19.26	22.48	30	Pass
	802.11n-20M	5720	CROSS	19.36	19.03	22.21	30	Pass
	802.11n-40M	5710	CROSS	19.90	19.82	22.87	30	Pass
	802.11ac-80M	5690	CROSS	18.31	19.99	22.24	30	Pass


Note: Two chains are cross-polarized, additional gain is $10 \log_{10}(NANT)=0\text{dB}$, $N=1$, max directional gain of the EUT is 3.5dBi. No limit adjustment is needed. All the mode transmission is MIMO.

Test Plot for W53:


Chain 0:

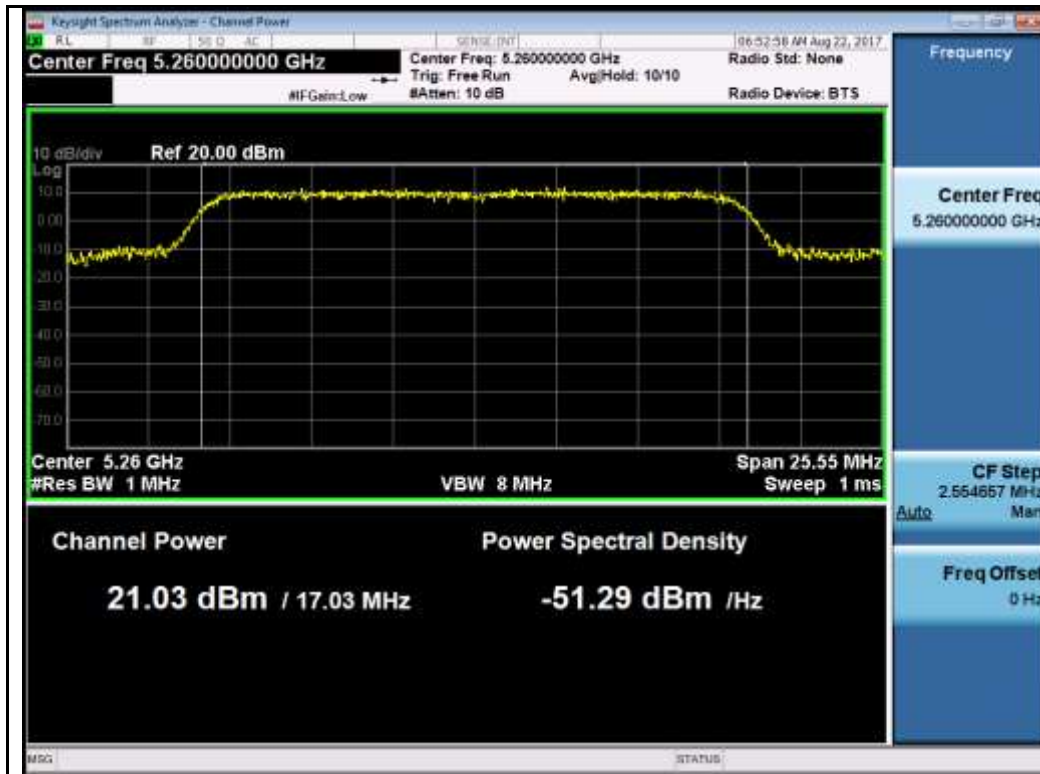


802.11a-5260M

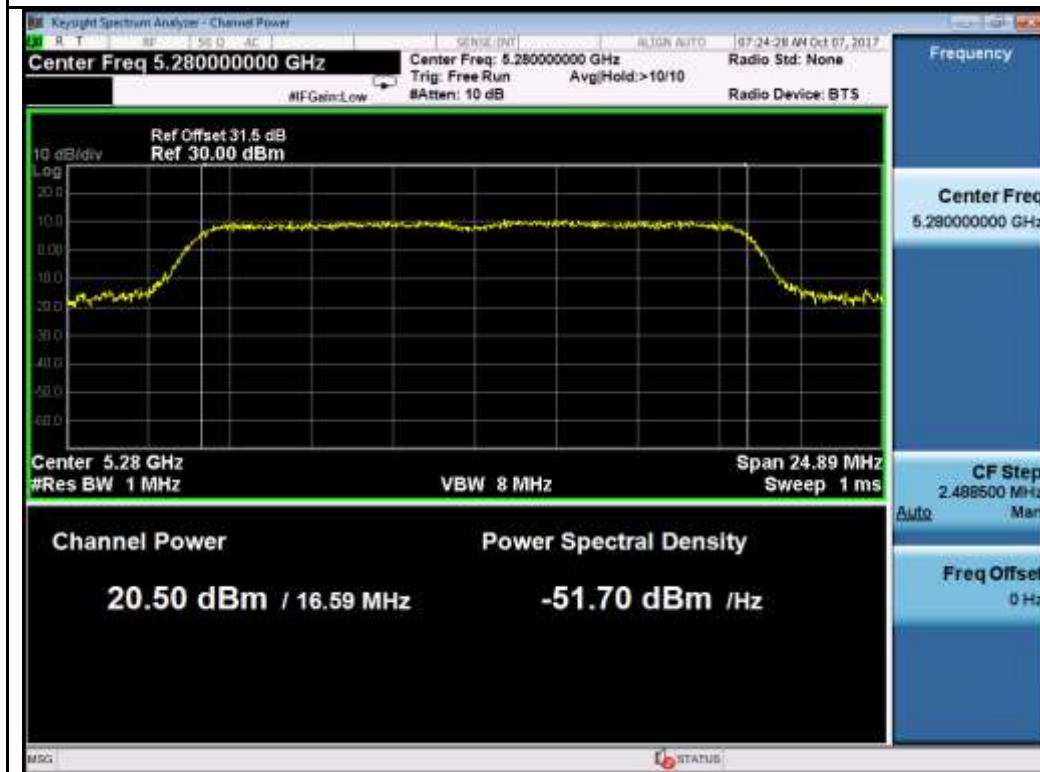


802.11a-5280M

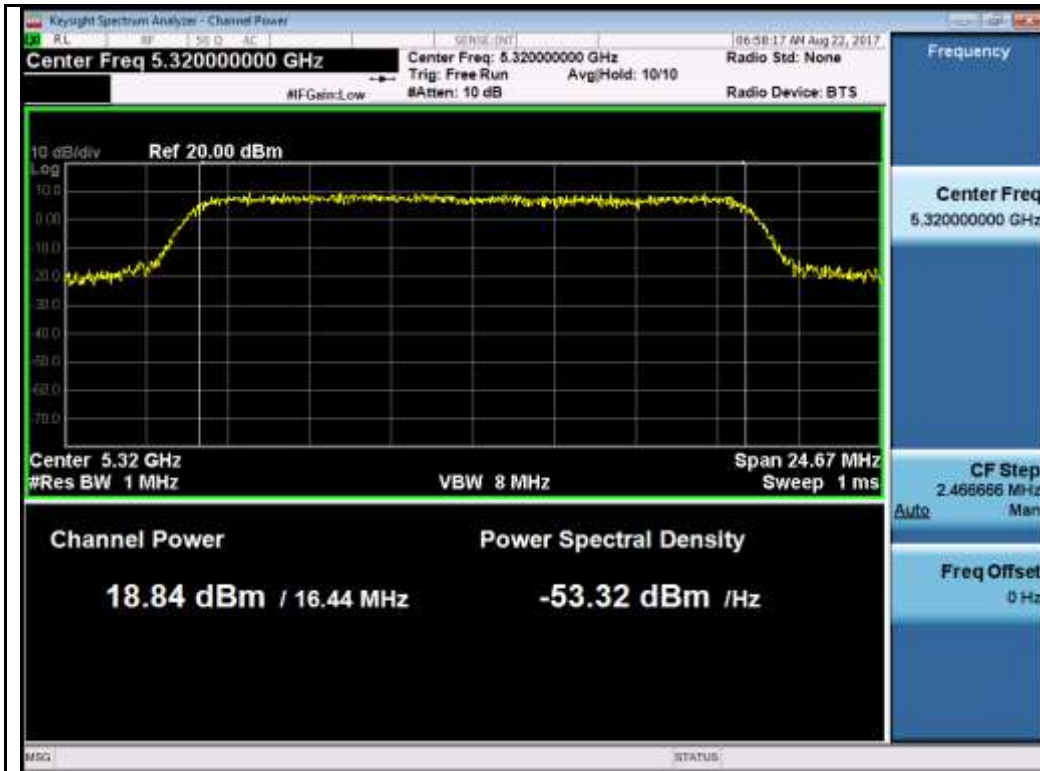


802.11a-5320M

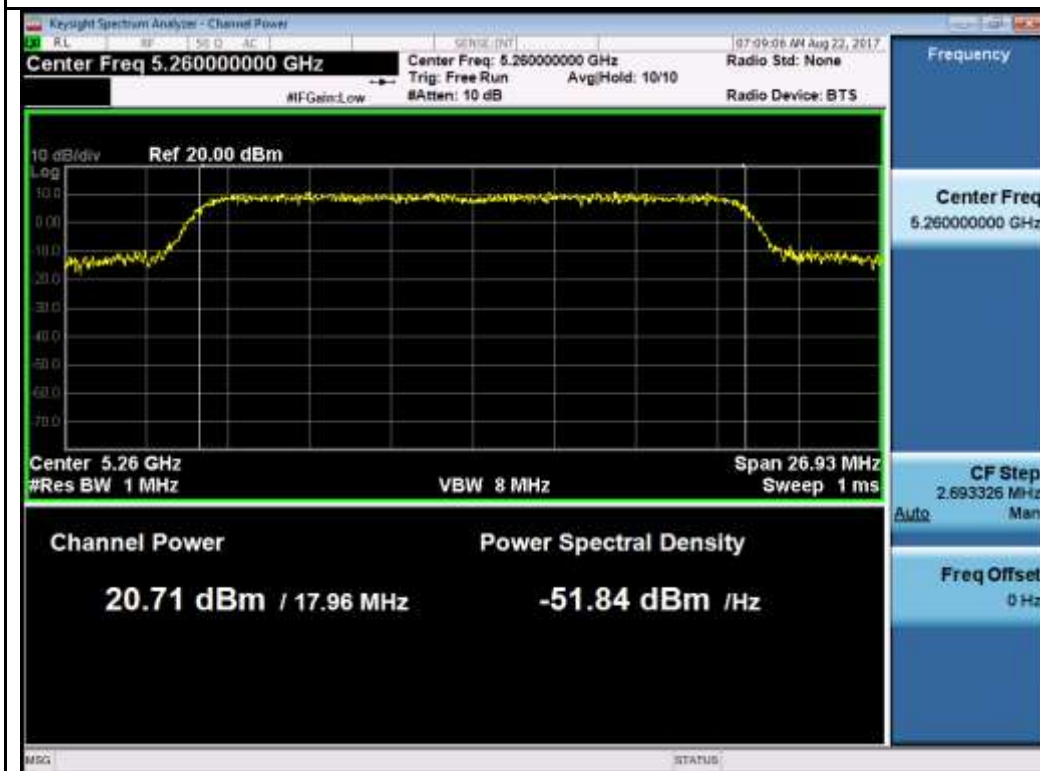


802.11n-HT20 5260M

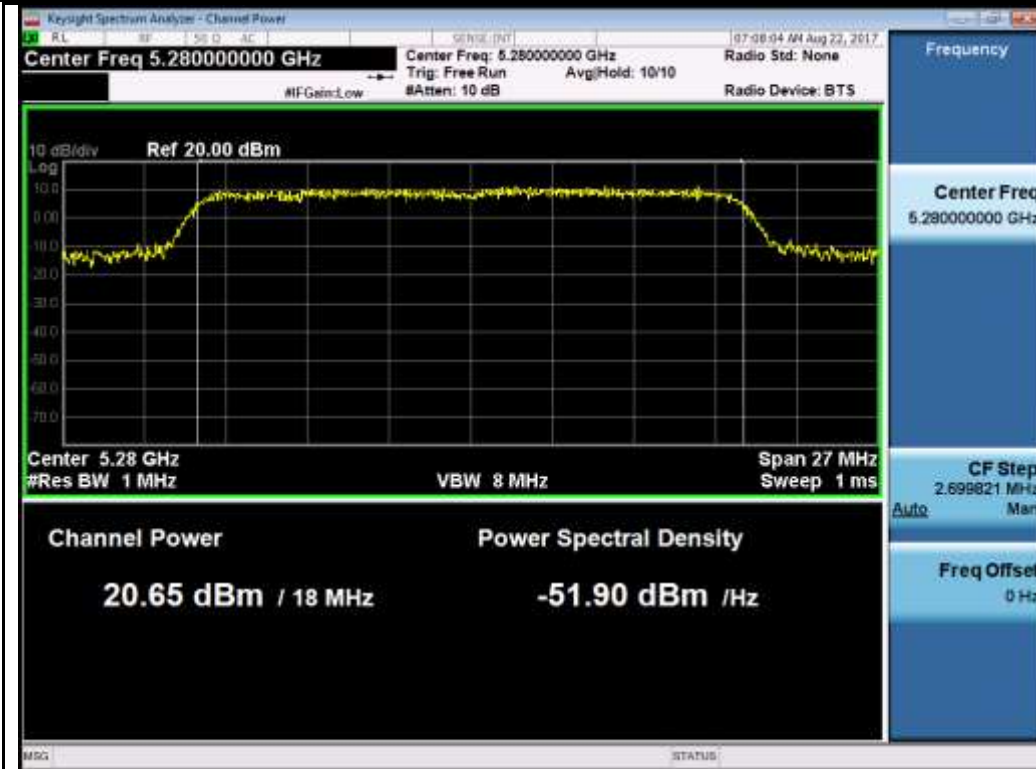


802.11n-HT20 5280M

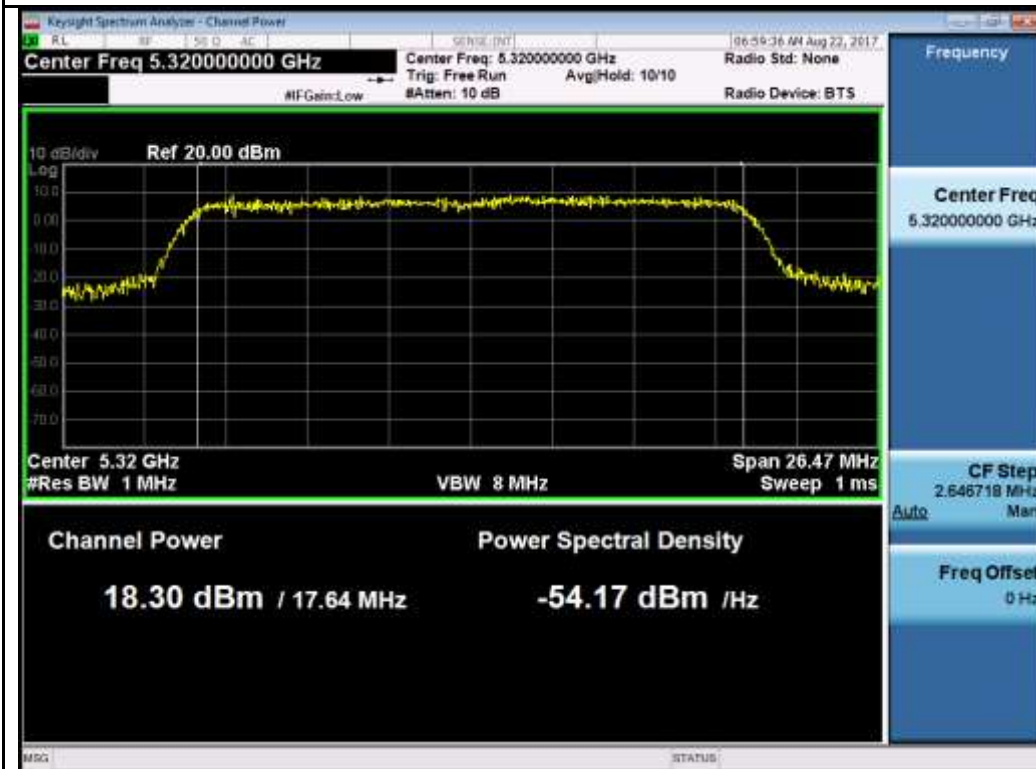

802.11n-HT20 5320M

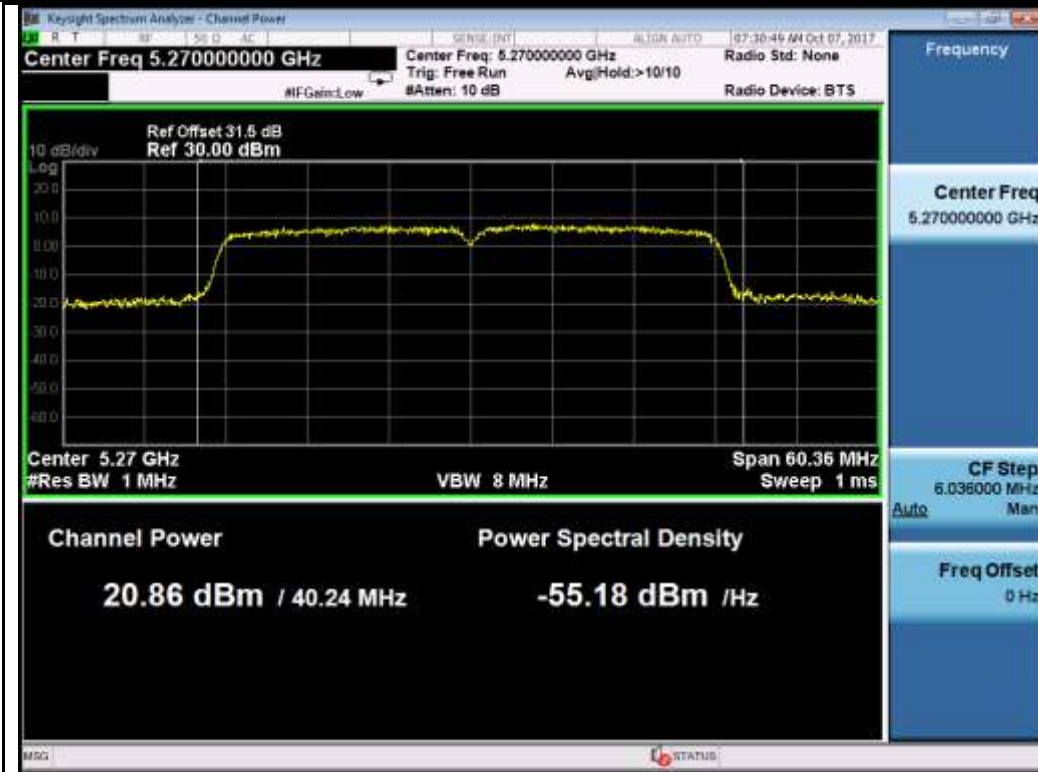


802.11n-HT40 5270M

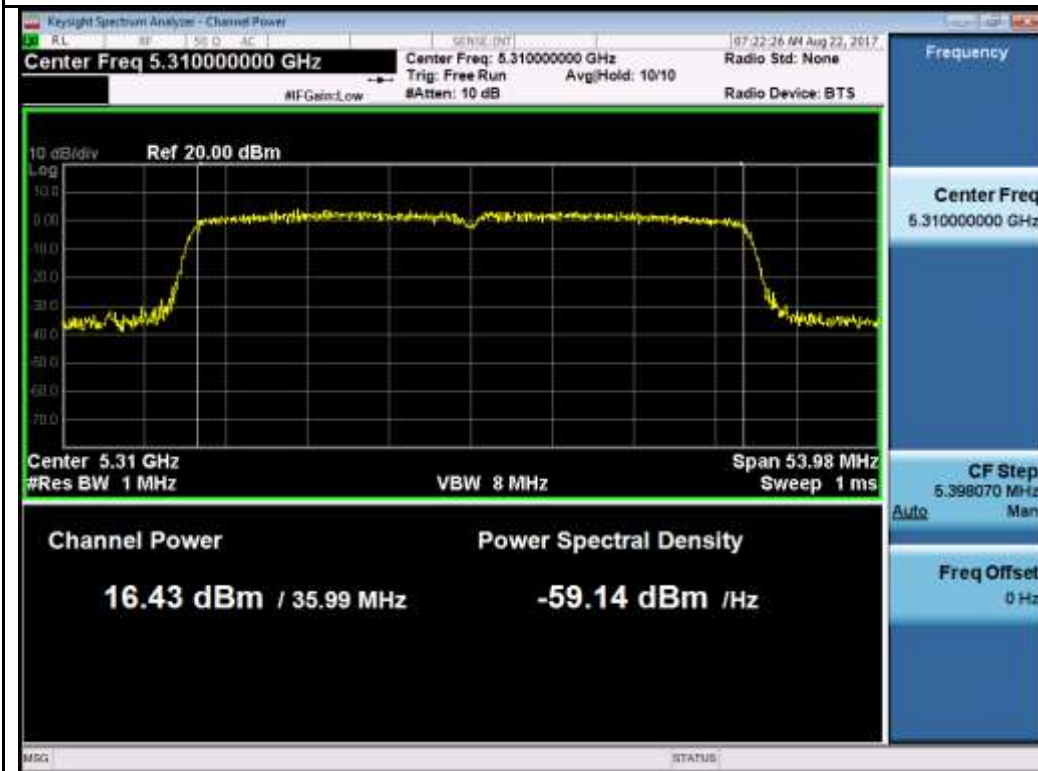

802.11n-HT40 5310M




Chain 1:

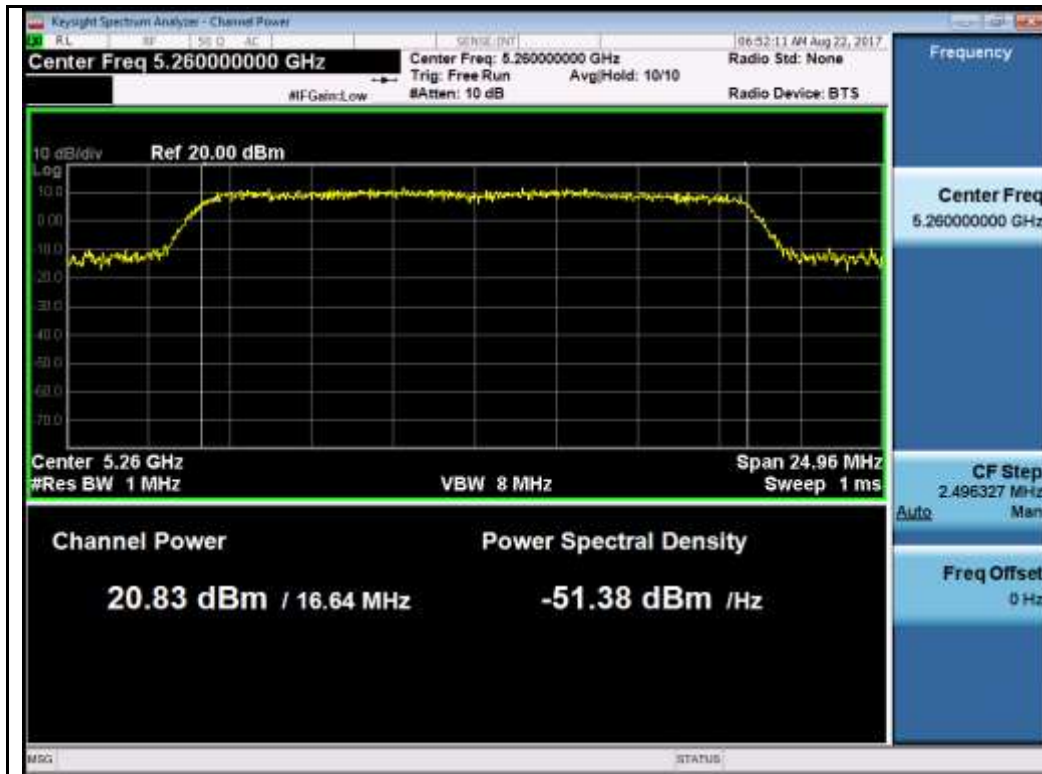


802.11a-5260M




802.11a-5280M

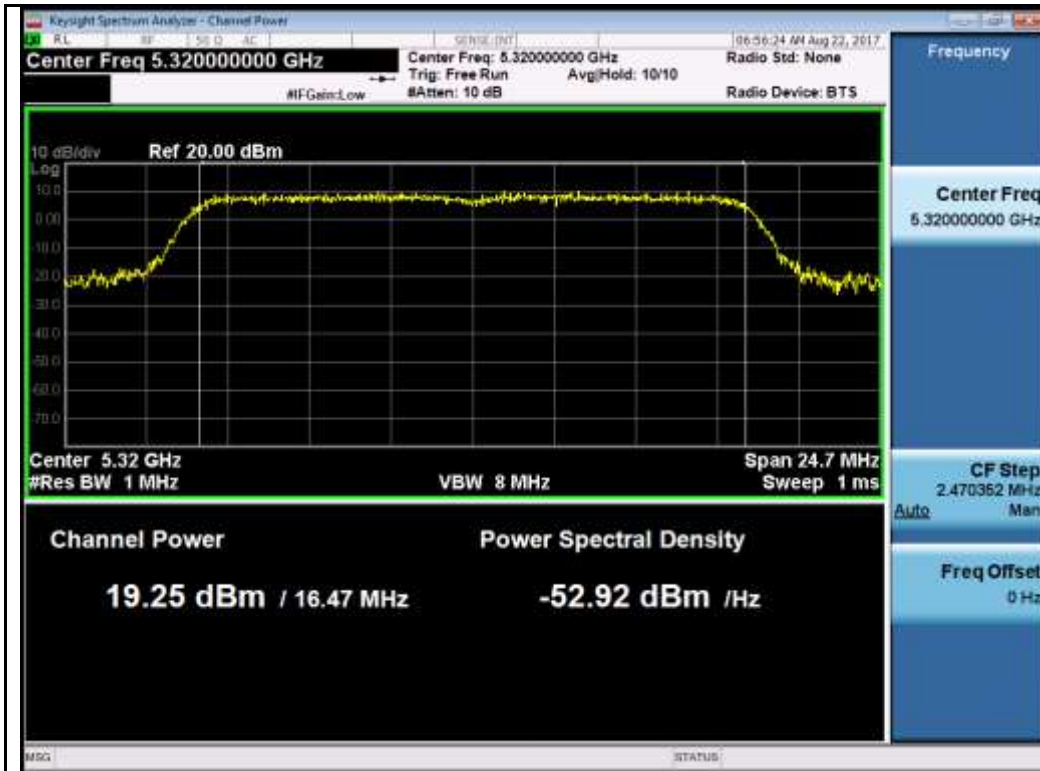


802.11a-5320M

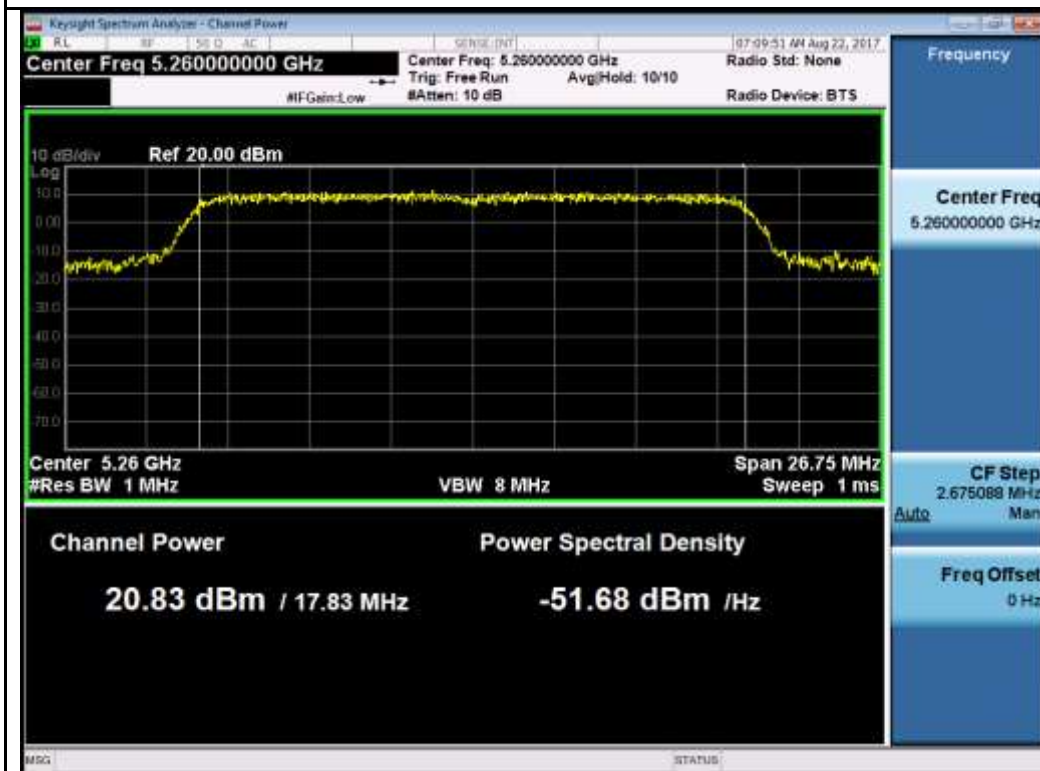


802.11n-HT20 5260M

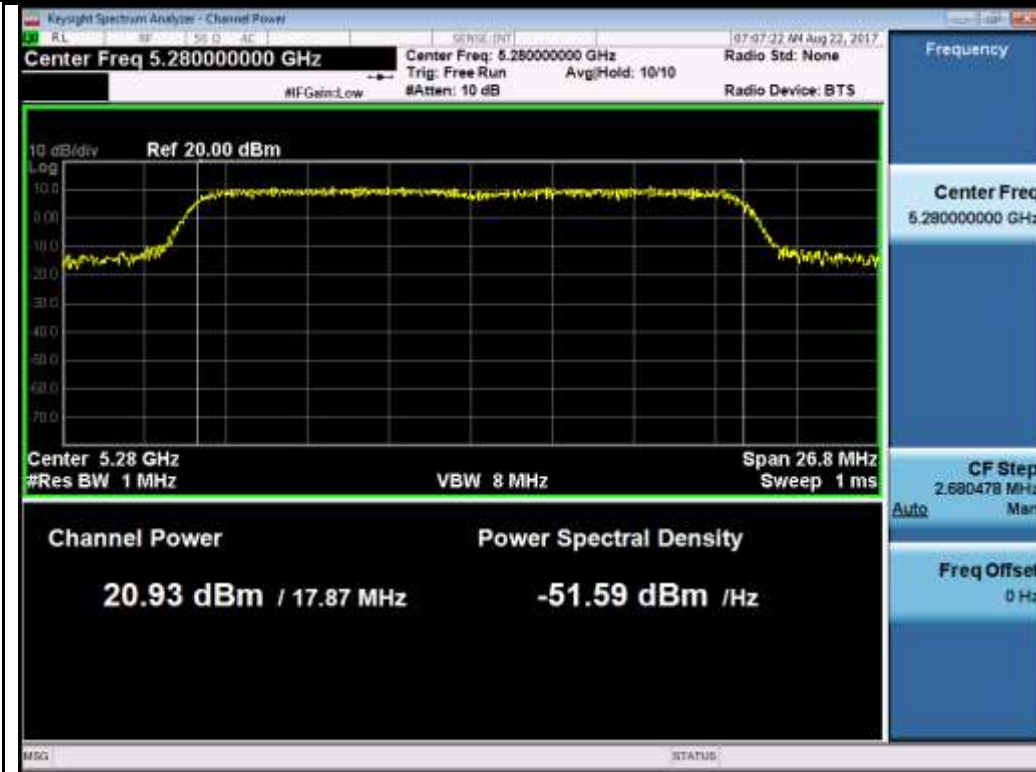


802.11n-HT20 5280M

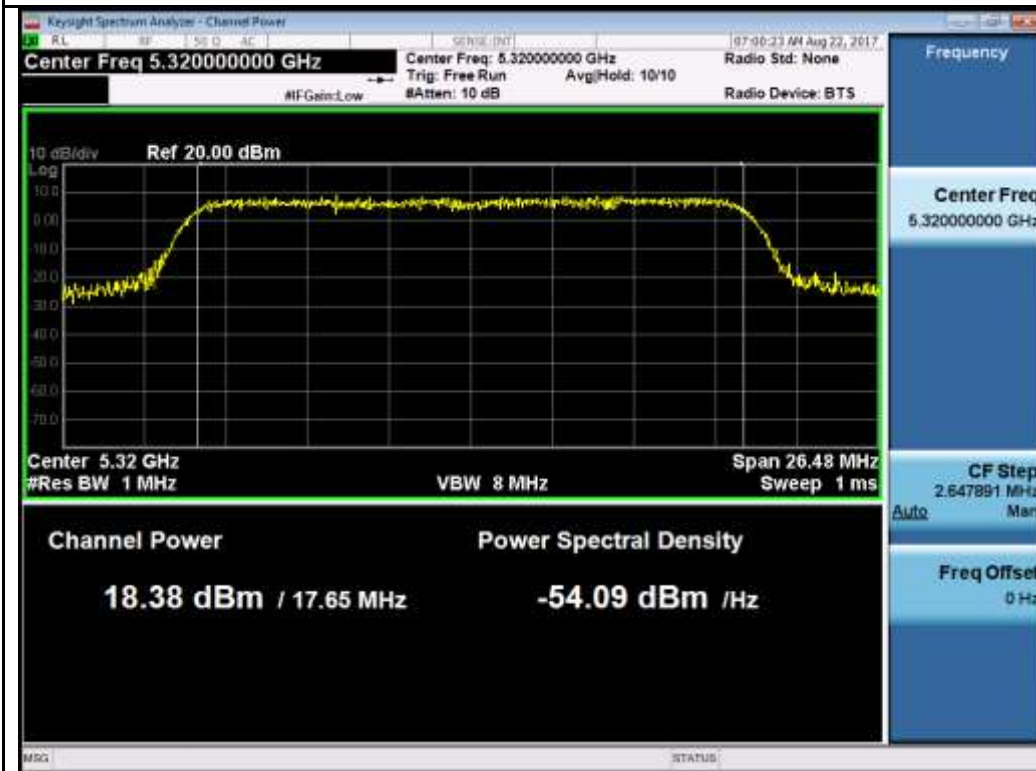


802.11n-HT20 5320M

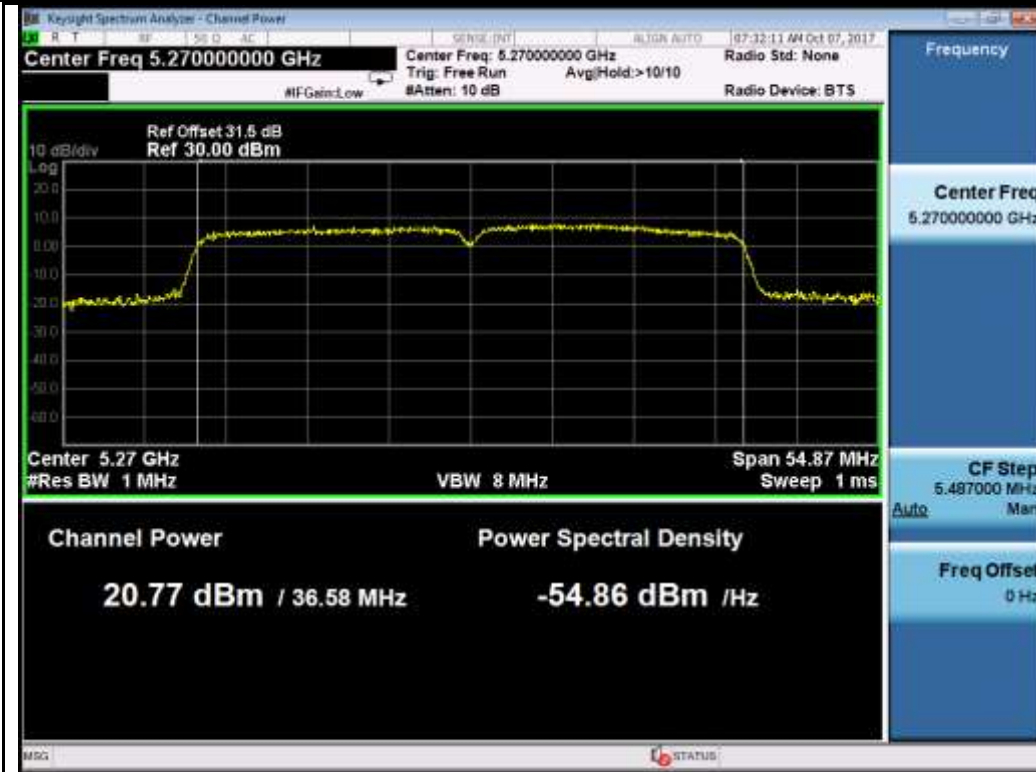

802.11n-HT40 5270M

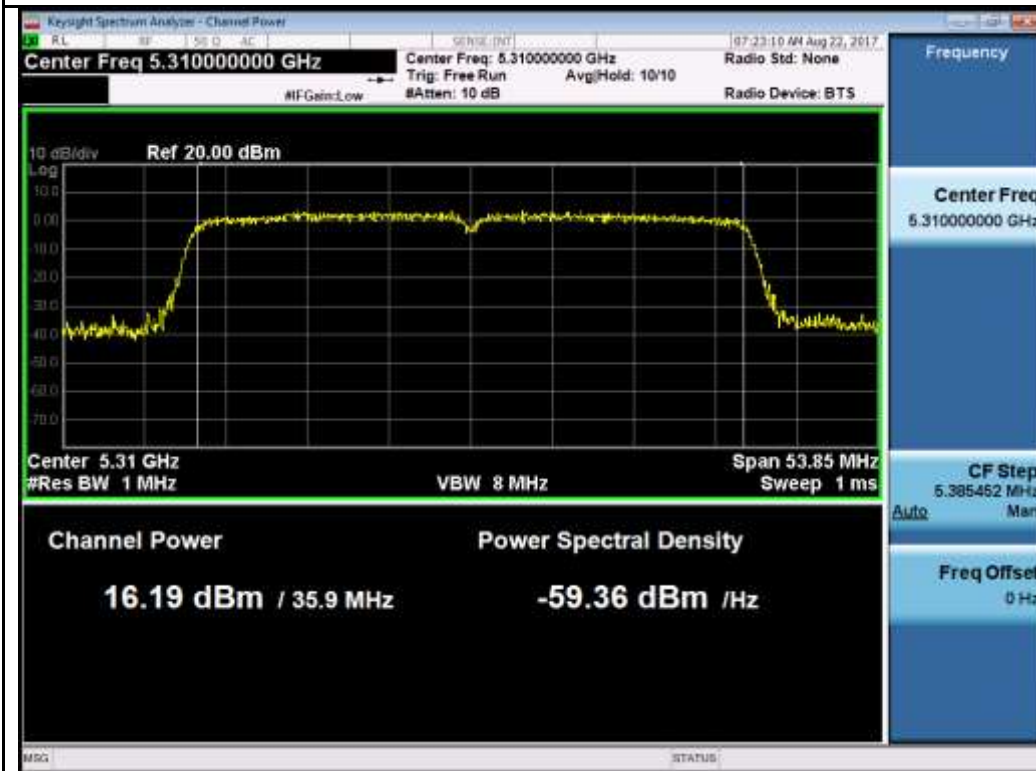


802.11n-HT40 5310M

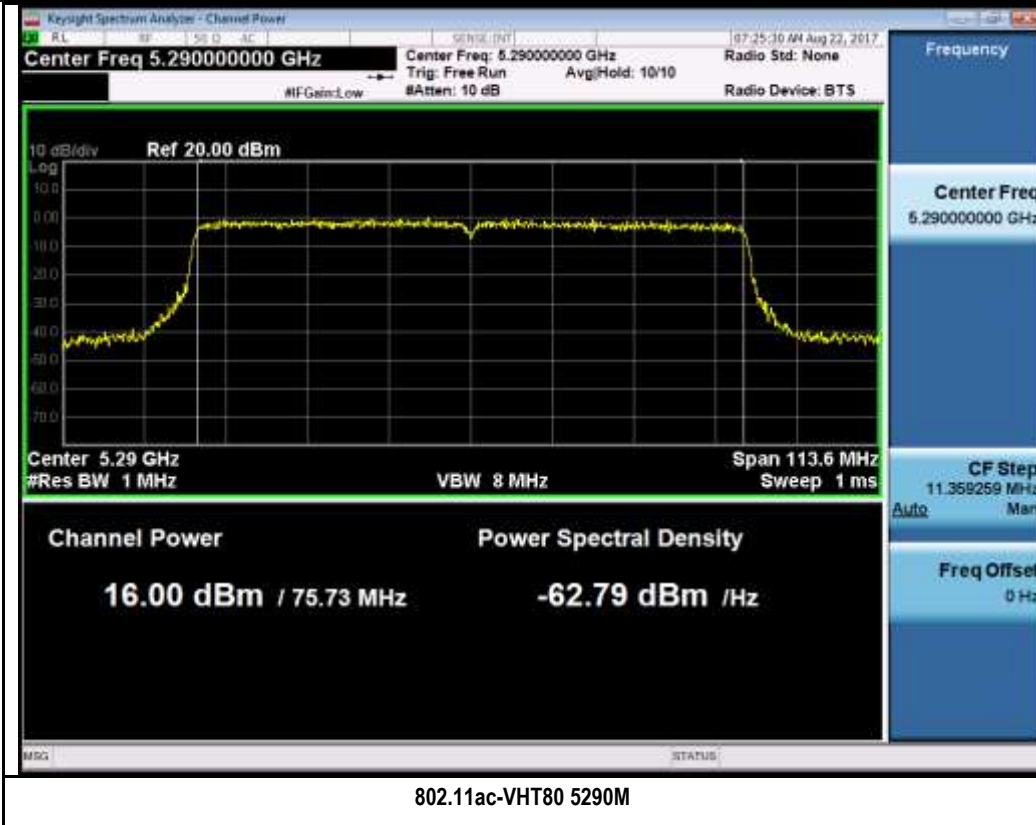


Test Plot for W56:


Chain 0:

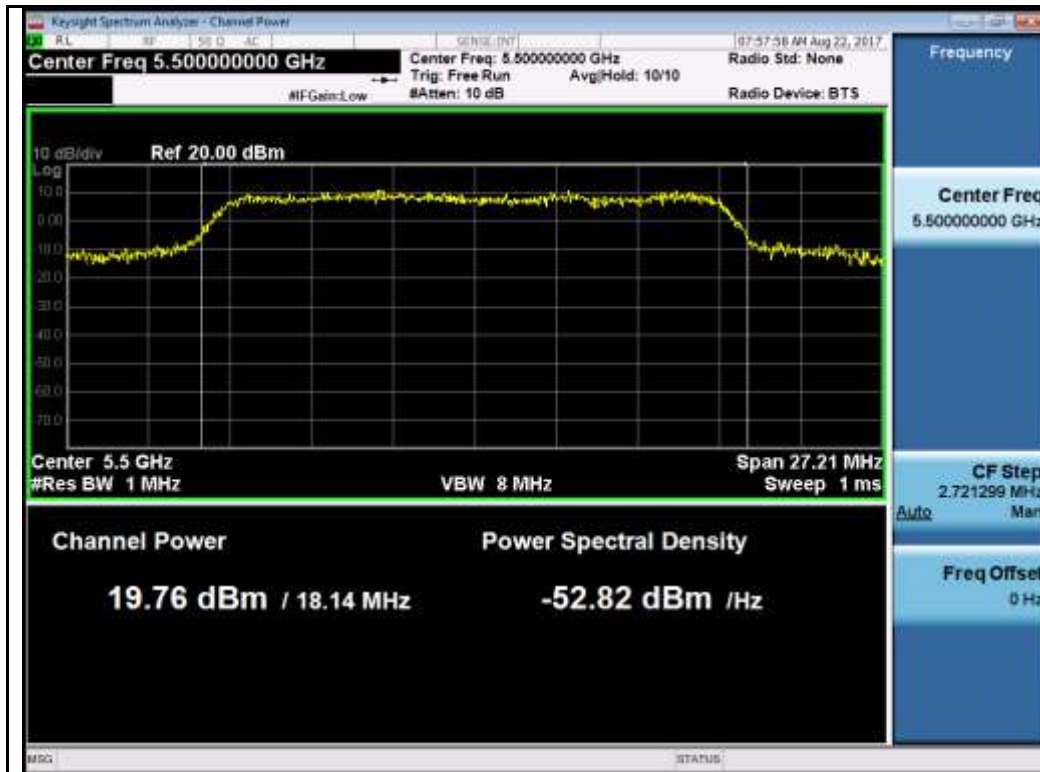


802.11a-5500M

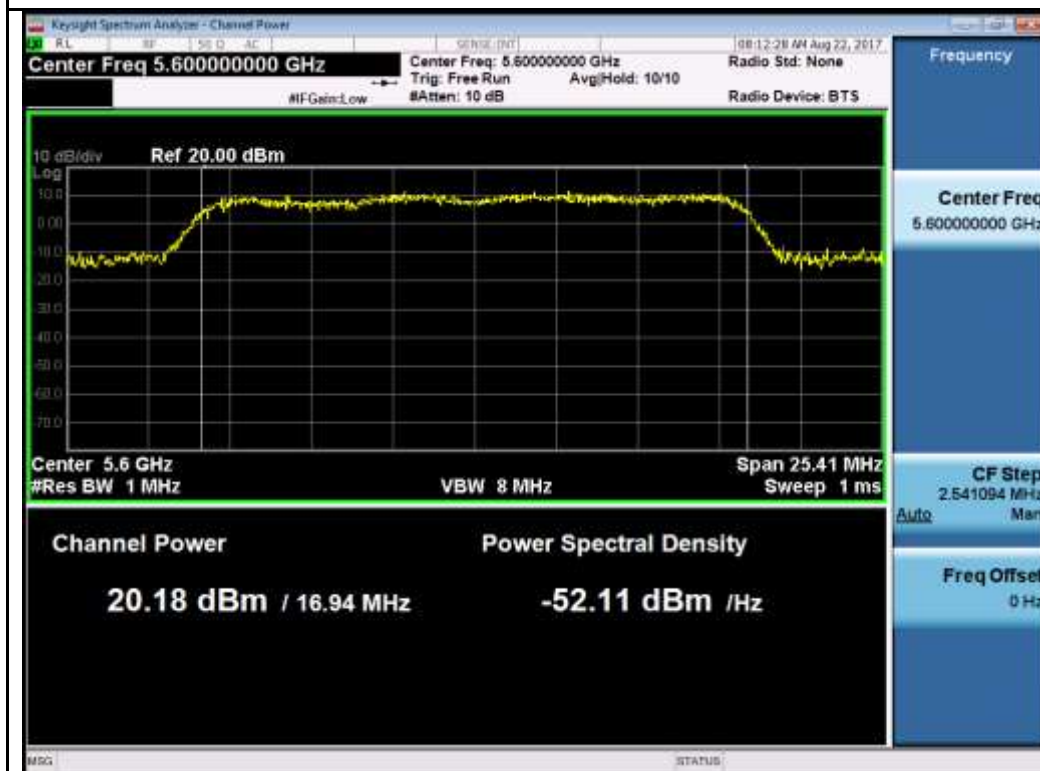


802.11a-5580M

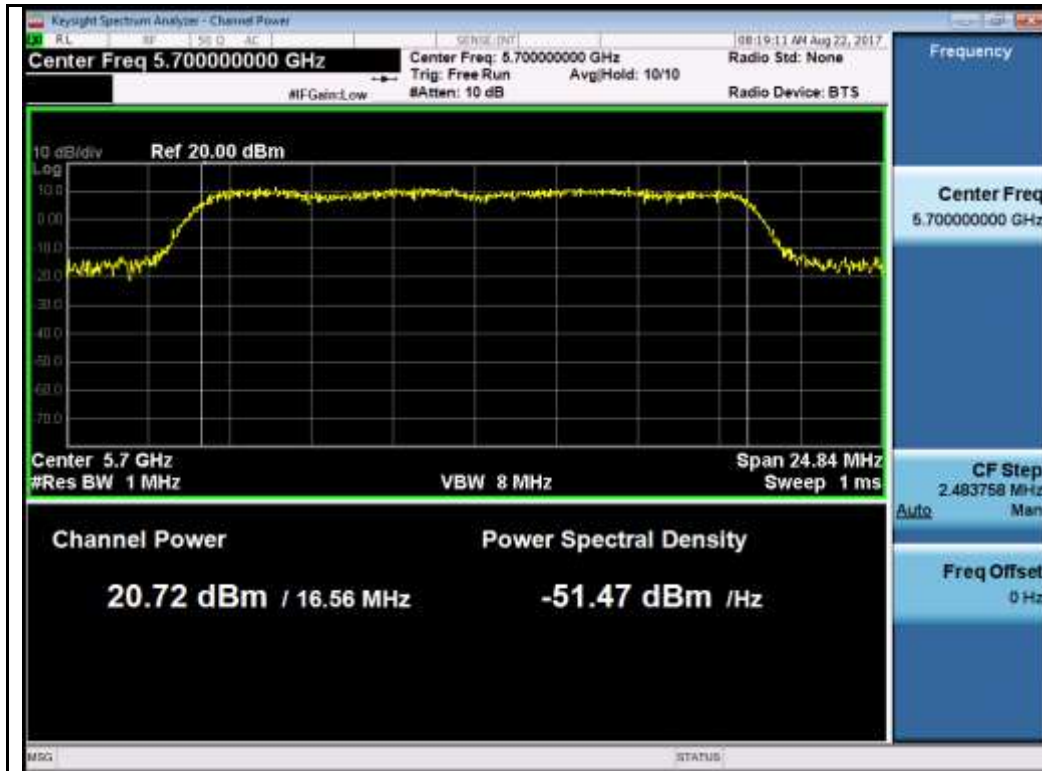


802.11a-5700M

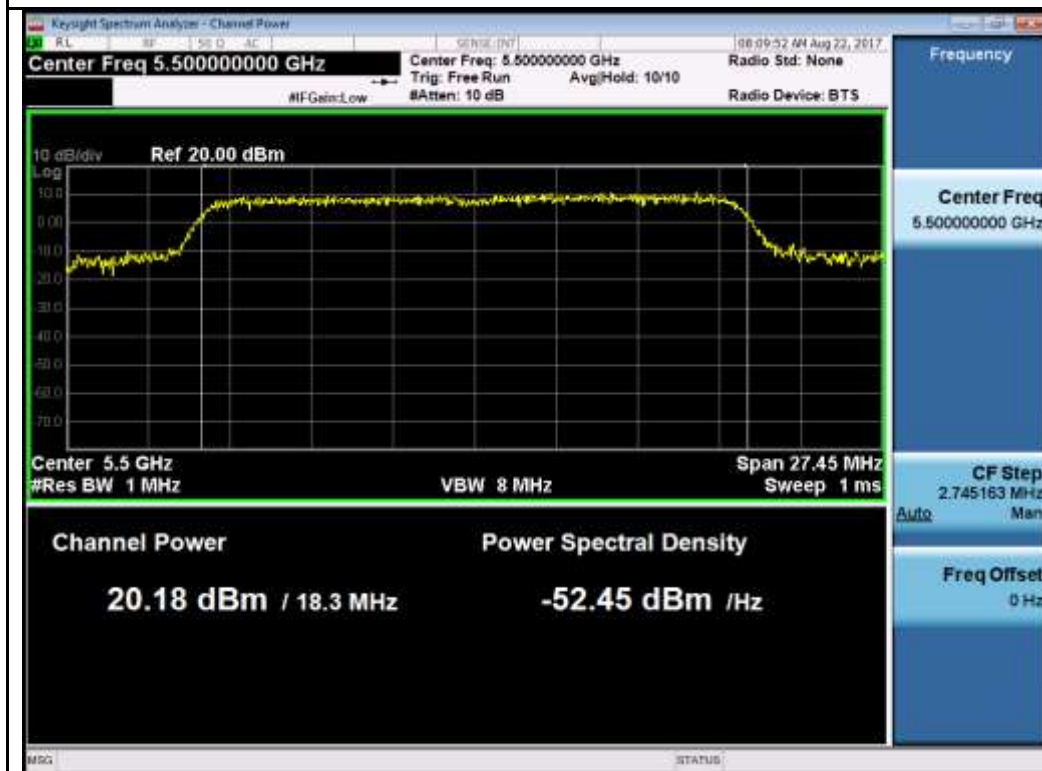


802.11n-HT20 5500M

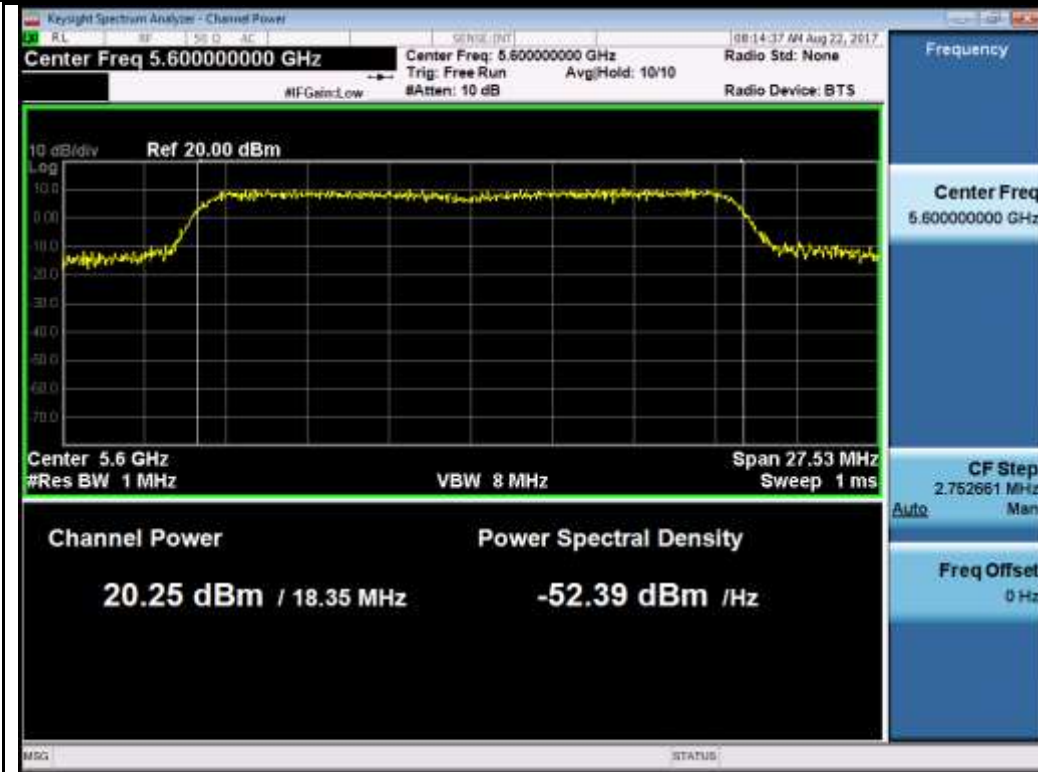


802.11n-HT20 5580M

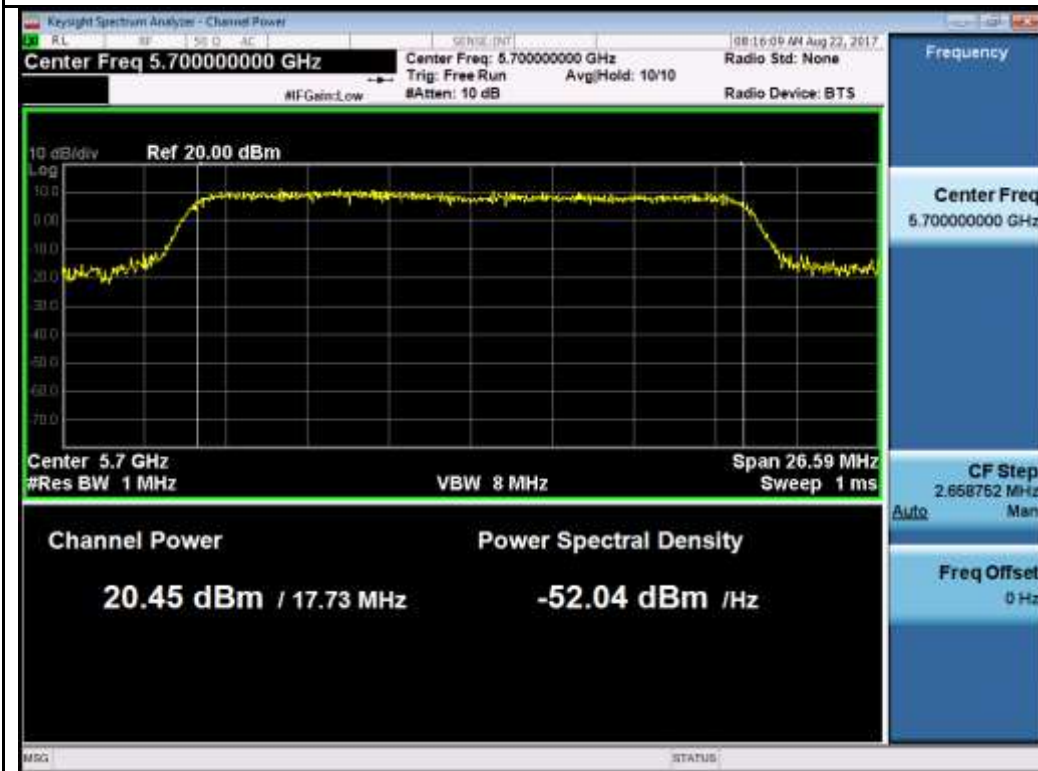



802.11n-HT20 5700M

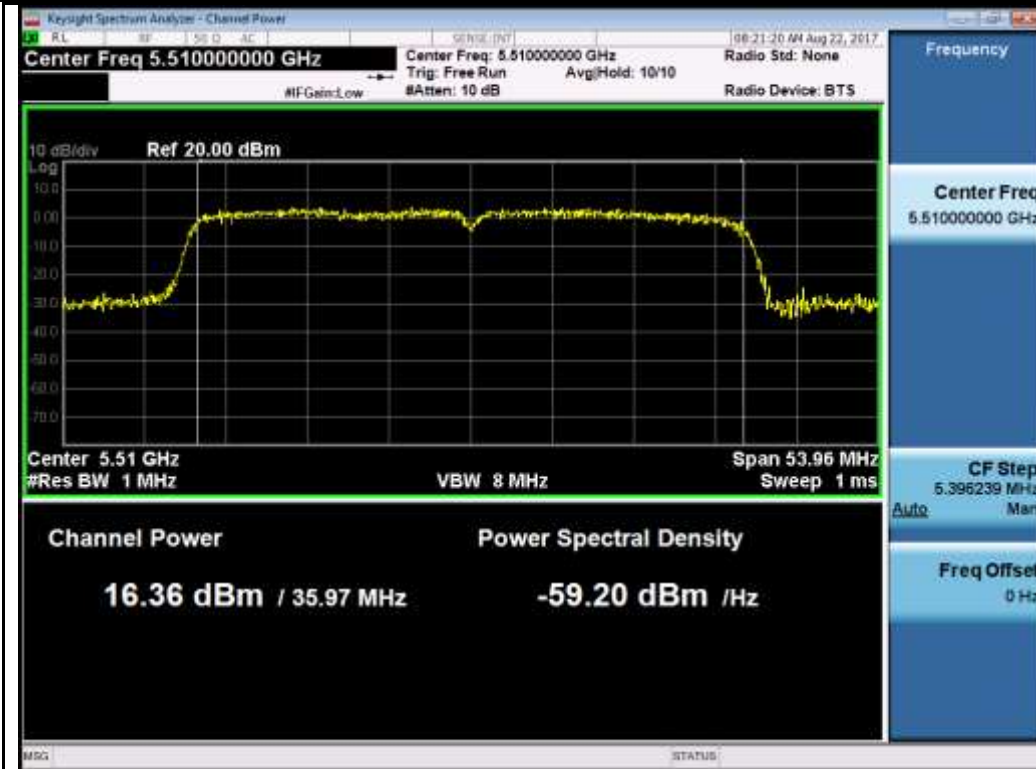

802.11n-HT40 5510M

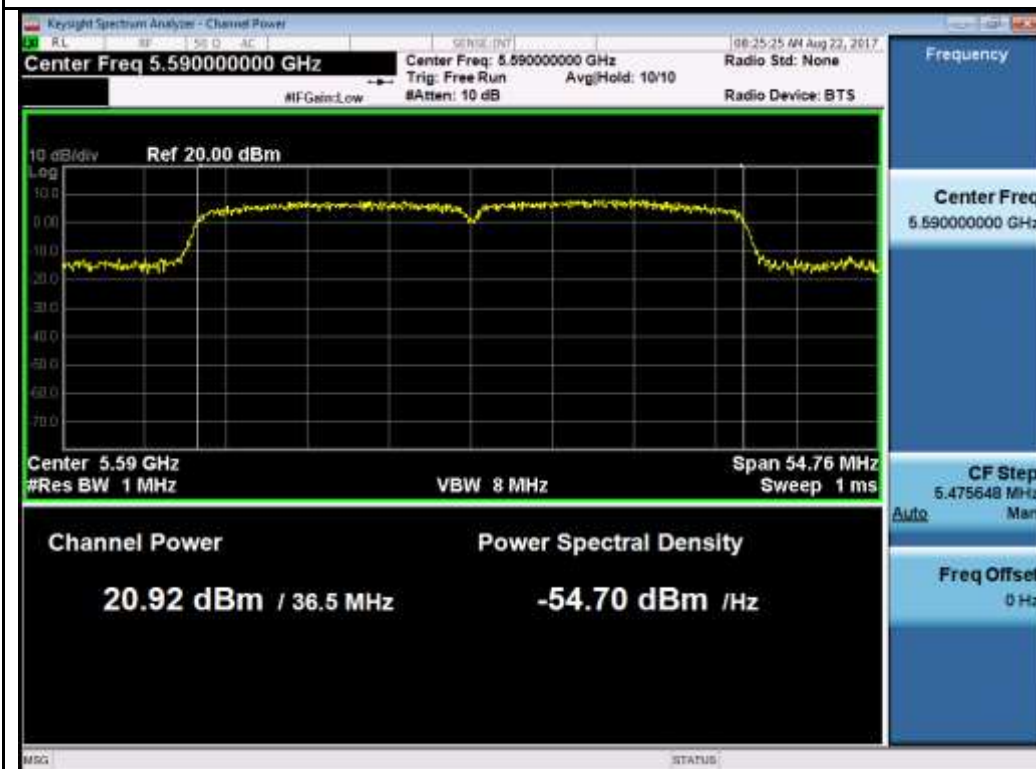



802.11n-HT40 5550M

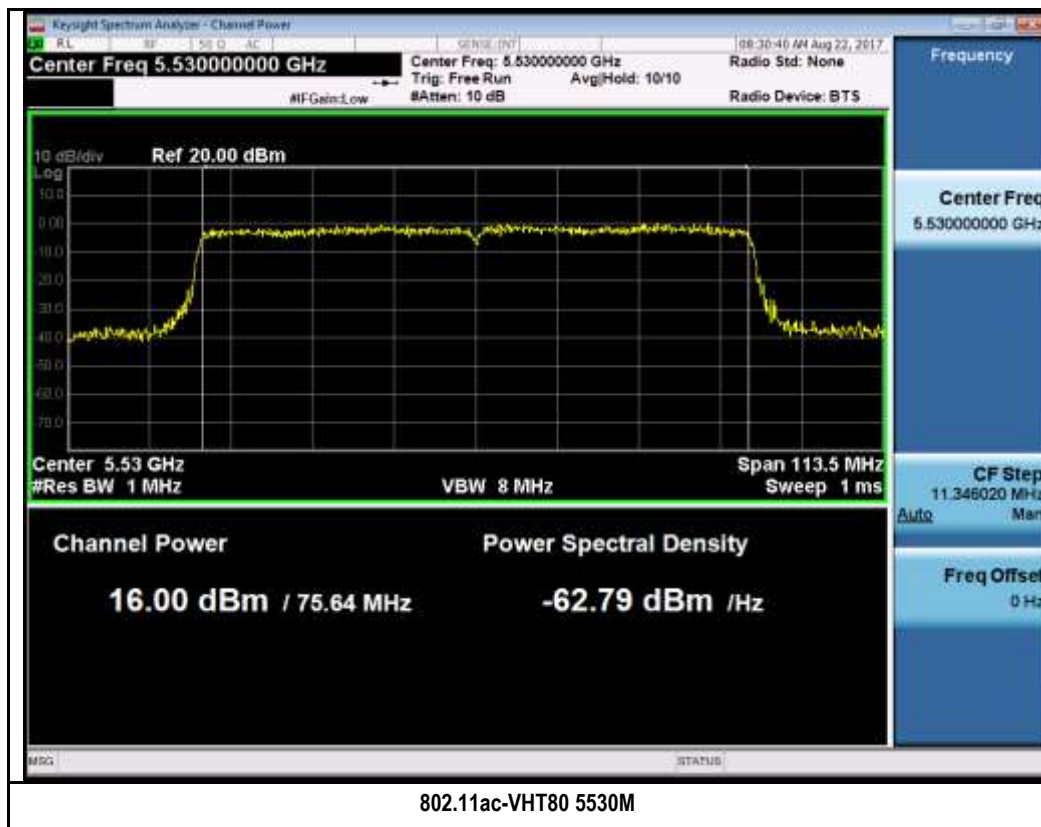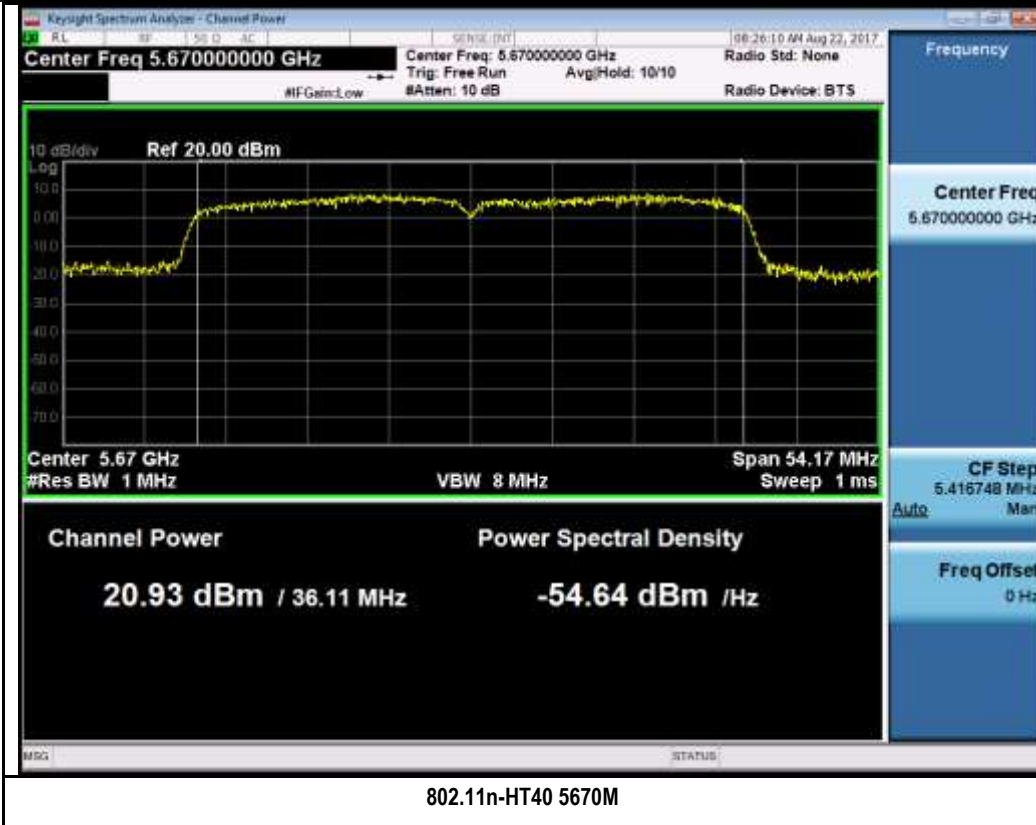







Chain 1:

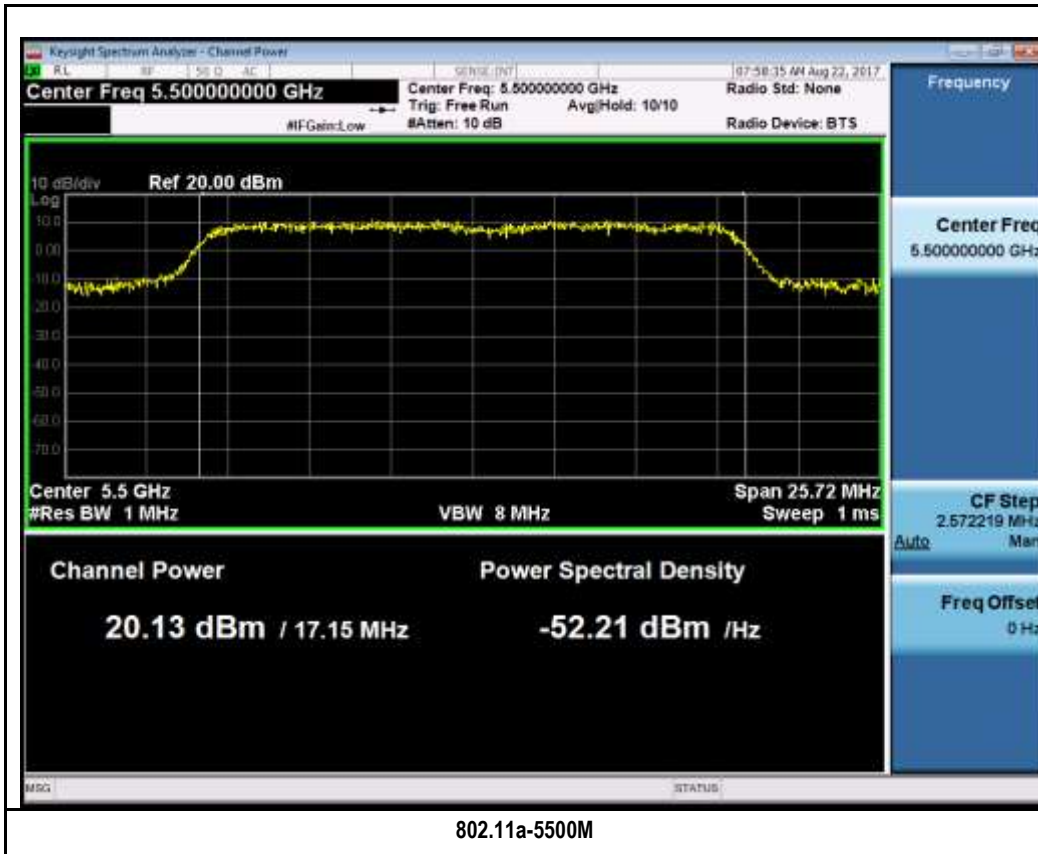

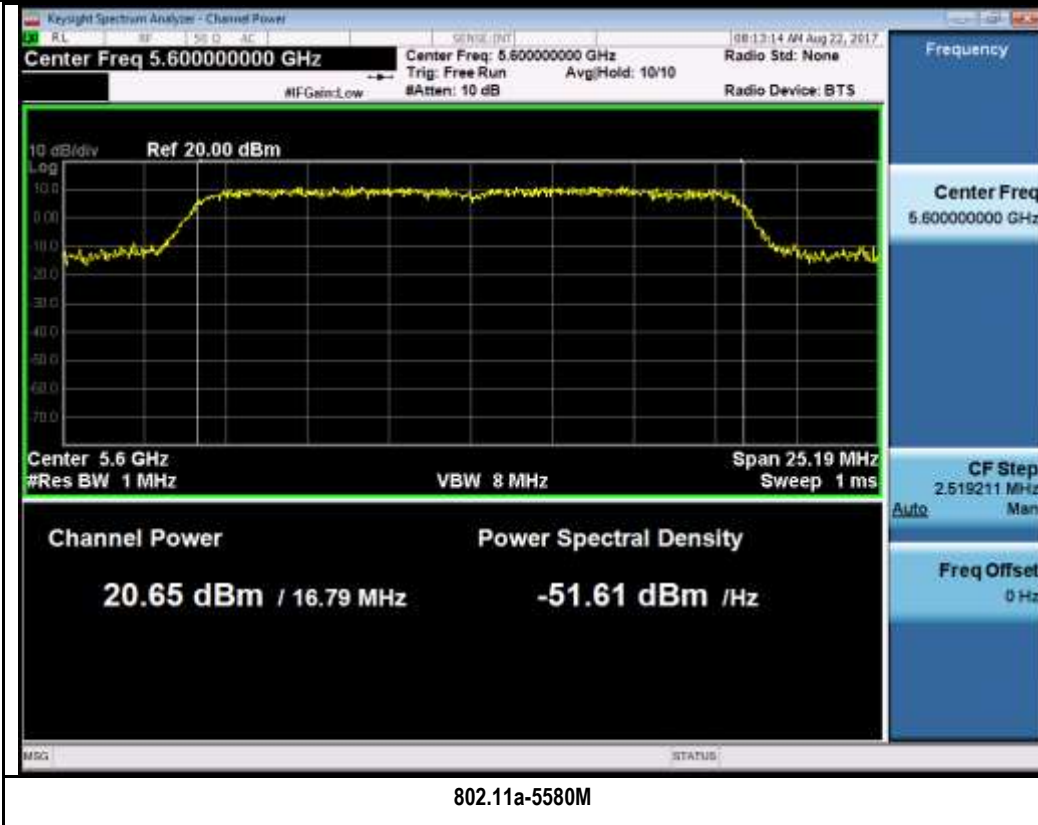


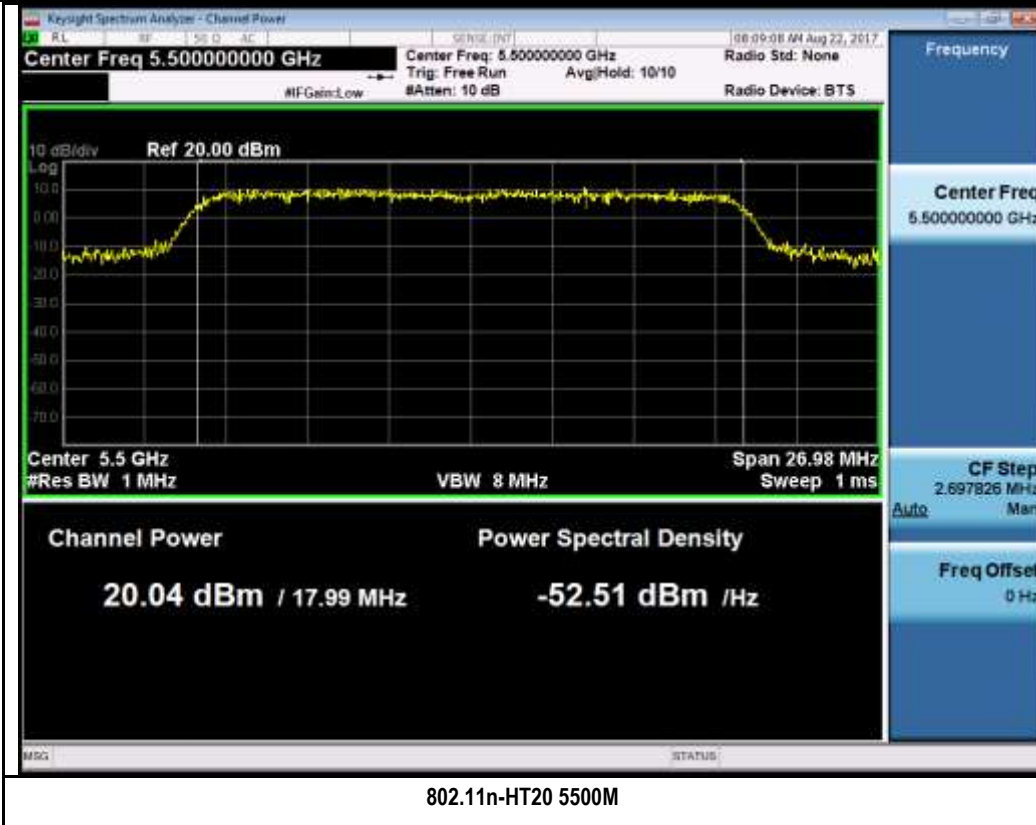

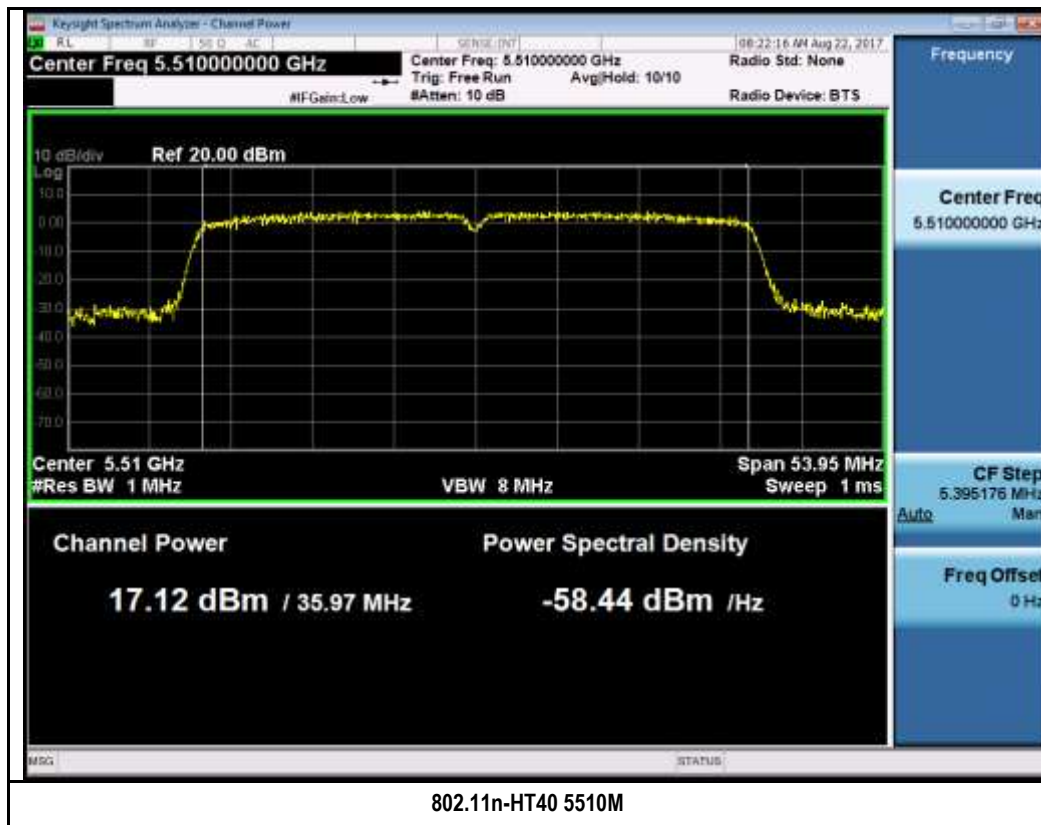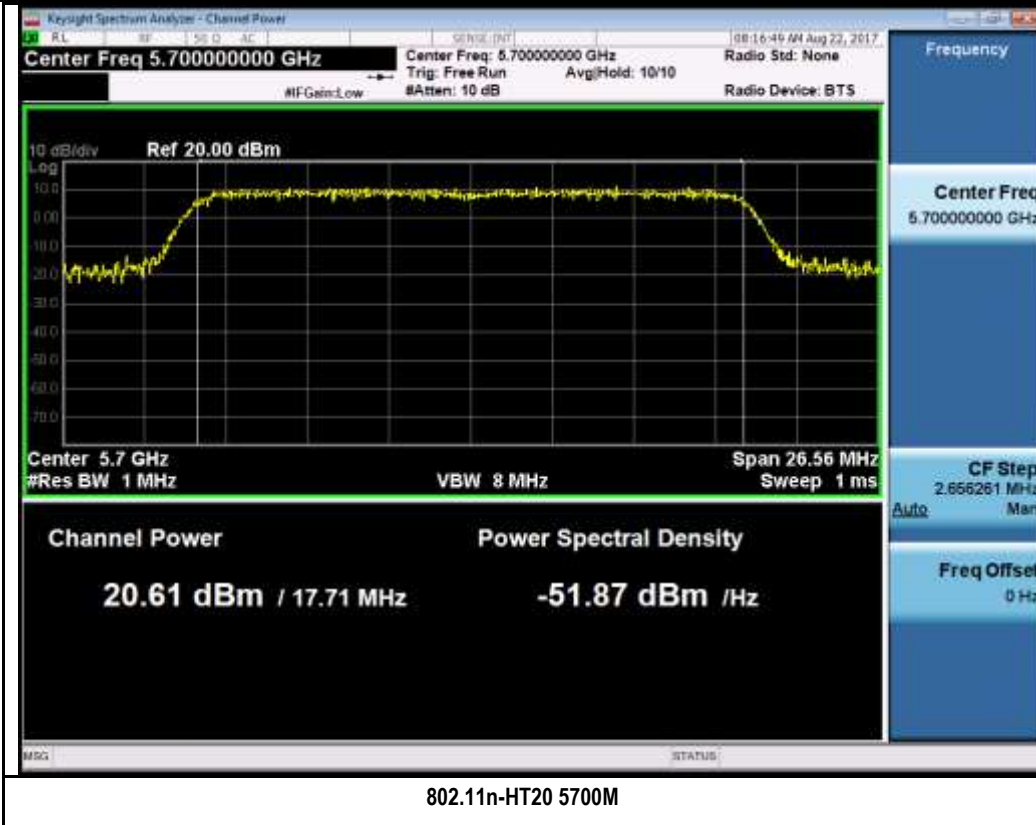


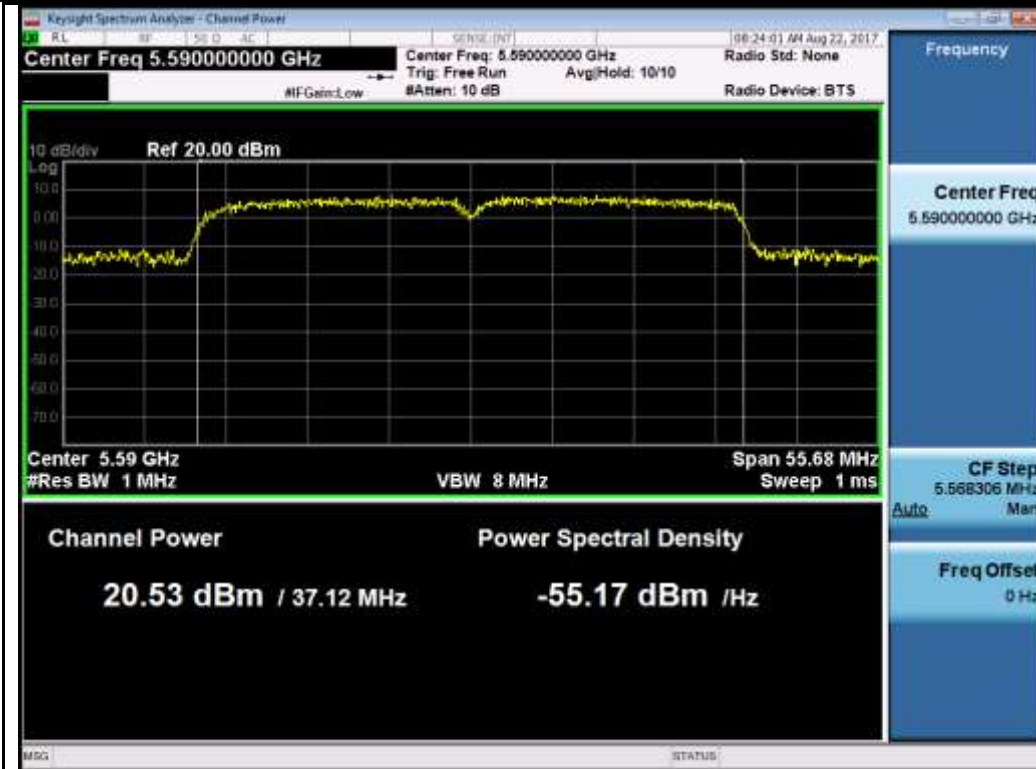


802.11n-HT40 5550M

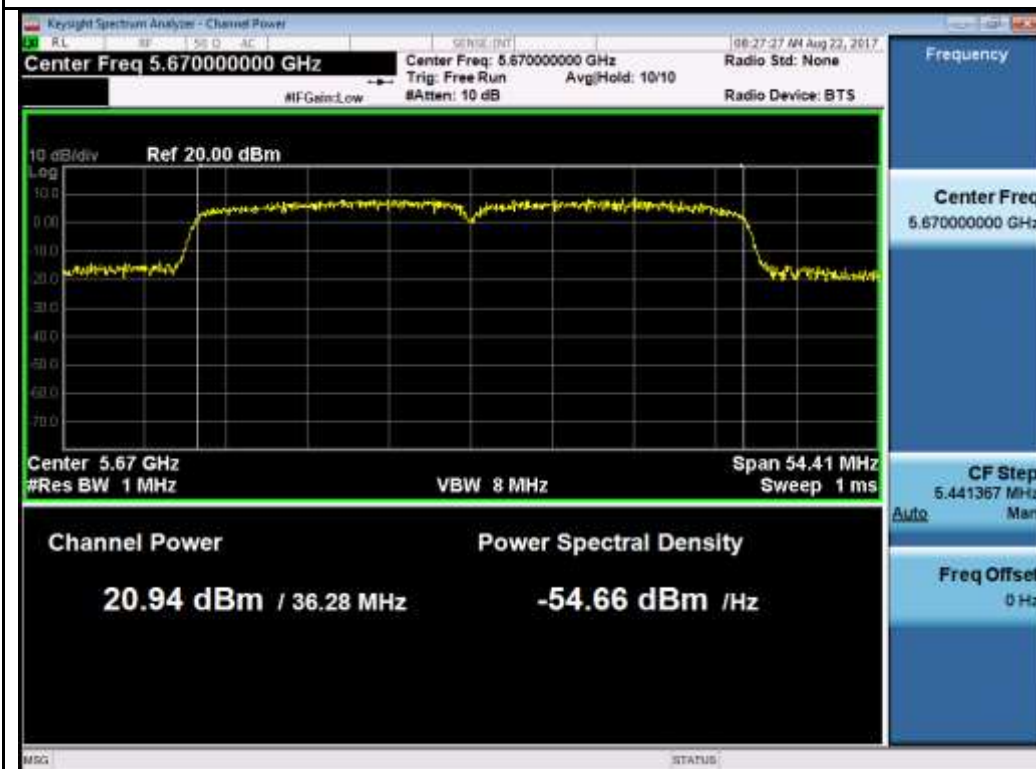

802.11n-HT40 5670M

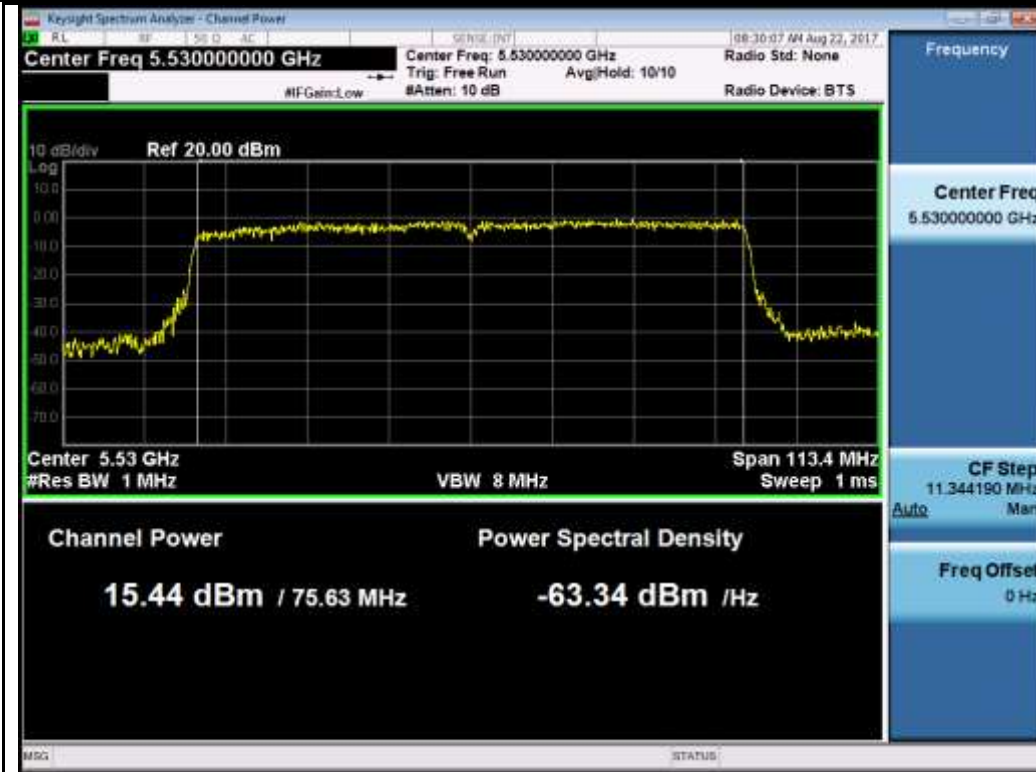

802.11ac-VHT80 5530M

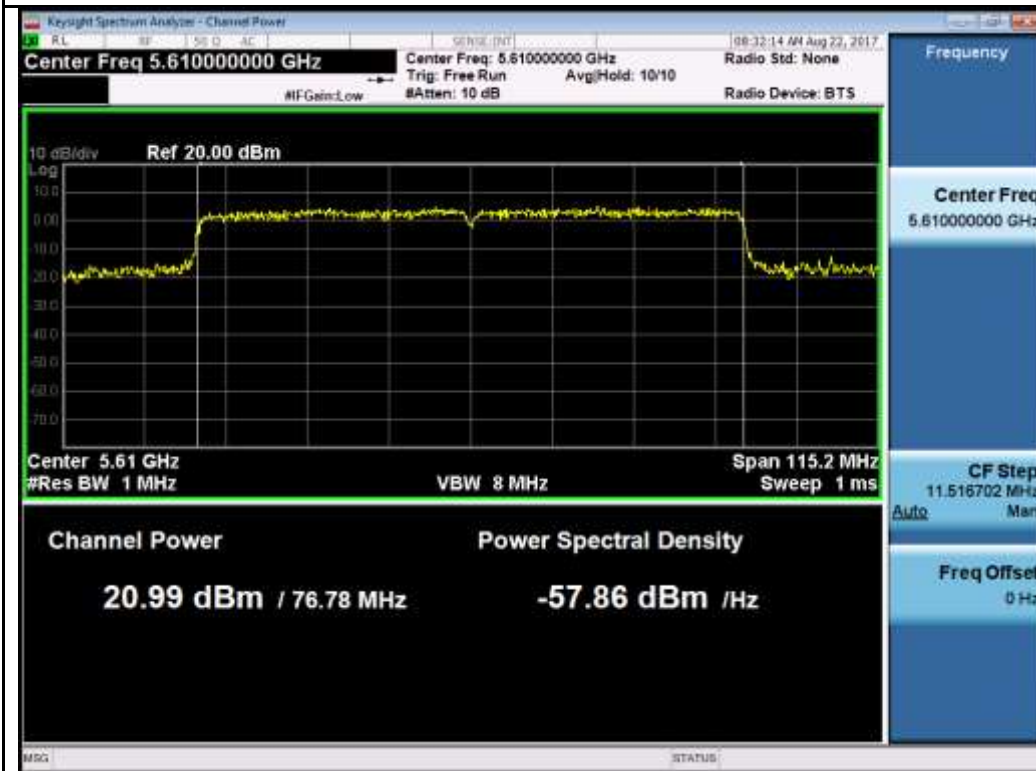


802.11ac-VHT80 5610M


Test Plot for Crossband (W56 procedure):

Chain 0:



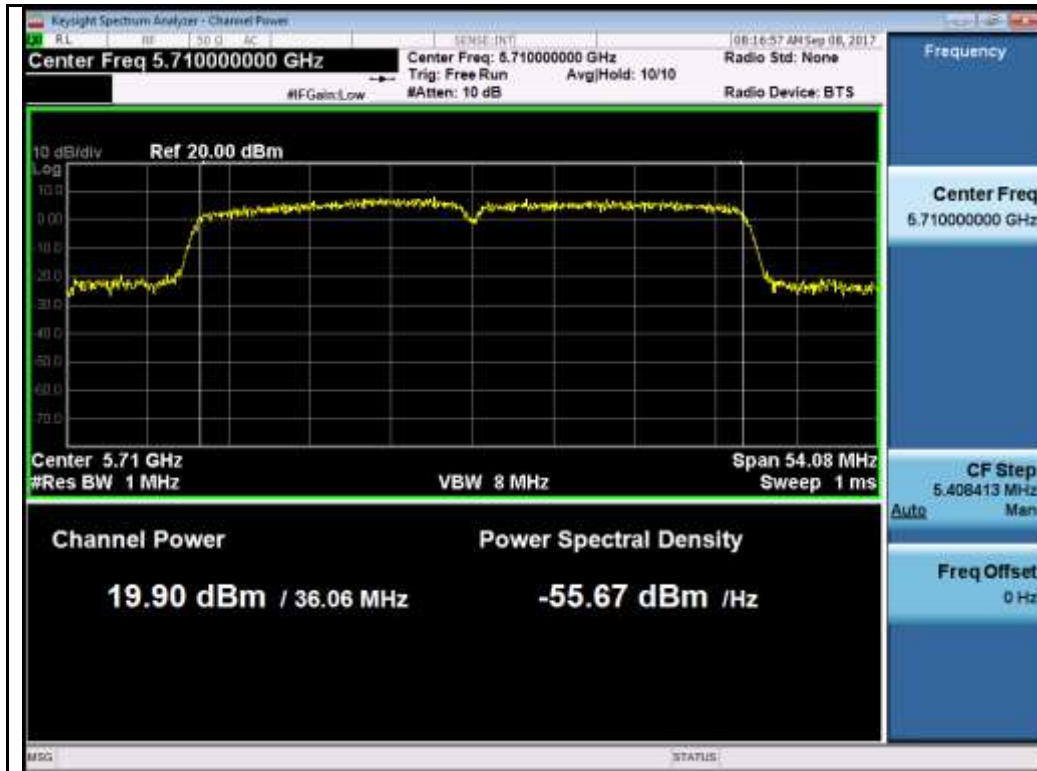


802.11n-HT40 5710M

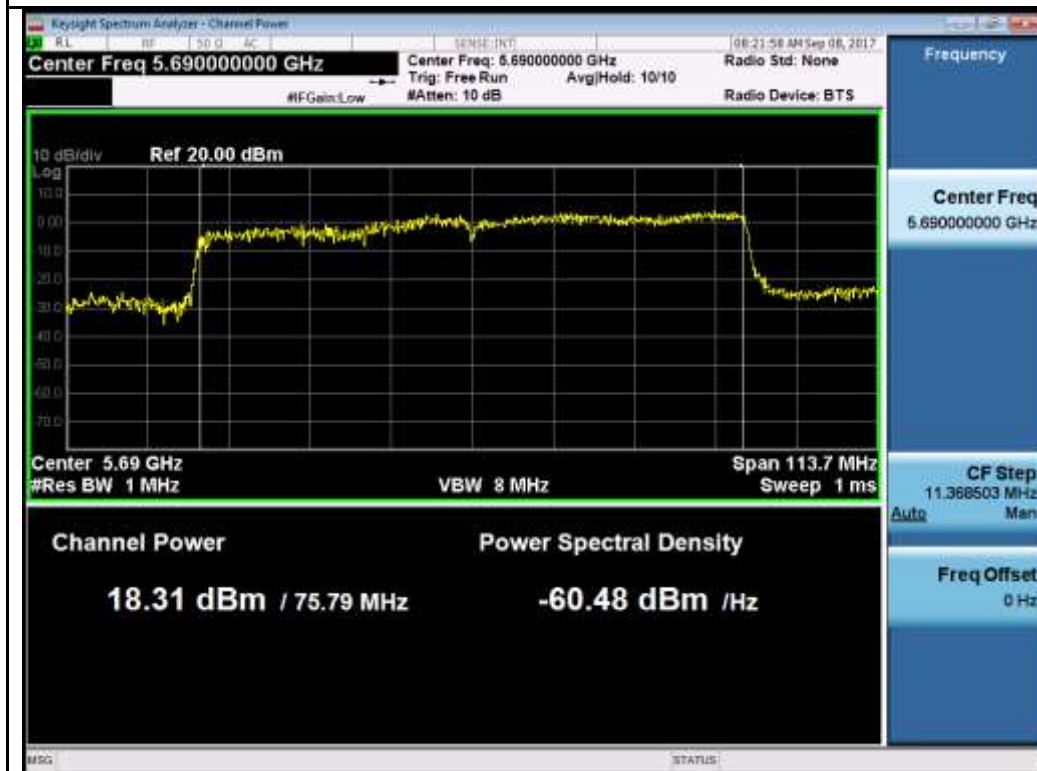


802.11ac-VHT80 5690M


Chain 1:

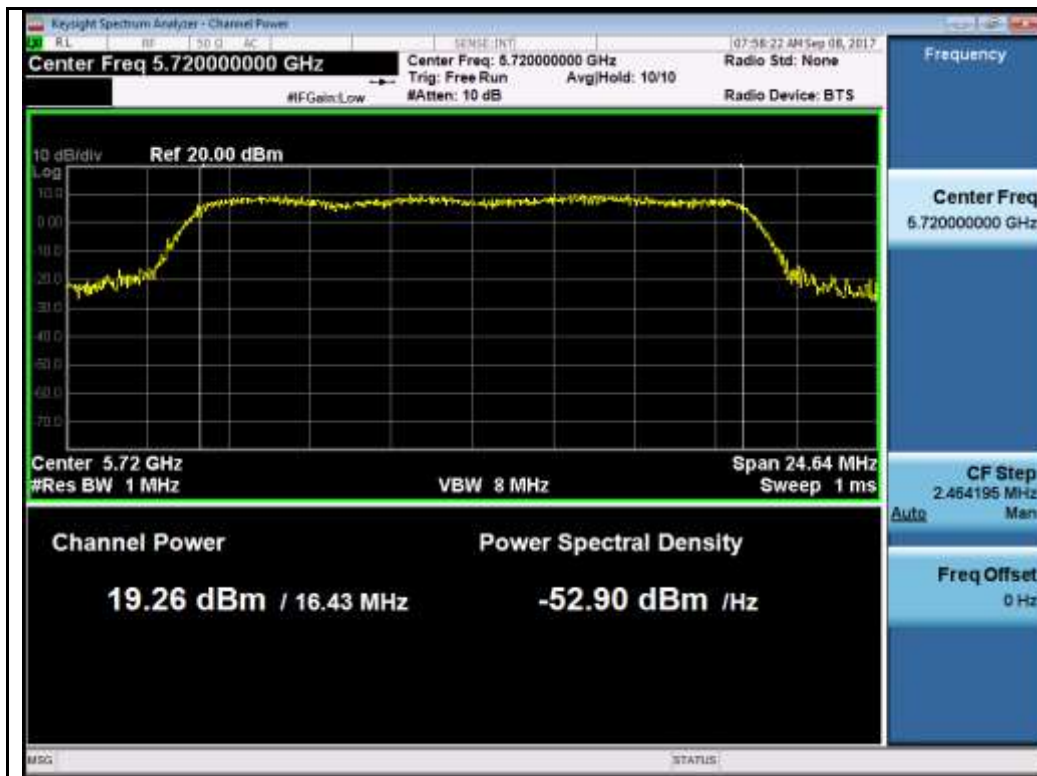


802.11a-5720M

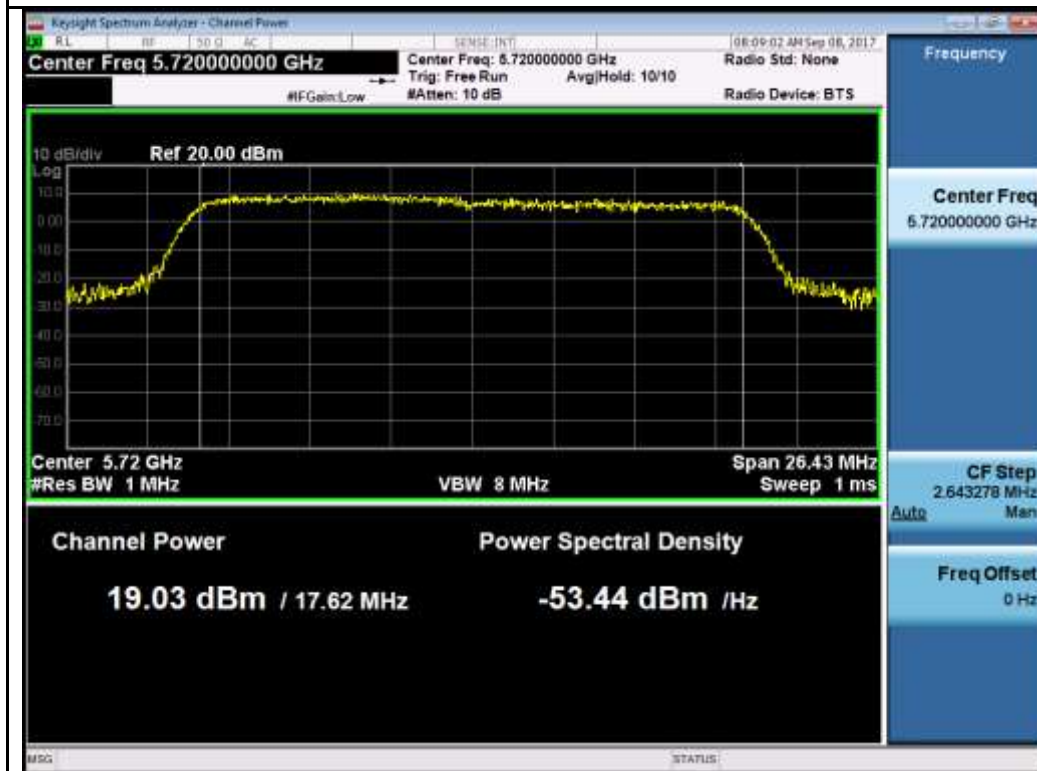

802.11n-HT20 5720M

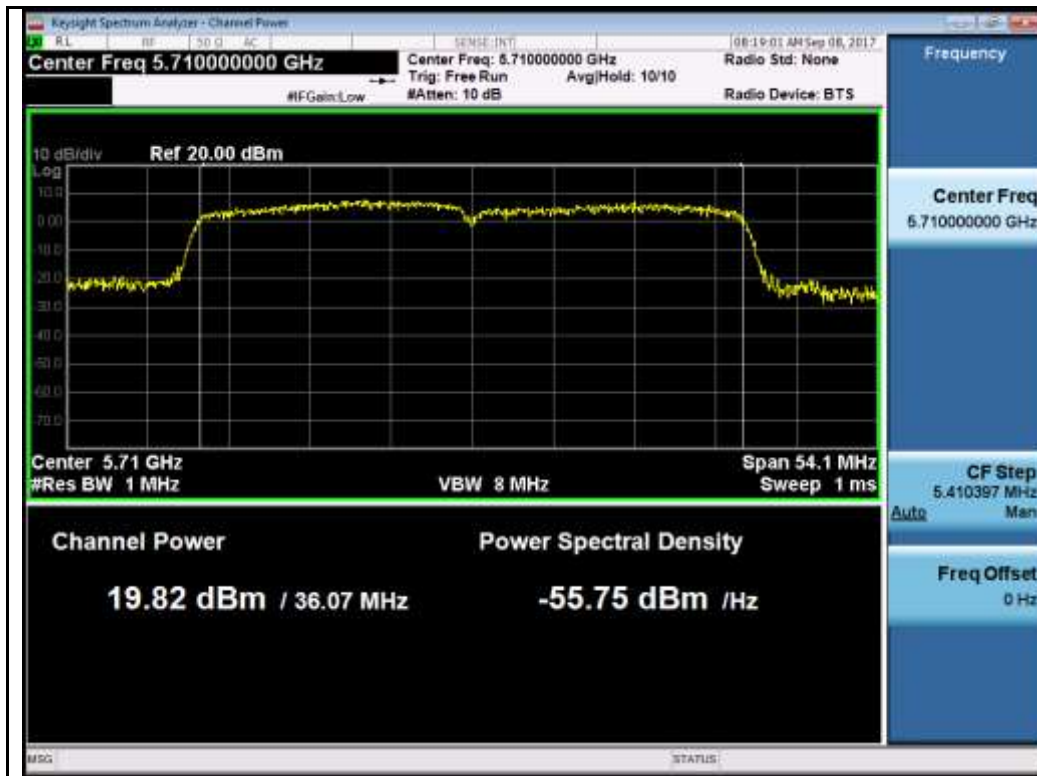

802.11n-HT40 5710M

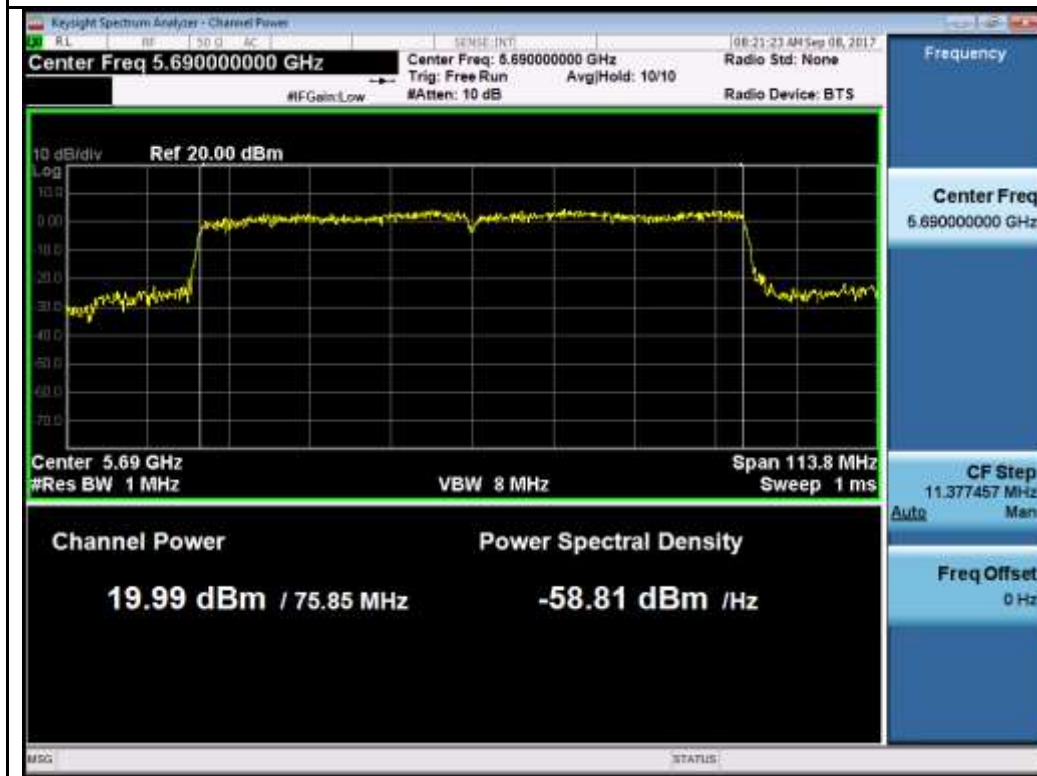


802.11ac-VHT80 5690M


Test Plot for Crossband (W58 procedure):
Chain 0:




802.11a-5720M

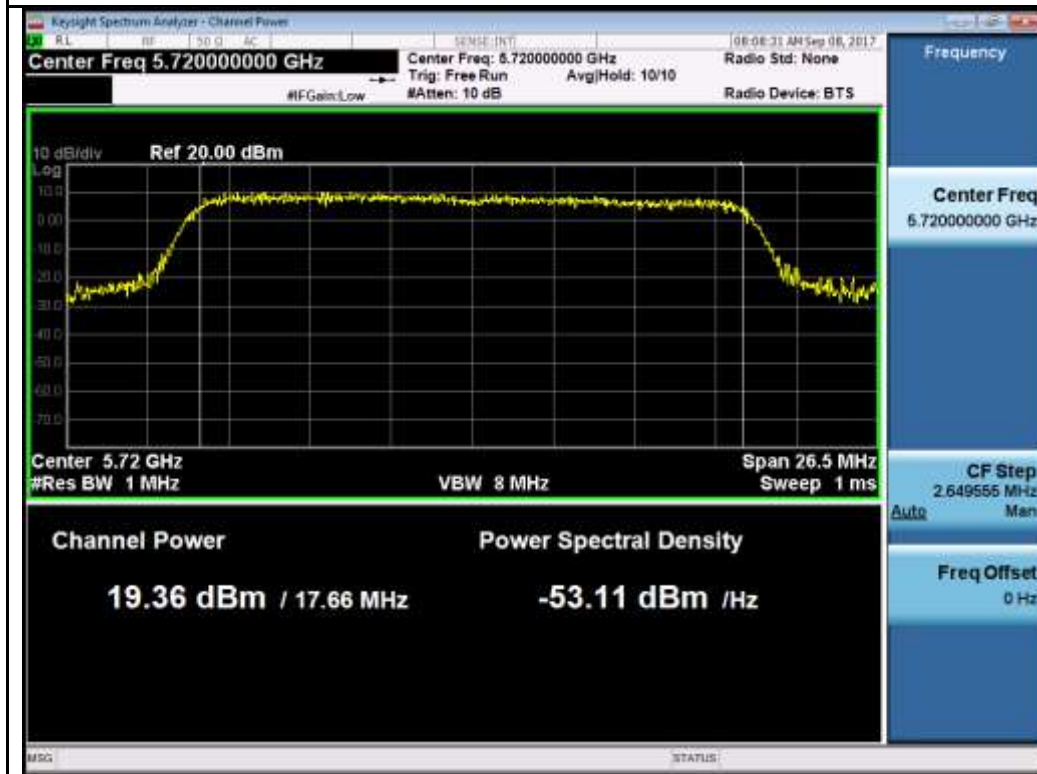

802.11n-HT20 5720M

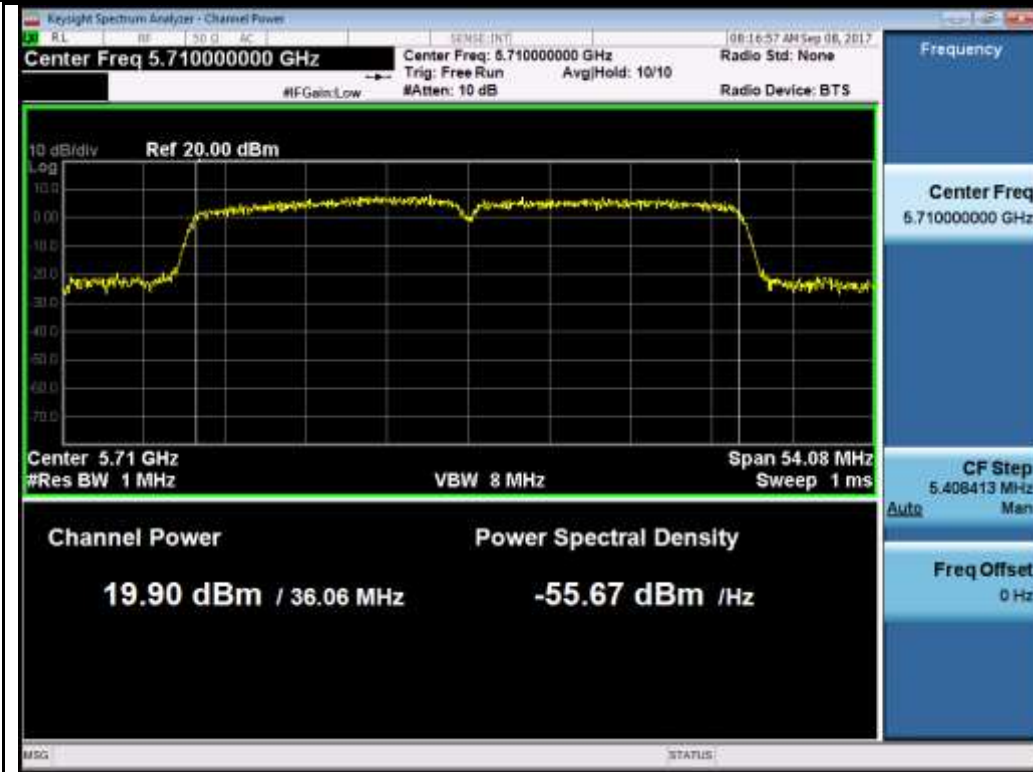


802.11n-HT40 5710M

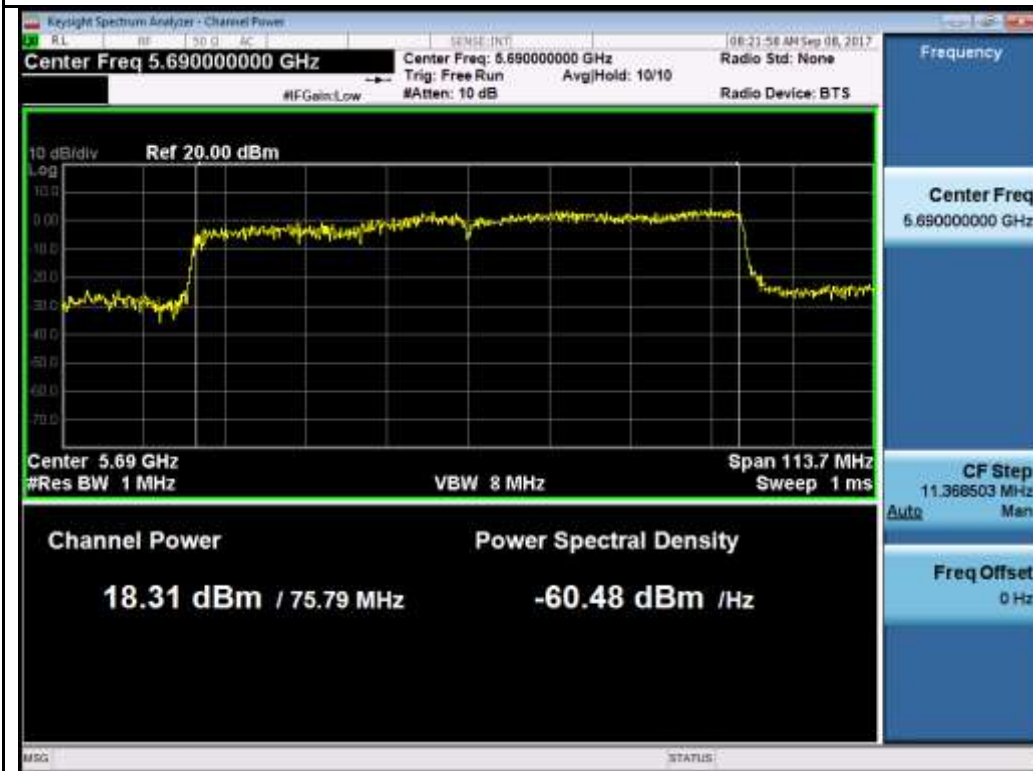


802.11ac-VHT80 5690M


Chain 1:

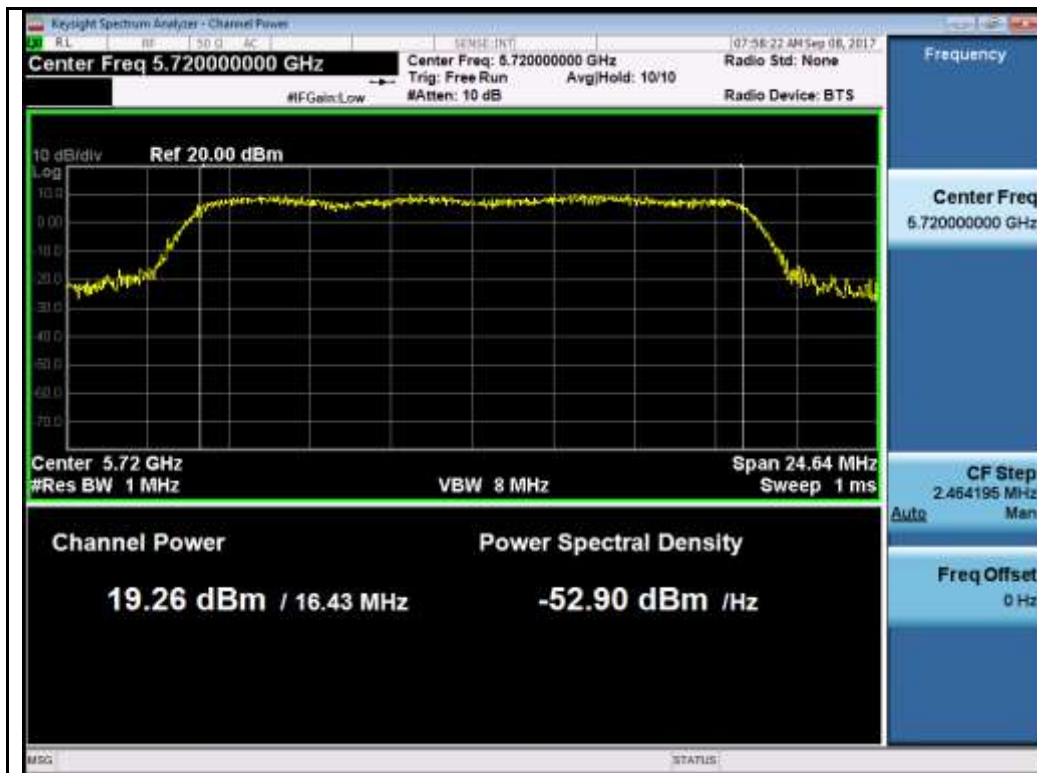


802.11a-5720M

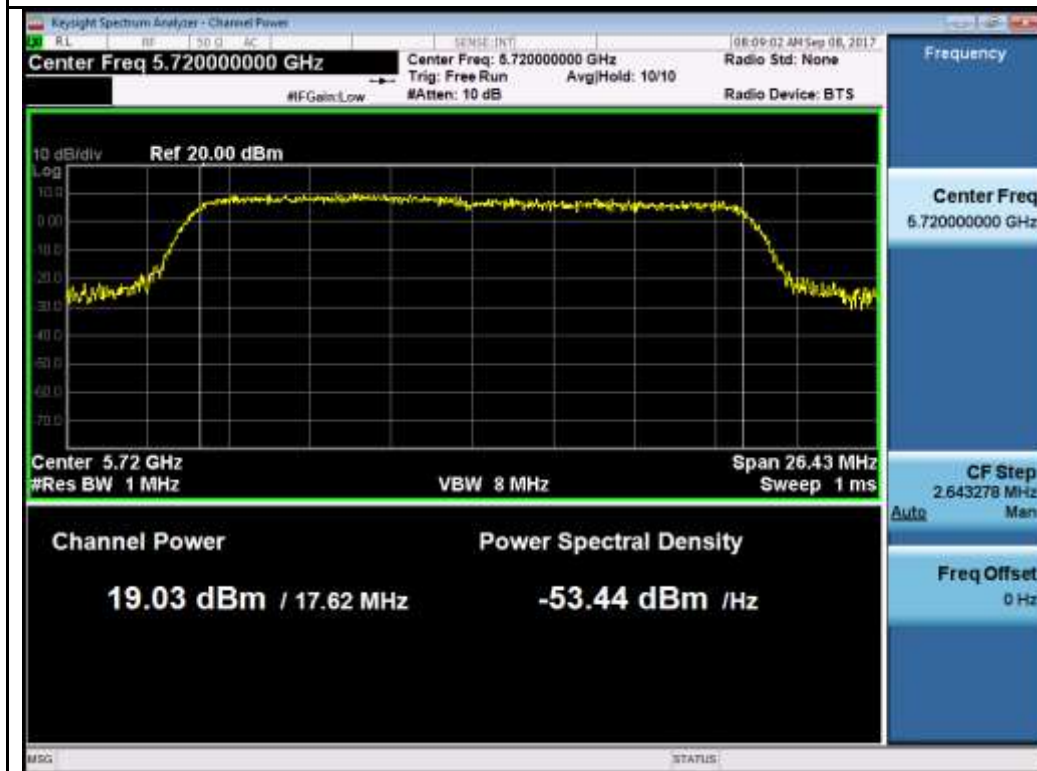

802.11n-HT20 5720M

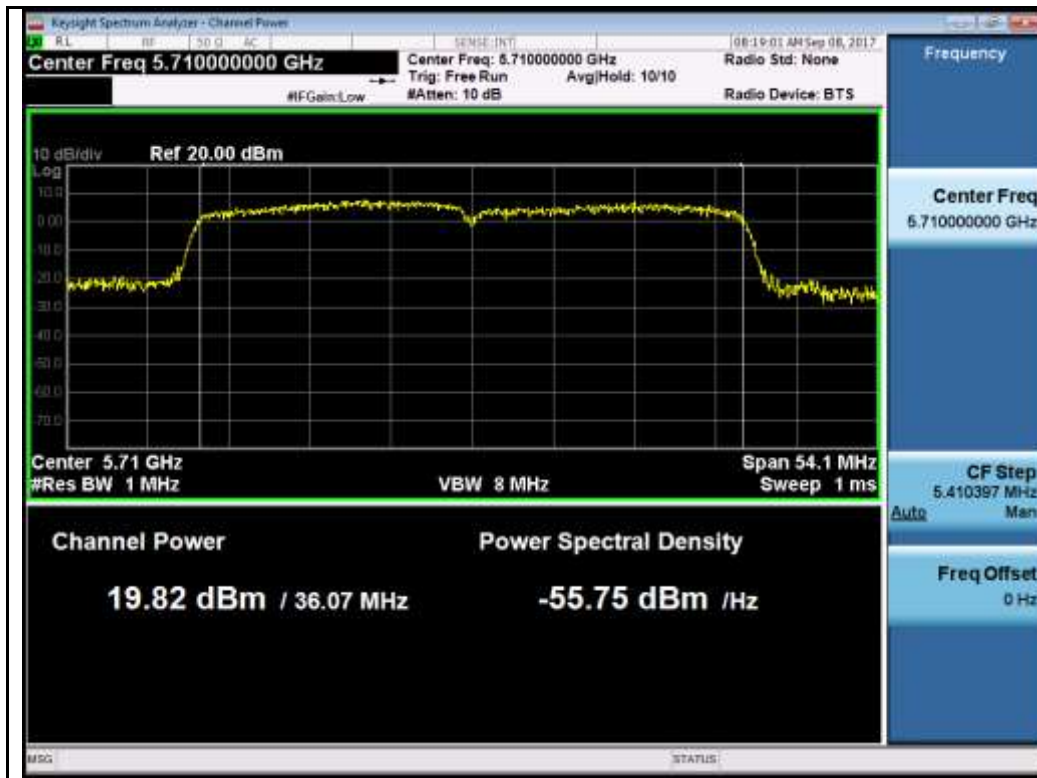


802.11n-HT40 5710M

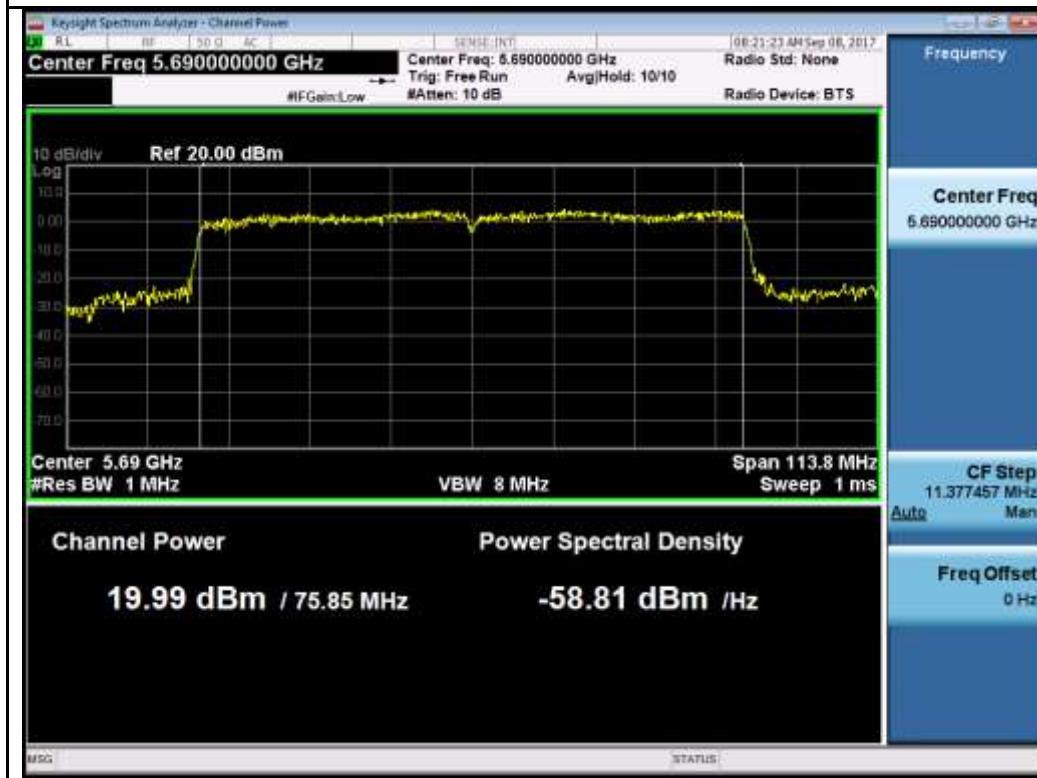

802.11ac-VHT80 5690M

10.4 Peak Power Spectral Density

Requirement(s):

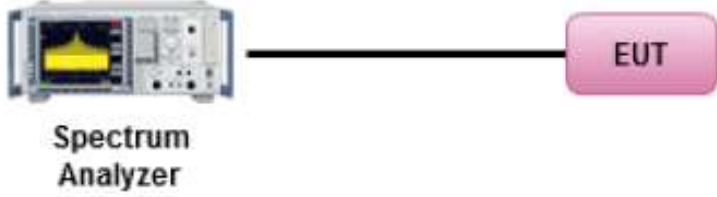Spec	Item	Requirement	Applicable
§ 15.407	a)(1)(i)	For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.	<input type="checkbox"/>
	a)(1)(ii)	For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.	<input type="checkbox"/>
	a)(2)	For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.	<input checked="" type="checkbox"/>
	a)(3)	For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>		
Test Procedure	<p>789033 D02 General UNII Test Procedures New Rules v01, II.F. Method SA-1</p> <p><u>Maximum spectral density measurement procedure</u></p> <ul style="list-style-type: none"> - Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal. - Set RBW = 1 MHz - Set VBW ≥ 3 MHz - Detector = RMS. - Sweep time = auto couple. - Trace mode = max hold. - Trace average at least 100 traces in power averaging - Use the peak marker function to determine the maximum amplitude level within the RBW. <p>Apply correction to the result if different RBW is used.</p>		
Test Date	08/21/2017-10/05/2017	Environmental condition	Temperature 22°C Relative Humidity 46% Atmospheric Pressure 1020mbar
Remark	N/A		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test was done by Cipher at RF test site.

PSD measurement result for 5.3GHz

Type	Test mode	Freq (MHz)	CH	Conducted PSD (dBm/MHz)			Limit (dBm)	Result
				Chain0	Chain1	Combined Power		
PSD	802.11a	5260	Low	7.423	7.249	10.347	11	Pass
	802.11a	5280	Mid	7.787	7.628	10.719	11	Pass
	802.11a	5320	High	6.841	7.101	9.983	11	Pass
	802.11n-20M	5260	Low	7.095	7.232	10.174	11	Pass
	802.11n-20M	5280	Mid	7.275	7.074	10.186	11	Pass
	802.11n-20M	5320	High	5.943	6.138	9.052	11	Pass
	802.11n-40M	5270	Low	6.149	6.336	9.254	11	Pass
	802.11n-40M	5310	Mid	1.099	1.062	4.091	11	Pass
	802.11ac-80M	5290	High	-3.013	-3.350	-0.168	11	Pass

PSD measurement result for 5.5GHz

Type	Test mode	Freq (MHz)	CH	Conducted PSD (dBm/MHz)			Limit (dBm)	Result
				Chain0	Chain1	Combined Power		
PSD	802.11a	5500	Low	7.979	7.926	10.963	11	Pass
	802.11a	5580	Mid	7.347	7.499	10.434	11	Pass
	802.11a	5700	High	7.197	7.336	10.277	11	Pass
	802.11n-20M	5500	Low	7.856	7.769	10.823	11	Pass
	802.11n-20M	5580	Mid	7.383	7.745	10.578	11	Pass
	802.11n-20M	5700	High	7.168	7.475	10.335	11	Pass
	802.11n-40M	5510	Low	1.950	1.611	4.794	11	Pass
	802.11n-40M	5550	Mid	5.609	5.740	8.685	11	Pass
	802.11n-40M	5670	High	5.788	5.675	8.742	11	Pass
	802.11ac-80M	5530	Low	-2.664	-3.290	0.045	11	Pass
	802.11ac-80M	5610	High	1.995	1.800	4.909	11	Pass

Note: Two chains are cross-polarized, additional gain is $10 \log_{10}(\text{NANT})=0\text{dB}$, $N=1$, max directional gain of the EUT is 3.5dBi. No limit adjustment is needed. All the mode transmission is MIMO.

PSD measurement result for cross channels (in band 5470-5725MHz)

Type	Test mode	Freq (MHz)	CH	Conducted PSD (dBm/MHz)			Limit (dBm)	Result
				Chain0	Chain1	Combined Power		
PSD	802.11a	5720	CROSS	8.045	7.612	10.844	11	Pass
	802.11n-20M	5720	CROSS	7.443	7.285	10.375	11	Pass
	802.11n-40M	5710	CROSS	4.959	5.038	8.009	11	Pass
	802.11ac-80M	5690	CROSS	1.498	1.616	4.568	11	Pass

PSD measurement result for cross channels (in band 5725-5850MHz)


Test mode	Freq (MHz)	CH	Conducted PSD (dBm/MHz)			Corrected Level (dBm/500kHz)	Limit (dBm/500kHz)	Result
			Chain0	Chain1	Combined PSD			
802.11a	5720	CROSS	-0.408	-0.343	2.635	9.625	30	Pass
802.11n-20M	5720	CROSS	-0.653	-0.496	2.437	9.427	30	Pass
802.11n-40M	5710	CROSS	-2.927	-2.595	0.252	7.242	30	Pass
802.11ac-80M	5690	CROSS	-6.465	-6.555	-3.499	3.491	30	Pass

Correction factor=10*log(500/100)=6.99


Note: Two chains are cross-polarized, additional gain is $10 \log_{10}(NANT)=0\text{dB}$, $N=1$, max directional gain of the EUT is 3.5dBi. No limit adjustment is needed. All the mode transmission is MIMO.

Test Plot for W53:


Chain 0:

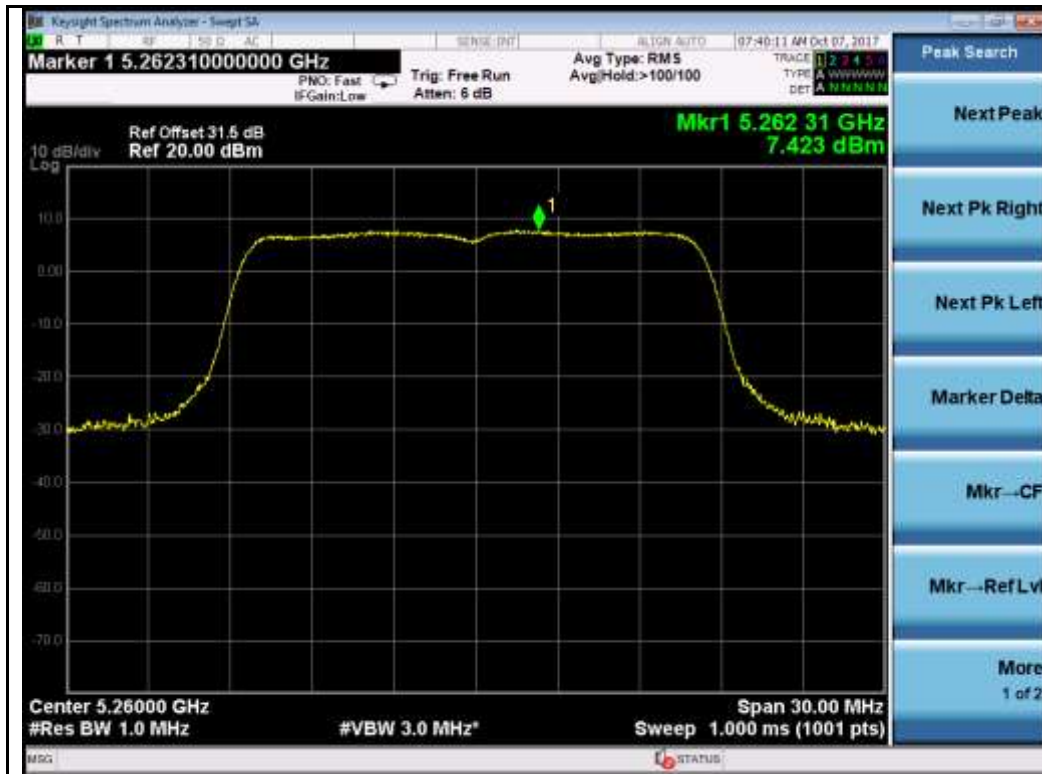


802.11a-5260M

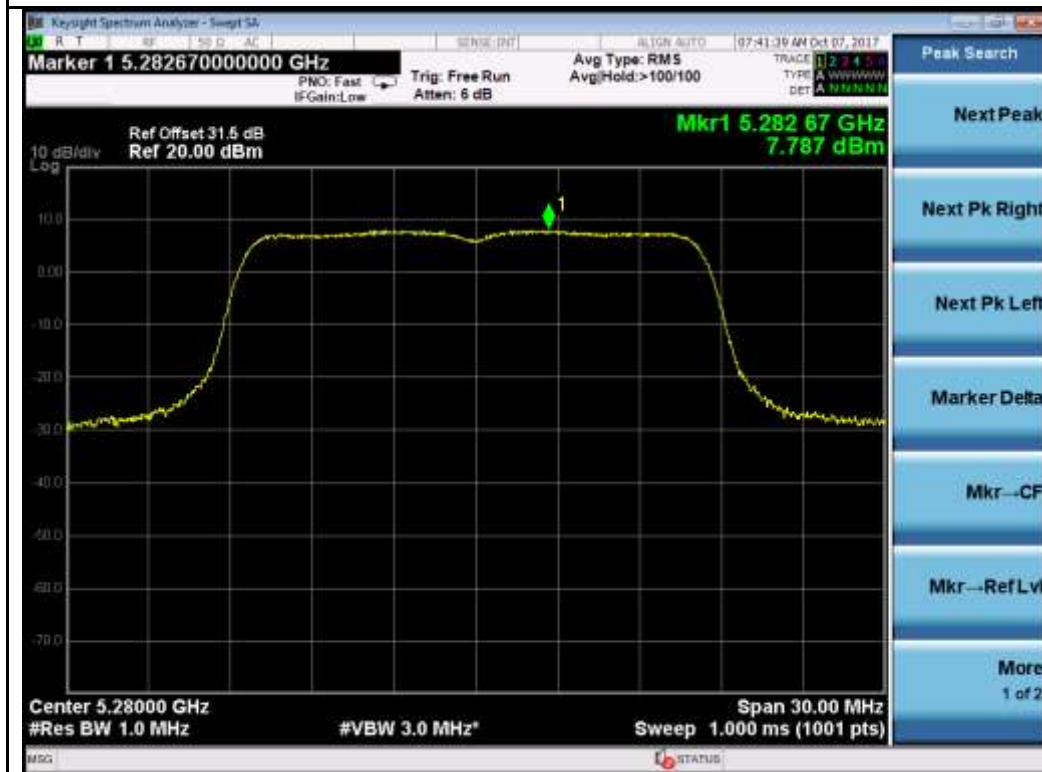


802.11a-5280M

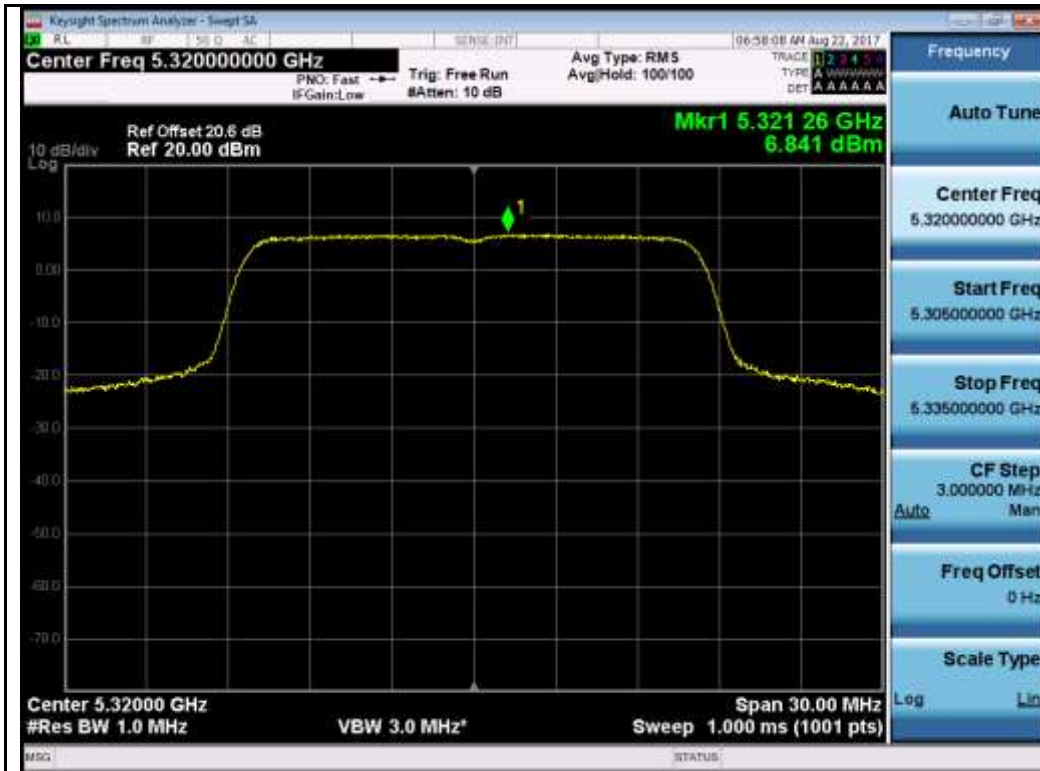


802.11a-5320M

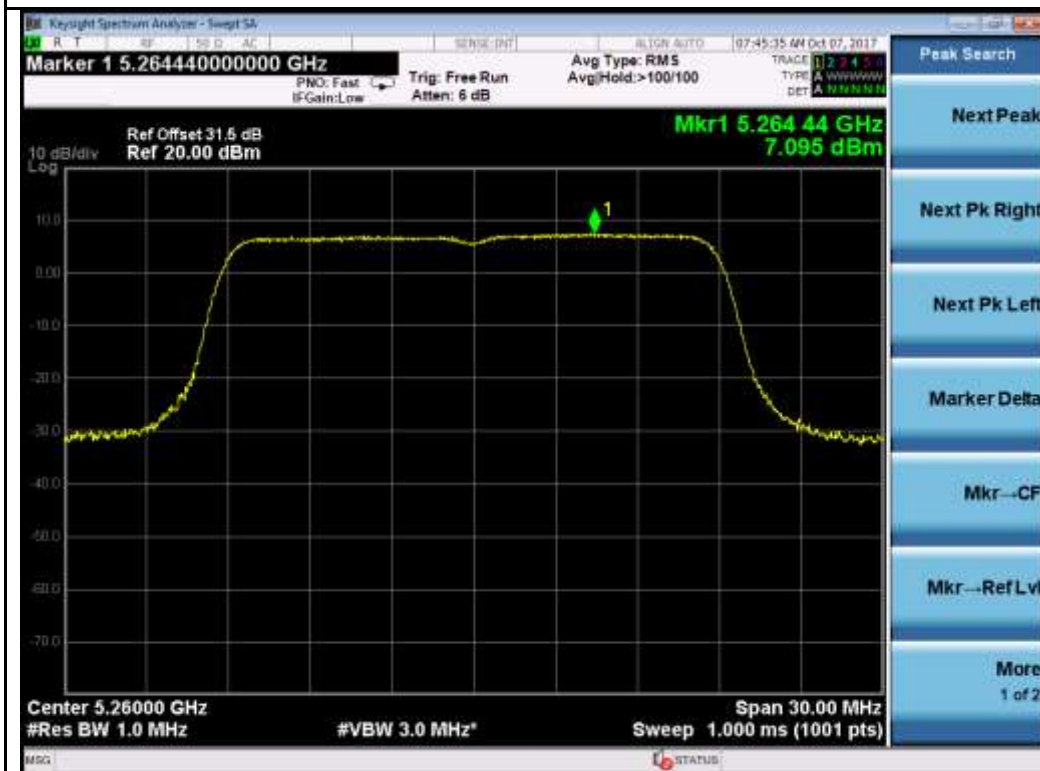


802.11n-HT20 5260M

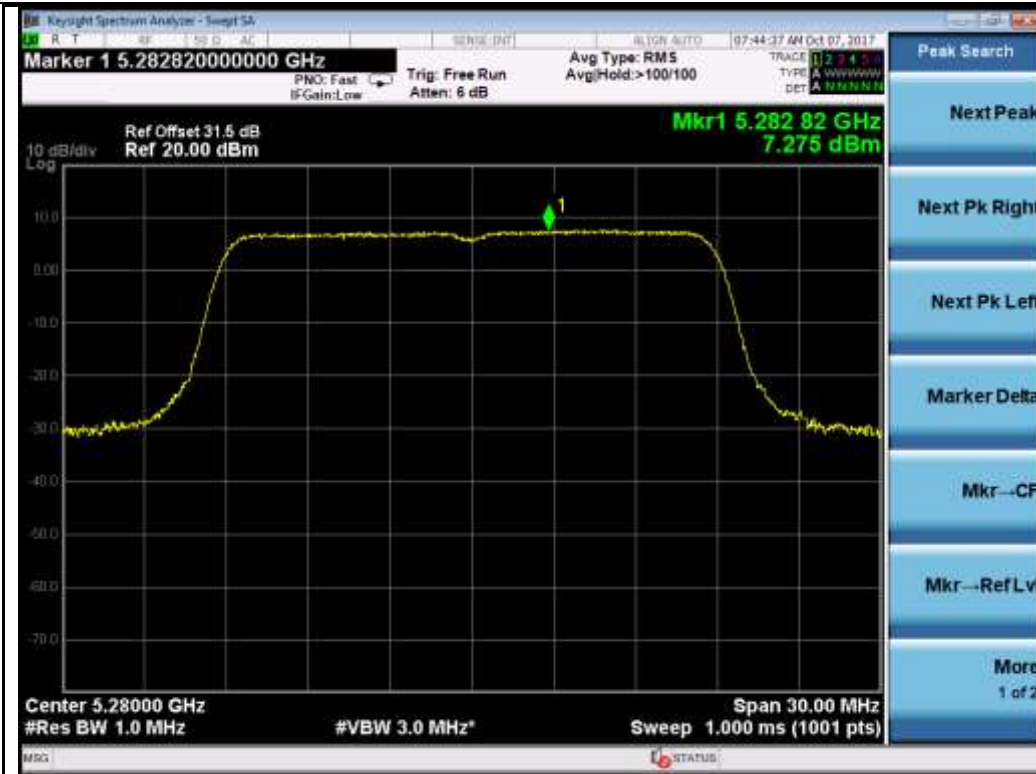


802.11n-HT20 5280M

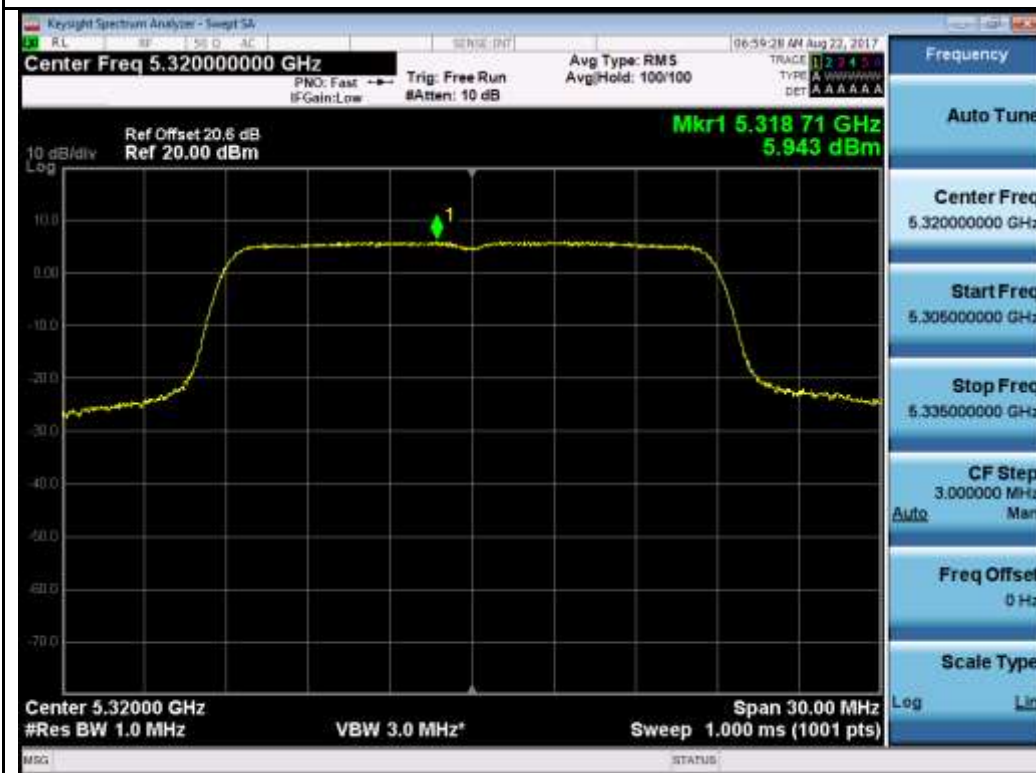

802.11n-HT20 5320M

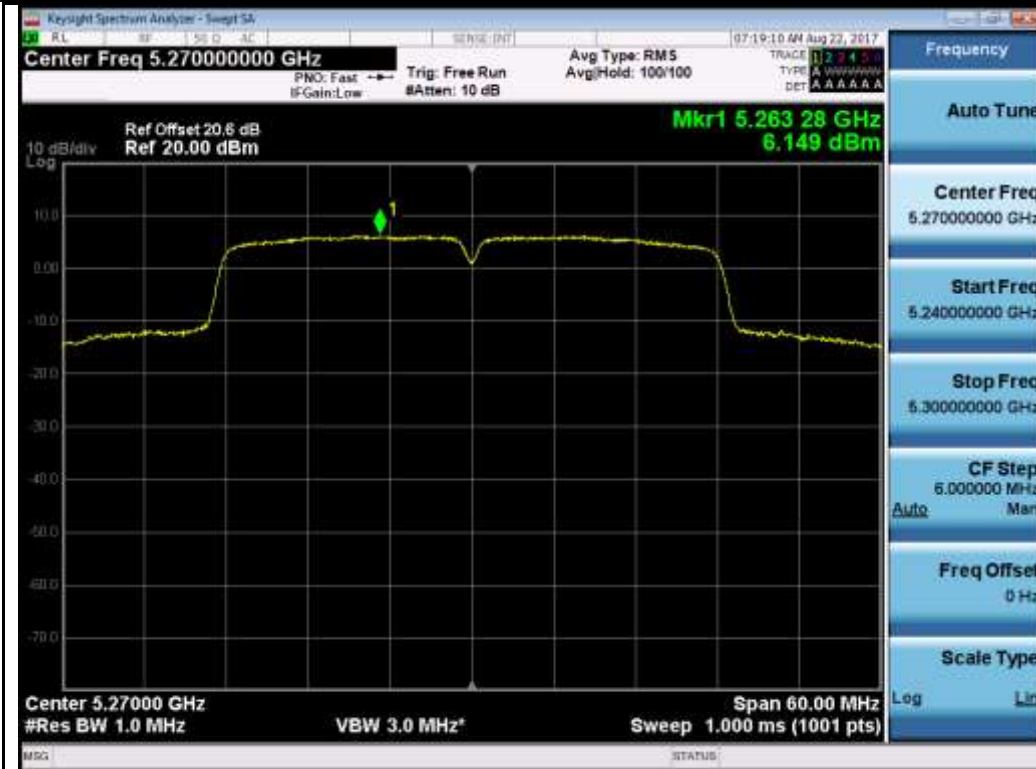


802.11n-HT40 5270M

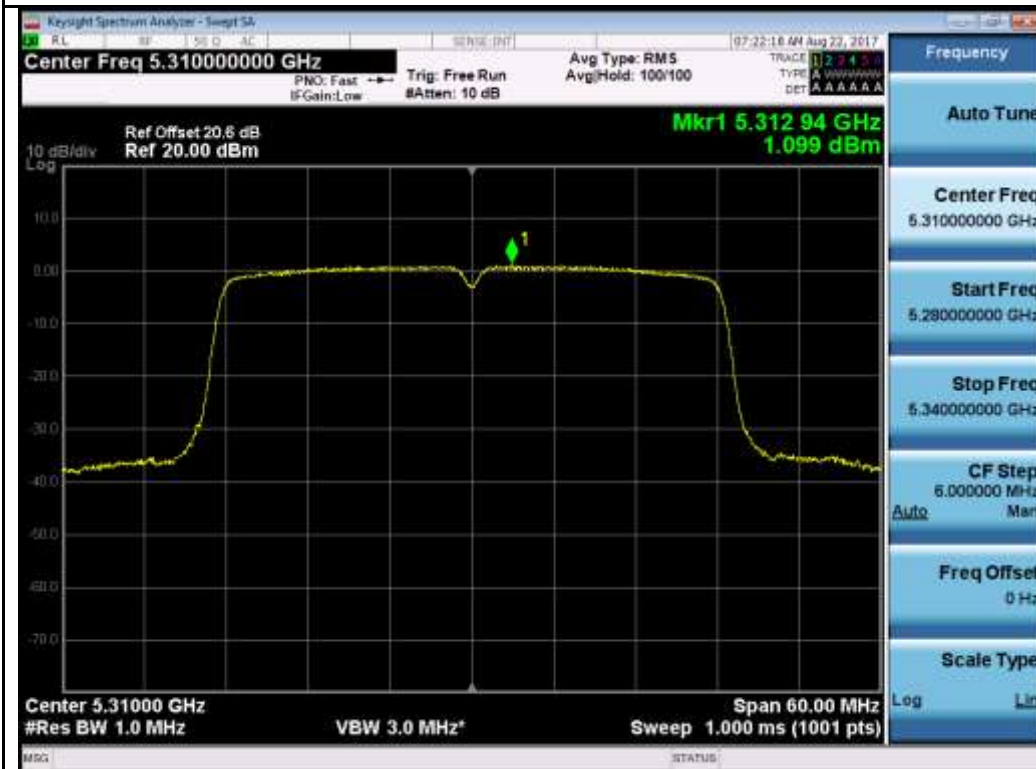


802.11n-HT40 5310M




Chain 1:

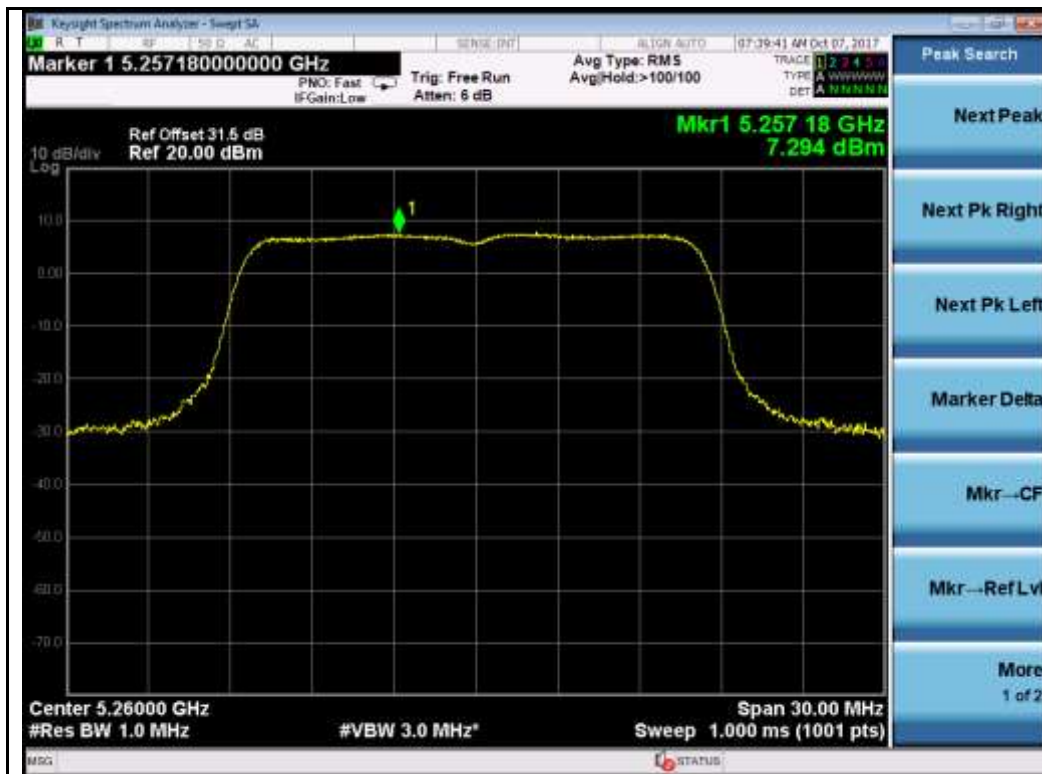

802.11a-5260M

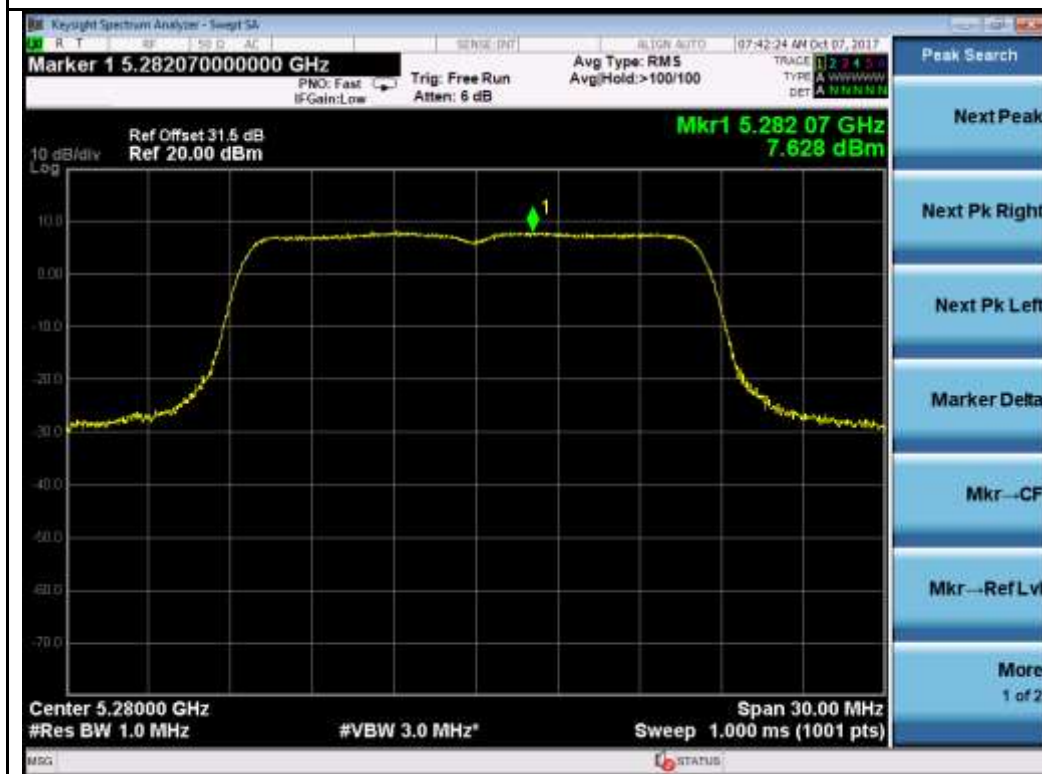


802.11a-5280M

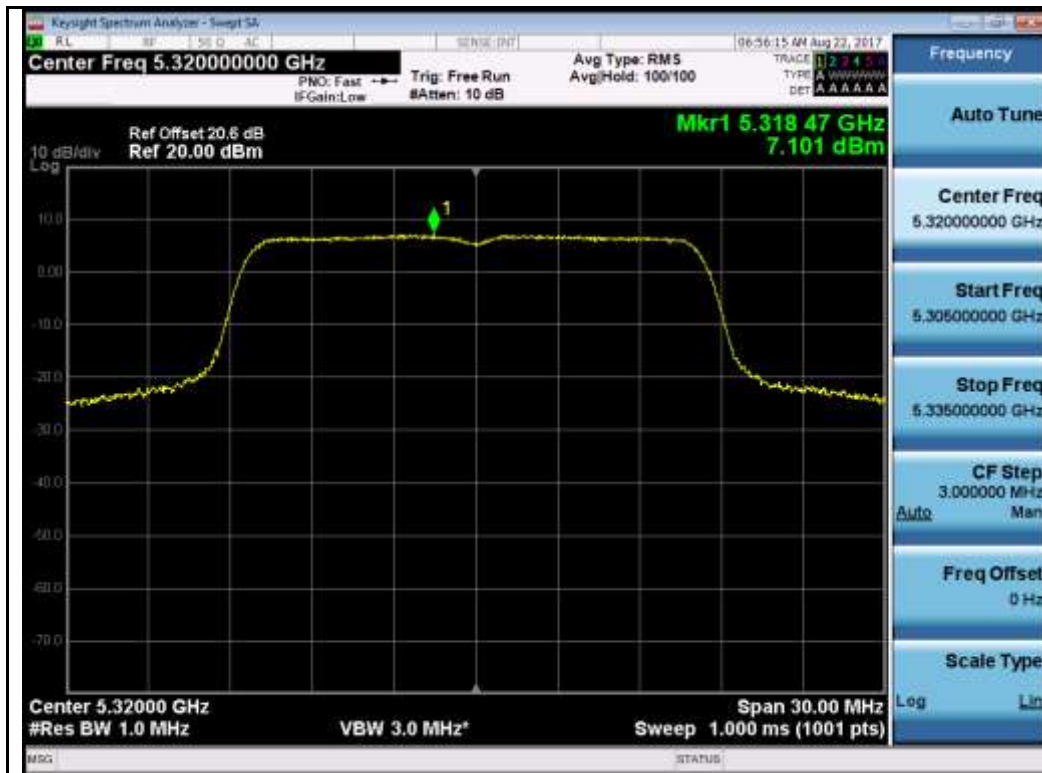

802.11a-5320M



802.11n-HT20 5260M

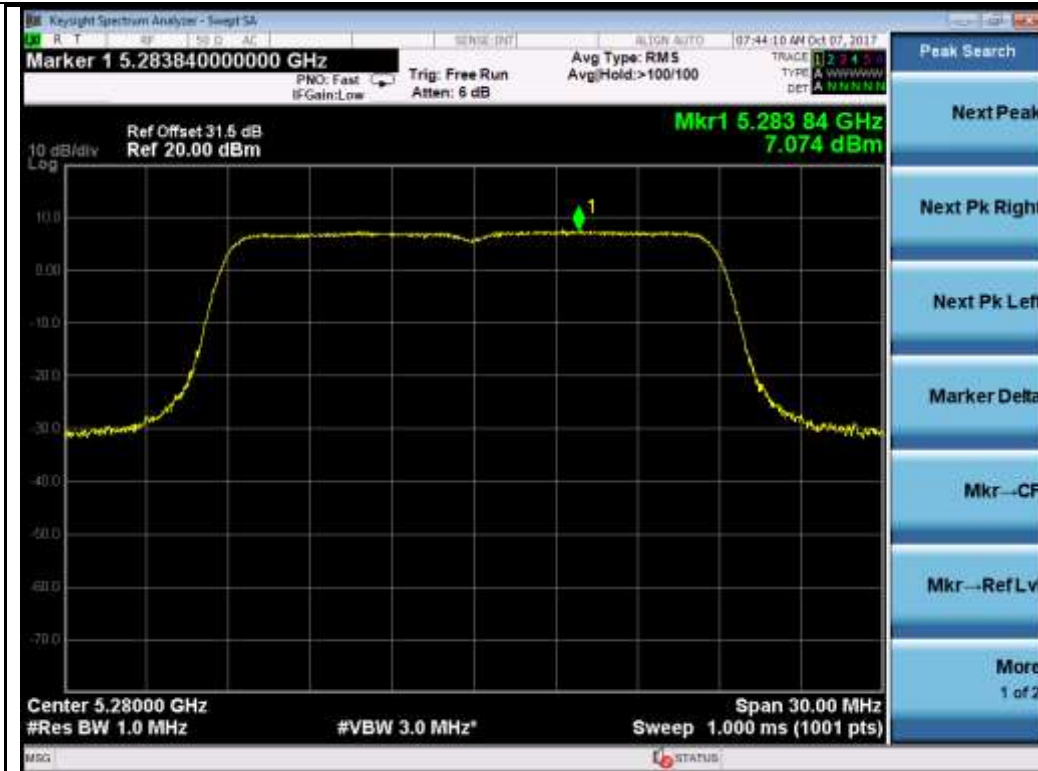


802.11n-HT20 5280M




802.11n-HT20 5320M



802.11n-HT40 5270M

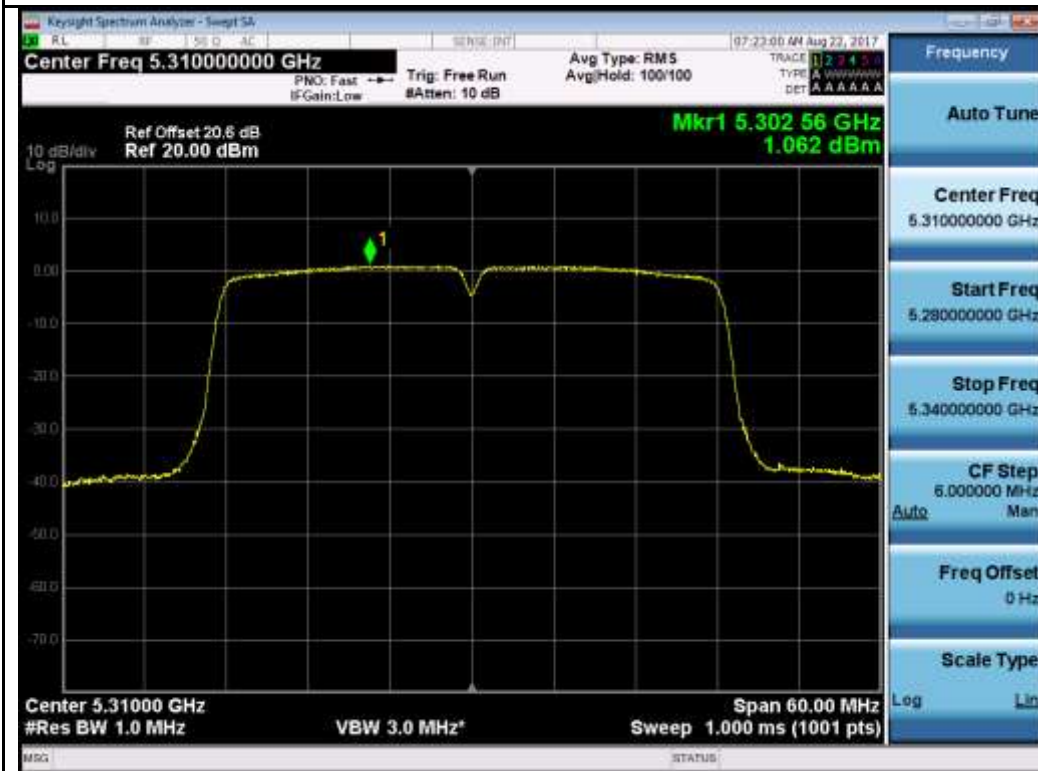

802.11n-HT40 5310M

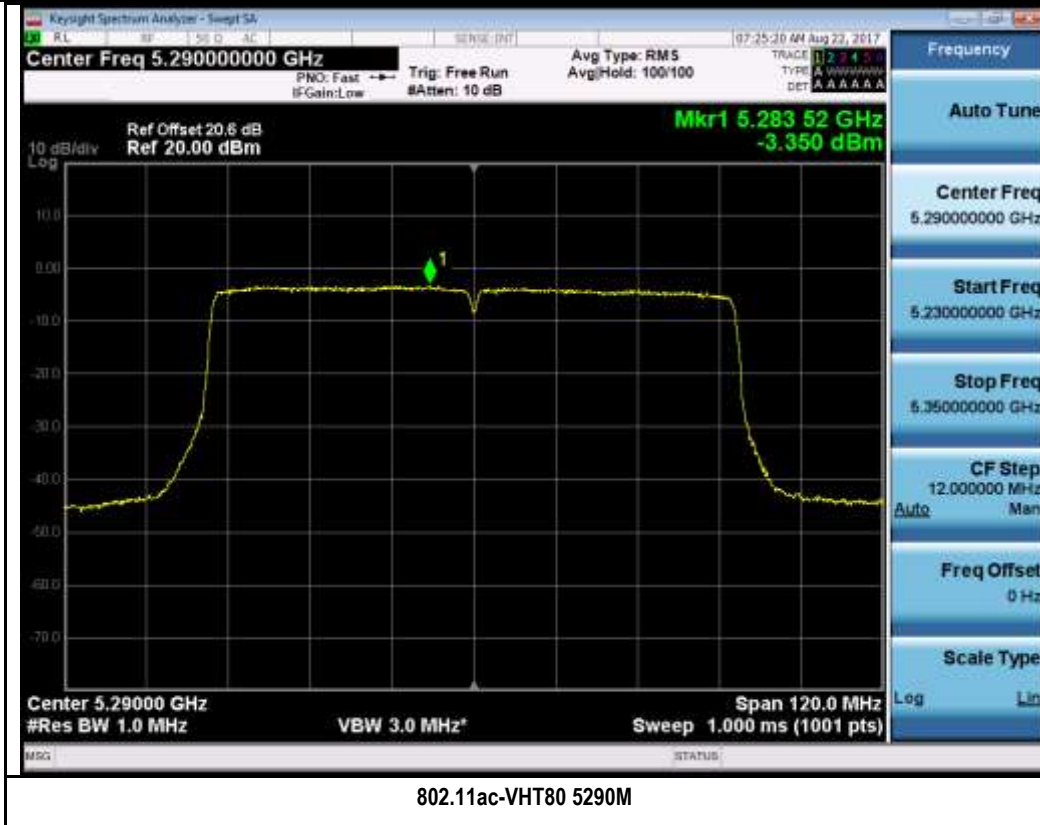


Test Plot for W56:

Chain 0:



802.11a-5500M

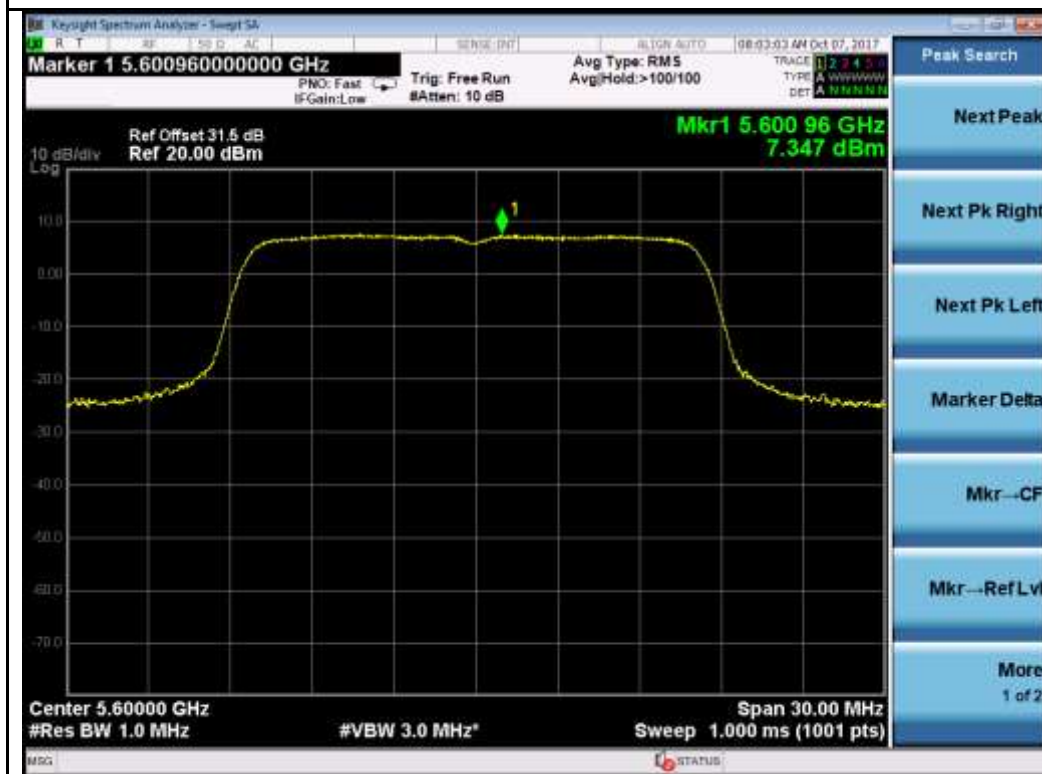

802.11a-5580M