



# RF TEST REPORT



Report No.: FCC\_SL17063001-RUC-018A2\_W53W56  
Supersede Report No.:





|  |   |   |
|--|---|---|
| Applicant  | : | Ruckus Wireless, Inc.   |
| Product Name   | : | T310 (N/S) Access Point   |
| Model No.  | : | T310  |
| Test Standard  | : | 47 CFR 15.407   |
| Test Method  | : | ANSI C63.4: 2014<br>789033 D02 General UNII Test Procedures New Rules v01 |
| FCC ID   | : | S9GT310NS   |
| IC ID  | : | 5912A-T310NS  |
| Dates of test  | : | 11/11/2017-11/21/2017   |
| Issue Date   | : | 11/28/2017  |
| Test Result  | : | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail    |
| Equipment complied with the specification [X]<br>Equipment did not comply with the specification [ ] |   |   |

| This Test Report is Issued Under the Authority of:   |  |
|--|--|
|   |  |
| Cipher<br>Test Engineer  | Chen Ge<br>Engineer Reviewer   |
| This test report may be reproduced in full only<br>Test result presented in this test report is applicable to the tested sample only |  |

Issued By:  
SIEMIC Laboratories  
775 Montague Expressway, Milpitas, 95035 CA



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: [www.siemic.com](http://www.siemic.com); Follow us at:    

## Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

| Country/Region | Accreditation Body     | Scope                             |
|----------------|------------------------|-----------------------------------|
| USA            | FCC, A2LA              | EMC, RF/Wireless, Telecom         |
| Canada         | IC, A2LA, NIST         | EMC, RF/Wireless, Telecom         |
| Taiwan         | BSMI, NCC, NIST        | EMC, RF, Telecom, Safety          |
| Hong Kong      | OFTA, NIST             | RF/Wireless, Telecom              |
| Australia      | NATA, NIST             | EMC, RF, Telecom, Safety          |
| Korea          | KCC/RRA, NIST          | EMI, EMS, RF, Telecom, Safety     |
| Japan          | VCCI, JATE, TELEC, RFT | EMI, RF/Wireless, Telecom         |
| Mexico         | NOM, COFETEL, Caniety  | Safety, EMC, RF/Wireless, Telecom |
| Europe         | A2LA, NIST             | EMC, RF, Telecom, Safety          |
| Israel         | MOC, NIST              | EMC, RF, Telecom, Safety          |

### Accreditations for Product Certifications

| Country   | Accreditation Body | Scope                 |
|-----------|--------------------|-----------------------|
| USA       | FCC TCB, NIST      | EMC, RF, Telecom      |
| Canada    | IC FCB, NIST       | EMC, RF, Telecom      |
| Singapore | iDA, NIST          | EMC, RF, Telecom      |
| EU        | NB                 | EMC & R&TTE Directive |
| Japan     | MIC (RCB 208)      | RF, Telecom           |
| Hong Kong | OFTA (US002)       | RF, Telecom           |

## CONTENTS

|      |  |     |
|------|--|-----|
| 1    | REPORT REVISION HISTORY .....                              | 4   |
| 2    | EXECUTIVE SUMMARY.....                                     | 5   |
| 3    | CUSTOMER INFORMATION .....                                 | 5   |
| 4    | TEST SITE INFORMATION .....                                | 5   |
| 5    | MODIFICATION.....  | 5   |
| 6    | EUT INFORMATION .....                                      | 6   |
| 6.1  | EUT Description .....                                      | 6   |
| 6.2  | Radio Description .....                                    | 6   |
| 6.3  | EUT Photos - External .....                                | 10  |
| 6.4  | EUT Photos - Internal .....                                | 11  |
| 6.5  | Test Setup Photos.....                                     | 14  |
| 7    | SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION..... | 16  |
| 7.1  | Supporting Equipment .....                                 | 16  |
| 7.2  | Cabling Description .....                                  | 16  |
| 7.3  | Test Software Description .....                            | 16  |
| 8    | TEST SUMMARY.....  | 17  |
| 9    | MEASUREMENT UNCERTAINTY .....                              | 18  |
| 9.1  | Conducted Emissions .....                                  | 18  |
| 9.2  | Radiated Emissions (30MHz to 1GHz).....                    | 18  |
| 9.3  | Radiated Emissions (1GHz to 40GHz).....                    | 19  |
| 9.4  | RF conducted measurement.....                              | 19  |
| 10   | MEASUREMENTS, EXAMINATION AND DERIVED RESULTS.....         | 20  |
| 10.1 | Antenna Requirement.....                                   | 20  |
| 10.2 | Conducted Emissions.....                                   | 21  |
| 10.3 | 6dB & 26 dB Bandwidth.....                                 | 26  |
| 10.4 | Output Power .....   | 61  |
| 10.5 | Peak Power Spectral Density .....                          | 68  |
| 10.6 | Band Edge Measurement .....                                | 165 |
| 10.7 | Radiated Spurious Emissions below 1GHz.....                | 214 |
| 10.8 | Radiated Spurious Emissions above 1GHz.....                | 216 |
|      | ANNEX A. TEST INSTRUMENT.....                              | 232 |
|      | ANNEX B. SIEMIC ACCREDITATION .....                        | 233 |

## 1 Report Revision History

| Report No.                      | Report Version | Description | Issue Date |
|---------------------------------|----------------|-------------|------------|
| FCC_SL17063001-RUC-018A2_W53W56 | None           | Original    | 11/28/2017 |
|                                 |                |             |            |
|                                 |                |             |            |
|                                 |                |             |            |
|                                 |                |             |            |

## 2 Executive Summary

The purpose of this test program was to demonstrate compliance of following product

Company: Ruckus Wireless, Inc.  
Product: T310 (N/S) Access Point  
Model: T310

against the current Stipulated Standards. The specified model product stated above has demonstrated compliance with the Stipulated Standard listed on 1<sup>st</sup> page.

## 3 Customer information

|                      |   |  |
|----------------------|---|--|
| Applicant Name       | : | Ruckus Wireless, Inc.                                  |
| Applicant Address    | : | 350 West Java Drive, Sunnyvale, California 94089 U.S.A |
| Manufacturer Name    | : | Ruckus Wireless, Inc.                                  |
| Manufacturer Address | : | 350 West Java Drive, Sunnyvale, California 94089 U.S.A |

## 4 Test site information

|                      |   |
|----------------------|---|
| Lab performing tests | SIEMIC Laboratories                         |
| Lab Address          | 775 Montague Expressway, Milpitas, CA 95035 |
| FCC Test Site No.    | 881796                                      |
| IC Test Site No.     | 4842D-2                                     |
| VCCI Test Site No.   | A0133                                       |

## 5 Modification

| Index | Item | Description | Note |
|-------|------|-------------|------|
| -     | -    | -           | -    |
|       |      |             |      |
|       |      |             |      |
|       |      |             |      |
|       |      |             |      |
|       |      |             |      |

## 6 EUT Information

### 6.1 EUT Description

|                           |                         |
|---------------------------|-------------------------|
| Product Name              | T310 (N/S) Access Point |
| Model No.                 | T310                    |
| Trade Name                | Ruckus                  |
| Serial No.                | 431706000021            |
| Host Model No.            | N/A                     |
| Input Power               | 100-240VAC 50/60Hz      |
| Power Adapter Manu/Model  | HK-AD-120A100-US        |
| Power Adapter SN          | N/A                     |
| Date of EUT received      | 11/10/2017              |
| Equipment Class/ Category | DTS, UNII               |
| Port/Connectors           | PoE, Ethernet           |

### 6.2 Radio Description

| Radio Type             | 802.11a  | 802.11n-20M                             | 802.11n-40M                             | 802.11ac-80M                            |
|------------------------|--|---|---|---|
| Operating Frequency    | 5260-5320MHz<br>5500-5720MHz   | 5260-5320MHz<br>5500-5720MHz            | 5270-5310MHz<br>5510-5710MHz            | 5290MHz, 5530MHz<br>5610MHz, 5690MHz    |
| Modulation             | OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)  | OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM) | OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM) | OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM) |
| Channel Spacing        | 20MHz  | 20MHz                                   | 40MHz                                   | 80MHz                                   |
| Number of Channels     | 16   | 16                                      | 6                                       | 4                                       |
| Antenna Type           | T310S: Internal dipole array<br>T310N: Internal patch array  |   |   |   |
| Antenna Gain (Peak)    | T310S: 5G: Highest Gain 8dBi<br>T310N: 5G: 12.6dBi for Vertical 13.5dBi for Horizontal   |   |   |   |
| Antenna Connector Type | U.FL   |   |   |   |
| Note                   | T310S: Tow chains for 5G, both can be Vertical and Horizontal<br>T310N: Tow chains for 5G, one for Vertical and one for Horizontal |   |   |   |

EUT Power level setting

T310N

| Mode         | Frequency | Power Setting |
|--------------|-----------|---------------|
| 802.11-a     | 5260      | 28            |
| 802.11-a     | 5280      | 28            |
| 802.11-a     | 5320      | 28            |
| 802.11-n-20  | 5260      | 28            |
| 802.11-n-20  | 5280      | 28            |
| 802.11-n-20  | 5320      | 28            |
| 802.11-n-40  | 5270      | 28            |
| 802.11-n-40  | 5310      | 28            |
| 802.11-ac-80 | 5290      | 30            |
|              |           |               |
| 802.11-a     | 5500      | 26            |
| 802.11-a     | 5580      | 26            |
| 802.11-a     | 5700      | 26            |
| 802.11-n-20  | 5500      | 26            |
| 802.11-n-20  | 5580      | 26            |
| 802.11-n-20  | 5700      | 26            |
| 802.11-n-40  | 5510      | 27            |
| 802.11-n-40  | 5590      | 27            |
| 802.11-n-40  | 5670      | 27            |
| 802.11-ac-80 | 5530      | 28            |
| 802.11-ac-80 | 5610      | 28            |

CROSS Band channels power setting

| Mode         | Frequency | Power Setting |
|--------------|-----------|---------------|
| 802.11-a     | 5720      | 26            |
| 802.11-n-20  | 5720      | 26            |
| 802.11-n-40  | 5710      | 26            |
| 802.11-ac-80 | 5690      | 27            |

Note:T310N power setting for Beamforming and Non-Beamforming modes are same.

T310S

| Mode         | Frequency | Power Setting |
|--------------|-----------|---------------|
| 802.11-a     | 5260      | 38            |
| 802.11-a     | 5280      | 38            |
| 802.11-a     | 5320      | 38            |
| 802.11-n-20  | 5260      | 38            |
| 802.11-n-20  | 5280      | 38            |
| 802.11-n-20  | 5320      | 38            |
| 802.11-n-40  | 5270      | 38            |
| 802.11-n-40  | 5310      | 38            |
| 802.11-ac-80 | 5290      | 39            |
|              |           |               |
| 802.11-a     | 5500      | 36            |
| 802.11-a     | 5580      | 38            |
| 802.11-a     | 5700      | 38            |
| 802.11-n-20  | 5500      | 38            |
| 802.11-n-20  | 5580      | 38            |
| 802.11-n-20  | 5700      | 38            |
| 802.11-n-40  | 5510      | 38            |
| 802.11-n-40  | 5590      | 38            |
| 802.11-n-40  | 5670      | 38            |
| 802.11-ac-80 | 5530      | 39            |
| 802.11-ac-80 | 5610      | 39            |

CROSS Band channels power setting

| Mode         | Frequency | Power Setting |
|--------------|-----------|---------------|
| 802.11-a     | 5720      | 37            |
| 802.11-n-20  | 5720      | 37            |
| 802.11-n-40  | 5710      | 38            |
| 802.11-ac-80 | 5690      | 39            |



**T310S Beamforming Mode**

| Mode         | Frequency | Power Setting |
|--------------|-----------|---------------|
| 802.11-a     | 5260      | 32            |
| 802.11-a     | 5280      | 32            |
| 802.11-a     | 5320      | 32            |
| 802.11-n-20  | 5260      | 32            |
| 802.11-n-20  | 5280      | 32            |
| 802.11-n-20  | 5320      | 32            |
| 802.11-n-40  | 5270      | 32            |
| 802.11-n-40  | 5310      | 32            |
| 802.11-ac-80 | 5290      | 34            |
|              |           |               |
| 802.11-a     | 5500      | 30            |
| 802.11-a     | 5580      | 31            |
| 802.11-a     | 5700      | 31            |
| 802.11-n-20  | 5500      | 31            |
| 802.11-n-20  | 5580      | 31            |
| 802.11-n-20  | 5700      | 31            |
| 802.11-n-40  | 5510      | 31            |
| 802.11-n-40  | 5590      | 31            |
| 802.11-n-40  | 5670      | 31            |
| 802.11-ac-80 | 5530      | 32            |
| 802.11-ac-80 | 5610      | 34            |

**CROSS Band channels power setting**

| Mode         | Frequency | Power Setting |
|--------------|-----------|---------------|
| 802.11-a     | 5720      | 31            |
| 802.11-n-20  | 5720      | 31            |
| 802.11-n-40  | 5710      | 31            |
| 802.11-ac-80 | 5690      | 32            |


**6.3 EUT Photos - External**




Top View




Bottom View

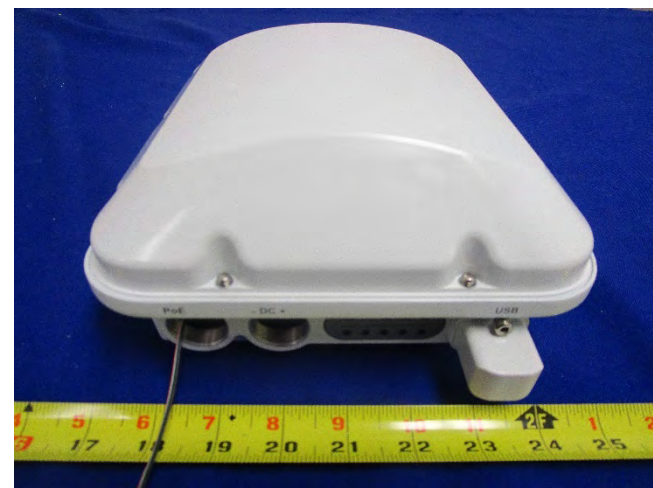


Front View

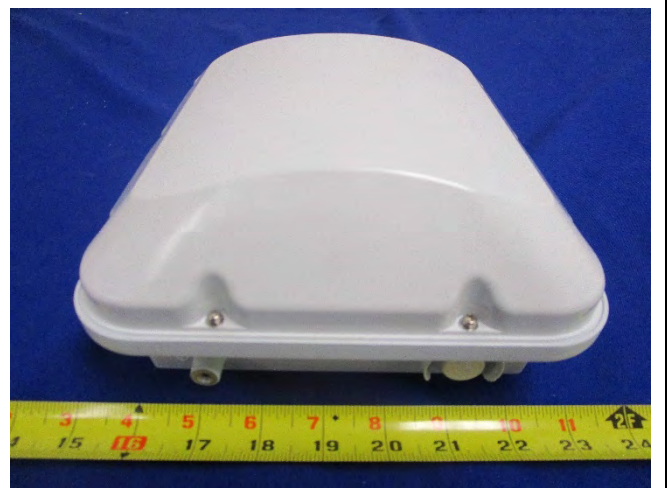

Rear View

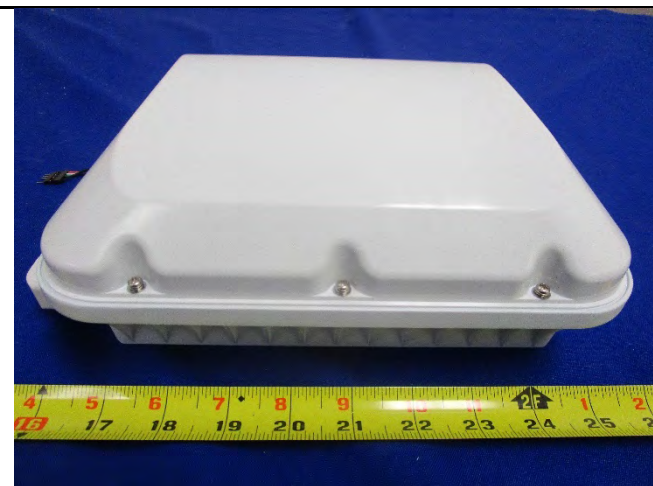

Right Side View

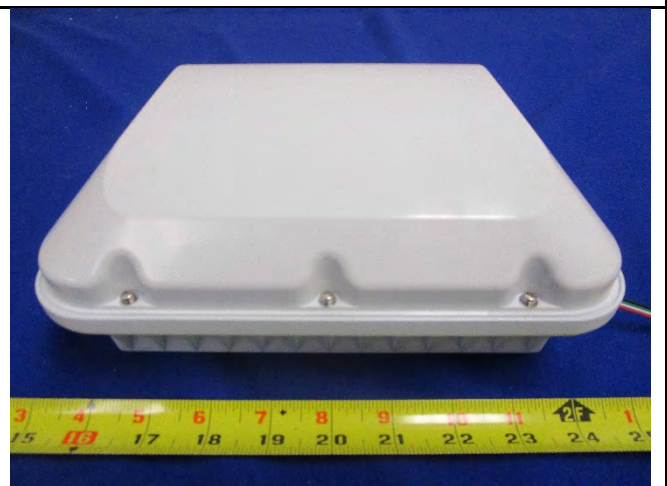


Left Side View


### 6.4 EUT Photos - Internal



EUT Case off View

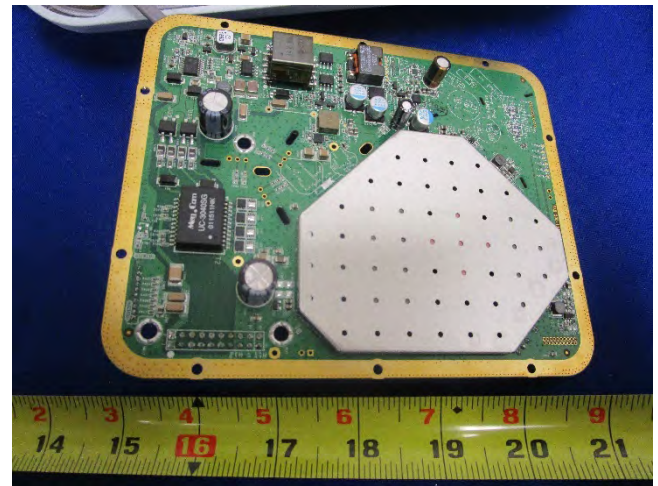


Modem Board Top View

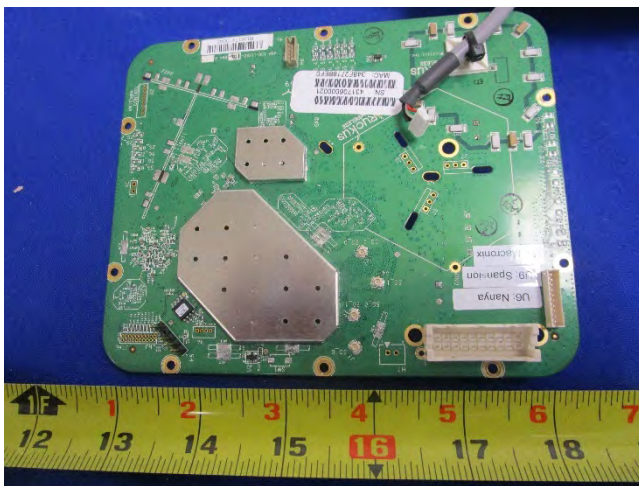


Modem Board Bottom View




EUT Case View

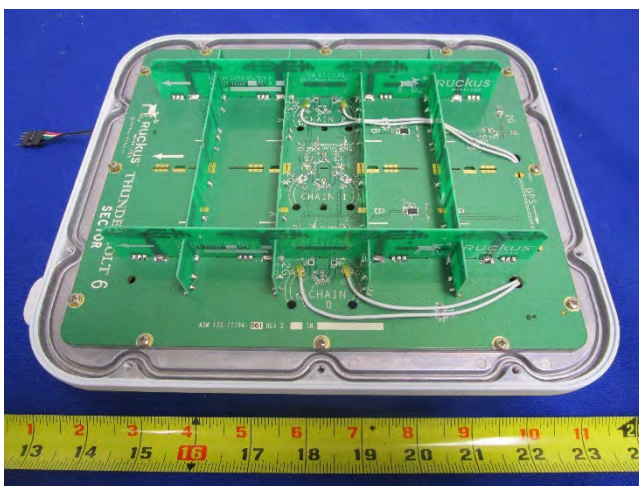


T310S Antenna Set View

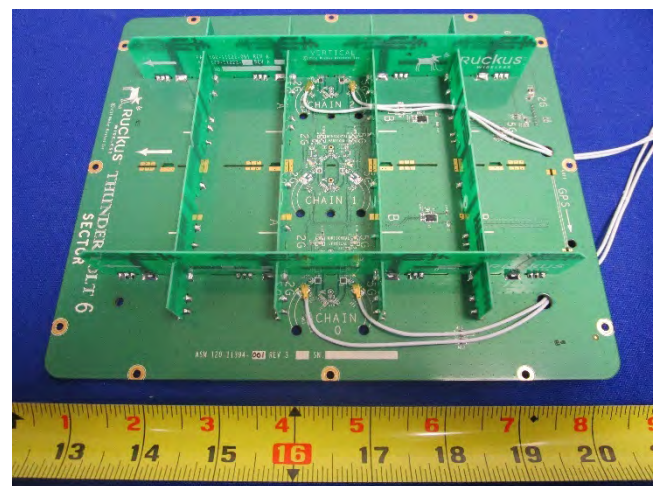


T310S Antenna Top View

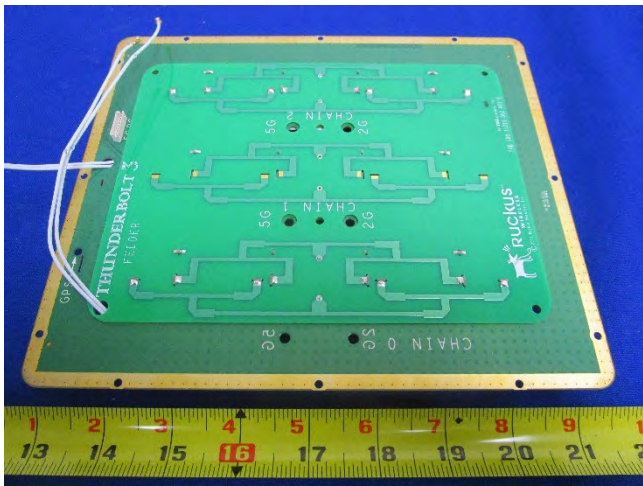


T310S Antenna Bottom View

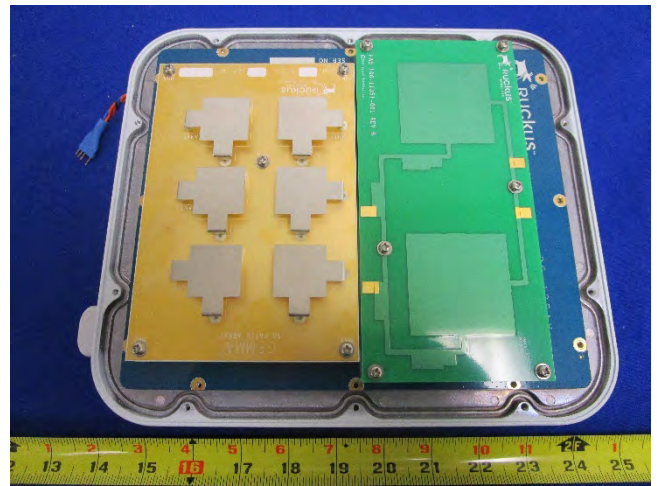


T310N Antenna Set View

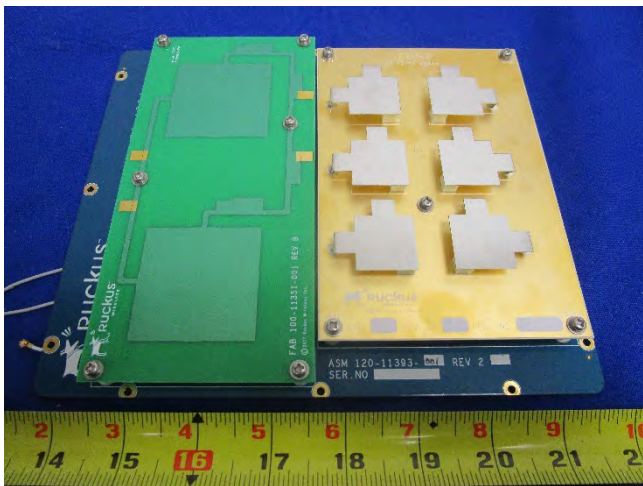


T310N Antenna Top View

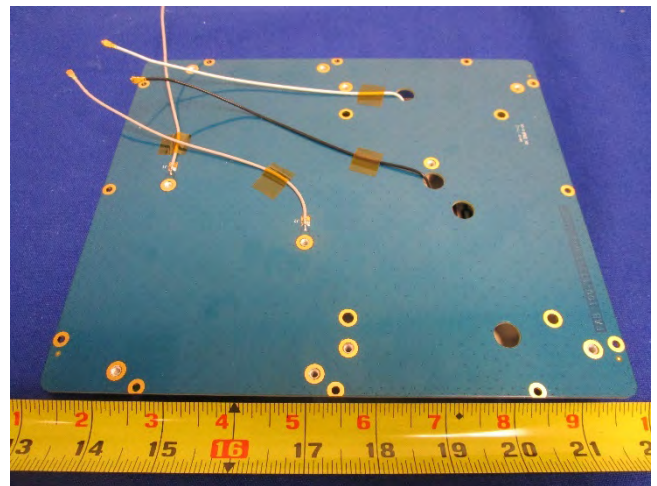


T310N Antenna Bottom View

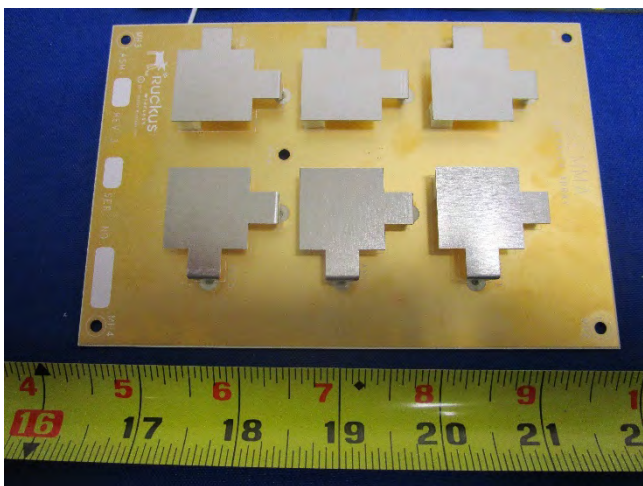


T310N Antenna Part1 Top View

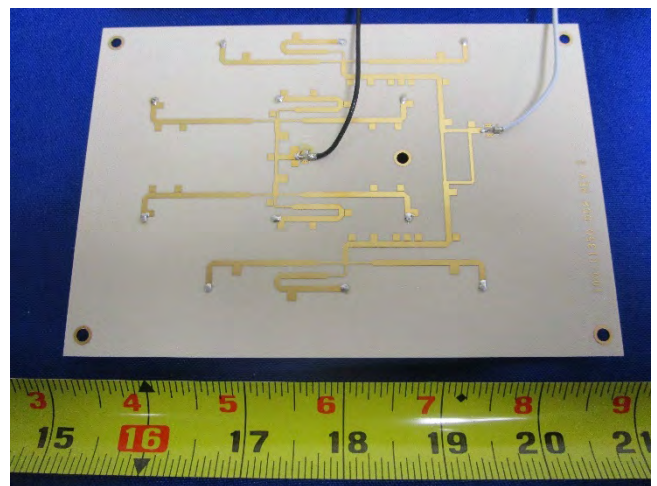

T310N Antenna Part1 Bottom View

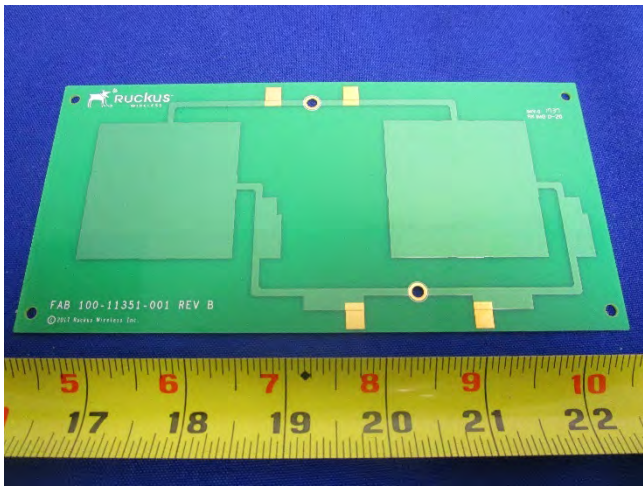


T310N Antenna Part2 Top View

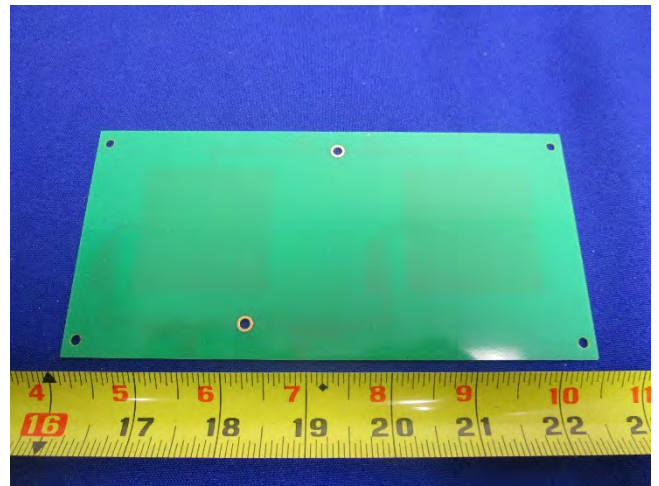

T310N Antenna Part2 Bottom View


## 6.5 Test Setup Photos

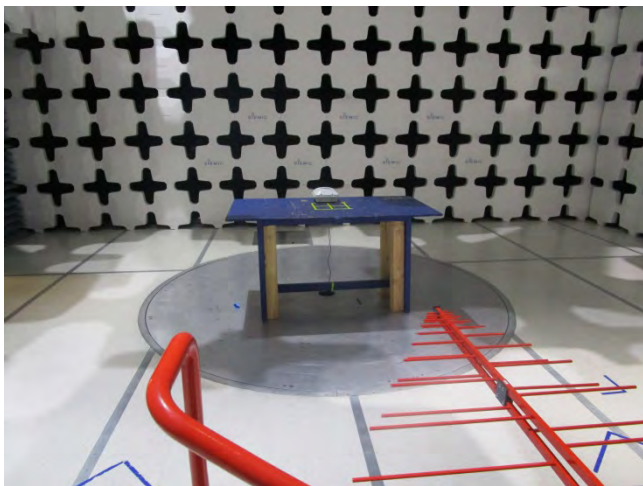

Radiated Emissions (<1GHz) – Front View



Radiated Emissions (<1GHz) – Rear View

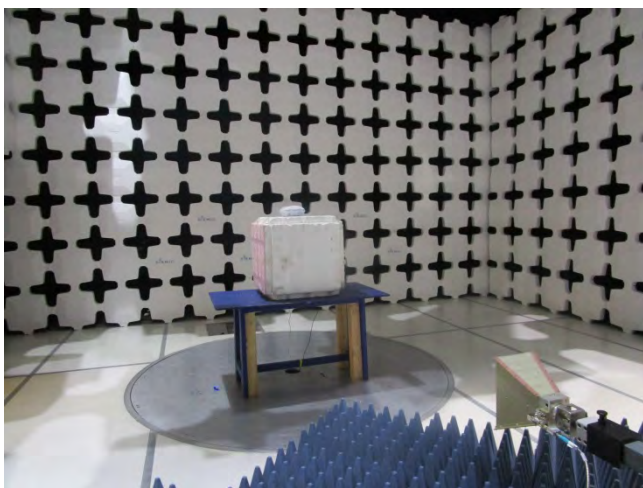

Radiated Emissions (>1GHz) – Front View



Radiated Emissions (>1GHz) – Rear View



Conducted Emissions - P.O.E Mode – Front View



Conducted Emissions - P.O.E Mode – Rear View



Conducted Emissions - Power Supply Mode – Front View



Conducted Emissions - Power Supply Mode – Rear View

## 7 Supporting Equipment/Software and cabling Description

### 7.1 Supporting Equipment

| Item | Supporting Equipment Description | Model       | Serial Number | Manufacturer | Note |
|------|----------------------------------|-------------|---------------|--------------|------|
| 1    | Laptop                           | VOSTRO 1520 | 26543939185   | Dell         | -    |
|      |                                  |             |               |              |      |
|      |                                  |             |               |              |      |

### 7.2 Cabling Description

| Item | Connection Start |          | Connection Stop              |          | Length / shielding Info |           | Note |
|------|------------------|----------|------------------------------|----------|-------------------------|-----------|------|
|      | From             | I/O Port | To                           | I/O Port | Length (m)              | Shielding |      |
| 1    | EUT              | RJ45     | Power Over Ethernet Injector | RJ45     | >3m                     | N/A       | -    |
| 2    | Laptop           | RJ45     | Power Over Ethernet Injector | RJ45     | >3m                     | N/A       |      |

### 7.3 Test Software Description

| Test Item  | Software       | Description  |
|------------|----------------|--|
| RF Testing | Command prompt | Set the EUT to transmit continuously in diferent test mode |
|            |                |  |
|            |                |  |



## 8 Test Summary

| Test Item                      | Test standard |           | Test Method/Procedure  | Pass / Fail  |
|--------------------------------|---------------|-----------|--|--|
| Restricted Band of Operation   | FCC           | 15.205    | ANSI C63.4 – 2014<br>789033 D02 General UNII Test Procedures New Rules v01 | <input checked="" type="checkbox"/> Pass<br><input type="checkbox"/> N/A |
| AC Conducted Emissions Voltage | FCC           | 15.207(a) | ANSI C63.4 – 2014  | <input checked="" type="checkbox"/> Pass<br><input type="checkbox"/> N/A |
| Antenna requirement            | FCC           | 15.203    | 15.203   | <input checked="" type="checkbox"/> Pass<br><input type="checkbox"/> N/A |

| Test Item                                 | Test standard   |                               | Test Method/Procedure  | Pass / Fail  |
|---|---|-------------------------------|--|--|
| 26 & 6 dB Emission Bandwidth              | FCC   | 15.407 (a) (2)                | 789033 D02 General UNII Test Procedures New Rules v01                      | <input checked="" type="checkbox"/> Pass<br><input type="checkbox"/> N/A |
| Maximum conducted Output Power            | FCC   | 15.407 (a) (2)                | 789033 D02 General UNII Test Procedures New Rules v01                      | <input checked="" type="checkbox"/> Pass<br><input type="checkbox"/> N/A |
| Power reduction (Antenna Gain > 6 dBi)    | FCC   | 15.407 (a) (2)                | -  | <input type="checkbox"/> Pass<br><input checked="" type="checkbox"/> N/A |
| Band Edge and Radiated Spurious Emissions | FCC   | 15.407(b)(2),<br>15.407(b)(6) | ANSI C63.4 – 2014<br>789033 D02 General UNII Test Procedures New Rules v01 | <input checked="" type="checkbox"/> Pass<br><input type="checkbox"/> N/A |
| Power Spectral Density                    | FCC   | 15.407 (a) (2)                | 789033 D02 General UNII Test Procedures New Rules v01                      | <input checked="" type="checkbox"/> Pass<br><input type="checkbox"/> N/A |
| Frequency Stability                       | FCC   | 15.407 (g)                    | -  | <input type="checkbox"/> Pass<br><input checked="" type="checkbox"/> N/A |
| Transmit Power Control (TPC)              | FCC   | 15.407 (h)(1)                 | -  | <input type="checkbox"/> Pass<br><input checked="" type="checkbox"/> N/A |
| User Manual                               | FCC   | -                             | -  | <input checked="" type="checkbox"/> Pass<br><input type="checkbox"/> N/A |
| Remark                                    | <ol style="list-style-type: none"> <li>All measurement uncertainties are not taken into consideration for all presented test result.</li> <li>The applicant shall ensure frequency stability by showing that an emission is maintained within the band of operation under all normal operating conditions as specified in the user's manual.</li> </ol> |                               |  |  |

## 9 Measurement Uncertainty

### 9.1 Conducted Emissions

The test is to measure the conducted emissions to the mains port of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the LISN
- Uncertainty of cables
- Uncertainty due to the mismatches
- Etc, see the below table for details

| Source of Uncertainty         | Value (dB) | Probability Distribution | Division | Sensitivity Coefficient | Expanded Uncertainty |
|-------------------------------|------------|--------------------------|----------|-------------------------|----------------------|
| Receiver Reading              | 0.12       | Rectangular              | 1.732    | 1                       | 0.069284             |
| Cable Insertion Loss          | 0.21       | Normal                   | 2        | 1                       | 0.105                |
| Filter Insertion Loss         | 0.25       | Normal                   | 2        | 1                       | 0.125                |
| LISN Insertion Loss           | 0.40       | Normal                   | 2        | 1                       | 0.20                 |
| Receiver CW accuracy          | 0.5        | Rectangular              | 1.732    | 1                       | 0.2886836            |
| Pulse Amplitude Response      | 1.5        | Rectangular              | 1.732    | 1                       | 0.86605081           |
| PRF Response                  | 1.5        | Rectangular              | 1.732    | 1                       | 0.86605081           |
| Mismatch LISN - Receiver      | 0.25       | U-Shape                  | 1.414    | 1                       | 0.1768033            |
| LISN Impedance                | 2.5        | Triangular               | 2.449    | 1                       | 1.0208248            |
| Combined Standard Uncertainty |            |                          |          |                         | 1.928133             |
| Expanded Uncertainty (K=2)    |            |                          |          |                         | 3.856266             |

The total derived measurement uncertainty is +/- 3.86 dB.

### 9.2 Radiated Emissions (30MHz to 1GHz)

The test is to measure the radiated emissions of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the antenna
- Uncertainty of cables
- Uncertainty due to the mismatches
- NSA Calibration
- Etc., details see the below table

| Source of Uncertainty         | Value (dB) | Probability Distribution | Division | Sensitivity Coefficient | Expanded Uncertainty |
|-------------------------------|------------|--------------------------|----------|-------------------------|----------------------|
| Receiver Reading              | 0.12       | Rectangular              | 1.732    | 1                       | 0.069284             |
| Cable Insertion Loss          | 0.21       | Normal                   | 2        | 1                       | 0.105                |
| Filter Insertion Loss         | 0.25       | Normal                   | 2        | 1                       | 0.125                |
| Antenna Factor                | 0.65       | Normal                   | 2        | 1                       | 0.325                |
| Receiver CW accuracy          | 0.5        | Rectangular              | 1.732    | 1                       | 0.2886836            |
| Pulse Amplitude Response      | 1.5        | Rectangular              | 1.732    | 1                       | 0.86605081           |
| PRF Response                  | 1.5        | Rectangular              | 1.732    | 1                       | 0.86605081           |
| Mismatch Filter - Receiver    | 0.25       | U-Shape                  | 1.414    | 1                       | 0.1768033            |
| NSA Calibration               | 4.0        | U-Shape                  | 1.414    | 1                       | 2.8288543            |
| Combined Standard Uncertainty |            |                          |          |                         | 3.0059131            |
| Expanded Uncertainty (K=2)    |            |                          |          |                         | 6.0118262            |

The total derived measurement uncertainty is +/- 6.00 dB.

### 9.3 Radiated Emissions (1GHz to 40GHz)

The test is to measure the radiated emissions of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the antenna
- Uncertainty of cables
- Uncertainty due to the mismatches
- VSWR Calibration
- Etc., details see the below table

| Source of Uncertainty         | Value (dB) | Probability Distribution | Division | Sensitivity Coefficient | Expanded Uncertainty |
|-------------------------------|------------|--------------------------|----------|-------------------------|----------------------|
| Receiver Reading              | 0.12       | Rectangular              | 1.732    | 1                       | 0.0692840            |
| Cable Insertion Loss          | 0.21       | Normal                   | 2        | 1                       | 0.1050000            |
| Filter Insertion Loss         | 0.25       | Normal                   | 2        | 1                       | 0.1250000            |
| Antenna Factor                | 0.65       | Normal                   | 2        | 1                       | 0.3250000            |
| Receiver CW accuracy          | 0.5        | Rectangular              | 1.732    | 1                       | 0.2886836            |
| Pulse Amplitude Response      | 1.5        | Rectangular              | 1.732    | 1                       | 0.8660508            |
| PRF Response                  | 1.5        | Rectangular              | 1.732    | 1                       | 0.8660508            |
| Mismatch Filter - Receiver    | 0.25       | U-Shape                  | 1.414    | 1                       | 0.1768033            |
| VSWR Calibration              | 2.0        | U-Shape                  | 1.414    | 1                       | 1.4144272            |
| Combined Standard Uncertainty |            |                          |          |                         | 4.2363               |
| Expanded Uncertainty (K=2)    |            |                          |          |                         | 8.4726               |

The total derived measurement uncertainty is +/- 8.47 dB.

### 9.4 RF conducted measurement

The test is to measure the RF output power from the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the Reference Level Uncertainty
- Uncertainty of variable attenuators
- Uncertainty of cables
- Uncertainty due to the mismatches

| Source of Uncertainty         | Value (dB) | Probability Distribution | Division | Sensitivity Coefficient | Expanded Uncertainty |
|-------------------------------|------------|--------------------------|----------|-------------------------|----------------------|
| Reference Level               | 0.12       | Rectangular              | 1.732    | 1                       | 0.069284             |
| Cable Insertion Loss          | 0.21       | Normal                   | 2        | 1                       | 0.105                |
| Attenuator                    | 0.25       | Normal                   | 2        | 1                       | 0.125                |
| Mismatch                      | 0.25       | U-Shape                  | 1.414    | 1                       | 0.1768033            |
| Combined Standard Uncertainty |            |                          |          |                         | 0.476087             |
| Expanded Uncertainty (K=2)    |            |                          |          |                         | 0.952174             |

The total derived measurement uncertainty is +/- 0.95 dB.

## 10 Measurements, Examination and Derived Results

### 10.1 Antenna Requirement

| Spec   | Requirement  | Applicable |
|--------|--|------------|
| 15.203 | An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded. | ☒          |
| Remark | N/A  |            |
| Result | ☒ Pass      ☐ Fail   |            |

Test Data     Yes                       N/A  
 Test Plot     Yes (See below)             N/A


### Antenna Connector Construction

|                        |   |
|------------------------|---|
| Antenna Type           | T310S: Internal dipole array<br>T310N: Internal patch array                                 |
| Antenna Gain (Peak)    | T310S: 5G: Highest Gain 8dBi<br>T310N: 5G: 12.6dBi for Vertical 13.5dBi for Horizontal      |
| Antenna Connector Type | U.FL  |
| Note                   | The antenna used U.FL antenna connectors which is a unique type which meet the requirement. |

## 10.2 Conducted Emissions

### Conducted Emission Limit

| Frequency ranges (MHz) | Limit (dBuV) |         |
|------------------------|--------------|---------|
|                        | QP           | Average |
| 0.15 ~ 0.5             | 66 – 56      | 56 – 46 |
| 0.5 ~ 5                | 56           | 46      |
| 5 ~ 30                 | 60           | 50      |
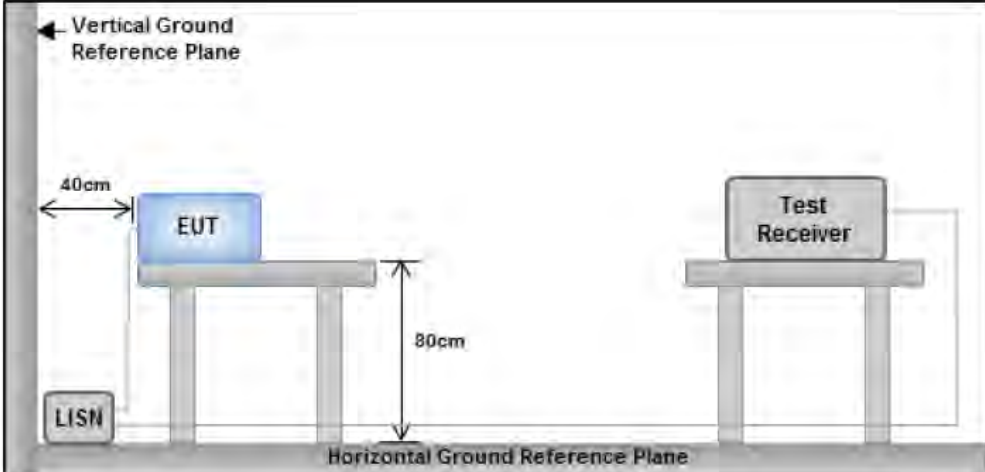
| Spec       | Item | Requirement   | Applicable                          |
|------------|------|---|-------------------------------------|
| 15.207(a)  | a)   | For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequency ranges.   | <input checked="" type="checkbox"/> |
| Test Setup |      |  <p>Note: 1. Support units were connected to second LISN.<br/>2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes</p>   |                                     |
| Procedure  |      | <ul style="list-style-type: none"> <li>- The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B.</li> <li>- The power supply for the EUT was fed through a 50<math>\Omega</math>/50<math>\mu</math>H EUT LISN, connected to filtered mains.</li> <li>- The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.</li> <li>- All other supporting equipment was powered separately from another main supply.</li> </ul> |                                     |
| Remark     |      | EUT was tested in two modes of operations: (1) P.O.E Mode; (2) Power Supply Mode  |                                     |
| Result     |      | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail  |                                     |


Test Data     Yes                       N/A

Test Plot     Yes (See below)               N/A

Test was done by Shuo Zhang at Conducted Emission test site.

### Conducted Emission Test Results


|                           |                               |      |         |   |
|---------------------------|-------------------------------|------|---------|---|
| Test specification:       | Conducted Emissions           |      |         |   |
| Environmental Conditions: | Temp(°C):                     | 21   | Result: | <input checked="" type="checkbox"/> Pass<br><br><input type="checkbox"/> Fail |
|                           | Humidity (%):                 | 42   |         |   |
|                           | Atmospheric(mbar):            | 1021 |         |   |
| Mains Power:              | 120Vac, 60Hz                  |      |         |   |
| Tested by:                | Shuo Zhang                    |      |         |   |
| Test Date:                | 11/13/2017                    |      |         |   |
| Remarks                   | Conducted @ Live – P.O.E Mode |      |         |   |

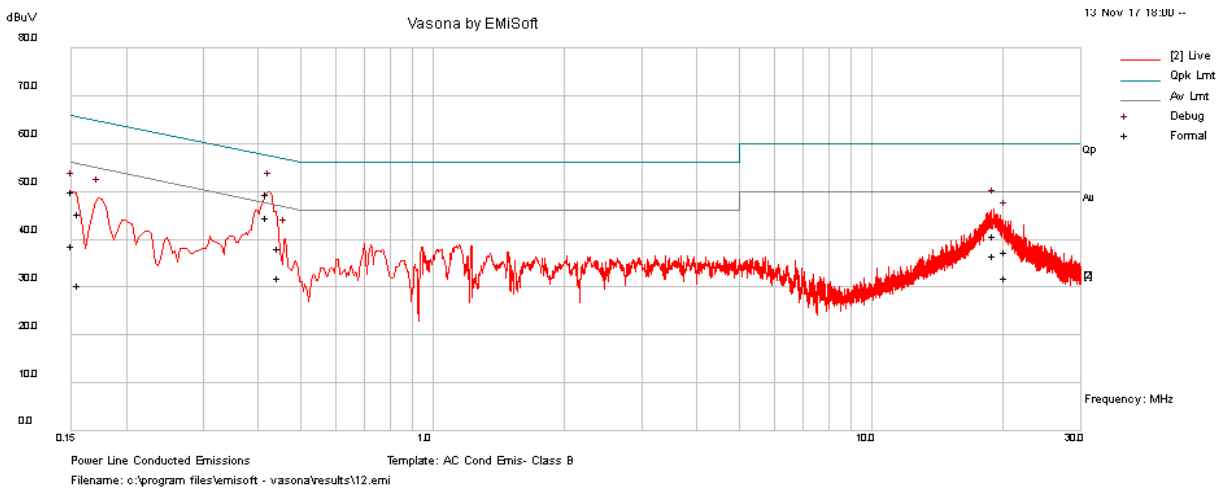

| Frequency (MHz) | Raw (dBuV) | Cable Loss (dB) | Factors (dB) | Level (dBuV) | Measurement Type | Line / Neutral | Limit (dBuV) | Margin (dB) | Pass /Fail |
|-----------------|------------|-----------------|--------------|--------------|------------------|----------------|--------------|-------------|------------|
| 0.42            | 39.36      | 9.33            | 0.69         | 49.37        | Quasi Peak       | Live           | 57.48        | -8.11       | Pass       |
| 19.08           | 30.78      | 9.38            | 0.64         | 40.81        | Quasi Peak       | Live           | 60           | -19.19      | Pass       |
| 0.15            | 38.78      | 9.33            | 1.74         | 49.84        | Quasi Peak       | Live           | 65.99        | -16.15      | Pass       |
| 0.16            | 34.22      | 9.33            | 1.67         | 45.22        | Quasi Peak       | Live           | 65.69        | -20.47      | Pass       |
| 20.24           | 27.4       | 9.39            | 0.66         | 37.45        | Quasi Peak       | Live           | 60           | -22.55      | Pass       |
| 0.44            | 28.08      | 9.33            | 0.67         | 38.08        | Quasi Peak       | Live           | 56.98        | -18.91      | Pass       |
| 0.42            | 34.58      | 9.33            | 0.69         | 44.59        | Average          | Live           | 47.48        | -2.9        | Pass       |
| 19.08           | 26.58      | 9.38            | 0.64         | 36.61        | Average          | Live           | 50           | -13.39      | Pass       |
| 0.15            | 27.59      | 9.33            | 1.74         | 38.65        | Average          | Live           | 55.99        | -17.34      | Pass       |
| 0.16            | 19.31      | 9.33            | 1.67         | 30.3         | Average          | Live           | 55.69        | -25.39      | Pass       |
| 20.24           | 21.81      | 9.39            | 0.66         | 31.86        | Average          | Live           | 50           | -18.14      | Pass       |
| 0.44            | 21.9       | 9.33            | 0.67         | 31.89        | Average          | Live           | 46.98        | -15.09      | Pass       |


### Conducted Emission Test Results

|                           |                                  |      |  |         |   |
|---------------------------|----------------------------------|------|--|---------|---|
| Test specification:       | Conducted Emissions              |      |  | Result: | <input checked="" type="checkbox"/> Pass<br><input type="checkbox"/> Fail |
| Environmental Conditions: | Temp(°C):                        | 21   |  |         |   |
|                           | Humidity (%):                    | 42   |  |         |   |
|                           | Atmospheric(mbar):               | 1021 |  |         |   |
| Mains Power:              | 120Vac, 60Hz                     |      |  |         |   |
| Tested by:                | Shuo Zhang                       |      |  |         |   |
| Test Date:                | 11/13/2017                       |      |  |         |   |
| Remarks                   | Conducted @ Neutral - P.O.E Mode |      |  |         |   |

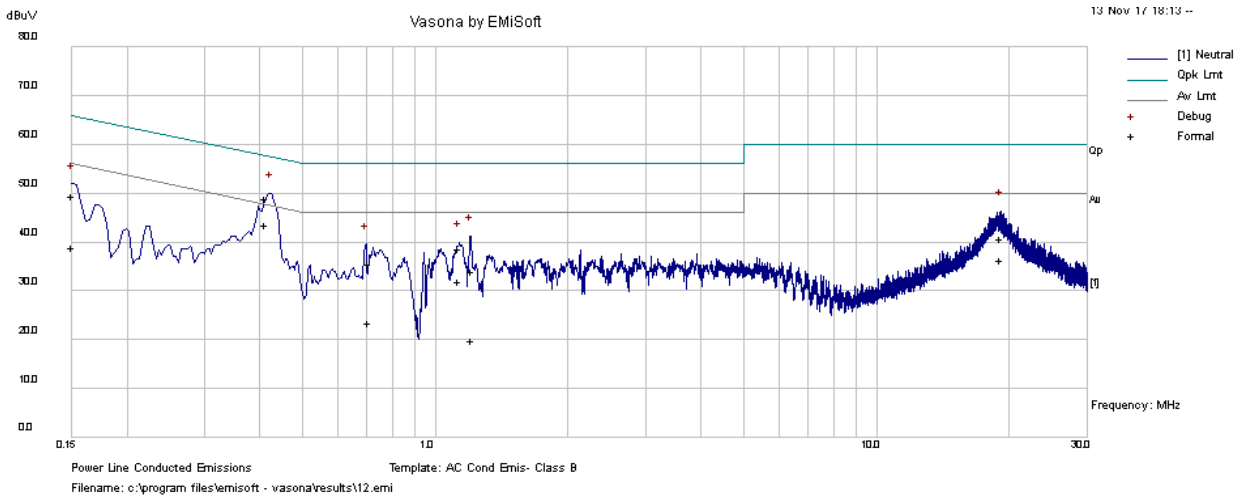

| Frequency (MHz) | Raw (dBuV) | Cable Loss (dB) | Factors (dB) | Level (dBuV) | Measurement Type | Line / Neutral | Limit (dBuV) | Margin (dB) | Pass /Fail |
|-----------------|------------|-----------------|--------------|--------------|------------------|----------------|--------------|-------------|------------|
| 0.41            | 38.91      | 9.33            | 0.69         | 48.93        | Quasi Peak       | Neutral        | 57.61        | -8.68       | Pass       |
| 19.11           | 30.7       | 9.38            | 0.64         | 40.73        | Quasi Peak       | Neutral        | 60           | -19.27      | Pass       |
| 0.15            | 38.48      | 9.33            | 1.74         | 49.55        | Quasi Peak       | Neutral        | 66           | -16.45      | Pass       |
| 1.21            | 24.11      | 9.33            | 0.52         | 33.96        | Quasi Peak       | Neutral        | 56           | -22.04      | Pass       |
| 1.13            | 28.92      | 9.33            | 0.52         | 38.77        | Quasi Peak       | Neutral        | 56           | -17.23      | Pass       |
| 0.71            | 25.6       | 9.33            | 0.56         | 35.48        | Quasi Peak       | Neutral        | 56           | -20.52      | Pass       |
| 0.41            | 33.48      | 9.33            | 0.69         | 43.5         | Average          | Neutral        | 47.61        | -4.11       | Pass       |
| 19.11           | 26.41      | 9.38            | 0.64         | 36.44        | Average          | Neutral        | 50           | -13.56      | Pass       |
| 0.15            | 27.8       | 9.33            | 1.74         | 38.87        | Average          | Neutral        | 56           | -17.13      | Pass       |
| 1.21            | 10.04      | 9.33            | 0.52         | 19.9         | Average          | Neutral        | 46           | -26.1       | Pass       |
| 1.13            | 22.05      | 9.33            | 0.52         | 31.9         | Average          | Neutral        | 46           | -14.1       | Pass       |
| 0.71            | 13.63      | 9.33            | 0.56         | 23.52        | Average          | Neutral        | 46           | -22.48      | Pass       |

|                           |                                      |      |         |   |
|---------------------------|--------------------------------------|------|---------|---|
| Test specification:       | Conducted Emissions                  |      |         |   |
| Environmental Conditions: | Temp(°C):                            | 21   | Result: | <input checked="" type="checkbox"/> Pass<br><input type="checkbox"/> Fail |
|                           | Humidity (%):                        | 42   |         |   |
|                           | Atmospheric(mbar):                   | 1021 |         |   |
| Mains Power:              | 120Vac, 60Hz                         |      |         |   |
| Tested by:                | Shuo Zhang                           |      |         |   |
| Test Date:                | 11/13/2017                           |      |         |   |
| Remarks                   | Conducted @ Live – Power Supply Mode |      |         |   |

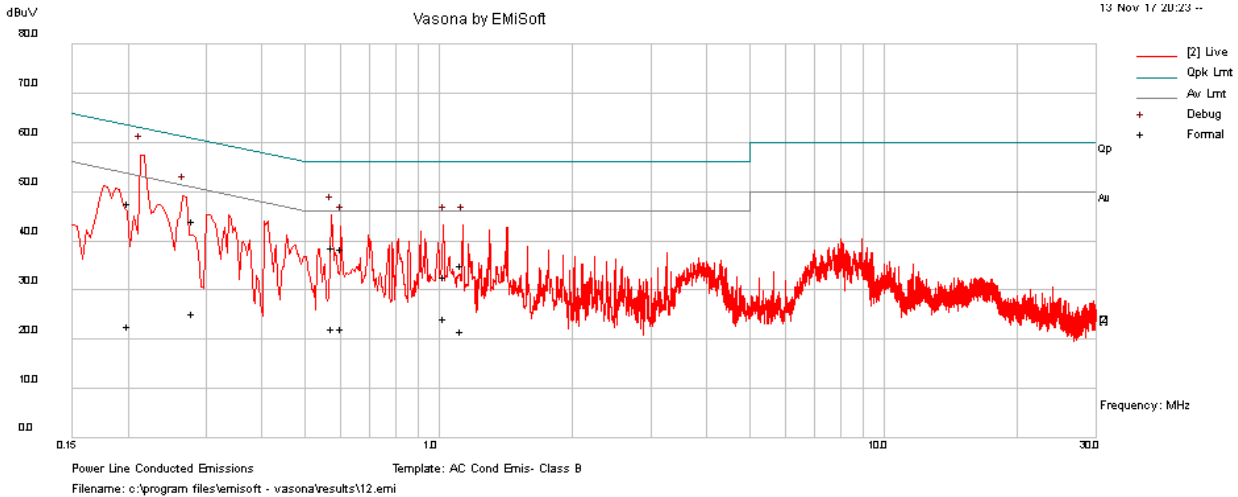


| Frequency (MHz) | Raw (dBuV) | Cable Loss (dB) | Factors (dB) | Level (dBuV) | Measurement Type | Line / Neutral | Limit (dBuV) | Margin (dB) | Pass /Fail |
|-----------------|------------|-----------------|--------------|--------------|------------------|----------------|--------------|-------------|------------|
| 0.20            | 37.07      | 9.32            | 1.25         | 47.64        | Quasi Peak       | Live           | 63.61        | -15.97      | Pass       |
| 0.58            | 28.71      | 9.33            | 0.6          | 38.64        | Quasi Peak       | Live           | 56           | -17.36      | Pass       |
| 0.28            | 33.7       | 9.32            | 0.91         | 43.93        | Quasi Peak       | Live           | 60.84        | -16.9       | Pass       |
| 1.03            | 22.74      | 9.33            | 0.53         | 32.6         | Quasi Peak       | Live           | 56           | -23.4       | Pass       |
| 1.13            | 25.31      | 9.33            | 0.52         | 35.17        | Quasi Peak       | Live           | 56           | -20.83      | Pass       |
| 0.61            | 28.34      | 9.33            | 0.59         | 38.26        | Quasi Peak       | Live           | 56           | -17.74      | Pass       |
| 0.20            | 12.19      | 9.32            | 1.25         | 22.76        | Average          | Live           | 53.61        | -30.84      | Pass       |
| 0.58            | 12.15      | 9.33            | 0.6          | 22.08        | Average          | Live           | 46           | -23.92      | Pass       |
| 0.28            | 14.95      | 9.32            | 0.91         | 25.18        | Average          | Live           | 50.84        | -25.66      | Pass       |
| 1.03            | 14.39      | 9.33            | 0.53         | 24.25        | Average          | Live           | 46           | -21.75      | Pass       |
| 1.13            | 11.75      | 9.33            | 0.52         | 21.6         | Average          | Live           | 46           | -24.4       | Pass       |
| 0.61            | 12.15      | 9.33            | 0.59         | 22.06        | Average          | Live           | 46           | -23.94      | Pass       |



### Conducted Emission Test Results


|                           |   |      |  |         |   |
|---------------------------|---|------|--|---------|---|
| Test specification:       | Conducted Emissions                     |      |  | Result: | <input checked="" type="checkbox"/> Pass<br><br><input type="checkbox"/> Fail |
| Environmental Conditions: | Temp(°C):                               | 21   |  |         |   |
|                           | Humidity (%):                           | 42   |  |         |   |
|                           | Atmospheric(mbar):                      | 1021 |  |         |   |
| Mains Power:              | 120Vac, 60Hz                            |      |  |         |   |
| Tested by:                | Shuo Zhang                              |      |  |         |   |
| Test Date:                | 11/13/2017                              |      |  |         |   |
| Remarks                   | Conducted @ Neutral - Power Supply Mode |      |  |         |   |

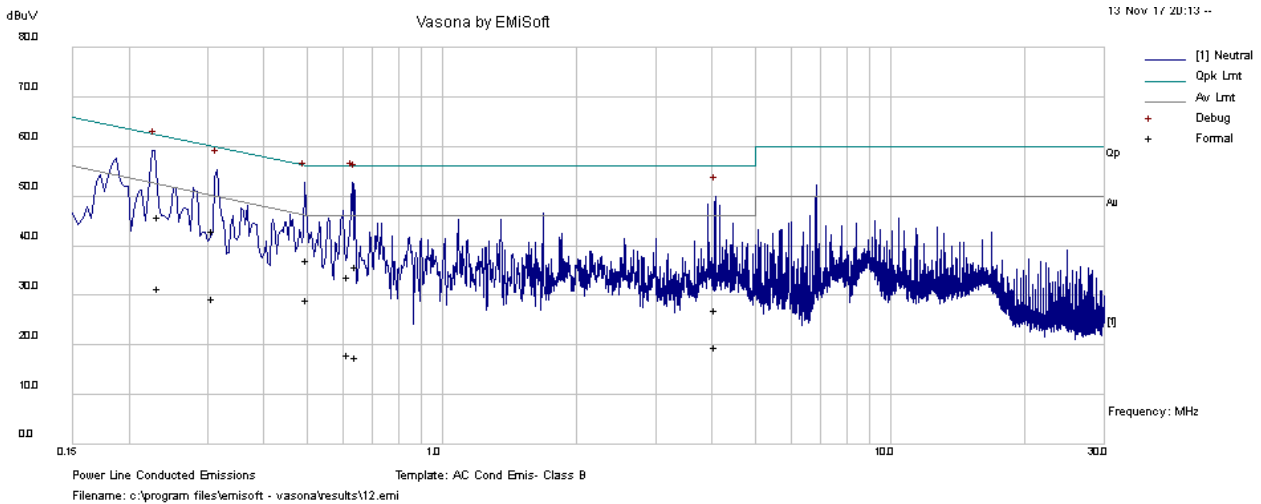

| Frequency (MHz) | Raw (dBuV) | Cable Loss (dB) | Factors (dB) | Level (dBuV) | Measurement Type | Line / Neutral | Limit (dBuV) | Margin (dB) | Pass /Fail |
|-----------------|------------|-----------------|--------------|--------------|------------------|----------------|--------------|-------------|------------|
| 0.23            | 35.39      | 9.32            | 1.08         | 45.79        | Quasi Peak       | Neutral        | 62.34        | -16.54      | Pass       |
| 0.50            | 27.17      | 9.33            | 0.63         | 37.12        | Quasi Peak       | Neutral        | 56.02        | -18.9       | Pass       |
| 0.62            | 23.9       | 9.33            | 0.58         | 33.82        | Quasi Peak       | Neutral        | 56           | -22.18      | Pass       |
| 0.64            | 25.91      | 9.33            | 0.58         | 35.82        | Quasi Peak       | Neutral        | 56           | -20.18      | Pass       |
| 0.31            | 32.81      | 9.32            | 0.84         | 42.97        | Quasi Peak       | Neutral        | 60.05        | -17.08      | Pass       |
| 4.06            | 17.26      | 9.34            | 0.5          | 27.1         | Quasi Peak       | Neutral        | 56           | -28.9       | Pass       |
| 0.23            | 20.99      | 9.32            | 1.08         | 31.39        | Average          | Neutral        | 52.34        | -20.94      | Pass       |
| 0.50            | 19.29      | 9.33            | 0.63         | 29.25        | Average          | Neutral        | 46.02        | -16.77      | Pass       |
| 0.62            | 8.22       | 9.33            | 0.58         | 18.14        | Average          | Neutral        | 46           | -27.86      | Pass       |
| 0.64            | 7.68       | 9.33            | 0.58         | 17.59        | Average          | Neutral        | 46           | -28.41      | Pass       |
| 0.31            | 19.22      | 9.32            | 0.84         | 29.38        | Average          | Neutral        | 50.05        | -20.67      | Pass       |
| 4.06            | 9.81       | 9.34            | 0.5          | 19.66        | Average          | Neutral        | 46           | -26.34      | Pass       |

### 10.3 6dB & 26 dB Bandwidth

Requirement(s):

| Spec           | Item  | Requirement   | Applicable   |
|----------------|---|---|--|
| § 15.407       | -   | 26 dB Emission BW: Report only for reference.               | <input checked="" type="checkbox"/>  |
|                | -   | 6 dB Emission BW: Report only for reference(Cross Band)     | <input checked="" type="checkbox"/>  |
|                | a) (2)  | 26 dB Emission BW: Report only for power limit calculation. | <input type="checkbox"/>   |
| Test Setup     |   |   |  |
| Test Procedure | <p>789033 D02 General UNII Test Procedures New Rules v01</p> <p><u>26dB Emission bandwidth measurement procedure (Other than 5.725-5.85 GHz)</u></p> <ul style="list-style-type: none"> <li>- Use the spectrum analyzer built-in measurement function to determine the 26dB BW. <ul style="list-style-type: none"> <li>o Set RBW = around 1% of emission bandwidth</li> <li>o Set VBW &gt; RBW</li> <li>o Detector = Peak</li> <li>o Trace mode = max hold</li> </ul> </li> <li>- Allow the trace to stabilize.</li> <li>- Capture the plot.</li> <li>- Repeat above steps for different test channel and other modulation type.</li> </ul> <p><u>6dB Emission bandwidth measurement procedure</u></p> <ul style="list-style-type: none"> <li>- Use the spectrum analyzer built-in measurement function to determine the 26dB BW. <ul style="list-style-type: none"> <li>o Set RBW = 100kHz</li> <li>o Set VBW &gt; 3RBW</li> <li>o Detector = Peak</li> <li>o Trace mode = max hold</li> </ul> </li> <li>- Allow the trace to stabilize.</li> <li>- Capture the plot.</li> <li>- Repeat above steps for different test channel and other modulation type.</li> </ul> |   |  |
| Test Date      | 11/11/2017-11/21/2017   | Environmental condition                                     | Temperature 23°C<br>Relative Humidity 42%<br>Atmospheric Pressure 1021mbar |
| Remark         | N/A   |   |  |
| Result         | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail  |   |  |

Test Data     Yes       N/A

Test Plot     Yes       N/A

Test was done by Cipher at RF test site.

T310N

26dB Bandwidth measurement result for 5.3GHz

| Type    | Test mode   | Freq (MHz) | CH   | Result (MHz) |
|---------|-------------|------------|------|--------------|
| 26dB BW | 802.11a     | 5260       | Low  | 18.63        |
|         | 802.11a     | 5280       | Mid  | 18.54        |
|         | 802.11a     | 5320       | High | 18.71        |
|         | 802.11n-20  | 5260       | Low  | 19.61        |
|         | 802.11n-20  | 5280       | Mid  | 19.56        |
|         | 802.11n-20  | 5320       | High | 19.47        |
|         | 802.11n-40  | 5270       | Low  | 38.90        |
|         | 802.11n-40  | 5310       | High | 38.97        |
|         | 802.11ac-80 | 5290       | Mid  | 81.67        |

26dB Bandwidth measurement result for 5.5GHz

| Type    | Test mode   | Freq (MHz)  | CH   | Result (MHz) |
|---------|-------------|-------------|------|--------------|
| 26dB BW | 802.11a     | 5500        | Low  | 18.56        |
|         | 802.11a     | 5580        | Mid  | 18.67        |
|         | 802.11a     | 5700        | High | 18.58        |
|         | 802.11n-20  | 5500        | Low  | 19.66        |
|         | 802.11n-20  | 5580        | Mid  | 19.61        |
|         | 802.11n-20  | 5700        | High | 19.64        |
|         | 802.11n-40  | 5510        | Low  | 38.70        |
|         | 802.11n-40  | 5590        | Mid  | 38.76        |
|         | 802.11n-40  | 5670        | High | 38.70        |
|         |             | 802.11ac-80 | 5530 | Low          |
|         | 802.11ac-80 | 5610        | High | 82.03        |

26dB Bandwidth measurement result for cross channels

| Type    | Test mode   | Freq (MHz) | CH    | Result (MHz) |
|---------|-------------|------------|-------|--------------|
| 26dB BW | 802.11a     | 5720       | CROSS | 16.37        |
|         | 802.11n-20  | 5720       | CROSS | 17.59        |
|         | 802.11n-40  | 5710       | CROSS | 35.67        |
|         | 802.11ac-80 | 5690       | CROSS | 76.33        |

6 Bandwidth measurement result for cross channels

| Type   | Test mode   | Freq (MHz) | CH    | Result (MHz) |
|--------|-------------|------------|-------|--------------|
| 6dB BW | 802.11a     | 5720       | CROSS | 18.52        |
|        | 802.11n-20  | 5720       | CROSS | 19.59        |
|        | 802.11n-40  | 5710       | CROSS | 38.60        |
|        | 802.11ac-80 | 5690       | CROSS | 81.61        |

T310S

26dB Bandwidth measurement result for 5.3GHz

| Type    | Test mode   | Freq (MHz) | CH   | Result (MHz) |
|---------|-------------|------------|------|--------------|
| 26dB BW | 802.11a     | 5260       | Low  | 18.62        |
|         | 802.11a     | 5280       | Mid  | 18.75        |
|         | 802.11a     | 5320       | High | 19.08        |
|         | 802.11n-20  | 5260       | Low  | 19.82        |
|         | 802.11n-20  | 5280       | Mid  | 19.93        |
|         | 802.11n-20  | 5320       | High | 19.62        |
|         | 802.11n-40  | 5270       | Low  | 38.83        |
|         | 802.11n-40  | 5310       | High | 39.46        |
|         | 802.11ac-80 | 5290       | Mid  | 82.11        |

26dB Bandwidth measurement result for 5.5GHz

| Type    | Test mode   | Freq (MHz)  | CH   | Result (MHz) |
|---------|-------------|-------------|------|--------------|
| 26dB BW | 802.11a     | 5500        | Low  | 18.70        |
|         | 802.11a     | 5580        | Mid  | 18.61        |
|         | 802.11a     | 5700        | High | 18.65        |
|         | 802.11n-20  | 5500        | Low  | 19.64        |
|         | 802.11n-20  | 5580        | Mid  | 19.65        |
|         | 802.11n-20  | 5700        | High | 20.06        |
|         | 802.11n-40  | 5510        | Low  | 38.99        |
|         | 802.11n-40  | 5590        | Mid  | 39.05        |
|         | 802.11n-40  | 5670        | High | 39.04        |
|         |             | 802.11ac-80 | 5530 | Low          |
|         | 802.11ac-80 | 5610        | High | 81.88        |


26dB Bandwidth measurement result for cross channels

| Type    | Test mode   | Freq (MHz) | CH    | Result (MHz) |
|---------|-------------|------------|-------|--------------|
| 26dB BW | 802.11a     | 5720       | CROSS | 18.90        |
|         | 802.11n-20  | 5720       | CROSS | 19.75        |
|         | 802.11n-40  | 5710       | CROSS | 39.42        |
|         | 802.11ac-80 | 5690       | CROSS | 81.70        |


6 Bandwidth measurement result for cross channels

| Type   | Test mode   | Freq (MHz) | CH    | Result (MHz) |
|--------|-------------|------------|-------|--------------|
| 6dB BW | 802.11a     | 5720       | CROSS | 16.37        |
|        | 802.11n-20  | 5720       | CROSS | 17.60        |
|        | 802.11n-40  | 5710       | CROSS | 35.66        |
|        | 802.11ac-80 | 5690       | CROSS | 76.36        |



T310N  
26dB Bandwidth Test Plots  
W53:

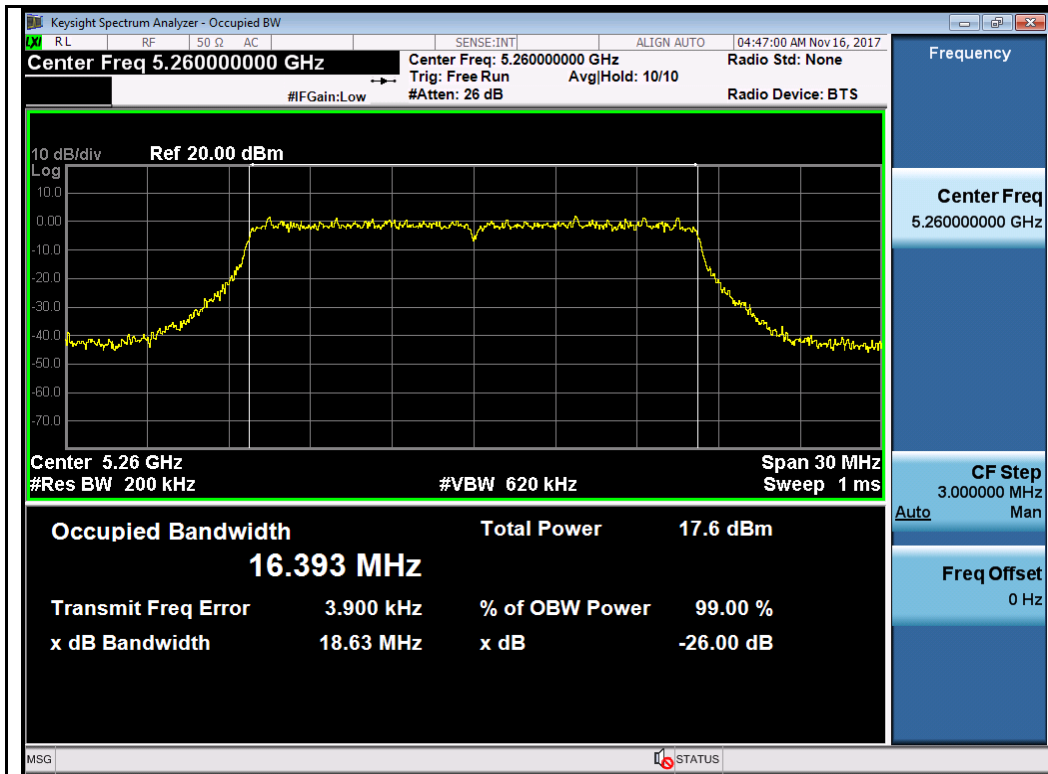


802.11a-5260MHz

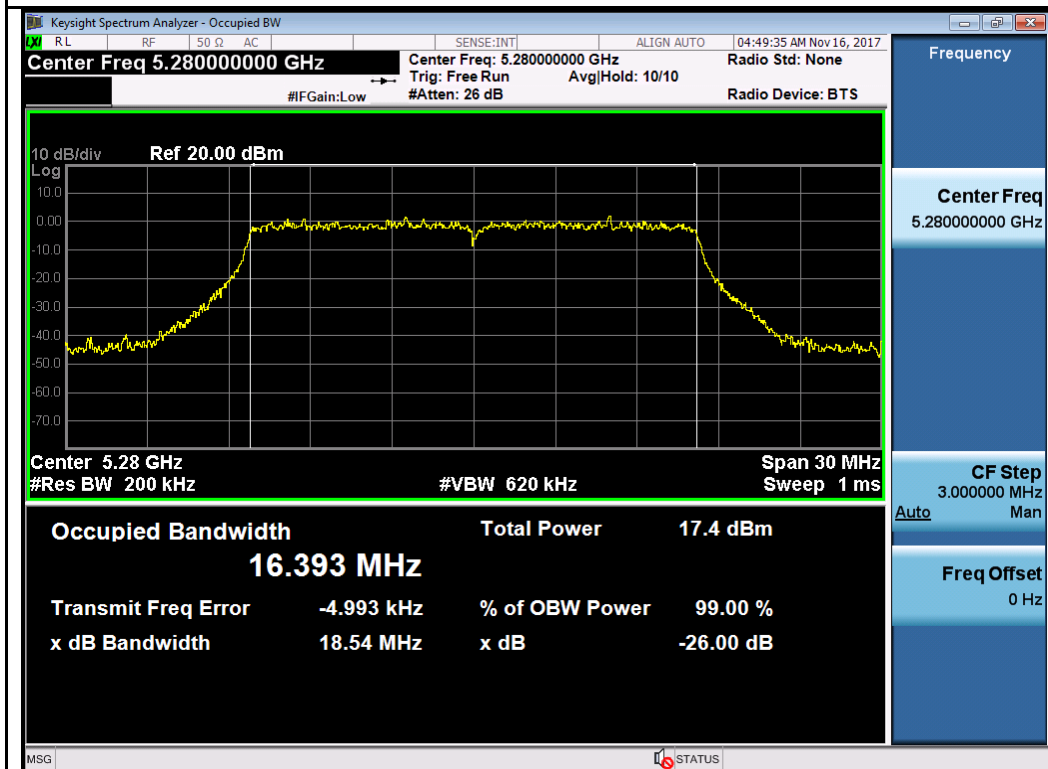


802.11a-5280MHz

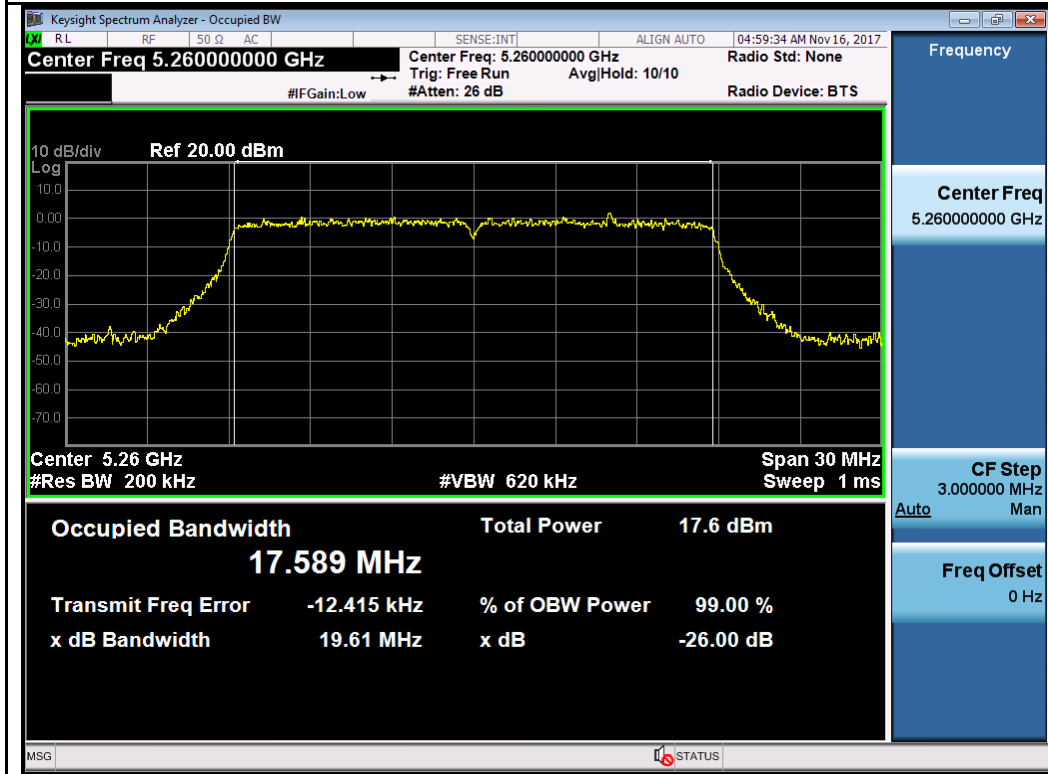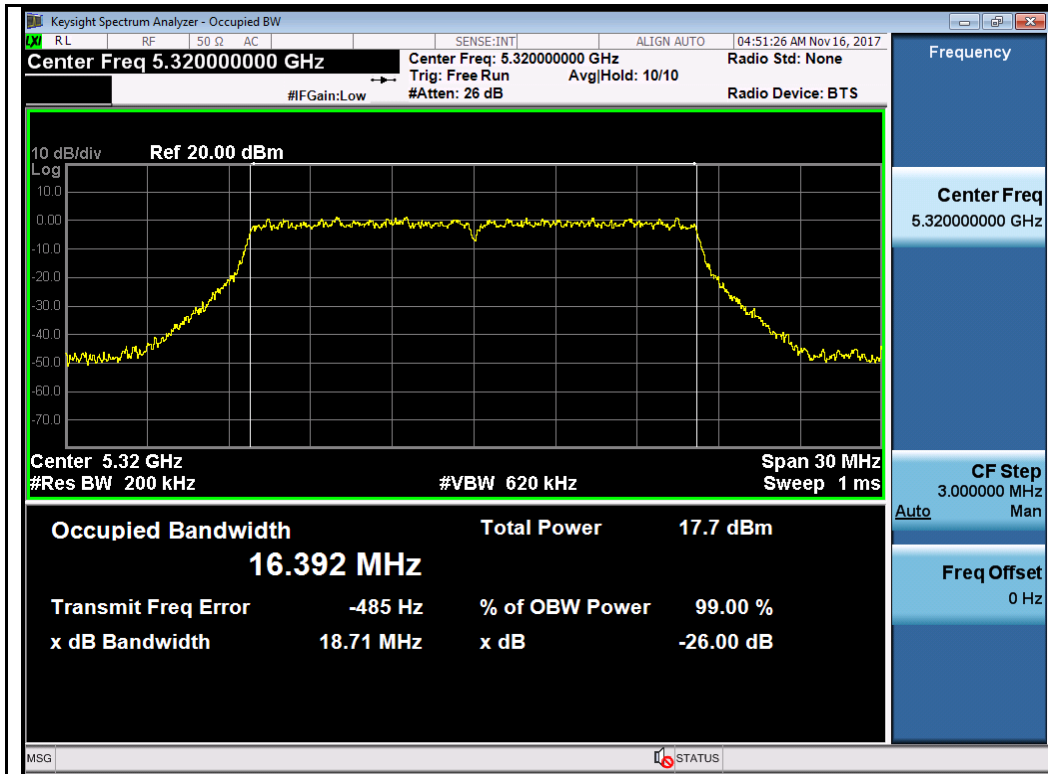




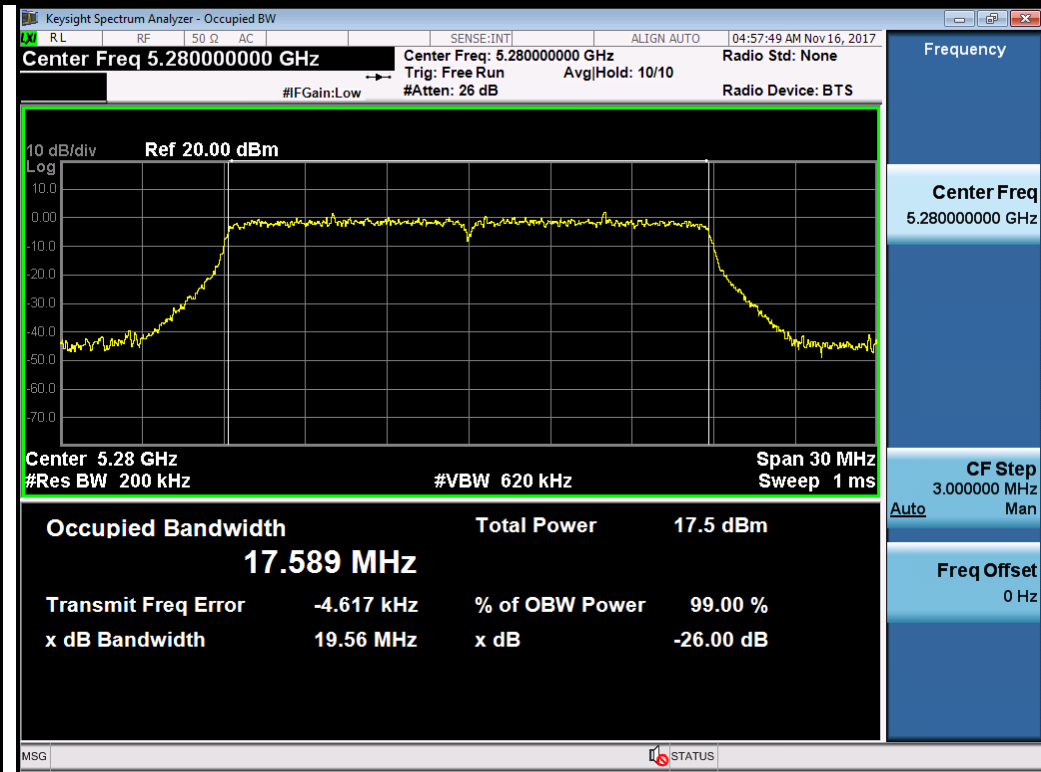


802.11n-HT20-5280MHz

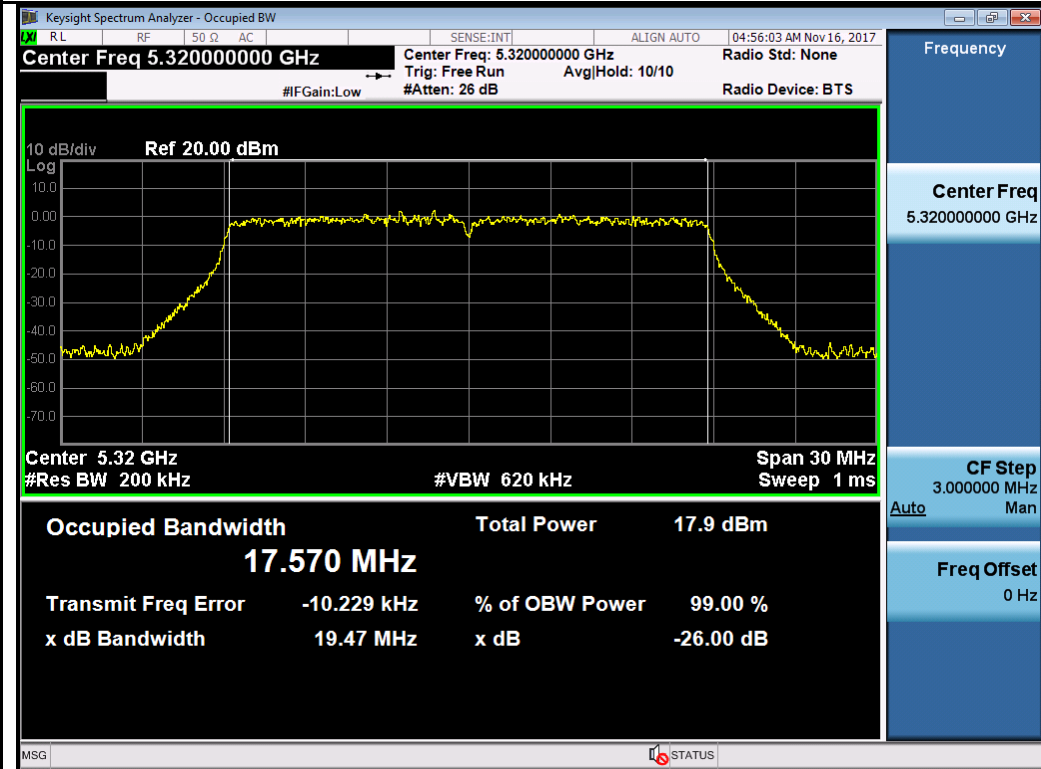


802.11n-HT20-5320MHz

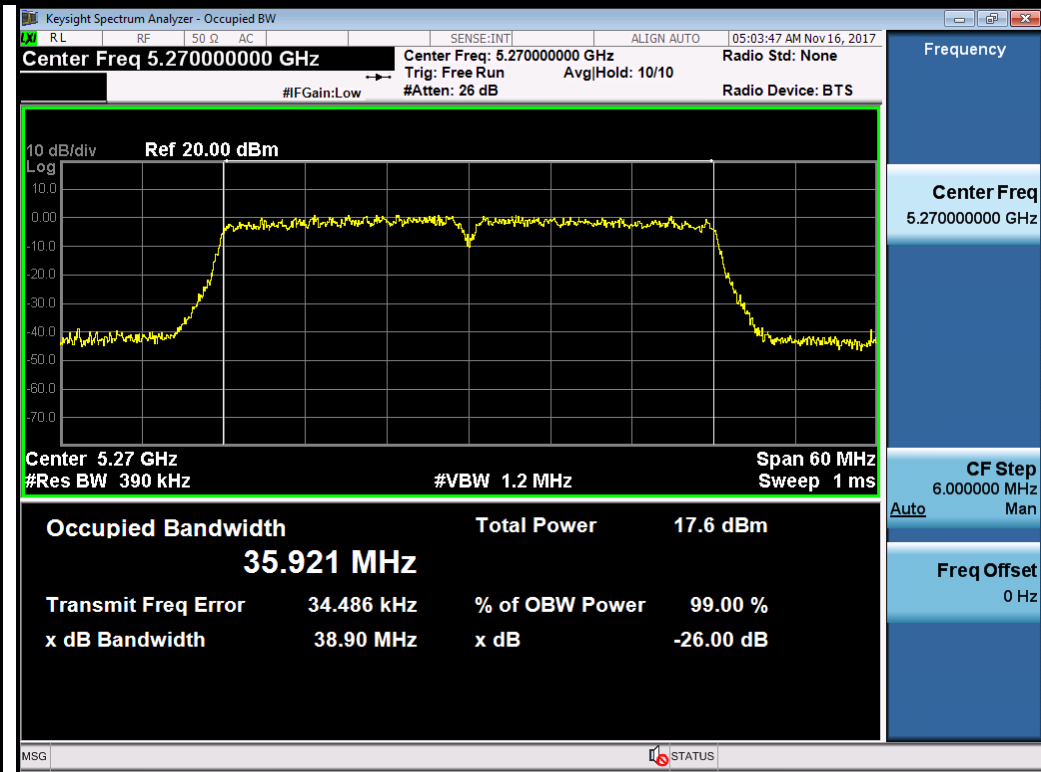


802.11n-HT40-5270MHz

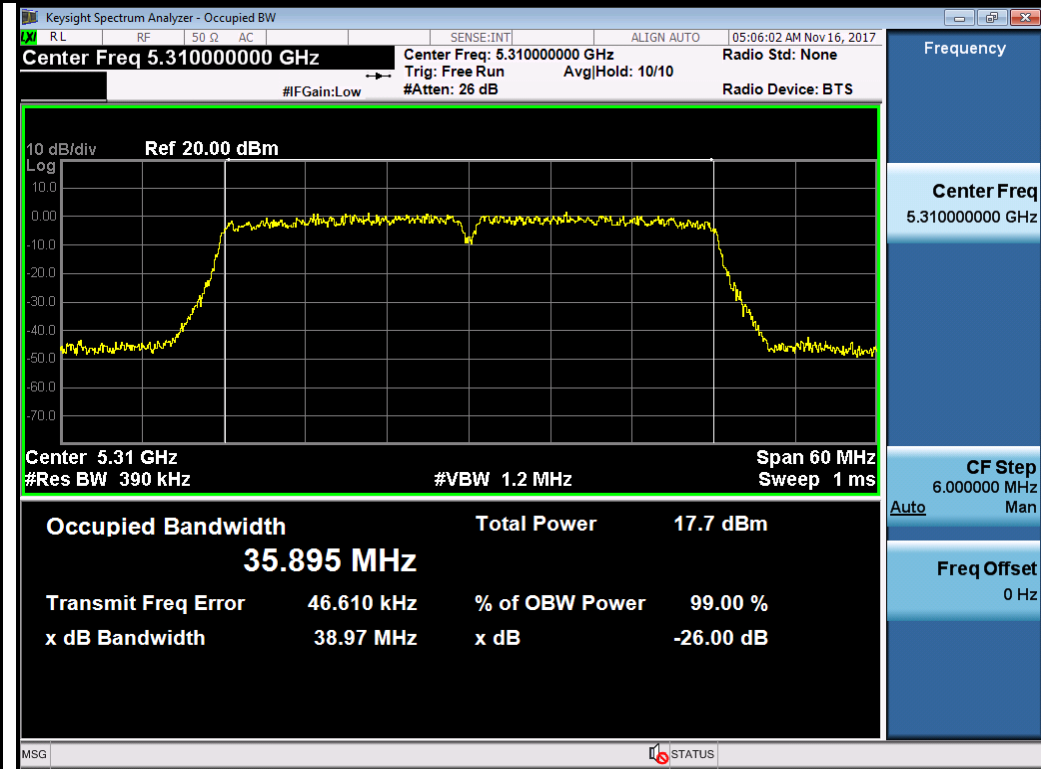


802.11n-HT40-5310MHz

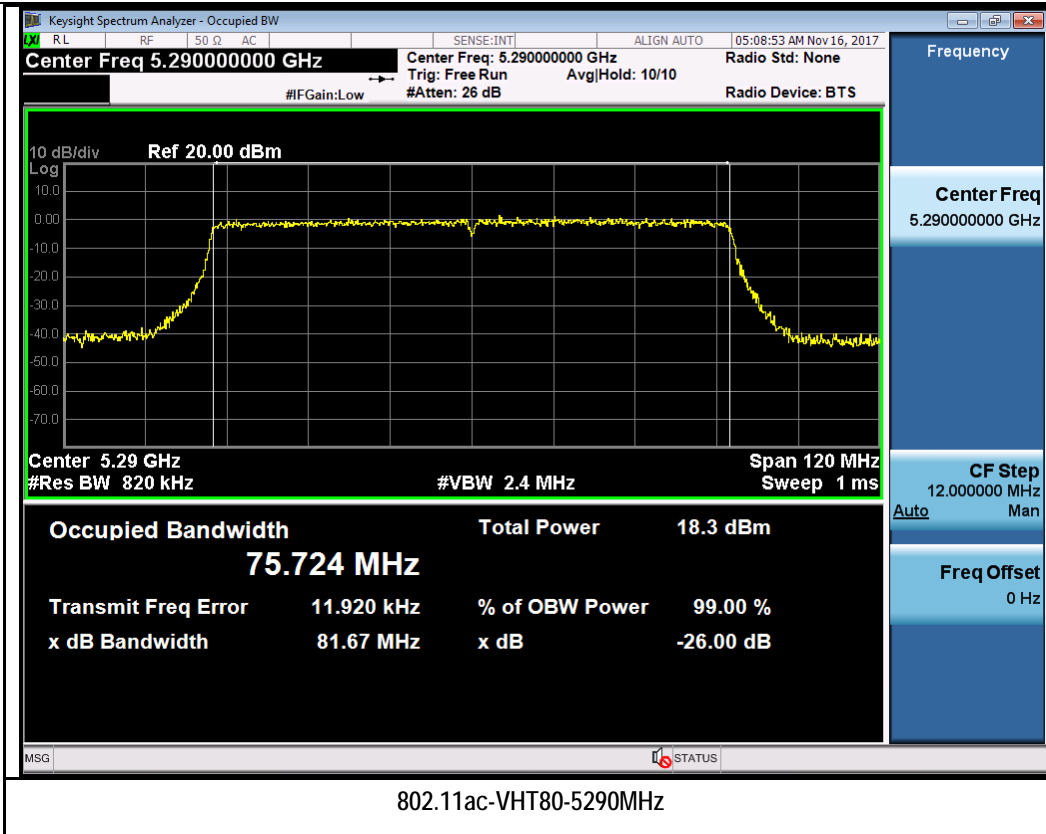


W56:

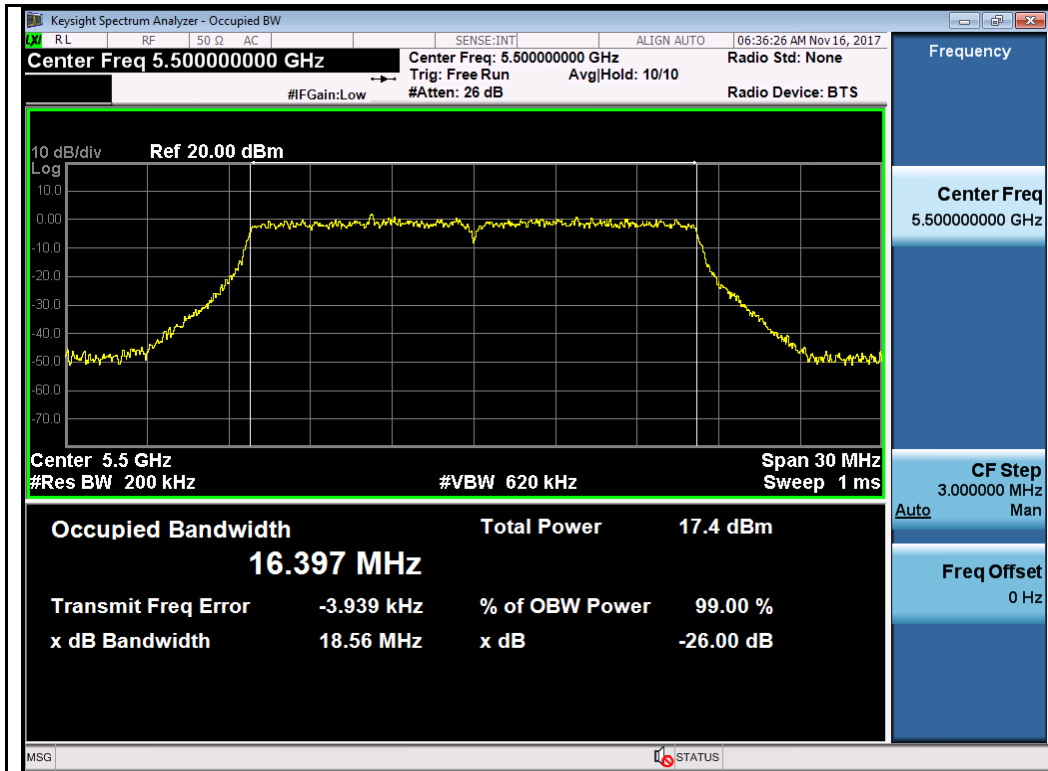


802.11a-5500MHz

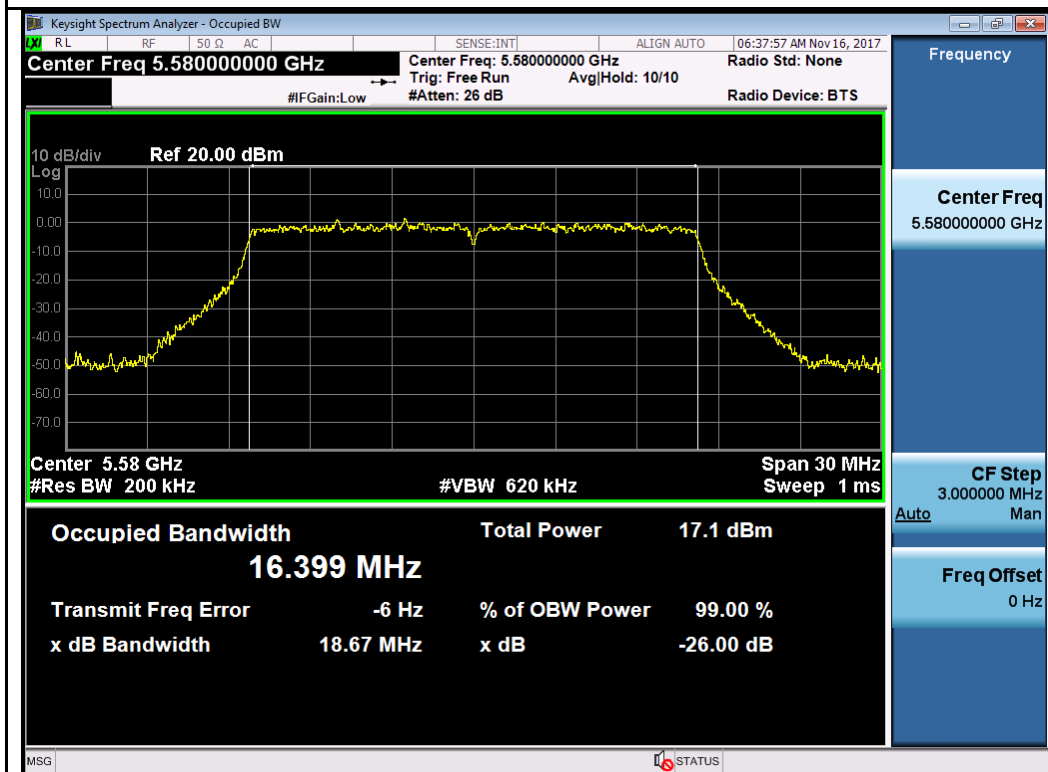


802.11a-5580MHz

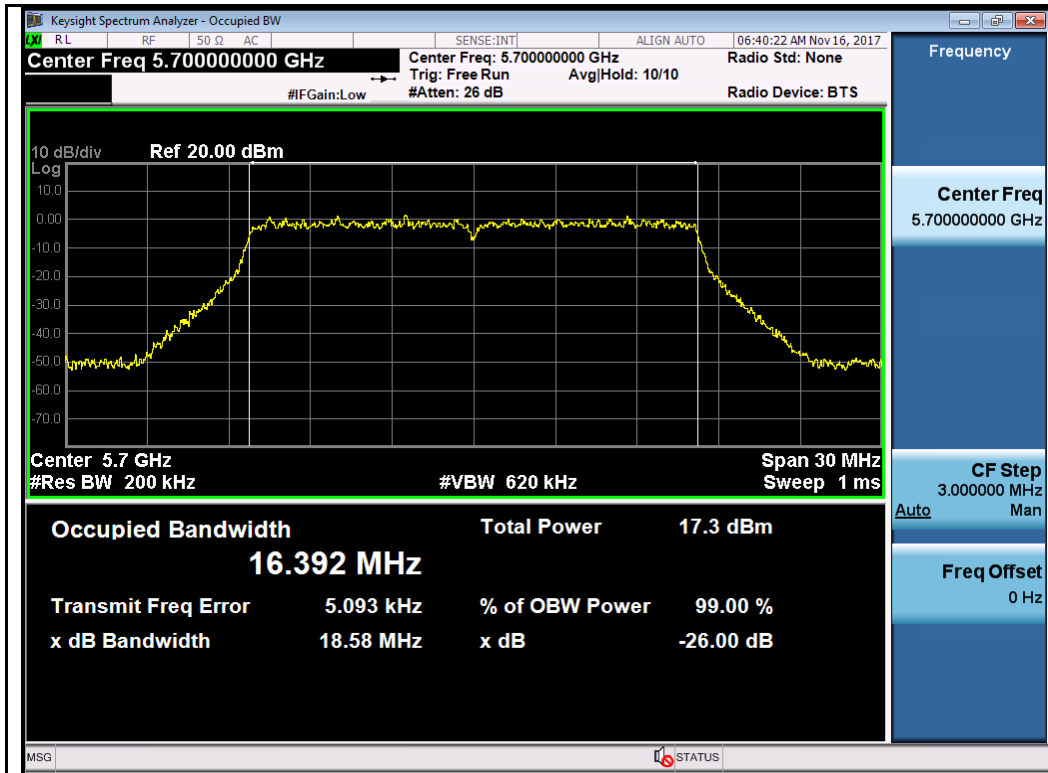


802.11a-5700MHz

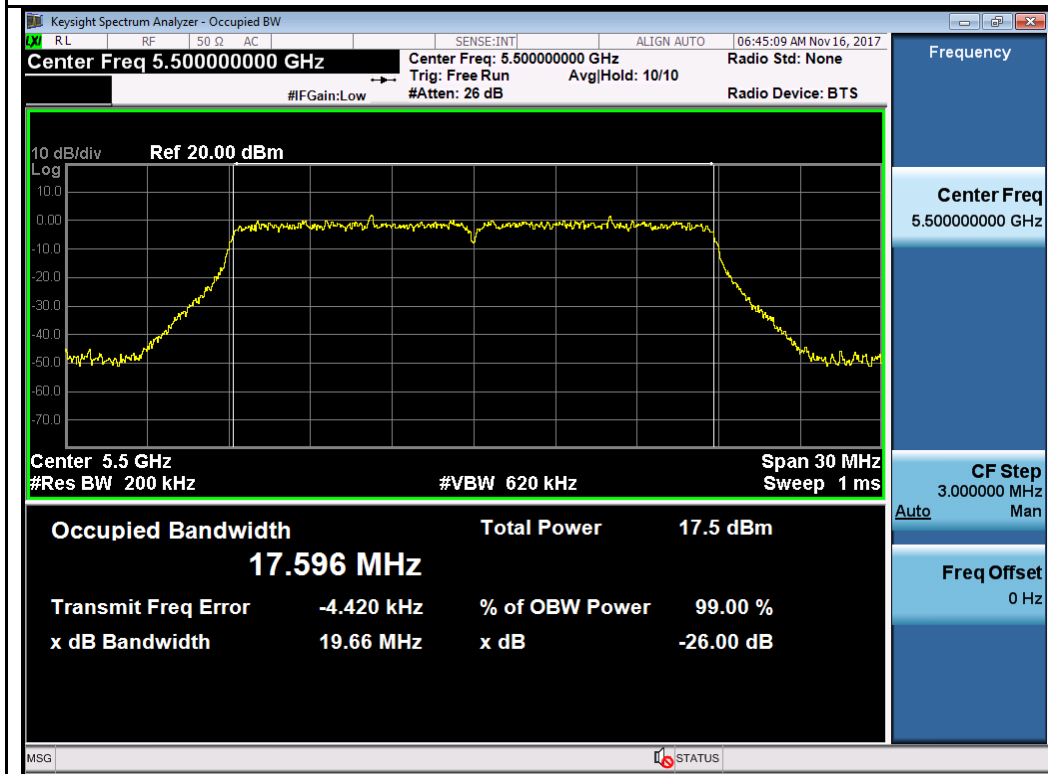


802.11n-HT20-5500MHz

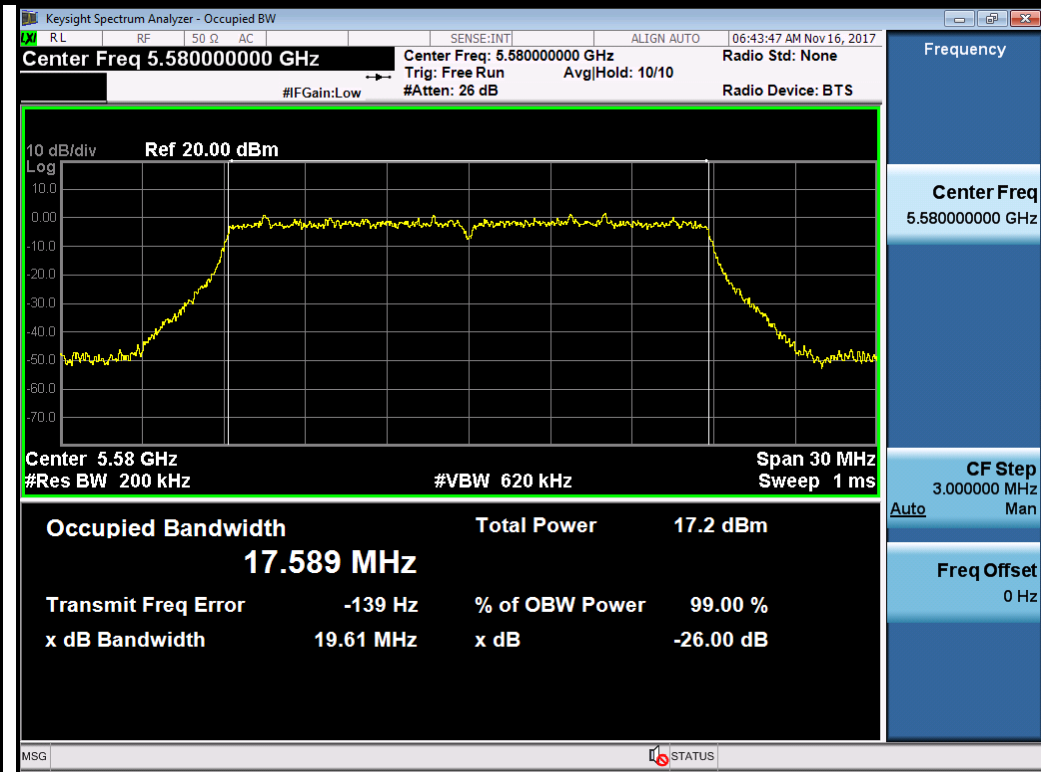


802.11n-HT20-5580MHz

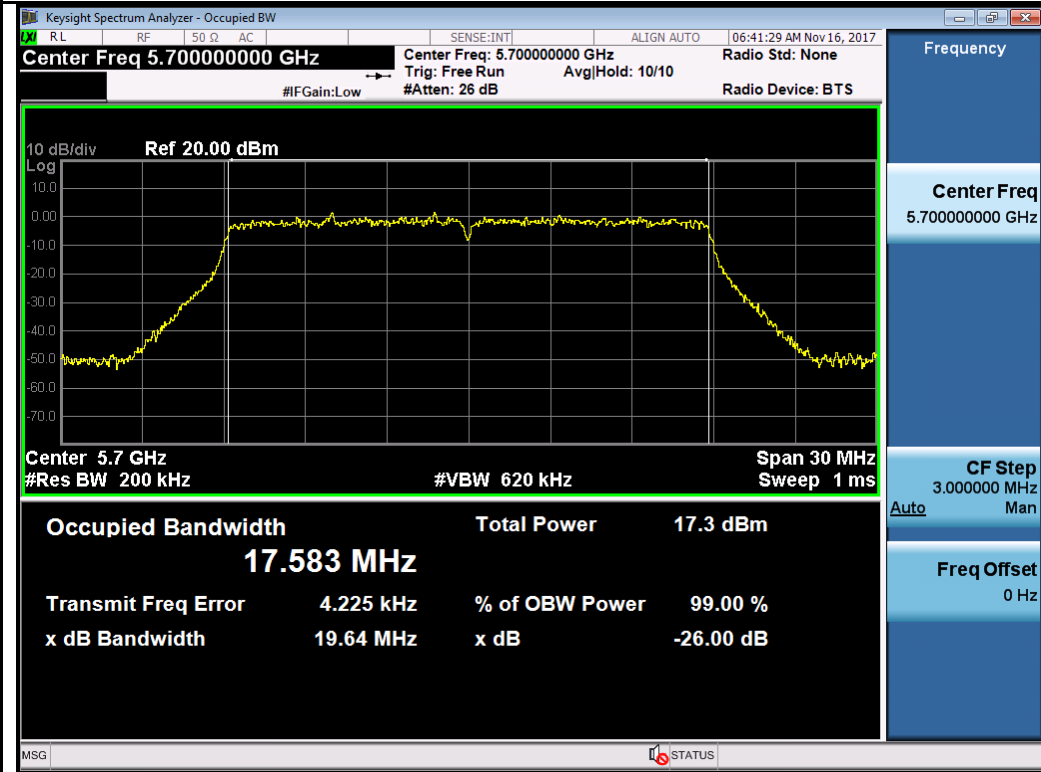


802.11n-HT20-5700MHz

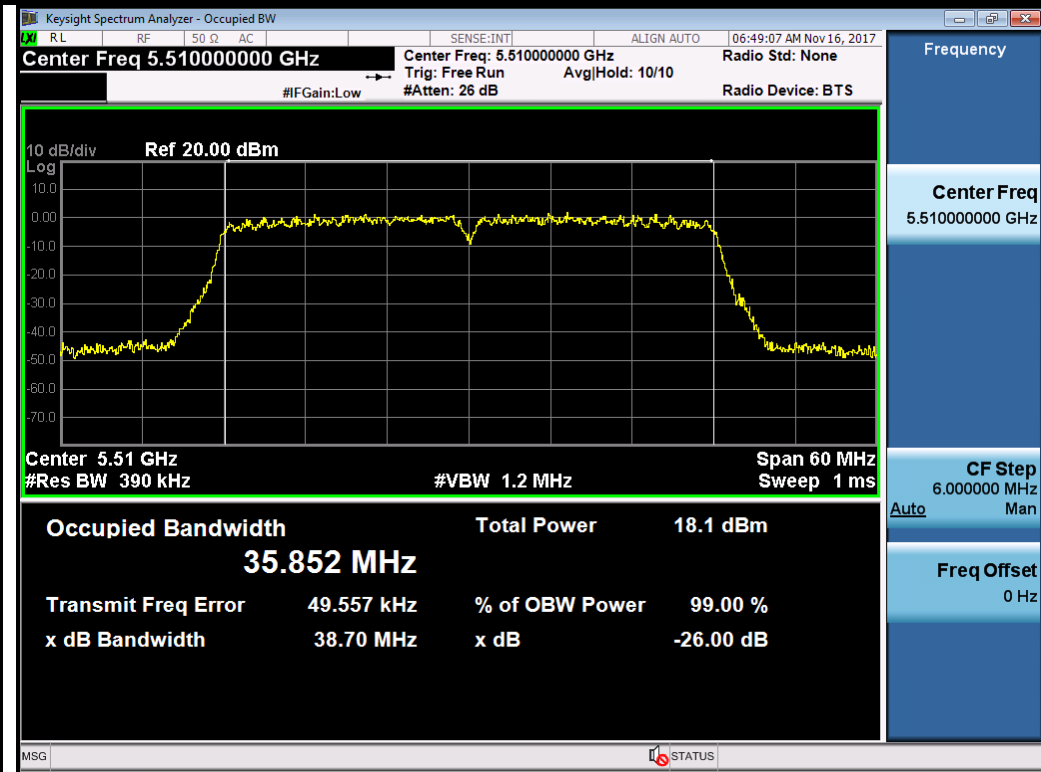


802.11n-HT40-5510MHz

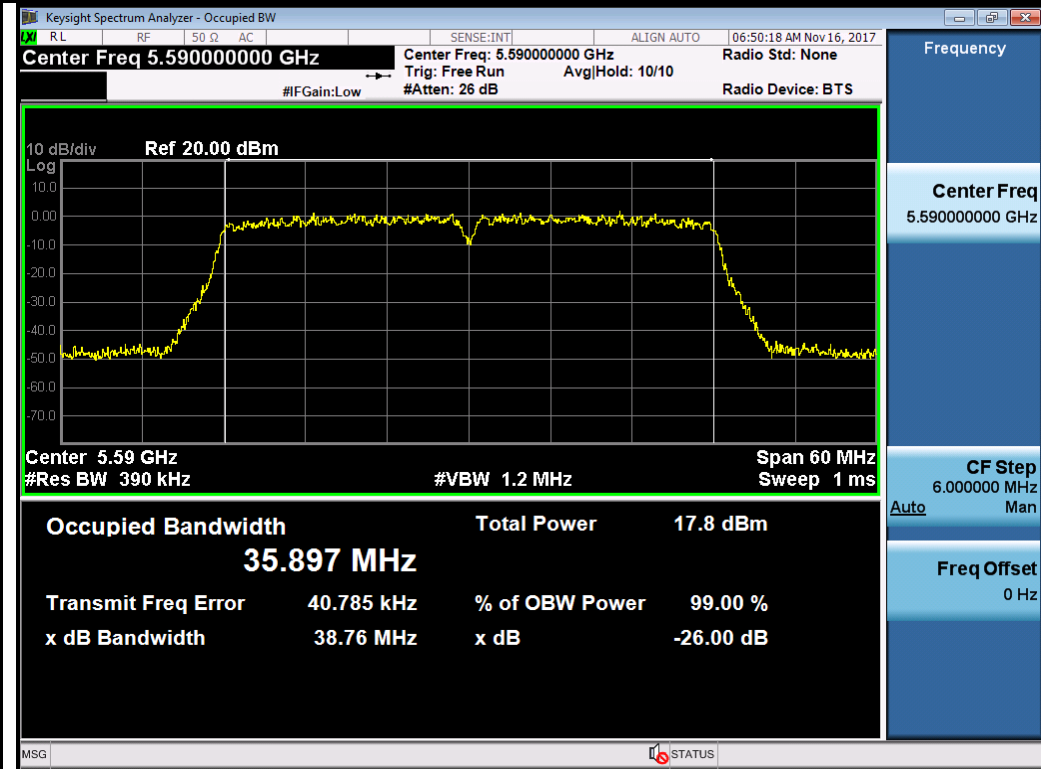

802.11n-HT40-5550MHz

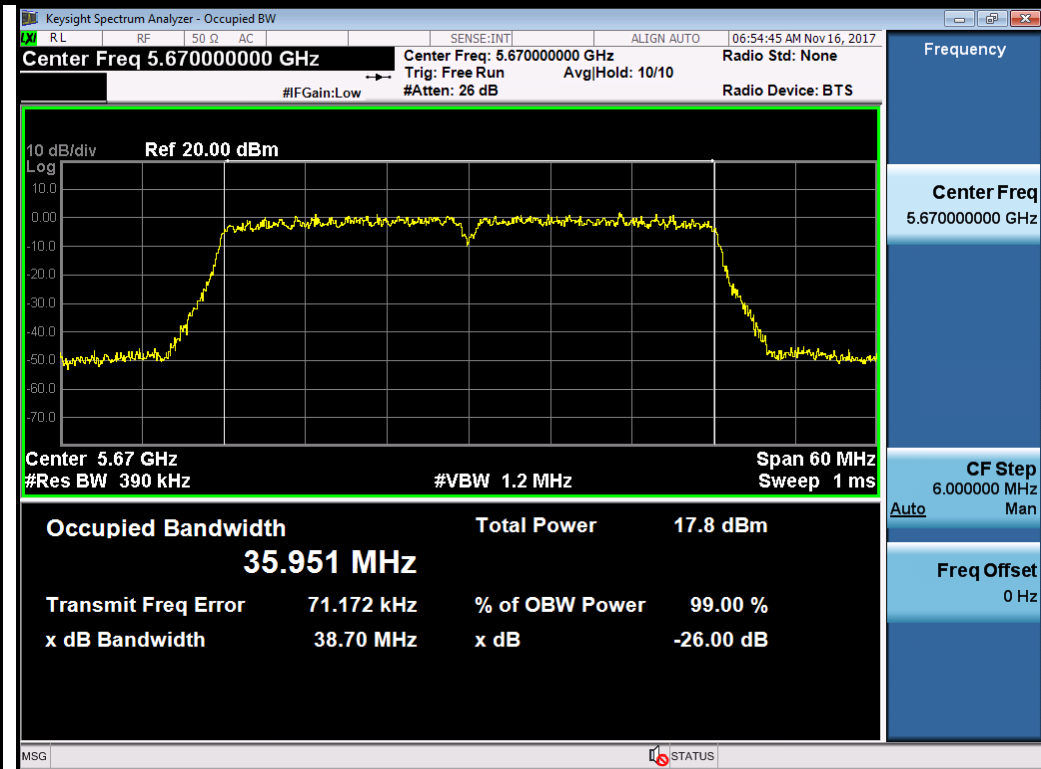


802.11n-HT40-5670MHz

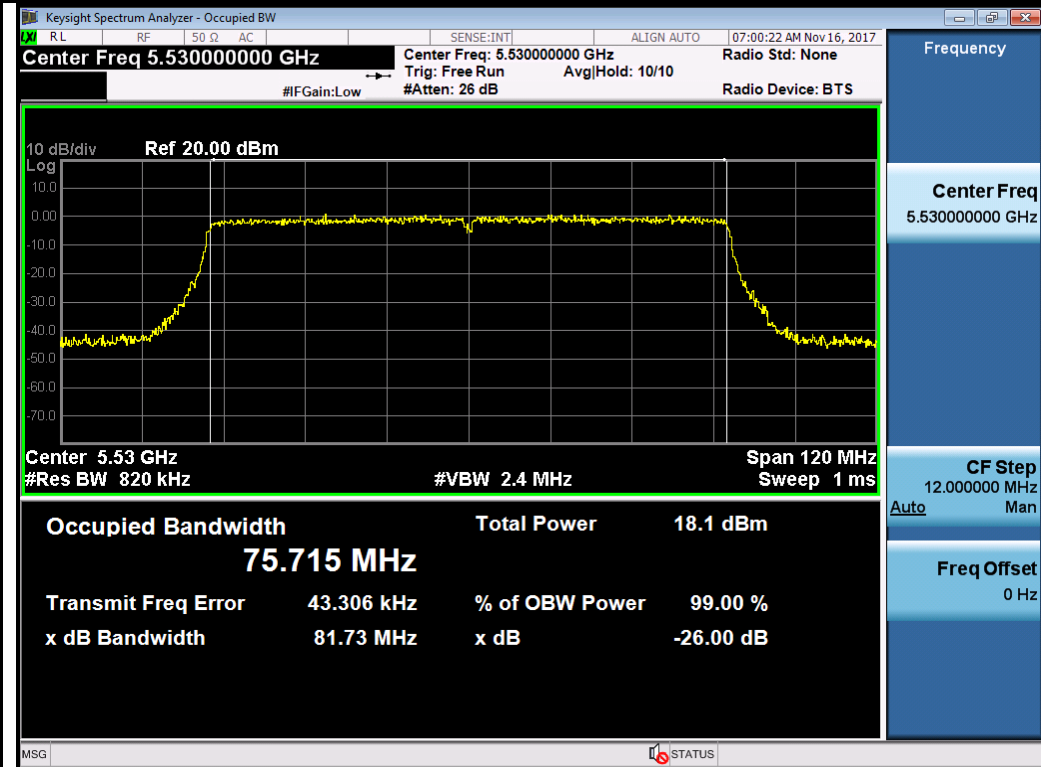


802.11ac-VHT80-5530MHz




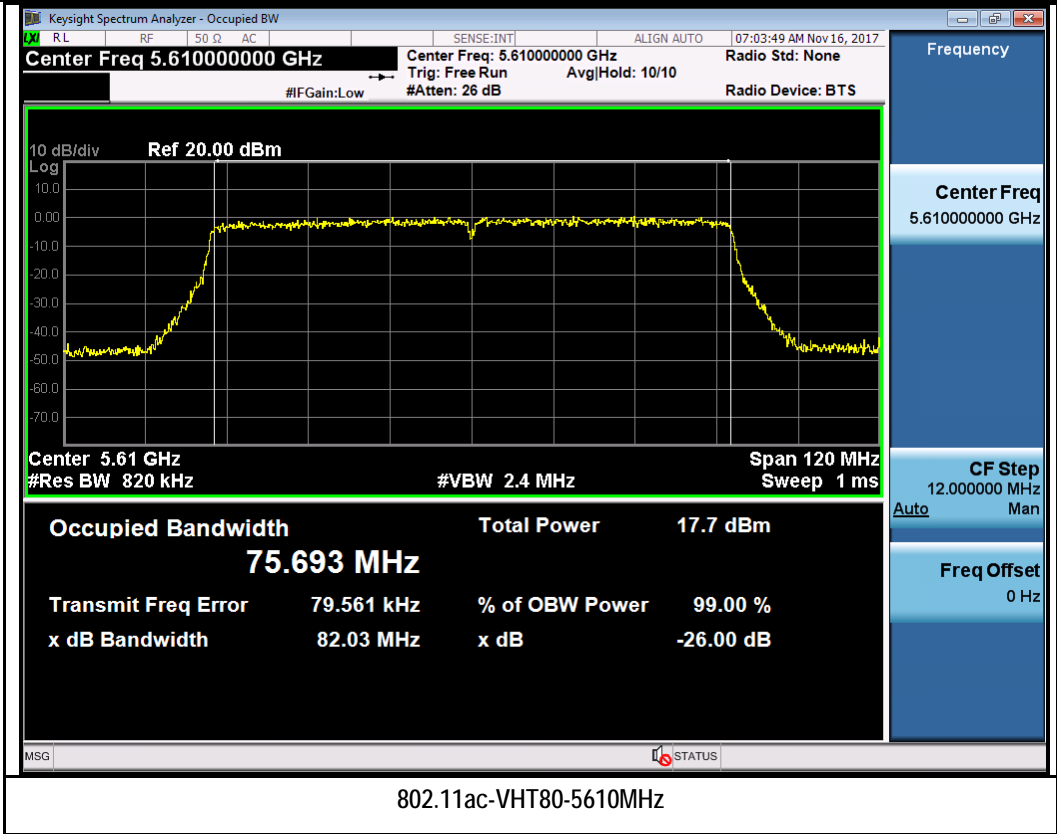


26dB BW Cross Band:

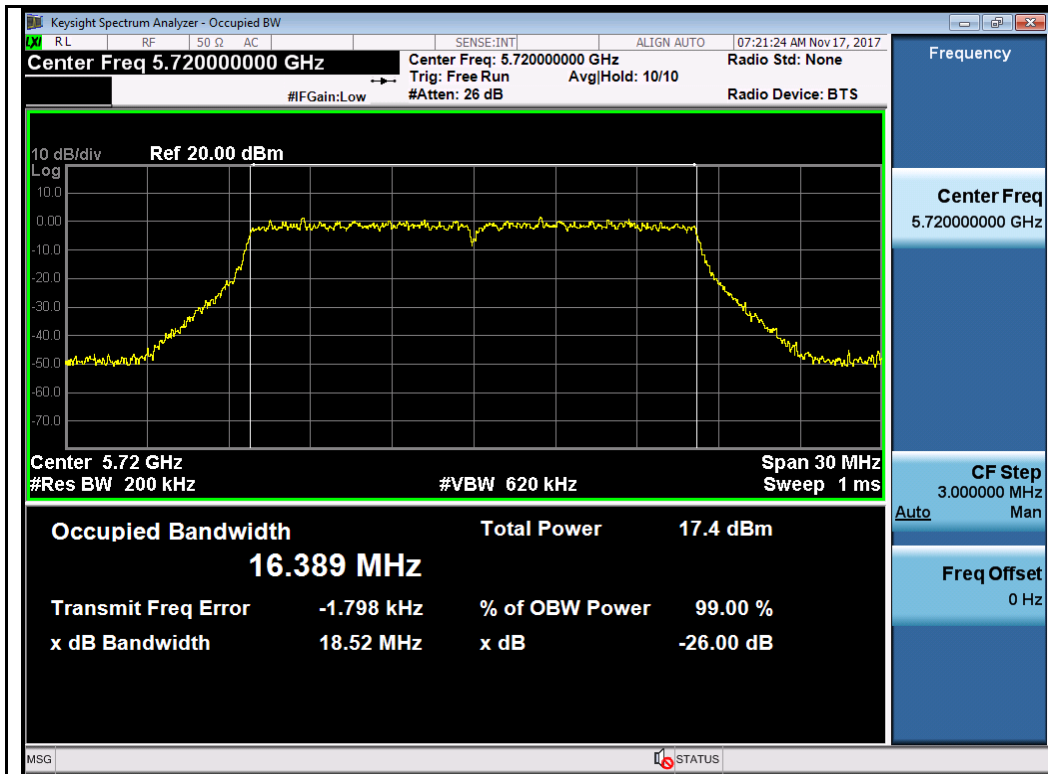


802.11a-5720MHz

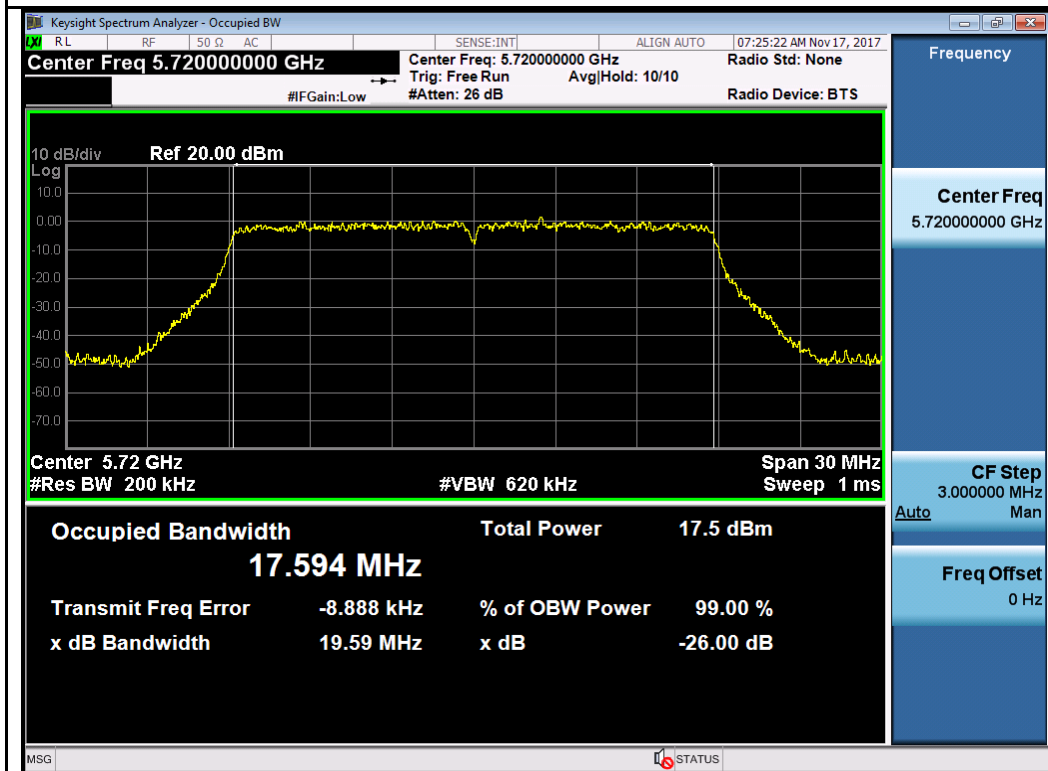

802.11n-HT20 5720MHz

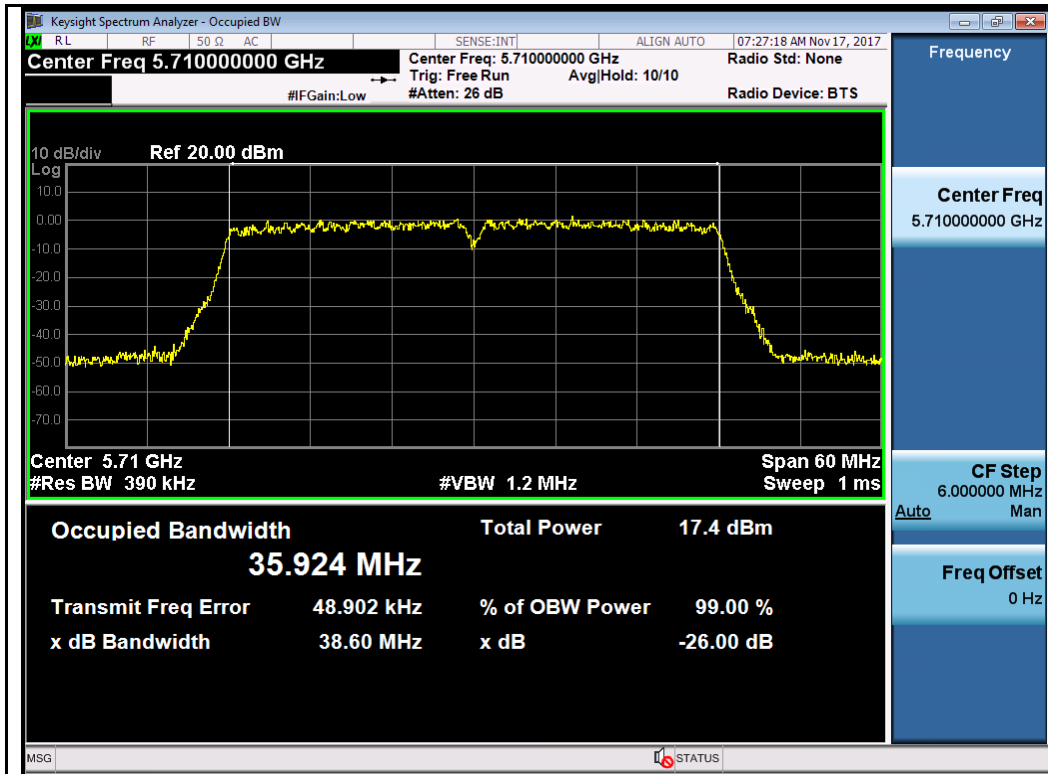


802.11n-HT40 5710MHz

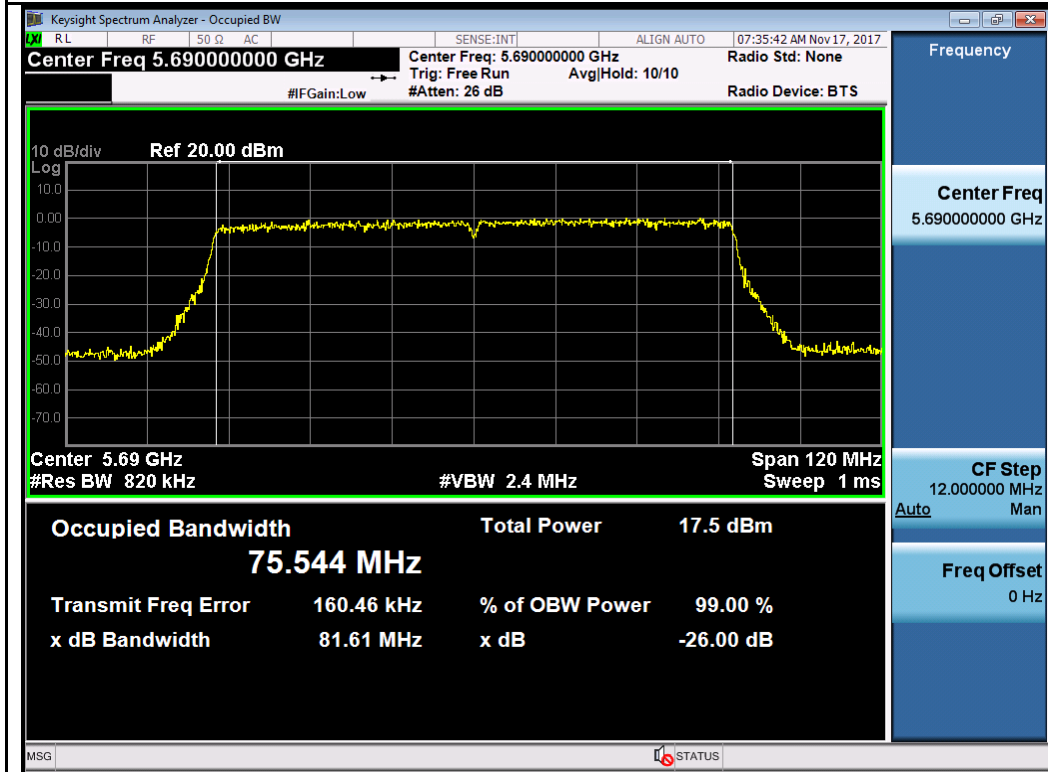


802.11n-HT20-5690MHz


6dB BW Cross Band:

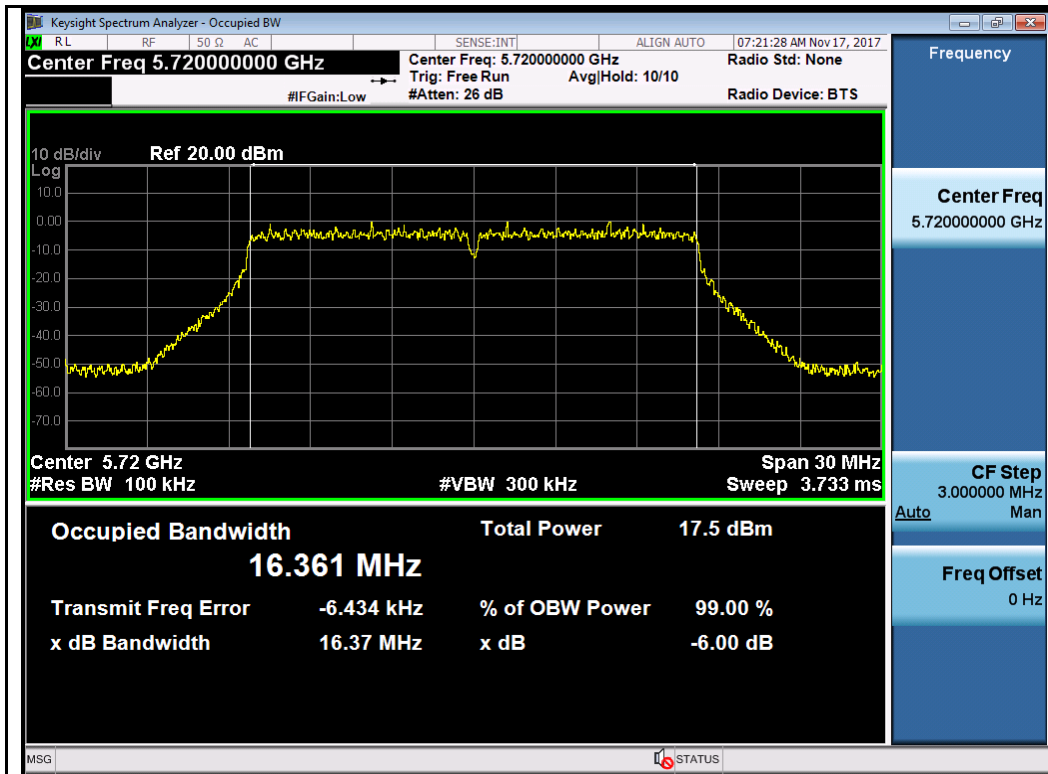


802.11a-5720MHz

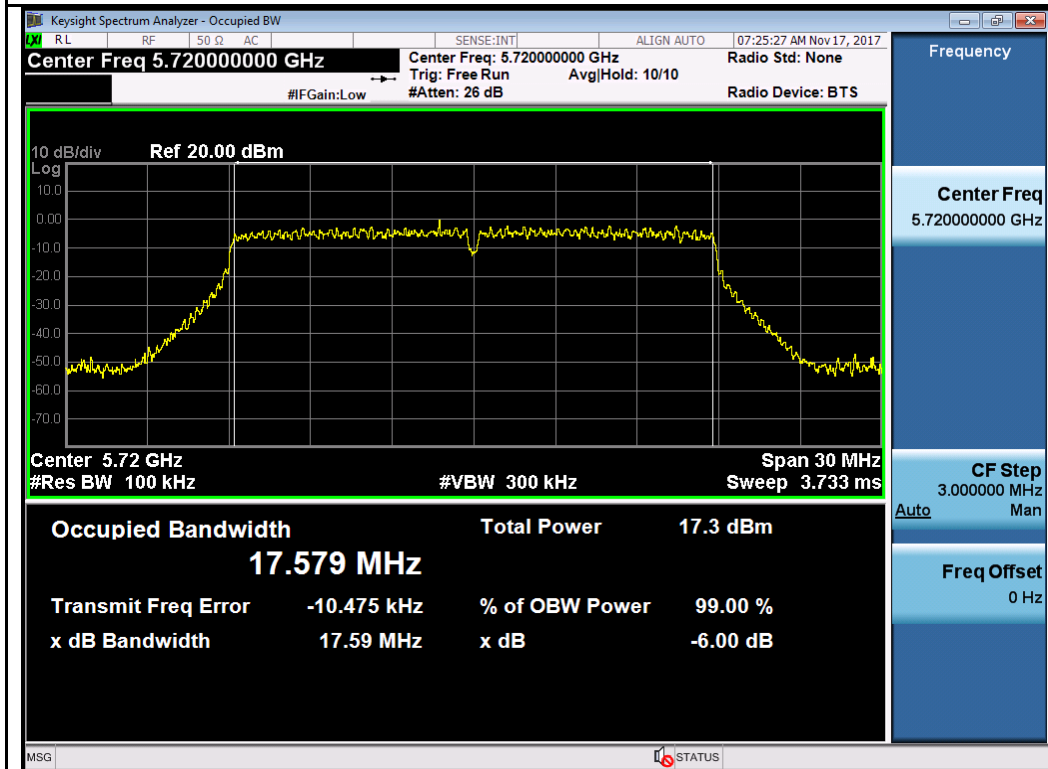

802.11n-HT20 5720MHz

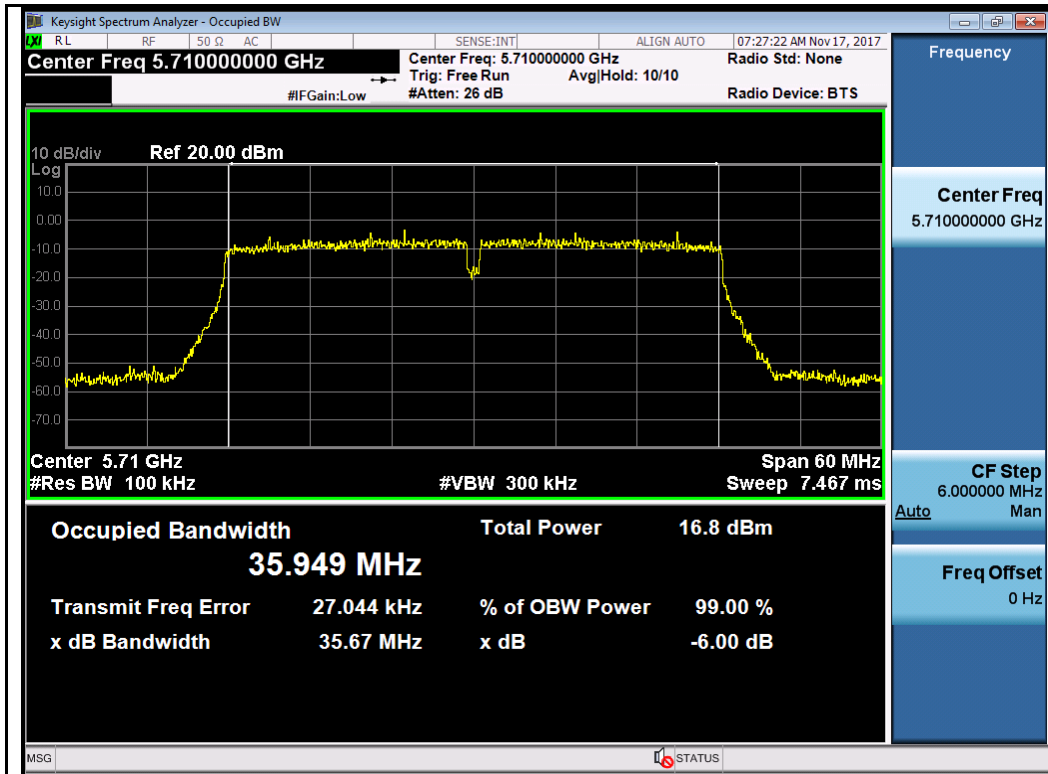


802.11n-HT40 5710MHz

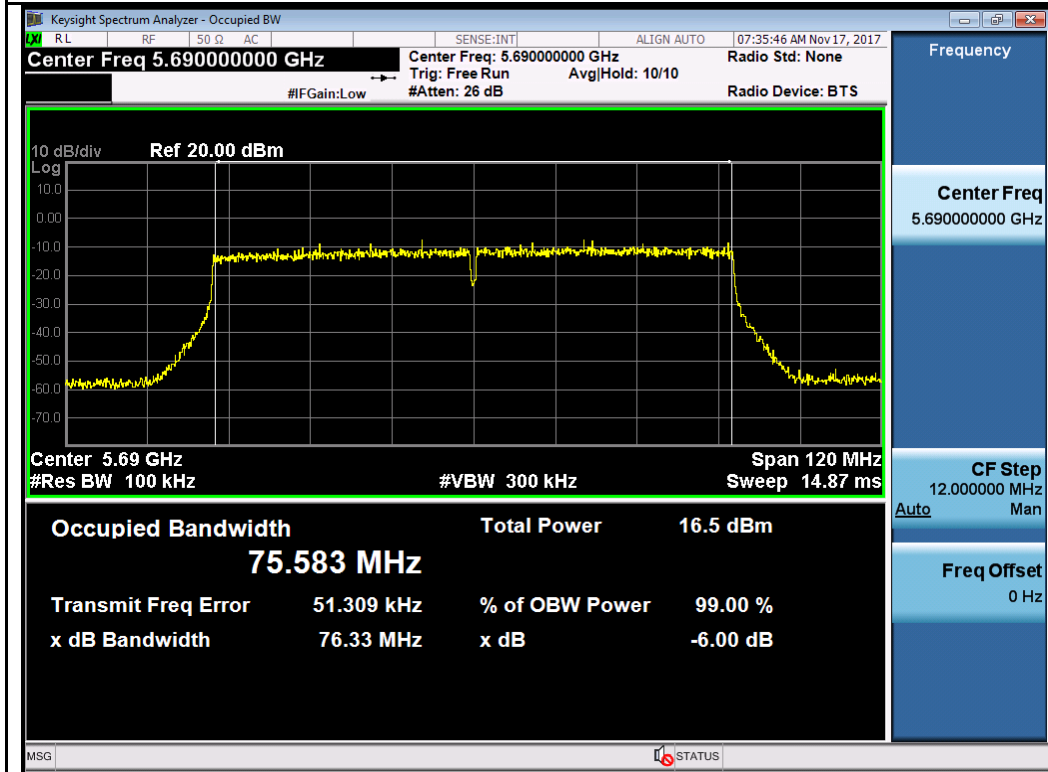

802.11ac-VHT80-5690MHz


T310S  
26dB Bandwidth Test Plots  
W53:

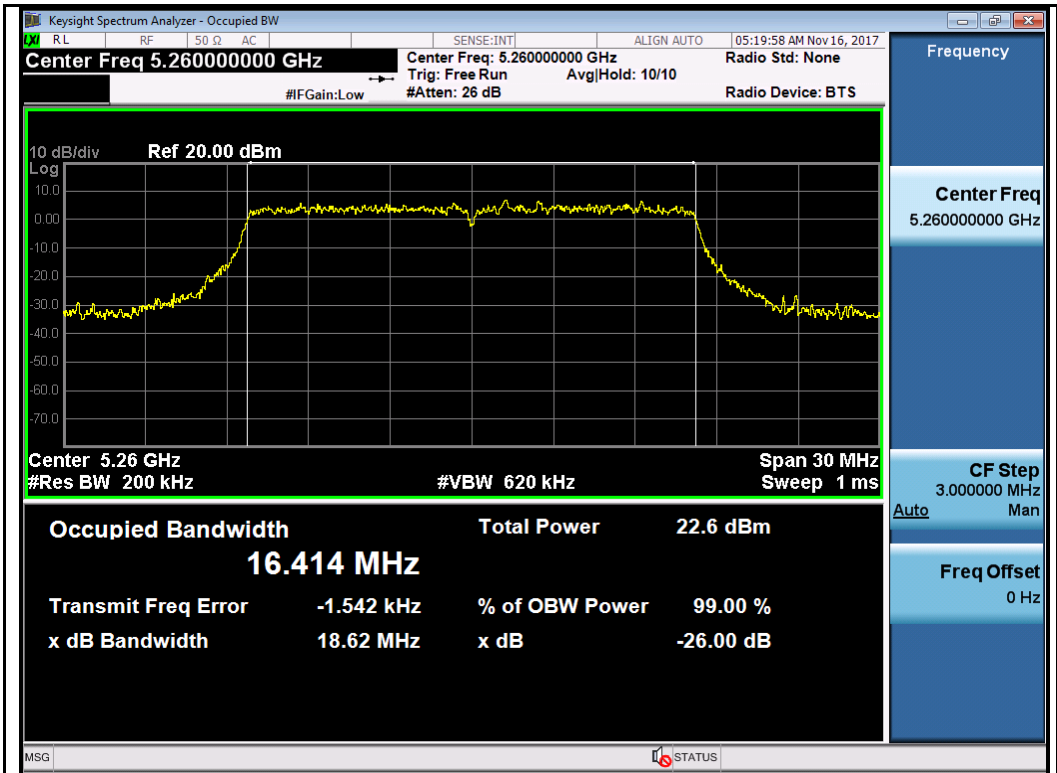


802.11a-5260MHz




802.11a-5280MHz

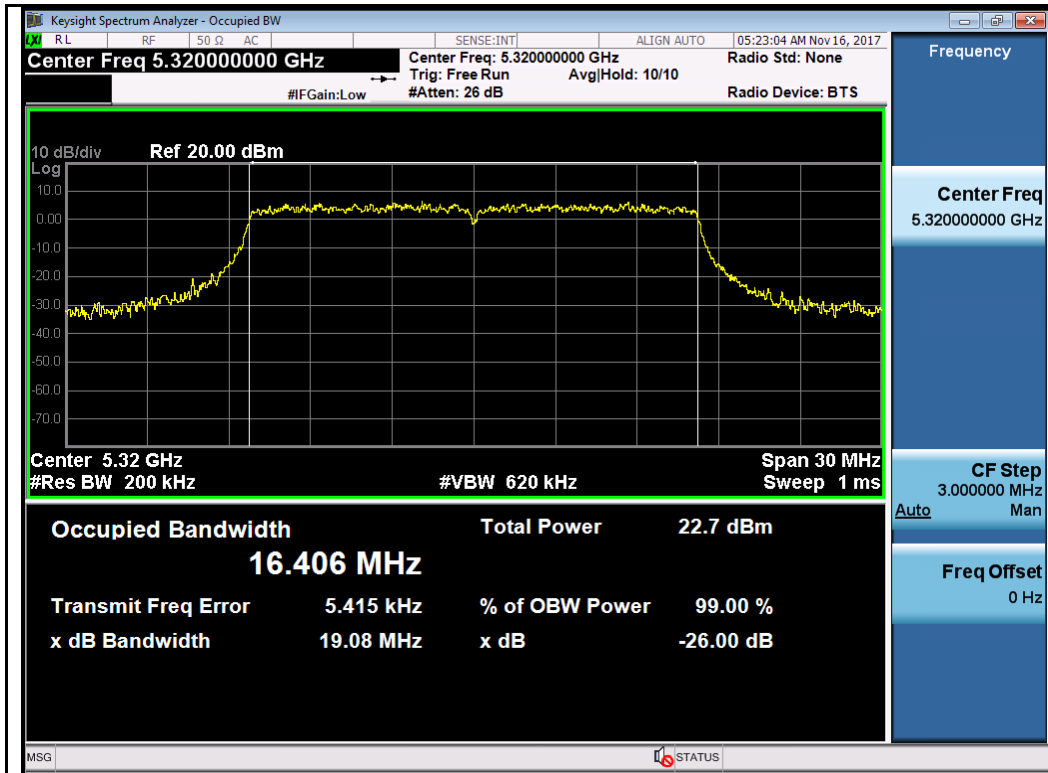


802.11a-5320MHz

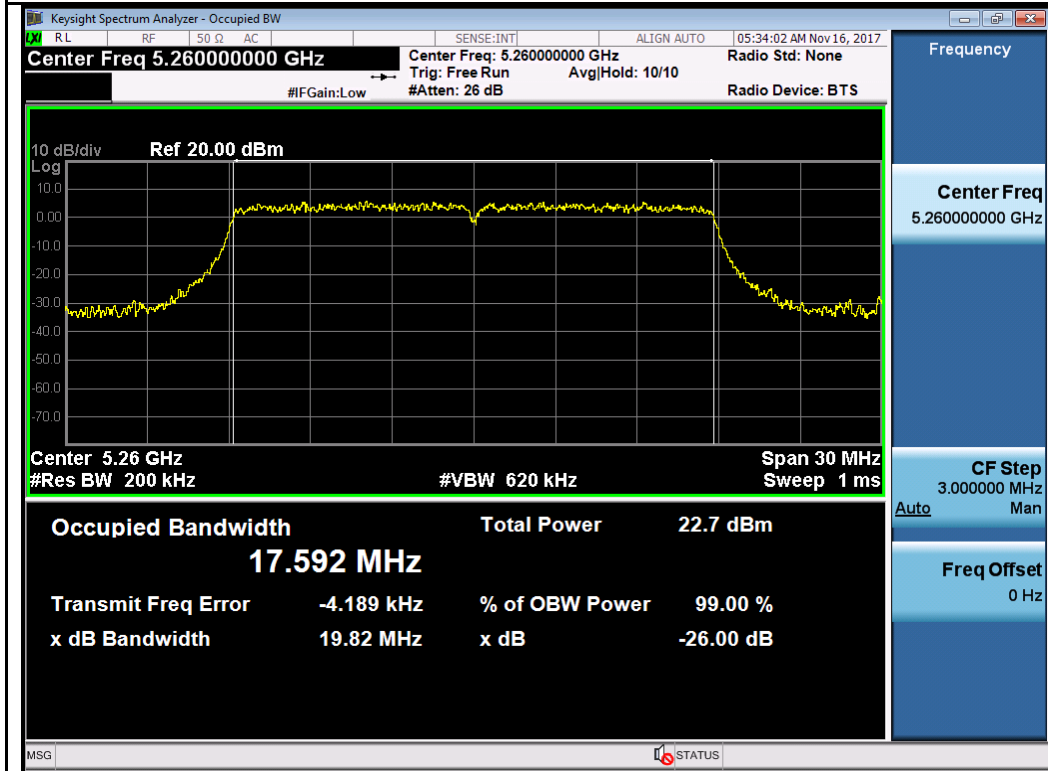

802.11n-HT20-5260MHz

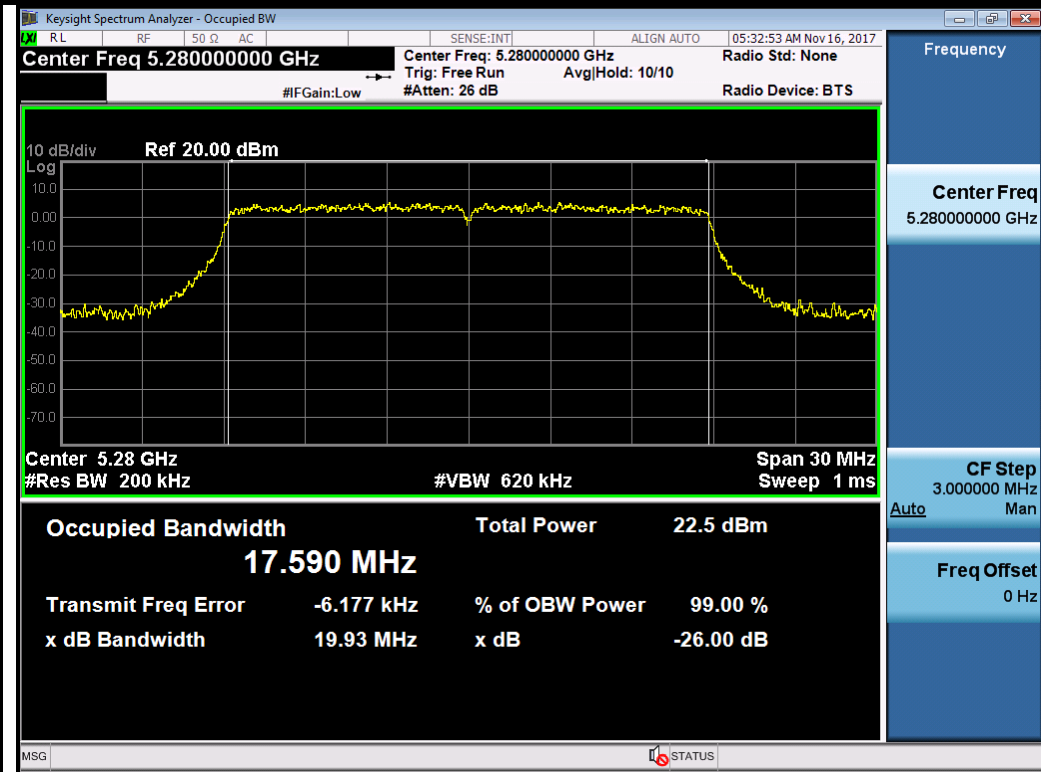


802.11n-HT20-5280MHz

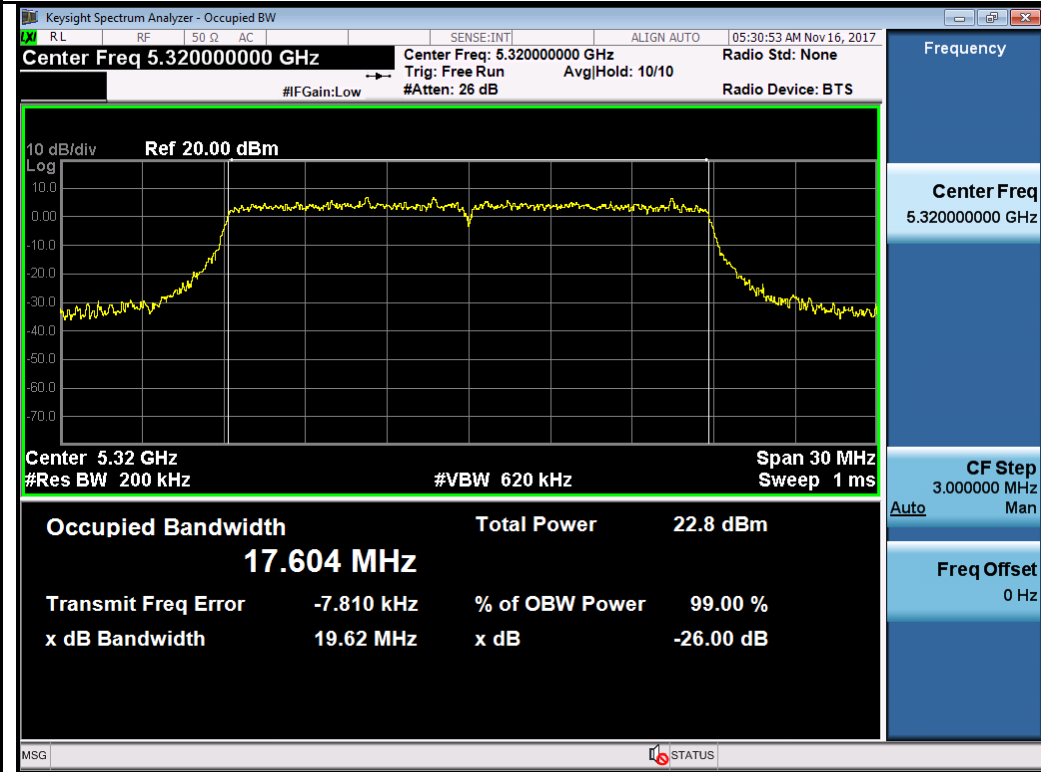


802.11n-HT20-5320MHz




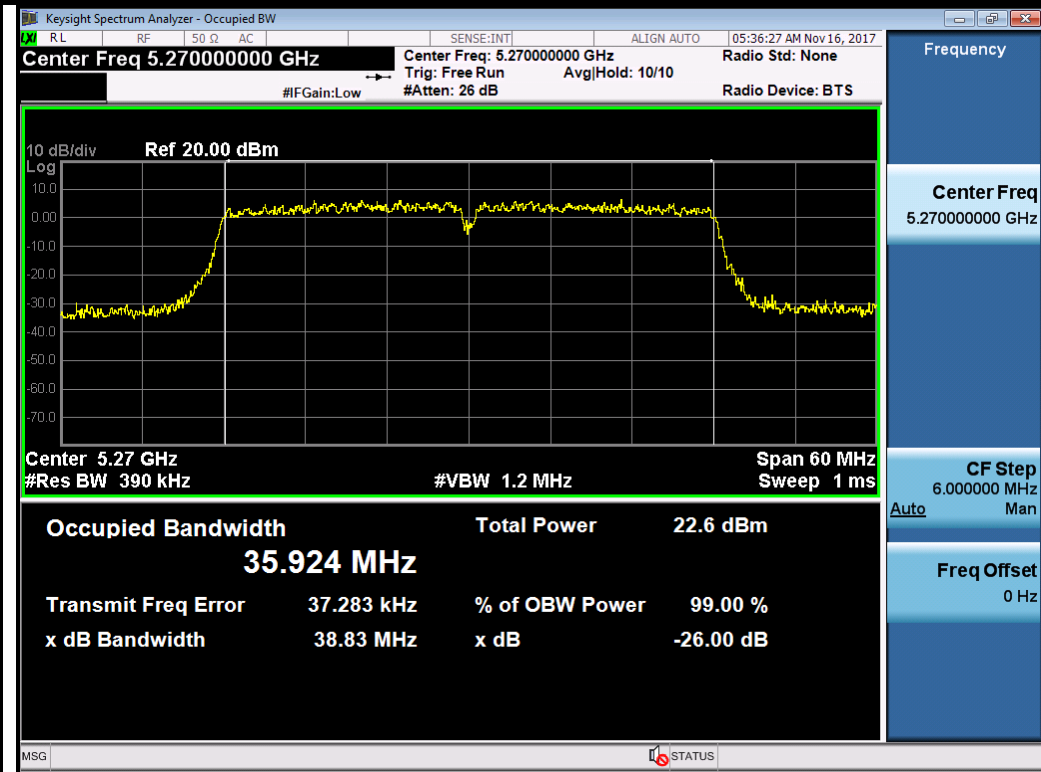


802.11n-HT40-5270MHz

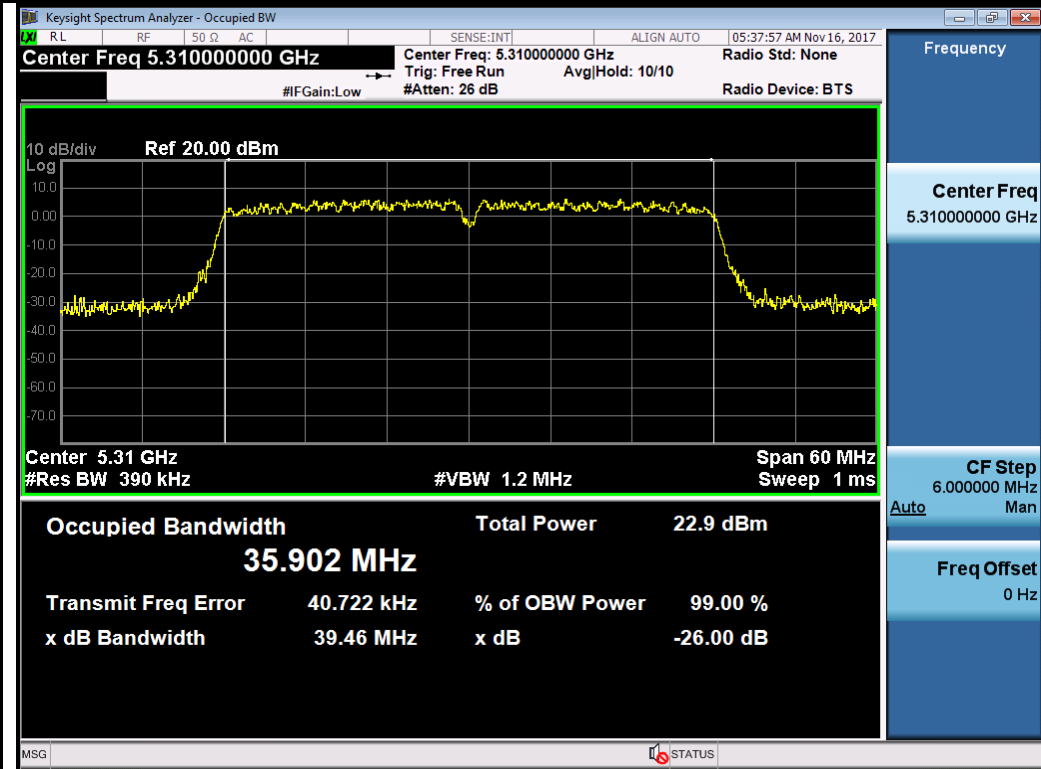


802.11n-HT40-5310MHz

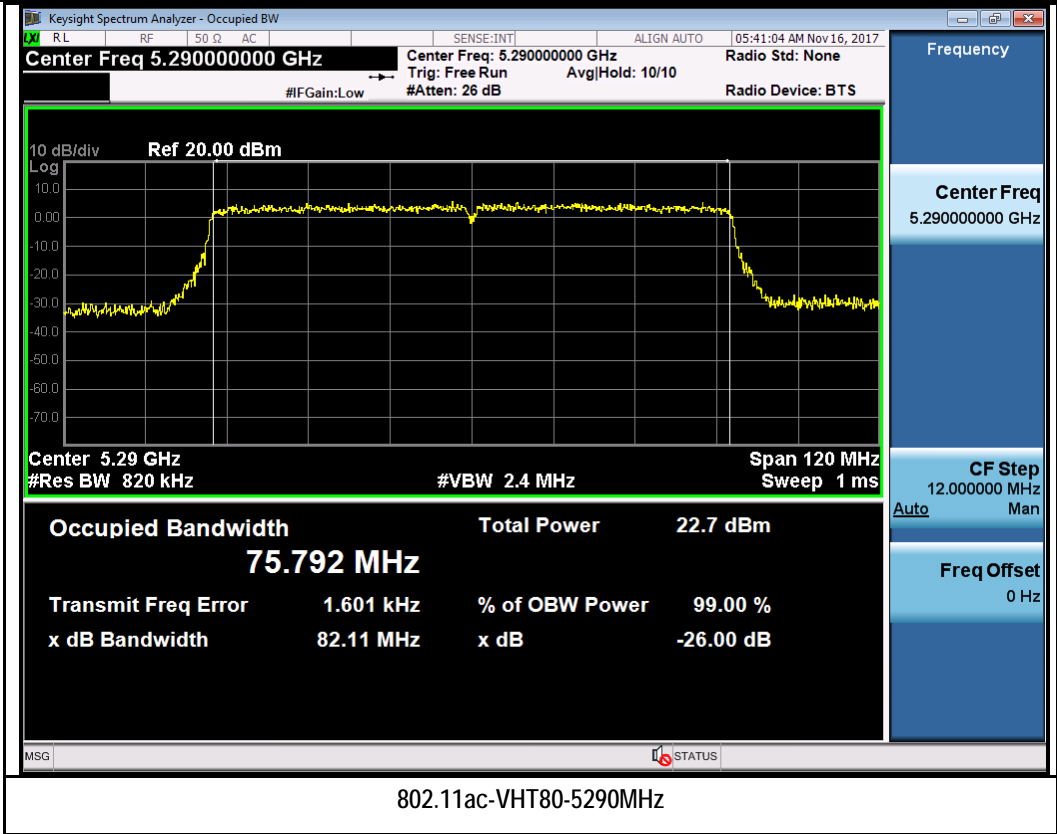

W56:

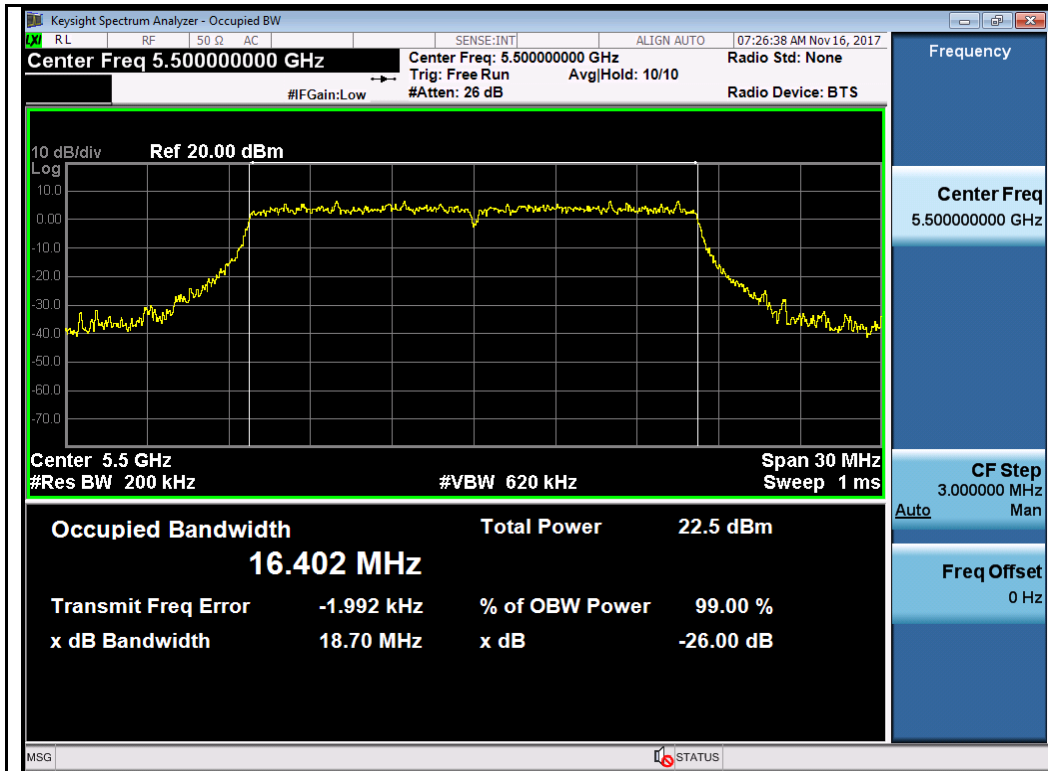

802.11a-5500MHz

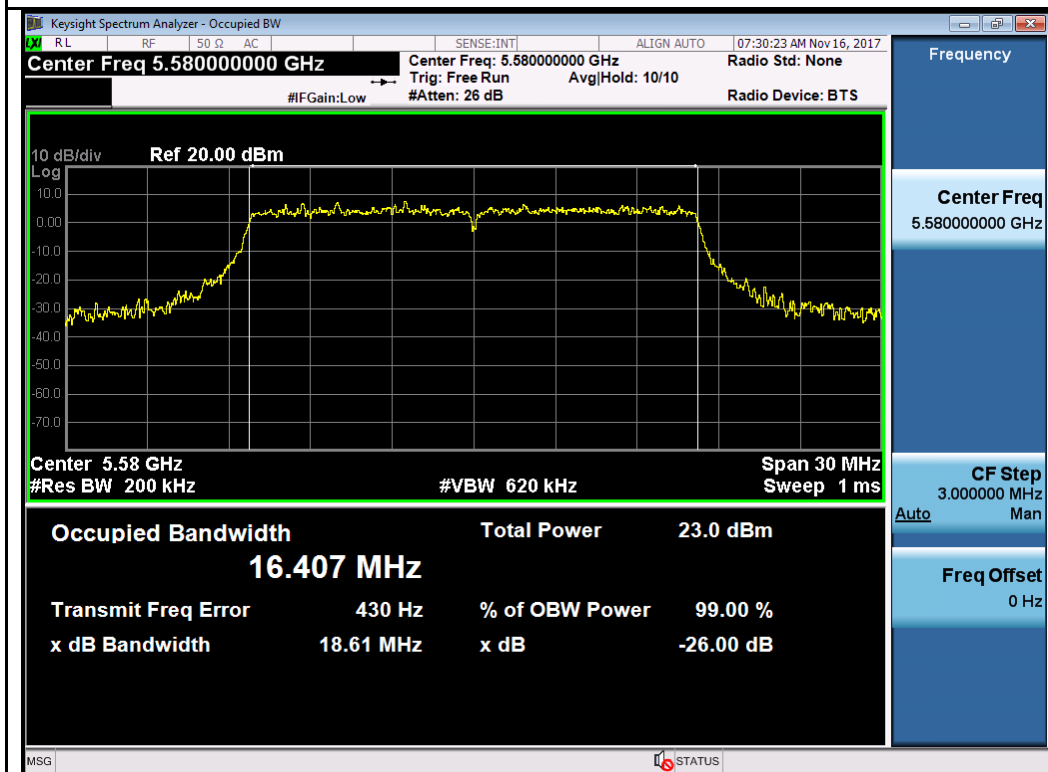

802.11a-5580MHz