

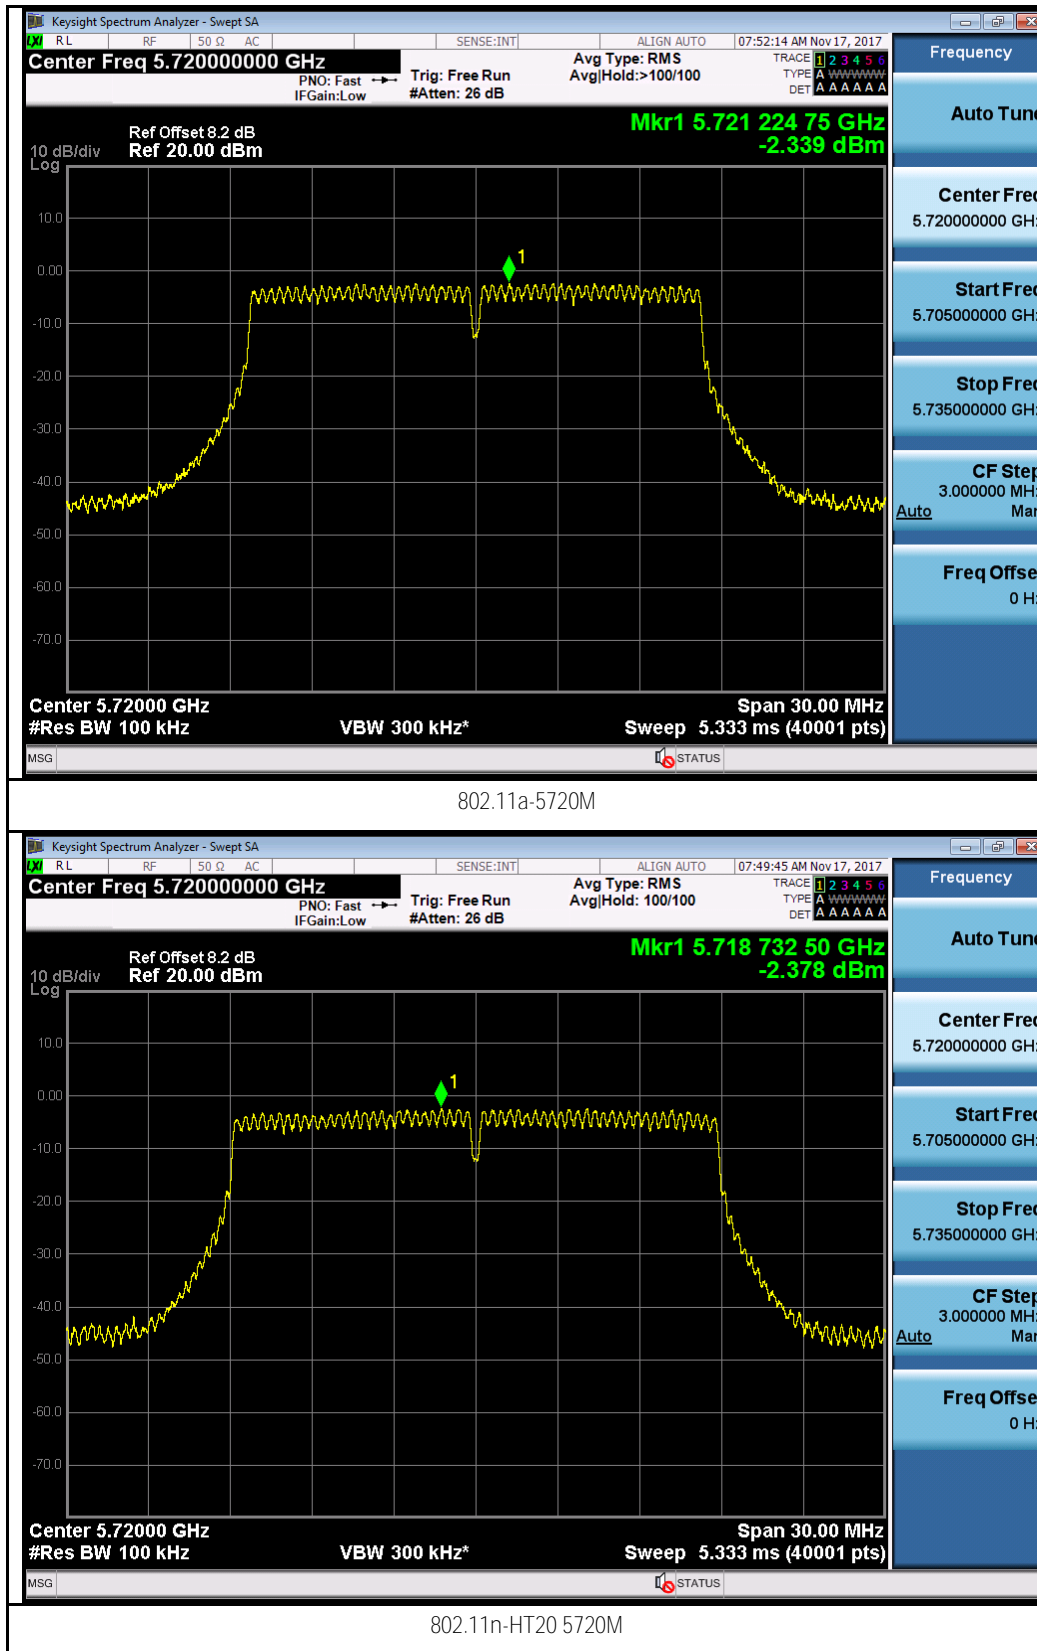


Chain 1:

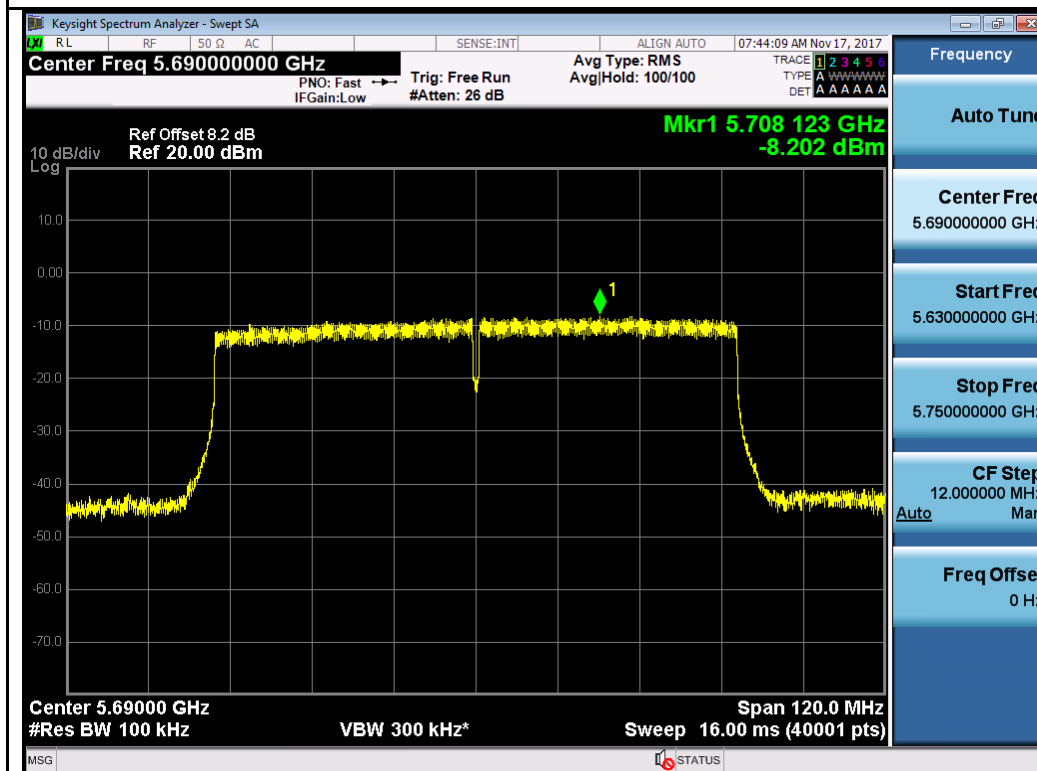


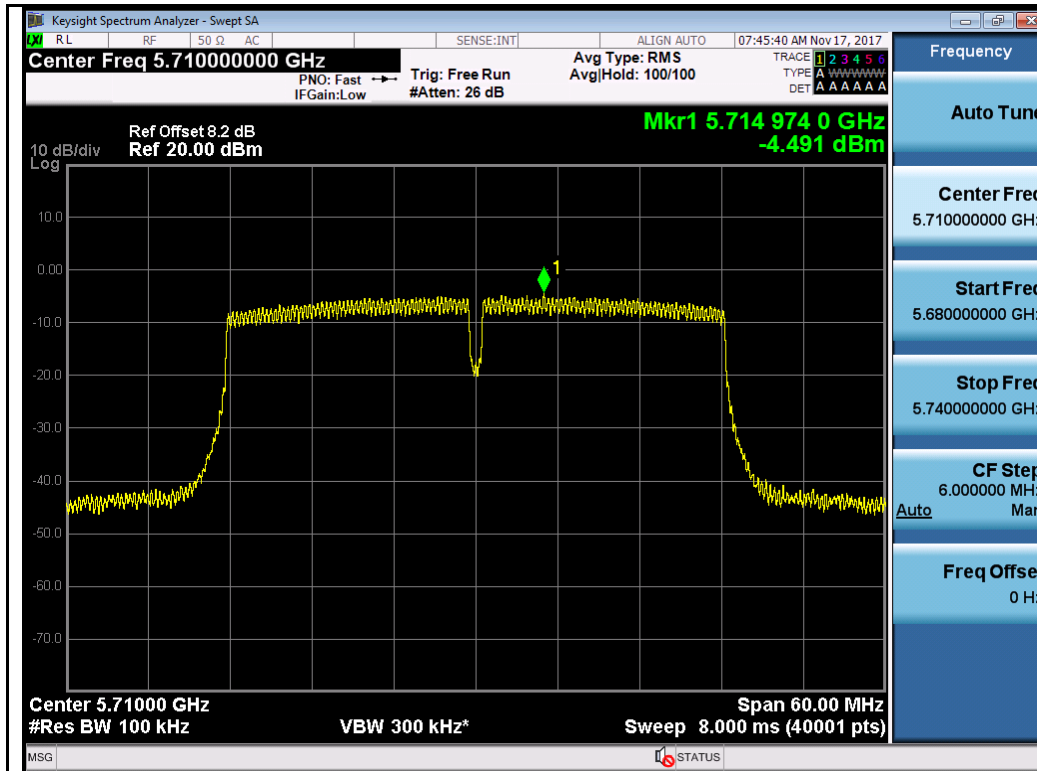


T310S Beamforming Mode


Test Plot for W53:

Chain 0:


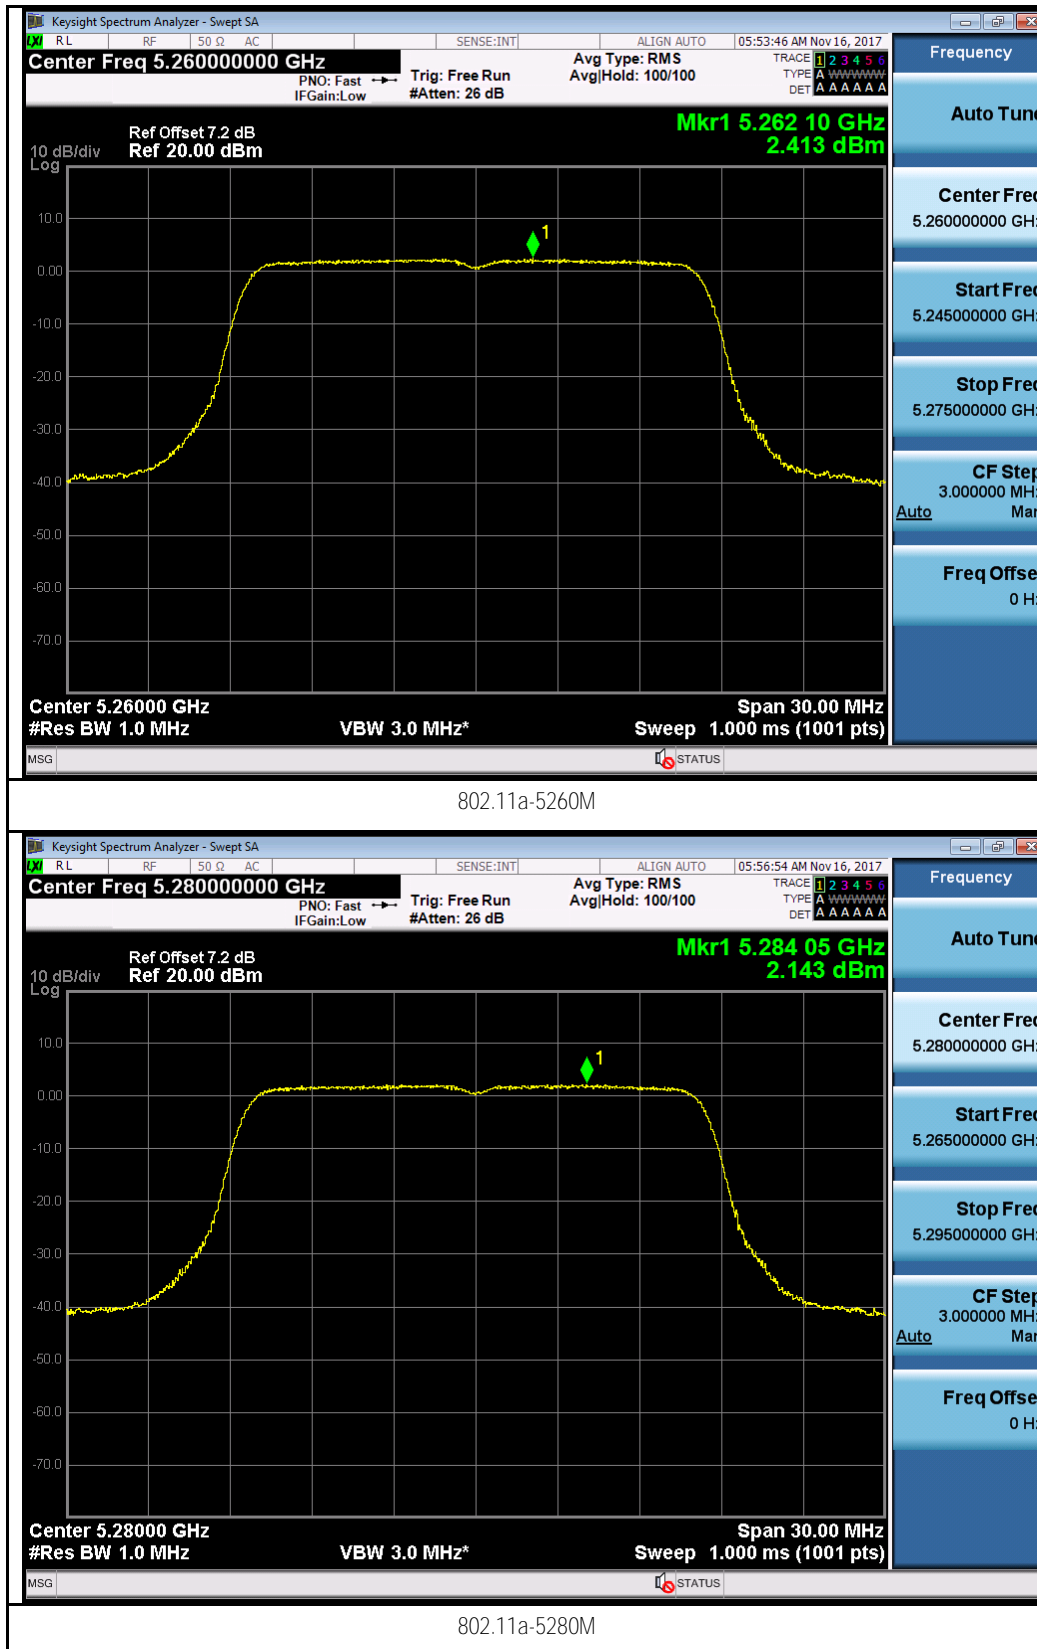


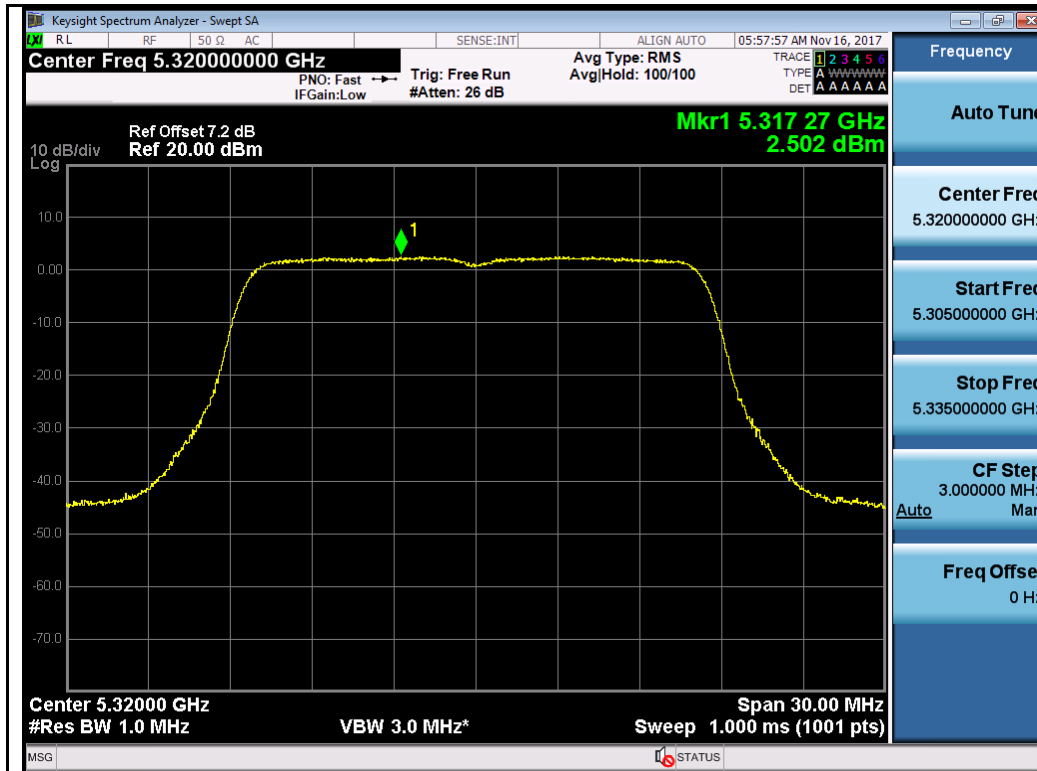


802.11a-5320M

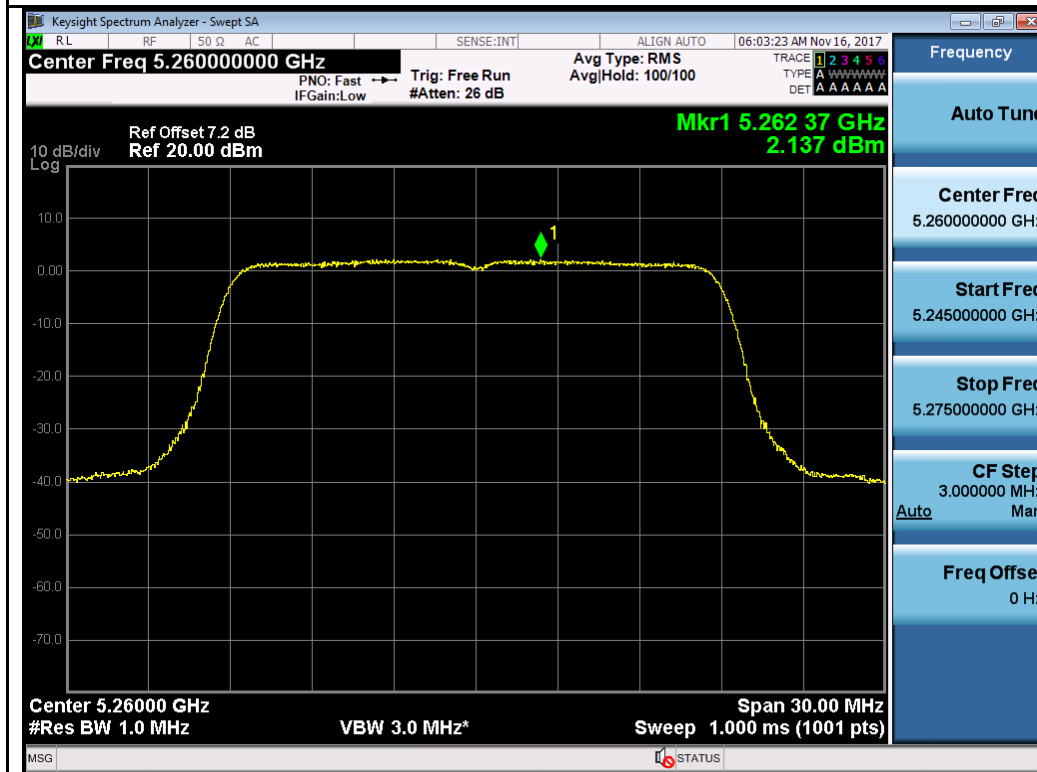


802.11n-HT20 5260M

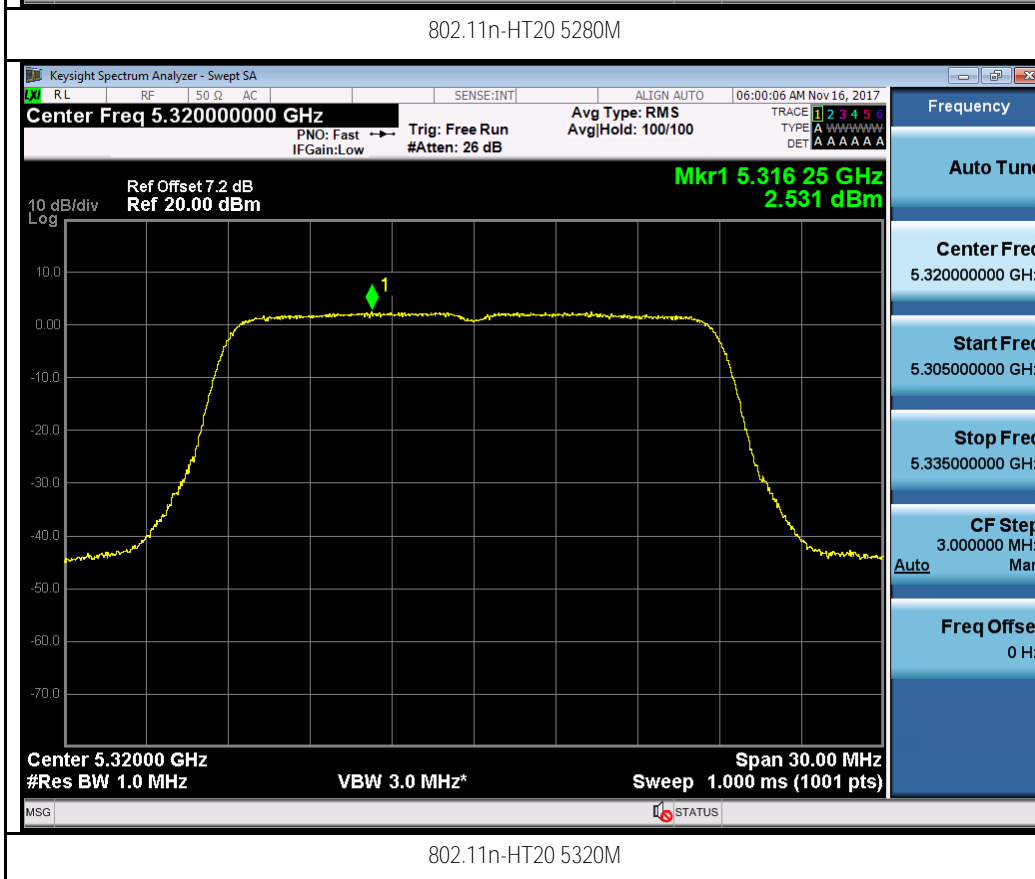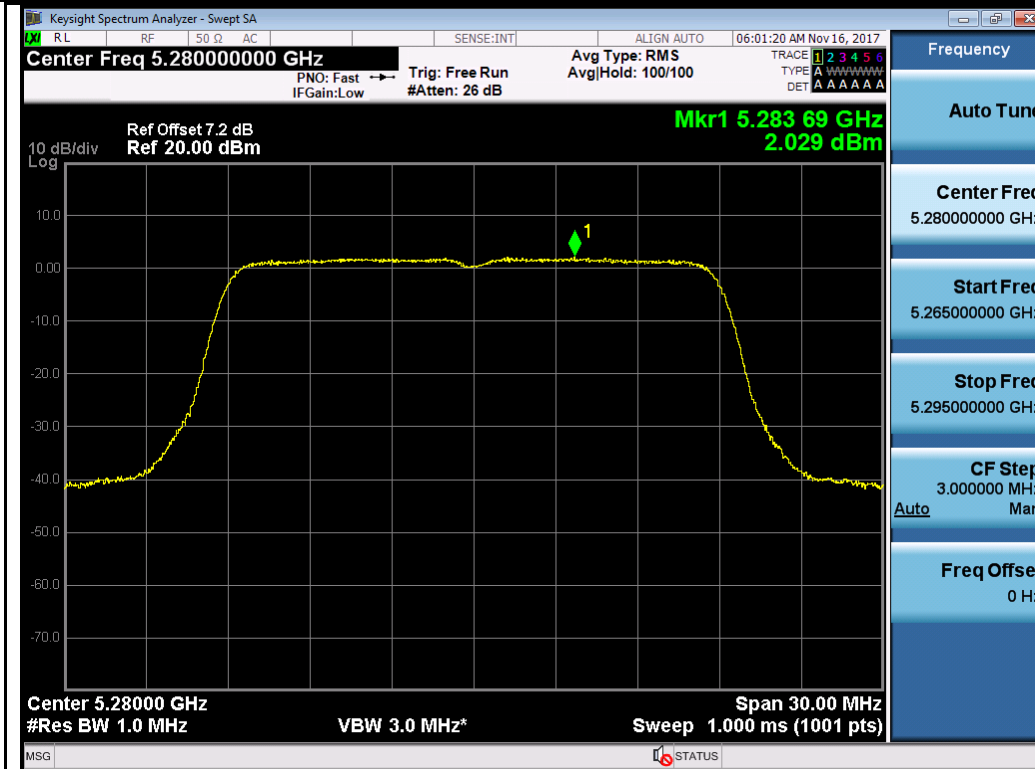


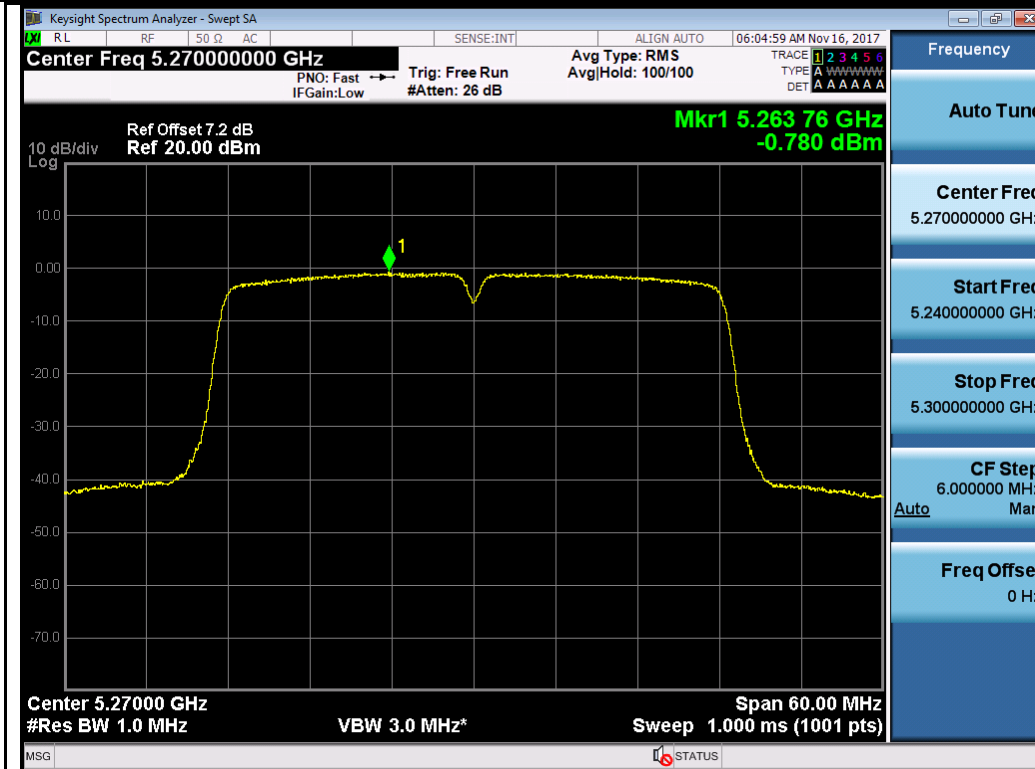


802.11n-HT40 5270M


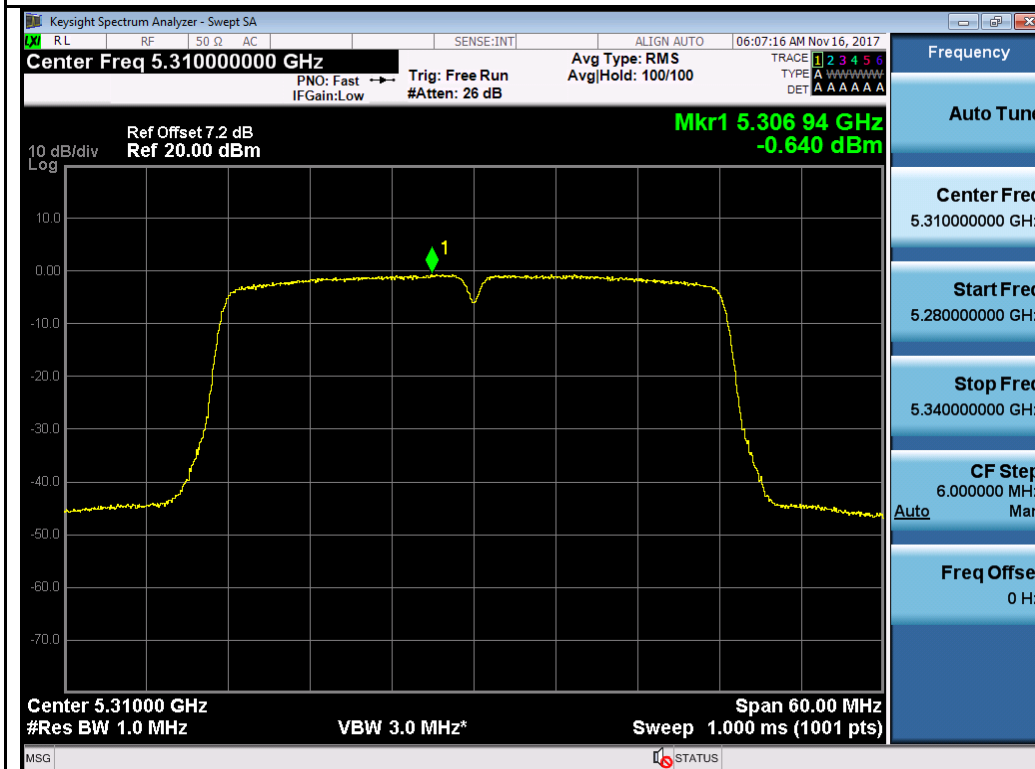




802.11n-HT40 5310M

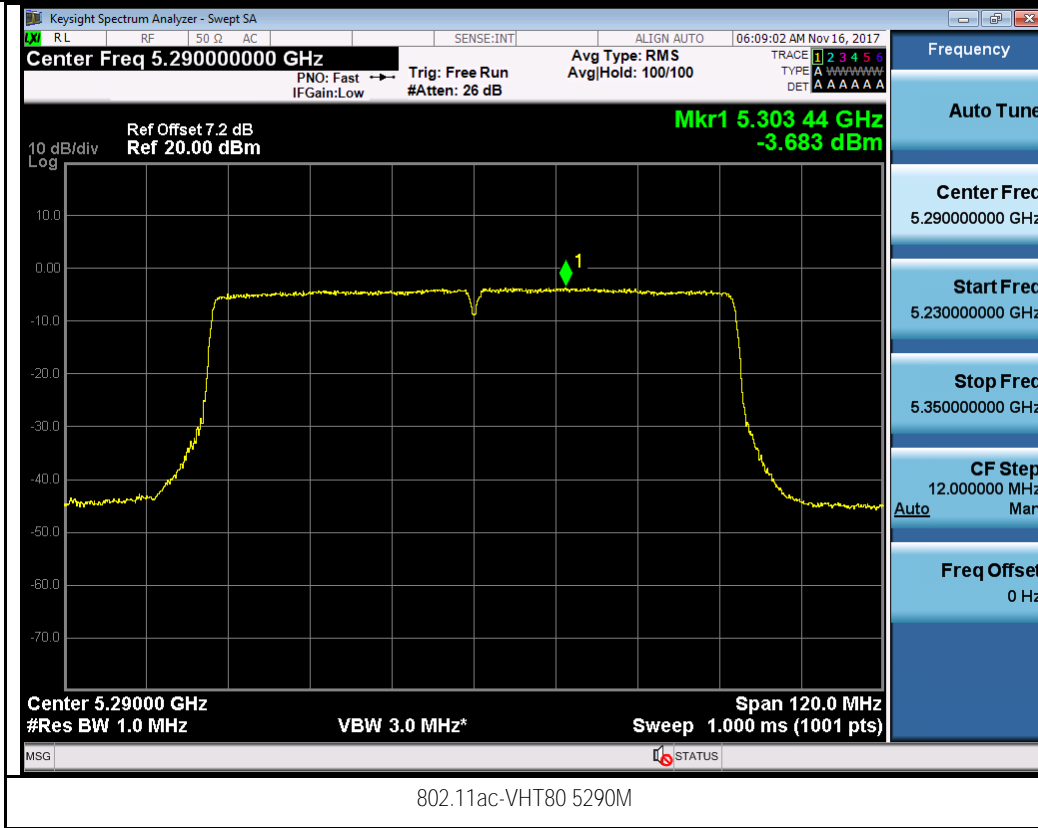


Chain 1:

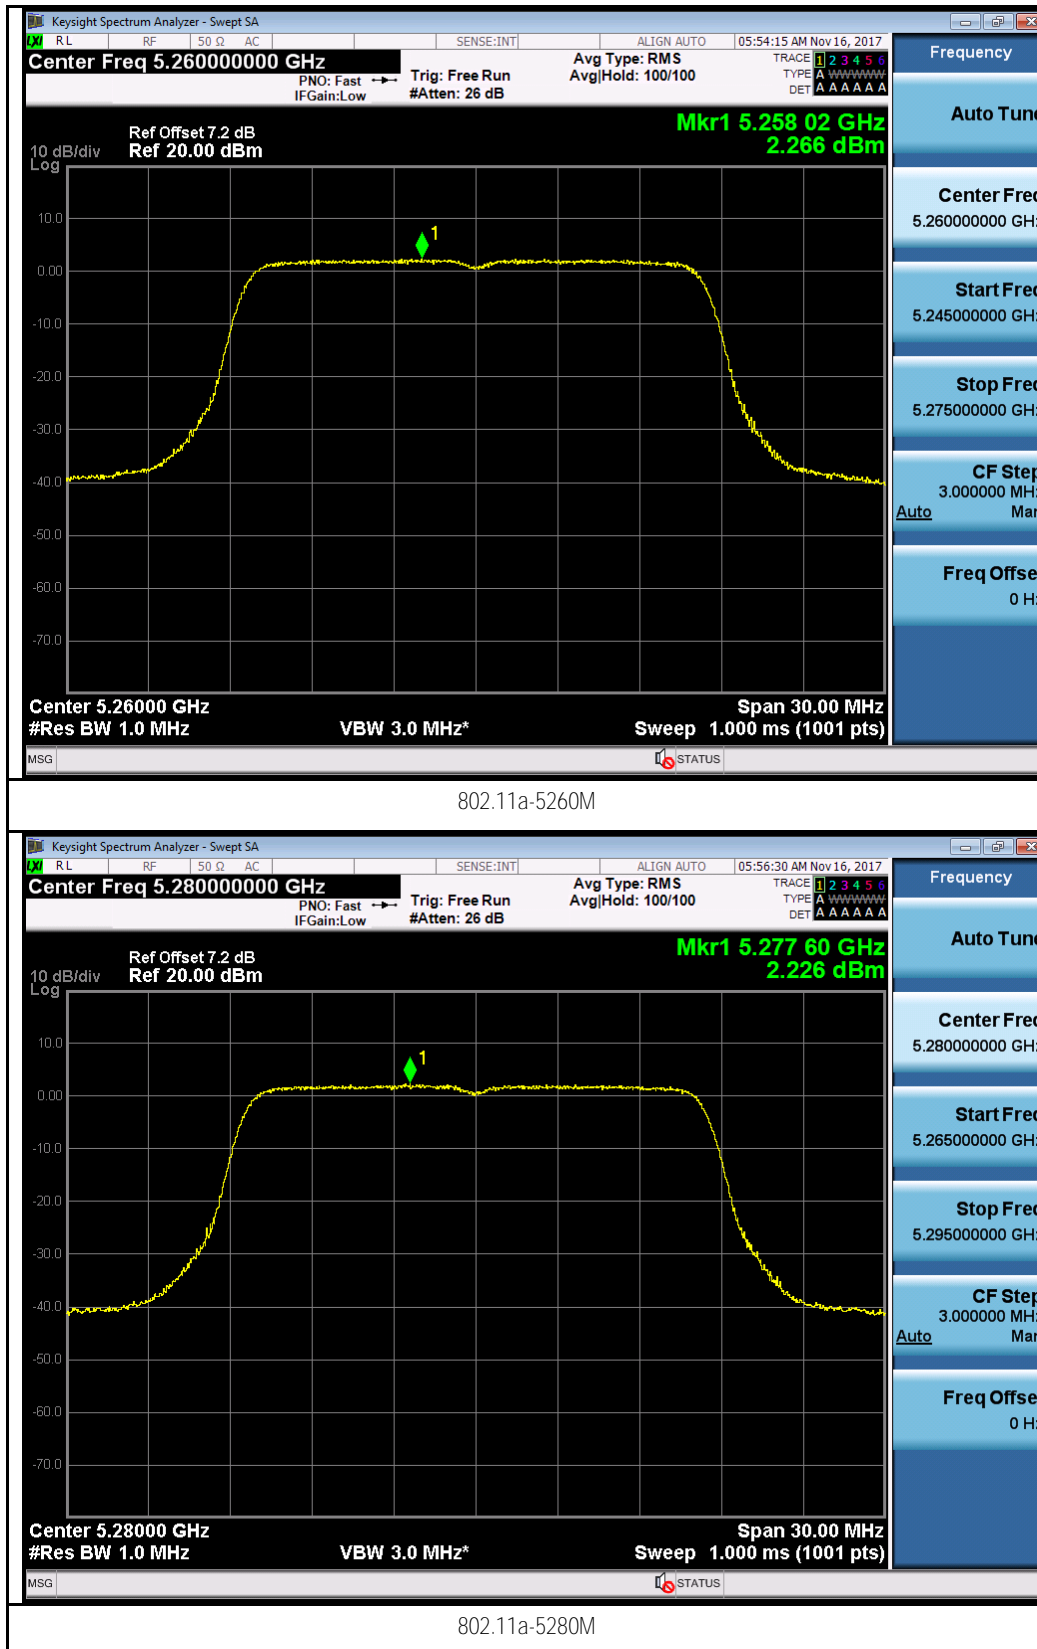


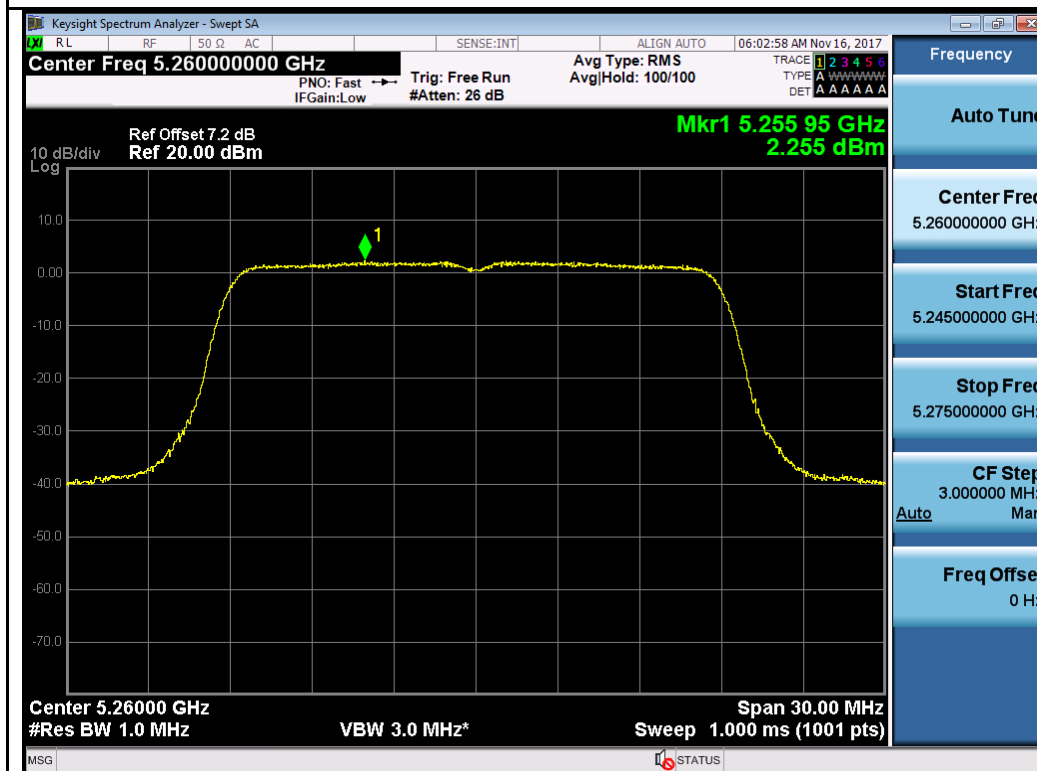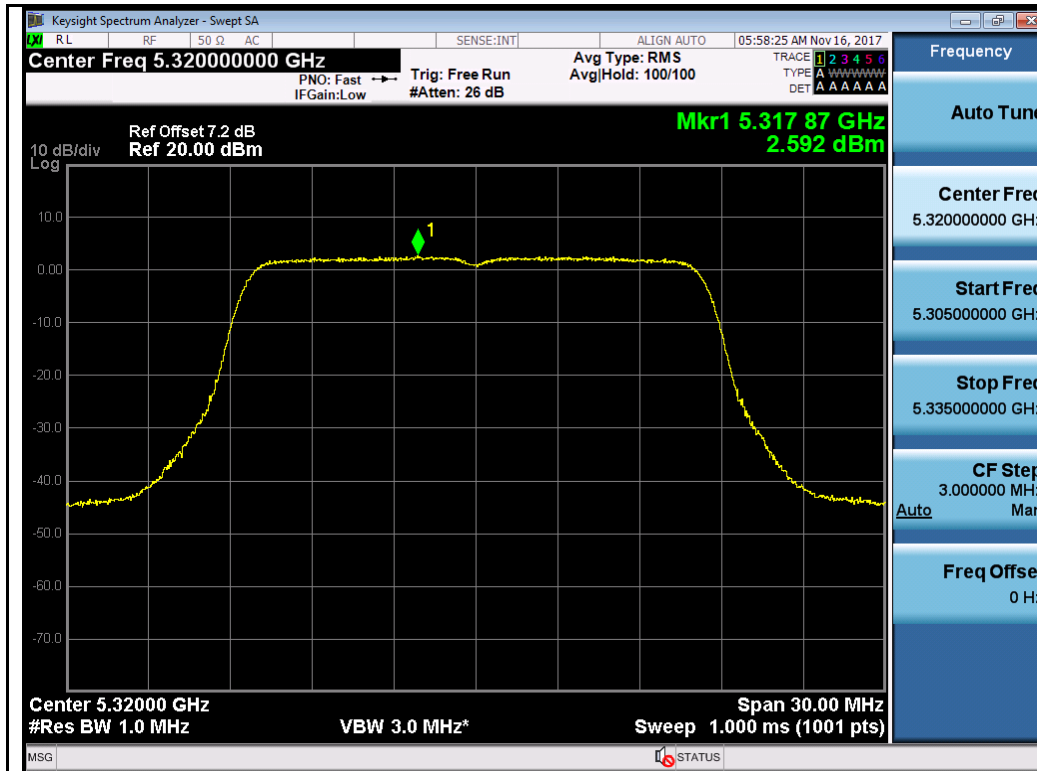

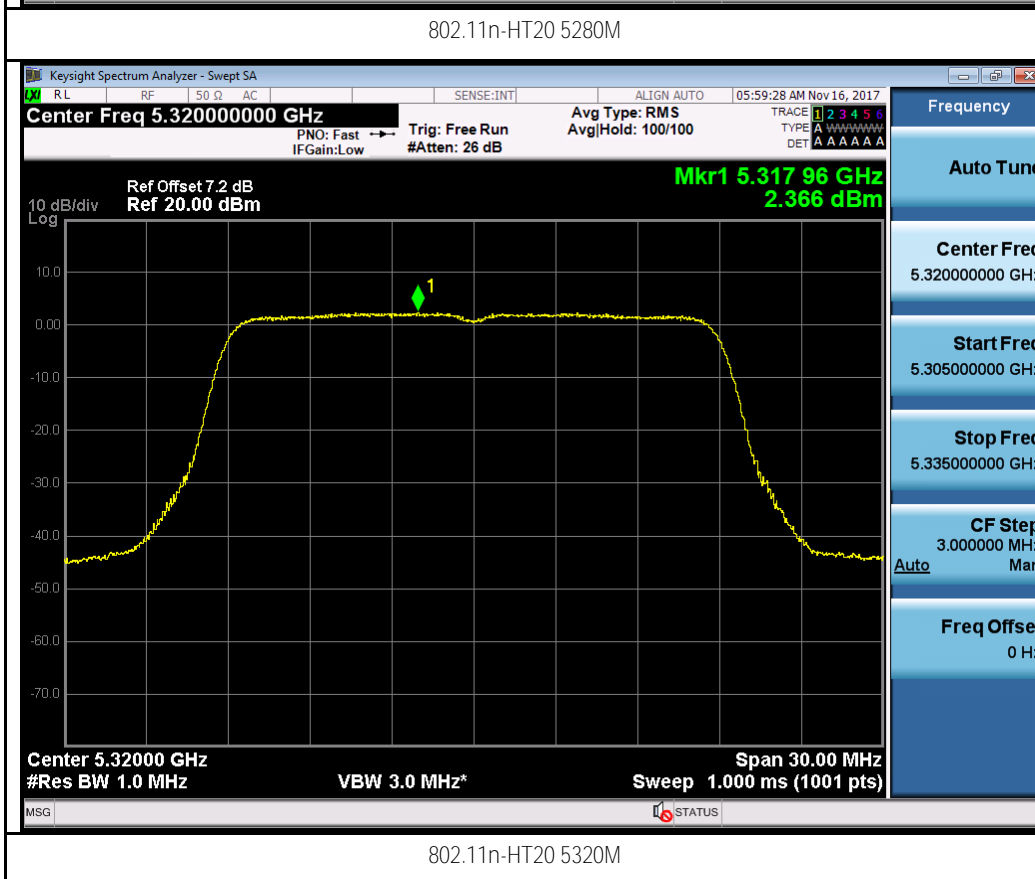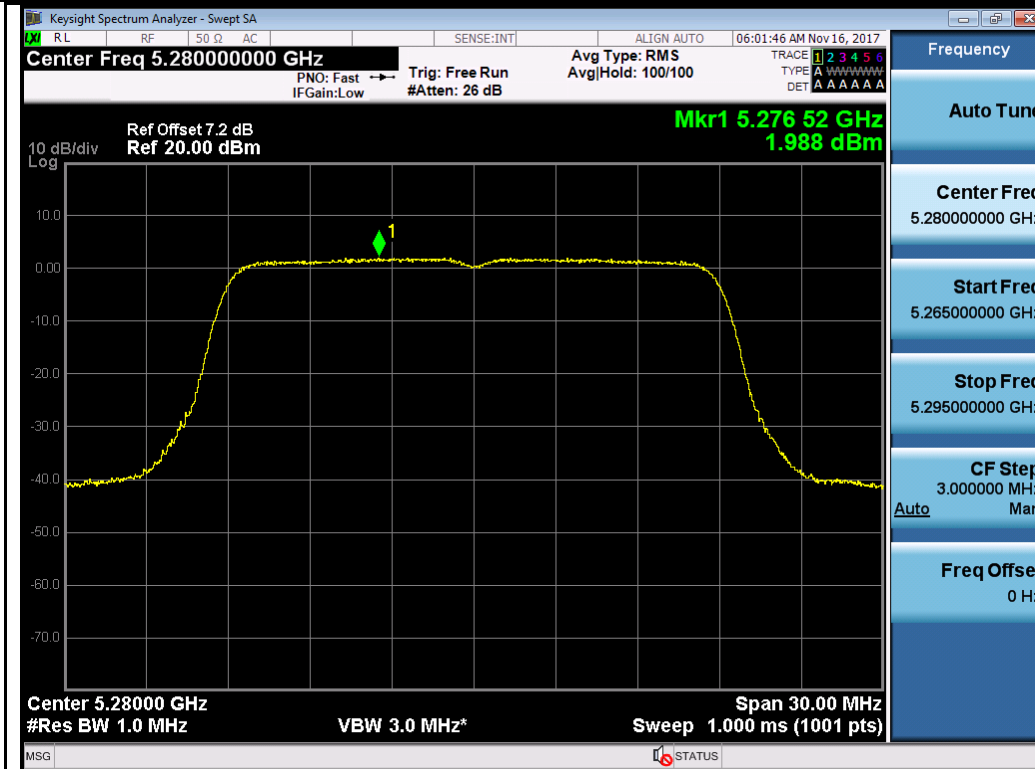


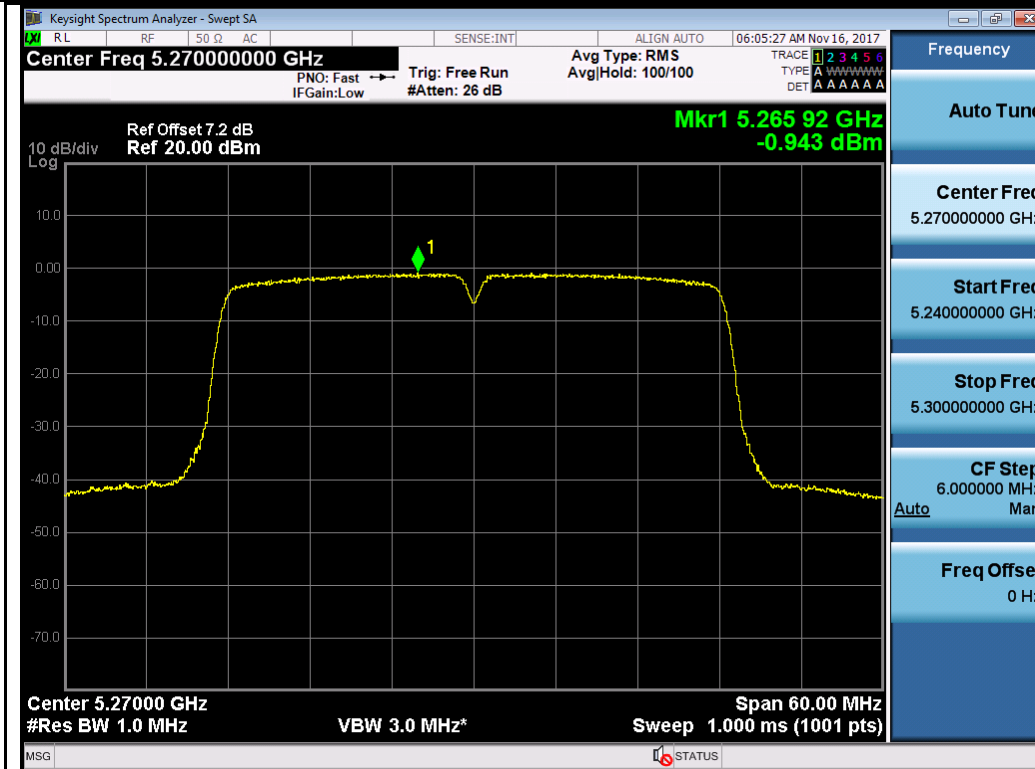

802.11n-HT40 5270M

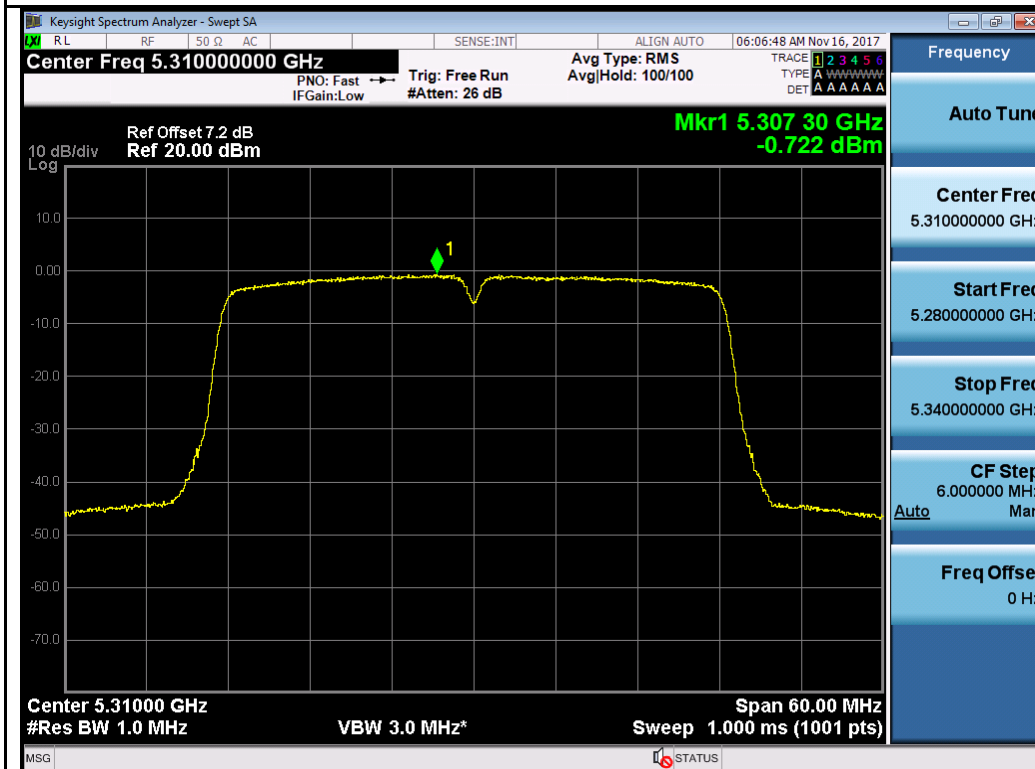




802.11n-HT40 5310M


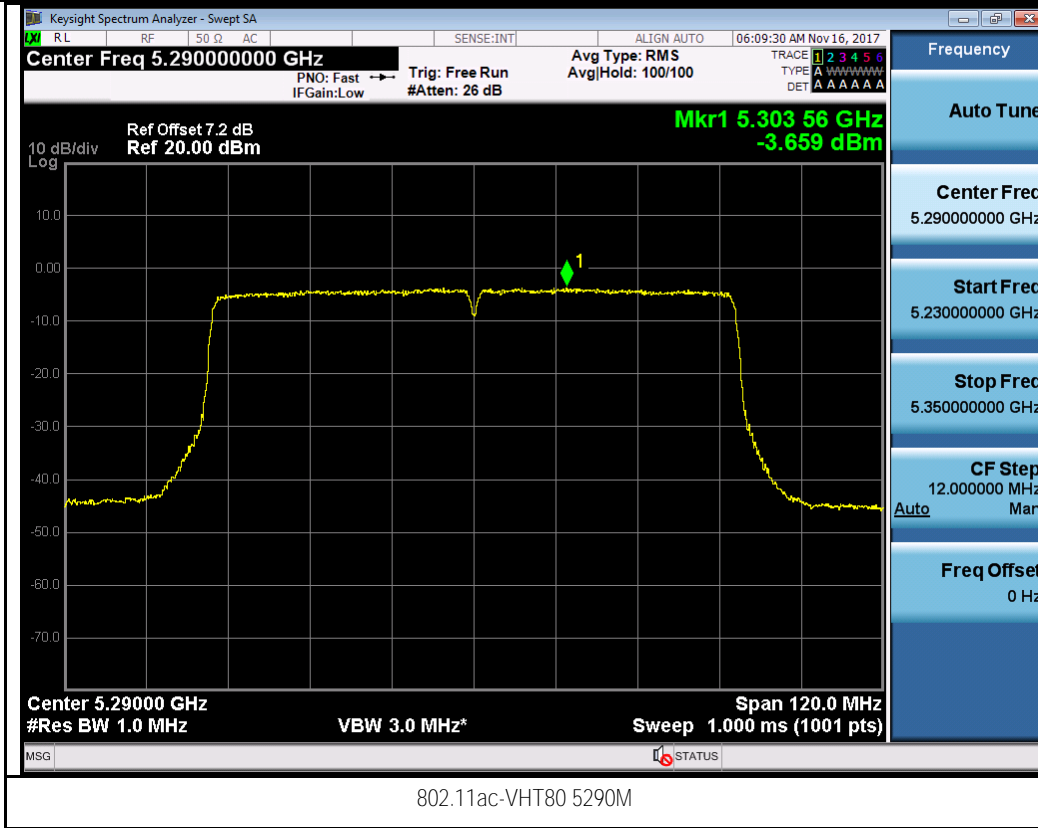




Test Plot for W56:



Chain 0:

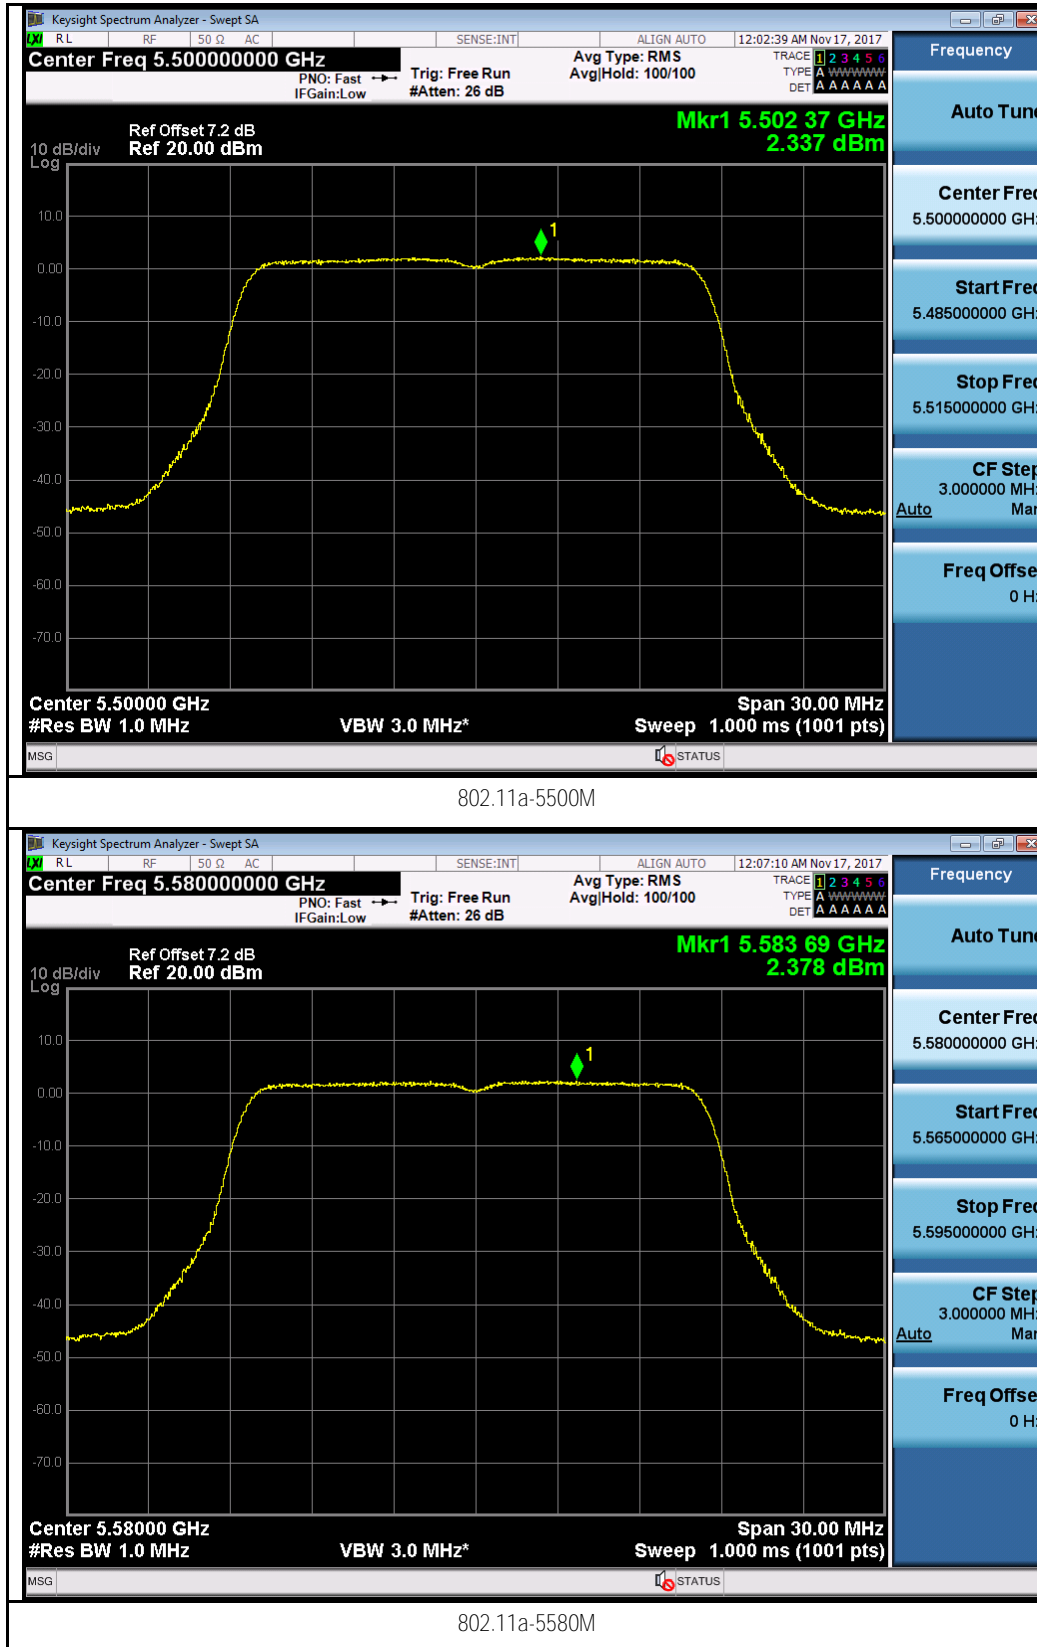


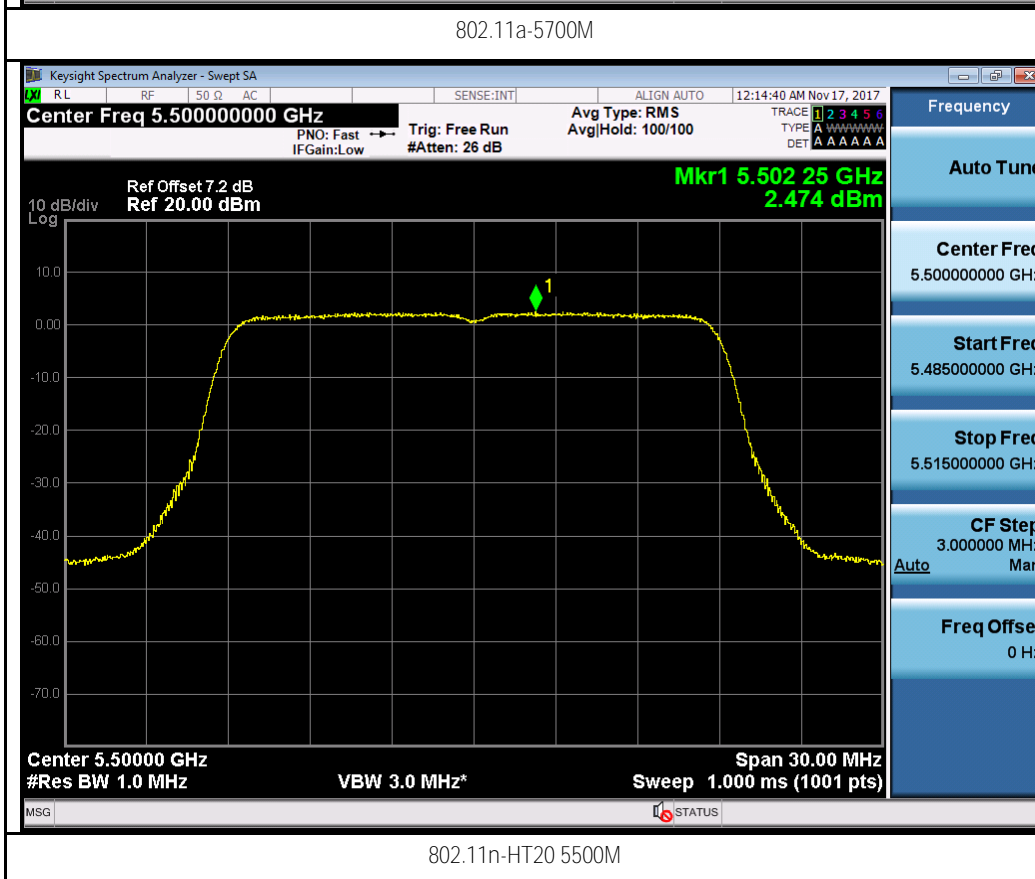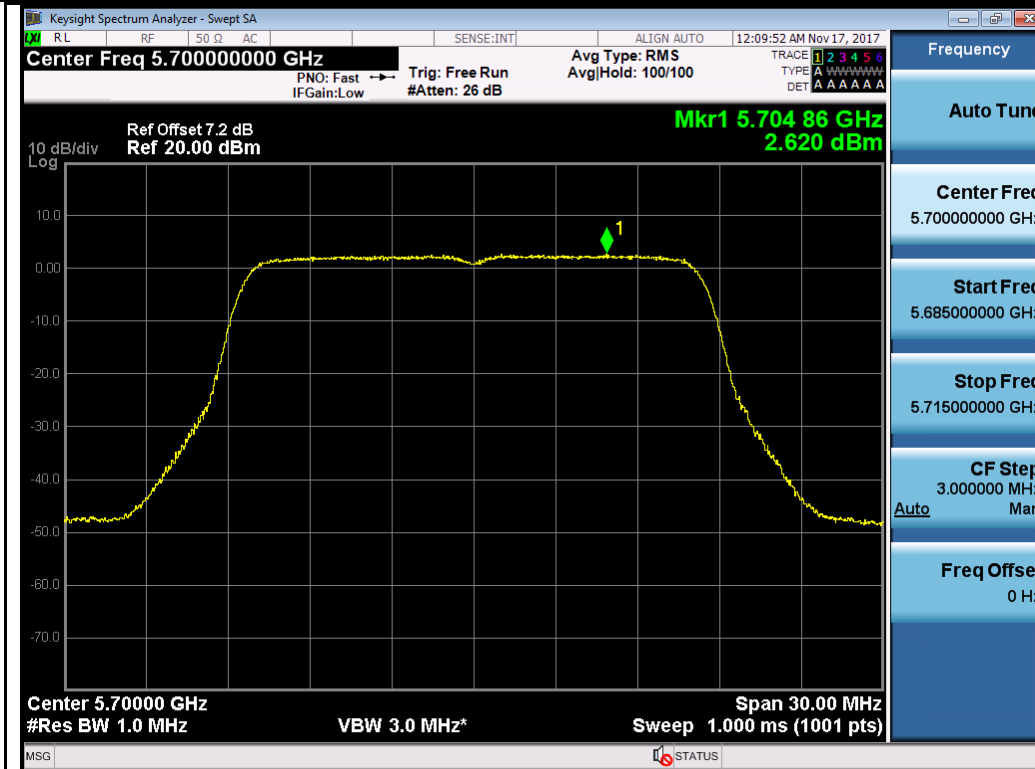

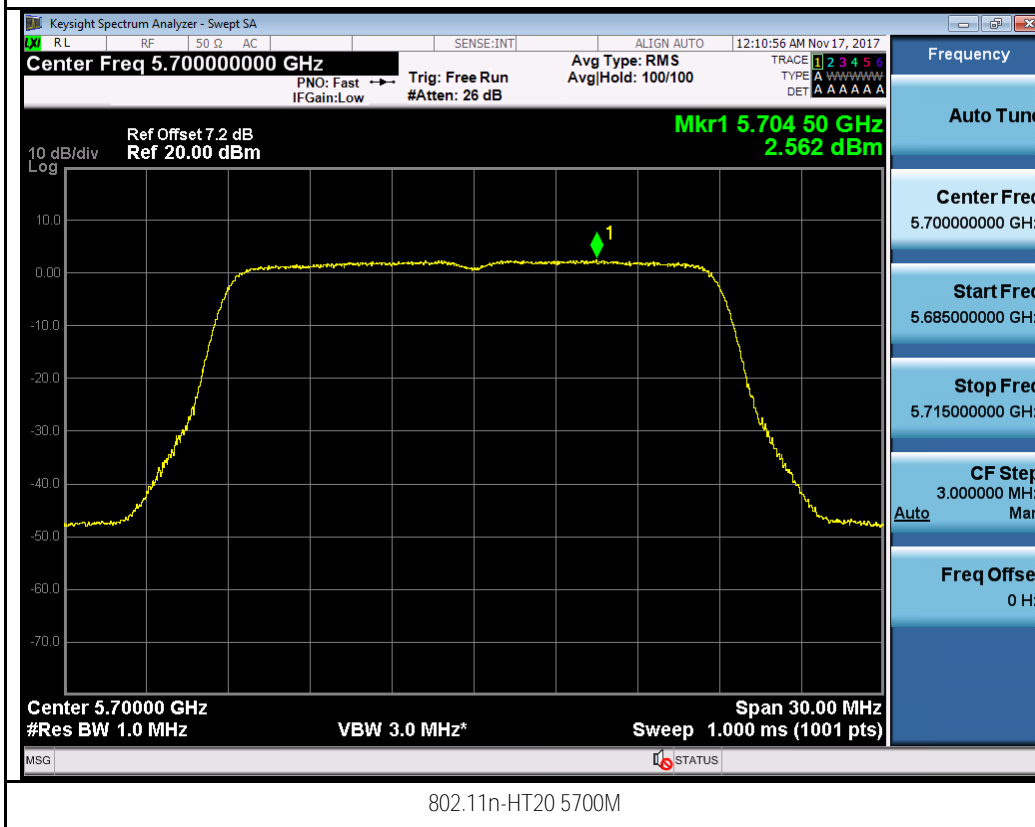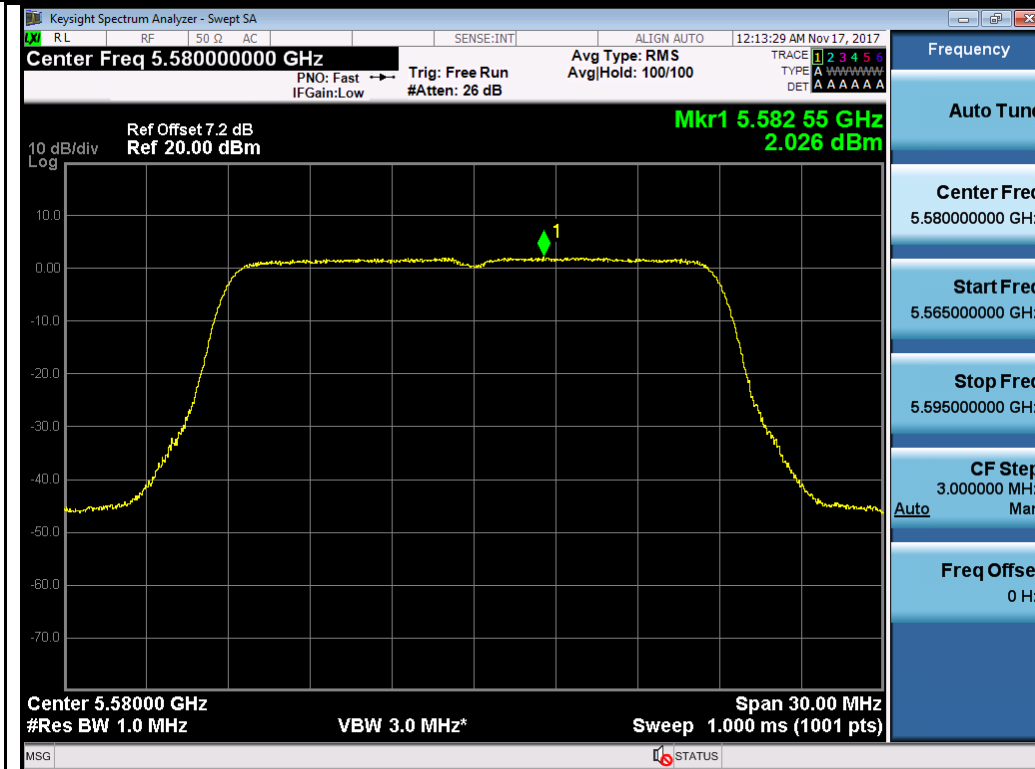


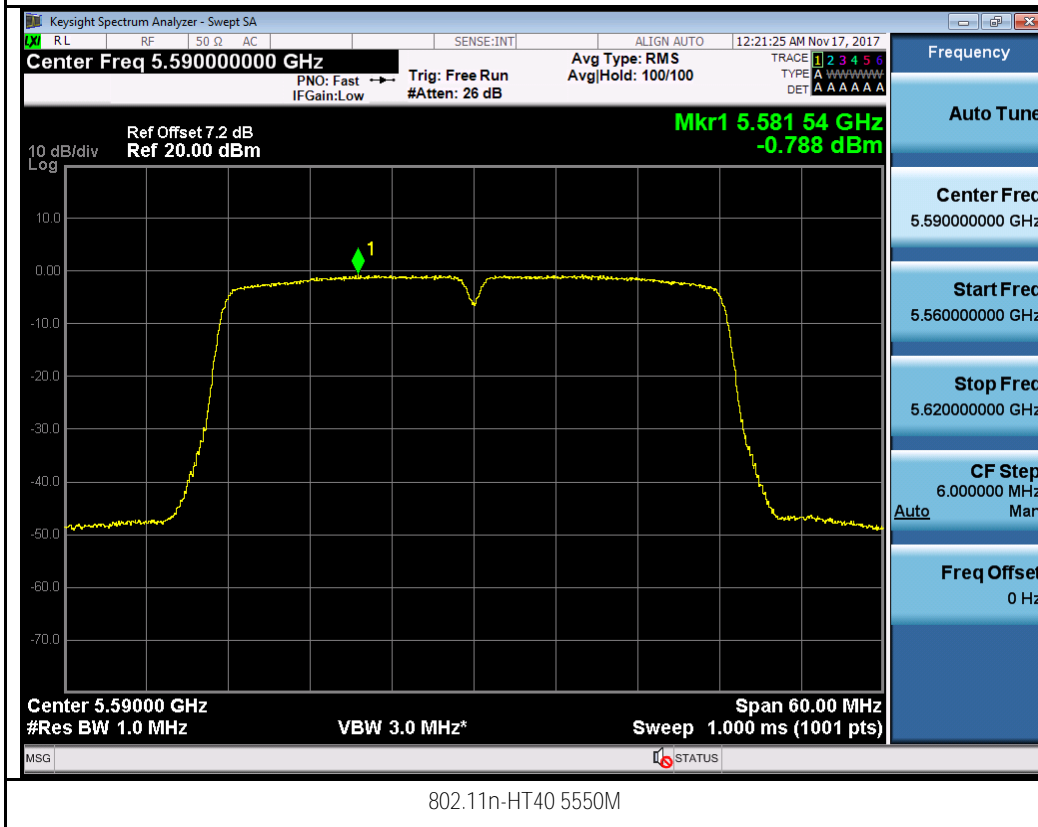
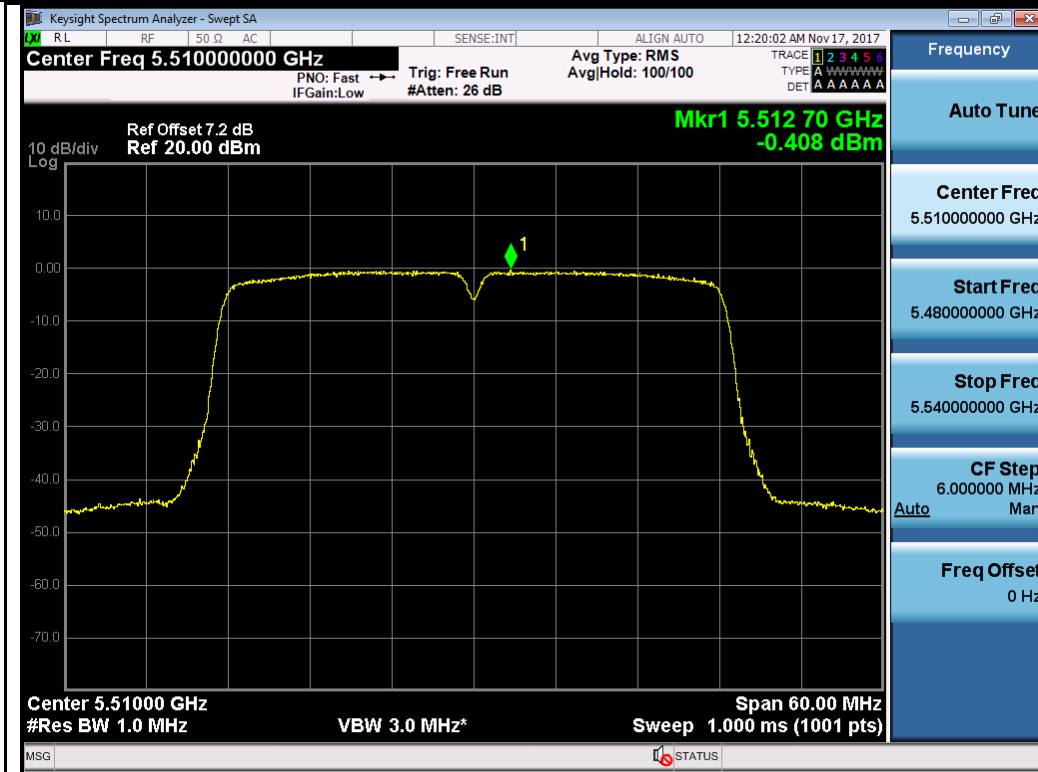


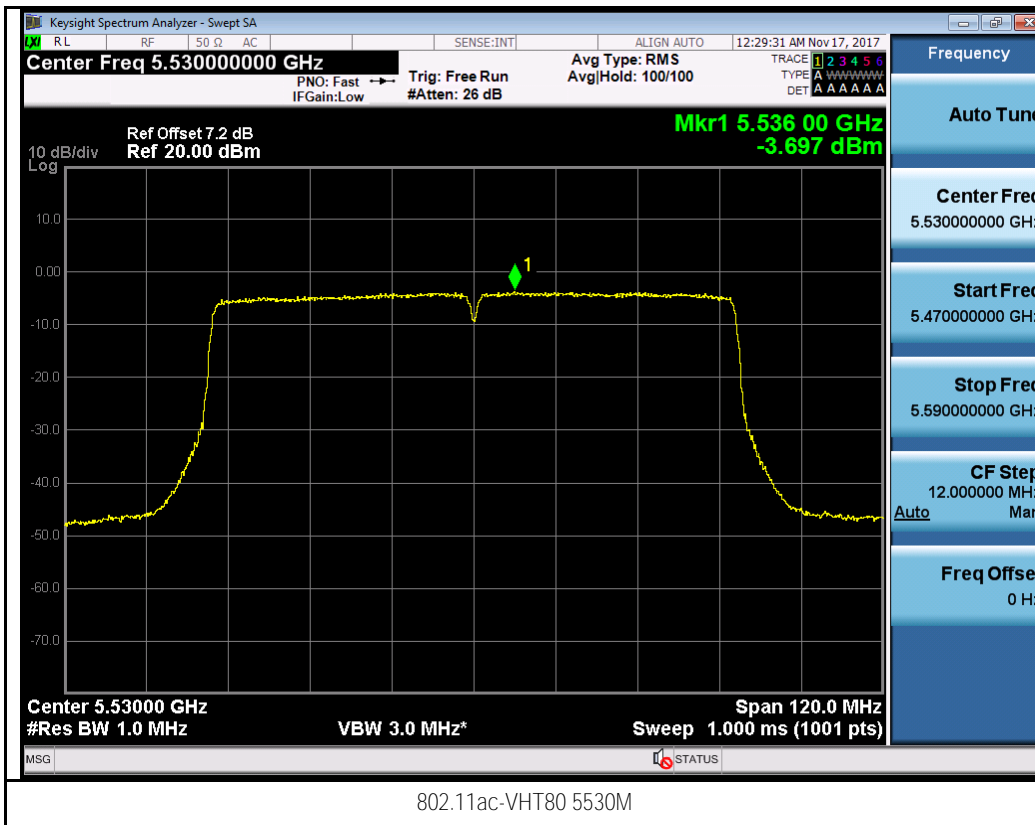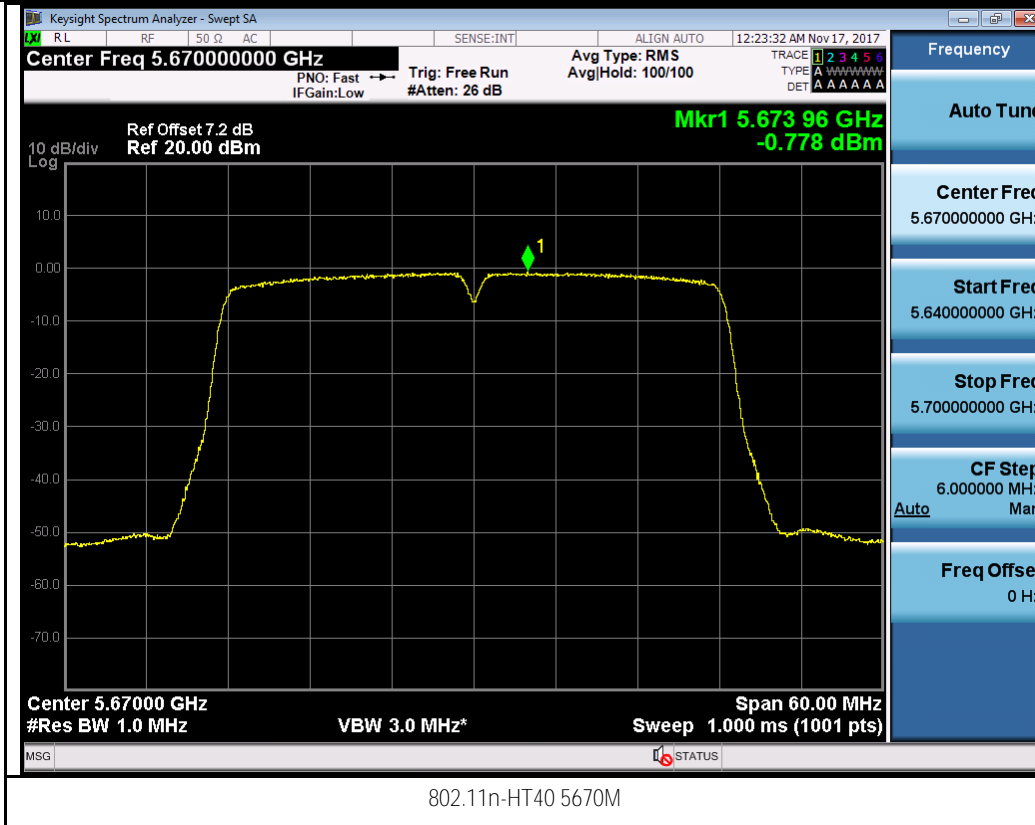


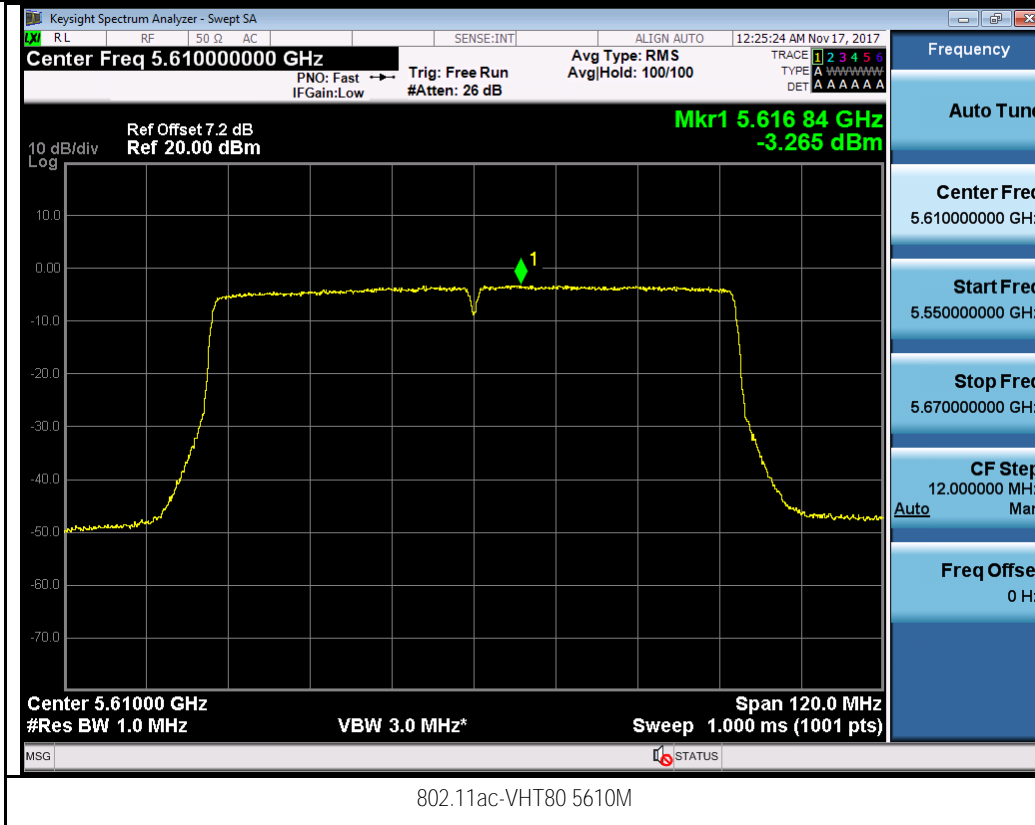


Chain 1:

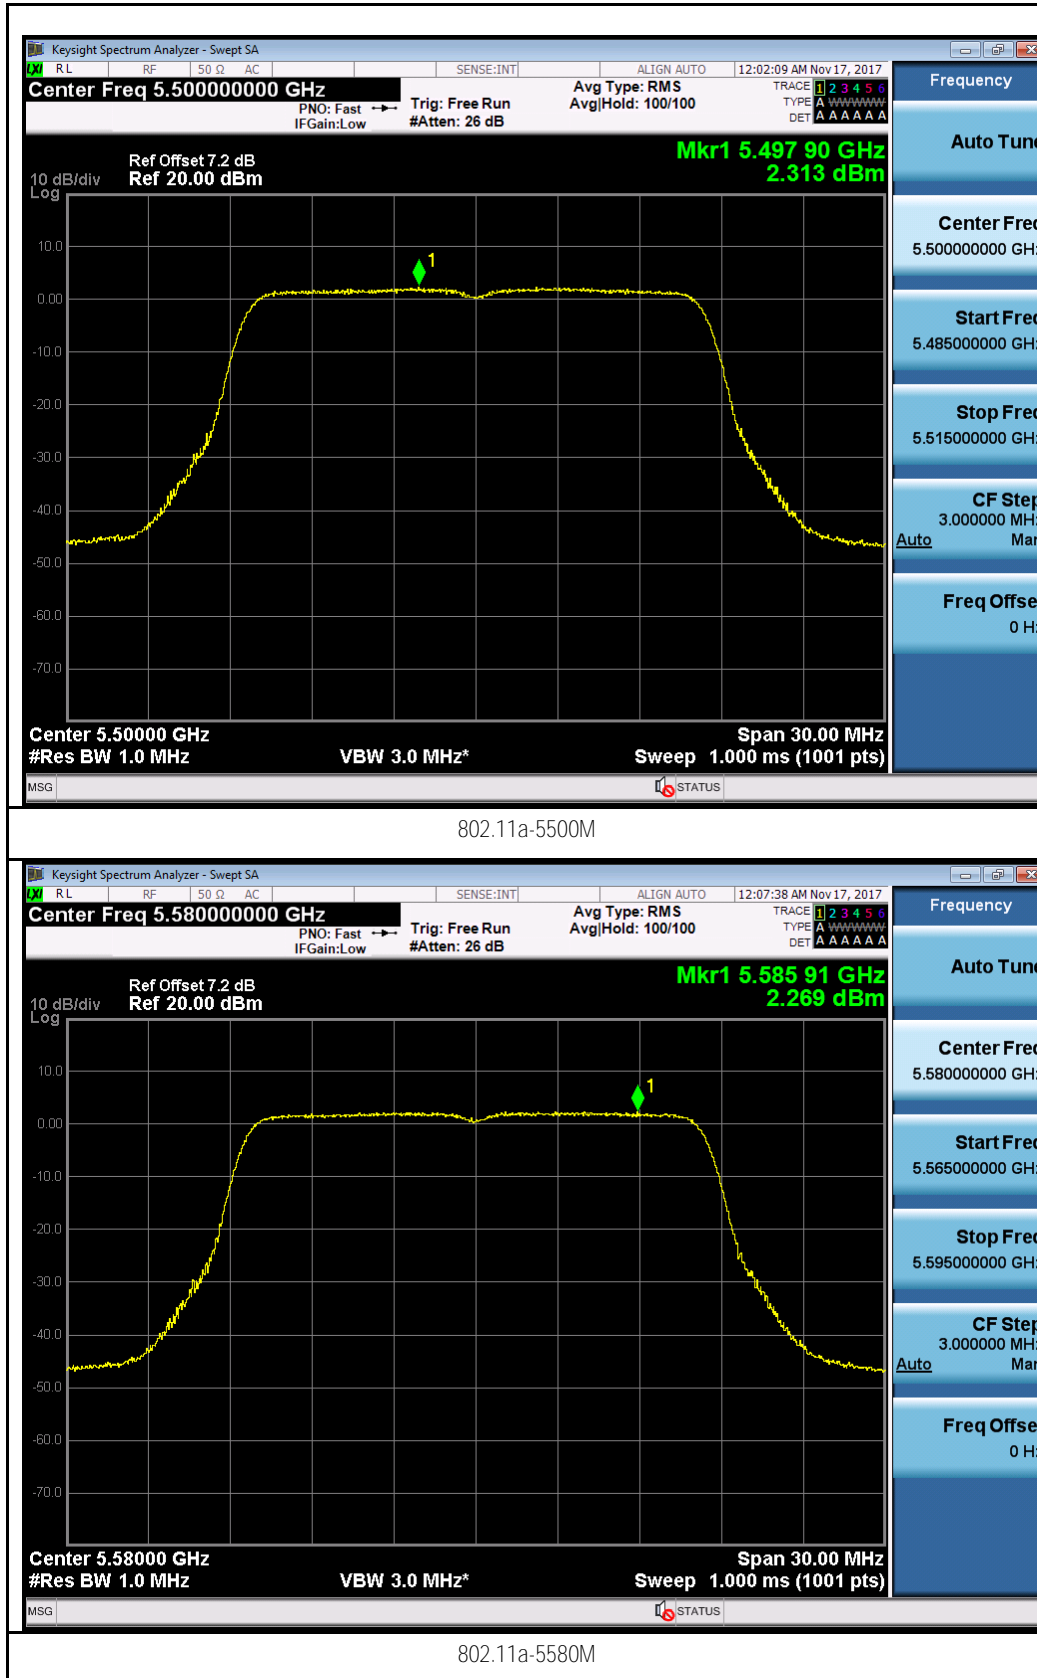

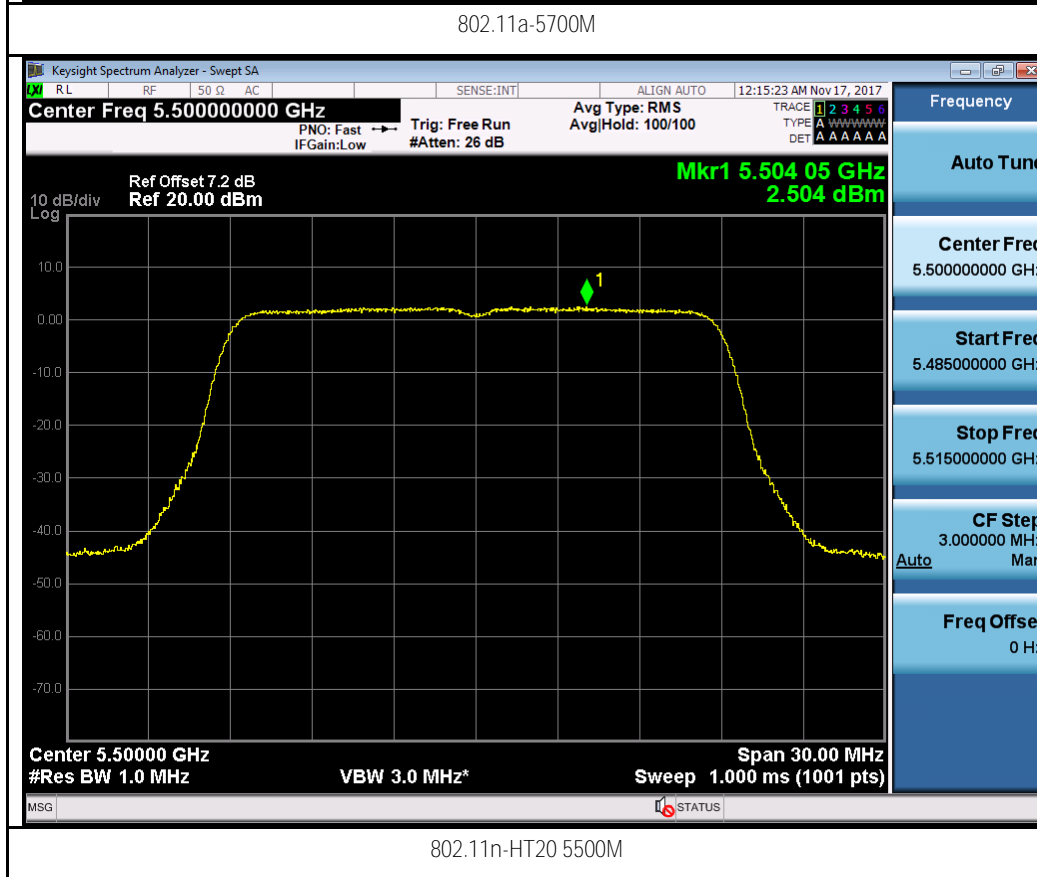
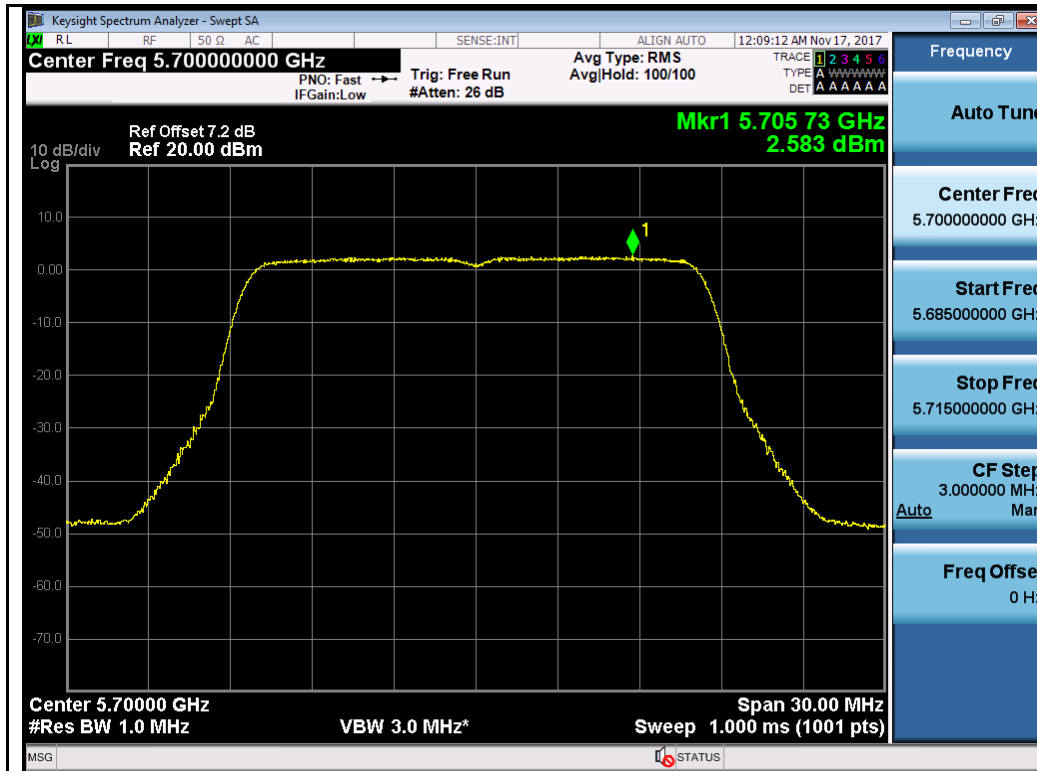



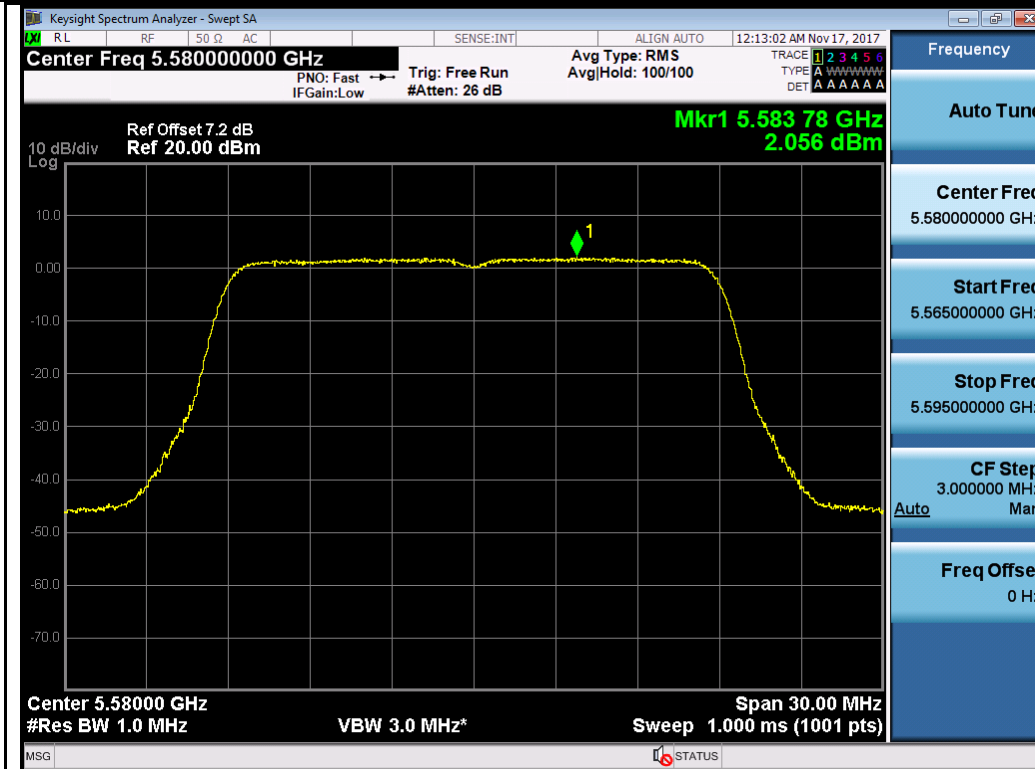



802.11n-HT20 5580M

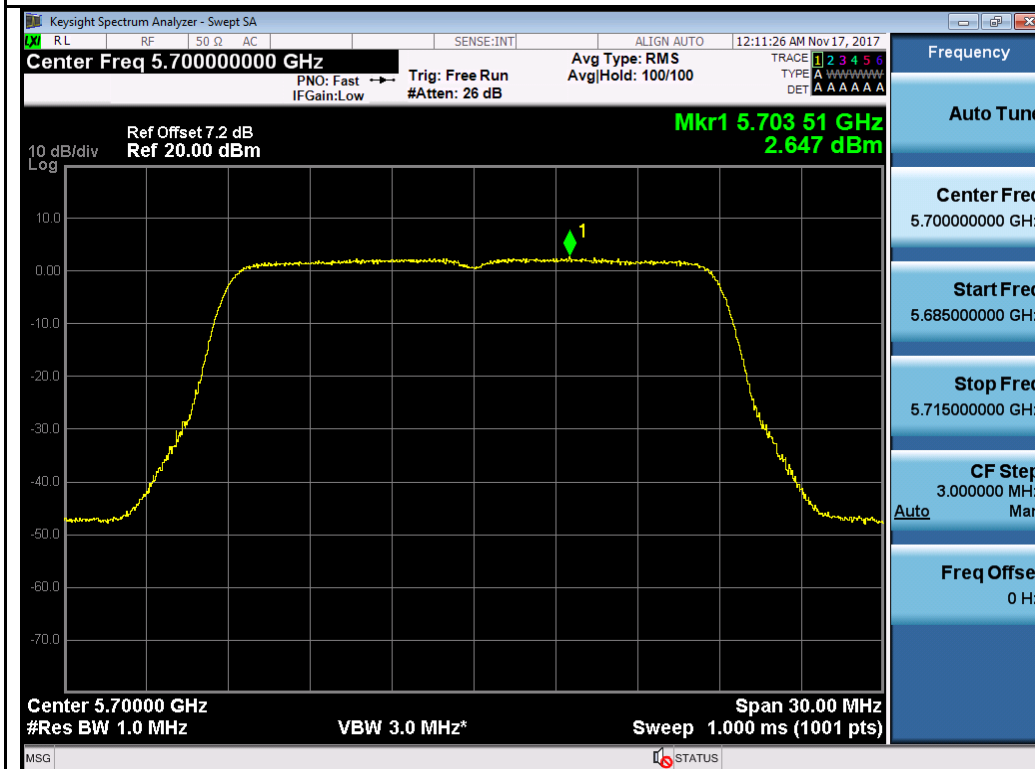


802.11n-HT20 5700M

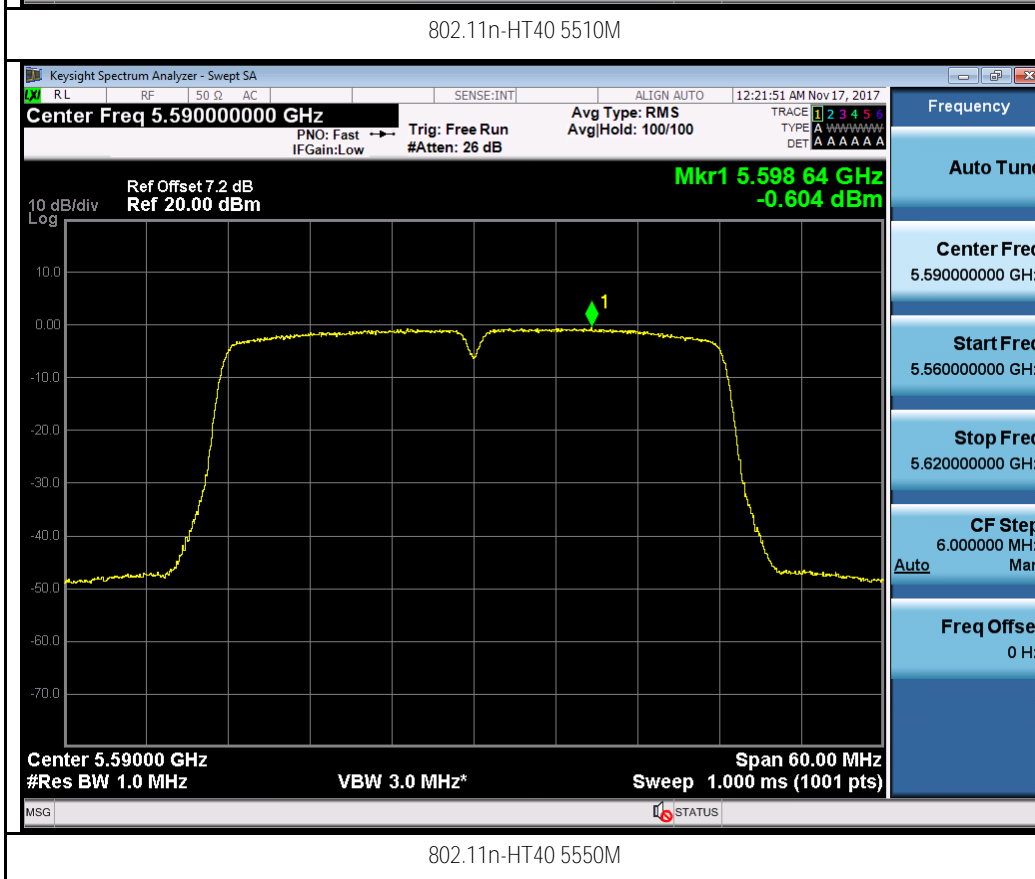
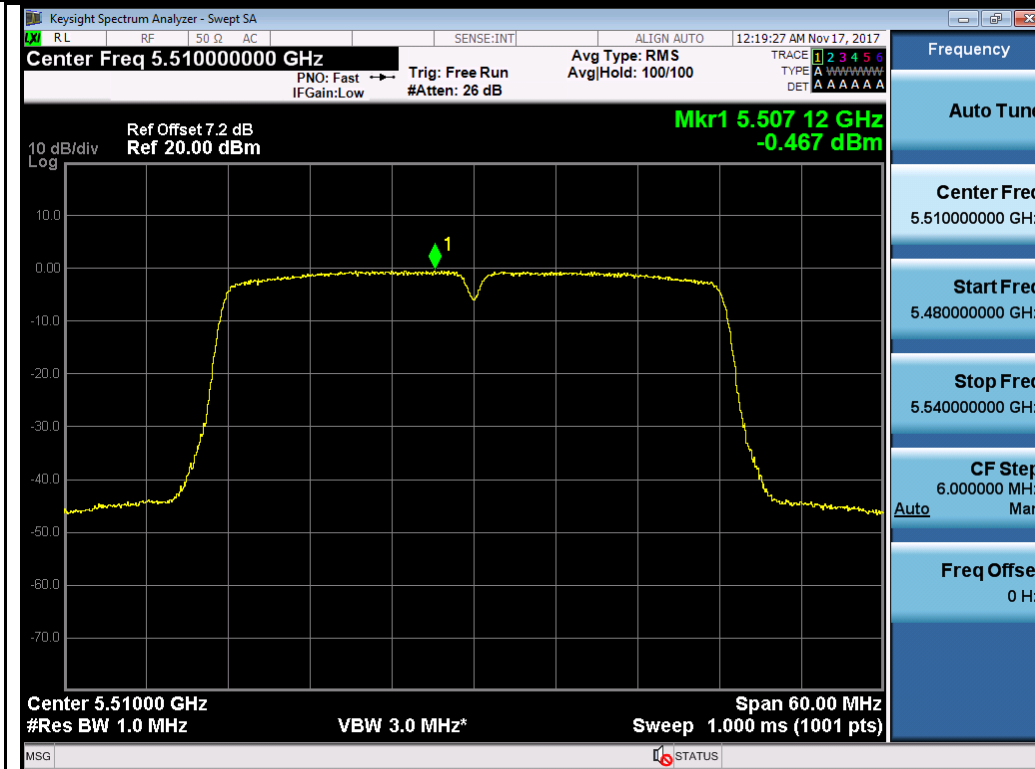


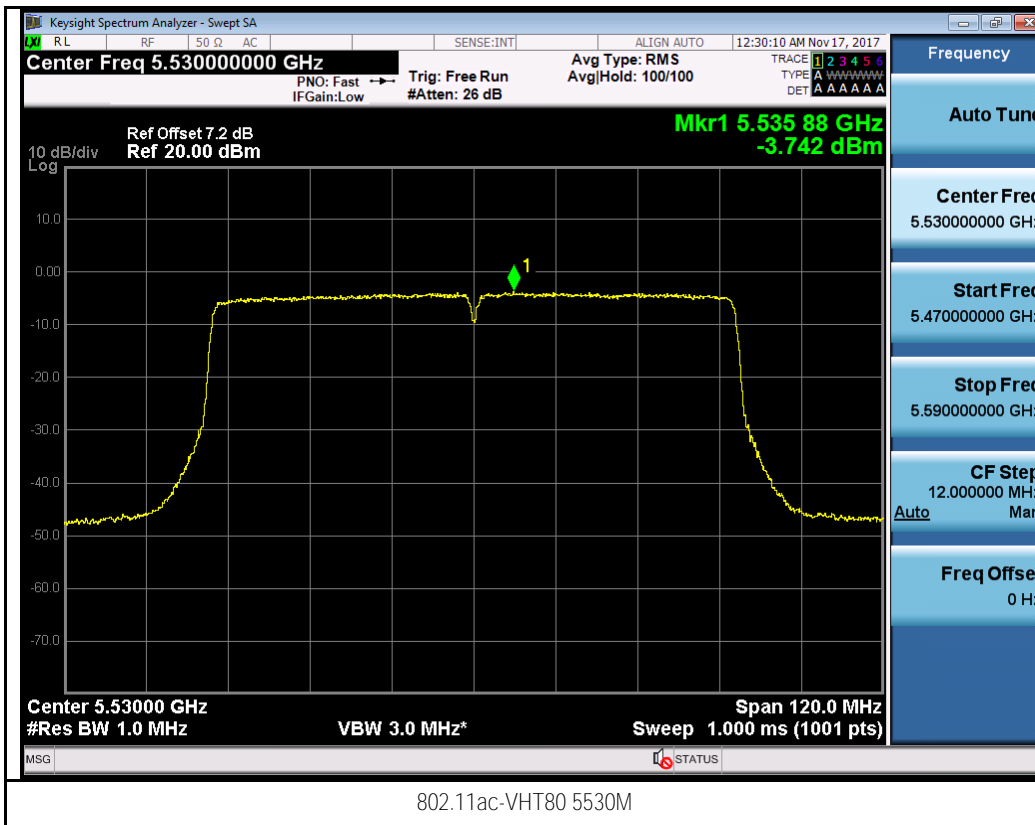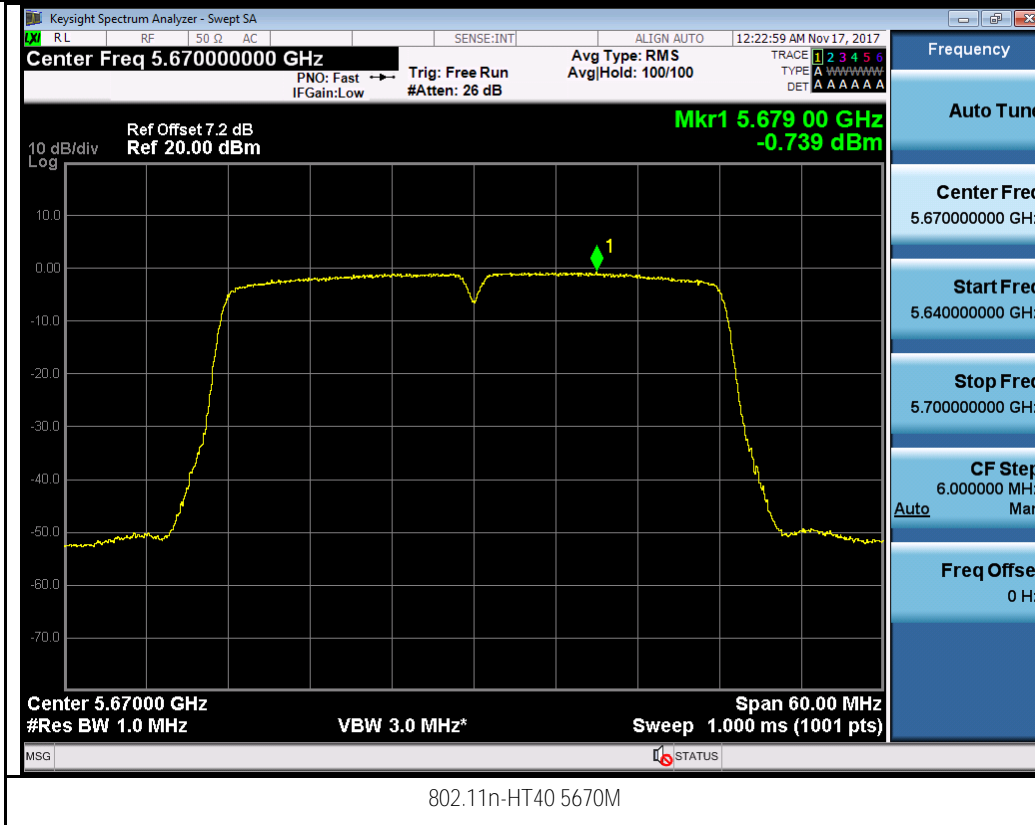


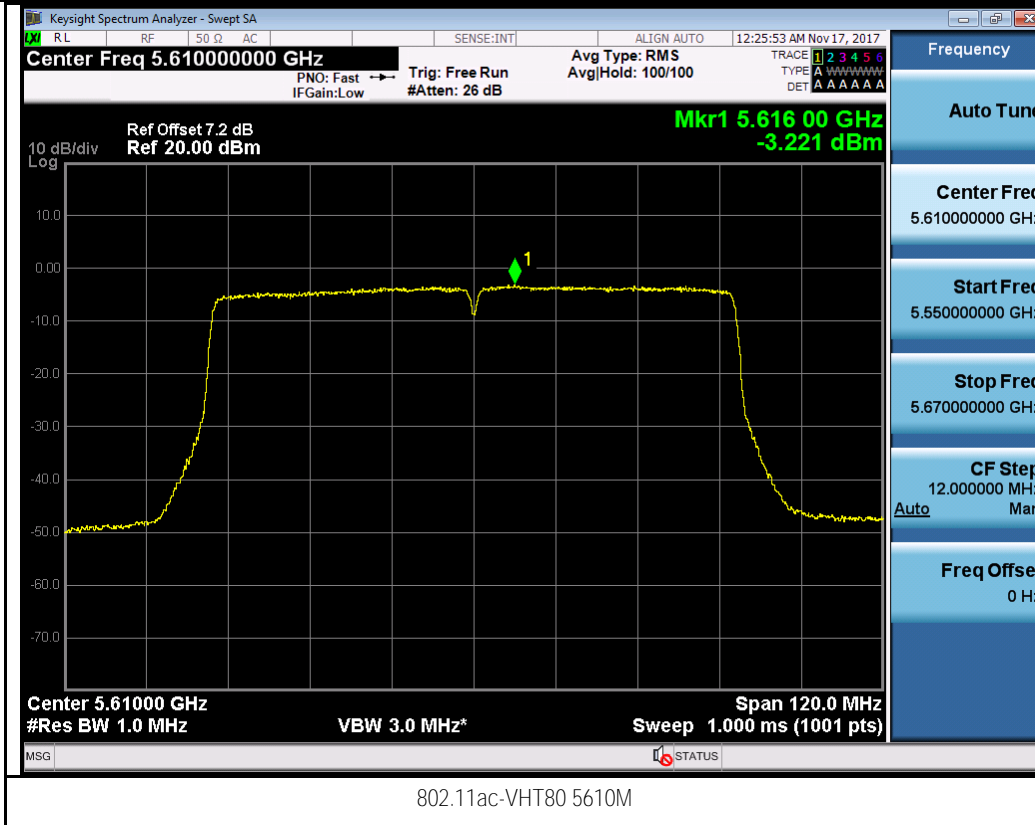



Test Plot for Crossband (W56 procedure):
Chain 0:

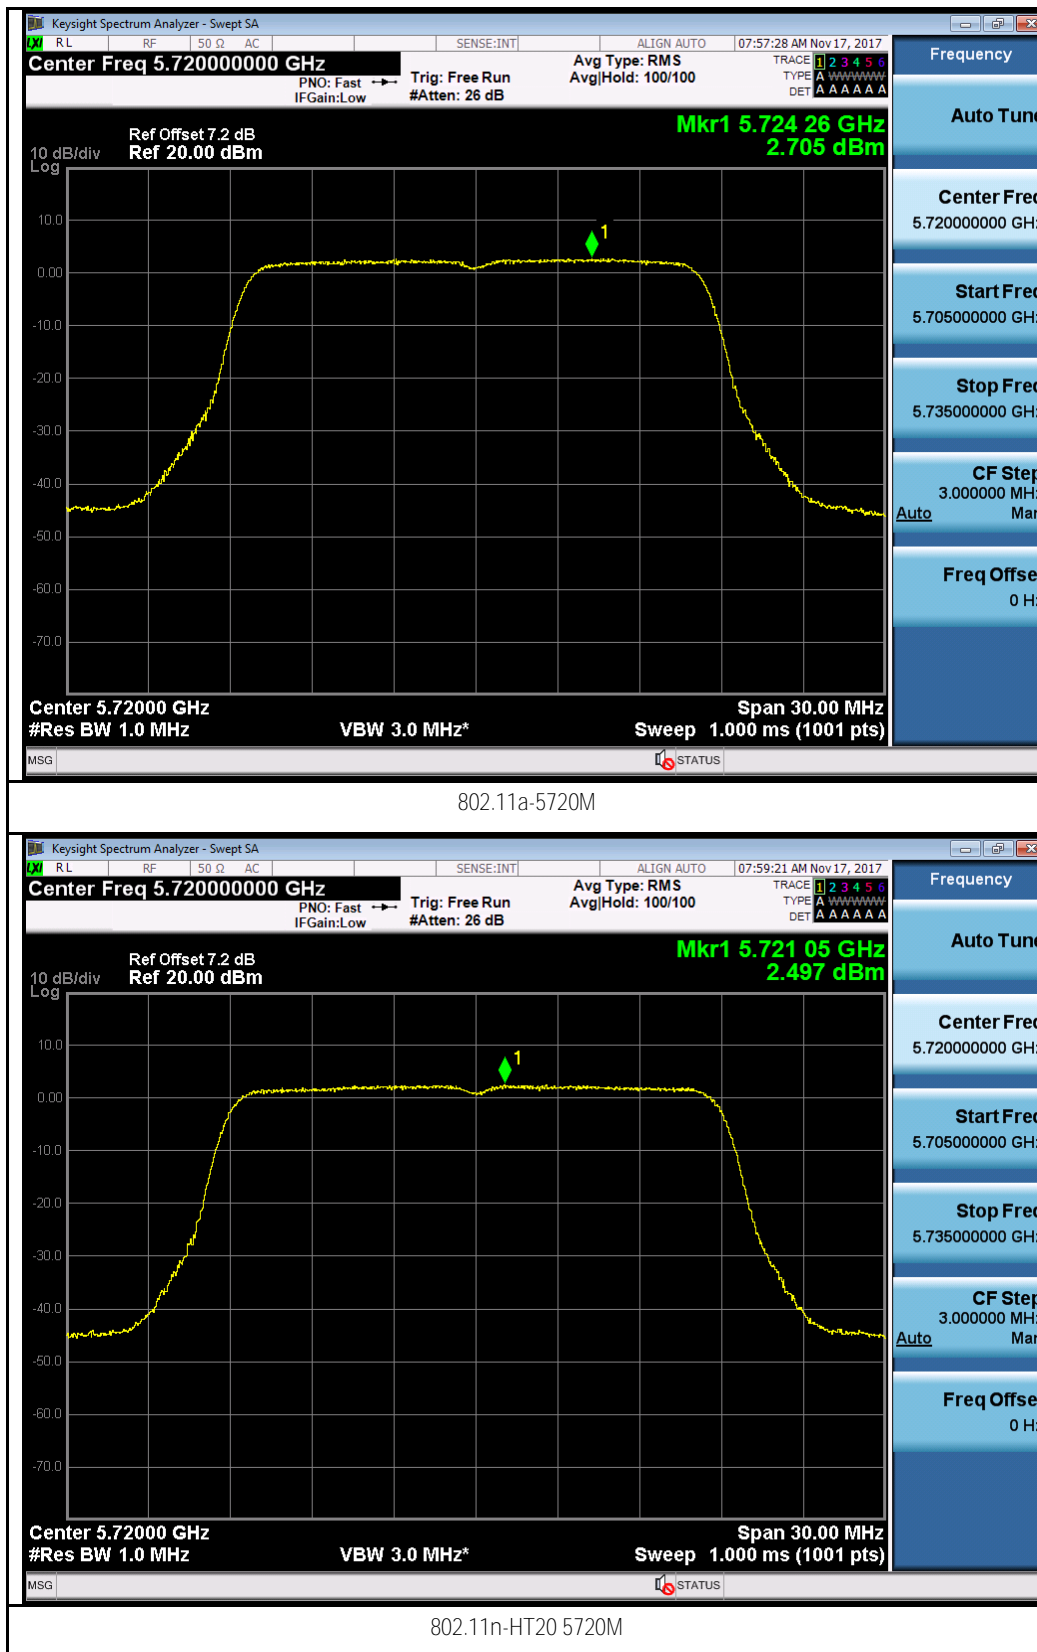

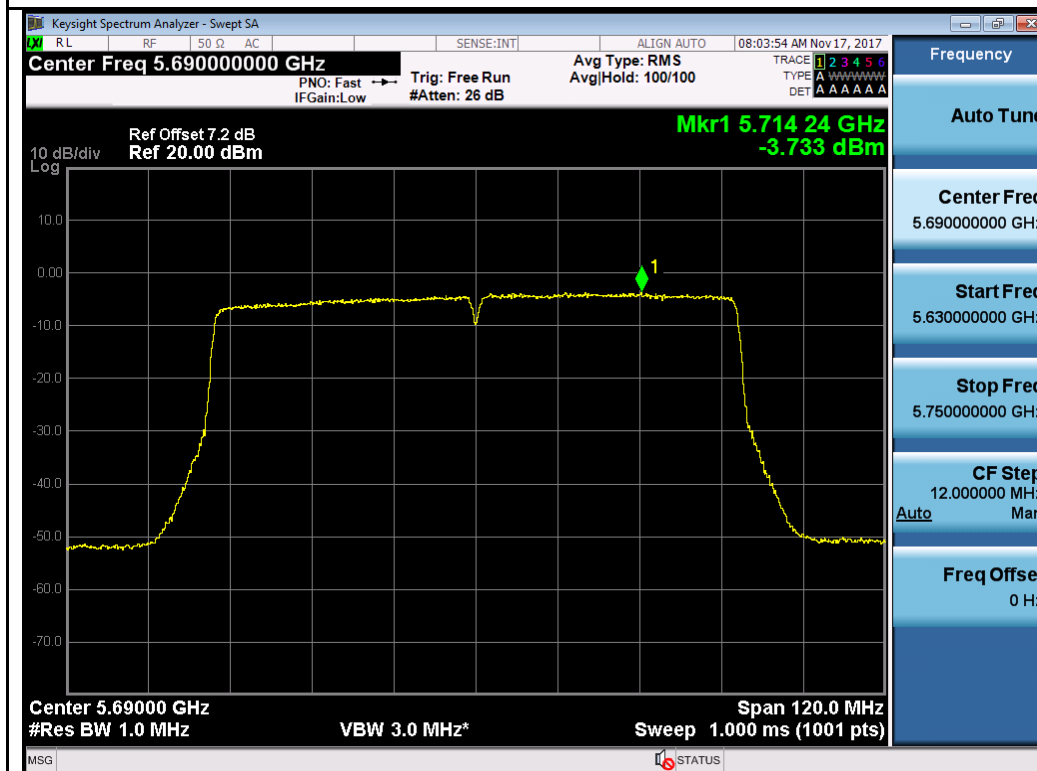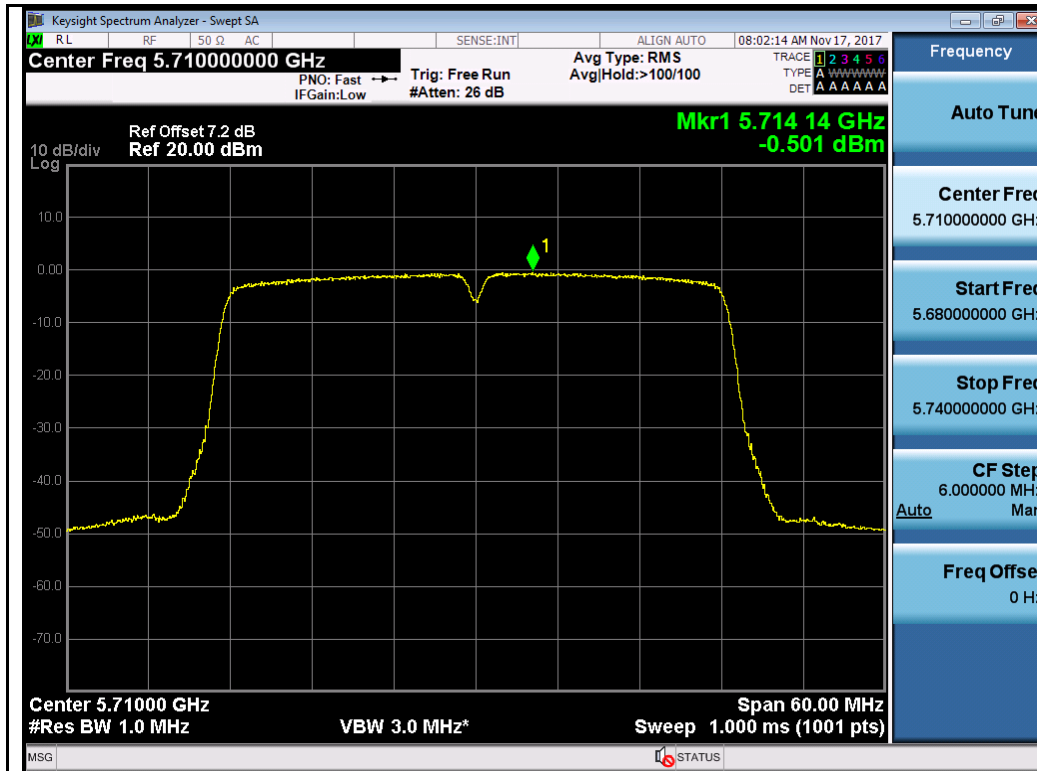


Chain 1:

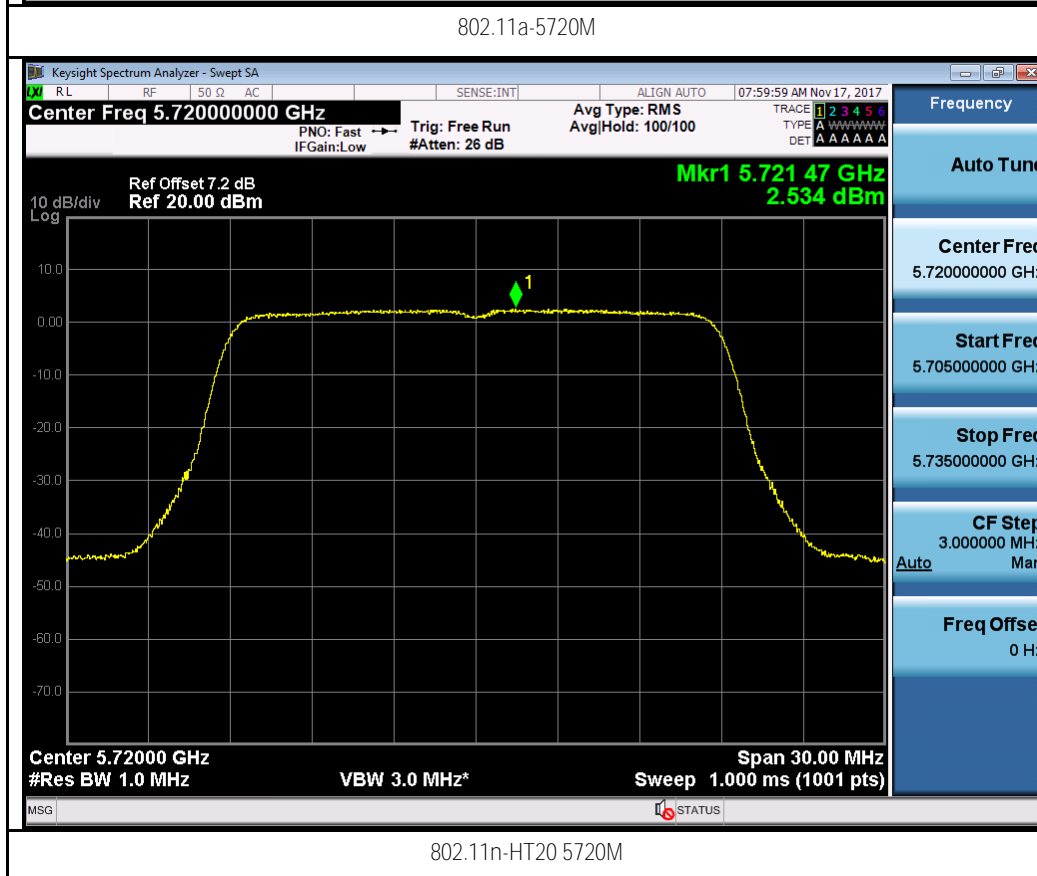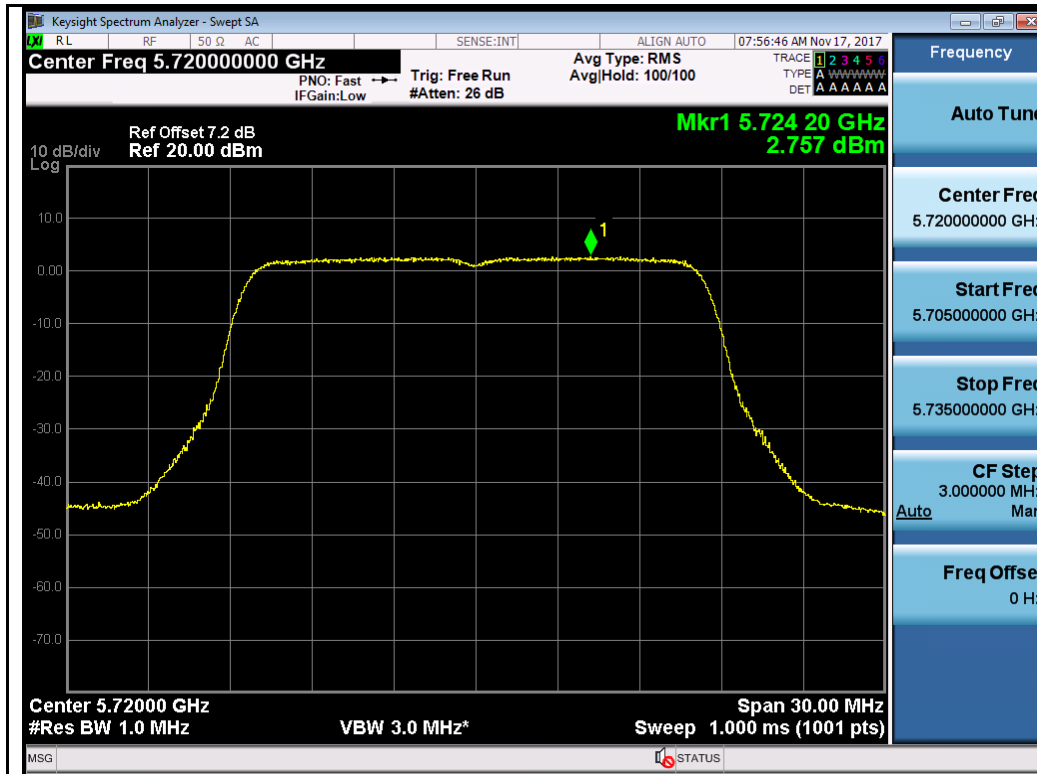


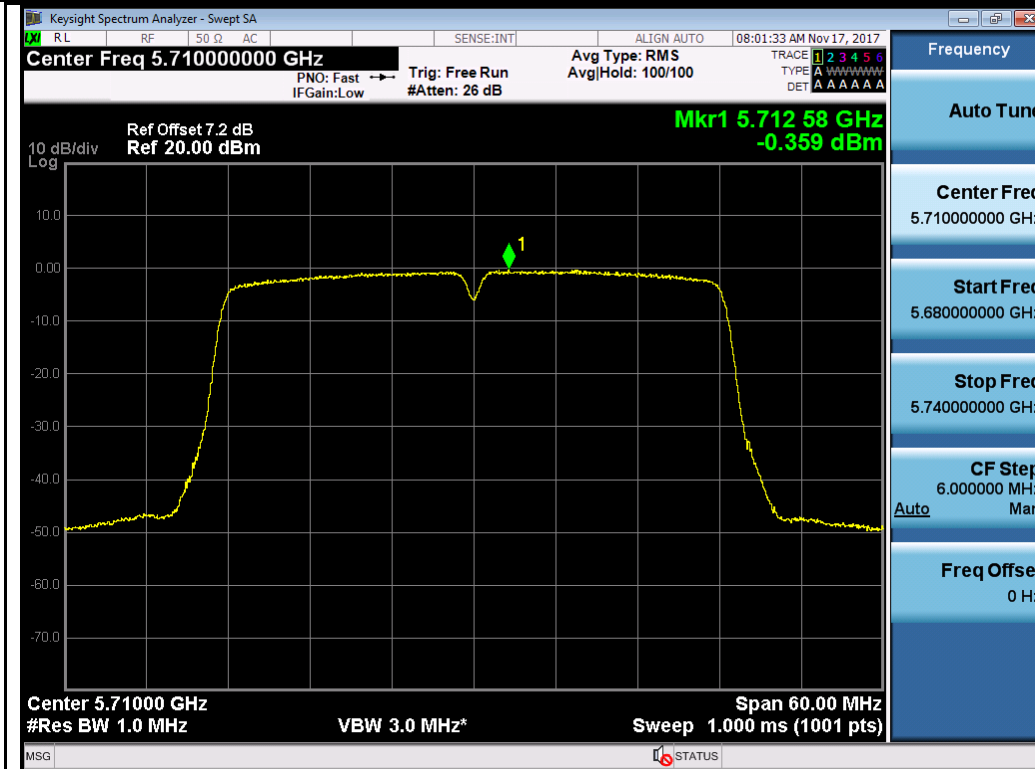



802.11n-HT40 5710M

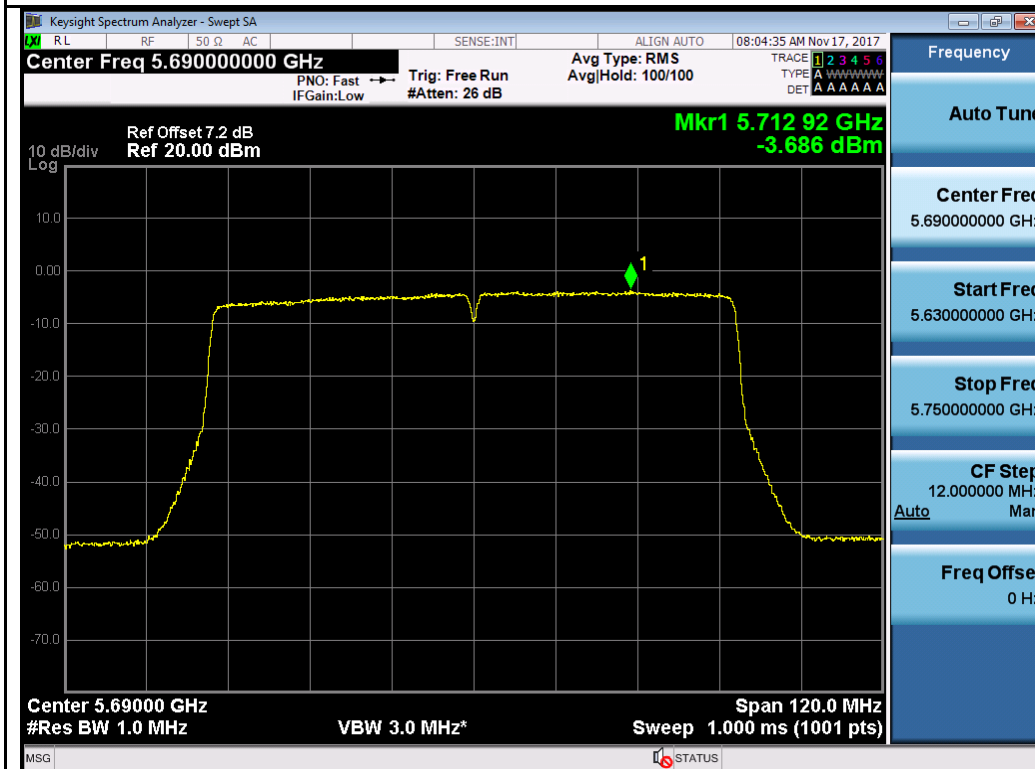


802.11ac-VHT80 5690M

Test Plot for Crossband (W58 procedure):
Chain 0:

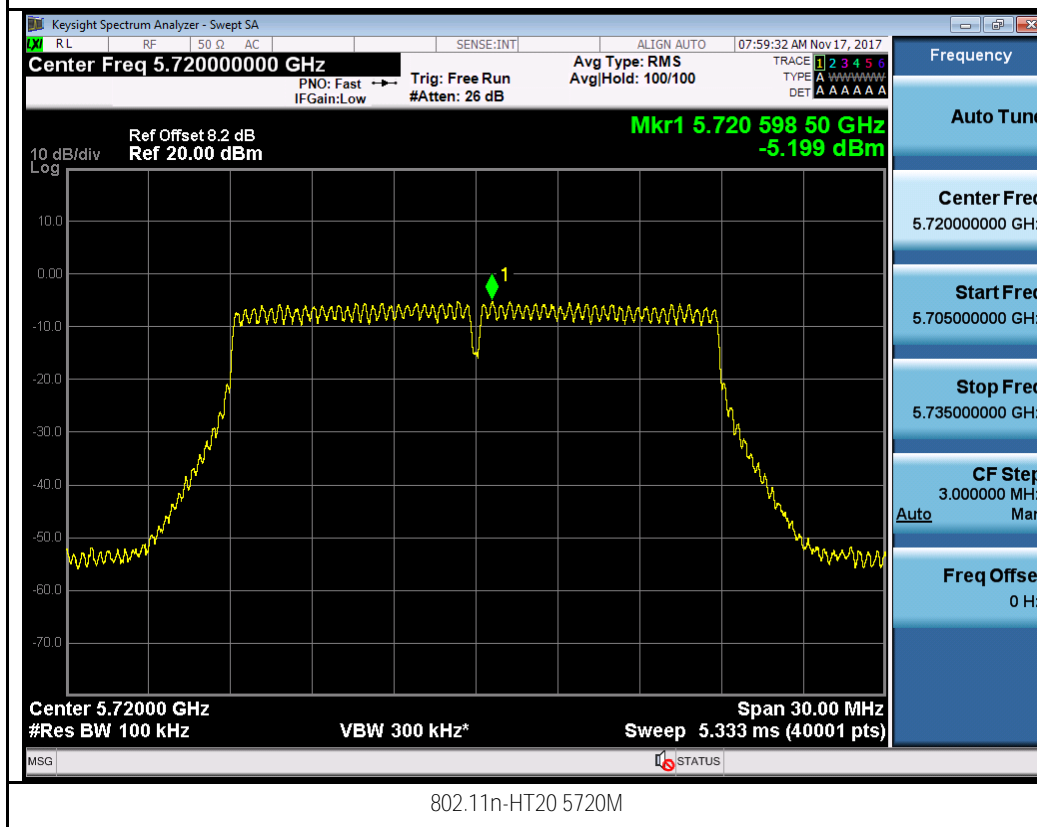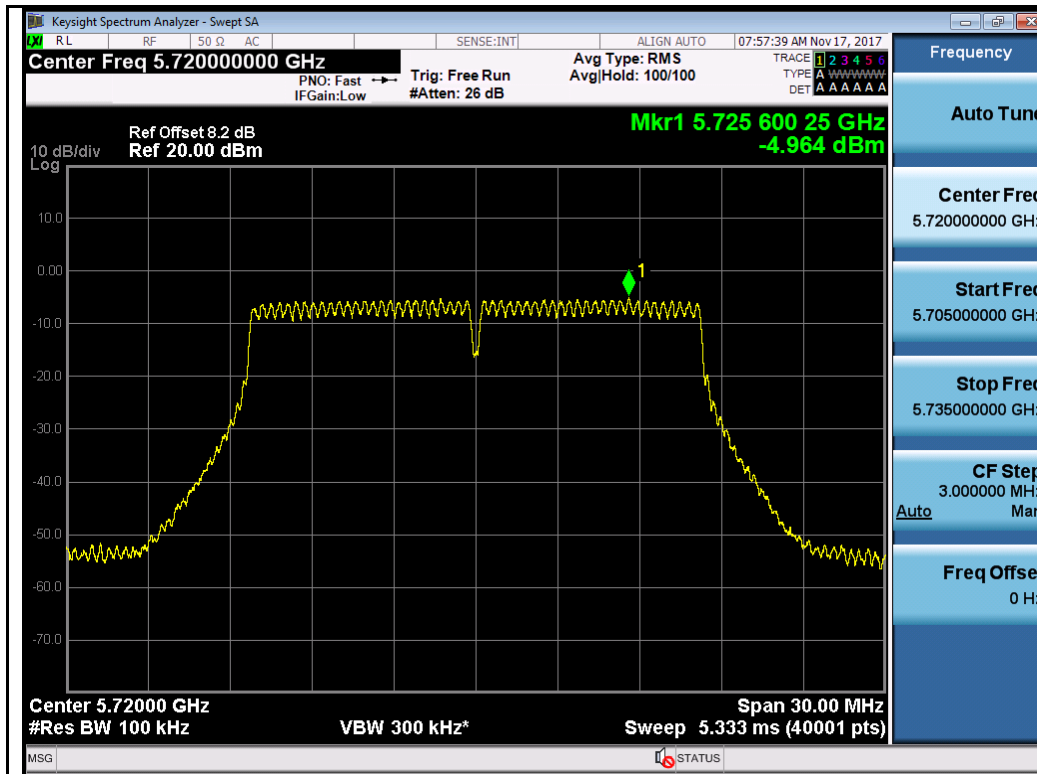

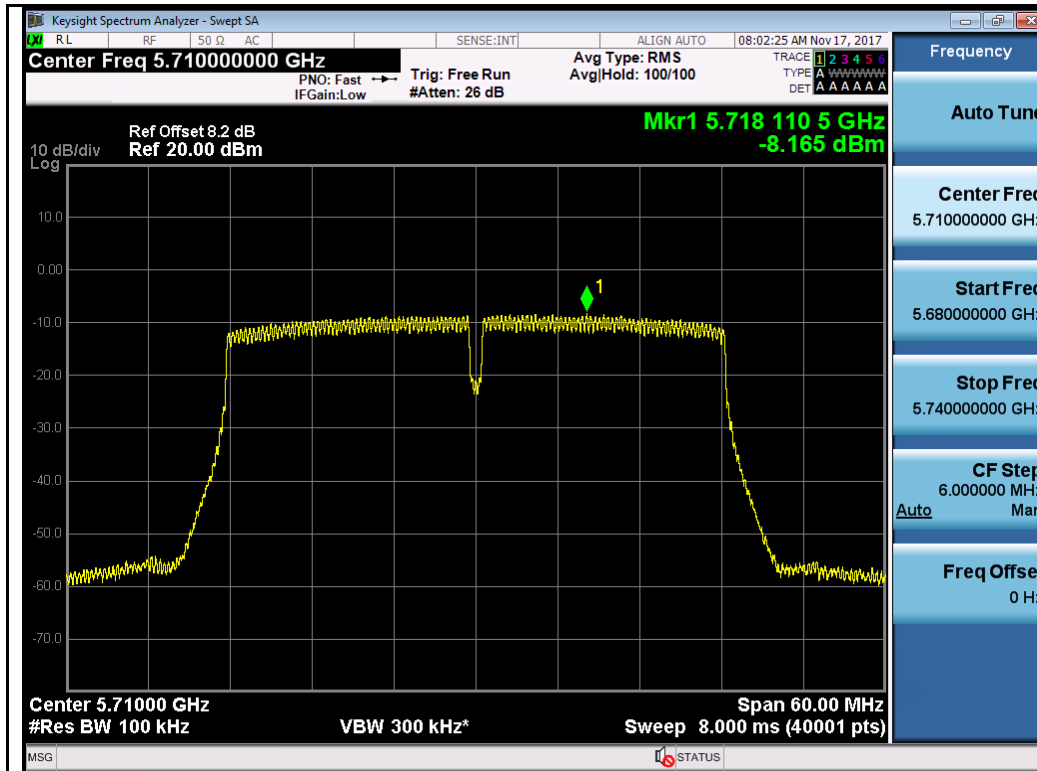


802.11n-HT40 5710M

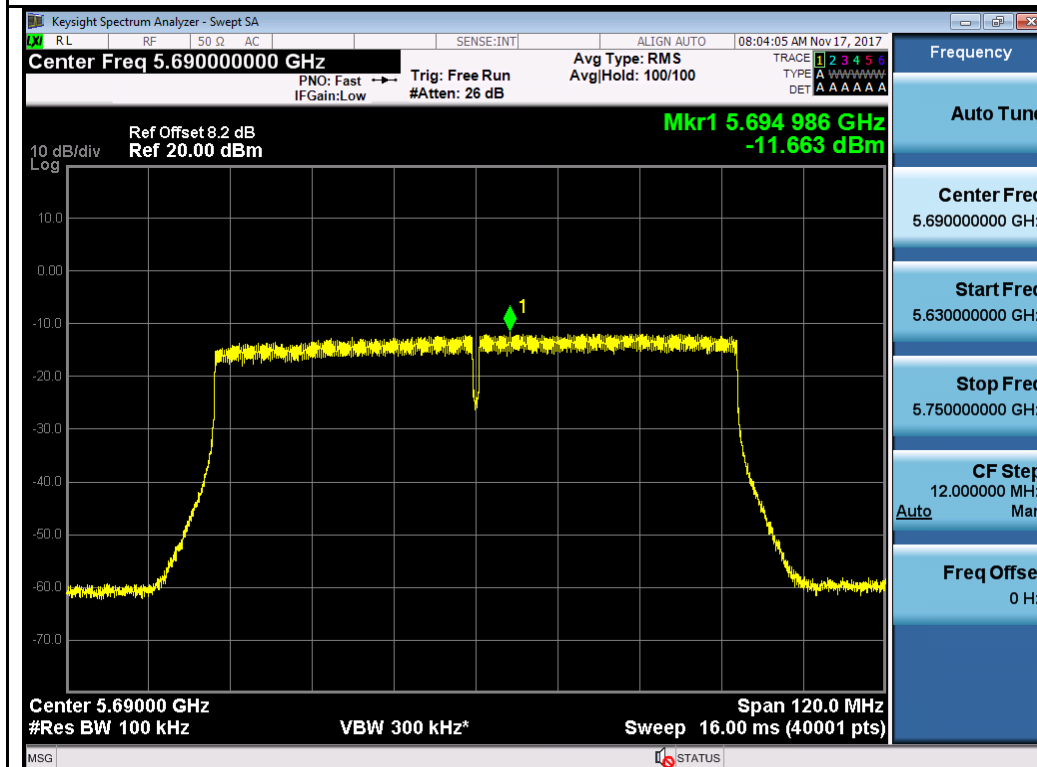


802.11ac-VHT80 5690M



Chain 1:

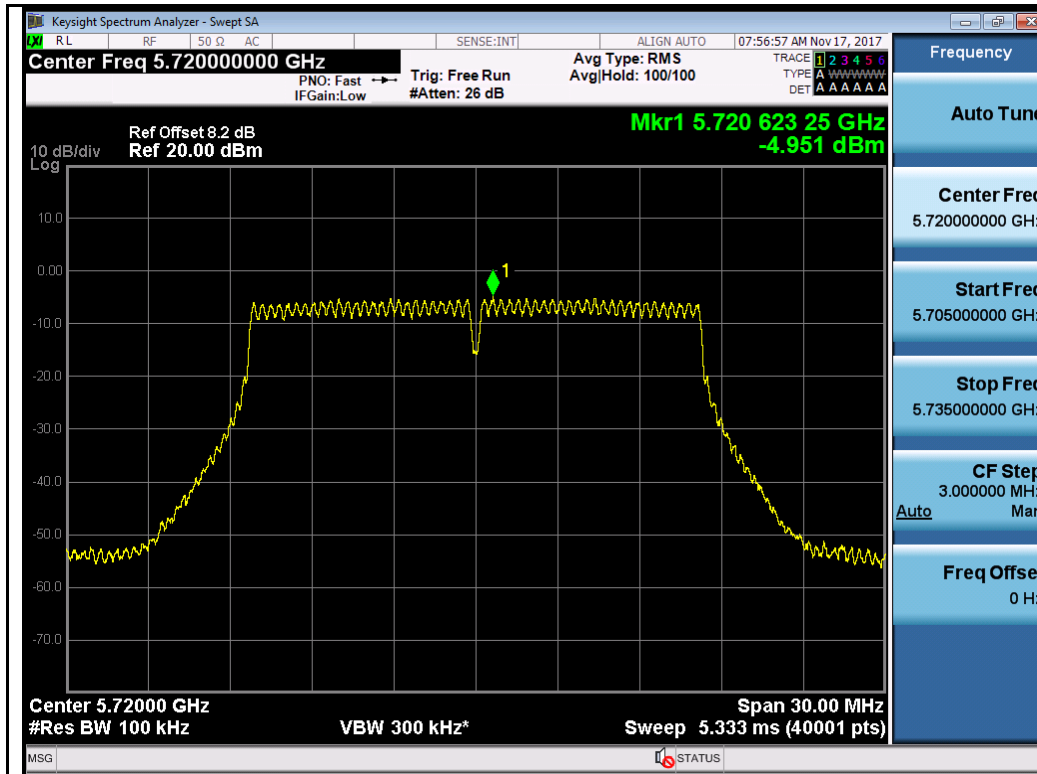

802.11a-5720M

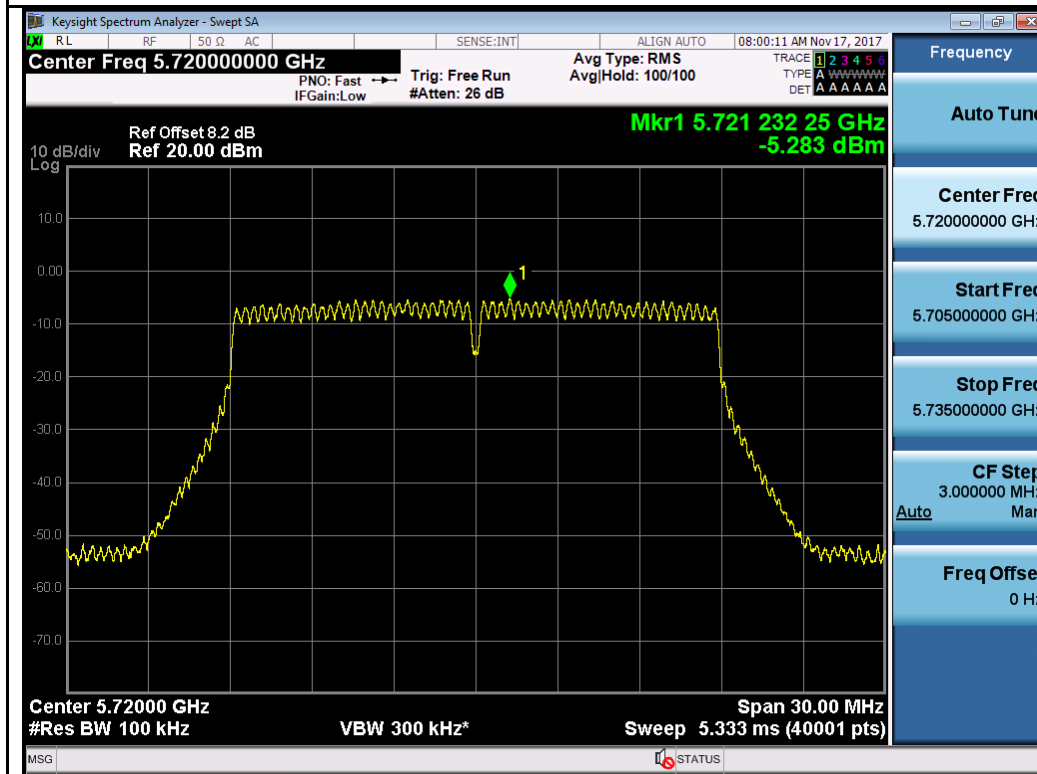


802.11n-HT20 5720M

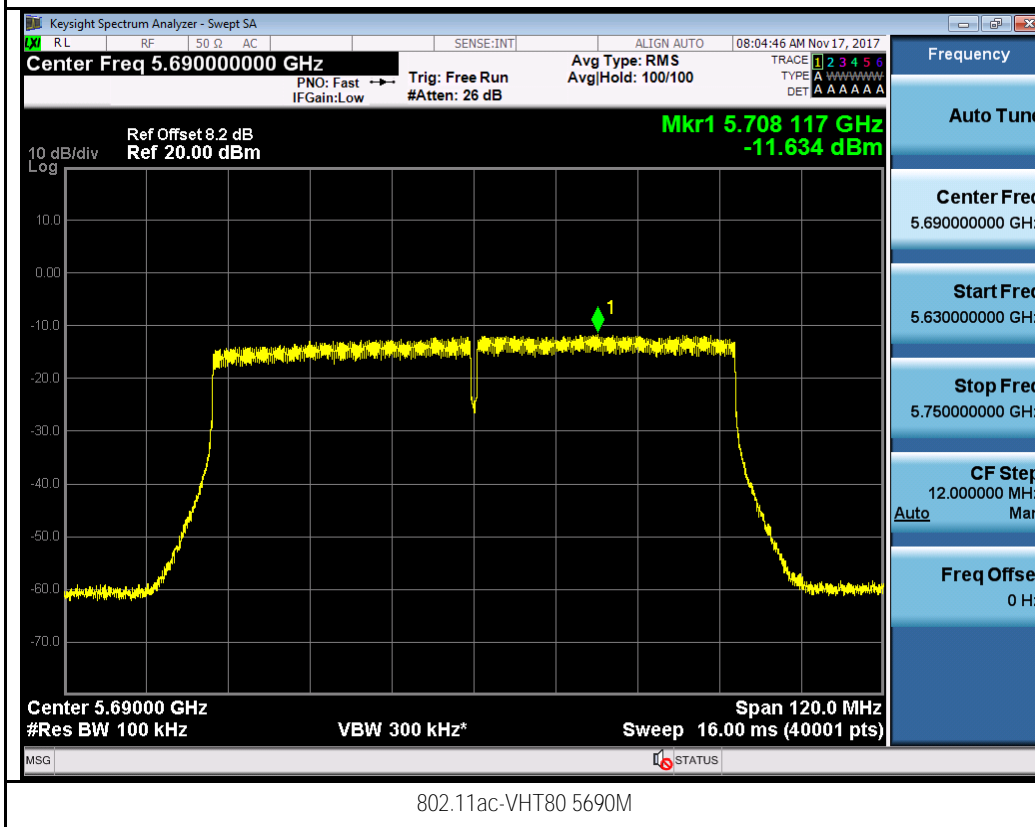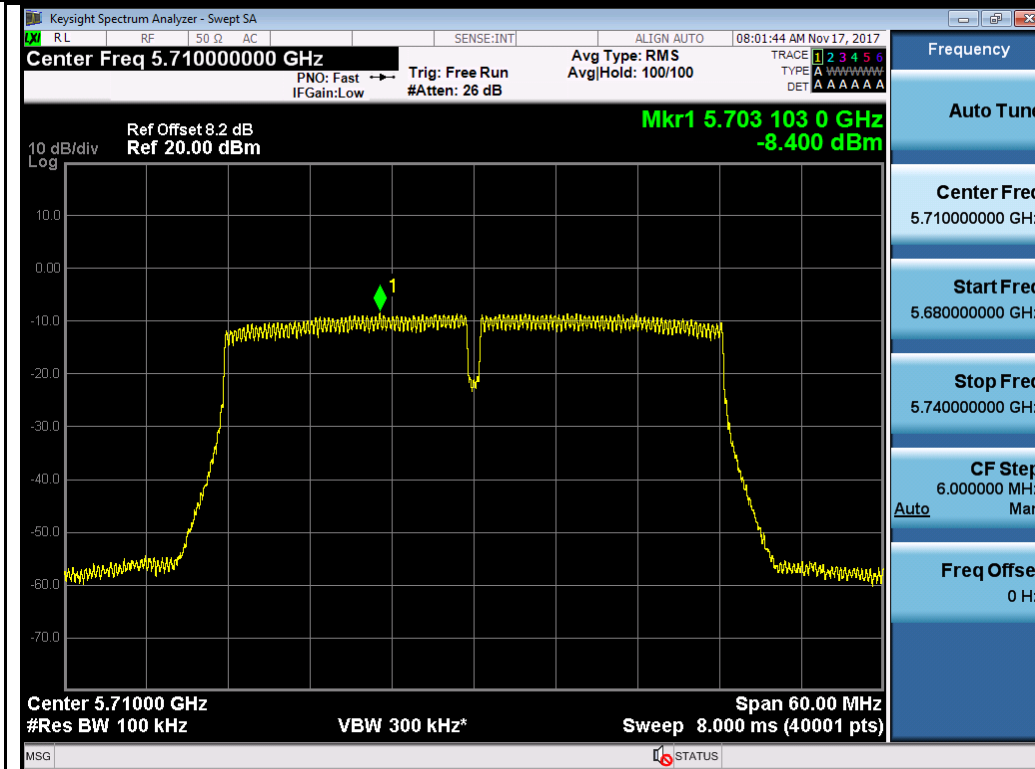

10.6 Band Edge Measurement

Requirement(s):


Spec	Item	Requirement	Applicable
47CFR§ 15.407(b)(2), 15.407(b)(6)	(1)	For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.	<input type="checkbox"/>
	(2)	For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band.	<input checked="" type="checkbox"/>
	(3)	For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.	<input checked="" type="checkbox"/>
	(4)	For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz.	<input type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>		
Procedure	<p>789033 D02 General UNII Test Procedures New Rules v01, II.F. Method SA-1</p> <p><u>Band Edge measurement:</u></p> <ul style="list-style-type: none"> - For average emissions measurements, follow the procedures described in section II.G.6., "Procedures for Average Unwanted Emissions Measurements above 1000 MHz", except for the following changes: - Set RBW=100kHz - Set VBW=300kHz - Perform a band-power integration across the 1 MHz bandwidth in which the band-edge emission level is to be measured. 		
Remark	Antenna gain was added to the offset.		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		



Test Data Yes (See below) N/A



Test Plot Yes (See below) N/A


Test was done by Cipher at RF test site.

T310N
Test Plots for W53:
Chain 0:

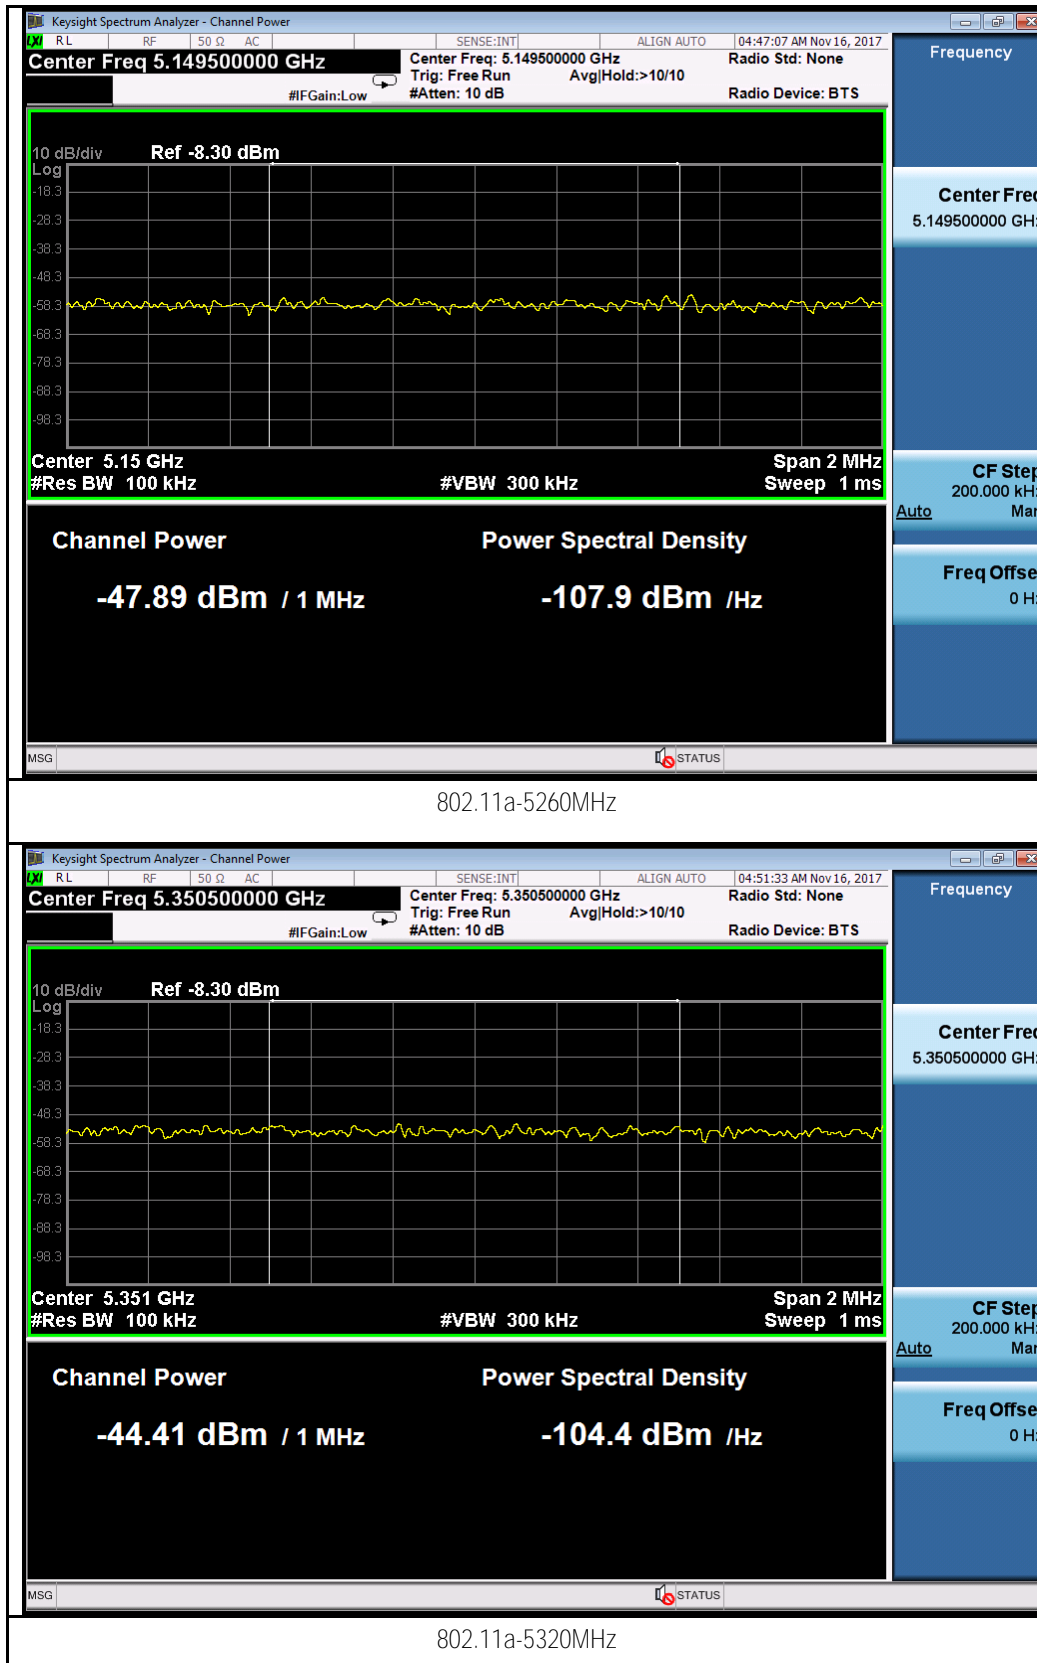


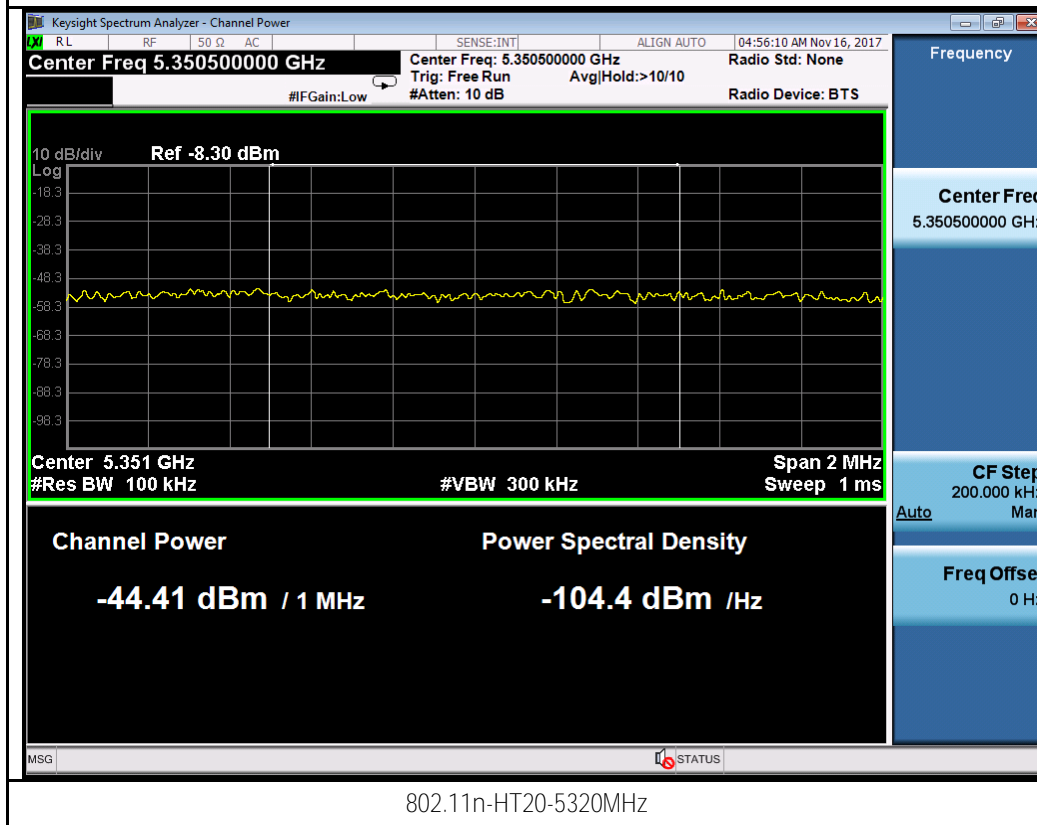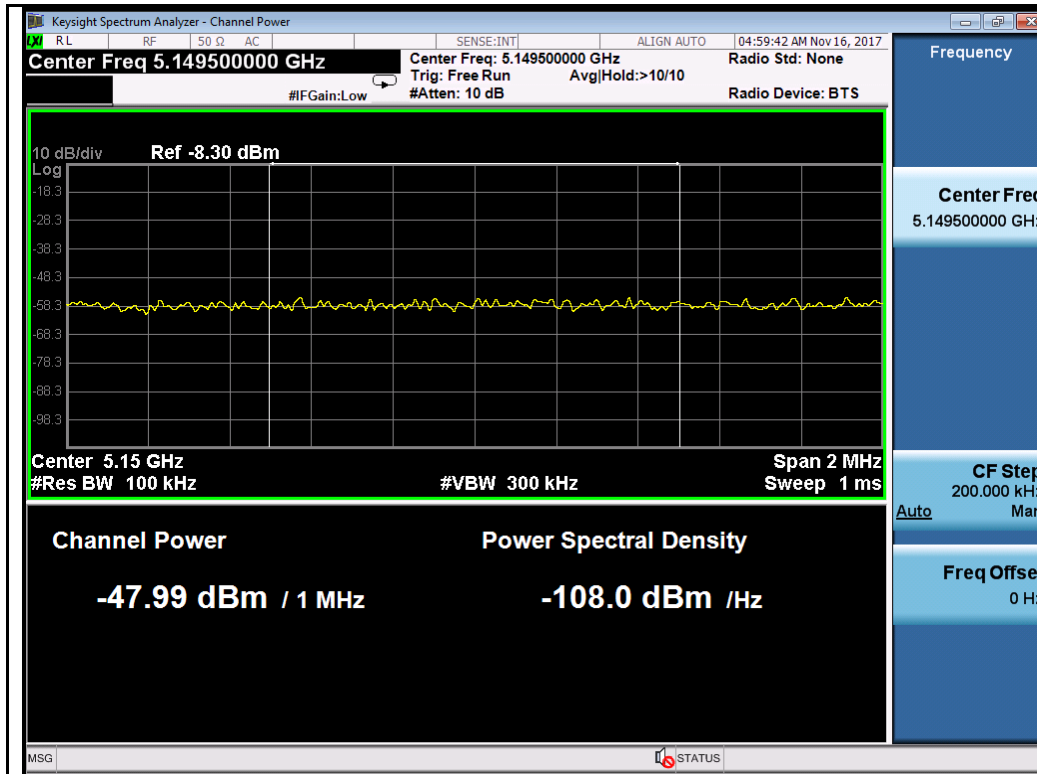


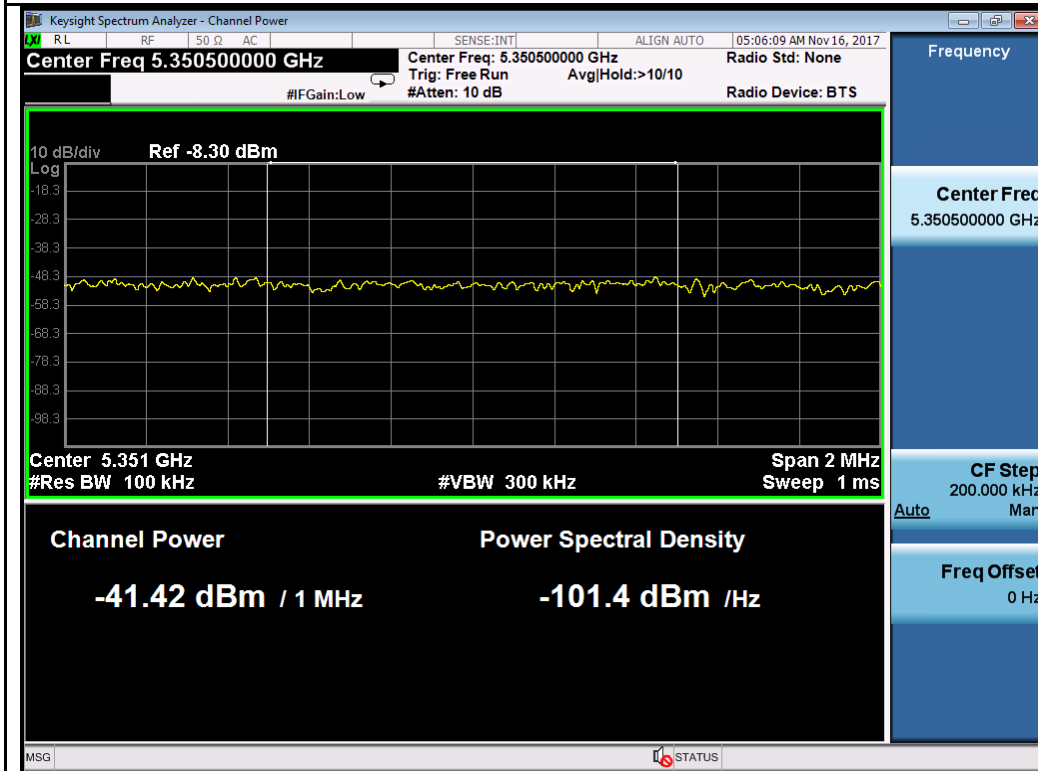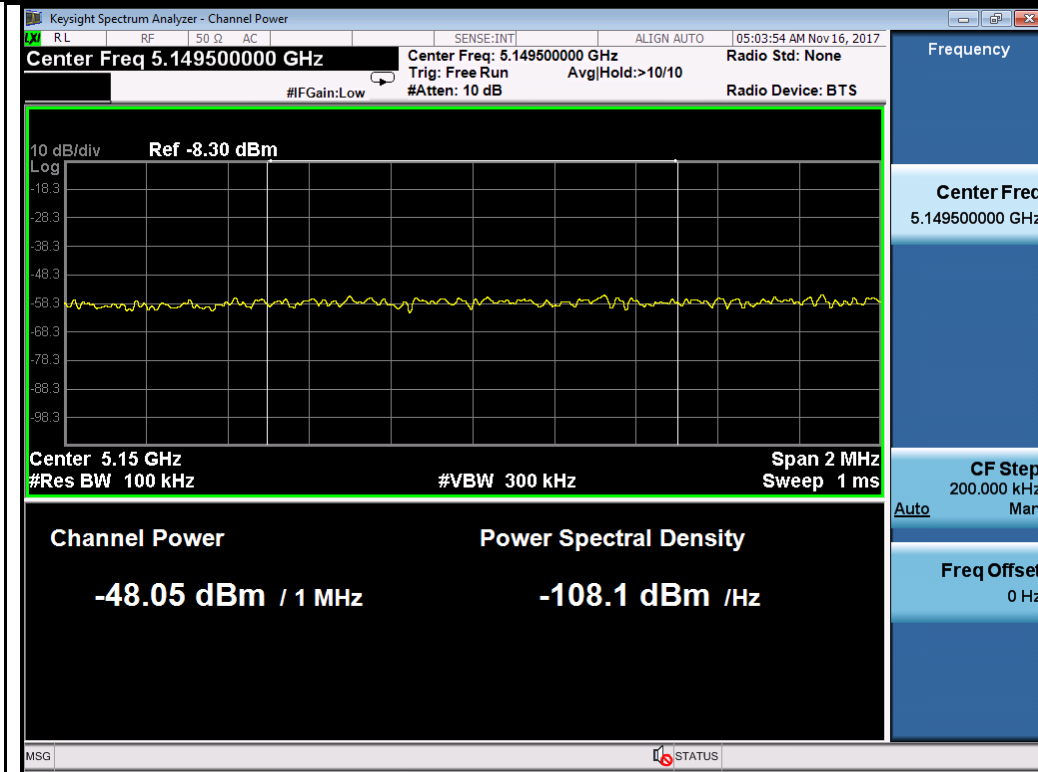

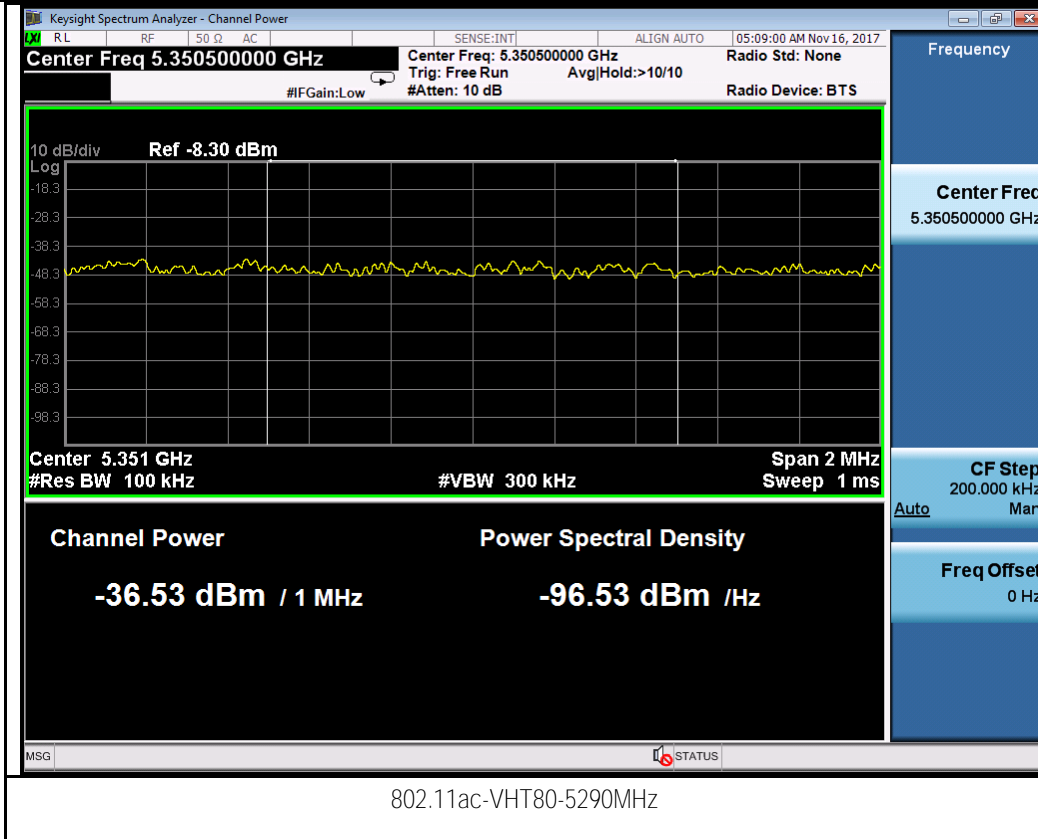


Chain 1:

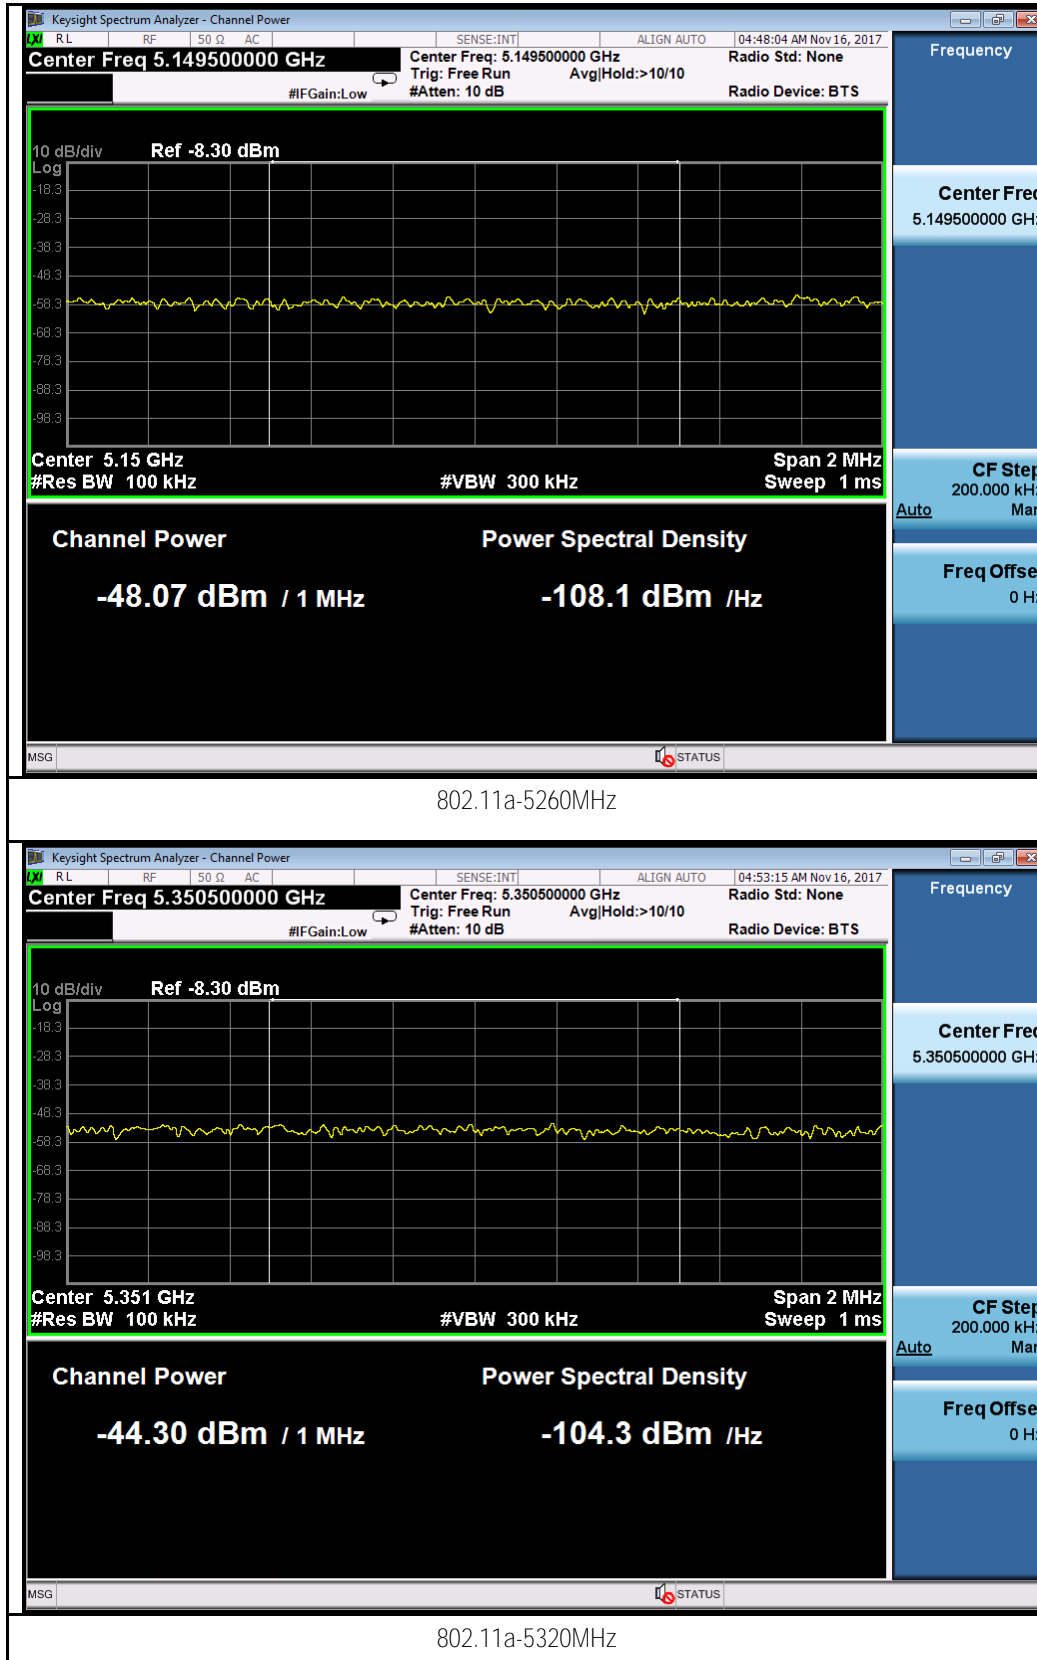


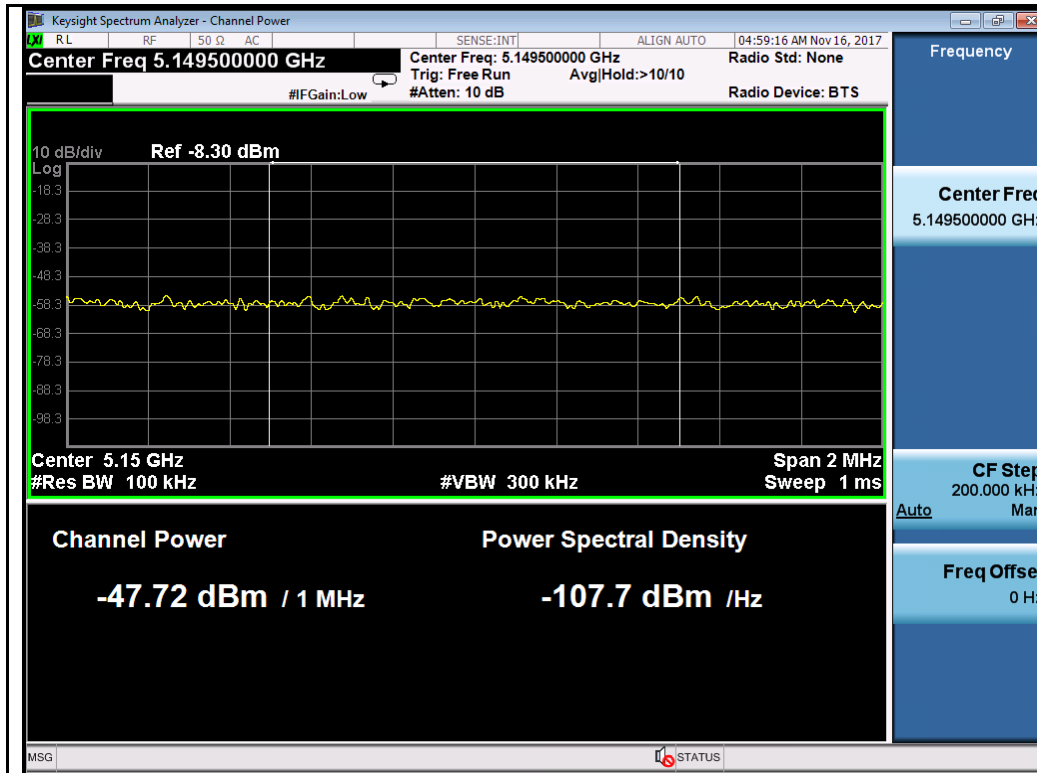


802.11n-HT20-5260MHz

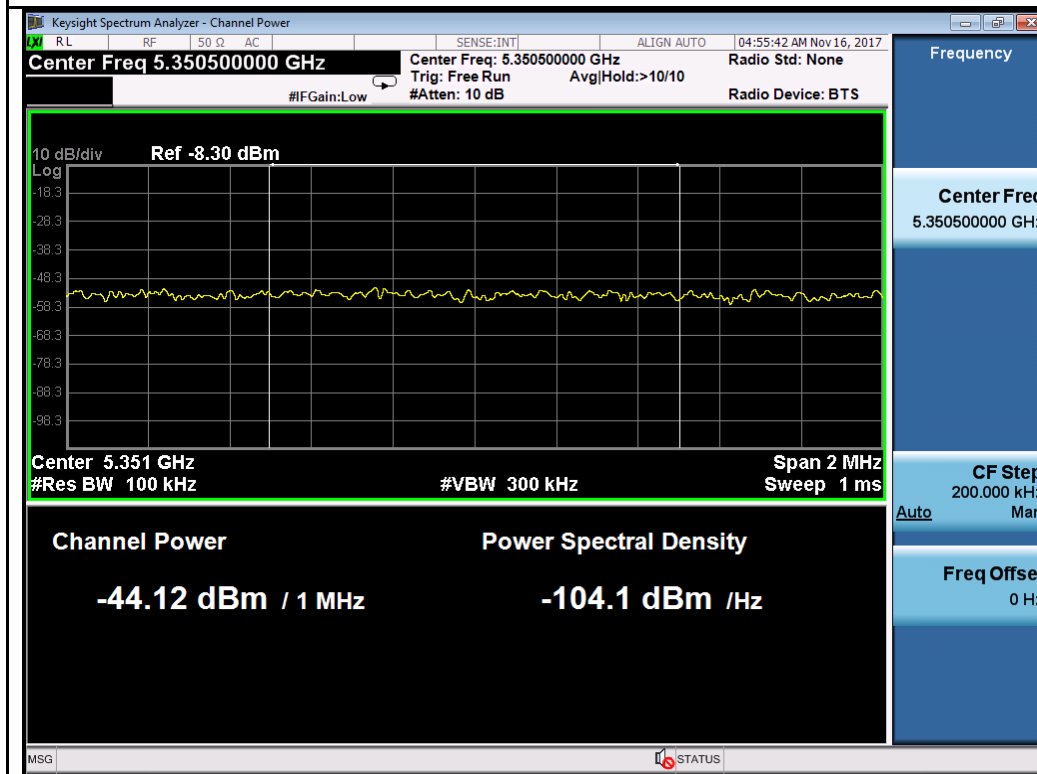


802.11n-HT20-5320MHz

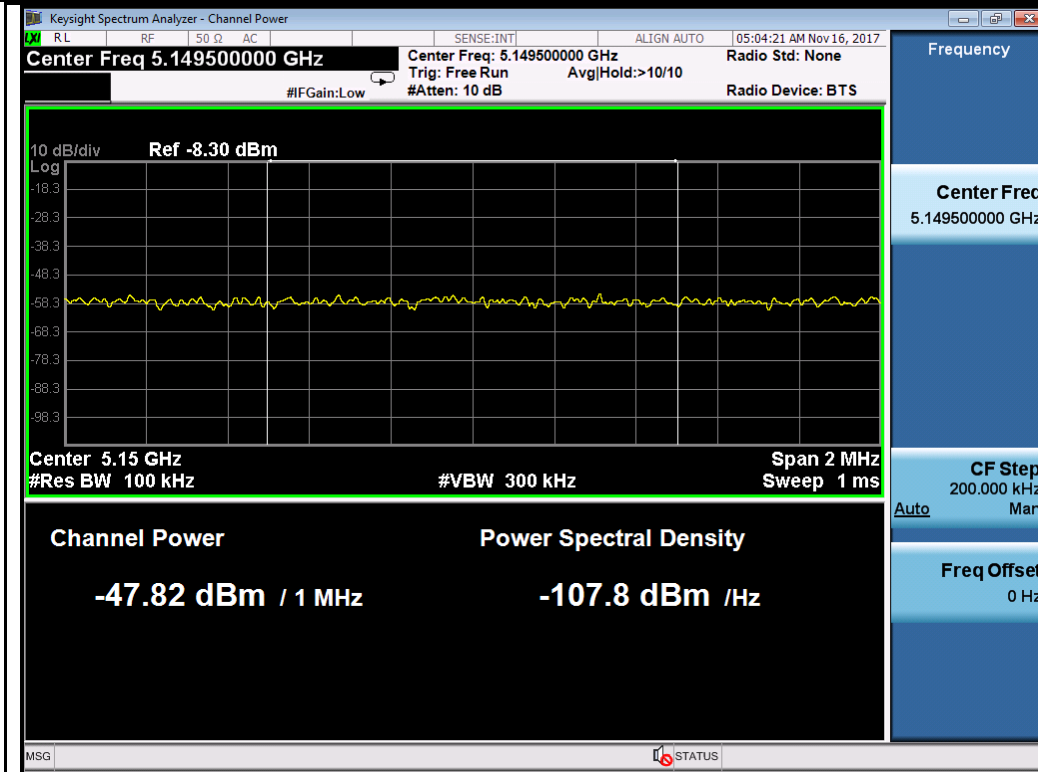


802.11n-HT40-5270MHz

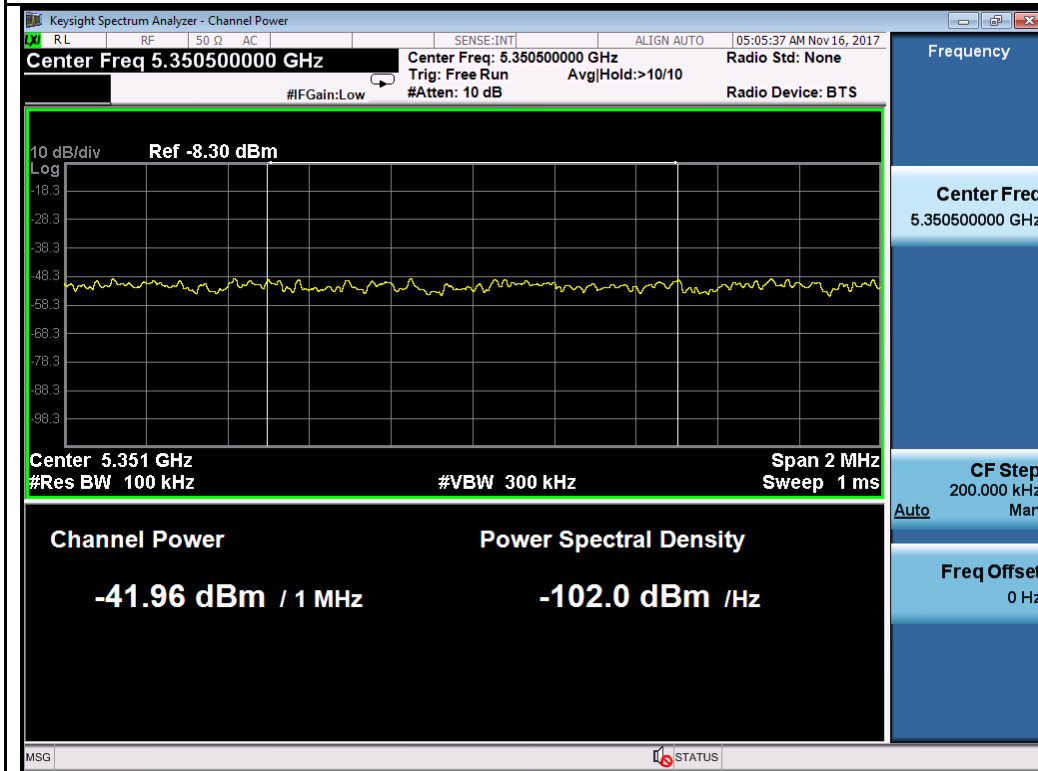


802.11n-HT40-5310MHz

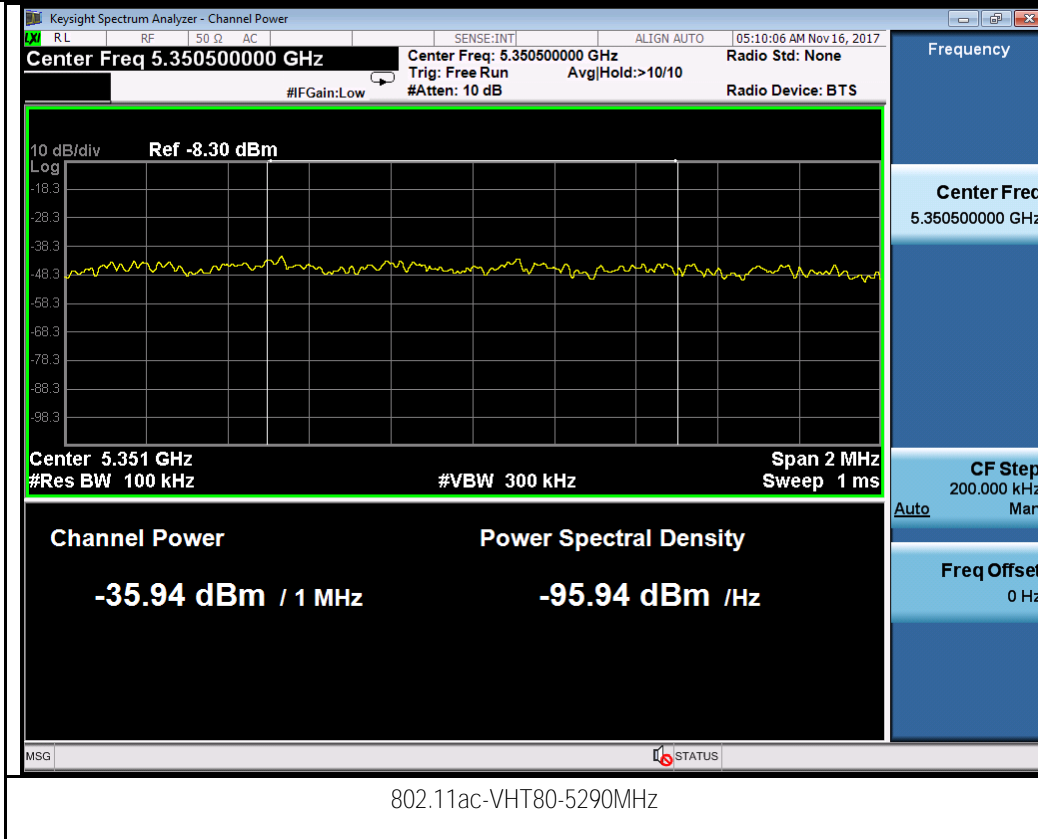


Test Plots for W56:
Chain 0:

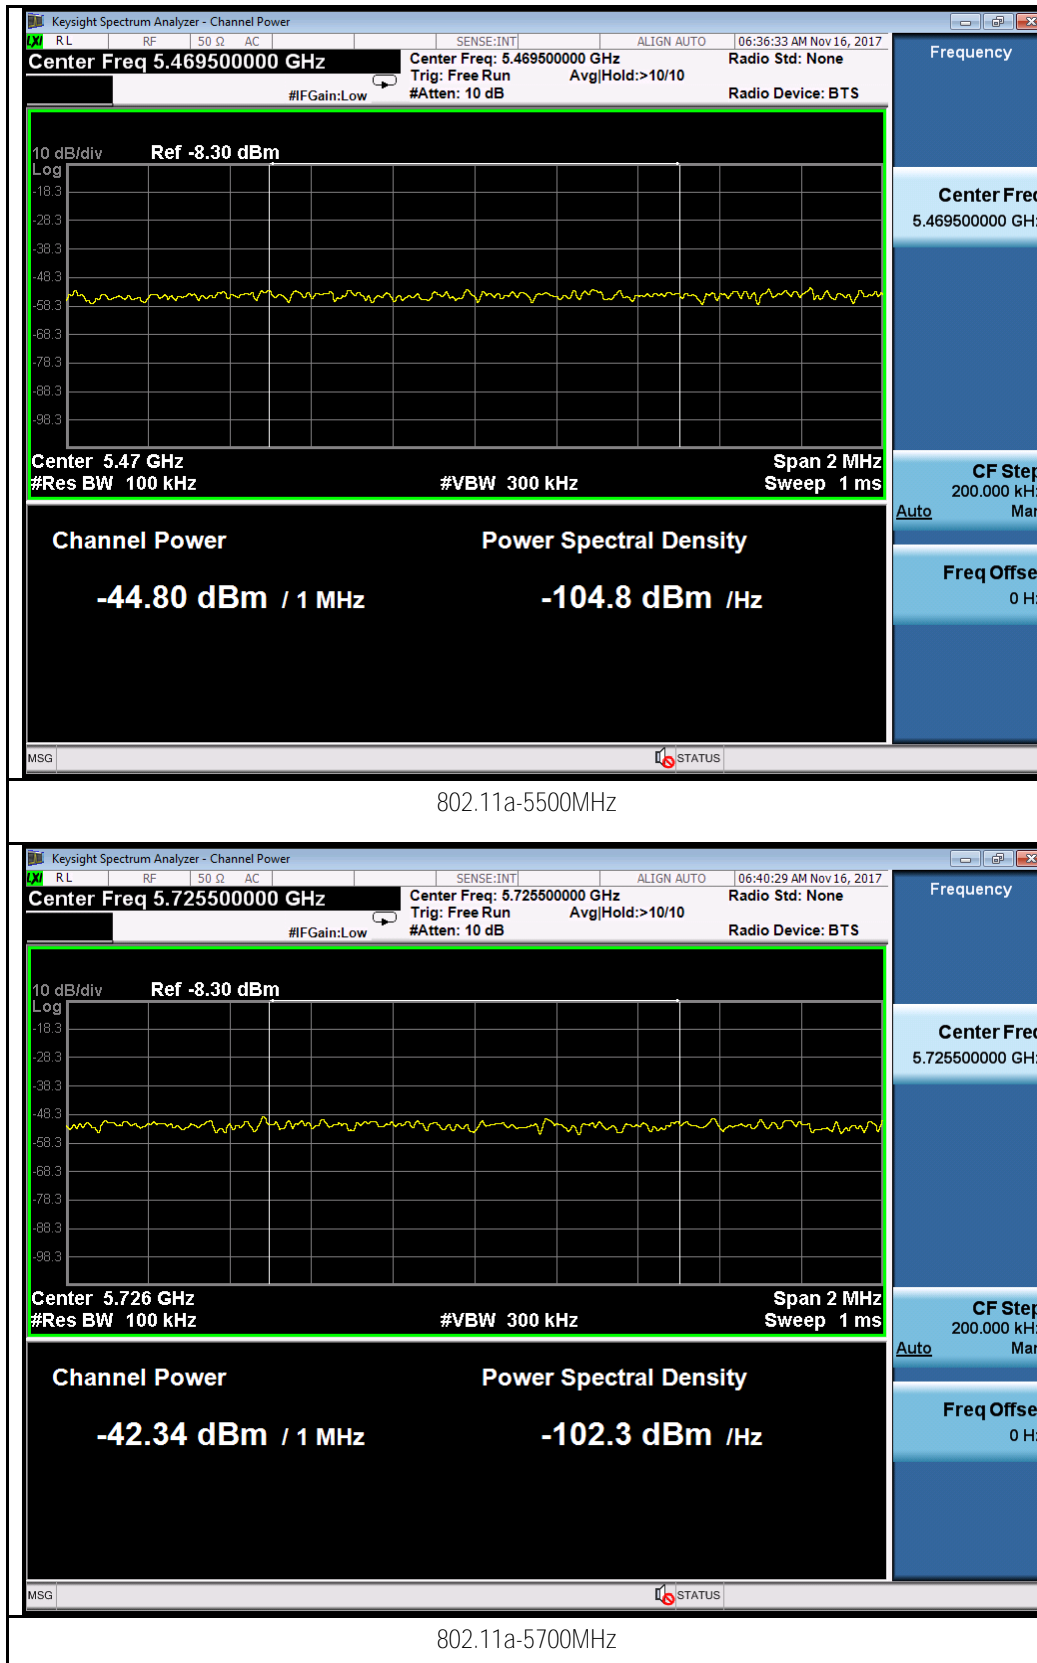


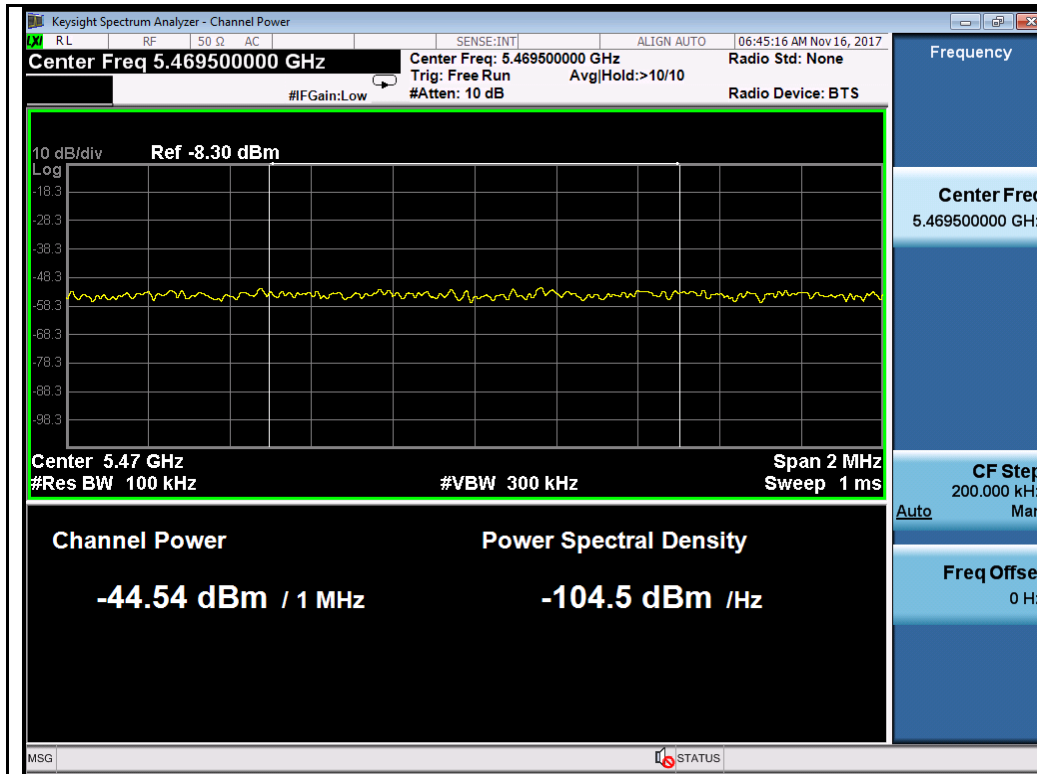


802.11n-HT20-5500MHz

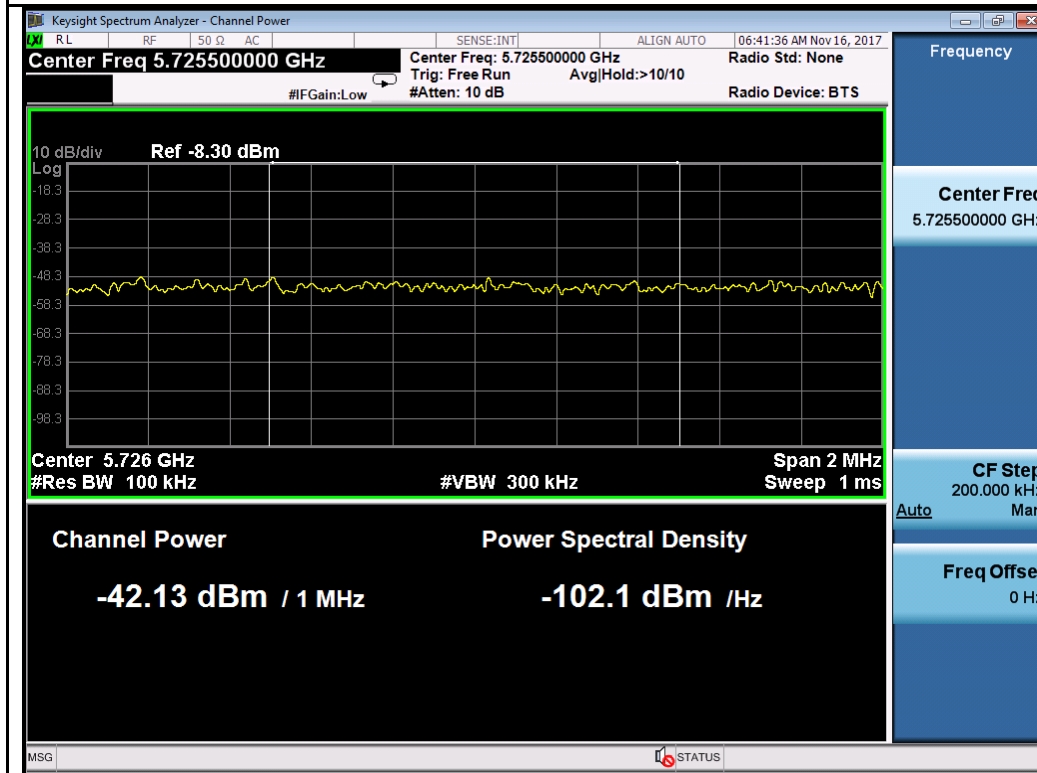


802.11n-HT20-5700MHz

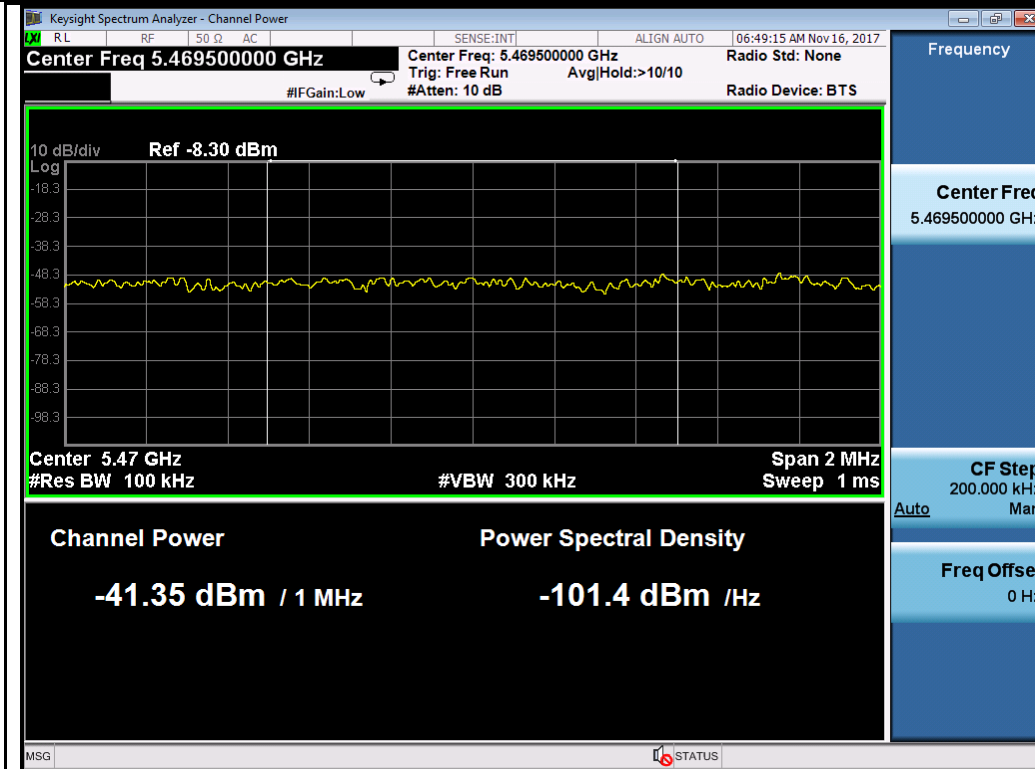


802.11n-HT40-5510MHz

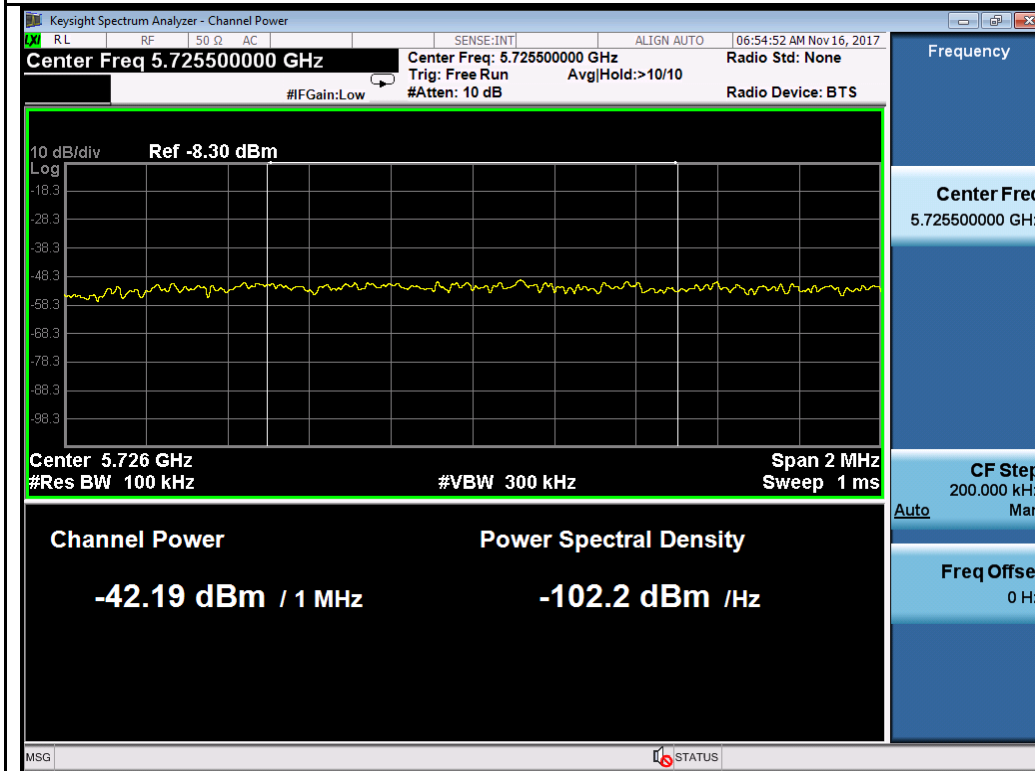

802.11n-HT40-5670MHz

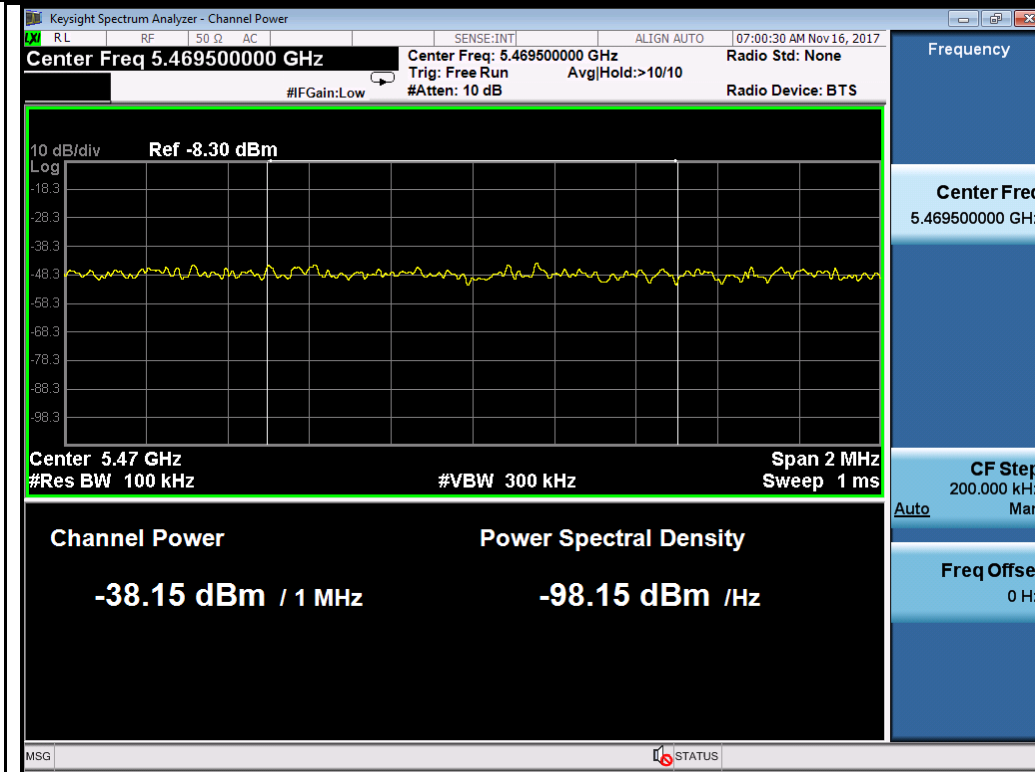


802.11ac-VHT80-5530MHz

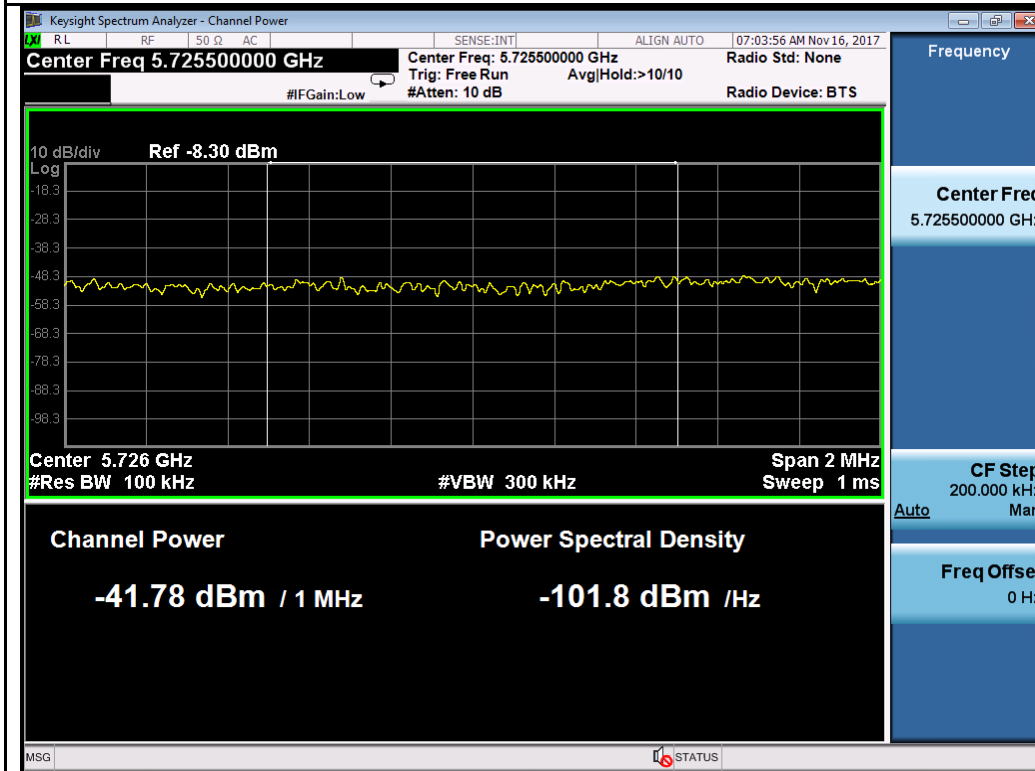


802.11ac-VHT80-5610MHz

Chain 1:




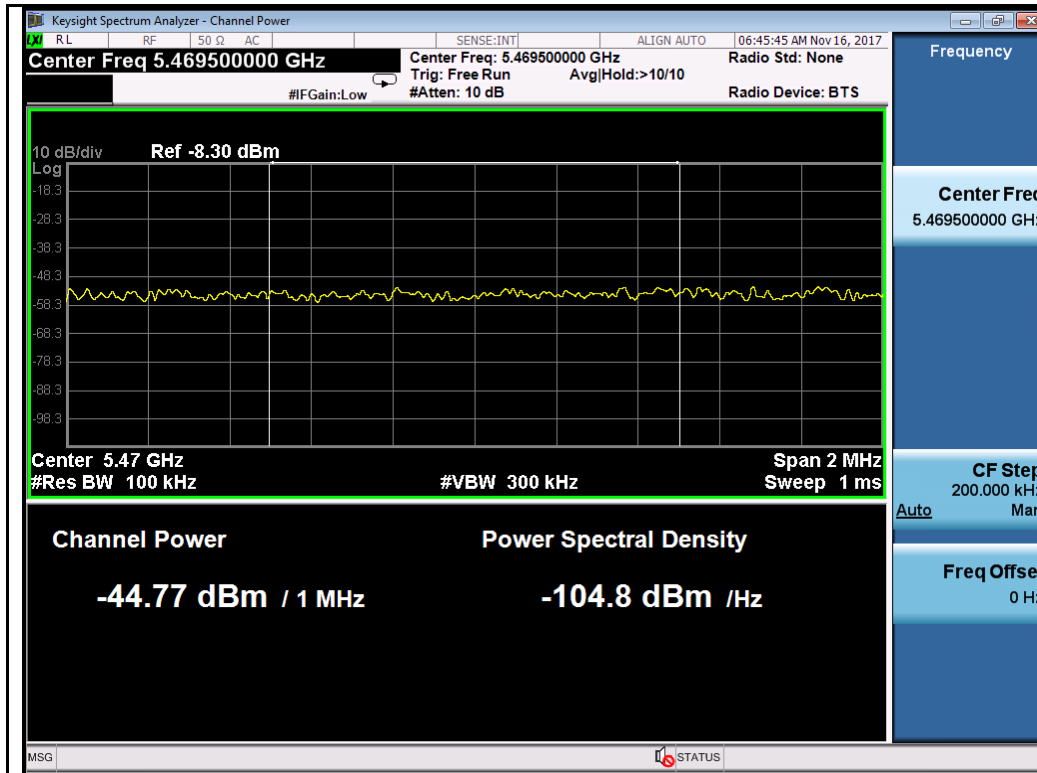


802.11n-HT20-5500MHz

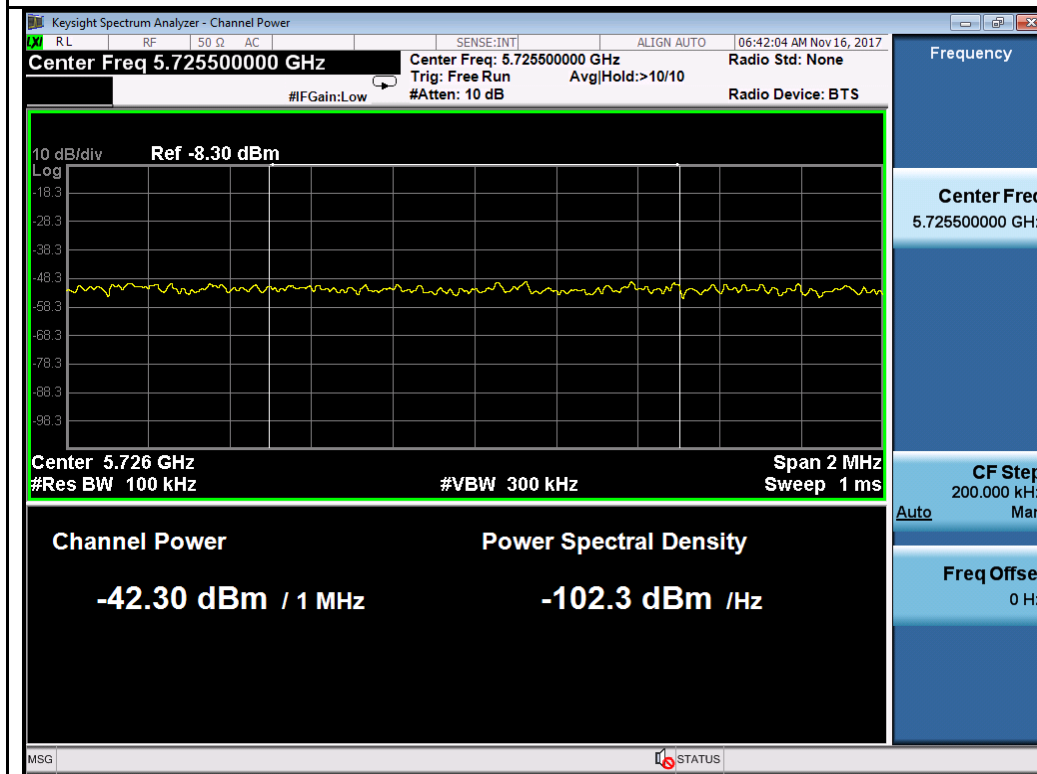


802.11n-HT20-5700MHz

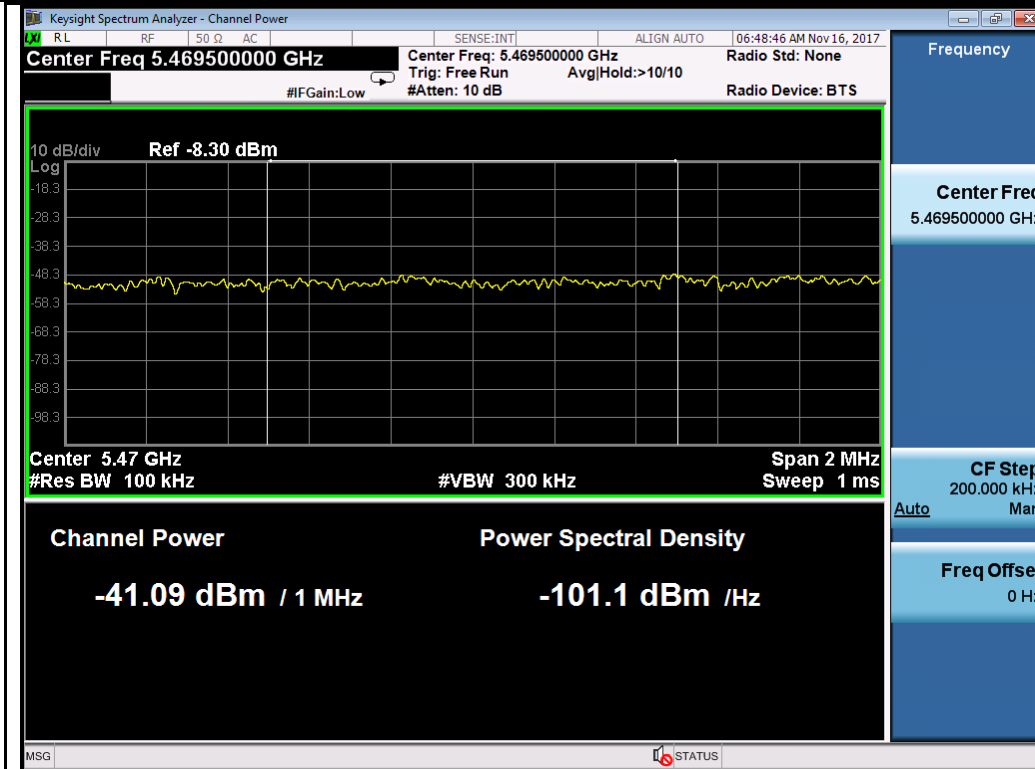


802.11n-HT40-5510MHz

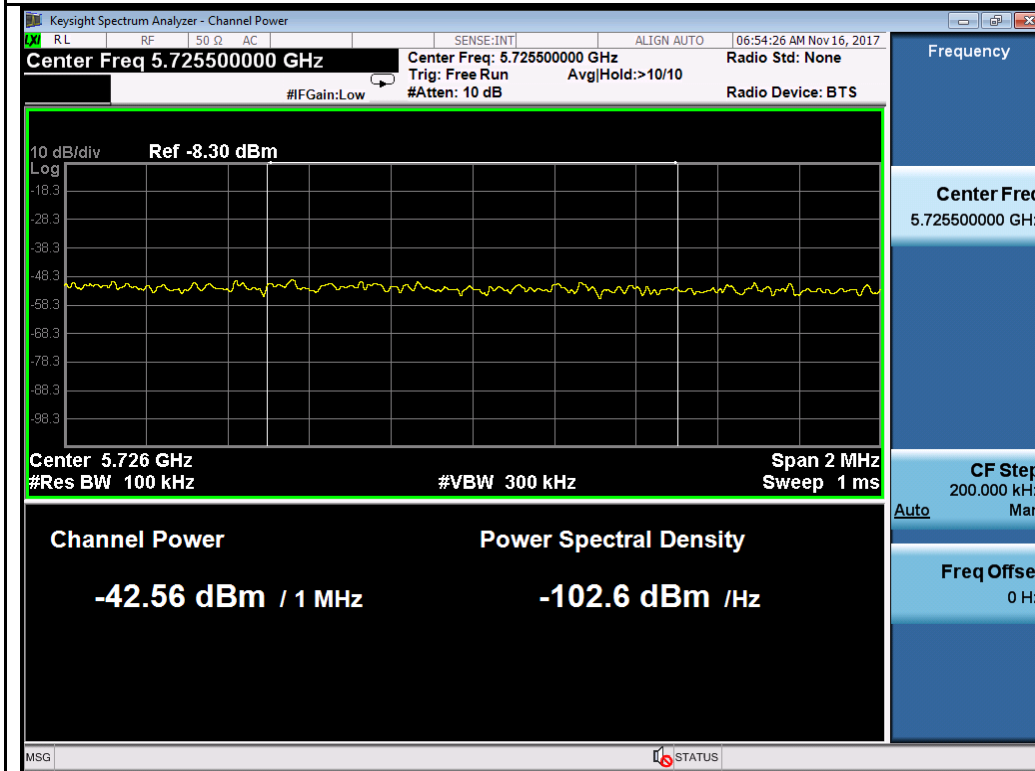

802.11n-HT40-5670MHz

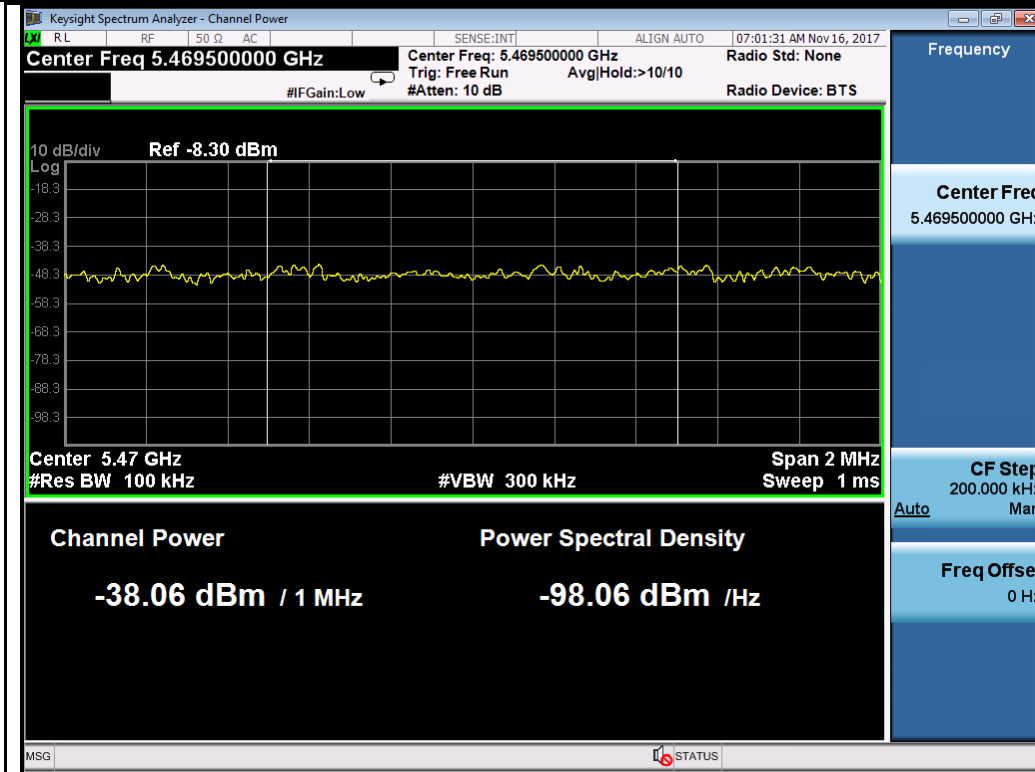



802.11ac-VHT80-5530MHz

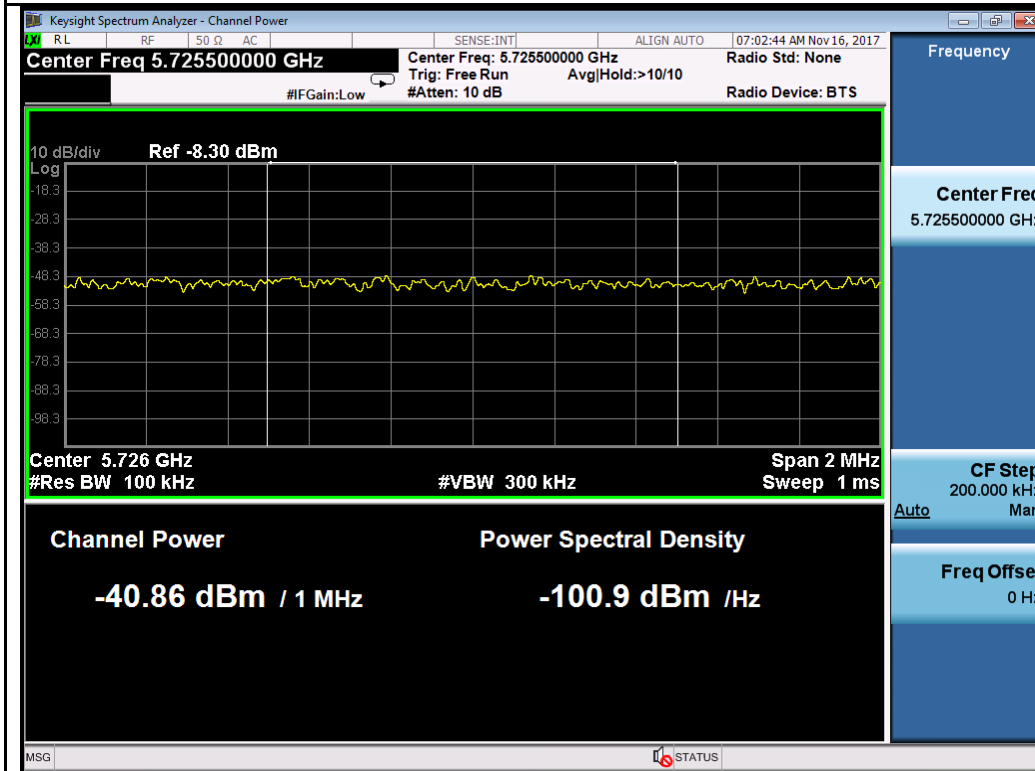


802.11ac-VHT80-5610MHz

T310S
Test Plots for W53:
Chain 0:

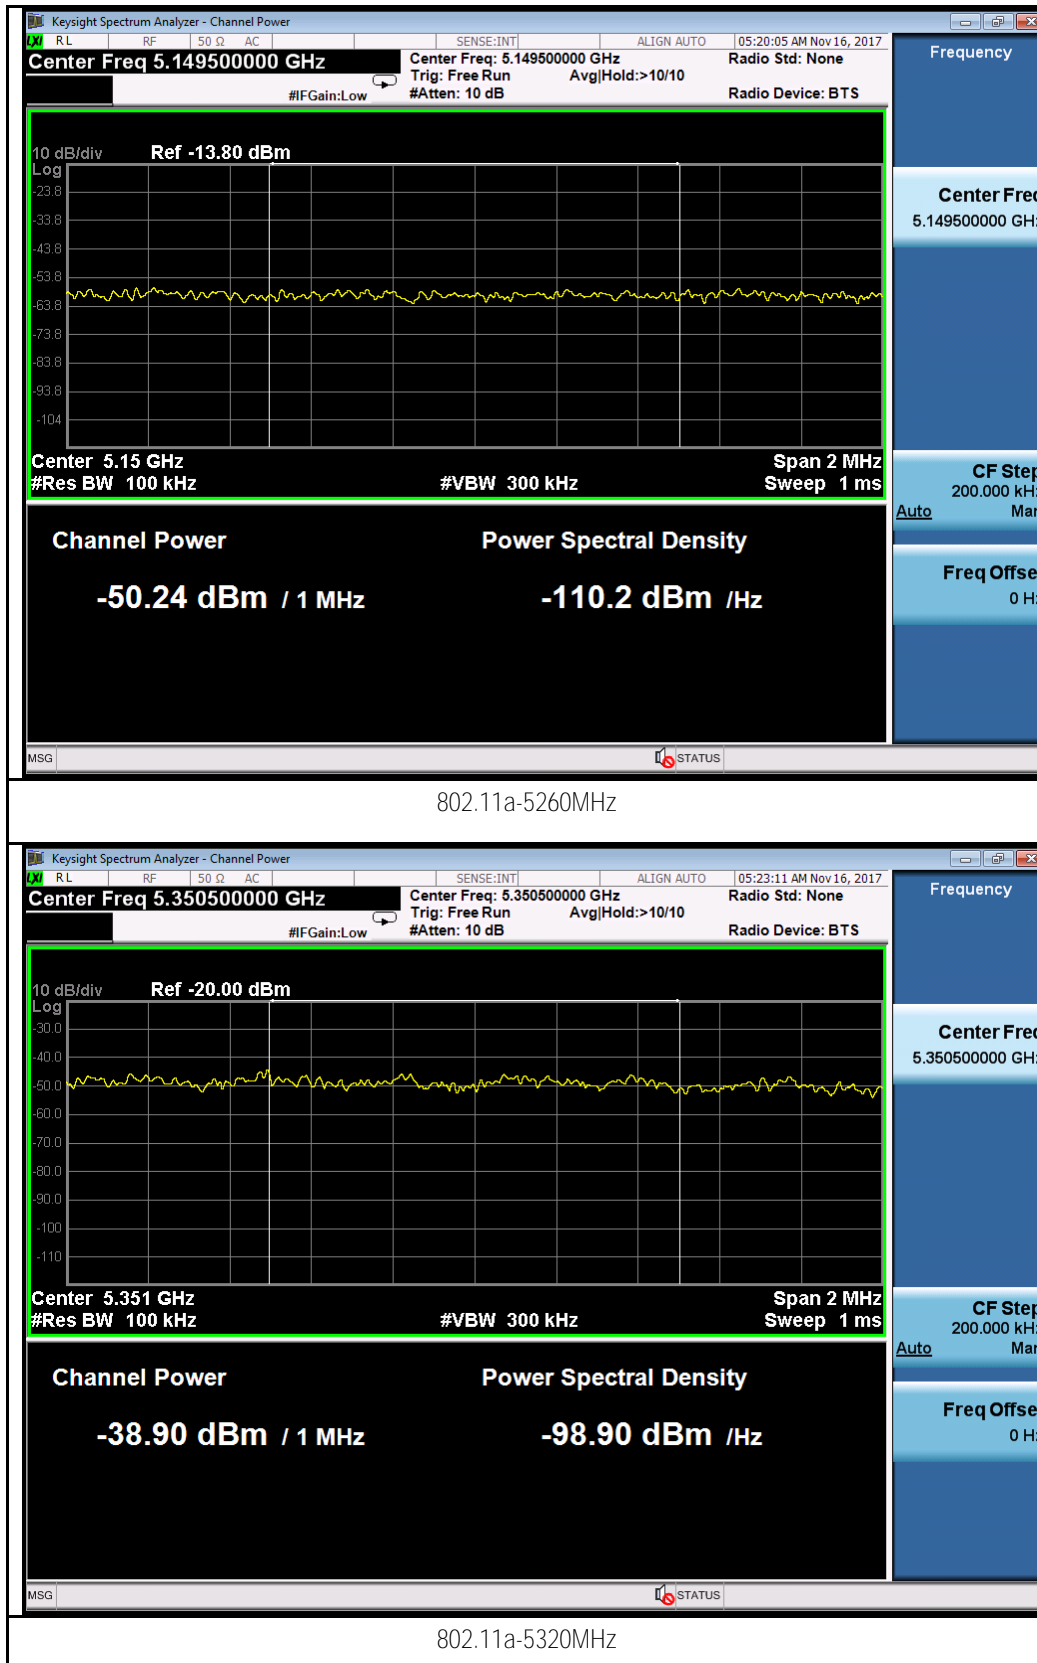


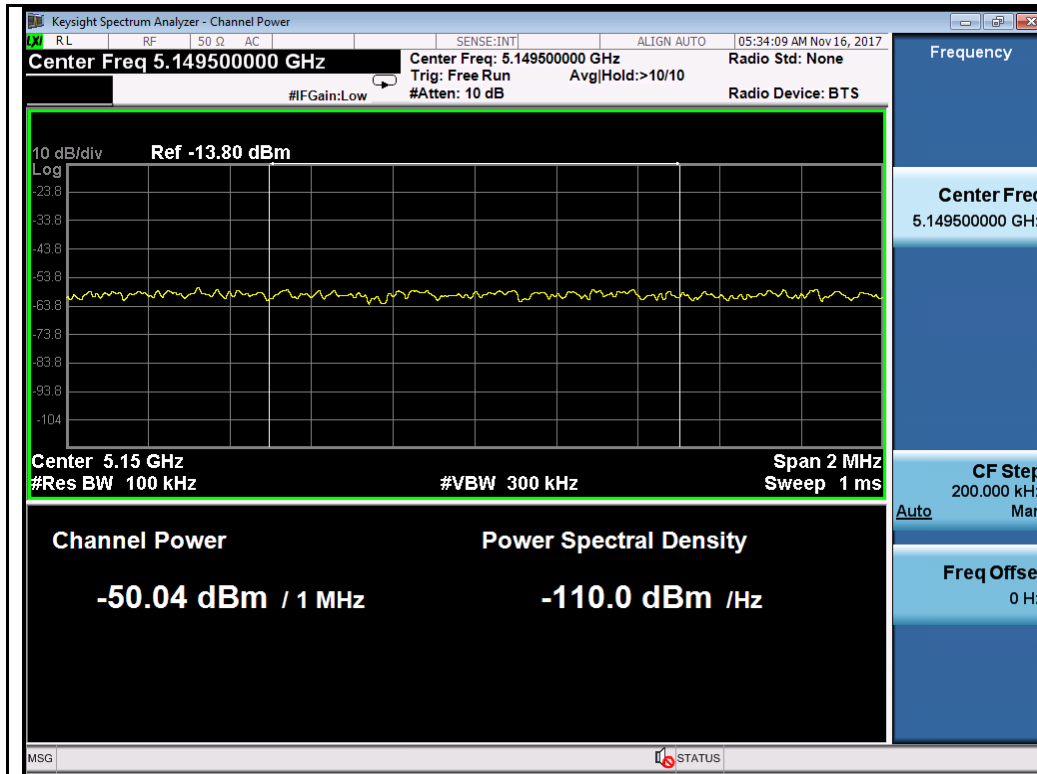


802.11n-HT20-5260MHz

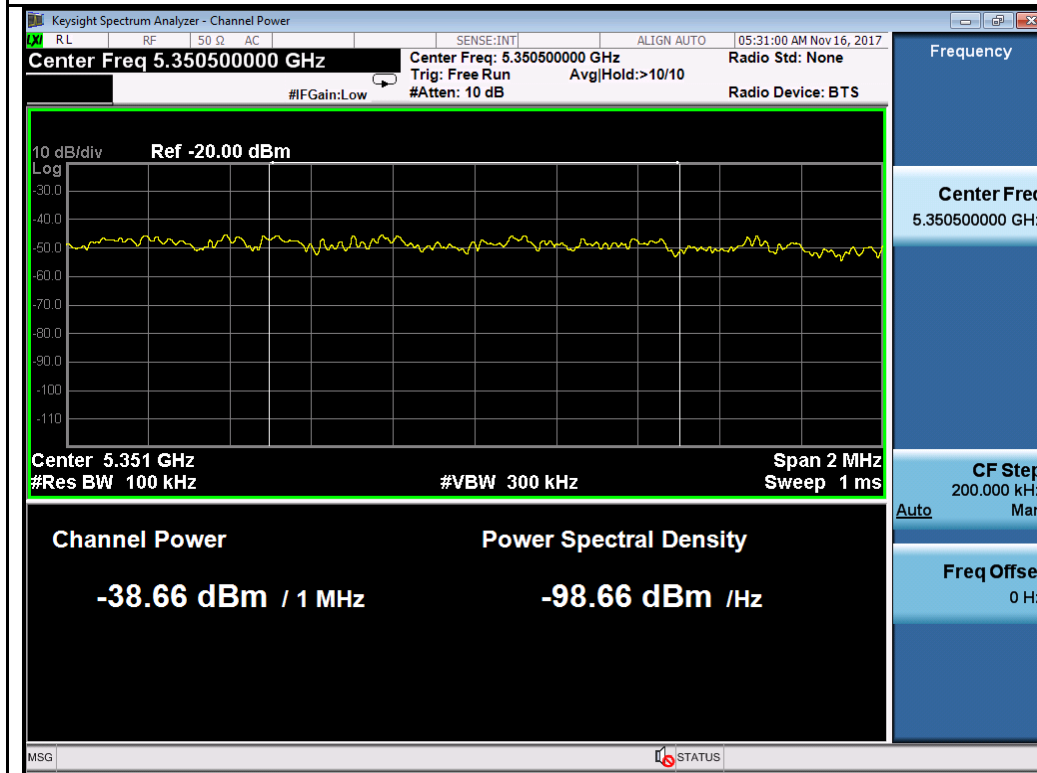

802.11n-HT20-5320MHz

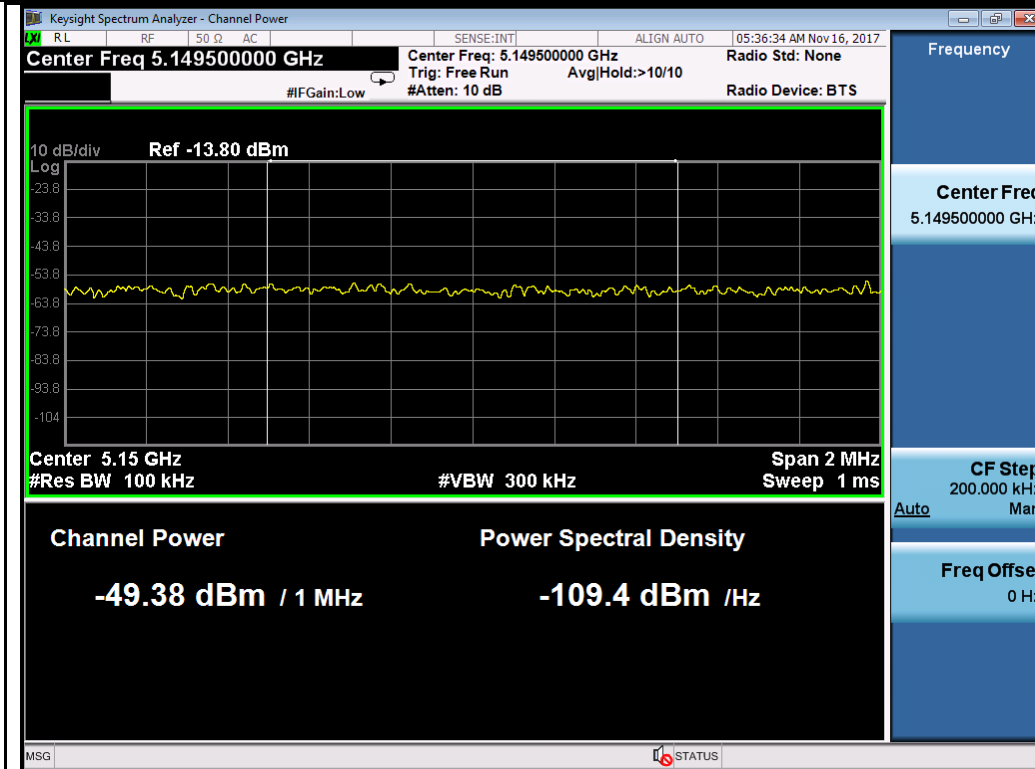

802.11n-HT40-5270MHz

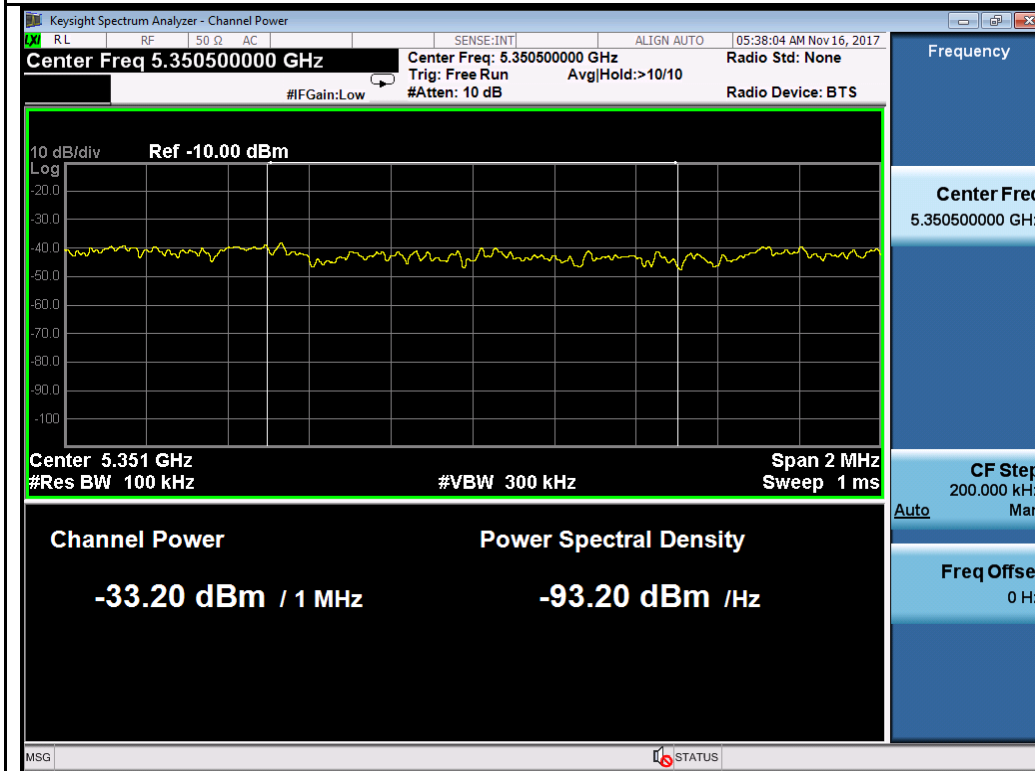

802.11n-HT40-5310MHz

