

ZoneFlex T710 Access Point Installation Addendum:

Application: Outdoor operation in the 5150 – 5250 MHz band. Country: United States of America


When the freuqency band 5150 – 5250 MHz is used outdoors in the U.S.A, the FCC mandates that it is necessary to keep the energy radiated above 30 degrees from the horizon below 21 dBm EIRP. This can be obtained using the following guidance.

When device installed outdoors level to the horizon, (i.e. - antenna point towards down towards the earth), the device operates in compliance with FCC rules without any adjustment of output power.

Maximum EIRP in 5150 – 5250 MHz band = 24 dBm + Antenna Gain Maximum EIRP in 30 degree from Horizontal = 24 dBm + -4 dBi = 20 dBm

When the device is installed outdoors at an angle to the horizon, power must be reduced to insure the energy radiated above 30 degrees from the horizon remains under 21 dBm EIRP.

Elevation Pattern:

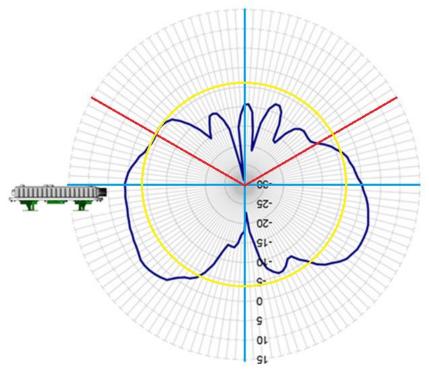

Degree	Output
Above	Power
Horizon (A)	Reduction
A <=12	0
12 < A <15	0.5
15 < A < 30	3
30 < A < 45	3
A > 45	6dB

Ruckus Wireless, Inc.		
350 West Java Drive	Telephone	(650) 265-4200
Sunnyvale, CA 94089 USA	Fax	(408) 738-2065

Title of Document • Page 2



ZoneFlex T710s Access Point Installation Addendum:

Application: Outdoor operation in the 5150 – 5250 MHz band. Country: United States of America


When the frequency band 5150 – 5250 MHz is used outdoors in the U.S.A, the FCC mandates that it is necessary to keep the energy radiated above 30 degrees from the horizon below 21 dBm EIRP. This can be obtained using the following guidance.

When device installed outdoors level to the horizon, (i.e. - antenna points horizontal to the earth), the device operates in compliance with FCC rules without any adjustment of output power.

Maximum EIRP in 5150 – 5250 MHz band = 21 dBm + Antenna Gain Maximum EIRP in 30 degree from Horizontal = 21 dBm + -5 dBi = 16 dBm EIRP

When the device is installed outdoors at an angle with the radome pointed above the horizon, the maximum up-tilt angle is 16 degrees without a reduction in output power. Please see the table below for the required output power reduction if the device is installed at an up-tilt angle greater than 16 degrees.

Elevation Pattern:

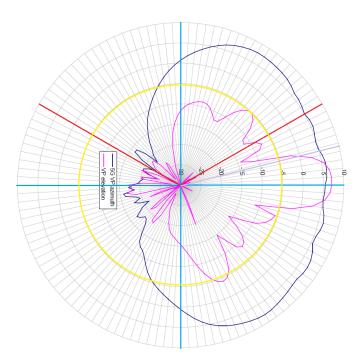

Degree	Output
Above	Power
Horizon (A)	Reduction
A <16	0 dB
A = 17	2 dB
A = 18	3 dB
A = 19	4 dB
A = 20	4 dB
A = 21	6 dB
A = 22	6 dB
A > 23	7 dB

Ruckus Wireless, Inc. 350 West Java Drive Sunnyvale, CA 94089 USA

Telephone (650) 265-4200 Fax (408) 738-2065