



FCC TEST REPORT

REPORT NO.: RF991026E02
MODEL NO.: ZoneFlex 7025 Access Point
FCC ID: S9GZF7025
RECEIVED: Oct. 26, 2010
TESTED: Oct. 29 to Nov. 03, 2010
ISSUED: Nov. 29, 2010

APPLICANT: Ruckus Wireless, Inc.

ADDRESS: 880 West Maude Ave Suite 101 Sunnyvale, CA.
94085 USA

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.)
Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

This test report consists of 80 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF, NVLAP, NIST or any government agencies. The test results in the report only apply to the tested sample.



Table of Contents

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	6
3.	GENERAL INFORMATION	7
3.1	GENERAL DESCRIPTION OF EUT	7
3.2	DESCRIPTION OF TEST MODES	9
3.2.1	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	10
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	13
3.4	DESCRIPTION OF SUPPORT UNITS.....	14
3.5	CONFIGURATION OF SYSTEM UNDER TEST	15
4.	TEST TYPES AND RESULTS	18
4.1	CONDUCTED EMISSION MEASUREMENT	18
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	18
4.1.2	TEST INSTRUMENTS.....	18
4.1.3	TEST PROCEDURES	19
4.1.4	DEVIATION FROM TEST STANDARD	19
4.1.5	TEST SETUP	20
4.1.6	EUT OPERATING CONDITIONS	20
4.1.7	TEST RESULTS	21
4.2	RADIATED EMISSION MEASUREMENT	25
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	25
4.2.2	TEST INSTRUMENTS.....	26
4.2.3	TEST PROCEDURES	27
4.2.4	DEVIATION FROM TEST STANDARD	27
4.2.5	TEST SETUP	28
4.2.6	EUT OPERATING CONDITIONS	28
4.2.7	TEST RESULTS	29
4.3	6dB BANDWIDTH MEASUREMENT	58
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	58
4.3.2	TEST INSTRUMENTS.....	58
4.3.3	TEST PROCEDURE.....	58
4.3.4	DEVIATION FROM TEST STANDARD	58
4.3.5	TEST SETUP	58
4.3.6	EUT OPERATING CONDITIONS	58
4.3.7	TEST RESULTS	59
4.4	MAXIMUM PEAK OUTPUT POWER.....	63
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	63
4.4.2	INSTRUMENTS.....	63



A D T

4.4.3	TEST PROCEDURES	63
4.4.4	DEVIATION FROM TEST STANDARD	63
4.4.5	TEST SETUP	63
4.4.6	EUT OPERATING CONDITIONS	63
4.4.7	TEST RESULTS	64
4.5	POWER SPECTRAL DENSITY MEASUREMENT	65
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	65
4.5.2	TEST INSTRUMENTS.....	65
4.5.3	TEST PROCEDURE.....	65
4.5.4	DEVIATION FROM TEST STANDARD	65
4.5.5	TEST SETUP	65
4.5.6	EUT OPERATING CONDITION.....	65
4.5.7	TEST RESULTS	66
4.6	CONDUCTED OUT-BAND EMISSION MEASUREMENT	70
4.6.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	70
4.6.2	TEST INSTRUMENTS.....	70
4.6.3	TEST PROCEDURE.....	70
4.6.4	DEVIATION FROM TEST STANDARD	70
4.6.5	EUT OPERATING CONDITION.....	70
4.6.6	TEST RESULTS	70
5.	INFORMATION ON THE TESTING LABORATORIES	79
6.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	80



1. CERTIFICATION

PRODUCT: ZoneFlex 7025 Access Point
BRAND NAME: Ruckus Wireless
MODEL NO.: ZoneFlex 7025 Access Point
TEST SAMPLE: R&D SAMPLE
TESTED: Oct. 29 to Nov. 03, 2010
APPLICANT: Ruckus Wireless, Inc.
STANDARDS: FCC Part 15, Subpart C (Section 15.247)
ANSI C63.4-2003

The above equipment (Model: ZoneFlex 7025 Access Point) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Midoli Peng , **DATE:** Nov. 29, 2010
(Midoli Peng, Specialist)

TECHNICAL ACCEPTANCE : Hank Chung , **DATE:** Nov. 29, 2010
(Hank Chung, Deputy Manager)

APPROVED BY : May Chen , **DATE:** Nov. 29, 2010
(May Chen, Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -10.82dB at 0.434MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.5dB at 2390.0MHz
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Conducted Out-Band Emission Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.



A D T

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.45 dB
Radiated emissions (30MHz-1GHz)	3.76 dB
Radiated emissions (1GHz -18GHz)	2.19 dB
Radiated emissions (18GHz -40GHz)	2.56 dB



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	ZoneFlex 7025 Access Point
MODEL NO.	ZoneFlex 7025 Access Point
FCC ID	S9GZF7025
POWER SUPPLY	DC 48V from Power adapter or POE
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11 / 5.5 / 2 / 1Mbps 802.11g: 54 / 48 / 36 / 24 / 18 / 12 / 9 / 6Mbps 802.11n (20MHz, 800ns GI): 130 / 117 / 104 / 78 / 65 / 58.5 / 52 / 39 / 26 / 19.5 / 13 / 6.5Mbps 802.11n (40MHz, 800ns GI): 270 / 243 / 216 / 162 / 135 / 121.5 / 108 / 81 / 54 / 40.5 / 27 / 13.5Mbps 802.11n (20MHz, 400ns GI): 144.4 / 130 / 115.6 / 86.7 / 72.2 / 65 / 57.8 / 43.3 / 28.9 / 21.7 / 14.4 / 7.2Mbps 802.11n (40MHz, 400ns GI): 300 / 270 / 240 / 180 / 150 / 135 / 120 / 90 / 60 / 45 / 30 / 15Mbps
OPERATING FREQUENCY	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11 for 802.11b, 802.11g, 802.11n (20MHz) 7 for 802.11n (40MHz)
MAXIMUM OUTPUT POWER	802.11b: 112.2mW 802.11g: 288.4mW 802.11n (20MHz): 269.2mW 802.11n (40MHz): 257.0mW
ANTENNA TYPE	Chip Antenna without connector (antenna gain :3.21dBi)
DATA CABLE	NA
I/O PORTS	LAN Port x5 Pass Through Port x2
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT must be supplied with a power adapter or POE as below information (Only for test not for sale)

Adapter		
Brand	Model No.	Spec.
PHIHONG	PSC18U-480	AC Input : 100-240V, 0.5A, 50-60Hz DC Output : 48V, 0.38A DC output cable : 1.8m, unshielded with one core
POE		
Brand	Model No.	Spec.
Netstar	POI-101U	AC Input : 100-240V, 0.4A, 50-60Hz DC Output : 48V, 0.35A(MAX) DC output cable : 1.8m, unshielded with one core

2. The EUT was pre-tested under the following modes:

Test Mode	Description
Mode A	POE mode
Mode B	Adapter mode

From the above modes, the worst Radiated Emission was found in **Mode A**. Therefore only the test data of the modes were recorded in this report individually.

3. The EUT incorporates a SISO function with 802.11n.
4. The EUT is 1 * 1 spatial SISO without beam forming function.
5. The EUT, operates in the 2.4GHz frequency range, lets you connect IEEE 802.11g or IEEE 802.11b and 802.11n technique devices to the network.
6. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided for 802.11b, 802.11g, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Seven channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2422MHz	5	2442MHz
2	2427MHz	6	2447MHz
3	2432MHz	7	2452MHz
4	2437MHz		



A D T

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	
A	√	√	√	√	POE mode
B	√	-	-	-	Adapter mode

Where **PLC**: Power Line Conducted Emission **RE < 1G**: Radiated Emission below 1GHz
RE ≥ 1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6



RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	13.5

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 11	OFDM	BPSK	6
802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	6.5
802.11n (40MHz)	1 to 7	1, 7	OFDM	BPSK	13.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	13.5

※ **TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE\geq1G	19deg. C, 70%RH, 1012 hPa	120Vac, 60Hz	Eric Lee
RE$<$1G	19deg. C, 70%RH, 1012 hPa	120Vac, 60Hz	Eric Lee
PLC	26deg. C, 70%RH, 1012 hPa	120Vac, 60Hz	Anderson Chen
APCM	25deg. C, 60%RH, 1012 hPa	120Vac, 60Hz	Kent Liu



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



A D T

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP19L	CN-OHC416-70166-5C A-0448	PIW63250051661 0
2	HUB	ZyXEL	ES-116P	S060H02000215	FCC DoC
3	ZoneFlex 7025 Access Point	Ruckus Wireless	ZoneFlex 7025 Access Point	NA	FCC DoC

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	UTP Cable (10m)
3	UTP Cable (10m)


NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST


For conducted emission – POE mode

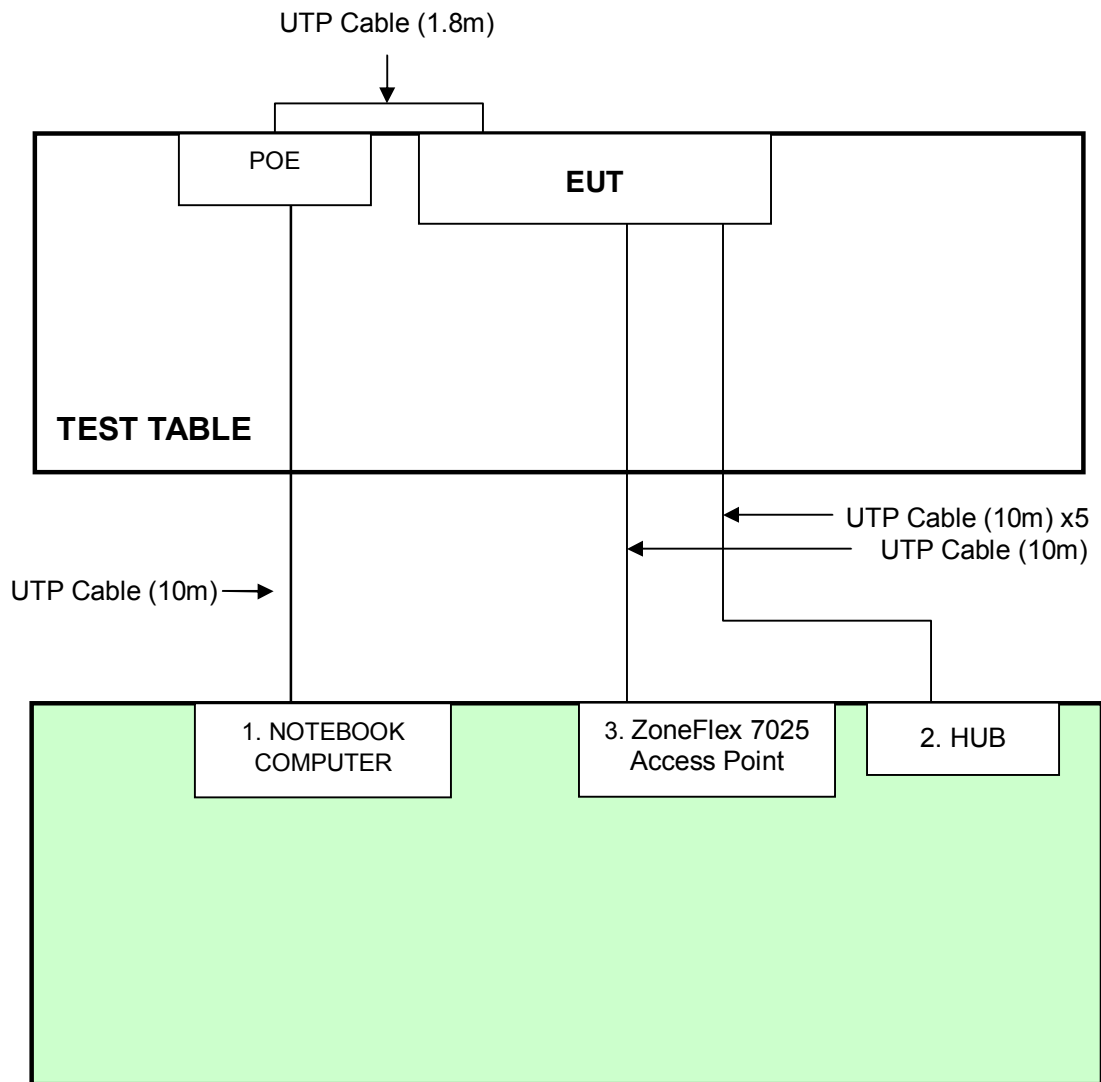

For conducted emission– Adapter mode

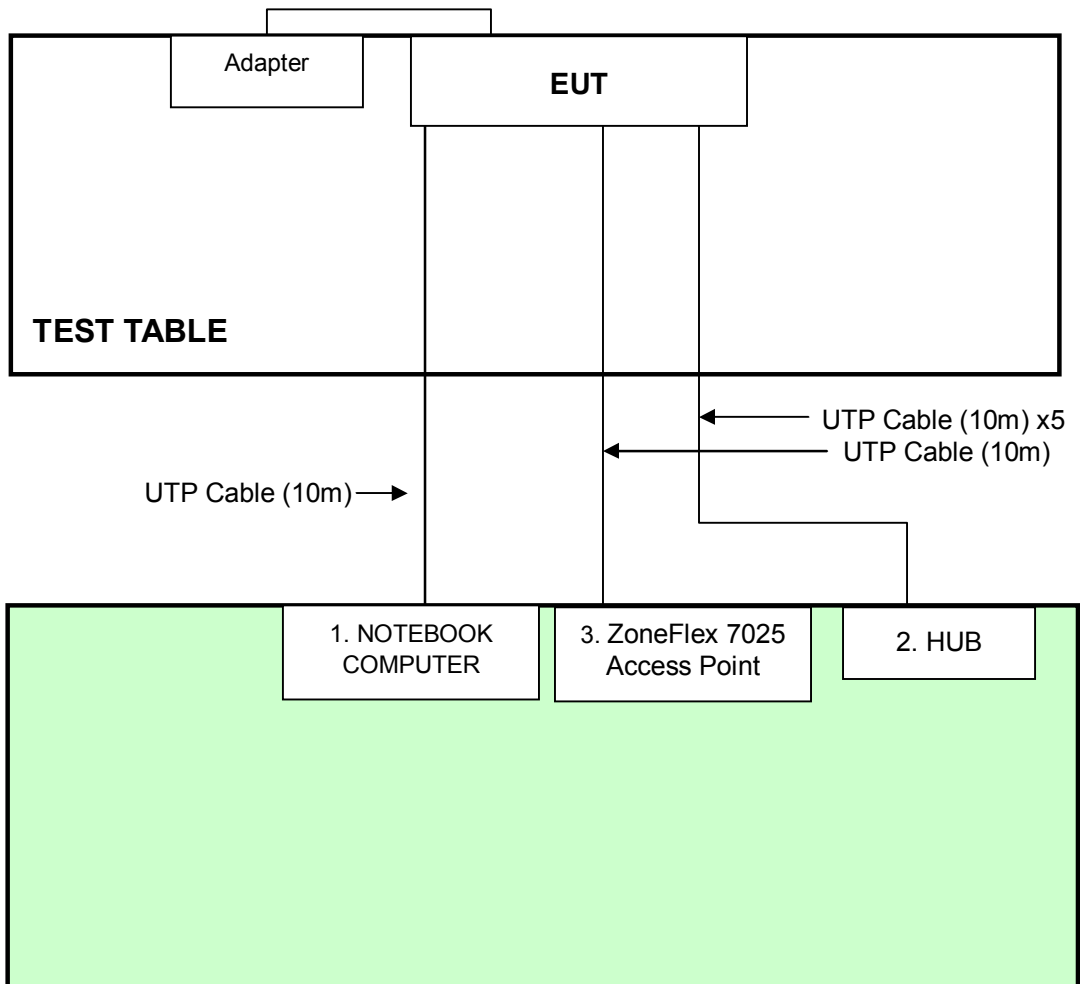

For other test items

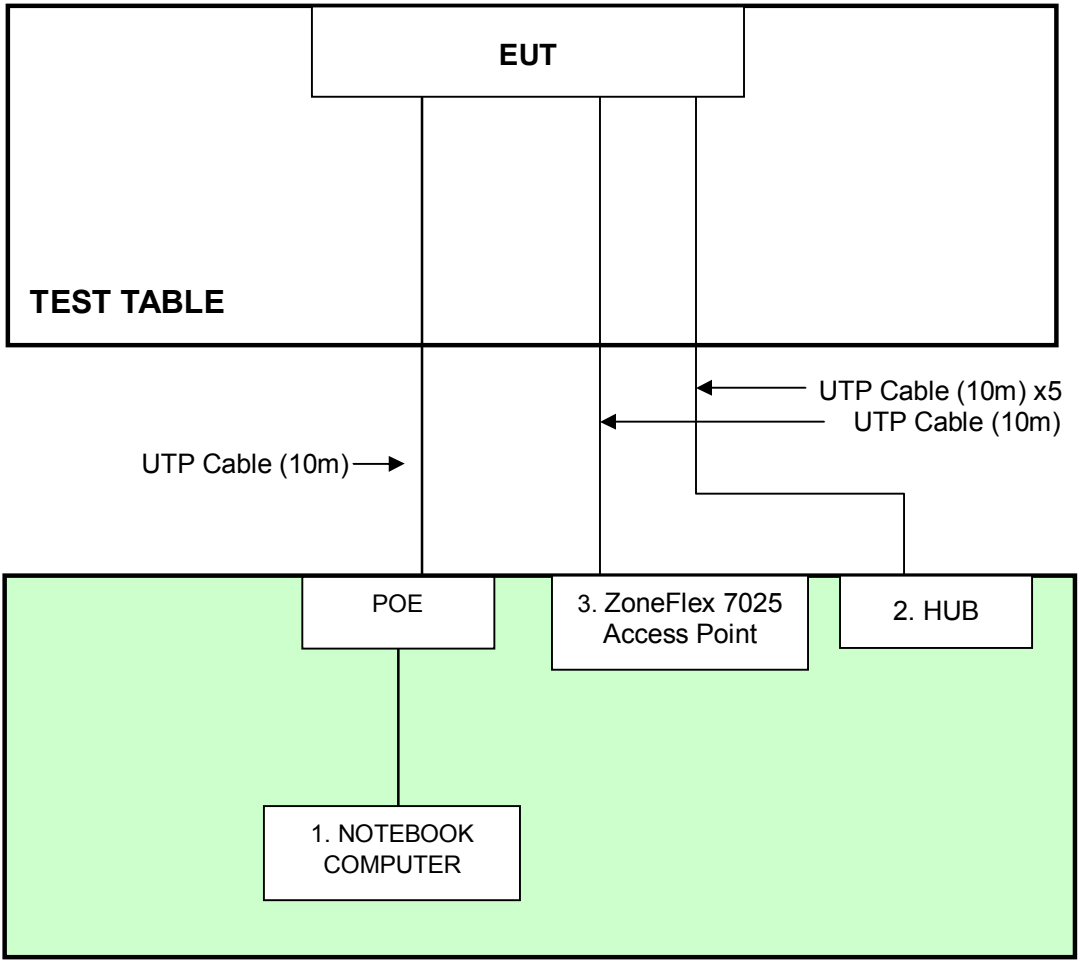

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
0.15-0.5	Quasi-peak	Average
0.5-5	66 to 56	56 to 46
5-30	56	46
	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

Test date: Nov. 03, 2010

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	100287	Mar. 01, 2010	Feb. 28, 2011
Line-Impedance Stabilization Network (for EUT)	NSLK 8127	8127-523	Sep. 23, 2010	Sep. 22, 2011
Line-Impedance Stabilization Network (for Peripheral)	ENV-216	100072	June 11, 2010	June 10, 2011
RF Cable (JYEBAO)	5DFB	COACAB-001	Dec. 14, 2009	Dec. 13, 2010
50 ohms Terminator	50	3	Oct. 28, 2010	Oct. 27, 2011
Software	BV ADT_Cond_V7.3.7	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

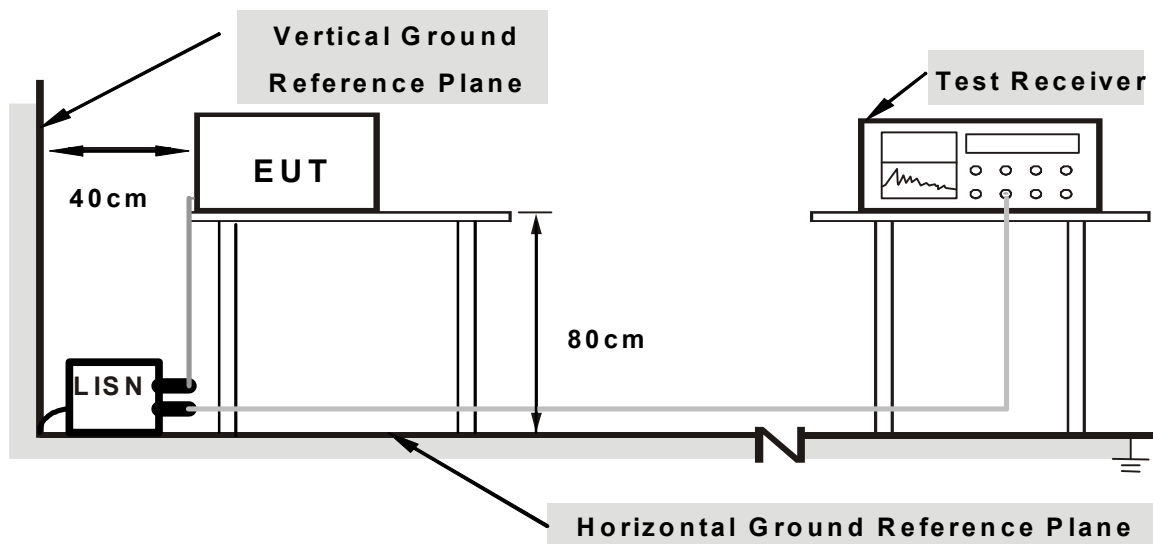

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

1. Placed the EUT on the testing table.
2. Prepared other computer systems to act as a communication partner and placed them outside of testing area.
3. The communication partner ran test program “ART Rev09 B21” to enable EUT under transmission/receiving condition continuously at specific channel frequency via UTP cables.


4.1.7 TEST RESULTS

802.11g OFDM MODULATION:

TEST MODE	POE mode		
PHASE	Line (L)	6dB BANDWIDTH	9 kHz

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.189	0.36	47.59	-	47.95	-	64.10	54.10	-16.15	-
2	0.434	0.36	46.00	-	46.36	-	57.18	47.18	-10.82	-
3	0.744	0.39	40.42	-	40.81	-	56.00	46.00	-15.19	-
4	1.054	0.41	41.46	-	41.87	-	56.00	46.00	-14.13	-
5	4.582	0.53	42.42	-	42.95	-	56.00	46.00	-13.05	-
6	11.145	0.76	44.43	-	45.19	-	60.00	50.00	-14.81	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

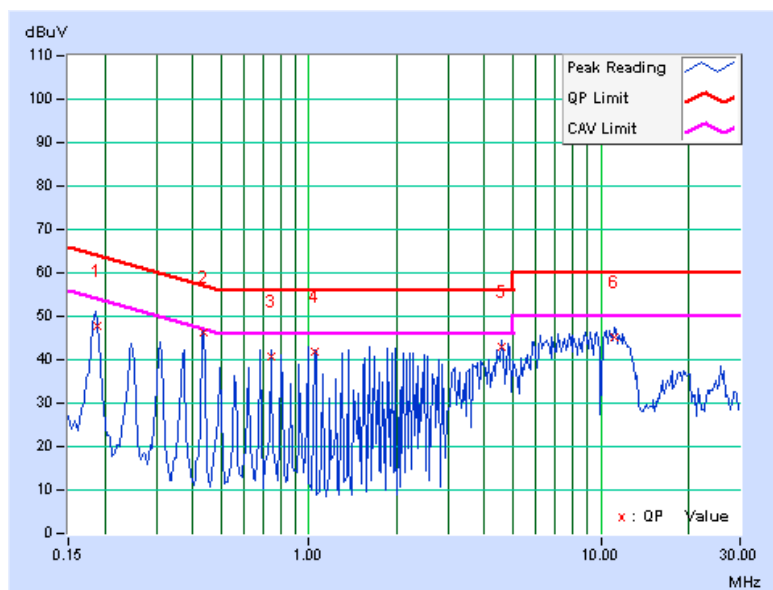

TEST MODE	POE mode		
PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.186	0.10	47.97	-	48.07	-	64.22
2	0.434	0.11	44.34	-	44.45	-	57.18	47.18	-12.73	-
3	0.681	0.13	38.11	-	38.24	-	56.00	46.00	-17.76	-
4	0.992	0.16	37.91	-	38.07	-	56.00	46.00	-17.93	-
5	1.918	0.20	40.55	-	40.75	-	56.00	46.00	-15.25	-
6	11.568	0.62	45.10	-	45.72	-	60.00	50.00	-14.28	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

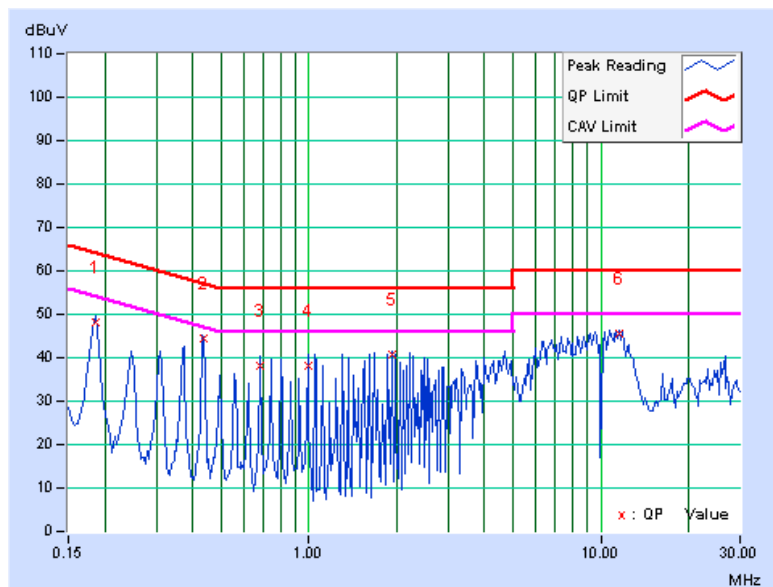


802.11g OFDM MODULATION:

TEST MODE	Adapter mode		
PHASE	Line (L)	6dB BANDWIDTH	9 kHz

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.205	0.36	38.24	-	38.60	-	63.42
2	0.416	0.36	44.72	-	45.08	-	57.54	47.54	-12.45	-
3	0.615	0.38	35.39	-	35.77	-	56.00	46.00	-20.23	-
4	0.964	0.41	34.11	-	34.52	-	56.00	46.00	-21.48	-
5	3.543	0.50	32.59	-	33.09	-	56.00	46.00	-22.91	-
6	17.978	1.02	42.06	-	43.08	-	60.00	50.00	-16.92	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

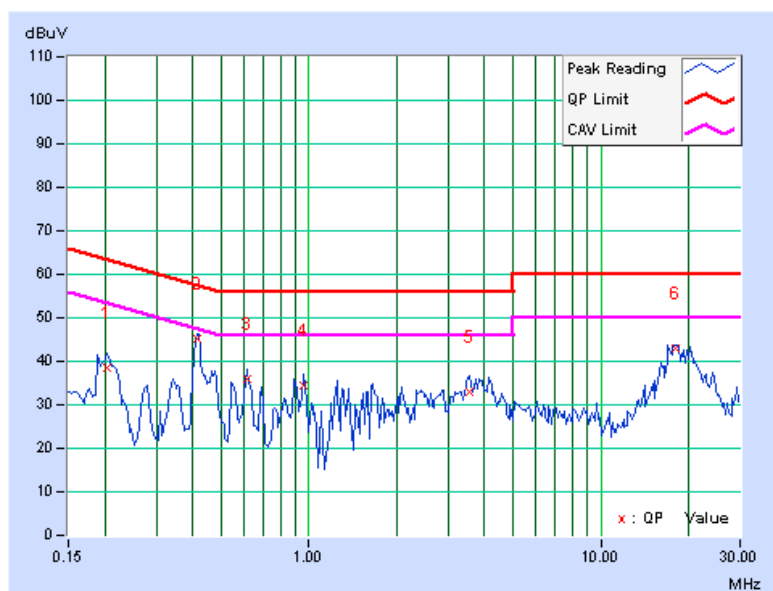

TEST MODE	Adapter mode		
PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.207	0.10	38.50	-	38.60	-	63.33
2	0.418	0.11	45.76	-	45.87	-	57.50	47.50	-11.63	-
3	0.966	0.16	34.99	-	35.15	-	56.00	46.00	-20.85	-
4	2.059	0.20	32.72	-	32.92	-	56.00	46.00	-23.08	-
5	3.582	0.23	33.35	-	33.58	-	56.00	46.00	-22.42	-
6	18.245	1.06	42.88	-	43.94	-	60.00	50.00	-16.06	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

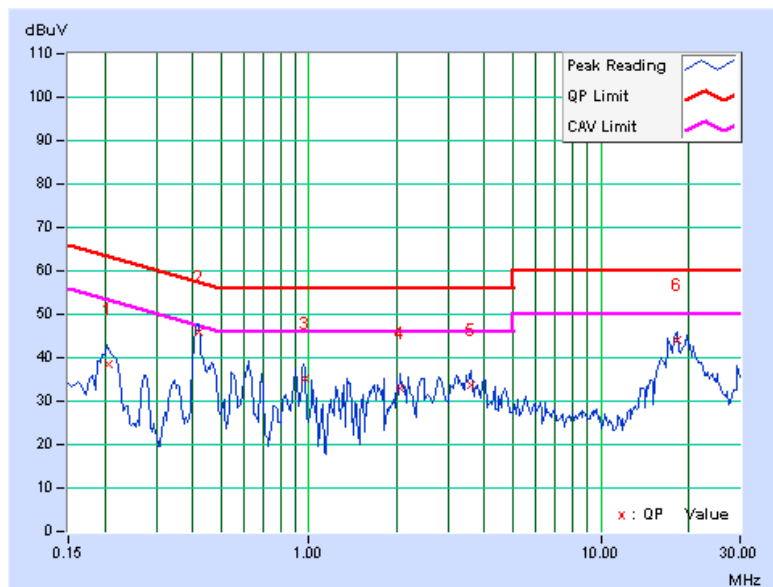

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
4. Section 15.205 restricted bands of operation shall compliance with the limits in Section 15.209.



A D T

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250253	Aug. 23, 2010	Aug. 22, 2011
Agilent Pre-Selector	N9039A	MY46520310	Aug. 23, 2010	Aug. 22, 2011
Agilent Signal Generator	N5181A	MY49060347	July 30, 2010	July 29, 2011
LIG NEX1 Test Receiver	ER-265	L09068005	Oct. 25, 2010	Oct. 24, 2011
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-04	Nov. 18, 2009	Nov. 17, 2010
Agilent Pre-Amplifier	8449B	3008A02465	Mar. 01, 2010	Feb. 28, 2011
Miteq Pre-Amplifier	AFS33-1800265 0-30-8P-44	881786	NA	NA
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-361	Apr. 28, 2010	Apr. 27, 2011
AISI Horn_Antenna	AIH.8018	0000220091110	Nov. 16, 2009	Nov. 15, 2010
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Oct. 08, 2010	Oct. 07, 2011
RF CABLE	NA	RF104-205 RF104-207 RF104-208	Dec. 24, 2009	Dec. 23, 2010
RF Cable	NA	CHHCAB_001	NA	NA
Software	ADT_Radiated_V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in 966 Chamber No. H.

4. The FCC Site Registration No. is 797305.

5. The CANADA Site Registration No. is IC 7450H-3.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

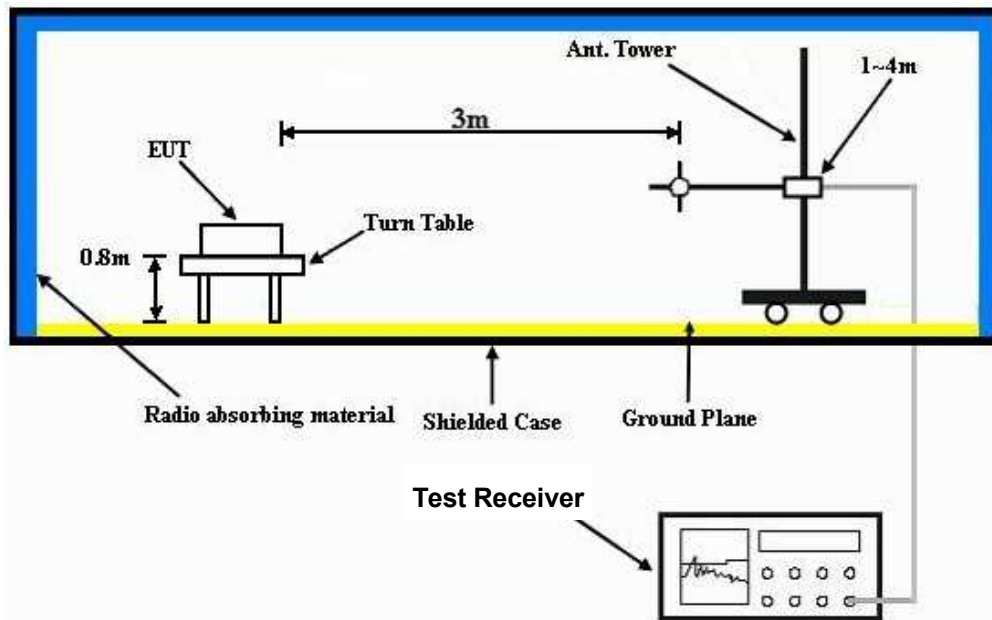

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as the 4.1.6



A D T

4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA : 802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	19deg. C, 70%RH 1012 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	81.16	28.6 QP	40.0	-11.4	1.50 H	43	18.80	9.81
2	182.29	30.7 QP	43.5	-12.8	1.25 H	38	18.16	12.53
3	250.03	40.2 QP	46.0	-5.9	1.00 H	18	27.20	12.95
4	750.01	33.8 QP	46.0	-12.2	1.00 H	130	9.55	24.28
5	799.98	40.4 QP	46.0	-5.6	1.00 H	246	15.28	25.15
6	874.95	36.3 QP	46.0	-9.7	1.50 H	283	9.99	26.29

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	49.42	36.9 QP	40.0	-3.1	1.00 V	3	22.59	14.29
2	55.93	35.8 QP	40.0	-4.2	1.50 V	194	22.27	13.55
3	81.40	35.6 QP	40.0	-4.4	1.50 V	356	25.83	9.81
4	250.03	43.3 QP	46.0	-2.7	1.50 V	18	30.37	12.95
5	500.02	35.2 QP	46.0	-10.8	1.00 V	87	15.11	20.11
6	799.98	39.1 QP	46.0	-6.9	1.25 V	52	13.94	25.15

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



A D T

ABOVE 1GHz WORST-CASE DATA

802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	19deg. C, 70%RH 1012 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2389.20	58.0 PK	74.0	-16.0	1.43 H	244	26.38	31.62
2	2389.20	47.1 AV	54.0	-6.9	1.43 H	244	15.48	31.62
3	*2412.00	106.7 PK			1.44 H	250	75.00	31.70
4	*2412.00	104.5 AV			1.44 H	250	72.80	31.70
5	4824.00	47.4 PK	74.0	-26.6	1.22 H	83	9.61	37.79
6	4824.00	37.9 AV	54.0	-16.1	1.22 H	83	0.11	37.79
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2388.90	57.2 PK	74.0	-16.8	1.16 V	334	25.58	31.62
2	2388.90	45.0 AV	54.0	-9.0	1.16 V	334	13.38	31.62
3	*2412.00	102.7 PK			1.17 V	326	71.00	31.70
4	*2412.00	99.9 AV			1.17 V	326	68.20	31.70
5	4824.00	47.6 PK	74.0	-26.4	1.30 V	91	9.81	37.79
6	4824.00	37.7 AV	54.0	-16.3	1.30 V	91	-0.09	37.79

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	19deg. C, 70%RH 1012 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	107.1 PK			1.29 H	266	75.30	31.80
2	*2437.00	104.3 AV			1.29 H	266	72.50	31.80
3	4874.00	47.0 PK	74.0	-27.0	1.44 H	280	9.10	37.90
4	4874.00	36.9 AV	54.0	-17.1	1.44 H	280	-1.00	37.90
5	7311.00	49.5 PK	74.0	-24.5	1.42 H	211	4.22	45.28
6	7311.00	39.0 AV	54.0	-15.0	1.42 H	211	-6.28	45.28

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.6 PK			1.19 V	333	70.80	31.80
2	*2437.00	99.8 AV			1.19 V	333	68.00	31.80
3	4874.00	47.4 PK	74.0	-26.6	1.20 V	269	9.50	37.90
4	4874.00	37.1 AV	54.0	-16.9	1.20 V	269	-0.80	37.90
5	7311.00	49.8 PK	74.0	-24.2	1.14 V	300	4.52	45.28
6	7311.00	38.9 AV	54.0	-15.1	1.14 V	300	-6.38	45.28

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	19deg. C, 70%RH 1012 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.0 PK			1.33 H	250	75.11	31.89
2	*2462.00	104.2 AV			1.33 H	250	72.31	31.89
3	2483.50	58.5 PK	74.0	-15.5	1.29 H	266	26.53	31.97
4	2483.50	45.9 AV	54.0	-8.1	1.29 H	266	13.93	31.97
5	4924.00	46.9 PK	74.0	-27.1	1.50 H	288	8.88	38.02
6	4924.00	37.2 AV	54.0	-16.8	1.50 H	288	-0.82	38.02
7	7386.00	49.6 PK	74.0	-24.4	1.48 H	209	4.14	45.46
8	7386.00	38.6 AV	54.0	-15.4	1.48 H	209	-6.86	45.46

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M



NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.2 PK			1.21 V	332	70.31	31.89
2	*2462.00	99.5 AV			1.21 V	332	67.61	31.89
3	2483.50	57.2 PK	74.0	-16.8	1.20 V	333	25.23	31.97
4	2483.50	45.0 AV	54.0	-9.0	1.20 V	333	13.03	31.97
5	4924.00	47.2 PK	74.0	-26.8	1.49 V	299	9.18	38.02
6	4924.00	37.1 AV	54.0	-16.9	1.49 V	299	-0.92	38.02
7	7386.00	49.9 PK	74.0	-24.1	1.50 V	211	4.44	45.46
8	7386.00	38.7 AV	54.0	-15.3	1.50 V	211	-6.76	45.46

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T



RESTRICTED BANDEDGE (802.11b MODE, CH1, HORIZONTAL)

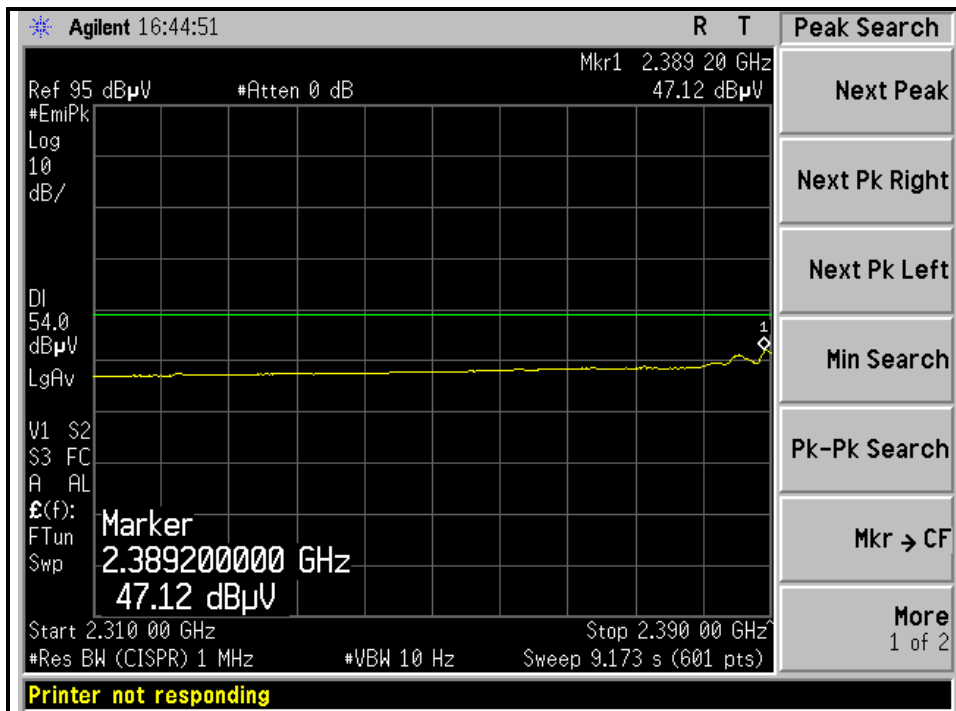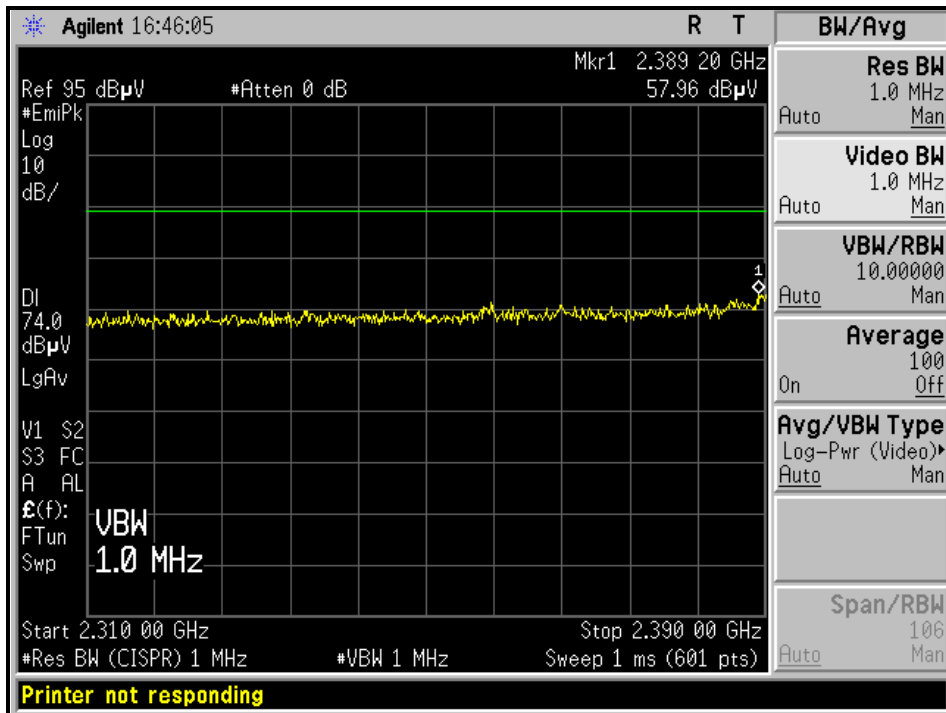



A D T



RESTRICTED BANDEDGE (802.11b MODE, CH1, VERTICAL)

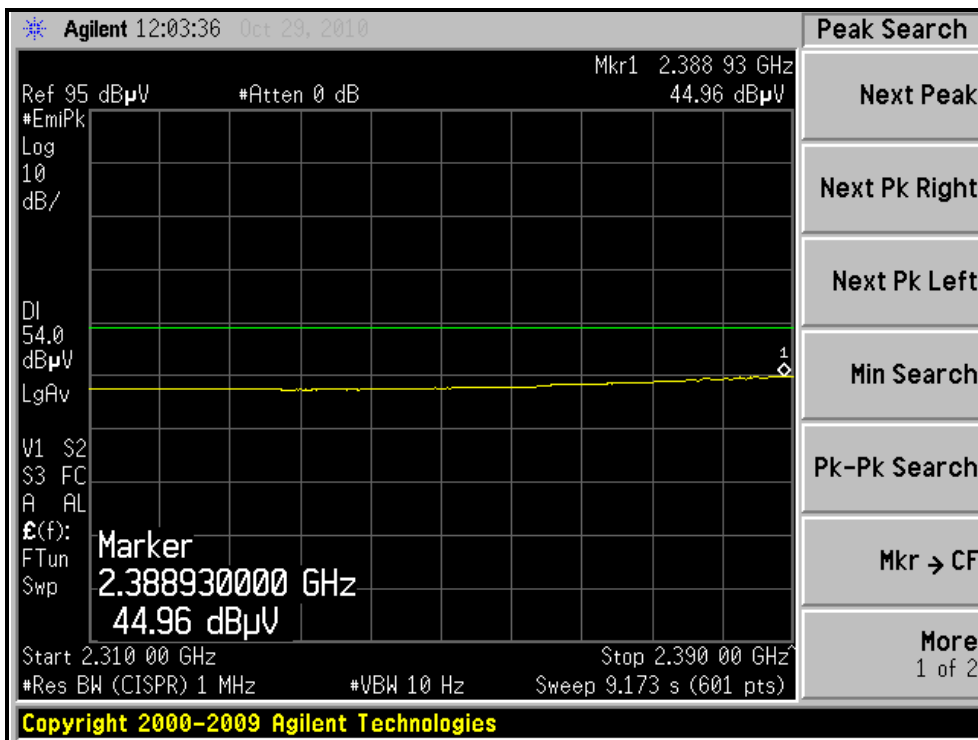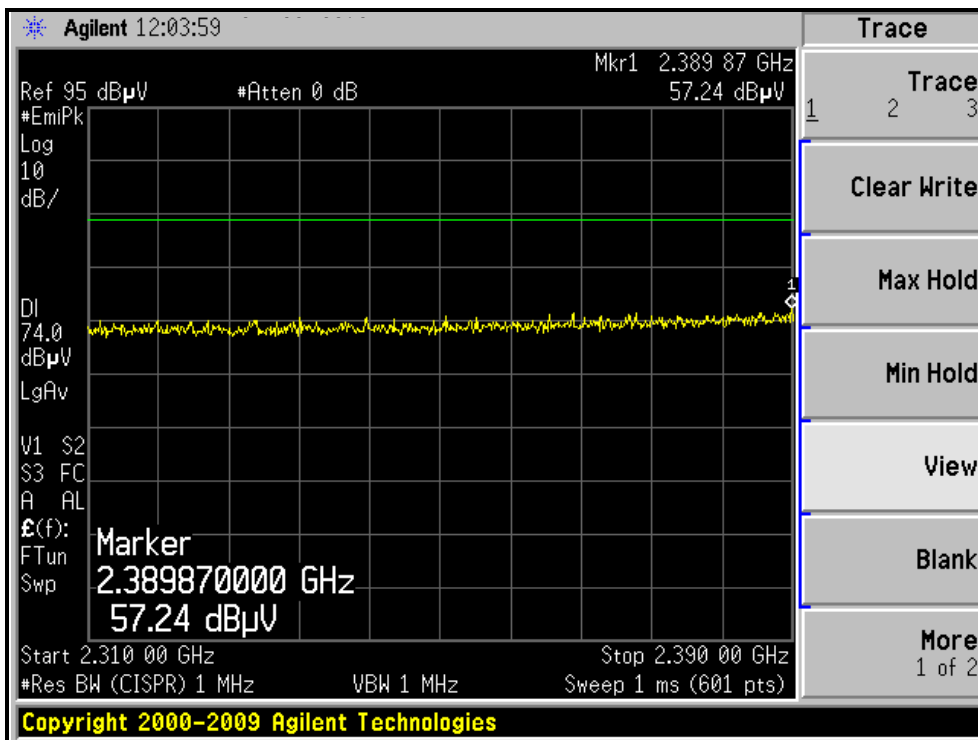



A D T



RESTRICTED BANDEDGE (802.11b MODE, CH11, HORIZONTAL)

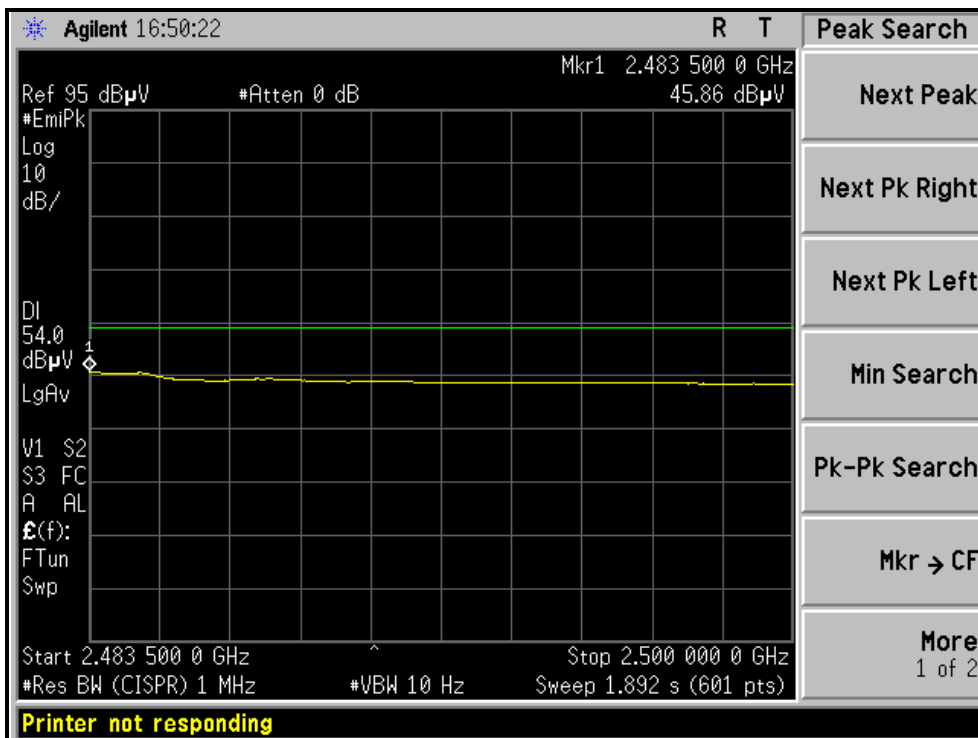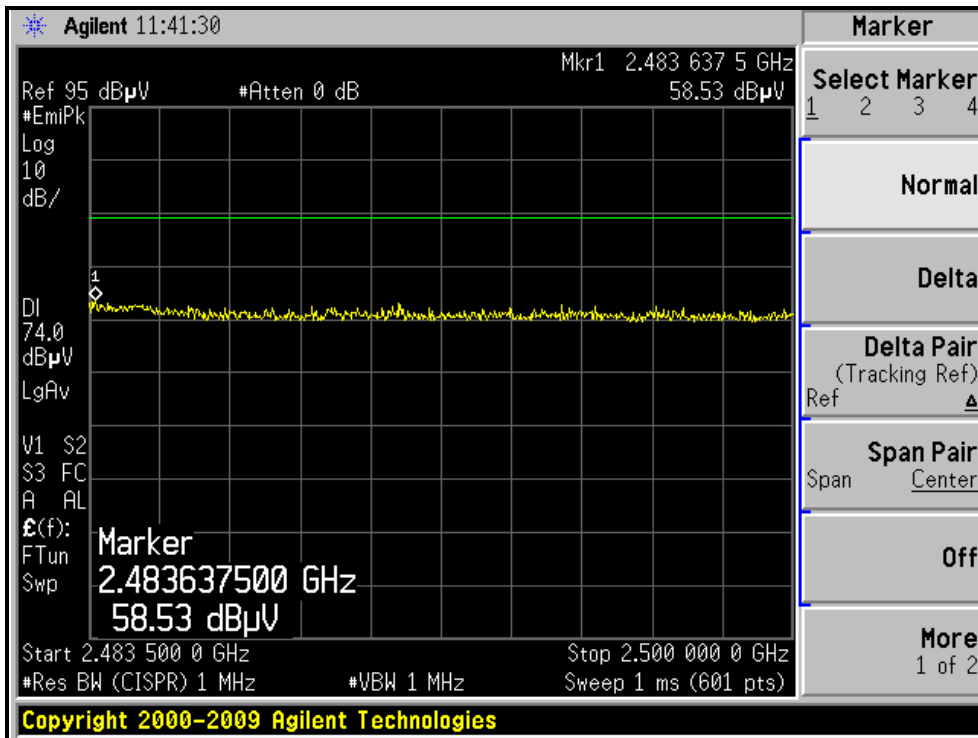



A D T

RESTRICTED BANDEDGE (802.11b MODE, CH11, VERTICAL)

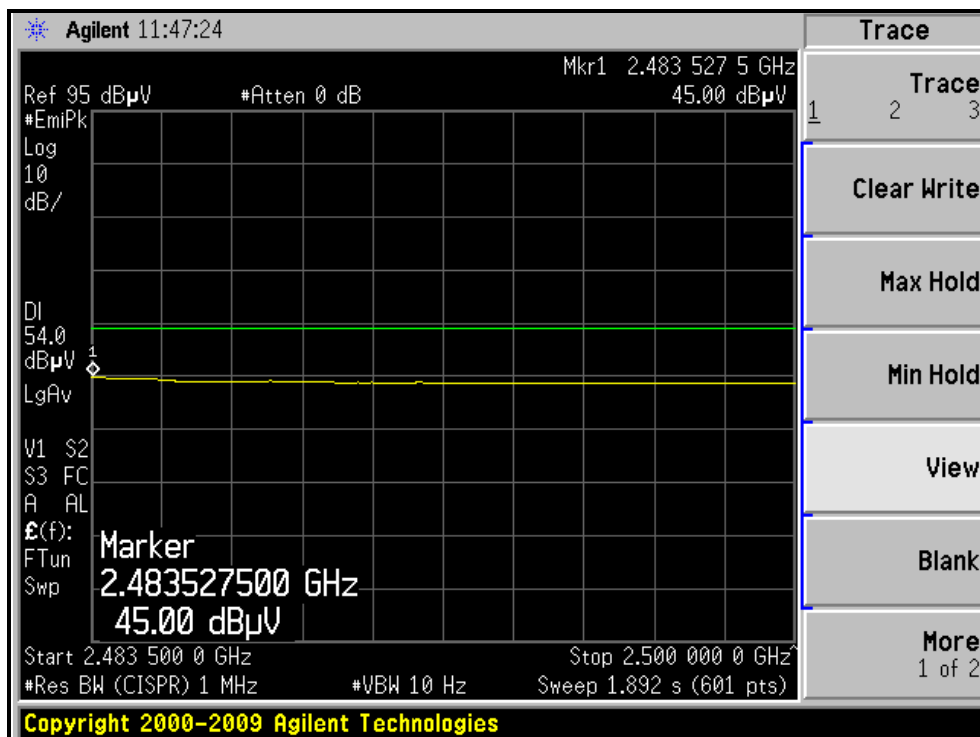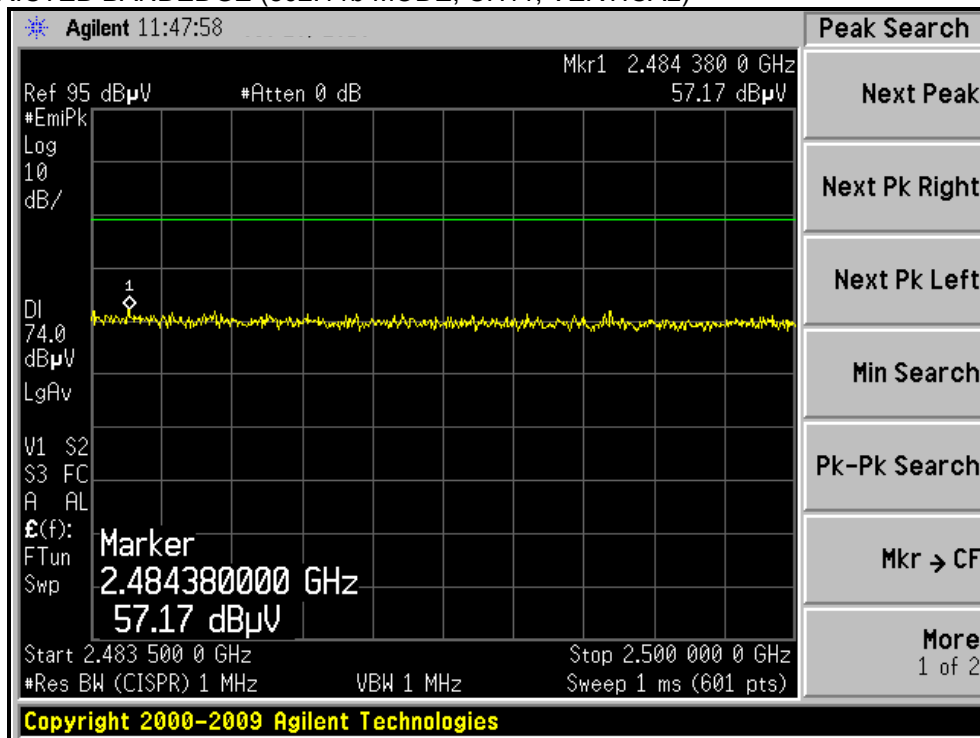



A D T

802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	19deg. C, 70%RH 1012 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.3 PK	74.0	-2.7	1.14 H	250	39.57	31.73
2	2390.00	52.4 AV	54.0	-1.6	1.14 H	250	20.67	31.73
3	*2412.00	109.9 PK			1.14 H	246	78.11	31.79
4	*2412.00	99.5 AV			1.14 H	246	67.71	31.79
5	4824.00	43.8 PK	74.0	-30.2	1.33 H	86	3.62	40.18
6	4824.00	34.1 AV	54.0	-19.9	1.33 H	86	-6.08	40.18
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.1 PK	74.0	-6.9	1.19 V	320	35.37	31.73
2	2390.00	48.0 AV	54.0	-6.0	1.19 V	320	16.27	31.73
3	*2412.00	105.5 PK			1.18 V	358	73.71	31.79
4	*2412.00	95.3 AV			1.18 V	358	63.51	31.79
5	4824.00	43.9 PK	74.0	-30.1	1.29 V	100	3.72	40.18
6	4824.00	34.3 AV	54.0	-19.7	1.29 V	100	-5.88	40.18

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	19deg. C, 70%RH 1012 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	110.1 PK			1.15 H	233	78.24	31.86
2	*2437.00	99.6 AV			1.15 H	233	67.74	31.86
3	4874.00	44.2 PK	74.0	-29.8	1.29 H	69	3.82	40.38
4	4874.00	34.5 AV	54.0	-19.5	1.29 H	69	-5.88	40.38
5	7311.00	50.2 PK	74.0	-23.8	1.22 H	84	5.16	45.04
6	7311.00	38.6 AV	54.0	-15.4	1.22 H	84	-6.44	45.04

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	105.2 PK			1.31 V	351	73.34	31.86
2	*2437.00	95.1 AV			1.31 V	351	63.24	31.86
3	4874.00	44.3 PK	74.0	-29.7	1.30 V	265	3.92	40.38
4	4874.00	34.3 AV	54.0	-19.7	1.30 V	265	-6.08	40.38
5	7311.00	50.4 PK	74.0	-23.6	1.41 V	11	5.36	45.04
6	7311.00	38.5 AV	54.0	-15.5	1.41 V	11	-6.54	45.04

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	19deg. C, 70%RH 1012 hPa	TESTED BY	Eric Lee



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.4 PK			1.35 H	242	75.47	31.93
2	*2462.00	97.9 AV			1.35 H	242	65.97	31.93
3	2483.50	72.2 PK	74.0	-1.8	1.30 H	260	40.21	31.99
4	2483.50	52.1 AV	54.0	-1.9	1.30 H	260	20.11	31.99
5	4924.00	44.8 PK	74.0	-29.2	1.38 H	299	4.22	40.58
6	4924.00	34.6 AV	54.0	-19.4	1.38 H	299	-5.98	40.58
7	7386.00	49.7 PK	74.0	-24.3	1.11 H	69	4.58	45.12
8	7386.00	38.7 AV	54.0	-15.3	1.11 H	69	-6.42	45.12
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.0 PK			1.19 V	350	71.07	31.93
2	*2462.00	93.1 AV			1.19 V	350	61.17	31.93
3	2483.50	69.2 PK	74.0	-4.8	1.21 V	332	37.21	31.99
4	2483.50	50.7 AV	54.0	-3.3	1.21 V	332	18.71	31.99
5	4924.00	44.5 PK	74.0	-29.5	1.41 V	301	3.92	40.58
6	4924.00	34.7 AV	54.0	-19.3	1.41 V	301	-5.88	40.58
7	7386.00	49.5 PK	74.0	-24.5	1.21 V	114	4.38	45.12
8	7386.00	38.3 AV	54.0	-15.7	1.21 V	114	-6.82	45.12

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T



RESTRICTED BANDEDGE (802.11g MODE, CH1, HORIZONTAL)

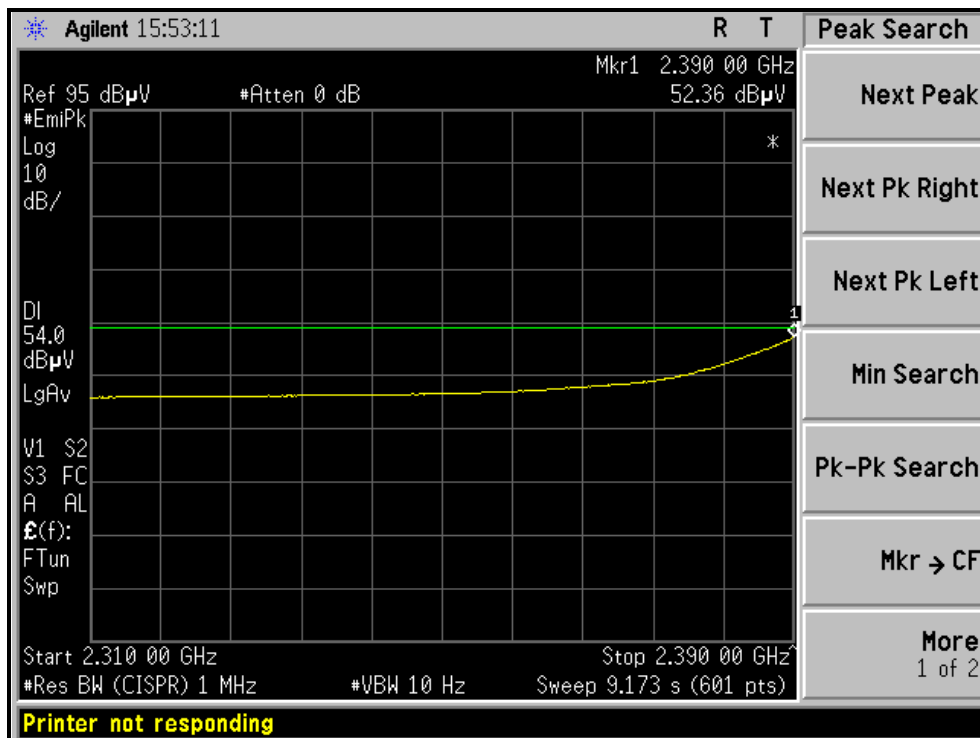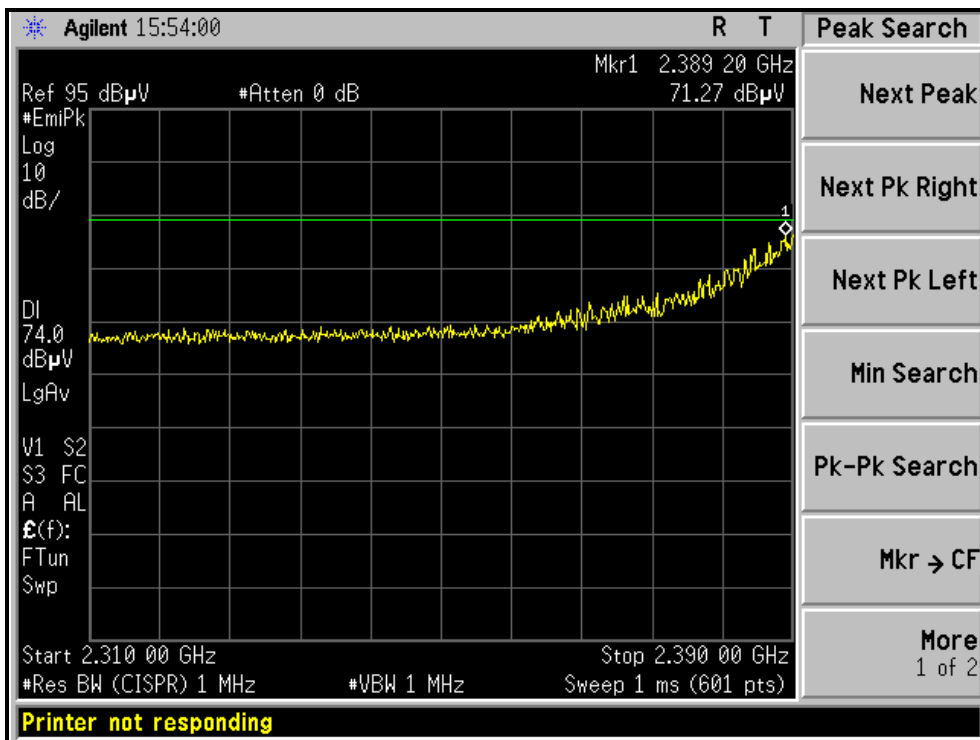



A D T



RESTRICTED BANDEDGE (802.11g MODE, CH1, VERTICAL)

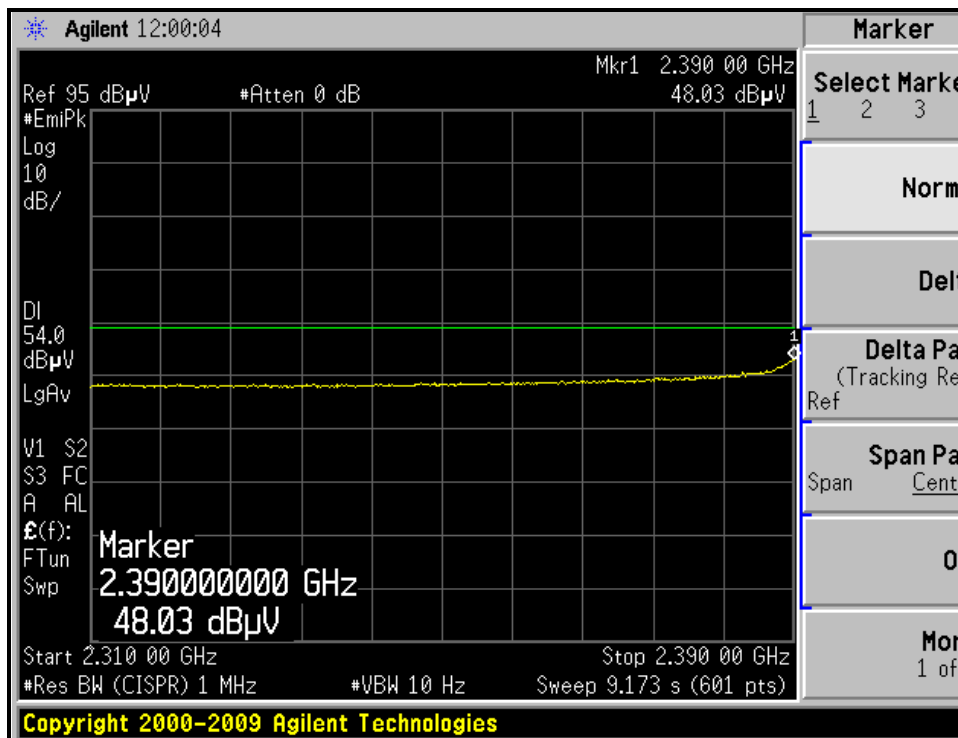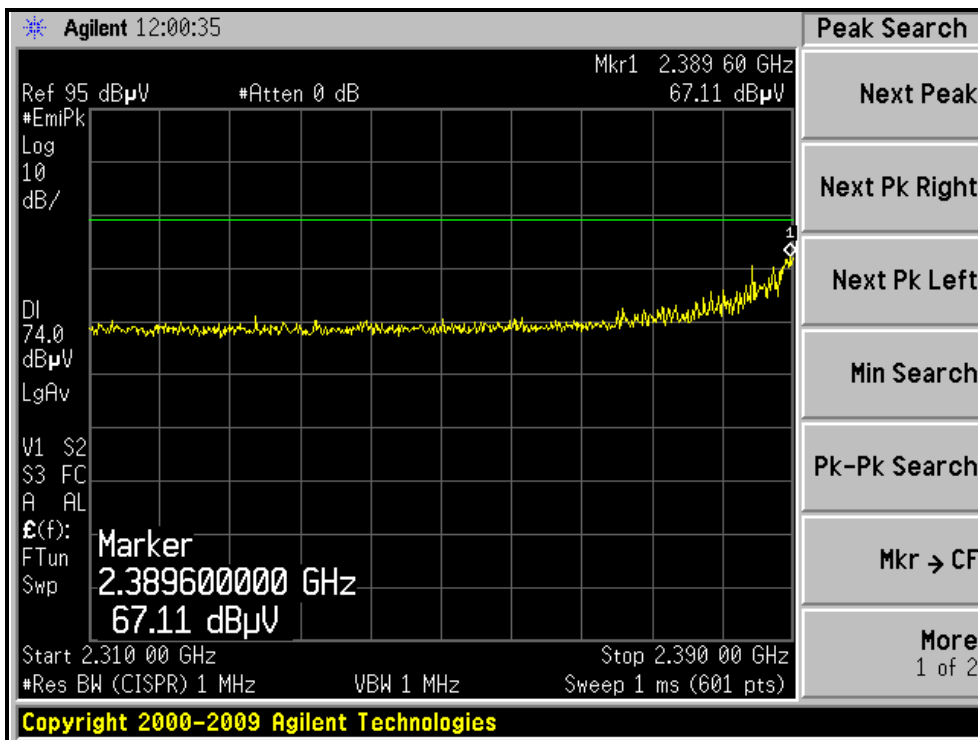



A D T



RESTRICTED BANDEDGE (802.11g MODE, CH11, HORIZONTAL)

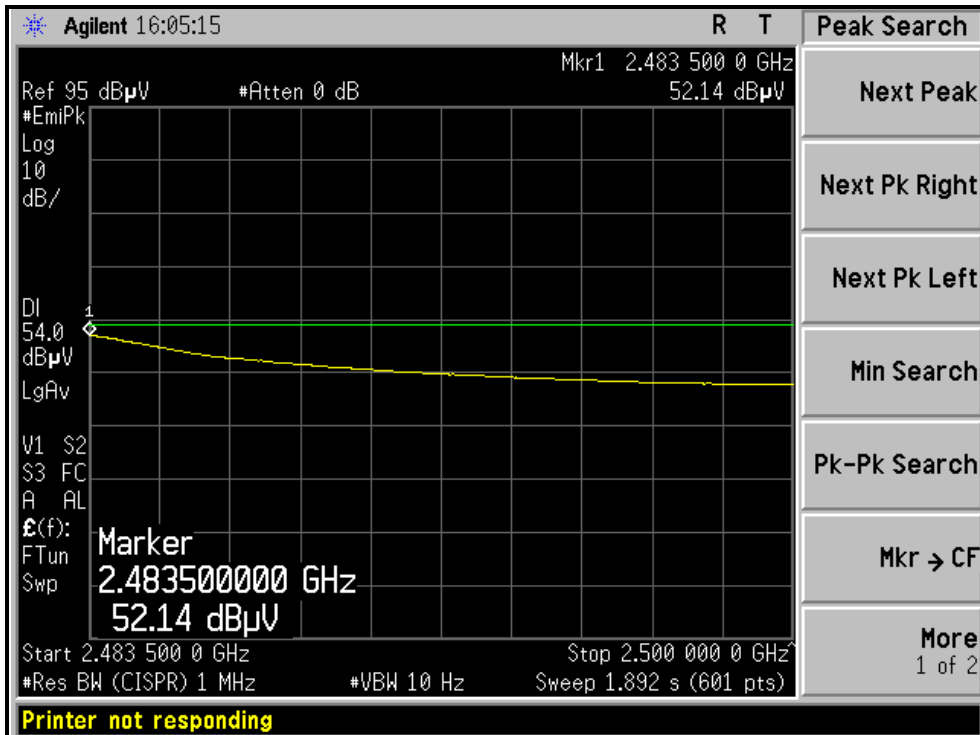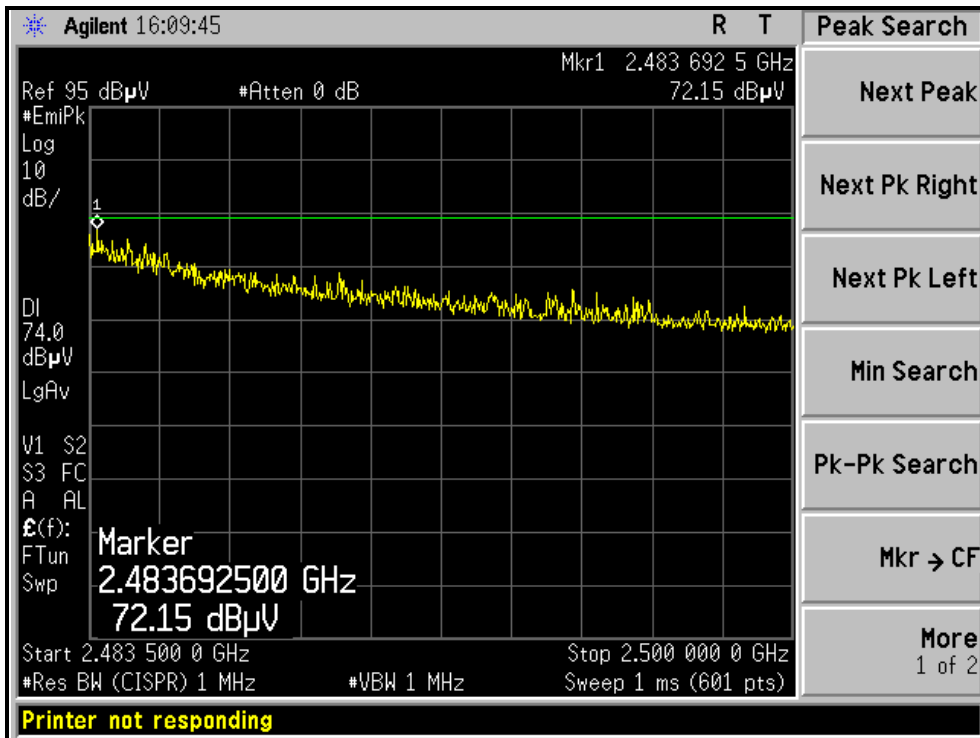



A D T

RESTRICTED BANDEDGE (802.11g MODE, CH11, VERTICAL)

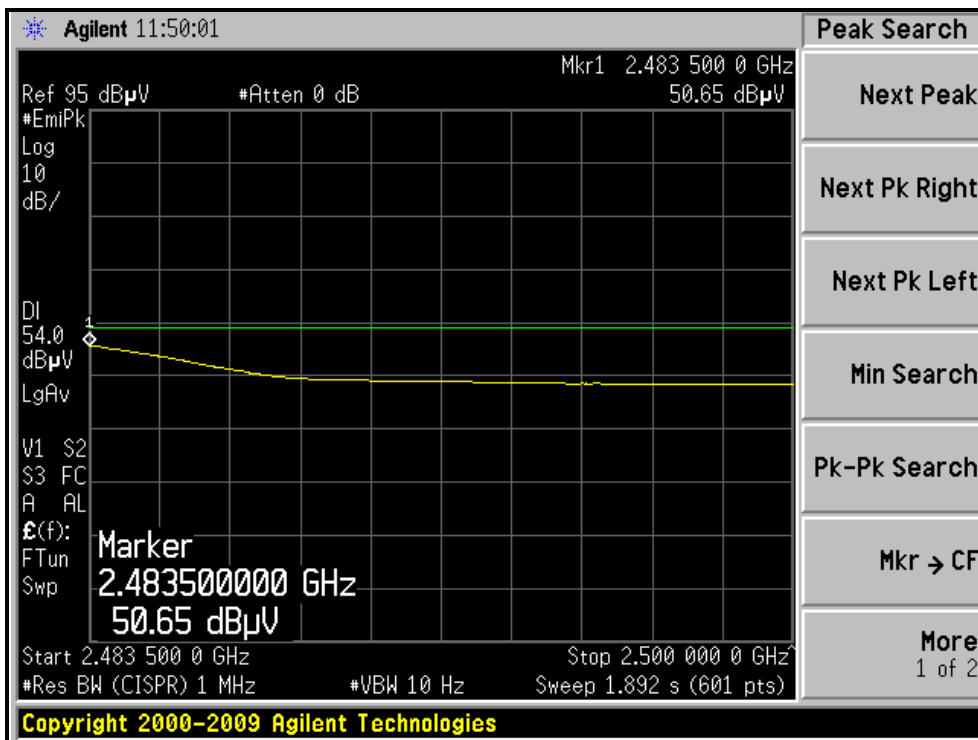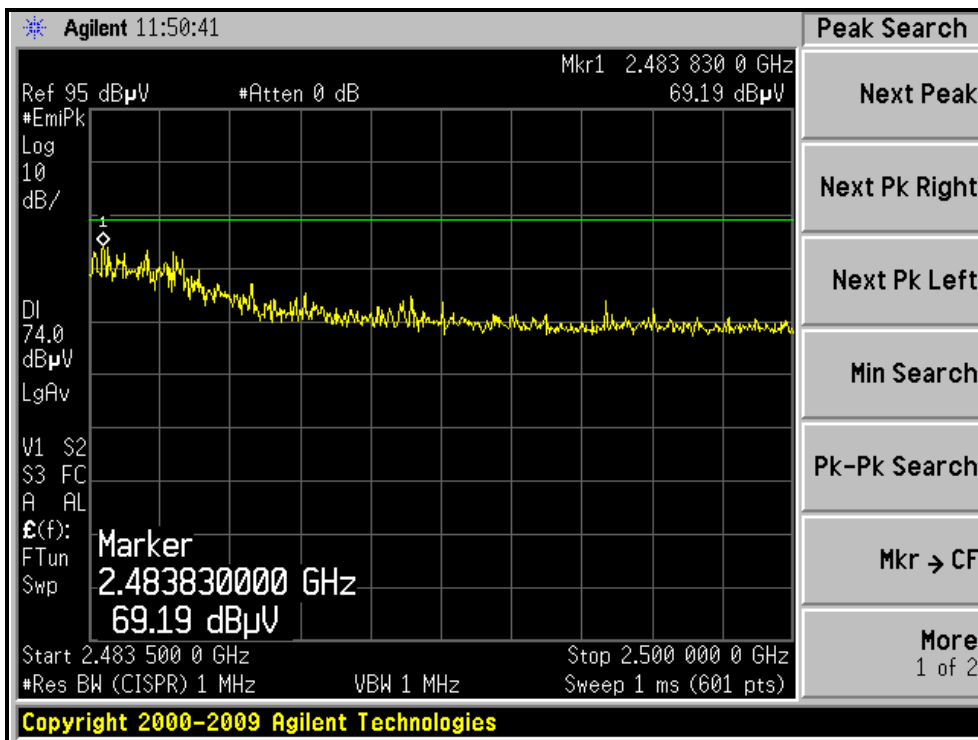



A D T

802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	19deg. C, 70%RH 1012 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.6 PK	74.0	-3.4	1.50 H	266	38.87	31.73
2	2390.00	52.5 AV	54.0	-1.5	1.50 H	266	20.77	31.73
3	*2412.00	108.3 PK			1.43 H	245	76.51	31.79
4	*2412.00	98.7 AV			1.43 H	245	66.91	31.79
5	4824.00	44.5 PK	74.0	-29.5	1.25 H	69	4.32	40.18
6	4824.00	34.7 AV	54.0	-19.3	1.25 H	69	-5.48	40.18
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.2 PK	74.0	-6.8	1.11 V	333	35.47	31.73
2	2390.00	50.1 AV	54.0	-3.9	1.11 V	333	18.37	31.73
3	*2412.00	104.2 PK			1.18 V	326	72.41	31.79
4	*2412.00	95.1 AV			1.18 V	326	63.31	31.79
5	4824.00	44.8 PK	74.0	-29.2	1.29 V	100	4.62	40.18
6	4824.00	34.8 AV	54.0	-19.2	1.29 V	100	-5.38	40.18

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	19deg. C, 70%RH 1012 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	108.4 PK			1.11 H	49	76.54	31.86
2	*2437.00	98.8 AV			1.11 H	49	66.94	31.86
3	4874.00	44.6 PK	74.0	-29.4	1.23 H	84	4.22	40.38
4	4874.00	34.7 AV	54.0	-19.3	1.23 H	84	-5.68	40.38
5	7311.00	48.6 PK	74.0	-25.4	1.11 H	78	3.56	45.04
6	7311.00	39.1 AV	54.0	-14.9	1.11 H	78	-5.94	45.04
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.9 PK			1.19 V	340	72.04	31.86
2	*2437.00	94.8 AV			1.19 V	340	62.94	31.86
3	4874.00	44.8 PK	74.0	-29.2	1.30 V	90	4.42	40.38
4	4874.00	34.6 AV	54.0	-19.4	1.30 V	90	-5.78	40.38
5	7311.00	48.9 PK	74.0	-25.1	1.14 V	101	3.86	45.04
6	7311.00	40.2 AV	54.0	-13.8	1.14 V	101	-4.84	45.04

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	19deg. C, 70%RH 1012 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.6 PK			1.35 H	243	74.67	31.93
2	*2462.00	97.0 AV			1.35 H	243	65.07	31.93
3	2483.50	67.3 PK	74.0	-6.7	1.33 H	240	35.31	31.99
4	2483.50	51.6 AV	54.0	-2.4	1.33 H	240	19.61	31.99
5	4924.00	44.8 PK	74.0	-29.2	1.69 H	100	4.22	40.58
6	4924.00	34.2 AV	54.0	-19.8	1.69 H	100	-6.38	40.58
7	7386.00	49.2 PK	74.0	-24.8	1.45 H	95	4.08	45.12
8	7386.00	38.5 AV	54.0	-15.5	1.45 H	95	-6.62	45.12

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M



NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.9 PK			1.21 V	33	70.97	31.93
2	*2462.00	93.5 AV			1.21 V	33	61.57	31.93
3	2483.50	67.2 PK	74.0	-6.8	1.22 V	350	35.21	31.99
4	2483.50	49.4 AV	54.0	-4.6	1.22 V	350	17.41	31.99
5	4924.00	45.1 PK	74.0	-28.9	1.70 V	101	4.52	40.58
6	4924.00	34.5 AV	54.0	-19.5	1.70 V	101	-6.08	40.58
7	7386.00	49.3 PK	74.0	-24.7	1.50 V	140	4.18	45.12
8	7386.00	38.3 AV	54.0	-15.7	1.50 V	140	-6.82	45.12

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T



RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH1, HORIZONTAL)

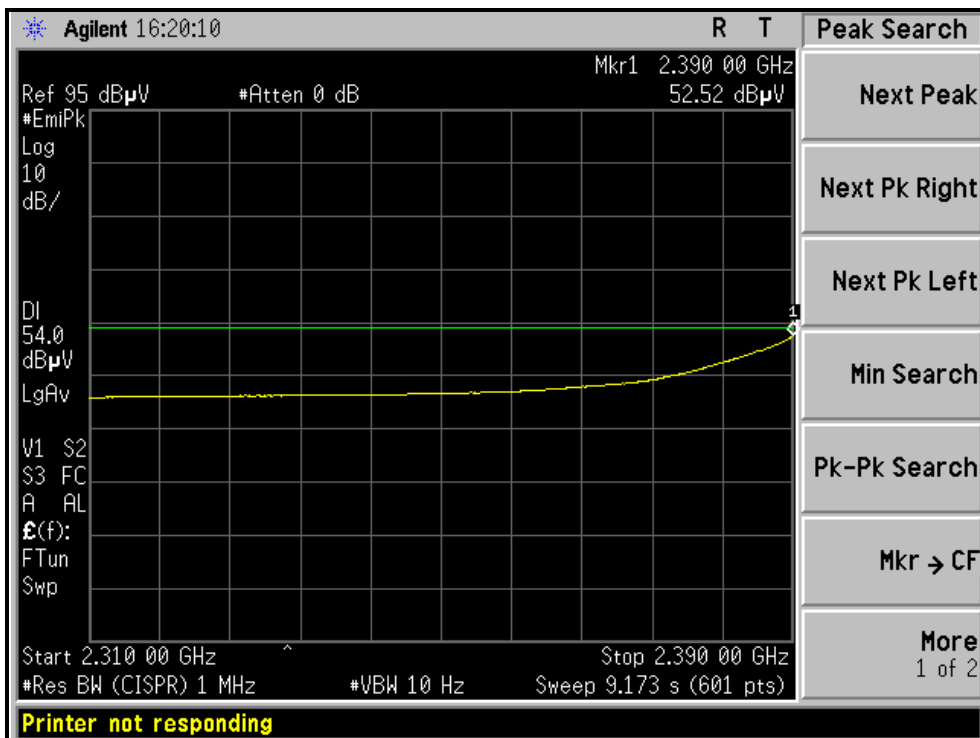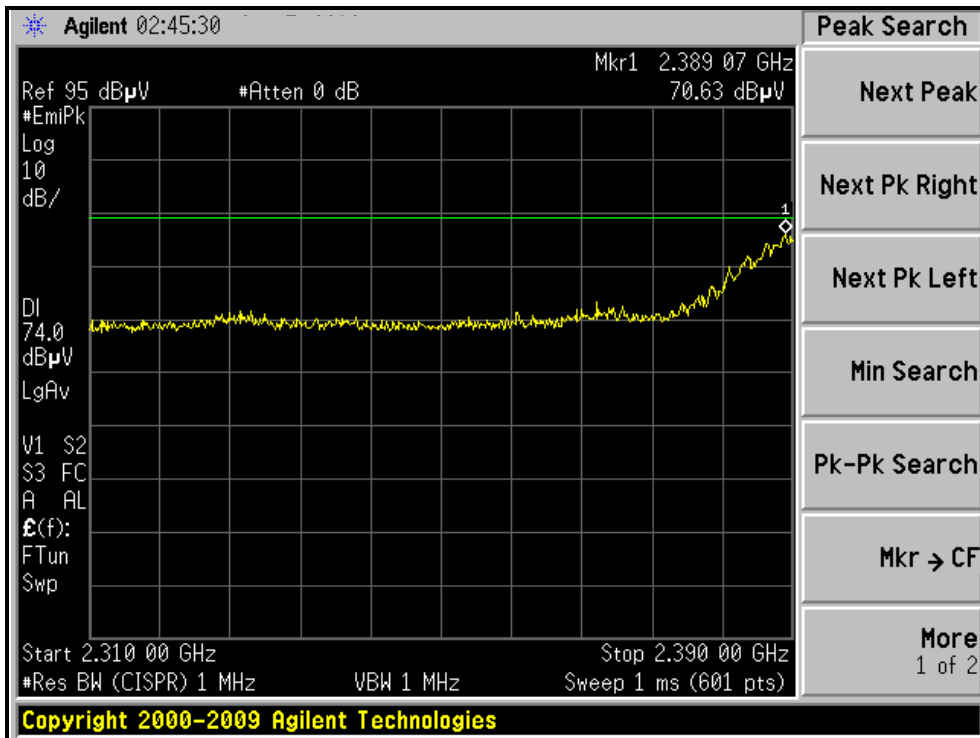



A D T



RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH1, VERTICAL)

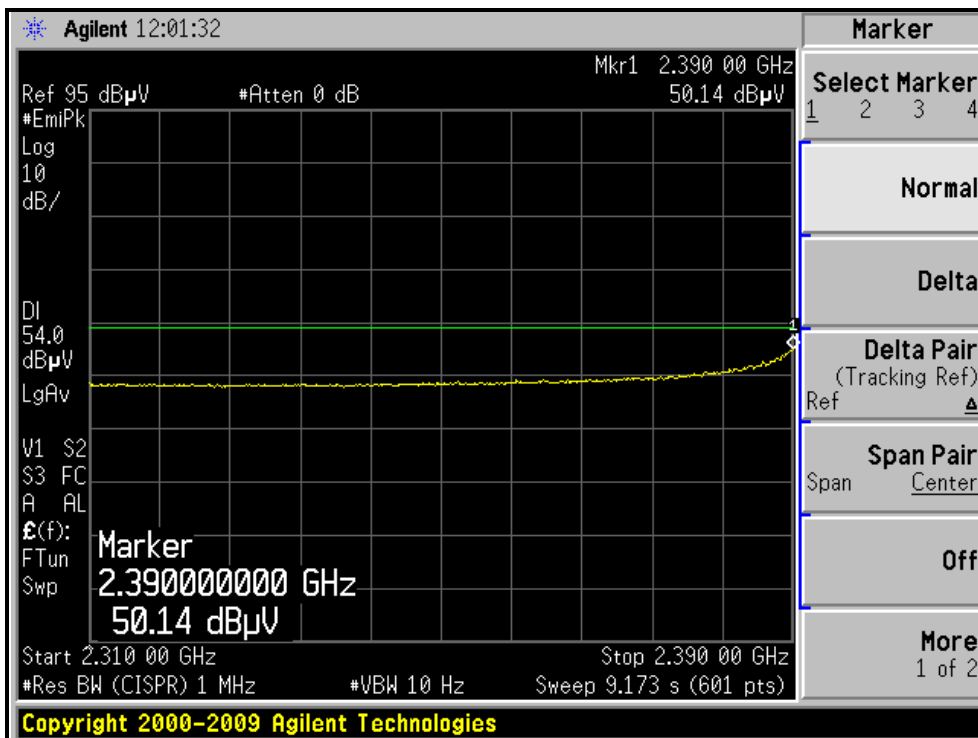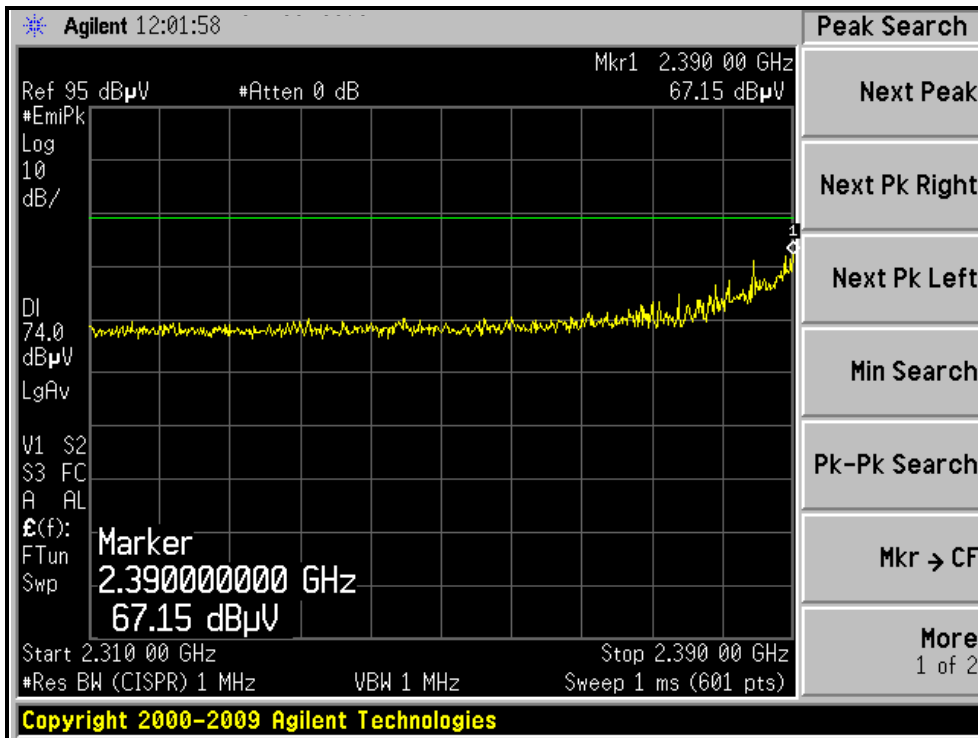



A D T



RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH11, HORIZONTAL)

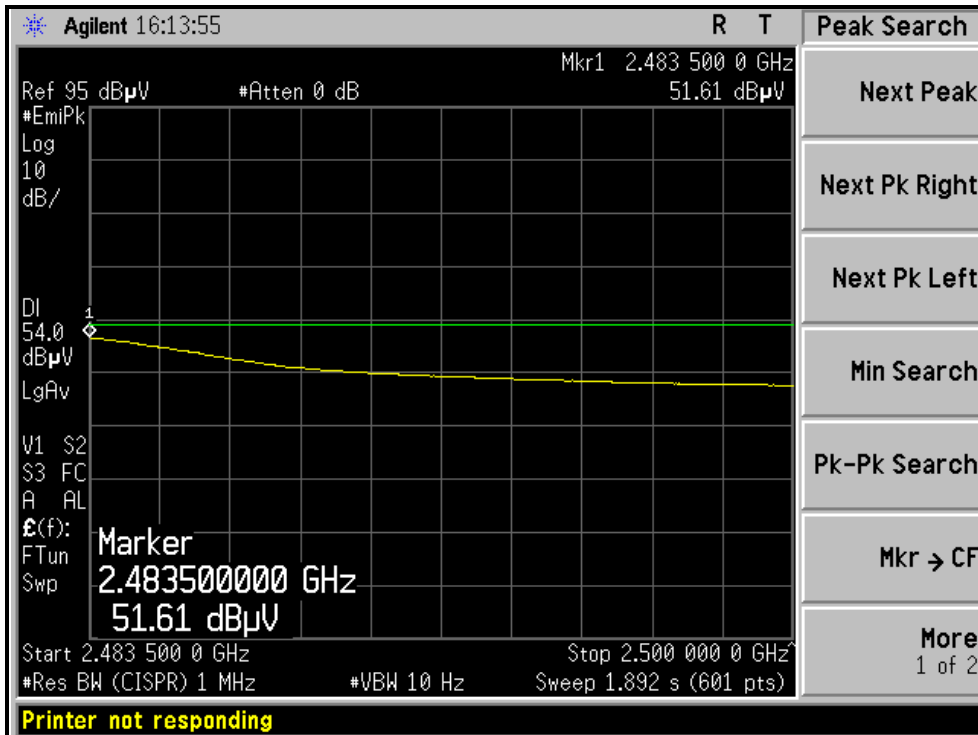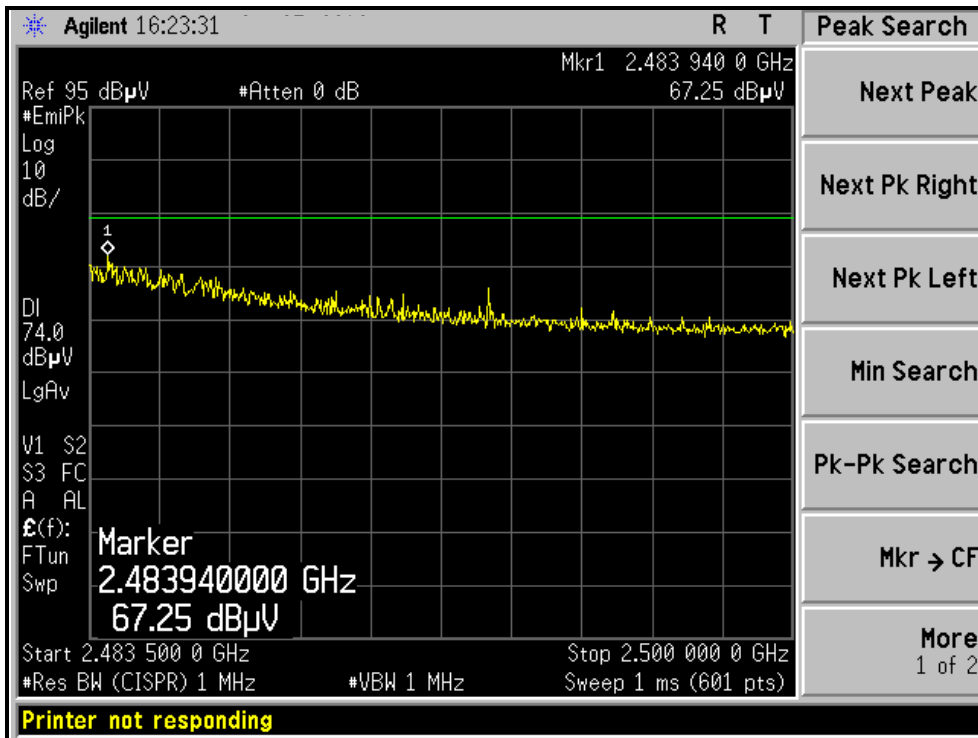



A D T

RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH11, VERTICAL)

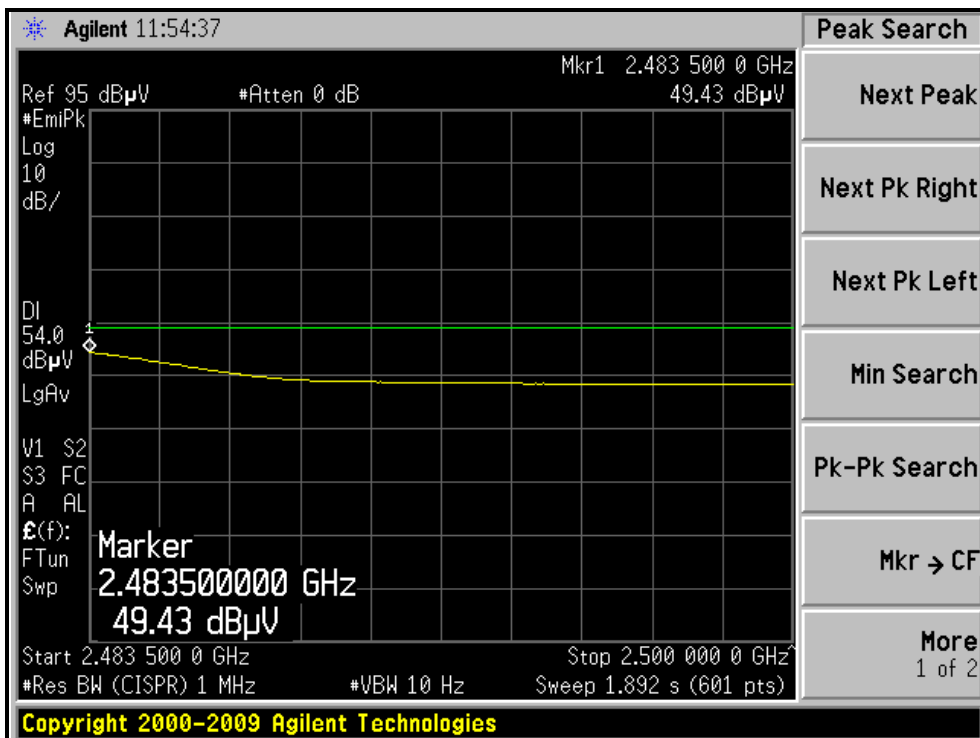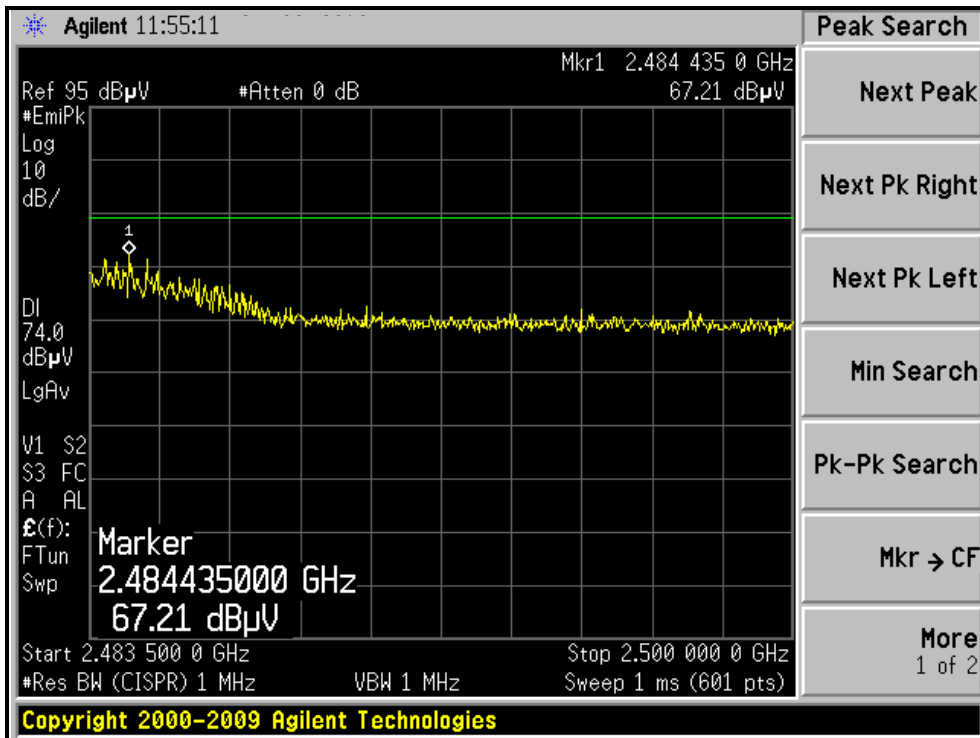



A D T

802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	19deg. C, 70%RH 1012 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.8 PK	74.0	-6.2	1.44 H	360	36.18	31.62
2	2390.00	51.6 AV	54.0	-2.4	1.44 H	360	19.98	31.62
3	*2422.00	105.0 PK			1.39 H	250	73.26	31.74
4	*2422.00	93.8 AV			1.39 H	250	62.06	31.74
5	4844.00	43.6 PK	74.0	-30.4	1.28 H	67	5.76	37.84
6	4844.00	34.0 AV	54.0	-20.0	1.28 H	67	-3.84	37.84
7	7266.00	43.3 PK	74.0	-30.7	1.11 H	71	-1.86	45.16
8	7266.00	38.5 AV	54.0	-15.5	1.11 H	71	-6.66	45.16
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.7 PK	74.0	-9.3	1.32 V	305	33.08	31.62
2	2390.00	49.0 AV	54.0	-5.0	1.32 V	305	17.38	31.62
3	*2422.00	99.9 PK			1.11 V	69	68.16	31.74
4	*2422.00	89.5 AV			1.11 V	69	57.76	31.74
5	4844.00	43.9 PK	74.0	-30.1	1.33 V	69	6.06	37.84
6	4844.00	34.4 AV	54.0	-19.6	1.33 V	69	-3.44	37.84
7	7266.00	44.3 PK	74.0	-29.7	1.21 V	100	-0.86	45.16
8	7266.00	38.7 AV	54.0	-15.3	1.21 V	100	-6.46	45.16

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	19deg. C, 70%RH 1012 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	105.6 PK			1.44 H	266	73.74	31.86
2	*2437.00	94.6 AV			1.44 H	266	62.74	31.86
3	4874.00	43.6 PK	74.0	-30.4	1.40 H	71	3.22	40.38
4	4874.00	34.7 AV	54.0	-19.3	1.40 H	71	-5.68	40.38
5	7311.00	43.1 PK	74.0	-30.9	1.20 H	69	-1.94	45.04
6	7311.00	38.6 AV	54.0	-15.4	1.20 H	69	-6.44	45.04
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	100.2 PK			1.19 V	308	68.34	31.86
2	*2437.00	90.3 AV			1.19 V	308	58.44	31.86
3	4874.00	44.2 PK	74.0	-29.8	1.20 V	140	3.82	40.38
4	4874.00	34.6 AV	54.0	-19.4	1.20 V	140	-5.78	40.38
5	7311.00	44.8 PK	74.0	-29.2	1.11 V	115	-0.24	45.04
6	7311.00	38.9 AV	54.0	-15.1	1.11 V	115	-6.14	45.04

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	19deg. C, 70%RH 1012 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	102.8 PK			1.33 H	244	70.90	31.90
2	*2452.00	92.7 AV			1.33 H	244	60.80	31.90
3	2483.50	71.0 PK	74.0	-3.0	1.35 H	260	39.01	31.99
4	2483.50	51.8 AV	54.0	-2.2	1.35 H	260	19.81	31.99
5	4904.00	44.8 PK	74.0	-29.2	1.14 H	83	4.30	40.50
6	4904.00	34.8 AV	54.0	-19.2	1.14 H	83	-5.70	40.50
7	7356.00	43.7 PK	74.0	-30.3	1.15 H	99	-1.39	45.09
8	7356.00	38.3 AV	54.0	-15.7	1.15 H	99	-6.79	45.09

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M



NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	98.6 PK			1.19 V	333	66.70	31.90
2	*2452.00	88.9 AV			1.19 V	333	57.00	31.90
3	2483.50	68.1 PK	74.0	-5.9	1.21 V	333	36.11	31.99
4	2483.50	49.3 AV	54.0	-4.7	1.21 V	333	17.31	31.99
5	4904.00	43.7 PK	74.0	-30.3	1.10 V	307	3.20	40.50
6	4904.00	34.1 AV	54.0	-19.9	1.10 V	307	-6.40	40.50
7	7356.00	43.1 PK	74.0	-30.9	1.08 V	69	-1.99	45.09
8	7356.00	38.1 AV	54.0	-15.9	1.08 V	69	-6.99	45.09

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T



RESTRICTED BANDEDGE (802.11n (40MHz) MODE, CH1, HORIZONTAL)

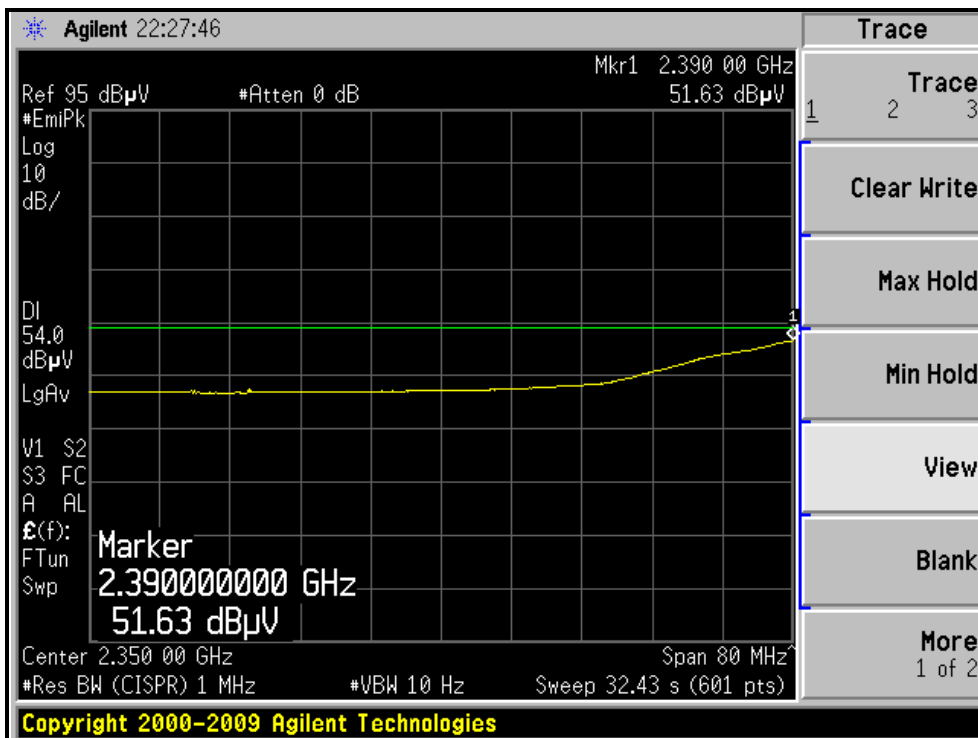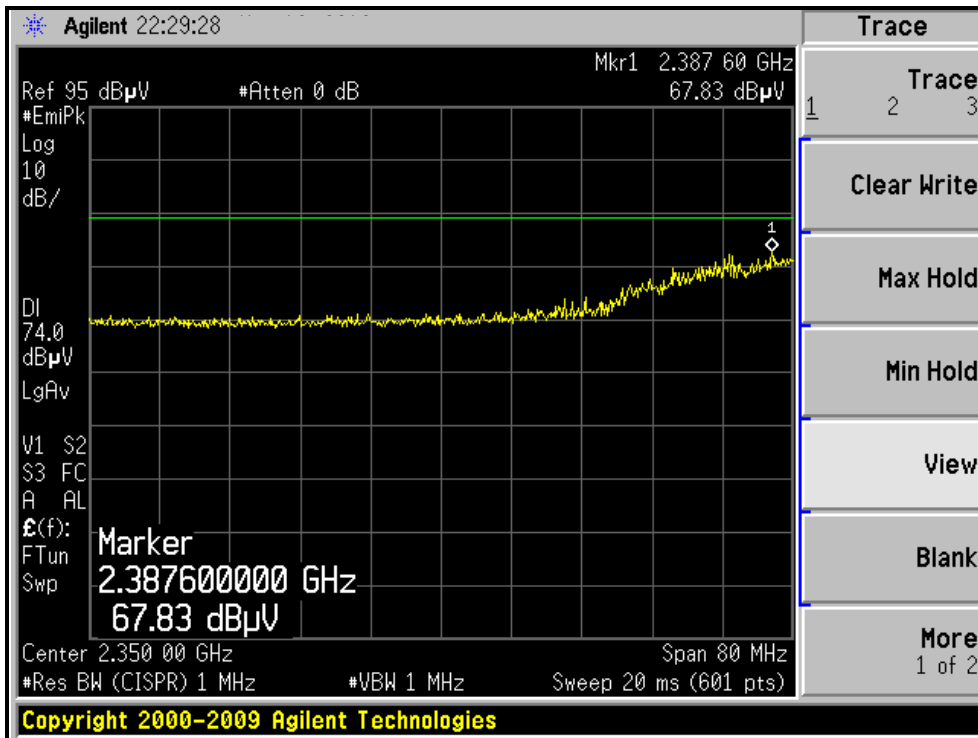



A D T



RESTRICTED BANDEDGE (802.11n (40MHz) MODE, CH1, VERTICAL)

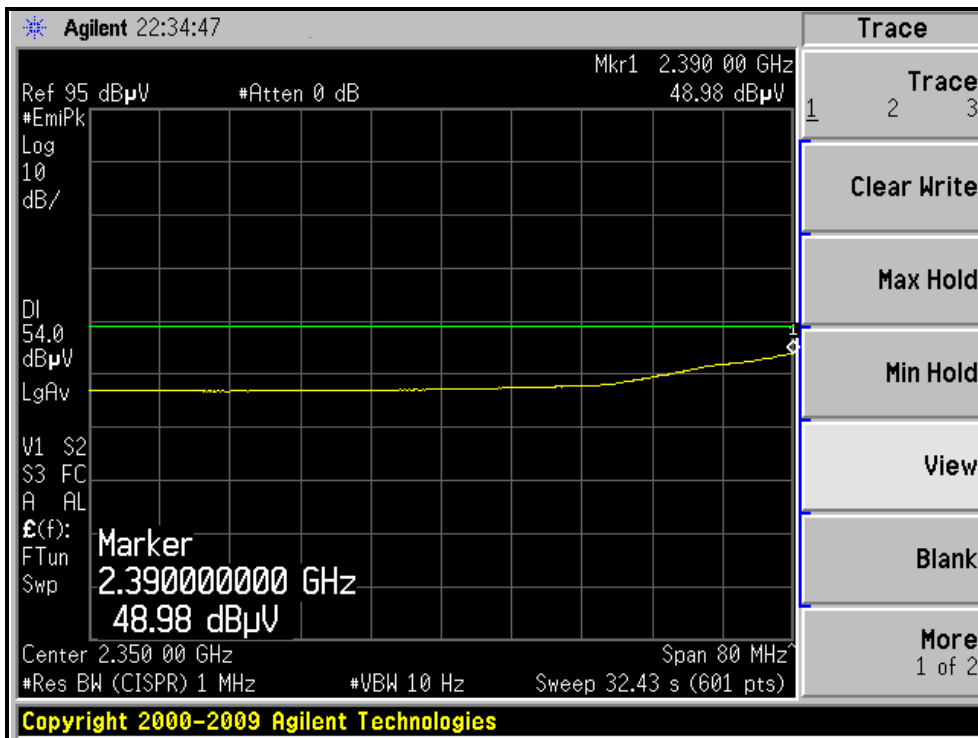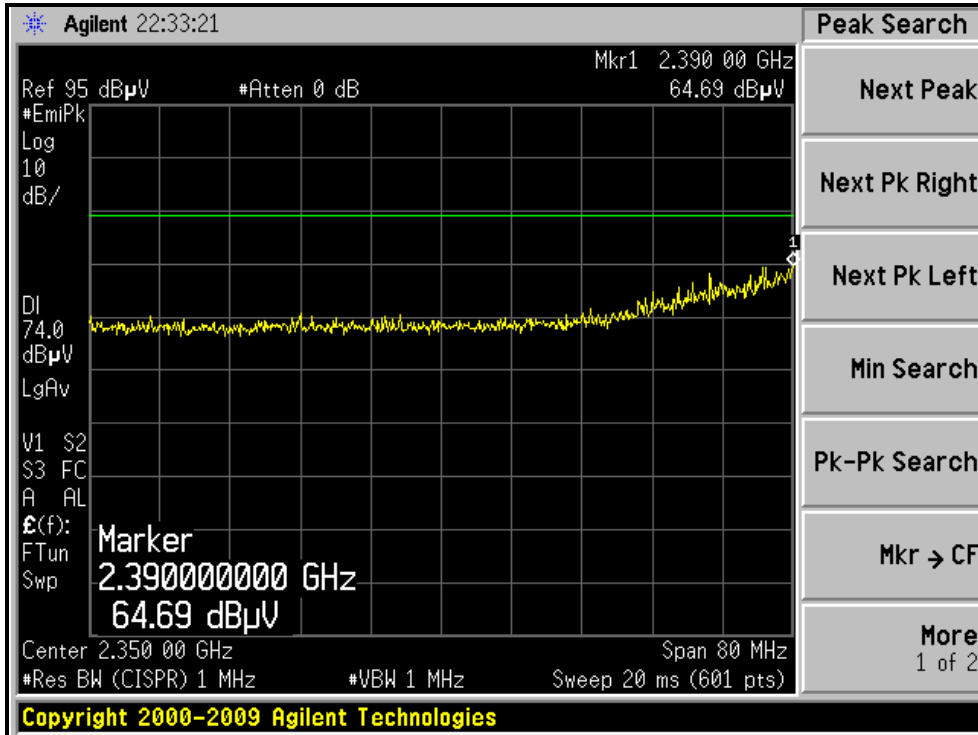



A D T



RESTRICTED BANDEDGE (802.11n (40MHz) MODE, CH7, HORIZONTAL)

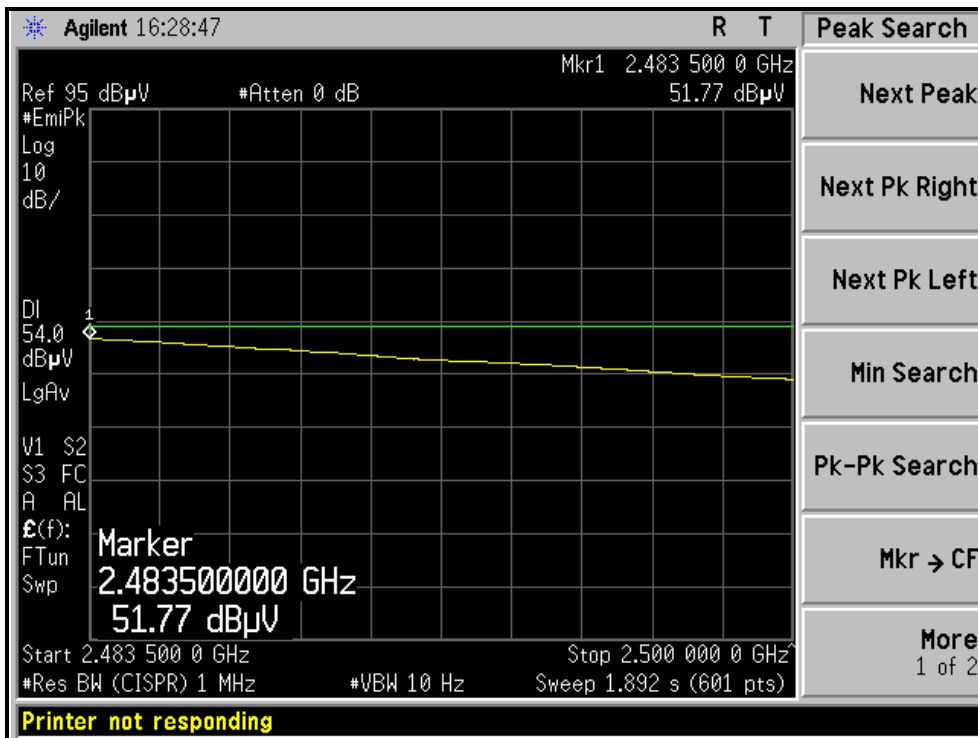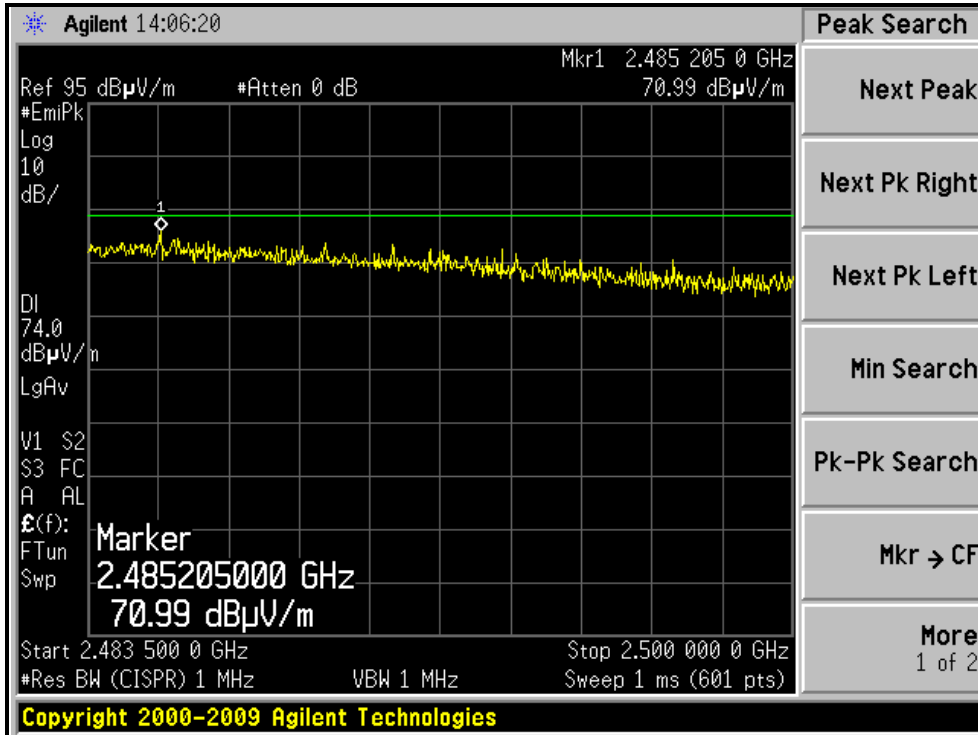



A D T

RESTRICTED BANDEDGE (802.11n (40MHz) MODE, CH7, VERTICAL)

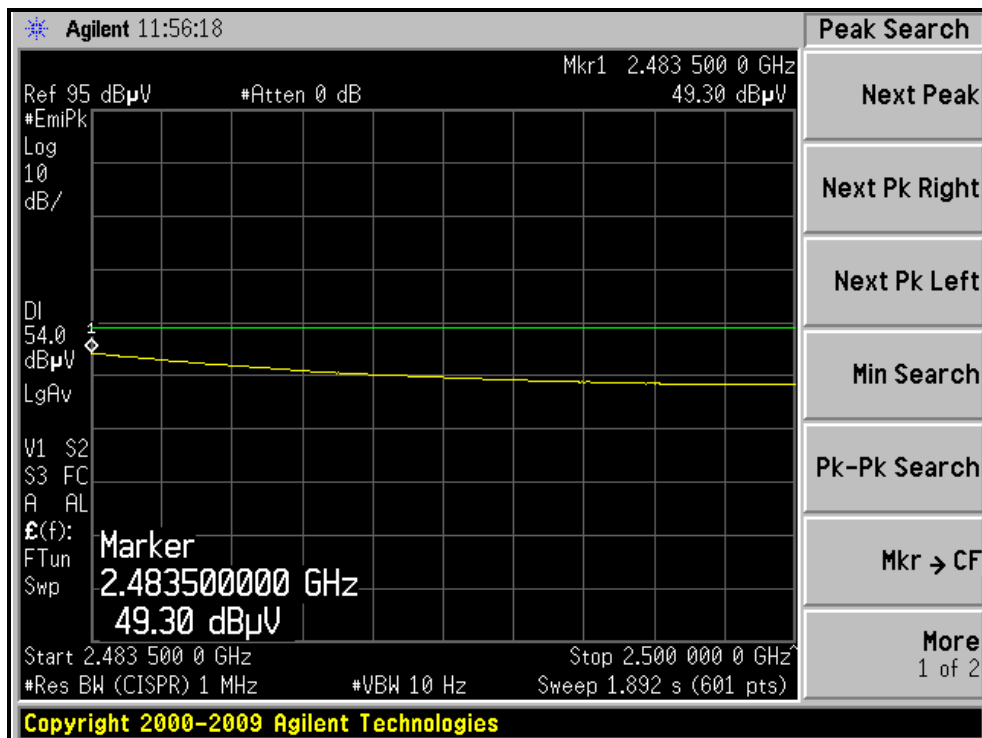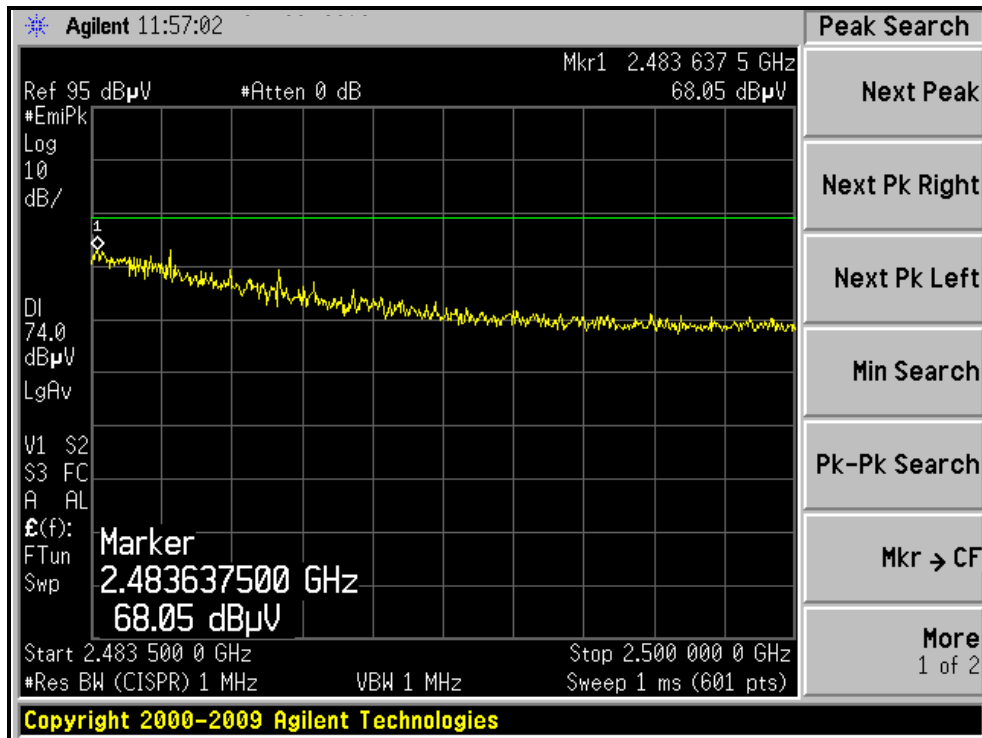

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 18, 2009	Dec. 17, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS

802.11b DSSS MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	11.68	0.5	PASS
6	2437	12.54	0.5	PASS
11	2462	12.64	0.5	PASS

CH11

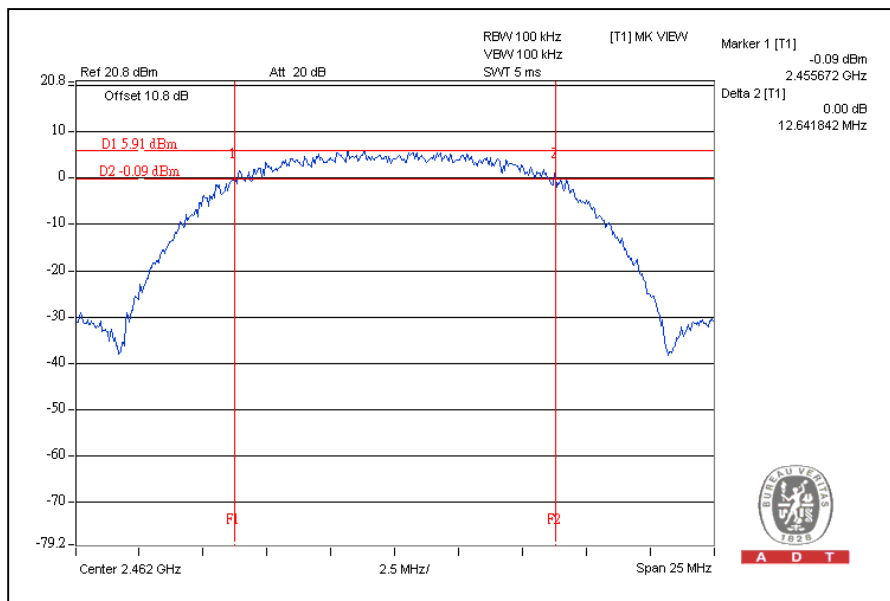




A D T

802.11g OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.43	0.5	PASS
6	2437	16.43	0.5	PASS
11	2462	16.44	0.5	PASS

CH11

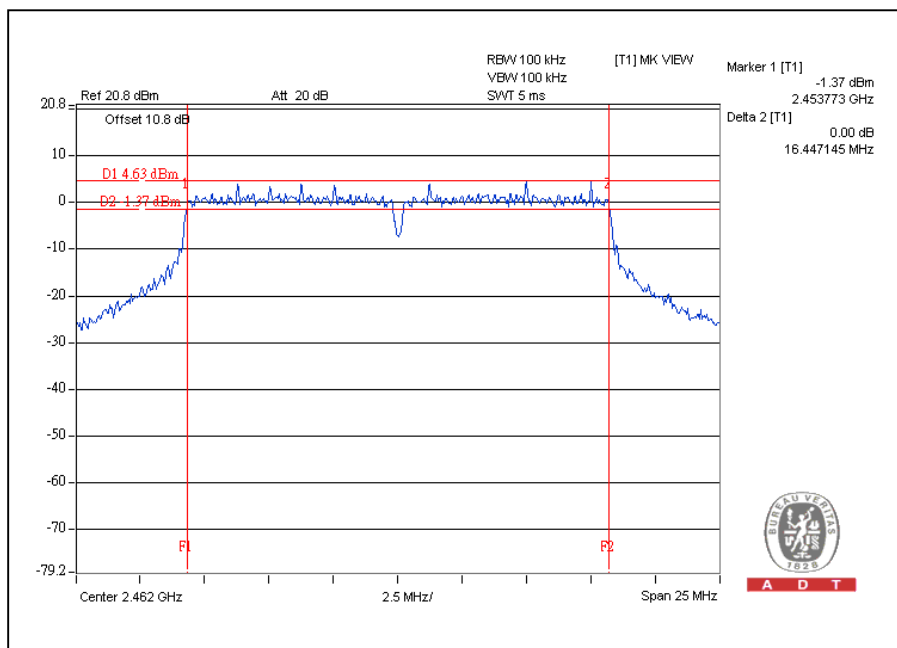




A D T

802.11n (20MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.69	0.5	PASS
6	2437	17.71	0.5	PASS
11	2462	17.66	0.5	PASS

CH6

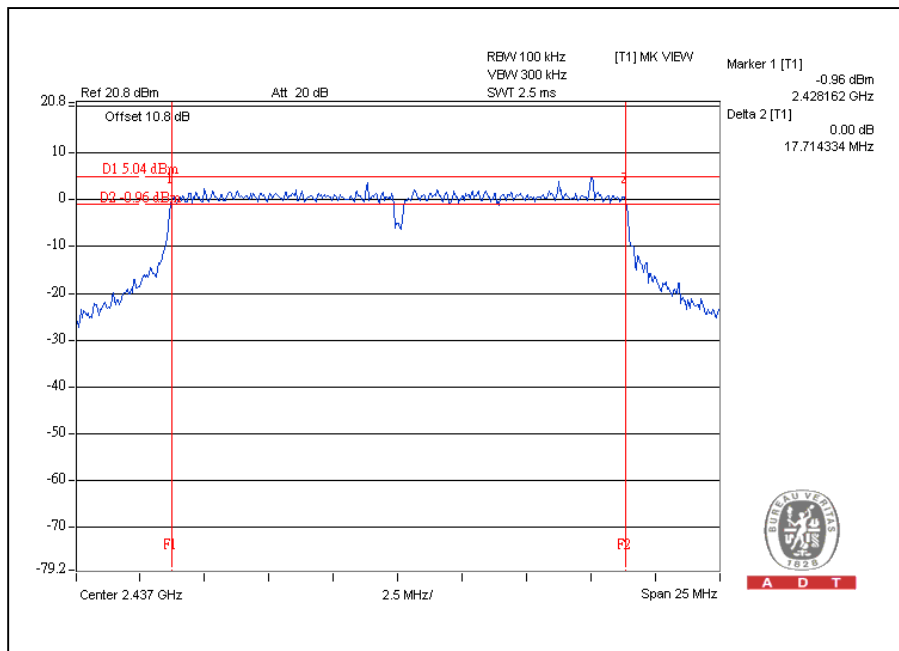




A D T

802.11n (40MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2422	36.47	0.5	PASS
4	2437	36.44	0.5	PASS
7	2452	36.44	0.5	PASS

CH1

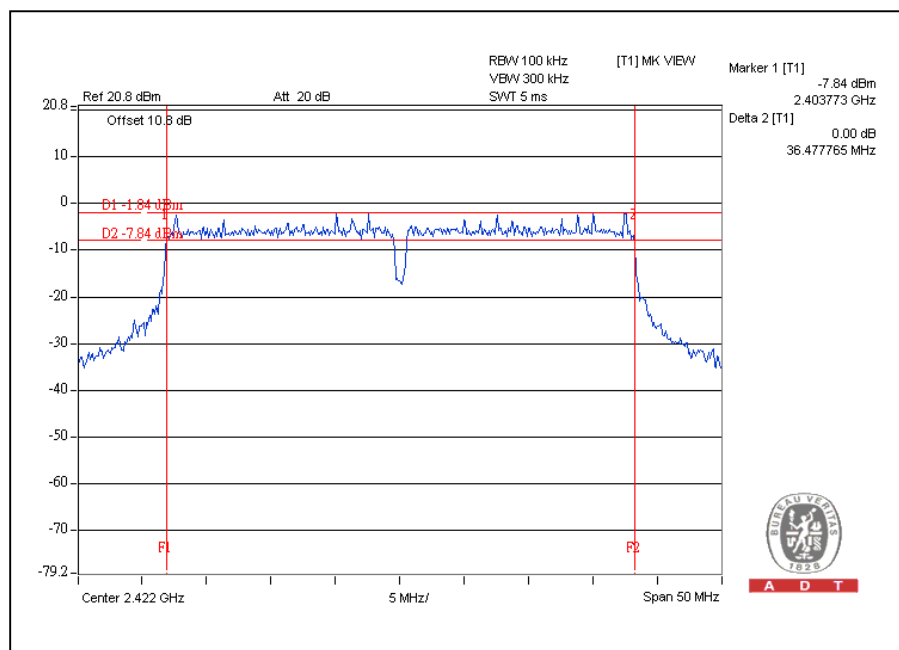

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Peak Power Meter	ML2495A	0824006	May 04, 2010	May 03, 2011
Power Sensor	MA2411B	0738172	May 04, 2010	May 03, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

1. The transmitter output was connected to the power meter through an attenuator; the bandwidth of the fundamental frequency was measured with the power meter.
2. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

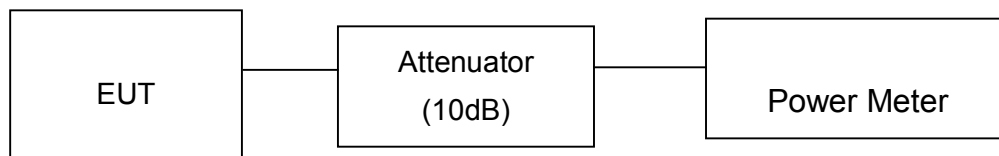

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



A D T

4.4.7 TEST RESULTS

802.11b DSSS MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	112.2	20.5	30	PASS
6	2437	107.2	20.3	30	PASS
11	2462	109.6	20.4	30	PASS

802.11g OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	288.4	24.6	30	PASS
6	2437	281.8	24.5	30	PASS
11	2462	245.5	23.9	30	PASS

802.11n (20MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	269.2	24.3	30	PASS
6	2437	269.2	24.3	30	PASS
11	2462	218.8	23.4	30	PASS

802.11n (40MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2422	257.0	24.1	30	PASS
4	2437	257.0	24.1	30	PASS
7	2452	134.9	21.3	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 18, 2009	Dec. 17, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

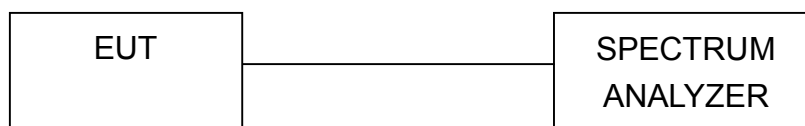

4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6




A D T

4.5.7 TEST RESULTS

802.11b DSSS MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2412	-7.3	8	PASS
6	2437	-6.5	8	PASS
11	2462	-7.8	8	PASS

CH6

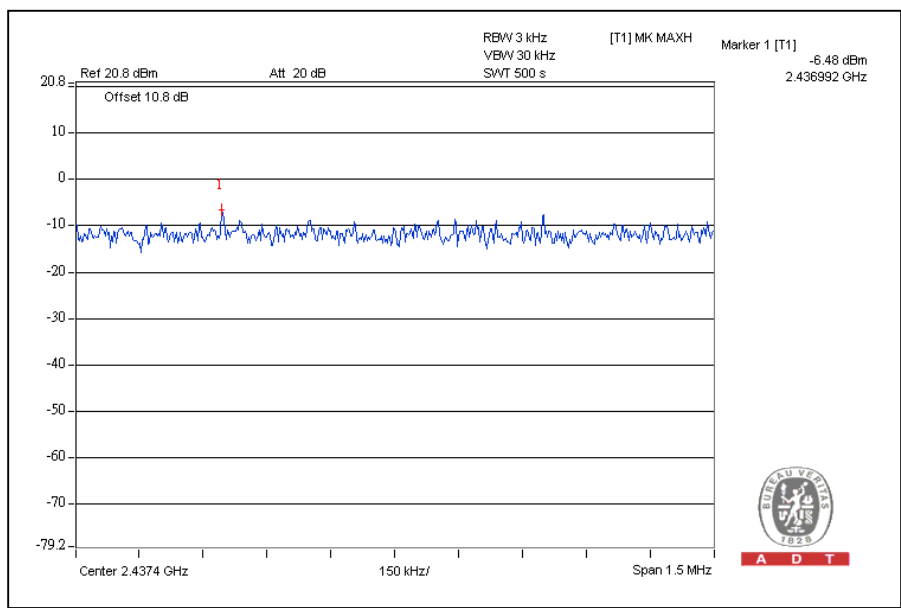




A D T

802.11g OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2412	-7.7	8	PASS
6	2437	-9.2	8	PASS
11	2462	-9.2	8	PASS

CH1

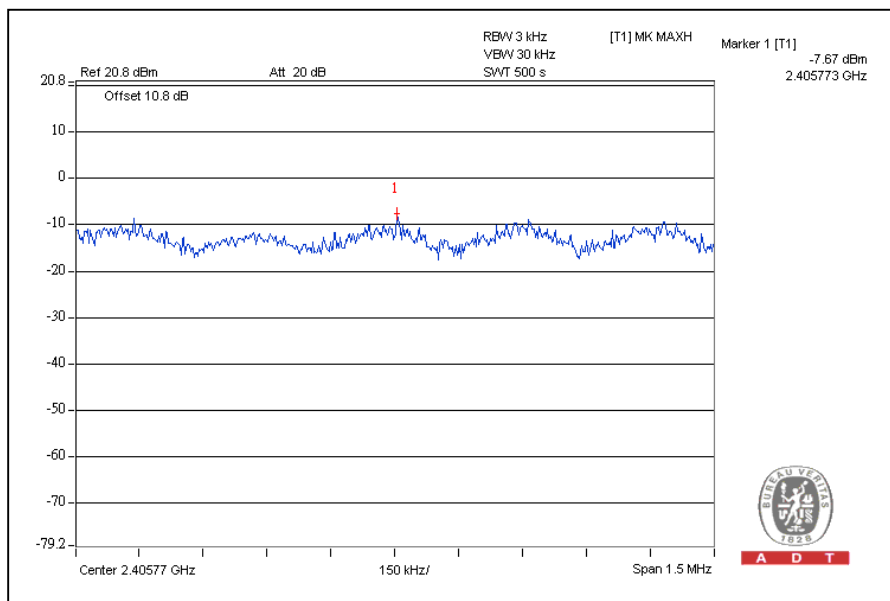




A D T

802.11n (20MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2412	-9.7	8	PASS
6	2437	-9.7	8	PASS
11	2462	-9.8	8	PASS

CH1

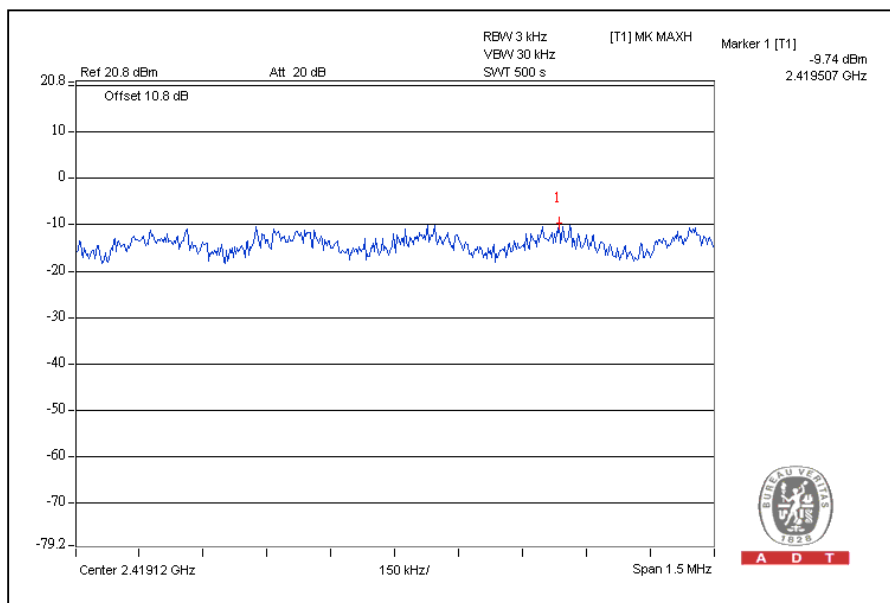




A D T

802.11n (40MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2422	-16.1	8	PASS
4	2437	-13.3	8	PASS
7	2452	-16.3	8	PASS

CH4

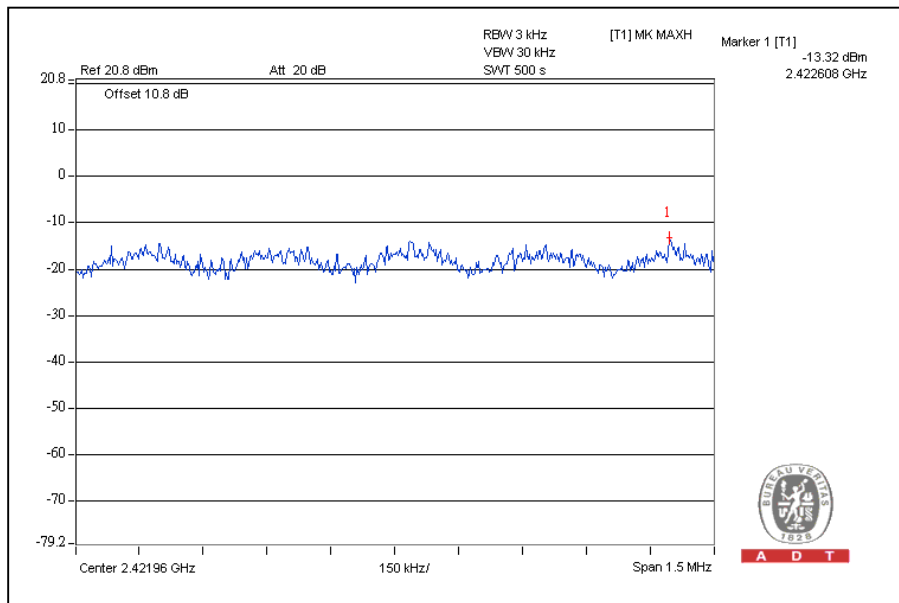

4.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 18, 2009	Dec. 17, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set RBW of spectrum analyzer to 100kHz and VBW of spectrum analyzer to 300kHz with suitable frequency span including 100MHz or 200MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (RBW = 100kHz, VBW = 300kHz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION


Same as Item 4.3.6

4.6.6 TEST RESULTS


The spectrum plots are attached on the following images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS MODULATION:

CH1

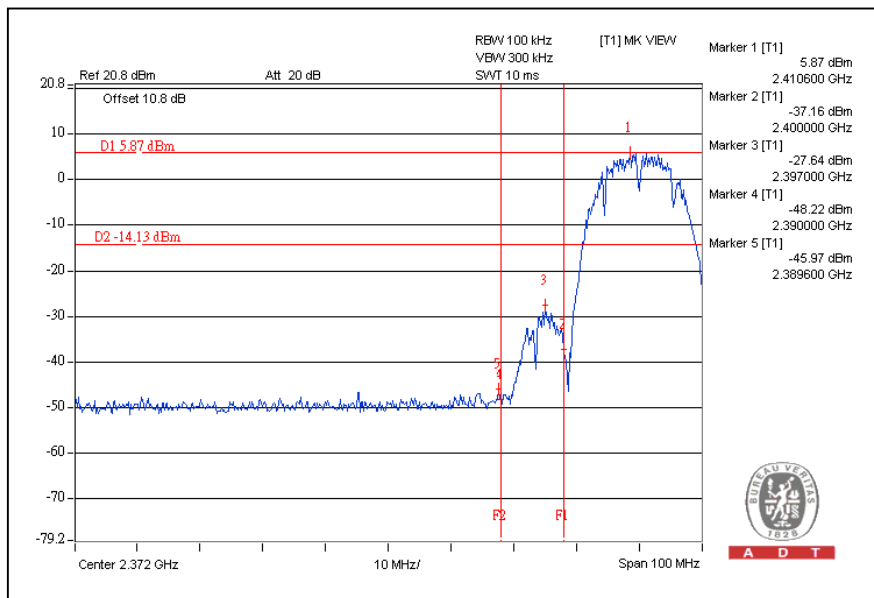


CH11

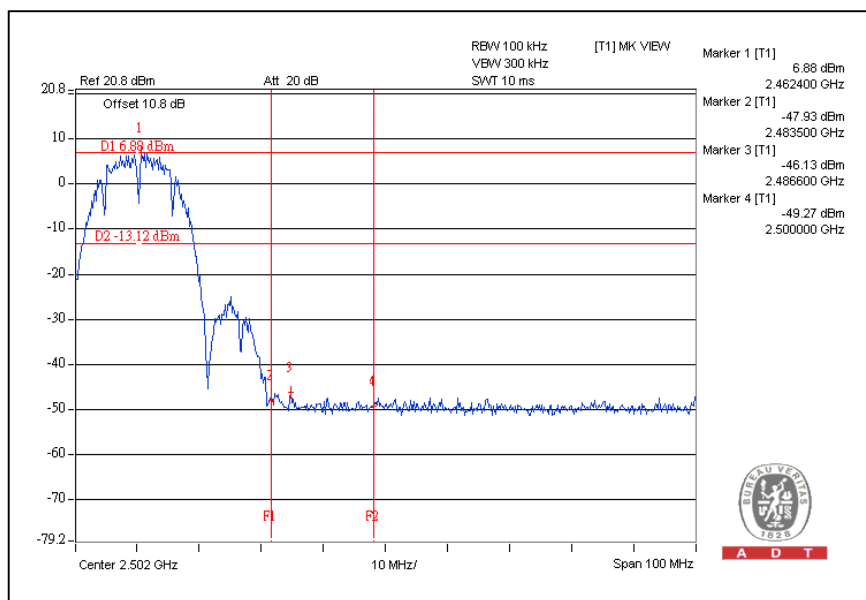




A D T

CH1

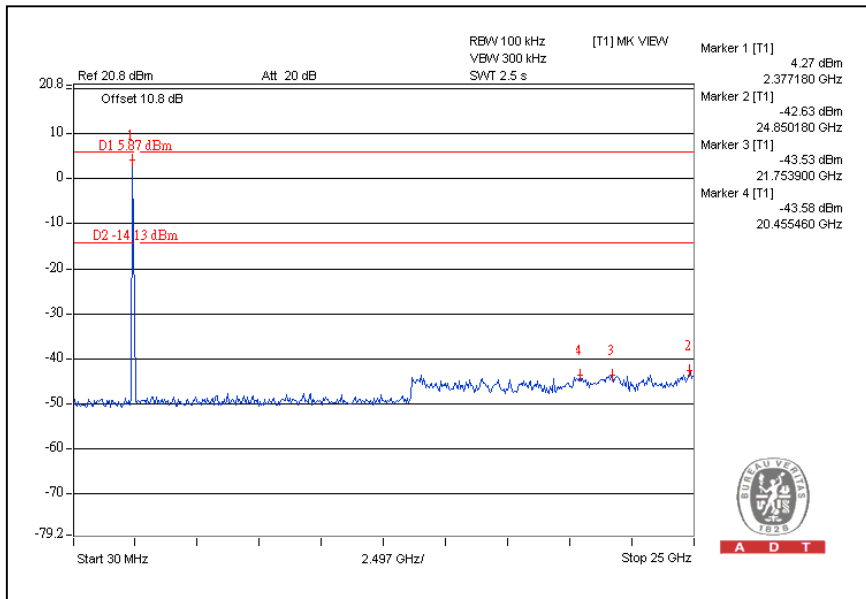


CH11

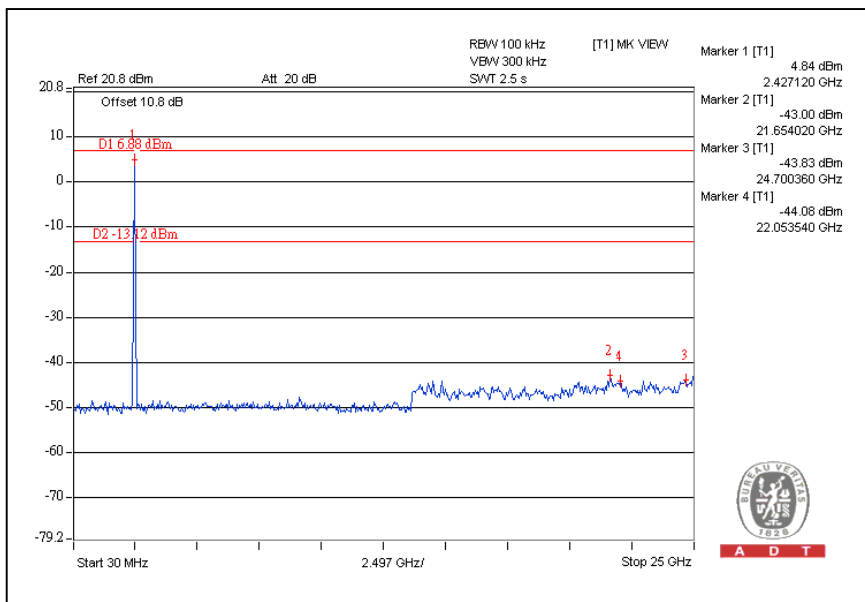


802.11g OFDM MODULATION:

CH1

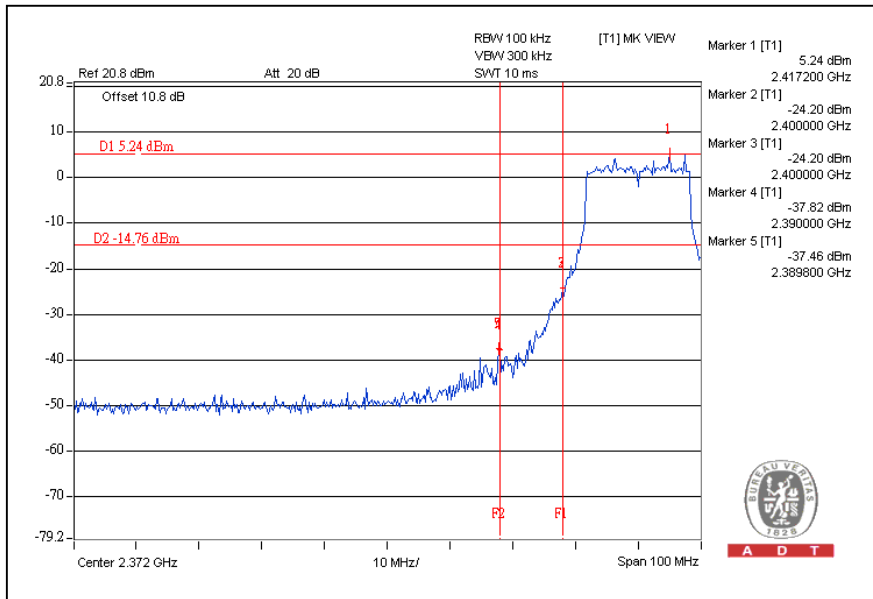


CH11

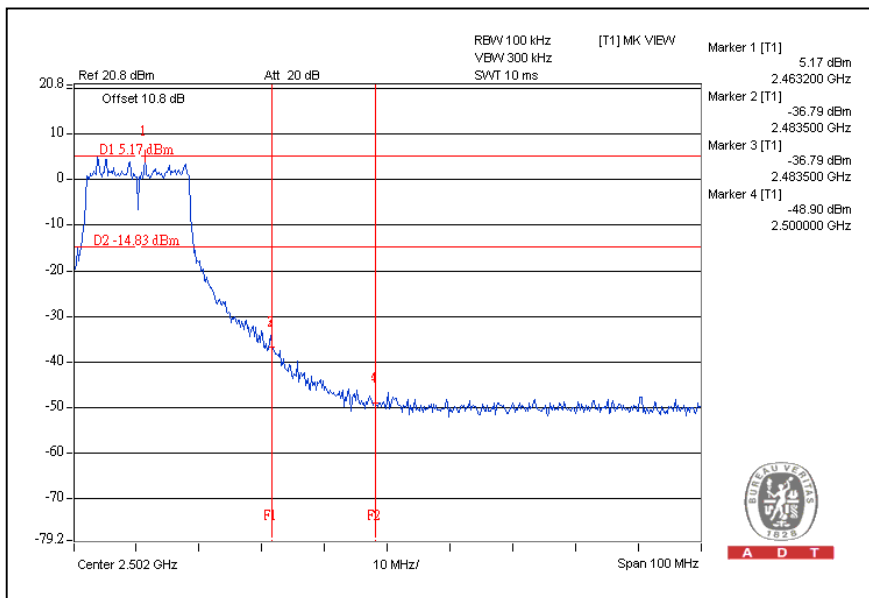




A D T

CH1

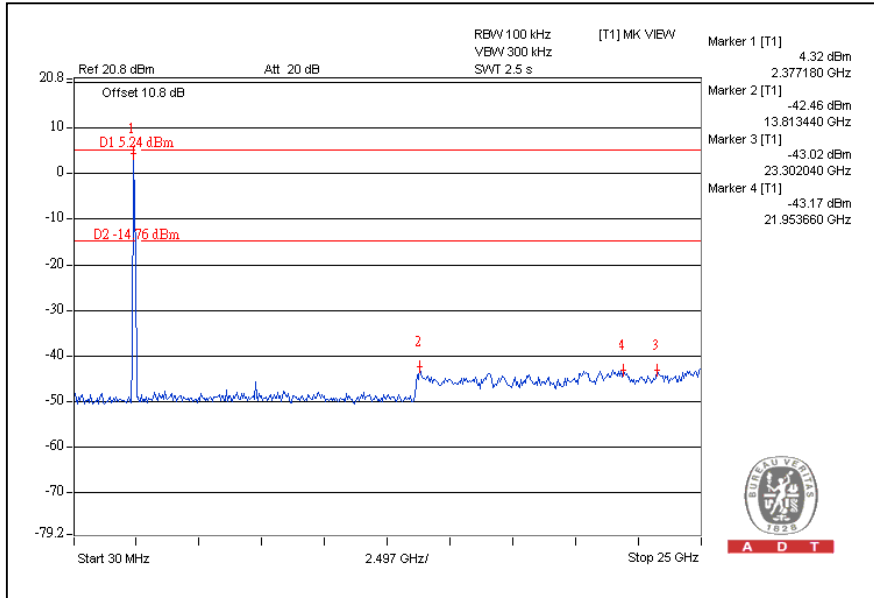


CH11

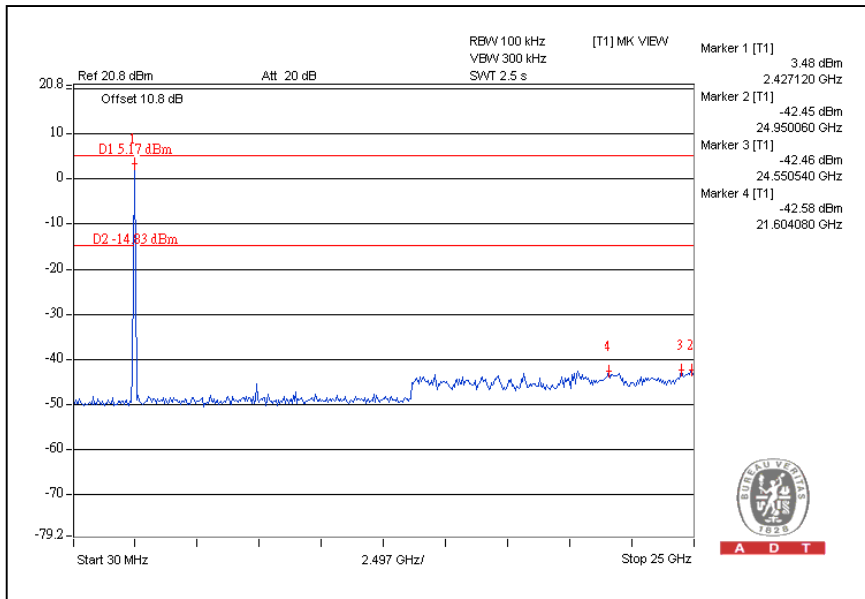


802.11n (20MHz) OFDM MODULATION:

CH1

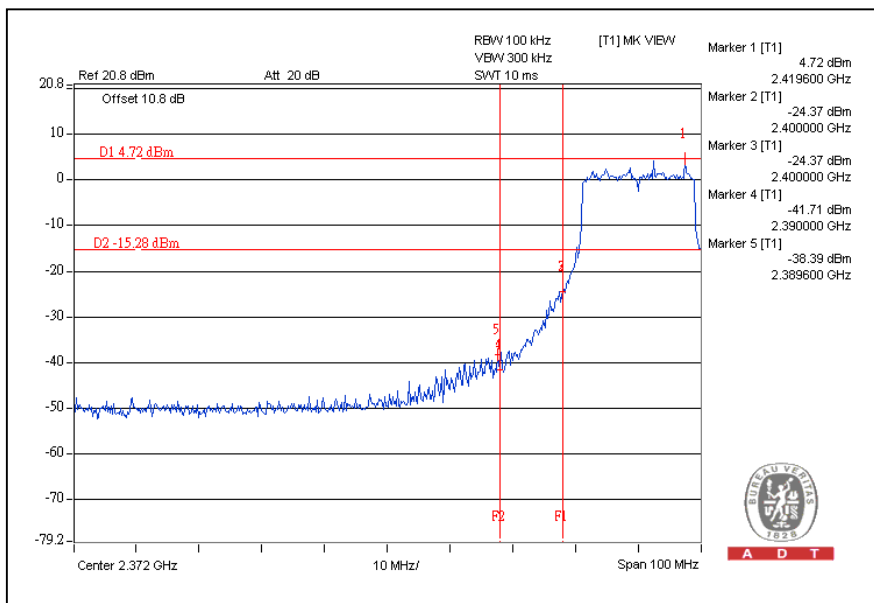


CH11

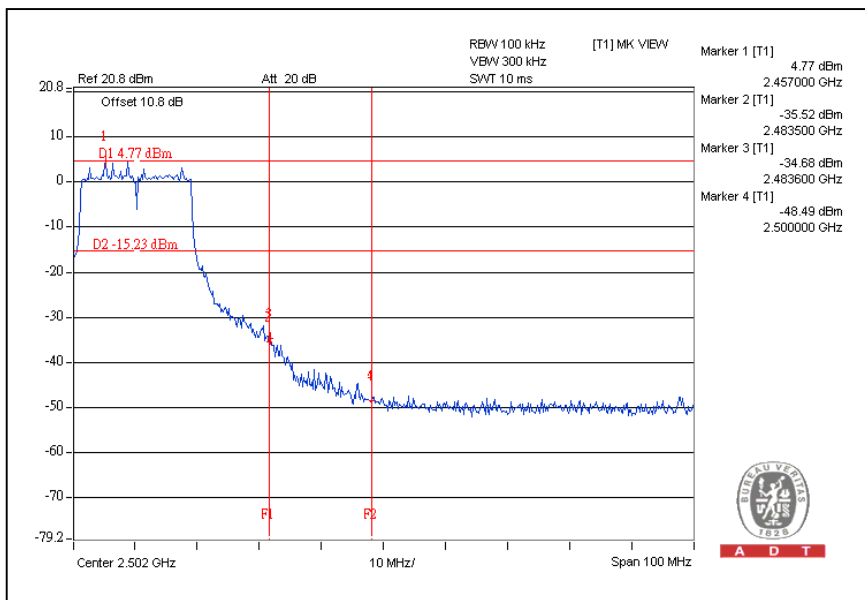




A D T

CH1

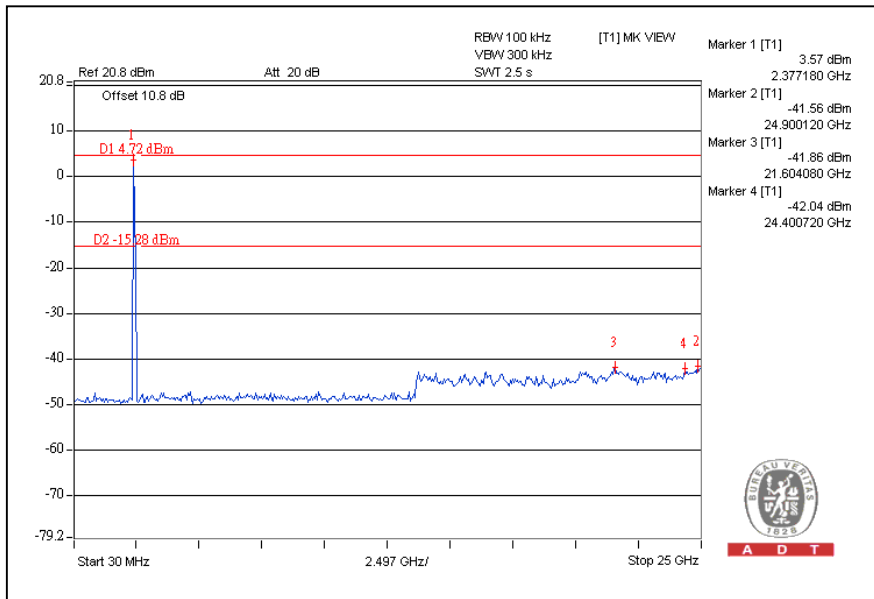


CH11

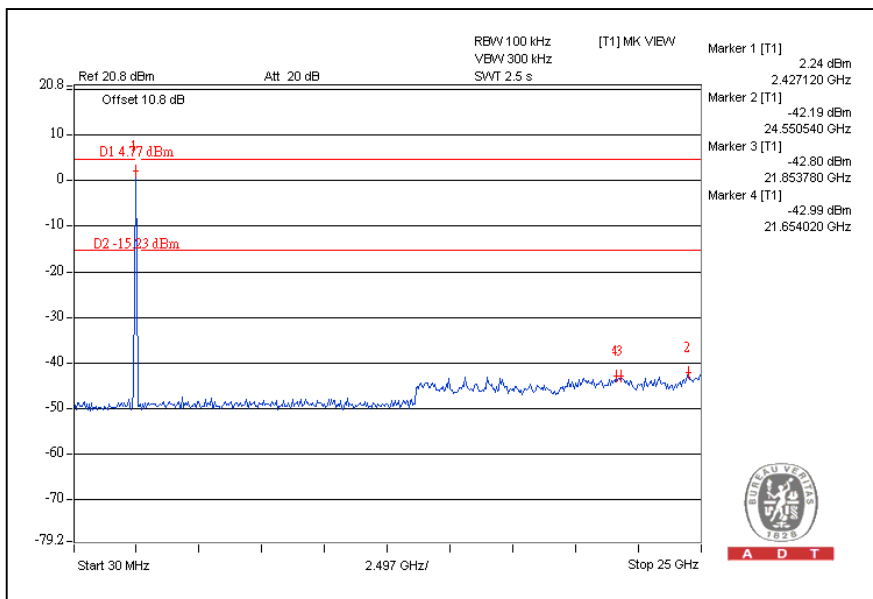


802.11n (40MHz) OFDM MODULATION:

CH1

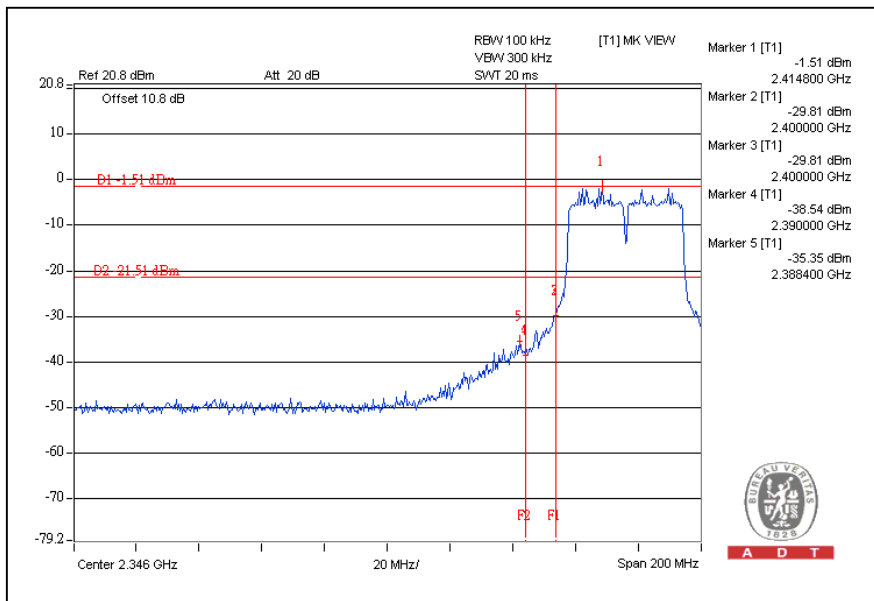


CH7

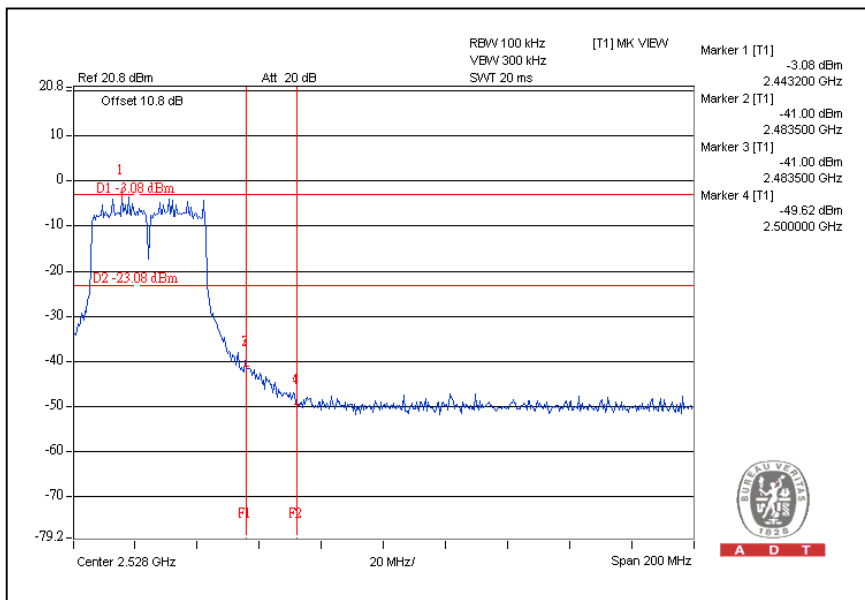




A D T

CH1

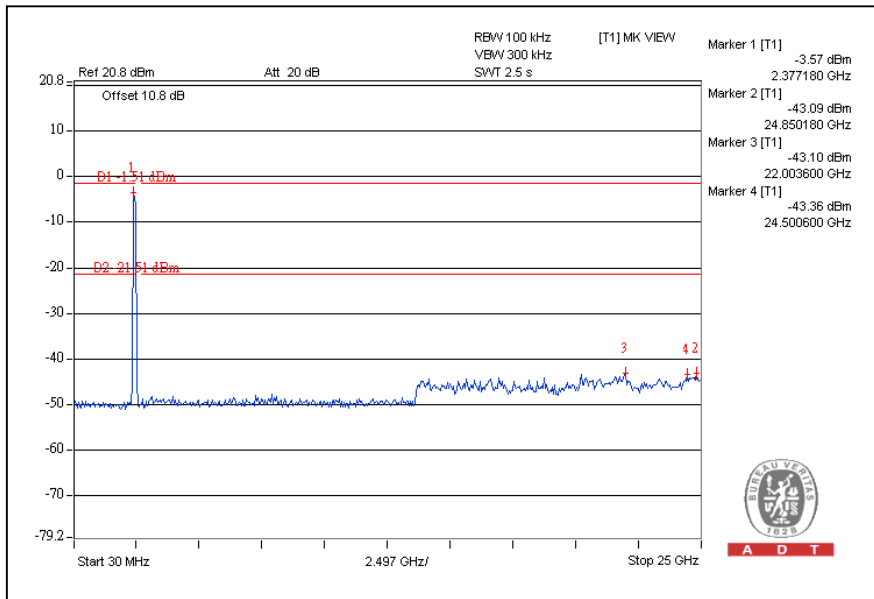

CH7

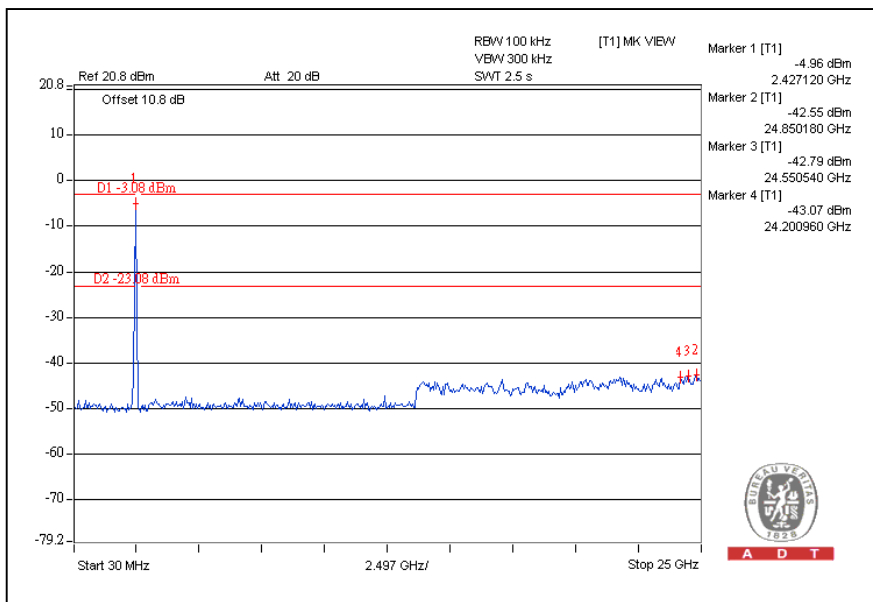



A D T

5. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Email: service@adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

6. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- END ---