



FCC TEST REPORT (15.247)

REPORT NO.: RF120309C34

MODEL NO.: ZoneFlex 7321

FCC ID: S9GZF7321

RECEIVED: Mar. 09, 2012

TESTED: Mar. 21 ~ Apr. 16, 2012

ISSUED: Apr. 17, 2012

APPLICANT: Ruckus Wireless, Inc.

ADDRESS: 880 West Maude Ave. Suite 101, Sunnyvale,
California, United States, 94085

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,
New Taipei City, Taiwan (R.O.C.)

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 83 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval or endorsement by TAF or any government agency. The test results in the report only apply to the tested sample.





A D T

TABLE OF CONTENTS

RELEASE CONTROL RECORD	5
1. CERTIFICATION.....	6
2. SUMMARY OF TEST RESULTS	7
2.1 MEASUREMENT UNCERTAINTY.....	7
3. GENERAL INFORMATION.....	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.2.1 DESCRIPTION OF SUPPORT UNITS	11
3.2.2 CONFIGURATION OF SYSTEM UNDER TEST	12
3.2.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	13
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	17
4. TEST TYPES AND RESULTS (FOR 2.4GHz BAND)	18
4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT	18
4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	18
4.1.2 TEST INSTRUMENTS.....	19
4.1.3 TEST PROCEDURES	20
4.1.4 DEVIATION FROM TEST STANDARD.....	20
4.1.5 TEST SETUP.....	21
4.1.6 EUT OPERATING CONDITIONS	21
4.1.7 TEST RESULTS	22
4.2 CONDUCTED EMISSION MEASUREMENT	36
4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	36
4.2.2 TEST INSTRUMENTS.....	36
4.2.3 TEST PROCEDURES	37
4.2.4 DEVIATION FROM TEST STANDARD.....	37
4.2.5 TEST SETUP	37
4.2.6 EUT OPERATING CONDITIONS	37
4.2.7 TEST RESULTS	38
4.3 6dB BANDWIDTH MEASUREMENT.....	42
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	42
4.3.2 TEST SETUP.....	42
4.3.3 TEST INSTRUMENTS.....	42
4.3.4 TEST PROCEDURE	42
4.3.5 DEVIATION FROM TEST STANDARD.....	42
4.3.6 EUT OPERATING CONDITIONS	42
4.3.7 TEST RESULTS	43
4.4 CONDUCTED OUTPUT POWER.....	44
4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	44
4.4.2 TEST SETUP	44
4.4.3 TEST INSTRUMENTS.....	44
4.4.4 TEST PROCEDURES	44
4.4.5 DEVIATION FROM TEST STANDARD.....	44
4.4.6 EUT OPERATING CONDITIONS	44
4.4.7 TEST RESULTS	45
4.5 POWER SPECTRAL DENSITY MEASUREMENT	46
4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	46
4.5.2 TEST SETUP	46



A D T

4.5.3 TEST INSTRUMENTS.....	46
4.5.4 TEST PROCEDURE.....	46
4.5.5 DEVIATION FROM TEST STANDARD.....	46
4.5.6 EUT OPERATING CONDITION.....	46
4.5.7 TEST RESULTS	47
4.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT.....	48
4.6.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT	48
4.6.2 TEST SETUP.....	48
4.6.3 TEST INSTRUMENTS.....	48
4.6.4 TEST PROCEDURE.....	48
4.6.5 DEVIATION FROM TEST STANDARD.....	49
4.6.6 EUT OPERATING CONDITION.....	49
4.6.7 TEST RESULTS	49
4.6.8 TEST RESULTS	50
5. TEST TYPES AND RESULTS (FOR 5.0GHz BAND).....	54
5.1 RADIATED EMISSION MEASUREMENT	54
5.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT.....	54
5.1.2 TEST INSTRUMENTS.....	55
5.1.3 TEST PROCEDURES	55
5.1.4 DEVIATION FROM TEST STANDARD.....	55
5.1.5 TEST SETUP.....	55
5.1.6 EUT OPERATING CONDITIONS	55
5.1.7 TEST RESULTS	56
5.2 CONDUCTED EMISSION MEASUREMENT	66
5.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	66
5.2.2 TEST INSTRUMENTS.....	66
5.2.3 TEST PROCEDURES	66
5.2.4 DEVIATION FROM TEST STANDARD.....	66
5.2.5 TEST SETUP.....	66
5.2.6 EUT OPERATING CONDITIONS	66
5.2.7 TEST RESULTS	67
5.3 6dB BANDWIDTH MEASUREMENT.....	71
5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	71
5.3.2 TEST SETUP.....	71
5.3.3 TEST INSTRUMENTS.....	71
5.3.4 TEST PROCEDURE.....	71
5.3.5 DEVIATION FROM TEST STANDARD.....	71
5.3.6 EUT OPERATING CONDITIONS	71
5.3.7 TEST RESULTS	72
5.4 CONDUCTED OUTPUT POWER.....	73
5.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	73
5.4.2 TEST SETUP.....	73
5.4.3 INSTRUMENTS.....	73
5.4.4 TEST PROCEDURES	73
5.4.5 DEVIATION FROM TEST STANDARD.....	73
5.4.6 EUT OPERATING CONDITIONS	73
5.4.7 TEST RESULTS	74
5.5 POWER SPECTRAL DENSITY MEASUREMENT	75
5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	75
5.5.2 TEST SETUP.....	75
5.5.3 TEST INSTRUMENTS.....	75



A D T

5.5.4 TEST PROCEDURE.....	75
5.5.5 DEVIATION FROM TEST STANDARD.....	75
5.5.6 EUT OPERATING CONDITION.....	75
5.5.7 TEST RESULTS	76
5.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT	77
5.6.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT	77
5.6.2 TEST SETUP.....	77
5.6.3 TEST INSTRUMENTS.....	77
5.6.4 TEST PROCEDURE.....	77
5.6.5 DEVIATION FROM TEST STANDARD.....	77
5.6.6 EUT OPERATING CONDITION.....	77
5.6.7 TEST RESULTS	77
6. PHOTOGRAPHS OF THE TEST CONFIGURATION.....	81
7. INFORMATION ON THE TESTING LABORATORIES	82
8. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	83



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF120309C34	Original release	Apr. 17, 2012



A D T

1. CERTIFICATION

PRODUCT: ZoneFlex 7321 Access Point

MODEL NO.: ZoneFlex 7321

BRAND: Ruckus

APPLICANT: Ruckus Wireless, Inc.

TESTED: Mar. 21 ~ Apr. 16, 2012

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 15, Subpart C (Section 15.247)

ANSI C63.10-2009

The above equipment (model: ZoneFlex 7321) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : , DATE : Apr. 17, 2012
Andrea Hsia / Specialist

APPROVED BY : , DATE : Apr. 17, 2012
Gary Chang / Technical Manager



A D T

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -3.95dB at 0.50156MHz.
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -1.0dB at 2386.00 & 11590.00MHz.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is internal UFL not a standard connector.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.34 dB
	200MHz ~1000MHz	3.35 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	ZoneFlex 7321 Access Point
MODEL NO.	ZoneFlex 7321
POWER SUPPLY	12Vdc (adapter) 48Vdc (POE)
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 450.0Mbps
OPERATING FREQUENCY	2.4GHz: 2412 ~ 2462MHz 5.0GHz: 5745 ~ 5825MHz
NUMBER OF CHANNEL	2.4GHz: 11 for 802.11b, 802.11g, 802.11n (20MHz) 7 for 802.11n (40MHz) 5.0GHz: 5 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz)
OUTPUT POWER	917.4mW for 2412 ~ 2462MHz 496.1mW for 5745 ~ 5825MHz
ANTENNA TYPE	2.4GHz: Omni antenna with 1dBi gain 5.0GHz: Omni antenna with 2dBi gain
ANTENNA CONNECTOR	internal UFL
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	NA

NOTE:

1. The frequency bands used in this EUT are listed as follows:

Frequency Band (MHz)	2412~2462	5180~5240	5745~5825
802.11b	✓		
802.11g	✓		
802.11a		✓	✓
802.11n (20MHz)	✓	✓	✓
802.11n (40MHz)	✓	✓	✓

2. The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

MODULATION MODE	TX FUNCTION
802.11b	2TX
802.11g	2TX
802.11a	2TX
802.11n (20MHz)	2TX
802.11n (40MHz)	2TX



A D T

3. The EUT were powered by the following adapter & POE:

ADAPTER	
BRAND:	RUCKUS
MODEL:	HK-AD-120A100-US
INPUT:	100-240Vac, 0.4A, 50/60Hz
OUTPUT:	12Vdc, 1A
POWER LINE:	1.8m non-shielded cable without core

POE's ADAPTER	
BRAND:	RUCKUS
MODEL:	PA1024-4HU
INPUT:	100-240Vac, 0.6A, 50-60Hz
OUTPUT:	48Vdc, 0.42A, 2W Max
POWER LINE:	1.5m non-shielded cable without core

POE	
BRAND:	EnGenius
MODEL:	NPE-5818

* All as above are provided as support units only.

4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



A D T

3.2 DESCRIPTION OF TEST MODES

FOR 2.4GHz:

11 channels are provided for 802.11b, 802.11g and 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

FOR 5.0GHz (5745 ~ 5825MHz):

5 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
151	5755MHz	159	5795MHz



A D T

3.2.1 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	E5420	33MCKMQ1	NA
2	USB DONGLE	TRANSCEND	V85	538455 4488	NA


NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1.	10m RJ45 cable.

NOTE:


1. All power cords of the above support units are non shielded (1.8m).
2. Item 1 acted as communication partner to transfer data.

3.2.2 CONFIGURATION OF SYSTEM UNDER TEST

TEST MODE A

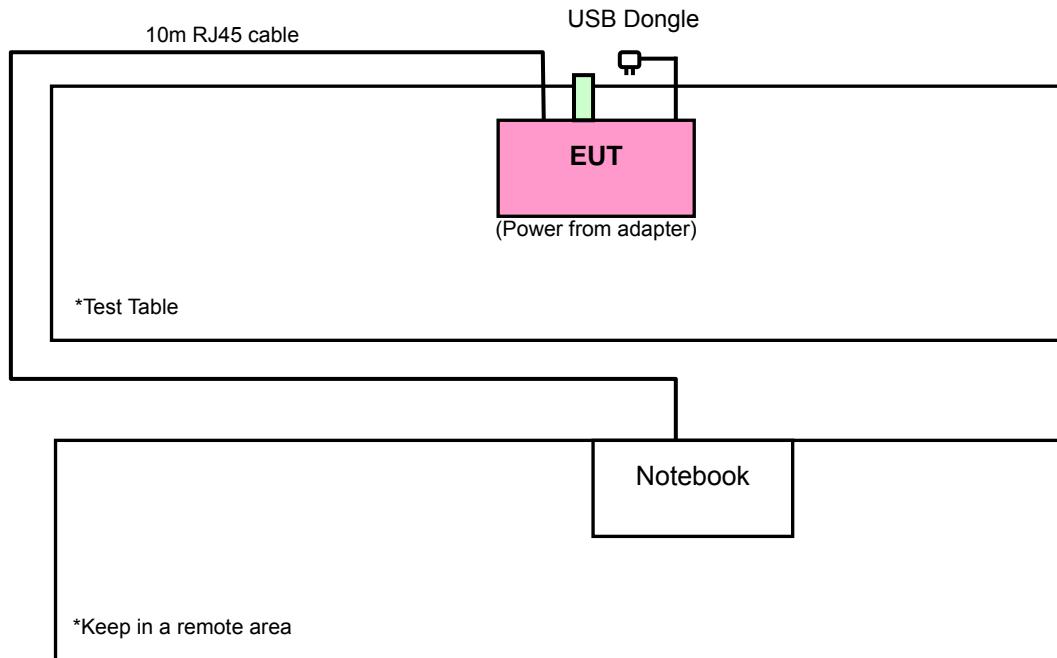

TEST MODE B

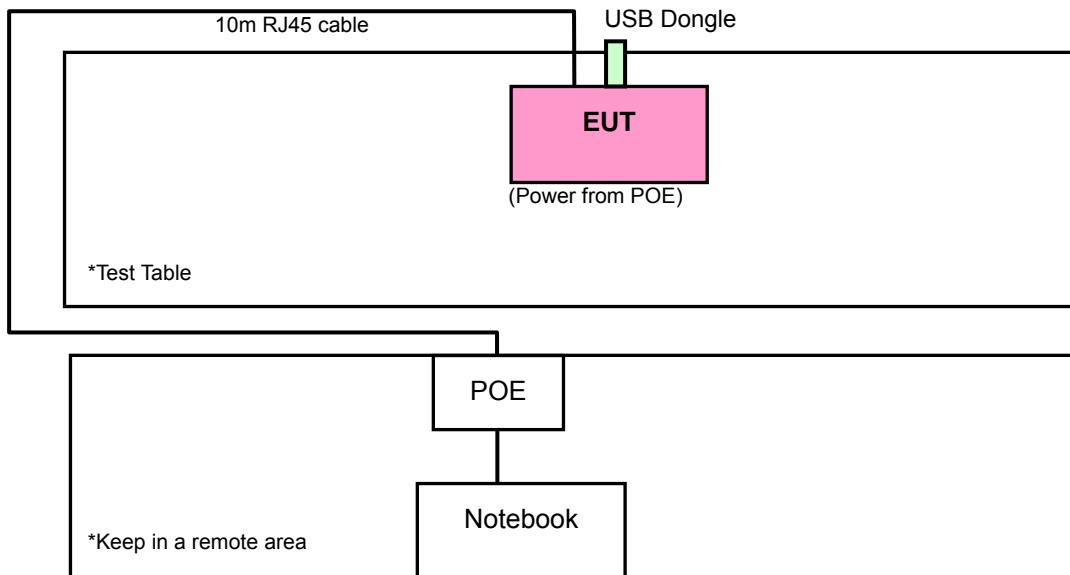



A D T

3.2.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL FOR 2.4GHz:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
A	√	√	√	√	Power from Adapter
B	-	√	√	-	Power from POE

Where

RE≥1G: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE: “-”means no effect.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
A	802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	15.0

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A & B	802.11n (20MHz)	1 to 11	11	OFDM	BPSK	7.2

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A & B	802.11n (20MHz)	1 to 11	11	OFDM	BPSK	7.2



A D T

BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
A	802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	7.2
A	802.11n (40MHz)	3 to 9	3, 9	OFDM	BPSK	15.0

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
A	802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	15.0

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
RE≥1G	25deg. C, 65%RH	120Vac, 60Hz	Haru Yang
RE<1G	25deg. C, 65%RH	120Vac, 60Hz	Haru Yang
PLC	25deg. C, 65%RH	120Vac, 60Hz	Aska Huang
APCM	25deg. C, 65%RH	120Vac, 60Hz	Haru Yang



A D T

FOR 5.0GHz (5745 ~ 5825MHz):

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
A	√	√	√	√	Power from Adapter
B	-	√	√	-	Power from POE

Where RE≥1G: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE: “-”means no effect.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6.0
A	802.11n (20MHz)	149 to 165	149, 157, 165	OFDM	BPSK	7.2
A	802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	15.0

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A & B	802.11n (40MHz)	151 to 159	151	OFDM	BPSK	15.0

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A & B	802.11n (40MHz)	151 to 159	151	OFDM	BPSK	15.0



A D T

BANDEdge MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	149 to 165	149, 165	OFDM	BPSK	6.0
A	802.11n (20MHz)	149 to 165	149, 165	OFDM	BPSK	7.2
A	802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	15.0

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6.0
A	802.11n (20MHz)	149 to 165	149, 157, 165	OFDM	BPSK	7.2
A	802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	15.0

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
RE≥1G	25deg. C, 65%RH	120Vac, 60Hz	Haru Yang
RE<1G	25deg. C, 65%RH	120Vac, 60Hz	Haru Yang
PLC	25deg. C, 65%RH	120Vac, 60Hz	Aska Huang
APCM	25deg. C, 65%RH	120Vac, 60Hz	Haru Yang



A D T

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



A D T

4. TEST TYPES AND RESULTS (FOR 2.4GHz BAND)

4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_{UV}/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUe DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESIB7	100212	Aug. 02, 2011	Aug. 01, 2012
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Jul. 21, 2011	Jul. 20, 2012
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Dec. 20, 2011	Dec. 19, 2012
HORN Antenna SCHWARZBECK	9120D	209	Aug. 25, 2011	Aug. 24, 2012
HORN Antenna SCHWARZBECK	BBHA 9170	148	Jul. 20, 2011	Jul. 19, 2012
Preamplifier Agilent	8447D	2944A10633	Oct. 29, 2011	Oct. 28, 2012
Preamplifier Agilent	8449B	3008A01964	Oct. 29, 2011	Oct. 28, 2012
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250723/4	Aug. 30, 2011	
RF signal cable HUBER+SUHNNER	SUCOFLEX 106	12738/6+309224/4	Aug. 30, 2011	Aug. 29, 2012
Software ADT.	ADT_Radiated_V7.6.15.9.2	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA	NA
Turn Table ADT.	TT100	TT93021703	NA	NA
Turn Table Controller ADT.	SC100	SC93021703	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	815221	Oct. 29, 2011	Oct. 28, 2012
High Speed Peak Power Meter	ML2495A	0842014	Apr. 26, 2011	Apr. 25, 2012
Power Sensor	MA2411B	0738404	Apr. 26, 2011	Apr. 25, 2012

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 988962.
 5. The IC Site Registration No. is IC 7450F-3.



A D T

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 100kHz and video bandwidth is 300kHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 1kHz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

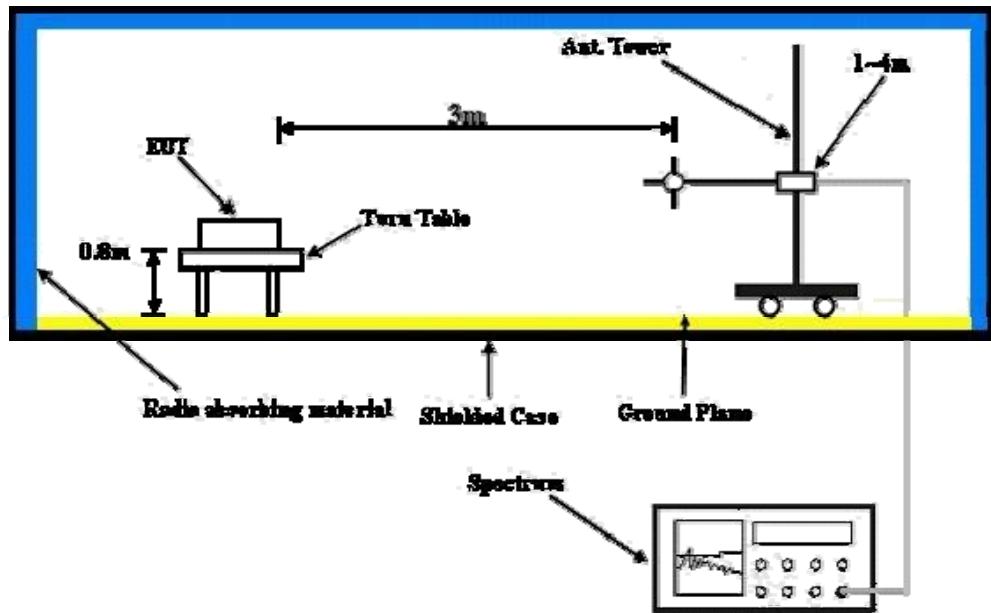

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. Prepared notebook system outside of testing area to act as a communication partners.
- c. The communication partner connected with EUT via a RJ45 cable and run a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- d. The communication partner sent data to EUT by command "PING".



A D T

4.1.7 TEST RESULTS

ABOVE 1GHz DATA: 802.11b

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 1		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH		TESTED BY Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.00	65.1 PK	74.0	-8.9	1.36 H	223	33.80	31.30
2	2386.00	52.3 AV	54.0	-1.7	1.36 H	223	21.00	31.30
3	*2412.00	109.5 PK			1.36 H	225	78.10	31.40
4	*2412.00	105.6 AV			1.36 H	225	74.20	31.40
5	4824.00	48.0 PK	74.0	-26.0	1.00 H	42	10.80	37.20
6	4824.00	38.9 AV	54.0	-15.1	1.00 H	42	1.70	37.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.00	65.4 PK	74.0	-8.6	1.00 V	335	34.10	31.30
2	2386.00	53.0 AV	54.0	-1.0	1.00 V	335	21.70	31.30
3	*2412.00	111.1 PK			1.53 V	320	79.70	31.40
4	*2412.00	107.1 AV			1.53 V	320	75.70	31.40
5	4824.00	50.8 PK	74.0	-23.2	1.09 V	315	13.60	37.20
6	4824.00	46.0 AV	54.0	-8.0	1.09 V	315	8.80	37.20

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.7 PK	74.0	-10.3	1.31 H	321	32.40	31.30
2	2390.00	49.5 AV	54.0	-4.5	1.31 H	321	18.20	31.30
3	*2437.00	113.2 PK			1.31 H	321	81.70	31.50
4	*2437.00	109.1 AV			1.31 H	321	77.60	31.50
5	4874.00	47.0 PK	74.0	-27.0	1.05 H	132	9.70	37.30
6	4874.00	37.8 AV	54.0	-16.2	1.05 H	132	0.50	37.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.6 PK	74.0	-15.4	1.00 V	328	27.30	31.30
2	2390.00	50.2 AV	54.0	-3.8	1.00 V	328	18.90	31.30
3	*2437.00	115.0 PK			1.18 V	345	83.50	31.50
4	*2437.00	110.4 AV			1.18 V	345	78.90	31.50
5	4874.00	48.9 PK	74.0	-25.1	1.07 V	216	11.60	37.30
6	4874.00	42.9 AV	54.0	-11.1	1.07 V	216	5.60	37.30

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.2 PK			1.99 H	219	79.60	31.60
2	*2462.00	106.1 AV			1.99 H	219	74.50	31.60
3	2487.00	64.6 PK	74.0	-9.4	1.32 H	223	32.90	31.70
4	2487.00	52.1 AV	54.0	-1.9	1.32 H	223	20.40	31.70
5	4924.00	46.3 PK	74.0	-27.7	1.00 H	56	8.90	37.40
6	4924.00	37.1 AV	54.0	-16.9	1.00 H	56	-0.30	37.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	112.0 PK			1.42 V	315	80.40	31.60
2	*2462.00	107.8 AV			1.42 V	315	76.20	31.60
3	2483.50	63.6 PK	74.0	-10.4	1.19 V	339	32.00	31.60
4	2483.50	52.9 AV	54.0	-1.1	1.19 V	339	21.30	31.60
5	4924.00	48.1 PK	74.0	-25.9	1.06 V	312	10.70	37.40
6	4924.00	40.2 AV	54.0	-13.8	1.06 V	312	2.80	37.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.



A D T

802.11g

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		FREQUENCY RANGE		1 ~ 25GHz
INPUT POWER (SYSTEM)		DETECTOR FUNCTION		Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		TESTED BY		Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.7 PK	74.0	-10.3	1.40 H	320	32.40	31.30
2	2390.00	51.3 AV	54.0	-2.7	1.40 H	320	20.00	31.30
3	*2412.00	108.9 PK			1.40 H	216	77.50	31.40
4	*2412.00	99.2 AV			1.40 H	216	67.80	31.40
5	4824.00	47.5 PK	74.0	-26.5	1.04 H	289	10.30	37.20
6	4824.00	33.2 AV	54.0	-20.8	1.04 H	289	-4.00	37.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.8 PK	74.0	-6.2	1.23 V	206	36.50	31.30
2	2390.00	52.7 AV	54.0	-1.3	1.23 V	206	21.40	31.30
3	#2400.00	85.2 PK	89.9	-4.7	1.20 V	218	53.90	31.30
4	#2400.00	63.7 AV	80.9	-17.2	1.20 V	218	32.40	31.30
5	*2412.00	109.9 PK			1.20 V	323	78.50	31.40
6	*2412.00	100.9 AV			1.20 V	323	69.50	31.40
7	4824.00	46.2 PK	74.0	-27.8	1.00 V	163	9.00	37.20
8	4824.00	33.5 AV	54.0	-20.5	1.00 V	163	-3.70	37.20

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.
6. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.4 PK	74.0	-15.6	1.38 H	213	27.10	31.30
2	2390.00	46.6 AV	54.0	-7.4	1.38 H	213	15.30	31.30
3	*2437.00	111.1 PK			1.38 H	213	79.60	31.50
4	*2437.00	101.7 AV			1.38 H	213	70.20	31.50
5	4874.00	46.5 PK	74.0	-27.5	1.05 H	294	9.20	37.30
6	4874.00	33.3 AV	54.0	-20.7	1.05 H	294	-4.00	37.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.1 PK	74.0	-14.9	1.18 V	216	27.80	31.30
2	2390.00	48.1 AV	54.0	-5.9	1.18 V	216	16.80	31.30
3	*2437.00	111.8 PK			1.18 V	216	80.30	31.50
4	*2437.00	102.6 AV			1.18 V	216	71.10	31.50
5	4874.00	46.5 PK	74.0	-27.5	1.00 V	139	9.20	37.30
6	4874.00	34.0 AV	54.0	-20.0	1.00 V	139	-3.30	37.30

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 11		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH		TESTED BY Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.2 PK			1.35 H	209	78.60	31.60
2	*2462.00	100.6 AV			1.35 H	209	69.00	31.60
3	2483.50	67.5 PK	74.0	-6.5	1.33 H	216	35.90	31.60
4	2483.50	51.4 AV	54.0	-2.6	1.33 H	216	19.80	31.60
5	4924.00	47.1 PK	74.0	-26.9	1.07 H	318	9.70	37.40
6	4924.00	33.8 AV	54.0	-20.2	1.07 H	318	-3.60	37.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.9 PK			1.22 V	206	79.30	31.60
2	*2462.00	101.7 AV			1.22 V	206	70.10	31.60
3	2483.50	69.2 PK	74.0	-4.8	1.17 V	319	37.60	31.60
4	2483.50	52.7 AV	54.0	-1.3	1.17 V	319	21.10	31.60
5	4924.00	47.3 PK	74.0	-26.7	1.00 V	157	9.90	37.40
6	4924.00	34.2 AV	54.0	-19.8	1.00 V	157	-3.20	37.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.



A D T

802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		FREQUENCY RANGE		1 ~ 25GHz
INPUT POWER (SYSTEM)		DETECTOR FUNCTION		Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		TESTED BY		Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.4 PK	74.0	-10.6	1.41 H	224	32.10	31.30
2	2390.00	51.5 AV	54.0	-2.5	1.41 H	224	20.20	31.30
3	*2412.00	108.7 PK			1.34 H	227	77.30	31.40
4	*2412.00	99.3 AV			1.34 H	227	67.90	31.40
5	4824.00	48.3 PK	74.0	-25.7	1.07 H	293	11.10	37.20
6	4824.00	34.1 AV	54.0	-19.9	1.07 H	293	-3.10	37.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.8 PK	74.0	-5.2	1.00 V	312	37.50	31.30
2	2390.00	52.5 AV	54.0	-1.5	1.00 V	312	21.20	31.30
3	*2412.00	109.3 PK			1.16 V	218	77.90	31.40
4	*2412.00	100.5 AV			1.16 V	218	69.10	31.40
5	4824.00	49.2 PK	74.0	-24.8	1.00 V	137	12.00	37.20
6	4824.00	36.1 AV	54.0	-17.9	1.00 V	137	-1.10	37.20

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.4 PK	74.0	-18.6	1.15 H	209	24.10	31.30
2	2390.00	47.3 AV	54.0	-6.7	1.15 H	209	16.00	31.30
3	*2437.00	109.7 PK			1.20 H	231	78.20	31.50
4	*2437.00	100.1 AV			1.20 H	231	68.60	31.50
5	4874.00	46.3 PK	74.0	-27.7	1.02 H	140	9.00	37.30
6	4874.00	33.9 AV	54.0	-20.1	1.02 H	140	-3.40	37.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.8 PK	74.0	-17.2	1.16 V	216	25.50	31.30
2	2390.00	48.0 AV	54.0	-6.0	1.16 V	216	16.70	31.30
3	*2437.00	110.6 PK			1.16 V	216	79.10	31.50
4	*2437.00	101.2 AV			1.16 V	216	69.70	31.50
5	4874.00	46.5 PK	74.0	-27.5	1.00 V	139	9.20	37.30
6	4874.00	34.0 AV	54.0	-20.0	1.00 V	139	-3.30	37.30

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.7 PK			1.22 H	276	79.10	31.60
2	*2462.00	101.4 AV			1.22 H	276	69.80	31.60
3	2483.50	68.4 PK	74.0	-5.6	1.19 H	253	36.80	31.60
4	2483.50	51.4 AV	54.0	-2.6	1.19 H	253	19.80	31.60
5	4924.00	49.3 PK	74.0	-24.7	1.00 H	136	11.90	37.40
6	4924.00	36.2 AV	54.0	-17.8	1.00 H	136	-1.20	37.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.6 PK			1.18 V	211	80.00	31.60
2	*2462.00	102.2 AV			1.18 V	211	70.60	31.60
3	2483.50	69.7 PK	74.0	-4.3	1.00 V	74	38.10	31.60
4	2483.50	52.7 AV	54.0	-1.3	1.00 V	74	21.10	31.60
5	4924.00	49.7 PK	74.0	-24.3	1.00 V	133	12.30	37.40
6	4924.00	35.8 AV	54.0	-18.2	1.00 V	133	-1.60	37.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.



A D T

802.11n (40MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		FREQUENCY RANGE		1 ~ 25GHz
INPUT POWER (SYSTEM)		DETECTOR FUNCTION		Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		TESTED BY		Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.4 PK	74.0	-5.6	1.35 H	207	37.10	31.30
2	2390.00	51.7 AV	54.0	-2.3	1.35 H	207	20.40	31.30
3	*2422.00	104.5 PK			1.40 H	215	73.10	31.40
4	*2422.00	95.3 AV			1.40 H	215	63.90	31.40
5	4844.00	47.4 PK	74.0	-26.6	1.10 H	327	10.10	37.30
6	4844.00	34.6 AV	54.0	-19.4	1.10 H	327	-2.70	37.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.2 PK	74.0	-4.8	1.00 V	188	37.90	31.30
2	2390.00	52.9 AV	54.0	-1.1	1.00 V	188	21.60	31.30
3	*2422.00	105.5 PK			1.16 V	309	74.10	31.40
4	*2422.00	96.1 AV			1.16 V	309	64.70	31.40
5	4844.00	46.2 PK	74.0	-27.8	1.00 V	157	8.90	37.30
6	4844.00	33.3 AV	54.0	-20.7	1.00 V	157	-4.00	37.30

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.5 PK	74.0	-9.5	1.30 H	196	33.20	31.30
2	2390.00	51.7 AV	54.0	-2.3	1.30 H	196	20.40	31.30
3	*2437.00	106.1 PK			1.39 H	251	74.60	31.50
4	*2437.00	96.8 AV			1.39 H	251	65.30	31.50
5	4874.00	46.7 PK	74.0	-27.3	1.07 H	314	9.40	37.30
6	4874.00	32.9 AV	54.0	-21.1	1.07 H	314	-4.40	37.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.3 PK	74.0	-8.7	1.24 V	215	34.00	31.30
2	2390.00	52.9 AV	54.0	-1.1	1.24 V	215	21.60	31.30
3	*2437.00	106.9 PK			1.20 V	211	75.40	31.50
4	*2437.00	97.9 AV			1.20 V	211	66.40	31.50
5	4874.00	46.4 PK	74.0	-27.6	1.00 V	237	9.10	37.30
6	4874.00	33.2 AV	54.0	-20.8	1.00 V	237	-4.10	37.30

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 9	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	106.4 PK			1.29 H	241	74.90	31.50
2	*2452.00	96.9 AV			1.29 H	241	65.40	31.50
3	2483.50	71.6 PK	74.0	-2.4	1.32 H	237	40.00	31.60
4	2483.50	51.4 AV	54.0	-2.6	1.32 H	237	19.80	31.60
5	4904.00	46.4 PK	74.0	-27.6	1.05 H	314	9.00	37.40
6	4904.00	32.5 AV	54.0	-21.5	1.05 H	314	-4.90	37.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	107.3 PK			1.17 V	310	75.80	31.50
2	*2452.00	98.0 AV			1.17 V	310	66.50	31.50
3	2483.50	72.5 PK	74.0	-1.5	1.14 V	310	40.90	31.60
4	2483.50	51.7 AV	54.0	-2.3	1.14 V	310	20.10	31.60
5	4904.00	46.1 PK	74.0	-27.9	1.00 V	128	8.70	37.40
6	4904.00	32.8 AV	54.0	-21.2	1.00 V	128	-4.60	37.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.



A D T

BELOW 1GHz WORST-CASE DATA : 802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL			
CHANNEL		Channel 11		FREQUENCY RANGE	
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION	
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH		TEST MODE	
TESTED BY		Haru Yang			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.68	37.8 QP	40.0	-2.2	1.00 H	245	24.50	13.30
2	103.78	31.0 QP	43.5	-12.5	1.00 H	104	21.10	9.90
3	191.28	32.8 QP	43.5	-10.7	1.50 H	82	21.10	11.70
4	232.11	36.9 QP	46.0	-9.1	1.50 H	258	24.60	12.30
5	624.85	35.2 QP	46.0	-10.8	1.25 H	173	12.90	22.30
6	875.67	33.6 QP	46.0	-12.4	1.00 H	319	7.10	26.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.68	37.8 QP	40.0	-2.2	1.00 V	32	24.50	13.30
2	103.78	31.0 QP	43.5	-12.5	1.25 V	13	21.10	9.90
3	156.28	31.8 QP	43.5	-11.7	1.25 V	147	17.70	14.10
4	235.99	33.6 QP	46.0	-12.4	1.50 V	331	21.10	12.50
5	624.85	36.5 QP	46.0	-9.5	1.25 V	174	14.20	22.30
6	852.33	34.9 QP	46.0	-11.1	1.25 V	118	8.70	26.20

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TEST MODE	B
TESTED BY	Haru Yang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	53.23	26.3 QP	40.0	-13.7	2.00 H	89	12.50	13.80
2	105.73	25.3 QP	43.5	-18.2	2.00 H	104	15.20	10.10
3	234.05	25.1 QP	46.0	-20.9	1.00 H	59	12.70	12.40
4	399.31	26.4 QP	46.0	-19.6	1.00 H	132	8.90	17.50
5	624.85	30.4 QP	46.0	-15.6	1.25 H	310	8.10	22.30
6	850.39	31.4 QP	46.0	-14.6	1.50 H	82	5.20	26.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	55.18	38.3 QP	40.0	-1.7	1.00 V	45	24.60	13.70
2	72.67	36.6 QP	40.0	-3.4	1.00 V	19	24.90	11.70
3	156.28	26.3 QP	43.5	-17.2	1.25 V	276	12.20	14.10
4	237.94	28.3 QP	46.0	-17.7	2.00 V	322	15.80	12.50
5	624.85	27.6 QP	46.0	-18.4	1.00 V	282	5.30	22.30
6	850.39	35.8 QP	46.0	-10.2	1.25 V	149	9.60	26.20

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Nov. 19, 2011	Nov. 18, 2012
RF signal cable Woken	5D-FB	Cable-HYCO2-01	Dec. 22, 2011	Dec. 21, 2012
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Dec. 30, 2011	Dec. 29, 2012
LISN ROHDE & SCHWARZ	ESH3-Z5	100312	Jul. 07, 2011	Jul. 06, 2012
V-LISN SCHWARZBECK	NNBL 8226-2	8226-142	Jun. 30, 2011	Jun. 29, 2012
LISN ROHDE & SCHWARZ	ENV216	100072	Jun. 10, 2011	Jun. 09, 2012
Software ADT	ADT_Cond_V7.3.7	NA	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 2.
 3. The VCCI Site Registration No. is C-2047.

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

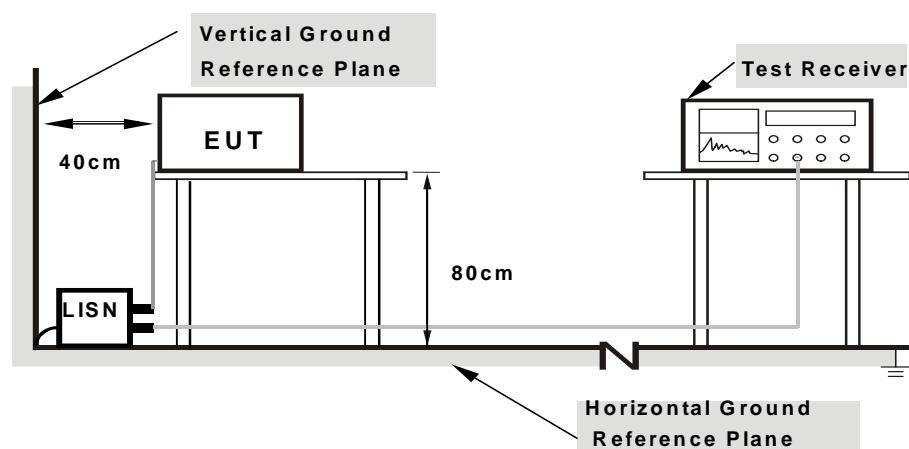

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

4.2.7 TEST RESULTS

CONDUCTED WORST-CASE DATA : 802.11n (20MHz)

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	A		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
			Factor	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	(dB)		
		[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.17734	0.17	37.34	18.94	37.51	19.11	64.61	54.61	-27.10	-35.50
2	0.43906	0.20	37.16	30.79	37.36	30.99	57.08	47.08	-19.72	-16.09
3	0.91953	0.23	35.90	20.16	36.13	20.39	56.00	46.00	-19.87	-25.61
4	1.80078	0.29	42.68	26.83	42.97	27.12	56.00	46.00	-13.03	-18.88
5	4.85547	0.40	36.62	23.19	37.02	23.59	56.00	46.00	-18.98	-22.41
6	6.57813	0.43	36.38	26.21	36.81	26.64	60.00	50.00	-23.19	-23.36


REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. The emission levels of other frequencies were very low against the limit.

3. Margin value = Emission level - Limit value

4. Correction factor = Insertion loss + Cable loss


5. Emission Level = Correction Factor + Reading Value.

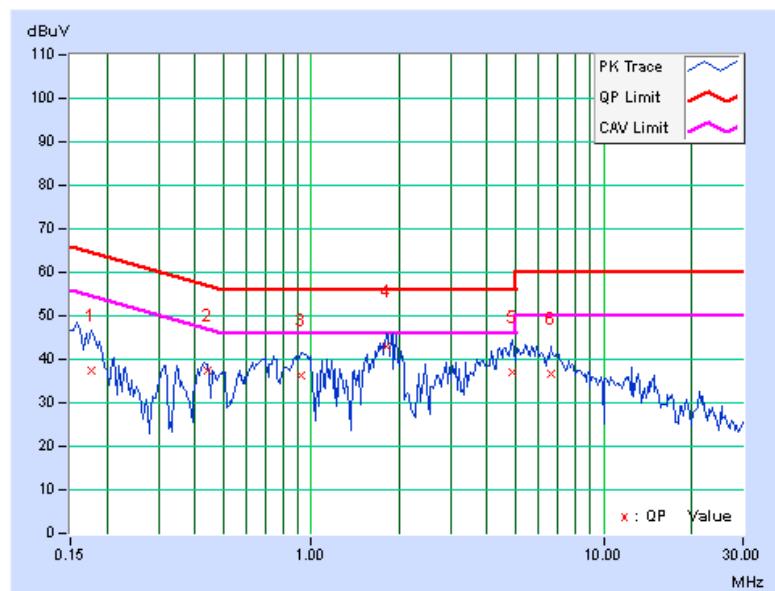

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	A		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.18906	0.15	39.60	26.59	39.75	26.74	64.08	54.08	-24.32	-27.33
2	0.75547	0.19	33.25	20.78	33.44	20.97	56.00	46.00	-22.56	-25.03
3	1.75391	0.25	37.89	20.12	38.14	20.37	56.00	46.00	-17.86	-25.63
4	3.05859	0.33	36.01	16.97	36.34	17.30	56.00	46.00	-19.66	-28.70
5	4.66797	0.40	36.52	19.00	36.92	19.40	56.00	46.00	-19.08	-26.60
6	5.75781	0.44	38.43	20.47	38.87	20.91	60.00	50.00	-21.13	-29.09

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

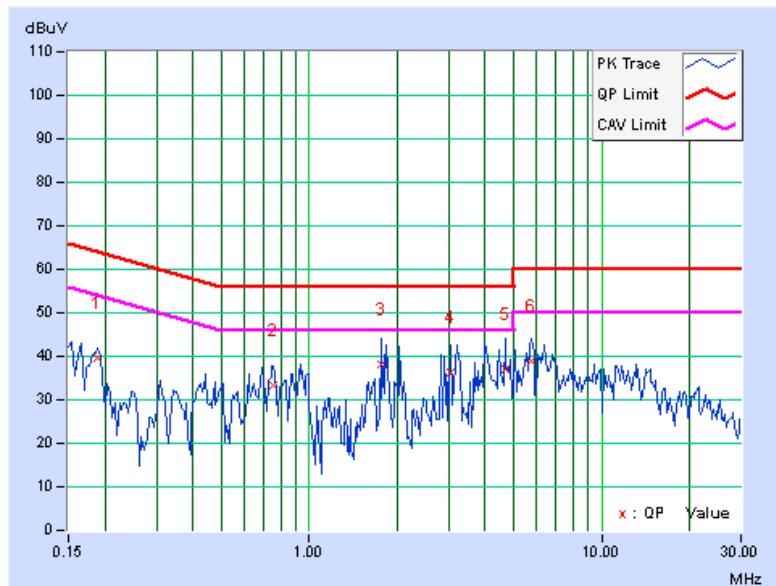


PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor (dB)	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	0.17	61.13	47.33	61.30	47.50	65.79	55.79	-4.49	-8.29
2	0.18906	0.17	53.98	37.56	54.15	37.73	64.08	54.08	-9.93	-16.35
3	0.23203	0.17	50.92	38.91	51.09	39.08	62.38	52.38	-11.28	-13.29
4	0.50938	0.21	47.50	41.44	47.71	41.65	56.00	46.00	-8.29	-4.35
5	2.11328	0.31	40.22	34.77	40.53	35.08	56.00	46.00	-15.47	-10.92
6	5.00000	0.41	40.18	32.14	40.59	32.55	56.00	46.00	-15.41	-13.45

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

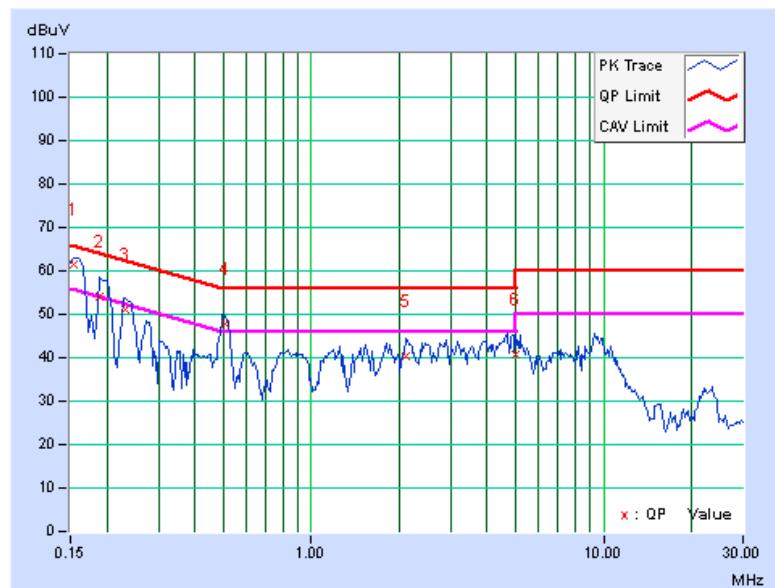


PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor (dB)	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	0.17	60.65	47.17	60.82	47.34	65.79	55.79	-4.97	-8.45
2	0.18906	0.15	53.90	37.42	54.05	37.57	64.08	54.08	-10.02	-16.50
3	0.50938	0.18	46.59	40.46	46.77	40.64	56.00	46.00	-9.23	-5.36
4	2.06641	0.27	38.44	31.19	38.71	31.46	56.00	46.00	-17.29	-14.54
5	4.14844	0.38	41.16	34.95	41.54	35.33	56.00	46.00	-14.46	-10.67
6	9.44141	0.55	45.51	40.23	46.06	40.78	60.00	50.00	-13.94	-9.22

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

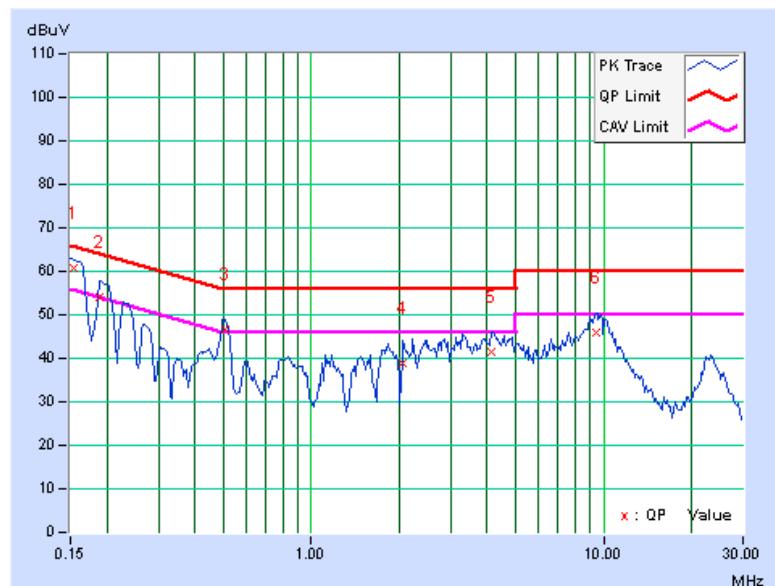




A D T

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST SETUP

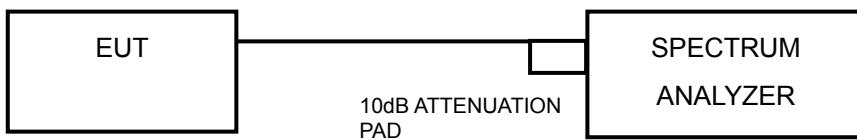

4.3.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.3.4 TEST PROCEDURE

- a. Set resolution bandwidth (RBW) = approximately 1% of the emission bandwidth
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



A D T

4.3.7 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	10.29	10.30	0.5	PASS
6	2437	10.29	10.28	0.5	PASS
11	2462	10.29	10.28	0.5	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	16.57	16.56	0.5	PASS
6	2437	16.52	16.54	0.5	PASS
11	2462	16.57	16.54	0.5	PASS

802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	17.72	17.81	0.5	PASS
6	2437	17.71	17.82	0.5	PASS
11	2462	17.80	17.80	0.5	PASS

802.11n (40MHz)


CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
3	2422	37.13	36.50	0.5	PASS
6	2437	36.97	36.32	0.5	PASS
9	2452	36.74	36.33	0.5	PASS

4.4 CONDUCTED OUTPUT POWER

4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.4.2 TEST SETUP

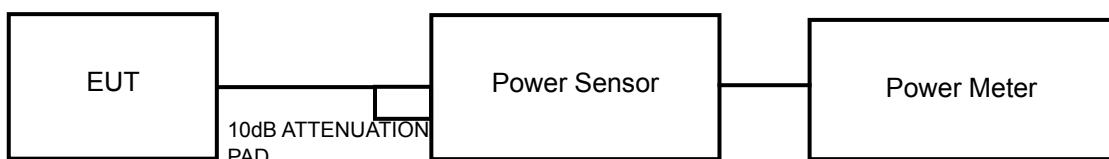

4.4.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the peak power level.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.



A D T

4.4.7 TEST RESULTS

802.11b

CHAN.	FREQUE NCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	22.92	22.82	387.3	25.9	30	PASS
6	2437	25.09	25.03	641.3	28.1	30	PASS
11	2462	24.17	23.98	511.3	27.1	30	PASS

NOTE: Directional gain = 1dBi + 10log(2) = 4.01dBi < 6dBi , so the limit no need to reduced.

802.11g

CHAN.	FREQUE NCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	25.23	24.97	647.5	28.1	30	PASS
6	2437	26.50	26.38	881.2	29.5	30	PASS
11	2462	26.38	25.73	808.6	29.1	30	PASS

NOTE: Directional gain = 1dBi + 10log(2) = 4.01dBi < 6dBi , so the limit no need to reduced.

802.11n (20MHz)

CHAN.	FREQUE NCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	25.22	25.14	659.2	28.2	30	PASS
6	2437	26.54	26.39	886.3	29.5	30	PASS
11	2462	26.67	26.56	917.4	29.6	30	PASS

802.11n (40MHz)

CHAN.	FREQUE NCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
3	2422	24.73	23.85	539.8	27.3	30	PASS
6	2437	25.67	25.26	704.7	28.5	30	PASS
9	2452	25.95	25.49	747.5	28.7	30	PASS




A D T

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST SETUP

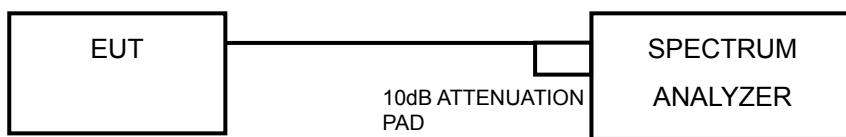

4.5.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

- a. Set the RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
- b. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
- c. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- d. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(3 \text{ kHz}/100\text{kHz})$

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6



A D T

4.5.7 TEST RESULTS

802.11b

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	10.60	-4.63	3.01	-1.62	6	PASS
	6	2437	12.64	-2.59	3.01	0.42	6	PASS
	11	2462	11.63	-3.60	3.01	-0.59	6	PASS
1	1	2412	10.55	-4.68	3.01	-1.67	6	PASS
	6	2437	12.61	-2.62	3.01	0.39	6	PASS
	11	2462	11.63	-3.60	3.01	-0.59	6	PASS

NOTE: Directional gain = 1dBi + 10log(2) = 4.01dB < 6dB , so the limit no need to reduced.

802.11g

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	4.17	-11.06	3.01	-8.05	6	PASS
	6	2437	5.38	-9.85	3.01	-6.84	6	PASS
	11	2462	5.21	-10.02	3.01	-7.01	6	PASS
1	1	2412	4.09	-11.14	3.01	-8.13	6	PASS
	6	2437	5.53	-9.70	3.01	-6.69	6	PASS
	11	2462	4.97	-10.26	3.01	-7.25	6	PASS

NOTE: Directional gain = 1dBi + 10log(2) = 4.01dB < 6dB , so the limit no need to reduced.

802.11n (20MHz)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	4.08	-11.15	3.01	-8.14	8	PASS
	6	2437	5.33	-9.90	3.01	-6.89	8	PASS
	11	2462	5.35	-9.88	3.01	-6.87	8	PASS
1	1	2412	2.18	-13.05	3.01	-10.04	8	PASS
	6	2437	3.33	-11.90	3.01	-8.89	8	PASS
	11	2462	3.47	-11.76	3.01	-8.75	8	PASS

802.11n (40MHz)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	3	2422	0.87	-14.36	3.01	-11.35	8	PASS
	6	2437	1.66	-13.57	3.01	-10.56	8	PASS
	9	2452	1.85	-13.38	3.01	-10.37	8	PASS
1	3	2422	-2.75	-17.98	3.01	-14.97	8	PASS
	6	2437	-1.42	-16.65	3.01	-13.64	8	PASS
	9	2452	-1.26	-16.49	3.01	-13.48	8	PASS




A D T

4.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST SETUP

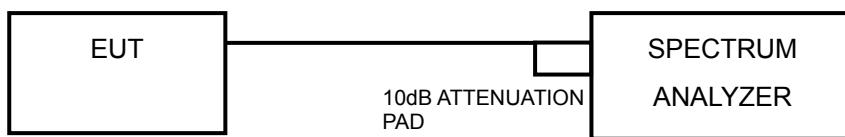

4.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



A D T

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined.
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.7 TEST RESULTS

The conducted emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit. Only worst data of each operating mode is presented.

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T


4.6.8 TEST RESULTS

802.11b


CH 1

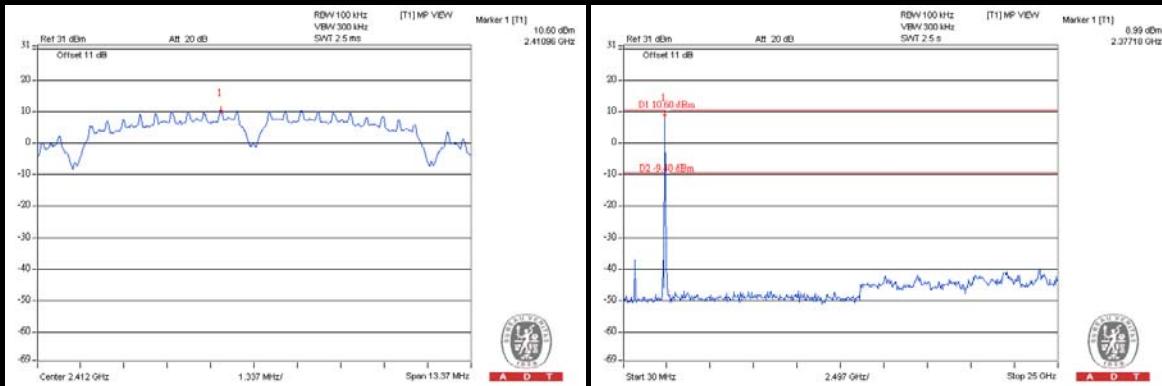

CH 6

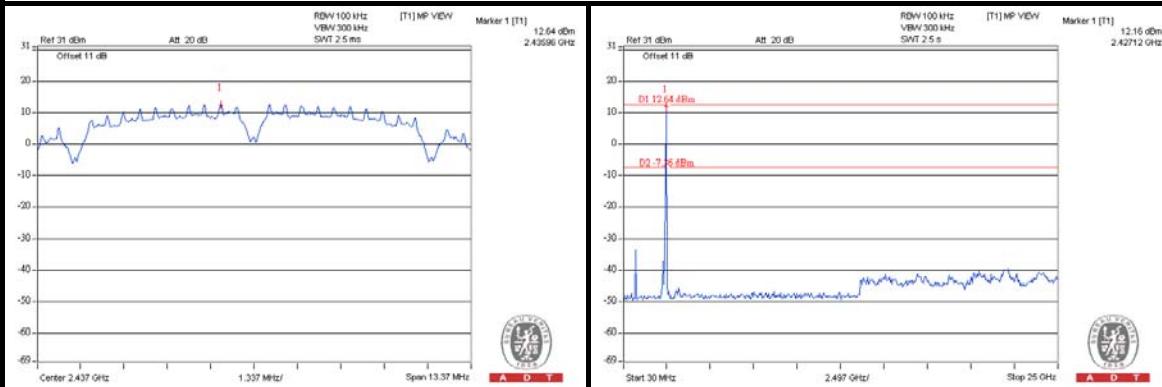

CH 11

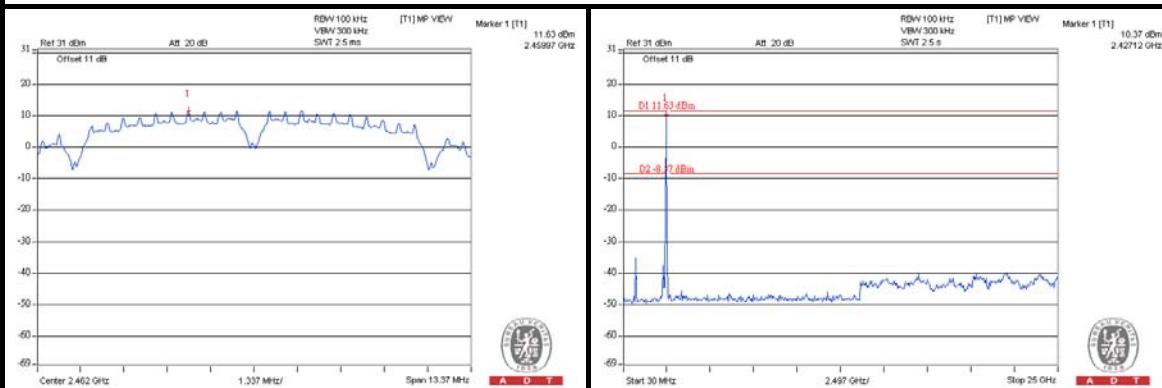





A D T

802.11g


CH 1

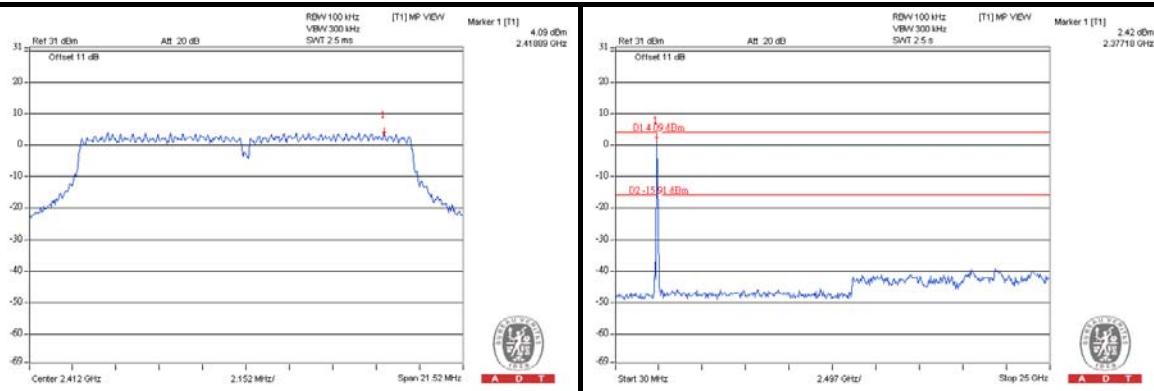

CH 6

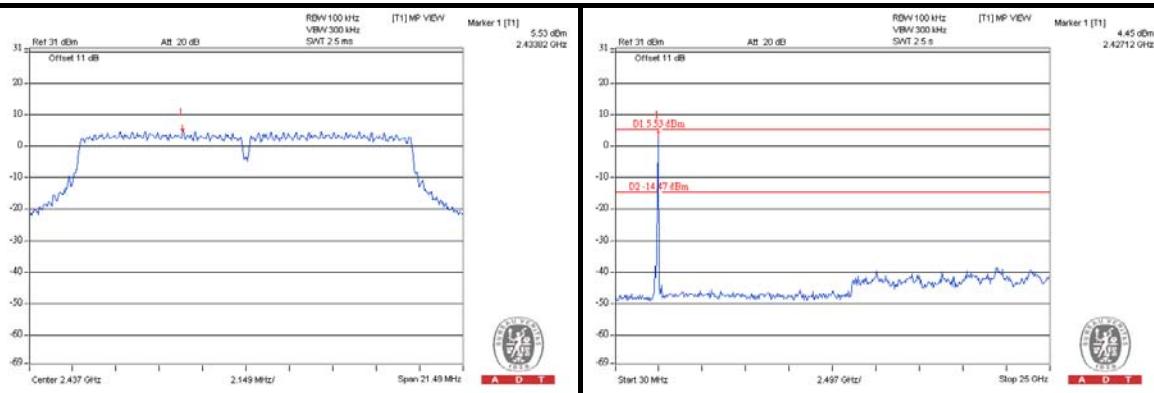

CH 11

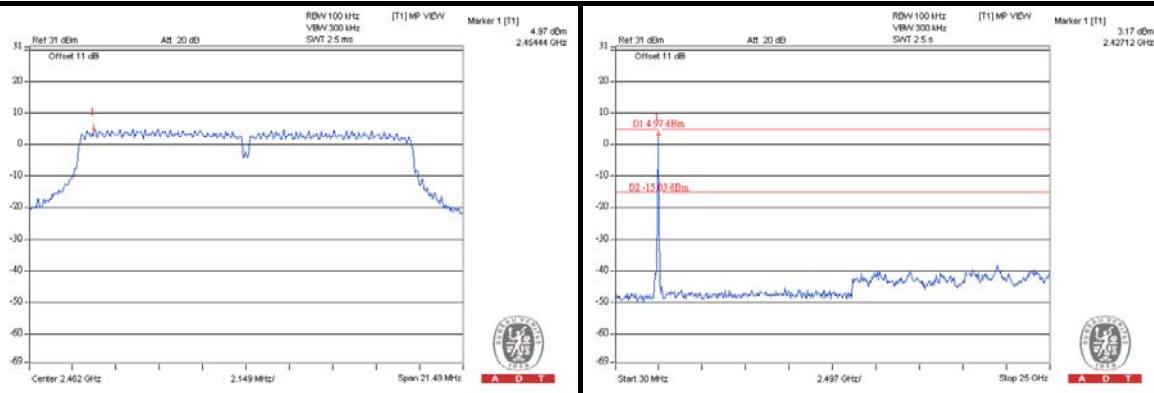





A D T

802.11n (20MHz)


CH 1

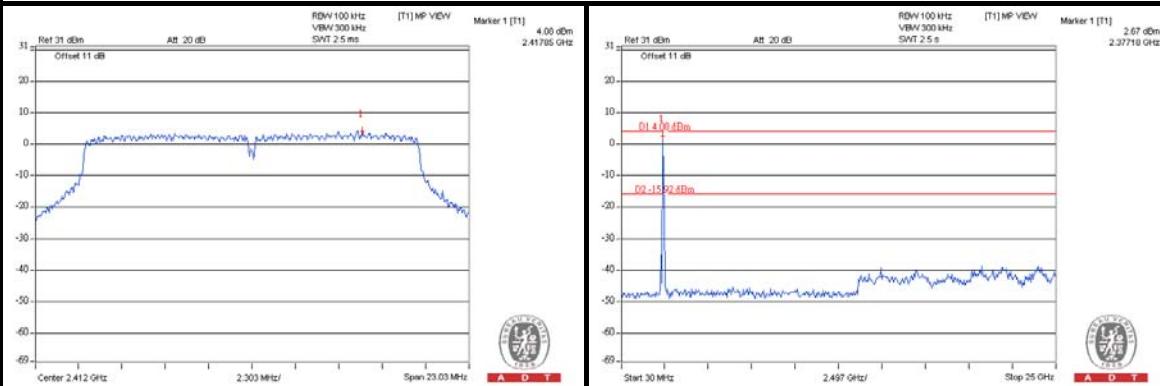

CH 6

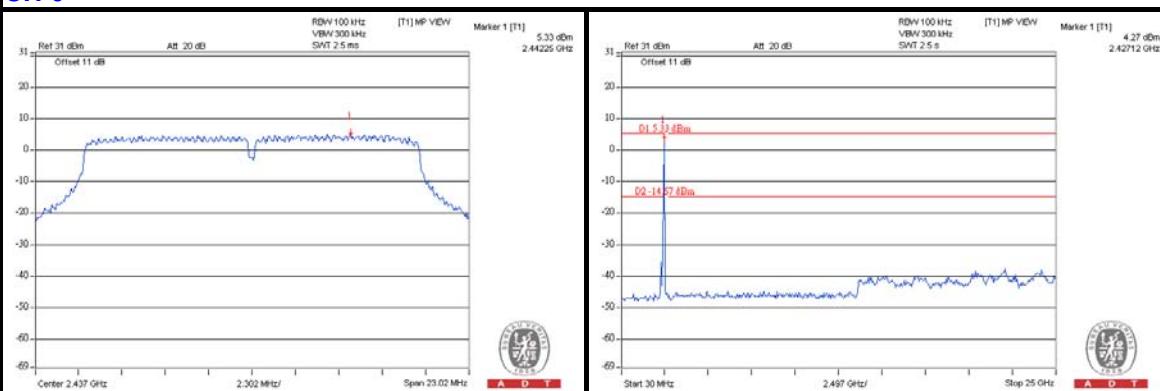


CH 11

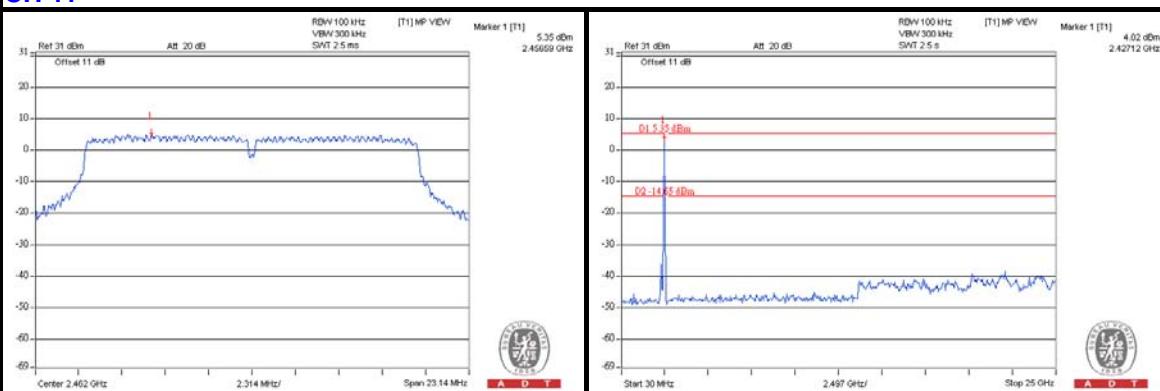


802.11n (40MHz)


CH 3

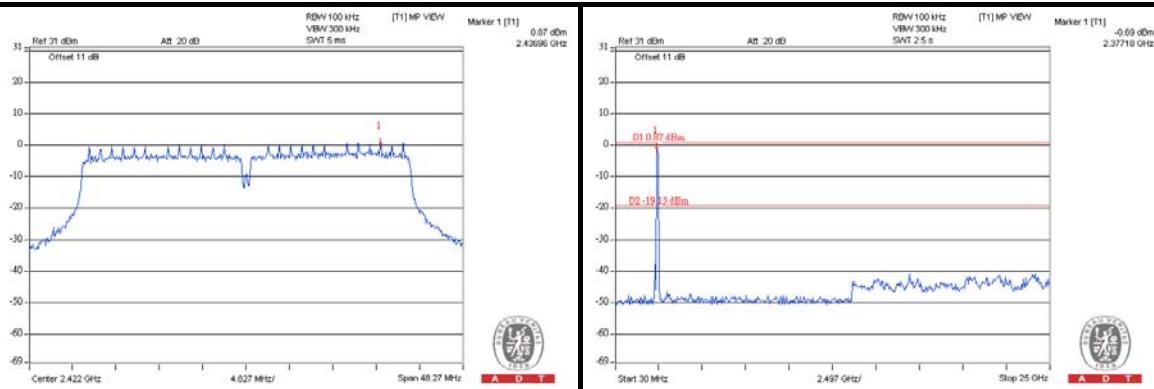

CH 6

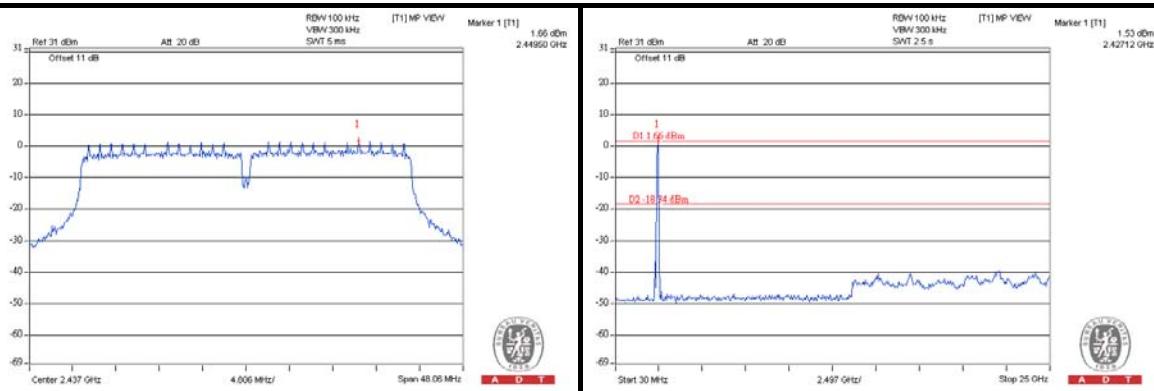

CH 9

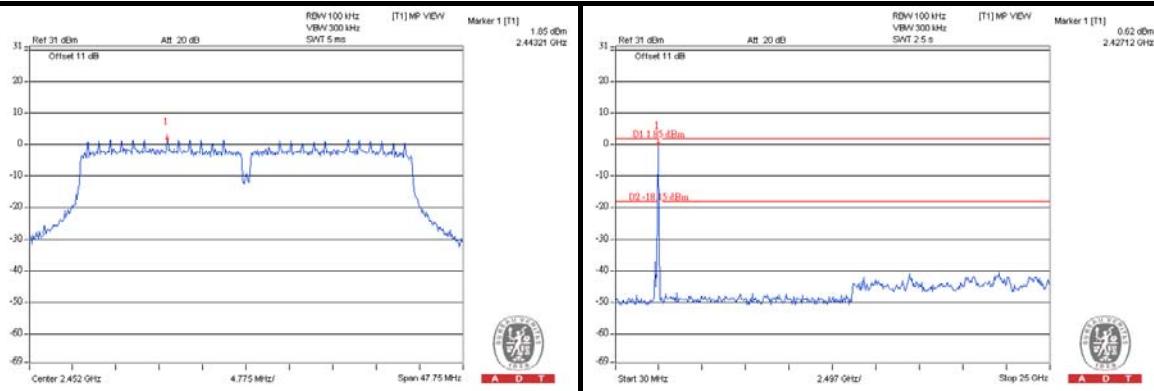



A D T

5. TEST TYPES AND RESULTS (FOR 5.0GHz BAND)

5.1 RADIATED EMISSION MEASUREMENT

5.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_uV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

5.1.2 TEST INSTRUMENTS

Same as item 4.1.2.

5.1.3 TEST PROCEDURES

Same as item 4.1.3.

5.1.4 DEVIATION FROM TEST STANDARD

No deviation.

5.1.5 TEST SETUP

Same as item 4.1.5.

5.1.6 EUT OPERATING CONDITIONS

Same as 4.1.6.



A D T

5.1.7 TEST RESULTS

ABOVE 1GHz DATA: 802.11a

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 149		FREQUENCY RANGE 1 ~ 40GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH		TESTED BY Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	66.9 PK	85.1	-18.2	1.24 H	307	28.10	38.80
2	#5725.00	56.8 AV	75.0	-18.2	1.24 H	307	18.00	38.80
3	*5745.00	105.1 PK			1.00 H	318	66.30	38.80
4	*5745.00	95.0 AV			1.00 H	318	56.20	38.80
5	11490.00	60.6 PK	74.0	-13.4	1.03 H	176	10.50	50.10
6	11490.00	48.2 AV	54.0	-5.8	1.03 H	176	-1.90	50.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	74.7 PK	92.3	-17.6	1.11 V	21	35.90	38.80
2	#5725.00	65.1 AV	82.7	-17.6	1.11 V	21	26.30	38.80
3	*5745.00	112.3 PK			1.22 V	8	73.50	38.80
4	*5745.00	102.7 AV			1.22 V	8	63.90	38.80
5	11490.00	66.1 PK	74.0	-7.9	2.23 V	162	16.00	50.10
6	11490.00	52.9 AV	54.0	-1.1	2.23 V	162	2.80	50.10

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 157	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	53.4 PK	85.2	-31.8	1.19 H	273	14.60	38.80
2	#5725.00	43.6 AV	75.4	-31.8	1.19 H	273	4.80	38.80
3	*5785.00	105.2 PK			1.02 H	323	66.30	38.90
4	*5785.00	95.4 AV			1.02 H	323	56.50	38.90
5	11570.00	62.5 PK	74.0	-11.5	1.07 H	182	12.50	50.00
6	11570.00	49.3 AV	54.0	-4.7	1.07 H	182	-0.70	50.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	58.6 PK	92.8	-34.2	1.16 V	27	19.80	38.80
2	#5725.00	49.2 AV	83.4	-34.2	1.16 V	27	10.40	38.80
3	*5785.00	112.8 PK			1.25 V	13	73.90	38.90
4	*5785.00	103.4 AV			1.25 V	13	64.50	38.90
5	11570.00	65.5 PK	74.0	-8.5	1.92 V	273	15.50	50.00
6	11570.00	52.5 AV	54.0	-1.5	1.92 V	273	2.50	50.00

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 165		FREQUENCY RANGE 1 ~ 40GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH		TESTED BY Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	105.4 PK			1.00 H	331	66.50	38.90
2	*5825.00	95.4 AV			1.00 H	331	56.50	38.90
3	#5850.00	61.7 PK	85.4	-23.7	1.07 H	291	22.70	39.00
4	#5850.00	51.7 AV	75.4	-23.7	1.07 H	291	12.70	39.00
5	11650.00	62.3 PK	74.0	-11.7	1.00 H	194	12.30	50.00
6	11650.00	49.1 AV	54.0	-4.9	1.00 H	194	-0.90	50.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	112.6 PK			1.14 V	7	73.70	38.90
2	*5825.00	102.9 AV			1.14 V	7	64.00	38.90
3	#5850.00	66.2 PK	92.6	-26.4	1.20 V	14	27.20	39.00
4	#5850.00	56.5 AV	82.9	-26.4	1.20 V	14	17.50	39.00
5	11650.00	65.9 PK	74.0	-8.1	1.97 V	204	15.90	50.00
6	11650.00	52.6 AV	54.0	-1.4	1.97 V	204	2.60	50.00

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 149		FREQUENCY RANGE 1 ~ 40GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH		TESTED BY Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	71.6 PK	90.7	-19.1	1.19 H	251	32.80	38.80
2	#5725.00	61.3 AV	80.4	-19.1	1.19 H	251	22.50	38.80
3	*5745.00	110.7 PK			1.26 H	267	71.90	38.80
4	*5745.00	100.4 AV			1.26 H	267	61.60	38.80
5	11490.00	61.4 PK	74.0	-12.6	1.00 H	207	11.30	50.10
6	11490.00	48.2 AV	54.0	-5.8	1.00 H	207	-1.90	50.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	76.1 PK	91.8	-15.7	1.24 V	2	37.30	38.80
2	#5725.00	66.0 AV	81.7	-15.7	1.24 V	2	27.20	38.80
3	*5745.00	111.8 PK			1.18 V	26	73.00	38.80
4	*5745.00	101.7 AV			1.18 V	26	62.90	38.80
5	11490.00	66.3 PK	74.0	-7.7	1.48 V	56	16.20	50.10
6	11490.00	52.4 AV	54.0	-1.6	1.48 V	56	2.30	50.10

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 157	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	55.4 PK	89.7	-34.3	1.00 H	211	16.60	38.80
2	#5725.00	45.9 AV	80.2	-34.3	1.00 H	211	7.10	38.80
3	*5785.00	109.7 PK			1.07 H	238	70.80	38.90
4	*5785.00	100.2 AV			1.07 H	238	61.30	38.90
5	11570.00	62.9 PK	74.0	-11.1	1.00 H	194	12.90	50.00
6	11570.00	50.3 AV	54.0	-3.7	1.00 H	194	0.30	50.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	59.7 PK	92.6	-32.9	1.00 V	37	20.90	38.80
2	#5725.00	49.8 AV	82.7	-32.9	1.00 V	37	11.00	38.80
3	*5785.00	112.6 PK			1.08 V	14	73.70	38.90
4	*5785.00	102.7 AV			1.08 V	14	63.80	38.90
5	11570.00	66.4 PK	74.0	-7.6	1.64 V	62	16.40	50.00
6	11570.00	52.7 AV	54.0	-1.3	1.64 V	62	2.70	50.00

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 165	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	110.0 PK			1.05 H	241	71.10	38.90
2	*5825.00	100.9 AV			1.05 H	241	62.00	38.90
3	#5850.00	64.2 PK	90.0	-25.8	1.00 H	217	25.20	39.00
4	#5850.00	55.1 AV	80.9	-25.8	1.00 H	217	16.10	39.00
5	11650.00	62.7 PK	74.0	-11.3	1.00 H	279	12.70	50.00
6	11650.00	48.3 AV	54.0	-5.7	1.00 H	279	-1.70	50.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	113.4 PK			1.28 V	20	74.50	38.90
2	*5825.00	103.1 AV			1.28 V	20	64.20	38.90
3	#5850.00	68.8 PK	93.4	-24.6	1.12 V	349	29.80	39.00
4	#5850.00	58.5 AV	83.1	-24.6	1.12 V	349	19.50	39.00
5	11650.00	66.2 PK	74.0	-7.8	1.36 V	69	16.20	50.00
6	11650.00	52.5 AV	54.0	-1.5	1.36 V	69	2.50	50.00

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

802.11n (40MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		FREQUENCY RANGE		1 ~ 40GHz
INPUT POWER (SYSTEM)		DETECTOR FUNCTION		Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		TESTED BY		Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	86.3 PK	89.6	-3.3	1.00 H	155	47.50	38.80
2	#5725.00	66.0 AV	79.8	-13.8	1.00 H	155	27.20	38.80
3	*5755.00	109.6 PK			1.00 H	155	70.80	38.80
4	*5755.00	99.8 AV			1.00 H	155	61.00	38.80
5	11510.00	63.6 PK	74.0	-10.4	1.00 H	171	13.50	50.10
6	11510.00	49.2 AV	54.0	-4.8	1.00 H	171	-0.90	50.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	86.5 PK	89.6	-3.1	1.16 V	124	47.70	38.80
2	#5725.00	73.8 AV	80.0	-6.2	1.16 V	124	35.00	38.80
3	*5755.00	109.6 PK			1.41 V	124	70.80	38.80
4	*5755.00	100.0 AV			1.41 V	124	61.20	38.80
5	11510.00	65.3 PK	74.0	-8.7	1.00 V	217	15.20	50.10
6	11510.00	51.3 AV	54.0	-2.7	1.00 V	217	1.20	50.10

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 159		FREQUENCY RANGE 1 ~ 40GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH		TESTED BY Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	108.7 PK			1.00 H	157	69.80	38.90
2	*5795.00	98.8 AV			1.00 H	157	59.90	38.90
3	#5850.00	65.3 PK	88.7	-23.4	1.00 H	156	26.30	39.00
4	#5850.00	47.5 AV	78.8	-31.3	1.00 H	156	8.50	39.00
5	11590.00	61.0 PK	74.0	-13.0	1.00 H	170	11.00	50.00
6	11590.00	48.1 AV	54.0	-5.9	1.00 H	170	-1.90	50.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	109.9 PK			1.65 V	139	71.00	38.90
2	*5795.00	100.0 AV			1.65 V	139	61.10	38.90
3	#5850.00	77.1 PK	89.9	-12.8	1.49 V	240	38.10	39.00
4	#5850.00	63.3 AV	80.0	-16.7	1.49 V	240	24.30	39.00
5	11590.00	65.0 PK	74.0	-9.0	1.06 V	305	15.00	50.00
6	11590.00	53.0 AV	54.0	-1.0	1.06 V	305	3.00	50.00

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

BELOW 1GHz WORST-CASE DATA : 802.11n (40MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL			
CHANNEL		Channel 151		FREQUENCY RANGE	
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION	
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH		TEST MODE	
TESTED BY		Haru Yang			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.68	27.8 QP	40.0	-12.2	2.00 H	37	14.50	13.30
2	156.28	30.9 QP	43.5	-12.6	1.25 H	229	16.80	14.10
3	191.28	33.3 QP	43.5	-10.2	1.75 H	91	21.60	11.70
4	232.11	37.2 QP	46.0	-8.8	1.50 H	252	24.90	12.30
5	624.85	34.9 QP	46.0	-11.1	1.50 H	5	12.60	22.30
6	875.67	32.3 QP	46.0	-13.7	1.00 H	197	5.80	26.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	35.73	38.9 QP	40.0	-1.1	1.00 V	169	25.90	13.00
2	193.22	32.8 QP	43.5	-10.7	1.25 V	243	21.30	11.50
3	234.05	36.8 QP	46.0	-9.2	1.50 V	174	24.40	12.40
4	624.85	34.8 QP	46.0	-11.2	1.00 V	243	12.50	22.30
5	850.39	30.1 QP	46.0	-15.9	1.25 V	247	3.90	26.20
6	875.67	32.3 QP	46.0	-13.7	1.00 V	216	5.80	26.50

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 151	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TEST MODE	B
TESTED BY	Haru Yang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.12	35.1 QP	40.0	-4.9	1.50 H	204	21.50	13.60
2	99.89	26.3 QP	43.5	-17.2	2.00 H	272	16.90	9.40
3	156.28	32.6 QP	43.5	-10.9	1.00 H	18	18.50	14.10
4	235.99	33.6 QP	46.0	-12.4	1.25 H	126	21.10	12.50
5	624.85	36.5 QP	46.0	-9.5	1.25 H	213	14.20	22.30
6	850.39	36.8 QP	46.0	-9.2	1.00 H	18	10.60	26.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	55.18	37.9 QP	40.0	-2.1	1.75 V	13	24.20	13.70
2	156.28	30.7 QP	43.5	-12.8	1.00 V	112	16.60	14.10
3	235.99	31.8 QP	46.0	-14.2	2.00 V	182	19.30	12.50
4	374.04	23.2 QP	46.0	-22.8	1.25 V	281	6.30	16.90
5	624.85	29.2 QP	46.0	-16.8	1.50 V	79	6.90	22.30
6	850.39	34.2 QP	46.0	-11.8	1.25 V	163	8.00	26.20

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

5.2 CONDUCTED EMISSION MEASUREMENT

5.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

5.2.2 TEST INSTRUMENTS

Same as item 4.2.2.

5.2.3 TEST PROCEDURES

Same as item 4.2.3.

5.2.4 DEVIATION FROM TEST STANDARD

No deviation.

5.2.5 TEST SETUP

Same as item 4.2.5.

5.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6


5.2.7 TEST RESULTS

CONDUCTED WORST-CASE DATA : 802.11n (40MHz)

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	A		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
			Factor	[dB (uV)]	[dB (uV)]	[dB (uV)]	(dB)			
		[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.15391	0.17	58.31	45.74	58.48	45.91	65.79	55.79	-7.31	-9.88
2	0.19297	0.17	53.04	41.49	53.21	41.66	63.91	53.91	-10.70	-12.25
3	0.50156	0.21	48.12	41.84	48.33	42.05	56.00	46.00	-7.67	-3.95
4	2.19922	0.31	42.06	36.22	42.37	36.53	56.00	46.00	-13.63	-9.47
5	4.14844	0.39	39.61	32.65	40.00	33.04	56.00	46.00	-16.00	-12.96
6	9.23047	0.47	39.54	32.42	40.01	32.89	60.00	50.00	-19.99	-17.11


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

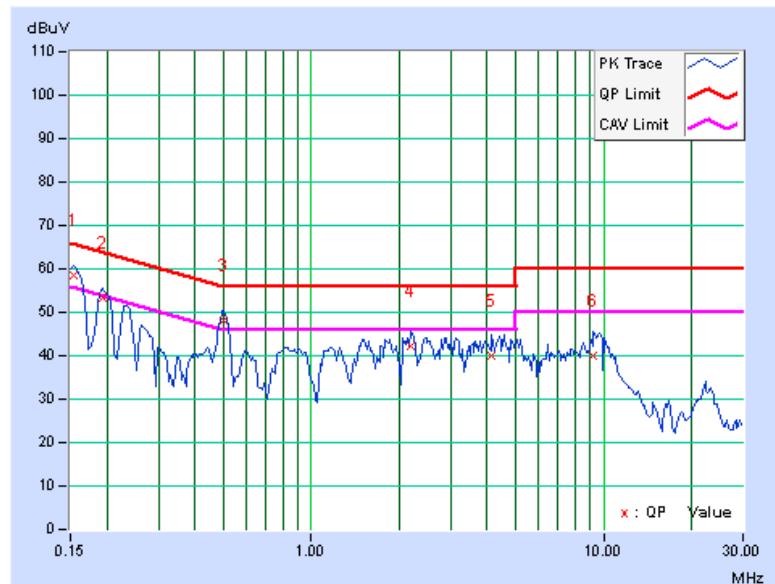

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	A		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.15781	0.17	57.55	44.89	57.72	45.06	65.58	55.58	-7.86	-10.52
2	0.19687	0.15	52.02	39.74	52.17	39.89	63.74	53.74	-11.57	-13.85
3	0.49375	0.18	46.68	37.62	46.86	37.80	56.10	46.10	-9.24	-8.30
4	2.48438	0.30	41.67	35.92	41.97	36.22	56.00	46.00	-14.03	-9.78
5	4.21094	0.39	41.77	35.72	42.16	36.11	56.00	46.00	-13.84	-9.89
6	9.66016	0.56	45.77	40.51	46.33	41.07	60.00	50.00	-13.67	-8.93


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

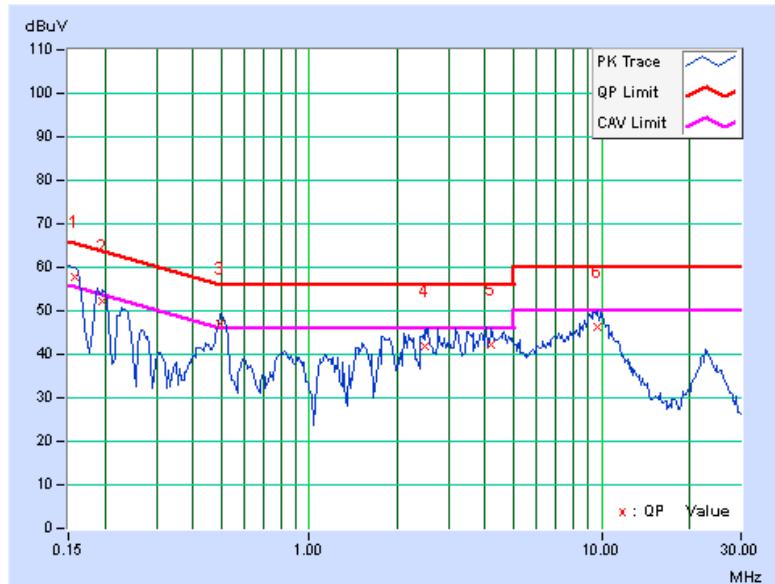

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
			Factor	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	(dB)	
		[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.18547	0.17	38.92	32.31	39.09	32.48	64.24	54.24	-25.15	-21.76
2	0.42734	0.20	35.49	20.19	35.69	20.39	57.30	47.30	-21.61	-26.91
3	0.93516	0.23	38.65	26.76	38.88	26.99	56.00	46.00	-17.12	-19.01
4	1.90234	0.29	43.86	29.28	44.15	29.57	56.00	46.00	-11.85	-16.43
5	4.75781	0.40	37.71	25.04	38.11	25.44	56.00	46.00	-17.89	-20.56
6	5.48438	0.41	37.81	24.39	38.22	24.80	60.00	50.00	-21.78	-25.20


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

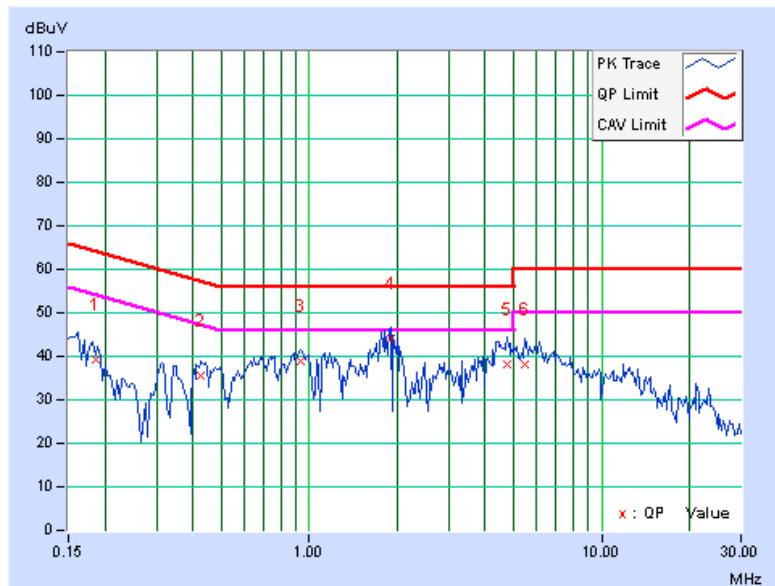

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.18516	0.16	38.80	25.52	38.96	25.68	64.25	54.25	-25.29	-28.57
2	0.93125	0.19	32.53	17.51	32.72	17.70	56.00	46.00	-23.28	-28.30
3	1.87109	0.26	38.27	19.06	38.53	19.32	56.00	46.00	-17.47	-26.68
4	3.21484	0.34	35.75	16.79	36.09	17.13	56.00	46.00	-19.91	-28.87
5	4.59766	0.40	35.13	17.88	35.53	18.28	56.00	46.00	-20.47	-27.72
6	5.89844	0.44	37.24	19.48	37.68	19.92	60.00	50.00	-22.32	-30.08

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

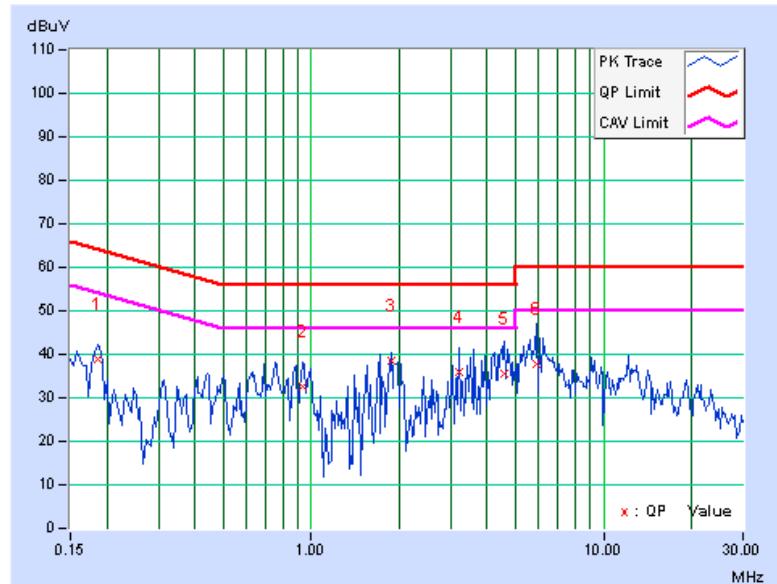



A D T

5.3 6dB BANDWIDTH MEASUREMENT

5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

5.3.2 TEST SETUP

Same as item 4.3.2.

5.3.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.3.4 TEST PROCEDURE

Same as item 4.3.4.

5.3.5 DEVIATION FROM TEST STANDARD

No deviation.

5.3.6 EUT OPERATING CONDITIONS

Same as item 4.3.6.



A D T

5.3.7 TEST RESULTS

802.11a

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
149	5745	16.61	16.56	0.5	PASS
157	5785	16.56	16.56	0.5	PASS
165	5825	16.59	16.56	0.5	PASS

802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
149	5745	17.72	17.81	0.5	PASS
157	5785	17.73	17.78	0.5	PASS
165	5825	17.76	17.87	0.5	PASS

802.11n (40MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
151	5755	36.50	36.58	0.5	PASS
159	5795	36.61	36.89	0.5	PASS



A D T

5.4 CONDUCTED OUTPUT POWER

5.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 5725 –5850 MHz bands: 1 Watt (30dBm)

5.4.2 TEST SETUP

Same as Item 4.4.2.

5.4.3 INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.4.4 TEST PROCEDURES

Same as Item 4.4.4.

5.4.5 DEVIATION FROM TEST STANDARD

No deviation.

5.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.



A D T

5.4.7 TEST RESULTS

802.11a

CHAN.	FREQUE NCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
149	5745	23.22	22.84	402.2	26.0	30	PASS
157	5785	23.42	22.97	417.9	26.2	30	PASS
165	5825	22.81	22.85	383.7	25.8	30	PASS

NOTE: Directional gain = 2dBi + 10log(2) = 5.01dBi < 6dBi , so the limit no need to reduced.

802.11n (20MHz)

CHAN.	FREQUE NCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
149	5745	23.14	22.81	397.0	26.0	30	PASS
157	5785	23.71	22.86	428.2	26.3	30	PASS
165	5825	22.89	22.74	382.5	25.8	30	PASS

802.11n (40MHz)

CHAN.	FREQUE NCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
151	5755	24.02	23.87	496.1	27.0	30	PASS
159	5795	23.34	22.83	407.6	26.1	30	PASS



A D T

5.5 POWER SPECTRAL DENSITY MEASUREMENT

5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

5.5.2 TEST SETUP

Same as item 4.5.2.

5.5.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.5.4 TEST PROCEDURE.

Same as item 4.5.4.

5.5.5 DEVIATION FROM TEST STANDARD

No deviation.

5.5.6 EUT OPERATING CONDITION

Same as item 4.3.6.



A D T

5.5.7 TEST RESULTS

802.11a

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	149	5745	3.82	-11.41	3.01	-8.40	8	PASS
	157	5785	4.18	-11.05	3.01	-8.04	8	PASS
	165	5825	3.41	-11.82	3.01	-8.81	8	PASS
1	149	5745	3.63	-11.60	3.01	-8.59	8	PASS
	157	5785	3.91	-11.32	3.01	-8.31	8	PASS
	165	5825	3.79	-11.44	3.01	-8.43	8	PASS

NOTE: Directional gain = 2dBi + 10log(2) = 5.01dB < 6dB , so the limit no need to reduced.

802.11n (20MHz)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	149	5745	3.91	-11.32	3.01	-8.31	8	PASS
	157	5785	4.69	-10.54	3.01	-7.53	8	PASS
	165	5825	3.71	-11.52	3.01	-8.51	8	PASS
1	149	5745	3.79	-11.44	3.01	-8.43	8	PASS
	157	5785	3.95	-11.28	3.01	-8.27	8	PASS
	165	5825	3.84	-11.39	3.01	-8.38	8	PASS

802.11n (40MHz)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	151	5755	2.06	-13.17	3.01	-10.16	8	PASS
	159	5795	1.23	-14.00	3.01	-10.99	8	PASS
1	151	5755	3.88	-11.35	3.01	-8.34	8	PASS
	159	5795	2.77	-12.46	3.01	-9.45	8	PASS



A D T

5.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT

5.6.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

5.6.2 TEST SETUP

Same as Item 4.6.2

5.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.6.4 TEST PROCEDURE

Same as Item 4.6.4

5.6.5 DEVIATION FROM TEST STANDARD

No deviation.

5.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

5.6.7 TEST RESULTS

The conducted emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit. Only worst data of each operating mode is presented.


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T

802.11a


CH 149

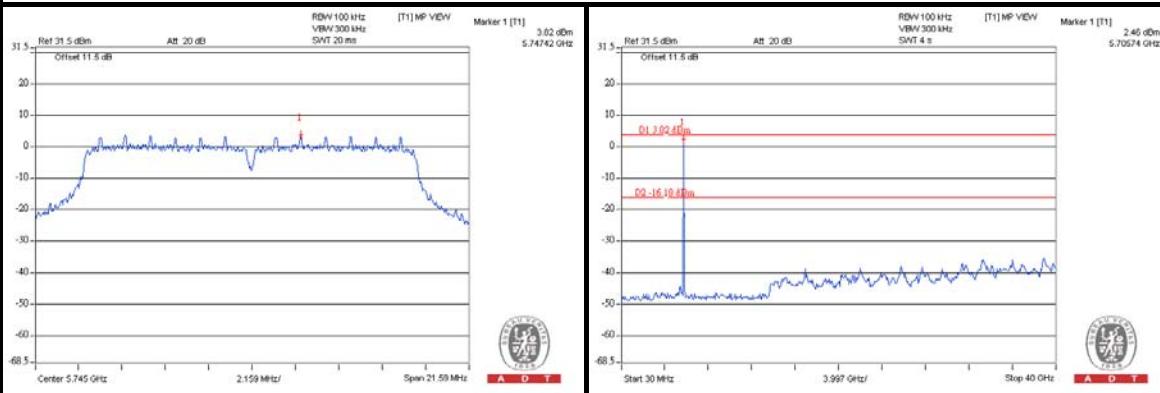

CH 157

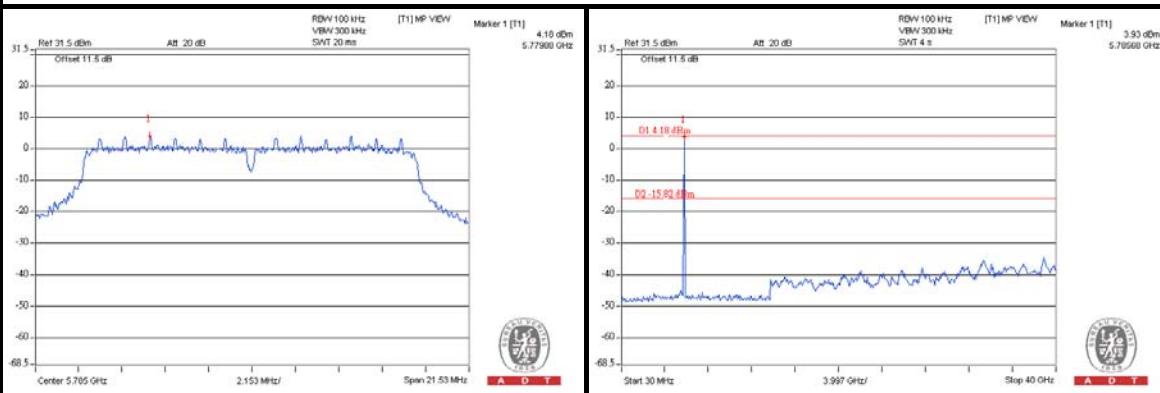

CH 165

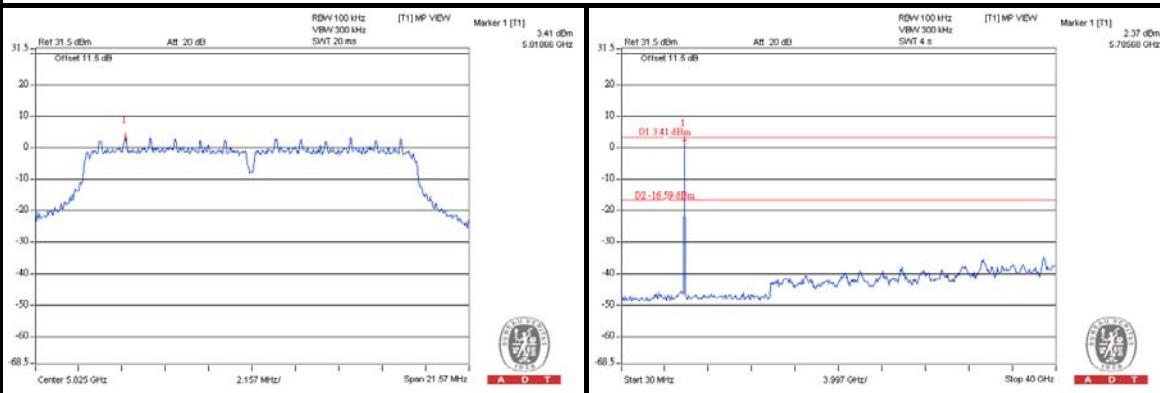





A D T

802.11n (20MHz)


CH 149

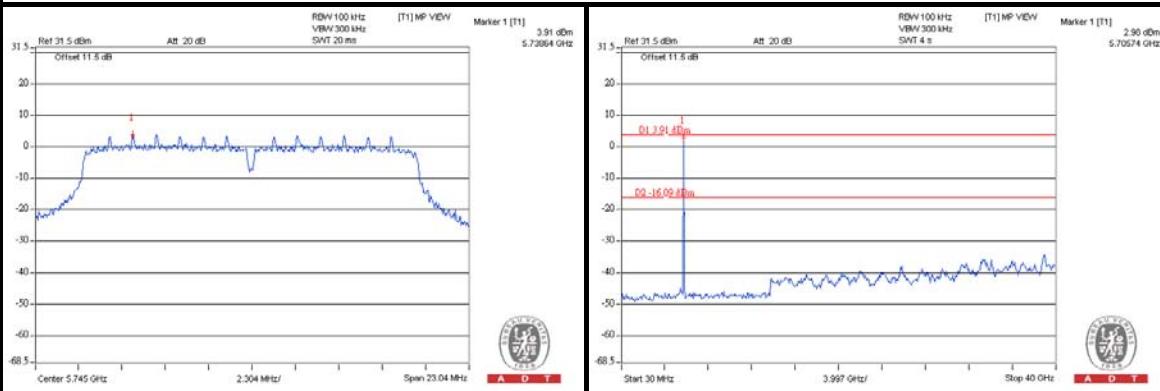

CH 157

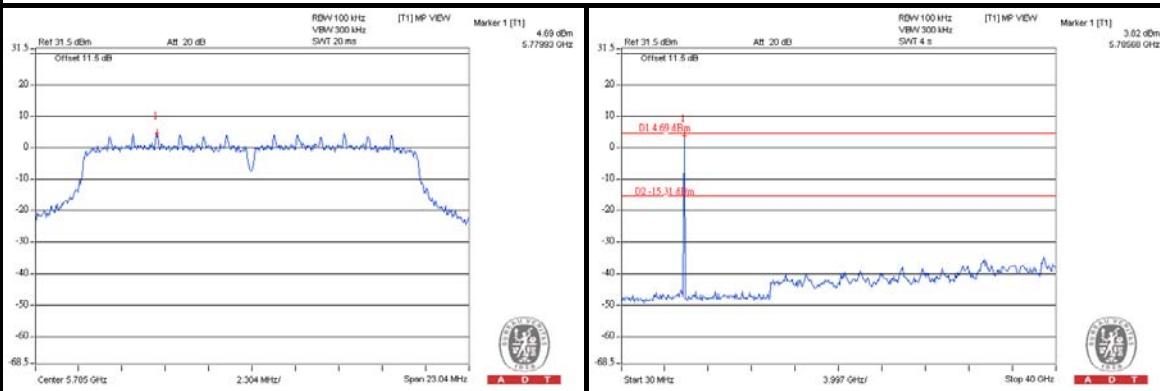

CH 165

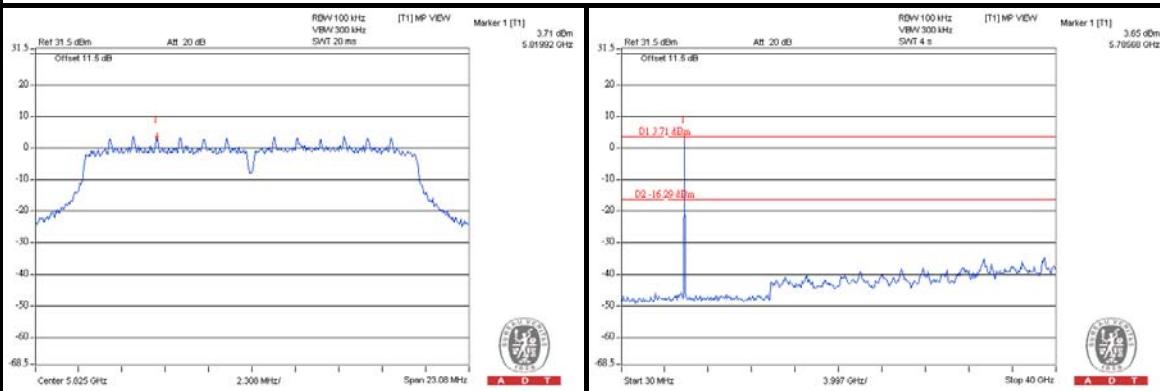





A D T

802.11n (40MHz)

CH 151

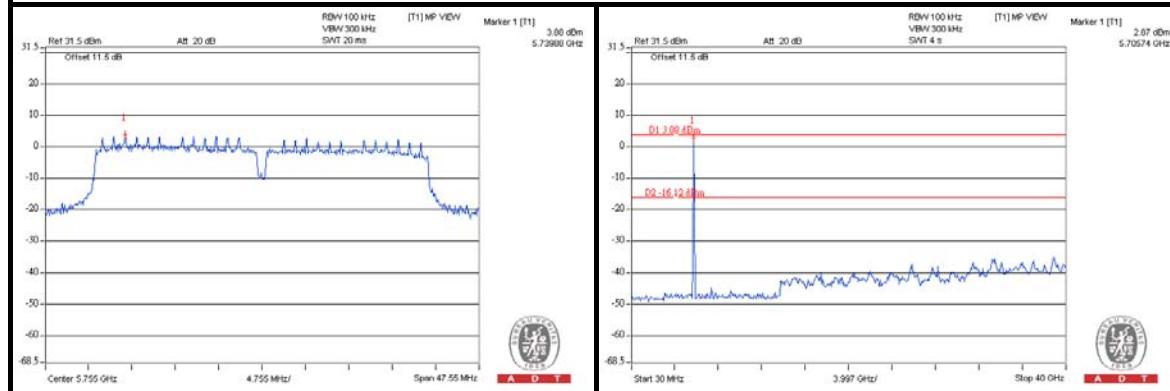

CH 159

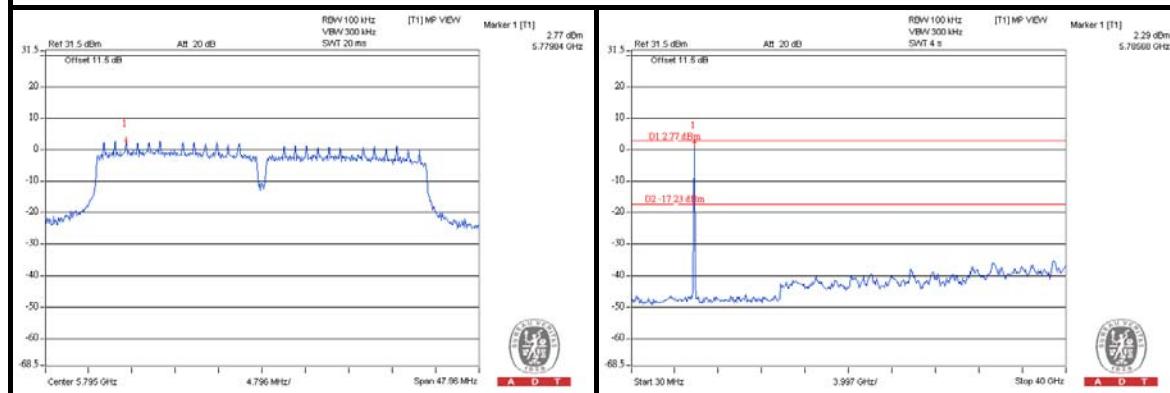



A D T

6. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

7. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation and authorization certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5.phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF Lab

Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab

Tel: 886-3-3183232
Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

8. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---