



**FCC CFR47 PART 15 SUBPART E
INDUSTRY CANADA RSS-210 ISSUE 8**

CERTIFICATION TEST REPORT

FOR

**Dual-Band 802.11 a/b/g/n Industrial Access Point with Integrated DOCSIS 3.0
Modem**

MODEL NUMBER: ZoneFlex7761-CM

**FCC ID: S9GZF7761CM
IC: 5912A-ZF7761CM**

REPORT NUMBER: 10U13475-3, Revision C

ISSUE DATE: JUNE 06, 2011

Prepared for
**RUCKUS WIRELESS
880 WEST MAUDE AVE., SUITE 101
SUNNYVALE, CA 94085, U.S.A.**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	03/02/11	Initial Issue	F. Ibrahim
A	03/03/11	Inserted the conducted spurious data for the notch band of 5.6-5.65 GHz	F. Ibrahim
B	03/21/11	Revised output power values in sections 7.4.2, section 7.6.2, section 7.7.2, section 7.8.2, and section 7.9.2. Revised MPE section.	F. Ibrahim
C	06/06/11	Revised sections 7.4.6, 7.5.2, 7.5.4, 7.5.6, 7.6.2, 7.6.4, 7.6.6, 7.7.6, 7.8.2, 7.8.4, 7.8.6, 7.9.2, 7.9.4, and 7.9.6 for limits and test procedure paragraphs.	F. Ibrahim

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION	7
4.2. SAMPLE CALCULATION	7
4.3. MEASUREMENT UNCERTAINTY	7
5. EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF EUT	8
5.2. MAXIMUM OUTPUT POWER	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	9
5.4. SOFTWARE AND FIRMWARE	9
5.5. WORST-CASE CONFIGURATION AND MODE	9
5.6. DESCRIPTION OF TEST SETUP	10
6. TEST AND MEASUREMENT EQUIPMENT	12
7. ANTENNA PORT TEST RESULTS	13
7.1. 802.11a THREE CHAIN LEGACY MODE IN THE 5.2 GHz BAND	13
7.1.1. 26 dB and 99% BANDWIDTH	13
7.1.2. OUTPUT POWER	23
7.1.3. AVERAGE POWER	34
7.1.4. PEAK POWER SPECTRAL DENSITY	35
7.1.5. PEAK EXCURSION	40
7.1.6. CONDUCTED SPURIOUS EMISSIONS	51
7.2. 802.11n THREE CHAINS HT20 MODE IN THE 5.2 GHz BAND	55
7.2.1. 26 dB and 99% BANDWIDTH	55
7.2.2. OUTPUT POWER	65
7.2.3. AVERAGE POWER	76
7.2.4. PEAK POWER SPECTRAL DENSITY	77
7.2.5. PEAK EXCURSION	81
7.2.6. CONDUCTED SPURIOUS EMISSIONS	92
7.3. 802.11n THREE CHAINS HT40 MODE IN THE 5.2 GHz BAND	96
7.3.1. 26 dB and 99% BANDWIDTH	96
7.3.2. OUTPUT POWER	103
7.3.3. AVERAGE POWER	111
7.3.4. PEAK POWER SPECTRAL DENSITY	112
7.3.5. PEAK EXCURSION	115
7.3.6. CONDUCTED SPURIOUS EMISSIONS	123
7.4. 802.11a THREE CHAINS LEGACY MODE IN THE 5.3 GHz BAND	126

7.4.1. 26 dB and 99% BANDWIDTH 126
7.4.2. OUTPUT POWER 136
7.4.3. AVERAGE POWER 147
7.4.4. PEAK POWER SPECTRAL DENSITY 148
7.4.5. PEAK EXCURSION 153
7.4.6. CONDUCTED SPURIOUS EMISSIONS 164
7.5. 802.11n THREE CHAIN HT20 MODE IN THE 5.3 GHz BAND 168
7.5.1. 26 dB and 99% BANDWIDTH 168
7.5.2. OUTPUT POWER 178
7.5.3. AVERAGE POWER 189
7.5.4. PEAK POWER SPECTRAL DENSITY 190
7.5.5. PEAK EXCURSION 194
7.5.6. CONDUCTED SPURIOUS EMISSIONS 205
7.6. 802.11n THREE CHAINS HT40 MODE IN THE 5.3 GHz BAND 209
7.6.1. 26 dB and 99% BANDWIDTH 209
7.6.2. OUTPUT POWER 216
7.6.3. AVERAGE POWER 224
7.6.4. PEAK POWER SPECTRAL DENSITY 225
7.6.5. PEAK EXCURSION 229
7.6.6. CONDUCTED SPURIOUS EMISSIONS 237
7.7. 802.11a THREE CHAINS Legacy MODE IN THE 5.6 GHz BAND 240
7.7.1. 26 dB and 99% BANDWIDTH 240
7.7.2. OUTPUT POWER 250
7.7.3. AVERAGE POWER 261
7.7.4. PEAK POWER SPECTRAL DENSITY 262
7.7.5. PEAK EXCURSION 267
7.7.6. CONDUCTED SPURIOUS EMISSIONS 278
7.8. 802.11n THREE CHAINS HT20 MODE IN THE 5.6 GHz BAND 288
7.8.1. 26 dB and 99% BANDWIDTH 288
7.8.2. OUTPUT POWER 298
7.8.3. AVERAGE POWER 309
7.8.4. PEAK POWER SPECTRAL DENSITY 310
7.8.5. PEAK EXCURSION 315
7.8.6. CONDUCTED SPURIOUS EMISSIONS 326
7.9. 802.11n THREE CHAINS HT40 MODE IN THE 5.6 GHz BAND 336
7.9.1. 26 dB and 99% BANDWIDTH 336
7.9.2. OUTPUT POWER 346
7.9.3. AVERAGE POWER 357
7.9.4. PEAK POWER SPECTRAL DENSITY 358
7.9.5. PEAK EXCURSION 363
7.9.6. CONDUCTED SPURIOUS EMISSIONS 374
7.10. RECEIVER CONDUCTED SPURIOUS EMISSIONS 381
8. RADIATED TEST RESULTS 391
8.1. LIMITS AND PROCEDURE 391
8.2. TRANSMITTER ABOVE 1 GHz 392
8.2.1. TX ABOVE 1 GHz FOR 802.11a MODE IN THE 5.2 GHz BAND 392
8.2.2. TX ABOVE 1 GHz FOR 802.11n HT20 MODE IN THE 5.2 GHz BAND 397


8.2.3. TX ABOVE 1 GHz FOR 802.11n HT40 MODE IN THE 5.2 GHz BAND 402
8.2.4. TX ABOVE 1 GHz FOR 802.11a MODE IN THE 5.3 GHz BAND 407
8.2.5. TX ABOVE 1 GHz FOR 802.11n HT20 MODE IN THE 5.3 GHz BAND 412
8.2.6. TX ABOVE 1 GHz FOR 802.11n HT40 MODE IN THE 5.3 GHz BAND 417
8.2.7. TX ABOVE 1 GHz FOR 802.11a MODE IN THE 5.6 GHz BAND 426
8.2.8. TX ABOVE 1 GHz FOR 802.11n HT20 MODE IN THE 5.6 GHz BAND 433
8.2.9. TX ABOVE 1 GHz FOR 802.11n HT40 MODE IN THE 5.6 GHz BAND 440
8.3. WORST-CASE BELOW 1 GHz..... 447
9. AC POWER LINE CONDUCTED EMISSIONS 451
10. DYNAMIC FREQUENCY SELECTION 455
10.1. OVERVIEW..... 455
10.1.1. LIMITS..... 455
10.1.2. TEST AND MEASUREMENT SYSTEM..... 458
10.1.3. SETUP OF EUT 461
10.1.4. DESCRIPTION OF EUT..... 462
10.2. RESULTS FOR 20 MHz BANDWIDTH..... 463
10.2.1. TEST CHANNEL 463
10.2.2. RADAR WAVEFORMS AND TRAFFIC..... 463
10.2.3. CHANNEL AVAILABILITY CHECK TIME..... 470
10.2.4. OVERLAPPING CHANNEL TESTS..... 475
10.2.5. MOVE AND CLOSING TIME..... 475
10.2.6. DETECTION BANDWIDTH..... 481
10.2.7. IN-SERVICE MONITORING..... 483
10.3. RESULTS FOR 40 MHz BANDWIDTH..... 490
10.3.1. TEST CHANNEL 490
10.3.2. RADAR WAVEFORMS AND TRAFFIC..... 490
10.3.3. CHANNEL AVAILABILITY CHECK TIME..... 497
10.3.4. OVERLAPPING CHANNEL TESTS..... 502
10.3.5. MOVE AND CLOSING TIME..... 502
10.3.6. NON-OCCUPANCY PERIOD..... 508
10.3.7. DETECTION BANDWIDTH..... 509
10.3.8. IN-SERVICE MONITORING..... 511
11. MAXIMUM PERMISSIBLE EXPOSURE 518
12. SETUP PHOTOS 522


12. SETUP PHOTOS

ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP





RADIATED RF MEASUREMENT SETUP

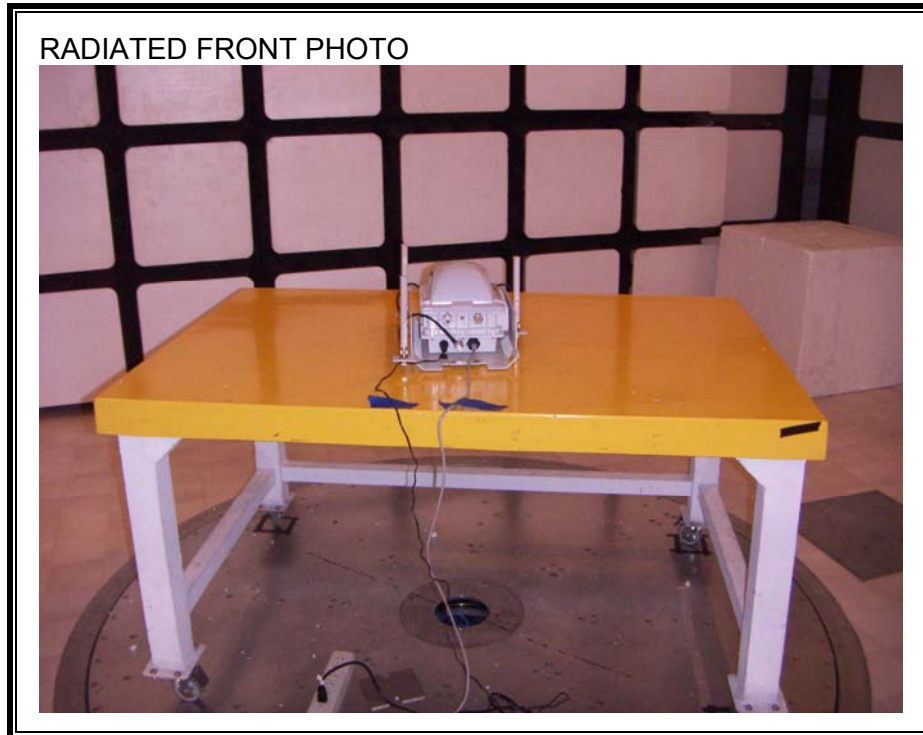

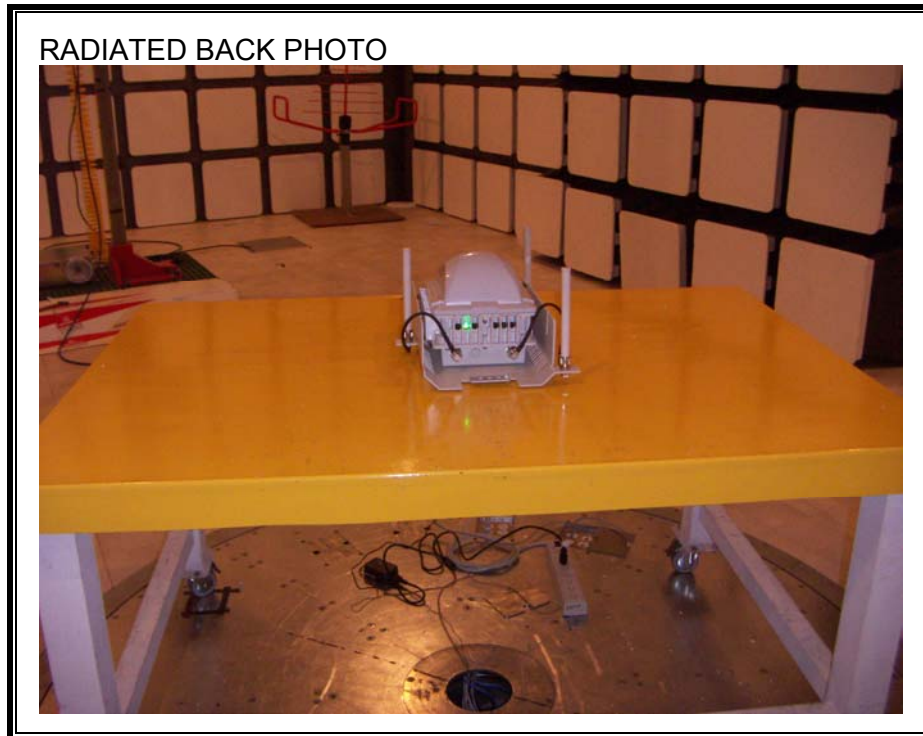


POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP

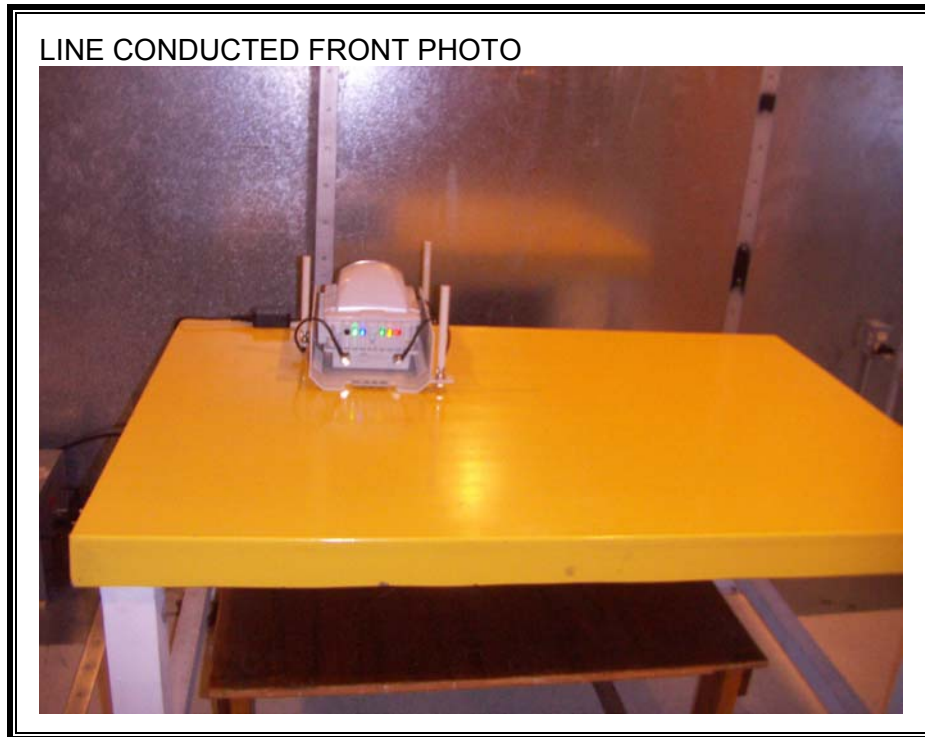

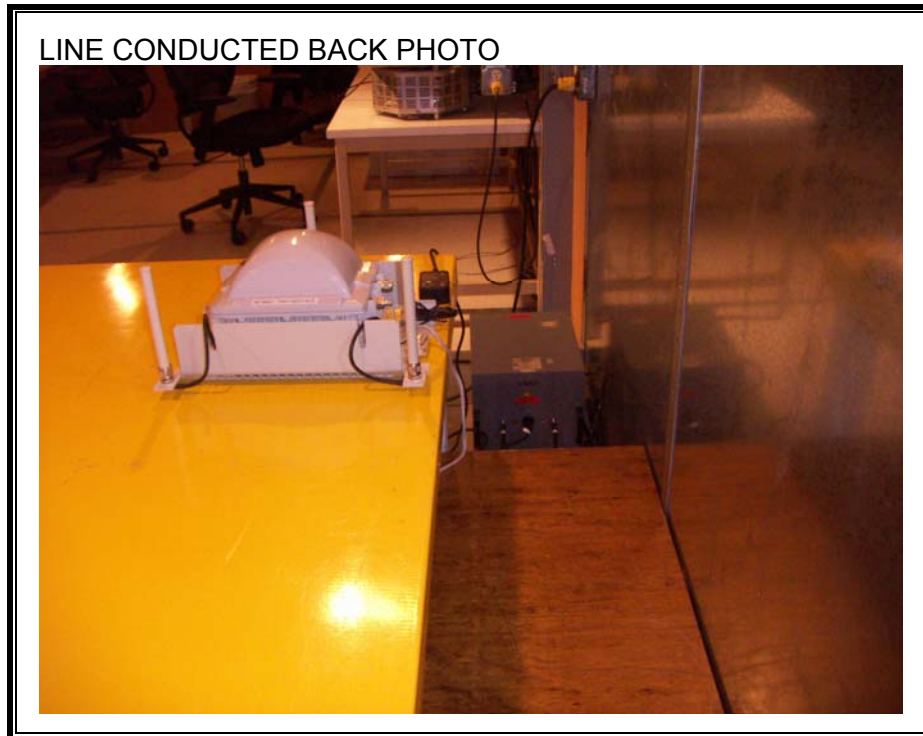

DYNAMIC FREQUENCY SELECTION MEASUREMENT SETUP

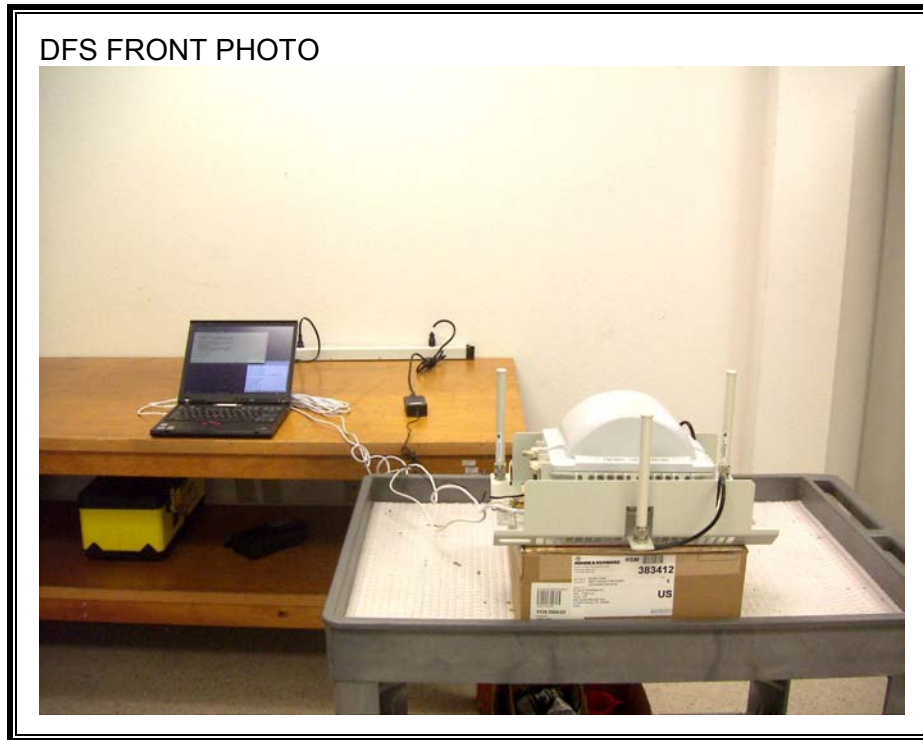



END OF REPORT