

TEST REPORT

No. AR16-0006655-01a

performed in accordance with

FCC Rules: Code of Federal Regulations (CFR) no. 47
Part 15 Subpart C Section 15.247

PRODUCT	Bluetooth low energy module
MODEL(s) TESTED	SPBTLE-1S
FCC ID	S9NSPBTLE1S
TRADE MARK(s)	STMicroelectronics

APPLICANT	STMicroelectronics S.r.l. ~ Centro Direzionale Colleoni - Palazzo Andromeda 3 I-20864 Agrate Brianza (MB)
------------------	--

Tested by	Roberto Radice <i>[Laboratory Technician]</i>	
Approved by	Giovanni Di Turi <i>[Laboratory manager]</i>	

Revision Sheet

Release No.	Date	Revision Description
Rev. 0	2017-03-08	First edition Digital signed - AR16-0006655-01a_TR_FCC 15.247_STMICROELECTRONICS_Modulo SPBTLE-1S

The results of tests and checks reported in this Test Report refer exclusively to the samples tested and described in the Report itself.
This Report shall not be reproduced partially the written approval of IMQ S.p.A..
The authenticity of this Test Report and its contents can be verified by contacting IMQ S.p.A., responsible for this Test Report.

1. GENERAL DATA

SAMPLE	
Samples received on	2017-01-19 (item sent and sampling by applicant)
IMQ reference samples	BEM 84563
Samples tested No.	2 (1 for radiated test and 1 with antenna connector for conducted test)
Object under analysis recognition	Not carried out Except where stated, characteristics of products were taken from client description and were not verified by the laboratory
Date of acceptance of test item	2016-11-28
TEST LOCATION	
Testing dates	2017-01-20 ÷ 2017-01-24
Testing laboratory	IMQ S.p.A. - Via Quintiliano, 43 – I-20138 Milano
ENVIRONMENTAL CONDITIONING	
Parameter	Measured
Ambient Temperature	20 ÷ 25 °C
Relative Humidity	50 ÷ 60 %
Atmospheric Pressure	900 ÷ 1000 mbar
REMARKS	
<p>Throughout this report a point is used as the decimal separator.</p> <p>The ability or reliability of this product to perform its intended function in a particular application has not been investigated.</p> <p>IMQ declines any responsibility derived from missing or wrong information provided aside by the applicant.</p>	

2. REFERENCE DOCUMENT

	DOCUMENT	DATE	TITLE
<input checked="" type="checkbox"/>	47 CFR Part 15	2015	Radio Frequency Device
<input checked="" type="checkbox"/>	ANSI C63.4	2014	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
<input checked="" type="checkbox"/>	ANSI C63.10	2013	American National Standard for Testing Unlicensed Wireless Devices

3. EQUIPMENT UNDER TEST (EUT) DETAILS

GENERAL DATA

MODEL (basic)	Description
SPBTLE-1S	Bluetooth low energy module

FCC ID	S9NSPBTLE1S
--------	-------------

Manufacturer	STMicroelectronics S.r.l. ~ Centro Direzionale Colleoni - Palazzo Andromeda 3 I-20864 Agrate Brianza (MB)
--------------	--


Equipment classification	According to the definition 15.3 (o) EUT is a Intentional Radiator operating within the bands 2400 ÷ 2483.5 MHz so it shall fulfill provisions of 47CFR Part 15 Subpart C – Intentional radiators – and Section 15.247
--------------------------	---

Type of equipment	Radio module
Operating frequency	2402 ÷ 2480 MHz
Equipment Class	DTS
Max radiated power	101.09 dBµV/m (at 3m. distance)
Modulation	GFSK
Channel Spacing	2MHz
Channel bandwidth	1MHz
Antenna	Ceramic antenna (Johanson Technology p/n 2450AT18A100E) peak gain: +0.5 dBi average gain: -0.5 dBi
Number of channels	40

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2402	2	2404	3	2406	4	2408
5	2410	6	2412	7	2414	8	2416
9	2418	10	2416	11	2422	12	2424
13	2426	14	2420	15	2430	16	2432
17	2434	18	2424	19	2438	20	2440
21	2442	22	2428	23	2446	24	2448
25	2450	26	2432	27	2454	28	2456
29	2458	30	2436	31	2462	32	2464
33	2466	34	2440	35	2470	36	2472
37	2474	38	2444	39	2478	40	2480

4. TEST CONFIGURATION OF EQUIPMENT UNDER TEST

EUT PORTS

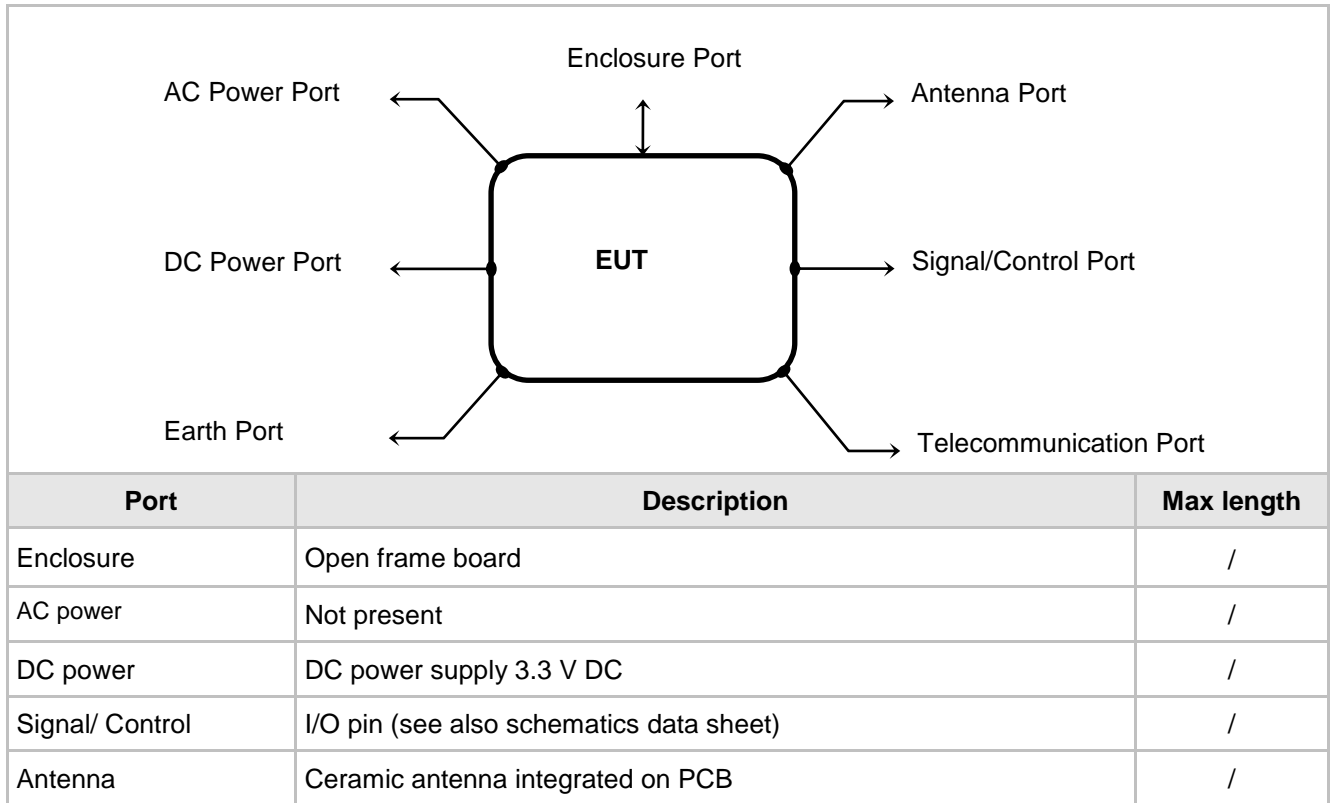

STATE OF THE EUT DURING TESTS

Ref.	Mode	Description
#1	Operating	<p>Continuous transmission (single channel transmission 2402MHz, 2440MHz, 2480MHz) with GFSK modulation.</p> <p>Signal pattern PRBS9</p> <p>The EUT is installed on module device board (dongle). The dongle is powered from the USB cable port.</p> <p>The EUT is in continuously transmitting with max. RF power setting (declared by applicant): +5dBm.</p>

SUPPORT EQUIPMENT

Defined as equipment needed for correct operation or loading of the EUT, but not considered as tested:

Equipment	Manufacturer	Model
Dongle furnished by manufacturer for supply and management of radio module	STMicroelectronics	PC44B V01
<p>Software used for testing: BlueNRG GUI (STM V.2.2.1)</p> <p>This software was running on PC connected via USB to the Dongle. It was used to enable the test operation mode #1</p>		

ELECTROMAGNETICALLY RELEVANT COMPONENTS

Component	No.	Manufacturer	Model
BLUENRG1 (U1)	1	STM	WLCSP34

RFI SUPPRESSION DEVICES

Component	No.	Manufacturer	Model
/	/	/	/

EMI PROTECTION DEVICES

Component	No.	Manufacturer	Model
/	/	/	/

EUT TECHNICAL DOCUMENTATION

Document	Reference
Datasheet – Preliminary data	SPBTLE-1S – February 2017
Schematic diagram	Doc. Ref. SPBTLE-1S – Drawing n° DM00347879.V1
Component layout	Doc. Ref. SPBTLE-1S – Drawing n° DM00347883-V1
Bill of Materials	Doc. Ref. SPBTLE-1S – Drawing n° DM00347880.V1

5. METHODS OF MEASUREMENT

All compliance measurements have been carried out using the procedures described in the standard ANSI C63.4-2014, ANSI C63.10-2013 and Section 15.31 of CFR47 Part 15 (2015) – Subpart A (General).

Additional test requirements have been adopted according to the reference Section indicated in the § 6 of this test report.

FREQUENCY RANGE INVESTIGATED

Conducted emission tests: from 150 kHz to 30MHz

Radiated emission tests: from 9 kHz to tenth harmonic of fundamental.

6. SUMMARY OF TEST RESULTS

POSSIBLE TEST CASE VERDICTS	
Test object does meet the requirement	PASS
Test object does not meet the requirement	FAIL
Test case does not apply to the test object	N.A.
Test not performed	N.P.

CFR47 Part 15	TITLE	RESULT
§ 15.203	Antenna Requirements	PASS
§ 15.247 (b)(4)(i)		
§ 15.207 (a)	Power Line Conducted Emission	PASS
§ 15.209 (a) (f)	Radiated Emission	PASS
§ 15.247 (d)	Out-of-band emissions	PASS
§ 15.247 (d)	100 kHz Bandwidth of Frequency Band Edges	PASS
§ 15.247 (a)	Frequency Hopping Spread Spectrum Specifications	
§ 15.247(a)	20 dB Bandwidth	N.A. ¹
§ 15.247(a)(1)	Carrier frequency (Hopping Channel) Separation	N.A. ¹
§ 15.247(a)(1)(iii)	Number of Hopping Channels Used	N.A. ¹
§ 15.247(a)(1)(iii)	Time occupancy (Dwell Time) of Each Ch. within a 0,4 x Nch (sec) Period	N.A. ¹
§ 15.247(a)(2)	6dB Minimum Bandwidth	PASS
§ 15.247(b)	Maximum Peak Output Power	
§ 15.247(b) (1)	Peak Output Power, radiated (EIRP)	N.A. ¹
§ 15.247(b) (3)	RF power output, radiated (EIRP)	PASS
§ 15.247(b) (4)	Antenna gain	
§ 15.247(c)	Operation with directional antenna gains greater than 6 dBi	N.A.
§ 15.247 (e)	Power Spectral Density	PASS
§ 15.247 (f)	Hybrid systems	N.A. ¹
§ 15.247 (g)	FHSS Transmission characteristics	N.A. ¹
§ 15.247 (h)	Recognition of occupied channel and multiple transmission system	N.A.
§ 15.247(i) (§ 47CFR 1.1307(b)(1))	RF humane exposure	PASS

Note 1	Not applicable for DTS equipment
---------------	----------------------------------

7. TEST RESULTS

7.1 ANTENNA REQUIREMENTS

TEST REQUIREMENT

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

Testing dates	2017-01-20
---------------	------------

Antenna specifications

N° of authorized antenna types	1
Antenna type	Integral Ceramic antenna on PCB
Maximum total gain	+0.5 dBi
External power amplifiers	Not present

TEST RESULT

The EUT meets the requirements of section 15.203 and 15.204

7.2 POWER LINE CONDUCTED EMISSION

TEST REQUIREMENT	
Test setup	ANSI C63.4
Test facility	Shielded chamber
Frequency range	150 kHz – 30 MHz
IF bandwidth	9 kHz
EMC class	B
EUT operating condition	#1
Testing dates	2017-01-24


LIMITS		
Band of operations	Quasi-Peak (dB μ V)	Average Limit (dB μ V)
0.15 ÷ 0.5	66 ÷ 56	56 ÷ 46
0.5 ÷ 5	56	46
5 ÷ 30	60	50

TEST RESULT
The EUT meets the requirements of sections 15.207 (a).


TEST PROCEDURE
<ol style="list-style-type: none"> 1) The EUT was placed on a wooden table of size, 80 cm by 80 cm, raised 80 cm in which is located 40 cm away from the vertical wall the shielded room. 2) Each EUT power cord input cord was individually connected through a 50Ω/50μH LISN to the input power source. 3) Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement. 4) The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment is the system) was then performed over the frequency range of 0.15 MHz to 30 MHz. 5) The measurements were made with the detector set to PEAK and AVERAGE amplitude within a bandwidth of 9 kHz during the measurements. 6) The measurements with Quasi-Peak detector are performed only for frequencies for which the Peak values are \geq (Q.P. limit - 6 dB).

MEASUREMENTS RESULT: Conducted disturbance on AC power supply of Personal Computer where the dongle is connected.


Test condition: Lower channel (2402MHz)

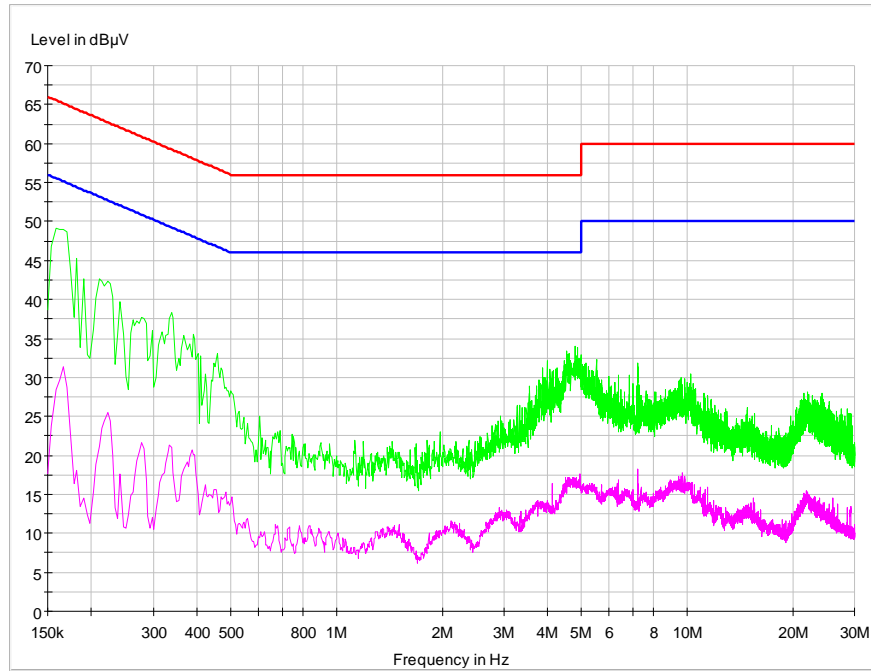

Test condition: Middle channel (2440MHz)

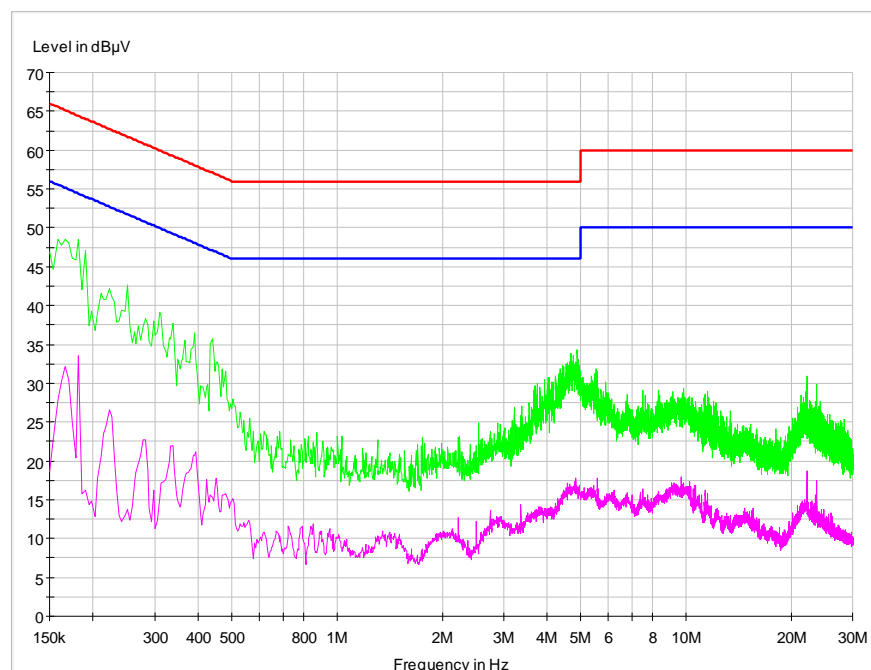

Test condition: Higher channel (2480MHz)

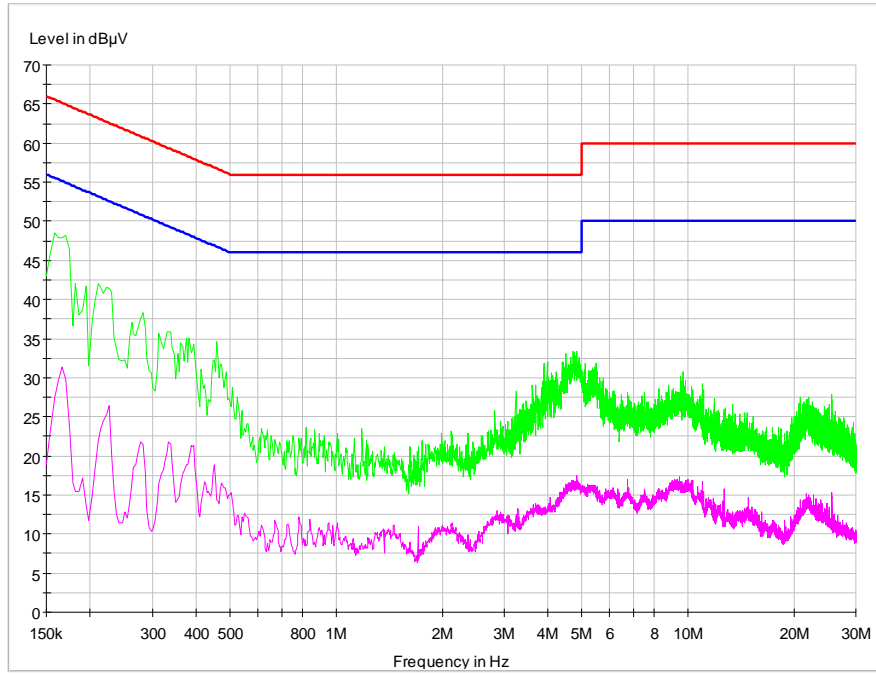

7.3 RADIATED DISTURBANCES

TEST REQUIREMENT	
Test setup	ANSI C63.4
Test facility	Semi-anechoic chamber
Test distance	3 meters
Frequency range	9 kHz to tenth harmonic of fundamental
IF bandwidth (below 30 MHz)	9 kHz
IF bandwidth (below 1.000 MHz)	120 kHz
IF bandwidth (above 1.000 MHz)	1 MHz
EMC class	B
EUT operating condition	#1
Remark: In accordance with part 15.31 (f) (2), where the measurement distance was specified to be 30 or 300 meters, a correction factor was applied in order to permit measurement to be performed at a separation distance. The applied formula for limits at 3 meter is: Extrapolation (dB) = $40\log(300\text{meter} / 3\text{meter}) = +80\text{db}$ Extrapolation (dB) = $40\log(30\text{meter} / 3\text{meter}) = +40\text{db}$	
Testing dates	2017-01-20


LIMITS		
Band of operations	Peak (dB μ V/m)	Average Limit (dB μ V/m)
Restricted bands (§ 15.205)	74	54
Other bands	According to 15.209 or fundamental -20dB (which is greater)	

TEST RESULT
<p>The EUT has been tested in 3 orthogonal axes at the frequencies lowest, middle and highest. The results reported are worst case.</p> <p>The measurement of spurious emission of EUT in receiver mode is deemed to be fulfilled as no limits are exceeded in transmitter mode (condition considered more burdensome).</p> <p>The EUT meets the requirements of sections 15.205 (b), 15.209 and 15.247.</p>


TEST PROCEDURE
<ol style="list-style-type: none"> 1) The EUT was placed on turntable which is 0.8 m above the ground plane 2) The turntable shall rotate from 0° to 360° degrees to determine the position of maximum emission level. 3) The EUT is positioned 3 m away from the receiving antenna which varied from 1 to 4 m to find the highest emission. 4) The measurements were made with the detector set to PEAK and AVERAGE amplitude within a bandwidth of 100 kHz below 1000 MHz and 1 MHz above 1000 MHz. 5) The receiving antenna was positioned in both horizontal and vertical polarization. 6) The measurements with Quasi-Peak detector, below 1000 MHz are performed only for frequencies for which the Peak values are \geq (Q.P. limit - 6 dB).

MEASUREMENTS RESULTS - RADIATED
LOWER CHANNEL 2402MHZ


9 kHz÷30 MHz

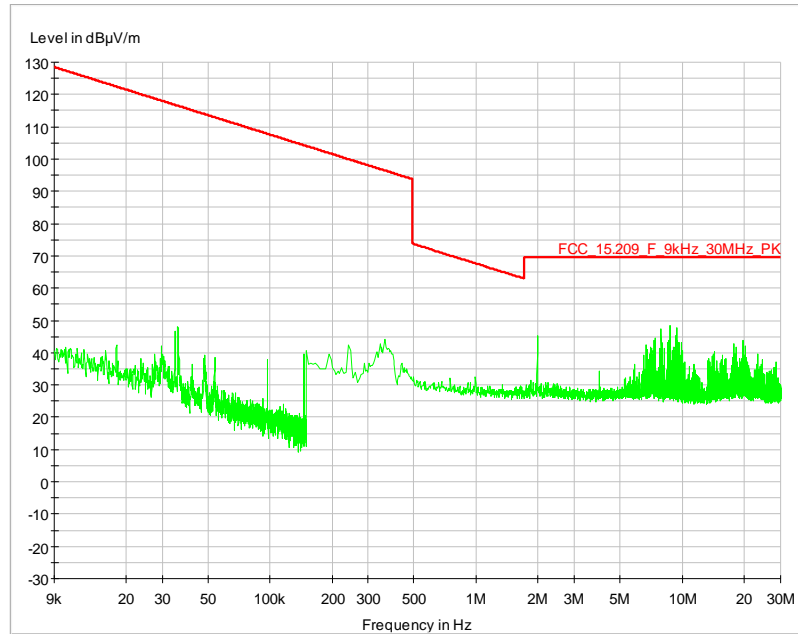


30÷1.000 MHz

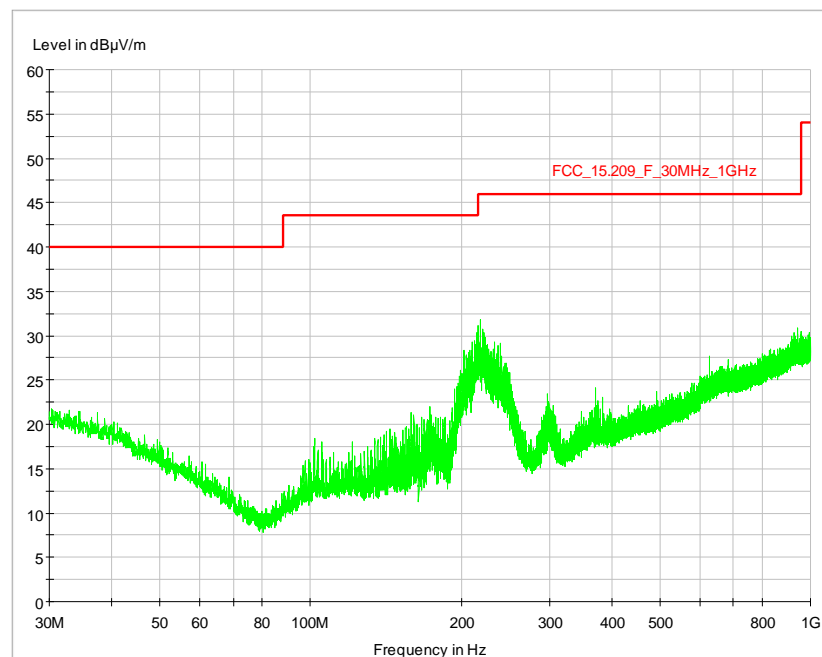


1 GHz÷8 GHz

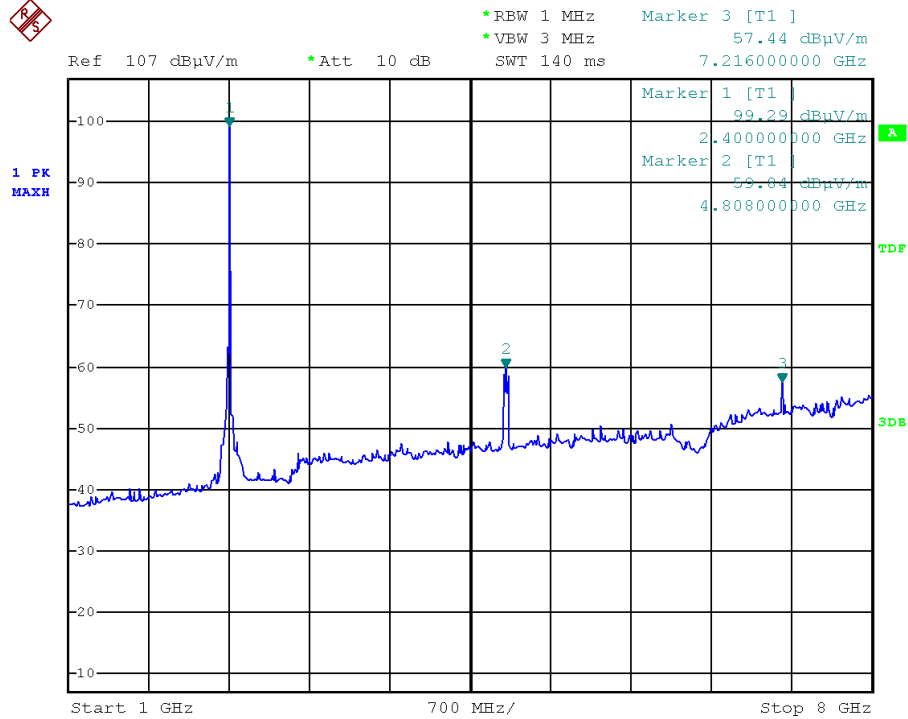


8 GHz÷13 GHz

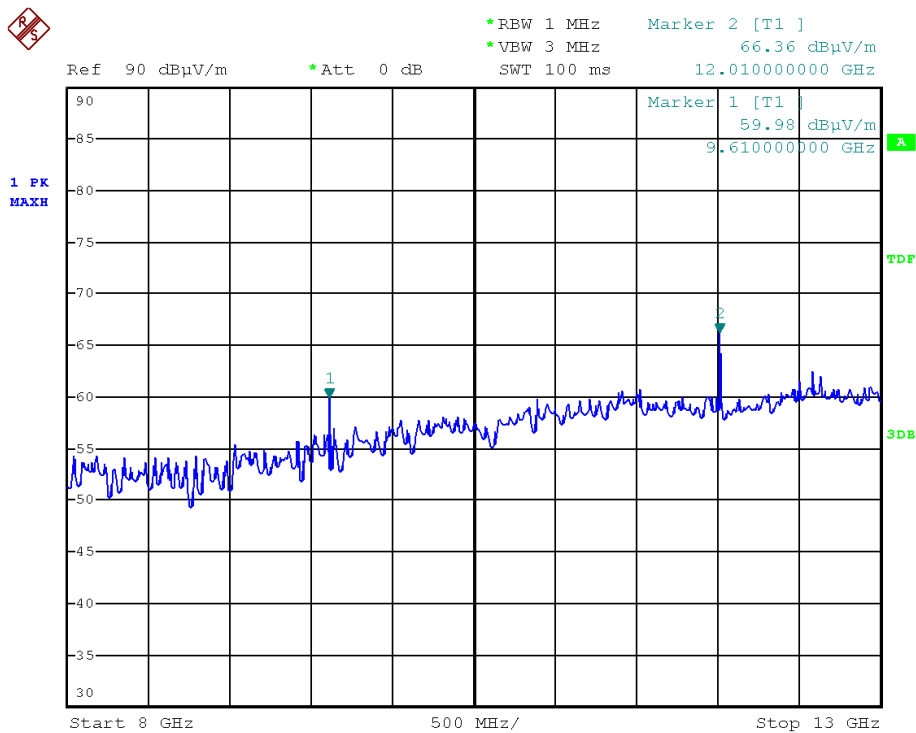



13 GHz÷17 GHz

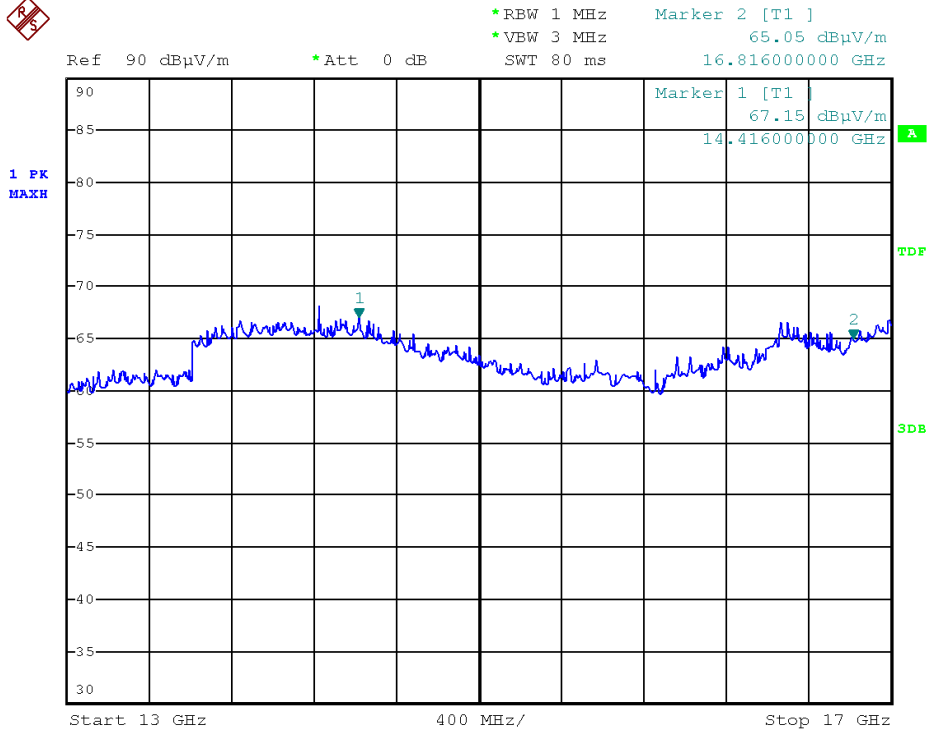

17 GHz÷25 GHz

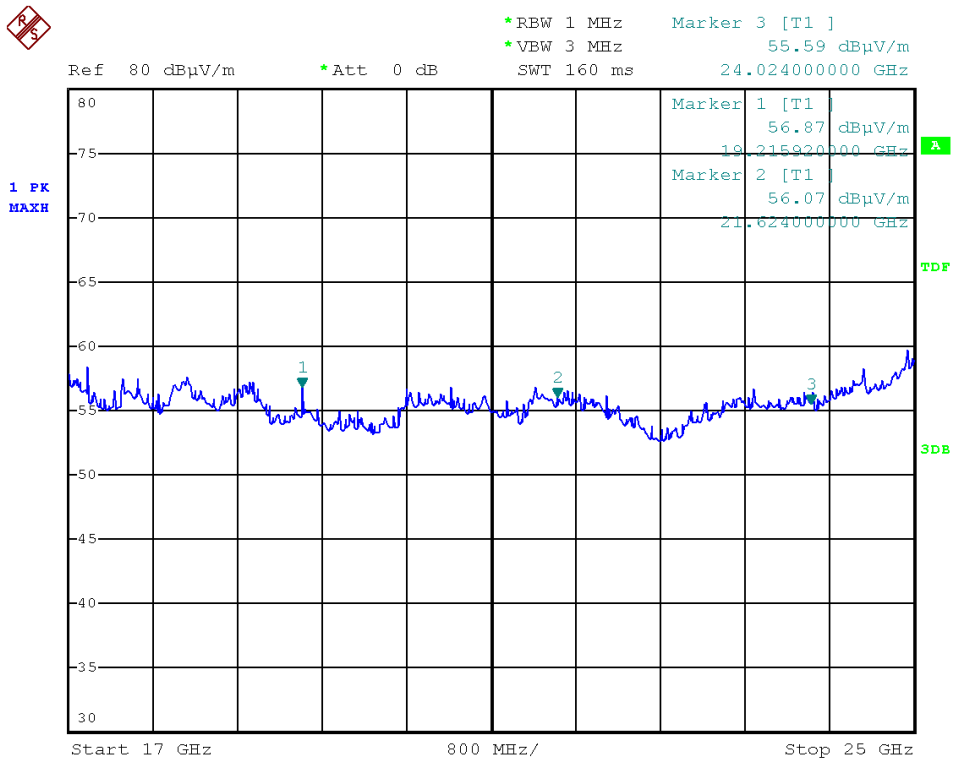

Fundamental 2402MHz

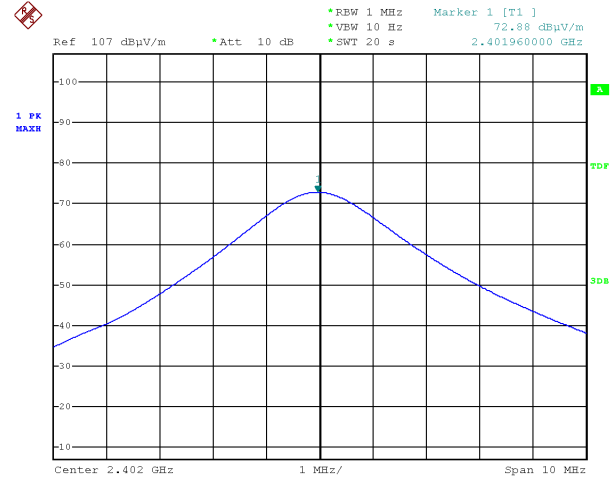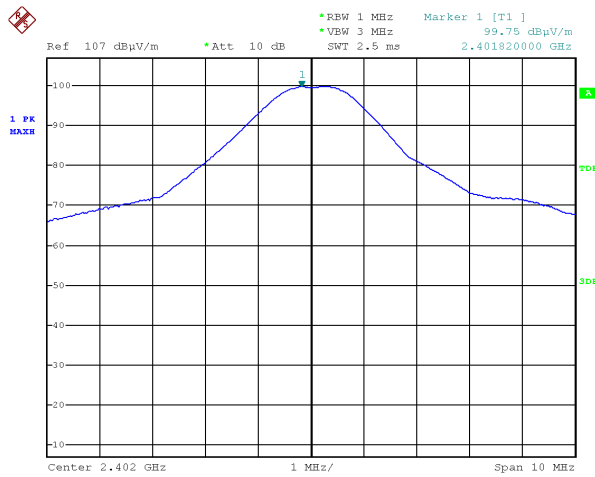


PEAK RESULT (RBW=1MHz; VBW=3MHz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	PK Limit (AV + 20dB)	PK Limit (AV + 20dB)	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
2402 (fundamental)	105.51	27.70	4.14	-37.60	99.75	-----	-----	-----

AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	AV Limit	AV Limit	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
2402 (fundamental)	78.64	27.70	4.14	-37.60	72.88	-----	-----	-----

2° Harmonic 4804MHz

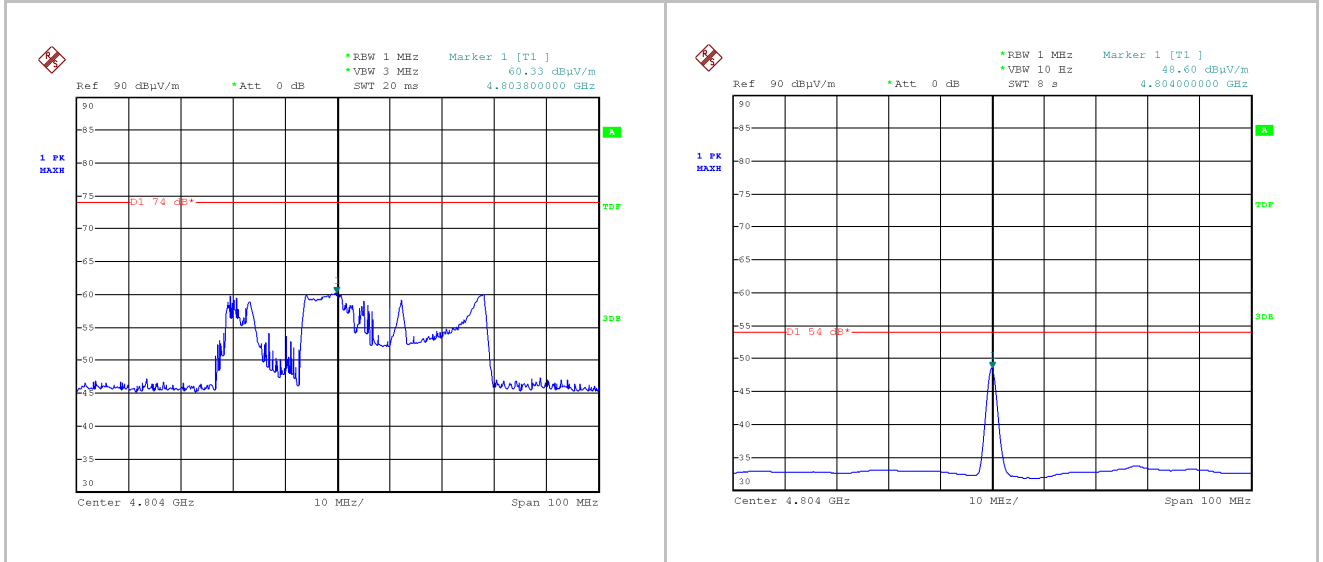



PEAK RESULT (RBW=1MHz; VBW=3MHz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	PK Limit (AV + 20dB)	PK Limit (AV + 20dB)	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
4804	60.75	31.30	5.47	-37.19	60.33	5000	74.00	>13

AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	AV Limit	AV Limit	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
4804	49.02	31.30	5.47	-37.19	48.60	500	54.00	>5

3° Harmonic 7206MHz

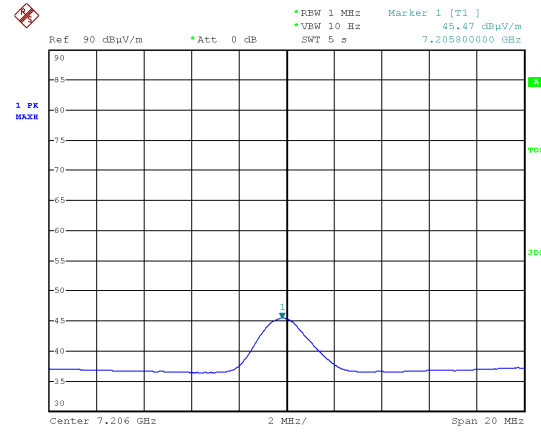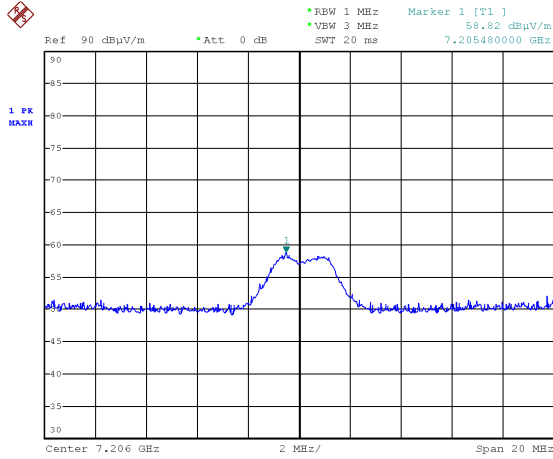



PEAK RESULT (RBW=1MHz; VBW=3MHz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	PK Limit (AV + 20dB)	PK Limit (AV + 20dB)	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
7206	53.94	36.00	6.51	-37.63	58.82	5000	74.00	>15

AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	AV Limit	AV Limit	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
7206	40.59	36.00	6.51	-37.63	45.47	500	54.00	>8

4° Harmonic 9608MHz

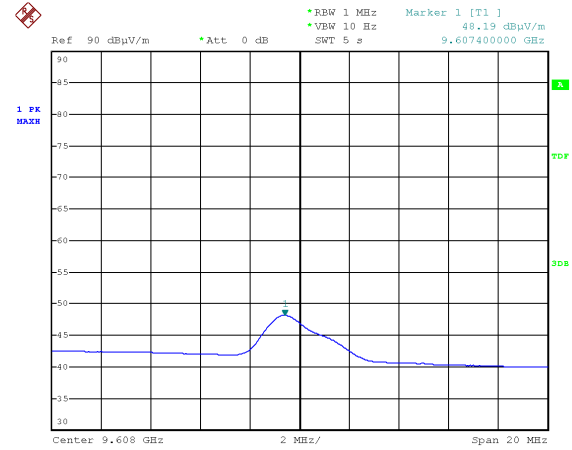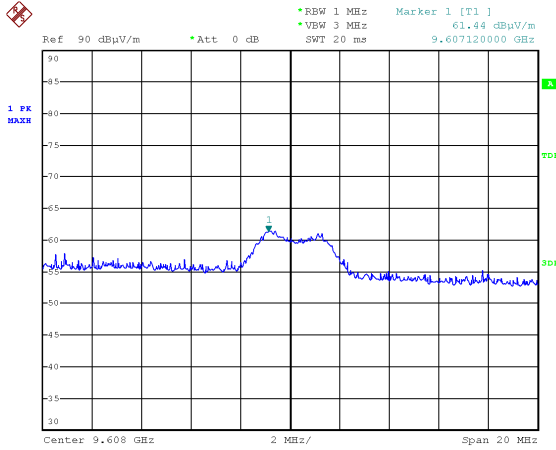



PEAK RESULT (RBW=1MHz; VBW=3MHz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	PK Limit (AV + 20dB)	PK Limit (AV + 20dB)	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
9608	53.04	37.70	8.70	-38.00	61.44	5000	74.00	>12

AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	AV Limit	AV Limit	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
9608	39.79	37.70	8.70	-38.00	48.19	500	54.00	>5

5° Harmonic 12010MHz

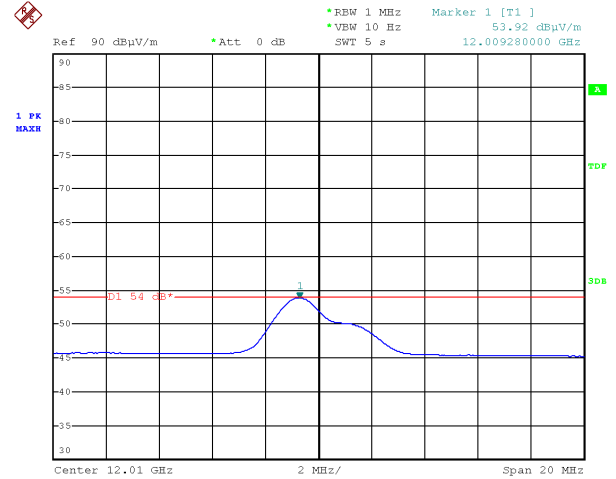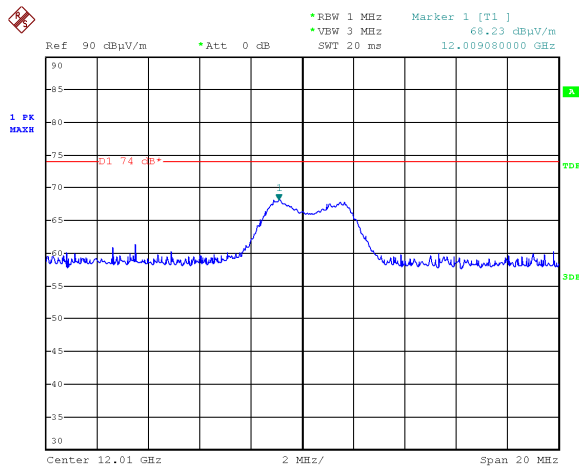



PEAK RESULT (RBW=1MHz; VBW=3MHz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	PK Limit (AV + 20dB)	PK Limit (AV + 20dB)	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
12010	56.64	39.10	10.04	-37.55	68.23	5000	74.00	>5

AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	AV Limit	AV Limit	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
12010	42.33	39.10	10.04	-37.55	53.92	500	54.00	0.08

6° Harmonic 14412MHz

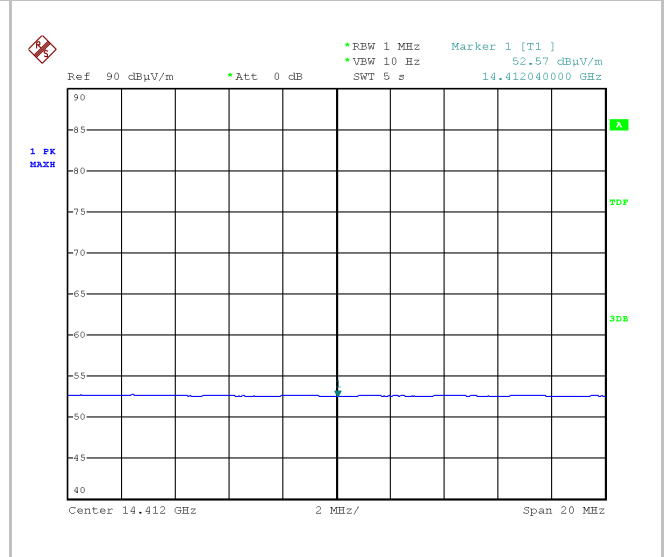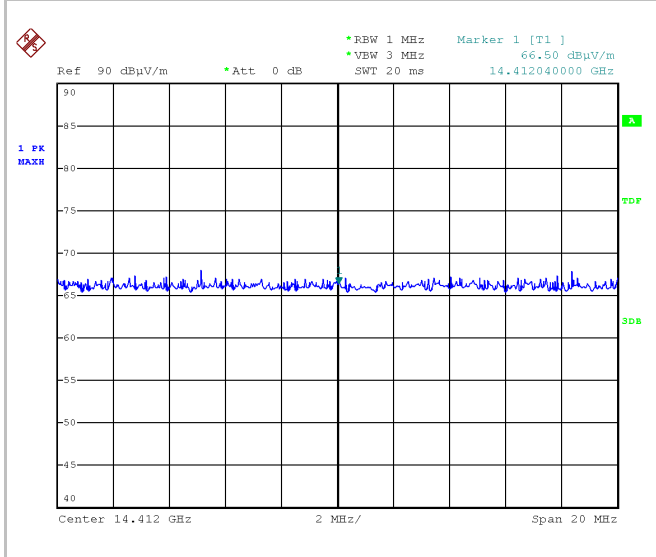


PEAK RESULT (RBW=1MHz; VBW=3MHz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	PK Limit (AV + 20dB)	PK Limit (AV + 20dB)	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
14412	49.84	41.80	10.86	-36.00	66.50	5000	74.00	>7

AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	AV Limit	AV Limit	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
14412	35.91	41.80	10.86	-36.00	52.57	500	54.00	1.43

7° Harmonic 16814MHz

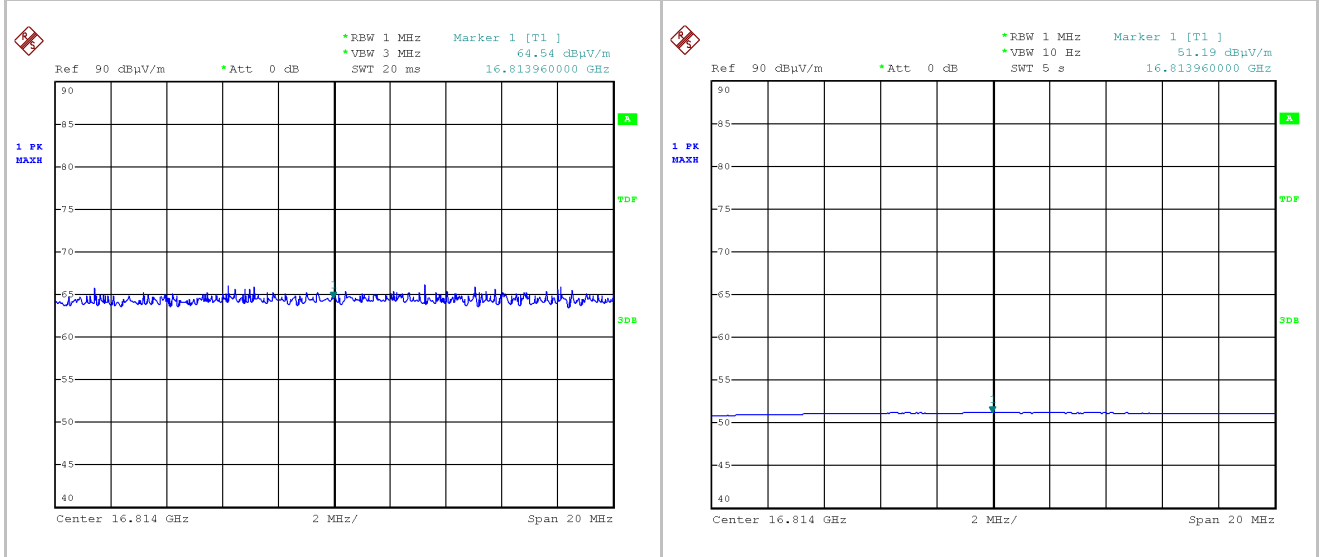


PEAK RESULT (RBW=1MHz; VBW=3MHz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	PK Limit (AV + 20dB)	PK Limit (AV + 20dB)	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
16814	48.80	40.00	11.63	-35.89	64.54	5000	74.00	>9

AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	AV Limit	AV Limit	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
16814	35.45	40.00	11.63	-35.89	51.19	500	54.00	2.81

8° Harmonic 19216MHz

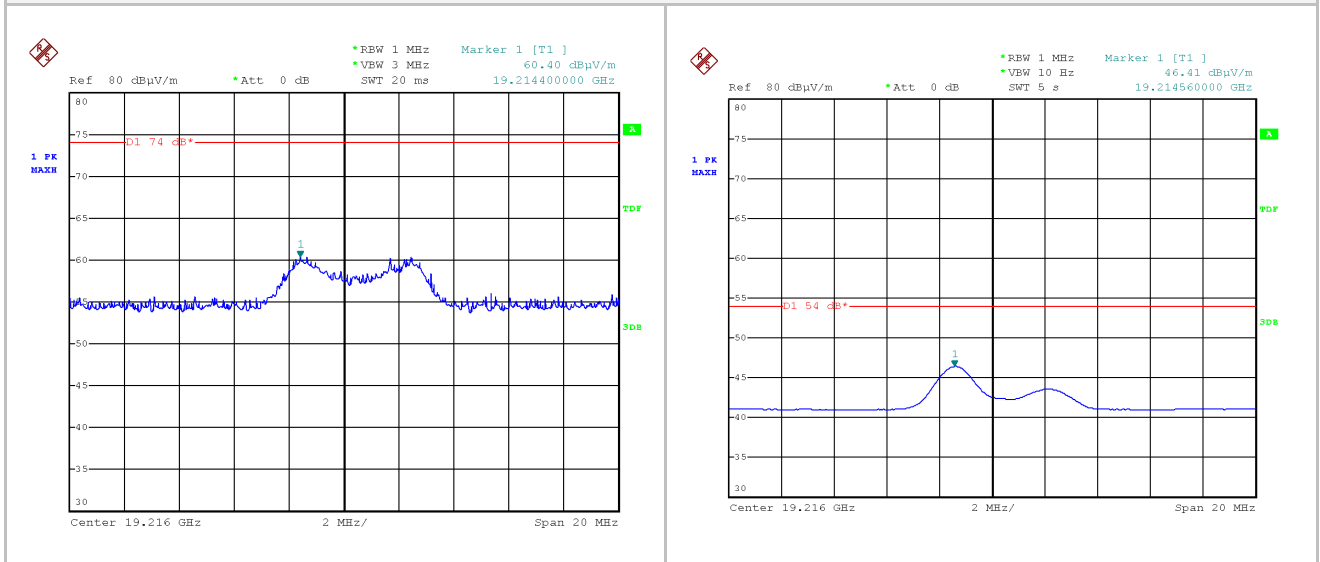


PEAK RESULT (RBW=1MHz; VBW=3MHz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	PK Limit (AV + 20dB)	PK Limit (AV + 20dB)	Margin
(MHz)	(dBµV)	(dB1/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
19216	50.34	38.00	4.80	-32.70	60.44	5000	74.00	>13

AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	AV Limit	AV Limit	Margin
(MHz)	(dBµV)	(dB1/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
19216	36.31	38.00	4.80	-32.70	46.41	500	54.00	>7

9° Harmonic 21618MHz

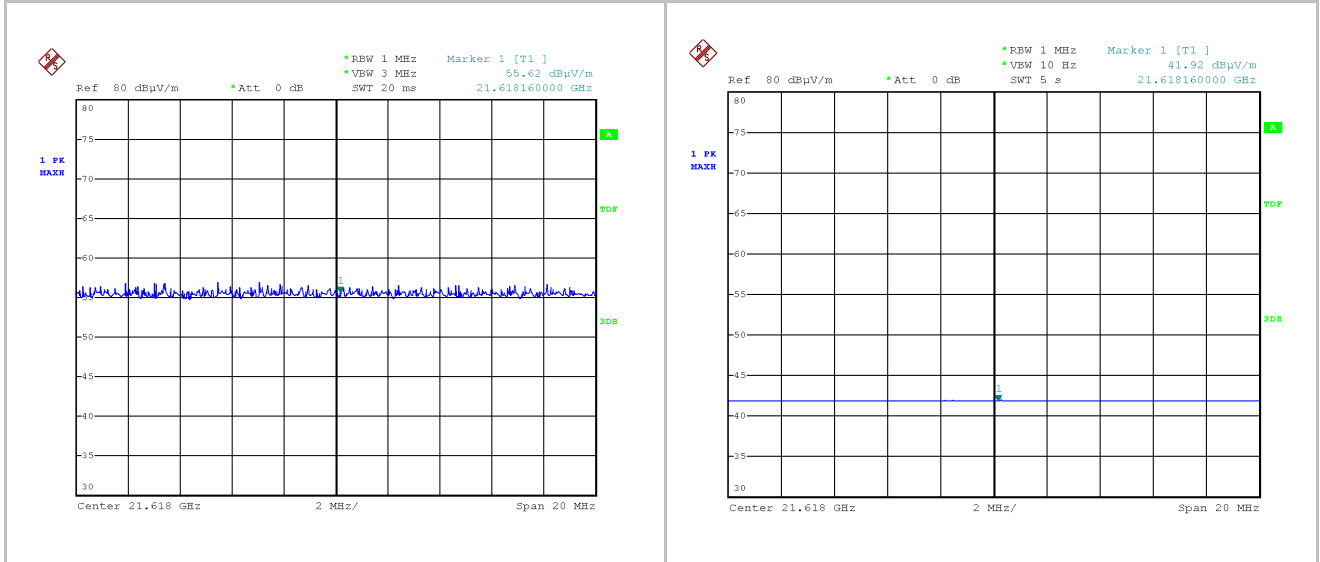


PEAK RESULT (RBW=1MHz; VBW=3MHz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	PK Limit (AV + 20dB)	PK Limit (AV + 20dB)	Margin
(MHz)	(dBµV)	(dB1/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
21618	45.61	38.21	5.30	-33.50	55.62	5000	74.00	>18

AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	AV Limit	AV Limit	Margin
(MHz)	(dBµV)	(dB1/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
21618	31.91	38.21	5.30	-33.50	41.92	500	54.00	>12

10° Harmonic 24020MHz

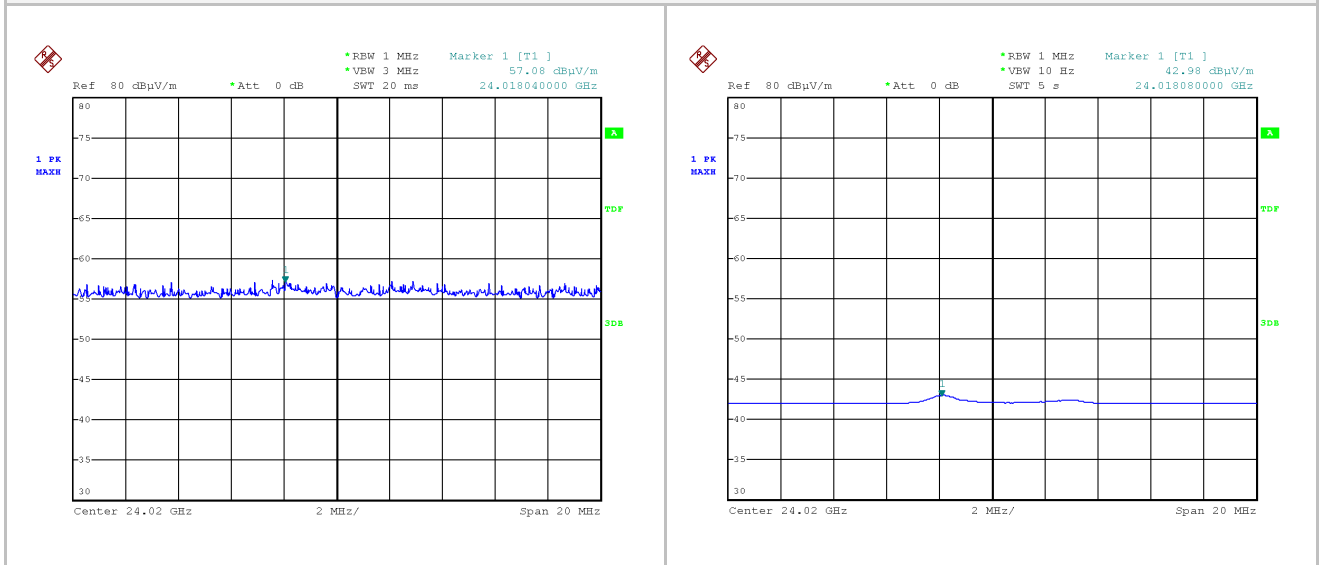

PEAK RESULT (RBW=1MHz; VBW=3MHz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	PK Limit (AV + 20dB)	PK Limit (AV + 20dB)	Margin
(MHz)	(dBµV)	(dB1/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
24020	45.13	39.05	5.60	-32.70	57.08	5000	74.00	>16


AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	AV Limit	AV Limit	Margin
(MHz)	(dBµV)	(dB1/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
24020	31.03	39.05	5.60	-32.70	42.98	500	54.00	>11


NOTE: All the previous measures are the worst case on 3 axes X Y and Z and both polarization.

(MIDDLE CHANNEL 2440MHZ)


9 kHz ÷ 30 MHz

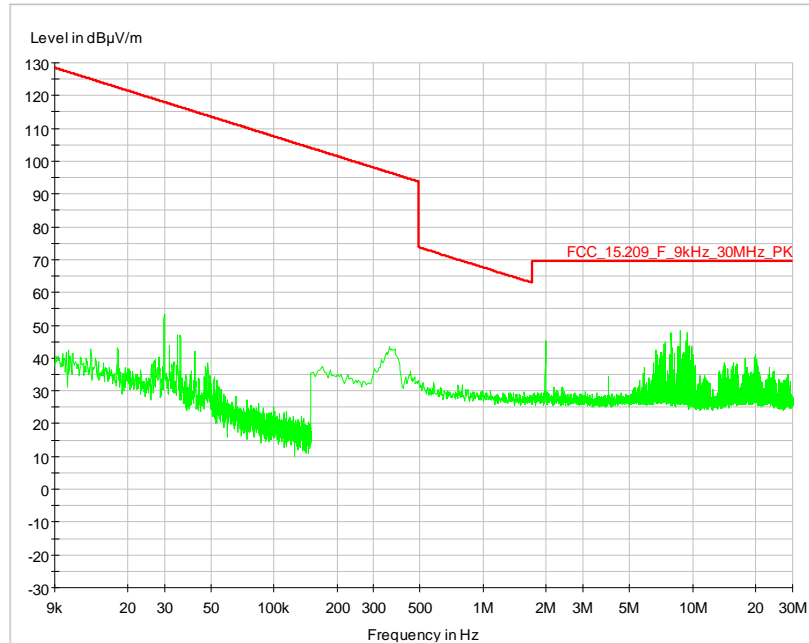


30 ÷ 1.000 MHz

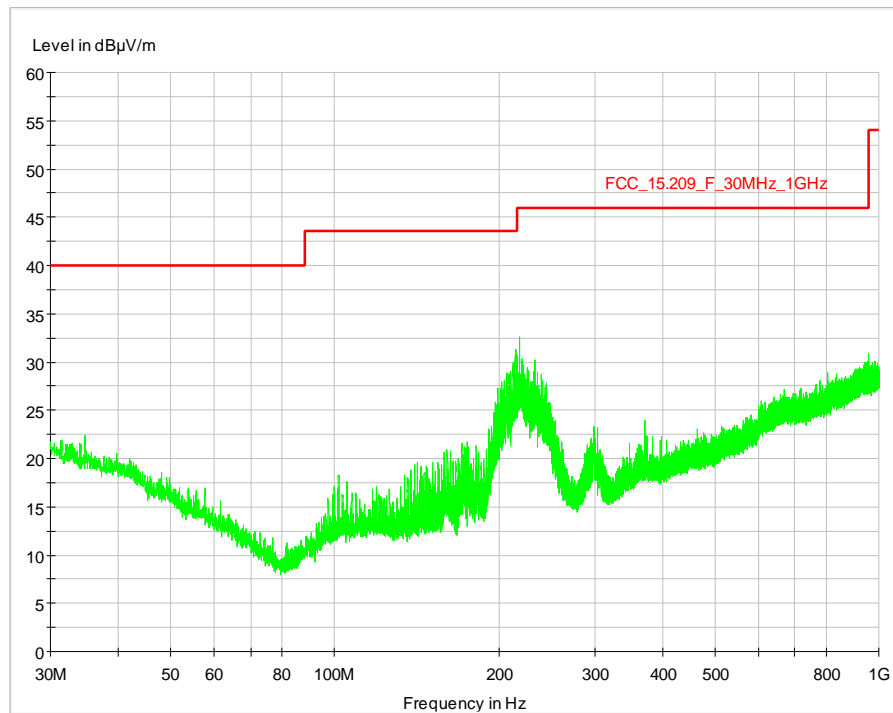


1 GHz÷8 GHz

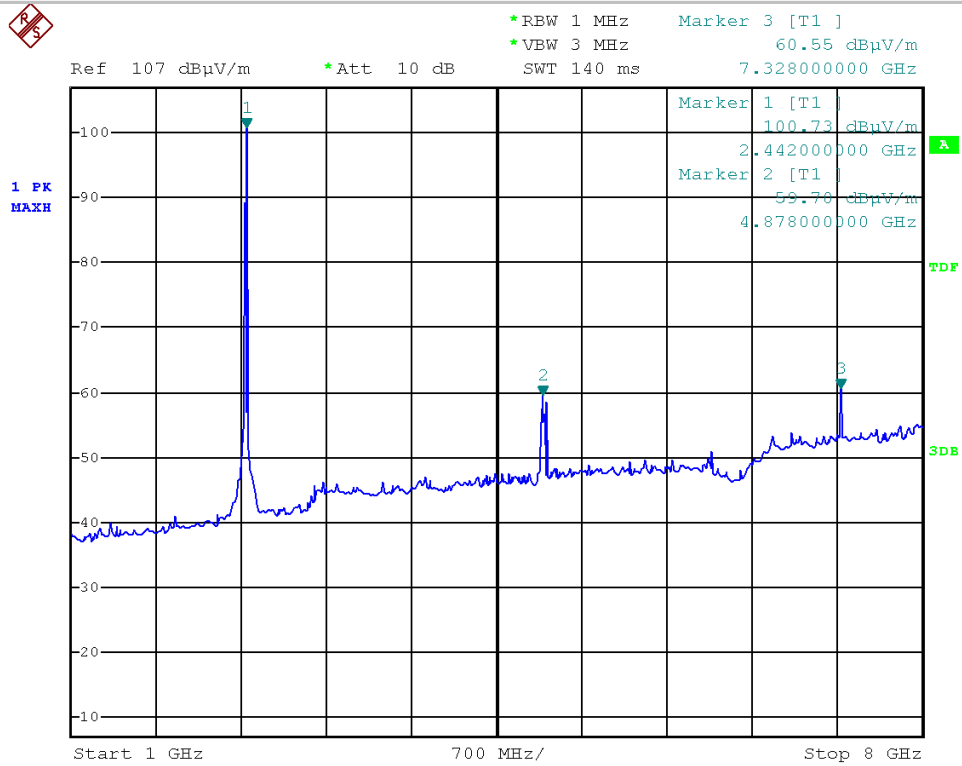


8 GHz÷13 GHz

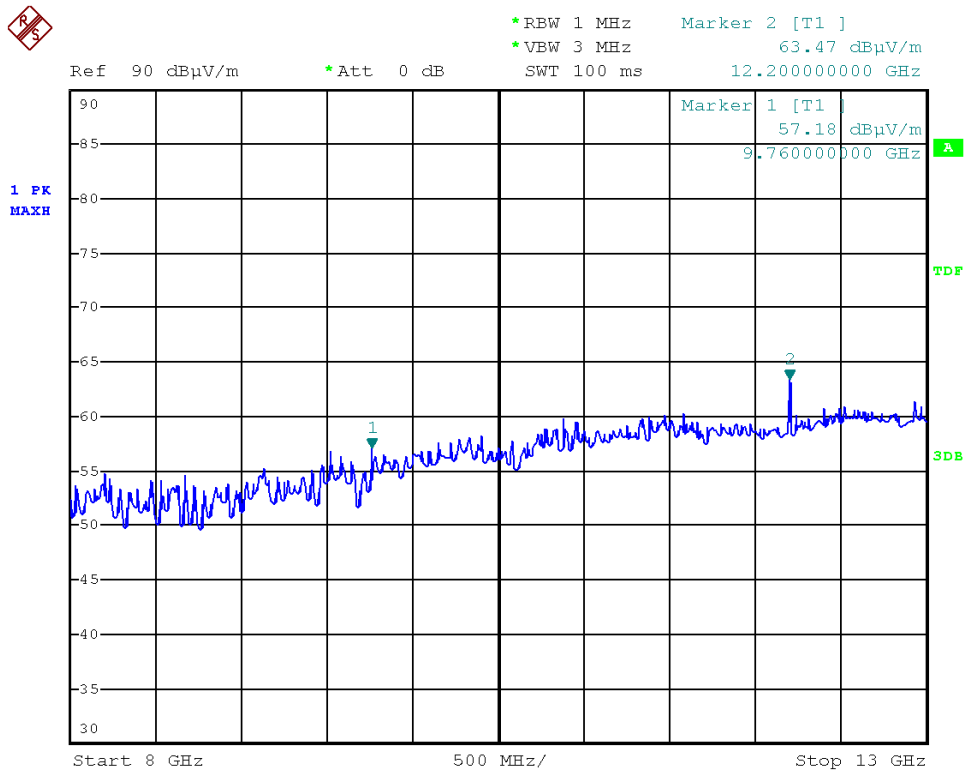



13 GHz÷17 GHz

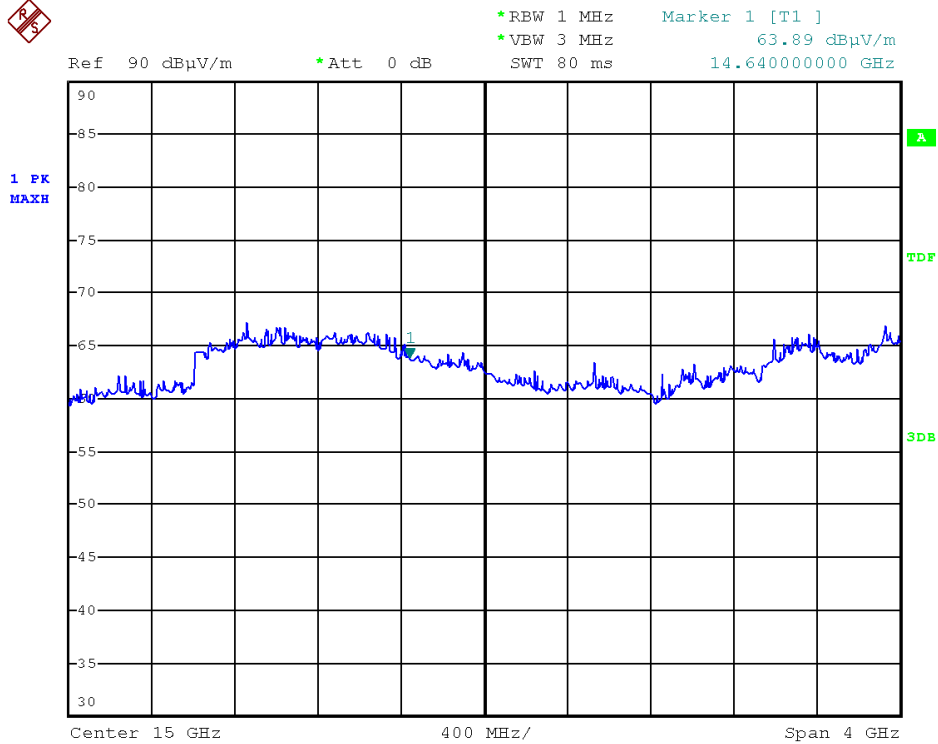

17 GHz÷25 GHz

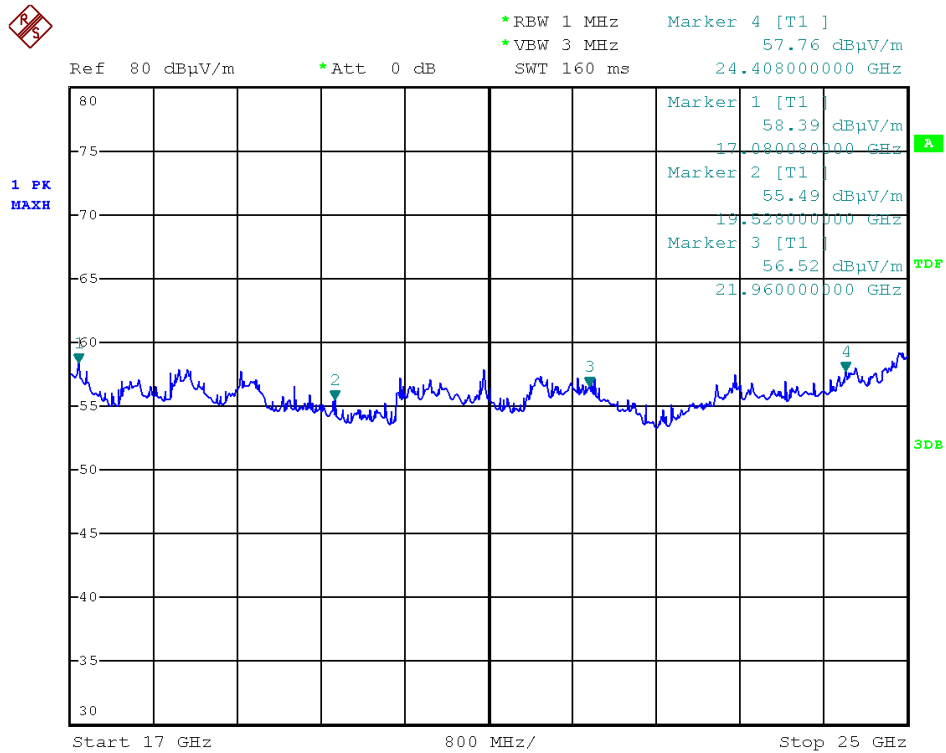

Fundamental 2440MHz

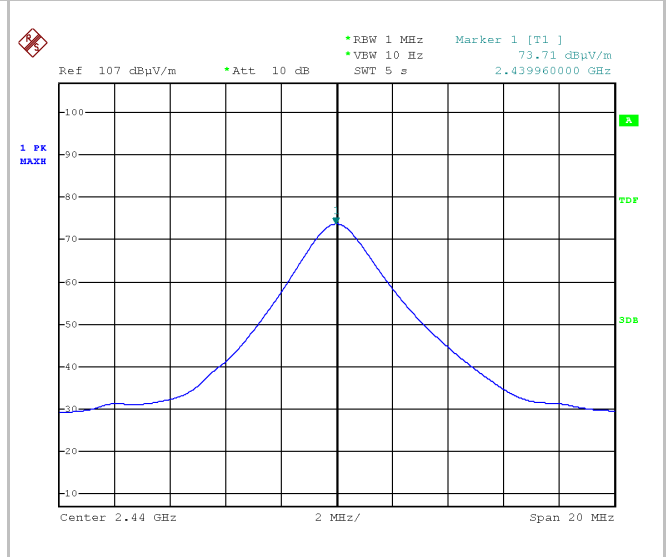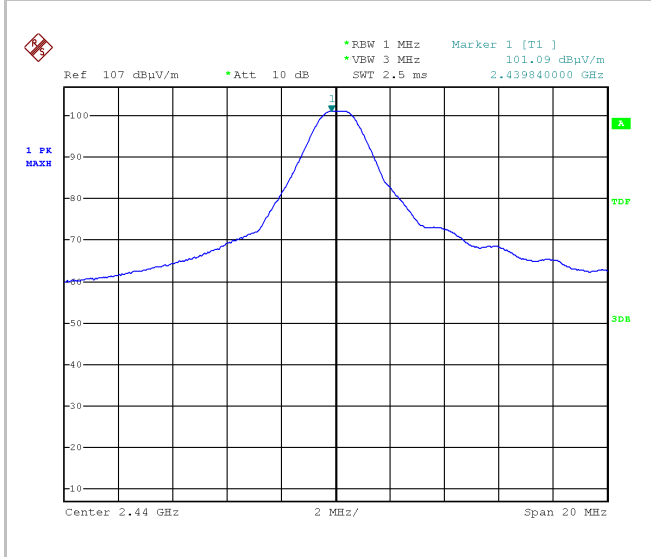


PEAK RESULT (RBW=1MHz; VBW=3MHz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	PK Limit (AV + 20dB)	PK Limit (AV + 20dB)	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
2440 (fundamental)	107.37	27.70	3.62	-37.60	101.09	-----	-----	-----

AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	AV Limit	AV Limit	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
2440 (fundamental)	79.99	27.70	3.62	-37.60	73.71	-----	-----	-----

2° Harmonic 4880MHz

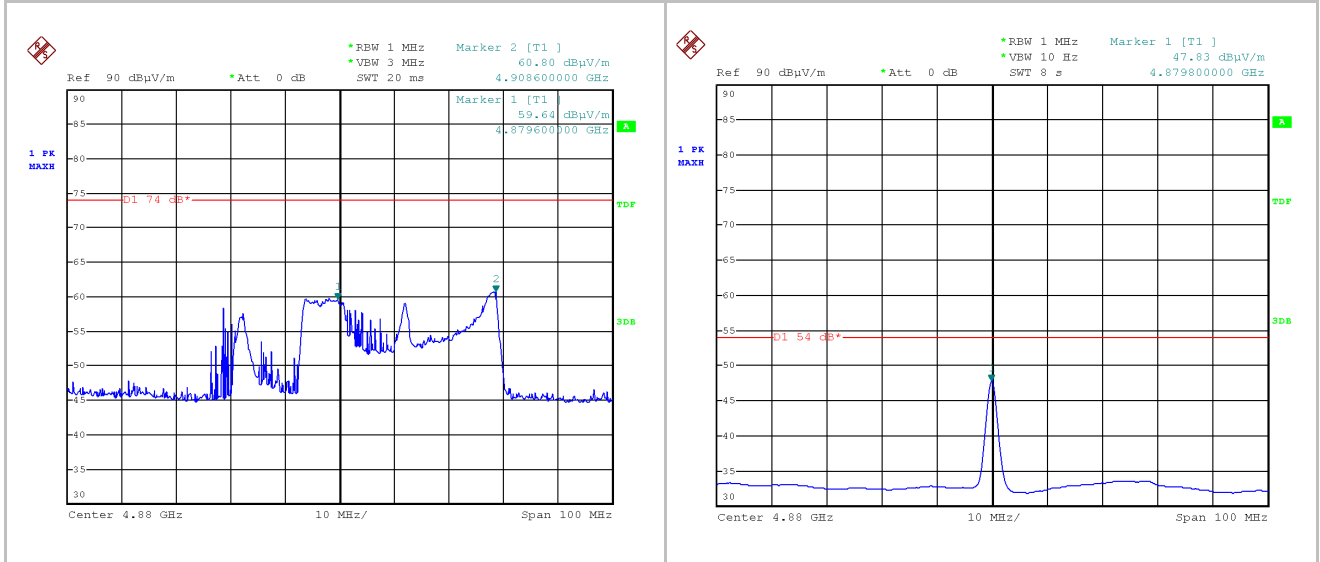



PEAK RESULT (RBW=1MHz; VBW=3MHz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	PK Limit (AV + 20dB)	PK Limit (AV + 20dB)	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
4880	58.94	31.30	6.22	-36.82	59.64	5000	74.00	>13
4908	60.18	31.30	6.22	-36.82	60.88	5000	74.00	>13

AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	AV Limit	AV Limit	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
4880	43.13	31.30	6.22	-36.82	47.83	500	54.00	>5

3° Harmonic 7320MHz

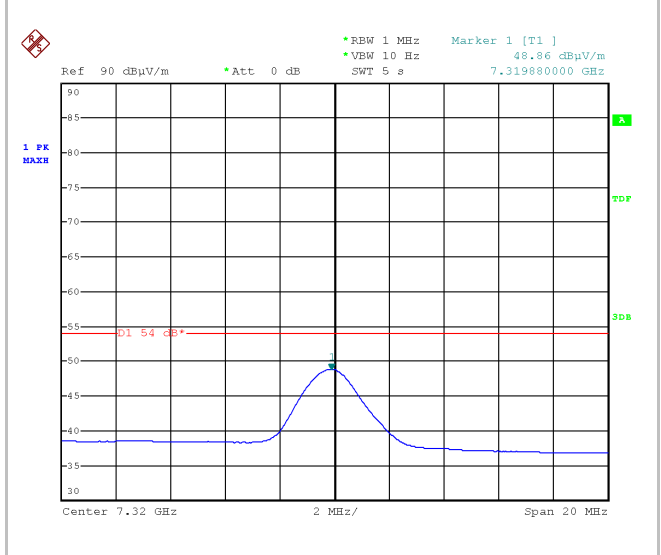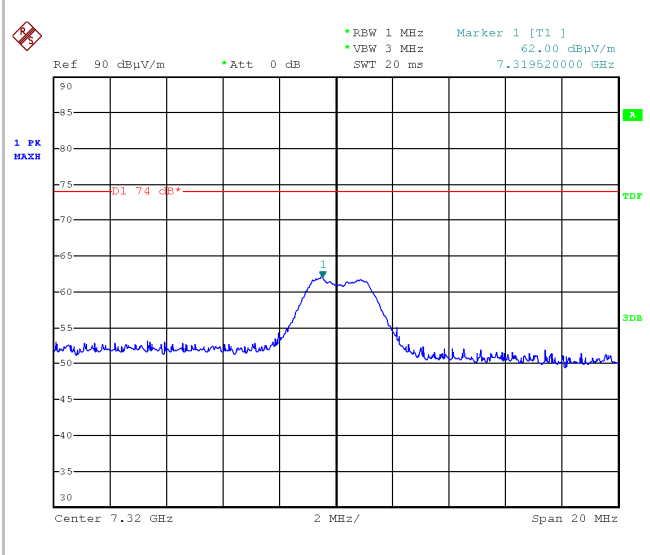


PEAK RESULT (RBW=1MHz; VBW=3MHz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	PK Limit (AV + 20dB)	PK Limit (AV + 20dB)	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
7320	56.77	36.50	6.36	-37.63	62.00	5000	74.00	12

AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	AV Limit	AV Limit	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
7320	43.63	36.50	6.36	-37.63	48.86	500	54.00	>5

4° Harmonic 9760MHz

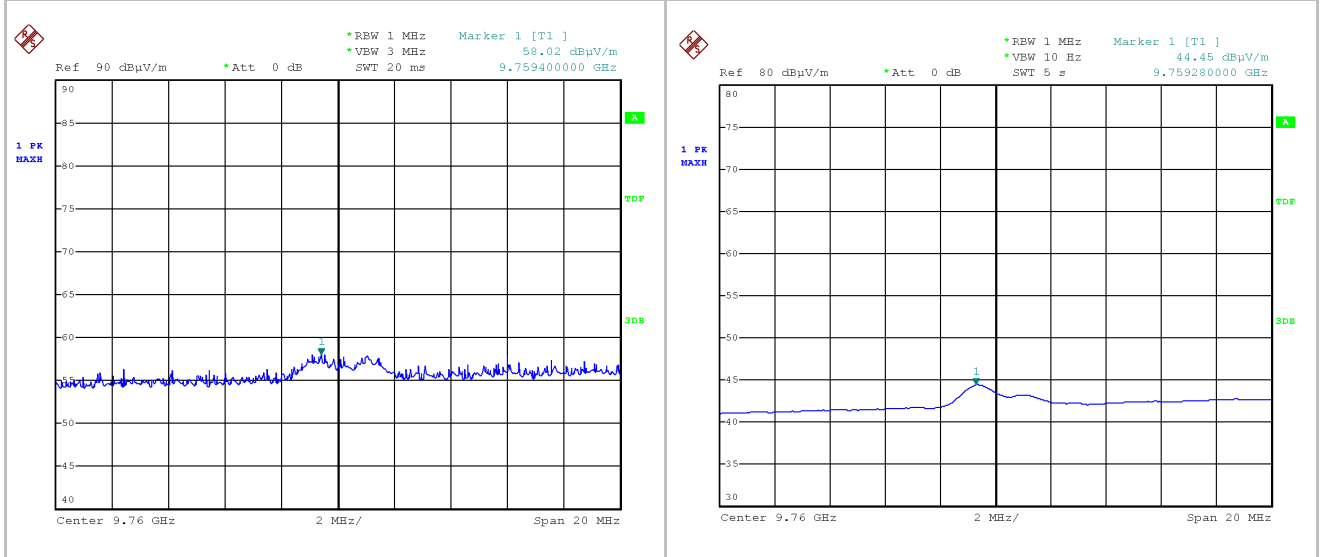



PEAK RESULT (RBW=1MHz; VBW=3MHz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	PK Limit (AV + 20dB)	PK Limit (AV + 20dB)	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
9760	49.27	37.70	9.00	-37.95	58.02	5000	74.00	>15

AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	AV Limit	AV Limit	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
9760	35.70	37.70	9.00	-37.95	44.45	500	54.00	>9

5° Harmonic 12200MHz

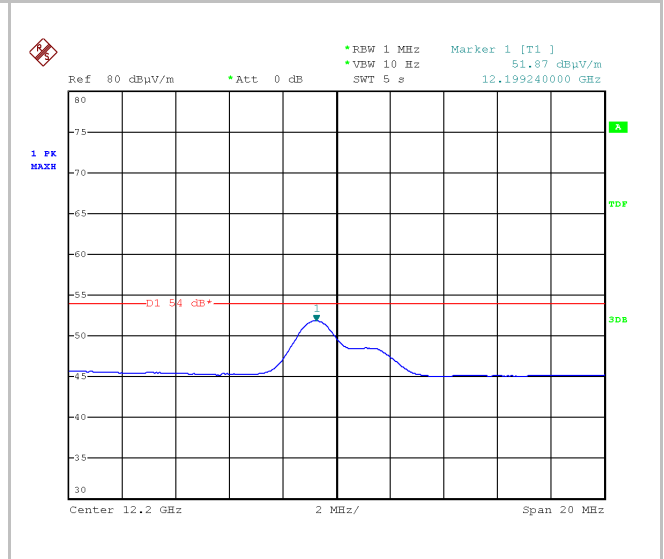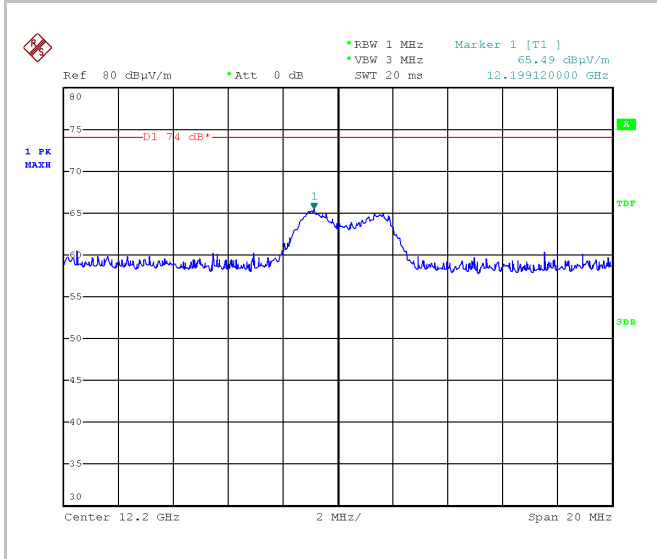


PEAK RESULT (RBW=1MHz; VBW=3MHz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	PK Limit (AV + 20dB)	PK Limit (AV + 20dB)	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
12200	54.46	39.10	9.48	-37.55	65.49	5000	74.00	>8

AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	AV Limit	AV Limit	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
12200	40.84	39.10	9.48	-37.55	51.87	500	54.00	>2

6° Harmonic 14640MHz

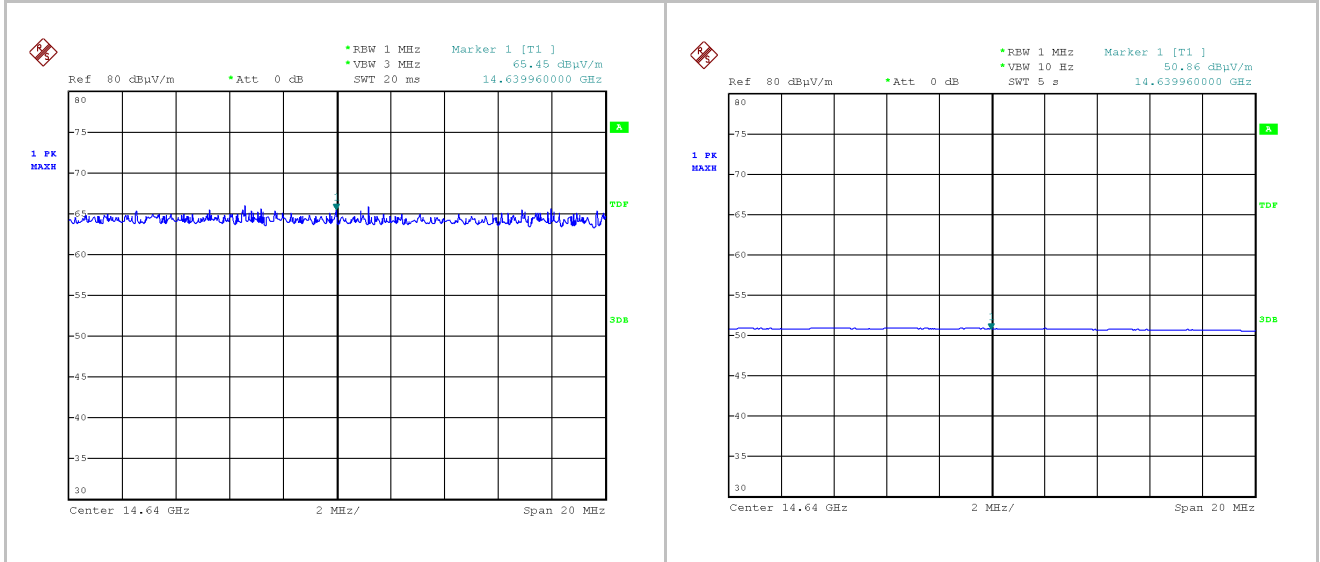


PEAK RESULT (RBW=1MHz; VBW=3MHz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	PK Limit (AV + 20dB)	PK Limit (AV + 20dB)	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
14640	49.00	41.80	10.65	-36.00	65.45	5000	74.00	>8

AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	AV Limit	AV Limit	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
14640	34.41	41.80	10.65	-36.00	50.86	500	54.00	>3

7° Harmonic 17080MHz

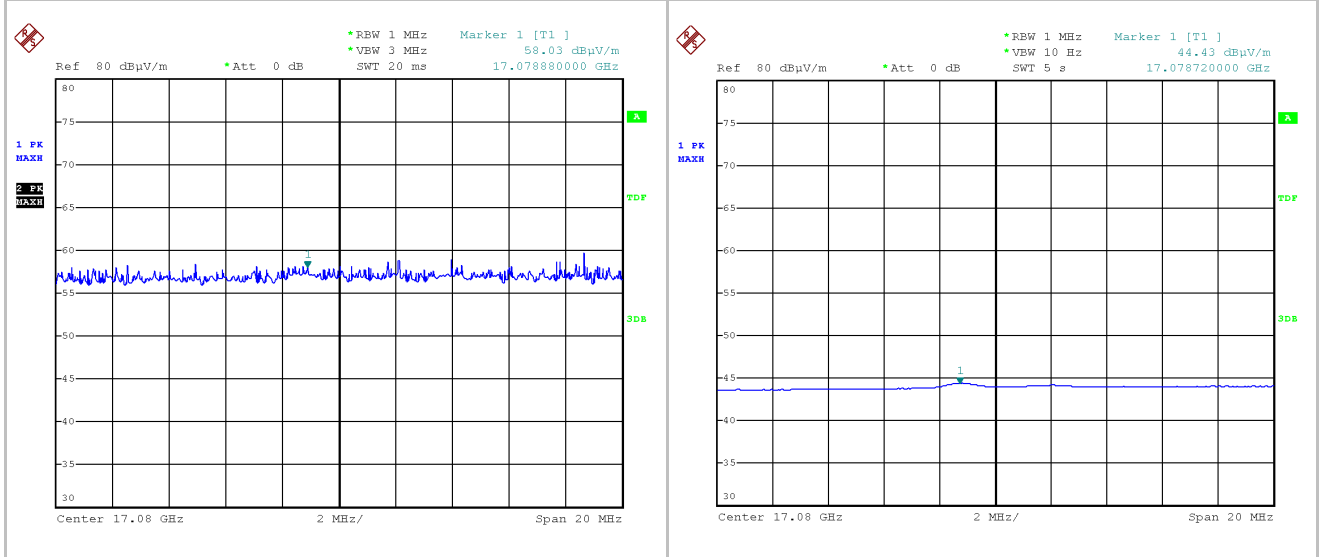



PEAK RESULT (RBW=1MHz; VBW=3MHz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	PK Limit (AV + 20dB)	PK Limit (AV + 20dB)	Margin
(MHz)	(dBµV)	(dB1/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
17080	45.32	37.92	4.80	-30.01	58.03	5000	74.00	>15

AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	AV Limit	AV Limit	Margin
(MHz)	(dBµV)	(dB1/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
17080	31.72	37.92	4.80	-30.01	44.43	500	54.00	>9

8° Harmonic 19520MHz

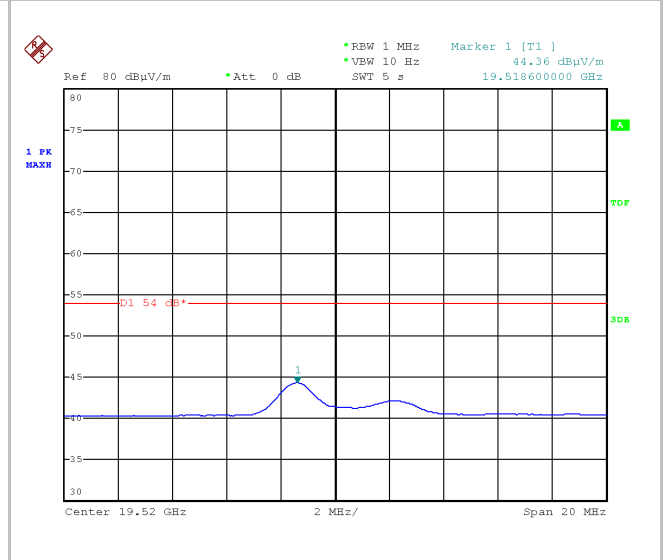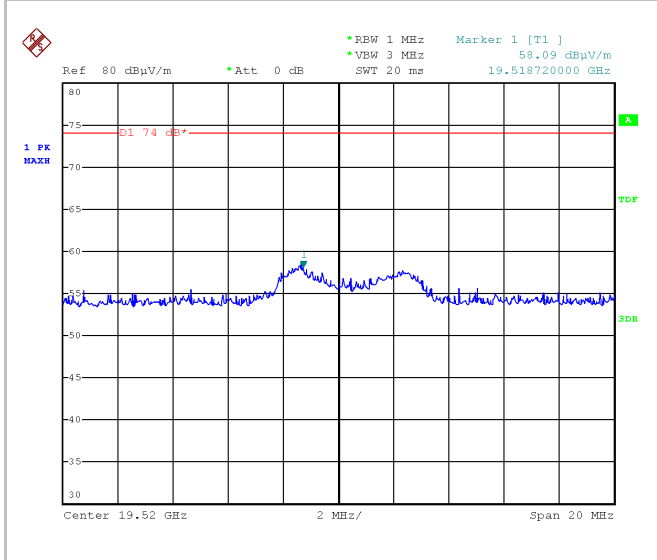


PEAK RESULT (RBW=1MHz; VBW=3MHz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	PK Limit (AV + 20dB)	PK Limit (AV + 20dB)	Margin
(MHz)	(dBµV)	(dB1/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
19520	49.07	37.92	4.80	-33.70	58.09	5000	74.00	>15

AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	AV Limit	AV Limit	Margin
(MHz)	(dBµV)	(dB1/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
19520	35.34	37.92	4.80	-33.70	44.36	500	54.00	>9

9° Harmonic 21960MHz

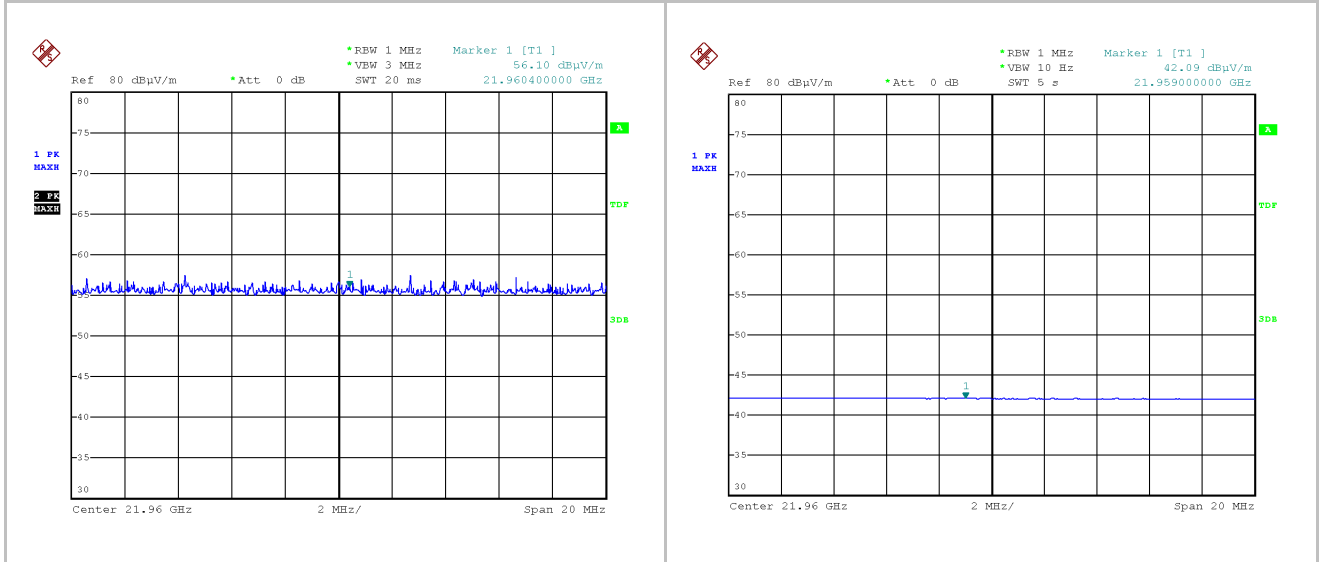



PEAK RESULT (RBW=1MHz; VBW=3MHz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	PK Limit (AV + 20dB)	PK Limit (AV + 20dB)	Margin
(MHz)	(dBµV)	(dB1/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
21960	45.97	38.13	5.30	-33.30	56.10	5000	74.00	>17

AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	AV Limit	AV Limit	Margin
(MHz)	(dBµV)	(dB1/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
21960	31.96	38.13	5.30	-33.30	42.09	500	54.00	>11

10° Harmonic 24400MHz

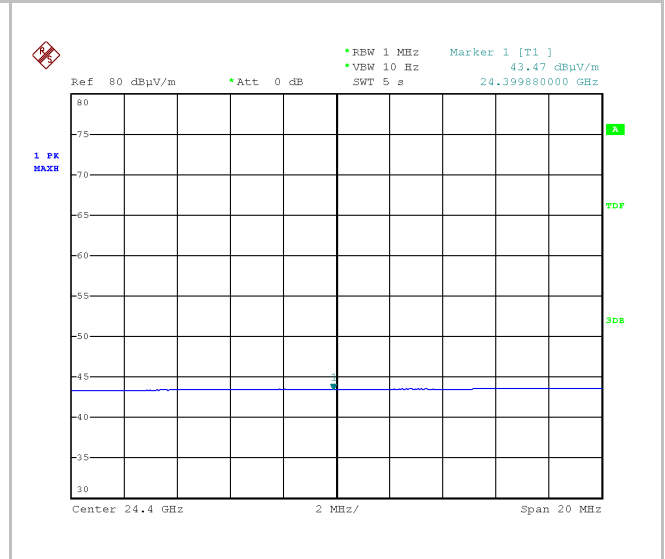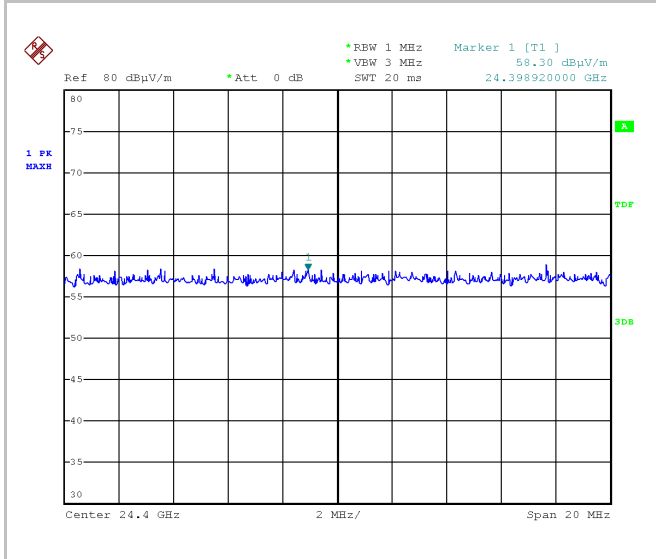

PEAK RESULT (RBW=1MHz; VBW=3MHz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	PK Limit (AV + 20dB)	PK Limit (AV + 20dB)	Margin
(MHz)	(dBµV)	(dB1/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
24400	46.06	39.14	5.60	-32.50	58.30	5000	74.00	>15


AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	AV Limit	AV Limit	Margin
(MHz)	(dBµV)	(dB1/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
24400	31.23	39.14	5.60	-32.50	43.47	500	54.00	>10


NOTE: All the previous measures are the worst case on 3 axes X Y and Z and both polarization.

(HIGHER CHANNEL 2480MHz)


9 kHz ÷ 30 MHz

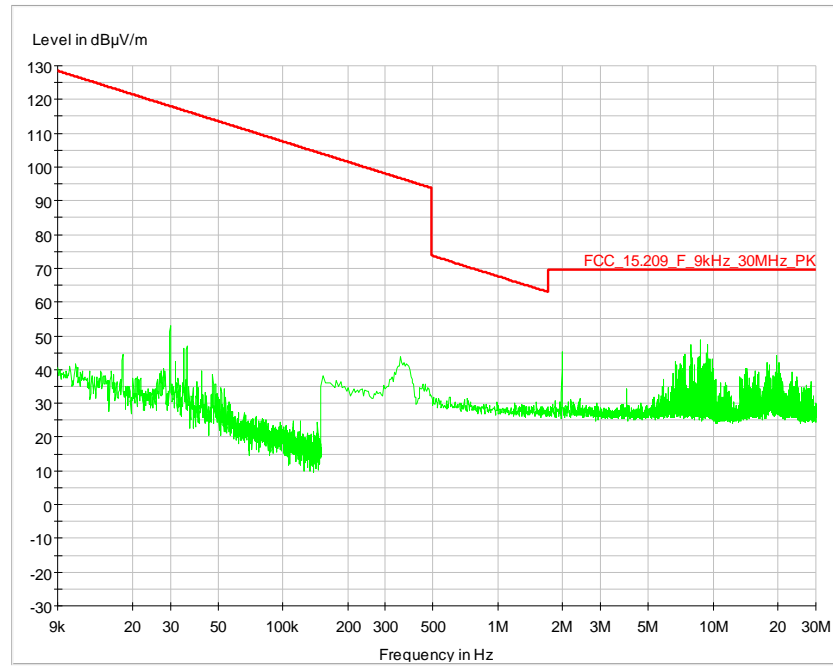


30 ÷ 1.000 MHz

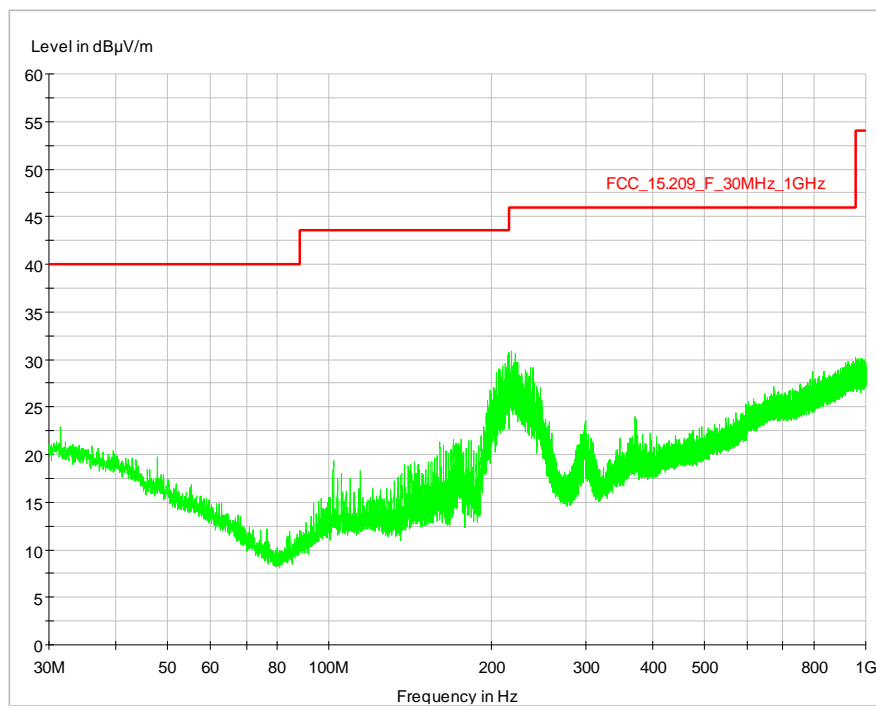


1 GHz÷8 GHz

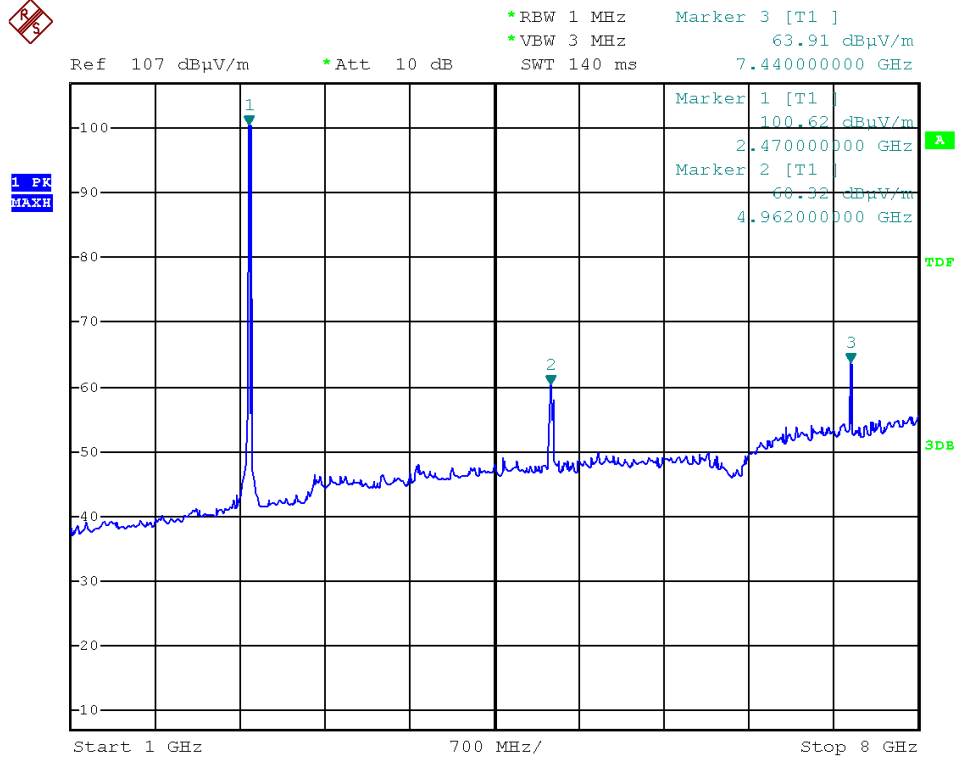


8 GHz÷13 GHz

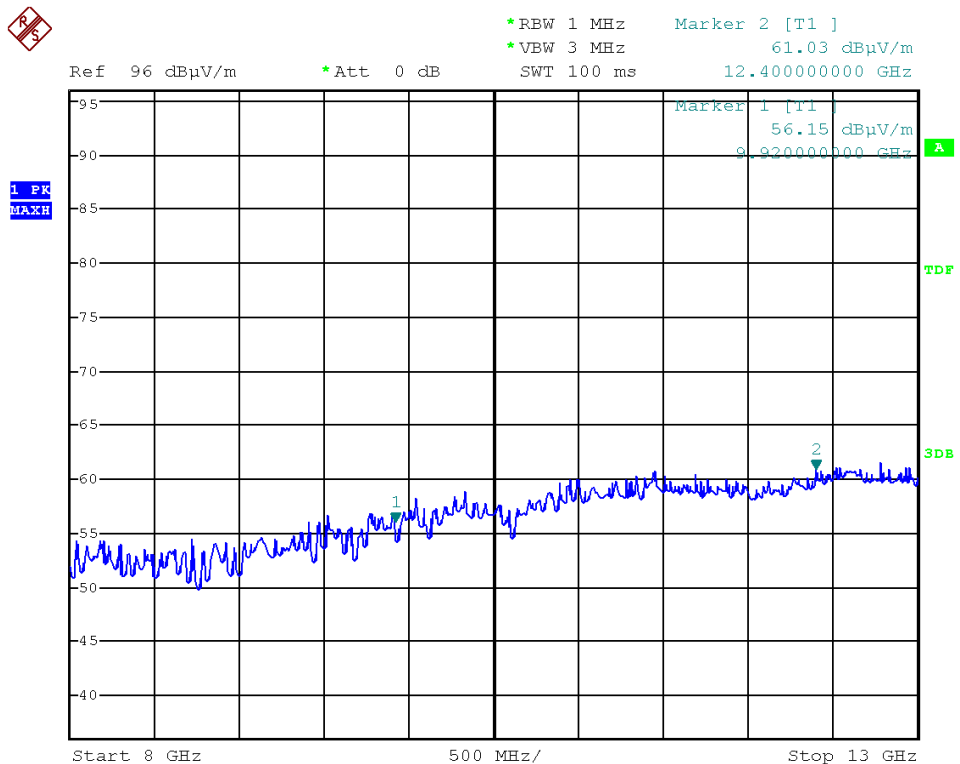


13 GHz÷17 GHz

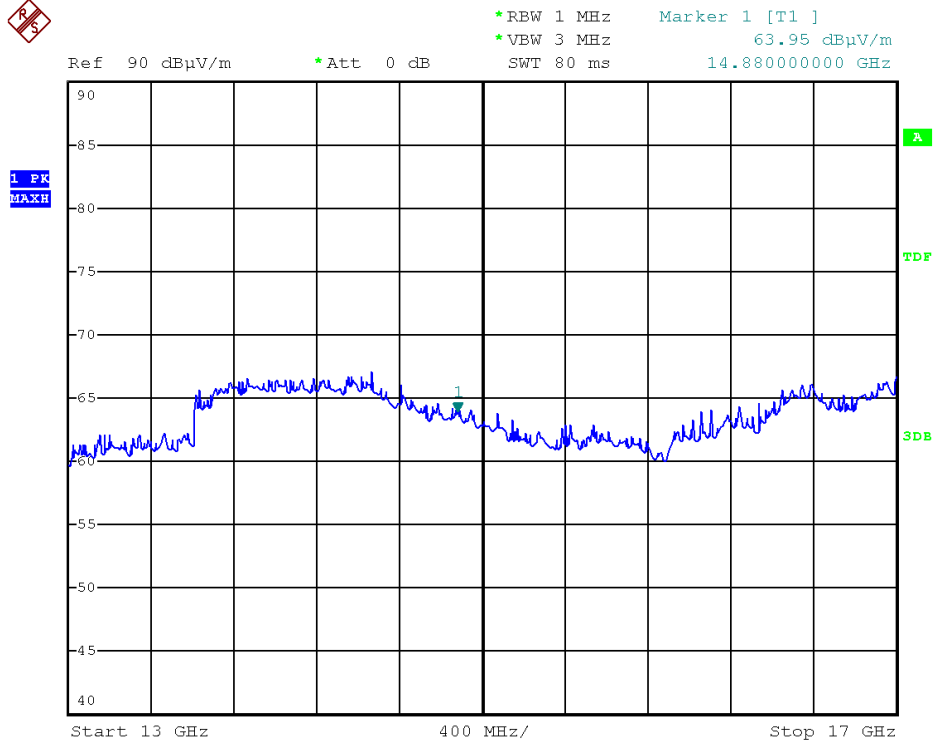

17 GHz÷25 GHz

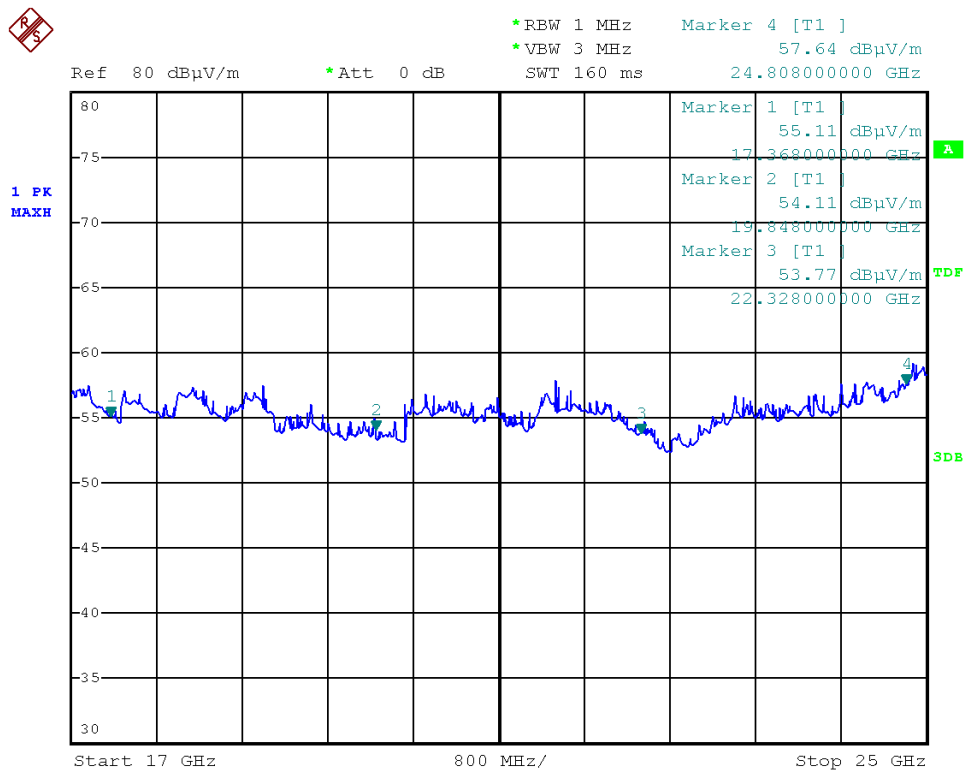

Fundamental 2480MHz

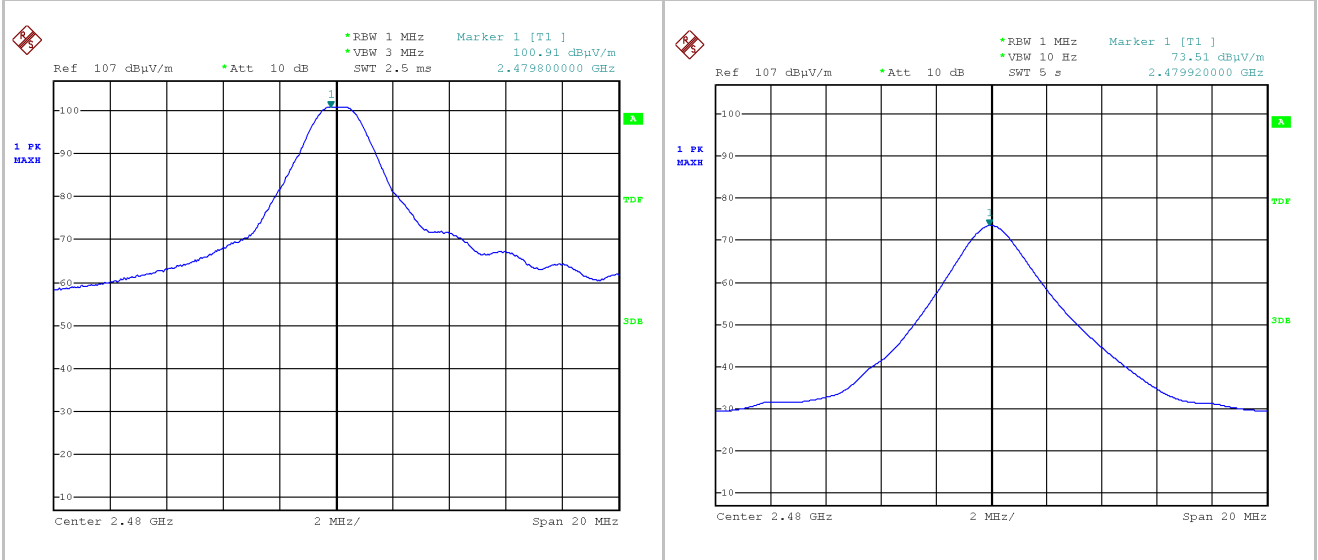



PEAK RESULT (RBW=1MHz; VBW=3MHz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	PK Limit (AV + 20dB)	PK Limit (AV + 20dB)	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
2480 (fundamental)	106.79	27.70	4.02	-37.60	100.91	-----	-----	-----

AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	AV Limit	AV Limit	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
2480 (fundamental)	79.39	27.70	4.02	-37.60	73.51	-----	-----	-----

2° Harmonic 4960MHz

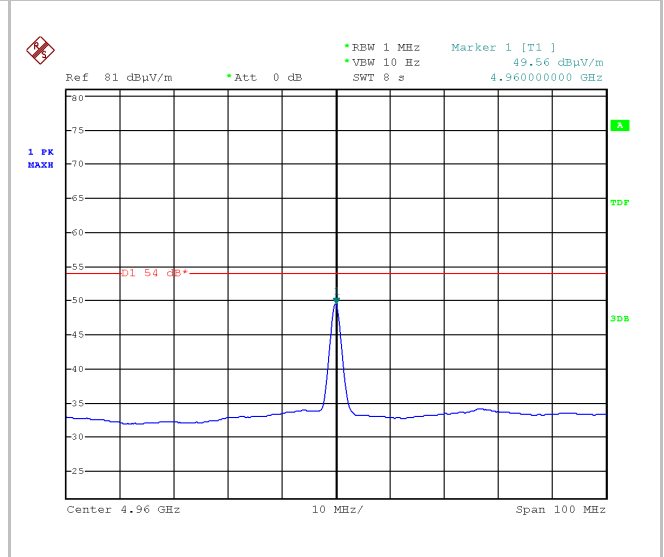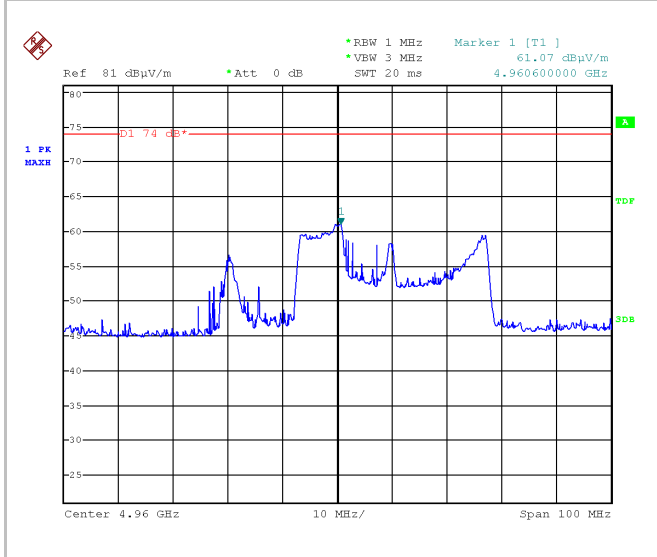



PEAK RESULT (RBW=1MHz; VBW=3MHz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	PK Limit (AV + 20dB)	PK Limit (AV + 20dB)	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
4960	60.35	31.30	6.24	-36.82	61.07	5000	74.00	>12

AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	AV Limit	AV Limit	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
4960	48.84	31.30	6.24	-36.82	49.56	500	54.00	>4

3° Harmonic 7440MHz

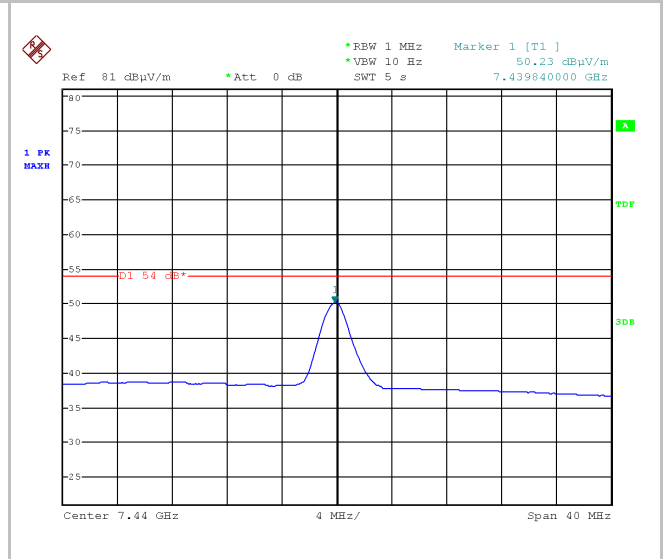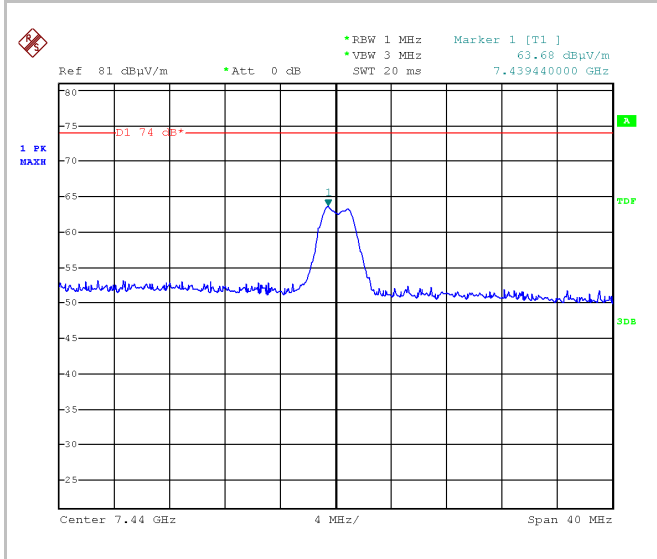



PEAK RESULT (RBW=1MHz; VBW=3MHz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	PK Limit (AV + 20dB)	PK Limit (AV + 20dB)	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
7440	58.68	36.50	6.23	-37.73	63.68	5000	74.00	>10

AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	AV Limit	AV Limit	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
7440	45.23	36.50	6.23	-37.73	50.23	500	54.00	>3

4° Harmonic 9920MHz

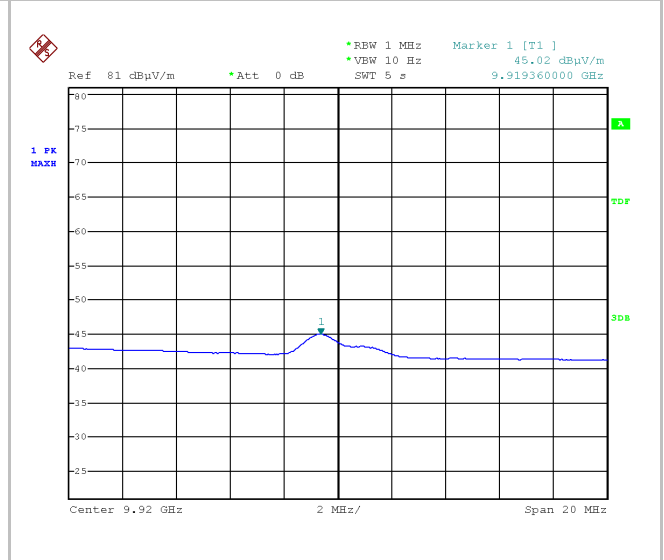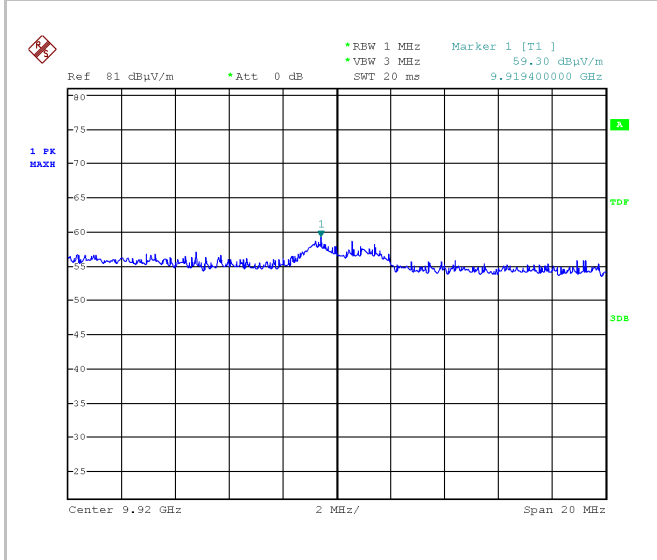


PEAK RESULT (RBW=1MHz; VBW=3MHz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	PK Limit (AV + 20dB)	PK Limit (AV + 20dB)	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
9920	50.35	38.50	8.54	-38.09	59.30	5000	74.00	>14

AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	AV Limit	AV Limit	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
9920	36.07	38.50	8.54	-38.09	45.02	500	54.00	>8

5° Harmonic 12400MHz

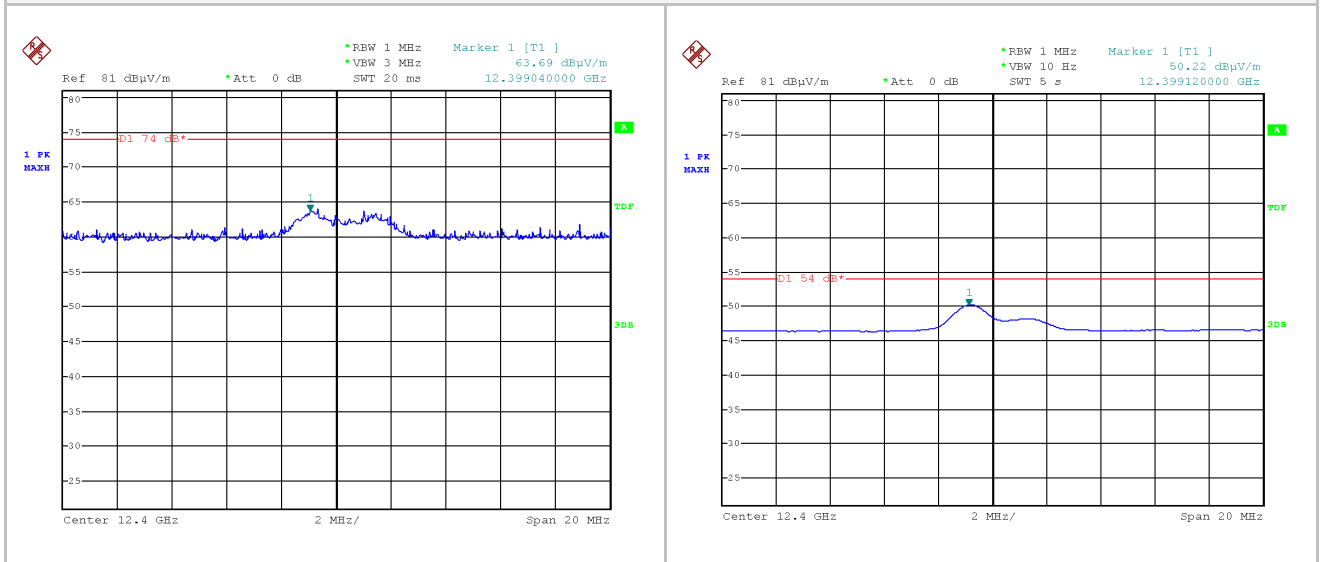



PEAK RESULT (RBW=1MHz; VBW=3MHz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	PK Limit (AV + 20dB)	PK Limit (AV + 20dB)	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
12400	52.28	38.40	9.01	-36.00	63.69	5000	74.00	>10

AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	AV Limit	AV Limit	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
12400	38.81	38.40	9.01	-36.00	50.22	500	54.00	>3

6° Harmonic 14880MHz

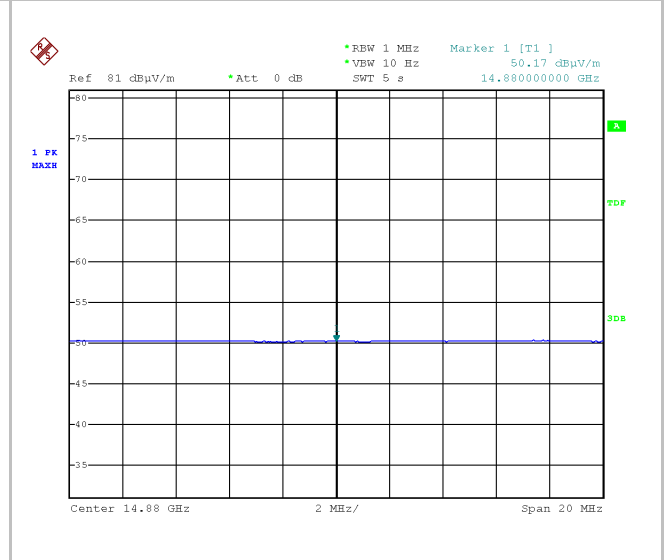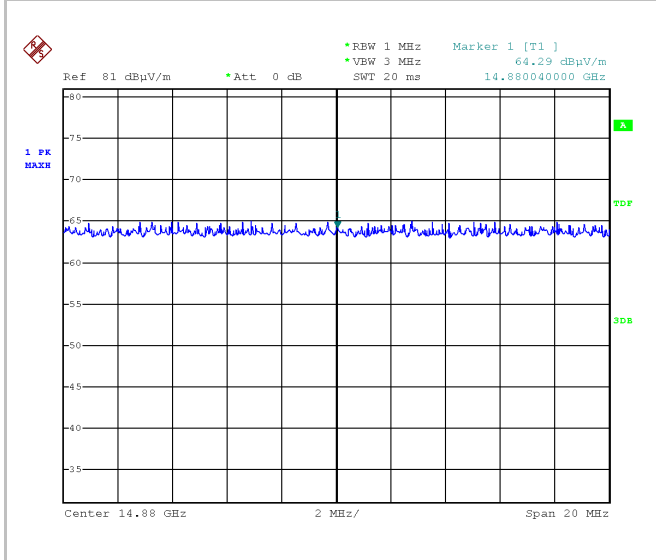


PEAK RESULT (RBW=1MHz; VBW=3MHz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	PK Limit (AV + 20dB)	PK Limit (AV + 20dB)	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
14880	49.54	39.90	10.27	-35.42	64.29	5000	74.00	>9

AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	AV Limit	AV Limit	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
14880	35.42	39.90	10.27	-35.42	50.17	500	54.00	>3

7° Harmonic 17360MHz

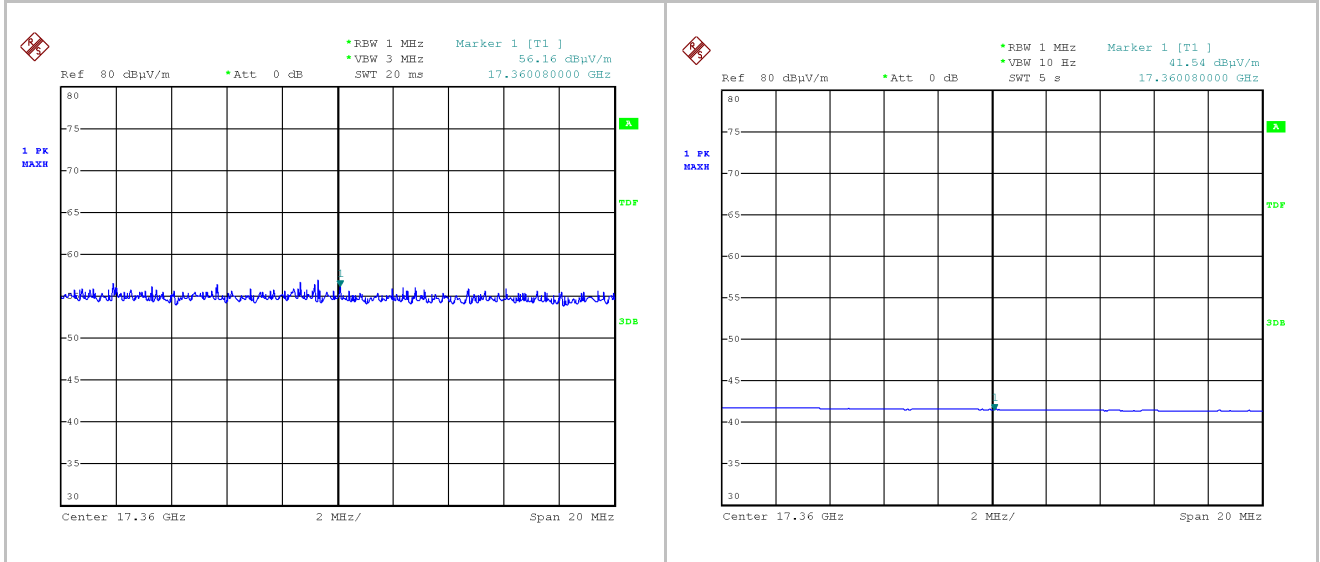


PEAK RESULT (RBW=1MHz; VBW=3MHz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	PK Limit (AV + 20dB)	PK Limit (AV + 20dB)	Margin
(MHz)	(dBµV)	(dB1/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
17360	43.56	37.90	4.80	-30.10	56.16	5000	74.00	>17

AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	AV Limit	AV Limit	Margin
(MHz)	(dBµV)	(dB1/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
17360	28.94	37.90	4.80	-30.10	41.54	500	54.00	>12

8° Harmonic 19840MHz

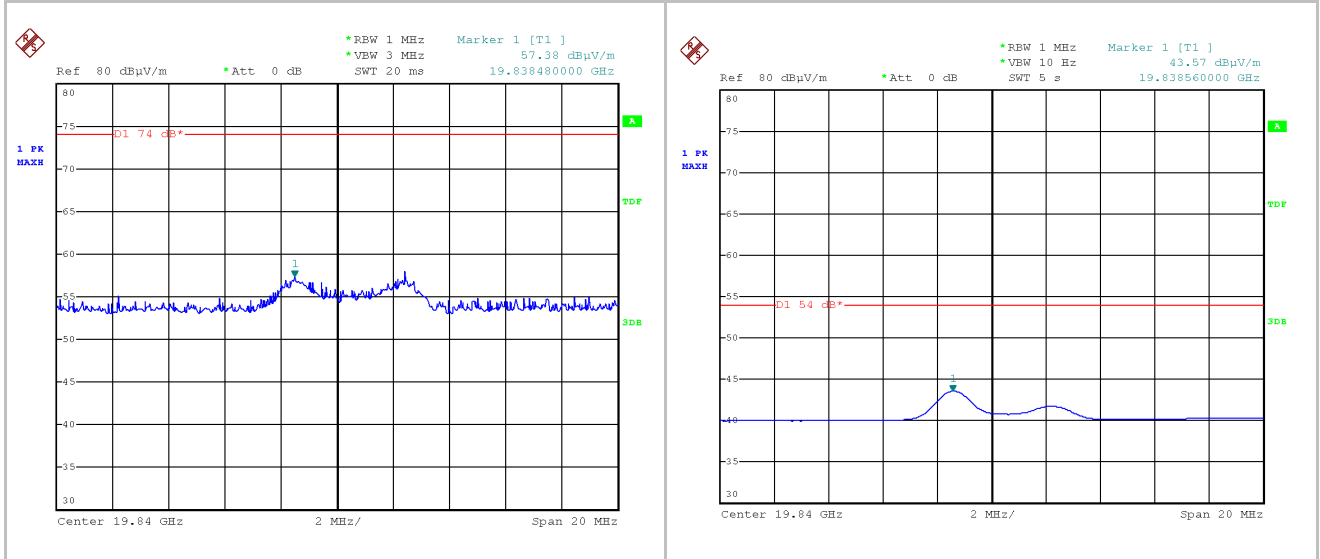



PEAK RESULT (RBW=1MHz; VBW=3MHz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	PK Limit (AV + 20dB)	PK Limit (AV + 20dB)	Margin
(MHz)	(dBµV)	(dB1/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
19840	47.96	37.82	5.30	-33.70	57.38	5000	74.00	>16

AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	AV Limit	AV Limit	Margin
(MHz)	(dBµV)	(dB1/m)	(dB)	(dB)	(dBµV/m)	(µV/m)	(dBµV/m)	(dB)
19840	34.15	37.82	5.30	-33.70	43.57	500	54.00	>10

9° Harmonic 22320MHz

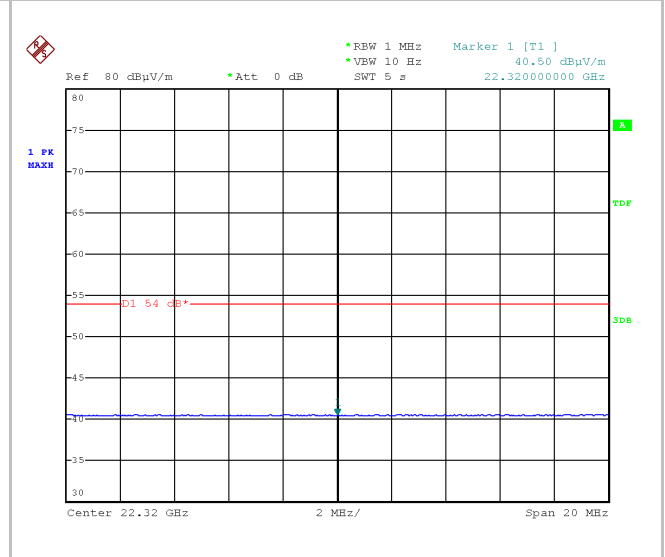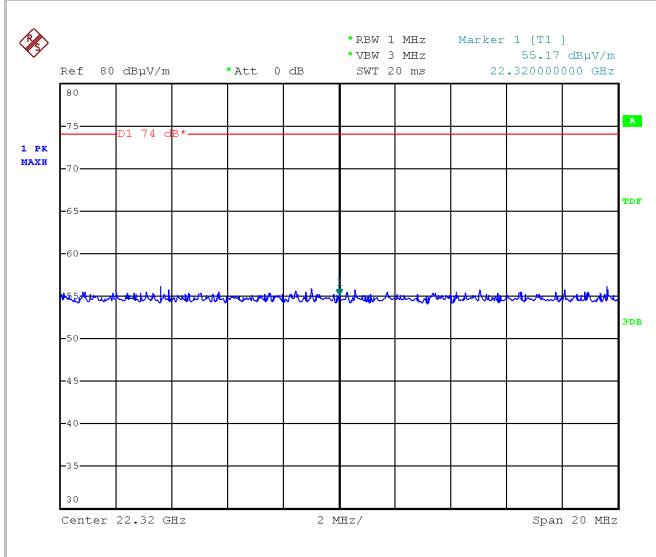



PEAK RESULT (RBW=1MHz; VBW=3MHz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	PK Limit (AV + 20dB)	PK Limit (AV + 20dB)	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(μV/m)	(dBμV/m)	(dB)
22320	44.94	38.23	5.30	-33.30	55.17	5000	74.00	>18

AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	AV Limit	AV Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(μV/m)	(dBμV/m)	(dB)
22320	30.27	38.23	5.30	-33.30	40.50	500	54.00	>13

10° Harmonic 24800MHz

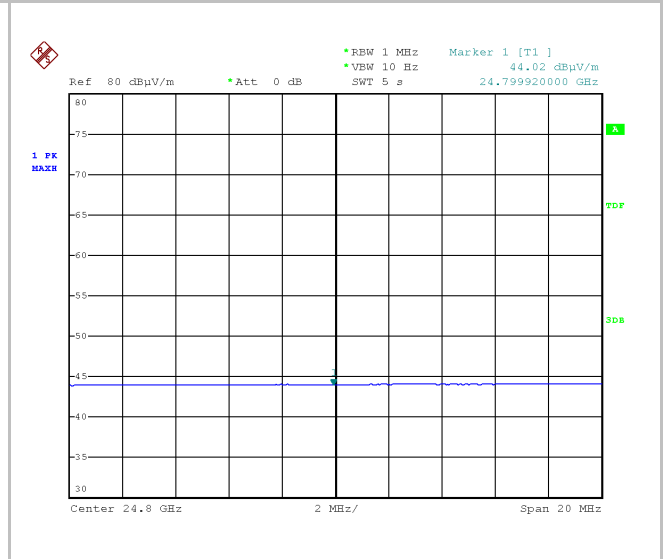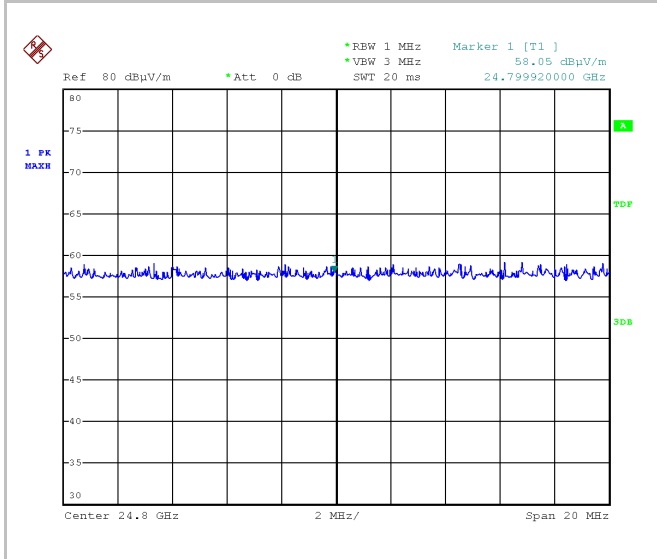

PEAK RESULT (RBW=1MHz; VBW=3MHz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	PK Limit (AV + 20dB)	PK Limit (AV + 20dB)	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(μV/m)	(dBμV/m)	(dB)
24800	45.82	39.13	5.60	-32.50	58.05	5000	74.00	>15

AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	AV Limit	AV Limit	Margin
(MHz)	(dBμV)	(dB1/m)	(dB)	(dB)	(dBμV/m)	(μV/m)	(dBμV/m)	(dB)
24800	31.79	39.13	5.60	-32.50	44.02	500	54.00	>9

NOTE: All the previous measures are the worst case on 3 axes X Y and Z and both polarization.

7.4 6 DB BANDWIDTH

TEST REQUIREMENT	
Spectrum analyzer settings	
Span	3 MHz
Resolution bandwidth (RBW)	100 kHz
Video bandwidth (VBW)	300 kHz
Sweep time (SWT)	2,5 ms
Detector function	Peak
Trace	max hold
Attenuator	/
Deviation to test procedure	None
EUT operating condition	#1
Remark	None
Testing dates	2017-01-23


TEST RESULT
The EUT meets the requirements of sections 15.247 (a) (2)

TEST PROCEDURE
The EUT is set to transmit has its maximum data rate. The Channel bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.


MEASUREMENTS RESULTS

Channel (No.)	Frequency (MHz)	Channel Bandwidth at -6dB (kHz)	Plot (No.)
Low	2402	708	1
Middle	2440	726	2
High	2480	744	3


Plot 1

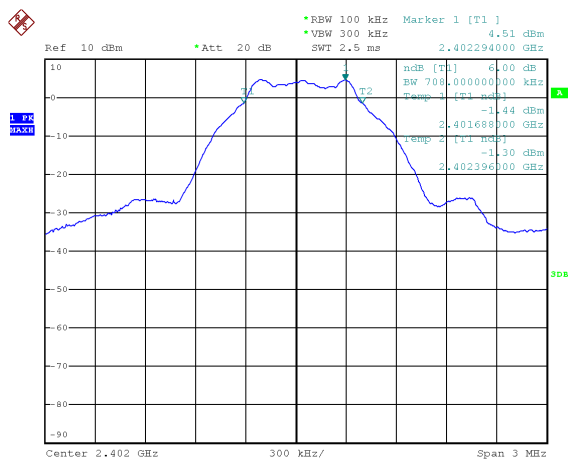

Plot 2

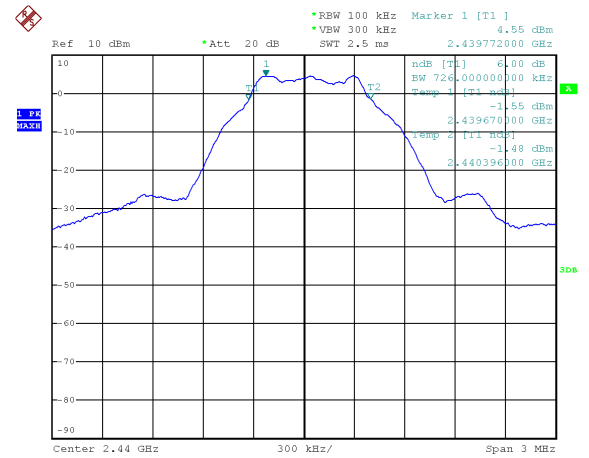

Plot 3

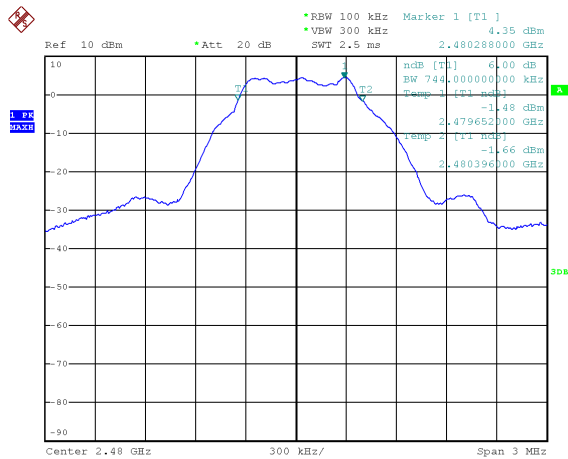

/

7.5 MAXIMUM PEAK OUTPUT POWER WITH EXTERNAL ANTENNA (DE FACTO EIRP)

TEST REQUIREMENT	
Spectrum analyzer settings	
Resolution bandwidth (RBW)	3 MHz
Video bandwidth (VBW)	10 MHz
Sweep time (SWT)	2,5 ms
Detector function	Peak
Trace	max hold
Test distance	3 meters (for radiated measurement)
EUT operating condition	#1
Remark	<p>eirp = $p_t \times g_t = (E \times d)^2 / 30$ where: p_t = transmitter output power in watts, g_t = numeric gain of the transmitting antenna (unitless) -0.2 dBi, E = electric field strength in V/m, d = measurement distance in meters (m).</p>
Testing dates	2017-01-23

TEST RESULT

The EUT meets the requirements of sections 15.247 (b) (3)

LIMITS

1 Watt (30dBm)

TEST PROCEDURE

Conducted measurements:

As the conducted measurement cannot be performed because the transmitter antenna is integrated has been carried out radiated measurement, according to KDB 558074 measurements guidance for DTS equipment.

Radiated measurements:


As the EUT is supplied with a dedicated antenna, the effective radiated power is measured in a 3 m anechoic chamber with the substitution antenna method.

The field strength levels shall be converted to equivalent conducted power levels for comparison to the applicable output power limit refer to KDB 412172.


MEASUREMENTS RESULTS (CONDUCTED)

Channel (No.)	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Plot (No.)
Low	2402	+5.24	+30	1
Middle	2440	+5.30	+30	2
High	2480	+5.06	+30	3


Plot 1

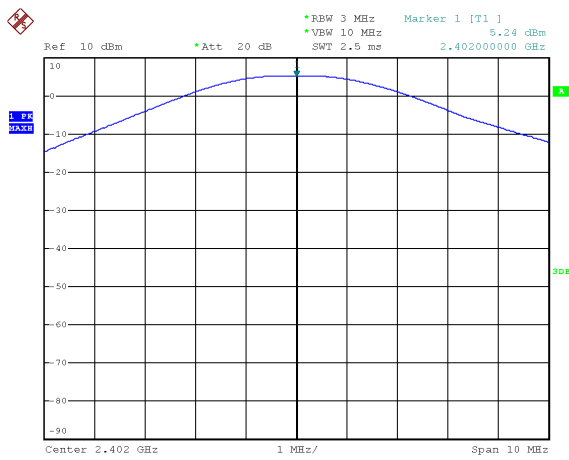

Plot 2

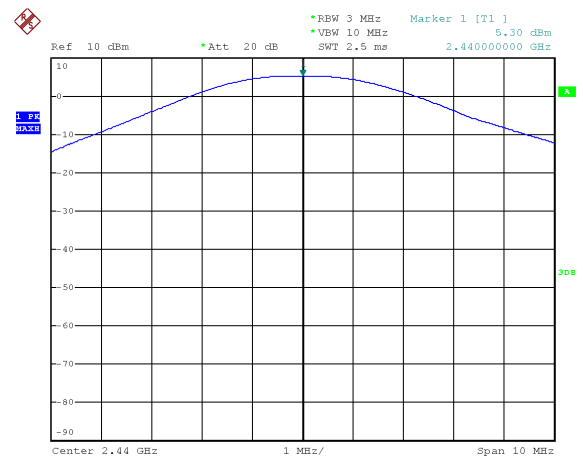

Plot 3

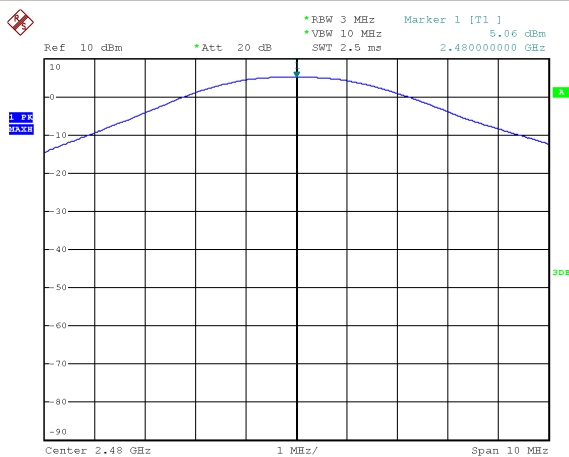

MEASUREMENTS RESULTS (RADIATED)

Channel (No.)	Frequency (MHz)	Radiated Output Power (at 3m. distance) (dB μ V/m)	Calculated E.I.R.P (dBm)	Limit (dBm)
Low	2402	99.75	+4.52	30
Middle	2440	101.09	+5.86	30
High	2480	100.91	+5.68	30

7.6 BAND-EDGE COMPLIANCE OF RF EMISSIONS

TEST REQUIREMENT	
Spectrum analyzer settings	
Span	Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation
Resolution bandwidth (RBW)	1 MHz (100 kHz band-edge)
Video bandwidth (VBW)	1 MHz (100 kHz band-edge)
Sweep time (SWT)	Auto
Detector function	Peak
Trace	Max hold
Attenuator	/
Deviation to test procedure	None
EUT operating condition	#1
Remark	None
Testing dates	2017-01-20 ÷ 2017-01-23


TEST RESULT
The EUT meets the requirements of sections 15.247 (d) All out of band spurious emissions are more 20 dB below the in band power of the fundamental.

LIMITS
-20 dB below peak output power

TEST PROCEDURE
Only for measuring emissions up to 2 MHz removed from the band-edge the "delta" technique for Radiated emissions was used. Delta technique: The transmitter output was connected to the spectrum analyser through a test fixture (radio frequency coupling device associated with the dedicated antenna of the equipment under test) Once the trace is stabilized, by the marker the emission at the band edge (or on the highest modulation product outside of the band, if this level is greater than that at the band edge) was set. The "n" by the marker-delta function and the marker-to-peak function the peak of the in-band emission was selected. The marker-delta value displayed was compared with the limit specified in this Section


Radiated Band-edge compliance - Lower band edge

Peak Detector

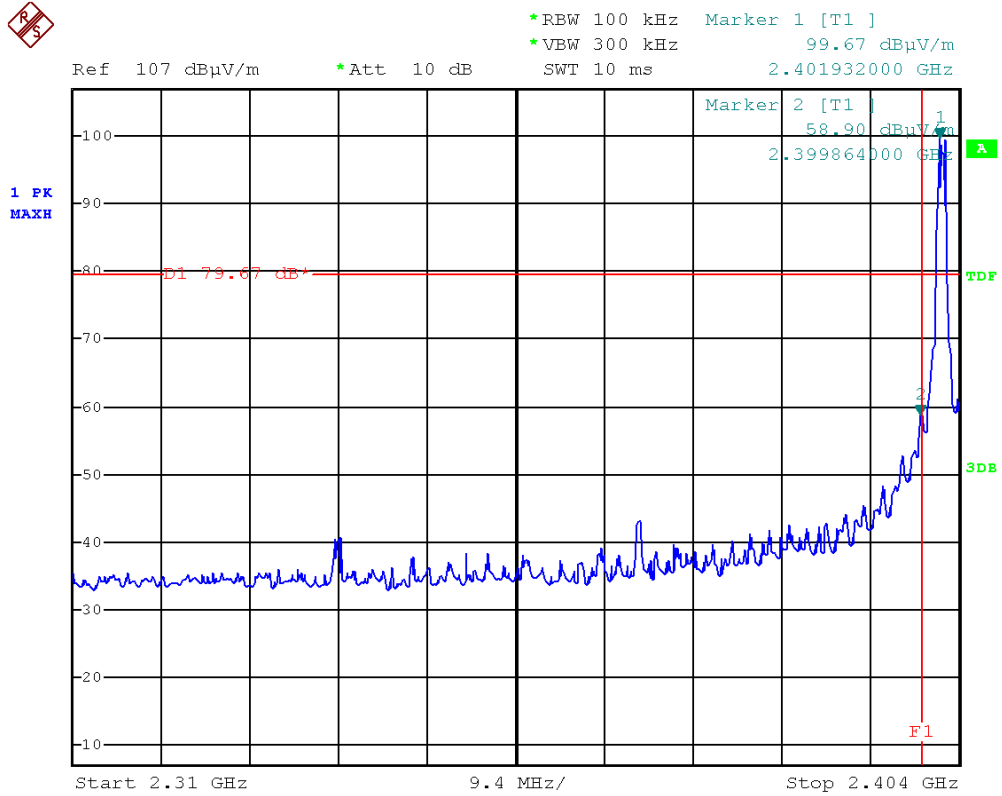

Spurious Emission in restricted band near 2400-2483.5 MHz

Peak Detector

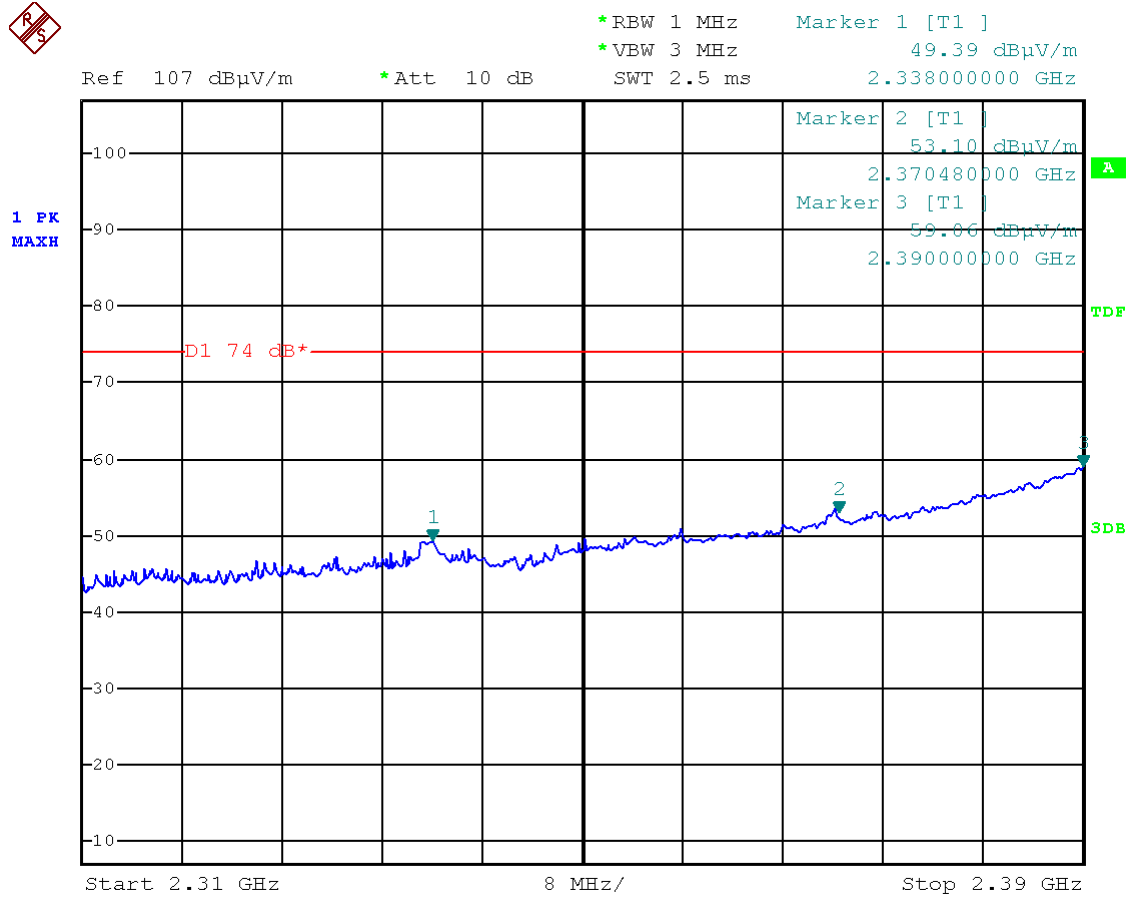


PEAK RESULT (RBW=1MHz; VBW=3MHz)

Frequency (MHz)	Reading value (dBµV)	Antenna Factor (dB3/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Correcting reading (dBµV/m)	PK Limit (µV/m)	PK Limit (dBµV/m)	Margin (dB)
2338.00	55.15	27.70	4.14	-37.60	49.39	5000	74.00	24.61
2370.48	58.86	27.70	4.14	-37.60	53.10	5000	74.00	20.90
2390.00	64.82	27.70	4.14	-37.60	59.06	5000	74.00	14.94

NOTE: The measures above are the worst case on 3 axes X Y and Z and both polarization.


Radiated Band-edge compliance - Lower band edge

Average

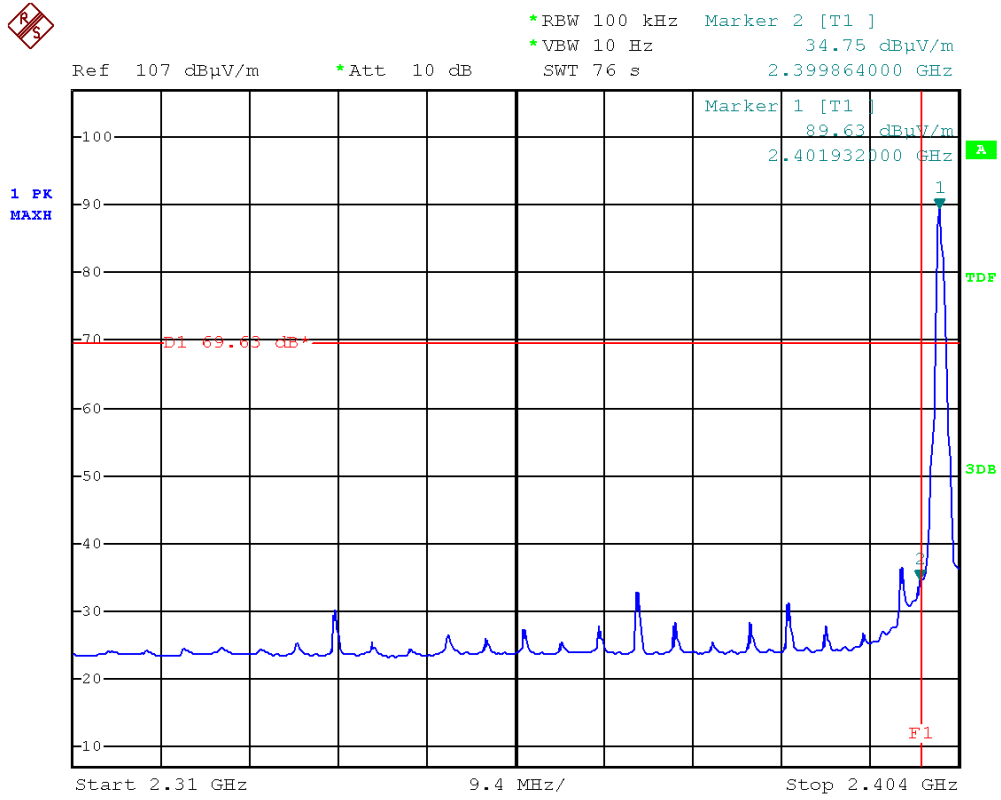

Spurious Emission in restricted band near 2400-2483.5 MHz

Average Detector

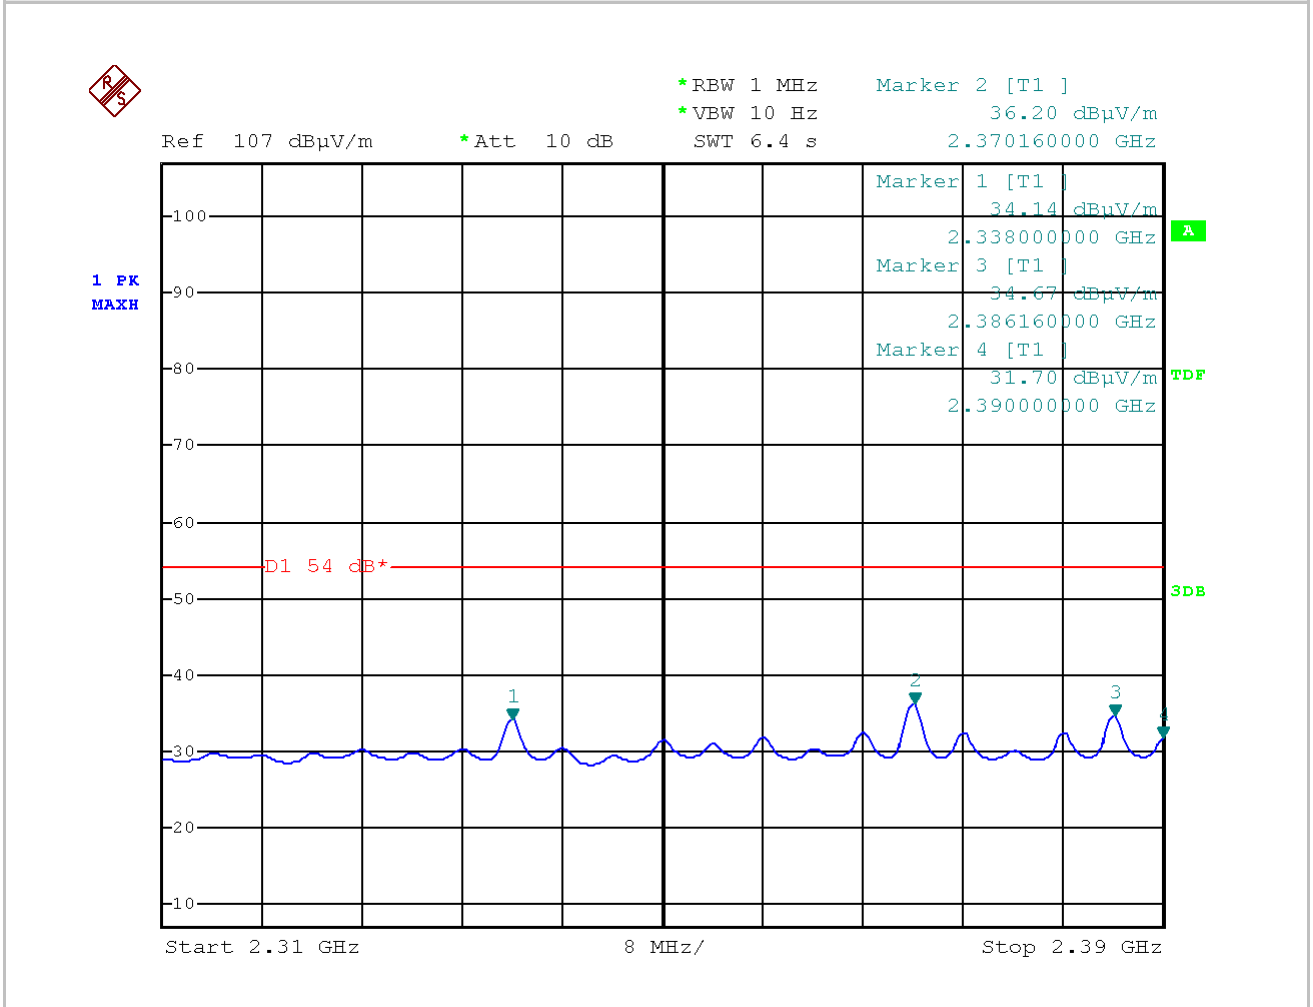


AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency (MHz)	Reading value (dBµV)	Antenna Factor (dB3/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Correcting reading (dBµV/m)	AV Limit (µV/m)	AV Limit (dBµV/m)	Margin (dB)
2338.00	39.90	27.70	4.14	-37.60	34.14	500	54.00	19.86
2370.16	41.96	27.70	4.14	-37.60	36.20	500	54.00	17.80
2386.16	40.43	27.70	4.14	-37.60	34.67	500	54.00	19.33
2390.00	37.46	27.70	4.14	-37.60	31.70	500	54.00	22.30

NOTE: The measures above are the worst case on 3 axes X Y and Z and both polarization.


Conducted Band-edge compliance - Lower band edge

Peak Detector

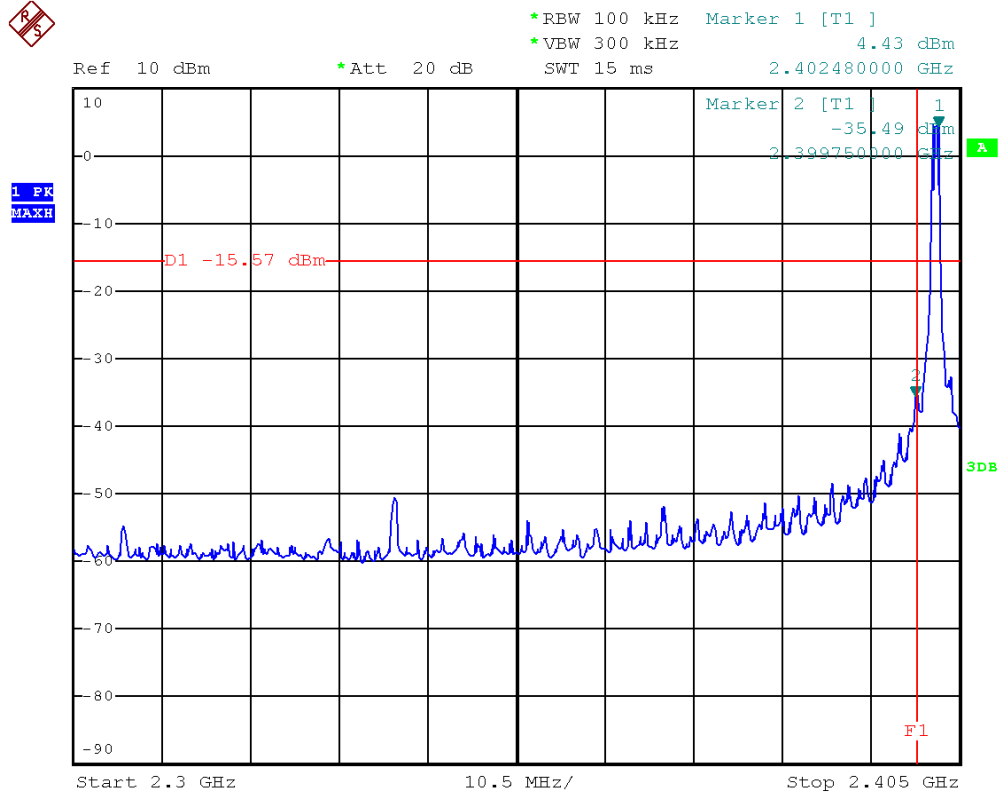


Conducted Band-edge compliance - Lower band edge

Average

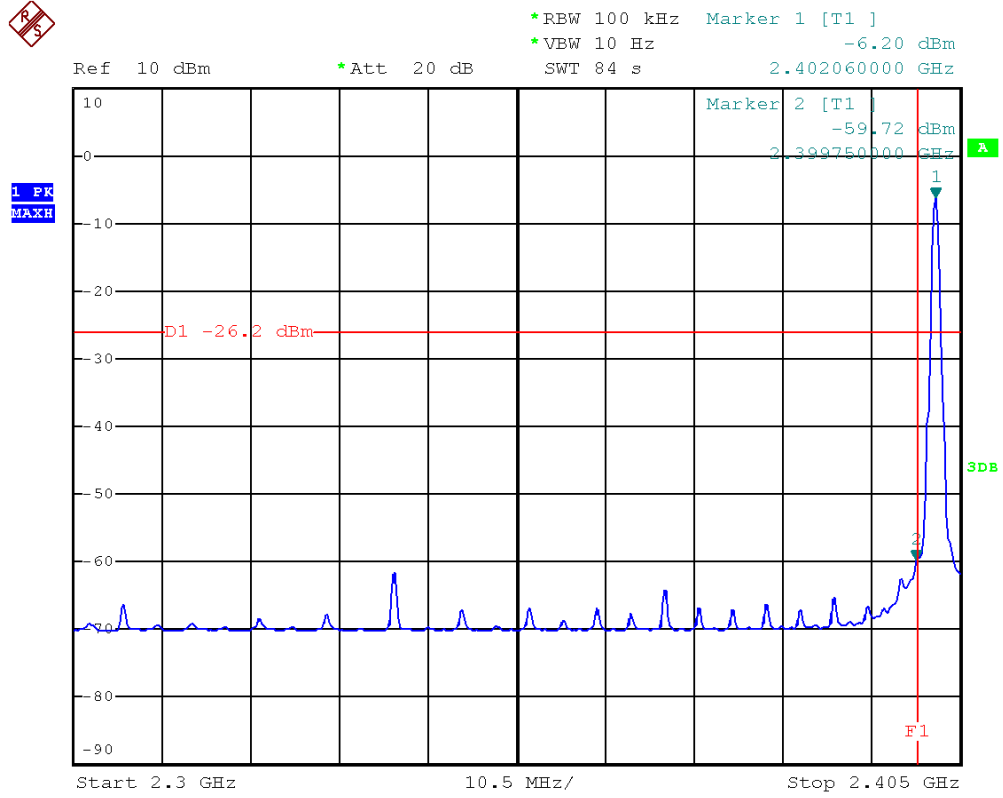


Radiated Band-edge compliance - Higher band edge

Peak Detector

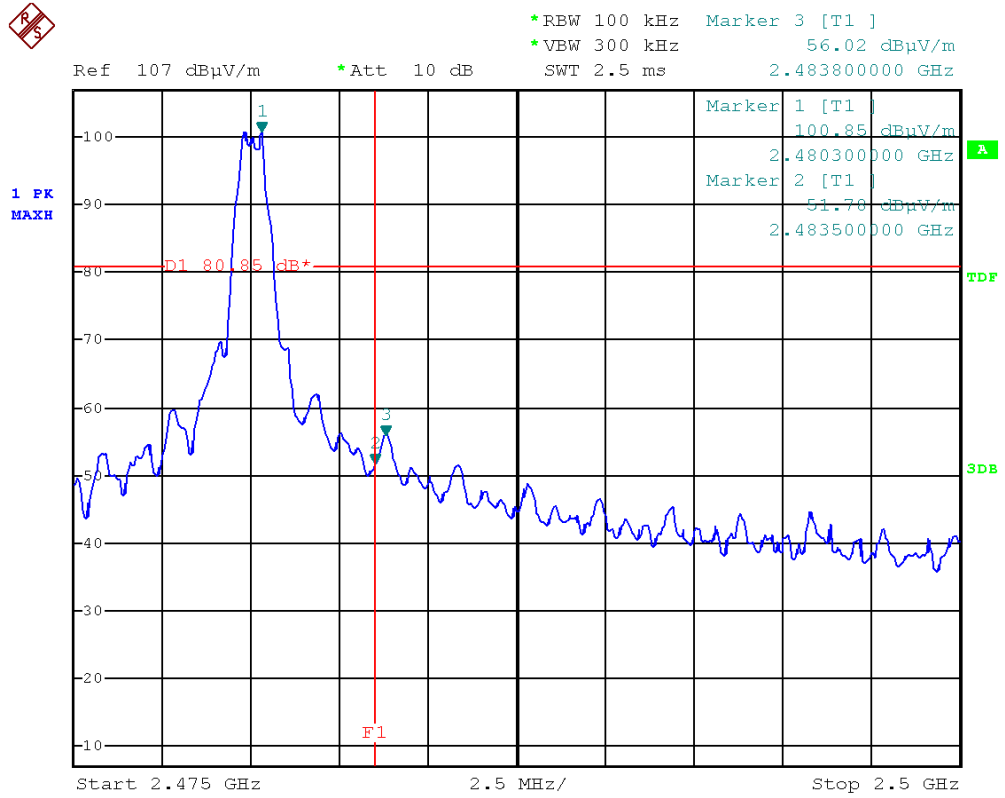

Spurious Emission in restricted band near 2400-2483.5 MHz

Peak Detector

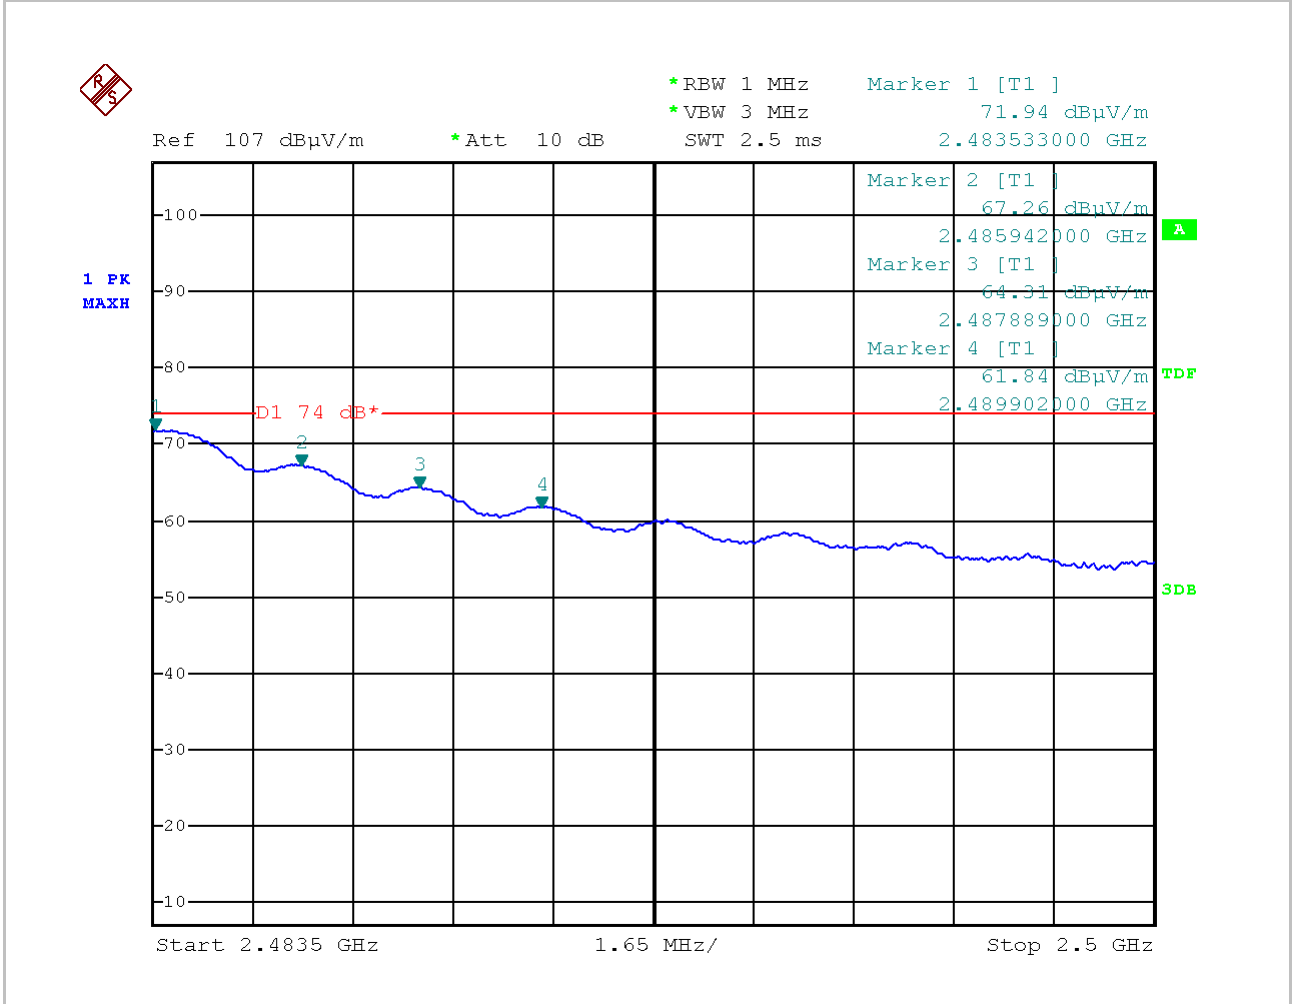

PEAK RESULT (RBW=1MHz; VBW=3MHz)

Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading	PK Limit	PK Limit	Margin
(MHz)	(dBμV)	(dB3/m)	(dB)	(dB)	(dBμV/m)	(μV/m)	(dBμV/m)	(dB)
2483.53	77.82	27.70	4.02	-37.60	71.94	5000	74.00	2.06
2485.94	73.14	27.70	4.02	-37.60	67.26	5000	74.00	6.74
2487.89	70.19	27.70	4.02	-37.60	64.31	5000	74.00	9.69
2489.90	67.72	27.70	4.02	-37.60	61.84	5000	74.00	12.16

NOTE: The measures above are the worst case on 3 axes X Y and Z and both polarization.

Radiated Band-edge compliance - Higher band edge

Average Detector



Ref 107 dBµV/m

*Att 10 dB

*RBW 100 kHz

Marker 1 [T1]


*VBW 10 Hz

90.80 dBµV/m

SWT 20 s


2.479800000 GHz

1 PK
MAXH

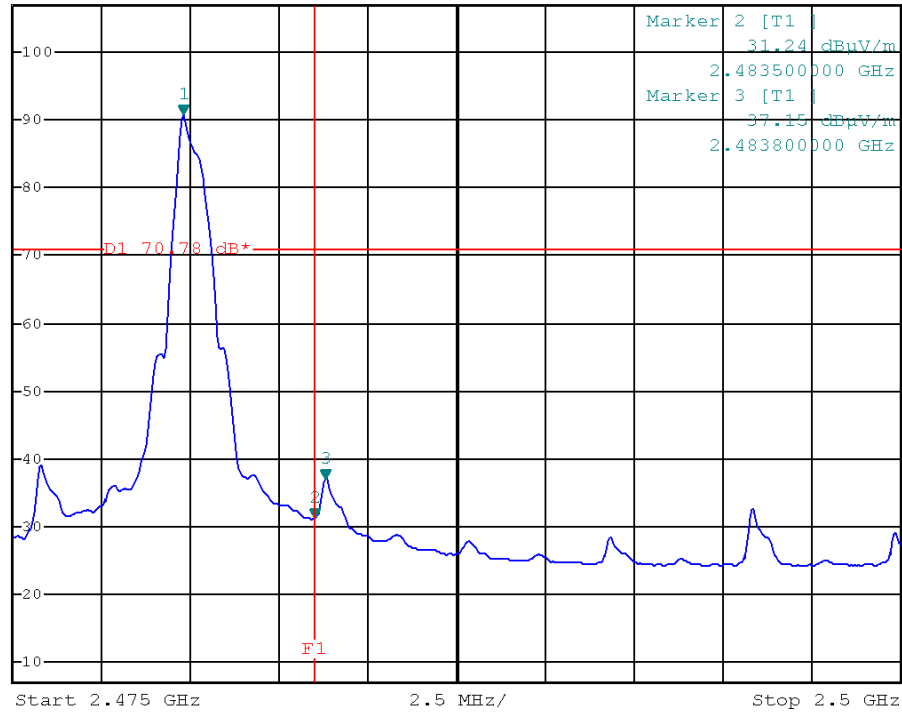

Spurious Emission in restricted band near 2400-2483.5 MHz

Average Detector

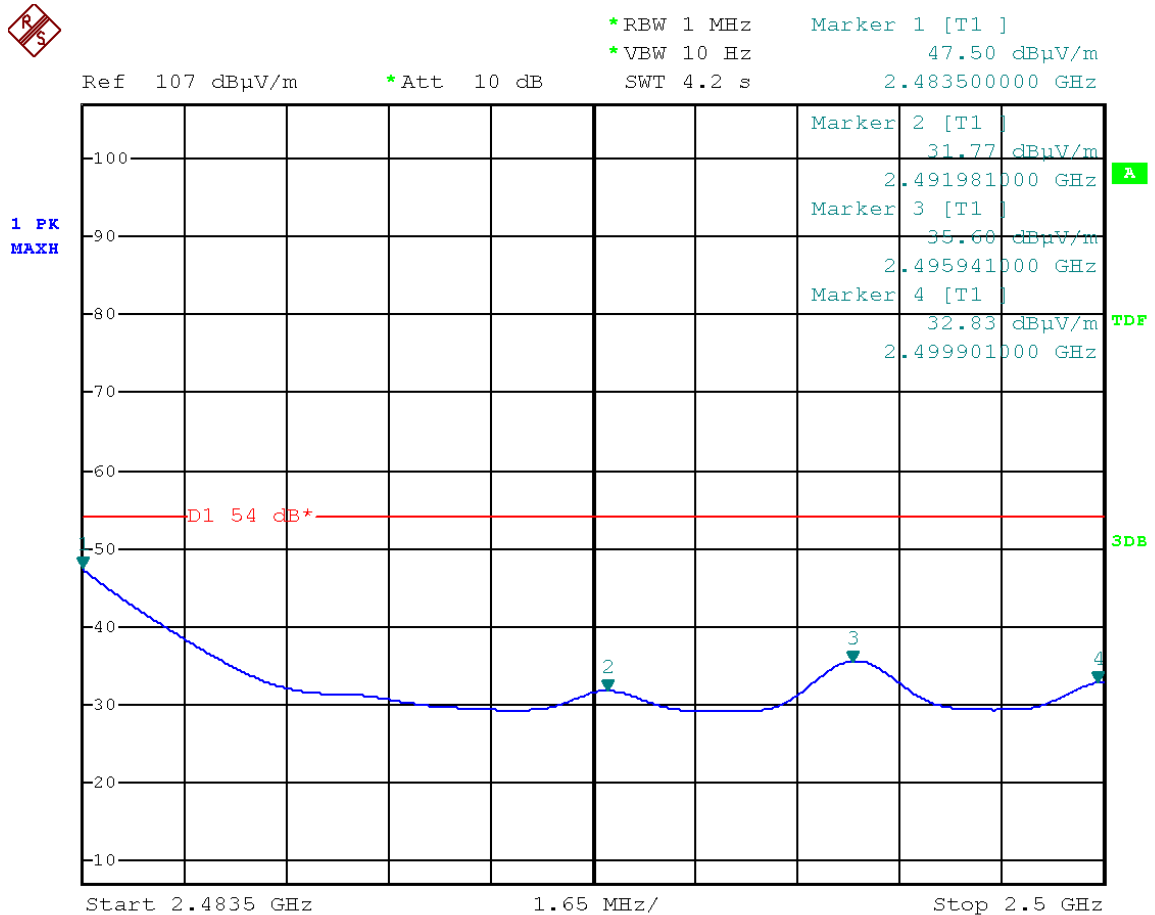


AVERAGE RESULT (RBW=1MHz; VBW=10Hz)

Frequency (MHz)	Reading value (dBμV)	Antenna Factor (dB3/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Correcting reading (dBμV/m)	AV Limit (μV/m)	AV Limit (dBμV/m)	Margin (dB)
2483.50	53.38	27.70	4.02	-37.60	47.50	500	54.00	6.50
2491.98	37.65	27.70	4.02	-37.60	31.77	500	54.00	22.23
2495.94	41.48	27.70	4.02	-37.60	35.60	500	54.00	18.40
2499.90	38.71	27.70	4.02	-37.60	32.83	500	54.00	21.17

NOTE: The measures above are the worst case on 3 axes X Y and Z and both polarization.


Conducted Band-edge compliance - Higher band edge

Peak Detector

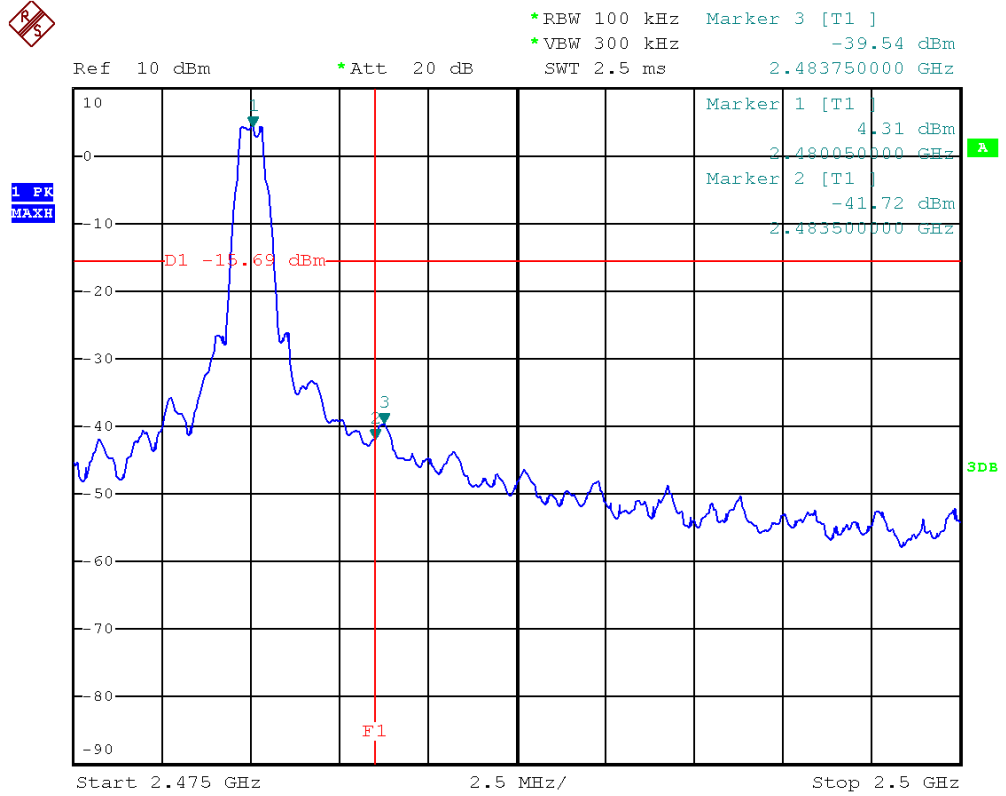

Conducted Band-edge compliance - Higher band edge

Average Detector

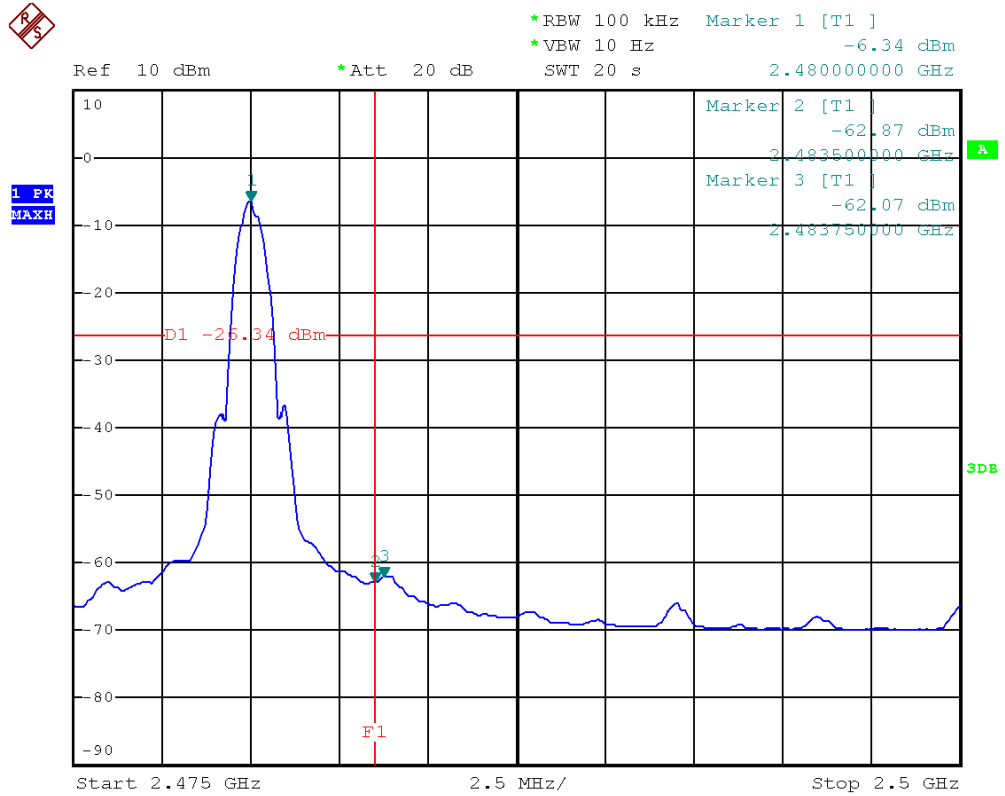

7.7 OUT-OF-BAND EMISSIONS

TEST REQUIREMENT	
Spectrum analyzer settings	
Span	/
Resolution bandwidth (RBW)	100 kHz
Video bandwidth (VBW)	300 kHz
Sweep time (SWT)	as necessary to capture the entire dwell time
Detector function	Peak
Trace	Max hold
Attenuator	/
Deviation to test procedure	None
EUT operating condition	#1
Remark	None
Testing dates	2017-01-24


TEST PROCEDURE
<p>A spectrum analyzer is connected to the antenna port of the transmitter.</p> <p>The measure has been executed with the lowest transmit channel, the highest transmit channel and one located somewhere in the middle of the band.</p> <p>The measurement takes into account the loss generated by the used cable.</p>

LIMITS
-20 dB below peak output power


TEST RESULT
<p>The EUT meets the requirements of sections 15.247 (d)</p> <p>All out of band spurious emissions are more 20 dB below the in band power of the fundamental.</p>

MEASUREMENTS RESULTS - CONDUCTED
LOWER CHANNEL 2402MHZ


Plot 1 (30÷1000MHz)

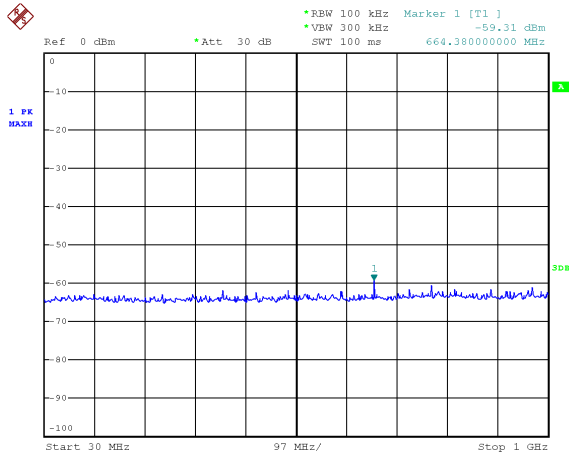


Plot 2 (1÷3GHz)

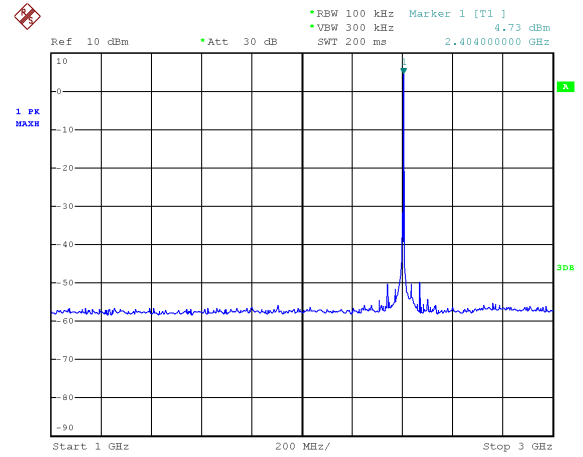


Plot 3 (3÷10GHz)

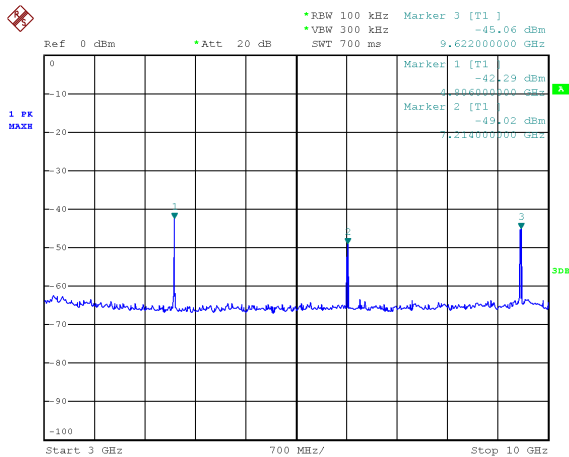


Plot 4 (10÷15GHz)

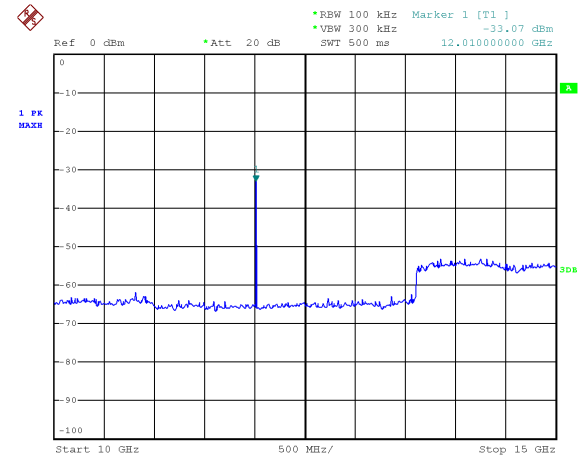

Plot 5 (15÷20GHz)

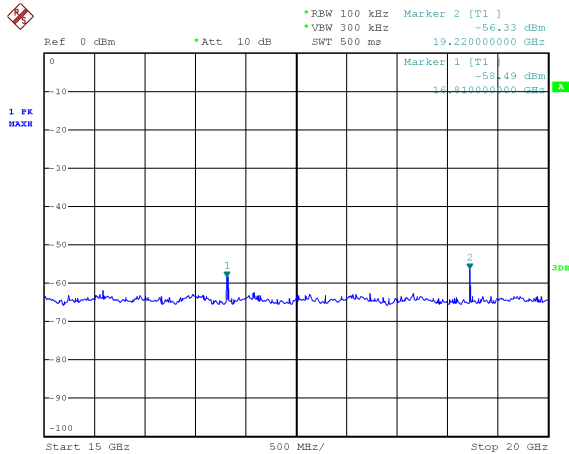


Plot 6 (20÷25GHz)

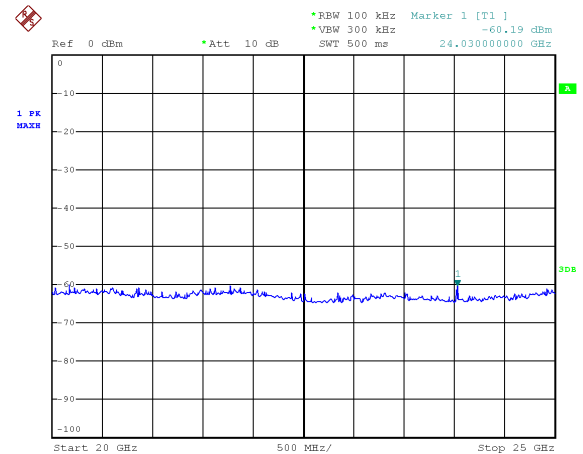


MIDDLE CHANNEL 2440MHZ


Plot 1 (30÷1000MHz)

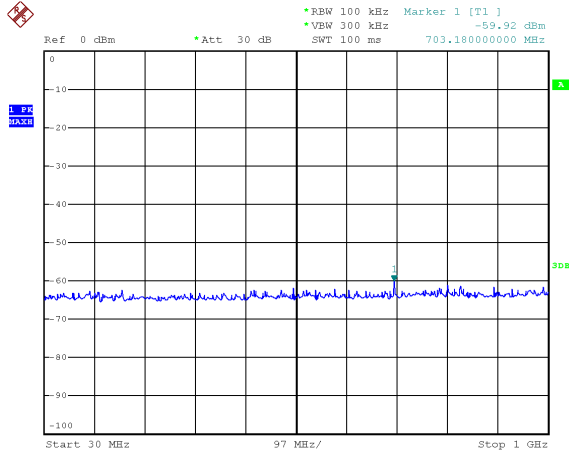


Plot 2 (1÷3GHz)

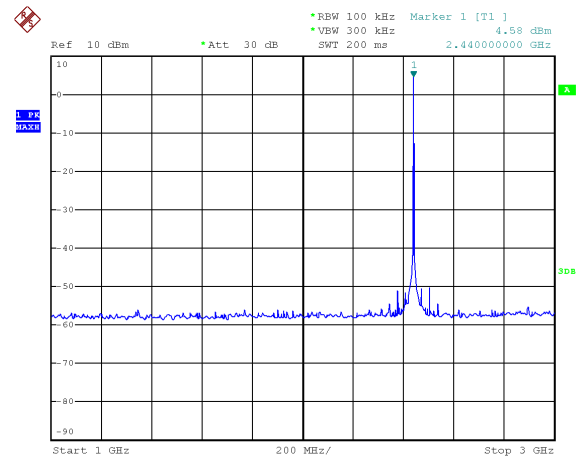


Plot 3 (3÷10GHz)

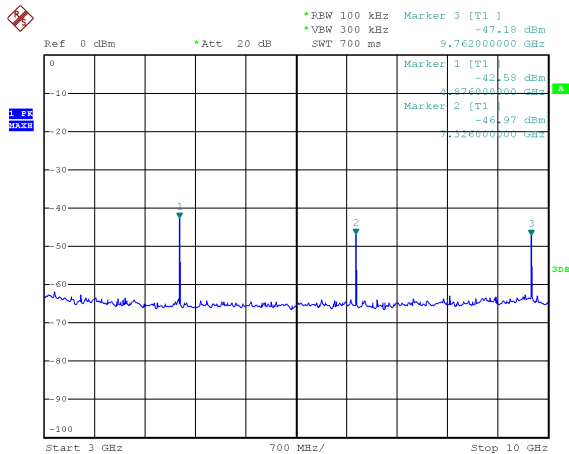


Plot 4 (10÷15GHz)

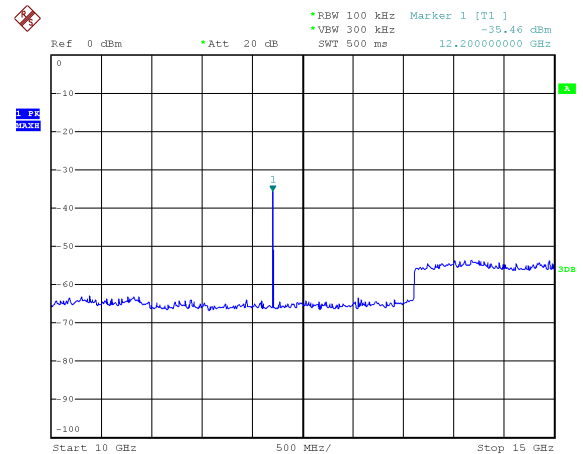

Plot 5 (15÷20GHz)

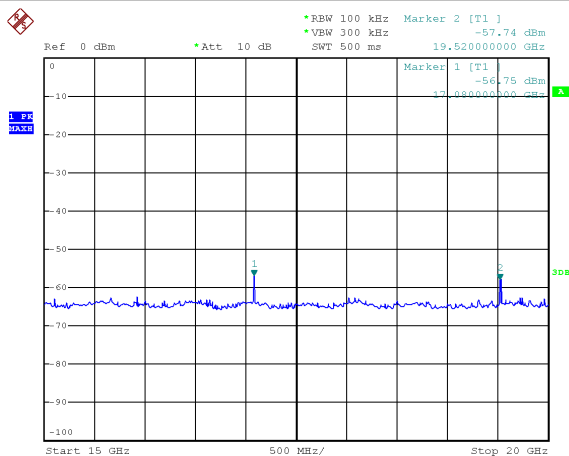


Plot 6 (20÷25GHz)

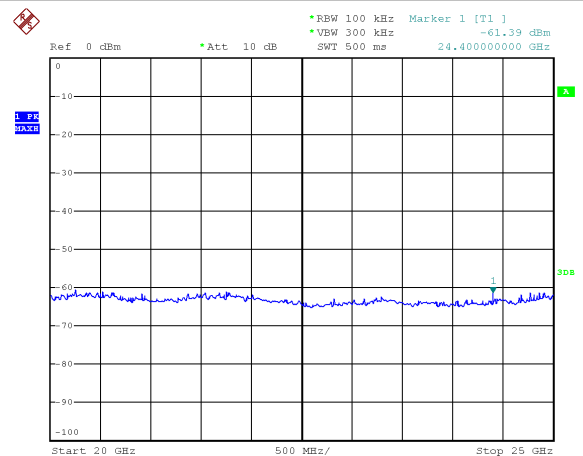


HIGHER CHANNEL 2480MHZ


Plot 1 (30÷1000MHz)

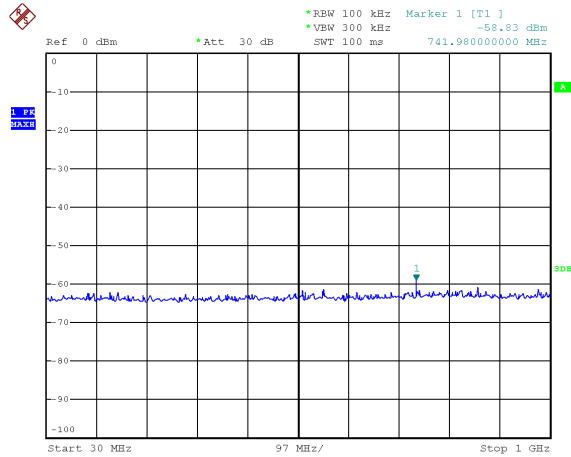


Plot 2 (1÷3GHz)

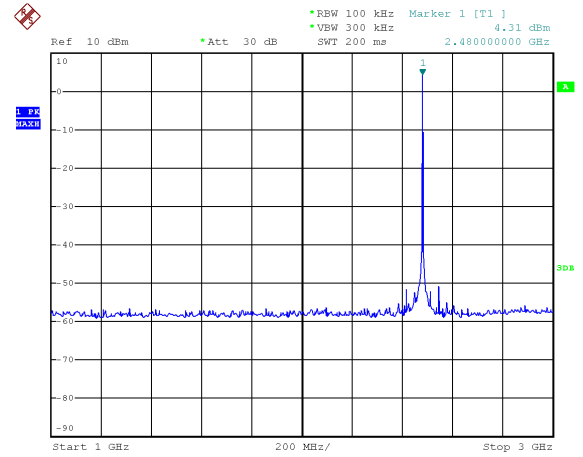


Plot 3 (3÷10GHz)

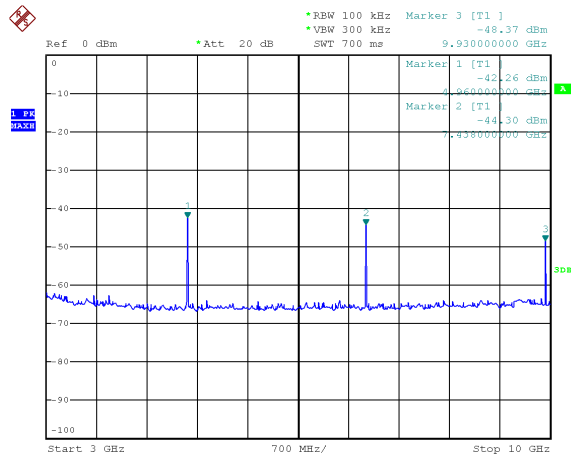


Plot 4 (10÷15GHz)

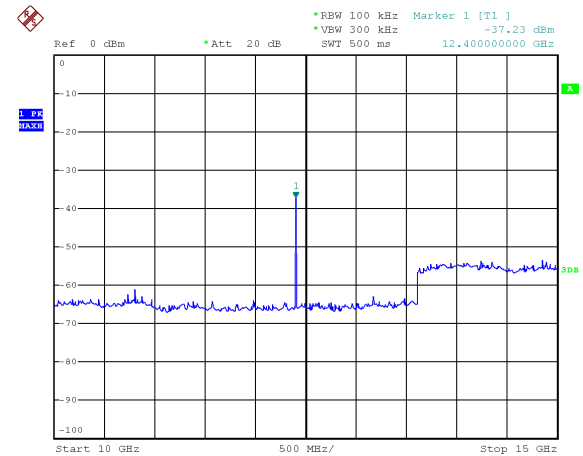

Plot 5 (15÷20GHz)

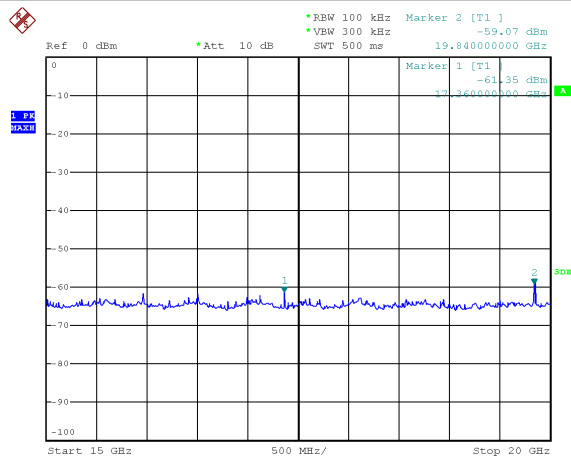

Plot 6 (20÷25GHz)

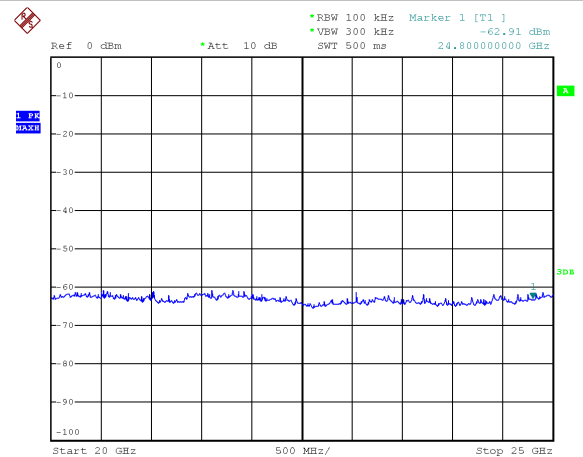

7.8 TRANSMITTER POWER SPECTRAL DENSITY

TEST REQUIREMENT	
Spectrum analyzer settings	
Span	10 MHz
Resolution bandwidth (RBW)	3 kHz
Video bandwidth (VBW)	10 kHz
Sweep time (SWT)	500 s
Detector function	Peak
Trace	Max hold
Attenuator	/
Deviation to test procedure	None
EUT operating condition	#1
Remark	None
Testing dates	2017-01-24

TEST RESULT
The EUT meets the requirements of sections 15.247 (e)


LIMITS
8 dBm in 3 kHz bandwidth.

TEST PROCEDURE
After trace stabilisation the marker shall be set on the signal peak. The indicated level is the power spectral density.


MEASUREMENTS RESULTS

Channel (No.)	Frequency (MHz)	Transmitter power on 3 kHz band (dBm)	Plot (No.)
Low	2.402	-10.34	1
Middle	2.440	-10.34	2
High	2.480	-10.59	3


Plot 1

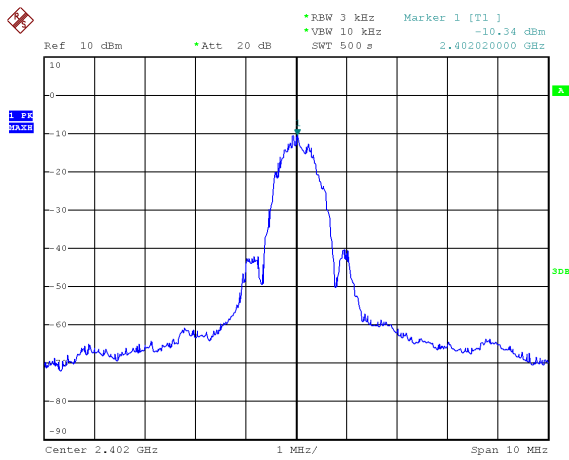

Plot 2

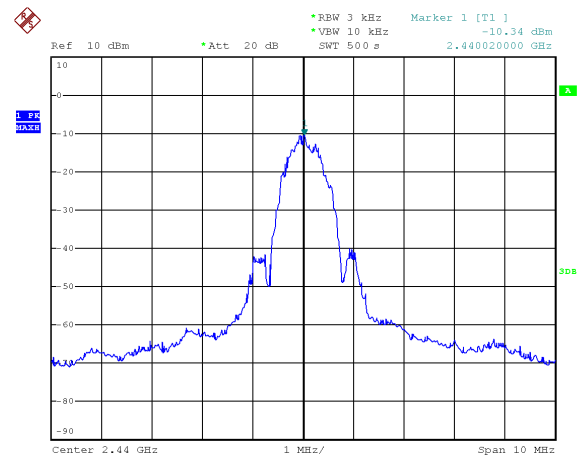

Plot 3

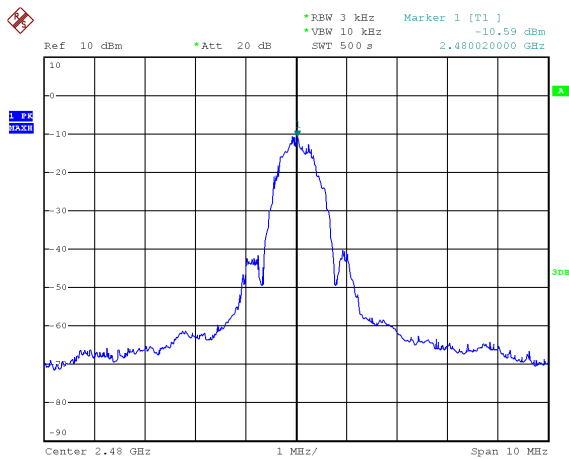

7.9 RF EXPOSURE EVALUATION

TEST REQUIREMENT

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines § 1.1307(b)(1).

EUT classification (fixed, mobile or portable devices)	Portable according to § 2.1093(b) of this Chapter
LIMITS	According to § 2.1093 of this Chapter, by means of the following guidelines: OET Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies (447498 D01 General RF Exposure Guidance v06)
Testing dates	2017-01-24

SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and ≤ 50 mm

447498 D01 General RF Exposure Guidance v06 – Appendix A

MHz	5	10	15	20	25	mm
150	39	77	116	155	194	SAR Test Exclusion Threshold (mW)
300	27	55	82	110	137	
450	22	45	67	89	112	
835	16	33	49	66	82	
900	16	32	47	63	79	
1500	12	24	37	49	61	
1900	11	22	33	44	54	
2450	10	19	29	38	48	
3600	8	16	24	32	40	
5200	7	13	20	26	33	
5400	6	13	19	26	32	
5800	6	12	19	25	31	

The *test separation distances* ≥ 5 mm is applied to determine SAR test exclusion.

SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and ≤ 50 mm

447498 D01 General RF Exposure Guidance v06 – Appendix A

Channel No.	Frequency (MHz)	Conducted Output Power	E.I.R.P.	Distance	$\frac{\text{max. power (mW)}}{\text{min. distance (mm)}} \times \sqrt{f(\text{GHz})}$	Limits
		(dBm)	(mW)	(mm)		
Lowest	2402	5.24	3.34	5	1.035	≤ 3.0 for 1-g head SAR or ≤ 7.5 for 10-g extremity SAR

Channel No.	Frequency (MHz)	Conducted Output Power	E.I.R.P.	Distance	$\frac{\text{max. power (mW)}}{\text{min. distance (mm)}} \times \sqrt{f(\text{GHz})}$	Limits
		(dBm)	(mW)	(mm)		
Middle	2440	5.30	3.39	5	1.059	≤ 3.0 for 1-g head SAR or ≤ 7.5 for 10-g extremity SAR

Channel No.	Frequency (MHz)	Conducted Output Power	E.I.R.P.	Distance	$\frac{\text{max. power (mW)}}{\text{min. distance (mm)}} \times \sqrt{f(\text{GHz})}$	Limits
		(dBm)	(mW)	(mm)		
Highest	2480	5.06	3.20	5	1.007	≤ 3.0 for 1-g head SAR or ≤ 7.5 for 10-g extremity SAR

TEST RESULT

This value is less than the low threshold limit. No SAR test is required.

8. MEASUREMENTS AND TESTS UNCERTAINTY

Unless otherwise stated the uncertainties for the tests and measurements are evaluated in according to IMQ Operational Instruction IO-LAB-001 and IO-LAB-004. and requirement of NIST Technical Note 1297 and NIS 81: 1994 "The Treatment of Uncertainty in EMC Measurements"

The expanded uncertainty was calculated for all measurements and tests listed in this test report according to CISPR 16-4-2 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4-2: Uncertainty in EMC Measurements", with UKAS document LAB 34 and is documented in the quality system accordance to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device

Internal Procedure PI-037 ensures that the requirements for traceability of calibrations, of all test equipment requiring calibration, and calibration intervals are met.

Methods/Standard	Parameter	Expanded Uncertainty	Unit	Confidence level	Coverage Factor	Degree of freedom
Continuous disturbance	QP detector 9 – 150 kHz	2,47	dB	95%	2,00	25
	QP detector 150 k – 30 MHz	2,61	dB	95%	2,00	26
	QP detector using Voltage Probe	2,45	dB	95%	2,00	26
	QP detector using ISN	3,15	dB	95%	2,00	> 60
	QP detector using Current Probe	2,15	dB	95%	2,00	35
Radiated disturbance	QP detector (30 MHz - 100 MHz) H polarization	4,33	dB	95%	2,00	> 60
	QP detector (30 MHz - 100 MHz) V polarization	4,22	dB	95%	2,00	> 60
	QP detector (100 MHz - 200 MHz) H polarization	3,40	dB	95%	2,00	> 60
	QP detector (100 MHz - 200 MHz) V polarization	4,76	dB	95%	2,00	> 60
	QP detector (200 MHz - 1000 MHz) H polarization	3,91	dB	95%	2,00	> 60
	QP detector (200 MHz - 1000 MHz) V polarization	3,82	dB	95%	2,00	> 60
	PK detector 1-6 GHz	4,77	dB	95%	2,00	> 60
	PK detector 6 – 18 GHz	5,14	dB	95%	2,00	> 60

9. LIST OF MEASURING EQUIPMENT AND CALIBRATION INFORMATION

IMQ Serial Number	Instrument	Manufacturer	Type	Last Cal.	Next Cal.	Calibration Company
P01709	Shielded semi-anechoic chamber	SIDT	/	03-15	03-17	IMQ
P02486	Turntable controller unit	FRANKONIA	FCTAM01	/	/	/
P02488	Mast antenna	FRANKONIA	FAM4	/	/	/
S05562	EMI Receiver	ROHDE & SCHWARZ	ESU 8	01-17	01-18	Rohde & Schwarz
S03631	LISN 1 PHASE	ROHDE & SCHWARZ	ENV216	03-16	03-17	I.N.R.I.M.
S02508	Loop Antenna	ROHDE & SCHWARZ	HFH2-Z2	01-15	01-17	SEIBERSDORF
S06463	Log antenna	ARA	VULB9160	04-16	04-19	SEIBERSDORF
S04272	Horn antenna	SCHWARZBECK	BBHA 9120D	07-14	07-17	NPL
S03668	Horn antenna	SCHWARZBECK	BBHA 9170	08-13	02-17	Liberty Labs
S03629	Spectrum Analyzer	Rohde & Schwarz	FSP40	04-16	04-17	Rohde & Schwarz
S03542	Preamplifier	Hewlett Packard	HP 8449B	04-16	04-18	IMQ
S06764	Preamplifier	SCHWARZBECK	BBV 9721	01-16	01-17	Rohde & Schwarz
W-00199/E	Software	ROHDE & SCHWARZ	EMC32 Ver. 6.30	/	/	/
H-00165	PC	/	/	/	/	/

END OF TEST REPORT