

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 ILAC-MRA  ACCREDITED
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

RF EXPOSURE EVALUATION

SPECIFIC ABSORPTION RATE

SAR TEST REPORT

FOR

INGRID, INC.

PORTABLE 2.4 GHz CORDLESS HANDSET (GRID CONTROLLER)

DEVICE IDENTIFIER(S)			
FCC ID:	S9PHSC1000	Model(s):	HSC1000
TEST STANDARD(S) & PROCEDURE(S) APPLIED			
FCC OET Bulletin 65, Supplement C (01-01)			
Industry Canada RSS-102 Issue 2			
IEEE 1528-2003			

Test Report Serial No.

051407S9P-T831-S15T

Test Report Revision No.

Revision 1.0 (Initial Release)

Test Lab and Location

**Celltech Compliance Testing & Engineering Lab
(Celltech Labs Inc.)
21-364 Lougheed Road
Kelowna, B.C. V1X 7R8
Canada**



Certificate No. 2470.01

Testing and Report By: Cheri Frangiadakis Celltech Labs Inc.	Test Report Reviewed By: Jonathan Hughes Celltech Labs Inc.
-----------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)			Tx Freq.:	2401.056 - 2482.272 MHz	
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 1 of 48

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

DECLARATION OF COMPLIANCE SAR RF EXPOSURE EVALUATION

<u>Test Lab and Location</u>	<u>Company Information</u>
CELLTECH LABS INC. Testing and Engineering Services 21-364 Lougheed Road Kelowna, B.C. V1X 7R8 Canada Tel.: 250-765-7650 Fax: 250-765-7645 e-mail: info@celltechlabs.com web site: www.celltechlabs.com	INGRID, INC. 1055 Westlakes Drive, Suite 300 Berwyn, PA 19312 United States
FCC IDENTIFIER: S9PHSC1000 Model Name/No.: HSC1000	
Standard(s) Applied: FCC 47 CFR §2.1093; Health Canada Safety Code 6 Procedure(s) Applied: FCC OET Bulletin 65, Supplement C (01-01) Industry Canada RSS-102 Issue 2 IEEE 1528-2003	
FCC Device Classification: Part 15 Spread Spectrum Transmitter (DSS) IC Device Classification: Low Power License-Exempt Radiocommunication Device (RSS-210)	
Device Description: 2.4 GHz Cordless Handset (Grid Controller) Transmit Frequency Range(s): 2401.056 - 2482.272 MHz (ISM Band) Mode(s) of Operation: TDMA/TDD Communication Protocol: DECT Modulation Type: GFSK Max. Duty Cycle Tested: 16 % (Source-Based Time-Averaged) Max. RF Output Power Tested: 101.2 dBuV/m - Field Strength (2442.528 MHz) Battery Type(s) Tested: Ni-MH 3.6 V, 800 mAh (Model: IG800) Antenna Type(s) Tested: Dual Internal Fixed Wire Element	
Body-worn Accessories Tested: Plastic Belt-Clip Audio Accessories Tested: Noise Canceling Headset (Plantronics M215)	
Max. SAR Level(s) Evaluated: Head: 0.148 W/kg (1g average) Body: 0.136 W/kg (1g average)	

Celltech Labs Inc. declares under its sole responsibility that this wireless portable device complies with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada's Safety Code 6. The device was tested in accordance with the measurement standards and procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01), Industry Canada RSS-102 Issue 2 and IEEE Standard 1528-2003 for the General Population / Uncontrolled Exposure environment. All measurements were performed in accordance with the SAR system manufacturer recommendations.

I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc.
 The results and statements contained in this report pertain only to the device(s) evaluated.

Test Report Approved By:

Sean Johnston
 Celltech Labs Inc.



Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)			Tx Freq.:	2401.056 - 2482.272 MHz	
2007 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 2 of 48

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

TABLE OF CONTENTS

1.0 INTRODUCTION	4
2.0 DESCRIPTION of DEVICE UNDER TEST (DUT)	4
3.0 SAR MEASUREMENT SYSTEM	5
4.0 MEASUREMENT SUMMARY	6
5.0 DETAILS OF SAR EVALUATION	7
DETAILS OF SAR EVALUATION (Cont.)	8
6.0 EVALUATION PROCEDURES	8
EVALUATION PROCEDURES (Cont.)	9
7.0 SYSTEM PERFORMANCE CHECK	10
8.0 SIMULATED EQUIVALENT TISSUES	11
9.0 SAR SAFETY LIMITS	11
10.0 ROBOT SYSTEM SPECIFICATIONS	12
11.0 PROBE SPECIFICATION (EX3DV4)	13
12.0 SAM PHANTOM V4.0C	13
13.0 DEVICE HOLDER	13
14.0 TEST EQUIPMENT LIST	14
15.0 MEASUREMENT UNCERTAINTIES	15
MEASUREMENT UNCERTAINTIES (Cont.)	16
16.0 REFERENCES	17
APPENDIX A - SAR MEASUREMENT DATA	18
APPENDIX B - SYSTEM PERFORMANCE CHECK DATA	31
APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS	34
APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS	37
APPENDIX E - SYSTEM VALIDATION	46
APPENDIX F - PROBE CALIBRATION	47
APPENDIX G - SAM PHANTOM CERTIFICATE OF CONFORMITY	48

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 3 of 48

	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

1.0 INTRODUCTION

This measurement report demonstrates that the INGRID, INC. Model: HSC1000 Portable 2.4 GHz Cordless Handset (Grid Controller) complies with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]) and Health Canada's Safety Code 6 (see reference [2]) for the General Population / Uncontrolled Exposure environment. The test procedures described in FCC OET Bulletin 65, Supplement C, Edition 01-01 (see reference [3]), IC RSS-102 Issue 2 (see reference [4]), and IEEE Standard 1528-2003 (see reference [5]) were employed. A description of the product, operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used, and the various provisions of the rules are included within this test report.

2.0 DESCRIPTION of DEVICE UNDER TEST (DUT)


Standard(s) Applied	FCC	47 CFR §2.1093					
	IC	Health Canada Safety Code 6					
Device Classification(s)	FCC	Part 15 Spread Spectrum Transmitter (DSS)		FCC §15(C)			
	IC	Low Power License-Exempt Radiocommunication Device		RSS-210			
Procedure(s) Applied	FCC OET Bulletin 65, Supplement C (01-01)						
	Industry Canada RSS-102 Issue 2						
	IEEE Standard 1528-2003						
Device Description	Portable 2.4 GHz Cordless Handset (Grid Controller)						
RF Exposure Category	General Population / Uncontrolled Environment						
FCC IDENTIFIER	S9PHSC1000						
Model Name / No.	HSC1000						
Test Sample Serial No.	9	Identical Prototype					
Mode(s) of Operation	TDMA / TDD						
Communication Protocol	DECT						
Modulation Type	GFSK						
Max. Duty Cycle Tested	16%	Source-Based Time-Averaged		Dual-Slot Diversity			
Transmit Frequency Range	2401.056 - 2482.272 MHz						
Max. RF Output Power Tested	99.1 dBuV/m		2401.0560 MHz	Field Strength			
	101.2 dBuV/m		2442.5280 MHz	Field Strength			
	100.6 dBuV/m		2482.2720 MHz	Field Strength			
Antenna Type(s) Tested	Dual Internal Fixed Wire Element						
Battery Type(s) Tested	Ni-MH	3.6 V	800 mAh	Model: IG800			
Body-worn Accessories Tested	Plastic Belt-Clip						
Audio Accessories Tested	Noise Canceling Headset (Plantronics M215)						

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)			Tx Freq.:	2401.056 - 2482.272 MHz	
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 4 of 48

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

3.0 SAR MEASUREMENT SYSTEM

Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and alternate planar phantoms for brain and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

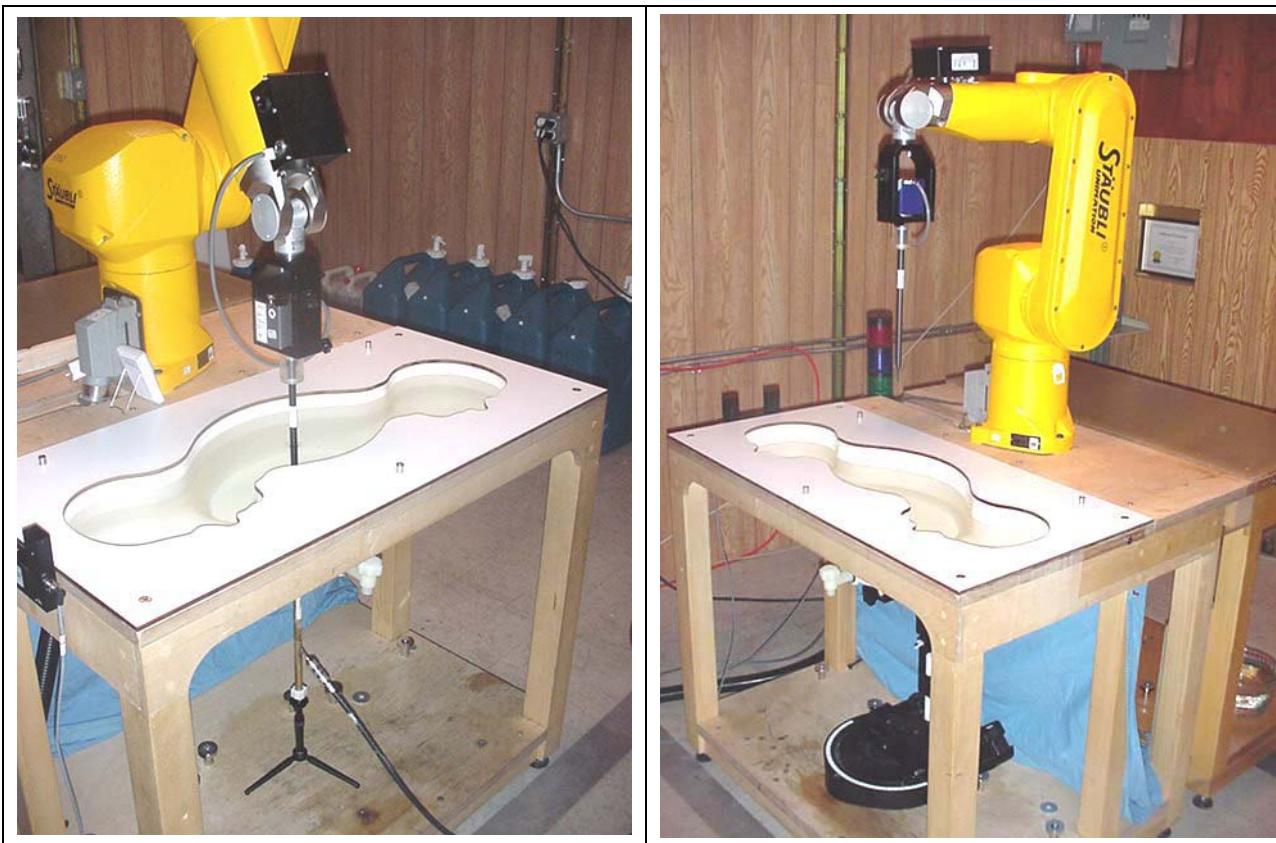

DASY4 Measurement System with SAM Phantom and Validation Dipole

DASY4 Measurement System with SAM Phantom and Device Holder

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
	Page 5 of 48					

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 ILAC-MRA  ACCREDITED
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

4.0 MEASUREMENT SUMMARY

HEAD SAR EVALUATION RESULTS

Freq.	Chan.	Test Mode	Duty Cycle	Battery Type	Antenna Position	Phantom Section	Test Position	DUT Start Power (F/S)	SAR Drift During Test	Measured SAR 1g
								%	dBuV/m	W/kg
2442.5280	48	TDMA/TDD	16	Ni-MH	Internal	Right Ear	Cheek/Touch	101.2	0.217	0.148
2442.5280	48	TDMA/TDD	16	Ni-MH	Internal	Right Ear	Ear/Tilt (15°)	101.2	-0.183	0.0423
2442.5280	48	TDMA/TDD	16	Ni-MH	Internal	Left Ear	Cheek/Touch	101.2	0.157	0.122
2442.5280	48	TDMA/TDD	16	Ni-MH	Internal	Left Ear	Ear/Tilt (15°)	101.2	0.131	0.0733
2401.0560	0	TDMA/TDD	16	Ni-MH	Internal	Right Ear	Cheek/Touch	99.1	-0.106	0.129
2482.2720	94	TDMA/TDD	16	Ni-MH	Internal	Right Ear	Cheek/Touch	100.6	-0.157	0.145

BODY SAR EVALUATION RESULTS

Freq.	Chan.	Test Mode	Duty Cycle		Battery Type	Phantom Section	DUT Position to Planar Phantom	Accessory Type(s)			DUT Start Power (F/S)	SAR Drift During Test	Measured SAR 1g
			%	Body-worn				dBuV/m	dB	W/kg			
2401.0560	0	TDMA/TDD	16	Ni-MH	Planar	Back Side	Belt-Clip	0.6 cm	Headset	99.1	0.00133	0.136	
2442.5280	48	TDMA/TDD	16	Ni-MH	Planar	Back Side	Belt-Clip	0.6 cm	Headset	101.2	-0.0808	0.0793	
2482.2720	94	TDMA/TDD	16	Ni-MH	Planar	Back Side	Belt-Clip	0.6 cm	Headset	100.6	-0.0364	0.0769	

Notes	1. The measurement results were obtained with the DUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.
	2. If the SAR measurements performed at the mid channel were ≥ 3 dB below the SAR limit; SAR evaluation for the low and high channels was optional (per FCC OET Bulletin 65, Supplement C, Edition 01-01 - see reference [3]).

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)			Tx Freq.:	2401.056 - 2482.272 MHz	
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 6 of 48

 Celltech Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 IAC-MRA  ACCREDITED
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Certificate No. 2470.01

5.0 DETAILS OF SAR EVALUATION

The INGRID, INC. Model: HSC1000 Portable 2.4 GHz Cordless Handset (Grid Controller) was compliant for localized Specific Absorption Rate (Uncontrolled Exposure) based on the test provisions and conditions described below. The detailed test setup photographs are shown in Appendix D.

Ear-held Configuration

- 1) The DUT was tested in an ear-held configuration on both the left and right sections of the SAM phantom at the mid channel of the operating band. If the SAR level at the mid channel of the frequency band for each test configuration (left ear, right ear, cheek/touch, ear/tilt) was ≥ 3 dB below the SAR limit, measurements at the low and high channels were optional (per FCC OET Bulletin 65, Supplement C, Edition 01-01 - see reference [3]).
- a) The handset was placed in the device holder in a normal operating position with the test device reference point located along the vertical centerline on the front of the device aligned to the ear reference point, with the center of the earpiece touching the center of the ear spacer of the SAM phantom.
- b) With the handset positioned parallel to the cheek, the test device reference point was aligned to the ear reference point on the head phantom, and the vertical centerline was aligned to the phantom reference plane (initial ear position).
- c) While maintaining the three alignments, the body of the handset was gradually adjusted to each of the following test positions:
 - Cheek/Touch Position: the handset was brought toward the mouth of the head phantom by pivoting against the ear reference point until any point of the mouthpiece or keypad touched the phantom.

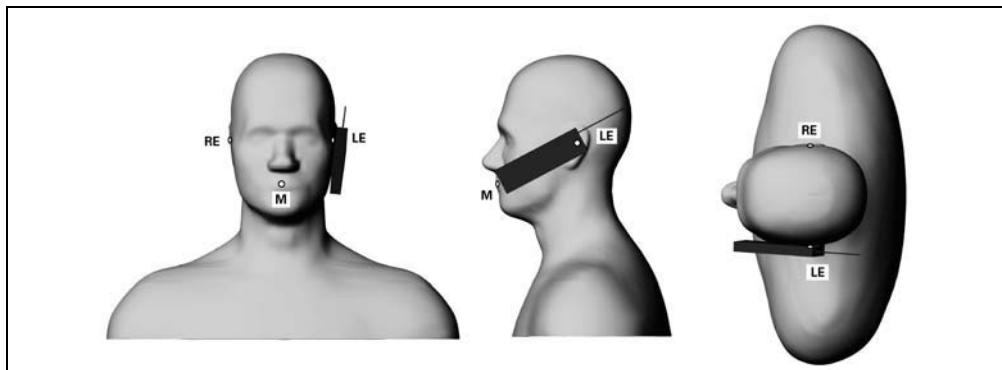


Figure 1. Position 1, "cheek" or "touch" position. The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for device positioning, are indicated (Shoulders are shown for illustration only).

- Ear/Tilt Position: With the phone aligned in the Cheek/Touch position, the handset was tilted away from the mouth with respect to the test device reference point by 15 degrees.

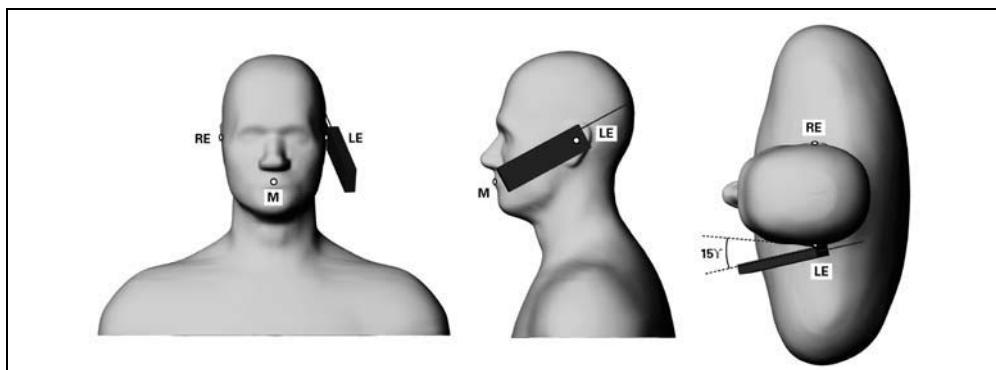


Figure 2. Phone position 2, "tilted position." The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning, are indicated (Shoulders are shown for illustration only).

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)			Tx Freq.:	2401.056 - 2482.272 MHz	
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 7 of 48

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

DETAILS OF SAR EVALUATION (Cont.)

Body-worn Configuration

- 2) The DUT was tested in a body-worn configuration with the back of the device placed parallel to the outer surface of the SAM phantom (planar section). The attached plastic belt-clip accessory was touching the outer surface of the SAM phantom (planar section) and provided a 0.6 cm spacing from the back of the handset to the SAM phantom (planar section).
- 3) A headset audio accessory was supplied by the customer and connected to the audio jack of the DUT.

Test Mode(s) & Power Setting(s)

- 4) The DUT was placed into test mode using DOS commands provided by the customer. The DUT was communicating with the base unit (FP) for the duration of the tests at maximum power in TDMA/TDD modulation at the maximum source-based time-averaged duty cycle (16%) in 2 time slots (dual-slot diversity) with a crest factor of 1:6.25.
- 5) The conducted power level(s) of the DUT could not be measured for the SAR evaluation due to internal antenna. The DUT was evaluated for SAR at the maximum conducted power level preset by the manufacturer. The RF output power reference levels reported (field strength levels) were measured by Nemko Canada on the same unit.
- 6) The power drift of the DUT measured by the DASY4 system during the SAR evaluations was < 5%.
- 7) The DUT battery was fully charged prior to the SAR evaluations.

Ambient Conditions

- 8) The fluid temperature was measured prior to and after the SAR evaluations to ensure the temperature remained within +/-2°C of the fluid temperature reported during the dielectric parameter measurements.
- 9) The dielectric parameters of the simulated tissue mixtures were measured prior to the SAR evaluations using an ALS-PR-DIEL Dielectric Probe Kit and an HP 8753ET Network Analyzer (see Appendix C).
- 10) The SAR evaluations were performed within 24 hours of the system performance check.

6.0 EVALUATION PROCEDURES

- a. (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
 (ii) For body-worn and face-held devices a planar phantom was used.
- b. The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.
 An area scan was determined as follows:
 - c. Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
 - d. A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.
 A 1g and 10g spatial peak SAR was determined as follows:
- e. Extrapolation is used to determine the values between the dipole center of the probe and the surface of the phantom. This data cannot be measured because the center of the dipole sensors is 1.0 mm away from the probe tip and the distance between the probe and the boundary must be larger than 25% of the probe diameter. The probe diameter is 2.4 mm. In the DASY4 software, the distance between the sensor center and phantom surface is set to 2.0 mm. This provides a distance of 1.0 mm between the probe tip and the surface. The extrapolation of the values between the dipole center and the surface of the phantom was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- f. Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- g. A zoom scan volume of 32 mm x 32 mm x 30 mm (5x5x7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7x7x7 points) to ensure complete capture of the peak spatial-average SAR.

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 8 of 48

 Celltech Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 IAC-MRA ACCREDITED
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

EVALUATION PROCEDURES (Cont.)

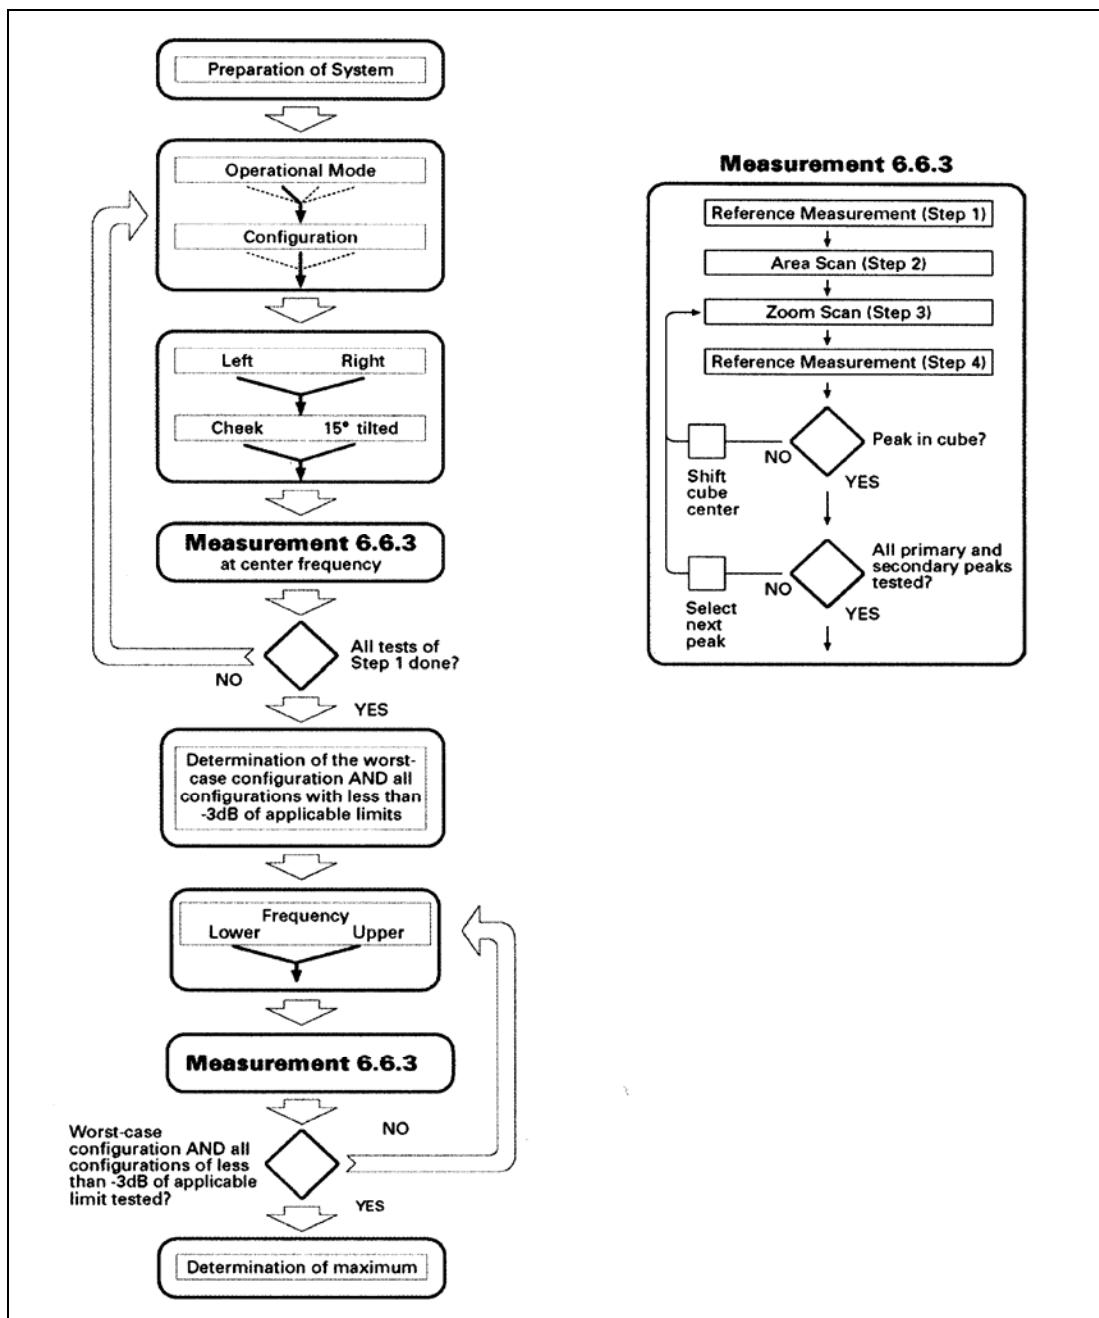


Figure 3. Flow Chart for determining the largest peak spatial-average SAR from all device configurations per IEEE Standard 1528-2003 (see reference [5]).

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 9 of 48

7.0 SYSTEM PERFORMANCE CHECK

Prior to the SAR evaluations a system check was performed at the planar section of the SAM phantom with a 2450MHz dipole (see Appendix E for system validation procedures). The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using an ALS-PR-DIEL Dielectric Probe Kit and an HP 8753ET Network Analyzer (see Appendix C for measured fluid dielectric parameters). A forward power of 250 mW was applied to the dipole and the system was verified to a tolerance of $\pm 10\%$ (see Appendix B for system performance check test plot). See Table 1 below for the SAR system manufacturer's reference body SAR values from the DASY4 Manual (see reference [7]).

SYSTEM PERFORMANCE CHECK EVALUATION

Test Date	Equiv. Tissue	SAR 1g (W/kg)			Dielectric Constant ϵ_r			Conductivity σ (mho/m)			ρ (Kg/m ³)	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
		Freq. (MHz)	SPEAG Target	Meas.	Dev.	IEEE Target	Meas.	Dev.	IEEE Target	Meas.	Dev.					
Jun 21	Body 2450	12.8 $\pm 10\%$	13.7	+7.1%	52.7 $\pm 5\%$	50.1	-4.9%	1.95 $\pm 5\%$	2.04	+4.7%	1000	25.5	24.0	≥ 15	30	101.1
Note(s)	1. The fluid temperature was measured prior to and after the system performance check to ensure the temperature remained within $\pm 2^\circ\text{C}$ of the fluid temperature reported during the dielectric parameter measurements.															
	2. The SAR evaluations were performed within 24 hours of the system performance check.															

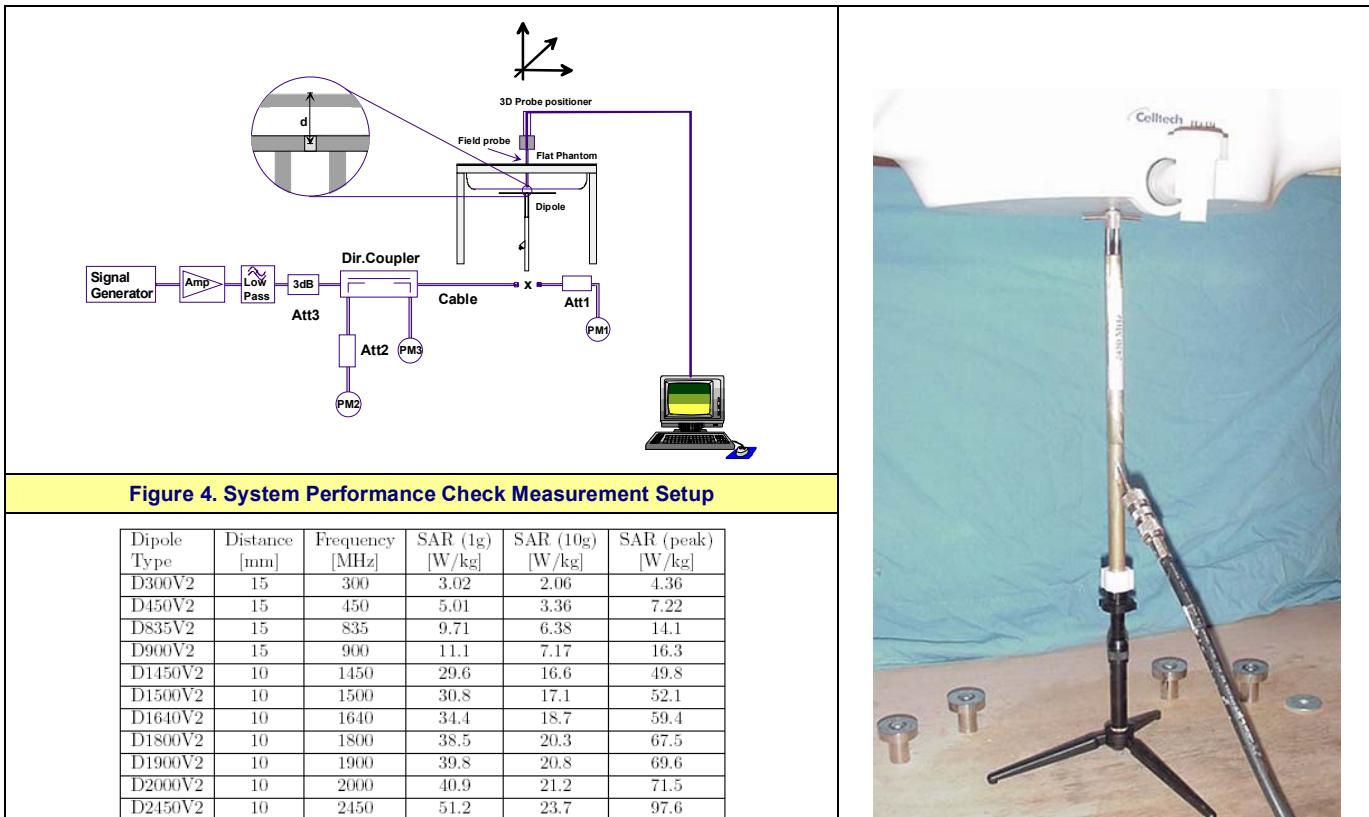


Table 32.1: Numerical reference SAR values for SPEAG dipoles and flat phantom filled with body-tissue simulating liquid. Note: All SAR values normalized to 1 W forward power.

Table 1. SAR System Manufacturer's Reference Body SAR Values

2450 MHz Validation Dipole Setup

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)			Tx Freq.:	2401.056 - 2482.272 MHz	
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 10 of 48

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 ILAC-MRA  ACCREDITED
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

8.0 SIMULATED EQUIVALENT TISSUES

The 2450MHz simulated tissue mixtures consisted of Glycol-monobutyl, water, and salt. The fluid was prepared according to standardized procedures and measured for dielectric parameters (permittivity and conductivity).

SIMULATED TISSUE MIXTURES		
INGREDIENT	2450 MHz Brain	2450 MHz Body
Water	52.00 %	69.98 %
Glycol Monobutyl	48.00 %	30.00 %
Salt	-	0.02 %

9.0 SAR SAFETY LIMITS

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0
The Spatial Average value of the SAR averaged over the whole body.		
The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.		
The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.		
Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.		
Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.		

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 11 of 48

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

10.0 ROBOT SYSTEM SPECIFICATIONS

<u>Specifications</u>	
Positioner	Stäubli Unimation Corp. Robot Model: RX60L
Repeatability	0.02 mm
No. of axis	6
<u>Data Acquisition Electronic (DAE) System</u>	
<u>Cell Controller</u>	
Processor	AMD Athlon XP 2400+
Clock Speed	2.0 GHz
Operating System	Windows XP Professional
<u>Data Converter</u>	
Features	Signal Amplifier, multiplexer, A/D converter, and control logic
Software	Measurement Software: DASY4, V4.7 Build 44
	Postprocessing Software: SEMCAD, V1.8 Build 171
Connecting Lines	Optical downlink for data and status info.; Optical uplink for commands and clock
<u>DASY4 Measurement Server</u>	
Function	Real-time data evaluation for field measurements and surface detection
Hardware	PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
Connections	COM1, COM2, DAE, Robot, Ethernet, Service Interface
<u>E-Field Probe</u>	
Model	EX3DV4
Serial No.	3600
Construction	Symmetrical design with triangular core
Frequency	10 MHz to 6 GHz
Linearity	± 0.2 dB (30 MHz to 3 GHz)
<u>Phantom(s)</u>	
Type	SAM V4.0C
Shell Material	Fiberglass
Thickness	2.0 ± 0.1 mm
Volume	Approx. 25 liters

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)			Tx Freq.:	2401.056 - 2482.272 MHz	
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 12 of 48

 Celltech Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	


11.0 PROBE SPECIFICATION (EX3DV4)

Construction:	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g. DGBE)	
Calibration:	Basic Broadband Calibration in air: 10-3000 MHz	
Frequency:	Conversion Factors (CF) for HSL 900 and HSL 1750	
Directivity:	10 MHz to >6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz) ± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range:	10 μ W/g to >100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions:	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm)	
Application:	Typical distance from probe tip to dipole centers: 1.0 mm High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better than 30%.	

EX3DV4 E-Field Probe

12.0 SAM PHANTOM V4.0C

The SAM phantom V4.0C is a fiberglass shell phantom with a 2.0 mm (+/-0.2 mm) shell thickness for left and right head and flat planar area integrated in a wooden table. The shape of the fiberglass shell corresponds to the phantom defined by SCC34-SC2. The device holder positions are adjusted to the standard measurement positions in the three sections (see Appendix G for specifications of the SAM phantom V4.0C).



SAM Phantom V4.0C

13.0 DEVICE HOLDER

The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.



Device Holder

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 13 of 48

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

14.0 TEST EQUIPMENT LIST

TEST EQUIPMENT		ASSET NO.	SERIAL NO.	DATE CALIBRATED	CALIBRATION DUE DATE
USED	DESCRIPTION				
x	Schmid & Partner DASY4 System	-	-	-	-
x	-DASY4 Measurement Server	00158	1078	N/A	N/A
x	-Robot	00046	599396-01	N/A	N/A
x	-DAE3	00018	370	13Mar07	13Mar08
	-ET3DV6 E-Field Probe	00016	1387	16Mar07	16Mar08
x	-EX3DV4 E-Field Probe	00213	3600	24Jan07	24Jan08
	-300 MHz Validation Dipole	00023	135	08Jun07	08Jun08
	-450 MHz Validation Dipole	00024	136	07Jun07	07Jun08
	-835 MHz Validation Dipole	00022	411	Brain Body	07Jun07 07Jun08
	-900 MHz Validation Dipole	00020	054	Brain Body	07Jun07 07Jun08
	-1800 MHz Validation Dipole	00021	247	Brain Body	06Jun07 06Jun08
	-1900 MHz Validation Dipole	00032	151	Brain Body	06Jun07 06Jun08
	-2450 MHz Validation Dipole	00025	150	Brain Body	08Jun07 08Jun08
x	5GHz Validation Dipole	-5200 MHz -5500 MHz -5800 MHz	00126	Body Body Brain Body	18May07 22May07 09May07 10May07
x	-SAM Phantom V4.0C	00154	1033	N/A	N/A
	-Barski Planar Phantom	00155	03-01	N/A	N/A
	-Plexiglas Side Planar Phantom	00156	161	N/A	N/A
	-Plexiglas Validation Planar Phantom	00157	137	N/A	N/A
x	ALS-PR-DIEL Dielectric Probe Kit	00160	260-00953	N/A	N/A
x	Gigatronics 8652A Power Meter	00007	1835272	26Mar07	26Mar08
	Gigatronics 8652A Power Meter	00008	1835267	22Jan07	22Jan08
	Gigatronics 80701A Power Sensor	00012	1834350	22Jan07	22Jan08
x	Gigatronics 80701A Power Sensor	00014	1833699	22Jan07	22Jan08
x	Gigatronics 80701A Power Sensor	00109	1834366	26Mar07	26Mar08
x	HP 8753ET Network Analyzer	00134	US39170292	20Apr07	20Apr08
x	HP 8648D Signal Generator	00005	3847A00611	NCR	NCR
	Rohde & Schwarz SMR20 Signal Generator	00006	100104	NCR	NCR
x	Amplifier Research 5S1G4 Power Amplifier	00106	26235	NCR	NCR
	Amplifier Research 10W1000C Power Amplifier	00041	27887	NCR	NCR
	HP E4408B Spectrum Analyzer	00015	US39240170	05Feb07	05Feb08

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)			Tx Freq.:	2401.056 - 2482.272 MHz	
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 14 of 48

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 ilac-MRA  ACCREDITED
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

15.0 MEASUREMENT UNCERTAINTIES

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)			Tx Freq.:	2401.056 - 2482.272 MHz	
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 15 of 48	

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

MEASUREMENT UNCERTAINTIES (Cont.)

UNCERTAINTY BUDGET FOR SYSTEM VALIDATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	Uncertainty Value ±% (1g)	V_i or V_{eff}
Measurement System						
Probe calibration (2450 MHz)	5.9	Normal	1	1	5.9	∞
Axial isotropy of the probe	4.7	Rectangular	1.732050808	1	2.7	∞
Spherical isotropy of the probe	0	Rectangular	1.732050808	1	0.0	∞
Spatial resolution	0	Rectangular	1.732050808	1	0.0	∞
Boundary effects	1	Rectangular	1.732050808	1	0.6	∞
Probe linearity	4.7	Rectangular	1.732050808	1	2.7	∞
Detection limit	1	Rectangular	1.732050808	1	0.6	∞
Readout electronics	0.3	Normal	1	1	0.3	∞
Response time	0	Rectangular	1.732050808	1	0.0	∞
Integration time	0	Rectangular	1.732050808	1	0.0	∞
RF ambient conditions	3	Rectangular	1.732050808	1	1.7	∞
Mech. constraints of robot	0.4	Rectangular	1.732050808	1	0.2	∞
Probe positioning	2.9	Rectangular	1.732050808	1	1.7	∞
Extrapolation & integration	1	Rectangular	1.732050808	1	0.6	∞
Dipole						
Dipole Positioning	2	Normal	1.732050808	1	1.2	∞
Power & Power Drift	4.7	Normal	1.732050808	1	2.7	∞
Phantom and Setup						
Phantom uncertainty	4	Rectangular	1.732050808	1	2.3	∞
Liquid conductivity (target)	5	Rectangular	1.732050808	0.64	1.8	∞
Liquid conductivity (measured)	5	Normal	1	0.64	3.2	∞
Liquid permittivity (target)	5	Rectangular	1.732050808	0.6	1.7	∞
Liquid permittivity (measured)	5	Normal	1	0.6	3.0	∞
Combined Standard Uncertainty					9.81	
Expanded Uncertainty (k=2)					19.61	
Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5]).						

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 16 of 48

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

16.0 REFERENCES

- [1] Federal Communications Commission - "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093: 1999.
- [2] Health Canada - "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6:1999.
- [3] Federal Communications Commission - "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada - "Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)", Radio Standards Specification RSS-102 Issue 2: November 2005.
- [5] IEEE Standard 1528-2003 - "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [6] ANSI/IEEE C95.1-2005 - "American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3 kHz to 300 GHz", New York: IEEE, April 2006.
- [7] Schmid & Partner Engineering AG - "DASY4 Manual", V4.5: March 2005.

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)			Tx Freq.:	2401.056 - 2482.272 MHz	
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 17 of 48

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



Certificate No. 2470.01

APPENDIX A - SAR MEASUREMENT DATA

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 18 of 48

 Celltech Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Date Tested: 06/22/2007

Head SAR - Right Ear - Cheek/Touch Position - 2442.5280 MHz - Channel 48

DUT: InGrid Model: HSC1000; Type: Portable 2.4 GHz Cordless Handset; Serial: 9

Ambient Temp: 24.3°C; Fluid Temp: 23.8°C; Barometric Pressure: 101.1 kPa; Humidity: 31%

Communication System: TDMA/TDD

Frequency: 2442.5280 MHz; Duty Cycle: 1:6.25

RF Output Power: 101.2 dB_uV/m (Field Strength)

3.6V, 800 mAh Ni-MH Battery Pack (Model: IG800)

Medium: HSL2450 Medium parameters used: $f = 2442.53$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 37.3$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3600; ConvF(6.37, 6.37, 6.37); Calibrated: 24/01/2007
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 13/03/2007
- Phantom: SAM 4.0; Type: Fiberglas; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Head SAR - Right Ear - Cheek/Touch Position - Mid Channel/Area Scan (10x15x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.108 mW/g

Head SAR - Right Ear - Cheek/Touch Position - Mid Channel/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.79 V/m; Power Drift = 0.217 dB

Peak SAR (extrapolated) = 0.291 W/kg

SAR(1 g) = 0.148 mW/g; SAR(10 g) = 0.071 mW/g


Maximum value of SAR (measured) = 0.170 mW/g

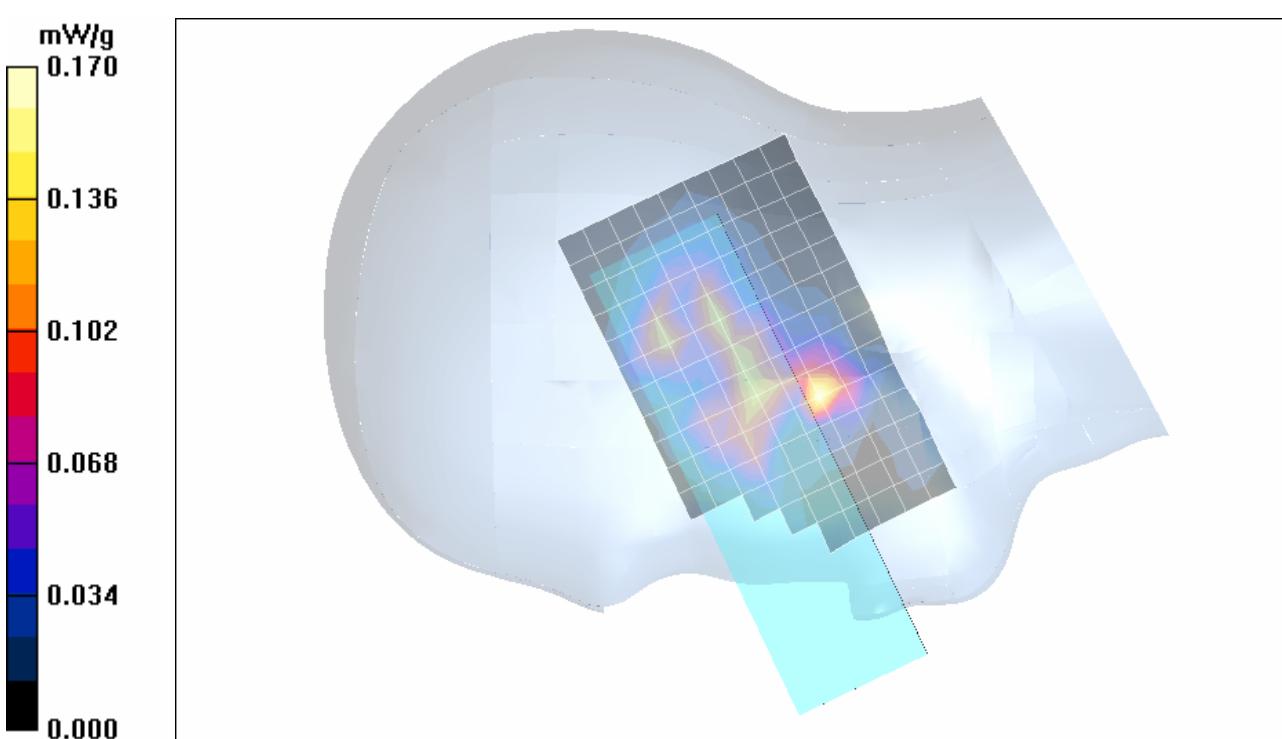

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 19 of 48

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Z-Axis Scan

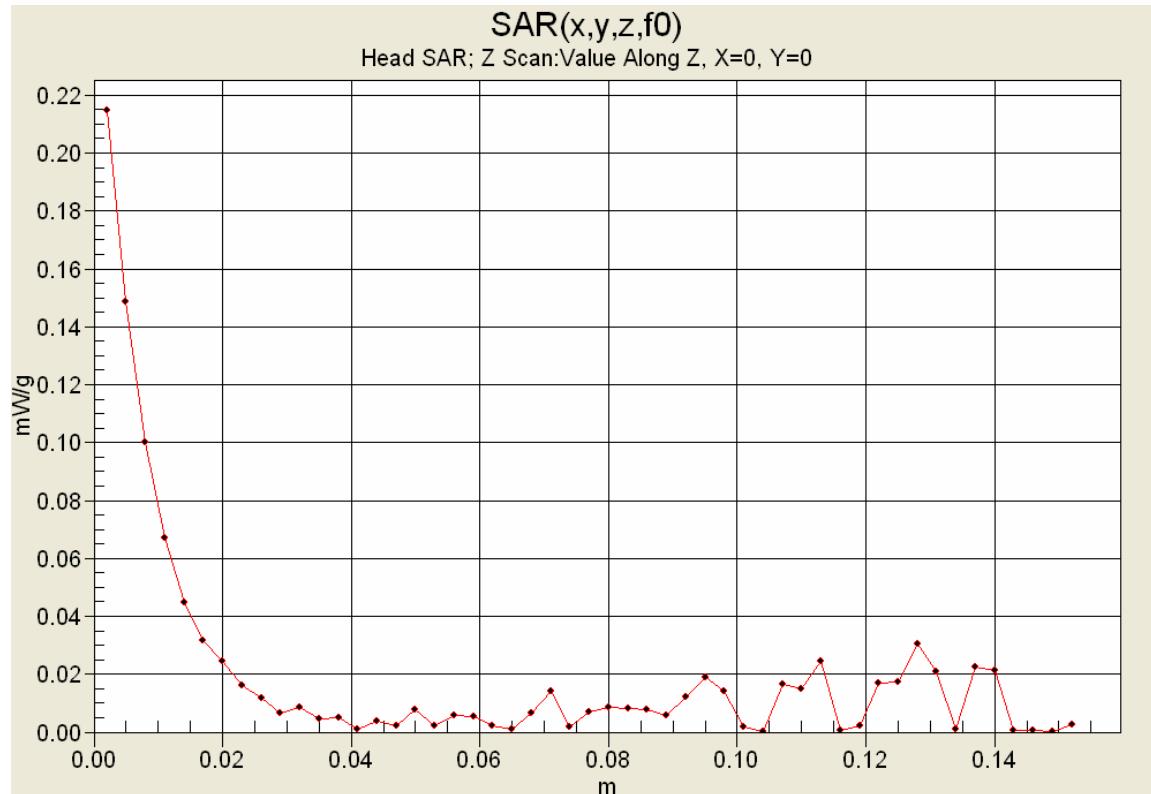

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 20 of 48

 Celltech Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Date Tested: 06/22/2007

Head SAR - Right Ear - Tilt Position (15°) - 2442.5280 MHz - Channel 48

DUT: InGrid Model: HSC1000; Type: Portable 2.4 GHz Cordless Handset; Serial: 9

Ambient Temp: 24.3°C; Fluid Temp: 23.8°C; Barometric Pressure: 101.1 kPa; Humidity: 31%

Communication System: TDMA/TDD

Frequency: 2442.5280 MHz; Duty Cycle: 1:6.25

RF Output Power: 101.2 dBuV/m (Field Strength)

3.6V, 800 mAh Ni-MH Battery Pack (Model: IG800)

Medium: HSL2450 Medium parameters used: $f = 2442.53$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 37.3$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3600; ConvF(6.37, 6.37, 6.37); Calibrated: 24/01/2007
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 13/03/2007
- Phantom: SAM 4.0; Type: Fiberglas; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Head SAR - Right Ear - Tilt Position (15°) - Mid Channel/Area Scan (10x15x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.053 mW/g

Head SAR - Right Ear - Tilt Position (15°) - Mid Channel/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.49 V/m; Power Drift = -0.183 dB

Peak SAR (extrapolated) = 0.096 W/kg

SAR(1 g) = 0.0423 mW/g; SAR(10 g) = 0.021 mW/g

Maximum value of SAR (measured) = 0.047 mW/g

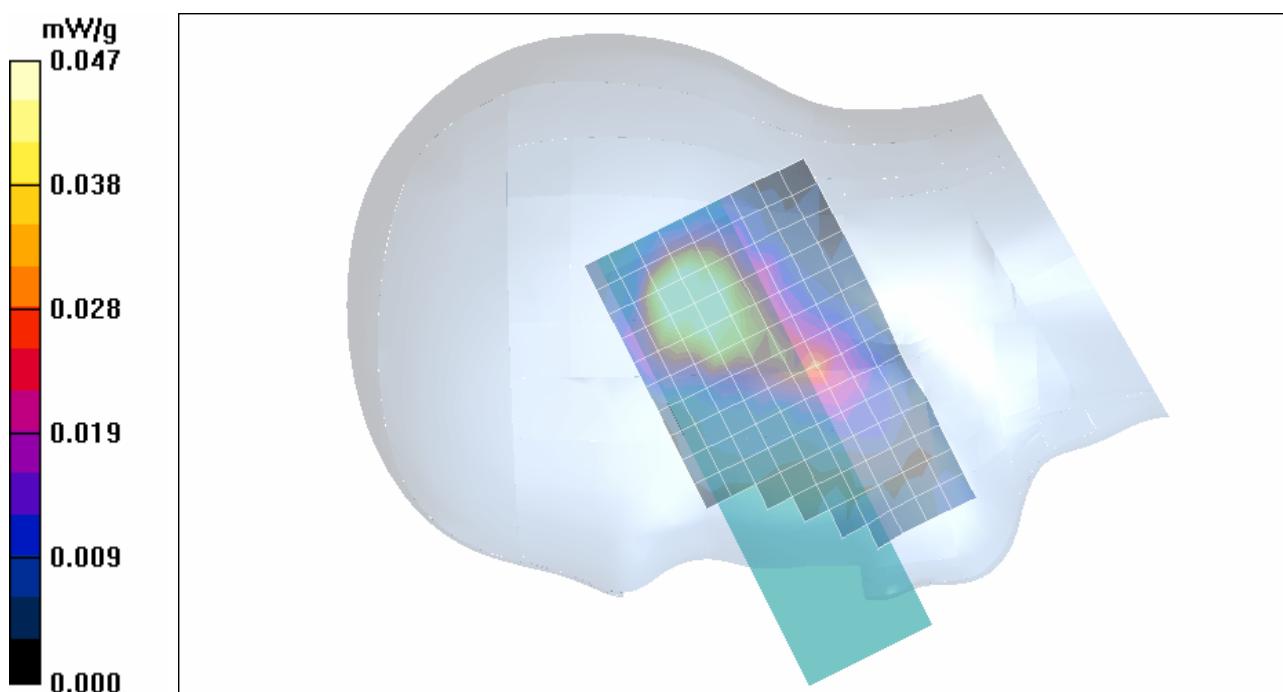

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 21 of 48

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Date Tested: 06/22/2007

Head SAR - Left Ear - Cheek/Touch Position - 2442.5280 MHz - Channel 48

DUT: InGrid Model: HSC1000; Type: Portable 2.4 GHz Cordless Handset; Serial: 9

Ambient Temp: 24.3°C; Fluid Temp: 23.8°C; Barometric Pressure: 101.1 kPa; Humidity: 31%

Communication System: TDMA/TDD

Frequency: 2442.5280 MHz; Duty Cycle: 1:6.25

RF Output Power: 101.2 dBuV/m (Field Strength)

3.6V, 800 mAh Ni-MH Battery Pack (Model: IG800)

Medium: HSL2450 Medium parameters used: $f = 2442.53$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 37.3$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3600; ConvF(6.37, 6.37, 6.37); Calibrated: 24/01/2007
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 13/03/2007
- Phantom: SAM 4.0; Type: Fiberglas; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Head SAR - Left Ear - Cheek/Touch Position - Mid Channel/Area Scan (10x15x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.086 mW/g

Head SAR - Left Ear - Cheek/Touch Position - Mid Channel/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.82 V/m; Power Drift = 0.157 dB

Peak SAR (extrapolated) = 0.382 W/kg

SAR(1 g) = 0.122 mW/g; SAR(10 g) = 0.058 mW/g

Maximum value of SAR (measured) = 0.174 mW/g

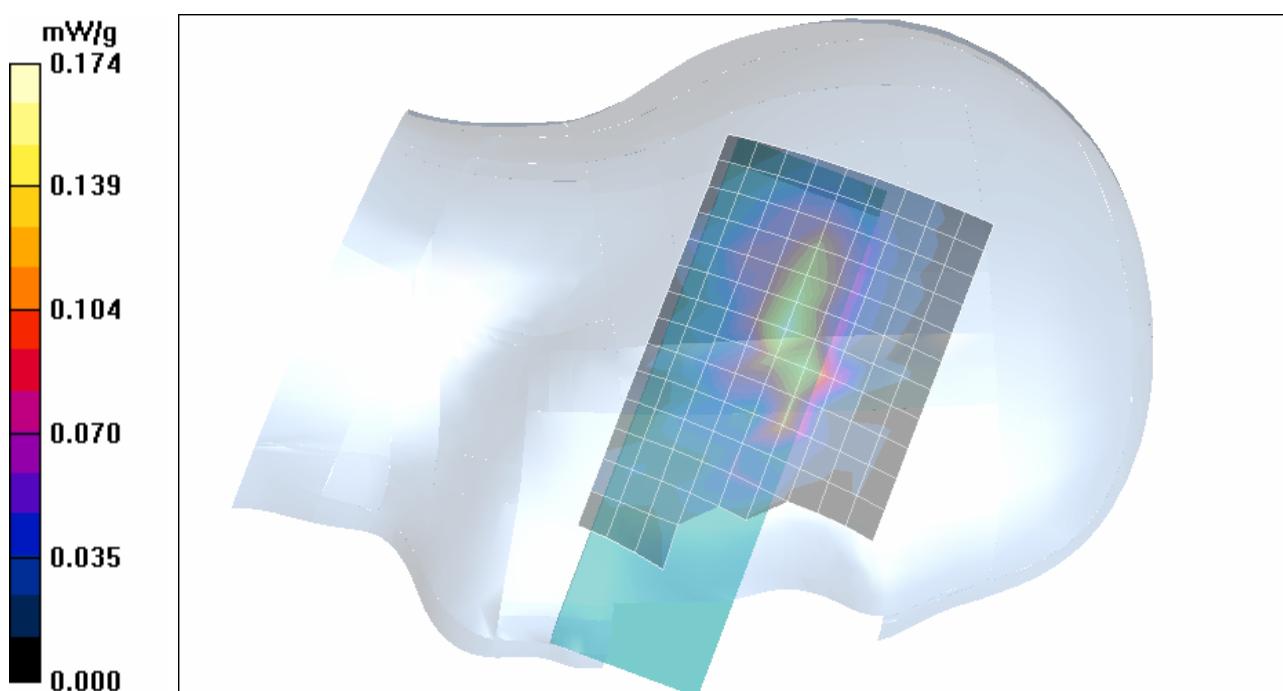

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 22 of 48

 Celltech Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Date Tested: 06/22/2007

Head SAR - Left Ear - Tilt Position (15°) - 2442.5280 MHz - Channel 48

DUT: InGrid Model: HSC1000; Type: Portable 2.4 GHz Cordless Handset; Serial: 9

Ambient Temp: 24.3°C; Fluid Temp: 23.8°C; Barometric Pressure: 101.1 kPa; Humidity: 31%

Communication System: TDMA/TDD

Frequency: 2442.5280 MHz; Duty Cycle: 1:6.25

RF Output Power: 101.2 dB_uV/m (Field Strength)

3.6V, 800 mAh Ni-MH Battery Pack (Model: IG800)

Medium: HSL2450 Medium parameters used: f = 2442.53 MHz; $\sigma = 1.89 \text{ mho/m}$; $\epsilon_r = 37.3$; $\rho = 1000 \text{ kg/m}^3$

- Probe: EX3DV4 - SN3600; ConvF(6.37, 6.37, 6.37); Calibrated: 24/01/2007
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 13/03/2007
- Phantom: SAM 4.0; Type: Fiberglas; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Head SAR - Left Ear - Tilt Position (15°) - Mid Channel/Area Scan (10x15x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.089 mW/g

Head SAR - Left Ear - Tilt Position (15°) - Mid Channel/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.18 V/m; Power Drift = 0.131 dB

Peak SAR (extrapolated) = 0.132 W/kg

SAR(1 g) = 0.0733 mW/g; SAR(10 g) = 0.040 mW/g

Maximum value of SAR (measured) = 0.078 mW/g

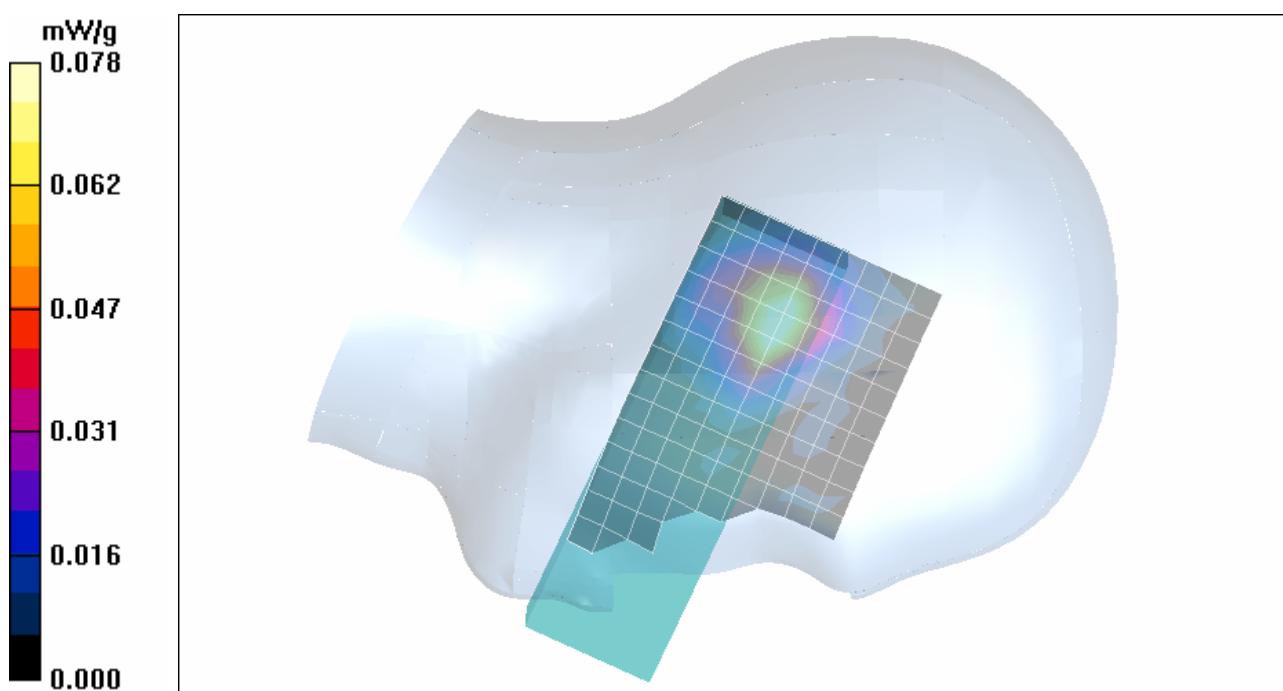

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 23 of 48

 Celltech Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Date Tested: 06/22/2007

Head SAR - Right Ear - Cheek/Touch Position - 2401.0560 MHz - Channel 0

DUT: InGrid Model: HSC1000; Type: Portable 2.4 GHz Cordless Handset; Serial: 9

Ambient Temp: 24.3°C; Fluid Temp: 23.8°C; Barometric Pressure: 101.1 kPa; Humidity: 31%

Communication System: TDMA/TDD

Frequency: 2401.0560 MHz; Duty Cycle: 1:6.25

RF Output Power: 99.1 dBuV/m (Field Strength)

3.6V, 800 mAh Ni-MH Battery Pack (Model: IG800)

Medium: HSL2450 Medium parameters used: $f = 2401.06$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 37.3$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3600; ConvF(6.37, 6.37, 6.37); Calibrated: 24/01/2007
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 13/03/2007
- Phantom: SAM 4.0; Type: Fiberglas; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Head SAR - Right Ear - Cheek/Touch Position - Low Channel/Area Scan (10x15x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.179 mW/g

Head SAR - Right Ear - Cheek/Touch Position - Low Channel/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.07 V/m; Power Drift = -0.106 dB

Peak SAR (extrapolated) = 0.270 W/kg

SAR(1 g) = 0.129 mW/g; SAR(10 g) = 0.060 mW/g

Maximum value of SAR (measured) = 0.156 mW/g

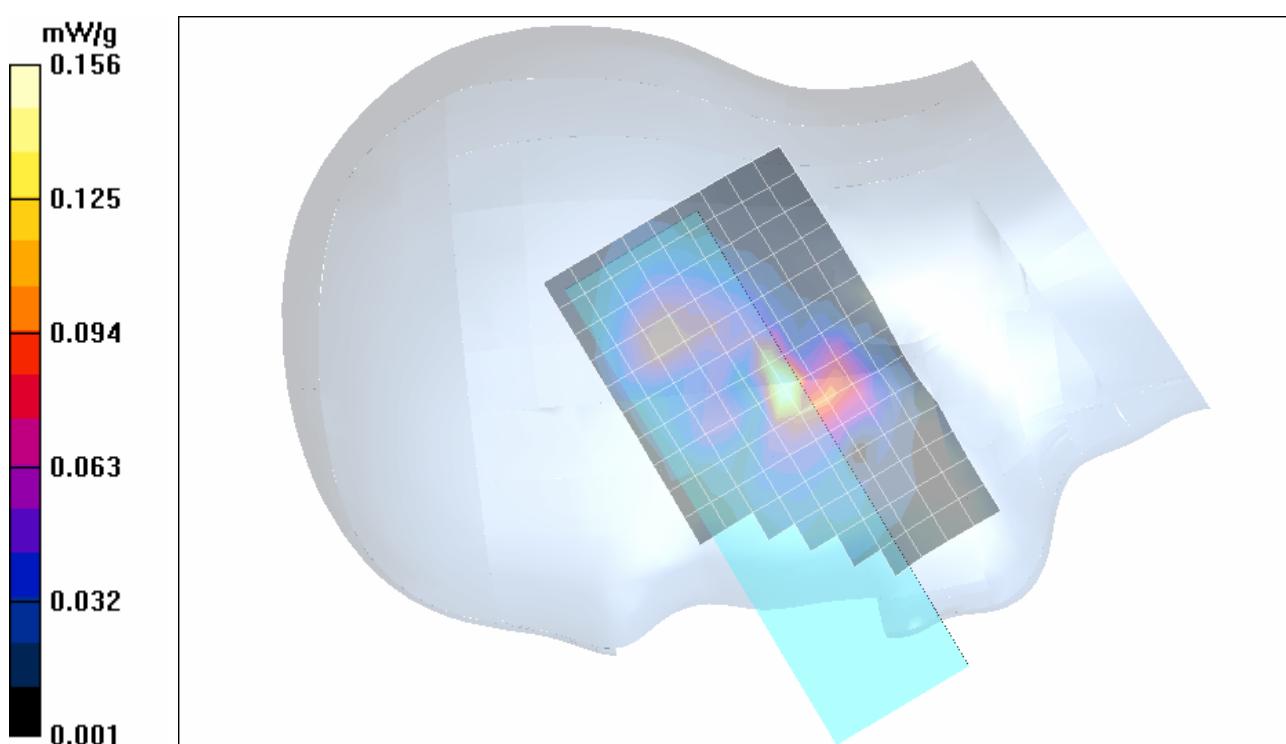

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 24 of 48

 Celltech Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Date Tested: 06/22/2007

Head SAR - Right Ear - Cheek/Touch Position - 2482.2720 MHz - Channel 94

DUT: InGrid Model: HSC1000; Type: Portable 2.4 GHz Cordless Handset; Serial: 9

Ambient Temp: 24.3°C; Fluid Temp: 23.8°C; Barometric Pressure: 101.1 kPa; Humidity: 31%

Communication System: TDMA/TDD

Frequency: 2482.2720 MHz; Duty Cycle: 1:6.25

RF Output Power: 100.6 dBuV/m (Field Strength)

3.6V, 800 mAh Ni-MH Battery Pack (Model: IG800)

Medium: HSL2450 Medium parameters used: $f = 2482.27$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 37.3$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3600; ConvF(6.37, 6.37, 6.37); Calibrated: 24/01/2007
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 13/03/2007
- Phantom: SAM 4.0; Type: Fiberglas; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Head SAR - Right Ear - Cheek/Touch Position - High Channel/Area Scan (10x15x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.164 mW/g

Head SAR - Right Ear - Cheek/Touch Position - High Channel/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.25 V/m; Power Drift = -0.157 dB

Peak SAR (extrapolated) = 0.322 W/kg

SAR(1 g) = 0.145 mW/g; SAR(10 g) = 0.056 mW/g

Maximum value of SAR (measured) = 0.139 mW/g

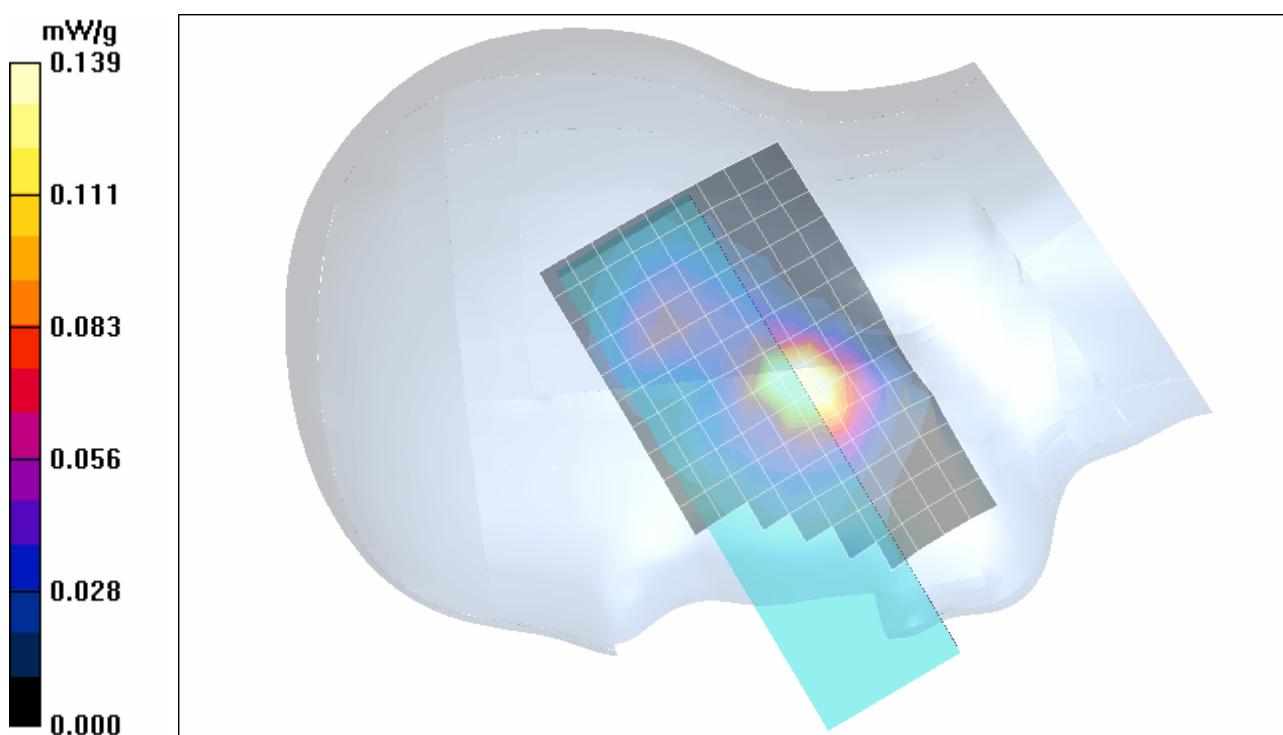

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 25 of 48

	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Date Tested: 06/21/2007

Body-Worn SAR - Back Side of DUT - 2401.0560 MHz - Channel 0

DUT: InGrid Model: HSC1000; Type: Portable 2.4 GHz Cordless Handset; Serial: 9

Body-Worn Accessory: Plastic Belt-Clip; Audio Accessory: Noise Canceling Headset

Ambient Temp: 23.9°C; Fluid Temp: 23.4°C; Barometric Pressure: 101.1 kPa; Humidity: 31%

Communication System: TDMA/TDD

Frequency: 2401.0560 MHz; Duty Cycle: 1:6.25

RF Output Power: 99.1 dBuV/m (Field Strength)

3.6V, 800 mAh Ni-MH Battery Pack (Model: IG800)

Medium: M2450 Medium parameters used: $f = 2401.06$ MHz; $\sigma = 2.04$ mho/m; $\epsilon_r = 50.1$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3600; ConvF(6.31, 6.31, 6.31); Calibrated: 24/01/2007
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE3_Sn370; Calibrated: 13/03/2007
- Phantom: SAM 4.0; Type: Fiberglas; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-Worn SAR - 0.6 cm Belt-Clip Spacing from Back of DUT to Planar Phantom - Low Channel

Area Scan (9x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.174 mW/g

Body-Worn SAR - 0.6 cm Belt-Clip Spacing from Back of DUT to Planar Phantom - Low Channel


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.32 V/m; Power Drift = 0.00133 dB

Peak SAR (extrapolated) = 0.241 W/kg

SAR(1 g) = 0.136 mW/g; SAR(10 g) = 0.075 mW/g


Maximum value of SAR (measured) = 0.148 mW/g

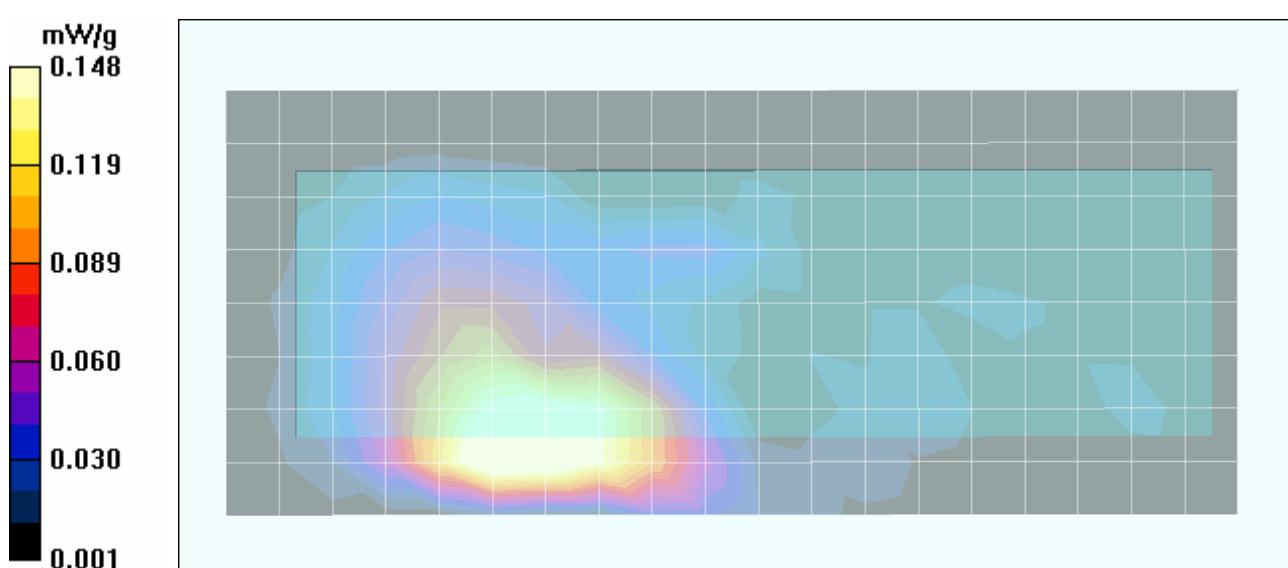

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 26 of 48	

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Z-Axis Scan

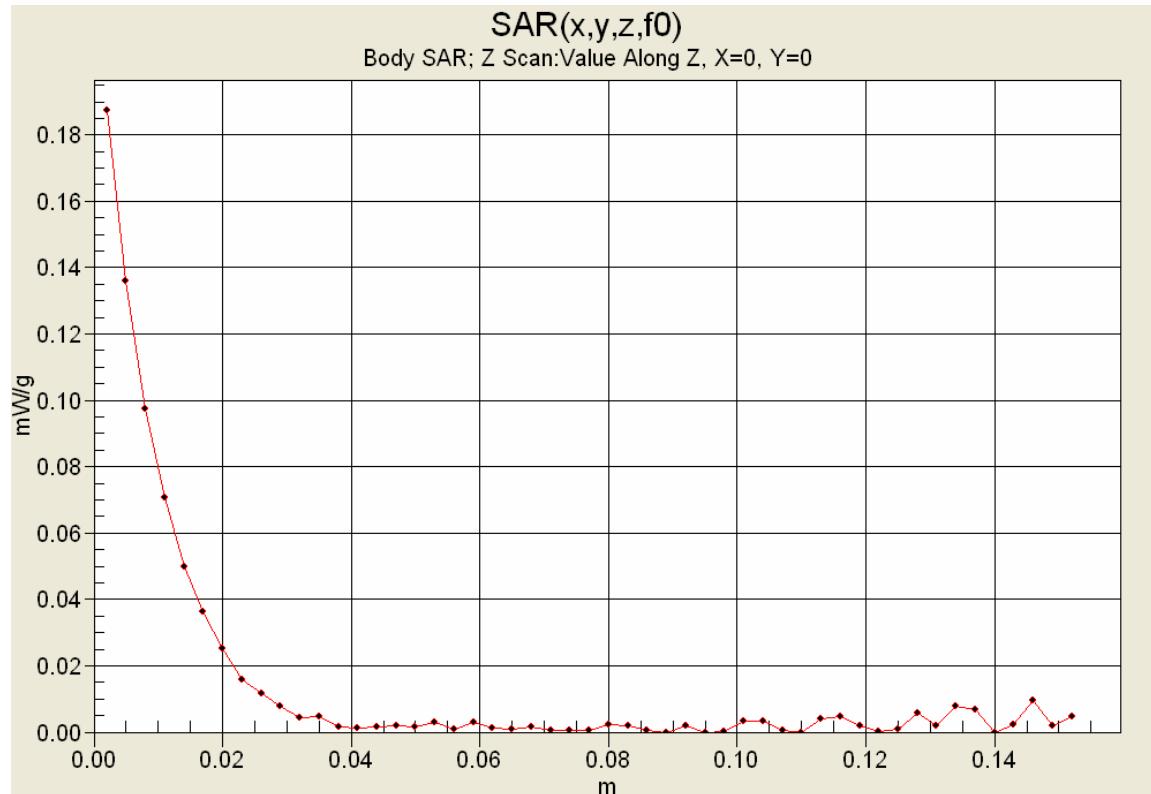

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 27 of 48

 Celltech Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Date Tested: 06/21/2007

Body-Worn SAR - Back Side of DUT - 2442.5280 MHz - Channel 48

DUT: InGrid Model: HSC1000; Type: Portable 2.4 GHz Cordless Handset; Serial: 9

Body-Worn Accessory: Plastic Belt-Clip; Audio Accessory: Noise Canceling Headset

Ambient Temp: 23.9°C; Fluid Temp: 23.4°C; Barometric Pressure: 101.1 kPa; Humidity: 31%

Communication System: TDMA/TDD

Frequency: 2442.5280 MHz; Duty Cycle: 1:6.25

RF Output Power: 101.2 dB_uV/m (Field Strength)

3.6V, 800 mAh Ni-MH Battery Pack (Model: IG800)

Medium: M2450 Medium parameters used: $f = 2442.53$ MHz; $\sigma = 2.04$ mho/m; $\epsilon_r = 50.1$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3600; ConvF(6.31, 6.31, 6.31); Calibrated: 24/01/2007
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 13/03/2007
- Phantom: SAM 4.0; Type: Fiberglas; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-Worn SAR - 0.6 cm Belt-Clip Spacing from Back of DUT to Planar Phantom - Mid Channel

Area Scan (9x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.120 mW/g

Body-Worn SAR - 0.6 cm Belt-Clip Spacing from Back of DUT to Planar Phantom - Mid Channel


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.52 V/m; Power Drift = -0.0808 dB

Peak SAR (extrapolated) = 0.146 W/kg

SAR(1 g) = 0.0793 mW/g; SAR(10 g) = 0.037 mW/g

Maximum value of SAR (measured) = 0.087 mW/g

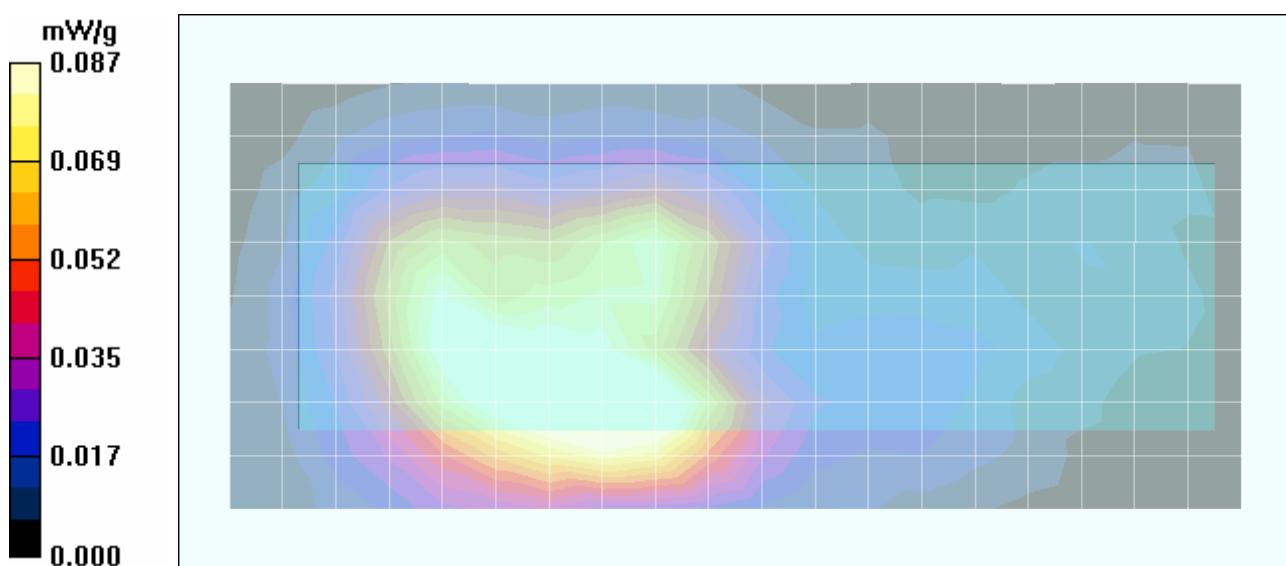

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 28 of 48	

	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Date Tested: 06/21/2007

Body-Worn SAR - Back Side of DUT - 2482.2720 MHz - Channel 94

DUT: InGrid Model: HSC1000; Type: Portable 2.4 GHz Cordless Handset; Serial: 9

Body-Worn Accessory: Plastic Belt-Clip; Audio Accessory: Noise Canceling Headset

Ambient Temp: 23.9°C; Fluid Temp: 23.4°C; Barometric Pressure: 101.1 kPa; Humidity: 31%

Communication System: TDMA/TDD

Frequency: 2482.2720 MHz; Duty Cycle: 1:6.25

RF Output Power: 100.6 dBuV/m (Field Strength)

3.6V, 800 mAh Ni-MH Battery Pack (Model: IG800)

Medium: M2450 Medium parameters used: $f = 2482.27$ MHz; $\sigma = 2.04$ mho/m; $\epsilon_r = 50.1$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3600; ConvF(6.31, 6.31, 6.31); Calibrated: 24/01/2007
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 13/03/2007
- Phantom: SAM 4.0; Type: Fiberglas; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-Worn SAR - 0.6 cm Belt-Clip Spacing from Back of DUT to Planar Phantom - High Channel

Area Scan (9x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.105 mW/g

Body-Worn SAR - 0.6 cm Belt-Clip Spacing from Back of DUT to Planar Phantom - High Channel


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.34 V/m; Power Drift = -0.0364 dB

Peak SAR (extrapolated) = 0.137 W/kg

SAR(1 g) = 0.0769 mW/g; SAR(10 g) = 0.041 mW/g

Maximum value of SAR (measured) = 0.081 mW/g

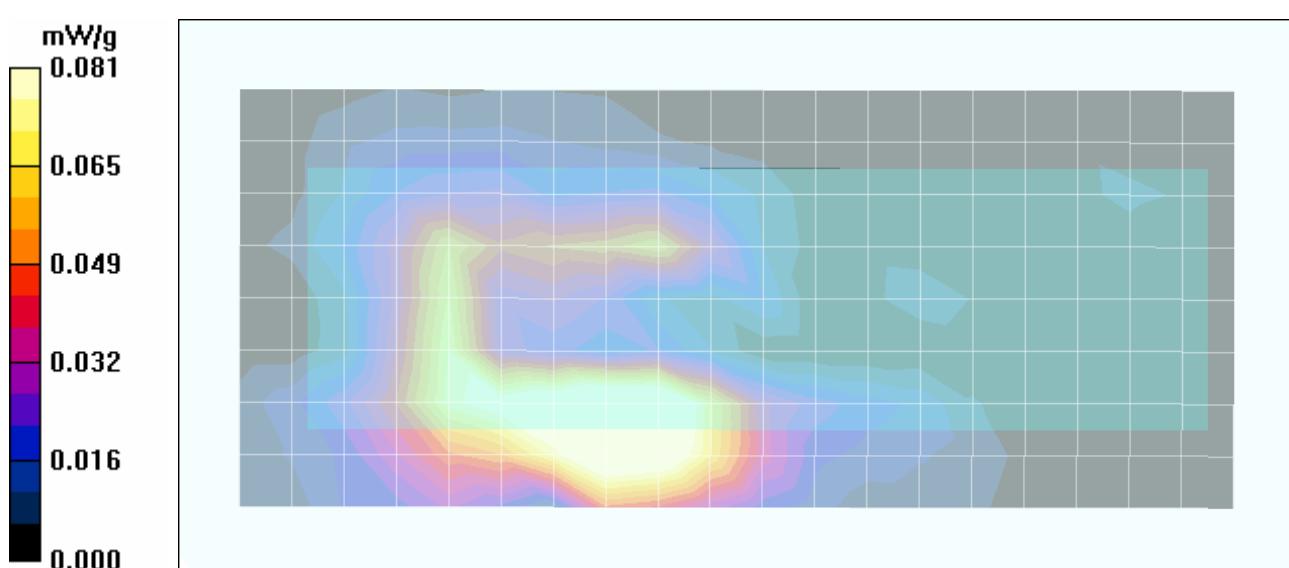

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 29 of 48	

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



Certificate No. 2470.01

Fluid Depth ($\geq 15\text{cm}$)



Head Section



Planar Section

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 30 of 48

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



Certificate No. 2470.01

APPENDIX B - SYSTEM PERFORMANCE CHECK DATA

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 31 of 48

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Date Tested: 06/21/2007

System Performance Check - 2450 MHz Dipole - MSL

DUT: 2450 MHz Validation Dipole; Asset: 00025; Serial: 150; Validation: 06/08/2007

Ambient Temp: 25.5°C; Fluid Temp: 24.0°C; Barometric Pressure: 101.1 kPa; Humidity: 30%

Communication System: CW

Forward Conducted Power: 250 mW

Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.04$ mho/m; $\epsilon_r = 50.1$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3600; ConvF(6.31, 6.31, 6.31); Calibrated: 24/01/2007
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 13/03/2007
- Phantom: SAM 4.0; Type: Fiberglas; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

2450 MHz Dipole - System Performance Check/Area Scan (6x10x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 12.9 mW/g

2450 MHz Dipole - System Performance Check/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.5 V/m; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 28.0 W/kg

SAR(1 g) = 13.7 mW/g; SAR(10 g) = 6.29 mW/g

Maximum value of SAR (measured) = 15.7 mW/g

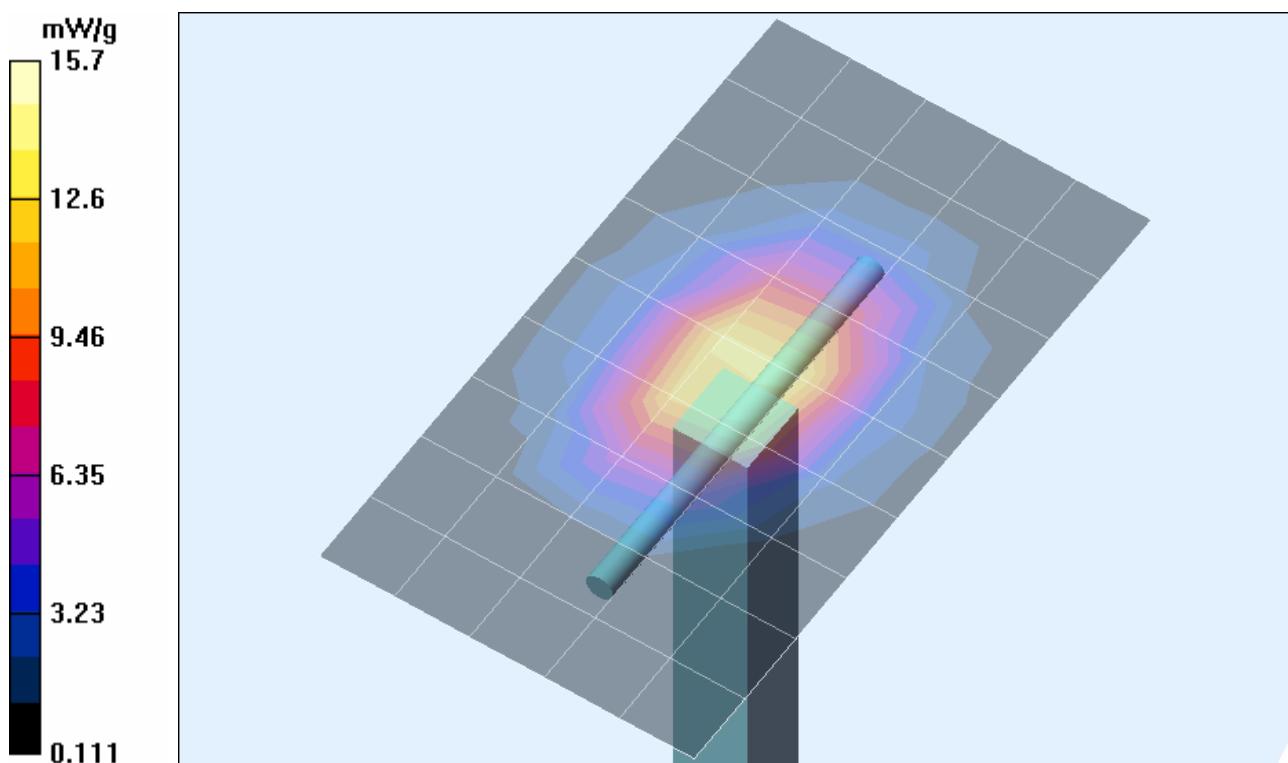


Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)			Tx Freq.:	2401.056 - 2482.272 MHz	
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 32 of 48

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



Certificate No. 2470.01

Z-Axis Scan

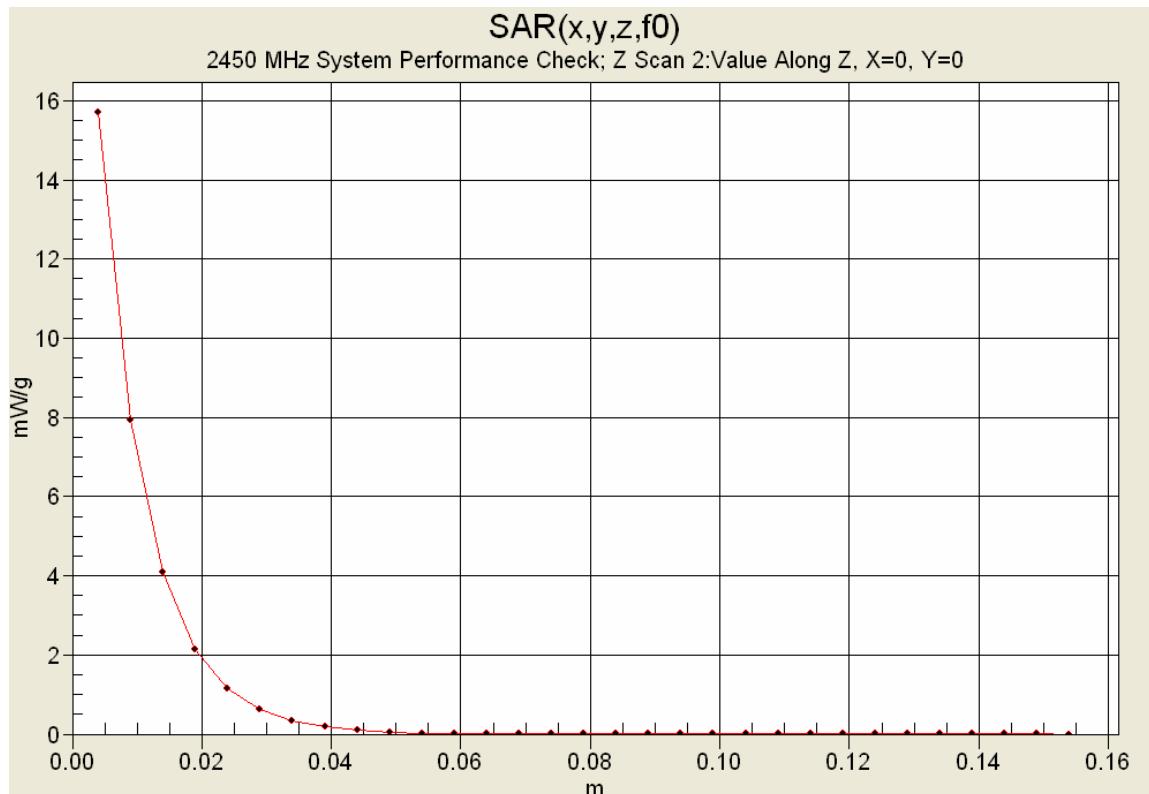

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 33 of 48

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



Certificate No. 2470.01

APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 34 of 48

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

2450 MHz System Performance Check & DUT Evaluation (Body)

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

Thu 21/Jun/2007

Frequency (GHz)

FCC_eH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon

FCC_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma

FCC_eB FCC Limits for Body Epsilon

FCC_sB FCC Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
2.3500	52.83	1.85	50.60	1.89
2.3600	52.82	1.86	50.58	1.91
2.3700	52.81	1.87	50.53	1.93
2.3800	52.79	1.88	50.38	1.93
2.3900	52.78	1.89	50.38	1.95
2.4000	52.77	1.90	50.35	1.97
2.4100	52.75	1.91	50.36	1.98
2.4200	52.74	1.92	50.31	2.00
2.4300	52.73	1.93	50.21	2.01
2.4400	52.71	1.94	50.15	2.04
2.4500	52.70	1.95	50.07	2.04
2.4600	52.69	1.96	50.08	2.04
2.4700	52.67	1.98	50.04	2.08
2.4800	52.66	1.99	50.01	2.09
2.4900	52.65	2.01	49.99	2.11
2.5000	52.64	2.02	49.96	2.12
2.5100	52.62	2.04	49.93	2.14
2.5200	52.61	2.05	49.83	2.16
2.5300	52.60	2.06	49.83	2.17
2.5400	52.59	2.08	49.77	2.19
2.5500	52.57	2.09	49.71	2.20

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.					Page 35 of 48	

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

2450 MHz DUT Evaluation (Brain)

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

Fri 22/Jun/2007

Frequency (GHz)

FCC_eH FCC OET 65 Supplement C (June 2001) Limits for Head Epsilon

FCC_sH FCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eH	FCC_sH	Test_e	Test_s
2.3500	39.38	1.71	37.90	1.78
2.3600	39.36	1.72	37.85	1.79
2.3700	39.34	1.73	37.82	1.80
2.3800	39.32	1.74	37.76	1.81
2.3900	39.31	1.75	37.65	1.82
2.4000	39.29	1.76	37.64	1.83
2.4100	39.27	1.76	37.35	1.84
2.4200	39.25	1.77	37.52	1.85
2.4300	39.24	1.78	37.46	1.86
2.4400	39.22	1.79	37.39	1.88
2.4500	39.20	1.80	37.30	1.89
2.4600	39.19	1.81	37.24	1.91
2.4700	39.17	1.82	37.14	1.91
2.4800	39.16	1.83	37.06	1.93
2.4900	39.15	1.84	36.93	1.94
2.5000	39.14	1.85	36.85	1.95
2.5100	39.12	1.87	36.83	1.96
2.5200	39.11	1.88	36.76	1.97
2.5300	39.10	1.89	36.74	1.99
2.5400	39.09	1.90	36.69	1.99
2.5500	39.07	1.91	36.66	2.00

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 36 of 48	

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



Certificate No. 2470.01

APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 37 of 48

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

HEAD SAR TEST SETUP PHOTOGRAPHS
Right Head Section / Cheek-Touch Position



Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 38 of 48

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



HEAD SAR TEST SETUP PHOTOGRAPHS

Right Head Section / Ear-Tilt Position (15°)




Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 39 of 48

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

HEAD SAR TEST SETUP PHOTOGRAPHS

Left Head Section / Cheek-Touch Position

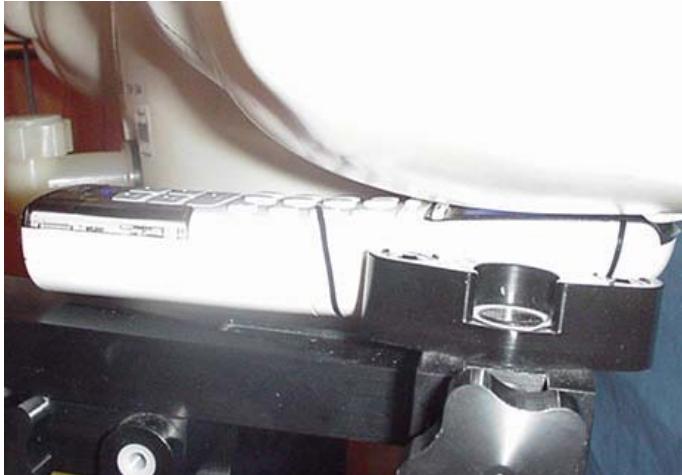

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 40 of 48

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



Certificate No. 2470.01

HEAD SAR TEST SETUP PHOTOGRAPHS

Left Head Section / Ear-Tilt Position (15°)




Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 41 of 48

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



BODY-WORN SAR TEST SETUP PHOTOGRAPHS

0.6 cm Belt-Clip Spacing from Back of DUT to Planar Phantom
 (DUT with Plastic Belt-Clip and Noise Canceling Headset)

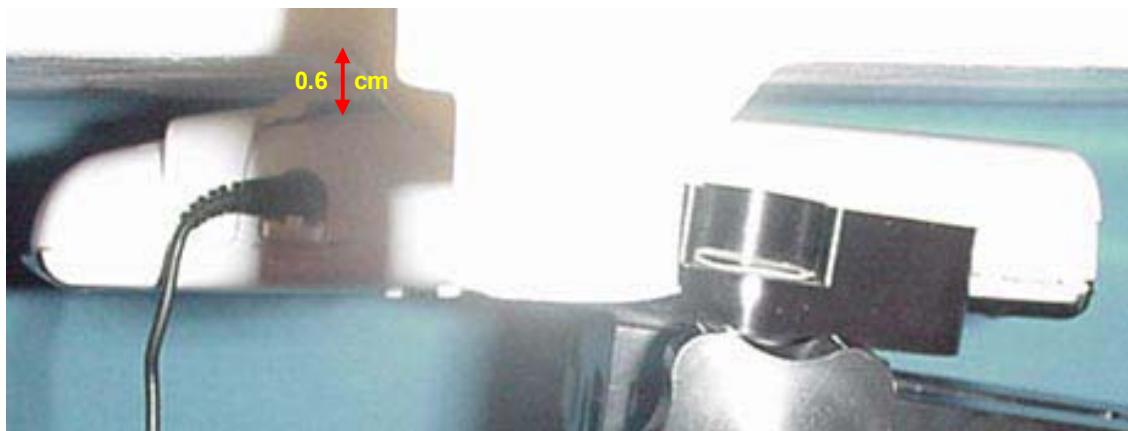

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 42 of 48

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 IAC-MRA  Certificate No. 2470.01
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

DUT PHOTOGRAPHS



Front of DUT



Back of DUT



Back of DUT with Plastic Belt-Clip



Top end of DUT




Bottom end of DUT

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)			Tx Freq.:	2401.056 - 2482.272 MHz	
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 43 of 48

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

DUT PHOTOGRAPHS

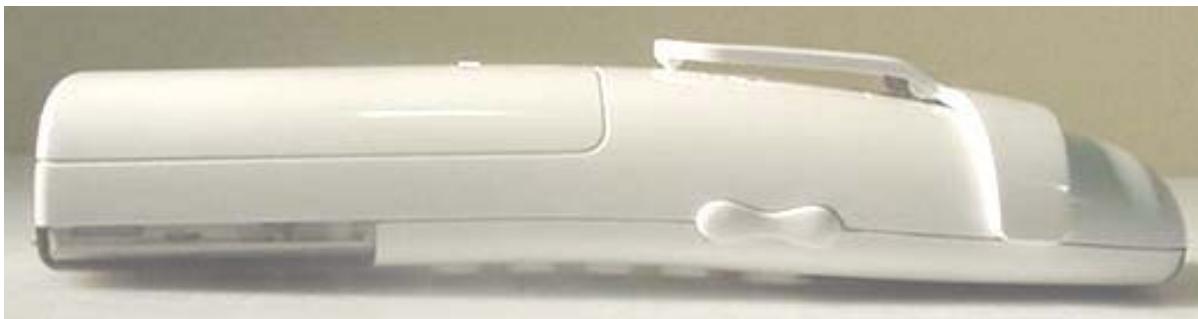

Left Side of DUT with Plastic Belt-Clip



Right Side of DUT with Plastic Belt-Clip



DUT Battery Compartment



Ni-MH Battery 3.6V, 800mAh

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)			Tx Freq.:	2401.056 - 2482.272 MHz	
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 44 of 48

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



Certificate No. 2470.01

DUT PHOTOGRAPHS



DUT with Noise Canceling Headset Audio Accessory (Plantronics M215)

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)			Tx Freq.:	2401.056 - 2482.272 MHz	
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 45 of 48

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



Certificate No. 2470.01

APPENDIX E - SYSTEM VALIDATION

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 46 of 48

 <small>Testing and Engineering Services Ltd.</small>	Date of Evaluation:	June 08, 2007	Document Serial No.:	SV2450M-060807-R1.1
Evaluation Type:	System Validation	Validation Dipole:	2450 MHz	Fluid Type: Body

2450 MHz SYSTEM VALIDATION

Type:

2450 MHz Validation Dipole

Asset Number:

00025

Serial Number:

150

Place of Validation:

Celltech Labs Inc.

Date of Validation:

June 08, 2007

Celltech Labs Inc. certifies that the 2450 MHz System Validation was performed on the date indicated above.

Performed by:

Cheri Frangiadakis

Approved by:

Jon Hughes

1. Dipole Construction & Electrical Characteristics

The validation dipole was constructed in accordance with the requirements specified in IEEE Standard 1528-2003 and International Standard IEC 62209-1:2005. The electrical properties were measured using an HP 8753ET Network Analyzer. The network analyzer was calibrated to the validation dipole N-type connector feed point using an HP85032E Type N calibration kit. The dipole was placed parallel to a planar phantom at a separation distance of 10.0mm from the simulating fluid using a loss-less dielectric spacer. The measured input impedance is:


Feed point impedance at 2450 MHz

$\text{Re}\{Z\} = 45.100\Omega$

$\text{Im}\{Z\} = 3.5605\Omega$



Return Loss at 2450 MHz

-23.411dB

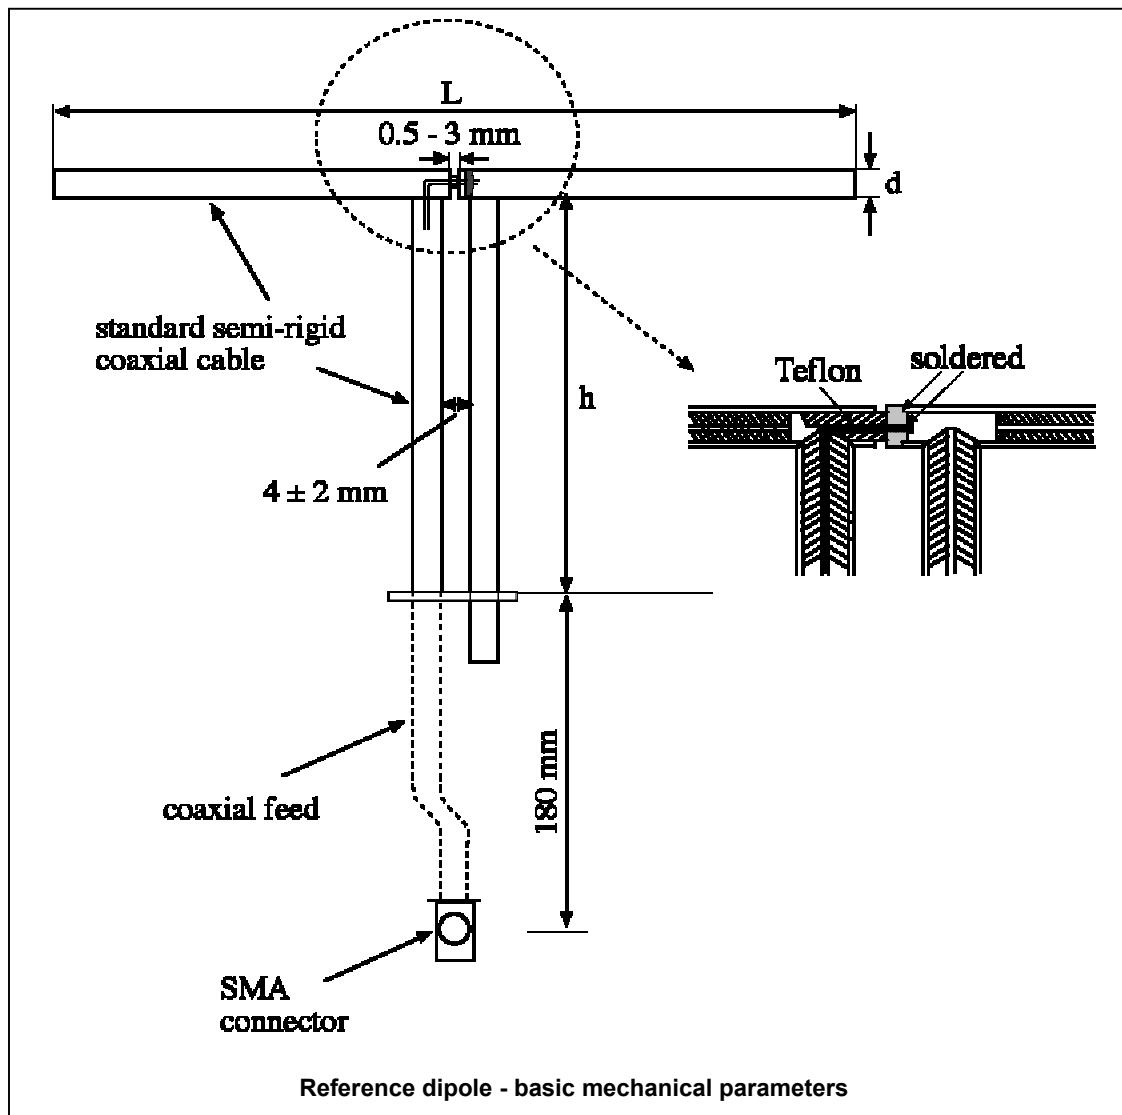

 Testing and Engineering Services Ltd.	Date of Evaluation:	June 08, 2007	Document Serial No.:	SV2450M-060807-R1.1
	Evaluation Type:	System Validation	Validation Dipole:	2450 MHz
Fluid Type:		Body		

2. Validation Dipole VSWR Data

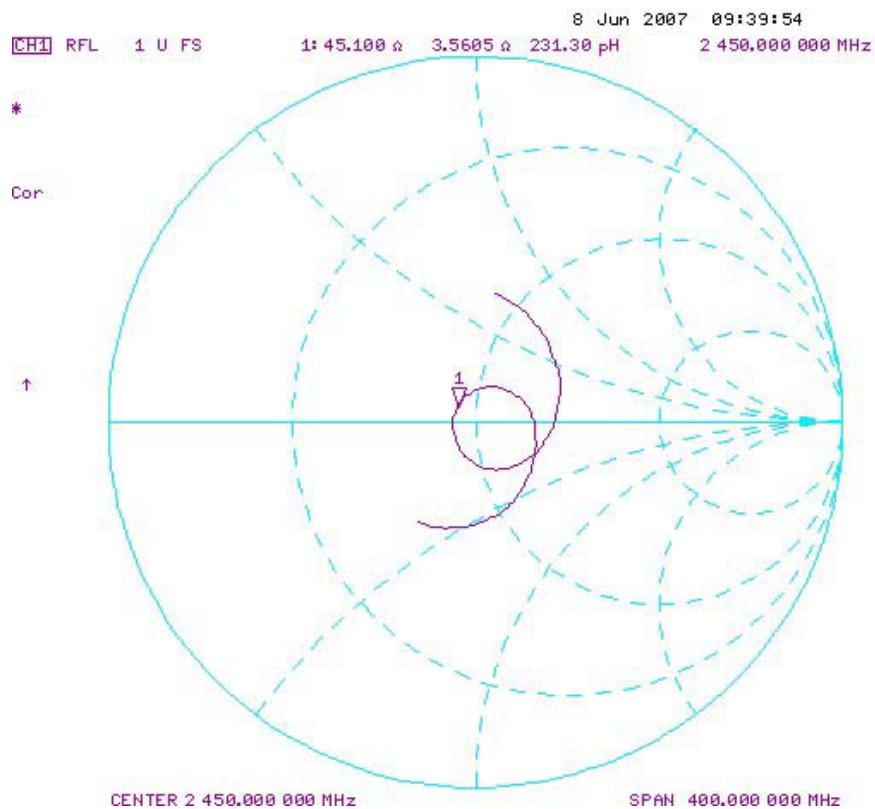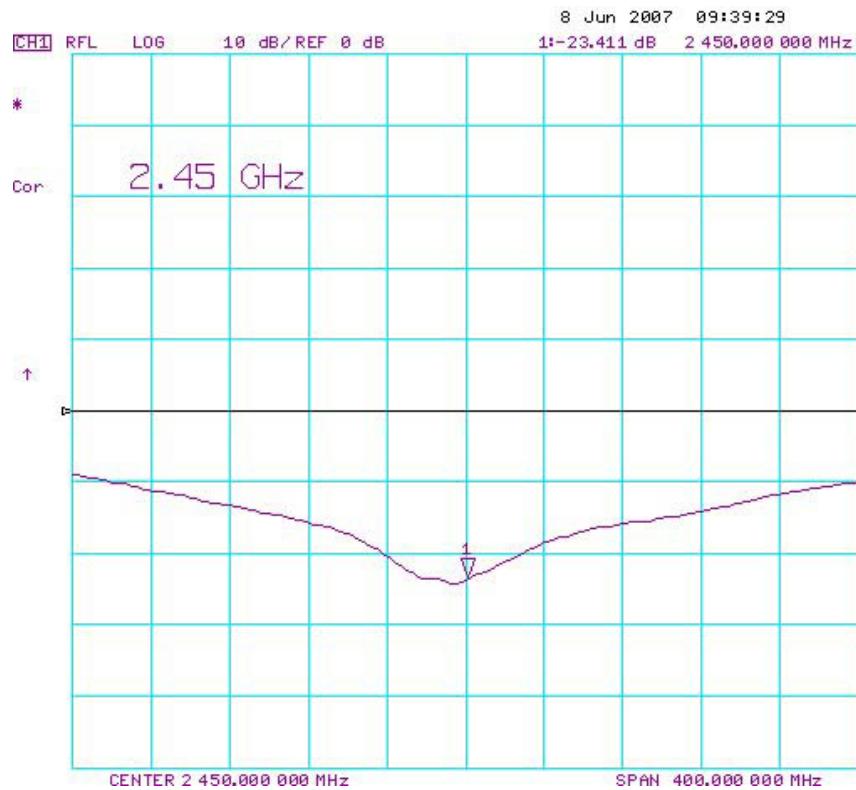


3. Validation Dipole Dimensions

Frequency (MHz)	L (mm)	H (mm)	D (mm)
300	396.0	250.0	6.0
450	270.0	167.0	6.0
835	161.0	89.8	3.6
900	149.0	83.3	3.6
1450	89.1	51.7	3.6
1800	72.0	41.7	3.6
1900	68.0	39.5	3.6
2000	64.5	37.5	3.6
2450	51.5	30.4	3.6
3000	41.5	25.0	3.6

4. Validation Phantom

The validation phantom is the SAM (Specific Anthropomorphic Mannequin) phantom manufactured by Schmid & Partner Engineering AG. The SAM phantom is a Fiberglass shell integrated in a wooden table. The shape of the shell corresponds to the phantom defined by SCC34-SC2. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness: 2.0 ± 0.1 mm
Filling Volume: Approx. 25 liters
Dimensions: 50 cm (W) x 100 cm (L)

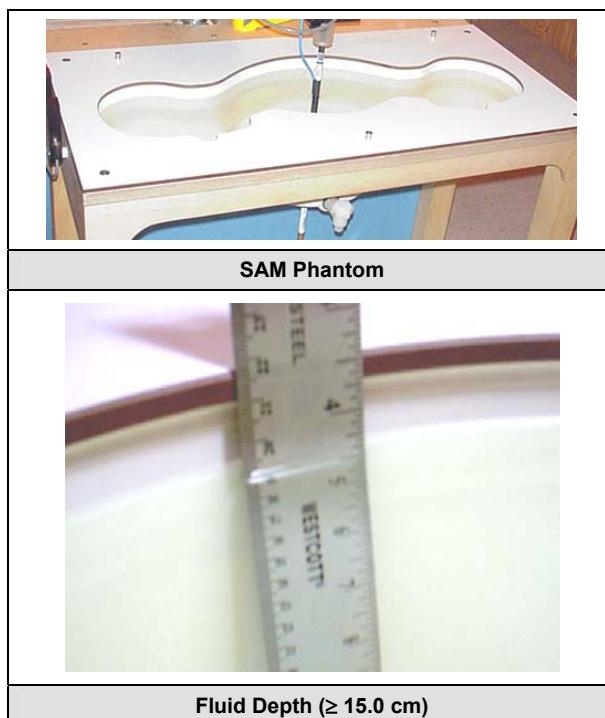

Celltech Testing and Engineering Services Ltd.	Date of Evaluation:	June 08, 2007	Document Serial No.:	SV2450M-060807-R1.1
	Evaluation Type:	System Validation	Validation Dipole:	2450 MHz

5. 2450 MHz System Validation Setup



Celltech Testing and Engineering Services Ltd.	Date of Evaluation:	June 08, 2007	Document Serial No.:	SV2450M-060807-R1.1
	Evaluation Type:	System Validation	Validation Dipole:	2450 MHz


6. 2450 MHz Dipole Setup



7. SAR Measurement

Measurements were made at the planar section of the SAM phantom using a dosimetric E-field probe EX3DV4 (S/N: 3600, conversion factor 6.31). The SAR measurement was performed with the E-field probe in mechanical detection mode only. The setup and determination of the forward power into the dipole was performed using the procedures described below.

First the power meter PM1 (including attenuator Att1) is connected to the cable to measure the forward power at the location of the dipole connector (X). The signal generator is adjusted for the desired forward power at the dipole connector (taking into account the attenuation of Att1) as read by power meter PM2. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2. If the signal generator does not allow adjustment in 0.01dB steps, the remaining difference at PM2 must be taken into consideration. PM3 records the reflected power from the dipole to ensure that the value is not changed from the previous value. The reflected power should be 20dB below the forward power.

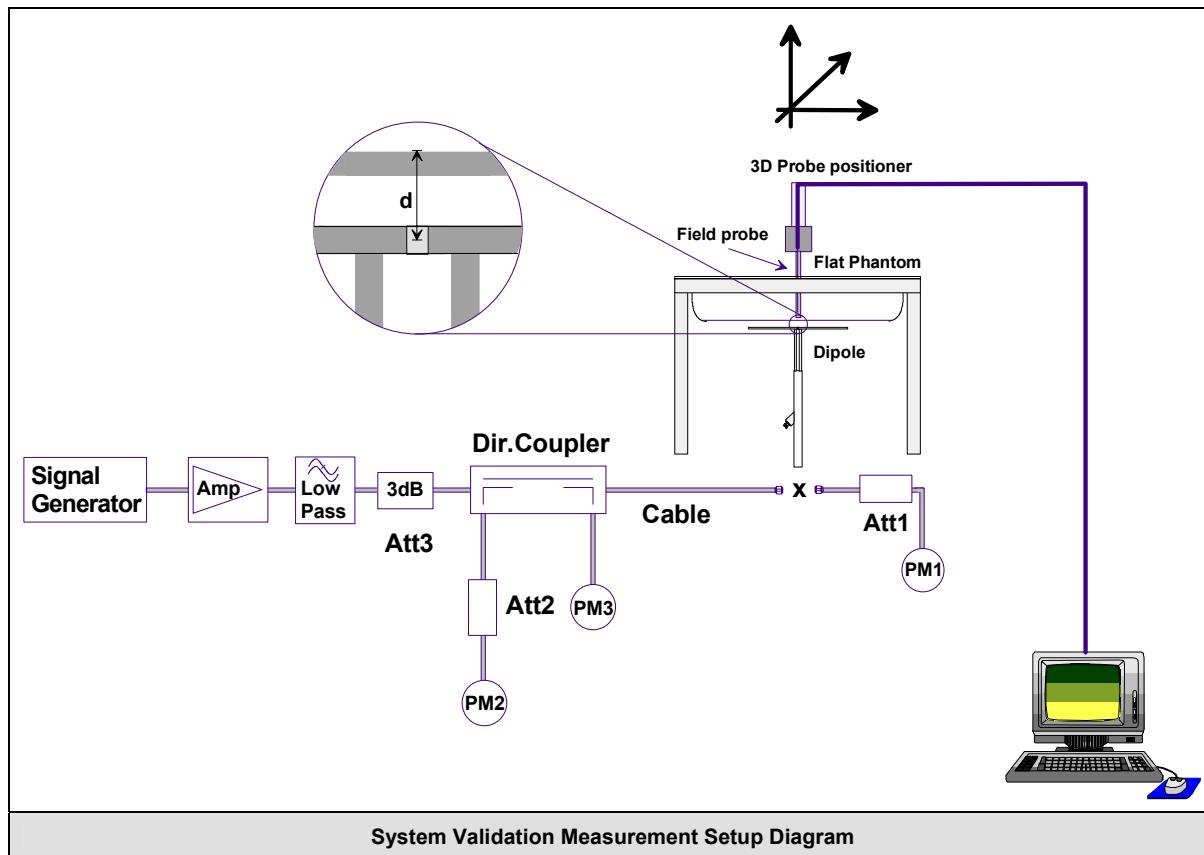

8. Measurement Conditions

The SAM phantom was filled with 2450 MHz Body tissue simulant.

Relative Permittivity: 50.1 (-4.9% deviation from target)

Conductivity: 1.99 mho/m (+2.1% deviation from target)

Fluid Temperature: 21.5 °C (Start of Test) / 21.2 °C (End of Test)

Fluid Depth: ≥ 15.0 cm

Environmental Conditions:

Ambient Temperature: 22.7 °C

Barometric Pressure: 101.1 kPa

Humidity: 31 %

The 2450 MHz Body tissue simulant consisted of the following ingredients:

Ingredient	Percentage by weight	
Water	69.98%	
Glycol Monobutyl	30.00%	
Salt	0.02%	
Target Dielectric Parameters:	$\epsilon_r = 52.7$ (+/-5%)	$\sigma = 1.95$ S/m (+/-5%)

9. System Validation SAR Results

SAR @ 0.25W Input averaged over 1g (W/kg)			SAR @ 1W Input averaged over 1g (W/kg)				
SPEAG Target		Measured	Deviation	SPEAG Target		Measured	Deviation
12.8	+/- 10%	13.4	+4.7%	51.2	+/- 10%	53.6	+4.7%
SAR @ 0.25W Input averaged over 10g (W/kg)			SAR @ 1W Input averaged over 10g (W/kg)				
SPEAG Target		Measured	Deviation	SPEAG Target		Measured	Deviation
5.93	+/- 10%	6.03	+1.7%	23.7	+/- 10%	24.1	+1.7%

Dipole Type	Distance [mm]	Frequency [MHz]	SAR (1g) [W/kg]	SAR (10g) [W/kg]	SAR (peak) [W/kg]
D300V2	15	300	3.02	2.06	4.36
D450V2	15	450	5.01	3.36	7.22
D835V2	15	835	9.71	6.38	14.1
D900V2	15	900	11.1	7.17	16.3
D1450V2	10	1450	29.6	16.6	49.8
D1500V2	10	1500	30.8	17.1	52.1
D1640V2	10	1640	34.4	18.7	59.4
D1800V2	10	1800	38.5	20.3	67.5
D1900V2	10	1900	39.8	20.8	69.6
D2000V2	10	2000	40.9	21.2	71.5
D2450V2	10	2450	51.2	23.7	97.6
D3000V2	10	3000	61.9	24.8	136.7

Table 32.1: Numerical reference SAR values for SPEAG dipoles and flat phantom filled with body-tissue simulating liquid. Note: All SAR values normalized to 1 W forward power.

 Testing and Engineering Services Ltd.	Date of Evaluation:	June 08, 2007	Document Serial No.:	SV2450M-060807-R1.1
	Evaluation Type:	System Validation	Validation Dipole:	2450 MHz
	Fluid Type:	Body		

System Validation - 2450 MHz Dipole - June 8, 2007

DUT: Dipole 2450 MHz; Asset: 00025; Serial: 150

Ambient Temp: 22.7°C; Fluid Temp: 21.5°C; Barometric Pressure: 101.1 kPa; Humidity: 31%

Communication System: CW

Forward Conducted Power: 250 mW

Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.99$ mho/m; $\epsilon_r = 50.1$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3600; ConvF(6.31, 6.31, 6.31); Calibrated: 24/01/2007
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 21/06/2006
- Phantom: SAM 4.0; Type: Fiberglas; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

2450 MHz System Validation/Area Scan (6x10x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 13.1 mW/g

2450 MHz System Validation/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 91.9 V/m; Power Drift = -0.128 dB

Peak SAR (extrapolated) = 28.6 W/kg

SAR(1 g) = 13.4 mW/g; SAR(10 g) = 6.03 mW/g

Maximum value of SAR (measured) = 15.5 mW/g

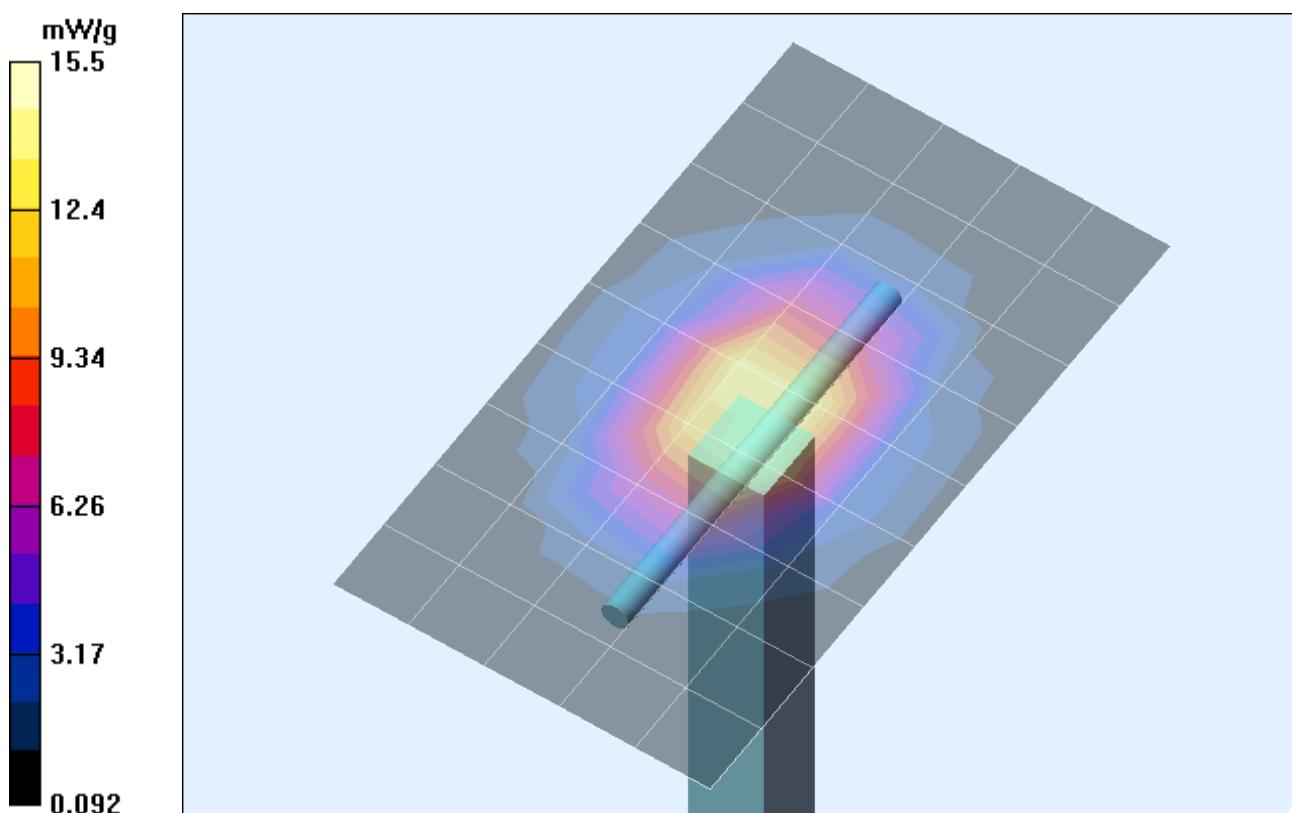

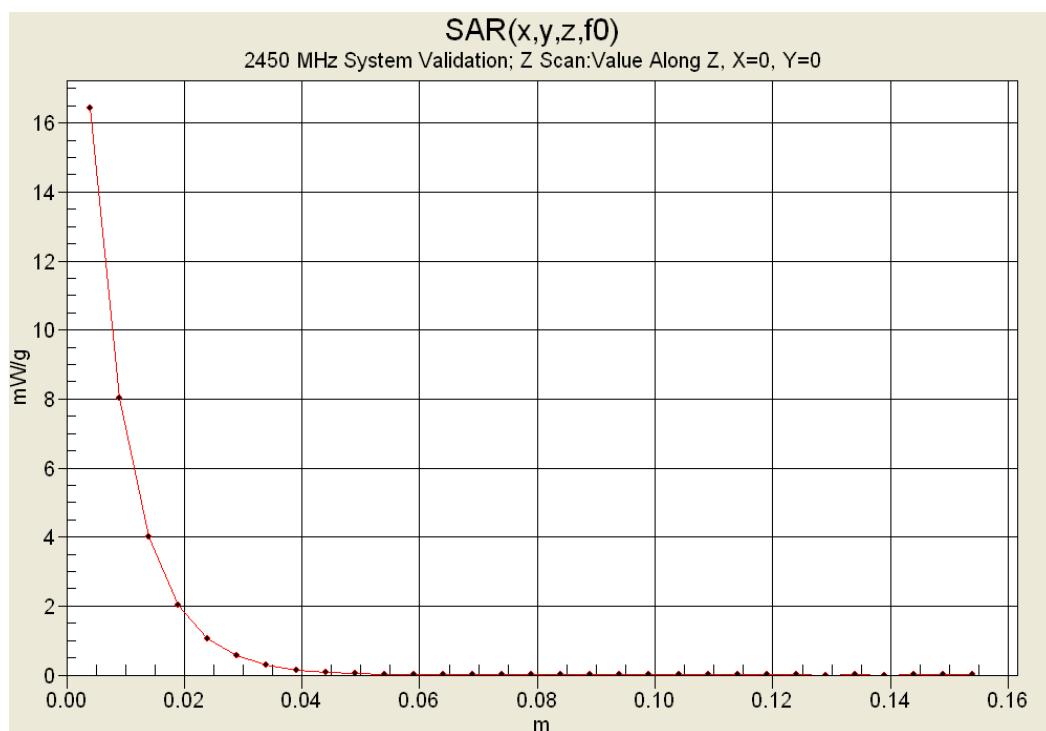

10. Measured Fluid Dielectric Parameters

System Validation - 2450 MHz (Body)

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

Fri 08/Jun/2007

Frequency (GHz)

FCC_eH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon

FCC_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma

FCC_eB FCC Limits for Body Epsilon

FCC_sB FCC Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
2.3500	52.83	1.85	50.39	1.89
2.3600	52.82	1.86	50.32	1.90
2.3700	52.81	1.87	50.28	1.91
2.3800	52.79	1.88	50.28	1.93
2.3900	52.78	1.89	50.31	1.94
2.4000	52.77	1.90	50.26	1.95
2.4100	52.75	1.91	50.24	1.96
2.4200	52.74	1.92	50.21	1.96
2.4300	52.73	1.93	50.21	1.98
2.4400	52.71	1.94	50.13	1.99
2.4500	52.70	1.95	50.09	1.99
2.4600	52.69	1.96	50.01	2.03
2.4700	52.67	1.98	50.10	2.03
2.4800	52.66	1.99	50.12	2.05
2.4900	52.65	2.01	50.09	2.07
2.5000	52.64	2.02	50.08	2.07
2.5100	52.62	2.04	50.03	2.08
2.5200	52.61	2.05	50.02	2.09
2.5300	52.60	2.06	49.93	2.10
2.5400	52.59	2.08	49.87	2.11
2.5500	52.57	2.09	49.78	2.13

 Testing and Engineering Services Ltd.	Date of Evaluation:	June 08, 2007	Document Serial No.:	SV2450M-060807-R1.1
	Evaluation Type:	System Validation	Validation Dipole:	2450 MHz
			Fluid Type:	Body

11. Measurement Uncertainties

UNCERTAINTY BUDGET FOR SYSTEM VALIDATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	Uncertainty Value ±% (1g)	V _i or V _{eff}
Measurement System						
Probe calibration (2450 MHz)	5.9	Normal	1	1.0	5.9	∞
Axial isotropy of the probe	4.7	Rectangular	1.732050808	0.7	1.9	∞
Spherical isotropy of the probe	9.6	Rectangular	1.732050808	0.7	3.9	∞
Spatial resolution	0.0	Rectangular	1.732050808	1	0.0	∞
Boundary effects	1.0	Rectangular	1.732050808	1	0.6	∞
Probe linearity	4.7	Rectangular	1.732050808	1	2.7	∞
Detection limit	1.0	Rectangular	1.732050808	1	0.6	∞
Readout electronics	0.3	Normal	1	1	0.3	∞
Response time	0.8	Rectangular	1.732050808	1	0.5	∞
Integration time	2.6	Rectangular	1.732050808	1	1.5	∞
RF ambient conditions	3.0	Rectangular	1.732050808	1	1.7	∞
Mech. constraints of robot	0.4	Rectangular	1.732050808	1	0.2	∞
Probe positioning	2.9	Rectangular	1.732050808	1	1.7	∞
Extrapolation & integration	1.0	Rectangular	1.732050808	1	0.6	∞
Test Sample Related						
Device positioning	2.0	Normal	1.732050808	1	1.2	∞
Power drift	5.0	Rectangular	1.732050808	1	2.9	∞
Phantom and Setup						
Phantom uncertainty	4.0	Rectangular	1.732050808	1	2.3	∞
Liquid conductivity (target)	5.0	Rectangular	1.732050808	0.7	2.0	∞
Liquid conductivity (measured)	5.0	Rectangular	1.732050808	0.7	2.0	∞
Liquid permittivity (target)	5.0	Rectangular	1.732050808	0.6	1.7	∞
Liquid permittivity (measured)	5.0	Rectangular	1.732050808	0.6	1.7	∞
Combined Standard Uncertainty					9.97	
Expanded Uncertainty (k=2)					19.94	
Note(s)	1. Measurement Uncertainty Table in accordance with IEC 62209-1:2005.					

UNCERTAINTY BUDGET FOR SYSTEM VALIDATION						
Error Description	Uncertainty Value $\pm\%$	Probability Distribution	Divisor	ci 1g	Uncertainty Value $\pm\%$ (1g)	V_i or V_{eff}
Measurement System						
Probe calibration (2450 MHz)	5.9	Normal	1	1	5.9	∞
Axial isotropy of the probe	4.7	Rectangular	1.732050808	1	2.7	∞
Spherical isotropy of the probe	0	Rectangular	1.732050808	1	0.0	∞
Spatial resolution	0	Rectangular	1.732050808	1	0.0	∞
Boundary effects	1	Rectangular	1.732050808	1	0.6	∞
Probe linearity	4.7	Rectangular	1.732050808	1	2.7	∞
Detection limit	1	Rectangular	1.732050808	1	0.6	∞
Readout electronics	0.3	Normal	1	1	0.3	∞
Response time	0	Rectangular	1.732050808	1	0.0	∞
Integration time	0	Rectangular	1.732050808	1	0.0	∞
RF ambient conditions	3	Rectangular	1.732050808	1	1.7	∞
Mech. constraints of robot	0.4	Rectangular	1.732050808	1	0.2	∞
Probe positioning	2.9	Rectangular	1.732050808	1	1.7	∞
Extrapolation & integration	1	Rectangular	1.732050808	1	0.6	∞
Dipole						
Dipole Positioning	2	Normal	1.732050808	1	1.2	∞
Power & Power Drift	4.7	Normal	1.732050808	1	2.7	∞
Phantom and Setup						
Phantom uncertainty	4	Rectangular	1.732050808	1	2.3	∞
Liquid conductivity (target)	5	Rectangular	1.732050808	0.64	1.8	∞
Liquid conductivity (measured)	5	Normal	1	0.64	3.2	∞
Liquid permittivity (target)	5	Rectangular	1.732050808	0.6	1.7	∞
Liquid permittivity (measured)	5	Normal	1	0.6	3.0	∞
Combined Standard Uncertainty					9.81	
Expanded Uncertainty (k=2)					19.61	
Note(s)	1. Measurement Uncertainty Table in accordance with IEEE 1528-2003.					

12. Test Equipment List

TEST EQUIPMENT	ASSET NO.	SERIAL NO.	DATE OF CAL.	CAL. DUE DATE
SPEAG DASY4 Measurement Server	00158	1078	N/A	N/A
SPEAG Robot	00046	599396-01	N/A	N/A
SPEAG DAE4	00019	353	21Jun06	21Jun07
SPEAG EX3DV4 E-Field Probe	00213	3600	24Jan07	24Jan08
2450 MHz Validation Dipole	00025	150	08Jun07	08Jun08
SPEAG SAM Phantom V4.0C	00154	1033	N/A	N/A
ALS-PR-DIEL Dielectric Probe Kit	00160	260-00953	N/A	N/A
Gigatronics 8652A Power Meter	00007	1835272	26Mar07	26Mar08
Gigatronics 80701A Power Sensor	00014	1833699	22Jan07	22Jan08
Gigatronics 80701A Power Sensor	00109	1834366	26Mar07	26Mar08
HP 8753ET Network Analyzer	00134	US39170292	20Apr07	20Apr08
HP 8648D Signal Generator	00005	3847A00611	NCR	NCR
Amplifier Research 5S1G4 Power Amplifier	00106	26235	NCR	NCR

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



Certificate No. 2470.01

APPENDIX F - PROBE CALIBRATION

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 47 of 48

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **Celltech**

Certificate No: EX3-3600_Jan07

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3600**

Calibration procedure(s) **QA CAL-01.v5 and QA CAL-14.v3**
Calibration procedure for dosimetric E-field probes

Calibration date: **January 24, 2007**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Power sensor E4412A	MY41495277	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Power sensor E4412A	MY41498087	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-06 (METAS, No. 217-00592)	Aug-07
Reference 20 dB Attenuator	SN: S5086 (20b)	4-Apr-06 (METAS, No. 251-00558)	Apr-07
Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-06 (METAS, No. 217-00593)	Aug-07
Reference Probe ES3DV2	SN: 3013	4-Jan-07 (SPEAG, No. ES3-3013_Jan07)	Jan-08
DAE4	SN: 654	21-Jun-06 (SPEAG, No. DAE4-654_Jun06)	Jun-07
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-06)	In house check: Oct-07

Calibrated by: **Katja Pokovic** **Technical Manager**

Approved by: **Niels Kuster** **Quality Manager**

Issued: January 24, 2007

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Federal Office of Metrology and Accreditation
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORMx,y,z	sensitivity in free space
ConF	sensitivity in TSL / NORM x,y,z
DCP	diode compression point
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz)", July 2001

Methods Applied and Interpretation of Parameters:

- NORM x,y,z :** Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM x,y,z are only intermediate values, i.e., the uncertainties of NORM x,y,z does not effect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(f) x,y,z = NORM x,y,z * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCPx,y,z:** DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM x,y,z * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe EX3DV4

SN:3600

Manufactured: January 10, 2007
Calibrated: January 24, 2007

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

DASY - Parameters of Probe: EX3DV4 SN:3600

Sensitivity in Free Space^A

NormX	0.460 \pm 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$
NormY	0.470 \pm 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	0.380 \pm 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$

Diode Compression^B

DCP X	90 mV
DCP Y	88 mV
DCP Z	89 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL **1810 MHz** **Typical SAR gradient: 10 % per mm**

Sensor Center to Phantom Surface Distance	2.0 mm	3.0 mm
SAR _{be} [%] Without Correction Algorithm	4.5	3.5
SAR _{be} [%] With Correction Algorithm	0.2	0.4

TSL **5800 MHz** **Typical SAR gradient: 30 % per mm**

Sensor Center to Phantom Surface Distance	2.0 mm	3.0 mm
SAR _{be} [%] Without Correction Algorithm	3.5	2.0
SAR _{be} [%] With Correction Algorithm	0.1	0.3

Sensor Offset

Probe Tip to Sensor Center **1.0 mm**


The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Page 8).

^B Numerical linearization parameter: uncertainty not required.



Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

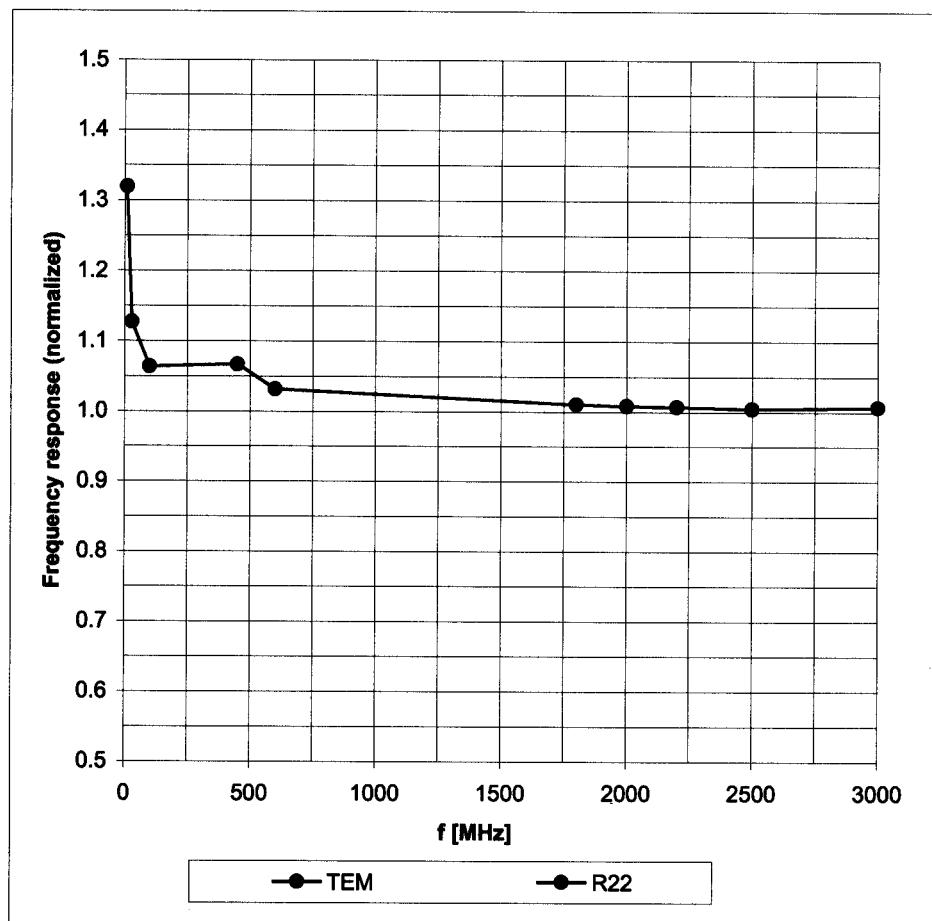


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 0^\circ$

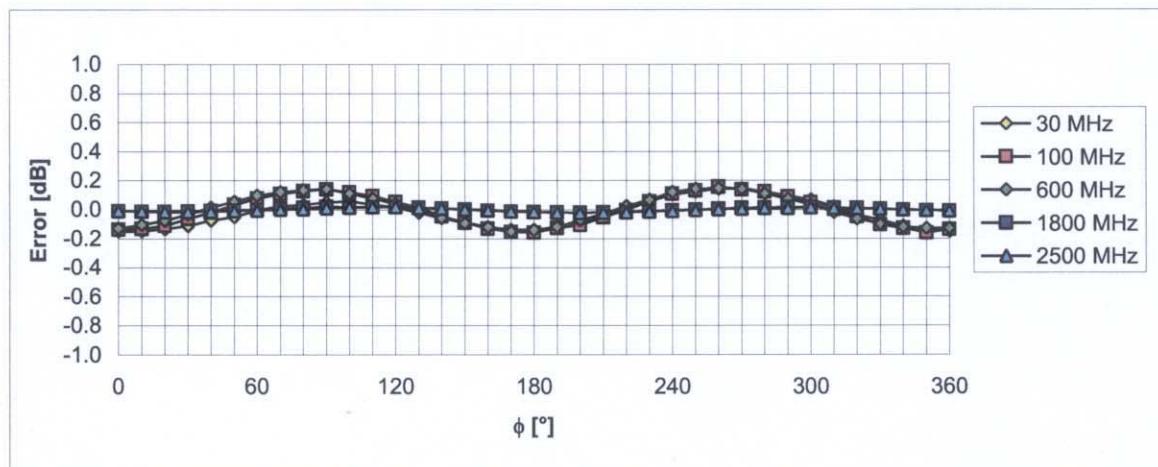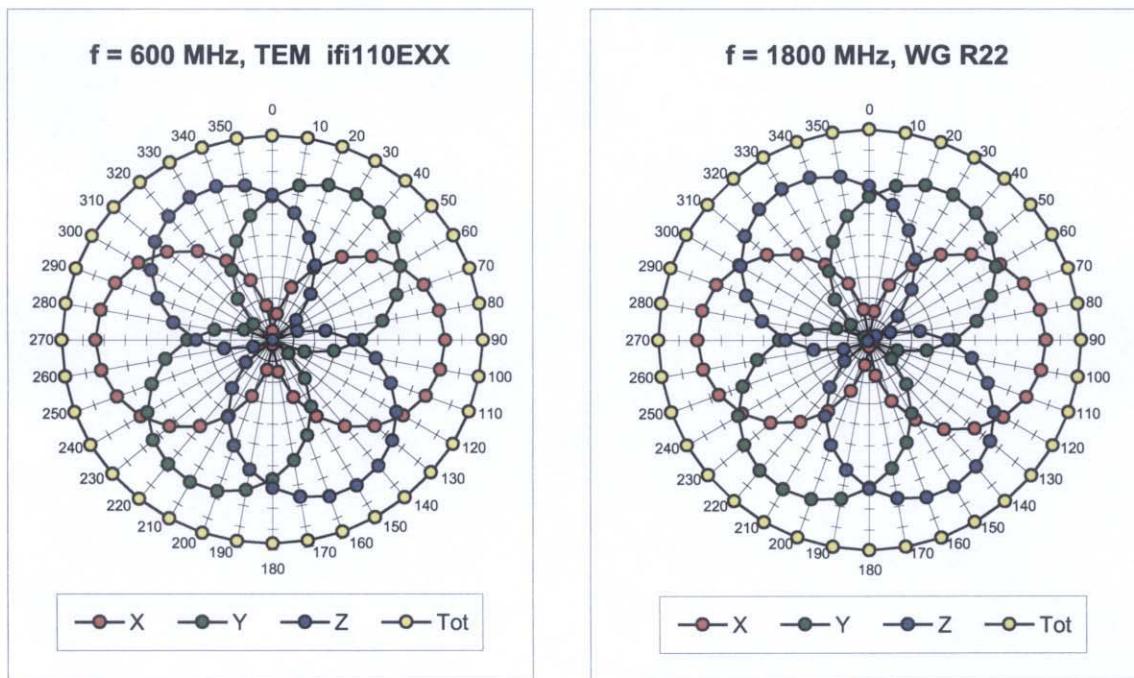


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(\text{SAR}_{\text{head}})$
(Waveguide R22, $f = 1800$ MHz)

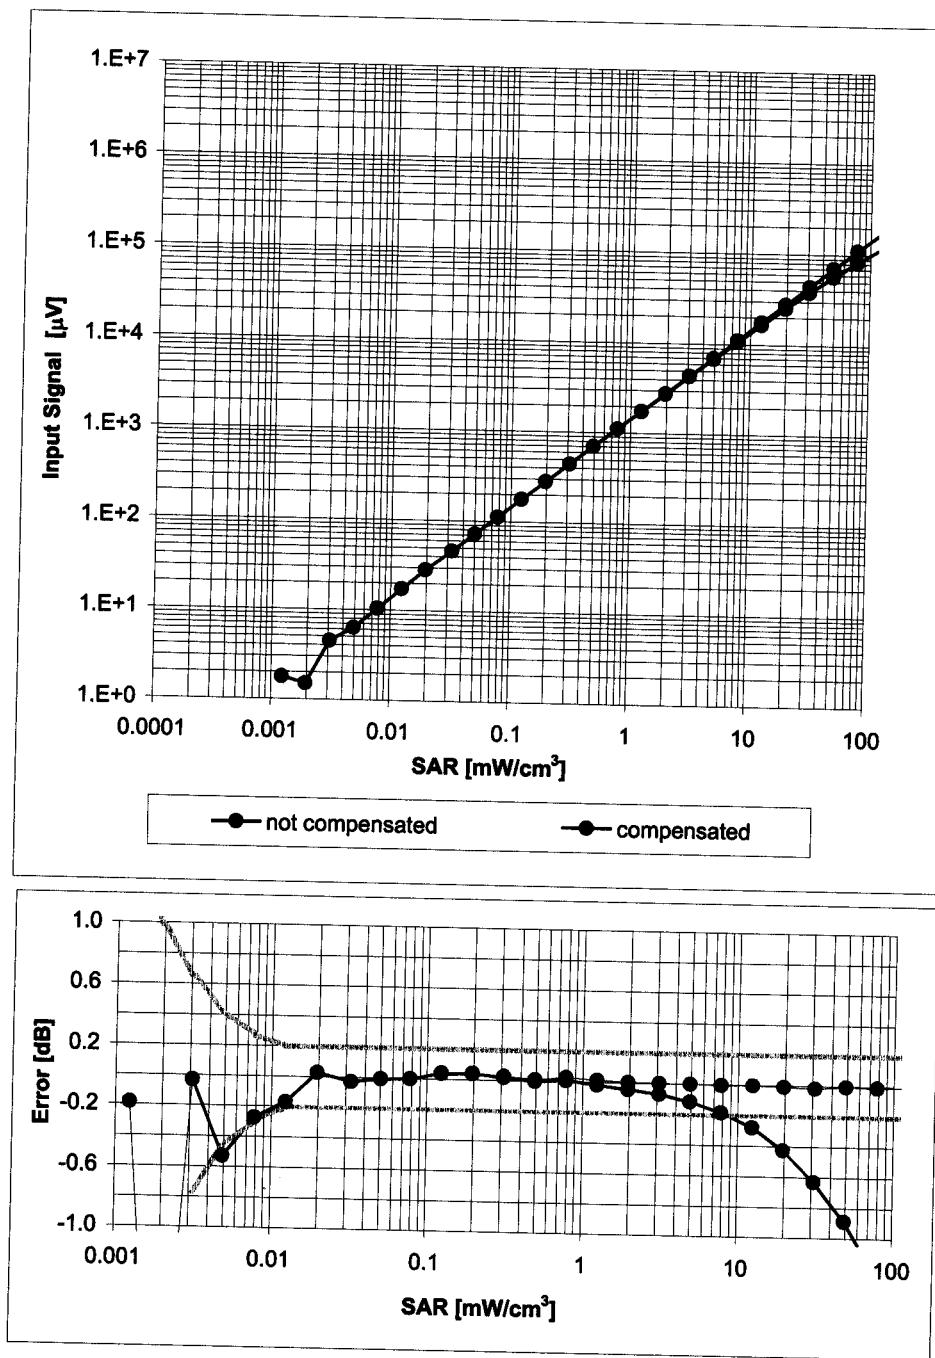

Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

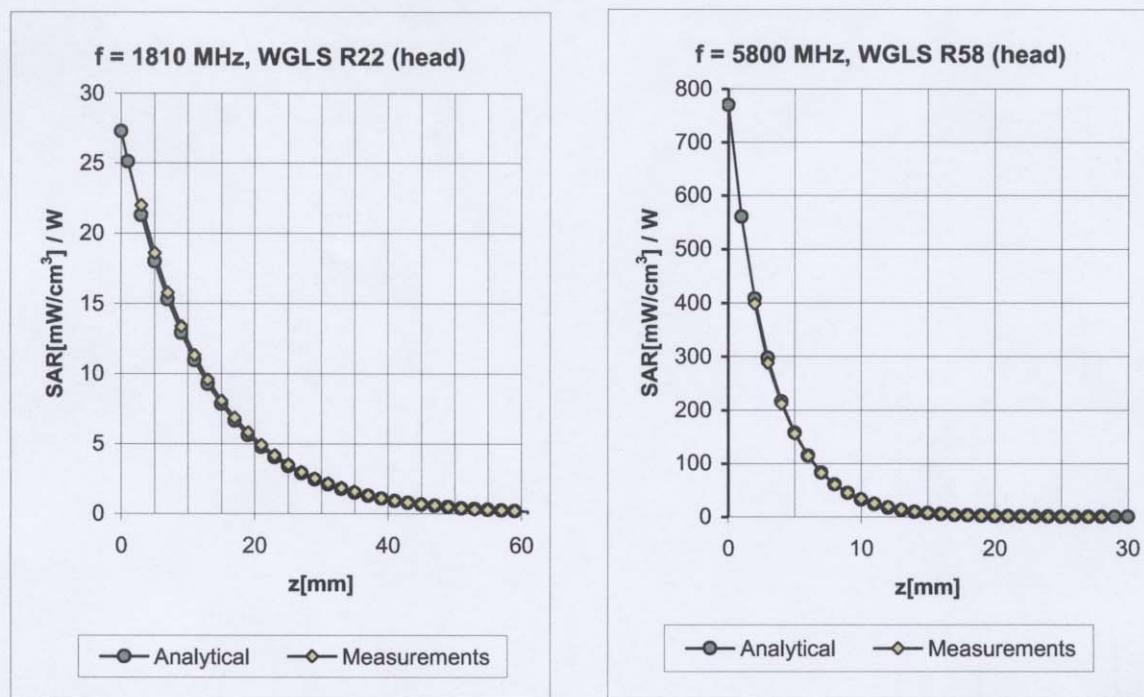


f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF	Uncertainty
1810	$\pm 50 / \pm 100$	Head	$40.0 \pm 5\%$	$1.40 \pm 5\%$	0.20	1.01	7.02	$\pm 11.0\% \text{ (k=2)}$
1950	$\pm 50 / \pm 100$	Head	$40.0 \pm 5\%$	$1.40 \pm 5\%$	0.26	1.05	6.59	$\pm 11.0\% \text{ (k=2)}$
2450	$\pm 50 / \pm 100$	Head	$39.2 \pm 5\%$	$1.80 \pm 5\%$	0.44	1.00	6.37	$\pm 11.8\% \text{ (k=2)}$
5800	$\pm 50 / \pm 100$	Head	$35.3 \pm 5\%$	$5.27 \pm 5\%$	0.37	1.65	4.34	$\pm 13.1\% \text{ (k=2)}$

1810	$\pm 50 / \pm 100$	Body	$53.3 \pm 5\%$	$1.52 \pm 5\%$	0.24	1.06	6.85	$\pm 11.0\% \text{ (k=2)}$
1950	$\pm 50 / \pm 100$	Body	$53.3 \pm 5\%$	$1.52 \pm 5\%$	0.16	1.35	6.54	$\pm 11.0\% \text{ (k=2)}$
2450	$\pm 50 / \pm 100$	Body	$52.7 \pm 5\%$	$1.95 \pm 5\%$	0.42	1.00	6.31	$\pm 11.8\% \text{ (k=2)}$
5200	$\pm 50 / \pm 100$	Body	$49.0 \pm 5\%$	$5.30 \pm 5\%$	0.35	1.70	4.10	$\pm 13.1\% \text{ (k=2)}$
5500	$\pm 50 / \pm 100$	Body	$48.6 \pm 5\%$	$5.65 \pm 5\%$	0.32	1.70	3.95	$\pm 13.1\% \text{ (k=2)}$
5800	$\pm 50 / \pm 100$	Body	$48.2 \pm 5\%$	$6.00 \pm 5\%$	0.33	1.70	4.14	$\pm 13.1\% \text{ (k=2)}$

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

Deviation from Isotropy in HSL

Error (ϕ, θ), $f = 900$ MHz

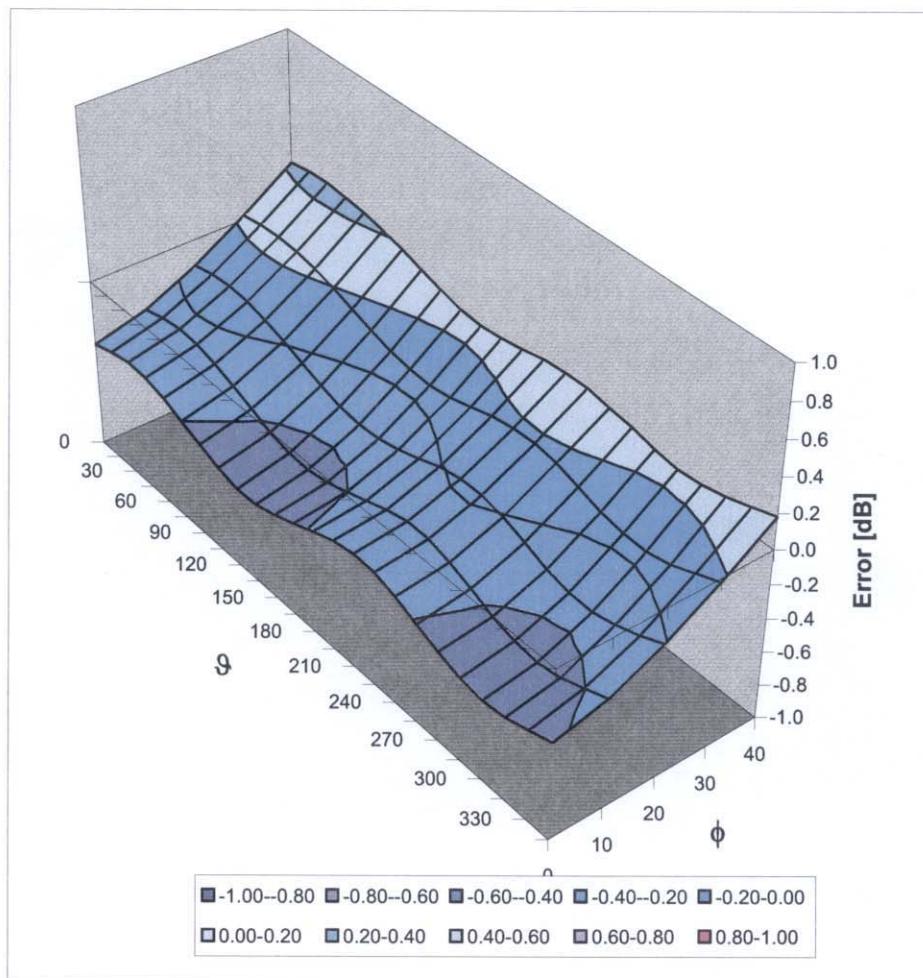

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 21-22, 2007	<u>Test Report Serial No.</u> 051407S9P-T831-S15T	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> July 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



Certificate No. 2470.01

APPENDIX G - SAM PHANTOM CERTIFICATE OF CONFORMITY

Company:	InGrid, Inc.	FCC ID:	S9PHSC1000	Model:	HSC1000	INGRID
DUT Type:	Portable 2.4 GHz Cordless Handset (Grid Controller)	Tx Freq.:	2401.056 - 2482.272 MHz			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 48 of 48

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Certificate of conformity / First Article Inspection

Item	SAM Twin Phantom V4.0
Type No	QD 000 P40 BA
Series No	TP-1002 and higher
Manufacturer / Origin	Untersee Composites Hauptstr. 69 CH-8559 Fruthwilen Switzerland

Tests

The series production process used allows the limitation to test of first articles. Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series units (called samples).

Test	Requirement	Details	Units tested
Shape	Compliance with the geometry according to the CAD model.	IT'IS CAD File (*)	First article, Samples
Material thickness	Compliant with the requirements according to the standards	2mm +/- 0.2mm in specific areas	First article, Samples
Material parameters	Dielectric parameters for required frequencies	200 MHz – 3 GHz Relative permittivity < 5 Loss tangent < 0.05.	Material sample TP 104-5
Material resistivity	The material has been tested to be compatible with the liquids defined in the standards	Liquid type HSL 1800 and others according to the standard.	Pre-series, First article

Standards

- [1] CENELEC EN 50361
- [2] IEEE P1528-200x draft 6.5
- [3] IEC PT 62209 draft 0.9

(*) The IT'IS CAD file is derived from [2] and is also within the tolerance requirements of the shapes of [1] and [3].

Conformity

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standard [1] and draft standards [2] and [3].

Date

18.11.2001

Signature / Stamp


Schmid & Partner
Engineering AG

Zeughausstrasse 43, CH-8004 Zurich
Tel. +41 1 245 97 00, Fax +41 1 245 97 79