

MEASUREMENT REPORT of *Wireless LAN PCI Card*

Applicant : TRENDware International, INC.
EUT : 802.11g Wireless PCI Adapter
Model : as Appendix A
FCC ID : S9ZTEW423PI

Tested by :

Training Research Co., Ltd.

TEL : 886-2-26935155

FAX : 886-2-26934440

No. 255, Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C.


CERTIFICATION

We here by verify that:

The test data, data evaluation, test procedures and equipment configurations shown in this report were made mainly in accordance with the procedures given in ANSI C63.4 (2003) as a reference. All test were conducted by *Training Research Co., Ltd.*, 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Also, we attest to the accuracy of each.

We further submit that the energy emitted by the sample EUT tested as described in the report is **in compliance with** the technical requirements set forth in the FCC Rules Part 15 Subpart B (Declaration of Conformity) and Subpart C Section 15.247.

Applicant : TRENDware International, INC.
Applicant address : 3135 Kashiwa Street, Torrance, CA 90505, U.S.A.
FCC ID : S9ZTEW423PI
Report No. : C5115060435
Test Date : December 18, 2004

Prepared by: 
Jack Tsai

Approved by: 
Frank Tsai

Conditions of issue :

- (1) **This test report shall not be reproduced except in full, without written approval of TRC. And the test result contained within this report only relate to the sample submitted for testing.**
- (2) **This report must not be used by the client to claim product endorsement by NVLAP or any agency of U.S. Government.**
- (3) **This test report, measurements made by TRC are traceable to the NIST only Conducted and Radiated Method.**

★ NVLAP LAB CODE: 200174-0

Federal Communications Commission **Declaration of Conformity** **(DoC)**

for the following equipment:

Product name : 802.11g Wireless PCI Adapter
 Model name : as Appendix A
 Trade name : as Appendix A

Is herewith confirmed and found to comply with the requirements of CFR 47 part15 Subpart B - Unintentional Radiators regulation. The results of electromagnetic mission evaluation are shown in the report number : C5115060435

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation

| <i>Manufacturer</i> | <i>USA local representative</i> |
|--|---------------------------------|
| Company name: CAMEO COMMUNICATIONS, INC. | To be determined |
| Computer address: 6F, No.22, Chung Shin Rd., Hsi-Chih, Taipei 221, Taiwan | |
| ZIP / Postal code 221 | |
| Contact person: Jason Chang | |
| Title: Wireless Comm. R&D Dept Manager | |
| Internet e-mail address: jason_chang@mail.cameo.com.tw | |
| Tel / Fax: 886-2-26499800 / 886-2-26499984 | |

Tables of Contents

| | |
|---|----|
| I. GENERAL | 6 |
| 1.1 Introduction | 6 |
| 1.2 Description of EUT | 6 |
| 1.3 Test method | 6 |
| 1.4 Description of Support Equipment | 7 |
| 1.5 Configuration of System Under Test | 10 |
| 1.6 Verify the Frequency and Channel | 12 |
| 1.7 Test Procedure | 13 |
| 1.8 Location of the Test Site | 13 |
| 1.9 General Test Condition | 13 |
| II. Section 15.101(a) : Equipment Authorization of Unintentional Radiators | 14 |
| III. Section 15.203 : Antenna Requirement | 15 |
| IV. Section 15.207 : Power Line Conducted Emissions for AC Powered Units | 16 |
| 4.1 Test Condition & Setup | 16 |
| 4.2 List of Test Instruments | 17 |
| 4.3 Test Result of Conducted Emissions | 18 |
| Standby mode | 18 |
| IEEE 802.11b | 19 |
| IEEE 802.11g | 21 |
| V. Section 15.247(a) : Technical Description of the EUT | 22 |
| VI. Section 15.247(a)(2) : Bandwidth for Direct Sequence System | 23 |
| 6.1 Test Condition & Setup | 23 |
| 6.2 Test Instruments Configuration | 23 |
| 6.3 List of Test Instruments | 23 |
| 6.4 Test Result of Bandwidth | 23 |
| IEEE 802.11b/g CH01 | 24 |
| IEEE 802.11b/g CH06 | 25 |
| IEEE 802.11b/g CH11 | 26 |

| | |
|--|----|
| VII. Section 15.247(b) : Power Output | 27 |
| 7.1 Test Condition & Setup | 27 |
| 7.2 List of Test Instruments | 27 |
| 7.3 Test Result | 27 |
| VIII. Section 15.247(c) : Spurious Emissions (Radiated) | 28 |
| 8.1 Test Condition & Setup | 28 |
| 8.2 List of Test Instruments | 30 |
| 8.3 Test Result of Spurious Radiated Emissions | 31 |
| Standby mode | 31 |
| IEEE 802.11b CH01 | 33 |
| IEEE 802.11b CH06 | 35 |
| IEEE 802.11b CH11 | 37 |
| IEEE 802.11g CH01 | 39 |
| IEEE 802.11g CH06 | 41 |
| IEEE 802.11g CH11 | 43 |
| 8.4 Test Result of Bandedge | 45 |
| IEEE 802.11b | 46 |
| IEEE 802.11g | 48 |
| IX. Section 15.247(d) : Power Spectral Density | 50 |
| 9.1 Test Condition & Setup | 50 |
| 9.2 Test Instruments Configuration | 50 |
| 9.3 List of Test Instruments | 50 |
| 9.4 Test Result of Power Spectral Density | 51 |
| IEEE 802.11b/g CH01 | 52 |
| IEEE 802.11b/g CH06 | 53 |
| IEEE 802.11b/g CH11 | 54 |
| Appendix A: Brand name and Model name List | 55 |

I . GENERAL

1.1 Introduction

The following measurement report is submitted on behalf of applicant in support that the certification in accordance with Part 2 Subpart J and Part 15 Subpart A, B and C of the Commission's Rules and Regulations.

1.2 Description of EUT

| | |
|----------------------------|---|
| Product Description | : 802.11g Wireless PCI Adapter |
| FCC ID | : S9ZTEW423PI |
| Model Name | : as Appendix A |
| Frequency Range | : 2.412 GHz ~ 2.462GHz |
| Support Channel | : 11 Channels |
| Modulation Skill | : DBPSK, DQPSK, CCK, OFDM |
| Power Type | : Powered by Protocol Control Information Interface of PC |
| Data Cable | : None |

1.3 Test method

1. Put the EUT into a personal computer's PCI slot and fix it.
2. Using the PC and software provided by the manufacturer to control EUT, the test is performed under the specific conditions.
3. Set different data rate and channel (CH01/CH06/CH11) being tested and repeat the procedures above.
 - (3.1) Radiated for Intentional test:
making EUT to the mode of continuous transmission
 - (3.2) Conducted test and Radiated for unintentional test:
making EUT to the linking (Rx/Tx) mode with far support equipments

1.4 Description of Support Equipment

In order to construct the minimum testing, following equipment were used as the support units.

PC : **IBM 6840**
Model No. : 6840MJV
Serial No. : 96CC 0BT
FCC ID : DoC (Declaration of Confirmation) Approved
BSMI : 3892I279
Power type : 100 ~ 127 / 200 ~ 240VAC, 4A/2A 50/60 Hz, Switching
Power cord : Non-shielded, 182cm length, Plastic hood, No ferrite core

Monitor : **HP 15' Color Monitor**
Model No. : D2827A
Serial No. : KR91161719
FCC ID : C5F7NFCMC1518X
BSMI : 3872B039
Power type : 100 ~ 240 VAC / 50 ~ 60 Hz, Switching
Power cord : Shielded, 1.83m long, No ferrite core
Data cable : Shielded, 1.46m long, with two ferrite cores

Printer : **HP**
Model No. : C6464A
Serial No. : TH16LEB5PK
FCC ID : N/A, DoC Approved
BSMI : 3892H381
Power type : Switching adaptor
Power cord : Non-shielded, 173cm length, No ferrite core
(between adaptor and AC source)
Non-shielded, 180cm length, with ferrite core
(between printer and adaptor)
Data cable : Shielded, 1.70m length, No ferrite core

PS/2 Keyboard : HP
Model No. : SK-2501K
Serial No. : MR81008879
FCC ID : GYUR38SK
BSMI : 3862A621
Power type : By PC
Data cable : Shielded, 1.73m long, with ferrite core

PS/2 Mouse : HP
Model No. : M-S34
Serial No. : LZB90910464
FCC ID : DZL211029
BSMI : 4862A011
Power type : By PC
Power cord : Non-shielded, 1.88m long, No ferrite core

Modem : ACEEX
Model No. : XDM-56V14
FCC ID : IFAXDM-56V14
Power type : Linear
Power cord : Non-shielded, 1.9m length, No ferrite cord
Data cable : RS232, Shielded, 1.2m length, No ferrite core
RJ11C x 2, 7' length non-shielded, No ferrite core

USB Gamepad : Rockfire
Model No. : QF-337uv
Serial No. : KR91379759
FCC ID : None (CE approval)
BSMI : 3862A574
Power type : By computer
Data Cable : Shielded, 1.81m length, Plastic, with ferrite core

Notebook : **IBM Think Pad X20**

Model No. : 2662-11T

Serial No. : FX-1192200/09

FCC ID : N/A, Doc Approved

BSMI : 3892B565

Adaptor : **IBM**

Model No. : PA2450U

Serial No. : 02K6654

FCC ID : N/A, Doc Approved

Power type : I/P: 100 ~ 240Vac, 50 ~ 60 Hz, 0.5A ~ 1.2A
O/P: 16Vdc, 4.5A

Power cord : Non-shielded, 1.80m long, Plastic, with ferrite core


WLAN Card : **Gemtek Technology Co., Ltd.**

Model No. : C911003

FCC ID : MXF-C911003

1.5 Configuration of System Under Test


1.5.1 Conducted and Radiated for Unintentional

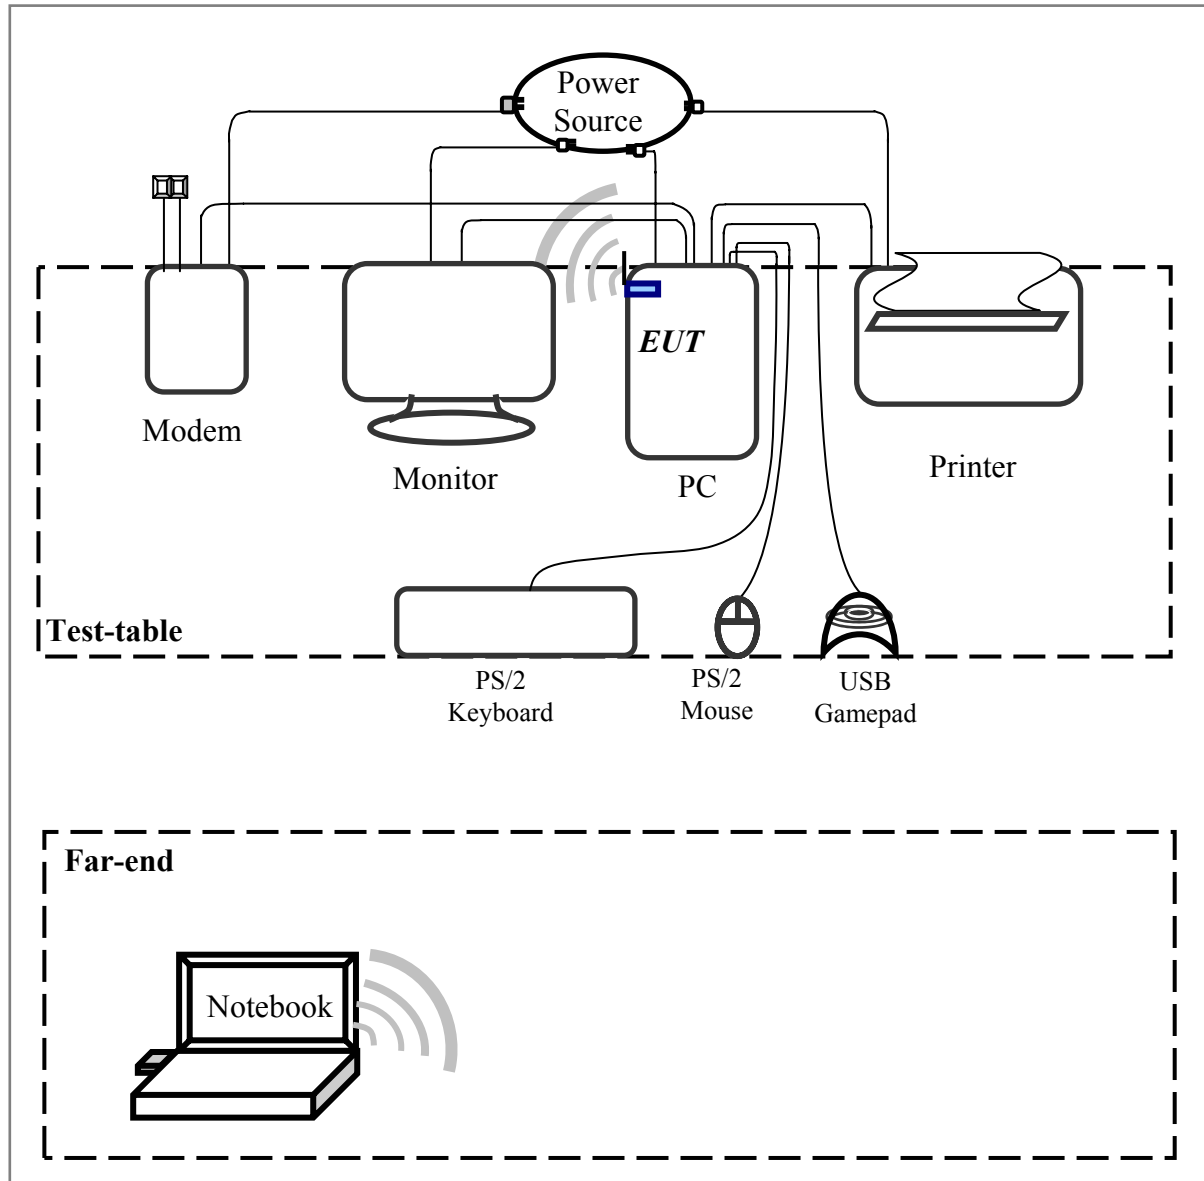

Connections of Computer:

- *Parallel Port --- a printer
- *Serial Port --- an external modem
- *PS/2 Port --- a PS/2 keyboard
- *PS/2 Port --- a PS/2 mouse
- *USB Port --- a USB gamepad
- *PCI Interface --- EUT

1.5.2 Radiated of Intentional

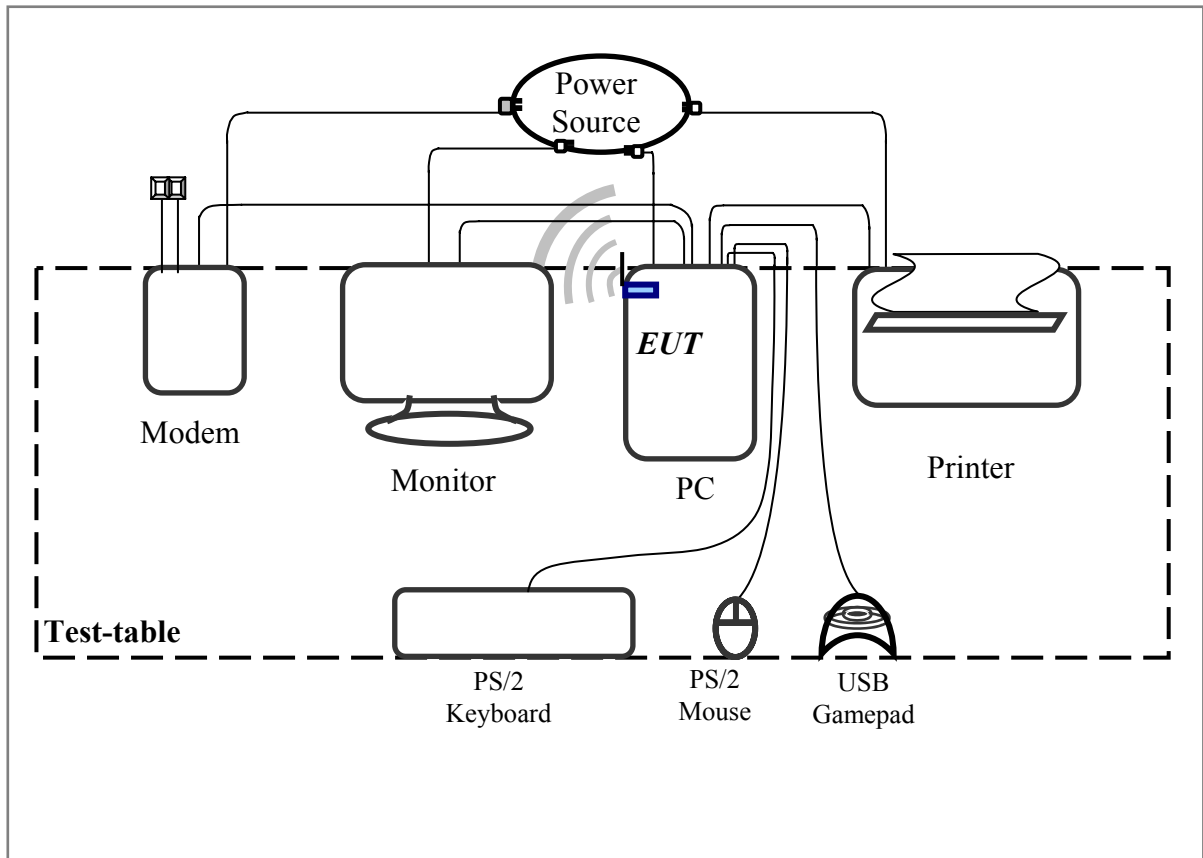

The tests below are carried with the EUT transmitter set at high power in TDD mode. The EUT is forced to select of output power level and channel number by PC.

The setting up procedure was recorded in 1.3 test method.

1.6 Verify the Frequency and Channel

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 1 | 2.412 GHz | 7 | 2.442 GHz |
| 2 | 2.417 GHz | 8 | 2.447 GHz |
| 3 | 2.422 GHz | 9 | 2.452 GHz |
| 4 | 2.427 GHz | 10 | 2.457 GHz |
| 5 | 2.432 GHz | 11 | 2.462 GHz |
| 6 | 2.437 GHz | | |

Note:

1. This is for confirming that all frequencies are in 2.412GHz to 2.462GHz.
2. Section 15.31(m): Measurements on intentional radiators or receivers shall be performed at three frequencies for operating frequency range over 10 MHz.
(The locations of these frequencies one near the top, one near the middle and one near the bottom.)
3. After test, the EUT operating frequencies are in 2.412GHz to 2.462GHz. So all the items as followed in testing report are need to test these three frequencies:
Top: Ch – 1; Middle: Ch – 6; Bottom: Ch – 11.

1.7 Test Procedure

All measurements contained in this report were performed mainly according to the techniques described in ANSI C63.4 (2003) and the pre-setup was written on 1.3 test method, the detail setup was written on each test item.

1.8 Location of the Test Site

The radiated emissions measurements required by the rules were performed on the **three-meter, Anechoic Chamber (FCC Registration Number: 93906)** maintained by *Training Research Co., Ltd.* 1F, No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Complete description and measurement data have been placed on file with the commission. The conducted power line emissions tests and other test items were performed in a anechoic chamber also located at Training Research Co., Ltd.

No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. *Training Research Co., Ltd.* is listed by the FCC as a facility available to do measurement work for others on a contract basis.

1.9 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests were chosen as that which produced the highest emission levels. However, only those conditions, which the EUT was considered likely to encounter in normal use were investigated.

In test, they were set in high power and continuously transmitting mode that controlled by computer. The CH01, CH06 and CH11 of EUT were all tested. The setting up procedure is recorded on 1.3 test method.

II. Section 15.101(a): Equipment authorization of unintentional radiators

The EUT equipped with a Protocol Control Information interface and should be operated with the computer. It was categorized to *Class B personal computers and peripherals* as cannot be operated stand-alone. The authorization requires **Declaration of Conformity (DoC)** and the items required such as Sect.15.107 (Conducted limits) and Section15.109 (Radiated emission limits) is same as Section15.207 and 15.247(C).

III. Section 15.203: Antenna requirement

The EUT has a detachable antenna, the detachable antenna is affixed to the EUT using a unique connector, which allows for replacement of a broken antenna, but does not use a standard antenna jack or electrical connector. The antenna requirement stated in Sect.15.203 is inapplicable to this EUT.

The antenna specification of list as follows, (Please Ref. to RF Exposure Calculations, antenna specification)

Detachable antenna

Manufacturer : WHA YU INDUSTRIAL CO., LTD.
Model : C056-510131-A, Rve:X1
Connector : SMA Plug Reverse
Antenna Type : Dipole Antenna
Antenna Gain : 1.8dBi (Max.)

VI. Section 15.207: Power Line Conducted Emissions for AC Powered Units

4.1 Test Condition & Setup

The power line conducted emission measurements were performed in an anechoic chamber. The EUT was assembled on a wooden table, which is 80 centimeters high, was placed 40 centimeters from the backwall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and Line Impedance Stabilization Networks (LISNs). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer (or EMI receiver) was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak and average detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150KHz to 30MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.3

There is a test condition apply in this test item, the test procedure description as <1.3>. Three channels were tested, one in the top (CH01), one in the middle (CH06), the other in bottom (CH11) and Supper 802.11g (only CH06).

4.2 List of Test Instruments

| Instrument Name | Model | Brand | Serial No. | Calibration Date |
|------------------------------|---------------------|--------------------|---------------------|------------------|
| | | | | Next time |
| EMI Receiver | 8546A | HP | 3520A00242 | 08/05/05 |
| RF Filter Section | 85460A | HP | 3448A00217 | 08/05/05 |
| LISN (EUT) | LISN-01 | TRC | 99-05 | 10/07/05 |
| LISN (Support E.) | LISN-01 | TRC | 9912-03, 04 | 11/04/05 |
| Pre-amplifier | 15542 ZFL-500 | Mini – Circuits | 0 0117 | 05/20/05 |
| 6dB Attenuator | MCL BW-S6W2 | Mini – Circuits | 9915 – Conducted | 05/20/05 |
| 10dB Attenuator | A5542 VAT010 | Mini – Circuits | 0215 – Conducted | 05/20/05 |
| Coaxial Cable (2 meter) | A30A30-0058-50FS-2M | Jyebao | SMA-08 | 05/20/05 |
| Coaxial Cable (1.1 meter) | A30A30-0058-50FS-1M | Jyebao | SMA-09 | 05/20/05 |
| Coaxial Cable (20 meter) | RG-214/U | Jyebao | NP-01 | 05/20/05 |
| Coaxial Cable (20 meter) | RG-214/U | Jyebao | NP-02 | 05/20/05 |
| Auto Switch Box (< 30MHz) | ASB-01 | TRC | 9904-01 | 05/20/05 |

4.3 Test Result of Power Line Conducted Emissions

The following table shows a summary of the highest emissions of power line conducted emissions on the LIVE and NETURAL conductors of the EUT power cord. Show as follows.

Test Conditions: Temperature : 25 °C Humidity : 73 % RH

Test mode: Standby mode

| <i>Power Connected Emissions</i> | | | | | <i>Class B</i> | | |
|----------------------------------|----------------------------|------------------------|----------------------|---------------------------|----------------------------|-----------------------------|------------------------|
| <i>Conductor</i> | <i>Frequency (KHz)</i> | <i>Peak (dBµV)</i> | <i>QP (dBµV)</i> | <i>Average (dBµV)</i> | <i>QP-limit (dBµV)</i> | <i>AVG-limit (dBµV)</i> | <i>Margin (dB)</i> |
| Line 1 | 159.000 | 32.25 | --- | --- | 65.74 | 55.74 | -23.49 |
| | 199.000 | 39.05 | --- | --- | 64.60 | 54.60 | -15.55 |
| | 297.000 | 28.16 | --- | --- | 61.80 | 51.80 | -23.64 |
| | 598.000 | 23.35 | --- | --- | 56.00 | 46.00 | -22.65 |
| | 1091.000 | 20.62 | --- | --- | 56.00 | 46.00 | -25.38 |
| | 2072.000 | 21.02 | --- | --- | 56.00 | 46.00 | -24.98 |
| | 7730.000 | 25.84 | --- | --- | 60.00 | 50.00 | -24.16 |
| | 13990.000 | 30.59 | --- | --- | 60.00 | 50.00 | -19.41 |
| Line 2 | 159.000 | 26.53 | --- | --- | 65.74 | 55.74 | -29.21 |
| | 197.000 | 34.75 | --- | --- | 64.66 | 54.66 | -19.91 |
| | 294.000 | 24.06 | --- | --- | 61.89 | 51.89 | -27.83 |
| | 592.000 | 23.85 | --- | --- | 56.00 | 46.00 | -22.15 |
| | 1490.000 | 21.28 | --- | --- | 56.00 | 46.00 | -24.72 |
| | 3381.000 | 21.58 | --- | --- | 56.00 | 46.00 | -24.42 |
| | 7330.000 | 25.84 | --- | --- | 60.00 | 50.00 | -24.16 |
| | 14320.000 | 31.87 | --- | --- | 60.00 | 50.00 | -18.13 |

NOTE:

- (1)Margin = Peak Amplitude – Limit, *The reading amplitudes are all under limit.*
- (2)A "+" sign in the margin column means the emission is OVER the Class B Limit and "-" sign of means UNDER the Class B limit

Test mode: IEEE 802.11b, Channel 1

| <i>Power Connected Emissions</i> | | | | | <i>Class B</i> | | |
|----------------------------------|------------------------|--------------------|------------------|-----------------------|------------------------|-------------------------|--------------------|
| <i>Conductor</i> | <i>Frequency (KHz)</i> | <i>Peak (dBμV)</i> | <i>QP (dBμV)</i> | <i>Average (dBμV)</i> | <i>QP-limit (dBμV)</i> | <i>AVG-limit (dBμV)</i> | <i>Margin (dB)</i> |
| Line 1 | 199.000 | 39.52 | --- | --- | 64.60 | 54.60 | -15.08 |
| | 297.000 | 29.09 | --- | --- | 61.80 | 51.80 | -22.71 |
| | 592.000 | 24.20 | --- | --- | 56.00 | 46.00 | -21.80 |
| | 7220.000 | 28.28 | --- | --- | 60.00 | 50.00 | -21.72 |
| | 7930.000 | 27.88 | --- | --- | 60.00 | 50.00 | -22.12 |
| | 14380.000 | 31.64 | --- | --- | 60.00 | 50.00 | -18.36 |
| Line 2 | 199.000 | 35.90 | --- | --- | 64.60 | 54.60 | -18.70 |
| | 592.000 | 25.72 | --- | --- | 56.00 | 46.00 | -20.28 |
| | 1477.000 | 21.48 | --- | --- | 56.00 | 46.00 | -24.52 |
| | 3741.000 | 22.41 | --- | --- | 56.00 | 46.00 | -23.59 |
| | 7530.000 | 25.56 | --- | --- | 60.00 | 50.00 | -24.44 |
| | 14380.000 | 31.41 | --- | --- | 60.00 | 50.00 | -18.59 |

Test mode: IEEE 802.11b, Channel 6

| <i>Power Connected Emissions</i> | | | | | <i>Class B</i> | | |
|----------------------------------|------------------------|--------------------|------------------|-----------------------|------------------------|-------------------------|--------------------|
| <i>Conductor</i> | <i>Frequency (KHz)</i> | <i>Peak (dBμV)</i> | <i>QP (dBμV)</i> | <i>Average (dBμV)</i> | <i>QP-limit (dBμV)</i> | <i>AVG-limit (dBμV)</i> | <i>Margin (dB)</i> |
| Line 1 | 197.000 | 39.24 | --- | --- | 64.66 | 54.66 | -15.42 |
| | 297.000 | 28.88 | --- | --- | 61.80 | 51.80 | -22.92 |
| | 592.000 | 23.42 | --- | --- | 56.00 | 46.00 | -22.58 |
| | 5940.000 | 36.45 | --- | --- | 60.00 | 50.00 | -13.55 |
| | 7080.000 | 42.36 | --- | --- | 60.00 | 50.00 | -7.64 |
| | 14380.000 | 30.96 | --- | --- | 60.00 | 50.00 | -19.04 |
| Line 2 | 197.000 | 34.54 | --- | --- | 64.66 | 54.66 | -20.12 |
| | 297.000 | 24.95 | --- | --- | 61.80 | 51.80 | -26.85 |
| | 592.000 | 24.34 | --- | --- | 56.00 | 46.00 | -21.66 |
| | 3349.000 | 23.02 | --- | --- | 56.00 | 46.00 | -22.98 |
| | 5180.000 | 29.83 | --- | --- | 60.00 | 50.00 | -20.17 |
| | 14380.000 | 31.15 | --- | --- | 60.00 | 50.00 | -18.85 |

Test mode: IEEE 802.11b, Channel 11

| <i>Power Connected Emissions</i> | | | | | <i>Class B</i> | | |
|----------------------------------|------------------------|--------------------|------------------|-----------------------|------------------------|-------------------------|--------------------|
| <i>Conductor</i> | <i>Frequency (KHz)</i> | <i>Peak (dBμV)</i> | <i>QP (dBμV)</i> | <i>Average (dBμV)</i> | <i>QP-limit (dBμV)</i> | <i>AVG-limit (dBμV)</i> | <i>Margin (dB)</i> |
| Line 1 | 199.000 | 39.30 | --- | --- | 64.60 | 54.60 | -15.30 |
| | 528.000 | 36.75 | --- | --- | 56.00 | 46.00 | -9.25 |
| | 1243.000 | 31.49 | --- | --- | 56.00 | 46.00 | -14.51 |
| | 1696.000 | 30.37 | --- | --- | 56.00 | 46.00 | -15.63 |
| | 5890.000 | 34.41 | --- | --- | 60.00 | 50.00 | -15.59 |
| | 15040.000 | 30.51 | --- | --- | 60.00 | 50.00 | -19.49 |
| Line 2 | 197.000 | 36.16 | --- | --- | 64.66 | 54.66 | -18.50 |
| | 471.000 | 34.13 | --- | --- | 56.83 | 46.83 | -12.70 |
| | 893.000 | 36.09 | --- | --- | 56.00 | 46.00 | -9.91 |
| | 1166.000 | 32.02 | --- | --- | 56.00 | 46.00 | -13.98 |
| | 1424.000 | 31.74 | --- | --- | 56.00 | 46.00 | -14.26 |
| | 14800.000 | 31.64 | --- | --- | 60.00 | 50.00 | -18.36 |

Test mode: IEEE 802.11g, Channel 1

| <i>Power Connected Emissions</i> | | | | | <i>Class B</i> | | |
|----------------------------------|------------------------|--------------------|------------------|-----------------------|------------------------|-------------------------|--------------------|
| <i>Conductor</i> | <i>Frequency (KHz)</i> | <i>Peak (dBμV)</i> | <i>QP (dBμV)</i> | <i>Average (dBμV)</i> | <i>QP-limit (dBμV)</i> | <i>AVG-limit (dBμV)</i> | <i>Margin (dB)</i> |
| Line 1 | 197.000 | 39.14 | --- | --- | 64.66 | 54.66 | -15.52 |
| | 236.000 | 36.85 | --- | --- | 63.54 | 53.54 | -16.69 |
| | 426.000 | 36.14 | --- | --- | 58.11 | 48.11 | -11.97 |
| | 674.000 | 31.91 | --- | --- | 56.00 | 46.00 | -14.09 |
| | 2872.000 | 24.08 | --- | --- | 56.00 | 46.00 | -21.92 |
| | 14580.000 | 30.73 | --- | --- | 60.00 | 50.00 | -19.27 |
| Line 2 | 195.000 | 38.34 | --- | --- | 64.71 | 54.71 | -16.37 |
| | 218.000 | 31.42 | --- | --- | 64.06 | 54.06 | -22.64 |
| | 622.000 | 32.60 | --- | --- | 56.00 | 46.00 | -13.40 |
| | 1123.000 | 33.65 | --- | --- | 56.00 | 46.00 | -12.35 |
| | 7220.000 | 26.58 | --- | --- | 60.00 | 50.00 | -23.42 |
| | 14380.000 | 30.89 | --- | --- | 60.00 | 50.00 | -19.11 |

Test mode: IEEE 802.11g, Channel 6

| <i>Power Connected Emissions</i> | | | | | <i>Class B</i> | | |
|----------------------------------|------------------------|--------------------|------------------|-----------------------|------------------------|-------------------------|--------------------|
| <i>Conductor</i> | <i>Frequency (KHz)</i> | <i>Peak (dBμV)</i> | <i>QP (dBμV)</i> | <i>Average (dBμV)</i> | <i>QP-limit (dBμV)</i> | <i>AVG-limit (dBμV)</i> | <i>Margin (dB)</i> |
| Line 1 | 199.000 | 39.61 | --- | --- | 64.60 | 54.60 | -14.99 |
| | 405.000 | 30.18 | --- | --- | 58.71 | 48.71 | -18.53 |
| | 645.000 | 26.14 | --- | --- | 56.00 | 46.00 | -19.86 |
| | 1049.000 | 30.81 | --- | --- | 56.00 | 46.00 | -15.19 |
| | 1854.000 | 34.15 | --- | --- | 56.00 | 46.00 | -11.85 |
| | 15940.000 | 31.60 | --- | --- | 60.00 | 50.00 | -18.40 |
| Line 2 | 199.000 | 35.61 | --- | --- | 64.60 | 54.60 | -18.99 |
| | 264.000 | 34.04 | --- | --- | 62.74 | 52.74 | -18.70 |
| | 919.000 | 29.72 | --- | --- | 56.00 | 46.00 | -16.28 |
| | 2179.000 | 29.30 | --- | --- | 56.00 | 46.00 | -16.70 |
| | 7330.000 | 25.42 | --- | --- | 60.00 | 50.00 | -24.58 |
| | 15190.000 | 31.04 | --- | --- | 60.00 | 50.00 | -18.96 |

Test mode: IEEE 802.11g, Channel 11

| <i>Power Connected Emissions</i> | | | | | <i>FCC Class B</i> | | |
|----------------------------------|------------------------|--------------------|------------------|-----------------------|------------------------|-------------------------|--------------------|
| <i>Conductor</i> | <i>Frequency (KHz)</i> | <i>Peak (dBμV)</i> | <i>QP (dBμV)</i> | <i>Average (dBμV)</i> | <i>QP-limit (dBμV)</i> | <i>AVG-limit (dBμV)</i> | <i>Margin (dB)</i> |
| Line 1 | 199.000 | 39.30 | --- | --- | 64.60 | 54.60 | -15.30 |
| | 461.000 | 35.40 | --- | --- | 57.11 | 47.11 | -11.71 |
| | 963.000 | 34.32 | --- | --- | 56.00 | 46.00 | -11.68 |
| | 1385.000 | 28.19 | --- | --- | 56.00 | 46.00 | -17.81 |
| | 3858.000 | 26.09 | --- | --- | 56.00 | 46.00 | -19.91 |
| | 14320.000 | 31.26 | --- | --- | 60.00 | 50.00 | -18.74 |
| Line 2 | 199.000 | 35.40 | --- | --- | 64.60 | 54.60 | -19.20 |
| | 352.000 | 30.55 | --- | --- | 60.23 | 50.23 | -19.68 |
| | 703.000 | 29.83 | --- | --- | 56.00 | 46.00 | -16.17 |
| | 841.000 | 26.28 | --- | --- | 56.00 | 46.00 | -19.72 |
| | 2506.000 | 35.74 | --- | --- | 56.00 | 46.00 | -10.26 |
| | 15940.000 | 31.76 | --- | --- | 60.00 | 50.00 | -18.24 |

V. Section 15.247 (a): Technical description of the EUT


Direct Sequence System is a spread spectrum system in which the carrier has been modulated by a high speed spreading code and an information data stream. The high speed code sequence dominates the “modulating function” and is the direct cause of the wide spreading of the transmitted signal. In the operational description demonstrates the operation principles of the Baseband processor employed by the EUT, shows that which is a complete DSSS baseband processor and meets the definition of the direct sequence spread spectrum system.

VI. Section 15.247(a)(2): Bandwidth for Direct Sequence System.

6.1 Test Condition & Setup

The transmitter bandwidth measurements were performed by the contact manner. The EUT was set to transmit continuously, also various channels were investigated to find the maximum occupied bandwidth. The output of the EUT was connected to the spectrum analyzer. The bandwidth of the fundamental frequency is observed by the spectrum analyzer with 100kHz RBW and 100kHz VBW.

6.2 Test Instruments Configuration

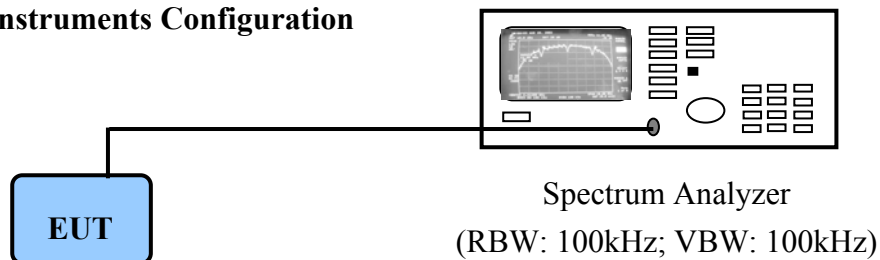

PC to control the EUT at maximal power output and channel number and set antenna kit

6.3 List of Test Instruments


| Instrument Name | Model No. | Brand | Serial No. | Next time |
|-------------------|-----------|---------|------------|-----------|
| Spectrum Analyzer | MS2665C | ANRITSU | 6200175476 | 11/02/05 |

6.4 Test Result of Bandwidth


| Channel | 802.11b | 802.11g |
|---------|-----------|-----------|
| 01 | 11.28 MHz | 16.80 MHz |
| 06 | 11.28 MHz | 16.84 MHz |
| 11 | 11.36 MHz | 16.84 MHz |

- Note:
- The data in the above table are summarizing the following attachment spectrum analyzer hard copy. According to the guidance, we'd made the measurement with the spectrum analyzer's resolution bandwidth (RBW)=100kHz and set the $span \gg RBW$. The results show the measured 6dB bandwidth comply with the minimum 500kHz requirement.
 - The attachments show these on the following pages.

6dB Bandwidth of Channel 1 (The minimum 6dB BW at least 500kHz)

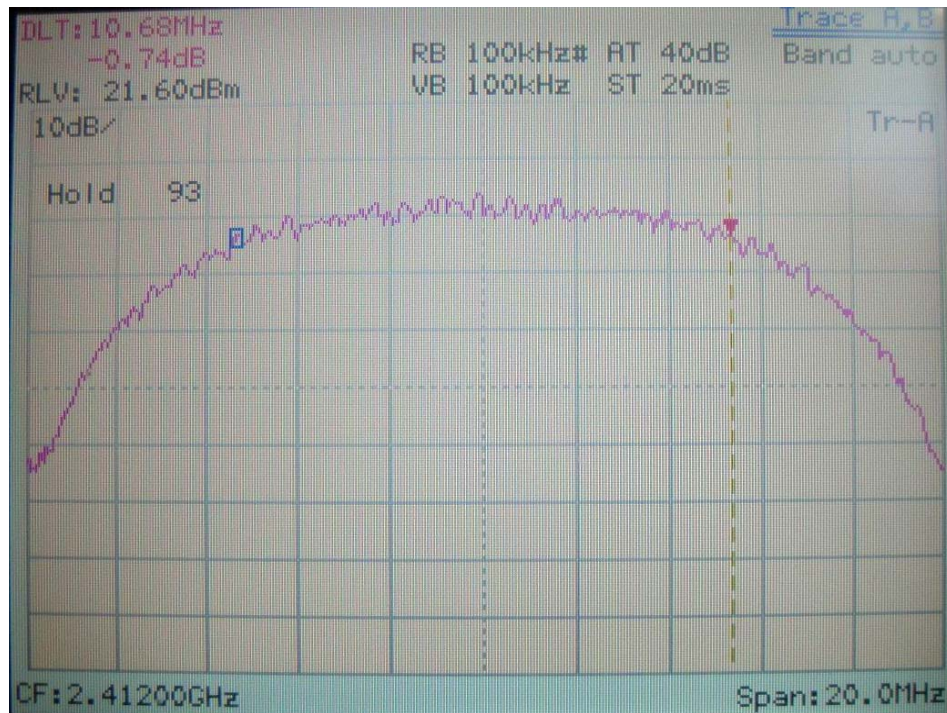


IEEE 802.11b

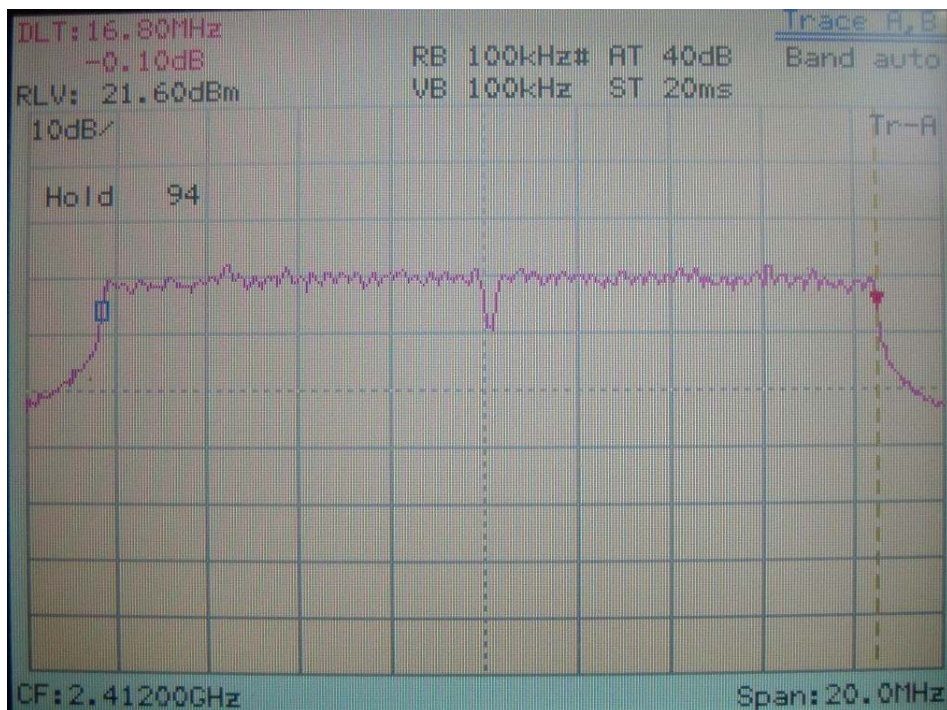


IEEE 802.11g

6dB Bandwidth of Channel 6 (The minimum 6dB BW at least 500kHz)

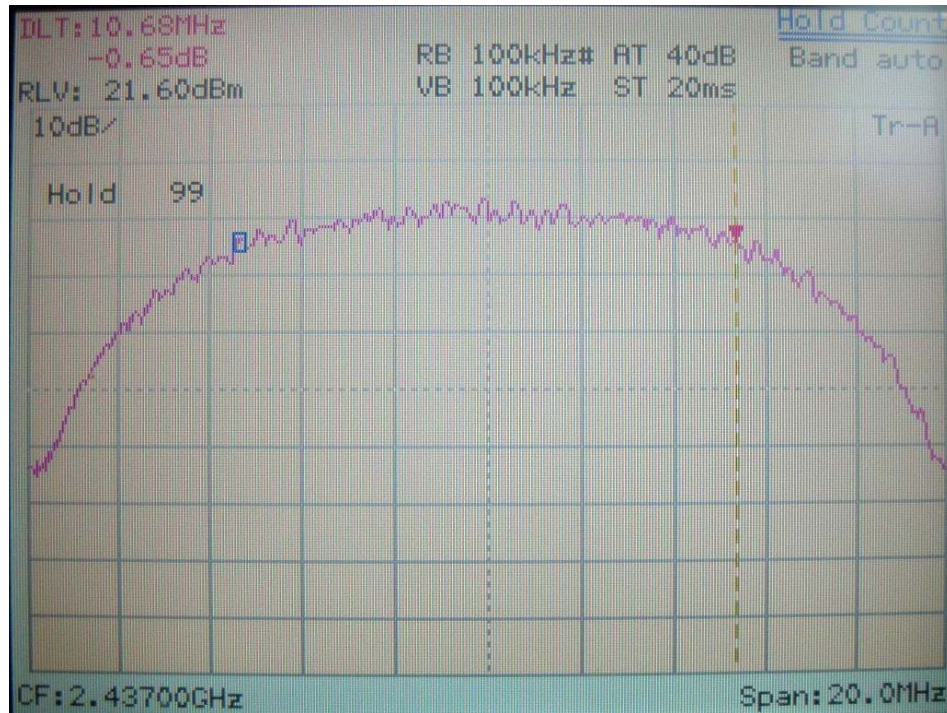

IEEE 802.11b

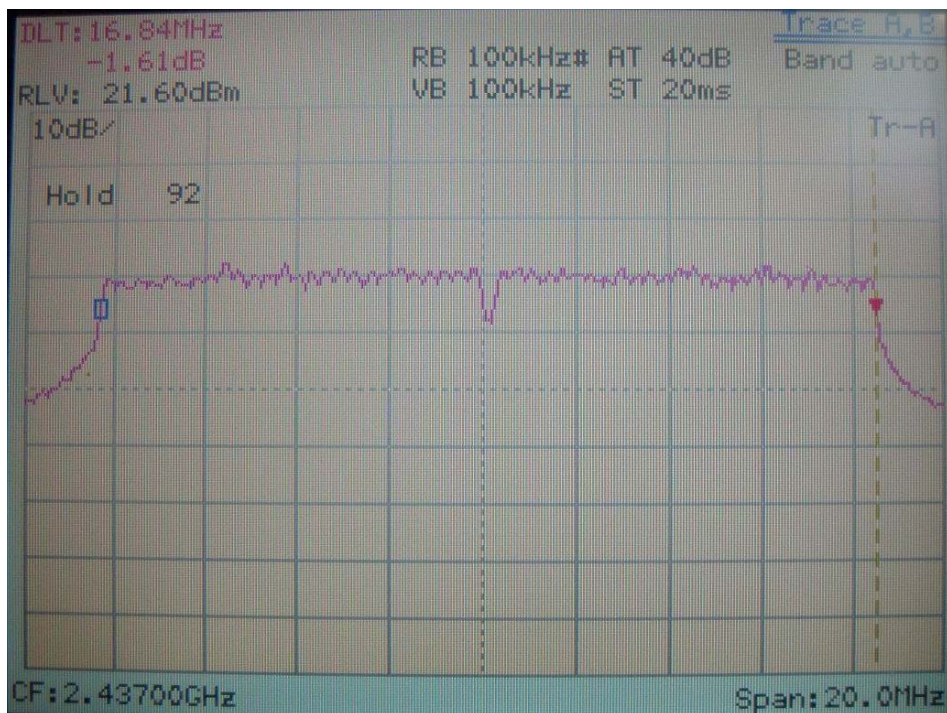


IEEE 802.11g

6dB Bandwidth of Channel 11 (The minimum 6dB BW at least 500kHz)




IEEE 802.11b

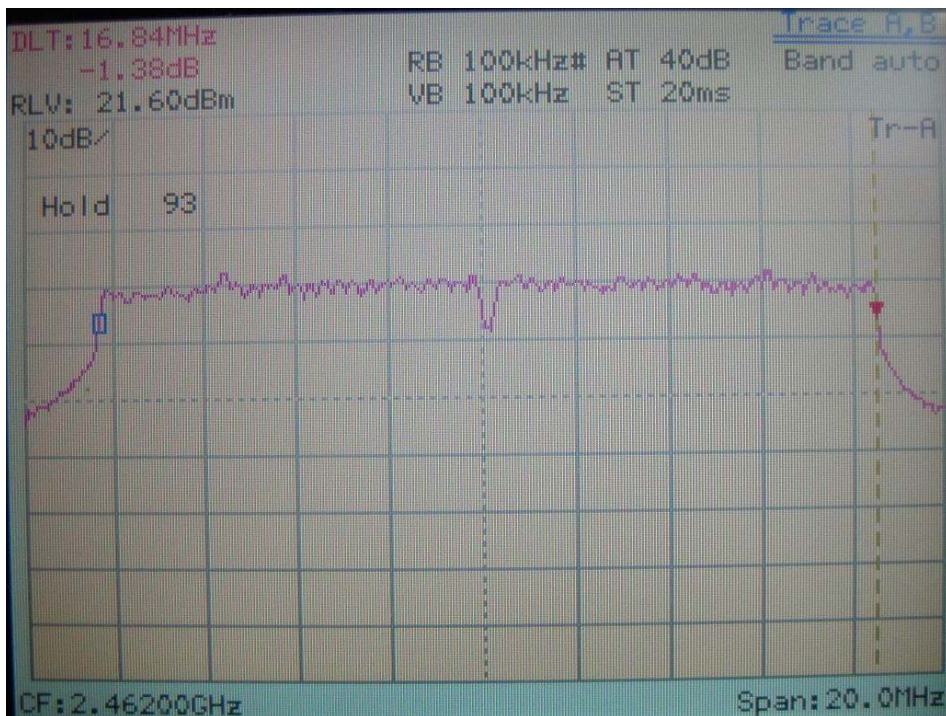

IEEE 802.11g

VII. Section 15.247(b): Power Output

7.1 Test Condition & Setup



1. The output of the transmitter is connected to the BOONTON RF Power Meter.
2. The calibration is performed before every test. The values of the output power of the EUT will shown in the dBm directly are the transmitter output peak power. Recording as follows.

7.2 List of Test Instruments

| Instrument Name | Model No. | Brand | Serial No. | Next time |
|-------------------|-----------|---------|------------|-----------|
| RF Power Meter | 4532 | BOONTON | 117501 | 04/16/05 |
| Peak Power Sensor | 57340 | BOONTON | 2698 | 04/16/05 |

7.3 Test Result

Formula:
 $RF\ Output\ of\ EUT + |Cable\ Loss| = Output\ Peak\ Power$

| Channel | RF Output | Cable Loss | Output Peak Power | |
|---------------|-----------|------------|-------------------|-------|
| | dBm | dBm | dBm | mW |
| 802.11b CH 01 | 17.22 | 0.60 | 17.82 | 60.53 |
| 802.11b CH 06 | 17.07 | 0.60 | 17.67 | 58.48 |
| 802.11b CH 11 | 16.95 | 0.60 | 17.55 | 56.89 |
| 802.11g CH 01 | 17.53 | 0.60 | 18.13 | 65.01 |
| 802.11g CH 06 | 17.16 | 0.60 | 17.76 | 59.70 |
| 802.11g CH 11 | 16.91 | 0.60 | 17.51 | 56.36 |

VIII. Section 15.247 (C): Spurious Emissions (Radiated)

8.1 Test Condition & Setup

We'd performed the test by the *radiated emission* skill: The EUT was placed in an anechoic chamber, and set the EUT transmitting continuously and scanned at 3-meter distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration, which produced the highest emissions was noted so it could be reproduced later during the final tests. For the measurement above 1GHz, according to the guidance we'd set the spectrum analyzer's 6dB bandwidth RBW to 1MHz.

This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT.

Final radiation measurements were made on a three-meter, anechoic chamber. The EUT system was placed on a nonconductive turntable, which is 0.8 meters height, top surface 1.0 x 1.5 meter.

The spectrum was examined from 30 MHz to 1000 MHz using an Hewlett Packard 85460A EMI Receiver, SCHWARZECK whole range Small Biconical Antenna (Model No.: UBAA9114 & BBVU9135) is used to measure frequency from 30 MHz to 1GHz. The final test is used the HP 85460A spectrum and 8564E spectrum was examined from 1GHz to 25GHz using an Hewlett Packard Spectrum Analyzer, EMCO/HP Horn Antenna (Model 3115 / 84125-80008) for 1G - 25GHz.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. There are two spectrum analyzers use on this testing, HP 85460A for frequency 30MHz to 1000MHz, and 8564E for frequency 1GHz to 25GHz. No post-detector video filters were used in the test. The spectrum analyzer's 6dB bandwidth was set to 120KHz (spectrum was examined from 30 MHz to 1000 MHz), the spectrum analyzer's 6 dB bandwidth was set to 1 MHz (spectrum was examined from 1GHz to 25GHz) and the analyzer was operated in the maximum hold mode. There is a test condition applies in this test item, the test procedure description as the following:

Three channels were tested, one in the top (CH01), one in the middle (CH06), the other in bottom (CH11) and super 11g (only CH06). The setting up procedure is recorded on <1.3>

With the transmitter operating from a AC source and using the internal of EUT, radiates spurious emissions falling within the restricted bands of 15.209 were measured at operating frequencies corresponding to upper, middle and bottom channels in the 2400 ~ 2483.5 MHz band.

The actual field intensity in decibels referenced to 1 microvolt per meter (dB μ V/m) is determined by algebraically adding the measured reading in dB μ V, the antenna factor (dB), and cable loss (dB) at the appropriate frequency. Since the EUT was set to transmit continuously, no *duty cycle* is present.

For frequency between 30MHz to 1000MHz

$$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factors}$$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

Correction Factors = Antenna Factor + Cable Loss – Amplifier Gain + Switching Box Loss

For frequency between 1GHz to 25GHz

$$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factor}$$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

Correction Factors = Antenna Factor + Cable Loss – Amplifier Gain + Switching Box Loss

8.2 List of Test Instruments

| Instrument Name | Model | Brand | Serial No. | Calibration Date |
|---|----------------------|------------|------------|------------------|
| | | | | Next time |
| EMI Receiver | 8546A | HP | 3520A00242 | 08/05/05 |
| RF Filter Section | 85460A | HP | 3448A00217 | 08/05/05 |
| Small Biconical Antenna | UBAA9114 & BBVU9135 | SCHWARZECK | 127 | 10/11/05 |
| Pre-amplifier | PA1F | TRC | 1FAC | 05/20/05 |
| Auto Switch Box (>30MHz) | ASB-01 | TRC | 9904-01 | 05/20/05 |
| Coaxial Cable (Double shielded, 15 meter) | A30A30-0058-50FS-15M | JYEBAO | SMA-01 | 05/20/05 |
| Coaxial Cable (1.1 meter) | A30A30-0058-50FS-1M | JYEBAO | SMA-02 | 05/20/05 |
| Spectrum Analyzer | 8564E | HP | 3720A00840 | 08/13/05 |
| Microwave Preamplifier | 84125C | HP | US36433002 | 08/13/05 |
| Horn Antenna | 3115 | EMCO | 9104-3668 | 12/27/05 |
| Standard Guide Horn Antenna | 84125-80008 | HP | 18-26.5GHz | 10/15/05 |
| Standard Guide Horn Antenna | 84125-80001 | HP | 26.5-40GHz | 10/15/05 |
| Horn Antenna | 1196E (3115) | HP (EMCO) | 9704-5178 | 01/11/06 |
| Pre-amplifier | PA2F | TRC | 2F1GZ | 03/20/05 |
| Coaxial Cable (3 miter) | A30A30-0058-50FST118 | JYEBAO | MSA-05 | 03/20/05 |
| Coaxial Cable (1 meter) | A30A30-0058-50FST118 | JYEBAO | MSA-04 | 03/20/05 |

8.3 Test Result of Spurious Radiated Emissions

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarizations, EUT orientation, etc. are recorded on the following.

Test Conditions: Temperature : 25 °C Humidity : 73 % RH

Test mode: Standby mode for 30MHz to 1GHz [Horizontal]

| Radiated Emission | | | | Correction Factors (dB) | Corrected Amplitude (dBµV/m) | Class B (3 m) | |
|-------------------|------------------|-------------|-----------|----------------------------|---------------------------------|------------------|-------------|
| Frequency (MHz) | Amplitude (dBµV) | Ant. H. (m) | Table () | | | Limit (dBµV/m) | Margin (dB) |
| 39.70 | 26.26 | 1.00 | 343 | 5.83 | 32.09 | 40.00 | -7.91 |
| 77.29 | 27.67 | 1.00 | 156 | 0.48 | 28.15 | 40.00 | -11.85 |
| 146.40 | 27.11 | 1.00 | 124 | -3.04 | 24.07 | 43.50 | -19.43 |
| 202.17 | 31.38 | 1.00 | 115 | -3.83 | 27.55 | 43.50 | -15.95 |
| 231.27 | 29.59 | 1.00 | 107 | -4.08 | 25.51 | 46.00 | -20.49 |
| 436.19 | 26.47 | 1.00 | 161 | 0.45 | 26.92 | 46.00 | -19.08 |

Test mode: Standby mode for 30MHz to 1GHz [Vertical]

| Radiated Emission | | | | Correction Factors (dB) | Corrected Amplitude (dBµV/m) | Class B (3 m) | |
|-------------------|------------------|-------------|-----------|----------------------------|---------------------------------|------------------|-------------|
| Frequency (MHz) | Amplitude (dBµV) | Ant. H. (m) | Table () | | | Limit (dBµV/m) | Margin (dB) |
| 39.70 | 25.49 | 1.00 | 233 | 5.83 | 31.32 | 40.00 | -8.68 |
| 202.17 | 25.51 | 1.00 | 282 | -3.83 | 21.68 | 43.50 | -21.82 |
| 288.26 | 31.42 | 1.00 | 328 | -3.80 | 27.62 | 46.00 | -18.38 |
| 398.60 | 25.26 | 1.00 | 346 | -1.05 | 24.21 | 46.00 | -21.79 |
| 436.19 | 26.81 | 1.00 | 225 | 0.45 | 27.26 | 46.00 | -18.74 |
| 528.34 | 25.50 | 1.00 | 193 | 4.10 | 29.60 | 46.00 | -16.40 |

Note:

1. Margin = Amplitude – Limit, if margin is minus means under limit.
2. Corrected Amplitude = Reading Amplitude + Correction Factors
3. Correction Factor = Antenna factor + (Cable Loss – Amplitude gain) + Switching Box Loss

Test mode: Standby mode for 1GHz to 25GHz [Horizontal]

| Frequency | Ant. H. | Table | Amplitude | | Correction Factor | Corrected Amplitude | | Limit | | Margin |
|-----------|------------|--------|-------------|-----|----------------------|------------------------|-----|-------------|-------|--------|
| | | | Peak / Ave. | | | Peak / Ave. | | Peak / Ave. | | |
| MHz | m | degree | dBµV | | dB/m | dBµV/m | | dBµV/m | | dB |
| 1587.92 | 1.00 | 210 | 37.41 | --- | 0.28 | 37.69 | --- | 73.96 | 53.96 | -16.27 |
| 3351.67 | 1.00 | 94 | 31.07 | --- | 10.03 | 41.10 | --- | 73.96 | 53.96 | -12.86 |
| 5561.67 | 1.00 | 310 | 28.07 | --- | 17.10 | 45.17 | --- | 73.96 | 53.96 | -8.79 |
| 9429.17 | 1.00 | 206 | 22.91 | --- | 23.06 | 45.97 | --- | 73.96 | 53.96 | -7.99 |
| 22044.58 | 1.00 | 160 | 48.15 | --- | 2.73 | 50.88 | --- | 73.96 | 53.96 | -3.08 |
| 24236.87 | 1.00 | 75 | 47.32 | --- | 2.88 | 50.20 | --- | 73.96 | 53.96 | -3.76 |

Test mode: Standby mode for 1GHz to 25GHz [Vertical]

| Frequency | Ant. H. | Table | Amplitude | | Correction Factor | Corrected Amplitude | | Limit | | Margin |
|-----------|------------|--------|-------------|-----|----------------------|------------------------|-----|-------------|-------|--------|
| | | | Peak / Ave. | | | Peak / Ave. | | Peak / Ave. | | |
| MHz | m | degree | dBµV | | dB/m | dBµV/m | | dBµV/m | | dB |
| 1495.83 | 1.00 | 242 | 40.57 | --- | 0.02 | 40.59 | --- | 73.96 | 53.96 | -13.37 |
| 2947.92 | 1.00 | 325 | 30.91 | --- | 9.07 | 39.98 | --- | 73.96 | 53.96 | -13.98 |
| 5653.75 | 1.00 | 215 | 26.74 | --- | 17.35 | 44.09 | --- | 73.96 | 53.96 | -9.87 |
| 9429.17 | 1.00 | 253 | 25.74 | --- | 23.06 | 48.80 | --- | 73.96 | 53.96 | -5.16 |
| 22373.96 | 1.00 | 353 | 46.99 | --- | 3.48 | 50.47 | --- | 73.96 | 53.96 | -3.49 |
| 24502.50 | 1.00 | 279 | 48.82 | --- | 2.31 | 51.13 | --- | 73.96 | 53.96 | -2.83 |

Note:

1. Margin = Corrected - Limit.
2. The EUT utilizes a *permanently attached antenna*. In addition the spurious RF radiated emissions levels do comply with the *20dBc limit* both at its bandedges and other spurious emissions.
3. As stated in Section 15.35(b), for any frequencies above 1000MHz, radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. As the results of our test, the peak amplitudes are already below the FCC limit. Thus the average amplitudes of the rest are omitted.

Test mode: IEEE 802.11b CH01 for 30MHz to 1GHz [Horizontal]

| <i>Radiated Emission</i> | | | | <i>Correction Factors</i> | <i>Corrected Amplitude</i> | <i>Class B (3 m)</i> | |
|--------------------------|--|--------------------|------------------|---------------------------|----------------------------|--------------------------------------|--------------------|
| <i>Frequency (MHz)</i> | <i>Amplitude (dBμV)</i> | <i>Ant. H. (m)</i> | <i>Table ()</i> | | | <i>Limit (dBμV/m)</i> | <i>Margin (dB)</i> |
| 39.70 | 23.81 | 1.00 | 325 | 5.83 | 29.64 | 40.00 | -10.36 |
| 77.29 | 27.41 | 1.00 | 314 | 0.48 | 27.89 | 40.00 | -12.11 |
| 146.40 | 25.03 | 1.00 | 112 | -3.04 | 21.99 | 43.50 | -21.51 |
| 202.17 | 30.86 | 1.00 | 107 | -3.83 | 27.03 | 43.50 | -16.47 |
| 231.27 | 28.91 | 1.00 | 89 | -4.08 | 24.83 | 46.00 | -21.17 |
| 436.19 | 27.22 | 1.00 | 132 | 0.45 | 27.67 | 46.00 | -18.33 |

Test mode: IEEE 802.11b CH01 for 30MHz to 1GHz [Vertical]

| <i>Radiated Emission</i> | | | | <i>Correction Factors</i> | <i>Corrected Amplitude</i> | <i>Class B (3 m)</i> | |
|--------------------------|--|--------------------|------------------|---------------------------|----------------------------|--------------------------------------|--------------------|
| <i>Frequency (MHz)</i> | <i>Amplitude (dBμV)</i> | <i>Ant. H. (m)</i> | <i>Table ()</i> | | | <i>Limit (dBμV/m)</i> | <i>Margin (dB)</i> |
| 39.70 | 26.65 | 1.00 | 271 | 5.83 | 32.48 | 40.00 | -7.52 |
| 99.11 | 27.94 | 1.00 | 262 | -1.15 | 26.79 | 43.50 | -16.71 |
| 288.26 | 30.92 | 1.00 | 141 | -3.80 | 27.12 | 46.00 | -18.88 |
| 434.97 | 27.18 | 1.00 | 236 | 0.41 | 27.59 | 46.00 | -18.41 |
| 528.34 | 25.91 | 1.00 | 203 | 4.10 | 30.01 | 46.00 | -15.99 |
| 616.85 | 24.72 | 1.00 | 3 | 7.27 | 31.99 | 46.00 | -14.01 |

Test mode: IEEE 802.11b CH01 for 1GHz to 25GHz [Horizontal]

| Frequency | Ant. H. | Table | Amplitude | | Correction Factor | Corrected Amplitude | | Limit | | Margin |
|-----------|------------|--------|-------------|-----|----------------------|------------------------|-----|-------------|-------|--------|
| | | | Peak / Ave. | | | Peak / Ave. | | Peak / Ave. | | |
| MHz | m | degree | dBµV | | dB/m | dBµV/m | | dBµV/m | | dB |
| 2122.92 | 1.00 | 105 | 35.50 | --- | 8.43 | 43.93 | --- | 73.96 | 53.96 | -10.03 |
| 4823.12 | 1.00 | 130 | 43.44 | --- | 3.76 | 47.20 | --- | 73.96 | 53.96 | -6.76 |
| 7233.75 | 1.00 | 114 | 35.94 | --- | 10.07 | 46.01 | --- | 73.96 | 53.96 | -7.95 |
| 9650.42 | 1.00 | 263 | 34.61 | --- | 11.47 | 46.08 | --- | 73.96 | 53.96 | -7.88 |
| 12061.04 | 1.00 | 110 | 37.44 | --- | 9.81 | 47.25 | --- | 73.96 | 53.96 | -6.71 |
| 21708.12 | 1.00 | 171 | 46.66 | --- | 2.87 | 49.53 | --- | 73.96 | 53.96 | -4.43 |

Test mode: IEEE 802.11b CH01 for 1GHz to 25GHz [Vertical]

| Frequency | Ant. H. | Table | Amplitude | | Correction Factor | Corrected Amplitude | | Limit | | Margin |
|-----------|------------|--------|-------------|-------|----------------------|------------------------|-------|-------------|-------|--------|
| | | | Peak / Ave. | | | Peak / Ave. | | Peak / Ave. | | |
| MHz | m | degree | dBµV | | dB/m | dBµV/m | | dBµV/m | | dB |
| 2279.98 | 1.00 | 13 | 46.50 | 41.00 | 8.87 | 55.37 | 49.87 | 73.96 | 53.96 | -4.09 |
| 2359.98 | 1.00 | 23 | 46.99 | 40.17 | 9.10 | 56.09 | 49.27 | 73.96 | 53.96 | -4.69 |
| 2464.74 | 1.00 | 243 | 46.67 | 35.17 | 9.39 | 56.06 | 44.56 | 73.96 | 53.96 | -9.40 |
| 2534.40 | 1.00 | 13 | 46.84 | 36.17 | 9.55 | 56.39 | 45.72 | 73.96 | 53.96 | -8.24 |
| 12061.04 | 1.00 | 99 | 38.27 | --- | 9.81 | 48.08 | --- | 73.96 | 53.96 | -5.88 |
| 24120.00 | 1.00 | 223 | 45.99 | --- | 3.40 | 49.39 | --- | 73.96 | 53.96 | -4.57 |

Test mode: IEEE 802.11b CH06 for 30MHz to 1GHz [Horizontal]

| Radiated Emission | | | | Correction Factors | Corrected Amplitude | Class B (3 m) | |
|--------------------------|-------------------------|--------------------|------------------|---------------------------|----------------------------|-----------------------|--------------------|
| Frequency (MHz) | Amplitude (dBμV) | Ant. H. (m) | Table () | | | Limit (dBμV/m) | Margin (dB) |
| 39.70 | 23.48 | 1.00 | 87 | 5.83 | 29.31 | 40.00 | -10.69 |
| 73.65 | 26.96 | 1.00 | 148 | 0.91 | 27.87 | 40.00 | -12.13 |
| 146.40 | 26.96 | 1.00 | 107 | -3.04 | 23.92 | 43.50 | -19.58 |
| 202.17 | 30.31 | 1.00 | 116 | -3.83 | 26.48 | 43.50 | -17.02 |
| 231.27 | 29.05 | 1.00 | 116 | -4.08 | 24.97 | 46.00 | -21.03 |
| 434.97 | 26.72 | 1.00 | 163 | 0.41 | 27.13 | 46.00 | -18.87 |

Test mode: IEEE 802.11b CH06 for 30MHz to 1GHz [Vertical]

| Radiated Emission | | | | Correction Factors | Corrected Amplitude | Class B (3 m) | |
|--------------------------|-------------------------|--------------------|------------------|---------------------------|----------------------------|-----------------------|--------------------|
| Frequency (MHz) | Amplitude (dBμV) | Ant. H. (m) | Table () | | | Limit (dBμV/m) | Margin (dB) |
| 39.70 | 28.61 | 1.00 | 228 | 5.83 | 34.44 | 40.00 | -5.56 |
| 100.32 | 27.82 | 1.00 | 153 | -1.24 | 26.58 | 43.50 | -16.92 |
| 288.26 | 30.80 | 1.00 | 55 | -3.80 | 27.00 | 46.00 | -19.00 |
| 434.97 | 27.22 | 1.00 | 233 | 0.41 | 27.63 | 46.00 | -18.37 |
| 528.34 | 26.00 | 1.00 | 187 | 4.10 | 30.10 | 46.00 | -15.90 |
| 616.85 | 24.93 | 1.00 | 12 | 7.27 | 32.20 | 46.00 | -13.80 |

Test mode: IEEE 802.11b CH06 for 1GHz to 25GHz [Horizontal]

| <i>Frequency</i> | <i>Ant. H.</i> | <i>Table</i> | <i>Amplitude</i> | | <i>Correction Factor</i> | <i>Corrected Amplitude</i> | | <i>Limit</i> | | <i>Margin</i> |
|------------------|--------------------|---------------|--------------------|-----|------------------------------|--------------------------------|-----|--------------------|-------|---------------|
| | | | <i>Peak / Ave.</i> | | | <i>Peak / Ave.</i> | | <i>Peak / Ave.</i> | | |
| <i>MHz</i> | <i>m</i> | <i>degree</i> | <i>dBμV</i> | | <i>dB/m</i> | <i>dBμV/m</i> | | <i>dBμV/m</i> | | <i>dB</i> |
| 2297.92 | 1.00 | 63 | 38.00 | --- | 8.92 | 46.92 | --- | 73.96 | 53.96 | -7.04 |
| 4871.46 | 1.00 | 147 | 43.27 | --- | 3.95 | 47.22 | --- | 73.96 | 53.96 | -6.74 |
| 9747.08 | 1.00 | 215 | 34.94 | --- | 11.89 | 46.83 | --- | 73.96 | 53.96 | -7.13 |
| 12187.92 | 1.00 | 355 | 39.44 | --- | 9.74 | 49.18 | --- | 73.96 | 53.96 | -4.78 |
| 21934.79 | 1.00 | 121 | 46.32 | --- | 3.09 | 49.41 | --- | 73.96 | 53.96 | -4.55 |
| 24371.46 | 1.00 | 211 | 47.83 | --- | 3.26 | 51.09 | --- | 73.96 | 53.96 | -2.87 |

Test mode: IEEE 802.11b CH06 for 1GHz to 25GHz [Vertical]

| <i>Frequency</i> | <i>Ant. H.</i> | <i>Table</i> | <i>Amplitude</i> | | <i>Correction Factor</i> | <i>Corrected Amplitude</i> | | <i>Limit</i> | | <i>Margin</i> |
|------------------|--------------------|---------------|--------------------|-------|------------------------------|--------------------------------|-------|--------------------|-------|---------------|
| | | | <i>Peak / Ave.</i> | | | <i>Peak / Ave.</i> | | <i>Peak / Ave.</i> | | |
| <i>MHz</i> | <i>m</i> | <i>degree</i> | <i>dBμV</i> | | <i>dB/m</i> | <i>dBμV/m</i> | | <i>dBμV/m</i> | | <i>dB</i> |
| 2311.25 | 1.00 | 2 | 47.34 | 36.00 | 8.96 | 56.30 | 44.96 | 73.96 | 53.96 | -9.00 |
| 2359.97 | 1.00 | 45 | 46.49 | 40.67 | 9.10 | 55.59 | 49.77 | 73.96 | 53.96 | -4.19 |
| 2519.99 | 1.00 | 35 | 46.83 | 37.83 | 9.53 | 56.36 | 47.36 | 73.96 | 53.96 | -6.60 |
| 2559.99 | 1.00 | 1 | 46.84 | 39.17 | 9.60 | 56.44 | 48.77 | 73.96 | 53.96 | -5.19 |
| 9747.08 | 1.00 | 153 | 35.77 | --- | 11.89 | 47.66 | --- | 73.96 | 53.96 | -6.30 |
| 12187.92 | 1.00 | 130 | 38.44 | --- | 9.74 | 48.18 | --- | 73.96 | 53.96 | -5.78 |

Test mode: IEEE 802.11b CH11 for 30MHz to 1GHz [Horizontal]

| Radiated Emission | | | | Correction Factors | Corrected Amplitude | Class B (3 m) | |
|--------------------------|-------------------------|--------------------|------------------|---------------------------|----------------------------|-----------------------|--------------------|
| Frequency (MHz) | Amplitude (dBμV) | Ant. H. (m) | Table () | | | Limit (dBμV/m) | Margin (dB) |
| 39.70 | 22.55 | 1.00 | 130 | 5.83 | 28.38 | 40.00 | -11.62 |
| 77.29 | 28.25 | 1.00 | 170 | 0.48 | 28.73 | 40.00 | -11.27 |
| 146.40 | 26.10 | 1.00 | 115 | -3.04 | 23.06 | 43.50 | -20.44 |
| 200.96 | 30.73 | 1.00 | 124 | -3.82 | 26.91 | 43.50 | -16.59 |
| 230.06 | 29.45 | 1.00 | 107 | -4.09 | 25.36 | 46.00 | -20.64 |
| 434.97 | 27.24 | 1.00 | 141 | 0.41 | 27.65 | 46.00 | -18.35 |

Test mode: IEEE 802.11b CH11 for 30MHz to 1GHz [Vertical]

| Radiated Emission | | | | Correction Factors | Corrected Amplitude | Class B (3 m) | |
|--------------------------|-------------------------|--------------------|------------------|---------------------------|----------------------------|-----------------------|--------------------|
| Frequency (MHz) | Amplitude (dBμV) | Ant. H. (m) | Table () | | | Limit (dBμV/m) | Margin (dB) |
| 39.70 | 25.04 | 1.00 | 282 | 5.83 | 30.87 | 40.00 | -9.13 |
| 99.11 | 28.41 | 1.00 | 285 | -1.15 | 27.26 | 43.50 | -16.24 |
| 157.31 | 27.56 | 1.00 | 124 | -3.38 | 24.18 | 43.50 | -19.32 |
| 288.26 | 31.30 | 1.00 | 29 | -3.80 | 27.50 | 46.00 | -18.50 |
| 434.97 | 26.46 | 1.00 | 228 | 0.41 | 26.87 | 46.00 | -19.13 |
| 528.34 | 25.68 | 1.00 | 206 | 4.10 | 29.78 | 46.00 | -16.22 |

Test mode: IEEE 802.11b CH11 for 1GHz to 25GHz [Horizontal]

| <i>Frequency</i> | <i>Ant. H.</i> | <i>Table</i> | <i>Amplitude</i> | | <i>Correction Factor</i> | <i>Corrected Amplitude</i> | | <i>Limit</i> | | <i>Margin</i> |
|------------------|--------------------|---------------|--------------------|-----|------------------------------|--------------------------------|-----|--------------------|-------|---------------|
| | | | <i>Peak / Ave.</i> | | | <i>Peak / Ave.</i> | | <i>Peak / Ave.</i> | | |
| <i>MHz</i> | <i>m</i> | <i>degree</i> | <i>dBμV</i> | | <i>dB/m</i> | <i>dBμV/m</i> | | <i>dBμV/m</i> | | <i>dB</i> |
| 2314.58 | 1.00 | 71 | 37.67 | --- | 8.97 | 46.64 | --- | 73.96 | 53.96 | -7.32 |
| 4925.83 | 1.00 | 152 | 45.77 | --- | 4.13 | 49.90 | --- | 73.96 | 53.96 | -4.06 |
| 9849.79 | 1.00 | 17 | 35.28 | --- | 11.93 | 47.21 | --- | 73.96 | 53.96 | -6.75 |
| 12308.75 | 1.00 | 346 | 37.44 | --- | 9.56 | 47.00 | --- | 73.96 | 53.96 | -6.96 |
| 22157.92 | 1.00 | 39 | 45.82 | --- | 3.25 | 49.07 | --- | 73.96 | 53.96 | -4.89 |
| 24619.37 | 1.00 | 240 | 46.49 | --- | 3.01 | 49.50 | --- | 73.96 | 53.96 | -4.46 |

Test mode: IEEE 802.11b CH11 for 1GHz to 25GHz [Vertical]

| <i>Frequency</i> | <i>Ant. H.</i> | <i>Table</i> | <i>Amplitude</i> | | <i>Correction Factor</i> | <i>Corrected Amplitude</i> | | <i>Limit</i> | | <i>Margin</i> |
|------------------|--------------------|---------------|--------------------|-------|------------------------------|--------------------------------|-------|--------------------|-------|---------------|
| | | | <i>Peak / Ave.</i> | | | <i>Peak / Ave.</i> | | <i>Peak / Ave.</i> | | |
| <i>MHz</i> | <i>m</i> | <i>degree</i> | <i>dBμV</i> | | <i>dB/m</i> | <i>dBμV/m</i> | | <i>dBμV/m</i> | | <i>dB</i> |
| 2319.99 | 1.00 | 42 | 48.16 | 38.17 | 8.99 | 57.15 | 47.16 | 73.96 | 53.96 | -6.80 |
| 2359.99 | 1.00 | 360 | 47.49 | 41.33 | 9.10 | 56.59 | 50.43 | 73.96 | 53.96 | -3.53 |
| 2486.08 | 1.00 | 360 | 47.67 | 37.83 | 9.45 | 57.12 | 47.28 | 73.96 | 53.96 | -6.68 |
| 2559.98 | 1.00 | 313 | 46.17 | 39.00 | 9.60 | 55.77 | 48.60 | 73.96 | 53.96 | -5.36 |
| 7384.79 | 1.00 | 27 | 36.28 | --- | 10.42 | 46.70 | --- | 73.96 | 53.96 | -7.26 |
| 9849.79 | 1.00 | 172 | 35.94 | --- | 11.93 | 47.87 | --- | 73.96 | 53.96 | -6.09 |

Test mode: IEEE 802.11g CH01 for 30MHz to 1GHz [Horizontal]

| Radiated Emission | | | | Correction Factors | Corrected Amplitude | Class B (3 m) | |
|--------------------------|-------------------------|--------------------|------------------|---------------------------|----------------------------|-----------------------|--------------------|
| Frequency (MHz) | Amplitude (dBμV) | Ant. H. (m) | Table () | | | Limit (dBμV/m) | Margin (dB) |
| 39.70 | 22.55 | 1.00 | 52 | 5.83 | 28.38 | 40.00 | -11.62 |
| 77.29 | 27.50 | 1.00 | 164 | 0.48 | 27.98 | 40.00 | -12.02 |
| 146.40 | 26.03 | 1.00 | 124 | -3.04 | 22.99 | 43.50 | -20.51 |
| 202.17 | 31.78 | 1.00 | 115 | -3.83 | 27.95 | 43.50 | -15.55 |
| 236.12 | 28.72 | 1.00 | 107 | -4.04 | 24.68 | 46.00 | -21.32 |
| 436.19 | 27.41 | 1.00 | 161 | 0.45 | 27.86 | 46.00 | -18.14 |

Test mode: IEEE 802.11g CH01 for 30MHz to 1GHz [Vertical]

| Radiated Emission | | | | Correction Factors | Corrected Amplitude | Class B (3 m) | |
|--------------------------|-------------------------|--------------------|------------------|---------------------------|----------------------------|-----------------------|--------------------|
| Frequency (MHz) | Amplitude (dBμV) | Ant. H. (m) | Table () | | | Limit (dBμV/m) | Margin (dB) |
| 39.70 | 25.58 | 1.00 | 213 | 5.83 | 31.41 | 40.00 | -8.59 |
| 100.32 | 28.00 | 1.00 | 311 | -1.24 | 26.76 | 43.50 | -16.74 |
| 170.65 | 26.12 | 1.00 | 29 | -3.79 | 22.33 | 43.50 | -21.17 |
| 288.26 | 31.26 | 1.00 | 357 | -3.80 | 27.46 | 46.00 | -18.54 |
| 434.97 | 26.63 | 1.00 | 245 | 0.41 | 27.04 | 46.00 | -18.96 |
| 528.34 | 26.49 | 1.00 | 198 | 4.10 | 30.59 | 46.00 | -15.41 |

Test mode: IEEE 802.11g CH01 for 1GHz to 25GHz [Horizontal]

| <i>Frequency</i> | <i>Ant. H.</i> | <i>Table</i> | <i>Amplitude</i> | | <i>Correction Factor</i> | <i>Corrected Amplitude</i> | | <i>Limit</i> | | <i>Margin</i> |
|------------------|--------------------|---------------|--------------------|-----|------------------------------|--------------------------------|-----|--------------------|-------|---------------|
| | | | <i>Peak / Ave.</i> | | | <i>Peak / Ave.</i> | | <i>Peak / Ave.</i> | | |
| <i>MHz</i> | <i>m</i> | <i>degree</i> | <i>dBμV</i> | | <i>dB/m</i> | <i>dBμV/m</i> | | <i>dBμV/m</i> | | <i>dB</i> |
| 2129.17 | 1.00 | 209 | 36.34 | --- | 8.45 | 44.79 | --- | 73.96 | 53.96 | -9.17 |
| 7233.75 | 1.00 | 49 | 35.61 | --- | 10.07 | 45.68 | --- | 73.96 | 53.96 | -8.28 |
| 9650.42 | 1.00 | 105 | 35.11 | --- | 11.47 | 46.58 | --- | 73.96 | 53.96 | -7.38 |
| 12061.04 | 1.00 | 315 | 38.60 | --- | 9.81 | 48.41 | --- | 73.96 | 53.96 | -5.55 |
| 21708.12 | 1.00 | 71 | 45.66 | --- | 2.87 | 48.53 | --- | 73.96 | 53.96 | -5.43 |
| 24120.00 | 1.00 | 144 | 46.32 | --- | 3.40 | 49.72 | --- | 73.96 | 53.96 | -4.24 |

Test mode: IEEE 802.11g CH01 for 1GHz to 25GHz [Vertical]

| <i>Frequency</i> | <i>Ant. H.</i> | <i>Table</i> | <i>Amplitude</i> | | <i>Correction Factor</i> | <i>Corrected Amplitude</i> | | <i>Limit</i> | | <i>Margin</i> |
|------------------|--------------------|---------------|--------------------|-------|------------------------------|--------------------------------|-------|--------------------|-------|---------------|
| | | | <i>Peak / Ave.</i> | | | <i>Peak / Ave.</i> | | <i>Peak / Ave.</i> | | |
| <i>MHz</i> | <i>m</i> | <i>degree</i> | <i>dBμV</i> | | <i>dB/m</i> | <i>dBμV/m</i> | | <i>dBμV/m</i> | | <i>dB</i> |
| 2312.50 | 1.00 | 43 | 42.67 | --- | 8.96 | 51.63 | --- | 73.96 | 53.96 | -2.33 |
| 2359.98 | 1.00 | 84 | 44.83 | 37.83 | 9.10 | 53.93 | 46.93 | 73.96 | 53.96 | -7.03 |
| 7233.75 | 1.00 | 360 | 36.28 | --- | 10.07 | 46.35 | --- | 73.96 | 53.96 | -7.61 |
| 9650.42 | 1.00 | 149 | 35.61 | --- | 11.47 | 47.08 | --- | 73.96 | 53.96 | -6.88 |
| 12061.04 | 1.00 | 259 | 38.77 | --- | 9.81 | 48.58 | --- | 73.96 | 53.96 | -5.38 |
| 21708.12 | 1.00 | 191 | 45.82 | --- | 2.87 | 48.69 | --- | 73.96 | 53.96 | -5.27 |
| 24120.00 | 1.00 | 238 | 46.66 | --- | 3.40 | 50.06 | --- | 73.96 | 53.96 | -3.90 |

Test mode: IEEE 802.11g CH06 for 30MHz to 1GHz [Horizontal]

| <i>Radiated Emission</i> | | | | <i>Correction Factors</i> | <i>Corrected Amplitude</i> | <i>Class B (3 m)</i> | |
|--------------------------|-------------------------|--------------------|------------------|---------------------------|----------------------------|-----------------------|--------------------|
| <i>Frequency (MHz)</i> | <i>Amplitude (dBμV)</i> | <i>Ant. H. (m)</i> | <i>Table ()</i> | | | <i>Limit (dBμV/m)</i> | <i>Margin (dB)</i> |
| 39.70 | 22.62 | 1.00 | 302 | 5.83 | 28.45 | 40.00 | -11.55 |
| 76.07 | 28.36 | 1.00 | 331 | 0.62 | 28.98 | 40.00 | -11.02 |
| 146.40 | 26.19 | 1.00 | 107 | -3.04 | 23.15 | 43.50 | -20.35 |
| 202.17 | 31.10 | 1.00 | 115 | -3.83 | 27.27 | 43.50 | -16.23 |
| 436.19 | 27.78 | 1.00 | 153 | 0.45 | 28.23 | 46.00 | -17.77 |
| 599.87 | 22.14 | 1.00 | 209 | 6.67 | 28.81 | 46.00 | -17.19 |

Test mode: IEEE 802.11g CH06 for 30MHz to 1GHz [Vertical]

| <i>Radiated Emission</i> | | | | <i>Correction Factors</i> | <i>Corrected Amplitude</i> | <i>Class B (3 m)</i> | |
|--------------------------|-------------------------|--------------------|------------------|---------------------------|----------------------------|-----------------------|--------------------|
| <i>Frequency (MHz)</i> | <i>Amplitude (dBμV)</i> | <i>Ant. H. (m)</i> | <i>Table ()</i> | | | <i>Limit (dBμV/m)</i> | <i>Margin (dB)</i> |
| 39.70 | 25.82 | 1.00 | 288 | 5.83 | 31.65 | 40.00 | -8.35 |
| 99.11 | 27.90 | 1.00 | 259 | -1.15 | 26.75 | 43.50 | -16.75 |
| 288.26 | 31.42 | 1.00 | 115 | -3.80 | 27.62 | 46.00 | -18.38 |
| 434.97 | 26.34 | 1.00 | 239 | 0.41 | 26.75 | 46.00 | -19.25 |
| 528.34 | 24.98 | 1.00 | 199 | 4.10 | 29.08 | 46.00 | -16.92 |
| 601.09 | 24.21 | 1.00 | 187 | 6.71 | 30.92 | 46.00 | -15.08 |

Test mode: IEEE 802.11g CH06 for 1GHz to 25GHz [Horizontal]

| <i>Frequency</i> | <i>Ant. H.</i> | <i>Table</i> | <i>Amplitude</i> | | <i>Correction Factor</i> | <i>Corrected Amplitude</i> | | <i>Limit</i> | | <i>Margin</i> |
|------------------|----------------|---------------|--------------------|-----|--------------------------|----------------------------|-----|--------------------|-------|---------------|
| | | | <i>Peak / Ave.</i> | | | <i>Peak / Ave.</i> | | <i>Peak / Ave.</i> | | |
| <i>MHz</i> | <i>m</i> | <i>degree</i> | <i>dBμV</i> | | <i>dB/m</i> | <i>dBμV/m</i> | | <i>dBμV/m</i> | | <i>dB</i> |
| 2279.17 | 1.00 | 89 | 36.50 | --- | 8.87 | 45.37 | --- | 73.96 | 53.96 | -8.59 |
| 4871.46 | 1.00 | 278 | 39.60 | --- | 3.95 | 43.55 | --- | 73.96 | 53.96 | -10.41 |
| 7312.29 | 1.00 | 35 | 35.61 | --- | 10.30 | 45.91 | --- | 73.96 | 53.96 | -8.05 |
| 9747.08 | 1.00 | 117 | 34.94 | --- | 11.89 | 46.83 | --- | 73.96 | 53.96 | -7.13 |
| 12187.92 | 1.00 | 347 | 39.77 | --- | 9.74 | 49.51 | --- | 73.96 | 53.96 | -4.45 |
| 24371.46 | 1.00 | 211 | 46.16 | --- | 3.26 | 49.42 | --- | 73.96 | 53.96 | -4.54 |

Test mode: IEEE 802.11g CH06 for 1GHz to 25GHz [Vertical]

| <i>Frequency</i> | <i>Ant. H.</i> | <i>Table</i> | <i>Amplitude</i> | | <i>Correction Factor</i> | <i>Corrected Amplitude</i> | | <i>Limit</i> | | <i>Margin</i> |
|------------------|----------------|---------------|--------------------|-------|--------------------------|----------------------------|-------|--------------------|-------|---------------|
| | | | <i>Peak / Ave.</i> | | | <i>Peak / Ave.</i> | | <i>Peak / Ave.</i> | | |
| <i>MHz</i> | <i>m</i> | <i>degree</i> | <i>dBμV</i> | | <i>dB/m</i> | <i>dBμV/m</i> | | <i>dBμV/m</i> | | <i>dB</i> |
| 2318.75 | 1.00 | 116 | 43.84 | --- | 8.98 | 52.82 | --- | 73.96 | 53.96 | -1.14 |
| 2359.99 | 1.00 | 116 | 43.99 | 38.00 | 9.10 | 53.09 | 47.10 | 73.96 | 53.96 | -6.68 |
| 4871.46 | 1.00 | 101 | 37.94 | --- | 3.95 | 41.89 | --- | 73.96 | 53.96 | -12.07 |
| 7312.29 | 1.00 | 237 | 34.94 | --- | 10.30 | 45.24 | --- | 73.96 | 53.96 | -8.72 |
| 9747.08 | 1.00 | 184 | 35.44 | --- | 11.89 | 47.33 | --- | 73.96 | 53.96 | -6.63 |
| 12187.92 | 1.00 | 279 | 40.60 | --- | 9.74 | 50.34 | --- | 73.96 | 53.96 | -3.62 |
| 24371.46 | 1.00 | 52 | 46.83 | --- | 3.26 | 50.09 | --- | 73.96 | 53.96 | -3.87 |

Test mode: IEEE 802.11g CH11 for 30MHz to 1GHz [Horizontal]

| Radiated Emission | | | | Correction Factors | Corrected Amplitude | Class B (3 m) | |
|--------------------------|-------------------------|--------------------|------------------|---------------------------|----------------------------|-----------------------|--------------------|
| Frequency (MHz) | Amplitude (dBμV) | Ant. H. (m) | Table () | | | Limit (dBμV/m) | Margin (dB) |
| 39.70 | 21.72 | 1.00 | 187 | 5.83 | 27.55 | 40.00 | -12.45 |
| 76.07 | 27.87 | 1.00 | 161 | 0.62 | 28.49 | 40.00 | -11.51 |
| 145.19 | 26.82 | 1.00 | 112 | -3.00 | 23.82 | 43.50 | -19.68 |
| 202.17 | 30.76 | 1.00 | 130 | -3.83 | 26.93 | 43.50 | -16.57 |
| 334.34 | 27.62 | 1.00 | 81 | -3.04 | 24.58 | 46.00 | -21.42 |
| 436.19 | 27.05 | 1.00 | 141 | 0.45 | 27.50 | 46.00 | -18.50 |

Test mode: IEEE 802.11g CH11 for 30MHz to 1GHz [Vertical]

| Radiated Emission | | | | Correction Factors | Corrected Amplitude | Class B (3 m) | |
|--------------------------|-------------------------|--------------------|------------------|---------------------------|----------------------------|-----------------------|--------------------|
| Frequency (MHz) | Amplitude (dBμV) | Ant. H. (m) | Table () | | | Limit (dBμV/m) | Margin (dB) |
| 39.70 | 26.53 | 1.00 | 186 | 5.83 | 32.36 | 40.00 | -7.64 |
| 100.32 | 28.54 | 1.00 | 218 | -1.24 | 27.30 | 43.50 | -16.20 |
| 168.22 | 25.59 | 1.00 | 0 | -3.73 | 21.86 | 43.50 | -21.64 |
| 288.26 | 31.40 | 1.00 | 247 | -3.80 | 27.60 | 46.00 | -18.40 |
| 436.19 | 27.29 | 1.00 | 232 | 0.45 | 27.74 | 46.00 | -18.26 |
| 528.34 | 26.54 | 1.00 | 193 | 4.10 | 30.64 | 46.00 | -15.36 |

Test mode: IEEE 802.11g CH11 for 1GHz to 25GHz [Horizontal]

| Frequency | Ant. H. | Table | Amplitude | | Correction Factor | Corrected Amplitude | | Limit | | Margin |
|-----------|------------|--------|-------------|-----|----------------------|------------------------|-----|-------------|-------|--------|
| | | | Peak / Ave. | | | Peak / Ave. | | Peak / Ave. | | |
| MHz | m | degree | dBμV | | dB/m | dBμV/m | | dBμV/m | | dB |
| 1991.67 | 1.00 | 242 | 36.67 | --- | 8.22 | 44.89 | --- | 73.96 | 53.96 | -9.07 |
| 4925.83 | 1.00 | 202 | 38.44 | --- | 4.13 | 42.57 | --- | 73.96 | 53.96 | -11.39 |
| 7384.79 | 1.00 | 24 | 34.94 | --- | 10.42 | 45.36 | --- | 73.96 | 53.96 | -8.60 |
| 9849.79 | 1.00 | 51 | 34.94 | --- | 11.93 | 46.87 | --- | 73.96 | 53.96 | -7.09 |
| 12308.75 | 1.00 | 69 | 38.44 | --- | 9.56 | 48.00 | --- | 73.96 | 53.96 | -5.96 |
| 22157.92 | 1.00 | 110 | 45.65 | --- | 3.25 | 48.90 | --- | 73.96 | 53.96 | -5.06 |

Test mode: IEEE 802.11g CH11 for 1GHz to 25GHz [Vertical]

| Frequency | Ant. H. | Table | Amplitude | | Correction Factor | Corrected Amplitude | | Limit | | Margin |
|-----------|------------|--------|-------------|-------|----------------------|------------------------|-------|-------------|-------|--------|
| | | | Peak / Ave. | | | Peak / Ave. | | Peak / Ave. | | |
| MHz | m | degree | dBμV | | dB/m | dBμV/m | | dBμV/m | | dB |
| 2358.36 | 1.00 | 131 | 44.50 | 32.17 | 9.09 | 53.59 | 41.26 | 73.96 | 53.96 | -12.70 |
| 2399.97 | 1.00 | 131 | 44.50 | 36.50 | 9.21 | 53.71 | 45.71 | 73.96 | 53.96 | -8.25 |
| 2518.35 | 1.00 | 129 | 44.01 | 31.83 | 9.52 | 53.53 | 41.35 | 73.96 | 53.96 | -12.61 |
| 4925.83 | 1.00 | 141 | 38.61 | --- | 4.13 | 42.74 | --- | 73.96 | 53.96 | -11.22 |
| 7384.79 | 1.00 | 217 | 34.94 | --- | 10.42 | 45.36 | --- | 73.96 | 53.96 | -8.60 |
| 9849.79 | 1.00 | 98 | 36.44 | --- | 11.93 | 48.37 | --- | 73.96 | 53.96 | -5.59 |
| 12308.75 | 1.00 | 118 | 37.27 | --- | 9.56 | 46.83 | --- | 73.96 | 53.96 | -7.13 |
| 24619.37 | 1.00 | 97 | 45.82 | --- | 3.01 | 48.83 | --- | 73.96 | 53.96 | -5.13 |

8.5 Test Result of the Bandedge


If any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either *at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a)*,

We perform this section by the *radiated manner*, the RBW is set to 100kHz and VBW>RBW. We'd made the observation *up to 10th harmonics and the criterion is all the harmonic/spurious emissions must be 20dB below the highest emission level measured*. If the emissions fall in the restricted bands stated in the Part15.205(a) must also *comply with the radiated emission limits specified in Part15.209(a)*. (*Peak mode: RBW=VBW=1MHz, Average mode: RBW=1MHz; VBW=10Hz*)

The following pages show our observations referring to the channel 1 and 11 respectively.

Test Condition & Setup: same as < 8.1 >

Channel 1 of IEEE 802.11b

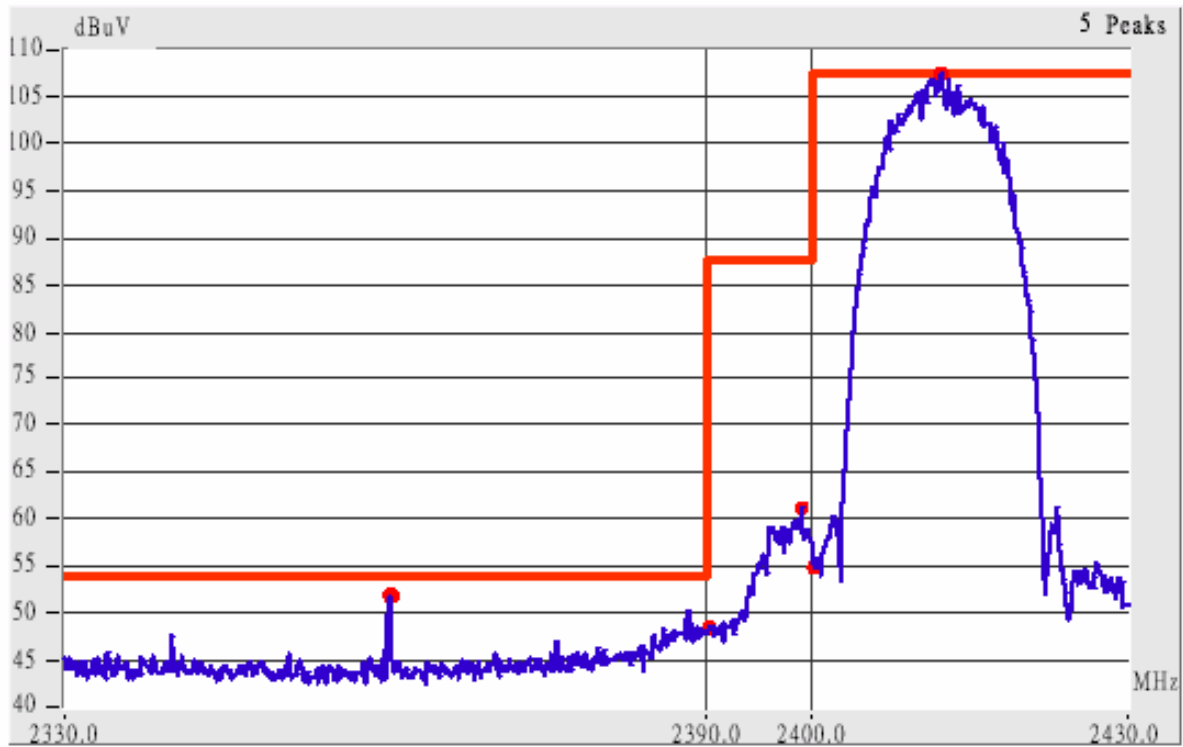


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

1. The lobe left by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

| <i>Radiated Emission</i> | | | | | <i>Corrected Amplitude</i> | | <i>Class B (3m)</i> | | |
|--------------------------|----------------|--------------------|--------------------|---------------------|----------------------------|----------------|-----------------------|-------------|--------------------|
| <i>Frequency (MHz)</i> | <i>Ant. P.</i> | <i>Ant. H. (m)</i> | <i>Table (°)</i> | <i>Factors (dB)</i> | <i>(dBµV/m)</i> | | <i>Limit (dBµV/m)</i> | | <i>Margin (dB)</i> |
| | | | | | <i>Peak</i> | <i>Average</i> | <i>Peak</i> | <i>Ave.</i> | |
| 2359.95 | Hor | 1.00 | 154 | 9.10 | 48.76 | --- | 74.00 | 53.96 | -5.20 |
| 2390.02 | Hor | 1.00 | 56 | 9.18 | 47.02 | --- | 74.00 | 53.96 | -6.94 |
| 2360.07 | Ver | 1.00 | 87 | 9.10 | 57.43 | 49.27 | 74.00 | 53.96 | -4.69 |
| 2385.54 | Ver | 1.00 | 270 | 9.17 | 59.84 | 46.84 | 74.00 | 53.96 | -7.12 |
| 2389.87 | Ver | 1.00 | 8 | 9.18 | 59.02 | 48.18 | 74.00 | 53.96 | -5.78 |

Channel 11 of IEEE 802.11b

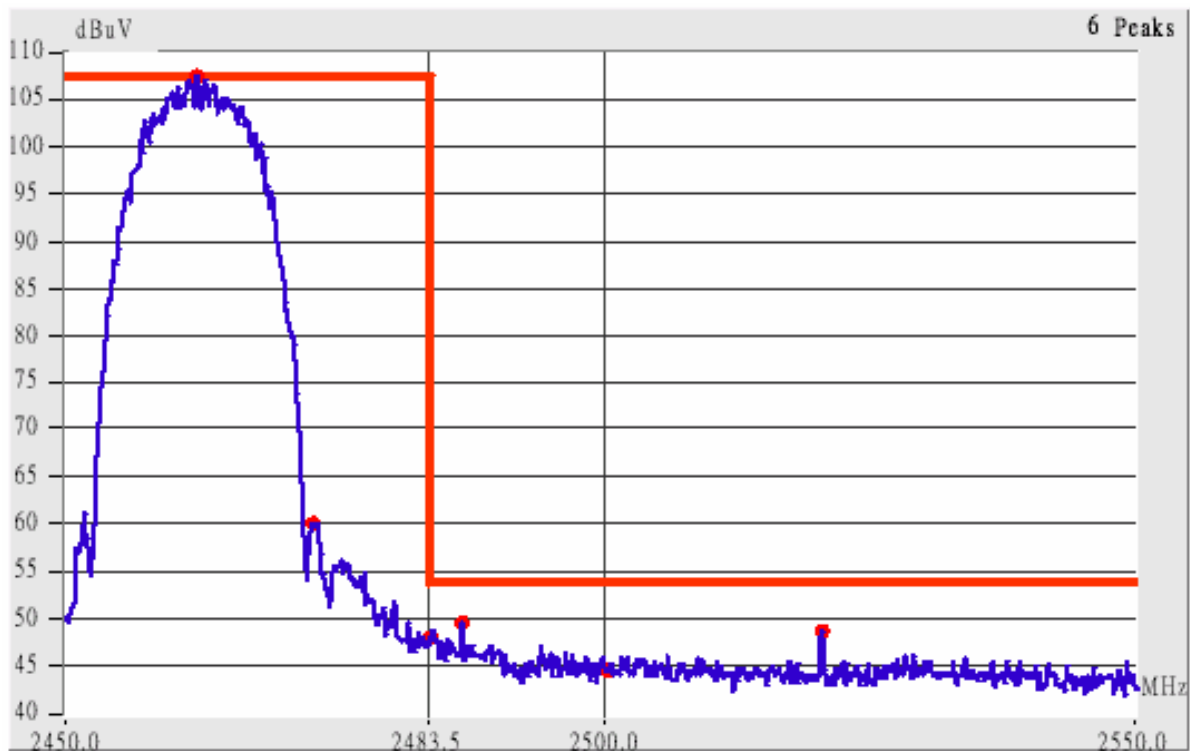


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

3. The lobe right by the fundamental side is already 20dB below the highest emission level.
4. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below

| <i>Radiated Emission</i> | | | | | <i>Corrected Amplitude</i> | | <i>Class B (3m)</i> | | |
|--------------------------|----------------|--------------------|--------------------|---------------------|----------------------------|----------------|-----------------------|-------------|--------------------|
| <i>Frequency (MHz)</i> | <i>Ant. P.</i> | <i>Ant. H. (m)</i> | <i>Table (°)</i> | <i>Factors (dB)</i> | <i>(dBµV/m)</i> | | <i>Limit (dBµV/m)</i> | | <i>Margin (dB)</i> |
| | | | | | <i>Peak</i> | <i>Average</i> | <i>Peak</i> | <i>Ave.</i> | |
| 2487.99 | Hor | 1.00 | 171 | 9.46 | 48.46 | --- | 74.00 | 53.96 | -5.50 |
| 2512.20 | Hor | 1.00 | 174 | 9.51 | 48.18 | --- | 74.00 | 53.96 | -5.78 |
| 2483.38 | Ver | 1.00 | 135 | 9.44 | 57.94 | 47.77 | 74.00 | 53.96 | -6.19 |
| 2488.47 | Ver | 1.00 | 95 | 9.46 | 58.29 | 46.46 | 74.00 | 53.96 | -7.50 |
| 2500.04 | Ver | 1.00 | 139 | 9.49 | 56.82 | 44.99 | 74.00 | 53.96 | -8.97 |
| 2519.99 | Ver | 1.00 | 287 | 9.53 | 57.03 | 47.03 | 74.00 | 53.96 | -6.93 |

Channel 1 of IEEE 802.11g

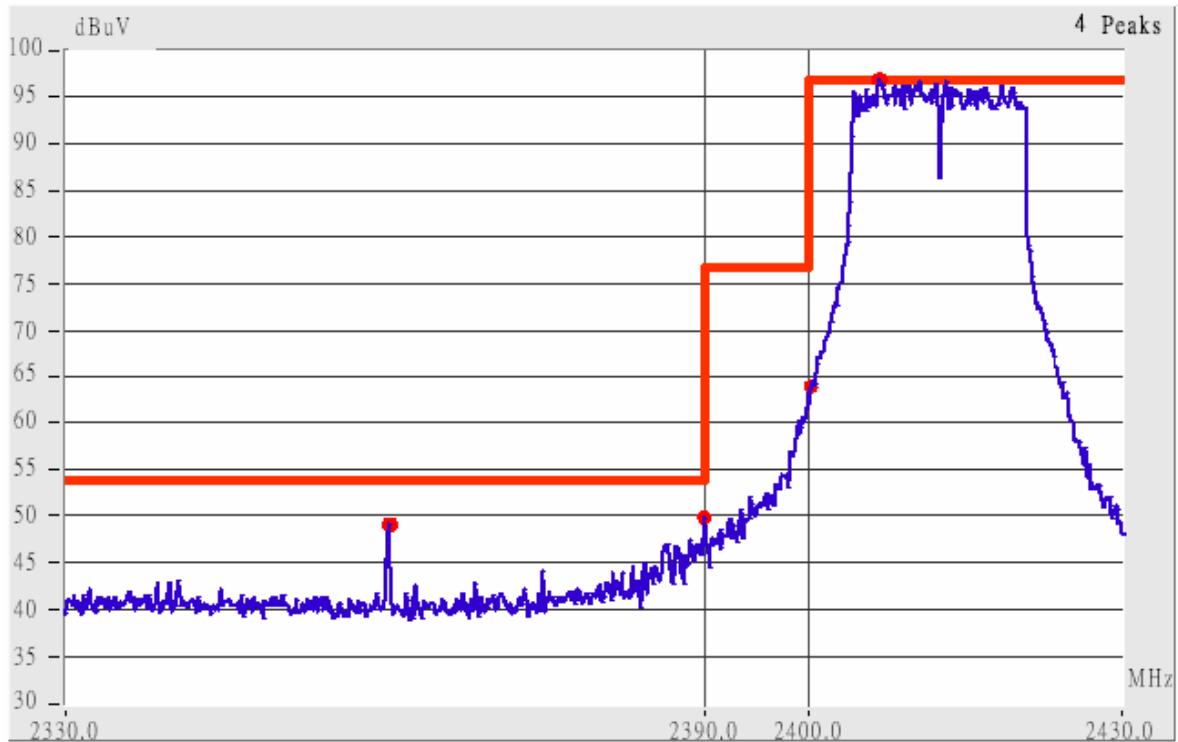

This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

- 5. The lobe left by the fundamental side is already 20dB below the highest emission level.
- 6. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

| <i>Radiated Emission</i> | | | | | <i>Corrected Amplitude</i> | | <i>Class B (3m)</i> | | |
|--------------------------|----------------|--------------------|------------------|---------------------|----------------------------|----------------|-----------------------|-------------|--------------------|
| <i>Frequency (MHz)</i> | <i>Ant. P.</i> | <i>Ant. H. (m)</i> | <i>Table ()</i> | <i>Factors (dB)</i> | <i>(dBµV/m)</i> | | <i>Limit (dBµV/m)</i> | | <i>Margin (dB)</i> |
| | | | | | <i>Peak</i> | <i>Average</i> | <i>Peak</i> | <i>Ave.</i> | |
| 2359.95 | Hor | 1.00 | 166 | 9.10 | 46.10 | --- | 74.00 | 53.96 | -7.86 |
| 2386.93 | Hor | 1.00 | 63 | 9.17 | 50.67 | --- | 74.00 | 53.96 | -3.29 |
| 2390.02 | Hor | 1.00 | 66 | 9.18 | 52.35 | --- | 74.00 | 53.96 | -1.61 |
| 2359.98 | Ver | 1.00 | 186 | 9.10 | 55.10 | 46.93 | 74.00 | 53.96 | -7.03 |
| 2389.19 | Ver | 1.00 | 53 | 9.18 | 62.35 | 45.18 | 74.00 | 53.96 | -8.78 |
| 2390.13 | Ver | 1.00 | 50 | 9.18 | 60.68 | 46.01 | 74.00 | 53.96 | -7.95 |

Channel 11 of IEEE 802.11g



This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

- 7. The lobe right by the fundamental side is already 20dB below the highest emission level.
- 8. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below


| <i>Radiated Emission</i> | | | | | <i>Corrected Amplitude</i> | | <i>Class B (3m)</i> | | |
|--------------------------|----------------|--------------------|--------------------|---------------------|----------------------------|----------------|-----------------------|-------------|--------------------|
| <i>Frequency (MHz)</i> | <i>Ant. P.</i> | <i>Ant. H. (m)</i> | <i>Table (°)</i> | <i>Factors (dB)</i> | <i>(dBμV/m)</i> | | <i>Limit (dBμV/m)</i> | | <i>Margin (dB)</i> |
| | | | | | <i>Peak</i> | <i>Average</i> | <i>Peak</i> | <i>Ave.</i> | |
| 2483.50 | Hor | 1.00 | 229 | 9.44 | 49.78 | --- | 74.00 | 53.96 | -4.18 |
| 2485.19 | Hor | 1.00 | 237 | 9.45 | 49.95 | --- | 74.00 | 53.96 | -4.01 |
| 2483.23 | Ver | 1.00 | 343 | 9.44 | 59.61 | 44.61 | 74.00 | 53.96 | -9.35 |
| 2484.88 | Ver | 1.00 | 341 | 9.45 | 62.61 | 43.62 | 74.00 | 53.96 | -10.34 |
| 2500.01 | Ver | 1.00 | 343 | 9.49 | 51.66 | --- | 74.00 | 53.96 | -2.30 |
| 2513.54 | Ver | 1.00 | 343 | 9.52 | 54.52 | 41.35 | 74.00 | 53.96 | -12.61 |

IX. Section 15.247(d): Power Spectral Density

9.1 Test Condition & Setup

The tests below are running with the EUT transmitter set at high power in TDD mode. The EUT is needed to force selection of output power level and channel number. While testing, the EUT was set to transmit continuously and to be tested by the contact manner with the spectrum analyzer.

9.2 Test Instruments Configuration

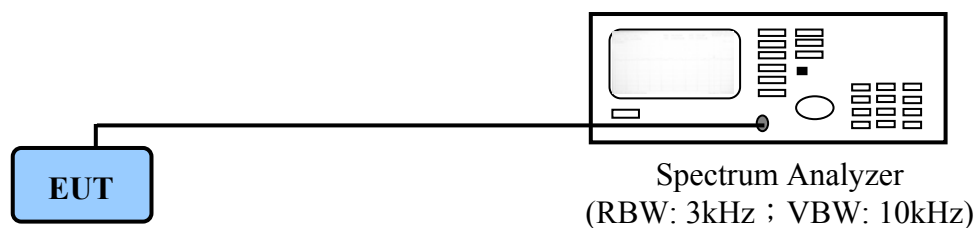

PC to control the EUT at maximal power output and channel number and set antenna kit

9.3 List of Test Instruments

| Instrument Name | Model No. | Brand | Serial No. | Next time |
|-------------------|-----------|---------|------------|-----------|
| Spectrum Analyzer | MS2665C | ANRITSU | 6200175476 | 12/30/04 |

9.4 Test Result of Power spectral density


The following table shows a summary of the test results of the Power Spectral Density.

| <i>Channel</i> | <i>Ppr (dBm)</i> | <i>Cable Loss (dB)</i> | <i>Ppq (dBm)</i> | <i>Limit (dB)</i> | <i>Margin (dB)</i> |
|----------------|----------------------|----------------------------|----------------------|-----------------------|------------------------|
| 802.11b CH 01 | -10.98 | 2.11 | -8.87 | 8.00 | -16.87 |
| 802.11b CH 06 | -11.03 | 2.28 | -8.75 | 8.00 | -16.75 |
| 802.11b CH 11 | -10.90 | 2.32 | -8.58 | 8.00 | -16.58 |
| 802.11g CH 01 | -23.06 | 2.11 | -20.95 | 8.00 | -28.95 |
| 802.11g CH 06 | -23.08 | 2.28 | -20.80 | 8.00 | -28.80 |
| 802.11g CH 11 | -23.05 | 2.32 | -20.73 | 8.00 | -28.73 |


Note:

1. The following pages show the results of spectrum reading.
2. Ppr: spectrum read power density (using peak search mode),
Ppq: actual peak power density in the spread spectrum band.
3. $Ppq = Ppr + |Cable Loss|$

Power spectral density for CH01

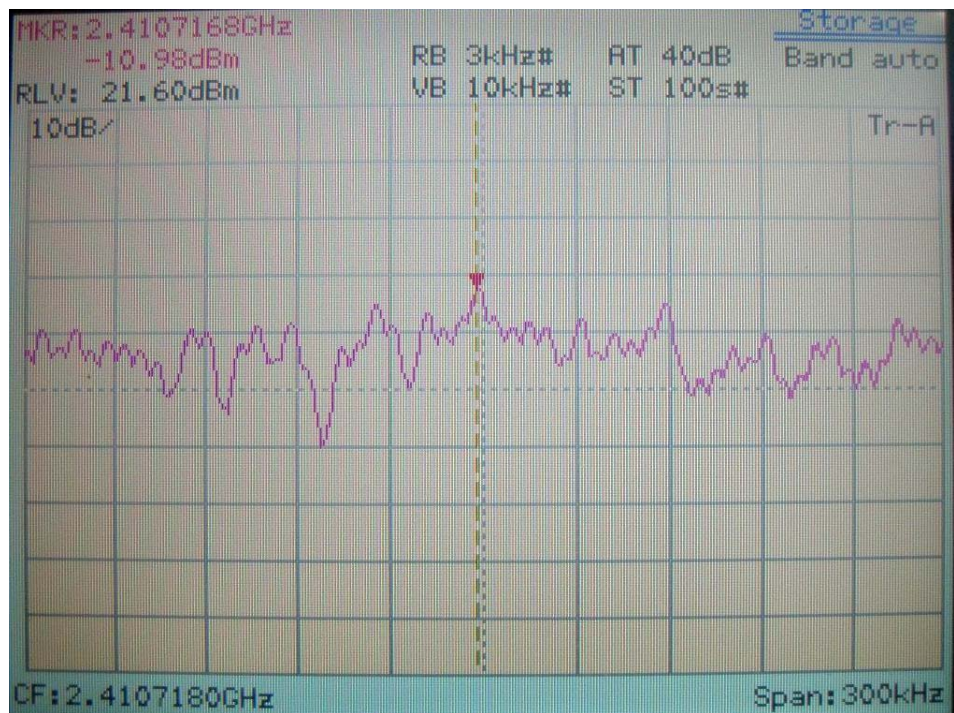


IEEE 802.11b

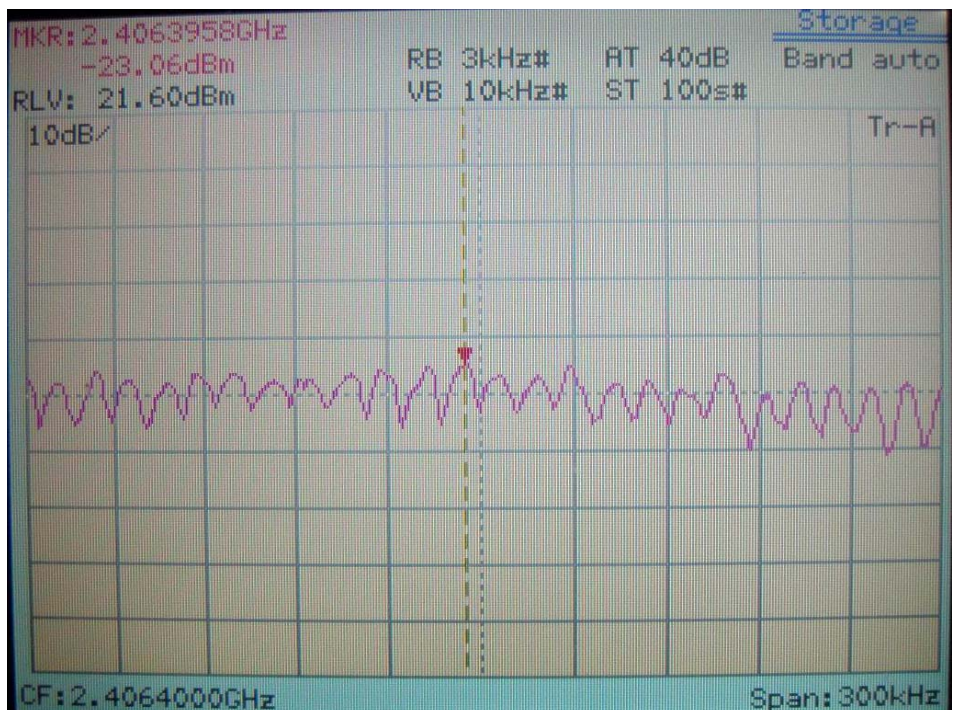


IEEE 802.11g

Power spectral density for CH06

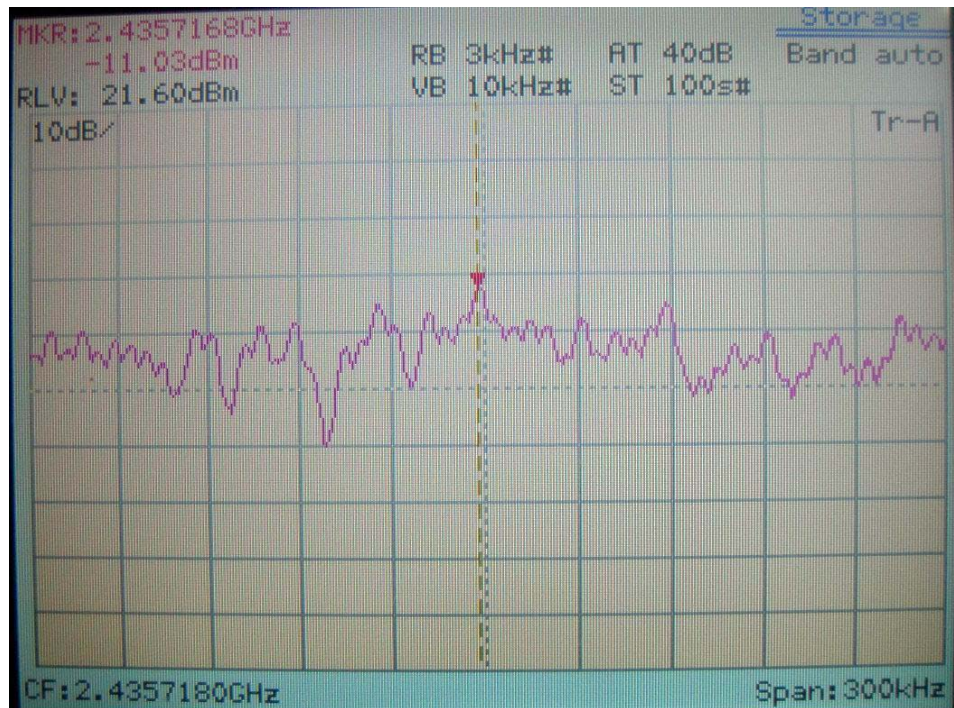


IEEE 802.11b

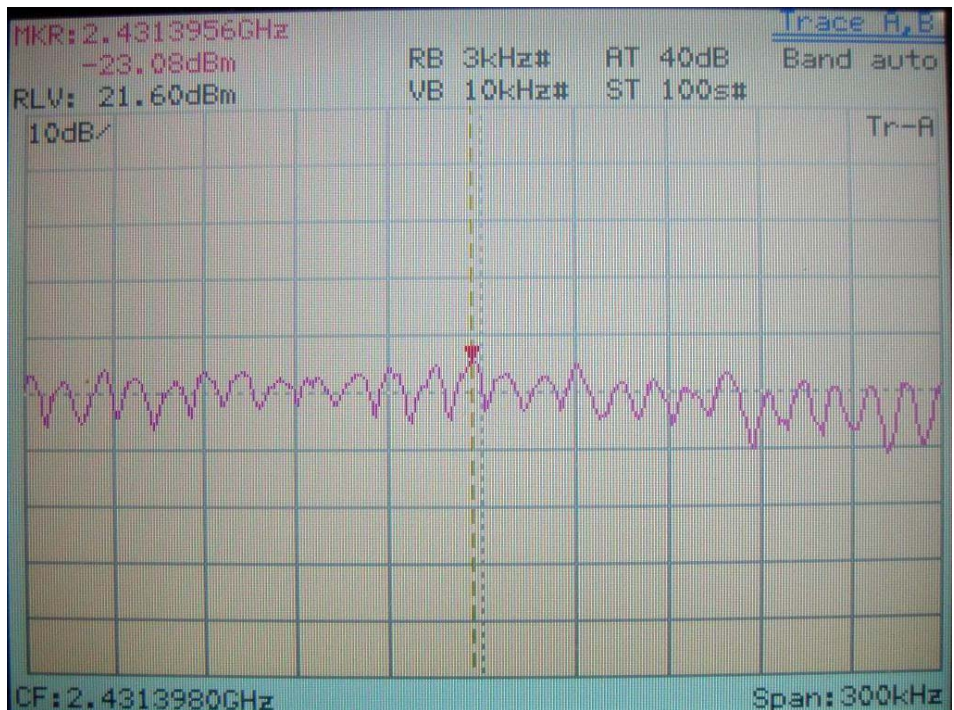


IEEE 802.11g

Power spectral density for CH11

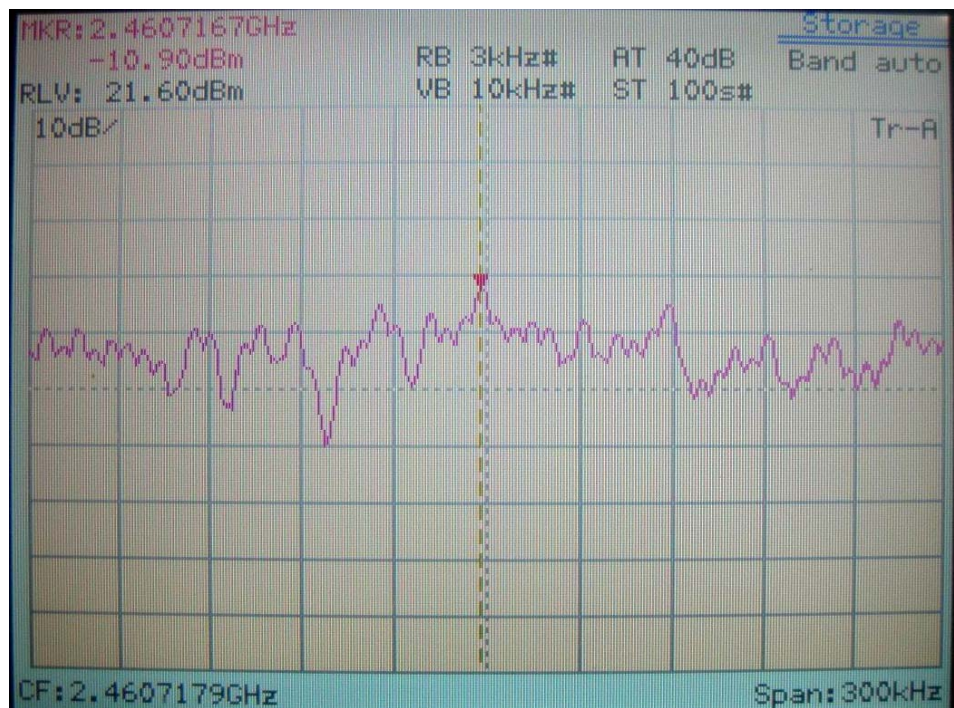

IEEE 802.11b

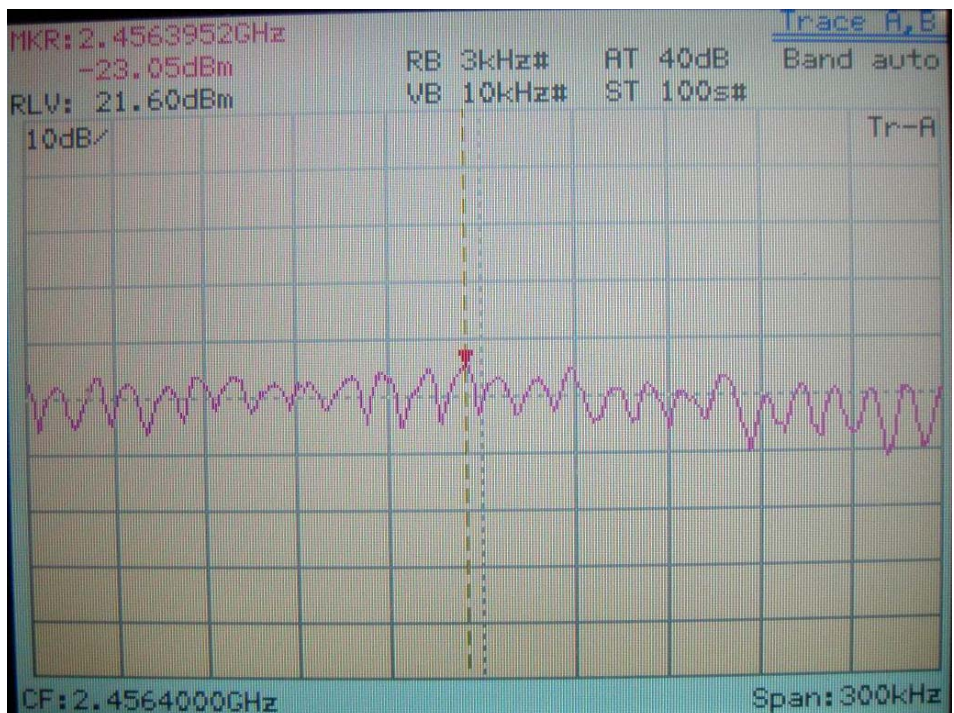

IEEE 802.11g

Appendix A

Brand name and Model name List

| <i>Brand Name</i> | <i>Model Name</i> |
|-------------------|-------------------|
| CAMEO | WLG-1203 |
| Toplink | WL-G54MIA |
| LG CNS | LWG5410P |
| Encore | ENLWI-G |
| KTI | KWG-7002 |
| Allnet GmbH | ALL0261 |
| TRENDware | TEW-423PI |
| Kobian | KOB WL531 |
| Fusion | FC-NC9010 |
| Bona | WLG-PCI /II |
| Target | 242200 |
| PEABIRD | PEAB-WLG-PCI |
| Connectland | WIRE-CNL-G-PCI |
| LEMEL | LM-WLG600I/S |