



FCC TEST REPORT

REPORT NO.: RF951030L04A

MODEL NO.: TEW-434APB

SERIES MODEL NO.: TEW-433APBO

RECEIVED: Nov. 14, 2006

TESTED: Nov. 14, 2006 ~ Jan. 08, 2007

ISSUED: May 15, 2007

APPLICANT: TRENDware International Inc.

ADDRESS: 20675 Manhanntan Place, Torrance, CA 90501,
USA

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Kueishan, Taoyuan,
Taiwan, R.O.C.

This test report consists of 78 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.





Table of Contents

1	CERTIFICATION.....	4
2	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	5
3	GENERAL INFORMATION.....	6
3.1	GENERAL DESCRIPTION OF EUT.....	6
3.2	DESCRIPTION OF TEST MODES.....	8
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST.....	8
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	10
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	12
3.4	DESCRIPTION OF SUPPORT UNITS.....	12
4	TEST TYPES AND RESULTS	13
4.1	CONDUCTED EMISSION MEASUREMENT.....	13
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	13
4.1.2	TEST INSTRUMENTS.....	13
4.1.3	TEST PROCEDURES	14
4.1.4	DEVIATION FROM TEST STANDARD	14
4.1.5	TEST SETUP.....	15
4.1.6	EUT OPERATING CONDITIONS.....	15
4.1.7	TEST RESULTS	16
4.2	RADIATED EMISSION MEASUREMENT.....	34
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	34
4.2.2	TEST INSTRUMENTS.....	35
4.2.3	TEST PROCEDURES	36
4.2.4	DEVIATION FROM TEST STANDARD	36
4.2.5	TEST SETUP.....	37
4.2.6	EUT OPERATING CONDITIONS.....	37
4.2.7	TEST RESULTS	38
4.3	6dB BANDWIDTH MEASUREMENT	47
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT.....	47
4.3.2	TEST INSTRUMENTS.....	47
4.3.3	TEST PROCEDURE.....	48
4.3.4	DEVIATION FROM TEST STANDARD	48
4.3.5	TEST SETUP.....	48
4.3.6	EUT OPERATING CONDITIONS.....	48
4.3.7	TEST RESULTS	49
4.4	MAXIMUM PEAK OUTPUT POWER	55
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	55
4.4.2	TEST INSTRUMENTS.....	55
4.4.3	TEST PROCEDURES	56
4.4.4	DEVIATION FROM TEST STANDARD	56
4.4.5	TEST SETUP.....	56



4.4.6	EUT OPERATING CONDITIONS	56
4.4.7	TEST RESULTS	57
4.5	POWER SPECTRAL DENSITY MEASUREMENT	58
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	58
4.5.2	TEST INSTRUMENTS.....	58
4.5.3	TEST PROCEDURE.....	59
4.5.4	DEVIATION FROM TEST STANDARD	59
4.5.5	TEST SETUP	59
4.5.6	EUT OPERATING CONDITIONS	59
4.5.7	TEST RESULTS	60
4.6	BAND EDGES MEASUREMENT	66
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	66
4.6.2	TEST INSTRUMENTS.....	66
4.6.3	TEST PROCEDURE.....	66
4.6.4	DEVIATION FROM TEST STANDARD	66
4.6.5	EUT OPERATING CONDITION	66
4.6.6	TEST RESULTS	67
4.7	ANTENNA REQUIREMENT	75
4.7.1	STANDARD APPLICABLE	75
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	75
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	76
6	INFORMATION ON THE TESTING LABORATORIES.....	77
	APPENDIX-A.....	A-1



1 CERTIFICATION

PRODUCT : 54Mbps Wireless Access Point with PoE
MODEL NO.: TEW-434APB
SERIES MODEL NO.: TEW-433APBO
BRAND: TRENDnet
APPLICANT : TRENDware International Inc.
TESTED: Nov. 14, 2006 ~ Jan. 08, 2007
TEST SAMPLE: ENGINEERING SAMPLE
STANDARDS : **FCC Part 15, Subpart C (Section 15.247),**
ANSI C63.4-2003

The above equipment (model: TEW-434APB) have been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Wendy Liao , **DATE:** May 15, 2007
Wendy Liao

TECHNICAL ACCEPTANCE : Long Chen , **DATE:** May 15, 2007
Responsible for RF Long Chen

APPROVED BY : Gary Chang , **DATE:** May 15, 2007
Gary Chang / Supervisor

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -9.19dB at 0.268MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit : min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.22dB at 2320.00MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

Measurement	Frequency	Uncertainty
Conducted emissions	9kHz~30MHz	2.44 dB
	30MHz ~ 200MHz	3.59 dB
Radiated emissions	200MHz ~1000MHz	3.61 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	54Mbps Wireless Access Point with PoE
MODEL NO.	TEW-434APB
SERIES MODEL NO.	TEW-433APBO
FCC ID	S9ZTEW434APB
POWER SUPPLY	7.5Vdc or 5Vdc from AC adapters 48Vdc form POE
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
MAXIMUM OUTPUT POWER	64.417mW
ANTENNA TYPE	Dipole antenna with 2dBi gain
I/O PORTS	RJ45
DATA CABLE	NA

NOTE:

1. This report is issued as a duplicated report of ADT report no. RF951030L04. Only applicant, Product name, model no and brand name have changed.
2. The models are identical to each other except their model designation due to marketing requirement.

BRAND	MODEL
TRENDnet	TEW-434APB
	TEW-433APBO

3. The EUT were powered by the following adapters and POE:

ADAPTER 1	
BRAND:	LEI
MODEL:	410710003CT
INPUT:	120Vac, 60Hz, 15W
OUTPUT:	7.5Vdc, 1000mA
POWER LINE:	1.8m non-shielded cable without core

ADAPTER 2	
BRAND:	JENTEC TECHNOLOGY CO., LTD.
MODEL:	AF1275-B
INPUT:	100-120Vac, 50-60Hz
OUTPUT:	5Vdc, 2.5A
POWER LINE:	1.8m non-shielded cable without core

POE	
BRAND:	Base-Unit
MODEL:	EBU-201-T1
RATING:	48Vdc, 0.4A

Adapter for POE	
BRAND:	Bothhand Enterprise Inc.
MODEL:	SA06L48-V
INPUT:	100-240Vac, 50-60Hz, 0.6A 1.6m non-shielded cable without core
OUTPUT:	48Vdc, 0.4A 1.6m non-shielded cable with one core

** **NOTE:** The POE is for support unit only.

4. The EUT complies with IEEE 802.11g standards and backwards compatible with IEEE 802.11b products.
5. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.


3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided to this EUT.


Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Test Mode A, B

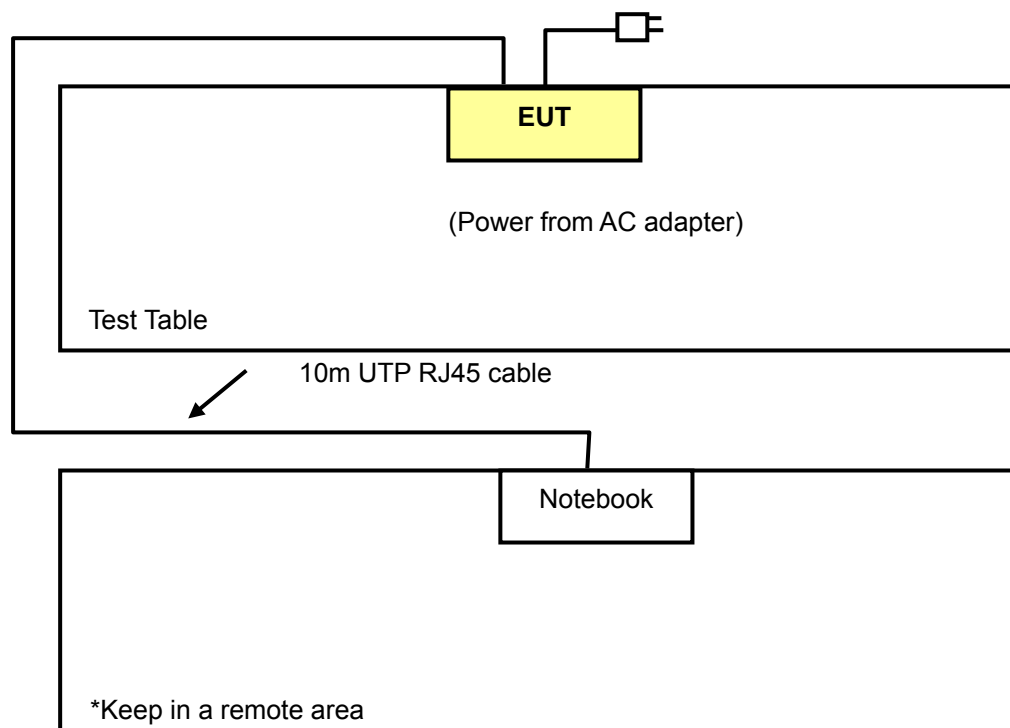

Test Mode C

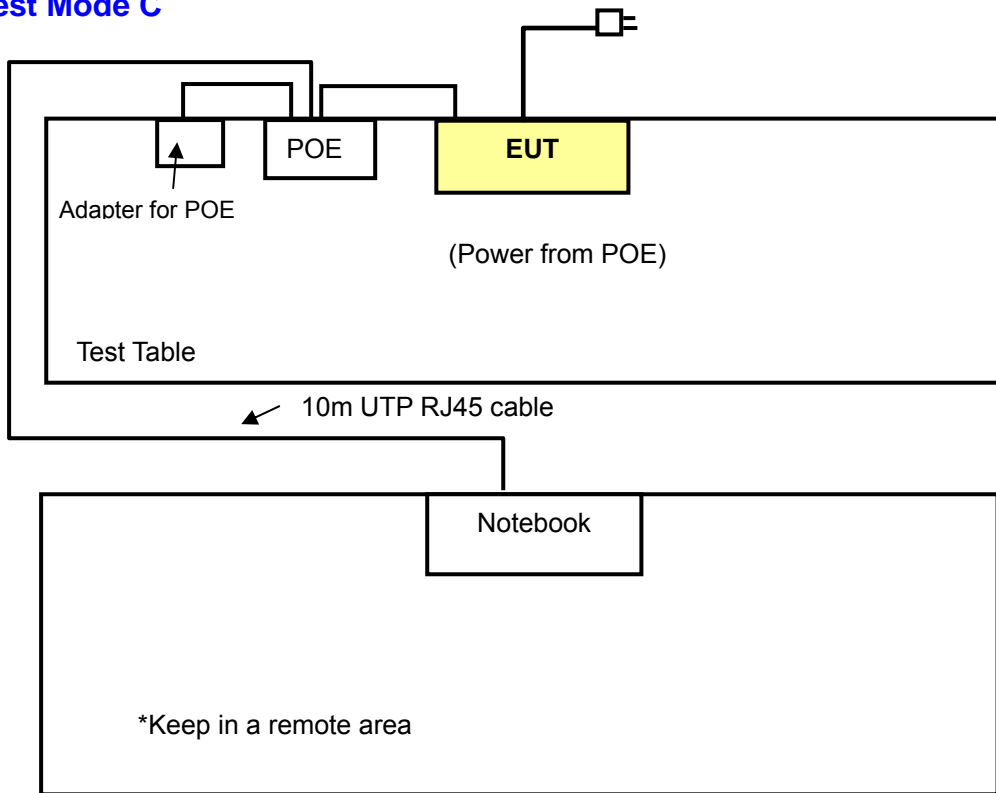

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
A	√	√	-	-	Power from AC adapter: 410710003CT
B	√	√	√	√	Power from AC adapter: AF1275-B
C	√	√	-	-	Power from POE: EBU-201-T1

Where **PLC**: Power Line Conducted Emission

RE<1G: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

Note: “_” means no effect.

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
B	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
C	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11g	1 to 11	11	OFDM	BPSK	6
B	802.11g	1 to 11	11	OFDM	BPSK	6
C	802.11g	1 to 11	11	OFDM	BPSK	6

Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

Bandedge Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 11	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)
ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	16484462992	E2K24CLNS
2	POE	Base-Unit	EBU-201-T1	NA	NA
3	ADAPTER FOR POE	Bothhand Enterprise Inc.	SA06L48-V	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA
3	1.6m non-shielded cable.

NOTE:

1. All power cords of the above support units are non shielded (1.8m).
2. Item 1 acted as communication partners to transfer data.
3. The item 2 ~ 3 is provided by our client.

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Sep. 25, 2007
RF signal cable Woken	5D-FB	Cable-HYCO3-01	Jan. 06, 2008
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Jan. 09, 2007
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Jan. 22, 2007
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2.
 3. The VCCI Site Registration No. is C-2047.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under Limit - 20dB was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

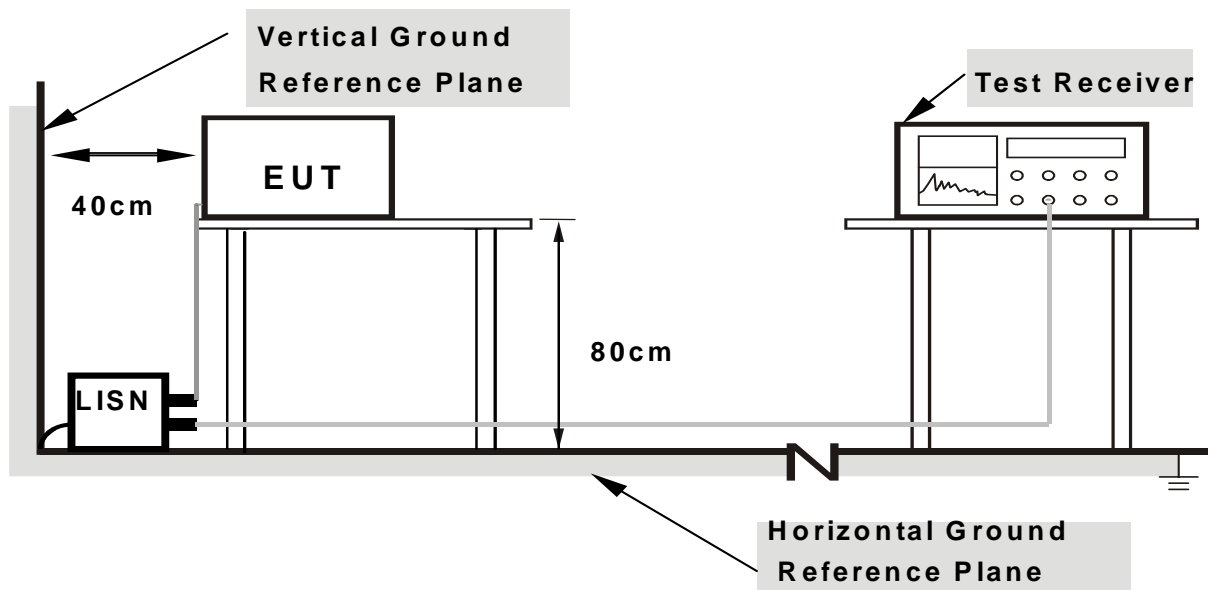

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Connected the EUT with the notebooks system via RJ45 cables, and placed on a testing table.
- b. The notebooks system connected with EUT and run a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.


4.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA ADAPTER : 410710003CT

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	TEST MODE	A
TESTED BY	Dean Wang		

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.189	0.10	53.60	-	53.70	-	64.08	54.08	-10.38	-
2	0.403	0.10	42.88	-	42.98	-	57.80	47.80	-14.82	-
3	0.757	0.11	39.15	-	39.26	-	56.00	46.00	-16.74	-
4	1.586	0.12	31.15	-	31.27	-	56.00	46.00	-24.73	-
5	7.055	0.41	21.03	-	21.44	-	60.00	50.00	-38.56	-
6	15.661	0.79	28.87	-	29.66	-	60.00	50.00	-30.34	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

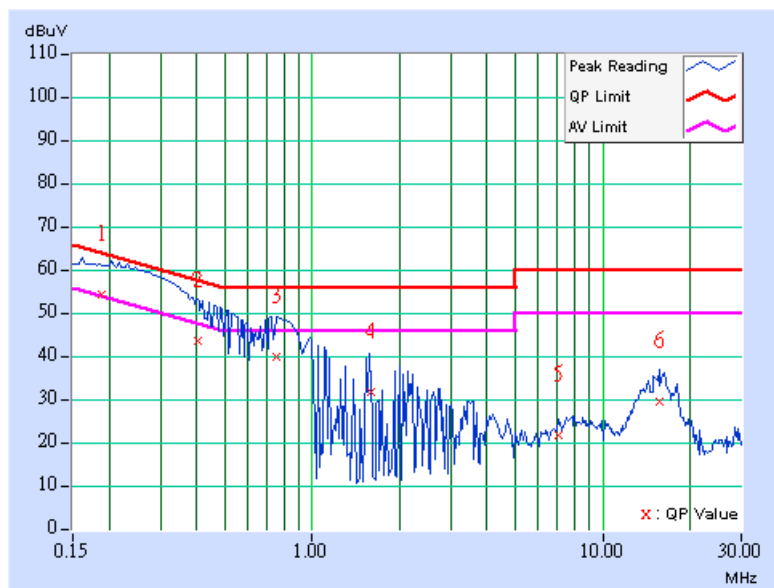

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	TEST MODE	A
TESTED BY	Dean Wang		

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.267	0.10	51.76	23.25	51.86	23.35	61.21	51.21	-9.35	-27.86
2	0.355	0.10	48.49	-	48.59	-	58.84	48.84	-10.25	-
3	0.909	0.11	39.27	-	39.38	-	56.00	46.00	-16.62	-
4	1.528	0.12	33.31	-	33.43	-	56.00	46.00	-22.57	-
5	4.239	0.29	19.82	-	20.11	-	56.00	46.00	-35.89	-
6	15.298	0.68	29.82	-	30.50	-	60.00	50.00	-29.50	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

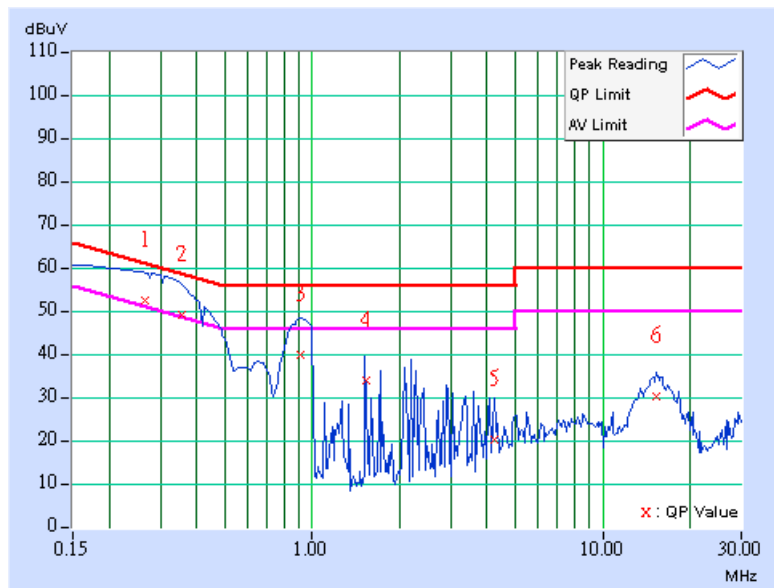

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	TEST MODE	A
TESTED BY	Dean Wang		

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.192	0.10	53.77	-	53.87	-	63.95	53.95	-10.08	-
2	0.268	0.10	51.88	22.44	51.98	22.54	61.17	51.17	-9.19	-28.63
3	0.799	0.11	38.84	-	38.95	-	56.00	46.00	-17.05	-
4	2.116	0.13	28.73	-	28.86	-	56.00	46.00	-27.14	-
5	7.230	0.41	18.50	-	18.91	-	60.00	50.00	-41.09	-
6	15.434	0.79	30.19	-	30.98	-	60.00	50.00	-29.02	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

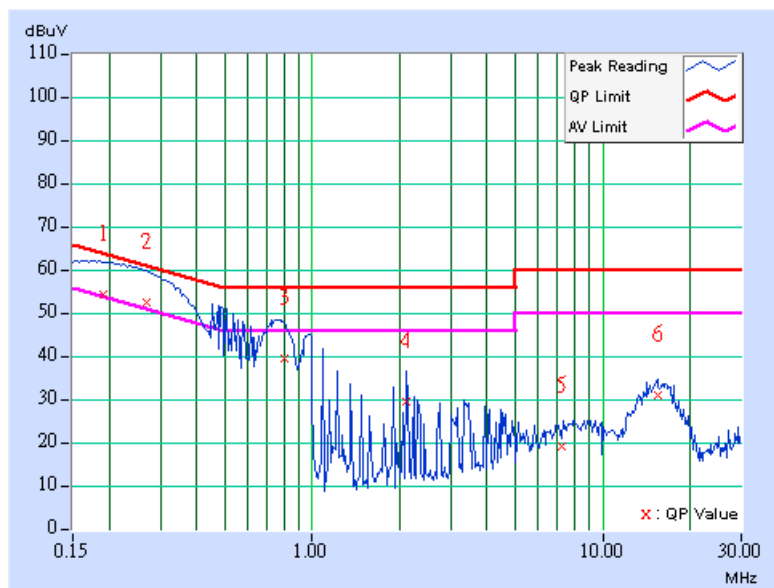

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	TEST MODE	A
TESTED BY	Dean Wang		

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.231	0.10	53.09	22.47	53.19	22.57	62.40	52.40	-9.21	-29.83
2	0.341	0.10	49.31	19.28	49.41	19.38	59.17	49.17	-9.76	-29.79
3	0.918	0.11	39.57	-	39.68	-	56.00	46.00	-16.32	-
4	1.546	0.12	33.55	-	33.67	-	56.00	46.00	-22.33	-
5	4.188	0.28	21.49	-	21.77	-	56.00	46.00	-34.23	-
6	15.375	0.68	29.82	-	30.50	-	60.00	50.00	-29.50	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

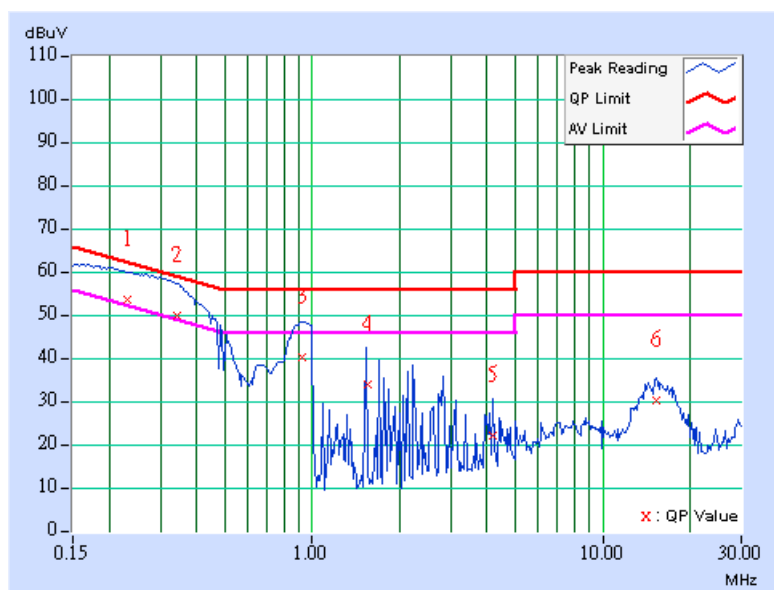

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	TEST MODE	A
TESTED BY	Dean Wang		

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.187	0.10	53.98	-	54.08	-	64.17	54.17	-10.09	-
2	0.299	0.10	50.74	20.41	50.84	20.51	60.27	50.27	-9.43	-29.76
3	1.016	0.11	35.58	-	35.69	-	56.00	46.00	-20.31	-
4	2.052	0.12	29.14	-	29.26	-	56.00	46.00	-26.74	-
5	7.055	0.41	20.73	-	21.14	-	60.00	50.00	-38.86	-
6	15.299	0.79	29.06	-	29.85	-	60.00	50.00	-30.15	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

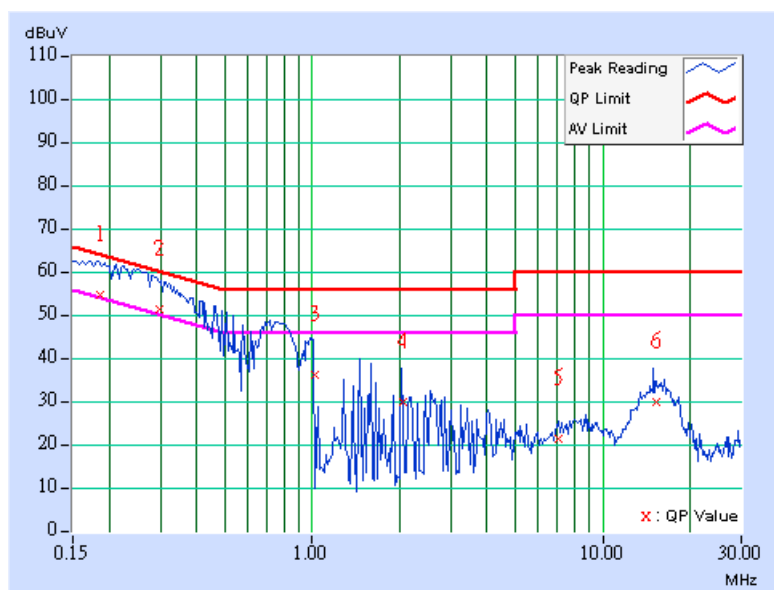

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	TEST MODE	A
TESTED BY	Dean Wang		

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.186	0.10	53.94	-	54.04	-	64.20	54.20	-10.16	-
2	0.336	0.10	49.66	19.70	49.76	19.80	59.30	49.30	-9.54	-29.50
3	0.887	0.11	39.10	-	39.21	-	56.00	46.00	-16.79	-
4	1.422	0.11	30.71	-	30.82	-	56.00	46.00	-25.18	-
5	3.813	0.27	19.17	-	19.44	-	56.00	46.00	-36.56	-
6	15.254	0.68	30.52	-	31.20	-	60.00	50.00	-28.80	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

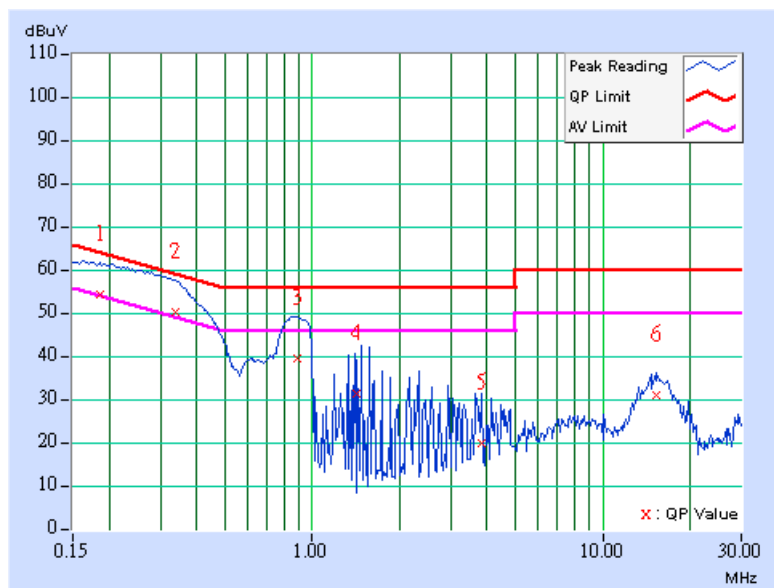


ADAPTER: AF1275-B

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.10	47.12	-	47.22	-	64.61	54.61	-17.39	-
2	0.529	0.10	45.03	-	45.13	-	56.00	46.00	-10.87	-
3	1.016	0.11	35.96	-	36.07	-	56.00	46.00	-19.93	-
4	2.031	0.12	38.36	-	38.48	-	56.00	46.00	-17.52	-
5	4.238	0.29	36.58	-	36.87	-	56.00	46.00	-19.13	-
6	14.039	0.73	33.10	-	33.83	-	60.00	50.00	-26.17	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

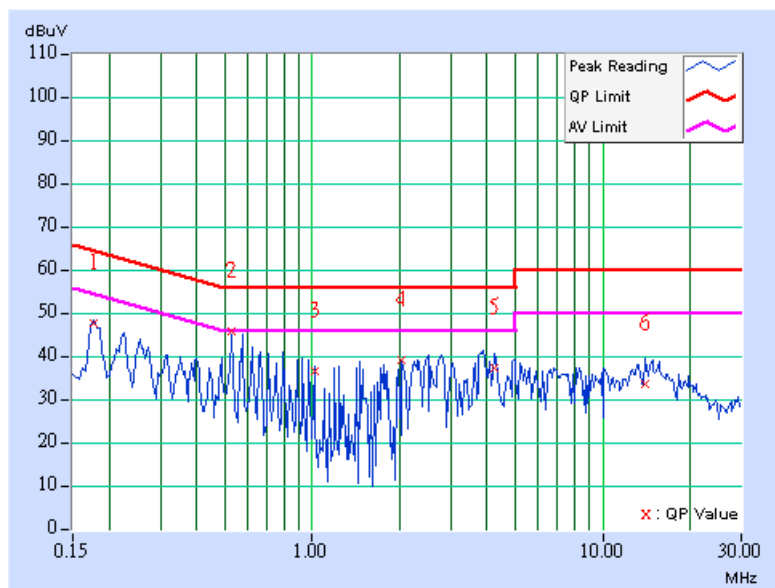

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.178	0.10	50.69	-	50.79	-	64.60	54.60	-13.81	-
2	0.353	0.10	39.43	-	39.53	-	58.89	48.89	-19.36	-
3	1.458	0.11	33.26	-	33.37	-	56.00	46.00	-22.63	-
4	2.031	0.12	32.71	-	32.83	-	56.00	46.00	-23.17	-
5	3.930	0.27	35.30	-	35.57	-	56.00	46.00	-20.43	-
6	13.468	0.60	31.94	-	32.54	-	60.00	50.00	-27.46	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

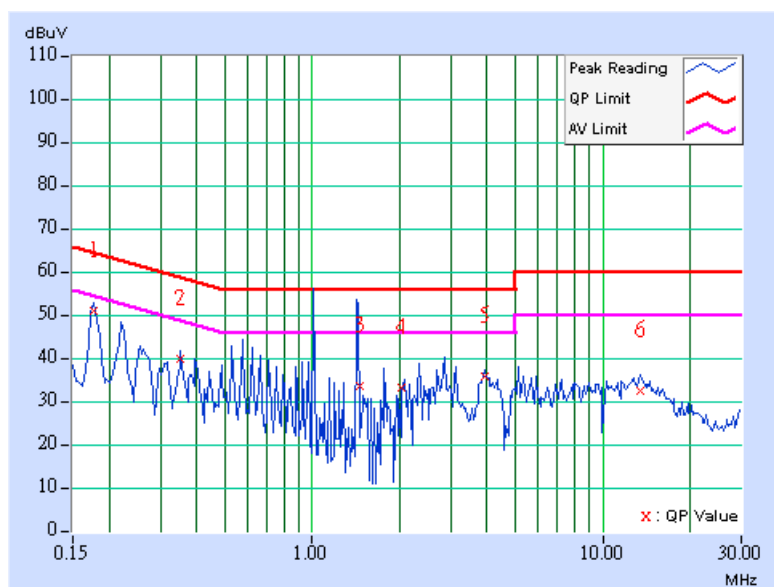

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.10	45.68	-	45.78	-	64.63	54.63	-18.85	-
2	0.573	0.10	45.23	-	45.33	-	56.00	46.00	-10.67	-
3	0.839	0.11	33.65	-	33.76	-	56.00	46.00	-22.24	-
4	1.457	0.11	38.43	-	38.54	-	56.00	46.00	-17.46	-
5	3.973	0.28	39.02	-	39.30	-	56.00	46.00	-16.70	-
6	15.402	0.79	33.62	-	34.41	-	60.00	50.00	-25.59	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

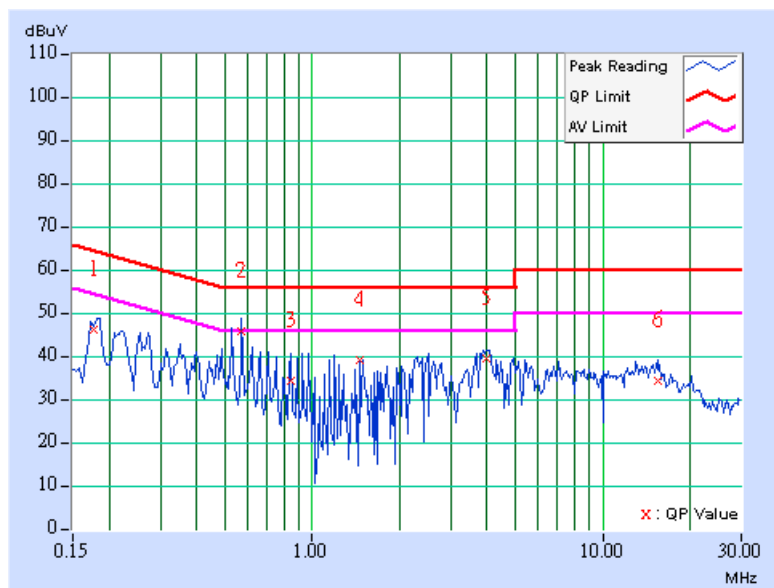

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.10	48.49	-	48.59	-	64.61	54.61	-16.02	-
2	0.264	0.10	36.21	-	36.31	-	61.31	51.31	-25.00	-
3	0.572	0.10	40.75	-	40.85	-	56.00	46.00	-15.15	-
4	1.281	0.11	34.89	-	35.00	-	56.00	46.00	-21.00	-
5	3.664	0.25	33.76	-	34.01	-	56.00	46.00	-21.99	-
6	12.583	0.56	32.61	-	33.17	-	60.00	50.00	-26.83	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

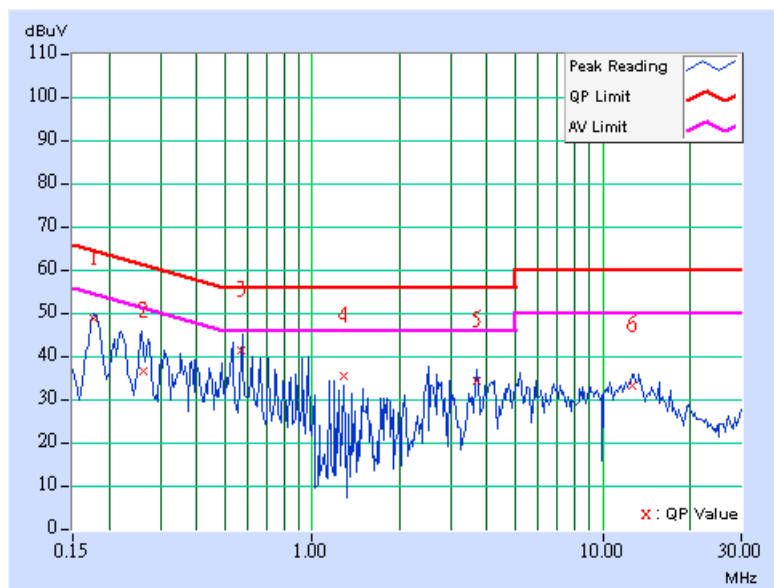

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor (dB)	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.178	0.10	44.89	-	44.99	-	64.58	54.58	-19.59	-
2	0.265	0.10	40.06	-	40.16	-	61.26	51.26	-21.10	-
3	0.573	0.10	45.55	-	45.65	-	56.00	46.00	-10.35	-
4	1.147	0.11	38.18	-	38.29	-	56.00	46.00	-17.71	-
5	4.059	0.28	40.36	-	40.64	-	56.00	46.00	-15.36	-
6	14.914	0.78	33.30	-	34.08	-	60.00	50.00	-25.92	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

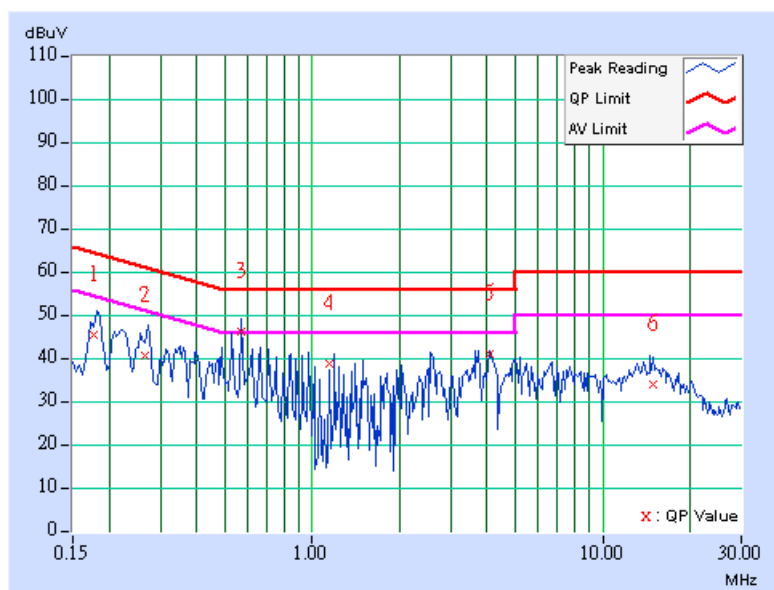

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.177	0.10	47.74	-	47.84	-	64.62
2	0.265	0.10	35.76	-	35.86	-	61.28	51.28	-25.42	-
3	0.572	0.10	40.95	-	41.05	-	56.00	46.00	-14.95	-
4	2.692	0.18	35.80	-	35.98	-	56.00	46.00	-20.02	-
5	4.766	0.30	32.73	-	33.03	-	56.00	46.00	-22.97	-
6	12.844	0.57	32.86	-	33.43	-	60.00	50.00	-26.57	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

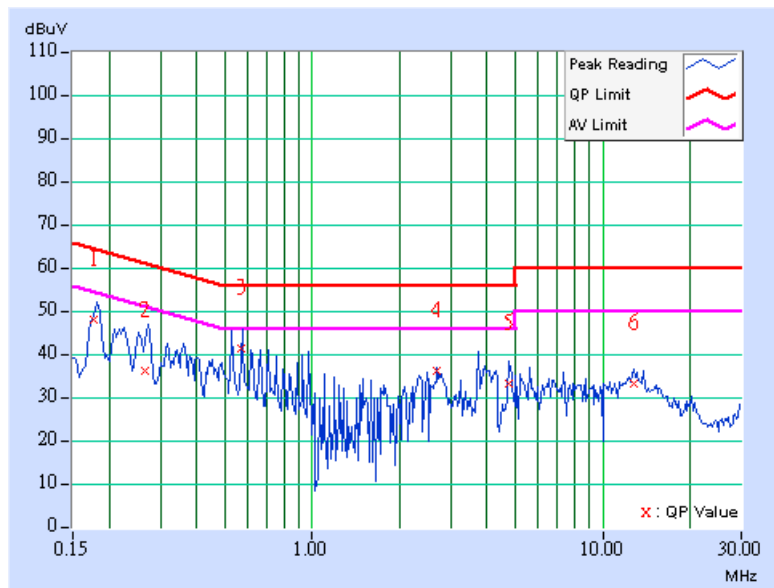


POE: EBU-201-T1

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	TEST MODE	C
TESTED BY	Dean Wang		

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.224	0.10	51.98	-	52.08	-	62.66	52.66	-10.58	-
2	0.373	0.10	42.22	-	42.32	-	58.44	48.44	-16.12	-
3	0.745	0.11	36.37	-	36.48	-	56.00	46.00	-19.52	-
4	1.344	0.11	37.09	-	37.20	-	56.00	46.00	-18.80	-
5	6.715	0.39	26.18	-	26.57	-	60.00	50.00	-33.43	-
6	17.688	0.83	31.77	-	32.60	-	60.00	50.00	-27.40	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

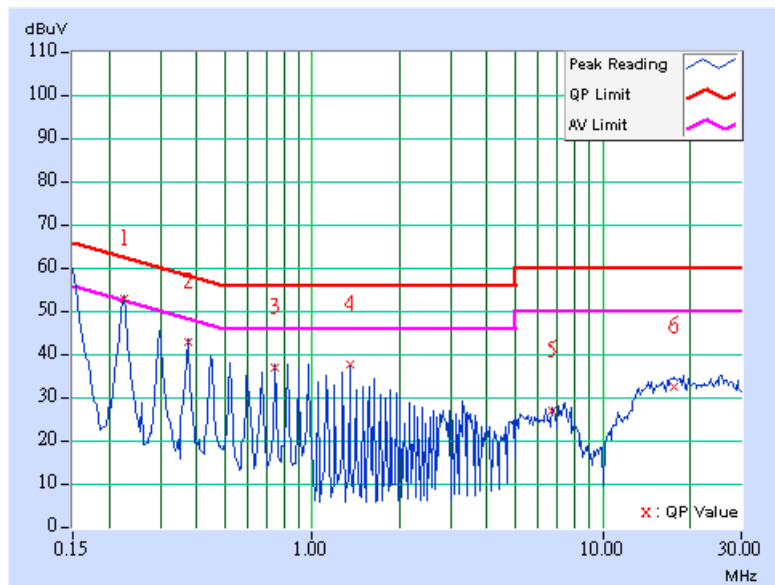

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	TEST MODE	C
TESTED BY	Dean Wang		

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.10	54.92	-	55.02	-	65.79	55.79	-10.77	-
2	0.224	0.10	52.16	-	52.26	-	62.66	52.66	-10.40	-
3	0.822	0.11	36.50	-	36.61	-	56.00	46.00	-19.39	-
4	2.167	0.13	36.58	-	36.71	-	56.00	46.00	-19.29	-
5	6.050	0.33	36.50	-	36.83	-	60.00	50.00	-23.17	-
6	18.222	0.67	32.13	-	32.80	-	60.00	50.00	-27.20	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

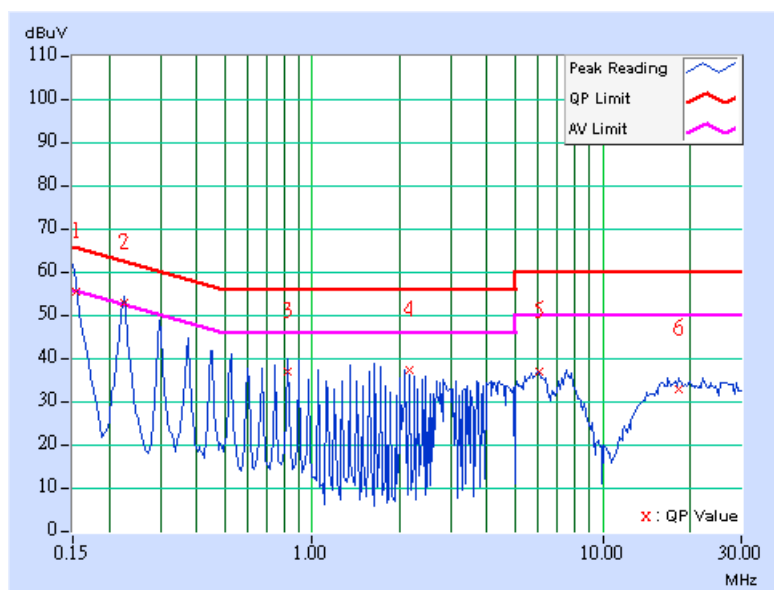

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	TEST MODE	C
TESTED BY	Dean Wang		

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.224	0.10	50.82	-	50.92	-	62.66	52.66	-11.74	-
2	0.373	0.10	41.37	-	41.47	-	58.44	48.44	-16.97	-
3	0.670	0.10	35.44	-	35.54	-	56.00	46.00	-20.46	-
4	1.641	0.12	34.59	-	34.71	-	56.00	46.00	-21.29	-
5	5.441	0.34	25.27	-	25.61	-	60.00	50.00	-34.39	-
6	26.607	0.99	32.09	-	33.08	-	60.00	50.00	-26.92	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

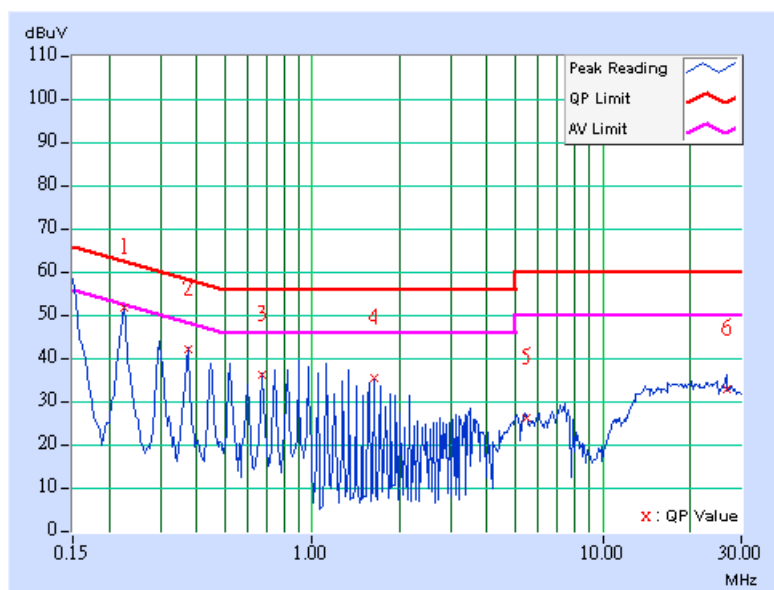

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	TEST MODE	C
TESTED BY	Dean Wang		

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.224	0.10	50.50	-	50.60	-	62.66
2	0.373	0.10	41.79	-	41.89	-	58.44	48.44	-16.55	-
3	0.822	0.11	36.20	-	36.31	-	56.00	46.00	-19.69	-
4	1.344	0.11	37.76	-	37.87	-	56.00	46.00	-18.13	-
5	5.889	0.33	35.42	-	35.75	-	60.00	50.00	-24.25	-
6	23.117	0.76	31.05	-	31.81	-	60.00	50.00	-28.19	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

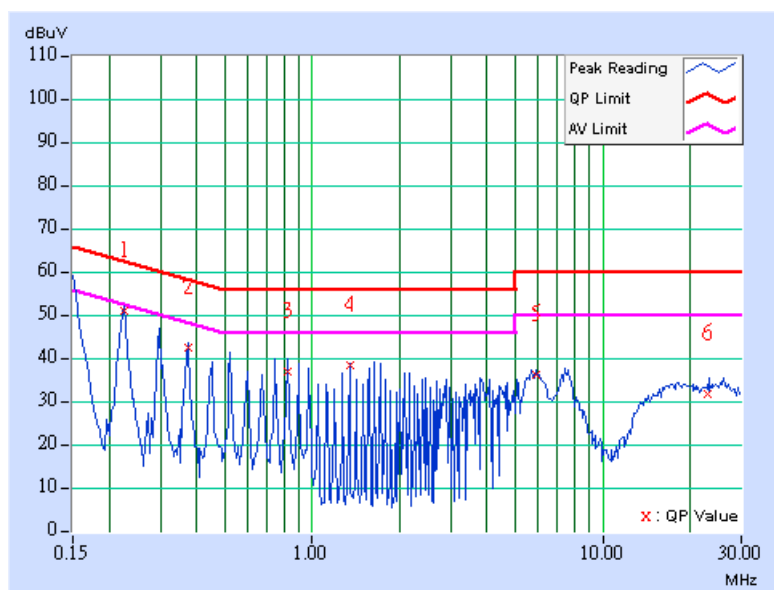

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	TEST MODE	C
TESTED BY	Dean Wang		

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.224	0.10	49.81	-	49.91	-	62.66	52.66	-12.75	-
2	0.373	0.10	40.04	-	40.14	-	58.44	48.44	-18.30	-
3	0.670	0.10	34.98	-	35.08	-	56.00	46.00	-20.92	-
4	1.043	0.11	36.81	-	36.92	-	56.00	46.00	-19.08	-
5	3.797	0.26	19.65	-	19.91	-	56.00	46.00	-36.09	-
6	15.191	0.78	31.83	-	32.61	-	60.00	50.00	-27.39	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

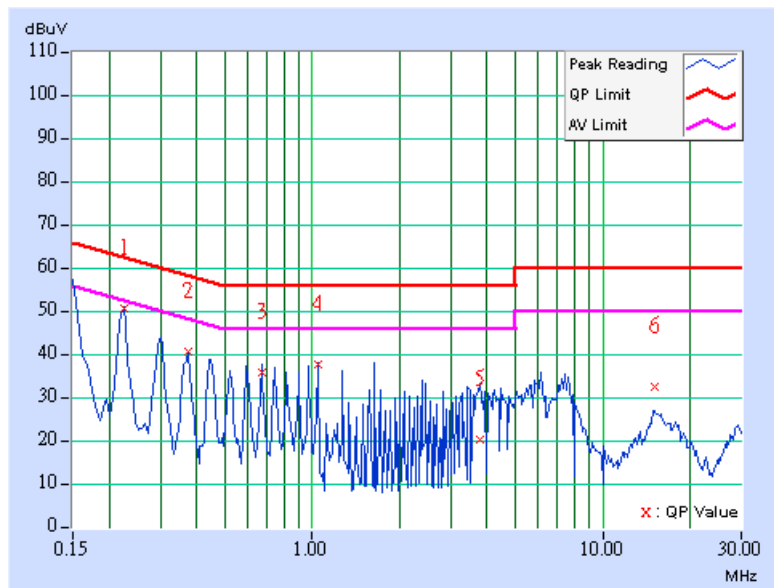

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	TEST MODE	C
TESTED BY	Dean Wang		

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.224	0.10	49.49	-	49.59	-	62.66	52.66	-13.07	-
2	0.373	0.10	41.11	-	41.21	-	58.44	48.44	-17.23	-
3	0.818	0.11	36.09	-	36.20	-	56.00	46.00	-19.80	-
4	1.563	0.12	35.20	-	35.32	-	56.00	46.00	-20.68	-
5	4.023	0.28	34.61	-	34.89	-	56.00	46.00	-21.11	-
6	26.818	0.79	31.21	-	32.00	-	60.00	50.00	-28.00	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

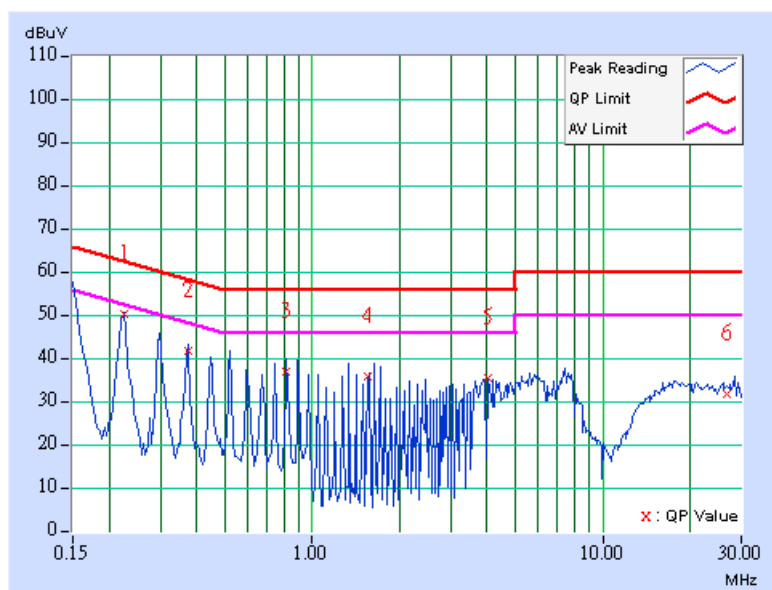

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESIB7	100212	May. 08, 2007
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Aug. 07, 2007
BILOG Antenna SCHWARZBECK	VULB9168	9168-153	Jan. 04, 2008
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-563	Jul. 26, 2007
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 19, 2007
Preamplifier Agilent	8449B	3008A01911	Sep. 13, 2007
Preamplifier Agilent	8447D	2944A10638	Dec.20,2007
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218188/218189	Nov. 14, 2007
RF signal cable Worken	8D-FB	Cable-HYCH9-01	Mar. 08, 2007
Software	ADT_Radiated_V7.6	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA
Turn Table EMCO	2087-2.03	NA	NA
Antenna Tower & Turn Table Controller EMCO	2090	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 9.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The IC Site Registration No. is IC4924A-9.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 300Hz (802.11b) or 1kHz (802.11g) for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

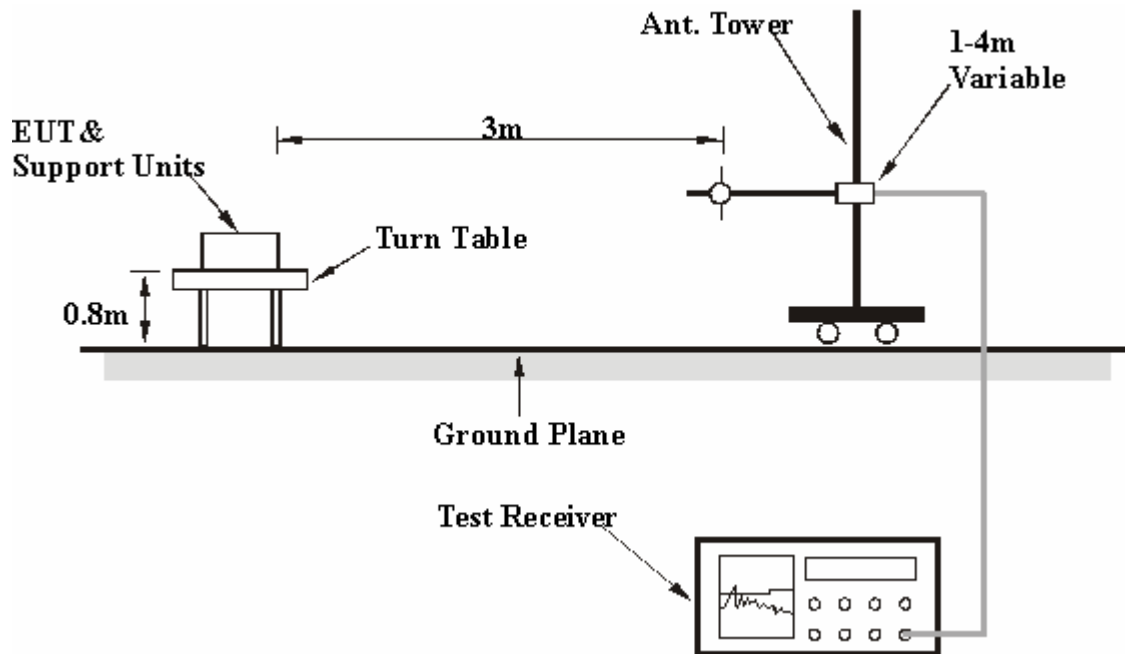

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

RADIATED WORST-CASE DATA: BELOW 1GHz

ADAPTER: 410710003CT

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Quasi-Peak
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa	TEST MODE	A
TESTED BY	Lori Chiu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	136.91	30.79 QP	43.50	-12.71	2.00 H	276	18.51	12.28
2	214.67	40.77 QP	43.50	-2.73	1.50 H	111	30.36	10.41
3	249.66	34.50 QP	46.00	-11.50	1.00 H	130	22.94	11.56
4	500.42	35.11 QP	46.00	-10.89	2.00 H	276	16.49	18.62
5	751.18	33.91 QP	46.00	-12.09	1.50 H	80	10.00	23.91
6	760.90	33.28 QP	46.00	-12.72	2.00 H	276	9.36	23.93
7	840.60	38.03 QP	46.00	-7.97	1.50 H	111	13.54	24.49

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	51.38	31.74 QP	40.00	-8.26	1.00 V	17	18.05	13.70
2	214.67	39.48 QP	43.50	-4.02	1.00 V	48	29.07	10.41
3	249.66	34.35 QP	46.00	-11.65	1.00 V	17	22.79	11.56
4	269.10	32.99 QP	46.00	-13.01	1.00 V	149	19.91	13.08
5	500.42	32.88 QP	46.00	-13.12	1.00 V	149	14.25	18.62
6	751.18	34.14 QP	46.00	-11.86	1.50 V	73	10.23	23.91
7	760.90	32.61 QP	46.00	-13.39	1.00 V	149	8.69	23.93
8	799.78	31.55 QP	46.00	-14.45	1.50 V	54	7.57	23.98

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

ADAPTER: AF1275-B

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Quasi-Peak
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa	TEST MODE	B
TESTED BY	Lori Chiu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	63.05	31.38 QP	46.00	-8.62	1.50 H	124	18.70	12.68
2	216.61	44.18 QP	46.00	-1.82	1.50 H	124	33.12	11.06
3	245.77	43.78 QP	46.00	-2.22	1.50 H	124	31.42	12.36
4	323.53	38.22 QP	46.00	-7.78	2.00 H	18	24.30	13.92
5	762.85	38.66 QP	46.00	-7.34	2.00 H	79	15.16	23.49
6	842.55	37.00 QP	46.00	-9.00	1.50 H	124	12.23	24.77

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	43.61	38.75 QP	40.00	-1.25	2.00 V	204	26.43	12.32
2	92.20	38.48 QP	43.50	-5.02	1.50 V	110	29.43	9.05
3	117.47	37.31 QP	43.50	-6.19	1.50 V	110	26.05	11.26
4	216.61	44.21 QP	46.00	-1.79	1.50 V	110	33.15	11.06
5	243.83	41.60 QP	46.00	-4.40	1.50 V	110	29.33	12.28
6	269.10	40.94 QP	46.00	-5.06	1.50 V	110	28.09	12.85

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

POE: EBU-201-T1

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Quasi-Peak
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa	TEST MODE	C
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	214.67	38.20 QP	43.50	-5.30	1.00 H	99	27.79	10.41
2	249.66	38.31 QP	46.00	-7.69	1.00 H	80	26.75	11.56
3	500.42	37.48 QP	46.00	-8.52	2.00 H	137	18.86	18.62
4	751.18	34.27 QP	46.00	-11.73	1.50 H	73	10.36	23.91
5	799.78	34.07 QP	46.00	-11.93	1.50 H	92	10.09	23.98
6	840.60	36.89 QP	46.00	-9.11	1.50 H	23	12.40	24.49

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.66	34.21 QP	40.00	-5.79	1.00 V	206	20.09	14.11
2	103.87	26.72 QP	43.50	-16.78	1.00 V	143	18.05	8.67
3	214.67	30.06 QP	43.50	-13.44	1.00 V	225	19.65	10.41
4	249.66	36.15 QP	46.00	-9.85	1.00 V	35	24.58	11.56
5	500.42	32.34 QP	46.00	-13.66	1.00 V	143	13.72	18.62
6	541.24	29.33 QP	46.00	-16.67	1.00 V	92	9.91	19.42
7	760.90	31.46 QP	46.00	-14.54	1.00 V	143	7.54	23.93
8	840.60	29.75 QP	46.00	-16.25	1.00 V	124	5.26	24.49

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	1Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2320.00	56.21 PK	74.00	-17.79	1.06 H	67	24.93	31.28
1	2320.00	45.03 AV	54.00	-8.97	1.06 H	67	13.75	31.28
2	2390.00	55.39 PK	74.00	-18.61	1.06 H	67	24.18	31.21
2	2390.00	44.22 AV	54.00	-9.78	1.06 H	67	13.01	31.21
3	*2412.00	99.91 PK			1.06 H	67	68.71	31.20
3	*2412.00	95.30 AV			1.06 H	67	64.10	31.20
4	4824.00	50.03 PK	74.00	-23.97	1.51 H	132	13.60	36.42
4	4824.00	44.69 AV	54.00	-9.31	1.51 H	132	8.26	36.42

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2320.00	58.19 PK	74.00	-15.81	1.14 V	94	26.91	31.28
1	2320.00	48.77 AV	54.00	-5.23	1.14 V	94	17.49	31.28
2	2360.00	57.63 PK	74.00	-16.37	1.12 V	138	26.39	31.24
2	2360.00	46.72 AV	54.00	-7.28	1.12 V	138	15.48	31.24
3	2390.00	56.87 PK	74.00	-17.13	1.16 V	209	25.66	31.21
3	2390.00	45.35 AV	54.00	-8.65	1.16 V	209	14.14	31.21
4	*2412.00	110.47 PK			1.16 V	183	79.27	31.20
4	*2412.00	105.90 AV			1.16 V	183	74.70	31.20
5	4824.00	52.86 PK	74.00	-21.14	1.17 V	109	16.43	36.42
5	4824.00	49.50 AV	54.00	-4.50	1.17 V	109	13.07	36.42

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	1Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2320.00	55.84 PK	74.00	-18.16	1.21 H	64	24.56	31.28
1	2320.00	45.98 AV	54.00	-8.02	1.21 H	64	14.70	31.28
2	*2437.00	99.86 PK			1.03 H	71	68.65	31.21
2	*2437.00	95.27 AV			1.03 H	71	64.06	31.21
3	4874.00	50.54 PK	74.00	-23.46	1.15 H	129	14.01	36.53
3	4874.00	45.82 AV	54.00	-8.18	1.15 H	129	9.29	36.53

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2320.00	58.43 PK	74.00	-15.57	1.13 V	105	27.15	31.28
1	2320.00	48.96 AV	54.00	-5.04	1.13 V	105	17.68	31.28
2	2360.00	57.24 PK	74.00	-16.76	1.11 V	126	26.00	31.24
2	2360.00	46.88 AV	54.00	-7.12	1.11 V	126	15.64	31.24
3	*2437.00	110.43 PK			1.15 V	190	79.22	31.21
3	*2437.00	105.76 AV			1.15 V	190	74.55	31.21
4	4874.00	53.57 PK	74.00	-20.43	1.05 V	113	17.04	36.53
4	4874.00	50.54 AV	54.00	-3.46	1.05 V	113	14.01	36.53

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	1Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2320.00	56.19 PK	74.00	-17.81	1.10 H	58	24.91	31.28
1	2320.00	46.12 AV	54.00	-7.88	1.10 H	58	14.84	31.28
2	*2462.00	99.81 PK			1.04 H	23	68.59	31.22
2	*2462.00	95.22 AV			1.04 H	23	64.00	31.22
3	2487.00	55.29 PK	74.00	-18.71	1.04 H	31	24.06	31.23
3	2487.00	45.84 AV	54.00	-8.16	1.04 H	31	14.61	31.23
4	4824.00	50.72 PK	74.00	-23.28	1.07 H	142	14.29	36.42
4	4824.00	46.03 AV	54.00	-7.97	1.07 H	142	9.60	36.42

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2320.00	58.49 PK	74.00	-15.51	1.16 V	86	27.21	31.28
1	2320.00	49.11 AV	54.00	-4.89	1.16 V	86	17.83	31.28
2	2360.00	57.33 PK	74.00	-16.67	1.11 V	99	26.09	31.24
2	2360.00	47.20 AV	54.00	-6.80	1.11 V	99	15.96	31.24
3	*2462.00	110.40 PK			1.16 V	227	79.18	31.22
3	*2462.00	105.62 AV			1.16 V	227	74.40	31.22
4	2487.00	60.93 PK	74.00	-13.07	1.13 V	238	29.70	31.23
4	2487.00	50.90 AV	54.00	-3.10	1.13 V	238	19.67	31.23
5	4924.00	53.50 PK	74.00	-20.50	1.02 V	112	16.86	36.63
5	4924.00	50.20 AV	54.00	-3.80	1.02 V	112	13.56	36.63

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * " : Fundamental frequency.

802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2320.00	56.45 PK	74.00	-17.55	1.18 H	146	25.17	31.28
1	2320.00	45.56 AV	54.00	-8.44	1.18 H	146	14.28	31.28
2	2390.00	56.08 PK	74.00	-17.92	1.15 H	145	24.87	31.21
2	2390.00	46.50 AV	54.00	-7.50	1.15 H	145	15.29	31.21
3	*2412.00	100.01 PK			1.18 H	144	68.81	31.20
3	*2412.00	90.40 AV			1.18 H	144	59.20	31.20
4	4824.00	46.10 PK	74.00	-27.90	1.16 H	162	9.67	36.42
4	4824.00	33.25 AV	54.00	-20.75	1.16 H	162	-3.18	36.42

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2280.00	60.10 PK	74.00	-13.90	1.17 V	136	28.81	31.29
1	2280.00	50.18 AV	54.00	-3.82	1.17 V	136	18.89	31.29
2	2320.00	59.60 PK	74.00	-14.40	1.16 V	87	28.32	31.28
2	2320.00	51.85 AV	54.00	-2.15	1.16 V	87	20.57	31.28
3	2360.00	59.27 PK	74.00	-14.73	1.15 V	268	28.03	31.24
3	2360.00	49.88 AV	54.00	-4.12	1.15 V	268	18.64	31.24
4	2390.00	70.32 PK	74.00	-3.68	1.11 V	92	39.11	31.21
4	2390.00	52.22 AV	54.00	-1.78	1.11 V	92	21.01	31.21
5	*2412.00	111.78 PK			1.12 V	87	80.58	31.20
5	*2412.00	101.49 AV			1.12 V	87	70.29	31.20
6	4824.00	51.65 PK	74.00	-22.35	1.34 V	114	15.22	36.42
6	4824.00	35.79 AV	54.00	-18.21	1.34 V	114	-0.64	36.42

- RMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2320.00	58.00 PK	74.00	-16.00	1.32 H	167	26.72	31.28
1	2320.00	46.77 AV	54.00	-7.23	1.32 H	167	15.49	31.28
2	2360.00	56.76 PK	74.00	-17.24	1.23 H	150	25.52	31.24
2	2360.00	45.50 AV	54.00	-8.50	1.23 H	150	14.26	31.24
3	*2437.00	101.14 PK			1.20 H	149	69.93	31.21
3	*2437.00	91.07 AV			1.20 H	149	59.86	31.21
4	4874.00	47.90 PK	74.00	-26.10	1.18 H	264	11.37	36.53
4	4874.00	34.55 AV	54.00	-19.45	1.18 H	264	-1.98	36.53

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2320.00	59.26 PK	74.00	-14.74	1.17 V	138	27.98	31.28
1	2320.00	52.20 AV	54.00	-1.80	1.17 V	138	20.92	31.28
2	2360.00	59.18 PK	74.00	-14.82	1.13 V	87	27.94	31.24
2	2360.00	50.76 AV	54.00	-3.24	1.13 V	87	19.52	31.24
3	*2437.00	111.70 PK			1.16 V	181	80.49	31.21
3	*2437.00	101.66 AV			1.16 V	181	70.45	31.21
4	4874.00	52.64 PK	74.00	-21.36	1.28 V	206	16.11	36.53
4	4874.00	36.87 AV	54.00	-17.13	1.28 V	206	0.34	36.53

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2320.00	58.09 PK	74.00	-15.91	1.38 H	83	26.81	31.28
1	2320.00	46.67 AV	54.00	-7.33	1.38 H	83	15.39	31.28
2	2360.00	57.03 PK	74.00	-16.97	1.41 H	85	25.79	31.24
2	2360.00	46.16 AV	54.00	-7.84	1.41 H	85	14.92	31.24
3	*2462.00	100.06 PK			1.04 H	146	68.84	31.22
3	*2462.00	90.13 AV			1.04 H	146	58.91	31.22
4	2483.50	59.87 PK	74.00	-14.13	1.16 H	148	28.64	31.23
4	2483.50	46.89 AV	54.00	-7.11	1.16 H	148	15.66	31.23
5	4924.00	46.27 PK	74.00	-27.73	1.21 H	350	9.64	36.63
5	4924.00	33.48 AV	54.00	-20.52	1.21 H	350	-3.15	36.63

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2280.00	59.88 PK	74.00	-14.12	1.16 V	139	28.59	31.29
1	2280.00	50.82 AV	54.00	-3.18	1.16 V	139	19.53	31.29
2	2320.00	59.81 PK	74.00	-14.19	1.18 V	157	28.53	31.28
2	2320.00	52.78 AV	54.00	-1.22	1.18 V	157	21.50	31.28
3	2360.00	58.94 PK	74.00	-15.06	1.14 V	85	27.70	31.24
3	2360.00	50.76 AV	54.00	-3.24	1.14 V	85	19.52	31.24
4	*2462.00	111.65 PK			1.12 V	180	80.43	31.22
4	*2462.00	101.29 AV			1.12 V	180	70.07	31.22
5	2483.50	68.75 PK	74.00	-5.25	1.18 V	214	37.52	31.23
5	2483.50	52.21 AV	54.00	-1.79	1.18 V	214	20.98	31.23
6	4924.00	51.34 PK	74.00	-22.66	1.28 V	204	14.71	36.63
6	4924.00	35.56 AV	54.00	-18.44	1.28 V	204	-1.07	36.63

- RMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * " : Fundamental frequency.



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP40	100040	Jun. 07, 2007

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

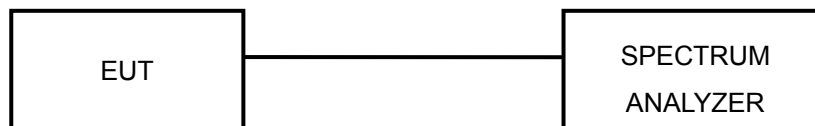

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.3.7 TEST RESULTS

802.11b DSSS MODULATION


MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	9.12	0.5	PASS
6	2437	9.08	0.5	PASS
11	2462	9.12	0.5	PASS


CH1

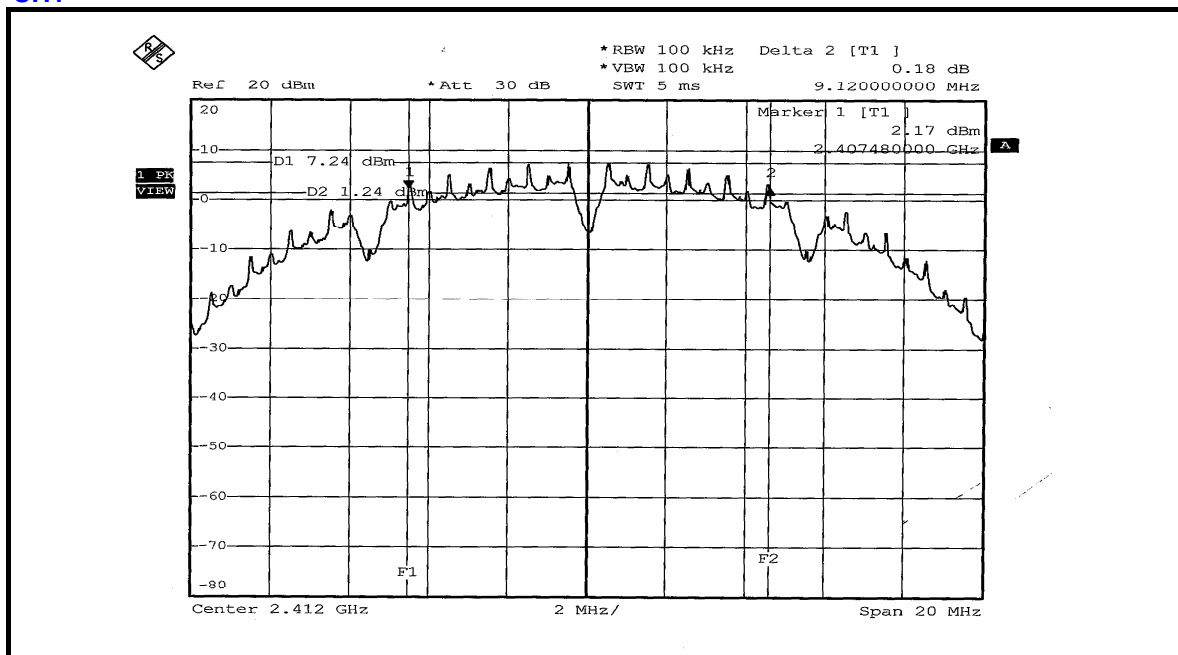

CH6

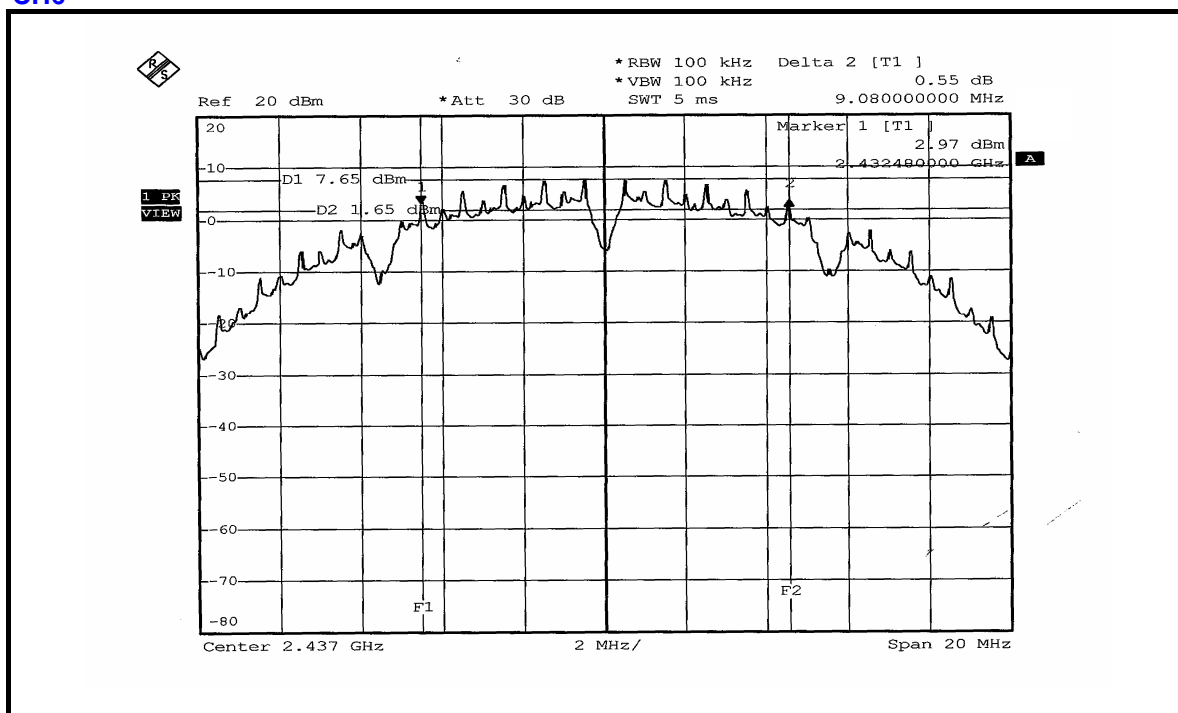

CH11

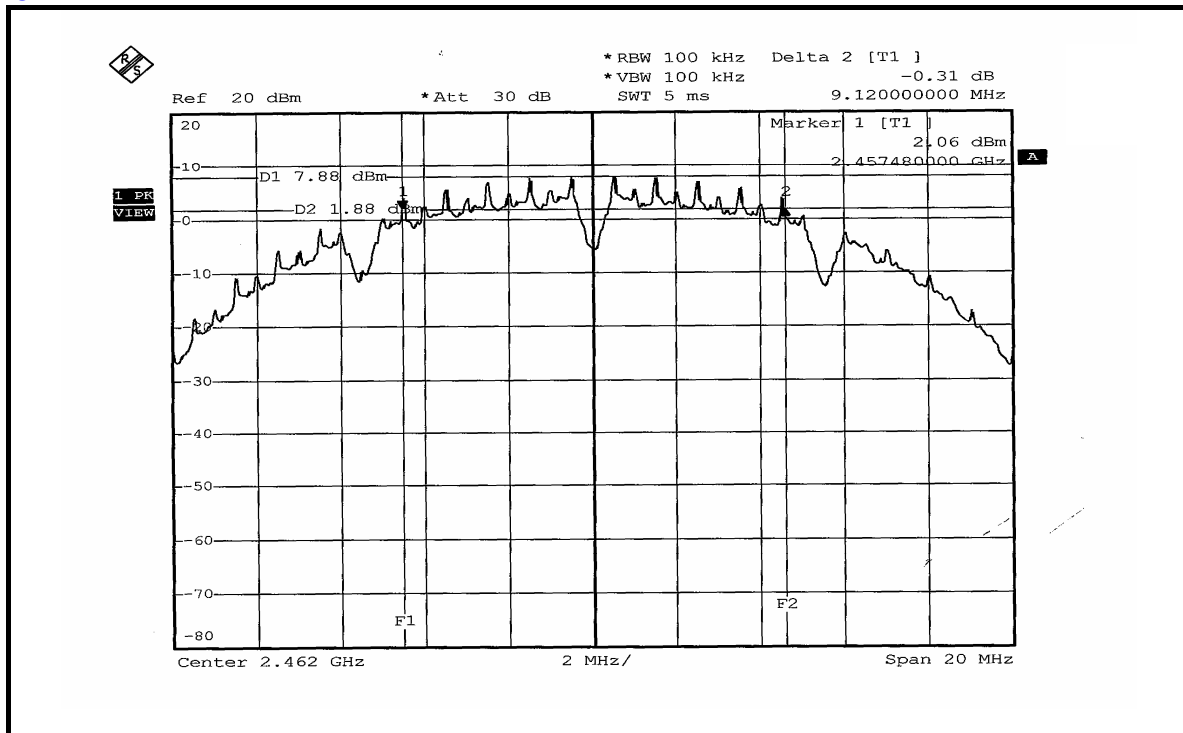




802.11g OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.04	0.5	PASS
6	2437	16.08	0.5	PASS
11	2462	16.08	0.5	PASS


CH1

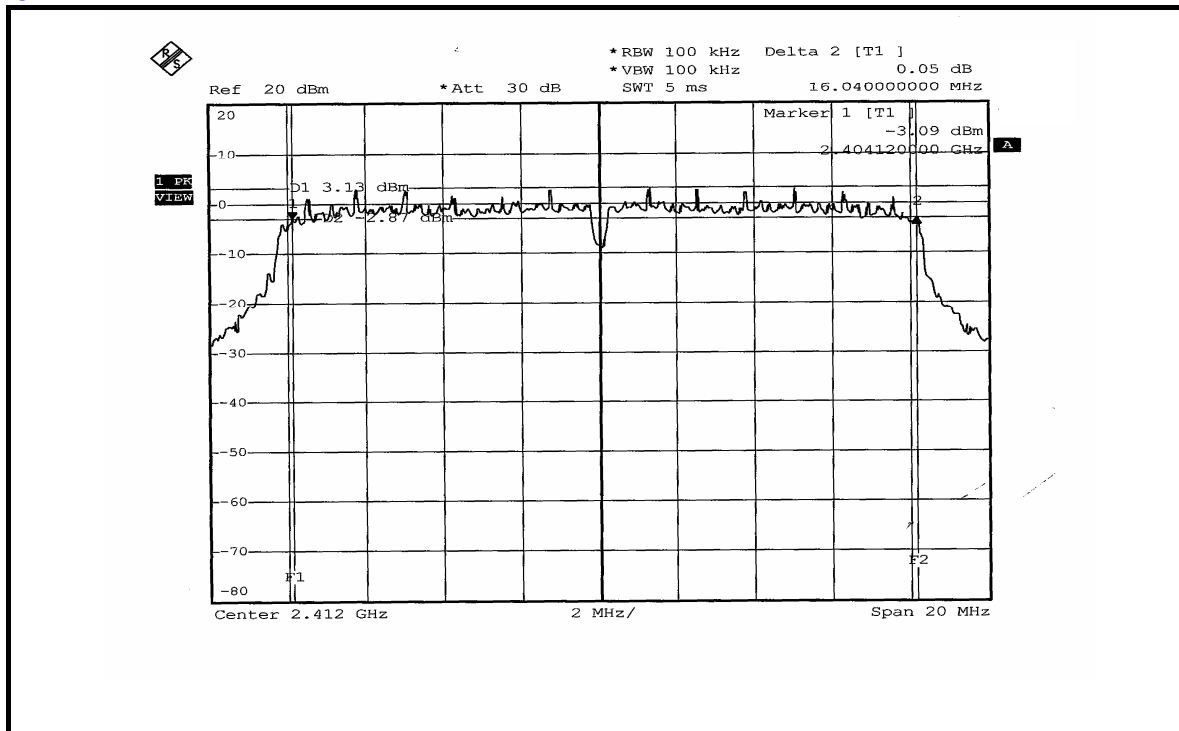

CH6

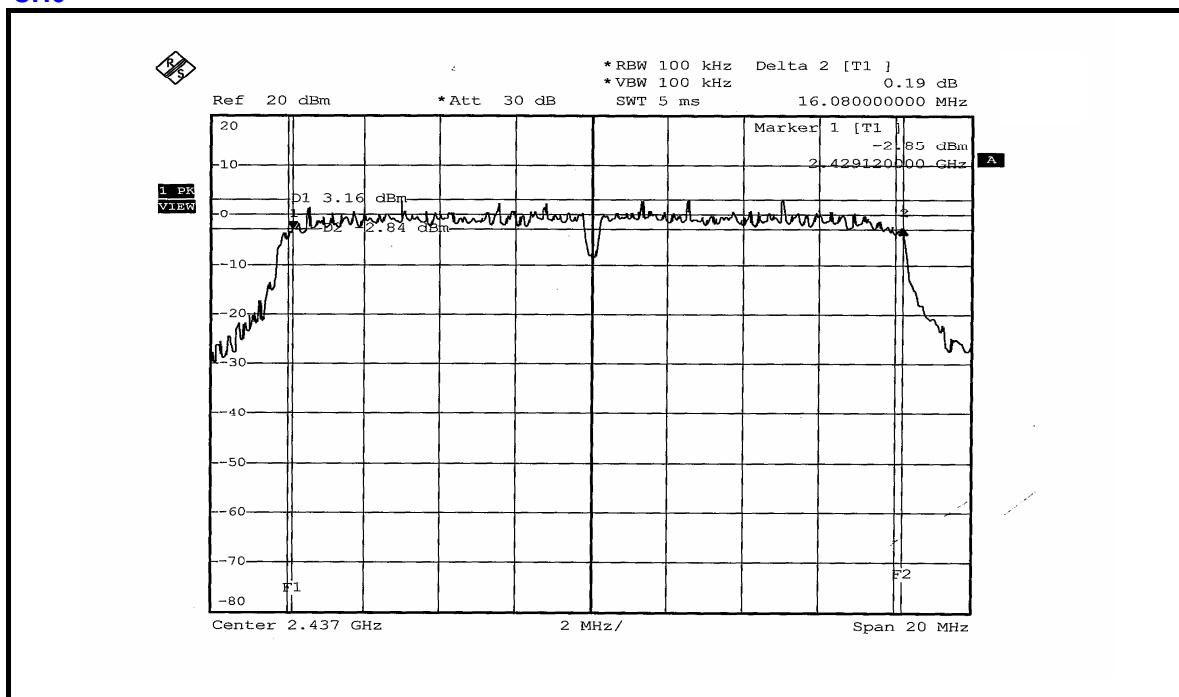

CH11

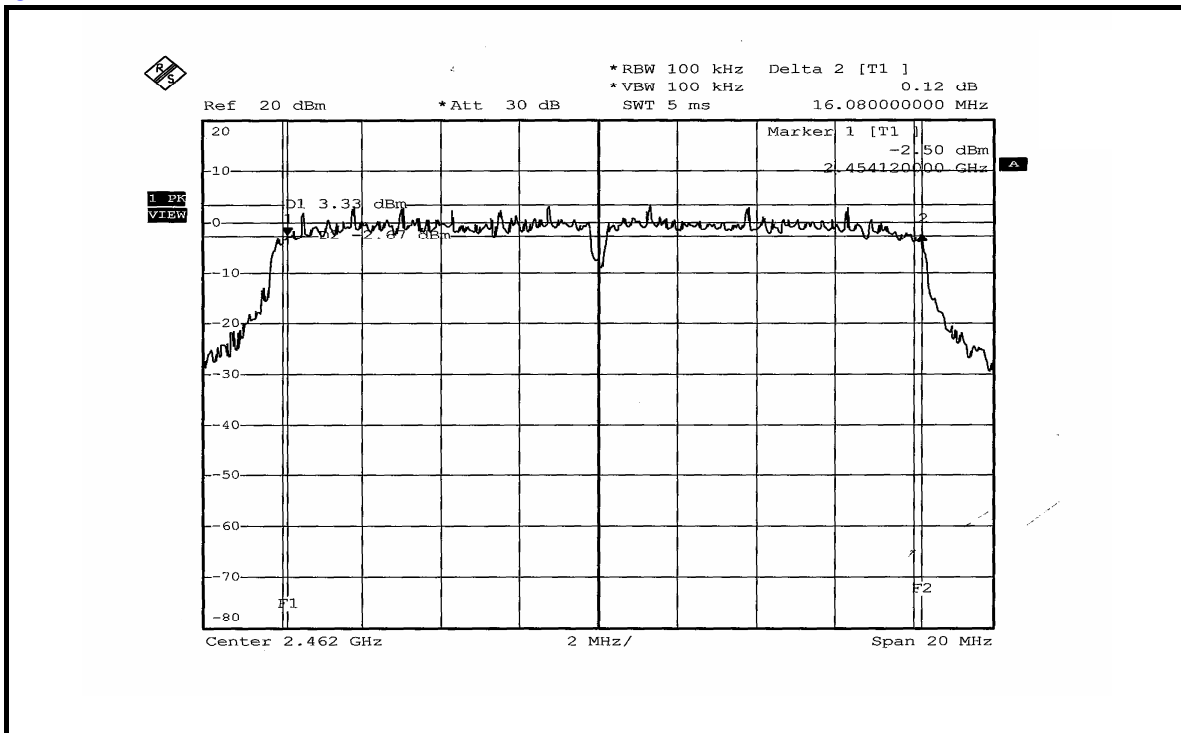



4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP40	100040	Jun. 07, 2007
Anritsu Synthesized Signal Generator	68247B	984703	May 08, 2007
TEKTRONIX OSCILLOSCOPE	TDS1012	C037299	Nov. 27, 2007
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to peak the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



4.4.7 TEST RESULTS

802.11b DSSS MODULATION

MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	50.466	17.03	30	PASS
6	2437	50.119	17.00	30	PASS
11	2462	50.466	17.03	30	PASS

802.11g OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	64.121	18.07	30	PASS
6	2437	64.417	18.09	30	PASS
11	2462	63.387	18.02	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP40	100040	Jun. 07, 2007

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

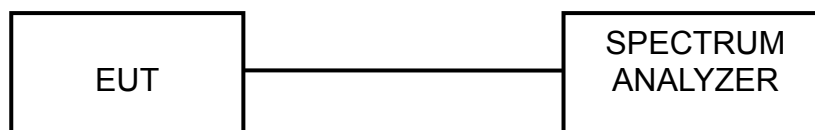

4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6




4.5.7 TEST RESULTS

802.11b DSSS MODULATION


MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	6.40	8	PASS
6	2437	6.69	8	PASS
11	2462	6.95	8	PASS


CH1

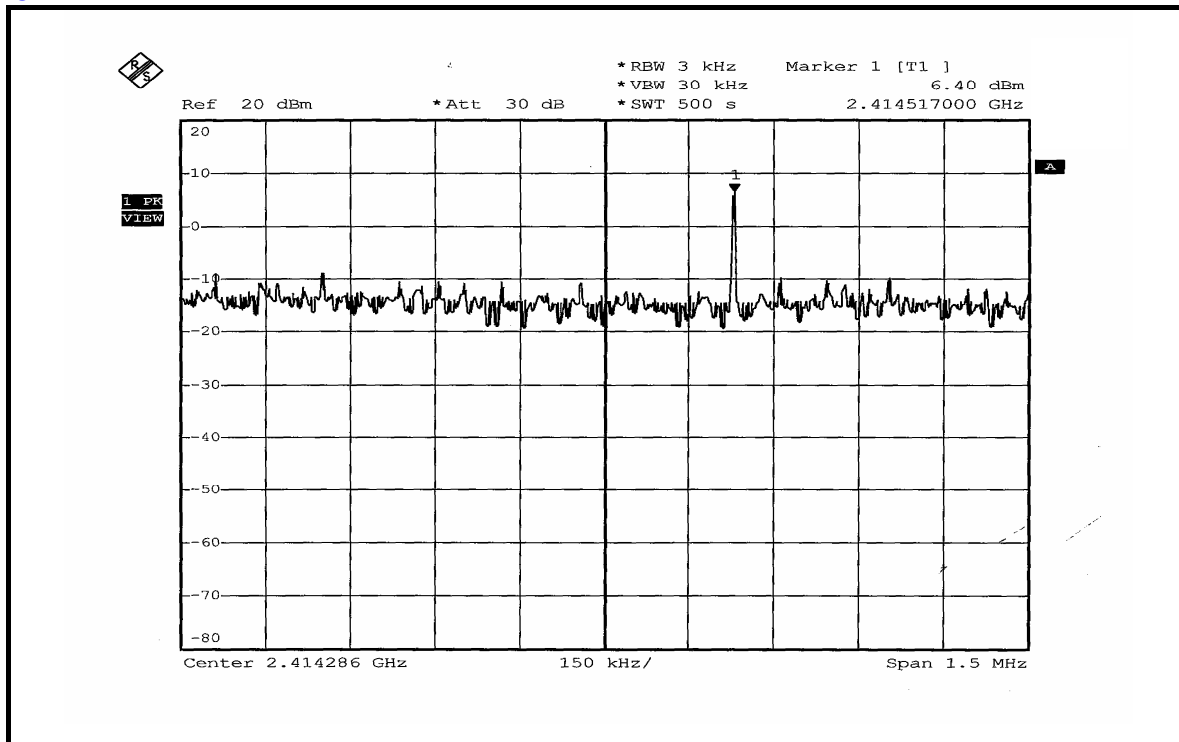

CH6

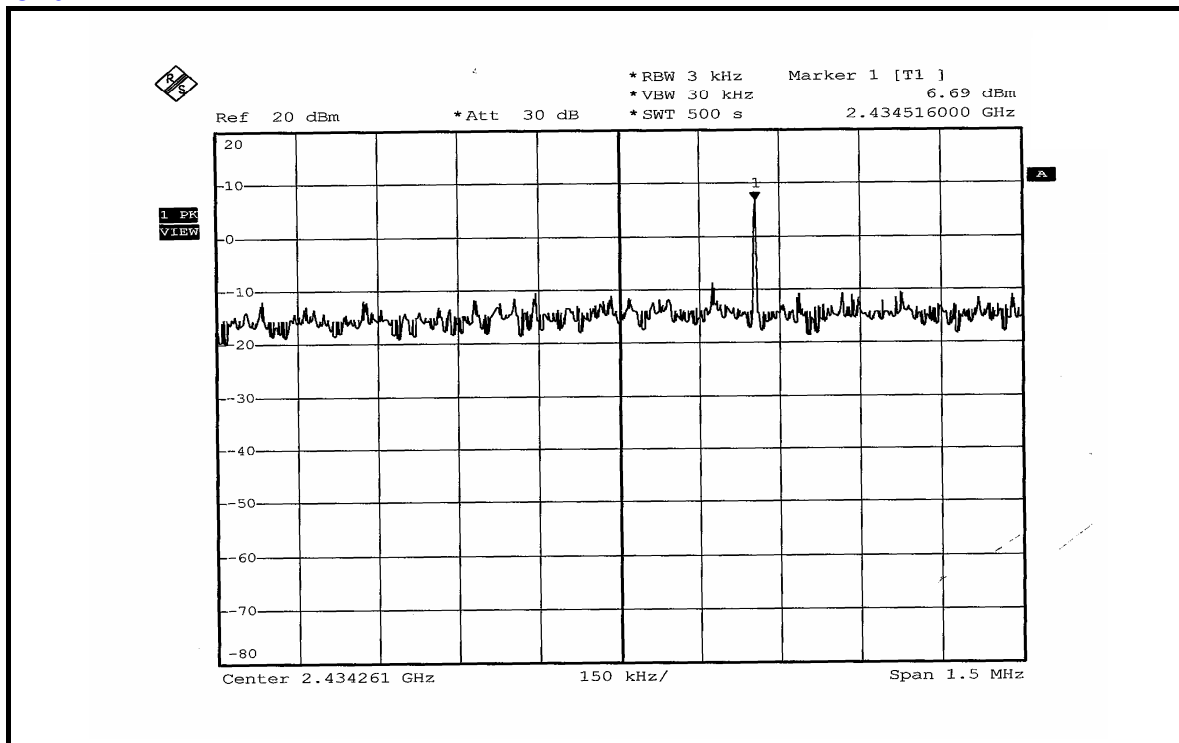

CH11

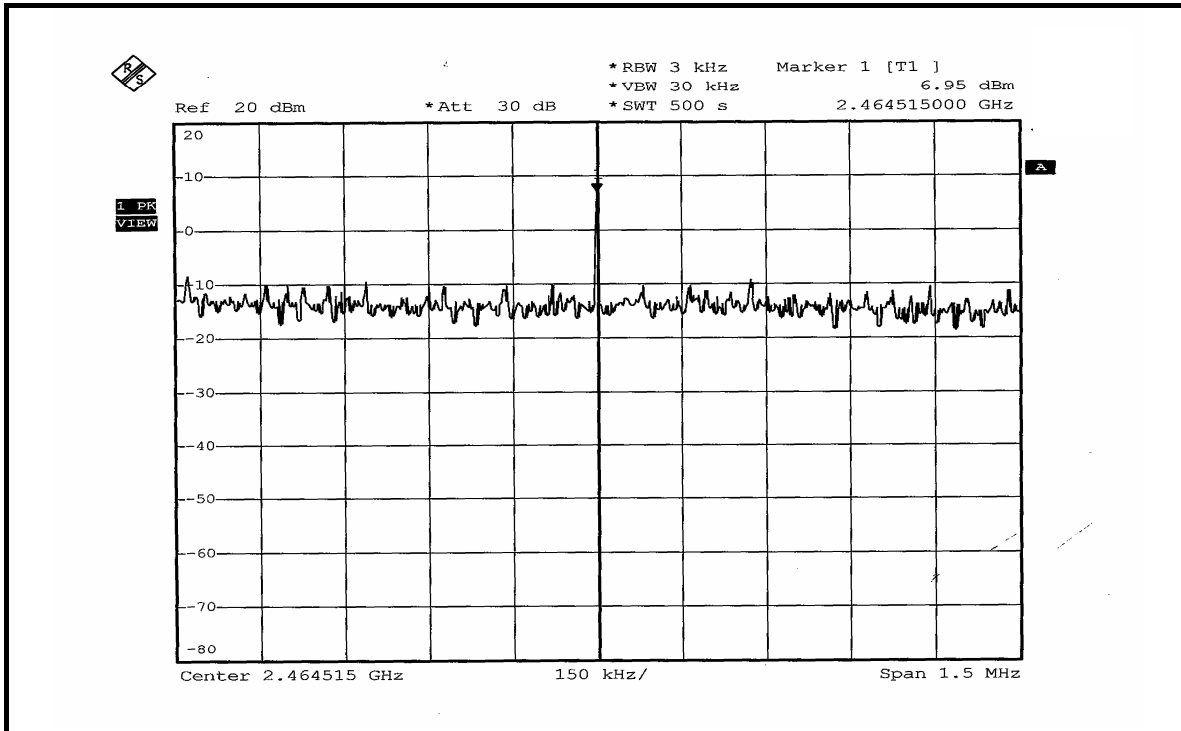




802.11g OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-13.02	8	PASS
6	2437	-12.85	8	PASS
11	2462	-12.70	8	PASS


CH1

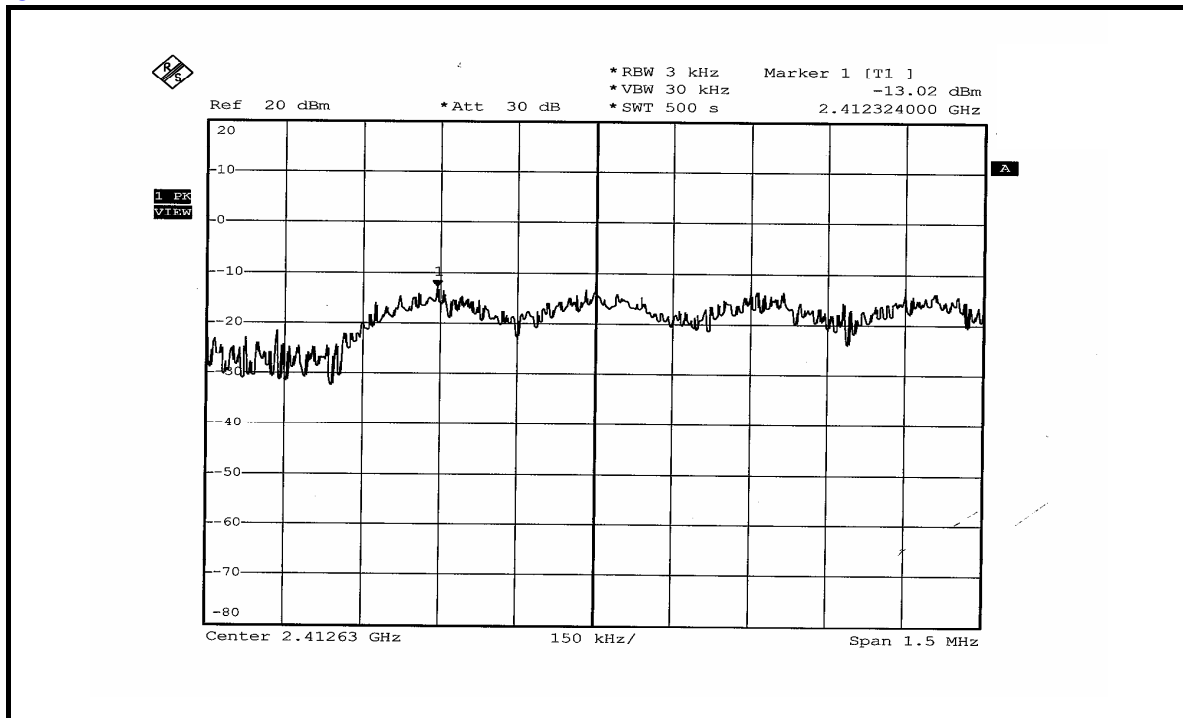

CH6

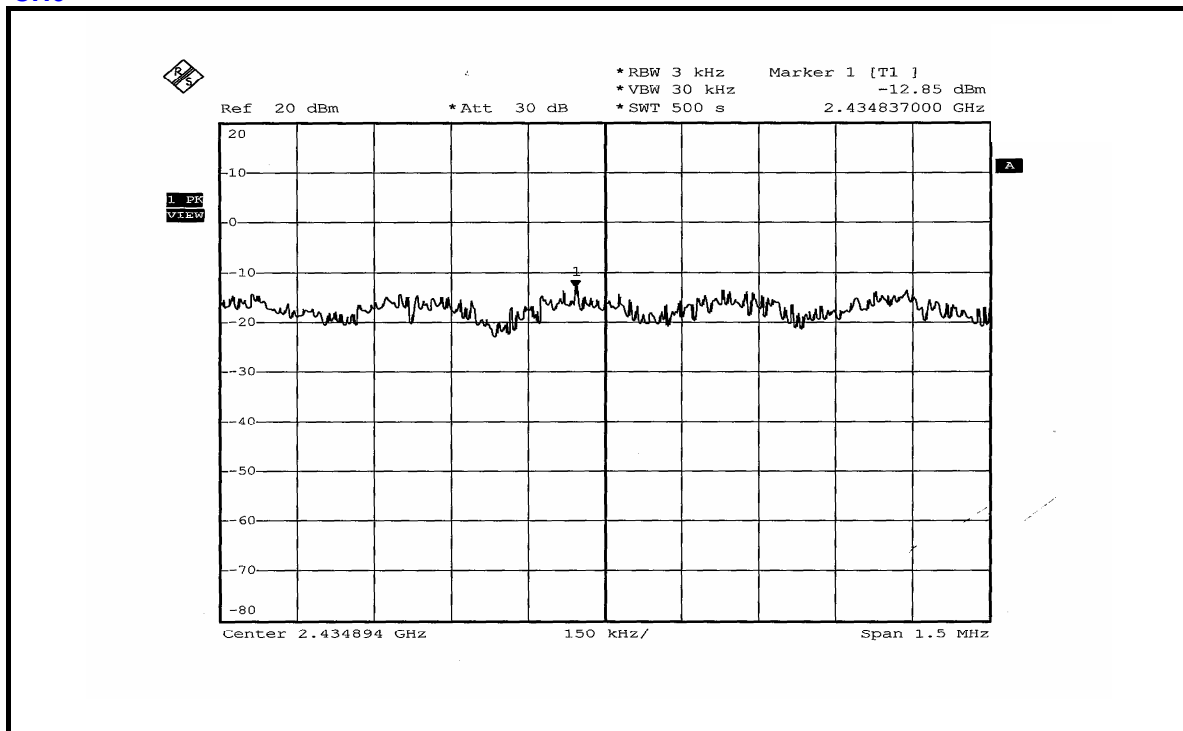

CH11

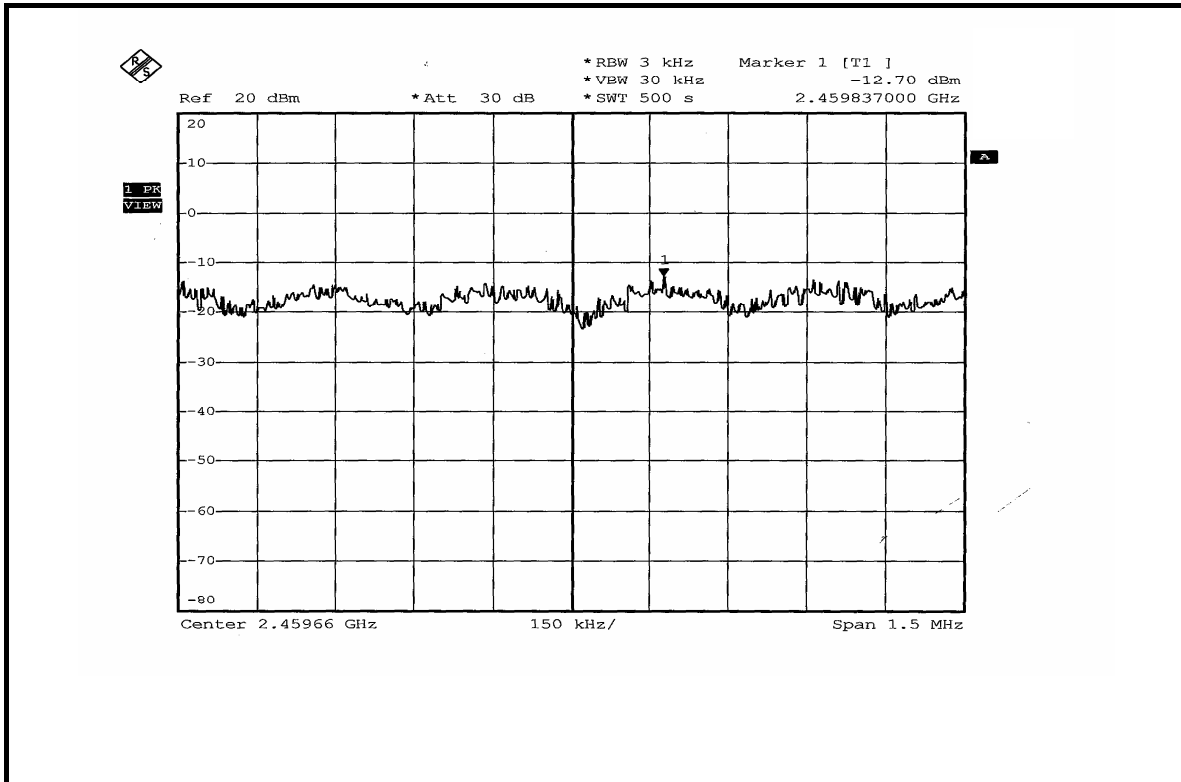



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP40	100040	Jun. 07, 2007

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded. The spectrum plots (Peak RBW=VBW=100kHz; Average RBW=1MHz, VBW=300Hz or Average RBW=1MHz, VBW=1 kHz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.6 TEST RESULTS

The spectrum plots are attached on the following 12 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS MODULATION



NOTE 1: The band edge emission plot of DSSS technique on the next page shows 54.46dBc between carrier maximum power and local maximum emission in restrict band (2.36000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 110.47dBuV/m (Peak), so the maximum field strength in restrict band is $110.47 - 54.46 = 56.01$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of DSSS technique on the next page shows 57.65dBc between carrier maximum power and local maximum emission in restrict band (2.36000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 105.90dBuV/m (Average), so the maximum field strength in restrict band is $105.90 - 57.65 = 48.25$ dBuV/m which is under 54dBuV/m limit.



NOTE 2: The band edge emission plot of DSSS technique on the next second page shows 56.80dBc between carrier maximum power and local maximum emission in restrict band (2.48714GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 110.40dBuV/m (Peak), so the maximum field strength in restrict band is $110.40 - 56.80 = 53.60$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot of DSSS technique on the next third page shows 61.54dBc between carrier maximum power and local maximum emission in restrict band (2.48674GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 105.62dBuV/m (Average), so the maximum field strength in restrict band is $105.62 - 61.54 = 44.08$ dBuV/m which is under 54dBuV/m limit.

802.11b DSSS MODULATION

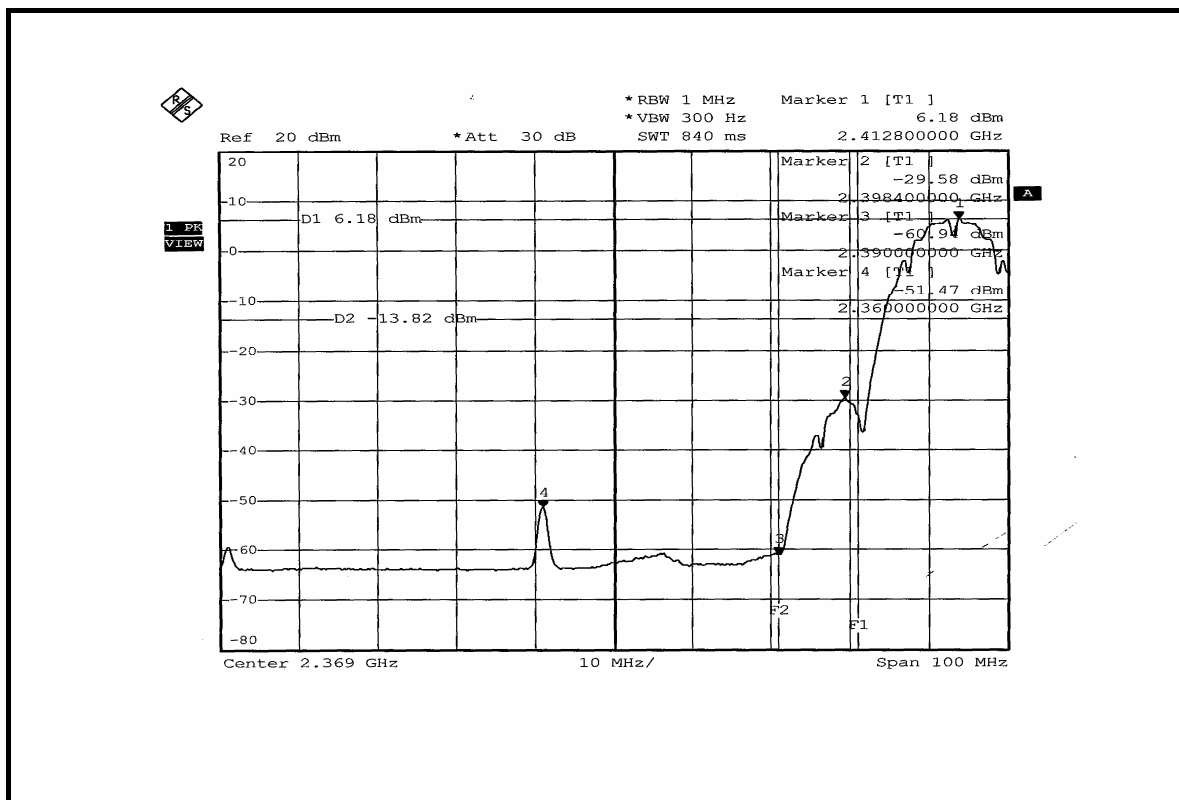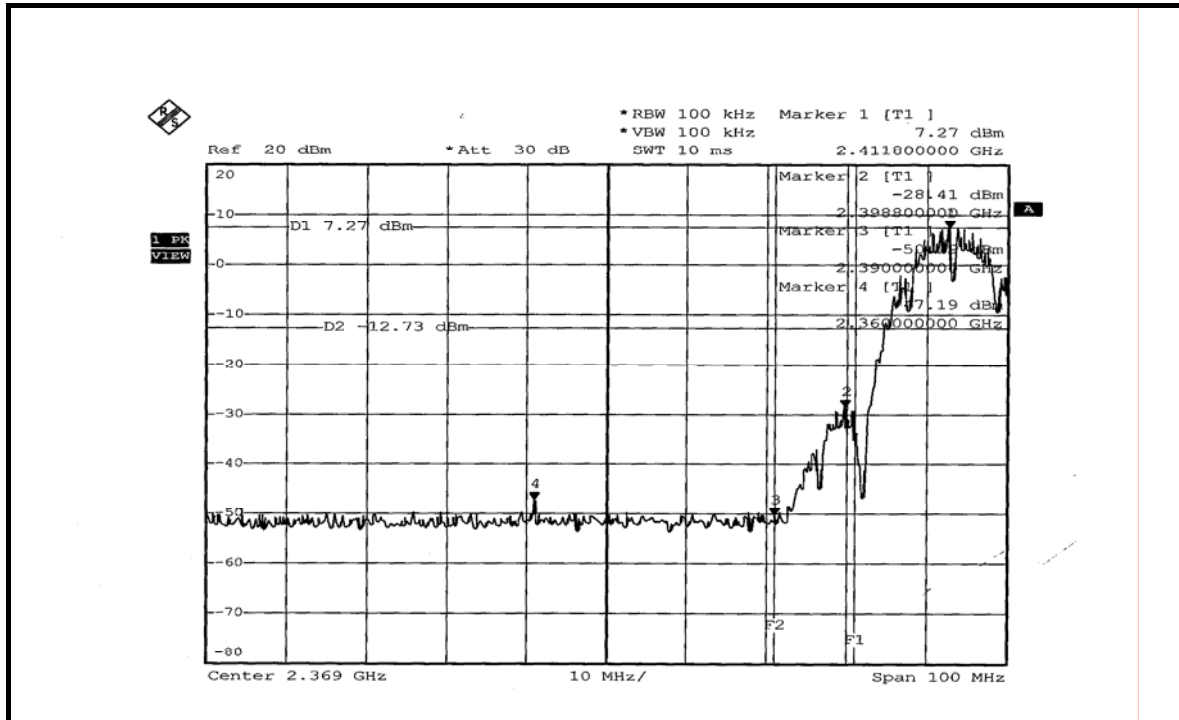

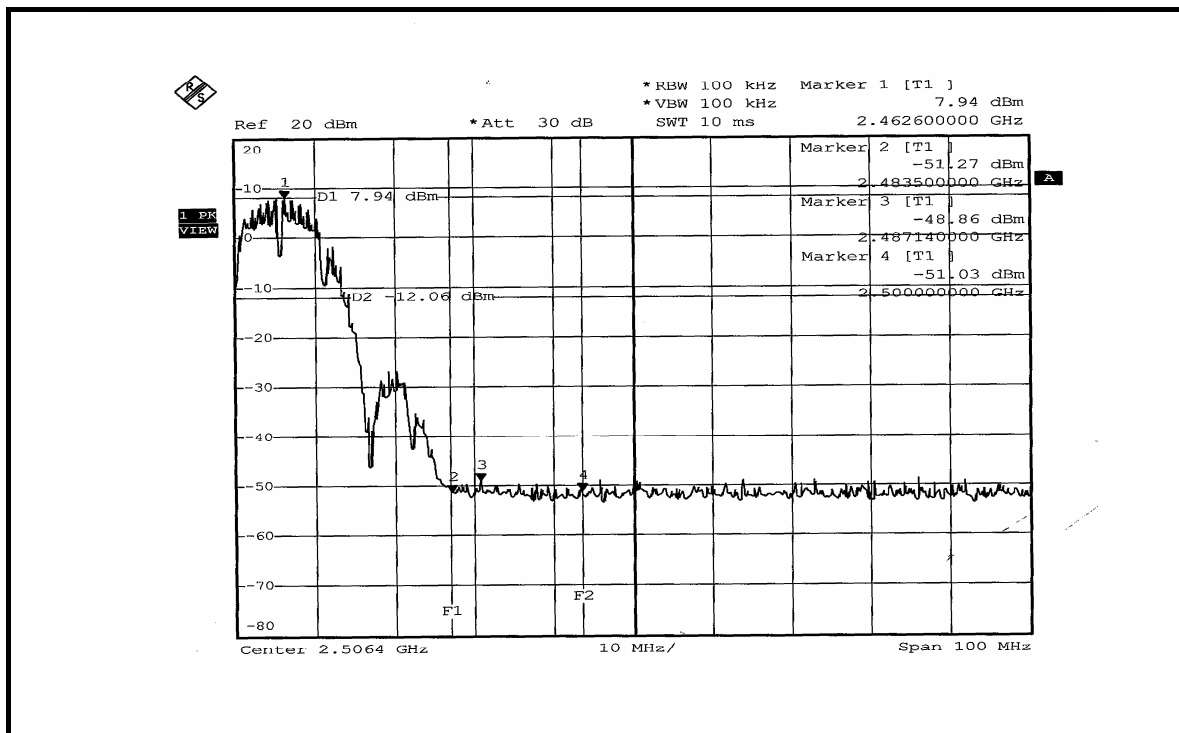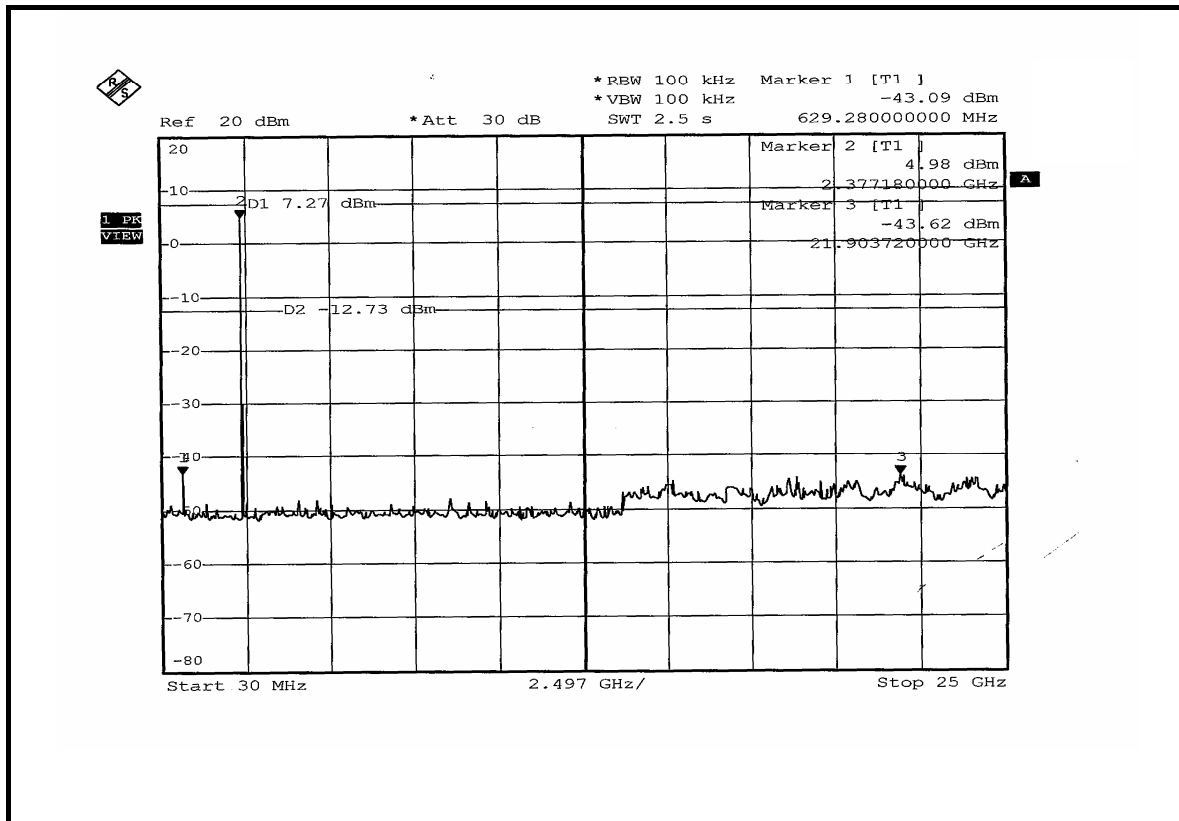

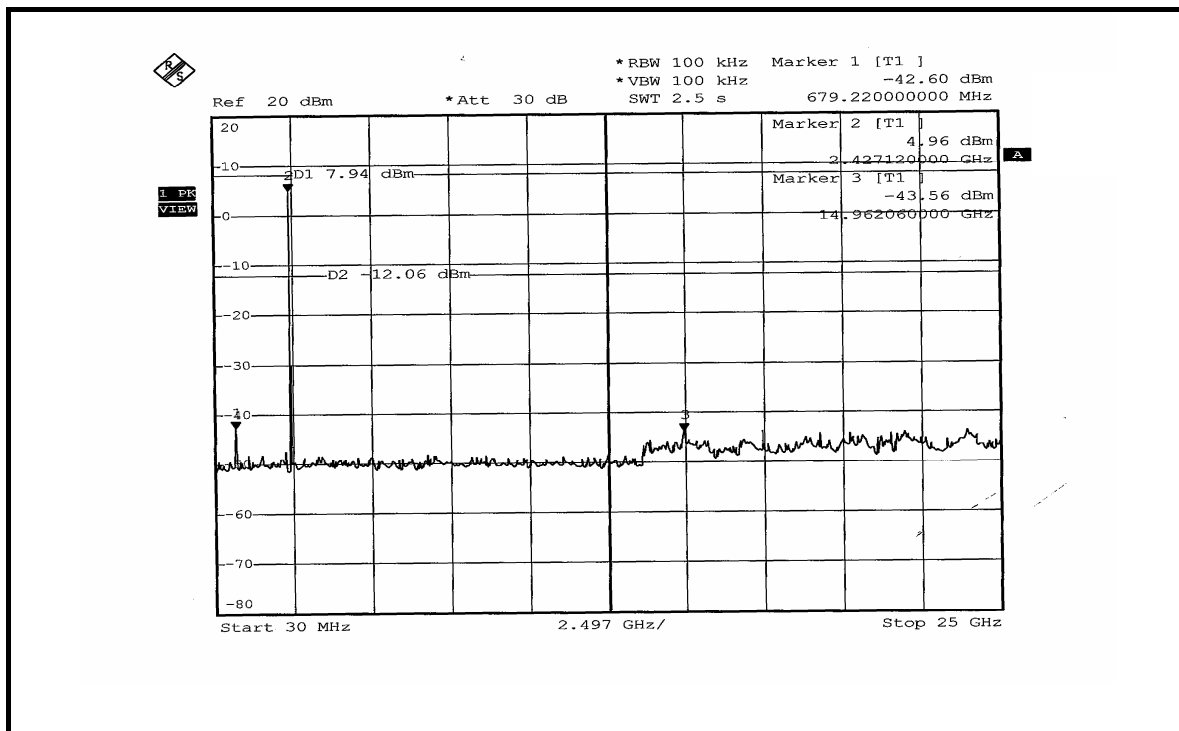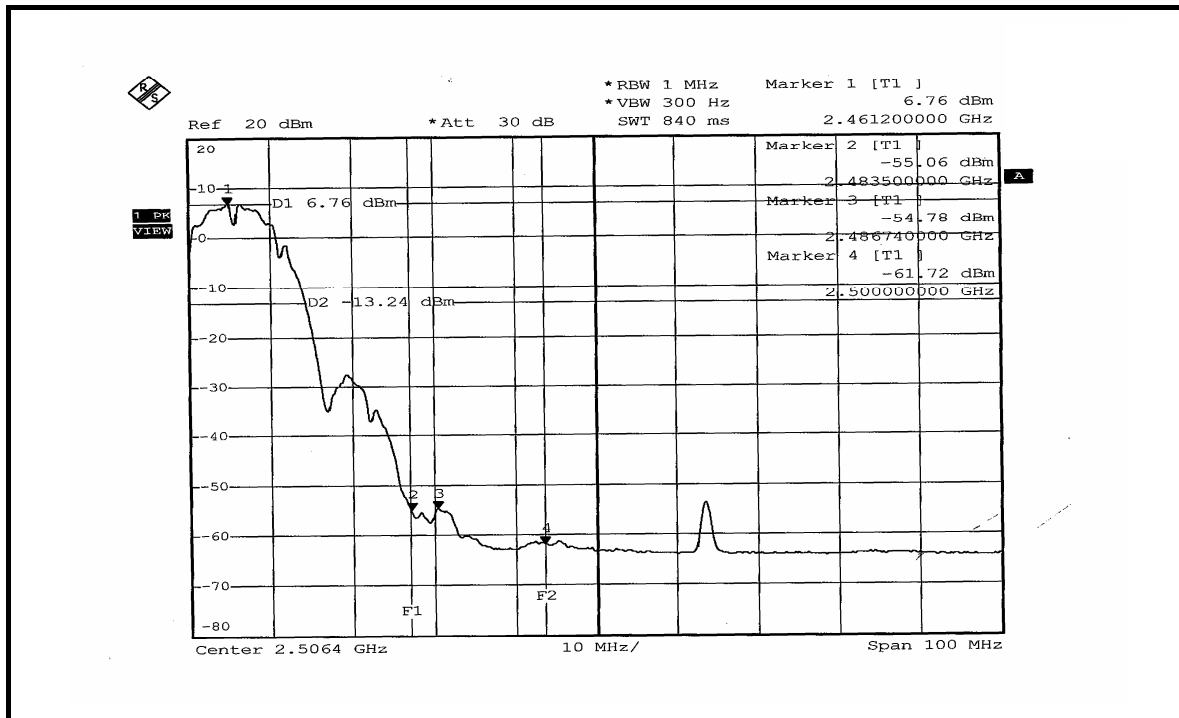

802.11g OFDM MODULATION



NOTE 1: The band edge emission plot of OFDM technique on the next page shows 44.57dBc between carrier maximum power and local maximum emission in restrict band (2.38960GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 111.78dBuV/m (Peak), so the maximum field strength in restrict band is $111.78 - 44.57 = 67.21$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of OFDM technique on the next page shows 49.14dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 101.49dBuV/m (Average), so the maximum field strength in restrict band is $101.49 - 49.14 = 52.35$ dBuV/m which is under 54dBuV/m limit.



NOTE 2: The band edge emission plot of OFDM technique on the next second page shows 43.49dBc between carrier maximum power and local maximum emission in restrict band (2.48370GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 111.65dBuV/m (Peak), so the maximum field strength in restrict band is $111.65 - 43.49 = 68.16$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot of OFDM technique on the next third page shows 48.71dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 101.29dBuV/m (Average), so the maximum field strength in restrict band is $101.29 - 48.71 = 52.58$ dBuV/m which is under 54dBuV/m limit.

802.11g OFDM MODULATION

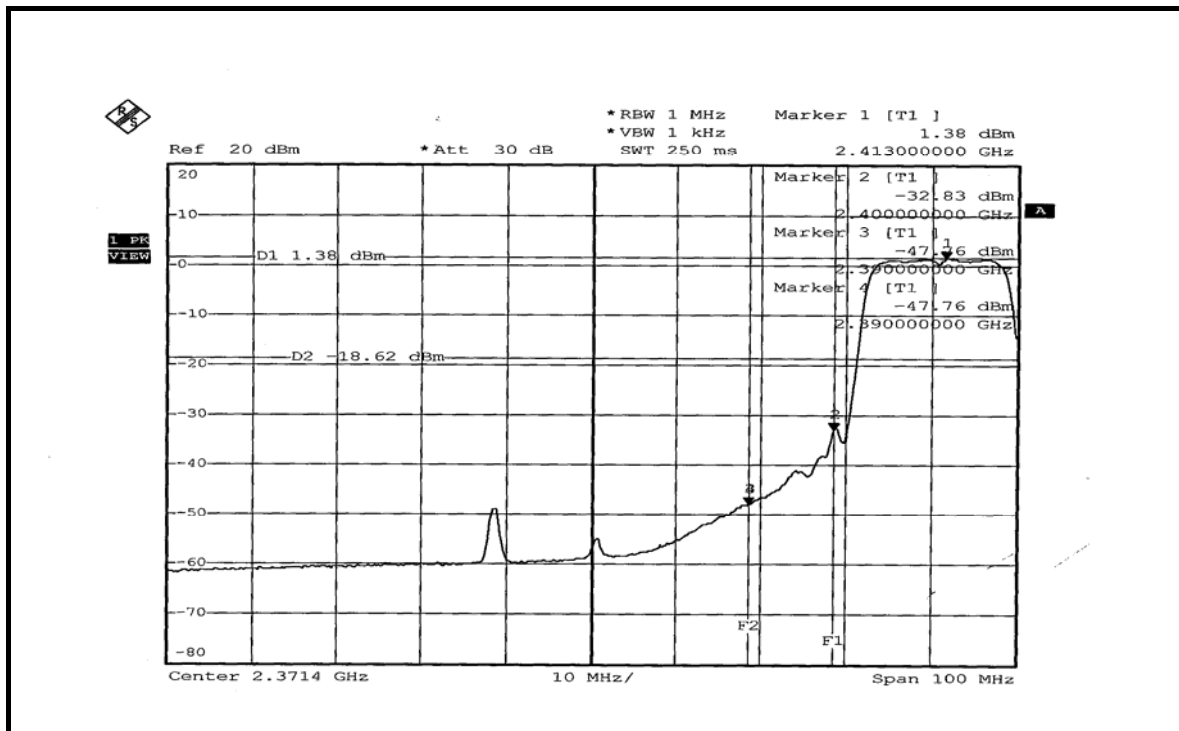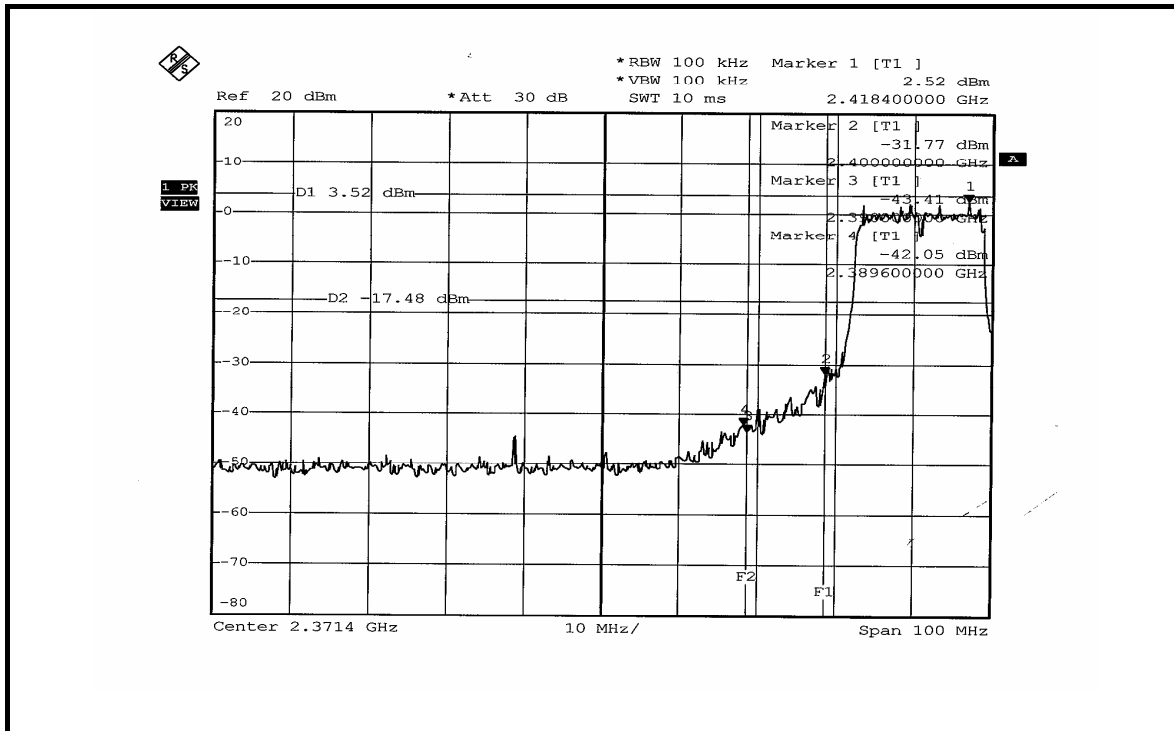

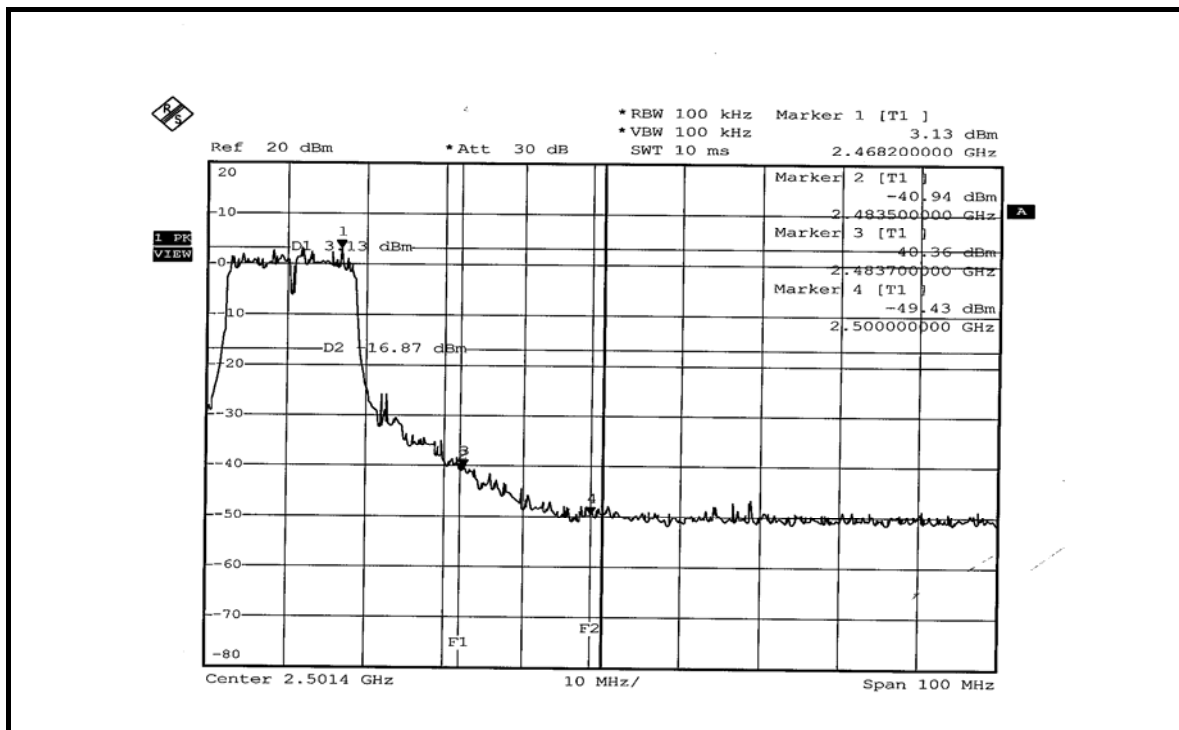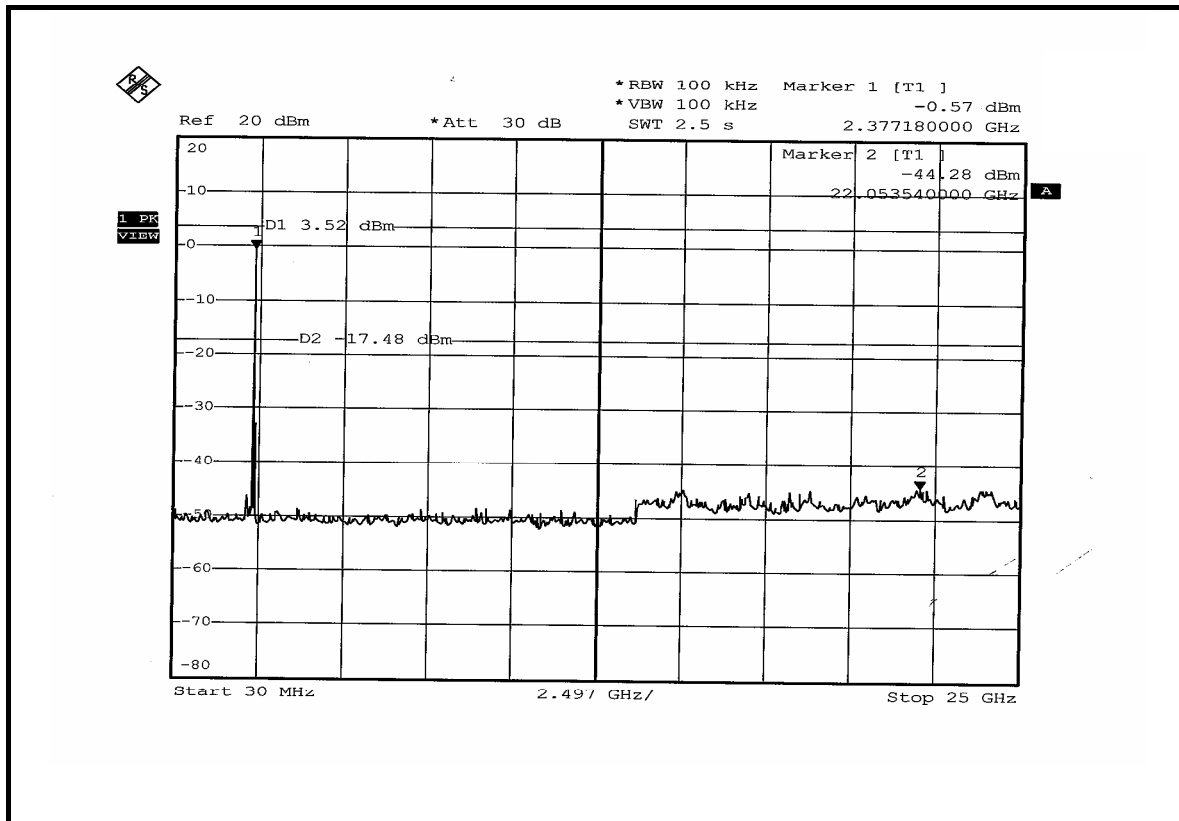

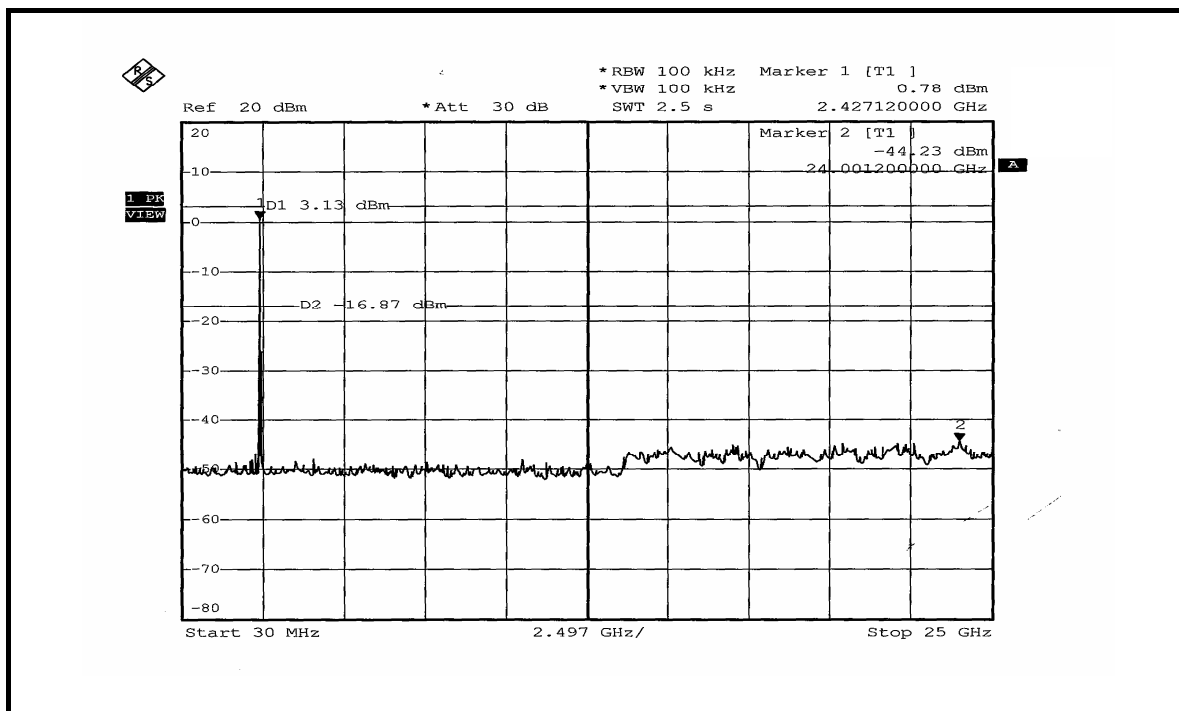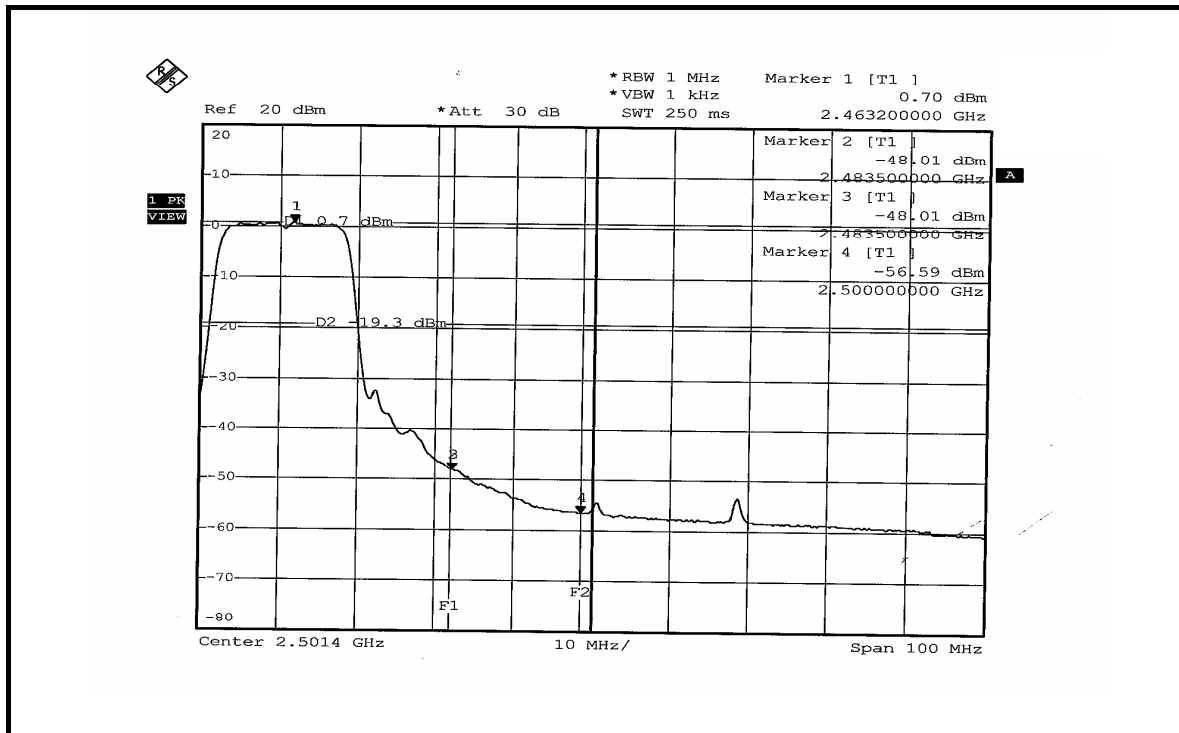



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dipole antenna with RSMA antenna connector. The maximum Gain of the antenna is 2dBi.



5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025

USA	FCC, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, NCC
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.