

Test Laboratory: Compliance Certification Services

Host # 1 (PCG-5312)_B mode

DUT: Airgo; Type: AGN1023PC; Serial: 6862

Phantom section: Flat Section

Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Measurement Standard: DASY4 (High Precision Assessment)

- **Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.5 deg. C**
- Area Scan setting - Find Secondary Maximum Within: 3.0 dB and with a peak SAR value greater than 0.3 W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.32, 8.32, 8.32);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 123

11b-1Mbps_L-ch/Area Scan (10x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.775 mW/g

11b-1Mbps_L-ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.8 V/m; Power Drift = -0.2 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.593 mW/g; SAR(10 g) = 0.306 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.761 mW/g

11b-1Mbps_L-ch/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 13.8 V/m; Power Drift = -0.2 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.559 mW/g; SAR(10 g) = 0.295 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.762 mW/g

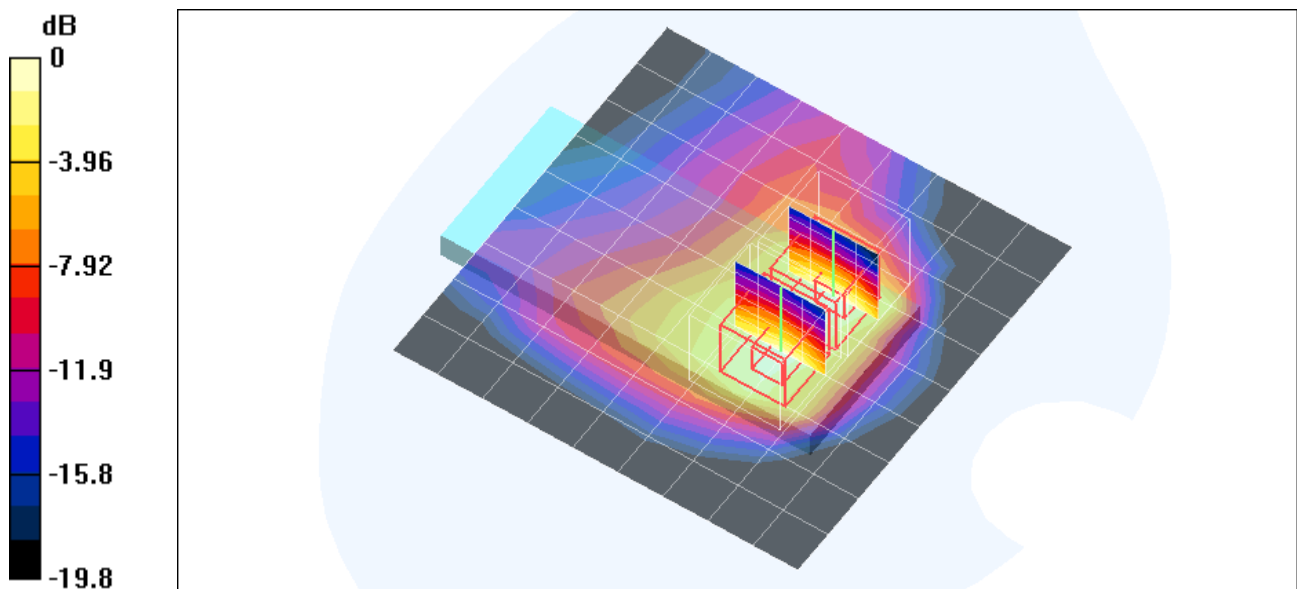

0 dB = 0.762mW/g

Test Laboratory: Compliance Certification Services

Host # 1 (PCG-5312)_B mode

DUT: Airgo; Type: AGN1023PC; Serial: 6862


Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

11b-1Mbps_L-ch/Z Scan (1x1x34): Measurement grid: dx=20mm, dy=20mm, dz=3mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.556 mW/g

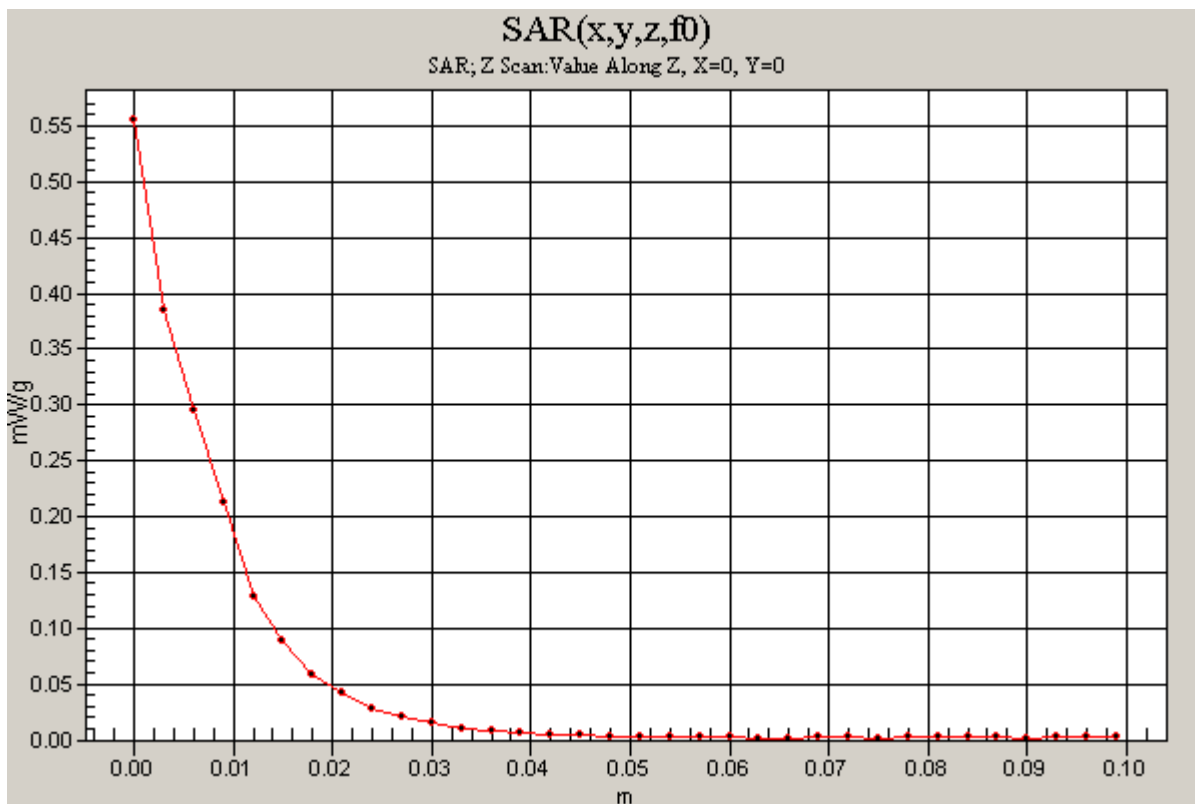

Test Laboratory: Compliance Certification Services

Host # 1 (PCG-5312)_B mode

DUT: Airgo; Type: AGN1023PC; Serial: 6862

Phantom section: Flat Section

Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.94$ mho/m; $\epsilon_r = 52$; $\rho = 1000$ kg/m³

Measurement Standard: DAS4 (High Precision Assessment)

- **Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.5 deg. C**
- Area Scan setting - Find Secondary Maximum Within: 3.0 dB and with a peak SAR value greater than 0.3 W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.32, 8.32, 8.32);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DAS4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 123

11b-1Mbps_M-ch/Area Scan (10x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.630 mW/g

11b-1Mbps_M-ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.8 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.500 mW/g; SAR(10 g) = 0.259 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.684 mW/g

11b-1Mbps_M-ch/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 11.8 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.970 W/kg

SAR(1 g) = 0.522 mW/g; SAR(10 g) = 0.276 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.661 mW/g

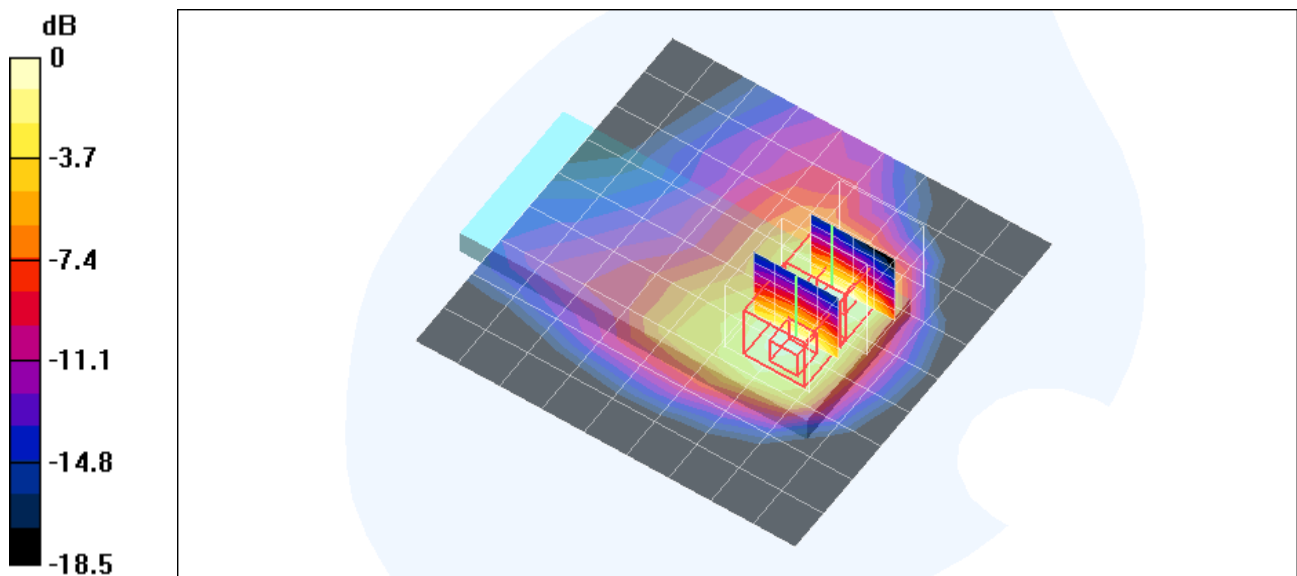

0 dB = 0.661mW/g

Test Laboratory: Compliance Certification Services

Host # 1 (PCG-5312)_B mode

DUT: Airgo; Type: AGN1023PC; Serial: 6862

Phantom section: Flat Section

Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 52$; $\rho = 1000$ kg/m³

Measurement Standard: DAS4 (High Precision Assessment)

- **Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.5 deg. C**
- Area Scan setting - Find Secondary Maximum Within: 3.0 dB and with a peak SAR value greater than 0.3 W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.32, 8.32, 8.32);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DAS4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 123

11b-1Mbps_H-ch/Area Scan (10x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.525 mW/g

11b-1Mbps_H-ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.3 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.792 W/kg

SAR(1 g) = 0.394 mW/g; SAR(10 g) = 0.208 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.574 mW/g

11b-1Mbps_H-ch/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 10.3 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.475 mW/g; SAR(10 g) = 0.233 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.699 mW/g

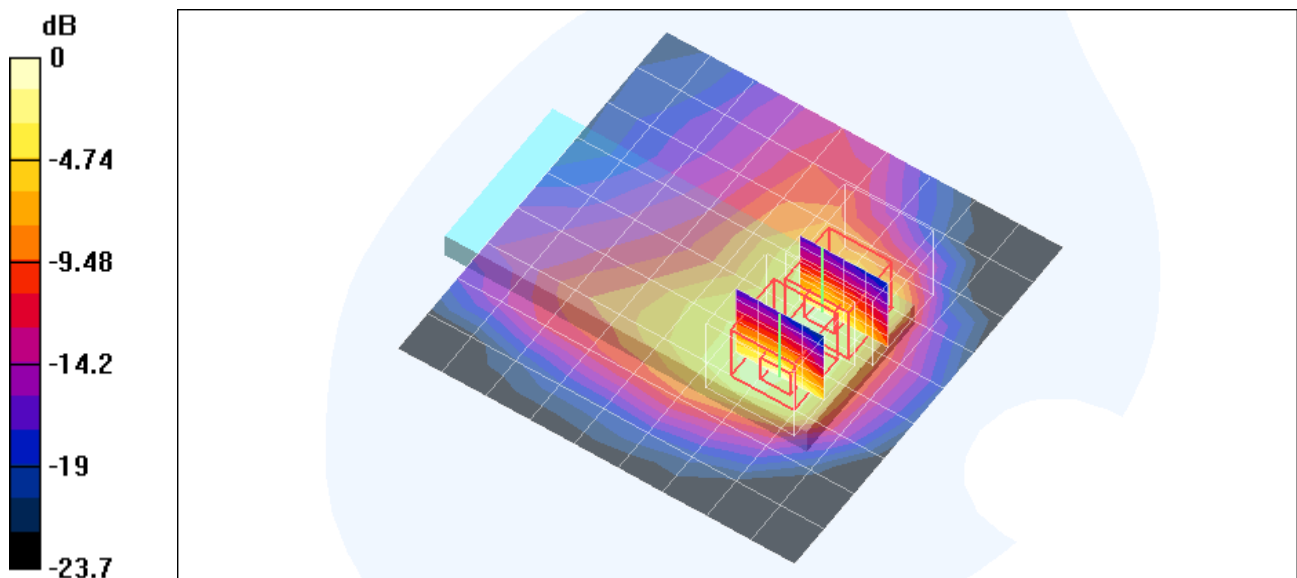

0 dB = 0.699mW/g

Test Laboratory: Compliance Certification Services

Host # 1 (PCG-5312)_G mode

DUT: Airgo; Type: AGN1023PC; Serial: 6862

Phantom section: Flat Section

Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Measurement Standard: DAS4 (High Precision Assessment)

- **Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.5 deg. C**
- Area Scan setting - Find Secondary Maximum Within: 3.0 dB and with a peak SAR value greater than 0.3 W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.32, 8.32, 8.32);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DAS4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 123

11g-6Mbps_L-ch/Area Scan (10x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.07 mW/g

11g-6Mbps_L-ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.9 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 0.823 mW/g; SAR(10 g) = 0.420 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

11g-6Mbps_L-ch/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm



Reference Value = 15.9 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.790 mW/g; SAR(10 g) = 0.420 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 1.02 mW/g

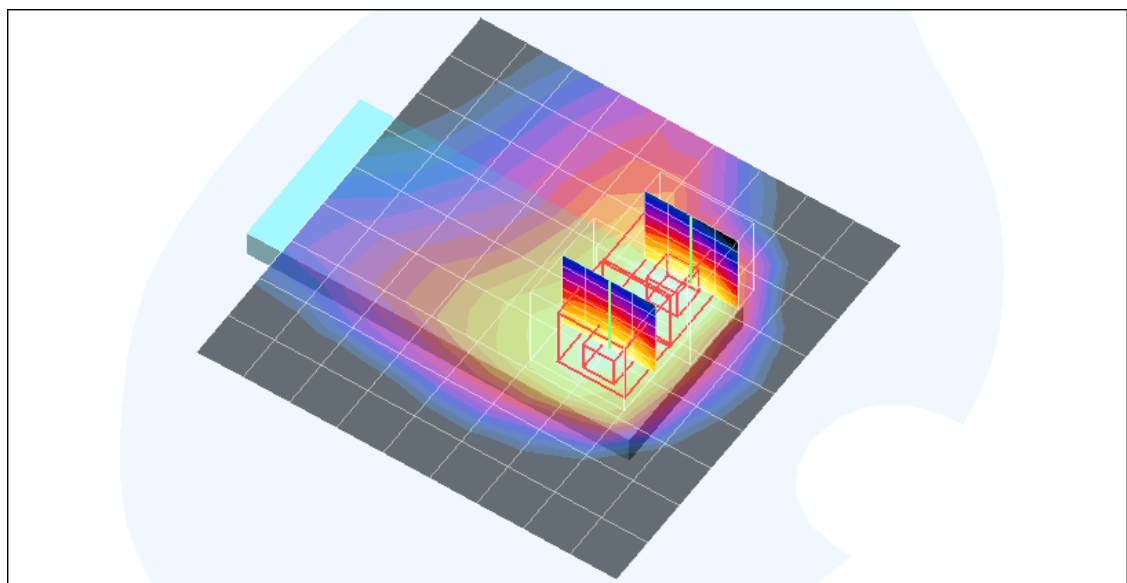

0 dB = 1.02mW/g

Test Laboratory: Compliance Certification Services

Host # 1 (PCG-5312)_G mode

DUT: Airgo; Type: AGN1023PC; Serial: 6862


Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

11g-6Mbps_L-ch/Z Scan (1x1x34): Measurement grid: dx=20mm, dy=20mm, dz=3mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.785 mW/g

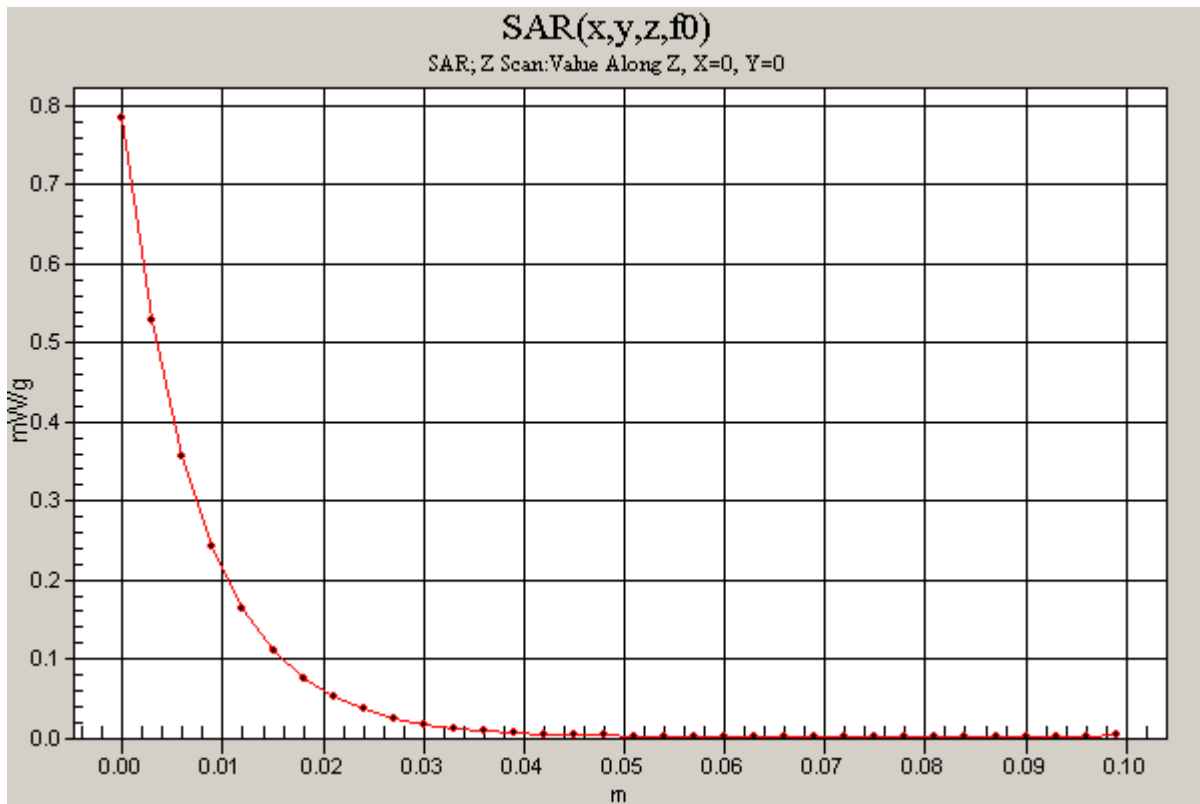

Test Laboratory: Compliance Certification Services

Host # 1 (PCG-5312)_G mode

DUT: Airgo; Type: AGN1023PC; Serial: 6862

Phantom section: Flat Section

Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.94$ mho/m; $\epsilon_r = 52$; $\rho = 1000$ kg/m³

Measurement Standard: DASY4 (High Precision Assessment)

- **Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.5 deg. C**
- Area Scan setting - Find Secondary Maximum Within: 3.0 dB and with a peak SAR value greater than 0.3 W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.32, 8.32, 8.32);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 123

11g-6Mbps_M-ch/Area Scan (10x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.985 mW/g

11g-6Mbps_M-ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.8 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.676 mW/g; SAR(10 g) = 0.350 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.915 mW/g

11g-6Mbps_M-ch/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 14.8 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.738 mW/g; SAR(10 g) = 0.383 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.974 mW/g

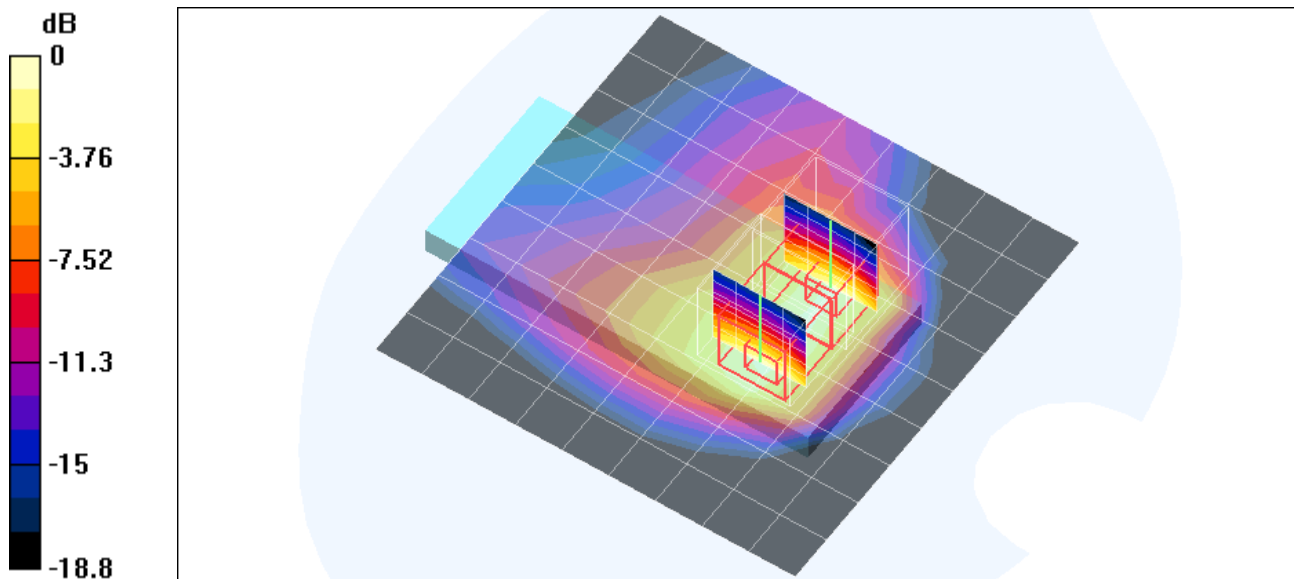

0 dB = 0.974mW/g

Test Laboratory: Compliance Certification Services

Host # 1 (PCG-5312)_G mode

DUT: Airgo; Type: AGN1023PC; Serial: 6862

Phantom section: Flat Section

Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 52$; $\rho = 1000$ kg/m³

Measurement Standard: DASY4 (High Precision Assessment)

- **Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.5 deg. C**
- Area Scan setting - Find Secondary Maximum Within: 3.0 dB and with a peak SAR value greater than 0.3 W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.32, 8.32, 8.32);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 123

11g-6Mbps_H-ch/Area Scan (10x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.844 mW/g

11g-6Mbps_H-ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.631 mW/g; SAR(10 g) = 0.325 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.839 mW/g

11g-6Mbps_H-ch/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 13 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.1 W/kg

SAR(1 g) = 0.551 mW/g; SAR(10 g) = 0.288 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.755 mW/g

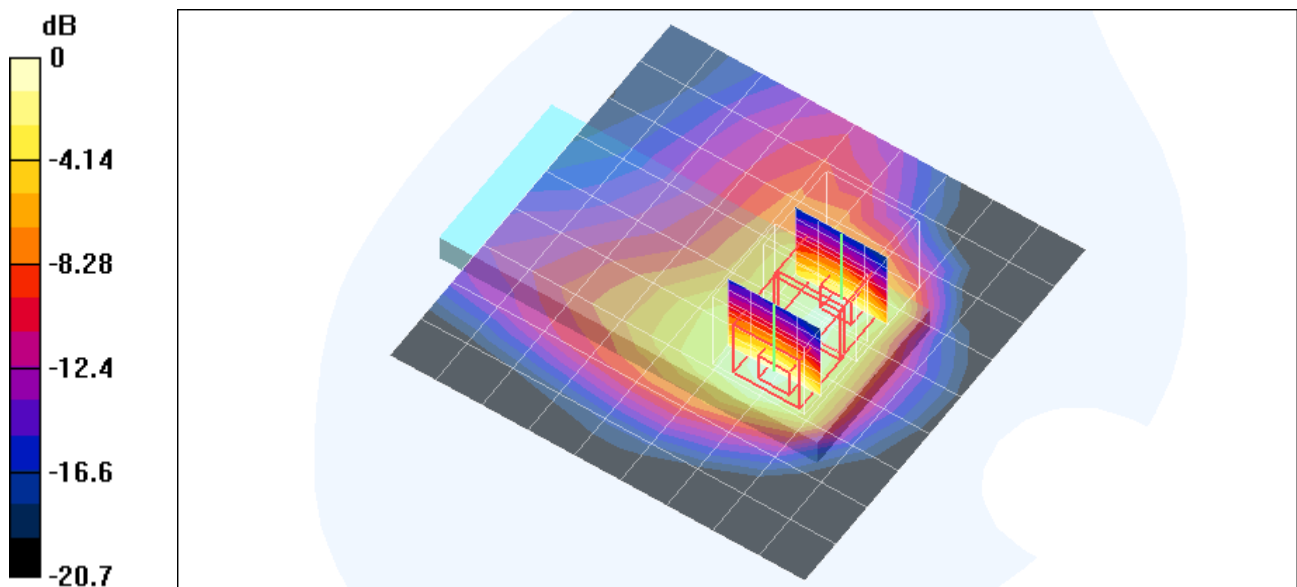

0 dB = 0.755mW/g