

Airgo 1200 AP True MIMO Access Point  
 FCC ID: SA3-AGN1202AP0000

MPE Calculations

The EUT has two radio boards , one operating at 2.4 GHz, the other operating at 5 GHz. Each radio uses 3 antennas in MIMO (multiple in, multiple out) configuration. Two of the antennas are transmit/receive, the third antenna is receive only. The receive only antenna is the center antenna of each triplet.

Each transmit antenna is fed half the total radio output power at that frequency.

The maximum RF exposure will be when both transmitter cards are transmitting data at their highest power settings.

Maximum Power output:

2.4 GHz: 25.13 dBm ( 2412 MHz in 802.11g mode)  
 5 GHz: 25.28 dBm (5745 MHz DTS)


Antenna gain, 2.4GHz: 2 dBi  
 Antenna gain, 5 GHz: 3 dBi

One-half power 2.4 GHz: 22.13 dBm  
 One-half power 5 GHz: 22.28 dBm

Maximum EIRP from each 2.4 GHz transmit antenna is  $22.13 + 2 = 24.13$  dBm EIRP  
 Maximum EIRP from each 5 GHz transmit antenna is  $22.28 + 3 = 25.28$  dBm EIRP

To determine the overall exposure at 20 cm from the EUT, the contribution from each antenna will be added and then compared to the limit of  $1 \text{ mW/cm}^2$

TOP VIEW EUT

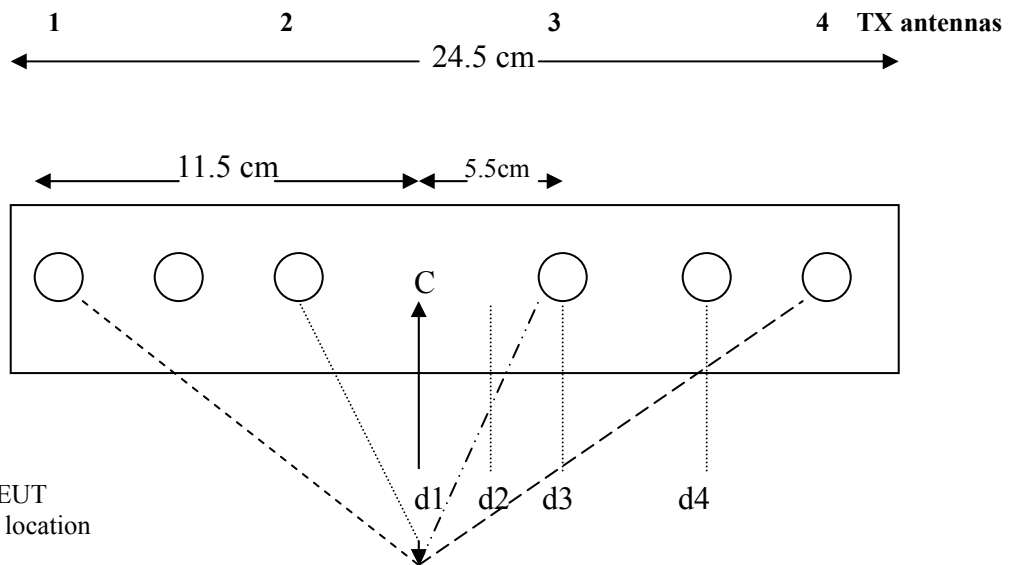

C: center of EUT  
 d1-d4: 20cm location

d1 to d2: 0.75 cm    d2 to d3: 4.75cm    d3 to d4: 3cm

A point 20 cm from the center of the EUT is intuitively the point at which all antennas are at their minimum separation distance, meaning the greatest field strength contribution will be located here. This is the result of a number of iterations of the calculation spread sheet, choosing different locations along the length of the EUT for exposure points. Power density decreases as the square of the separation distance, so that even if the 20 cm point is directly in front of one of the antennas, the contributions from the other antennas are less.

Antenna 1 distance to d1:  $(11.5^2 + 20^2)^{0.5} = 23.1 \text{ cm} = 0.231 \text{ m}$   
Antenna 2 distance to d1:  $(5.5^2 + 20^2)^{0.5} = 20.7 \text{ cm} = 0.207 \text{ m}$   
Antenna 3 distance to d1:  $(5.5^2 + 20^2)^{0.5} = 20.7 \text{ cm} = 0.207 \text{ m}$   
Antenna 4 distance to d1:  $(11.5^2 + 20^2)^{0.5} = 23.1 \text{ cm} = 0.231 \text{ m}$

The field strength contribution from each antenna is calculated using the equation

$$E, \text{ V/m} = (30 * \text{EIRP, watts})^{0.5} / \text{separation distance}$$

Maximum EIRP from each 2.4 GHz transmit antenna is 24.13 dBm EIRP = 0.258 watt EIRP  
Maximum EIRP from each 5 GHz transmit antenna is 25.28 dBm EIRP = 0.336 watt EIRP

$$S, \text{ mW/cm}^2 = E^2 / 3770, E \text{ in V/m}$$

20 cm exposure distances were calculated for four locations;

- d1: 20 cm projected from the center point of the EUT
- d2: 20 cm projected from horizontal point at which fields are equal from the two outer antennas
- d3: 20 cm projected from the inner 5 GHz antenna
- d4: 20 cm projected from the center point between the two 5 GHz antennas.

Worst case data was at d1.

Total exposure at d1: **0.19889 mW/cm<sup>2</sup>**  
Limit: 1.00000 mW/cm<sup>2</sup>