

Airgo 1200 AP True MIMO Access Point
FCC ID: SA3-AGN1202AP0000

MPE Calculations

The EUT has two radio boards , one operating at 2.4 GHz, the other operating at 5 GHz. Each radio uses 3 antennas in MIMO (multiple in, multiple out) configuration. Two of the antennas are transmit/receive, the third antenna is receive only. The receive only antenna is the center antenna of each triplet.

Each transmit antenna is fed half the total radio output power at that frequency.

The maximum RF exposure will be when both transmitter cards are transmitting data at their highest power settings.

Maximum Power output:

2.4 GHz: 25.13 dBm (2412 MHz in 802.11g mode)
5 GHz: 28.02 dBm (5745 MHz DTS)


Antenna gain, 2.4GHz: 2 dBi (antennas 1 and 2)
Antenna gain, 5 GHz: 3 dBi (antennas 3 and 4)

One-half power 2.4 GHz: 22.13 dBm
One-half power 5 GHz: 25.02 dBm

Maximum EIRP from each 2.4 GHz transmit antenna is $22.13 + 2 = 24.13$ dBm EIRP
Maximum EIRP from each 5 GHz transmit antenna is $25.02 + 3 = 28.02$ dBm EIRP

To determine the overall exposure at 20 cm from the EUT, the contribution from each antenna will be added and then compared to the limit of 1 mW/cm^2

TOP VIEW EUT

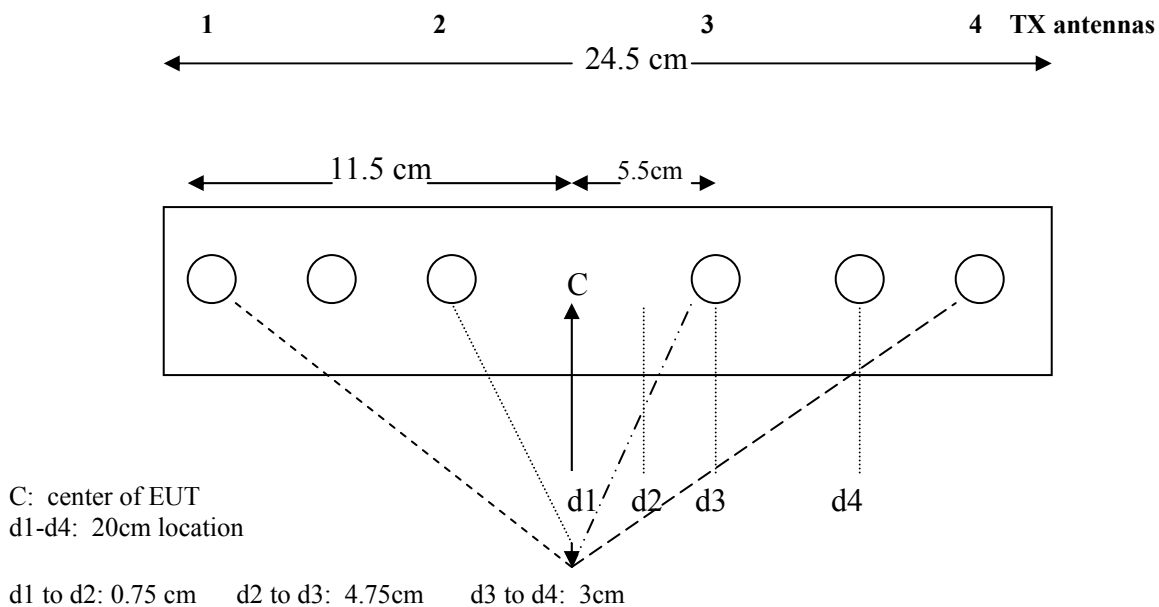

A 20 cm away and closest to the higher eirp 5 GHz antennas is intuitively the point at which the greatest field strength contribution will be located. This is the result of a number of iterations of the calculation spread sheet, choosing different locations along the length of the EUT for exposure points. Power density decreases as the square of the separation distance, so that even if the 20 cm point is directly in front of one of the antennas, the contributions from the other antennas are less.

Antenna 1 distance to d1: $(11.5^2 + 20^2)^{0.5} = 23.1 \text{ cm} = 0.231 \text{ m}$
 Antenna 2 distance to d1: $(5.5^2 + 20^2)^{0.5} = 20.7 \text{ cm} = 0.207 \text{ m}$
 Antenna 3 distance to d1: $(5.5^2 + 20^2)^{0.5} = 20.7 \text{ cm} = 0.207 \text{ m}$
 Antenna 4 distance to d1: $(11.5^2 + 20^2)^{0.5} = 23.1 \text{ cm} = 0.231 \text{ m}$

The field strength contribution from each antenna is calculated using the equation

$$E, \text{ V/m} = (30 * \text{EIRP, watts})^{0.5} / \text{separation distance}$$

Maximum EIRP from each 2.4 GHz transmit antenna is 24.13 dBm EIRP = 0.258 watt EIRP
 Maximum EIRP from each 5 GHz transmit antenna is 28.02 dBm EIRP = 0.634 watt EIRP

$$S, \text{ mW/cm}^2 = E^2 / 3770, E \text{ in V/m}$$

20 cm exposure distances were calculated for four locations;

- d1: 20 cm projected from the center point of the EUT
- d2: 20 cm projected from horizontal point at which fields are equal from the two outer antennas
- d3: 20 cm projected from the inner 5 GHz antenna
- d4: 20 cm projected from the center point between the two 5 GHz antennas.

Worst case data was at d3.

Total exposure at d3: **0.31104 mW/cm²**
 Limit: 1.00000 mW/cm²