



FCC TEST REPORT

(PART 15, SUBPART C, 15.247)

REPORT NO.: RF941123L17
MODEL NO.: P60
RECEIVED: Nov. 24, 2005
TESTED: Dec. 21, 2005 ~ Jan. 03, 2006
ISSUED: Jan. 05, 2006

APPLICANT: ELITEGROUP COMPUTER SYSTEMS
CO., LTD.

ADDRESS: 2F. No. 240, Sec. 1, Nei Hu Road, Taipei,
Taiwan 114, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan,
R.O.C.

This test report consists of 167 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



No. 2177-01



0528



Table of Contents

1.	CERTIFICATION	6
2.	SUMMARY OF TEST RESULTS	7
2.1	MEASUREMENT UNCERTAINTY	8
3.	GENERAL INFORMATION.....	9
3.1	GENERAL DESCRIPTION OF EUT.....	9
3.2	DESCRIPTION OF TEST MODES.....	11
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST.....	13
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	14
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	19
3.4	DESCRIPTION OF SUPPORT UNITS	19
4.	TEST TYPES AND RESULTS (FOR 802.11b & g 2412~2462MHz BAND).....	20
4.1	CONDUCTED EMISSION MEASUREMENT	20
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	20
4.1.2	TEST INSTRUMENTS.....	20
4.1.3	TEST PROCEDURES	21
4.1.4	DEVIATION FROM TEST STANDARD	21
4.1.5	TEST SETUP	22
4.1.6	EUT OPERATING CONDITIONS	22
4.1.7	TEST RESULTS	23
4.2	RADIATED EMISSION MEASUREMENT	35
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	35
4.2.2	TEST INSTRUMENTS.....	36
4.2.3	TEST PROCEDURES	37
4.2.4	DEVIATION FROM TEST STANDARD	37
4.2.5	TEST SETUP	38
4.2.6	EUT OPERATING CONDITIONS	38
4.2.7	TEST RESULTS	39
4.3	6dB BANDWIDTH MEASUREMENT	47
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	47
4.3.2	TEST INSTRUMENTS.....	47
4.3.3	TEST PROCEDURE.....	48
4.3.4	DEVIATION FROM TEST STANDARD	48
4.3.5	TEST SETUP	48
4.3.6	EUT OPERATING CONDITIONS	48
4.3.7	TEST RESULTS	49
4.4	MAXIMUM PEAK OUTPUT POWER	55
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT.....	55
4.4.2	INSTRUMENTS.....	55
4.4.1	TEST PROCEDURES	56
4.4.2	DEVIATION FROM TEST STANDARD	56
4.4.3	TEST SETUP	56
4.4.4	EUT OPERATING CONDITIONS	56
4.4.3	TEST RESULTS	57
4.5	POWER SPECTRAL DENSITY MEASUREMENT.....	58
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	58
4.5.2	TEST INSTRUMENTS.....	58



4.5.3	TEST PROCEDURE.....	59
4.5.4	DEVIATION FROM TEST STANDARD	59
4.5.5	TEST SETUP	59
4.5.6	EUT OPERATING CONDITION	59
4.5.7	TEST RESULTS	60
4.6	BAND EDGES MEASUREMENT	66
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	66
4.6.2	TEST INSTRUMENTS.....	66
4.6.3	TEST PROCEDURE.....	66
4.6.4	DEVIATION FROM TEST STANDARD	66
4.6.5	EUT OPERATING CONDITION	66
4.6.6	TEST RESULTS	67
4.7	ANTENNA REQUIREMENT	75
4.7.1	STANDARD APPLICABLE	75
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	75
5.	TEST TYPES AND RESULTS (FOR 802.11a 5745~5825MHz Band)	76
5.1	CONDUCTED EMISSION MEASUREMENT	76
5.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	76
5.1.2	TEST INSTRUMENTS.....	76
5.1.3	TEST PROCEDURES	77
5.1.4	DEVIATION FROM TEST STANDARD	77
5.1.5	TEST SETUP	78
5.1.6	EUT OPERATING CONDITIONS	78
5.1.7	TEST RESULTS	79
5.2	RADIATED EMISSION MEASUREMENT	83
5.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	83
5.2.2	TEST INSTRUMENTS.....	84
5.2.3	TEST PROCEDURES	85
5.2.4	DEVIATION FROM TEST STANDARD	85
5.2.5	TEST SETUP	86
5.2.6	EUT OPERATING CONDITIONS	86
5.2.7	TEST RESULTS	87
5.3	6dB BANDWIDTH MEASUREMENT	92
5.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	92
5.3.2	TEST INSTRUMENTS.....	92
5.3.3	TEST PROCEDURE.....	93
5.3.4	DEVIATION FROM TEST STANDARD	93
5.3.5	TEST SETUP	93
5.3.6	EUT OPERATING CONDITIONS	93
5.3.7	TEST RESULTS	94
5.4	MAXIMUM PEAK OUTPUT POWER	97
5.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT.....	97
5.4.2	INSTRUMENTS.....	97
5.4.3	TEST PROCEDURES	98
5.4.4	DEVIATION FROM TEST STANDARD	98
5.4.5	TEST SETUP	98
5.4.6	EUT OPERATING CONDITIONS	98
5.4.7	TEST RESULTS	99
5.5	POWER SPECTRAL DENSITY MEASUREMENT.....	100
5.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	100



5.5.2 TEST INSTRUMENTS..... 100

5.5.3 TEST PROCEDURE..... 101

5.5.4 DEVIATION FROM TEST STANDARD 101

5.5.5 TEST SETUP 101

5.5.6 EUT OPERATING CONDITION 101

5.5.7 TEST RESULTS 102

5.6 BAND EDGES MEASUREMENT 105

5.6.1 LIMITS OF BAND EDGES MEASUREMENT 105

5.6.2 TEST INSTRUMENTS..... 105

5.6.3 TEST PROCEDURE..... 105

5.6.4 DEVIATION FROM TEST STANDARD 105

5.6.5 EUT OPERATING CONDITION 106

5.6.6 TEST RESULTS 106

5.7 ANTENNA REQUIREMENT 110

5.7.1 STANDARD APPLICABLE 110

5.7.2 ANTENNA CONNECTED CONSTRUCTION..... 110

6. TEST TYPES AND RESULTS (FOR BLUETOOTH)..... 111

6.1.1 CONDUCTED EMISSION MEASUREMENT 111

6.1.2 LIMITS OF CONDUCTED EMISSION MEASUREMENT..... 111

6.1.3 TEST INSTRUMENTS..... 111

6.1.4 TEST PROCEDURES 112

6.1.5 DEVIATION FROM TEST STANDARD 112

6.1.6 TEST SETUP 113

6.1.7 EUT OPERATING CONDITIONS 113

6.1.8 TEST RESULTS 114

6.2 RADIATED EMISSION MEASUREMENT 126

6.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT..... 126

6.2.2 TEST INSTRUMENTS..... 127

6.2.3 TEST PROCEDURES 128

6.2.4 DEVIATION FROM TEST STANDARD 128

6.2.5 TEST SETUP 129

6.2.6 EUT OPERATING CONDITIONS 129

6.2.7 TEST RESULTS 130

6.3 NUMBER OF HOPPING FREQUENCY USED 135

6.3.1 LIMIT OF HOPPING FREQUENCY USED 135

6.3.2 TEST INSTRUMENTS..... 135

6.3.3 TEST PROCEDURES 135

6.3.4 DEVIATION FROM TEST STANDARD 136

6.3.5 TEST SETUP 136

6.3.6 TEST RESULTS 136

6.4 DWELL TIME ON EACH CHANNEL 138

6.4.1 LIMIT OF DWELL TIME USED..... 138

6.4.2 TEST INSTRUMENTS..... 138

6.4.3 TEST PROCEDURES 138

6.4.4 DEVIATION FROM TEST STANDARD 138

6.4.5 TEST SETUP 139

6.4.6 TEST RESULTS 139

6.5 CHANNEL BANDWIDTH..... 143

6.5.1 LIMITS OF CHANNEL BANDWIDTH 143

6.5.2 TEST INSTRUMENTS..... 143



6.5.3 TEST PROCEDURE..... 143

6.5.4 DEVIATION FROM TEST STANDARD 143

6.5.5 TEST SETUP 144

6.5.6 EUT OPERATING CONDITION 144

6.5.7 TEST RESULTS 145

6.6 HOPPING CHANNEL SEPARATION 148

6.6.1 LIMIT OF HOPPING CHANNEL SEPARATION 148

6.6.2 TEST INSTRUMENTS..... 148

6.6.3 TEST PROCEDURES 148

6.6.4 DEVIATION FROM TEST STANDARD 148

6.6.5 TEST SETUP 148

6.6.6 TEST RESULTS 149

6.7 MAXIMUM PEAK OUTPUT POWER 152

6.7.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT 152

6.7.2 TEST INSTRUMENTS..... 152

6.7.3 TEST PROCEDURES 152

6.7.4 DEVIATION FROM TEST STANDARD 152

6.7.5 TEST SETUP 153

6.7.6 EUT OPERATING CONDITION 153

6.7.7 TEST RESULTS 154

6.8 BAND EDGES MEASUREMENT 157

6.8.1 LIMITS OF BAND EDGES MEASUREMENT 157

6.8.2 TEST INSTRUMENTS..... 157

6.8.3 TEST PROCEDURE..... 157

6.8.4 DEVIATION FROM TEST STANDARD 157

6.8.5 EUT OPERATING CONDITION 157

6.8.6 TEST RESULTS 158

6.9 ANTENNA REQUIREMENT 161

6.9.1 STANDARD APPLICABLE 161

6.9.2 ANTENNA CONNECTED CONSTRUCTION..... 161

7. PHOTOGRAPHS OF THE TEST CONFIGURATION..... 162

8. INFORMATION ON THE TESTING LABORATORIES 166

APPENDIX-A A-1



1. CERTIFICATION

PRODUCT: Mini PC

MODEL: P60

BRAND: ECS

APPLICANT: ELITEGROUP COMPUTER SYSTEMS CO., LTD.

TEST SAMPLE: ENGINEERING SAMPLE

TESTED: Dec. 21, 2005 ~ Jan. 03, 2006

STANDARDS: FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Andrea Hsia , **DATE:** Jan. 05, 2006
Andrea Hsia

TECHNICAL ACCEPTANCE : Lohg Chen , **DATE:** Jan. 05, 2006
Responsible for RF Lohg Chen

APPROVED BY : Gary Chang , **DATE:** Jan. 05, 2006
Gary Chang / Supervisor

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

For WLAN Function

APPLIED STANDARD: FCC Part 15, Subpart C (Section 15.247)			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -14.78dB at 0.150MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.28dB at 2390.00MHz
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

For Bluetooth Function

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -15.41dB at 0.150MHz
15.247 (a) (1) (iii)	Number of Hopping Frequency Used Spec.: At least 15 channels	PASS	Meet the requirement of limit
15.247 (a) (1) (iii)	Dwell Time on Each Channel Spec.: Max. 0.4 second within 31.6 second	PASS	Meet the requirement of limit
15.247 (a) (1)	Hopping Channel Separation Spec. : Min. 25 kHz or 20 dB bandwidth, which ever is greater	PASS	Meet the requirement of limit
15.247 (a) (1)	Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	NA	NA
15.247 (b)	Maximum Peak Output Power Spec.: max. 30dBm	PASS	Meet the requirement of limit
15.247 (d)	Transmitter Radiated Emissions Spec.: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -3.34dB at 74.71MHz
15.247 (d)	Band Edge Measurement	PASS	Meet the requirement of limit

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

Measurement	Frequency	Uncertainty
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.55 dB
	200MHz ~ 1000MHz	3.58 dB
	1GHz ~ 18GHz	1.10 dB
	18GHz ~ 40GHz	0.91 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Mini PC
MODEL NO.	P60
POWER SUPPLY	19.0Vdc from AC Adapter
MODULATION TYPE	Wireless LAN: CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM Bluetooth: GFSK for FHSS
MODULATION TECHNOLOGY	DSSS, OFDM, FHSS
TRANSFER RATE	Wireless LAN: 802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps 802.11a: 54/48/36/24/18/12/9/6Mbps Bluetooth: 723Kbps
FREQUENCY RANGE	Wireless LAN: 802.11b & 802.11g: 2.412 ~ 2.462GHz 802.11a: 5.180 ~ 5.320GHz, 5.745 ~ 5.825GHz Bluetooth: 2.402 ~ 2.480GHz
NUMBER OF CHANNEL	Wireless LAN: 802.11b & 802.11g: 11 802.11a: 13 Bluetooth: 79
CHANNEL SPACING	Wireless LAN: 802.11b & 802.11g: 5MHz 802.11a: 20MHz Bluetooth: 1MHz
OUTPUT POWER	Wireless LAN: 72.277mW for 802.11b 80.538mW for 802.11g 47.973mW for 5.180 ~ 5.320GHz 64.417mW for 5.745 ~ 5.825GHz Bluetooth: 1.884mW
ANTENNA TYPE	Wireless LAN: PIFA antenna with 0.67dBi gain (for 2.4GHz) PIFA antenna with 0.56dBi gain (for 5.0GHz) Bluetooth: PIFA antenna with -2.88dBi gain
DATA CABLE	1.70m non-shielded DVI-D cable with two cores
I/O PORTS	Refer to user's manual
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT is a Mini PC with wireless LAN and bluetooth functions.



2. The adapter were operated with following power adapters:

BRAND:	LI SHIN INTERNATIONAL ENTERPRISE CORP.
MODEL:	0335A1965
INPUT:	100-240Vac, 50-60Hz, 1.7A
OUTPUT:	19Vdc, 3.42A
POWER LINE:	AC 1.8m non-shielded cable without core DC 1.6m non-shielded cable with one core

BRAND:	LITE-ON TECHNOLOGY CORPORATION
MODEL:	PA-1650-02
INPUT:	100-240Vac, 50-60Hz, 1.6A
OUTPUT:	19Vdc, 3.42A
POWER LINE:	AC 1.8m non-shielded cable without core DC 1.6m non-shielded cable with one core

3. The EUT operates in both the 5GHz and 2.4GHz Bands and compatibility with 802.11a and 802.11b, 802.11g technology.
4. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Since the EUT is considered a portable unit, it was pre-tested on the positioned of each 3 axis. The worst case was found when positioned on Z-plane. Therefore only the test data of this Z-plane was used for radiated test.

Operated in 2400 ~ 2483.5MHz band:

11 channels are provided to the EUT for wireless LAN function:

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

79 channels are provided to this EUT for bluetooth function:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2431	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		




Operated in 5745 ~ 5825MHz band:

5 channels are provided to this EUT for wireless LAN function:

CHANNEL	FREQUENCY
1	5745 MHz
2	5765 MHz
3	5785 MHz
4	5805 MHz
5	5825 MHz

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

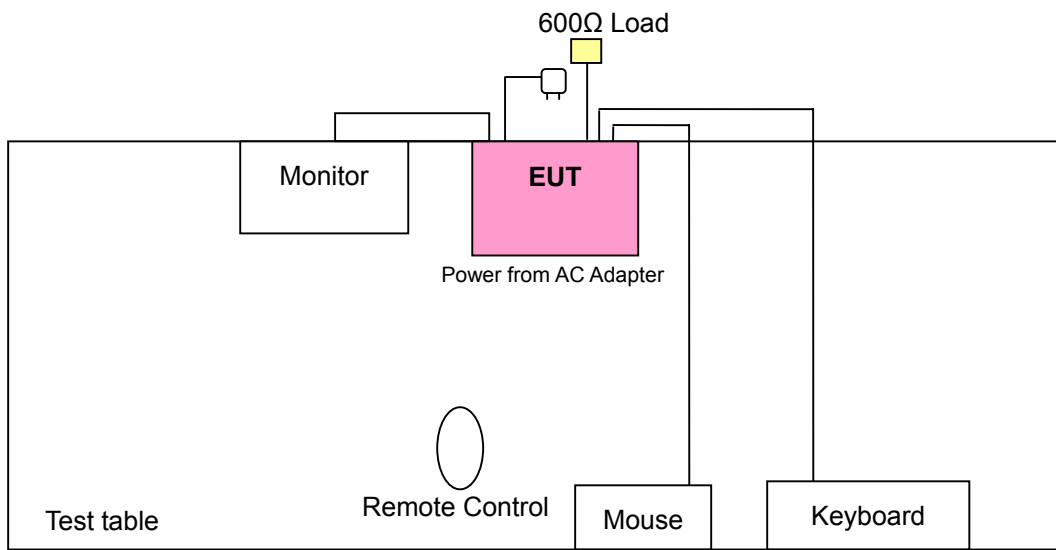



3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

FOR WIRELESS LAN FUNCTION:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
A	√	√	√	√	powered by the adapter model: 0335A1965
B	√	√	-	-	powered by the adapter model: PA-1650-02

Where PLC: Power Line Conducted Emission
RE≥1G: Radiated Emission above 1GHz

RE<1G RE: Radiated Emission below 1GHz
APCM: Antenna Port Conducted Measurement

NOTE: “-“ means no effect.

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	Mode	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
A	802.11a	1 to 5	5	OFDM	BPSK	6
B	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
B	802.11a	1 to 5	5	OFDM	BPSK	6

**Radiated Emission Test (Below 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, antenna ports (if EUT with antenna diversity architecture), and X, Y and Z Axis.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
A	802.11g	1 to 11	11	OFDM	BPSK	6	Z
A	802.11a	1 to 5	5	OFDM	BPSK	6	Z
B	802.11g	1 to 11	11	OFDM	BPSK	6	Z
B	802.11a	1 to 5	5	OFDM	BPSK	6	Z

Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture), and X, Y and Z Axis.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1	Z
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	Z
A	802.11a	1 to 5	1, 3, 5	OFDM	BPSK	6	Z


Bandedge Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 11	OFDM	BPSK	6
802.11a	1 to 5	1, 5	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11a	1 to 5	1, 3, 5	OFDM	BPSK	6



FOR BLUETOOTH FUNCTION:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
A	√	√	√	√	powered by the adapter model: 0335A1965
B	√	√	-	-	powered by the adapter model: PA-1650-02

Where PLC: Power Line Conducted Emission
RE≥1G: Radiated Emission above 1GHz

RE<1G RE: Radiated Emission below 1GHz
APCM: Antenna Port Conducted Measurement

NOTE: “-“ means no effect.

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture), and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
A	0 to 78	0, 39, 78	FHSS	GFSK	DH5
B	0 to 78	0, 39, 78	FHSS	GFSK	DH5

Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, antenna ports (if EUT with antenna diversity architecture), X, Y, Z Axis, and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE	AXIS
A	0 to 78	78	FHSS	GFSK	DH5	Z
B	0 to 78	78	FHSS	GFSK	DH5	Z

Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture), X, Y, Z Axis, and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE	AXIS
A	0 to 78	0, 39, 78	FHSS	GFSK	DH5	Z



Bandedge Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0, 78	FHSS	GFSK	DH5

Antenna Port Conducted Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0, 39, 78	FHSS	GFSK	DH5



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Mini PC. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	KEYBOARD	DELL	SK-8115	CN-OJ4635-71616-53A-OCAI	FCC DoC Approved
2	MOUSE	DELL	MO56U0	516056307	FCC DoC Approved
3	LCD MONITOR	ACER	AL1721	ET.L0408.010404001E6P K00	FCC DoC Approved
4	600Ω Load	NA	NA	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	1.6 m shielded cable without core
2	1.8 m shielded cable without core
3	1.2 m shielded cable without core
4	NA

NOTE: All power cords of the above support units are non shielded (1.8m).



4. TEST TYPES AND RESULTS (FOR 802.11b & g 2412~2462MHz BAND)

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Nov. 02, 2006
RF signal cable Woken	5D-FB	Cable-HyC02-01	Jan. 09, 2006
V-LISN SCHWARZBECK	NNBL 8226-2	8226-142	May. 02, 2006
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Jan. 20, 2006
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 3.
 3. The VCCI Site Registration No. is C-2047.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

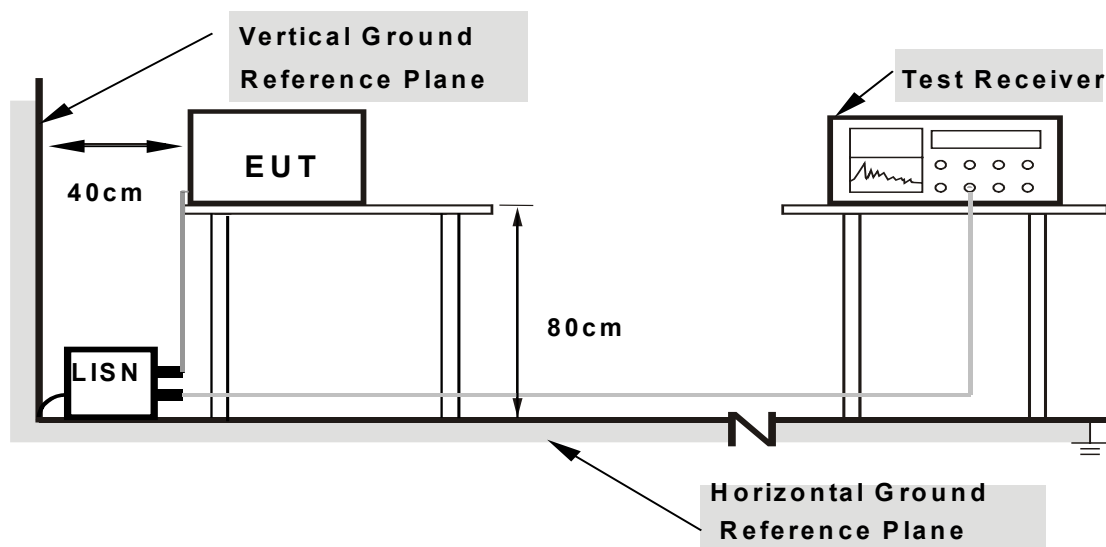

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on a testing table.
- b. The EUT ran a test program (provided by manufacturer) to enable all functions under transmission/receiving condition continuously at specific channel frequency.
- c. The EUT sent "H" messages to monitor.




4.1.7 TEST RESULTS

Conducted Worst-Case Data (For Adapter: 0335A1965)

EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	PHASE	Line 1
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A	TESTED BY	Long Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.11	51.11	-	51.22	-	66.00	56.00	-14.78	-
2	0.220	0.11	41.02	-	41.13	-	62.81	52.81	-21.68	-
3	0.732	0.18	28.17	-	28.35	-	56.00	46.00	-27.65	-
4	3.367	0.28	27.64	-	27.92	-	56.00	46.00	-28.08	-
5	17.322	0.75	31.96	-	32.71	-	60.00	50.00	-27.29	-
6	22.668	1.16	28.85	-	30.01	-	60.00	50.00	-29.99	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

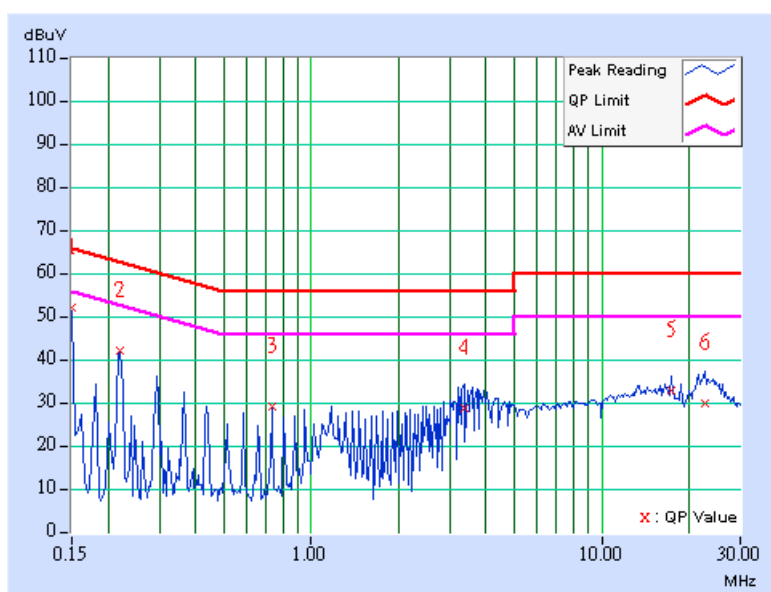




EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	PHASE	Line 2
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A	TESTED BY	Long Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.11	50.98	-	51.09	-	66.00	56.00	-14.91	-
2	0.224	0.11	35.72	-	35.83	-	62.66	52.66	-26.83	-
3	0.732	0.18	27.68	-	27.86	-	56.00	46.00	-28.14	-
4	3.941	0.29	31.06	-	31.35	-	56.00	46.00	-24.65	-
5	14.672	0.64	24.71	-	25.35	-	60.00	50.00	-34.65	-
6	21.961	1.07	28.66	-	29.73	-	60.00	50.00	-30.27	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

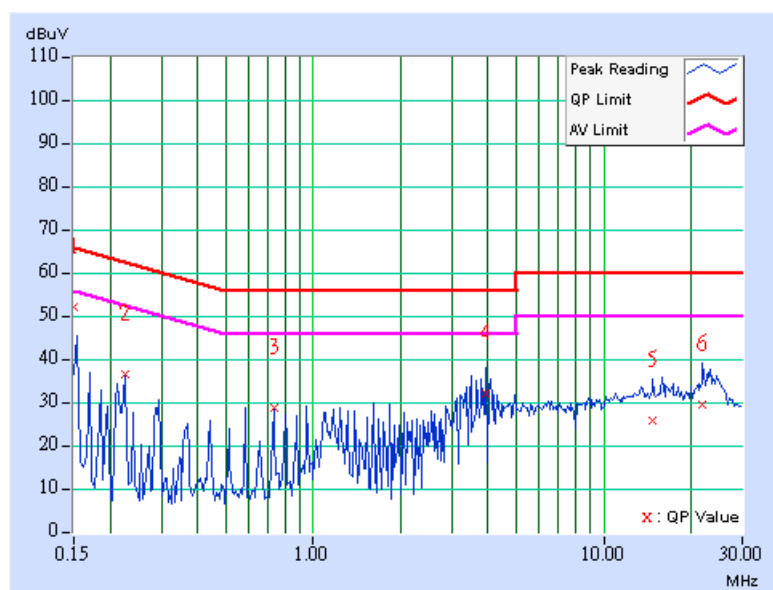




EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	PHASE	Line 1
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A	TESTED BY	Long Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.150	0.11	50.40	-	50.51	-	66.00
2	0.216	0.11	39.55	-	39.66	-	62.96	52.96	-23.29	-
3	0.947	0.22	26.44	-	26.66	-	56.00	46.00	-29.34	-
4	3.723	0.28	31.47	-	31.75	-	56.00	46.00	-24.25	-
5	16.570	0.69	26.51	-	27.20	-	60.00	50.00	-32.80	-
6	22.137	1.12	29.18	-	30.30	-	60.00	50.00	-29.70	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

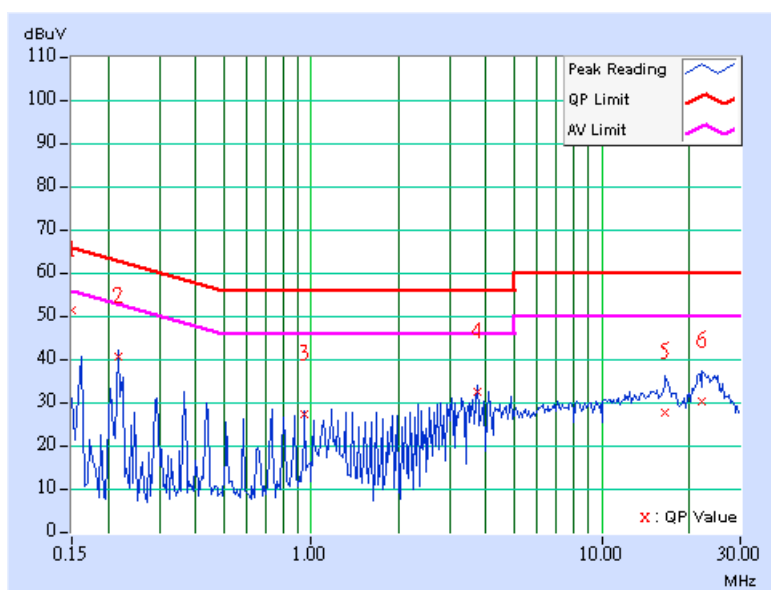




EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	PHASE	Line 2
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A	TESTED BY	Long Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.150	0.11	50.48	-	50.59	-	66.00
2	0.216	0.11	39.69	-	39.80	-	62.96	52.96	-23.15	-
3	1.094	0.23	27.49	-	27.72	-	56.00	46.00	-28.28	-
4	4.016	0.29	36.27	-	36.56	-	56.00	46.00	-19.44	-
5	18.172	0.86	25.70	-	26.56	-	60.00	50.00	-33.44	-
6	22.840	1.11	27.66	-	28.77	-	60.00	50.00	-31.23	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

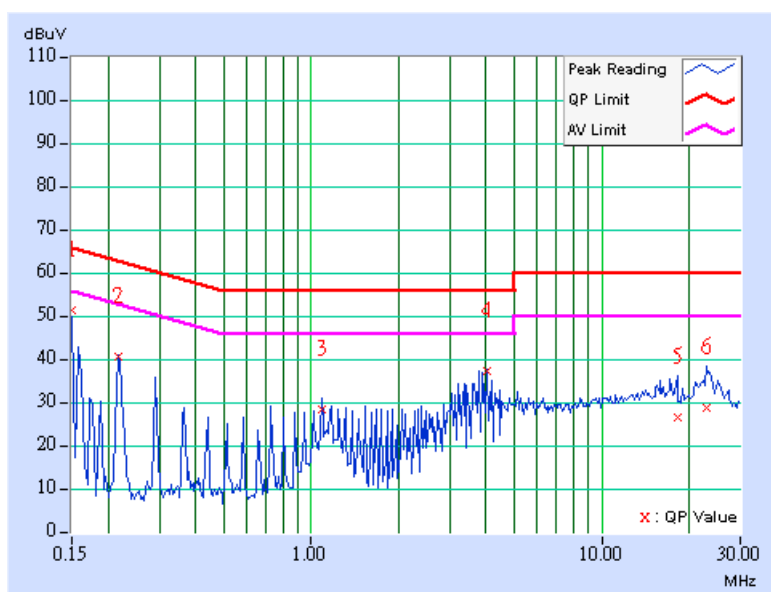




EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	PHASE	Line 1
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A	TESTED BY	Long Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.150	0.11	50.44	-	50.55	-	66.00
2	0.295	0.11	35.06	-	35.17	-	60.40	50.40	-25.22	-
3	1.094	0.23	27.14	-	27.37	-	56.00	46.00	-28.63	-
4	4.016	0.29	32.68	-	32.97	-	56.00	46.00	-23.03	-
5	17.164	0.74	28.89	-	29.63	-	60.00	50.00	-30.37	-
6	22.301	1.13	28.64	-	29.77	-	60.00	50.00	-30.23	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

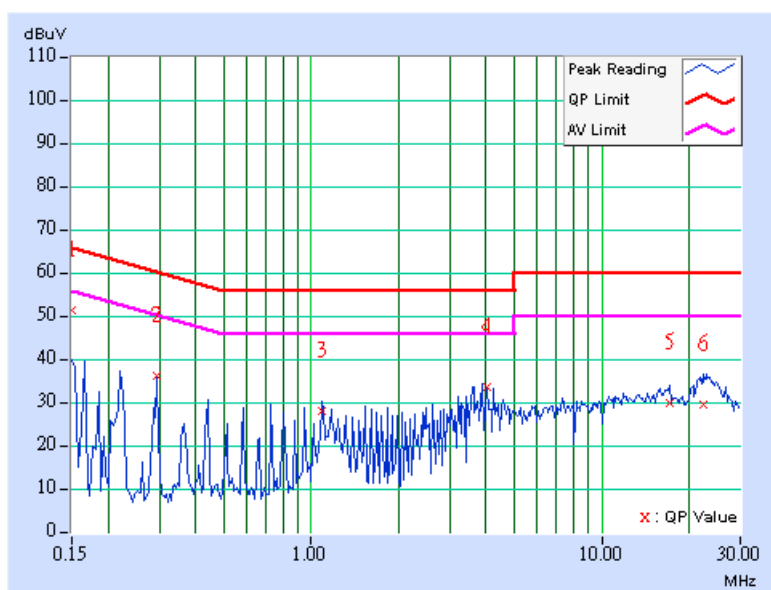




EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	PHASE	Line 2
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A	TESTED BY	Long Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.150	0.11	50.33	-	50.44	-	66.00
2	0.291	0.11	35.26	-	35.37	-	60.51	50.51	-25.13	-
3	0.728	0.18	27.98	-	28.16	-	56.00	46.00	-27.84	-
4	4.086	0.29	34.72	-	35.01	-	56.00	46.00	-20.99	-
5	16.566	0.75	28.49	-	29.24	-	60.00	50.00	-30.76	-
6	21.750	1.06	29.01	-	30.07	-	60.00	50.00	-29.93	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

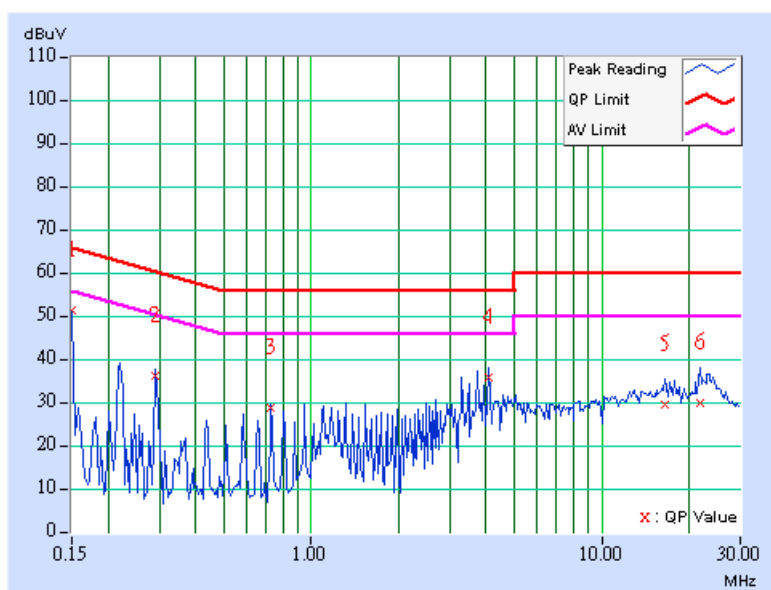




Conducted Worst-Case Data (For Adapter: PA-1650-02)

EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	PHASE	Line 1
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	B	TESTED BY	Long Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.150	0.11	43.73	-	43.84	-	66.00
2	0.213	0.11	42.30	-	42.41	-	63.11	53.11	-20.70	-
3	1.785	0.25	31.37	-	31.62	-	56.00	46.00	-24.38	-
4	3.859	0.29	35.82	-	36.11	-	56.00	46.00	-19.89	-
5	7.504	0.38	29.23	-	29.61	-	60.00	50.00	-30.39	-
6	20.875	1.04	27.82	-	28.86	-	60.00	50.00	-31.14	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

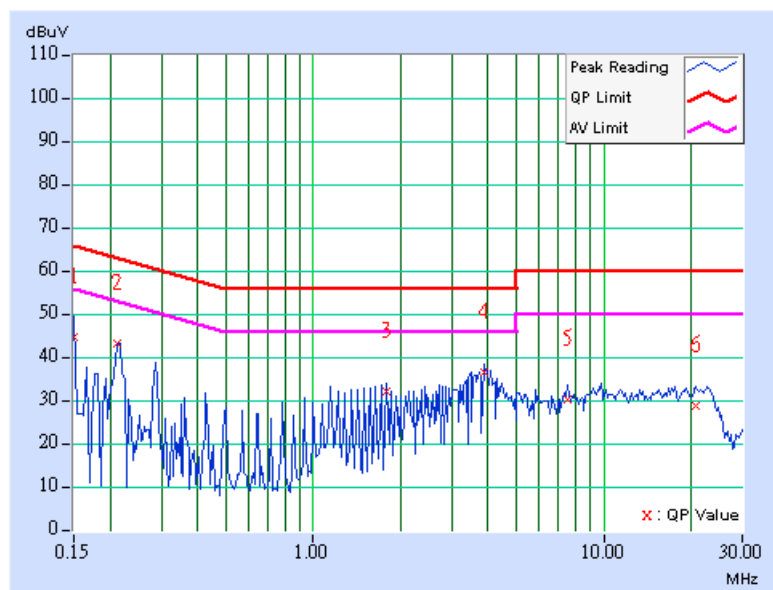




EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	PHASE	Line 2
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	B	TESTED BY	Long Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.11	44.36	-	44.47	-	66.00	56.00	-21.53	-
2	0.213	0.11	42.78	-	42.89	-	63.11	53.11	-20.22	-
3	1.574	0.24	32.12	-	32.36	-	56.00	46.00	-23.64	-
4	3.859	0.29	35.86	-	36.15	-	56.00	46.00	-19.85	-
5	7.578	0.44	31.01	-	31.45	-	60.00	50.00	-28.55	-
6	17.586	0.82	28.11	-	28.93	-	60.00	50.00	-31.07	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

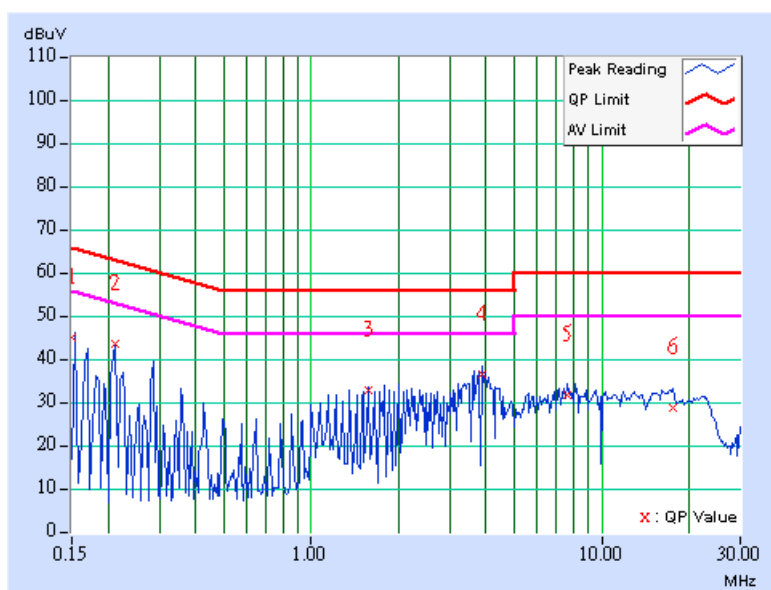




EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	PHASE	Line 1
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	B	TESTED BY	Long Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.150	0.11	43.16	-	43.27	-	66.00
2	0.216	0.11	41.69	-	41.80	-	62.96	52.96	-21.15	-
3	1.715	0.24	32.75	-	32.99	-	56.00	46.00	-23.01	-
4	3.930	0.29	35.58	-	35.87	-	56.00	46.00	-20.13	-
5	7.723	0.38	30.04	-	30.42	-	60.00	50.00	-29.58	-
6	22.730	1.16	27.35	-	28.51	-	60.00	50.00	-31.49	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

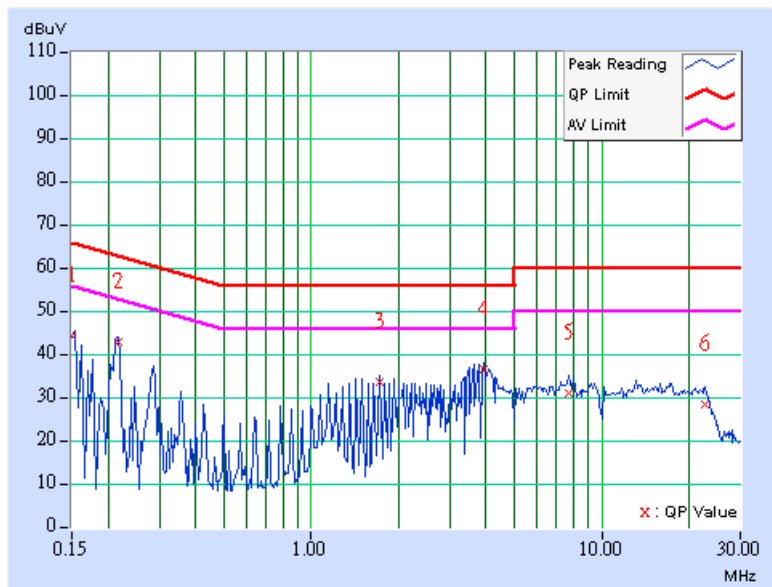




EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	PHASE	Line 2
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	B	TESTED BY	Long Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.150	0.11	43.75	-	43.86	-	66.00
2	0.216	0.11	42.93	-	43.04	-	62.96	52.96	-19.91	-
3	1.930	0.25	31.14	-	31.39	-	56.00	46.00	-24.61	-
4	4.074	0.29	34.11	-	34.40	-	56.00	46.00	-21.60	-
5	7.938	0.45	27.86	-	28.31	-	60.00	50.00	-31.69	-
6	22.582	1.10	28.26	-	29.36	-	60.00	50.00	-30.64	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

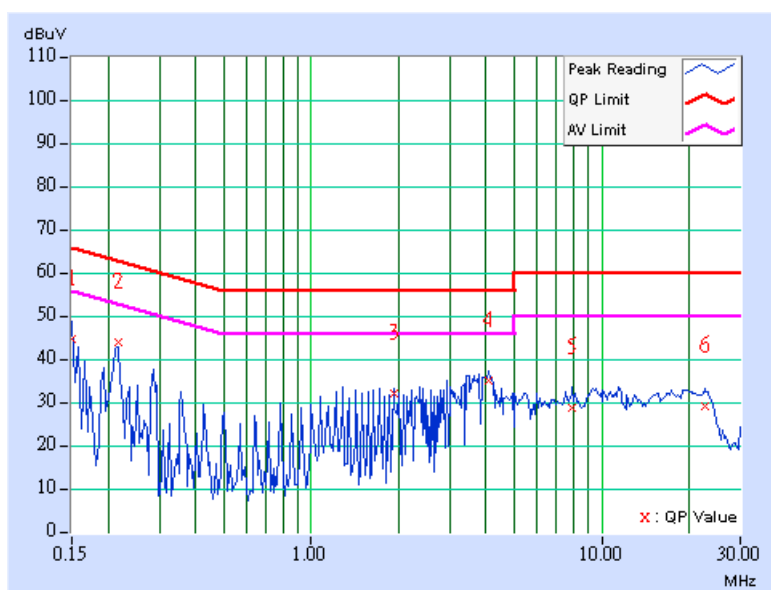




EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	PHASE	Line 1
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	B	TESTED BY	Long Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.11	41.85	-	41.96	-	66.00	56.00	-24.04	-
2	0.216	0.11	40.59	-	40.70	-	62.96	52.96	-22.25	-
3	1.645	0.24	32.37	-	32.61	-	56.00	46.00	-23.39	-
4	3.645	0.28	35.14	-	35.42	-	56.00	46.00	-20.58	-
5	10.223	0.44	28.55	-	28.99	-	60.00	50.00	-31.01	-
6	23.082	1.18	28.34	-	29.52	-	60.00	50.00	-30.48	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

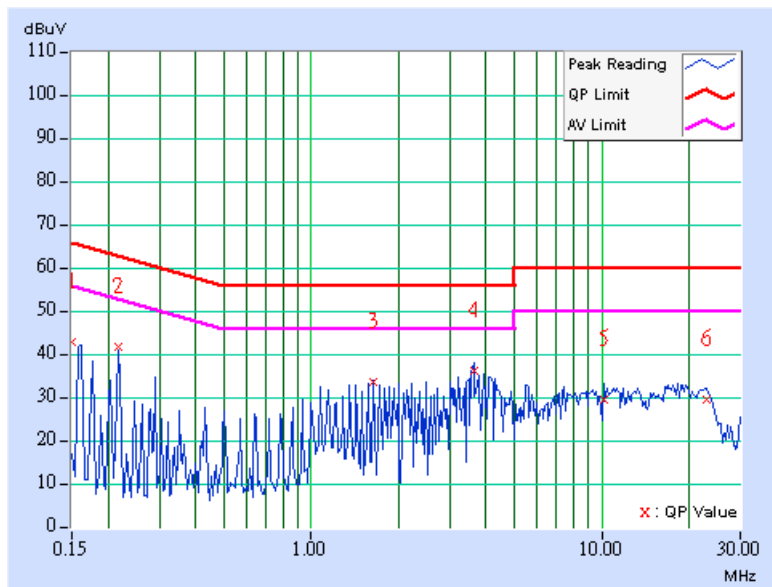




EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	PHASE	Line 2
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	B	TESTED BY	Long Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.150	0.11	42.12	-	42.23	-	66.00
2	0.216	0.11	40.70	-	40.81	-	62.96	52.96	-22.14	-
3	1.715	0.24	33.01	-	33.25	-	56.00	46.00	-22.75	-
4	3.645	0.28	35.20	-	35.48	-	56.00	46.00	-20.52	-
5	6.934	0.41	30.39	-	30.80	-	60.00	50.00	-29.20	-
6	21.156	1.03	27.40	-	28.43	-	60.00	50.00	-31.57	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

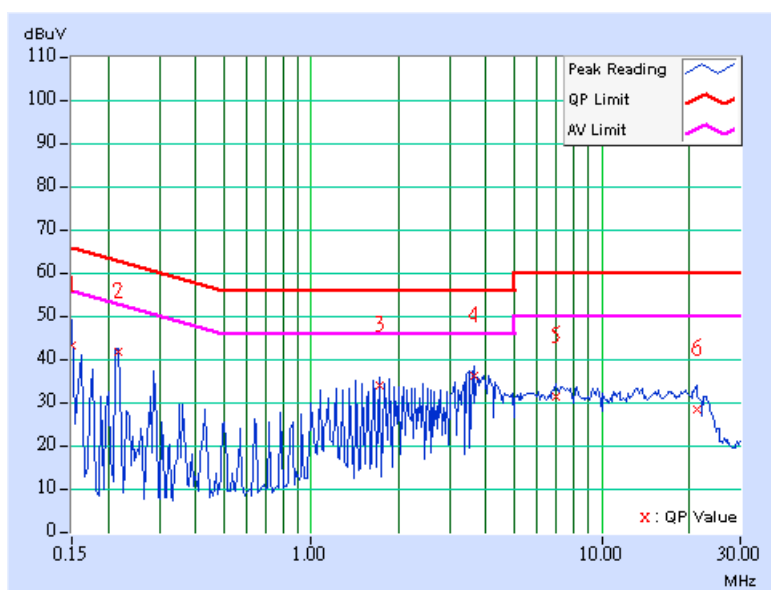



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	100033	May. 19, 2006
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100025	Dec. 05, 2006
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Jun. 01, 2006
HORN Antenna SCHWARZBECK	9120D	9120D-408	Jan. 17, 2006
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Jan. 23, 2006
Preamplifier Agilent	8447D	2944A10633	Nov. 04, 2006
Preamplifier Agilent	8449B	3008A01964	Oct. 30, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218183/4	Jan. 26, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218195/4	Jan. 26, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA
Turn Table ADT.	TT100.	TT93021703	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 2.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The VCCI Site Registration No. is R-237.
 5. The IC Site Registration No. is IC4924-3.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth are 100 Hz(for 802.11b) and 1kHz (for 802.11g) for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

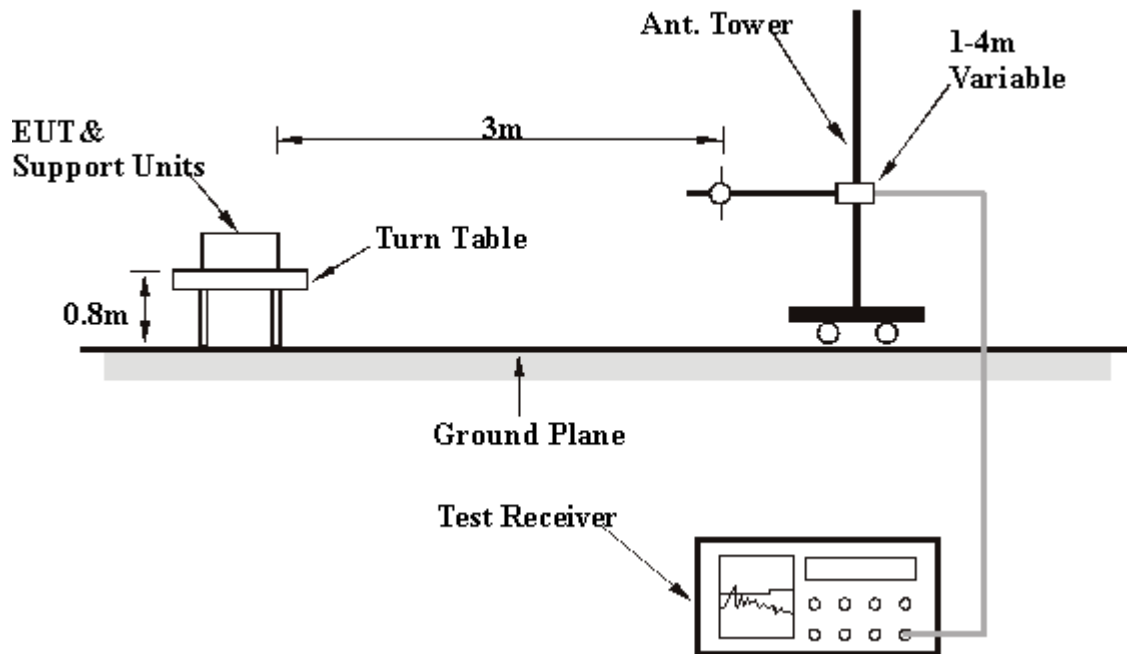

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



4.2.7 TEST RESULTS

Below 1GHz Worst-Case Data (For Adapter: 0335A1965)

EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A	TESTED BY	Morgan Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	47.49	27.86 QP	40.00	-12.14	1.25 H	262	13.18	14.68
2	189.40	30.27 QP	43.50	-13.23	1.50 H	233	18.53	11.74
3	226.33	33.43 QP	46.00	-12.57	1.75 H	319	21.47	11.96
4	490.70	33.01 QP	46.00	-12.99	1.75 H	238	12.96	20.05
5	589.84	35.69 QP	46.00	-10.31	1.00 H	319	13.14	22.55
6	615.11	32.85 QP	46.00	-13.15	2.00 H	268	9.84	23.01
7	638.44	36.55 QP	46.00	-9.45	1.25 H	280	13.39	23.16
8	712.30	32.06 QP	46.00	-13.94	1.25 H	274	7.68	24.37

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	47.49	31.88 QP	40.00	-8.12	1.00 V	82	17.32	14.56
2	72.77	30.95 QP	40.00	-9.05	1.25 V	319	19.14	11.81
3	96.09	32.82 QP	43.50	-10.68	1.50 V	337	23.47	9.35
4	158.30	36.31 QP	43.50	-7.19	1.25 V	250	22.55	13.76
5	162.18	34.72 QP	43.50	-8.78	1.75 V	238	21.09	13.63
6	490.70	35.83 QP	46.00	-10.17	1.00 V	298	15.60	20.23
7	589.84	37.46 QP	46.00	-8.54	2.00 V	45	14.67	22.79
8	615.11	34.03 QP	46.00	-11.97	1.75 V	184	10.76	23.27
9	638.44	33.51 QP	46.00	-12.49	1.25 V	109	10.05	23.46

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.


Below 1GHz Worst-Case Data (For Adapter: PA-1650-02)

EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	B	TESTED BY	Morgan Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	59.16	26.55 QP	40.00	-13.45	1.00 H	214	12.91	13.64
2	156.35	30.86 QP	43.50	-12.64	1.00 H	256	17.15	13.71
3	193.29	29.74 QP	43.50	-13.76	1.00 H	319	18.18	11.55
4	226.33	33.01 QP	46.00	-12.99	1.00 H	319	21.05	11.96
5	230.22	32.74 QP	46.00	-13.26	1.25 H	82	20.67	12.07
6	323.53	34.27 QP	46.00	-11.73	1.00 H	214	18.08	16.18

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	59.16	36.03 QP	40.00	-3.97	1.25 V	187	22.38	13.64
2	63.05	33.81 QP	40.00	-6.19	1.00 V	40	20.61	13.21
3	96.09	33.04 QP	43.50	-10.46	1.00 V	40	23.67	9.37
4	144.69	27.20 QP	43.50	-16.30	1.00 V	40	13.80	13.40
5	193.29	26.68 QP	43.50	-16.82	1.00 V	157	15.13	11.55
6	323.53	32.20 QP	46.00	-13.80	1.25 V	187	16.02	16.18
7	453.77	30.40 QP	46.00	-15.60	1.25 V	208	11.27	19.13
8	589.84	30.39 QP	46.00	-15.61	1.00 V	157	7.84	22.55
9	908.64	28.05 QP	46.00	-17.95	1.00 V	40	0.78	27.27
10	972.79	36.78 QP	54.00	-17.22	1.00 V	58	8.85	27.93

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



802.11b DSSS modulation

EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	DBPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 62%RH, 991hPa
TRANSFER RATE	1Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2386.00	51.43 PK	74.00	-22.57	1.10 H	211	19.60	31.83
1	2386.00	47.40 AV	54.00	-6.60	1.10 H	211	15.57	31.83
2	*2412.00	107.09 PK			1.10 H	211	75.15	31.94
2	*2412.00	103.06 AV			1.10 H	211	71.12	31.94
3	4824.00	47.93 PK	74.00	-26.07	1.08 H	333	9.34	38.58
3	4824.00	42.04 AV	54.00	-11.96	1.08 H	333	3.45	38.58
4	7236.00	51.41 PK	74.00	-22.59	1.63 H	349	6.70	44.71
4	7236.00	43.57 AV	54.00	-10.43	1.63 H	349	-1.14	44.71

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2386.00	53.43 PK	74.00	-20.57	1.22 V	281	21.60	31.83
1	2386.00	49.35 AV	54.00	-4.65	1.22 V	281	17.52	31.83
2	*2412.00	109.03 PK			1.22 V	281	77.09	31.94
2	*2412.00	105.01 AV			1.22 V	281	73.07	31.94
3	4824.00	46.13 PK	74.00	-27.87	1.15 V	159	7.54	38.58
3	4824.00	37.71 AV	54.00	-16.29	1.15 V	159	-0.88	38.58
4	7236.00	50.83 PK	74.00	-23.17	1.24 V	40	6.12	44.71
4	7236.00	43.02 AV	54.00	-10.98	1.24 V	40	-1.69	44.71

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	DBPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 62%RH, 991hPa
TRANSFER RATE	1Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	109.24 PK			1.24 H	27	77.14	32.10
1	2437.00	105.18 AV			1.24 H	27	73.08	32.10
2	4874.00	49.21 PK	74.00	-24.79	1.01 H	323	10.63	38.58
2	4874.00	44.36 AV	54.00	-9.64	1.01 H	323	5.78	38.58
3	7311.00	52.64 PK	74.00	-21.36	1.18 H	325	7.69	44.95
3	7311.00	44.82 AV	54.00	-9.18	1.18 H	325	-0.13	44.95

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	111.23 PK			1.19 V	277	79.13	32.10
1	*2437.00	107.21 AV			1.19 V	277	75.11	32.10
2	4874.00	48.25 PK	74.00	-25.75	1.10 V	134	9.67	38.58
2	4874.00	39.86 AV	54.00	-14.14	1.10 V	134	1.28	38.58
3	7311.00	51.94 PK	74.00	-22.06	1.21 V	38	6.99	44.95
3	7311.00	43.25 AV	54.00	-10.75	1.21 V	38	-1.70	44.95

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	DBPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 62%RH, 991hPa
TRANSFER RATE	1Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.15 PK			1.25 H	34	76.89	32.26
1	*2462.00	105.07 AV			1.25 H	34	72.81	32.26
2	2483.50	50.85 PK	74.00	-23.15	1.25 H	34	18.45	32.40
2	2483.50	46.77 AV	54.00	-7.23	1.25 H	34	14.37	32.40
3	4924.00	49.62 PK	74.00	-24.38	1.03 H	206	11.07	38.55
3	4924.00	44.78 AV	54.00	-9.22	1.03 H	206	6.23	38.55
4	7386.00	52.89 PK	74.00	-21.11	1.10 H	337	7.62	45.27
4	7386.00	45.07 AV	54.00	-8.93	1.10 H	337	-0.20	45.27

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.71 PK			1.17 V	249	78.44	32.26
1	*2462.00	106.64 AV			1.17 V	249	74.37	32.26
2	2483.50	52.41 PK	74.00	-21.59	1.17 V	249	20.01	32.40
2	2483.50	48.34 AV	54.00	-5.66	1.17 V	249	15.94	32.40
3	4924.00	48.32 PK	74.00	-25.68	1.08 V	127	9.77	38.55
3	4924.00	39.95 AV	54.00	-14.05	1.08 V	127	1.40	38.55
4	7386.00	52.24 PK	74.00	-21.76	1.14 V	51	6.97	45.27
4	7386.00	43.56 AV	54.00	-10.44	1.14 V	51	-1.71	45.27

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



802.11g OFDM modulation

EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 62%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.36 PK	74.00	-6.64	1.10 H	208	35.52	31.84
1	2390.00	51.51 AV	54.00	-2.49	1.10 H	208	19.67	31.84
2	*2412.00	104.17 PK			1.10 H	208	72.23	31.94
2	*2412.00	95.02 AV			1.10 H	208	63.08	31.94
3	4824.00	45.21 PK	74.00	-28.79	1.05 H	236	6.63	38.58
3	4824.00	33.12 AV	54.00	-20.88	1.05 H	236	-5.46	38.58
4	7236.00	51.83 PK	74.00	-22.17	1.13 H	74	7.12	44.71
4	7236.00	38.62 AV	54.00	-15.38	1.13 H	74	-6.09	44.71

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.74 PK	74.00	-4.26	1.20 V	201	37.90	31.84
1	2390.00	52.72 AV	54.00	-1.28	1.20 V	201	20.88	31.84
2	*2412.00	104.96 PK			1.20 V	201	73.02	31.94
2	*2412.00	95.94 AV			1.20 V	201	64.00	31.94
3	4824.00	46.77 PK	74.00	-27.23	1.03 V	214	8.18	38.58
3	4824.00	34.67 AV	54.00	-19.33	1.03 V	214	-3.92	38.58
4	7236.00	52.91 PK	74.00	-21.09	1.11 V	22	8.20	44.71
4	7236.00	39.70 AV	54.00	-14.30	1.11 V	22	-5.01	44.71

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 62%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	105.82 PK			1.11 H	204	73.72	32.10
1	*2437.00	96.71 AV			1.11 H	204	64.61	32.10
2	4874.00	46.22 PK	74.00	-27.78	1.09 H	28	7.64	38.58
2	4874.00	34.01 AV	54.00	-19.99	1.09 H	28	-4.57	38.58
3	7311.00	52.61 PK	74.00	-21.39	1.21 H	207	7.66	44.95
3	7311.00	39.52 AV	54.00	-14.48	1.21 H	207	-5.43	44.95

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	106.97 PK			1.20 V	201	74.87	32.10
1	*2437.00	97.85 AV			1.20 V	201	65.75	32.10
2	4874.00	47.35 PK	74.00	-26.65	1.10 V	214	8.77	38.58
2	4874.00	35.28 AV	54.00	-18.72	1.10 V	214	-3.30	38.58
3	7311.00	53.94 PK	74.00	-20.06	1.10 V	82	8.99	44.95
3	7311.00	40.76 AV	54.00	-13.24	1.10 V	82	-4.19	44.95

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 62%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	103.77 PK			1.19 H	207	71.51	32.26
1	*2462.00	94.68 AV			1.19 H	207	62.42	32.26
2	2483.50	66.90 PK	74.00	-7.10	1.19 H	207	34.50	32.40
2	2483.50	50.96 AV	54.00	-3.04	1.19 H	207	18.56	32.40
3	4924.00	46.35 PK	74.00	-27.65	1.03 H	211	7.80	38.55
3	4924.00	34.28 AV	54.00	-19.72	1.03 H	211	-4.27	38.55
4	7386.00	52.17 PK	74.00	-21.83	1.12 H	44	6.90	45.27
4	7386.00	39.01 AV	54.00	-14.99	1.12 H	44	-6.26	45.27

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	104.89 PK			1.18 V	205	72.63	32.26
1	*2462.00	95.79 AV			1.18 V	205	63.53	32.26
2	2483.50	68.02 PK	74.00	-5.98	1.18 V	205	35.62	32.40
2	2483.50	52.08 AV	54.00	-1.92	1.18 V	205	19.68	32.40
3	4924.00	47.23 PK	74.00	-26.77	1.10 V	196	8.68	38.55
3	4924.00	35.18 AV	54.00	-18.82	1.10 V	196	-3.37	38.55
4	7386.00	53.24 PK	74.00	-20.76	1.08 V	53	7.97	45.27
4	7386.00	40.07 AV	54.00	-13.93	1.08 V	53	-5.20	45.27

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK 30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

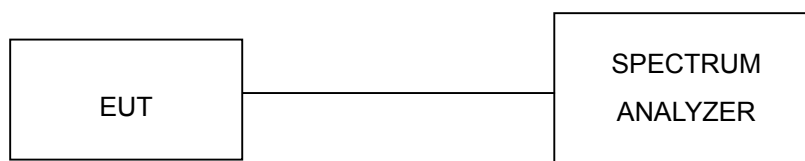

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.3.7 TEST RESULTS


802.11b DSSS modulation

EUT	Mini PC	MODEL	P60
MODULATION TYPE	BPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 54%RH, 991hPa
TESTED BY	Long Chen		


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	9.12	0.5	PASS
6	2437	9.12	0.5	PASS
11	2462	9.12	0.5	PASS



CH 1

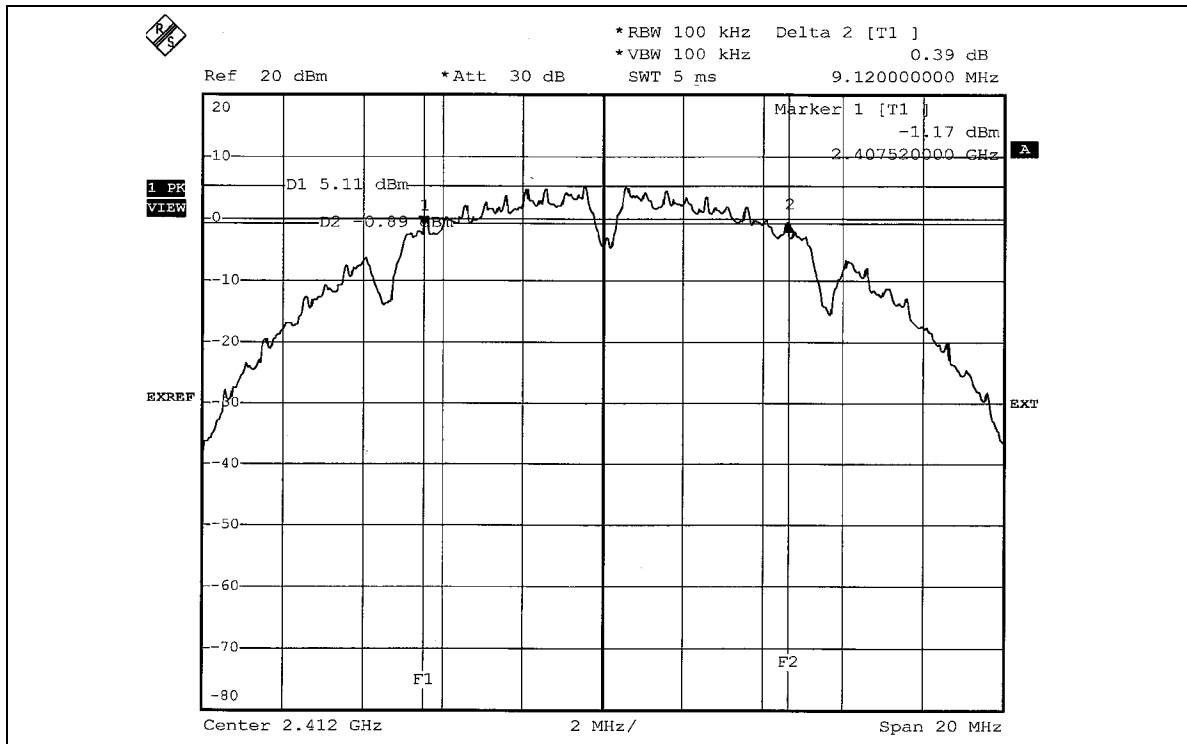


CH 6

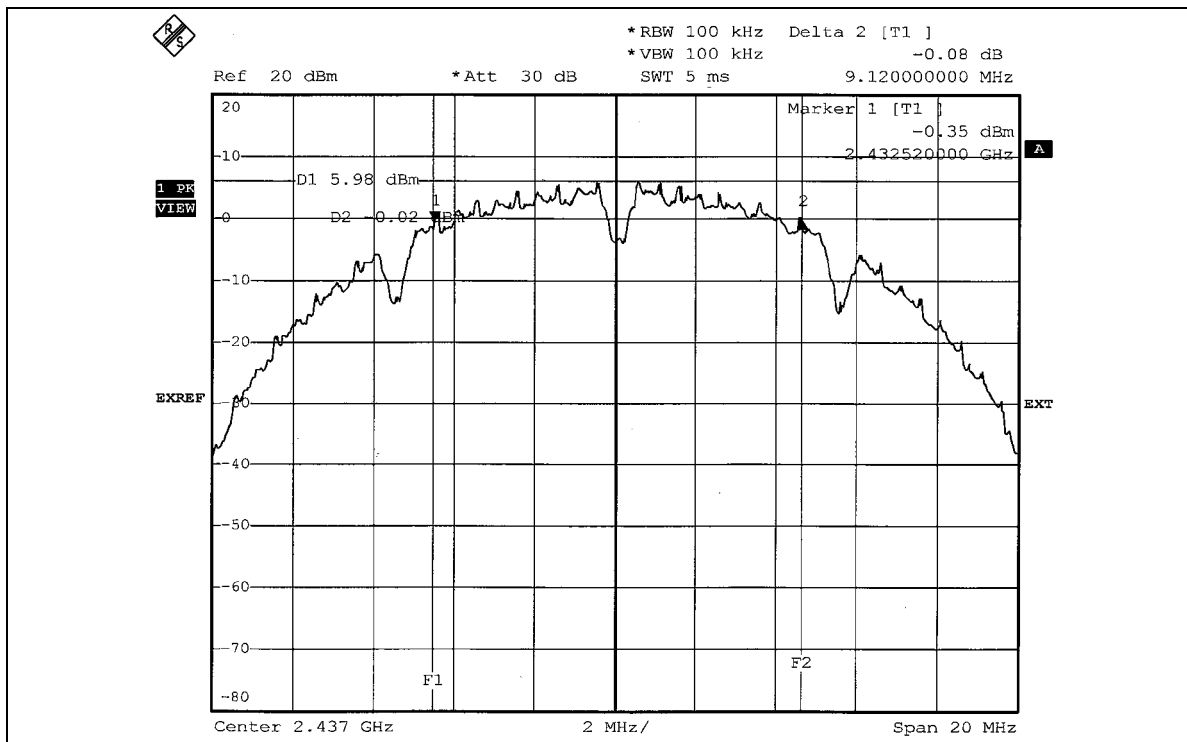



CH 11

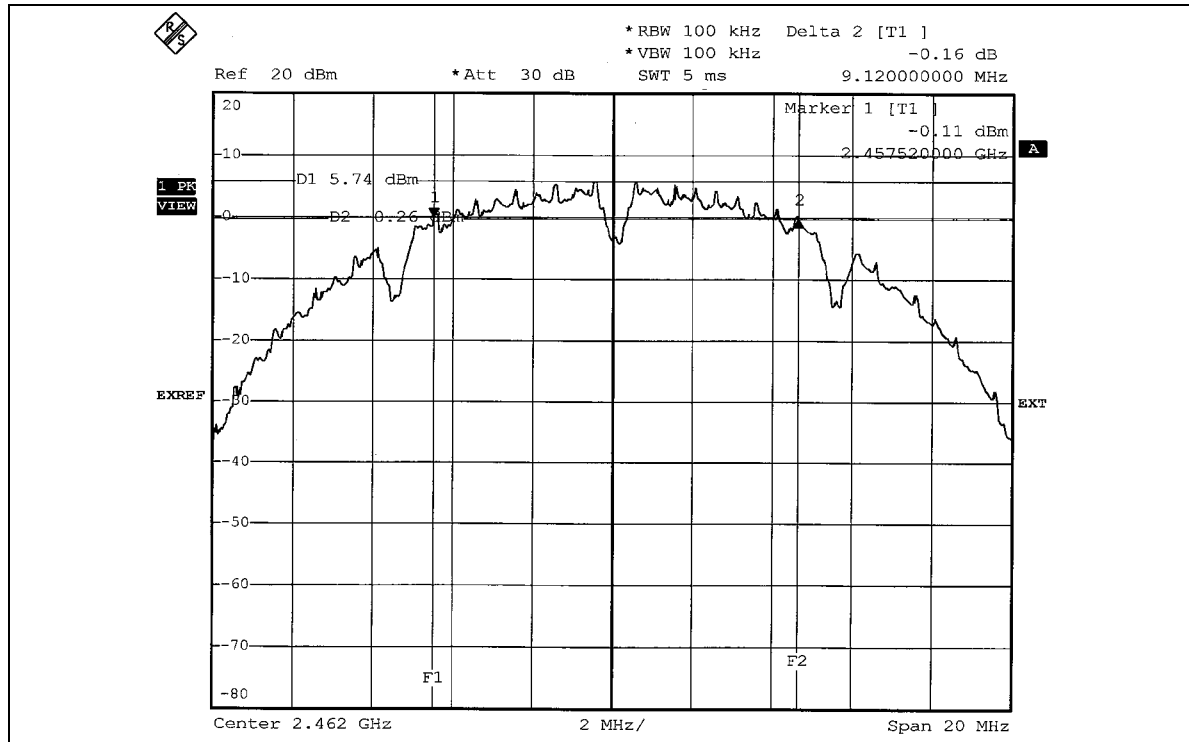




802.11g OFDM modulation

EUT	Mini PC	MODEL	P60
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 54%RH, 991hPa
TESTED BY	Long Chen		


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.48	0.5	PASS
6	2437	16.36	0.5	PASS
11	2462	16.44	0.5	PASS



CH 1

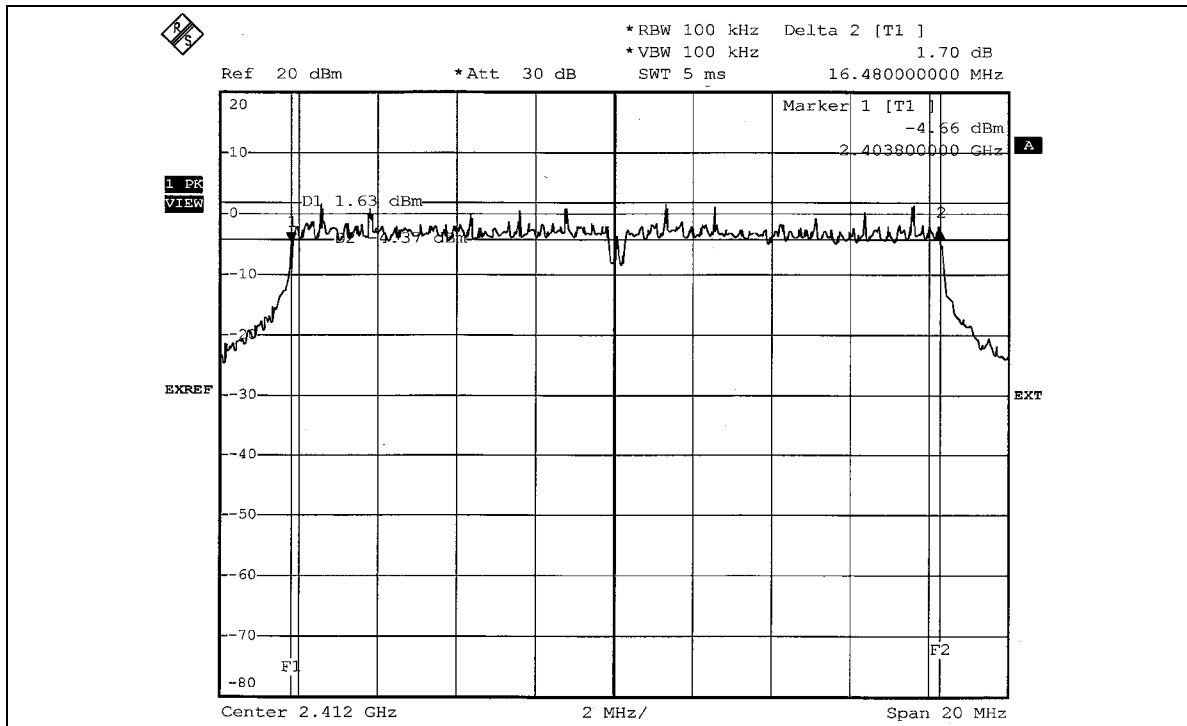


CH 6

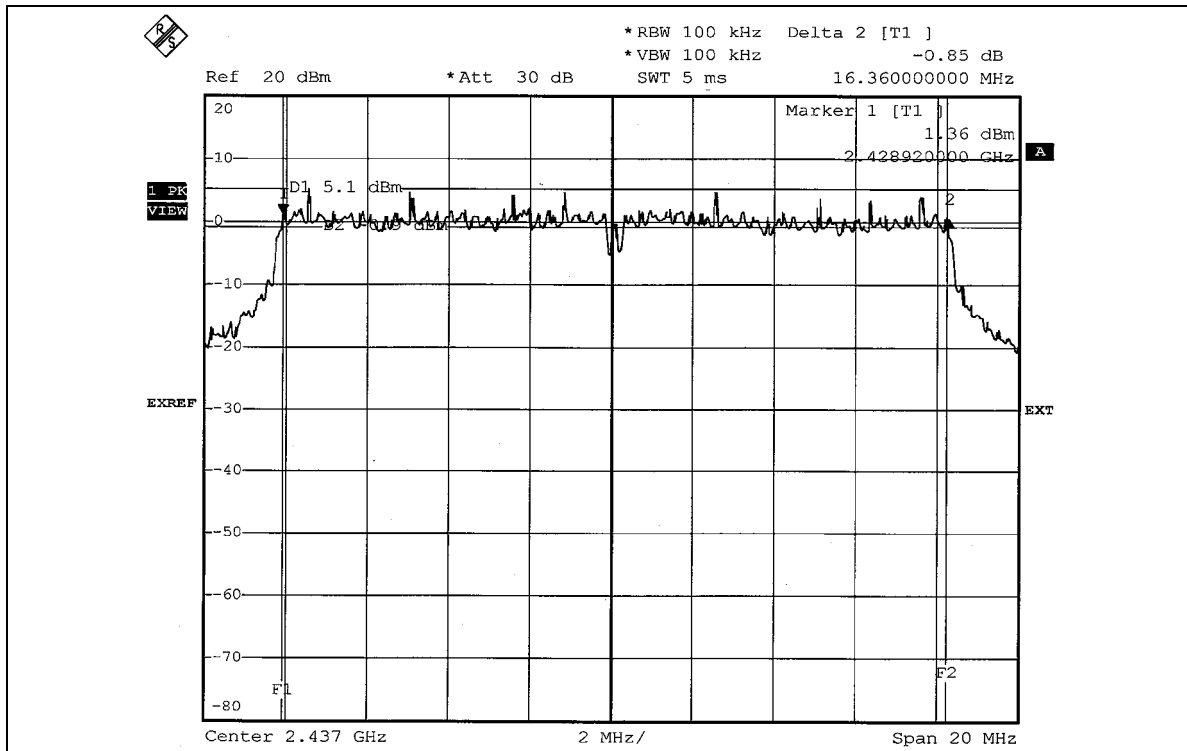



CH 11

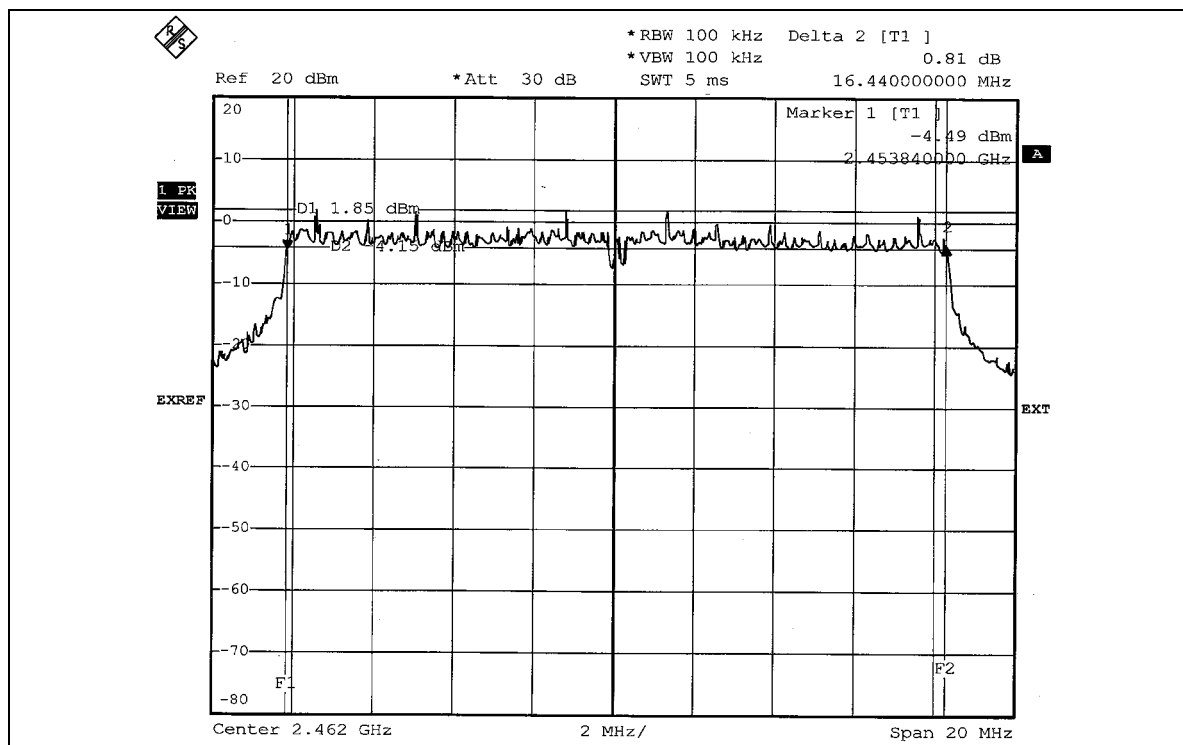



4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 30, 2006
TEKTRONIX OSCILLOSCOPE	TDS 1012	C019167	Feb. 01, 2006
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.



4.4.1 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.4.2 DEVIATION FROM TEST STANDARD

No deviation

4.4.3 TEST SETUP



4.4.4 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.3 TEST RESULTS

802.11b DSSS modulation

EUT	Mini PC	MODEL	P60
MODULATION TYPE	BPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 54%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	72.277	18.59	30	PASS
6	2437	71.450	18.54	30	PASS
11	2462	70.958	18.51	30	PASS

802.11g OFDM modulation

EUT	Mini PC	MODEL	P60
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 54%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	50.350	17.02	30	PASS
6	2437	80.538	19.06	30	PASS
11	2462	50.582	17.04	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

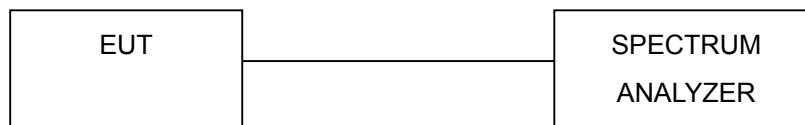

4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6



4.5.7 TEST RESULTS


802.11b DSSS modulation

EUT	Mini PC	MODEL	P60
MODULATION TYPE	BPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 54%RH, 991hPa
TESTED BY	Long Chen		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-9.39	8	PASS
6	2437	-9.33	8	PASS
11	2462	-9.38	8	PASS



CH 1

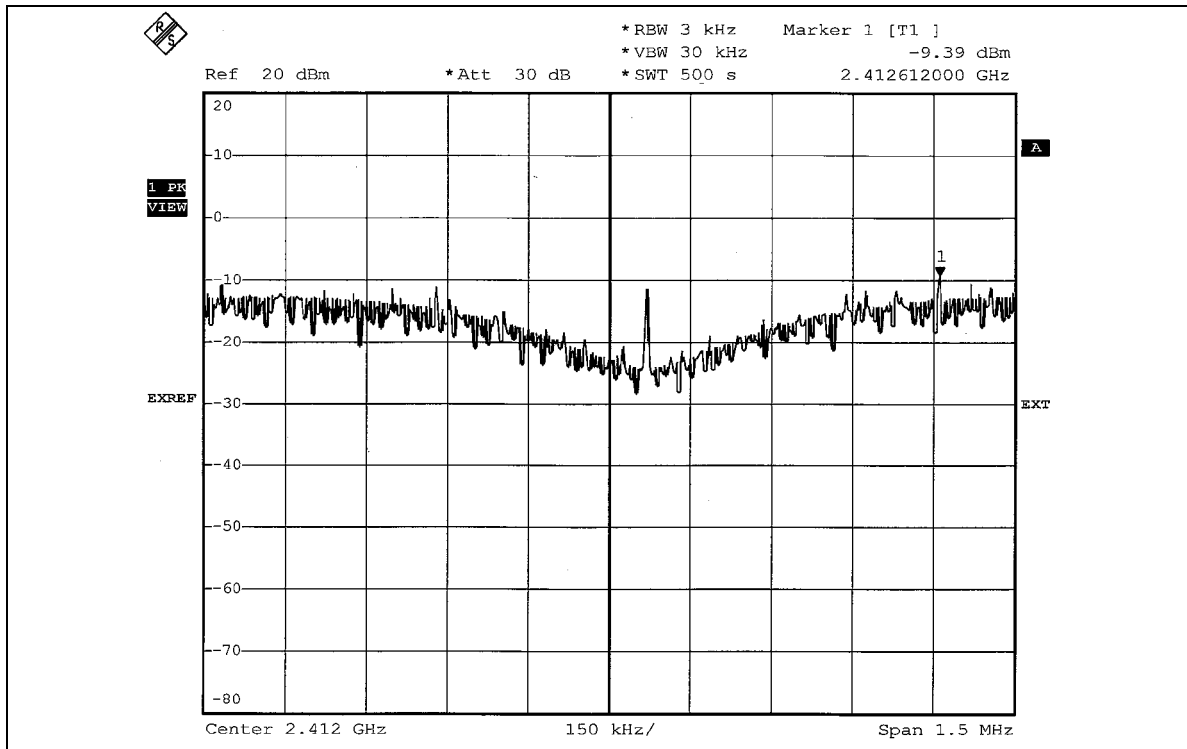


CH 6

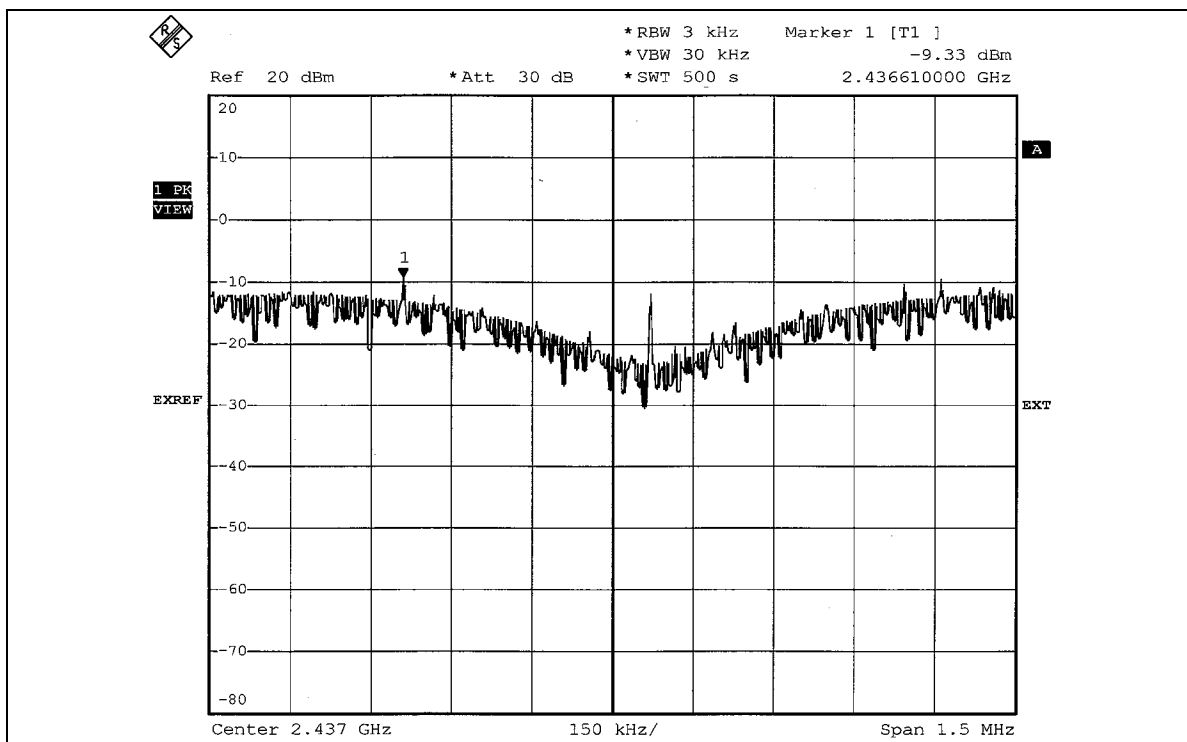



CH 11

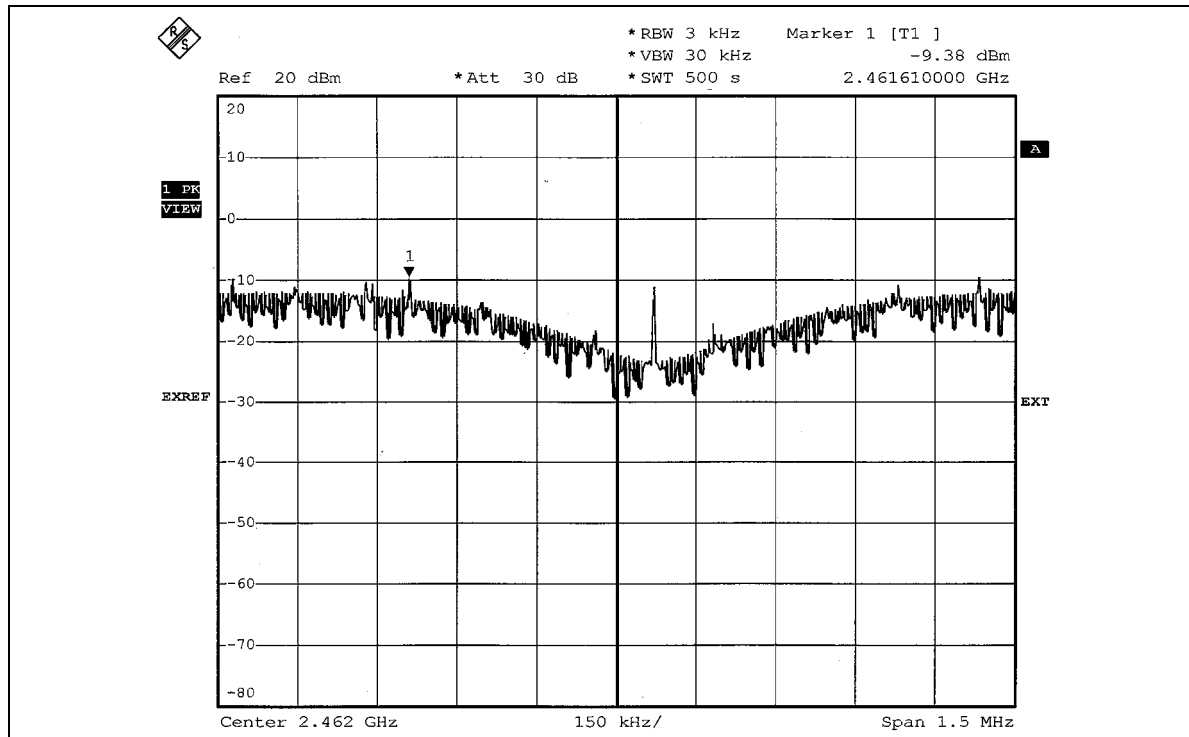




802.11g OFDM modulation

EUT	Mini PC	MODEL	P60
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 54%RH, 991hPa
TESTED BY	Long Chen		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-6.79	8	PASS
6	2437	-4.36	8	PASS
11	2462	-6.55	8	PASS



CH 1

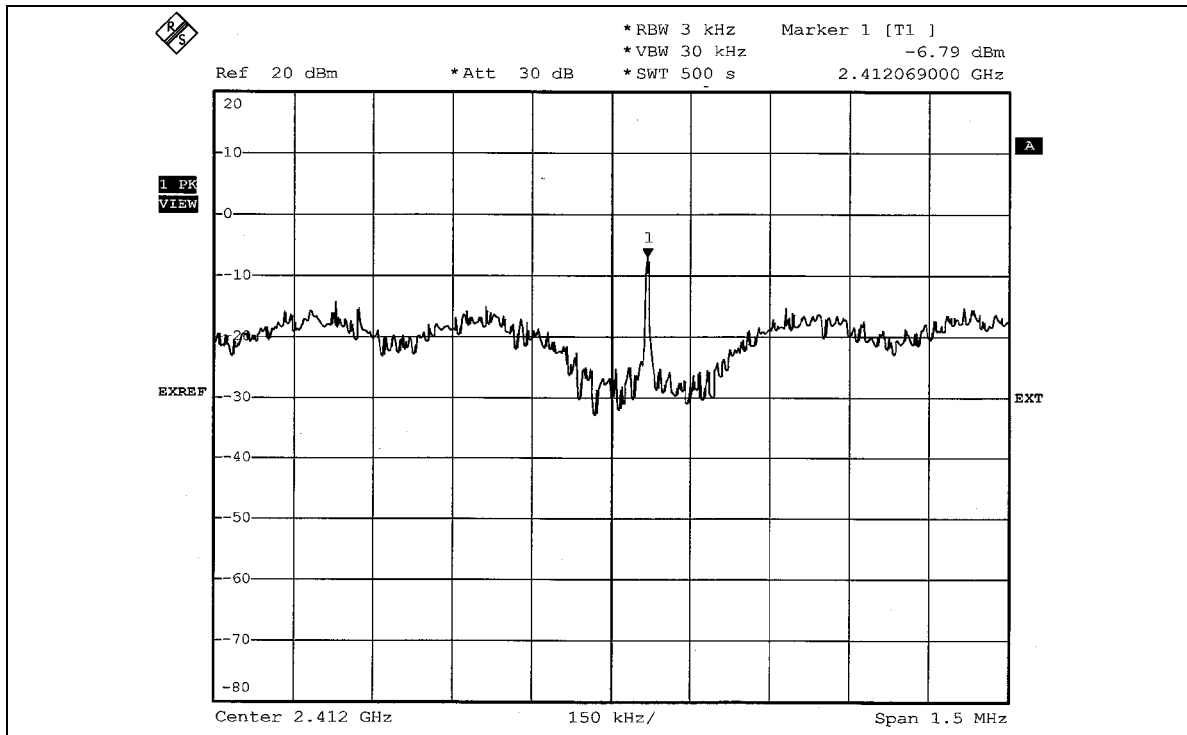


CH 6

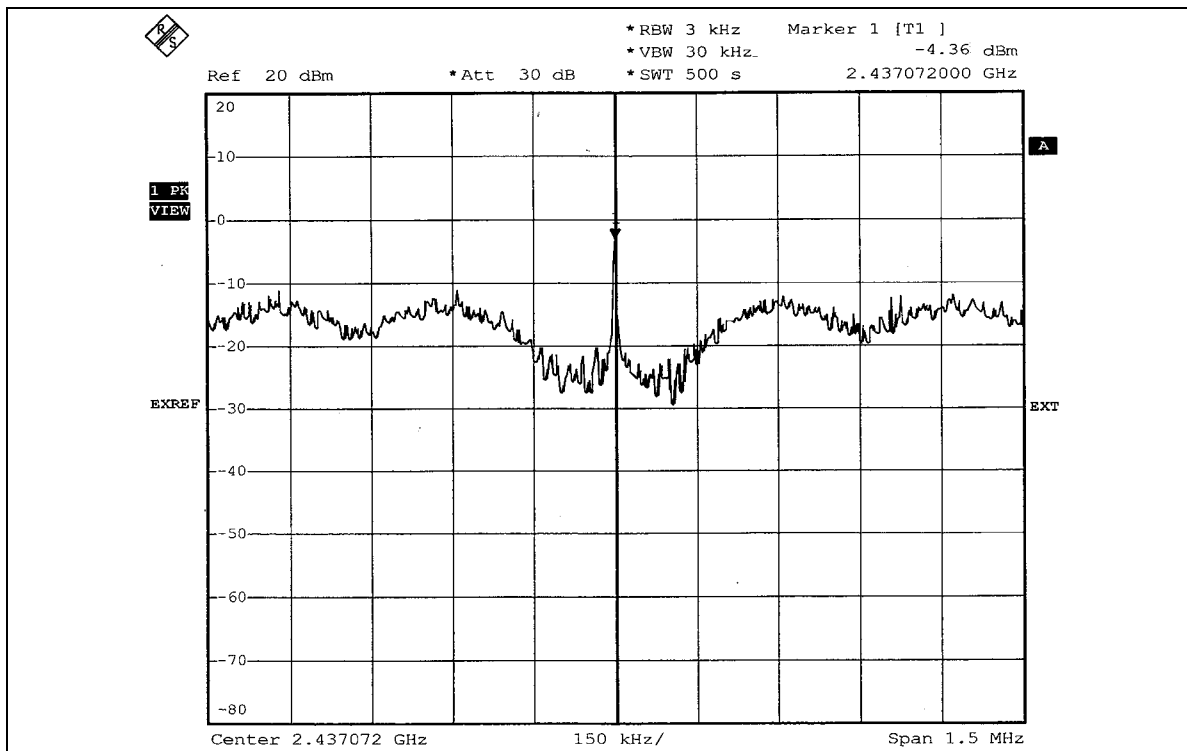



CH 11

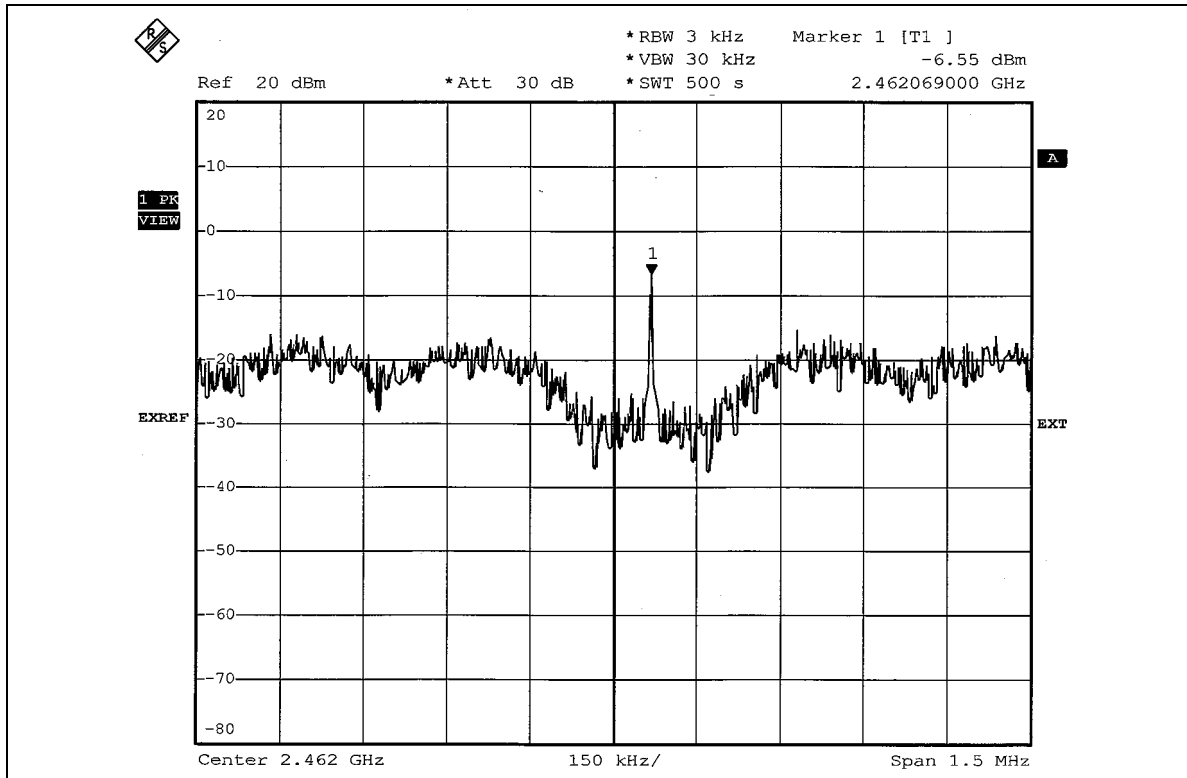



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW=VBW=100kHz; Average RBW=1MHz, VBW=100Hz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6



4.6.6 TEST RESULTS

The spectrum plots are attached on the following 12 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).



802.11b DSSS modulation



NOTE 1: The band edge emission plot on page 68 shows 54.48dBc between carrier maximum power and local maximum emission in restrict band (2.3672GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 109.03dBuV/m (Peak), so the maximum field strength in restrict band is $109.03 - 54.48 = 54.45$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of on page 68 shows 64.43dBc between carrier maximum power and local maximum emission in restrict band (2.3720GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 105.01dBuV/m (Average), so the maximum field strength in restrict band is $105.01 - 64.43 = 40.58$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on page 69 shows 54.76dBc between carrier maximum power and local maximum emission in restrict band (2.4862GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 110.71dBuV/m (Peak), so the maximum field strength in restrict band is $110.71 - 54.76 = 55.95$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on page 70 shows 62.79dBc between carrier maximum power and local maximum emission in restrict band (2.4994GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 106.64dBuV/m (Average), so the maximum field strength in restrict band is $106.64 - 62.79 = 43.85$ dBuV/m which is under 54dBuV/m limit.

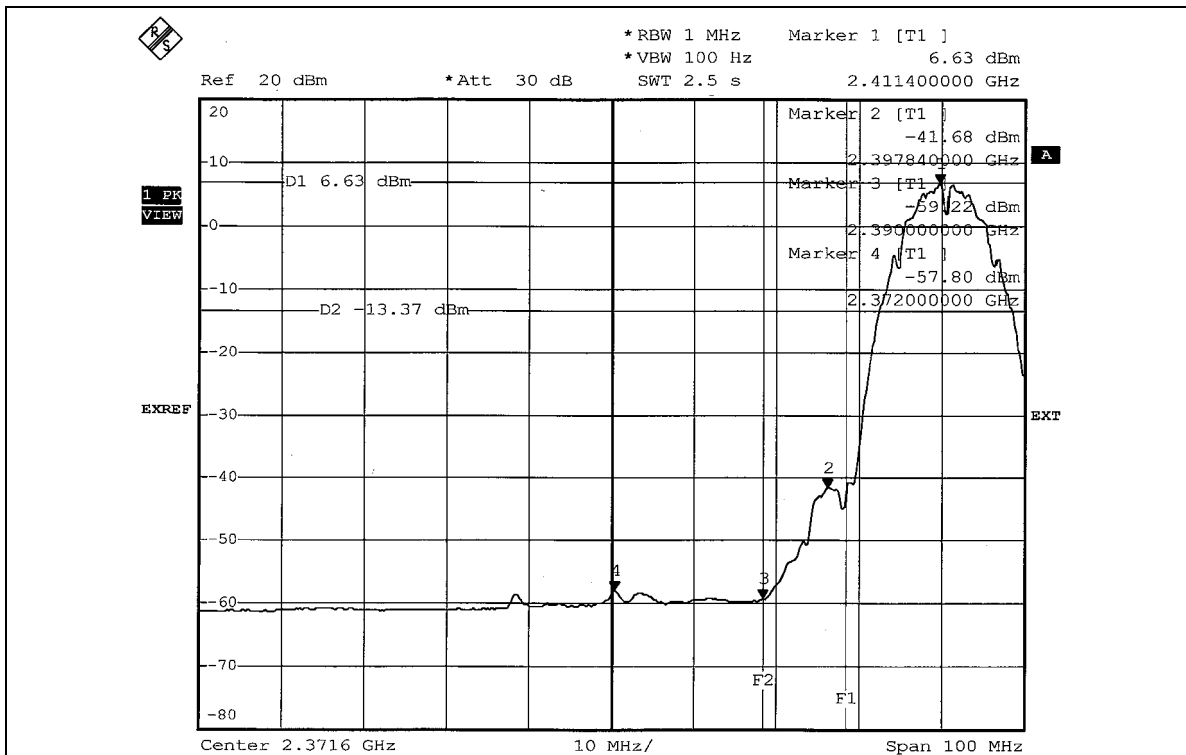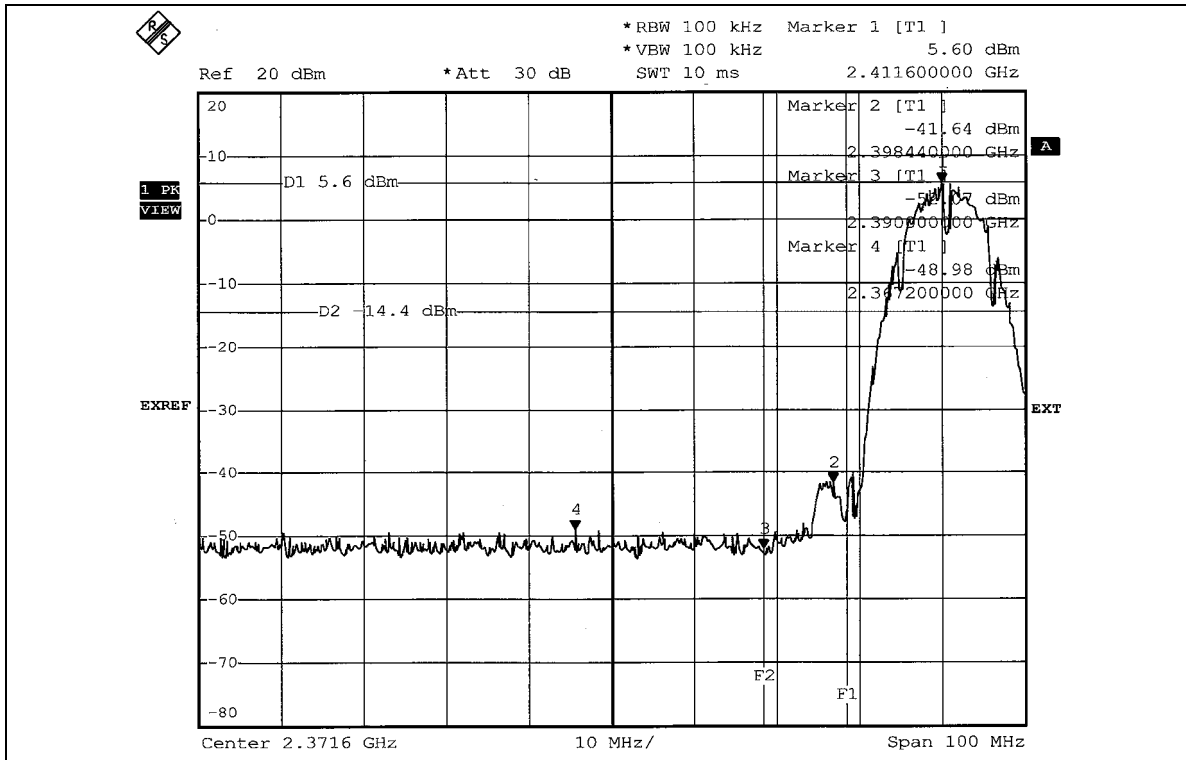

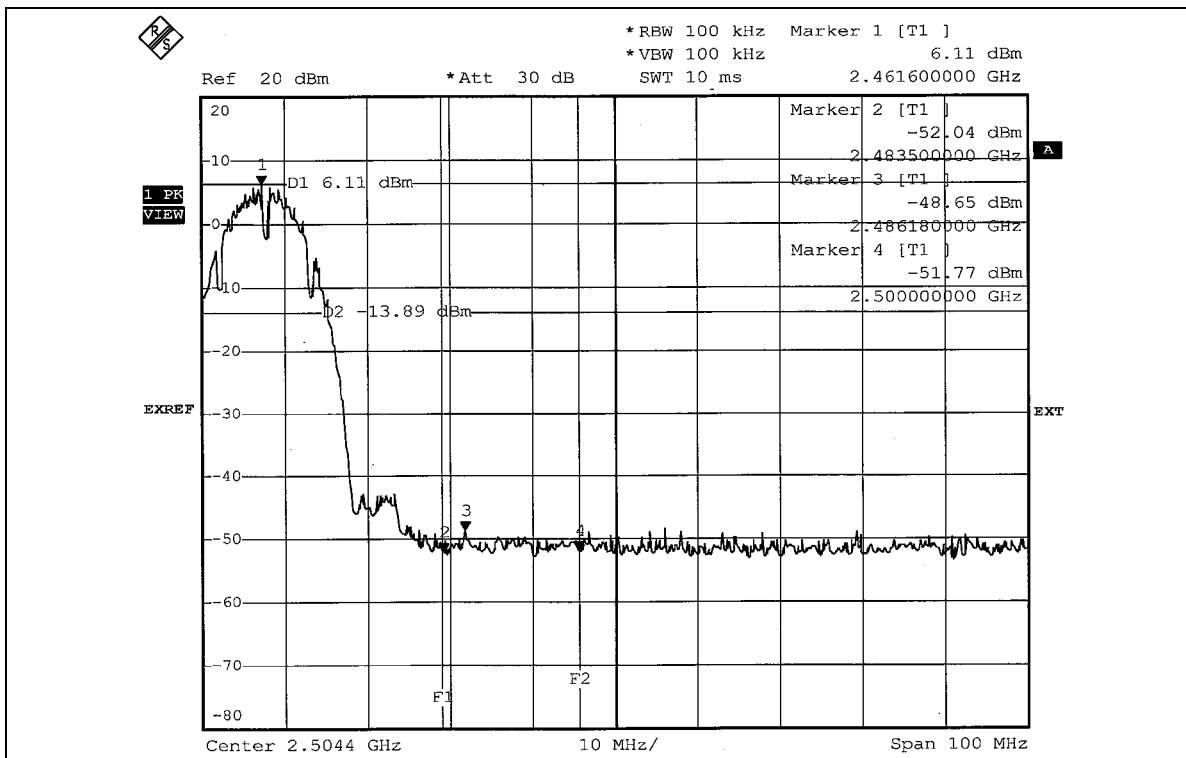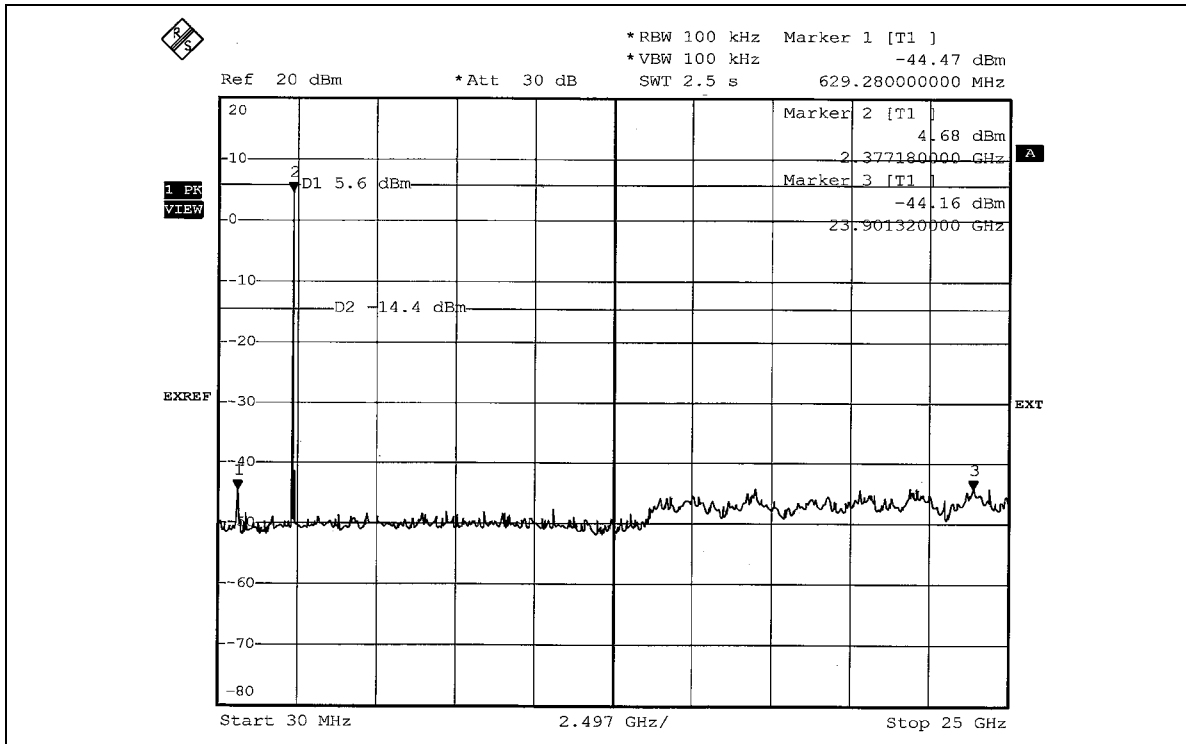

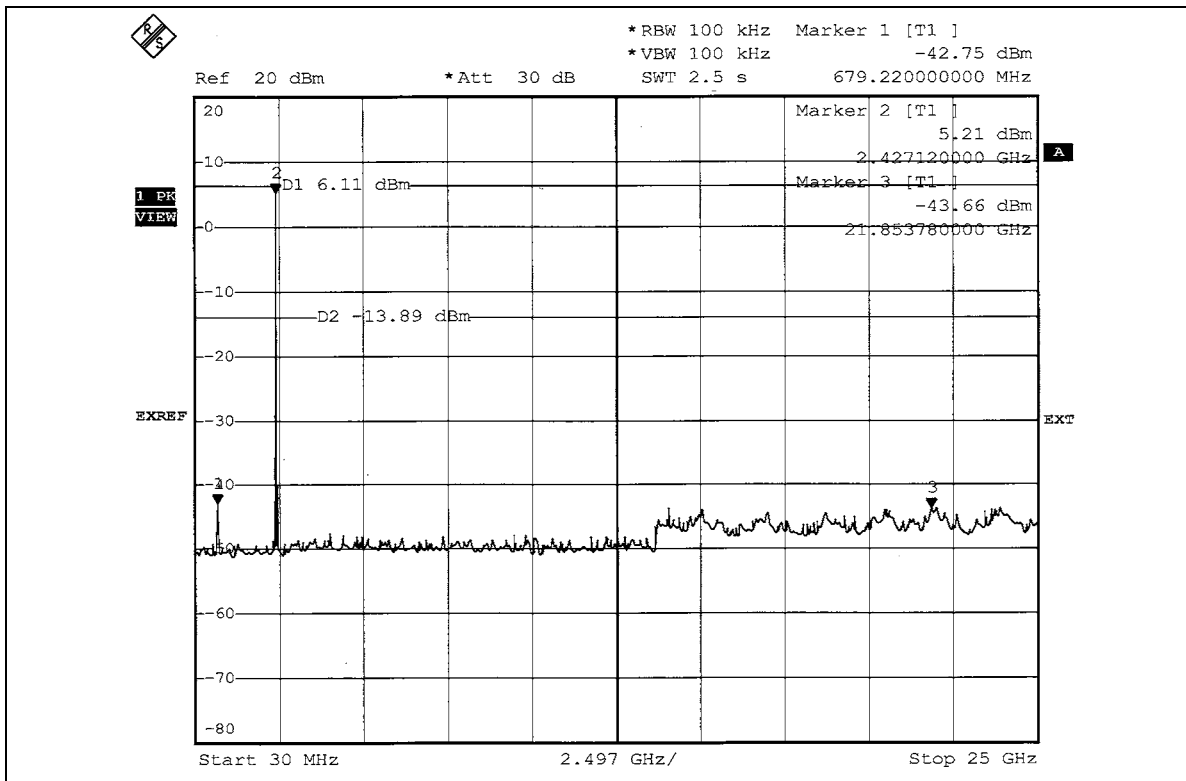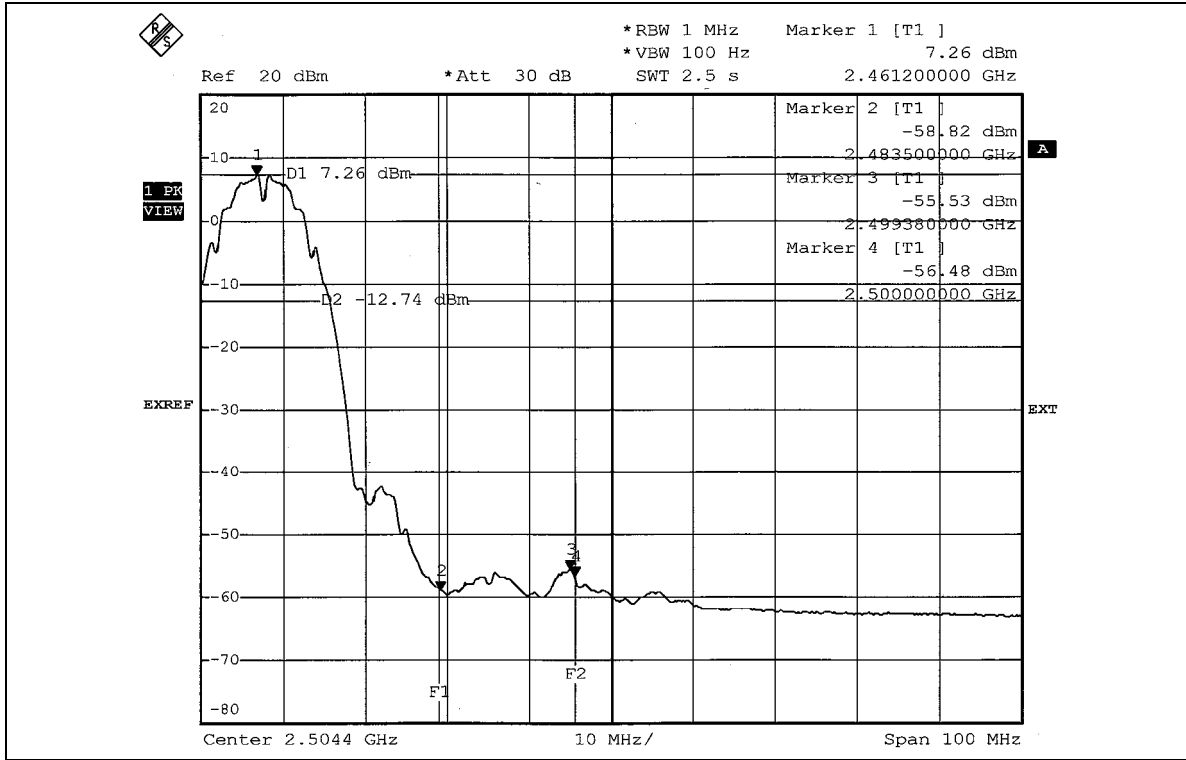





802.11g OFDM modulation



NOTE 1: The band edge emission plot on page 72 shows 40.20dBc between carrier maximum power and local maximum emission in restrict band (2.3896GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 104.96dBuV/m (Peak), so the maximum field strength in restrict band is $104.96 - 40.20 = 64.76$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of on page 72 shows 43.40dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 95.94dBuV/m (Average), so the maximum field strength in restrict band is $95.94 - 43.40 = 52.54$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on page 73 shows 42.92dBc between carrier maximum power and local maximum emission in restrict band (2.4841GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 104.89dBuV/m (Peak), so the maximum field strength in restrict band is $104.89 - 42.92 = 61.97$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on page 74 shows 45.57dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 95.79dBuV/m (Average), so the maximum field strength in restrict band is $95.79 - 45.57 = 50.22$ dBuV/m which is under 54dBuV/m limit.

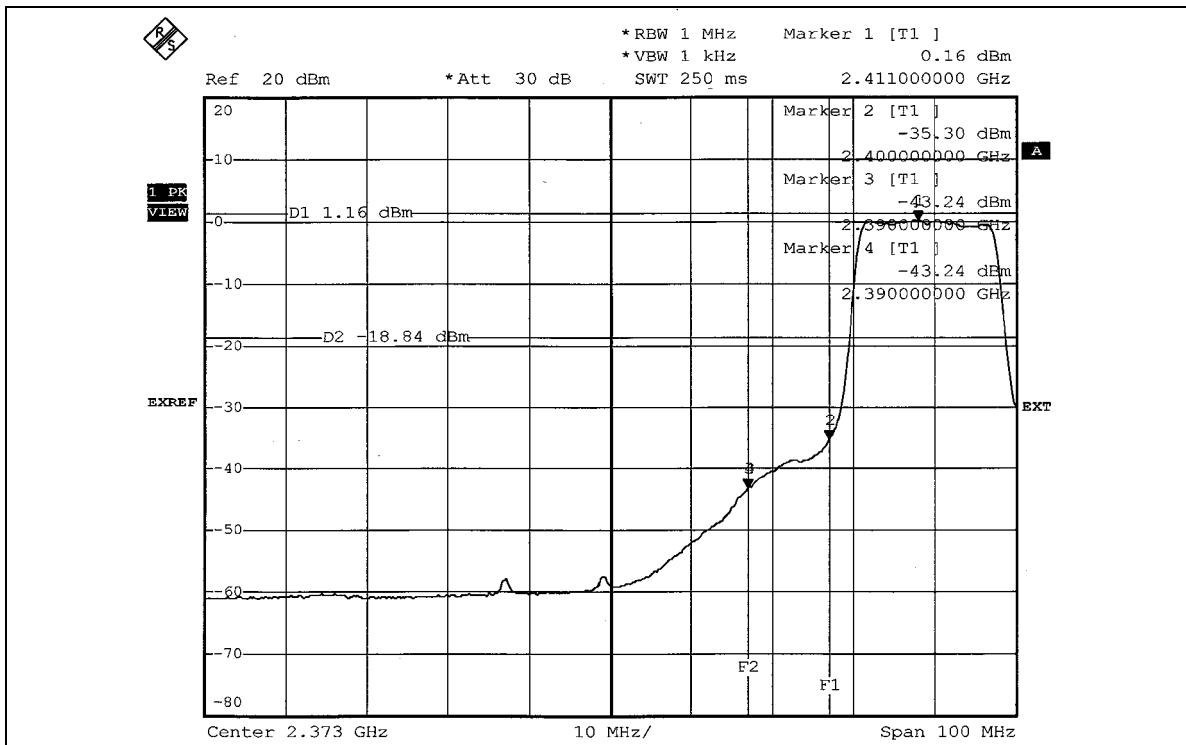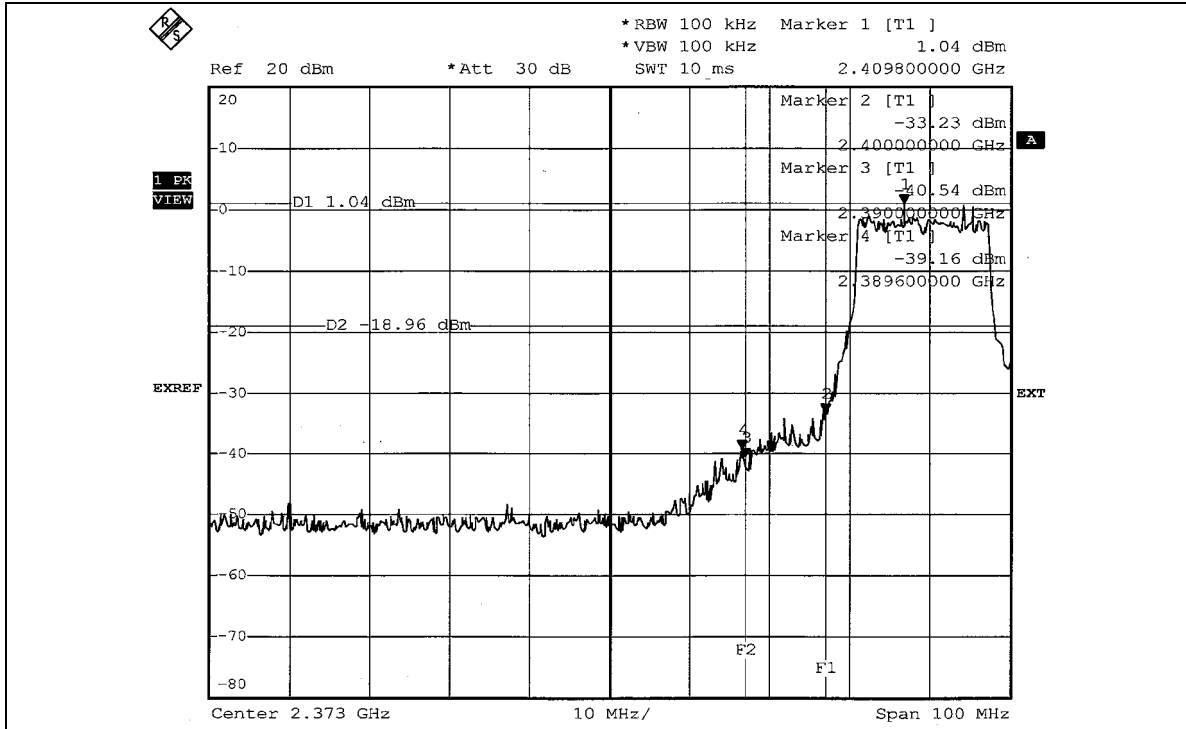

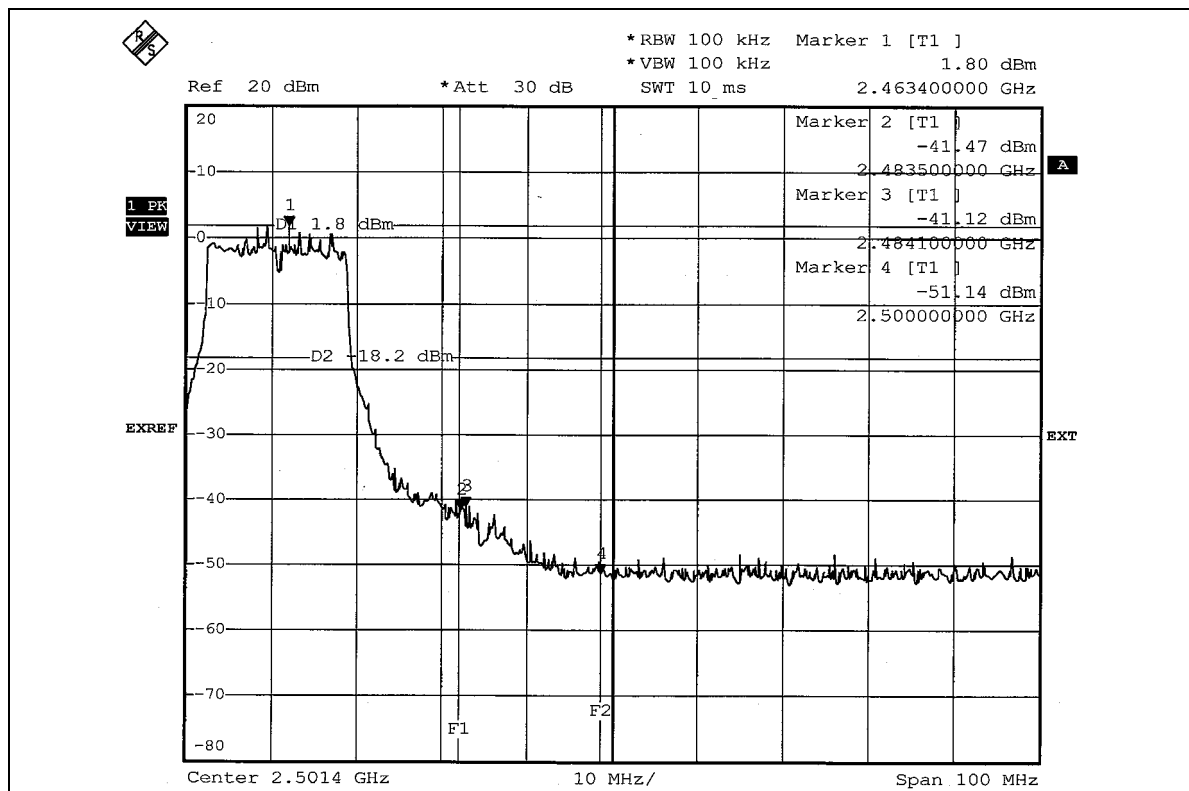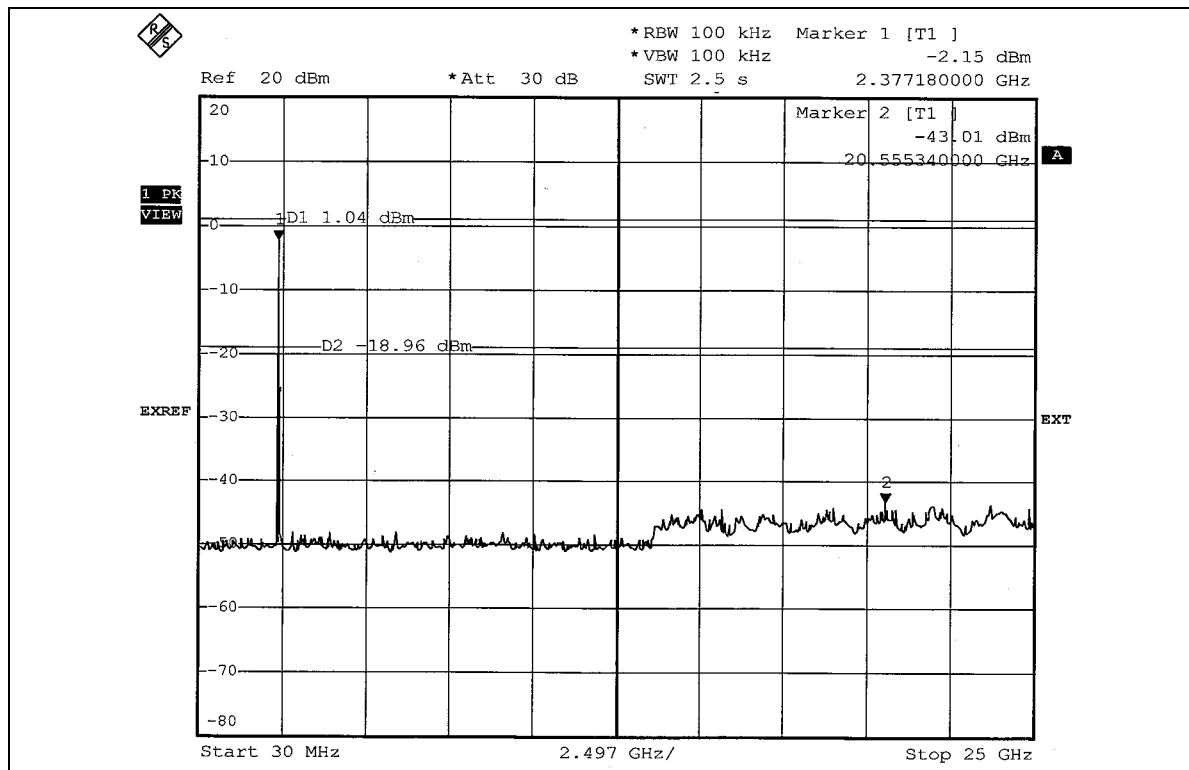

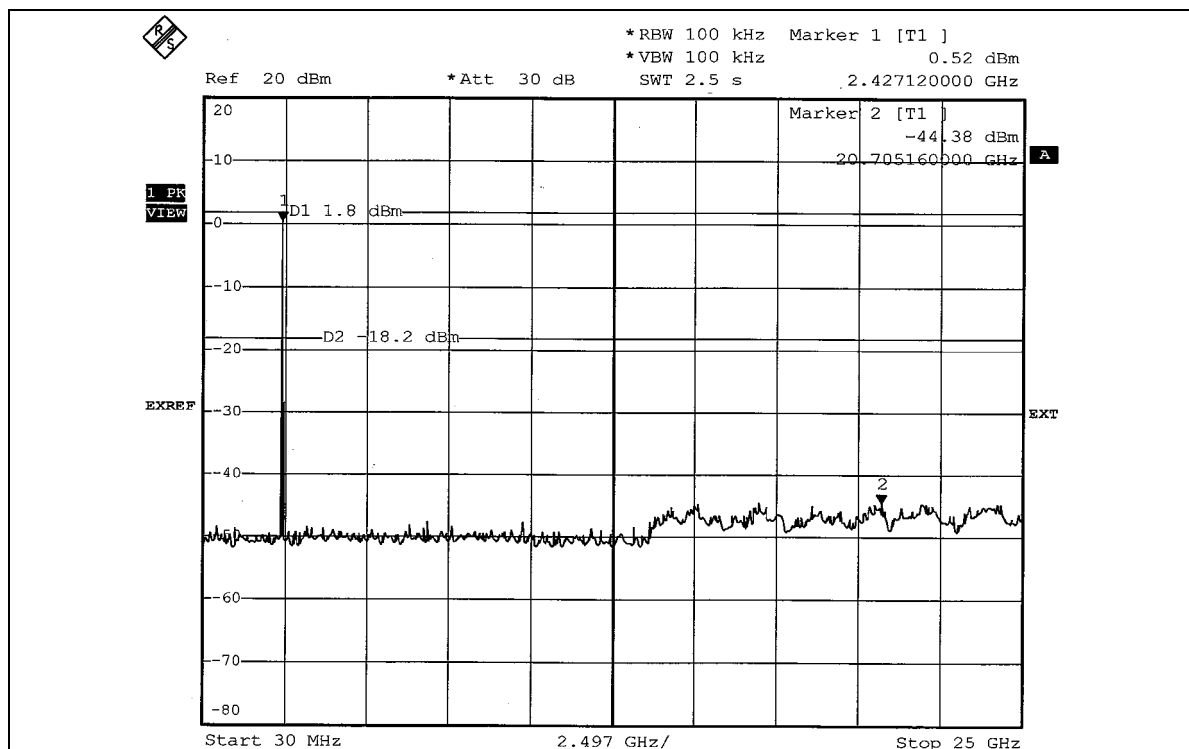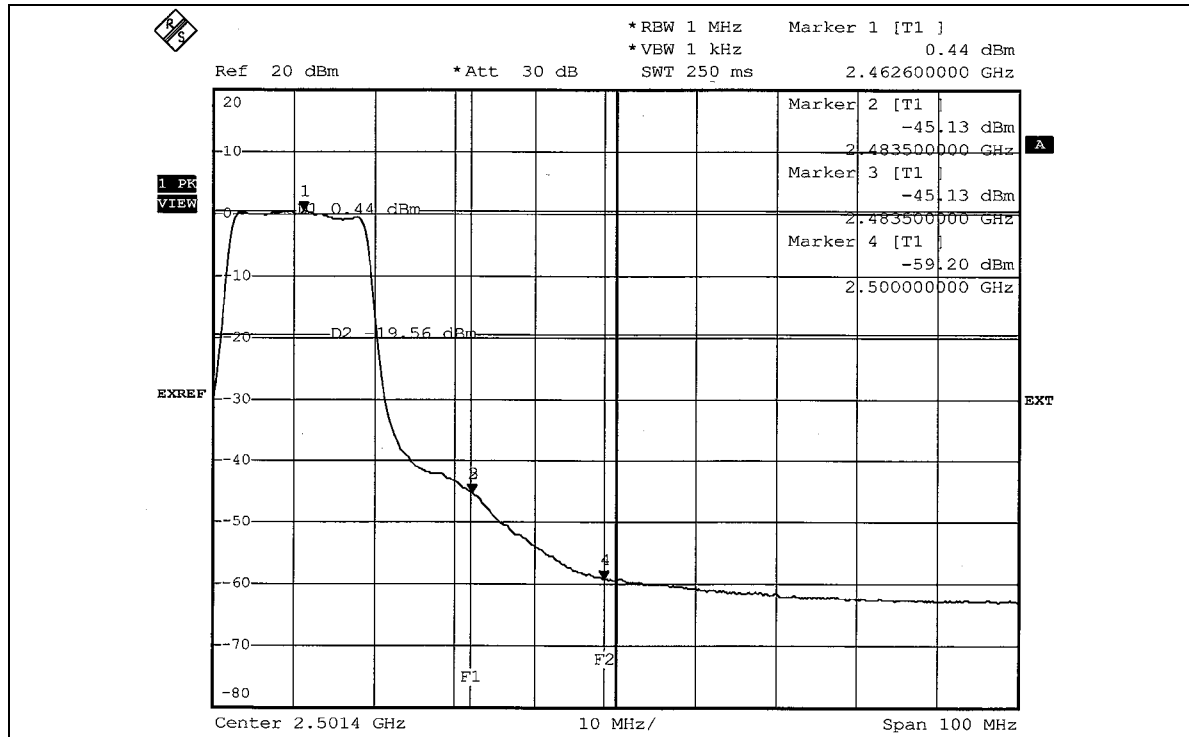



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is PIFA antenna with UFL connector. The maximum Gain of the antenna is 0.67dBi.



5. TEST TYPES AND RESULTS (FOR 802.11a 5745~5825MHz Band)

5.1 CONDUCTED EMISSION MEASUREMENT

5.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
- The lower limit shall apply at the transition frequencies.
 - The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 - All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

5.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Nov. 02, 2006
RF signal cable Woken	5D-FB	Cable-HyC02-01	Jan. 09, 2006
V-LISN SCHWARZBECK	NNBL 8226-2	8226-142	May. 02, 2006
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Jan. 20, 2006
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
- The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 - The test was performed in HwaYa Shielded Room 3.
 - The VCCI Site Registration No. is C-2047.




5.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit – 20dB) was not recorded.

5.1.4 DEVIATION FROM TEST STANDARD

No deviation

5.1.5 TEST SETUP

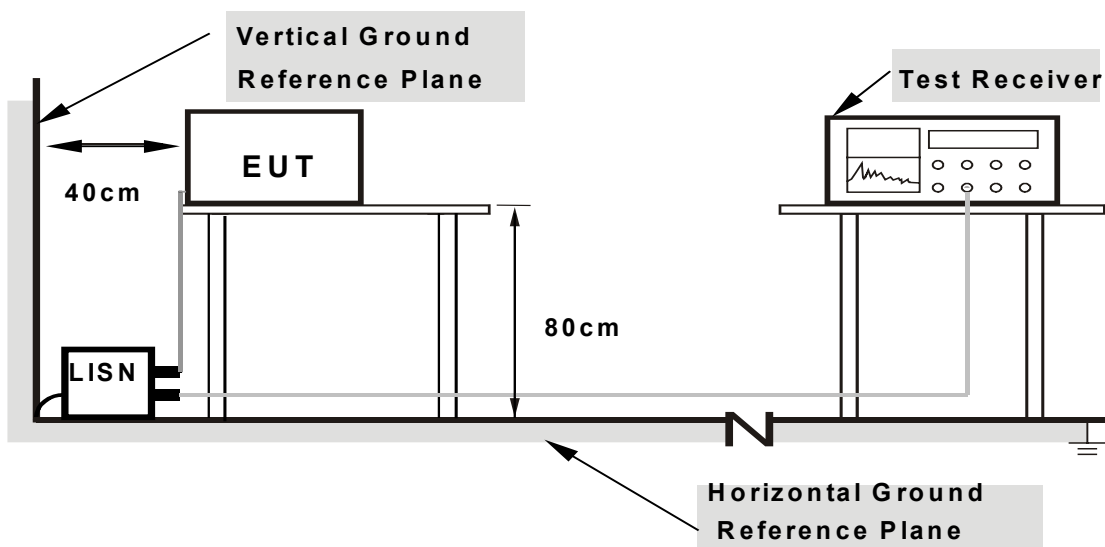

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.1.6 EUT OPERATING CONDITIONS

Same as 4.1.6




5.1.7 TEST RESULTS

Conducted Worst-Case Data (For Adapter: 0335A1965)

EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	PHASE	Line 1
CHANNEL	Channel 5	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A	TESTED BY	Long Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.11	50.27	-	50.38	-	66.00	56.00	-15.62	-
2	0.220	0.11	40.45	-	40.56	-	62.81	52.81	-22.25	-
3	0.731	0.18	28.52	-	28.70	-	56.00	46.00	-27.30	-
4	3.871	0.29	33.13	-	33.42	-	56.00	46.00	-22.58	-
5	17.348	0.75	24.09	-	24.84	-	60.00	50.00	-35.16	-
6	23.852	1.23	28.41	-	29.64	-	60.00	50.00	-30.36	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

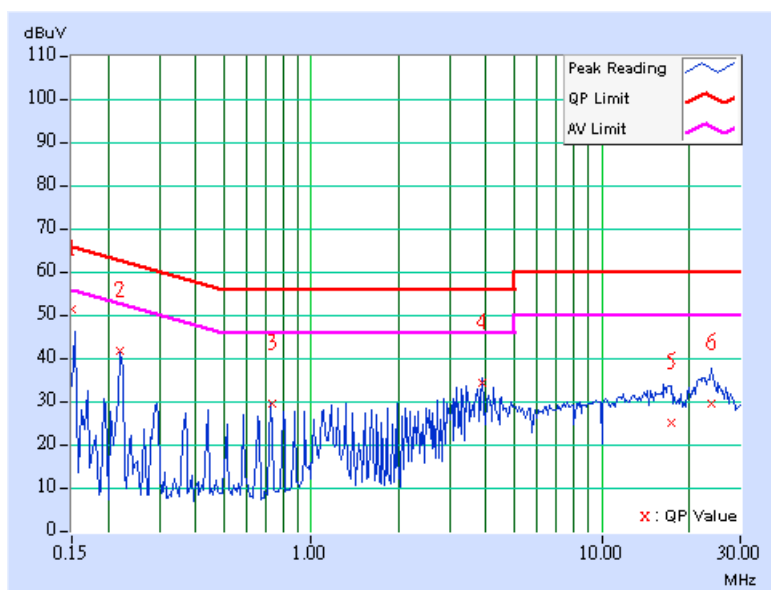




EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	PHASE	Line 2
CHANNEL	Channel 5	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A	TESTED BY	Long Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.11	50.40	-	50.51	-	66.00	56.00	-15.49	-
2	0.216	0.11	39.14	-	39.25	-	62.96	52.96	-23.70	-
3	0.732	0.18	28.21	-	28.39	-	56.00	46.00	-27.61	-
4	4.020	0.29	35.97	-	36.26	-	56.00	46.00	-19.74	-
5	18.719	0.90	28.41	-	29.31	-	60.00	50.00	-30.69	-
6	23.914	1.16	29.90	-	31.06	-	60.00	50.00	-28.94	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

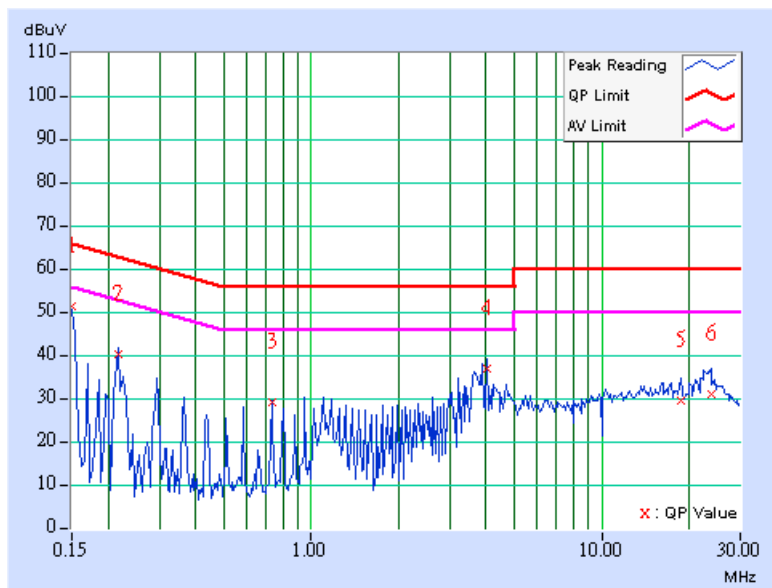




Conducted Worst-Case Data (For Adapter: PA-1650-02)

EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	PHASE	Line 1
CHANNEL	Channel 5	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	B	TESTED BY	Long Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.11	41.20	-	41.31	-	66.00	56.00	-24.69	-
2	0.216	0.11	40.19	-	40.30	-	62.96	52.96	-22.65	-
3	1.574	0.24	32.36	-	32.60	-	56.00	46.00	-23.40	-
4	3.930	0.29	35.53	-	35.82	-	56.00	46.00	-20.18	-
5	9.867	0.44	27.95	-	28.39	-	60.00	50.00	-31.61	-
6	17.297	0.75	27.78	-	28.53	-	60.00	50.00	-31.47	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

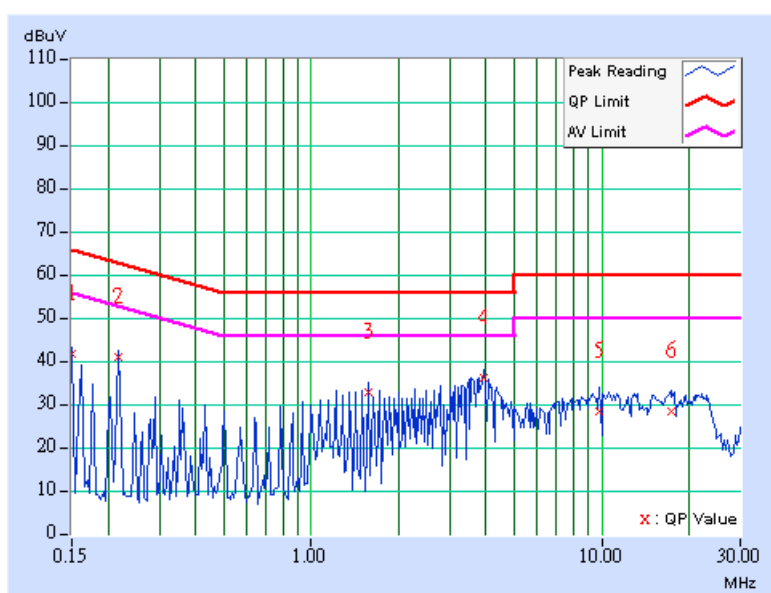




EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	PHASE	Line 2
CHANNEL	Channel 5	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	26deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	B	TESTED BY	Long Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.11	41.43	-	41.54	-	66.00	56.00	-24.46	-
2	0.216	0.11	40.17	-	40.28	-	62.96	52.96	-22.67	-
3	1.789	0.25	32.52	-	32.77	-	56.00	46.00	-23.23	-
4	3.715	0.28	35.91	-	36.19	-	56.00	46.00	-19.81	-
5	7.793	0.45	29.80	-	30.25	-	60.00	50.00	-29.75	-
6	15.227	0.66	27.38	-	28.04	-	60.00	50.00	-31.96	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

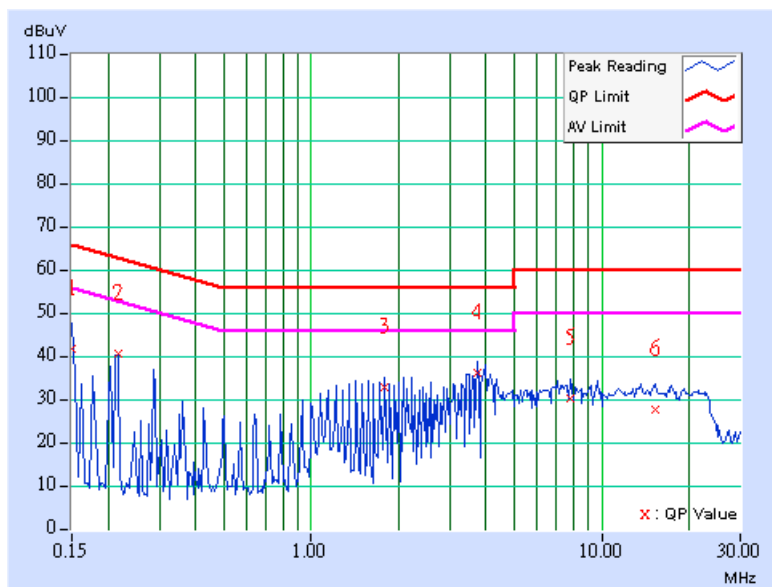



5.2 RADIATED EMISSION MEASUREMENT

5.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



5.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	100033	May. 19, 2006
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100025	Dec. 05, 2006
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Jun. 01, 2006
HORN Antenna SCHWARZBECK	9120D	9120D-408	Jan. 17, 2006
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Jan. 23, 2006
Preamplifier Agilent	8447D	2944A10633	Nov. 04, 2006
Preamplifier Agilent	8449B	3008A01964	Oct. 30, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218183/4	Jan. 26, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218195/4	Jan. 26, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA
Turn Table ADT.	TT100.	TT93021703	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA
26GHz ~ 40GHz Amplifier	AMF-6F-2600400	923362	Mar. 13, 2006

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 2.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The VCCI Site Registration No. is R-237.
 5. The IC Site Registration No. is IC4924-3.



5.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz for Average detection (AV) at frequency above 1GHz.

5.2.4 DEVIATION FROM TEST STANDARD

No deviation

5.2.5 TEST SETUP

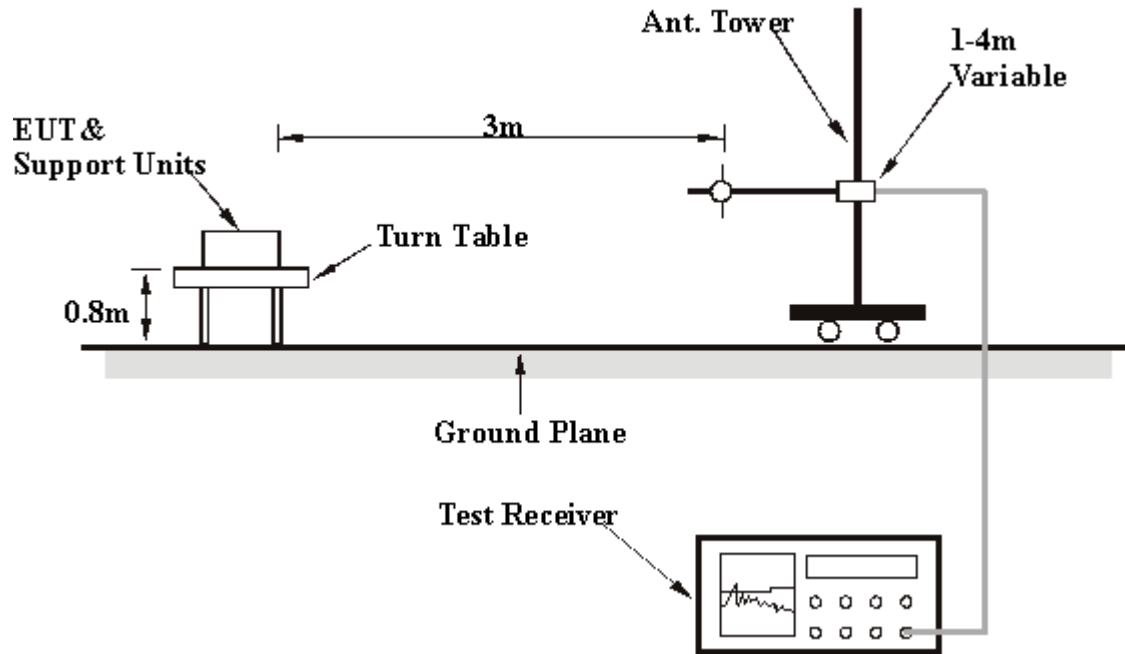

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

5.2.7 TEST RESULTS

Below 1GHz Worst-Case Data (For Adapter: 0335A1965)

EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 5	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 62%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	47.49	33.89 QP	40.00	-6.11	1.25 H	136	19.22	14.68
2	74.71	30.63 QP	40.00	-9.37	1.25 H	106	19.14	11.48
3	96.09	30.41 QP	43.50	-13.09	1.50 H	34	21.04	9.37
4	154.41	31.76 QP	43.50	-11.74	1.00 H	355	18.10	13.66
5	166.07	34.79 QP	43.50	-8.71	2.00 H	247	21.48	13.31
6	226.33	32.96 QP	46.00	-13.04	1.25 H	148	20.99	11.96
7	241.88	32.36 QP	46.00	-13.64	1.25 H	133	19.96	12.39
8	589.84	34.78 QP	46.00	-11.22	1.75 H	148	12.23	22.55
9	638.44	33.60 QP	46.00	-12.40	1.25 H	133	10.45	23.16

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	47.49	32.64 QP	40.00	-7.36	1.00 V	73	17.96	14.68
2	72.77	31.82 QP	40.00	-8.18	1.25 V	175	19.96	11.86
3	96.09	33.86 QP	43.50	-9.64	1.00 V	295	24.49	9.37
4	158.30	36.10 QP	43.50	-7.40	1.75 V	265	22.34	13.76
5	162.18	34.69 QP	43.50	-8.81	1.50 V	295	21.06	13.63
6	490.70	34.72 QP	46.00	-11.28	1.00 V	292	14.67	20.05
7	589.84	37.19 QP	46.00	-8.81	1.25 V	292	14.64	22.55
8	615.11	33.93 QP	46.00	-12.07	1.00 V	193	10.92	23.01
9	638.44	34.09 QP	46.00	-11.91	2.00 V	100	10.93	23.16

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value



Below 1GHz Worst-Case Data (For Adapter: PA-1650-02)

EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 5	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 62%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	47.49	31.88 QP	40.00	-8.12	1.25 H	238	17.20	14.68
2	70.82	30.00 QP	40.00	-10.00	1.00 H	262	17.76	12.24
3	111.64	32.31 QP	43.50	-11.19	1.25 H	244	21.89	10.42
4	142.75	38.42 QP	43.50	-5.08	1.25 H	247	25.07	13.35
5	162.18	34.99 QP	43.50	-8.51	1.00 H	334	21.36	13.63
6	226.33	33.77 QP	46.00	-12.23	1.00 H	28	21.81	11.96
7	230.22	33.57 QP	46.00	-12.43	1.00 H	19	21.50	12.07
8	286.59	29.84 QP	46.00	-16.16	1.00 H	358	14.68	15.16
9	323.53	35.46 QP	46.00	-10.54	1.25 H	259	19.28	16.18
10	453.77	29.92 QP	46.00	-16.08	1.00 H	256	10.79	19.13
11	589.84	29.03 QP	46.00	-16.97	1.00 H	28	6.48	22.55
12	615.11	28.13 QP	46.00	-17.87	1.00 H	268	5.12	23.01
13	906.69	42.97 QP	46.00	-3.03	1.25 H	259	15.73	27.24
14	908.64	42.59 QP	46.00	-3.41	1.00 H	334	15.32	27.27

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	59.16	37.80 QP	40.00	-2.20	1.00 V	196	24.16	13.64
2	63.05	35.24 QP	40.00	-4.76	1.00 V	22	22.03	13.21
3	96.09	34.06 QP	43.50	-9.44	1.00 V	22	24.69	9.37
4	144.69	31.09 QP	43.50	-12.41	1.00 V	52	17.69	13.40
5	162.18	29.29 QP	43.50	-14.21	1.00 V	22	15.67	13.63
6	323.53	32.38 QP	46.00	-13.62	1.00 V	196	16.20	16.18
7	453.77	30.55 QP	46.00	-15.45	1.25 V	205	11.42	19.13
8	589.84	30.08 QP	46.00	-15.92	1.00 V	319	7.53	22.55

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value



802.11a OFDM modulation

EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 62%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#1555.00	47.32 PK	74.00	-26.68	1.05 H	231	18.33	28.99
1	#1555.00	42.85 AV	54.00	-11.15	1.05 H	231	13.86	28.99
2	5725.00	70.97 PK	77.13	-6.16	1.36 H	71	31.31	39.66
2	5725.00	56.73 AV	68.89	-12.16	1.36 H	71	17.07	39.66
3	*5745.00	97.13 PK			1.36 H	71	57.38	39.75
3	*5745.00	88.89 AV			1.36 H	71	49.14	39.75
4	#11490.00	54.23 PK	74.00	-19.77	1.25 H	336	3.95	50.28
4	#11490.00	40.94 AV	54.00	-13.06	1.25 H	336	-9.34	50.28

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#1555.00	52.61 PK	74.00	-21.39	1.01 V	179	23.63	28.99
1	#1555.00	49.78 AV	54.00	-4.22	1.01 V	179	20.80	28.99
2	5725.00	78.61 PK	85.22	-6.61	1.09 V	128	38.95	39.66
2	5725.00	63.79 AV	75.95	-12.16	1.09 V	128	24.13	39.66
3	*5745.00	105.22 PK			1.09 V	128	65.47	39.75
3	*5745.00	95.95 AV			1.09 V	128	56.20	39.75
4	#11490.00	57.66 PK	74.00	-16.34	1.40 V	233	7.38	50.28
4	#11490.00	43.71 AV	54.00	-10.29	1.40 V	233	-6.57	50.28

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#"The radiated frequency falling in the restricted band.
 7. The limit value is defined as per 15.247



EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 3	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 62%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#1555.00	47.46 PK	74.00	-26.54	1.02 H	257	18.47	28.99
1	#1555.00	42.97 AV	54.00	-11.03	1.02 H	257	13.98	28.99
2	*5785.00	97.01 PK			1.35 H	74	57.08	39.93
2	*5785.00	88.76 AV			1.35 H	74	48.83	39.93
3	#11570.00	54.06 PK	74.00	-19.94	1.12 H	296	3.25	50.81
3	#11570.00	40.71 AV	54.00	-13.29	1.12 H	296	-10.10	50.81

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#1555.00	52.53 PK	74.00	-21.47	1.03 V	180	23.54	28.99
1	#1555.00	49.68 AV	54.00	-4.32	1.03 V	180	20.69	28.99
2	*5785.00	105.58 PK			1.07 V	131	65.65	39.93
2	*5785.00	96.36 AV			1.07 V	131	56.43	39.93
3	#11570.00	57.82 PK	74.00	-16.18	1.34 V	212	7.01	50.81
3	#11570.00	43.86 AV	54.00	-10.14	1.34 V	212	-6.95	50.81

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#"The radiated frequency falling in the restricted band.
 7. The limit value is defined as per 15.247



EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 5	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 62%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#1555.00	47.51 PK	74.00	-26.49	1.01 H	68	18.52	28.99
1	#1555.00	43.02 AV	54.00	-10.98	1.01 H	68	14.03	28.99
2	*5825.00	97.23 PK			1.34 H	75	57.23	40.00
2	*5825.00	88.95 AV			1.34 H	75	48.95	40.00
3	5850.00	64.79 PK	77.23	-12.44	1.34 H	75	24.80	39.99
3	5850.00	54.06 AV	68.95	-14.89	1.34 H	75	14.07	39.99
4	#11650.00	53.92 PK	74.00	-20.08	1.21 H	47	3.33	50.59
4	#11650.00	40.61 AV	54.00	-13.39	1.21 H	47	-9.98	50.59

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#1555.00	52.73 PK	74.00	-21.27	1.11 V	103	23.74	28.99
1	#1555.00	49.86 AV	54.00	-4.14	1.11 V	103	20.87	28.99
2	*5825.00	105.93 PK			1.06 V	130	65.93	40.00
2	*5825.00	96.72 AV			1.06 V	130	56.72	40.00
3	5850.00	74.95 PK	85.93	-10.98	1.06 V	130	34.96	39.99
3	5850.00	61.52 AV	76.72	-15.20	1.06 V	130	21.53	39.99
4	#11650.00	57.92 PK	74.00	-16.08	1.07 V	134	7.33	50.59
4	#11650.00	44.06 AV	54.00	-9.94	1.07 V	134	-6.53	50.59

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#"The radiated frequency falling in the restricted band.
 7. The limit value is defined as per 15.247



5.3 6dB BANDWIDTH MEASUREMENT

5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

5.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTES: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


5.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

5.3.4 DEVIATION FROM TEST STANDARD

No deviation

5.3.5 TEST SETUP

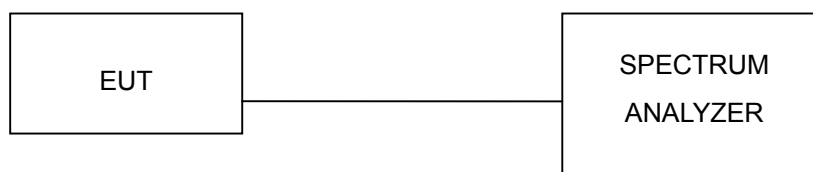

5.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



5.3.7 TEST RESULTS


802.11a OFDM modulation

EUT	Mini PC	MODEL	P60
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 54%RH, 991hPa
TESTED BY	Long Chen		


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	5745	16.36	0.5	PASS
3	5785	16.36	0.5	PASS
5	5825	16.36	0.5	PASS



CH 1

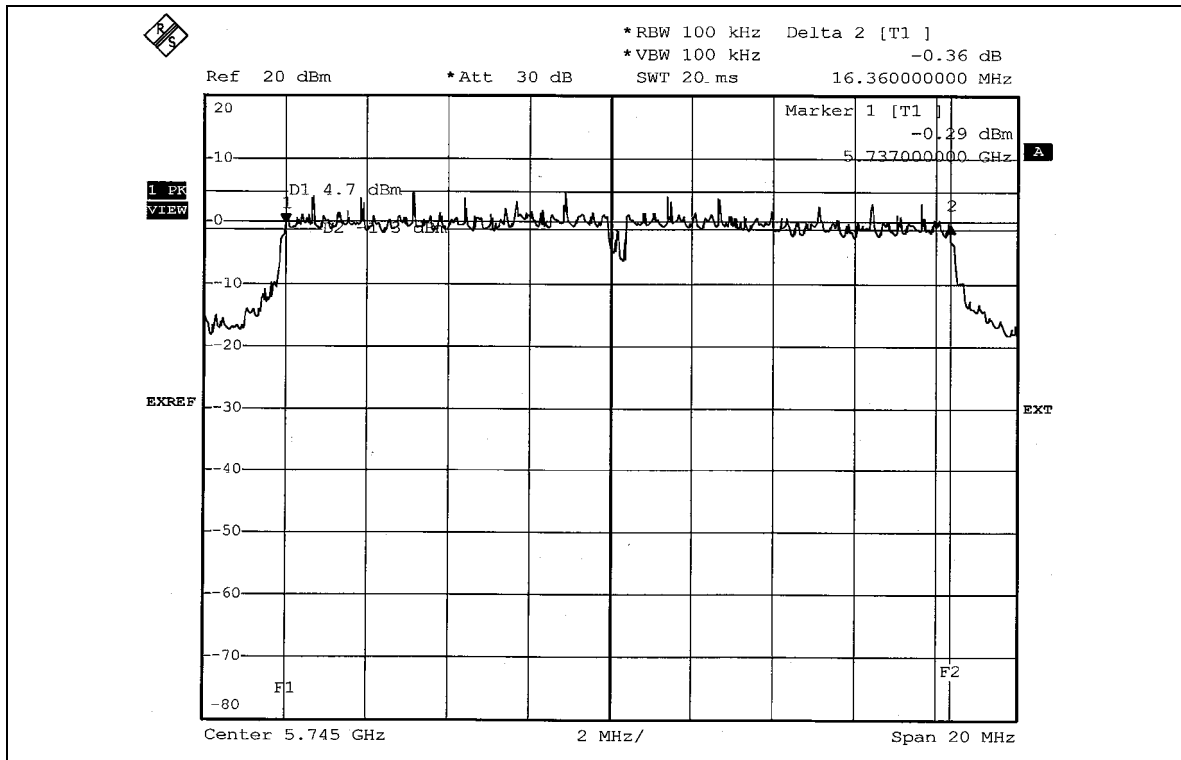


CH 3

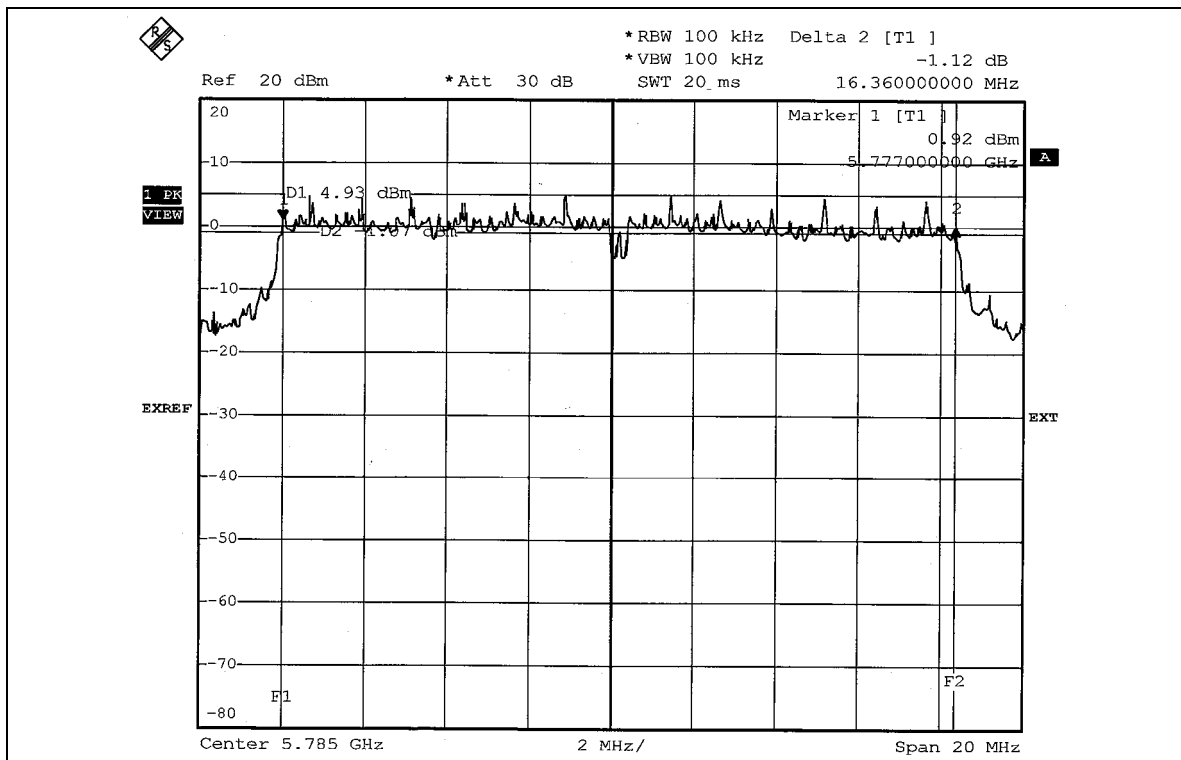



CH 5

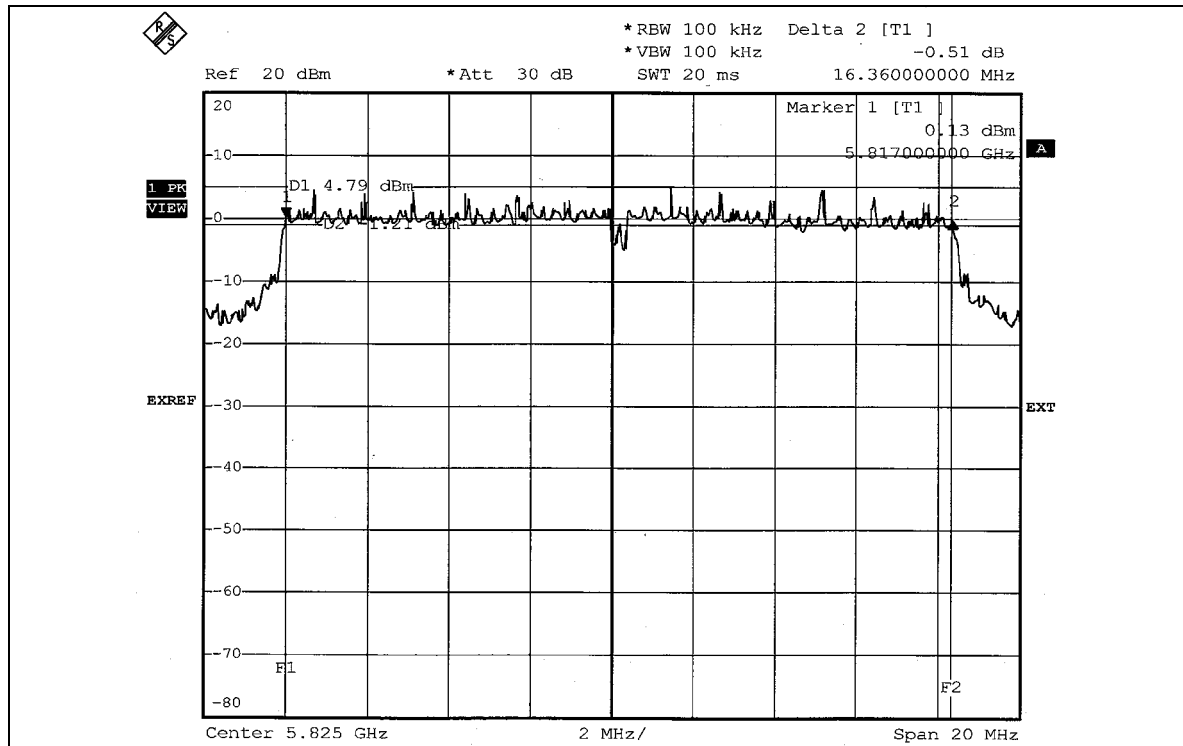



5.4 MAXIMUM PEAK OUTPUT POWER

5.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

5.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 30, 2006
TEKTRONIX OSCILLOSCOPE	TDS 1012	C019167	Feb. 01, 2006
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA..



5.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator . The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

5.4.4 DEVIATION FROM TEST STANDARD

No deviation

5.4.5 TEST SETUP



5.4.6 EUT OPERATING CONDITIONS

Same as Item 5.3.6



5.4.7 TEST RESULTS

802.11a OFDM modulation

EUT	Mini PC	MODEL	P60
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 54%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	5745	64.121	18.07	30	PASS
3	5785	63.241	18.01	30	PASS
5	5825	64.417	18.09	30	PASS



5.5 POWER SPECTRAL DENSITY MEASUREMENT

5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

5.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTES:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


5.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time = span/3 kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3 kHz for a full response of the mixer in the spectrum analyzer.

5.5.4 DEVIATION FROM TEST STANDARD

No deviation

5.5.5 TEST SETUP

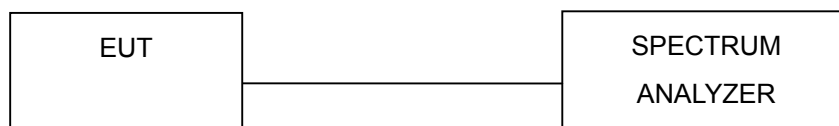

5.5.6 EUT OPERATING CONDITION

Same as Item 5.3.6



5.5.7 TEST RESULTS


802.11a OFDM modulation

EUT	Mini PC	MODEL	P60
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 54%RH, 991hPa
TESTED BY	Long Chen		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	5745	-5.78	8	PASS
3	5785	-5.50	8	PASS
5	5825	-5.66	8	PASS



CH 1

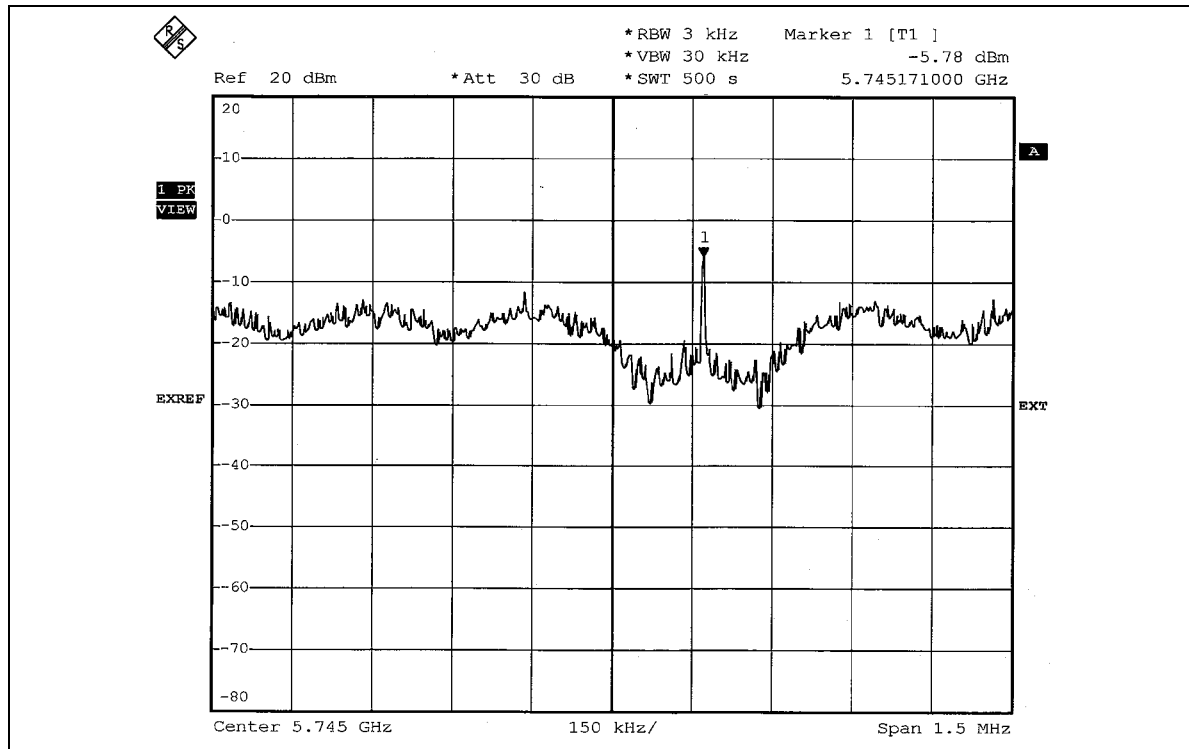


CH 3

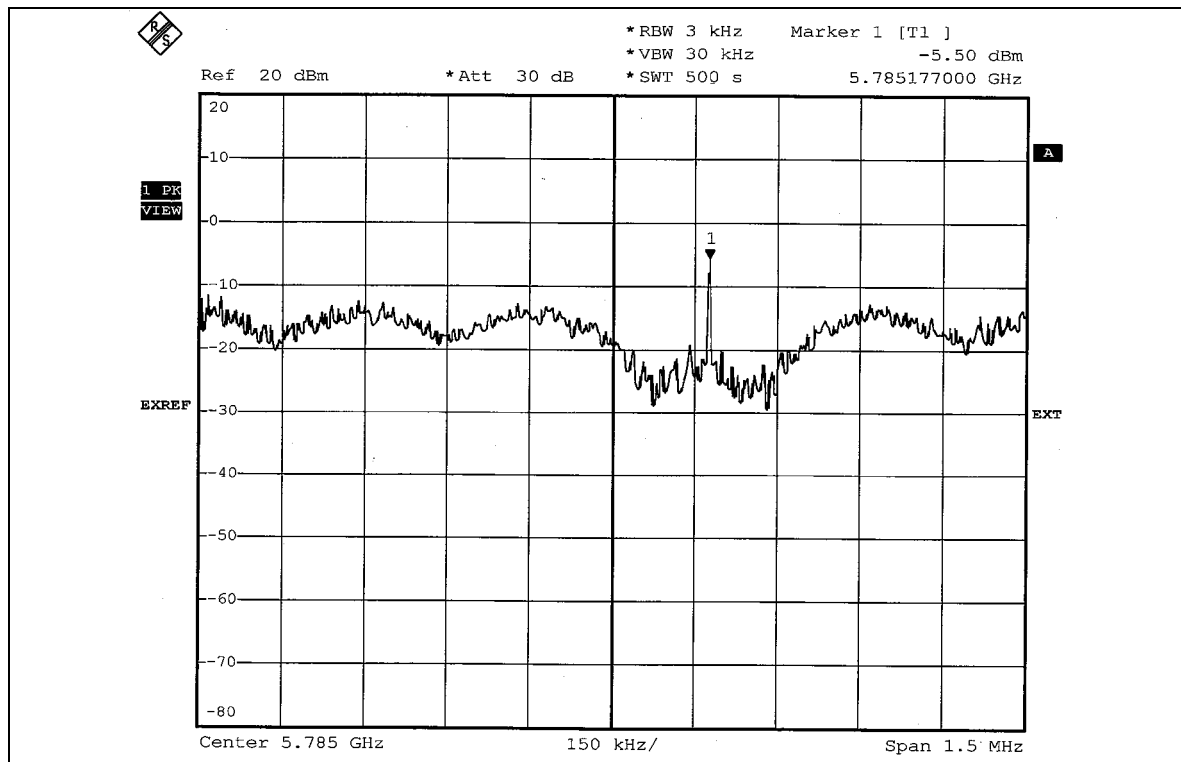



CH 5

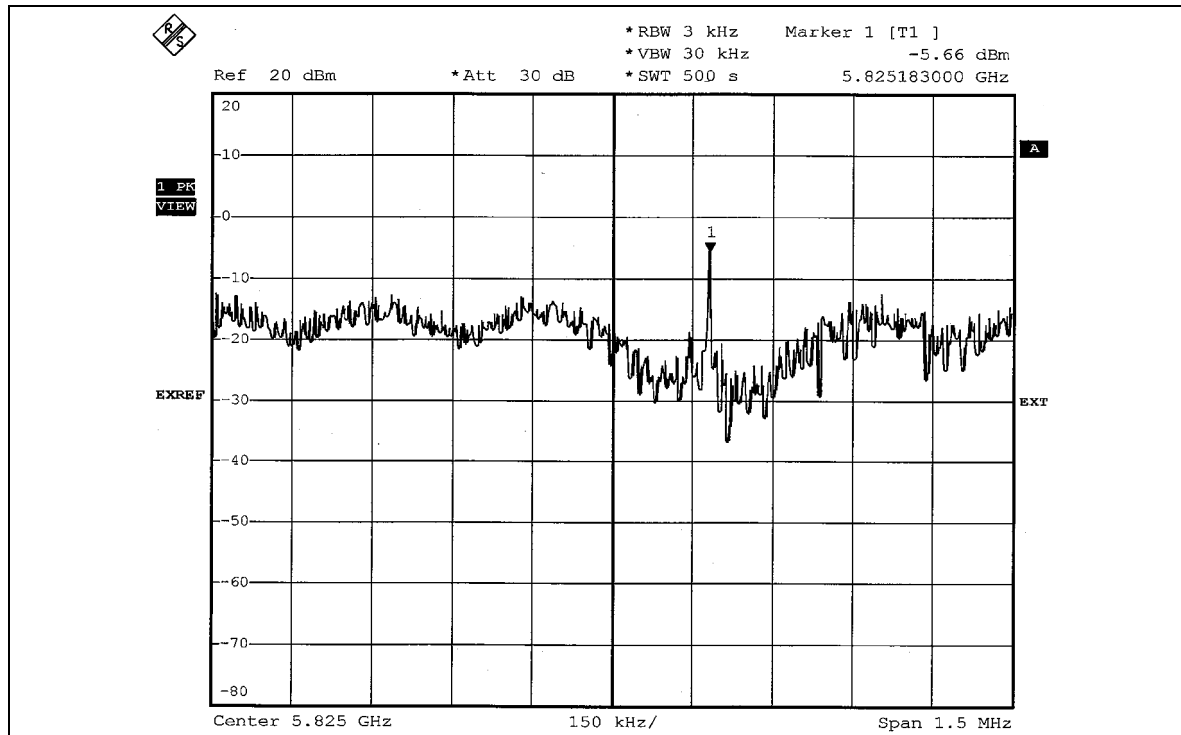



5.6 BAND EDGES MEASUREMENT

5.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

5.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTES:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

5.6.4 DEVIATION FROM TEST STANDARD

No deviation







5.6.5 EUT OPERATING CONDITION



Same as Item 5.9.6

5.6.6 TEST RESULTS

The spectrum plots are attached on the following pages. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

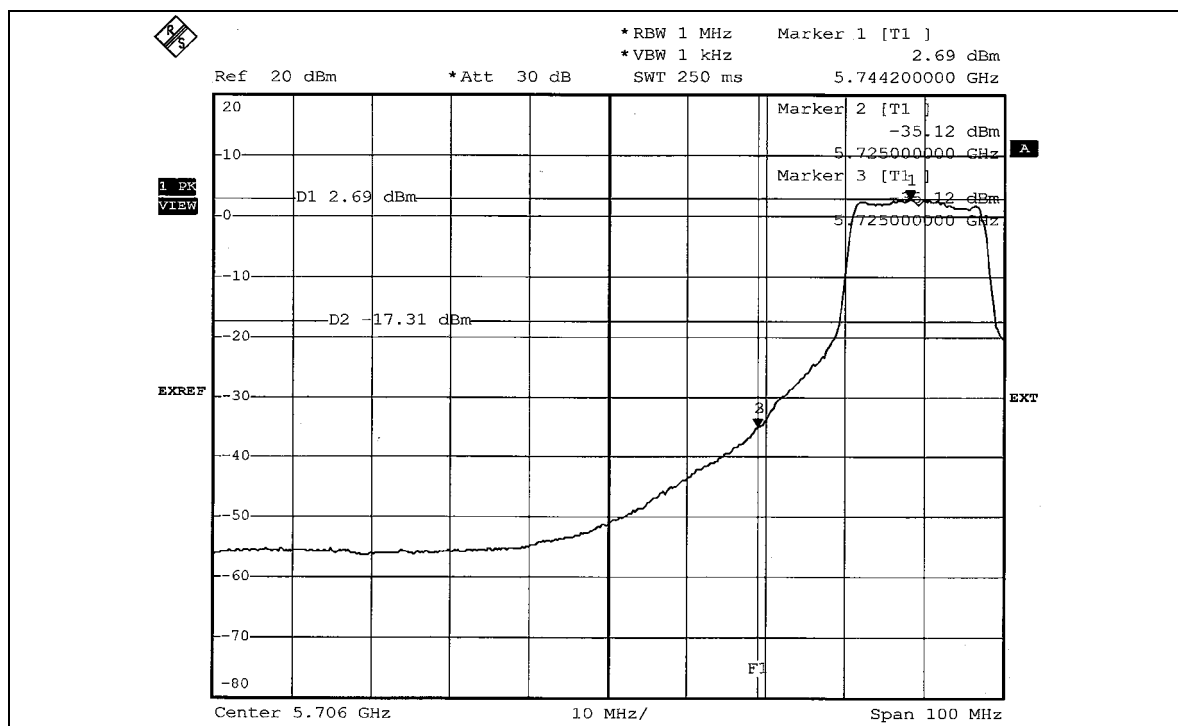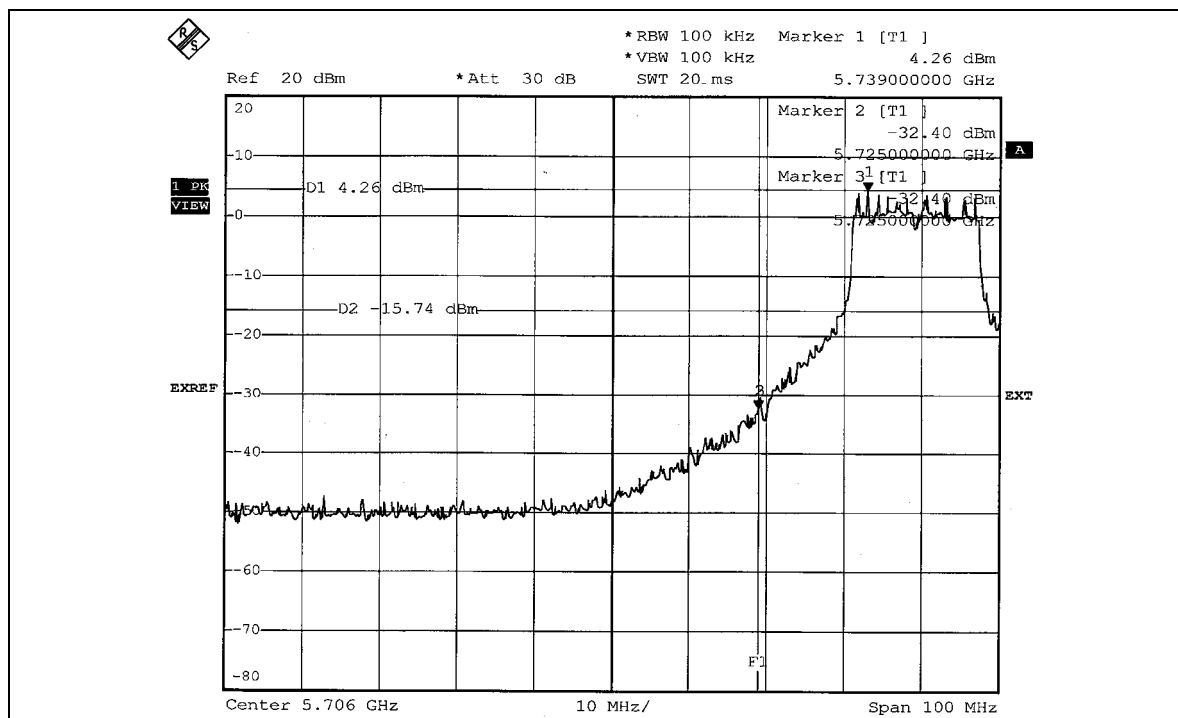

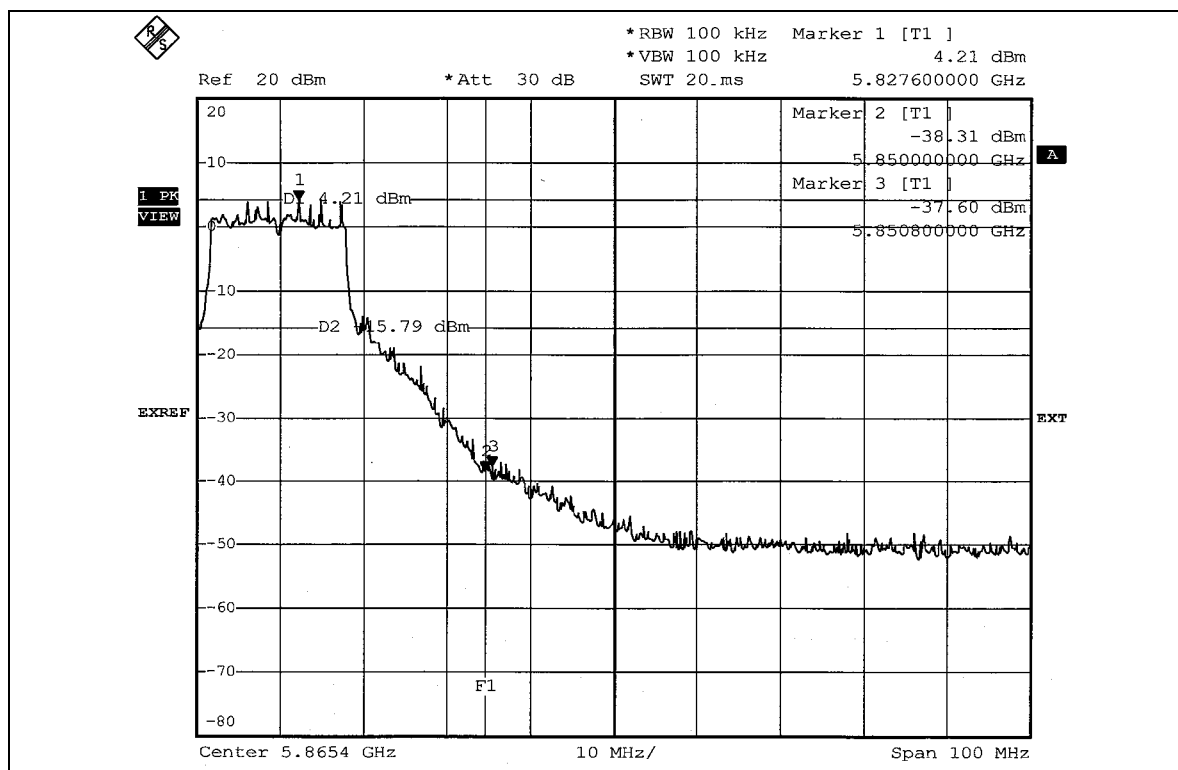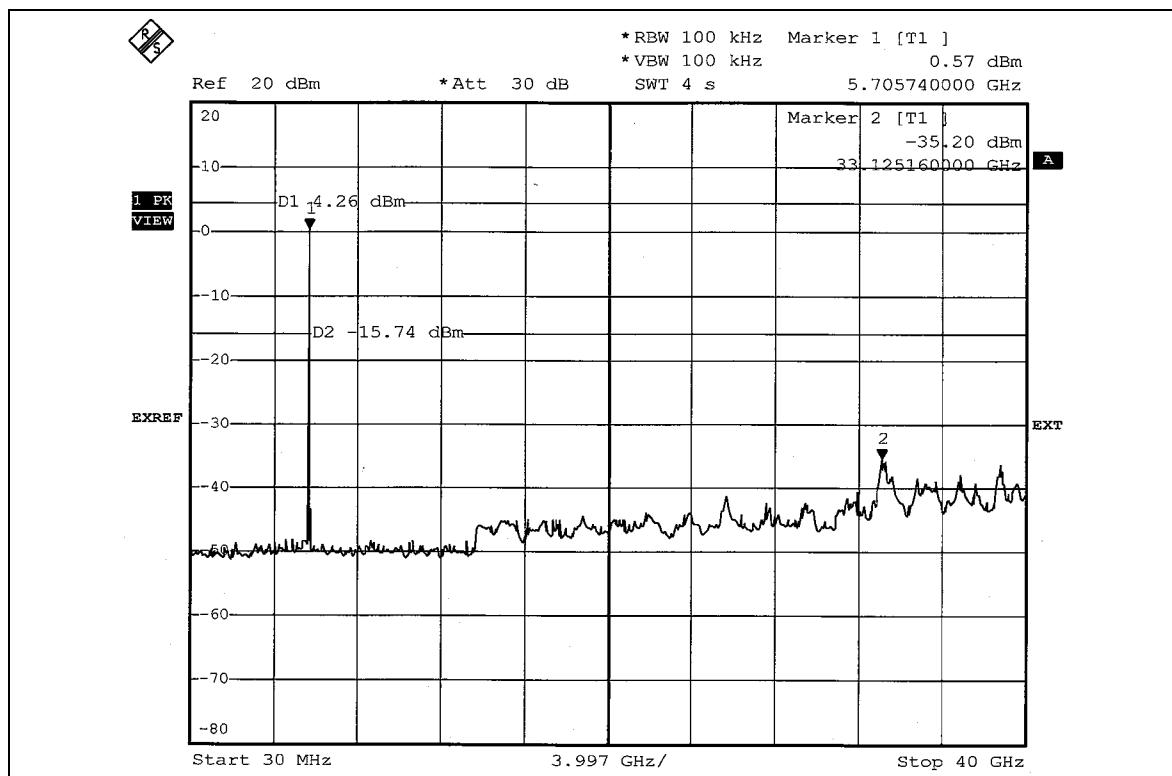

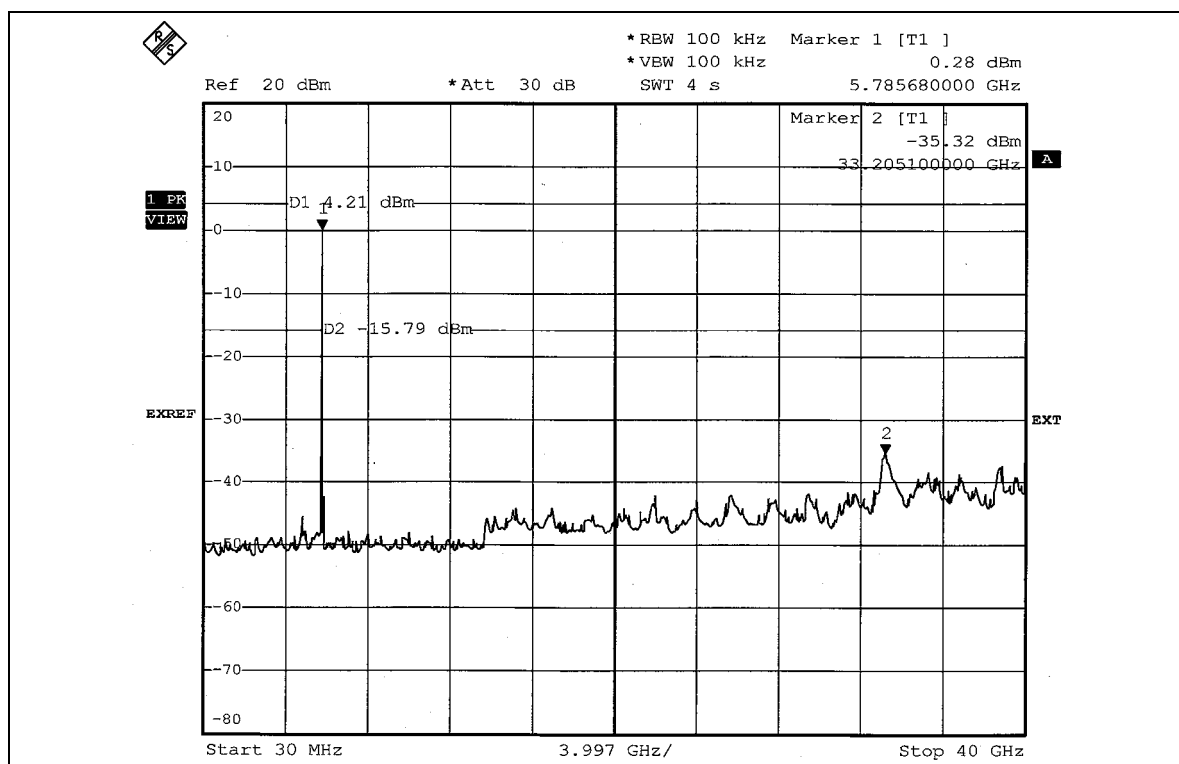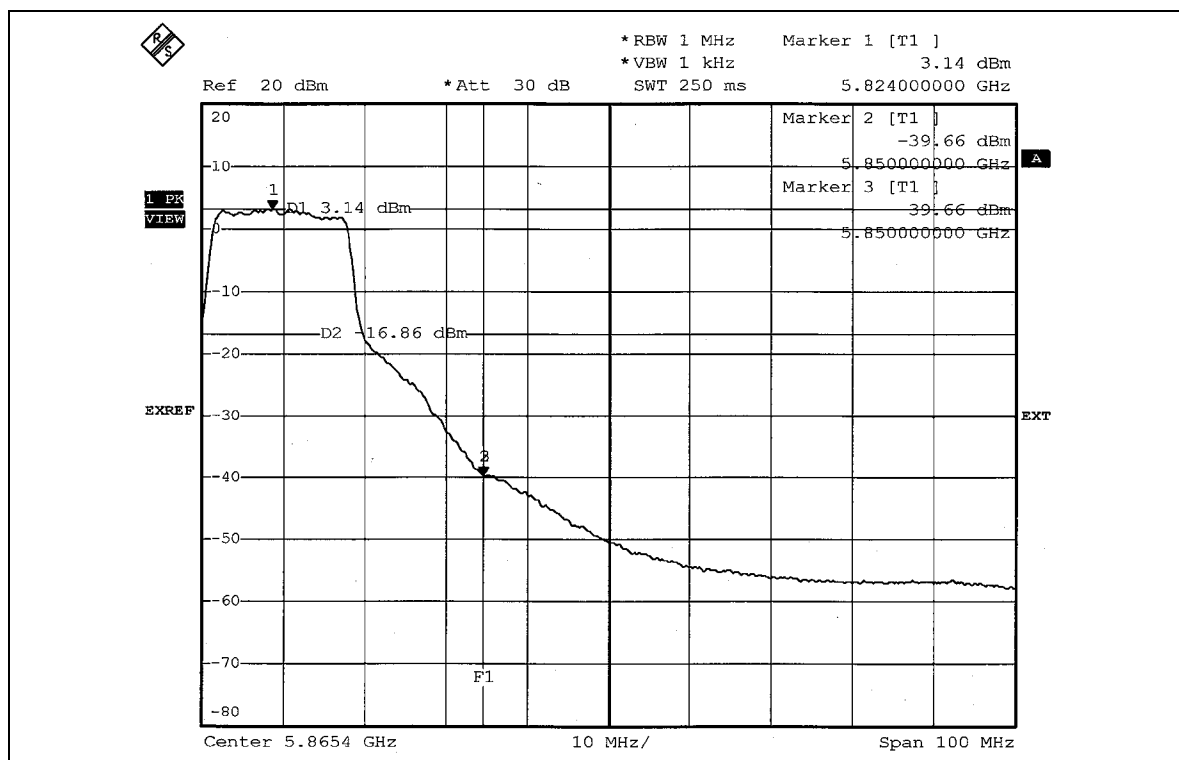



5.7 ANTENNA REQUIREMENT

5.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247(a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

5.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is PIFA antenna with UFL connector. The maximum Gain of the antenna is 0.56dBi.



6. TEST TYPES AND RESULTS (FOR BLUETOOTH)

6.1.1 CONDUCTED EMISSION MEASUREMENT

6.1.2 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

6.1.3 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Nov. 02, 2006
RF signal cable Woken	5D-FB	Cable-HyC02-01	Jan. 09, 2006
V-LISN SCHWARZBECK	NNBL 8226-2	8226-142	May. 02, 2006
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Jan. 20, 2006
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 3.
 3. The VCCI Site Registration No. is C-2047.




6.1.4 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

6.1.5 DEVIATION FROM TEST STANDARD

No deviation

6.1.6 TEST SETUP

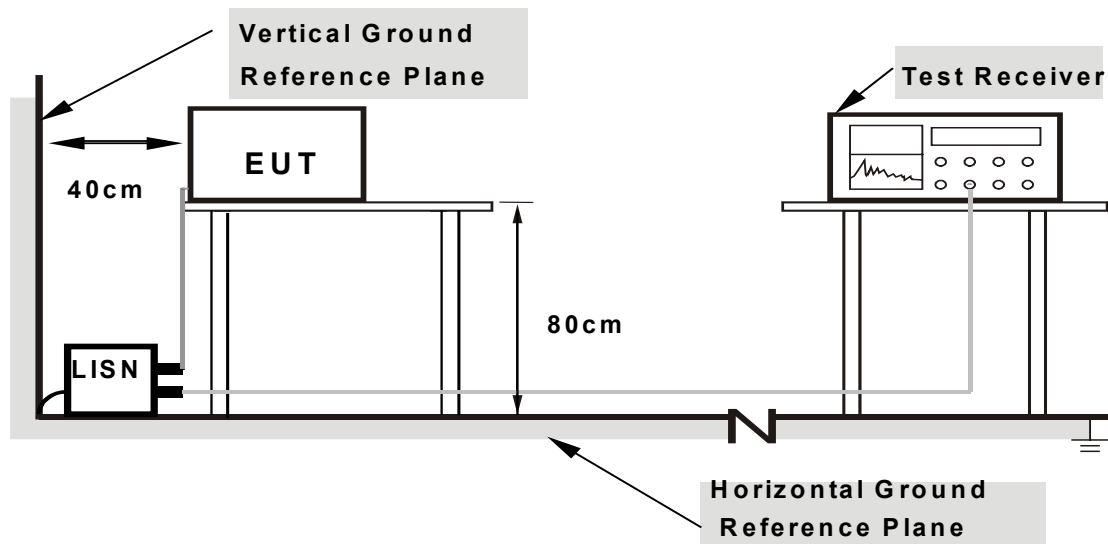

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

6.1.7 EUT OPERATING CONDITIONS

Same as 4.1.6




6.1.8 TEST RESULTS

Conducted Worst-Case Data (For Adapter: 0335A1965)

EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	PHASE	Line 1
CHANNEL	Channel 0	6dB BANDWIDTH	9 kHz
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TEST MODE	A
TESTED BY	Long Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.11	50.33	-	50.44	-	66.00	56.00	-15.56	-
2	0.216	0.11	39.04	-	39.15	-	62.96	52.96	-23.80	-
3	0.584	0.15	27.65	-	27.80	-	56.00	46.00	-28.20	-
4	3.363	0.28	29.72	-	30.00	-	56.00	46.00	-26.00	-
5	16.668	0.69	29.22	-	29.91	-	60.00	50.00	-30.09	-
6	21.855	1.10	30.53	-	31.63	-	60.00	50.00	-28.37	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

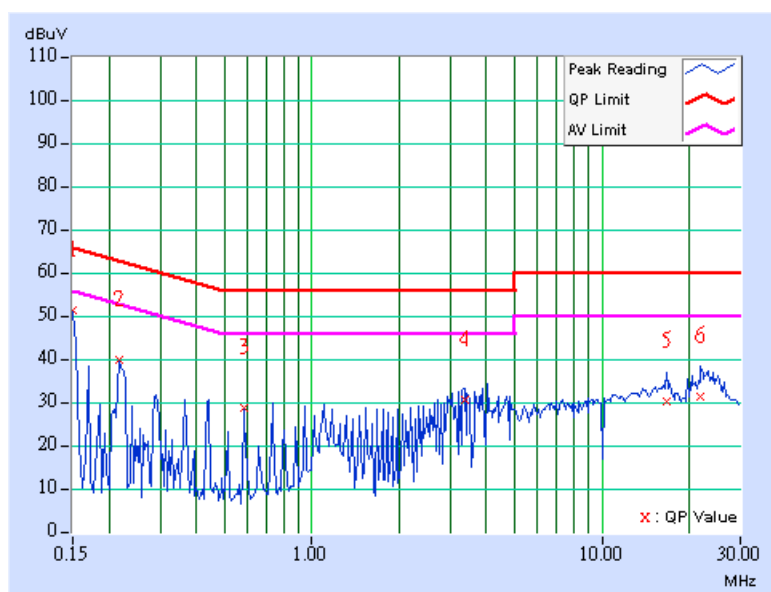




EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	PHASE	Line 2
CHANNEL	Channel 0	6dB BANDWIDTH	9 kHz
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TEST MODE	A
TESTED BY	Long Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.11	50.48	-	50.59	-	66.00	56.00	-15.41	-
2	0.220	0.11	40.47	-	40.58	-	62.81	52.81	-22.23	-
3	0.728	0.18	27.00	-	27.18	-	56.00	46.00	-28.82	-
4	3.945	0.29	35.72	-	36.01	-	56.00	46.00	-19.99	-
5	16.820	0.77	28.05	-	28.82	-	60.00	50.00	-31.18	-
6	23.332	1.13	28.58	-	29.71	-	60.00	50.00	-30.29	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

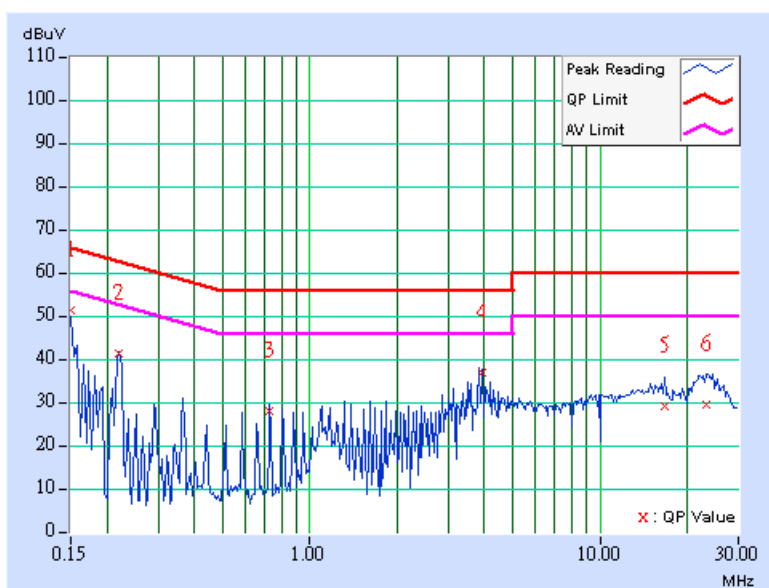




EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	PHASE	Line 1
CHANNEL	Channel 39	6dB BANDWIDTH	9 kHz
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TEST MODE	A
TESTED BY	Long Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.11	50.31	-	50.42	-	66.00	56.00	-15.58	-
2	0.220	0.11	40.35	-	40.46	-	62.81	52.81	-22.35	-
3	0.732	0.18	28.37	-	28.55	-	56.00	46.00	-27.45	-
4	3.871	0.29	33.13	-	33.42	-	56.00	46.00	-22.58	-
5	16.297	0.66	30.50	-	31.16	-	60.00	50.00	-28.84	-
6	23.090	1.18	31.87	-	33.05	-	60.00	50.00	-26.95	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

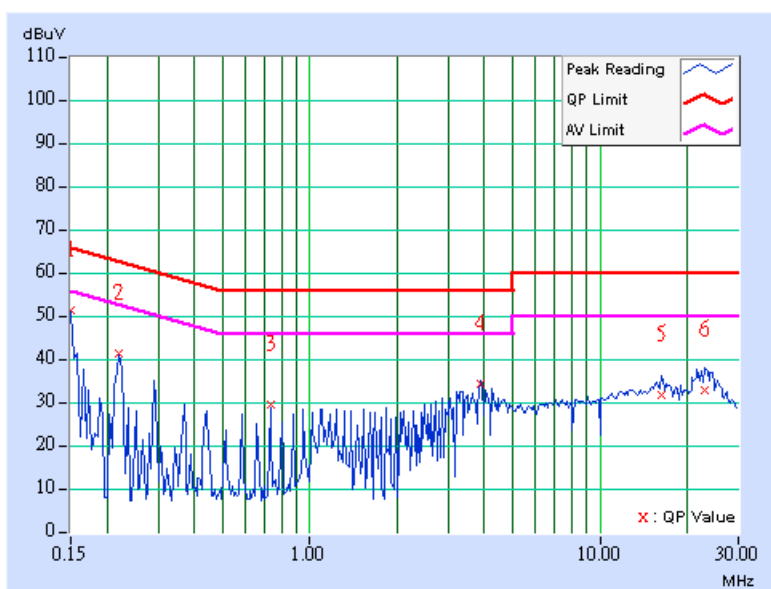




EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	PHASE	Line 2
CHANNEL	Channel 39	6dB BANDWIDTH	9 kHz
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TEST MODE	A
TESTED BY	Long Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.11	50.37	-	50.48	-	66.00	56.00	-15.52	-
2	0.295	0.11	34.13	-	34.24	-	60.40	50.40	-26.15	-
3	1.391	0.24	28.17	-	28.41	-	56.00	46.00	-27.59	-
4	3.871	0.29	35.83	-	36.12	-	56.00	46.00	-19.88	-
5	16.883	0.77	29.48	-	30.25	-	60.00	50.00	-29.75	-
6	23.391	1.14	30.45	-	31.59	-	60.00	50.00	-28.41	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

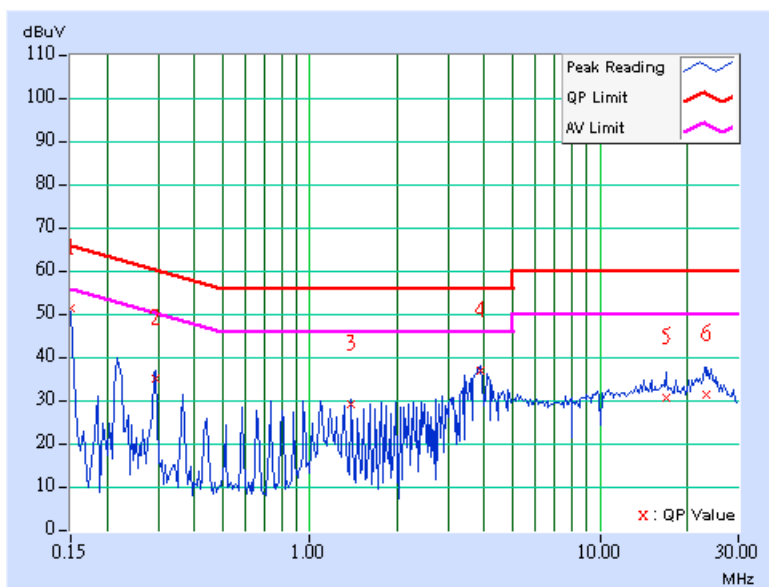




EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	PHASE	Line 1
CHANNEL	Channel 78	6dB BANDWIDTH	9 kHz
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TEST MODE	A
TESTED BY	Long Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.11	50.19	-	50.30	-	66.00	56.00	-15.70	-
2	0.224	0.11	34.57	-	34.68	-	62.66	52.66	-27.98	-
3	0.728	0.18	27.65	-	27.83	-	56.00	46.00	-28.17	-
4	3.801	0.29	31.05	-	31.34	-	56.00	46.00	-24.66	-
5	18.043	0.81	28.62	-	29.43	-	60.00	50.00	-30.57	-
6	24.320	1.27	30.05	-	31.32	-	60.00	50.00	-28.68	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

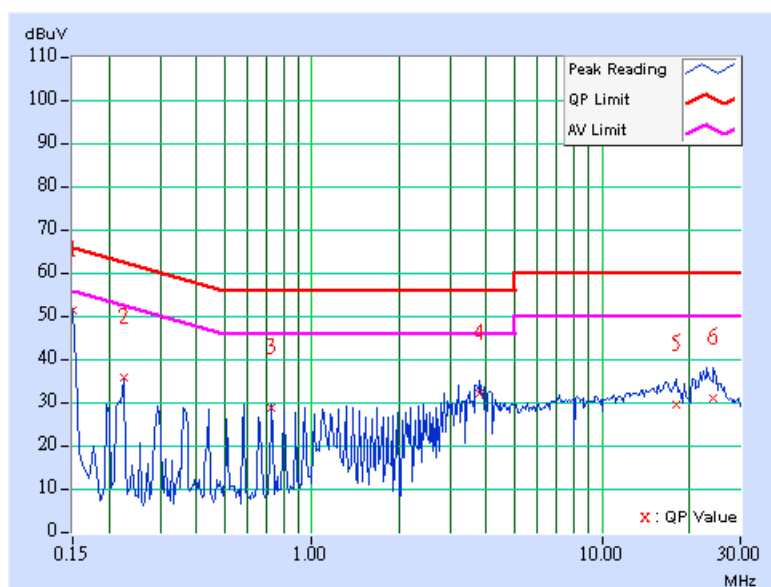




EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	PHASE	Line 2
CHANNEL	Channel 78	6dB BANDWIDTH	9 kHz
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TEST MODE	A
TESTED BY	Long Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.11	50.31	-	50.42	-	66.00	56.00	-15.58	-
2	0.220	0.11	40.29	-	40.40	-	62.81	52.81	-22.41	-
3	1.316	0.24	27.39	-	27.63	-	56.00	46.00	-28.37	-
4	3.946	0.29	36.00	-	36.29	-	56.00	46.00	-19.71	-
5	16.289	0.74	30.02	-	30.76	-	60.00	50.00	-29.24	-
6	23.436	1.14	29.76	-	30.90	-	60.00	50.00	-29.10	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

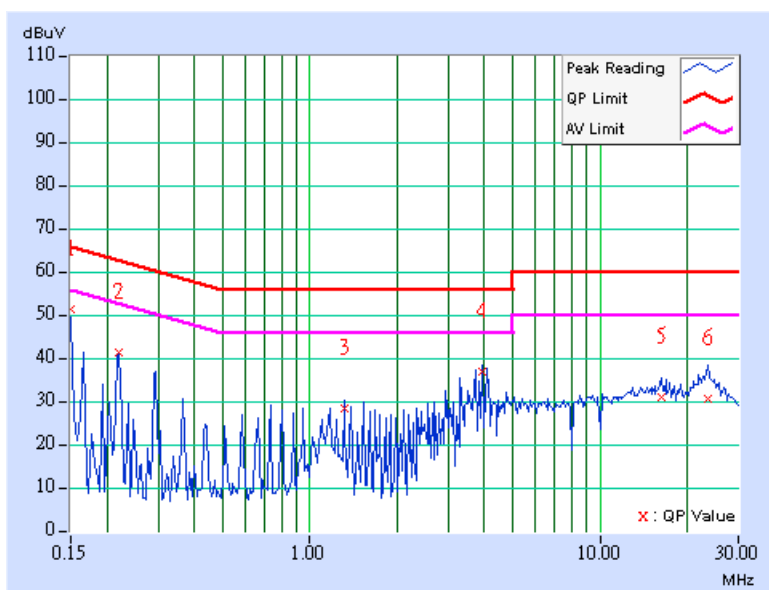




Conducted Worst-Case Data (For Adapter: PA-1650-02)

EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	PHASE	Line 1
CHANNEL	Channel 0	6dB BANDWIDTH	9 kHz
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TEST MODE	B
TESTED BY	Long Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.213	0.11	46.10	-	46.21	-	63.11	53.11	-16.90	-
2	0.287	0.11	41.43	-	41.54	-	60.62	50.62	-19.07	-
3	1.359	0.24	30.86	-	31.10	-	56.00	46.00	-24.90	-
4	4.004	0.29	34.76	-	35.05	-	56.00	46.00	-20.95	-
5	9.578	0.43	29.79	-	30.22	-	60.00	50.00	-29.78	-
6	22.867	1.17	28.05	-	29.22	-	60.00	50.00	-30.78	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

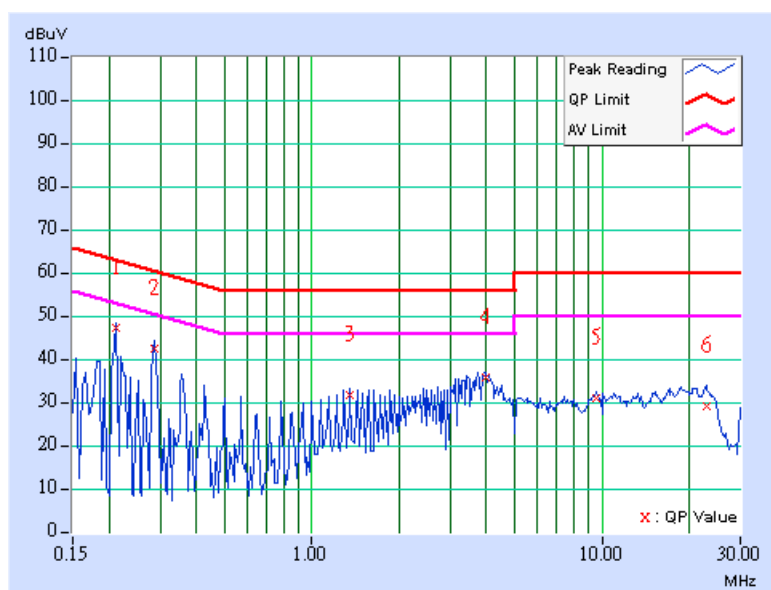




EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	PHASE	Line 2
CHANNEL	Channel 0	6dB BANDWIDTH	9 kHz
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TEST MODE	B
TESTED BY	Long Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.11	46.85	-	46.96	-	66.00	56.00	-19.04	-
2	0.216	0.11	45.21	-	45.32	-	62.96	52.96	-17.63	-
3	1.574	0.24	31.94	-	32.18	-	56.00	46.00	-23.82	-
4	3.785	0.29	34.37	-	34.66	-	56.00	46.00	-21.34	-
5	7.793	0.45	30.76	-	31.21	-	60.00	50.00	-28.79	-
6	23.090	1.12	27.55	-	28.67	-	60.00	50.00	-31.33	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

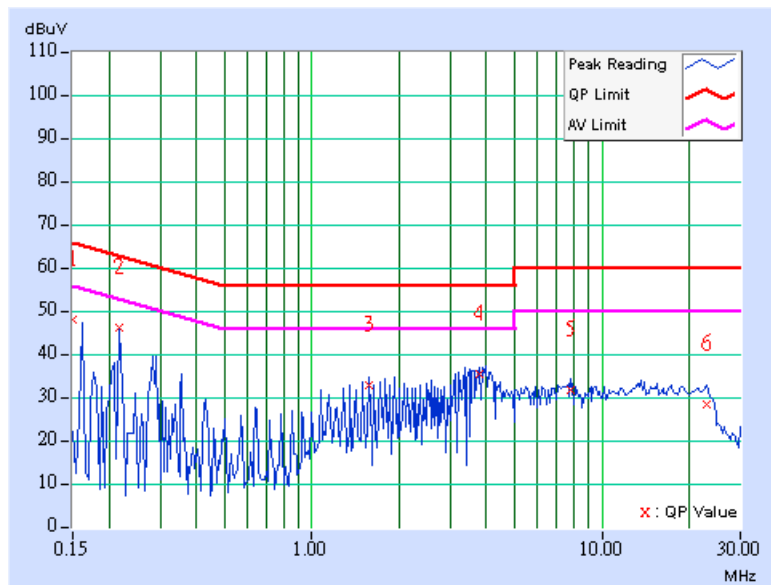




EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	PHASE	Line 1
CHANNEL	Channel 39	6dB BANDWIDTH	9 kHz
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TEST MODE	B
TESTED BY	Long Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.11	45.51	-	45.62	-	66.00	56.00	-20.38	-
2	0.213	0.11	43.87	-	43.98	-	63.11	53.11	-19.13	-
3	1.574	0.24	31.39	-	31.63	-	56.00	46.00	-24.37	-
4	3.641	0.28	31.75	-	32.03	-	56.00	46.00	-23.97	-
5	9.863	0.44	29.49	-	29.93	-	60.00	50.00	-30.07	-
6	18.941	0.89	29.01	-	29.90	-	60.00	50.00	-30.10	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

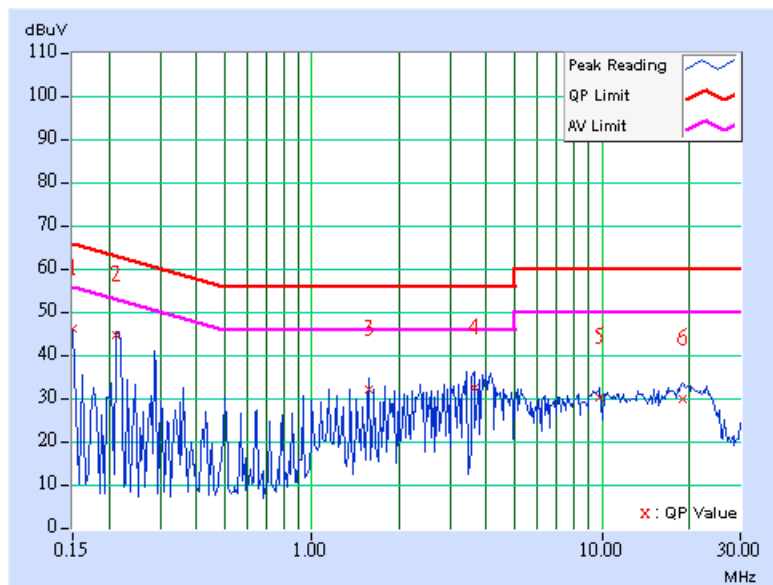




EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	PHASE	Line 2
CHANNEL	Channel 39	6dB BANDWIDTH	9 kHz
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TEST MODE	B
TESTED BY	Long Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.11	45.98	-	46.09	-	66.00	56.00	-19.91	-
2	0.215	0.11	44.95	-	45.06	-	63.01	53.01	-17.95	-
3	1.574	0.24	31.96	-	32.20	-	56.00	46.00	-23.80	-
4	3.645	0.28	35.06	-	35.34	-	56.00	46.00	-20.66	-
5	7.289	0.43	30.94	-	31.37	-	60.00	50.00	-28.63	-
6	19.082	0.92	28.60	-	29.52	-	60.00	50.00	-30.48	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

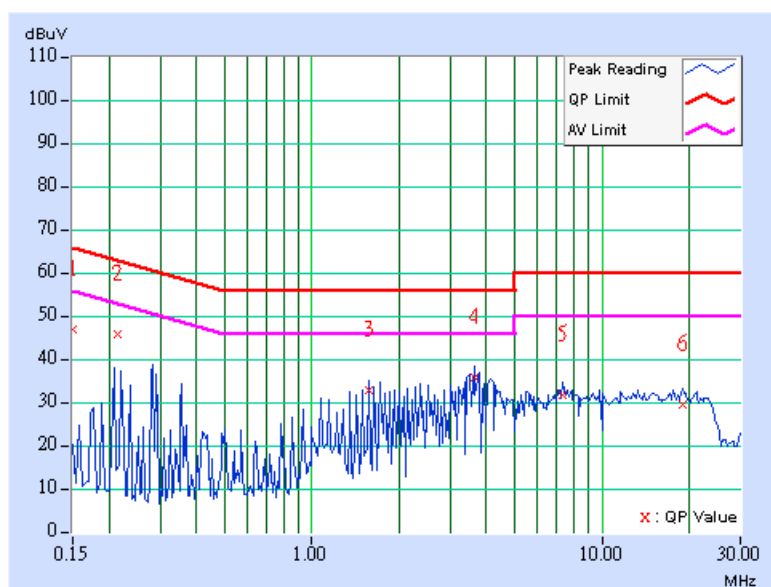




EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	PHASE	Line 1
CHANNEL	Channel 78	6dB BANDWIDTH	9 kHz
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TEST MODE	B
TESTED BY	Long Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.11	45.03	-	45.14	-	66.00	56.00	-20.86	-
2	0.216	0.11	43.45	-	43.56	-	62.96	52.96	-19.39	-
3	2.148	0.25	28.37	-	28.62	-	56.00	46.00	-27.38	-
4	3.859	0.29	35.70	-	35.99	-	56.00	46.00	-20.01	-
5	7.793	0.38	28.79	-	29.17	-	60.00	50.00	-30.83	-
6	21.164	1.06	26.85	-	27.91	-	60.00	50.00	-32.09	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

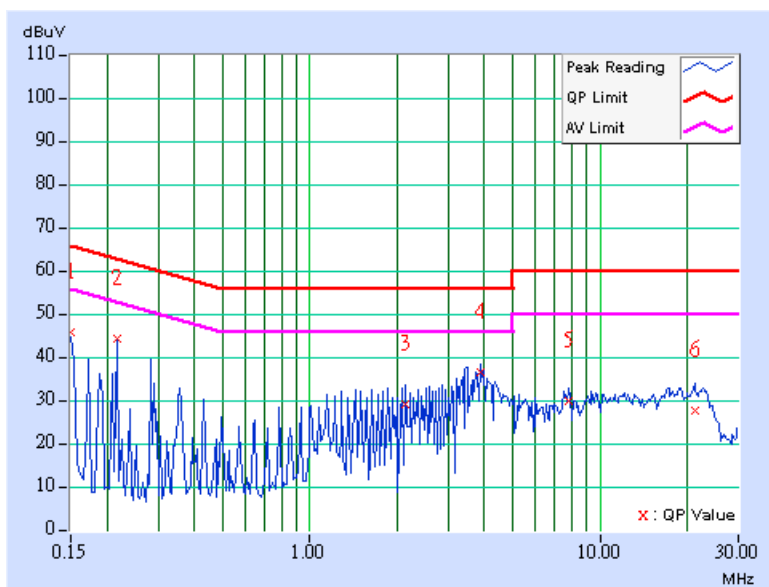




EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	PHASE	Line 2
CHANNEL	Channel 78	6dB BANDWIDTH	9 kHz
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TEST MODE	B
TESTED BY	Long Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.150	0.11	44.63	-	44.74	-	66.00
2	0.216	0.11	43.00	-	43.11	-	62.96	52.96	-19.84	-
3	1.504	0.24	31.18	-	31.42	-	56.00	46.00	-24.58	-
4	3.934	0.29	34.65	-	34.94	-	56.00	46.00	-21.06	-
5	9.582	0.52	28.84	-	29.36	-	60.00	50.00	-30.64	-
6	20.805	1.02	26.85	-	27.87	-	60.00	50.00	-32.13	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

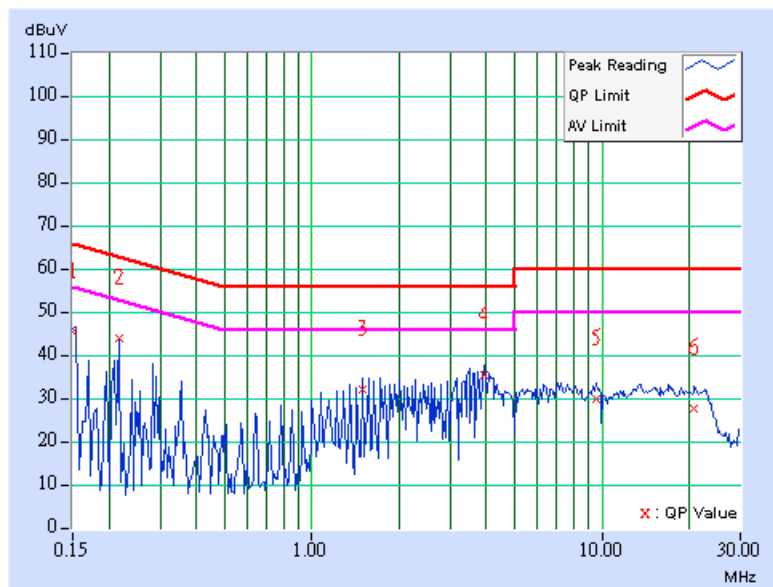



6.2 RADIATED EMISSION MEASUREMENT

6.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



6.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	100033	May. 19, 2006
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100025	Dec. 05, 2006
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Jun. 01, 2006
HORN Antenna SCHWARZBECK	9120D	9120D-408	Jan. 17, 2006
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Jan. 23, 2006
Preamplifier Agilent	8447D	2944A10633	Nov. 04, 2006
Preamplifier Agilent	8449B	3008A01964	Oct. 30, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218183/4	Jan. 26, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218195/4	Jan. 26, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA
Turn Table ADT.	TT100.	TT93021703	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 2.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The VCCI Site Registration No. is R-237.
 5. The IC Site Registration No. is IC4924-3.



6.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.

6.2.4 DEVIATION FROM TEST STANDARD

No deviation

6.2.5 TEST SETUP

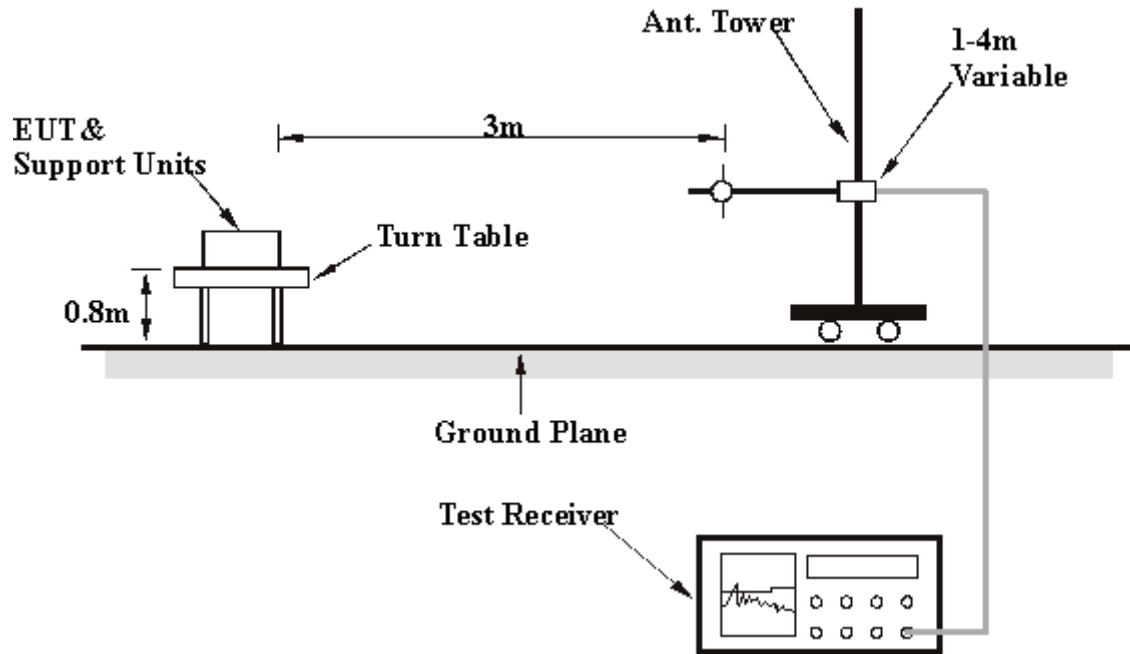

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

6.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



6.2.7 TEST RESULTS

Radiated Worst Case Data (For Adapter: 0335A1965)

EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 78	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TEST MODE	A
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	47.49	25.44 QP	40.00	-14.56	2.00 H	226	10.76	14.68
2	94.15	29.55 QP	43.50	-13.95	2.00 H	178	20.18	9.37
3	96.09	32.86 QP	43.50	-10.64	1.00 H	58	23.48	9.37
4	160.24	32.22 QP	43.50	-11.28	2.00 H	178	18.44	13.79
5	189.40	29.92 QP	43.50	-13.58	1.00 H	292	18.18	11.74
6	226.33	32.53 QP	46.00	-13.47	2.00 H	178	20.57	11.96
7	490.70	31.46 QP	46.00	-14.54	2.00 H	178	11.41	20.05
8	589.84	32.56 QP	46.00	-13.44	2.00 H	178	10.00	22.55
9	615.11	32.86 QP	46.00	-13.14	1.25 H	352	9.86	23.01
10	638.44	34.00 QP	46.00	-12.00	2.00 H	337	10.85	23.16
11	716.19	32.39 QP	46.00	-13.61	1.00 H	10	7.86	24.53
12	745.35	33.66 QP	46.00	-12.34	1.25 H	352	7.95	25.71
13	774.51	32.81 QP	46.00	-13.19	1.75 H	244	6.72	26.09

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	59.16	36.59 QP	40.00	-3.41	1.25 V	250	22.94	13.64
2	74.71	36.66 QP	40.00	-3.34	2.00 V	49	25.18	11.48
3	107.76	30.82 QP	43.50	-12.68	1.25 V	49	20.75	10.07
4	160.24	33.52 QP	43.50	-9.98	1.00 V	166	19.74	13.79
5	162.18	34.13 QP	43.50	-9.37	2.00 V	76	20.50	13.63
6	589.84	34.89 QP	46.00	-11.11	2.00 V	166	12.34	22.55
7	615.11	32.59 QP	46.00	-13.41	2.00 V	64	9.58	23.01
8	638.44	33.22 QP	46.00	-12.78	1.00 V	307	10.07	23.16
9	716.19	31.03 QP	46.00	-14.97	1.00 V	46	6.50	24.53
10	774.51	31.82 QP	46.00	-14.18	1.00 V	148	5.73	26.09
11	801.72	31.85 QP	46.00	-14.15	1.00 V	49	5.56	26.29

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.


Radiated Worst Case Data (For Adapter: PA-1650-02)

EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 78	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TEST MODE	B
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	94.15	34.73 QP	43.50	-8.77	1.50 H	235	25.36	9.37
2	96.09	34.70 QP	43.50	-8.80	1.75 H	289	25.33	9.37
3	160.24	36.45 QP	43.50	-7.05	1.50 H	235	22.66	13.79
4	323.53	31.04 QP	46.00	-14.96	1.00 H	337	14.85	16.18
5	589.84	33.98 QP	46.00	-12.02	1.70 H	98	11.43	22.55
6	615.11	33.22 QP	46.00	-12.78	1.00 H	111	10.21	23.01

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	59.16	36.08 QP	40.00	-3.92	1.00 V	280	22.44	13.64
2	160.24	39.53 QP	43.50	-3.97	1.00 V	255	25.74	13.79
3	162.18	39.23 QP	43.50	-4.27	1.25 V	82	25.60	13.63
4	453.77	28.51 QP	46.00	-17.49	1.25 V	34	9.38	19.13
5	589.84	35.87 QP	46.00	-10.13	1.00 V	208	13.32	22.55
6	615.11	35.59 QP	46.00	-10.41	1.00 V	255	12.58	23.01

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 0	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	GFSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	22deg. C, 62%RH, 991hPa	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1730.00	40.56 PK	74.00	-33.44	1.12 H	247	11.70	28.86
1	1730.00	32.87 AV	54.00	-21.13	1.12 H	247	4.01	28.86
2	2390.00	46.54 PK	74.00	-27.46	1.33 H	8	14.70	31.84
2	2390.00	36.54 AV	54.00	-17.46	1.33 H	8	4.70	31.84
3	*2402.00	85.97 PK			1.33 H	8	54.09	31.88
3	*2402.00	55.97 AV			1.33 H	8	24.09	31.88
4	4804.00	42.97 PK	74.00	-31.03	1.16 H	243	4.39	38.58
4	4804.00	12.97 AV	54.00	-41.03	1.16 H	243	-25.61	38.58

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1730.00	41.76 PK	74.00	-32.24	1.02 V	3	12.90	28.86
1	1730.00	34.03 AV	54.00	-19.97	1.02 V	3	5.17	28.86
2	2390.00	52.51 PK	74.00	-21.49	1.17 V	10	20.67	31.84
2	2390.00	42.47 AV	54.00	-11.53	1.17 V	10	10.63	31.84
3	*2402.00	91.94 PK			1.17 V	10	60.06	31.88
3	*2402.00	61.94 AV			1.17 V	10	30.06	31.88
4	4804.00	44.22 PK	74.00	-29.78	1.02 V	130	5.63	38.58
4	4804.00	14.22 AV	54.00	-39.78	1.02 V	130	-24.37	38.58

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle be equal to: $20\log(3.125/100) = -30$ dB.
 6. Average value = peak reading $-20\log(\text{duty cycle})$.



EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 39	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	GFSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	22deg. C, 62%RH, 991hPa	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1730.00	41.87 PK	74.00	-32.13	1.09 H	258	13.01	28.86
1	1730.00	34.12 AV	54.00	-19.88	1.09 H	258	5.26	28.86
2	*2441.00	87.72 PK			1.31 H	12	55.59	32.13
2	*2441.00	57.72 AV			1.31 H	12	25.59	32.13
3	4882.00	44.12 PK	74.00	-29.88	1.13 H	256	5.53	38.59
3	4882.00	14.12 AV	54.00	-39.88	1.13 H	256	-24.47	38.59

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1730.00	43.21 PK	74.00	-30.79	1.03 V	22	14.35	28.86
1	1730.00	35.62 AV	54.00	-18.38	1.03 V	22	6.76	28.86
2	*2441.00	93.74 PK			1.14 V	4	61.61	32.13
2	*2441.00	63.74 AV			1.14 V	4	31.61	32.13
3	4882.00	45.71 PK	74.00	-28.29	1.09 V	172	7.12	38.59
3	4882.00	15.71 AV	54.00	-38.29	1.09 V	172	-22.88	38.59

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle be equal to: $20\log(3.125/100) = -30$ dB.
 6. Average value = peak reading $-20\log(\text{duty cycle})$.



EUT	Mini PC	MEASUREMENT DETAIL	
MODEL	P60	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 78	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	GFSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	22deg. C, 62%RH, 991hPa	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1730.00	41.09 PK	74.00	-32.91	1.08 H	244	12.23	28.86
1	1730.00	33.38 AV	54.00	-20.62	1.08 H	244	4.52	28.86
2	*2480.00	86.37 PK			1.35 H	12	53.99	32.38
2	*2480.00	56.37 AV			1.35 H	12	23.99	32.38
3	2483.50	46.06 PK	74.00	-27.94	1.35 H	12	13.66	32.40
3	2483.50	36.06 AV	54.00	-17.94	1.35 H	12	3.66	32.40
4	4960.00	43.68 PK	74.00	-30.32	1.09 H	213	5.19	38.49
4	4960.00	13.68 AV	54.00	-40.32	1.09 H	213	-24.81	38.49

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1730.00	42.34 PK	74.00	-31.66	1.10 V	46	13.48	28.86
1	1730.00	34.68 AV	54.00	-19.32	1.10 V	46	5.82	28.86
2	*2480.00	92.28 PK			1.11 V	0	59.90	32.38
2	*2480.00	62.28 AV			1.11 V	0	29.90	32.38
3	2483.50	51.97 PK	74.00	-22.03	1.11 V	0	19.57	32.40
3	2483.50	41.97 AV	54.00	-12.03	1.11 V	0	9.57	32.40
4	4960.00	45.37 PK	74.00	-28.63	1.12 V	235	6.88	38.49
4	4960.00	15.37 AV	54.00	-38.63	1.12 V	235	-23.12	38.49

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle be equal to: $20\log(3.125/100) = -30$ dB.
 6. Average value = peak reading $-20\log(\text{duty cycle})$.



6.3 NUMBER OF HOPPING FREQUENCY USED

6.3.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 channels frequencies, and should be equally spaced.

6.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.


6.3.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.

6.3.4 DEVIATION FROM TEST STANDARD



No deviation.

6.3.5 TEST SETUP

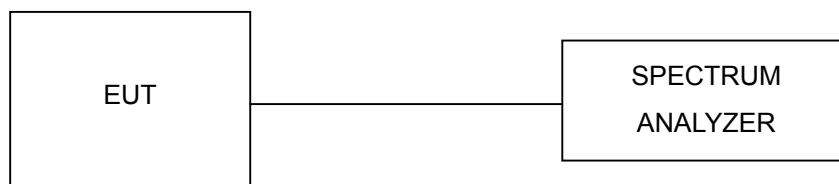

6.3.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

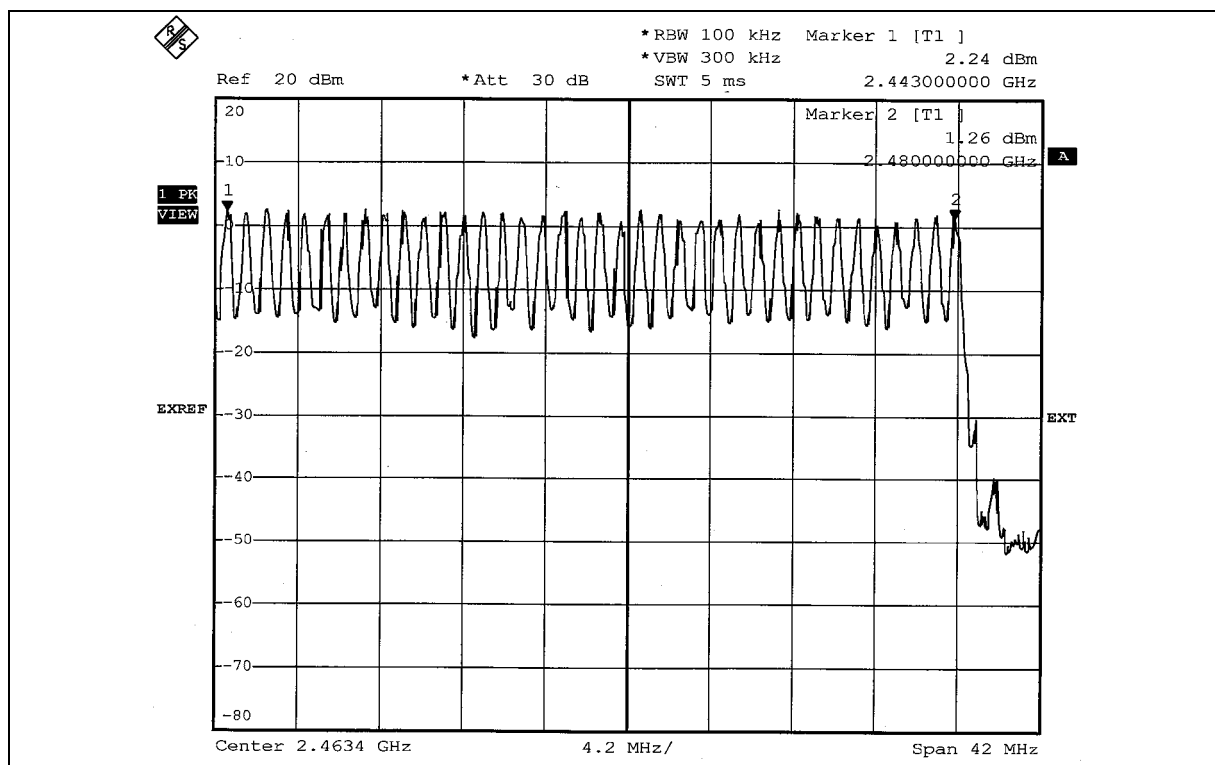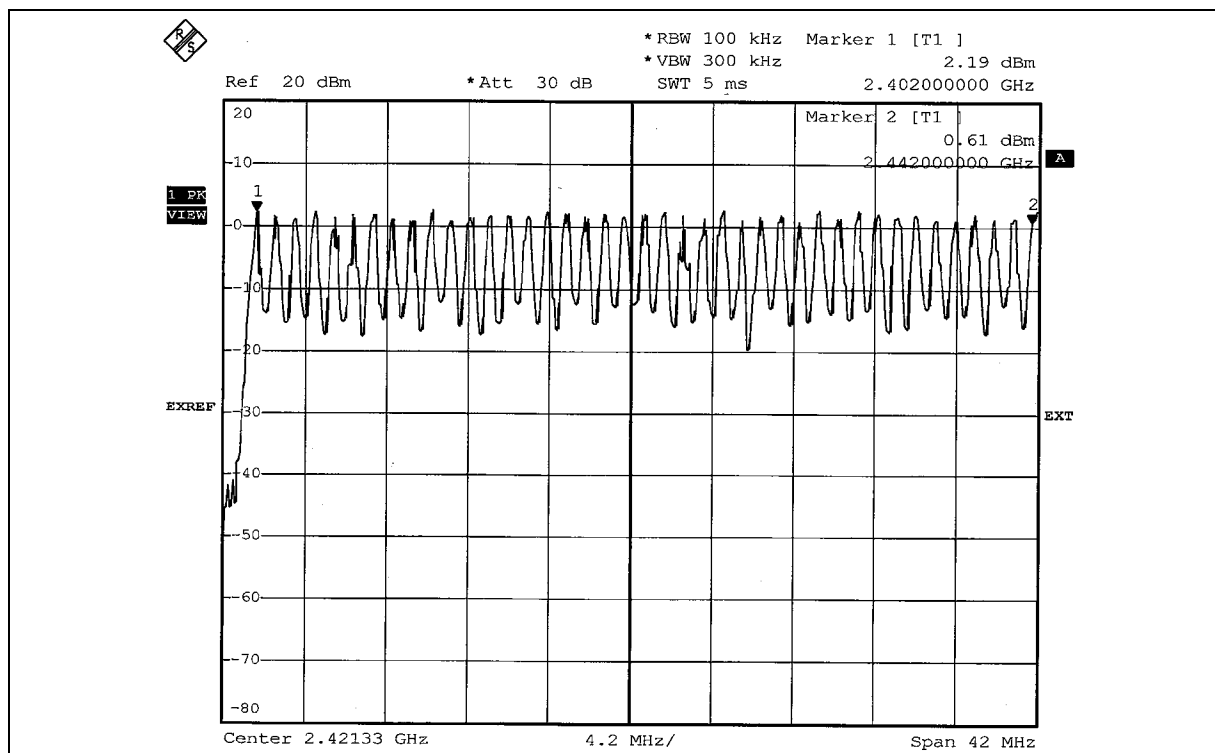



6.4 DWELL TIME ON EACH CHANNEL

6.4.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

6.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTES: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

6.4.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.

6.4.4 DEVIATION FROM TEST STANDARD

No deviation.



6.4.5 TEST SETUP





6.4.6 TEST RESULTS

MODE	NUMBER OF TRANSMISSION IN A 31.6 (79HOPPING * 0.4)	LENGTH OF TRANSMISSION TIME (msec)	RESULT (msec)	LIMIT (msec)
DH1	50 (times / 5 sec) * 6.32 = 316.00 times	0.480	151.68	400
DH3	25 (times / 5 sec) * 6.32 = 158.00 times	1.770	279.66	400
DH5	17 (times / 5 sec) * 6.32 = 107.44 times	3.020	324.47	400

NOTE: Test plots of the transmitting time slot are shown on next 3 pages.





DH1

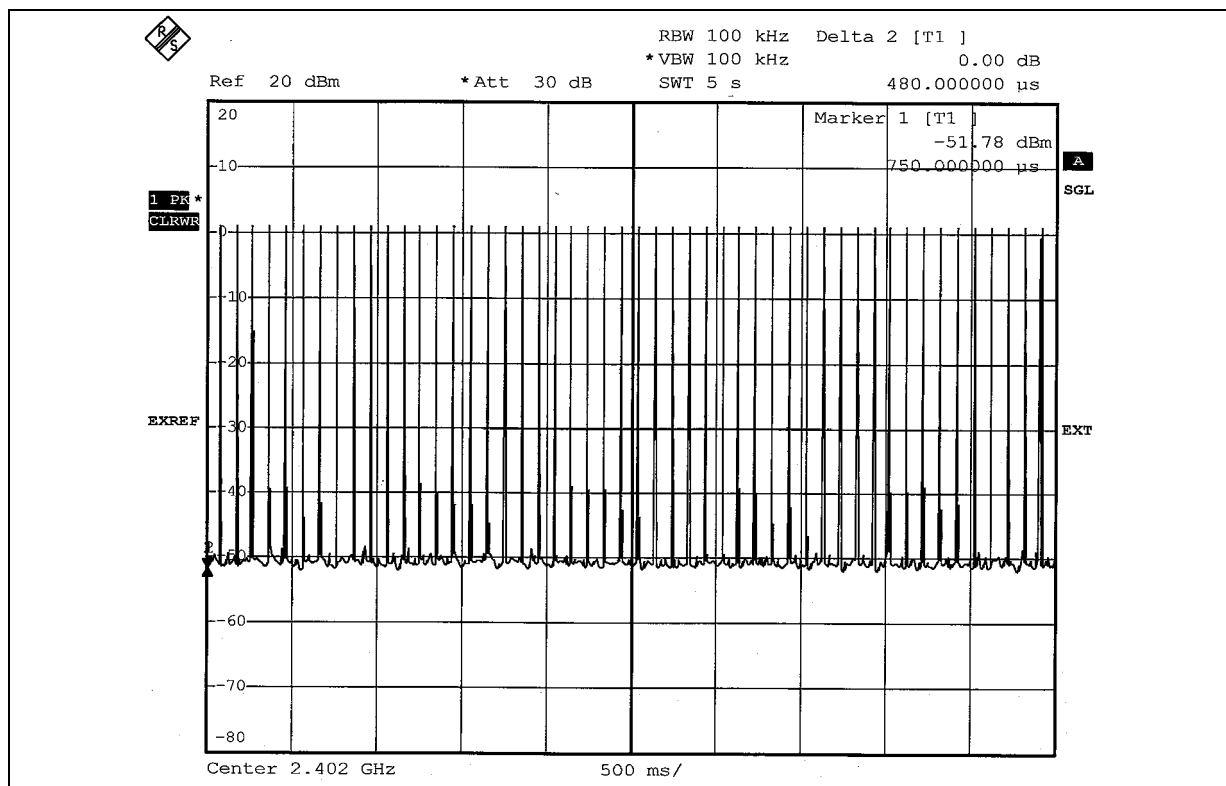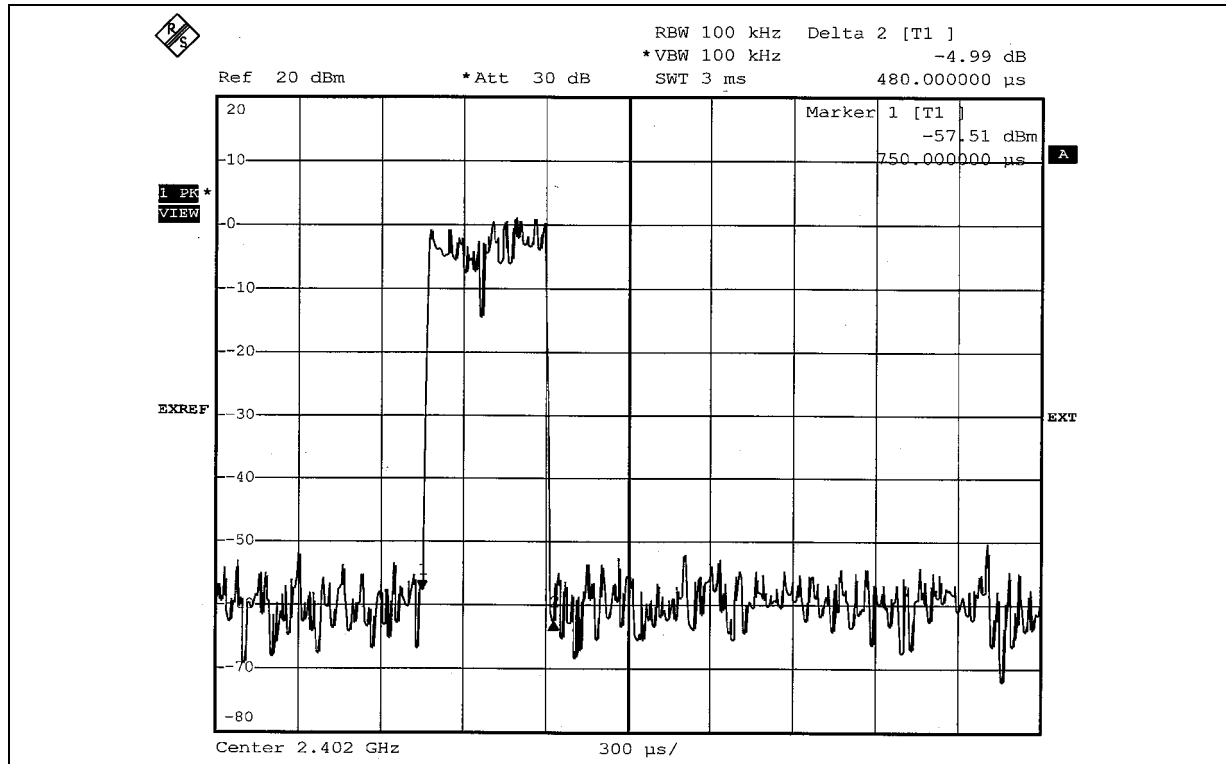





DH3

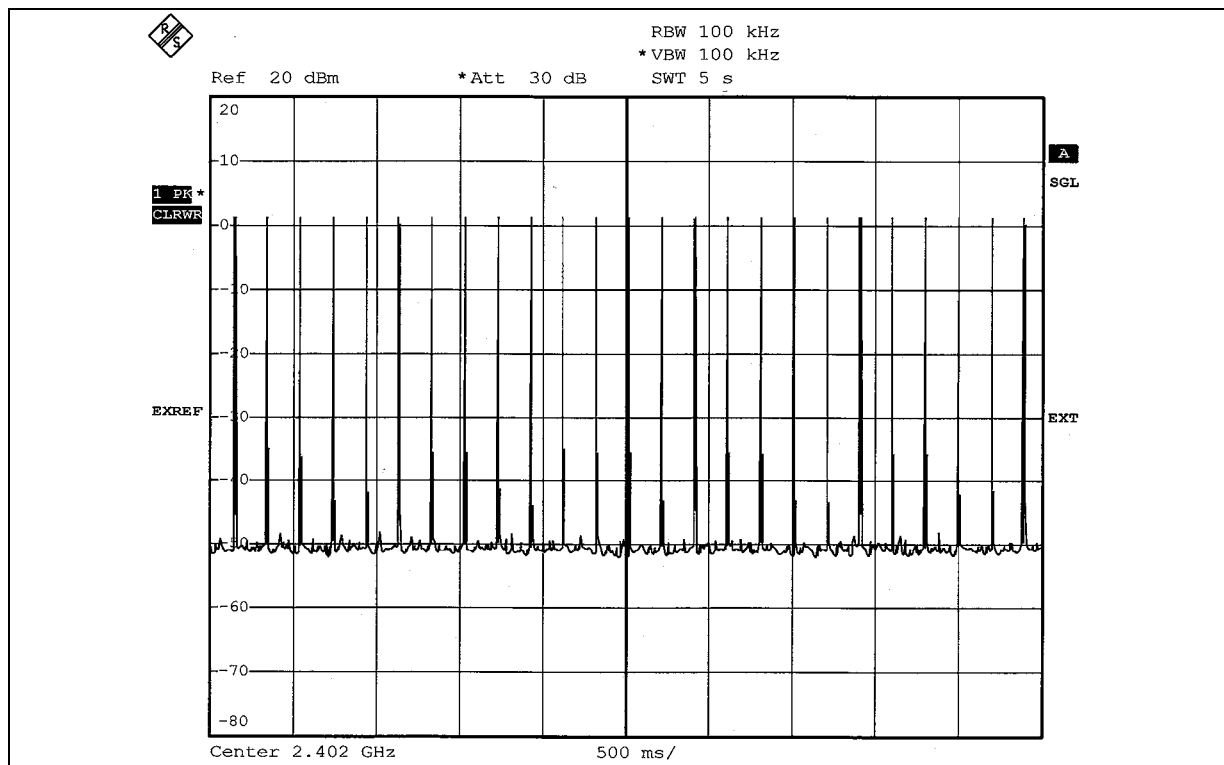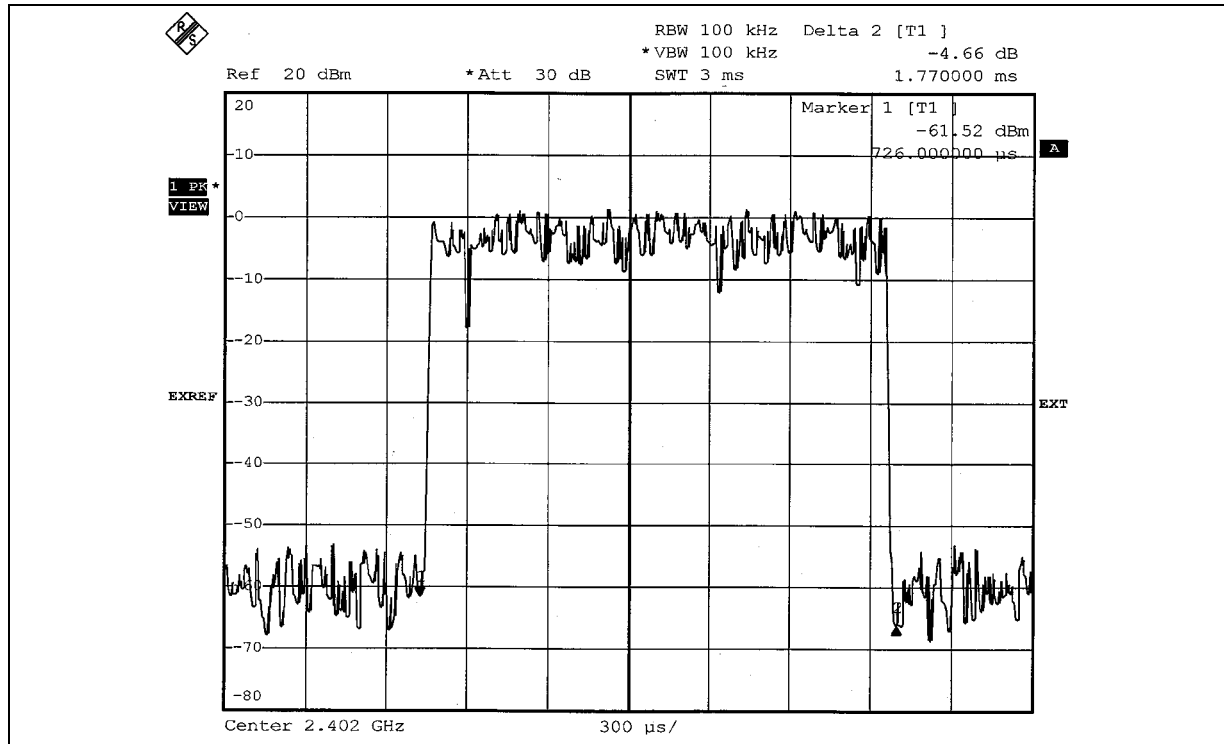



DH5

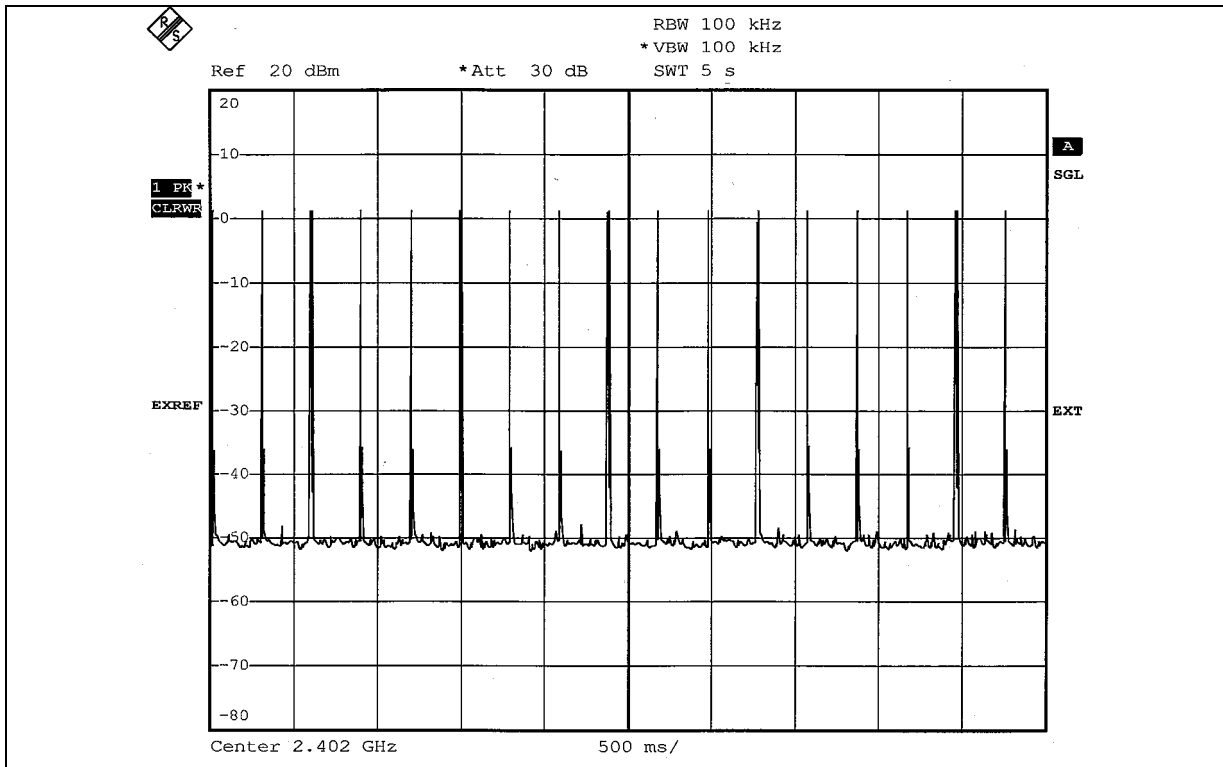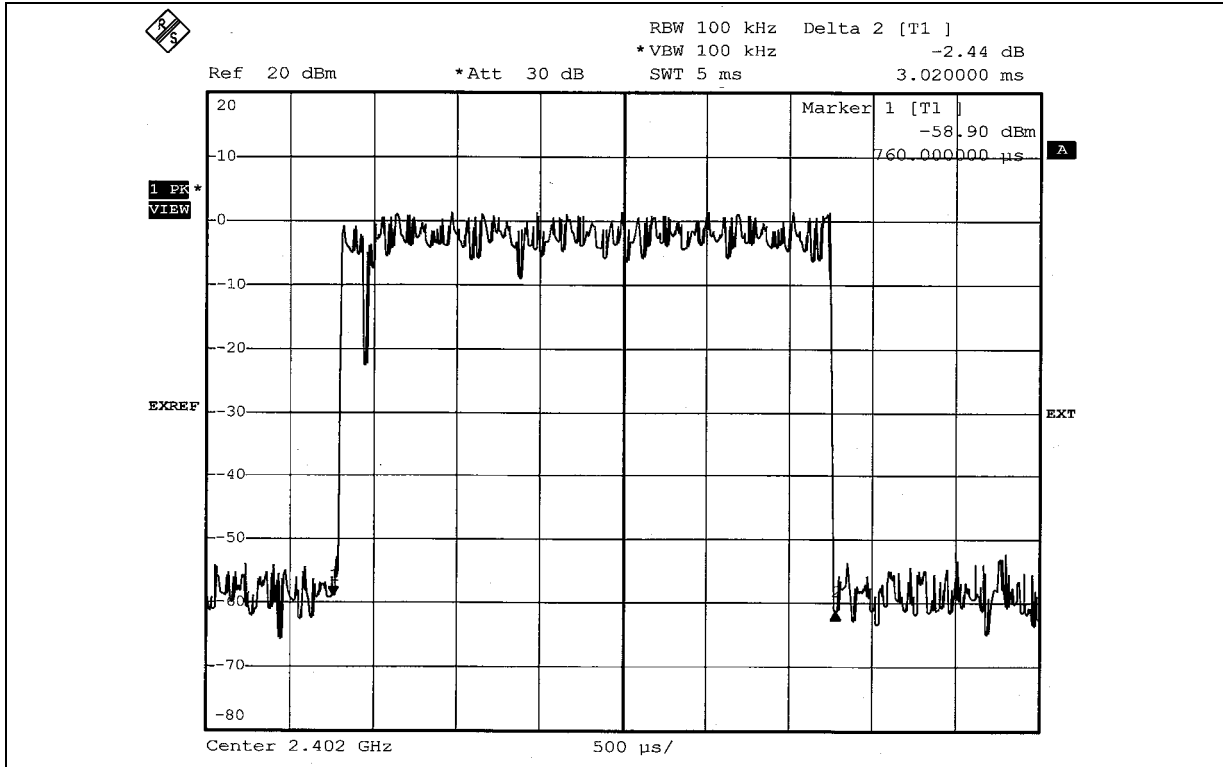



6.5 CHANNEL BANDWIDTH

6.5.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, the 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

6.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.


6.5.3 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

6.5.4 DEVIATION FROM TEST STANDARD

No deviation.

6.5.5 TEST SETUP

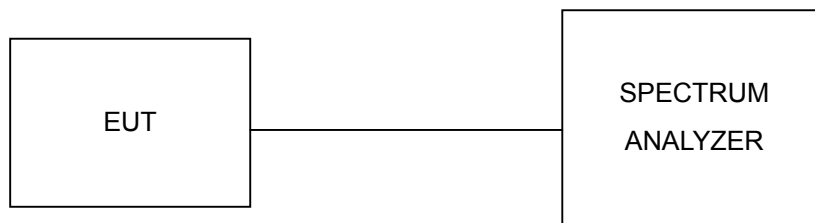

6.5.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.




6.5.7 TEST RESULTS

EUT	Mini PC	MODEL	P60
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	27deg. C, 54%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Long Chen


CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	2402	0.801
39	2441	0.765
78	2480	0.762



CH 0

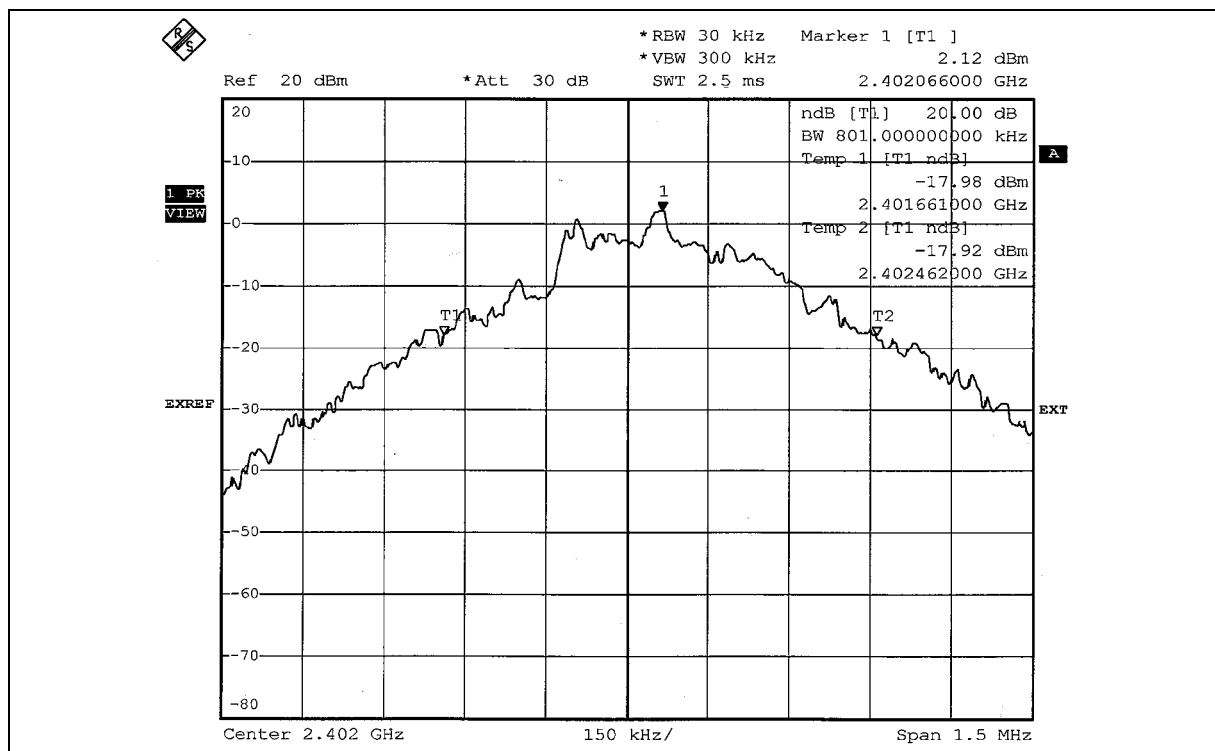


CH 39

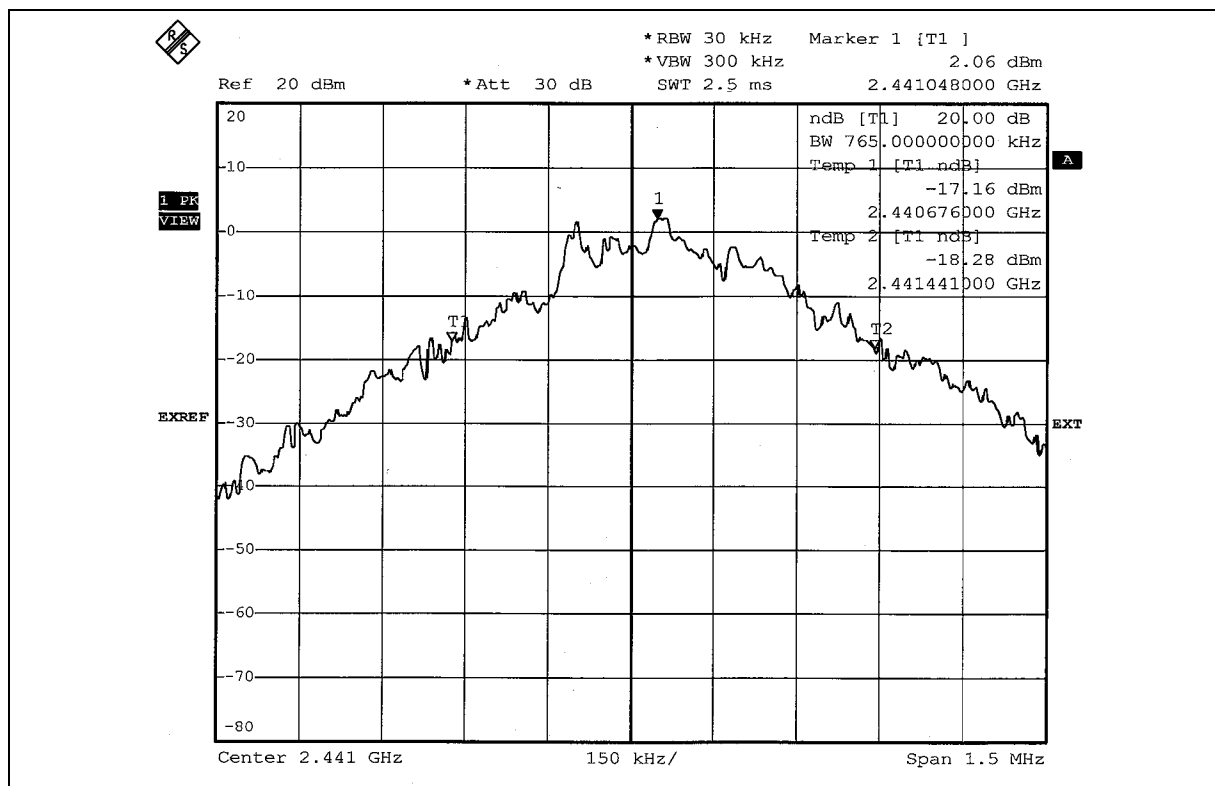



CH 78

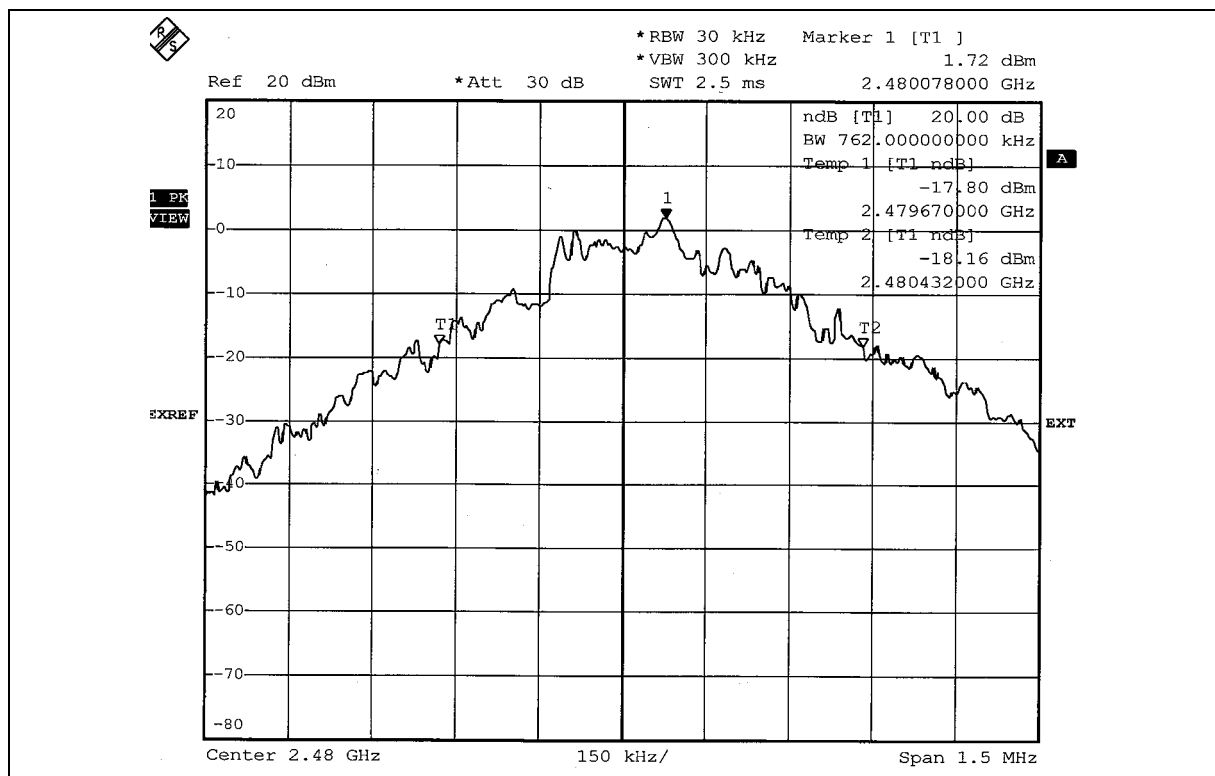

6.6 HOPPING CHANNEL SEPARATION

6.6.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or 20dB hopping channel bandwidth (whichever is greater).

6.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTES: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

6.6.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

6.6.4 DEVIATION FROM TEST STANDARD

No deviation.

6.6.5 TEST SETUP





6.6.6 TEST RESULTS


EUT	Mini PC	MODEL	P60
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	27deg. C, 63%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Long Chen

CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	1.000	0.801	PASS
39	2441	1.005	0.765	PASS
78	2480	1.005	0.762	PASS


NOTE: The minimum limit is 20dB bandwidth. Test results please refer to next two pages.



CH 0

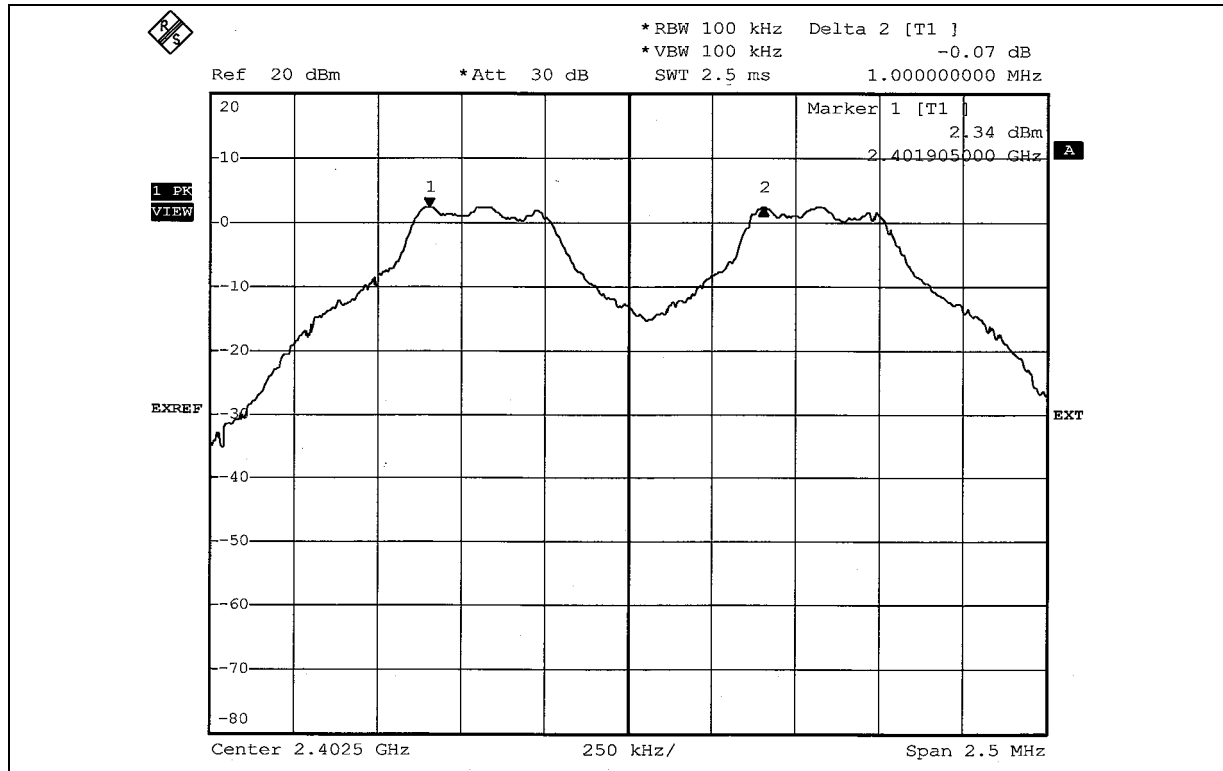


CH 39

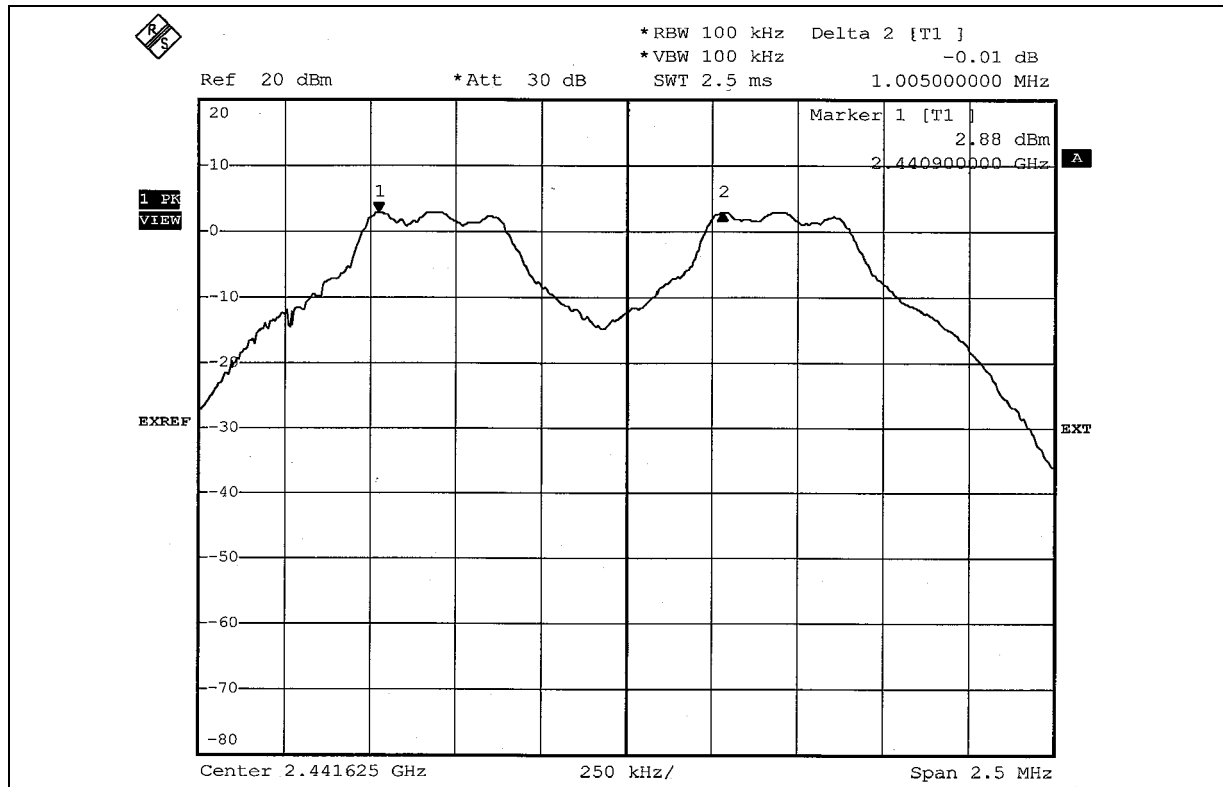



CH 78

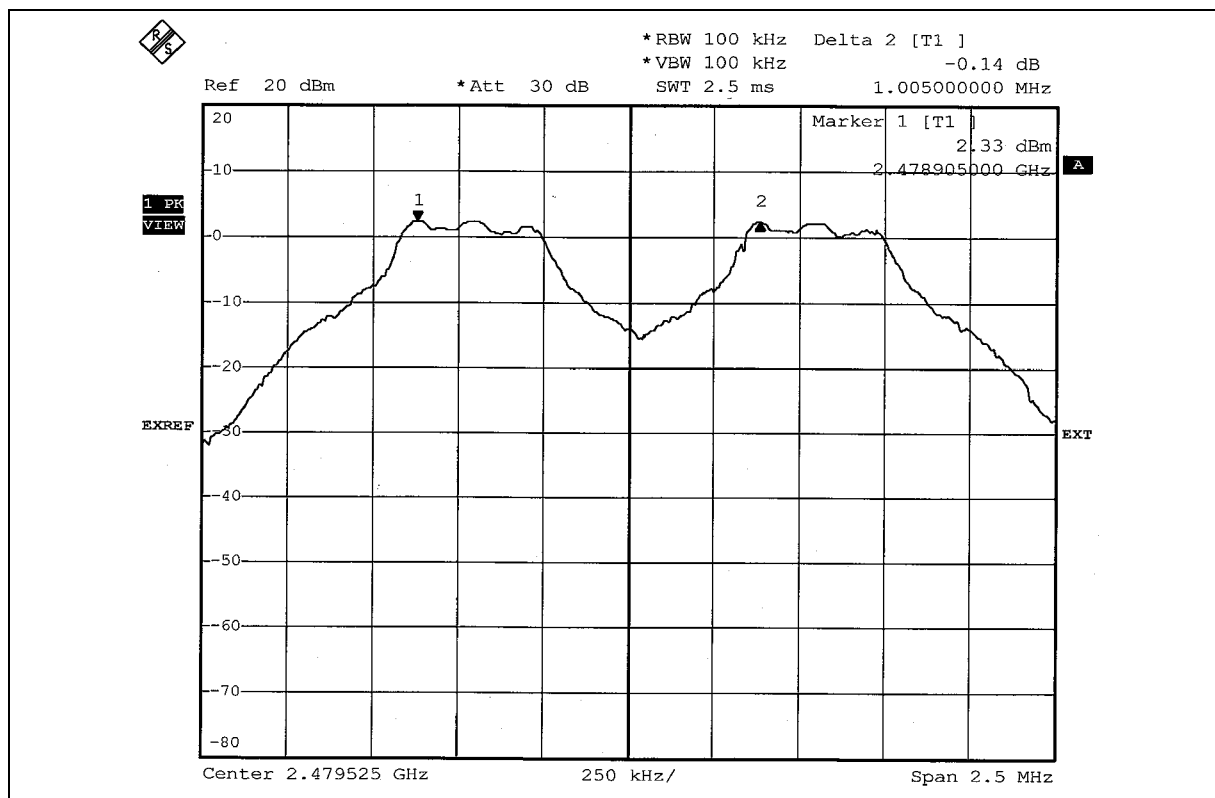



6.7 MAXIMUM PEAK OUTPUT POWER

6.7.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

6.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

6.7.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 1 MHz RBW and 3 MHz VBW.
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

6.7.4 DEVIATION FROM TEST STANDARD

No deviation

6.7.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

6.7.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.




6.7.7 TEST RESULTS

EUT	Mini PC	MODEL	P60
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	27deg. C, 63%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Long Chen


CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
0	2402	1.671	2.23	30	PASS
39	2441	1.884	2.75	30	PASS
78	2480	1.656	2.19	30	PASS



CH 0

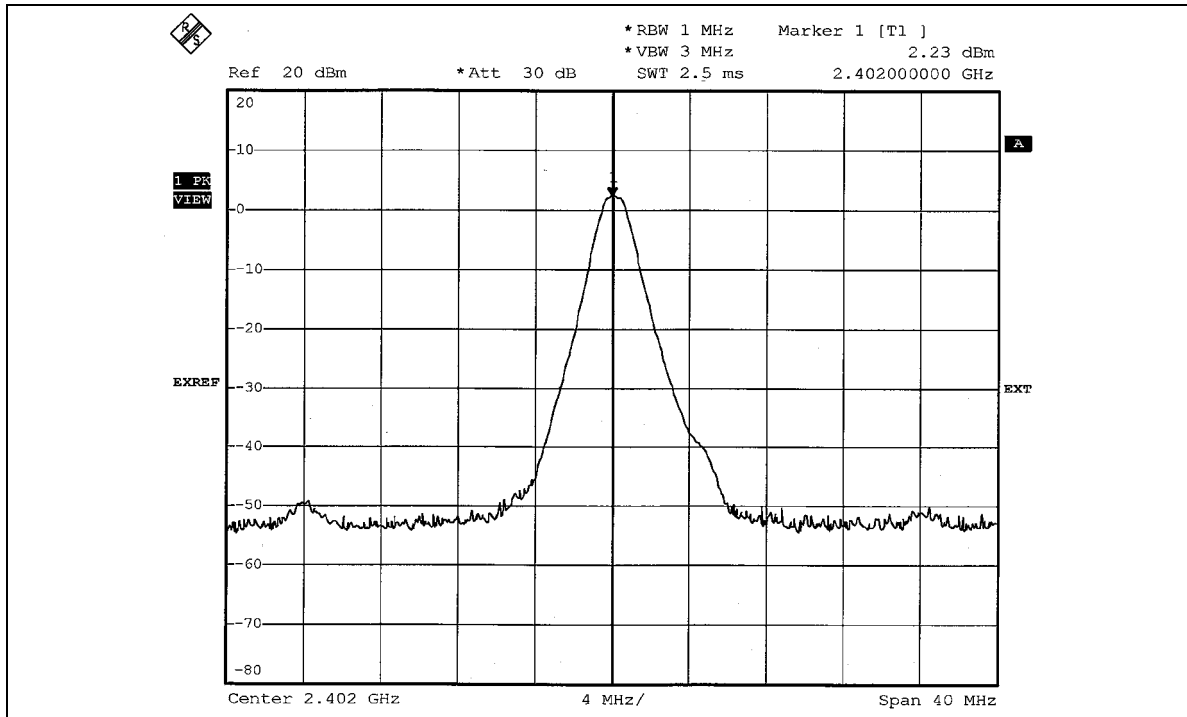


CH 39

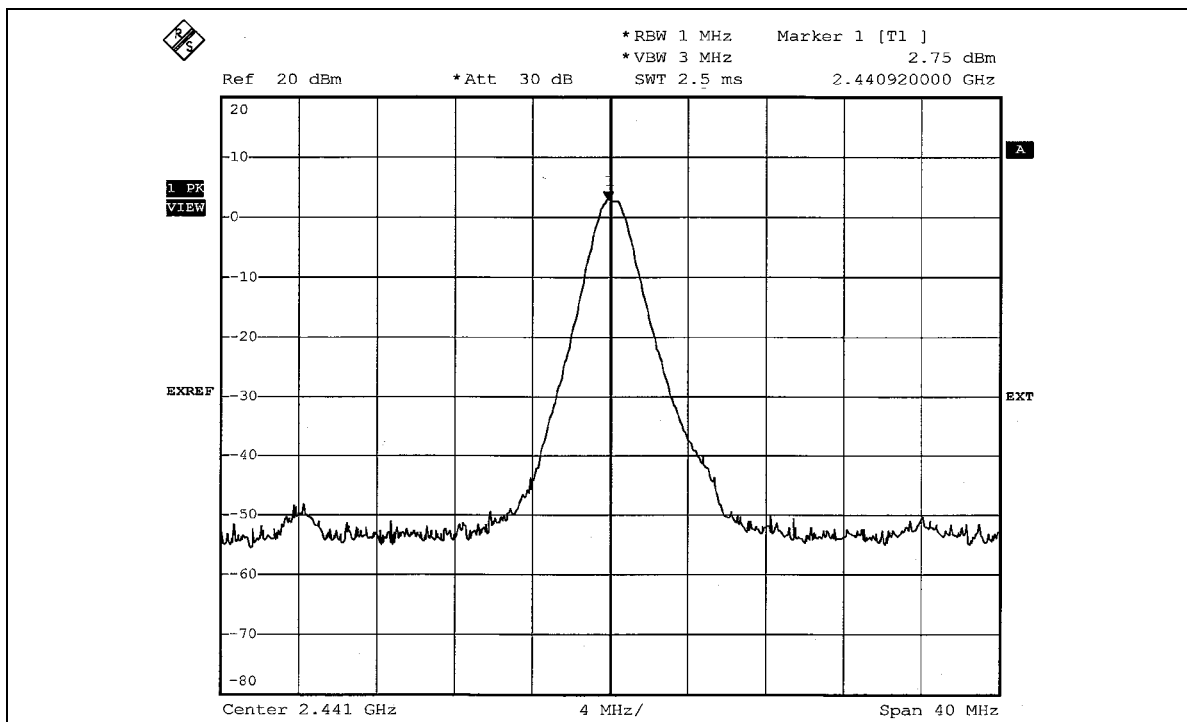



CH 78

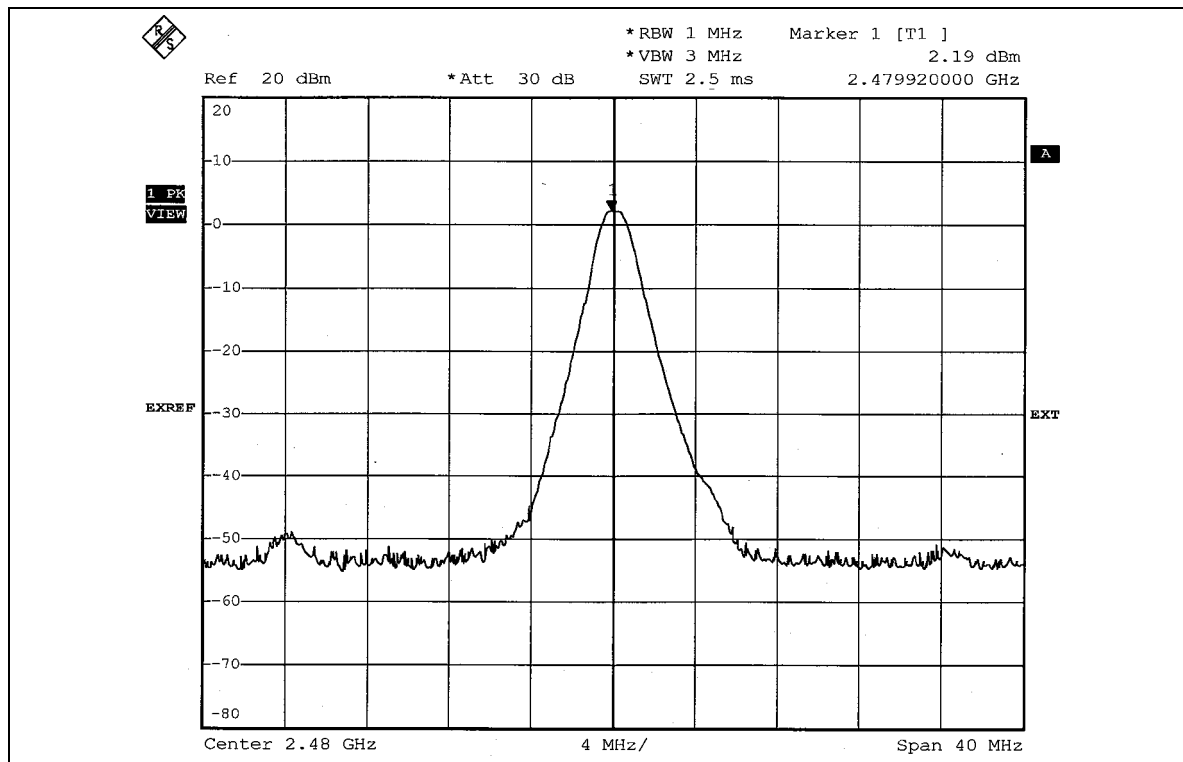



6.8 BAND EDGES MEASUREMENT

6.8.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz RBW).

6.8.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTES: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

6.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

6.8.4 DEVIATION FROM TEST STANDARD

No deviation.

6.8.5 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.



6.8.6 TEST RESULTS

The spectrum plots are attached on the following 4 images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

NOTE 1:



The band edge emission plot on page 158 shows 50.60dBc between carrier maximum power and local maximum emission in restrict band (2.3789GHz). The emission of carrier strength list in the test result of channel 0 at the item 6.2.7 is 91.94dBuV/m (Peak), so the maximum field strength in restrict band is $91.94-50.60=41.34$ dBuV/m, which is under 74 dBuV/m limit.



The band edge emission plot on page 158 shows 50.60dBc between carrier maximum power and local maximum emission in restrict band (2.3789GHz). The emission of carrier strength list in the test result of channel 0 at the item 6.2.7 is 61.94dBuV/m (Average), so the maximum field strength in restrict band is $61.94-50.60=11.34$ dBuV/m, which is under 54 dBuV/m limit.

NOTE 2:

The band edge emission plot on page 159 shows 49.59dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 78 at the item 6.2.7 is 92.28dBuV/m (Peak), so the maximum field strength in restrict band is $92.28-49.59=42.69$ dBuV/m, which is under 74 dBuV/m limit.

The band edge emission plot on page 159 shows 49.59dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 78 at the item 6.2.7 is 62.28dBuV/m (Average), so the maximum field strength in restrict band is $62.28-49.59=12.69$ dBuV/m, which is under 54 dBuV/m limit.

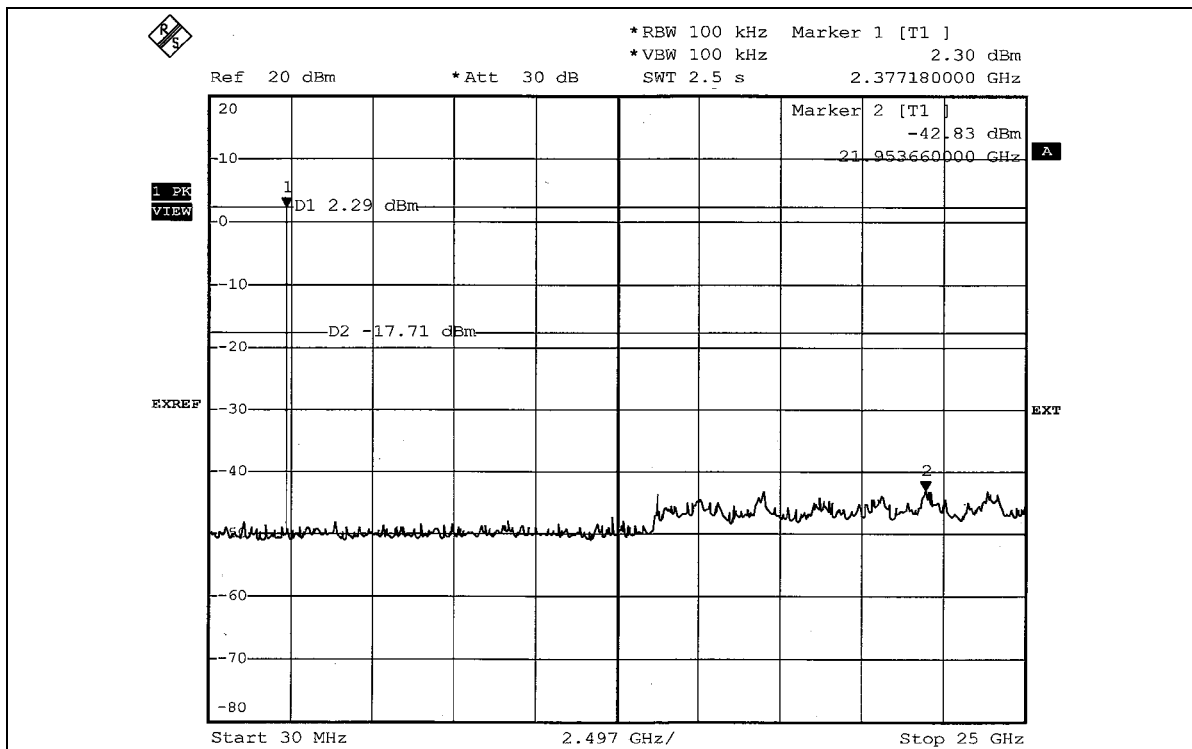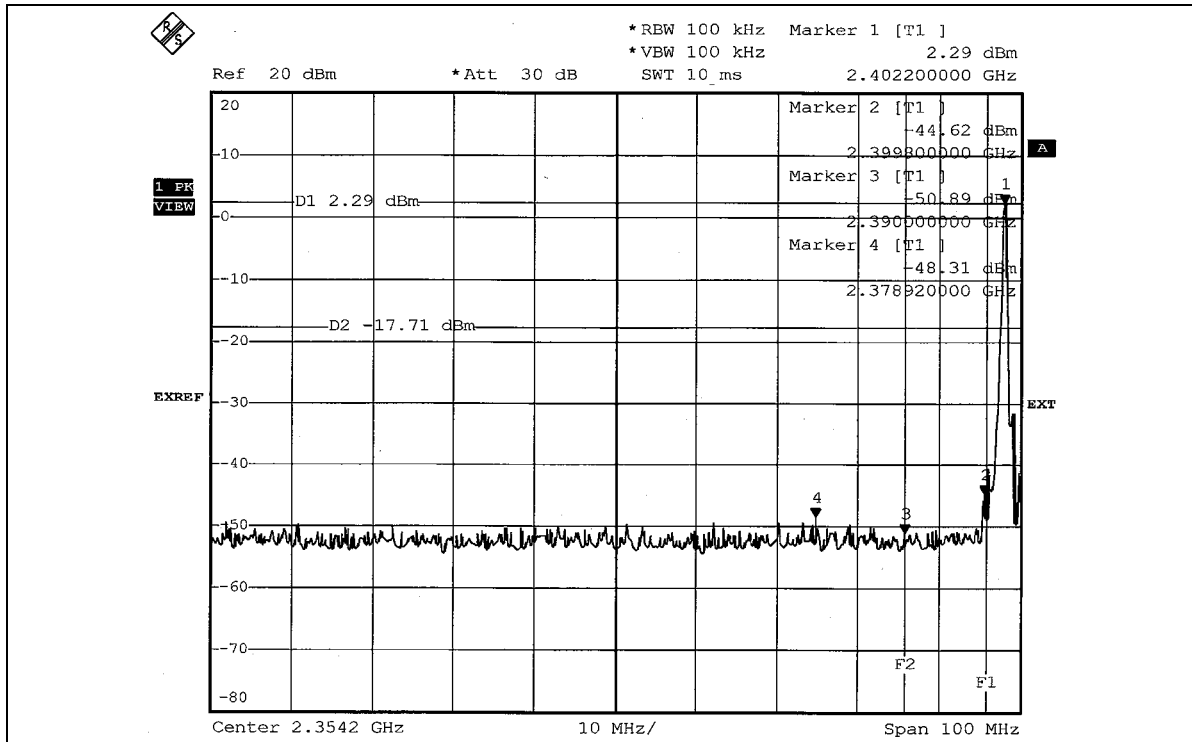

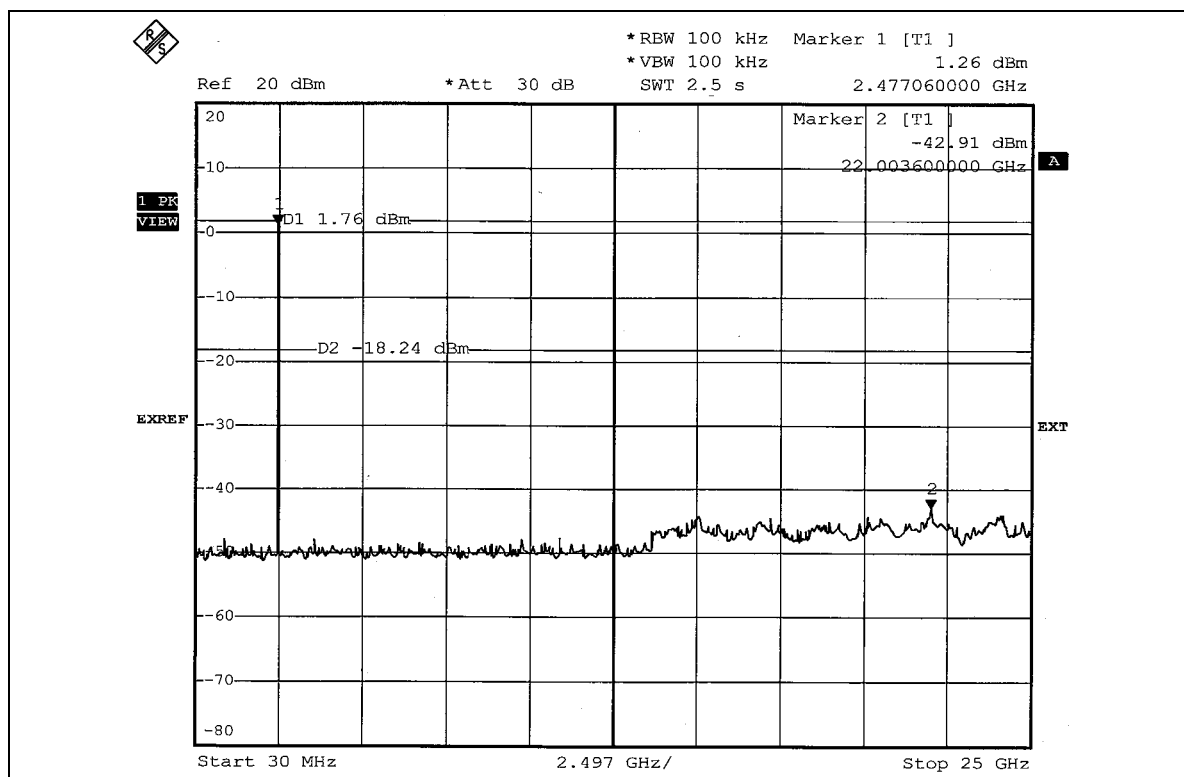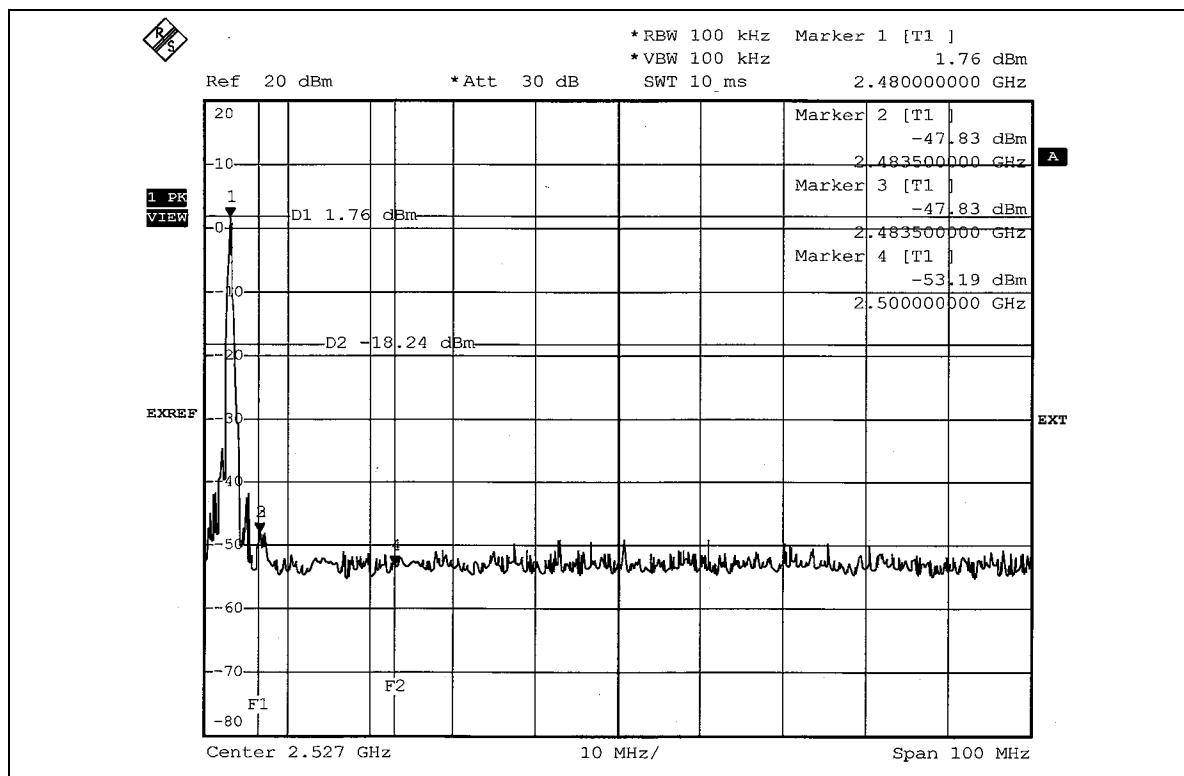



6.9 ANTENNA REQUIREMENT

6.9.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.9.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is PIFA antenna with UFL antenna connector. The maximum gain of this antenna is -2.88dBi .

7. PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST TEST MODE A




TEST MODE B



RADIATED EMISSION TEST TEST MODE A



TEST MODE B

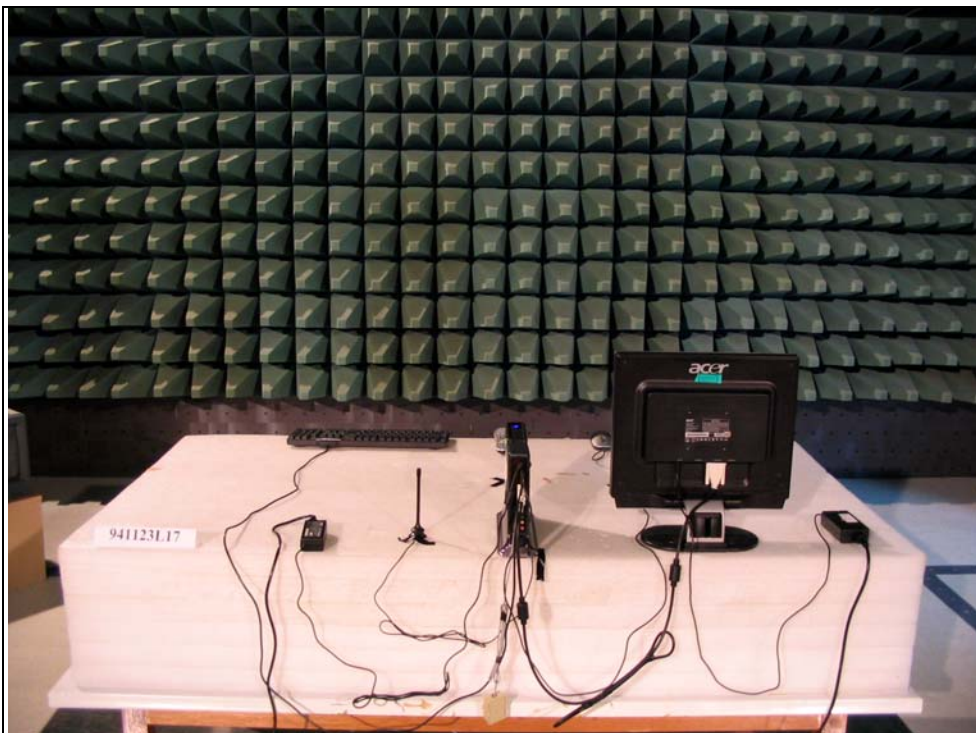



8. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Linko RF Lab.

Tel: 886-3-3270910

Fax: 886-3-3270892

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.