



America

**Choose certainty.
Add value.**

Report On

Application for Grant of Equipment Authorization of the
Kidde Residential and Commercial
CDX-135Z

FCC Part 15 Subpart C § 15.247
RSS 247 Issue 2, February 2017
RSS-Gen Issue 4, November 2014

Report No. TP72121497.100

April 2017



REPORT ON	Radio Testing of the Kidde Residential and Commercial CDX-135Z
TEST REPORT NUMBER	TP72121497.100
PREPARED FOR	Kidde Residential and Commercial 1394 S. 3 rd Street Mebane, NC 27302
CONTACT PERSON	Michael Richards Michael.Richards@KiddeUS.com
PREPARED BY	 _____ Steven Hoke Title: Senior EMC Engineer
APPROVED BY	 _____ Pete Walsh, NCE Authorized Signatory Title: Service Line Manager
DATED	<u>24. April 2017</u>

Revision History

TP72121497.100 Kidde Residential and Commercial CDX-135Z					
DATE	OLD REVISION	NEW REVISION	REASON	PAGES AFFECTED	APPROVED BY
24. April 2017	Initial Release				Pete Walsh



TABLE OF CONTENTS

Section	Page No
1	REPORT SUMMARY 5
1.1	Introduction 6
1.2	Brief Summary of Results 7
1.3	Product Information 8
1.4	EUT Test configuration 10
1.5	Deviations from the Standard 11
1.6	Modification Record 11
1.7	Test Methodology 11
1.8	Test Facility Location 11
1.9	Test Facility Registration 11
2	TEST DETAILS 12
2.1	Peak Output Power 13
2.2	Conducted Emissions 18
2.3	99% Emission Bandwidth 20
2.4	Minimum 6 dB RF Bandwidth 24
2.5	Out of Band Emissions - conducted 27
2.6	Band-Edge Compliance of RF Conducted Emissions 29
2.7	Spurious Radiated Emissions 30
2.8	Radiated Band Edge Measurements 41
2.9	Power Spectral Density 45
3	TEST EQUIPMENT USED 50
3.1	Test Equipment Used 51
3.2	Measurement Uncertainty 52
4	DIAGRAM OF TEST SETUP 54
4.1	Test Setup Diagram 55
5	ACCREDITATION, DISCLAIMERS AND COPYRIGHT 58
5.1	Accreditation, Disclaimers and Copyright 59

SECTION 1

REPORT SUMMARY

Radio Testing of the
Kidde Residential and Commercial
CDX-135Z



1.1 INTRODUCTION

The information contained in this report is intended to show verification of the Kidde Residential and Commercial model CDX-135Z to the requirements of FCC Part 15 Subpart C § 15.247, RSS-Gen, Issue 4, November 2014 and RSS 247 Issue 2, February 2017.

Objective	To perform Radio Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Kidde Residential and Commercial
Model Number(s)	CDX-135Z & SDX-135Z
FCC ID Number	SAK25609702
IC Number	7145A-25609702
Serial Number(s)	None.
Number of Samples Tested	3
Test Specification/Issue/Date	• FCC Part 15 Subpart C § 15.247 • RSS 247 Issue 2, February 2017 Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices. • RSS-Gen, Issue 4, November 2014 General Requirements for Compliance of Radio Apparatus. • 558074 D01 DTS Meas Guidance v03r05, April 08, 2016) Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247.
Start of Test	19. December 2016
Finish of Test	06. March 2017
Name of Engineer(s)	David "Chip" Foerstner
Related Document(s)	Supporting documents for EUT certification are separate exhibits.

1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC Part 15 Subpart C § 15.247 with cross-reference to the corresponding IC RSS standard is shown below.

Section	§15.247 Spec Clause	RSS	Test Description	Result	Comments/ Base Standard
2.1	§15.247(b)(3)	RSS-210 A8.4 (4)	Peak Output Power	Compliant	
2.2	§15.207(a)	RSS-Gen 8.8	Conducted Emissions	NA	NP
2.3		RSS-Gen 6.6	99% Emission Bandwidth	Compliant	
2.4	§15.247(a)(2)	RSS-210 A8.2(a)	Minimum 6 dB RF Bandwidth	Compliant	
2.5	§15.247(d)	RSS-210 A8.5	Out-of-Band Emissions - Conducted	NA	NP
2.6	§15.247(d)	RSS-210 A8.5	Band-edge Compliance of RF Conducted Emissions	NA	NP
2.7	§15.247(d)	RSS-210 A8.5	Spurious Radiated Emissions	Compliant	
2.7		RSS-Gen 7.1	Receiver Spurious Emissions	Compliant	
2.8	§15.247(d)	RSS-210 A8.5	Radiated Band Edge Measurements	Compliant	
2.9	§15.247(e)	RSS-210 A8.2(b)	Power Spectral Density for Digitally Modulated Device	Compliant	

NA – Not applicable NP – Not performed



1.3 PRODUCT INFORMATION

1.3.1 Technical Description

The Equipment Under Test (EUT) is a Kidde Residential and Commercial, Model CDX-135Z as shown in the photograph below. It is a wireless Smoke/CO Detector with Heat and Freeze Sensor.

Equipment Under Test



1.3.2 EUT General Description

EUT Description	Wireless Smoke Detector
Model Name	
Model Number(s)	CDX-135Z & SDX-135Z
Mode Verified	FSK
Capability	FSK
Primary Unit (EUT)	☐ Production ☒ Pre-Production ☐ Engineering
Antenna Type	Embedded

1.3.3 Maximum Conducted Output Power (Peak)

Mode	Frequency Range (MHz)	Output Power (dBm)	Output Power (mW)
FSK	909 - 925	8.9	7.76

1.4 EUT TEST CONFIGURATION

1.4.1 Test Configuration Description

Test Configuration	Description
A	Radiated emissions test configuration. EUT transmitting through the integral antenna.

1.4.2 EUT Exercise Software

The manufacturer provided the samples configured below.

- (3) preconfigured samples at 909, 916 & 925 MHz transmitting constant CW.
- (3) preconfigured samples at 909, 916 & 925 MHz transmitting constant normal modulation.
- (3) preconfigured samples at 909, 916 & 925 MHz not transmitting.

1.4.3 Support Equipment and I/O cables

None were required.

1.4.4 Worst Case Configuration

For radiated measurements, the EUT was investigated in all orthogonal directions. Testing was completed with the EUT in a horizontal position, which was the worst case.

Mode	Channel	Data Rate
FSK	Mid channel	100 kHz

1.5 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standards or test plan were made during testing.

1.6 MODIFICATION RECORD

Description of Modification	Modification Fitted By	Date Modification Fitted
Serial Number: None		
N/A		

The table above details modifications made to the EUT during the test programme. The modifications incorporated during each test (if relevant) are recorded on the appropriate test pages.

1.7 TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. All three orthogonal positions were investigated and the test data reflects the worst case.

For conducted and radiated emissions the equipment under test (EUT) was configured to measure its highest possible emission level. This level was based on the maximized cable configuration from exploratory testing per ANSI C63.10-2013.

1.8 TEST FACILITY LOCATION

1.8.1 TÜV SÜD America Inc. (Tampa)

5610 W. Sligh Ave., Suite 100, Tampa, FL 33634 Phone: 813 284 2715 FAX: 813-413 3813

1.9 TEST FACILITY REGISTRATION

1.9.1 FCC – Registration No

The TÜV SÜD America Inc. (Tampa), test facility has been registered with the Federal Communication Commission as an ISO/IEC 17025 accredited test laboratory and assigned the designation number US1063.

1.9.2 Innovation, Science and Economic Development Canada Registration

The TÜV SÜD America Inc. (Tampa), test facility has been registered with Innovation, Science and Economic Development Canada and assigned the site number 2087A-2.

SECTION 2

TEST DETAILS

Radio Testing of the
Kidde Residential and Commercial
CDX-135Z



2.1 PEAK OUTPUT POWER

2.1.1 Specification Reference

Part 15 Subpart C §15.247(b)(3)

2.1.2 Standard Applicable

(3) For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one watt limit can be based on a measurement of the maximum conducted output power. Maximum conducted output power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

2.1.3 Equipment Under Test and Modification State

Serial No: None / Test Configuration A

2.1.4 Date of Test/Initial of test personnel who performed the test

02. & .06 March 2017 / DF

2.1.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.6 Environmental Conditions

Test performed at TÜV SÜD America Inc. Tampa facility

Ambient Temperature	22 – 24 °C
Relative Humidity	48 – 52%

2.1.7 Additional Observations

- This is a radiated test at a 3-meter distance that was used to calculate the (Maximum [peak] conducted output power.
- Test methodology is per Clause 9.1.1 of KDB 558074 D01 (DTS Meas Guidance v03r05, April 08, 2016). All conditions under this Clause were satisfied.
- Radiated emissions measurements are allowed for demonstrating compliance to the conducted emission requirements per section 3.0 of KDB 558074 D01 (DTS Meas Guidance v03r05, April 08, 2016).

2.1.8 Test Results

Frequency MHz	Modulation	Measured Peak Field Strength dBμV/m @ 3M	Calculated EIRP (dBm)	Calculated EIRP (mW)
909	FSK @ +/- 200 kHz @100 kHz	104.0	8.8	7.59
916		104.1	8.9	7.76
925		103.0	7.8	6.03

Equivalent conducted output power = EIRP = FS + (20 log d) – 104.7

2.1.9 Sample Test Plots – Amplitudes are in dBμV/m at a (3) Meter Distance

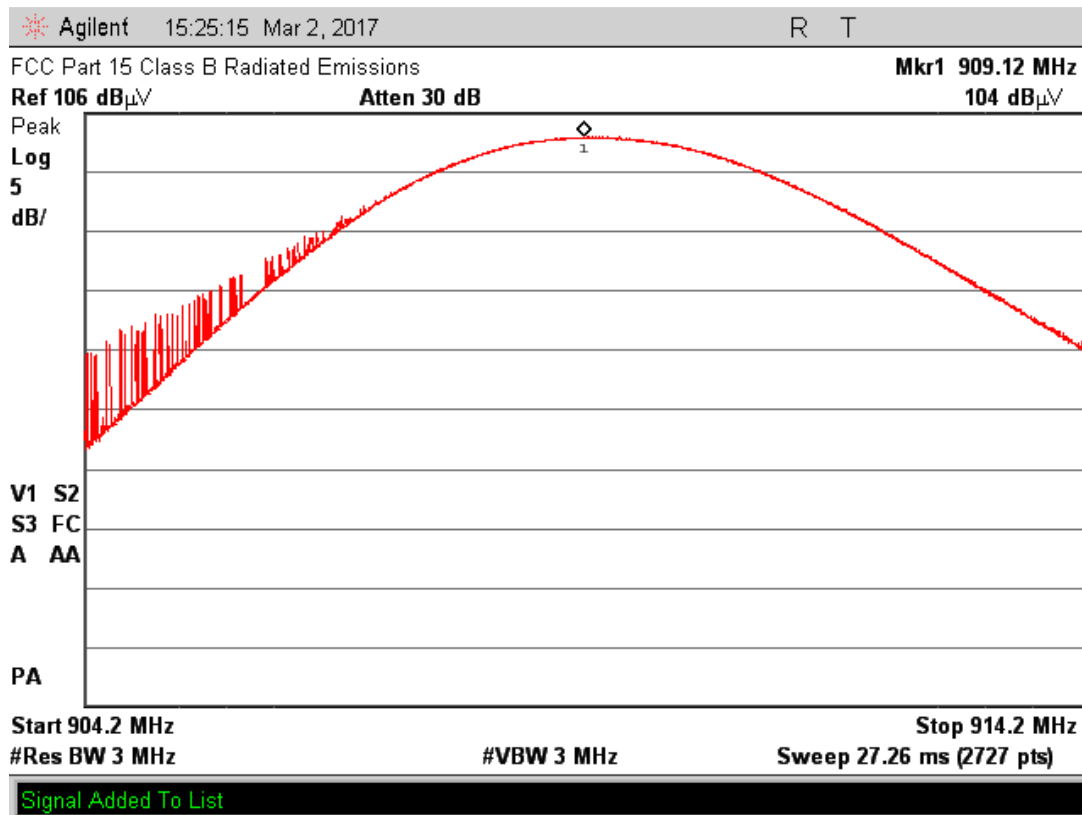


Figure 2.1.9-1 - Low Channel Peak Power

Notes:

ANSI C63.10-2013 clause 9.5

$$\text{EIRP} = E + (20 \log d) - 104.7$$

$$\text{EIRP} = 104.1 + 9.54 - 104.7$$

$$\text{EIRP} = 8.8 \text{ dBm}$$

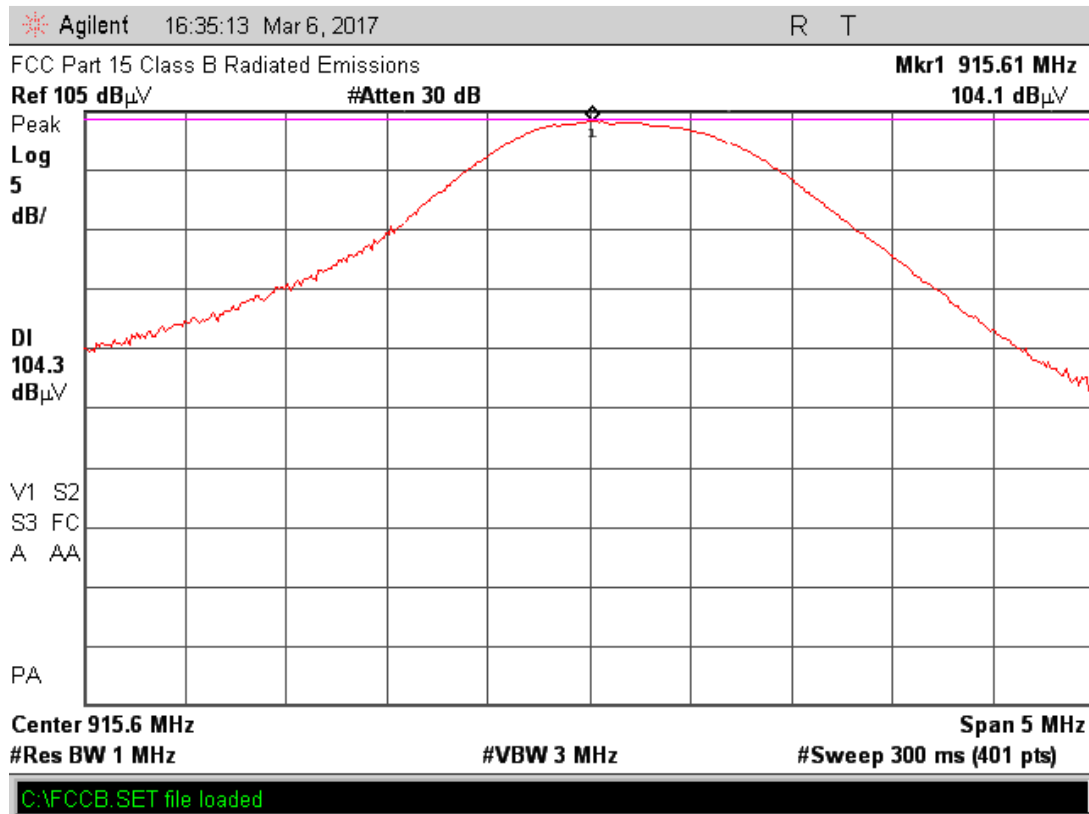


Figure 2.1.9-2 - Mid Channel Peak Power

Notes:

ANSI C63.10:2013 clause 9.5

$$\text{EIRP} = E + (20 \log d) - 104.7$$

$$\text{EIRP} = 104.1 + 9.54 - 104.7$$

$$\text{EIRP} = 8.9 \text{ dBm}$$

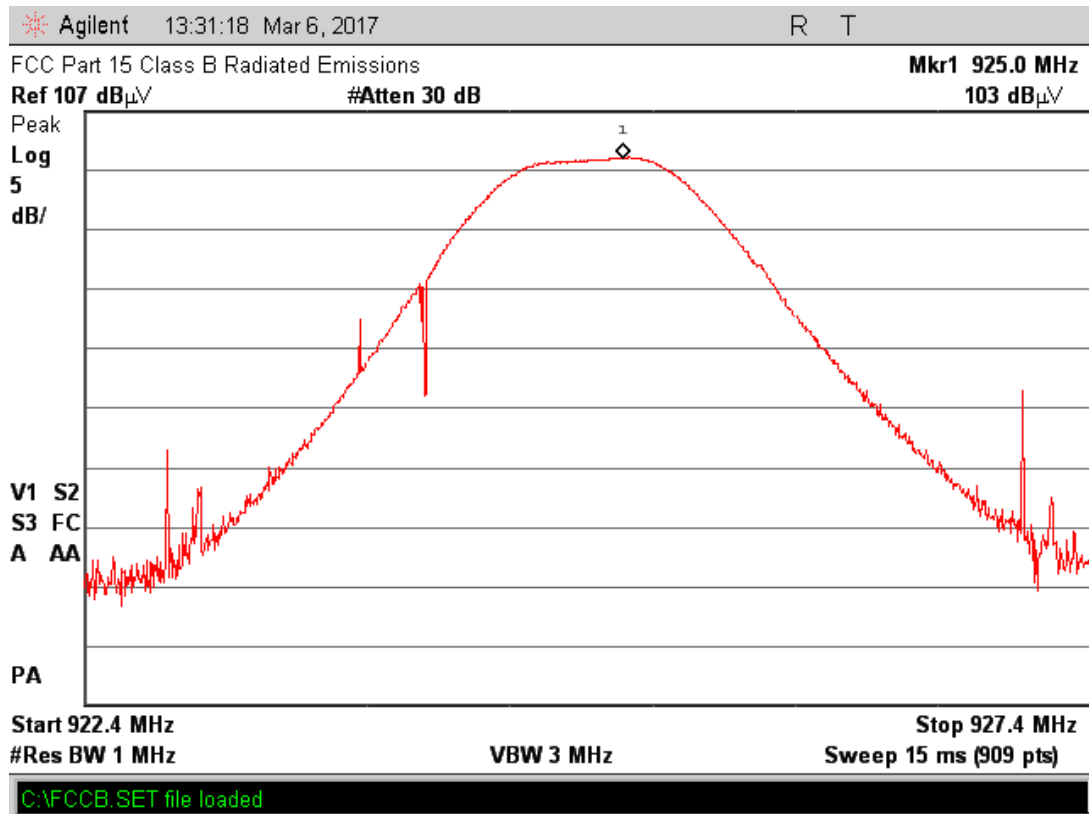


Figure 2.1.9-3 - High Channel Peak Power

Notes:

ANSI C63.10:2013 clause 9.5

$$\text{EIRP} = E + (20 \log d) - 104.7$$

$$\text{EIRP} = 103.0 + 9.54 - 104.7$$

$$\text{EIRP} = 7.8 \text{ dBm}$$

2.2 CONDUCTED EMISSIONS

2.2.1 Specification Reference

Part 15 Subpart C §15.207(a)

2.2.2 Standard Applicable

An intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

**Decreases with the logarithm of the frequency.*

2.2.3 Equipment Under Test and Modification State

Serial No: none /Test Configuration B

2.2.4 Date of Test/Initial of test personnel who performed the test

Not applicable – battery operated

2.2.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.6 Environmental Conditions

Test performed at TÜV SÜD America Inc. Tampa facility

Ambient Temperature	22 – 24 °C
Relative Humidity	48 – 52%

2.2.7 Additional Observations

2.2.1 Sample Computation (Conducted Emission – Quasi Peak)

Measuring equipment raw measurement (dBμV) @ 150kHz			30.0
Correction Factor (dB)	TEMC00002 - LISN	0.03	0.11
	Cable 1	0.08	
Reported QuasiPeak Final Measurement (dBμV) @ 150kHz			30.11

2.2.2 Test Results

Not applicable – battery operated

2.3 99% Emission Bandwidth

2.3.1 Specification Reference

RSS-Gen Clause 6.6

2.3.2 Standard Applicable

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth.

When the occupied bandwidth limit is not stated in the applicable RSS or reference measurement method, the transmitted signal bandwidth shall be reported as the 99% emission bandwidth, as calculated or measured.

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- • The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.
- • The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

Note: Video averaging is not permitted.

A peak, or peak hold, may be used in place of the sampling detector as this may produce a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold may be necessary to determine the occupied bandwidth if the device is not transmitting continuously.

The trace data points are recovered and are directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded.

The difference between the two recorded frequencies is the 99% occupied bandwidth.

2.3.3 Equipment Under Test and Modification State

Serial No: none / Test Configuration A

2.3.4 Date of Test/Initial of test personnel who performed the test

02. – 06. March 2017 / DF

2.3.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.3.6 Environmental Conditions

Test performed at TÜV SÜD America Inc. Tampa facility

Ambient Temperature 22 – 24 °C

Relative Humidity 48 – 52%

2.3.7 Additional Observations

- This is a radiated test.
- Span is wide enough to capture the channel transmission.
- RBW is 5% of the span.
- VBW is 3X RBW.
- Sweep is auto.
- Detector is peak.

2.3.8 Test Results (For reporting purposes only)

Mode	Channel	Measured 99% Bandwidth (kHz)
FSK	909	802.6
	916	876.0
	925	835.0

2.3.9 Test Results Plots

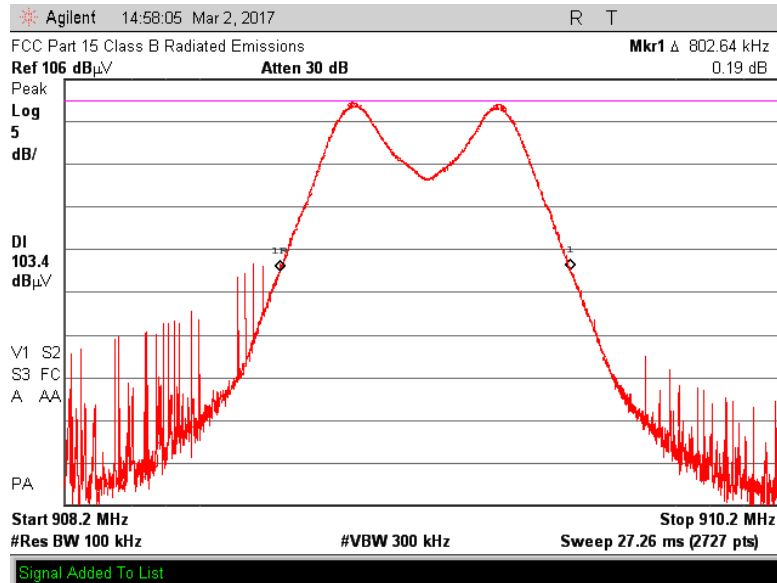


Figure 2.3.9-1 - Low Channel Bandwidth

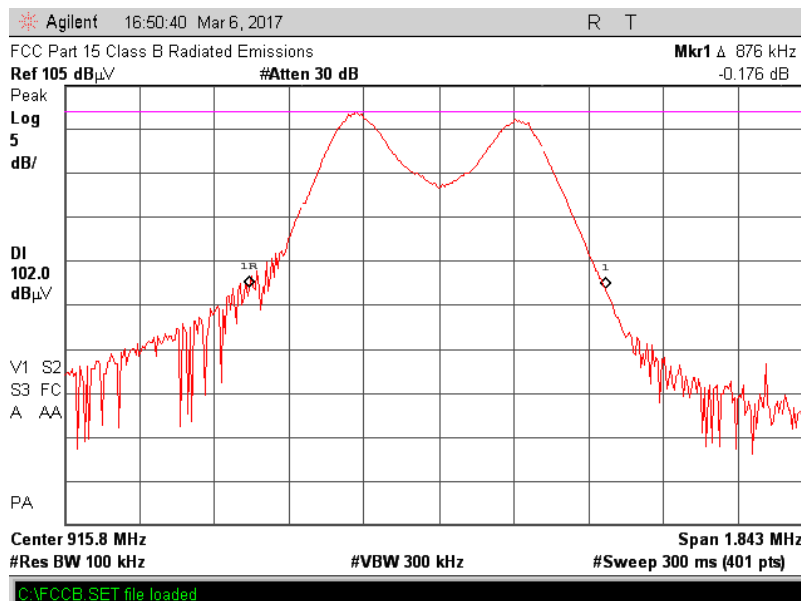


Figure 2.3.9-2 - Mid Channel Bandwidth

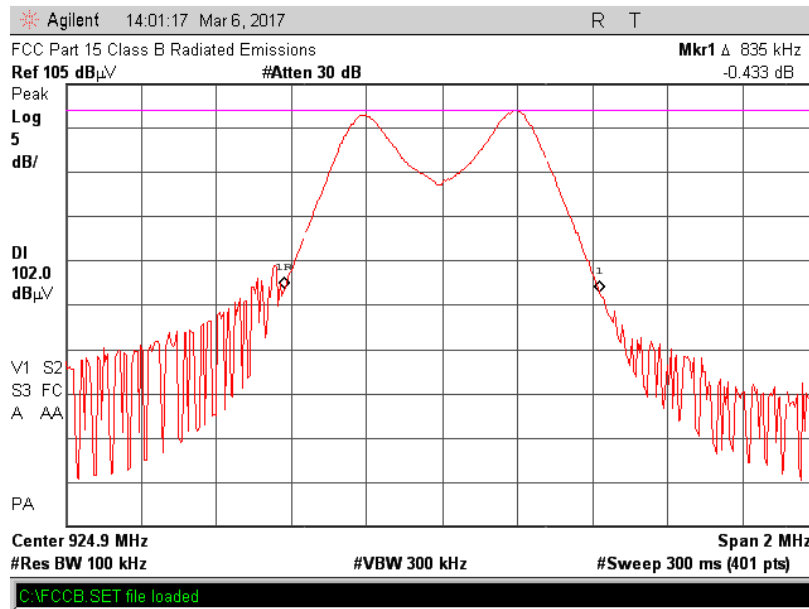


Figure 2.3.9-3 - High Channel Bandwidth

2.4 MINIMUM 6 dB RF BANDWIDTH

2.4.1 Specification Reference

Part 15 Subpart C §15.247(a)(2)

2.4.2 Standard Applicable

(2) Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

2.4.3 Equipment Under Test and Modification State

Serial No: none / Test Configuration A

2.4.4 Date of Test/Initial of test personnel who performed the test

19. December 2016 /DF

2.4.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.4.6 Environmental Conditions

Test performed at TÜV SÜD America Inc. Tampa facility

Ambient Temperature	22 – 24 °C
Relative Humidity	48 – 52%

2.4.7 Additional Observations

- This is a radiated test.
- Span is wide enough to capture the channel transmission.
- RBW is set to 100 kHz
- VBW is $\geq 3X$ RBW.
- Sweep is auto.
- Detector is peak.

2.4.8 Test Results

Mode	Channel	Measured Bandwidth (MHz)	Minimum Bandwidth (MHz)	Compliance
FSK	909	.705	0.500	Complies
	916	.695	0.500	Complies
	925	.695	0.500	Complies

2.4.9 Test Results Plots

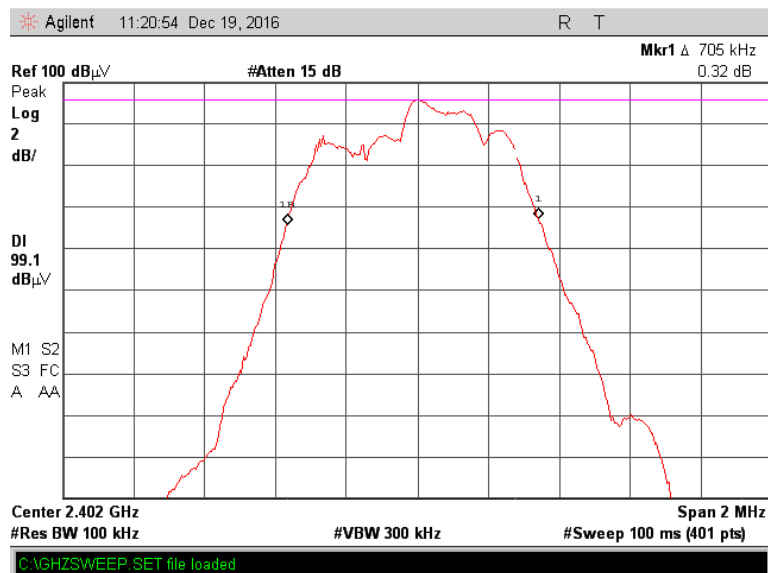


Figure 2.4.9-1 - Low Channel 6 dB Bandwidth

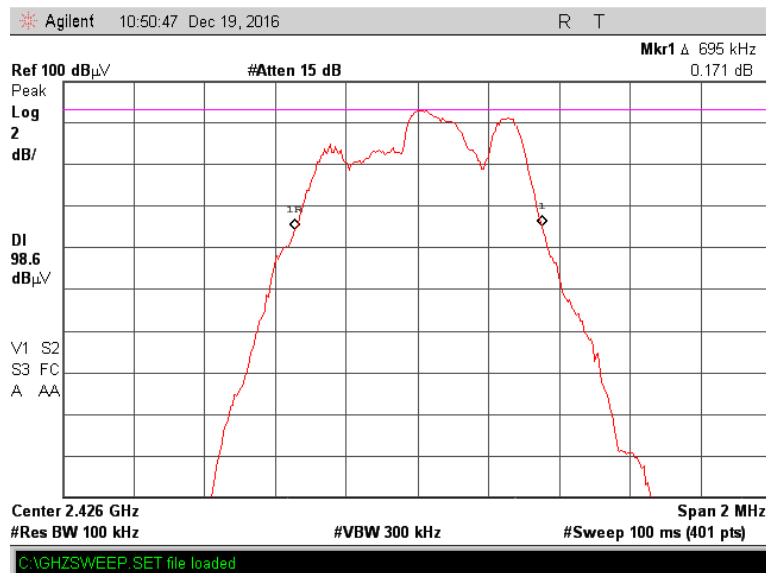


Figure 2.4.9-2 - Mid Channel 6 dB Bandwidth



Figure 2.4.9-3 - High Channel 6 dB Bandwidth

2.5 OUT OF BAND EMISSIONS - CONDUCTED

2.5.1 Specification Reference

Part 15 Subpart C §15.247(d)

2.5.2 Standard Applicable

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

2.5.3 Equipment Under Test and Modification State

Serial No: None / Test Configuration A

2.5.4 Date of Test/Initial of test personnel who performed the test

Not performed – this product has an integral antenna only.

2.5.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.5.6 Environmental Conditions

Test performed at TÜV SÜD America Inc. Tampa facility.

Ambient Temperature	22 – 24 °C
Relative Humidity	48 – 52%

2.5.7 Additional Observations

- This is a radiated test.
- RBW is 100kHz.VBW is 3X RBW.
- Sweep is auto. Detector is peak. Trace is max hold.
- Sweep points set to maximum.
- Spectrum was searched from 30 MHz up to 26.5GHz.



2.5.8 Test Results Plots

None taken as the alternative radiated spurious emissions test was performed. See results in Section 2.7.

2.6 BAND-EDGE COMPLIANCE OF RF CONDUCTED EMISSIONS

2.6.1 Specification Reference

Part 15 Subpart C §15.247(d)

2.6.2 Standard Applicable

See 2.7.2.

2.6.3 Equipment Under Test and Modification State

Serial No: none / Test Configuration A

2.6.4 Date of Test/Initial of test personnel who performed the test

Not Performed – this product has an integral antenna only.

2.6.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.6.6 Environmental Conditions

Test performed at TÜV SÜD America Inc. Tampa facility

Ambient Temperature	22 – 24 °C
Relative Humidity	48 – 52%

2.6.7 Additional Observations

- This is a radiated test.
- RBW is 100kHz. VBW is 3X RBW.
- Sweep is auto. Detector is peak. Trace is max hold.
- Span was set to encompass the band-edge frequency and the peak of the emission.
- Using Marker function, peak of the emission was determined and the delta to the band-edge frequency measured.
- Band-edges were verified ≤ 30 dBc (worst-case).

2.6.8 Test Results

Complies. See attached plots.

2.7 SPURIOUS RADIATED EMISSIONS

2.7.1 Specification Reference

Part 15 Subpart C §15.247(d)

2.7.2 Standard Applicable

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

2.7.3 Equipment Under Test and Modification State

Serial No: None / Test Configuration B

2.7.4 Date of Test/Initial of test personnel who performed the test

20. December 2016 / DF

2.7.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.7.6 Environmental Conditions

Test performed at TÜV SÜD America Inc. Tampa facility.

Ambient Temperature	22 – 24 °C
Relative Humidity	48 – 52%

2.7.7 Additional Observations

- This is a radiated test at a 3-meter distance. The spectrum was searched from 30MHz to the 10th harmonic.
- There are no emissions found that do not comply to the restricted bands defined in FCC Part 15 Subpart C, 15.205 or Part 15.247(d).

- Only noise floor measurements observed above 13 GHz.
- Measurement was done using EMC32 automated software. Reported level is the actual level with all the correction factors factored in. Correction Factor column is for informational purposes only. See Section 2.7.8 for sample computation.

2.7.8 Sample Computation (Radiated Emission)

Measuring equipment raw measurement (dBμV) @ 30 MHz			20.0
Correction Factor (dB)	Cable 2	0.24	18.94
	TEMC00011 (antenna)	18.70	
Reported QuasiPeak Final Measurement (dBμV/m) @ 30MHz			38.94

2.7.9 Test Results

See attached plots.

2.7.10 Test Results Below 1GHz (transmit mode – 909 MHz)

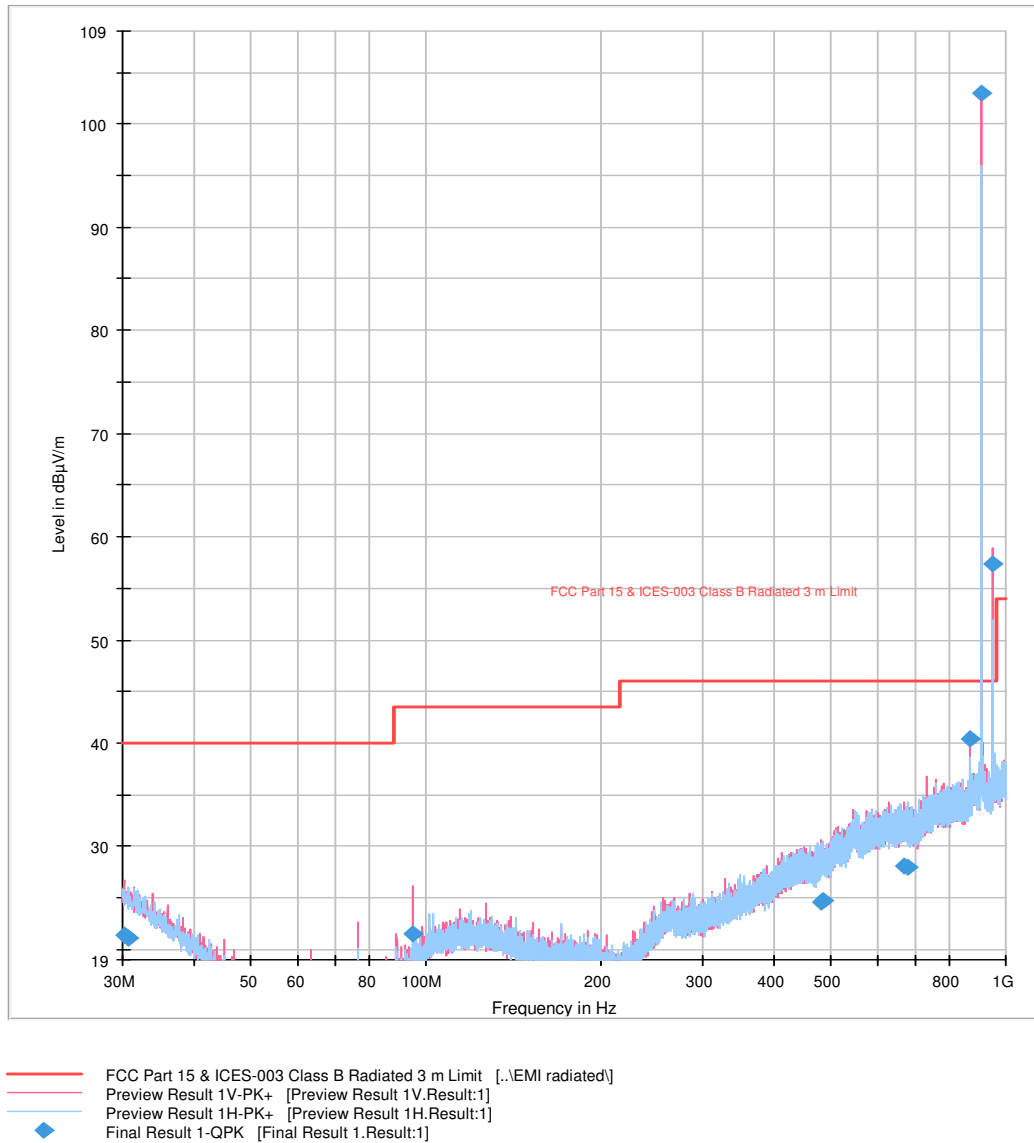


Figure 2.7.10-1 – 909 MHz Spurious Emissions Plot

Table 2.7.10-1 - Quasi Peak Detector Data

Frequency (MHz)	MaxPeak (dBμV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
30.120000	21.4	361.0	V	284.0	24.9	62.7	84.1
30.680000	21.1	300.0	H	46.0	24.5	63.0	84.1
94.920000	21.5	149.0	V	100.0	16.5	62.6	84.1
479.720000	24.6	294.0	H	180.0	25.8	59.5	84.1
484.520000	24.8	189.0	V	91.0	25.9	59.3	84.1
668.800000	28.1	390.0	V	355.0	28.5	56.0	84.1
675.440000	27.9	294.0	V	60.0	28.3	56.2	84.1
867.240000	40.4	200.0	V	-5.0	30.0	43.7	84.1
951.600000	57.3	100.0	V	-1.0	30.9	26.8	84.1
909.400000	103.0	133.0	V	-1.0	Fundamental		

2.7.11 Test Results Below 1GHz (transmit mode – 915 MHz)

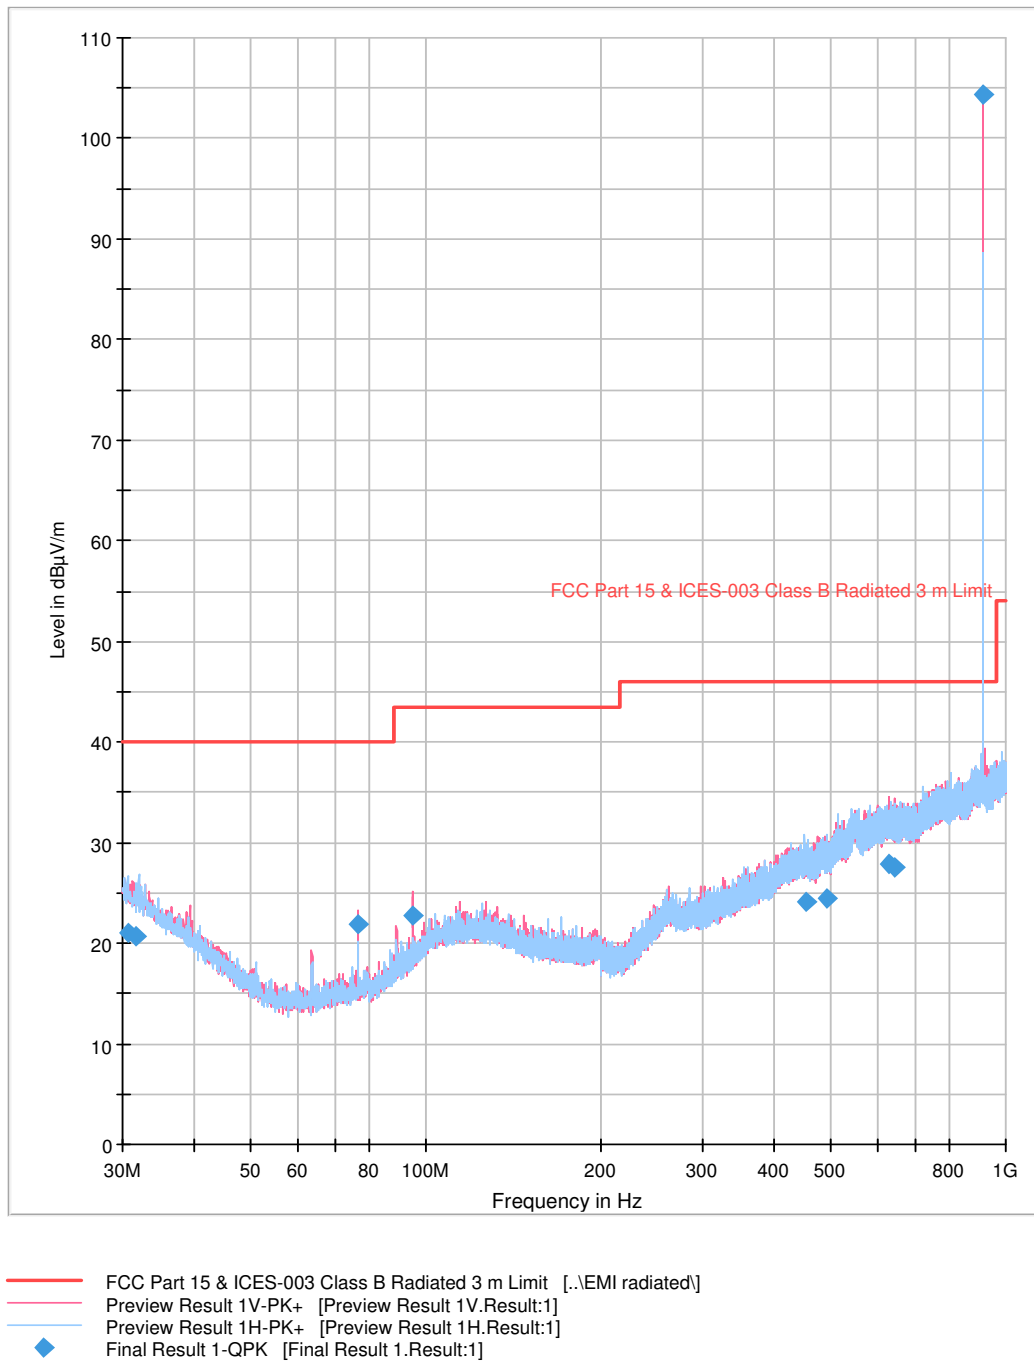


Figure 2.7.11-1 – 915 MHz Spurious Emissions Plot

Table 2.7.11-1 - Quasi Peak Detector Data

Frequency (MHz)	MaxPeak (dBμV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
30.720000	21.1	138.0	V	271.0	24.4	63.0	84.1
31.560000	20.7	399.0	V	356.0	24.0	63.4	84.1
76.280000	22.0	312.0	V	315.0	13.2	62.1	84.1
94.640000	22.8	137.0	V	340.0	16.4	61.3	84.1
451.160000	24.1	205.0	V	45.0	25.3	60.0	84.1
493.240000	24.5	234.0	V	91.0	25.5	59.6	84.1
627.880000	27.9	400.0	H	270.0	28.3	56.2	84.1
644.080000	27.6	340.0	H	338.0	28.0	56.5	84.1
915.960000	104.1	100.0	V	0.0	Fundamental		

2.7.12 Test Results Below 1GHz (transmit mode – 925 MHz)

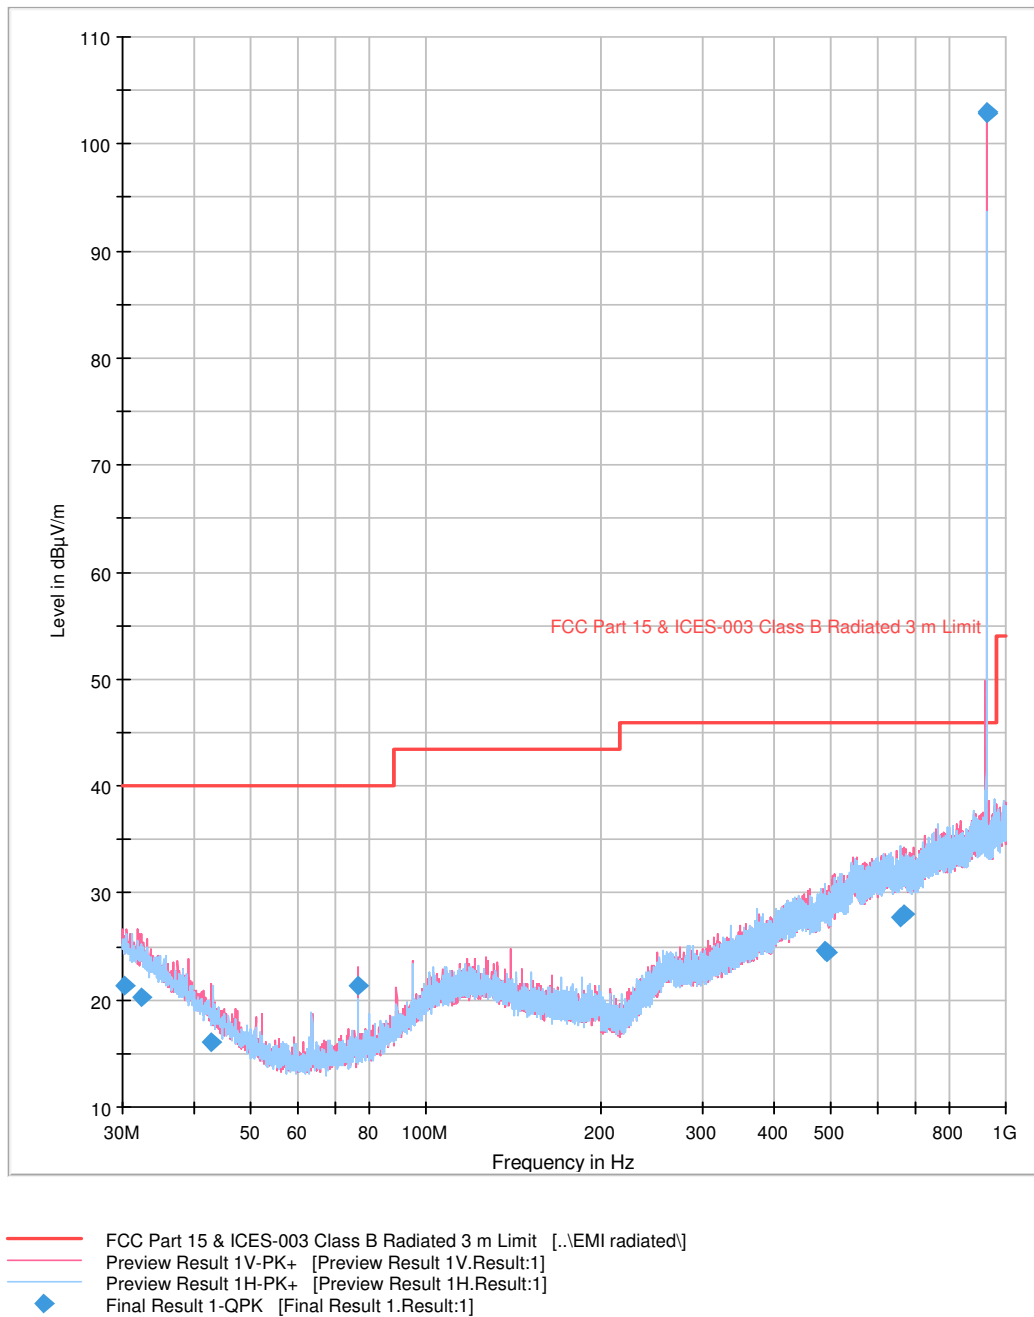


Figure 2.7.12-1 – 925 MHz Spurious Emissions Plot

Table 2.7.12-1 - Quasi Peak Detector Data

Frequency (MHz)	MaxPeak (dBμV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
30.160000	21.4	271.0	V	180.0	24.8	62.7	84.1
32.280000	20.3	372.0	H	45.0	23.6	63.8	84.1
42.600000	16.0	350.0	H	115.0	17.7	68.1	84.1
76.280000	21.3	289.0	V	73.0	13.2	62.8	84.1
487.600000	24.6	398.0	H	46.0	25.7	59.5	84.1
489.760000	24.5	296.0	V	45.0	25.5	59.6	84.1
655.720000	27.7	395.0	V	279.0	28.1	56.4	84.1
668.680000	28.1	395.0	V	315.0	28.5	56.0	84.1
925.040000	102.9	100.0	V	0.0	Fundamental		

2.7.13 Test Results Above 1GHz

Table 2.7.13-1 – Radiated Emissions Results for the Low Channel

Transmit Frequency 909 MHz						
Freq.		Field Strength		Delta	Restricted	POL
	AVG/PEAK	3 Meter Distance	Limit		Band	H/V
MHz	Detector	dBuV/m	dBuV/m	dB	Yes/No	
1818.72	PEAK	56.8	74	17.2	NO	Horz
1818.72	AVG	45.6	54	8.4	NO	Horz
2728	PEAK	53.2	74	20.8	YES	Horz
2728	AVG	41.6	54	12.4	YES	Horz
3637.4	PEAK	57	74	17	YES	Horz
3637.4	AVG	45.6	54	8.4	YES	Horz
4546.8	PEAK	49.1	74	24.9	YES	Horz
4546.8	AVG	39	54	15	YES	Horz
5456.16	PEAK	57.6	74	16.4	YES	Horz
5456.16	AVG	46	54	8	YES	Horz
6365.5	PEAK	60.2	74	13.8	NO	Horz
6365.5	AVG	49.1	54	4.9	NO	Horz
7274.88	PEAK	53.6	74	20.4	YES	Vert
7274.88	AVG	41.9	54	12.1	YES	Vert
8184.24	PEAK	54.3	74	19.7	YES	Horz
8184.24	AVG	43.4	54	10.6	YES	Horz
9093.6	PEAK	48.8	74	25.2	YES	Vert
9093.6	AVG	40	54	14	YES	Vert
RBW=1 MHz, VBW=3 MHz						

Notes:

The margin computed in the Delta column was the difference between the general field strength limit and the measured result irrespective of whether or not the emission fell in a restricted band. All spurious emissions were greater than 30 dB below the fundamental.

Table 2.7.13-2 – Radiated Emissions Results for the Mid Channel

Transmit Frequency 916 MHz						
Freq.		Field Strength		Delta	Restricted	POL
		3 Meter Distance	Limit		Band	H/V
MHz		dBuV/m	dBuV/m	dB	Yes/No	
1831.9	PEAK	57.5	74	-16.5	NO	Horz
1831.9	AVG	45.2	54	-8.8	NO	Horz
2747.8	PEAK	50.5	74	-23.5	YES	Horz
2747.8	AVG	39.1	54	-14.9	YES	Horz
3663.8	PEAK	54.5	74	-19.5	YES	Horz
3663.8	AVG	42.6	54	-11.4	YES	Horz
4579.7	PEAK	48	74	-26	YES	Horz
4579.7	AVG	39	54	-15	YES	Horz
5495.7	PEAK	59.2	74	-14.8	NO	Horz
5495.7	AVG	47.1	54	-6.9	NO	Horz
6411.6	PEAK	55.3	74	-18.7	NO	Horz
6411.6	AVG	43	54	-11	NO	Horz
7327.6	PEAK	55.4	74	-18.6	YES	Vert
7327.6	AVG	44.1	54	-9.9	YES	Vert
8243.5	PEAK	49.3	74	-24.7	YES	Horz
8243.5	AVG	40	54	-14	YES	Horz
9159.5	PEAK	46	74	-28	YES	Vert
9159.5	AVG	40	54	-14	YES	Vert
RBW=1 MHz, VBW=3 MHz						

Notes:

The margin computed in the Delta column was the difference between the general field strength limit and the measured result irrespective of whether or not the emission fell in a restricted band. All spurious emissions were greater than 30 dB below the fundamental.

Table 2.7.13-3 – Radiated Emissions Results for the High Channel

Transmit Frequency 925 MHz						
Freq.		Field Strength		Delta	Restricted	POL
		3 Meter Distance	Limit		Band	H/V
MHz		dBuV/m	dBuV/m	dB	Yes/No	
1850.14	PEAK	56.7	74	-17.3	NO	Horz
1850.14	AVG	45.9	54	-8.1	NO	Horz
2775.21	PEAK	49.8	74	-24.2	YES	Horz
2775.21	AVG	38	54	-16	YES	Horz
3700.28	PEAK	53.5	74	-20.5	YES	Horz
3700.28	AVG	42.8	54	-11.2	YES	Horz
4625.35	PEAK	47.8	74	-26.2	YES	Horz
4625.35	AVG	39	54	-15	YES	Horz
5550.42	PEAK	61.8	74	-12.2	NO	Horz
5550.42	AVG	50.3	54	-3.7	NO	Horz
6475.49	PEAK	54.7	74	-19.3	NO	Horz
6475.49	AVG	43.1	54	-10.9	NO	Horz
7400.56	PEAK	54.8	74	-19.2	YES	Vert
7400.56	AVG	43.7	54	-10.3	YES	Vert
8325.63	PEAK	49	74	-25	YES	Horz
8325.63	AVG	40	54	-14	YES	Horz
9250.67	PEAK	50.1	74	-23.9	YES	Vert
9250.67	AVG	40	54	-14	YES	Vert
* Low Loss setup includes: 1 Meter Measurement Distance and Very Low loss cables						
Low Loss setup confirms harmonics above 13 GHz are > 20 dB below Peak & Average Limits						
RBW=1 MHz, VBW=3 MHz						

Notes:

The margin computed in the Delta column was the difference between the general field strength limit and the measured result irrespective of whether or not the emission fell in a restricted band. All spurious emissions were greater than 30 dB below the fundamental.

2.8 RADIATED BAND EDGE MEASUREMENTS

2.8.1 Specification Reference

Part 15 Subpart C §15.247(d)

2.8.2 Standard Applicable

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

2.8.3 Equipment Under Test and Modification State

Serial No: none / Test Configuration A

2.8.4 Date of Test/Initial of test personnel who performed the test

03. – 06. March 2017 /DF

2.8.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.8.6 Environmental Conditions

Test performed at TÜV SÜD America Inc. Tampa facility.

Ambient Temperature	22 – 24 °C
Relative Humidity	48 – 52%

2.8.7 Additional Observations

- This is a radiated test at a 3-meter distance.
- There are no emissions found that do not comply with the restricted bands defined in FCC Part 15 Subpart C, 15.205.

- Measurement was done using Agilent E7405A spectrum analyzer. Correction Factor column is for informational purposes only. See Section 2.8.8 for sample computation.

2.8.8 Sample Computation (Radiated Emission)

Measuring equipment raw measurement (dB μ V) @ 30 MHz			20.0
Correction Factor (dB)	Cable 2	0.24	18.94
	TEMC00011 (antenna)	18.70	
Reported QuasiPeak Final Measurement (dB μ V/m) @ 30MHz			38.94

2.8.9 Test Results

See attached plots.

2.8.10 Test Results


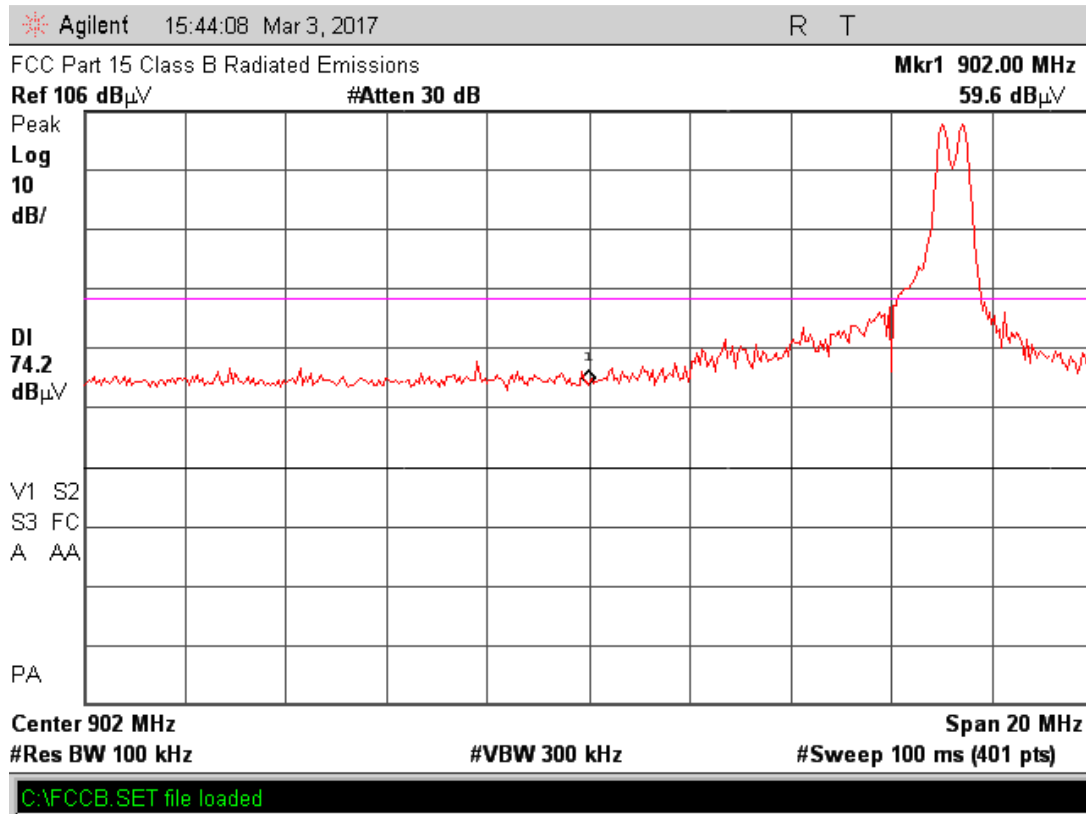


Figure 2.8.10-1 – Radiated Emissions Level at the Lower Band Edge Frequency

2.8.11 Test Results

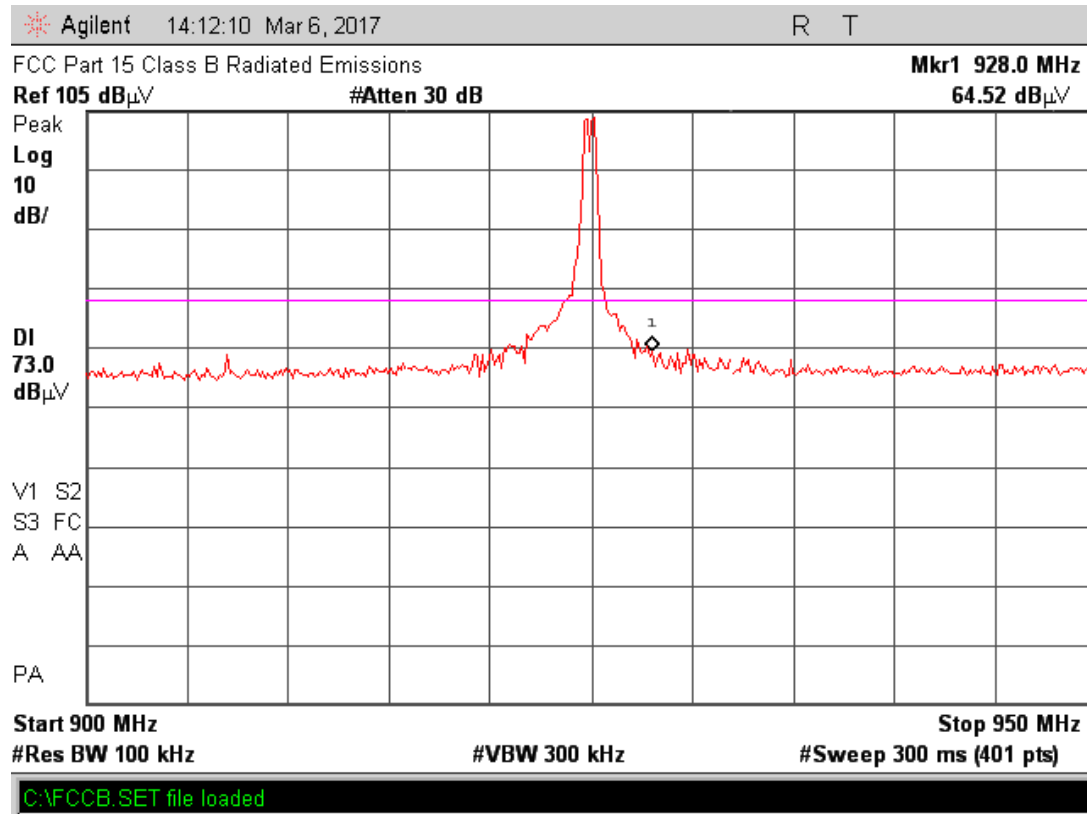

2.8.12

Figure 2.8.10-2 – Radiated Emissions Level at the Upper Band Edge Frequency

2.9 POWER SPECTRAL DENSITY

2.9.1 Specification Reference

Part 15 Subpart C §15.247(e)

2.9.2 Standard Applicable

(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

2.9.3 Equipment Under Test and Modification State

Serial No: none / Test Configuration A

2.9.4 Date of Test/Initial of test personnel who performed the test

19. December 2016 / DF

2.9.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.9.6 Environmental Conditions

Test performed at TÜV SÜD America Inc. Tampa facility.

Ambient Temperature	22 – 24 °C
Relative Humidity	48 – 52%

2.9.7 Additional Observations

- This is a radiated test at a 3-meter distance.
- Test procedure is per Section 10.2 of KDB 558074 (April 08, 2016).
- Detector is Peak.
- Max hold
- Sweep time is Auto Couple.
- EUT complies with 3 kHz RBW.

2.9.8 Test Results Summary

Mode	Channel Freq MHz	Marker Reading using 3 kHz RBW (dBμV/m)	Calculated PSD (dBm)	PSD Limit (dBm)	Compliance
FSK	909	98.3	3.1	8	Complies
	915	96.7	1.5	8	Complies
	925	98.0	2.8	8	Complies

2.9.9 Test Results Plots – Amplitudes are in dBμV/m at a (3) Meter Distance

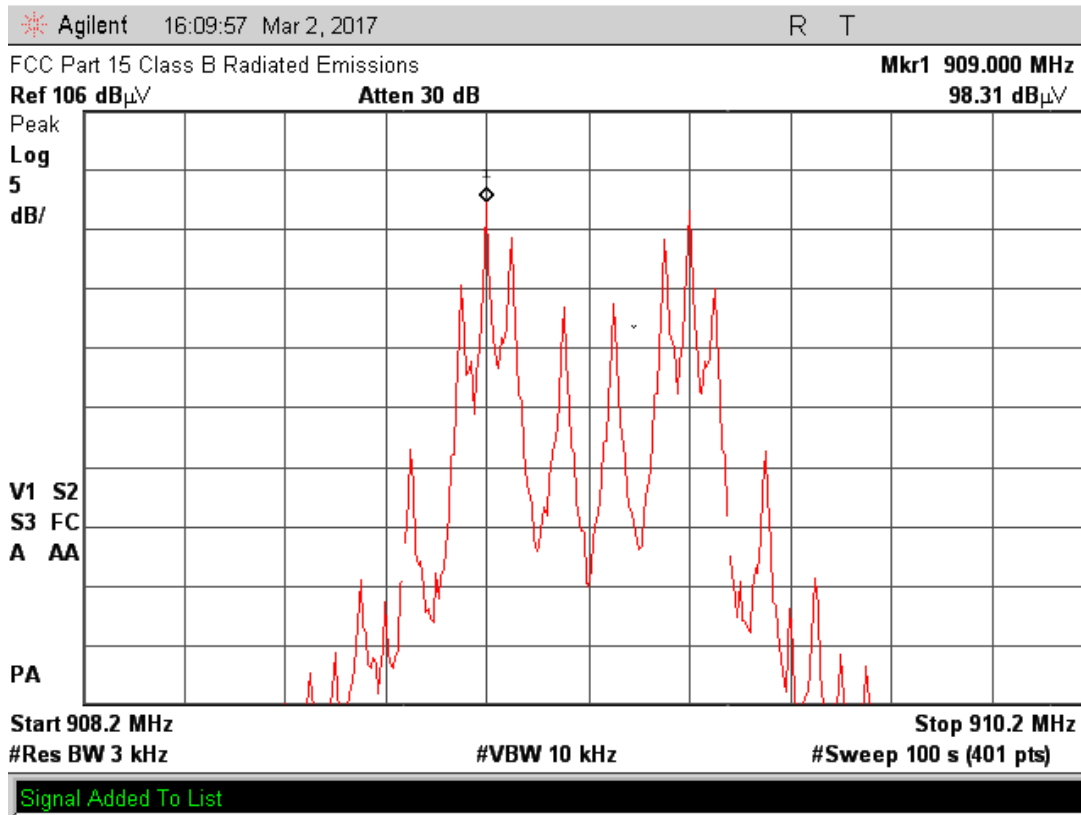


Figure 2.9.9-1 - Power Spectral Density – Low Channel

Notes:

ANSI C63.10:2013 clause 9.5

$$\text{EIRP} = E + (20 \log d) - 104.7$$

$$\text{EIRP} = 98.3 + 9.54 - 104.7$$

$$\text{EIRP} = 3.1 \text{ dBm}$$

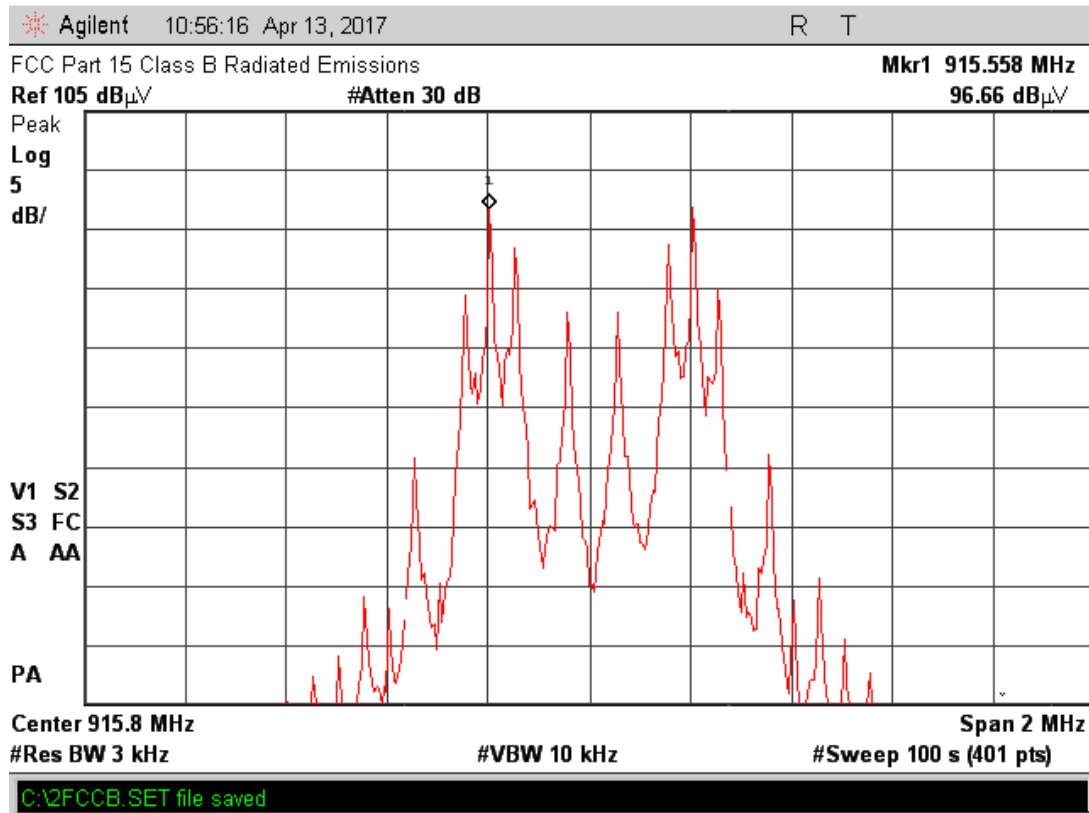


Figure 2.9.9-2 - Power Spectral Density – Mid Channel

Notes:

ANSI C63.10:2013 clause 9.5

$$\text{EIRP} = E + (20 \log d) - 104.7$$

$$\text{EIRP} = 96.7 + 9.54 - 104.7$$

$$\text{EIRP} = -6.96 \text{ dBm}$$

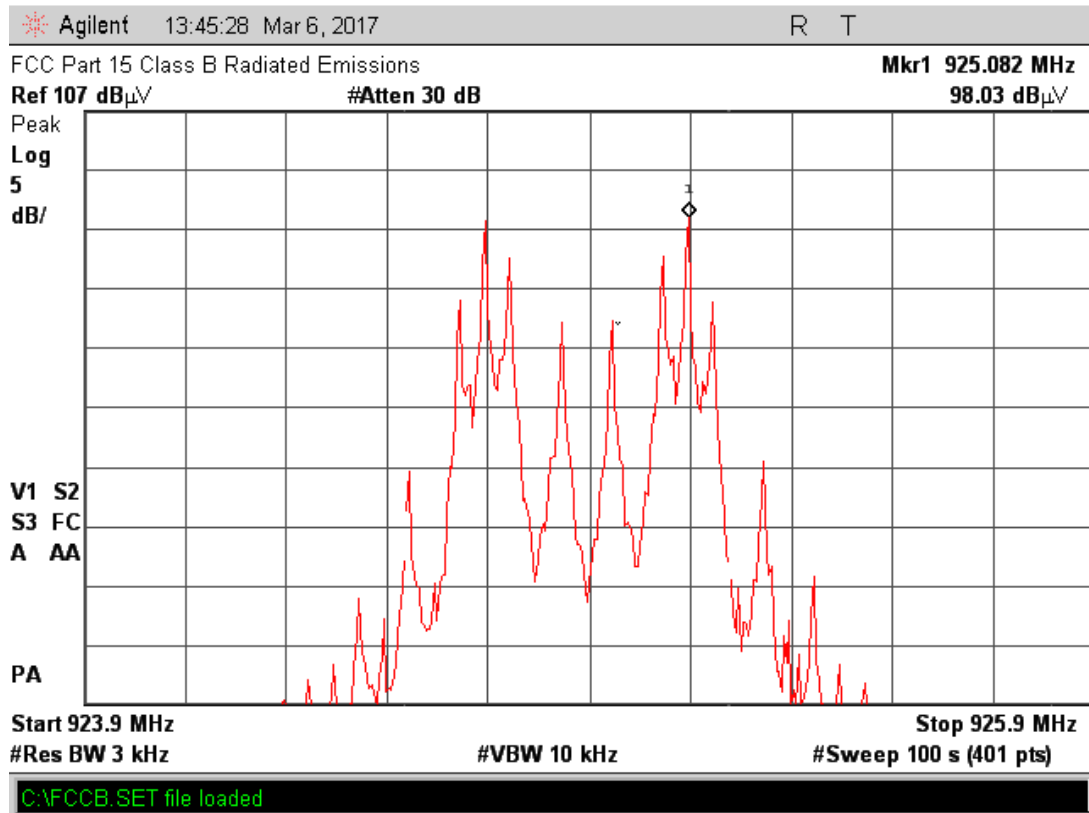


Figure 2.9.9-3 - Power Spectral Density – High Channel

Notes:

ANSI C63.10:2013 clause 9.5

$$\text{EIRP} = E + (20 \log d) - 104.7$$

$$\text{EIRP} = 98.0 + 9.54 - 104.7$$

$$\text{EIRP} = 2.8 \text{ dBm}$$



SECTION 3

TEST EQUIPMENT USED



3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

ID Number (SDGE/SDRB)	Test Equipment	Type	Serial Number	Manufacturer	Cal Date	Cal Due Date
Antenna Conducted Port Setup						
Radiated Test Setup						
TEMC00005	Bilog Antenna	6112B	2579	Chase EMC	12/17/2015	12/17/2017
TEMC00061	Double-ridged waveguide horn antenna	3117	00109296	ETS Lindgren	2/3/2016	2/3/2018
TEMC00128	EMI Test Receiver	ESIB 40	100255/040	Rhode & Schwarz	11/7/2016	11/7/2017
TEMC00012	Spectrum Analyzer	E7404A	MY42000055	Agilent	4/10/2015	4/10/2017
TEMC00013	Pre-amplifier	PA-122	181925	Compower	10/3/2016	10/3/2017
	High-frequency cable					
	High-frequency cable					
Conducted Emissions						
Miscellaneous						
	Test Software	EMC32	V8.54	Rhode & Schwarz	N/A	

3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:

3.2.1 Radiated Emission Measurements (Below 1GHz)

Radiated Measurement 30 - 1000 MHz at a distance of 3 m						
	Input Quantity (Contribution) X_i	Value	Prob. Dist.	Divisor	$u_i(x)$	$u_i(x)^2$
1	Receiver reading	0.10 dB	Normal, k=1	1.000	0.10	0.01
2	Attenuation: antenna-receiver	0.20 dB	Normal, k=2	2.000	0.10	0.01
3	Antenna factor AF	0.58 dB	Normal, k=2	2.000	0.29	0.08
4	Receiver sinewave accuracy	0.40 dB	Normal, k=2	2.000	0.20	0.04
5	Receiver pulse amplitude	1.50 dB	Rectangular	1.732	0.87	0.75
6	Receiver pulse repetition rate	1.50 dB	Rectangular	1.732	0.87	0.75
7	Noise floor proximity	0.50 dB	Rectangular	1.732	0.29	0.08
8	Mismatch: antenna-receiver	0.95 dB	U-shaped	1.414	0.67	0.45
9	AF frequency interpolation	0.30 dB	Rectangular	1.732	0.17	0.03
10	AF height deviations	0.10 dB	Rectangular	1.732	0.06	0.00
11	Directivity difference at 3 m	3.12 dB	Rectangular	1.732	1.80	3.24
12	Phase center location at 3 m	1.00 dB	Rectangular	1.732	0.58	0.33
13	Cross-polarisation	0.90 dB	Rectangular	1.732	0.52	0.27
14	Balance	0.00 dB	Rectangular	1.732	0.00	0.00
15	Site imperfections	3.85 dB	Triangular	2.449	1.57	2.47
16	Separation distance at 3 m	0.30 dB	Rectangular	1.732	0.17	0.03
17	Effect of setup table material	0.77 dB	Rectangular	1.732	0.44	0.20
18	Table height at 3 m	0.10 dB	Normal, k=2	2.000	0.05	0.00
19	Near-field effects	0.00 dB	Triangular	2.449	0.00	0.00
20	Effect of ambient noise on OATS	0.00 dB				0.00
Combined standard uncertainty			Normal	2.96	dB	
Expanded uncertainty			Normal, k=2	5.92	dB	

3.2.2 Radiated Emission Measurements (Above 1GHz)


Radiated Measurement Above 1 GHz at a distance of 3 m

	Input Quantity (Contribution) X_i	Value		Prob. Dist.	Divisor	$u_i(x)$	$u_i(x)^2$
1	Receiver reading	0.10	dB	Normal, k=1	1.000	0.10	0.01
2	Attenuation: antenna-receiver	0.30	dB	Normal, k=2	2.000	0.15	0.02
3	Preamplifier Gain	0.20	dB	Normal, k=2	2.000	0.10	0.01
4	Antenna factor AF	0.75	dB	Normal, k=2	2.000	0.38	0.14
5	Sinewave accuracy	0.20	dB	Normal, k=2	2.000	0.10	0.01
6	Instability of preamp gain	1.21	dB	Rectangular	1.732	0.70	0.49
7	Noise floor proximity	0.70	dB	Rectangular	1.732	0.40	0.16
8	Mismatch: antenna-preamplifier	1.41	dB	U-shaped	1.414	1.00	0.99
9	Mismatch: preamplifier-receiver	1.30	dB	U-shaped	1.414	0.92	0.85
10	AF frequency interpolation	0.30	dB	Rectangular	1.732	0.17	0.03
11	Directivity difference at 3 m	1.50	dB	Rectangular	1.732	0.87	0.75
12	Phase center location at 3 m	0.30	dB	Rectangular	1.732	0.17	0.03
13	Cross-polarisation	0.90	dB	Rectangular	1.732	0.52	0.27
14	Site imperfections VSWR (Method 2)	2.25	dB	Triangular	2.449	0.92	0.84
15	Effect of setup table material	2.90	dB	Rectangular	1.732	1.67	2.80
16	Separation distance at 3 m	0.30	dB	Rectangular	1.732	0.17	0.03
17	Table height at 3 m	0.00	dB	Normal, k=2	2.000	0.00	0.00
Combined standard uncertainty				Normal	2.73	dB	
Expanded uncertainty				Normal, k=2	5.46	dB	


SECTION 4

DIAGRAM OF TEST SETUP


4.1 TEST SETUP DIAGRAM

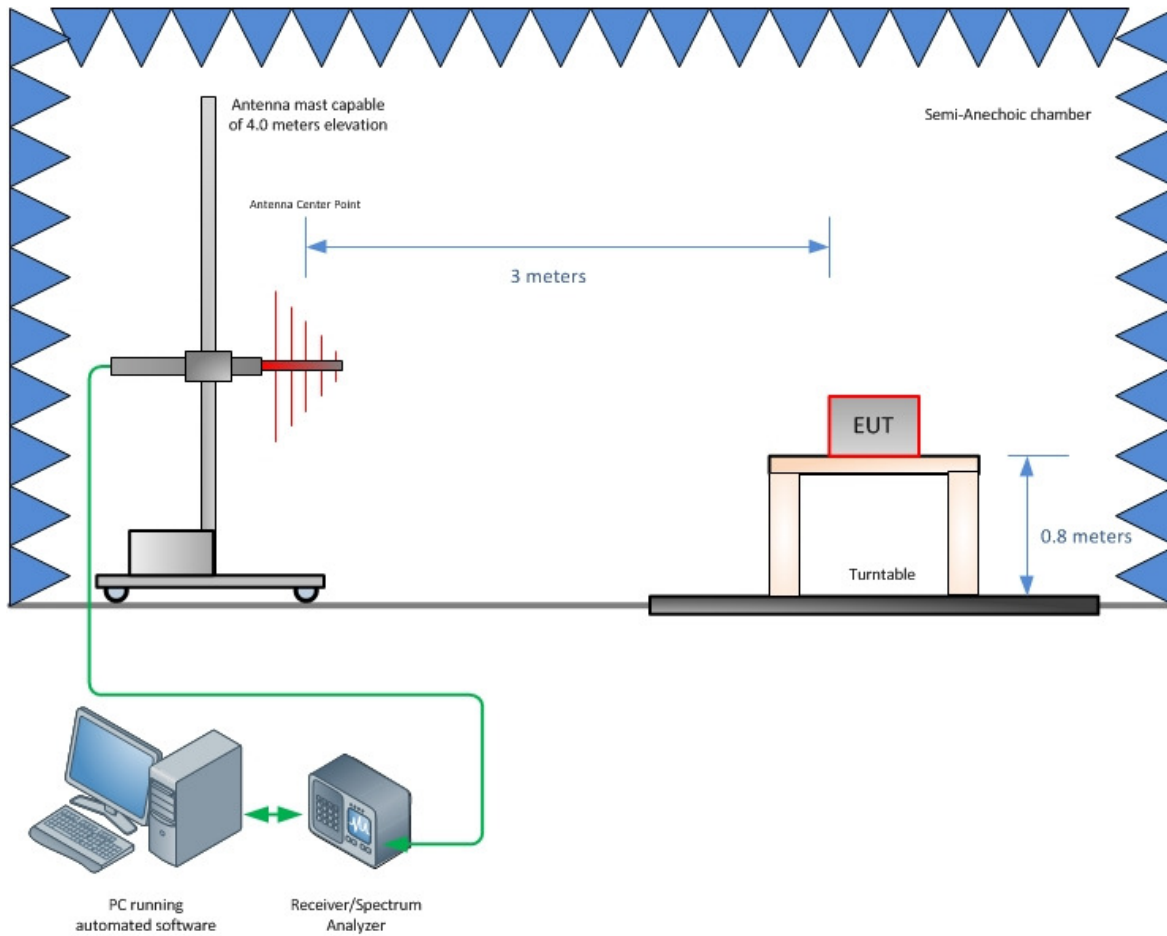

Radiated Emission Test Setup (Below 1GHz)

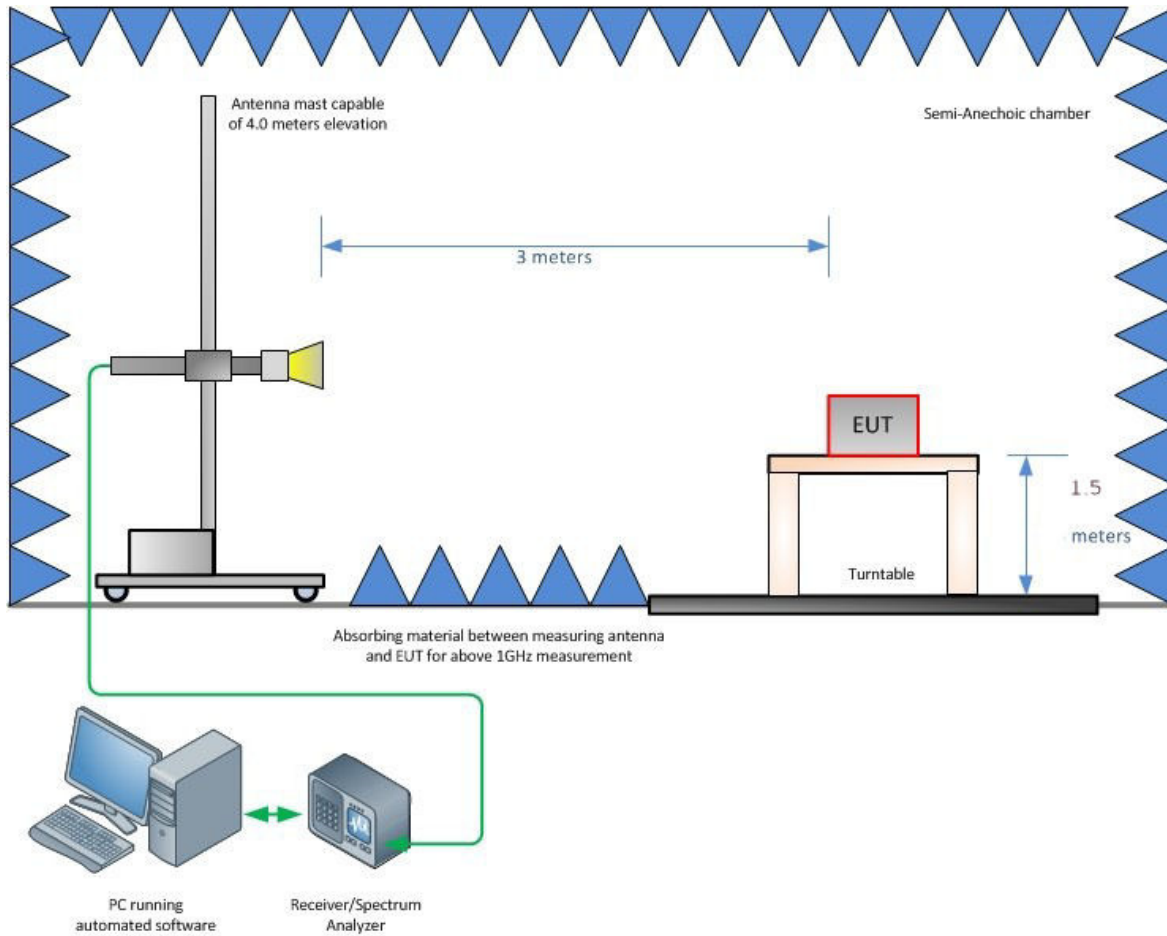

Radiated Emission Test Setup (Above 1GHz)

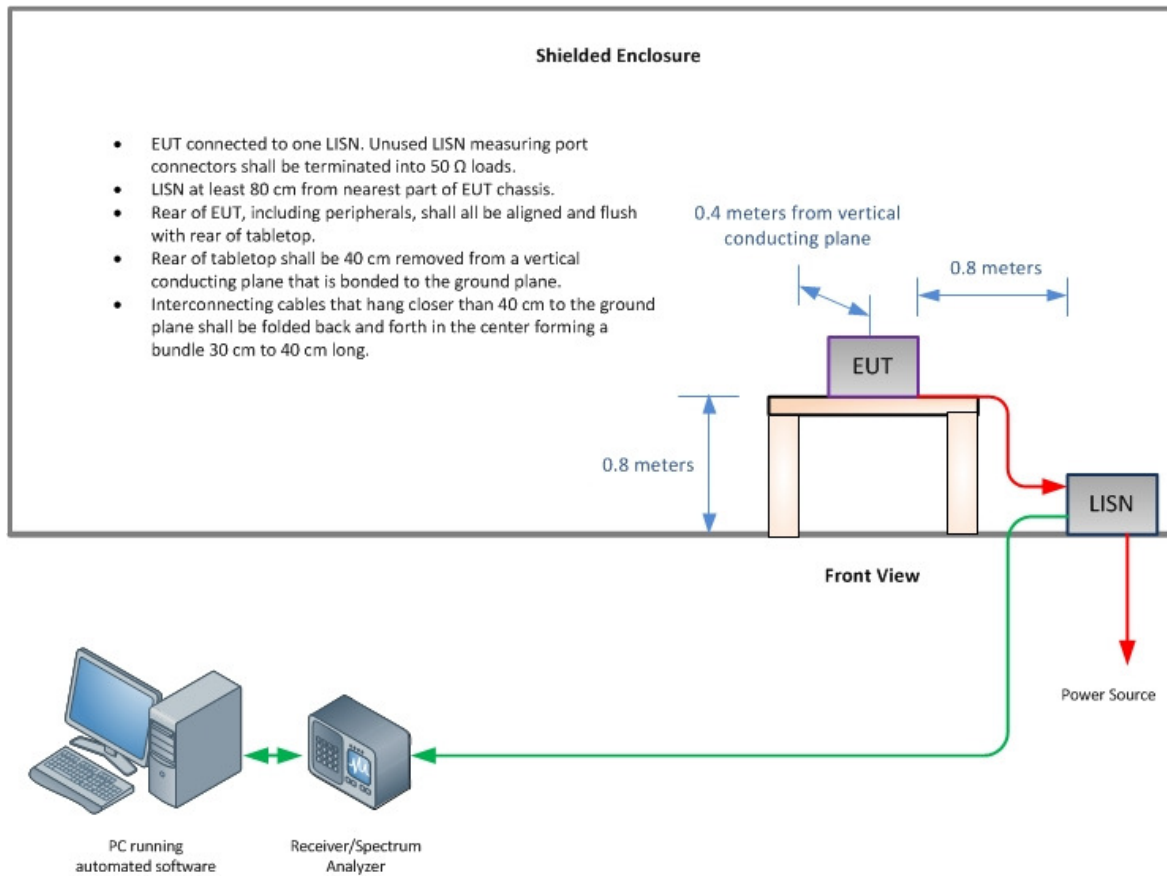

Conducted Emission Test Setup



SECTION 5

ACCREDITATION, DISCLAIMERS AND COPYRIGHT

5.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT

TÜV SÜD America Inc.'s reports apply only to the specific sample tested under stated test conditions. It is the manufacturer's responsibility to assure the continued compliance of production units of this model. TÜV SÜD America, Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD America, Inc.'s issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and TÜV SÜD America, Inc., extracts from the test report shall not be reproduced, except in full without TÜV SÜD America, Inc.'s written approval.

This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the federal government.

TÜV SÜD America, Inc. and its professional staff hold government and professional organization certifications for A2LA, AAMI, ACIL, AEA, ANSI, IEEE, and INARTE.



A2LA Cert. No. 2955.15

