

**SMOKE ALARM: 3 Long beeps, repeating.**

**STANDBY:** green LED blink every 60s.

**FAULT:** Amber LED blink every 5s, chirp every 30s.


**LOW BATTERY:** Amber LED blink every 5s, chirp every 60s.

**END OF LIFE:** Amber LED blink every 5s, chirp twice every 30s.

**FREEZE WARNING:** Red LED blink every 20 min.

**Push button to test weekly.**

See user guide for more information

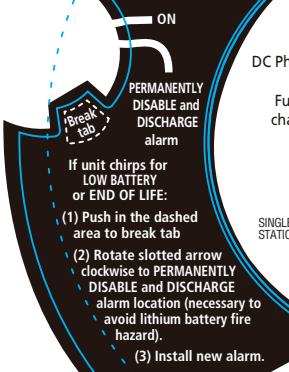

## Model/Modèle SDX-135Z

DC Photoelectric Smoke/Fixed & Rate of Rise Heat /Freeze Detector, with Wireless

Fumée photoélectrique CC / fixe et taux de chaleur de montée / Freezer Detector, sans fil

SIGNALING



S1016

SIGNALATION



SÉCURISATION  
SIGNALATION

SINGLE AND / OR MULTIPLE STATION SMOKE ALARM.

ISSUE NO. XXXXX

AVERTISSEUR DE FUMÉE AUTONOME ET / OU MULTIPONCTUEL.

Smoke sensitivity: 2.32 +/- 1.35 %/ft OBS

YYYY, MMM, DD

0318-7103-00



FCC ID:2A5609702  
IC:7145A-25609702

SENSOR ID

Clean alarm openings annually using vacuum or compressed air.

Product is sealed with no serviceable parts.

Do not use where ambient temp exceeds 100° F (37.8° C).

Constant exposure to high/low temps or high humidity may lower battery life.

Power up time 15 sec. Heat sensor rating:

Fixed 135° F (57° C). Rate of rise

>15 °F/min (8.3 °C/min) (after 85 °F/29.4 °C). 41°F freeze warning notification to panel.

For service return to:  
UTC Fire & Security Americas  
Corporation, Inc.  
3211 Progress Drive,  
Lincolnton, NC, 28092,  
USA

10 year warranty.  
Made in China.  
0318-7101-00

0318-7101-00\_SDX-135Z