

---

# TEST REPORT FOR WLAN TESTING

---

Report No: SRTC2020-9004(F)-20011701(F)

Product Name: Wi-Fi Module

Product Model: Hisense MW13

Applicant: Hisense Communication Co., Ltd.

Manufacturer: Hisense Communication Co., Ltd.

Specification: FCC Part 15 Subpart C (2019)

FCC ID: SARHISENSEMW13

The State Radio\_monitoring\_center Testing Center (SRTC)

15th Building, No.30 Shixing Street, Shijingshan District,

Beijing, P.R.China

Tel: 86-10-57996183 Fax: 86-10-57996388

## CONTENTS

<b>1. GENERAL INFORMATION .....</b>	<b>2</b>
1.1 NOTES OF THE TEST REPORT .....	2
1.2 INFORMATION ABOUT THE TESTING LABORATORY .....	2
1.3 APPLICANT’S DETAILS .....	2
1.4 MANUFACTURER’S DETAILS .....	2
1.5 TEST ENVIRONMENT .....	3
<b>2 DESCRIPTION OF THE DEVICE UNDER TEST .....</b>	<b>4</b>
2.1 FINAL EQUIPMENT BUILD STATUS .....	4
2.2 DESCRIPTION OF TEST MODES .....	5
2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL .....	5
2.3 DUTY CYCLE OF TEST SIGNAL .....	6
2.4 EUT OPERATING CONDITIONS .....	7
2.5 SUPPORT EQUIPMENT .....	7
<b>3 REFERENCE SPECIFICATION .....</b>	<b>7</b>
<b>4 KEY TO NOTES AND RESULT CODES .....</b>	<b>7</b>
<b>5 RESULT SUMMARY .....</b>	<b>8</b>
<b>6 TEST RESULT .....</b>	<b>9</b>
6.1 PEAK POWER OUTPUT .....	9
6.2 6dB BANDWIDTH .....	10
6.3 TRANSMITTER POWER SPECTRAL DENSITY .....	11
6.4 CONDUCTED OUT OF BAND EMISSION MEASUREMENT .....	12
6.5 BAND-EDGE MEASUREMENT .....	13
6.6 SPURIOUS RADIATED EMISSIONS .....	14
6.7 AC POWER LINE CONDUCTED EMISSION .....	19
<b>7 MEASUREMENT UNCERTAINTIES .....</b>	<b>21</b>
<b>8 TEST EQUIPMENTS .....</b>	<b>22</b>
<b>APPENDIX A – TEST DATA OF CONDUCTED EMISSION .....</b>	<b>23</b>
<b>APPENDIX B – TEST DATA OF RADIATED EMISSION .....</b>	<b>46</b>

## **1. GENERAL INFORMATION**

### **1.1 Notes of the test report**

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio\_monitoring\_center Testing Center (SRTC). The test results relate only to individual items of the samples which have been tested. The certification and accreditation identifiers used in this report shall not be applicable to the tested or calibrated samples thereof. The manufacturer shall not mark the tested samples or items (or a separate part of the item) with the identifiers of certification and accreditation to mislead relevant parties about the tested samples or items.

### **1.2 Information about the testing laboratory**

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Address:	15th Building, No.30 Shixing Street, Shijingshan District, P.R.China
City:	Beijing
Country or Region:	P.R.China
Contacted person:	Liu Jia
Tel:	+86 10 57996183
Fax:	+86 10 57996388
Email:	liujiaf@srtc.org.cn

### **1.3 Applicant's details**

Company:	Hisense Communication Co., Ltd.
Address:	218 Qianwangang Road, Economic & Technological Development Zone, Qingdao, Shandong Province, P.R. China
City:	Qingdao
Country or Region:	Shandong Province, P.R. China
Contacted person:	Wang Haining
Tel:	+ 86-532-6761747
Fax:	---
Email:	wanghaining@hisense.com

### **1.4 Manufacturer's details**

Company:	Hisense Communication Co., Ltd.
Address:	218 Qianwangang Road, Economic & Technological Development Zone, Qingdao, Shandong Province, P.R. China
City:	Qingdao
Country or Region:	Shandong Province, P.R. China
Contacted person:	Wang Haining
Tel:	+ 86-532-6761747
Fax:	---
Email:	wanghaining@hisense.com

### 1.5 Test Environment

Date of Receipt of test sample at SRTC:	2020-01-17
Testing Start Date:	2020-01-17
Testing End Date:	2020-03-17

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient	25	30

Normal Supply Voltage (V d.c.):	5.0
---------------------------------	-----

## 2 DESCRIPTION OF THE DEVICE UNDER TEST

### 2.1 Final Equipment Build Status

Frequency Range	2.412GHz~2.462GHz
Number of Channel For 20MHz	11
Number of Channel For 20MHz	7
Data Rate	802.11b:1Mbps~11Mbps 802.11g:6Mbps~54Mbps 802.11n HT20:MCS0~MCS7 802.11n HT40:MCS0~MCS7
Duplex Mode	TDD
Channel Spacing	5MHz
Power Supply	DC Supply
Software Revision	M1679.6.01.01.00
Hardware Revision	V1.00A
SN	CA2C4F87F98F
Antenna type	Refer to Note
Antenna connector	Refer to Note

#### **Note: Antenna requirement (FCC part 15.203)**

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- The antenna(s) of the EUT are permanently attached.
- There are no provisions for connection to an external antenna.

Note: The antenna provide to the EUT, please refer to the following table:

Brand	Model	Antenna gain	Frequency range(GHz)	Antenna type	Connecter Type
N/A	N/A	2.7dBi	2.412GHz~2.462GHz	Ceramic Antenna	N/A

Manufacturers ensure that their designs will not be modified by the user or third parties arbitrary antenna parameters and performance. The EUT complies with the requirement of §15.203.

## 2.2 Description of Test Modes

11 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	---	---

### 2.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE ≥ 1G	RE < 1G	PLC	APCM	
-	√	√	√	√	-

Where

RE ≥ 1G: Radiated Emission above 1GHz

RE < 1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

#### Radiated Emission Test (Above 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	6	DBPSK/ BPSK	1,6,6.5

**Radiated Emission Test (Below 1GHz):**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	6	DBPSK/ BPSK	1,6,6.5

**Power Line Conducted Emission Test:**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	6	DBPSK	1

**Antenna Port Conducted Measurement:**

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	1,3, 6,9, 11	DBPSK/ BPSK	1,6,6.5

**2.3 Duty Cycle of Test Signal**

Modulation Type	Data Rate	Duty Cycle	Correction factor
11b	1Mbps	99.0%	0.04dB
11g	6Mbps	94.1%	0.26dB
11n(HT20)	6.5Mbps	93.7%	0.28dB
11n(HT40)	13.5Mbps	88.0%	0.56dB

Duty cycle of test signal is > 98 %, duty factor shall not be considered.  
Correction factor =  $10^* \log (1/\text{duty cycle})$

## 2.4 EUT Operating conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

## 2.5 Support Equipment

The following support equipment was used to exercise the DUT during testing:

NA

## 3 REFERENCE SPECIFICATION

Specification	Version	Title
FCC part15 Subpart C	2019	Intentional radiators
ANSI C63.10	2013	Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074D01 V05R02	April 2, 2019	Guidance for compliance measurements on Digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules




## 4 KEY TO NOTES AND RESULT CODES

Code	Meaning
PASS	Test result shows that the requirements of the relevant specification have been met.
FAIL	Test result shows that the requirements of the relevant specification have not been met.
N/T	Test case is not tested.



## 5 RESULT SUMMARY

No.	Test case	Reference	Verdict
1	Transmitter Output Power	15.247(b)(3)	Pass
2	6dB Bandwidth	15.247(a)(2)	Pass
3	Transmitter Power Spectral Density	15.247(e) )	Pass
4	Conducted Out of band emission measurement	15.247(d)	Pass
5	Band Edge	15.247(d)	Pass
6	Spurious Radiated Emissions	15.205/15.209	Pass
7	AC Power line Conducted Emission	15.207	Pass
8	Antenna requirement	15.203	Pass(refer to section 2.1)

This Test Report Is Issued by: Mr. Peng Zhen 	Checked by: Mr. Li Bin 
Tested by: Mr. He Dengshun 	Issued date:  20200317

## **6 TEST RESULT**

### **6.1 Peak Power Output**

#### **6.1.1 Ambient condition**

Temperature	Relative humidity	Pressure
25°C	30%	101.5kPa

#### **6.2.2 Test limit**

Part15.247 (b) (3)

The maximum permissible conducted output power is 1 Watt.

#### **6.2.3 Test Procedure Used**

ANSI C63.10-2013 – Section 11.9.1.3

ANSI C63.10-2013 – Section 11.9.2.3.2

KDB 558074 D01 v05r02 – Section 8.3.1.3

#### **6.2.4 Test Settings**

Peak Power Measurement


The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

#### **6.2.5 Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.



#### **6.2.6 Test result**

The test results are shown in Appendix A.

## 6.2 6dB Bandwidth

### 6.2.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	30%	101.5kPa

### 6.1.2 Test limit

Part15.247 (a) (2)

The minimum permissible 6dB bandwidth is 500 kHz

### 6.1.3 Test Procedure Used

ANSI C63.10-2013 – Section 11.8.2 Option 2

KDB 558074 D01 v05r02 – Section 8.2

### 6.1.4 Test Settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 6. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.

2. RBW = 100 kHz

3. VBW  $\geq$  3 x RBW

4. Detector = Peak


5. Trace mode = max hold

6. Sweep = auto couple

7. The trace was allowed to stabilize

### 6.1.5 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



### 6.1.6 Test result

The test results are shown in Appendix A.

### 6.3 Transmitter Power Spectral Density

#### 6.3.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	30%	101.5kPa

#### 6.3.2 Test limit

Part15.247 (e)

The maximum permissible power spectral density is 8.0dBm in any 3 kHz band.

#### 6.3.3 Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD


KDB 558074 D01 v05r02 – Section 8.4

#### 6.3.4 Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3 kHz
4. VBW = 10 kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

#### 6.3.5 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



#### 6.3.7 Test result

The test results are shown in Appendix A.

## 6.4 Conducted Out of band emission measurement

### 6.4.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	30%	101.5kPa

### 6.4.2 Test limit

Part 15.247(d): The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth.

### 6.4.3 Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3

KDB 558074 D01 v05r02 – Section 8.5

### 6.4.4 Reference level measurement Settings

Establish a reference level by using the following procedure:


- Set instrument center frequency to DTS channel center frequency.
- Set the span to  $\geq 1.5$  MHz
- Set the RBW = 100 kHz.
- Set the VBW  $\geq 300$  kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

### 6.4.5 Test Settings

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW  $\geq 300$  kHz.
- Detector = peak.
- Set span to encompass the spectrum to be examined
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

### 6.4.6 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



### 6.4.7 Test result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement. The test results are shown in Appendix A.

## 6.5 Band-edge measurement

### 6.5.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	30%	101.5kPa

### 6.5.2 Test limit

Part 15.247(d): The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth.

### 6.5.3 Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3

KDB 558074 D01 v05r02 – Section 8.7.2

### 6.5.4 Reference level measurement Settings

Establish a reference level by using the following procedure:


- Set instrument center frequency to DTS channel center frequency.
- Set the span to  $\geq 1.5$  MHz
- Set the RBW = 100 kHz.
- Set the VBW  $\geq 300$  kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

### 6.5.5 Test Settings

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW  $\geq 300$  kHz.
- Detector = peak.
- Set span to encompass the spectrum to be examined
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

### 6.5.6 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



### 6.5.7 Test result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement. The test results are shown in Appendix A.

## 6.6 Spurious Radiated Emissions

### 6.6.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	30%	101.5kPa

### 6.6.2 Test Description

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

### 6.6.3 Test limit

Part15.205, 15.209, 15.247(d)

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in below Table per Section 15.209. The spectrum shall be investigated from the lowest radio frequency signal generated in the device

Frequency [MHz]	Field strength [ $\mu\text{V}/\text{m}$ ]	Measured Distance [meters]
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

**Radiated Limits**

Part15.35(b):

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit

**Used conversion factor: Limit (dB $\mu\text{V}/\text{m}$ ) = 20 log (Limit ( $\mu\text{V}/\text{m}$ )/1 $\mu\text{V}/\text{m}$ )**

Frequency [MHz]	Detector	Unit (dB $\mu\text{V}/\text{m}$ )
30~88	Quasi-peak	40.0
88~216	Quasi-peak	43.5
216~960	Quasi-peak	46.0
960~1000	Quasi-peak	54.0
1000~5th harmonic of the highest frequency or 40GHz, whichever is lower	Average	54.0
	Peak	74.0

**Conversion Radiated limits**

## 6.6.4 Test Procedure Used

KDB 558074 D01 DTS Meas Guidance v05r02r02 – Section 12.2.7

### For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and recorded the reading with Maximum Hold Mode.

#### NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer complied the following setting:

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz

### For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground in chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and recorded the reading with Maximum Hold Mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detector and recorded the reading with Maximum Hold Mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.



**For the radiated emission test above 1GHz:**

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Average detection (AV) at frequency above 1GHz. If duty cycle of test signal is < 98%, the duty factor need added to measured value.
4. All modes of operation were investigated and the worst-case emissions are reported.

**6.6.5 Test Settings**

**Average Field Strength Measurements per Section 12.2.7 of KDB 558074 (Part 15.35)**

Frequency	Detector
< 1000MHz	Quasi-peak
>1000MHz	Peak and average

**Peak Field Strength Measurements per Section 12.2.7 of KDB 558074 (Part 15.35)**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW is set depending on measurement frequency, as specified in following table

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz
30-1000MHz	100-120kHz
>1000MHz	1MHz


3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

### 6.6.6 Test Setup


#### For Radiated emission below 30MHz

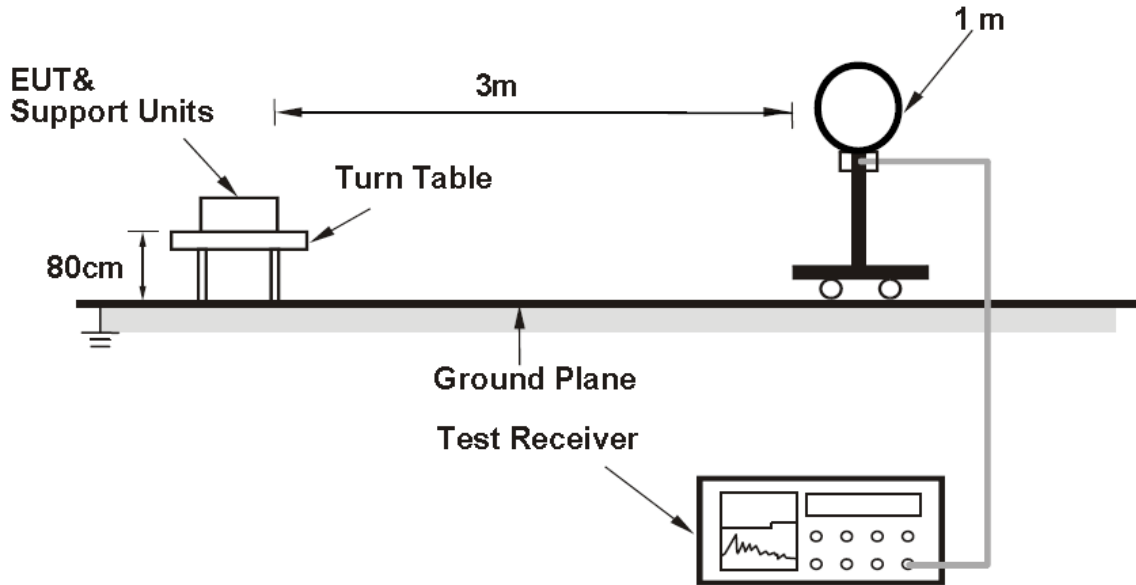

#### For Radiated emission 30MHz to 1GHz

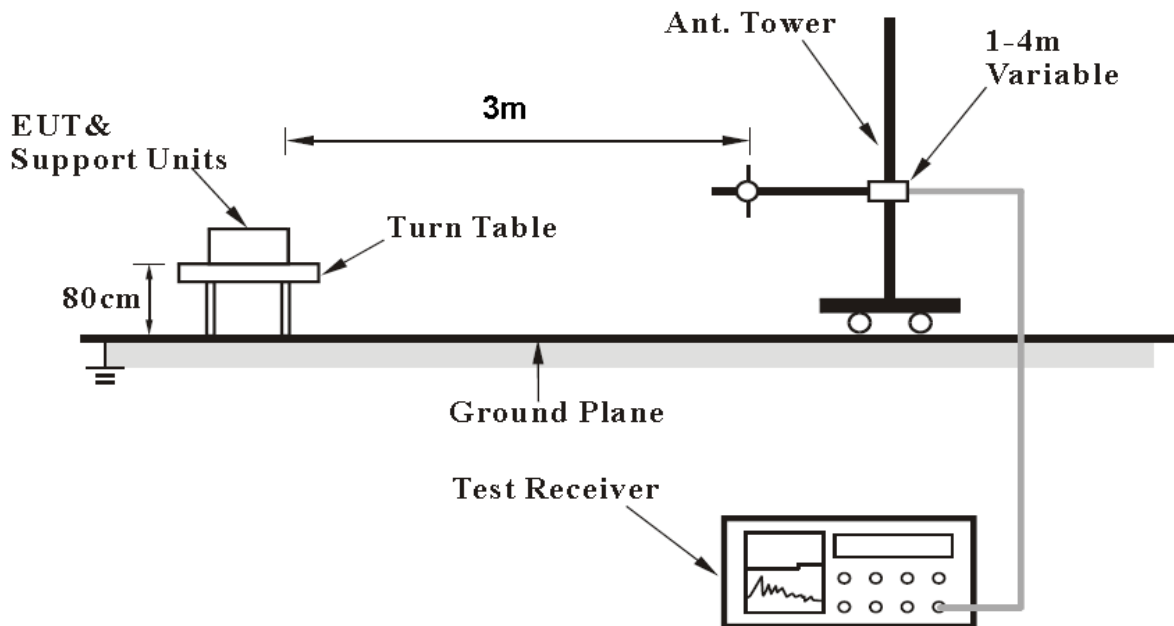

## For Radiated emission above 1GHz

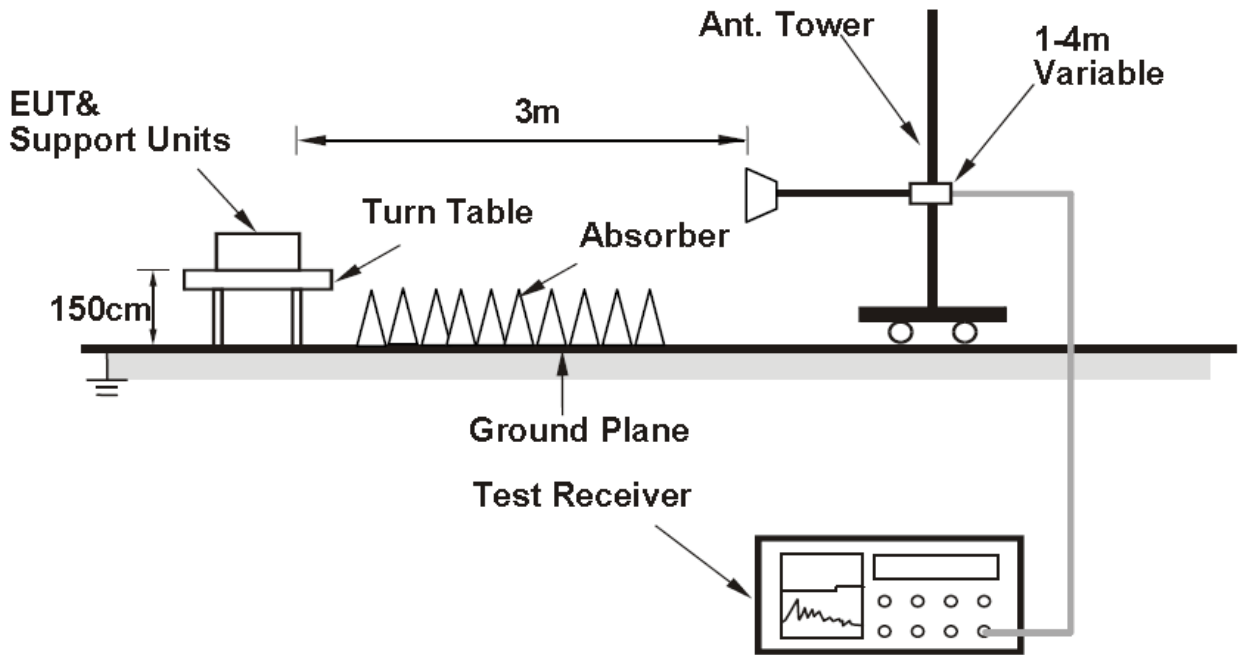

### 6.6.7 Test result

The test results are shown in Appendix B.

## 6.7 AC Power line Conducted Emission

### 6.7.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	30%	101.5kPa

### 6.7.2 Test limit

FCC Part15.207

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

The measurement is made according to ANSI C63.10-2013

### 6.7.3 Test Procedures

a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.


b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

c. The frequency range from 150 kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

The EUT shall test under the power AC120V/60Hz.

### 6.7.4 Test Setup

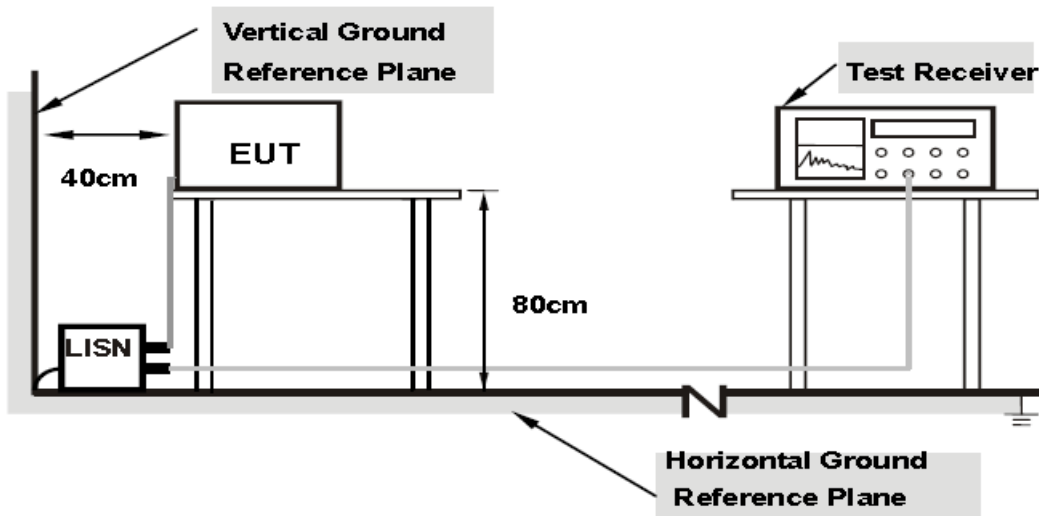

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 6.7.5 Test result

The test results are shown in Appendix B.

## 7 MEASUREMENT UNCERTAINTIES

Items	Uncertainty	
Occupied Bandwidth	3kHz	
Peak power output	0.67dB	
Band edge compliance	1.20dB	
Spurious emissions	30MHz~1GHz	2.83dB
	1GHz~12.75GHz	2.50dB
	12.75GHz~25GHz	2.75dB

## 8 TEST EQUIPMENTS

No.	Name/ Model	Manufacturer	S/N	Cal date	Cal Due date
1.	Spectrum Analyzer FSV	ROHDE&SCHWARZ	101065	2019.08.20	2020.08.19
2.	Power Meter E4416A	Agilent	MY52370013	2020.03.01	2021.02.29
3.	Power Sensor E9327A	Agilent	MY52420006	2020.03.01	2021.02.29
4.	Attenuator 6810.17.B	HUBER+SUHNER	768710	2019.08.20	2020.08.19
5.	23.18m×16.88m×9.60m Semi-Anechoic Chamber	FRANKONIA	---	----	----
6.	Turn table Diameter:5m	FRANKONIA	----	----	----
7.	Antenna master SAC(MA4.0)	MATURO	----	----	----
8.	9.080m×5.255m×3.525m Shielding room	FRANKONIA	----	----	----
9.	HF 907 Double-Ridged Waveguide Horn Antenna	R&S	100512	2019.08.20	2020.08.19
10.	3160-09 Receive antenna	SCHWARZ-BECK	002058-002	2019.08.20	2020.08.19
11.	ESI 40 EMI test receiver	R&S	100015	2019.08.20	2020.08.19
12.	ESCS30 EMI test receiver	R&S	100029	2019.08.20	2020.08.19
13.	HL562 Receive antenna	R&S	100167	2019.08.20	2020.08.19
14.	ENV216 AMN	R&S	3560.6550.12	2019.08.20	2020.08.19

## APPENDIX A – TEST DATA OF CONDUCTED EMISSION

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Test Mode	Data Rate
802.11b	1Mbps
802.11g	6Mbps
802.11n HT20	MCS0(6.5 Mbps)
802.11n HT40	MCS0(13.5 Mbps)

### Conducted power

Modulation type	Peak power output (dBm)		
	2412MHz	2437MHz	2462MHz
802.11b	19.07	19.28	19.11
802.11g	21.58	21.57	21.45
802.11n HT20	22.29	22.25	22.03
Modulation type	Peak power output (dBm)		
	2422MHz	2437MHz	2452MHz
802.11n HT40	22.38	21.88	22.00

Modulation type	Average power output (dBm)		
	2412MHz	2437MHz	2462MHz
802.11b	17.04	17.23	16.78
802.11g	11.42	11.69	11.32
802.11n HT20	11.68	11.49	11.37
Modulation type	Average power output (dBm)		
	2422MHz	2437MHz	2452MHz
802.11n HT40	11.25	11.17	11.08




### 6dB Bandwidth

Offset 10.8dB = Attenuator 10dB+ Temporary antenna connector loss 0.6dB+ Cable loss 0.2dB


Test Mode: 802.11b

Carrier frequency (MHz)	Channel No.	6 dB bandwidth(kHz)
2412	1	9047.1
2437	6	9053.1
2462	11	9056.1

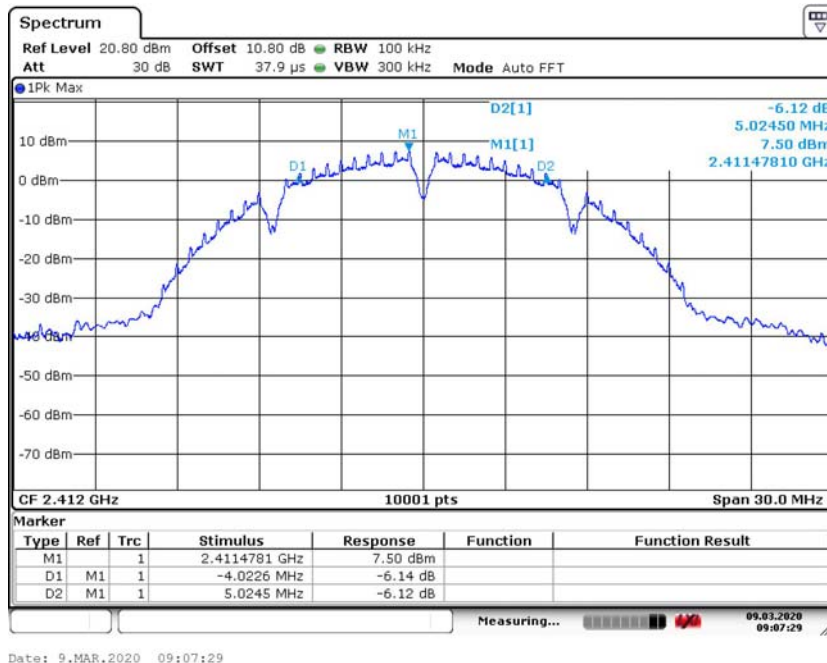


Date: 9.MAR.2020 09:07:29

Carrier frequency (MHz): 2412  
Channel No.:1  
Test Mode: 802.11b

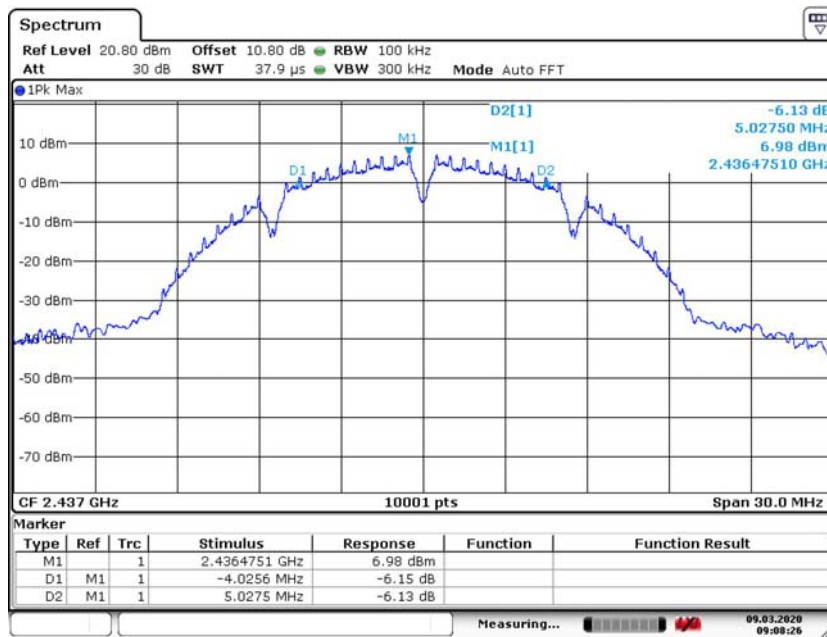

Date: 9.MAR.2020 09:08:26

Carrier frequency (MHz): 2437  
Channel No.:6  
Test Mode: 802.11b

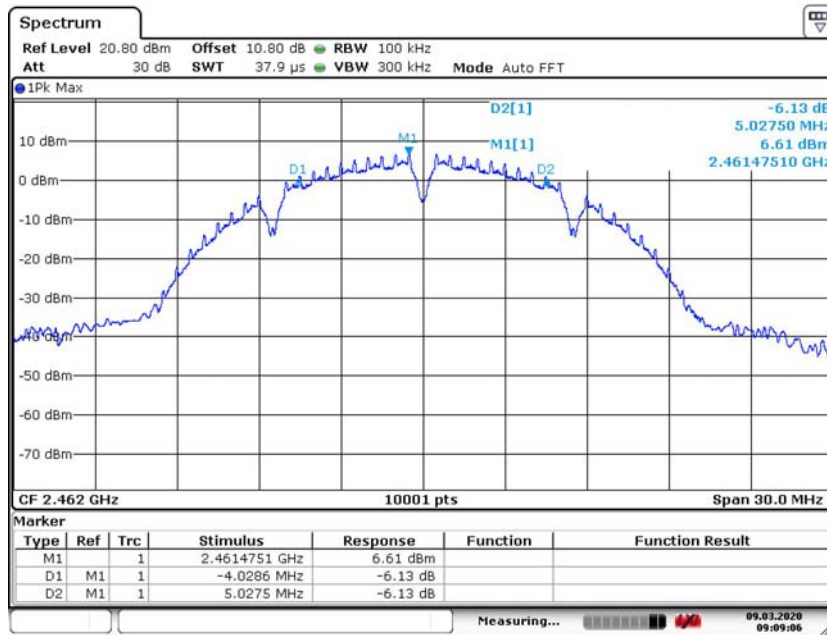


Date: 9.MAR.2020 09:09:05

Carrier frequency (MHz): 2462  
Channel No.:11  
Test Mode: 802.11b


Test Mode: 802.11g

Carrier frequency (MHz)	Channel No.	6 dB bandwidth(kHz)
2412	1	16354.3
2437	6	16354.4
2462	11	16357.4

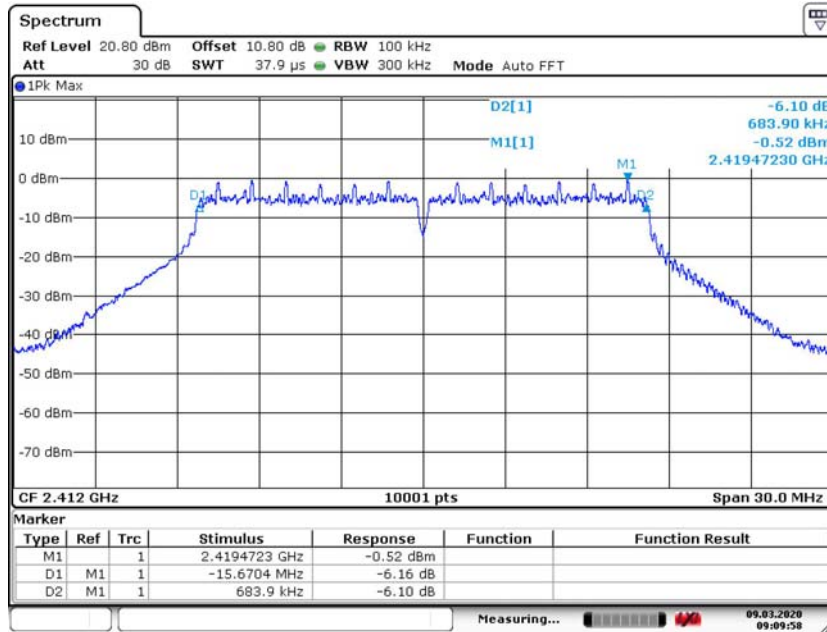


Date: 9.MAR.2020 09:09:58

Carrier frequency (MHz): 2412  
Channel No.:1  
Test Mode: 802.11g

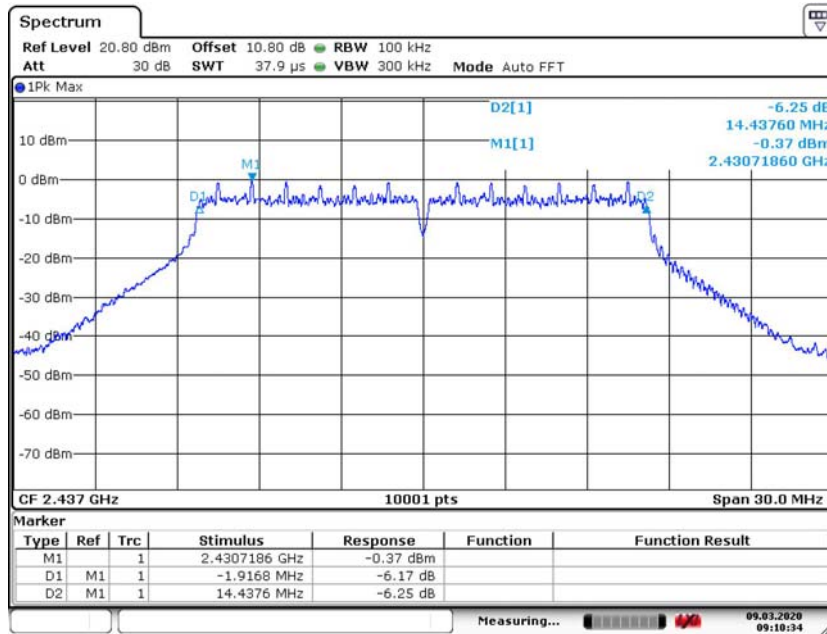

Date: 9.MAR.2020 09:10:34

Carrier frequency (MHz): 2437  
Channel No.:6  
Test Mode: 802.11g

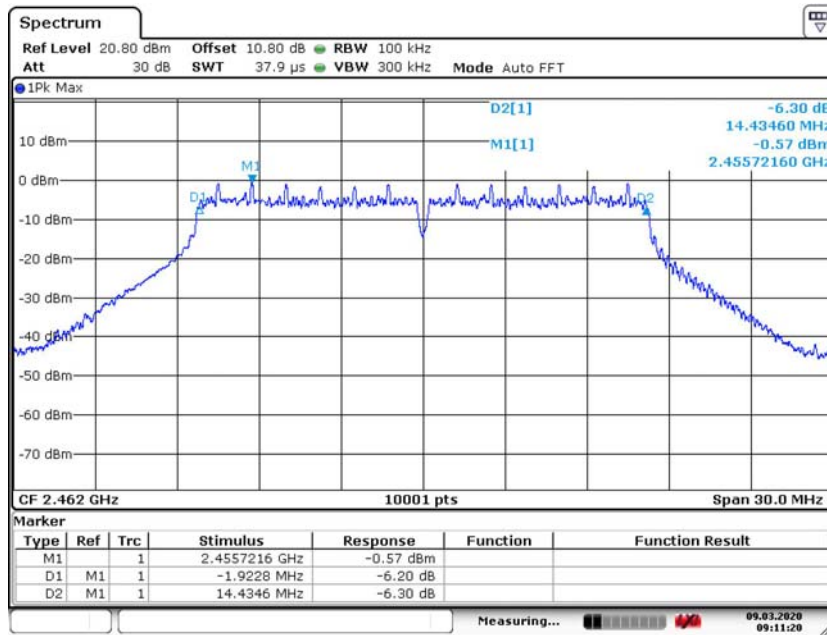


Date: 9.MAR.2020 09:11:20

Carrier frequency (MHz): 2462  
Channel No.:11  
Test Mode: 802.11g


Test Mode: 802.11n (HT20)

Carrier frequency (MHz)	Channel No.	6 dB bandwidth(kHz)
2412	1	17581.3
2437	6	17578.2
2462	11	17575.2

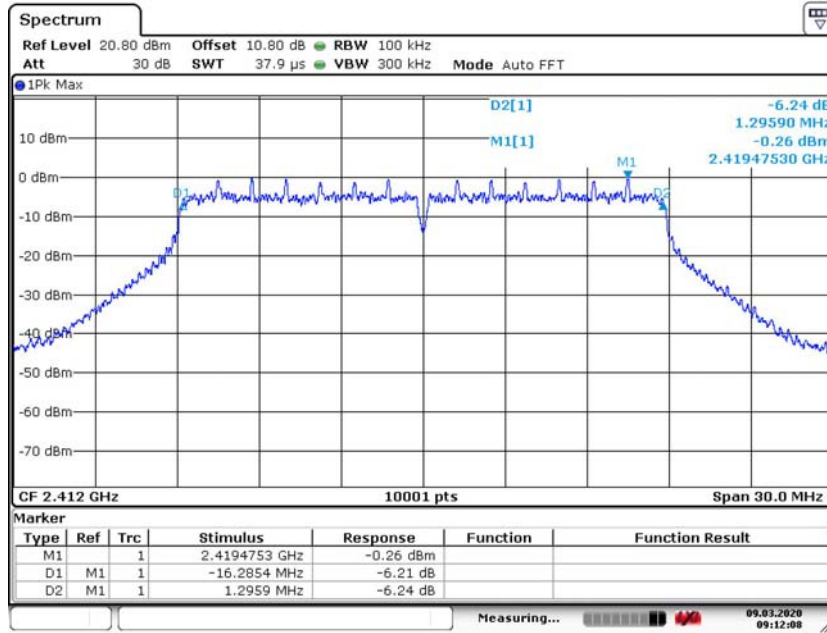


Date: 9.MAR.2020 09:12:08

Carrier frequency (MHz): 2412  
Channel No.:1  
Test Mode: 802.11n (HT20)

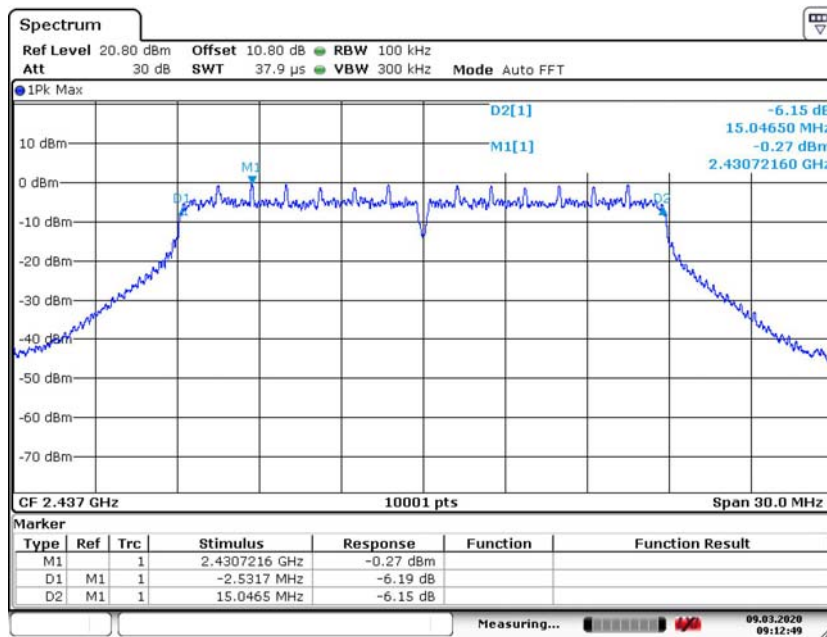

Date: 9.MAR.2020 09:12:48

Carrier frequency (MHz): 2437  
Channel No.:6  
Test Mode: 802.11n (HT20)

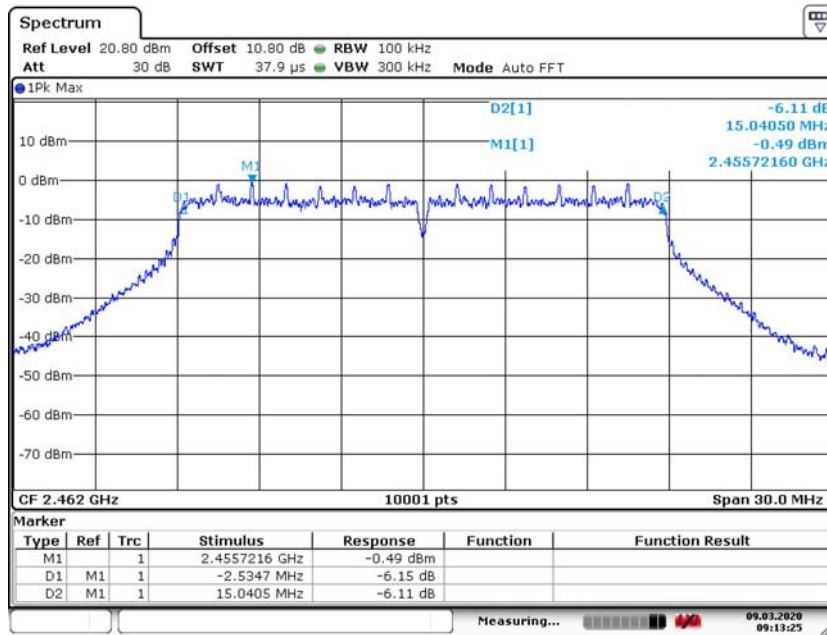


Date: 9.MAR.2020 09:13:25

Carrier frequency (MHz): 2462  
Channel No.:11  
Test Mode: 802.11n (HT20)


Test Mode: 802.11n (HT40)

Carrier frequency (MHz)	Channel No.	6 dB bandwidth(kHz)
2422	3	35504.5
2437	6	35504.5
2452	9	35510.5

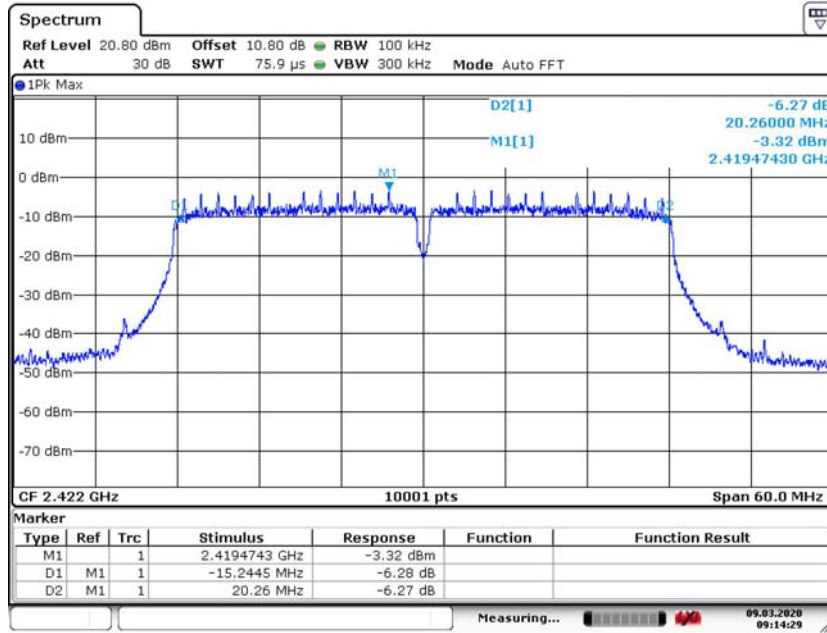


Date: 9.MAR.2020 09:14:29

Carrier frequency (MHz): 2422  
Channel No.:3  
Test Mode: 802.11n (HT40)

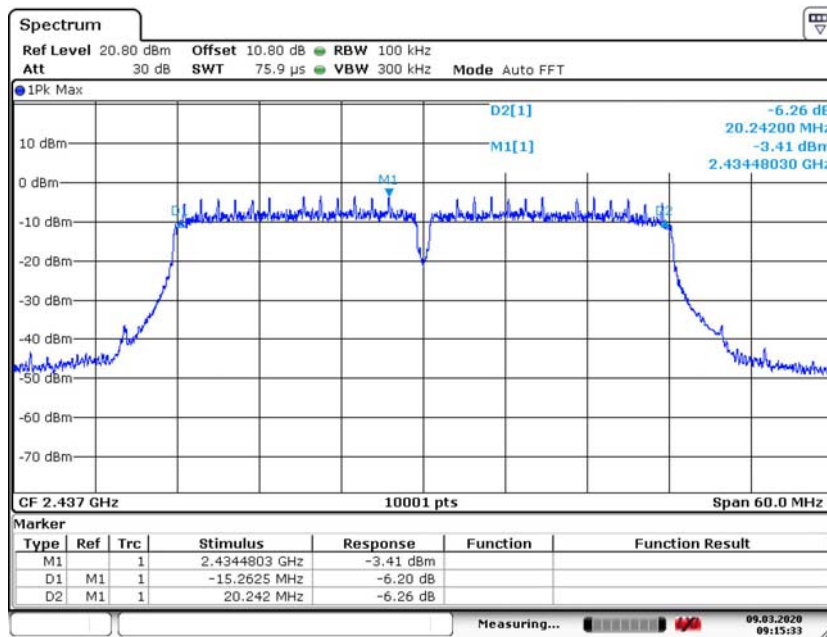

Date: 9.MAR.2020 09:15:33

Carrier frequency (MHz): 2437  
Channel No.:6  
Test Mode: 802.11n (HT40)

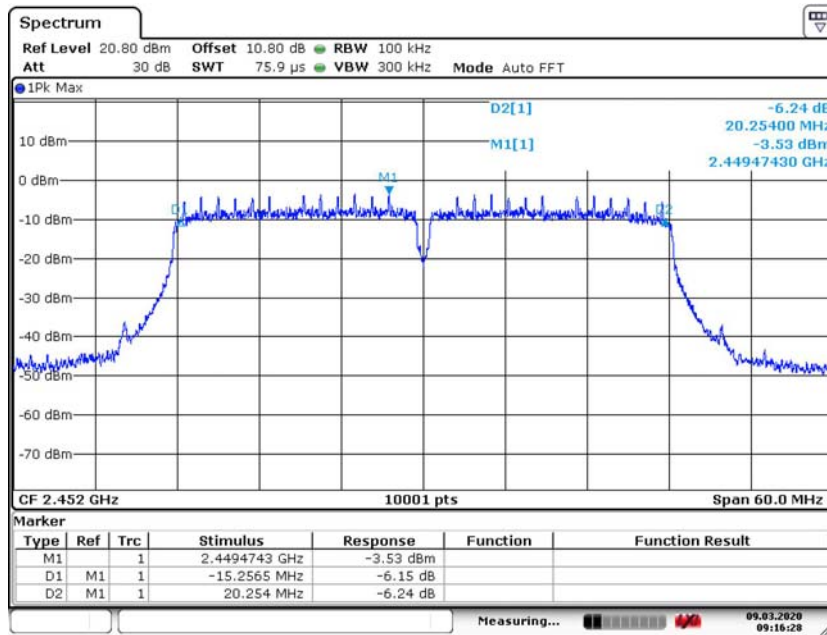

Date: 9.MAR.2020 09:16:28

Carrier frequency (MHz): 2452  
Channel No.:9  
Test Mode: 802.11n (HT40)




### Transmitter Power Spectral Density


Offset 10.8dB = Attenuator 10dB+ Temporary antenna connector loss 0.6dB+ Cable loss 0.2dB

Test Mode: 802.11b

Carrier frequency (MHz)	Channel No	Power Density (dBm)
2412	1	2.77
2437	6	2.81
2462	11	2.80

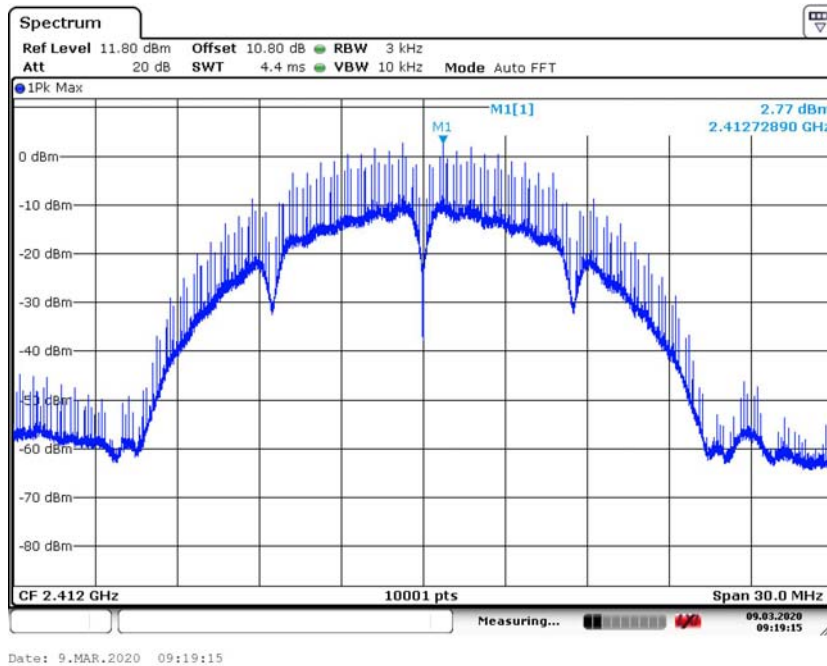


Carrier frequency (MHz): 2412  
Channel No.1  
Test Mode: 802.11b

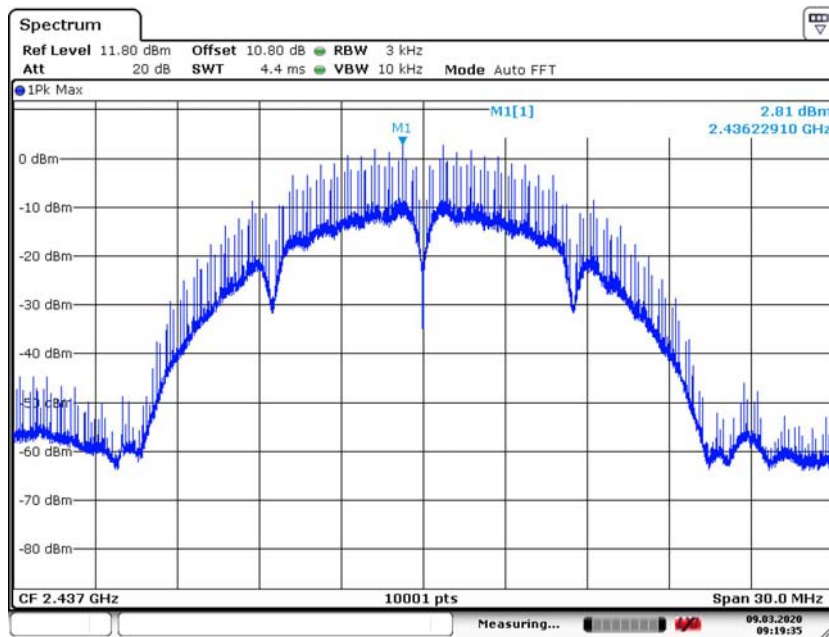

Date: 9.MAR.2020 09:19:35

Carrier frequency (MHz): 2437  
Channel No.6  
Test Mode: 802.11b

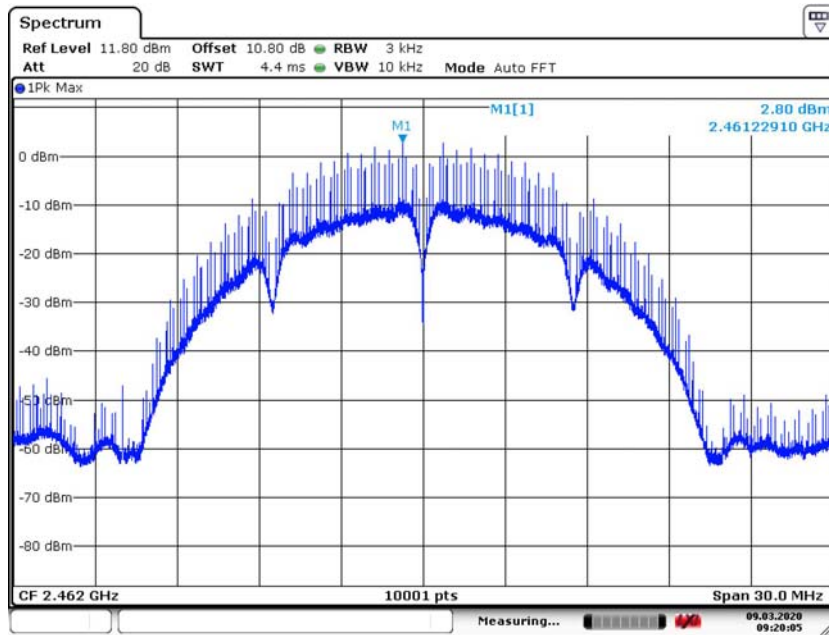


Date: 9.MAR.2020 09:20:05

Carrier frequency (MHz): 2462  
Channel No.11  
Test Mode: 802.11b


Test Mode: 802.11g

Carrier frequency (MHz)	Channel No	Power Density (dBm)
2412	1	-16.01
2442	6	-16.06
2472	11	-16.33

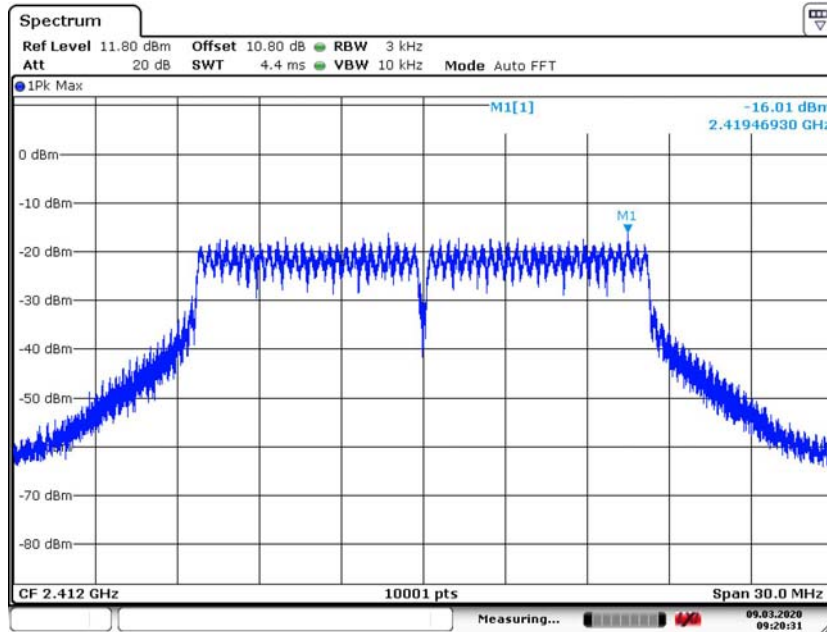


Date: 9.MAR.2020 09:20:30

Carrier frequency (MHz): 2412  
Channel No.1  
Test Mode: 802.11g

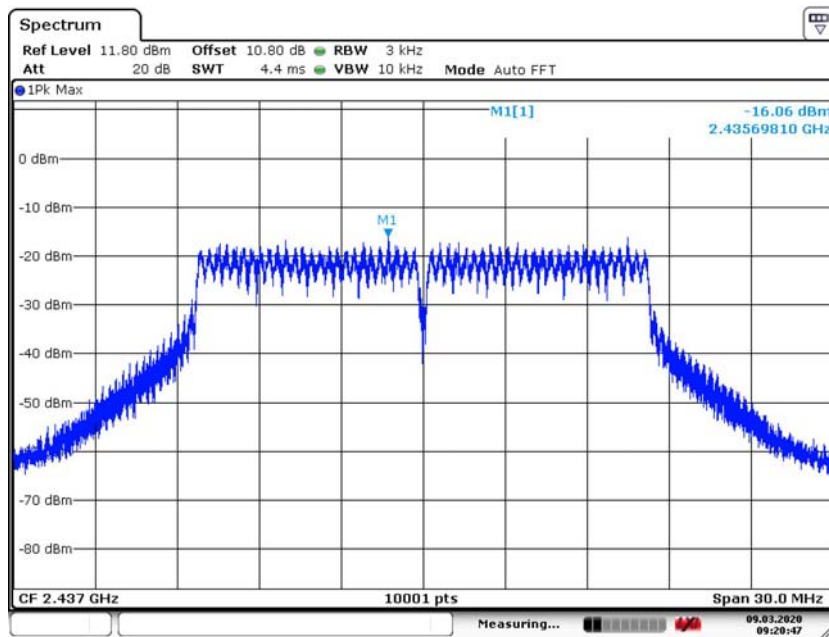


Carrier frequency (MHz): 2437  
Channel No.6  
Test Mode: 802.11g

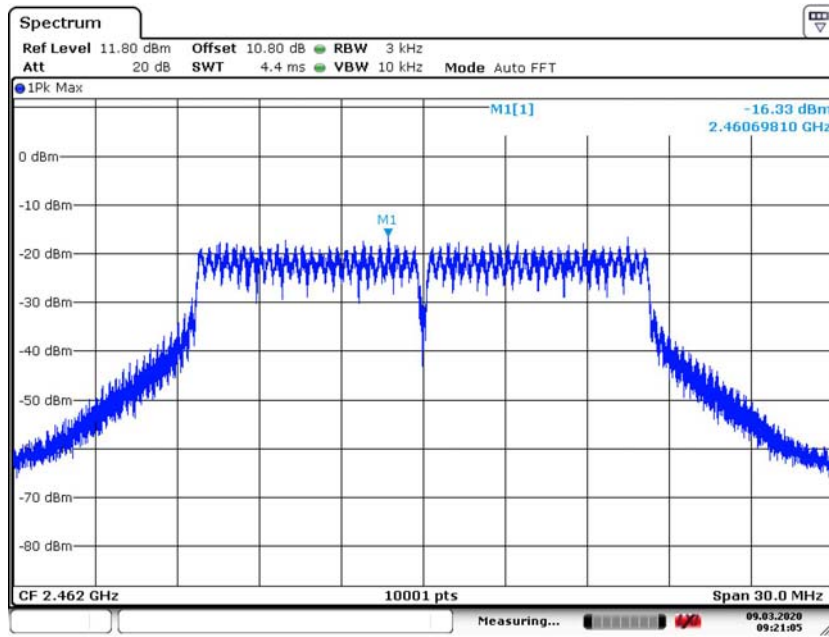

Carrier frequency (MHz): 2462  
Channel No.11  
Test Mode: 802.11g


Test Mode: 802.11n (HT20)

Carrier frequency (MHz)	Channel No	Power Density (dBm)
2412	1	-15.88
2437	6	-15.68
2462	11	-16.01

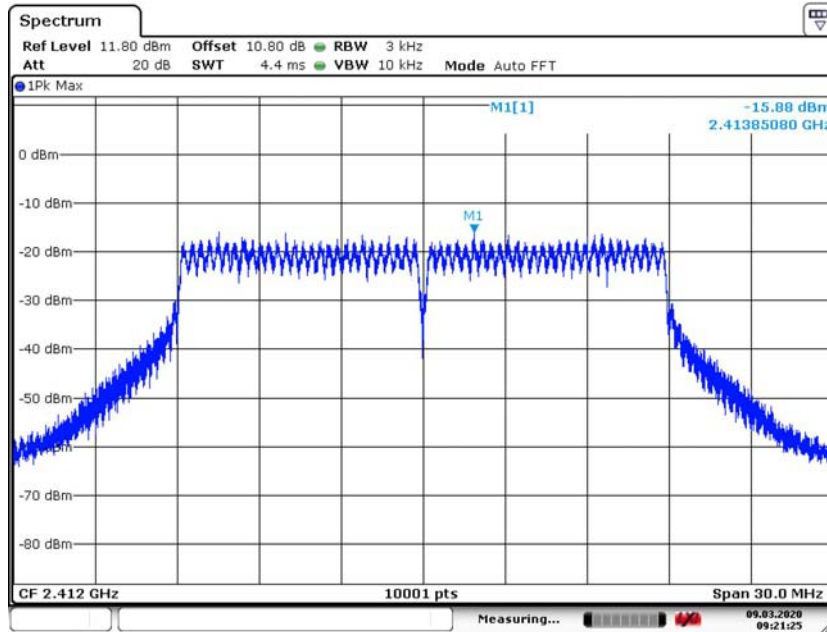


Date: 9.MAR.2020 09:21:25

Carrier frequency (MHz): 2412  
Channel No.1  
Test Mode: 802.11n (HT20)

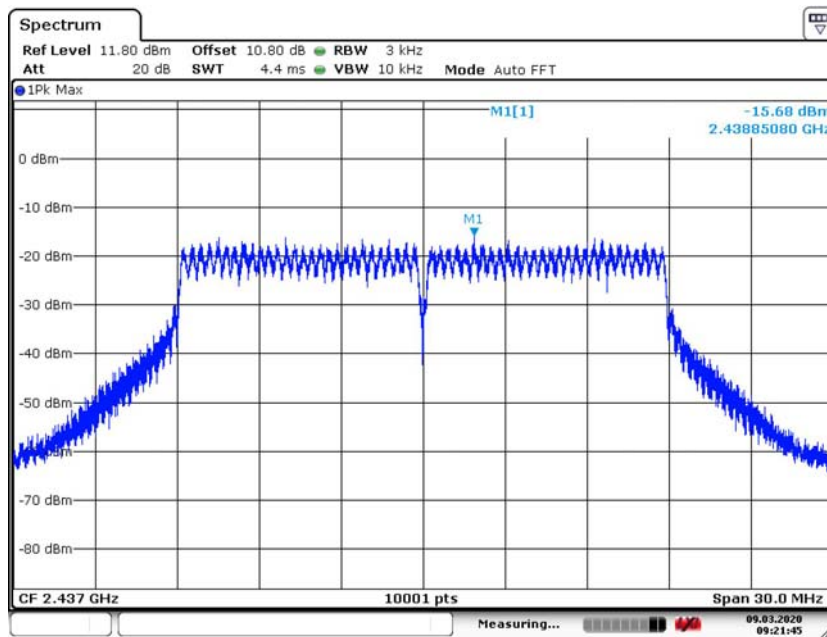


Carrier frequency (MHz): 2437  
Channel No.6  
Test Mode: 802.11n (HT20)

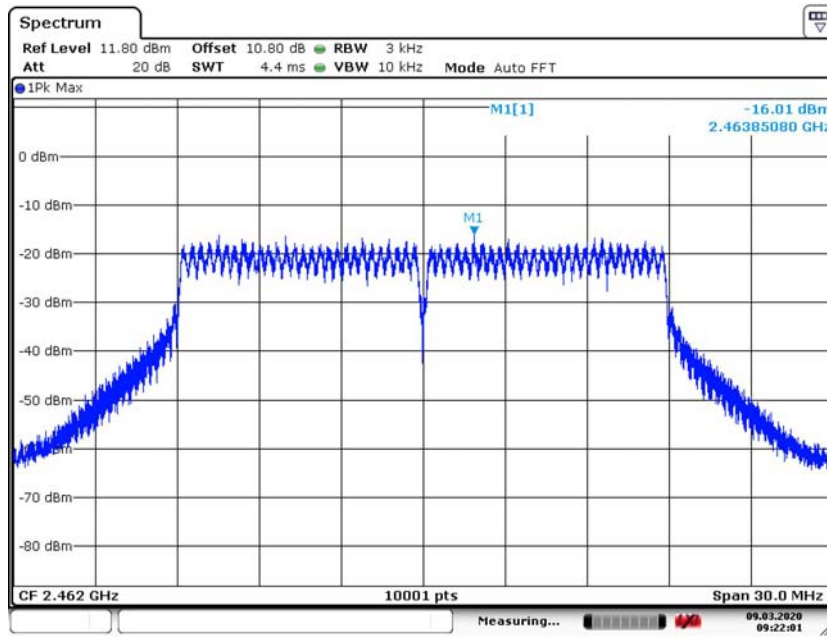


Carrier frequency (MHz): 2462  
Channel No.11  
Test Mode: 802.11n (HT20)

Test Mode: 802.11n (HT40)

Carrier frequency (MHz)	Channel No	Power Density (dBm)
2422	3	-19.10
2437	6	-18.86
2452	9	-19.14

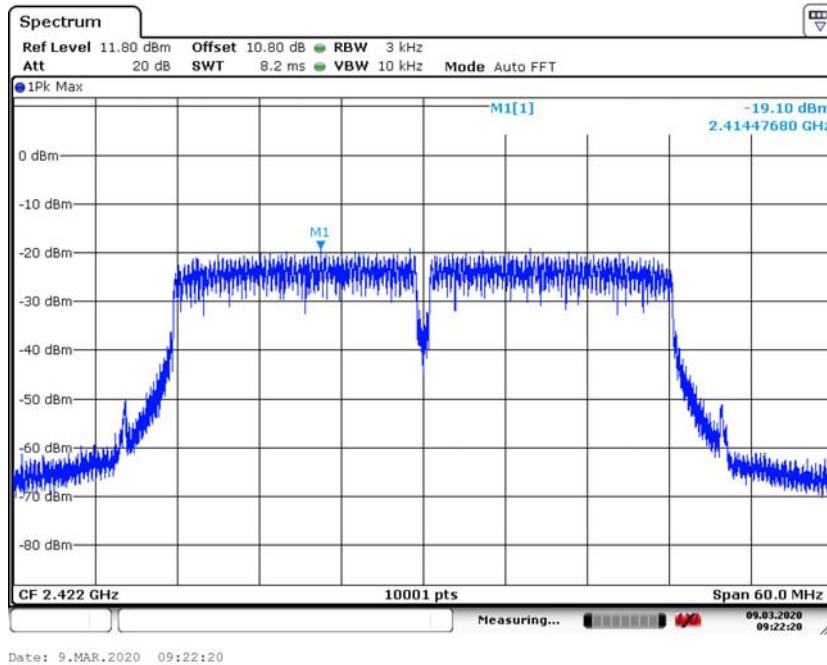


Carrier frequency (MHz): 2422  
 Channel No.3  
 Test Mode: 802.11n (HT40)

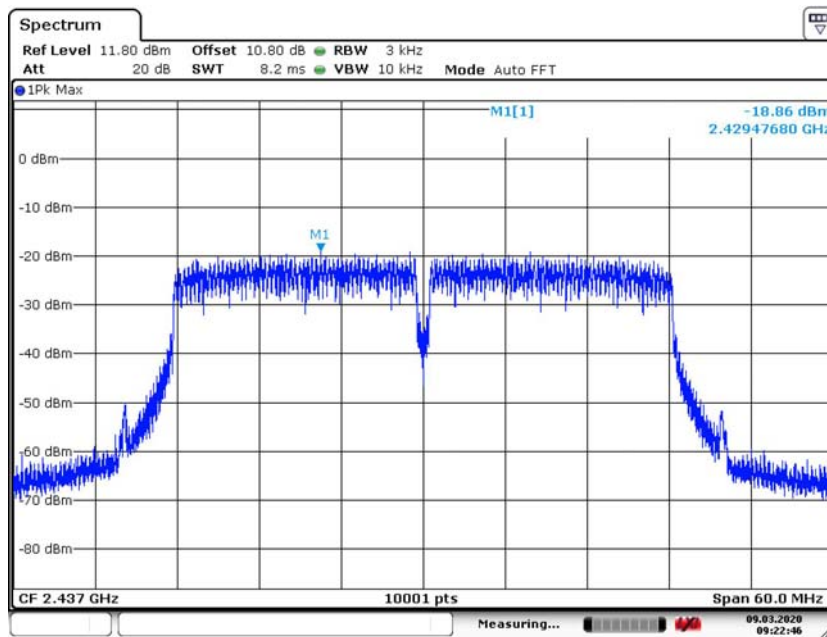

Date: 9.MAR.2020 09:22:46

Carrier frequency (MHz): 2437  
Channel No.6  
Test Mode: 802.11n (HT40)

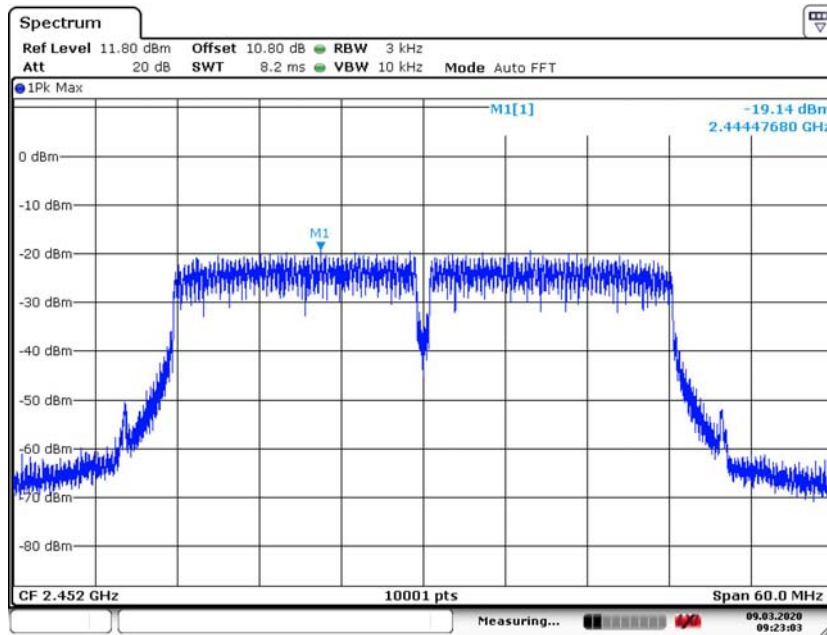

Date: 9.MAR.2020 09:23:02

Carrier frequency (MHz): 2452  
Channel No.9  
Test Mode: 802.11n (HT40)





**Conducted Out of band emission measurement**



Offset 10.8dB = Attenuator 10dB+ Temporary antenna connector loss 0.6dB+ Cable loss 0.2dB

802.11b



CH1

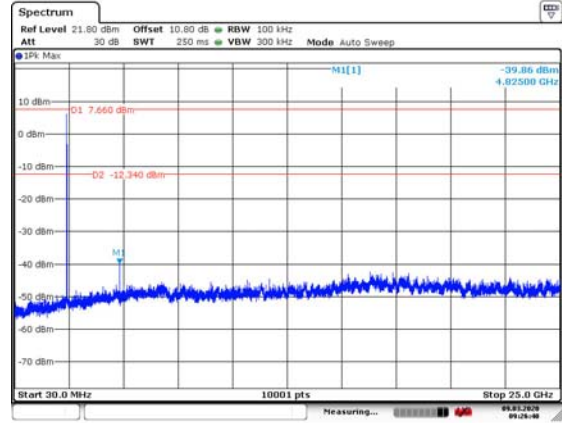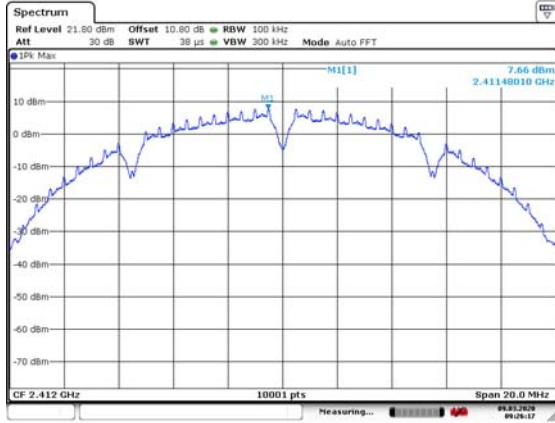

CH6

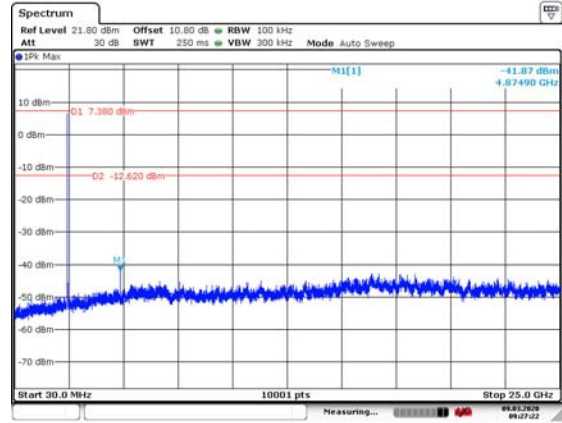
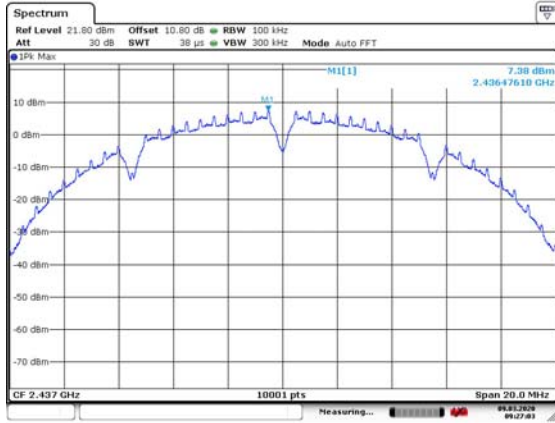


CH11

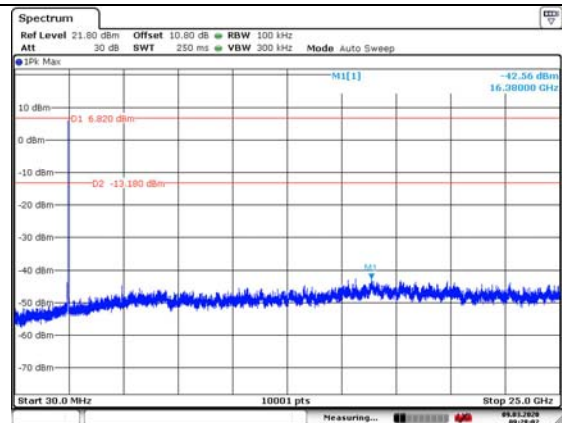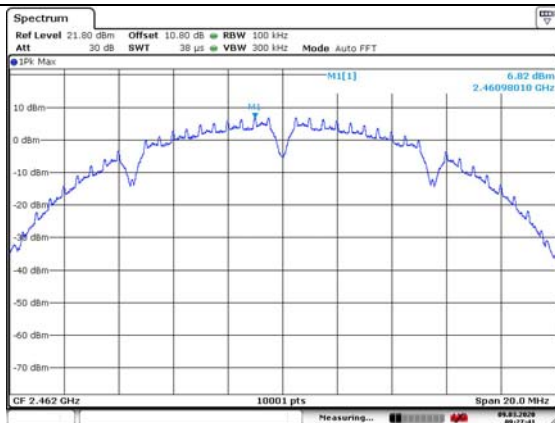

802.11g



CH1

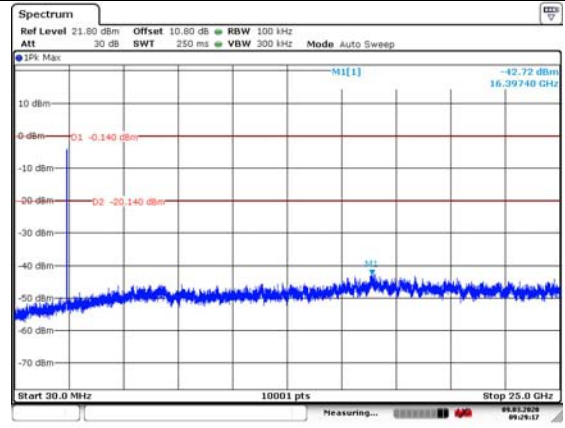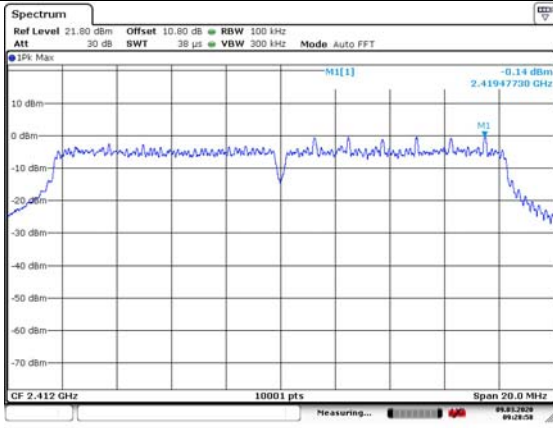

Date: 9.MAR.2020 09:28:57

Date: 9.MAR.2020 09:29:17



CH6

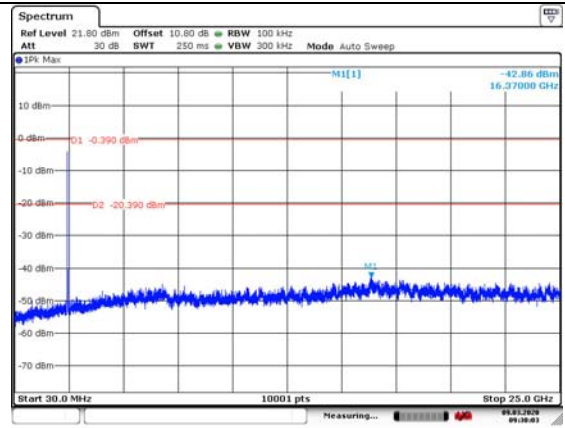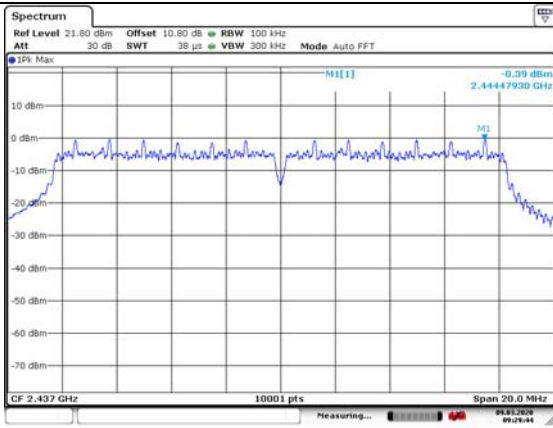

Date: 9.MAR.2020 09:29:43

Date: 9.MAR.2020 09:30:03

CH11

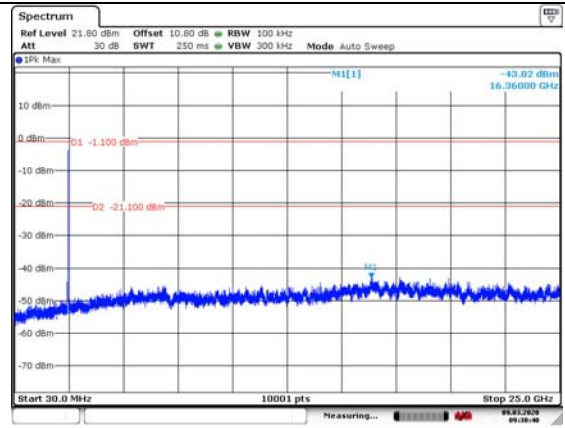
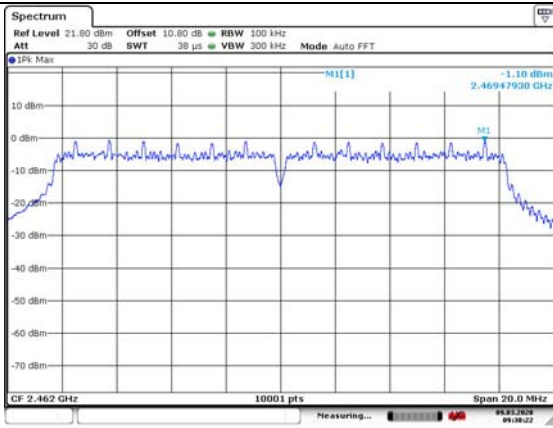


Date: 9.MAR.2020 09:30:22



Date: 9.MAR.2020 09:30:39

802.11n (HT20)



CH1

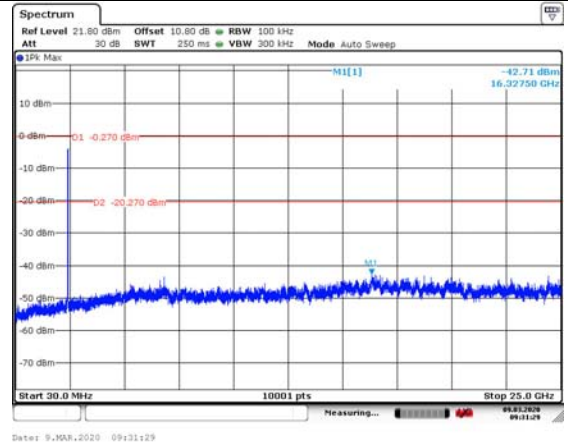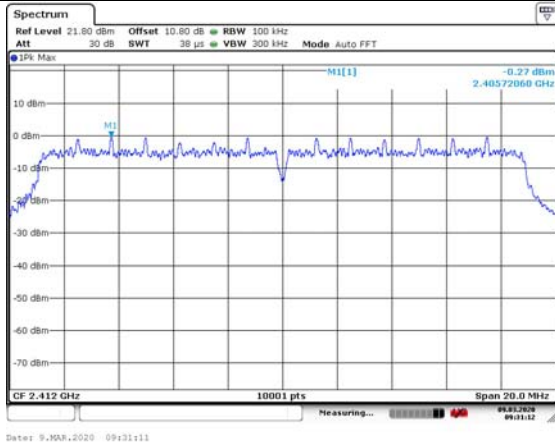

CH6

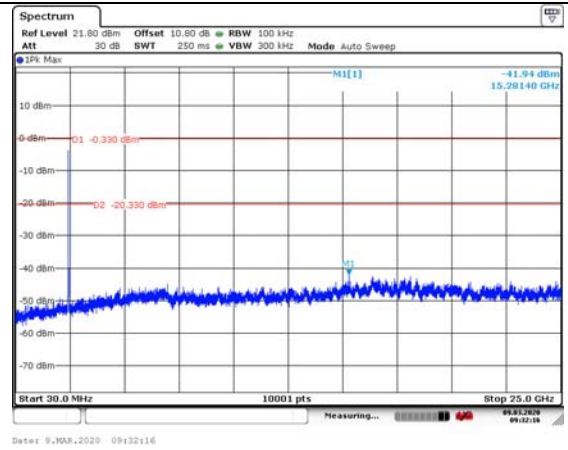
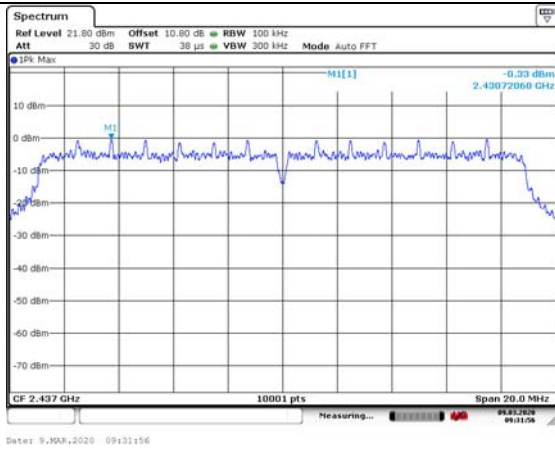


CH11

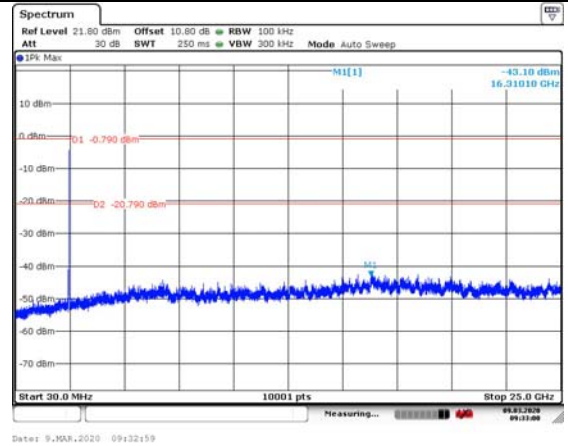
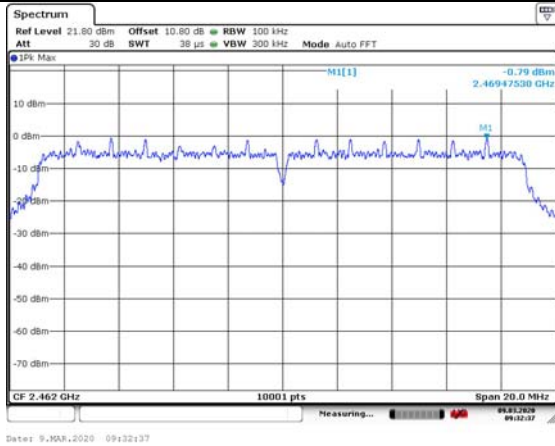


802.11n (HT40)



CH3

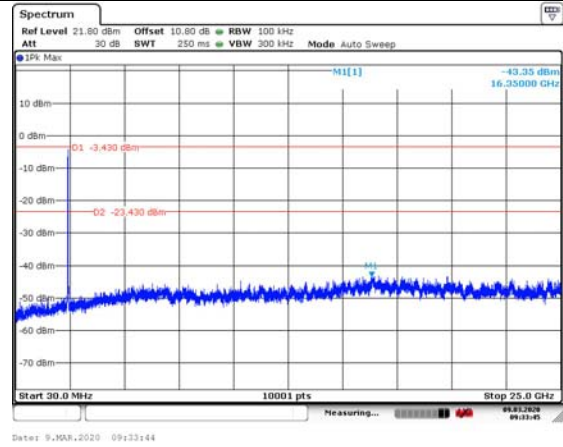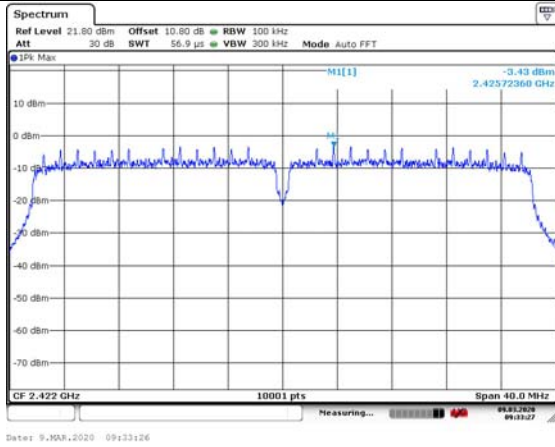

CH6

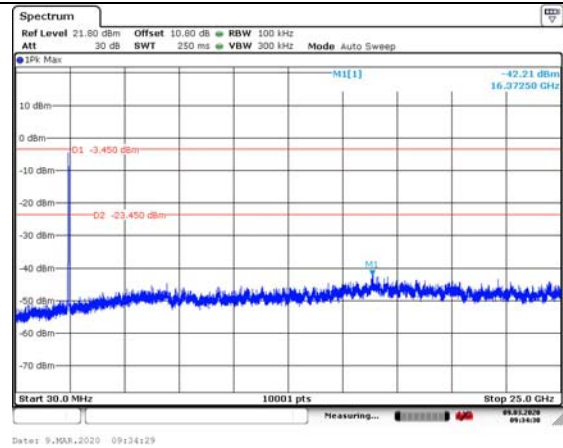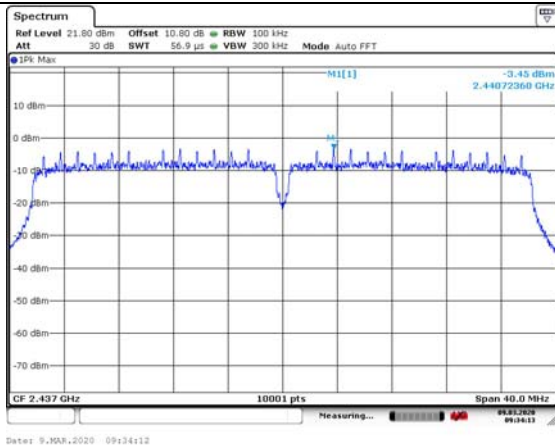

CH9

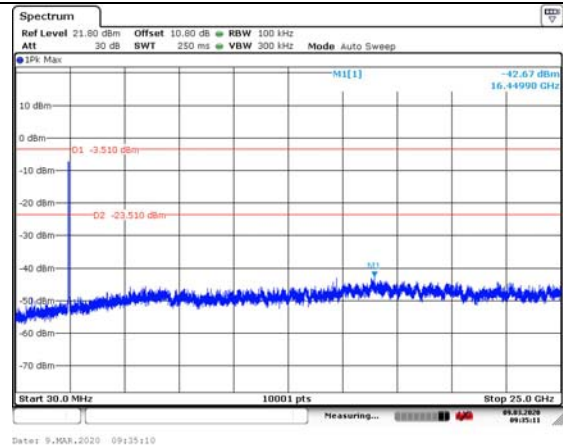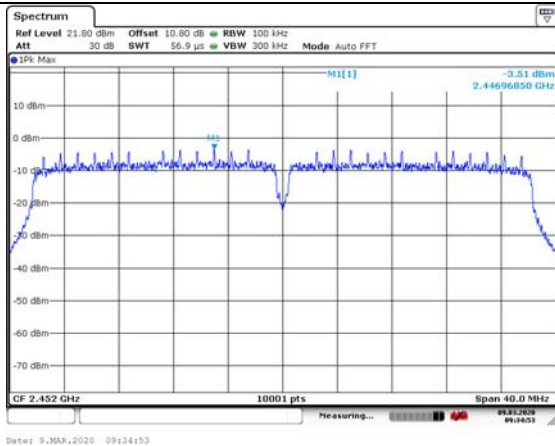


**Band edge measurement (RF Conducted measurement)**

Offset 10.8dB = Attenuator 10dB+ Temporary antenna connector loss 0.6dB+ Cable loss 0.2dB


802.11b

CH1

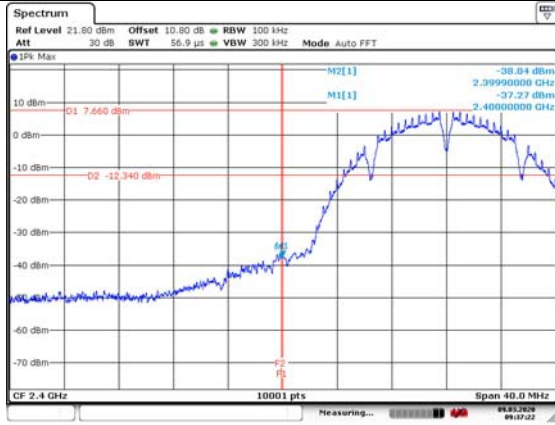

Date: 9-MAR-2020 09:17:22


CH11

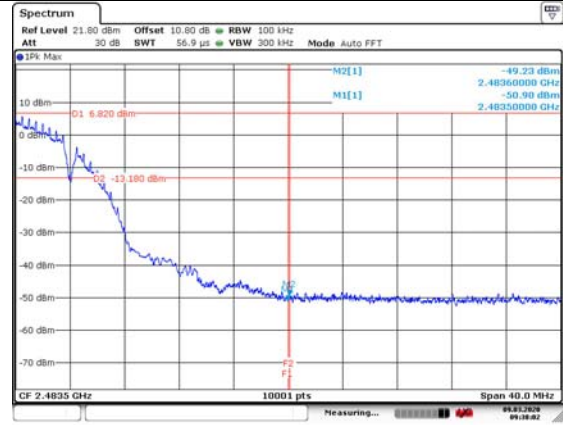

Date: 9-MAR-2020 09:18:02


802.11g

CH1

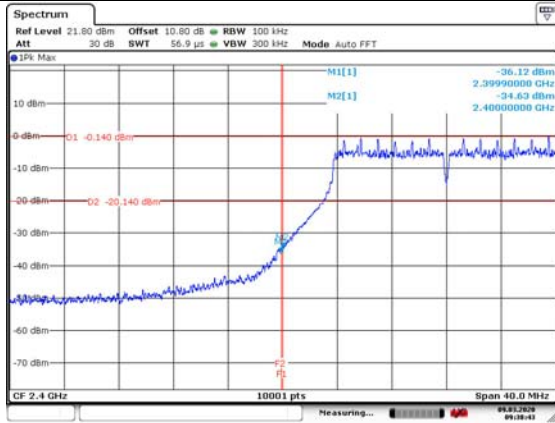

Date: 9-MAR-2020 09:18:43


CH11

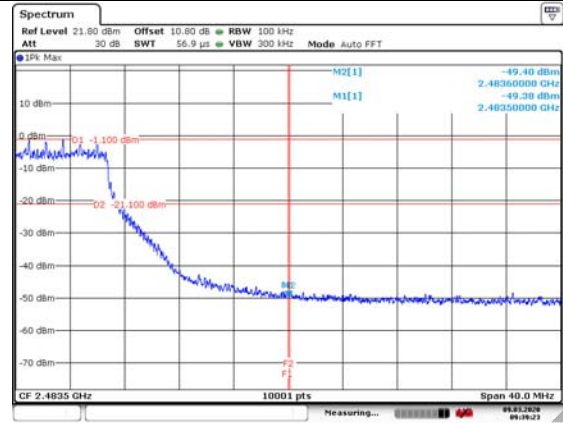


Date: 9-MAR-2020 09:19:22

802.11n (HT20)

CH1

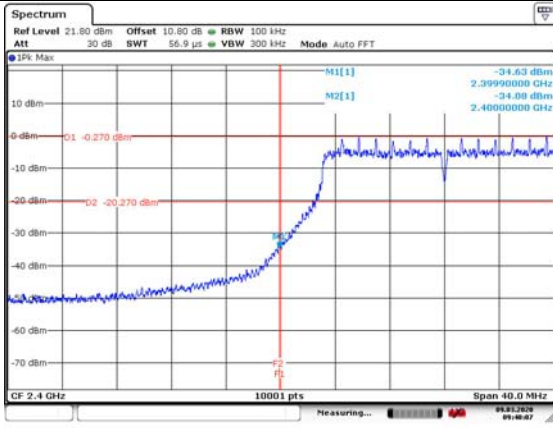


CH11

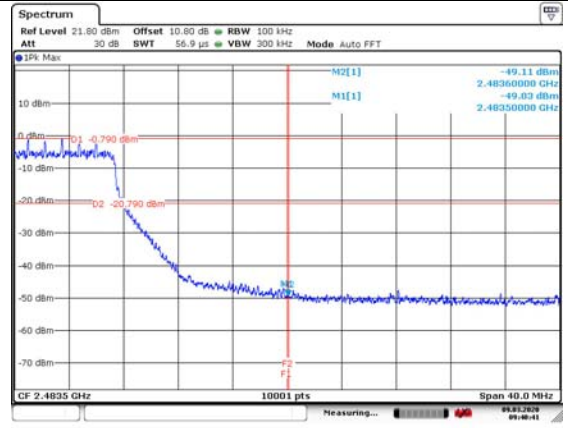


802.11n (HT40)

CH3

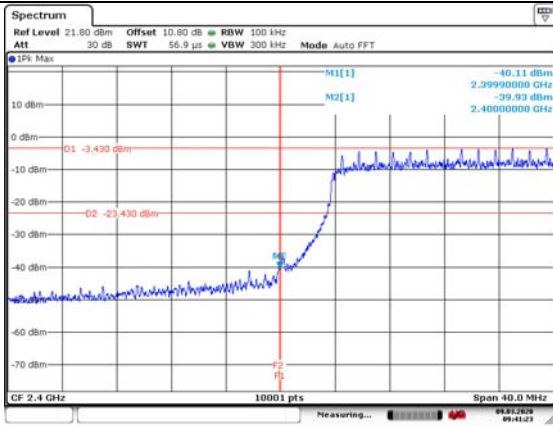

CH9

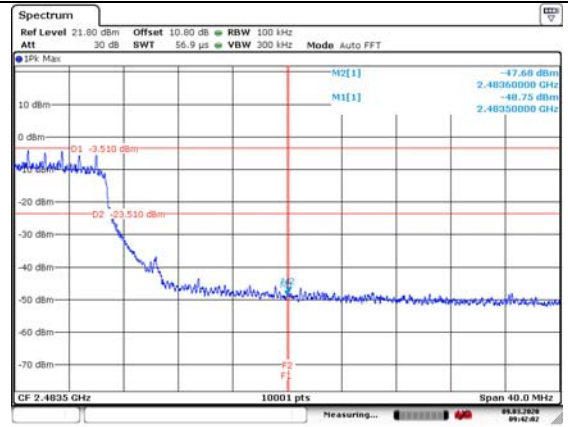

## **APPENDIX B – TEST DATA OF RADIATED EMISSION**

### **Radiated Emission Band Edge**

The worst case attitude: The EUT lay down.

The measurement results are obtained as described below:

Measure Level = Reading Level + cable loss + antenna factor

Sample calculation: (97.47 dBuV/m) = (63.47 dBμV) + (8.90 dB) + (25.10 dB), the corresponding frequency is 2412MHz.

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	97.47	63.47	N/A	N/A	8.90	25.10
2	2390	46.51	12.51	-27.49	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	93.96	59.96	N/A	N/A	8.90	25.10
2	2390	40.21	6.21	-33.79	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	83.90	49.90	N/A	N/A	8.90	25.10
2	2390	33.25	-0.75	-20.75	54.00	8.90	25.10

Carrier frequency (MHz): 2412  
Channel No.:1  
Test Mode: 802.11b  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	84.07	50.07	N/A	N/A	8.90	25.10
2	2390	33.80	-0.20	-20.20	54.00	8.90	25.10

Carrier frequency (MHz): 2462  
Channel No.:11  
Test Mode: 802.11b  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	96.16	62.16	N/A	N/A	8.90	25.10
2	2483.5	46.01	12.01	-27.99	74.00	8.90	25.10

Carrier frequency (MHz): 2462  
Channel No.:11  
Test Mode: 802.11b  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	92.73	58.73	N/A	N/A	8.90	25.10
2	2483.5	40.84	6.84	-33.16	74.00	8.90	25.10

Carrier frequency (MHz): 2462  
Channel No.:11  
Test Mode: 802.11b  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	86.57	52.57	N/A	N/A	8.90	25.10
2	2483.5	32.79	-1.21	-21.21	54.00	8.90	25.10

Carrier frequency (MHz): 2462



Channel No.:11  
Test Mode: 802.11b  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	83.44	49.44	N/A	N/A	8.90	25.10
2	2483.5	32.02	-1.98	-21.98	54.00	8.90	25.10

Carrier frequency (MHz): 2412  
Channel No.:1  
Test Mode: 802.11g  
Polarity: Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	97.38	63.38	N/A	N/A	8.90	25.10
2	2390	43.81	9.81	-30.19	74.00	8.90	25.10

Carrier frequency (MHz): 2412  
Channel No.:1  
Test Mode: 802.11g  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	93.35	59.35	N/A	N/A	8.90	25.10
2	2390	40.75	6.75	-33.25	74.00	8.90	25.10

Carrier frequency (MHz): 2412  
Channel No.:1  
Test Mode: 802.11g  
Polarity: Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	85.61	51.61	N/A	N/A	8.90	25.10
2	2390	33.42	-0.58	-20.58	54.00	8.90	25.10

Carrier frequency (MHz): 2412  
Channel No.:1  
Test Mode: 802.11g  
Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	81.21	47.21	N/A	N/A	8.90	25.10
2	2390	32.19	-1.81	-21.81	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11g

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	96.51	62.51	N/A	N/A	8.90	25.10
2	2483.5	44.52	10.52	-29.48	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11g

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	93.06	59.06	N/A	N/A	8.90	25.10
2	2483.5	39.89	5.89	-34.11	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11g

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	85.36	51.36	N/A	N/A	8.90	25.10
2	2483.5	32.92	-1.08	-21.08	54.00	8.90	25.10

Carrier frequency (MHz): 2462  
Channel No.:11  
Test Mode: 802.11g  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	80.17	46.17	N/A	N/A	8.90	25.10
2	2483.5	33.30	-0.70	-20.70	54.00	8.90	25.10

Carrier frequency (MHz): 2412  
Channel No.:1  
Test Mode: 802.11n(HT20)  
Polarity: Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	97.07	63.07	N/A	N/A	8.90	25.10
2	2390	45.68	11.68	-28.32	74.00	8.90	25.10

Carrier frequency (MHz): 2412  
Channel No.:1  
Test Mode: 802.11n(HT20)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	92.04	58.04	N/A	N/A	8.90	25.10
2	2390	40.35	6.35	-33.65	74.00	8.90	25.10

Carrier frequency (MHz): 2412  
Channel No.:1  
Test Mode: 802.11n(HT20)  
Polarity: Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	83.36	49.36	N/A	N/A	8.90	25.10
2	2390	33.87	-0.13	-20.13	54.00	8.90	25.10

Carrier frequency (MHz): 2412  
Channel No.:1

Test Mode: 802.11n(HT20)

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	81.59	47.59	N/A	N/A	8.90	25.10
2	2390	32.73	-1.27	-21.27	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.: 11

Test Mode: 802.11n(HT20)

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	94.85	60.85	N/A	N/A	8.90	25.10
2	2483.5	42.36	8.36	-31.64	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.: 11

Test Mode: 802.11n(HT20)

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	91.15	57.15	N/A	N/A	8.90	25.10
2	2483.5	39.05	5.05	-34.95	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.: 11

Test Mode: 802.11n(HT20)

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	83.81	49.81	N/A	N/A	8.90	25.10
2	2483.5	31.73	-2.27	-22.27	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.: 11

Test Mode: 802.11n(HT20)

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	80.23	46.23	N/A	N/A	8.90	25.10
2	2483.5	30.72	-3.28	-23.28	54.00	8.90	25.10

Carrier frequency (MHz): 2422

Channel No.:3

Test Mode: 802.11n(HT40)

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2422	84.36	50.36	N/A	N/A	8.90	25.10
2	2390	32.81	-1.19	-41.19	74.00	8.90	25.10

Carrier frequency (MHz): 2422

Channel No.:3

Test Mode: 802.11n(HT40)

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2422	79.16	45.16	N/A	N/A	8.90	25.10
2	2390	28.00	-6.00	-46.00	74.00	8.90	25.10

Carrier frequency (MHz): 2422

Channel No.:3

Test Mode: 802.11n(HT40)

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2422	70.84	36.84	N/A	N/A	8.90	25.10
2	2390	20.63	-13.37	-33.37	54.00	8.90	25.10

Carrier frequency (MHz): 2422

Channel No.:3

Test Mode: 802.11n(HT40)

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2422	70.37	36.37	N/A	N/A	8.90	25.10
2	2390	19.53	-14.47	-34.47	54.00	8.90	25.10

Carrier frequency (MHz): 2452  
Channel No.:9  
Test Mode: 802.11n(HT40)  
Polarity: Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2452	87.94	53.94	N/A	N/A	8.90	25.10
2	2483.5	33.24	-0.76	-40.76	74.00	8.90	25.10

Carrier frequency (MHz): 2452  
Channel No.:9  
Test Mode: 802.11n(HT40)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2452	81.52	47.52	N/A	N/A	8.90	25.10
2	2483.5	28.79	-5.21	-45.21	74.00	8.90	25.10

Carrier frequency (MHz): 2452  
Channel No.:9  
Test Mode: 802.11n(HT40)  
Polarity: Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2452	72.01	38.01	N/A	N/A	8.90	25.10
2	2483.5	21.40	-12.60	-32.60	54.00	8.90	25.10

Carrier frequency (MHz): 2452  
Channel No.9  
Test Mode: 802.11n(HT40)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2452	69.19	35.19	N/A	N/A	8.90	25.10
2	2483.5	21.60	-12.40	-32.40	54.00	8.90	25.10

### Sample Calculations

#### Determining Spurious Emissions Levels

A “reference path loss” is established and the  $A_{Rpl}$  is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{mea}} + A_{Rpl}$$

Sample calculation:  $(26.75 \text{ dB}\mu\text{V/m}) = (44.95 \text{ dB}\mu\text{V}) + (-18.2 \text{ dB/m})$ , the corresponding frequency is 39.700000MHz.

The worst case attitude: The EUT lay down.

#### For 802.11b Channel No.:1

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.700000	26.75	-18.2	44.95	Vertical	40.00
44.259000	22.79	-17.6	40.39	Vertical	40.00
96.008500	28.43	-19.4	47.83	Vertical	43.50
98.288000	28.32	-18.9	47.22	Vertical	43.50
192.038500	23.63	-19.0	42.63	Vertical	43.50
271.675500	38.34	-15.9	54.24	Vertical	46.00

#### For 802.11g Channel No.:1

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
37.469000	28.23	-18.9	47.13	Vertical	40.00
41.931000	23.42	-17.9	41.32	Vertical	40.00
65.502000	20.13	-20.2	40.33	Vertical	40.00
95.960000	27.09	-19.4	46.49	Vertical	43.50
98.239500	28.22	-18.9	47.12	Vertical	43.50
269.347500	36.86	-15.9	52.76	Vertical	46.00

For 802.11n(HT20) Channel No.:1

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.069500	25.01	-18.4	43.41	Vertical	40.00
67.878500	19.58	-21.0	40.58	Vertical	40.00
98.288000	28.24	-18.9	47.14	Vertical	43.50
169.728500	20.06	-20.7	40.76	Vertical	43.50
192.038500	23.50	-19.0	42.5	Vertical	43.50
269.153500	35.63	-15.9	51.53	Vertical	46.00

For 802.11b Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.603000	26.15	-18.3	44.45	Vertical	40.00
42.125000	24.18	-17.9	42.08	Vertical	40.00
44.404500	23.52	-17.6	41.12	Vertical	40.00
54.880500	13.86	-17.8	31.66	Vertical	40.00
98.336500	28.54	-18.9	47.44	Vertical	43.50
271.530000	36.17	-15.9	52.07	Vertical	46.00

For 802.11g Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.312000	25.43	-18.4	43.83	Vertical	40.00
95.960000	26.84	-19.4	46.24	Vertical	43.50
98.045500	25.40	-19.0	44.4	Vertical	43.50
271.578500	36.42	-15.9	52.32	Vertical	46.00
290.348000	34.36	-15.4	49.76	Vertical	46.00
304.510000	30.05	-15.0	45.05	Vertical	46.00

For 802.11n(HT20) Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
34.947000	23.35	-19.7	43.05	Vertical	40.00
37.372000	26.50	-19.0	45.5	Vertical	40.00
95.863000	25.99	-19.4	45.39	Vertical	43.50
97.948500	24.97	-19.0	43.97	Vertical	43.50
192.087000	23.10	-19.0	42.1	Vertical	43.50
271.675500	37.58	-15.9	53.48	Vertical	46.00



For 802.11b Channel No.:11

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
34.898500	22.77	-19.7	42.47	Vertical	40.00
37.420500	26.34	-19.0	45.34	Vertical	40.00
42.125000	24.05	-17.9	41.95	Vertical	40.00
98.239500	27.74	-18.9	46.64	Vertical	43.50
276.719500	32.48	-15.8	48.28	Vertical	46.00
287.971500	32.60	-15.5	48.1	Vertical	46.00

For 802.11g Channel No.:11

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
35.092500	25.33	-19.7	45.03	Vertical	40.00
39.651500	26.26	-18.3	44.56	Vertical	40.00
96.008500	27.91	-19.4	47.31	Vertical	43.50
96.881500	20.85	-19.2	40.05	Vertical	43.50
273.906500	35.58	-15.9	51.48	Vertical	46.00
290.445000	35.49	-15.4	50.89	Vertical	46.00

For 802.11n(HT20) Channel No.:11

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.700000	26.71	-18.2	44.91	Vertical	40.00
41.979500	24.30	-17.9	42.2	Vertical	40.00
58.518000	19.65	-18.2	37.85	Vertical	40.00
98.288000	27.51	-18.9	46.41	Vertical	43.50
271.530000	35.94	-15.9	51.84	Vertical	46.00
297.526000	31.05	-15.2	46.25	Vertical	46.00

For 802.11n(HT40) Channel No.:3

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.409000	25.81	-18.3	44.11	Vertical	40.00
96.008500	27.85	-19.4	47.25	Vertical	43.50
97.754500	24.03	-19.0	43.03	Vertical	43.50
167.352000	19.24	-20.8	40.04	Vertical	43.50
194.366500	21.56	-18.8	40.36	Vertical	43.50
276.331500	35.38	-15.8	51.18	Vertical	46.00


For 802.11n(HT40) Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
35.092500	25.35	-19.7	45.05	Vertical	40.00
37.469000	28.19	-18.9	47.09	Vertical	40.00
46.829500	23.45	-17.4	40.85	Vertical	40.00
271.675500	37.54	-15.9	53.44	Vertical	46.00
285.740500	33.25	-15.6	48.85	Vertical	46.00
297.235000	31.55	-15.2	46.75	Vertical	46.00


For 802.11n(HT40) Channel No.:9

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
34.898500	22.70	-19.7	42.4	Vertical	40.00
37.469000	28.18	-18.9	47.08	Vertical	40.00
39.651500	26.22	-18.3	44.52	Vertical	40.00
96.057000	28.04	-19.4	47.44	Vertical	43.50
269.396000	36.32	-15.9	52.22	Vertical	46.00
285.692000	32.80	-15.6	48.4	Vertical	46.00

Carrier frequency (MHz): 2412  
Channel No.:1

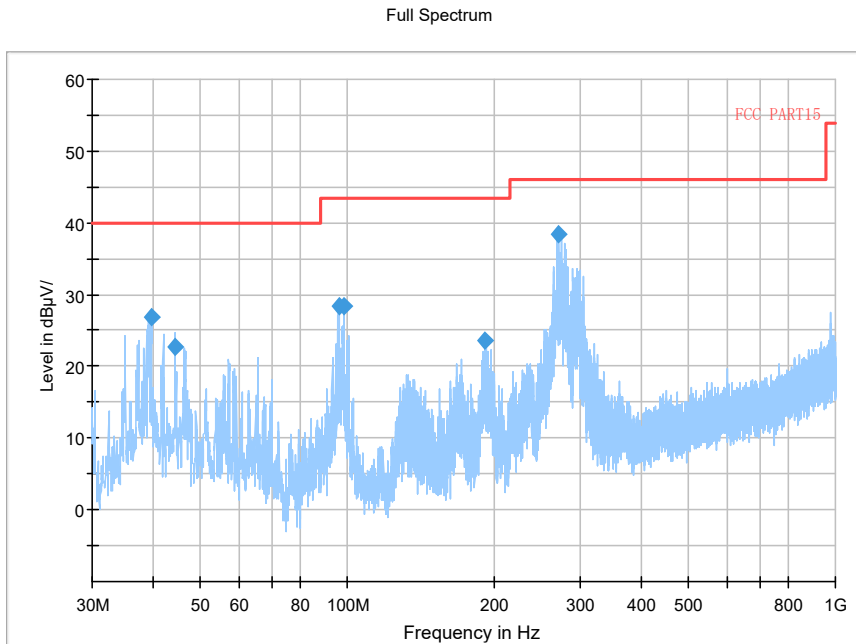


Frequency Range: 30MHz -1GHz  
Detector: QP mode  
Test Mode: 802.11b

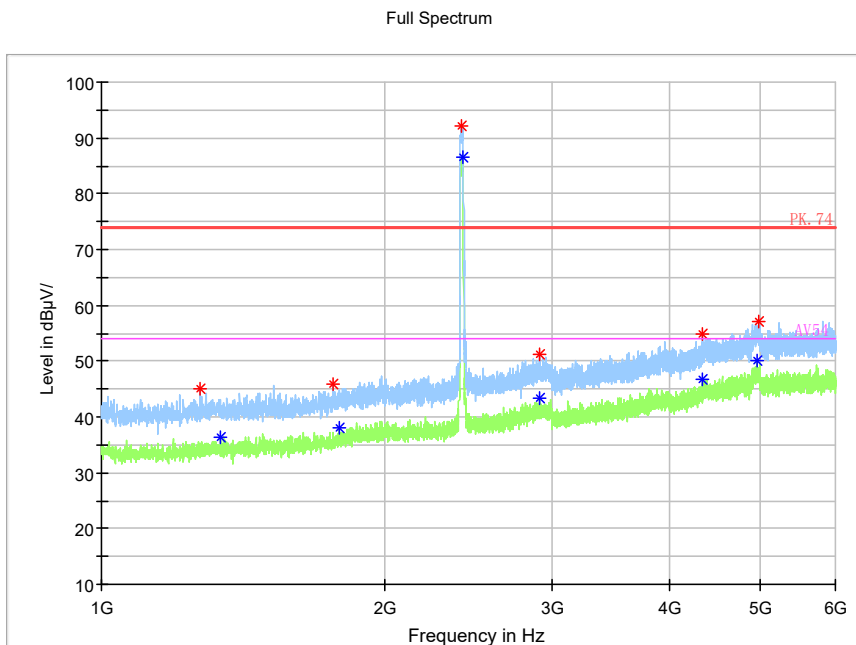


Frequency Range: 1GHz -6GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11b

Full Spectrum

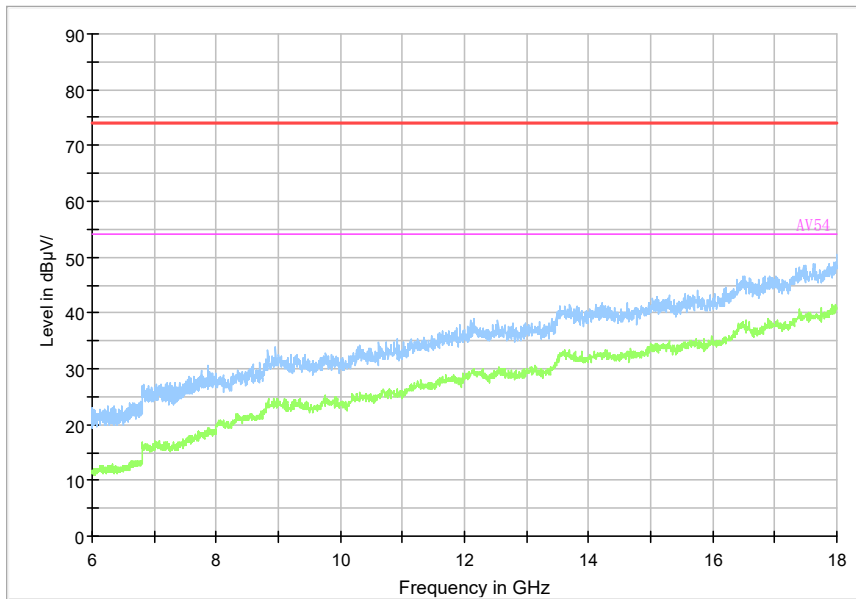


Frequency Range: 6GHz -18GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11b

Full Spectrum

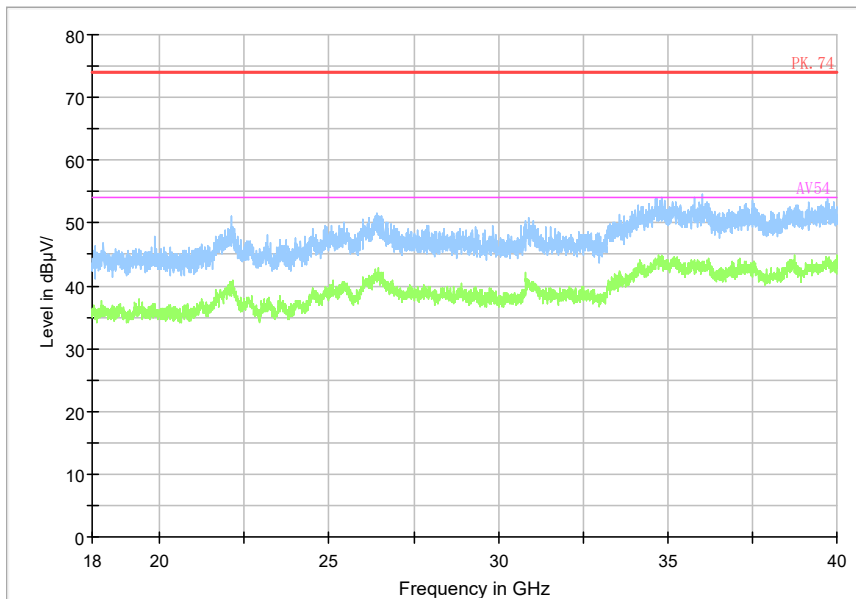


Frequency Range: 18GHz -40GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11b

Full Spectrum

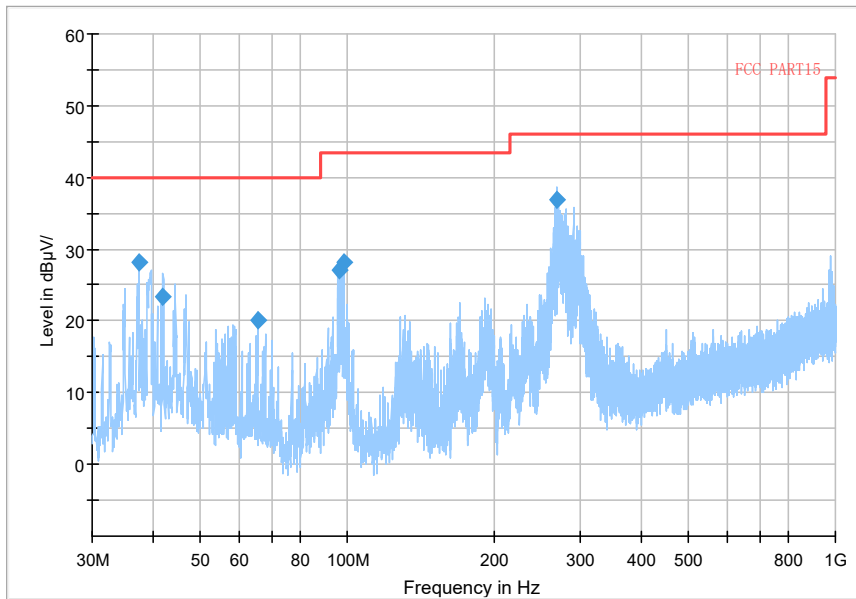


Frequency Range: 30MHz -1GHz  
Detector: QP mode  
Modulation type: 802.11g

Full Spectrum

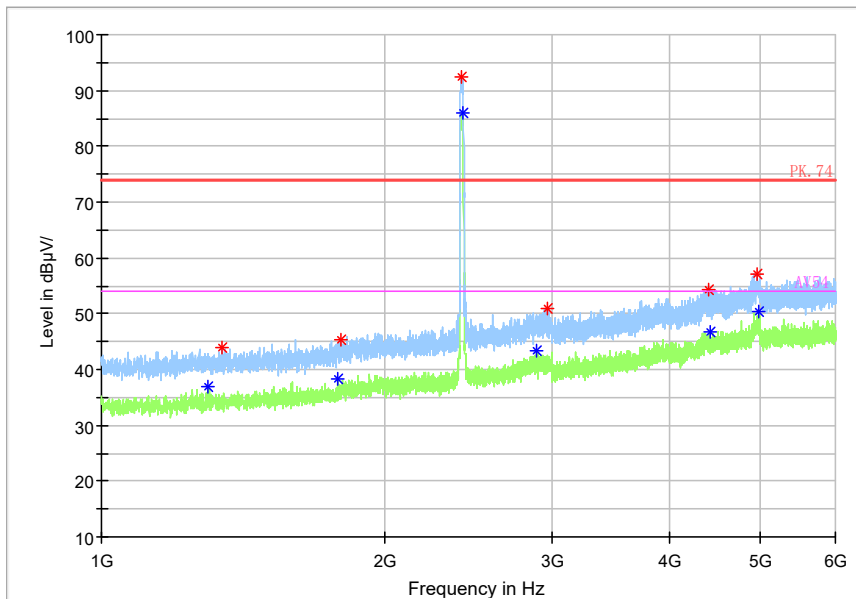


Frequency Range: 1GHz -6GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11g

Full Spectrum

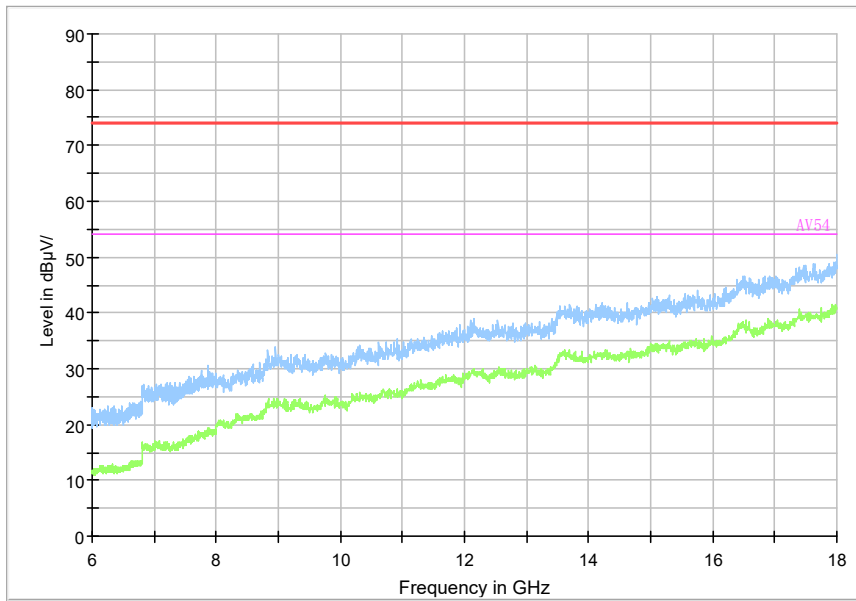


Frequency Range: 6GHz -18GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11g

Full Spectrum

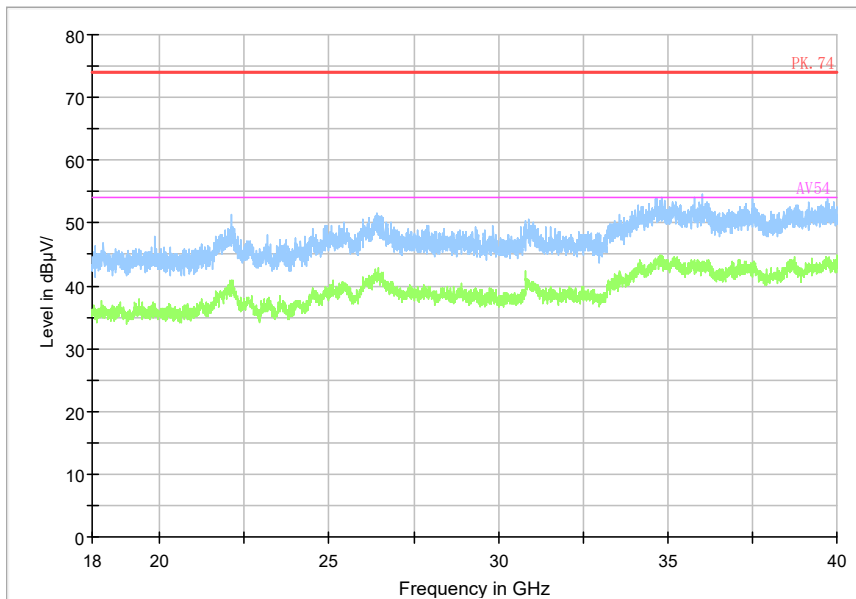


Frequency Range: 18GHz -40GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11g

Full Spectrum

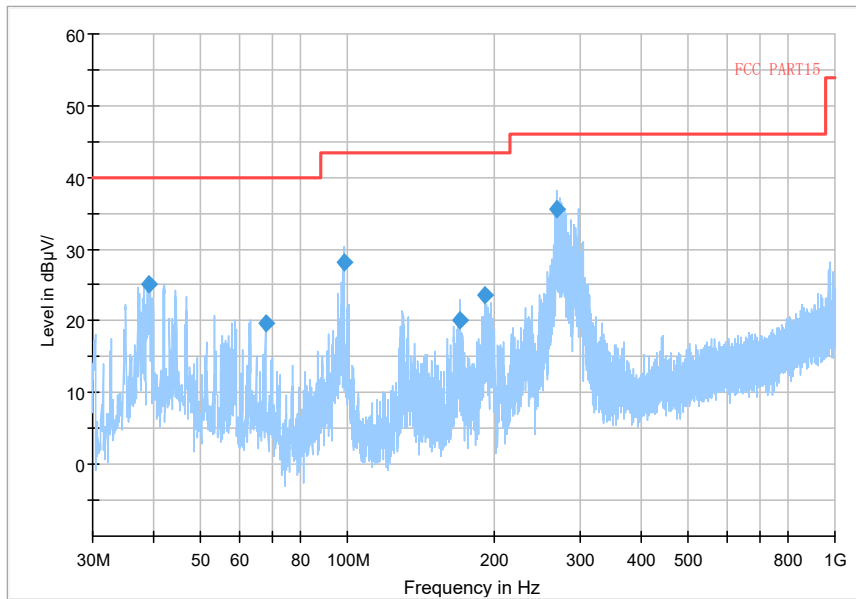


Frequency Range: 30MHz -1GHz  
Detector: QP mode  
Test Mode: 802.11n(HT20)

Full Spectrum

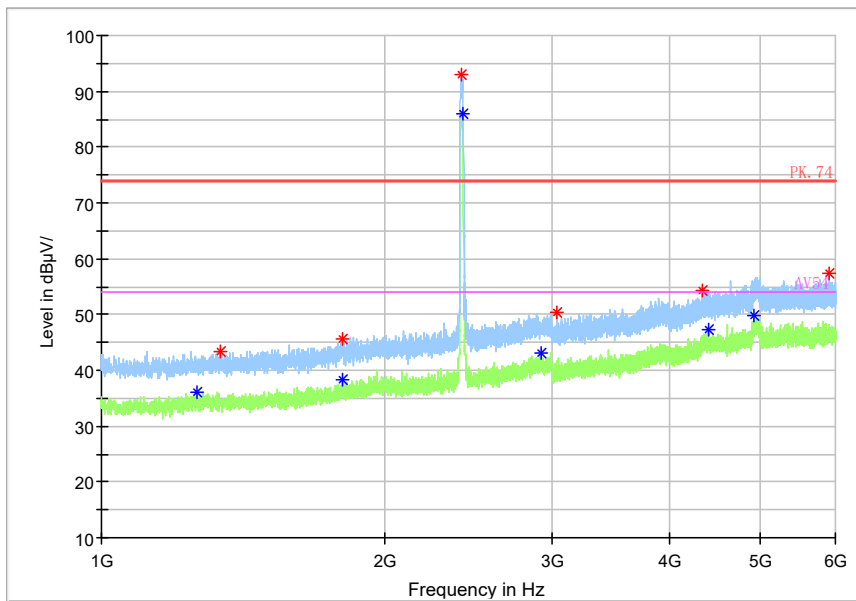

Frequency Range: 1GHz -6GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11n(HT20)

Full Spectrum

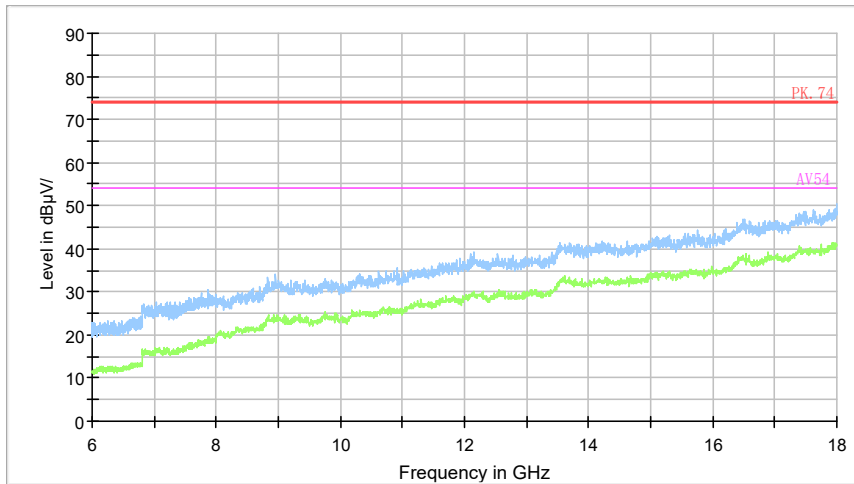


- Preview Result 2-AVG
- Preview Result 1-PK+
- PK.74
- Critical\_Freqs AVG AV54
- \* Critical\_Freqs PK+
- \* Final\_Result PK+
- ♦ Final\_Result AVG

Comment

Frequency Range: 6GHz -18GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11n(HT20)

Full Spectrum

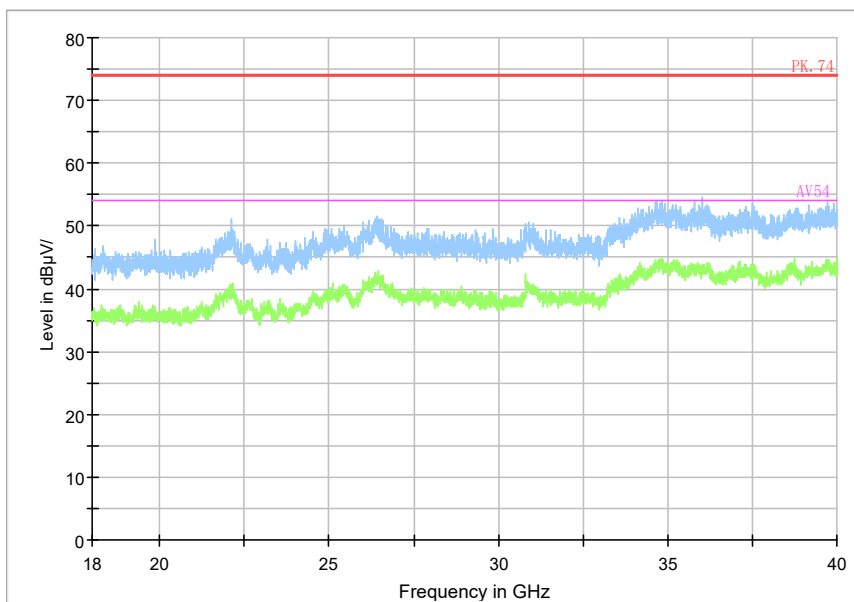


Frequency Range: 18GHz -40GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11n(HT20)




Carrier frequency (MHz): 2437  
Channel No.:6

Full Spectrum

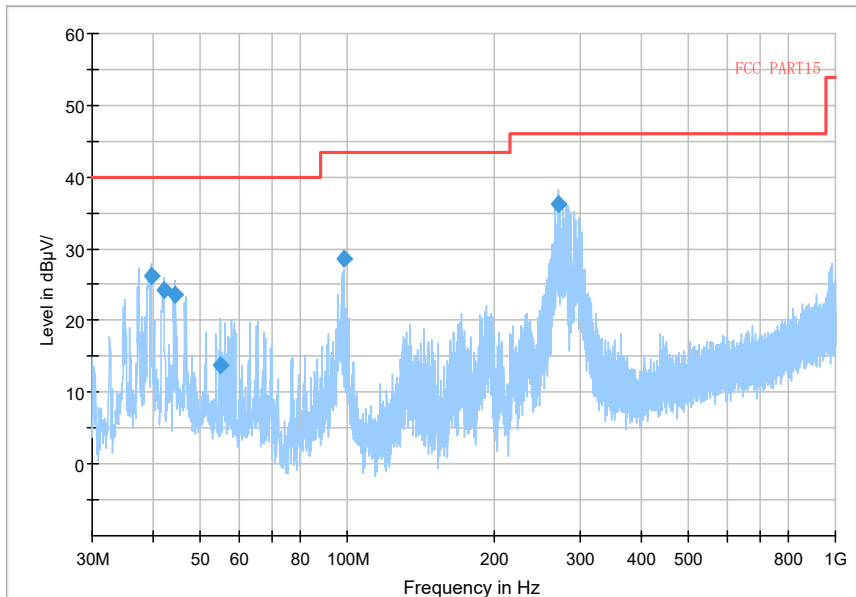


Frequency Range: 30MHz -1GHz  
Detector: QP mode  
Test Mode: 802.11b

Full Spectrum

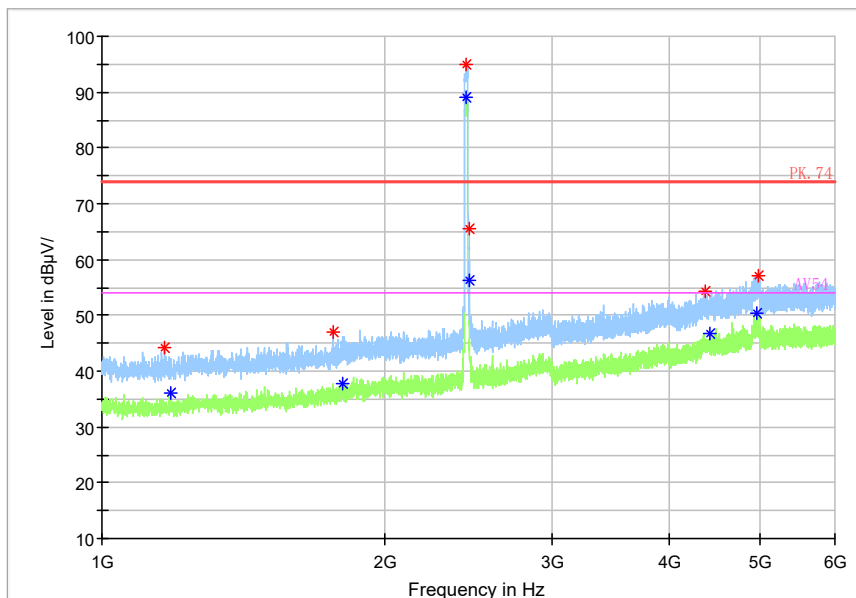


Frequency Range: 1GHz -6GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11b

Full Spectrum

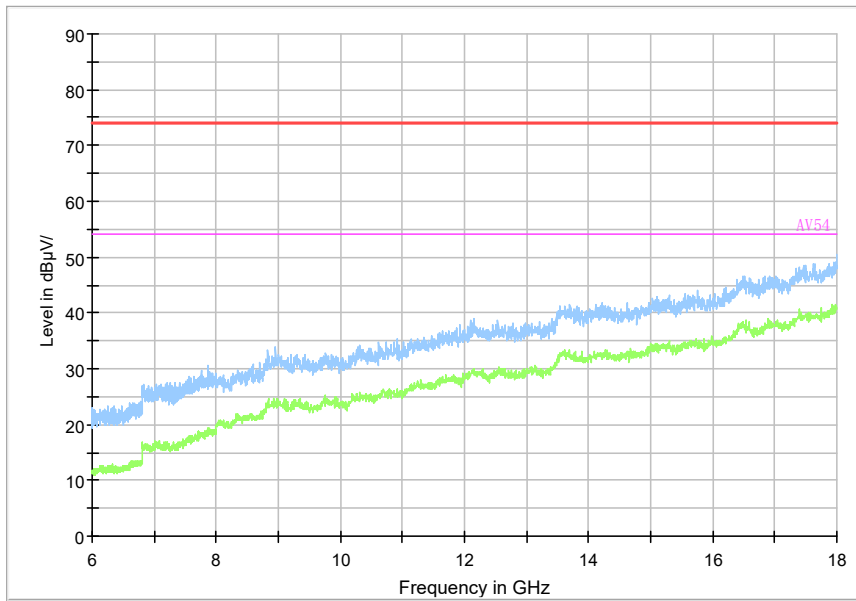


Frequency Range: 6GHz -18GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11b

Full Spectrum

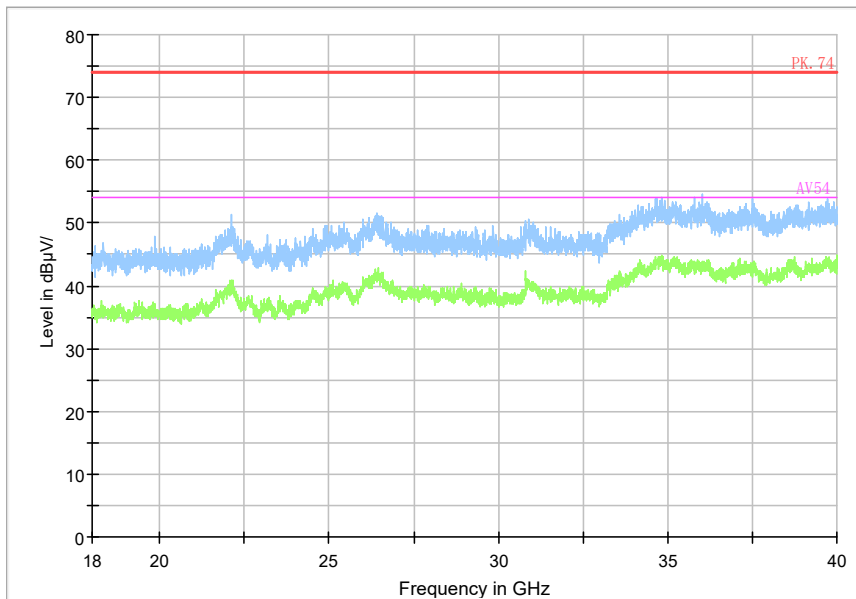


Frequency Range: 18GHz -40GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11b

Full Spectrum

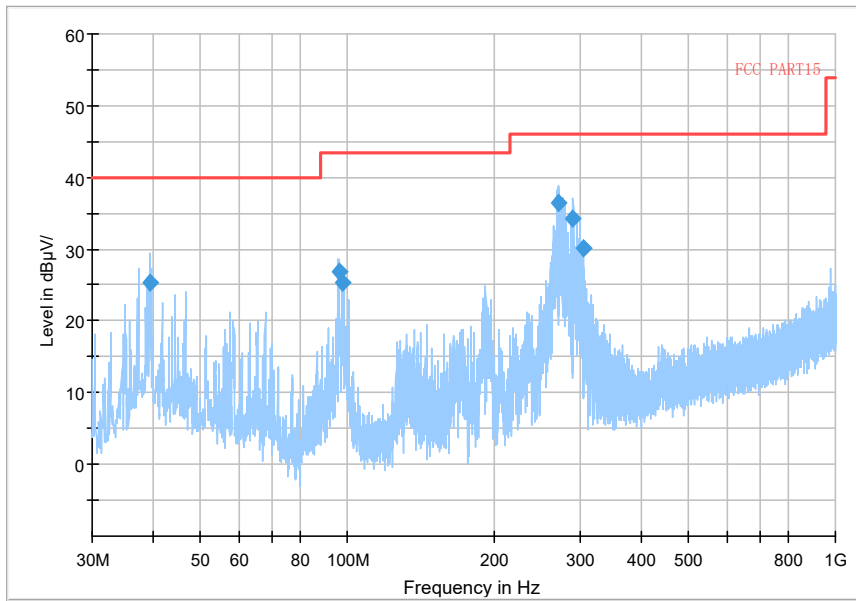


Frequency Range: 30MHz -1GHz  
 Detector: QP mode  
 Modulation type: 802.11g

Full Spectrum

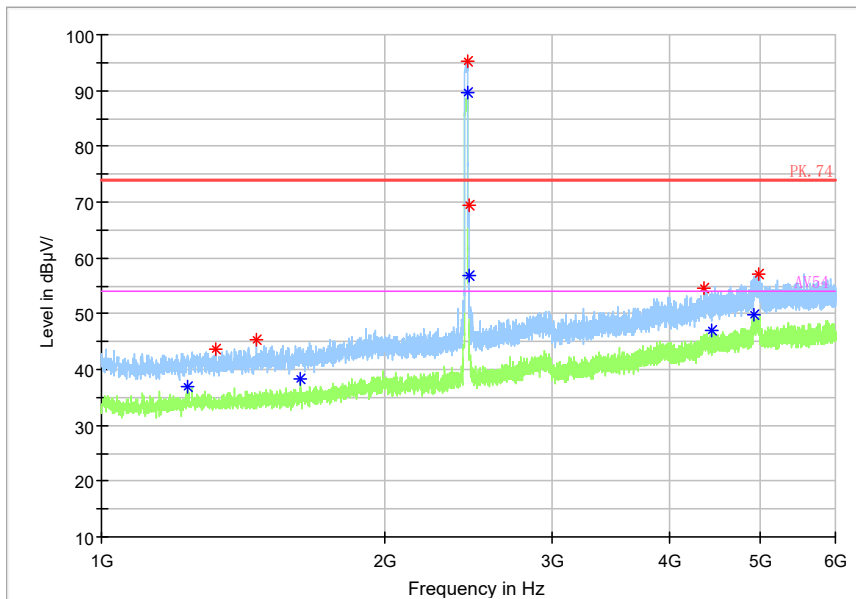

Frequency Range: 1GHz -6GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11g

Full Spectrum

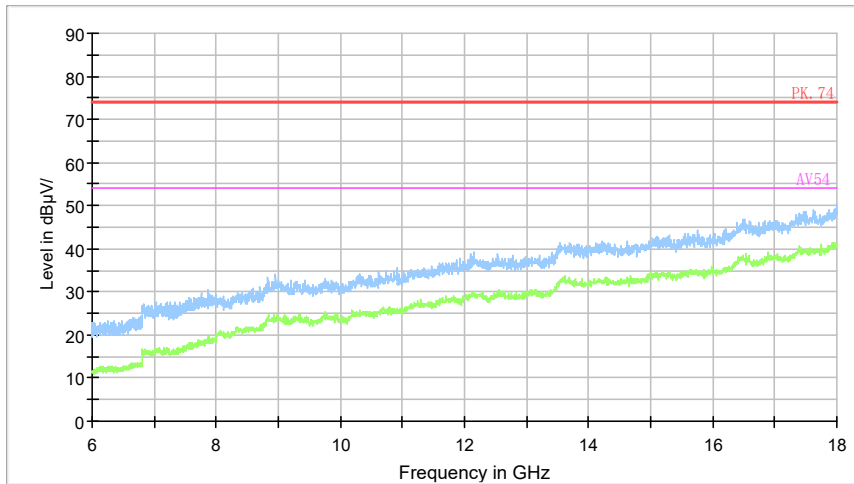


<span style="color: green;">—</span> Preview Result 2-AVG	<span style="color: blue;">—</span> Preview Result 1-PK+	<span style="color: blue;">*</span> Critical_Freqs AVG
<span style="color: red;">*</span> Critical_Freqs PK+	<span style="color: red;">—</span> PK.74	<span style="color: magenta;">—</span> AV54
<span style="color: blue;">◆</span> Final_Result PK+	<span style="color: green;">◆</span> Final_Result AVG	

Comment


Frequency Range: 6GHz -18GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11g

Full Spectrum

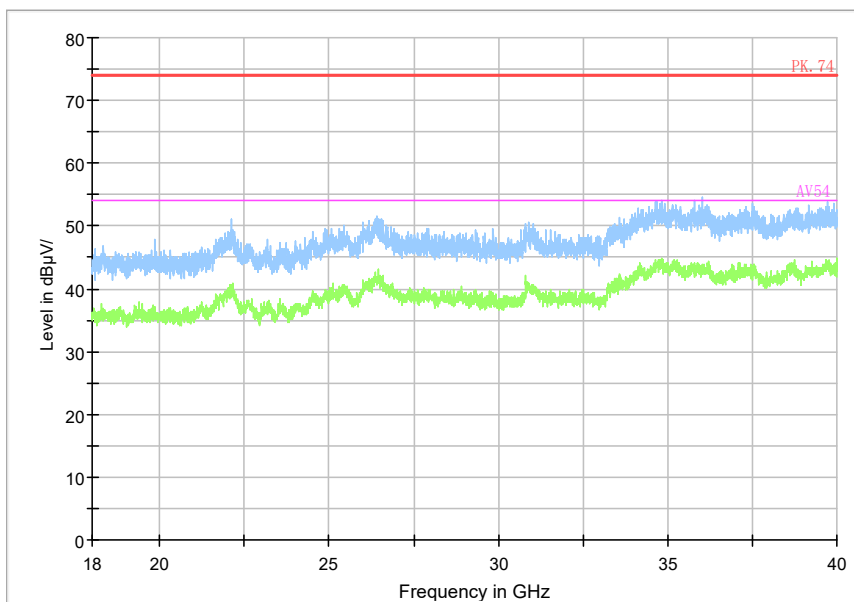


Frequency Range: 18GHz -40GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11g

Full Spectrum

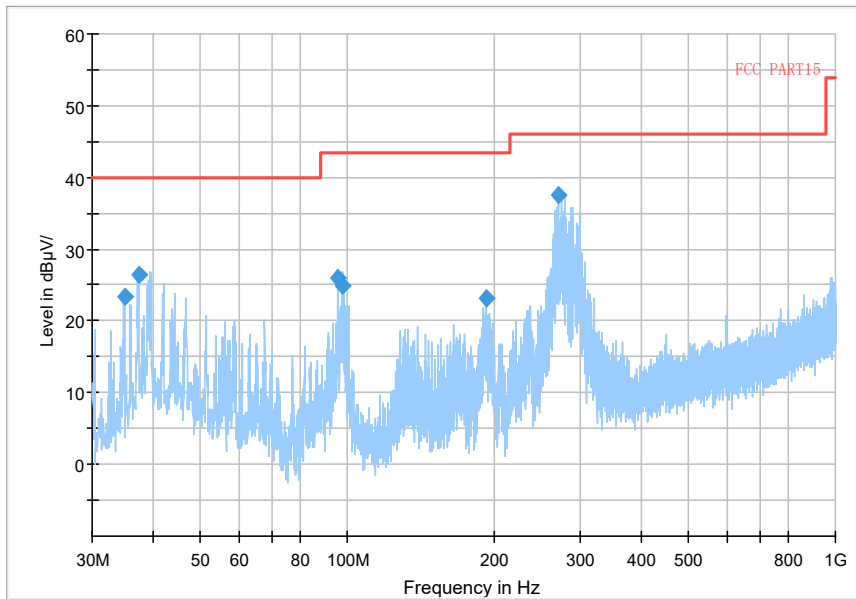


Frequency Range: 30MHz -1GHz  
Detector: QP mode  
Test Mode: 802.11n(HT20)

Full Spectrum

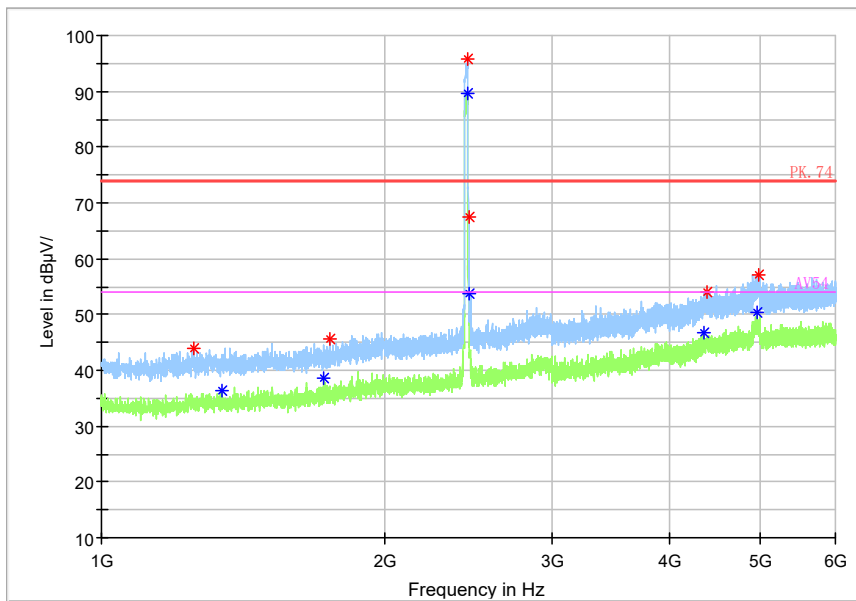

Frequency Range: 1GHz -6GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11n(HT20)

Full Spectrum

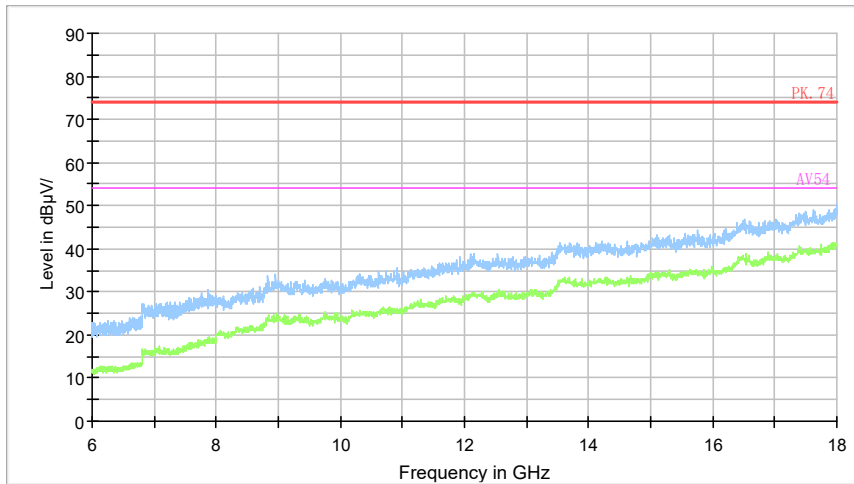


- Preview Result 2-AVG
- Preview Result 1-PK+
- \* Critical\_Freqs AVG
- \* Critical\_Freqs PK+
- PK.74
- AV54
- ◆ Final\_Result PK+
- ◆ Final\_Result AVG

Comment


Frequency Range: 6GHz -18GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11n(HT20)

Full Spectrum

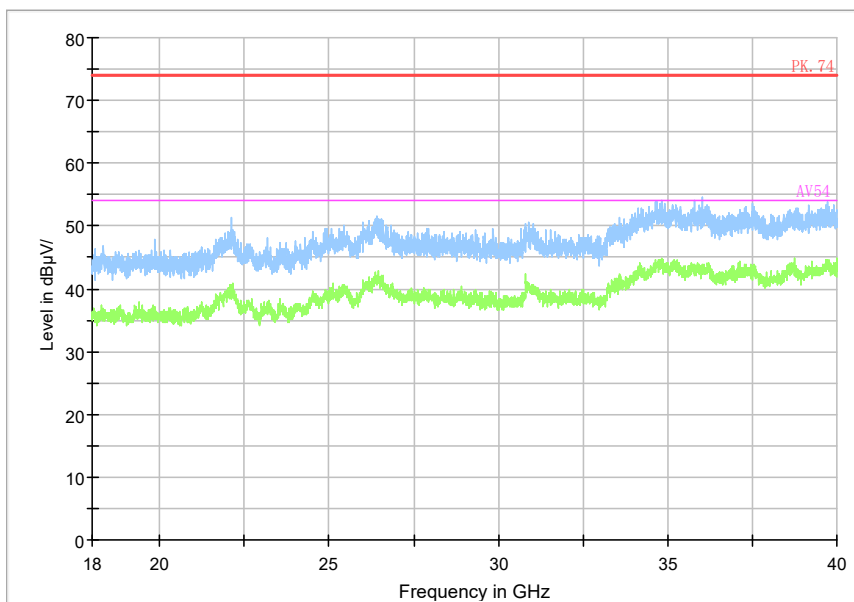


Frequency Range: 18GHz -40GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11n(HT20)

Carrier frequency (MHz): 2462  
Channel No.:11

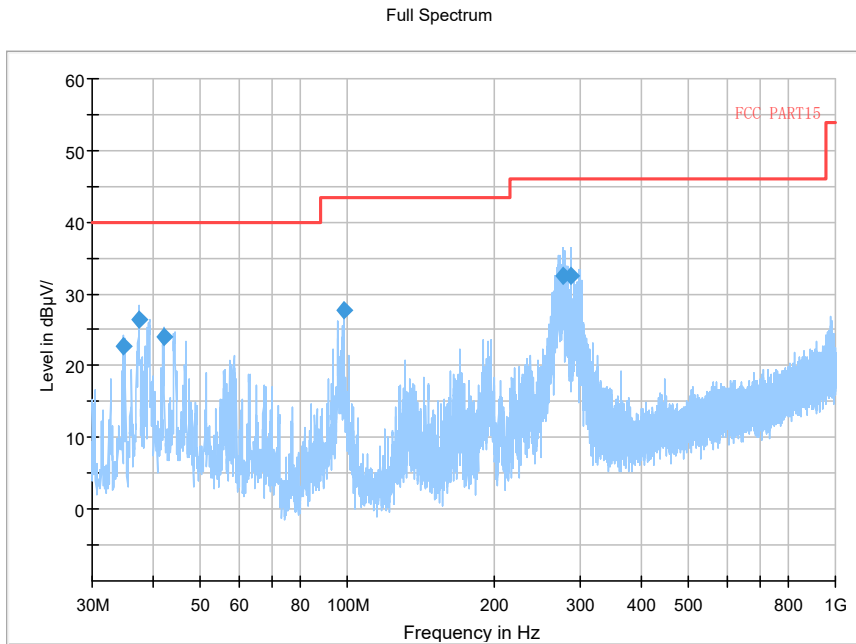


Frequency Range: 30MHz -1GHz  
Detector: QP mode  
Test Mode: 802.11b

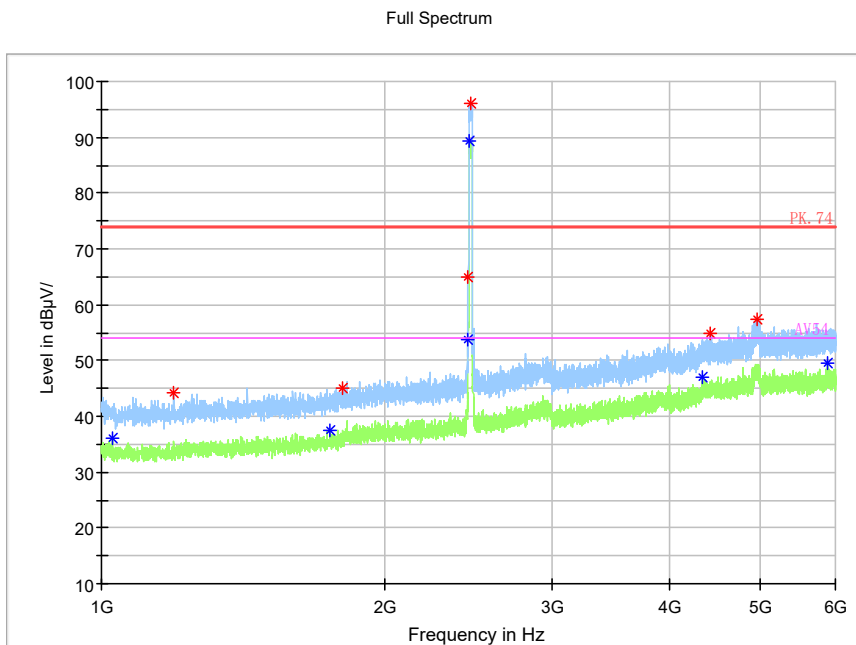

Frequency Range: 1GHz -6GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11b

Full Spectrum

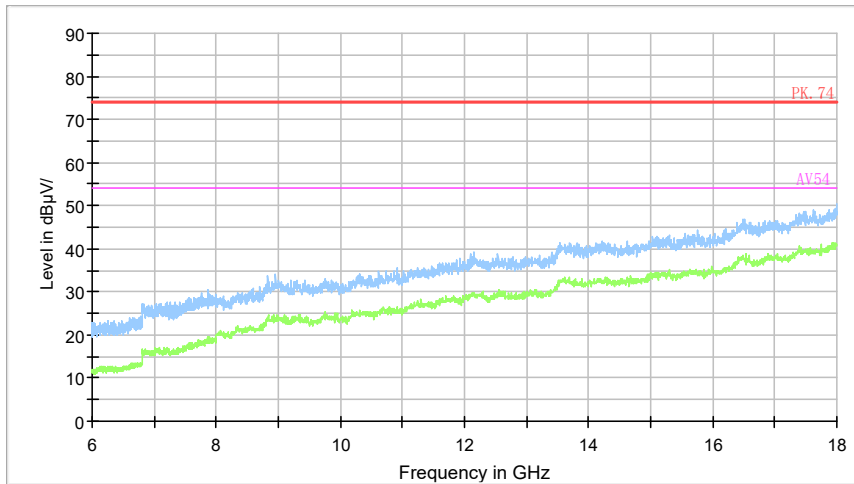


- Preview Result 2-AVG
- Preview Result 1-PK+
- Critical\_Freqs AVG
- \* Critical\_Freqs PK+
- PK.74
- \* AV54
- ◆ Final\_Result PK+
- ◆ Final\_Result AVG

Comment

Frequency Range: 6GHz -18GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11b


Full Spectrum

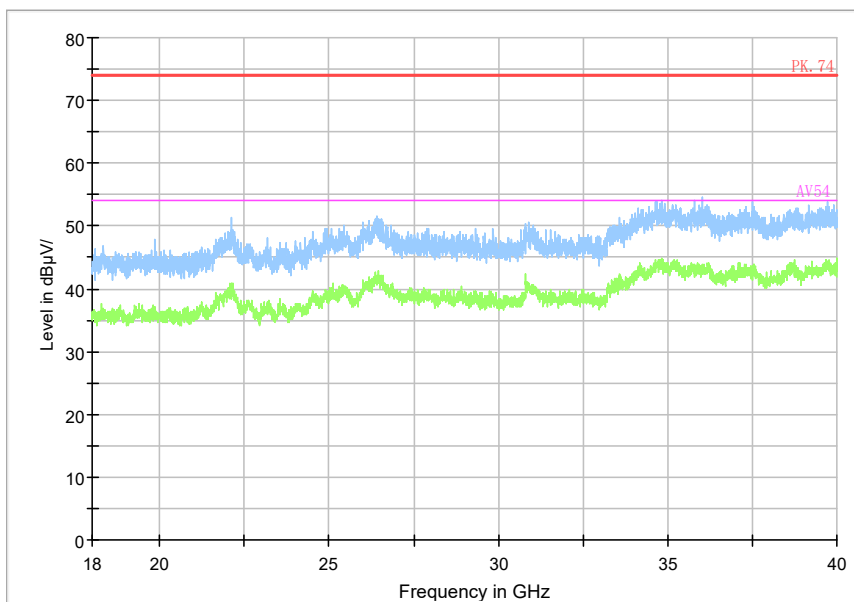

Frequency Range: 18GHz -40GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11b




Full Spectrum

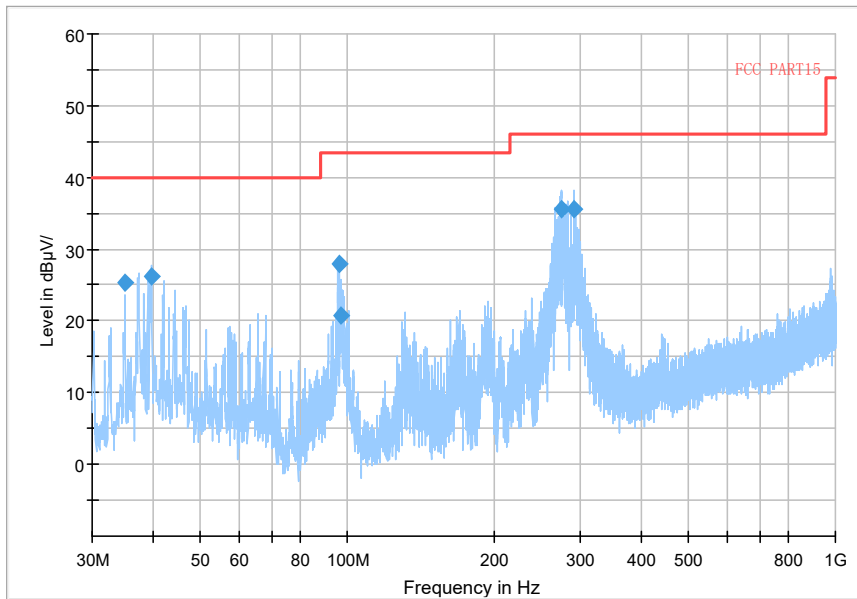


Frequency Range: 30MHz -1GHz  
 Detector: QP mode  
 Modulation type: 802.11g

Full Spectrum

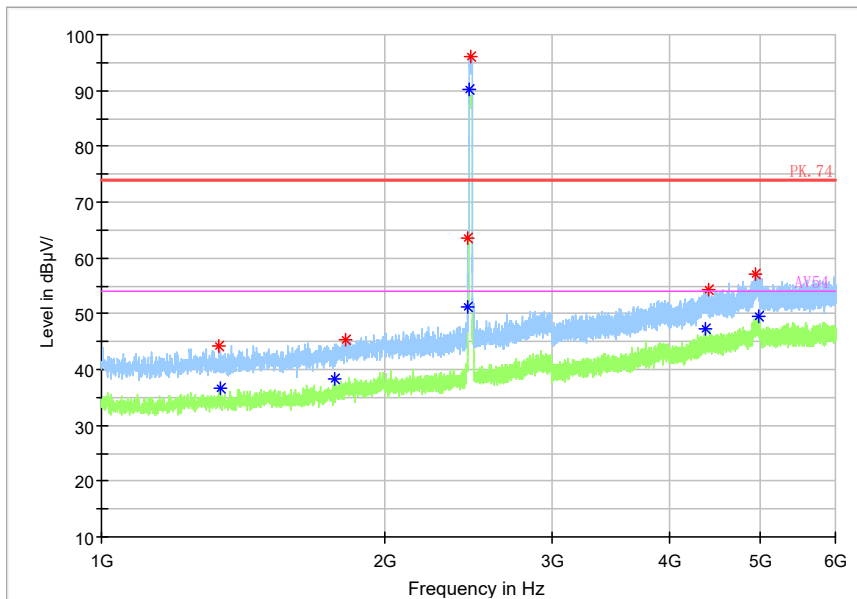

Frequency Range: 1GHz -6GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11g

Full Spectrum

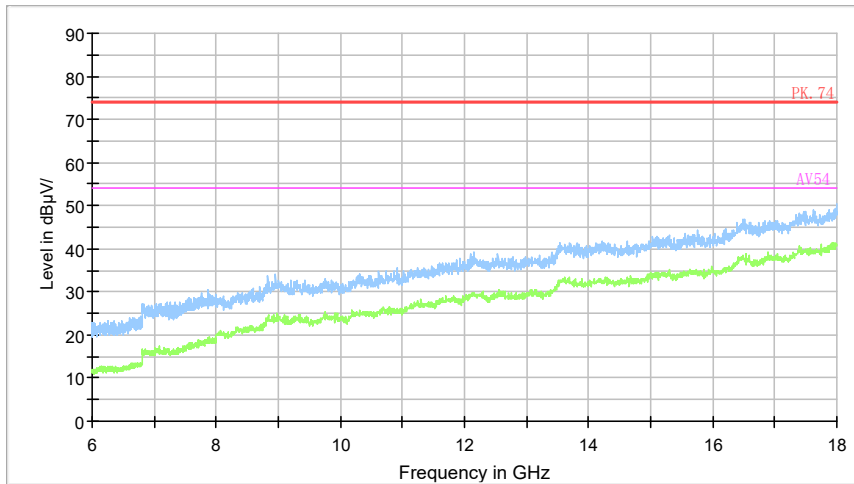


- Preview Result 2-AVG
- Preview Result 1-PK+
- \* Critical\_Freqs AVG
- \* Critical\_Freqs PK+
- PK.74
- AV54
- ◆ Final\_Result PK+
- ◆ Final\_Result AVG

Comment


Frequency Range: 6GHz -18GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11g

Full Spectrum

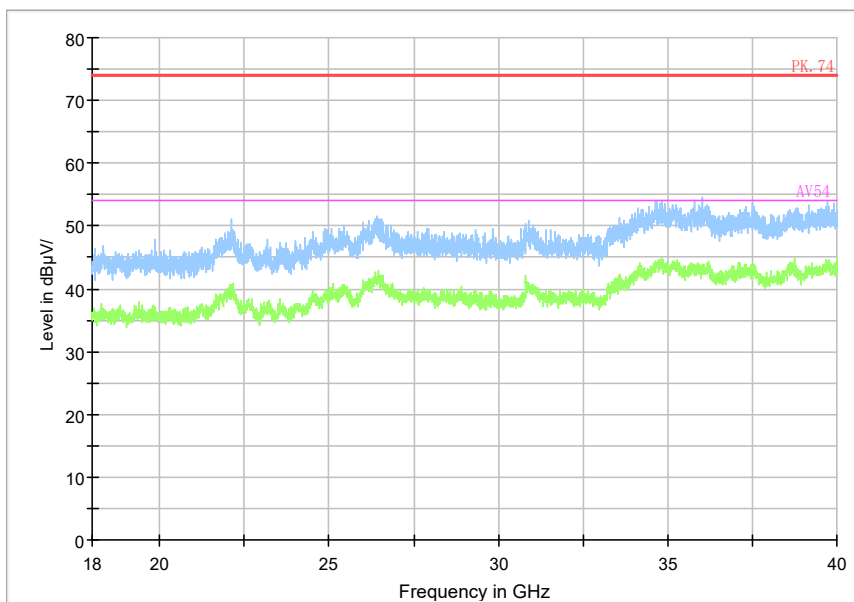


Frequency Range: 18GHz -40GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11g

Full Spectrum

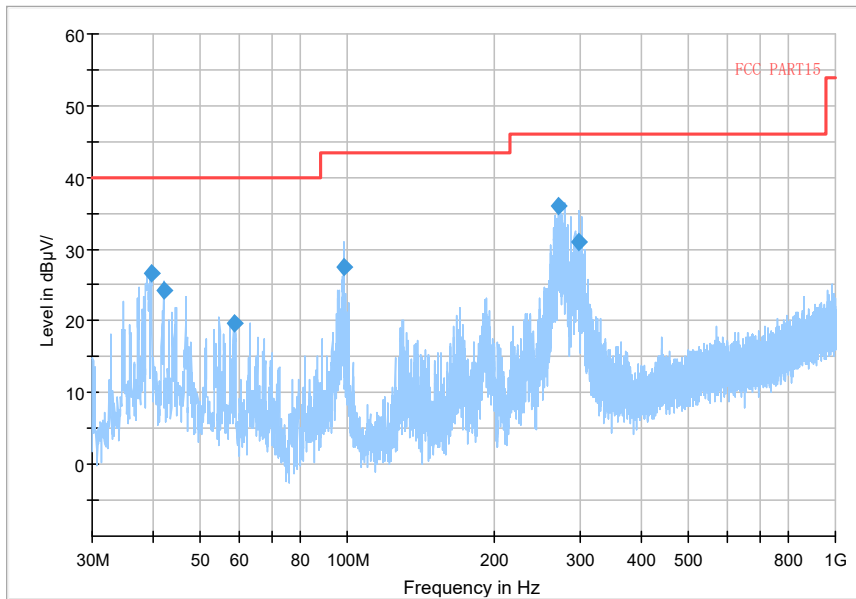


Frequency Range: 30MHz -1GHz  
 Detector: QP mode  
 Test Mode: 802.11n(HT20)

Full Spectrum

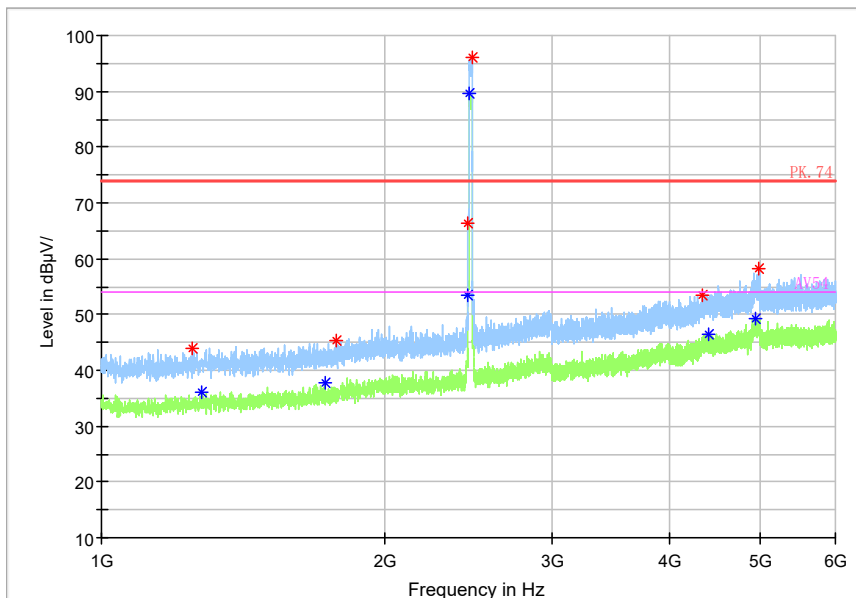

Frequency Range: 1GHz -6GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11n(HT20)

Full Spectrum

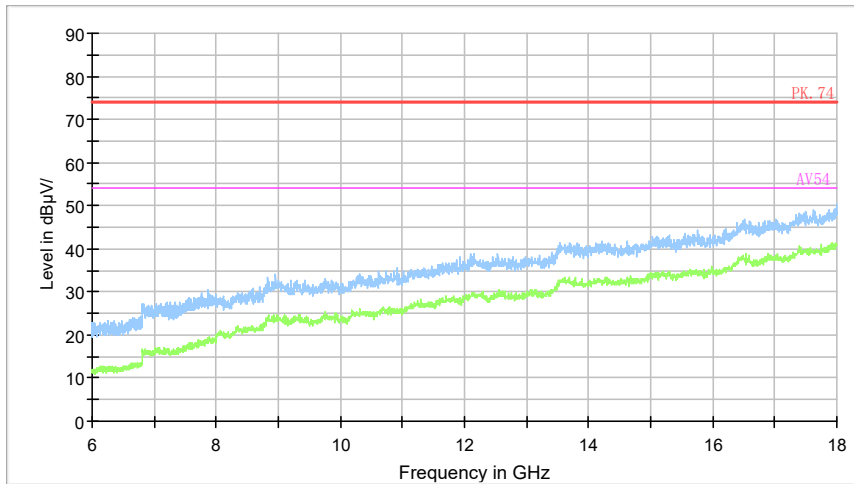


- Preview Result 2-AVG
- Preview Result 1-PK+
- PK.74
- Critical\_Freqs AVG AV54
- \* Critical\_Freqs PK+
- \* Final\_Result PK+
- ♦ Final\_Result AVG

Comment


Frequency Range: 6GHz -18GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11n(HT20)

Full Spectrum

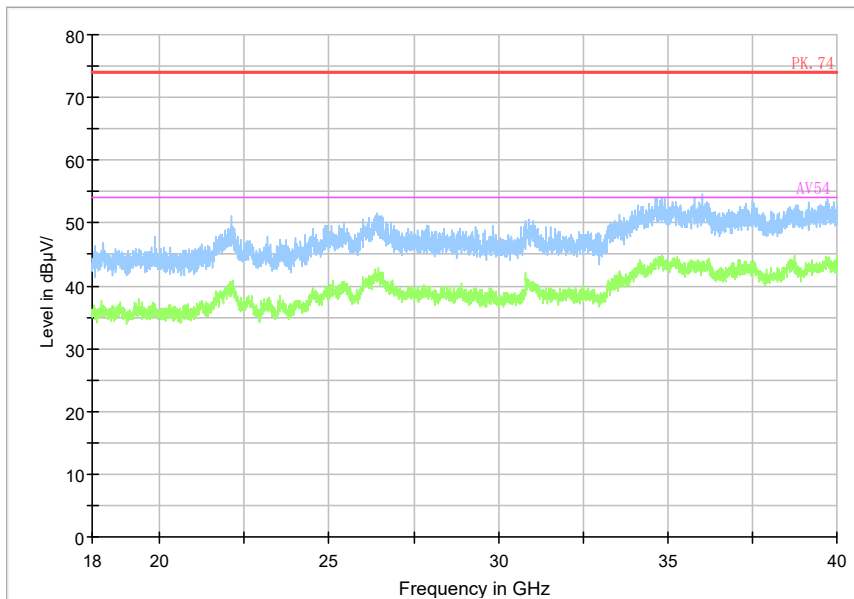


Frequency Range: 18GHz -40GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11n(HT20)

Full Spectrum

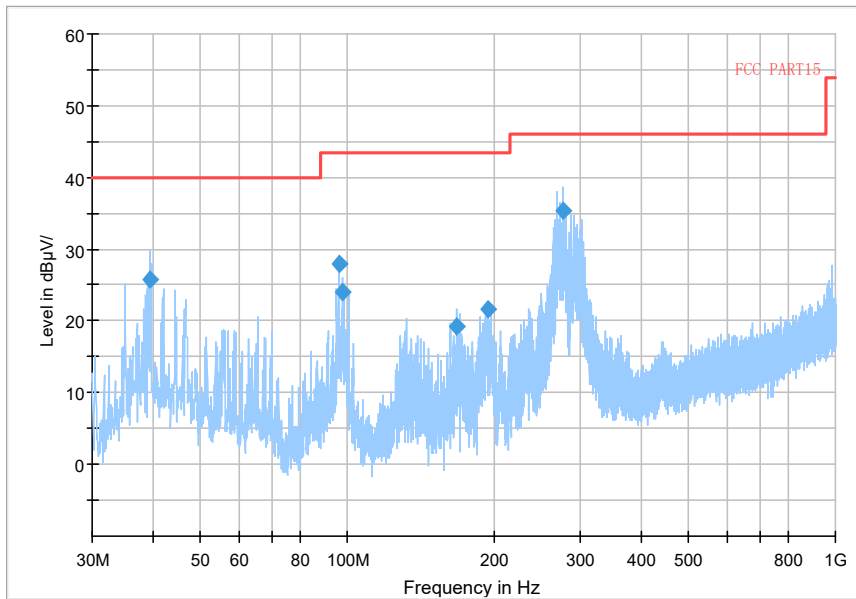


Frequency Range: 30MHz -1GHz  
 Detector: QP mode  
 Modulation type: 802.11n(HT40) channel 3

Full Spectrum

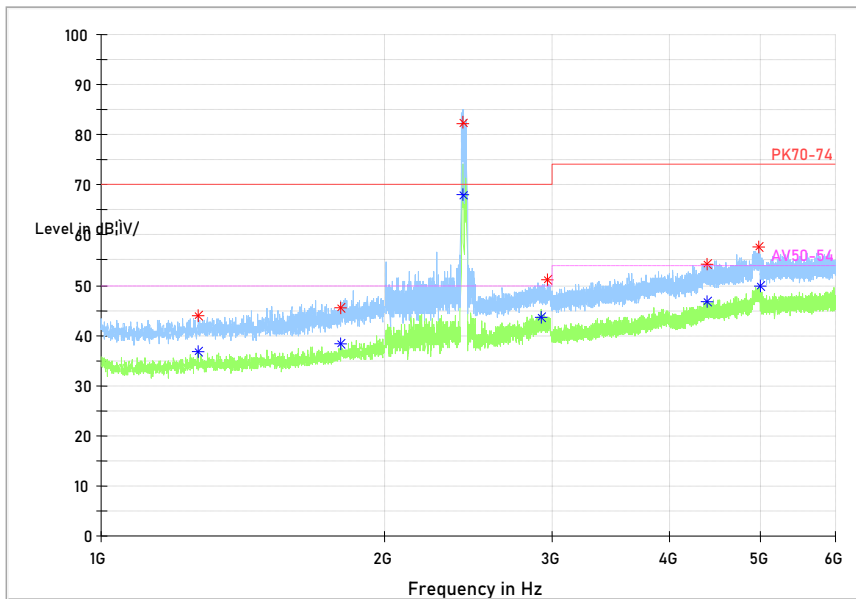

Frequency Range: 1GHz -6GHz  
 Detector: AV mode and PK mode  
 Modulation type: 802.11n(HT40) channel 3

Full Spectrum

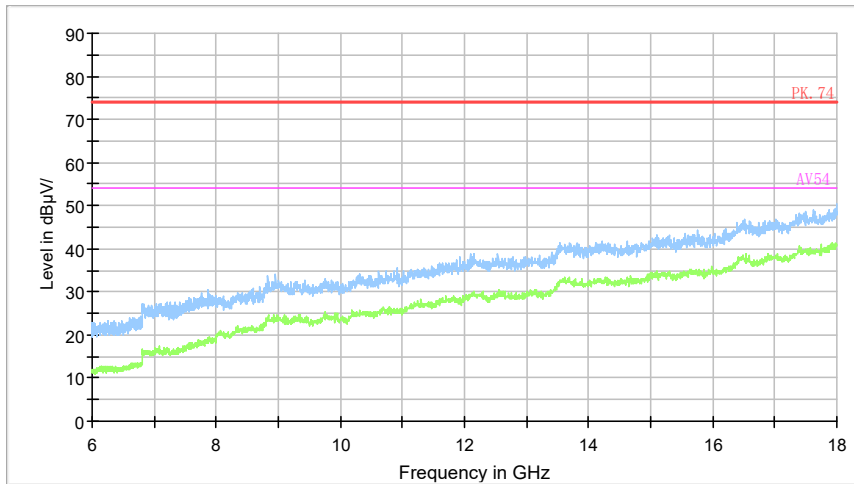


- Preview Result 2-AVG
- Preview Result 1-PK+
- \* Critical\_Freqs AVG
- \* Critical\_Freqs PK+
- PK.74
- AV54
- ◆ Final\_Result PK+
- ◆ Final\_Result AVG

Comment


Frequency Range: 6GHz -18GHz  
Detector: AV mode and PK mode  
Modulation type: 802.11n(HT40) channel 3

Full Spectrum

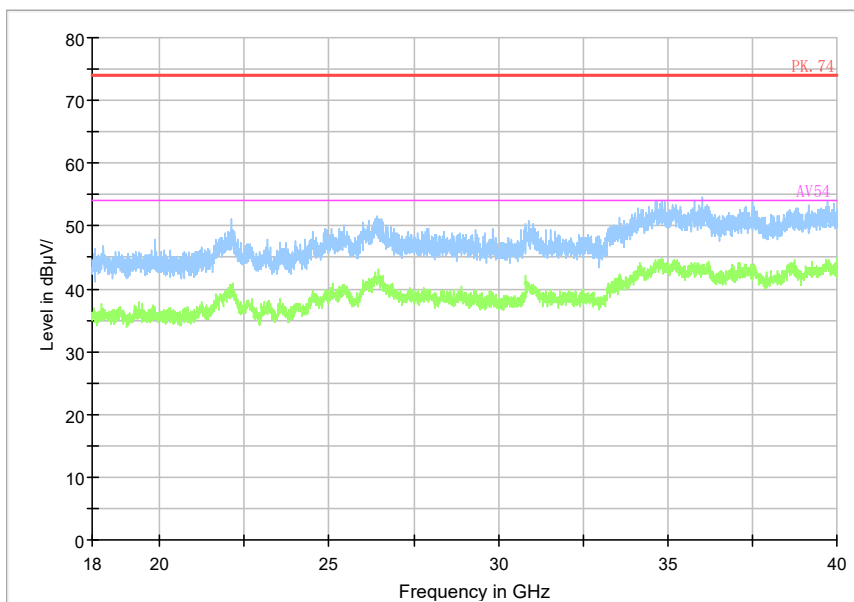


Frequency Range: 18GHz -40GHz  
Detector: AV mode and PK mode  
Modulation type: 802.11n(HT40) channel 3

Full Spectrum

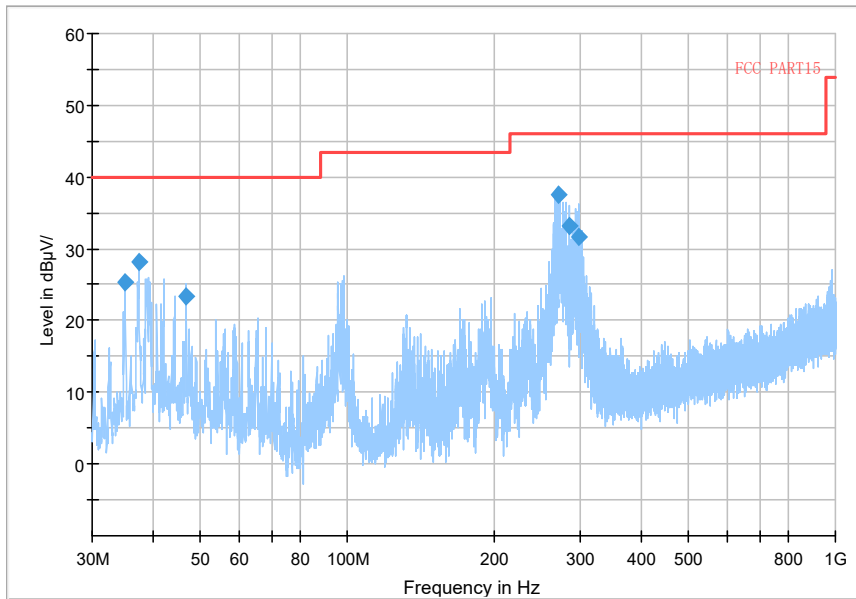


Frequency Range: 30MHz -1GHz  
Detector: QP mode  
Modulation type: 802.11n(HT40) channel 6

Full Spectrum

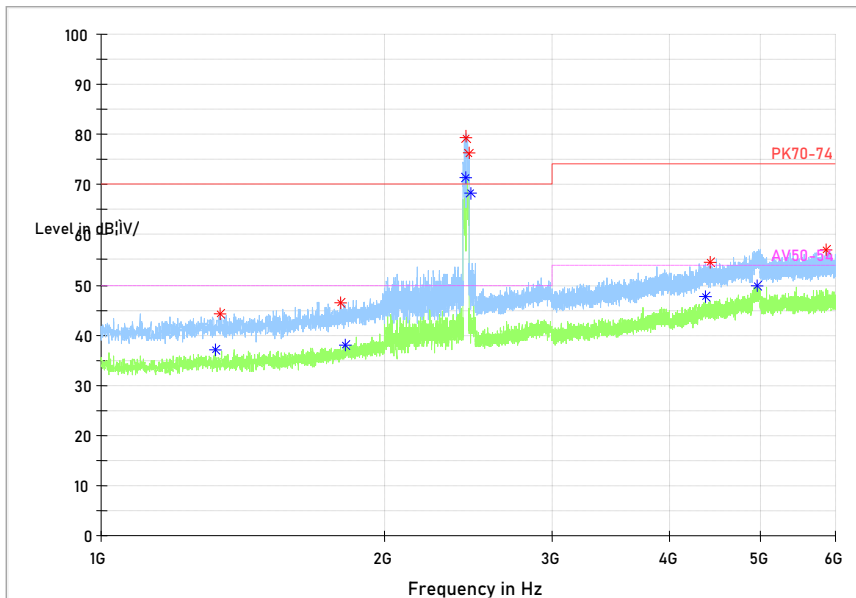

Frequency Range: 1GHz -6GHz  
Detector: AV mode and PK mode  
Modulation type: 802.11n(HT40) channel 6

Full Spectrum

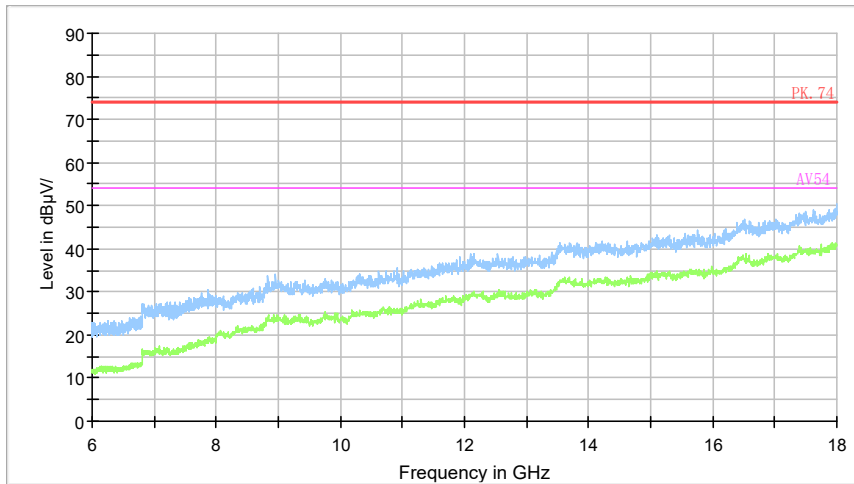


- Preview Result 2-AVG
- Preview Result 1-PK+
- PK.74
- Critical\_Freqs AVG AV54
- \* Critical\_Freqs PK+
- \* Final\_Result PK+
- ◆ Final\_Result AVG

Comment

Frequency Range: 6GHz -18GHz  
Detector: AV mode and PK mode  
Modulation type: 802.11n(HT40) channel 6


Full Spectrum

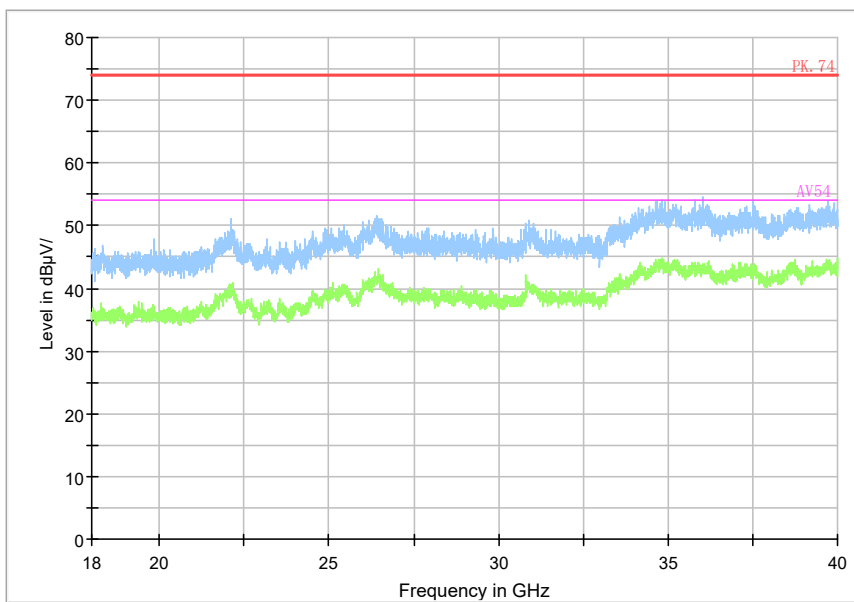

Frequency Range: 18GHz -40GHz  
Detector: AV mode and PK mode  
Modulation type: 802.11n(HT40) channel 6




Full Spectrum

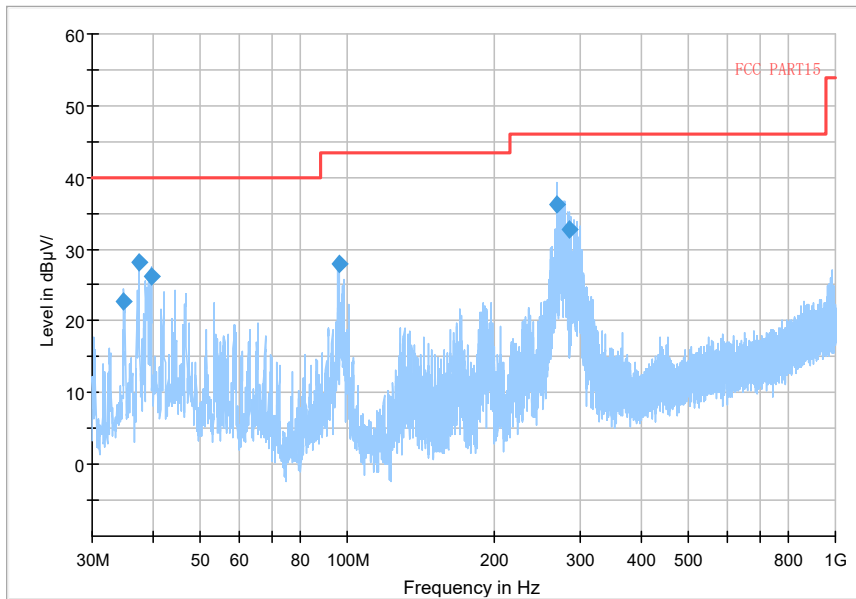


Frequency Range: 30MHz -1GHz  
Detector: QP mode  
Modulation type: 802.11n(HT40) channel 9

Full Spectrum

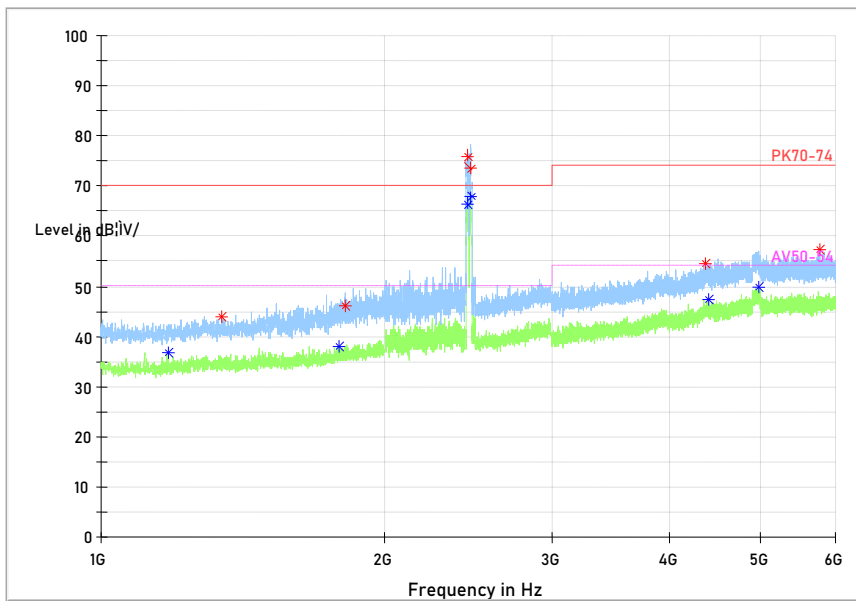

Frequency Range: 1GHz -6GHz  
Detector: AV mode and PK mode  
Modulation type: 802.11n(HT40) channel 9

Full Spectrum

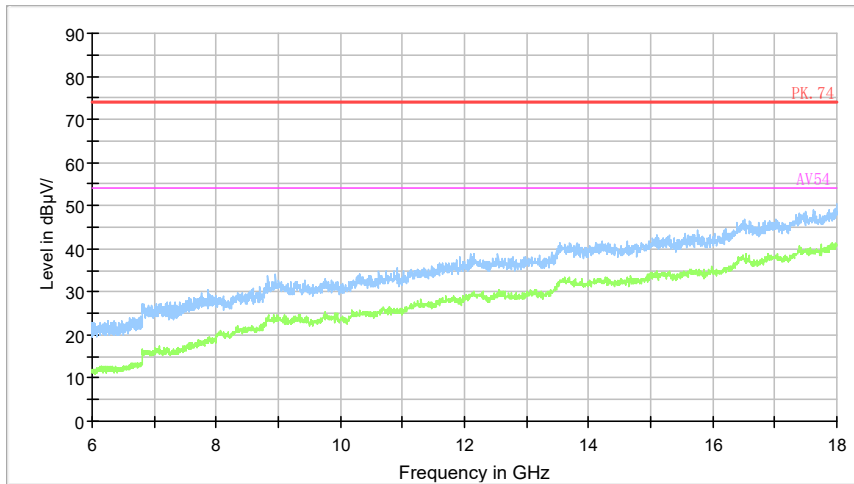


- Preview Result 2-AVG      — Preview Result 1-PK+      \* Critical\_Freqs AVG
- \* Critical\_Freqs PK+      — PK.74      — AV54
- ◆ Final\_Result PK+      ◆ Final\_Result AVG

Comment

Frequency Range: 6GHz -18GHz  
Detector: AV mode and PK mode  
Modulation type: 802.11n(HT40) channel 9

Full Spectrum

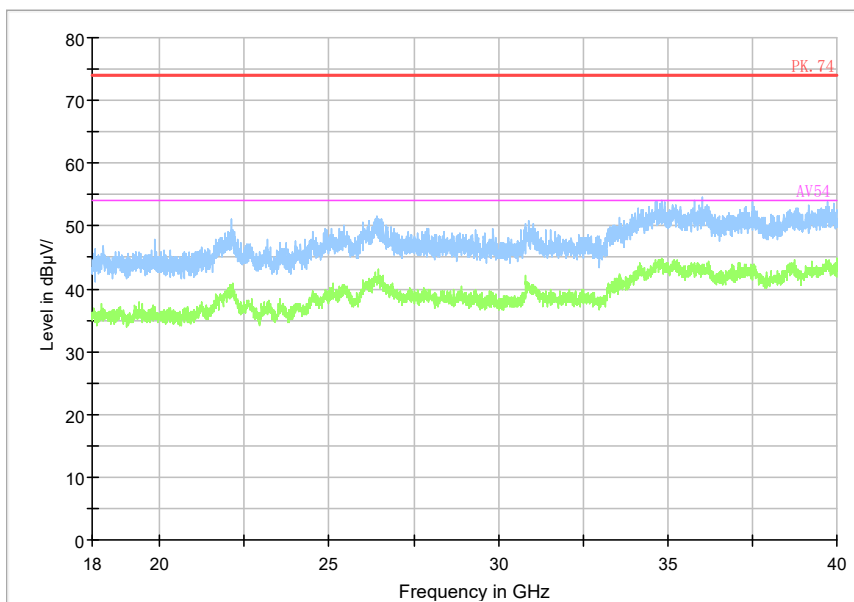

Frequency Range: 18GHz -40GHz  
Detector: AV mode and PK mode  
Modulation type: 802.11n(HT40) channel 9

### AC Power line Conducted Emission (EUT on 11b+charge)


A “reference path loss” Corr.(dB) is established and the  $L_{cable+ATT+VDF}$  is the attenuation of “reference path loss”, and including the cable loss, the attenuation of the attenuator, the voltage division factor of AMN.

The measurement results are obtained as described below:

$$P_{result} = P_{mea} + Corr.(dB)$$

Sample calculation:  $(38.35 \text{ dB}\mu\text{V}) = (7.95 \text{ dB}\mu\text{V}) + (30.4 \text{ dB})$ , the corresponding frequency is 0.349995MHz.

Full Spectrum

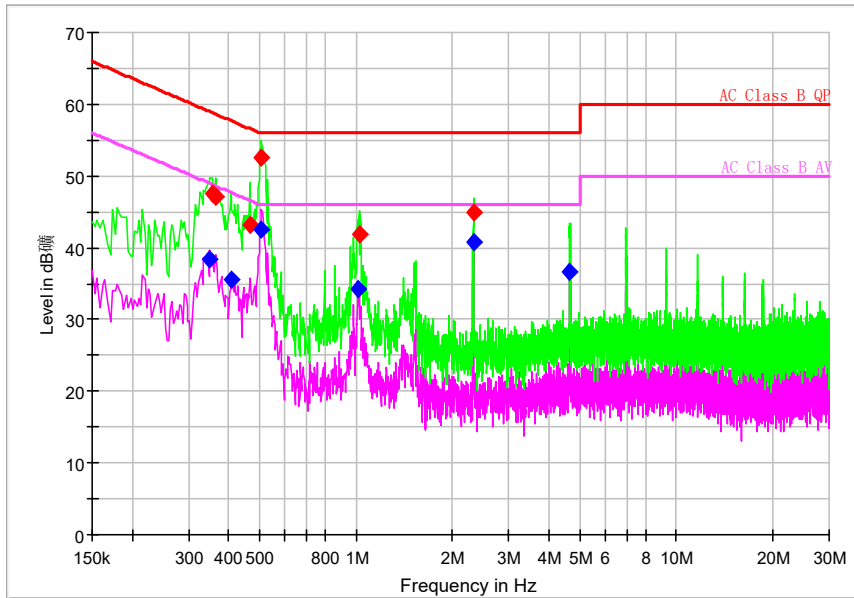

L+N Line

#### MEASUREMENT RESULT:

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)	Pmea QuasiPeak (dBμV)	Pmea Average (dBμV)
0.349995	---	38.35	48.96	10.61	L1	30.4	---	7.95
0.355965	47.48	---	58.82	11.34	L1	30.4	17.08	---
0.364920	47.20	---	58.62	11.42	L1	30.4	16.8	---
0.409695	---	35.58	47.65	12.08	L1	30.4	---	5.18
0.466410	43.14	---	56.58	13.44	L1	30.4	12.74	---
0.508200	---	42.49	46.00	3.51	N	30.4	---	12.09
0.508200	52.53	---	56.00	3.47	N	30.4	22.13	---
1.015650	---	34.14	46.00	11.86	L1	30.4	---	3.74
1.021620	41.80	---	56.00	14.20	N	30.4	11.4	---
2.329050	---	40.86	46.00	5.14	N	30.4	---	10.46
2.329050	44.97	---	56.00	11.03	N	30.4	14.57	---
4.657350	---	36.67	46.00	9.33	L1	30.5	---	6.17

---End of Test Report---