




Mode:802.11ax HE40 Tone:242T Frequency:5270MHz  
Ant:Chain0

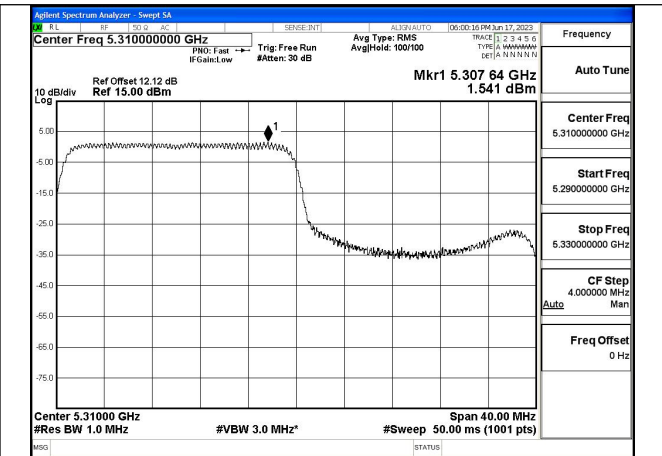


Mode:802.11ax HE40 Tone:242T Frequency:5310MHz  
Ant:Chain0

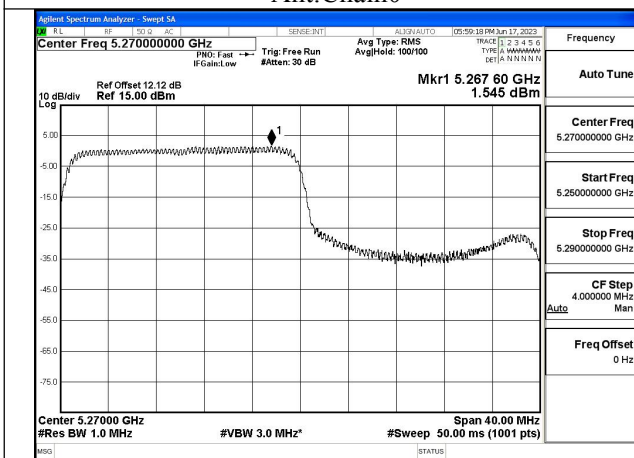


Mode:802.11ax HE40 Tone:242T Frequency:5270MHz  
Ant:Chain1

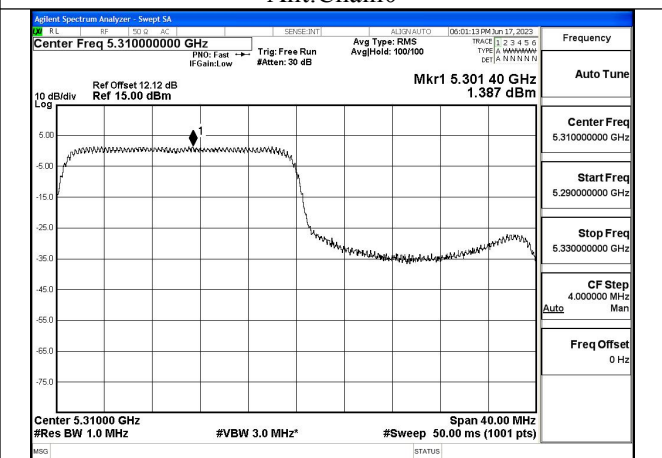



Mode:802.11ax HE40 Tone:242T Frequency:5310MHz  
Ant:Chain1

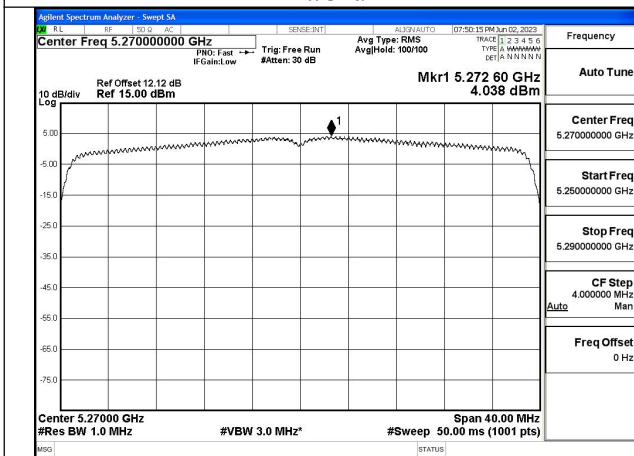

Mode:802.11ax HE40 Tone:484T Frequency:5270MHz  
Ant:Chain0

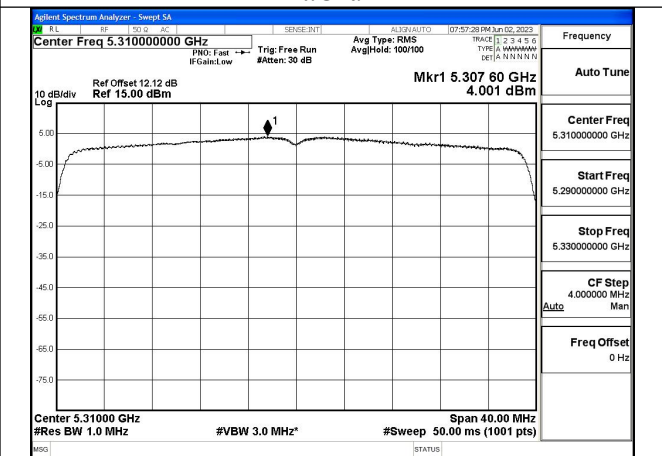


Mode:802.11ax HE40 Tone:484T Frequency:5310MHz  
Ant:Chain0

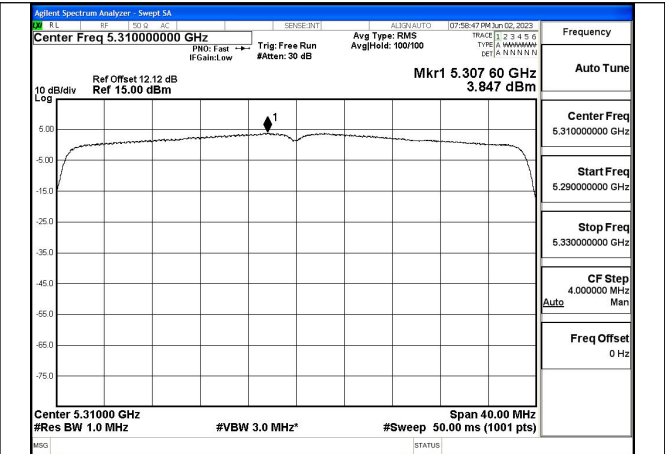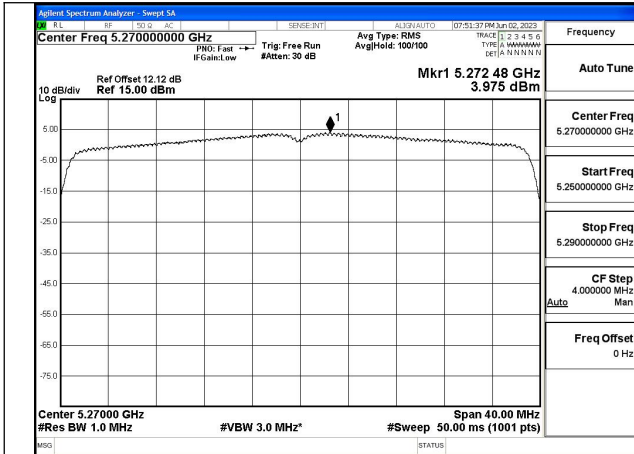


Mode:802.11ax HE40 Tone:484T Frequency:5270MHz  
Ant:Chain1

Mode:802.11ax HE40 Tone:484T Frequency:5310MHz  
Ant:Chain1

Test Mode: 802.11ac VHT80


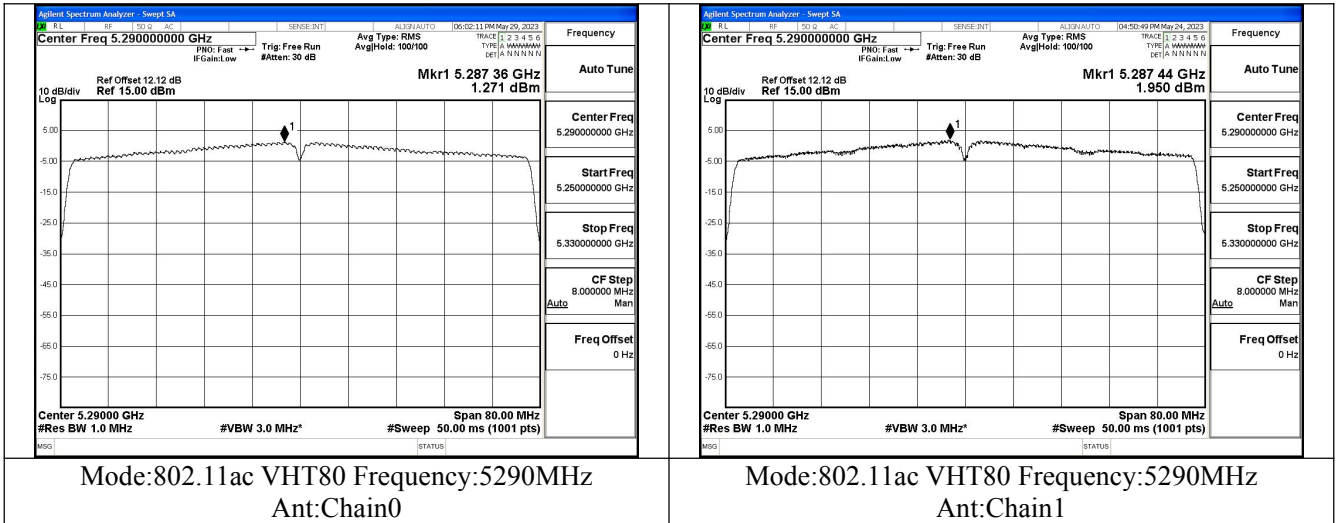


Test Mode: 802.11ax HE80

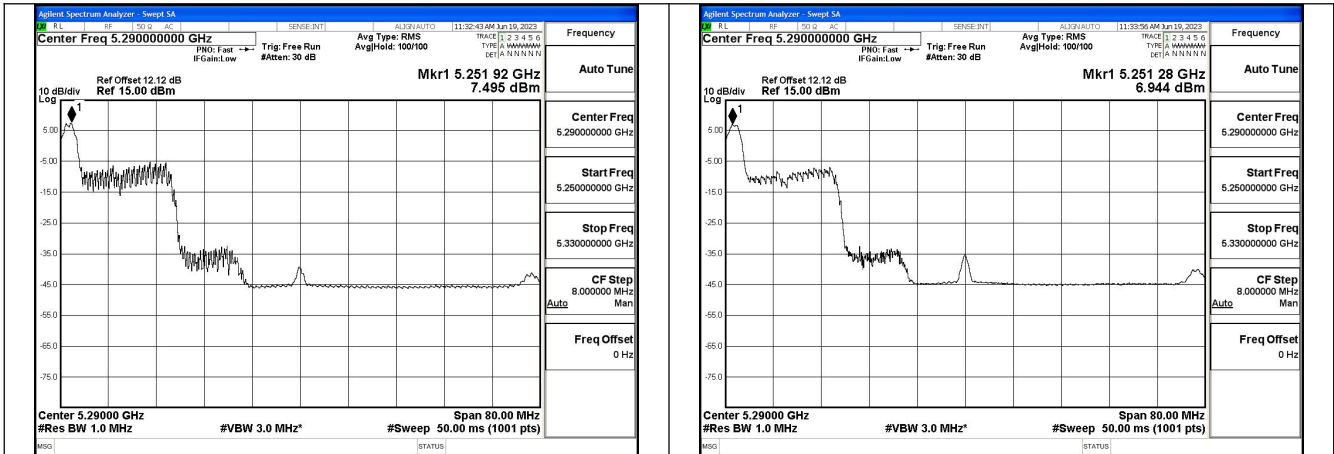



Mode:802.11ax HE80 Tone:26T Frequency:5290MHz  
Ant:Chain0

Mode:802.11ax HE80 Tone:26T Frequency:5290MHz  
Ant:Chain1

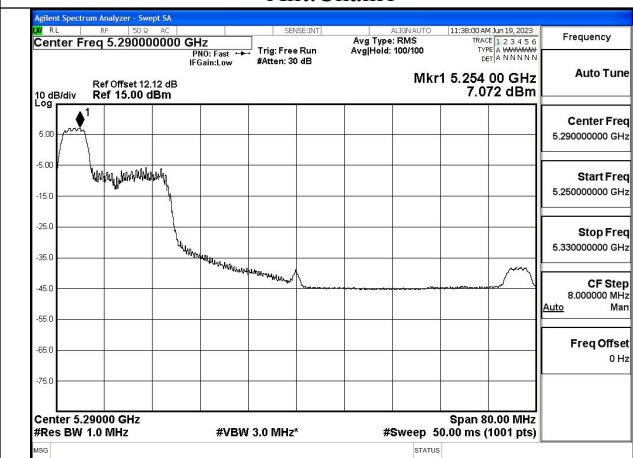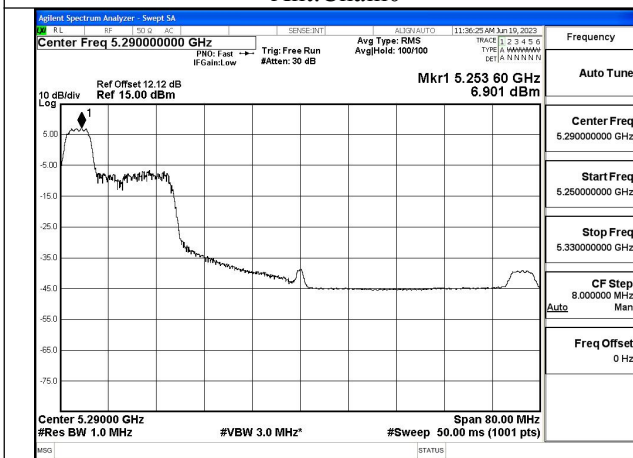


Mode:802.11ax HE80 Tone:52T Frequency:5290MHz  
Ant:Chain0

Mode:802.11ax HE80 Tone:52T Frequency:5290MHz  
Ant:Chain1

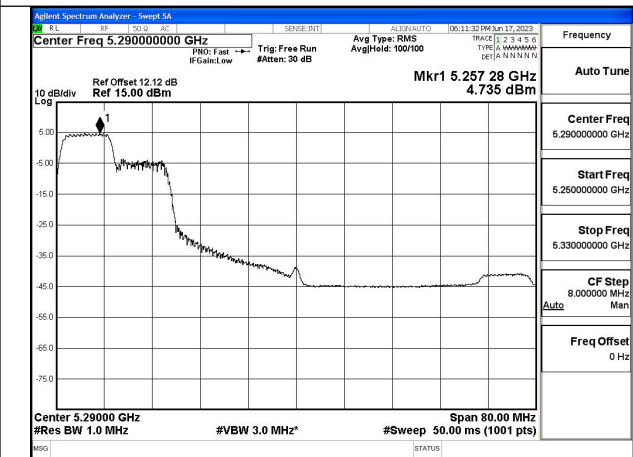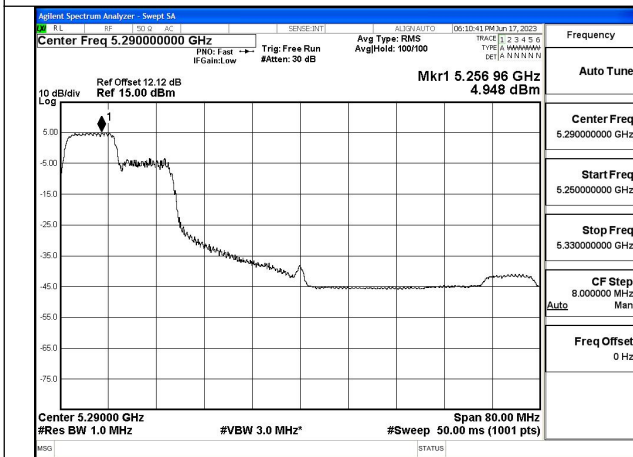


Mode:802.11ax HE80 Tone:106T Frequency:5290MHz  
Ant:Chain0


Mode:802.11ax HE80 Tone:106T Frequency:5290MHz  
Ant:Chain1

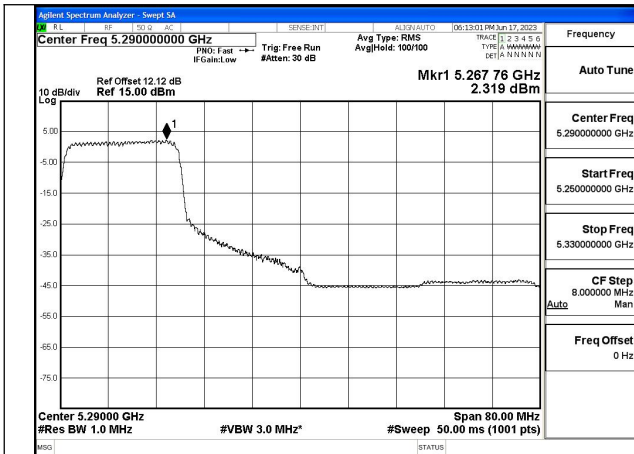


Mode:802.11ax HE80 Tone:242T Frequency:5290MHz  
Ant:Chain0

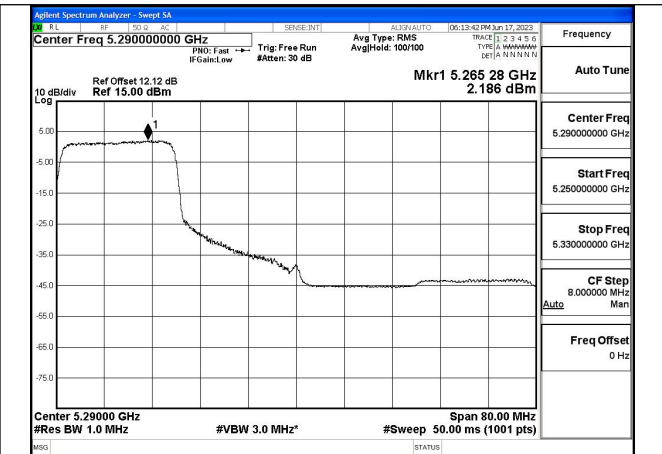


Mode:802.11ax HE80 Tone:242T Frequency:5290MHz  
Ant:Chain1

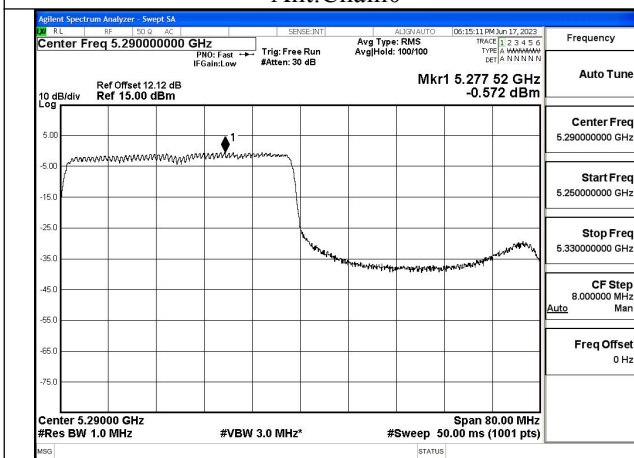


Mode:802.11ax HE80 Tone:484T Frequency:5290MHz  
Ant:Chain0

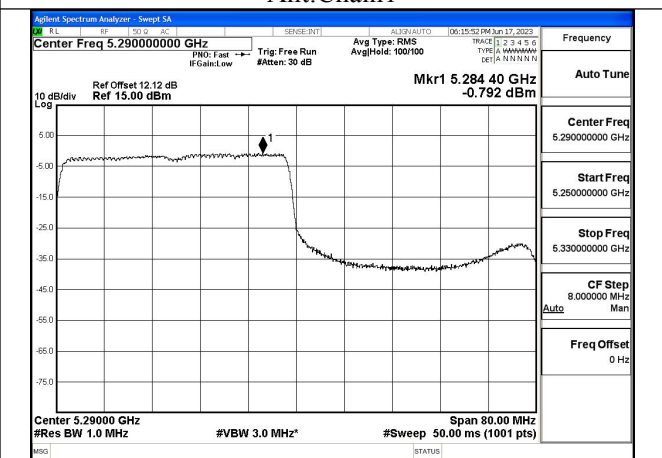

Mode:802.11ax HE80 Tone:484T Frequency:5290MHz  
Ant:Chain1

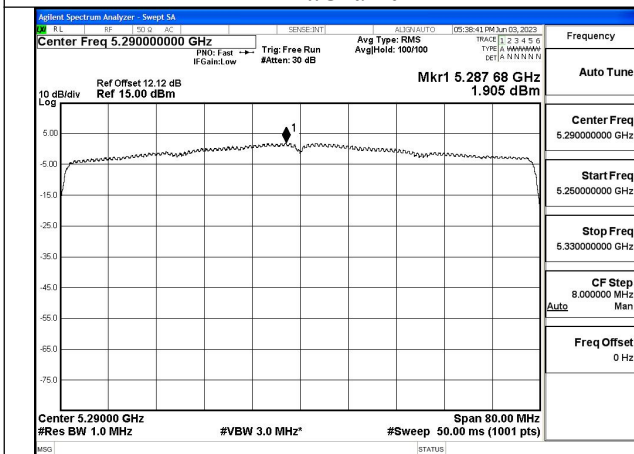

Mode:802.11ax HE80 Tone:996T Frequency:5290MHz  
Ant:Chain0

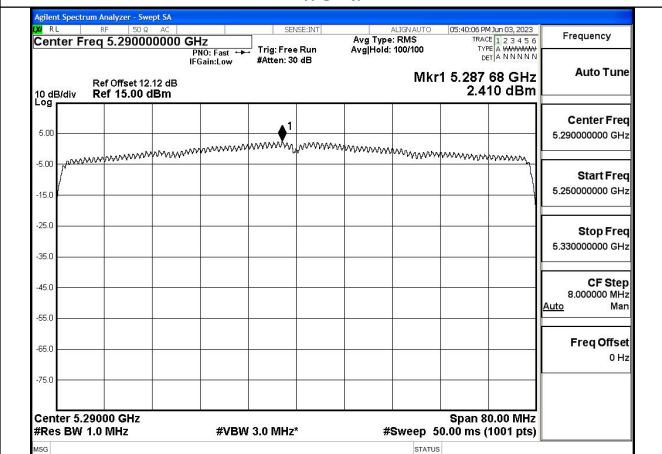

Mode:802.11ax HE80 Tone:996T Frequency:5290MHz  
Ant:Chain1

### Dynamic Frequency Selection DESCRIPTION OF Master Device


The Master Device is a SKSpruce Technologies Co., Ltd., Indoor Access Point, FCC ID: 2AHKT-WIA3300-20. The rated output power of the Master unit is > 23dBm (EIRP). Therefore the required interference threshold level is  $-64+4.07(\text{ant gain}) = -59.93 \text{ dBm}$

### Radar Waveform Calibration Result




**<20MHz / 5300 MHz> Radar Type 0**

**Radar / DFS detection threshold level and the burst of pulses on the Channel frequency**

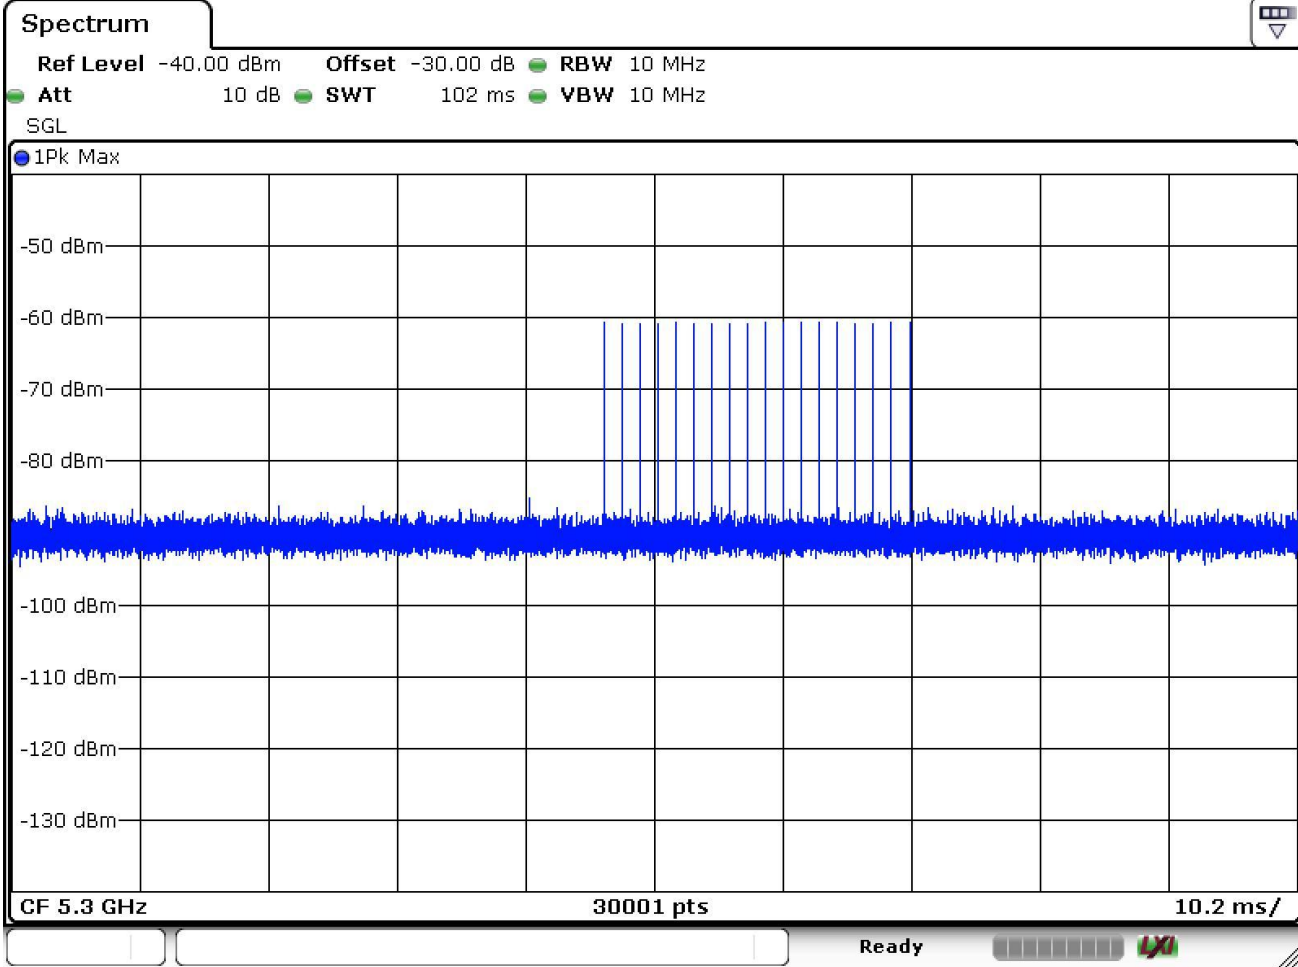

Date: 5. JUN. 2023 15:22:17

**Data Traffic and Noise Floor Plots**

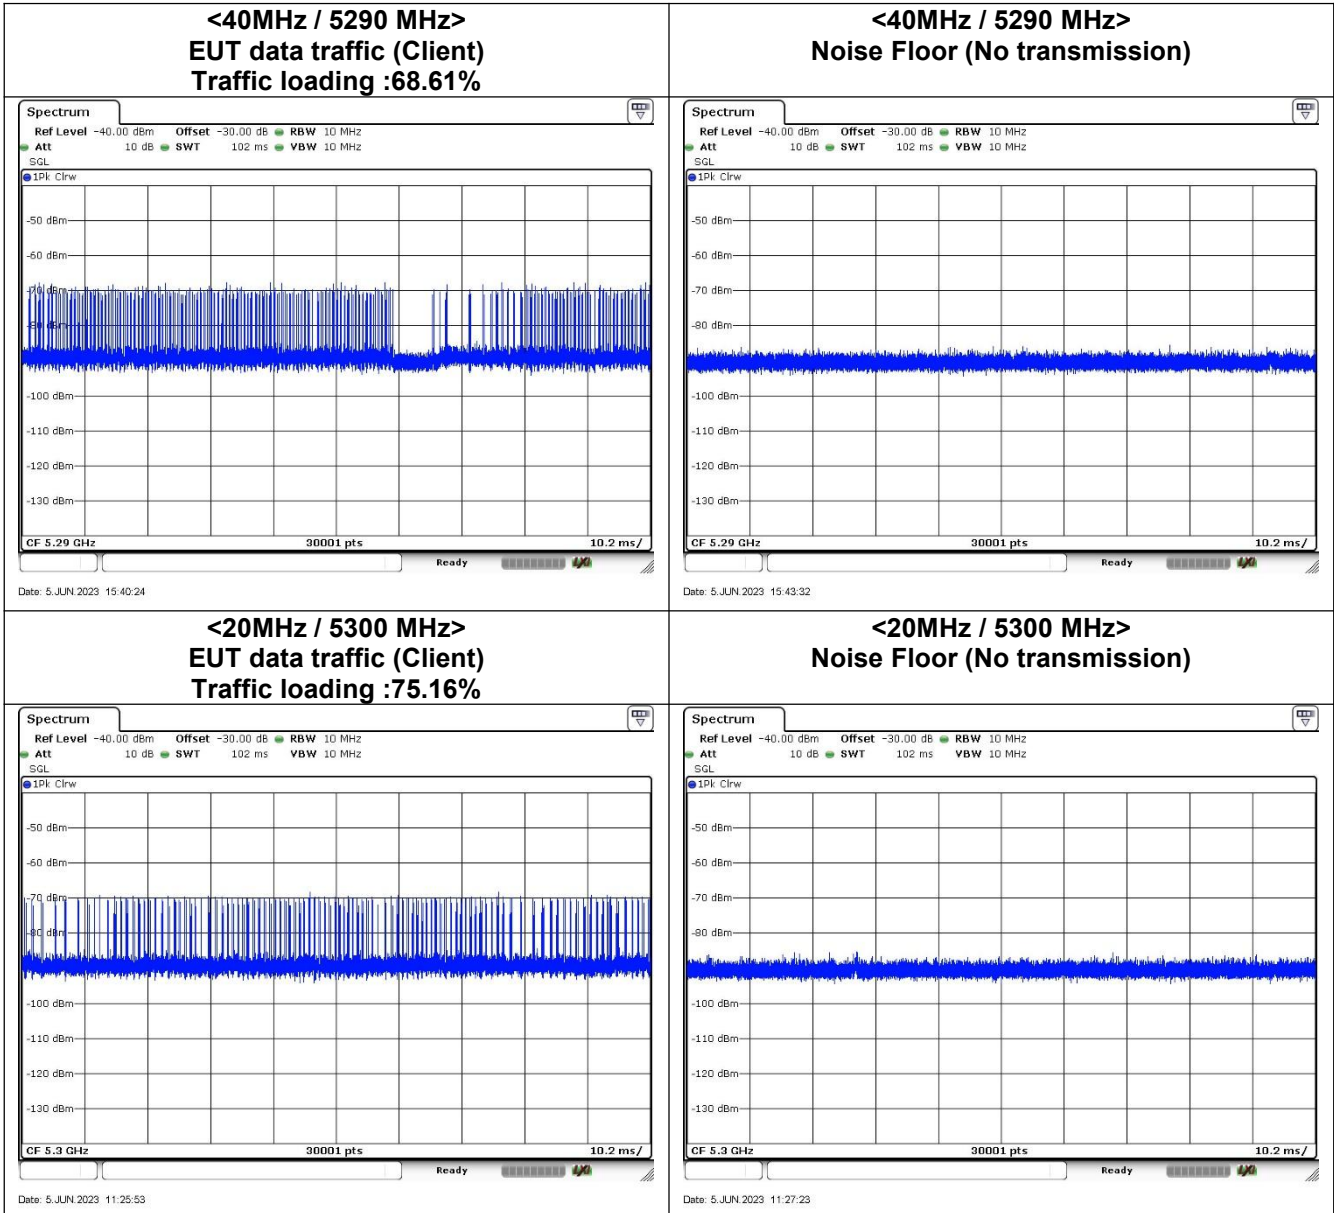





### Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period for Client Beacon Test

Frequency	Test Item	Test Result	Limit	Pass/Fail
5300MHz	Channel Move Time	< 10s*	< 10s	Pass
	Channel Closing Transmission Time	201.2ms	< 260ms	Pass
	Non-Occupancy Period	≥ 30	≥ 30 min	Pass
5290MHz	Channel Move Time	< 10s*	< 10s	Pass
	Channel Closing Transmission Time	201.2ms	< 260ms	Pass
	Non-Occupancy Period	≥ 30	≥ 30 min	Pass

Note\*: We notice clearly that “Channel Move Time” is less than 10s from the figure. The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 seconds period. The aggregate duration of control signals will not count quiet periods in between transmissions.

### Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period for Client Beacon Test Plots

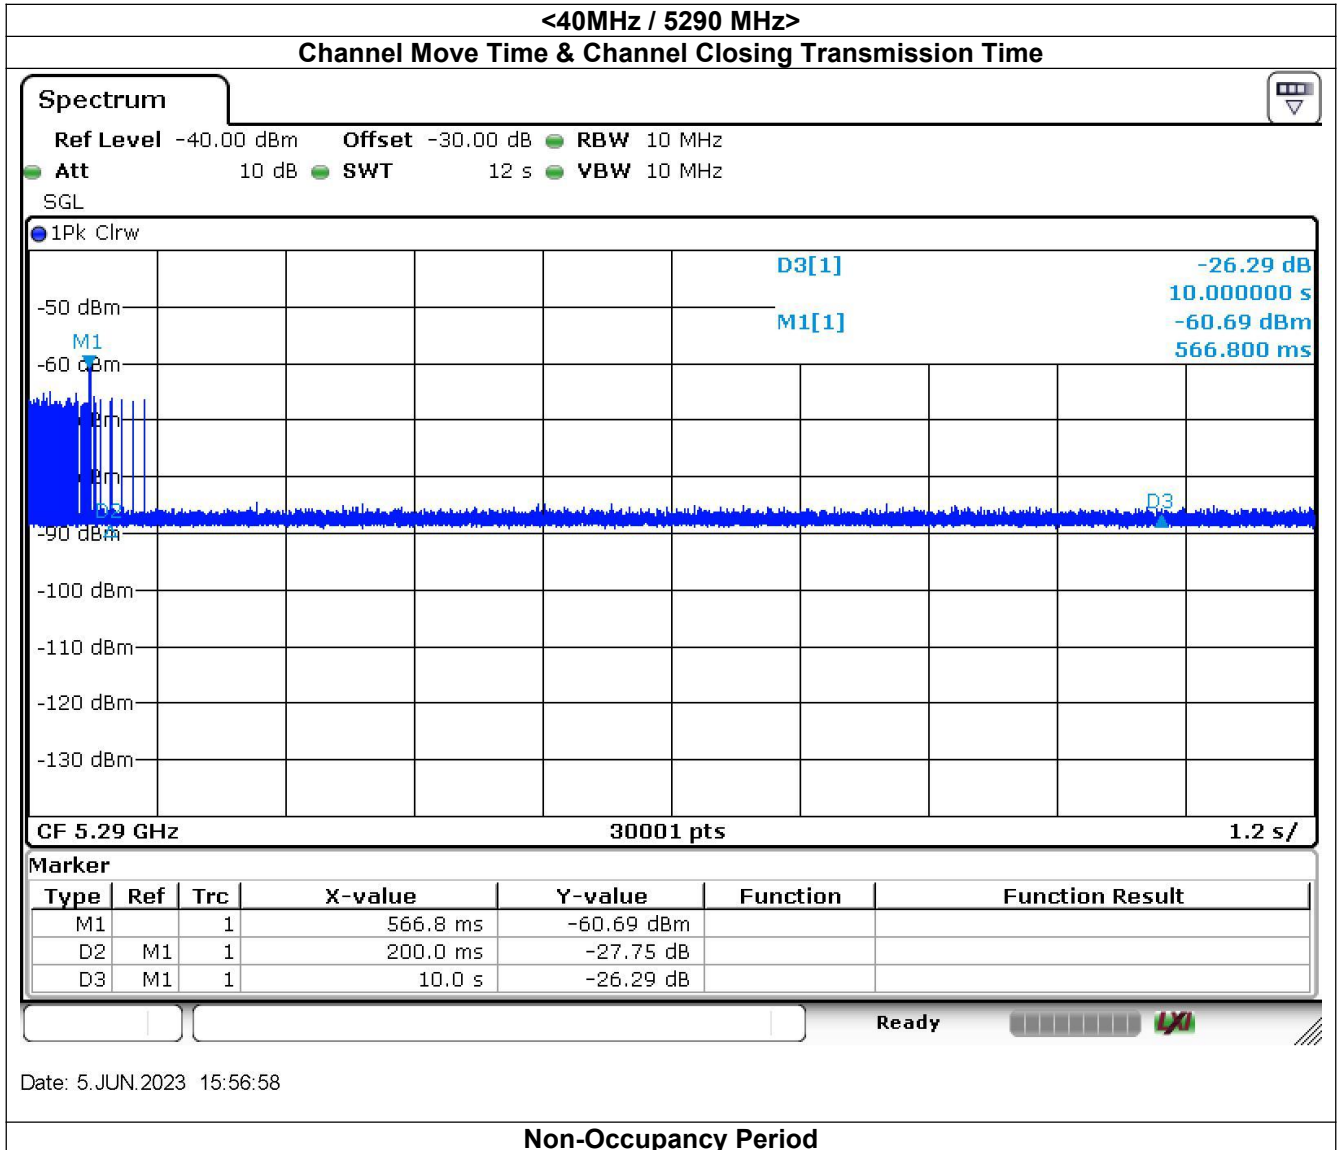

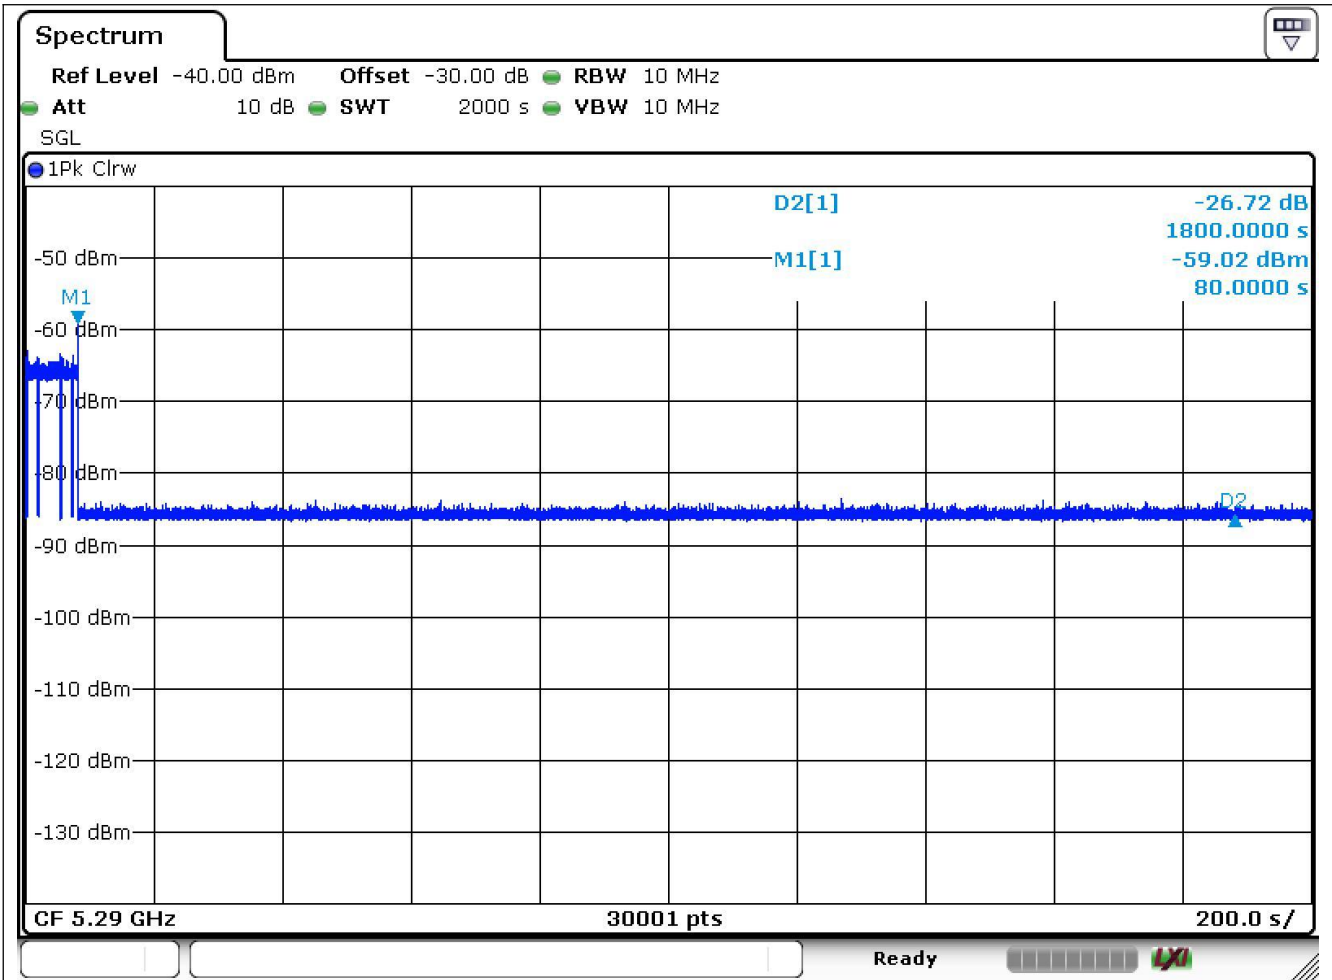

Date: 5.JUN.2023 16:50:43


**Note:**


Dwell (0.4 ms)= Sweep Time (12000 ms) / Sweep Point Bins (30000)

Channel Closing Transmission Time (200 + 1.2 ms) = 200 + Number of beacon after 200ms(3) X Dwell (0.4 ms) < 260ms

<20MHz / 5300MHz>

**Channel Move Time & Channel Closing Transmission Time**

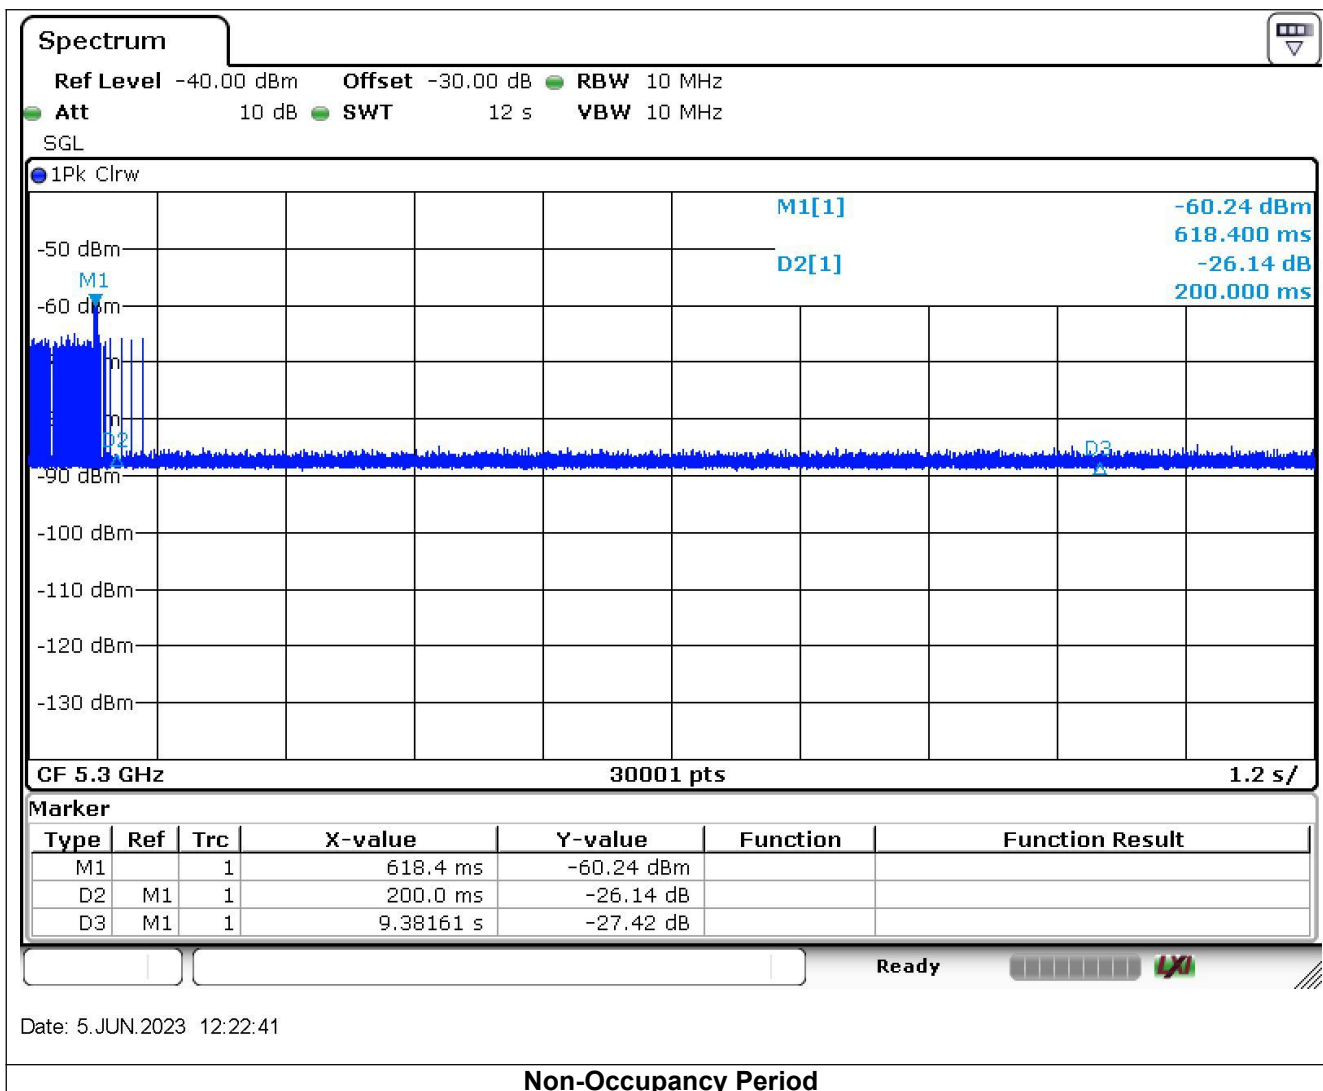

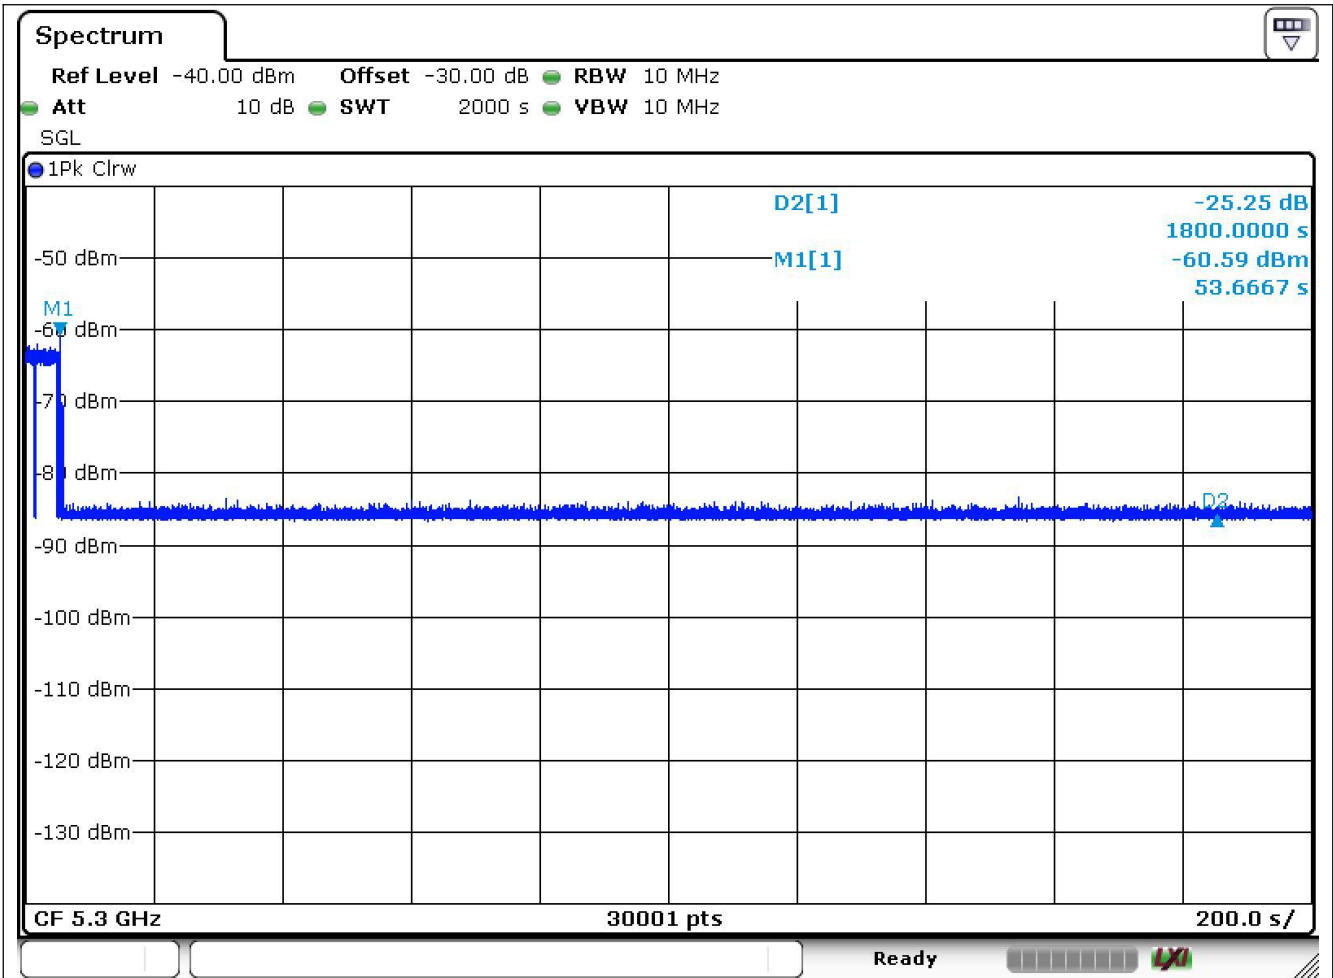

Date: 5.JUN.2023 15:17:00

**Note:**

Dwell (0.4 ms) = Sweep Time (12000 ms) / Sweep Point Bins (30000)  
 Channel Closing Transmission Time (200+1.2 ms) = 200 + Number of beacon after 200ms(3) X Dwell (0.4 ms)  
 < 260ms