

SmartLabs, Inc.

TEST REPORT FOR

SwitchLinc™ On/Off Switch (Dual-Band), 2477S

Tested To The Following Standards:

FCC Part 15 Subpart C Sections 15.207, 15.249
and
RSS-210 Issue 8

Report No.: 92705-4

Date of issue: February 2, 2012



This test report bears the accreditation symbol indicating that the testing performed herein meets the test and reporting requirements of ISO/IEC 17025 under the applicable scope of EMC testing for CKC Laboratories, Inc.

We strive to create long-term, trust based relationships by providing sound, adaptive, customer first testing services. We embrace each of our customers' unique EMC challenges, not as an interruption to set processes, but rather as the reason we are in business.

TABLE OF CONTENTS

Administrative Information	3
Test Report Information	3
Report Authorization	3
Test Facility Information	4
Site Registration & Accreditation Information	4
Summary of Results	5
Conditions During Testing.....	5
Equipment Under Test.....	6
Peripheral Devices	6
FCC Part 15 Subpart C	7
FCC §15.31(e) Voltage Variations	7
FCC §15.207 AC Conducted Emissions.....	9
FCC §15.249 RF Power Output	23
FCC §2.1049(l) -20dBc Occupied Bandwidth	25
Bandedge.....	28
FCC §15.249(b)/(d) Field Strength of Spurious and Harmonic Emissions.....	31
RSS-210	35
99 % Bandwidth.....	35
Supplemental Information.....	38
Measurement Uncertainty	38
Emissions Test Details.....	38

ADMINISTRATIVE INFORMATION

Test Report Information

REPORT PREPARED FOR:

SmartLabs, Inc.
16542 Millikan Ave.
Irvine CA 92606

Representative: John Lockyer
Customer Reference Number: 12-3JL0117-01

DATE OF EQUIPMENT RECEIPT:**DATE(S) OF TESTING:****REPORT PREPARED BY:**

Joyce Walker
CKC Laboratories, Inc.
5046 Sierra Pines Drive
Mariposa, CA 95338


Project Number: 92705

January 25, 2012

January 25, 2012

Report Authorization

The test data contained in this report documents the observed testing parameters pertaining to and are relevant for only the sample equipment tested in the agreed upon operational mode(s) and configuration(s) as identified herein. Compliance assessment remains the client's responsibility. This report may not be used to claim product endorsement by A2LA or any government agencies. This test report has been authorized for release under quality control from CKC Laboratories, Inc.

A handwritten signature in black ink that reads "Steve Behm".

Steve Behm
Director of Quality Assurance & Engineering Services
CKC Laboratories, Inc.

Test Facility Information



Our laboratories are configured to effectively test a wide variety of product types. CKC utilizes first class test equipment, anechoic chambers, data acquisition and information services to create accurate, repeatable and affordable test results.

TEST LOCATION(S):
CKC Laboratories, Inc.
110 Olinda Place
Brea, CA 92823

Site Registration & Accreditation Information

Location	CB #	JAPAN	CANADA	FCC
Brea A	US0060	R-2945, C-3248 & T-1572	3082D-1	90473

SUMMARY OF RESULTS

Standard / Specification: FCC Part 15 Subpart C & RSS-210 Issue 8

Description	Test Procedure/Method	Results
Voltage Variation	FCC Part 15 Subpart C Section 15.31(e)	Pass
Conducted Emissions	FCC Part 15 Subpart C Section 15.207 / ANSI C63.4 (2003)	Pass
RF Power Output	FCC Part 15 Subpart C Section 15.249(a)	Pass
-20dBc Occupied Bandwidth	FCC Part 15 Subpart C Section 15.249(i)	Pass
Bandedge	FCC Part 15 Subpart C	Pass
Field Strength of Spurious and Harmonic Emissions	FCC Part 15 Subpart C Section 15.249(b)/(d)	Pass
99% Bandwidth	RSS-210	Pass

Conditions During Testing

This list is a summary of the conditions noted for or modifications made to the equipment during testing.

Summary of Conditions
None

EQUIPMENT UNDER TEST (EUT)

EQUIPMENT UNDER TEST

SwitchLinc™ On/Off Switch (Dual-Band)

Manuf: SmartLabs, Inc.

Model: 2477S

Serial: NA

PERIPHERAL DEVICES

The EUT was not tested with peripheral devices.

FCC PART 15 SUBPART C

This report contains EMC emissions test results under United States Federal Communications Commission (FCC) 47 CFR 15C requirements for Unlicensed Radio Frequency Devices, Subpart C - Intentional Radiators.

FCC §15.31(e) Voltage Variations

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • (714) 993-6112

Customer: **SmartLabs, Inc.**

Specification: **15.31(e)**

Work Order #: **92705**

Date: 1/25/2012

Test Type: **Maximized Emissions**

Time: 09:20:45

Equipment: **SwitchLinc™ On/Off Switch (Dual-Band)**

Sequence#: 1

Manufacturer: SmartLabs, Inc.

Tested By: E. Wong

Model: 2477S

S/N: NA

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02672	Spectrum Analyzer	E4446A	8/9/2010	8/9/2012
T1	AN01995	Biconilog Antenna	CBL6111C	3/8/2010	3/8/2012
T2	AN00309	Preamp	8447D	5/7/2010	5/7/2012
T3	ANP05050	Cable	RG223/U	3/21/2011	3/21/2013
T4	ANP05198	Cable	8268	12/21/2010	12/21/2012

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
SwitchLinc™ On/Off Switch (Dual-Band)*	SmartLabs, Inc.	2477S	NA

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

The EUT is placed on the wooden table lined with Styrofoam of 10cm thickness. Orientated in the intended position, the EUT is connected to a light bulb. Ground strap is connected to the EUT.

The EUT TX= 915MHz.


Frequency range of measurement = Fundamental

15.31(e) compliance: the supply voltage was varied between 85% and 115% of the nominal rated supply voltage (110vac and 270 Vac); no change in the Fundamental signal level was observed.

30 MHz-1000 MHz;RBW=120 kHz,VBW=120 kHz

Test environment conditions: 18°C, 33% relative humidity, 101kPa

Test Setup Photos

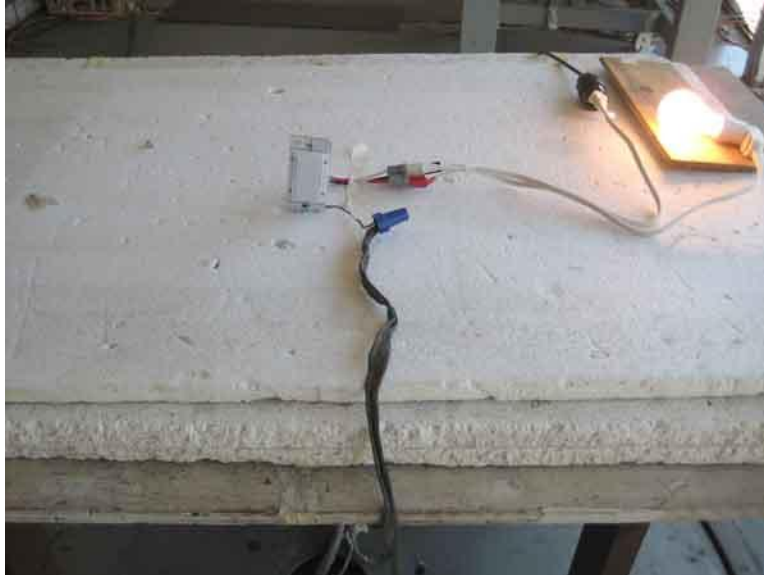

FCC §15.207 AC Conducted Emissions

Test Data Sheets

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • (714) 993-6112

Customer:	SmartLabs, Inc.		
Specification:	15.207 AC Mains - Average		
Work Order #:	92705	Date:	1/25/2012
Test Type:	Conducted Emissions	Time:	15:10:12
Equipment:	SwitchLinc™ On/Off Switch (Dual-Band)	Sequence#:	11
Manufacturer:	SmartLabs, Inc.	Tested By:	E. Wong
Model:	2477S		110V 60Hz
S/N:	NA		

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02672	Spectrum Analyzer	E4446A	8/9/2010	8/9/2012
T1	ANP06084	Attenuator	SA18N10W-06	12/8/2010	12/8/2012
T2	AN02610	High Pass Filter	HE9615-150K-50-720B	11/21/2011	11/21/2013
T3	ANP04358	Cable	RG142	5/7/2010	5/7/2012
T4	AN00847.1	50uH LISN-Line 1 (dB)	3816/2NM	12/21/2010	12/21/2012
	AN00847.1	50uH LISN-Line 2 (dB)	3816/2NM	12/21/2010	12/21/2012

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
SwitchLinc™ On/Off Switch (Dual-Band) *	SmartLabs, Inc.	2477S	NA

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

The EUT is placed on the wooden table lined with Styrofoam of 10cm thickness. Orientated in the intended position, the EUT is connected to a light bulb. Ground strap is connected to the EUT.

The EUT is set in continuous transmit mode.

RX= 915MHz.

Frequency range of measurement = 150kHz- 30MHz.

150 kHz-30 MHz;RBW=9 kHz,VBW=9kHz

Test environment conditions: 18°C, 33% relative humidity, 101kPa

Ext Attn: 0 dB


Measurement Data:

Reading listed by margin.

Test Lead: L1

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V	Spec dB μ V	Margin dB	Polar Ant
1	1.005M	33.0	+5.8	+0.2	+0.1	+0.0	+0.0	39.1	46.0	-6.9	L1
Ave											
^	1.005M	40.8	+5.8	+0.2	+0.1	+0.0	+0.0	46.9	46.0	+0.9	L1
3	885.710k	32.3	+5.8	+0.2	+0.1	+0.0	+0.0	38.4	46.0	-7.6	L1
4	1.086M	31.8	+5.8	+0.2	+0.1	+0.0	+0.0	37.9	46.0	-8.1	L1
5	1.137M	31.8	+5.8	+0.2	+0.1	+0.0	+0.0	37.9	46.0	-8.1	L1
6	732.491k	31.2	+5.8	+0.2	+0.1	+0.0	+0.0	37.3	46.0	-8.7	L1
7	864.115k	31.2	+5.8	+0.2	+0.1	+0.0	+0.0	37.3	46.0	-8.7	L1
8	674.315k	30.7	+5.8	+0.2	+0.1	+0.0	+0.0	36.8	46.0	-9.2	L1
9	801.576k	30.4	+5.8	+0.2	+0.1	+0.0	+0.0	36.5	46.0	-9.5	L1
10	158.725k	38.9	+5.8	+0.7	+0.1	+0.0	+0.0	45.5	55.5	-10.0	L1
11	16.589M	32.5	+5.8	+0.2	+0.3	+0.9	+0.0	39.7	50.0	-10.3	L1
12	1.498M	29.4	+5.8	+0.2	+0.1	+0.0	+0.0	35.5	46.0	-10.5	L1
13	19.715M	31.9	+5.9	+0.2	+0.4	+1.1	+0.0	39.5	50.0	-10.5	L1
Ave											
^	19.715M	38.5	+5.9	+0.2	+0.4	+1.1	+0.0	46.1	50.0	-3.9	L1
15	1.553M	29.4	+5.8	+0.2	+0.1	+0.0	+0.0	35.5	46.0	-10.5	L1
16	1.681M	29.4	+5.8	+0.2	+0.1	+0.0	+0.0	35.5	46.0	-10.5	L1
17	1.617M	29.4	+5.8	+0.2	+0.1	+0.0	+0.0	35.5	46.0	-10.5	L1

CKC Laboratories, Inc. Date: 1/25/2012 Time: 15:10:12 SmartLabs, Inc. WO#: 92705
 15.207 AC Mains - Average Test Lead: L1 110V 60Hz Sequence#: 11 Ext ATTN: 0 dB

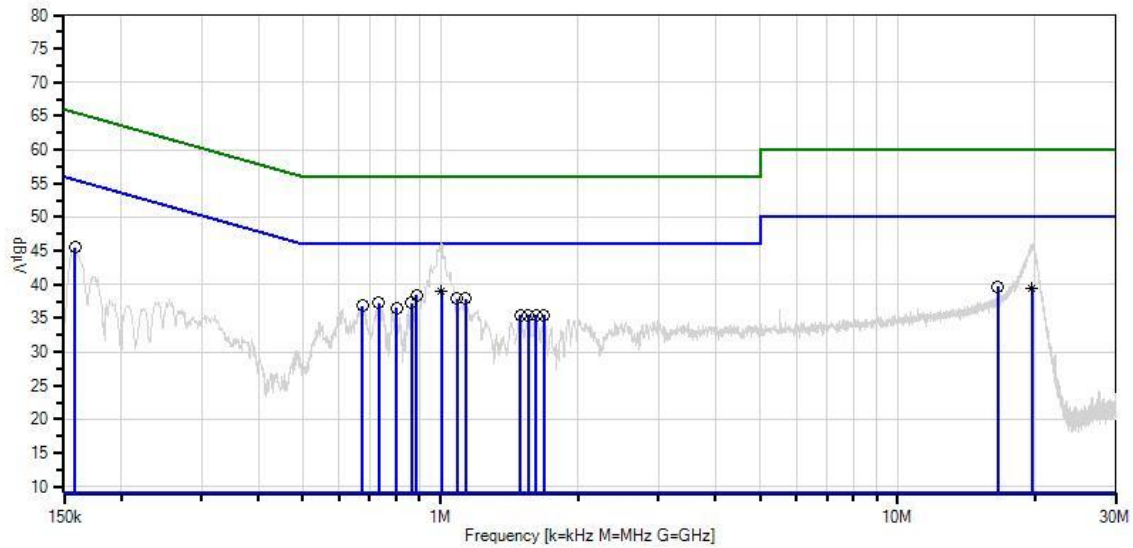

— Sweep Data	— Readings
○ Peak Readings	× QP Readings
* Average Readings	▼ Ambient
— 1 - 15.207 AC Mains - Average	— 2 - 15.207 AC Mains - Quasi-peak

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • (714) 993-6112

Customer: **SmartLabs, Inc.**
 Specification: **15.207 AC Mains - Average**
 Work Order #: **92705** Date: 1/25/2012
 Test Type: **Conducted Emissions** Time: 15:06:35
 Equipment: **SwitchLinc™ On/Off Switch (Dual-Band)** Sequence#: 10
 Manufacturer: SmartLabs, Inc. Tested By: E. Wong
 Model: 2477S 110V 60Hz
 S/N: NA

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02672	Spectrum Analyzer	E4446A	8/9/2010	8/9/2012
T1	ANP06084	Attenuator	SA18N10W-06	12/8/2010	12/8/2012
T2	AN02610	High Pass Filter	HE9615-150K-50-720B	11/21/2011	11/21/2013
T3	ANP04358	Cable	RG142	5/7/2010	5/7/2012
	AN00847.1	50uH LISN-Line 1 (dB)	3816/2NM	12/21/2010	12/21/2012
T4	AN00847.1	50uH LISN-Line 2 (dB)	3816/2NM	12/21/2010	12/21/2012

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
SwitchLinc™ On/Off Switch (Dual-Band) *	SmartLabs, Inc.	2477S	NA

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

The EUT is placed on the wooden table lined with Styrofoam of 10cm thickness. Orientated in the intended position, the EUT is connected to a light bulb. Ground strap is connected to the EUT.

The EUT is set in continuous transmit mode.

RX= 915MHz.

Frequency range of measurement = 150kHz- 30MHz.

150 kHz-30 MHz;RBW=9 kHz,VBW=9kHz

Test environment conditions: 18°C, 33% relative humidity, 101kPa

Ext Attn: 0 dB


Measurement Data:

Reading listed by margin.

Test Lead: L2

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	19.824M	38.4	+5.9	+0.2	+0.4	+1.2	+0.0	46.1	50.0	-3.9	L2
2	936.743k	35.0	+5.8	+0.2	+0.1	+0.0	+0.0	41.1	46.0	-4.9	L2
3	1.002M	33.0	+5.8	+0.2	+0.1	+0.0	+0.0	39.1	46.0	-6.9	L2
Ave											
^	1.001M	40.0	+5.8	+0.2	+0.1	+0.0	+0.0	46.1	46.0	+0.1	L2
5	158.725k	40.9	+5.8	+0.7	+0.1	+0.0	+0.0	47.5	55.5	-8.0	L2
6	16.589M	34.1	+5.8	+0.2	+0.3	+1.0	+0.0	41.4	50.0	-8.6	L2
7	800.121k	30.4	+5.8	+0.2	+0.1	+0.0	+0.0	36.5	46.0	-9.5	L2
8	864.115k	30.0	+5.8	+0.2	+0.1	+0.0	+0.0	36.1	46.0	-9.9	L2
9	733.218k	29.9	+5.8	+0.2	+0.1	+0.0	+0.0	36.0	46.0	-10.0	L2
10	173.270k	38.1	+5.8	+0.4	+0.1	+0.0	+0.0	44.4	54.8	-10.4	L2
11	1.604M	29.2	+5.8	+0.2	+0.1	+0.1	+0.0	35.4	46.0	-10.6	L2
12	664.134k	29.1	+5.8	+0.2	+0.1	+0.0	+0.0	35.2	46.0	-10.8	L2
13	1.477M	28.8	+5.8	+0.2	+0.1	+0.1	+0.0	35.0	46.0	-11.0	L2
14	1.545M	28.6	+5.8	+0.2	+0.1	+0.1	+0.0	34.8	46.0	-11.2	L2
15	2.008M	28.3	+5.8	+0.2	+0.1	+0.1	+0.0	34.5	46.0	-11.5	L2
16	1.039M	25.3	+5.8	+0.2	+0.1	+0.0	+0.0	31.4	46.0	-14.6	L2
Ave											
^	1.039M	36.3	+5.8	+0.2	+0.1	+0.0	+0.0	42.4	46.0	-3.6	L2

CKC Laboratories, Inc. Date: 1/25/2012 Time: 15:06:35 SmartLabs, Inc. WO#: 92705
15.207 AC Mains - Average Test Lead: L2 110V 60Hz Sequence#: 10 Ext ATTN: 0 dB

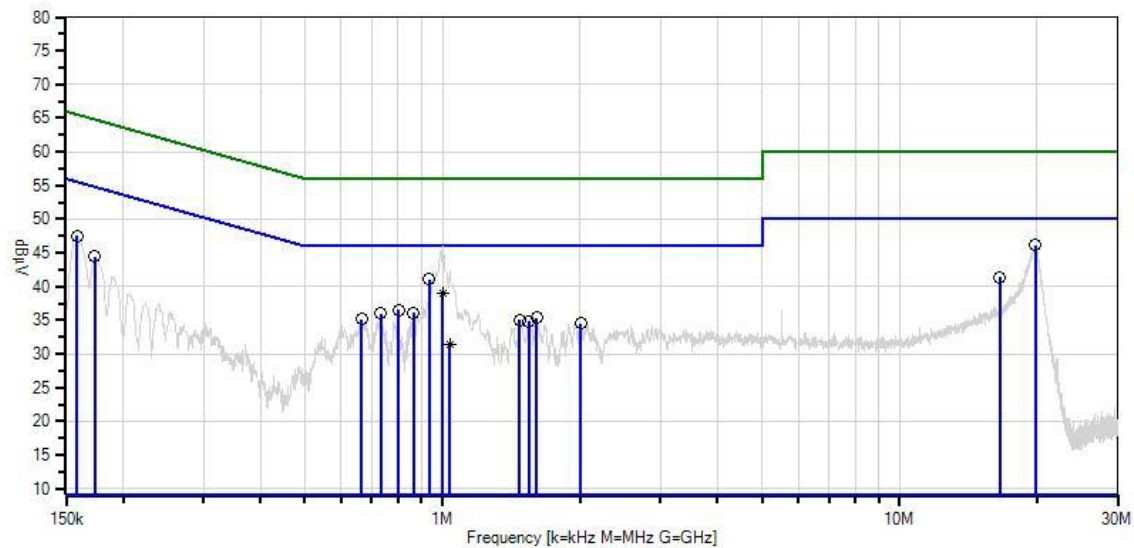

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • (714) 993-6112

Customer: **SmartLabs, Inc.**
 Specification: **15.207 AC Mains - Average**
 Work Order #: **92705** Date: 1/25/2012
 Test Type: **Conducted Emissions** Time: 14:56:21
 Equipment: **SwitchLinc™ On/Off Switch (Dual-Band)** Sequence#: 8
 Manufacturer: SmartLabs, Inc. Tested By: E. Wong
 Model: 2477S 277Vac 60Hz
 S/N: NA

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02672	Spectrum Analyzer	E4446A	8/9/2010	8/9/2012
T1	ANP06084	Attenuator	SA18N10W-06	12/8/2010	12/8/2012
T2	AN02610	High Pass Filter	HE9615-150K-50-720B	11/21/2011	11/21/2013
T3	ANP04358	Cable	RG142	5/7/2010	5/7/2012
T4	AN00847.1	50uH LISN-Line 1 (dB)	3816/2NM	12/21/2010	12/21/2012
	AN00847.1	50uH LISN-Line 2 (dB)	3816/2NM	12/21/2010	12/21/2012

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
SwitchLinc™ On/Off Switch (Dual-Band) *	SmartLabs, Inc.	2477S	NA

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

The EUT is placed on the wooden table lined with Styrofoam of 10cm thickness. Orientated in the intended position, the EUT is connected to a light bulb. Ground strap is connected to the EUT.

The EUT is set in continuous transmit mode.

RX= 915MHz.

Frequency range of measurement = 150kHz- 30MHz.

150 kHz-30 MHz;RBW=9 kHz,VBW=9kHz

Test environment conditions: 18°C, 33% relative humidity, 101kPa

Ext Attn: 0 dB


Measurement Data:

Reading listed by margin.

Test Lead: L1

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	483.787k	36.2	+5.7	+0.2	+0.1	+0.0	+0.0	42.2	46.3	-4.1	L1
2	1.264M	34.1	+5.8	+0.2	+0.1	+0.0	+0.0	40.2	46.0	-5.8	L1
3	14.598M	36.6	+5.8	+0.2	+0.3	+0.8	+0.0	43.7	50.0	-6.3	L1
4	16.589M	36.1	+5.8	+0.2	+0.3	+0.9	+0.0	43.3	50.0	-6.7	L1
Ave											
^	16.589M	40.8	+5.8	+0.2	+0.3	+0.9	+0.0	48.0	50.0	-2.0	L1
6	285.987k	37.8	+5.7	+0.2	+0.1	+0.0	+0.0	43.8	50.6	-6.8	L1
7	1.558M	33.1	+5.8	+0.2	+0.1	+0.0	+0.0	39.2	46.0	-6.8	L1
8	2.319M	32.9	+5.8	+0.2	+0.2	+0.0	+0.0	39.1	46.0	-6.9	L1
9	245.990k	38.8	+5.8	+0.2	+0.1	+0.0	+0.0	44.9	51.9	-7.0	L1
10	4.241M	32.8	+5.8	+0.1	+0.2	+0.1	+0.0	39.0	46.0	-7.0	L1
11	1.014M	32.8	+5.8	+0.2	+0.1	+0.0	+0.0	38.9	46.0	-7.1	L1
Ave											
12	3.280M	32.7	+5.8	+0.1	+0.2	+0.1	+0.0	38.9	46.0	-7.1	L1
13	1.016M	32.7	+5.8	+0.2	+0.1	+0.0	+0.0	38.8	46.0	-7.2	L1
Ave											
^	1.018M	41.7	+5.8	+0.2	+0.1	+0.0	+0.0	47.8	46.0	+1.8	L1
^	1.016M	32.7	+5.8	+0.2	+0.1	+0.0	+0.0	38.8	46.0	-7.2	L1
16	232.900k	39.0	+5.8	+0.2	+0.1	+0.0	+0.0	45.1	52.3	-7.2	L1
17	164.543k	41.6	+5.8	+0.5	+0.1	+0.0	+0.0	48.0	55.2	-7.2	L1
18	17.481M	35.2	+5.9	+0.2	+0.4	+1.0	+0.0	42.7	50.0	-7.3	L1
Ave											
^	17.481M	39.3	+5.9	+0.2	+0.4	+1.0	+0.0	46.8	50.0	-3.2	L1
20	996.281k	29.9	+5.8	+0.2	+0.1	+0.0	+0.0	36.0	46.0	-10.0	L1
Ave											
^	996.281k	38.4	+5.8	+0.2	+0.1	+0.0	+0.0	44.5	46.0	-1.5	L1

CKC Laboratories, Inc. Date: 1/25/2012 Time: 14:56:21 SmartLabs, Inc. WO#: 92705
15.207 AC Mains - Average Test Lead: L1 277Vac 60Hz Sequence#: 8 Ext ATTN: 0 dB

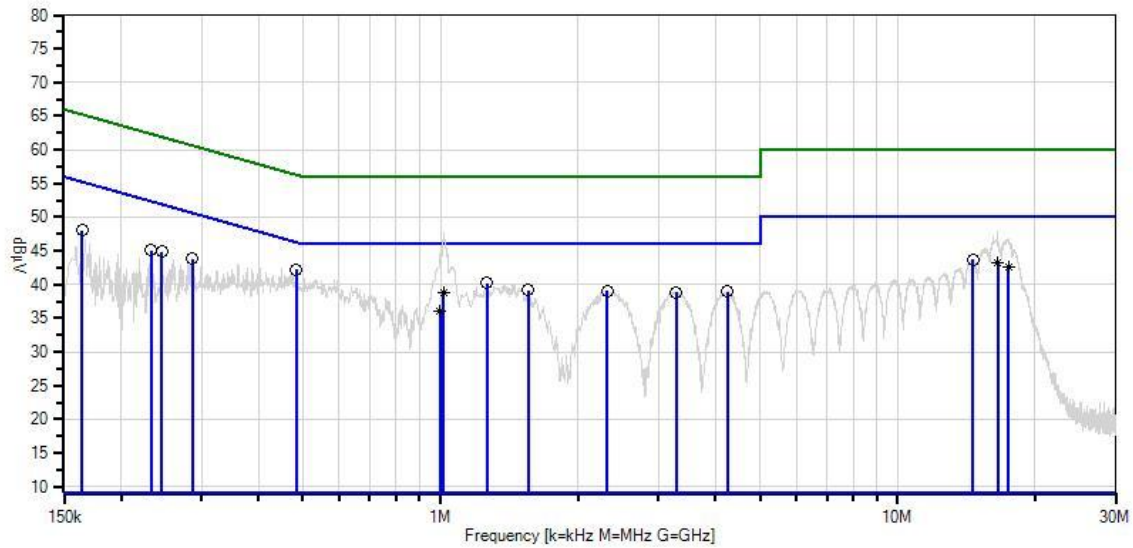

— Sweep Data	— Readings
○ Peak Readings	× QP Readings
* Average Readings	▼ Ambient
— 1 - 15.207 AC Mains - Average	— 2 - 15.207 AC Mains - Quasi-peak

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • (714) 993-6112

Customer: **SmartLabs, Inc.**
 Specification: **15.207 AC Mains - Average**
 Work Order #: **92705** Date: 1/25/2012
 Test Type: **Conducted Emissions** Time: 14:59:58
 Equipment: **SwitchLinc™ On/Off Switch (Dual-Band)** Sequence#: 9
 Manufacturer: SmartLabs, Inc. Tested By: E. Wong
 Model: 2477S 277Vac 60Hz
 S/N: NA

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02672	Spectrum Analyzer	E4446A	8/9/2010	8/9/2012
T1	ANP06084	Attenuator	SA18N10W-06	12/8/2010	12/8/2012
T2	AN02610	High Pass Filter	HE9615-150K-50-720B	11/21/2011	11/21/2013
T3	ANP04358	Cable	RG142	5/7/2010	5/7/2012
	AN00847.1	50uH LISN-Line 1 (dB)	3816/2NM	12/21/2010	12/21/2012
T4	AN00847.1	50uH LISN-Line 2 (dB)	3816/2NM	12/21/2010	12/21/2012

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
SwitchLinc™ On/Off Switch (Dual-Band) *	SmartLabs, Inc.	2477S	NA

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

The EUT is placed on the wooden table lined with Styrofoam of 10cm thickness. Orientated in the intended position, the EUT is connected to a light bulb. Ground strap is connected to the EUT.

The EUT is set in continuous transmit mode.

RX= 915MHz.

Frequency range of measurement = 150kHz- 30MHz.

150 kHz-30 MHz;RBW=9 kHz,VBW=9kHz

Test environment conditions: 18°C, 33% relative humidity, 101kPa

Ext Attn: 0 dB


Measurement Data:

Reading listed by margin.

Test Lead: L2

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	453.244k	37.2	+5.7	+0.2	+0.1	+0.0	+0.0	43.2	46.8	-3.6	L2
2	17.517M	38.1	+5.9	+0.2	+0.4	+1.1	+0.0	45.7	50.0	-4.3	L2
3	538.327k	35.4	+5.8	+0.2	+0.1	+0.0	+0.0	41.5	46.0	-4.5	L2
4	179.087k	43.6	+5.8	+0.3	+0.1	+0.0	+0.0	49.8	54.5	-4.7	L2
5	266.352k	40.3	+5.8	+0.2	+0.1	+0.0	+0.0	46.4	51.2	-4.8	L2
6	443.063k	36.1	+5.7	+0.2	+0.1	+0.0	+0.0	42.1	47.0	-4.9	L2
7	362.343k	37.8	+5.7	+0.2	+0.1	+0.0	+0.0	43.8	48.7	-4.9	L2
8	420.520k	36.4	+5.7	+0.2	+0.1	+0.0	+0.0	42.4	47.4	-5.0	L2
9	520.147k	35.0	+5.7	+0.2	+0.1	+0.0	+0.0	41.0	46.0	-5.0	L2
10	546.326k	34.9	+5.8	+0.2	+0.1	+0.0	+0.0	41.0	46.0	-5.0	L2
11	462.698k	35.5	+5.7	+0.2	+0.1	+0.0	+0.0	41.5	46.6	-5.1	L2
12	15.770M	37.6	+5.8	+0.2	+0.3	+1.0	+0.0	44.9	50.0	-5.1	L2
13	16.589M	35.4	+5.8	+0.2	+0.3	+1.0	+0.0	42.7	50.0	-7.3	L2
Ave											
^	16.589M	40.5	+5.8	+0.2	+0.3	+1.0	+0.0	47.8	50.0	-2.2	L2
15	1.005M	32.1	+5.8	+0.2	+0.1	+0.0	+0.0	38.2	46.0	-7.8	L2
Ave											
^	1.005M	39.5	+5.8	+0.2	+0.1	+0.0	+0.0	45.6	46.0	-0.4	L2
17	1.043M	26.3	+5.8	+0.2	+0.1	+0.0	+0.0	32.4	46.0	-13.6	L2
Ave											
^	1.043M	36.7	+5.8	+0.2	+0.1	+0.0	+0.0	42.8	46.0	-3.2	L2

CKC Laboratories, Inc. Date: 1/25/2012 Time: 14:59:58 SmartLabs, Inc. WO#: 92705
15.207 AC Mains - Average Test Lead: L2 277Vac 60Hz Sequence#: 9 Ext ATTN: 0 dB

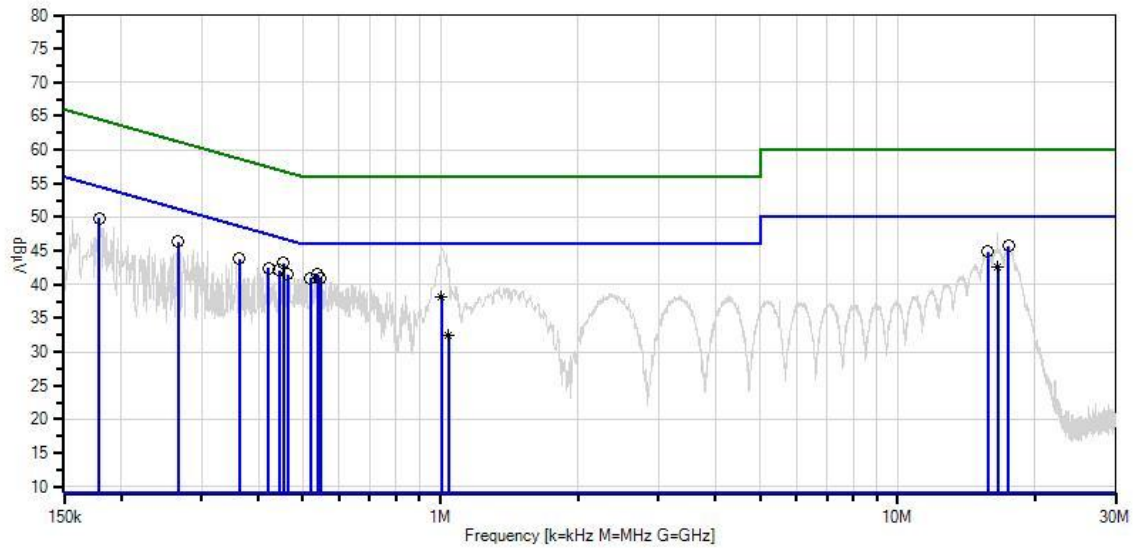


— Sweep Data	— Readings
○ Peak Readings	× QP Readings
* Average Readings	▼ Ambient
— 1 - 15.207 AC Mains - Average	— 2 - 15.207 AC Mains - Quasi-peak

Test Setup Photos



110V 60Hz Test Setup

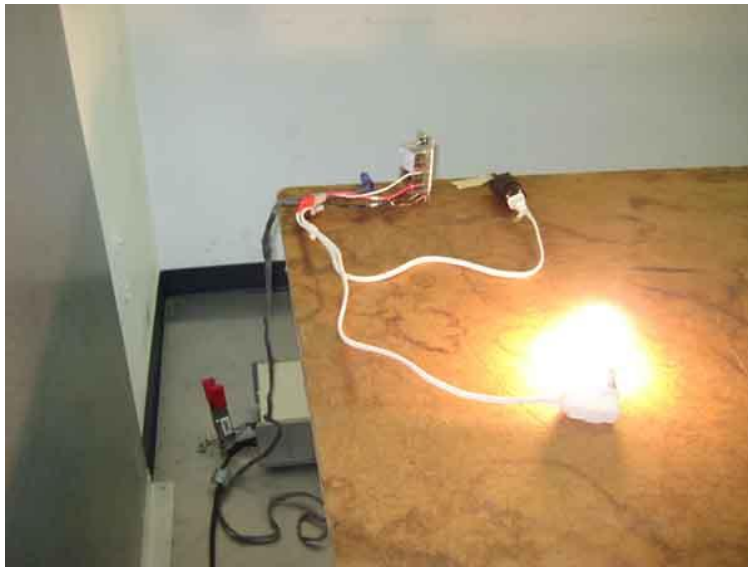

110V 60Hz Test Setup



227V 60Hz Test Setup



227V 60Hz Test Setup

FCC §15.249(a) RF Power Output

Test Data

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • (714) 993-6112

Customer: **SmartLabs, Inc.**

Specification: **15.249 Carrier and Spurious Emissions (902-928 MHz Transmitter)**

Work Order #: **92705**

Date: 1/25/2012

Test Type: **Maximized Emissions**

Time: 09:20:45

Equipment: **SwitchLinc™ On/Off Switch (Dual-Band)**

Sequence#: 1

Manufacturer: SmartLabs, Inc.

Tested By: E. Wong

Model: 2477S

S/N: NA

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02672	Spectrum Analyzer	E4446A	8/9/2010	8/9/2012
T1	AN01995	Biconilog Antenna	CBL6111C	3/8/2010	3/8/2012
T2	AN00309	Preamplifier	8447D	5/7/2010	5/7/2012
T3	ANP05050	Cable	RG223/U	3/21/2011	3/21/2013
T4	ANP05198	Cable	8268	12/21/2010	12/21/2012

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
SwitchLinc™ On/Off Switch (Dual-Band) *	SmartLabs, Inc.	2477S	NA

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

The EUT is placed on the wooden table lined with Styrofoam of 10cm thickness. Orientated in the intended position, the EUT is connected to a light bulb. Ground strap is connected to the EUT.

The EUT is set in continuous transmit mode.

TX= 915MHz.

15.31(e) compliance: the supply voltage was varied between 85% and 115% of the nominal rated supply voltage (110vac and 270 Vac); no change in the Fundamental signal level was observed.

Frequency range of measurement = Fundamental

30 MHz-1000 MHz;RBW=120 kHz,VBW=120 kHz

Test environment conditions: 18°C, 33% relative humidity, 101kPa

Ext Attn: 0 dB


Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	914.927M	82.3	+23.6	-27.1	+0.5	+5.8	+0.0	85.1	94.0	-8.9	Vert
2	915.083M	81.3	+23.6	-27.1	+0.5	+5.8	+0.0	84.1	94.0	-9.9	Horiz

Test Setup Photos

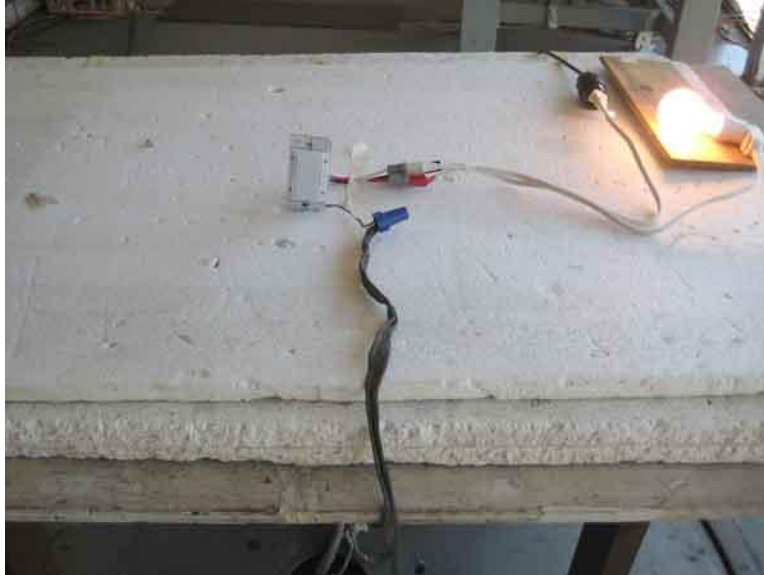

FCC §2.1049(I) -20dBc Occupied Bandwidth

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • (714) 993-6112

Customer: **SmartLabs, Inc.**

Specification: **-20db BW**

Work Order #: **92705**

Date: 1/25/2012

Test Type: **Maximized Emissions**

Time: 09:20:45

Equipment: **SwitchLinc™ On/Off Switch (Dual-Band)**

Sequence#: 1

Manufacturer: SmartLabs, Inc.

Tested By: E. Wong

Model: 2477S

S/N: NA

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02672	Spectrum Analyzer	E4446A	8/9/2010	8/9/2012
T1	AN01995	Biconilog Antenna	CBL6111C	3/8/2010	3/8/2012
T2	AN00309	Preamp	8447D	5/7/2010	5/7/2012
T3	ANP05050	Cable	RG223/U	3/21/2011	3/21/2013
T4	ANP05198	Cable	8268	12/21/2010	12/21/2012

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
SwitchLinc™ On/Off Switch (Dual-Band)*	SmartLabs, Inc.	2477S	NA


Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----


Test Conditions / Notes:

The EUT is placed on the wooden table lined with Styrofoam of 10cm thickness. Orientated in the intended position, the EUT is connected to a light bulb. Ground strap is connected to the EUT.
The EUT TX= 915MHz.
Frequency range of measurement = Fundamental
30 MHz-1000 MHz;RBW=120 kHz,VBW=120 kHz
Test environment conditions: 18°C, 33% relative humidity, 101kPa

Test Plot

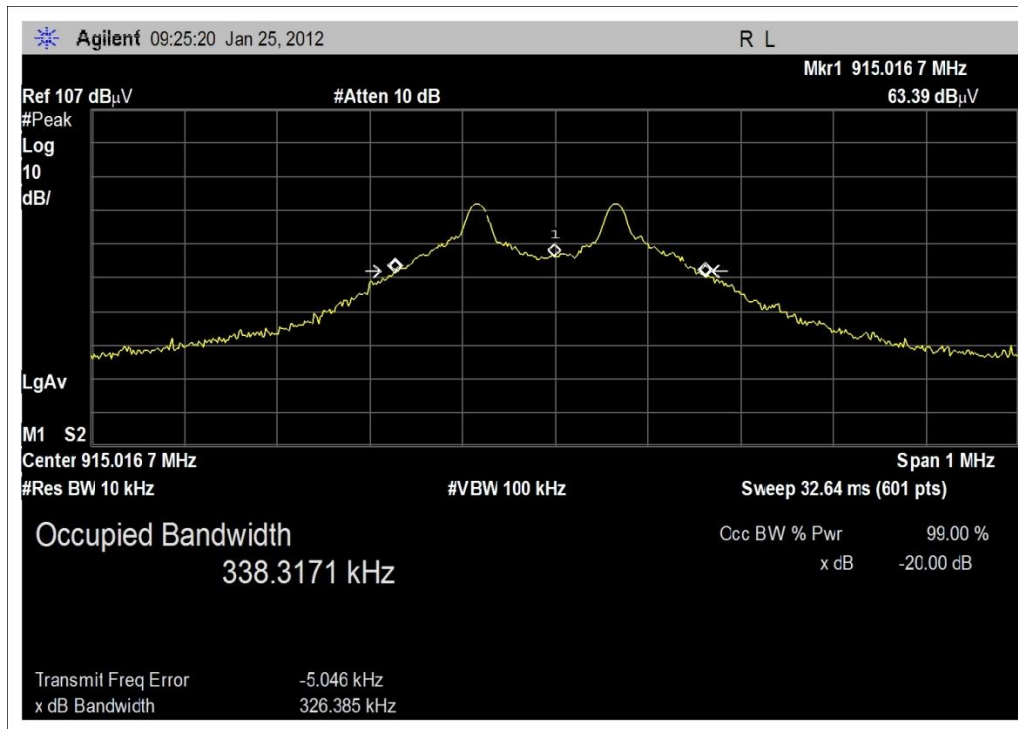

Test Setup Photos

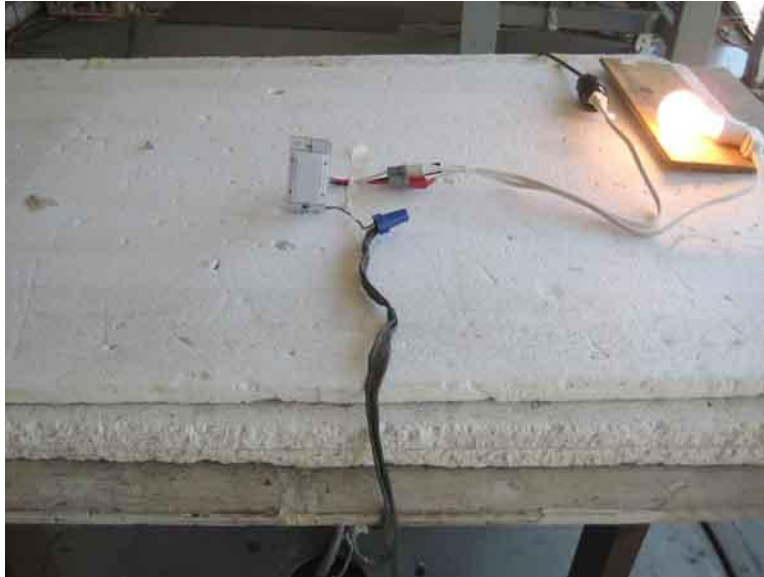

Bandedge

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • (714) 993-6112

Customer: **SmartLabs, Inc.**

Specification: **Bandedge plot**

Work Order #: **92705**

Date: 1/25/2012

Test Type: **Maximized Emissions**

Time: 09:20:45

Equipment: **SwitchLinc™ On/Off Switch (Dual-Band)**

Sequence#: 1

Manufacturer: SmartLabs, Inc.

Tested By: E. Wong

Model: 2477S

S/N: NA

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02672	Spectrum Analyzer	E4446A	8/9/2010	8/9/2012
T1	AN01995	Biconilog Antenna	CBL6111C	3/8/2010	3/8/2012
T2	AN00309	Preamplifier	8447D	5/7/2010	5/7/2012
T3	ANP05050	Cable	RG223/U	3/21/2011	3/21/2013
T4	ANP05198	Cable	8268	12/21/2010	12/21/2012

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
SwitchLinc™ On/Off Switch (Dual-Band)*	SmartLabs, Inc.	2477S	NA


Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----


Test Conditions / Notes:

The EUT is placed on the wooden table lined with Styrofoam of 10cm thickness. Orientated in the intended position, the EUT is connected to a light bulb. Ground strap is connected to the EUT.
 The EUT TX= 915MHz.
 Frequency range of measurement = Fundamental
 30 MHz-1000 MHz;RBW=120 kHz,VBW=120 kHz
 Test environment conditions: 18°C, 33% relative humidity, 101kPa

Test Plots

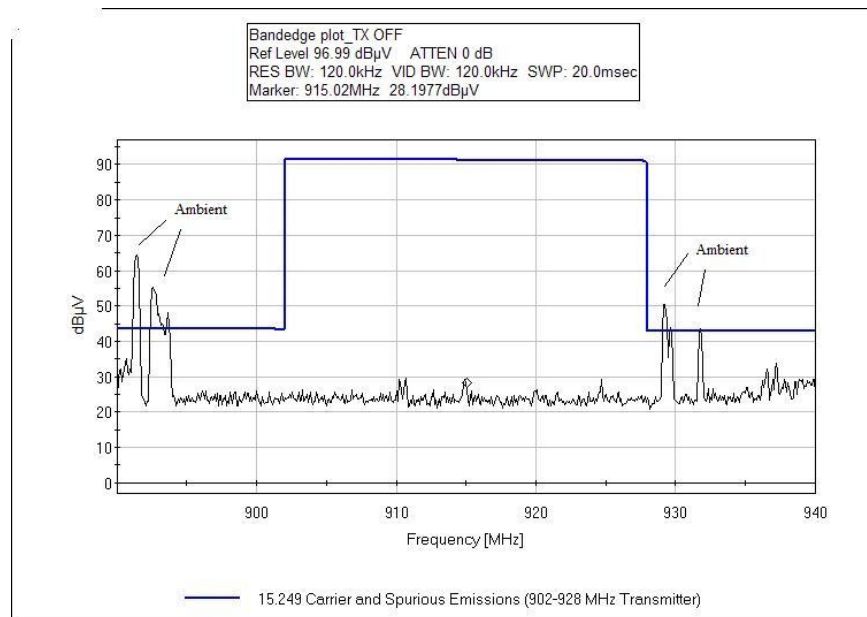

Transmitter Off

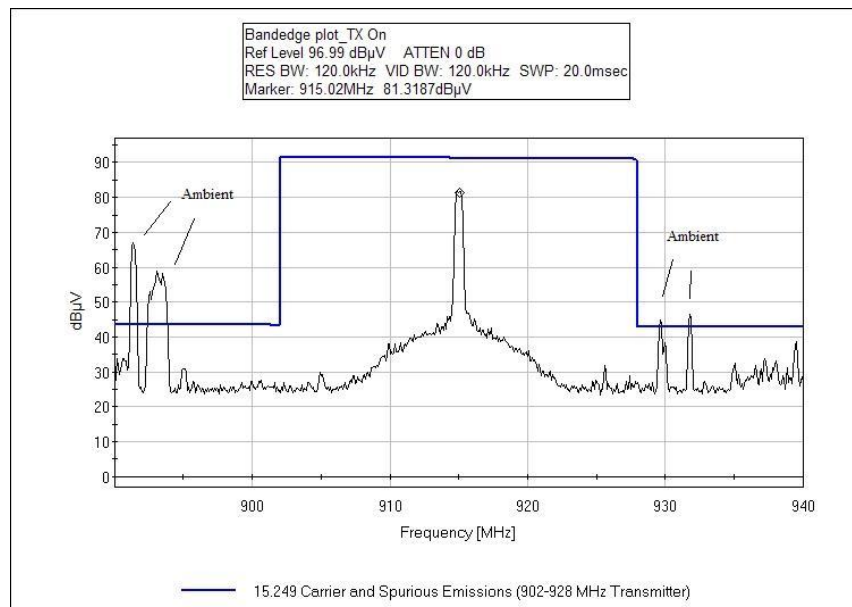

Transmitter On

Test Setup Photos



FCC §15.249(b)/(d) Field Strength of Spurious and Harmonic Emissions

Test Data Sheets

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • (714) 993-6112

Customer: **SmartLabs, Inc.**

Specification: **15.249 Carrier and Spurious Emissions (902-928 MHz Transmitter)**

Work Order #: **92705**

Date: 1/25/2012

Test Type: **Maximized Emissions**

Time: 10:33:52

Equipment: **SwitchLinc™ On/Off Switch (Dual-Band)**

Sequence#: 2

Manufacturer: SmartLabs, Inc.

Tested By: E. Wong

Model: 2477S

S/N: NA

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02672	Spectrum Analyzer	E4446A	8/9/2010	8/9/2012
T2	AN01995	Biconilog Antenna	CBL6111C	3/8/2010	3/8/2012
T3	AN00309	Preamplifier	8447D	5/7/2010	5/7/2012
T4	ANP05050	Cable	RG223/U	3/21/2011	3/21/2013
T5	ANP05198	Cable	8268	12/21/2010	12/21/2012
T6	AN00849	Horn Antenna	3115	4/23/2010	4/23/2012
T7	AN00786	Preamplifier	83017A	8/5/2010	8/5/2012
T8	AN03239	Cable	32022-2-29094K-24TC	8/30/2011	8/30/2013
T9	ANP05421	Cable	Sucoflex 104A	2/12/2010	2/12/2012
T10	ANP05563	Cable	ANDL-1-PNMN-48	9/3/2010	9/3/2012
	AN00314	Loop Antenna	6502	6/30/2010	6/30/2012
	AN02749	High Pass Filter	9SH10-1000/T10000-O/O	11/22/2011	11/22/2013

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
SwitchLinc™ On/Off Switch (Dual-Band) *	SmartLabs, Inc.	2477S	NA

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

The EUT is placed on the wooden table lined with Styrofoam of 10cm thickness. Orientated in the intended position, the EUT is connected to a light bulb. Ground strap is connected to the EUT.

The EUT is set in continuous transmit mode.

TX= 915MHz.

15.31(e) compliance: the supply voltage was varied between 85% and 115% of the nominal rated supply voltage (110vac and 277 Vac) , no change in the Fundamental signal level was observed.

Frequency range of measurement = 9 kHz- 10 GHz.

9 kHz -150 kHz;RBW=200 Hz,VBW=200 Hz;150 kHz-30 MHz;RBW=9 kHz,VBW=9 kHz;30 MHz-1000 MHz;RBW=120 kHz,VBW=120 kHz,1000 MHz-10000 MHz;RBW=1 MHz,VBW=1 MHz.

Test environment conditions: 18°C, 33% relative humidity, 101kPa

Ext Attn: 0 dB

Measurement Data:


Reading listed by margin.

Test Distance: 3 Meters


#	Freq	Rdng	T1 T5 T9	T2 T6 T10	T3 T7	T4 T8	Dist	Corr	Spec	Margin	Polar
	MHz	dBμV	dB	dB	dB	dB	Table	dBμV/m	dBμV/m	dB	Ant
1	1830.000M	53.8	+0.0	+0.0	+0.0	+0.0	+0.0	46.8	54.0	-7.2	Vert
	Ave		+0.0	+27.2	-38.2	+0.3					
			+1.0	+2.7							
^	1830.000M	56.4	+0.0	+0.0	+0.0	+0.0	+0.0	49.4	54.0	-4.6	Vert
			+0.0	+27.2	-38.2	+0.3					
			+1.0	+2.7							
3	40.800M	46.6	+0.0	+12.8	-27.8	+0.1	+0.0	32.7	40.0	-7.3	Vert
			+1.0	+0.0	+0.0	+0.0					
			+0.0	+0.0							
4	1830.156M	52.7	+0.0	+0.0	+0.0	+0.0	+0.0	45.7	54.0	-8.3	Horiz
	Ave		+0.0	+27.2	-38.2	+0.3					
			+1.0	+2.7							
^	1830.156M	56.1	+0.0	+0.0	+0.0	+0.0	+0.0	49.1	54.0	-4.9	Horiz
			+0.0	+27.2	-38.2	+0.3					
			+1.0	+2.7							
6	2745.264M	48.8	+0.0	+0.0	+0.0	+0.0	+0.0	45.4	54.0	-8.6	Vert
	Ave		+0.0	+29.3	-37.8	+0.4					
			+1.4	+3.3							
^	2745.264M	53.6	+0.0	+0.0	+0.0	+0.0	+0.0	50.2	54.0	-3.8	Vert
			+0.0	+29.3	-37.8	+0.4					
			+1.4	+3.3							
8	110.541M	47.4	+0.0	+11.1	-27.8	+0.1	+0.0	32.6	43.5	-10.9	Horiz
			+1.8	+0.0	+0.0	+0.0					
			+0.0	+0.0							
9	110.592M	47.1	+0.0	+11.1	-27.8	+0.1	+0.0	32.3	43.5	-11.2	Vert
			+1.8	+0.0	+0.0	+0.0					
			+0.0	+0.0							

10	2744.787M	45.6	+0.0	+0.0	+0.0	+0.0	+0.0	42.2	54.0	-11.8	Horiz
	Ave		+0.0	+29.3	-37.8	+0.4					
			+1.4	+3.3							
^	2744.787M	51.1	+0.0	+0.0	+0.0	+0.0	+0.0	47.7	54.0	-6.3	Horiz
			+0.0	+29.3	-37.8	+0.4					
			+1.4	+3.3							
12	965.036M	29.9	+0.0	+24.3	-27.2	+0.5	+0.0	33.5	54.0	-20.5	Horiz
			+6.0	+0.0	+0.0	+0.0					
			+0.0	+0.0							

CKC Laboratories, Inc. Date: 1/25/2012 Time: 10:33:52 SmartLabs, Inc. WO#: 92705
15.249 Carrier and Spurious Emissions (902-928 MHz Transmitter) Test Distance: 3 Meters Sequence#: 2 Ext
ATTN: 0 dB

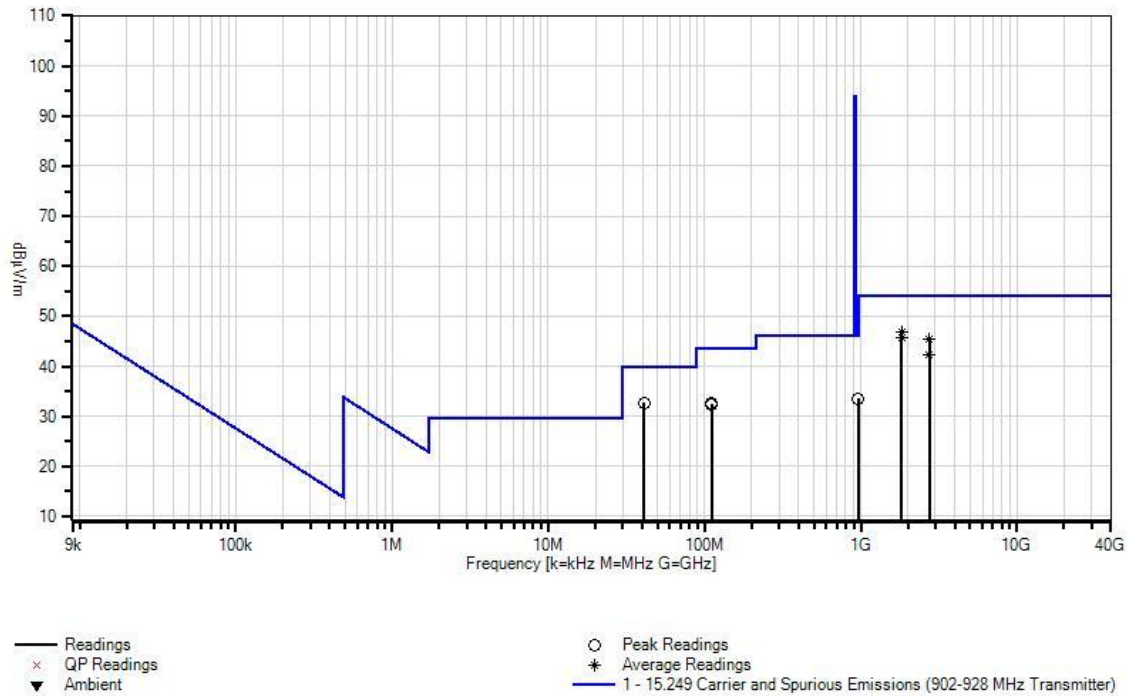

Test Setup Photos

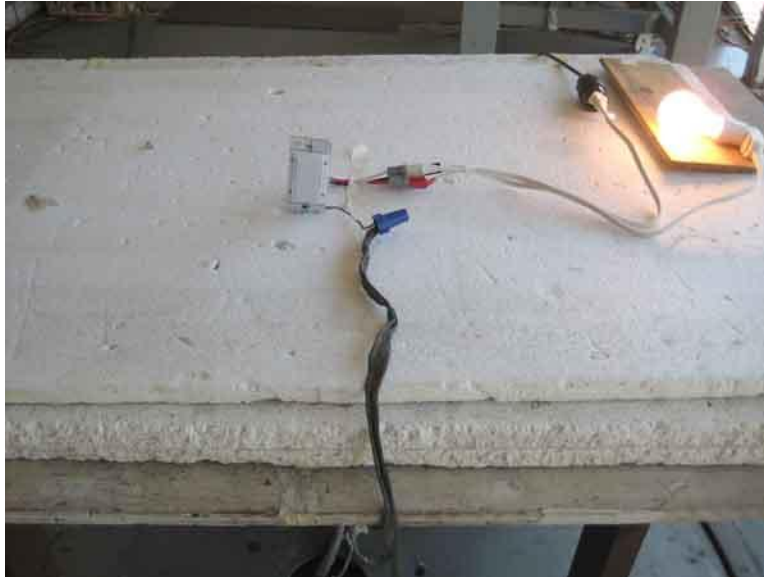

RSS-210

99 % Bandwidth

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • (714) 993-6112

Customer: **SmartLabs, Inc.**

Specification: **99% BW plot**

Work Order #: **92705**

Date: 1/25/2012

Test Type: **Maximized Emissions**

Time: 09:20:45

Equipment: **SwitchLinc™ On/Off Switch (Dual-Band)**

Sequence#: 1

Manufacturer: SmartLabs, Inc.

Tested By: E. Wong

Model: 2477S

S/N: NA

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02672	Spectrum Analyzer	E4446A	8/9/2010	8/9/2012
T1	AN01995	Biconilog Antenna	CBL6111C	3/8/2010	3/8/2012
T2	AN00309	Preamplifier	8447D	5/7/2010	5/7/2012
T3	ANP05050	Cable	RG223/U	3/21/2011	3/21/2013
T4	ANP05198	Cable	8268	12/21/2010	12/21/2012

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
SwitchLinc™ On/Off Switch (Dual-Band)*	SmartLabs, Inc.	2477S	NA

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

The EUT is placed on the wooden table lined with Styrofoam of 10cm thickness. Orientated in the intended position, the EUT is connected to a light bulb. Ground strap is connected to the EUT.


The EUT TX= 915MHz.

Frequency range of measurement = Fundamental

30 MHz-1000 MHz;RBW=120 kHz,VBW=120 kHz

Test environment conditions: 18°C, 33% relative humidity, 101kPa

Test Plot

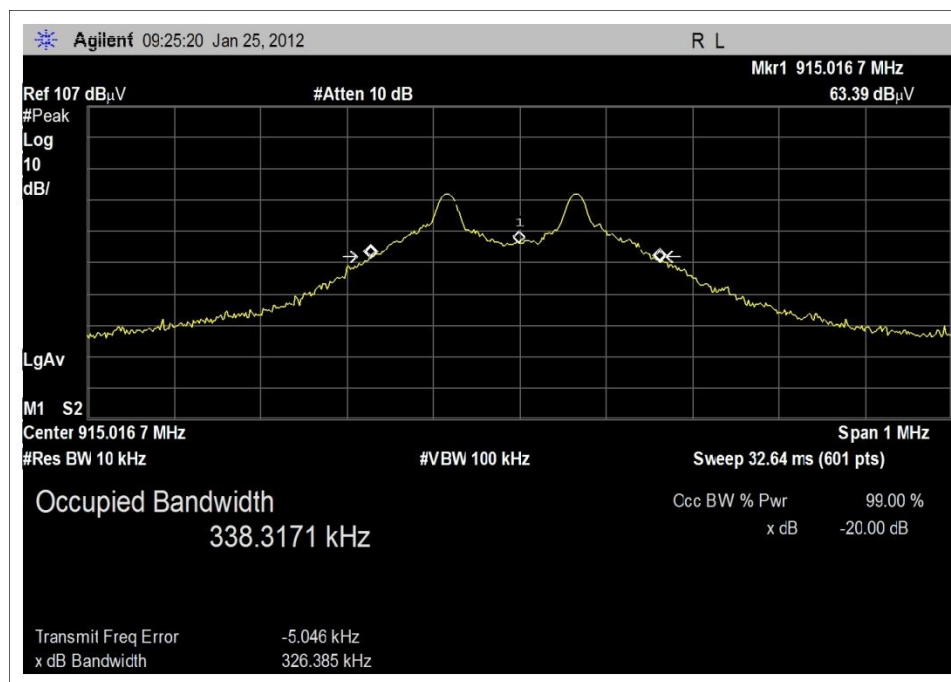

Test Setup Photos



SUPPLEMENTAL INFORMATION

Measurement Uncertainty

Uncertainty Value	Parameter
4.73 dB	Radiated Emissions
3.34 dB	Mains Conducted Emissions
3.30 dB	Disturbance Power

The reported measurement uncertainties are calculated based on the worst case of all laboratory environments from CKC Laboratories, Inc. test sites. Only those parameters which require estimation of measurement uncertainty are reported. The reported worst case measurement uncertainty is less than the maximum values derived in CISPR 16-4-2. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of $k=2$. Compliance is deemed to occur provided measurements are below the specified limits.

Emissions Test Details

TESTING PARAMETERS

Unless otherwise indicated, the following configuration parameters are used for equipment setup: The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. Cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was taken with a spectrum analyzer or receiver. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the table below. The corrected data was then compared to the applicable emission limits. Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

CORRECTION FACTORS

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in dB μ V/m, the spectrum analyzer reading in dB μ V was corrected by using the following formula. This reading was then compared to the applicable specification limit.

SAMPLE CALCULATIONS		
	Meter reading	(dB μ V)
+	Antenna Factor	(dB)
+	Cable Loss	(dB)
-	Distance Correction	(dB)
-	Preamplifier Gain	(dB)
=	Corrected Reading	(dB μ V/m)

TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. Unless otherwise specified, the following table shows the measuring equipment bandwidth settings that were used in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used.

MEASURING EQUIPMENT BANDWIDTH SETTINGS PER FREQUENCY RANGE			
TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING
CONDUCTED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz
RADIATED EMISSIONS	1000 MHz	>1 GHz	1 MHz

SPECTRUM ANALYZER/RECEIVER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in the emissions tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "positive peak" detector mode. Whenever a "quasi-peak" or "average" reading was recorded, the measurement was annotated with a "QP" or an "Ave" on the appropriate rows of the data sheets. In cases where quasi-peak or average limits were employed and data exists for multiple measurement types for the same frequency then the peak measurement was retained in the report for reference, however the numbering for the affected row was removed and an arrow or carrot ("^") was placed in the far left-hand column indicating that the row above takes precedence for comparison to the limit. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

Peak

In this mode, the spectrum analyzer or receiver recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature called "peak hold," the measurement device had the ability to measure intermittent or low duty cycle transient emission peak levels. In this mode the measuring device made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

Quasi-Peak

Quasi-peak measurements were taken using the quasi-peak detector when the true peak values exceeded or were within 2 dB of a quasi-peak specification limit. Additional QP measurements may have been taken at the discretion of the operator.

Average

Average measurements were taken using the average detector when the true peak values exceeded or were within 2 dB of an average specification limit. Additional average measurements may have been taken at the discretion of the operator. If the specification or test procedure requires trace averaging, then the averaging was performed using 100 samples or as required by the specification. All other average measurements are performed using video bandwidth averaging. To make these measurements, the test engineer reduces the video bandwidth on the measuring device until the modulation of the signal is filtered out. At this point the measuring device is set into the linear mode and the scan time is reduced.