



CERTIFICATION TEST REPORT

Report Number. : 11536164-E1V6

Applicant : SONOS INC.
614 CHAPALA STREET
SANTA BARBARA, CA 93101, U.S.A.

Model : S15

FCC ID : SBVRM013

IC : 5373A-RM013

EUT Description : 802.11 b/g/n, 3x3, HT20 device

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
INDUSTRY CANADA RSS - 247 ISSUE 1
INDUSTRY CANADA RSS-GEN ISSUE 4

Date Of Issue:
March 28, 2017

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

| <u>Rev.</u> | <u>Issue Date</u> | <u>Revisions</u> | <u>Revised By</u> |
|-------------|-------------------|--|-------------------|
| V1 | 02/27/17 | Initial Issue | D. Corona |
| V2 | 03/16/17 | Updated Section 5.2, 5.5, 5.6, Output power section updated to "chains are correlated" and PSD sections added KDB 662911 D01 | D. Corona |
| V3 | 03/21/17 | Updated Directional Gain and Output Power Section | D. Corona |
| V4 | 03/24/17 | Update antenna gain and max power table | P. Zhang |
| V5 | 03/28/17 | Update antenna gain and max power table | P. Zhang |
| V6 | 03/28/17 | Updated Section 5.5 and 11 | D. Corona |

TABLE OF CONTENTS

| | |
|--|-----------|
| 1. ATTESTATION OF TEST RESULTS | 5 |
| 2. TEST METHODOLOGY | 6 |
| 3. FACILITIES AND ACCREDITATION | 6 |
| 4. CALIBRATION AND UNCERTAINTY | 6 |
| 4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> | 6 |
| 4.2. <i>SAMPLE CALCULATION</i> | 6 |
| 4.3. <i>MEASUREMENT UNCERTAINTY</i> | 7 |
| 5. EQUIPMENT UNDER TEST | 8 |
| 5.1. <i>DESCRIPTION OF EUT</i> | 8 |
| 5.2. <i>MAXIMUM OUTPUT POWER</i> | 8 |
| 5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> | 8 |
| 5.4. <i>SOFTWARE AND FIRMWARE</i> | 8 |
| 5.5. <i>WORST-CASE CONFIGURATION AND MODE</i> | 8 |
| 5.6. <i>DESCRIPTION OF TEST SETUP</i> | 9 |
| 6. TEST AND MEASUREMENT EQUIPMENT | 11 |
| 7. MEASUREMENT METHODS | 12 |
| 8. SUMMARY TABLE | 13 |
| 9. ON TIME AND DUTY CYCLE MEASUREMENTS | 14 |
| 10. ANTENNA PORT TEST RESULTS | 17 |
| 10.1. <i>11b 3TX CDD MIMO MODE IN THE 2.4GHz BAND</i> | 17 |
| 10.1.1. 6 dB BANDWIDTH..... | 17 |
| 10.1.2. 99% BANDWIDTH..... | 23 |
| 10.1.3. OUTPUT POWER | 29 |
| 10.1.4. POWER SPECTRAL DENSITY..... | 31 |
| 10.1.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS | 37 |
| 10.2. <i>11g 3TX CDD MIMO MODE IN THE 2.4GHz BAND</i> | 46 |
| 10.2.1. 6 dB BANDWIDTH..... | 46 |
| 10.2.2. 99% BANDWIDTH..... | 52 |
| 10.2.3. OUTPUT POWER | 58 |
| 10.2.4. POWER SPECTRAL DENSITY..... | 60 |
| 10.2.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS | 66 |
| 10.3. <i>11n HT20 3TX CDD MIMO MODE IN THE 2.4GHz BAND</i> | 75 |
| 10.3.1. 6 dB BANDWIDTH..... | 75 |
| 10.3.2. 99% BANDWIDTH..... | 81 |
| 10.3.3. OUTPUT POWER | 87 |
| 10.3.4. POWER SPECTRAL DENSITY..... | 89 |

| | | |
|------------|---|------------|
| 10.3.5. | CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS | 95 |
| 11. | RADIATED TEST RESULTS..... | 104 |
| 11.1. | LIMITS AND PROCEDURE..... | 104 |
| 11.2. | TRANSMITTER ABOVE 1 GHz..... | 105 |
| 11.2.1. | 11b 3TX CDD MIMO MODE IN THE 2.4GHz BAND | 105 |
| 11.2.2. | 11g 3TX CDD MIMO MODE IN THE 2.4GHz BAND | 115 |
| 11.2.3. | 11n HT20 3TX CDD MIMO MODE IN THE 2.4GHz BAND | 125 |
| 11.3. | WORST-CASE BELOW 30 GHz | 135 |
| 11.4. | WORST-CASE BELOW 1 GHz | 137 |
| 11.1. | WORST-CASE 18 to 26 GHz | 139 |
| 12. | AC POWER LINE CONDUCTED EMISSIONS | 141 |
| 12.1. | EUT IS POWERED BY LINE CORD CONNECTED TO AC MAINS | 142 |
| 13. | SETUP PHOTOS | 146 |
| 14. | ART Power setting table based on Radiated Bandedge measurements: | 148 |

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SONOS INC.
EUT DESCRIPTION: 802.11 b/g/n, 3x3, HT20 device
MODEL: S15
SERIAL NUMBER: 1612 94-9F-3E-B0-00-D0-4 (Conducted + Radiated)
DATE TESTED: January 9 – 12, 2017

| APPLICABLE STANDARDS | |
|---------------------------------|--------------|
| STANDARD | TEST RESULTS |
| CFR 47 Part 15 Subpart C | Pass |
| INDUSTRY CANADA RSS-247 Issue 1 | Pass |
| INDUSTRY CANADA RSS-GEN Issue 4 | Pass |

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Tested By:



DAN CORONIA
CONSUMER TECHNOLOGY DIVISION
WISE PROJECT LEAD
UL VERIFICATION SERVICES INC

JONATHAN HSU
CONSUMER TECHNOLOGY DIVISION
WISE LAB ENGINEER
UL VERIFICATION SERVICES INC

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, KDB 558074 D01 v03r05, KDB 662911 D01 Multiple Transmitter Output v02r01, ANSI C63.10-2013, RSS-GEN Issue 4, and RSS-247 Issue 1.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

| 47173 Benicia Street | | 47266 Benicia Street | |
|-------------------------------------|------------------------|--------------------------|------------------------|
| <input checked="" type="checkbox"/> | Chamber A (IC:2324B-1) | <input type="checkbox"/> | Chamber D (IC:2324B-4) |
| <input type="checkbox"/> | Chamber B (IC:2324B-2) | <input type="checkbox"/> | Chamber E (IC:2324B-5) |
| <input type="checkbox"/> | Chamber C (IC:2324B-3) | <input type="checkbox"/> | Chamber F (IC:2324B-6) |
| | | <input type="checkbox"/> | Chamber G (IC:2324B-7) |
| | | <input type="checkbox"/> | Chamber H (IC:2324B-8) |

The above test sites and facilities are covered under FCC Test Firm Registration # 208313.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| Parameter | Uncertainty |
|---|-------------|
| Worst Case Conducted Disturbance, 9KHz to 0.15 MHz | 3.84 dB |
| Worst Case Conducted Disturbance, 0.15 to 30 MHz | 3.65 dB |
| Worst Case Radiated Disturbance, 9KHz to 30 MHz | 3.15 dB |
| Worst Case Radiated Disturbance, 30 to 1000 MHz | 5.36 dB |
| Worst Case Radiated Disturbance, 1000 to 18000 MHz | 4.32 dB |
| Worst Case Radiated Disturbance, 18000 to 26000 MHz | 4.45 dB |
| Worst Case Radiated Disturbance, 26000 to 40000 MHz | 5.24 dB |

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an 802.11 b/g/n, 3x3, HT20 device.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

| Frequency Range (MHz) | Mode | Measured Output Power (dBm) | Measured Output Power (mW) |
|--------------------------|----------------------|-----------------------------------|----------------------------------|
| 2412 - 2462 | 802.11b 3TX CDD | 24.74 | 297.85 |
| 2412 - 2462 | 802.11g 3TX CDD | 23.76 | 237.68 |
| 2412 - 2462 | 802.11n HT20 3TX CDD | 23.81 | 240.44 |

The transmitter has a maximum EIRP output power as follows:

| Frequency Range (MHz) | Mode | EIRP Power (dBm) | EIRP Power (mW) |
|--------------------------|----------------------|---------------------|--------------------|
| 2412 - 2462 | 802.11b 3TX CDD | 29.04 | 801.68 |
| 2412 - 2462 | 802.11g 3TX CDD | 28.06 | 639.73 |
| 2412 - 2462 | 802.11n HT20 3TX CDD | 28.11 | 647.14 |

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The EUT utilizes wire monopole antennas on FR4 substrate with maximum gain as table below:

| Frequency Band (GHz) | Antenna Gain (dBi) | | |
|-------------------------|--------------------|---------|---------|
| | Chain 0 | Chain 1 | Chain 2 |
| 2.4 GHz | 4.30 | 3.50 | 1.60 |

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was Atheros Radio Test 2 (ART2-GUI)

5.5. WORST-CASE CONFIGURATION AND MODE

Radiated bandedge, harmonics, and spurious emissions from 1 GHz to 18GHz were performed. The EUT was set to transmit at the Low/Middle/High channels with designed (target) output powers.

Radiated emission below 1GHz, above 18GHz, and power line conducted emission were performed with the EUT was set to transmit at the channel with highest output power as worst-case scenario.

The EUT can only be setup in desktop orientation; therefore, all radiated testing was performed with the EUT in desktop orientation.

Worst-case data rates as provided by the client were:

All final tests in the 802.11b mode were made at 11 Mb/s.

All final tests in the 802.11g mode were made at 24 Mb/s.

All final tests in the 802.11n HT20 mode were made at MCS0.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

| Support Equipment List | | | | |
|------------------------|--------------|---------|------------------------|--------|
| Description | Manufacturer | Model | Serial Number | FCC ID |
| Laptop | Lenovo | X201 | R9-3V9&R | NA |
| AC/DC Adapter | Lenovo | 92P1156 | 11S92P1156Z1ZDXN81NG1W | NA |


I/O CABLES (CONDUCTED & RADIATED TEST)

| I/O Cable List | | | | | | |
|----------------|----------|----------------------|----------------|------------|------------------|---------------------------|
| Cable No | Port | # of identical ports | Connector Type | Cable Type | Cable Length (m) | Remarks |
| 1 | AC Power | 1 | AC | Unshielded | 1 | AC Mains to AC/DC Adapter |
| 2 | DC Power | 1 | DC | Shielded | 1.2 | AC/DC Adapter to Laptop |
| 3 | Ethernet | 1 | RJ45 | Unshielded | 1.5 | Laptop to EUT |
| 4 | AC Power | 1 | AC | Unshielded | 1.2 | AC Mains to EUT |

TEST SETUP

The EUT was connected to a host Laptop via Ethernet cable. Test software exercised the EUT.

SETUP DIAGRAM

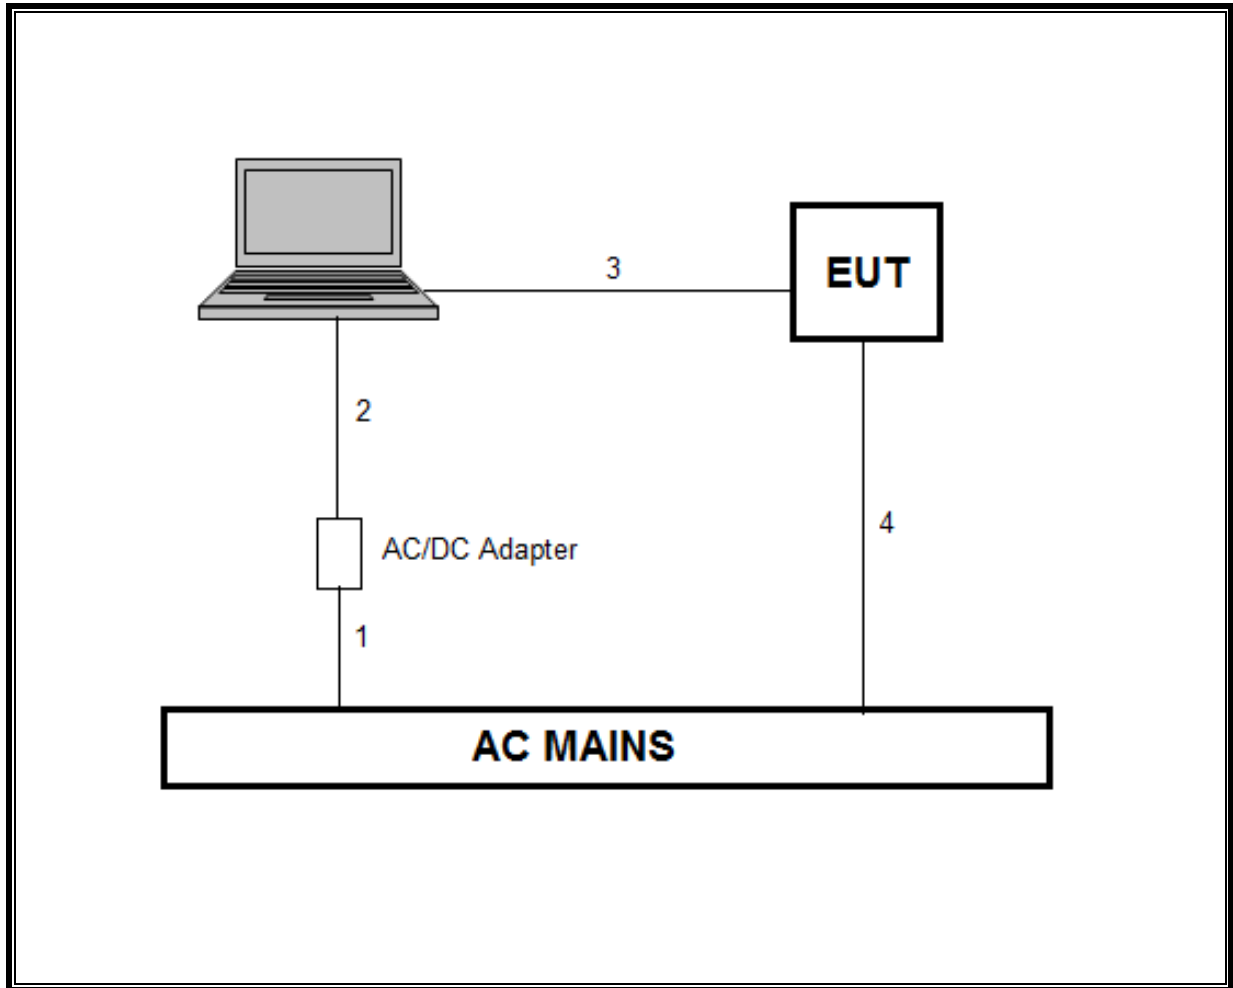

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| Test Equipment List | | | | | |
|---|-----------------|-------------------------|----------|------------|------------|
| Description | Manufacturer | Model | T Number | Cal Date | Cal Due |
| Amplifier, 1 to 18GHz | Miteq | AFS42-00101800-25-S-42 | 1165 | 8/01/2016 | 8/01/2017 |
| Amplifier, 1 to 8 GHz | Miteq | AMF-4D-01000800-30-29P | 1170 | 4/28/2016 | 4/28/2017 |
| Pre-Amp 1-26.5GHz | Agilent | 8449B | 404 | 7/05/2016 | 7/05/2017 |
| Amplifier, 10KHz to 1GHz, 32dB | Sonoma | 310 | 300 | 11/10/2016 | 11/10/2017 |
| Antenna, Broadband Hybrid 30MHz to 2000MHz | Sunol Sciences | JB3 | 899 | 5/26/2016 | 5/26/2017 |
| Antenna, Horn 1-18GHz | ETS Lindgren | 3117 | 346 | 2/22/2016 | 2/22/2017 |
| 18 - 26.5 GHz Horn Antenna | Seavey Division | MWH-1826/B | 449 | 5/26/2016 | 5/26/2017 |
| Spectrum Analyzer, PXA, 3Hz to 44GHz | Agilent | N9030A | 908 | 4/13/2016 | 4/13/2017 |
| Antenna, Broadband Hybrid, 30MHz to 2000MHz | Sunol Sciences | JB1 | 130 | 9/29/2016 | 9/29/2017 |
| Loop Antenna | EMCO | 6502 | 35 | 3/24/2016 | 3/24/2017 |
| PSA Series Spectrum Analyzer, 3Hz - 44GHz | Agilent | E4446A | 146 | 7/13/2016 | 7/13/2017 |
| P-Series Power Meter | Agilent | N1911A | 229 | 7/28/2016 | 7/28/2017 |
| Wideband Power Sensor 50MHz - 18GHz | Agilent | N1921A | 750 | 10/17/2016 | 10/17/2017 |
| EMI Receiver | Rohde & Schwarz | ESR-EMI | 1436 | 12/19/2016 | 12/19/2017 |
| LISN | FISCHER | FCC-LISN-50/250-25-2-01 | 1310 | 6/08/2016 | 06/08/2017 |

NOTE: *testing is completed before equipment calibration expiration date.

| Test Software List | | | |
|-----------------------|--------------|--------|------------------------|
| Description | Manufacturer | Model | Version |
| Radiated Software | UL | UL EMC | Ver 9.5, June 24, 2015 |
| Antenna Port Software | UL | UL RF | Ver 5.8, Dec 07, 2016 |

7. MEASUREMENT METHODS

On Time and Duty Cycle: KDB 558074 D01 v03r05, Section 6.

6 dB BW: KDB 558074 D01 v03r05, Section 8.1.

99% BW: ANSI C63.10-2013, Section 6.9.3.

Output Power: KDB 558074 D01 v03r05, Section 9.2.3.2.

Power Spectral Density: KDB 558074 D01 v03r05, Section 10.3.

Out-of-band emissions in non-restricted bands: KDB 558074 D01 v03r05, Section 11.1 (b).

Out-of-band emissions in restricted bands: KDB 558074 D01 v03r05, Section 12.1.

Band-edge: KDB 558074 D01 v03r05, Section 12.1.

AC Power Line Conducted Emissions: ANSI C63.10-2013, Section 6.2.

8. SUMMARY TABLE

| FCC Part Section | RSS Section(s) | Test Description | Test Limit | Test Condition | Test Result |
|---------------------------|----------------|---|------------|----------------|-------------|
| 15.247 (a)(2) | RSS-247 5.2.1 | Occupied Band width (6dB) | >500KHz | Conducted | Pass |
| 2.1051, 15.247 (d) | RSS-247 5.5 | Band Edge / Conducted Spurious Emission | -30dBc | | Pass |
| 15.247 | RSS-247 5.4.4 | TX conducted output power | <30dBm | | Pass |
| 15.247 | RSS-247 5.2.2 | PSD | <8dBm | | Pass |
| 15.207 (a) | RSS-GEN 8.8 | AC Power Line conducted emissions | Section 10 | Radiated | Pass |
| 15.205, 15.209, 15.247(d) | RSS-GEN 8.9/7 | Radiated Spurious Emission | < 54dBuV/m | | Pass |

9. ON TIME AND DUTY CYCLE MEASUREMENTS

ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.



PROCEDURE


KDB 558074 Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

| Mode | ON Time B (msec) | Period (msec) | Duty Cycle x (linear) | Duty Cycle (%) | Duty Cycle Correction Factor (dB) | 1/B Minimum VBW (khz) |
|---------------------|------------------|---------------|-----------------------|----------------|-----------------------------------|-----------------------|
| 11b 2.4GHz CDD | 1.281 | 1.326 | 0.966 | 97.0 | 0.150 | 0.78 |
| 11g 2.4GHz CDD | 0.523 | 0.574 | 0.911 | 91.0 | 0.404 | 1.912 |
| 11n HT20 2.4GHz CDD | 1.887 | 1.938 | 0.973 | 97.0 | 0.115 | 0.529 |

DUTY CYCLE PLOTS

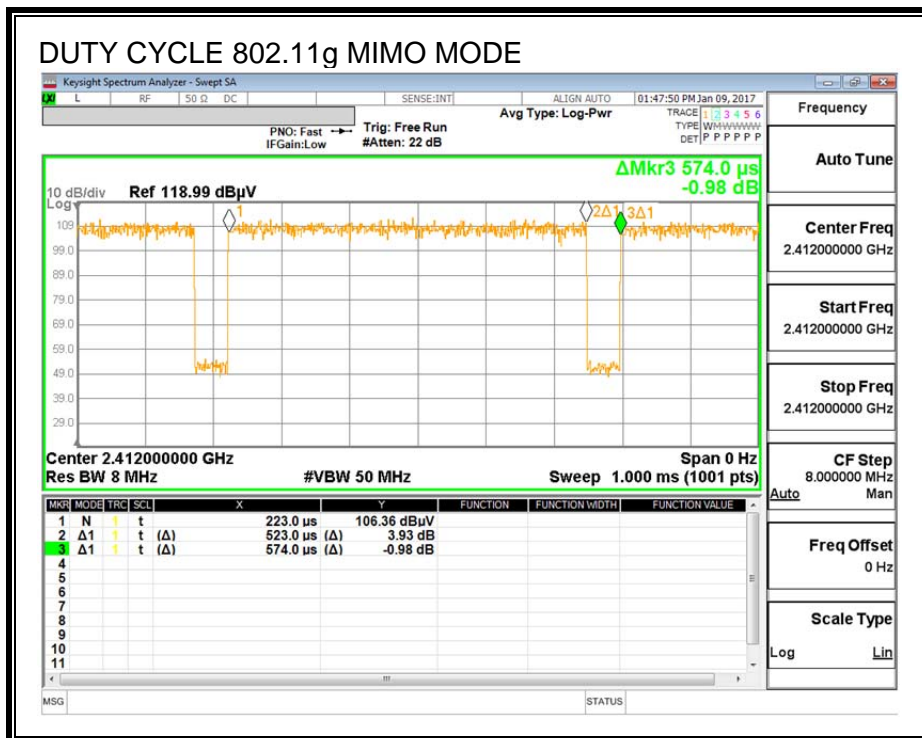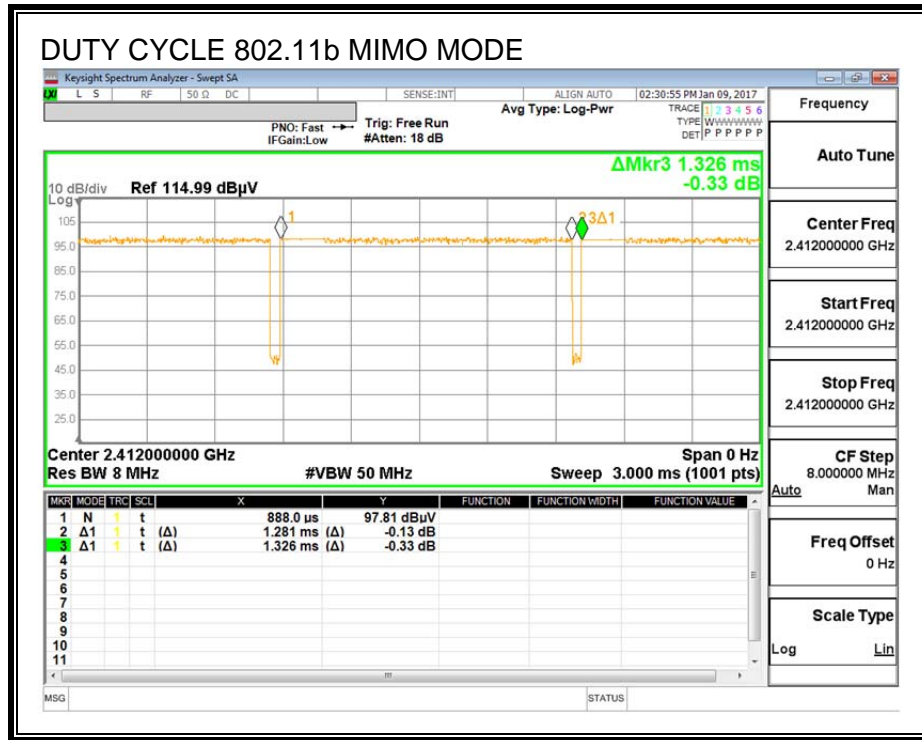

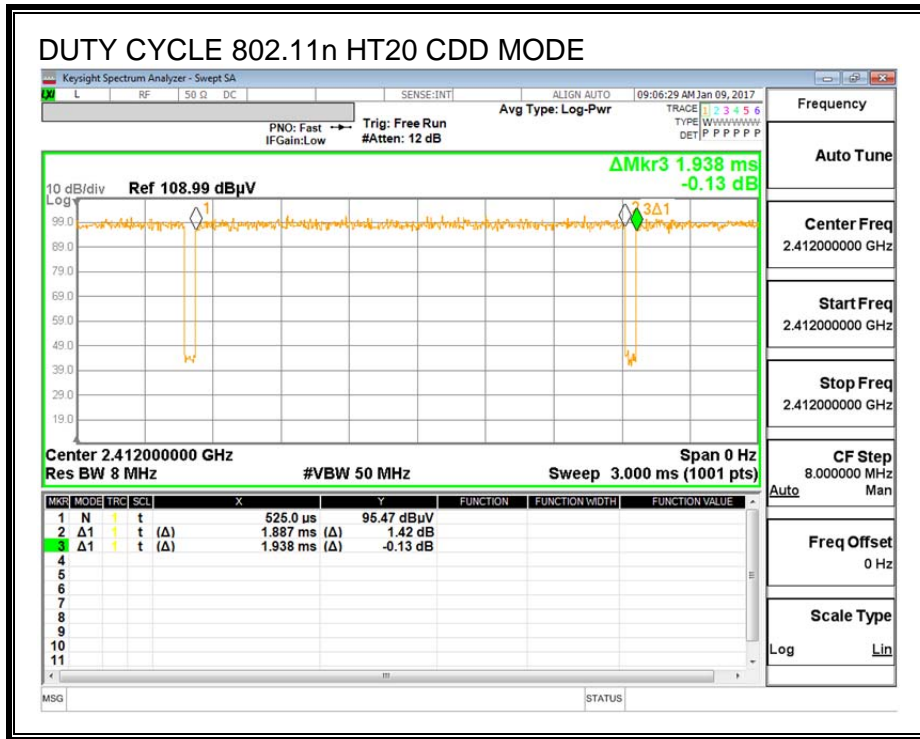

10. ANTENNA PORT TEST RESULTS

10.1. 11b 3TX CDD MIMO MODE IN THE 2.4GHz BAND

10.1.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-247 (5.2) (1)



The minimum 6 dB bandwidth shall be at least 500 kHz.



TEST PROCEDURE



KDB 58074 D01 v03r05 Section 8.1



RESULTS


| Channel | Frequency (MHz) | 6 dB BW Chain 0 (MHz) | 6 dB BW Chain 1 (MHz) | 6 dB BW Chain 2 (MHz) | Minimum Limit (MHz) |
|----------|-----------------|-----------------------|-----------------------|-----------------------|---------------------|
| Low_1 | 2412 | 10.185 | 9.375 | 9.365 | 0.5 |
| Middle_6 | 2437 | 9.440 | 10.095 | 9.020 | 0.5 |
| High_11 | 2462 | 9.060 | 9.370 | 9.430 | 0.5 |

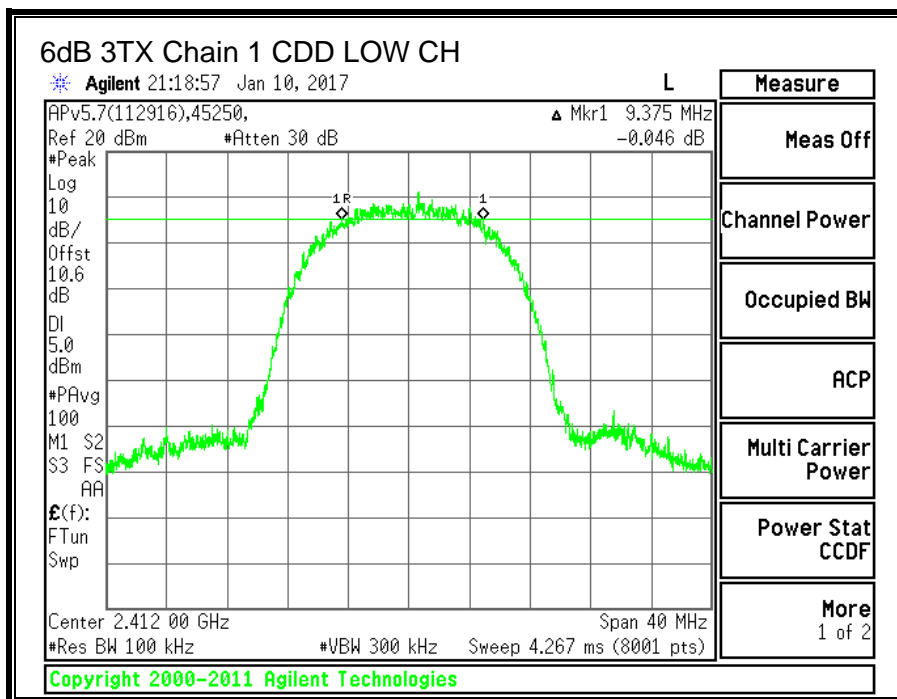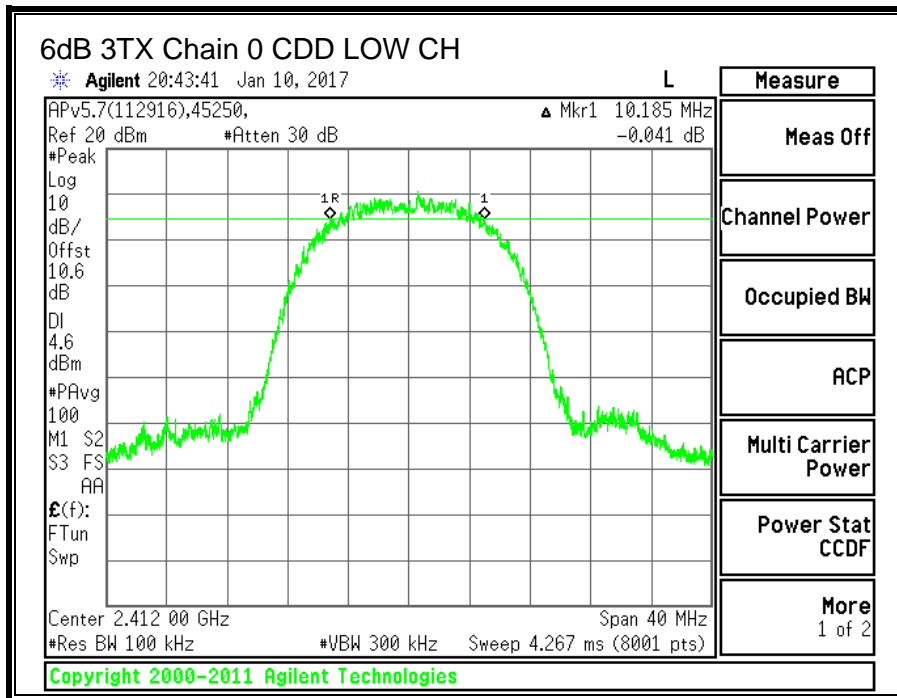

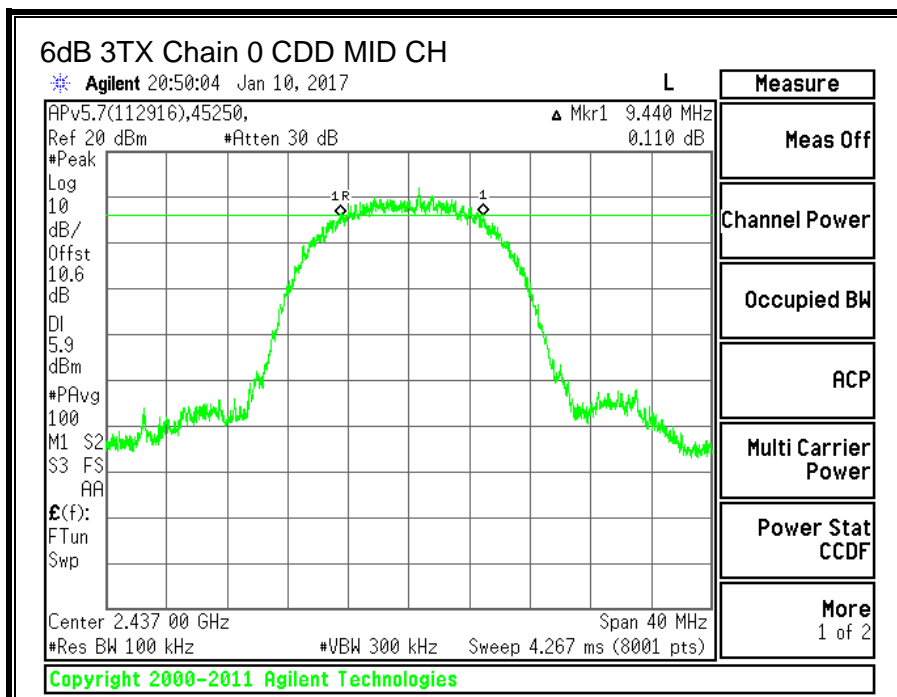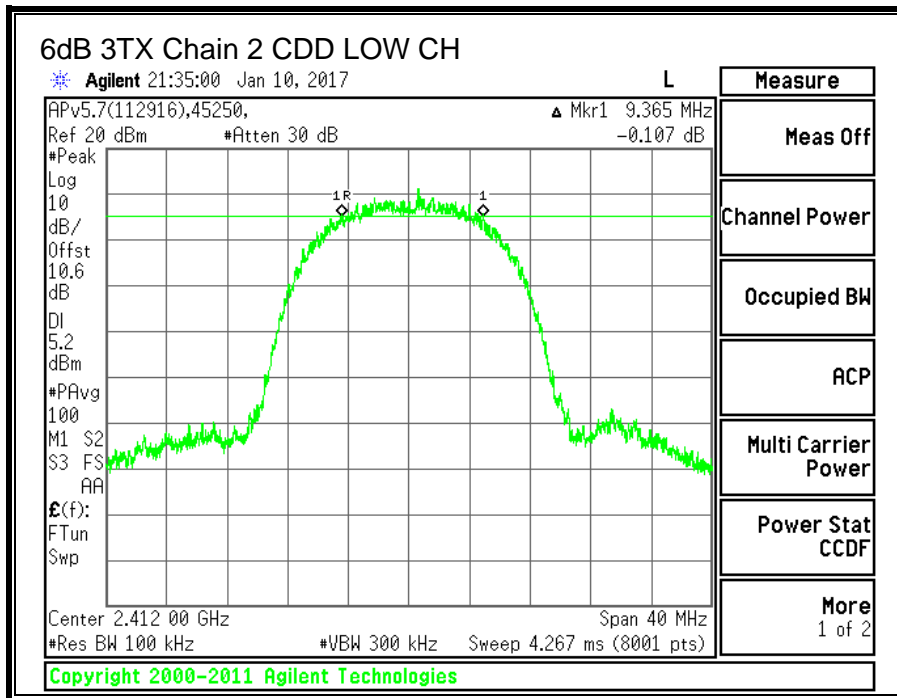

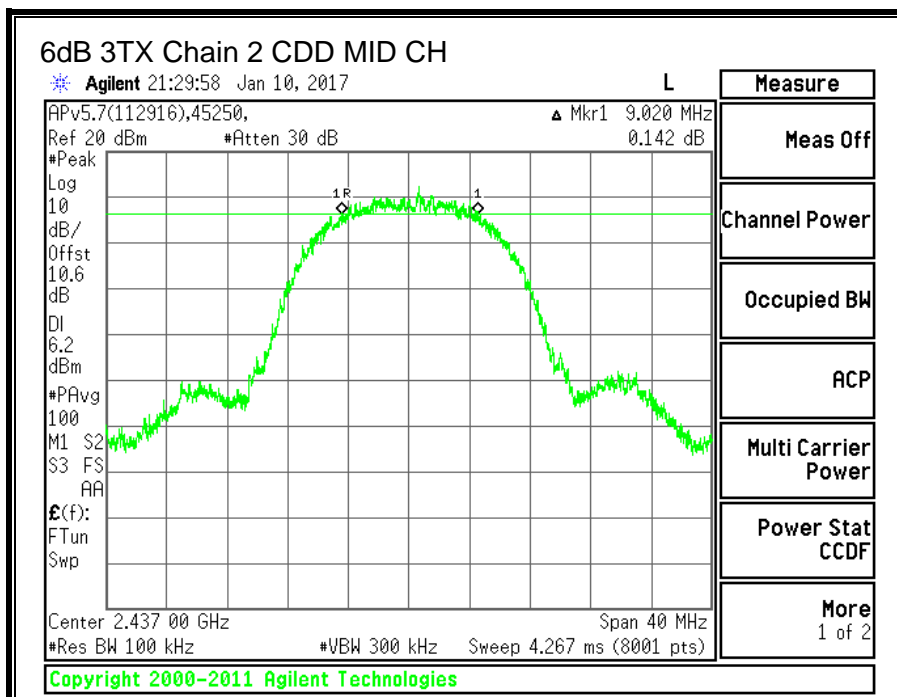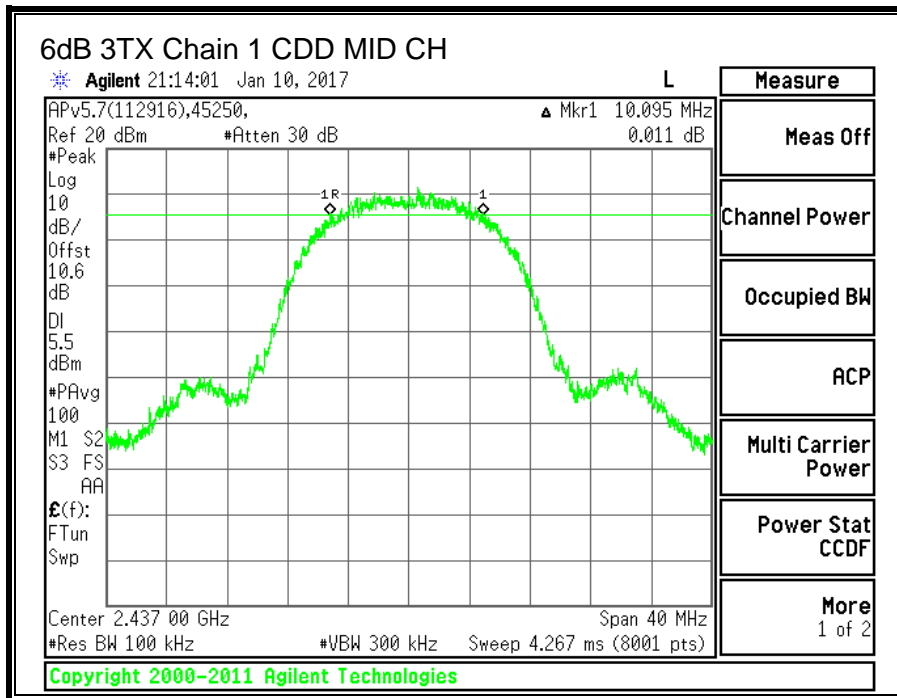

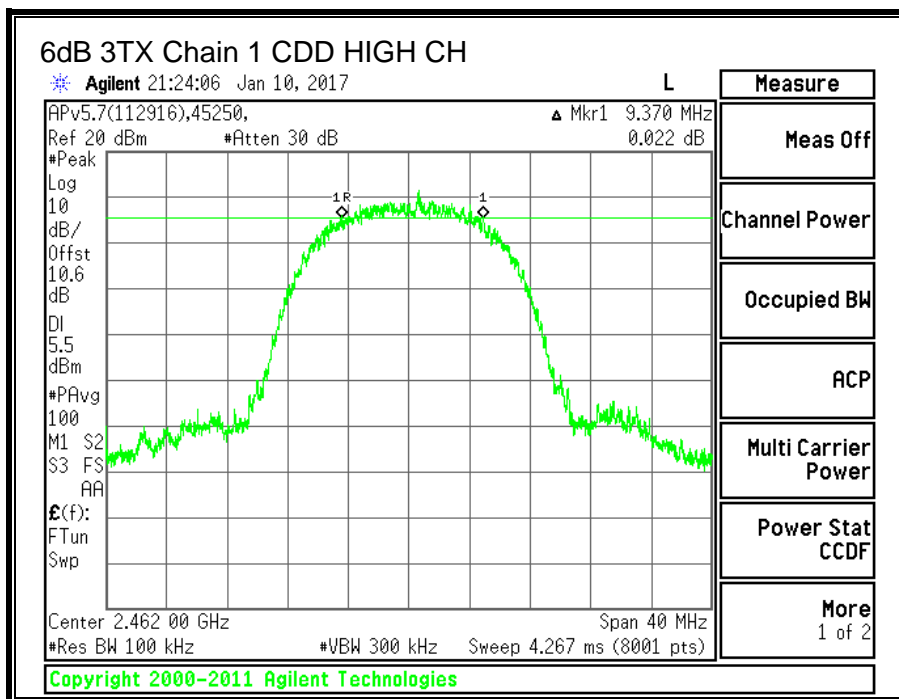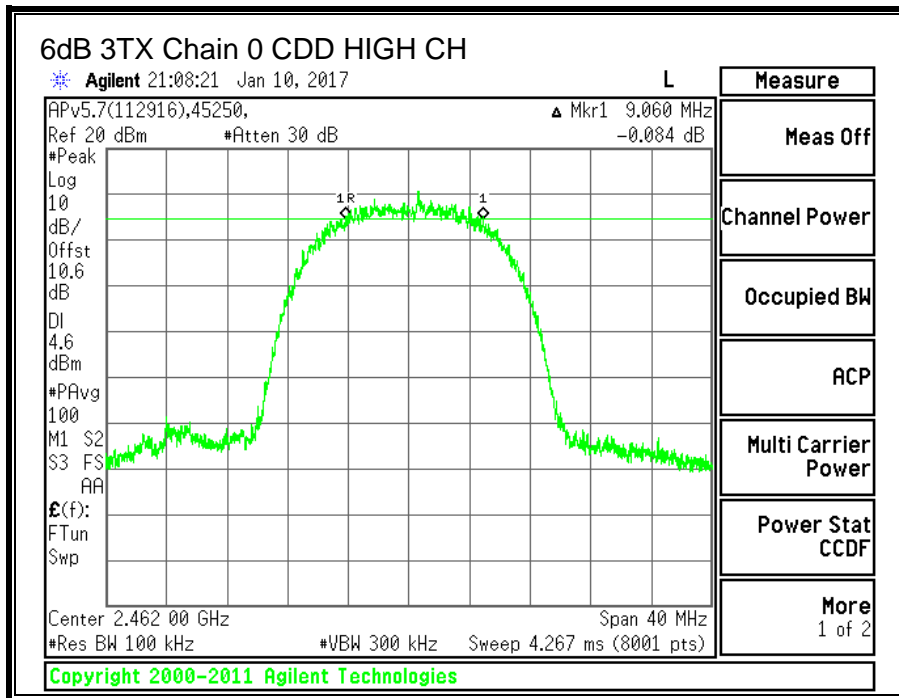

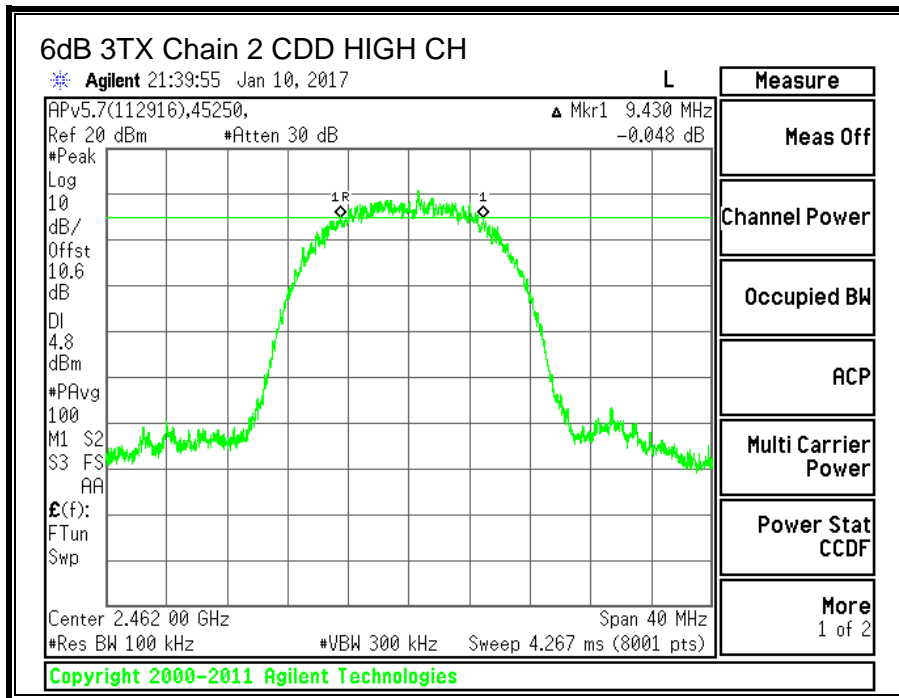

10.1.2. 99% BANDWIDTH

LIMITS



None; for reporting purposes only.



TEST PROCEDURE



ANSI C63.10: 2013 Section 6.9.3



RESULTS


| Channel | Frequency (MHz) | 99% Bandwidth Chain 0 (MHz) | 99% Bandwidth Chain 1 (MHz) | 99% Bandwidth Chain 2 (MHz) |
|----------|-----------------|-----------------------------|-----------------------------|-----------------------------|
| Low_1 | 2412 | 13.8038 | 13.7287 | 13.8466 |
| Middle_6 | 2437 | 13.8576 | 13.9113 | 13.8464 |
| High_11 | 2462 | 13.7553 | 13.7690 | 13.7547 |

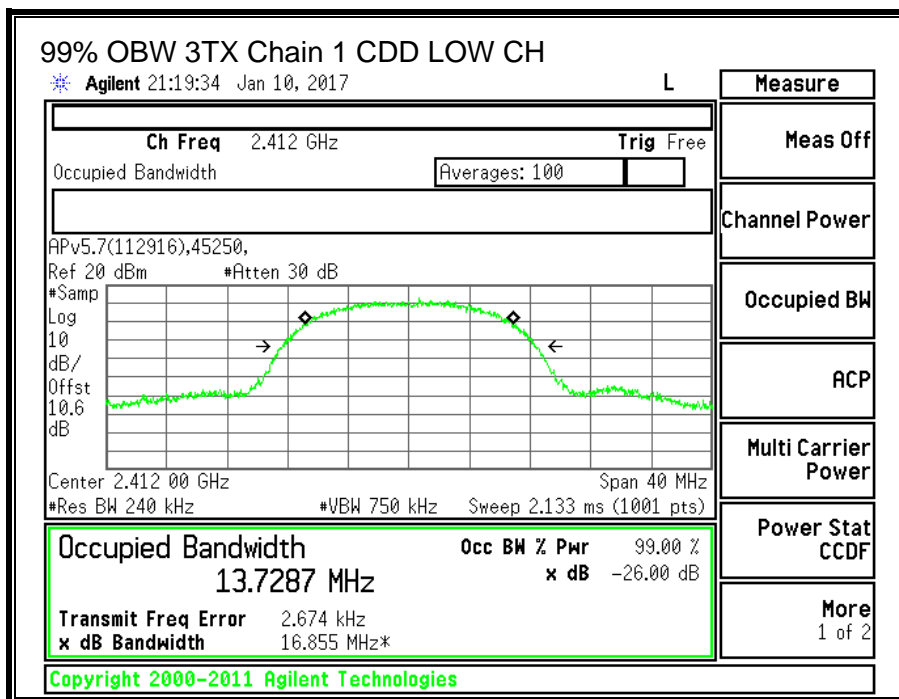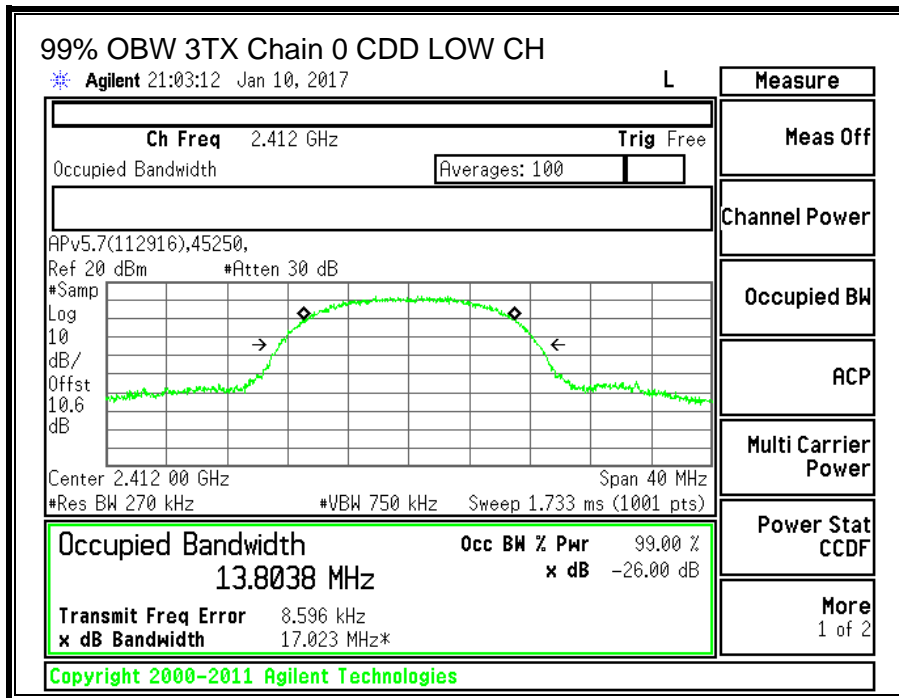

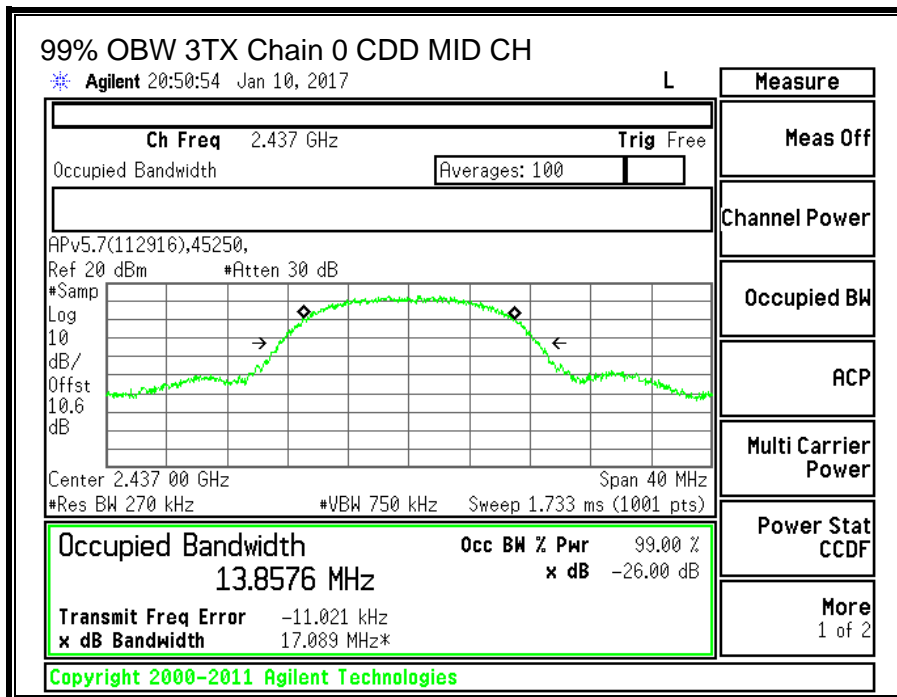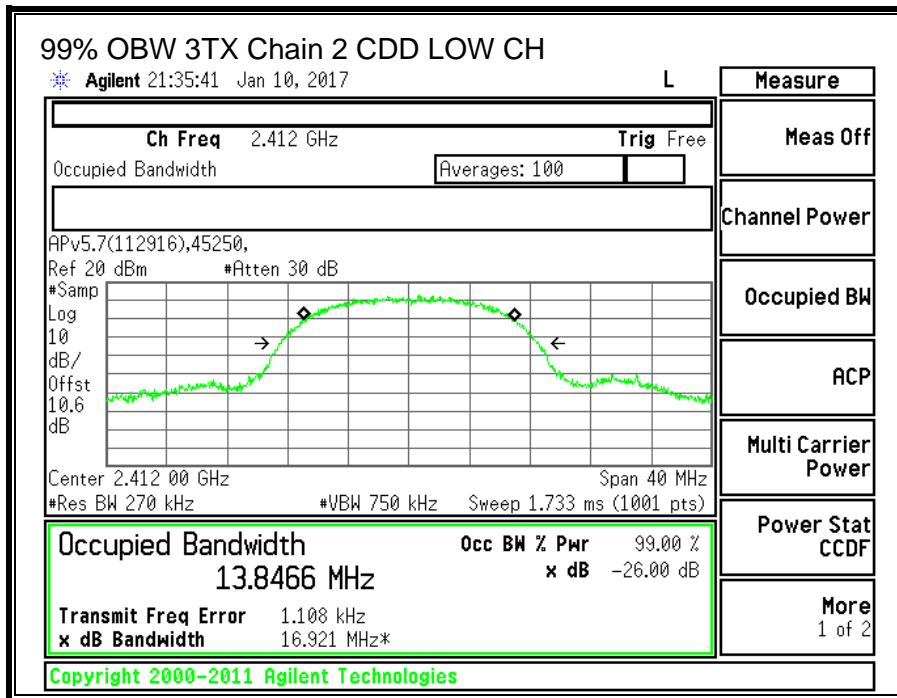

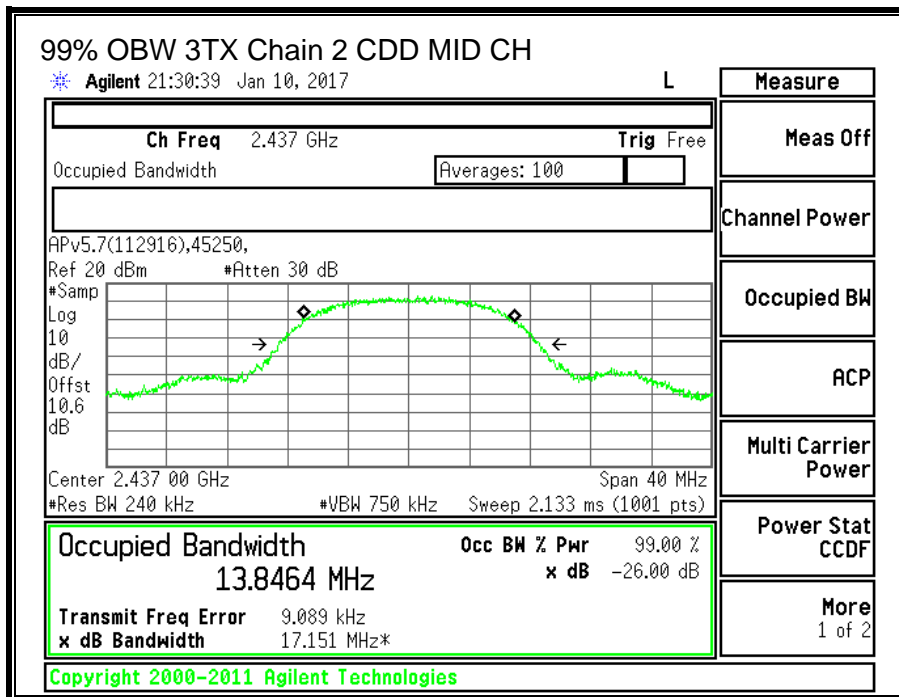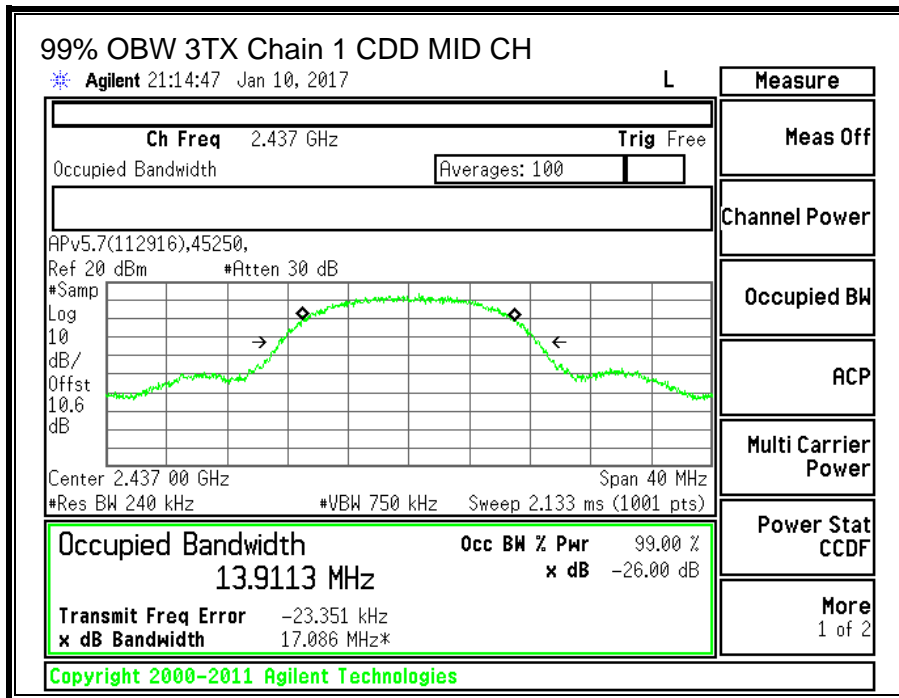

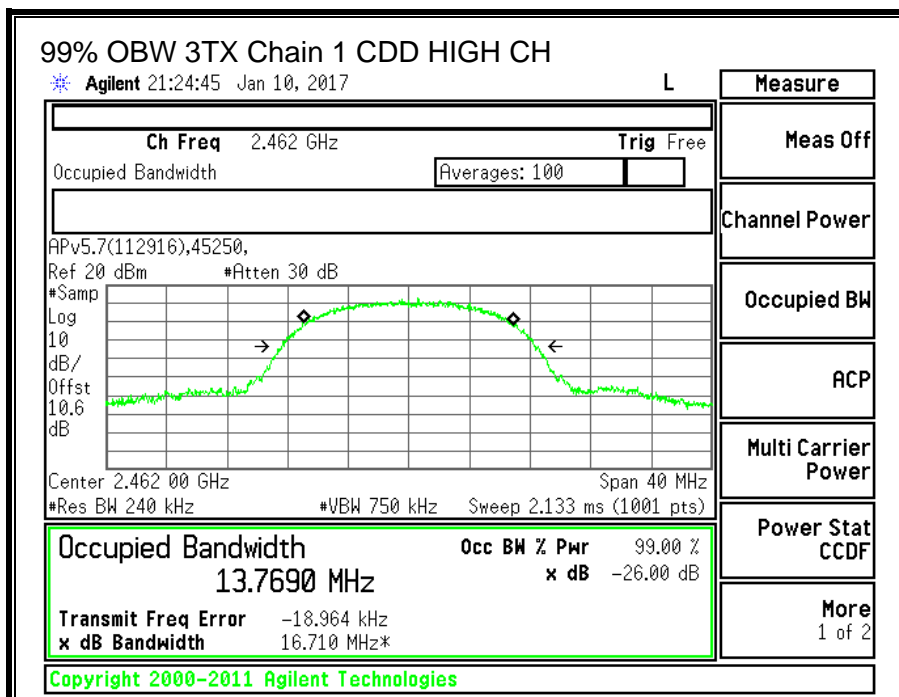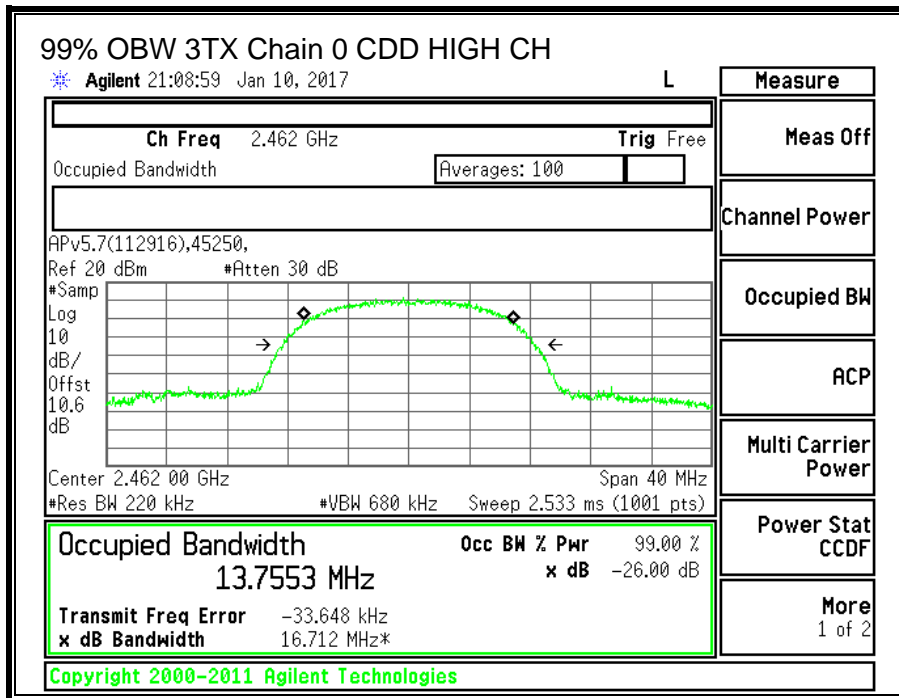

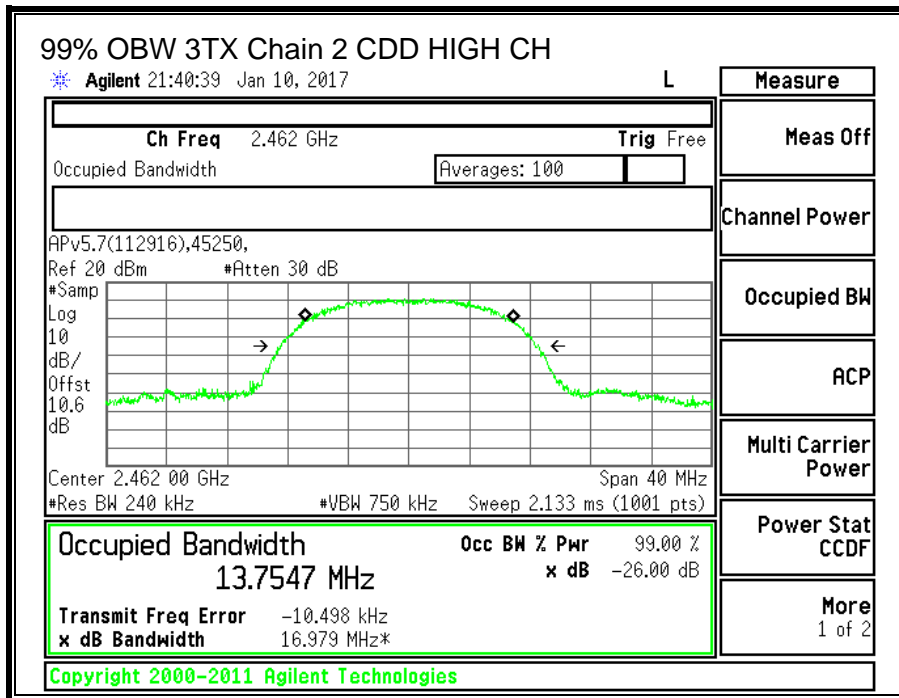

10.1.3. OUTPUT POWER

LIMITS

FCC §15.247

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

Each transmit antenna is driven by only one spatial stream

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

| Chain 0 Gain (dBi) | Chain 1 Gain (dBi) | Chain 2 Gain (dBi) | Correlated Chains Directional Gain (dBi) |
|-----------------------|-----------------------|-----------------------|---|
| 4.3 | 3.5 | 1.6 | 4.3 |

Directional Antenna Gain Calculation: KDB 662911 D01 Section F) 2) f) (ii)

Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain

TEST PROCEDURE

KDB 58074 D01 v03r05 Section 9.2.3.2

RESULTS

| | | | |
|------------|-------|--------------|------------|
| ID: | 45250 | Date: | 01/10/2017 |
|------------|-------|--------------|------------|

Limits

| Channel | Frequency (MHz) | Directional Gain (dBi) | FCC Power Limit (dBm) | IC Power Limit (dBm) | IC EIRP Limit (dBm) | Max Power (dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low | 2412 | 4.30 | 30.00 | 30 | 36 | 30.00 |
| Mid | 2437 | 4.30 | 30.00 | 30 | 36 | 30.00 |
| High | 2462 | 4.30 | 30.00 | 30 | 36 | 30.00 |

Results

| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Chain 1 Meas Power (dBm) | Chain 2 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|----------------|
| Low | 2412 | 18.92 | 18.70 | 18.82 | 23.59 | 30.00 | -6.41 |
| Mid | 2437 | 19.94 | 20.02 | 19.95 | 24.74 | 30.00 | -5.26 |
| High | 2462 | 18.75 | 19.02 | 18.74 | 23.61 | 30.00 | -6.39 |

Note: the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

10.1.4. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.



TEST PROCEDURE



KDB 58074 D01 v03r05 Section 10.3



RESULTS



| Duty Cycle CF (dB) | | 0.149 | Included in Calculations of Corr'd PSD | | | | |
|--------------------|-----------------|--------------------|--|--------------------|------------------------|-------------|-------------|
| PSD Results | | | | | | | |
| Channel | Frequency (MHz) | Chain 0 Meas (dBm) | Chain 1 Meas (dBm) | Chain 2 Meas (dBm) | Total Corr'd PSD (dBm) | Limit (dBm) | Margin (dB) |
| Low | 2412 | -3.12 | -3.35 | -2.93 | 1.79 | 8.0 | -6.2 |
| Mid | 2437 | -2.66 | -2.81 | -2.66 | 2.21 | 8.0 | -5.8 |
| High | 2462 | -4.05 | -3.57 | -3.57 | 1.19 | 8.0 | -6.8 |


Correlated PSD Calculation Method: KDB 662911 D01 Section E) 2) c)

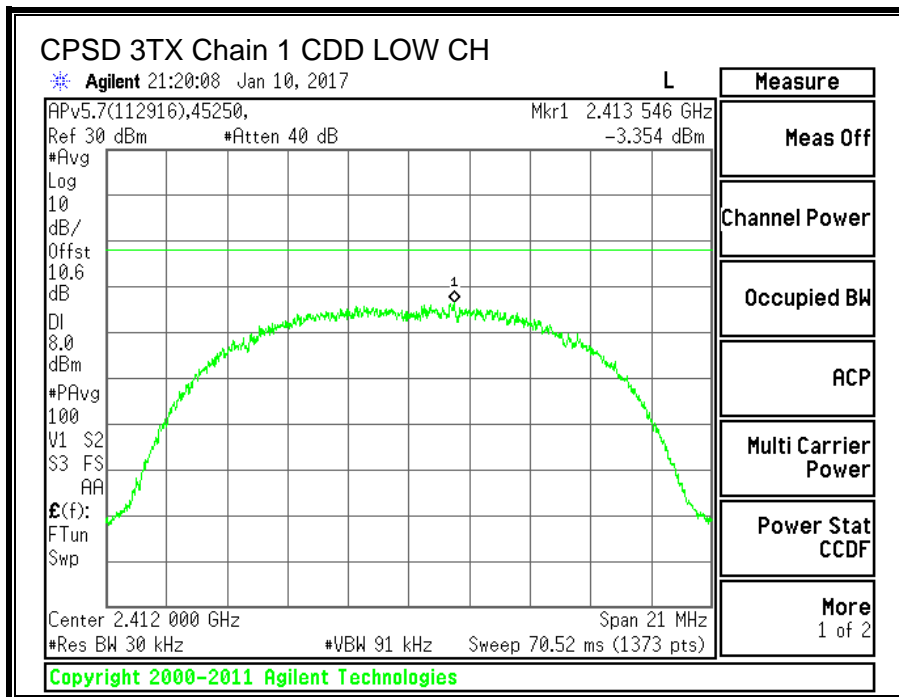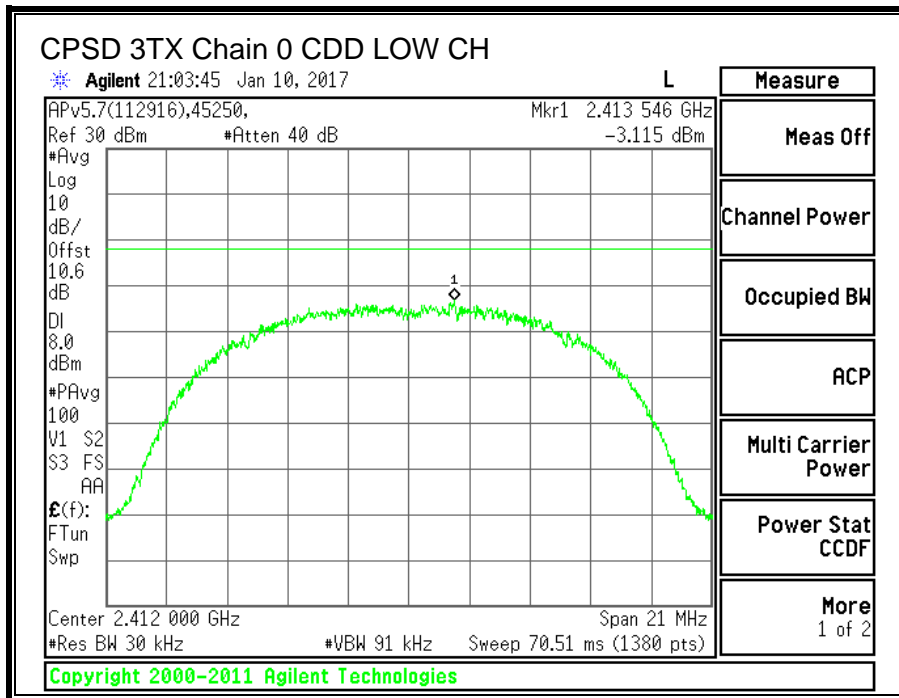

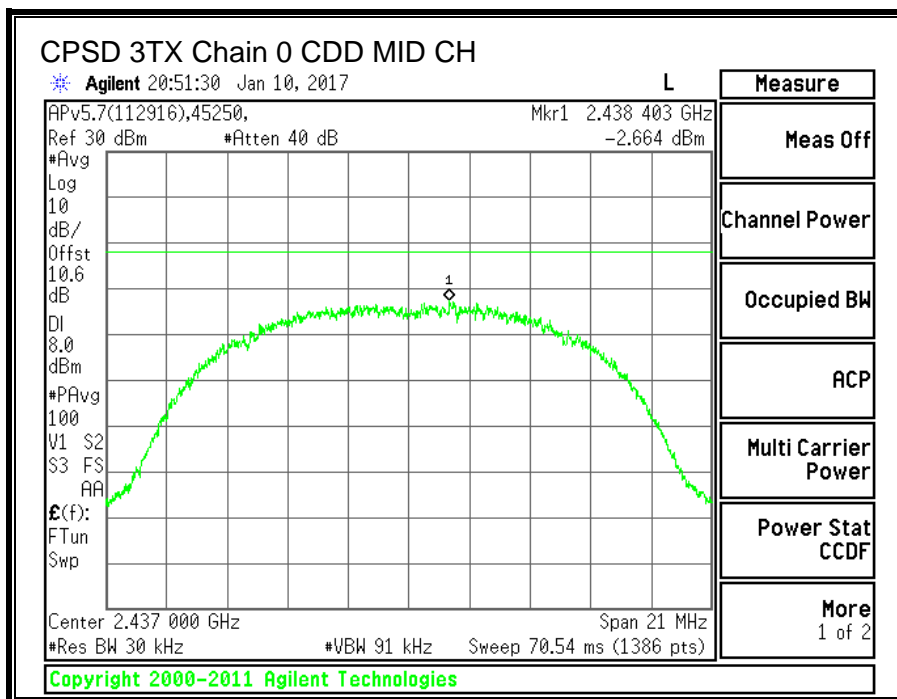
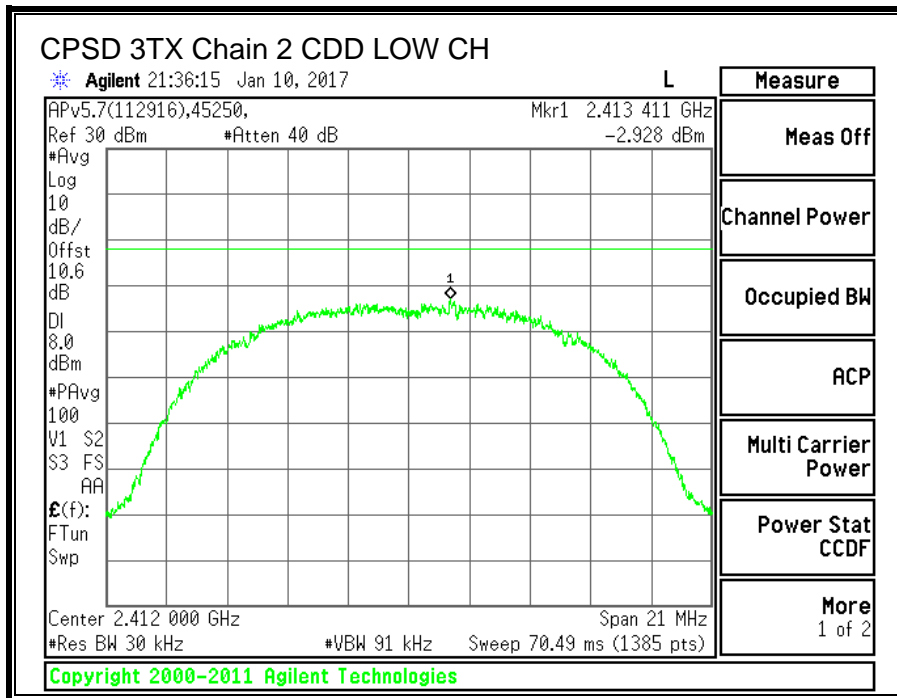


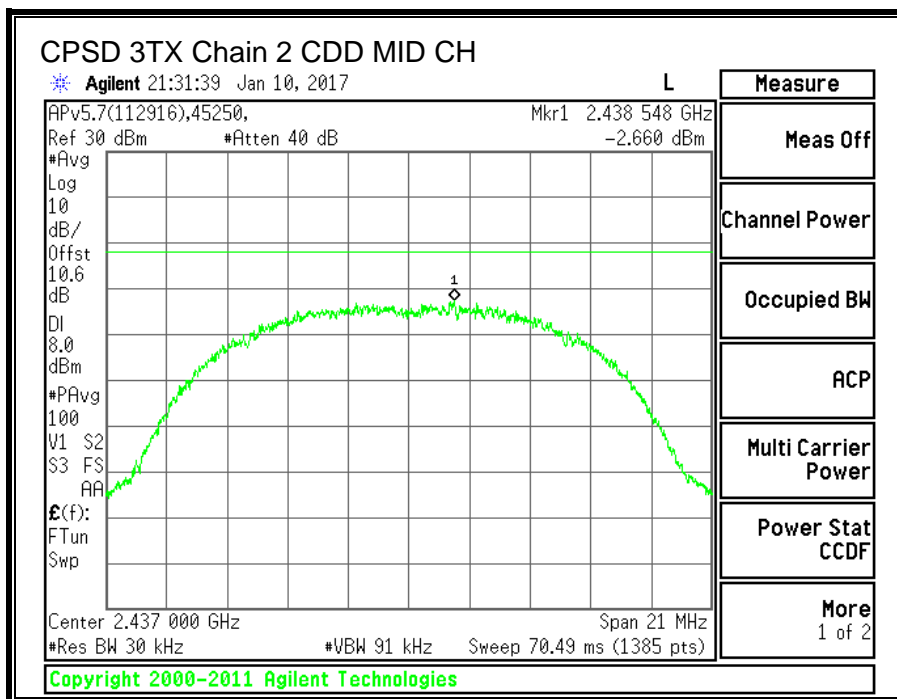
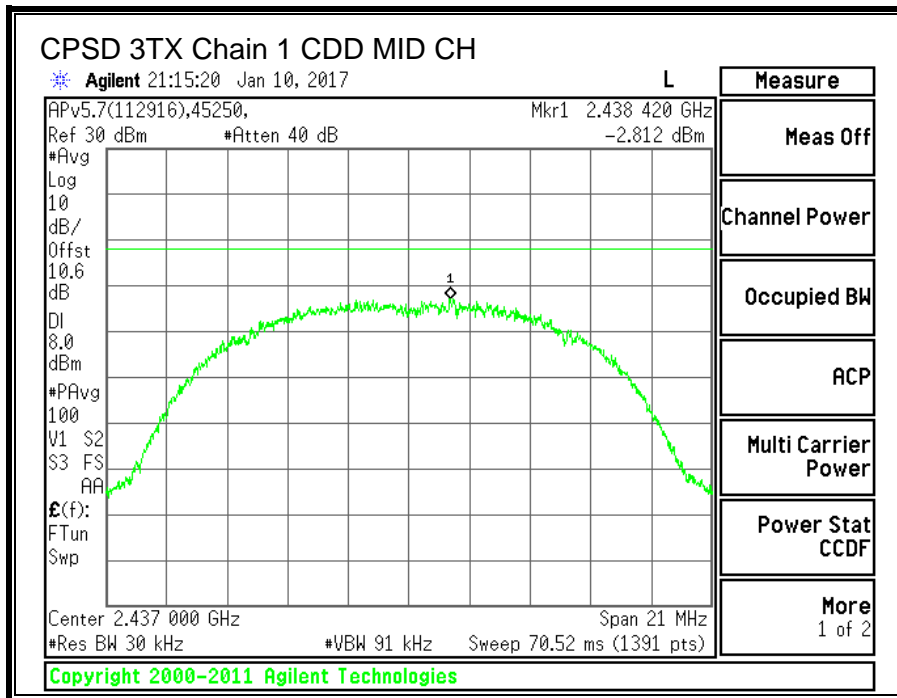


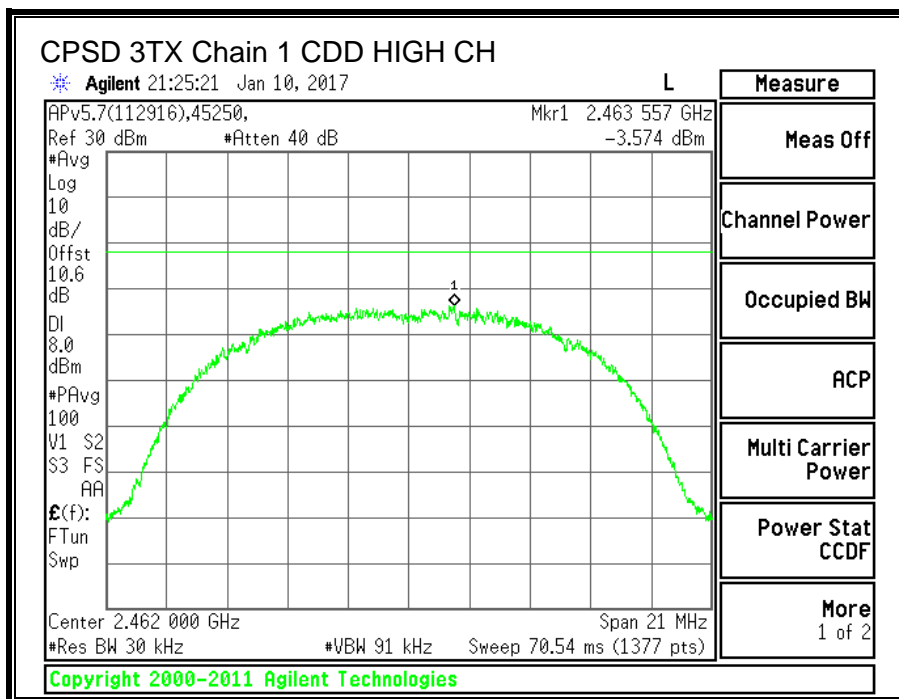
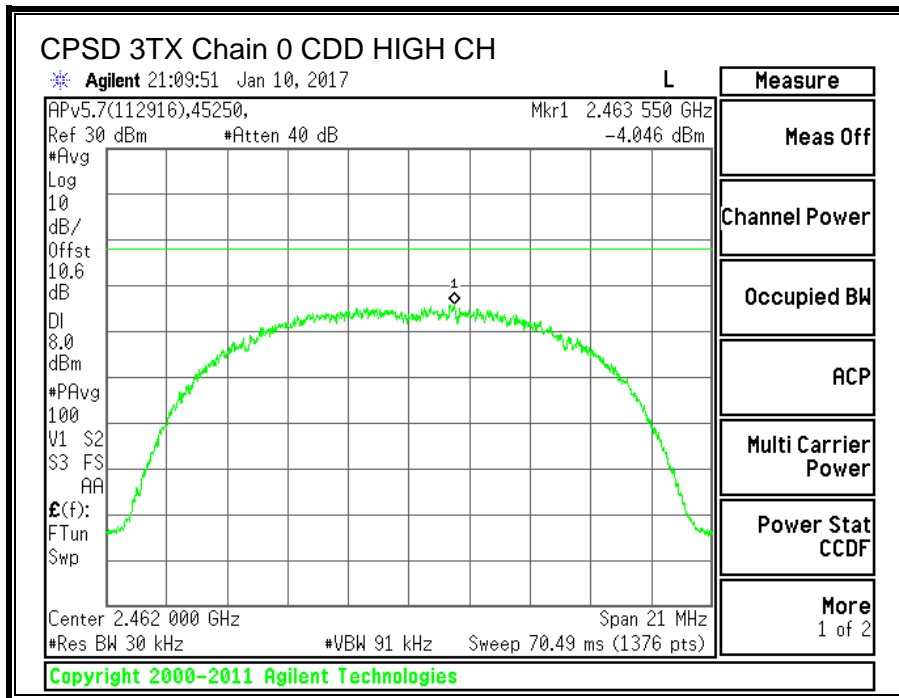



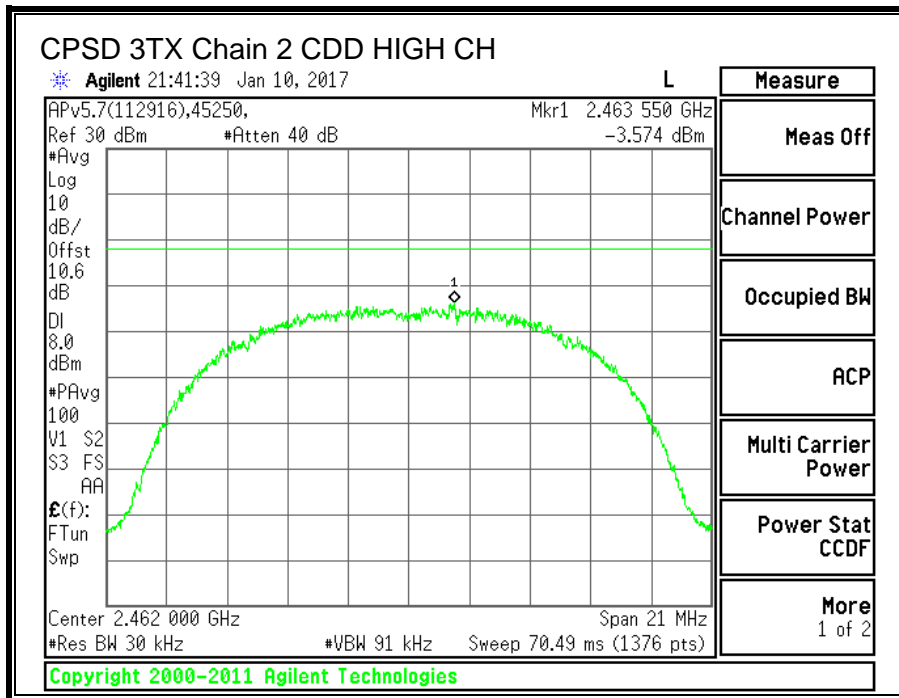




10.1.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

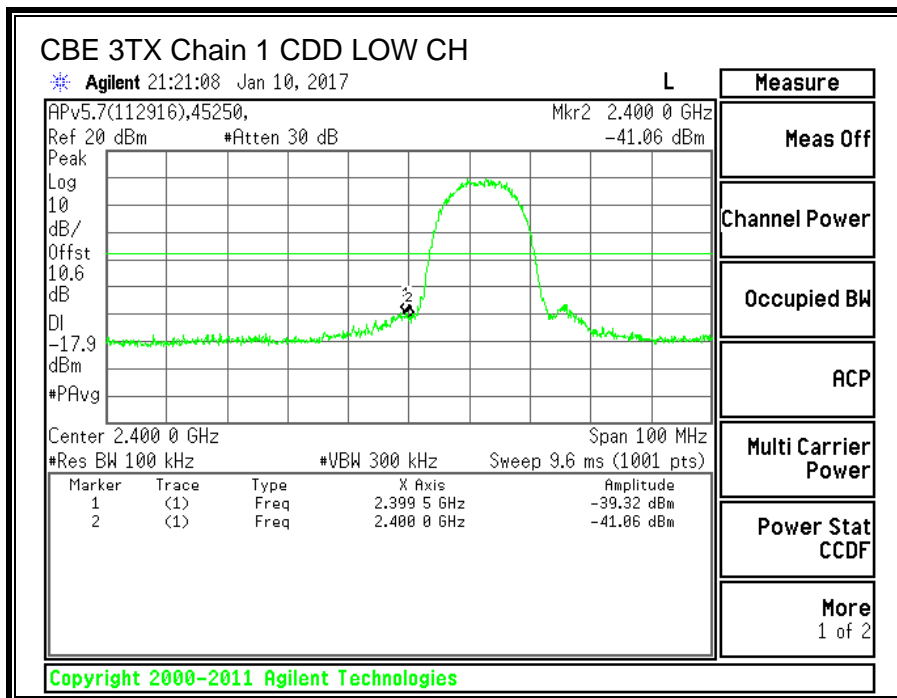
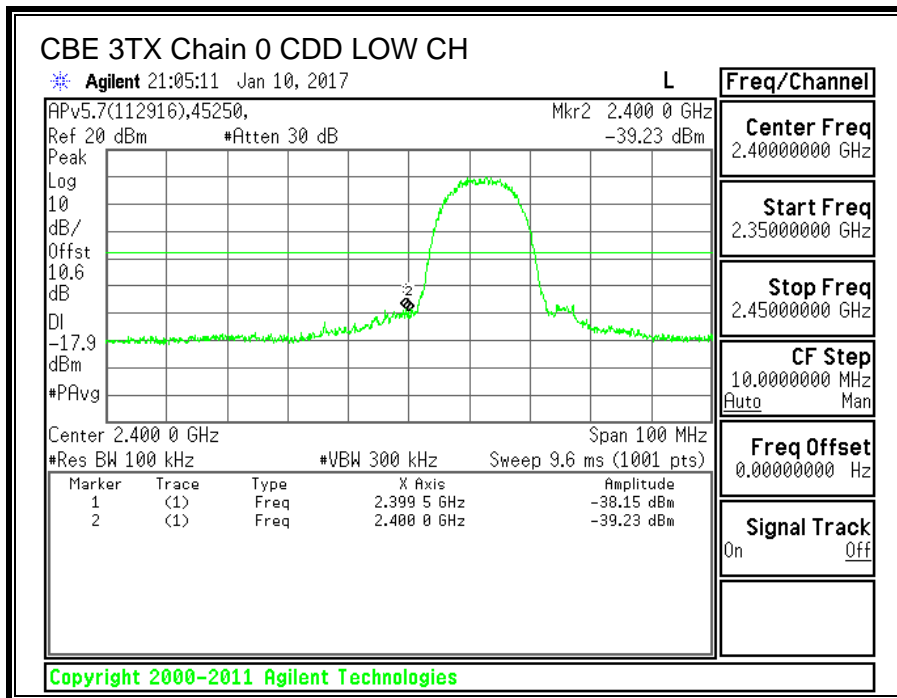


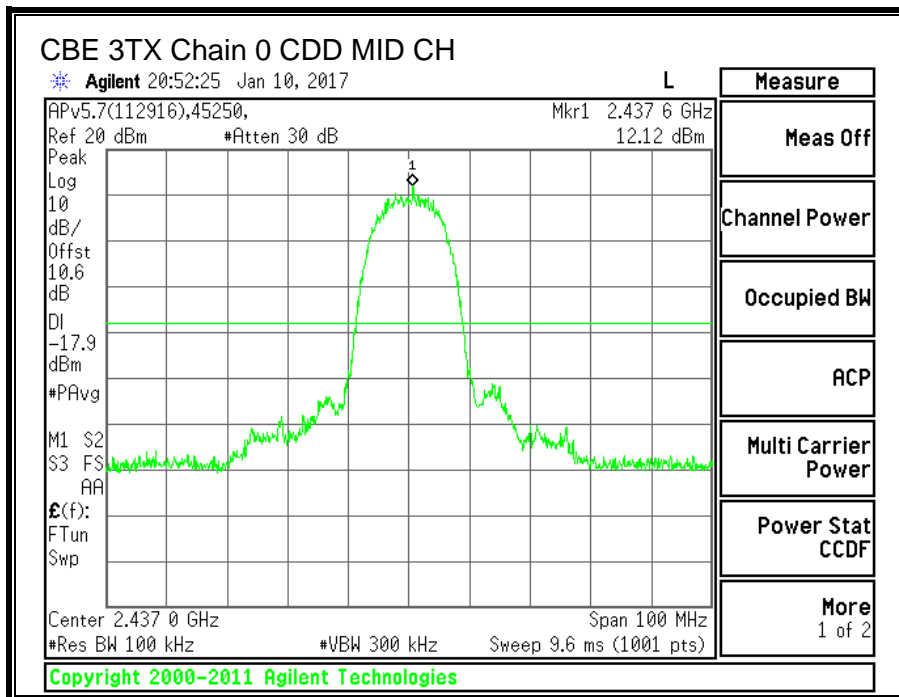
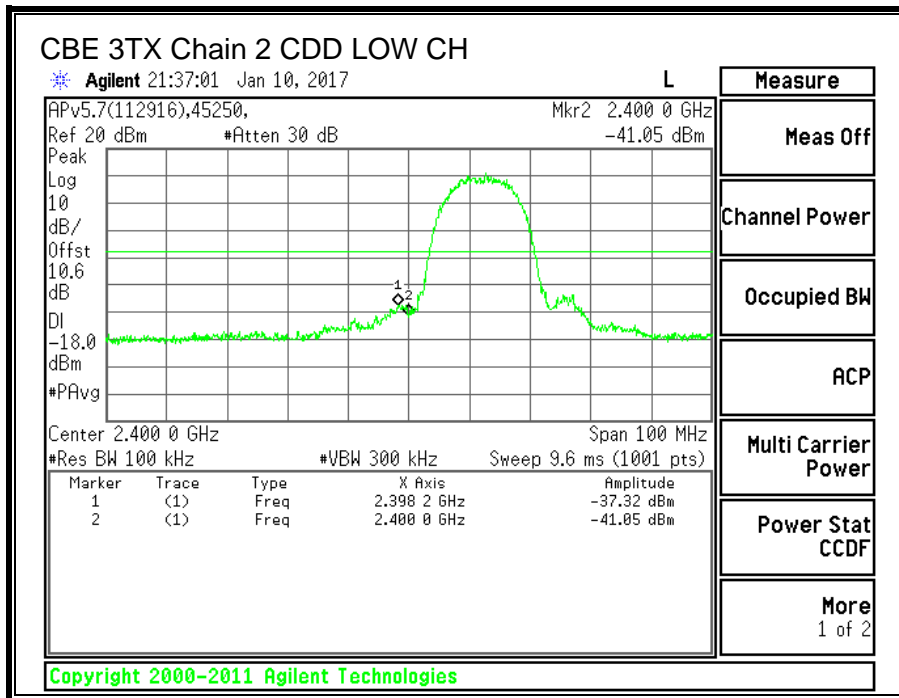


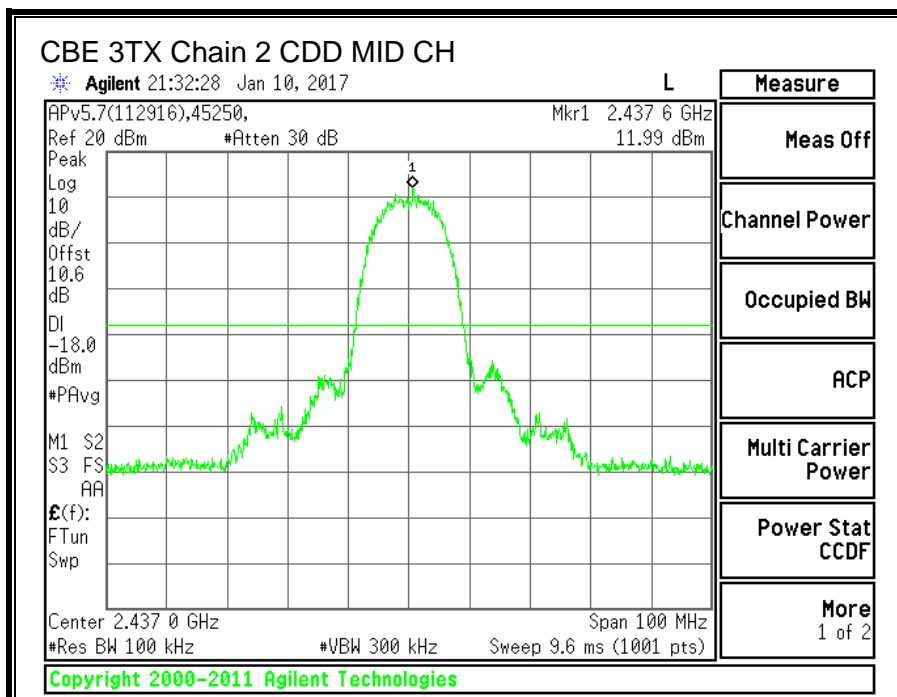
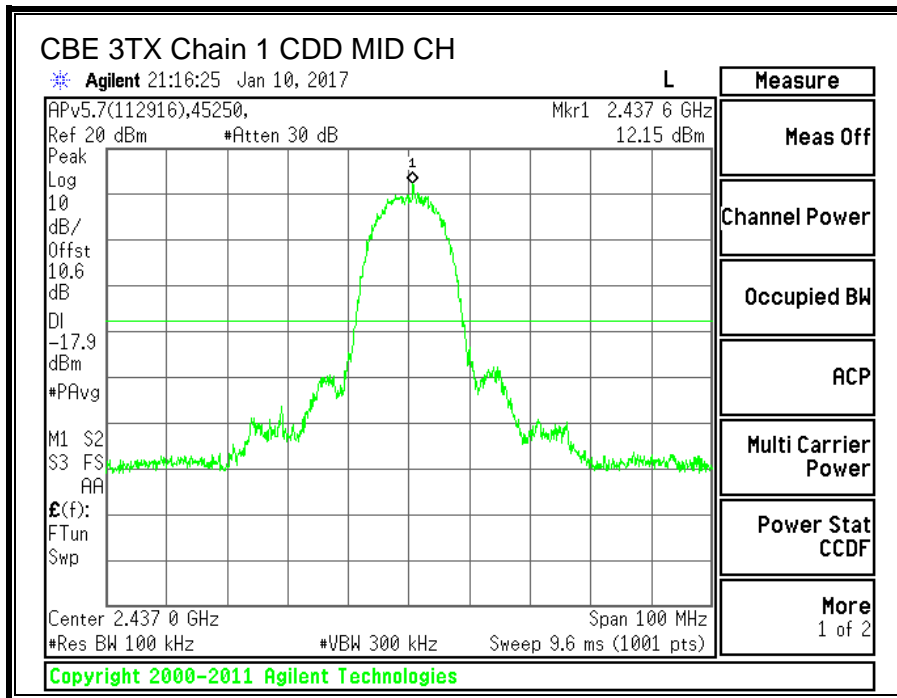


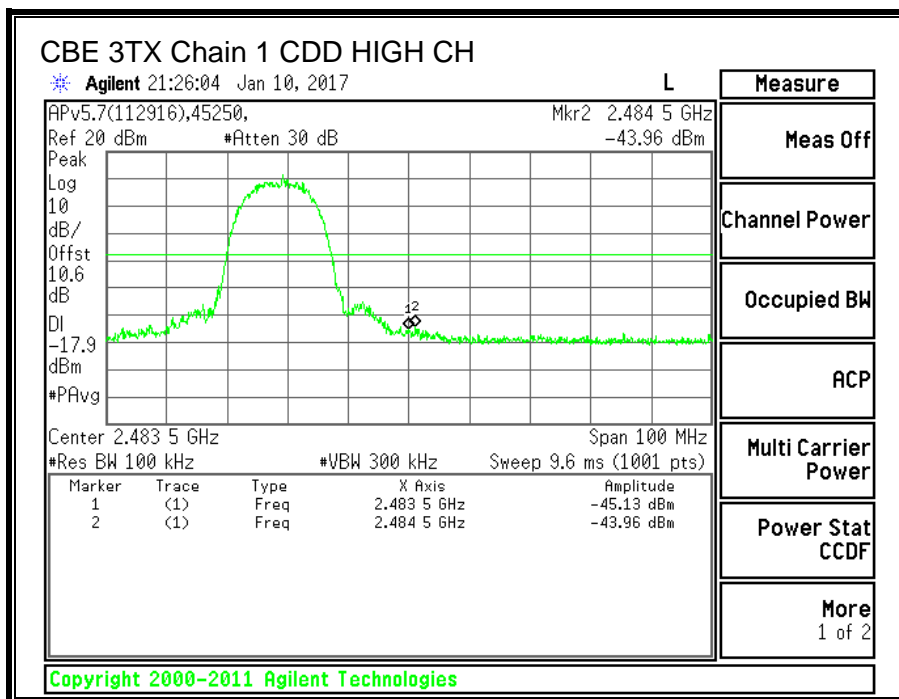
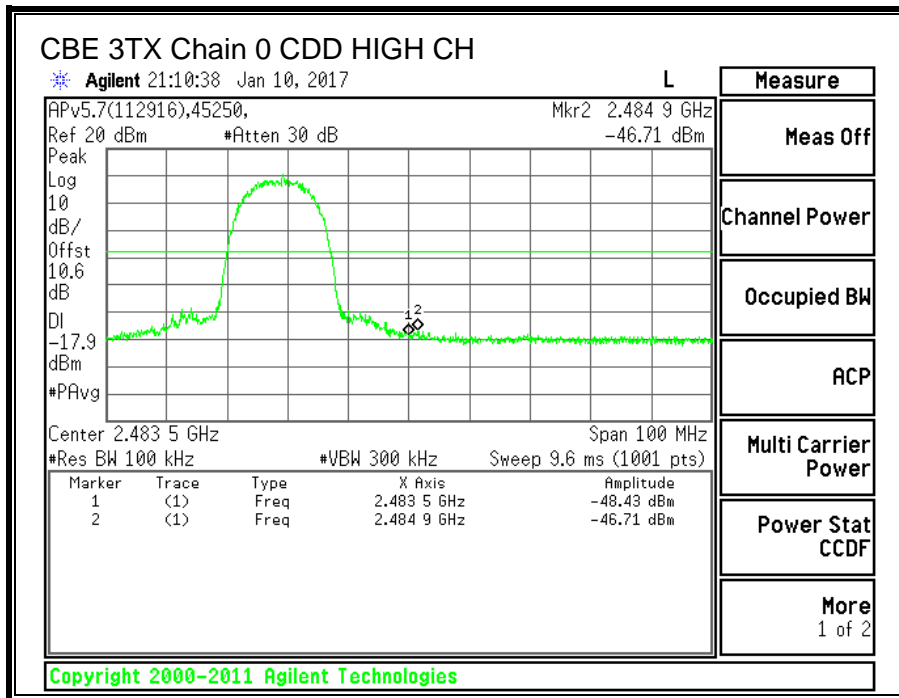


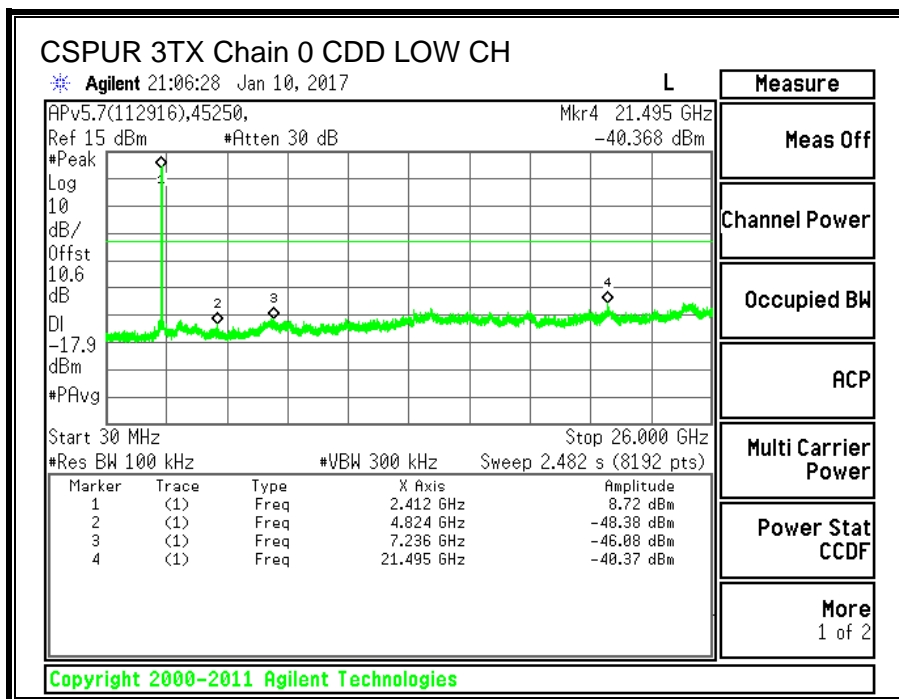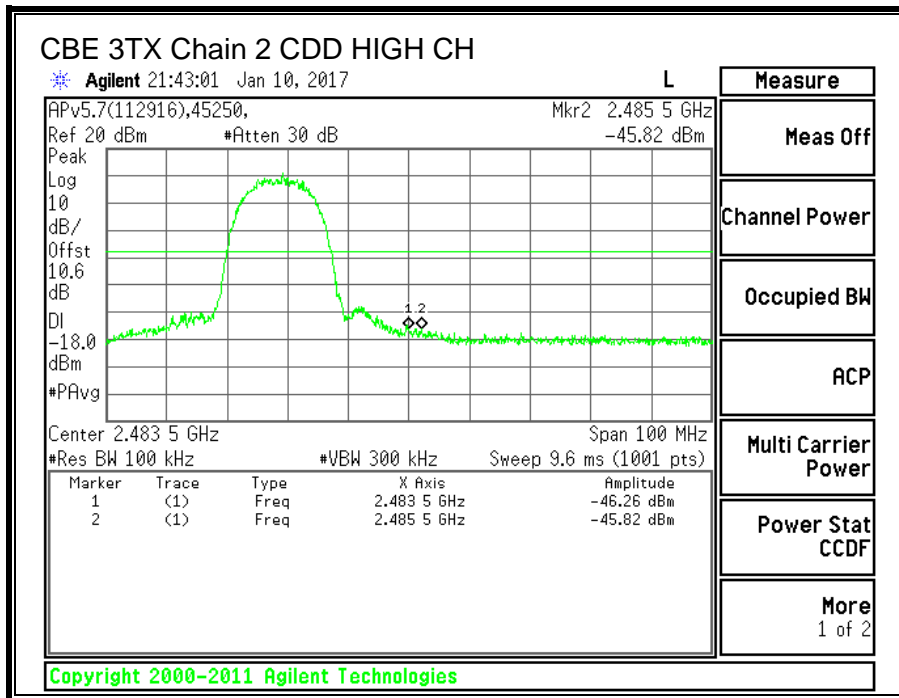

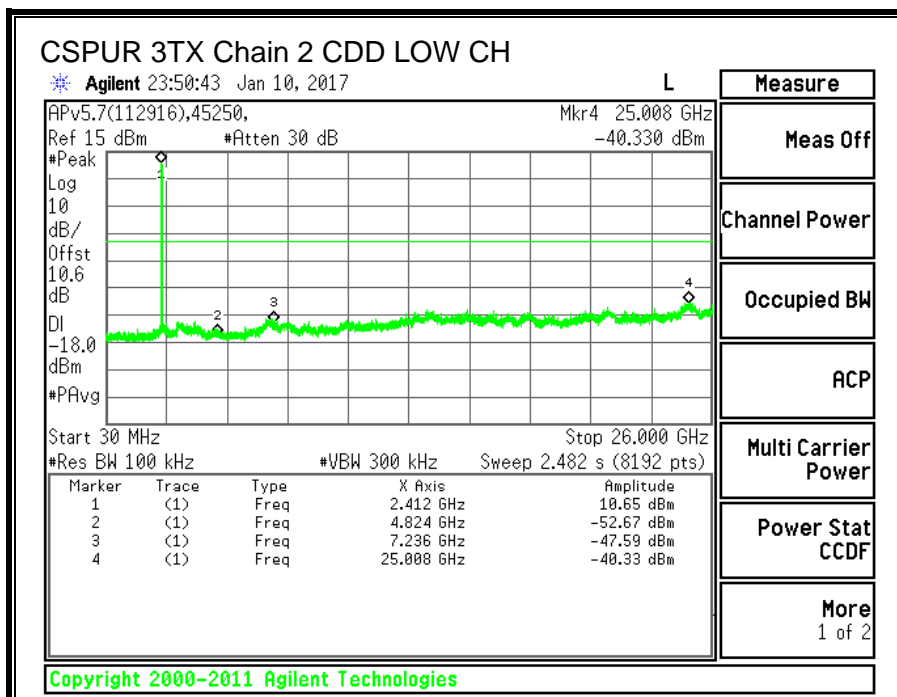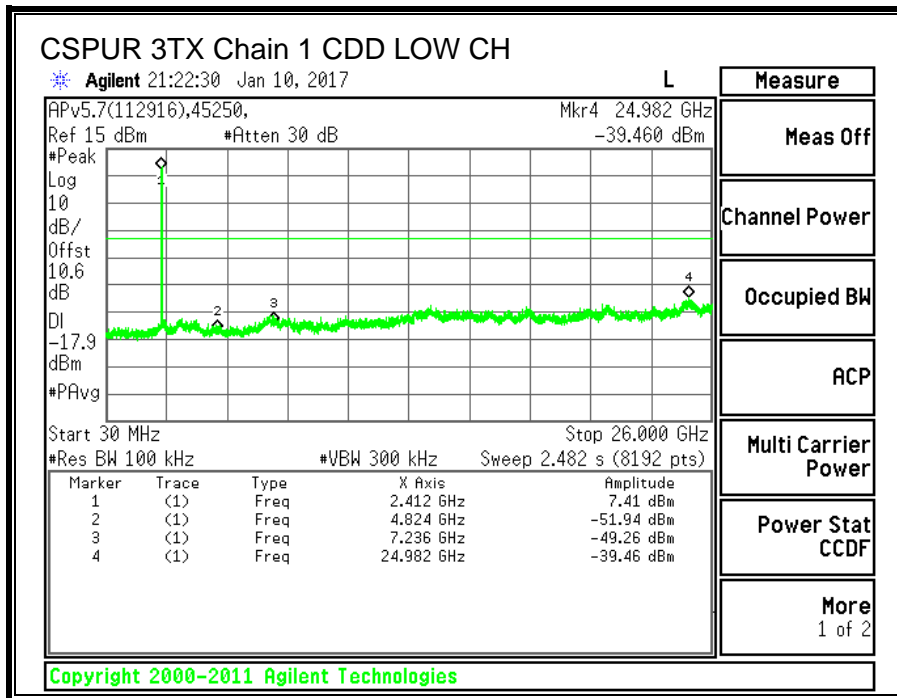

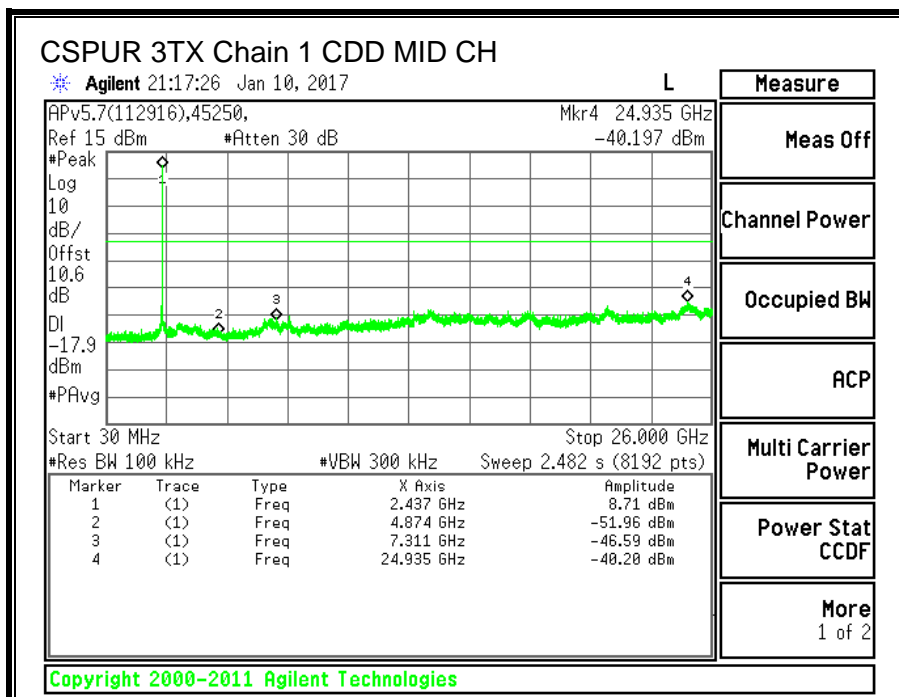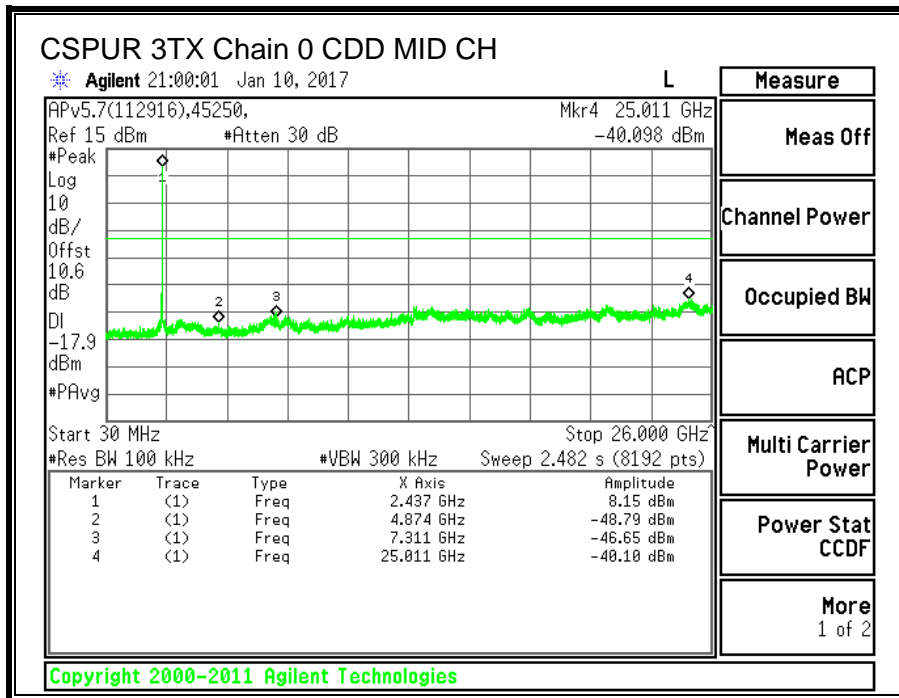

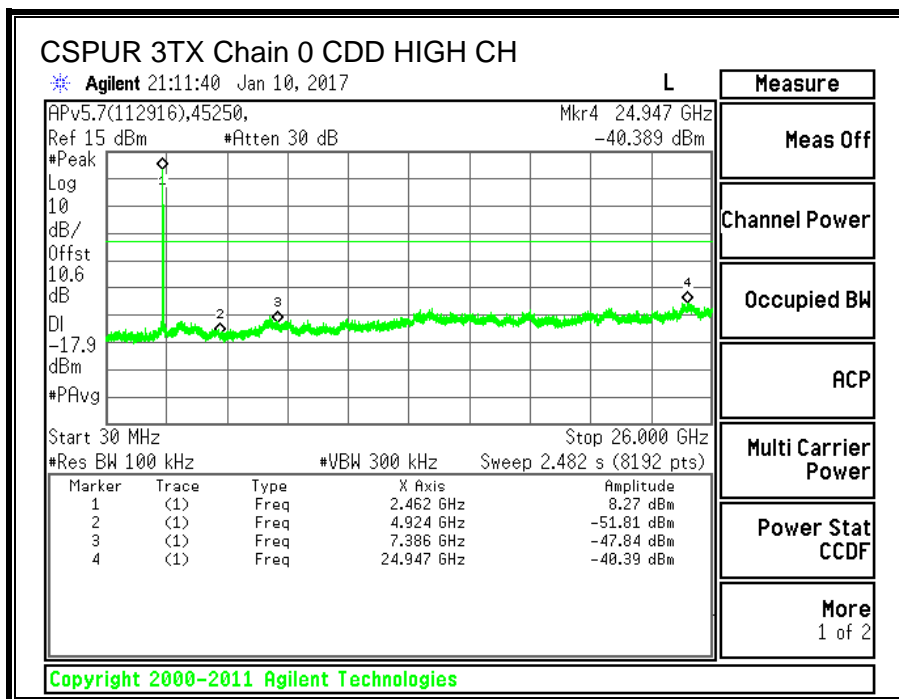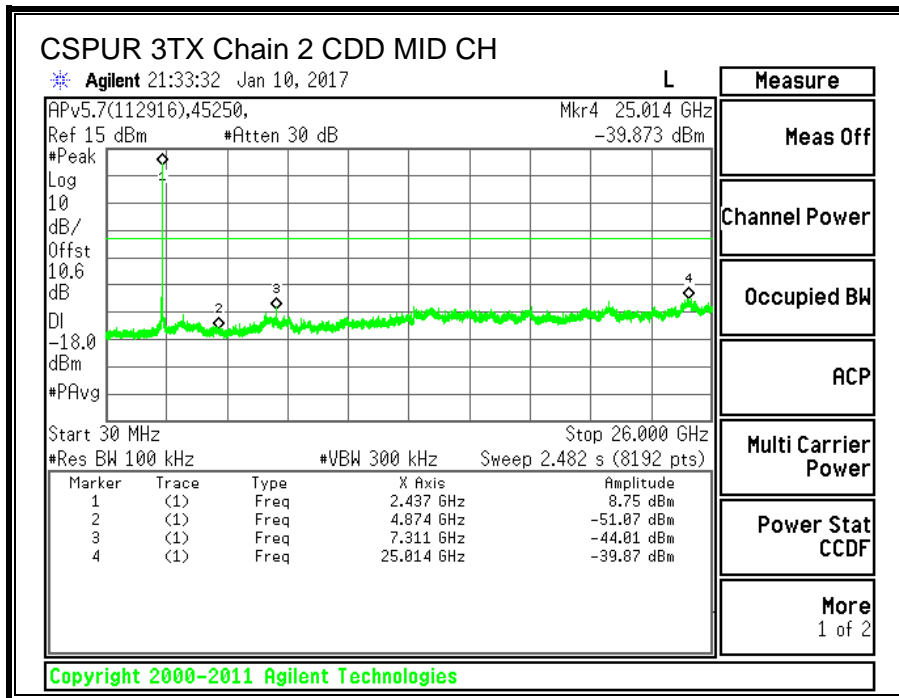

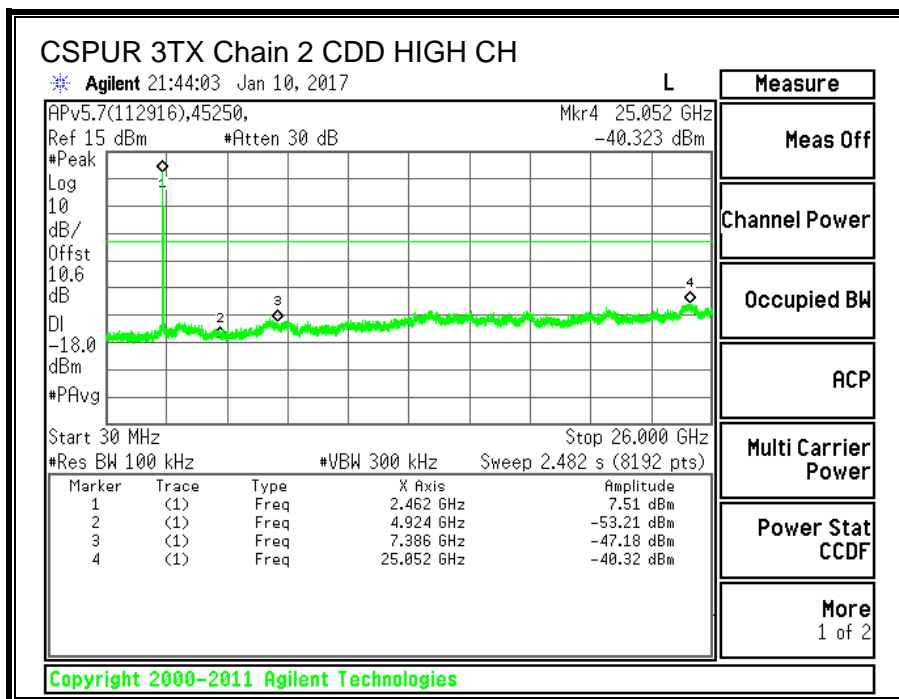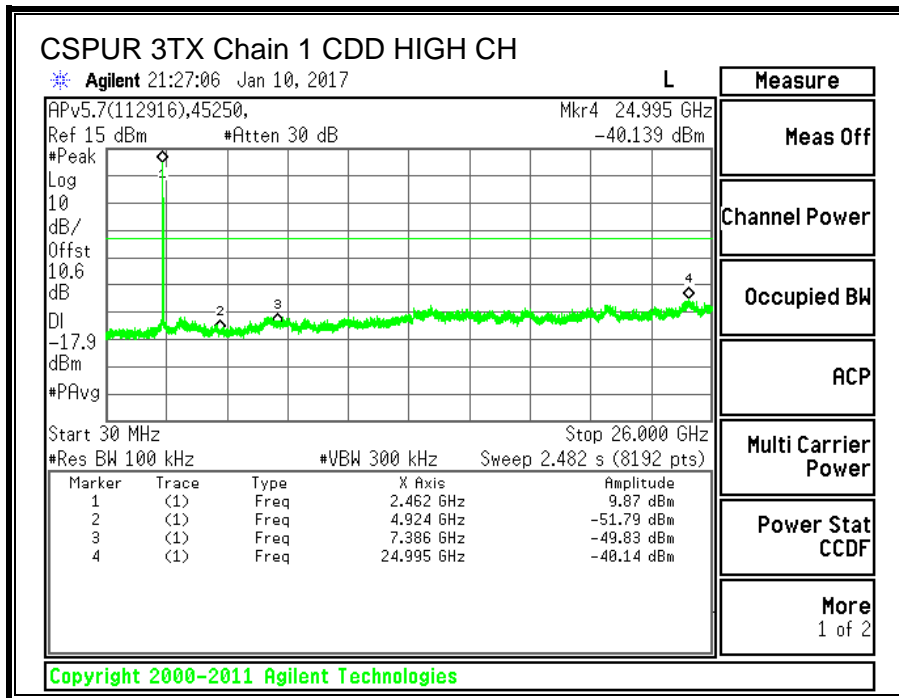

10.2. 11g 3TX CDD MIMO MODE IN THE 2.4GHz BAND

10.2.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-247 (5.2) (1)



The minimum 6 dB bandwidth shall be at least 500 kHz.



TEST PROCEDURE



KDB 58074 D01 v03r05 Section 8.1



RESULTS

| Channel | Frequency | 6 dB BW Chain 0 (MHz) | 6 dB BW Chain 1 (MHz) | 6 dB BW Chain 2 (MHz) | Minimum Limit (MHz) |
|----------|-----------|-----------------------|-----------------------|-----------------------|---------------------|
| Low_1 | 2412 | 16.475 | 16.470 | 16.445 | 0.5 |
| Middle_6 | 2437 | 16.450 | 16.430 | 16.400 | 0.5 |
| High_11 | 2462 | 16.445 | 16.445 | 16.450 | 0.5 |

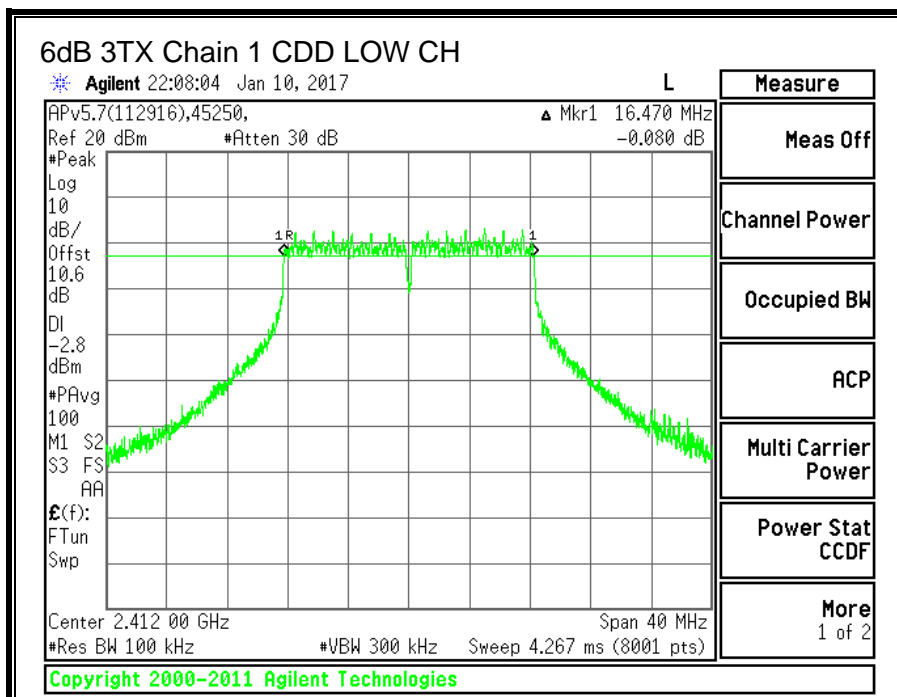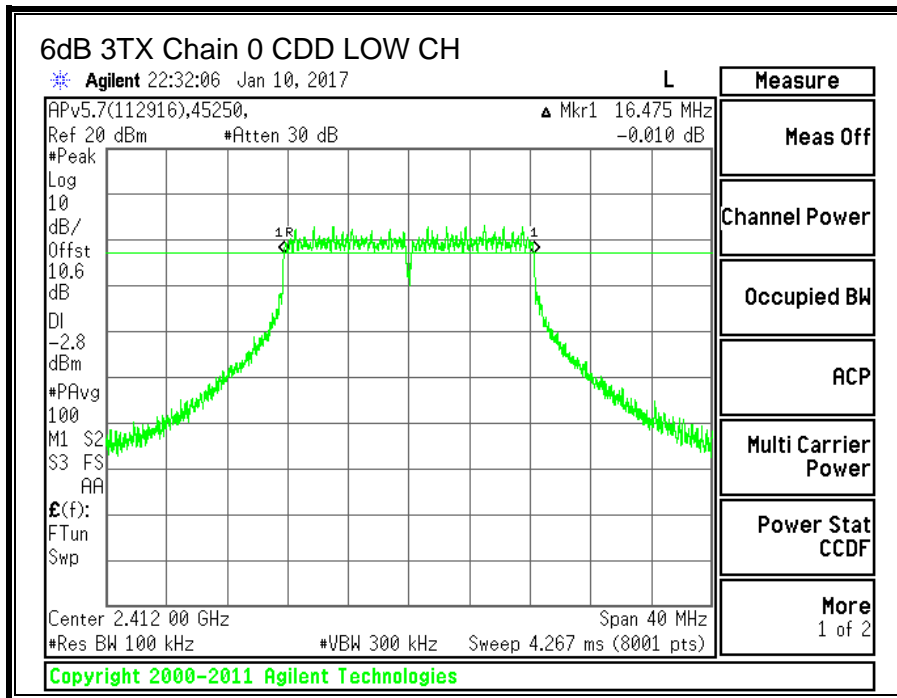

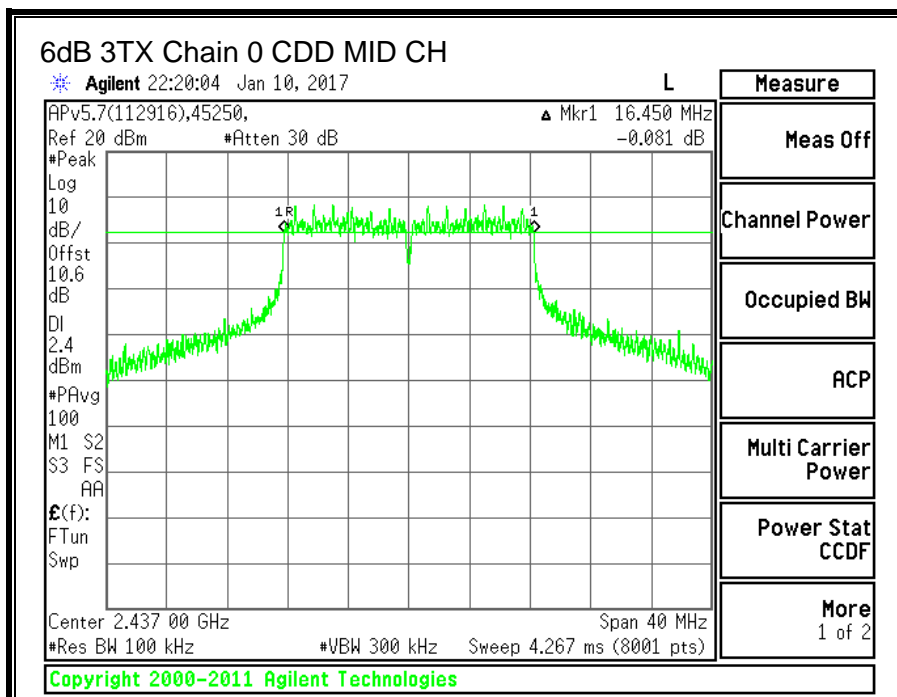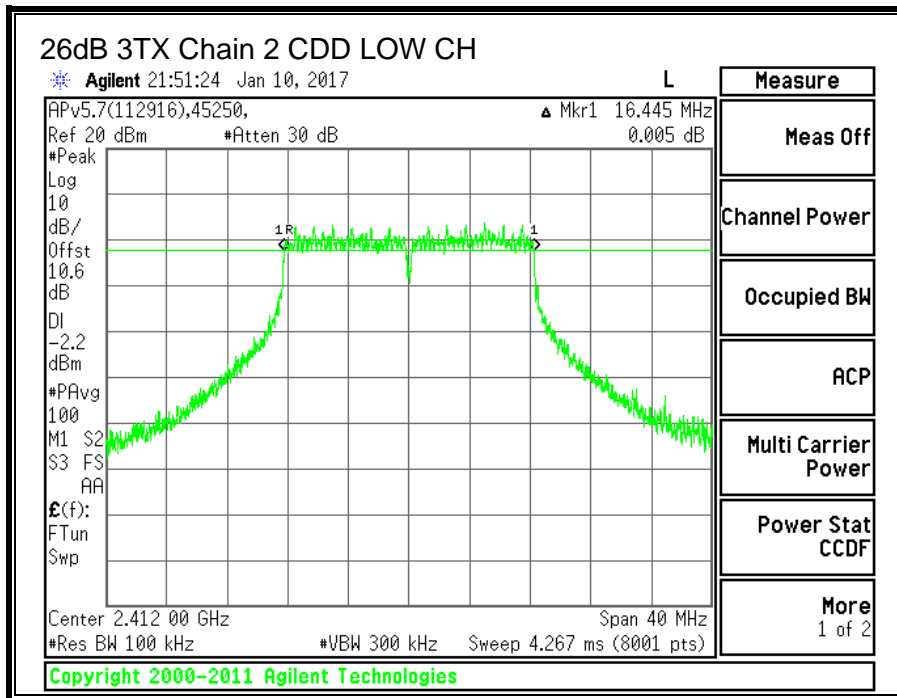

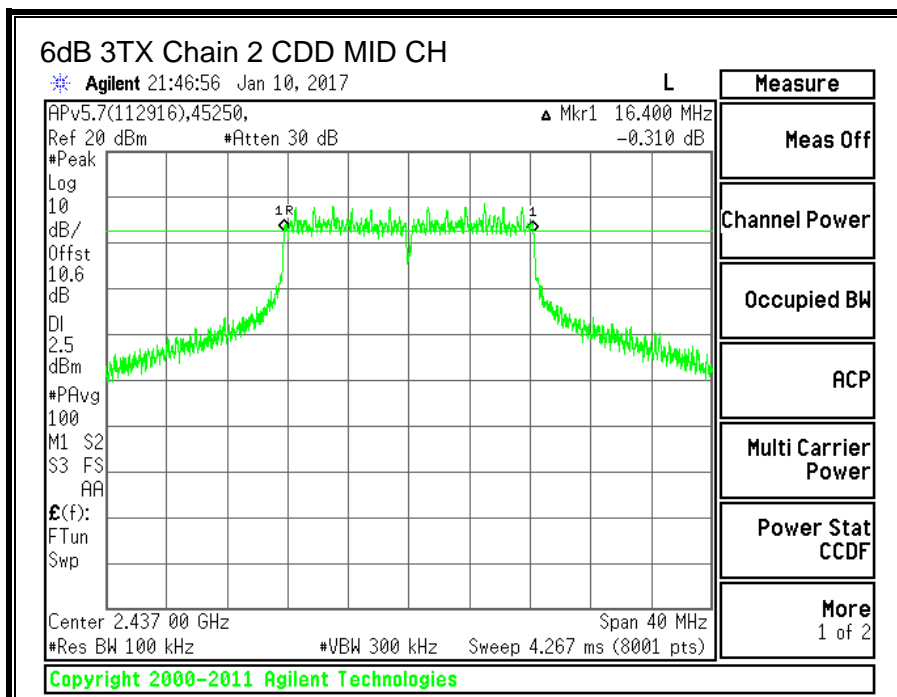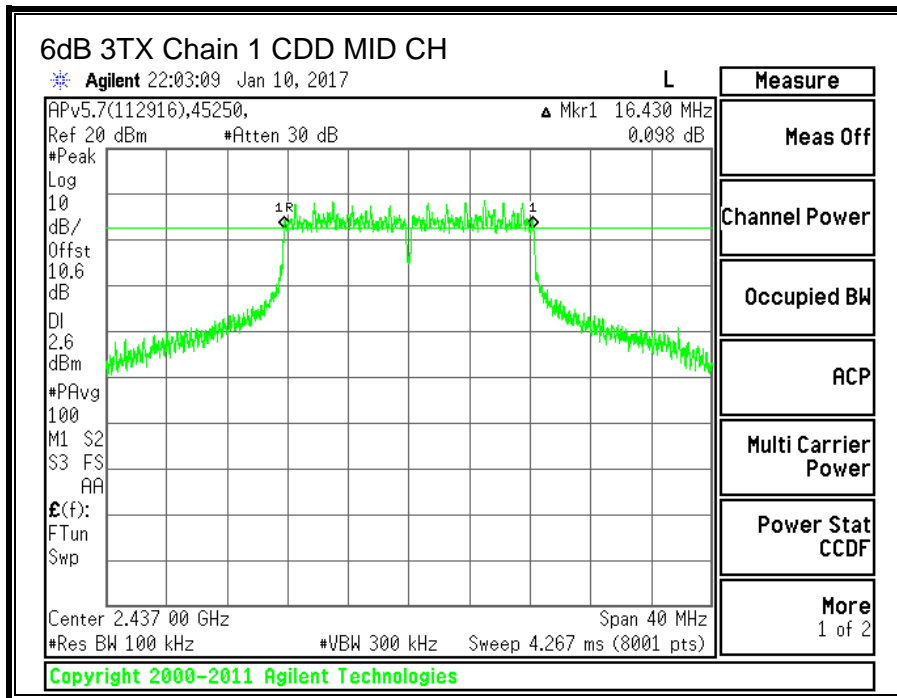

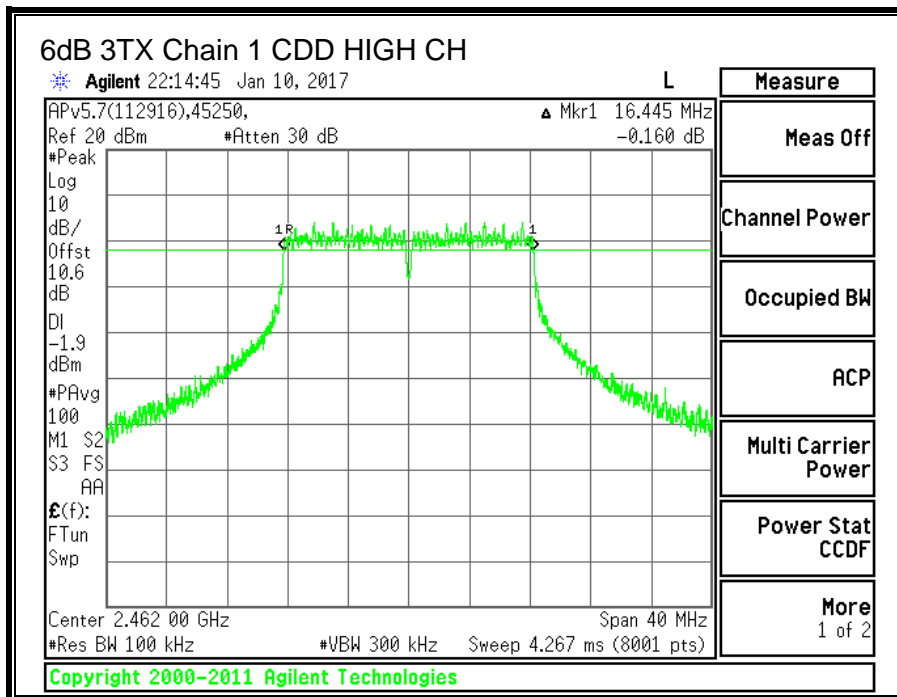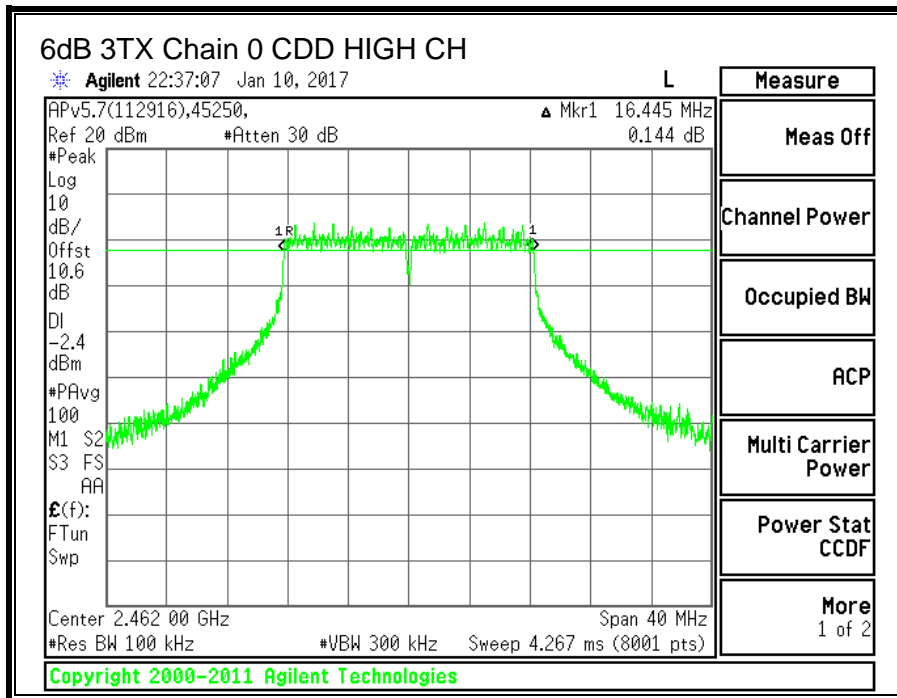

10.2.2. 99% BANDWIDTH

LIMITS



None; for reporting purposes only.



TEST PROCEDURE



ANSI C63.10: 2013 Section 6.9.3



RESULTS


| Channel | Frequency (MHz) | 99% Bandwidth Chain 0 (MHz) | 99% Bandwidth Chain 1 (MHz) | 99% Bandwidth Chain 2 (MHz) |
|----------|-----------------|-----------------------------|-----------------------------|-----------------------------|
| Low_1 | 2412 | 16.6594 | 16.7113 | 16.7452 |
| Middle_6 | 2437 | 16.9661 | 16.9758 | 17.0427 |
| High_11 | 2462 | 16.7644 | 16.6855 | 16.7318 |

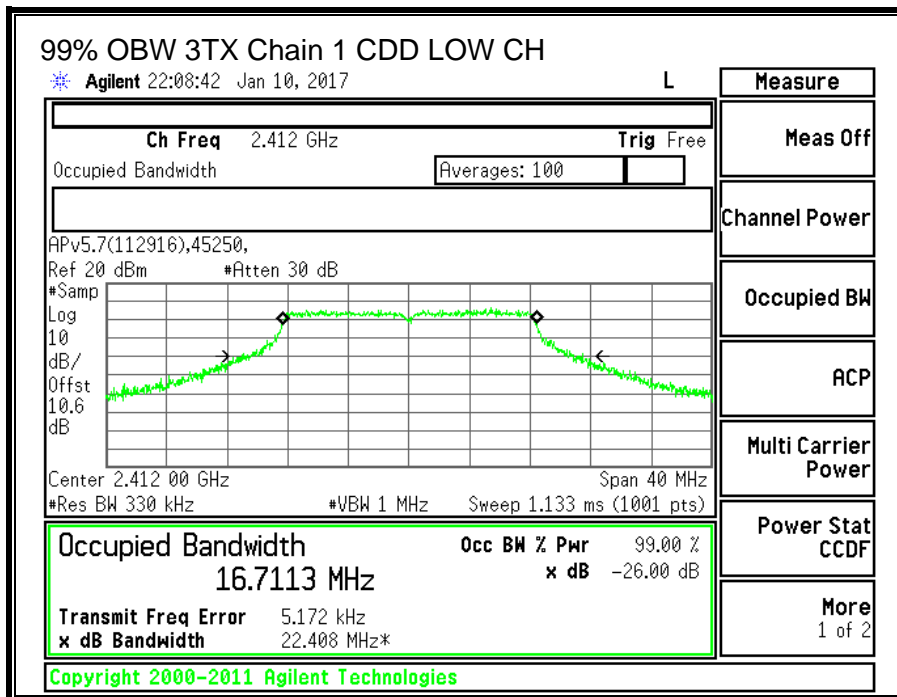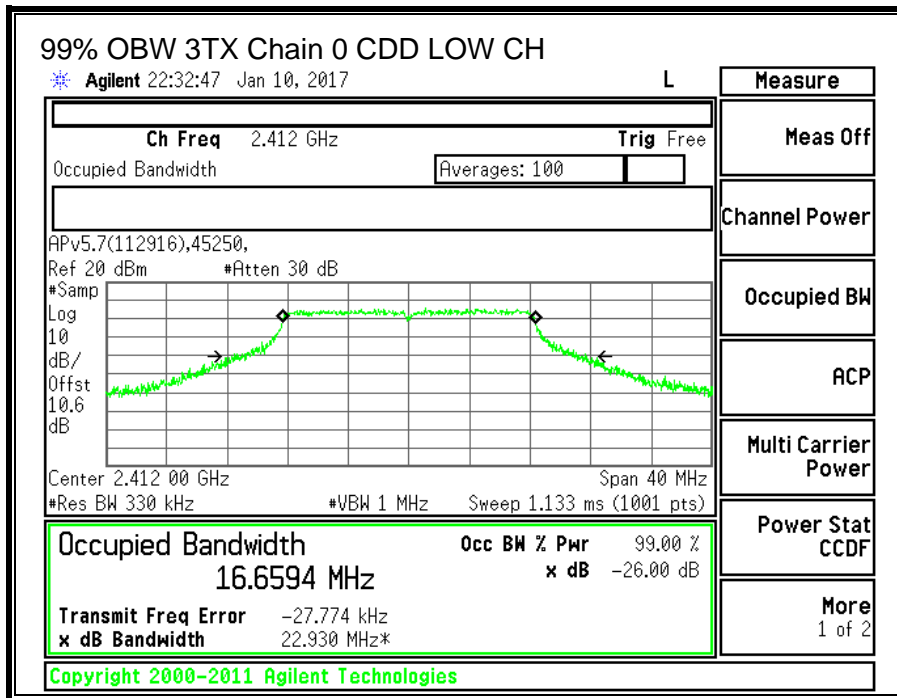

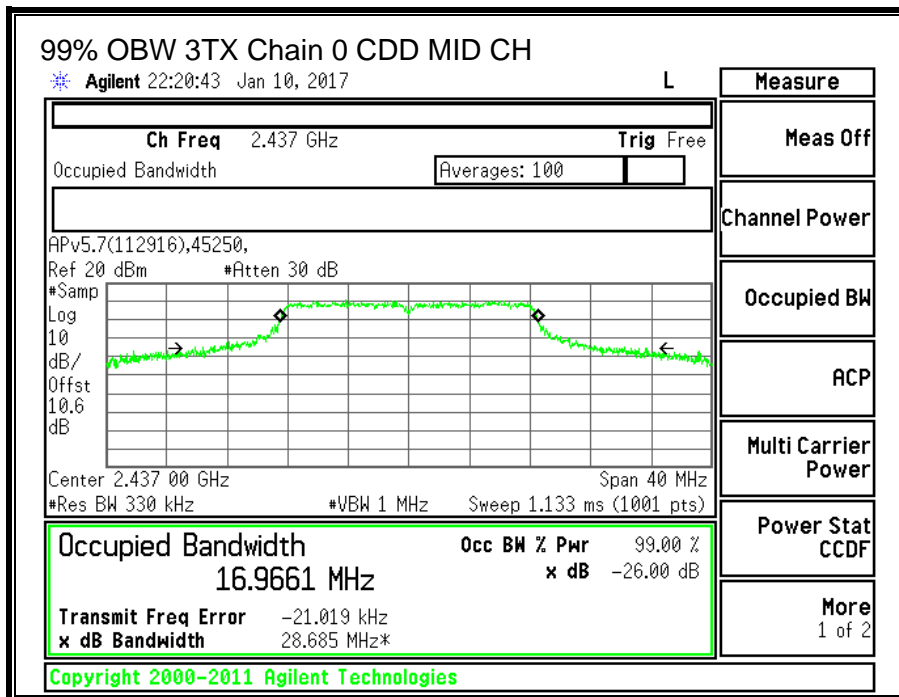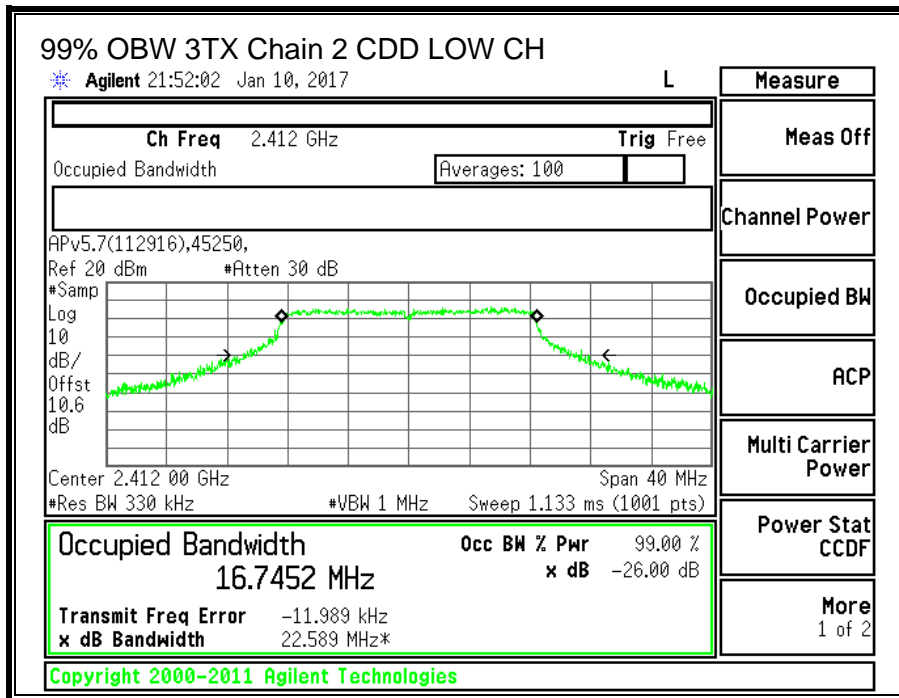

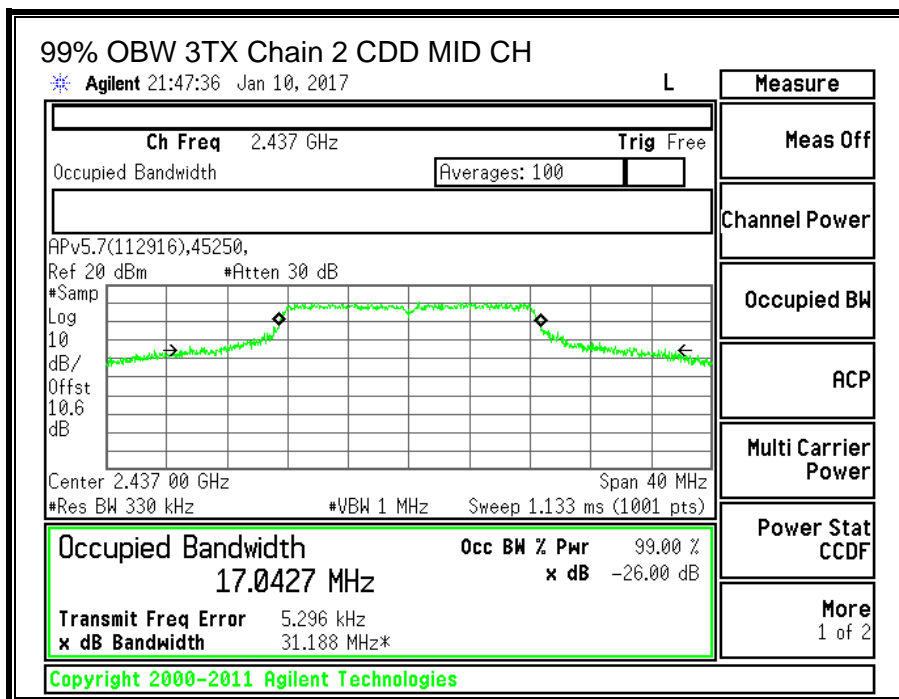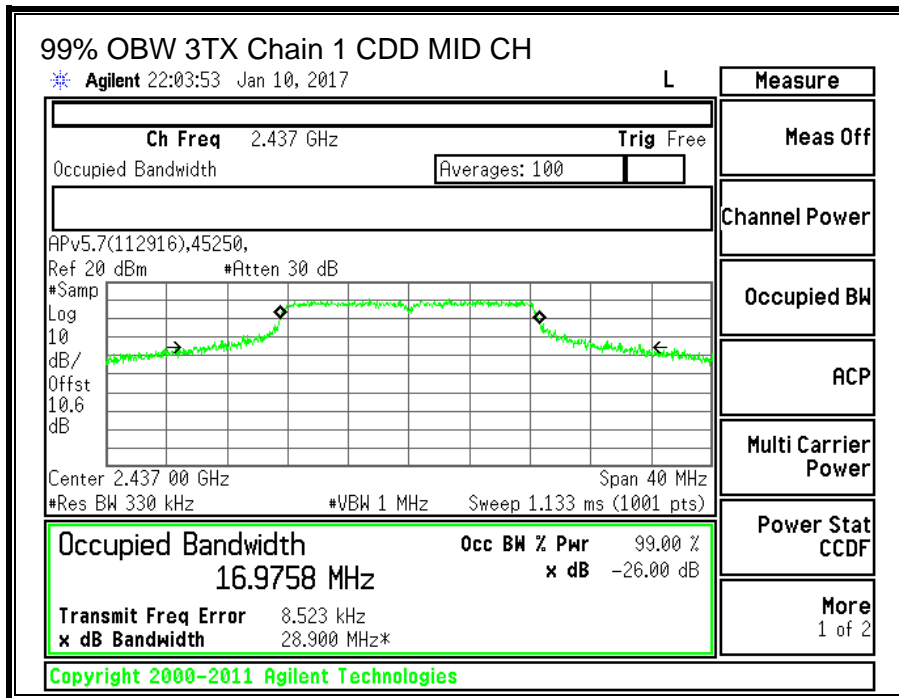

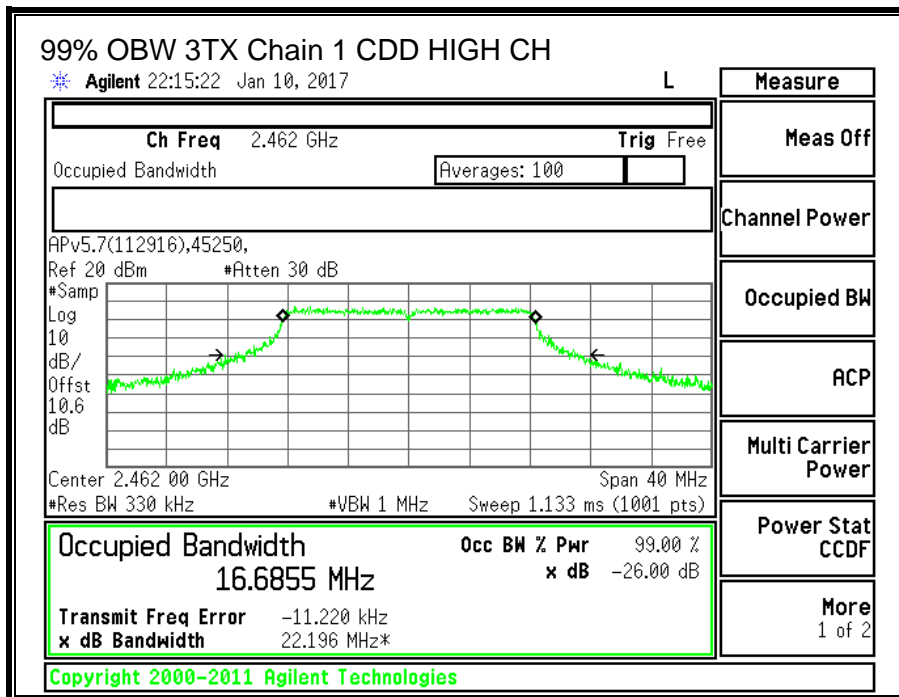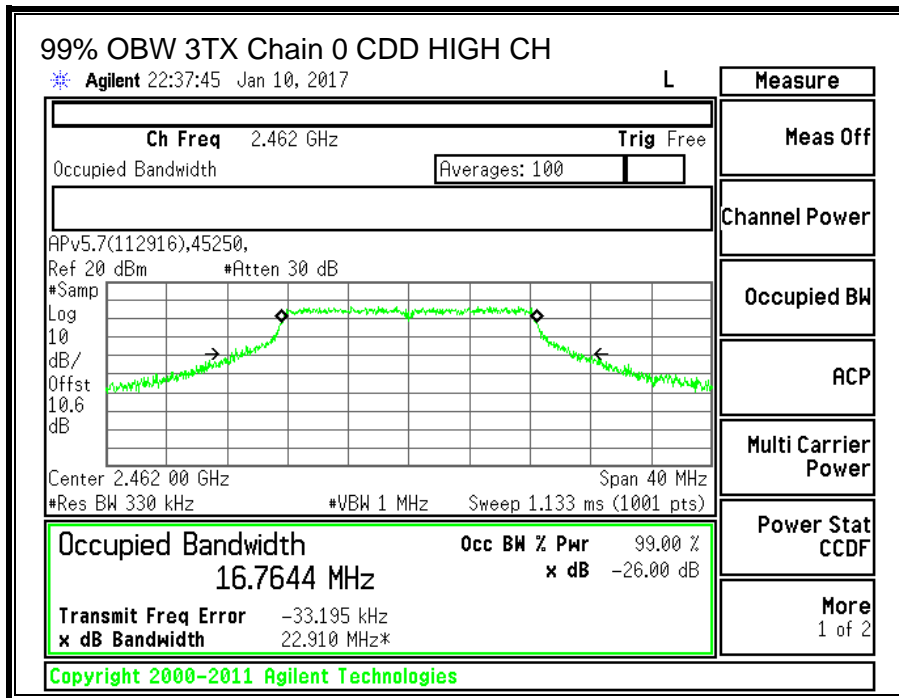

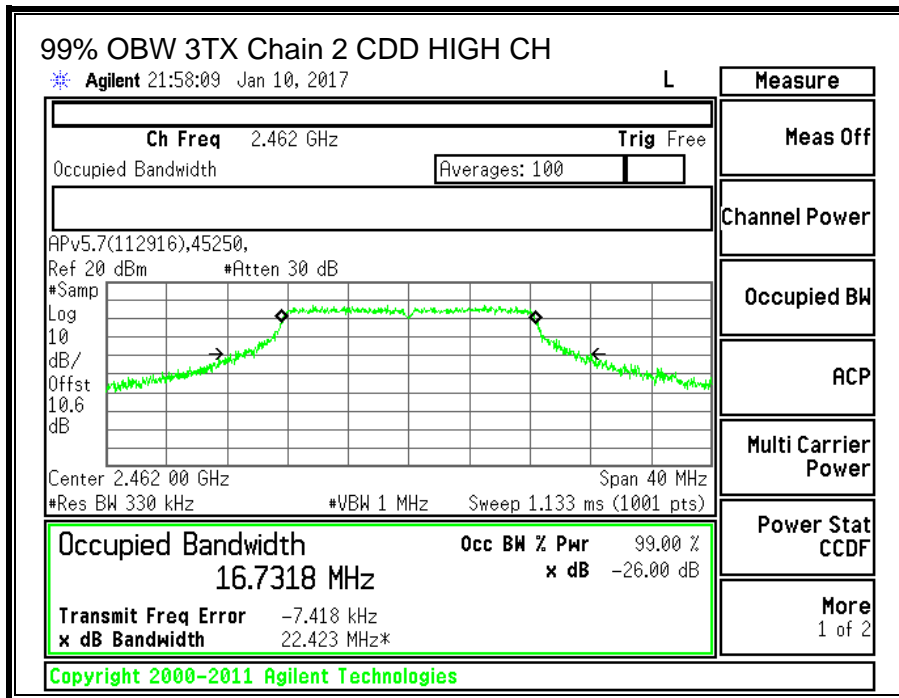

10.2.3. OUTPUT POWER

LIMITS

FCC §15.247

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

Each transmit antenna is driven by only one spatial stream

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

| Chain 0 Gain (dBi) | Chain 1 Gain (dBi) | Chain 2 Gain (dBi) | Correlated Chains Directional Gain (dBi) |
|-----------------------|-----------------------|-----------------------|---|
| 4.3 | 3.5 | 1.6 | 4.3 |

Directional Antenna Gain Calculation: KDB 662911 D01 Section F) 2) f) (ii)

Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain

TEST PROCEDURE

KDB 58074 D01 v03r05 Section 9.2.3.2

RESULTS

| | | | |
|------------|-------|--------------|------------|
| ID: | 45250 | Date: | 01/10/2017 |
|------------|-------|--------------|------------|

Limits

| Channel | Frequency (MHz) | Directional Gain (dBi) | FCC Power Limit (dBm) | IC Power Limit (dBm) | IC EIRP Limit (dBm) | Max Power (dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low | 2412 | 4.30 | 30.00 | 30 | 36 | 30.00 |
| Mid | 2437 | 4.30 | 30.00 | 30 | 36 | 30.00 |
| High | 2462 | 4.30 | 30.00 | 30 | 36 | 30.00 |

Results

| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Chain 1 Meas Power (dBm) | Chain 2 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|----------------|
| Low | 2412 | 14.10 | 13.95 | 14.20 | 18.86 | 30.00 | -11.14 |
| Mid | 2437 | 18.95 | 18.97 | 19.05 | 23.76 | 30.00 | -6.24 |
| High | 2462 | 15.14 | 15.21 | 15.23 | 19.96 | 30.00 | -10.04 |

Note: the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

10.2.4. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.



TEST PROCEDURE



KDB 58074 D01 v03r05 Section 10.3



RESULTS



| Duty Cycle CF (dB) | 0.404 | Included in Calculations of Corr'd PSD | | | | | |
|---------------------------|----------------------------|---|-----------------------------------|-----------------------------------|---|------------------------|------------------------|
| PSD Results | | | | | | | |
| Channel | Frequency (MHz) | Chain 0 Meas (dBm) | Chain 1 Meas (dBm) | Chain 2 Meas (dBm) | Total Corr'd PSD (dBm) | Limit (dBm) | Margin (dB) |
| Low | 2412 | -10.50 | -10.39 | -9.87 | -5.07 | 8.0 | -13.1 |
| Mid | 2437 | -5.07 | -5.47 | -4.97 | 0.01 | 8.0 | -8.0 |
| High | 2462 | -9.73 | -9.43 | -9.40 | -4.34 | 8.0 | -12.3 |


Correlated PSD Calculation Method: KDB 662911 D01 Section E) 2) c)

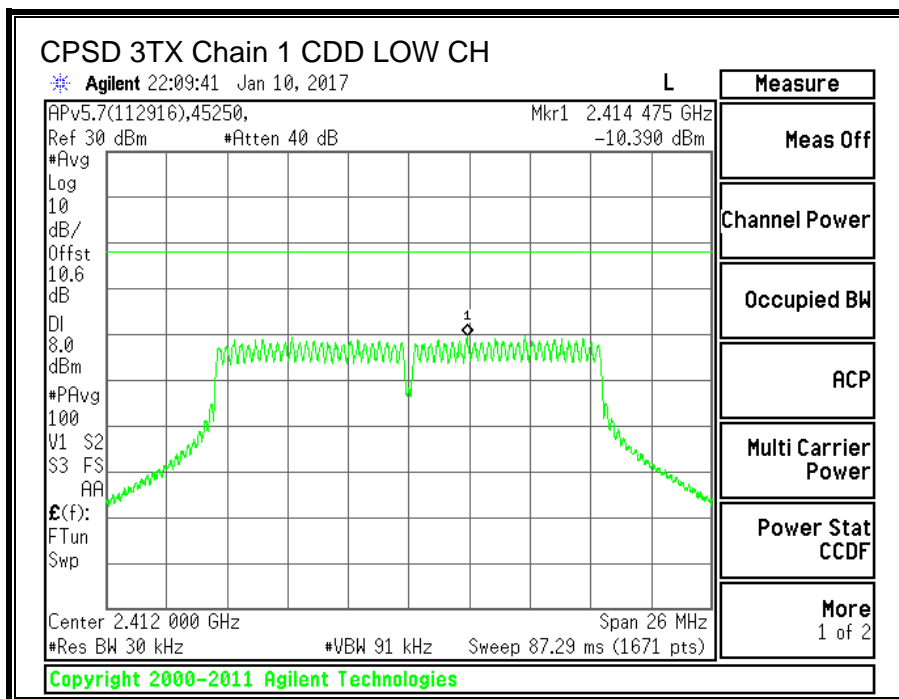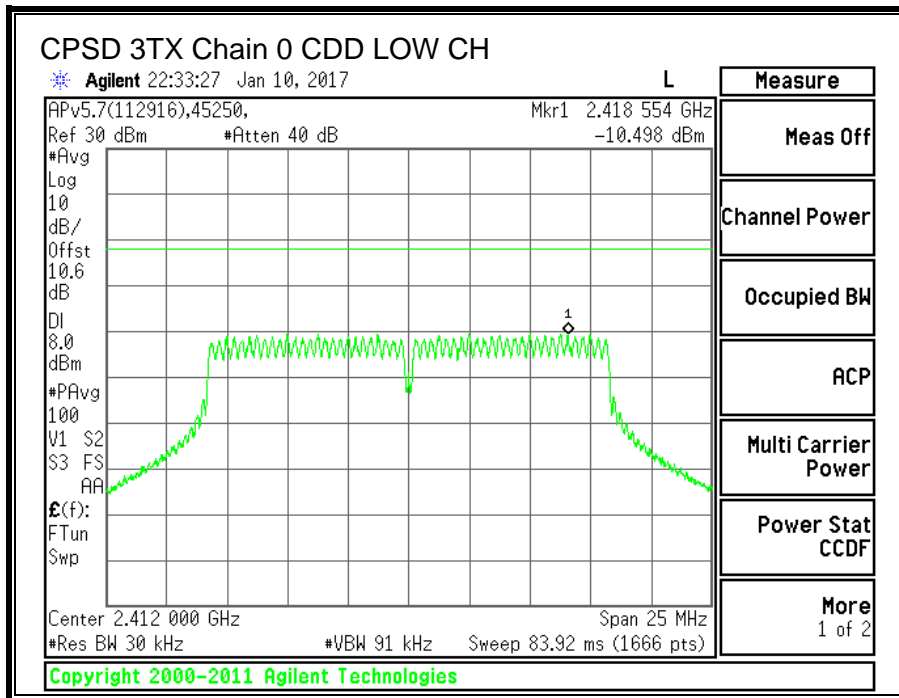

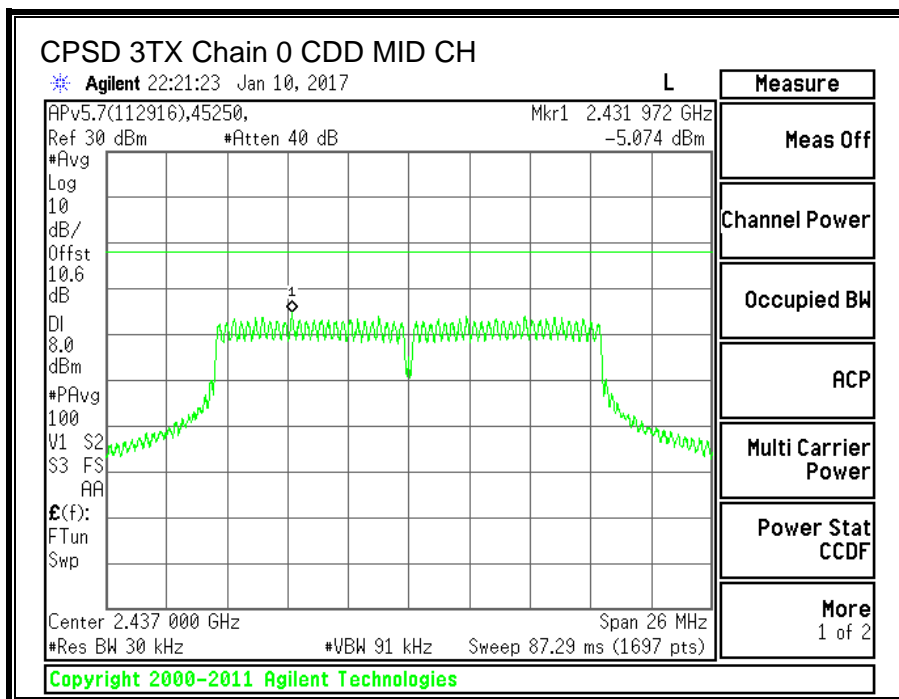
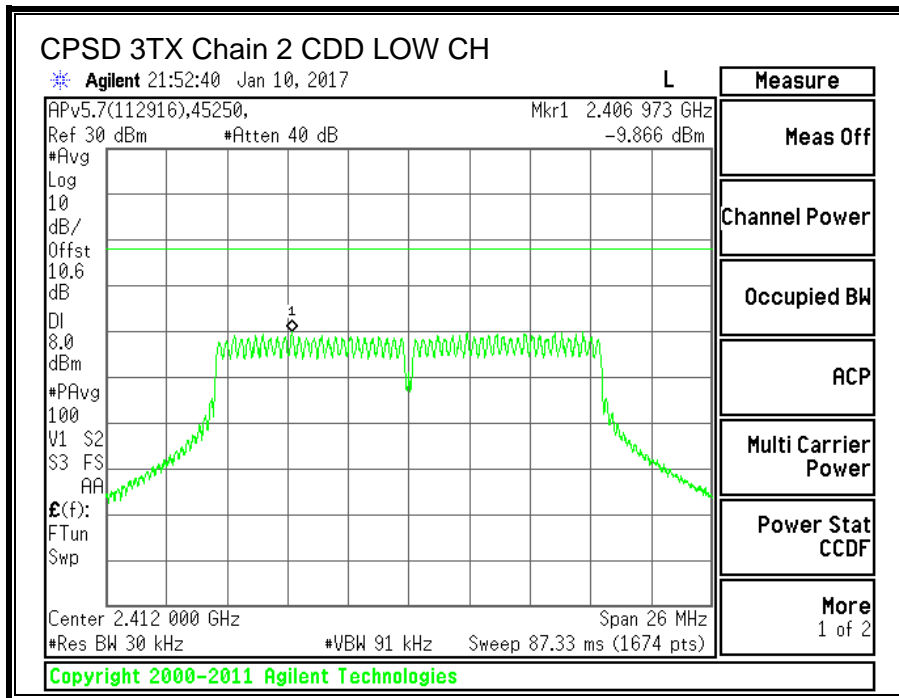


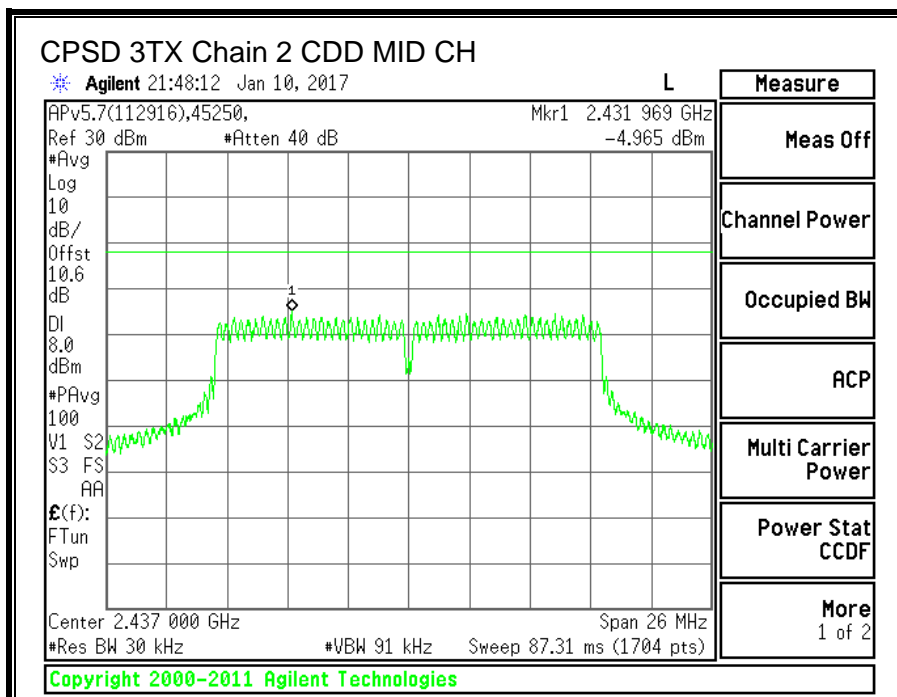
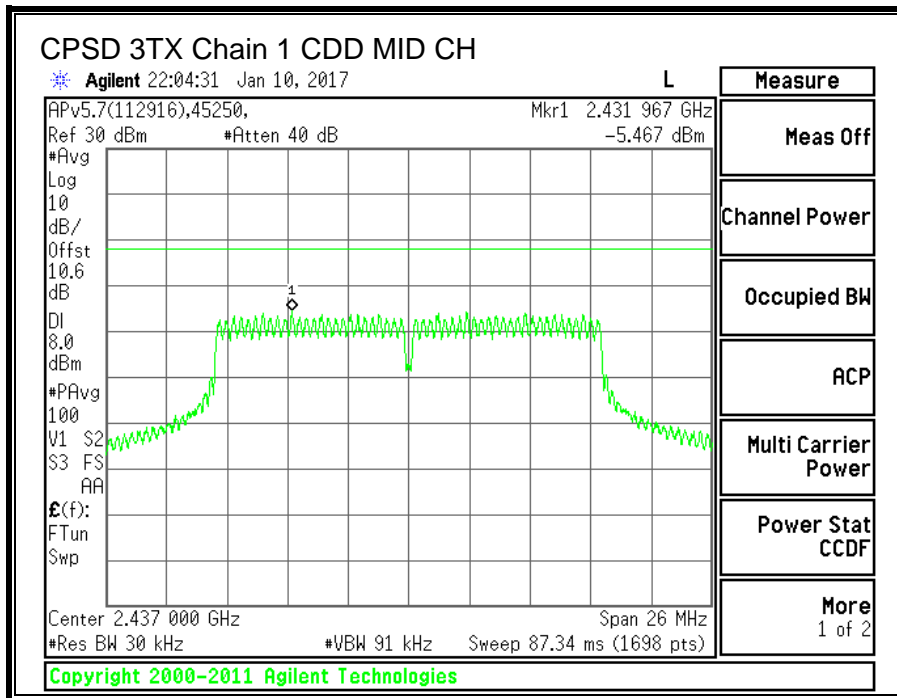


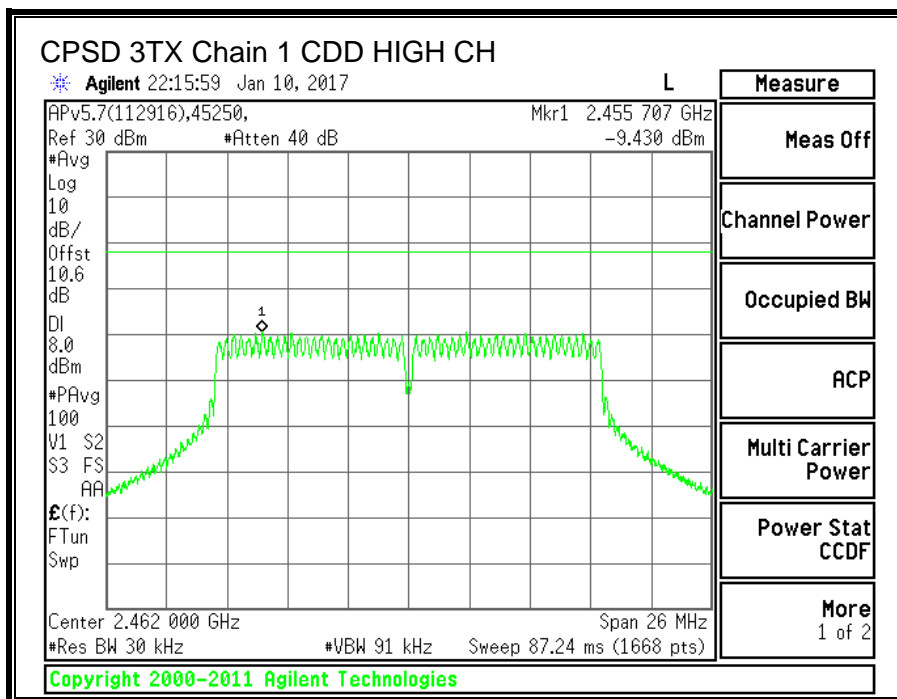
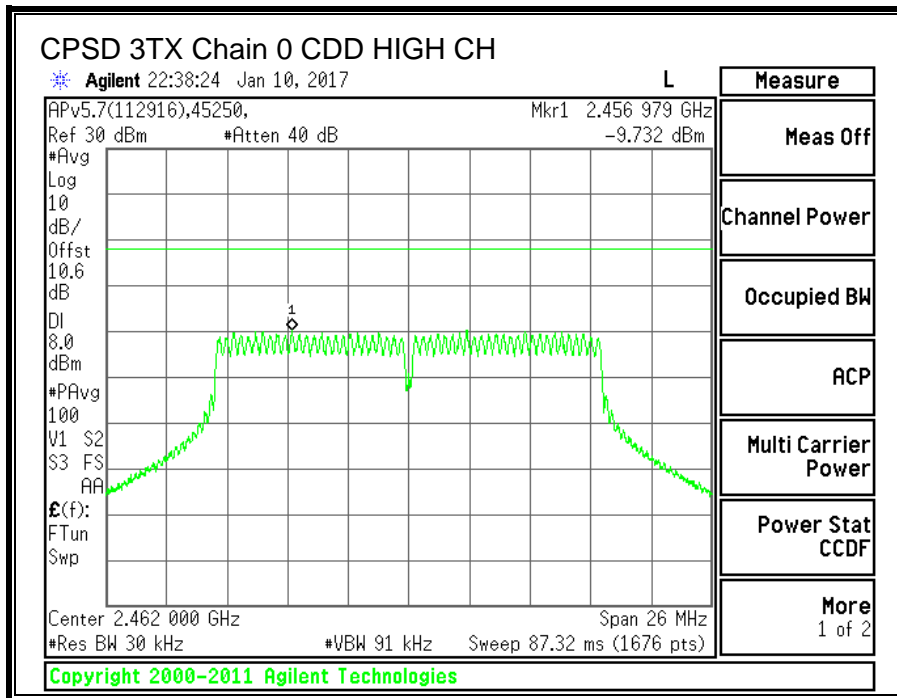



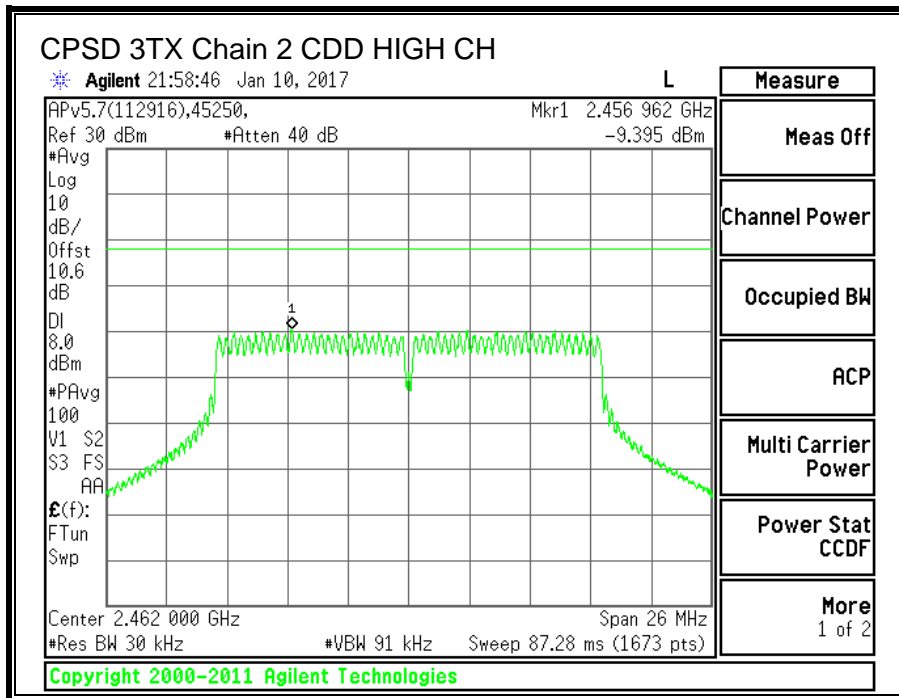




10.2.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

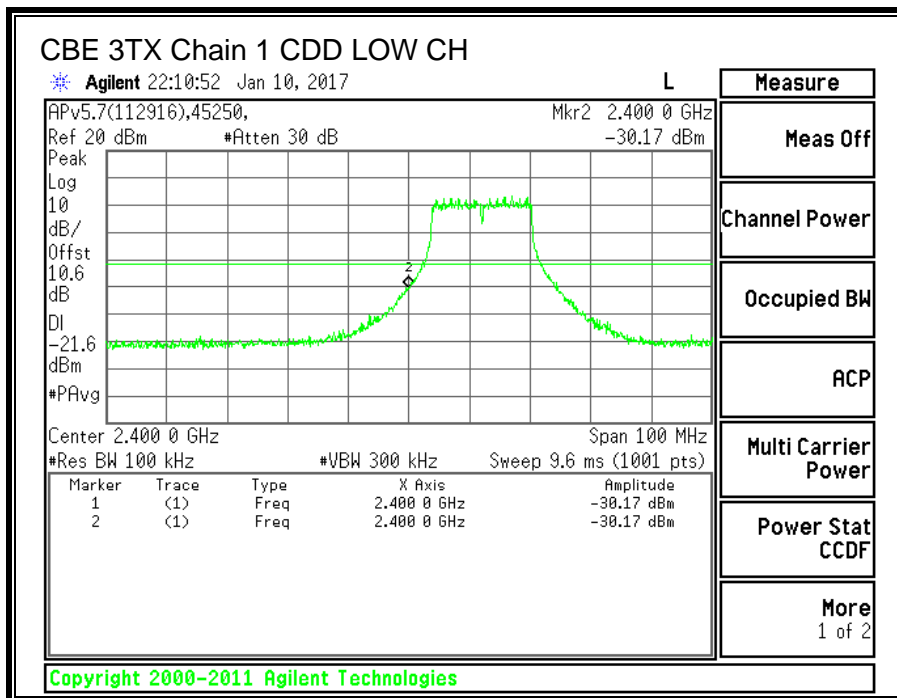
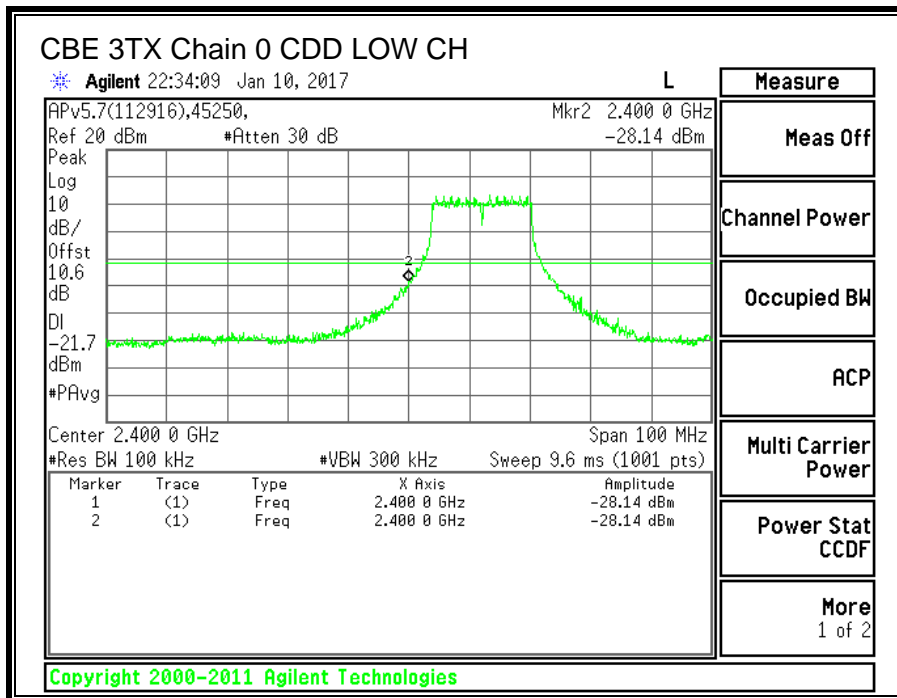


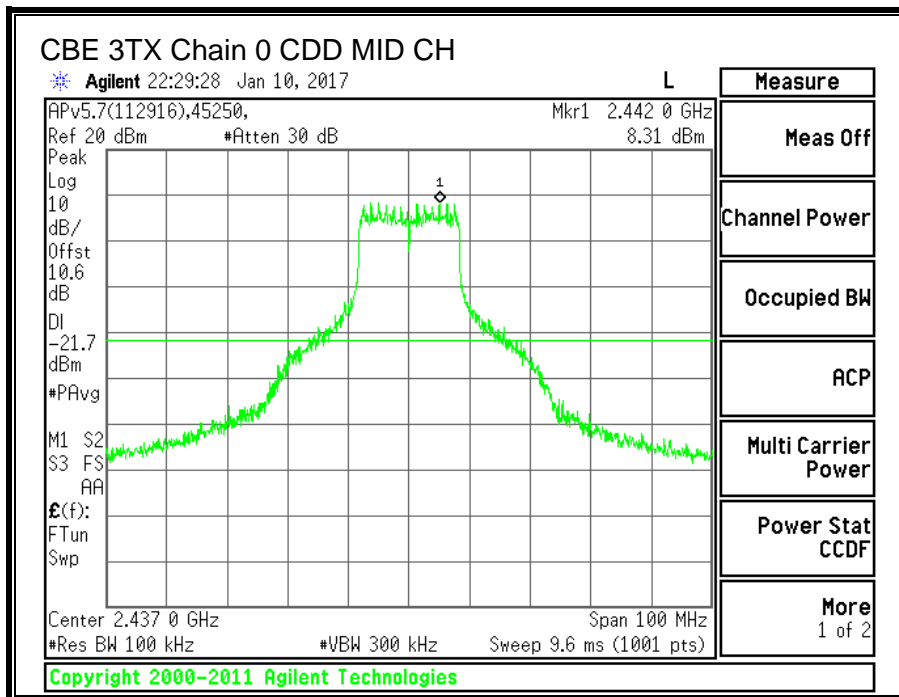
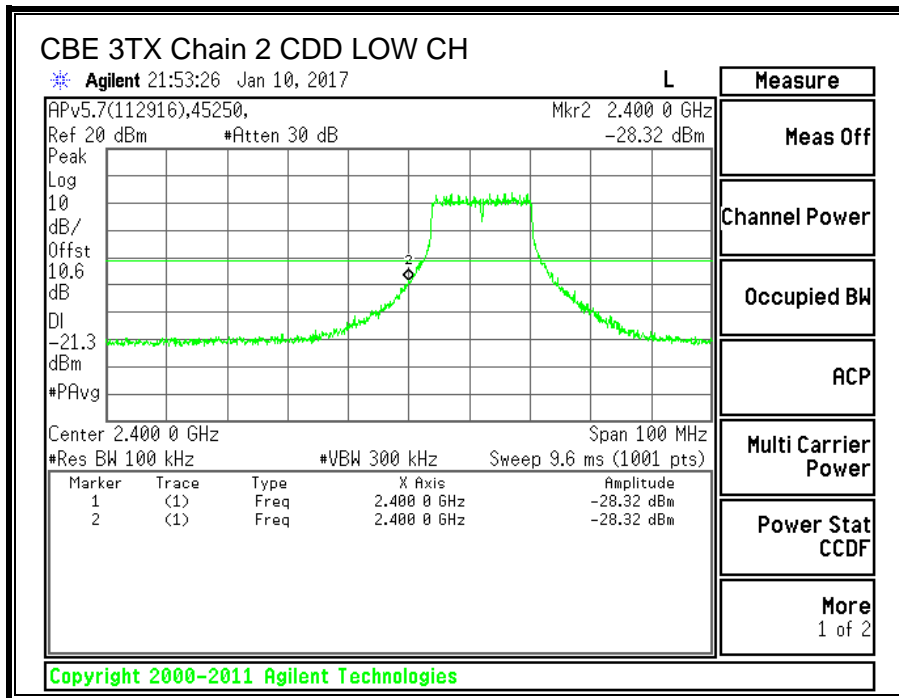


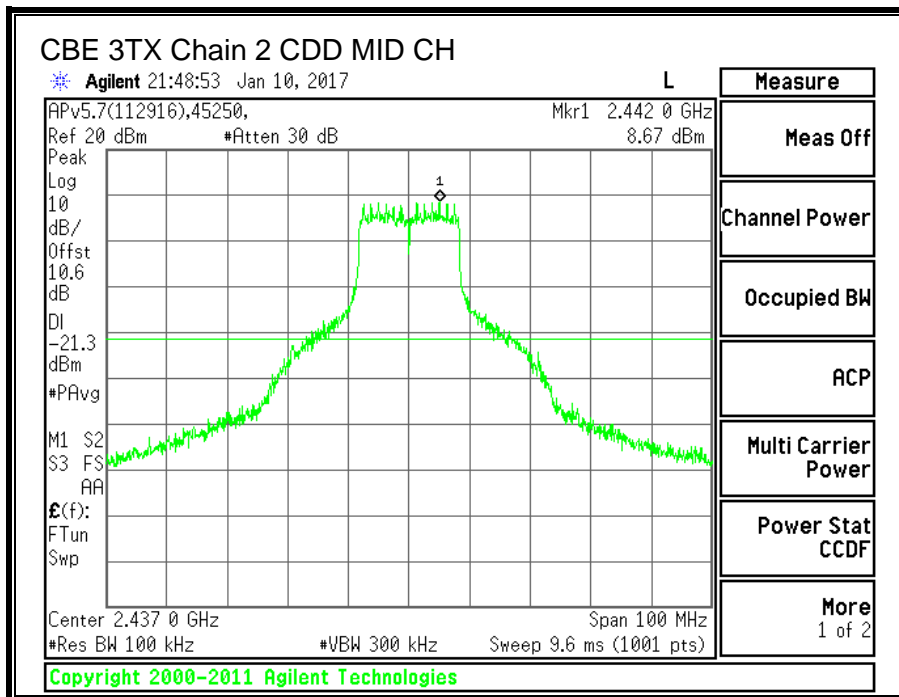
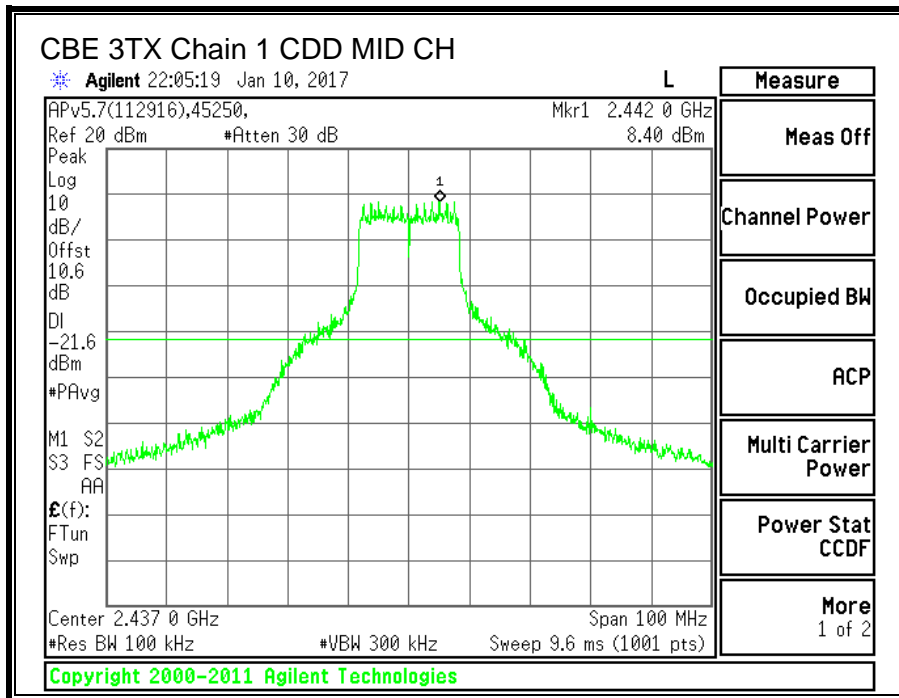


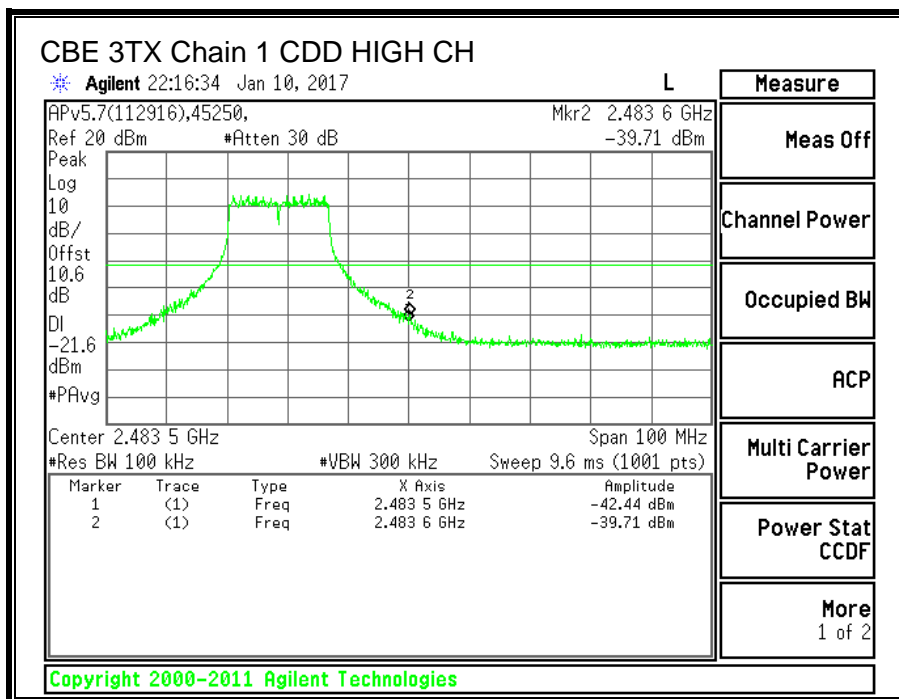
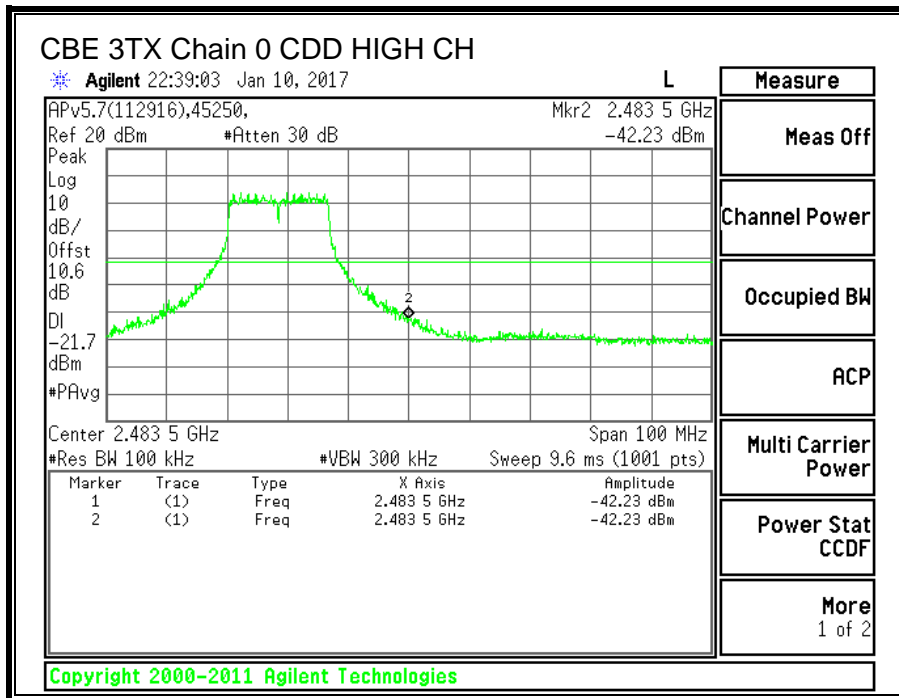


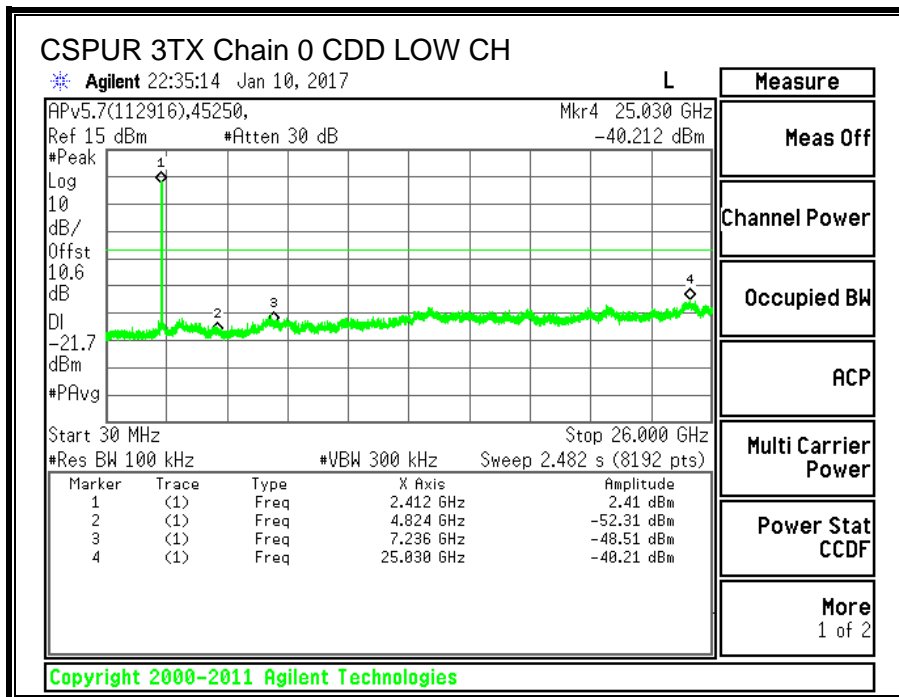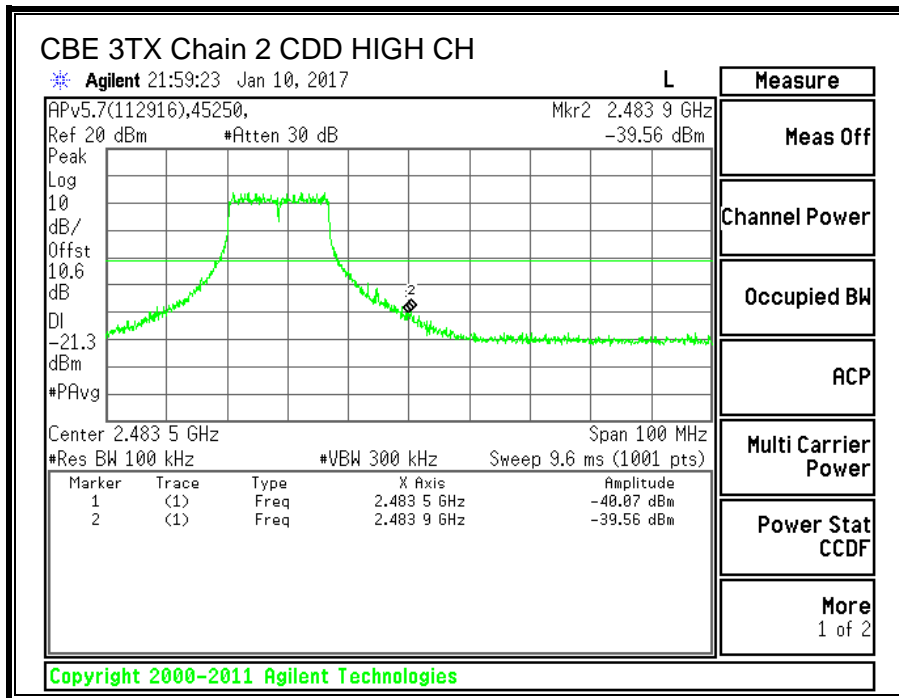

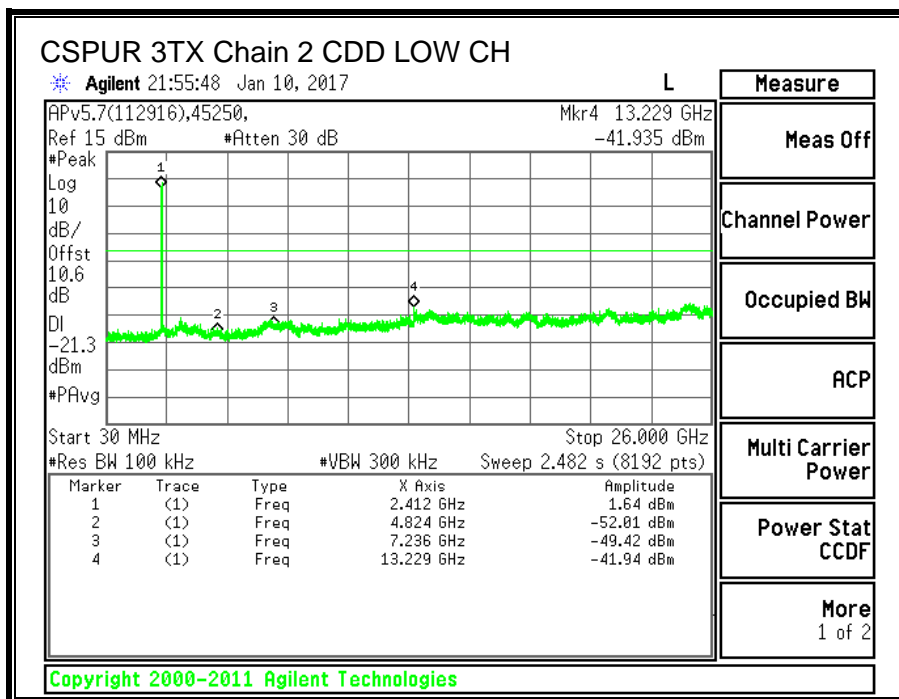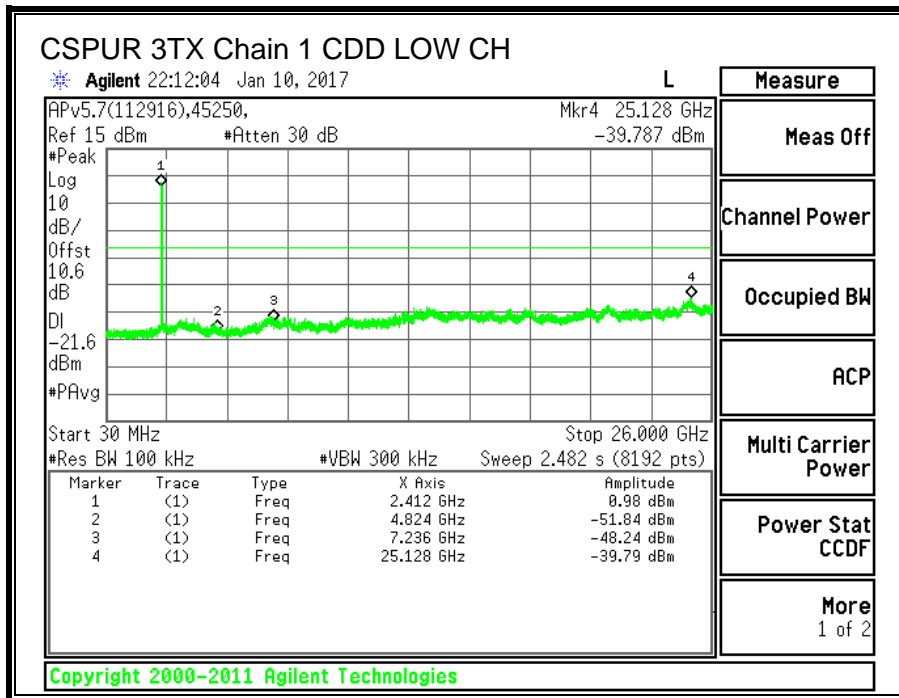

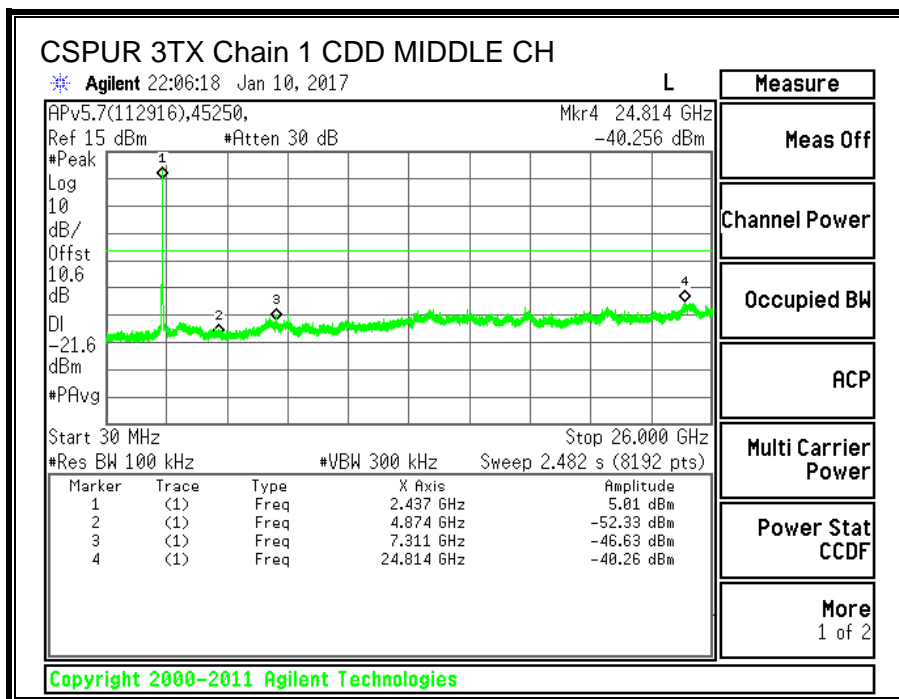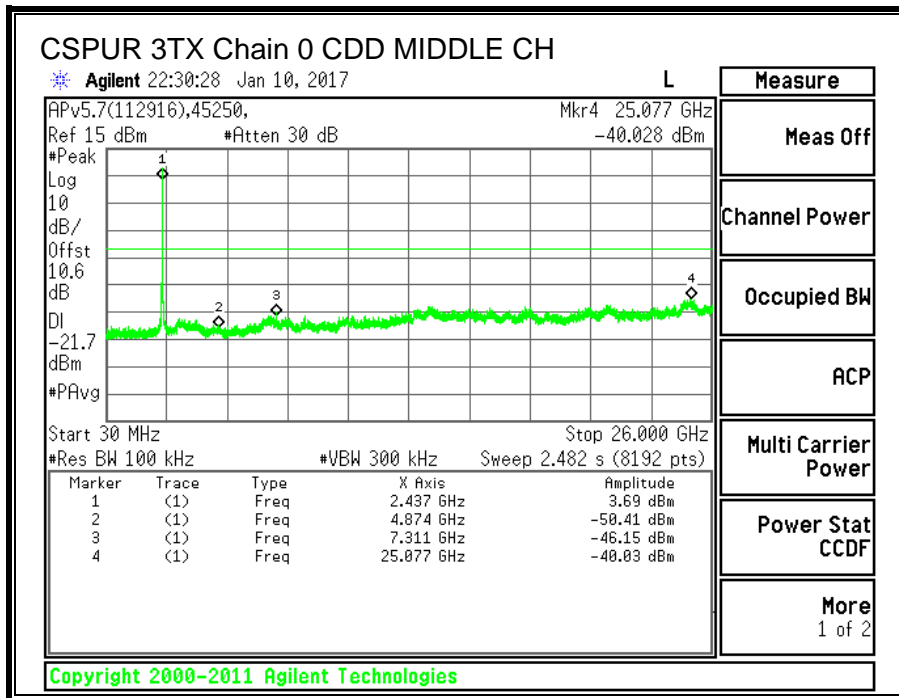

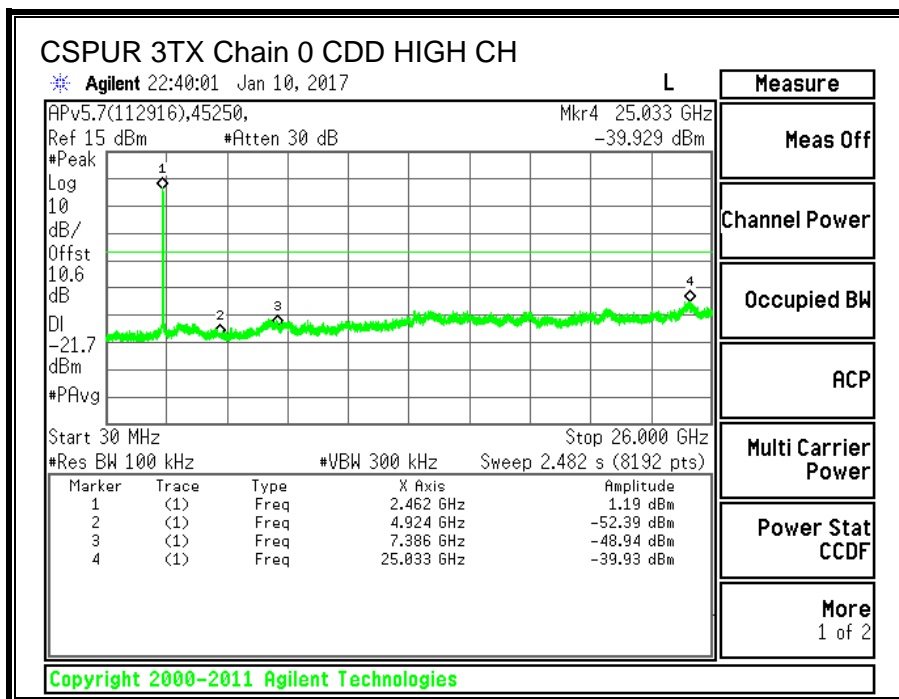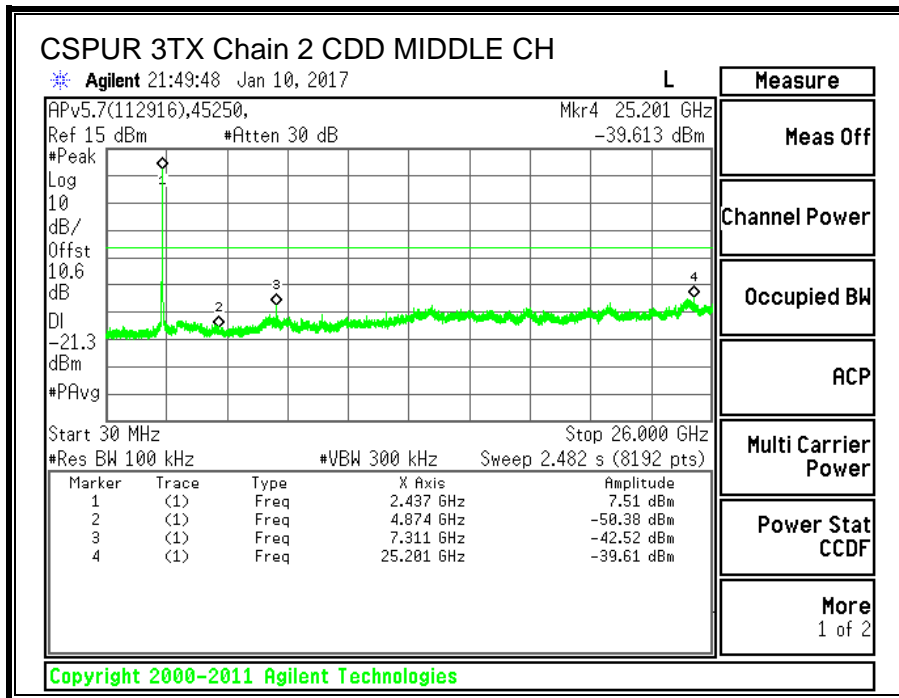

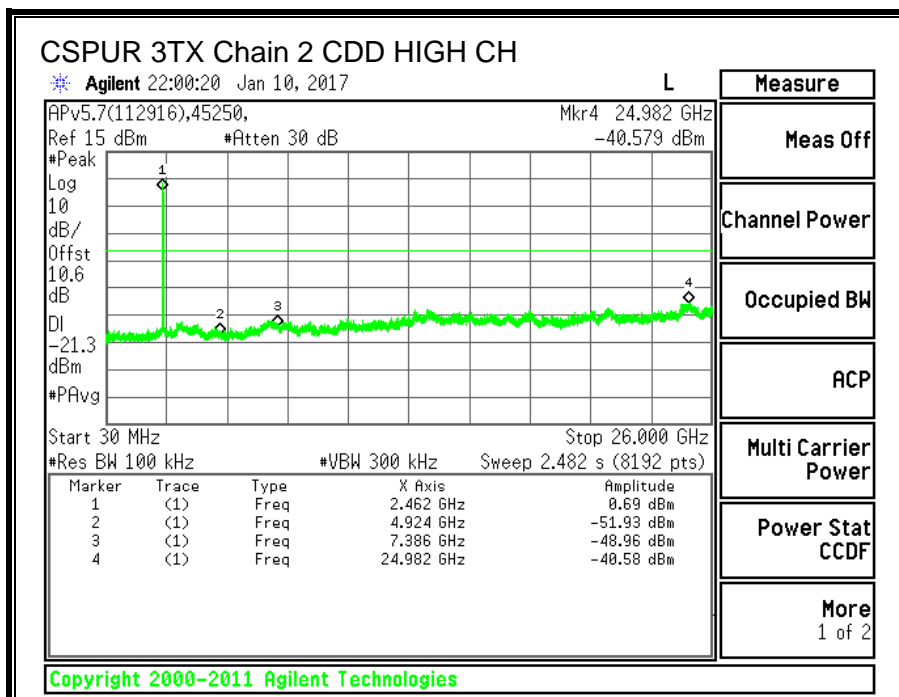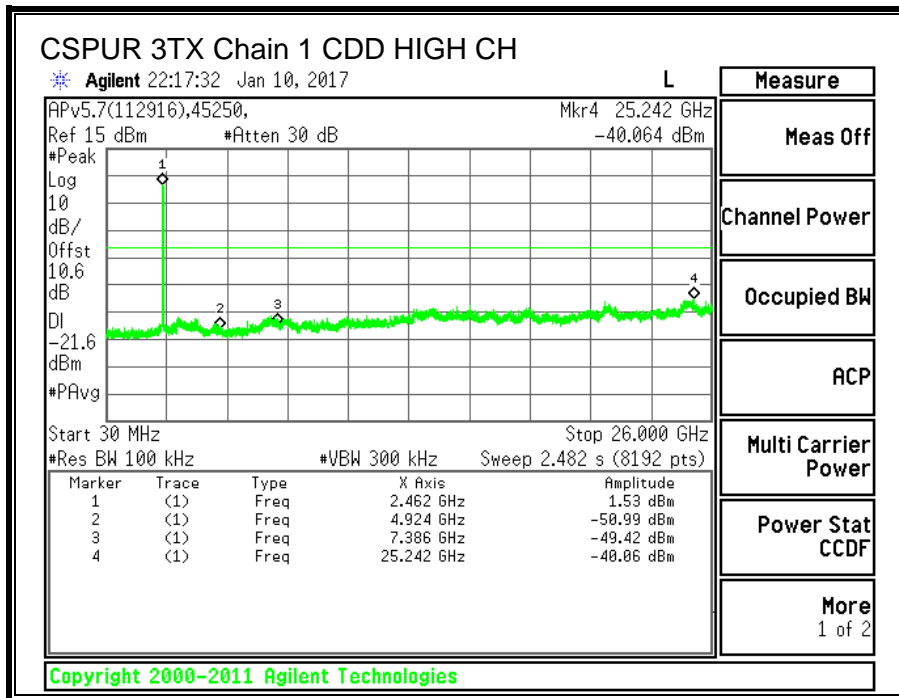

10.3. 11n HT20 3TX CDD MIMO MODE IN THE 2.4GHz BAND

10.3.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-247 (5.2) (1)



The minimum 6 dB bandwidth shall be at least 500 kHz.



TEST PROCEDURE



KDB 58074 D01 v03r05 Section 8.1



RESULTS


| Channel | Frequency | 6 dB BW Chain 0 (MHz) | 6 dB BW Chain 1 (MHz) | 6 dB BW Chain 2 (MHz) | Minimum Limit (MHz) |
|----------|-----------|-----------------------|-----------------------|-----------------------|---------------------|
| Low_1 | 2412 | 17.590 | 17.560 | 17.570 | 0.5 |
| Middle_6 | 2437 | 17.535 | 17.560 | 17.545 | 0.5 |
| High_11 | 2462 | 17.580 | 17.580 | 17.565 | 0.5 |

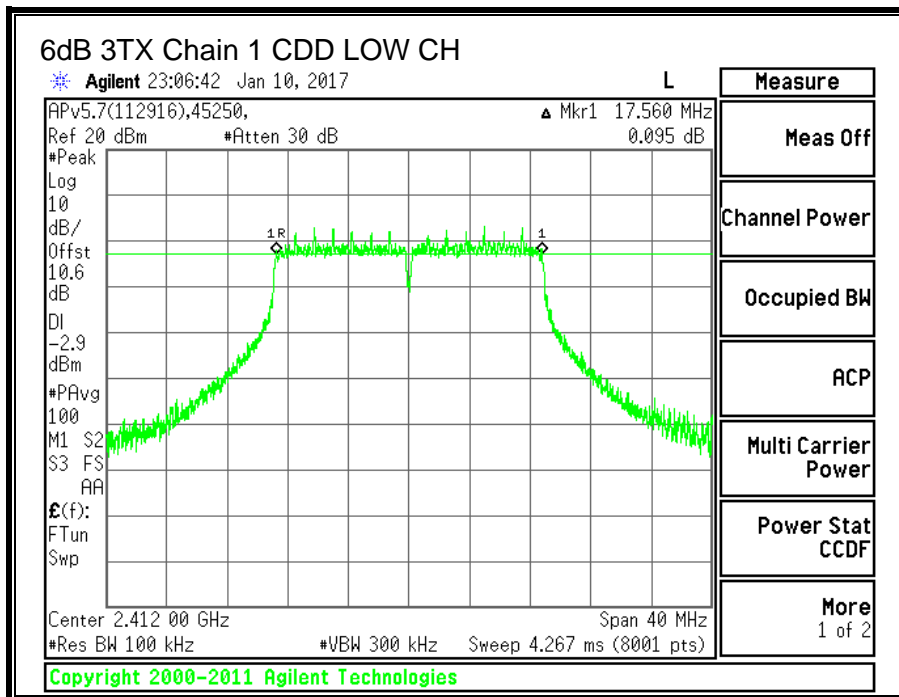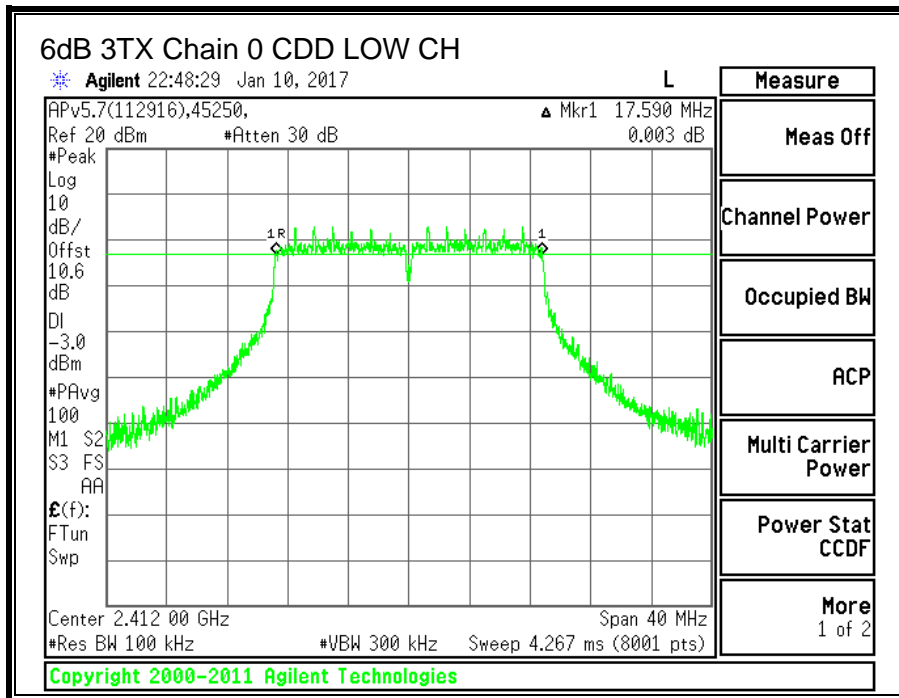

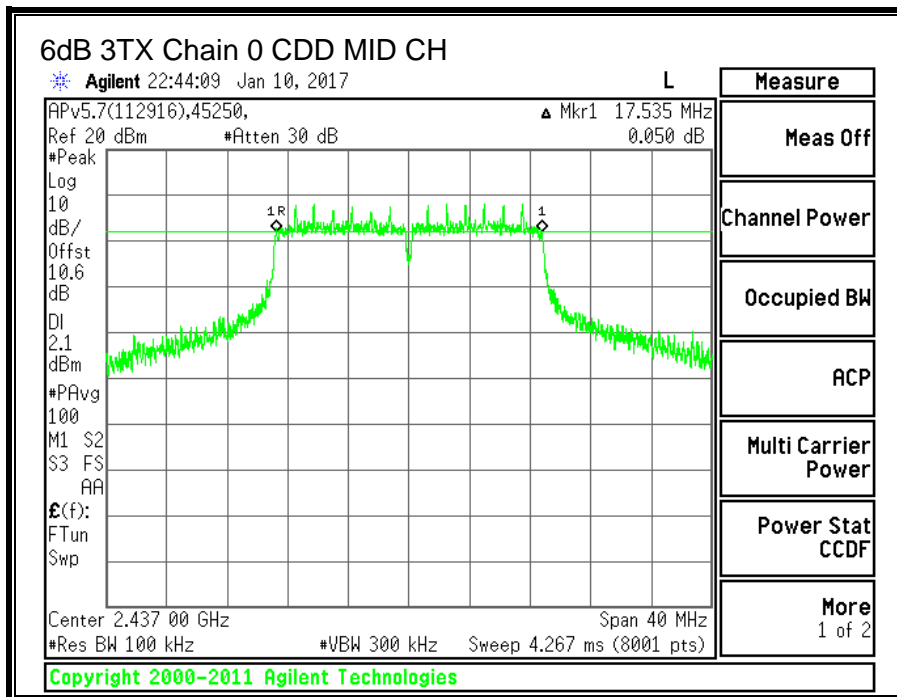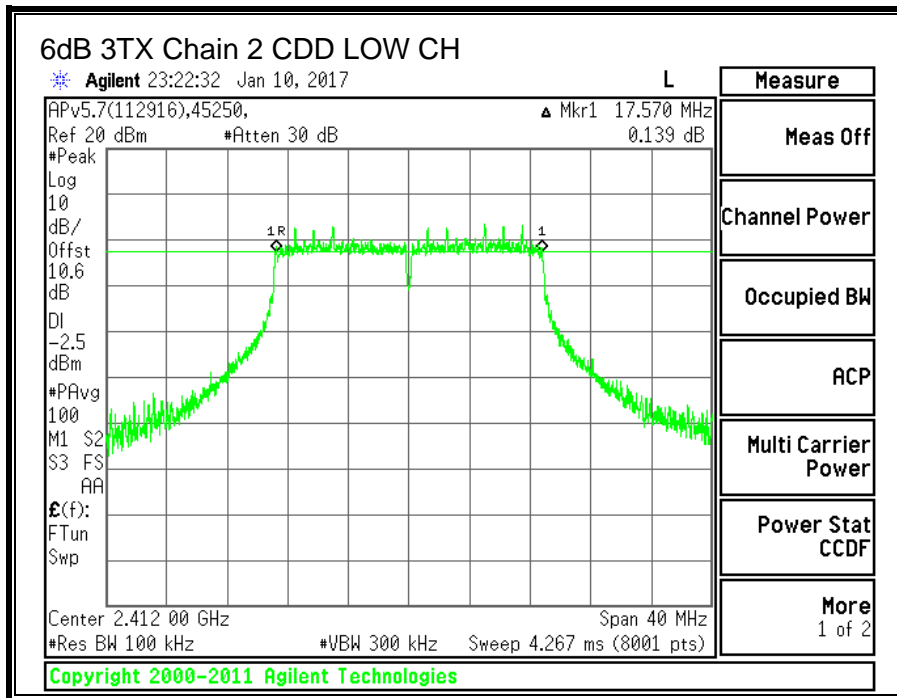

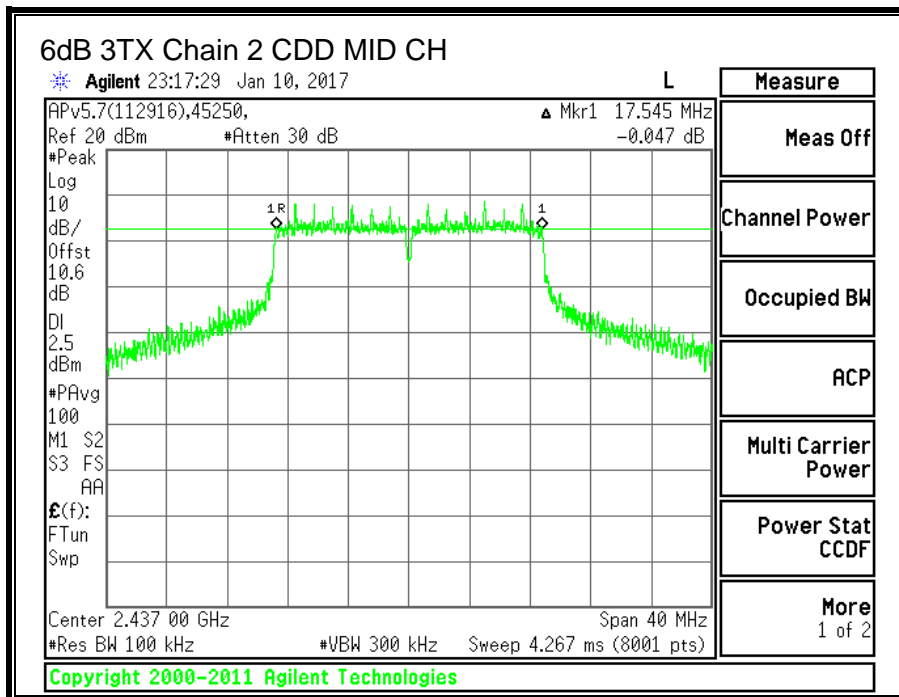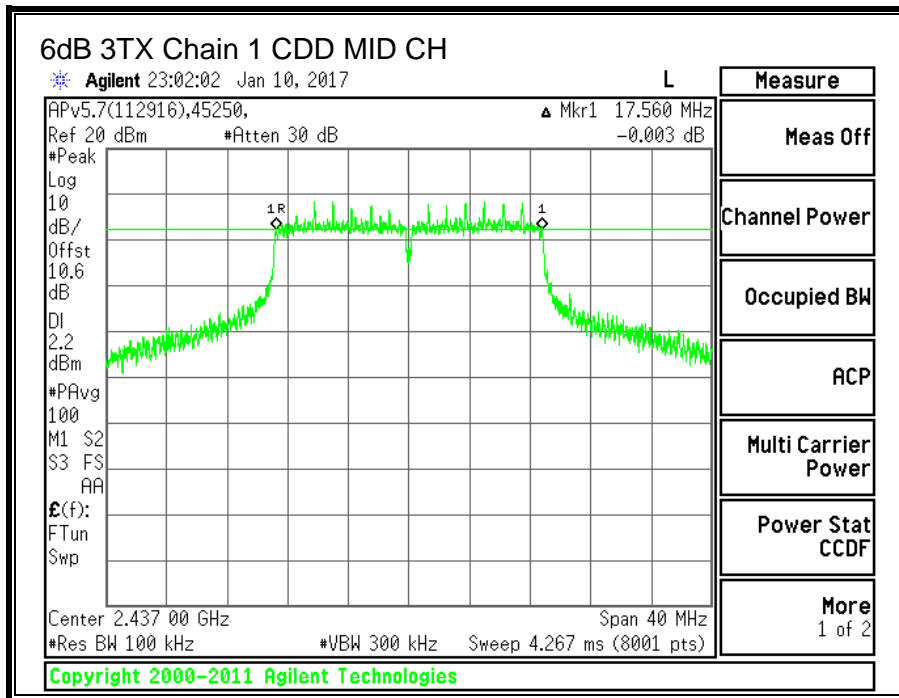

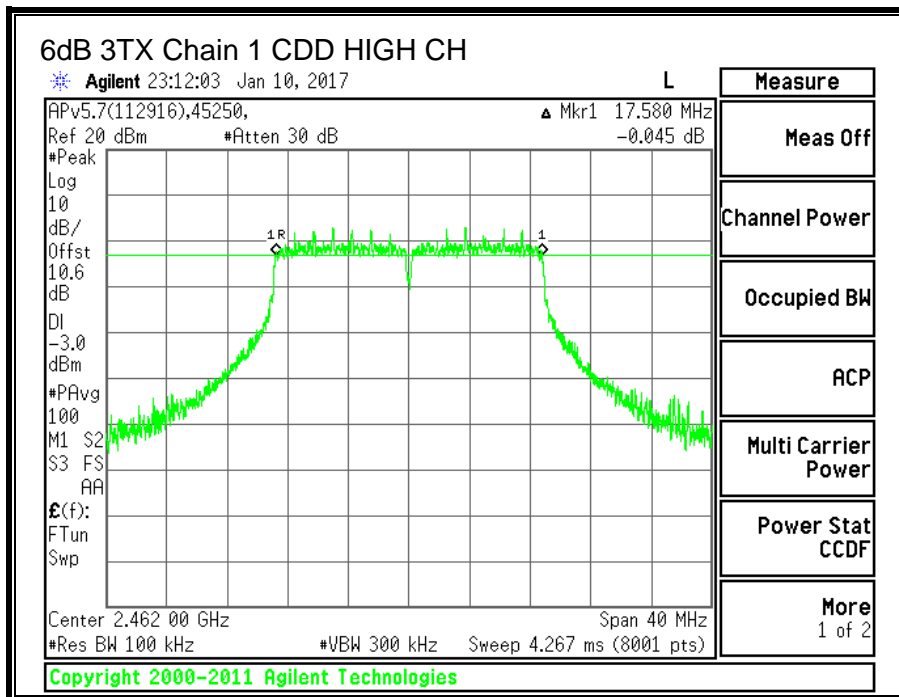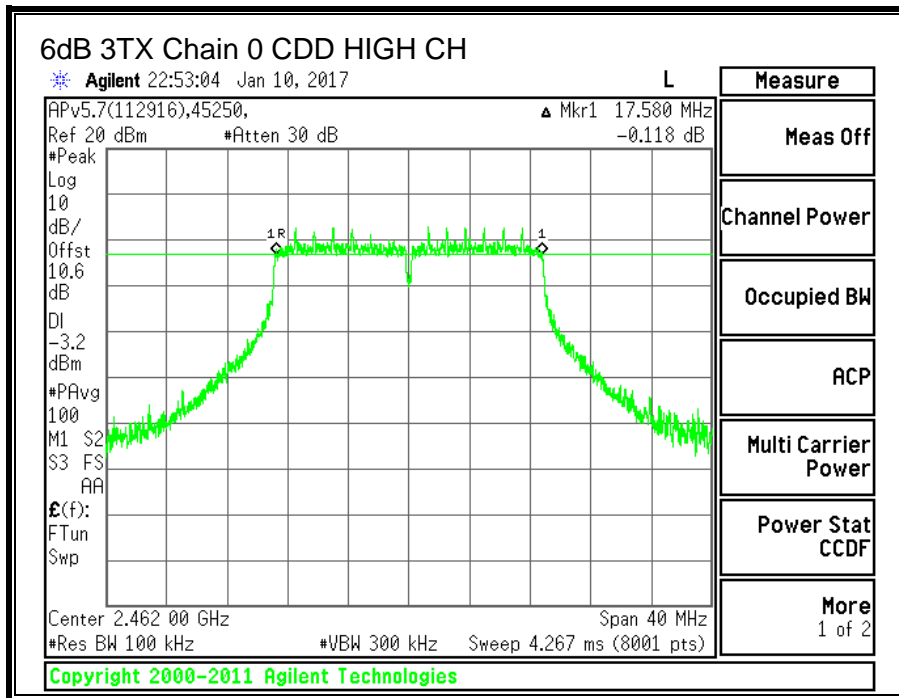

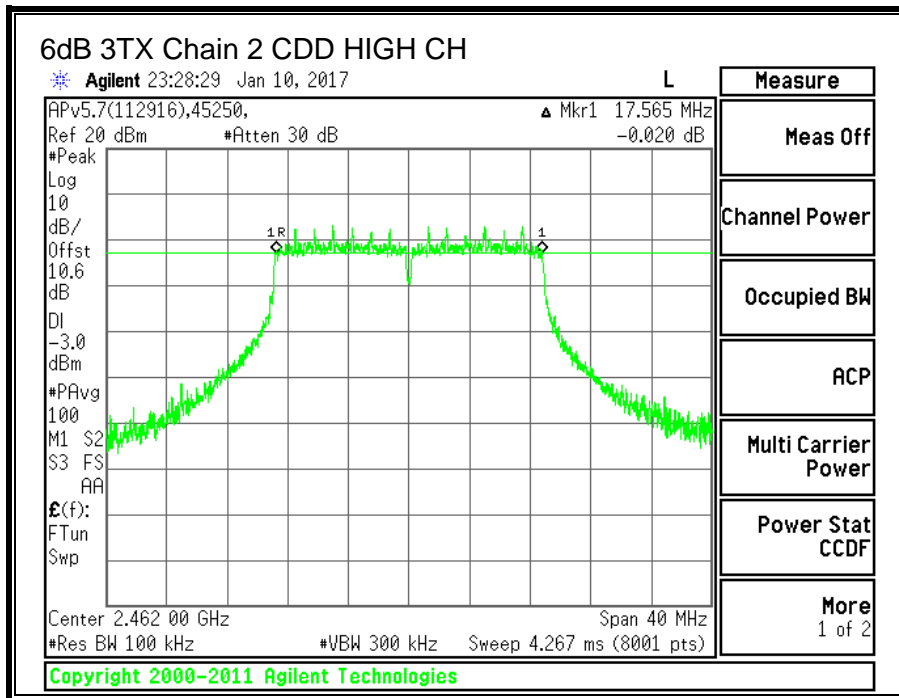

10.3.2. 99% BANDWIDTH

LIMITS



None; for reporting purposes only.



TEST PROCEDURE



ANSI C63.10: 2013 Section 6.9.3



RESULTS


| Channel | Frequency (MHz) | 99% Bandwidth Chain 0 (MHz) | 99% Bandwidth Chain 1 (MHz) | 99% Bandwidth Chain 2 (MHz) |
|----------|-----------------|-----------------------------|-----------------------------|-----------------------------|
| Low_1 | 2412 | 18.0247 | 17.9230 | 17.9751 |
| Middle_6 | 2437 | 18.2539 | 18.3582 | 18.3922 |
| High_11 | 2462 | 18.0001 | 17.9724 | 17.9983 |

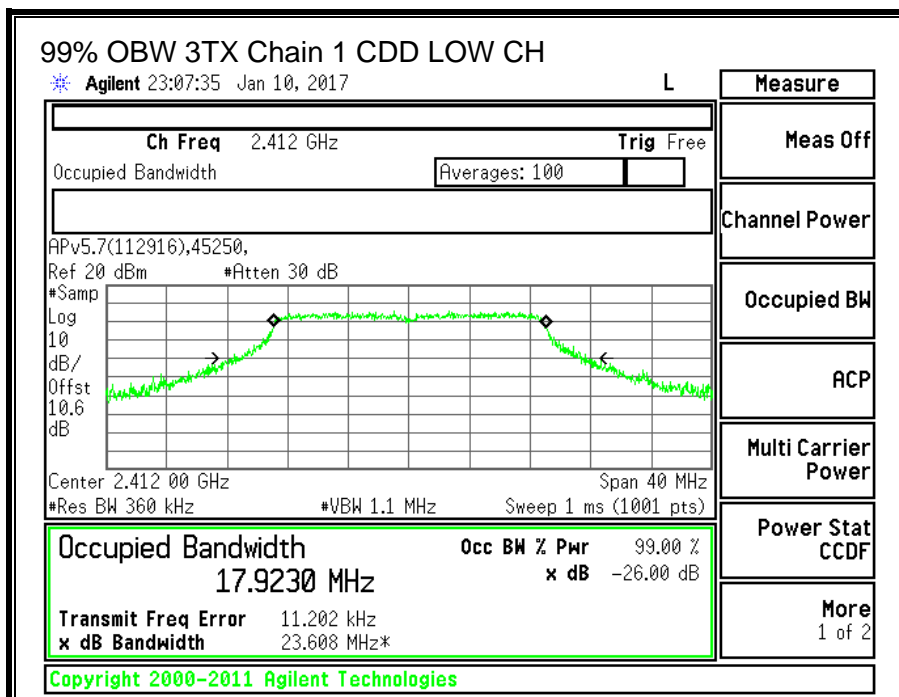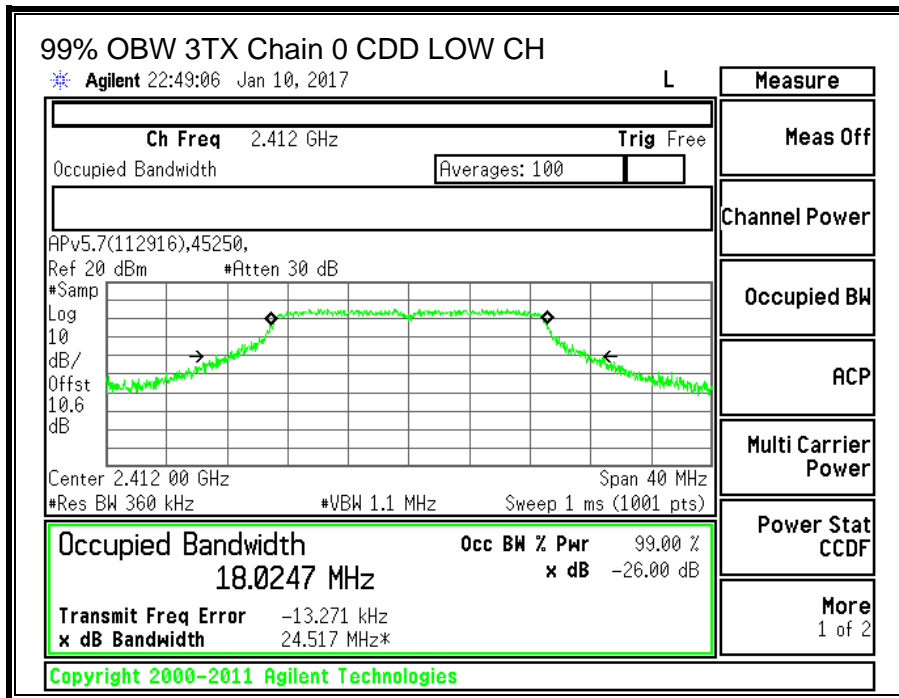

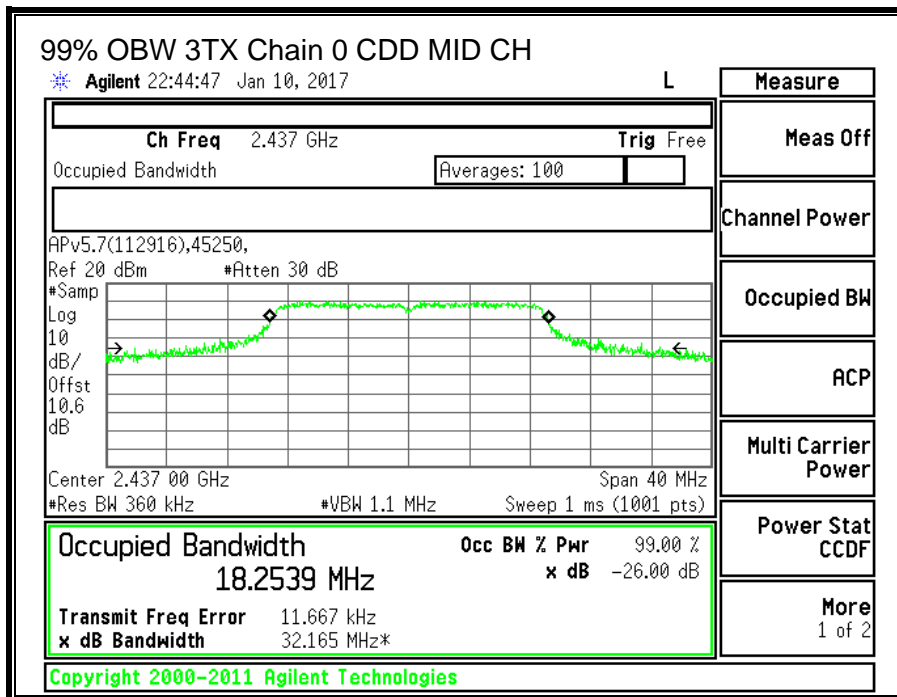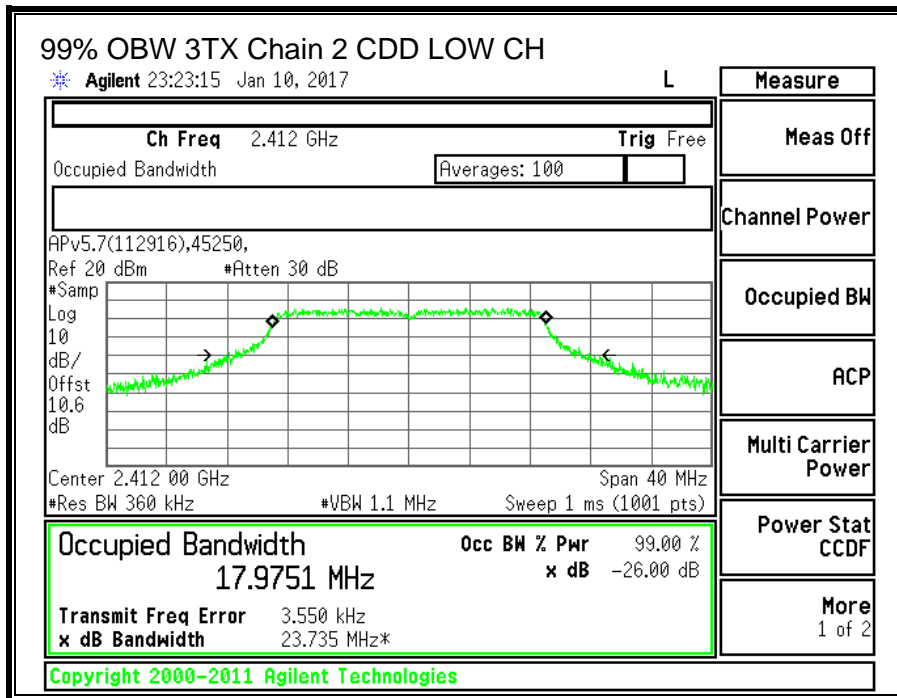

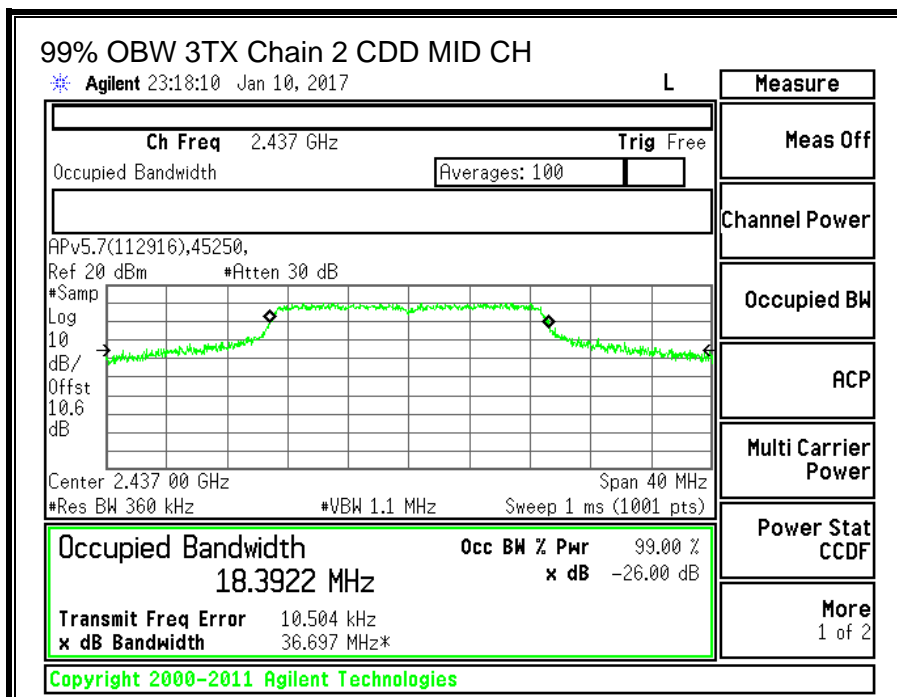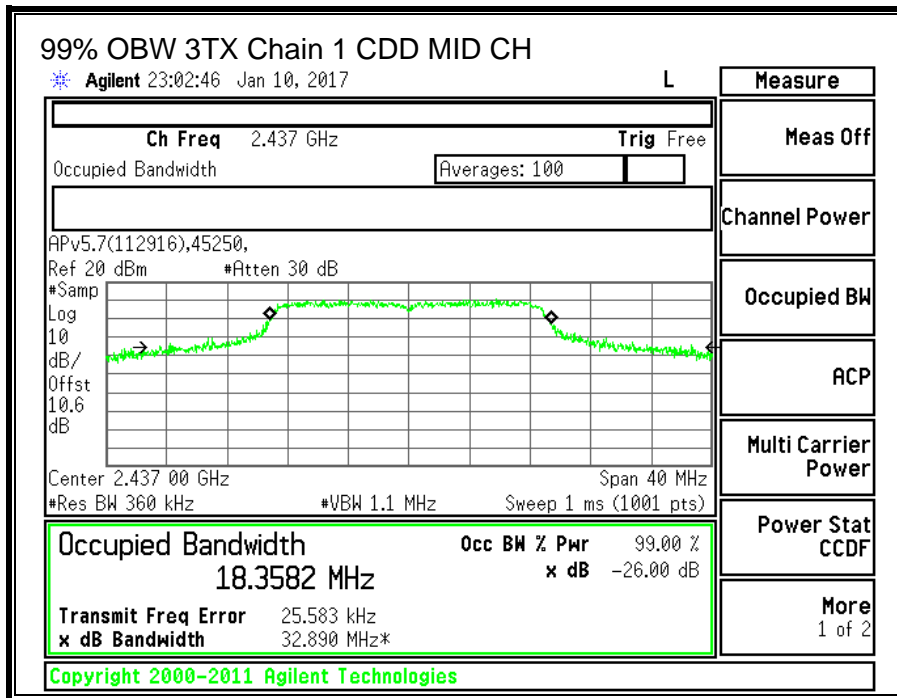

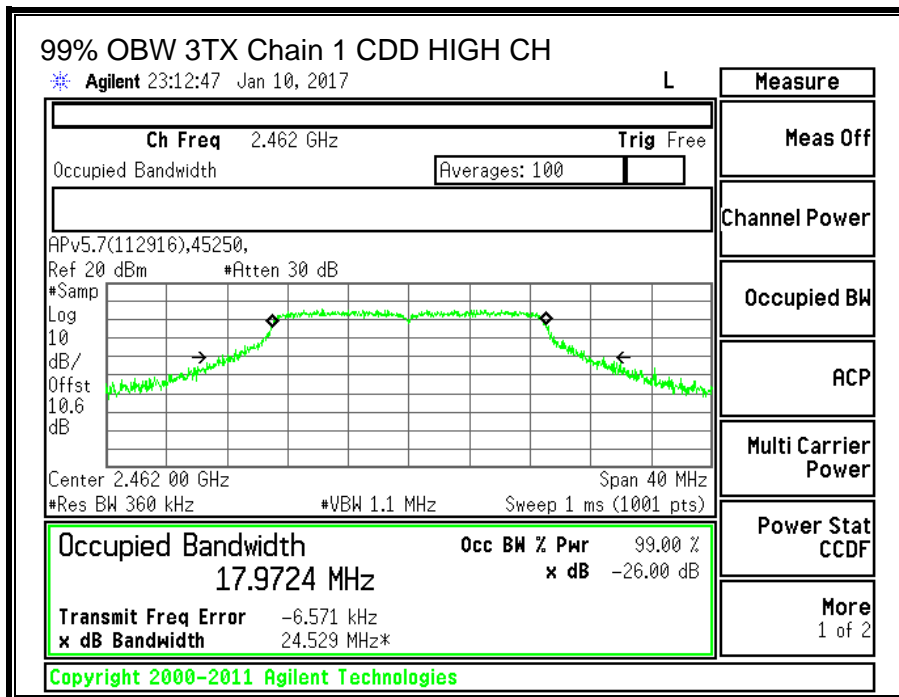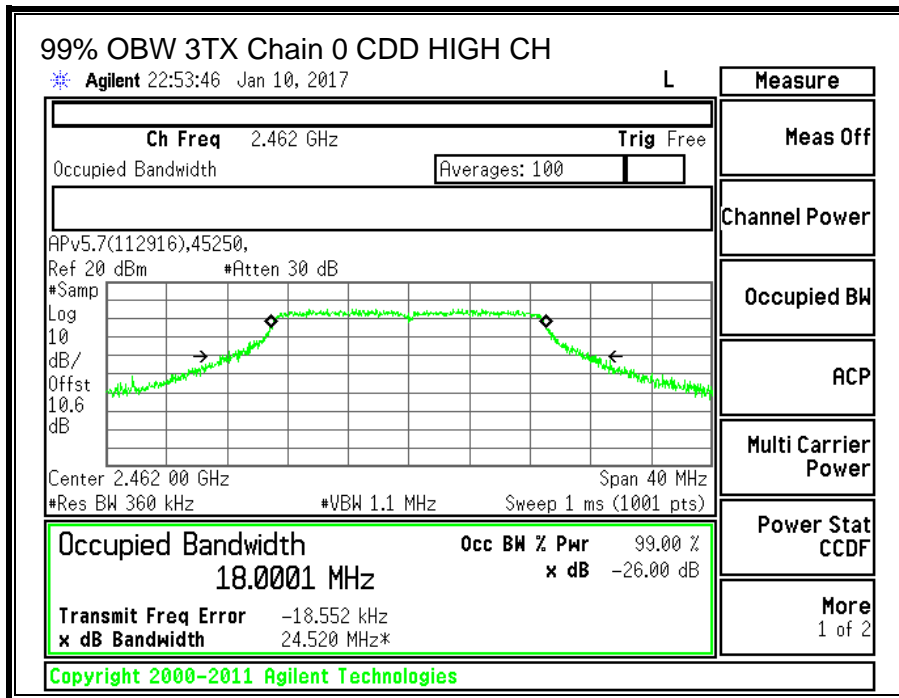

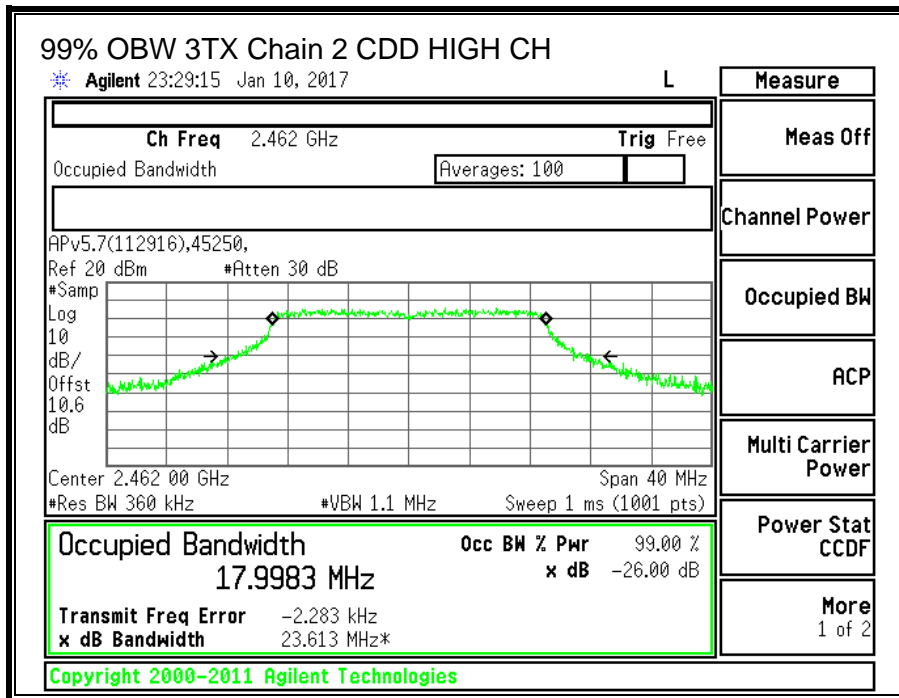

10.3.3. OUTPUT POWER

LIMITS

FCC §15.247

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

Each transmit antenna is driven by only one spatial stream

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

| Chain 0 Gain (dBi) | Chain 1 Gain (dBi) | Chain 2 Gain (dBi) | Correlated Chains Directional Gain (dBi) |
|-----------------------|-----------------------|-----------------------|---|
| 4.3 | 3.5 | 1.6 | 4.3 |

Directional Antenna Gain Calculation: KDB 662911 D01 Section F) 2) f) (ii)

Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain

TEST PROCEDURE

KDB 58074 D01 v03r05 Section 9.2.3.2

RESULTS

| | | | |
|------------|-------|--------------|------------|
| ID: | 45250 | Date: | 01/10/2017 |
|------------|-------|--------------|------------|

Limits

| Channel | Frequency (MHz) | Directional Gain (dBi) | FCC Power Limit (dBm) | IC Power Limit (dBm) | IC EIRP Limit (dBm) | Max Power (dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low | 2412 | 4.30 | 30.00 | 30 | 36 | 30.00 |
| Mid | 2437 | 4.30 | 30.00 | 30 | 36 | 30.00 |
| High | 2462 | 4.30 | 30.00 | 30 | 36 | 30.00 |

Results

| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Chain 1 Meas Power (dBm) | Chain 2 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|----------------|
| Low | 2412 | 14.16 | 14.03 | 14.21 | 18.91 | 30.00 | -11.09 |
| Mid | 2437 | 18.95 | 19.07 | 19.10 | 23.81 | 30.00 | -6.19 |
| High | 2462 | 14.17 | 14.32 | 14.25 | 19.02 | 30.00 | -10.98 |

Note: the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

10.3.4. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.



TEST PROCEDURE



KDB 58074 D01 v03r05 Section 10.3



RESULTS



| Duty Cycle CF (dB) | 0.115 | Included in Calculations of Corr'd PSD | | | | | |
|--------------------|-----------------|--|--------------------|--------------------|------------------------|-------------|-------------|
| PSD Results | | | | | | | |
| Channel | Frequency (MHz) | Chain 0 Meas (dBm) | Chain 1 Meas (dBm) | Chain 2 Meas (dBm) | Total Corr'd PSD (dBm) | Limit (dBm) | Margin (dB) |
| Low | 2412 | -10.93 | -10.76 | -10.61 | -5.88 | 8.0 | -13.9 |
| Mid | 2437 | -5.69 | -6.14 | -6.37 | -1.17 | 8.0 | -9.2 |
| High | 2462 | -10.86 | -10.51 | -11.12 | -5.94 | 8.0 | -13.9 |


Correlated PSD Calculation Method: KDB 662911 D01 Section E) 2) c)

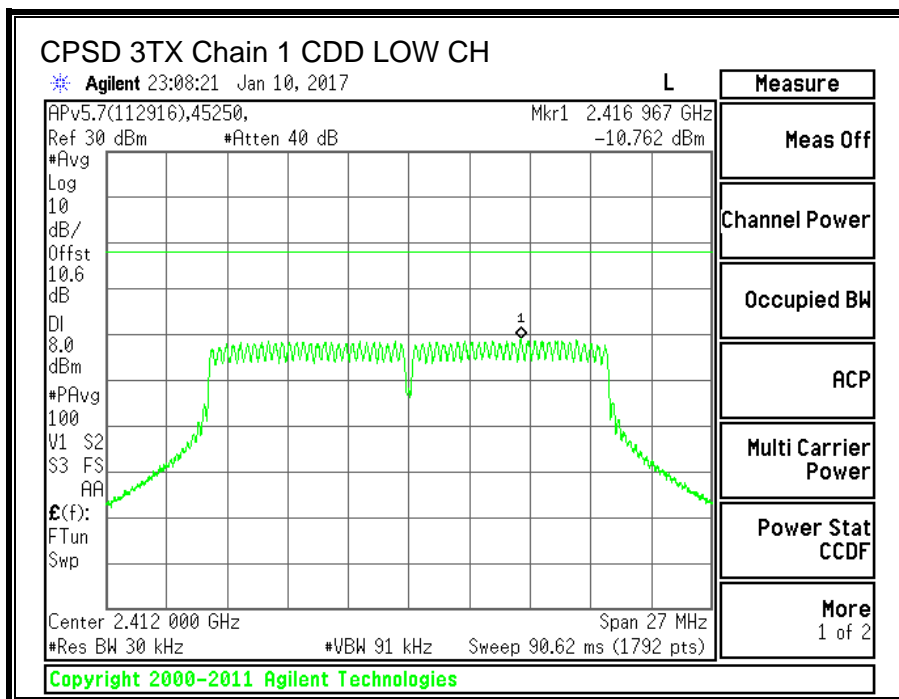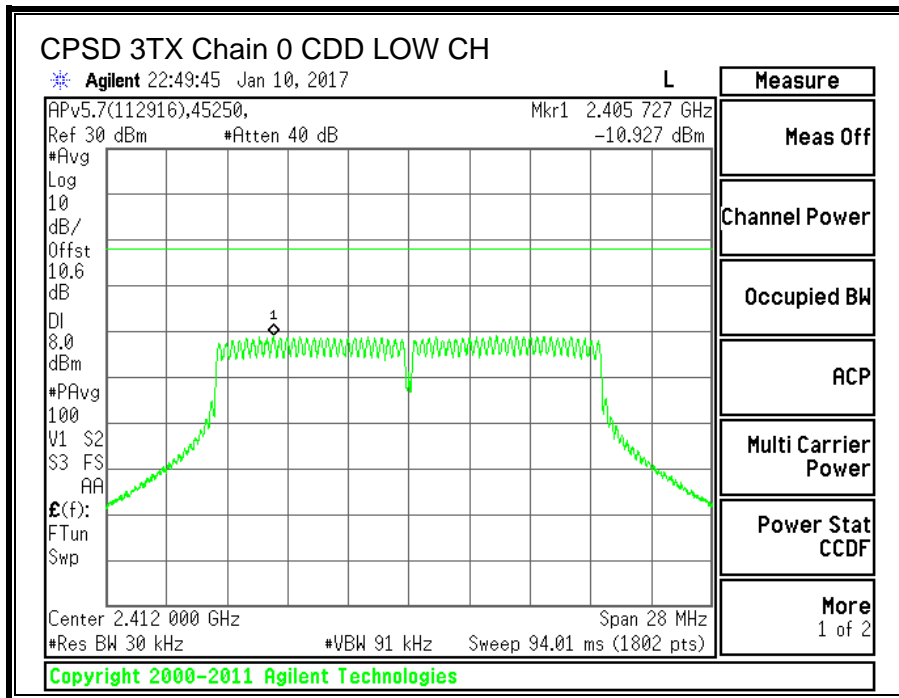

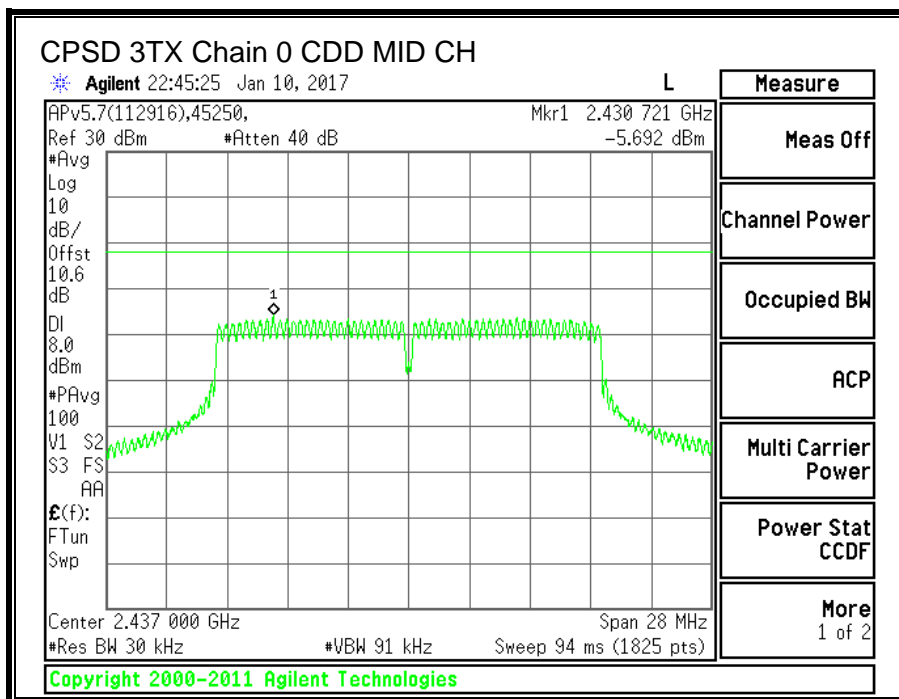
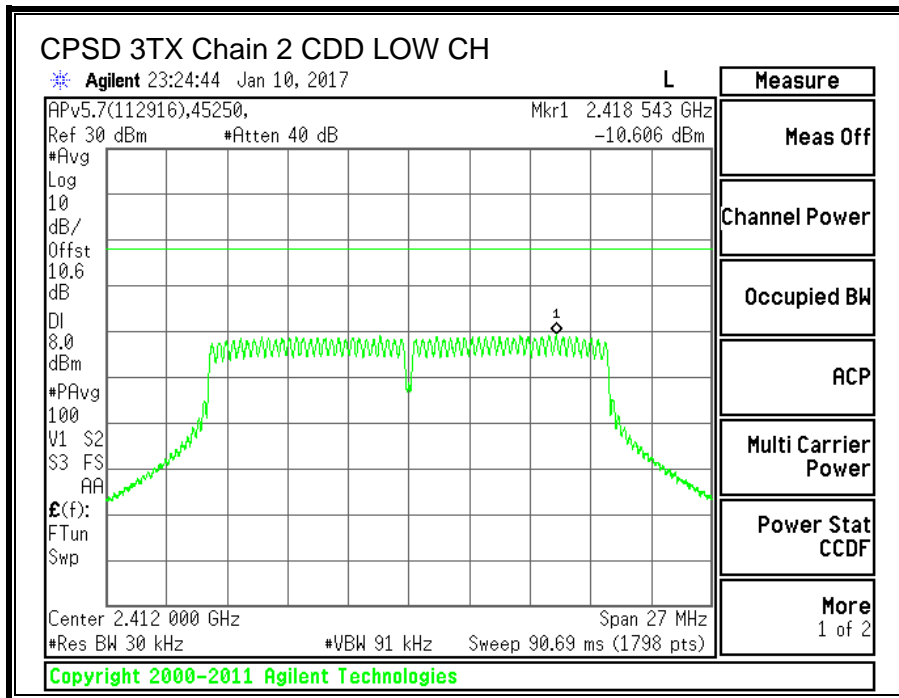


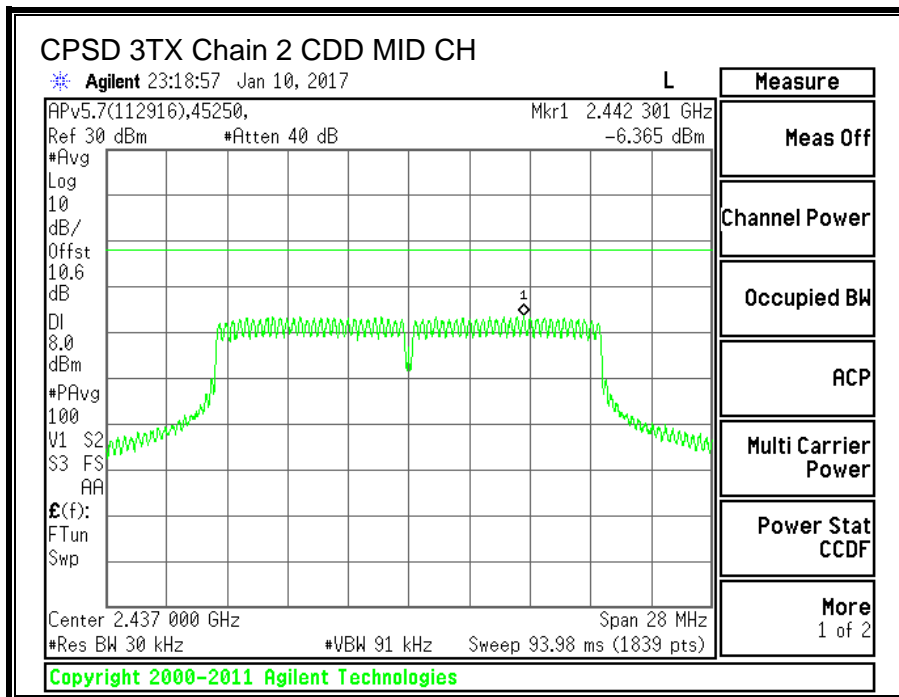
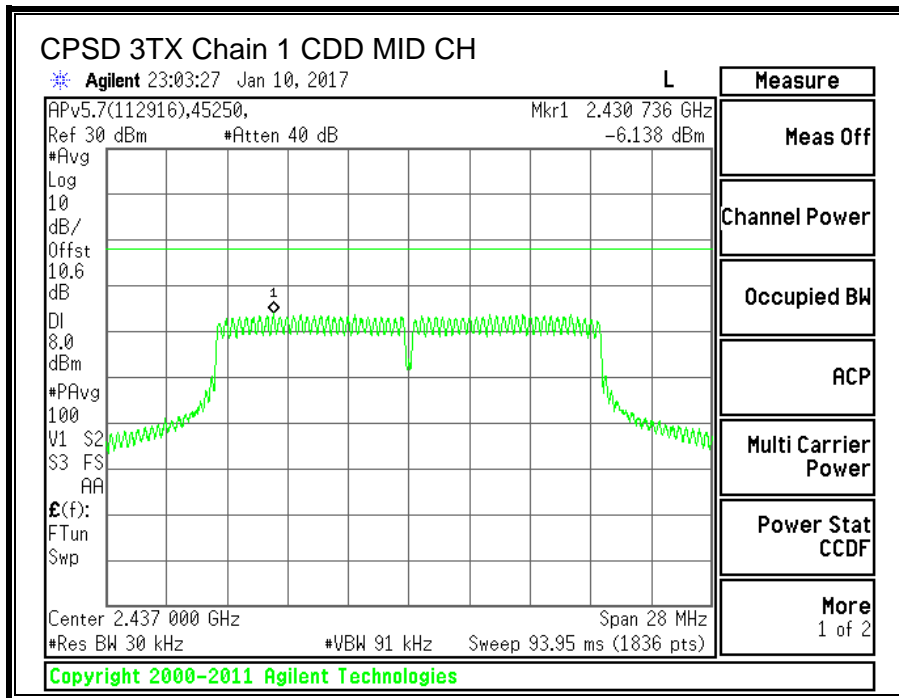


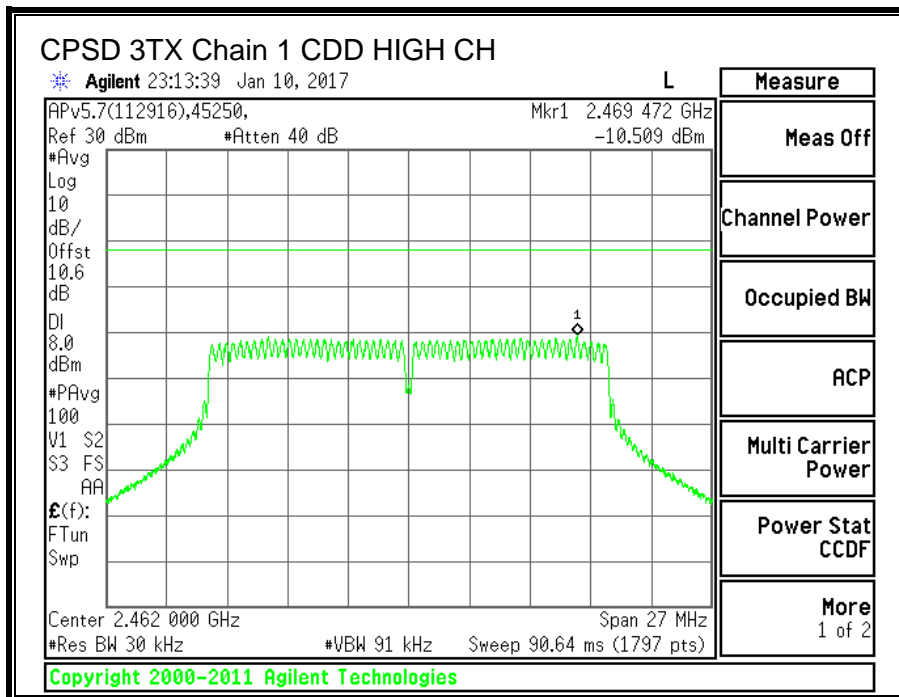
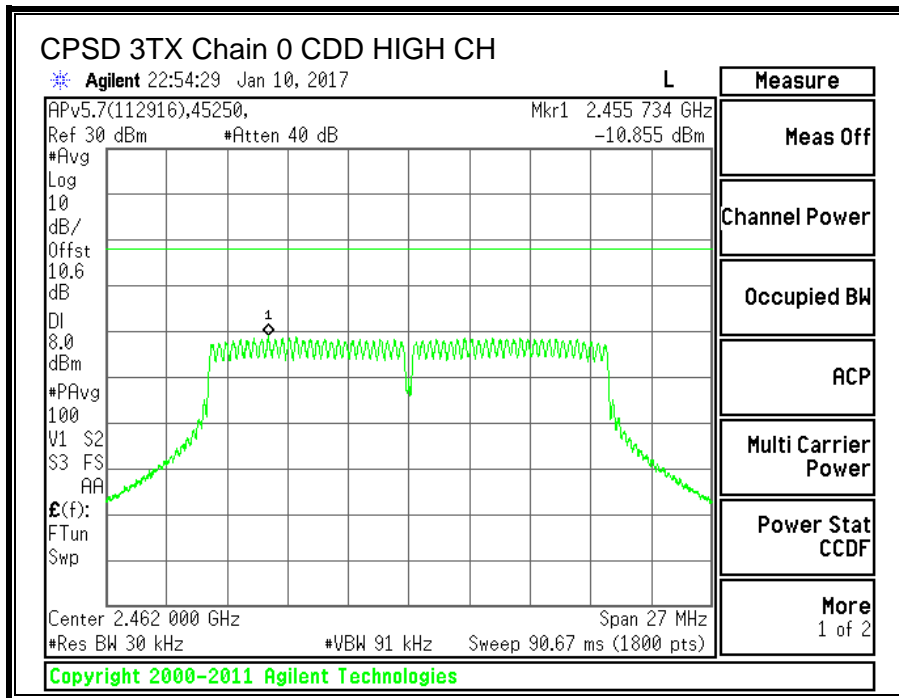



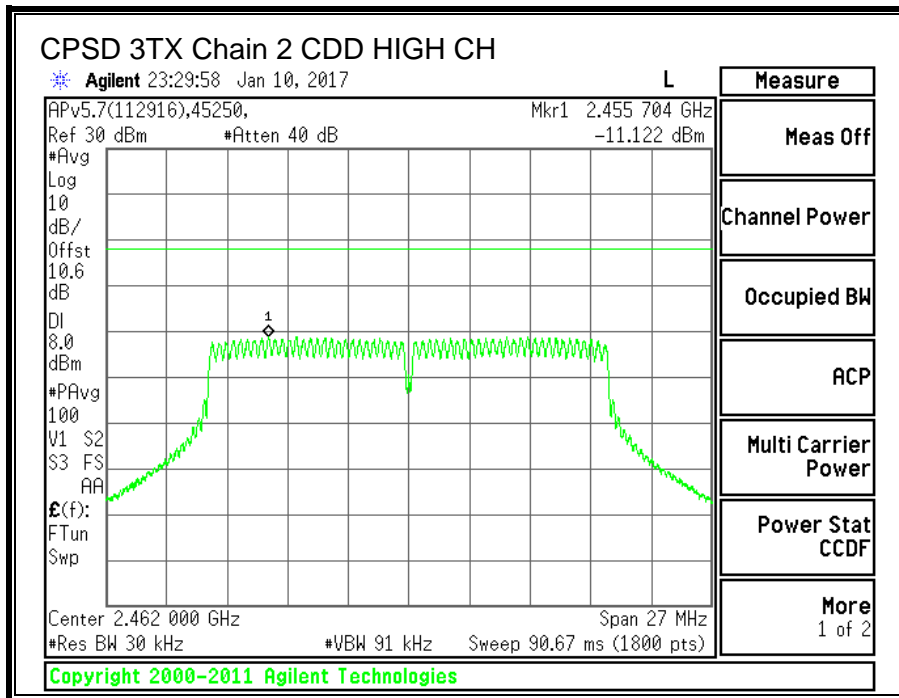




10.3.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

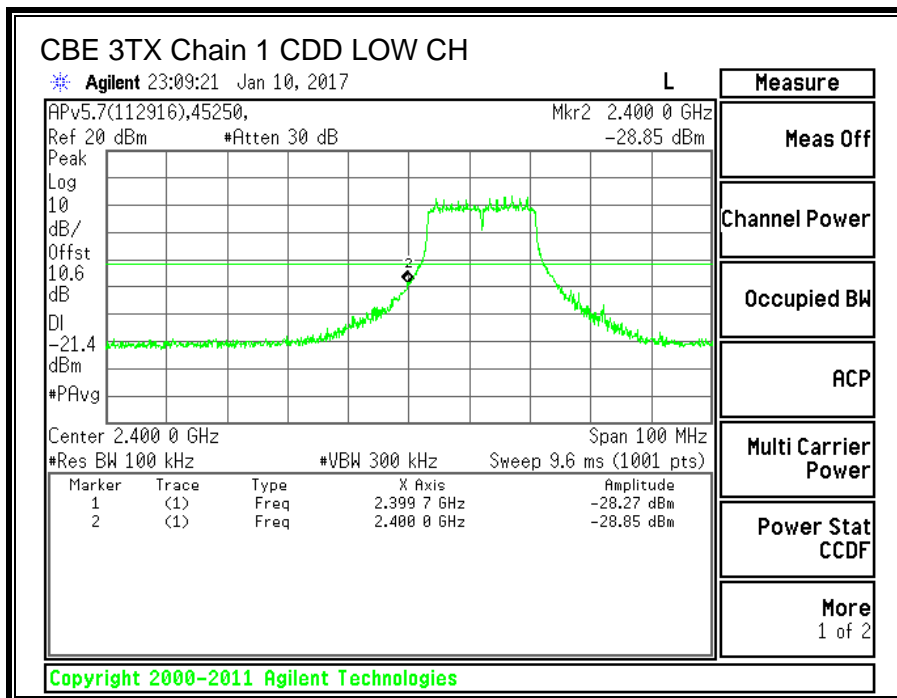
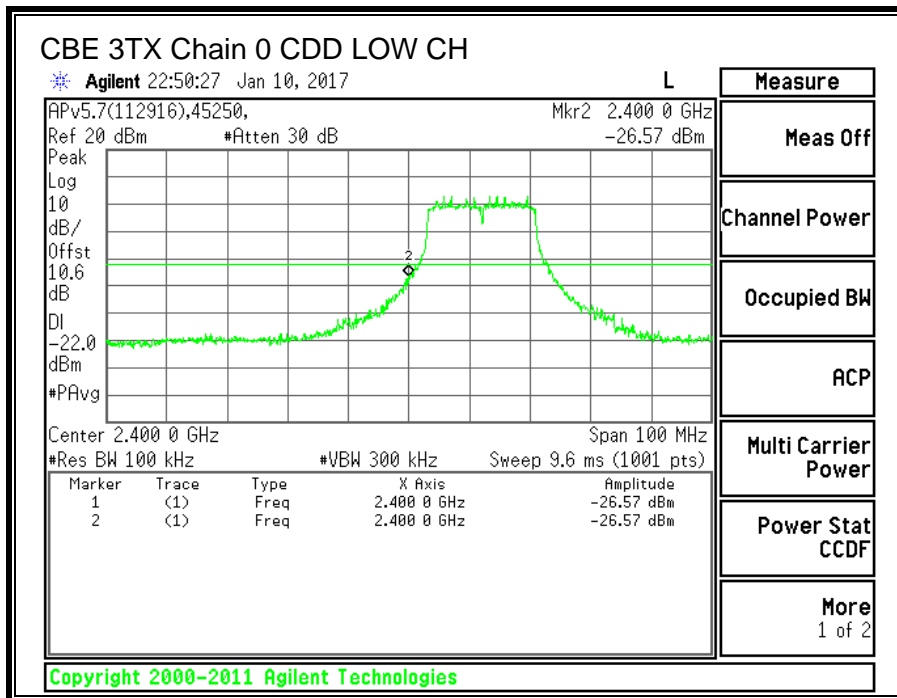


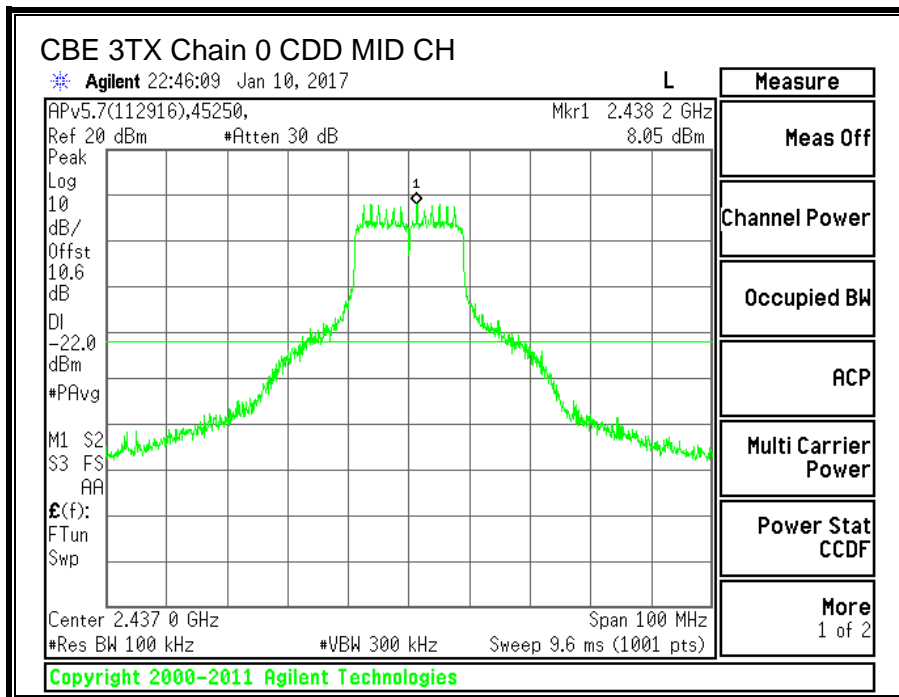
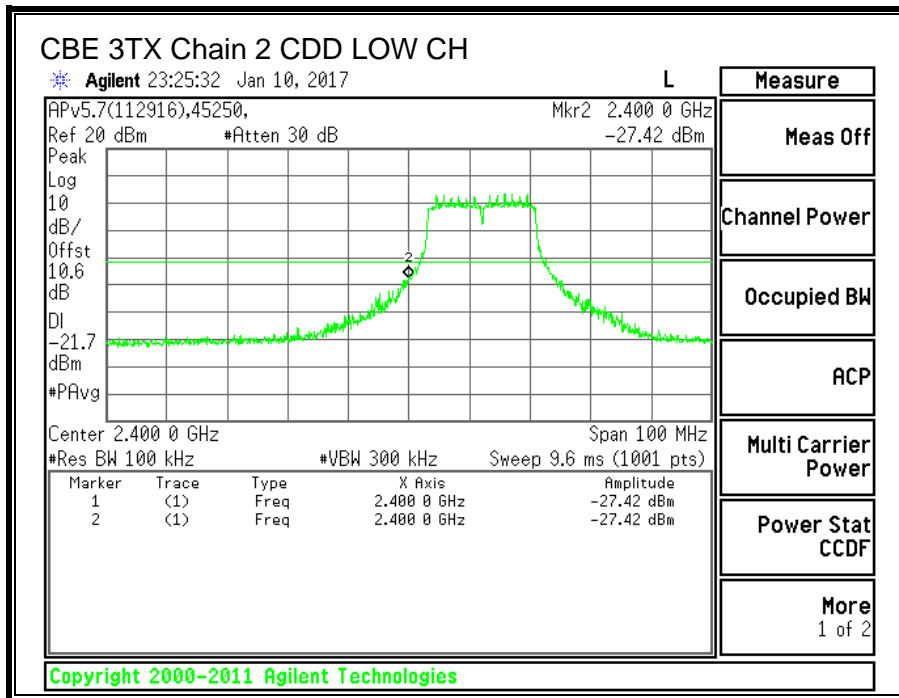


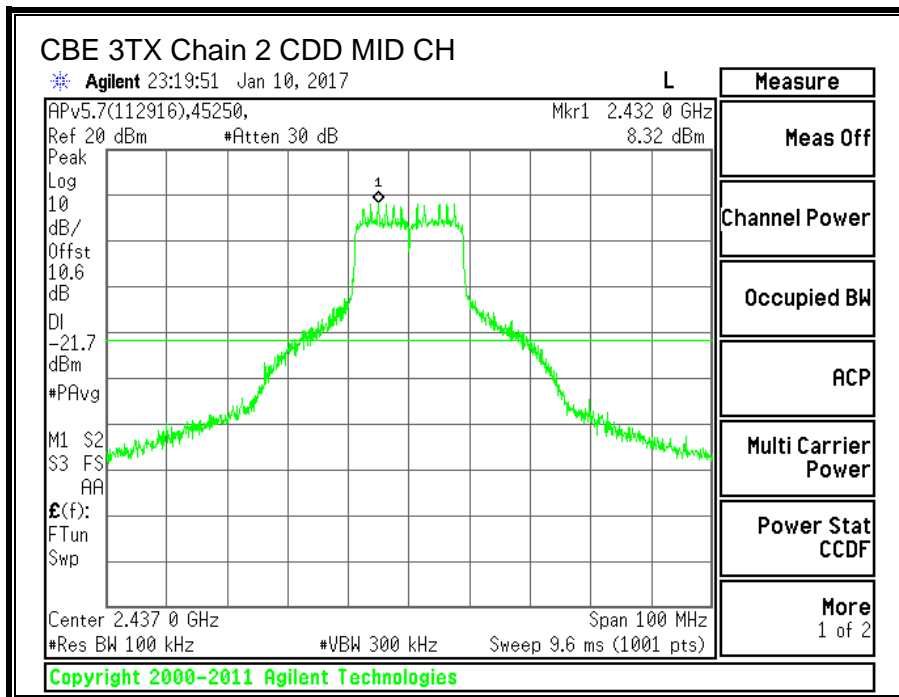
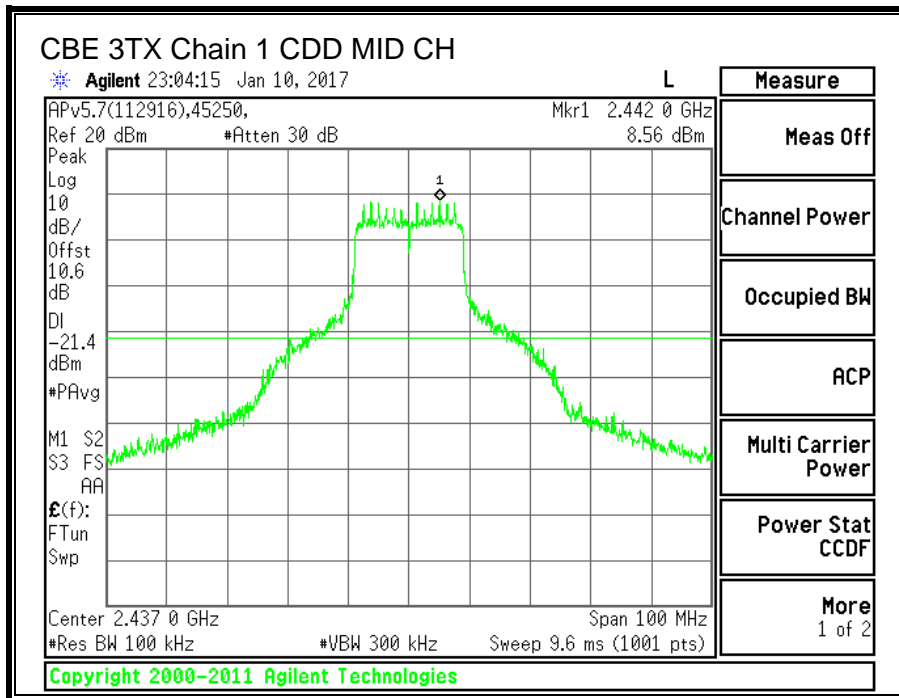


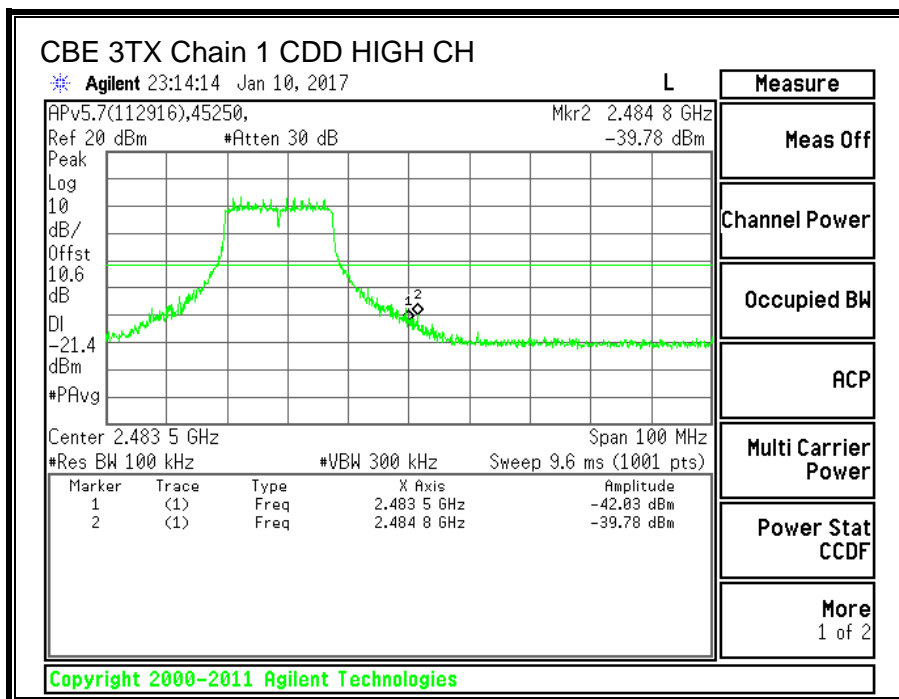
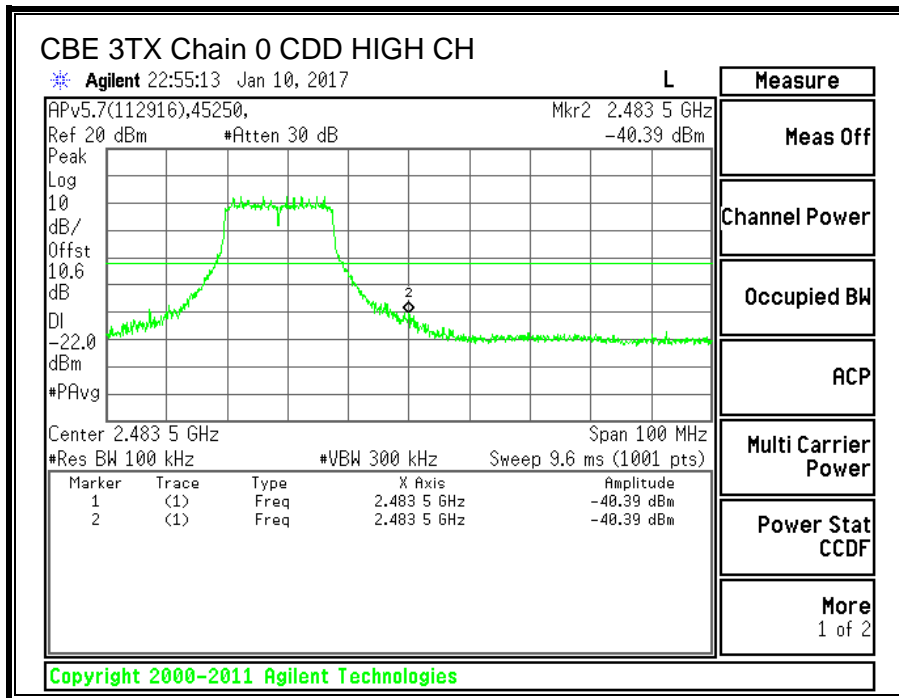


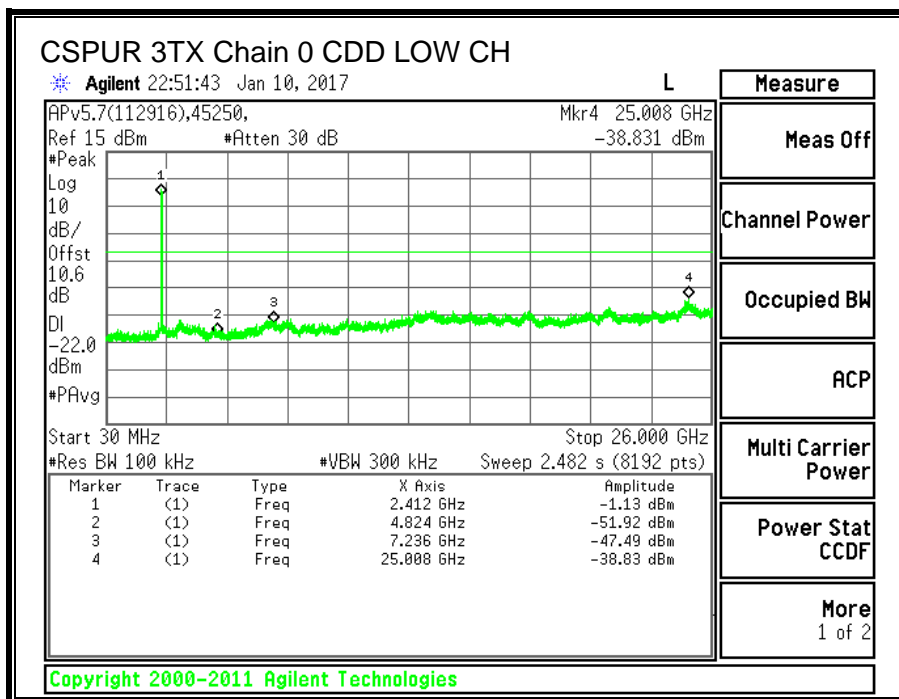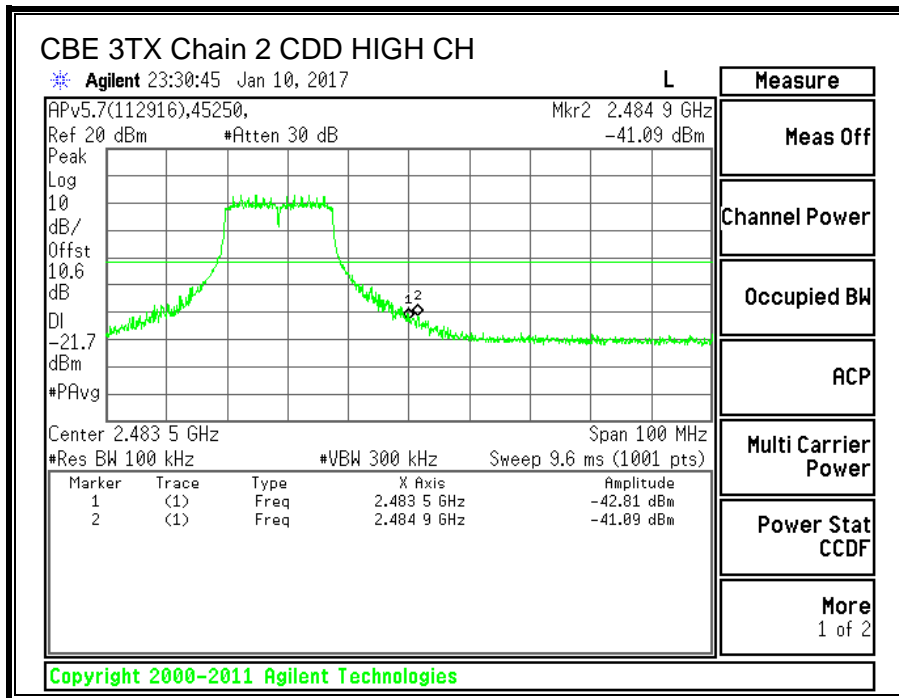

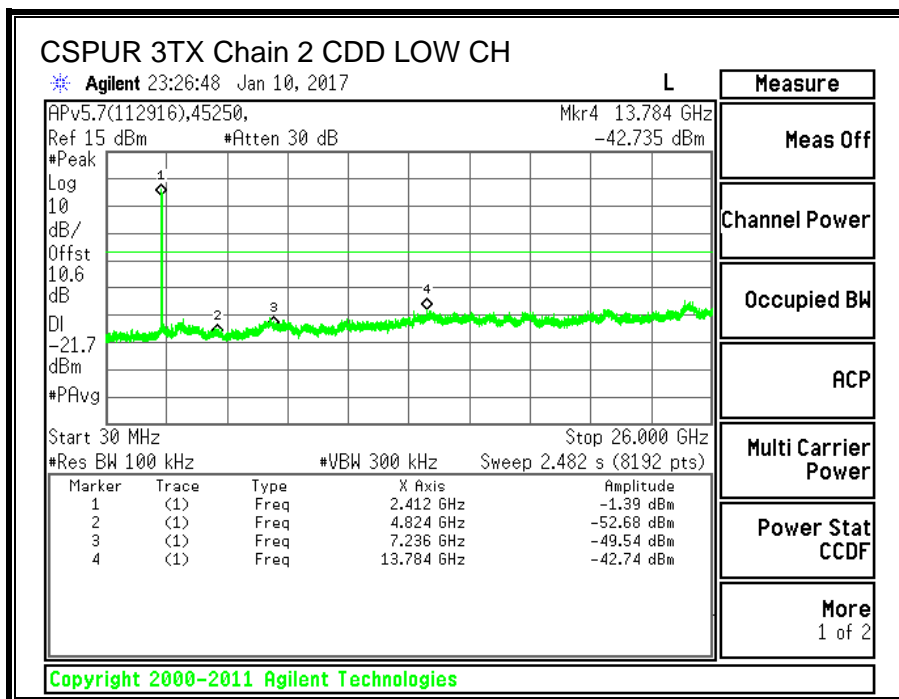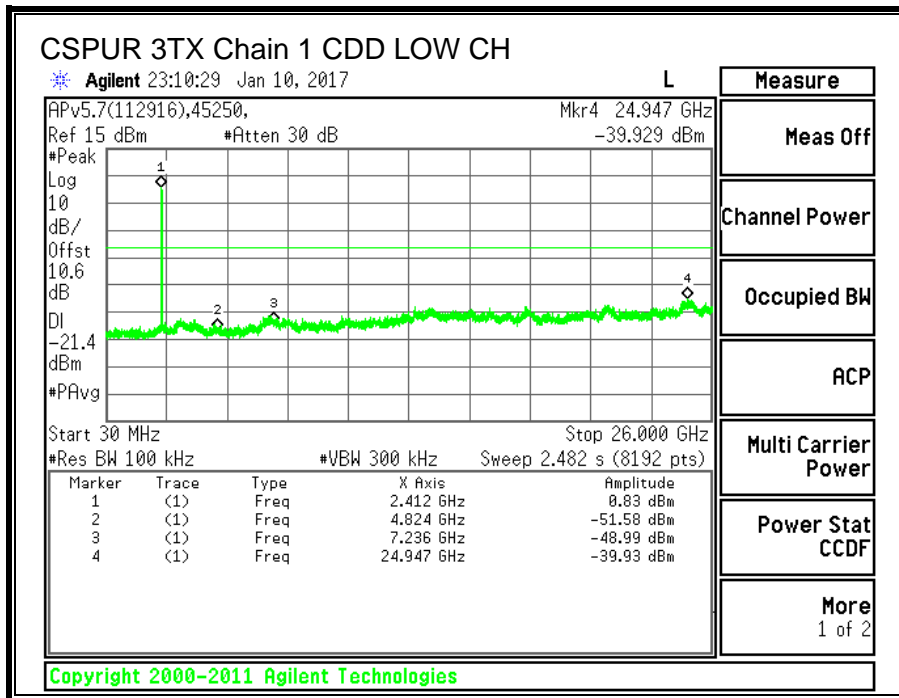

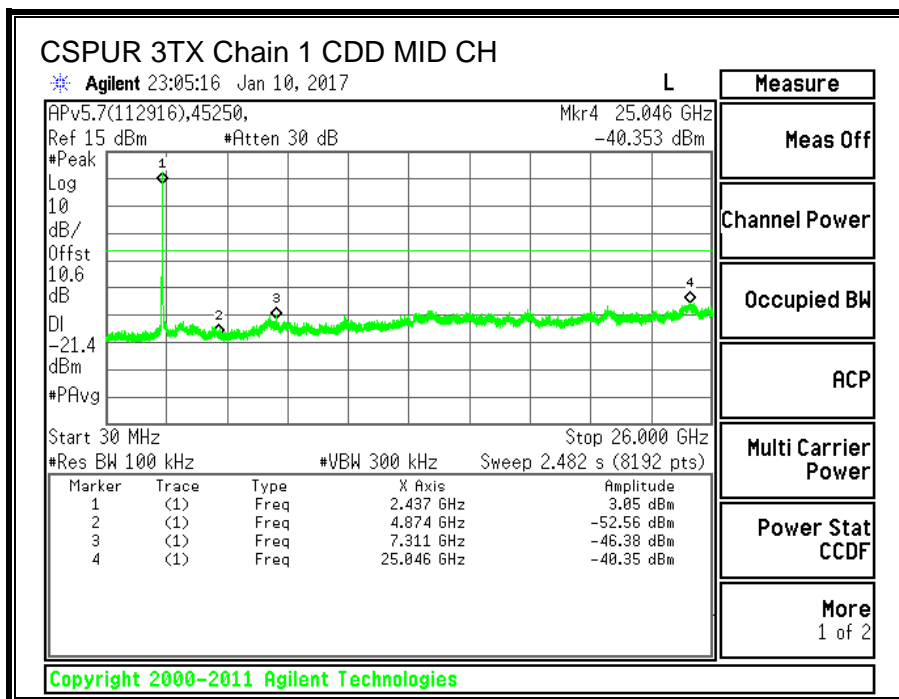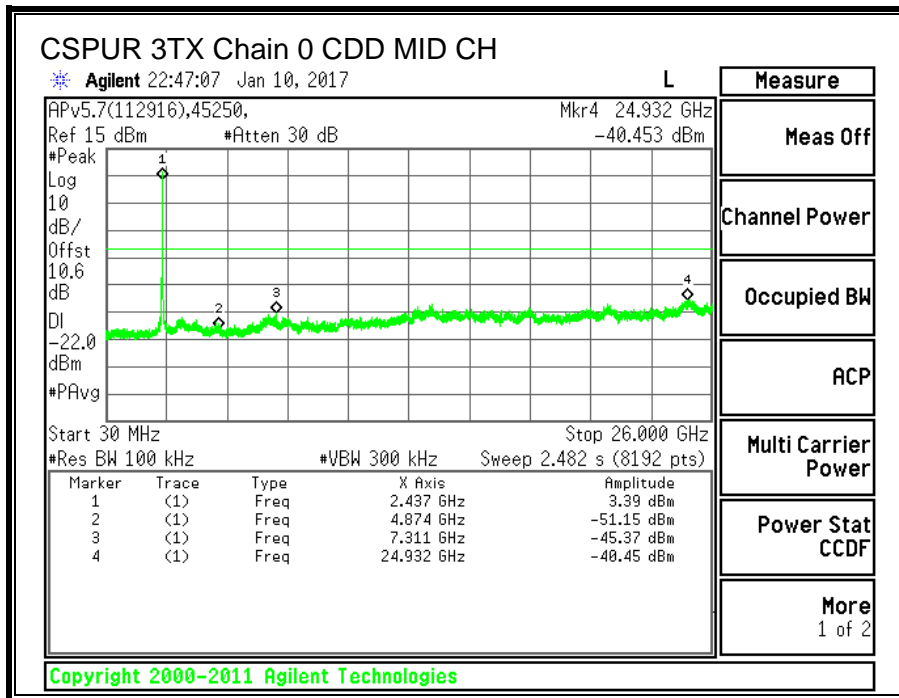

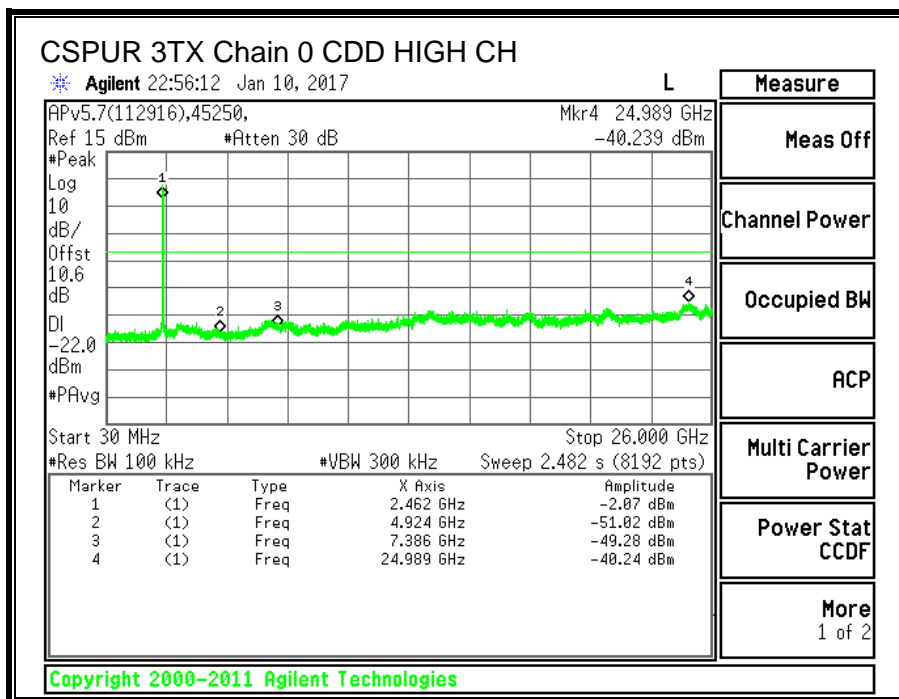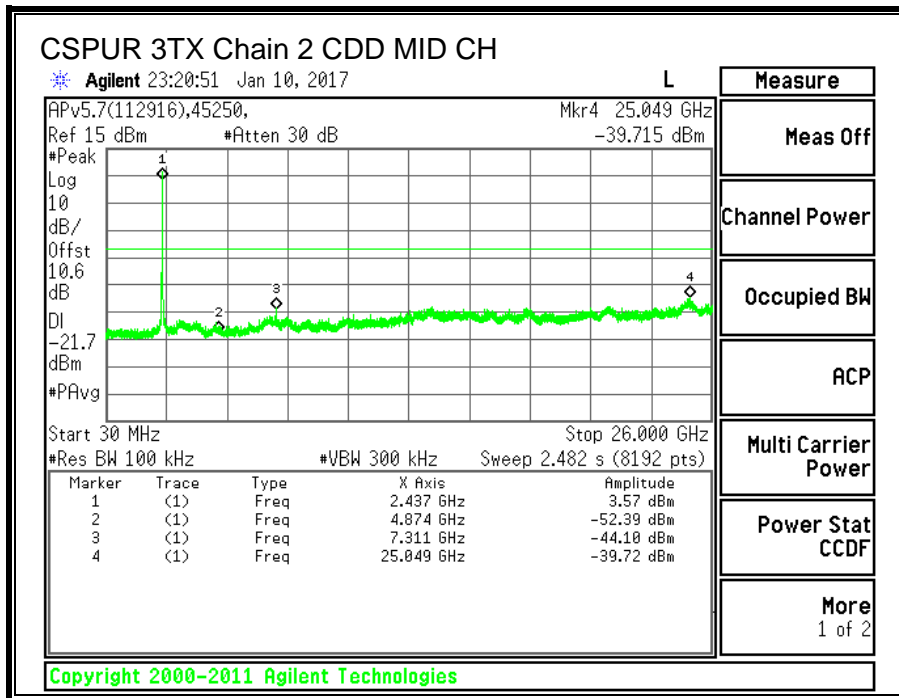

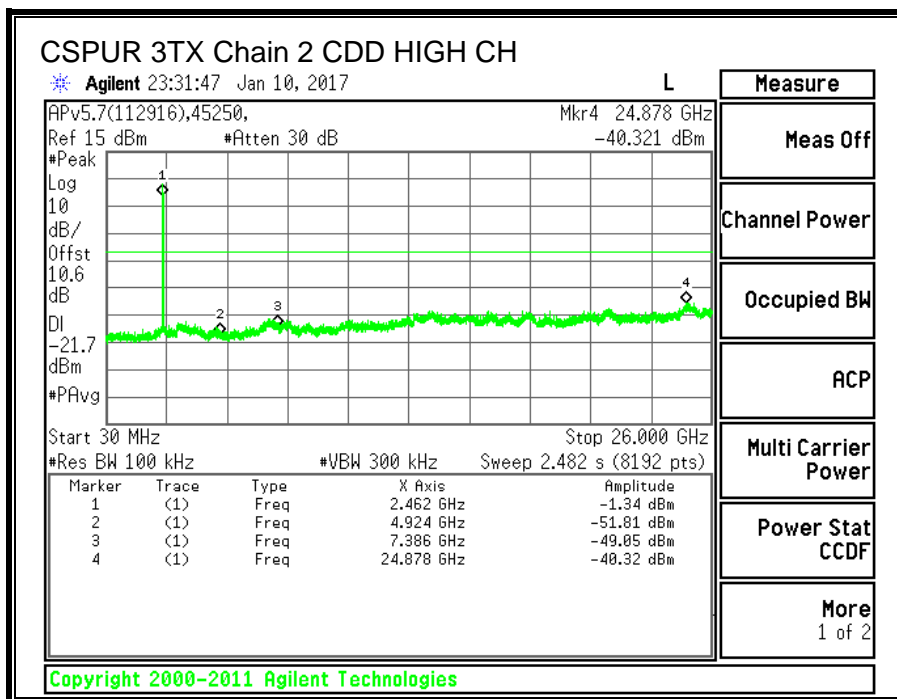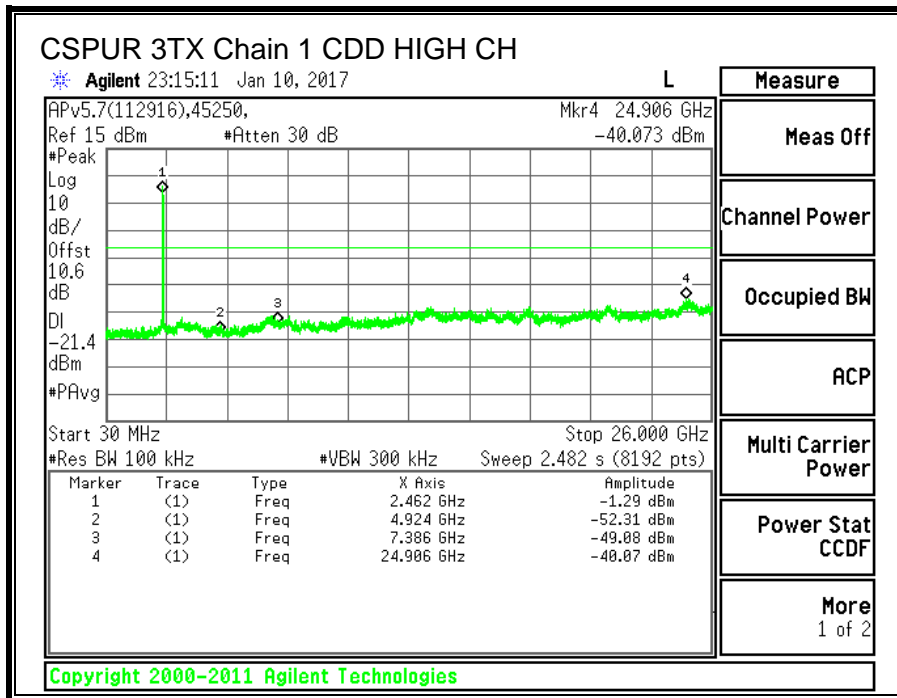

11. RADIATED TEST RESULTS

11.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-GEN, Section 8.9 and 8.10.

| Frequency Range (MHz) | Field Strength Limit (uV/m) at 3 m | Field Strength Limit (dBuV/m) at 3 m |
|-----------------------|------------------------------------|--------------------------------------|
| 0.009-0.490 | 2400/F(kHz) @ 300m | 2400/F(kHz) @ 300m |
| 0.490-1.705 | 24000/F(kHz) @ 30m | 24000/F(kHz) @ 30m |
| 1.705-30.0 | 30 @ 30m | 30 @ 30m |
| 30 - 88 | 100 | 40 |
| 88 - 216 | 150 | 43.5 |
| 216 - 960 | 200 | 46 |
| Above 960 | 500 | 54 |

NOTE: KDB 937606 OATS and Chamber Correlation Justification

- Based on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.
- OATs and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 120 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements for the 30-1000 MHz range, 9 kHz for peak detection measurements or 9 kHz for quasi-peak detection measurements for the 0.15-30 MHz range and 200 Hz for peak detection measurements or 200 Hz for quasi-peak detection measurements for the 9 to 150 kHz range. Peak detection is used unless otherwise noted as quasi-peak.

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.

For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.


For 2.4 GHz band, the spectrum from 9 kHz to 26 GHz is investigated with the EUT was set to transmit on the channel with higher output power as worst-case scenario.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

11.2. TRANSMITTER ABOVE 1 GHz

11.2.1. 11b 3TX CDD MIMO MODE IN THE 2.4GHz BAND

AUTHORIZED BANDEGE (LOW CHANNEL, CH 1)

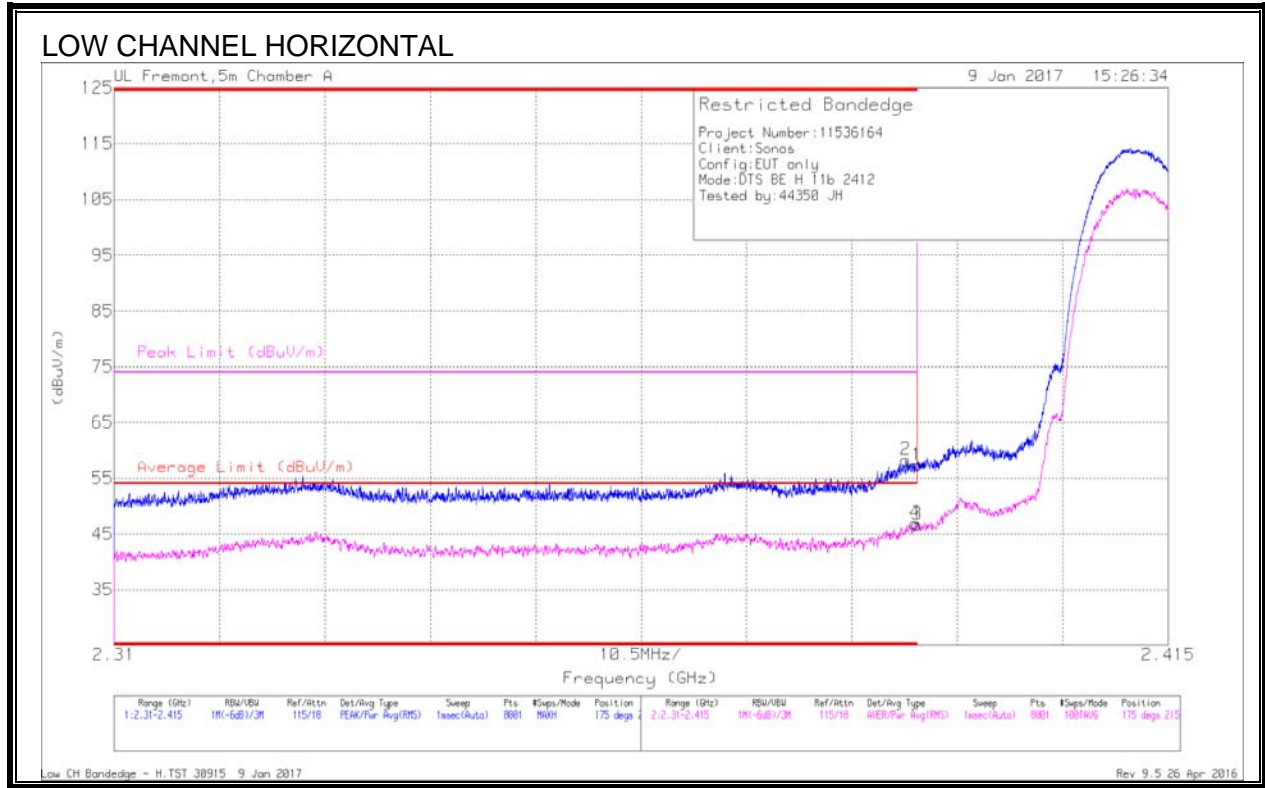


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T346 (db/m) | Amp/Cbl/Ftr/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|----------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1 | * 2.39 | 48.69 | Pk | 32.3 | -23.7 | 0 | 57.29 | - | - | 74 | -16.71 | 175 | 215 | H |
| 2 | * 2.399 | 49.62 | Pk | 32.3 | -23.7 | 0 | 58.22 | - | - | 74 | -15.78 | 175 | 215 | H |
| 3 | * 2.39 | 37.96 | RMS | 32.3 | -23.7 | 15 | 46.71 | 54 | -7.29 | - | - | 175 | 215 | H |
| 4 | * 2.39 | 38.13 | RMS | 32.3 | -23.7 | 15 | 46.88 | 54 | -7.12 | - | - | 175 | 215 | H |

* - indicates frequency in CFR47 Pt 15 / RSS-Gen 8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection

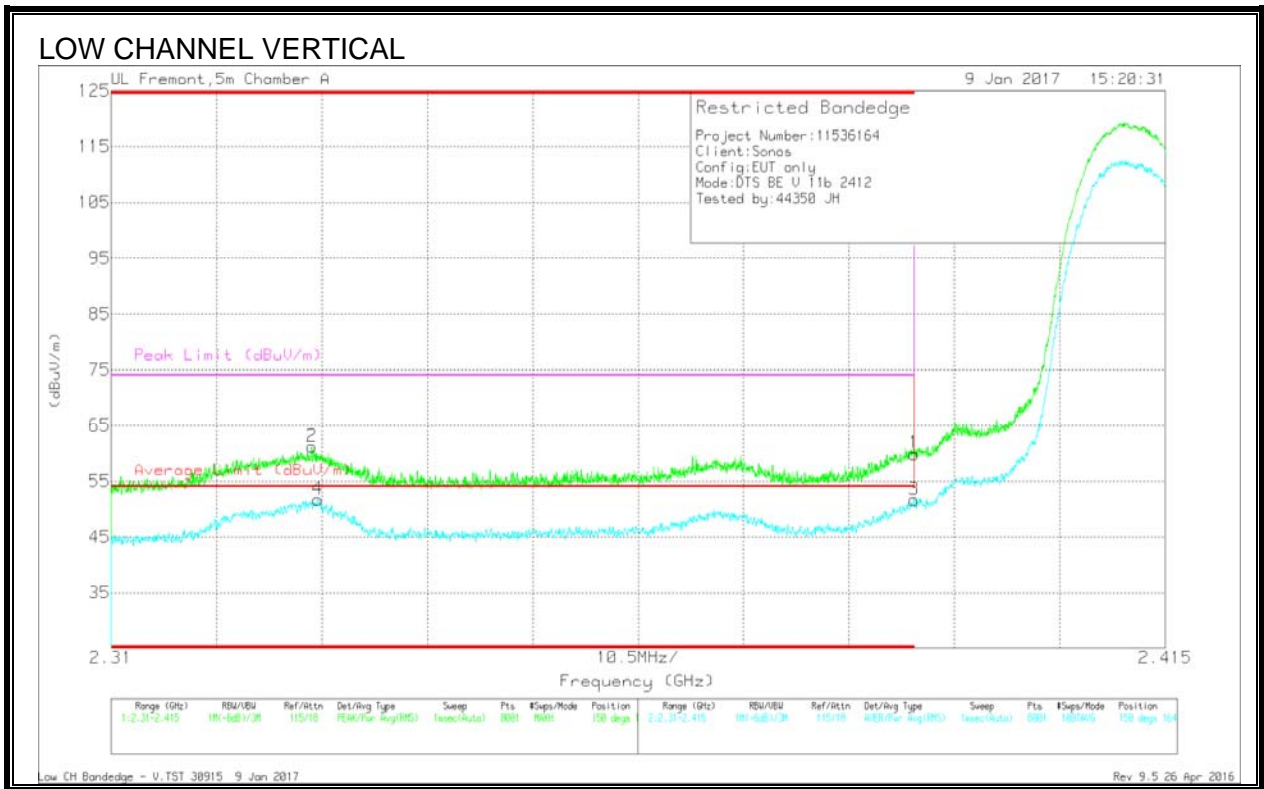


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T346 (db/m) | Amp/Cb/Fitr/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|----------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1 | * 2.39 | 51.32 | Pk | 32.3 | -23.7 | 0 | 59.92 | - | - | 74 | -14.08 | 150 | 164 | V |
| 2 | * 2.33 | 53 | Pk | 31.9 | -23.7 | 0 | 61.2 | - | - | 74 | -12.8 | 150 | 164 | V |
| 3 | * 2.39 | 42.87 | RMS | 32.3 | -23.7 | .15 | 51.62 | 54 | -2.38 | - | - | 150 | 164 | V |
| 4 | * 2.331 | 43.36 | RMS | 31.9 | -23.7 | .15 | 51.71 | 54 | -2.29 | - | - | 150 | 164 | V |

* - indicates frequency in CFR47 Pt 15 / RSS-Gen 8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEGE (HIGH CHANNEL, CH 11)

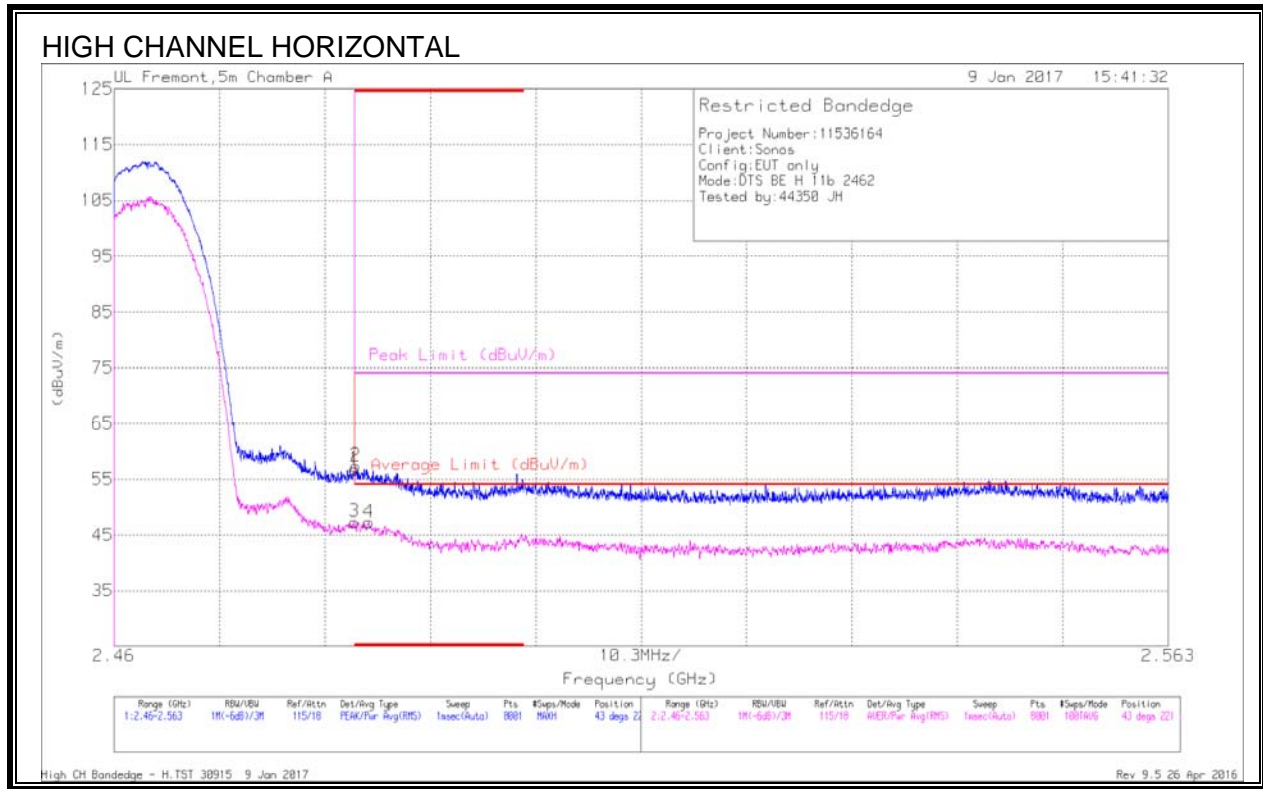


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T346 (db/m) | Amp/Cbl/Filt/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-----------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1 | * 2.484 | 47.98 | Pk | 32.4 | -23.6 | 0 | 56.78 | - | - | 74 | -17.22 | 43 | 221 | H |
| 2 | * 2.484 | 48.51 | Pk | 32.4 | -23.6 | 0 | 57.31 | - | - | 74 | -16.69 | 43 | 221 | H |
| 3 | * 2.484 | 38.38 | RMS | 32.4 | -23.6 | .15 | 47.33 | 54 | -6.67 | - | - | 43 | 221 | H |
| 4 | * 2.485 | 38.42 | RMS | 32.4 | -23.7 | .15 | 47.27 | 54 | -6.73 | - | - | 43 | 221 | H |

* - indicates frequency in CFR47 Pt 15 / RSS-Gen 8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection


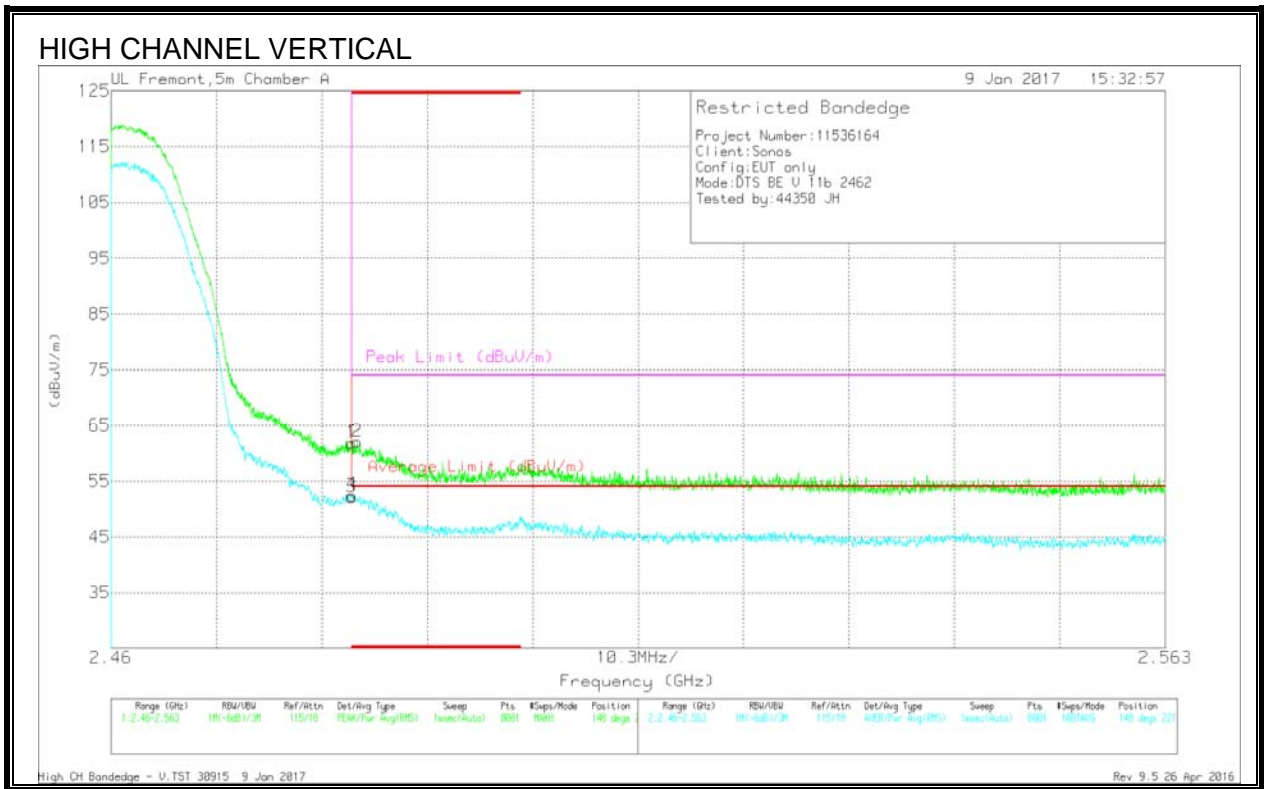


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T346 (db/m) | Amp/Cb/Filt/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|----------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1 | * 2.484 | 53.03 | Pk | 32.4 | -23.6 | 0 | 61.83 | - | - | 74 | -12.17 | 148 | 221 | V |
| 2 | * 2.484 | 53.25 | Pk | 32.4 | -23.6 | 0 | 62.05 | - | - | 74 | -11.95 | 148 | 221 | V |
| 3 | * 2.484 | 43.25 | RMS | 32.4 | -23.6 | .15 | 52.2 | 54 | -1.8 | - | - | 148 | 221 | V |
| 4 | * 2.484 | 43.51 | RMS | 32.4 | -23.6 | .15 | 52.46 | 54 | -1.54 | - | - | 148 | 221 | V |

* - indicates frequency in CFR47 Pt 15 / RSS-Gen 8.10 Restricted Band

Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS LOW CHANNEL, CH 1)

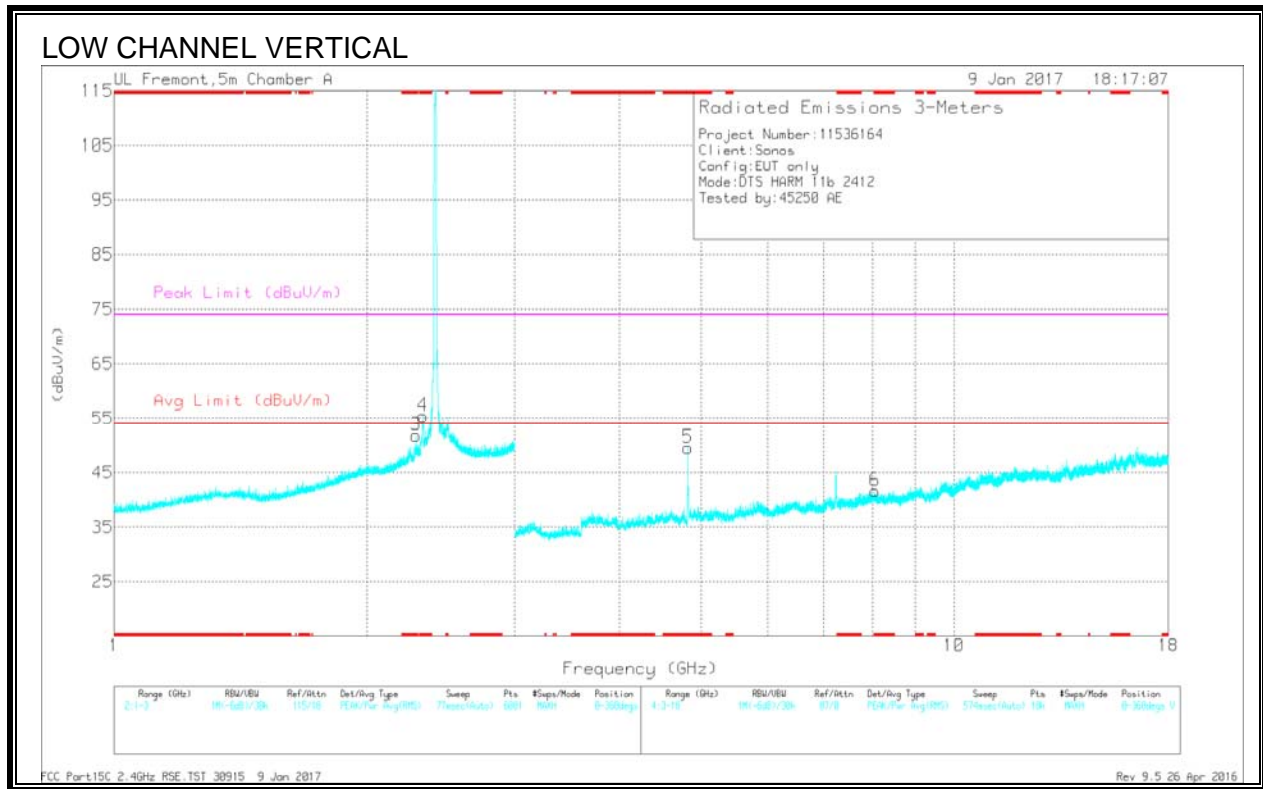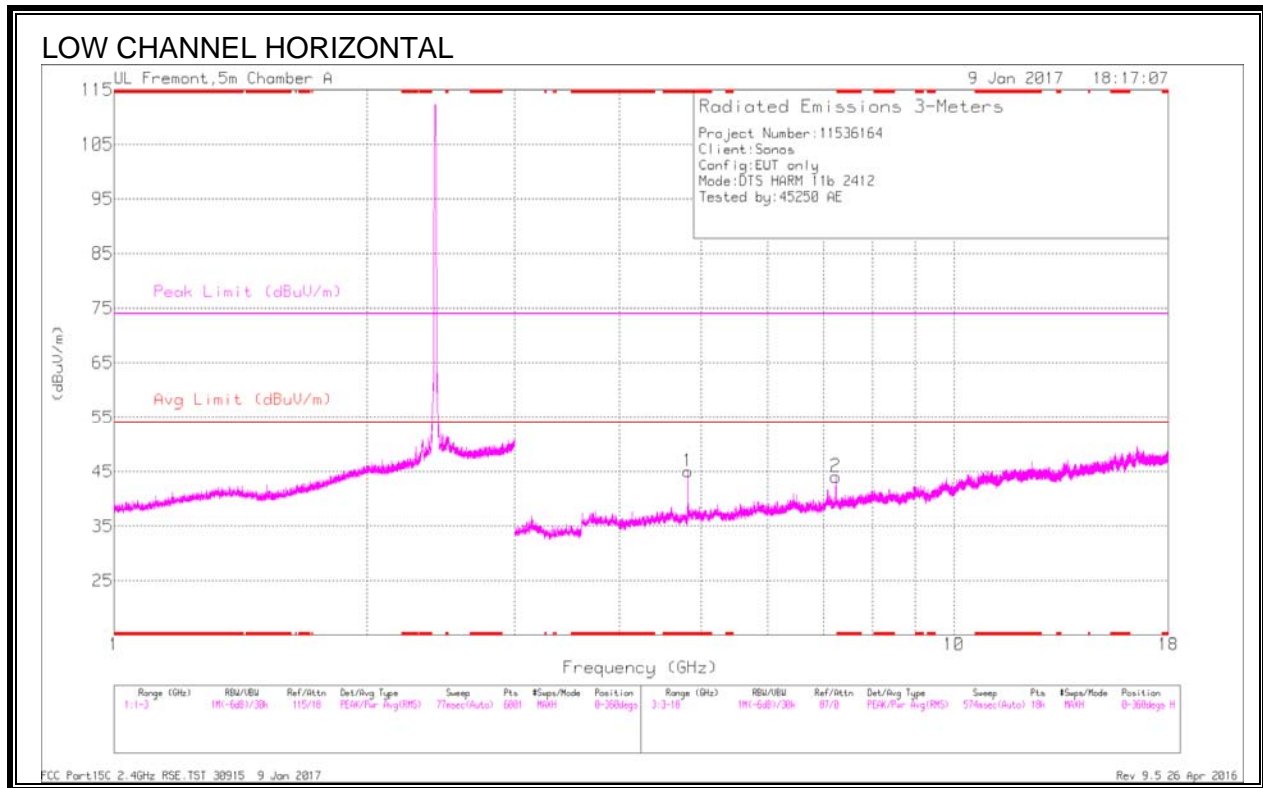



| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T346 (db/m) | Amp/Cbl/Filtr/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|------------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 3 | * 2.288 | 43.94 | Pk | 31.8 | -23.9 | 0 | 51.84 | - | - | 74 | -22.16 | 0-360 | 199 | V |
| 4 | * 2.333 | 47.23 | Pk | 32 | -23.8 | 0 | 55.43 | - | - | 74 | -18.57 | 0-360 | 101 | V |
| 1 | * 4.824 | 38.92 | Pk | 34.3 | -28.2 | 0 | 45.02 | - | - | 74 | -28.98 | 0-360 | 101 | H |
| 5 | * 4.824 | 43.44 | Pk | 34.3 | -28.2 | 0 | 49.54 | - | - | 74 | -24.46 | 0-360 | 101 | V |
| 6 | * 8.051 | 28.58 | Pk | 35.9 | -22.8 | 0 | 41.68 | - | - | 74 | -32.32 | 0-360 | 199 | V |
| 2 | 7.235 | 33.28 | Pk | 35.7 | -24.9 | 0 | 44.08 | - | - | - | - | 0-360 | 101 | H |

* - indicates frequency in CFR47 Pt 15 / RSS-Gen 8.10 Restricted Band
 Pk - Peak detector

| Frequency (GHz) | Meter Reading (dBuV) | Det | AF T346 (db/m) | Amp/Cbl/Filtr/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|------------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 2.333 | 53.32 | PK2 | 31.9 | -23.8 | 0 | 61.42 | - | - | 74 | -12.58 | 152 | 151 | V |
| * 2.333 | 43.52 | MAV1 | 31.9 | -23.8 | .15 | 51.77 | 54 | -2.23 | - | - | 152 | 151 | V |
| * 2.288 | 52.3 | PK2 | 31.8 | -23.9 | 0 | 60.2 | - | - | 74 | -13.8 | 147 | 154 | V |
| * 2.288 | 40.89 | MAV1 | 31.8 | -23.9 | .15 | 48.94 | 54 | -5.06 | - | - | 147 | 154 | V |
| * 4.824 | 42.1 | PK2 | 34.3 | -28.2 | 0 | 48.2 | - | - | 74 | -25.8 | 6 | 205 | H |
| * 4.824 | 31.93 | MAV1 | 34.3 | -28.2 | .15 | 38.18 | 54 | -15.82 | - | - | 6 | 205 | H |
| * 4.824 | 46.53 | PK2 | 34.3 | -28.2 | 0 | 52.63 | - | - | 74 | -21.37 | 82 | 132 | V |
| * 4.824 | 37.04 | MAV1 | 34.3 | -28.2 | .15 | 43.29 | 54 | -10.71 | - | - | 82 | 132 | V |
| * 8.053 | 34.16 | PK2 | 35.9 | -22.7 | 0 | 47.36 | - | - | 74 | -26.64 | 1 | 210 | V |
| * 8.05 | 23.56 | MAV1 | 35.9 | -22.9 | .15 | 36.71 | 54 | -17.29 | - | - | 1 | 210 | V |
| 7.235 | 39.48 | PK2 | 35.7 | -24.9 | 0 | 50.28 | - | - | - | - | 349 | 101 | H |
| 7.237 | 29.81 | MAV1 | 35.7 | -24.9 | .15 | 40.76 | - | - | - | - | 349 | 101 | H |

* - indicates frequency in CFR47 Pt 15 / RSS-Gen 8.10 Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAV1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS MID CHANNEL, CH 6)

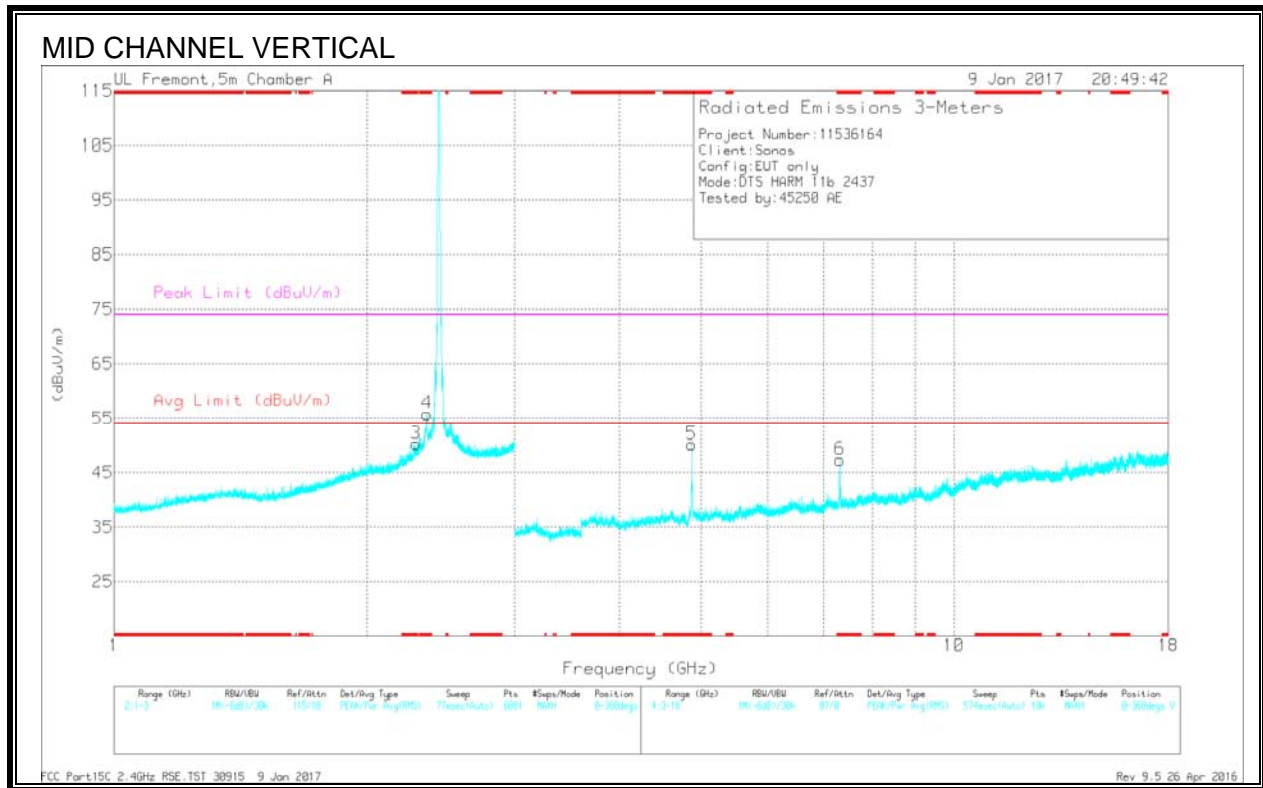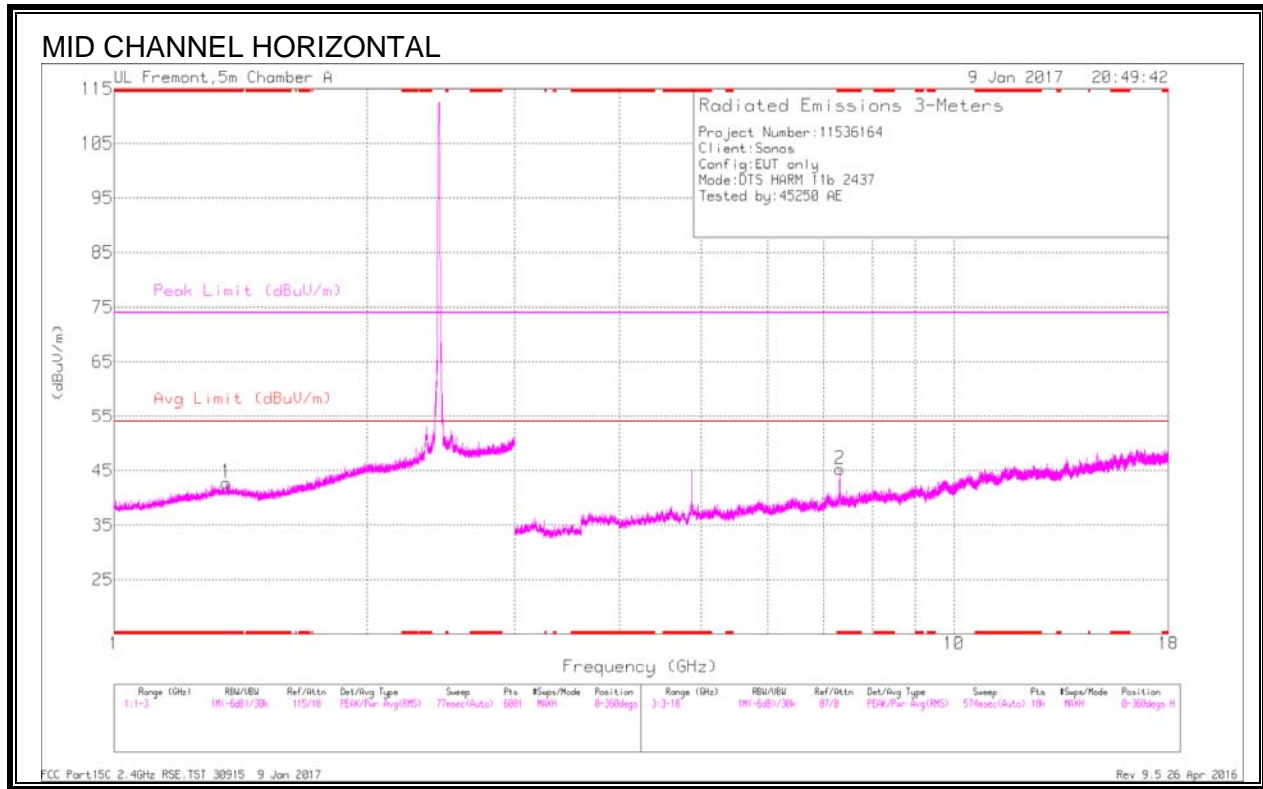



| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T346 (db/m) | Amp/Cbl/Filtr/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|------------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1 | * 1.362 | 37.72 | Pk | 29 | -23.9 | 0 | 42.82 | - | - | 74 | -31.18 | 0-360 | 101 | H |
| 3 | * 2.288 | 42.38 | Pk | 31.8 | -23.9 | 0 | 50.28 | - | - | 74 | -23.72 | 0-360 | 199 | V |
| 4 | * 2.359 | 47.43 | Pk | 32.1 | -23.7 | 0 | 55.83 | - | - | 74 | -18.17 | 0-360 | 99 | V |
| 2 | * 7.311 | 34.6 | Pk | 35.7 | -25 | 0 | 45.3 | - | - | 74 | -28.7 | 0-360 | 101 | H |
| 5 | * 4.874 | 43.68 | Pk | 34.3 | -27.8 | 0 | 50.18 | - | - | 74 | -23.82 | 0-360 | 199 | V |
| 6 | * 7.311 | 36.66 | Pk | 35.7 | -25 | 0 | 47.36 | - | - | 74 | -26.64 | 0-360 | 199 | V |

* - indicates frequency in CFR47 Pt 15 / RSS-Gen 8.10 Restricted Band
 Pk - Peak detector

| Frequency (GHz) | Meter Reading (dBuV) | Det | AF T346 (db/m) | Amp/Cbl/Filtr/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|------------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 1.364 | 41.88 | PK2 | 29 | -23.8 | 0 | 47.08 | - | - | 74 | -26.92 | 72 | 168 | H |
| * 1.363 | 31.77 | MAV1 | 29 | -23.8 | .15 | 37.12 | 54 | -16.88 | - | - | 72 | 168 | H |
| * 2.288 | 49.07 | PK2 | 31.8 | -23.9 | 0 | 56.97 | - | - | 74 | -17.03 | 128 | 208 | V |
| * 2.288 | 39.57 | MAV1 | 31.8 | -23.9 | .15 | 47.62 | 54 | -6.38 | - | - | 128 | 208 | V |
| * 2.359 | 54.05 | PK2 | 32.1 | -23.7 | 0 | 62.45 | - | - | 74 | -11.55 | 154 | 128 | V |
| * 2.359 | 44.05 | MAV1 | 32.1 | -23.7 | .15 | 52.6 | 54 | -1.4 | - | - | 154 | 128 | V |
| * 7.312 | 40.55 | PK2 | 35.7 | -25 | 0 | 51.25 | - | - | 74 | -22.75 | 347 | 114 | H |
| * 7.312 | 31.22 | MAV1 | 35.7 | -25 | .15 | 42.07 | 54 | -11.93 | - | - | 347 | 114 | H |
| * 4.874 | 47.36 | PK2 | 34.3 | -27.8 | 0 | 53.86 | - | - | 74 | -20.14 | 47 | 159 | V |
| * 4.874 | 37.77 | MAV1 | 34.3 | -27.8 | .15 | 44.42 | 54 | -9.58 | - | - | 47 | 159 | V |
| * 7.309 | 41.76 | PK2 | 35.7 | -25 | 0 | 52.46 | - | - | 74 | -21.54 | 17 | 212 | V |
| * 7.31 | 33.08 | MAV1 | 35.7 | -25 | .15 | 43.93 | 54 | -10.07 | - | - | 17 | 212 | V |

* - indicates frequency in CFR47 Pt 15 / RSS-Gen 8.10 Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAV1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS HIGH CHANNEL, CH 11)

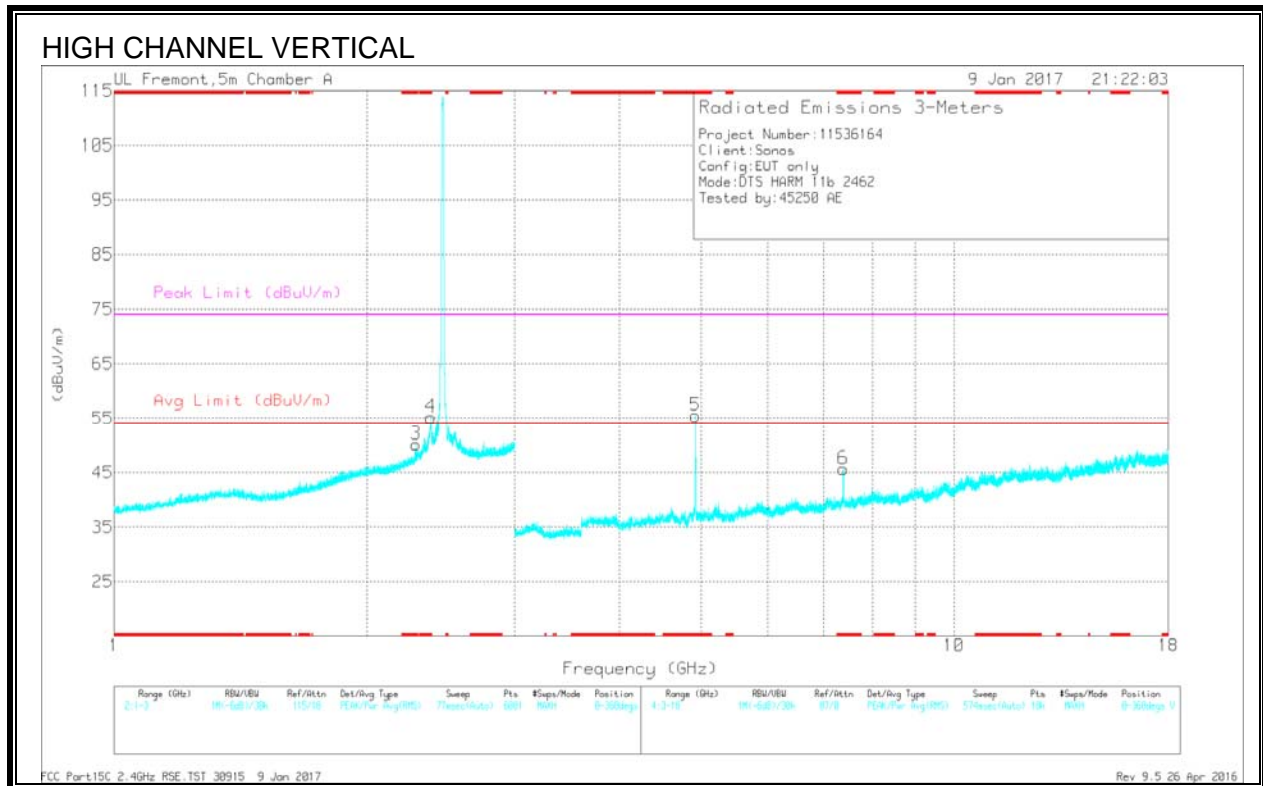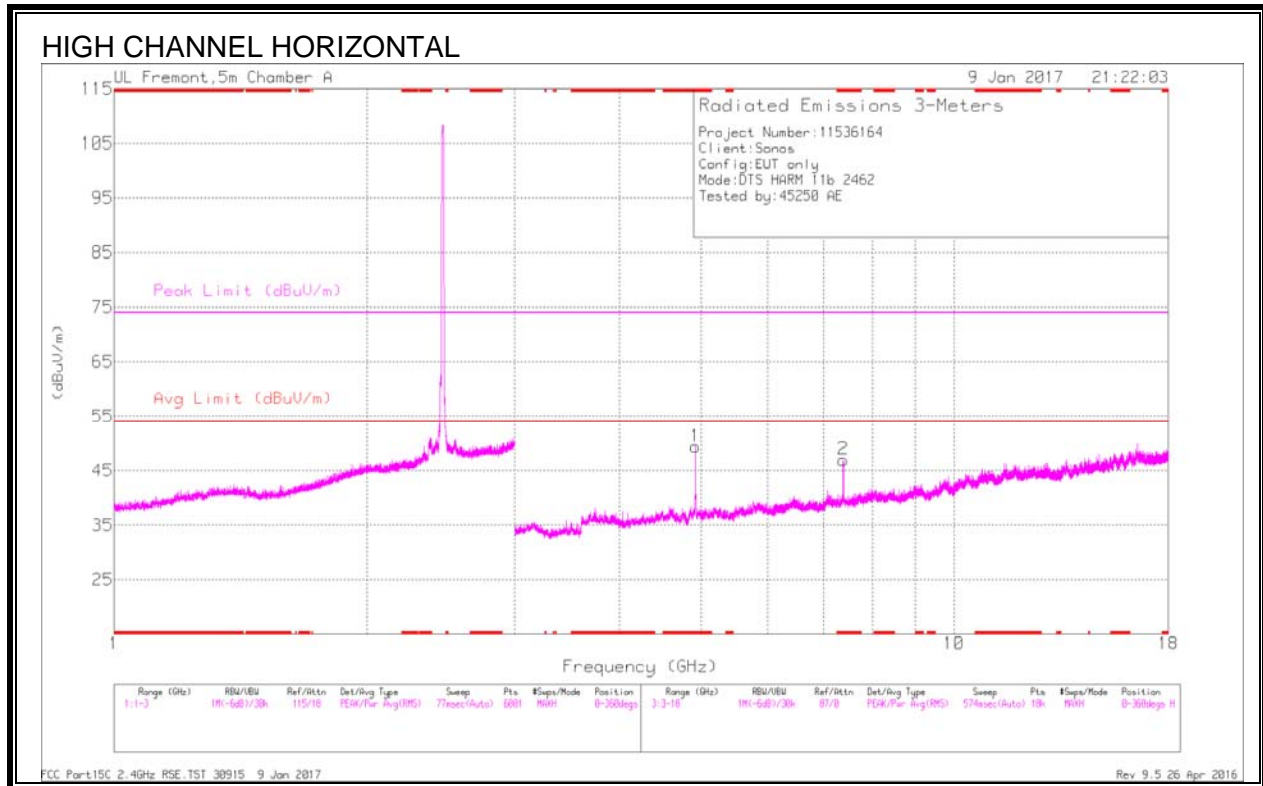

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T346 (db/m) | Amp/Cbl/Filtr/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|------------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 3 | * 2.288 | 42.29 | Pk | 31.8 | -23.9 | 0 | 50.19 | - | - | 74 | -23.81 | 0-360 | 199 | V |
| 4 | * 2.384 | 46.69 | Pk | 32.2 | -23.7 | 0 | 55.19 | - | - | 74 | -18.81 | 0-360 | 101 | V |
| 1 | * 4.924 | 42.88 | Pk | 34.3 | -27.8 | 0 | 49.38 | - | - | 74 | -24.62 | 0-360 | 101 | H |
| 2 | * 7.384 | 35.17 | Pk | 35.7 | -23.9 | 0 | 46.97 | - | - | 74 | -27.03 | 0-360 | 101 | H |
| 5 | * 4.924 | 48.98 | Pk | 34.3 | -27.8 | 0 | 55.48 | - | - | 74 | -18.52 | 0-360 | 101 | V |
| 6 | * 7.384 | 33.88 | Pk | 35.7 | -23.9 | 0 | 45.88 | - | - | 74 | -28.32 | 0-360 | 101 | V |


* - indicates frequency in CFR47 Pt 15 / RSS-Gen 8.10 Restricted Band
 Pk - Peak detector

| Frequency (GHz) | Meter Reading (dBuV) | Det | AF T346 (db/m) | Amp/Cbl/Filtr/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|------------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 2.288 | 48.58 | PK2 | 31.8 | -23.9 | 0 | 56.48 | - | - | 74 | -17.52 | 188 | 195 | V |
| * 2.288 | 38.89 | MAV1 | 31.8 | -23.9 | .15 | 46.94 | 54 | -7.06 | - | - | 188 | 195 | V |
| * 2.384 | 52.2 | PK2 | 32.2 | -23.7 | 0 | 60.7 | - | - | 74 | -13.3 | 286 | 106 | V |
| * 2.384 | 42.69 | MAV1 | 32.2 | -23.7 | .15 | 51.34 | 54 | -2.66 | - | - | 286 | 106 | V |
| * 4.924 | 44.62 | PK2 | 34.3 | -27.8 | 0 | 51.12 | - | - | 74 | -22.88 | 4 | 284 | H |
| * 4.924 | 36.64 | MAV1 | 34.3 | -27.8 | .15 | 43.29 | 54 | -10.71 | - | - | 4 | 284 | H |
| * 7.384 | 40.49 | PK2 | 35.7 | -23.9 | 0 | 52.29 | - | - | 74 | -21.71 | 25 | 140 | H |
| * 7.385 | 30.76 | MAV1 | 35.7 | -23.9 | .15 | 42.71 | 54 | -11.29 | - | - | 25 | 140 | H |
| * 4.924 | 51.11 | PK2 | 34.3 | -27.8 | 0 | 57.61 | - | - | 74 | -16.39 | 301 | 112 | V |
| * 4.924 | 42.26 | MAV1 | 34.3 | -27.8 | .15 | 48.91 | 54 | -5.09 | - | - | 301 | 112 | V |
| * 7.384 | 39.76 | PK2 | 35.7 | -23.9 | 0 | 51.56 | - | - | 74 | -22.44 | 1 | 223 | V |
| * 7.385 | 30.62 | MAV1 | 35.7 | -23.9 | .15 | 42.57 | 54 | -11.43 | - | - | 1 | 223 | V |

* - indicates frequency in CFR47 Pt 15 / RSS-Gen 8.10 Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAV1 - KDB558074 Option 1 Maximum RMS Average

11.2.2. 11g 3TX CDD MIMO MODE IN THE 2.4GHz BAND

AUTHORIZED BANDEDGE (LOW CHANNEL, CH 1)

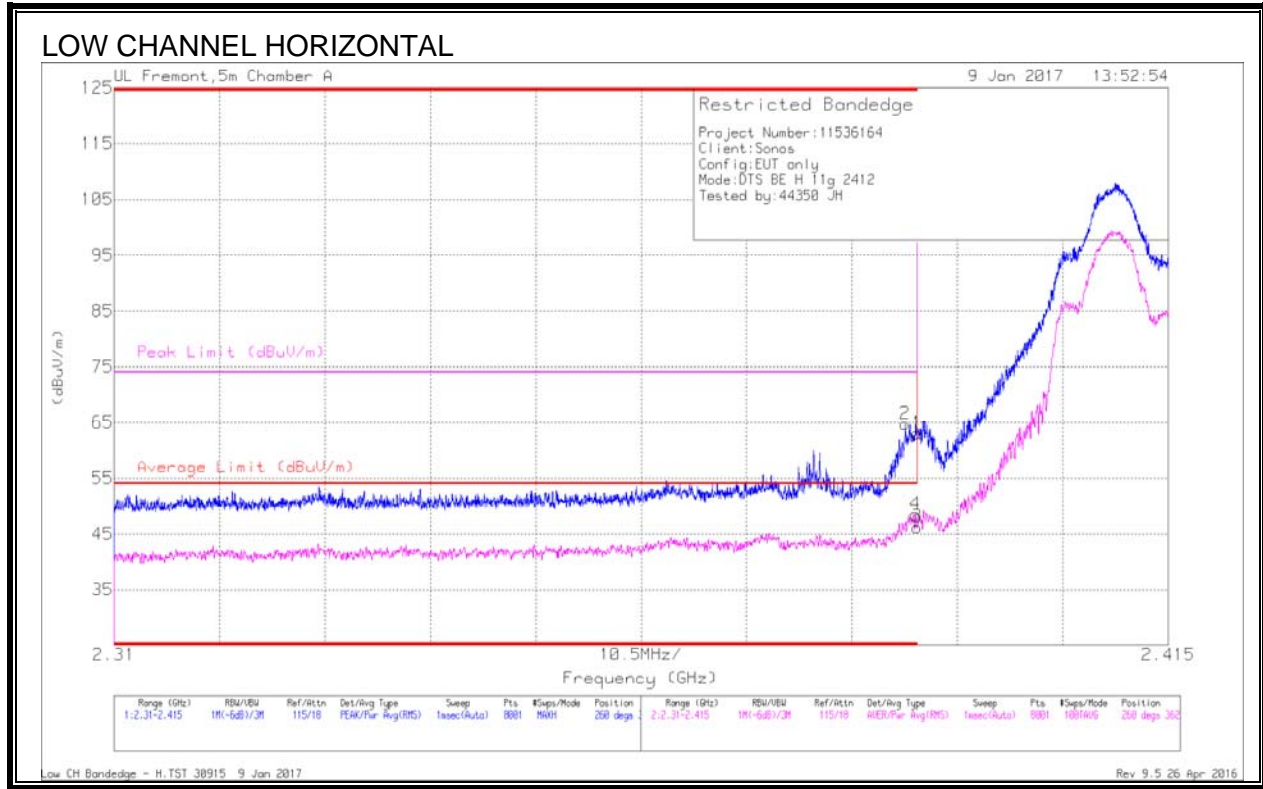


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T346 (db/m) | Amp/Cb/Fitr/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|----------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1 | * 2.39 | 54.44 | Pk | 32.3 | -23.7 | 0 | 63.04 | - | - | 74 | -10.96 | 260 | 362 | H |
| 2 | * 2.389 | 56.14 | Pk | 32.3 | -23.7 | 0 | 64.74 | - | - | 74 | -9.26 | 260 | 362 | H |
| 3 | * 2.39 | 37.21 | RMS | 32.3 | -23.7 | .4 | 46.21 | 54 | -7.79 | - | - | 260 | 362 | H |
| 4 | * 2.39 | 39.49 | RMS | 32.3 | -23.7 | .4 | 48.49 | 54 | -5.51 | - | - | 260 | 362 | H |

* - indicates frequency in CFR47 Pt 15 / RSS-Gen 8.10 Restricted Band

Pk - Peak detector


RMS - RMS detection

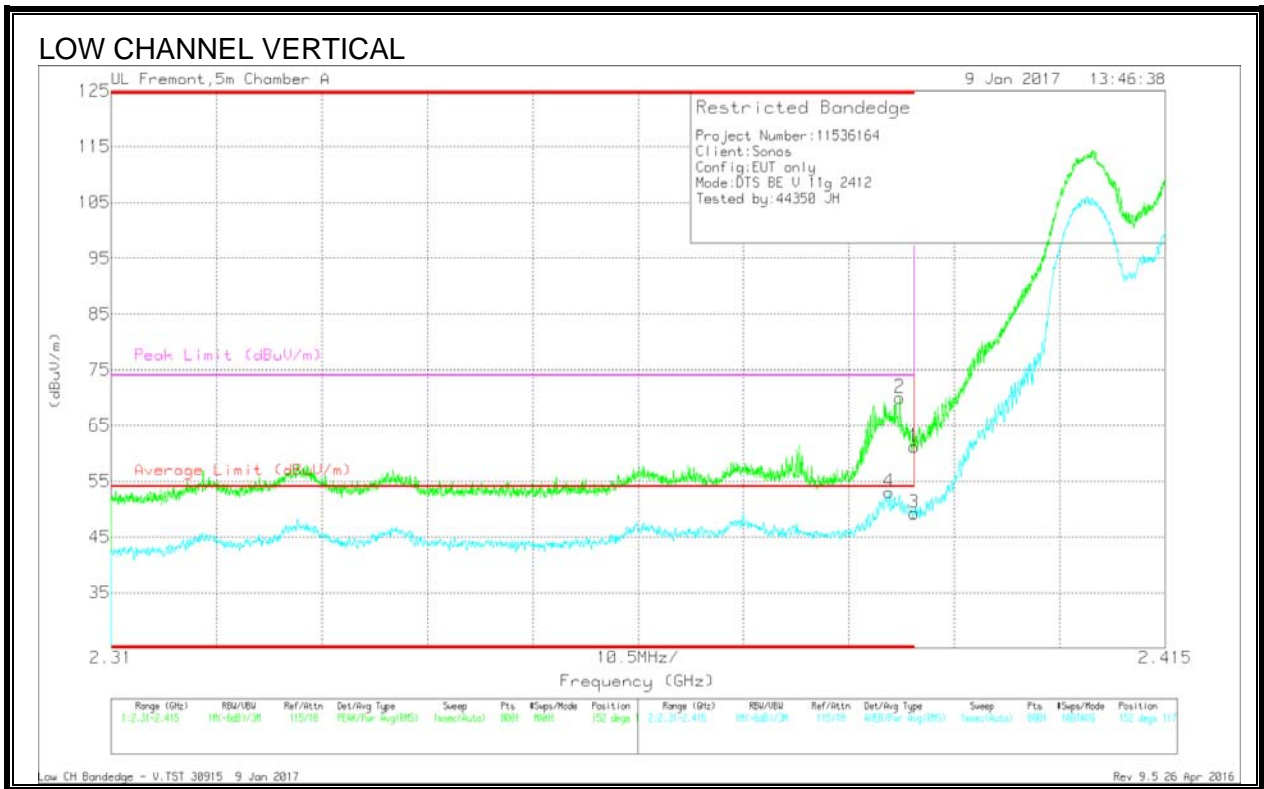

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T346 (db/m) | Amp/Cb/Filt/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|----------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1 | * 2.39 | 52.62 | Pk | 32.3 | -23.7 | 0 | 61.22 | - | - | 74 | -12.78 | 152 | 117 | V |
| 2 | * 2.389 | 61.42 | Pk | 32.3 | -23.7 | 0 | 70.02 | - | - | 74 | -3.98 | 152 | 117 | V |
| 3 | * 2.39 | 40.3 | RMS | 32.3 | -23.7 | .4 | 49.3 | 54 | -4.7 | - | - | 152 | 117 | V |
| 4 | * 2.388 | 44.05 | RMS | 32.3 | -23.7 | .4 | 53.05 | 54 | -95 | - | - | 152 | 117 | V |


* - indicates frequency in CFR47 Pt 15 / RSS-Gen 8.10 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

AUTHORIZED BANDEGE (HIGH CHANNEL, CH 11)

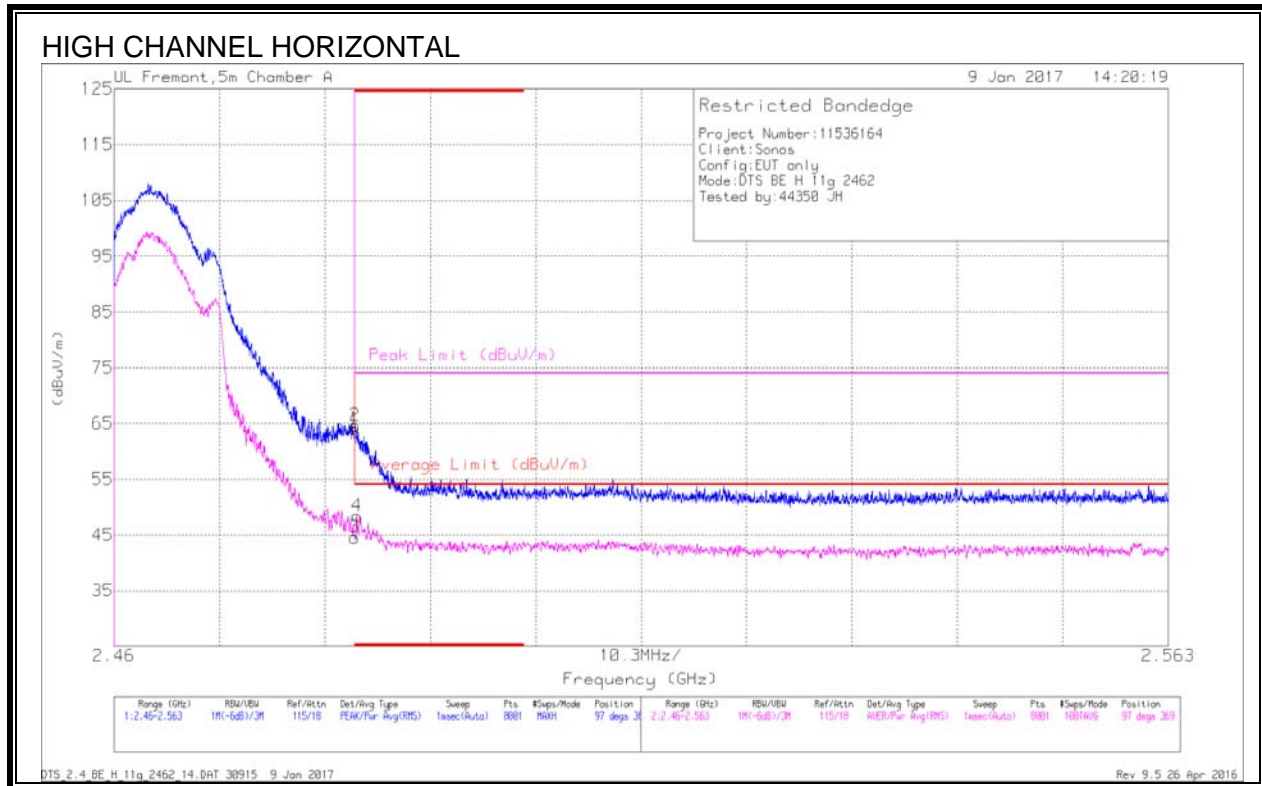

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T346 (db/m) | Amp/Cbl/Filt/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-----------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1 | * 2.484 | 55.21 | Pk | 32.4 | -23.6 | 0 | 64.01 | - | - | 74 | -9.99 | 97 | 369 | H |
| 2 | * 2.484 | 55.77 | Pk | 32.4 | -23.6 | 0 | 64.57 | - | - | 74 | -9.43 | 97 | 369 | H |
| 3 | * 2.484 | 35.34 | RMS | 32.4 | -23.6 | .4 | 44.54 | 54 | -9.46 | - | - | 97 | 369 | H |
| 4 | * 2.484 | 39.18 | RMS | 32.4 | -23.6 | .4 | 48.38 | 54 | -5.62 | - | - | 97 | 369 | H |

* - indicates frequency in CFR47 Pt 15 / RSS-Gen 8.10 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

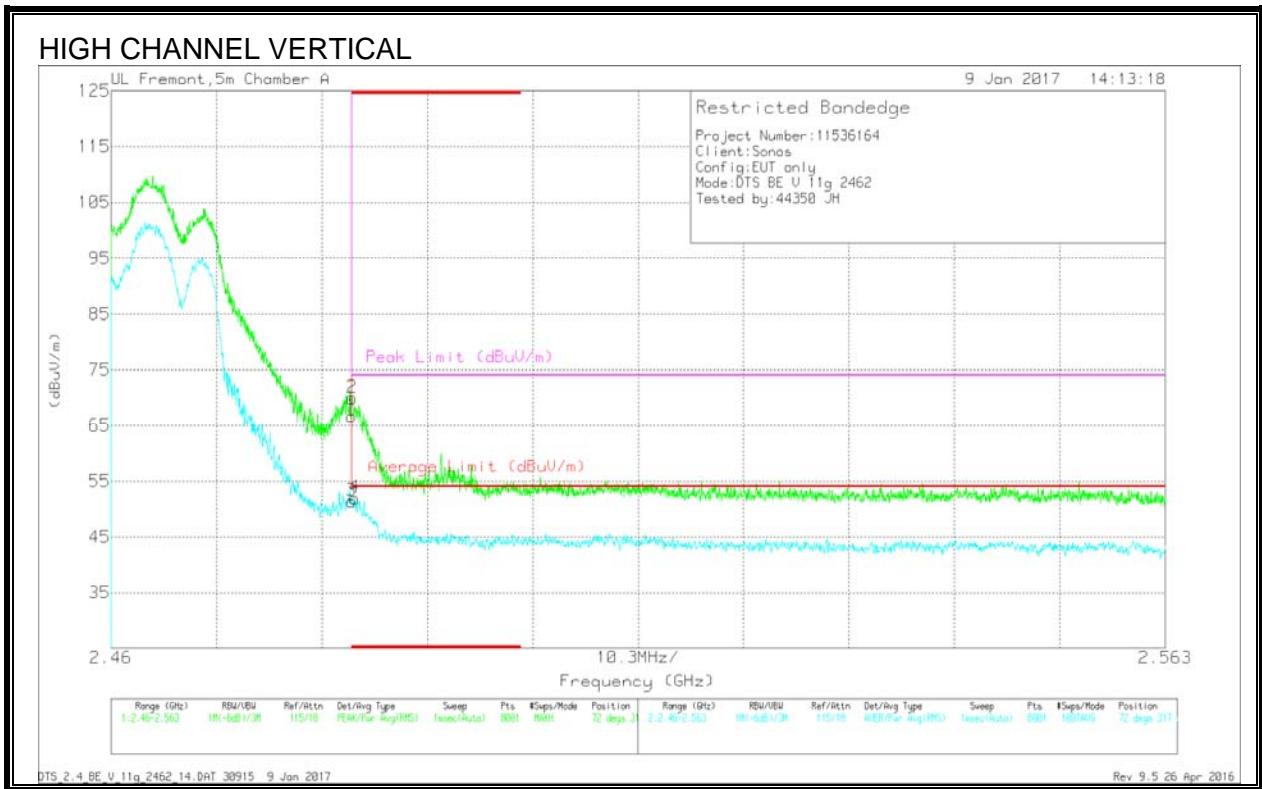



| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T346 (db/m) | Amp/Cb/Filt/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|----------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1 | * 2.484 | 57.92 | Pk | 32.4 | -23.6 | 0 | 66.72 | - | - | 74 | -7.28 | 72 | 317 | V |
| 2 | * 2.484 | 61.15 | Pk | 32.4 | -23.6 | 0 | 69.95 | - | - | 74 | -4.05 | 72 | 317 | V |
| 3 | * 2.484 | 42.19 | RMS | 32.4 | -23.6 | .4 | 51.39 | 54 | -2.61 | - | - | 72 | 317 | V |
| 4 | * 2.484 | 42.78 | RMS | 32.4 | -23.6 | .4 | 51.98 | 54 | -2.02 | - | - | 72 | 317 | V |

* - indicates frequency in CFR47 Pt 15 / RSS-Gen 8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS LOW CHANNEL, CH 1)

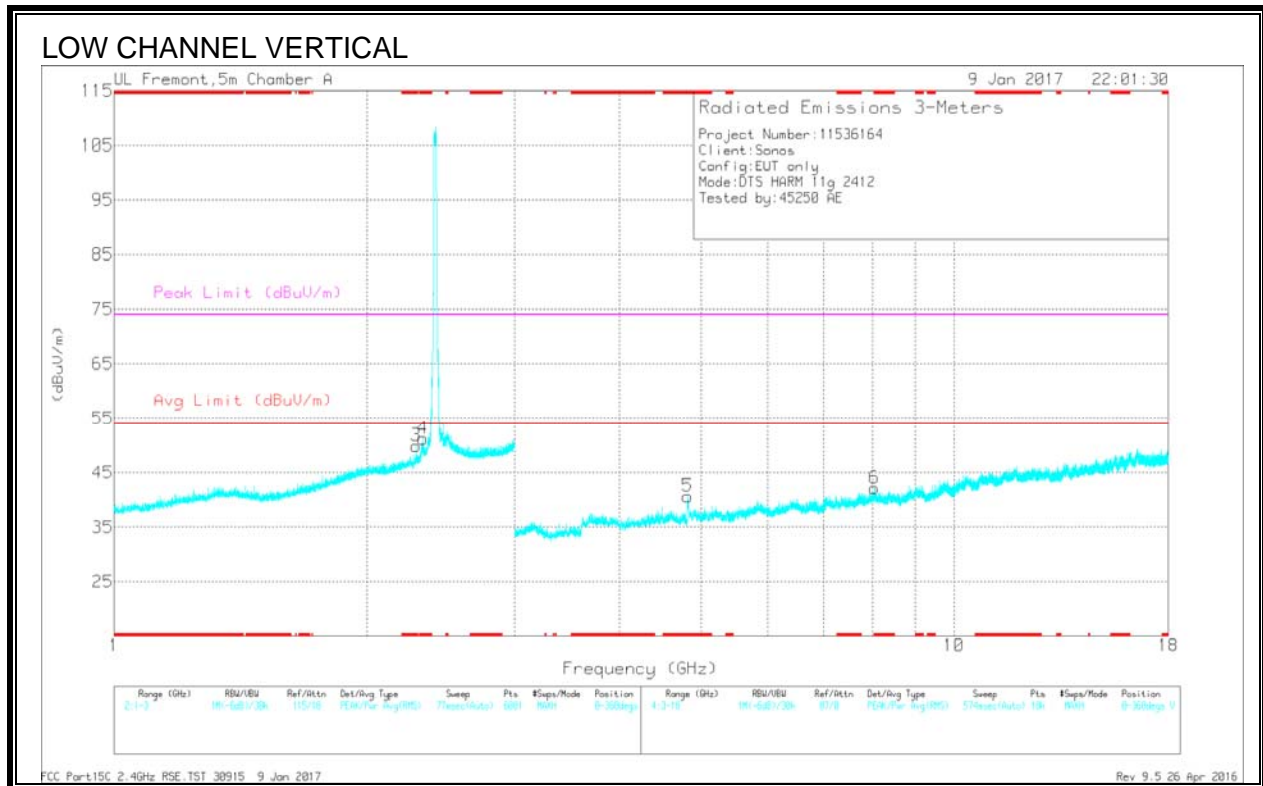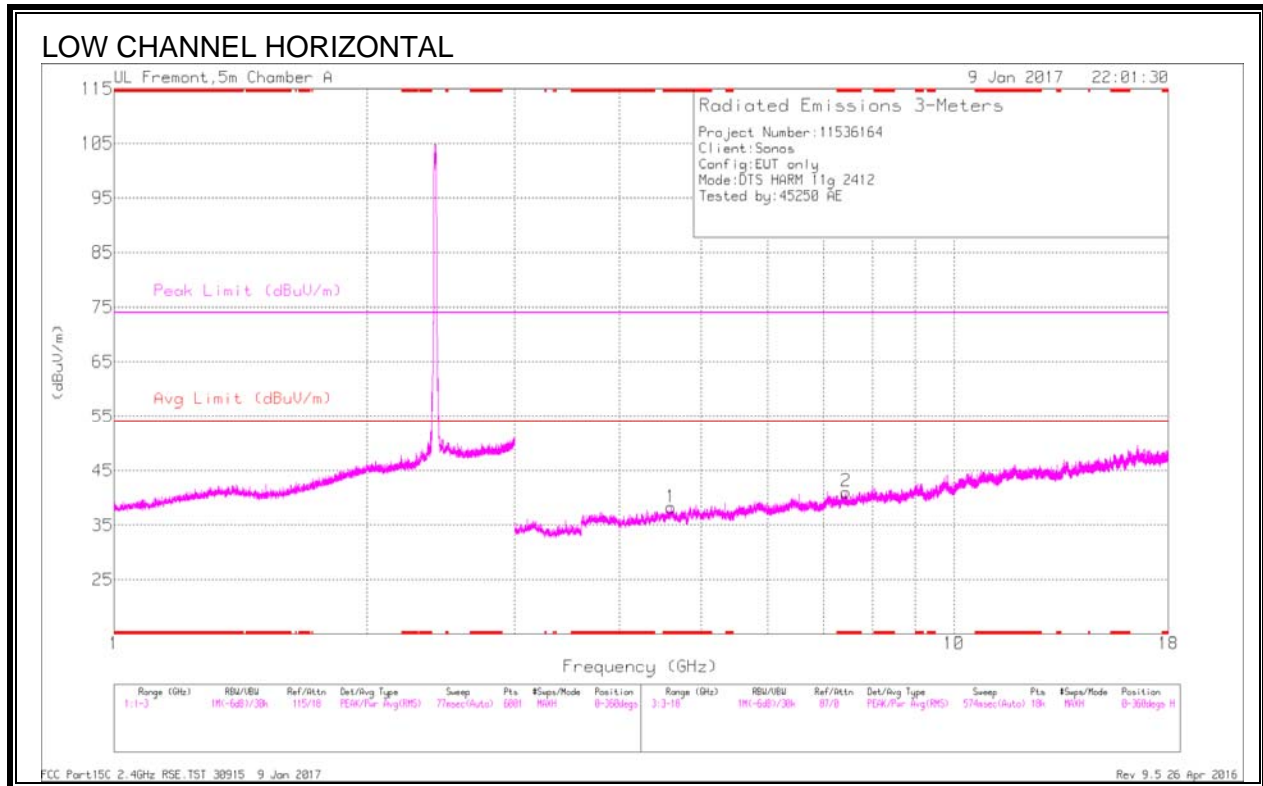



| Marker | Frequenc y (GHz) | Meter Reading (dBuV) | Det | AF T346 (db/m) | Amp/Cbi/Fitr/P ad (dB) | DC Corr (dB) | Correcte d Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|---------------------|----------------------------|-----|----------------|---------------------------|--------------|--------------------------------------|--------------------|----------------|---------------------|----------------------|-------------------|----------------|----------|
| 3 | * 2.288 | 42 | Pk | 31.8 | -23.9 | 0 | 49.9 | - | - | 74 | -24.1 | 0-360 | 199 | V |
| 4 | * 2.331 | 43.02 | Pk | 31.9 | -23.7 | 0 | 51.22 | - | - | 74 | -22.78 | 0-360 | 199 | V |
| 1 | * 4.602 | 32.29 | Pk | 34.4 | -28.4 | 0 | 32.29 | - | - | 74 | -35.71 | 0-360 | 101 | H |
| 2 | * 7.442 | 28.49 | Pk | 35.8 | -23.2 | 0 | 41.09 | - | - | 74 | -32.91 | 0-360 | 101 | H |
| 5 | * 4.82 | 34.64 | Pk | 34.3 | -28.3 | 0 | 40.64 | - | - | 74 | -33.36 | 0-360 | 101 | V |
| 6 | * 8.047 | 29.24 | Pk | 35.9 | -23 | 0 | 42.14 | - | - | 74 | -31.86 | 0-360 | 101 | V |

* - indicates frequency in CFR47 Pt 15 / RSS-Gen 8.10 Restricted Band
 Pk - Peak detector

| Frequenc y (GHz) | Meter Reading (dBuV) | Det | AF T346 (db/m) | Amp/Cbi/Fitr/P ad (dB) | DC Corr (dB) | Correcte d Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|---------------------|----------------------------|------|----------------|---------------------------|--------------|--------------------------------------|--------------------|----------------|---------------------|----------------------|-------------------|----------------|----------|
| * 2.288 | 48.32 | PK2 | 31.8 | -23.9 | 0 | 56.22 | - | - | 74 | -17.78 | 135 | 153 | V |
| * 2.288 | 37.91 | MAv1 | 31.8 | -23.9 | .4 | 46.21 | 54 | -7.79 | - | - | 135 | 153 | V |
| * 2.331 | 49.73 | PK2 | 31.9 | -23.7 | 0 | 57.93 | - | - | 74 | -16.07 | 175 | 196 | V |
| * 2.331 | 38.69 | MAv1 | 31.9 | -23.7 | .4 | 47.29 | 54 | -6.71 | - | - | 175 | 196 | V |
| * 4.602 | 37.29 | PK2 | 34.4 | -28.4 | 0 | 43.29 | - | - | 74 | -30.71 | 348 | 120 | H |
| * 4.602 | 27.9 | MAv1 | 34.4 | -28.4 | .4 | 34.3 | 54 | -19.7 | - | - | 348 | 120 | H |
| * 7.442 | 33.57 | PK2 | 35.8 | -23.2 | 0 | 46.17 | - | - | 74 | -27.83 | 358 | 106 | H |
| * 7.444 | 23.53 | MAv1 | 35.8 | -23.2 | .4 | 36.53 | 54 | -17.47 | - | - | 358 | 106 | H |
| * 4.82 | 41.91 | PK2 | 34.3 | -28.3 | 0 | 47.91 | - | - | 74 | -26.09 | 87 | 119 | V |
| * 4.82 | 30.15 | MAv1 | 34.3 | -28.3 | .4 | 36.55 | 54 | -17.45 | - | - | 87 | 119 | V |
| * 8.046 | 33.37 | PK2 | 35.9 | -23.1 | 0 | 46.17 | - | - | 74 | -27.83 | 10 | 215 | V |
| * 8.047 | 24 | MAv1 | 35.9 | -23.1 | .4 | 37.2 | 54 | -16.8 | - | - | 10 | 215 | V |

* - indicates frequency in CFR47 Pt 15 / RSS-Gen 8.10 Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS MID CHANNEL, CH 6)

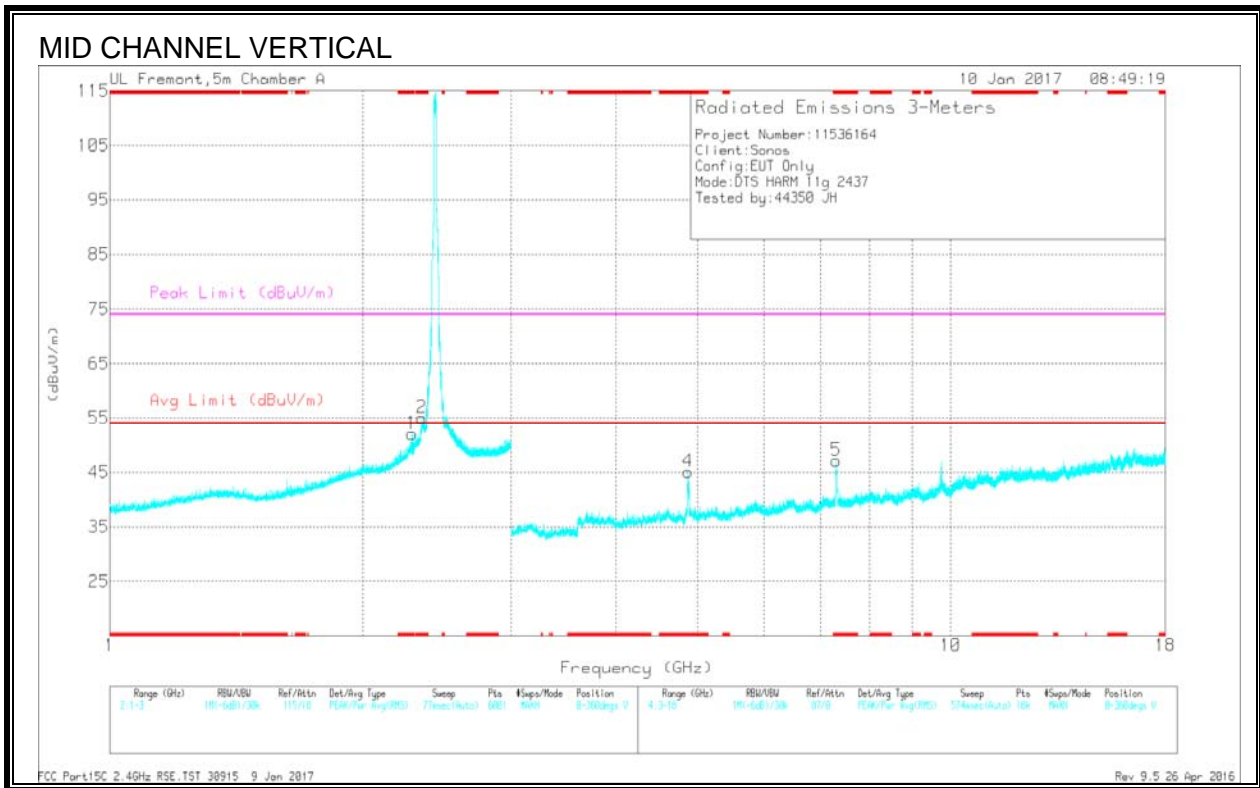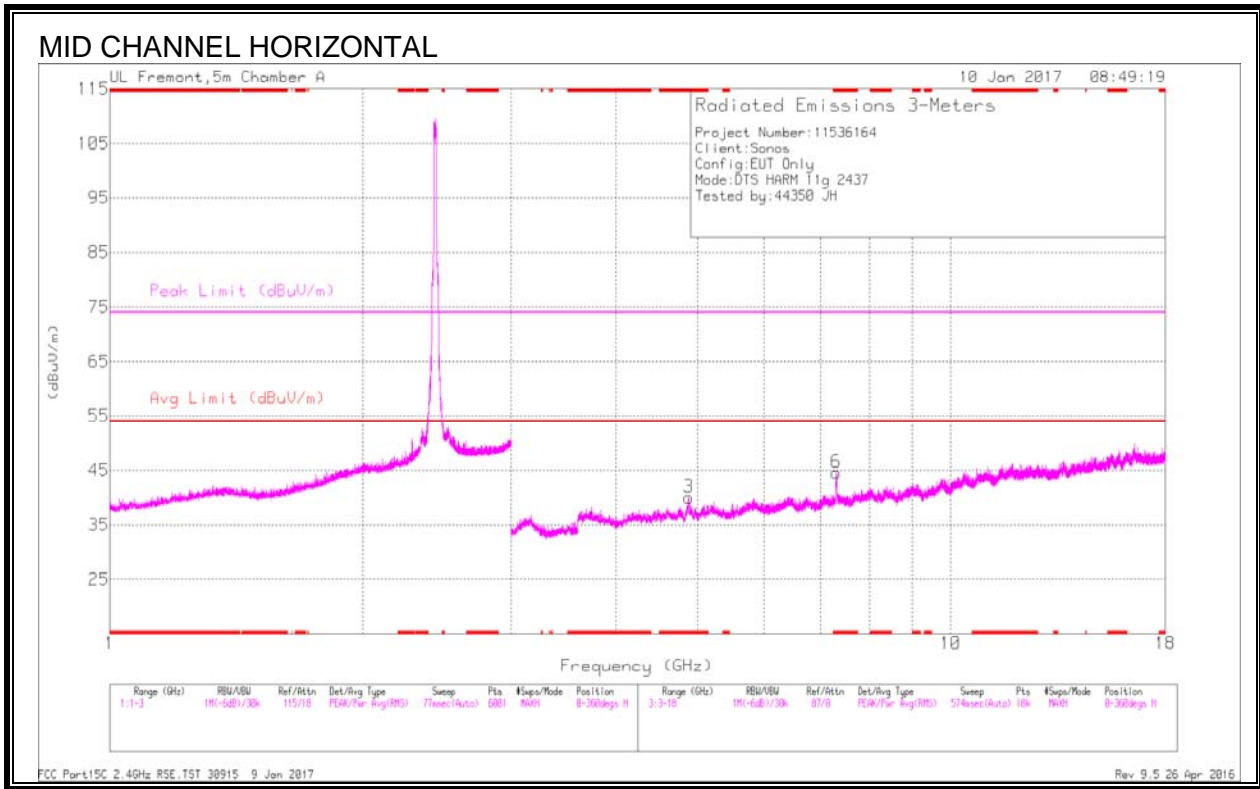



| Marker | Frequenc y (GHz) | Meter Reading (dBuV) | Det | AF T346 (db/m) | Amp/Cbl/Filtr/Pad (dB) | DC Corr (dB) | Correcte d Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|------------------------|----------------------------|-----|----------------|------------------------|--------------|--------------------------------------|--------------------|----------------|---------------------|----------------------|-------------------|----------------|----------|
| 1 | * 2.288 | 44.23 | Pk | 31.8 | -23.9 | 0 | 52.13 | - | - | 74 | -21.87 | 0-360 | 198 | V |
| 2 | * 2.35 | 46.72 | Pk | 32 | -23.7 | 0 | 55.02 | - | - | 74 | -18.98 | 0-360 | 101 | V |
| 3 | * 4.876 | 33.5 | Pk | 34.3 | -27.8 | 0 | 40 | - | - | 74 | -34 | 0-360 | 199 | H |
| 6 | * 7.311 | 33.89 | Pk | 35.7 | -25 | 0 | 44.59 | - | - | 74 | -29.41 | 0-360 | 199 | H |
| 4 | * 4.874 | 38.64 | Pk | 34.3 | -27.8 | 0 | 45.14 | - | - | 74 | -28.86 | 0-360 | 101 | V |
| 5 | * 7.314 | 36.4 | Pk | 35.7 | -25 | 0 | 47.1 | - | - | 74 | -26.9 | 0-360 | 101 | V |

* - indicates frequency in CFR47 Pt 15 / RSS-Gen 8.10 Restricted Band
 Pk - Peak detector

| Frequenc y (GHz) | Meter Reading (dBuV) | Det | AF T346 (db/m) | Amp/Cbl/Filtr/Pad (dB) | DC Corr (dB) | Correcte d Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|------------------------|----------------------------|------|----------------|------------------------|--------------|--------------------------------------|--------------------|----------------|---------------------|----------------------|-------------------|----------------|----------|
| * 2.288 | 49.4 | PK2 | 31.8 | -23.9 | 0 | 57.3 | - | - | 74 | -16.7 | 42 | 198 | V |
| * 2.288 | 39.83 | MAv1 | 31.8 | -23.9 | .4 | 48.13 | 54 | -5.87 | - | - | 42 | 198 | V |
| * 2.351 | 54.57 | PK2 | 32 | -23.7 | 0 | 62.87 | - | - | 74 | -11.13 | 152 | 159 | V |
| * 2.349 | 42.92 | MAv1 | 32 | -23.8 | .4 | 51.52 | 54 | -2.48 | - | - | 152 | 159 | V |
| * 4.874 | 41.71 | PK2 | 34.3 | -27.8 | 0 | 48.21 | - | - | 74 | -25.79 | 41 | 181 | H |
| * 4.874 | 30.39 | MAv1 | 34.3 | -27.8 | .4 | 37.29 | 54 | -16.71 | - | - | 41 | 181 | H |
| * 7.31 | 43.21 | PK2 | 35.7 | -25 | 0 | 53.91 | - | - | 74 | -20.09 | 13 | 111 | H |
| * 7.311 | 31.28 | MAv1 | 35.7 | -25 | .4 | 42.38 | 54 | -11.62 | - | - | 13 | 111 | H |
| * 4.875 | 47.55 | PK2 | 34.3 | -27.8 | 0 | 54.05 | - | - | 74 | -19.95 | 76 | 102 | V |
| * 4.874 | 36.99 | MAv1 | 34.3 | -27.8 | .4 | 43.89 | 54 | -10.11 | - | - | 76 | 102 | V |
| * 7.304 | 41.74 | PK2 | 35.7 | -25 | 0 | 52.44 | - | - | 74 | -21.56 | 192 | 139 | V |
| * 7.314 | 29.93 | MAv1 | 35.7 | -25 | .4 | 41.03 | 54 | -12.97 | - | - | 192 | 139 | V |

* - indicates frequency in CFR47 Pt 15 / RSS-Gen 8.10 Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS HIGH CHANNEL, CH 11)

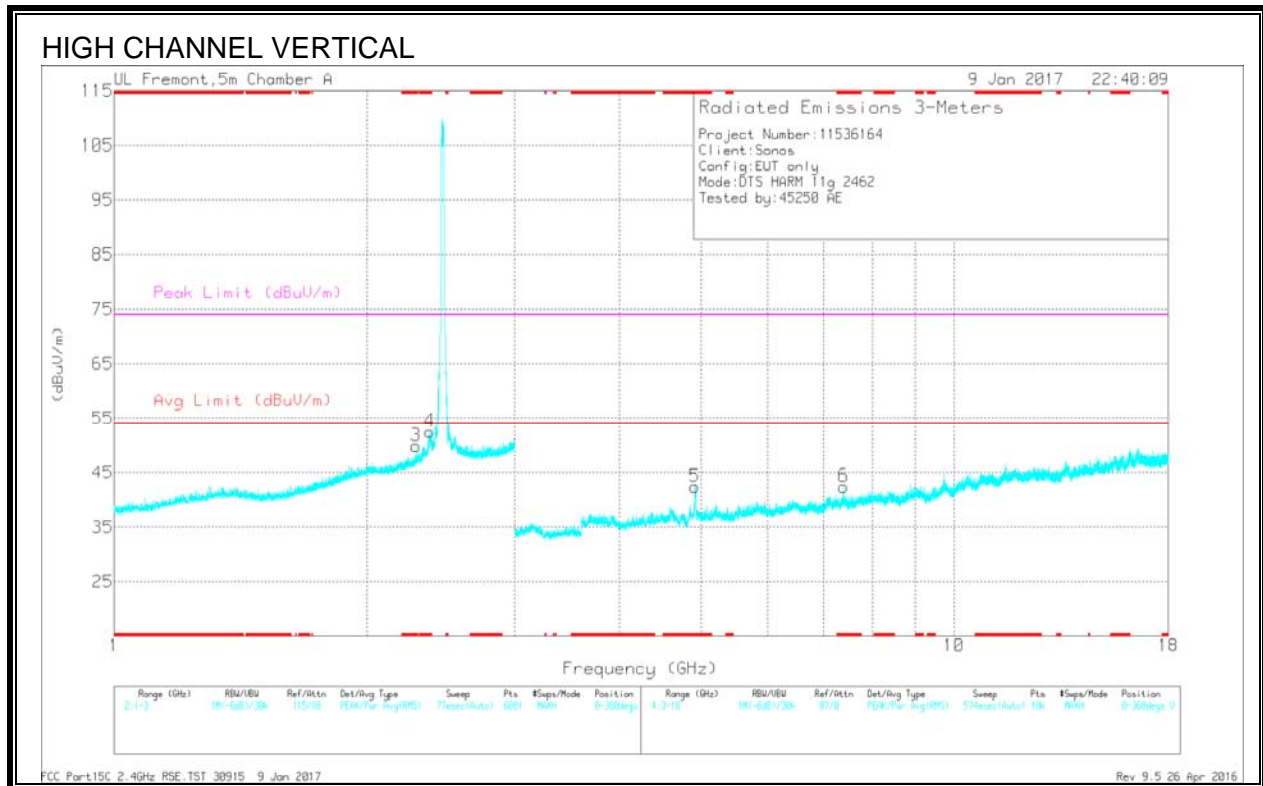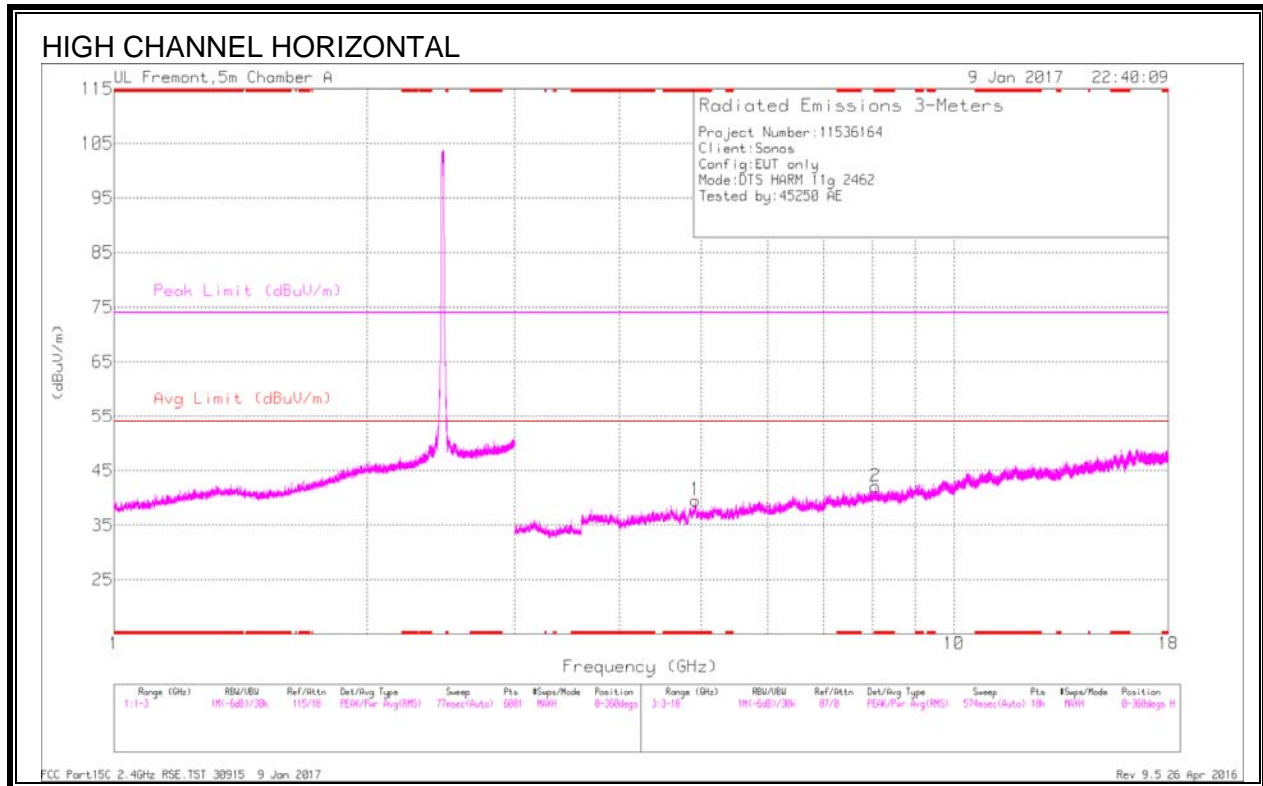

| Marker | Frequenc y (GHz) | Meter Reading (dBuV) | Det | AF T346 (db/m) | Amp/Cbi/Fitr/P ad (dB) | DC Corr (dB) | Correcte d Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|---------------------|----------------------------|-----|----------------|---------------------------|--------------|--------------------------------------|--------------------|----------------|---------------------|----------------------|-------------------|----------------|----------|
| 3 | * 2.288 | 42.01 | Pk | 31.8 | -23.9 | 0 | 49.91 | - | - | 74 | -24.09 | 0-360 | 199 | V |
| 4 | * 2.379 | 44.04 | Pk | 32.2 | -23.7 | 0 | 52.54 | - | - | 74 | -21.46 | 0-360 | 199 | V |
| 1 | * 4.922 | 32.95 | Pk | 34.3 | -27.7 | 0 | 39.55 | - | - | 74 | -34.45 | 0-360 | 101 | H |
| 2 | * 8.064 | 28.9 | Pk | 35.9 | -22.7 | 0 | 42.1 | - | - | 74 | -31.9 | 0-360 | 199 | H |
| 5 | * 4.918 | 35.79 | Pk | 34.3 | -27.7 | 0 | 42.39 | - | - | 74 | -31.61 | 0-360 | 101 | V |
| 6 | * 7.387 | 30.65 | Pk | 35.7 | -23.9 | 0 | 42.45 | - | - | 74 | -31.55 | 0-360 | 101 | V |


* - indicates frequency in CFR47 Pt 15 / RSS-Gen 8.10 Restricted Band
 Pk - Peak detector

| Frequenc y (GHz) | Meter Reading (dBuV) | Det | AF T346 (db/m) | Amp/Cbi/Fitr/P ad (dB) | DC Corr (dB) | Correcte d Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|---------------------|----------------------------|------|----------------|---------------------------|--------------|--------------------------------------|--------------------|----------------|---------------------|----------------------|-------------------|----------------|----------|
| * 2.288 | 47.47 | PK2 | 31.8 | -23.9 | 0 | 55.37 | - | - | 74 | -18.63 | 68 | 110 | V |
| * 2.288 | 38.12 | MAv1 | 31.8 | -23.9 | .4 | 46.42 | 54 | -7.58 | - | - | 68 | 110 | V |
| * 2.379 | 51.64 | PK2 | 32.2 | -23.7 | 0 | 60.14 | - | - | 74 | -13.86 | 153 | 178 | V |
| * 2.378 | 40.87 | MAv1 | 32.2 | -23.7 | .4 | 49.77 | 54 | -4.23 | - | - | 153 | 178 | V |
| * 4.921 | 39.7 | PK2 | 34.3 | -27.6 | 0 | 46.4 | - | - | 74 | -27.6 | 8 | 281 | H |
| * 4.923 | 28.72 | MAv1 | 34.3 | -27.7 | .4 | 35.72 | 54 | -18.28 | - | - | 8 | 281 | H |
| * 8.062 | 33.13 | PK2 | 35.9 | -22.7 | 0 | 46.33 | - | - | 74 | -27.67 | 36 | 212 | H |
| * 8.064 | 23.82 | MAv1 | 35.9 | -22.7 | .4 | 37.42 | 54 | -16.58 | - | - | 36 | 212 | H |
| * 4.92 | 43.77 | PK2 | 34.3 | -27.6 | 0 | 50.47 | - | - | 74 | -23.53 | 52 | 128 | V |
| * 4.92 | 31.53 | MAv1 | 34.3 | -27.6 | .4 | 38.63 | 54 | -15.37 | - | - | 52 | 128 | V |
| * 7.387 | 36.95 | PK2 | 35.7 | -23.9 | 0 | 48.75 | - | - | 74 | -25.25 | 141 | 103 | V |
| * 7.387 | 25.63 | MAv1 | 35.7 | -23.9 | .4 | 37.83 | 54 | -16.17 | - | - | 141 | 103 | V |

* - indicates frequency in CFR47 Pt 15 / RSS-Gen 8.10 Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

11.2.3. 11n HT20 3TX CDD MIMO MODE IN THE 2.4GHZ BAND

AUTHORIZED BANDEDGE (LOW CHANNEL, CH 1)

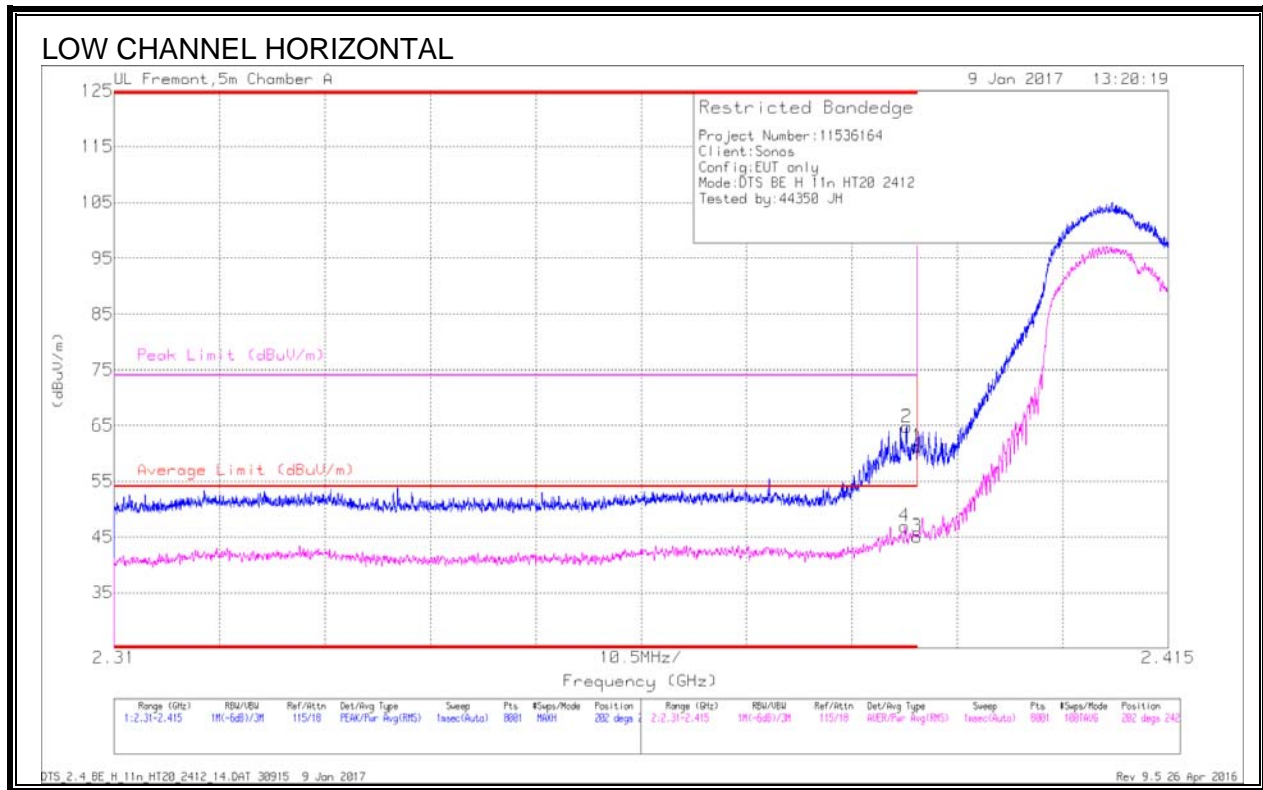


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T346 (db/m) | Amp/Cb/Filt/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|----------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1 | * 2.39 | 52.6 | Pk | 32.3 | -23.7 | 0 | 61.2 | - | - | 74 | -12.8 | 202 | 242 | H |
| 2 | * 2.389 | 56.11 | Pk | 32.3 | -23.7 | 0 | 64.71 | - | - | 74 | -9.29 | 202 | 242 | H |
| 3 | * 2.39 | 36.34 | RMS | 32.3 | -23.7 | .12 | 45.06 | 54 | -8.94 | - | - | 202 | 242 | H |
| 4 | * 2.389 | 38.16 | RMS | 32.3 | -23.7 | .12 | 46.88 | 54 | -7.12 | - | - | 202 | 242 | H |

* - indicates frequency in CFR47 Pt 15 / RSS-Gen 8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection

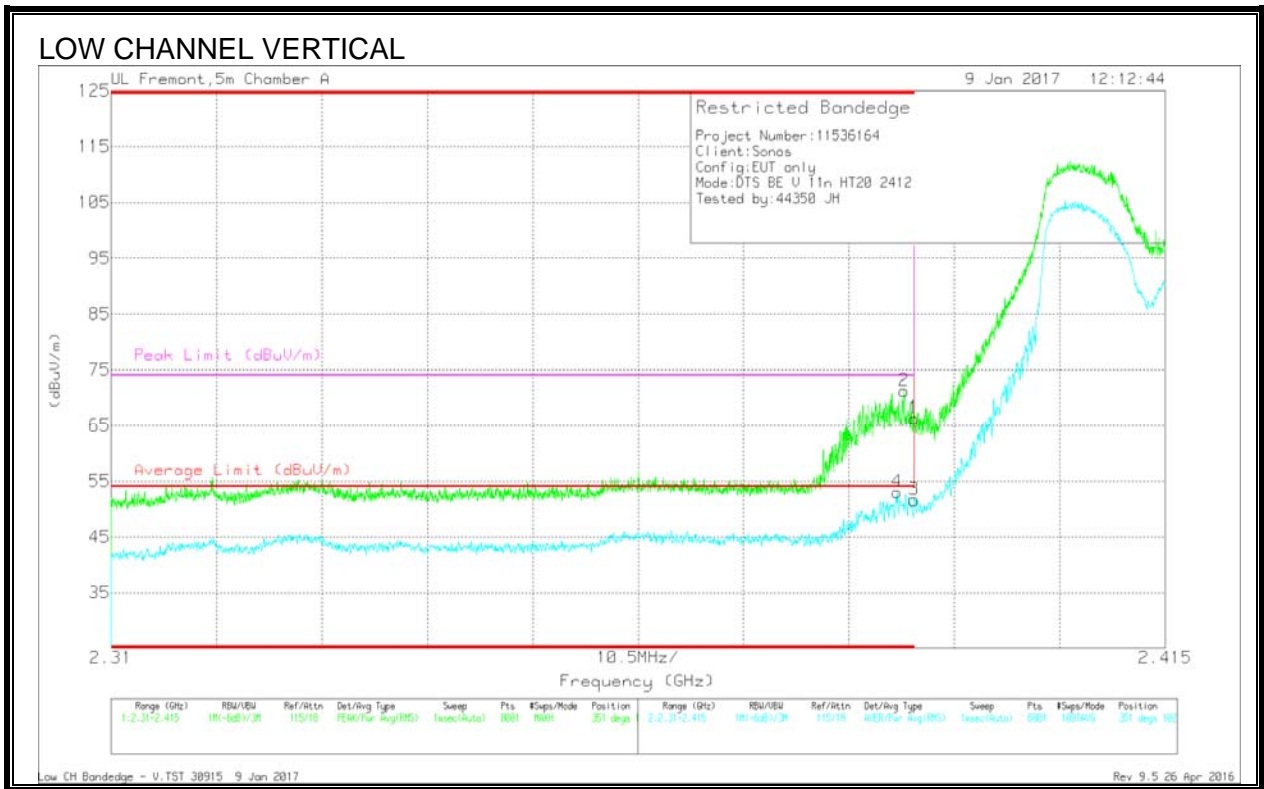


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T346 (db/m) | Amp/Cb/Filt/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|----------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1 | * 2.39 | 57.67 | Pk | 32.3 | -23.7 | 0 | 66.27 | - | - | 74 | -7.73 | 351 | 102 | V |
| 2 | * 2.389 | 62.62 | Pk | 32.3 | -23.7 | 0 | 71.22 | - | - | 74 | -2.78 | 351 | 102 | V |
| 3 | * 2.39 | 42.9 | RMS | 32.3 | -23.7 | .12 | 51.62 | 54 | -2.38 | - | - | 351 | 102 | V |
| 4 | * 2.388 | 44.29 | RMS | 32.3 | -23.7 | .12 | 53.01 | 54 | - .99 | - | - | 351 | 102 | V |

* - indicates frequency in CFR47 Pt 15 / RSS-Gen 8.10 Restricted Band

Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEGE (HIGH CHANNEL, CH 11)

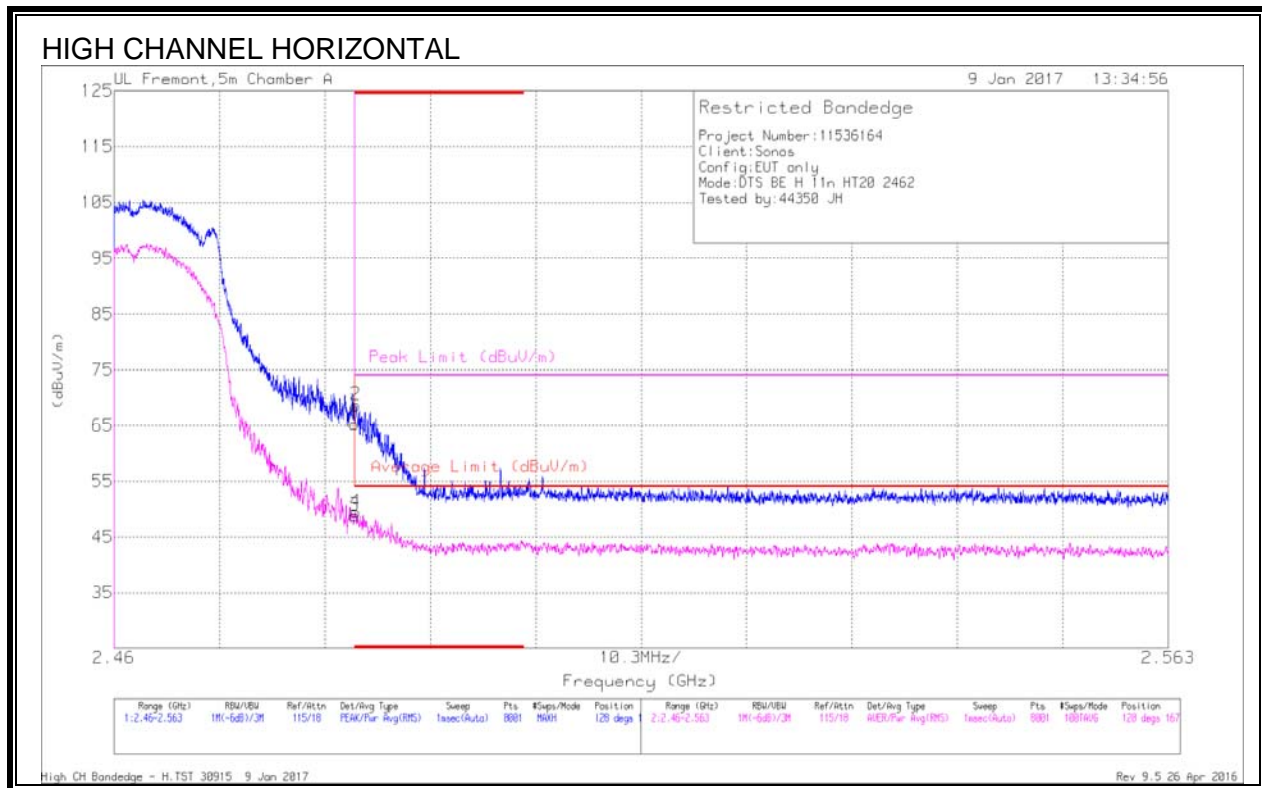


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T346 (db/m) | Amp/Cbl/Filt/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-----------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1 | * 2.484 | 56.43 | Pk | 32.4 | -23.6 | 0 | 65.23 | - | - | 74 | -8.77 | 128 | 167 | H |
| 2 | * 2.484 | 59.89 | Pk | 32.4 | -23.6 | 0 | 68.69 | - | - | 74 | -5.31 | 128 | 167 | H |
| 3 | * 2.484 | 39.92 | RMS | 32.4 | -23.6 | 12 | 48.84 | 54 | -5.16 | - | - | 128 | 167 | H |
| 4 | * 2.484 | 40.52 | RMS | 32.4 | -23.6 | 12 | 49.44 | 54 | -4.56 | - | - | 128 | 167 | H |

* - indicates frequency in CFR47 Pt 15 / RSS-Gen 8.10 Restricted Band

Pk - Peak detector



RMS - RMS detection

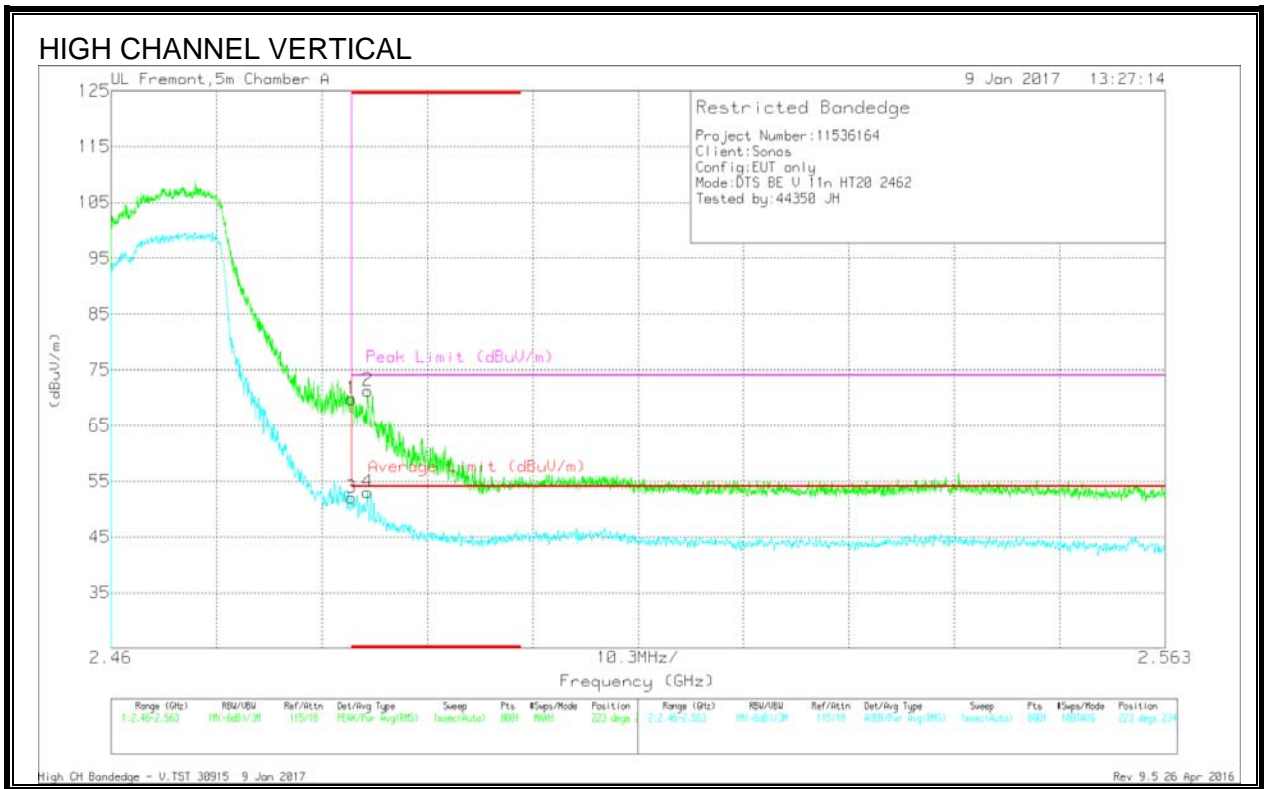

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T346 (db/m) | Amp/Cb/Filt/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|----------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1 | * 2.484 | 61.02 | Pk | 32.4 | -23.6 | 0 | 69.82 | - | - | 74 | -4.18 | 223 | 234 | V |
| 2 | * 2.485 | 62.57 | Pk | 32.4 | -23.7 | 0 | 71.27 | - | - | 74 | -2.73 | 223 | 234 | V |
| 3 | * 2.484 | 43.11 | RMS | 32.4 | -23.6 | .12 | 52.03 | 54 | -1.97 | - | - | 223 | 234 | V |
| 4 | * 2.485 | 44.19 | RMS | 32.4 | -23.7 | .12 | 53.01 | 54 | -1.99 | - | - | 223 | 234 | V |

* - indicates frequency in CFR47 Pt 15 / RSS-Gen 8.10 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS LOW CHANNEL, CH 1)

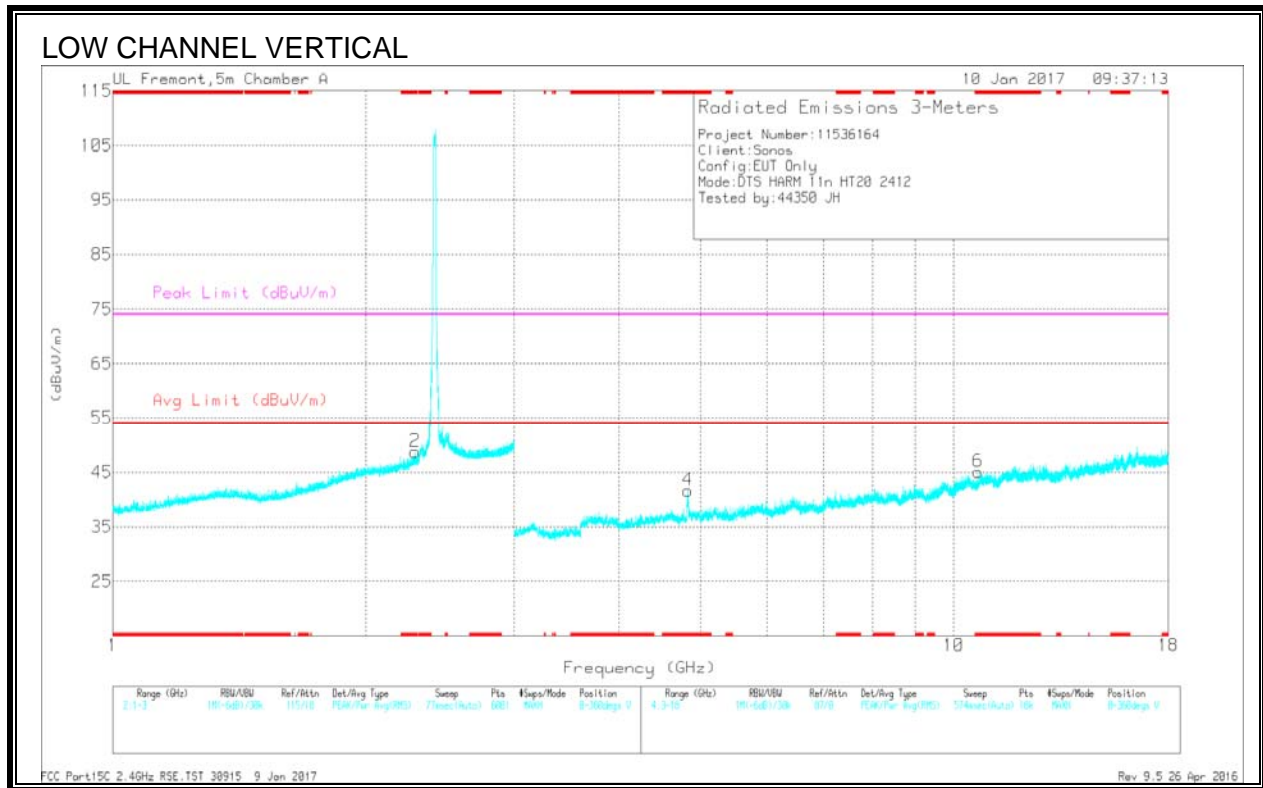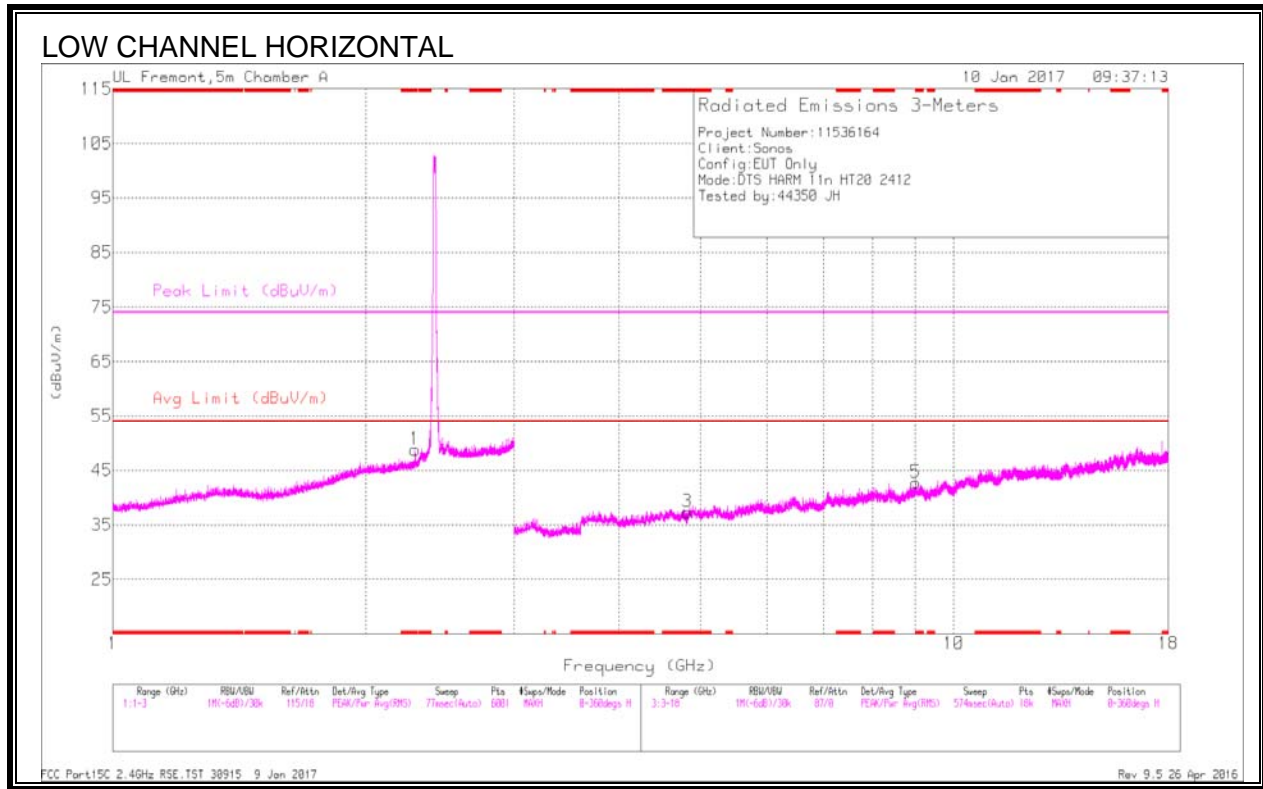



| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T346 (db/m) | Amp/Cbl/Filtr/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|------------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1 | * 2.288 | 40.9 | Pk | 31.8 | -23.9 | 0 | 48.8 | - | - | 74 | -25.2 | 0-360 | 101 | H |
| 2 | * 2.288 | 40.93 | Pk | 31.8 | -23.9 | 0 | 48.83 | - | - | 74 | -25.17 | 0-360 | 101 | V |
| 3 | * 4.822 | 31.3 | Pk | 34.3 | -28.2 | 0 | 37.4 | - | - | 74 | -36.6 | 0-360 | 199 | H |
| 5 | * 9.014 | 28.71 | Pk | 36.1 | -22.1 | 0 | 42.71 | - | - | 74 | -31.29 | 0-360 | 101 | H |
| 4 | * 4.826 | 35.43 | Pk | 34.3 | -28.1 | 0 | 41.63 | - | - | 74 | -32.37 | 0-360 | 101 | V |
| 6 | * 10.694 | 27.84 | Pk | 37.7 | -20.5 | 0 | 45.04 | - | - | 74 | -28.96 | 0-360 | 101 | V |

* - indicates frequency in CFR47 Pt 15 / RSS-Gen 8.10 Restricted Band
 Pk - Peak detector

| Frequency (GHz) | Meter Reading (dBuV) | Det | AF T346 (db/m) | Amp/Cbl/Filtr/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|------------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 2.289 | 46.11 | PK2 | 31.8 | -23.9 | 0 | 54.01 | - | - | 74 | -19.99 | 9 | 142 | H |
| * 2.288 | 36.64 | MAv1 | 31.8 | -23.9 | .12 | 44.66 | 54 | -9.34 | - | - | 9 | 142 | H |
| * 2.288 | 47.81 | PK2 | 31.8 | -23.9 | 0 | 55.71 | - | - | 74 | -18.29 | 164 | 142 | V |
| * 2.288 | 38.23 | MAv1 | 31.8 | -23.9 | .12 | 46.25 | 54 | -7.75 | - | - | 164 | 142 | V |
| * 4.824 | 38.29 | PK2 | 34.3 | -28.2 | 0 | 44.39 | - | - | 74 | -29.61 | 43 | 364 | H |
| * 4.824 | 27.16 | MAv1 | 34.3 | -28.2 | .12 | 33.38 | 54 | -20.62 | - | - | 43 | 364 | H |
| * 9.015 | 34.45 | PK2 | 36.1 | -22.1 | 0 | 48.45 | - | - | 74 | -25.55 | 296 | 120 | H |
| * 9.014 | 23.22 | MAv1 | 36.1 | -22.1 | .12 | 37.34 | 54 | -16.66 | - | - | 296 | 120 | H |
| * 4.827 | 42.97 | PK2 | 34.3 | -28.1 | 0 | 49.17 | - | - | 74 | -24.83 | 153 | 139 | V |
| * 4.827 | 29.56 | MAv1 | 34.3 | -28.1 | .12 | 35.88 | 54 | -18.12 | - | - | 153 | 139 | V |
| * 10.696 | 32.24 | PK2 | 37.7 | -20.5 | 0 | 49.44 | - | - | 74 | -24.56 | 0 | 347 | V |
| * 10.68 | 21.83 | MAv1 | 37.7 | -20.6 | .12 | 39.05 | 54 | -14.95 | - | - | 0 | 347 | V |

* - indicates frequency in CFR47 Pt 15 / RSS-Gen 8.10 Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS MID CHANNEL, CH 6)

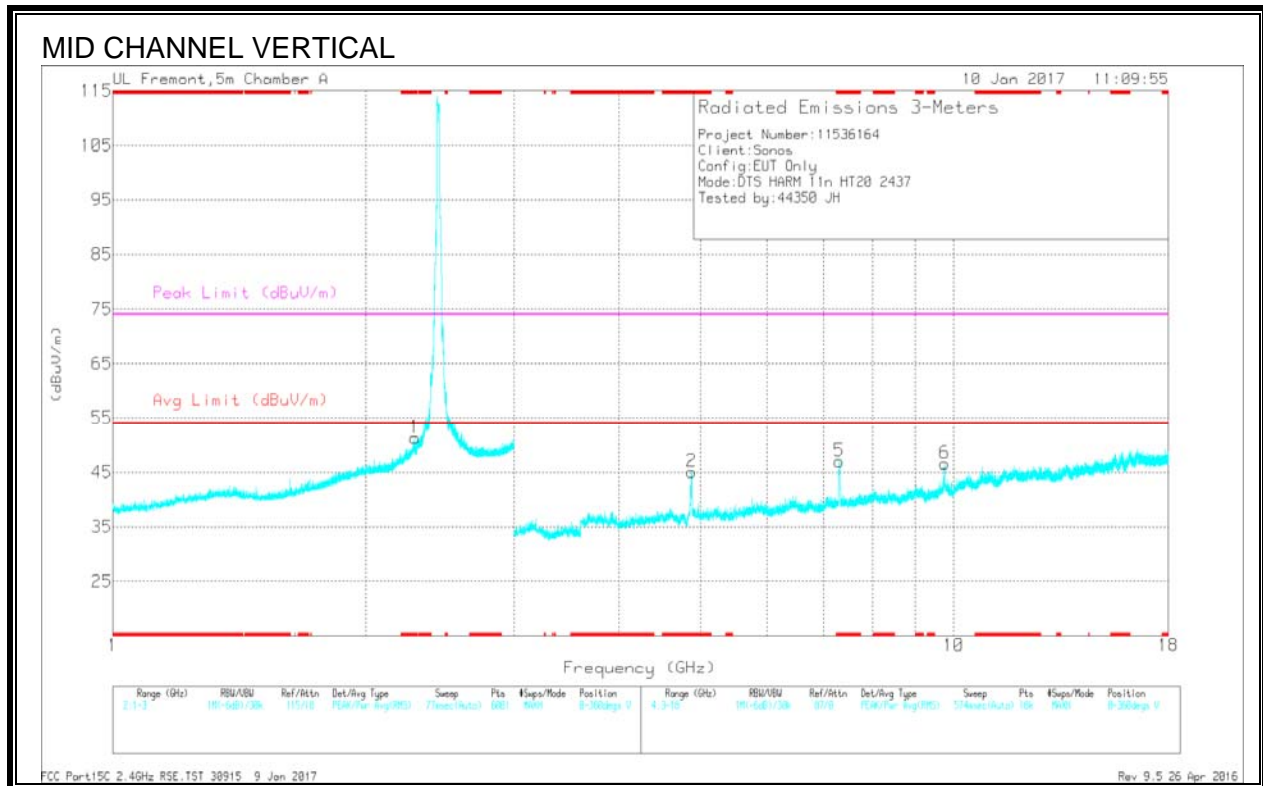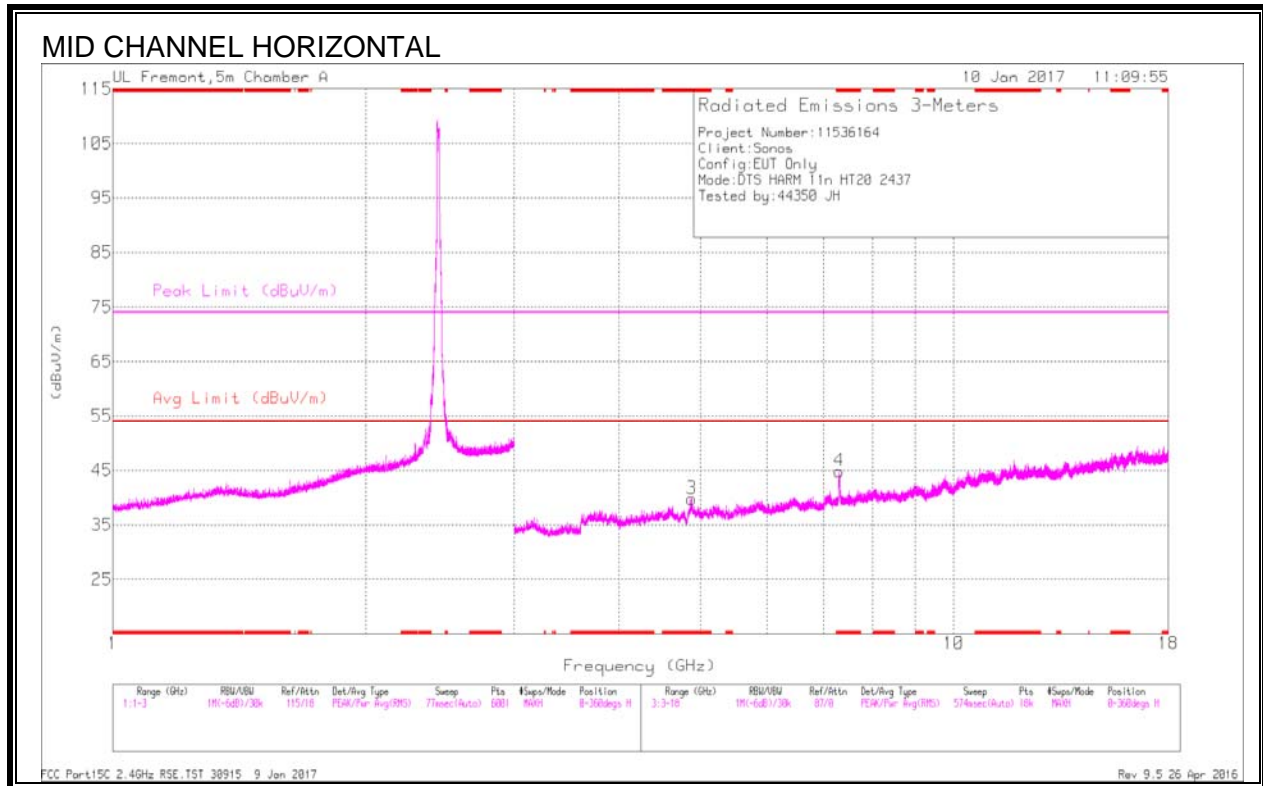



| Marker | Frequenc y (GHz) | Meter Reading (dBuV) | Det | AF T346 (db/m) | Amp/CbI/Filtr/P ad (dB) | DC Corr (dB) | Correcte d Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|------------------------|----------------------------|-----|----------------|----------------------------|--------------|--------------------------------------|--------------------|----------------|---------------------|----------------------|-------------------|----------------|----------|
| 1 | * 2.288 | 43.4 | Pk | 31.8 | -23.9 | 0 | 51.3 | - | - | 74 | -22.7 | 0-360 | 199 | V |
| 3 | * 4.876 | 33.28 | Pk | 34.3 | -27.8 | 0 | 39.78 | - | - | 74 | -34.22 | 0-360 | 101 | H |
| 4 | * 7.312 | 34.19 | Pk | 35.7 | -25 | 0 | 44.89 | - | - | 74 | -29.11 | 0-360 | 101 | H |
| 2 | * 4.876 | 38.65 | Pk | 34.3 | -27.8 | 0 | 45.15 | - | - | 74 | -28.85 | 0-360 | 101 | V |
| 5 | * 7.315 | 36.26 | Pk | 35.7 | -25 | 0 | 46.96 | - | - | 74 | -27.04 | 0-360 | 101 | V |
| 6 | 9.755 | 31.07 | Pk | 36.7 | -21.2 | 0 | 46.57 | - | - | - | - | 0-360 | 199 | V |

* - indicates frequency in CFR47 Pt 15 / RSS-Gen 8.10 Restricted Band
 Pk - Peak detector

| Frequenc y (GHz) | Meter Reading (dBuV) | Det | AF T346 (db/m) | Amp/CbI/Filtr/P ad (dB) | DC Corr (dB) | Correcte d Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|------------------------|----------------------------|------|----------------|----------------------------|--------------|--------------------------------------|--------------------|----------------|---------------------|----------------------|-------------------|----------------|----------|
| * 2.288 | 49.94 | PK2 | 31.8 | -23.9 | 0 | 57.84 | - | - | 74 | -16.16 | 53 | 199 | V |
| * 2.288 | 40.22 | MAv1 | 31.8 | -23.9 | .12 | 48.24 | 54 | -5.76 | - | - | 53 | 199 | V |
| * 4.875 | 41.14 | PK2 | 34.3 | -27.8 | 0 | 47.64 | - | - | 74 | -26.36 | 11 | 143 | H |
| * 4.874 | 29.64 | MAv1 | 34.3 | -27.8 | .12 | 36.26 | 54 | -17.74 | - | - | 11 | 143 | H |
| * 7.303 | 43.31 | PK2 | 35.7 | -25 | 0 | 54.01 | - | - | 74 | -19.99 | 19 | 126 | H |
| * 7.311 | 30.97 | MAv1 | 35.7 | -25 | .12 | 41.79 | 54 | -12.21 | - | - | 19 | 126 | H |
| * 4.875 | 47.33 | PK2 | 34.3 | -27.8 | 0 | 53.83 | - | - | 74 | -20.17 | 81 | 123 | V |
| * 4.876 | 36.21 | MAv1 | 34.3 | -27.8 | .12 | 42.83 | 54 | -11.17 | - | - | 81 | 123 | V |
| * 7.316 | 42.91 | PK2 | 35.7 | -25 | 0 | 53.61 | - | - | 74 | -20.39 | 141 | 106 | V |
| * 7.314 | 32.84 | MAv1 | 35.7 | -25 | .12 | 43.66 | 54 | -10.34 | - | - | 141 | 106 | V |
| 9.732 | 39.98 | PK2 | 36.6 | -21.2 | 0 | 55.38 | - | - | - | - | 110 | 220 | V |
| 9.755 | 27.07 | MAv1 | 36.7 | -21.2 | .12 | 42.69 | - | - | - | - | 110 | 220 | V |

* - indicates frequency in CFR47 Pt 15 / RSS-Gen 8.10 Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS HIGH CHANNEL, CH 11)

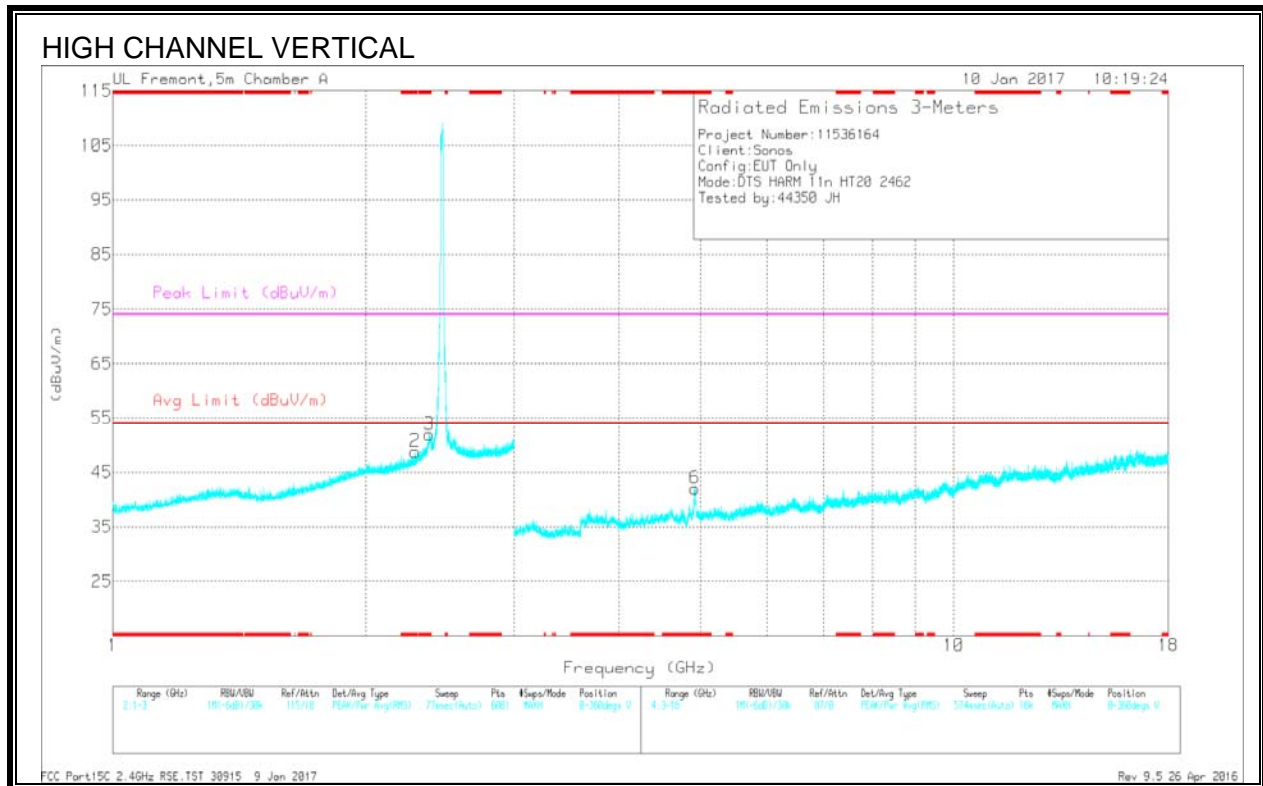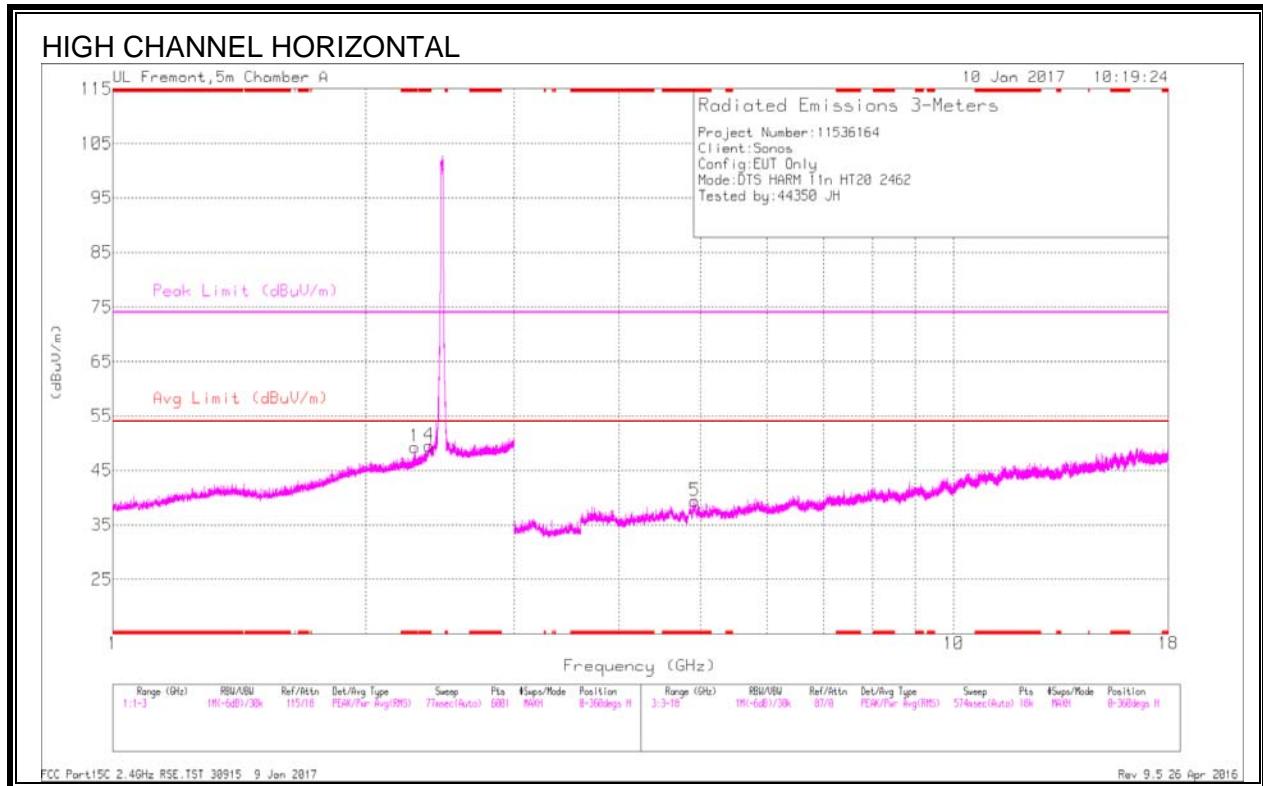

| Marker | Frequenc y (GHz) | Meter Reading (dBuV) | Det | AF T346 (db/m) | Amp/Cbi/Filtr/P ad (dB) | DC Corr (dB) | Correcte d Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|---------------------|----------------------------|-----|----------------|----------------------------|--------------|--------------------------------------|--------------------|----------------|---------------------|----------------------|-------------------|----------------|----------|
| 1 | * 2.288 | 41.39 | Pk | 31.8 | -23.9 | 0 | 43.29 | - | - | 74 | -24.71 | 0-360 | 101 | H |
| 4 | * 2.38 | 41.06 | Pk | 32.2 | -23.7 | 0 | 43.56 | - | - | 74 | -24.44 | 0-360 | 101 | H |
| 2 | * 2.288 | 40.91 | Pk | 31.8 | -23.9 | 0 | 43.81 | - | - | 74 | -25.19 | 0-360 | 201 | V |
| 3 | * 2.377 | 43.45 | Pk | 32.2 | -23.7 | 0 | 51.95 | - | - | 74 | -22.05 | 0-360 | 101 | V |
| 5 | * 4.92 | 32.67 | Pk | 34.3 | -27.6 | 0 | 39.37 | - | - | 74 | -34.63 | 0-360 | 101 | H |
| 6 | * 4.924 | 35.59 | Pk | 34.3 | -27.8 | 0 | 42.09 | - | - | 74 | -31.91 | 0-360 | 101 | V |



* - indicates frequency in CFR47 Pt 15 / RSS-Gen 8.10 Restricted Band
 Pk - Peak detector

| Frequenc y (GHz) | Meter Reading (dBuV) | Det | AF T346 (db/m) | Amp/Cbi/Filtr/P ad (dB) | DC Corr (dB) | Correcte d Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|---------------------|----------------------------|------|----------------|----------------------------|--------------|--------------------------------------|--------------------|----------------|---------------------|----------------------|-------------------|----------------|----------|
| * 2.288 | 45.69 | PK2 | 31.8 | -23.9 | 0 | 53.59 | - | - | 74 | -20.41 | 8 | 105 | H |
| * 2.288 | 36.83 | MAv1 | 31.8 | -23.9 | .12 | 44.85 | 54 | -9.15 | - | - | 8 | 105 | H |
| * 2.379 | 47.27 | PK2 | 32.2 | -23.7 | 0 | 55.77 | - | - | 74 | -18.23 | 357 | 185 | H |
| * 2.378 | 36.5 | MAv1 | 32.2 | -23.7 | .12 | 45.12 | 54 | -8.88 | - | - | 357 | 185 | H |
| * 2.288 | 46.78 | PK2 | 31.8 | -23.9 | 0 | 54.68 | - | - | 74 | -19.32 | 64 | 151 | V |
| * 2.288 | 37.1 | MAv1 | 31.8 | -23.9 | .12 | 45.12 | 54 | -8.88 | - | - | 64 | 151 | V |
| * 2.377 | 50.29 | PK2 | 32.2 | -23.7 | 0 | 58.79 | - | - | 74 | -15.21 | 317 | 103 | V |
| * 2.376 | 39.35 | MAv1 | 32.2 | -23.7 | .12 | 47.97 | 54 | -6.03 | - | - | 317 | 103 | V |
| * 4.921 | 39.08 | PK2 | 34.3 | -27.6 | 0 | 45.78 | - | - | 74 | -28.22 | 5 | 124 | H |
| * 4.921 | 28.21 | MAv1 | 34.3 | -27.6 | .12 | 35.03 | 54 | -18.97 | - | - | 5 | 124 | H |
| * 4.924 | 46.12 | PK2 | 34.3 | -27.8 | 0 | 52.62 | - | - | 74 | -21.38 | 77 | 112 | V |
| * 4.923 | 32.15 | MAv1 | 34.3 | -27.7 | .12 | 38.87 | 54 | -15.13 | - | - | 77 | 112 | V |

* - indicates frequency in CFR47 Pt 15 / RSS-Gen 8.10 Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

11.3. WORST-CASE BELOW 30 GHz

SPURIOUS EMISSIONS 9 KHz to 30 MHz (WORST-CASE CONFIGURATION)

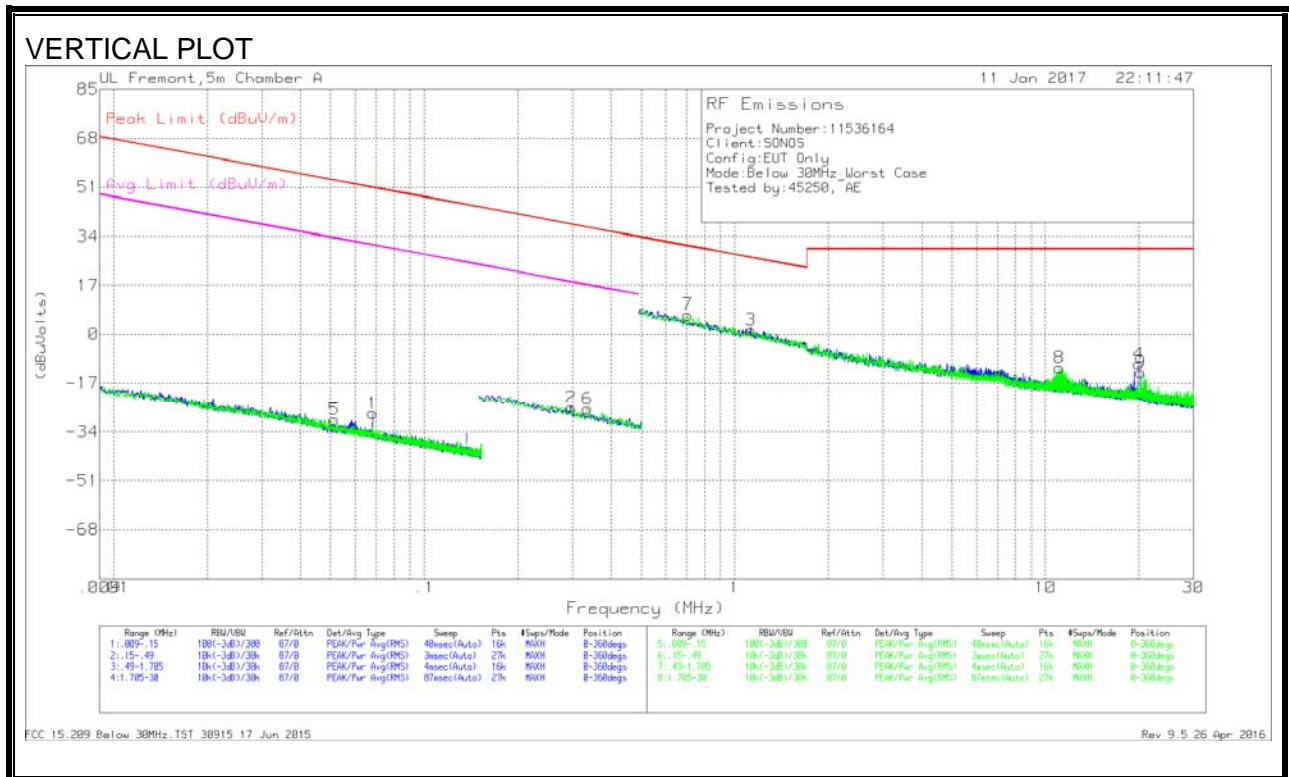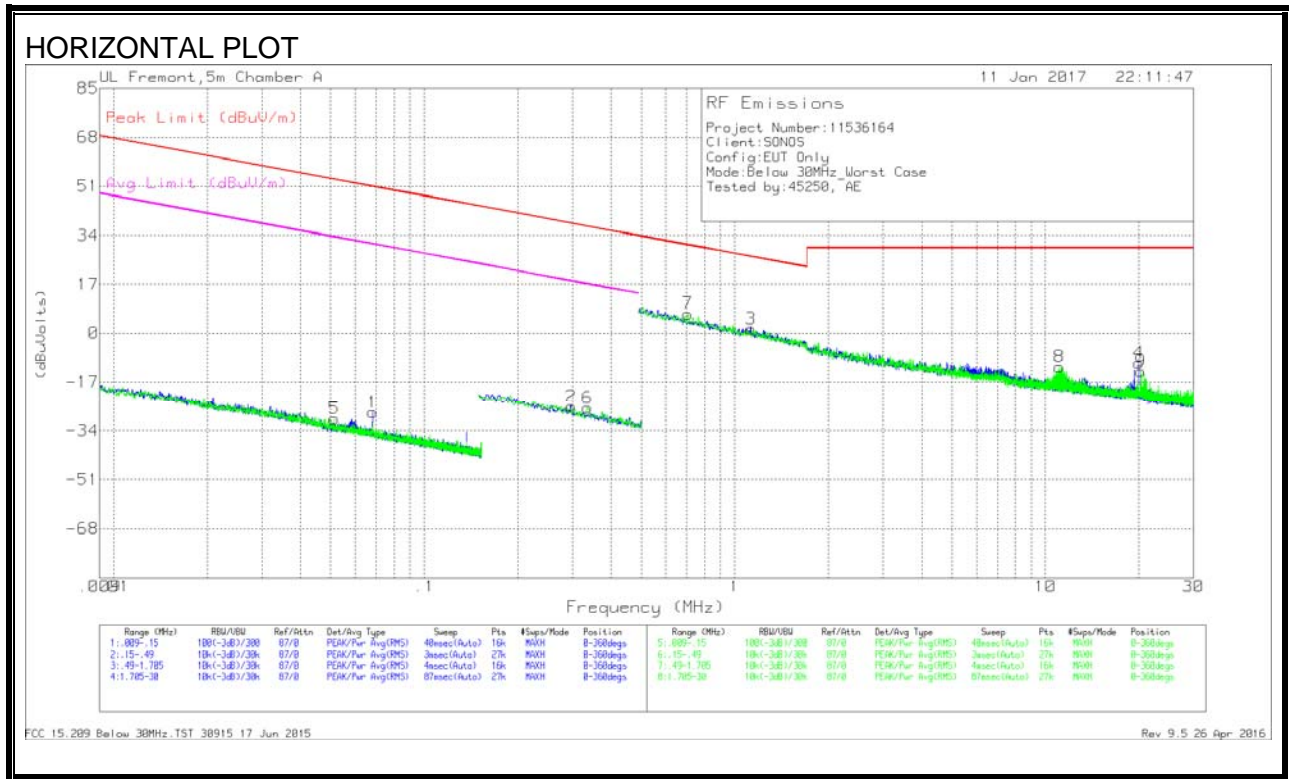

DATA

Trace Markers

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | Loop Antenna (dB/m) | Cbl (dB) | Dist Corr 300m | Corrected Reading (dBuVolts) | Peak Limit (dBuV/m) | Margin (dB) | Avg Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) |
|--------|-----------------|----------------------|-----|---------------------|----------|----------------|------------------------------|---------------------|-------------|--------------------|-------------|----------------|
| 5 | .05127 | 38.74 | Pk | 11.3 | .1 | -80 | -29.86 | 53.41 | -83.27 | 33.41 | -63.27 | 0-360 |
| 1 | .06817 | 41.14 | Pk | 11 | .1 | -80 | -27.76 | 50.93 | -78.69 | 30.93 | -58.69 | 0-360 |
| 2 | .29746 | 43.52 | Pk | 10.8 | .1 | -80 | -25.58 | 38.14 | -63.72 | 18.14 | -43.72 | 0-360 |
| 6 | .33526 | 43.08 | Pk | 10.7 | .1 | -80 | -26.12 | 37.1 | -63.22 | 17.1 | -43.22 | 0-360 |



Pk - Peak detector

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | Loop Antenna (dB/m) | Cbl (dB) | Dist Corr 30m | Corrected Reading (dBuVolts) | Peak Limit (dBuV/m) | Margin (dB) | Avg Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) |
|--------|-----------------|----------------------|-----|---------------------|----------|---------------|------------------------------|---------------------|-------------|--------------------|-------------|----------------|
| 7 | .70565 | 36.09 | Pk | 10.6 | .1 | -40 | 6.79 | 30.63 | -23.84 | - | - | 0-360 |
| 3 | 1.1265 | 30.56 | Pk | 10.7 | .2 | -40 | 1.46 | 26.57 | -25.11 | - | - | 0-360 |
| 8 | 11.10242 | 16.99 | Pk | 10.8 | .5 | -40 | -11.71 | 29.54 | -41.25 | - | - | 0-360 |
| 4 | 19.9685 | 18.94 | Pk | 10.1 | .7 | -40 | -10.26 | 29.54 | -39.8 | - | - | 0-360 |
| 9 | 20.25879 | 15.98 | Pk | 10.1 | .7 | -40 | -13.22 | 29.54 | -42.76 | - | - | 0-360 |

Pk - Peak detector

11.4. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

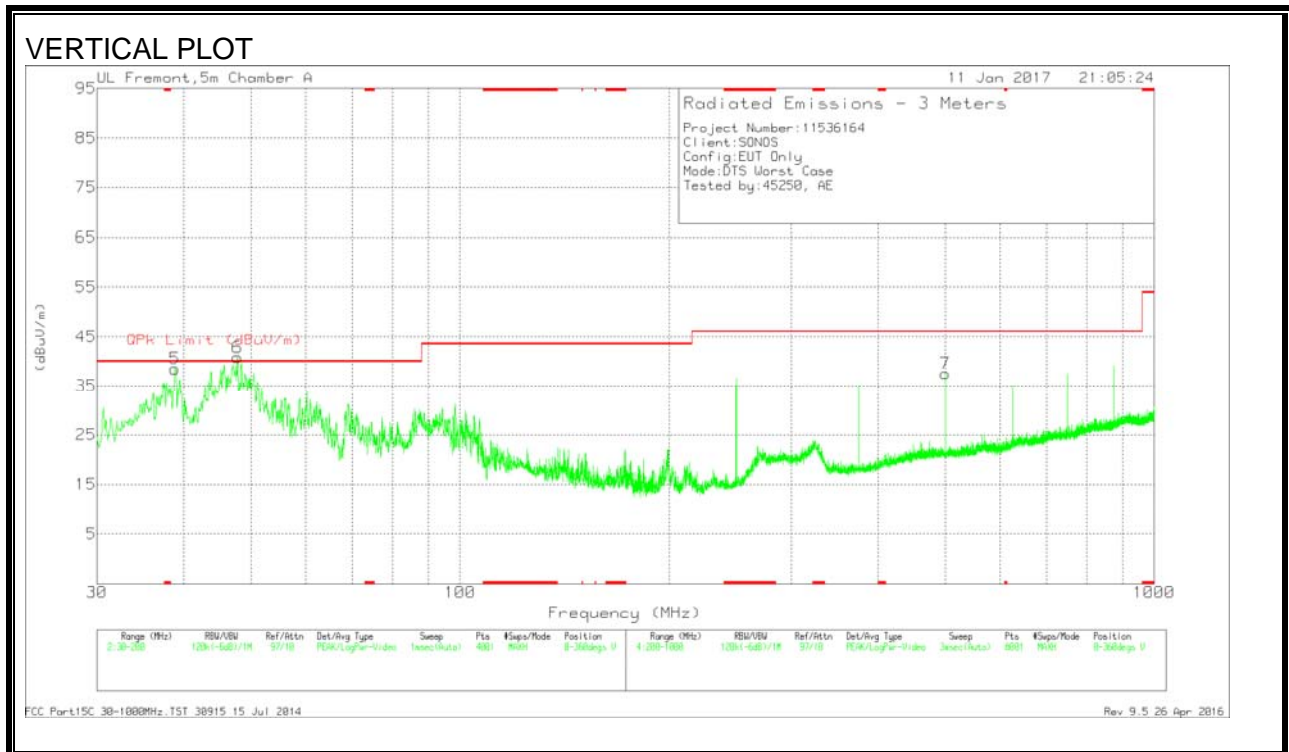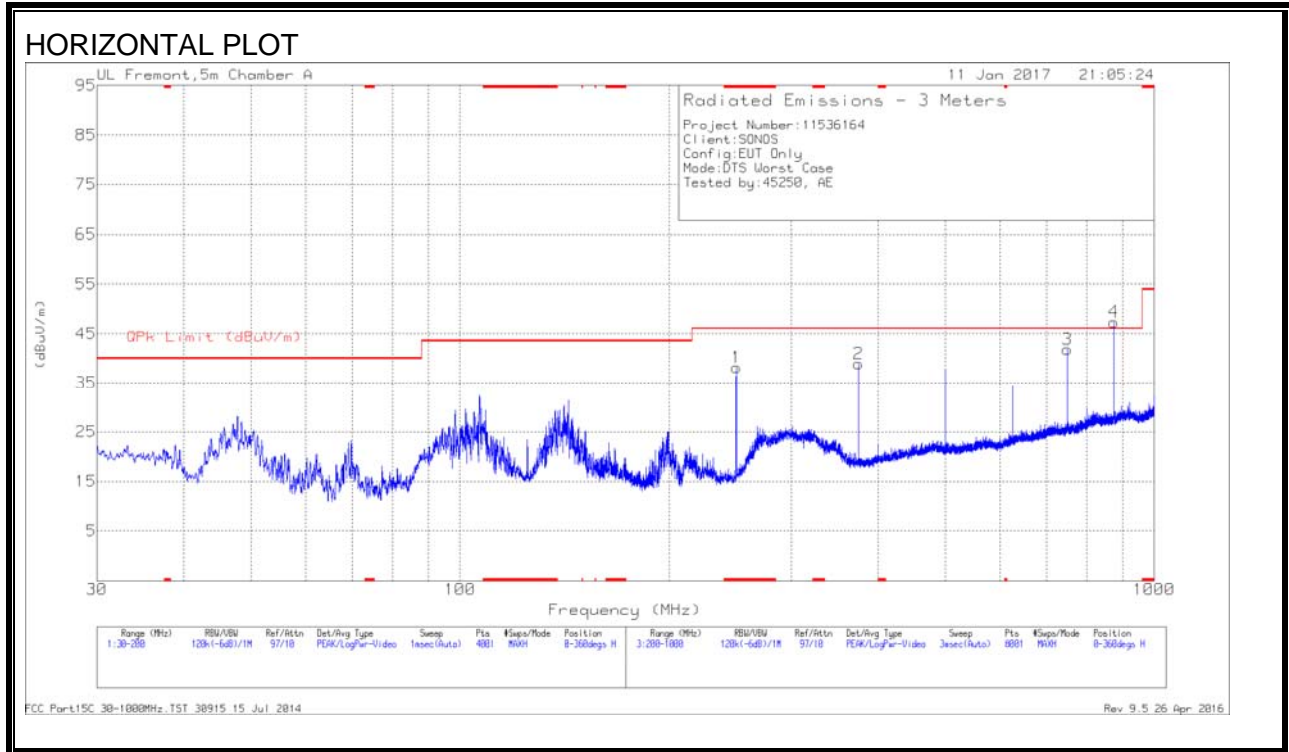

DATA

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | AF T130 (dB/m) | Amp/Cbl (dB/m) | Corrected Reading (dBuV/m) | QPk Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|----------------|----------------------------|--------------------|-------------|----------------|-------------|----------|
| 1 | * 250 | 52.31 | Pk | 15.5 | -29.6 | 38.21 | 46.02 | -7.81 | 0-360 | 100 | H |
| 5 | 38.8825 | 50.79 | Pk | 18.8 | -31.1 | 38.49 | 40 | -1.51 | 0-360 | 100 | V |
| 6 | 47.8075 | 59.42 | Pk | 12.5 | -31.1 | 40.82 | 40 | .82 | 0-360 | 100 | V |
| 2 | 375 | 49.05 | Pk | 19 | -29.1 | 38.95 | 46.02 | -7.07 | 0-360 | 100 | H |
| 7 | 500 | 44.51 | Pk | 21.7 | -28.7 | 37.51 | 46.02 | -8.51 | 0-360 | 200 | V |
| 3 | 750 | 45.31 | Pk | 24.8 | -28.3 | 41.81 | 46.02 | -4.21 | 0-360 | 100 | H |
| 4 | 875 | 48.97 | Pk | 25.9 | -27.5 | 47.37 | 46.02 | 1.35 | 0-360 | 100 | H |

* - indicates frequency in CFR47 Pt 15 / RSS-Gen 8.10 Restricted Band
 Pk - Peak detector



Radiated Emissions

| Frequency (MHz) | Meter Reading (dBuV) | Det | AF T130 (dB/m) | Amp/Cbl (dB/m) | Corrected Reading (dBuV/m) | QPk Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|-----|----------------|----------------|----------------------------|--------------------|-------------|----------------|-------------|----------|
| 38.9511 | 49.58 | Qp | 18.7 | -31.1 | 37.18 | 40 | -2.82 | 342 | 105 | V |
| 47.8022 | 57.23 | Qp | 12.5 | -31.1 | 38.63 | 40 | -1.37 | 6 | 104 | V |
| 749.9986 | 45.03 | Qp | 24.8 | -28.3 | 41.53 | 46.02 | -4.49 | 160 | 101 | H |
| 875.0024 | 44.58 | Qp | 25.9 | -27.5 | 42.98 | 46.02 | -3.04 | 165 | 101 | H |

* - indicates frequency in CFR47 Pt 15 / RSS-Gen 8.10 Restricted Band
 Qp - Quasi-Peak detector

11.5. WORST-CASE 18 to 26 GHz

SPURIOUS EMISSIONS 18 TO 26 GHz (WORST-CASE CONFIGURATION, HORIZONTAL & VERTICAL)

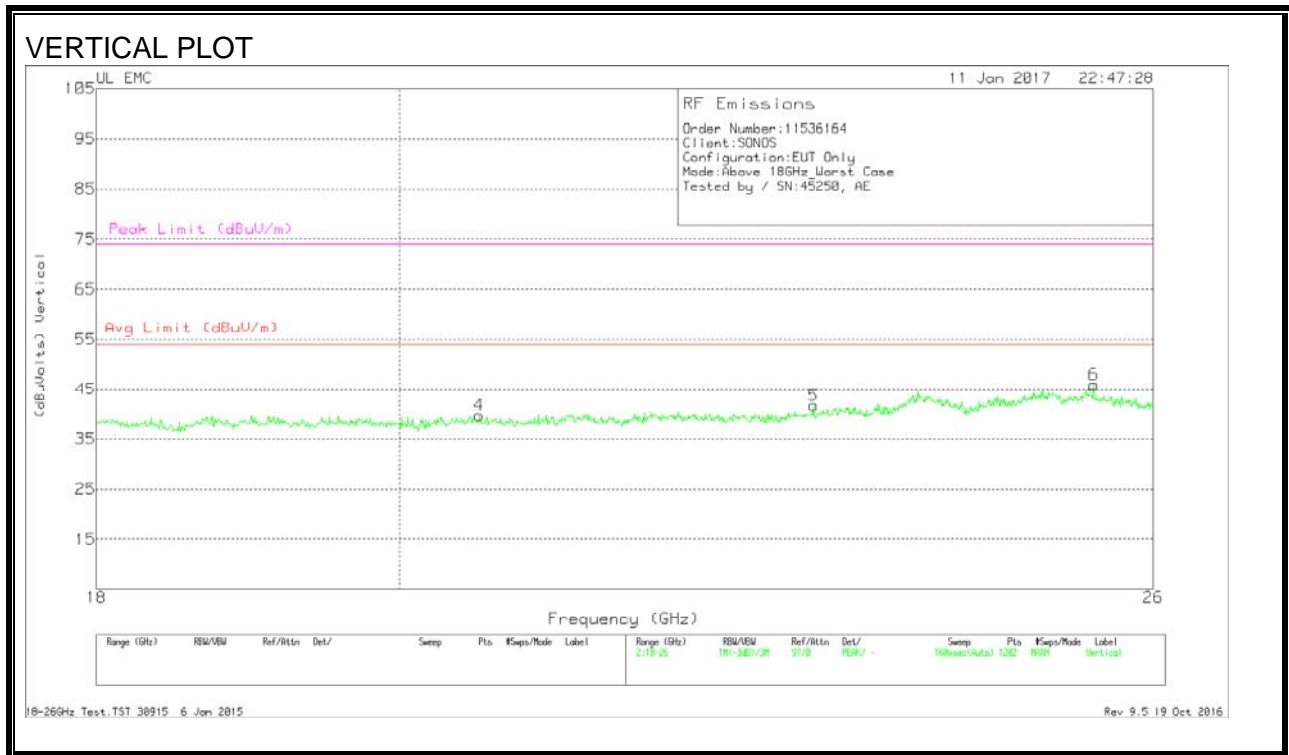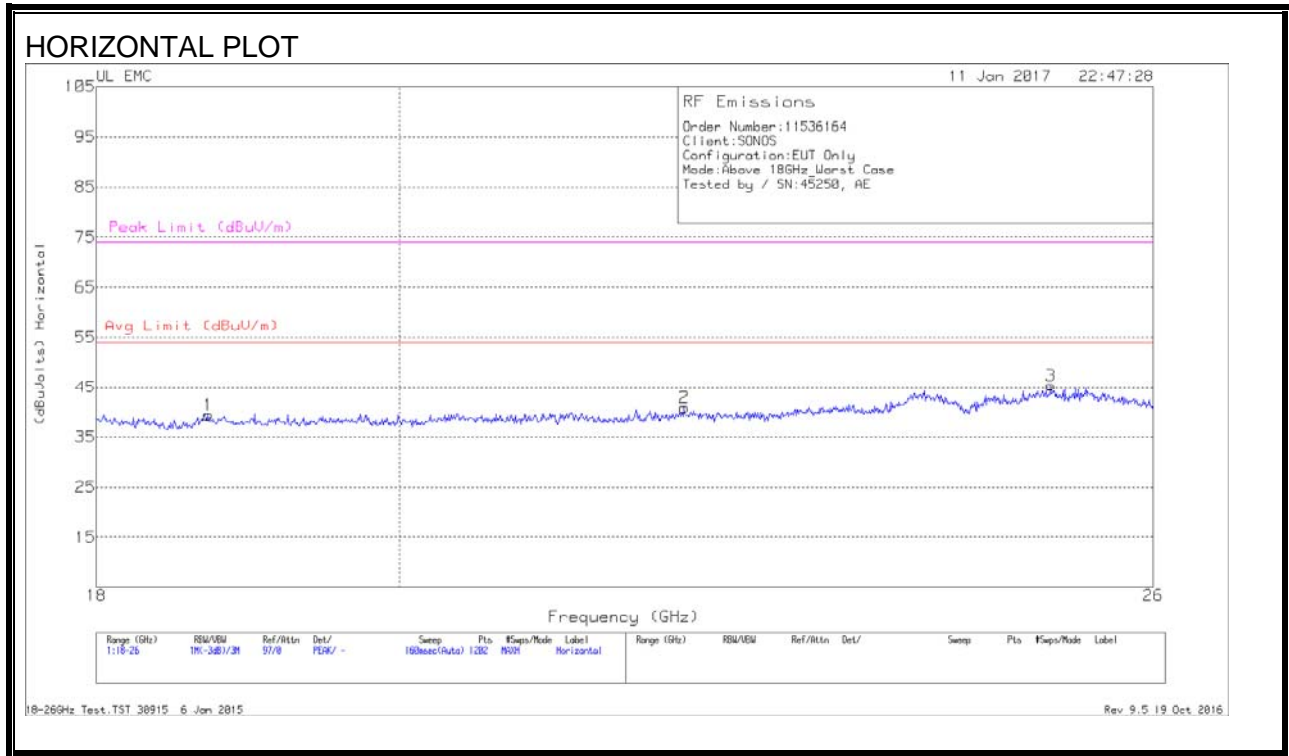

DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T449 (dB/m) | Amp/Cbl (dB) | Dist Corr (dB) | Corrected Reading (dBuVolts) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) |
|--------|-----------------|----------------------|-----|----------------|--------------|----------------|------------------------------|--------------------|-------------|---------------------|----------------|
| 1 | 18.713 | 40.93 | Pk | 32.4 | -24.5 | -9.5 | 39.33 | 54 | -14.67 | 74 | -34.67 |
| 2 | 22.083 | 42.13 | Pk | 33.5 | -25.3 | -9.5 | 40.83 | 54 | -13.17 | 74 | -33.17 |
| 3 | 25.087 | 45.03 | Pk | 34.3 | -24.5 | -9.5 | 45.33 | 54 | -8.67 | 74 | -28.67 |
| 4 | 20.565 | 41.67 | Pk | 32.9 | -25.4 | -9.5 | 39.67 | 54 | -14.33 | 74 | -34.33 |
| 5 | 23.102 | 42.77 | Pk | 33.5 | -25.1 | -9.5 | 41.67 | 54 | -12.33 | 74 | -32.33 |
| 6 | 25.467 | 45.7 | Pk | 34.4 | -24.6 | -9.5 | 46 | 54 | -8 | 74 | -28 |

Pk - Peak detector

12. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

| Frequency of Emission (MHz) | Conducted Limit (dB μ V) | |
|-----------------------------|------------------------------|------------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56 * | 56 to 46 * |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

*Decreases with the logarithm of the frequency.

TEST PROCEDURE


The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

12.1. EUT IS POWERED BY LINE CORD CONNECTED TO AC MAINS

LINE 1 RESULTS

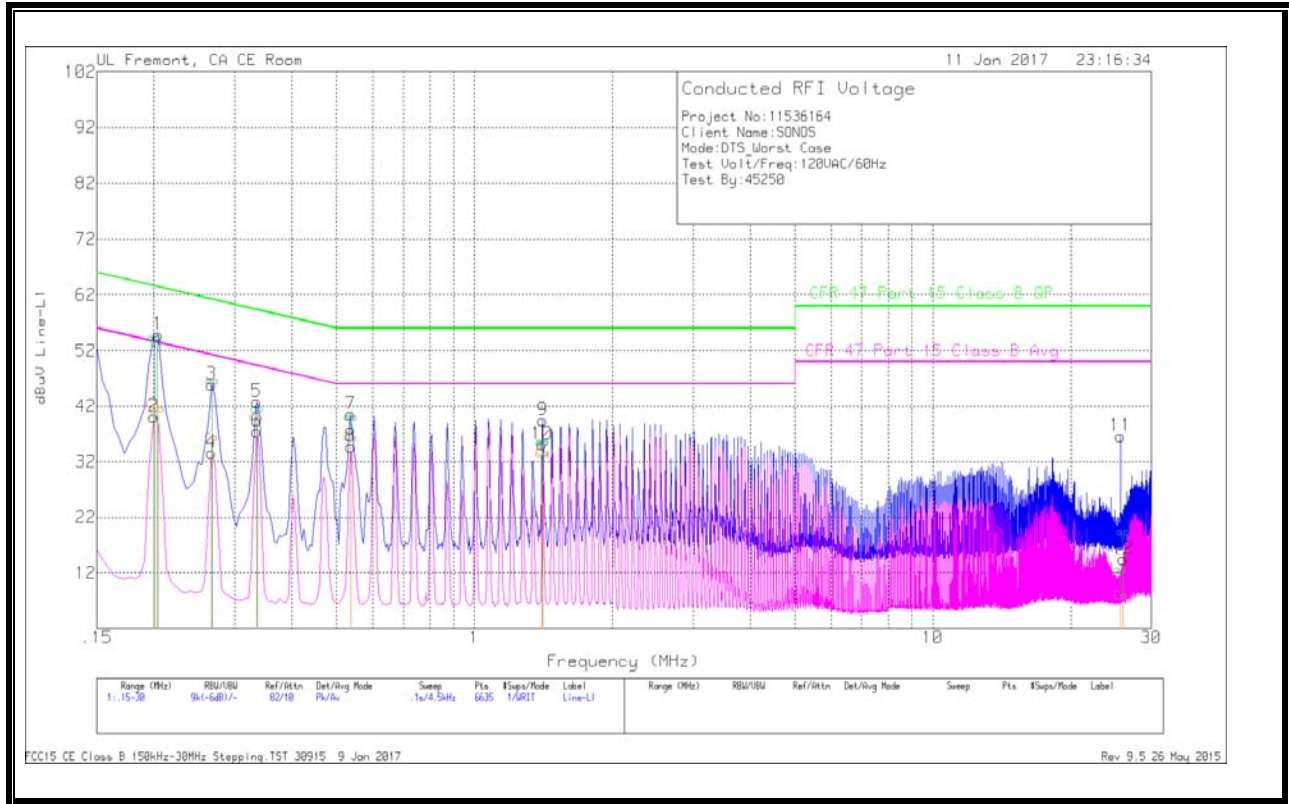

WORST EMISSIONS

Range 1: Line-L1 .15 - 30MHz

| Frequency (MHz) | Meter Reading (dBuV) | Det | LISN L1 | LC Cables 1&3 | Limiter (dB) | Corrected Reading dBuV | CFR 47 Part 15 Class B QP | QP Margin (dB) | CFR 47 Part 15 Class B Avg | Margin (dB) |
|-----------------|----------------------|-----|---------|---------------|--------------|------------------------|---------------------------|----------------|----------------------------|-------------|
| .20288 | 30.29 | Ca | 0 | 0 | 10.1 | 40.39 | - | - | 53.49 | -13.1 |
| .20063 | 31.01 | Ca | 0 | 0 | 10.1 | 41.11 | - | - | 53.58 | -12.47 |
| .26813 | 25.12 | Ca | 0 | 0 | 10.1 | 35.22 | - | - | 51.18 | -15.96 |
| .33563 | 28.64 | Ca | 0 | 0 | 10.1 | 38.74 | - | - | 49.31 | -10.57 |
| .53813 | 25.02 | Ca | 0 | 0 | 10.1 | 35.12 | - | - | 46 | -10.88 |
| 1.40978 | 22.27 | Ca | 0 | .1 | 10.1 | 32.47 | - | - | 46 | -13.53 |
| 1.40618 | 22.06 | Ca | 0 | 0 | 10.1 | 32.16 | - | - | 46 | -13.84 |
| 25.7143 | -4.09 | Ca | .1 | .3 | 10.5 | 6.81 | - | - | 50 | -43.19 |
| 26.0171 | 3.69 | Ca | .1 | .3 | 10.5 | 14.59 | - | - | 50 | -35.41 |


Ca - CISPR average detection

Range 1: Line-L1 .15 - 30MHz

| Frequency (MHz) | Meter Reading (dBuV) | Det | LISN L1 | LC Cables 1&3 | Limiter (dB) | Corrected Reading dBuV | CFR 47 Part 15 Class B QP | QP Margin (dB) | CFR 47 Part 15 Class B Avg | Margin (dB) |
|-----------------|----------------------|-----|---------|---------------|--------------|------------------------|---------------------------|----------------|----------------------------|-------------|
| .20288 | 42.32 | Qp | 0 | 0 | 10.1 | 52.42 | 63.49 | -11.07 | - | - |
| .20063 | 43.08 | Qp | 0 | 0 | 10.1 | 53.18 | 63.58 | -10.4 | - | - |
| .26813 | 35.35 | Qp | 0 | 0 | 10.1 | 45.45 | 61.18 | -15.73 | - | - |
| .33563 | 30.26 | Qp | 0 | 0 | 10.1 | 40.36 | 59.31 | -18.95 | - | - |
| .53813 | 28.73 | Qp | 0 | 0 | 10.1 | 38.83 | 56 | -17.17 | - | - |
| 1.40978 | 24.34 | Qp | 0 | .1 | 10.1 | 34.54 | 56 | -21.46 | - | - |
| 1.40618 | 24.13 | Qp | 0 | 0 | 10.1 | 34.23 | 56 | -21.77 | - | - |
| 25.7143 | .62 | Qp | .1 | .3 | 10.5 | 11.52 | 60 | -48.48 | - | - |
| 26.0171 | 7.37 | Qp | .1 | .3 | 10.5 | 18.27 | 60 | -41.73 | - | - |

Qp - Quasi-Peak detector

LINE 2 RESULTS

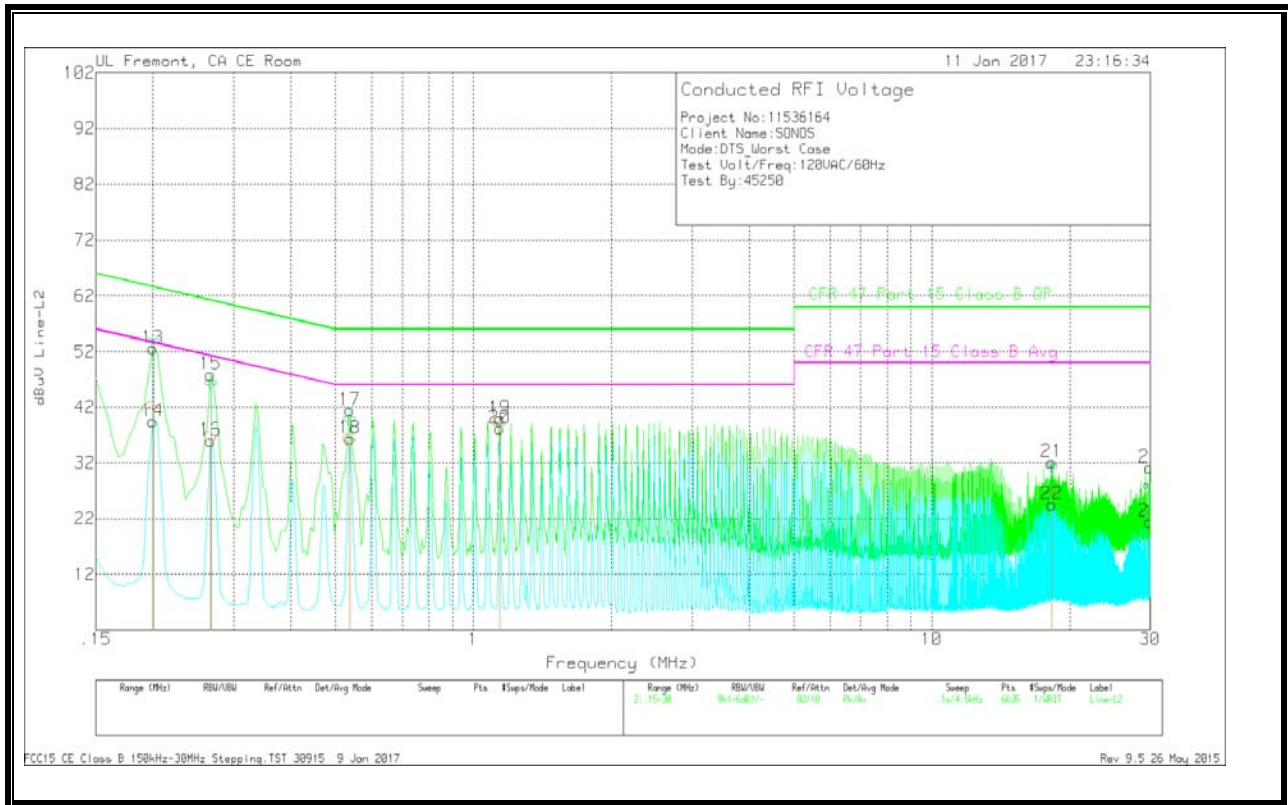

WORST EMISSIONS

Range 2: Line-L2 .15 - 30MHz

| Frequency (MHz) | Meter Reading (dBuV) | Det | LISN L2 | LC Cables 2&3 | Limiter (dB) | Corrected Reading dBuV | CFR 47 Part 15 Class B QP | QP Margin (dB) | CFR 47 Part 15 Class B Avg | Margin (dB) |
|-----------------|----------------------|-----|---------|---------------|--------------|------------------------|---------------------------|----------------|----------------------------|-------------|
| .20063 | 30.94 | Ca | 0 | 0 | 10.1 | 41.04 | - | - | 53.58 | -12.54 |
| .26813 | 25.57 | Ca | 0 | 0 | 10.1 | 35.67 | - | - | 51.18 | -15.51 |
| .53768 | 24.99 | Ca | 0 | 0 | 10.1 | 35.09 | - | - | 46 | -10.91 |
| 1.13978 | 28.01 | Ca | 0 | 0 | 10.1 | 38.11 | - | - | 46 | -7.89 |
| 18.3041 | 15.48 | Ca | 0 | .2 | 10.3 | 25.98 | - | - | 50 | -24.02 |
| 29.9051 | 11.04 | Ca | .1 | .3 | 10.4 | 21.84 | - | - | 50 | -28.16 |
| 29.9074 | 11.05 | Ca | .1 | .3 | 10.4 | 21.85 | - | - | 50 | -28.15 |

Ca - CISPR average detection

Range 2: Line-L2 .15 - 30MHz

| Frequency (MHz) | Meter Reading (dBuV) | Det | LISN L2 | LC Cables 2&3 | Limiter (dB) | Corrected Reading dBuV | CFR 47 Part 15 Class B QP | QP Margin (dB) | CFR 47 Part 15 Class B Avg | Margin (dB) |
|-----------------|----------------------|-----|---------|---------------|--------------|------------------------|---------------------------|----------------|----------------------------|-------------|
| .20063 | 42.93 | Qp | 0 | 0 | 10.1 | 53.03 | 63.58 | -10.55 | - | - |
| .26813 | 35.33 | Qp | 0 | 0 | 10.1 | 45.43 | 61.18 | -15.75 | - | - |
| .53768 | 28.77 | Qp | 0 | 0 | 10.1 | 38.87 | 56 | -17.13 | - | - |
| 1.13978 | 28.06 | Qp | 0 | 0 | 10.1 | 38.16 | 56 | -17.84 | - | - |
| 18.3041 | 19.95 | Qp | 0 | .2 | 10.3 | 30.45 | 60 | -29.55 | - | - |
| 29.9051 | 16.08 | Qp | .1 | .3 | 10.4 | 26.88 | 60 | -33.12 | - | - |
| 29.9074 | 15.99 | Qp | .1 | .3 | 10.4 | 26.79 | 60 | -33.21 | - | - |

Qp - Quasi-Peak detector

14. ART Power setting table based on Radiated Bandedge measurements:

| Channel | Frequency | | | |
|---------|-----------|-----|------|------|
| | | 11b | 11g | 11n |
| 1 | 2412 | 19 | 14 | 14 |
| 2 | 2417 | 20 | 15 | 15 |
| 3 | 2422 | 20 | 17 | 15 |
| 4 | 2427 | 20 | 18 | 17 |
| 5 | 2432 | 20 | 18 | 19 |
| 6 | 2437 | 20 | 19 | 19 |
| 7 | 2442 | 20 | 18 | 19 |
| 8 | 2447 | 20 | 17 | 17 |
| 9 | 2452 | 20 | 16.5 | 16.5 |
| 10 | 2457 | 20 | 15 | 15 |
| 11 | 2462 | 19 | 15 | 14 |

END OF REPORT