



# **CERTIFICATION TEST REPORT**

**Report Number. :** 11886412-E3V5

**Applicant :** SONOS, INC.  
614 CHAPALA STREET  
SANTA BARBARA, CA, 93101, U.S.A

**Model :** S14

**FCC ID :** SBVRM014

**IC :** 5373A-RM014

**EUT Description :** HOME THEATER SPEAKER

**Test Standard(s) :** FCC 47 CFR PART 15 SUBPART E (EXCEPT DFS)  
ISED RSS - 247 ISSUE 2 (EXCEPT DFS)  
ISED RSS-GEN ISSUE 4

**Date Of Issue:**  
March 16, 2018

**Prepared by:**  
UL Verification Services Inc.  
47173 Benicia Street  
Fremont, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888



## REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	12/5/2017	Initial Issue	D. Coronia
V2	1/9/2018	Updated Section 2, 5.9, 5.3, 6.5.1-6.5.4 and Corrected FCC ID	D. Coronia
V3	02/22/2018	Updated section 5.5, 5.6, 6.5, 6.5.2, 7.2, 8.1, 10. Added section 7.6	C. Susa
V4	03/12/2018	Updated EUT description from Wireless Smart Speaker to Home Theater Speaker	C. Susa
V5	03/14/2018	Updated Product description, Section 5.1	C. Susa

## TABLE OF CONTENTS

<b>TABLE OF CONTENTS .....</b>	<b>3</b>
<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>5</b>
<b>2. TEST METHODOLOGY .....</b>	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>6</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	<i>6</i>
4.2. <i>SAMPLE CALCULATION .....</i>	<i>6</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>7</i>
<b>5. EQUIPMENT UNDER TEST.....</b>	<b>8</b>
5.1. <i>DESCRIPTION OF EUT .....</i>	<i>8</i>
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	<i>8</i>
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	<i>8</i>
5.4. <i>SOFTWARE AND FIRMWARE.....</i>	<i>8</i>
5.5. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>9</i>
5.6. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>10</i>
5.7. <i>TEST AND MEASUREMENT EQUIPMENT.....</i>	<i>15</i>
5.8. <i>SUMMARY TABLE .....</i>	<i>16</i>
5.9. <i>MEASUREMENT METHOD.....</i>	<i>17</i>
<b>6. ANTENNA PORT TEST RESULTS .....</b>	<b>18</b>
6.1. <i>ON TIME AND DUTY CYCLE.....</i>	<i>18</i>
6.2. <i>26 dB BANDWIDTH.....</i>	<i>20</i>
6.2.1. <i>802.11n HT20 MODE IN THE 5.2 GHz BAND .....</i>	<i>21</i>
6.2.2. <i>802.11n HT20 MODE IN THE 5.3 GHz BAND .....</i>	<i>24</i>
6.2.3. <i>802.11n HT20 MODE IN THE 5.6 GHz BAND .....</i>	<i>27</i>
6.2.4. <i>802.11n HT20 MODE IN THE 5.8 GHz BAND .....</i>	<i>30</i>
6.3. <i>99% BANDWIDTH.....</i>	<i>33</i>
6.3.1. <i>802.11n HT20 MODE IN THE 5.2 GHz BAND .....</i>	<i>34</i>
6.3.2. <i>802.11n HT20 MODE IN THE 5.3 GHz BAND .....</i>	<i>37</i>
6.3.3. <i>802.11n HT20 MODE IN THE 5.6 GHz BAND .....</i>	<i>40</i>
6.3.4. <i>802.11n HT20 MODE IN THE 5.8 GHz BAND .....</i>	<i>43</i>
6.4. <i>6 dB BANDWIDTH.....</i>	<i>46</i>
6.4.1. <i>802.11n HT20 MODE IN THE 5.8 GHz BAND .....</i>	<i>47</i>
6.5. <i>OUTPUT POWER AND PSD.....</i>	<i>50</i>
6.5.1. <i>802.11n HT20 MODE IN THE 5.2 GHz BAND .....</i>	<i>53</i>
6.5.2. <i>802.11n HT20 MODE IN THE 5.3 GHz BAND .....</i>	<i>57</i>
6.5.3. <i>802.11n HT20 MODE IN THE 5.6 GHz BAND .....</i>	<i>61</i>
6.5.4. <i>802.11n HT20 MODE IN THE 5.8 GHz BAND .....</i>	<i>65</i>

**7. RADIATED TEST RESULTS.....69**

- 7.1. *TRANSMITTER ABOVE 1 GHz.....70*
  - 7.1.1. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.2 GHz BAND.....70
  - 7.1.2. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.3 GHz BAND.....78
  - 7.1.3. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.6 GHz BAND.....86
  - 7.1.4. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.8 GHz BAND.....96
- 7.2. *Worst Case Below 1 GHz ..... 106*
- 7.3. *Worst Case 18-26 GHz..... 108*
- 7.4. *Worst Case 26-40 GHz..... 110*
- 7.5. *Worst Case 9 kHz - 30 MHz..... 112*
- 7.6. *WORST-CASE SIMULTANEOUS TRANSMISSION..... 114*

**8. ART POWER SETTINGS TABLE FOR CONDUCTED AND RADIATED MEASUREMENTS .....116**

- 8.1. *CONDUCTED OUTPUT POWER SETTING FOR 4x4:..... 116*
- 8.2. *RADIATED BANDEDGE POWER SETTING FOR 4x4:..... 117*

**9. AC POWER LINE CONDUCTED EMISSIONS.....118**

**10. SETUP PHOTOS.....121**

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SONOS, INC.  
**PRODUCT DESCRIPTION:** HOME THEATER SPEAKER  
**MODEL:** S14  
**SERIAL NUMBER:** 179-94-9F-3E-C0-07-0E-3 CA (Radiated Sample)  
1708 94 -9F-3E-D0-05-FE-2 (Radiated Sample)  
1709-94-9F-3E-D0-07-09-E (Conducted Sample)  
**DATE TESTED:** October 11- 17, 2017; February 14<sup>th</sup> - 16<sup>th</sup>, 2018

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E (EXCEPT DFS)	Complies
ISED RSS-247 ISSUE 2 (EXCEPT DFS)	Complies
ISED RSS-GEN Issue 4	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Verification Services Inc. By:

Prepared By:



DAN CORONIA  
OPERATIONS LEADER  
UL Verification Services Inc.

ERIC YU  
TEST ENGINEER  
UL Verification Services Inc.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, KDB 789033 D02 v02r01, KDB 662911 D01 Multiple Transmitter Output v02r01, KDB 662911 D02 MIMO with Cross Polarized Antenna v01, ANSI C63.10-2013, RSS-GEN Issue 4, and RSS-247 Issue 2.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input checked="" type="checkbox"/> Chamber A(IC: 2324B-1)	<input type="checkbox"/> Chamber D(IC: 2324B-4)
<input checked="" type="checkbox"/> Chamber B(IC: 2324B-2)	<input type="checkbox"/> Chamber E(IC: 2324B-5)
<input type="checkbox"/> Chamber C(IC: 2324B-3)	<input type="checkbox"/> Chamber F(IC: 2324B-6)
	<input type="checkbox"/> Chamber G(IC: 2324B-7)
	<input type="checkbox"/> Chamber H(IC: 2324B-8)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through H are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-8, respectively.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.84 dB
Radiated Disturbance, 9KHz to 30 MHz	2.14 dB
Radiated Disturbance, 30 to 1000 MHz	4.98 dB
Radiated Disturbance, 1000 to 6000 MHz	3.86 dB
Radiated Disturbance, 6000 to 18000 MHz	4.23 dB
Radiated Disturbance, 18000 to 26000 MHz	5.30 dB
Radiated Disturbance, 26000 to 40000 MHz	5.23 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is 802.11 a/b/g/n (HT20) master device. The model S14 is a high-performance all-in-one home theater smart speaker and part of Sonos' home sound system.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5180 - 5240	802.11n HT20 MIMO	20.07	101.62
5260 - 5320	802.11n HT20 MIMO	19.92	98.17
5500 - 5700	802.11n HT20 MIMO	19.74	94.19
5745 - 5825	802.11n HT20 MIMO	20.34	108.14

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes cross-polarized antennas, with a maximum gain as below:

Frequency Range MHz	5GHz Antenna Identification / Max Antenna Gain dBi			
	PWS-Stamped (Vertical Polarization)	PWR-Dipole (Horizontal Polarization)	HYSK-IFA (Vertical Polarization)	HTSK-Slot (Horizontal Polarization)
U-NII-1 (5180-5240)	Chain 3 / <b>1.67</b>	Chain 2 / <b>2.38</b>	Chain 1 / <b>4.33</b>	Chain 0 / <b>4.20</b>
U-NII-2A (5260-5320)	Chain 3 / <b>2.29</b>	Chain 2 / <b>2.72</b>	Chain 1 / <b>3.98</b>	Chain 0 / <b>4.37</b>
U-NII-2C (5500-5700)	Chain 3 / <b>2.92</b>	Chain 2 / <b>3.49</b>	Chain 1 / <b>3.40</b>	Chain 0 / <b>3.57</b>
U-NII-3 (5745-5825)	Chain 3 / <b>1.97</b>	Chain 2 / <b>4.05</b>	Chain 1 / <b>2.49</b>	Chain 0 / <b>1.92</b>

NOTE: All final tests were performed using the EUT highest antenna gain with same polarity as the test measurement setup.

### 5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was Atheros Radio Test 2 (ART2-GUI).



## 5.5. WORST-CASE CONFIGURATION AND MODE

All measurements were performed with the AC plugged into a power source. The worst-case configuration for below 1GHz radiated emissions were performed with the EUT including the HDMI port exercised and the channel with the highest output power. The worst-case configuration for radiated emissions above 1GHz, and power line conducted emissions were performed with the EUT only and set to transmit at the channel with highest output power.

Radiated bandedge, harmonics, and spurious emissions from 1GHz to 18GHz were performed. The EUT was set to transmit at the Low/Middle/High channels with designed (target) output powers.

The EUT can only be setup in desktop orientation; therefore, all radiated testing was performed with the EUT in desktop orientation.

For simultaneous transmission in the 2.4GHz and 5GHz bands, tests were conducted for various configurations having the highest power. No noticeable new emission was found.

Data rates as provided by the client were:

802.11n HT20mode: MCS3 for Conducted Testing  
802.11n HT20mode: MCS11 for Radiated Testing

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List			
Description	Manufacturer	Model	Serial Number
Laptop	Lenovo	X201	R9-BC7TG
AC/DC Adapter	Lenovo	ADLX90NCT2A	11S42T4418Z1ZF3B048J2Z
Television	Sony	XBR-43X830C	5082247


### I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC Power	1	AC	Unshielded	1.2	AC Mains to EUT
2	Ethernet	1	RJ45	Unshielded	1.5	Laptop to EUT
3	HDMI	1	HDMI	shielded	10.2	


### TEST SETUP

The EUT is a stand-alone unit, and the radio is exercised by Atheros Radio Test 2 (ART2-GUI) software, via Ethernet cable.


**SETUP DIAGRAM FOR RADIATED BELOW 1GHZ TESTS**

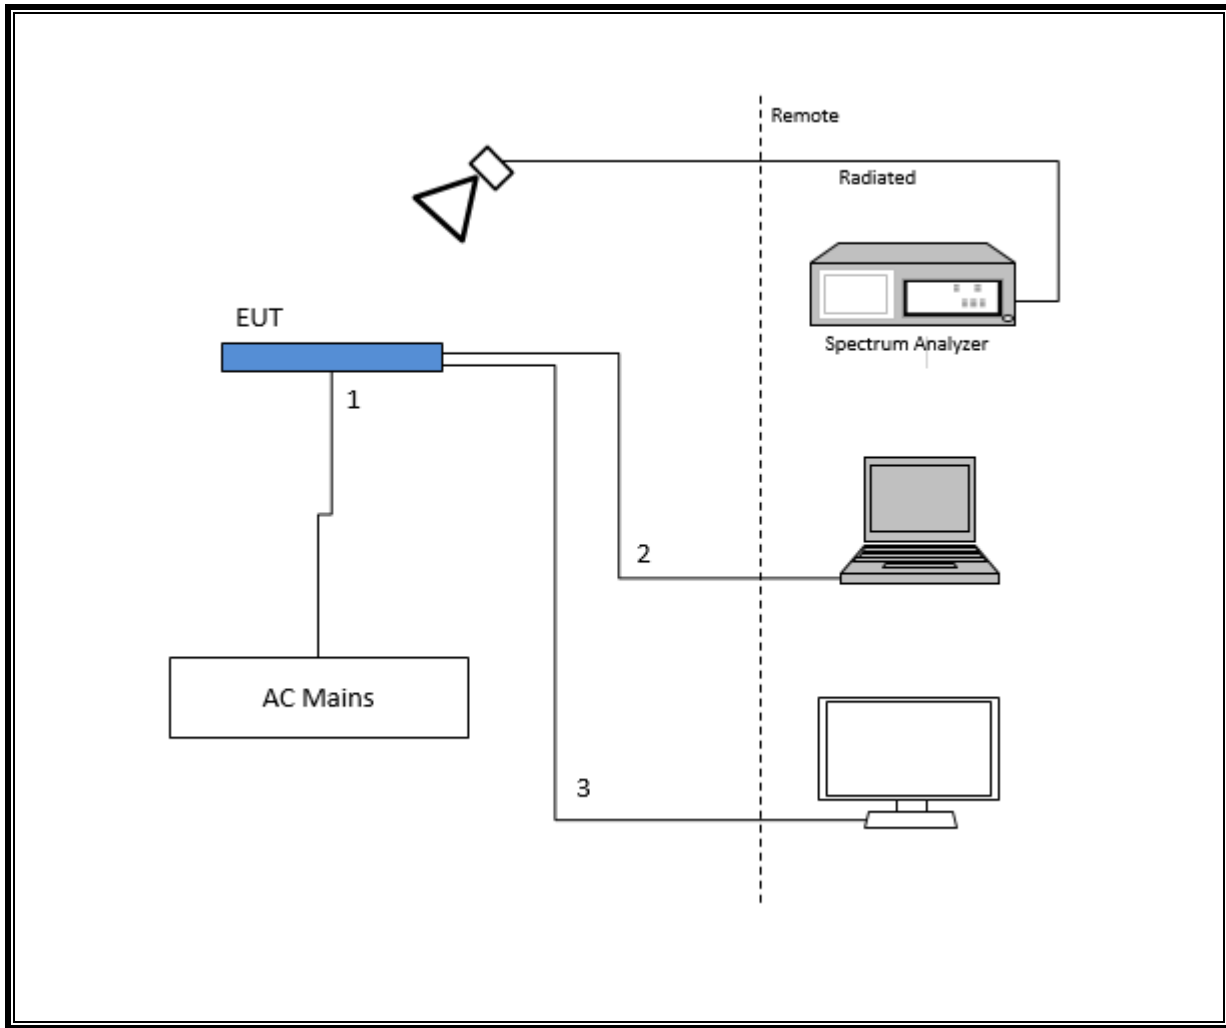


**SETUP DIAGRAM FOR RADIATED ABOVE 1GHZ TESTS**

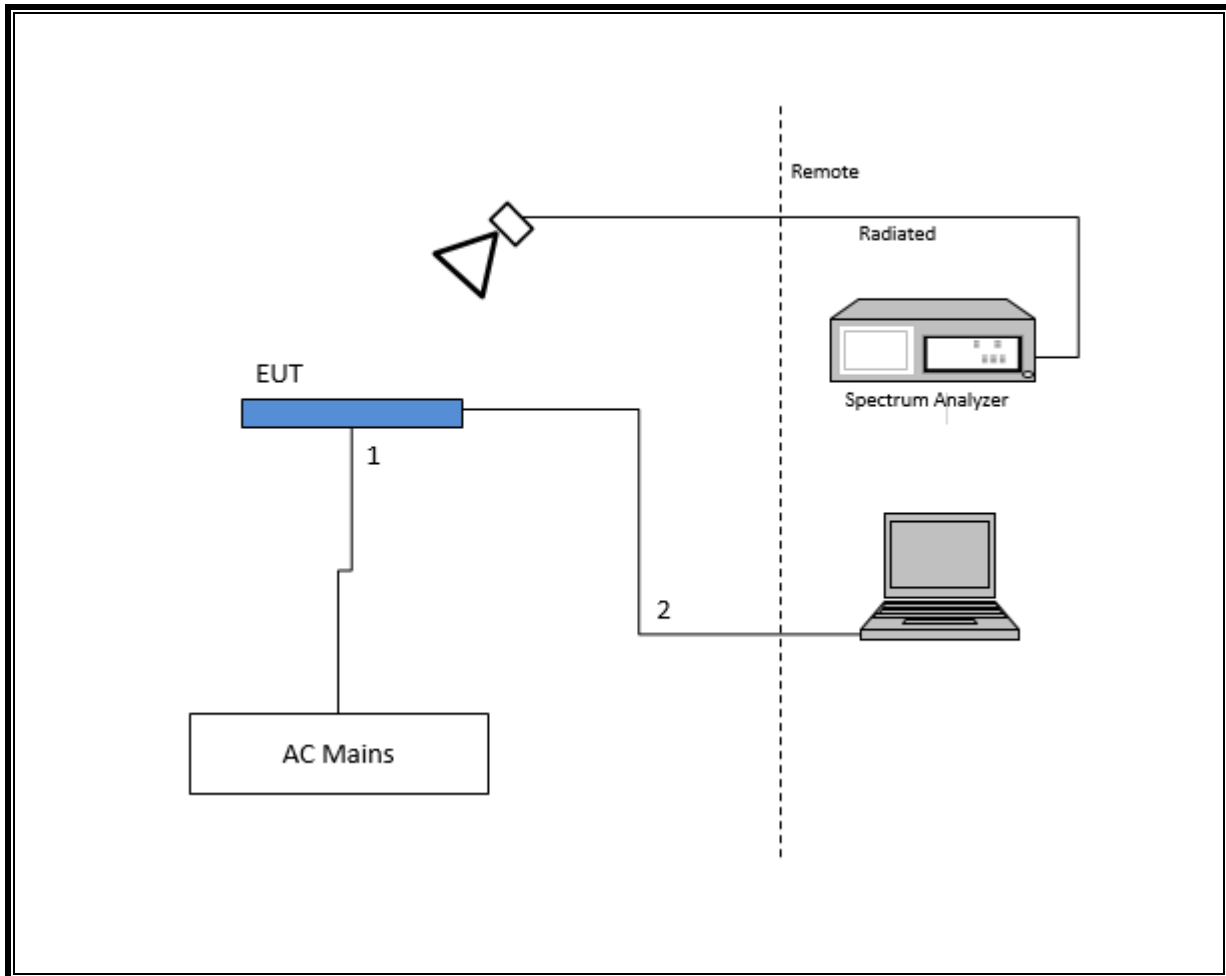

**SETUP DIAGRAM FOR CONDUCTED TESTS**

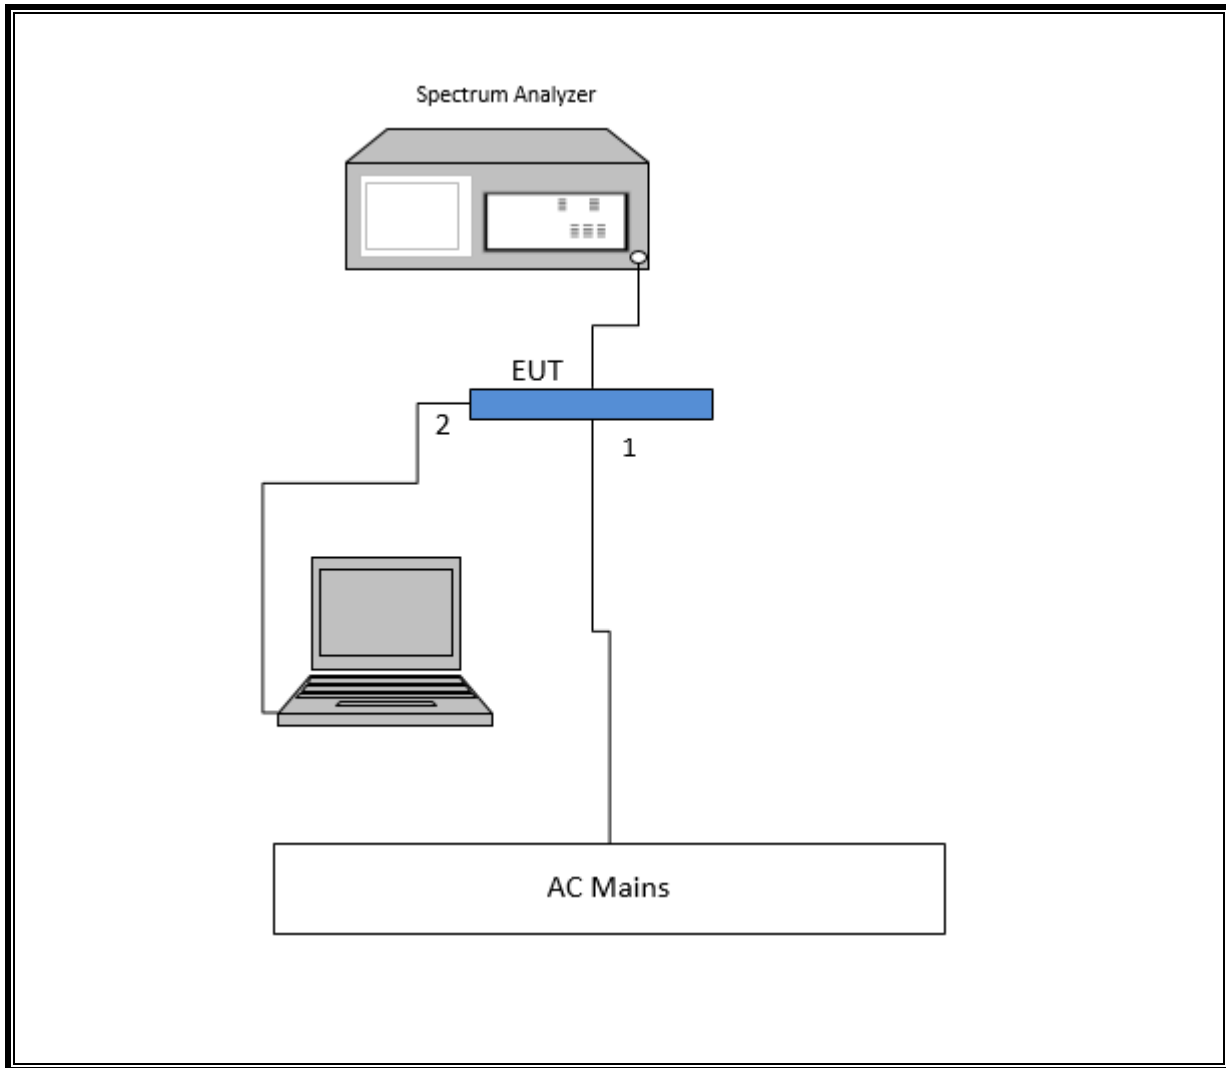

**SETUP DIAGRAM FOR AC LINE CONDUCTED TEST**

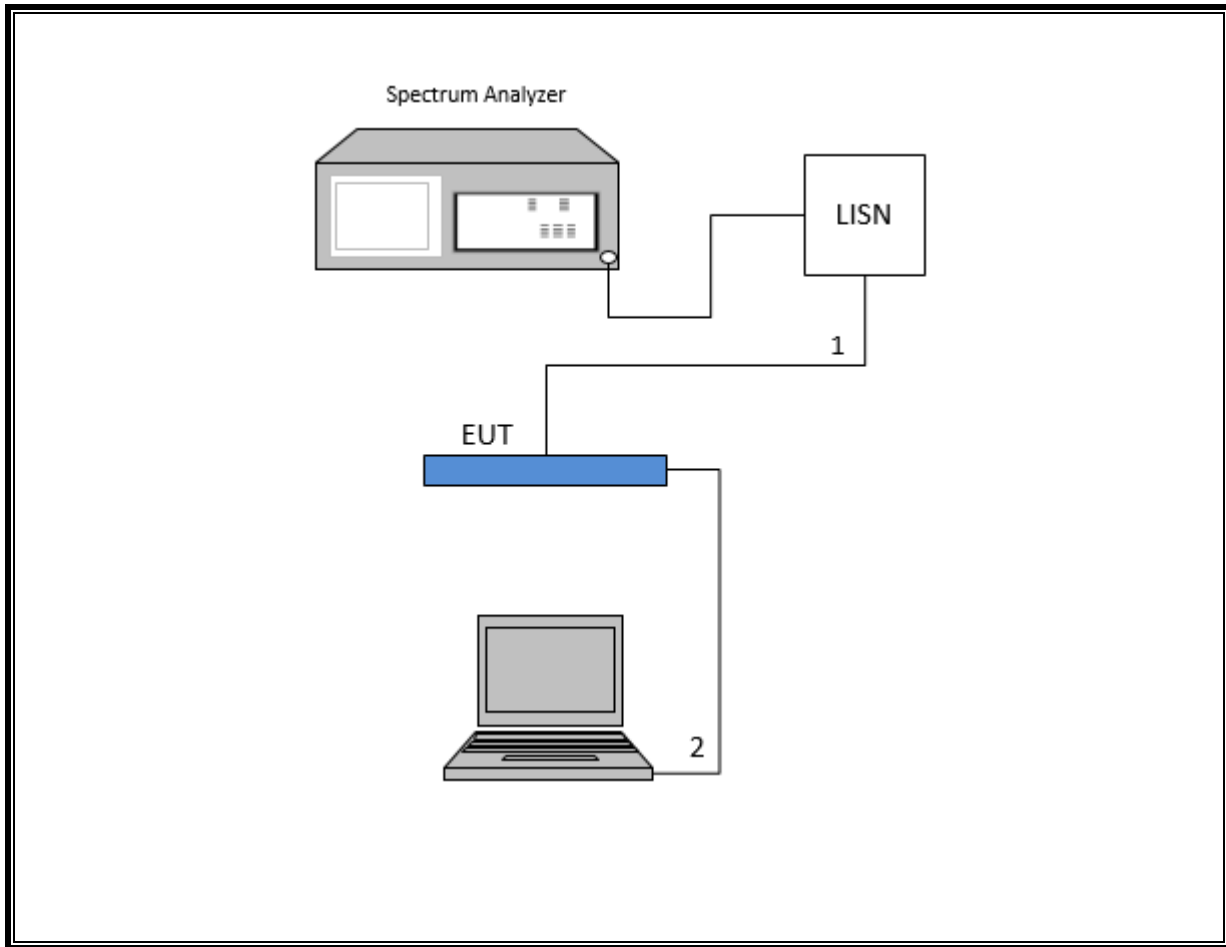

## 5.7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Broadband Hybrid, 30MHz to 2000MHz w/4dB Pad	Sunol Sciences Corp.	JB1	T130	10/16/2018
Antenna, Active Loop 9kHz-30MHz	ETS-Lindgren	6502	T1683	02/17/2018
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T863	06/09/2018
Antenna, Horn 18-26.5GHz	ARA	MWH-1826/B	T89	05/26/2018
Antenna, Horn 26.5 - 40GHz	ARA	MWH-1826/B	T90	05/26/2018
Power Meter, P-series single channel	Agilent (Keysight) Technologies	N1911A	T1264	07/08/2018
Power Sensor, P – series, 50MHz to 18GHz, Wideband	Agilent (Keysight) Technologies	N1921A	T413	06/20/2018
Amplifier, 1-18GHz	Miteq	AFS42-00101800-25-S-42	T493	12/16/2018
Amplifier, 10kHz-1GHz	Agilent (Keysight) Technologies	8447D	T15	08/26/2018
Amplifier, 1-26.5GHz	Keysight	8449B	T404	07/23/2018
Amplifier- 26.5-40GHz	Mlteq	NSP 4000 SP2	T88	04/29/2018
Filter, BRF 5150 to 5350MHz	Micro-Tronics	BRC50703	T1850	07/16/18
Filter, BRF 2400 to 2500MHz	Micro-Tronics	BRM50702-02	T1784	05/16/18
Low pass filter 5GHz	Micro-Tronics	LPS17541	T482	12/16/18
High pass filter 3GHz	Micro-Tronics	HPM17543	T485	12/16/18
High Pass Filter 6GHz	Micro-Tronics	HPS17542	T483	12/16/18
Spectrum Analyzer, PSA, 3Hz to 26.5GHz	Agilent (Keysight) Technologies	E4440A	T199	07/22/2018
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T907	01/23/2018
Spectrum Analyzer, PSA, 3Hz to 26.5GHz	Agilent (Keysight) Technologies	E9030A	T905	01/11/2018
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T1466	04/11/2018
LISN	FISCHER	FCC-LISN-50/250-25-2-01	T1310	01/17/2018
Receiver, 10kHz-7GHz	ROHDE & SCHWARZ	ESR	T1436	01/06/2018

Test Software List			
Description	Manufacturer	Model	Version
Radiated Software	UL	UL EMC	Ver 9.5, Apr 26, 2016
Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015
Antenna Port Software	UL	UL RF	Ver 5.1.1, July 15, 2016

## 5.8. SUMMARY TABLE

FCC Part Section	RSS Section	Test Description	Test Limit	Test Condition	Test Result
§15.407 (a)	RSS-247	Occupied Band width (26dB)	N/A	Conducted	Pass
§15.407	RSS-247 6.2.4	6dB Band width (5.8Ghz)	>500KHz		Pass
§15.407 (a)(1)	RSS-247 6.2	TX Cond. Power 5.15-5.25 GHz	<24dBm (FCC) / <23 dBm EIRP or <10+10Log(99% BW) EIRP (IC)		Pass
§15.407 (a)(2)	RSS-247 6.2	TX Cond. Power 5.25-5.35 & 5.47- 5.725 GHz	<24dBm or <11+10log (OBW) (FCC) / <24 dBm or <11+10Log(99% BW) (IC)		Pass
§15.407 (a)(3)	RSS-247 6.2.4	TX Cond. Power 5.725-5.850 GHz	<30dBm		Pass
§15.407 (a)(1)	RSS-247 6.2	PSD (5.15-5.25 GHz)	<11dBm/MHz (FCC) <10 dBm/MHz EIRP (IC)		Pass
§15.407 (a)(2)	RSS-247 6.2	PSD (5.3,5.5GHz)	<11dBm/MHz		Pass
§15.407 (a)(3)	RSS-247 6.2.4	PSD (5.8GHz)	<30dBm per 500kHz		
§15.207 (a) §15.407(b) (6)	RSS-GEN 8.8	AC Power Line conducted emissions	Section 10		Pass
§15.407 (b) & 15.209	RSS-GEN 8.9/7	Radiated Spurious Emission	<54dBuV/m		Radiated
§15.407 (h)(2)	RSS-247 6.3	Dynamic Frequency Selection	N/A	Radiated / Condcuted	Pass



## 5.9. MEASUREMENT METHOD

On Time and Duty Cycle: KDB 789033 D02 v02r01, Section B.

6 dB Emission BW: KDB 789033 D02 v02r01, Section C.

26 dB Emission BW: KDB 789033 D02 v02r01, Section C.

99% Occupied BW: KDB 789033 D02 v02r01, Section D.

Conducted Output Power: KDB 789033 D02 v02r01, Section E.3.b (Method PM-G), and KDB 662911 D01 v02r01

Power Spectral Density: KDB 789033 D02 v02r01, Section F, and KDB 662911 D01 v02r01

Unwanted emissions in restricted bands: KDB 789033 D02 v02r01, Sections G.3, G.4, G.5, and G.6.

Unwanted emissions in non-restricted bands: KDB 789033 D02 v02r01, Sections G.3, G.4, and G.5.

AC Power Line Conducted Emissions: ANSI C63.10-2013, Section 6.2.

## 6. ANTENNA PORT TEST RESULTS

### 6.1. ON TIME AND DUTY CYCLE

#### LIMITS

None; for reporting purposes only.



#### PROCEDURE

KDB 789033 Zero-Span Spectrum Analyzer Method.

#### RESULTS

Mode	ON Time (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
802.11n HT20 MCS3	0.347	0.374	0.927	92.7%	0.33
802.11n HT20 MCS11	0.196	0.223	0.879	87.9%	0.56

**DUTY CYCLE PLOTS**

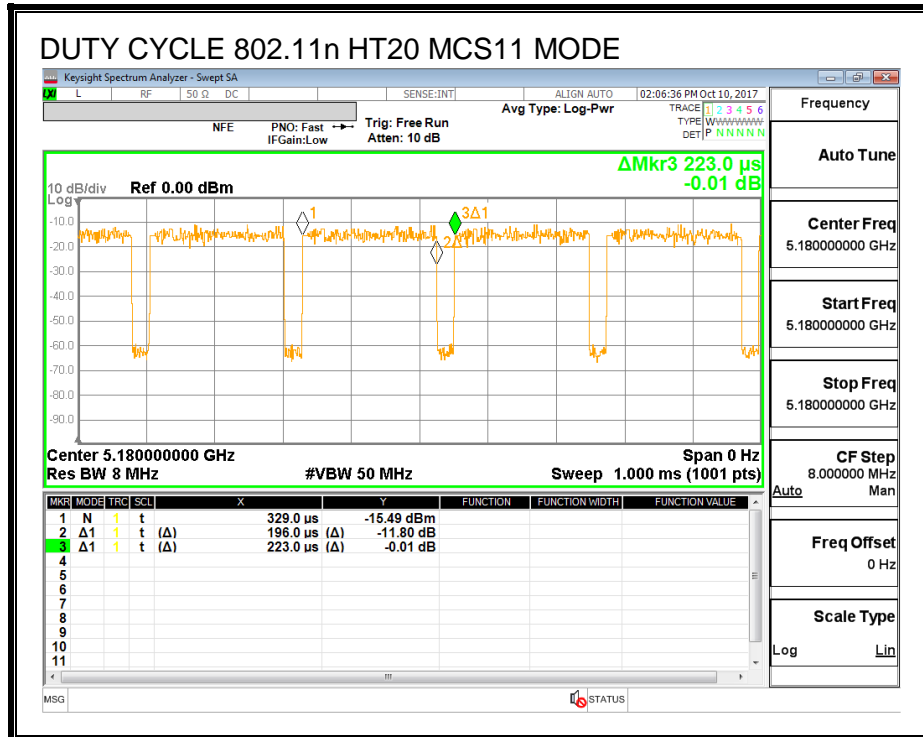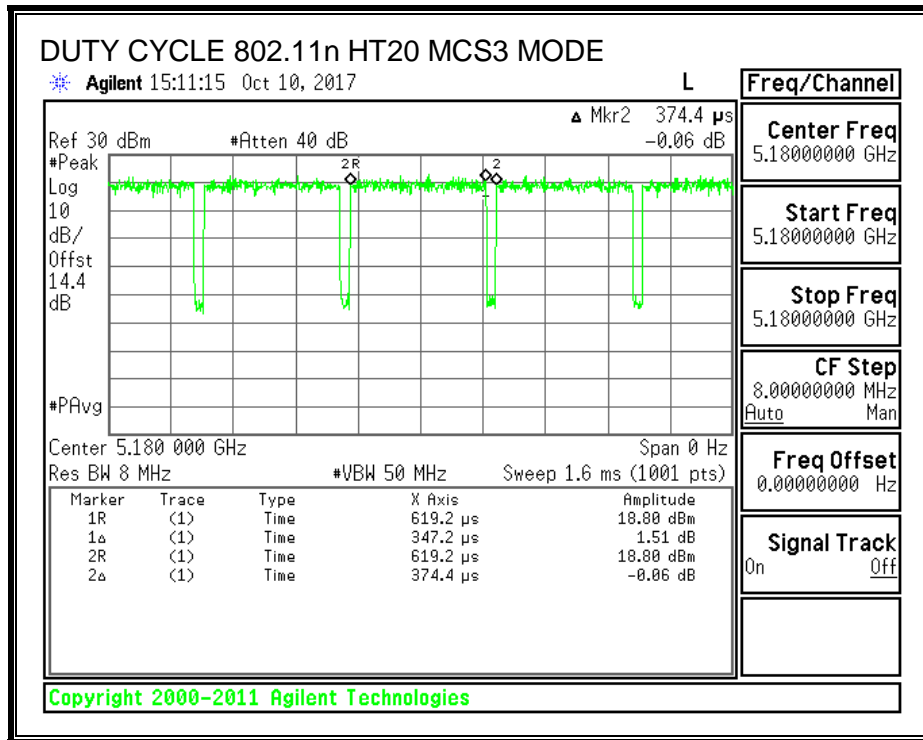

## 6.2. 26 dB BANDWIDTH

### LIMITS

None; for reporting purposes only.


### RESULTS

### 6.2.1. 802.11n HT20 MODE IN THE 5.2 GHz BAND


#### 4TX CDD MODE

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	26 dB Bandwidth Chain 2 (MHz)	26 dB Bandwidth Chain 3 (MHz)
Low	5180	20.70	20.65	20.55	20.35
Mid	5200	20.65	<b>20.75</b>	20.50	20.45
High	5240	20.60	20.65	20.75	20.45


#### LOW CHANNEL

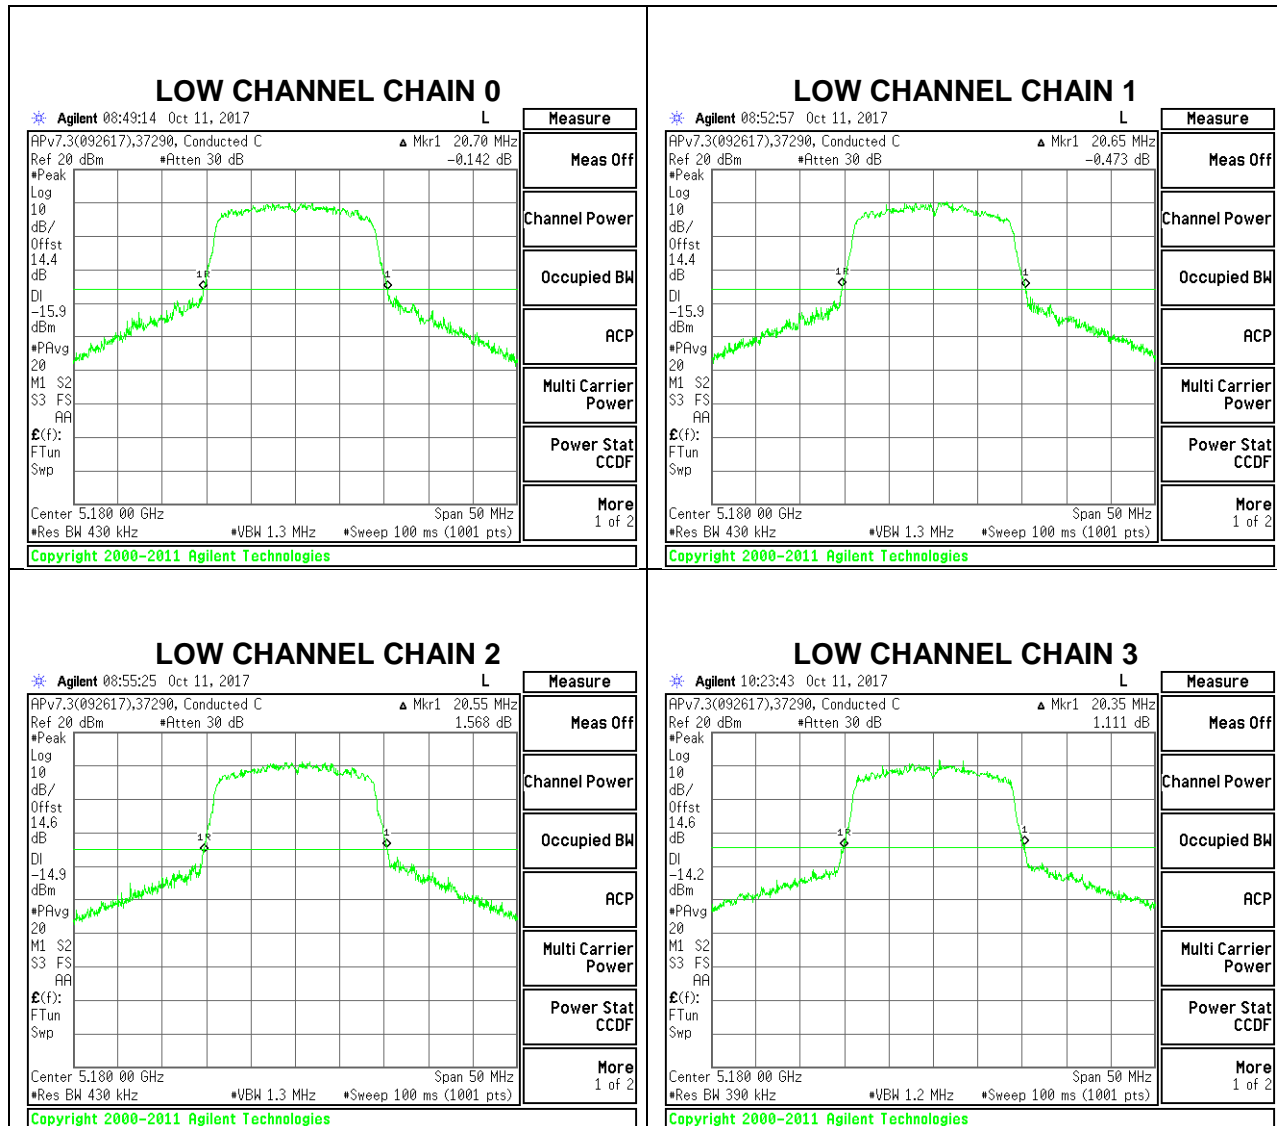

### MID CHANNEL

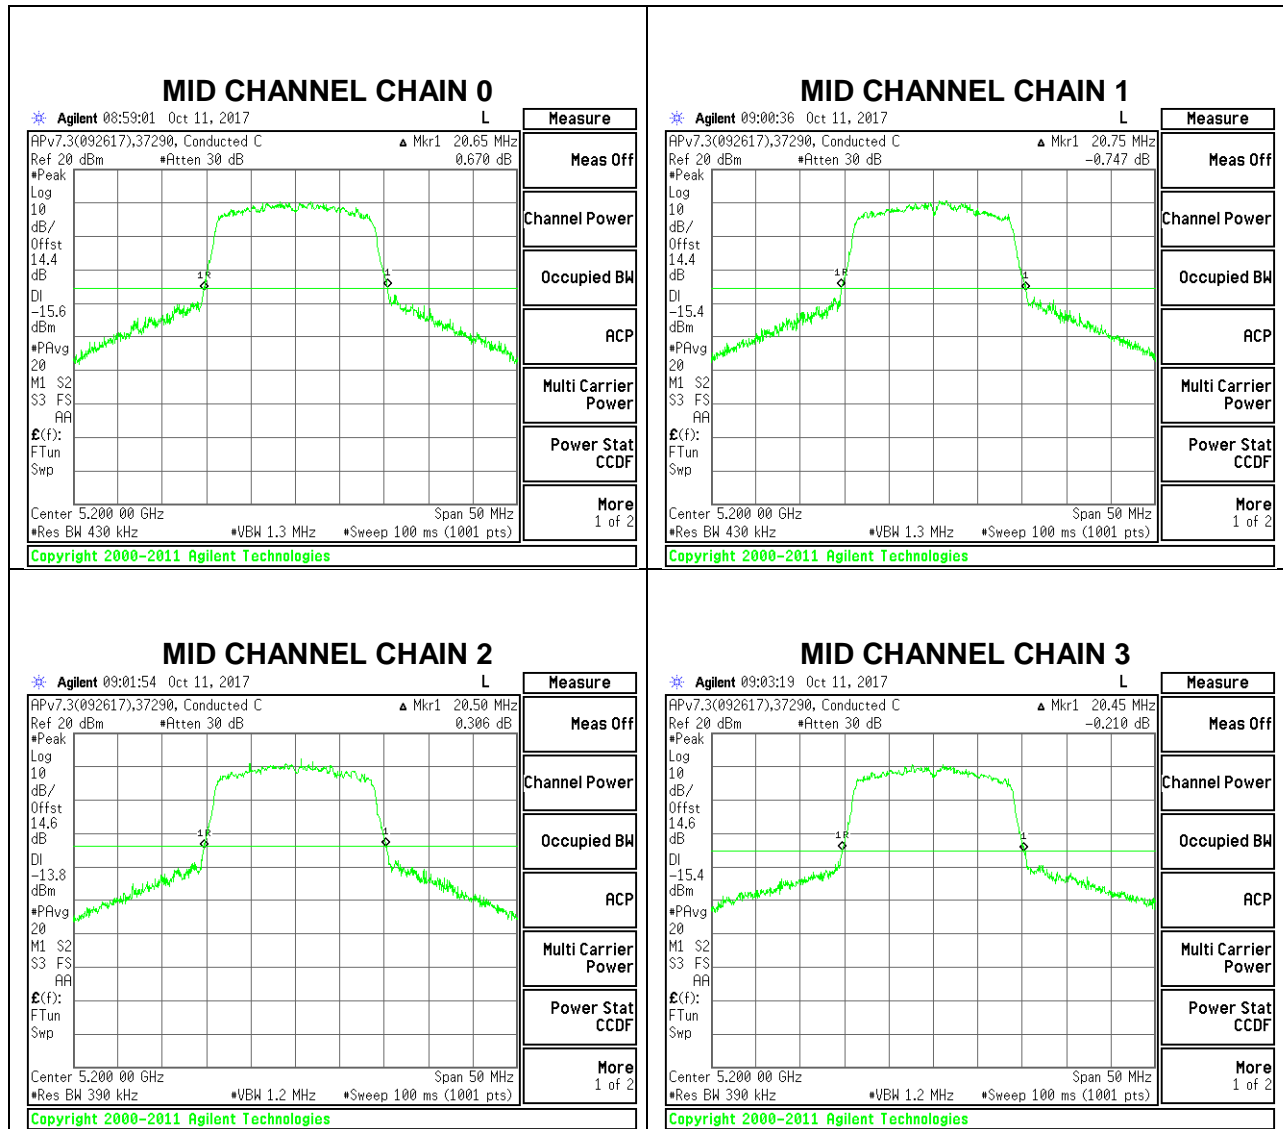

### HIGH CHANNEL

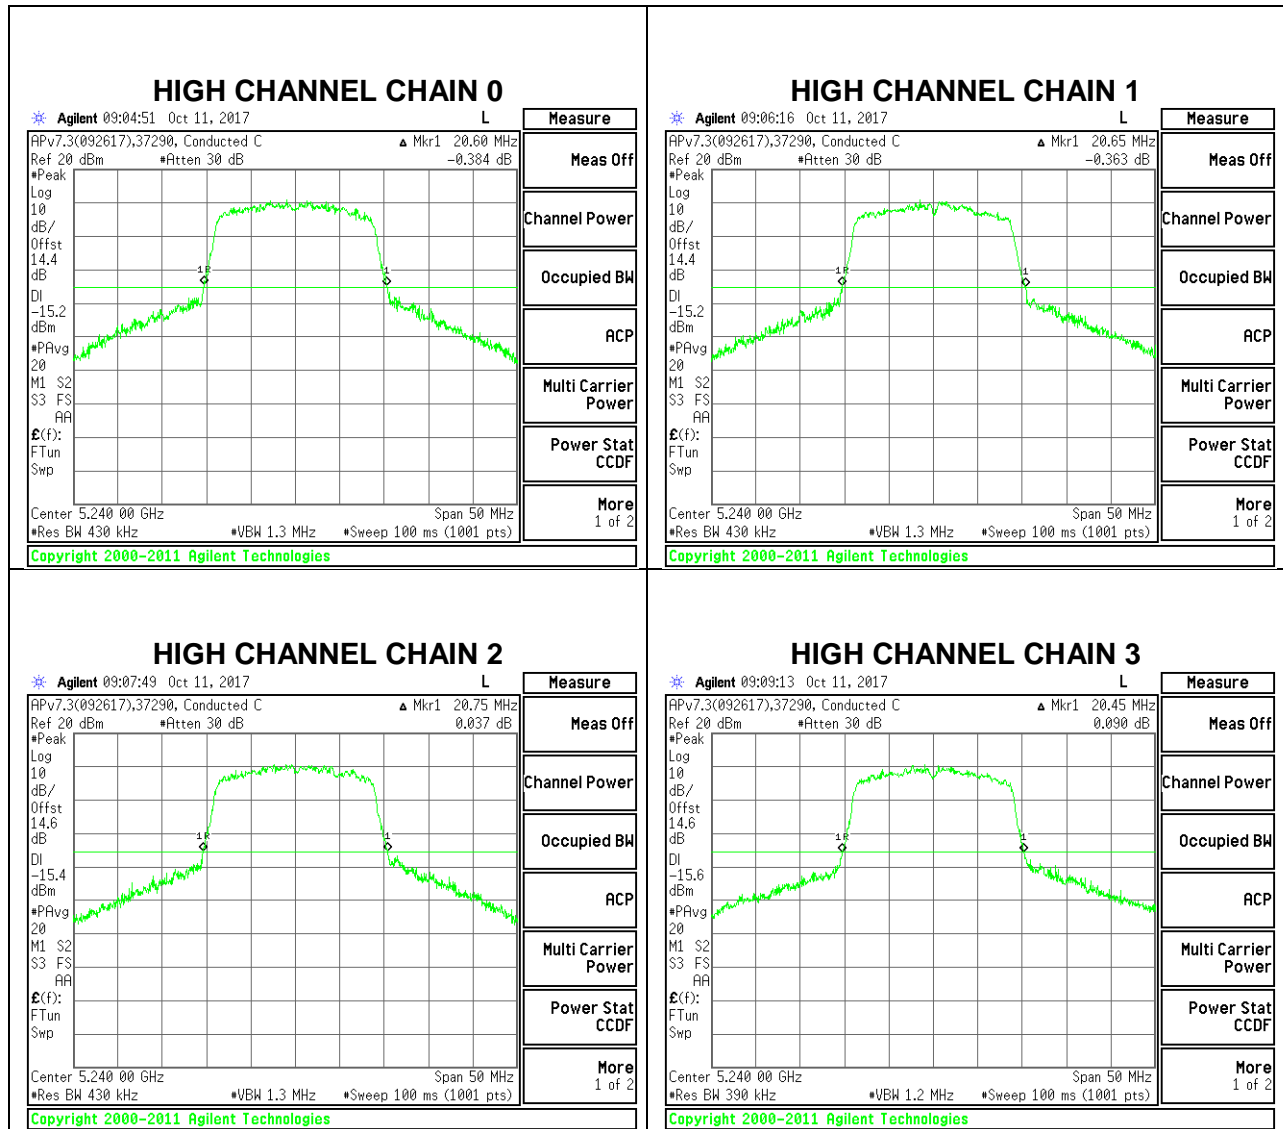


### 6.2.2. 802.11n HT20 MODE IN THE 5.3 GHz BAND

#### 4TX CDD MODE


Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	26 dB Bandwidth Chain 2 (MHz)	26 dB Bandwidth Chain 3 (MHz)
Low	5260	20.60	20.75	20.75	20.50
Mid	5300	20.65	20.85	21.75	20.55
High	5320	20.55	20.80	<b>22.05</b>	20.50

#### LOW CHANNEL

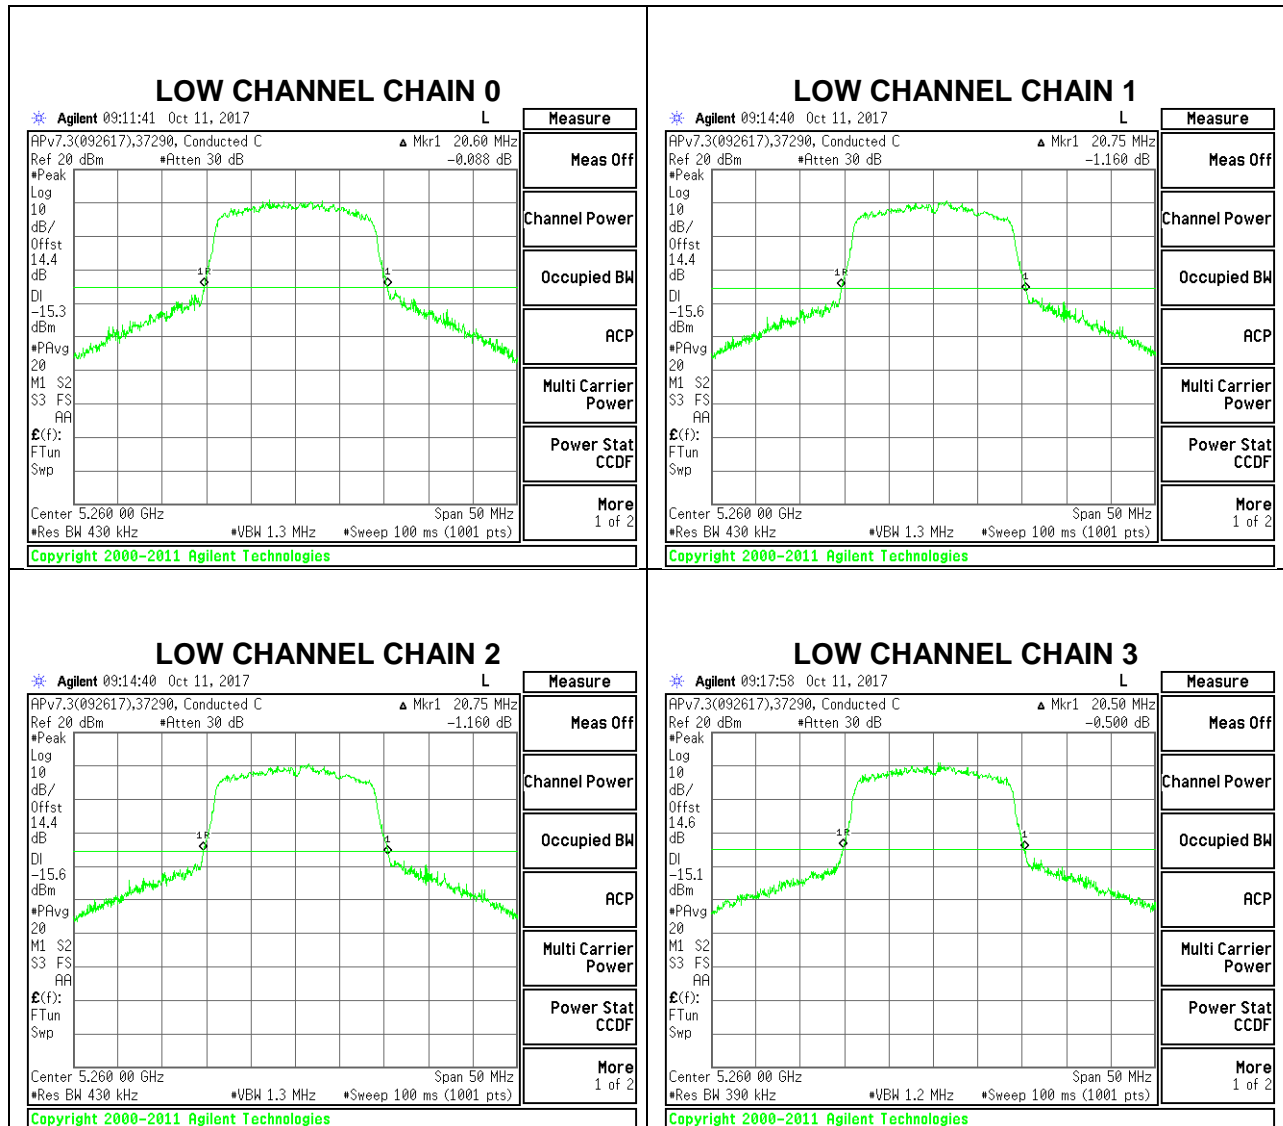




### MID CHANNEL

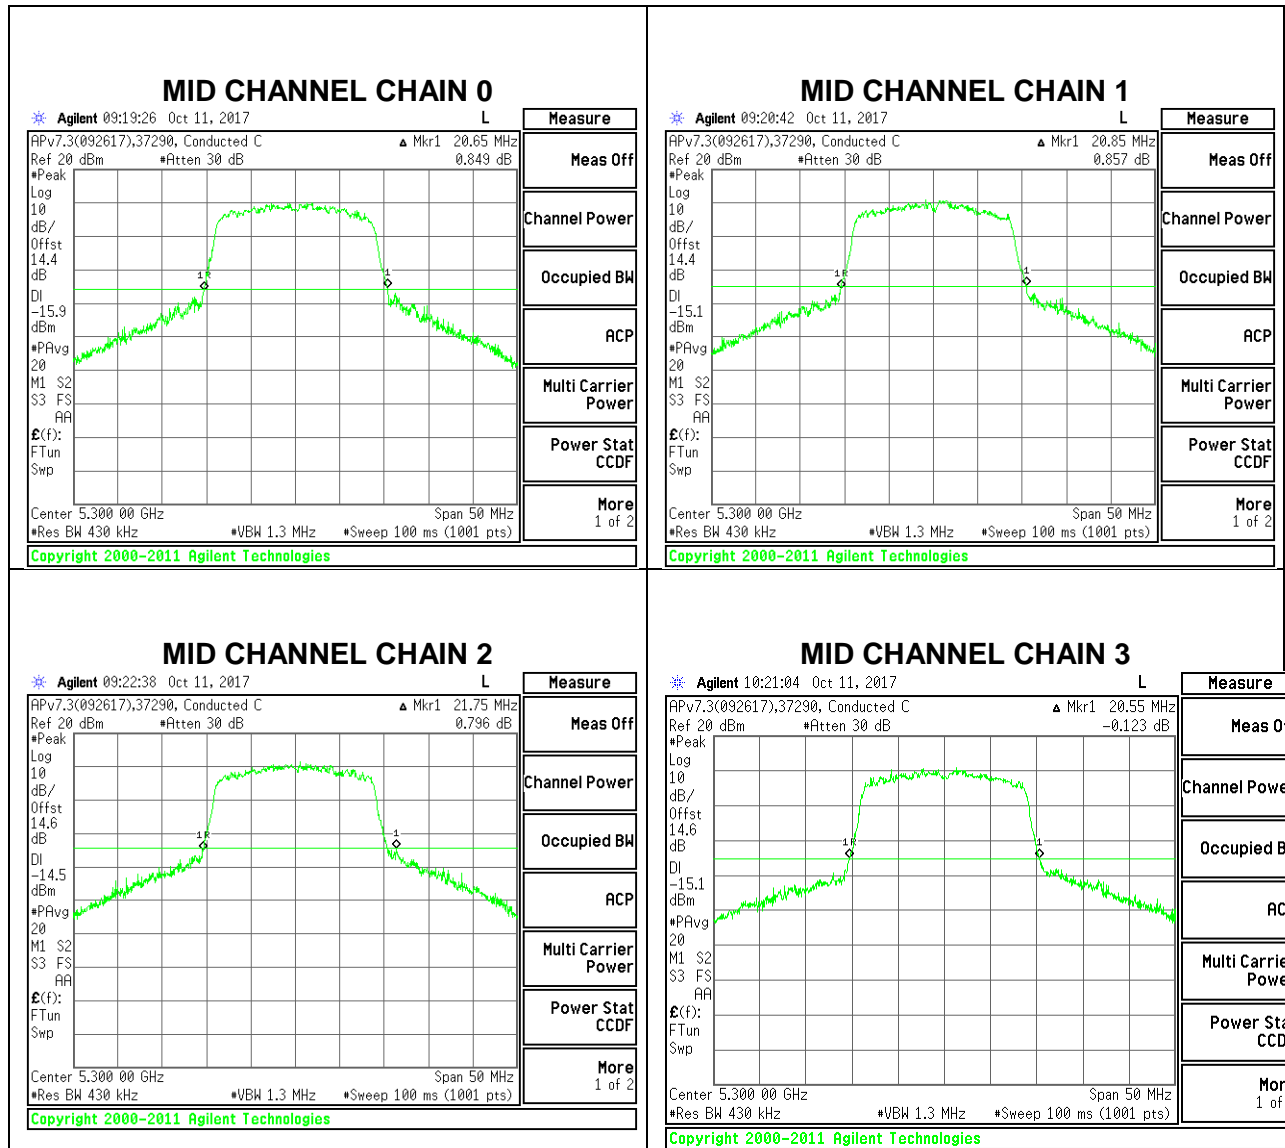

### HIGH CHANNEL

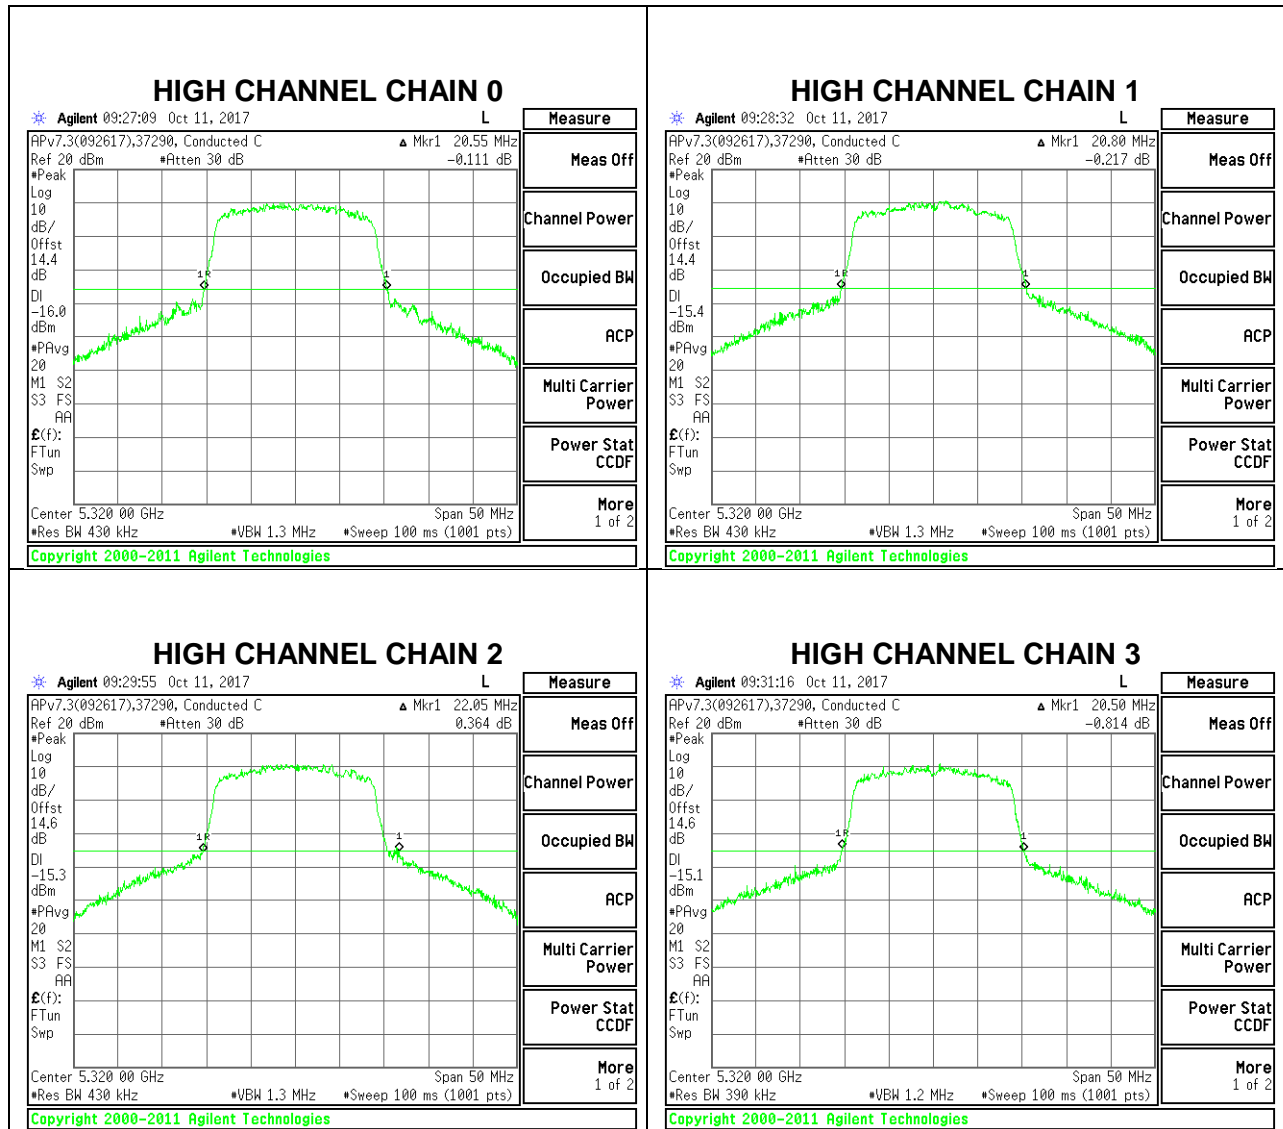


### 6.2.3. 802.11n HT20 MODE IN THE 5.6 GHz BAND


#### 4TX CDD MODE

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	26 dB Bandwidth Chain 2 (MHz)	26 dB Bandwidth Chain 3 (MHz)
Low	5500	20.60	20.75	20.60	20.35
Mid	5580	20.45	20.85	20.80	20.30
High	5700	20.55	20.75	<b>23.95</b>	22.10


#### LOW CHANNEL

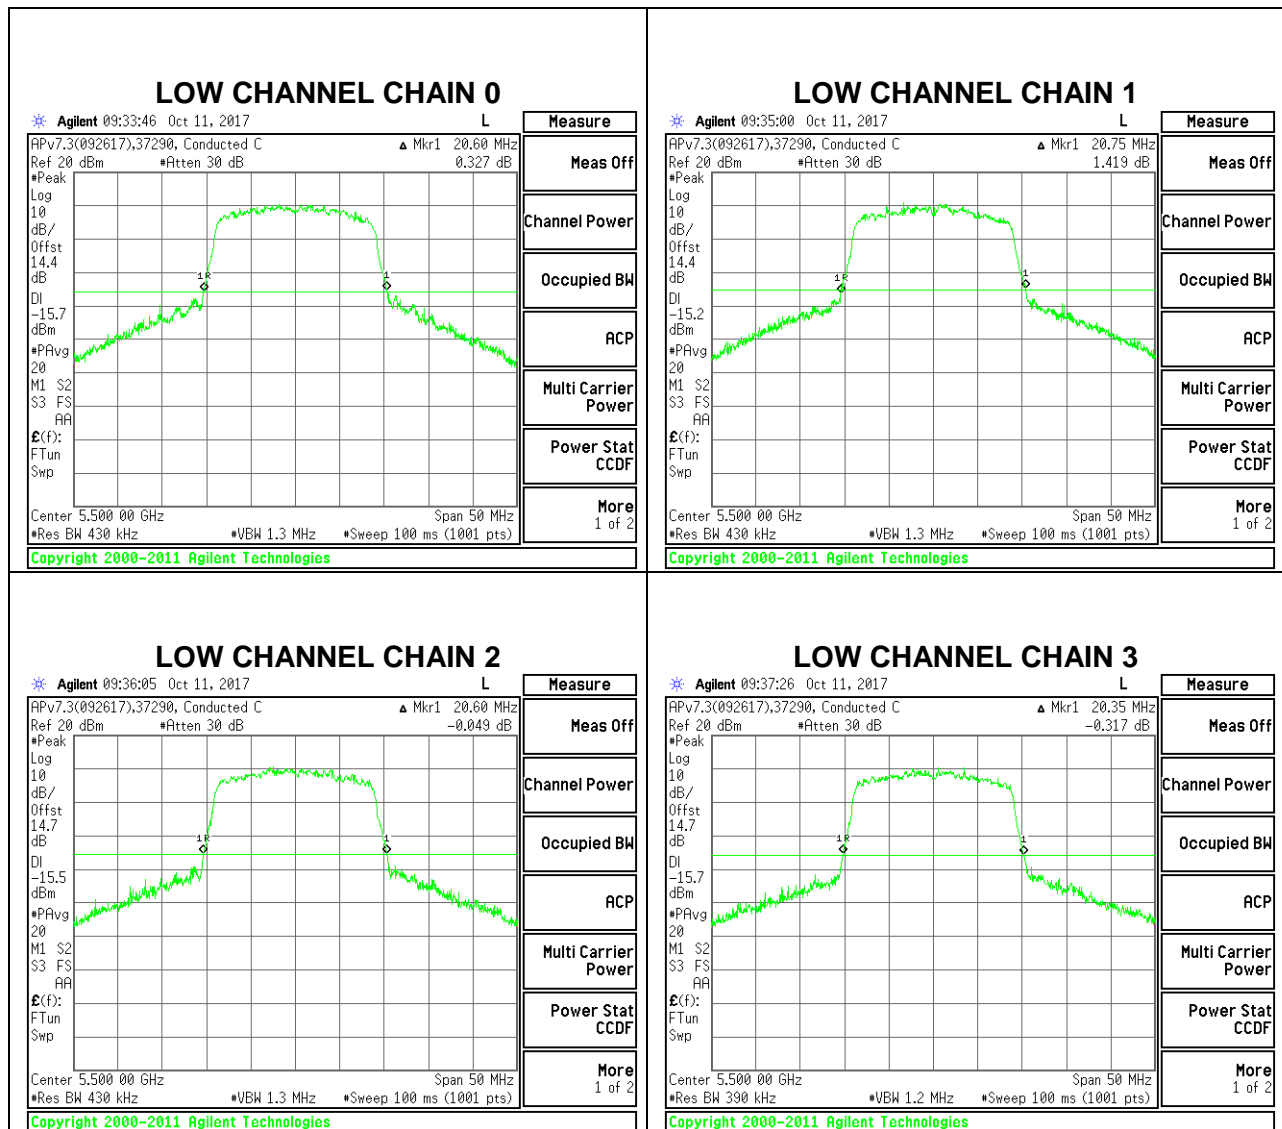

### MID CHANNEL

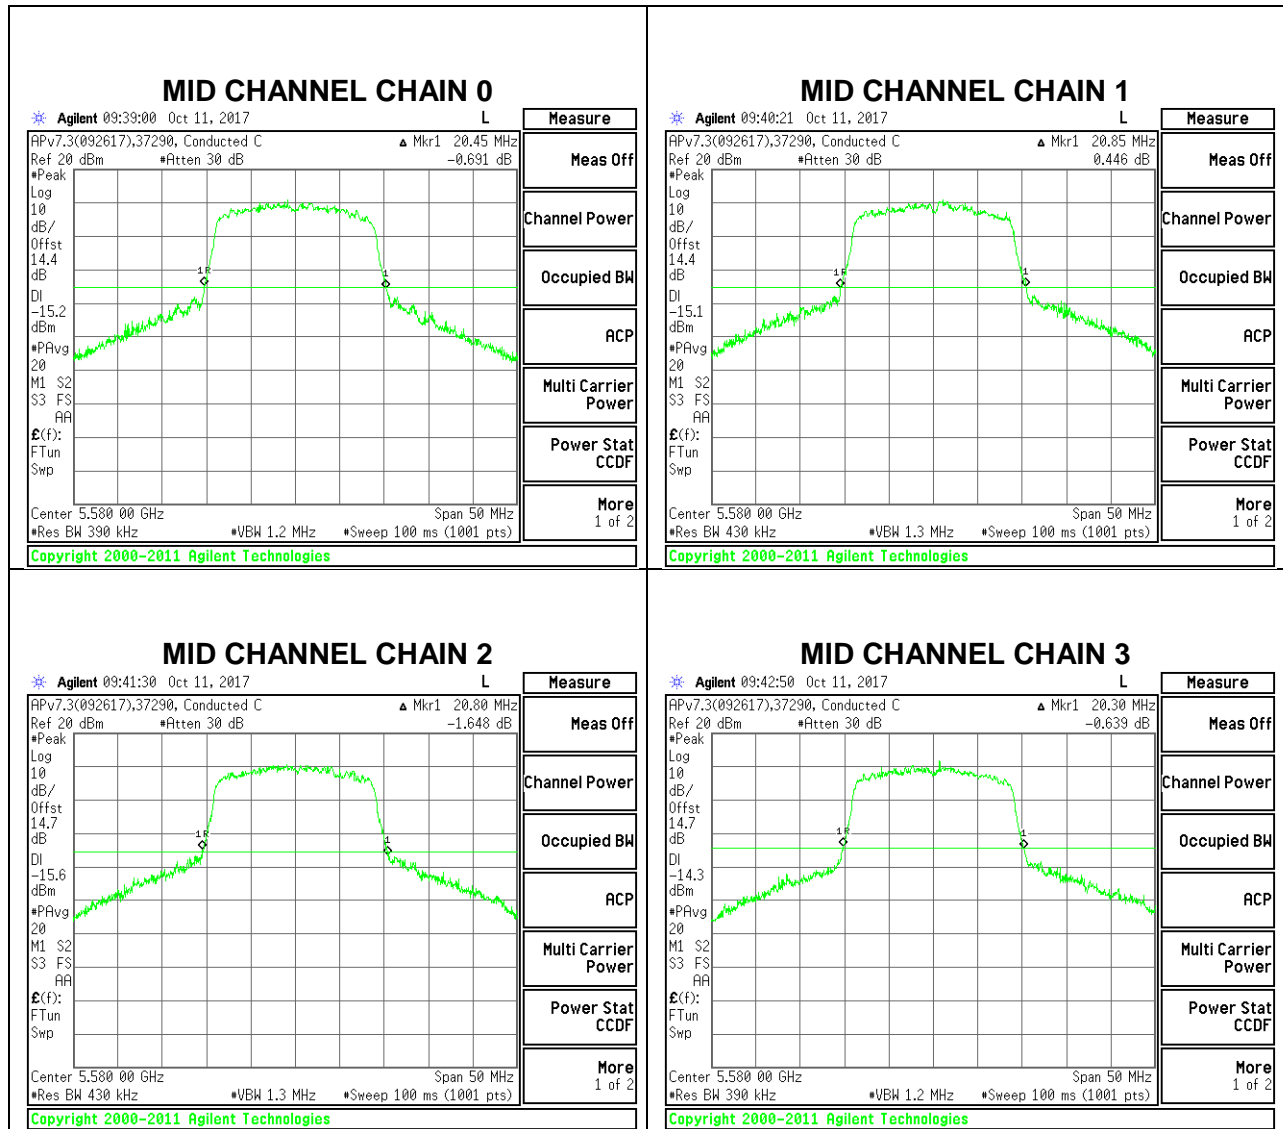

### HIGH CHANNEL

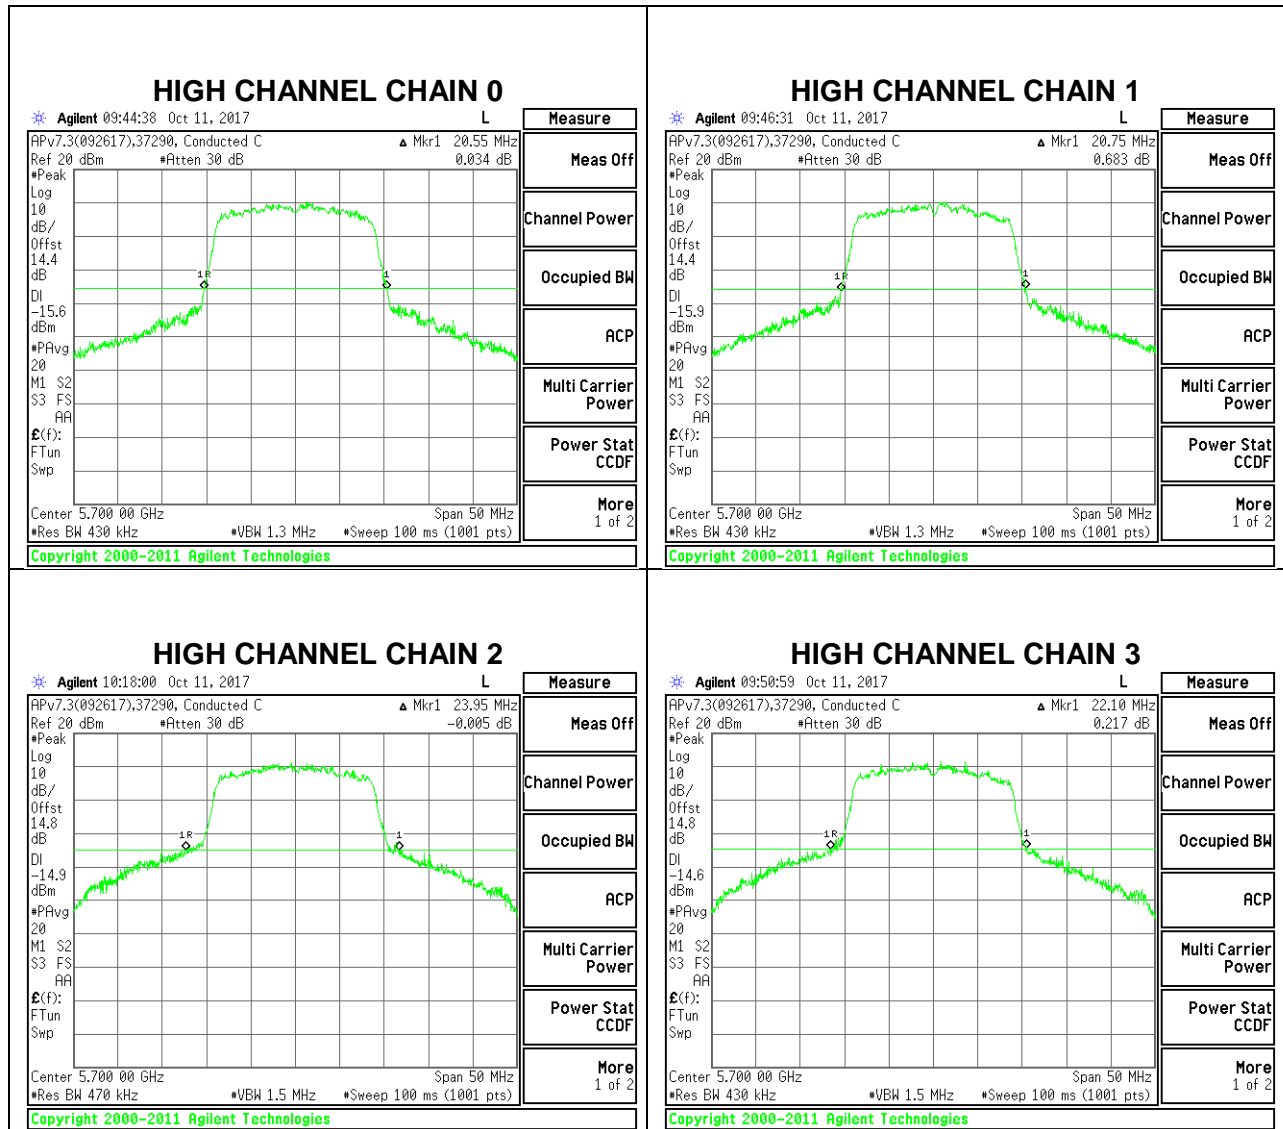


### 6.2.4. 802.11n HT20 MODE IN THE 5.8 GHz BAND


#### 4TX CDD MODE

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	26 dB Bandwidth Chain 2 (MHz)	26 dB Bandwidth Chain 3 (MHz)
Low	5745	20.60	21.30	<b>22.40</b>	20.60
Mid	5785	20.55	20.85	20.85	20.40
High	5825	20.70	20.85	20.65	20.55





#### LOW CHANNEL

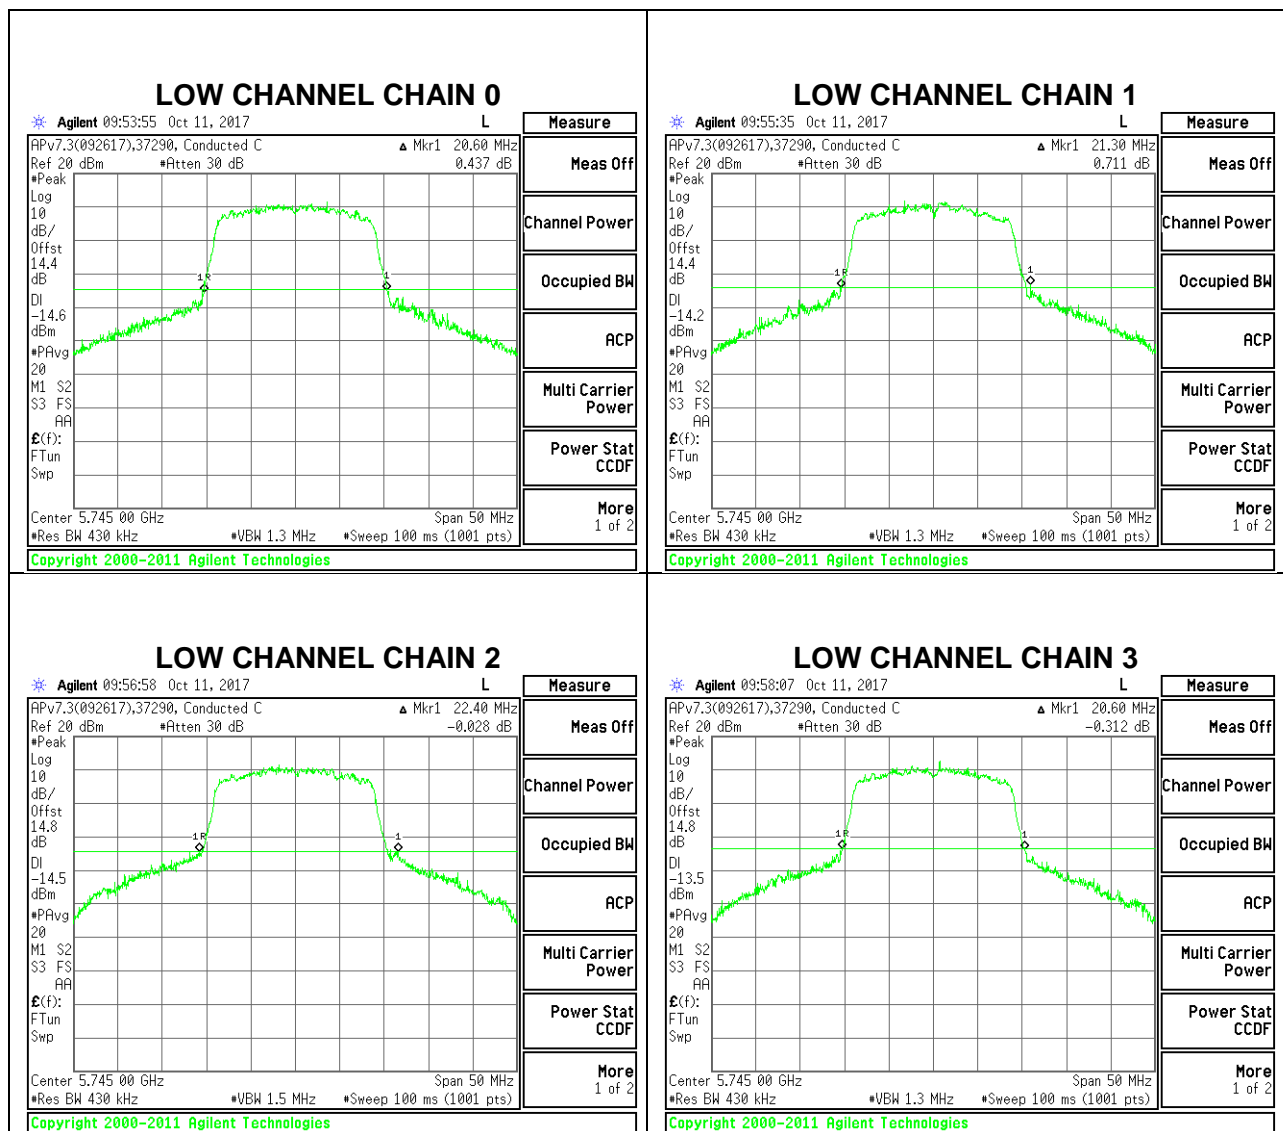

### MID CHANNEL

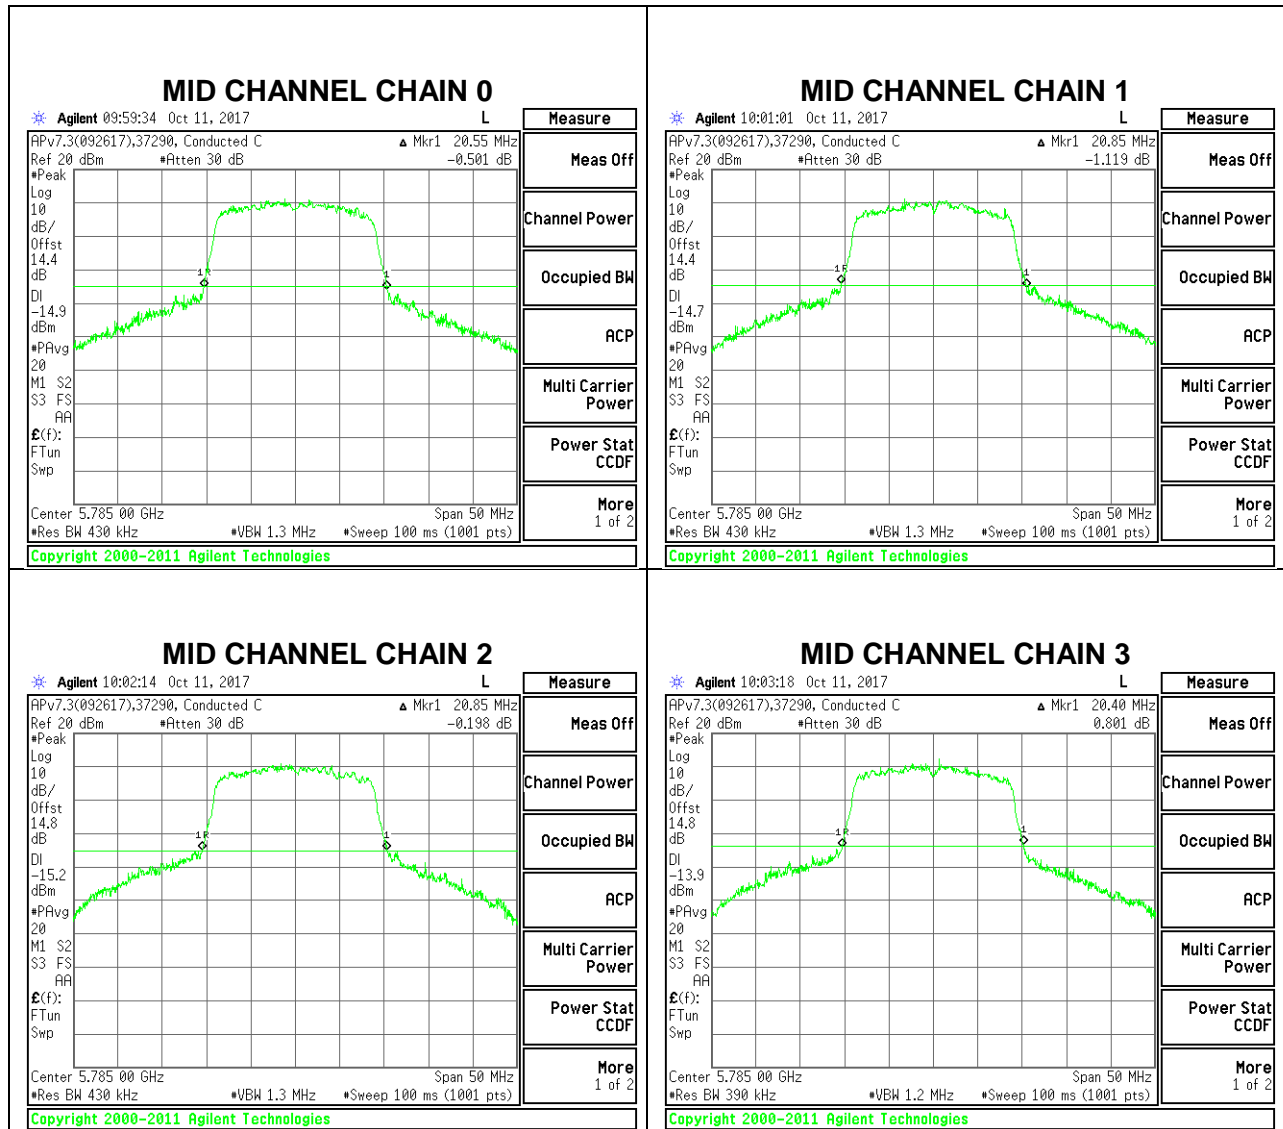

### HIGH CHANNEL

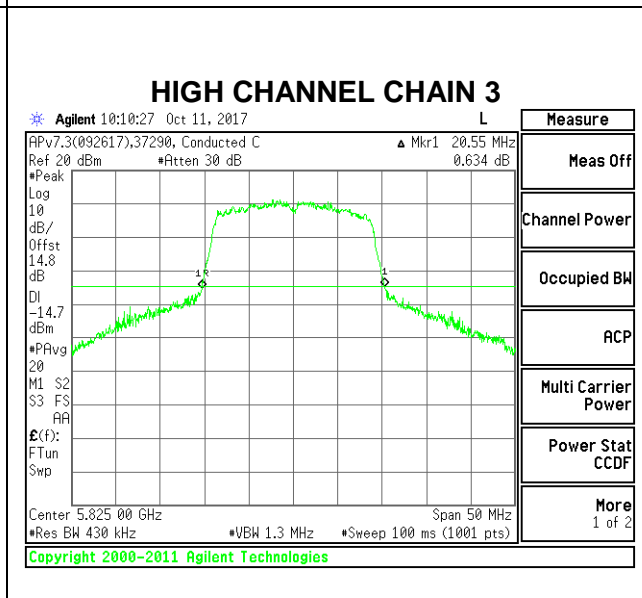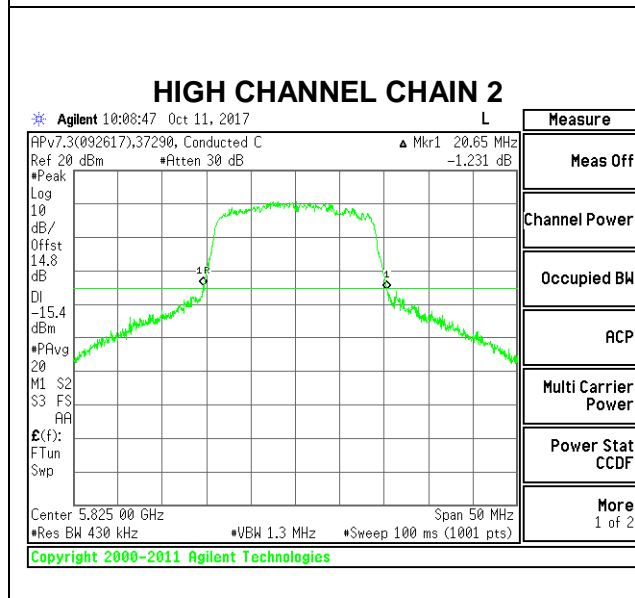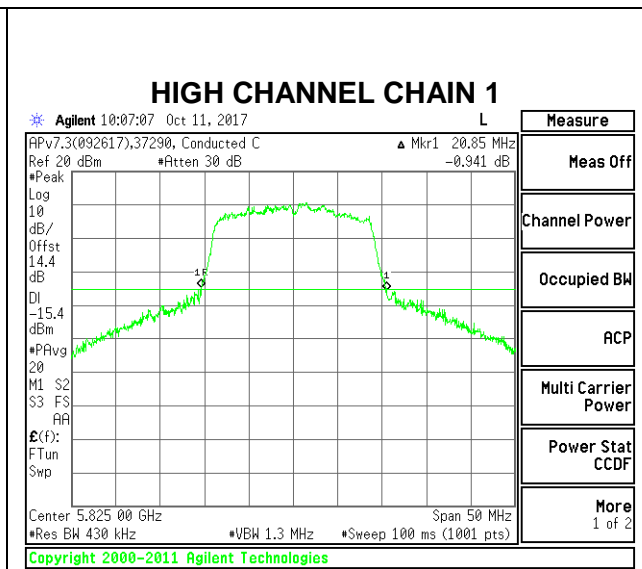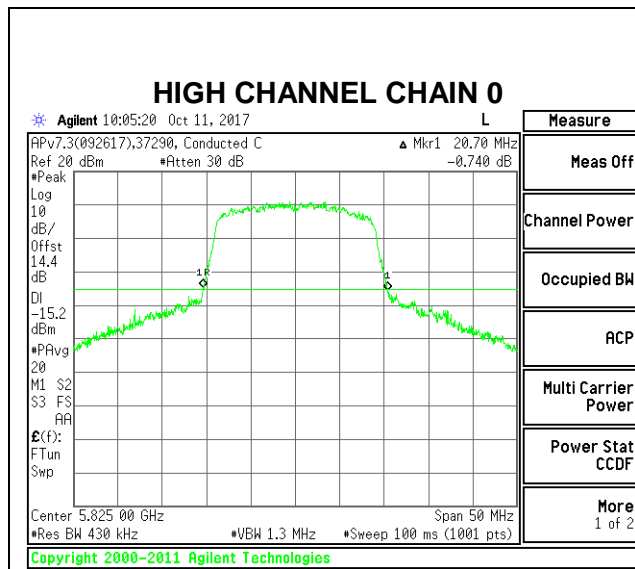



### **6.3. 99% BANDWIDTH**

#### **LIMITS**

None; for reporting purposes only.


#### **RESULTS**

### 6.3.1. 802.11n HT20 MODE IN THE 5.2 GHZ BAND


#### 4TX CDD MODE

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)	99% Bandwidth Chain 2 (MHz)	99% Bandwidth Chain 3 (MHz)
Low	5180	17.3965	17.2892	17.2154	17.2360
Mid	5200	17.4835	17.2889	17.3892	17.2899
High	5240	<b>17.5062</b>	17.2632	17.2984	17.3748


#### LOW CHANNEL

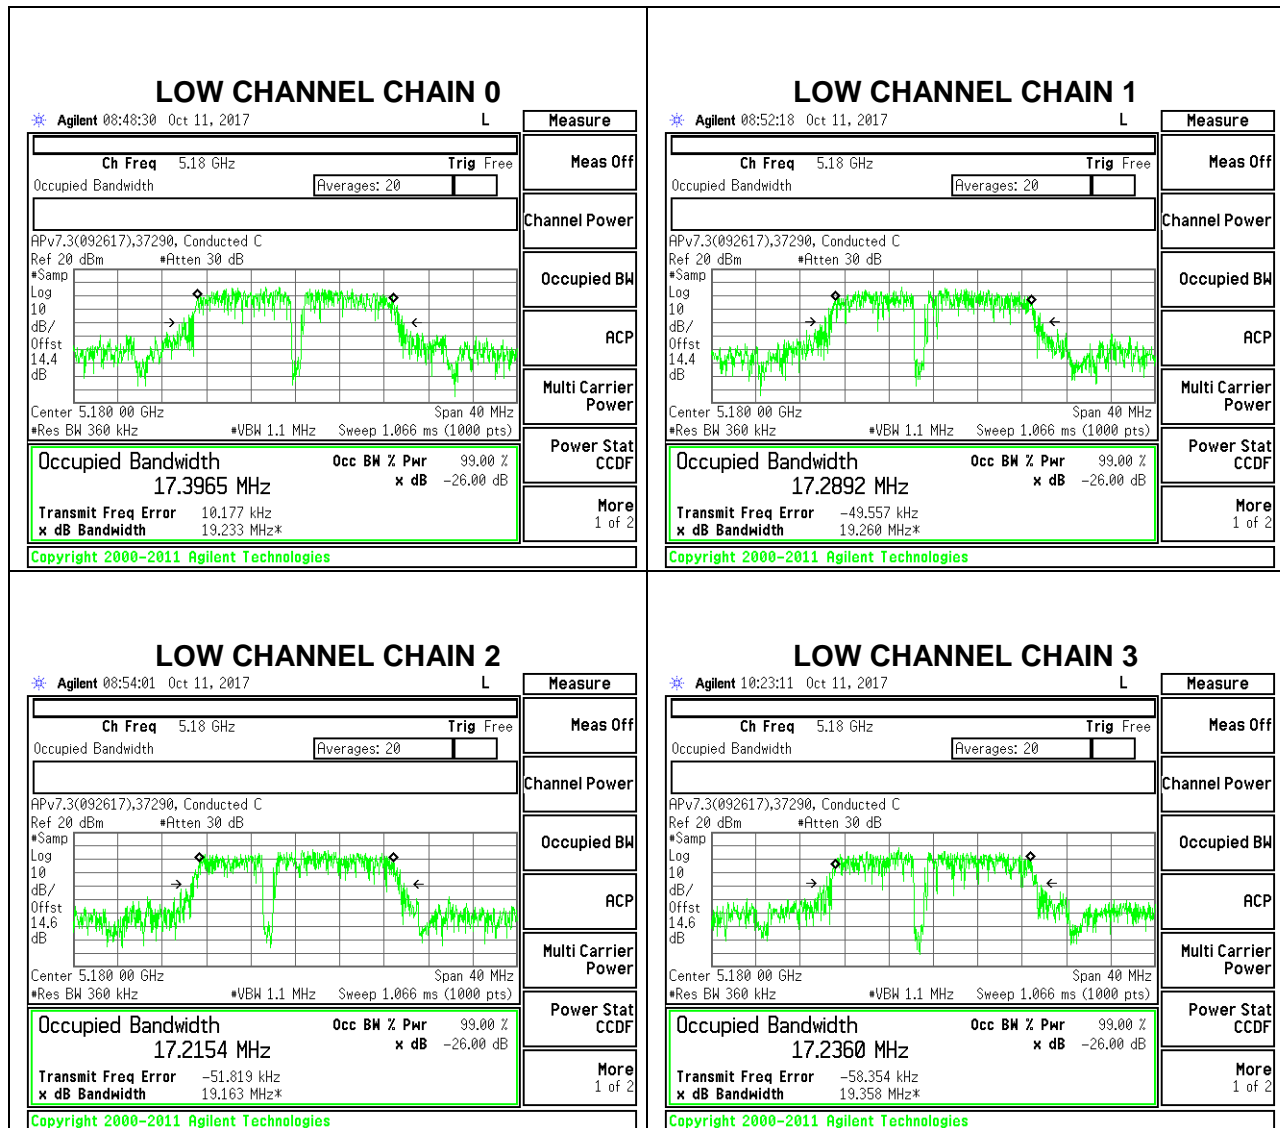

### MID CHANNEL

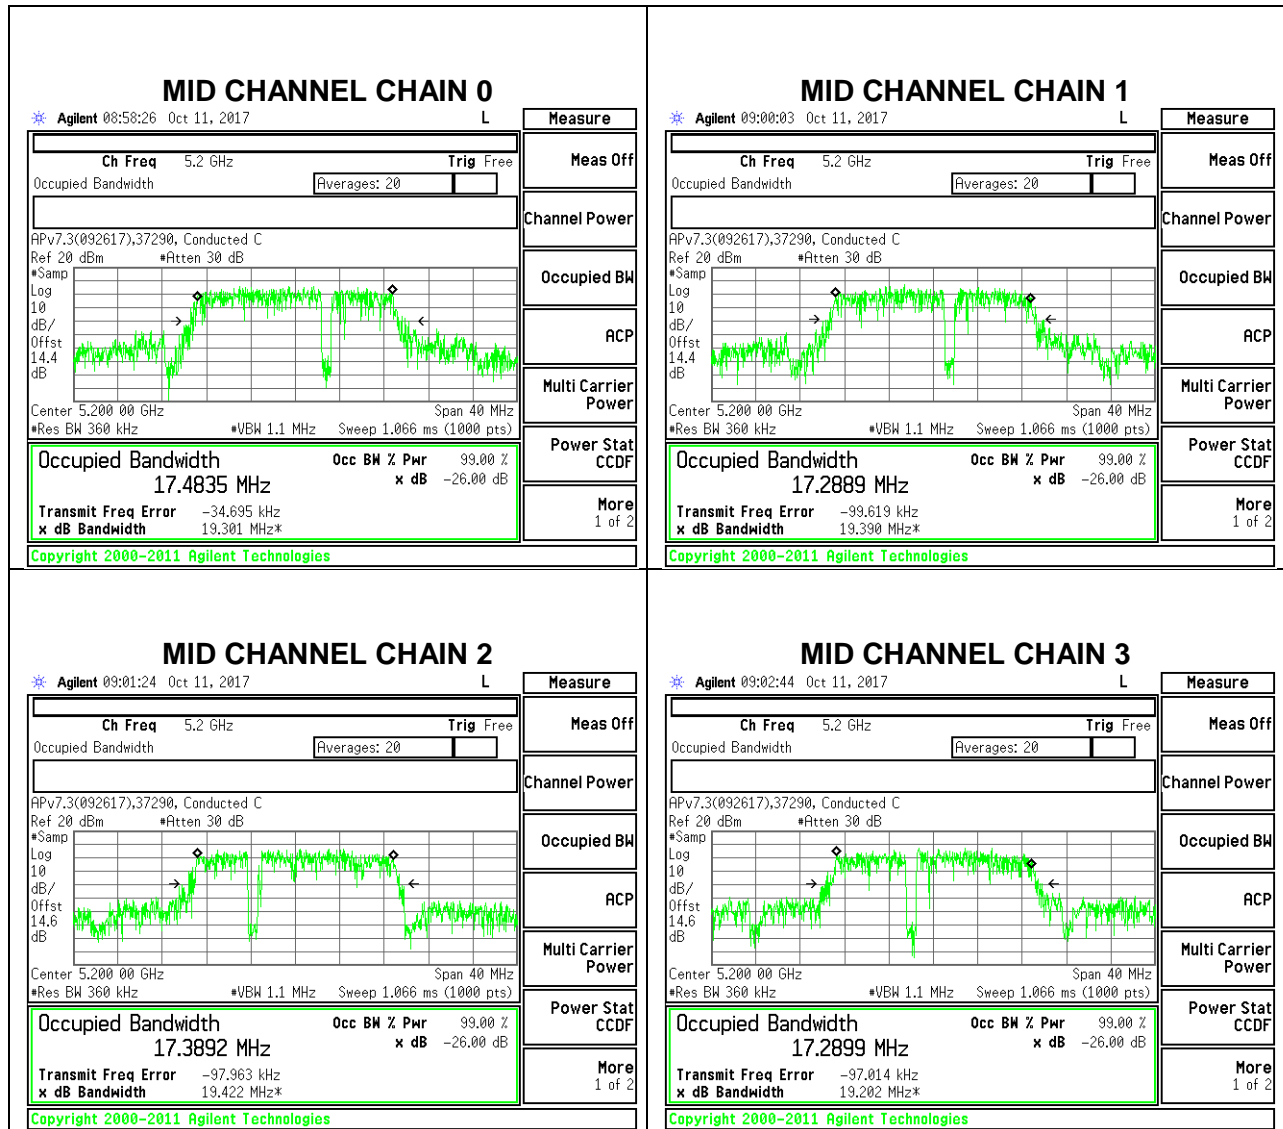

### HIGH CHANNEL

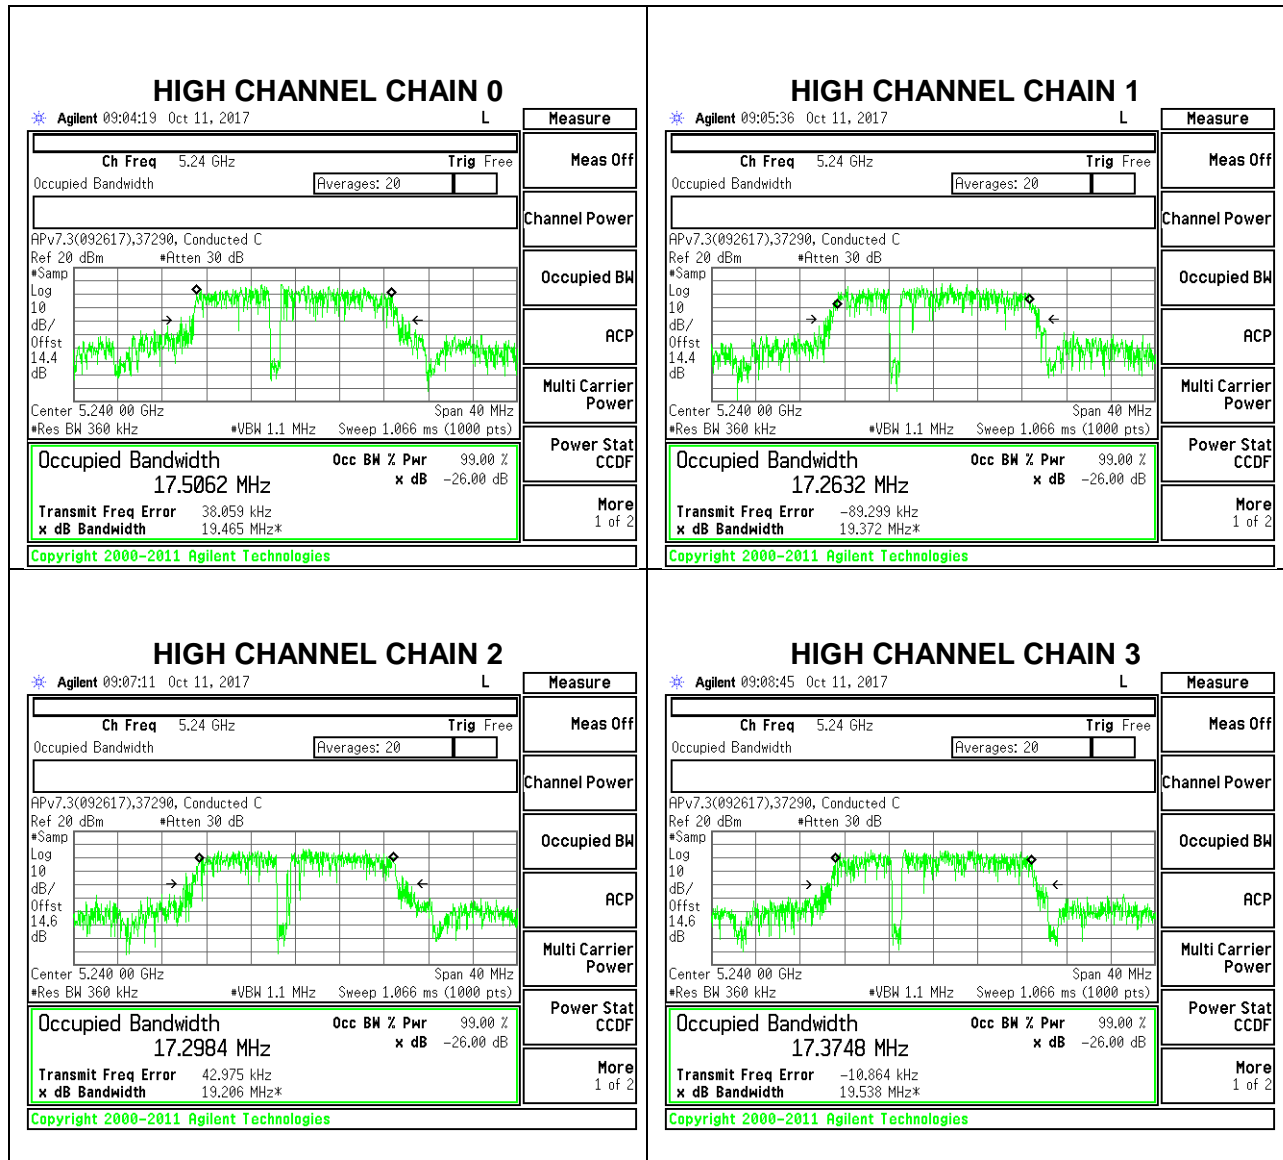

### 6.3.2. 802.11n HT20 MODE IN THE 5.3 GHZ BAND

#### 4TX CDD MODE

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)	99% Bandwidth Chain 2 (MHz)	99% Bandwidth Chain 3 (MHz)
Low	5260	17.3825	<b>17.4743</b>	17.1521	17.4358
Mid	5300	17.0818	17.4709	17.2340	17.4330
High	5320	17.2895	17.4266	17.2000	17.2030

#### LOW CHANNEL

##### LOW CHANNEL CHAIN 0

Agilent 09:10:58 Oct 11, 2017

Ch Freq 5.26 GHz

Occupied Bandwidth

Center 5.260 00 GHz

Occupied Bandwidth: 17.3825 MHz

Transmit Freq Error: -70.439 kHz

x dB Bandwidth: 19.184 MHz\*

##### LOW CHANNEL CHAIN 1

Agilent 09:13:55 Oct 11, 2017

Ch Freq 5.26 GHz

Occupied Bandwidth

Center 5.260 00 GHz

Occupied Bandwidth: 17.4743 MHz

Transmit Freq Error: 24.433 kHz

x dB Bandwidth: 19.078 MHz\*

##### LOW CHANNEL CHAIN 2

Agilent 09:15:18 Oct 11, 2017

Ch Freq 5.26 GHz

Occupied Bandwidth

Center 5.260 00 GHz

Occupied Bandwidth: 17.1521 MHz

Transmit Freq Error: -128.470 kHz

x dB Bandwidth: 19.147 MHz\*

##### LOW CHANNEL CHAIN 3

Agilent 09:17:05 Oct 11, 2017

Ch Freq 5.26 GHz

Occupied Bandwidth


Center 5.260 00 GHz

Occupied Bandwidth: 17.4358 MHz


Transmit Freq Error: 31.284 kHz

x dB Bandwidth: 19.256 MHz\*

### MID CHANNEL

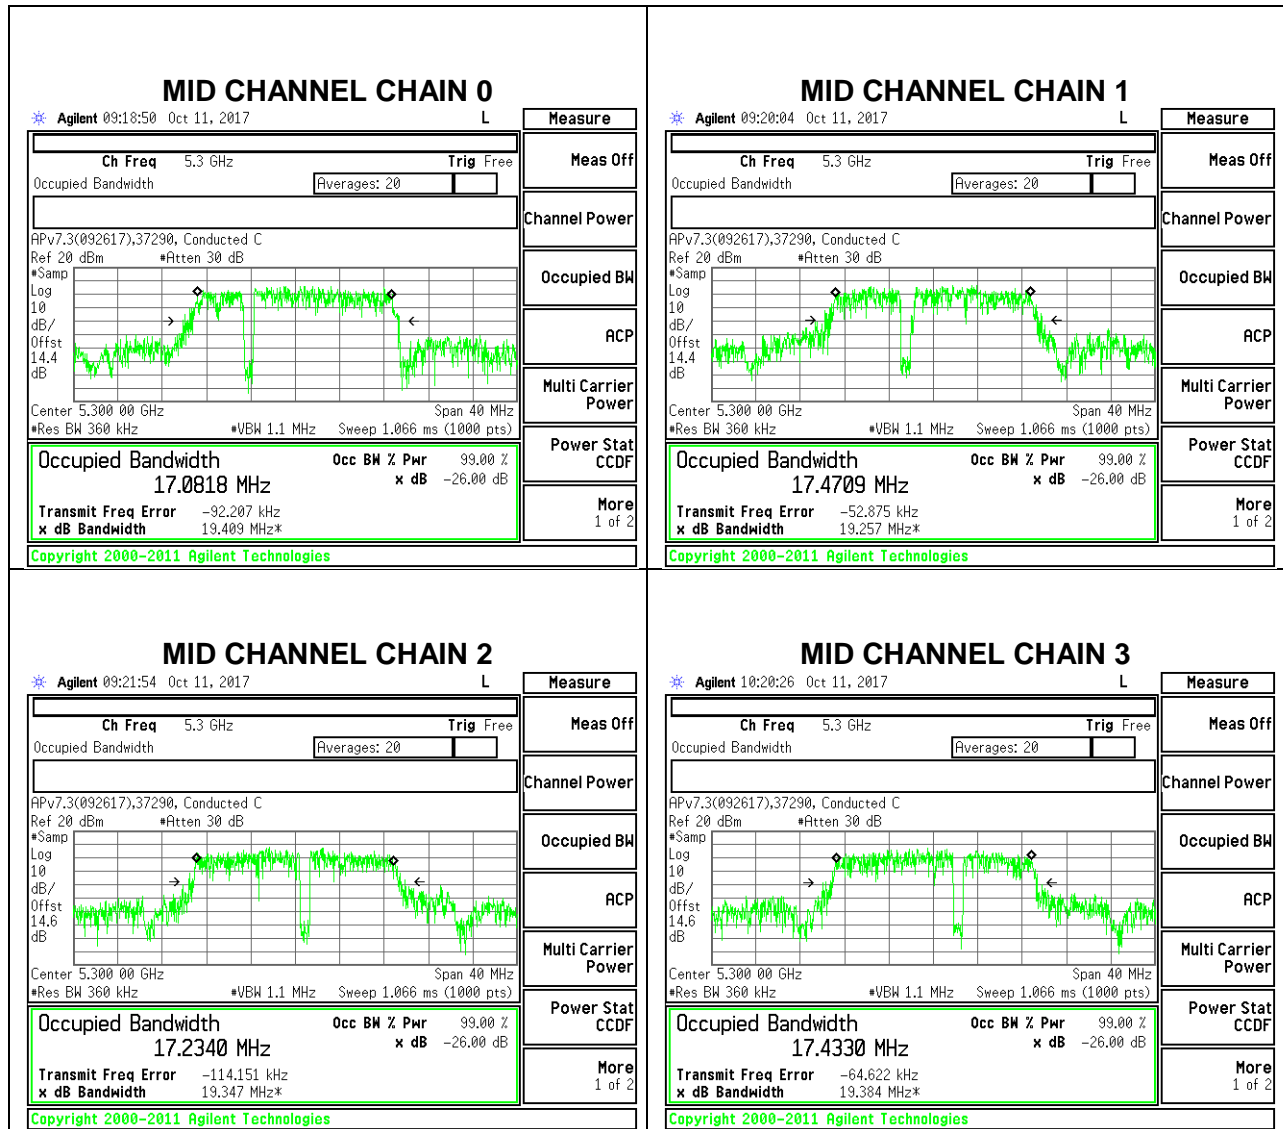

### HIGH CHANNEL

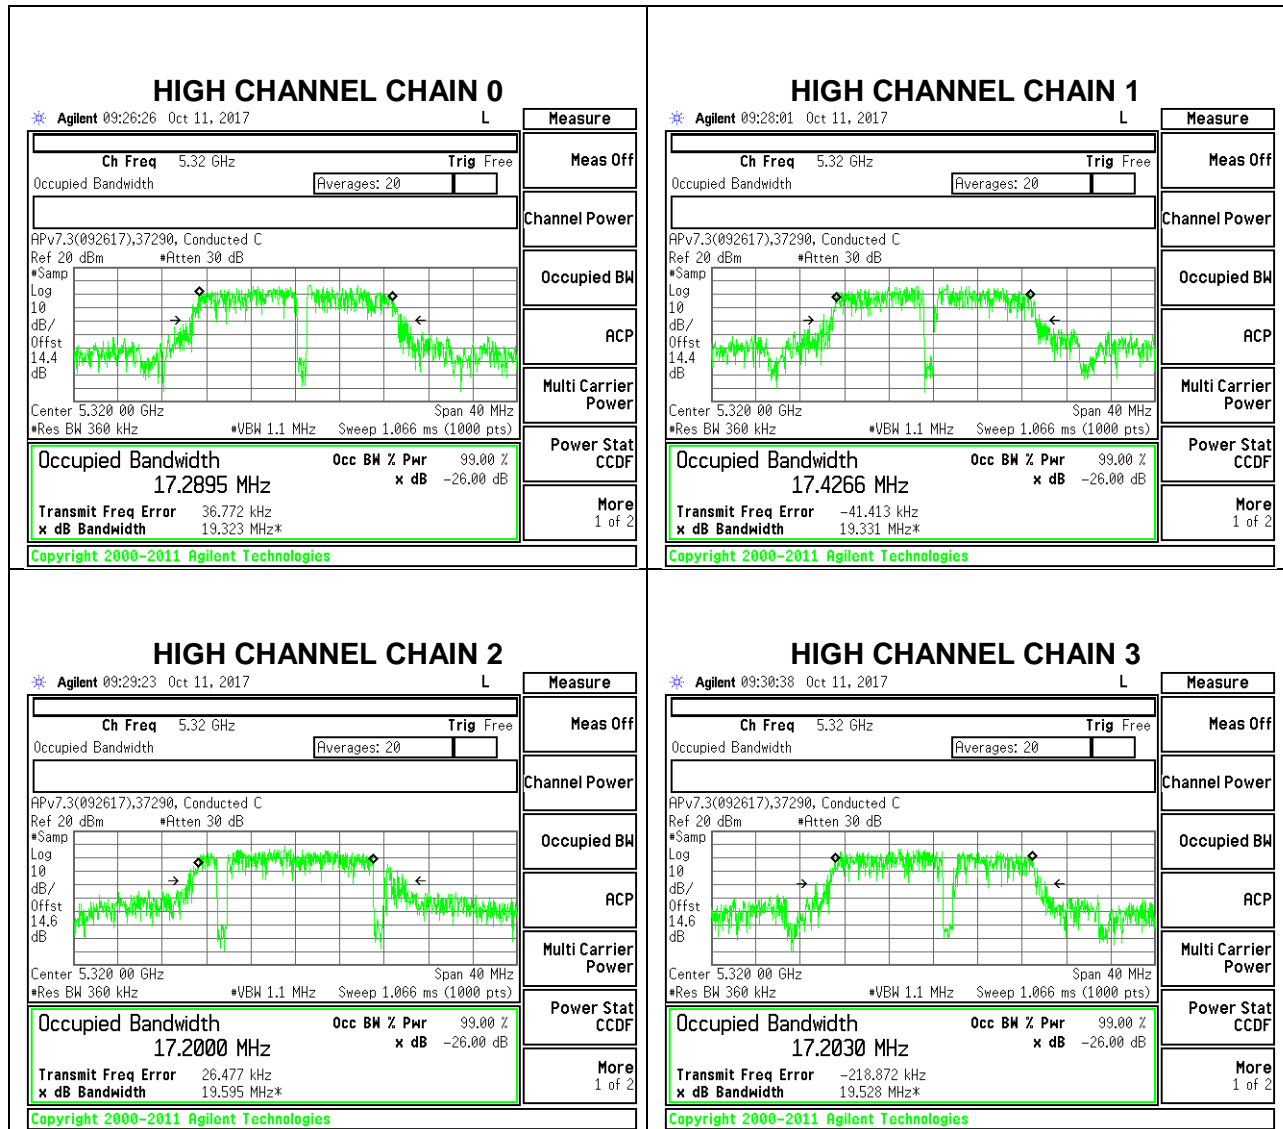


### 6.3.3. 802.11n HT20 MODE IN THE 5.6 GHz BAND

#### 4TX CDD MODE


Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)	99% Bandwidth Chain 2 (MHz)	99% Bandwidth Chain 3 (MHz)
Low	5500	17.3155	17.3680	17.1071	17.3678
Mid	5580	17.1954	17.4264	17.2722	<b>17.4321</b>
High	5700	17.4180	17.3142	17.2861	17.4189

#### LOW CHANNEL

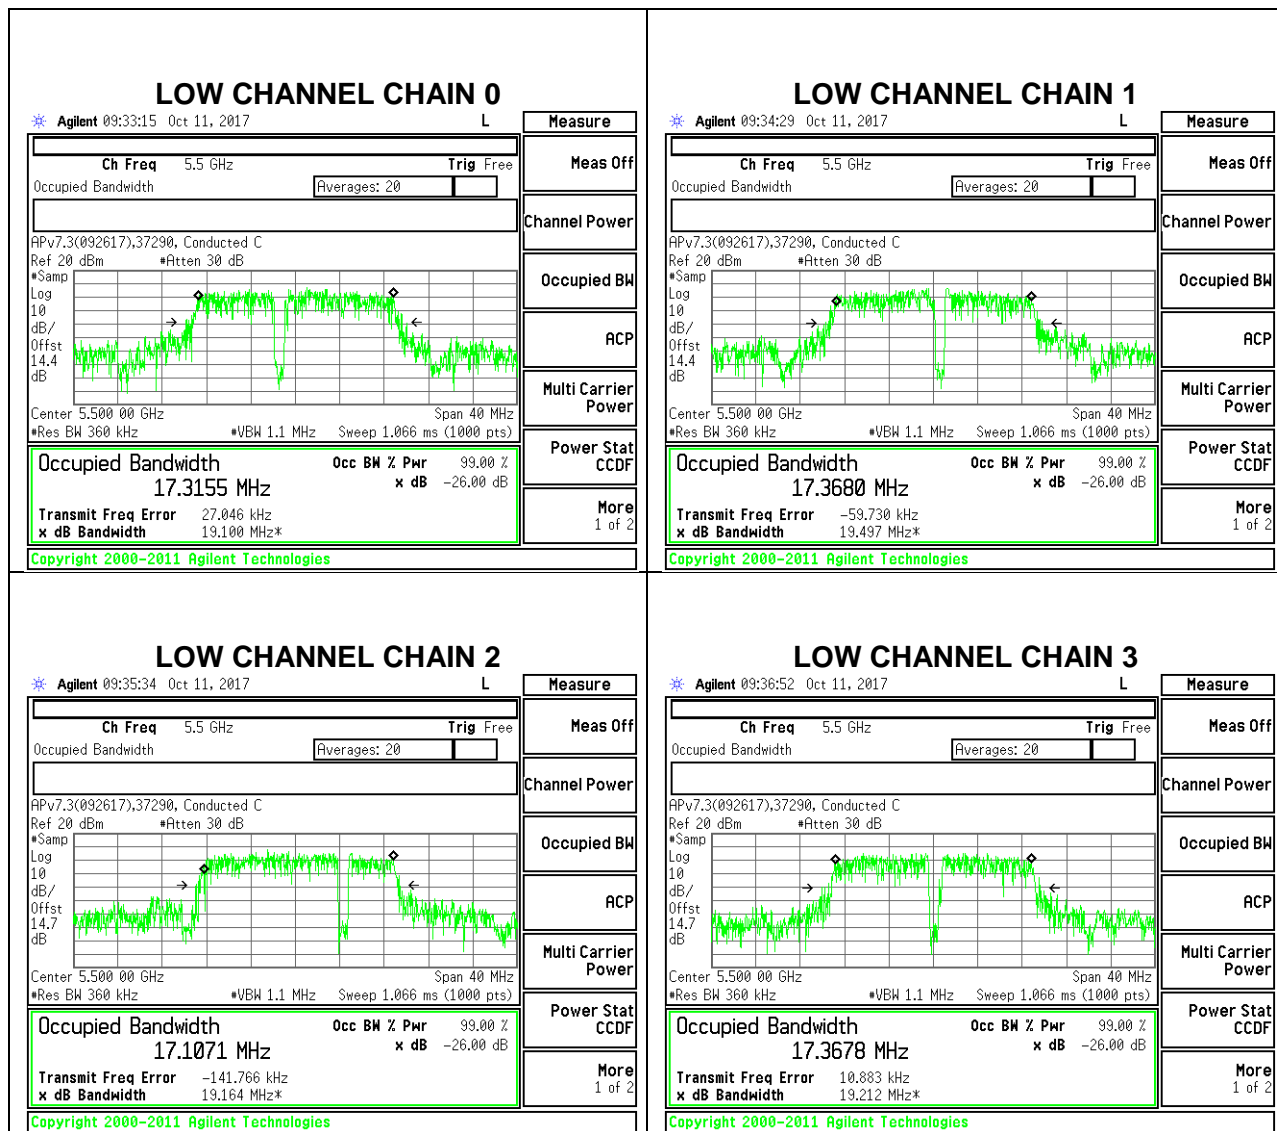




### MID CHANNEL

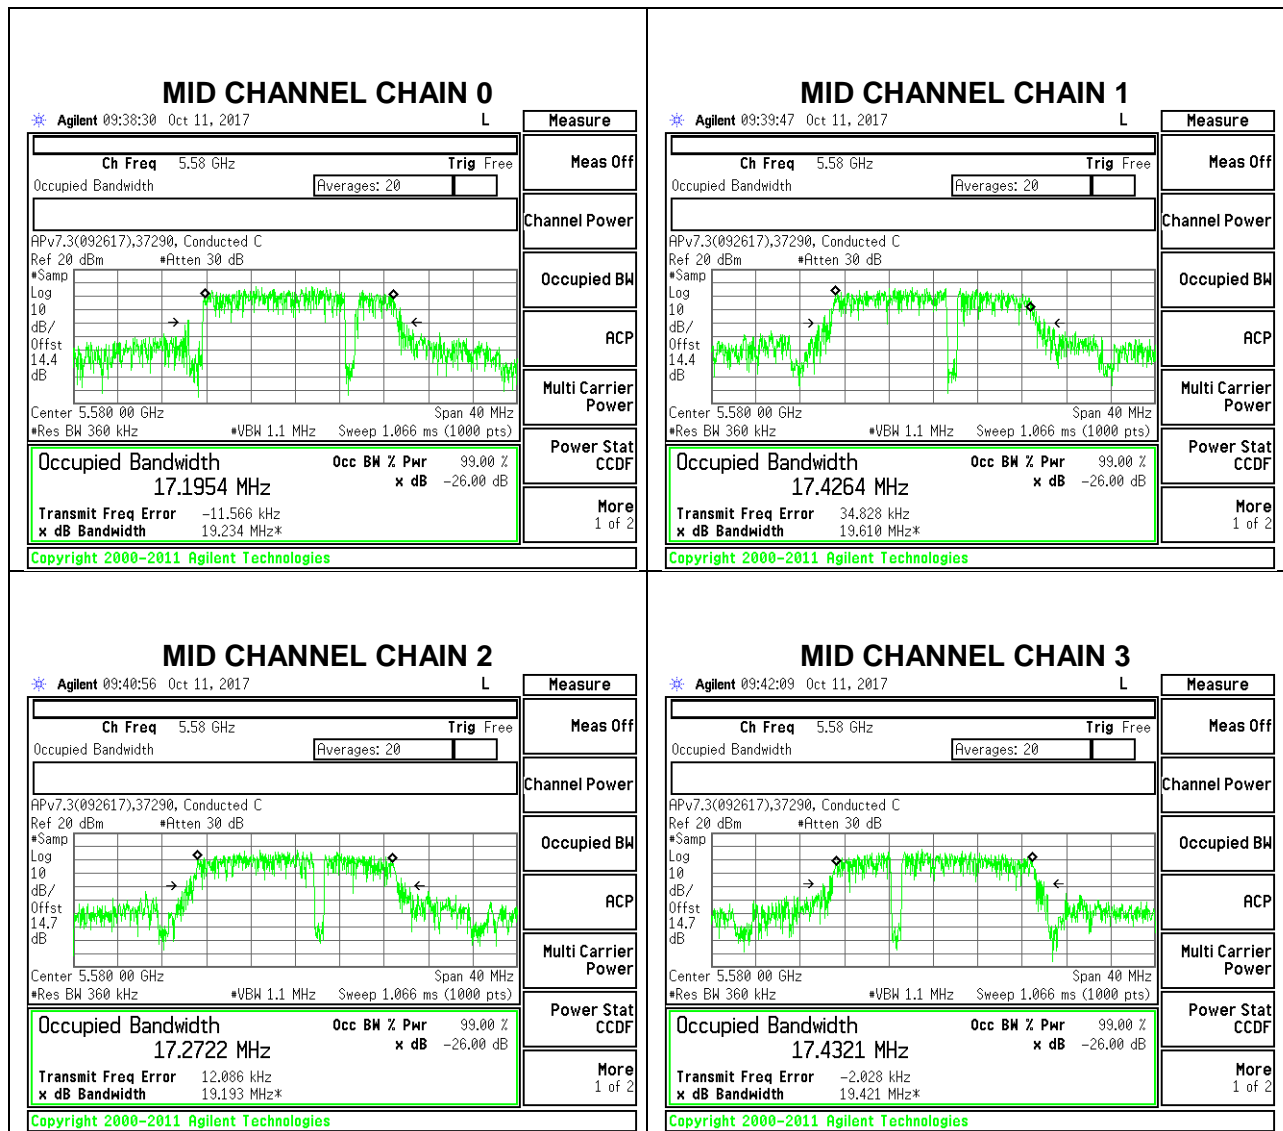

### HIGH CHANNEL

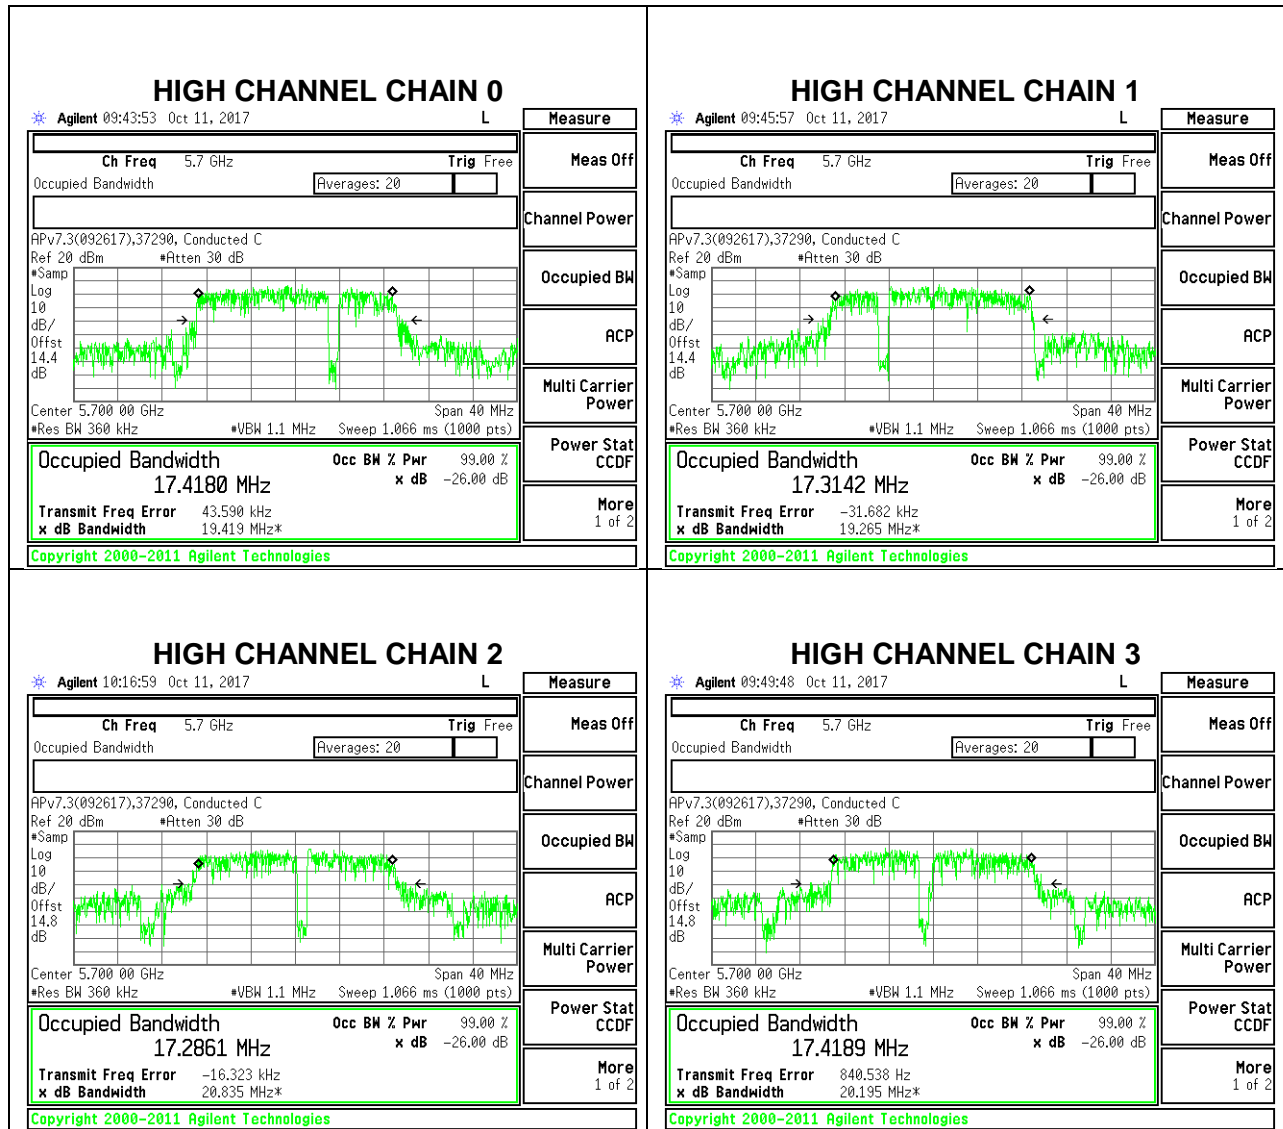


### 6.3.4. 802.11n HT20 MODE IN THE 5.8 GHz BAND


#### 4TX CDD MODE

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)	99% Bandwidth Chain 2 (MHz)	99% Bandwidth Chain 3 (MHz)
Low	5745	17.2505	17.4327	<b>17.5259</b>	17.2641
Mid	5785	17.3008	17.3438	17.4074	17.3632
High	5825	17.2965	17.3807	17.2661	17.4440


#### LOW CHANNEL

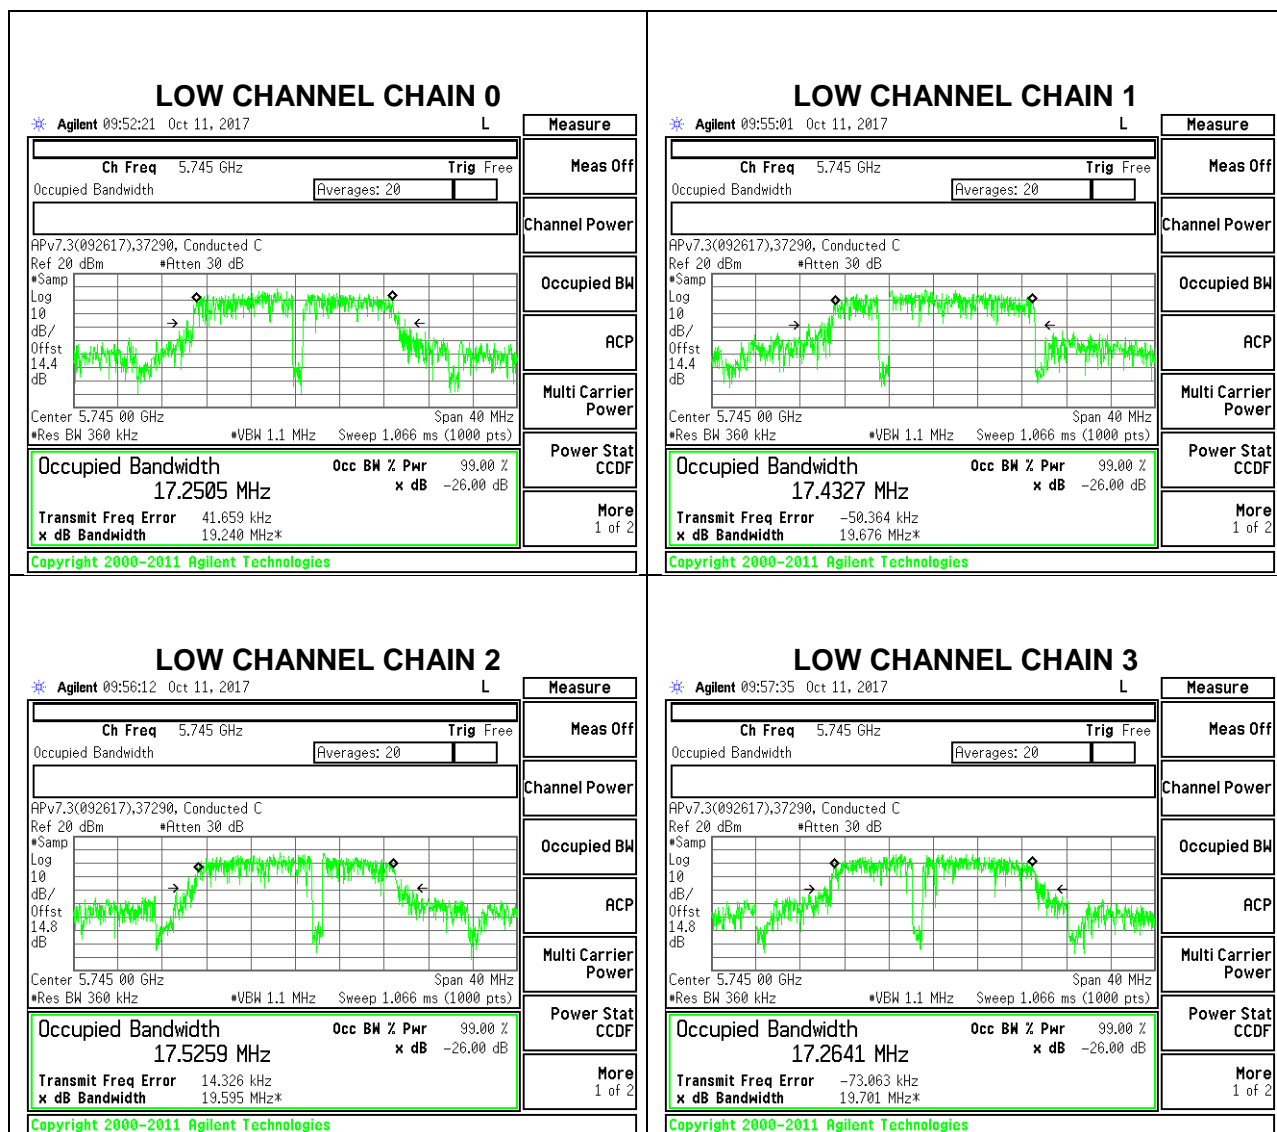

### MID CHANNEL

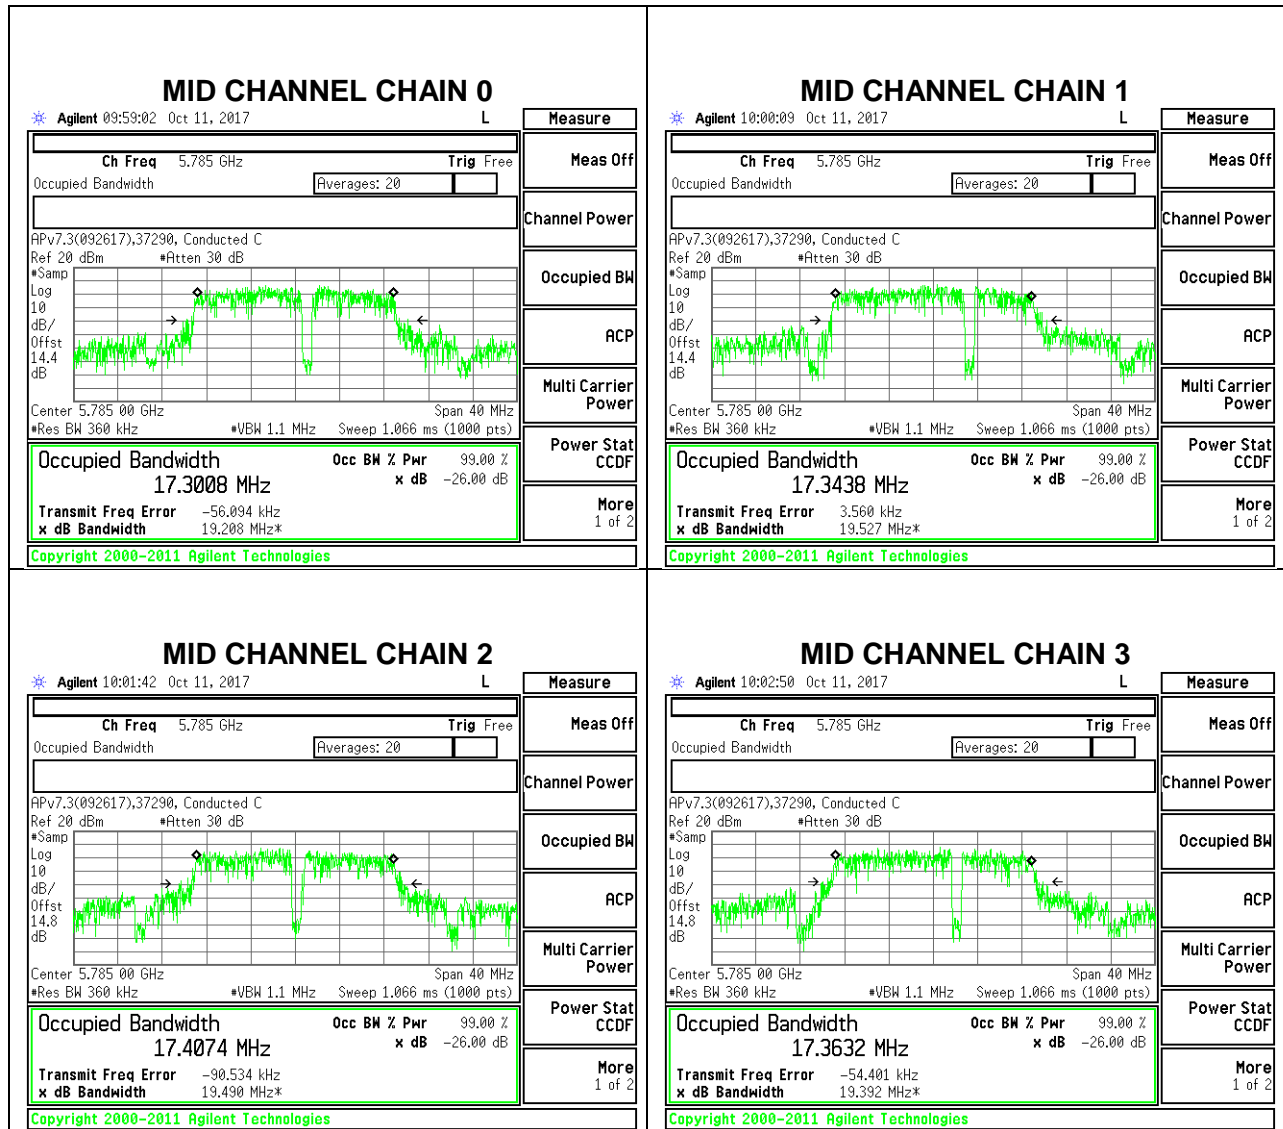

### HIGH CHANNEL

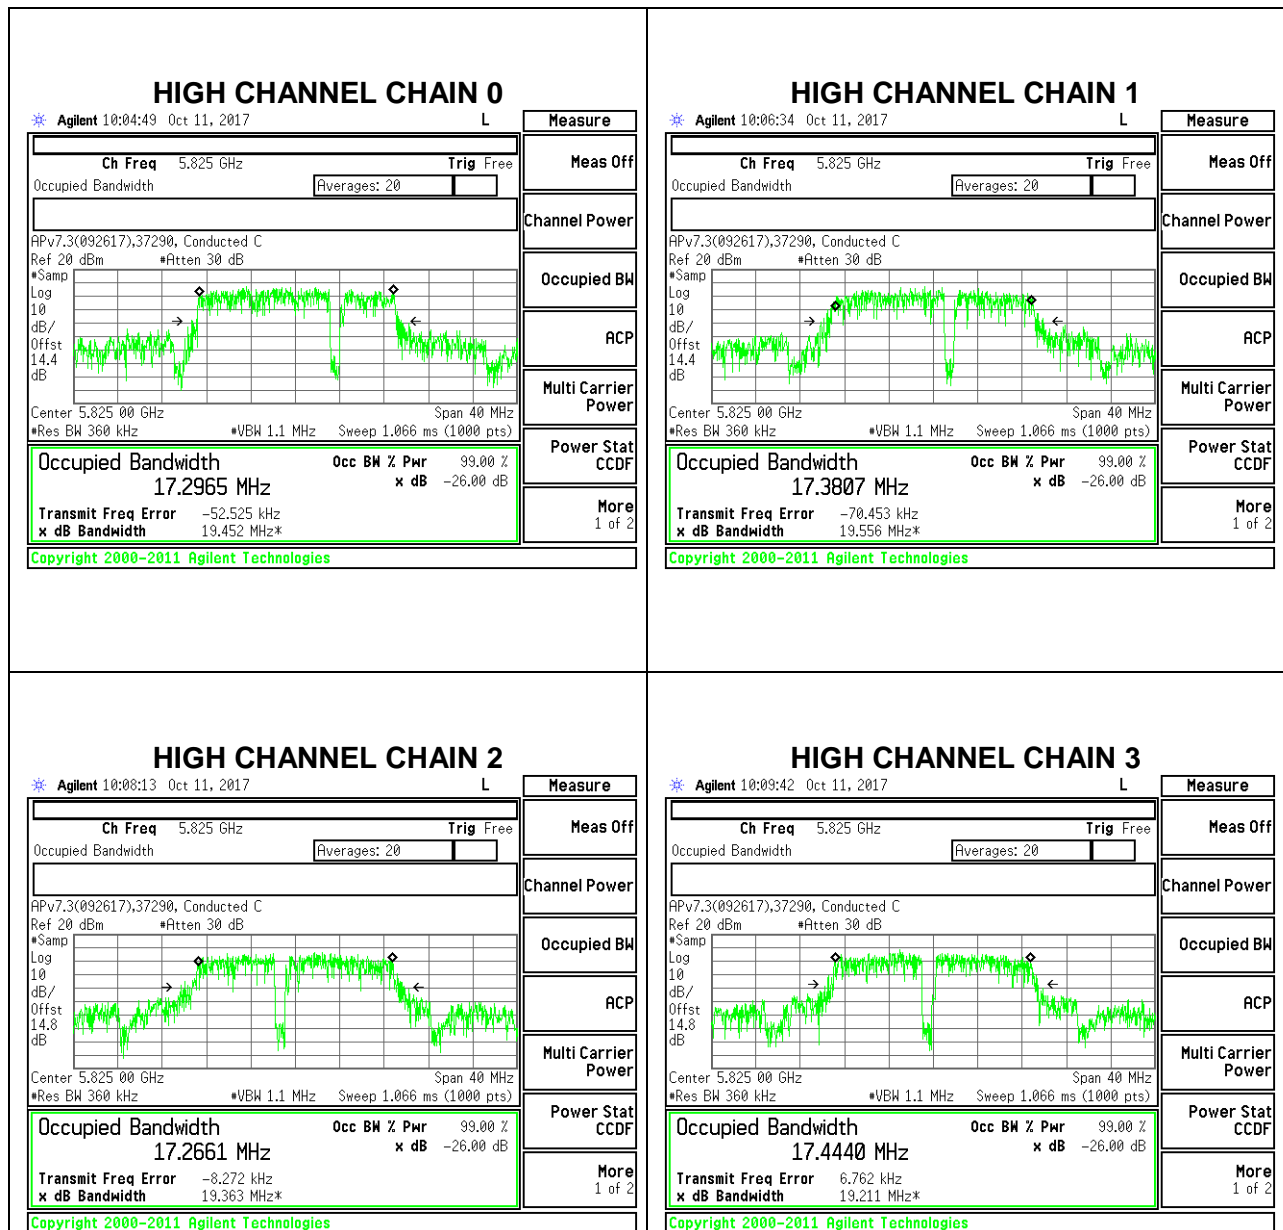

## **6.4. 6 dB BANDWIDTH**

### **LIMITS**

FCC §15.407

IC RSS-247 (6.2.4)

The minimum 6 dB bandwidth shall be at least 500 kHz.


### **RESULTS**

### 6.4.1. 802.11n HT20 MODE IN THE 5.8 GHz BAND


#### 4TX CDD MODE

Channel	Frequency (MHz)	6 dB BW Chain 0 (MHz)	6 dB BW Chain 1 (MHz)	6 dB BW Chain 2 (MHz)	6 dB BW Chain 3 (MHz)	Minimum Limit (MHz)
Low	5745	16.3840	16.5000	16.3290	16.5970	0.5
Mid	5785	16.0790	16.5550	16.3410	<b>16.7500</b>	0.5
High	5825	15.6270	15.1140	16.6520	16.6280	0.5

#### LOW CHANNEL

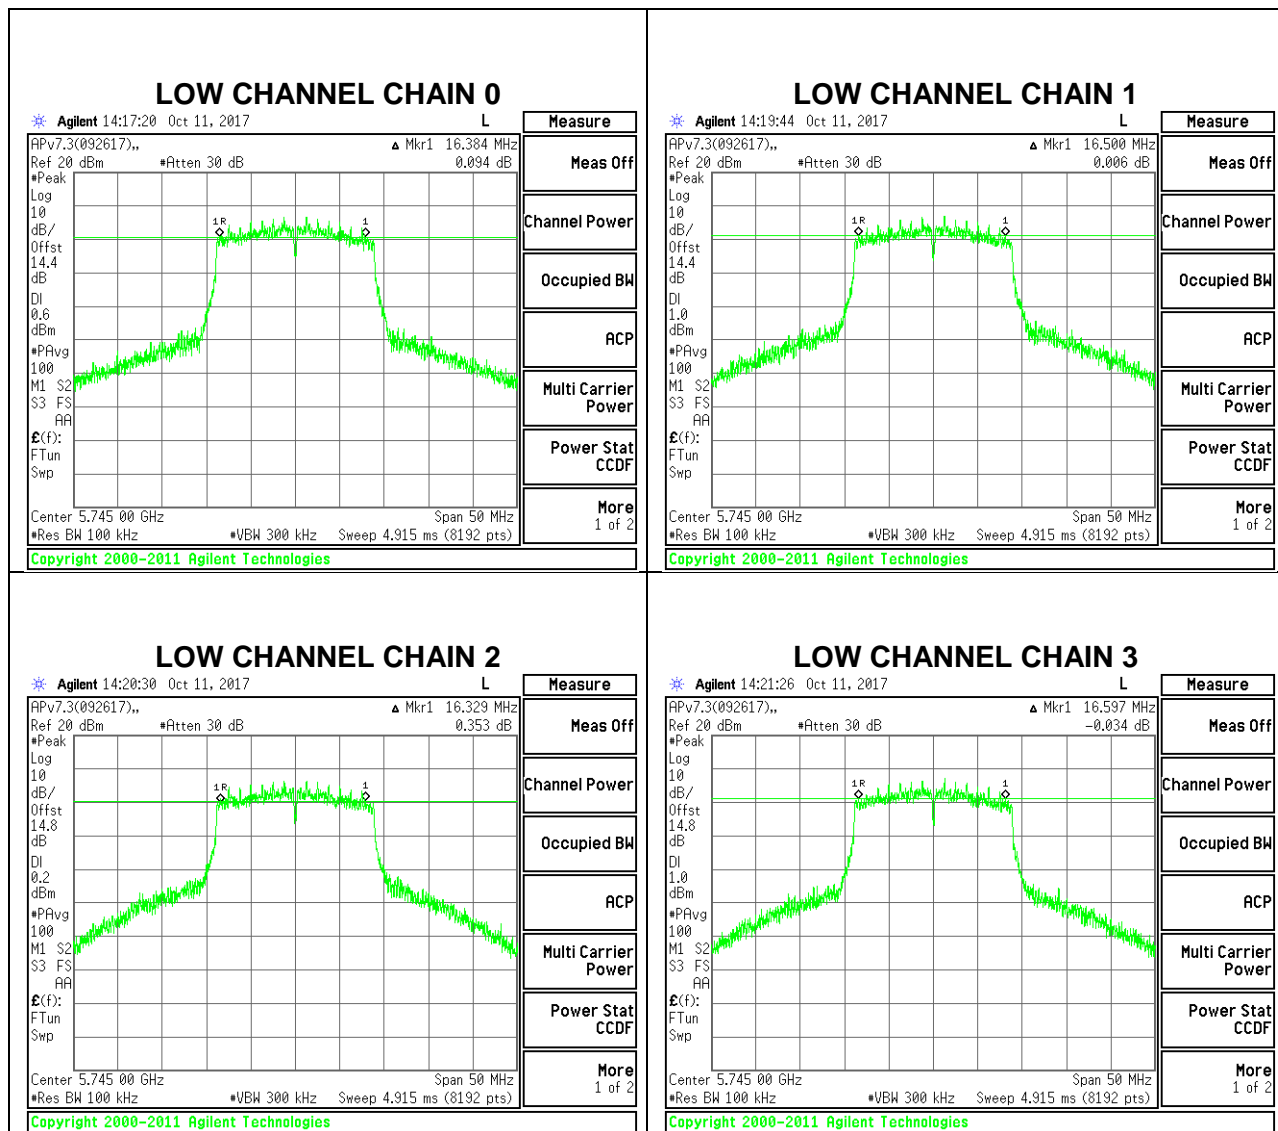


### MID CHANNEL

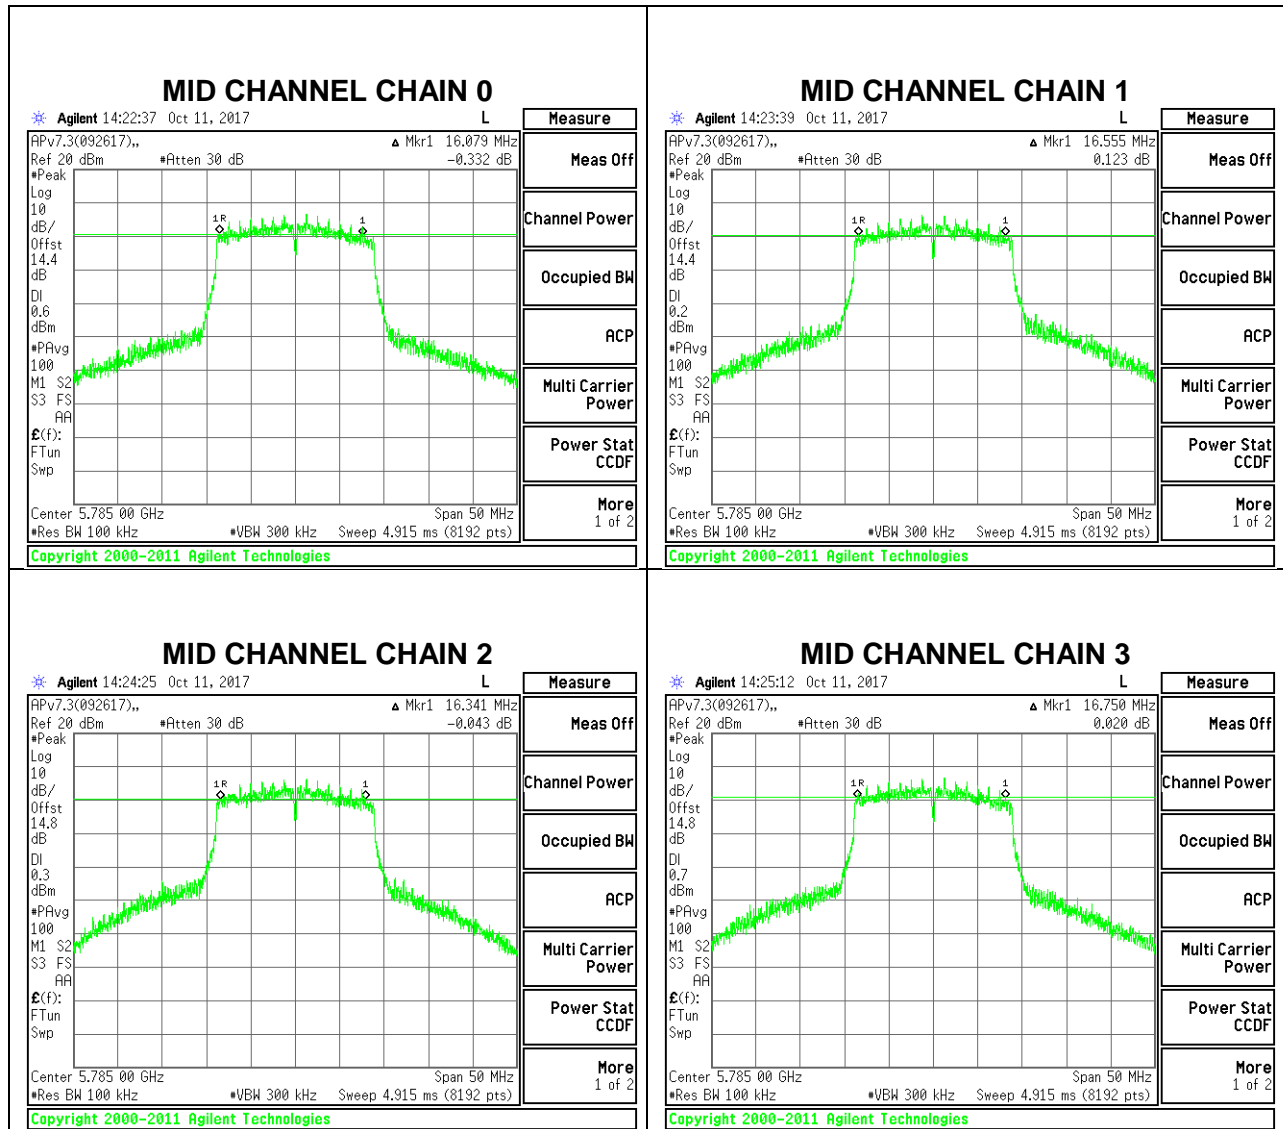



### HIGH CHANNEL

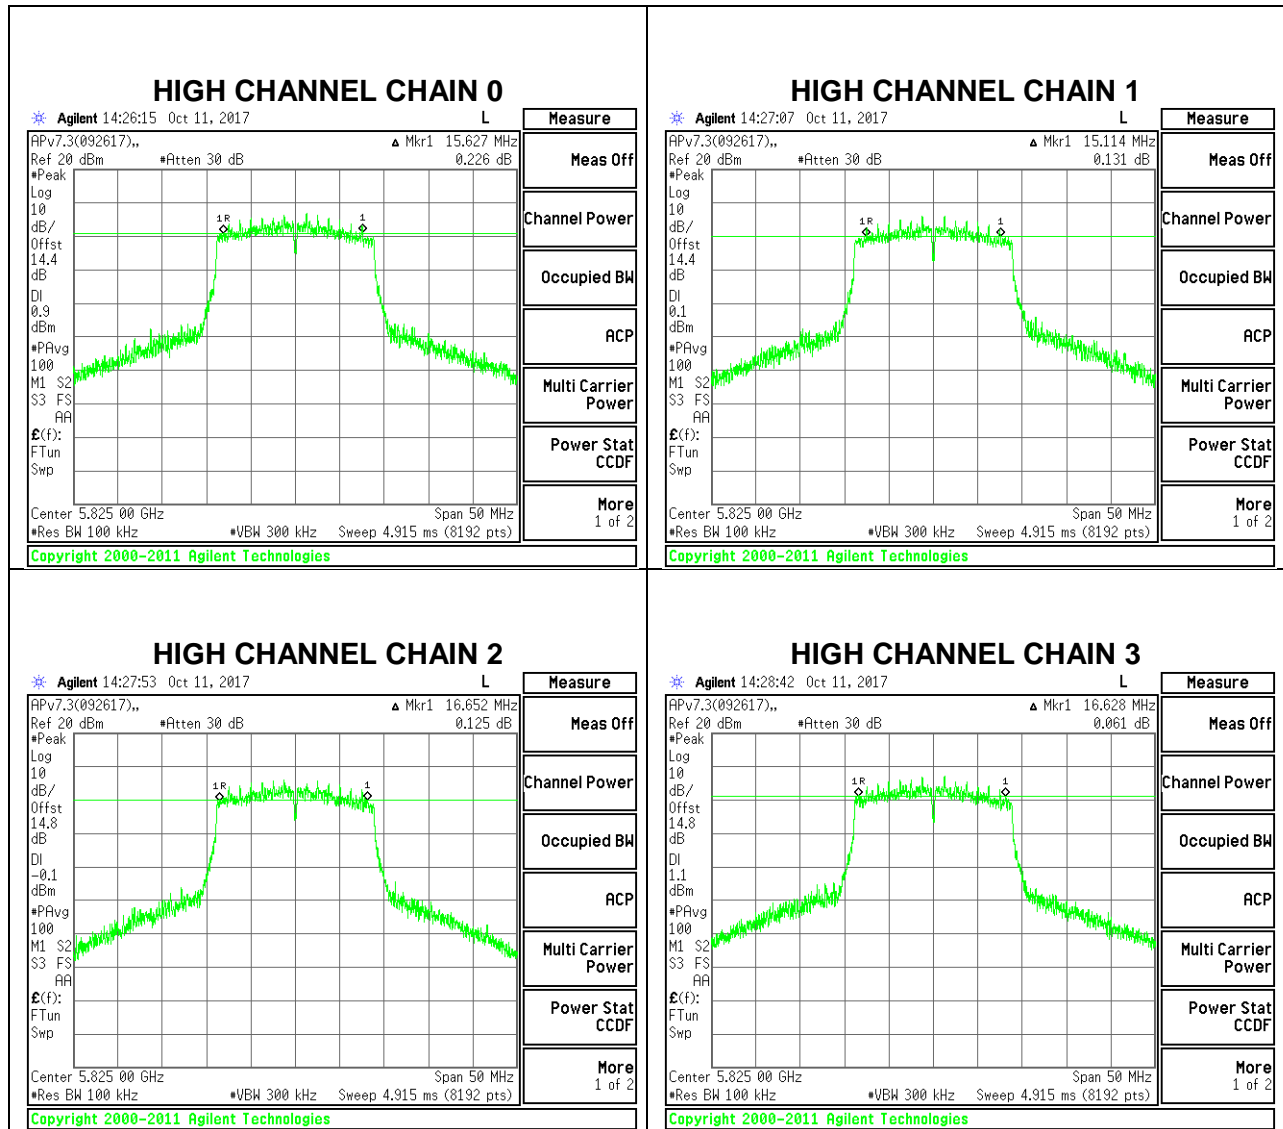

## 6.5. OUTPUT POWER AND PSD

### LIMITS

FCC §15.407 (a) (1)

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Cross-polarized antennas. For a system in which the antennas have fixed orientations relative to one another that ensure that the antennas are cross-polarized regardless of any user actions, the directional gain is computed as follows.

(i) Cross-polarized antennas with  $NANT = 2$ . In the case of a transmitter with only two outputs driving a pair of antennas that are cross-polarized (e.g., vertical and horizontal or left-circular and right-circular), directional gain is the gain of an individual antenna. If the two antennas have different gains, the larger gain applies.

IC RSS-247 6.2.1(1)

The maximum e.i.r.p. shall not exceed 200 mW or  $10 + 10 \log_{10} B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC RSS-247 6.2.2 (1)

The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10} B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10} B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC RSS-247 6.2.3 (1)

The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10} B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10} B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

FCC §15.407 (a) (3), IC RSS-247 6.2.4 (1)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**TEST PROCEDURE**

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

**ANTENNA GAIN**

Tx chains are uncorrelated for power and correlated for PSD due to the device supporting CDD in all MIMO modes. The directional gains are as follows:

Horizontal Polarity (Worst Case)

Band (GHz)	Chain 0 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)	Correlated Chains Directional Gain (dBi)
5.2	4.20	2.38	3.38	6.35
5.3	4.37	2.72	3.62	6.59
5.6	3.57	3.49	3.53	6.54
5.8	1.92	4.05	3.11	6.06

Vertical Polarity

Band (GHz)	Chain 1 Antenna Gain (dBi)	Chain 3 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)	Correlated Chains Directional Gain (dBi)
5.2	4.33	1.67	3.20	6.11
5.3	3.98	2.29	3.22	6.19
5.6	3.4	2.92	3.17	6.17
5.8	2.49	1.97	2.24	5.24

**RESULTS**

**6.5.1. 802.11n HT20 MODE IN THE 5.2 GHz BAND**

**4TX CDD MODE (FCC+IC)**

**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	17.22	3.38	6.35	24.00	10.46
Mid	5200	17.29	3.38	6.35	24.00	10.46
High	5240	17.26	3.38	6.35	24.00	10.46

<b>Duty Cycle CF (dB)</b>	0.33	<b>Included in Calculations of Corr'd Power &amp; PPSD</b>
---------------------------	------	--


**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Chain 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	13.58	13.41	14.04	13.81	<b>20.07</b>	24.00	-3.93
Mid	5200	13.42	13.32	13.95	13.66	19.94	24.00	-4.06
High	5240	13.14	13.33	14.10	13.23	19.82	24.00	-4.18


**PPSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Chain 2 Meas PPSD (dBm)	Chain 3 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5180	3.57	3.51	4.31	3.95	10.20	10.46	-0.26
Mid	5200	3.68	3.52	4.36	3.94	<b>10.24</b>	10.46	-0.22
High	5240	3.57	3.46	4.06	3.75	10.07	10.46	-0.39


### LOW CHANNEL

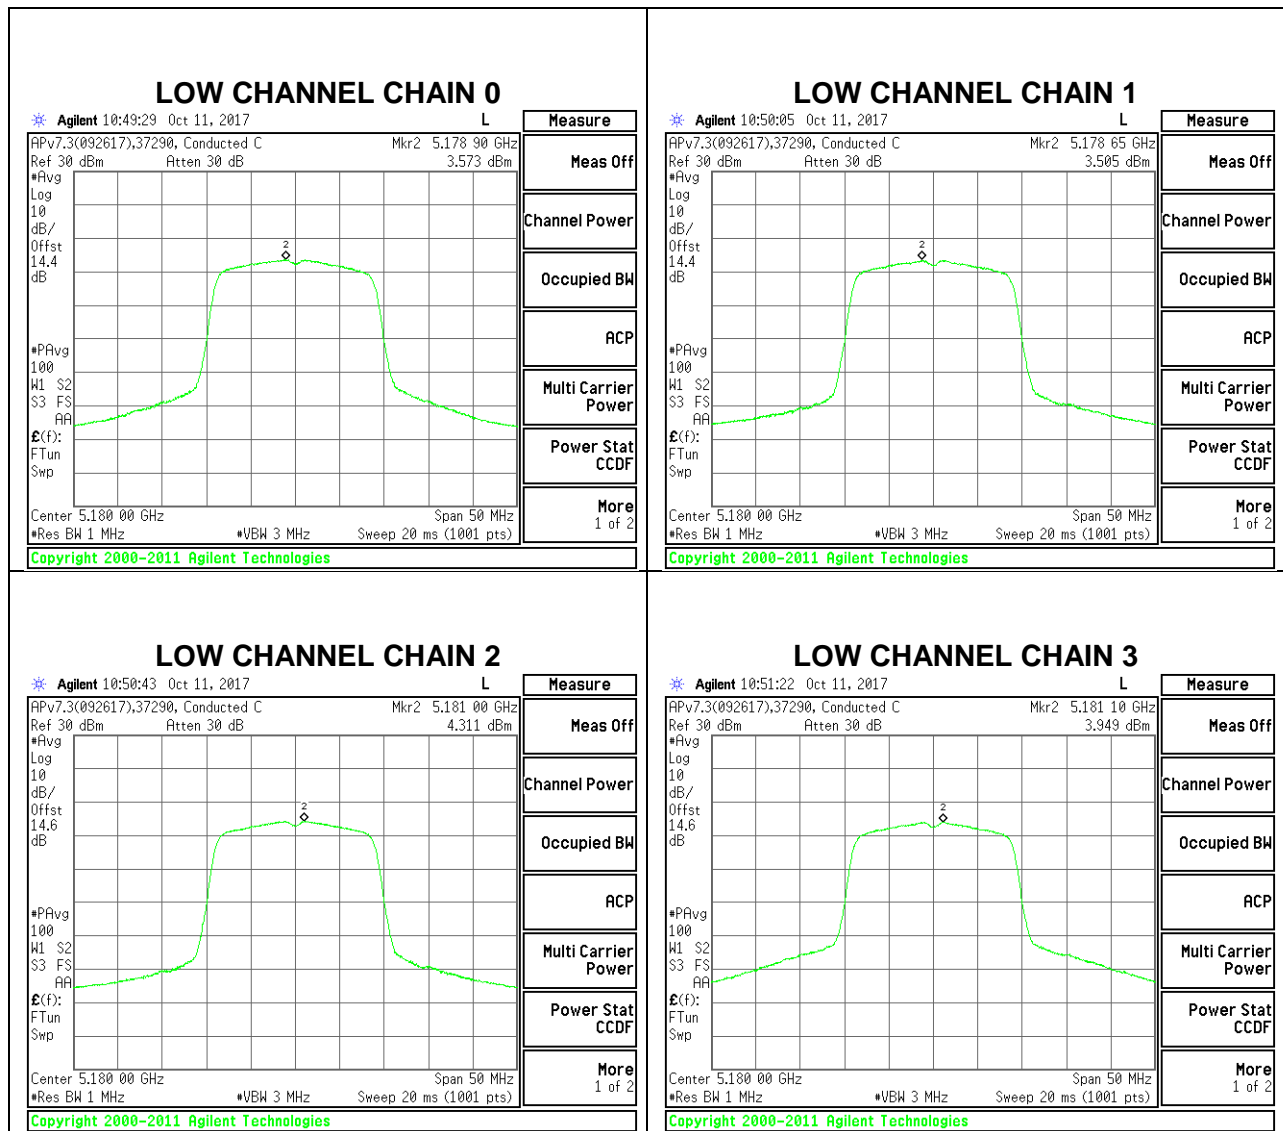

### MID CHANNEL

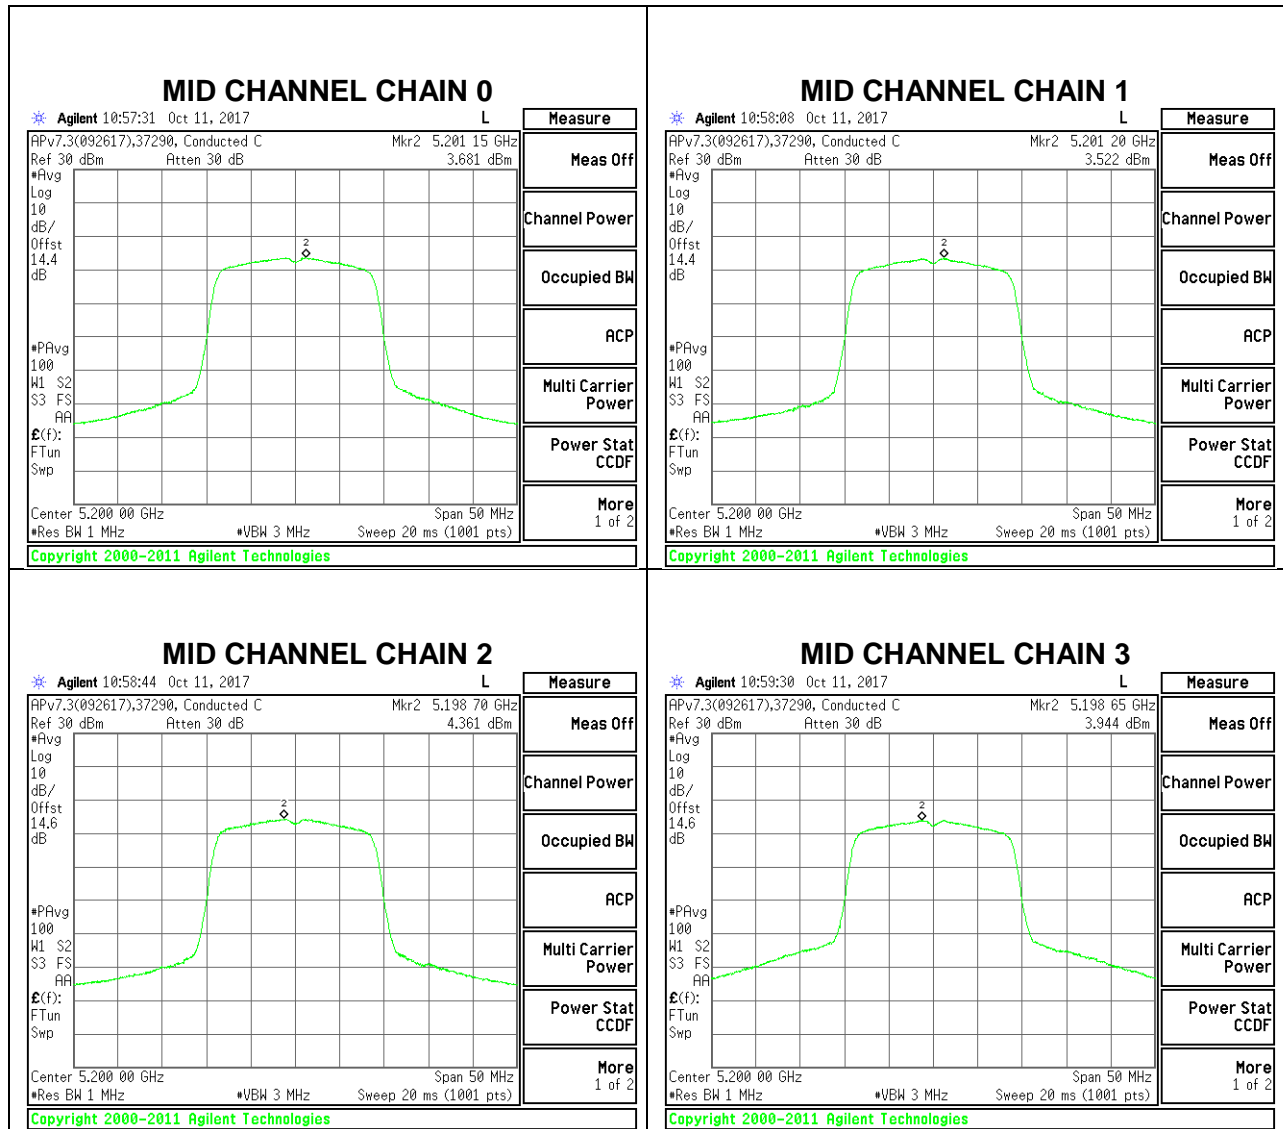

### HIGH CHANNEL

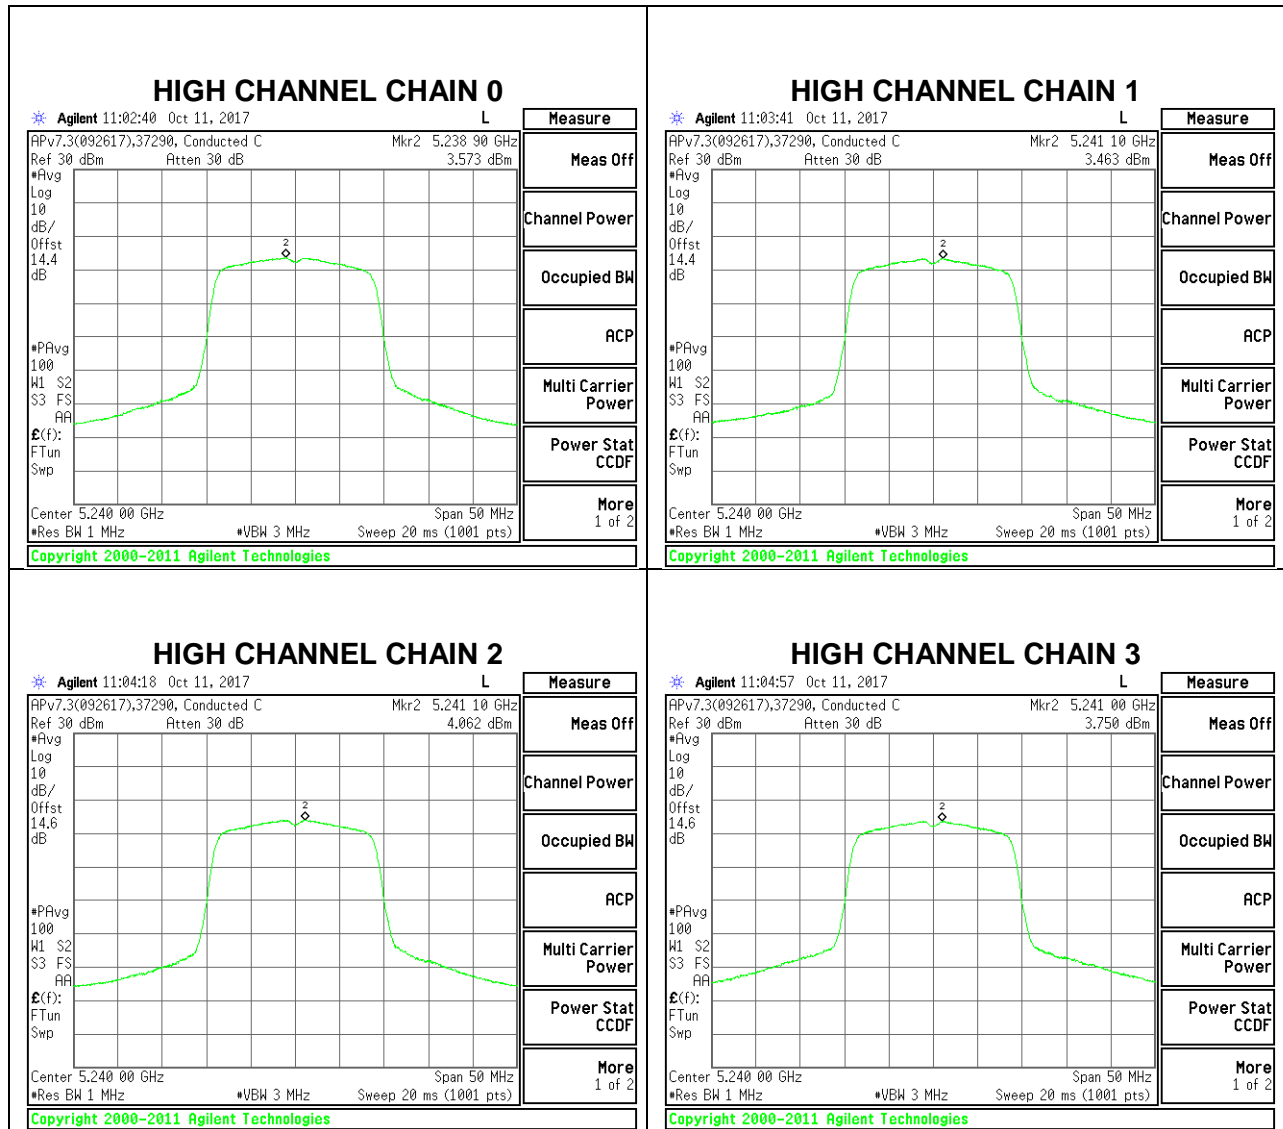



### 6.5.2. 802.11n HT20 MODE IN THE 5.3 GHz BAND

#### 4TX CDD MODE (FCC+IC)

##### Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)	Power Limit (dBm)	PSD Limit (dBi)
Low	5260	20.50	17.15	3.62	6.59	23.34	10.46
Mid	5300	20.55	17.08	3.62	6.59	23.33	10.46
High	5320	20.50	17.20	3.62	6.59	23.36	10.46

Duty Cycle CF (dB)	0.33	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---


##### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Chain 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	13.15	13.41	14.37	13.24	<b>19.92</b>	23.34	-3.42
Mid	5300	12.85	13.11	14.00	13.06	19.63	23.33	-3.70
High	5320	11.12	11.59	11.41	11.02	17.64	23.36	-5.72


##### PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Chain 2 Meas PPSD (dBm)	Chain 3 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5260	3.63	3.39	4.13	3.61	10.05	10.46	-0.41
Mid	5300	3.27	3.58	4.33	3.85	<b>10.13</b>	10.46	-0.33
High	5320	3.27	3.63	4.23	3.94	10.13	10.46	-0.33


### LOW CHANNEL

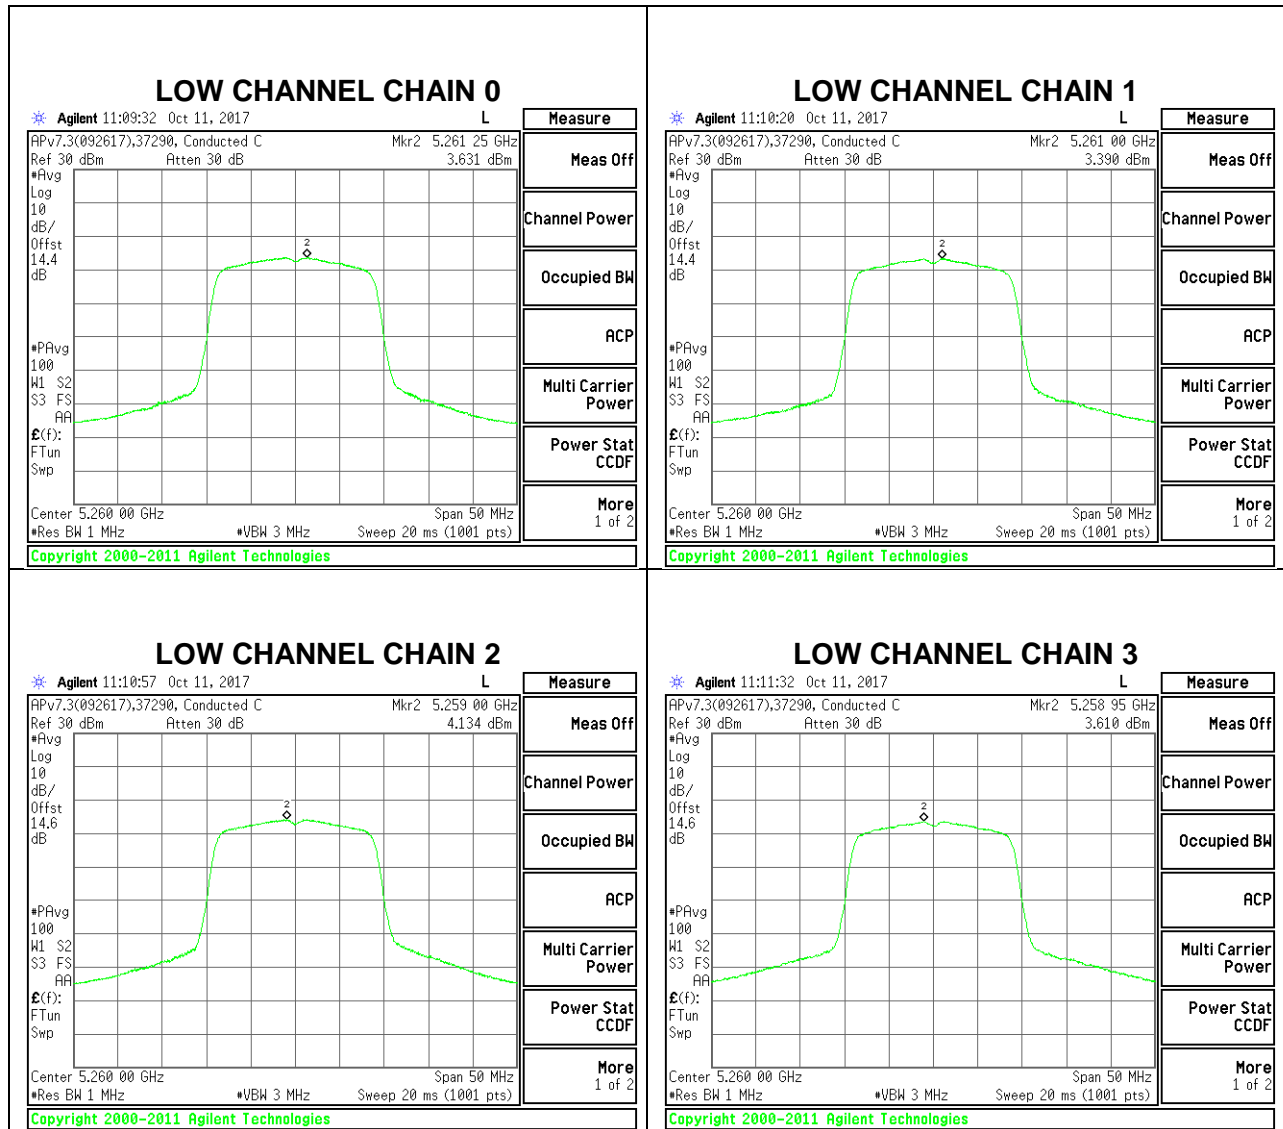

### MID CHANNEL

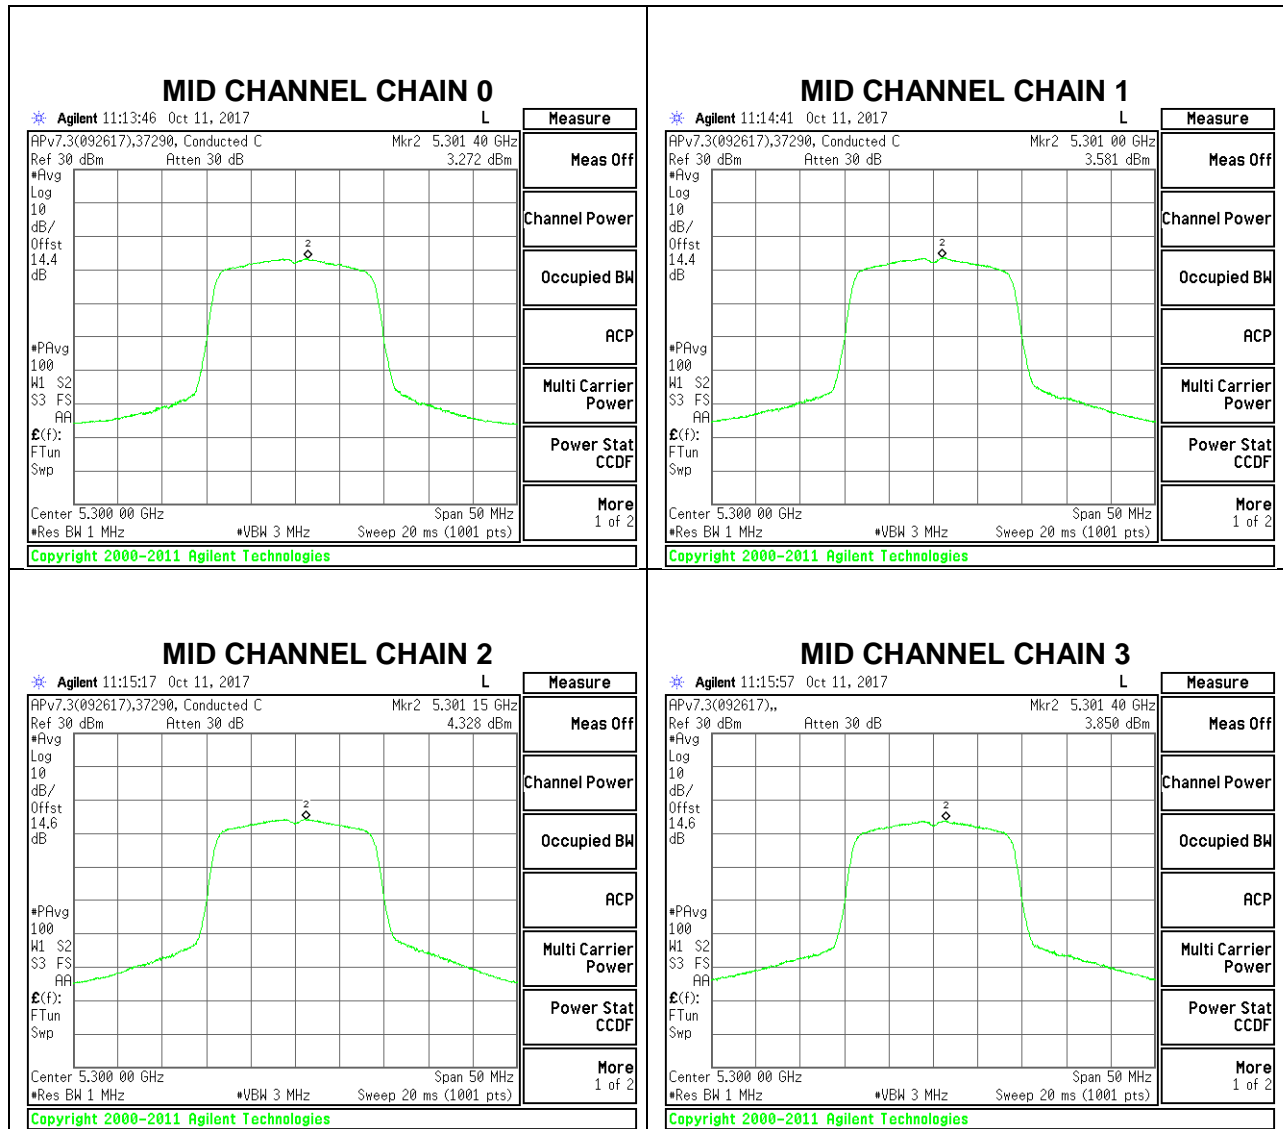

### HIGH CHANNEL

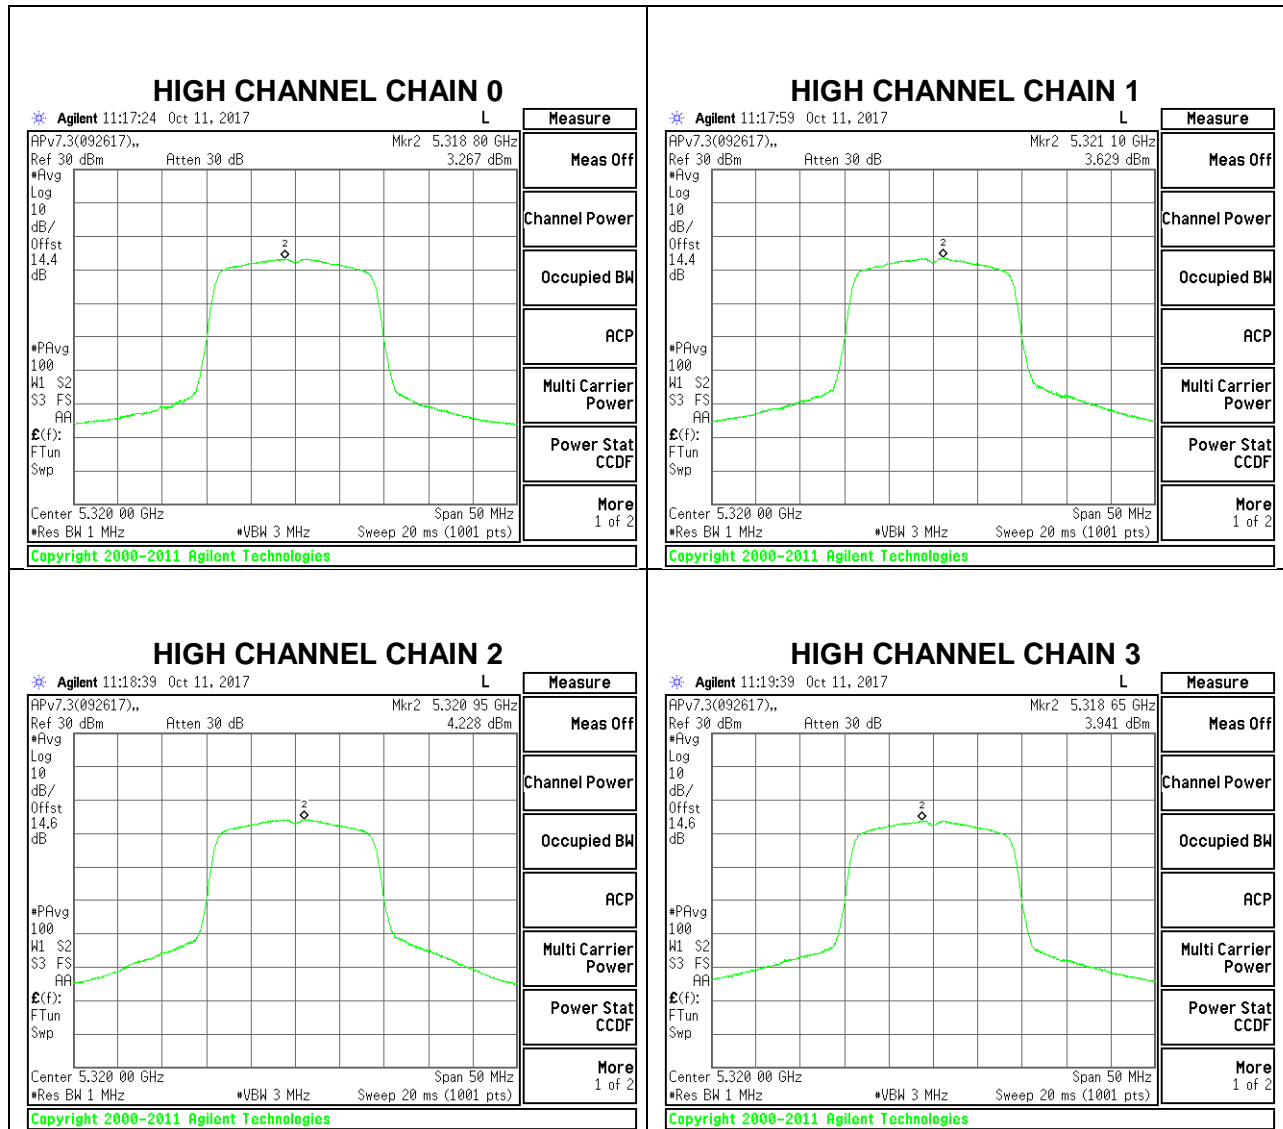

### 6.5.3. 802.11n HT20 MODE IN THE 5.6 GHz BAND

#### 4TX CDD MODE (FCC+IC)

##### Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5500	20.35	17.11	3.53	6.54	23.33	10.46
Mid	5580	20.30	17.20	3.53	6.54	23.35	10.46
High	5700	20.55	17.29	3.53	6.54	23.38	10.46

Duty Cycle CF (dB)	0.33	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


##### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Chain 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	12.94	12.84	13.42	12.83	19.36	23.33	-3.97
Mid	5580	13.45	12.98	13.86	13.22	<b>19.74</b>	23.35	-3.61
High	5700	13.01	12.43	13.08	13.15	19.28	23.38	-4.10


##### PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Chain 3 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5500	3.83	3.54	3.68	3.45	9.97	10.46	-0.49
Mid	5580	3.67	3.41	4.01	4.00	<b>10.13</b>	10.46	-0.33
High	5700	3.04	3.20	3.62	4.29	9.92	10.46	-0.54


### LOW CHANNEL

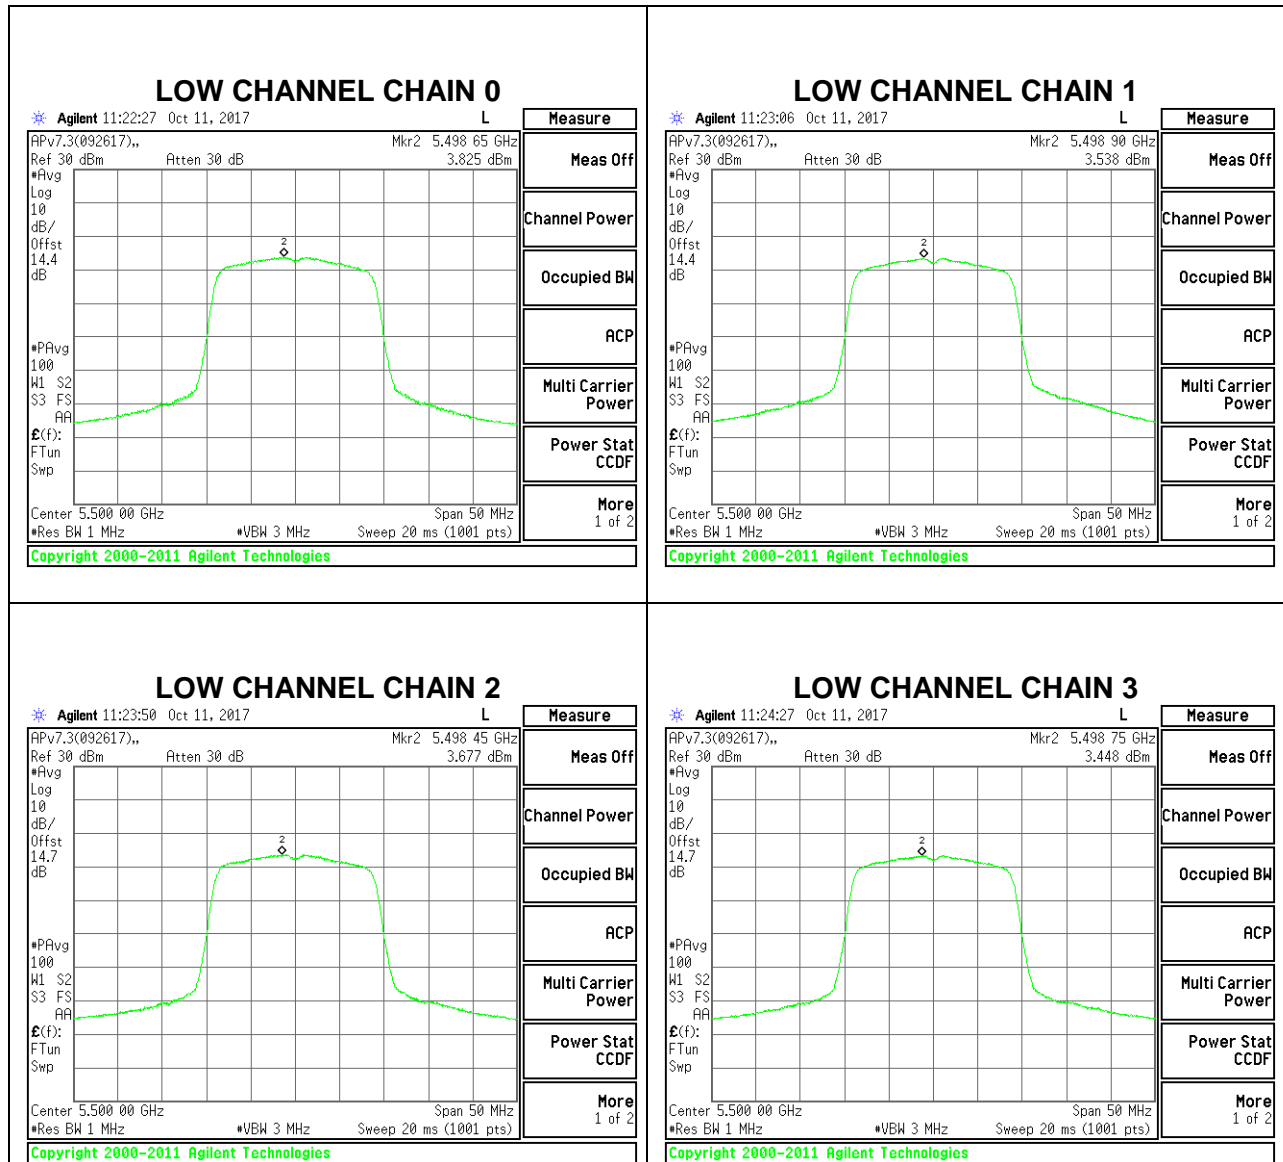

### MID CHANNEL

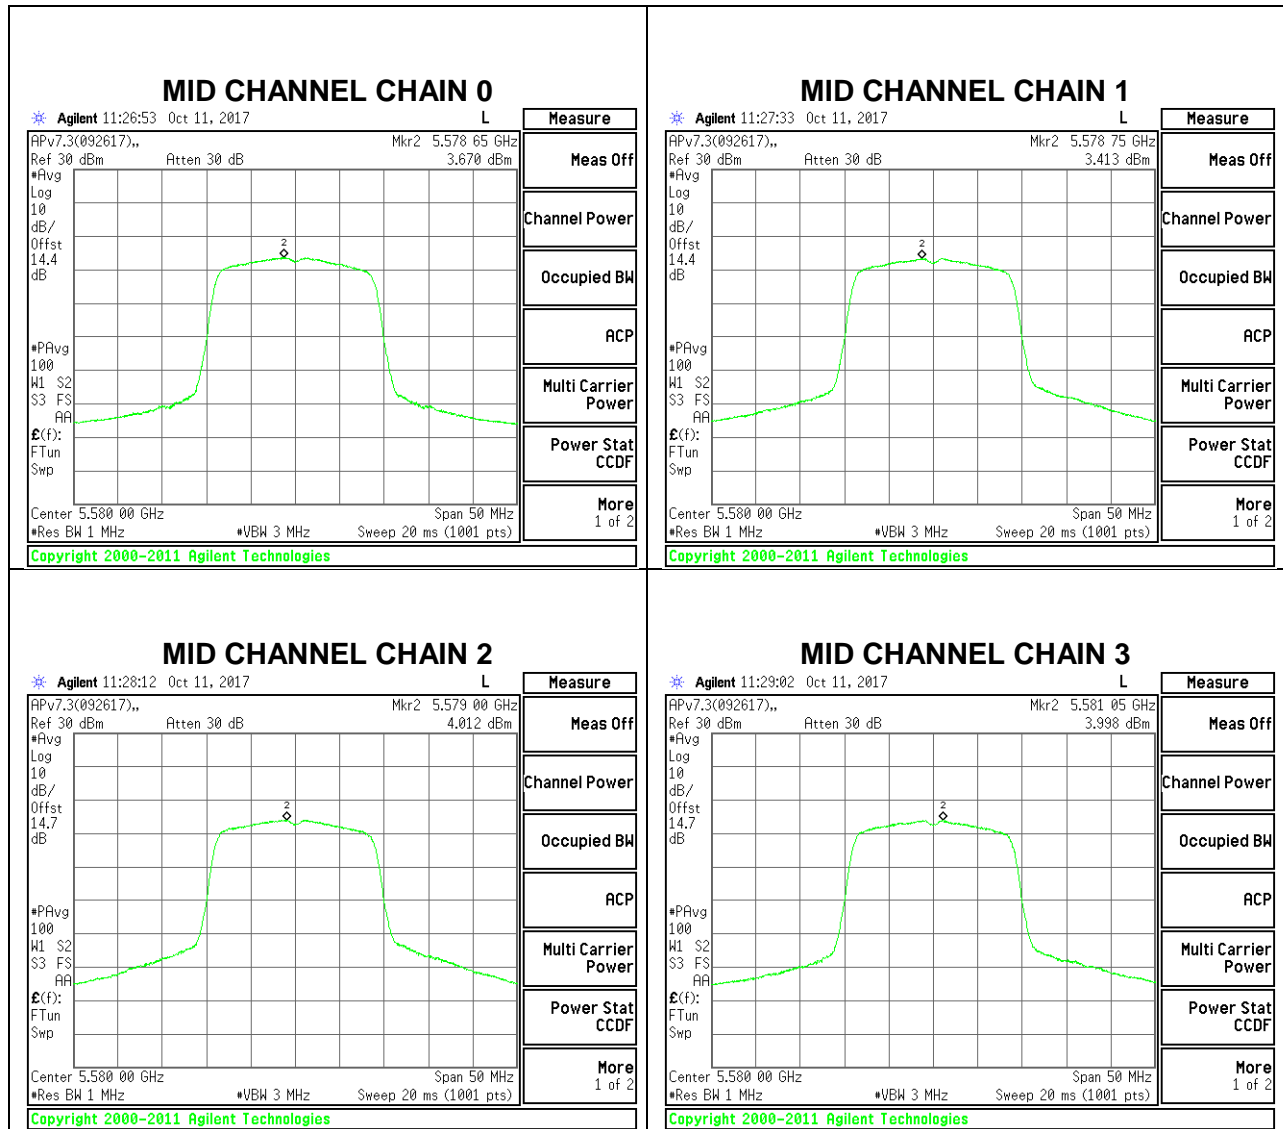

### HIGH CHANNEL

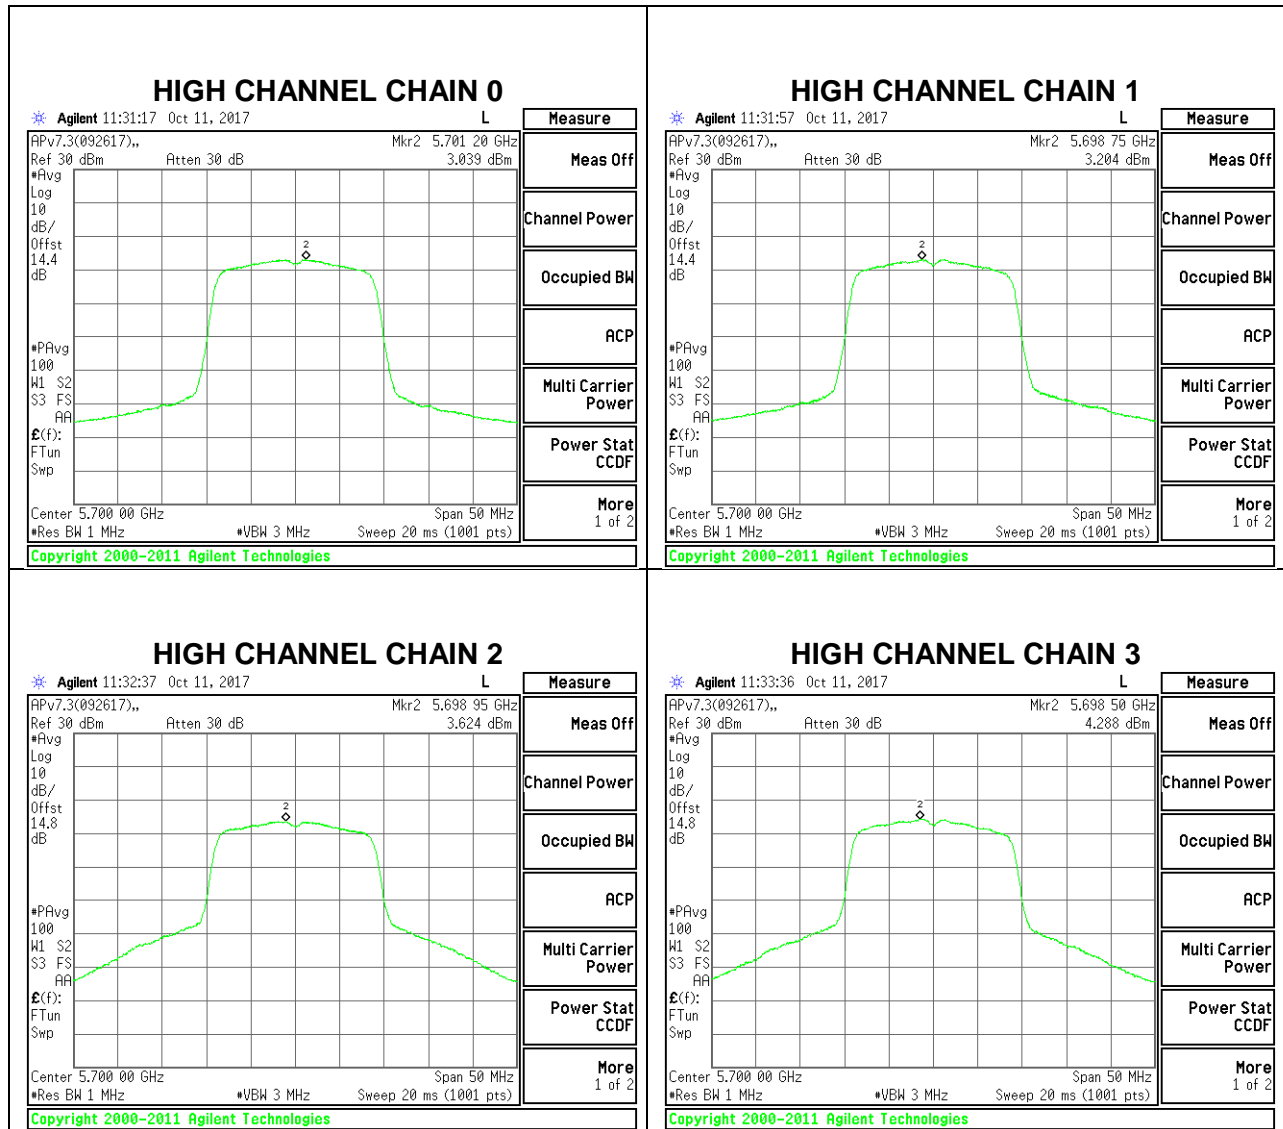



### 6.5.4. 802.11n HT20 MODE IN THE 5.8 GHz BAND

#### 4TX CDD MODE (FCC+IC)

##### Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBm)	FCC/IC Power Limit (dBm)	FCC/IC PSD Limit (dBm)
Low	5745	3.11	6.06	30.00	29.94
Mid	5785	3.11	6.06	30.00	29.94
High	5825	3.11	6.06	30.00	29.94

<b>Duty Cycle CF (dB)</b>	0.33	<b>Included in Calculations of Corr'd Power &amp; PSD</b>
---------------------------	------	---


##### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Chain 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	15.23	15.11	15.34	15.23	20.29	30.00	-9.71
Mid	5785	15.25	15.00	15.14	15.23	20.26	30.00	-9.74
High	5825	15.92	14.44	15.17	15.23	<b>20.34</b>	30.00	-9.66


##### PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Chain 3 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5745	3.48	3.71	3.25	3.69	<b>8.73</b>	29.94	-21.21
Mid	5785	3.09	3.05	2.80	3.24	8.23	29.94	-21.71
High	5825	3.42	2.73	2.86	3.70	8.40	29.94	-21.54


### LOW CHANNEL

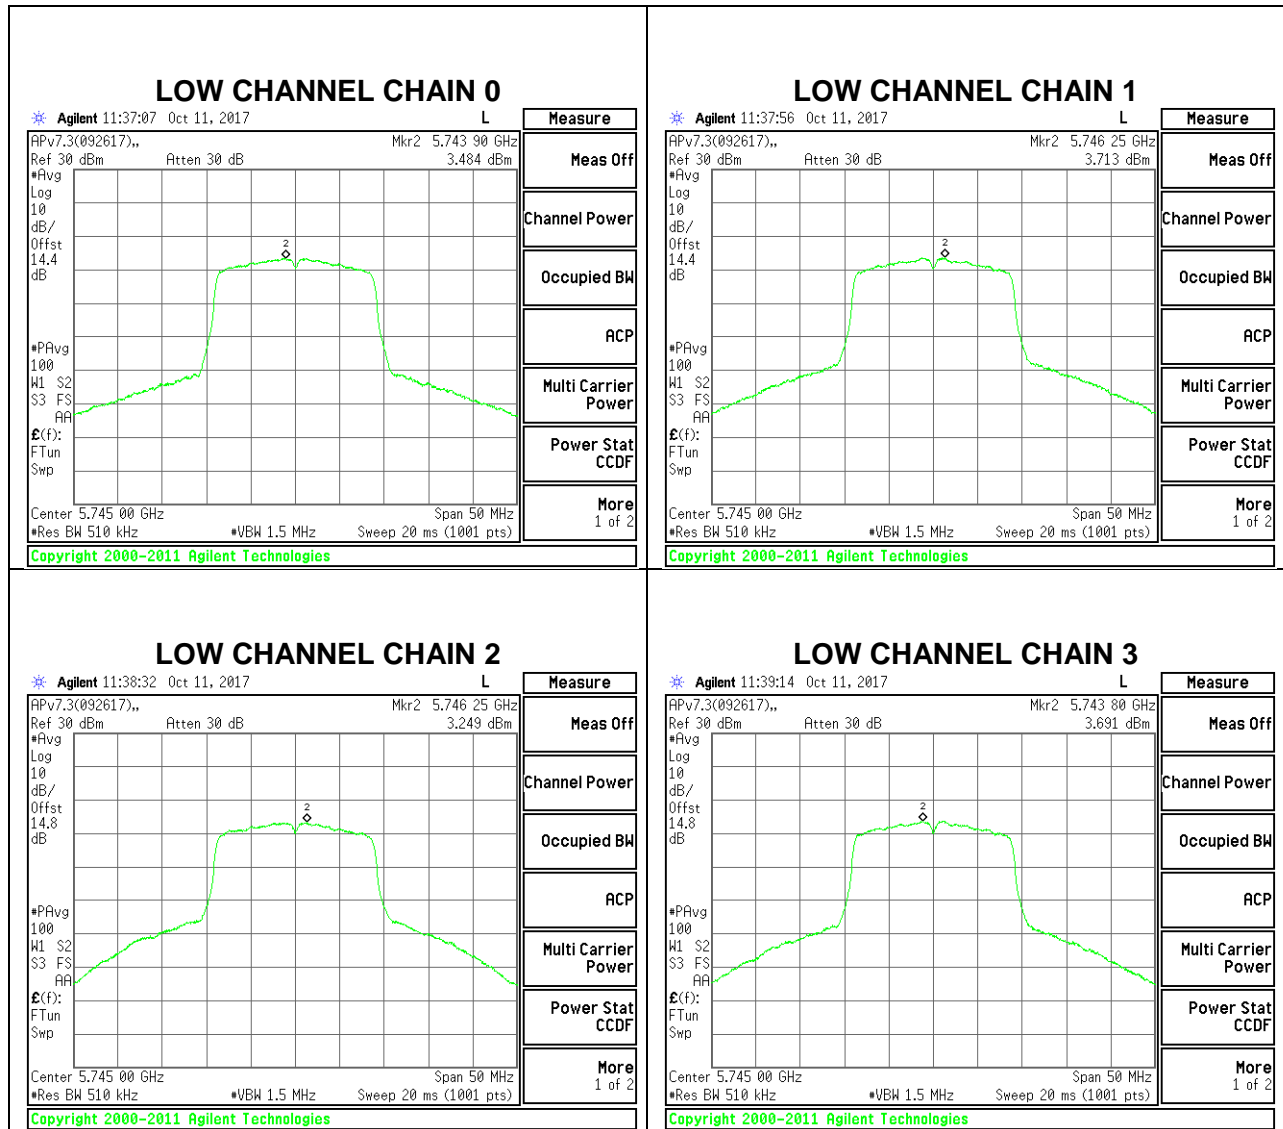

### MID CHANNEL

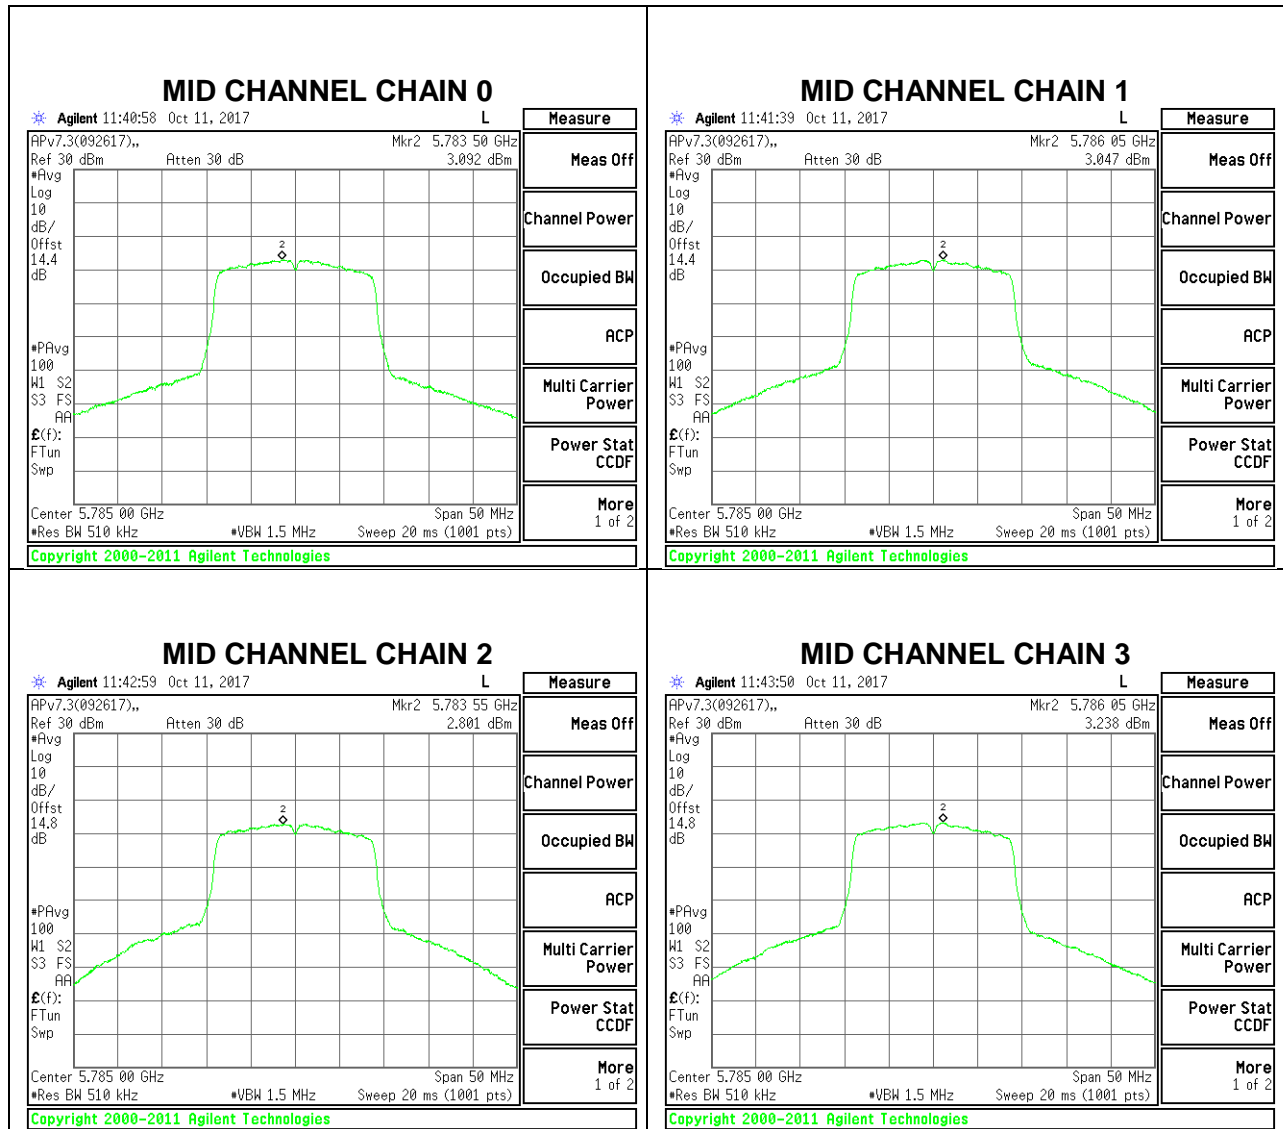

### HIGH CHANNEL

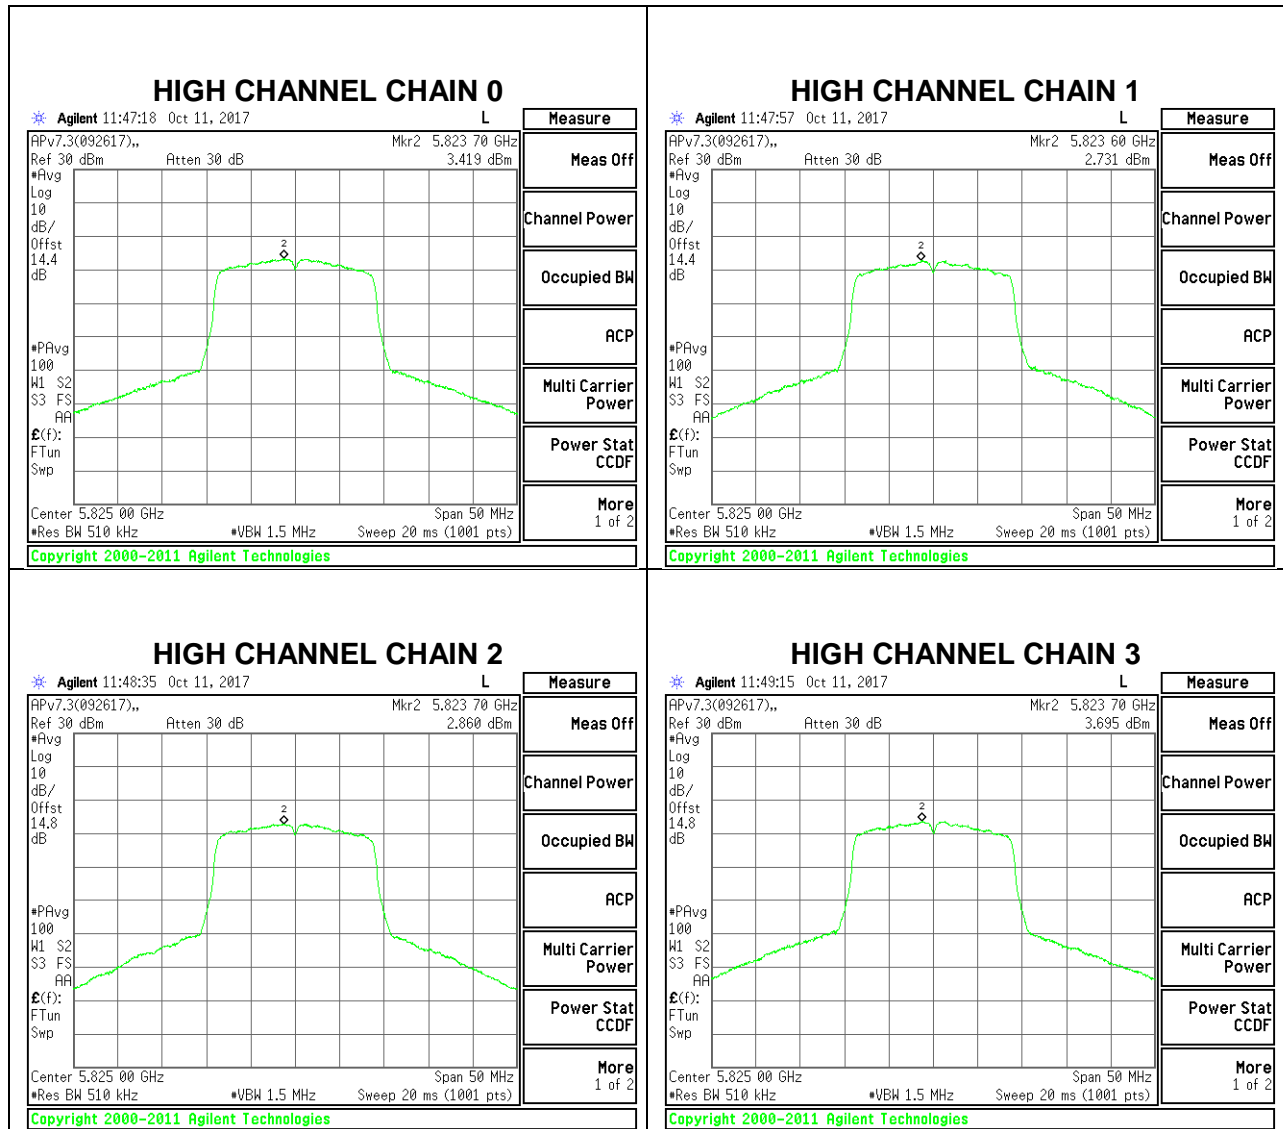

## 7. RADIATED TEST RESULTS

### LIMITS

FCC §15.205 and §15.209

RSS-GEN, Section 8.9 and 8.10.

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
0.009-0.490	2400/F(kHz) @ 300 m	-
0.490-1.705	2400/F(kHz) @ 30 m	-
1.705-30	30 @ 30m	-
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

The spectrum from 1GHz to 18GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band. Below 1GHz and above 18GHz emissions, the channel with the highest output power was tested.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Radiated emissions were performed with the EUT set to transmit at the channel with the highest output power as worst-case scenario.


## 7.1. TRANSMITTER ABOVE 1 GHz

### 7.1.1. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.2 GHz BAND

#### 4TX CDD MODE

#### BANDEDGE (LOW CHANNEL)

#### HORIZONTAL RESULT

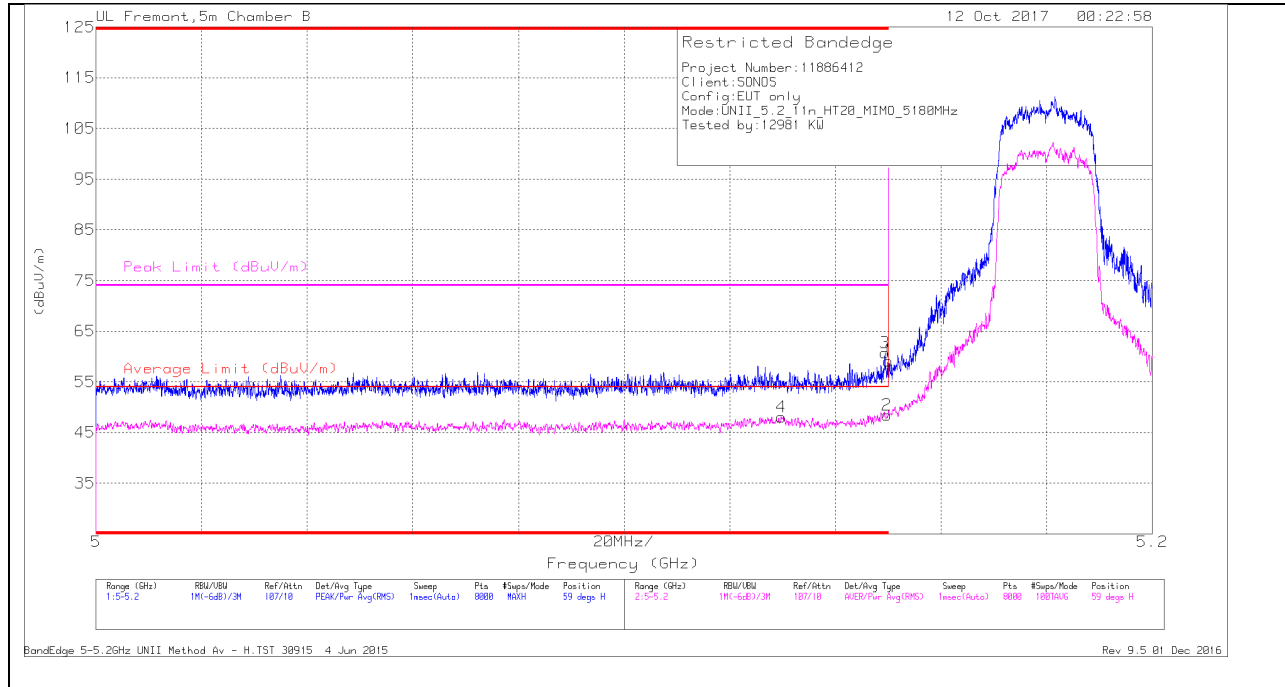


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cb/Filtz/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	44.77	Pk	34.4	-20	0	59.17	-	-	74	-14.83	59	335	H
3	* 5.149	46.3	Pk	34.4	-20	0	60.7	-	-	74	-13.3	59	335	H
2	* 5.15	33.43	RMS	34.4	-20	.56	48.39	54	-5.61	-	-	59	335	H
4	* 5.13	32.4	RMS	34.4	-19.3	.56	48.06	54	-5.94	-	-	59	335	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT


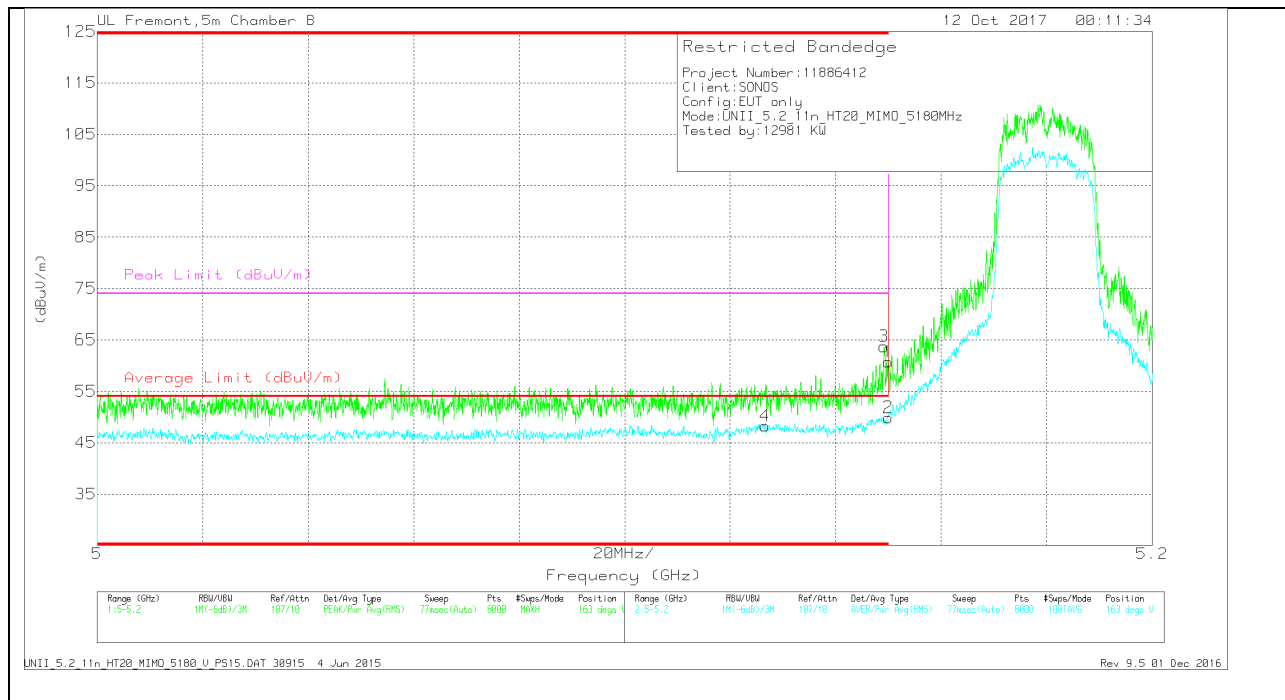


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	46.32	Pk	34.4	-20	0	60.72	-	-	74	-13.28	163	278	V
3	* 5.149	49.31	Pk	34.4	-20	0	63.71	-	-	74	-10.29	163	278	V
2	* 5.15	35.47	RMS	34.4	-20	.56	50.43	54	-3.57	-	-	163	278	V
4	* 5.127	32.95	RMS	34.4	-19.1	.56	48.81	54	-5.19	-	-	163	278	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

# HARMONICS AND SPURIOUS EMISSIONS

## LOW CHANNEL RESULTS

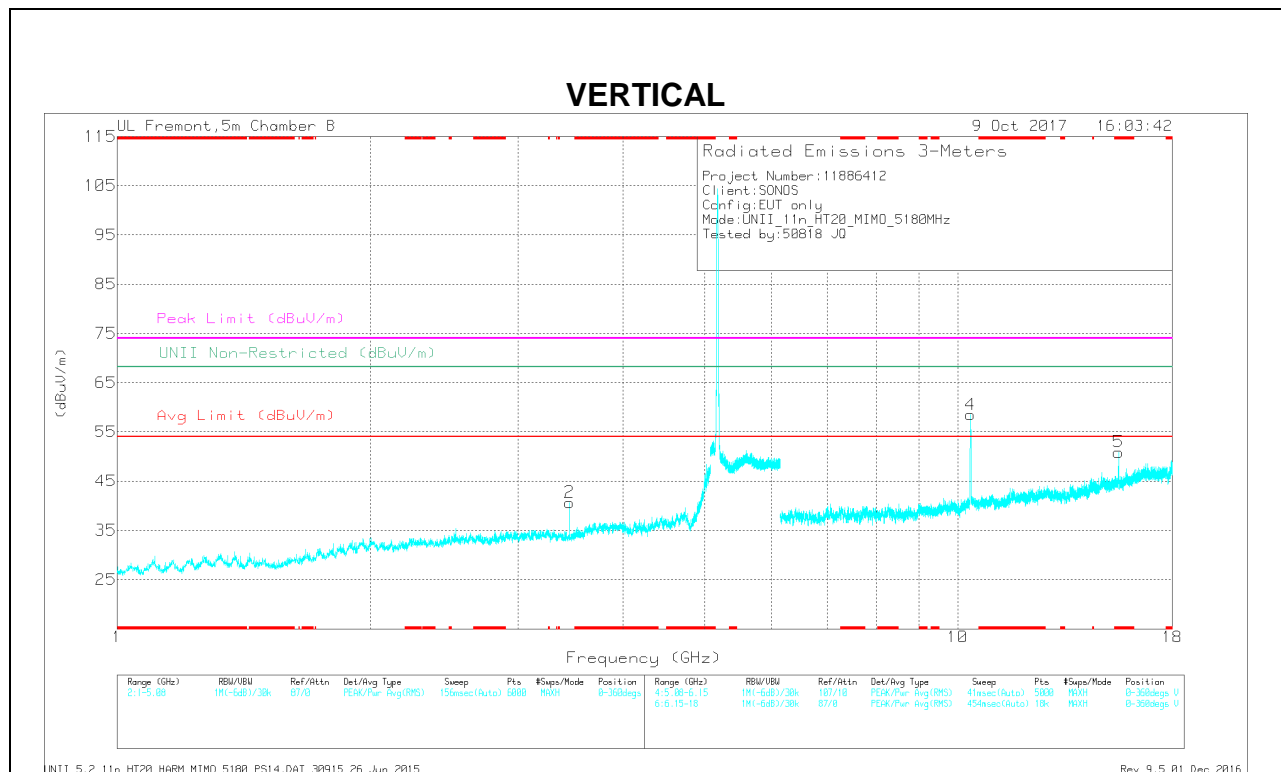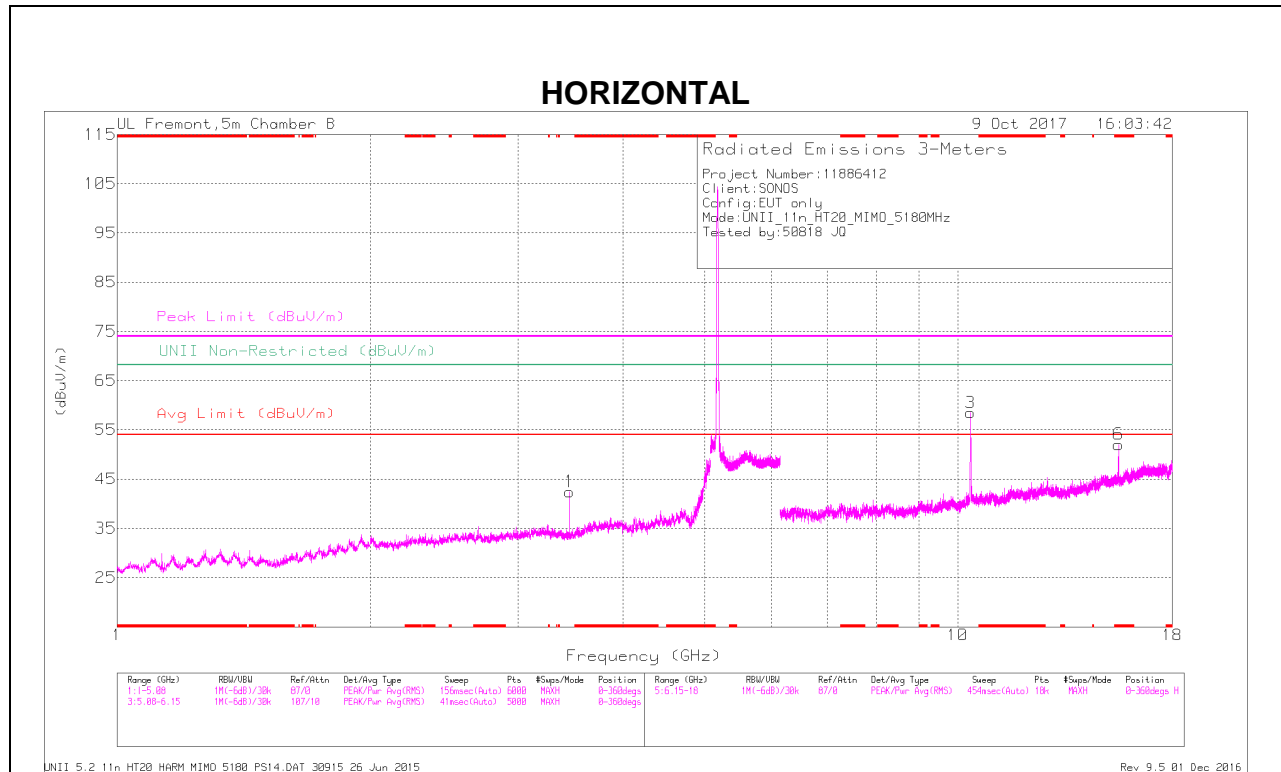





**RADIATED EMISSIONS**

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Chf/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 15.534	37.38	PK-U	40.6	-20.6	0	57.38	-	-	74	-16.62	-	-	96	234	H
* 15.535	22.08	ADR	40.6	-20.6	.56	42.54	54	-11.36	-	-	-	-	96	234	H
* 15.54	41.23	PK-U	40.6	-20.6	0	61.23	-	-	74	-12.77	-	-	105	197	V
* 15.54	23.13	ADR	40.6	-20.6	.56	43.69	54	-10.31	-	-	-	-	105	197	V
3.453	46.44	PK-U	32.6	-31.6	0	47.44	-	-	-	-	68.2	-20.76	58	227	H
3.453	43.5	PK-U	32.6	-31.6	0	44.5	-	-	-	-	68.2	-23.7	245	109	V
10.36	52.84	PK-U	37.5	-22.6	0	67.74	-	-	-	-	68.2	-.46	187	198	V
10.361	52.35	PK-U	37.5	-22.6	0	67.25	-	-	-	-	68.2	-.95	60	367	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK-U - U-NII: Maximum Peak  
 ADR - U-NII AD primary method, RMS average

### MID CHANNEL RESULTS

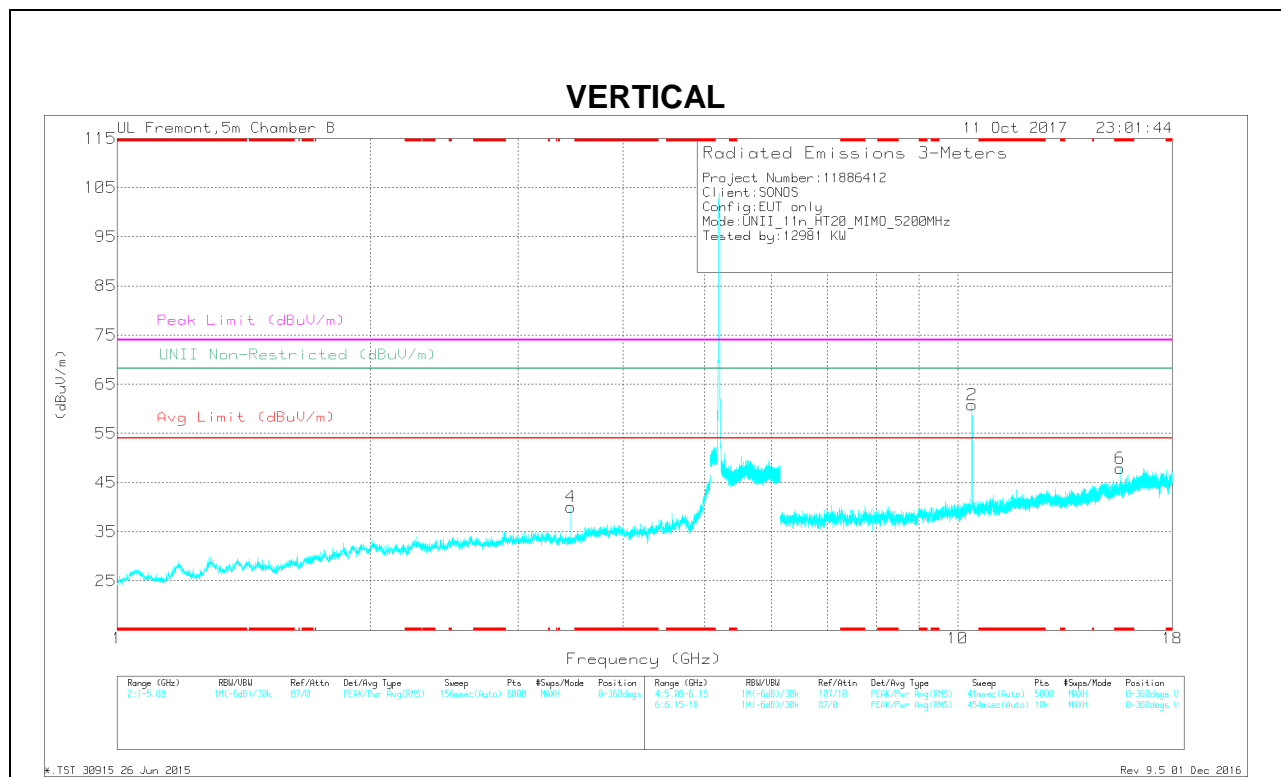
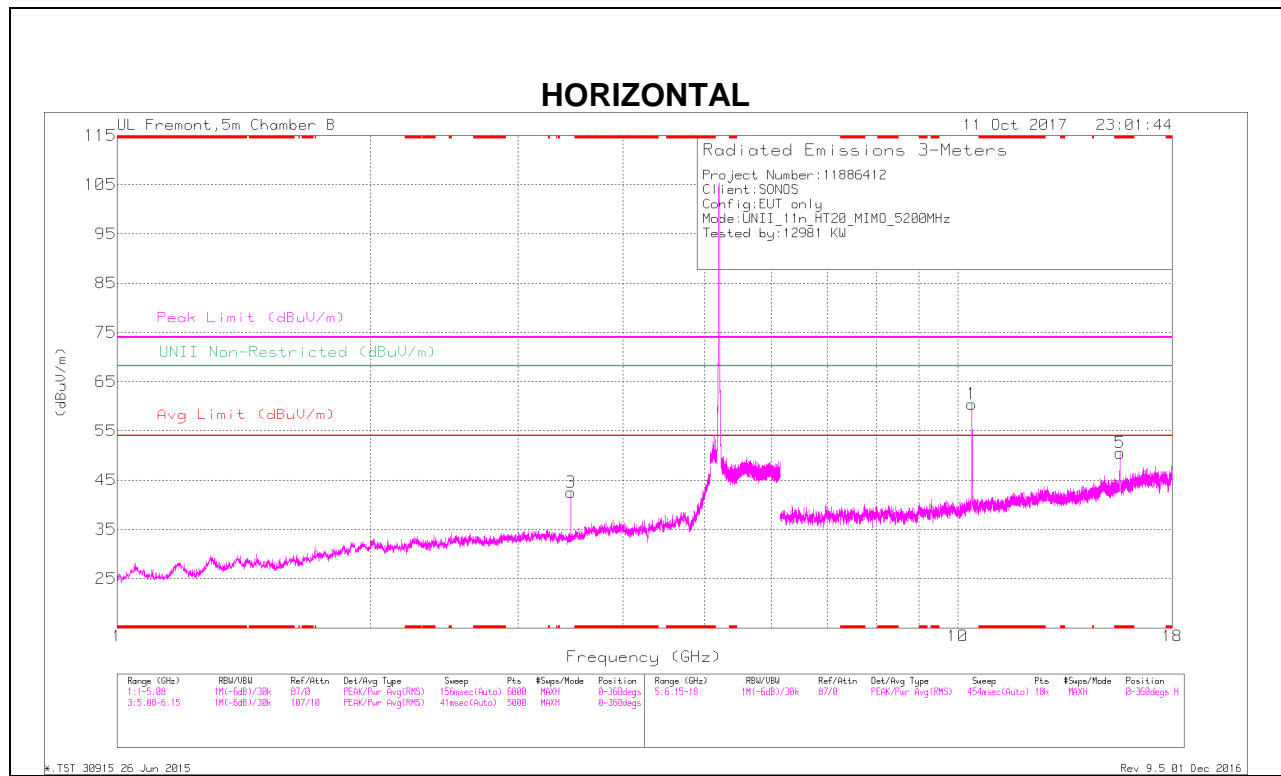


**RADIATED EMISSIONS**

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Chf/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 15.599	34.68	PK-U	40.6	-20.7	0	54.58	-	-	74	-19.42	-	-	79	260	H
* 15.599	21.83	ADR	40.6	-20.7	.56	42.29	54	-11.71	-	-	-	-	79	260	H
** 15.6	36.52	PK-U	40.6	-20.7	0	56.42	-	-	74	-17.58	-	-	50	116	V
* 15.599	23.57	ADR	40.6	-20.7	.56	44.03	54	-9.97	-	-	-	-	50	116	V
3.467	45.75	PK-U	32.7	-31.5	0	46.95	-	-	-	-	68.2	-21.25	56	229	H
3.467	43.49	PK-U	32.7	-31.5	0	44.69	-	-	-	-	68.2	-23.51	147	207	V
10.4	50.14	PK-U	37.5	-22.5	0	65.14	-	-	-	-	68.2	-3.06	50	120	H
10.4	52.67	PK-U	37.5	-22.5	0	67.67	-	-	-	-	68.2	-.53	195	182	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK-U - U-NII: Maximum Peak  
 ADR - U-NII AD primary method, RMS average

### HIGH CHANNEL RESULTS

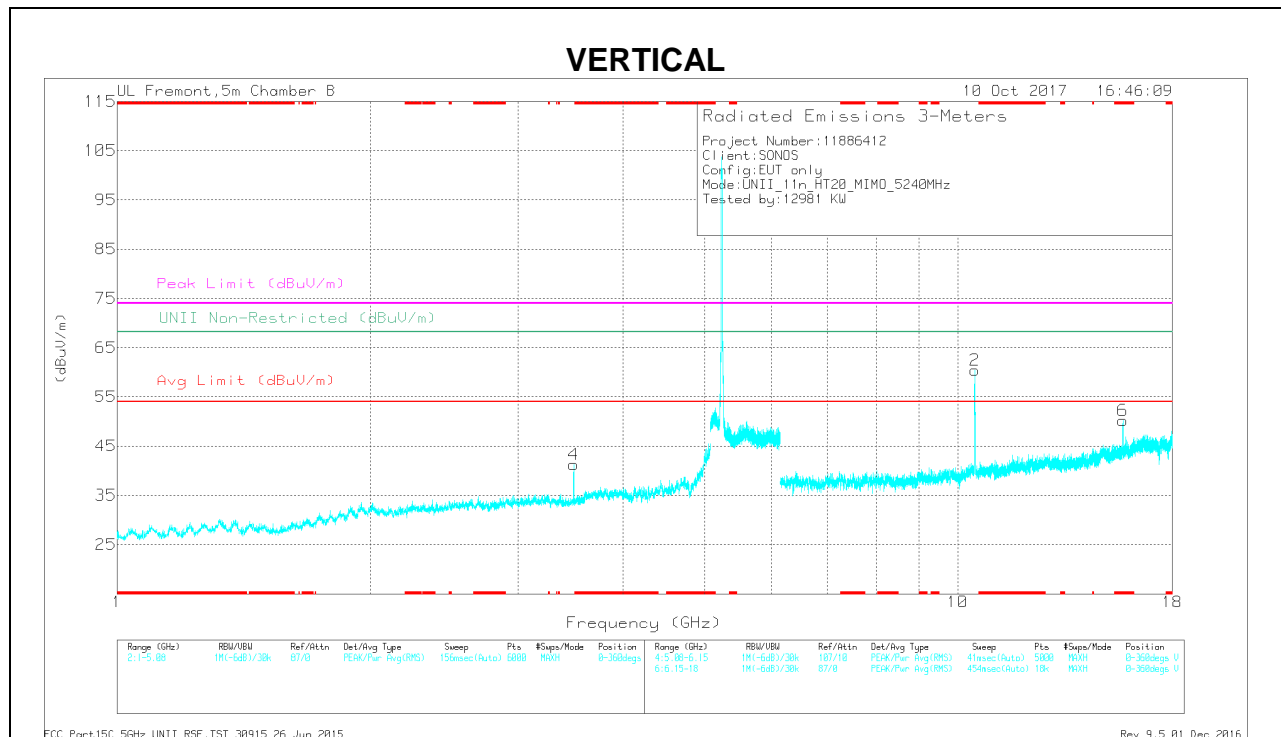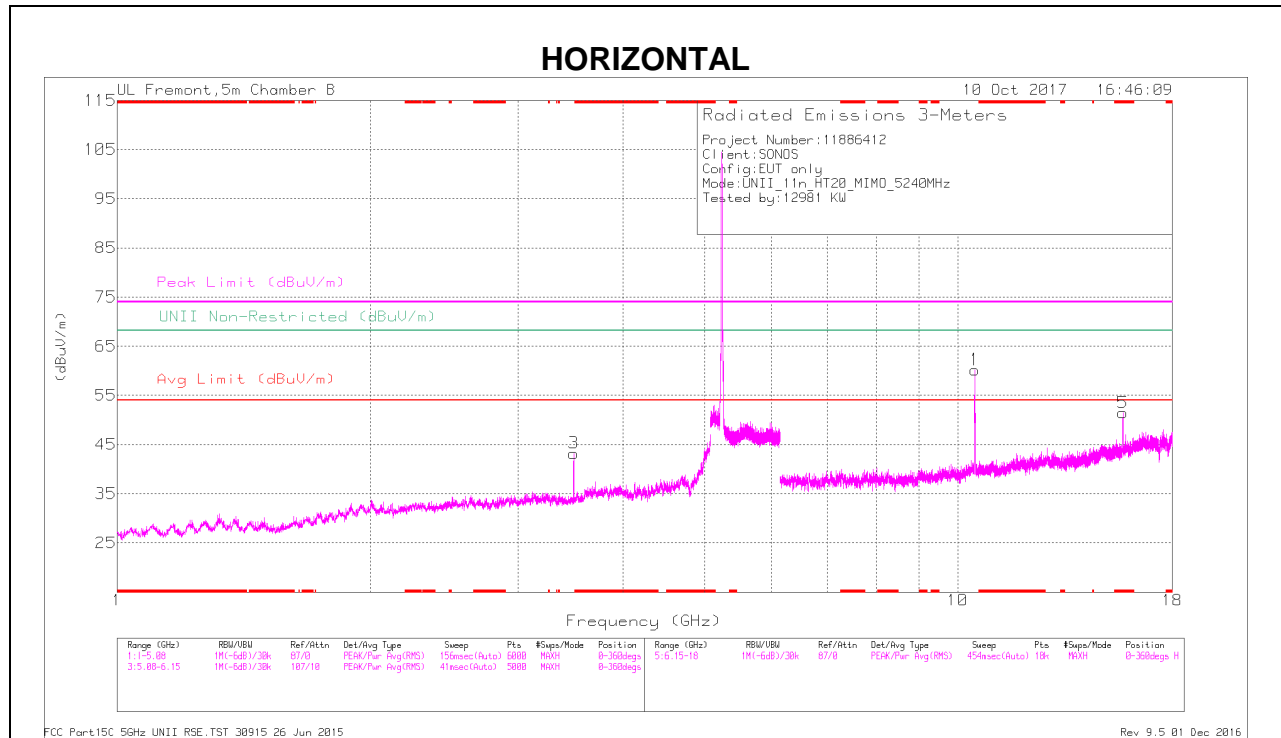

**RADIATED EMISSIONS**

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/ChkFtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 15.72	39.25	PK-U	40.8	-21.2	0	58.85	-	-	74	-15.15	-	-	42	209	H
* 15.72	28.02	ADR	40.8	-21.2	.56	46.18	54	-7.82	-	-	-	-	42	209	H
* 15.72	40.29	PK-U	40.8	-21.2	0	59.89	-	-	74	-14.11	-	-	101	209	V
* 15.721	26.81	ADR	40.8	-21.2	.56	46.97	54	-7.03	-	-	-	-	101	209	V
3.493	46.3	PK-U	32.8	-31	0	48.1	-	-	-	-	68.2	-20.1	59	314	H
3.493	43.82	PK-U	32.8	-31	0	45.62	-	-	-	-	68.2	-22.58	327	203	V
10.48	52.77	PK-U	37.5	-22.7	0	67.57	-	-	-	-	68.2	-63	175	335	V
10.481	49.12	PK-U	37.5	-22.7	0	63.92	-	-	-	-	68.2	-4.28	42	103	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK-U - U-NII: Maximum Peak  
 ADR - U-NII AD primary method, RMS average

### 7.1.2. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.3 GHz BAND

#### 4TX CDD MODE

#### BANDEDGE (HIGH CHANNEL)


#### HORIZONTAL RESULT

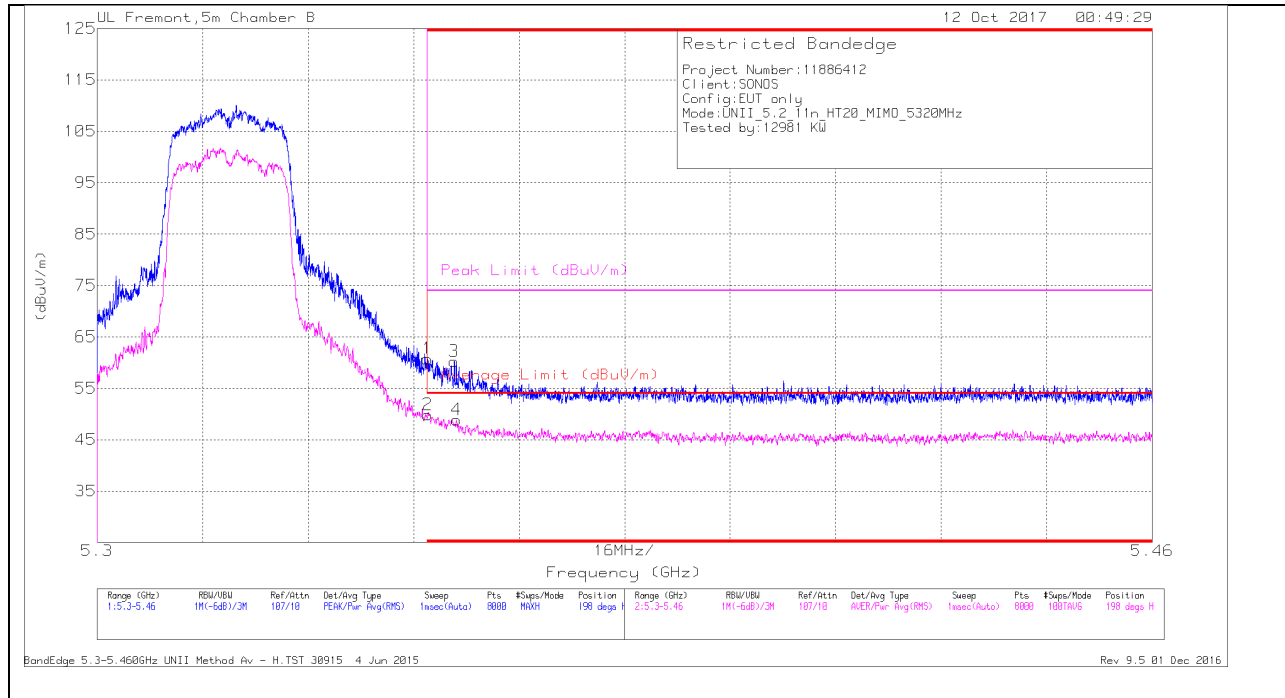

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cb/Filtz/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	45.97	Pk	34.9	-20.1	0	60.77	-	-	74	-13.23	198	390	H
3	* 5.354	45.45	Pk	34.9	-20.1	0	60.25	-	-	74	-13.75	198	390	H
2	* 5.35	34.51	RMS	34.9	-20.1	.56	49.87	54	-4.13	-	-	198	390	H
4	* 5.355	33.53	RMS	34.9	-20.1	.56	48.89	54	-5.11	-	-	198	390	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

### VERTICAL RESULT


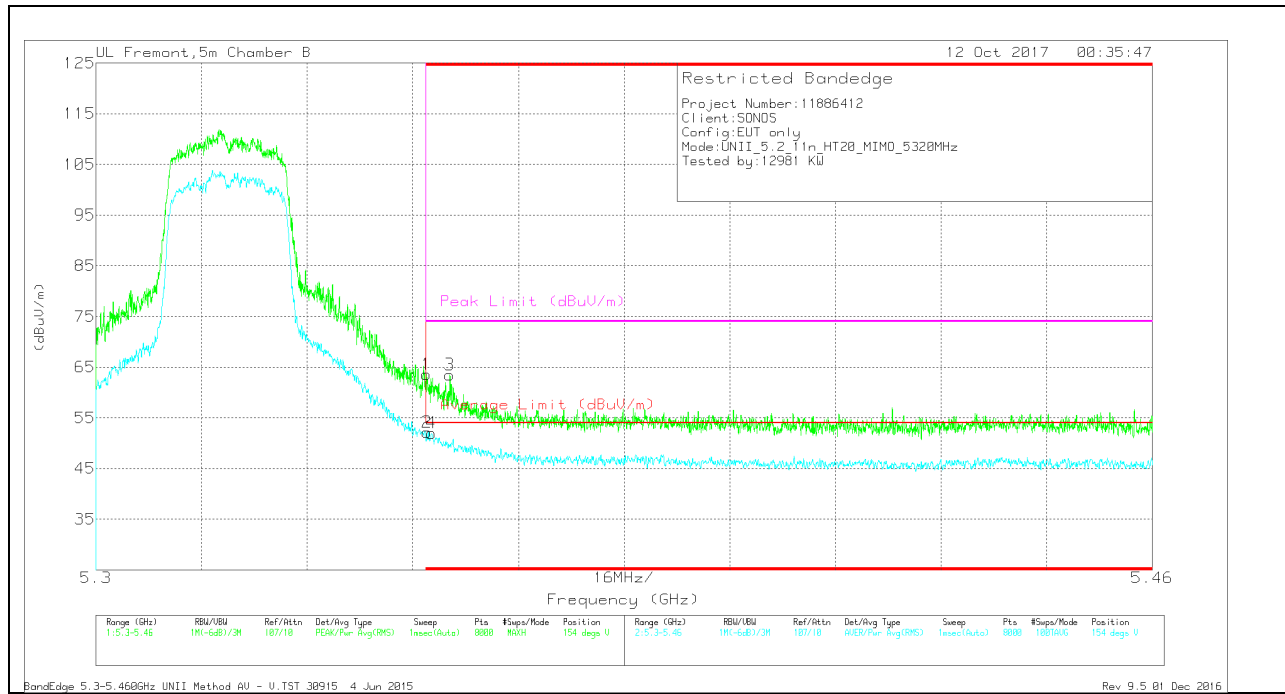


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/CbW/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	48.76	Pk	34.9	-20.1	0	63.56	-	-	74	-10.44	154	335	V
3	* 5.354	48.71	Pk	34.9	-20.1	0	63.51	-	-	74	-10.49	154	335	V
2	* 5.35	36.76	RMS	34.9	-20.1	.56	52.12	54	-1.88	-	-	154	335	V
4	* 5.351	36.61	RMS	34.9	-20.1	.56	51.97	54	-2.03	-	-	154	335	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

# HARMONICS AND SPURIOUS EMISSIONS

## LOW CHANNEL RESULTS

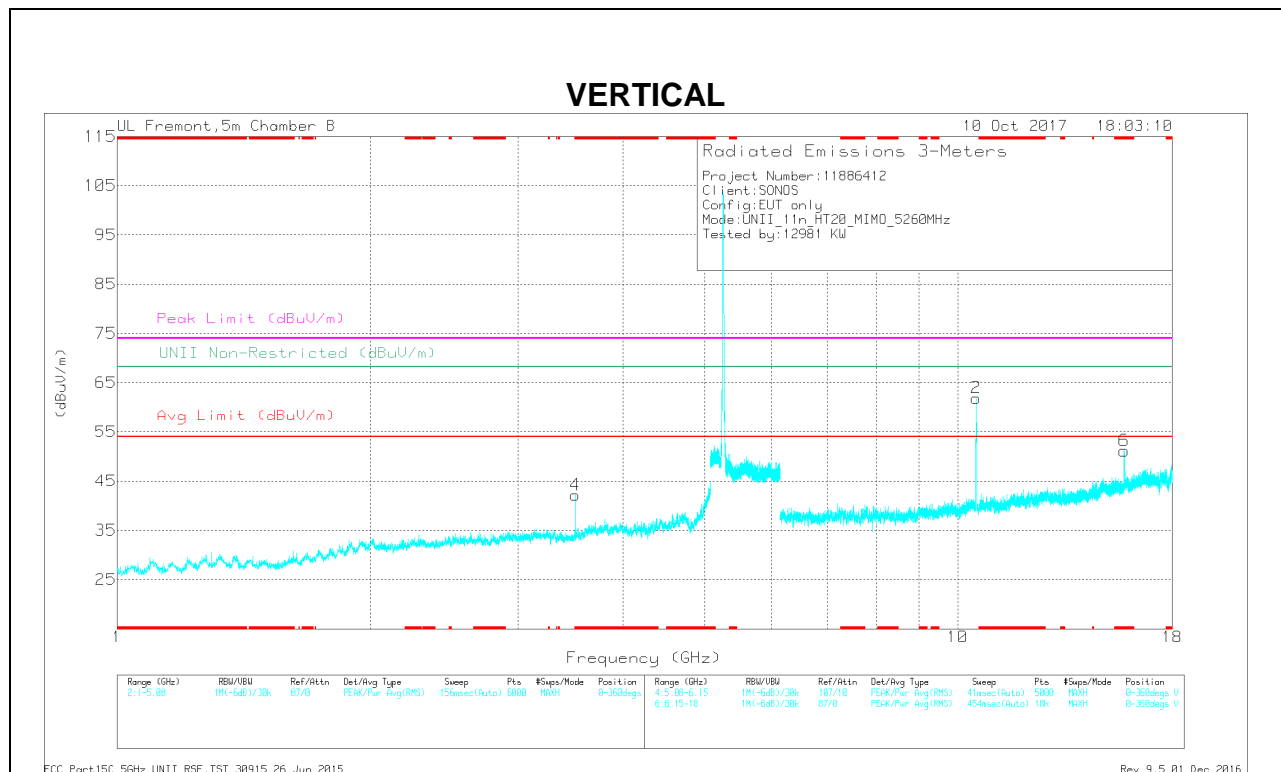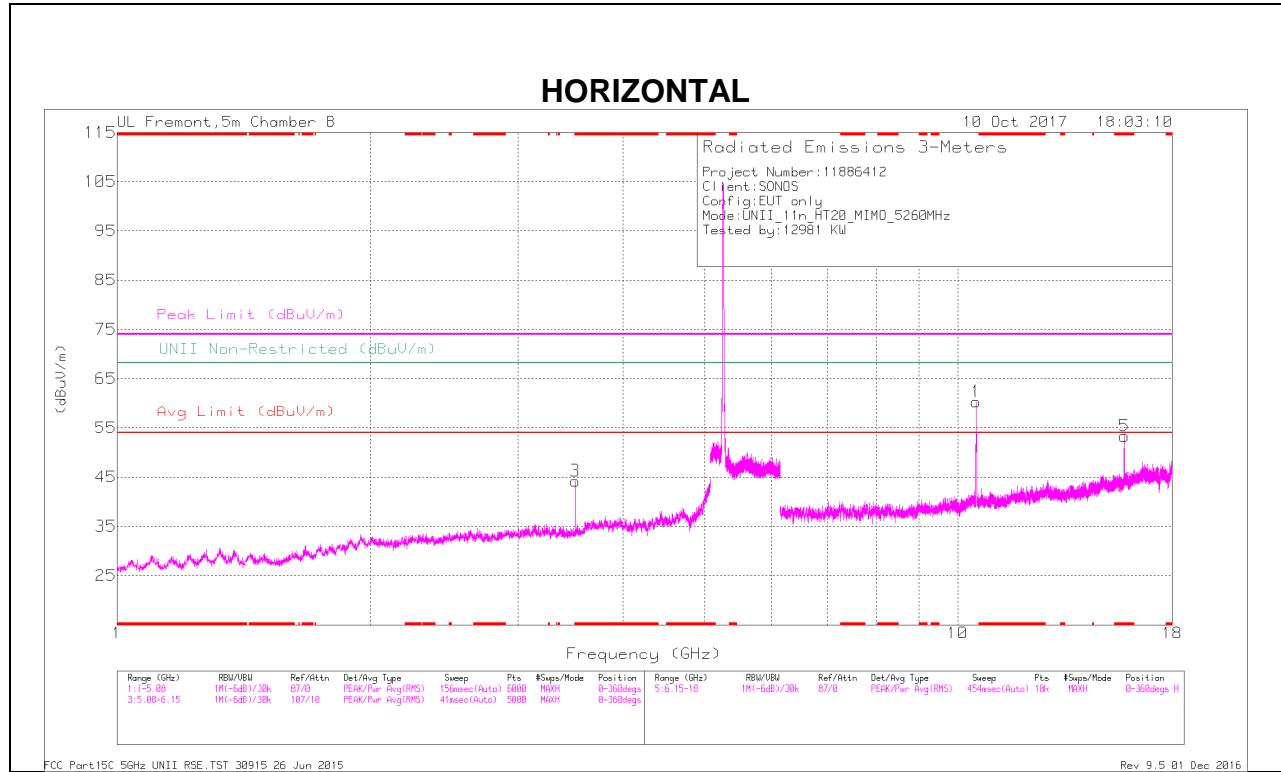





**RADIATED EMISSIONS**

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Chf/Fltr/Pad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.507	45.08	PK-U	32.8	-31	0	46.89	-	-	74	-27.12	-	-	56	269	H
* 3.507	41.05	ADR	32.8	-31	.56	43.41	54	-10.59	-	-	-	-	56	269	H
* 3.507	44.23	PK-U	32.8	-31	0	46.03	-	-	74	-27.97	-	-	301	201	V
* 3.507	38.88	ADR	32.8	-31	.56	41.24	54	-12.76	-	-	-	-	301	201	V
* 15.78	38.36	PK-U	40.9	-20.4	0	58.86	-	-	74	-15.14	-	-	7	399	H
* 15.78	23.22	ADR	40.9	-20.4	.56	46.28	54	-7.72	-	-	-	-	7	399	H
* 15.78	40.43	PK-U	40.9	-20.4	0	63.93	-	-	74	-13.07	-	-	71	108	V
* 15.779	26.33	ADR	40.9	-20.4	.56	47.39	54	-6.61	-	-	-	-	71	108	V
10.52	49.34	PK-U	37.6	-23.1	0	63.84	-	-	-	-	68.2	-4.36	219	315	H
10.52	52.6	PK-U	37.6	-23.1	0	67.1	-	-	-	-	68.2	-1.1	248	379	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK-U - U-NII: Maximum Peak  
 ADR - U-NII AD primary method, RMS average

### MID CHANNEL RESULTS

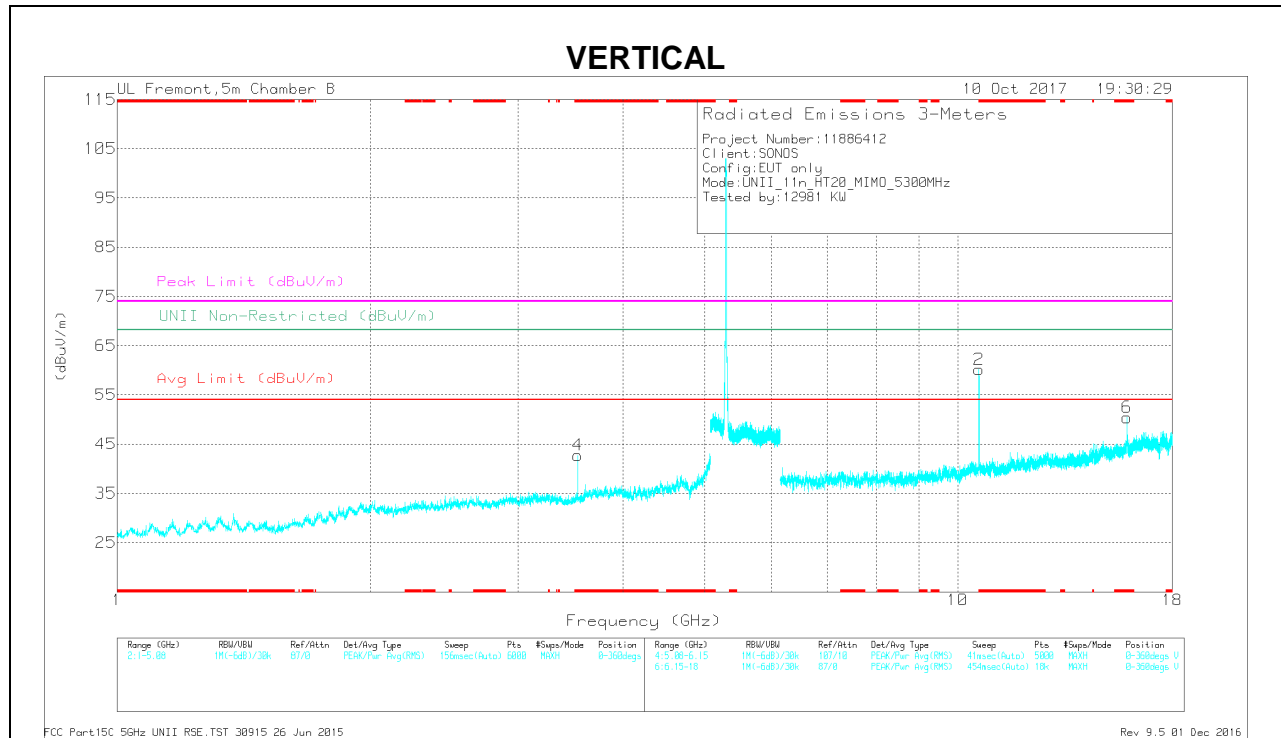
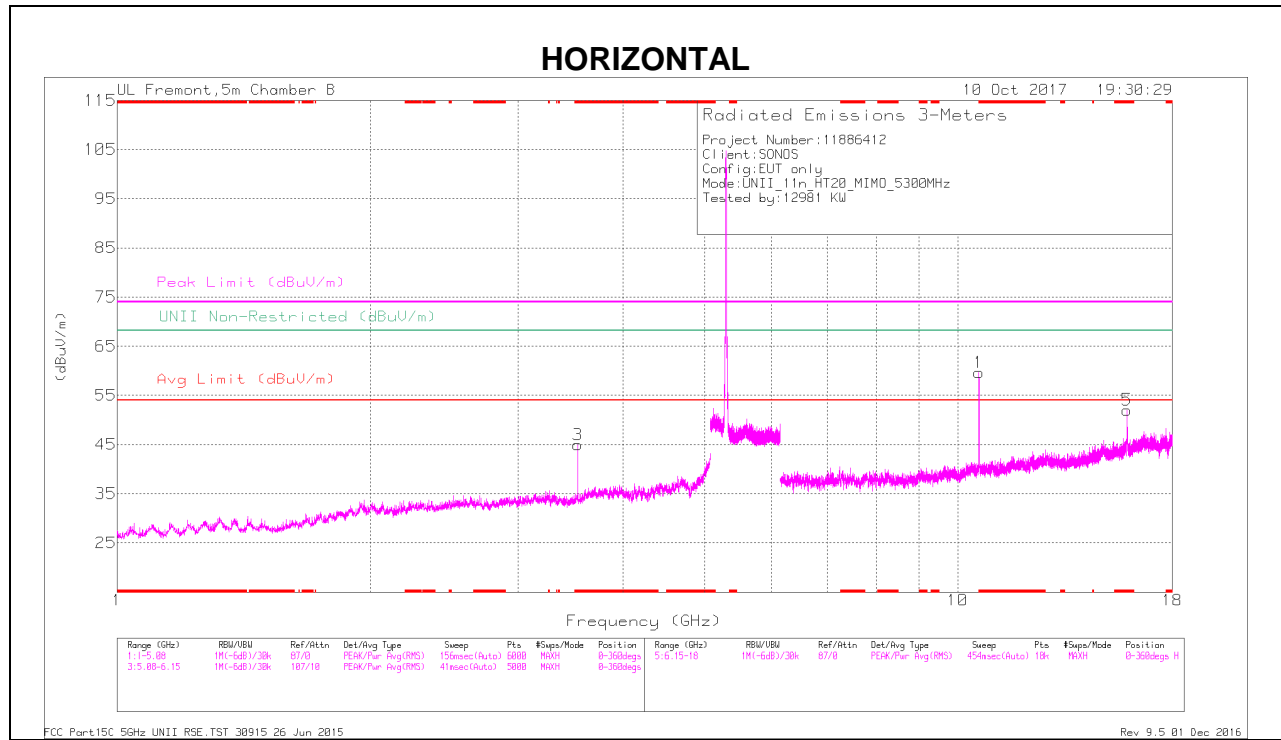


**RADIATED EMISSIONS**

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Chf/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.533	46.03	PK-U	32.9	-30.4	0	48.53	-	-	74	-25.47	-	-	49	279	H
* 3.533	41.94	ADR	32.9	-30.4	.56	45	54	-9	-	-	-	-	49	279	H
* 3.533	44.22	PK-U	32.9	-30.4	0	46.72	-	-	74	-27.28	-	-	306	196	V
* 3.533	39.04	ADR	32.9	-30.4	.56	42.1	54	-11.9	-	-	-	-	306	196	V
* 15.9	39.35	PK-U	41	-19.1	0	61.25	-	-	74	-12.75	-	-	50	109	H
* 15.9	25.8	ADR	41	-19.1	.56	48.26	54	-5.74	-	-	-	-	50	109	H
* 15.9	39.5	PK-U	41	-19.1	0	61.4	-	-	74	-12.6	-	-	13	257	V
* 15.901	26.44	ADR	41	-19.1	.56	48.9	54	-5.1	-	-	-	-	13	257	V
10.6	47.48	PK-U	37.6	-23.5	0	61.58	-	-	-	-	68.2	-6.62	52	333	H
10.6	53.15	PK-U	37.6	-23.5	0	67.25	-	-	-	-	68.2	-9.5	189	232	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK-U - U-NII: Maximum Peak  
 ADR - U-NII AD primary method, RMS average

### HIGH CHANNEL RESULTS

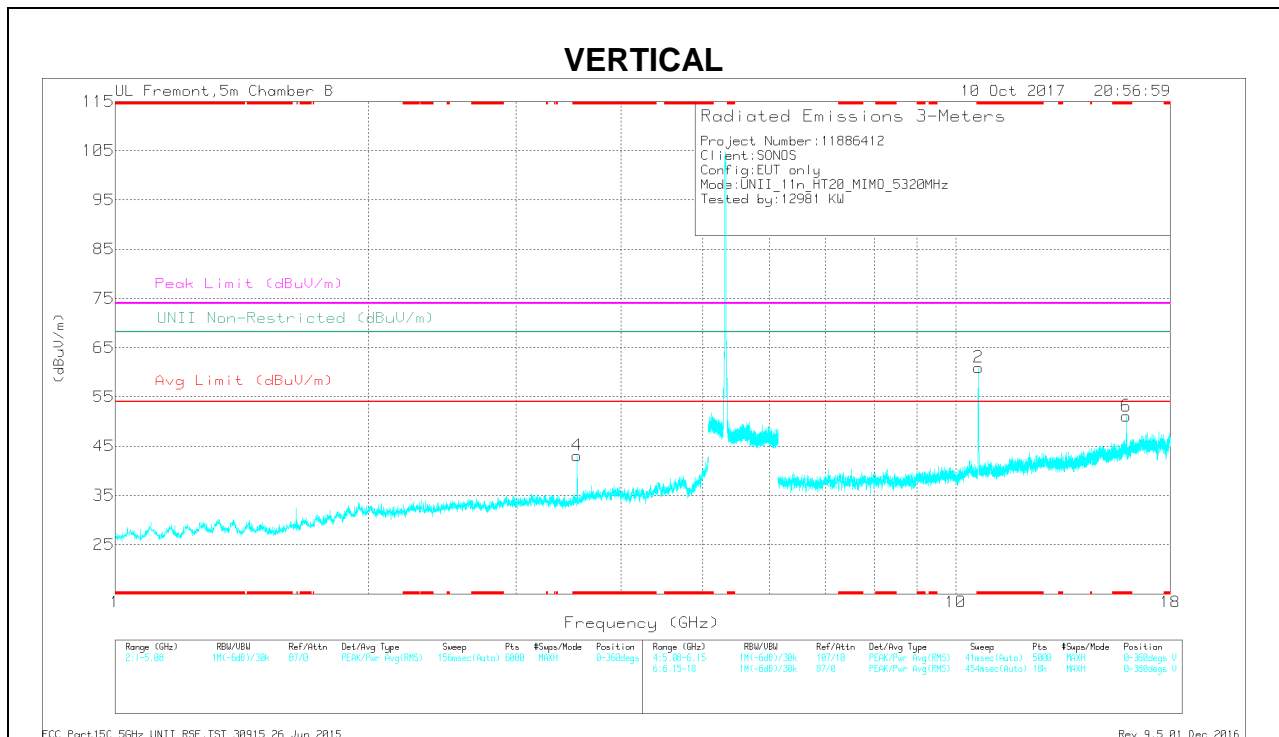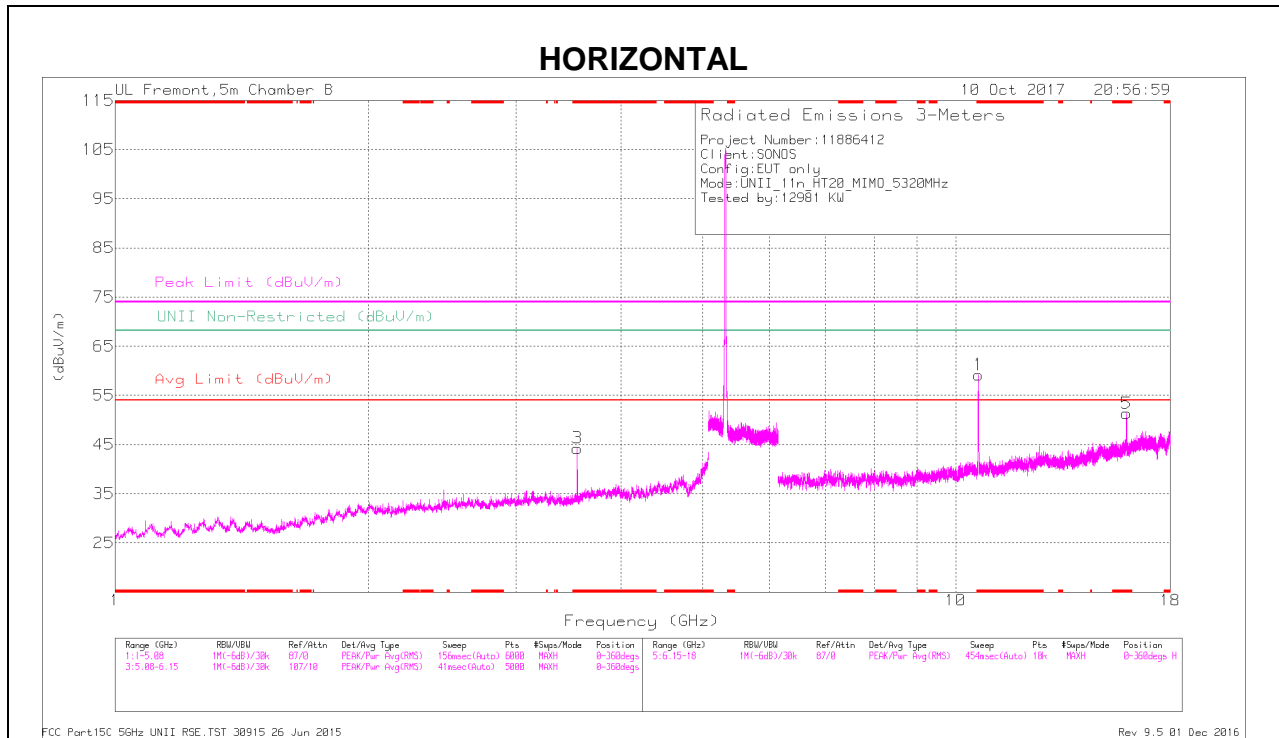

**RADIATED EMISSIONS**

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Chf/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.547	46.61	PK-U	33	-30.6	0	49.01	-	-	74	-24.99	-	-	59	324	H
* 3.547	41.69	ADR	33	-30.6	.56	44.65	54	-9.35	-	-	-	-	59	324	H
* 3.547	44.67	PK-U	33	-30.6	0	47.27	-	-	74	-26.73	-	-	308	159	V
* 3.547	38.72	ADR	33	-30.6	.56	41.68	54	-12.32	-	-	-	-	308	159	V
* 10.64	48.76	PK-U	37.6	-22.5	0	63.86	-	-	74	-10.14	-	-	223	104	H
* 10.64	35.79	ADR	37.6	-22.5	.56	51.45	54	-2.55	-	-	-	-	223	104	H
* 15.963	37.4	PK-U	41.1	-19.9	0	58.6	-	-	74	-15.4	-	-	73	102	H
* 15.963	22.81	ADR	41.1	-19.9	.56	44.57	54	-9.43	-	-	-	-	73	102	H
* 10.64	48.68	PK-U	37.6	-22.5	0	63.78	-	-	74	-10.22	-	-	40	119	V
* 10.64	37.7	ADR	37.6	-22.5	.56	53.36	54	-64	-	-	-	-	40	119	V
* 15.36	38.93	PK-U	41.1	-20	0	60.03	-	-	74	-13.97	-	-	15	284	V
* 15.959	24.6	ADR	41.1	-20	.56	46.26	54	-7.74	-	-	-	-	15	284	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK-U - U-NII: Maximum Peak  
 ADR - U-NII AD primary method, RMS average

### 7.1.3. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.6 GHz BAND

#### 4TX CDD MODE

#### BANDEDGE (LOW CHANNEL)

#### HORIZONTAL RESULT

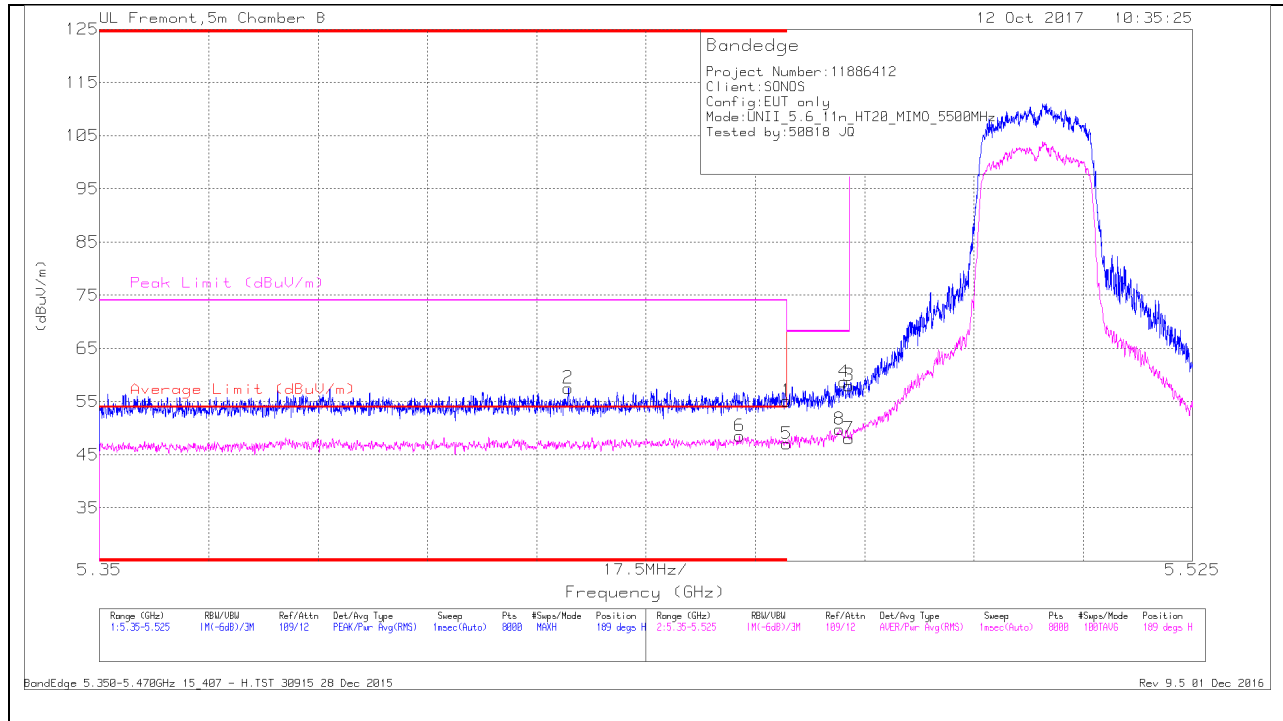


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cable/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.425	41.14	Pk	35.1	-18.7	0	57.54	-	-	74	-10.46	189	239	H
6	* 5.452	31.69	RMS	35.1	-18.8	.56	48.55	54	-5.45	-	-	189	239	H
1	* 5.46	38.82	Pk	35.2	-18.9	0	55.12	-	-	74	-18.88	189	239	H
5	* 5.46	30.22	RMS	35.2	-18.9	.56	47.08	54	-6.92	-	-	189	239	H
8	5.468	32.93	RMS	35.2	-18.9	.56	49.79	-	-	-	-	189	239	H
4	5.469	42.42	Pk	35.2	-18.9	0	58.72	-	-	68.2	-9.48	189	239	H
3	5.47	41.72	Pk	35.2	-18.9	0	58.02	-	-	68.2	-10.18	189	239	H
7	5.47	31.21	RMS	35.2	-18.9	.56	48.07	-	-	-	-	189	239	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

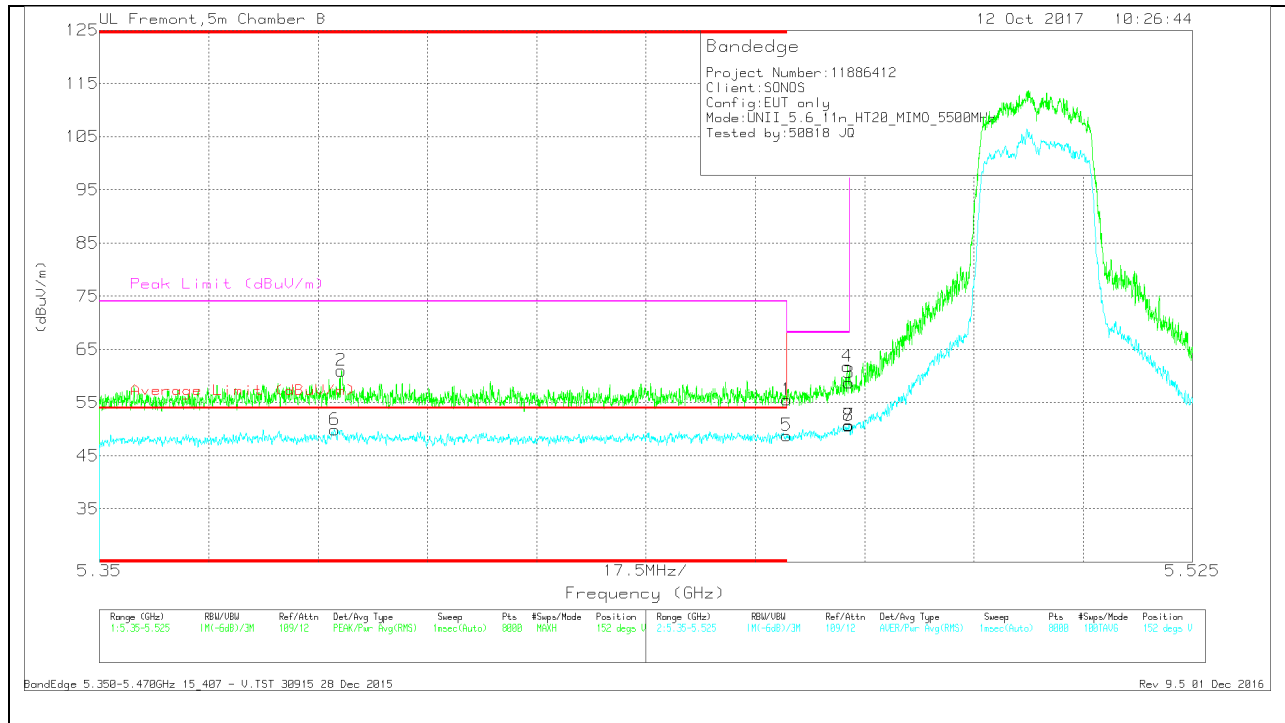


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 5.388	32.95	RMS	35	-18.6	.56	49.91	54	-4.09	-	-	152	310	V
2	* 5.389	44.61	Pk	35	-18.6	0	61.01	-	-	74	-12.99	152	310	V
1	* 5.46	39.23	Pk	35.2	-18.9	0	55.53	-	-	74	-18.47	152	310	V
5	* 5.46	31.96	RMS	35.2	-18.9	.56	48.82	54	-5.18	-	-	152	310	V
3	5.47	42.4	Pk	35.2	-18.9	0	58.7	-	-	68.2	-9.5	152	310	V
4	5.47	45.51	Pk	35.2	-18.9	0	61.81	-	-	68.2	-6.39	152	310	V
7	5.47	33.86	RMS	35.2	-18.9	.56	50.72	-	-	-	-	152	310	V
8	5.47	33.79	RMS	35.2	-18.9	.56	50.65	-	-	-	-	152	310	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**BANEDGE (HIGH CHANNEL)**

**HORIZONTAL RESULT**

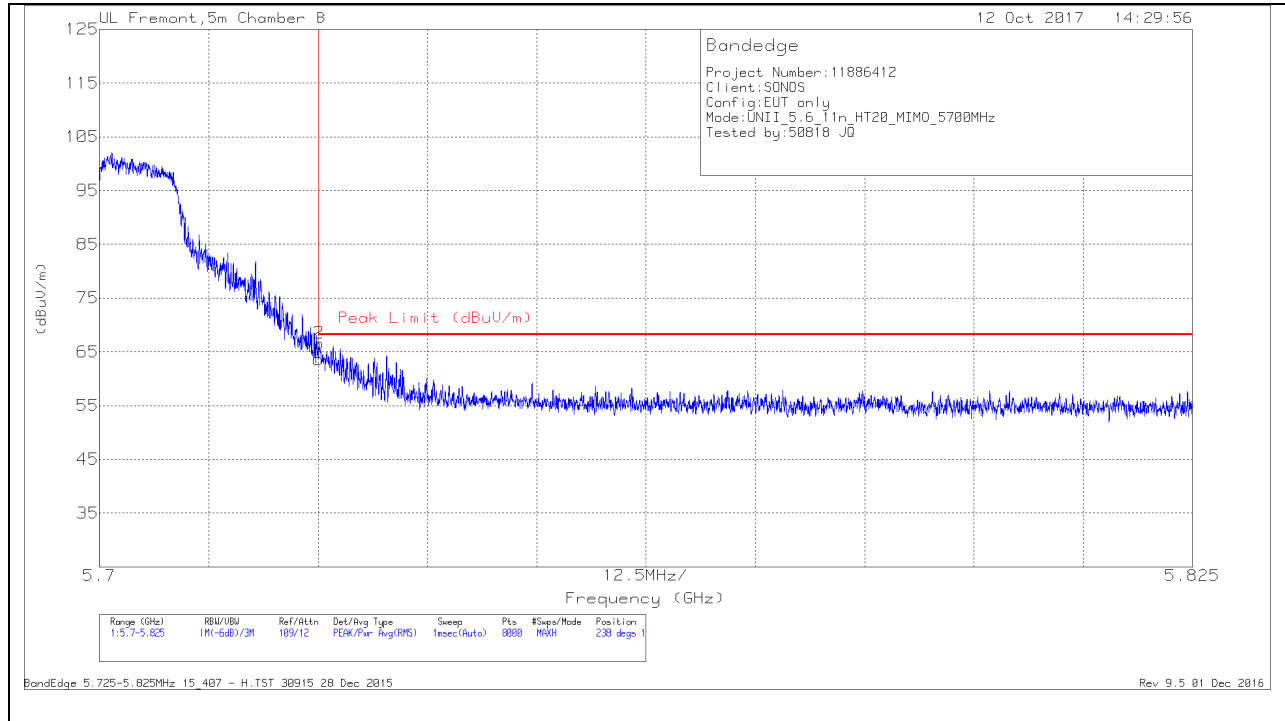


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cb/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	48.14	Pk	35	-19.5	63.64	68.2	-4.56	238	102	H
2	5.725	51.08	Pk	35	-19.5	66.58	68.2	-1.62	238	102	H

Pk - Peak detector



### VERTICAL RESULT


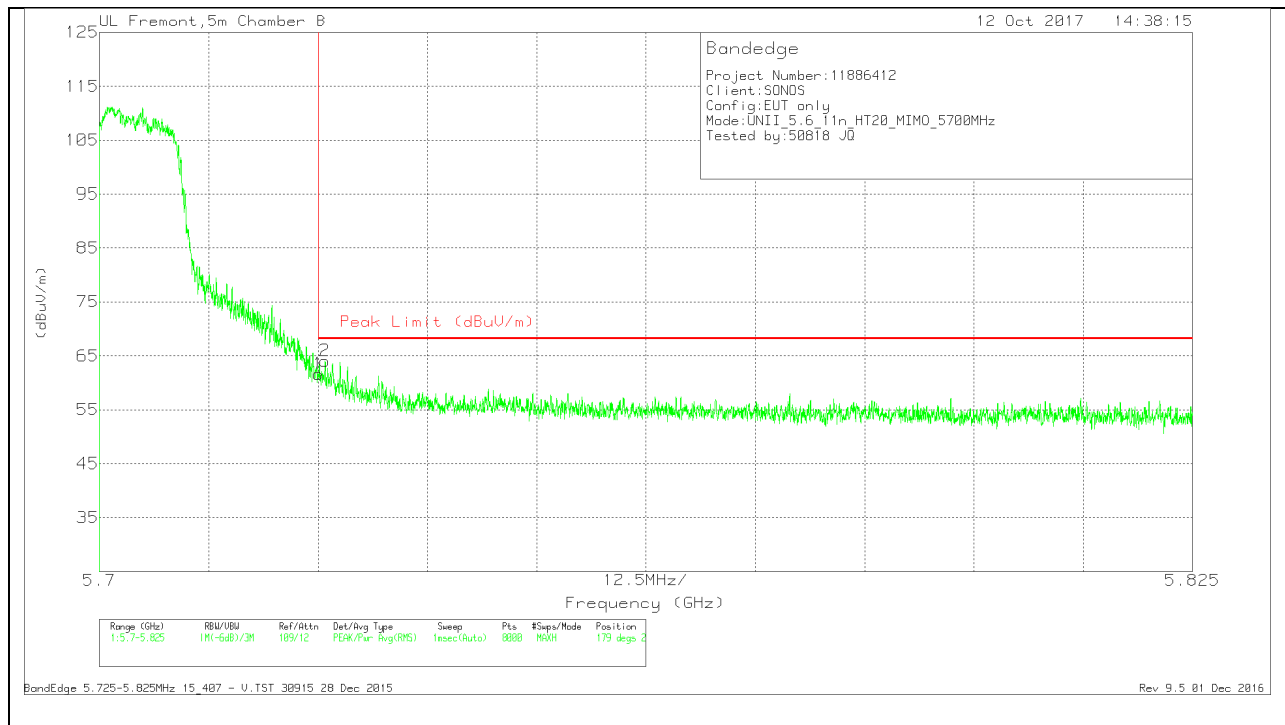


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	46.14	Pk	35	-19.5	61.64	68.2	-6.56	179	240	V
2	5.726	48.55	Pk	35	-19.5	64.05	68.2	-4.15	179	240	V

Pk - Peak detector

# HARMONICS AND SPURIOUS EMISSIONS

## LOW CHANNEL RESULTS

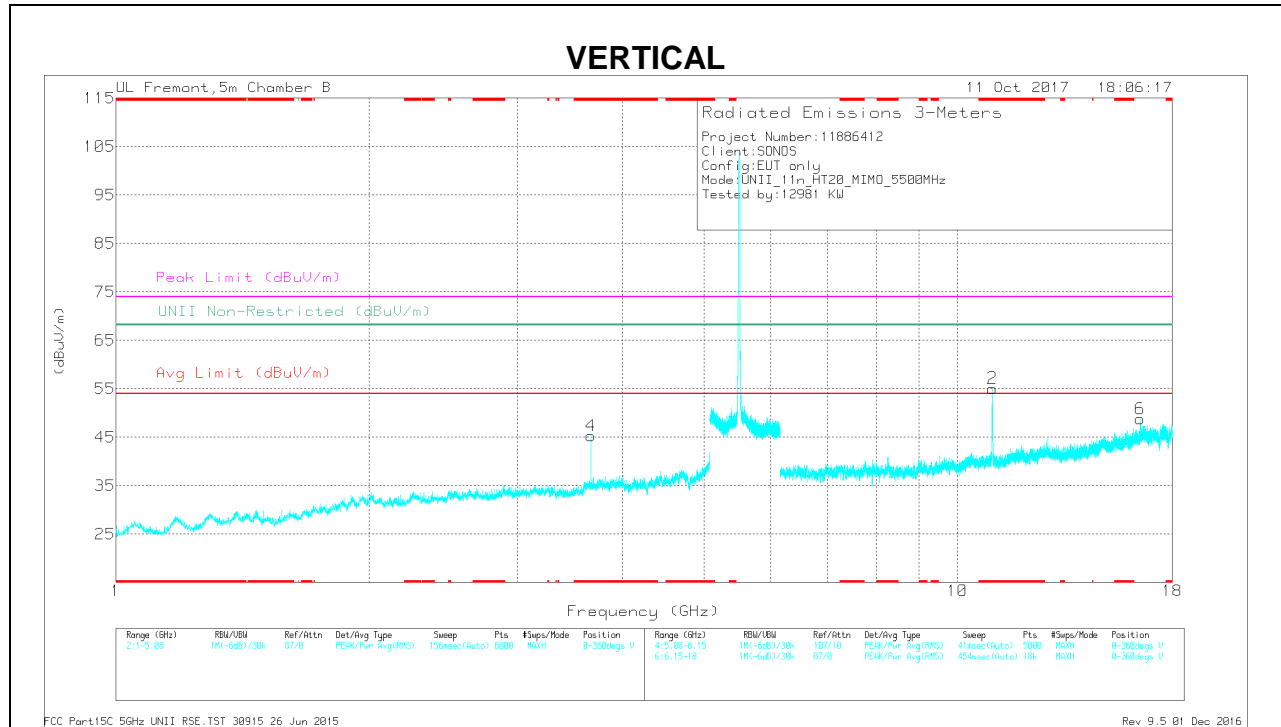
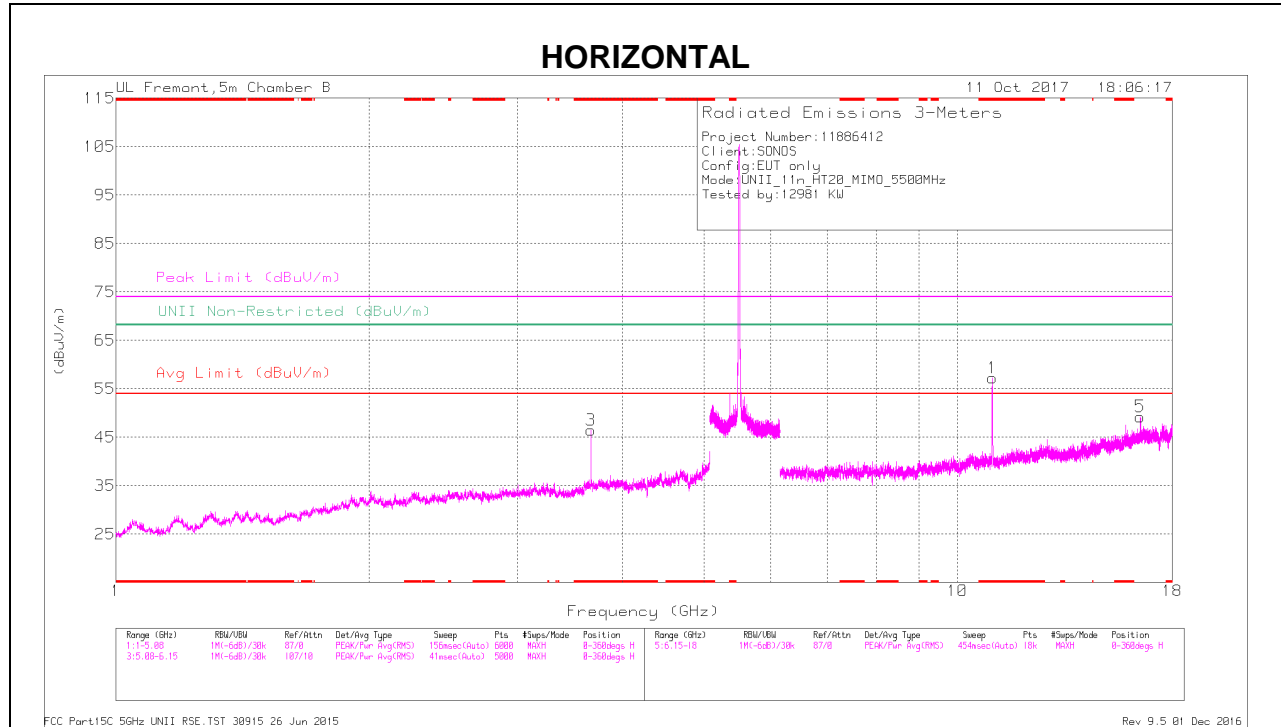


**RADIATED EMISSIONS**

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cable/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.667	47.42	PK-U	33.2	-30.8	0	49.82	-	-	74	-24.18	-	-	47	218	H
* 3.667	43.26	ADR	33.2	-30.8	.56	46.22	54	-7.78	-	-	-	-	47	218	H
* 3.667	46.38	PK-U	33.2	-30.8	0	49.78	-	-	74	-25.22	-	-	302	201	V
* 3.667	41.21	ADR	33.2	-30.8	.56	44.17	54	-9.83	-	-	-	-	302	201	V
* 11	49.09	PK-U	37.7	-21.5	0	65.29	-	-	74	-8.71	-	-	18	374	H
* 11	34.95	ADR	37.7	-21.5	.56	51.71	54	-2.29	-	-	-	-	18	374	H
* 11	48.52	PK-U	37.7	-21.5	0	64.72	-	-	74	-9.28	-	-	172	371	V
* 11	36.3	ADR	37.7	-21.5	.56	53.06	54	-.94	-	-	-	-	172	371	V
16.494	32.37	PK-U	41.7	-19.7	0	54.37	-	-	-	-	68.2	-13.83	95	281	H
16.499	33.78	PK-U	41.8	-19.7	0	55.88	-	-	-	-	68.2	-12.32	122	348	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK-U - U-NII: Maximum Peak  
 ADR - U-NII AD primary method, RMS average

### MID CHANNEL RESULTS

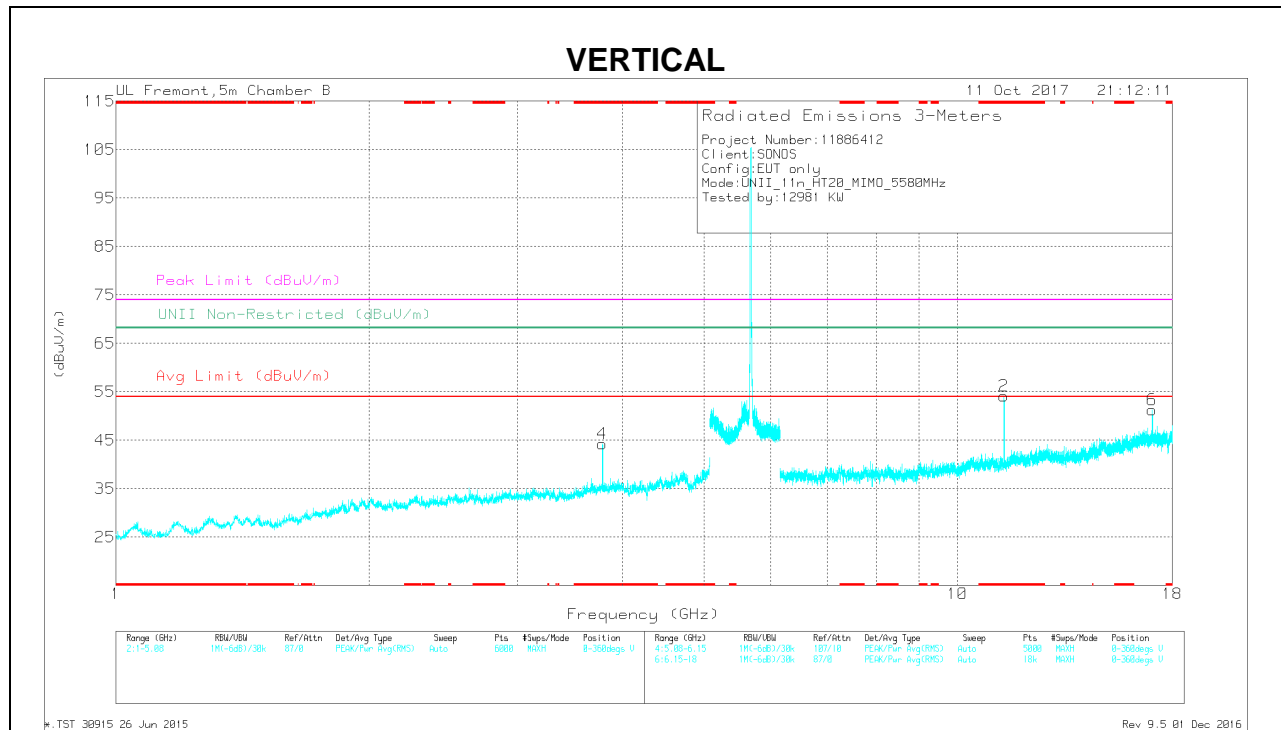
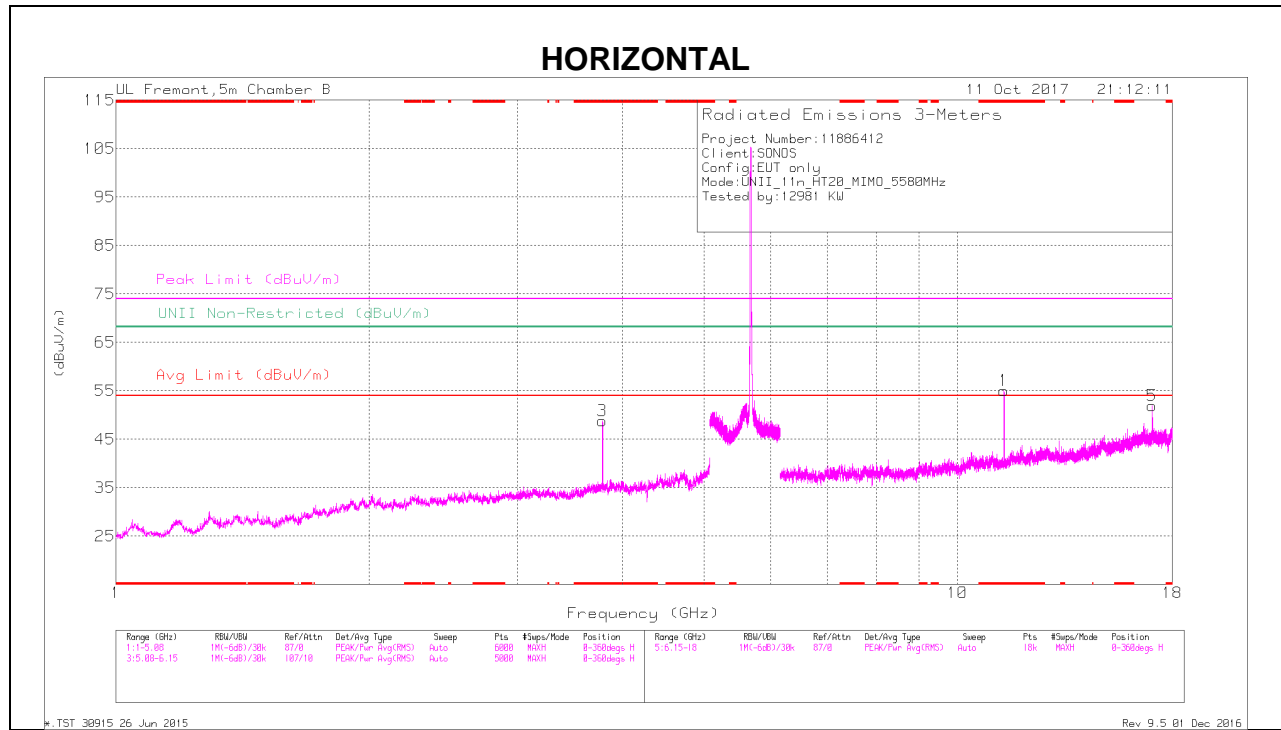


**RADIATED EMISSIONS**

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Chf/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.787	48.33	PK-U	33.5	-30.9	0	50.93	-	-	74	-23.07	-	-	48	251	H
* 3.787	43.27	ADR	33.5	-30.9	.56	48.43	54	-5.57	-	-	-	-	48	251	H
* 3.787	46.09	PK-U	33.5	-30.9	0	48.69	-	-	74	-25.31	-	-	316	224	V
* 3.787	41.82	ADR	33.5	-30.9	.56	44.98	54	-9.02	-	-	-	-	316	224	V
* 11.361	48.11	PK-U	37.9	-23	0	63.01	-	-	74	-10.99	-	-	26	118	H
* 11.36	37.72	ADR	37.9	-23	.56	53.18	54	-82	-	-	-	-	26	118	H
* 11.36	47.12	PK-U	37.9	-23	0	62.02	-	-	74	-11.98	-	-	163	306	V
* 11.36	35.32	ADR	37.9	-23	.56	50.78	54	-3.22	-	-	-	-	163	306	V
17.04	38.7	PK-U	42	-19.8	0	60.9	-	-	-	-	68.2	-7.3	72	400	H
17.04	39.19	PK-U	42	-19.8	0	61.39	-	-	-	-	68.2	-6.81	50	265	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK-U - U-NII: Maximum Peak  
 ADR - U-NII AD primary method, RMS average

### HIGH CHANNEL RESULTS

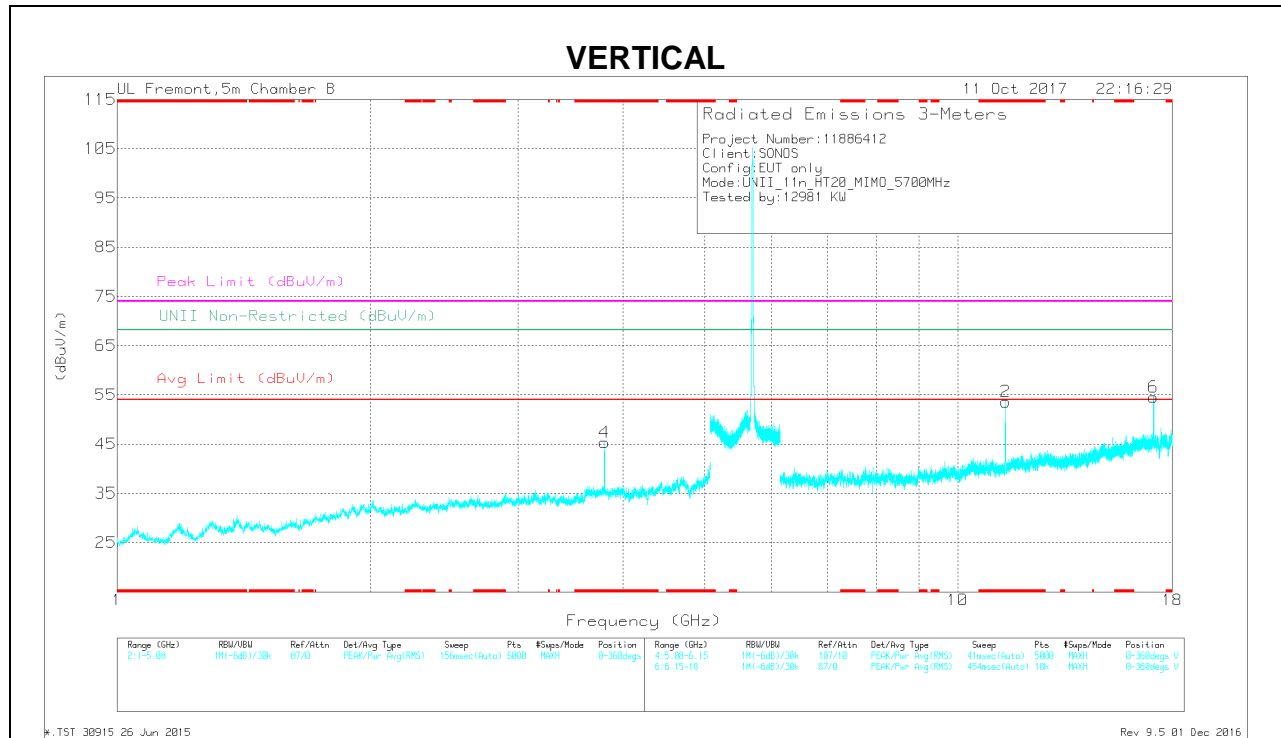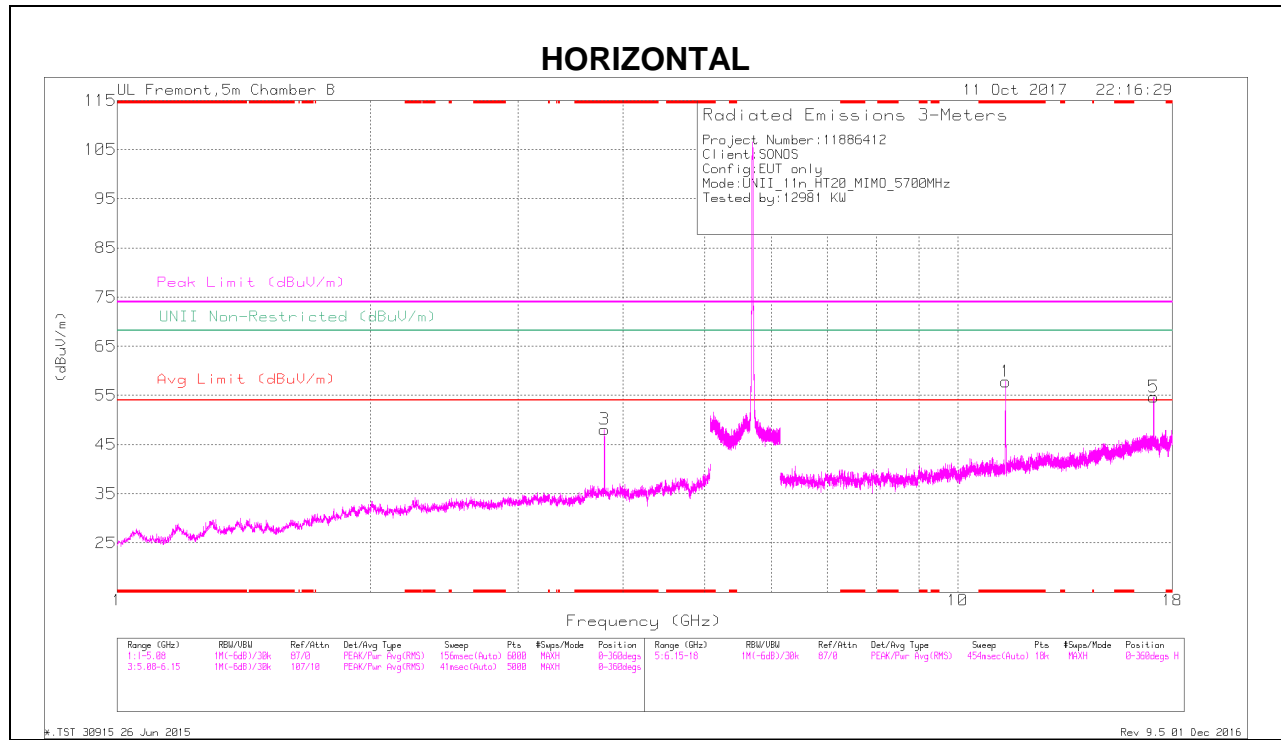

**RADIATED EMISSIONS**

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Chf/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.8	48.74	PK-U	33.6	-30.8	0	51.54	-	-	74	-22.46	-	-	51	201	H
* 3.8	44.31	ADR	33.6	-30.8	.56	47.67	54	-6.33	-	-	-	-	51	201	H
* 3.8	46.07	PK-U	33.6	-30.8	0	49.67	-	-	74	-25.13	-	-	311	172	V
* 3.8	40.62	ADR	33.6	-30.8	.56	43.98	54	-10.02	-	-	-	-	311	172	V
* 11.4	50.32	PK-U	38	-23	0	65.32	-	-	74	-8.68	-	-	50	279	H
* 11.4	36.95	ADR	38	-23	.56	52.51	54	-1.49	-	-	-	-	50	279	H
* 11.401	47.38	PK-U	38	-23	0	62.38	-	-	74	-11.62	-	-	163	309	V
* 11.4	34.06	ADR	38	-23	.56	49.62	54	-4.38	-	-	-	-	163	309	V
17.1	37.33	PK-U	41.9	-19.8	0	59.43	-	-	-	-	68.2	-8.77	54	293	V
17.107	32.14	PK-U	41.9	-19.8	0	54.24	-	-	-	-	68.2	-13.96	291	164	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK-U - U-NII: Maximum Peak  
 ADR - U-NII AD primary method, RMS average

### 7.1.4. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.8 GHz BAND

#### 4TX CDD MODE

#### BANDEDGE (LOW CHANNEL)

#### HORIZONTAL RESULT

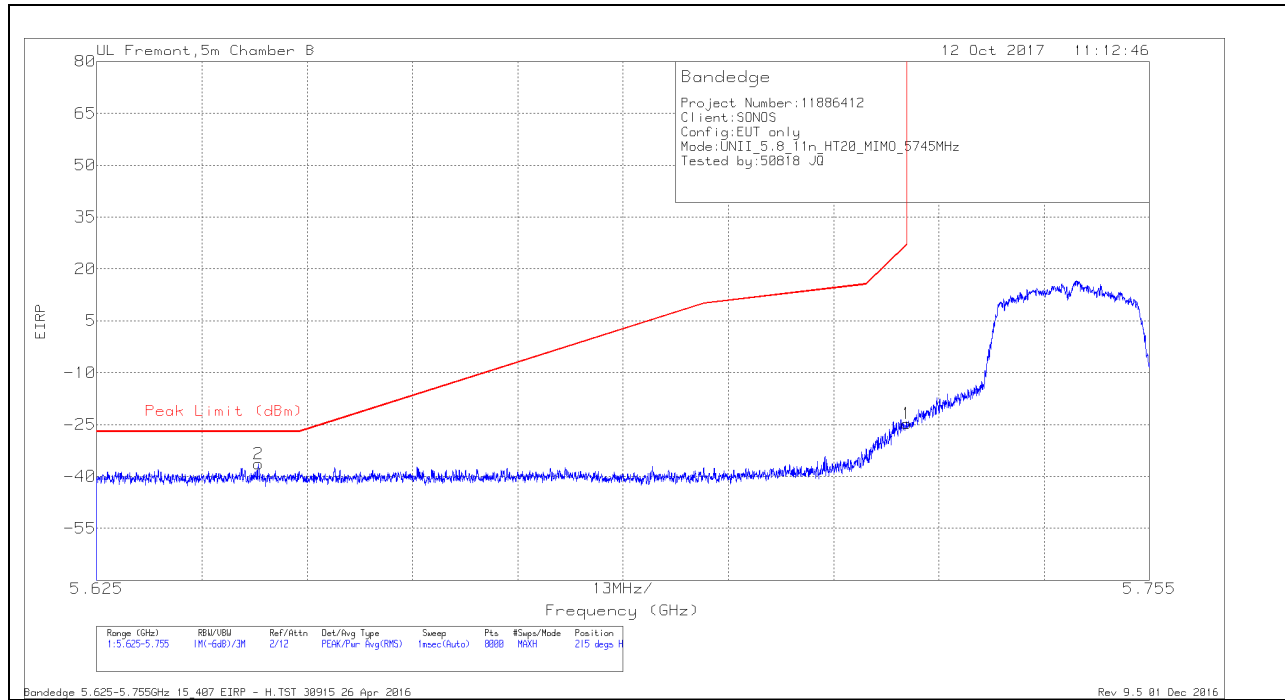


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.645	-64.02	Pk	35.3	-19.5	11.8	-36.42	-27	-9.42	215	195	H
1	5.725	-52.05	Pk	35	-19.5	11.8	-24.75	27	-51.75	215	195	H

Pk - Peak detector



### VERTICAL RESULT

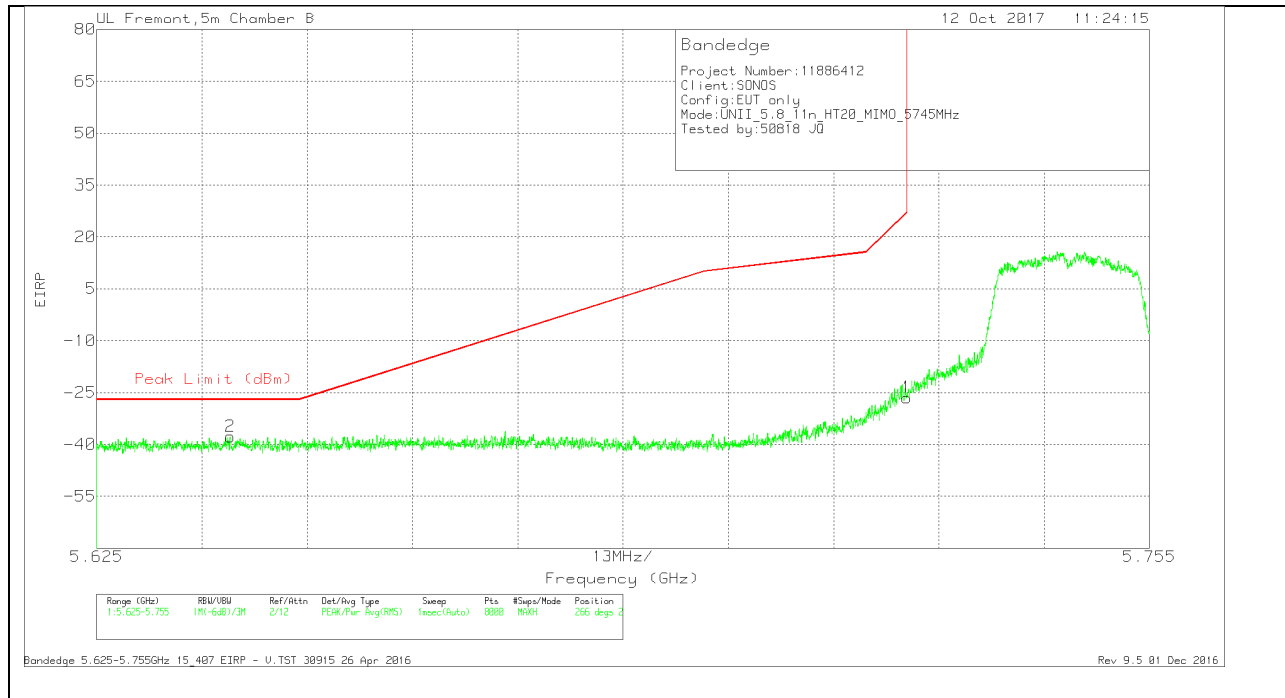


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cb/Fitr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.641	-65.42	Pk	35.3	-19.4	11.8	-37.72	-27	-10.72	266	228	V
1	5.725	-53.75	Pk	35	-19.5	11.8	-26.45	27	-53.45	266	228	V

Pk - Peak detector

**BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL RESULT**

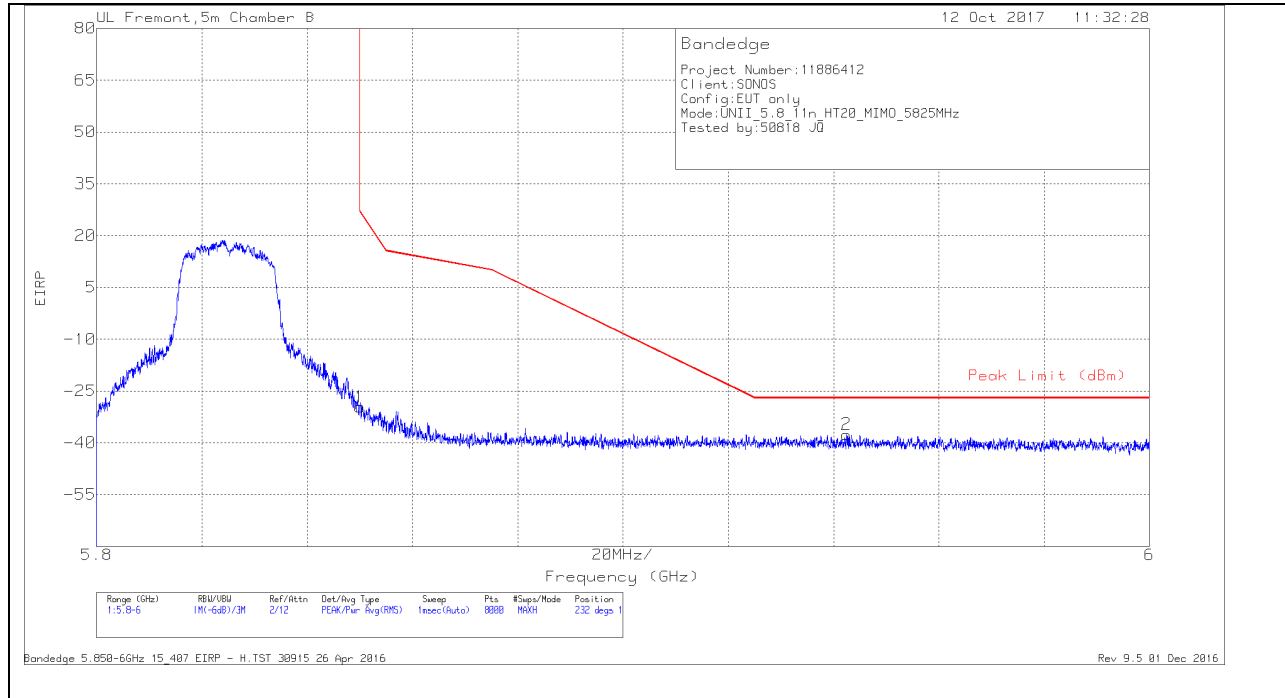

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-57.2	Pk	35.1	-19.3	11.8	-29.6	26.99	-56.59	232	174	H
2	5.942	-65.57	Pk	35.2	-19	11.8	-37.57	-27	-10.57	232	174	H

Pk - Peak detector

### VERTICAL RESULT


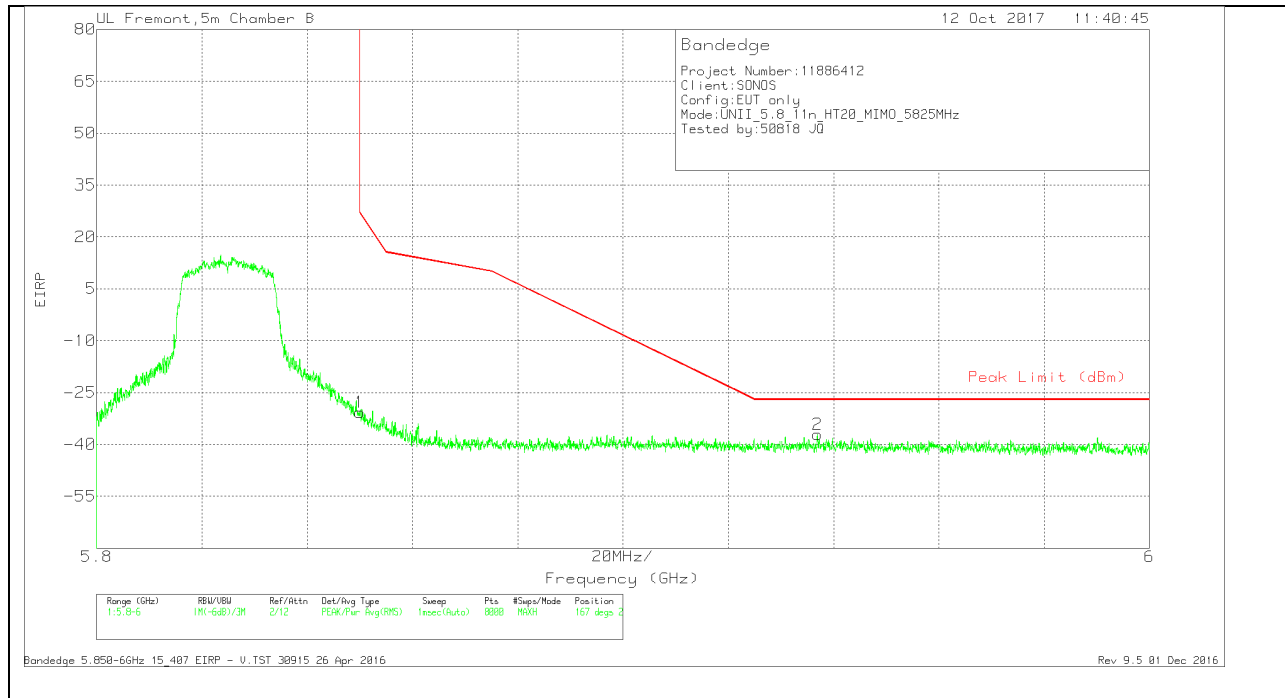


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cb/Fitr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-58.33	Pk	35.1	-19.3	11.8	-30.73	26.99	-57.72	167	208	V
2	5.937	-65.16	Pk	35.2	-18.9	11.8	-37.06	-27	-10.06	167	208	V

Pk - Peak detector

# HARMONICS AND SPURIOUS EMISSIONS

## LOW CHANNEL RESULTS

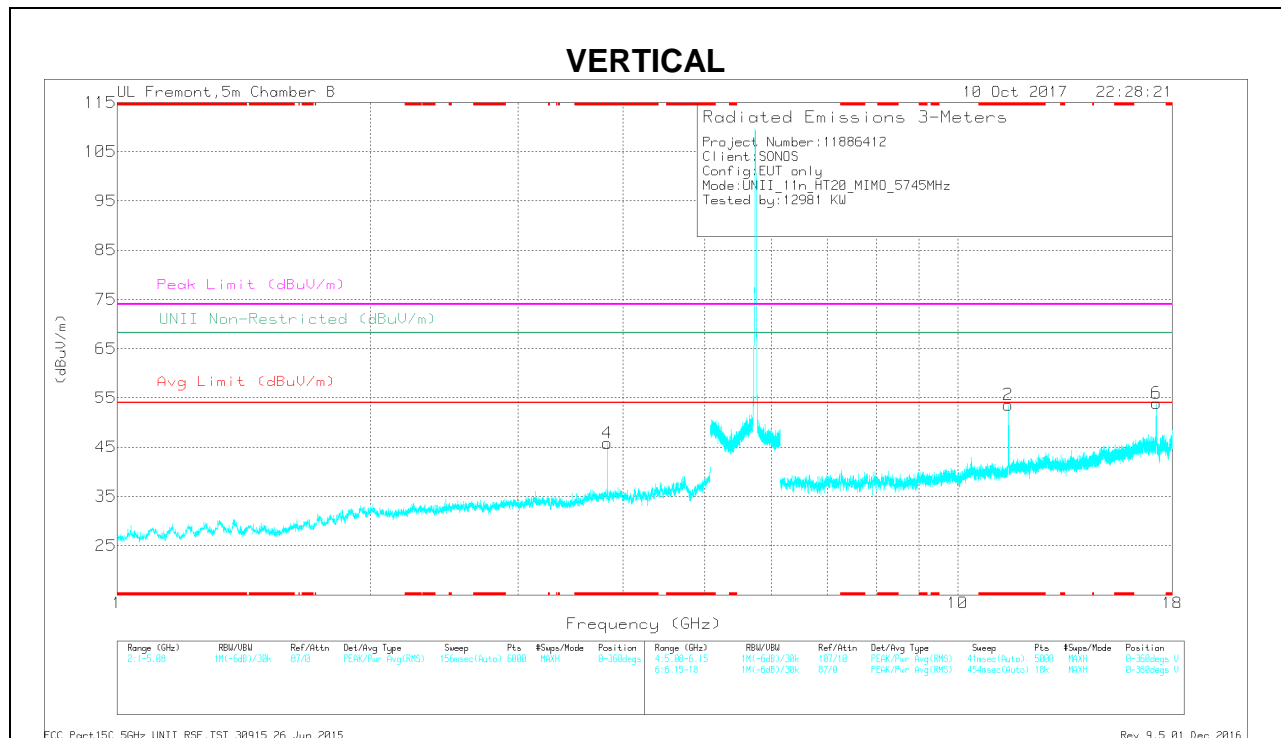
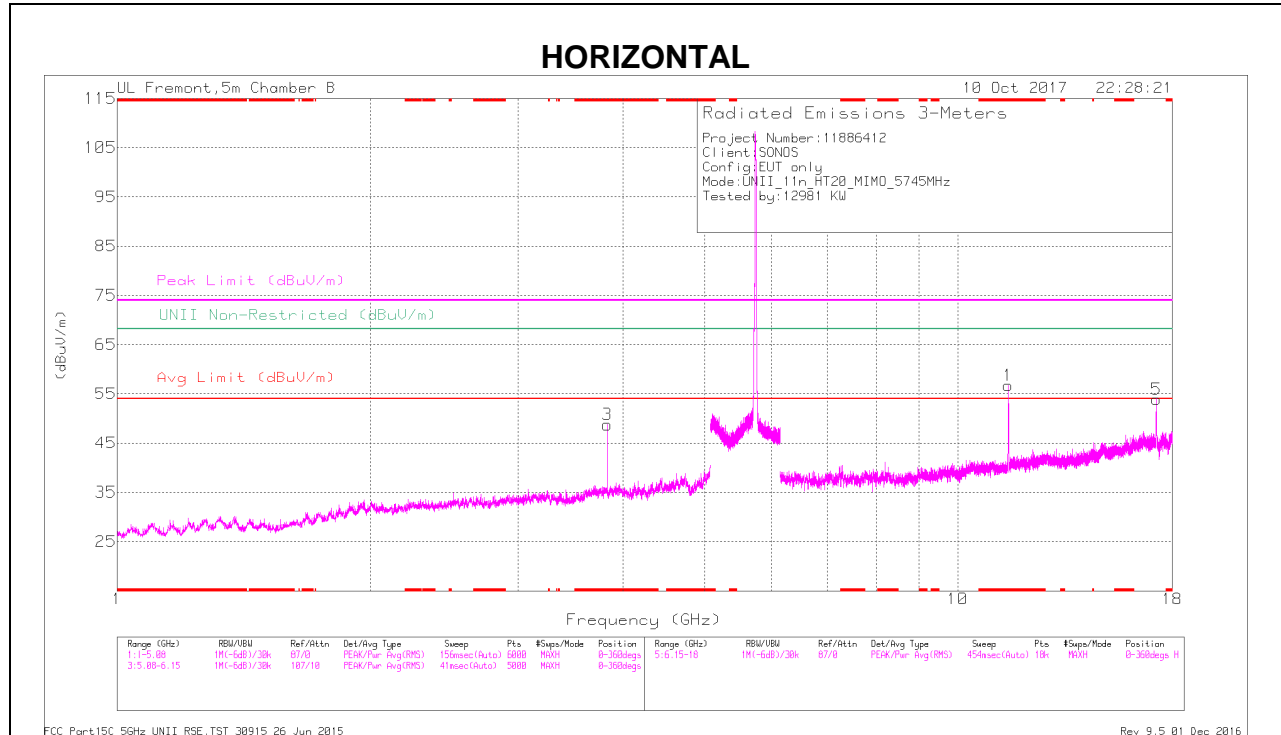


**RADIATED EMISSIONS**

Frequency (GHz)	Meter Reading (dBuV)	Det	AF TR63 (dB/m)	Amp/Cable/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.83	48.33	PK-U	33.5	-30.6	0	51.23	-	-	74	-22.77	-	-	47	223	H
* 3.83	45.27	ADR	33.5	-30.6	.56	48.73	54	-5.27	-	-	-	-	47	223	H
* 3.83	46.84	PK-U	33.5	-30.6	0	49.74	-	-	74	-24.26	-	-	311	276	V
* 3.83	42.67	ADR	33.5	-30.6	.56	46.13	54	-7.87	-	-	-	-	311	276	V
* 11.49	44.9	PK-U	38.1	-22.5	0	60.5	-	-	74	-13.5	-	-	49	211	H
* 11.49	33.97	ADR	38.1	-22.5	.56	50.13	54	-3.87	-	-	-	-	49	211	H
* 11.49	43.07	PK-U	38.1	-22.5	0	58.67	-	-	74	-15.33	-	-	354	102	V
* 11.49	32.07	ADR	38.1	-22.5	.56	48.23	54	-5.77	-	-	-	-	354	102	V
17.228	40.89	PK-U	41.6	-19.7	0	62.79	-	-	-	-	68.2	-5.41	54	397	V
17.235	40.05	PK-U	41.6	-19.6	0	62.05	-	-	-	-	68.2	-6.15	2	241	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK-U - U-NII: Maximum Peak  
 ADR - U-NII AD primary method, RMS average

### MID CHANNEL RESULTS

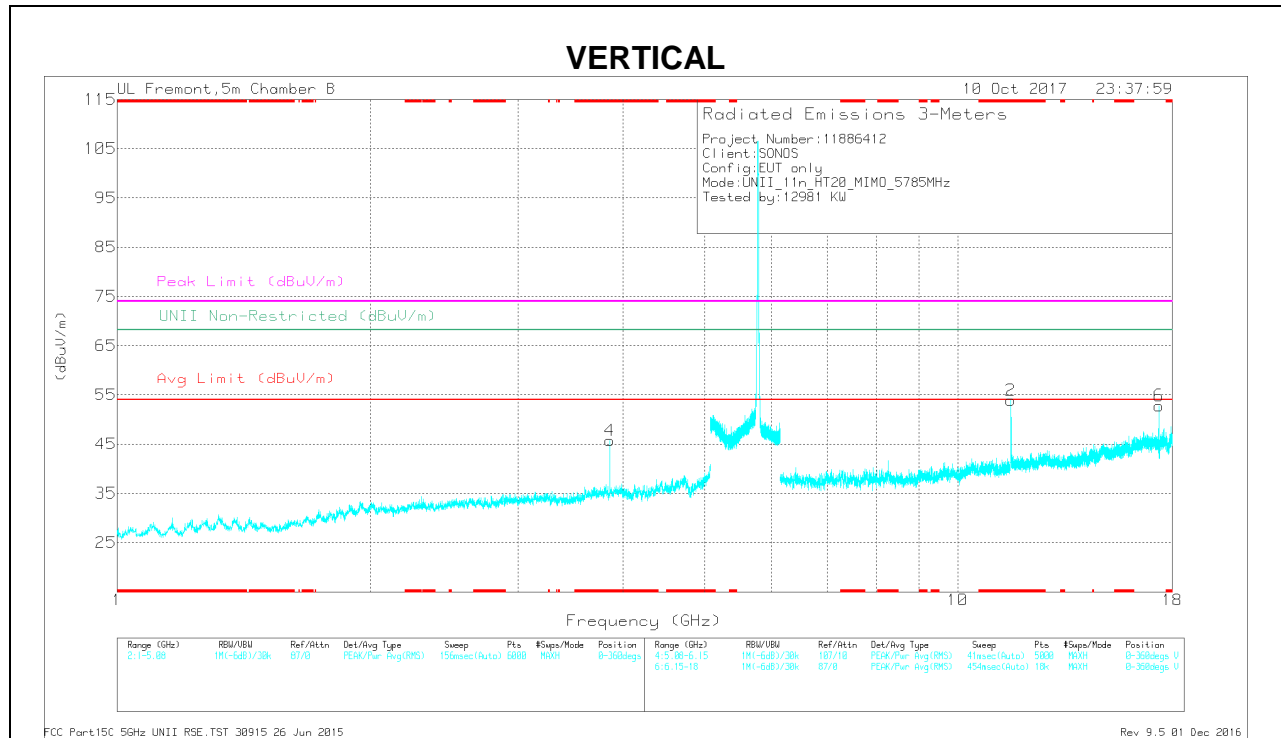
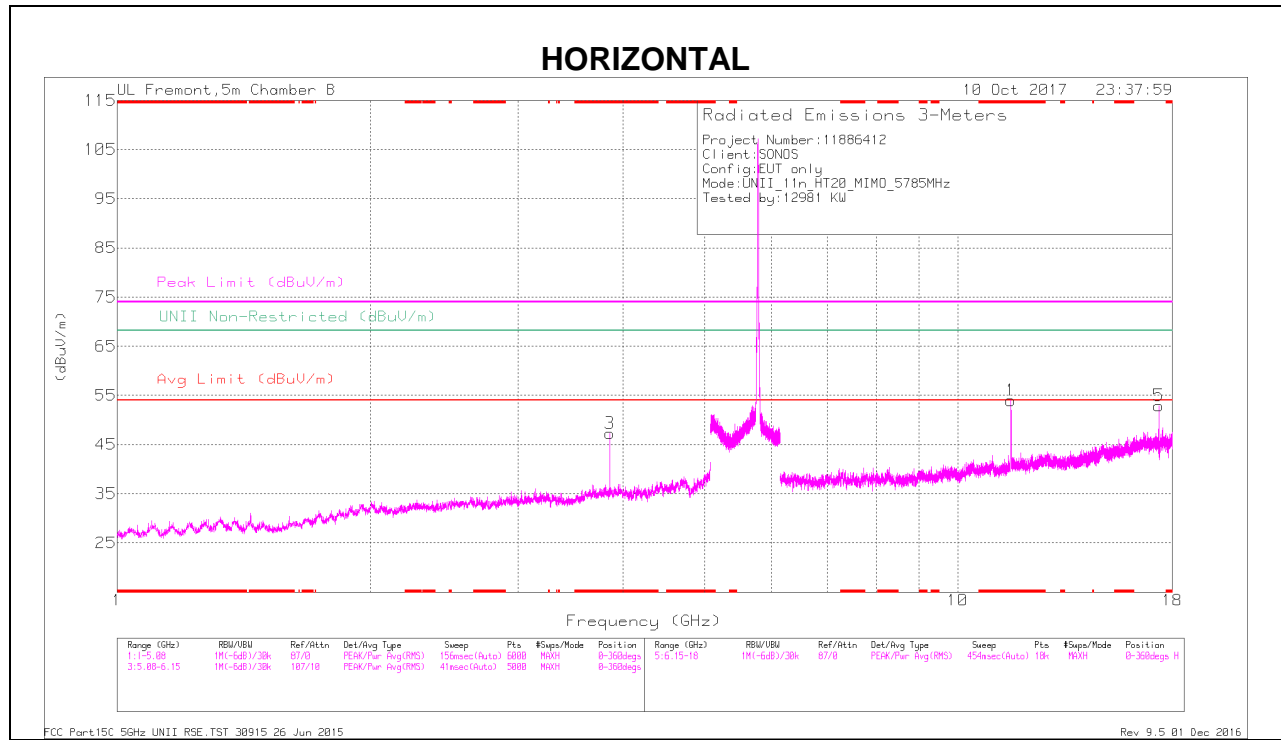


**RADIATED EMISSIONS**

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Chf/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.857	48.35	PK-U	33.5	-30.8	0	51.05	-	-	74	-22.95	-	-	52	231	H
* 3.857	45.22	ADR	33.5	-30.8	.56	48.48	54	-5.52	-	-	-	-	52	231	H
* 3.857	45.05	PK-U	33.5	-30.8	0	48.75	-	-	74	-25.25	-	-	235	115	V
* 3.857	41.67	ADR	33.5	-30.8	.56	44.93	54	-9.07	-	-	-	-	235	115	V
* 11.57	45.18	PK-U	38.2	-22.1	0	61.28	-	-	74	-12.72	-	-	29	114	H
* 11.57	34.03	ADR	38.2	-22.1	.56	50.69	54	-3.31	-	-	-	-	29	114	H
* 11.57	44.51	PK-U	38.2	-22.1	0	60.61	-	-	74	-13.39	-	-	107	354	V
* 11.57	31.82	ADR	38.2	-22.1	.56	48.48	54	-5.52	-	-	-	-	107	354	V
17.355	41.62	PK-U	41.6	-19.6	0	63.62	-	-	-	-	68.2	-4.58	54	384	V
17.356	36.64	PK-U	41.6	-19.6	0	56.64	-	-	-	-	68.2	-9.56	2	167	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK-U - U-NII: Maximum Peak  
 ADR - U-NII AD primary method, RMS average

### HIGH CHANNEL RESULTS

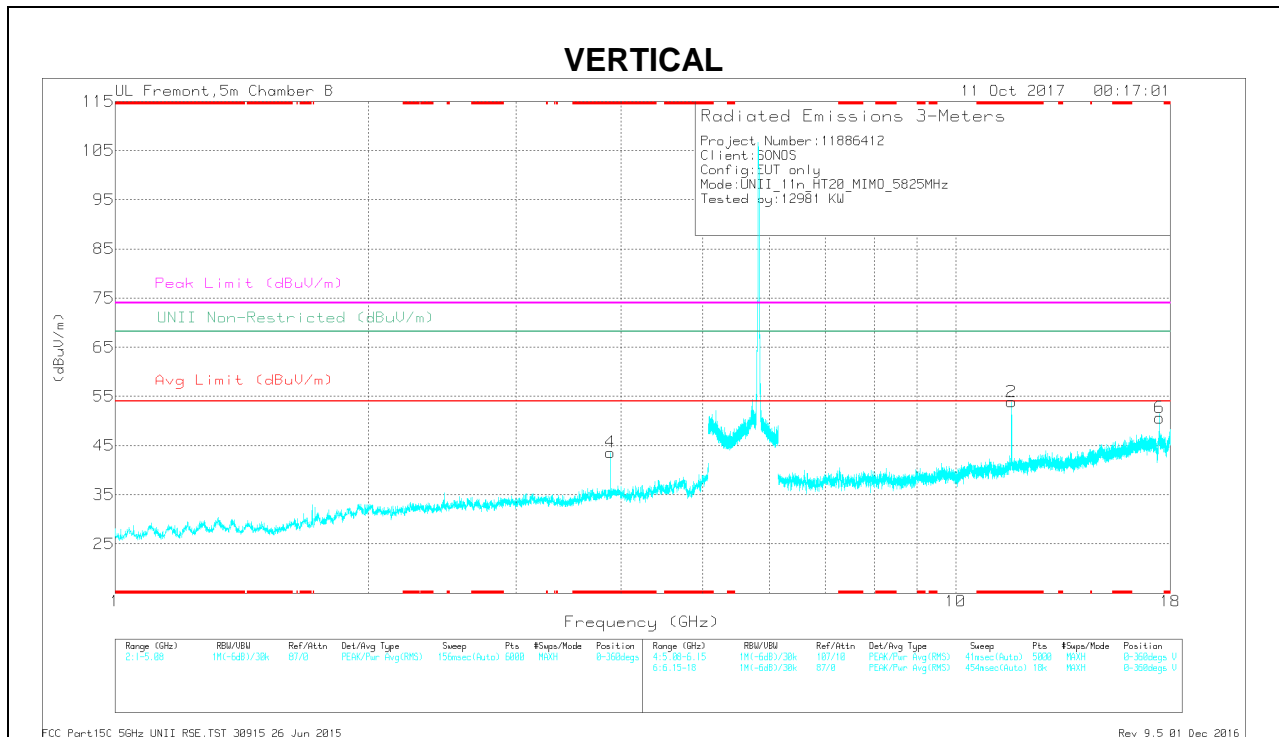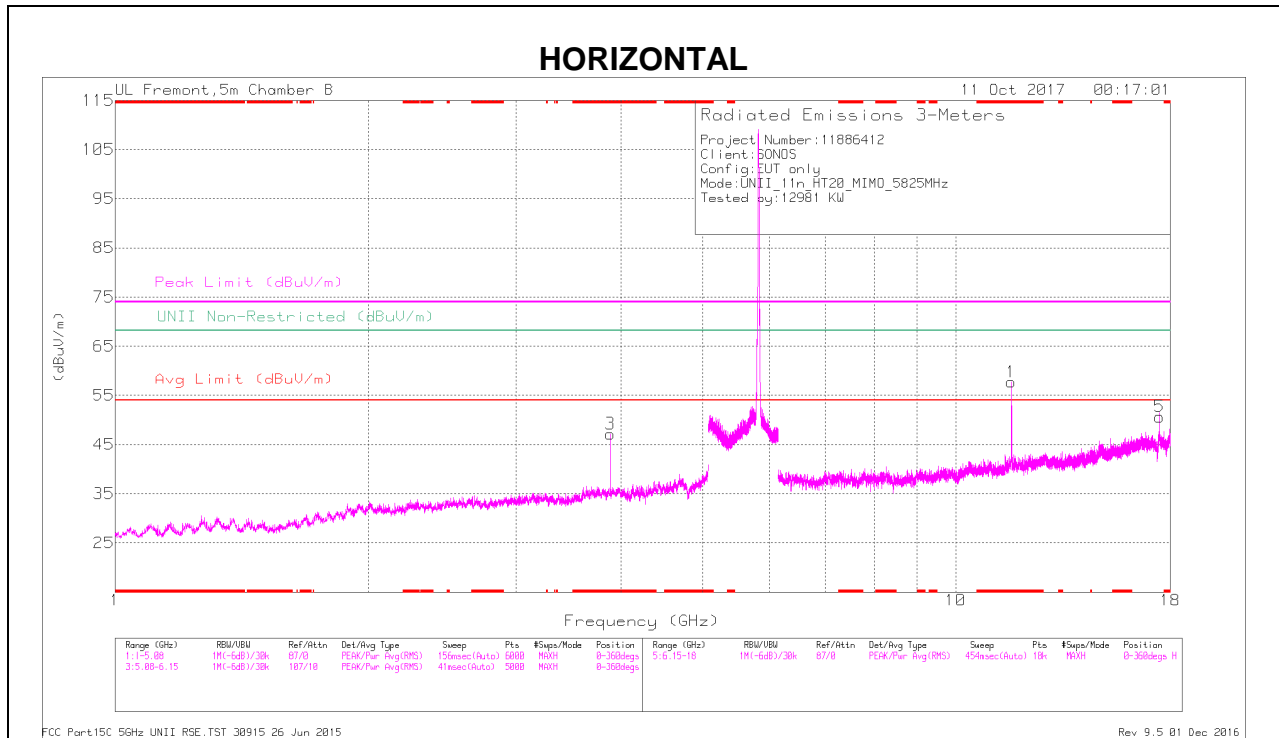





**RADIATED EMISSIONS**

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Chf/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.883	48.41	PK-U	33.5	-30.6	0	51.31	-	-	74	-22.69	-	-	48	210	H
* 3.883	44.9	ADR	33.5	-30.6	.56	48.36	54	-5.64	-	-	-	-	48	210	H
* 3.883	46.21	PK-U	33.5	-30.6	0	49.11	-	-	74	-24.89	-	-	236	106	V
* 3.883	41.64	ADR	33.5	-30.6	.56	45.1	54	-8.9	-	-	-	-	236	106	V
* 11.65	44.81	PK-U	38.3	-22.2	0	60.91	-	-	74	-13.09	-	-	60	380	H
* 11.65	31.88	ADR	38.3	-22.2	.56	48.54	54	-5.46	-	-	-	-	60	380	H
* 11.651	42.21	PK-U	38.3	-22.1	0	58.41	-	-	74	-15.59	-	-	357	102	V
* 11.65	30.03	ADR	38.3	-22.2	.56	46.69	54	-7.31	-	-	-	-	357	102	V
17.475	37.77	PK-U	41.7	-18.8	0	60.67	-	-	-	-	68.2	-7.53	0	260	H
17.475	37.43	PK-U	41.7	-18.8	0	60.33	-	-	-	-	68.2	-7.87	50	107	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK-U - U-NII: Maximum Peak  
 ADR - U-NII AD primary method, RMS average

## 7.2. Worst Case Below 1 GHz

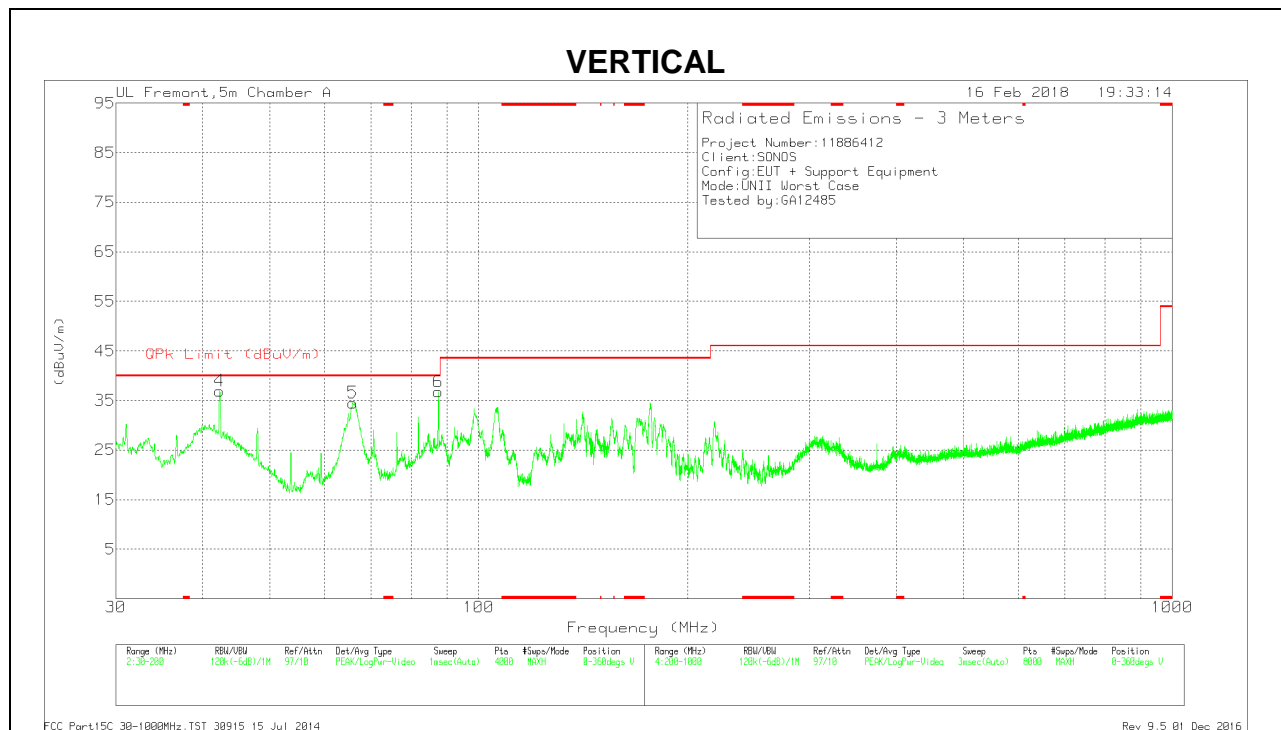
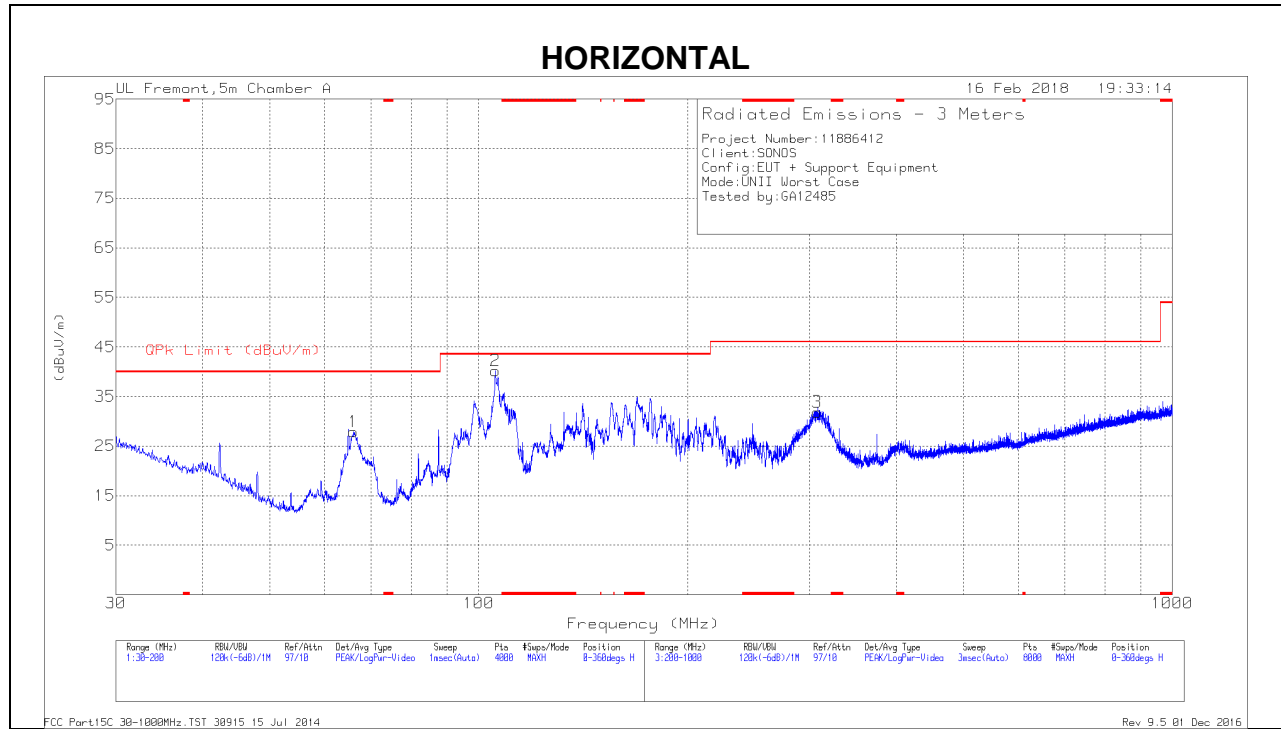


**Below 1GHz DATA**

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T130 (dB/m)	Amp/Cbl (dB/m)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	42.3378	36.54	Qp	16.2	-27.1	25.64	40	-14.36	208	400	V
5	65.9384	29.77	Qp	12.1	-26.8	15.07	40	-24.93	282	400	V
6	87.4917	39.82	Qp	11.4	-26.5	24.72	40	-15.28	311	400	V
2	105.7639	47.58	Qp	15.8	-26.3	37.08	43.52	-6.44	303	280	H
1	66.0068	42.64	Pk	12.1	-26.8	27.94	40	-12.06	0-360	300	H
3	307.614	38.88	Pk	17.6	-24.6	31.88	46.02	-14.14	0-360	101	H

Pk - Peak detector  
 Qp - Quasi-Peak detector

### 7.3. Worst Case 18-26 GHz

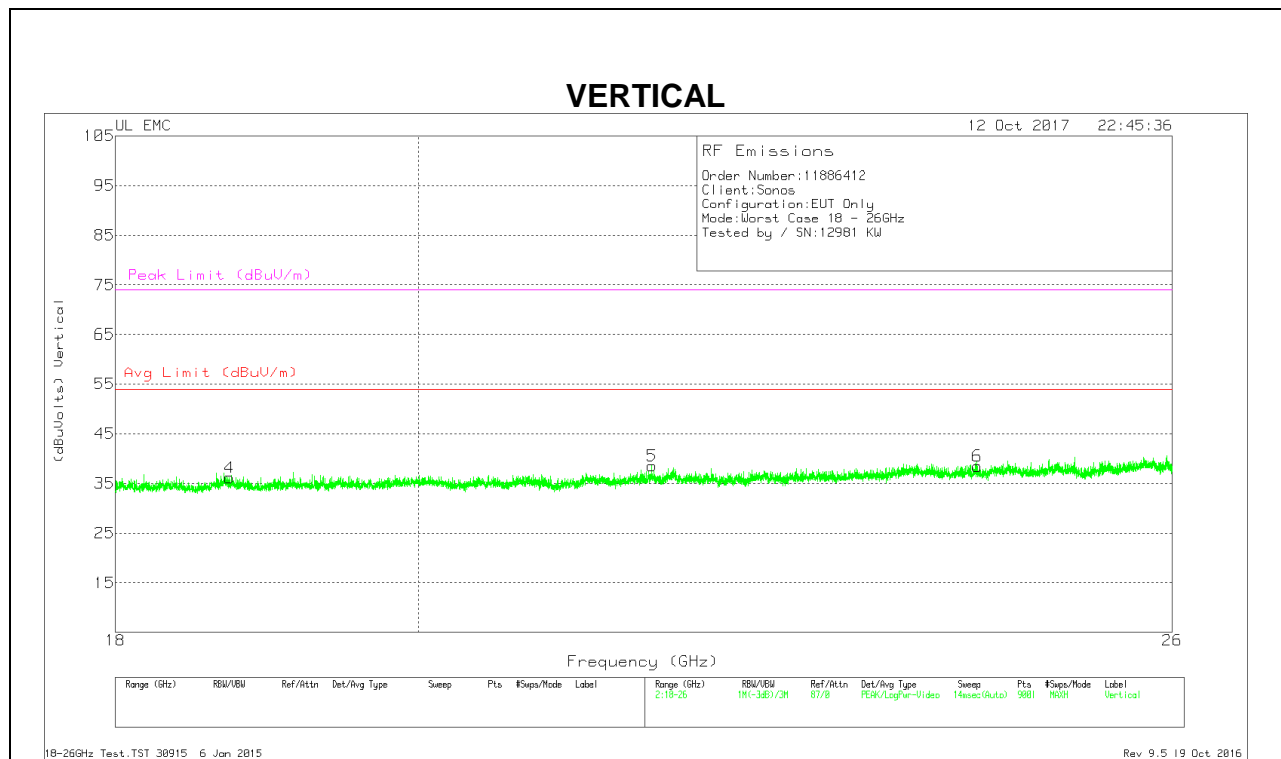
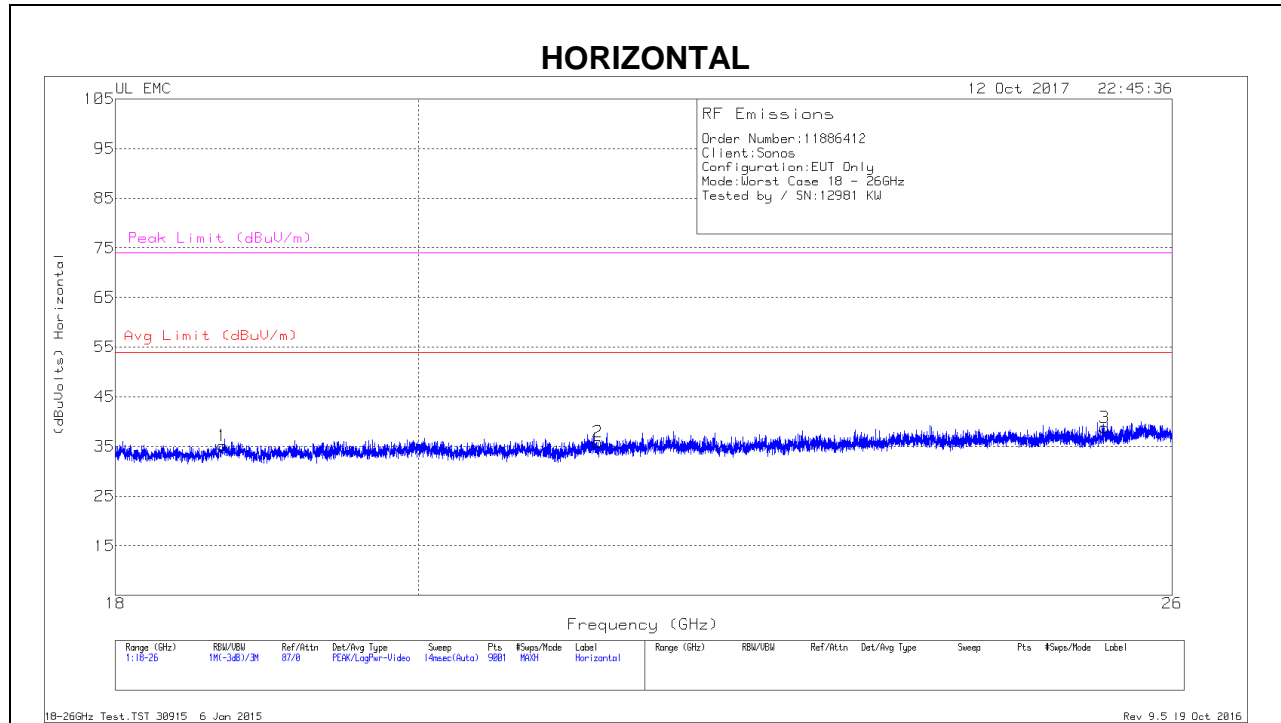


**18 – 26GHz DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	T89 AF (dB/m)	Amp/Cbl (dB)	Dist Corr (dB)	Corrected Reading (dBuVolts)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)
1	18.683	36.73	Pk	32.5	-24.5	-9.5	35.23	54	-18.77	74	-38.77
2	21.291	37.67	Pk	33.2	-25.5	-9.5	35.87	54	-18.13	74	-38.13
3	25.392	38.93	Pk	33.7	-24.3	-9.5	38.83	54	-15.17	74	-35.17
4	18.728	37.86	Pk	32.5	-24.7	-9.5	36.16	54	-17.84	74	-37.84
5	21.692	39.36	Pk	33.3	-24.6	-9.5	38.56	54	-15.44	74	-35.44
6	24.295	38.57	Pk	33.6	-24.2	-9.5	38.47	54	-15.53	74	-35.53

Pk - Peak detector

### 7.4. Worst Case 26-40 GHz

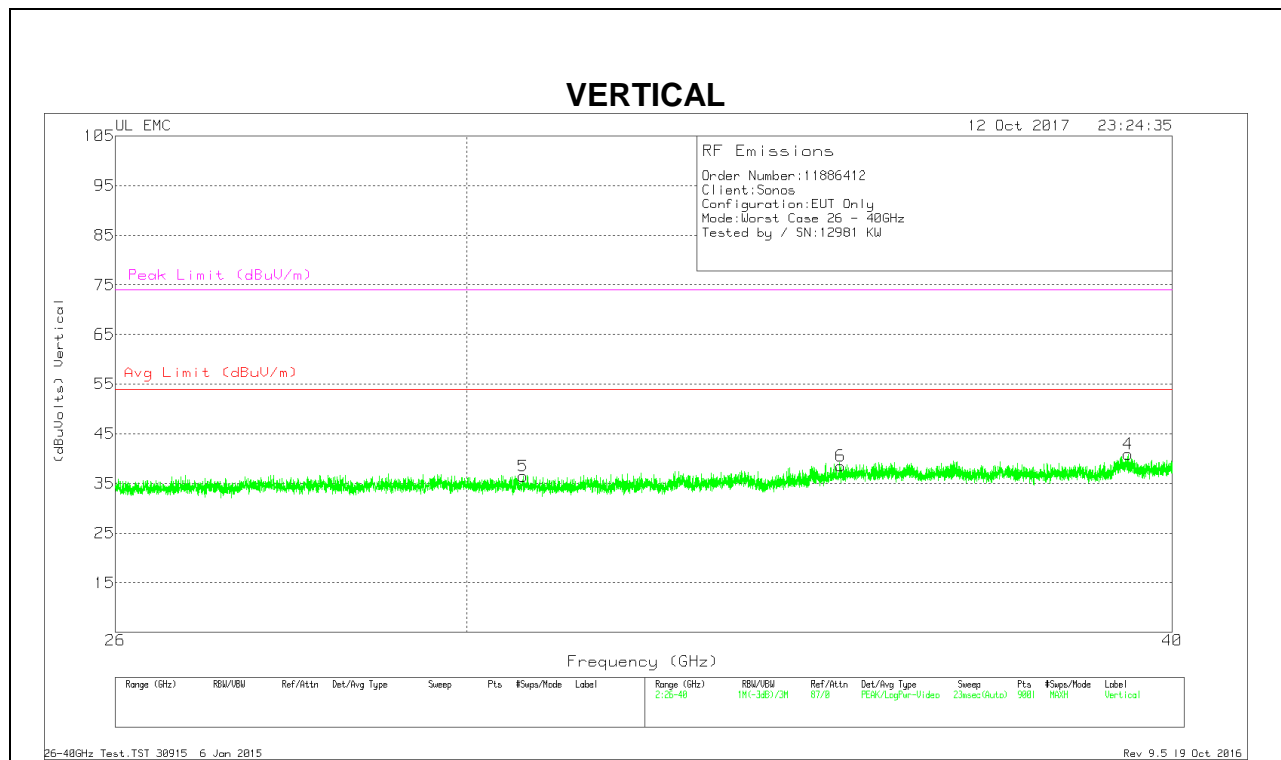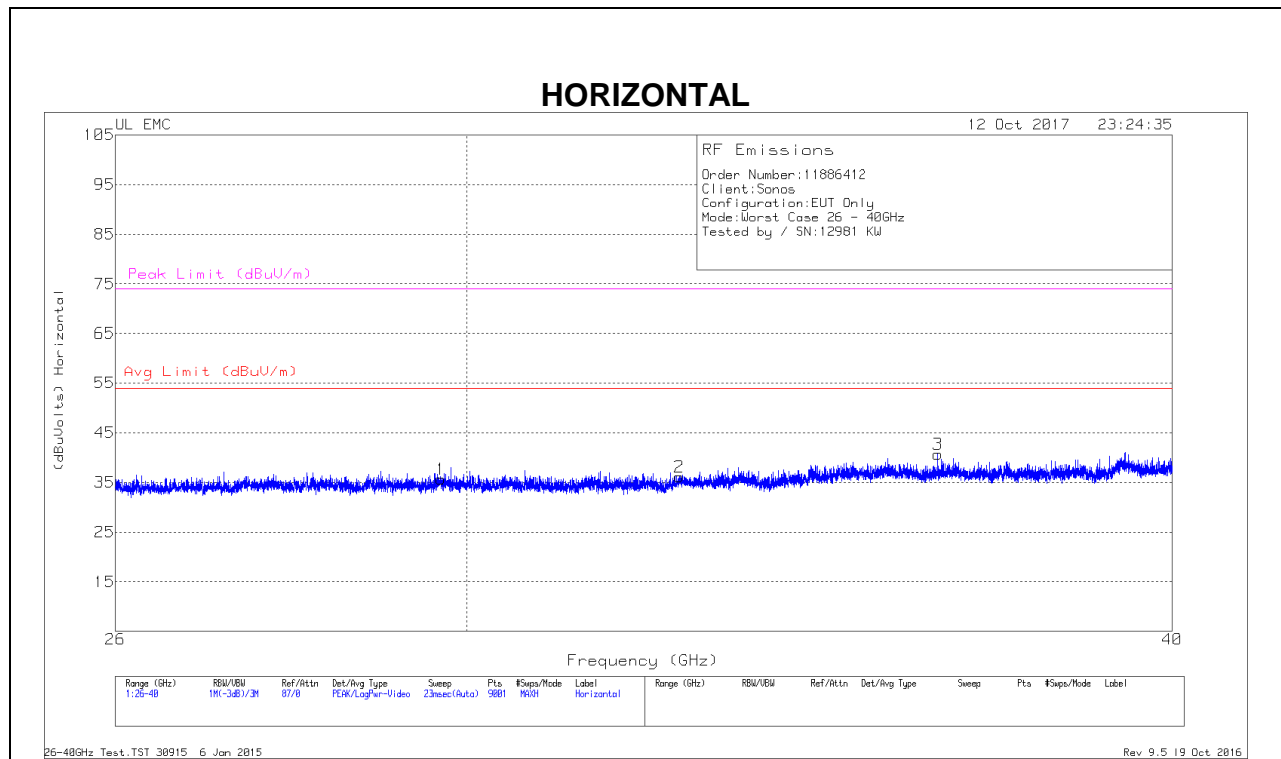


**26 – 40GHz DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	T90 AF (dB/m)	Amp/Cbl (dB)	Dist Corr (dB)	DC Corr (dB)	Corrected Reading (dBuVolts)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)
1	29.69	40.18	Pk	36	-31	-9.5	0	35.68	54	-18.32	74	-38.32
2	32.718	41.25	Pk	36.5	-32.1	-9.5	0	36.15	54	-17.85	74	-37.85
3	36.351	43.99	Pk	37.2	-31	-9.5	0	40.69	54	-13.31	74	-33.31
4	39.283	42.58	Pk	38.4	-30.6	-9.5	0	40.88	54	-13.12	74	-33.12
5	30.701	41.37	Pk	36.1	-31.5	-9.5	0	36.47	54	-17.53	74	-37.53
6	34.941	42.32	Pk	37.2	-31.5	-9.5	0	38.52	54	-15.48	74	-35.48

Pk - Peak detector

### 7.5. Worst Case 9 kHz - 30 MHz

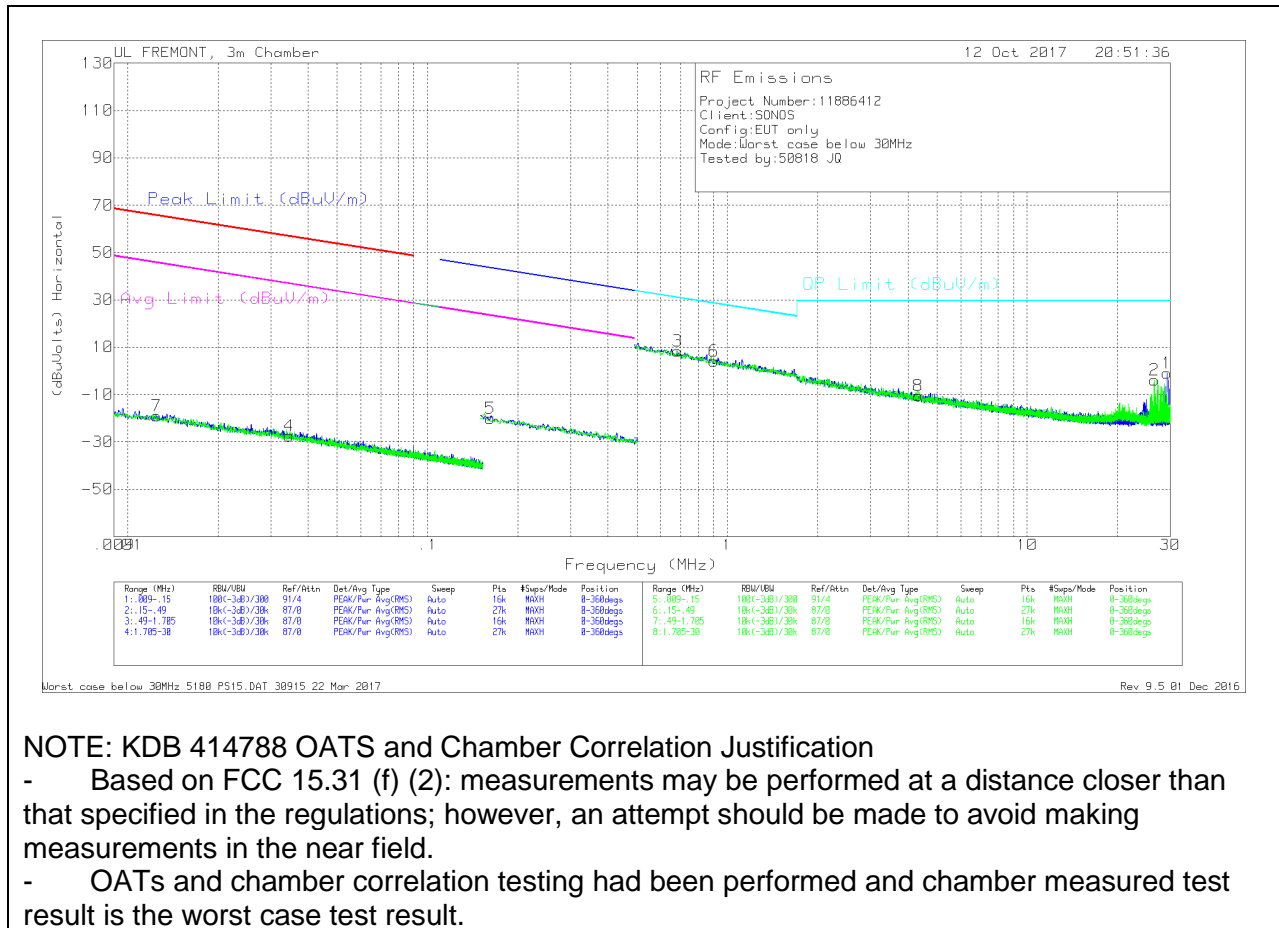

**NOTE: KDB 414788 OATS and Chamber Correlation Justification**

- Based on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.
- OATs and chamber correlation testing had been performed and chamber measured test result is the worst case test result.



**9 KHz – 30 MHz DATA**



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Cbl (dB)	Dist Corr 300m	Corrected Reading (dBuVolts)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
7	.01246	41.99	Pk	17.5	1.4	-80	-19.11	65.67	-84.78	45.67	-64.78	-	-	-	-	0-360
4	.03464	37.8	Pk	13.3	1.4	-80	-27.5	56.79	-84.29	36.79	-64.29	-	-	-	-	0-360
5	.1616	46.7	Pk	11.6	1.5	-80	-20.2	-	-	-	-	43.45	-63.65	23.45	-43.65	0-360

Pk - Peak detector

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Cbl (dB)	Dist Corr (dB) 40Log	Corrected Reading (dBuVolts)	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
3	.68053	35.27	Pk	11.6	1.5	-40	8.57	30.96	-22.59	0-360
6	.90192	30.94	Pk	11.6	1.5	-40	4.04	28.52	-24.48	0-360
8	4.33338	16.61	Pk	11.4	1.5	-40	-10.49	29.5	-39.99	0-360
2	26.60862	25.52	Pk	8.8	1.7	-40	-3.98	29.5	-33.48	0-360
1	29.2695	28.67	Pk	8.6	1.7	-40	-1.03	29.5	-30.53	0-360

Pk - Peak detector

### 7.6. WORST-CASE SIMULTANEOUS TRANSMISSION

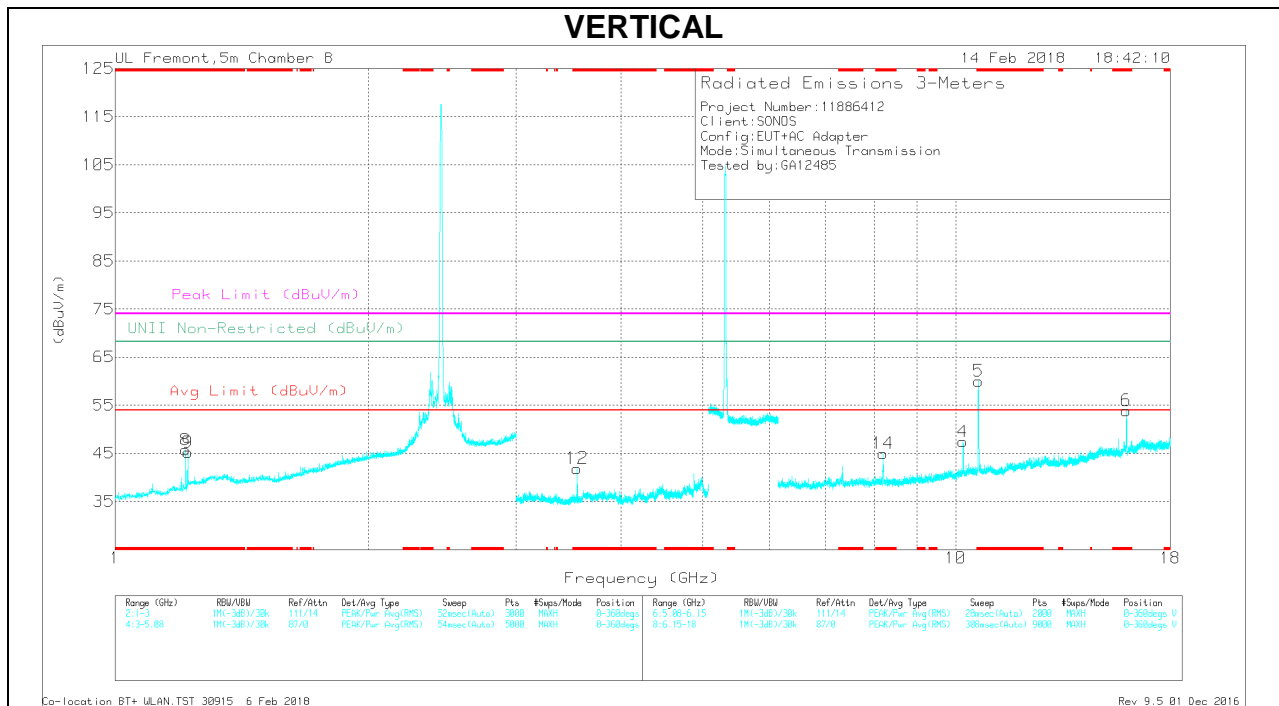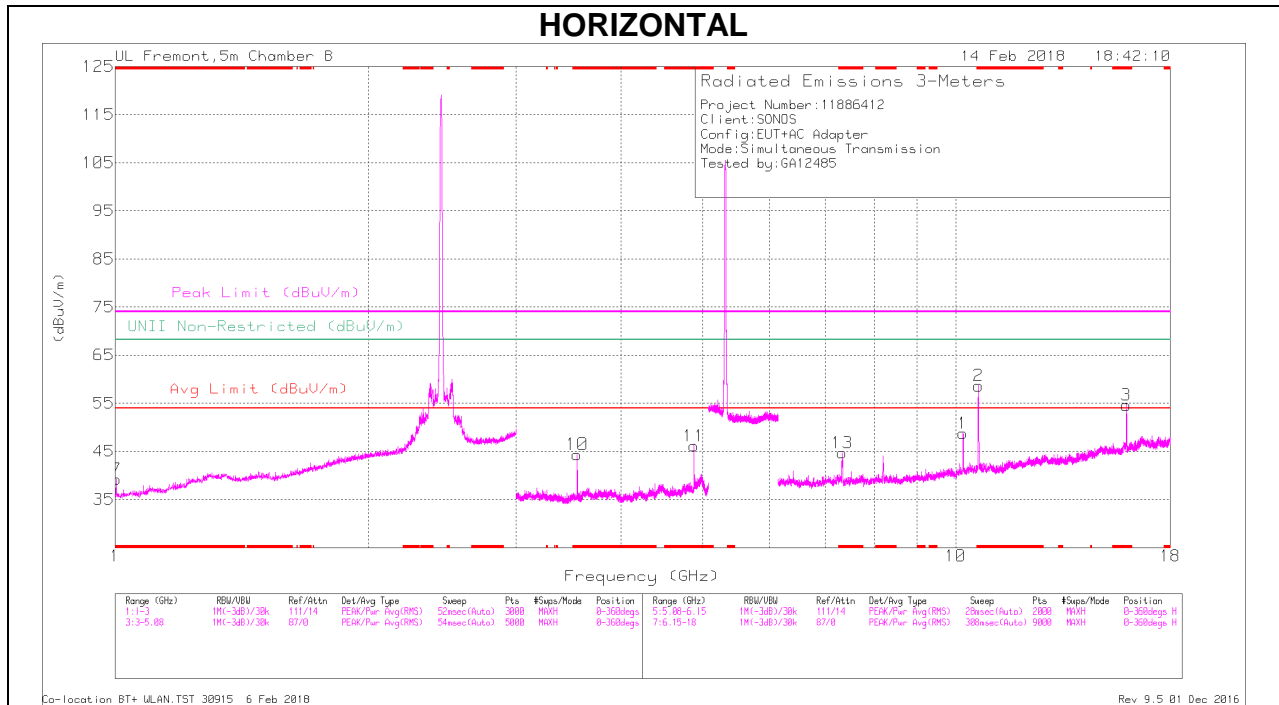

**SIMULTANEOUS TRANSMISSION DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
7	* 1.002	39.72	PK2	27.5	-23.7	0	43.52	-	-	74	-30.48	-	-	24	340	H
	* 1.004	27.67	MAv1	27.5	-23.6	.56	32.13	54	-21.87	-	-	-	-	24	340	H
8	* 1.211	39.51	PK2	28.2	-22.8	0	44.91	-	-	74	-29.09	-	-	179	342	H
	* 1.214	27.59	MAv1	28.2	-22.9	.56	33.45	54	-20.55	-	-	-	-	179	342	H
9	* 1.222	39.69	PK2	28.3	-22.2	0	45.79	-	-	74	-28.21	-	-	22	378	H
	* 1.223	27.75	MAv1	28.3	-22.2	.56	34.41	54	-19.59	-	-	-	-	22	378	H
10	* 3.547	47.91	PK2	33	-31.7	0	49.21	-	-	74	-24.79	-	-	135	320	H
	* 3.547	41.5	MAv1	33	-31.7	.56	43.36	54	-10.64	-	-	-	-	135	320	H
11	* 4.884	47.31	PK2	34.4	-31.3	0	50.41	-	-	74	-23.59	-	-	162	254	H
	* 4.884	40.18	MAv1	34.4	-31.3	.56	43.84	54	-10.16	-	-	-	-	162	254	H
12	* 3.546	47.27	PK2	33	-31.7	0	48.57	-	-	74	-25.43	-	-	283	191	H
	* 3.547	40.12	MAv1	33	-31.7	.56	41.98	54	-12.02	-	-	-	-	283	191	H
2	* 10.64	51.07	PK-U	37.6	-24.1	0	64.57	-	-	74	-9.43	-	-	118	400	H
	* 10.64	39.93	ADR	37.6	-24.1	.56	53.99	54	-0.01	-	-	-	-	118	400	H
3	* 15.96	46.55	PK-U	41.1	-22	0	65.65	-	-	74	-8.35	-	-	135	168	H
	* 15.96	32.78	ADR	41.1	-22	.56	52.44	54	-1.56	-	-	-	-	135	168	H
13	* 7.326	44.1	PK2	35.9	-28.1	0	51.9	-	-	74	-22.1	-	-	281	385	H
	* 7.327	30.06	MAv1	35.9	-28.1	.56	38.42	54	-15.58	-	-	-	-	281	385	H
5	* 10.64	51.36	PK-U	37.6	-24.1	0	64.86	-	-	74	-9.14	-	-	118	399	H
	* 10.64	40.35	ADR	37.6	-24.1	.56	53.41	54	-0.59	-	-	-	-	118	399	H
6	* 15.96	45.74	PK-U	41.1	-22	0	64.84	-	-	74	-9.16	-	-	131	102	H
	* 15.959	31.29	ADR	41.1	-22	.56	50.95	54	-3.05	-	-	-	-	131	102	H
14	* 8.196	42.68	PK2	36	-27.9	0	50.78	-	-	74	-23.22	-	-	330	233	H
	* 8.196	28.77	MAv1	36	-27.9	.56	37.43	54	-16.57	-	-	-	-	330	233	H
1	10.203	47.4	PK-U	37.4	-25.5	0	59.3	-	-	74	-14.7	68.2	-8.9	128	198	H
4	10.203	48.66	PK-U	37.4	-25.5	0	60.56	-	-	74	-13.44	68.2	-7.64	124	201	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK2 - KDB558074 Method: Maximum Peak  
 MAv1 - KDB558074 Option 1 Maximum RMS Average  
 PK-U - U-NII: Maximum Peak  
 ADR - U-NII AD primary method, RMS average

## 8. ART POWER SETTINGS TABLE FOR CONDUCTED AND RADIATED MEASUREMENTS

### 8.1. CONDUCTED OUTPUT POWER SETTING FOR 4x4:

ART POWER SETTINGS								
Band	Mode	Channel	Frequency (MHz)	Power Setting	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Chain 2 Output Power (dBm)	Chain 3 Output Power (dBm)
5.2	11n HT20	36	5180	13	13.58	13.41	14.04	13.81
		40	5200	13	13.42	13.32	13.95	13.66
		48	5240	13	13.14	13.33	14.1	13.23
5.3	11n HT20	52	5260	13	13.15	13.41	14.37	13.24
		60	5300	13	12.85	13.11	14.00	13.06
		64	5320	12	11.12	11.59	11.41	11.02
5.6	11n HT20	100	5500	13	12.94	12.84	13.42	12.83
		116	5580	13	13.45	12.98	13.86	13.22
		140	5700	13	13.01	12.43	13.08	13.15
5.8	11n HT20	149	5745	15	15.23	15.11	15.34	15.23
		157	5785	15	15.25	15	15.14	15.23
		165	5825	15	15.92	14.44	15.17	15.23

Note: ART power settings in the report per client requested are for future reference.

**8.2. RADIATED BANDEDGE POWER SETTING FOR 4x4:**

Channel	Frequency (MHz)	11n-HT20	11n-HT20
		FCC Radiated BE Power Setting	IC Radiated BE Power Setting
<b>5150 - 5350MHz</b>			
36	5180	15.00	15.00
64	5320	15.00	15.00
<b>5470 - 5725MHz</b>			
100	5500	15.00	15.00
140	5700	14.00	14.00
<b>5725 - 5850MHz</b>			
149	5745	15.00	15.00
165	5825	15.00	15.00

Note: ART power settings in the report per client requested are for future reference.

## 9. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

### TEST PROCEDURE


The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

### RESULTS


### LINE 1 RESULTS

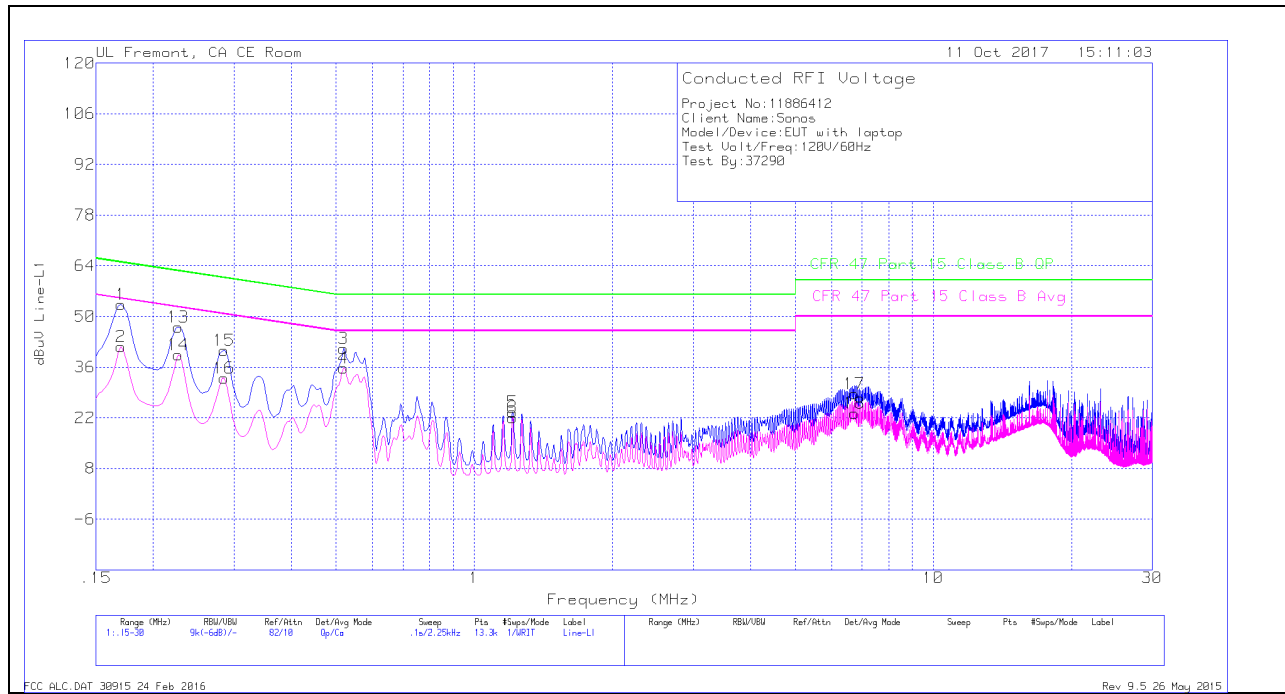

Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L1	LC Cables C1&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
1	.17025	43.23	Qp	0	0	10.1	53.33	64.95	-11.62	-	-
2	.17025	31.56	Ca	0	0	10.1	41.66	-	-	54.95	-13.29
3	.519	31.09	Qp	0	0	10.1	41.19	56	-14.81	-	-
4	.519	25.63	Ca	0	0	10.1	35.73	-	-	46	-10.27
5	1.212	13.41	Qp	0	.1	10.1	23.61	56	-32.39	-	-
6	1.212	11.9	Ca	0	.1	10.1	22.1	-	-	46	-23.9
13	.2265	36.88	Qp	0	0	10.1	46.98	62.58	-15.6	-	-
14	.2265	29.3	Ca	0	0	10.1	39.4	-	-	52.58	-13.18
15	.285	30.5	Qp	0	0	10.1	40.6	60.67	-20.07	-	-
16	.285	22.88	Ca	0	0	10.1	32.98	-	-	50.67	-17.69
17	6.74025	18.29	Qp	0	.2	10.2	28.69	60	-31.31	-	-
18	6.74025	12.88	Ca	0	.2	10.2	23.28	-	-	50	-26.72

Qp - Quasi-Peak detector  
 Ca - CISPR average detection

### LINE 2 RESULTS

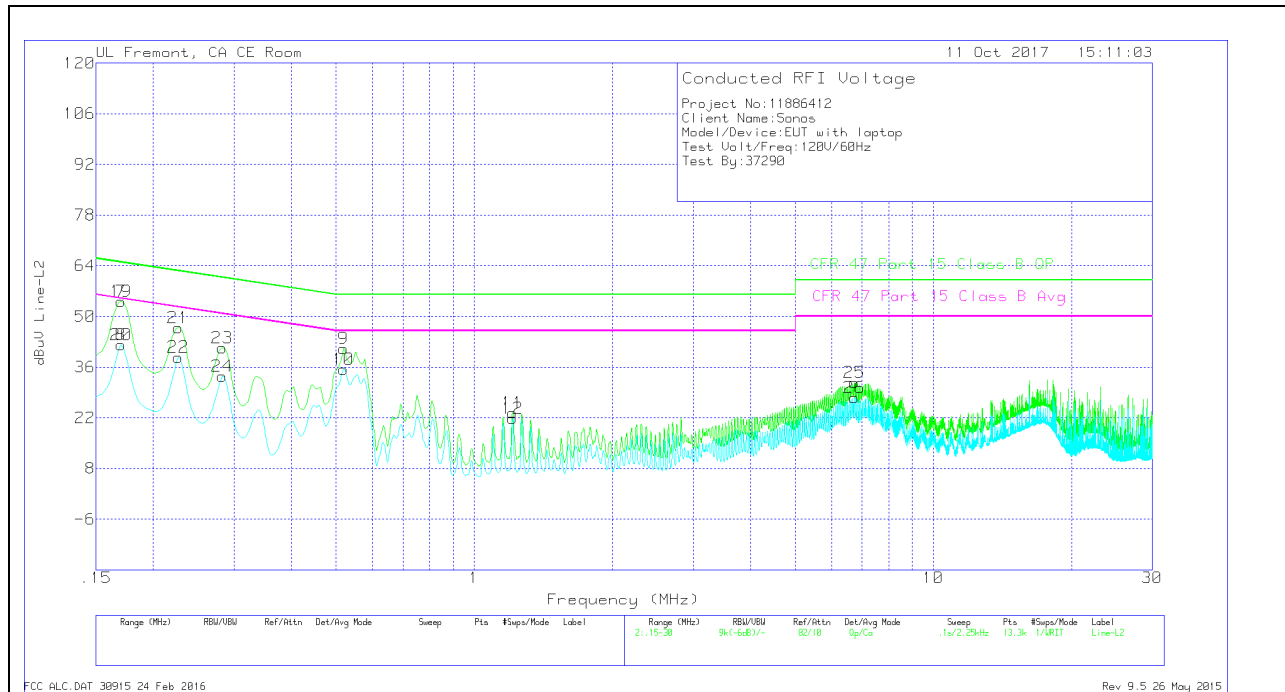

Range 2: Line-L2 .15 - 30MHz											
Marker	Frequenc y (MHz)	Meter Reading (dBuV)	Det	LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR )Margin (dB)
7	.17025	44.11	Qp	0	0	10.1	54.21	64.95	-10.74	-	-
8	.17025	32.13	Ca	0	0	10.1	42.23	-	-	54.95	-12.72
9	.519	31.03	Qp	0	0	10.1	41.13	56	-14.87	-	-
10	.519	25.36	Ca	0	0	10.1	35.46	-	-	46	-10.54
11	1.212	13.25	Qp	0	.1	10.1	23.45	56	-32.55	-	-
12	1.212	11.63	Ca	0	.1	10.1	21.83	-	-	46	-24.17
19	.17025	44.11	Qp	0	0	10.1	54.21	64.95	-10.74	-	-
20	.17025	32.13	Ca	0	0	10.1	42.23	-	-	54.95	-12.72
21	.2265	36.82	Qp	0	0	10.1	46.92	62.58	-15.66	-	-
22	.2265	28.68	Ca	0	0	10.1	38.78	-	-	52.58	-13.8
23	.28275	31.21	Qp	0	0	10.1	41.31	60.73	-19.42	-	-
24	.28275	23.39	Ca	0	0	10.1	33.49	-	-	50.73	-17.24
25	6.729	21.33	Qp	0	.2	10.2	31.73	60	-28.27	-	-
26	6.729	17.12	Ca	0	.2	10.2	27.52	-	-	50	-22.48

Qp - Quasi-Peak detector  
 Ca - CISPR average detection