



LOW CHANNEL 2

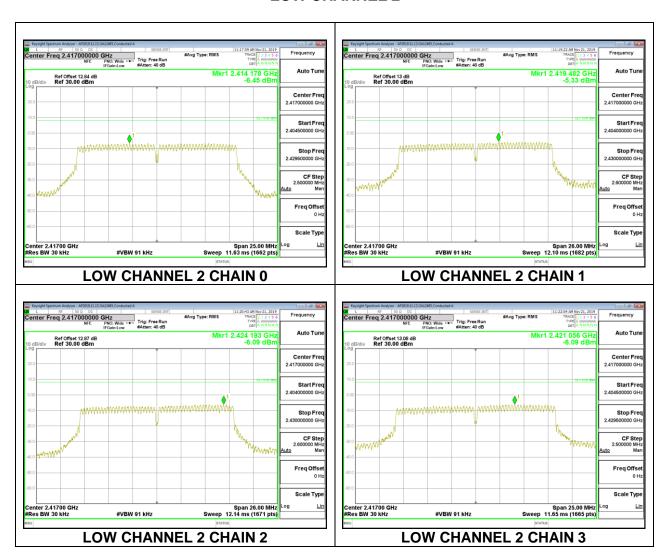


MID CHANNEL 6

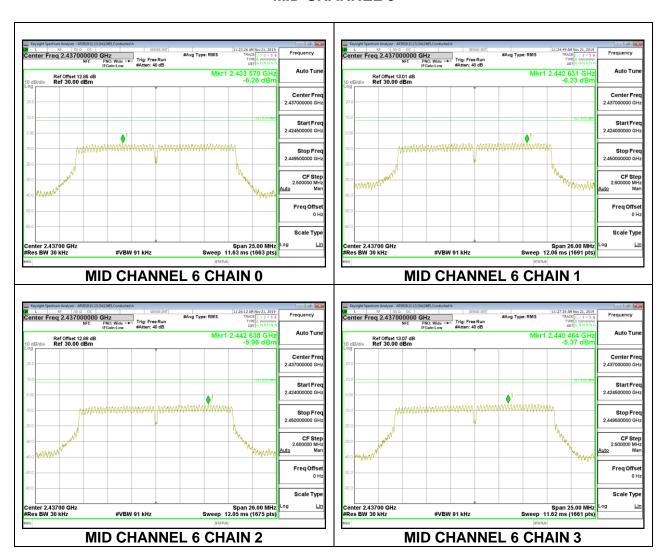

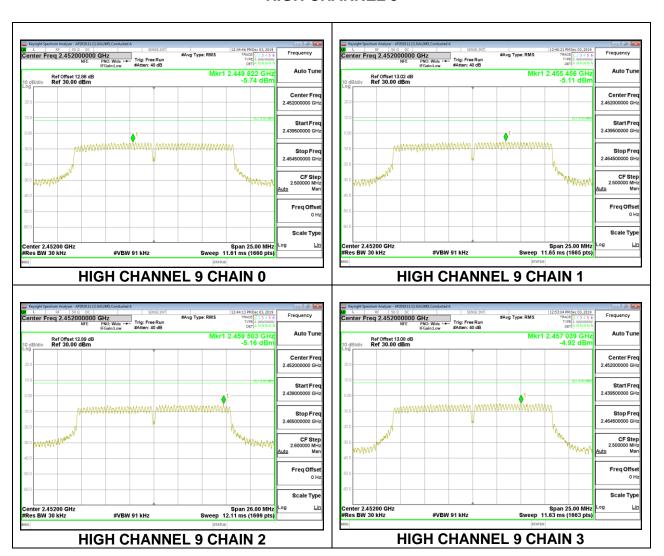

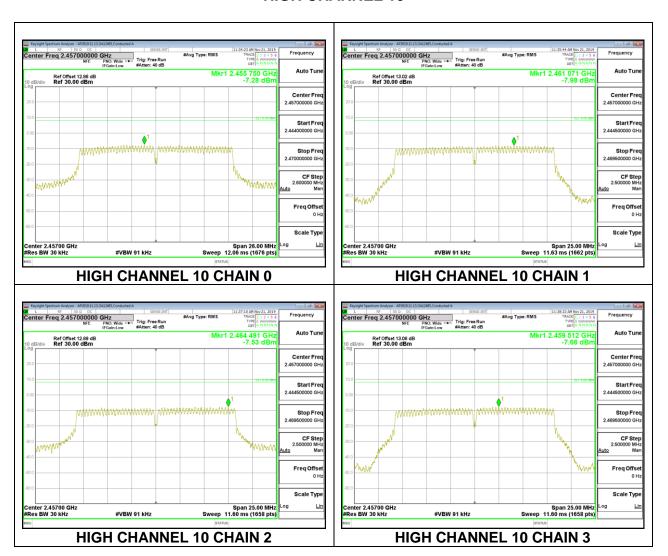

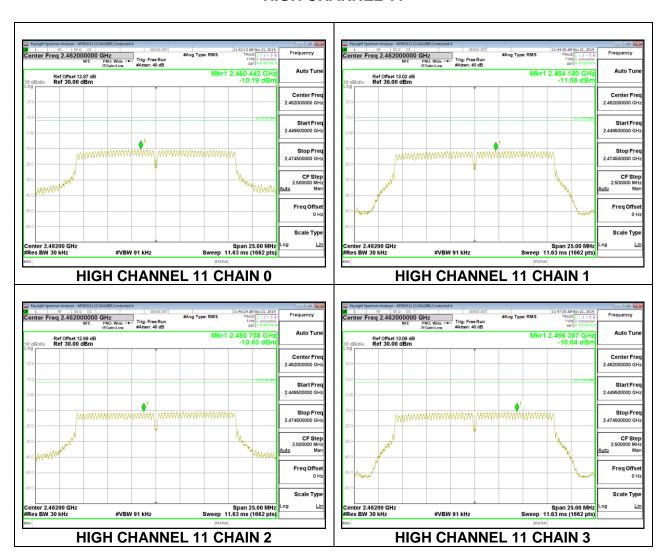


8.5.3. 802.11n HT20 MODE


4TX Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4 CDD MODE

Duty Cycle CF (dB) 0.0		0.09	Included in Calculations of Corr'd PSD					
PSD Results								
Channel	Frequency	Chain 0	Chain 1	Chain 2	Chain 3	Total	Limit	Margin
		Meas	Meas	Meas	Meas	Corr'd		
						PSD		
	(MHz)	(dBm/	(dBm/	(dBm/	(dBm/	(dBm/	(dBm/	
		3kHz)	3kHz)	3kHz)	3kHz)	3kHz)	3kHz)	(dB)
Low 1	2412	-9.45	-8.93	-9.05	-9.15	-3.03	8.0	-11.0
Low 2	2417	-6.89	-6.24	-6.84	-6.34	-0.46	8.0	-8.5
Mid 6	2437	-6.56	-5.81	-5.78	-5.48	0.22	8.0	-7.8
High 10	2457	-7.01	-6.62	-7.14	-6.44	-0.68	8.0	-8.7
High 11	2462	-9.04	-9.04	-9.37	-9.30	-3.07	8.0	-11.1


LOW CHANNEL 1

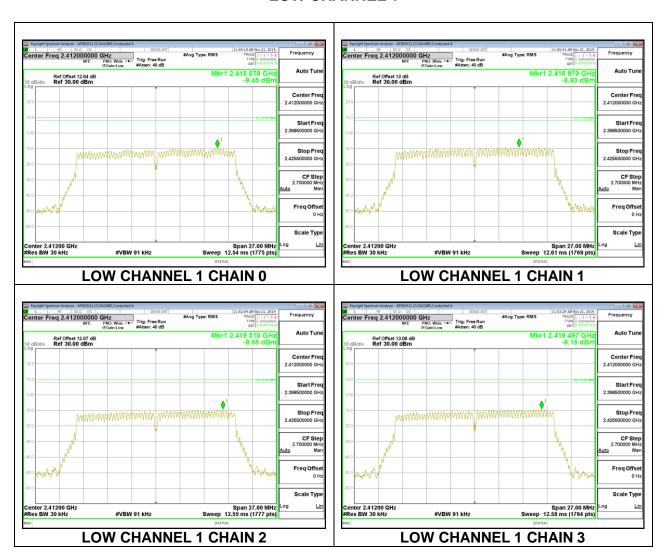



LOW CHANNEL 2

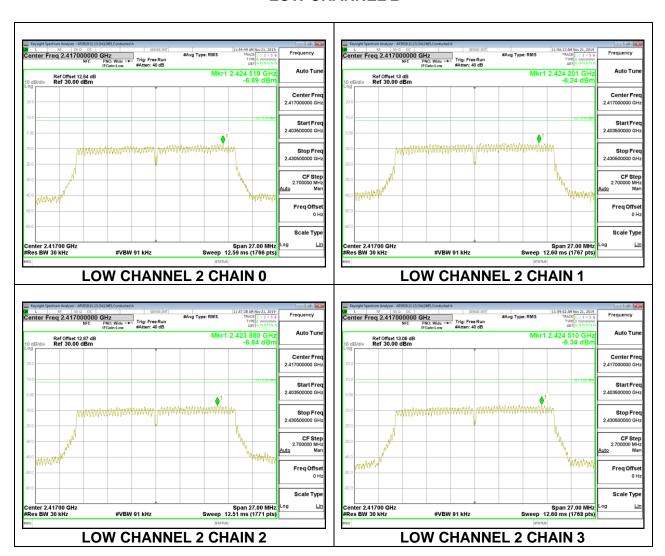

MID CHANNEL 6

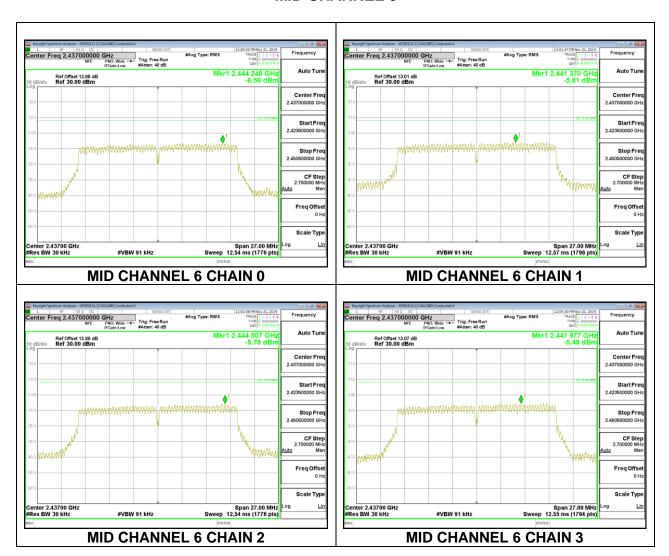

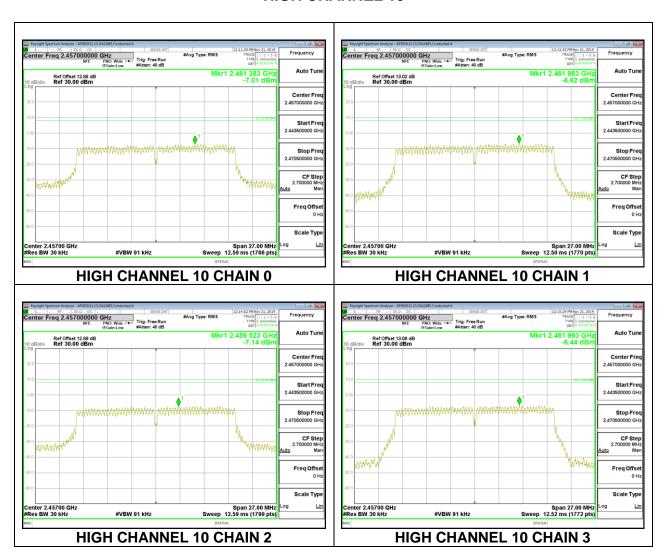

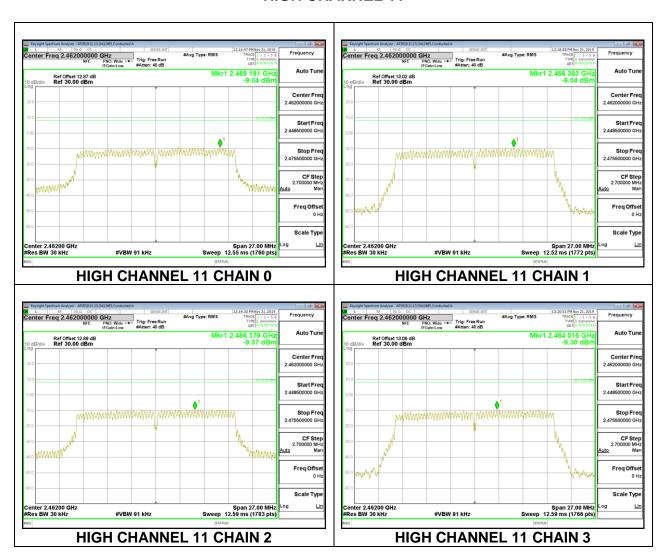

8.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)


RSS-247 5.5

Output power was measured based on the use of average measurement, therefore the required attenuation is 30 dB.

RESULTS

8.6.1. 802.11b MODE

4TX Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4 CDD MODE

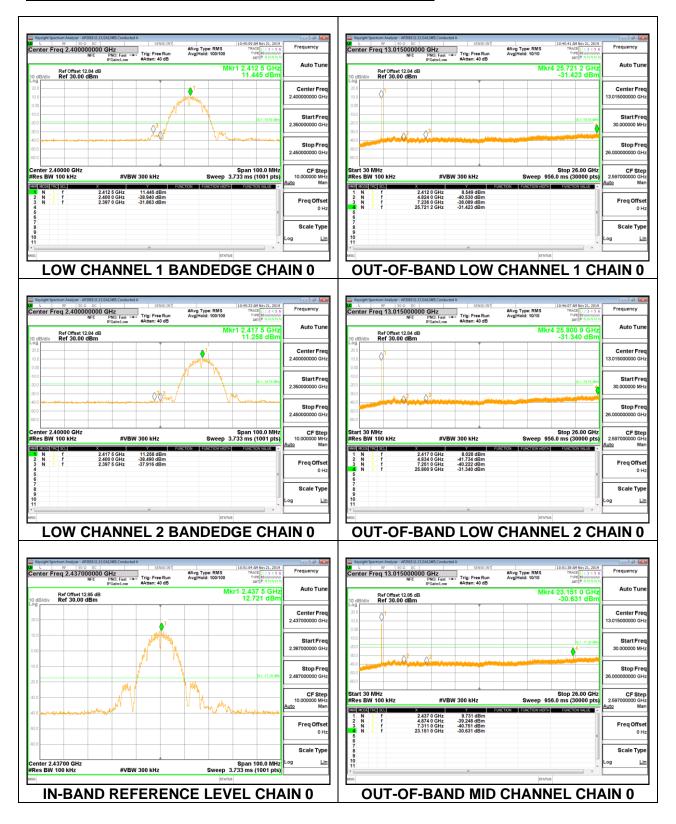

HIGH CHANNEL 11 BANDEDGE CHAIN 0

OUT-OF-BAND HIGH CHANNEL 11 CHAIN 0

DATE: 1/30/2020

DATE: 1/30/2020

HIGH CHANNEL 11 BANDEDGE CHAIN 1

OUT-OF-BAND HIGH CHANNEL 11 CHAIN 1

DATE: 1/30/2020

DATE: 1/30/2020

HIGH CHANNEL 11 BANDEDGE CHAIN 2

OUT-OF-BAND HIGH CHANNEL 11 CHAIN 2

DATE: 1/30/2020