

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB)	Amp/Cbl/Filtr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.434601	44.48	PK-U	28.6	-32.7	0	40.38	-	-	-	-	68.2	-27.82	354	113	H
2	* 1.439688	49.98	PK-U	28.4	-32.6	0	45.78	-	-	74	-28.22	-	-	159	151	V
	* 1.439832	32.03	ADR	28.4	-32.6	1.97	29.8	54	-24.2	-	-	-	-	159	151	V
3	* 11.472477	43.78	PK-U	38.7	-18.7	0	63.78	-	-	74	-10.22	-	-	60	102	H
	* 11.472389	25.68	ADR	38.7	-18.7	1.97	47.65	54	-6.35	-	-	-	-	60	102	H
4	17.210267	40.86	PK-U	41.6	-15.6	0	66.86	-	-	-	-	68.2	-1.34	234	247	H
	* 11.471866	42.61	PK-U	38.7	-18.7	0	62.61	-	-	74	-11.39	-	-	276	102	V
	* 11.47366	26.09	ADR	38.7	-18.7	1.97	48.06	54	-5.94	-	-	-	-	276	102	V
6	17.209378	38.98	PK-U	41.6	-15.6	0	64.98	-	-	-	-	68.2	-3.22	139	144	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 4

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL

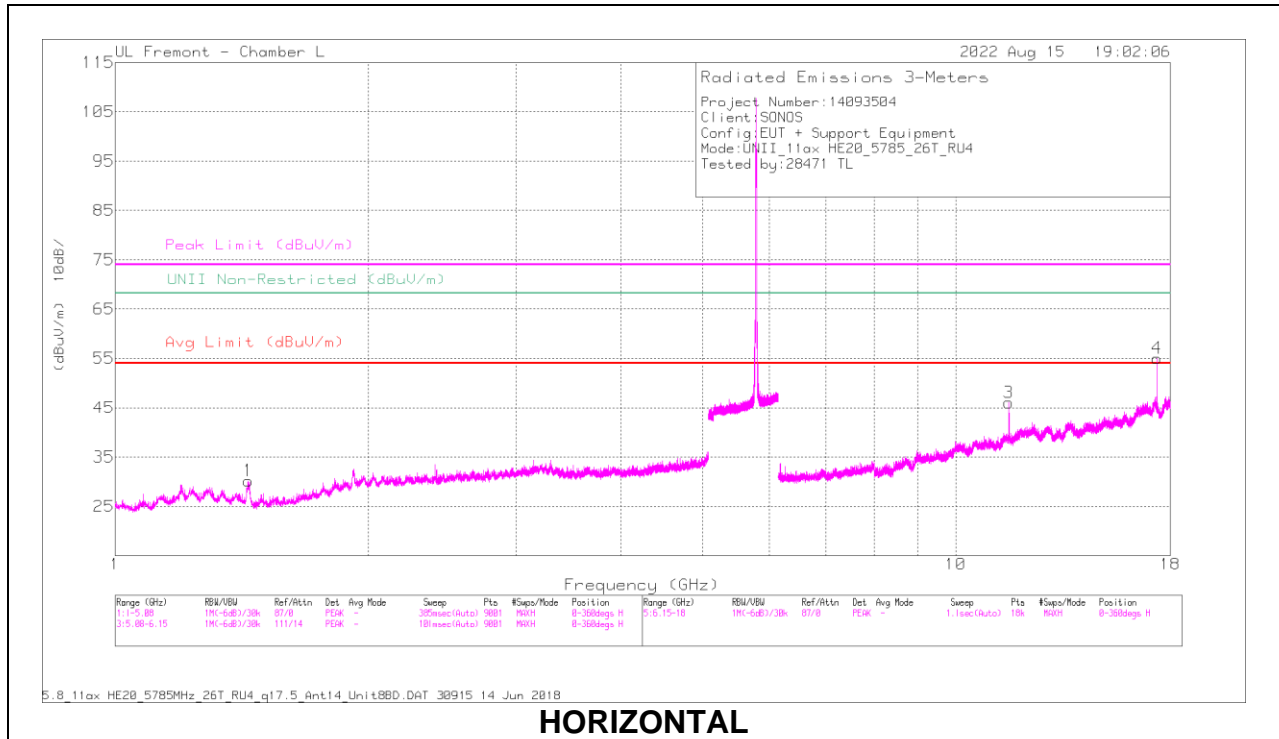

HORIZONTAL

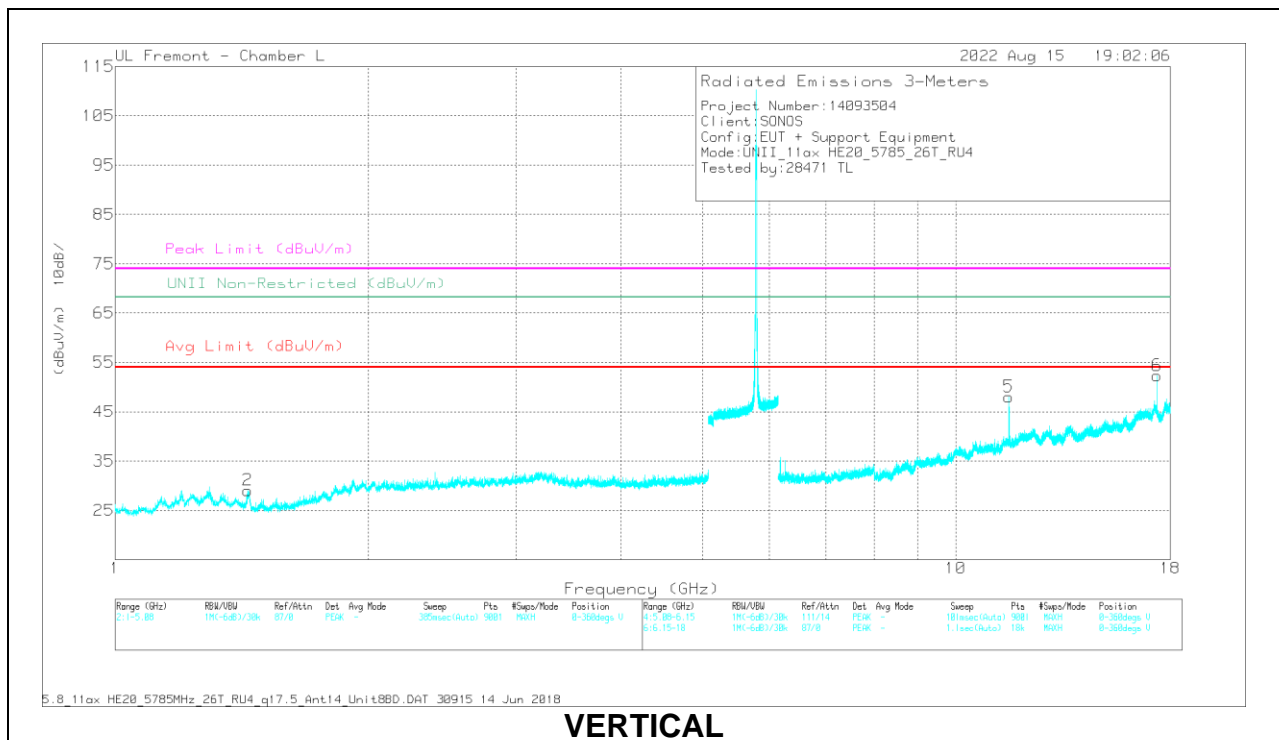

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB)	Amp/Cbl/Filtr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.440518	50.01	PK-U	28.4	-32.6	0	45.81	-	-	74	-28.19	-	-	64	123	H
	* 1.440138	31.75	ADR	28.4	-32.6	1.97	29.52	54	-24.48	-	-	-	-	64	123	H
2	* 1.439296	50.88	PK-U	28.4	-32.6	0	46.68	-	-	74	-27.32	-	-	267	197	V
	* 1.440123	32.1	ADR	28.4	-32.6	1.97	29.67	54	-24.13	-	-	-	-	267	197	V
3	* 11.569967	41.05	PK-U	38.8	-18.1	0	61.75	-	-	74	-12.25	-	-	80	110	H
	* 11.569767	25.27	ADR	38.8	-18.1	1.97	47.94	54	-6.06	-	-	-	-	60	110	H
4	17.355719	40.82	PK-U	41.4	-16	0	66.22	-	-	-	-	68.2	-1.98	80	101	H
5	* 11.569967	43.11	PK-U	38.8	-18.1	0	63.81	-	-	74	-10.19	-	-	131	196	V
	* 11.569855	26.94	ADR	38.8	-18.1	1.97	49.61	54	-4.39	-	-	-	-	131	196	V
6	17.354083	39.09	PK-U	41.4	-16	0	64.49	-	-	-	-	68.2	-3.71	82	102	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 8

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

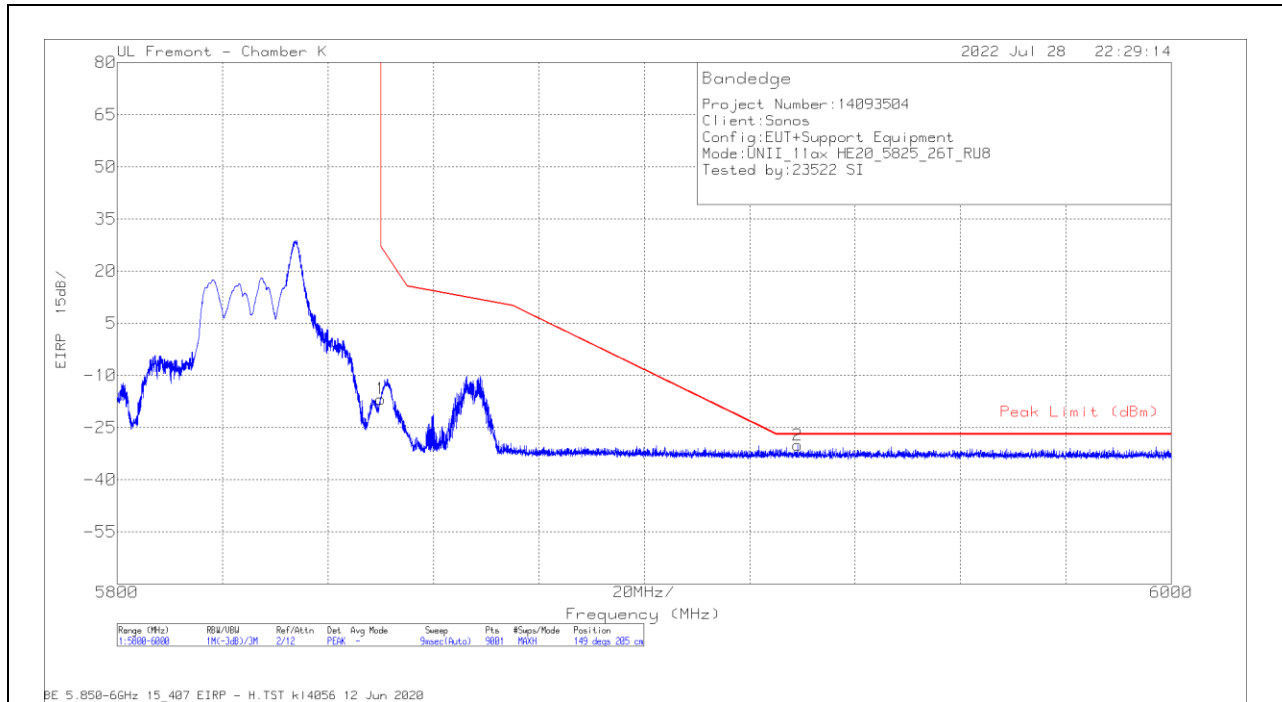

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-56.91	Pk	34.9	-6.6	11.8	-16.81	27	-43.81	149	205	H
2	5929.132	-70.62	Pk	35.1	-6.4	11.8	-30.12	-27	-3.12	149	205	H

Pk - Peak detector

VERTICAL RESULT




Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	80402 ACF(dB) -3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-52.99	Pk	34.9	-6.6	11.8	-12.89	27	-39.89	43	202	V
2	5965.132	-70.89	Pk	35.2	-6.2	11.8	-30.09	-27	-3.09	43	202	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

HIGH CHANNEL

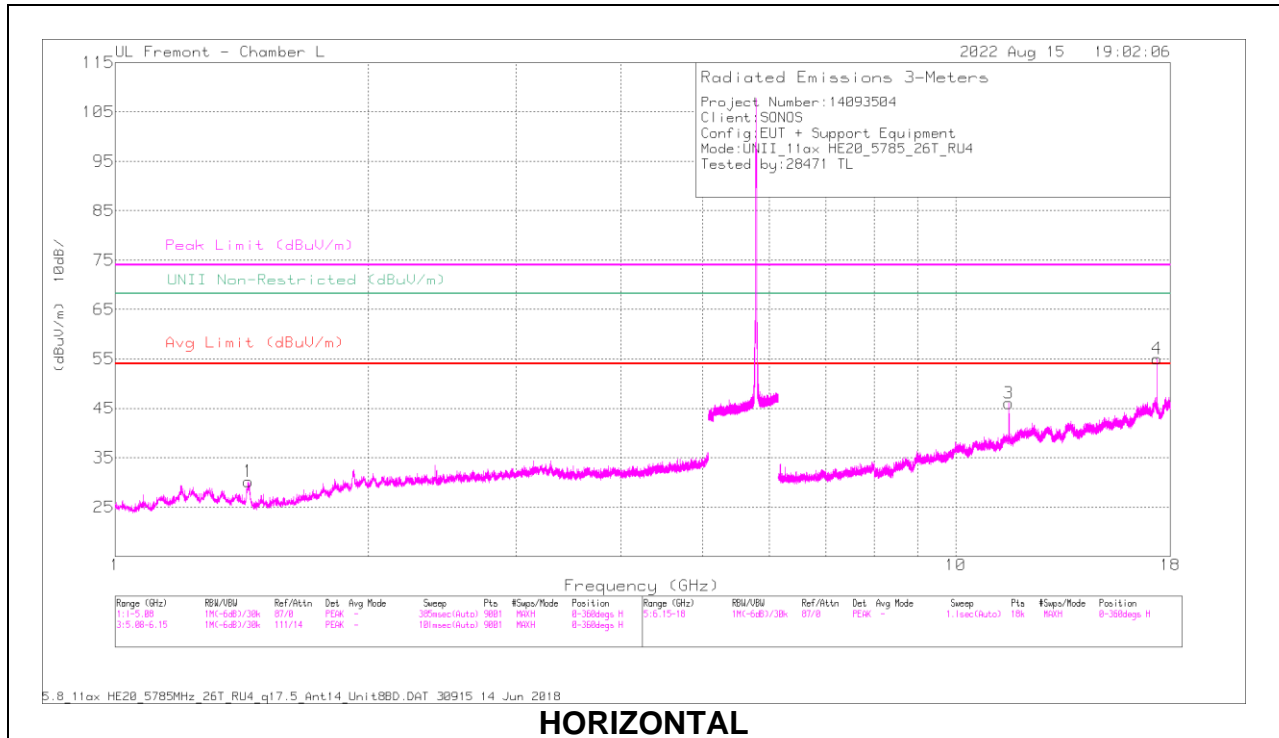

HORIZONTAL

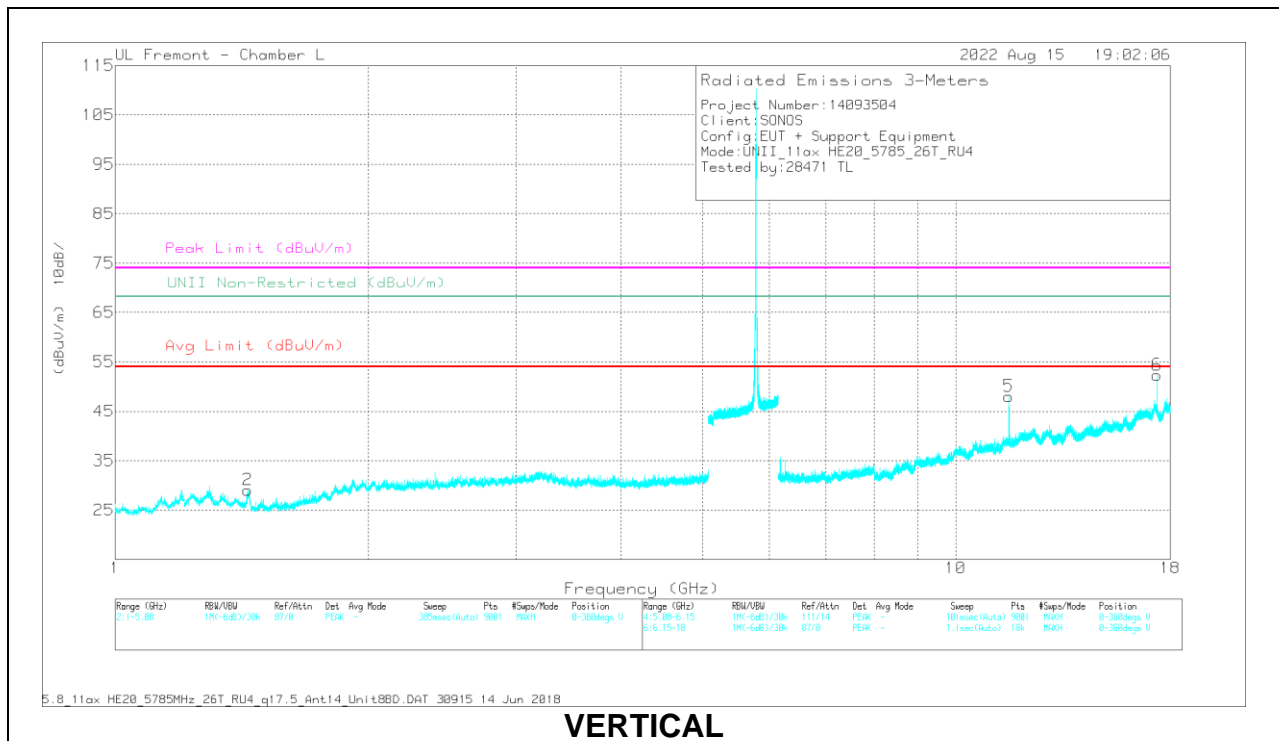

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB)	Amp/Cbl/Filtr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.440518	50.01	PK-U	28.4	-32.6	0	45.81	-	-	74	-28.19	-	-	64	123	H
	* 1.440138	31.75	ADR	28.4	-32.6	1.97	29.52	54	-24.48	-	-	-	-	64	123	H
2	* 1.439296	50.88	PK-U	28.4	-32.6	0	46.68	-	-	74	-27.32	-	-	267	197	V
	* 1.440123	32.1	ADR	28.4	-32.6	1.97	29.67	54	-24.13	-	-	-	-	267	197	V
3	* 11.569967	41.05	PK-U	38.8	-18.1	0	61.75	-	-	74	-12.25	-	-	80	110	H
	* 11.569767	25.27	ADR	38.8	-18.1	1.97	47.94	54	-6.06	-	-	-	-	60	110	H
4	17.355719	40.82	PK-U	41.4	-16	0	66.22	-	-	-	-	68.2	-1.98	80	101	H
5	* 11.569967	43.11	PK-U	38.8	-18.1	0	63.81	-	-	74	-10.19	-	-	131	196	V
	* 11.569855	26.94	ADR	38.8	-18.1	1.97	49.61	54	-4.39	-	-	-	-	131	196	V
6	17.354083	39.09	PK-U	41.4	-16	0	64.49	-	-	-	-	68.2	-3.71	82	102	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 1 + Antenna 4 OFDMA MODE: 242-Tones, RU Index 61

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

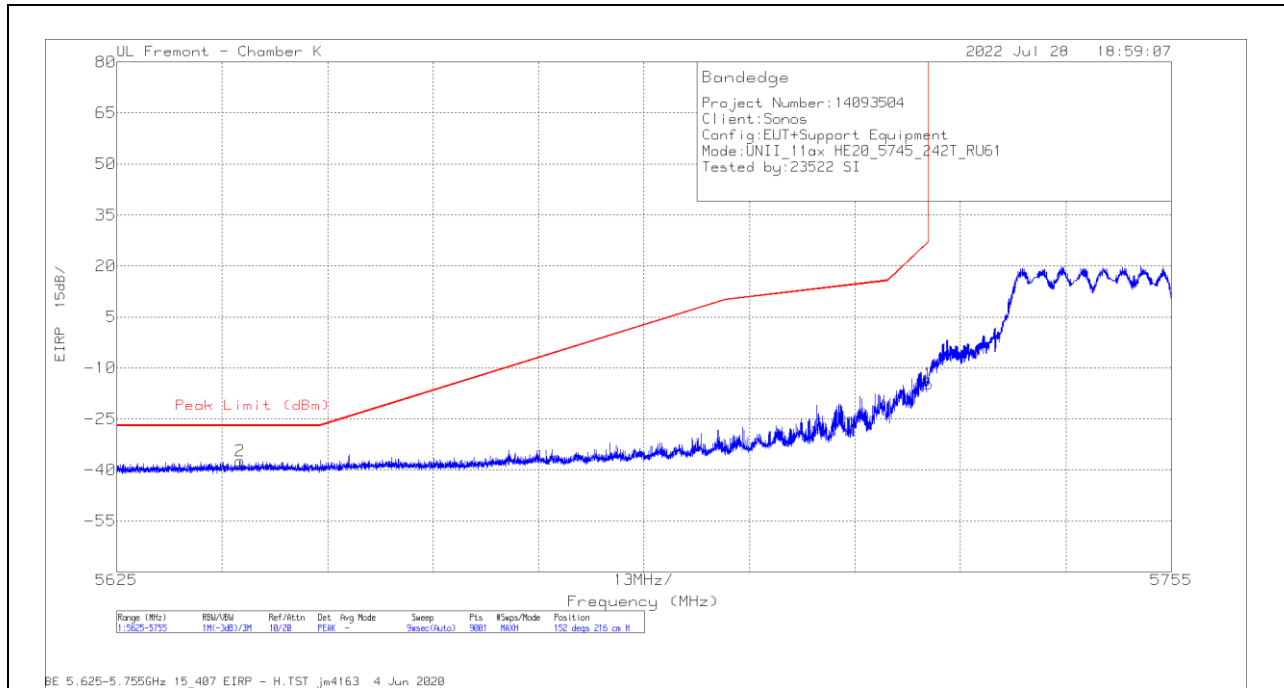


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	-31.08	Pk	34.8	-30.1	11.8	-14.58	27	-41.58	152	216	H
2	5640.195	-53.58	Pk	34.8	-30.3	11.8	-37.28	-27	-10.28	152	216	H

Pk - Peak detector

VERTICAL RESULT

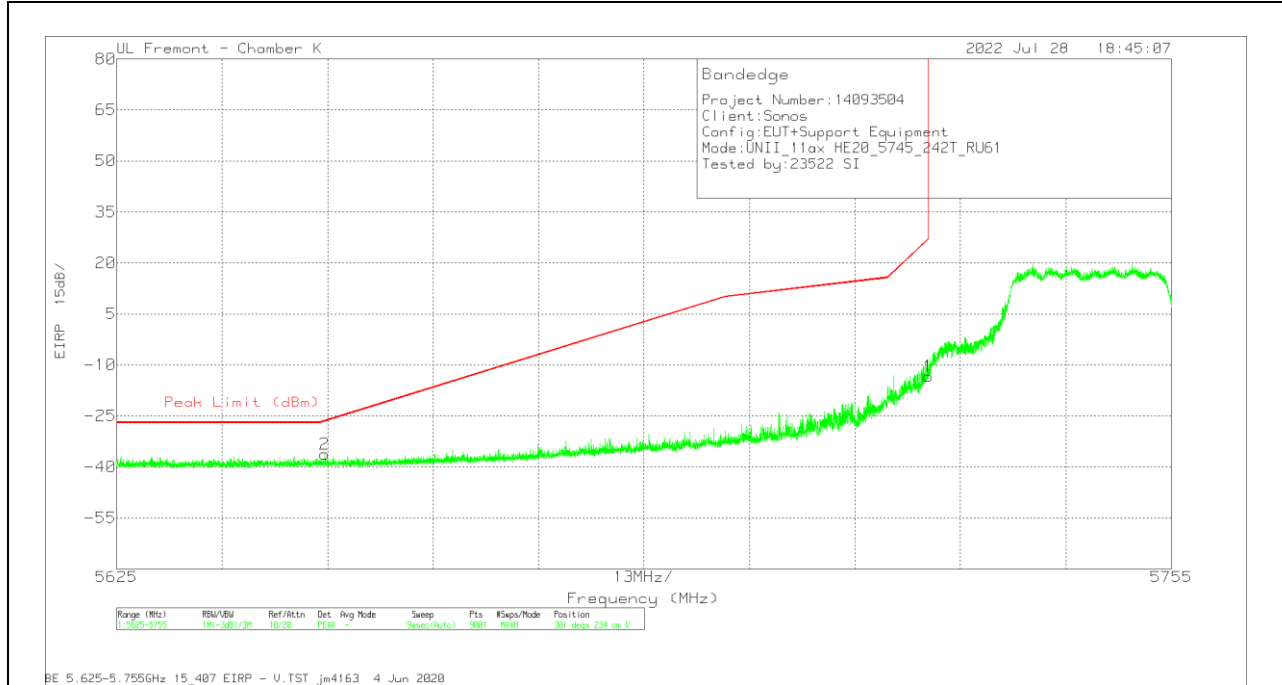


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	-29.91	Pk	34.8	-30.1	11.8	-13.41	27	-40.41	301	234	V
2	5650.681	-52.8	Pk	34.8	-30.1	11.8	-36.3	-26.5	-9.8	301	234	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

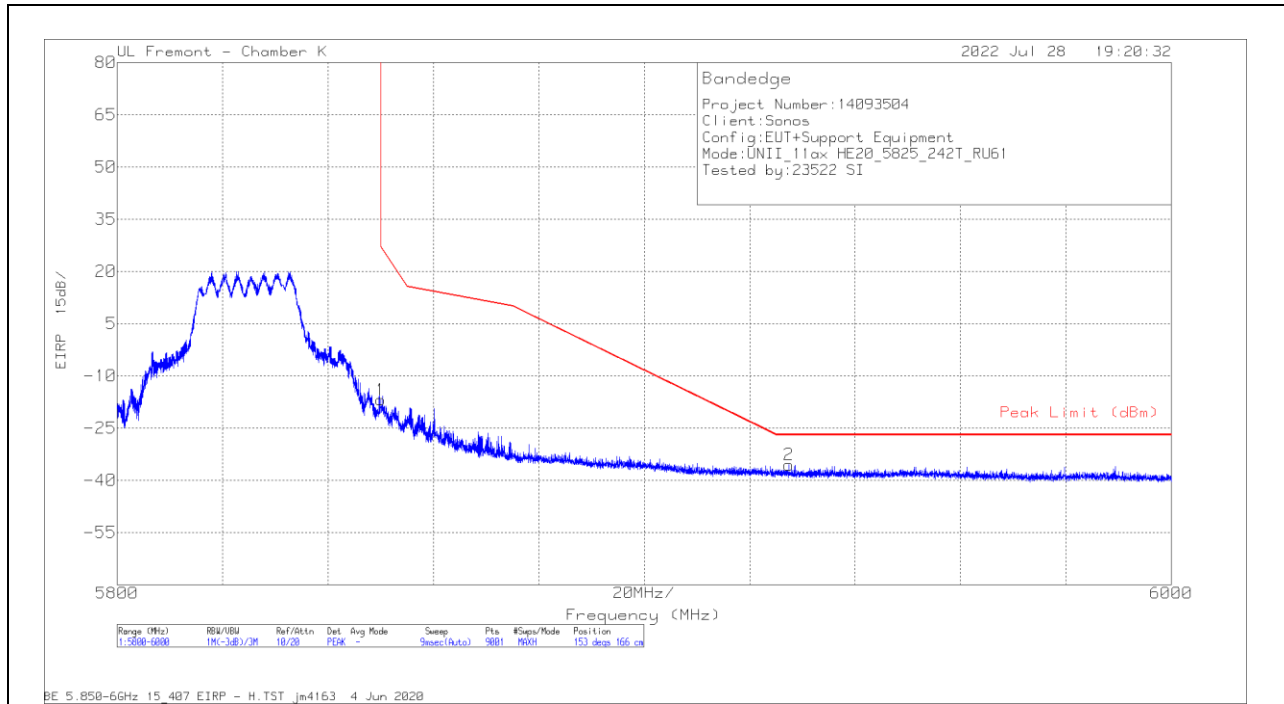


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-33.72	Pk	34.9	-29.9	11.8	-16.92	27	-43.92	153	166	H
2	5927.421	-52.57	Pk	35.1	-29.9	11.8	-35.57	-27	-8.57	153	166	H

Pk - Peak detector

VERTICAL RESULT

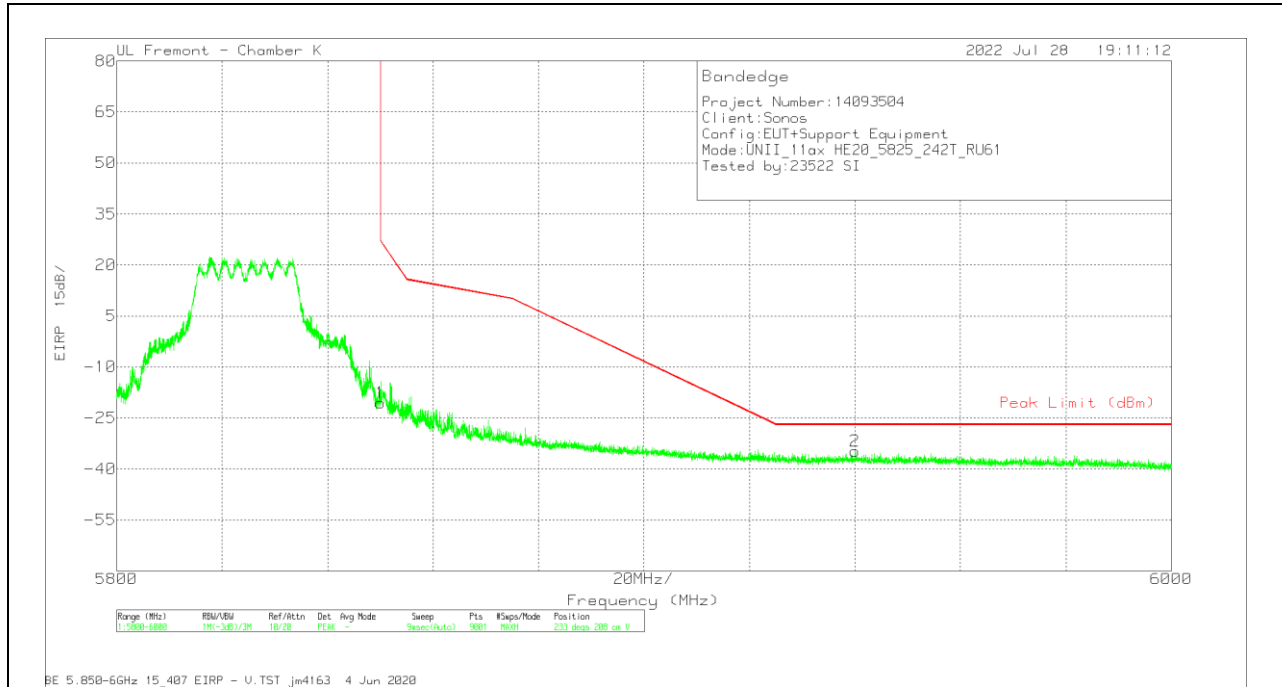


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-37.41	Pk	34.9	-29.9	11.8	-20.61	27	-47.61	233	208	V
2	5940.043	-52.03	Pk	35.2	-29.7	11.8	-34.73	-27	-7.73	233	208	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

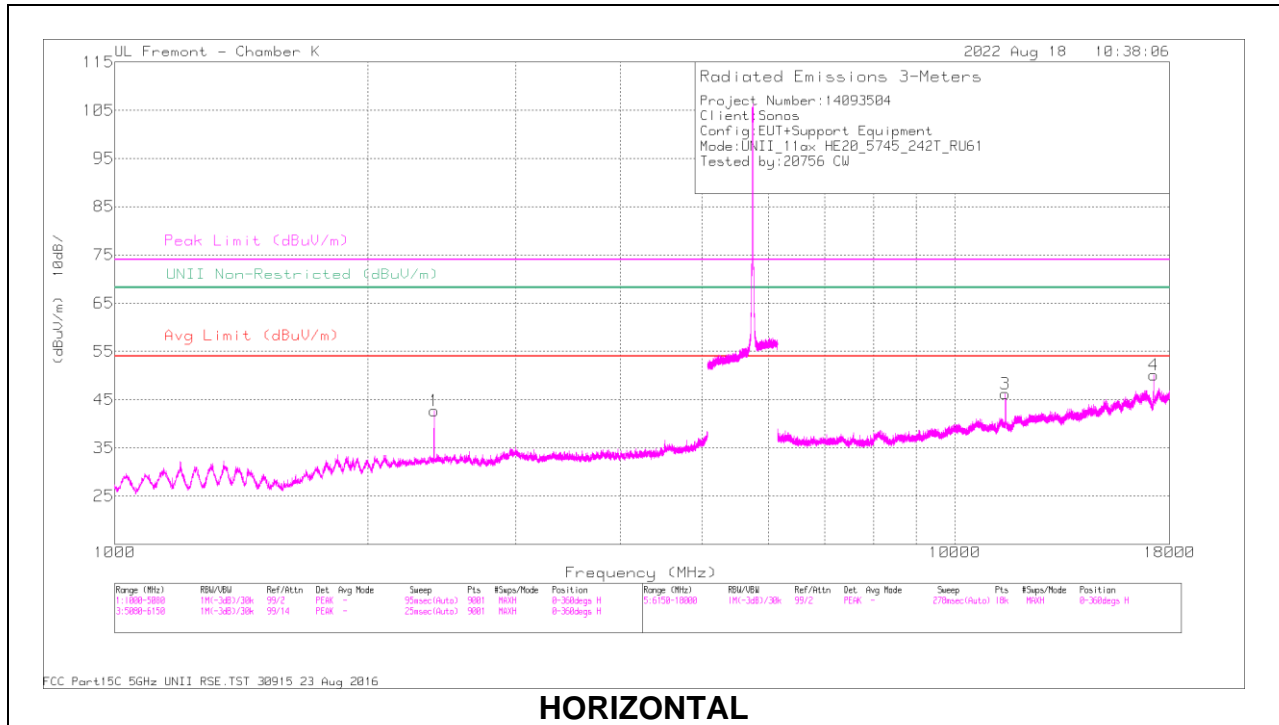

HORIZONTAL

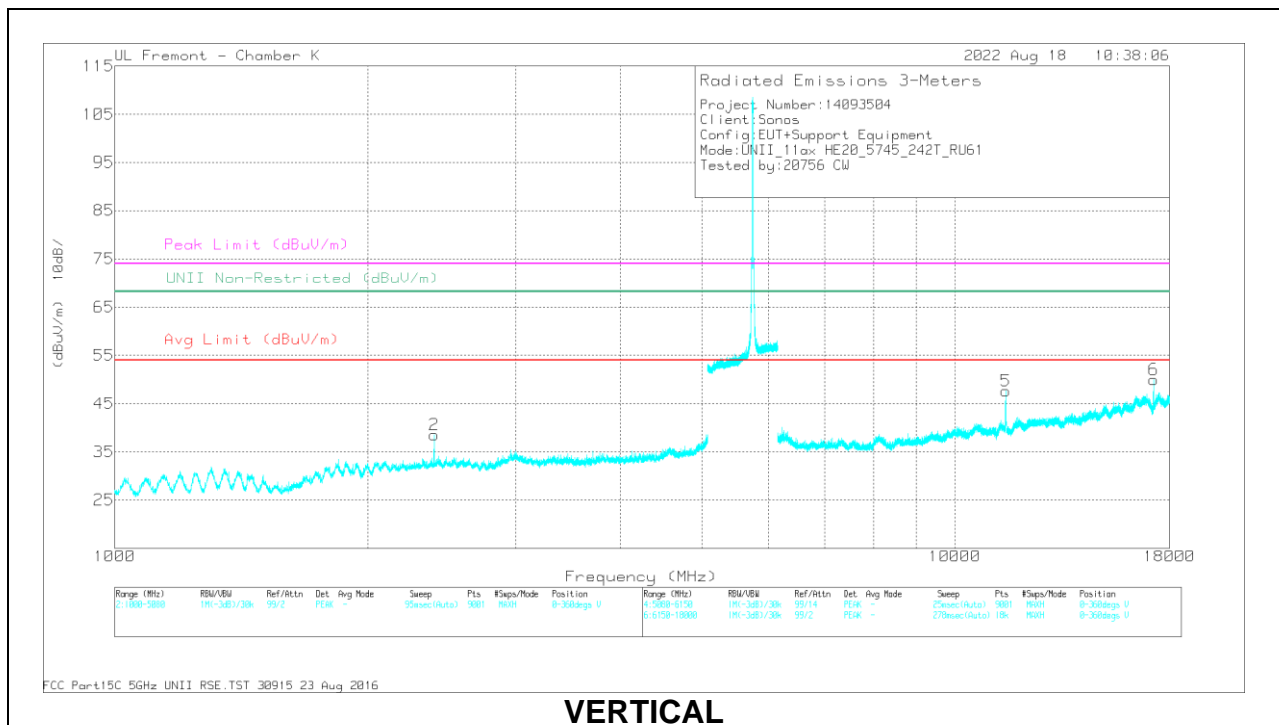

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) -3mH	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2399.968	64.09	PK-U	32.5	-44.6	0	51.99	-	-	-	-	68.2	-16.21	105	202	H
2	2400.012	62.04	PK-U	32.5	-44.6	0	49.94	-	-	-	-	68.2	-18.26	24	241	V
3	* 11487.233	54.66	PK-U	38.2	-35.9	0	56.96	-	-	74	-17.04	-	-	233	152	H
	* 11487.433	39.26	ADR	38.2	-35.9	2.93	44.49	54	-9.51	-	-	-	-	233	152	H
4	17231.659	51.6	PK-U	41.5	-31.8	0	61.3	-	-	-	-	68.2	-6.9	281	109	H
5	* 11487.426	60.14	PK-U	38.2	-35.9	0	62.44	-	-	74	-11.56	-	-	247	189	V
	* 11489.46	42.22	ADR	38.2	-35.9	2.93	47.45	54	-6.55	-	-	-	-	247	189	V
6	17234.987	53.42	PK-U	41.5	-31.7	0	63.22	-	-	-	-	68.2	-4.98	245	131	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL

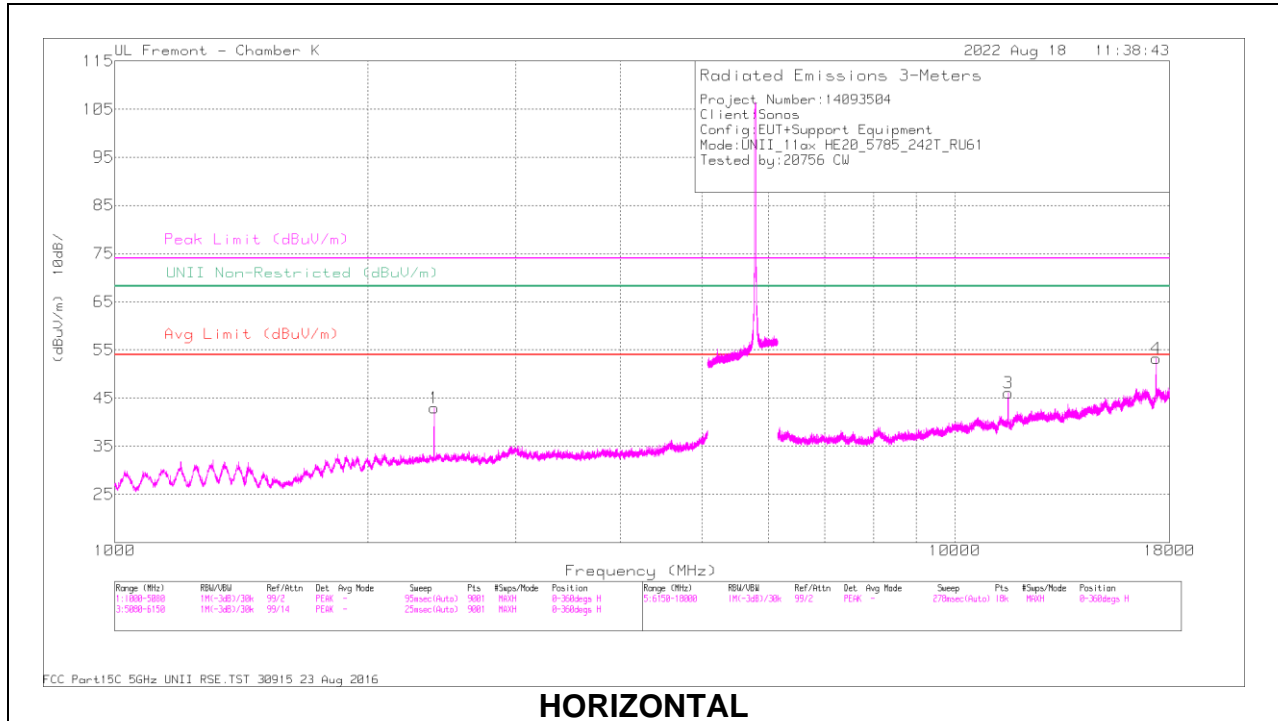

HORIZONTAL

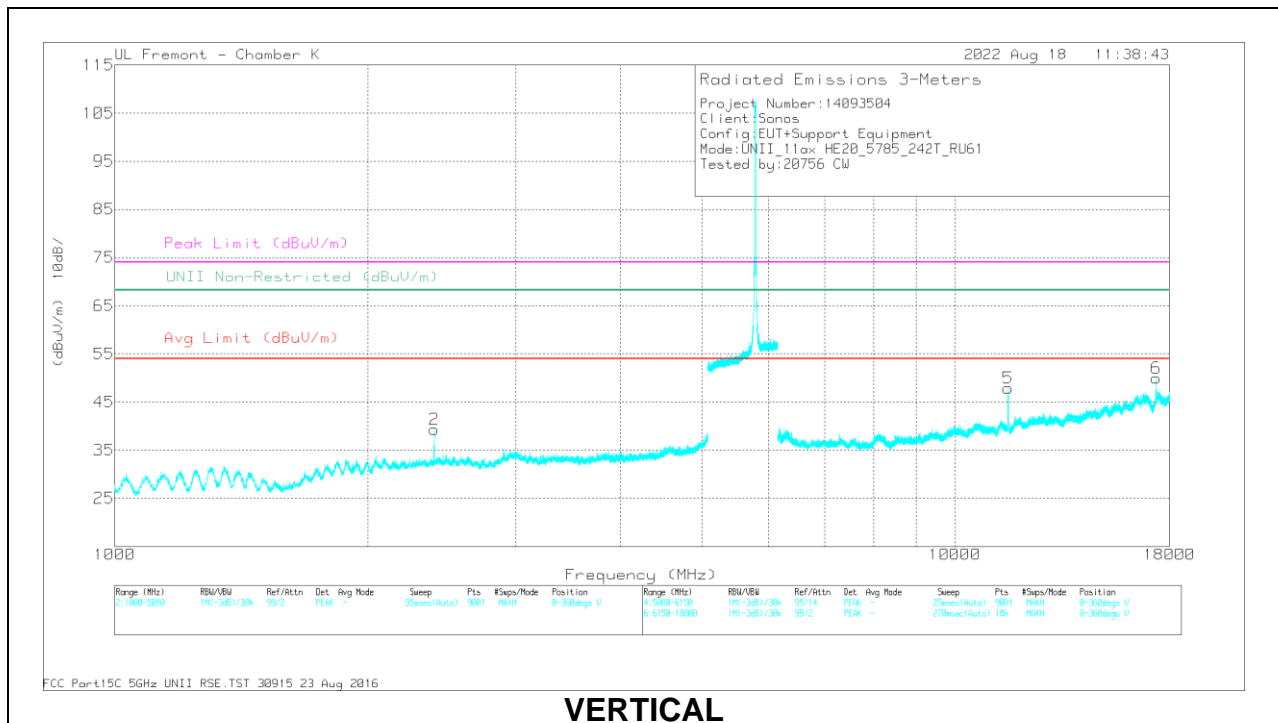

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) -3mH	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2399.836	63.45	PK-U	32.5	-44.6	0	51.35	-	-	-	-	68.2	-16.85	105	281	H
2	2400.392	59.64	PK-U	32.5	-44.7	0	47.44	-	-	-	-	68.2	-20.76	66	101	V
3	* 11573.229	56.67	PK-U	38.3	-35.7	0	59.27	-	-	74	-14.73	-	-	235	114	H
	* 11572.006	40.18	ADR	38.3	-35.6	2.93	45.81	54	-8.19	-	-	-	-	235	114	H
4	17355.893	56.69	PK-U	41.4	-31.3	0	66.79	-	-	-	-	68.2	-1.41	51	200	H
5	* 11566.54	58	PK-U	38.3	-35.6	0	60.7	-	-	74	-13.3	-	-	256	190	V
	* 11567.147	41.12	ADR	38.3	-35.6	2.93	46.75	54	-7.25	-	-	-	-	256	190	V
6	17352.947	53.28	PK-U	41.4	-31.4	0	63.28	-	-	-	-	68.2	-4.92	306	148	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL

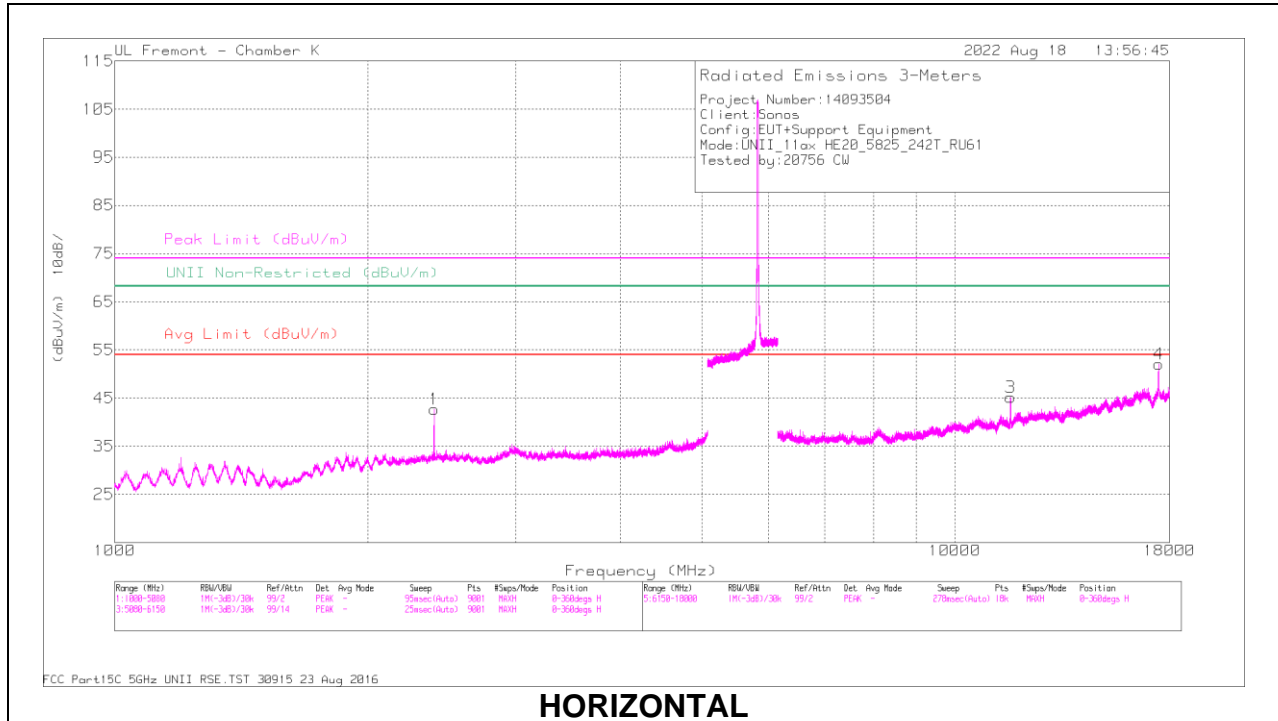

HORIZONTAL

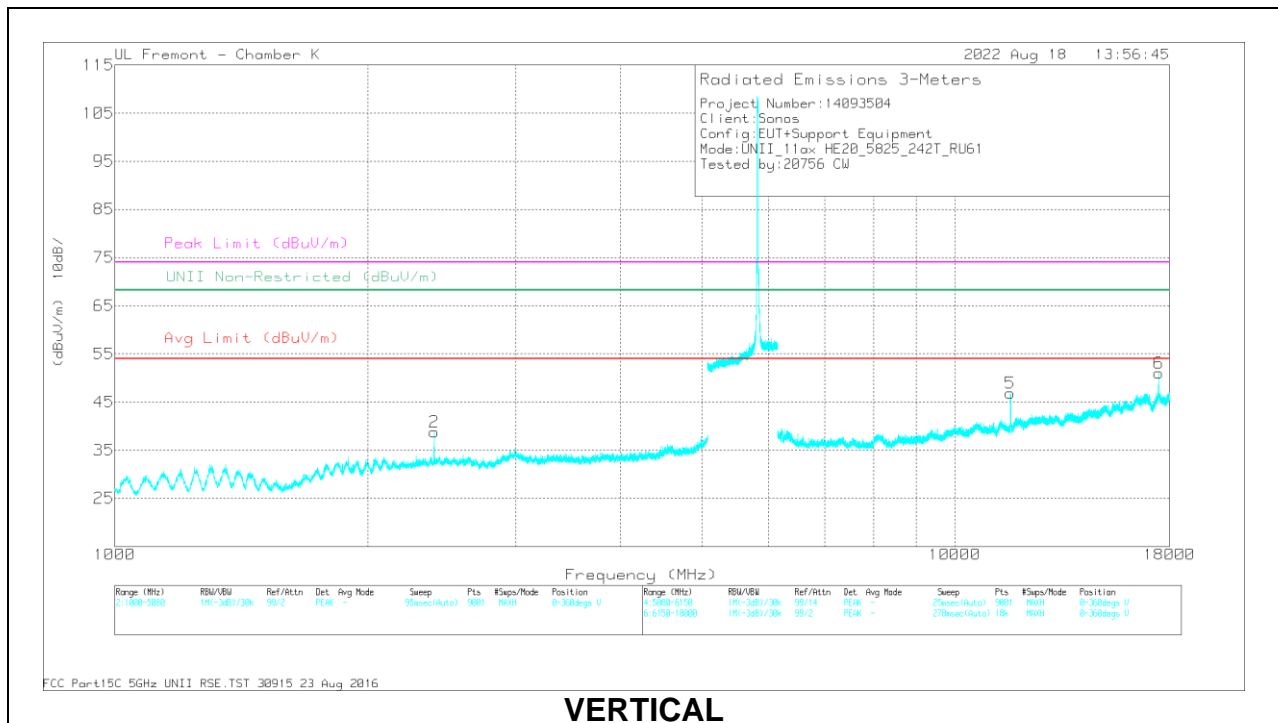

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) -3mH	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2399.553	64.09	PK-U	32.5	-44.6	0	51.99	-	-	-	-	68.2	-16.21	103	198	H
2	2399.717	61.88	PK-U	32.5	-44.6	0	49.78	-	-	-	-	68.2	-18.42	21	239	V
3	* 11644.275	54.41	PK-U	38.4	-35.2	0	57.61	-	-	74	-16.39	-	-	230	103	H
	* 11646.521	39.77	ADR	38.4	-35.3	2.93	45.8	54	-8.2	-	-	-	-	230	103	H
4	17471.962	56.35	PK-U	41.4	-30.6	0	67.15	-	-	-	-	68.2	-1.05	50	205	H
5	* 11644.052	57.02	PK-U	38.4	-35.2	0	60.22	-	-	74	-13.78	-	-	252	183	V
	* 11644.236	40.21	ADR	38.4	-35.2	2.93	46.34	54	-7.66	-	-	-	-	252	183	V
6	17476.823	54.62	PK-U	41.4	-30.5	0	65.52	-	-	-	-	68.2	-2.68	228	232	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.11. TX ABOVE 1 GHz 802.11ax HE40 MODE IN THE 5.8GHz BAND

2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 0

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

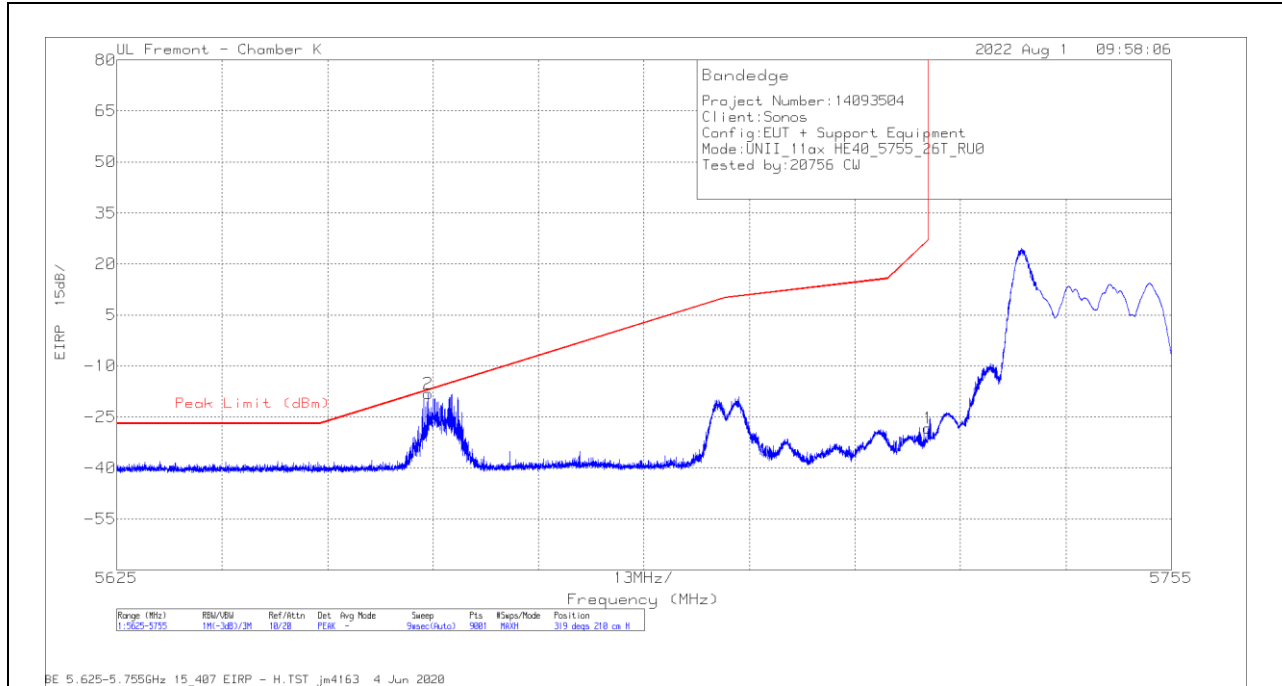


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	-44.88	Pk	34.8	-30.1	11.8	-28.38	27	-55.38	319	210	H
2	5663.421	-34.6	Pk	34.8	-30.2	11.8	-18.2	-17.07	-1.13	319	210	H

Pk - Peak detector

VERTICAL RESULT

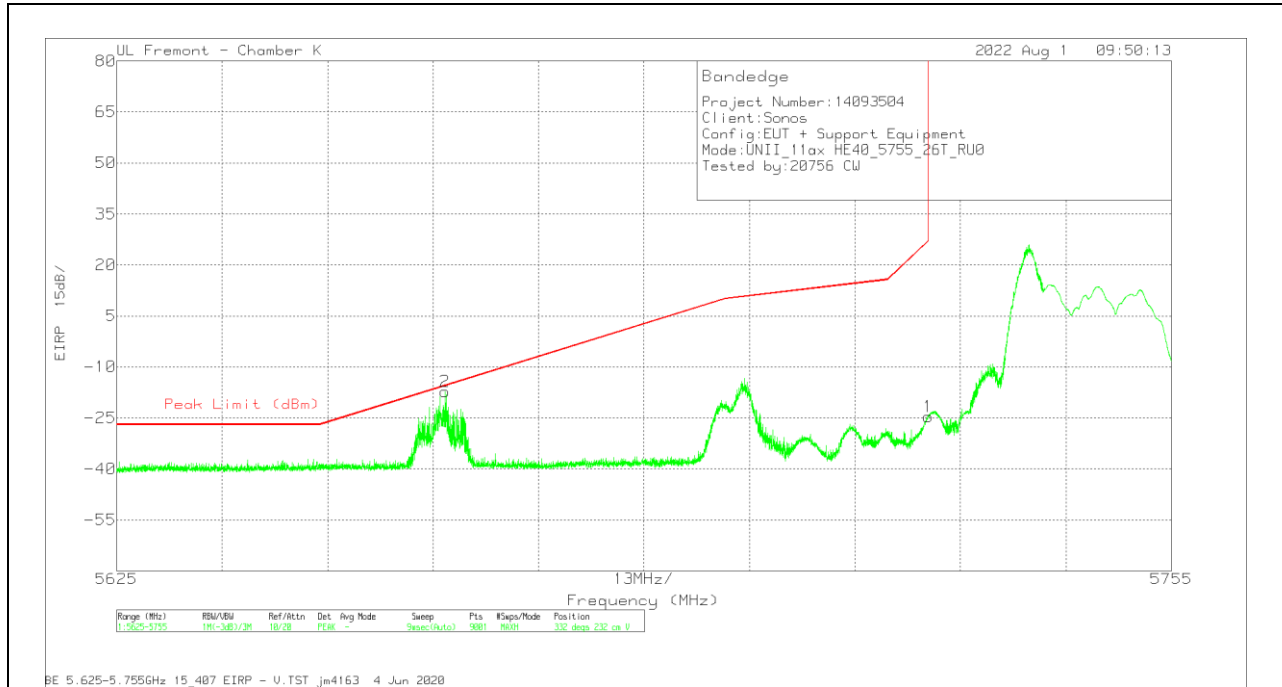


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	-41.06	Pk	34.8	-30.1	11.8	-24.56	27	-51.56	332	232	V
2	5665.458	-33.62	Pk	34.8	-30.2	11.8	-17.22	-15.56	-1.66	332	232	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

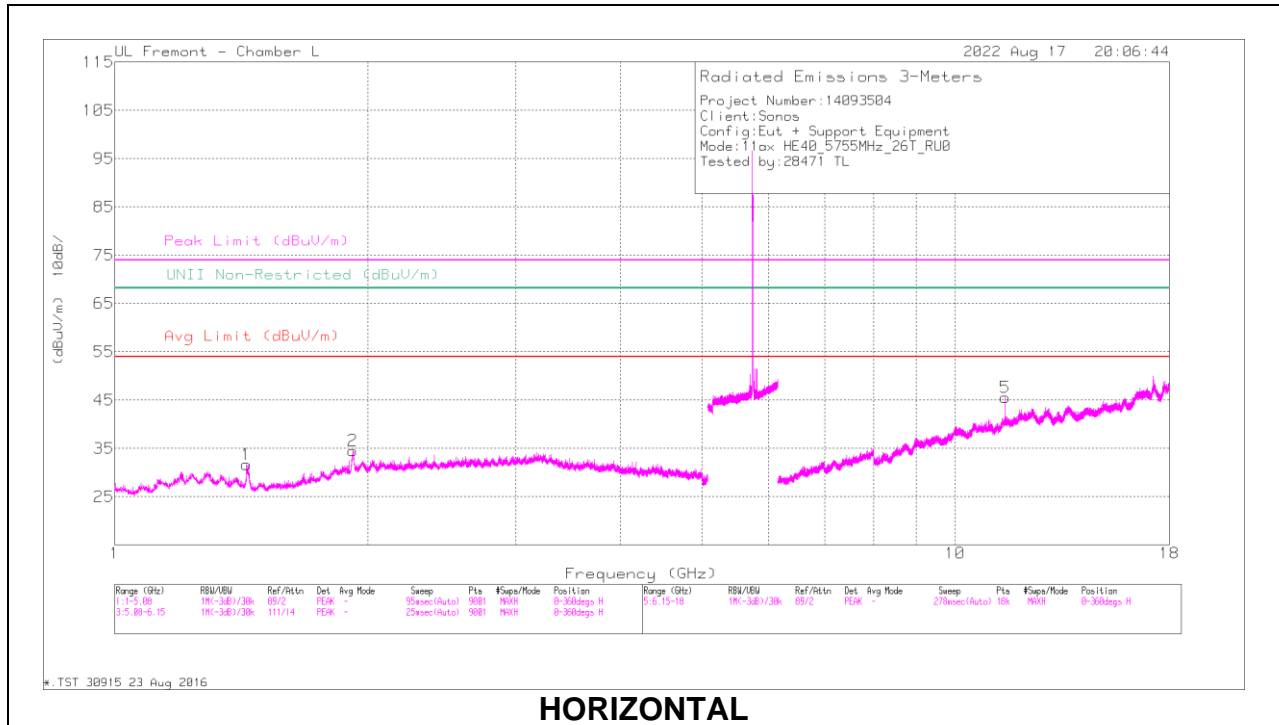

HORIZONTAL

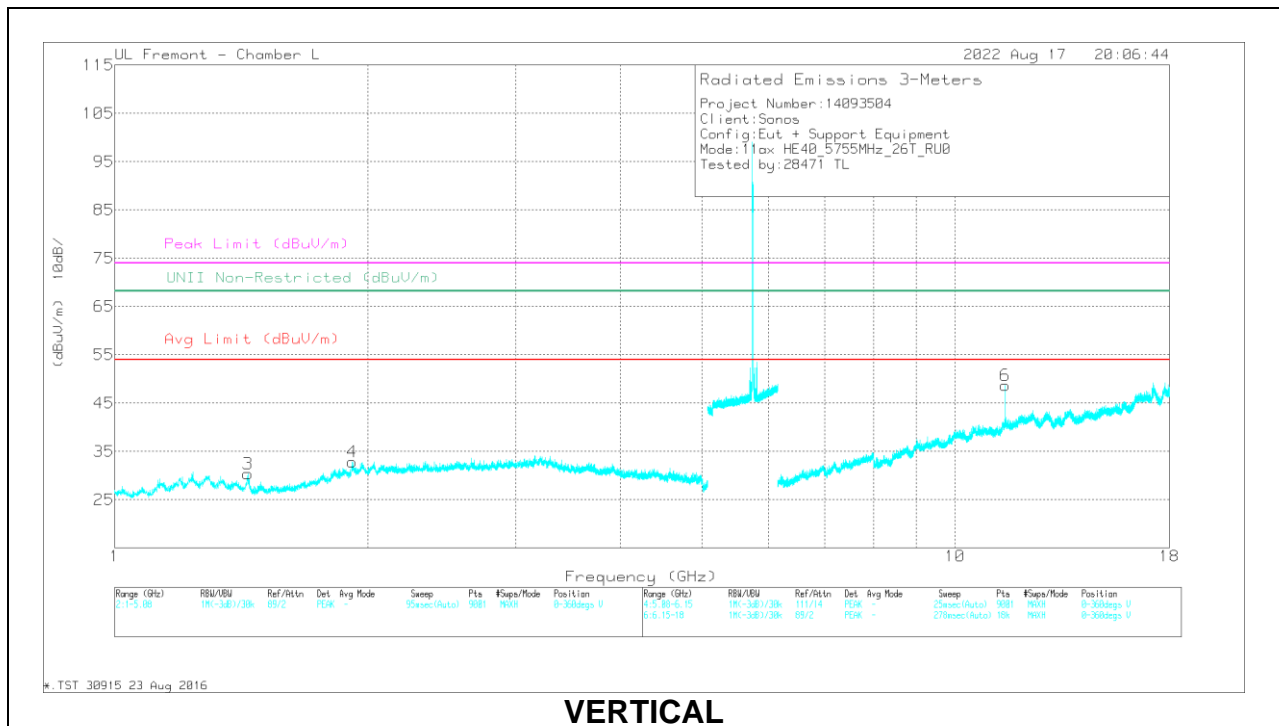

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB)	Amp/Cbl/Filtr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.43859	51.19	PK-U	28.4	-32.6	0	46.99	-	-	74	-27.01	-	-	6	208	H
	* 1.43934	33.34	ADR	28.4	-32.6	1.84	30.98	54	-23.02	-	-	-	-	6	208	H
2	1.919483	52.46	PK-U	31.5	-31.2	0	52.76	-	-	-	-	68.2	-15.44	58	136	H
3	* 1.440362	59.86	PK-U	28.4	-32.6	0	55.66	-	-	74	-18.34	-	-	258	146	V
	* 1.440726	33.06	ADR	28.4	-32.6	1.84	30.7	54	-23.3	-	-	-	-	258	146	V
4	1.919678	45.83	PK-U	31.5	-31.2	0	46.13	-	-	-	-	68.2	-22.07	147	103	V
5	* 11.475046	42.61	PK-U	38.7	-18.7	0	62.61	-	-	74	-11.39	-	-	50	107	H
	* 11.474095	25.37	ADR	38.7	-18.7	1.84	47.21	54	-6.79	-	-	-	-	50	107	H
6	* 11.474987	43.88	PK-U	38.7	-18.7	0	63.88	-	-	74	-10.12	-	-	267	121	V
	* 11.473876	26.95	ADR	38.7	-18.7	1.84	48.79	54	-5.21	-	-	-	-	267	121	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 17

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

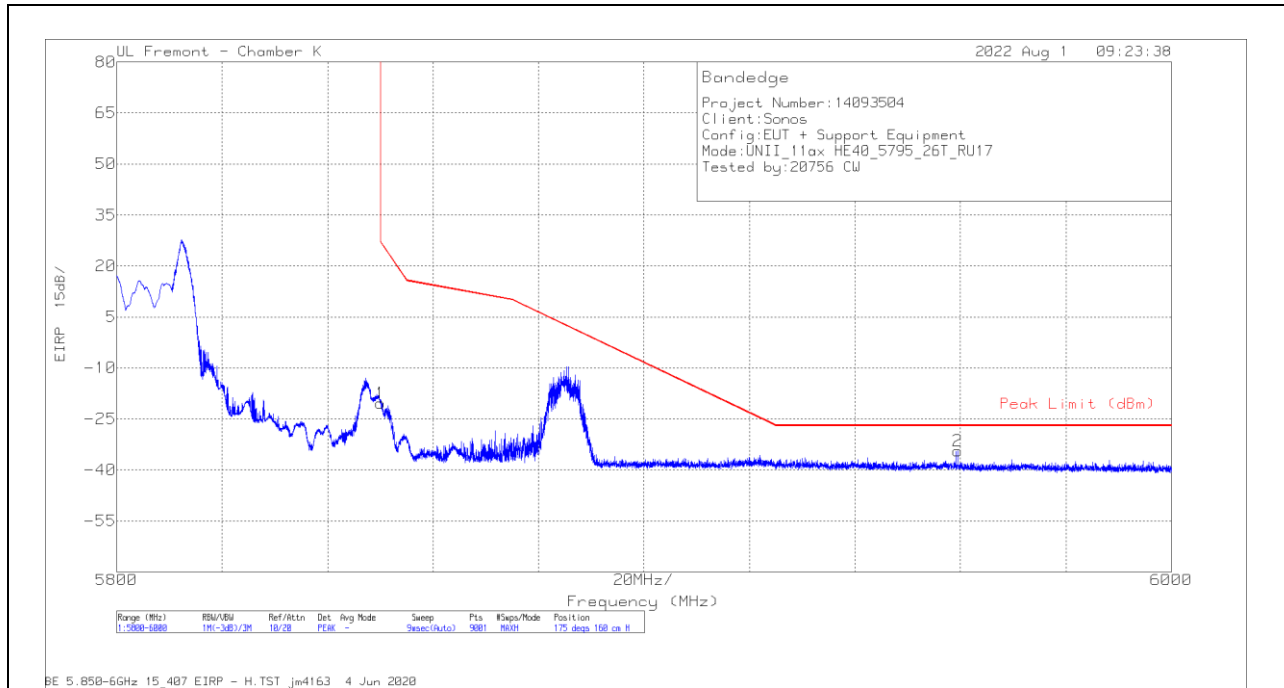


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-37.11	Pk	34.9	-29.9	11.8	-20.31	27	-47.31	175	160	H
2	5959.443	-51.59	Pk	35.2	-29.8	11.8	-34.39	-27	-7.39	175	160	H

Pk - Peak detector

VERTICAL RESULT

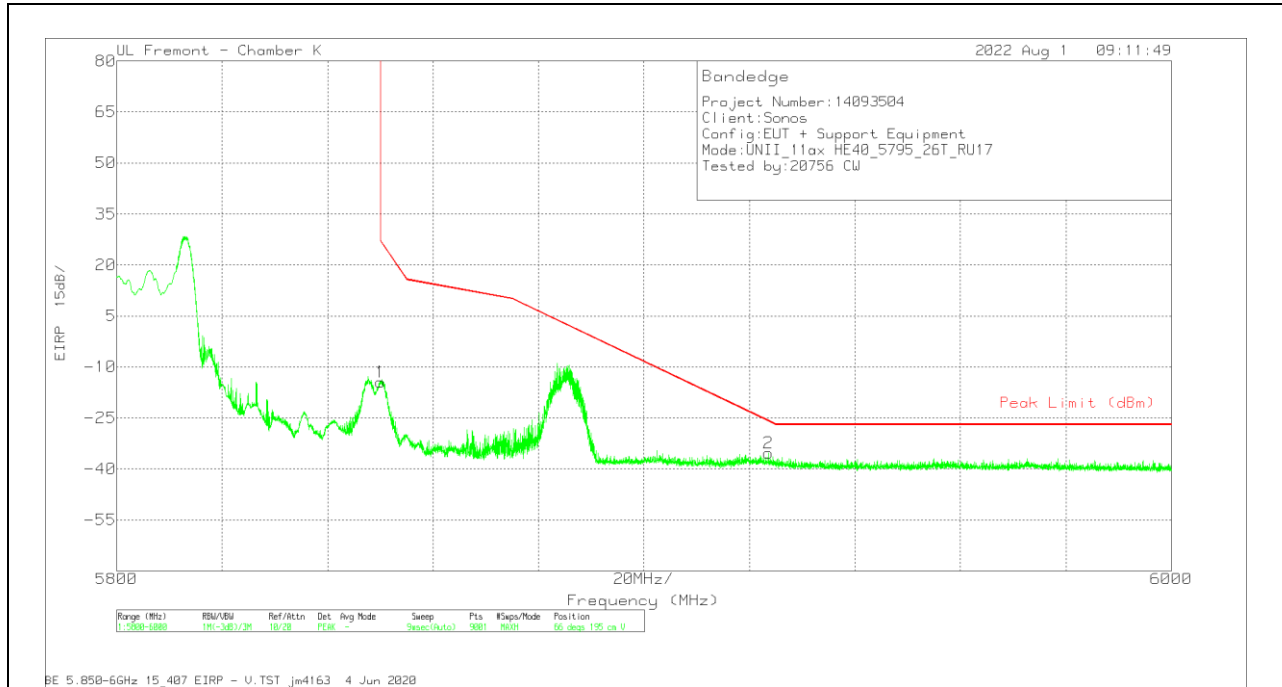


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-31.36	Pk	34.9	-29.9	11.8	-14.56	27	-41.56	66	195	V
2	5923.577	-52.37	Pk	35.1	-29.8	11.8	-35.27	-25.95	-9.32	66	195	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

HIGH CHANNEL

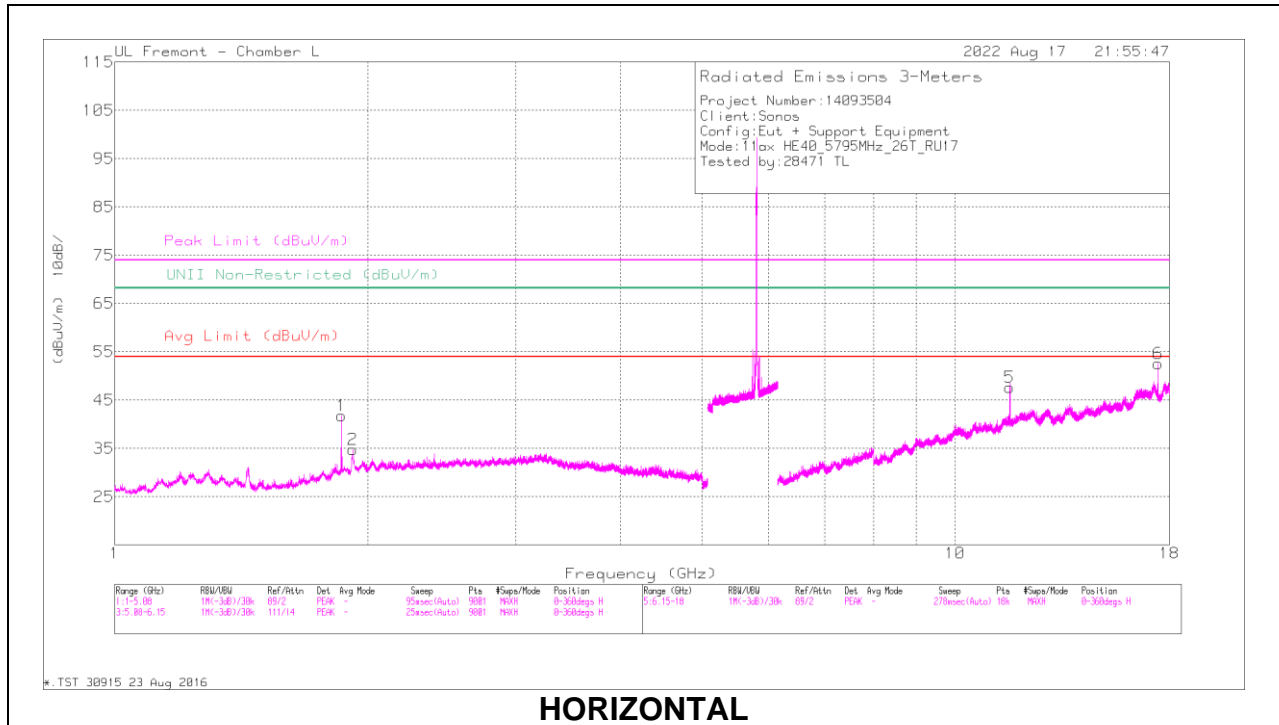

HORIZONTAL

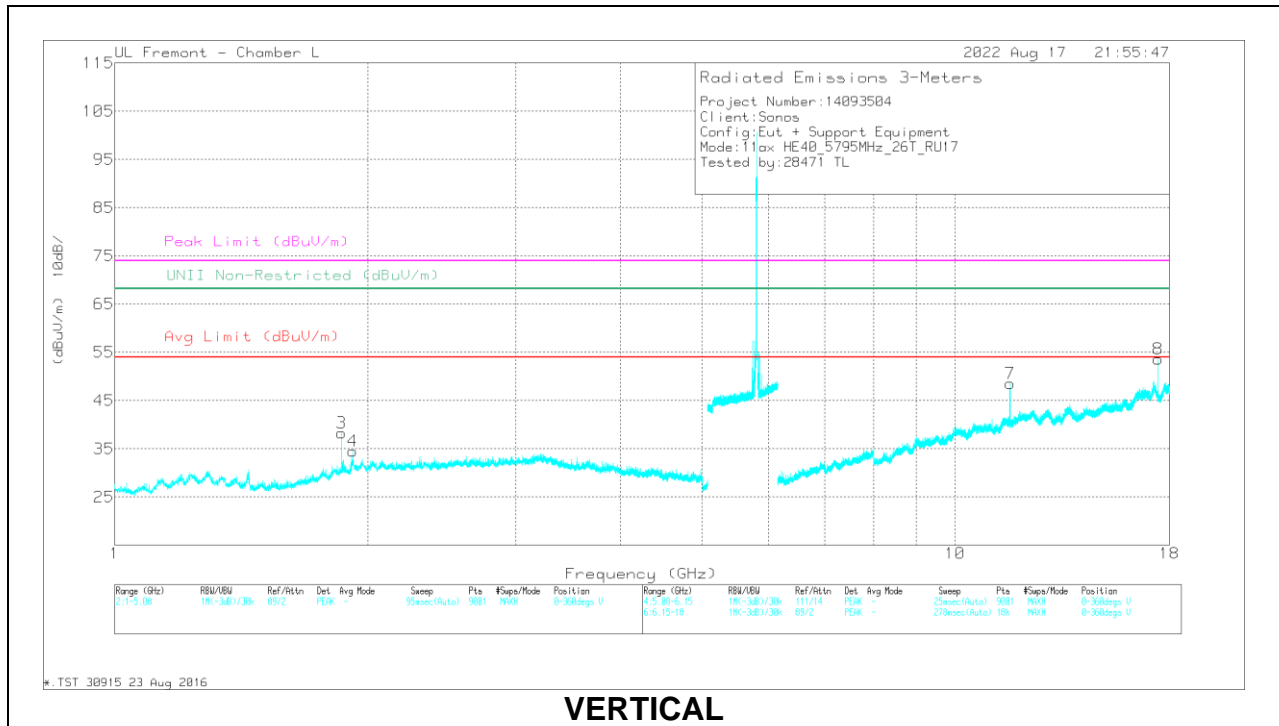

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB)	Amp/Cbl/Filtr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.860745	40.58	PK-U	31.1	-31.3	0	40.38	-	-	-	-	68.2	-27.82	49	358	H
2	1.920157	52.18	PK-U	31.5	-31.2	0	52.48	-	-	-	-	68.2	-15.72	360	220	H
3	1.862595	41.89	PK-U	31.1	-31.3	0	41.69	-	-	-	-	68.2	-26.51	5	197	V
4	1.919697	52.28	PK-U	31.5	-31.2	0	52.58	-	-	-	-	68.2	-15.62	12	350	V
5	* 11.62516	44.09	PK-U	38.9	-18.4	0	64.59	-	-	74	-9.41	-	-	225	187	H
	* 11.626103	25.64	ADR	38.9	-18.3	1.84	48.08	54	-5.92	-	-	-	-	225	187	H
6	17.438037	40.72	PK-U	41.2	-15.9	0	66.02	-	-	-	-	68.2	-2.18	344	200	H
7	* 11.625091	42.91	PK-U	38.9	-18.4	0	63.41	-	-	74	-10.59	-	-	135	193	V
	* 11.625931	27.34	ADR	38.9	-18.3	1.84	49.78	54	-4.22	-	-	-	-	135	193	V
8	17.438915	40.07	PK-U	41.2	-15.9	0	65.37	-	-	-	-	68.2	-2.83	67	172	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 1 + Antenna 4 OFDMA MODE: 484-Tones, RU Index 65

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

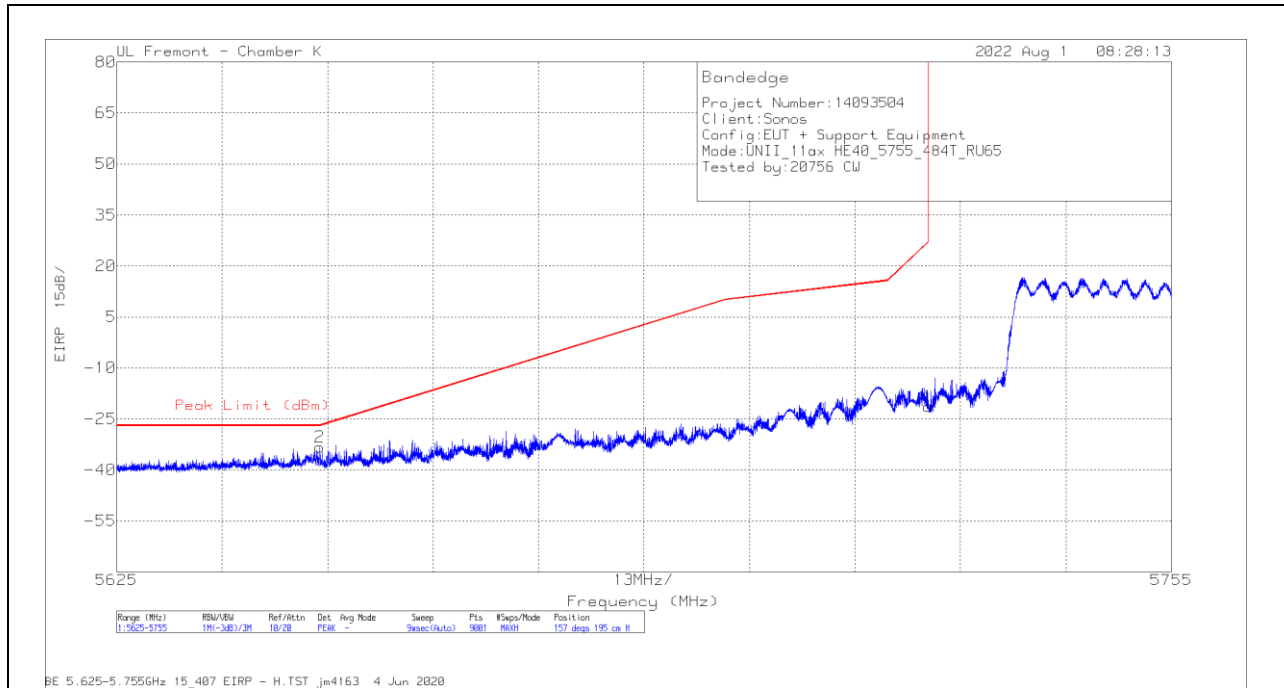


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	-37.74	Pk	34.8	-30.1	11.8	-21.24	27	-48.24	157	195	H
2	5650.06	-49.73	Pk	34.8	-30.2	11.8	-33.33	-26.96	-6.37	157	195	H

Pk - Peak detector

VERTICAL RESULT

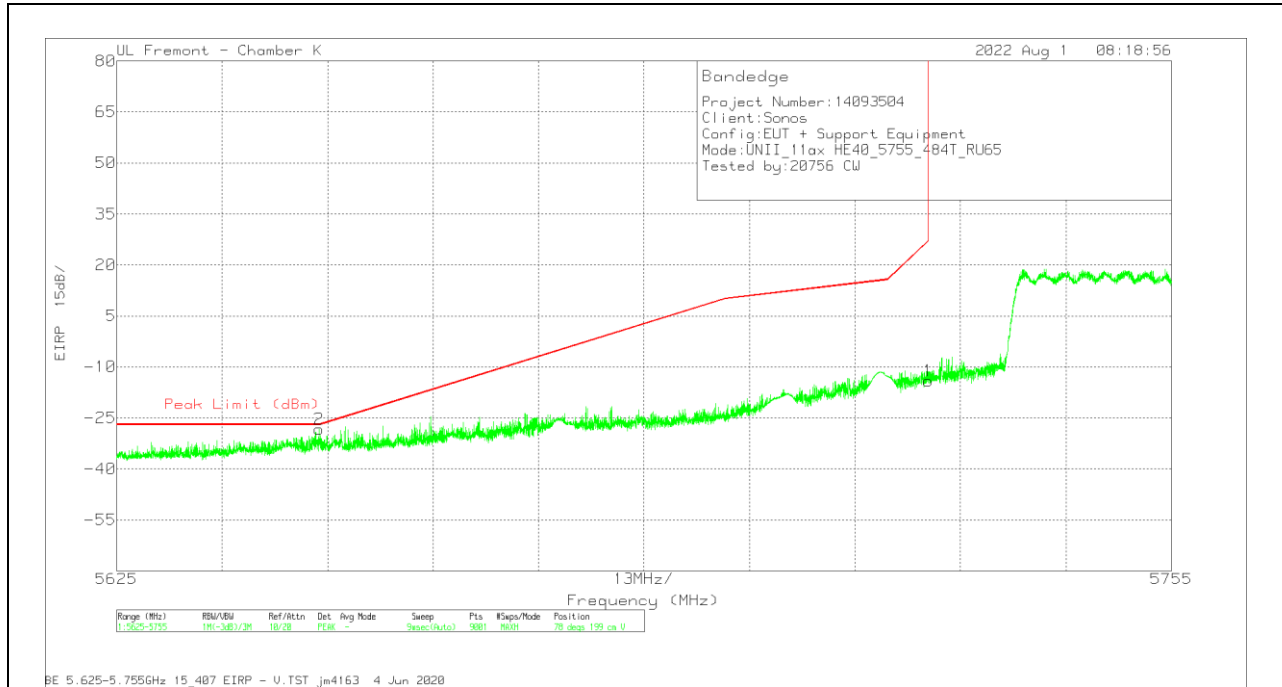


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	-30.57	Pk	34.8	-30.1	11.8	-14.07	27	-41.07	78	199	V
2	5649.945	-44.8	Pk	34.8	-30.2	11.8	-28.4	-27	-1.4	78	199	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

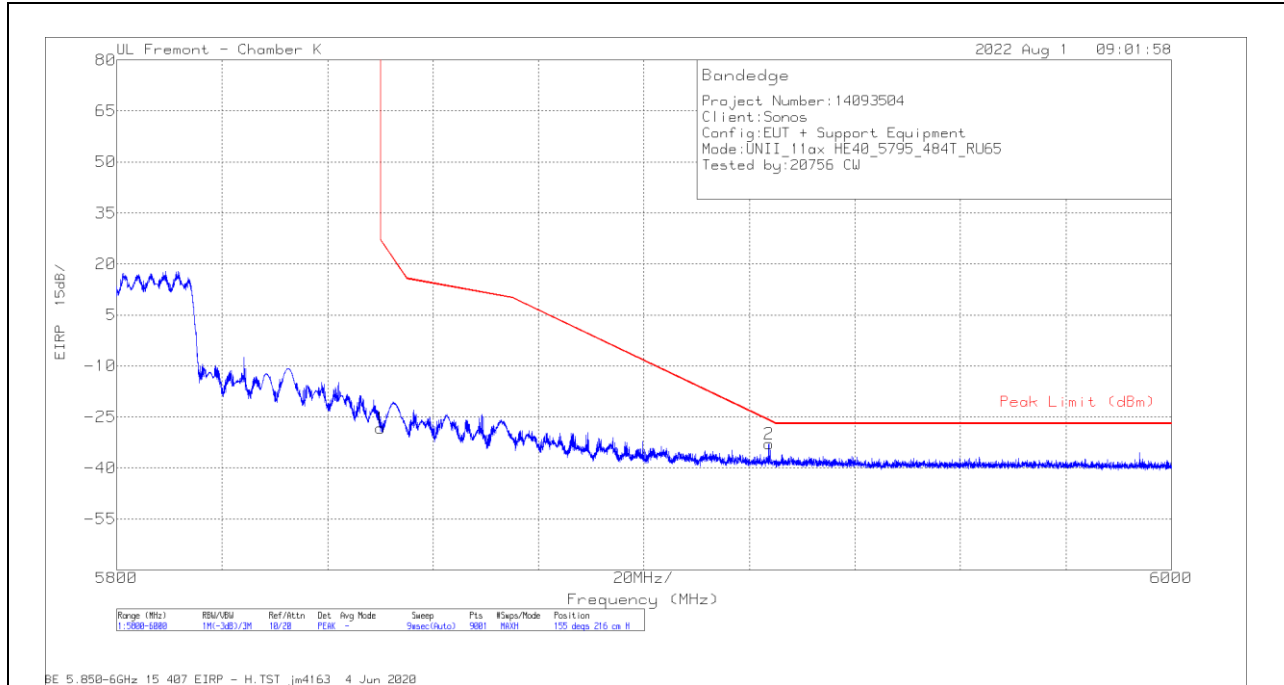


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-45.13	Pk	34.9	-29.9	11.8	-28.33	27	-55.33	155	216	H
2	5923.665	-49.97	Pk	35.1	-29.8	11.8	-32.87	-26.01	-6.86	155	216	H

Pk - Peak detector

VERTICAL RESULT

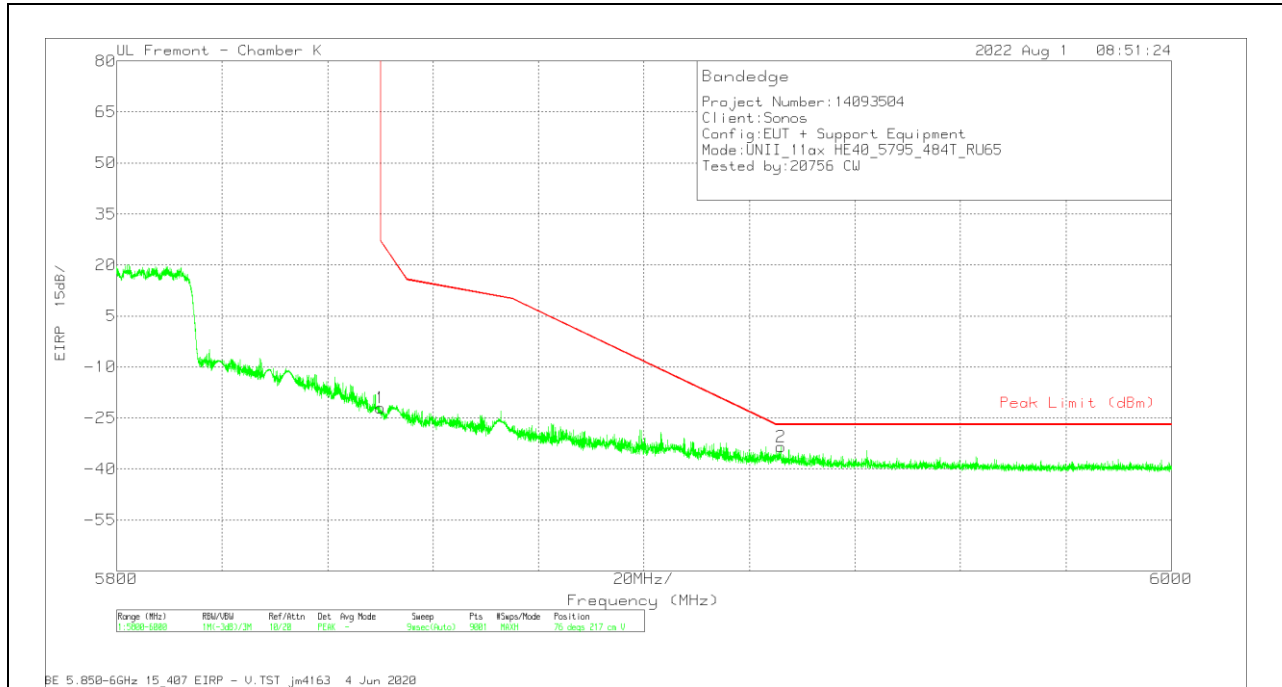


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-38.89	Pk	34.9	-29.9	11.8	-22.09	27	-49.09	76	217	V
2	5925.91	-50.57	Pk	35.1	-29.8	11.8	-33.47	-27	-6.47	76	217	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

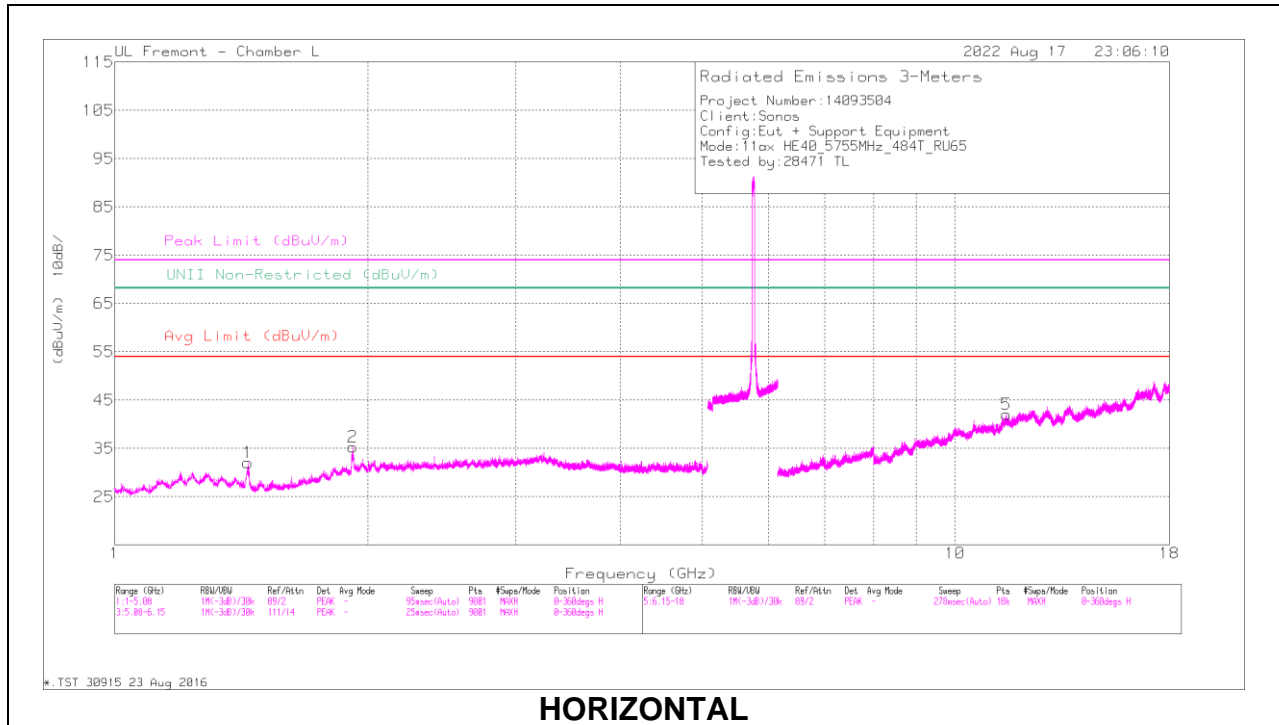

HORIZONTAL

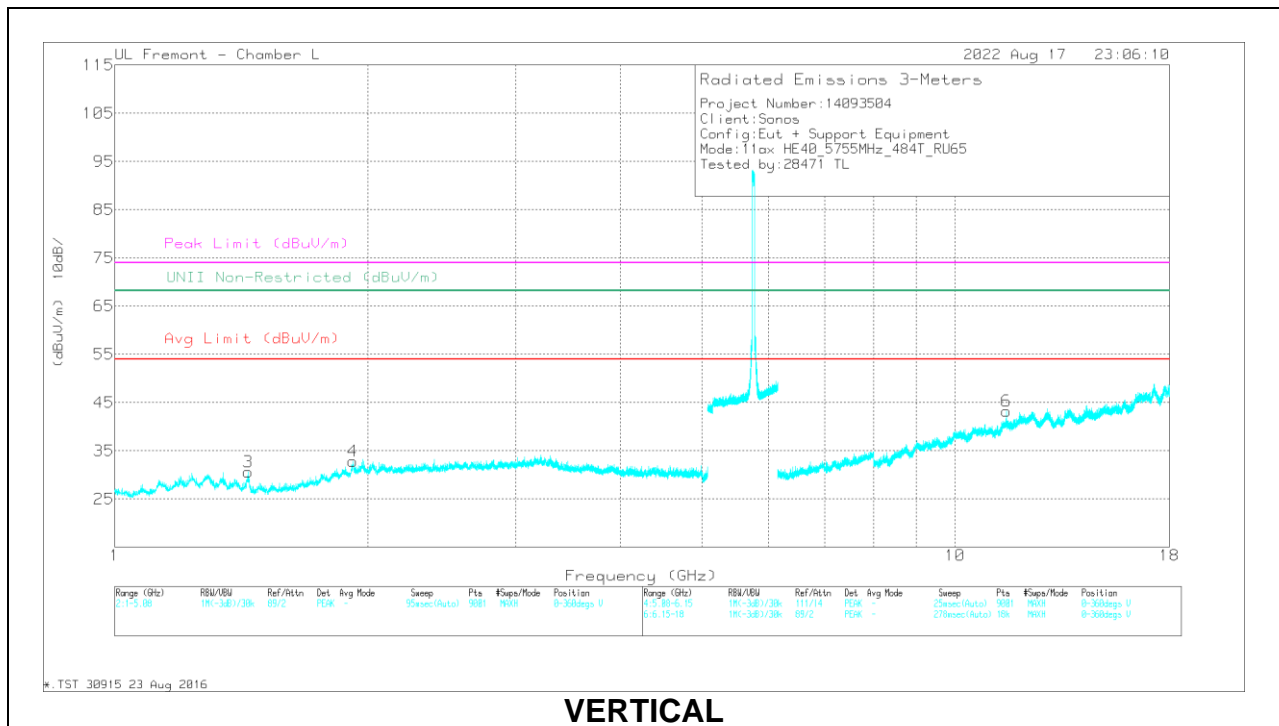

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	80707 ACF (dB)	Amp/Cbl/Filtr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.440822	56.95	PK-U	28.4	-32.6	0	52.75	-	-	74	-21.25	-	-	0	122	H
	* 1.439959	34.27	ADR	28.4	-32.6	2.96	33.03	54	-20.97	-	-	-	-	0	122	H
2	1.920232	51.81	PK-U	31.5	-31.2	0	52.11	-	-	-	-	68.2	-16.09	3	226	H
3	* 1.439453	51.24	PK-U	28.4	-32.6	0	47.04	-	-	74	-26.96	-	-	248	366	V
	* 1.440456	32.16	ADR	28.4	-32.6	2.96	30.92	54	-23.08	-	-	-	-	248	366	V
4	1.918814	44.48	PK-U	31.5	-31.2	0	44.78	-	-	-	-	68.2	-23.42	119	171	V
5	* 11.50771	32.37	PK-U	38.7	-18.4	0	52.67	-	-	74	-21.33	-	-	223	198	H
	* 11.510072	19.57	ADR	38.7	-18.4	2.96	42.83	54	-11.17	-	-	-	-	223	198	H
6	* 11.513723	32.78	PK-U	38.7	-18.5	0	52.98	-	-	74	-21.02	-	-	140	192	V
	* 11.511174	19.68	ADR	38.7	-18.4	2.96	42.94	54	-11.06	-	-	-	-	140	192	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL

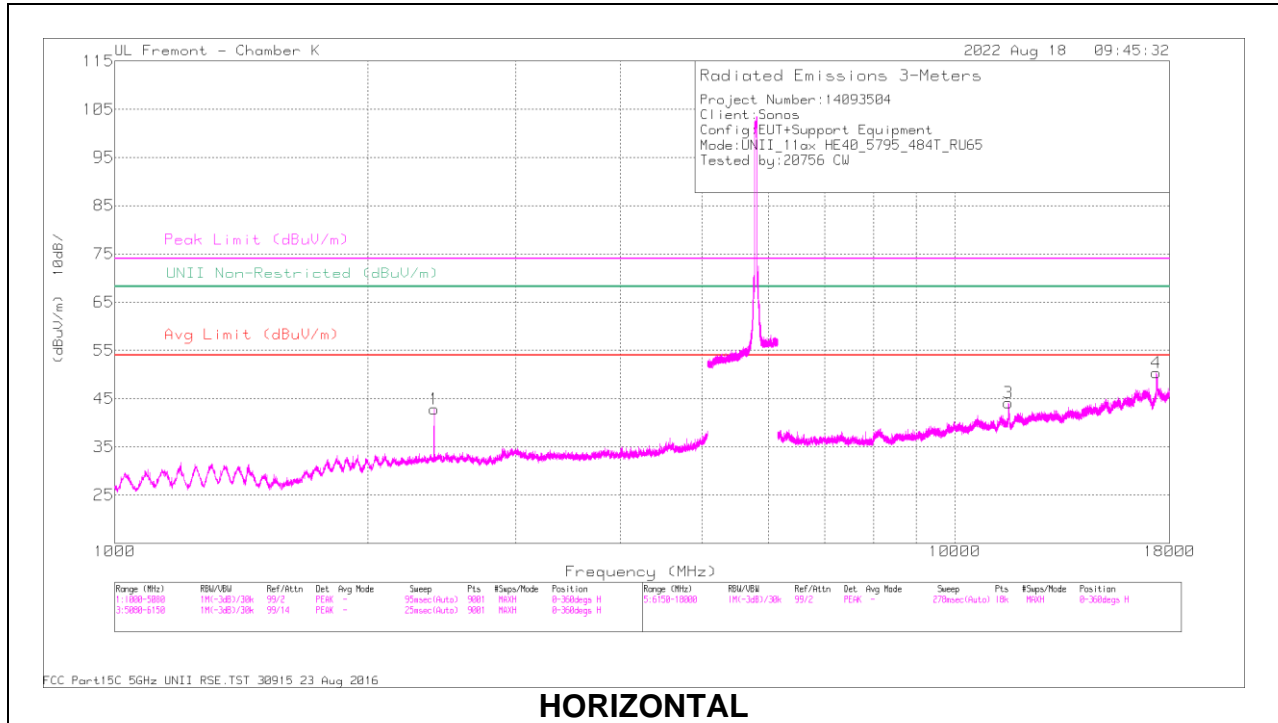

HORIZONTAL

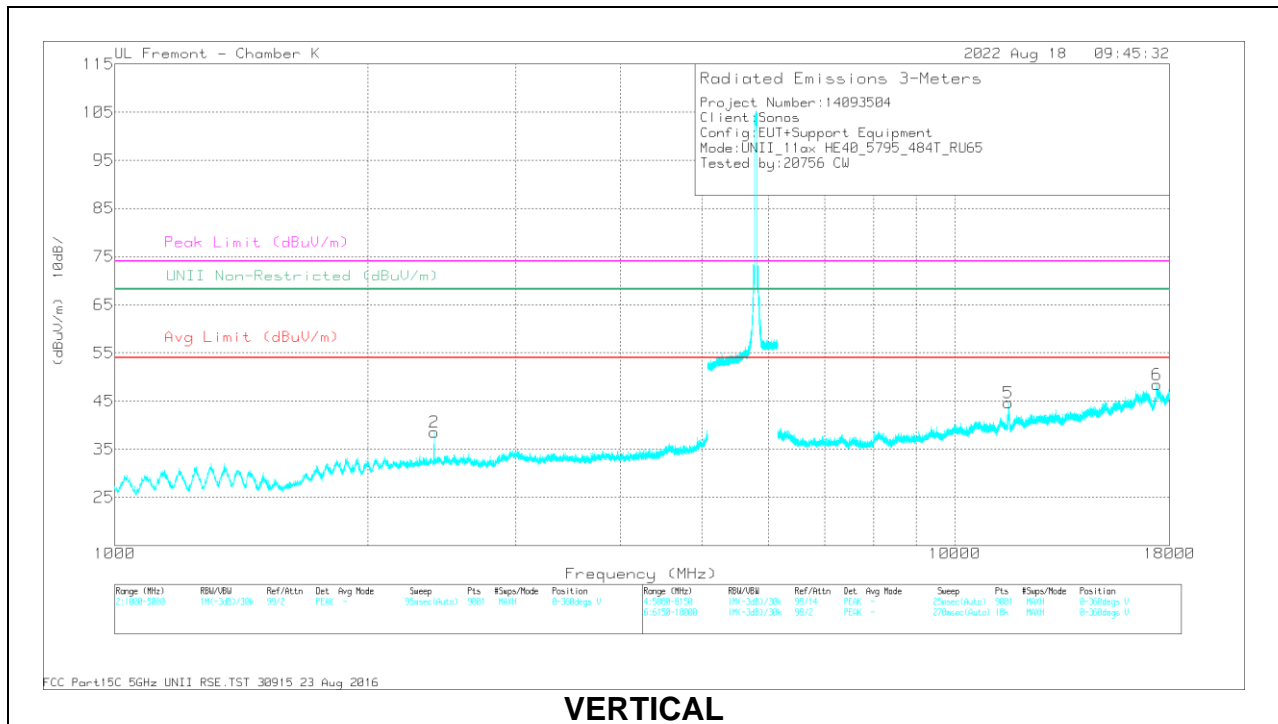

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) -3mH	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2399.864	64.87	PK-U	32.5	-44.6	0	52.77	-	-	-	-	68.2	-15.43	104	200	H
2	2399.669	59.5	PK-U	32.5	-44.6	0	47.4	-	-	-	-	68.2	-20.8	68	104	V
3	* 11579.172	52.68	PK-U	38.3	-35.6	0	55.38	-	-	74	-18.62	-	-	239	202	H
	* 11578.853	37.83	ADR	38.3	-35.6	2.96	43.49	54	-10.51	-	-	-	-	239	202	H
4	17374.719	53.23	PK-U	41.4	-31.2	0	63.43	-	-	-	-	68.2	-4.77	51	209	H
5	* 11585.061	53.21	PK-U	38.3	-35.6	0	55.91	-	-	74	-18.09	-	-	57	107	V
	* 11584.33	37.96	ADR	38.3	-35.6	2.96	43.62	54	-10.38	-	-	-	-	57	107	V
6	17395.534	48.91	PK-U	41.4	-31.3	0	59.01	-	-	-	-	68.2	-9.19	243	130	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.12. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE 5.8GHz BAND

2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 0

BANDEDGE (CHANNEL 155 LOW CHANNEL EDGE)

HORIZONTAL RESULT

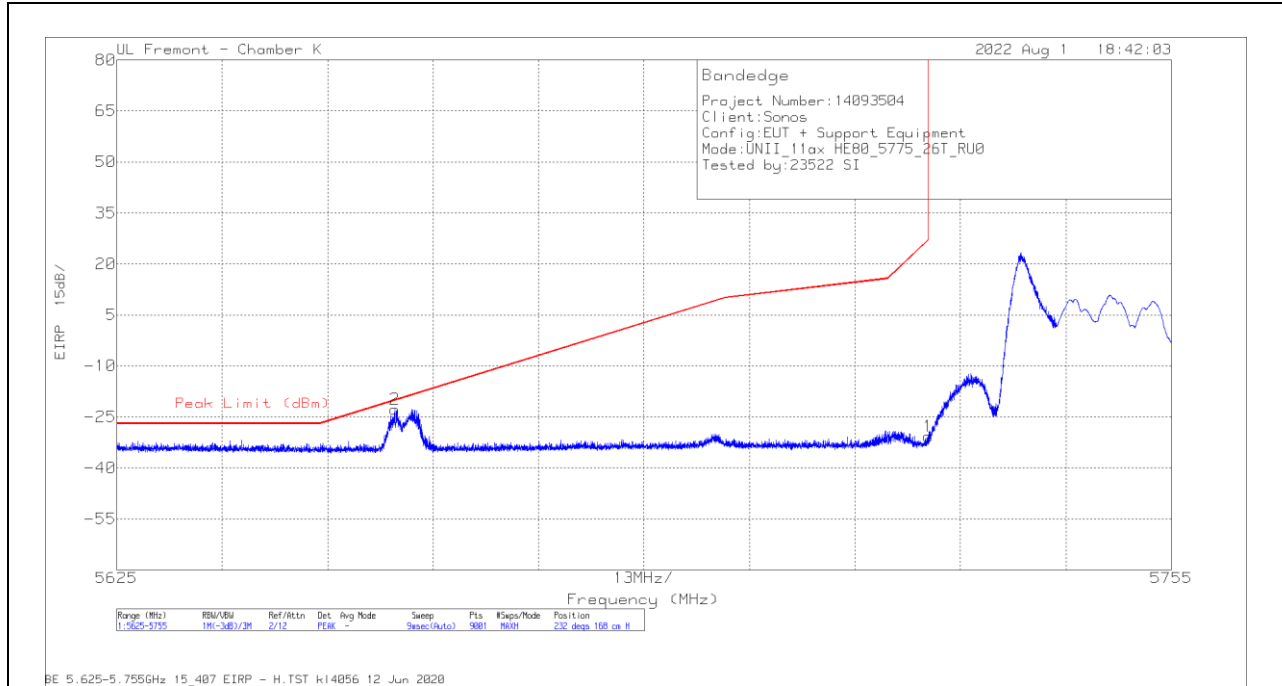


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	-70.68	Pk	34.8	-6.7	11.8	-30.78	27	-57.78	232	168	H
2	5659.276	-62.28	Pk	34.8	-7.1	11.8	-22.78	-20.14	-2.64	232	168	H

Pk - Peak detector

VERTICAL RESULT

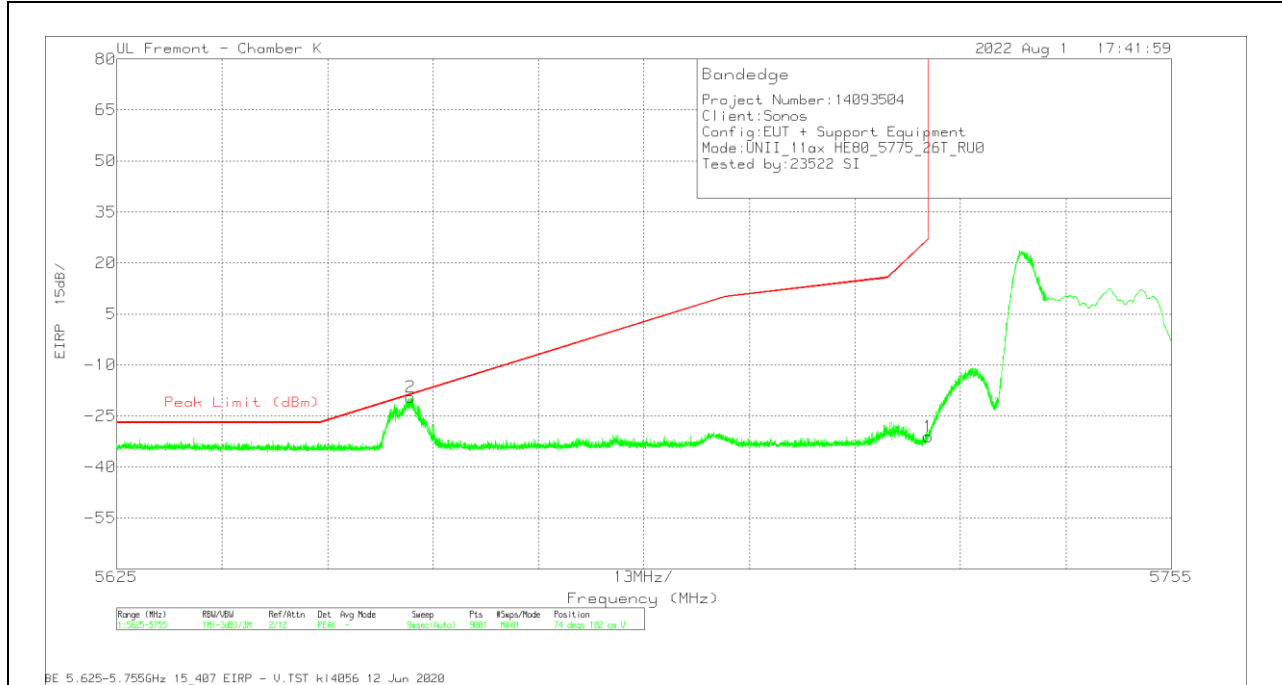


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	80402 ACF(dB) -3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	-70.9	Pk	34.8	-6.7	11.8	-31	27	-58	74	182	V
2	5661.254	-59.01	Pk	34.8	-7.1	11.8	-19.51	-18.67	-84	74	182	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL

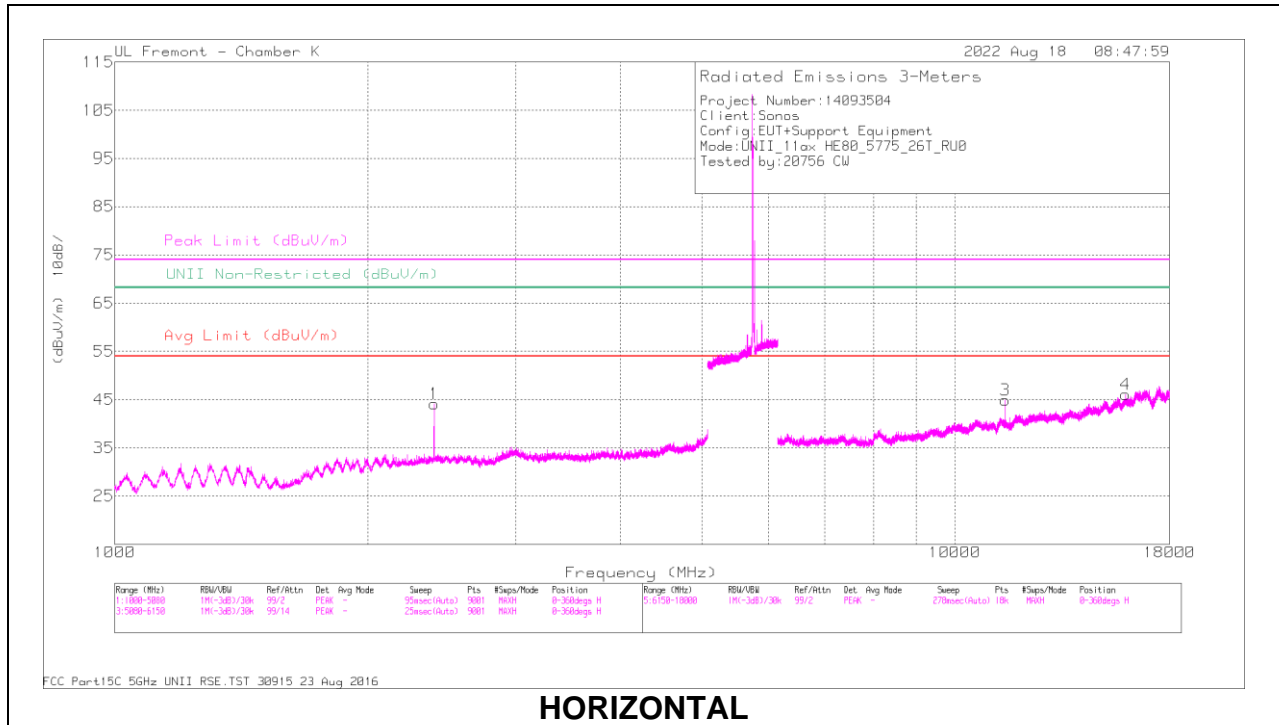

HORIZONTAL

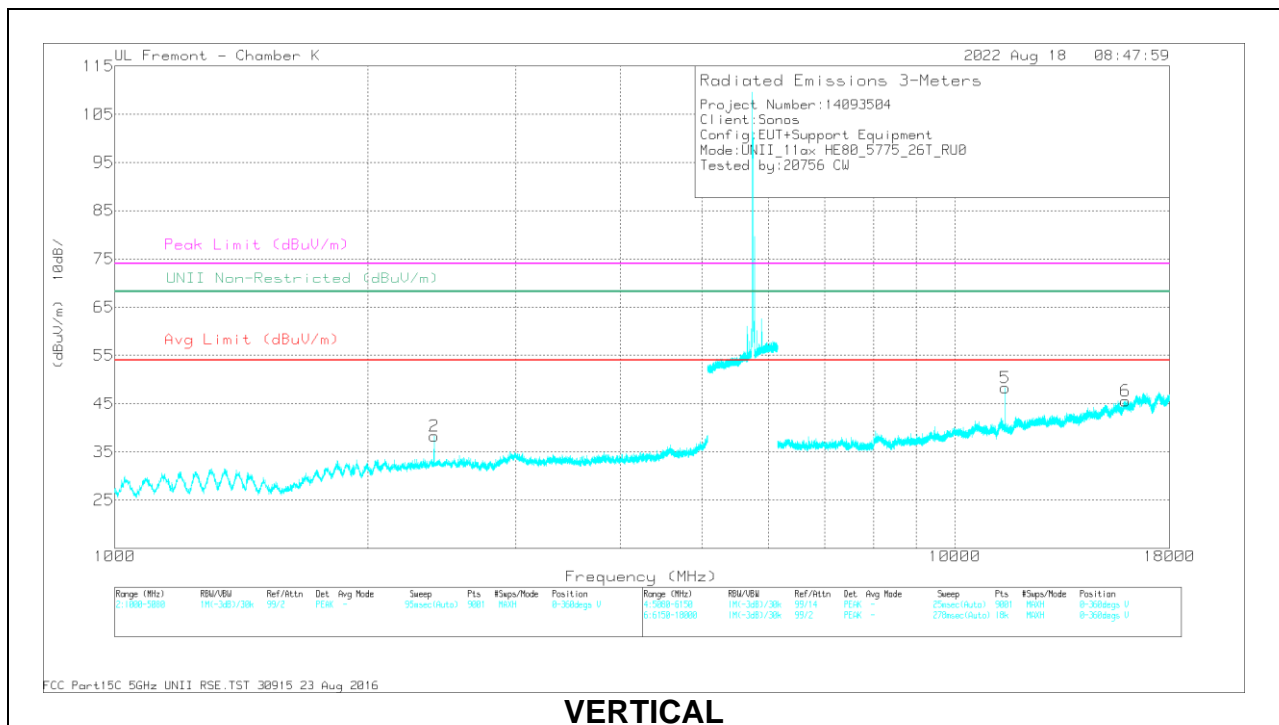

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) -3mH	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2399.657	63.97	PK-U	32.5	-44.6	0	51.87	-	-	-	-	68.2	-16.33	99	314	H
2	2400.18	62.03	PK-U	32.5	-44.6	0	49.93	-	-	-	-	68.2	-18.27	19	242	V
3	* 11474.79	58.28	PK-U	38.2	-35.9	0	60.58	-	-	74	-13.42	-	-	213	200	H
	* 11474.202	41.31	ADR	38.2	-35.9	2.01	45.62	54	-8.38	-	-	-	-	213	200	H
4	* 15952.001	47.59	PK-U	41	-33	0	55.59	-	-	74	-18.41	-	-	141	199	H
	* 15952.188	35.06	ADR	41	-33	2.01	45.07	54	-8.93	-	-	-	-	141	199	H
5	* 11474.555	59.8	PK-U	38.2	-35.9	0	62.1	-	-	74	-11.9	-	-	131	193	V
	* 11474.231	43.49	ADR	38.2	-35.9	2.01	47.8	54	-6.2	-	-	-	-	131	193	V
6	* 15950.549	47.37	PK-U	41	-32.9	0	55.47	-	-	74	-18.53	-	-	106	383	V
	* 15950.879	35.41	ADR	41	-32.9	2.01	45.52	54	-8.48	-	-	-	-	106	383	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 36

BANDEDGE (CHANNEL 155 HIGH CHANNEL EDGE)

HORIZONTAL RESULT

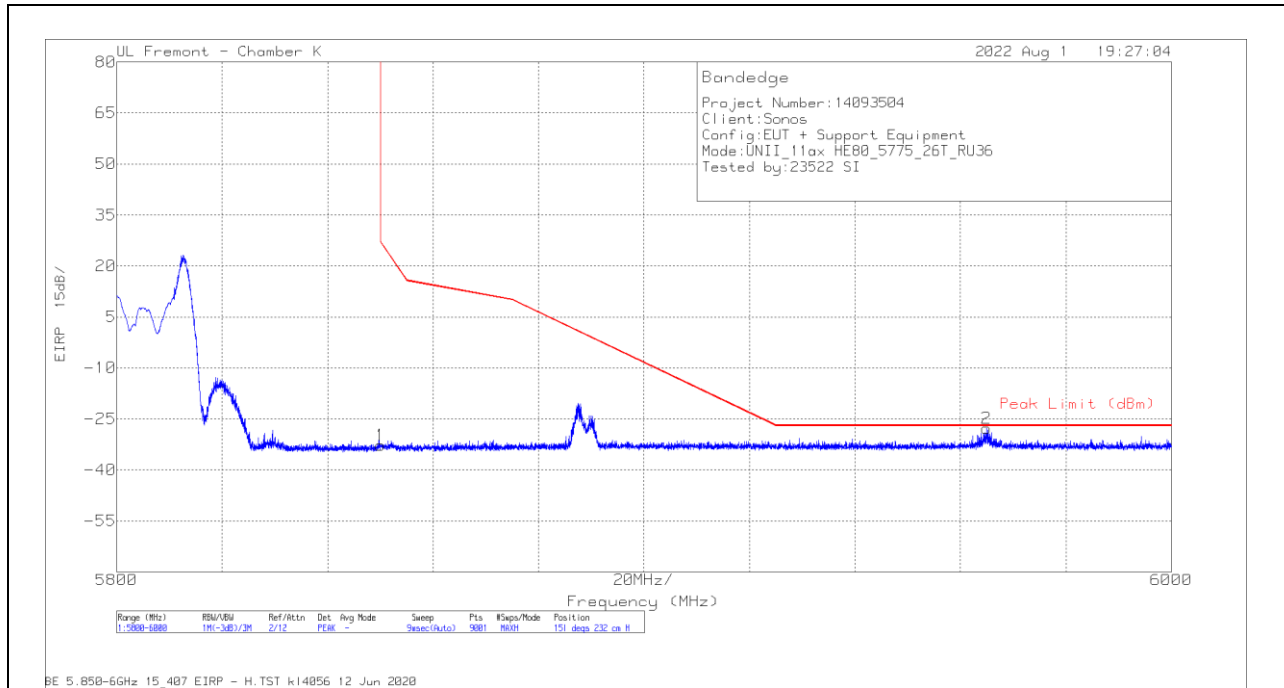


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-72.76	Pk	34.9	-6.6	11.8	-32.66	27	-59.66	151	232	H
2	5964.998	-68.52	Pk	35.2	-6.2	11.8	-27.72	-27	-.72	151	232	H

Pk - Peak detector

VERTICAL RESULT

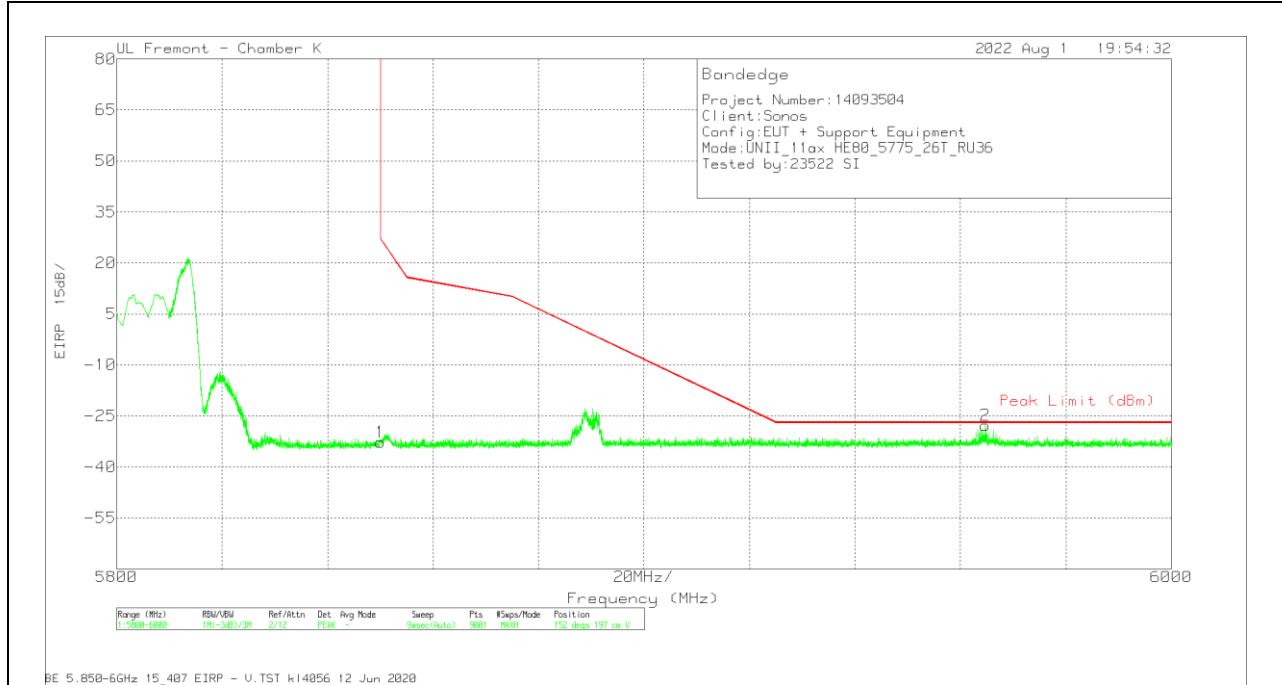

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBm)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-72.89	Pk	34.9	-6.6	11.8	-32.79	27	-59.79	152	197	V
2	5964.687	-68.61	Pk	35.2	-6.2	11.8	-27.81	-27	-81	152	197	V

Pk - Peak detector

2TX Antenna 1 + Antenna 4 OFDMA MODE: 996-Tones, RU Index 67

BANDEDGE (CHANNEL 155 LOW CHANNEL EDGE)

HORIZONTAL RESULT

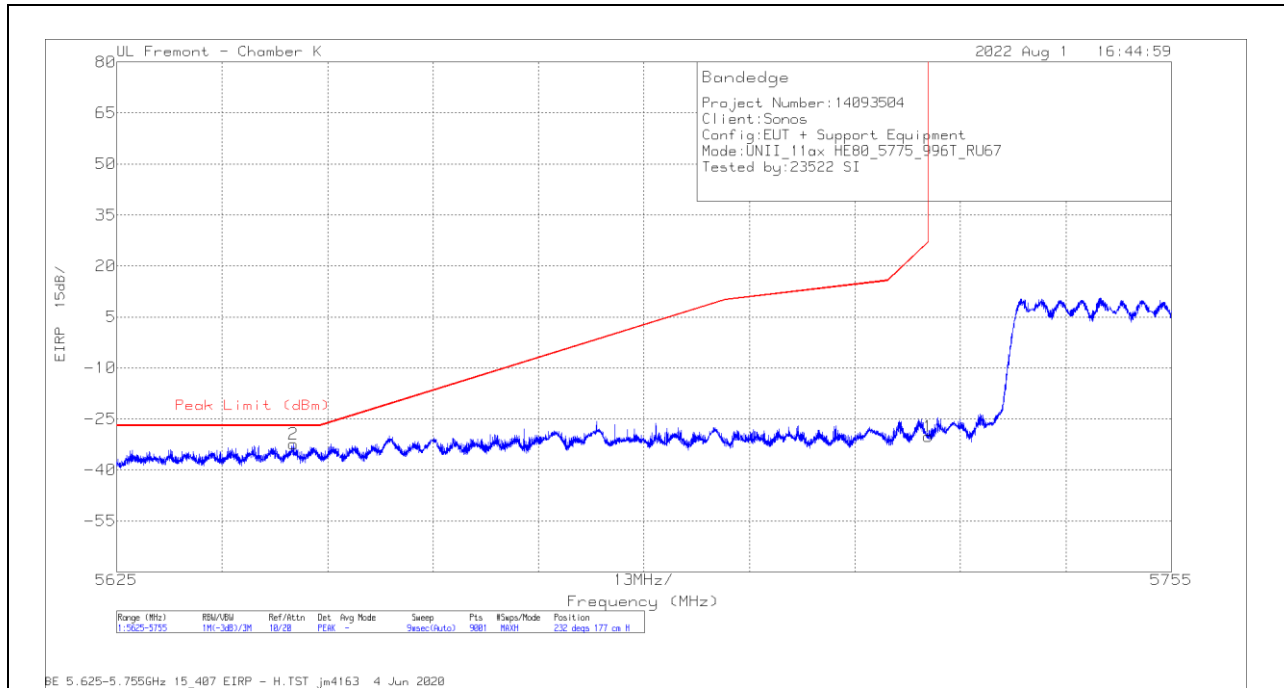


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	-46.61	Pk	34.8	-30.1	11.8	-30.11	27	-57.11	232	177	H
2	5646.825	-48.82	Pk	34.8	-30.2	11.8	-32.42	-27	-5.42	232	177	H

Pk - Peak detector

VERTICAL RESULT

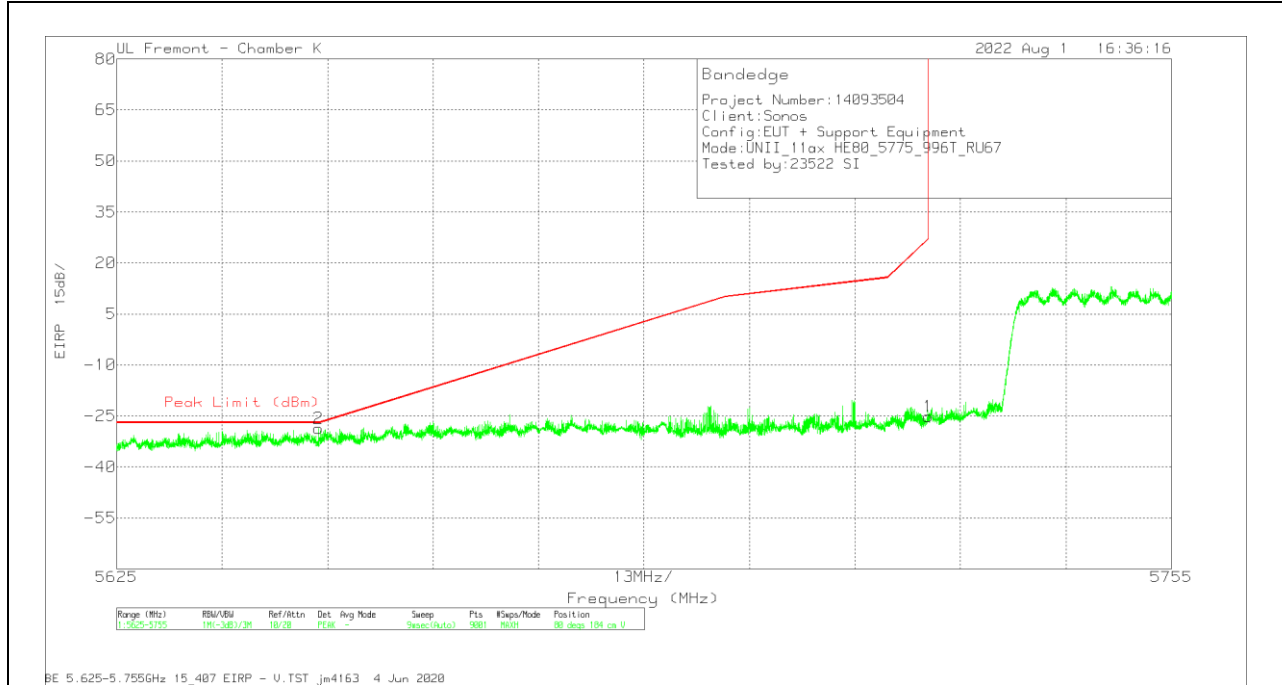


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	-41.64	Pk	34.8	-30.1	11.8	-25.14	27	-52.14	80	184	V
2	5649.916	-45.06	Pk	34.8	-30.2	11.8	-28.66	-27	-1.66	80	184	V

Pk - Peak detector

BANDEDGE (CHANNEL 155 HIGH CHANNEL EDGE)

HORIZONTAL RESULT

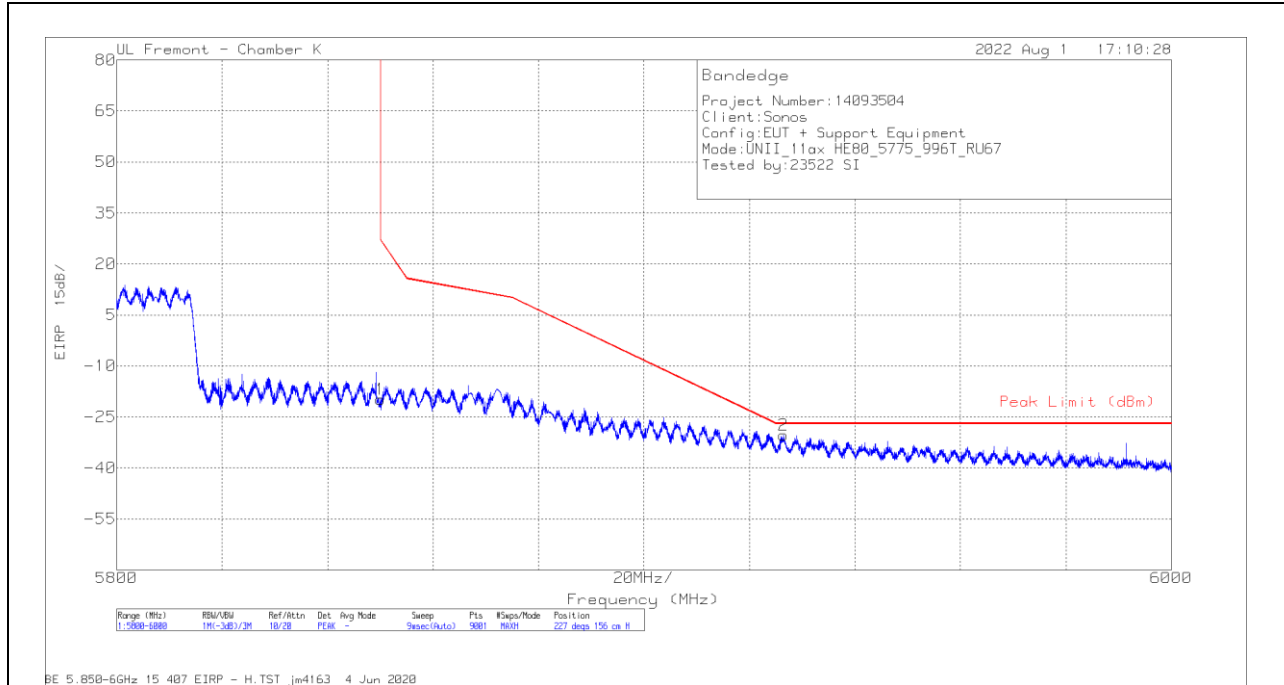


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-36.58	Pk	34.9	-29.9	11.8	-19.78	27	-46.78	227	156	H
2	5926.443	-47.38	Pk	35.1	-29.8	11.8	-30.28	-27	-3.28	227	156	H

Pk - Peak detector

VERTICAL RESULT

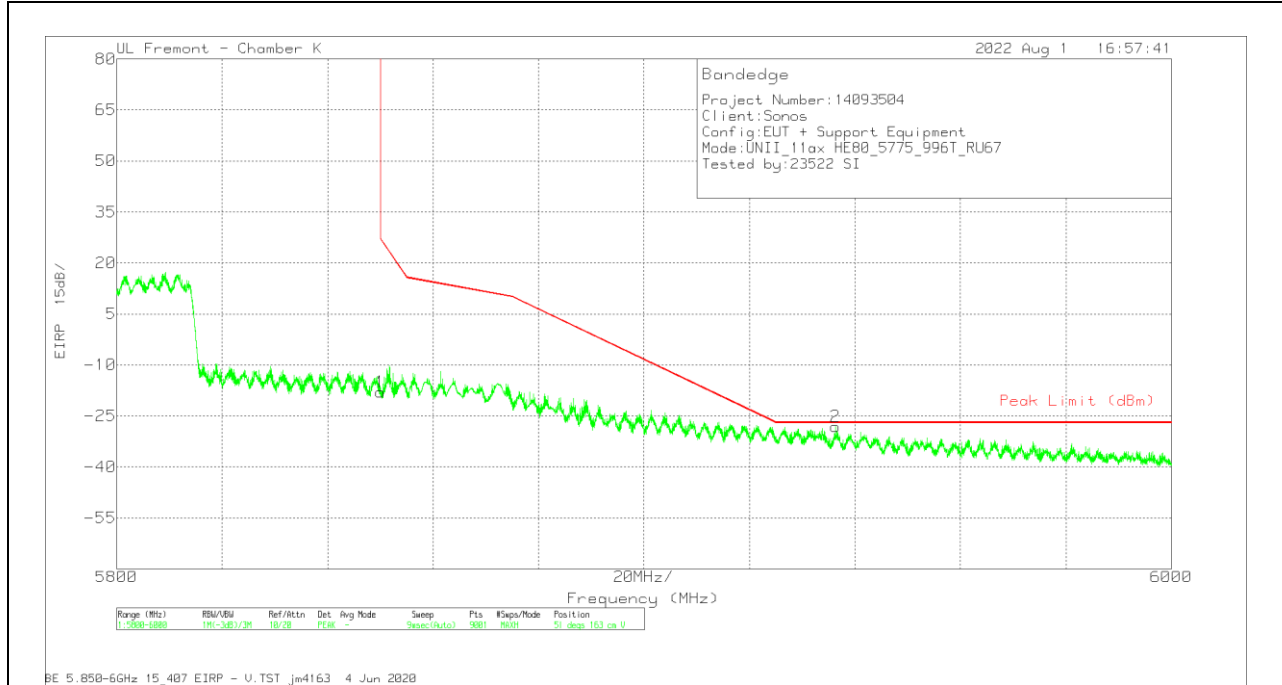


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5850	-34.74	Pk	34.9	-29.9	11.8	-17.94	27	-44.94	51	163	V
2	5936.332	-45.31	Pk	35.2	-29.9	11.8	-28.21	-27	-1.21	51	163	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL

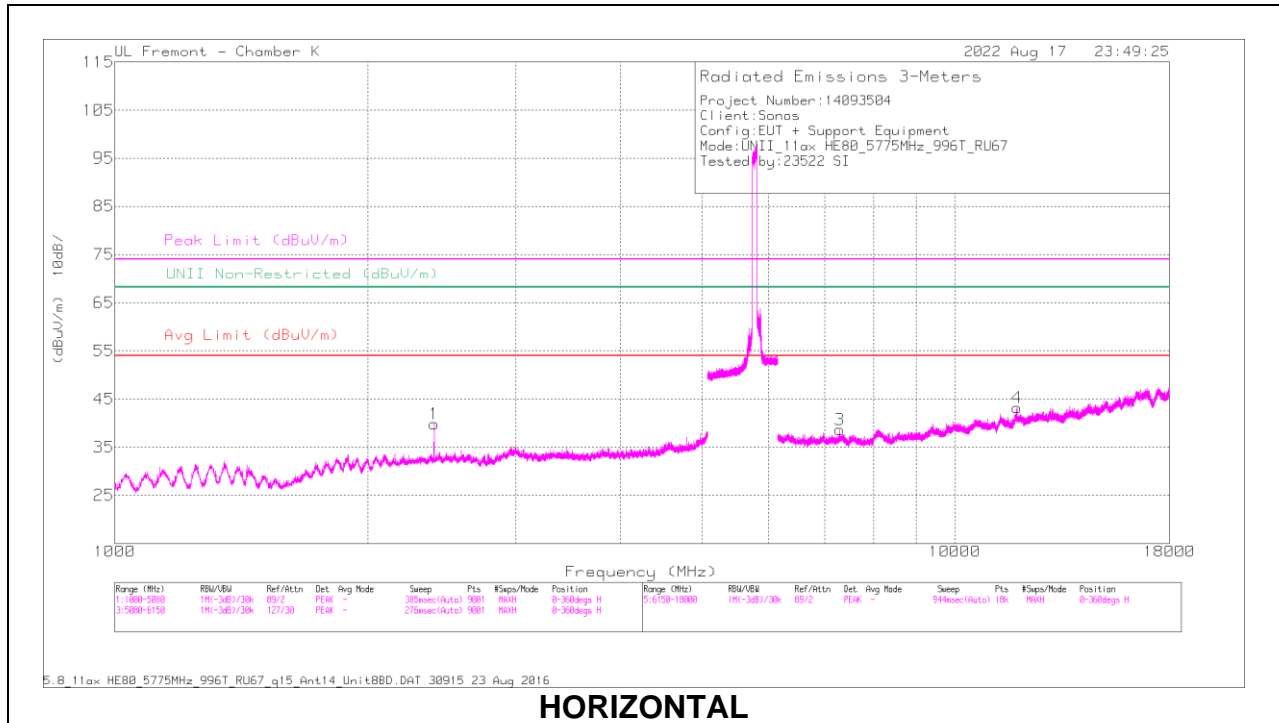

HORIZONTAL

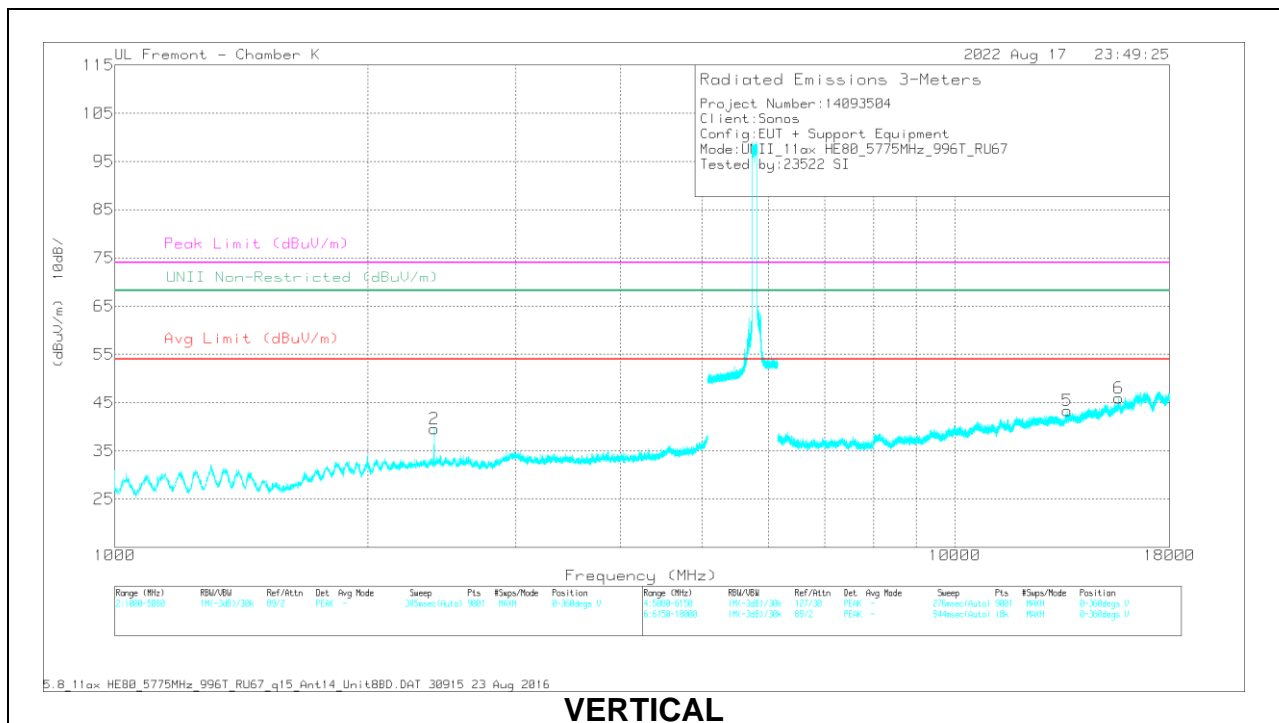

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) -3mH	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.02	61.76	PK-U	32.5	-44.6	0	49.66	-	-	-	-	68.2	-18.54	99	191	H
2	2400.624	60.8	PK-U	32.5	-44.7	0	48.6	-	-	-	-	68.2	-19.6	60	103	V
3	* 7294.795	48.76	PK-U	35.7	-37.2	0	47.26	-	-	74	-26.74	-	-	277	332	H
	* 7296.733	36.8	ADR	35.7	-37.2	3.29	38.59	54	-15.41	-	-	-	-	277	332	H
4	* 11847.907	47.68	PK-U	38.5	-34.9	0	51.28	-	-	74	-22.72	-	-	10	387	H
	* 11850.185	35.66	ADR	38.5	-35	3.29	42.45	54	-11.55	-	-	-	-	10	387	H
5	13616.602	47.24	PK-U	38.8	-34.4	0	51.64	-	-	-	-	68.2	-16.56	209	299	V
6	* 15652.059	47.15	PK-U	40.5	-33	0	54.65	-	-	74	-19.35	-	-	145	200	V
	* 15652.318	35.18	ADR	40.5	-33.1	3.29	45.87	54	-8.13	-	-	-	-	145	200	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

10.2. WORST CASE BELOW 30MHz

SPURIOUS EMISSIONS BELOW 30 MHz (WORST-CASE CONFIGURATION)

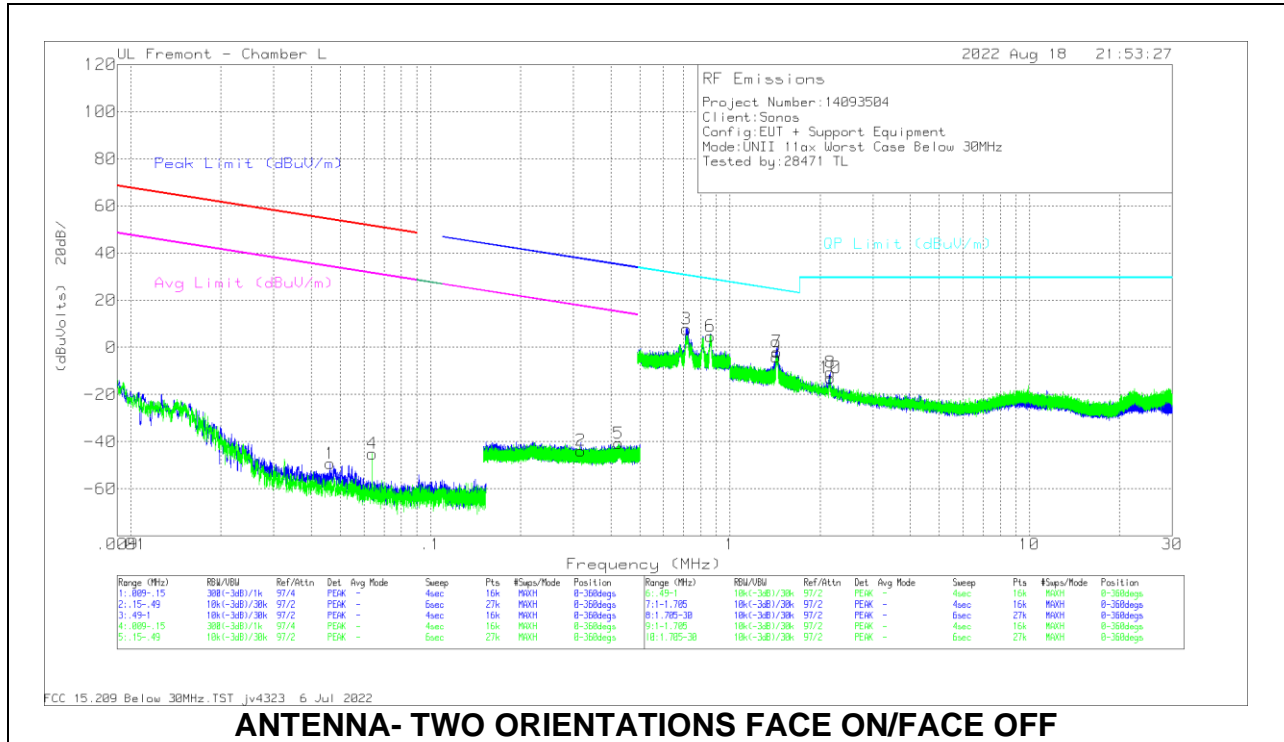



ANTENNA- TWO ORIENTATIONS FACE ON/FACE OFF

Below 30MHz Data

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna E(ACF)	Amp/Cbl (dB)	Dist Corr 300m	Corrected Reading (dBuVolts)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	QP Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
1	.0462	5.4	Pk	57.1	-31.8	-80	-49.3	54.29	-103.59	34.29	-83.59	-	-	-	-	-	-	0-360
2	.3177	11.97	Pk	56.2	-32	-80	-43.83	-	-	-	-	-	-	37.57	-81.4	17.57	-61.4	0-360
4	.0639	10.69	Pk	56.1	-31.9	-80	-45.11	51.47	-96.58	31.47	-76.58	-	-	-	-	-	-	0-360
5	.4251	15.05	Pk	56.1	-31.9	-80	-40.75	-	-	-	-	-	-	35.04	-75.79	15.04	-55.79	0-360
3	.7161	23.45	Pk	56.2	-31.9	-40	7.75	-	-	-	-	30.51	-22.76	-	-	-	-	0-360
6	.8598	20.4	Pk	56.2	-31.9	-40	4.7	-	-	-	-	28.93	-24.23	-	-	-	-	0-360
7	1.4353	25.32	Pk	44.6	-31.9	-40	-1.98	-	-	-	-	24.49	-26.47	-	-	-	-	0-360
8	2.1619	19.92	Pk	41.2	-31.8	-40	-10.68	-	-	-	-	29.5	-40.18	-	-	-	-	0-360
9	1.4281	23.12	Pk	44.7	-31.9	-40	-4.08	-	-	-	-	24.53	-28.61	-	-	-	-	0-360
10	2.163	17.72	Pk	41.2	-31.8	-40	-12.88	-	-	-	-	29.5	-42.38	-	-	-	-	0-360

Pk - Peak detector

10.3. WORST CASE BELOW 1 GHz

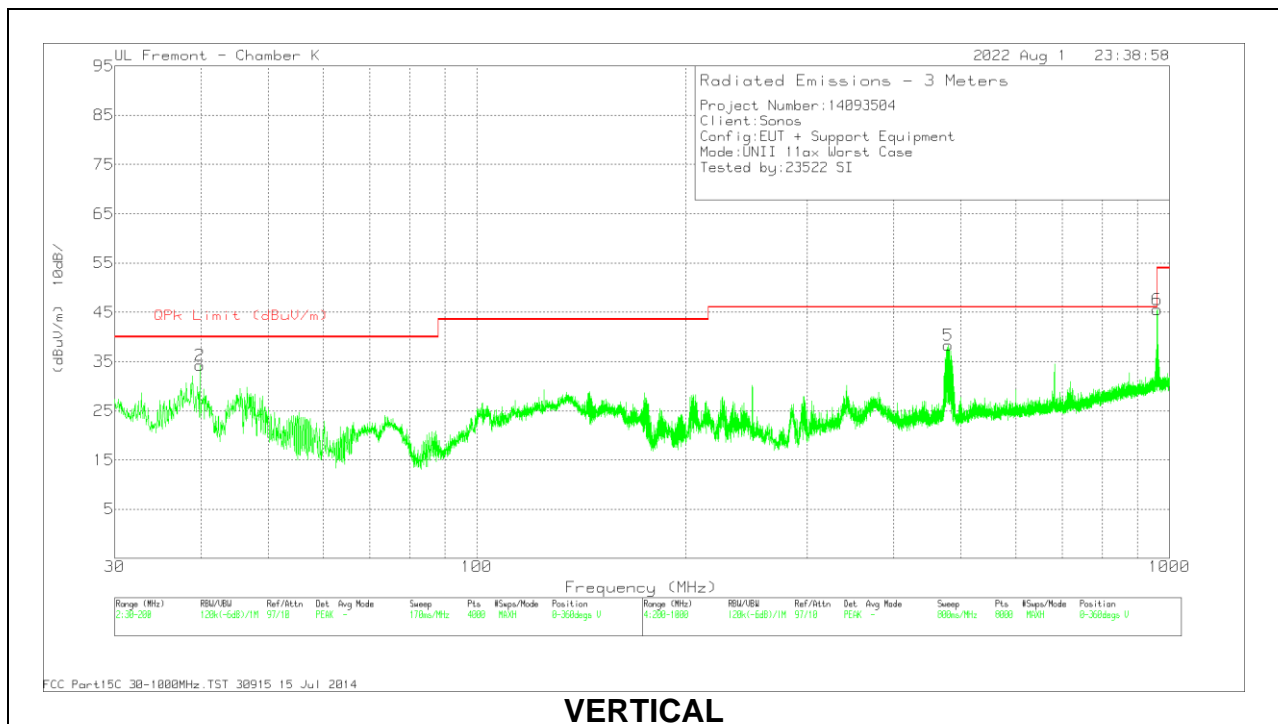
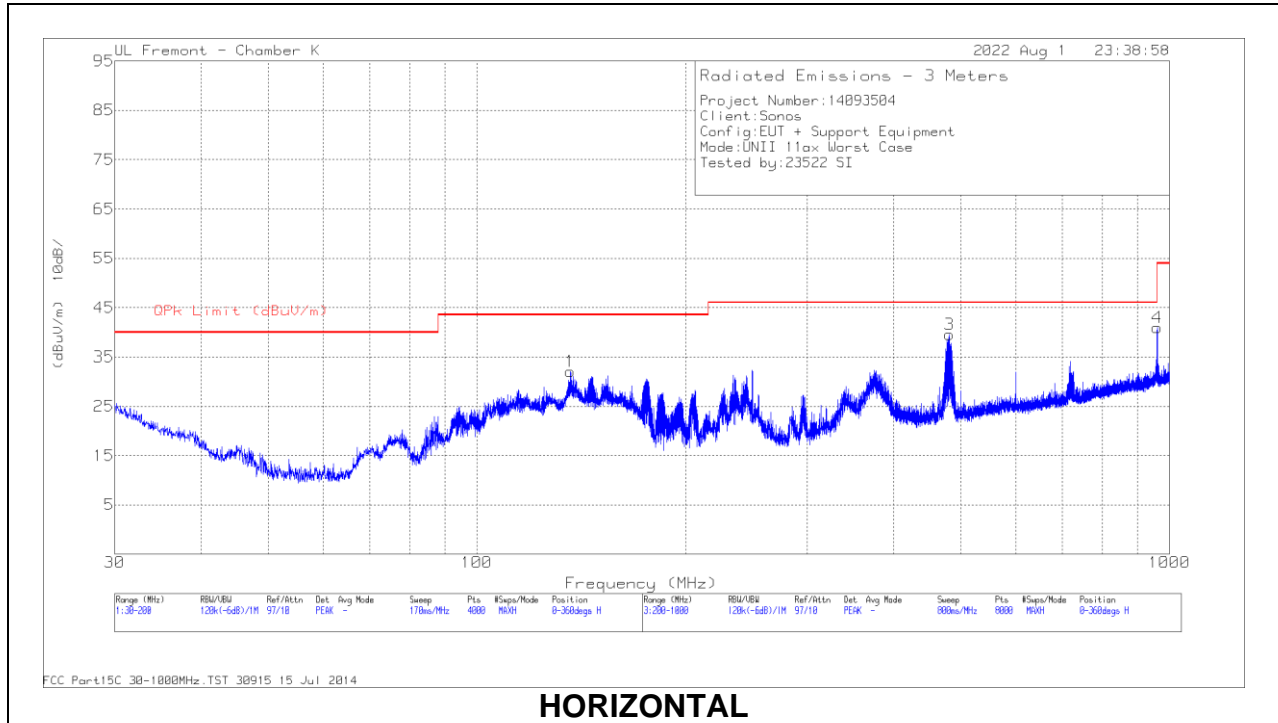


Below 1GHz DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	82258 ACF (dB)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 136.575	43.09	Pk	19.7	-30.7	32.09	43.52	-11.43	0-360	197	H
2	39.6695	35.99	Qp	20.4	-31.4	24.99	40	-15.01	186	112	V
3	481.437	44.66	Pk	23.9	-29	39.56	46.02	-6.46	0-360	199	H
4	* 960.099	37.83	Pk	29.4	-26.3	40.93	53.97	-13.04	0-360	101	H
5	478.936	43.52	Pk	23.9	-29.1	38.32	46.02	-7.7	0-360	98	V
6	* 960.099	42.4	Pk	29.4	-26.3	45.5	53.97	-8.47	0-360	98	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 Qp - Quasi-Peak detector

10.4. WORST CASE 18-26 GHz

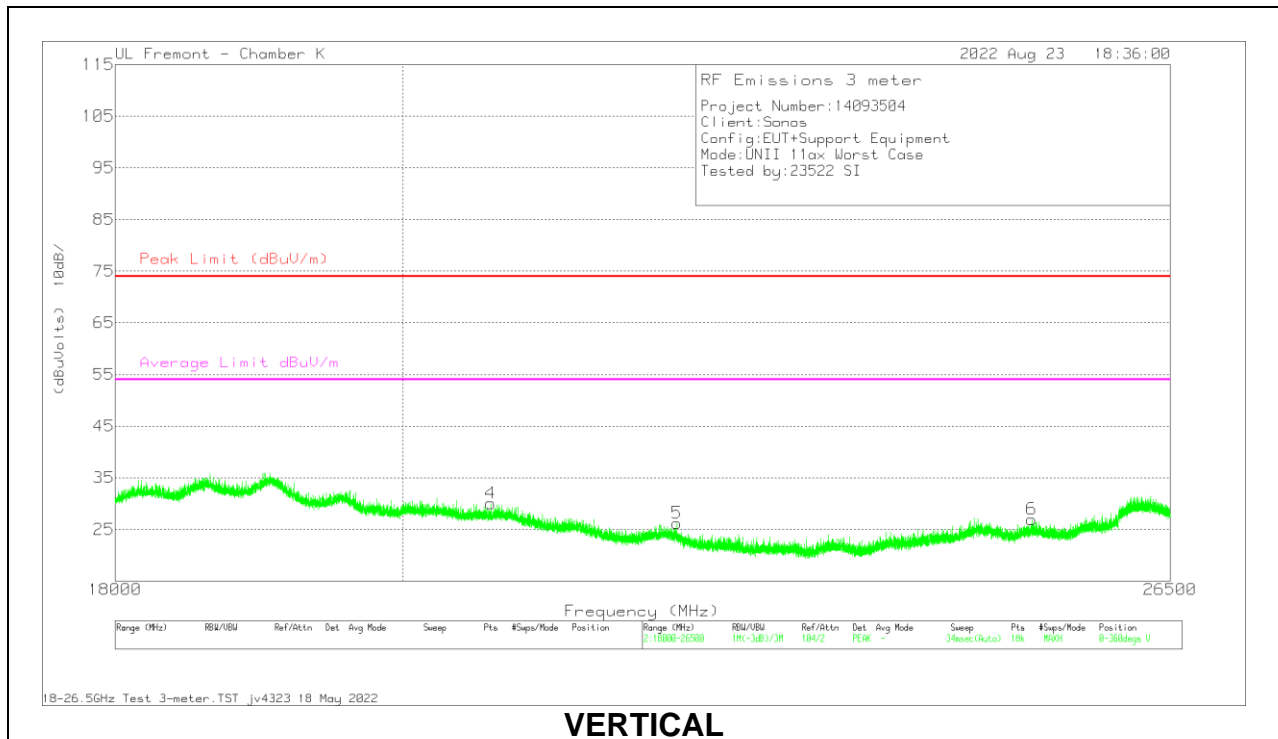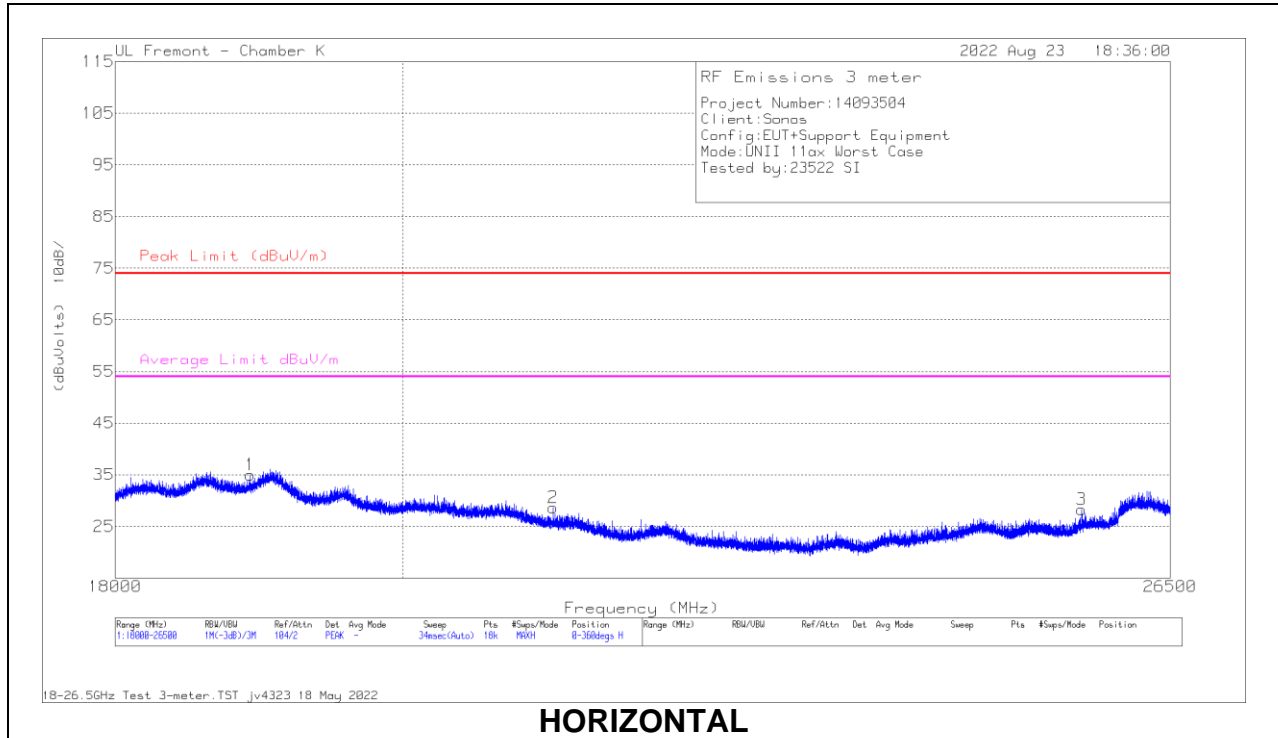



18 – 26GHz DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	81138 AF (dB/m)	215705 amp/cbl (dB)	Cables (dB)	Corrected Reading (dBuVolts)	Peak Limit (dBuV/m)	PK Margin (dB)	Average Limit dBuV/m	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 18912.805	45.07	Pk	32.5	-60.6	18	34.97	74	-39.03	54	-19.03	0-360	199	H
2	* 21135.554	36.24	Pk	33.2	-59.8	19	28.64	74	-45.36	54	-25.36	0-360	100	H
3	25653.302	34.1	Pk	34.3	-61.1	21	28.3	74	-45.7	54	-25.7	0-360	199	H
4	* 20655.777	37.73	Pk	33.1	-59.6	18.8	30.03	74	-43.97	54	-23.97	0-360	200	V
5	* 22116.831	34.11	Pk	33.5	-60.8	19.4	26.21	74	-47.79	54	-27.79	0-360	200	V
6	25186.747	32.97	Pk	34.4	-61.2	20.8	26.97	74	-47.03	54	-27.03	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

10.5. WORST CASE 26-40 GHz

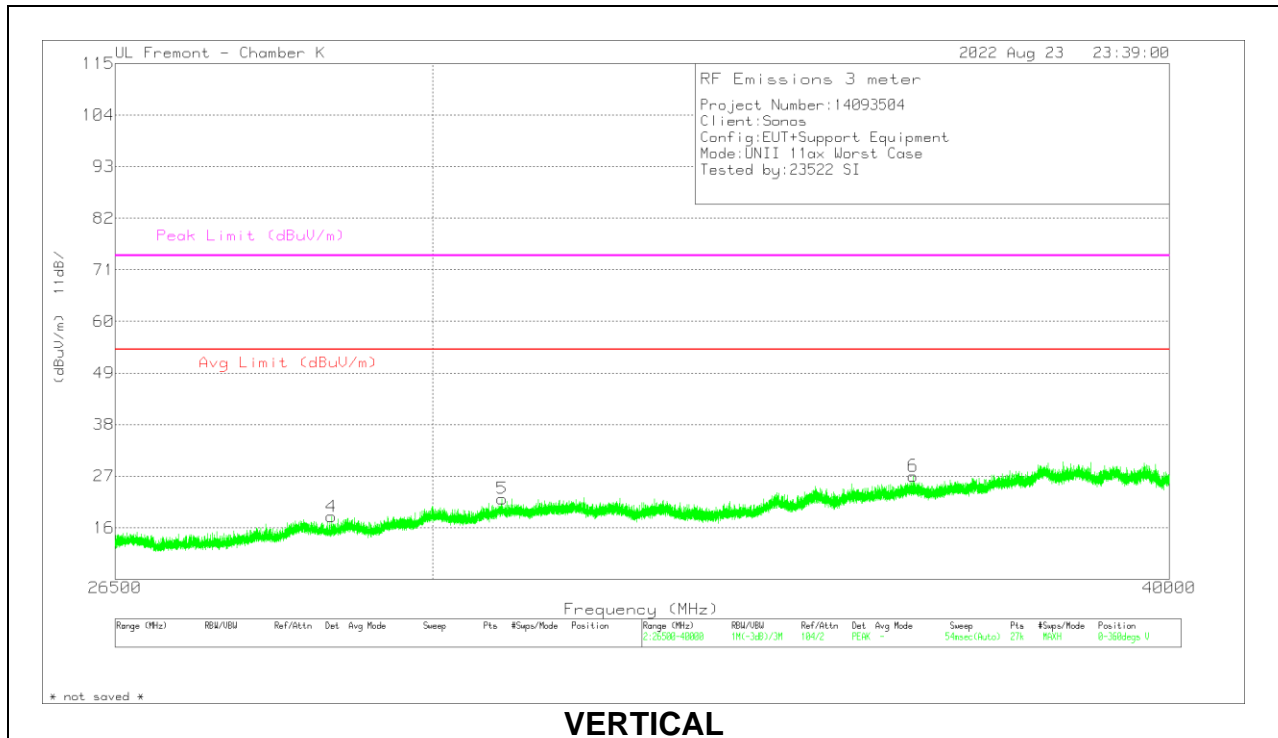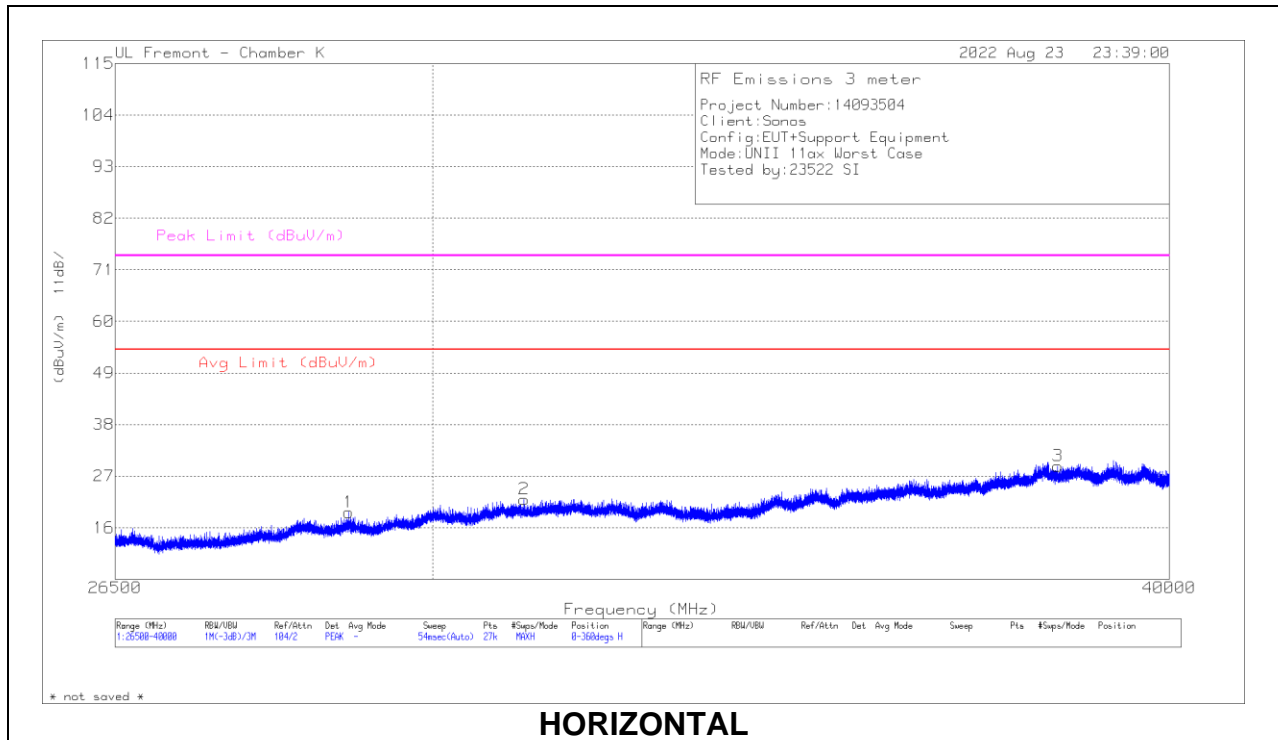

26 – 40GHz DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	81104 AF (dB/m)	172345 amp/cbl (dB)	Cables (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	29029.5	32.58	Pk	36.1	-71.8	22.4	19.28	54	-34.72	74	-54.72	0-360	199	H
2	31089	32.06	Pk	36.3	-69.6	23.3	22.06	54	-31.94	74	-51.94	0-360	199	H
3	38294.5	33.26	Pk	38.2	-68.8	26.5	29.16	54	-24.84	74	-44.84	0-360	100	H
4	28835.5	31.97	Pk	36.1	-72	22.3	18.37	54	-35.63	74	-55.63	0-360	200	V
5	30823.5	32.99	Pk	36.2	-70.2	23.2	22.19	54	-31.81	74	-51.81	0-360	100	V
6	36191.5	36.5	Pk	37.6	-72.6	25.5	27	54	-27	74	-47	0-360	100	V

Pk - Peak detector

11. AC POWERLINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

AC POWER LINE


LINE 1 RESULTS

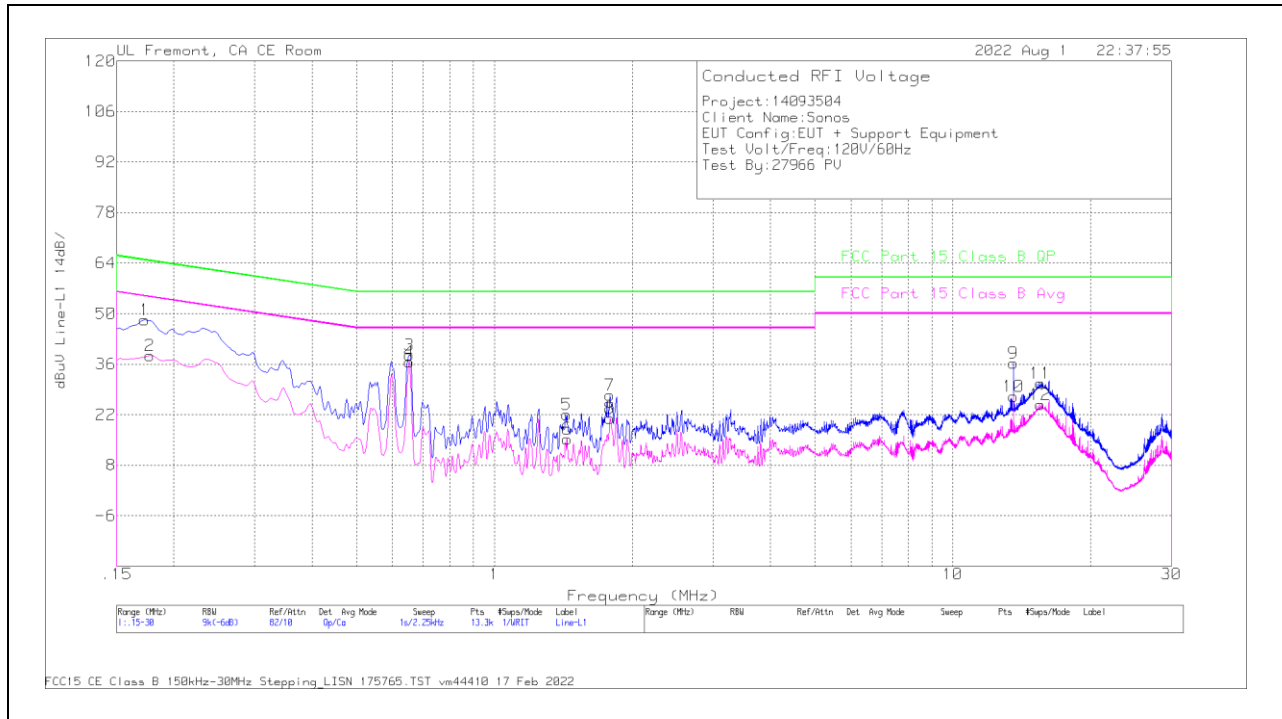

Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	175765 LISN L1	C1&C3 cable path loss	207996 Limiter with short cabl	Corrected Reading dBuV	FCC Part 15 Class B QP	QP Margin (dB)	FCC Part 15 Class B Avg	Av(CISPR)M argin (dB)
2	.177	28.83	Ca	.1	0	9.4	38.33	-	-	54.63	-16.3
4	.6518	27.23	Ca	0	.1	9.3	36.63	-	-	46	-9.37
6	1.4415	5.92	Ca	0	.1	9.3	15.32	-	-	46	-30.68
8	1.788	11.6	Ca	0	.1	9.3	21	-	-	46	-25
10	13.56	17.46	Ca	.1	.2	9.3	27.06	-	-	50	-22.94
12	15.5558	15.16	Ca	.1	.2	9.3	24.76	-	-	50	-25.24
1	.1725	38.75	Qp	.1	0	9.4	48.25	64.84	-16.59	-	-
3	.6529	29.12	Qp	0	.1	9.3	38.52	56	-17.48	-	-
5	1.4393	12.65	Qp	0	.1	9.3	22.05	56	-33.95	-	-
7	1.788	18.02	Qp	0	.1	9.3	27.42	56	-28.58	-	-
9	13.56	26.64	Qp	.1	.2	9.3	36.24	60	-23.76	-	-
11	15.5558	21.14	Qp	.1	.2	9.3	30.74	60	-29.26	-	-

Qp - Quasi-Peak detector
 Ca - CISPR average detection

LINE 2 RESULTS

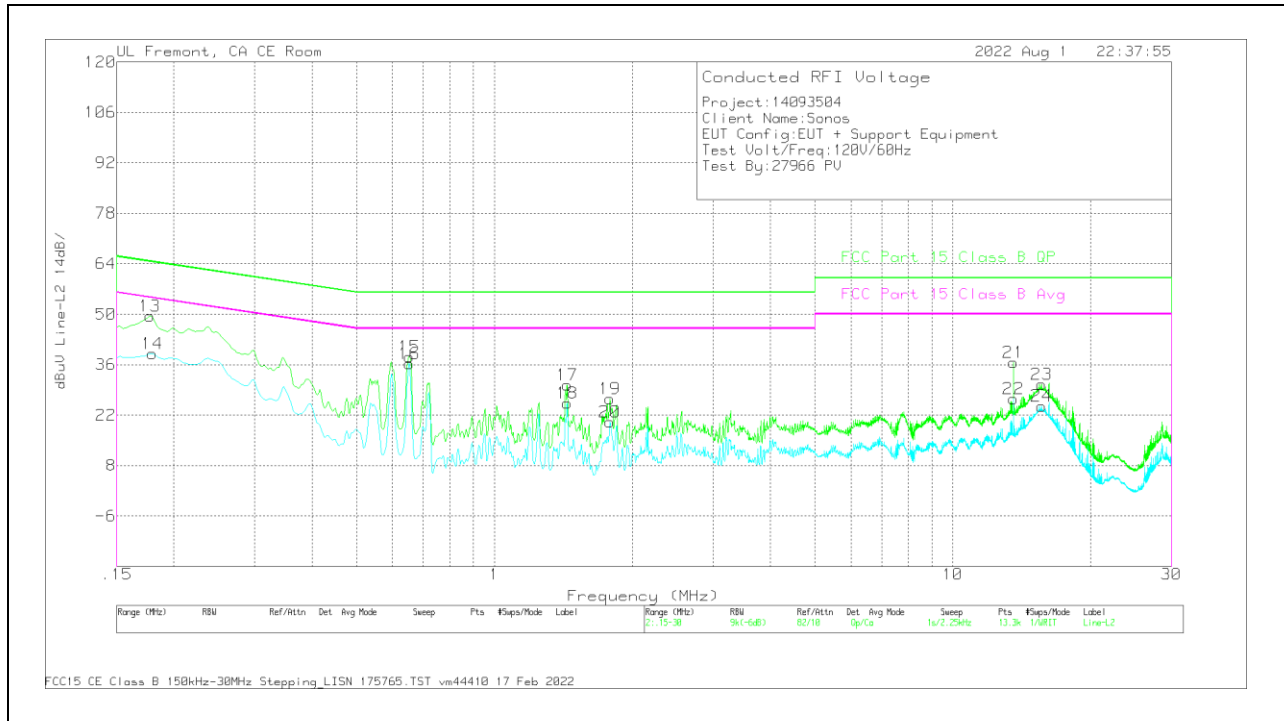

Range 2: Line-L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	175765 LISN L2	C2&C3 cable path loss	207996 Limiter with short cabl	Corrected Reading dBuV	FCC Part 15 Class B QP	QP Margin (dB)	FCC Part 15 Class B Avg	Av(CISPR)M argin (dB)	
14	.1793	29.53	Ca	.1	0	9.4	39.03	-	-	54.52	-15.49	
16	.6518	26.9	Ca	0	.1	9.3	36.3	-	-	46	-9.7	
18	1.4415	15.97	Ca	0	.1	9.3	25.37	-	-	46	-20.63	
20	1.788	10.63	Ca	0	.1	9.3	20.03	-	-	46	-25.97	
22	13.56	16.99	Ca	.1	.2	9.3	26.59	-	-	50	-23.41	
24	15.6165	14.93	Ca	.1	.2	9.3	24.53	-	-	50	-25.47	
13	.177	40.01	Qp	.1	0	9.4	49.51	64.63	-15.12	-	-	
15	.6518	28.77	Qp	0	.1	9.3	38.17	56	-17.83	-	-	
17	1.4415	20.97	Qp	0	.1	9.3	30.37	56	-25.63	-	-	
19	1.788	17.14	Qp	0	.1	9.3	26.54	56	-29.46	-	-	
21	13.56	26.97	Qp	.1	.2	9.3	36.57	60	-23.43	-	-	
23	15.6165	20.97	Qp	.1	.2	9.3	30.57	60	-29.43	-	-	

Qp - Quasi-Peak detector
 Ca - CISPR average detection