



HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

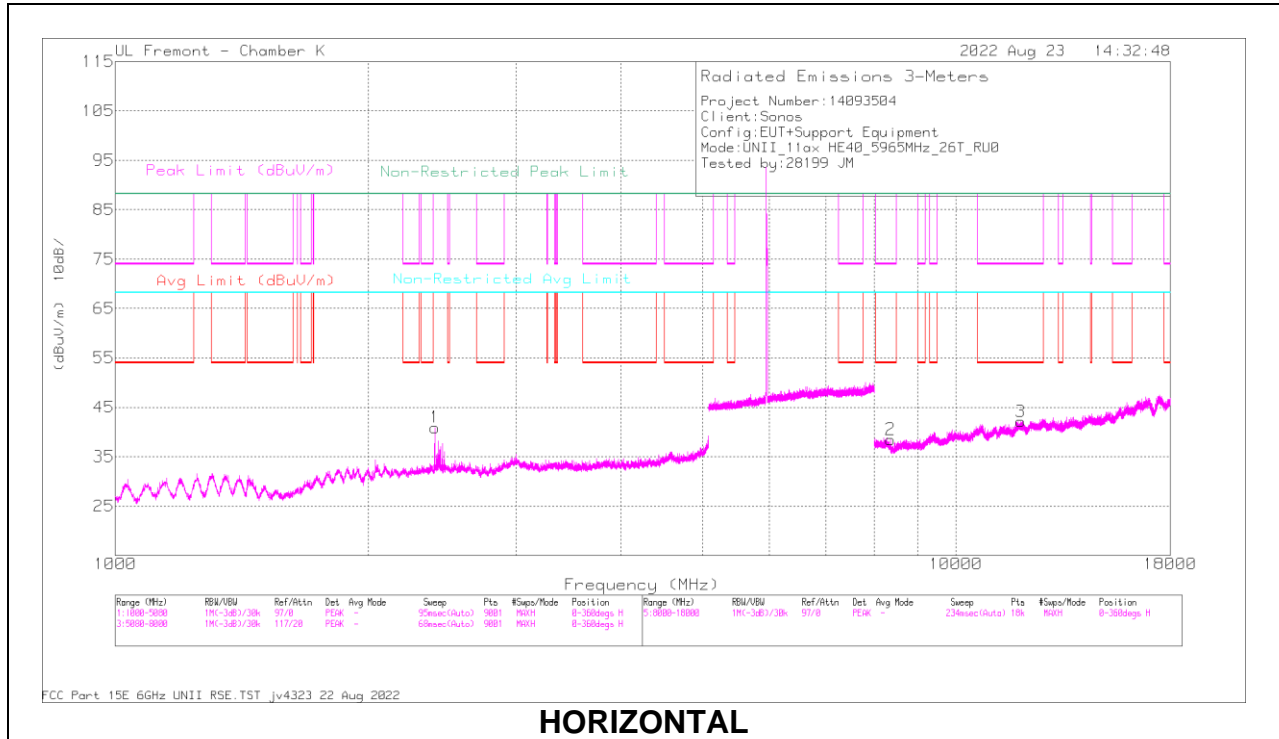

HORIZONTAL

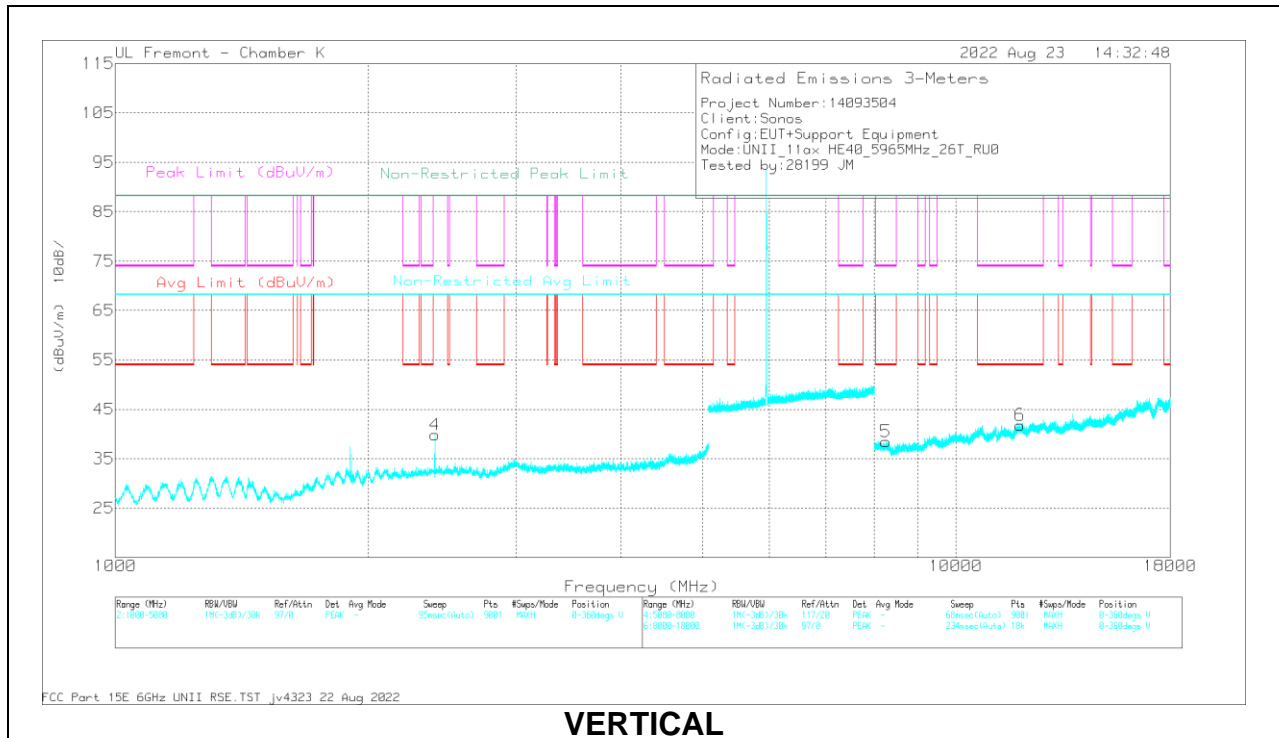

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.039	62.52	PK-U	32.5	-44.6	0	50.42	-	-	88.2	-37.78	186	196	H
	2399.999	53.23	ADR	32.5	-44.6	1.96	43.09	68.2	-25.11	-	-	186	196	H
2	* 8365.615	48.43	PK-U	35.7	-37.2	0	46.93	-	-	74	-27.07	286	192	H
	* 8365.064	37.01	ADR	35.7	-37.2	1.96	37.47	54	-16.53	-	-	286	192	H
3	* 11948.556	46.91	PK-U	38.7	-34.3	0	51.31	-	-	74	-22.69	141	345	H
	* 11949.415	35.38	ADR	38.7	-34.4	1.96	41.64	54	-12.36	-	-	141	345	H
4	2400.327	60.49	PK-U	32.5	-44.6	0	48.39	-	-	88.2	-39.81	179	107	V
	2400.102	51.47	ADR	32.5	-44.6	1.96	41.33	68.2	-26.87	-	-	179	107	V
5	* 8260.349	49.18	PK-U	35.7	-36.8	0	48.08	-	-	74	-25.92	232	98	V
	* 8260.441	37.3	ADR	35.7	-36.8	1.96	38.16	54	-15.84	-	-	232	98	V
6	* 11921.683	47.54	PK-U	38.6	-34.8	0	51.34	-	-	74	-22.66	82	369	V
	* 11921.519	35.83	ADR	38.6	-34.8	1.96	41.59	54	-12.41	-	-	82	369	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 8

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL

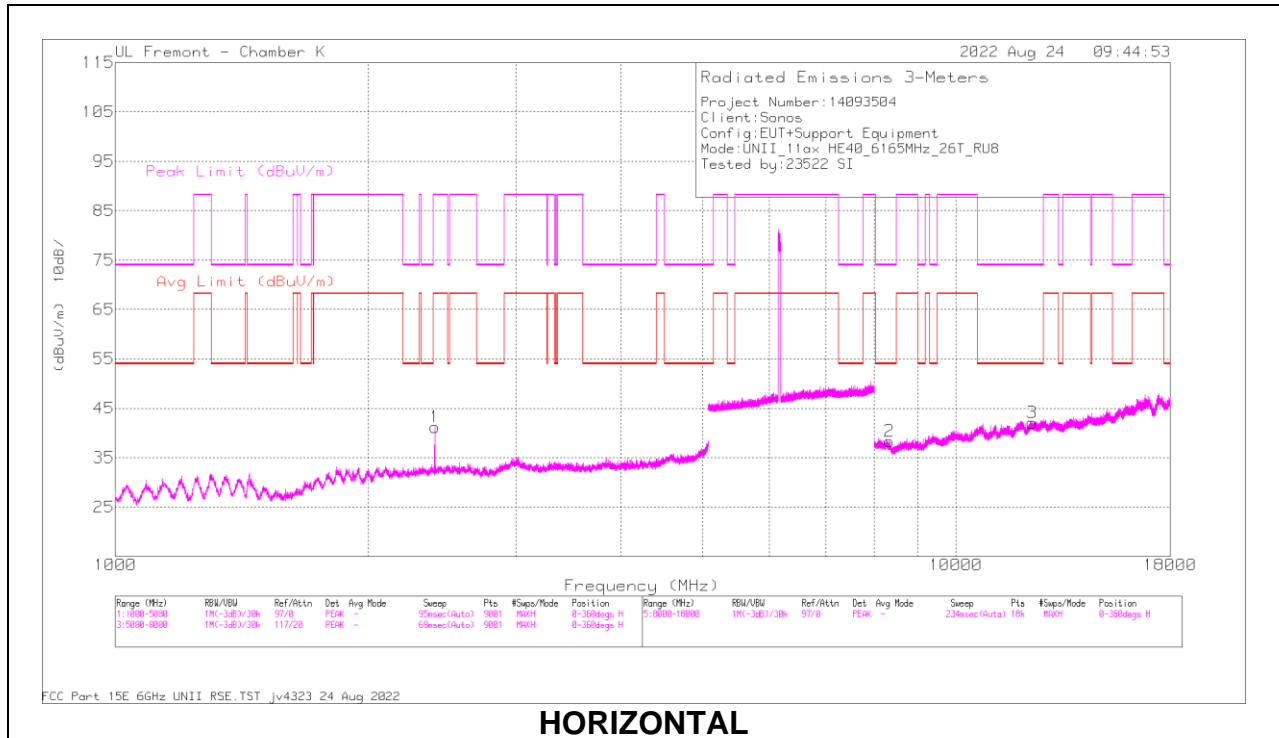

HORIZONTAL

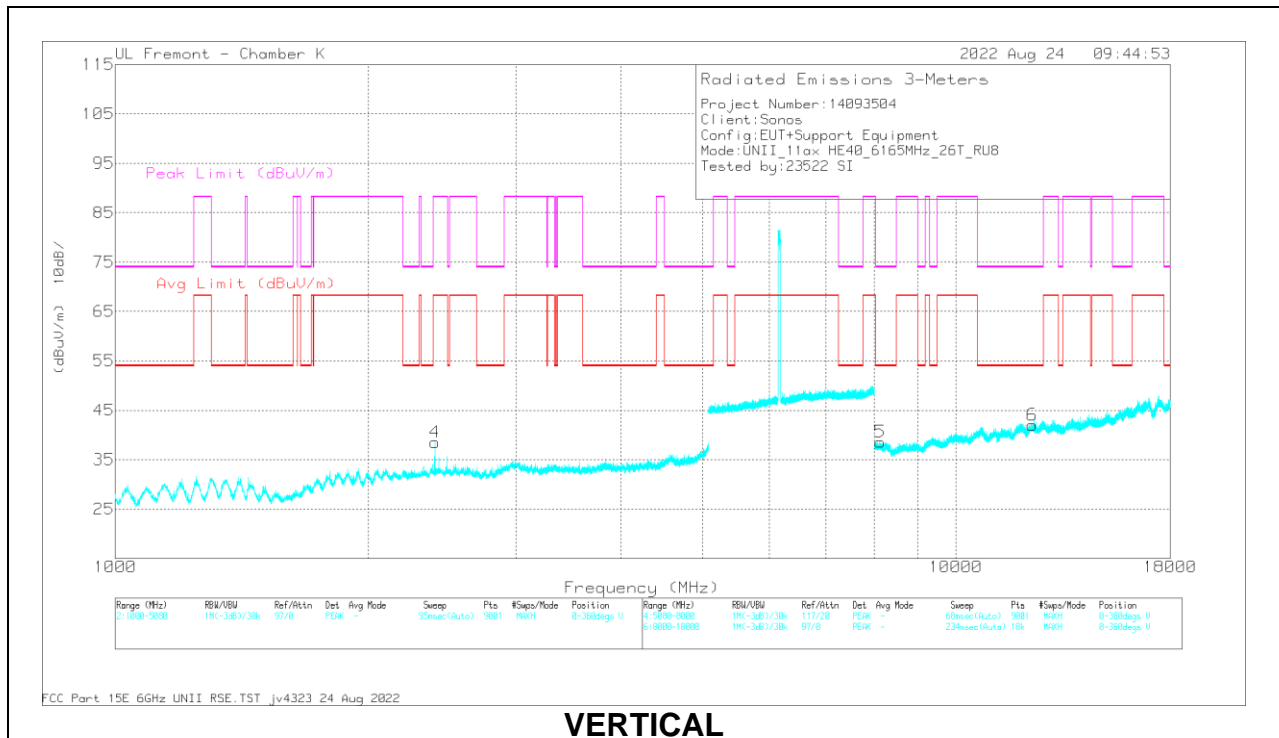

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.282	62.66	PK-U	32.5	-44.6	0	50.56	-	-	88.2	-37.64	285	139	H
	2400.012	53.8	ADR	32.5	-44.6	1.96	43.66	68.2	-24.54	-	-	285	139	H
2	* 8337.763	48.96	PK-U	35.7	-37.2	0	47.46	-	-	74	-26.54	77	364	H
	* 8340.269	37.37	ADR	35.7	-37.1	1.96	37.93	54	-16.07	-	-	77	364	H
3	* 12329.49	47.25	PK-U	39	-34.5	0	51.75	-	-	74	-22.25	68	338	H
	* 12331.181	35.42	ADR	39	-34.4	1.96	41.98	54	-12.02	-	-	68	338	H
4	2399.972	62.78	PK-U	32.5	-44.6	0	50.68	-	-	88.2	-37.52	5	265	V
	2400.077	53.43	ADR	32.5	-44.6	1.96	43.29	68.2	-24.91	-	-	5	265	V
5	* 8128.806	49.82	PK-U	35.8	-37.5	0	48.12	-	-	74	-25.88	310	378	V
	* 8132.271	37.97	ADR	35.8	-37.5	1.96	38.23	54	-15.77	-	-	310	378	V
6	* 12335.225	47.57	PK-U	39	-34.5	0	52.07	-	-	74	-21.93	237	355	V
	* 12335.133	35.61	ADR	39	-34.5	1.96	42.07	54	-11.93	-	-	237	355	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 17

HARMONICS AND SPURIOUS EMISSIONS

HIGH CHANNEL

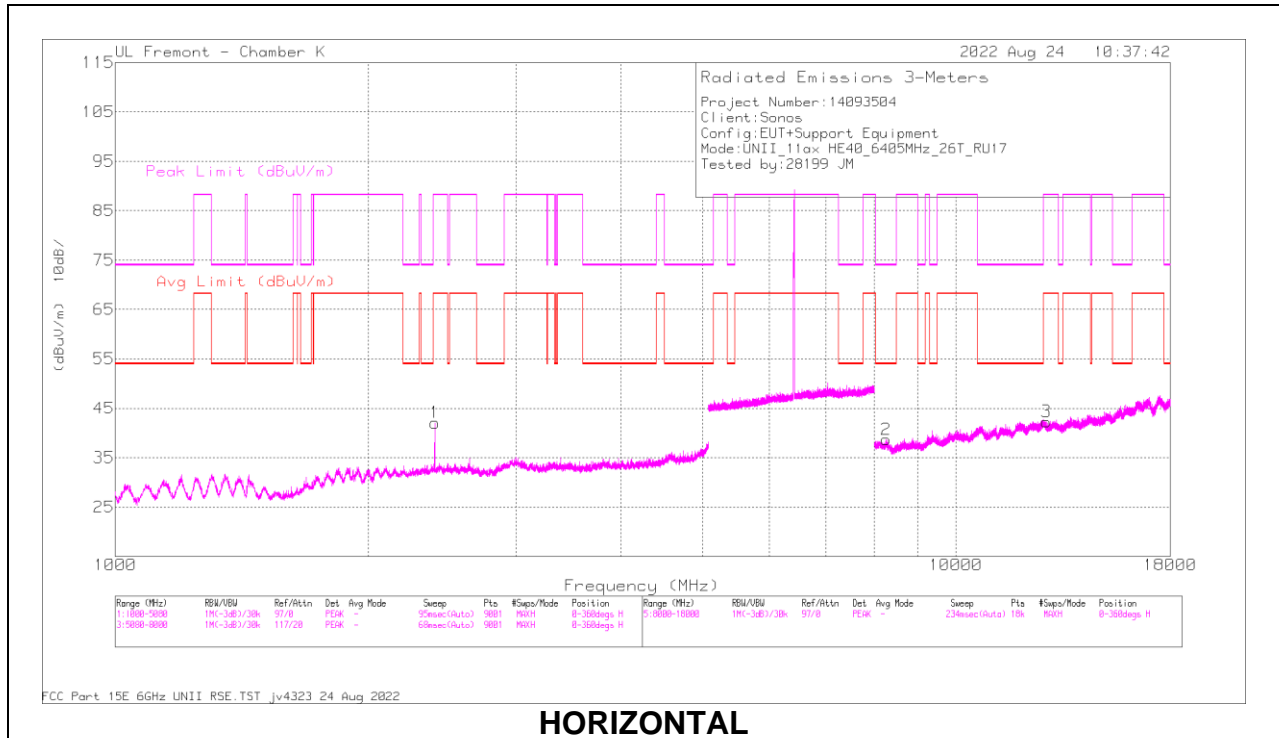

HORIZONTAL

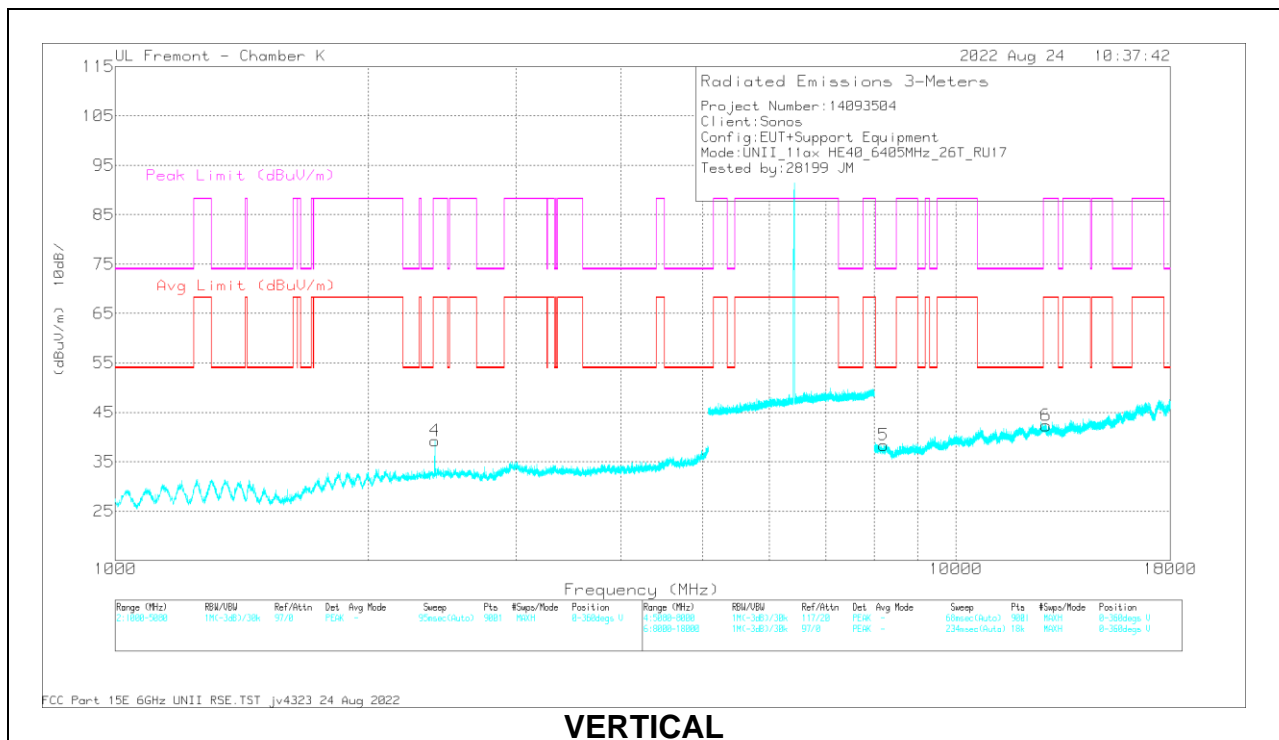

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Filtr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.207	62.72	PK-U	32.5	-44.6	0	50.62	-	-	88.2	-37.58	286	141	H
	2400.017	53.61	ADR	32.5	-44.6	1.96	43.47	68.2	-24.73	-	-	286	141	H
2	* 8264.058	49.11	PK-U	35.7	-36.9	0	47.91	-	-	74	-26.09	114	393	H
	* 8263.958	37.65	ADR	35.7	-36.9	1.96	38.41	54	-15.59	-	-	114	393	H
3	12822.668	46.86	PK-U	39.2	-34.4	0	51.66	-	-	88.2	-36.54	341	362	H
	12823.256	35.04	ADR	39.2	-34.4	1.96	41.8	68.2	-26.4	-	-	341	362	H
4	2400.137	62.94	PK-U	32.5	-44.6	0	50.84	-	-	88.2	-37.36	4	262	V
	2400.022	53.58	ADR	32.5	-44.6	1.96	43.44	68.2	-24.76	-	-	4	262	V
5	* 8204.277	49.34	PK-U	35.8	-37.1	0	48.04	-	-	74	-25.96	184	156	V
	* 8206.795	37.37	ADR	35.8	-37.1	1.96	38.03	54	-15.97	-	-	184	156	V
6	12809.427	46.9	PK-U	39.2	-34.4	0	51.7	-	-	88.2	-36.5	153	369	V
	12809.224	35.13	ADR	39.2	-34.4	1.96	41.89	68.2	-26.31	-	-	153	369	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 1 + Antenna 4 OFDMA MODE: 484-Tones, RU Index 65

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

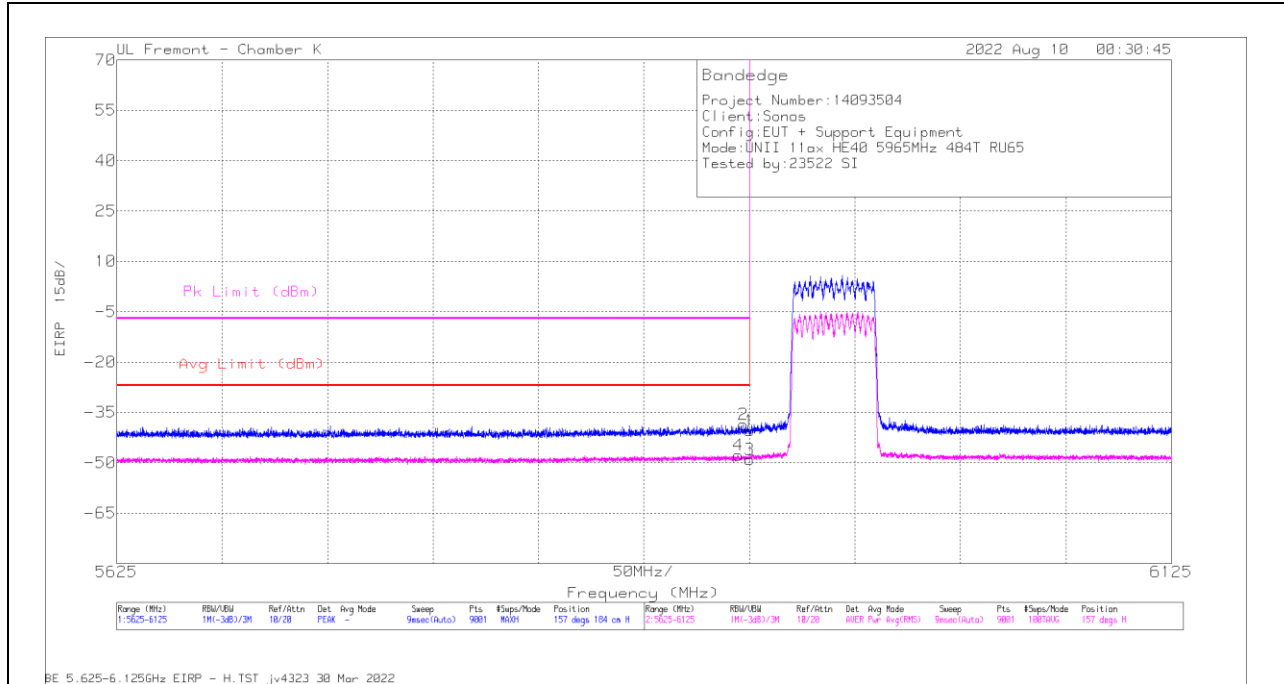


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Pk Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5925	-57.45	Pk	35.1	-29.9	11.8	0	-40.45	-	-	-7	-33.45	157	184	H
2	5922.113	-55.63	Pk	35.1	-29.8	11.8	0	-38.53	-	-	-7	-31.53	157	184	H
3	5925	-69.01	RMS	35.1	-29.9	11.8	2.96	-49.05	-27	-22.05	-	-	157	184	H
4	5919.78	-67.59	RMS	35.1	-29.9	11.8	2.96	-47.63	-27	-20.63	-	-	157	184	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

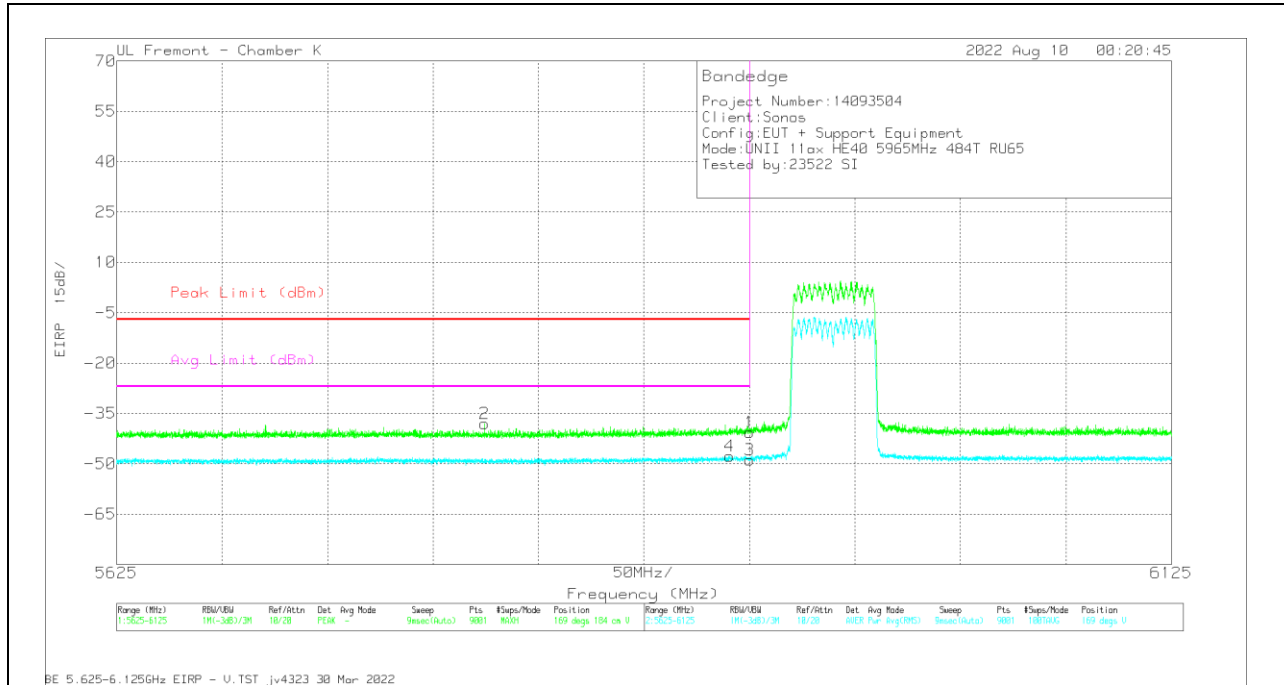


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5925	-57.7	Pk	35.1	-29.9	11.8	0	-40.7	-7	-33.7	-	-	169	184	V
2	5799.39	-54.75	Pk	34.8	-29.9	11.8	0	-38.05	-7	-31.05	-	-	169	184	V
3	5925	-68.85	RMS	35.1	-29.9	11.8	2.96	-48.89	-	-	-27	-21.89	169	184	V
4	5915.447	-67.72	RMS	35.1	-29.8	11.8	2.96	-47.66	-	-	-27	-20.66	169	184	V


Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

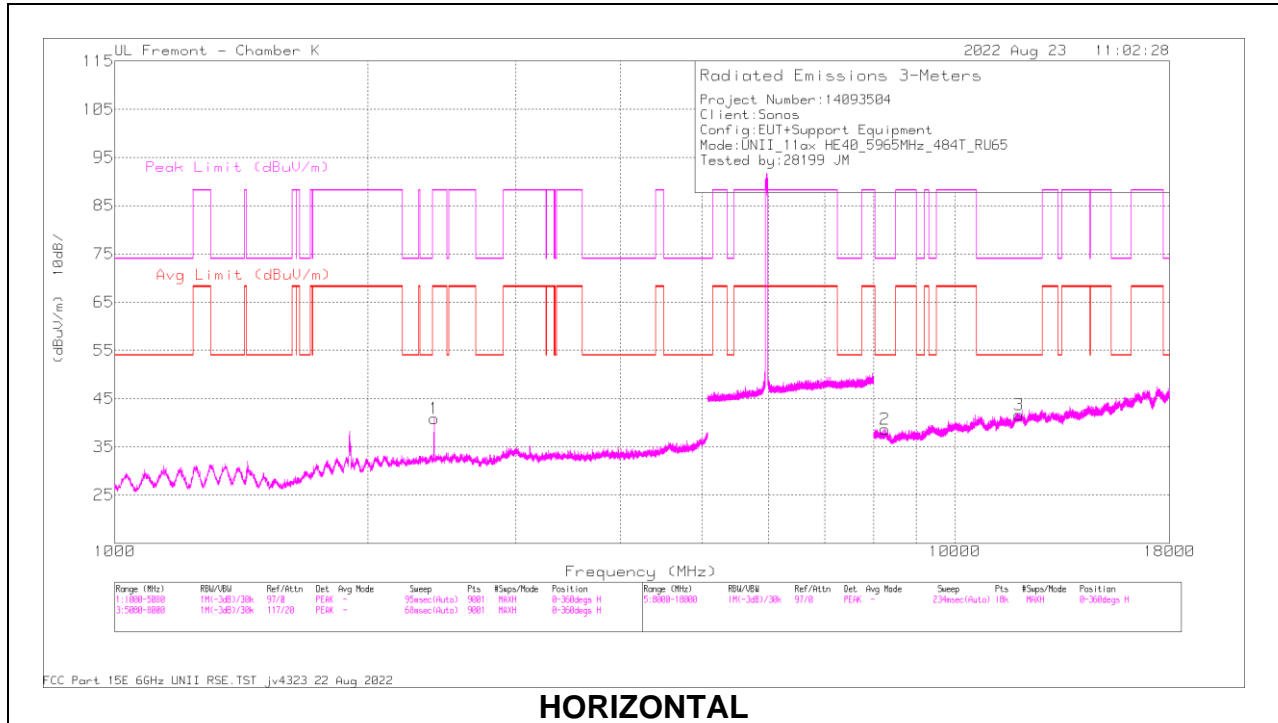

HORIZONTAL

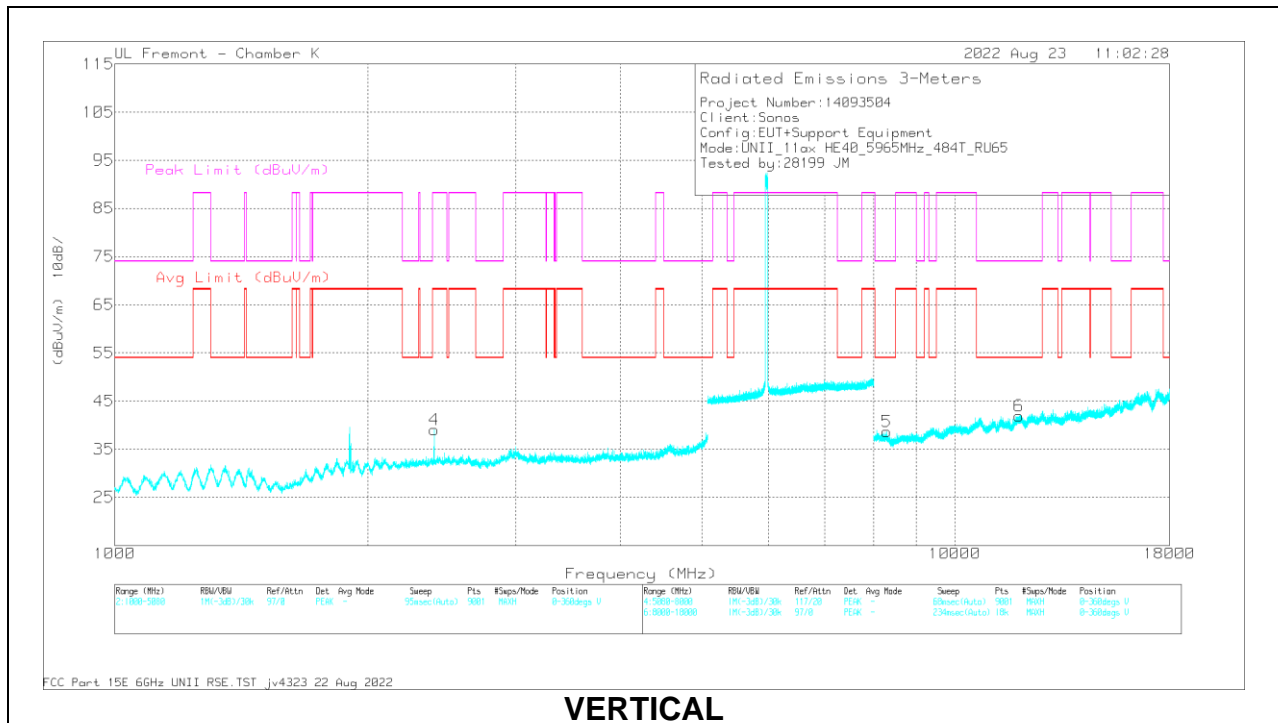

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.092	62.92	PK-U	32.5	-44.6	0	50.82	-	-	88.2	-37.38	188	197	H
	2400.062	53.49	ADR	32.5	-44.6	2.96	44.35	68.2	-23.85	-	-	188	197	H
2	* 8253.112	49.41	PK-U	35.7	-37	0	48.11	-	-	74	-25.89	318	311	H
	* 8254.694	37.42	ADR	35.7	-36.9	2.96	39.18	54	-14.82	-	-	318	311	H
3	* 11918.122	47.69	PK-U	38.6	-34.7	0	51.59	-	-	74	-22.41	63	309	H
	* 11919.145	35.63	ADR	38.6	-34.8	2.96	42.39	54	-11.61	-	-	63	309	H
4	2399.833	60.38	PK-U	32.5	-44.6	0	48.28	-	-	88.2	-39.92	181	106	V
	2399.977	51.42	ADR	32.5	-44.6	2.96	42.28	68.2	-25.92	-	-	181	106	V
5	* 8297.545	49.38	PK-U	35.7	-37.2	0	47.88	-	-	74	-26.12	272	250	V
	* 8297.693	37.41	ADR	35.7	-37.2	2.96	38.87	54	-15.13	-	-	272	250	V
6	* 11924.341	47.54	PK-U	38.6	-34.7	0	51.44	-	-	74	-22.56	19	313	V
	* 11923.517	35.57	ADR	38.6	-34.8	2.96	42.33	54	-11.67	-	-	19	313	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL

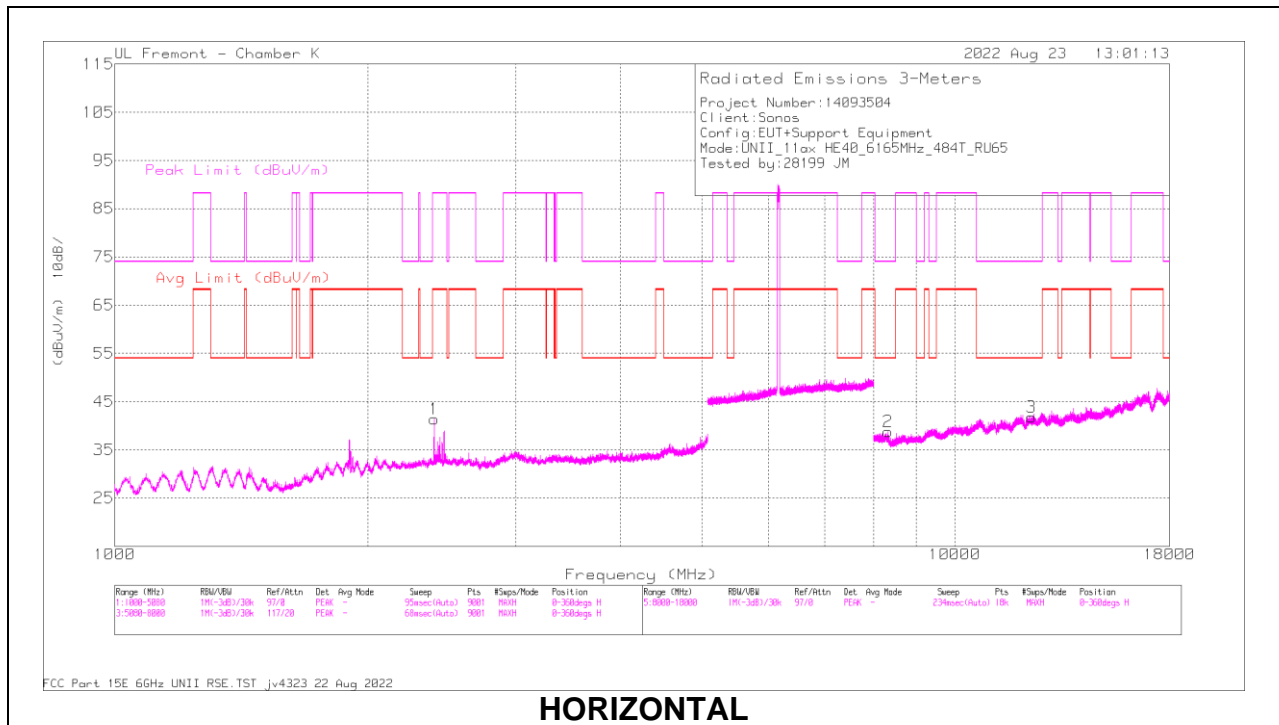

HORIZONTAL

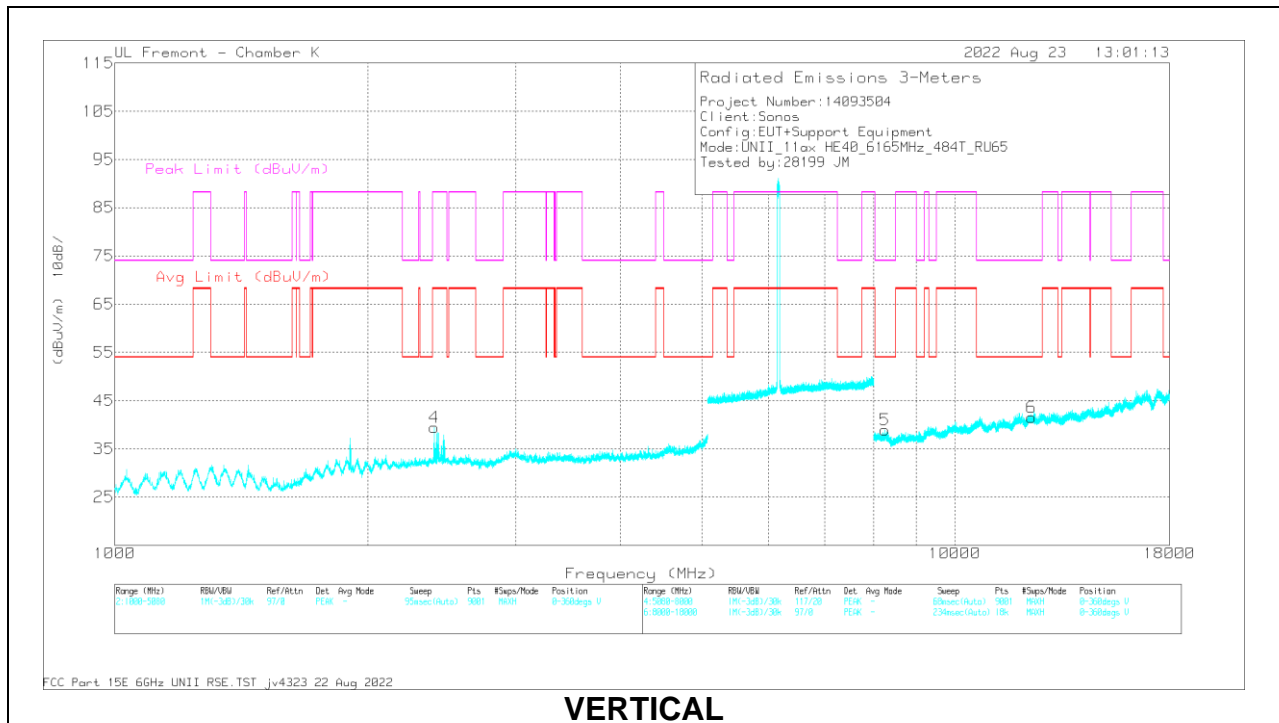

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.097	62.32	PK-U	32.5	-44.6	0	50.22	-	-	88.2	-37.98	187	196	H
	2400.102	53.63	ADR	32.5	-44.6	2.96	44.49	68.2	-23.71	-	-	187	196	H
2	* 8323.276	49.07	PK-U	35.7	-37.2	0	47.57	-	-	74	-26.43	343	173	H
	* 8324.454	37.03	ADR	35.7	-37.2	2.96	38.49	54	-15.51	-	-	343	173	H
3	* 12334.566	46.69	PK-U	39	-34.5	0	51.19	-	-	74	-22.81	80	328	H
	* 12335.269	35.24	ADR	39	-34.5	2.96	42.7	54	-11.3	-	-	80	328	H
4	2399.578	60.84	PK-U	32.5	-44.6	0	48.74	-	-	88.2	-39.46	179	106	V
	2399.972	51.29	ADR	32.5	-44.6	2.96	42.15	68.2	-26.05	-	-	179	106	V
5	* 8258.351	49.94	PK-U	35.7	-36.9	0	48.74	-	-	74	-25.26	118	261	V
	* 8259.918	37.34	ADR	35.7	-36.9	2.96	39.1	54	-14.9	-	-	118	261	V
6	* 12327.156	46.73	PK-U	39	-34.5	0	51.23	-	-	74	-22.77	349	326	V
	* 12328.155	35.03	ADR	39	-34.4	2.96	42.59	54	-11.41	-	-	349	326	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL

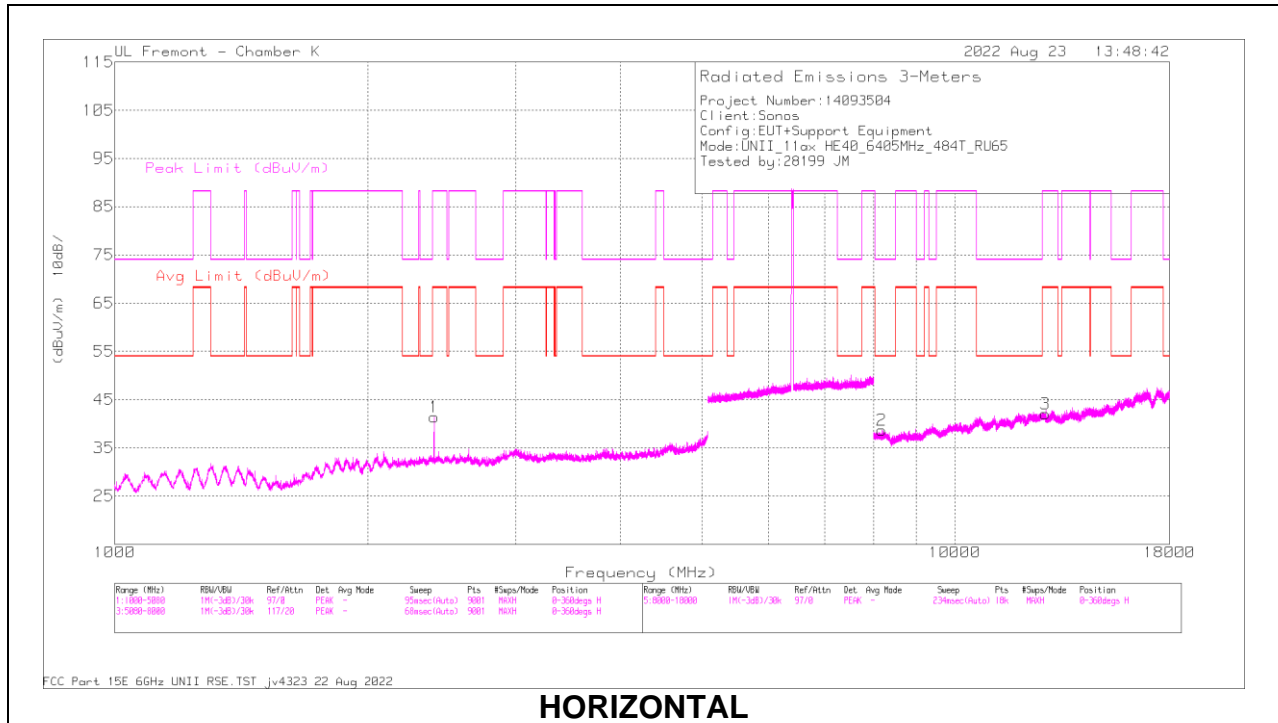

HORIZONTAL

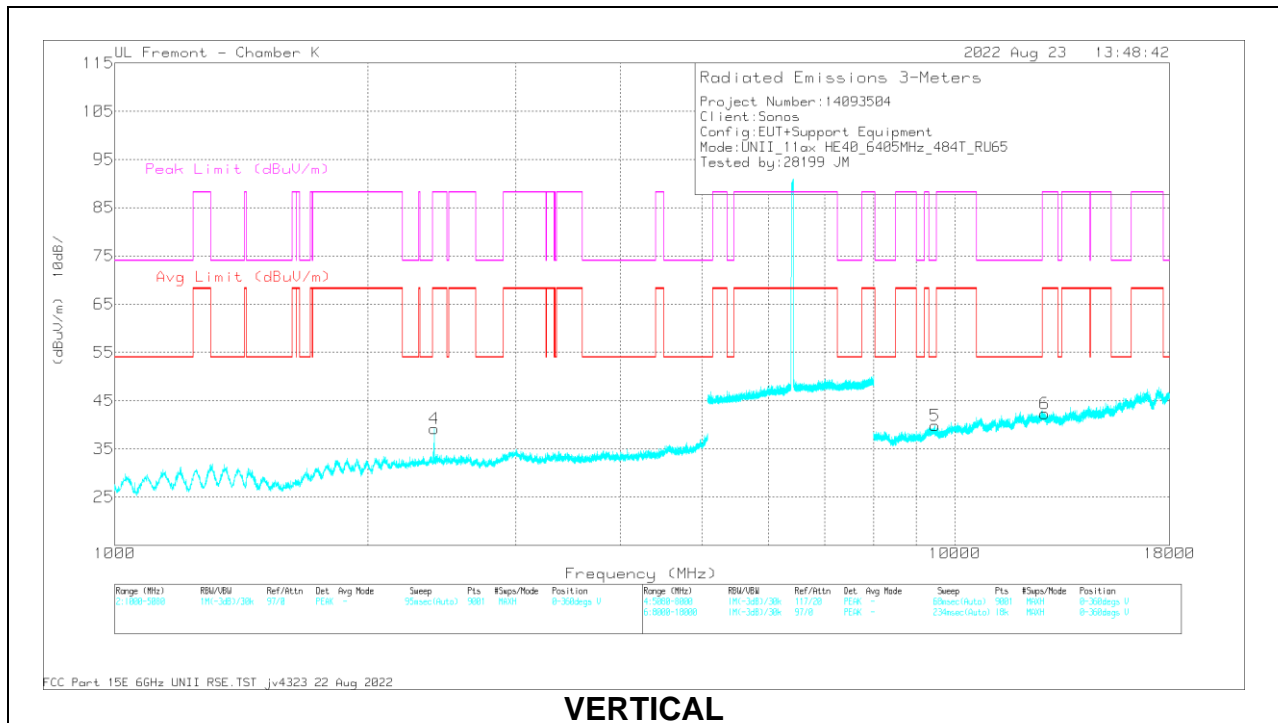

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2399.967	62.92	PK-U	32.5	-44.6	0	50.82	-	-	88.2	-37.38	189	194	H
	2400.057	53.97	ADR	32.5	-44.6	2.96	44.83	68.2	-23.37	-	-	189	194	H
2	* 8188.055	50.6	PK-U	35.8	-37.3	0	49.1	-	-	74	-24.9	40	301	H
	* 8189.626	37.56	ADR	35.8	-37.3	2.96	39.02	54	-14.98	-	-	40	301	H
3	12813.604	46.21	PK-U	39.2	-34.4	0	51.01	-	-	88.2	-37.19	146	367	H
	12813.32	34.6	ADR	39.2	-34.4	2.96	42.36	68.2	-25.84	-	-	146	367	H
4	2400.069	60.35	PK-U	32.5	-44.6	0	48.25	-	-	88.2	-39.95	177	106	V
	2399.994	50.93	ADR	32.5	-44.6	2.96	41.79	68.2	-26.41	-	-	177	106	V
5	* 9465.319	48.37	PK-U	36.6	-36.6	0	48.37	-	-	74	-25.63	77	320	V
	* 9467.537	36.83	ADR	36.6	-36.5	2.96	39.89	54	-14.11	-	-	77	320	V
6	12795.564	46.24	PK-U	39.2	-34.4	0	51.04	-	-	88.2	-37.16	25	193	V
	12798.125	34.5	ADR	39.2	-34.4	2.96	42.26	68.2	-25.94	-	-	25	193	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.3. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE UNII-5 BAND

2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 0

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

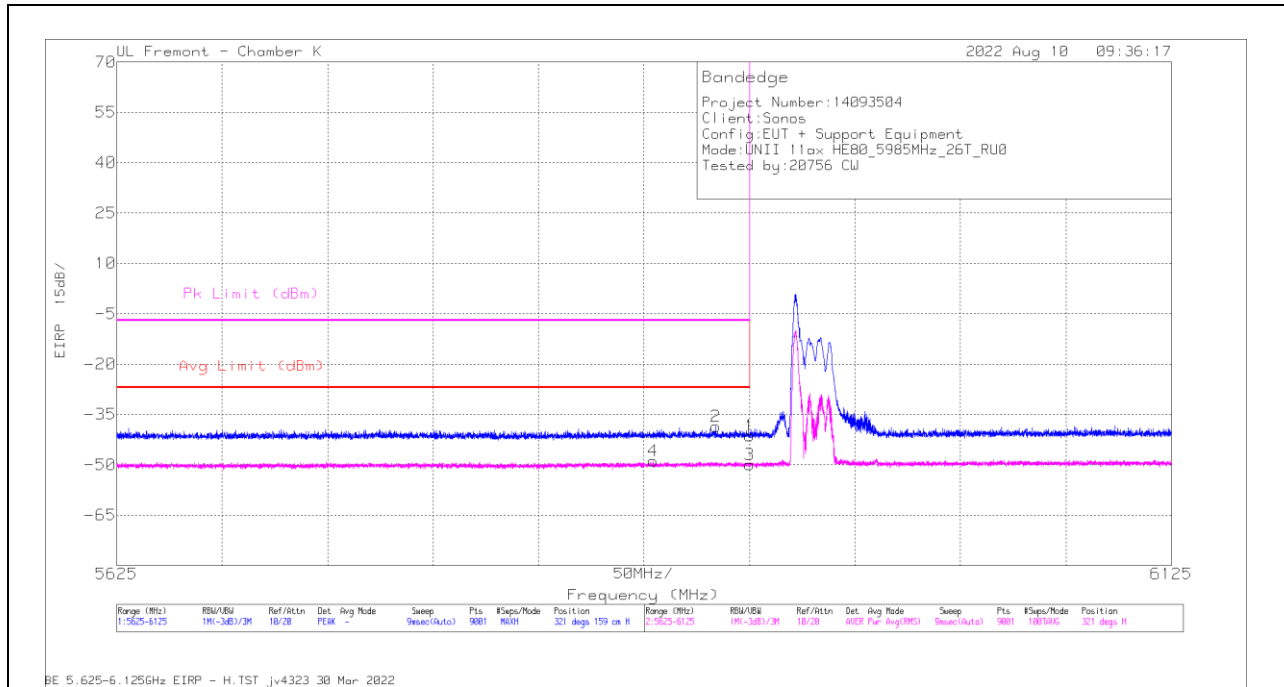


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Pk Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5925	-58.37	Pk	35.1	-29.9	11.8	0	-41.37	-	-	-7	-34.37	321	159	H
2	5909.002	-55.64	Pk	35.1	-29.8	11.8	0	-38.54	-	-	-7	-31.54	321	159	H
3	5925	-68.86	RMS	35.1	-29.9	11.8	1.96	-49.9	-27	-22.9	-	-	321	159	H
4	5879.335	-67.75	RMS	35	-29.9	11.8	1.96	-48.89	-27	-21.89	-	-	321	159	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

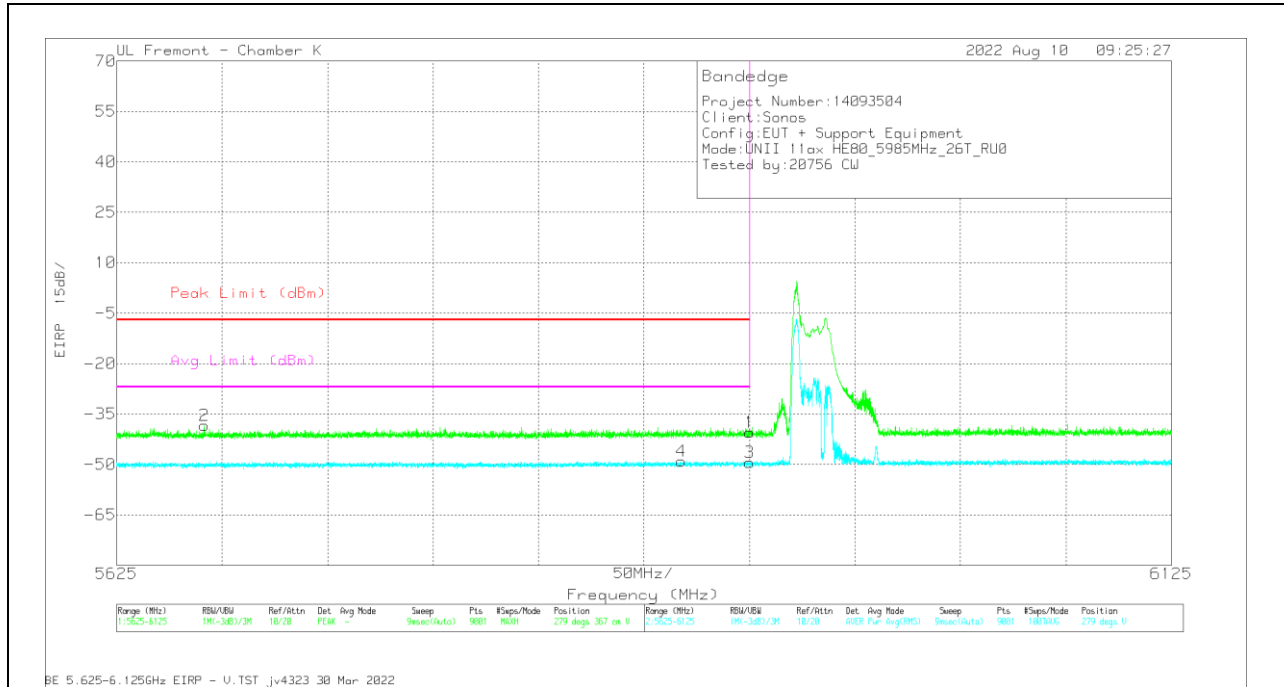



Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5925	-57.35	Pk	35.1	-29.9	11.8	0	-40.35	-7	-33.35	-	-	279	367	V
2	5666.5	-54.87	Pk	34.8	-30.1	11.8	0	-38.37	-7	-31.37	-	-	279	367	V
3	5925	-68.4	RMS	35.1	-29.9	11.8	1.96	-49.44	-	-	-27	-22.44	279	367	V
4	5892.613	-67.89	RMS	35.1	-29.9	11.8	1.96	-48.93	-	-	-27	-21.93	279	367	V

Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

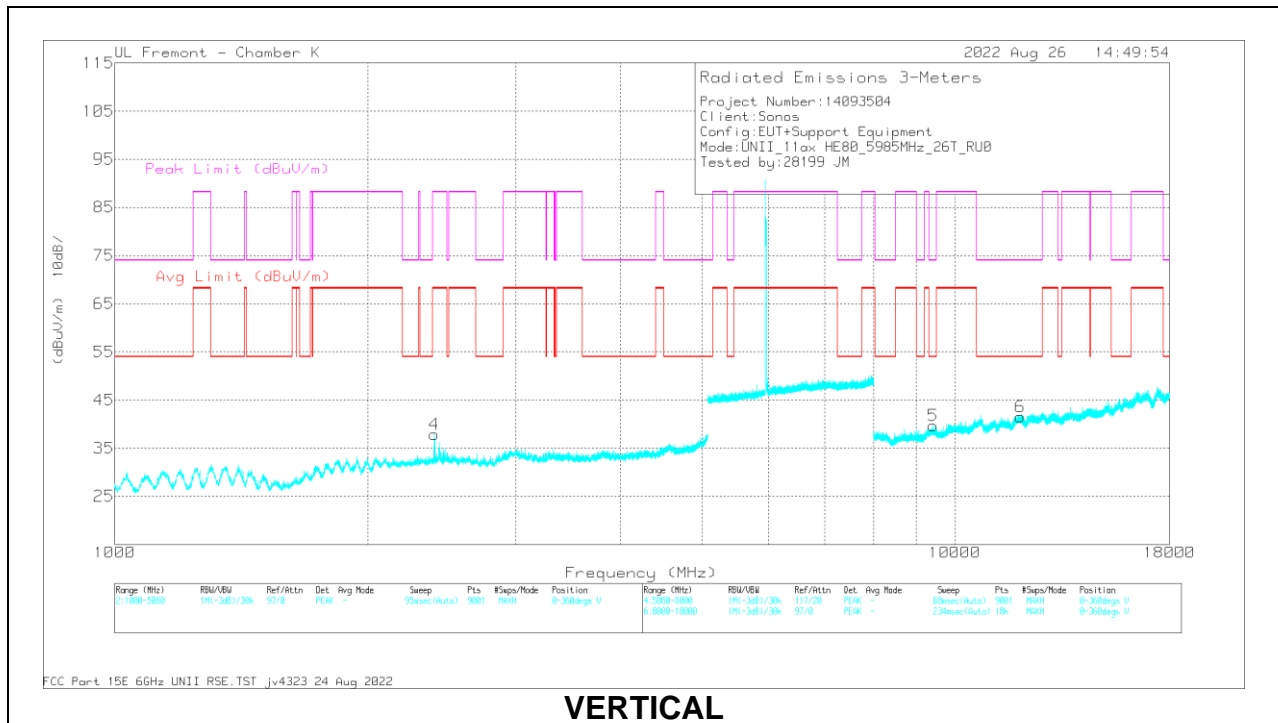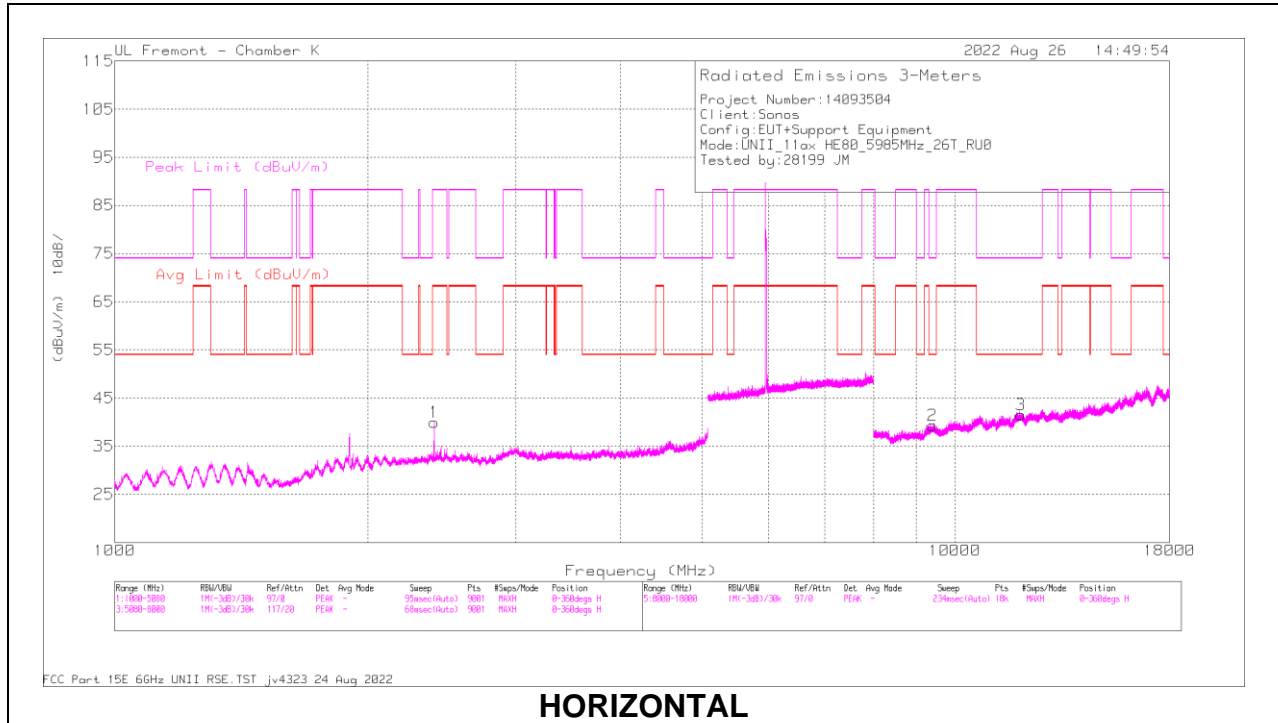

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2399.967	60.95	PK-U	32.5	-44.6	0	48.85	-	-	88.2	-39.35	273	123	H
	2400.062	51.67	ADR	32.5	-44.6	1.96	41.53	68.2	-26.67	-	-	273	123	H
2	* 9404.735	49.93	PK-U	36.6	-36.7	0	49.83	-	-	74	-24.17	253	309	H
	* 9408.008	37.32	ADR	36.6	-36.7	1.96	39.18	54	-14.82	-	-	253	309	H
3	* 11985.105	46.67	PK-U	38.7	-34.3	0	51.07	-	-	74	-22.93	56	244	H
	* 11984.597	34.89	ADR	38.7	-34.3	1.96	41.25	54	-12.75	-	-	56	244	H
4	2399.957	58.24	PK-U	32.5	-44.6	0	46.14	-	-	88.2	-42.06	74	100	V
	2399.977	49.23	ADR	32.5	-44.6	1.96	39.09	68.2	-29.11	-	-	74	100	V
5	* 9414.462	49.75	PK-U	36.6	-36.6	0	49.75	-	-	74	-24.25	184	331	V
	* 9415.358	37.2	ADR	36.6	-36.6	1.96	39.16	54	-14.84	-	-	184	331	V
6	* 11962.192	46.71	PK-U	38.7	-34.4	0	51.01	-	-	74	-22.99	312	172	V
	* 11963.627	34.91	ADR	38.7	-34.5	1.96	41.07	54	-12.93	-	-	312	172	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 18

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL

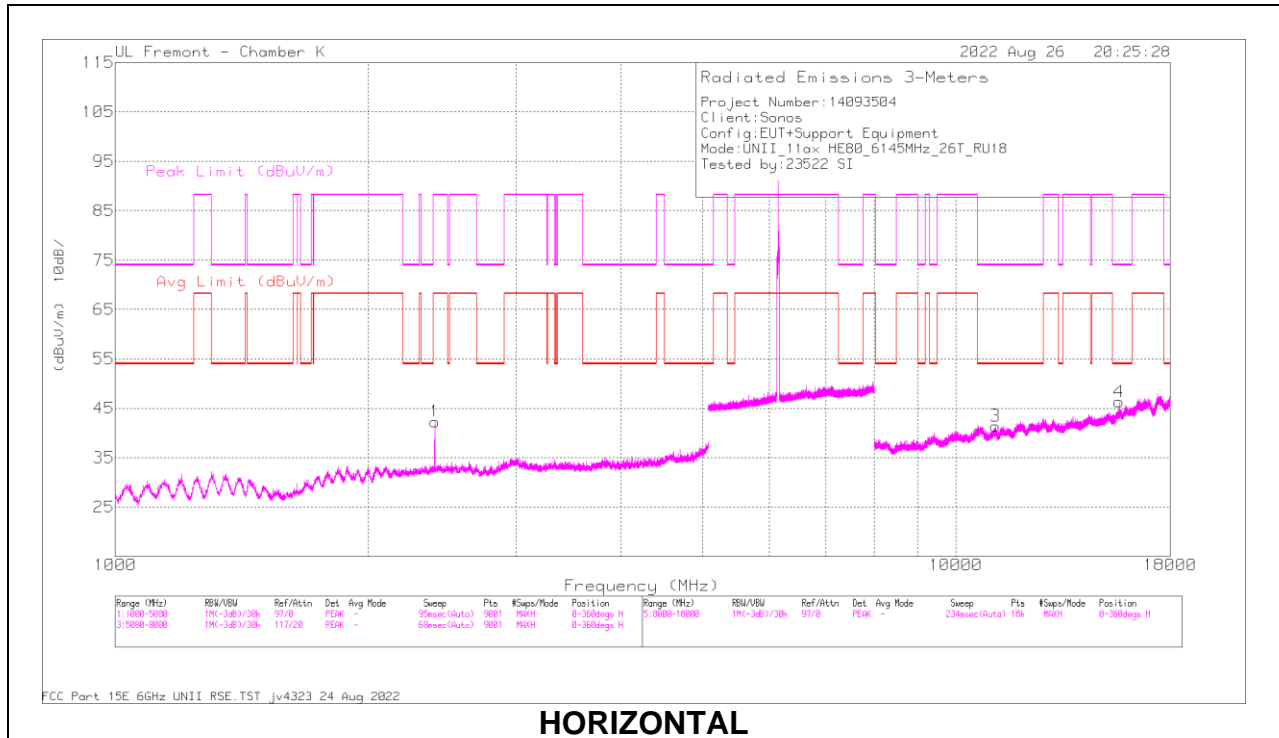

HORIZONTAL

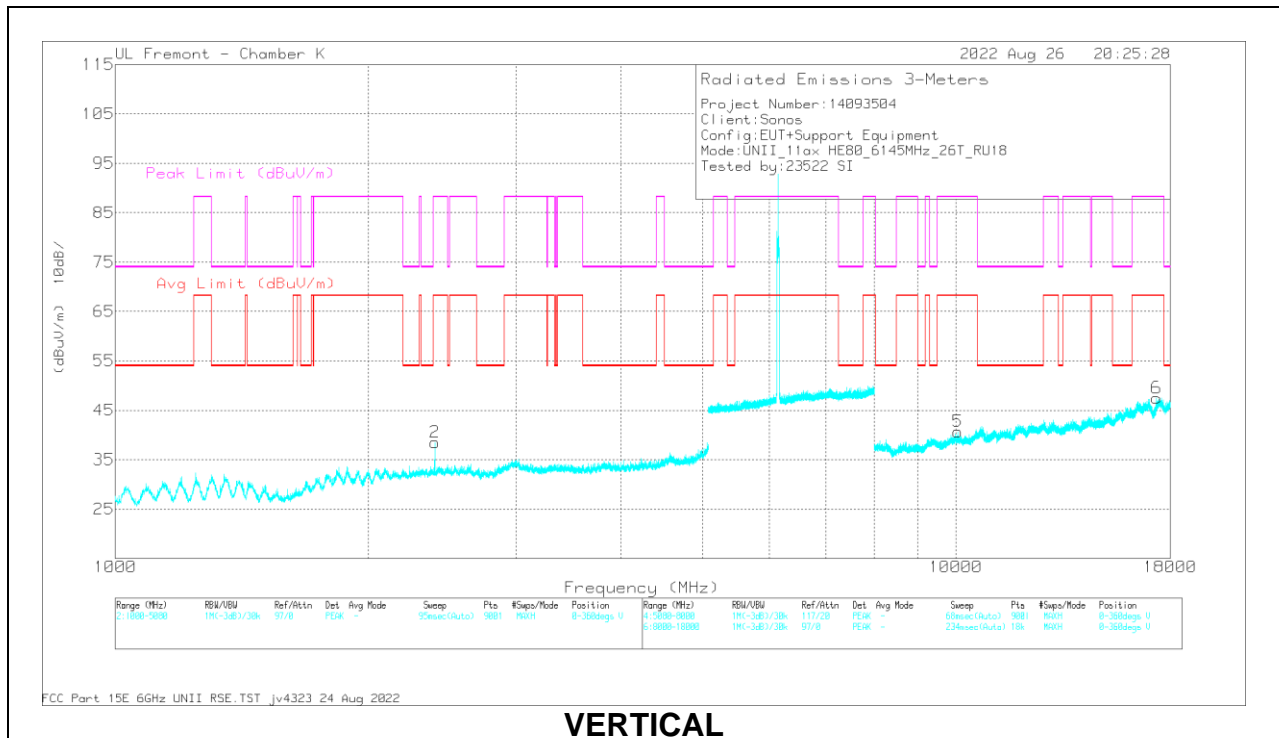

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/CbI/Filtr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.24	61.03	PK-U	32.5	-44.6	0	48.93	-	-	88.2	-39.27	289	281	H
	2399.964	51.89	ADR	32.5	-44.6	1.96	41.75	68.2	-26.45	-	-	289	281	H
2	2399.541	65.48	PK-U	32.5	-44.6	0	53.38	-	-	88.2	-34.82	30	292	V
	2400.128	50.84	ADR	32.5	-44.6	1.96	40.7	68.2	-27.5	-	-	30	292	V
3	* 11154.543	48.71	PK-U	38	-35.4	0	51.31	-	-	74	-22.69	247	244	H
	* 11155.302	36.69	ADR	38	-35.4	1.96	41.25	54	-12.75	-	-	247	244	H
4	* 15642.118	47.56	PK-U	40.5	-33.5	0	54.56	-	-	74	-19.44	26	246	H
	* 15644.256	35.31	ADR	40.5	-33.5	1.96	44.27	54	-9.73	-	-	26	246	H
5	10059.639	47.8	PK-U	37.5	-36.4	0	48.9	-	-	88.2	-39.3	67	284	V
	10060.754	36.53	ADR	37.5	-36.3	1.96	39.69	68.2	-28.51	-	-	67	284	V
6	17338.188	44.75	PK-U	41.4	-30.9	0	55.25	-	-	88.2	-32.95	272	266	V
	17339.838	33.28	ADR	41.4	-30.9	1.96	45.74	68.2	-22.46	-	-	272	266	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 36

HARMONICS AND SPURIOUS EMISSIONS

HIGH CHANNEL

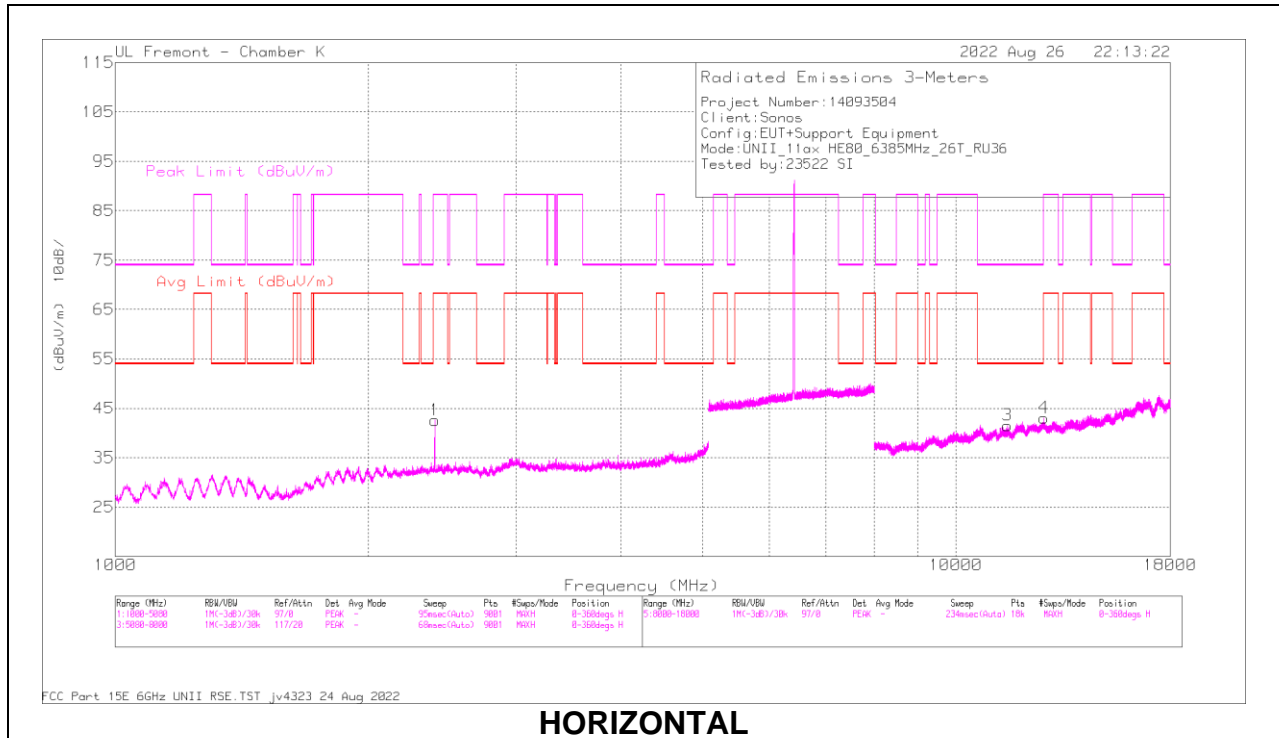

HORIZONTAL

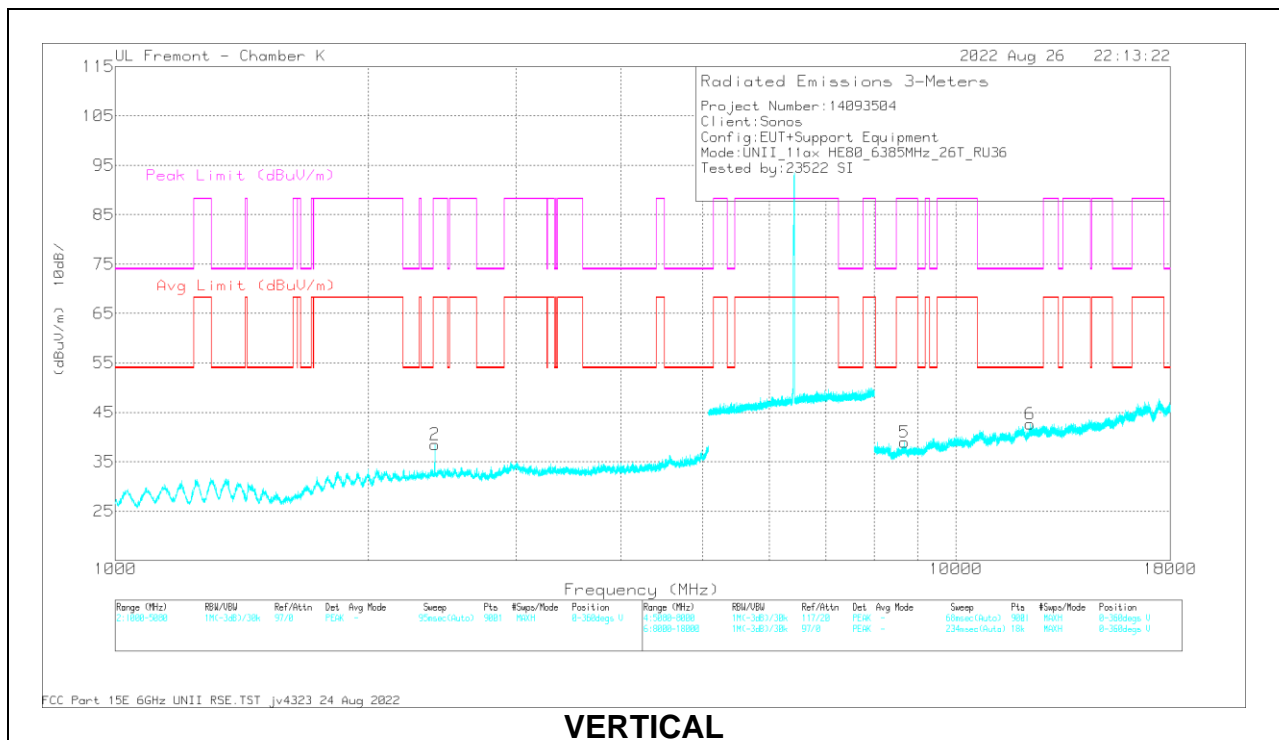

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.144	59.95	PK-U	32.5	-44.6	0	47.85	-	-	88.2	-40.35	291	382	H
	2400.096	50.73	ADR	32.5	-44.6	1.96	40.59	68.2	-27.61	-	-	291	382	H
2	2400.248	58.86	PK-U	32.5	-44.6	0	46.76	-	-	88.2	-41.44	16	139	V
	2400.044	49.98	ADR	32.5	-44.6	1.96	39.84	68.2	-28.36	-	-	16	139	V
3	* 11529.75	47.24	PK-U	38.3	-35.6	0	49.94	-	-	74	-24.06	85	137	H
	* 11531.029	35.38	ADR	38.3	-35.6	1.96	40.04	54	-13.96	-	-	85	137	H
4	12735.235	47.33	PK-U	39.2	-34.4	0	52.13	-	-	88.2	-36.07	305	242	H
	12734.612	34.5	ADR	39.2	-34.4	1.96	41.26	68.2	-26.94	-	-	305	242	H
5	8688.459	49.23	PK-U	35.9	-37.1	0	48.03	-	-	88.2	-40.17	35	284	V
	8689.287	37.03	ADR	35.9	-37.1	1.96	37.79	68.2	-30.41	-	-	35	284	V
6	* 12256.717	46.16	PK-U	39	-34.5	0	50.66	-	-	74	-23.34	84	215	V
	* 12256.225	34.49	ADR	39	-34.5	1.96	40.95	54	-13.05	-	-	84	215	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 1 + Antenna 4 OFDMA MODE: 996-Tones, RU Index 67

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

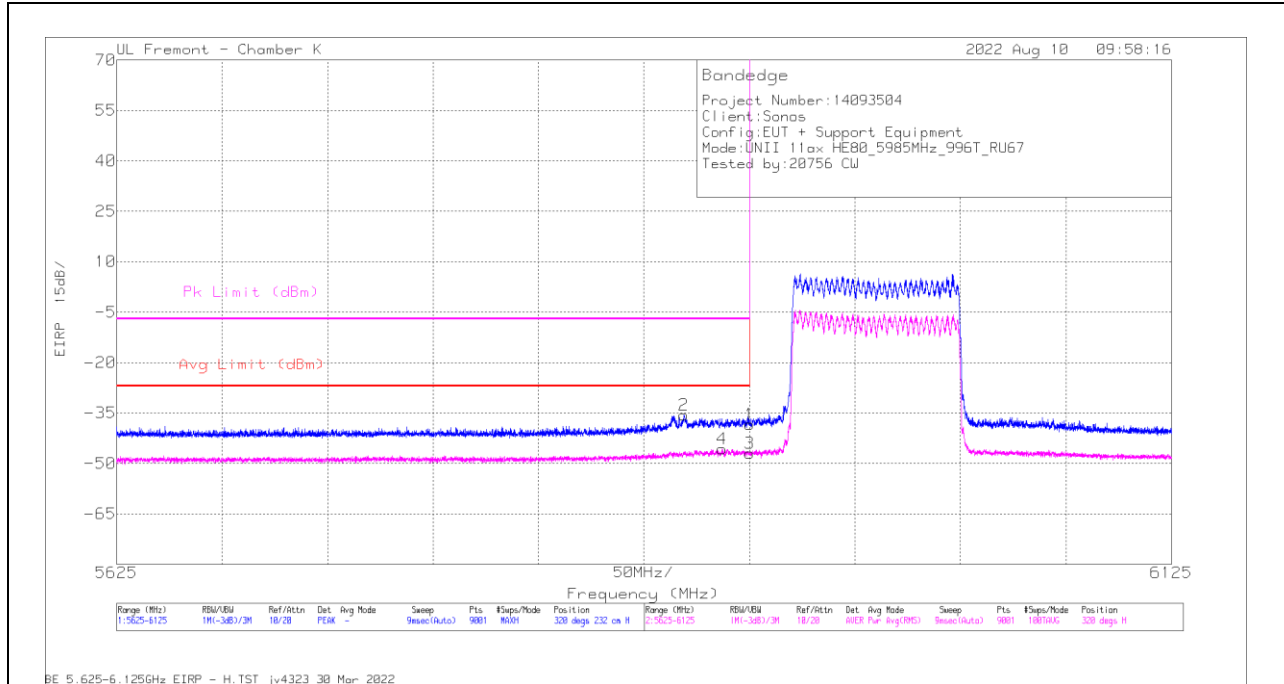


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Pk Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5925	-55.35	Pk	35.1	-29.9	11.8	0	-38.35	-	-	-7	-31.35	320	232	H
2	5893.891	-52.62	Pk	35.1	-29.8	11.8	0	-35.52	-	-	-7	-28.52	320	232	H
3	5925	-67.27	RMS	35.1	-29.9	11.8	3.25	-47.02	-27	-20.02	-	-	320	232	H
4	5911.947	-66.1	RMS	35.1	-29.8	11.8	3.25	-45.75	-27	-18.75	-	-	320	232	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

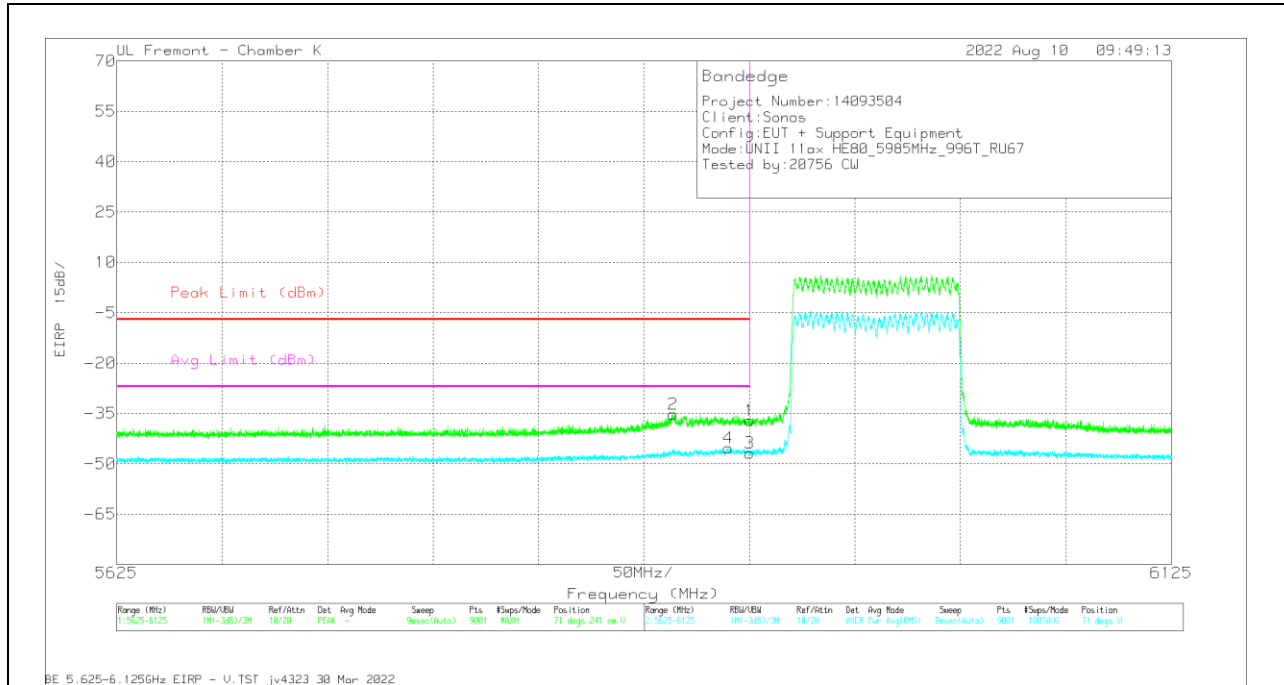



Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	80402 ACF(dB) ~ 3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5925	-54.12	Pk	35.1	-29.9	11.8	0	-37.12	-7	-30.12	-	-	71	241	V
2	5888.835	-52.27	Pk	35.1	-29.9	11.8	0	-35.27	-7	-28.27	-	-	71	241	V
3	5925	-66.95	RMS	35.1	-29.9	11.8	3.25	-46.7	-	-	-27	-19.7	71	241	V
4	5914.947	-65.57	RMS	35.1	-29.8	11.8	3.25	-45.22	-	-	-27	-18.22	71	241	V

Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

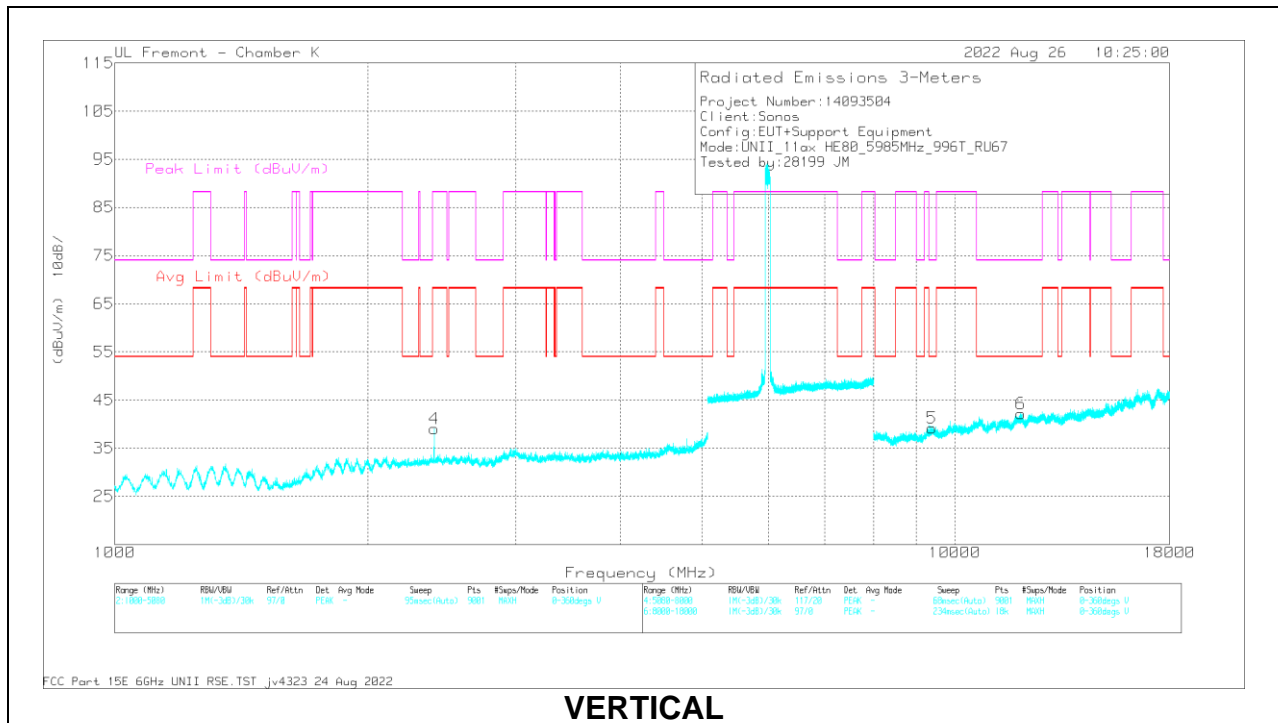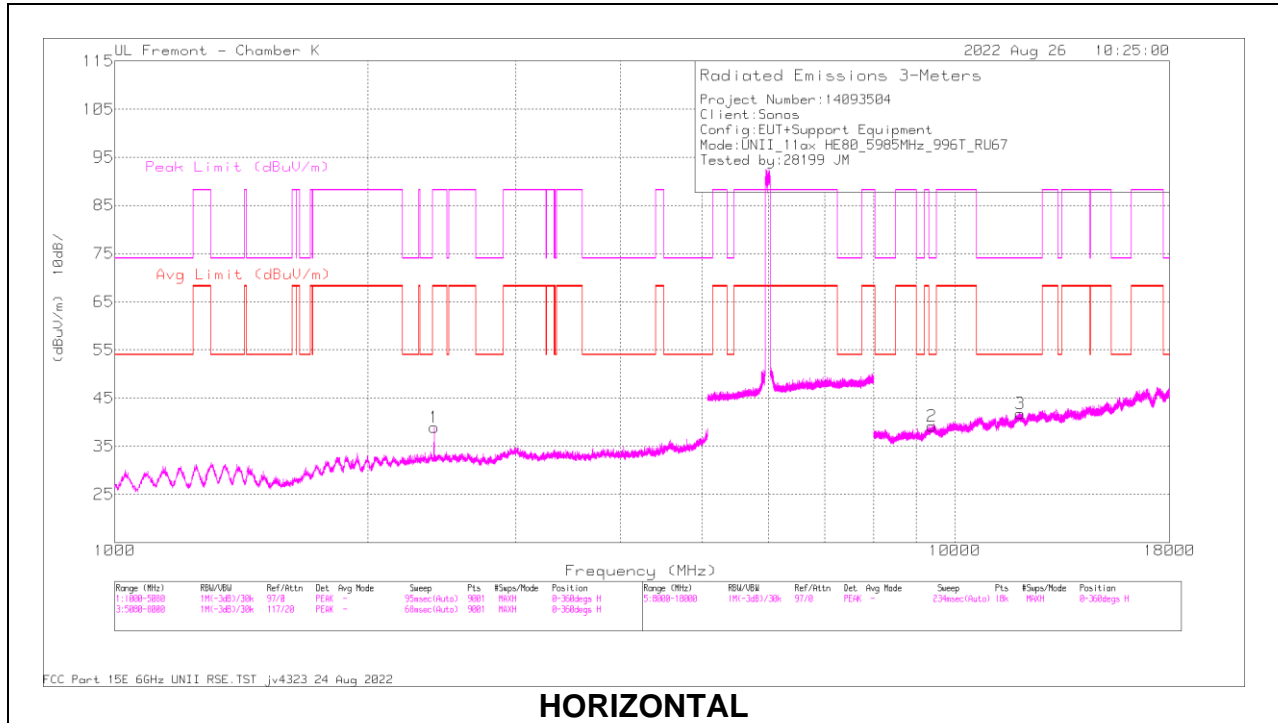

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.097	62.9	PK-U	32.5	-44.6	0	50.8	-	-	88.2	-37.4	259	306	H
	2400.042	52.94	ADR	32.5	-44.6	3.25	44.09	68.2	-24.11	-	-	259	306	H
2	2399.937	60.94	PK-U	32.5	-44.6	0	48.84	-	-	88.2	-39.36	217	224	V
	2399.962	51.24	ADR	32.5	-44.6	3.25	42.39	68.2	-25.81	-	-	217	224	V
3	* 9379.376	49.4	PK-U	36.6	-36.6	0	49.4	-	-	74	-24.6	100	225	H
	* 9381.121	37.32	ADR	36.6	-36.6	3.25	40.57	54	-13.43	-	-	100	225	H
4	* 11967.879	46.62	PK-U	38.7	-34.4	0	50.92	-	-	74	-23.08	353	351	H
	* 11970.009	35.04	ADR	38.7	-34.5	3.25	42.49	54	-11.51	-	-	353	351	H
5	* 9391.87	49.08	PK-U	36.6	-36.7	0	48.98	-	-	74	-25.02	95	143	V
	* 9391.478	37.06	ADR	36.6	-36.7	3.25	40.21	54	-13.79	-	-	95	143	V
6	* 11977.183	46.69	PK-U	38.7	-34.4	0	50.99	-	-	74	-23.01	83	380	V
	* 11976.188	35.03	ADR	38.7	-34.4	3.25	42.58	54	-11.42	-	-	83	380	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL

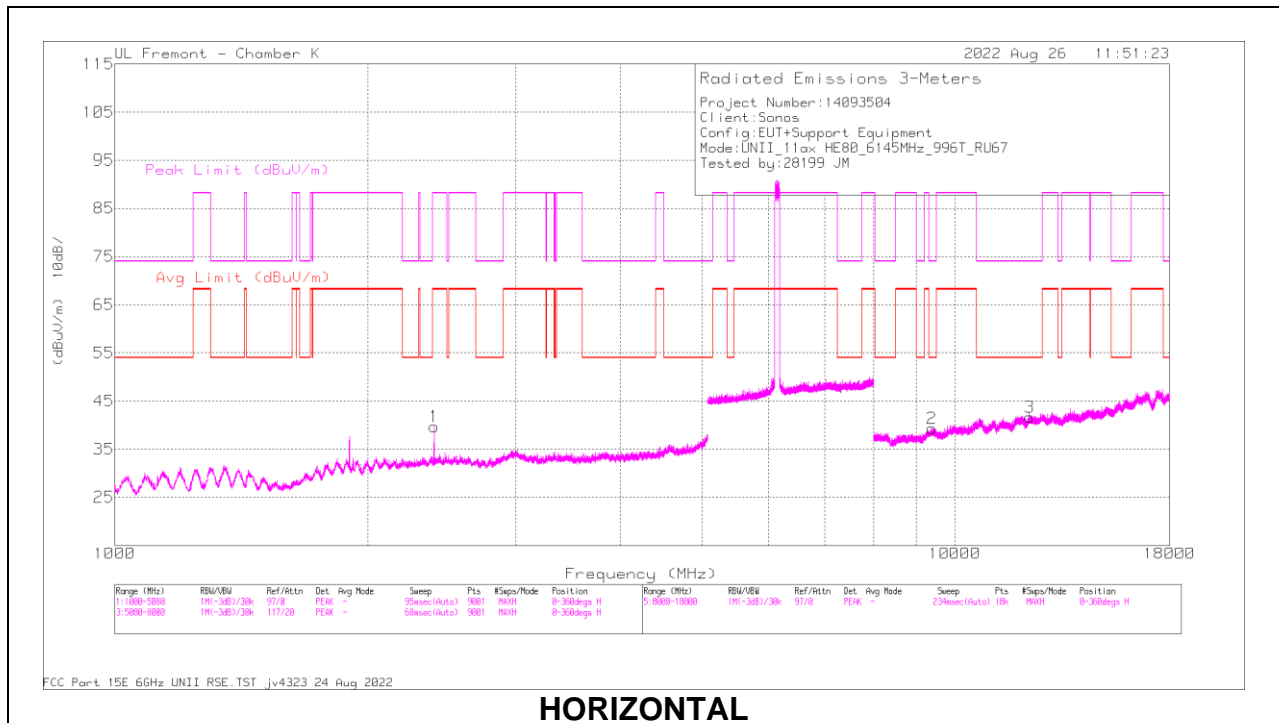

HORIZONTAL

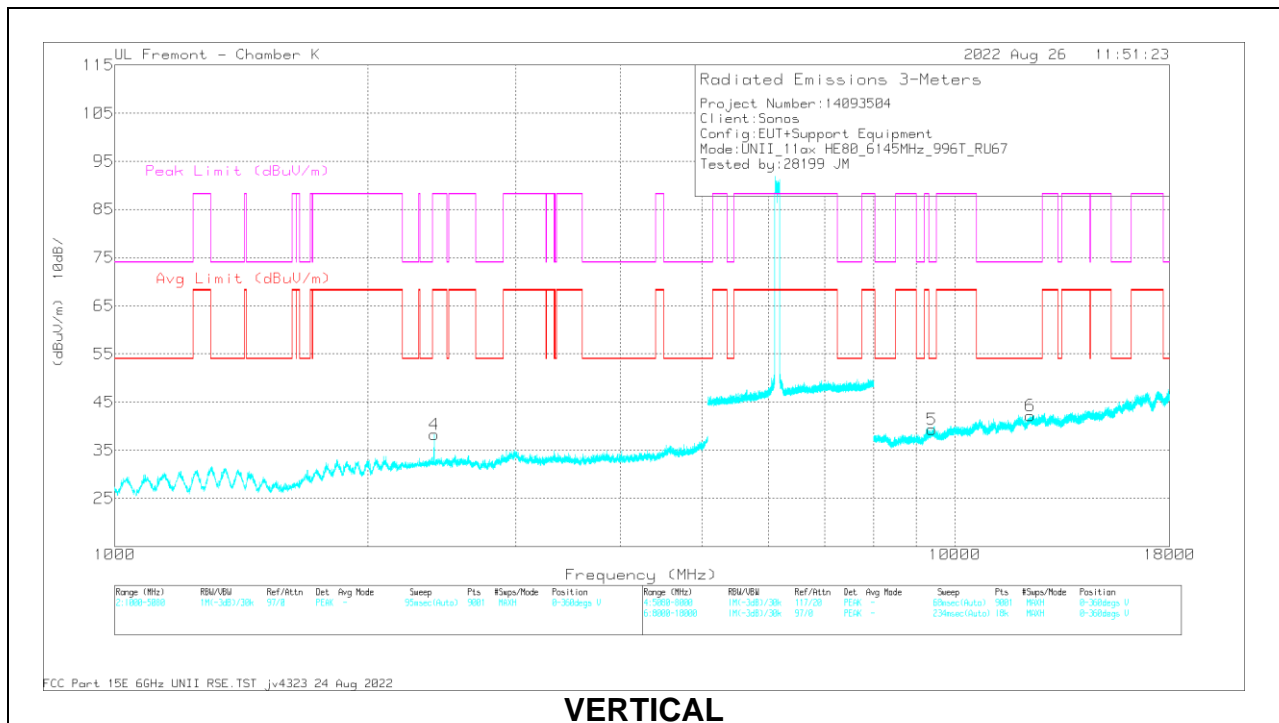

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.116	60.81	PK-U	32.5	-44.6	0	48.71	-	-	88.2	-39.49	21	114	H
	2399.991	51.96	ADR	32.5	-44.6	3.25	43.11	68.2	-25.09	-	-	21	114	H
2	* 9395.702	49.48	PK-U	36.6	-36.6	0	49.48	-	-	74	-24.52	343	217	H
	* 9395.838	37.18	ADR	36.6	-36.6	3.25	40.43	54	-13.57	-	-	343	217	H
3	* 12277.83	46.45	PK-U	39	-34.6	0	50.85	-	-	74	-23.15	16	231	H
	* 12277.826	34.73	ADR	39	-34.6	3.25	42.38	54	-11.62	-	-	16	231	H
4	2399.748	57.83	PK-U	32.5	-44.6	0	45.73	-	-	88.2	-42.47	30	191	V
	2400.022	48.69	ADR	32.5	-44.6	3.25	39.84	68.2	-28.36	-	-	30	191	V
5	* 9388.029	48.94	PK-U	36.6	-36.6	0	48.94	-	-	74	-25.06	294	153	V
	* 9390.539	37.02	ADR	36.6	-36.7	3.25	40.17	54	-13.83	-	-	294	153	V
6	* 12282.347	46.86	PK-U	39	-34.7	0	51.16	-	-	74	-22.84	302	259	V
	* 12284.908	34.84	ADR	39	-34.7	3.25	42.39	54	-11.61	-	-	302	259	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL

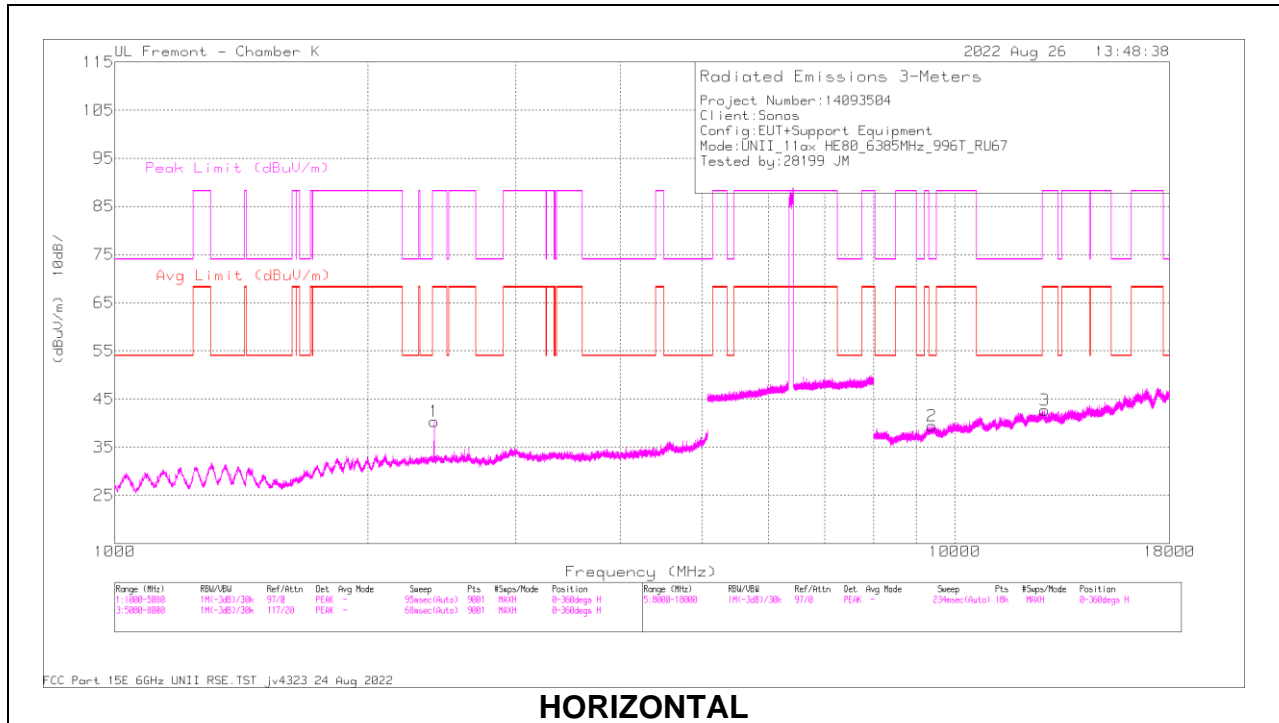

HORIZONTAL

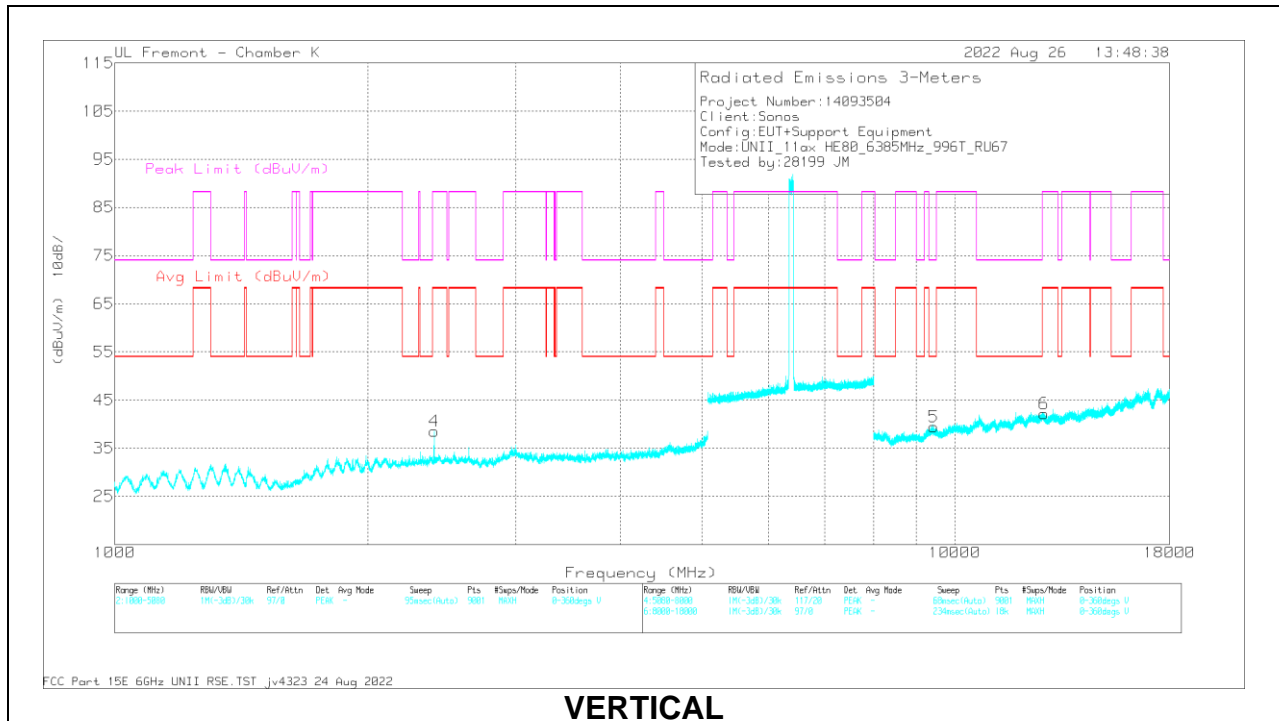

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.372	59.74	PK-U	32.5	-44.7	0	47.54	-	-	88.2	-40.66	273	316	H
	2400.047	50.92	ADR	32.5	-44.6	3.25	42.07	68.2	-26.13	-	-	273	316	H
2	* 9394.763	49.14	PK-U	36.6	-36.6	0	49.14	-	-	74	-24.86	355	275	H
	* 9395.303	37.26	ADR	36.6	-36.6	3.25	40.51	54	-13.49	-	-	355	275	H
3	12782.924	46.19	PK-U	39.2	-34.3	0	51.09	-	-	88.2	-37.11	286	366	H
	12783.444	34.78	ADR	39.2	-34.3	3.25	42.93	68.2	-25.27	-	-	286	366	H
4	2399.907	58.37	PK-U	32.5	-44.6	0	46.27	-	-	88.2	-41.93	177	99	V
	2400.007	49.34	ADR	32.5	-44.6	3.25	40.49	68.2	-27.71	-	-	177	99	V
5	* 9443.294	49.27	PK-U	36.6	-36.5	0	49.37	-	-	74	-24.63	192	378	V
	* 9443.01	36.89	ADR	36.6	-36.5	3.25	40.24	54	-13.76	-	-	192	378	V
6	12769.226	46.75	PK-U	39.2	-34.3	0	51.65	-	-	88.2	-36.55	356	213	V
	12771.172	34.55	ADR	39.2	-34.3	3.25	42.7	68.2	-25.5	-	-	356	213	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.4. TX ABOVE 1 GHz 802.11ax HE20 MODE IN THE UNII-6 BAND


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 0

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

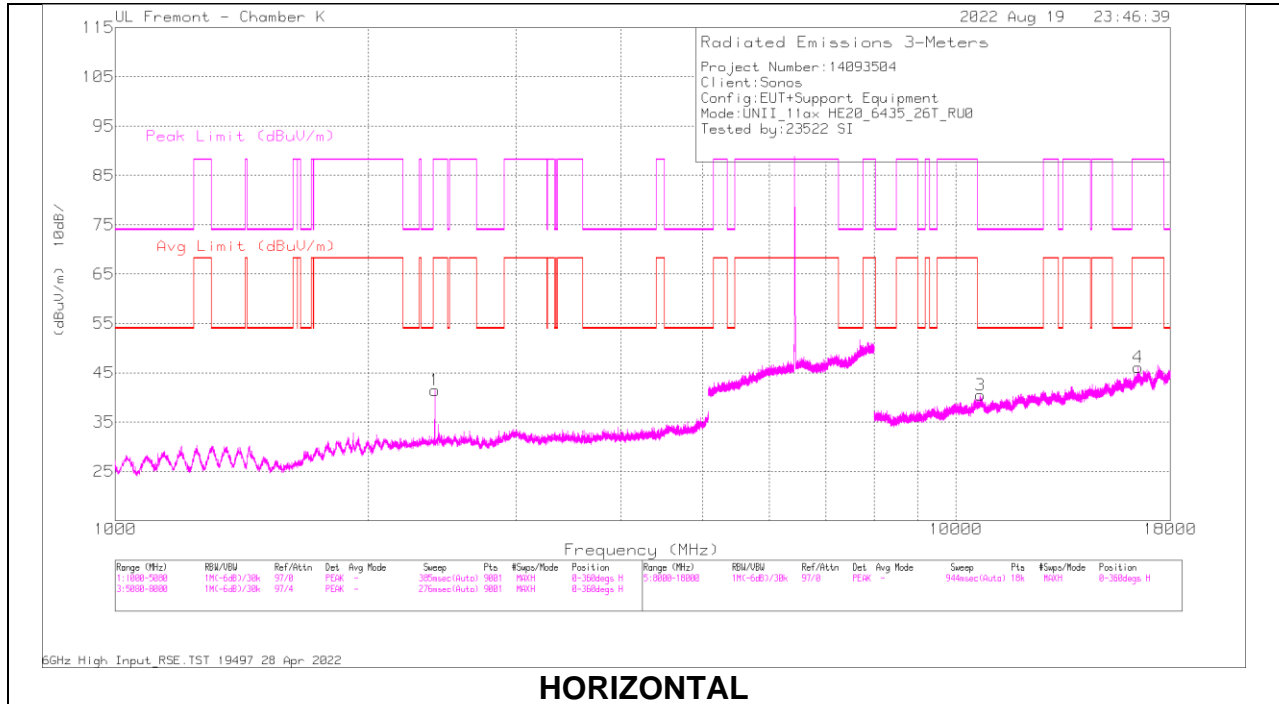

HORIZONTAL

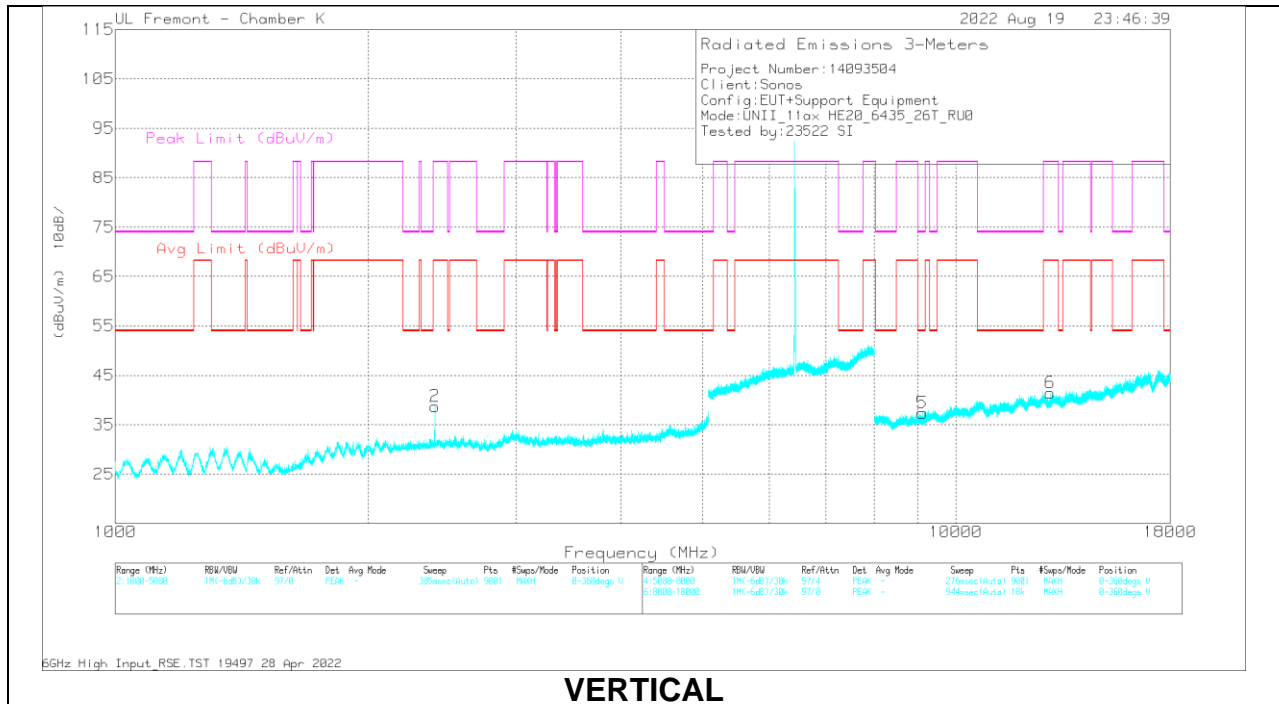

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.096	60.37	PK-U	32.5	-44.6	0	48.27	-	-	88.2	-39.93	2	197	H
	2400.052	52.84	ADR	32.5	-44.6	1.96	42.7	68.2	-25.5	-	-	2	197	H
2	2400.226	58.35	PK-U	32.5	-44.6	0	46.25	-	-	88.2	-41.95	226	99	V
	2400.018	50.31	ADR	32.5	-44.6	1.96	40.17	68.2	-28.03	-	-	226	99	V
3	* 10695.691	47.5	PK-U	37.9	-36.4	0	49	-	-	74	-25	32	100	H
	* 10695.491	36.01	ADR	37.9	-36.4	1.96	39.47	54	-14.53	-	-	32	100	H
4	16487.016	46.14	PK-U	41.6	-33	0	54.74	-	-	88.2	-33.46	169	328	H
	16489.049	33.95	ADR	41.6	-33	1.96	44.51	68.2	-23.69	-	-	169	328	H
5	* 9125.15	46.06	PK-U	36.3	-36.6	0	45.76	-	-	74	-28.24	269	260	V
	* 9124.099	34.41	ADR	36.3	-36.7	1.96	35.97	54	-18.03	-	-	269	260	V
6	12952.214	45.06	PK-U	39.1	-34.1	0	50.06	-	-	88.2	-38.14	109	320	V
	12952.629	33.48	ADR	39.1	-34.1	1.96	40.44	68.2	-27.76	-	-	109	320	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 4

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL

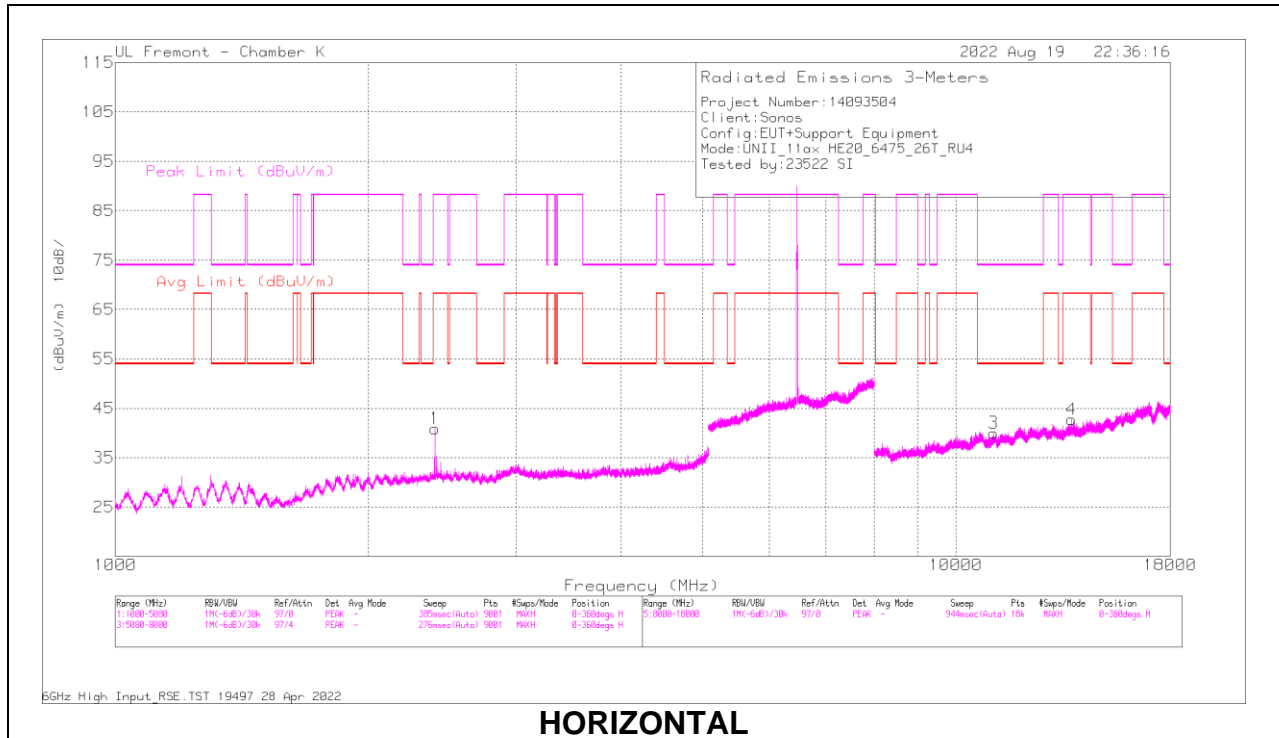

HORIZONTAL

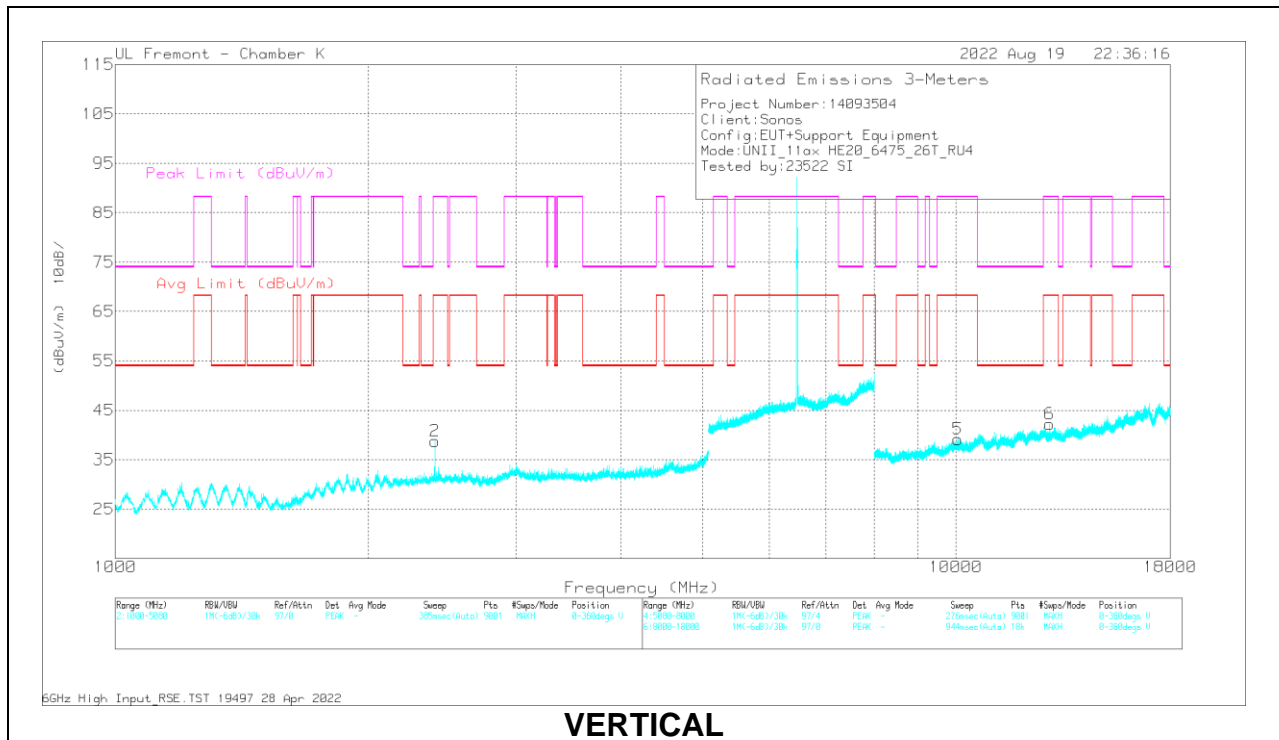

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.184	57.52	PK-U	32.5	-44.6	0	45.42	-	-	88.2	-42.78	360	220	H
	2400.096	49.88	ADR	32.5	-44.6	1.96	39.74	68.2	-28.46	-	-	360	220	H
2	2400.226	59.04	PK-U	32.5	-44.6	0	46.94	-	-	88.2	-41.26	39	163	V
	2400.058	51.14	ADR	32.5	-44.6	1.96	41	68.2	-27.2	-	-	39	163	V
3	* 11099.162	46.71	PK-U	37.9	-36.2	0	48.41	-	-	74	-25.59	327	147	H
	* 11098.075	35.13	ADR	37.9	-36.2	1.96	38.79	54	-15.21	-	-	327	147	H
4	13731.112	46.03	PK-U	38.8	-34.1	0	50.73	-	-	88.2	-37.47	262	133	H
	13731.028	34.14	ADR	38.8	-34.1	1.96	40.8	68.2	-27.4	-	-	262	133	H
5	10057.933	46.82	PK-U	37.5	-36.3	0	48.02	-	-	88.2	-40.18	201	135	V
	10060.49	35.07	ADR	37.5	-36.3	1.96	38.23	68.2	-29.97	-	-	201	135	V
6	12933.605	44.81	PK-U	39.1	-34.2	0	49.71	-	-	88.2	-38.49	146	363	V
	12934.193	33.35	ADR	39.1	-34.3	1.96	40.11	68.2	-28.09	-	-	146	363	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 8

HARMONICS AND SPURIOUS EMISSIONS

HIGH CHANNEL

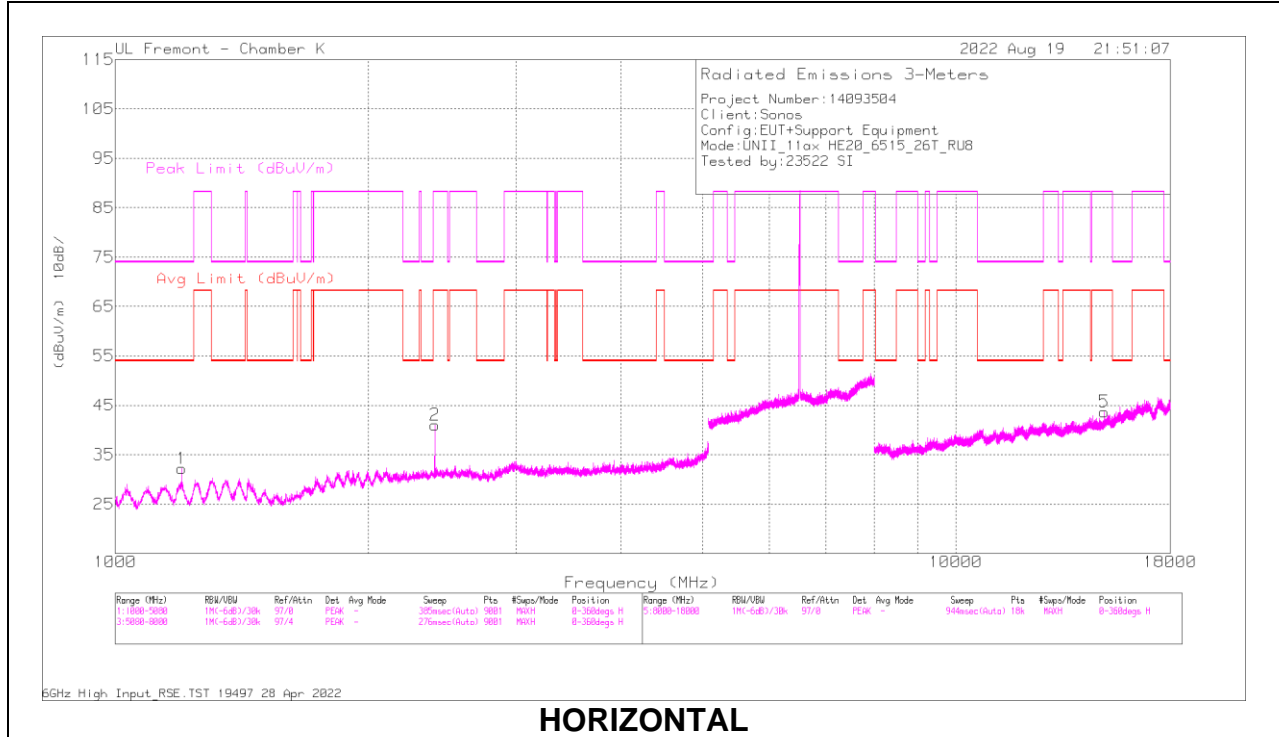

HORIZONTAL

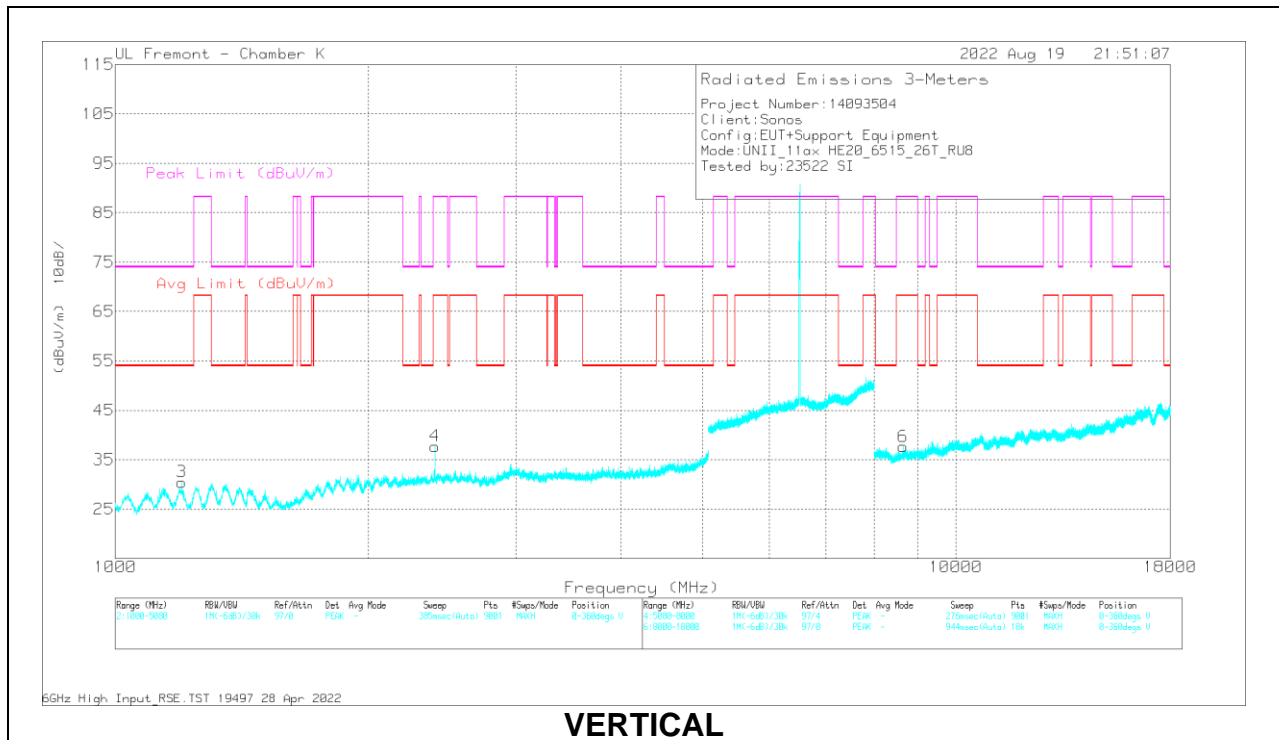

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1199.904	58.05	PK-U	28.6	-46.5	0	40.15	-	-	74	-33.85	334	285	H
	* 1199.968	47.06	ADR	28.6	-46.5	1.96	31.12	54	-22.88	-	-	334	285	H
2	2400.072	59.72	PK-U	32.5	-44.6	0	47.62	-	-	88.2	-40.58	3	192	H
	2400.076	52.7	ADR	32.5	-44.6	1.96	42.56	68.2	-25.64	-	-	3	192	H
3	* 1200.12	57.89	PK-U	28.6	-46.5	0	39.99	-	-	74	-34.01	214	110	V
	* 1199.988	47.47	ADR	28.6	-46.5	1.96	31.53	54	-22.47	-	-	214	110	V
4	2400.256	57.76	PK-U	32.5	-44.6	0	45.66	-	-	88.2	-42.54	227	99	V
	2400.04	50.51	ADR	32.5	-44.6	1.96	40.37	68.2	-27.83	-	-	227	99	V
5	15028.106	45.67	PK-U	39.8	-34.3	0	51.17	-	-	88.2	-37.03	243	383	H
	15024.854	33.7	ADR	39.8	-34.3	1.96	41.16	68.2	-27.04	-	-	243	383	H
6	8664.544	46.74	PK-U	35.9	-37	0	45.64	-	-	88.2	-42.56	8	270	V
	8664.016	35.63	ADR	35.9	-37	1.96	36.49	68.2	-31.71	-	-	8	270	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 242-Tones, RU Index 61

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

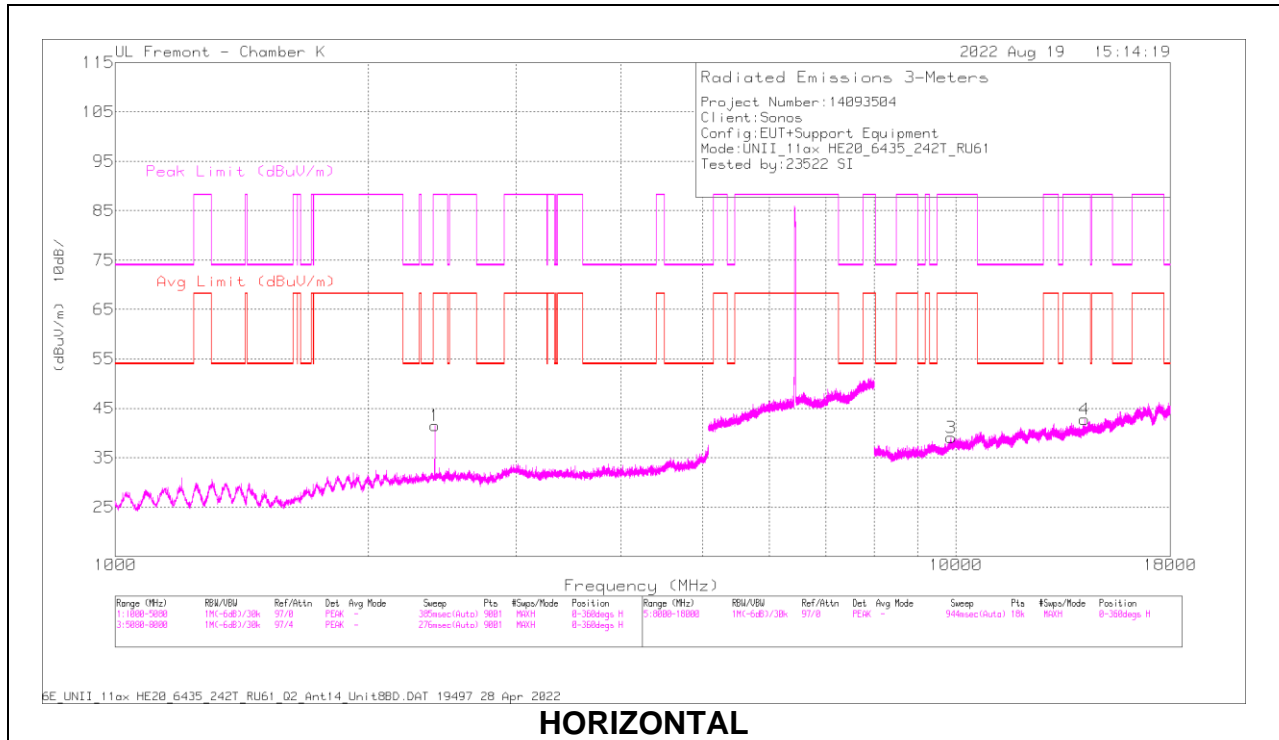

HORIZONTAL

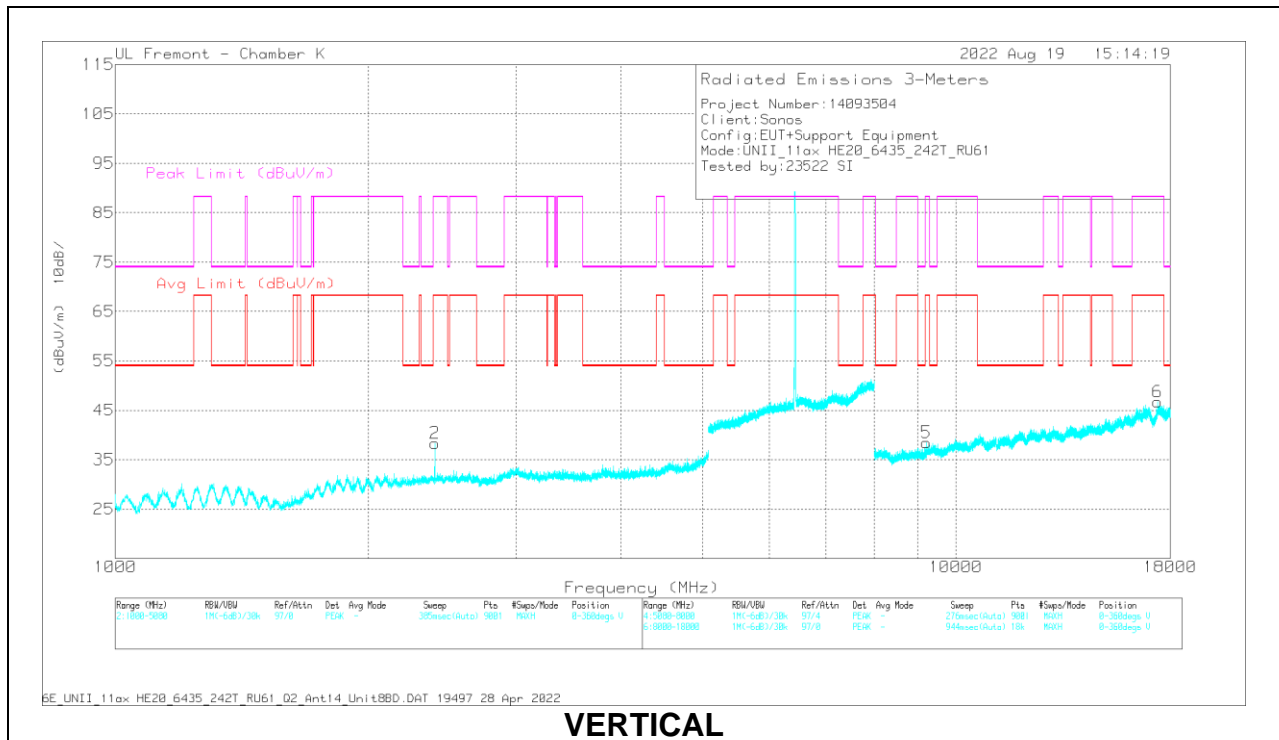

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2399.964	60.55	PK-U	32.5	-44.6	0	48.45	-	-	88.2	-39.75	3	195	H
	2400.044	52.91	ADR	32.5	-44.6	2.91	43.72	68.2	-24.48	-	-	3	195	H
2	2400.404	57.52	PK-U	32.5	-44.7	0	45.32	-	-	88.2	-42.88	79	99	V
	2400.084	49.24	ADR	32.5	-44.6	2.91	40.05	68.2	-28.15	-	-	79	99	V
3	9876.619	46.96	PK-U	37.2	-36.5	0	47.66	-	-	88.2	-40.54	348	215	H
	9877.179	35.46	ADR	37.2	-36.5	2.91	39.07	68.2	-29.13	-	-	348	215	H
4	14228.107	46.61	PK-U	39.1	-34.9	0	50.81	-	-	88.2	-37.39	186	386	H
	14230.209	34.42	ADR	39.1	-34.9	2.91	41.53	68.2	-26.67	-	-	186	386	H
5	9232.374	47.02	PK-U	36.4	-36.6	0	46.82	-	-	88.2	-41.38	233	342	V
	9231.479	35.27	ADR	36.4	-36.6	2.91	37.98	68.2	-30.22	-	-	233	342	V
6	17388.596	44.29	PK-U	41.4	-30.6	0	55.09	-	-	88.2	-33.11	71	182	V
	17386.294	32.29	ADR	41.4	-30.6	2.91	46	68.2	-22.2	-	-	71	182	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL

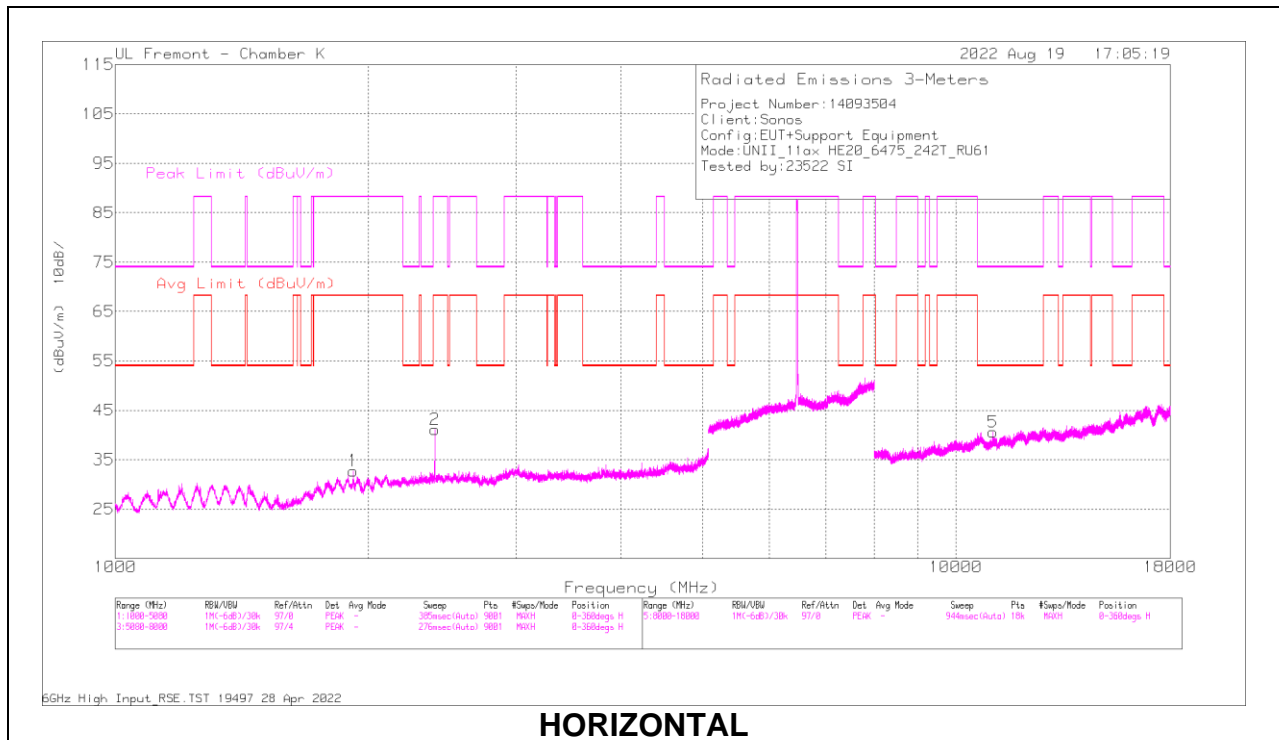

HORIZONTAL

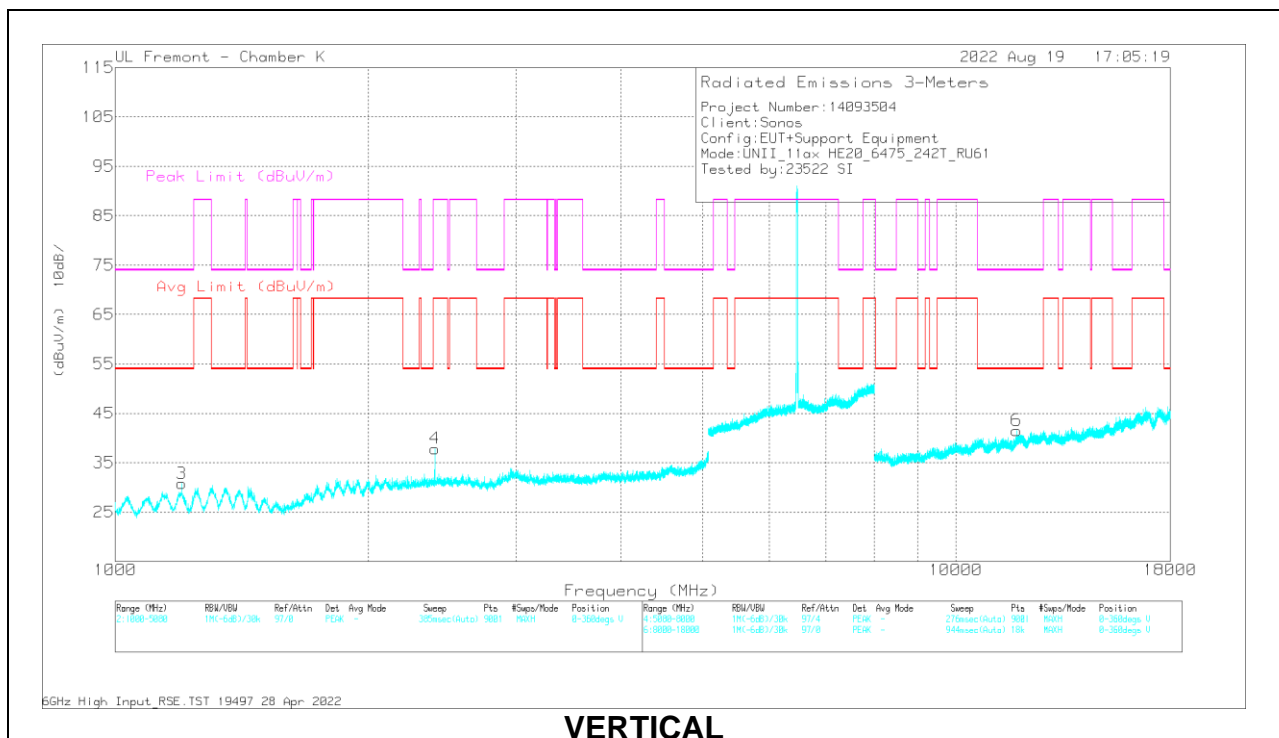

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1919.577	60.28	PK-U	31.2	-45.3	0	46.18	-	-	88.2	-42.02	52	147	H
	1920.012	45.04	ADR	31.2	-45.4	2.91	33.75	68.2	-34.45	-	-	52	147	H
2	2400.024	60.18	PK-U	32.5	-44.6	0	48.08	-	-	88.2	-40.12	356	200	H
	2400.088	52.35	ADR	32.5	-44.6	2.91	43.16	68.2	-25.04	-	-	356	200	H
3	* 1198.469	58.74	PK-U	28.6	-46.4	0	40.94	-	-	74	-33.06	216	193	V
	* 1199.976	47.55	ADR	28.6	-46.5	2.91	32.56	54	-21.44	-	-	216	193	V
4	2399.984	58.71	PK-U	32.5	-44.6	0	46.61	-	-	88.2	-41.59	226	100	V
	2400.048	50.46	ADR	32.5	-44.6	2.91	41.27	68.2	-26.93	-	-	226	100	V
5	* 11077.696	47.27	PK-U	37.9	-36.4	0	48.77	-	-	74	-25.23	227	375	H
	* 11079.443	35.35	ADR	37.9	-36.4	2.91	39.76	54	-14.24	-	-	227	375	H
6	* 11816.329	45.75	PK-U	38.5	-35.1	0	49.15	-	-	74	-24.85	50	393	V
	* 11816.309	34.05	ADR	38.5	-35.1	2.91	40.36	54	-13.64	-	-	50	393	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL

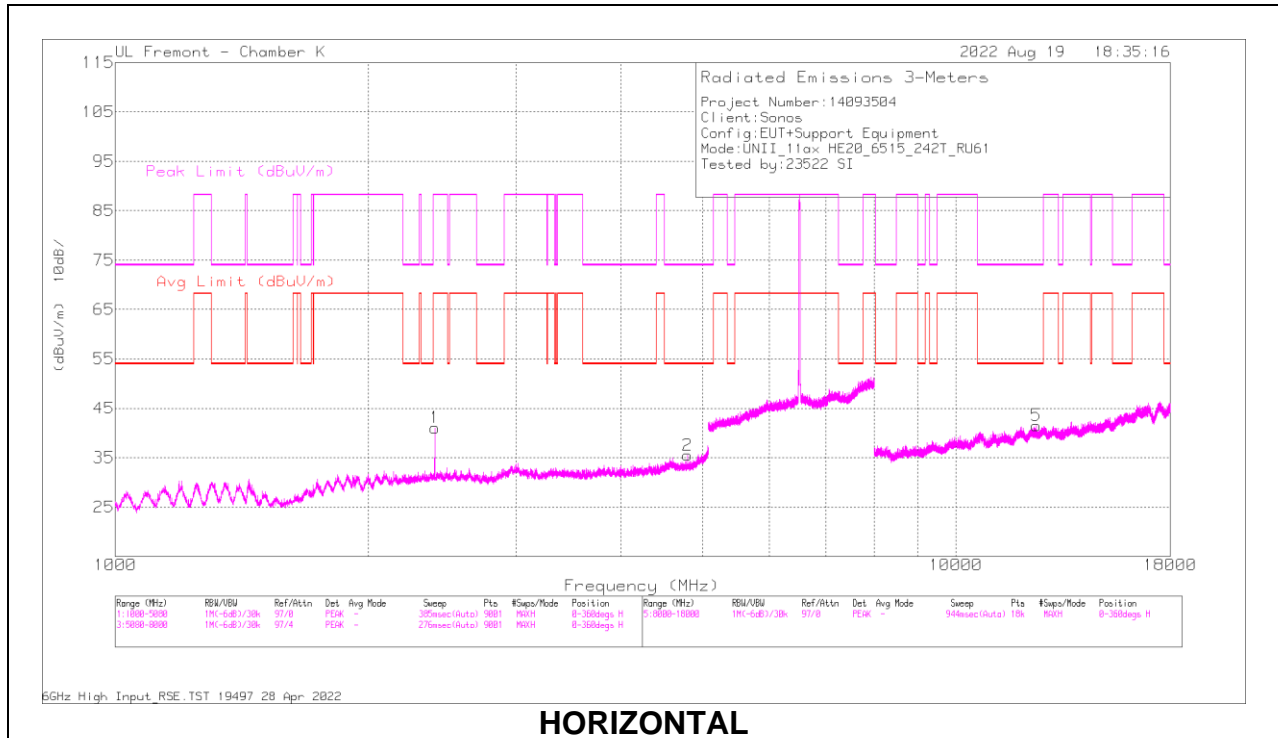

HORIZONTAL

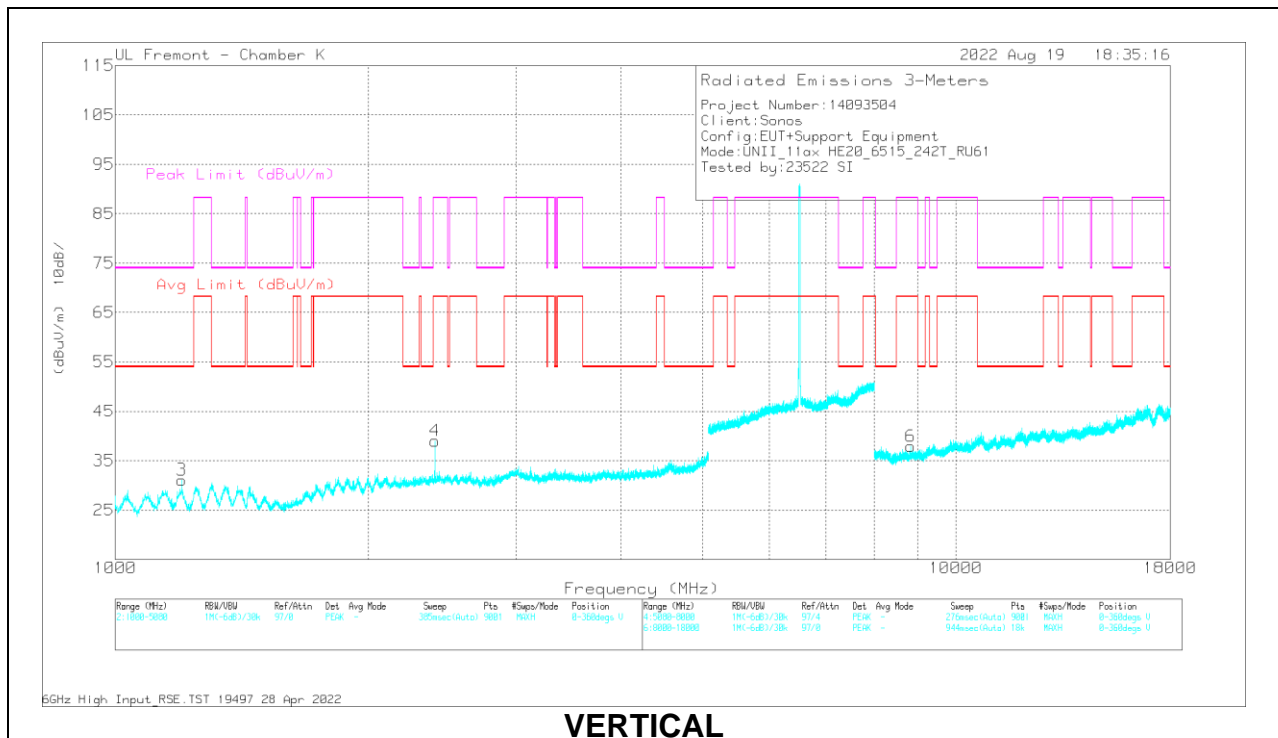

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2399.892	57.52	PK-U	32.5	-44.6	0	45.42	-	-	88.2	-42.78	360	217	H
	2399.996	49.67	ADR	32.5	-44.6	2.91	40.48	68.2	-27.72	-	-	360	217	H
2	* 4800.183	51.12	PK-U	34.1	-40.3	0	44.92	-	-	74	-29.08	335	393	H
	* 4800.163	41.82	ADR	34.1	-40.3	2.91	38.53	54	-15.47	-	-	335	393	H
3	* 1199.968	58.38	PK-U	28.6	-46.5	0	40.48	-	-	74	-33.52	216	101	V
	* 1200.08	47.71	ADR	28.6	-46.5	2.91	32.72	54	-21.28	-	-	216	101	V
4	2400.016	58.53	PK-U	32.5	-44.6	0	46.43	-	-	88.2	-41.77	227	99	V
	2400.06	50.42	ADR	32.5	-44.6	2.91	41.23	68.2	-26.97	-	-	227	99	V
5	* 12469.57	44.88	PK-U	39	-34.3	0	49.58	-	-	74	-24.42	31	395	H
	* 12468.144	33.44	ADR	39	-34.3	2.91	41.05	54	-12.95	-	-	31	395	H
6	8837.152	47.12	PK-U	35.9	-36.9	0	46.12	-	-	88.2	-42.08	181	319	V
	8839.634	35.26	ADR	35.9	-36.9	2.91	37.17	68.2	-31.03	-	-	181	319	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.5. TX ABOVE 1 GHz 802.11ax HE40 MODE IN THE UNII-6 BAND


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 0

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

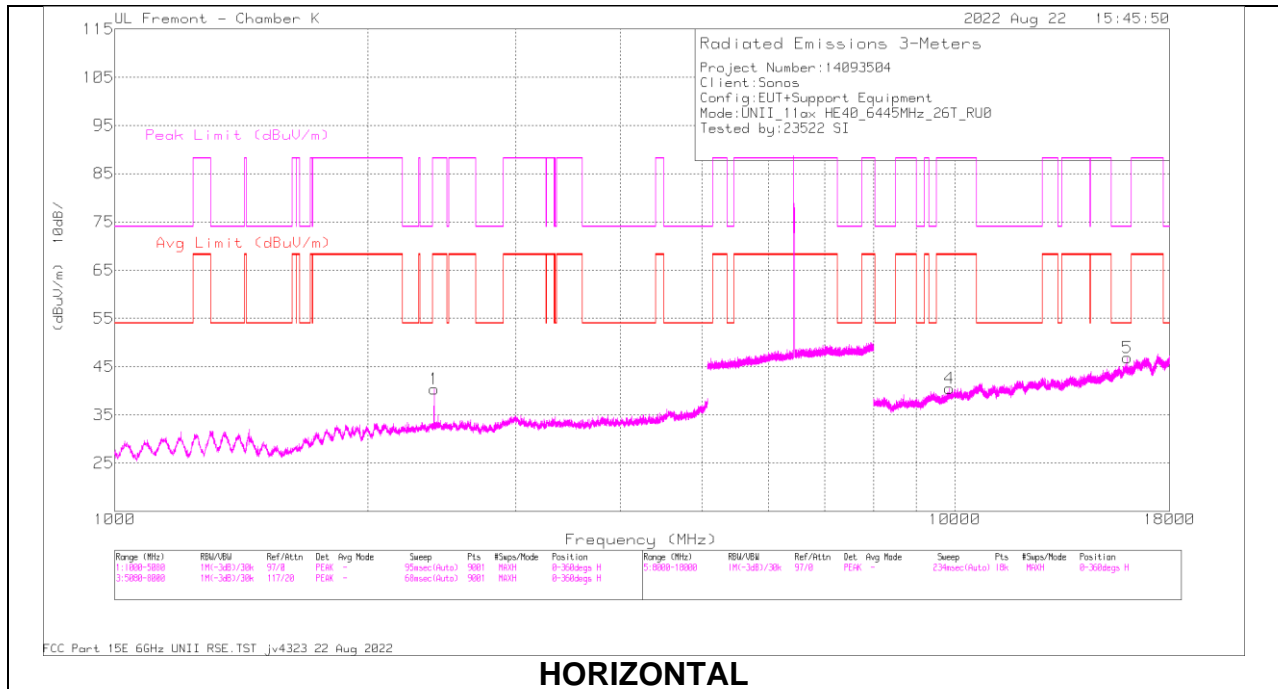

HORIZONTAL

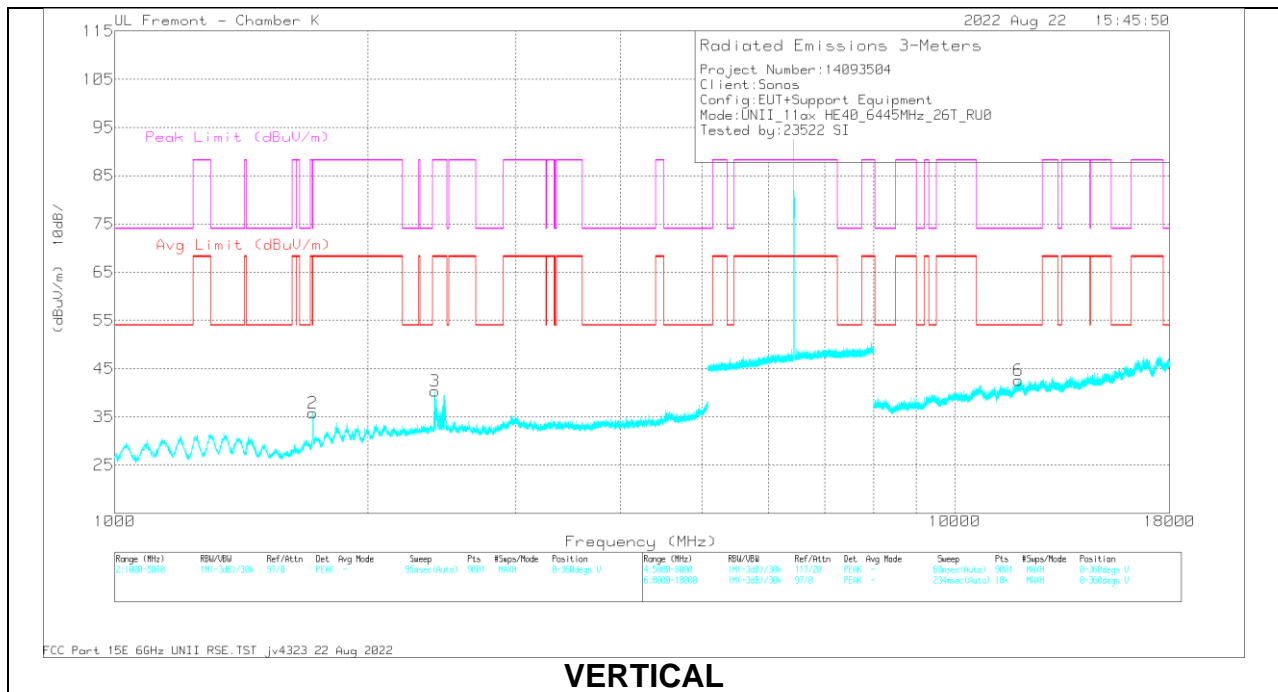

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2399.868	61.78	PK-U	32.5	-44.6	0	49.68	-	-	88.2	-38.52	339	224	H
	2400.048	52.69	ADR	32.5	-44.6	1.96	42.55	68.2	-25.65	-	-	339	224	H
2	* 1721.563	56.77	PK-U	29.1	-46.4	0	39.47	-	-	74	-34.53	195	214	V
	* 1720.293	45.08	ADR	29.1	-46.4	1.96	29.74	54	-24.26	-	-	195	214	V
3	2407.669	55.56	PK-U	32.5	-44.6	0	43.46	-	-	88.2	-44.74	359	186	V
	2405.675	43.13	ADR	32.5	-44.6	1.96	32.99	68.2	-35.21	-	-	359	186	V
4	9858.183	49.03	PK-U	37.2	-36.4	0	49.83	-	-	88.2	-38.37	306	162	H
	9858.539	36.9	ADR	37.2	-36.4	1.96	39.66	68.2	-28.54	-	-	306	162	H
5	* 16048.094	46.92	PK-U	41.2	-33.5	0	54.62	-	-	74	-19.38	31	370	H
	* 16045.105	35.07	ADR	41.2	-33.3	1.96	44.93	54	-9.07	-	-	31	370	H
6	* 11906.48	48.07	PK-U	38.6	-34.9	0	51.77	-	-	74	-22.23	6	393	V
	* 11907.215	35.94	ADR	38.6	-34.9	1.96	41.6	54	-12.4	-	-	6	393	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 17

HARMONICS AND SPURIOUS EMISSIONS

HIGH CHANNEL

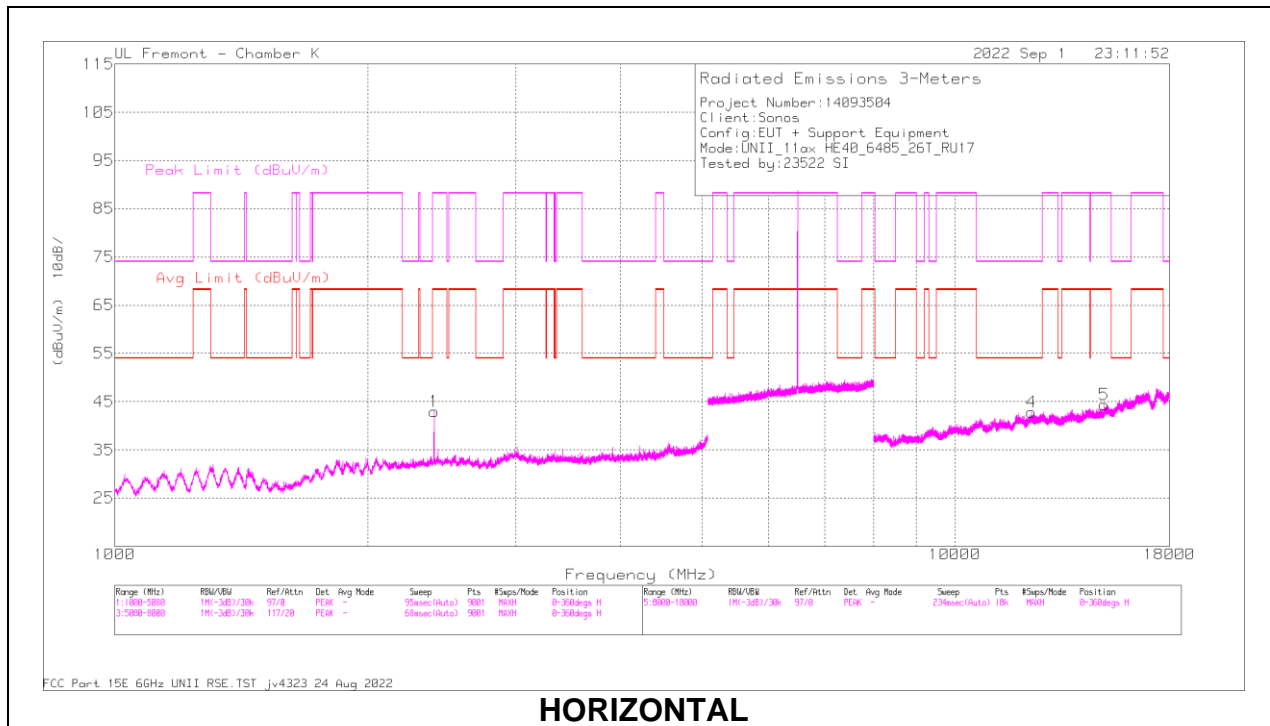

HORIZONTAL

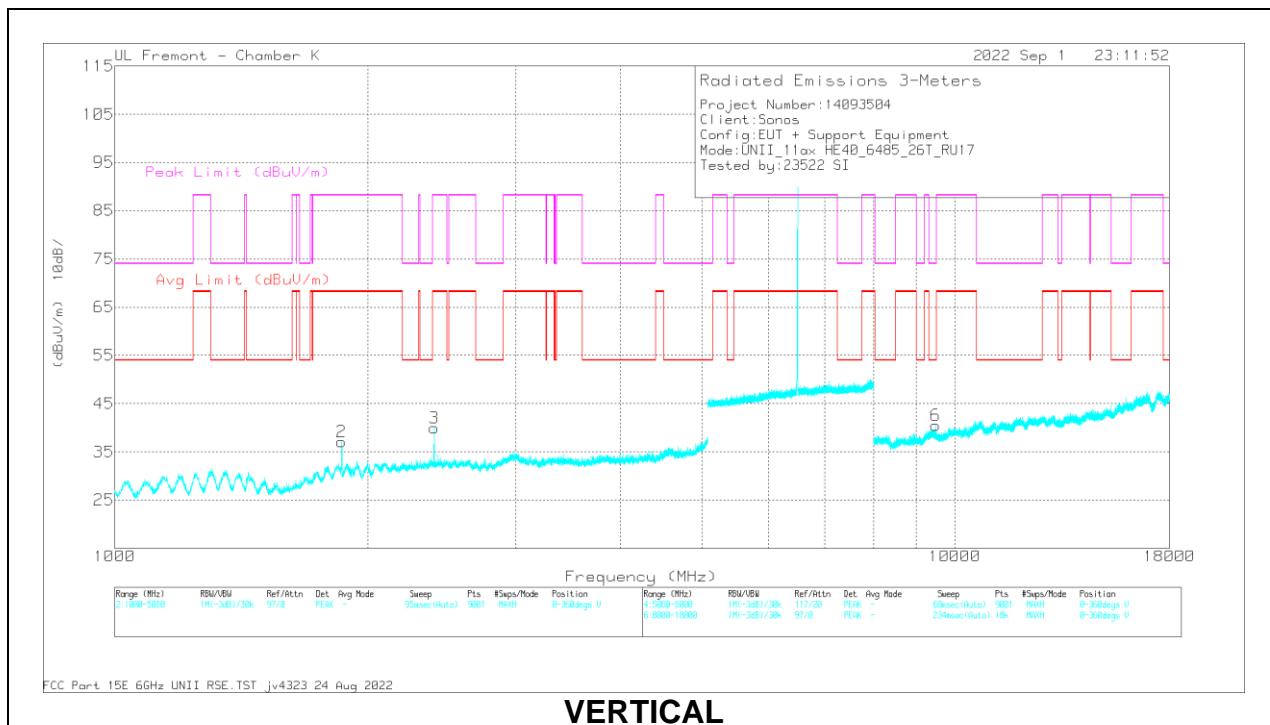

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2399.952	63.85	PK-U	32.5	-44.6	0	51.75	-	-	88.2	-36.45	257	98	H
	2400.008	55.1	ADR	32.5	-44.6	1.96	44.96	68.2	-23.24	-	-	257	98	H
2	1862.371	55.64	PK-U	31.1	-45.8	0	40.94	-	-	88.2	-47.26	79	359	V
	1861.364	43.79	ADR	31.1	-45.7	1.96	31.15	68.2	-37.05	-	-	79	359	V
3	2399.788	61.06	PK-U	32.5	-44.6	0	48.96	-	-	88.2	-39.24	180	198	V
	2400.016	51.53	ADR	32.5	-44.6	1.96	41.39	68.2	-26.81	-	-	180	198	V
4	* 12331.48	47.14	PK-U	39	-34.5	0	51.64	-	-	74	-22.36	31	307	H
	* 12331.12	35.07	ADR	39	-34.4	1.96	41.63	54	-12.37	-	-	31	307	H
5	15063.768	47.48	PK-U	39.8	-34.1	0	53.18	-	-	88.2	-35.02	93	393	H
	15061.654	35.33	ADR	39.8	-34.2	1.96	42.89	68.2	-25.31	-	-	93	393	H
6	* 9489.966	48.54	PK-U	36.7	-36.6	0	48.64	-	-	74	-25.36	301	394	V
	* 9493.323	36.86	ADR	36.7	-36.6	1.96	38.92	54	-15.08	-	-	301	394	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STRADDLE CHANNEL

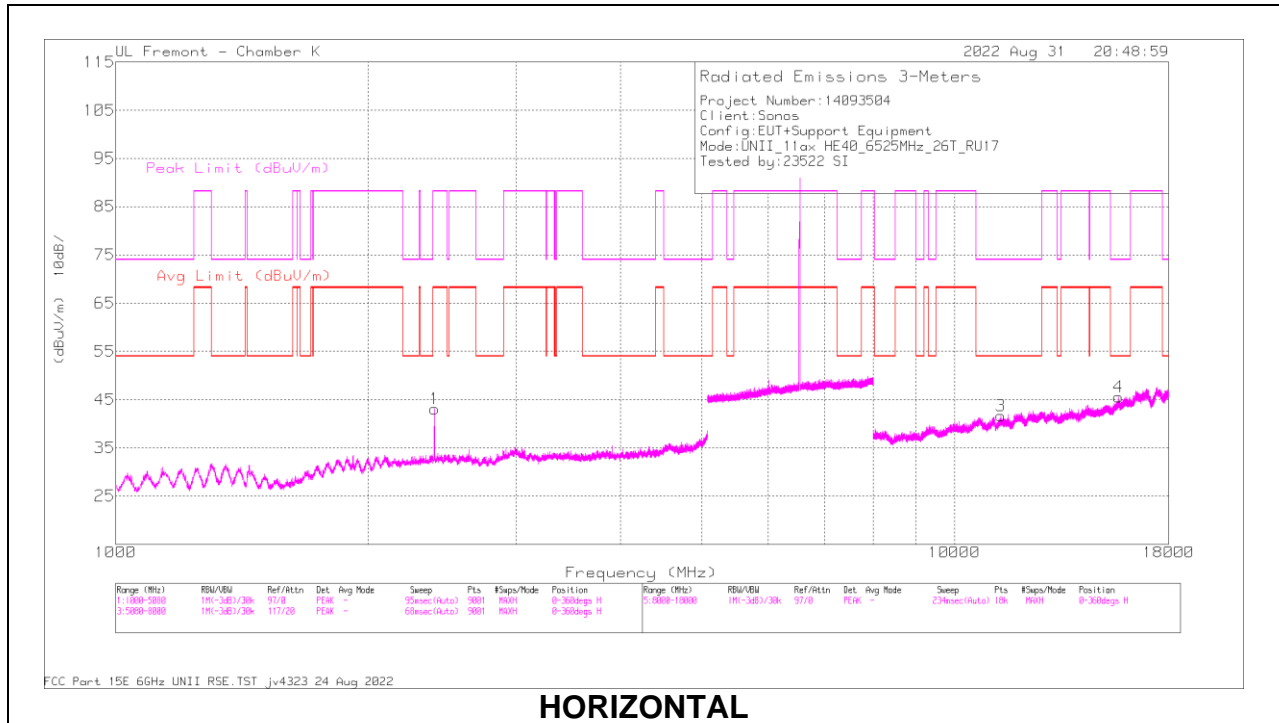

HORIZONTAL

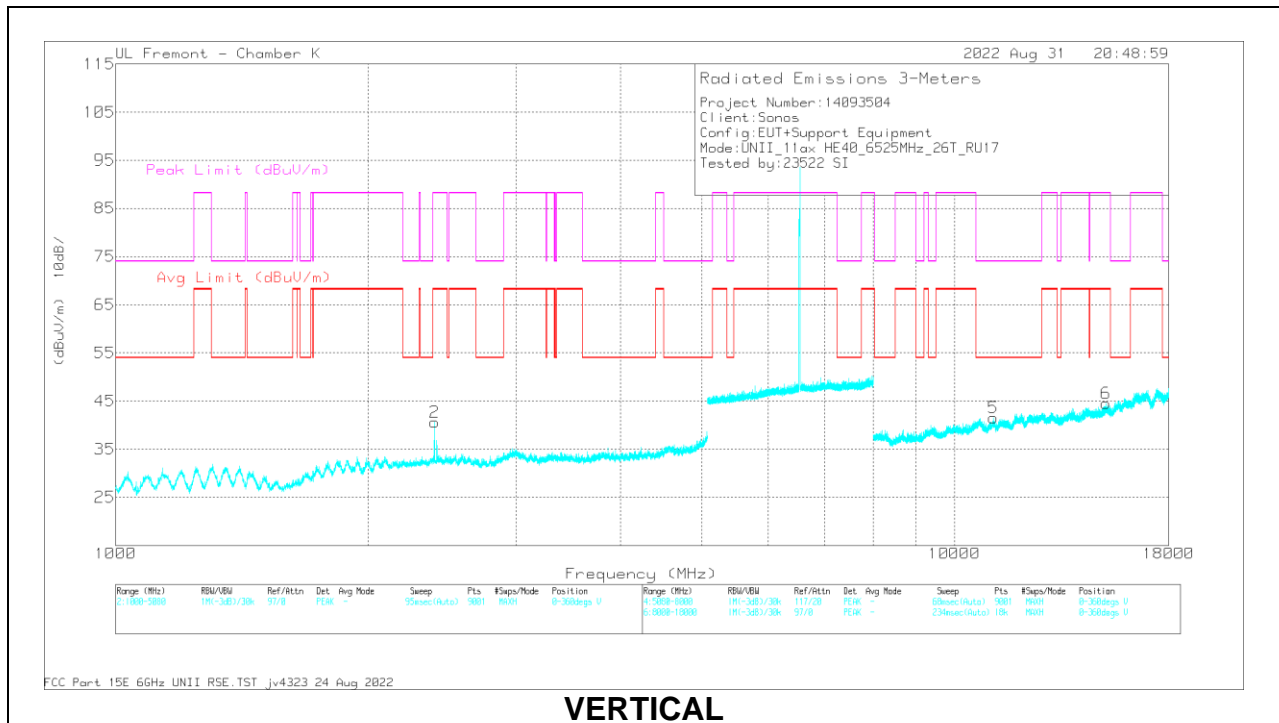

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2399.776	63.04	PK-U	32.5	-44.6	0	50.94	-	-	88.2	-37.26	216	123	H
	2400.04	54.36	ADR	32.5	-44.6	1.96	44.22	68.2	-23.98	-	-	216	123	H
2	2400.272	62.15	PK-U	32.5	-44.6	0	50.05	-	-	88.2	-38.15	308	179	V
	2400.084	53.33	ADR	32.5	-44.6	1.96	43.19	68.2	-25.01	-	-	308	179	V
3	* 11355.179	48.52	PK-U	38.1	-36.1	0	50.52	-	-	74	-23.48	332	335	H
	* 11353.984	36.67	ADR	38.1	-36.1	1.96	40.63	54	-13.37	-	-	332	335	H
4	* 15698.833	47	PK-U	40.6	-33.1	0	54.5	-	-	74	-19.5	258	211	H
	* 15698.174	35.2	ADR	40.6	-33.1	1.96	44.66	54	-9.34	-	-	258	211	H
5	* 11135.623	49.09	PK-U	38	-36	0	51.09	-	-	74	-22.91	84	351	V
	* 11135.579	36.73	ADR	38	-36	1.96	40.69	54	-13.31	-	-	84	351	V
6	15169.486	46.7	PK-U	39.9	-33.8	0	52.8	-	-	88.2	-35.4	13	347	V
	15170.993	35.46	ADR	39.9	-33.8	1.96	43.52	68.2	-24.68	-	-	13	347	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 484-Tones, RU Index 65

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

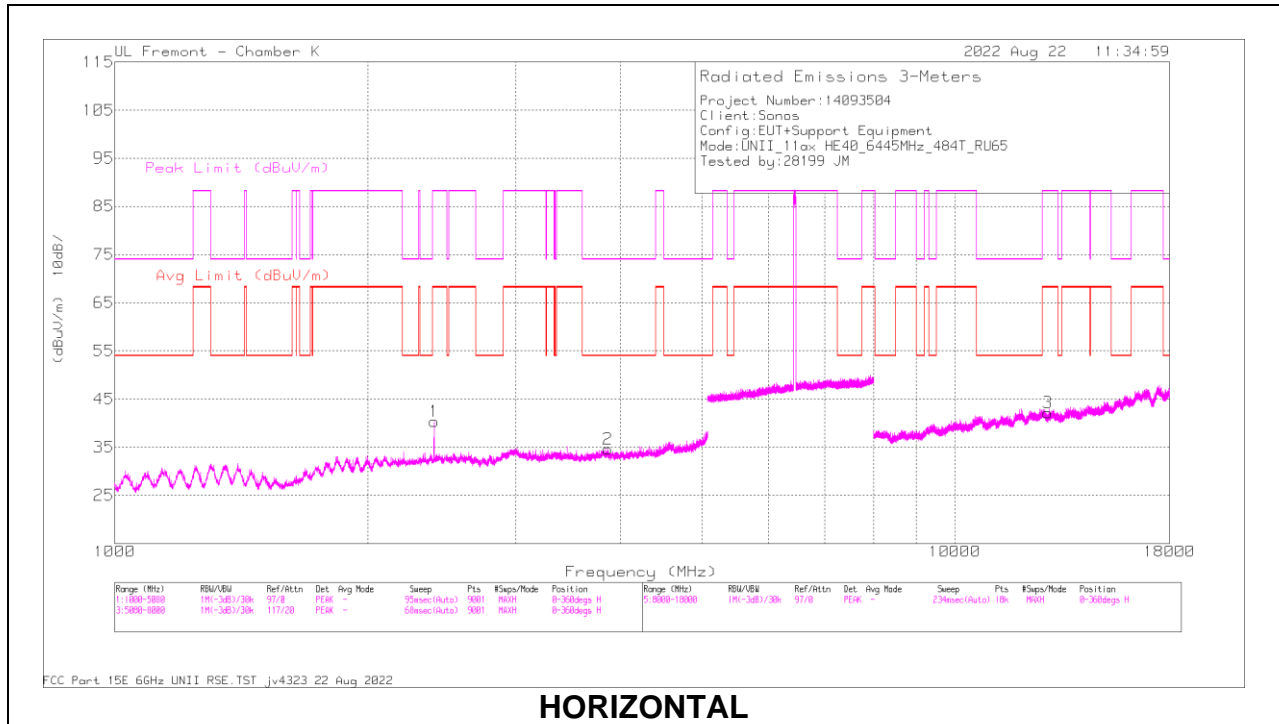

HORIZONTAL

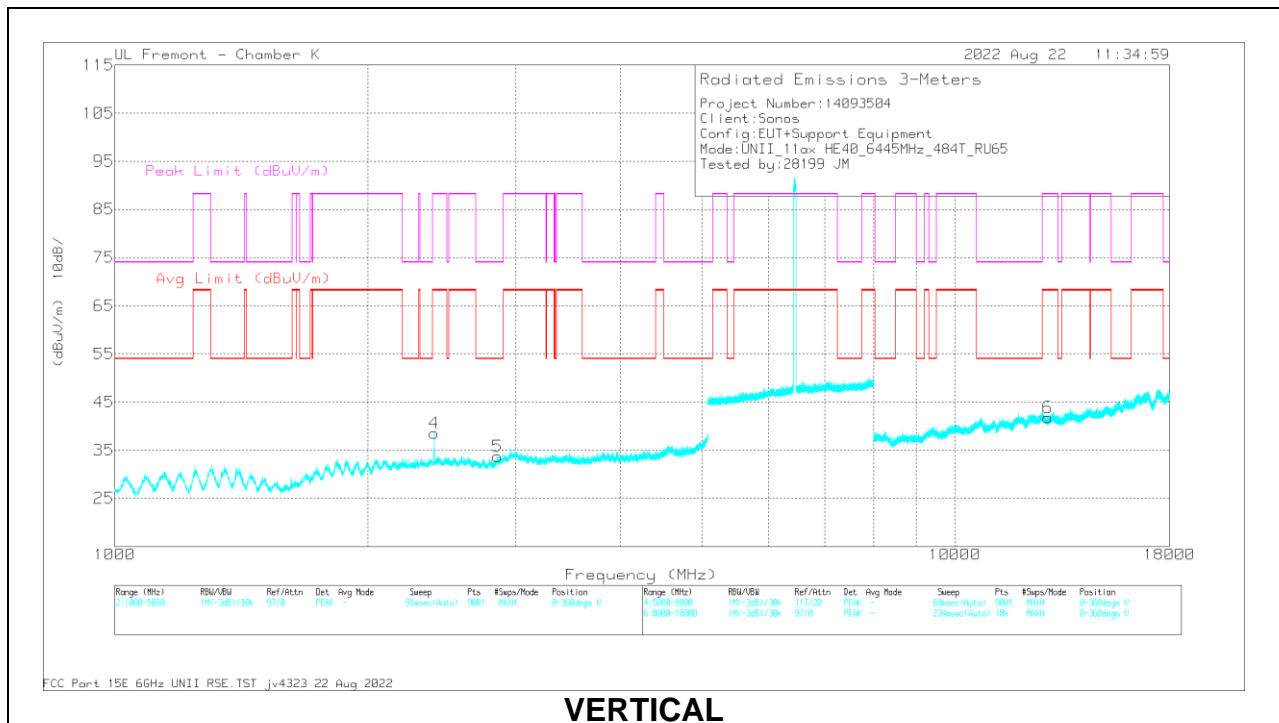

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.362	62.57	PK-U	32.5	-44.7	0	50.37	-	-	88.2	-37.83	123	198	H
	2400.042	52.88	ADR	32.5	-44.6	2.96	43.74	68.2	-24.46	-	-	123	198	H
2	* 3860.546	62.68	PK-U	33.5	-41.7	0	44.48	-	-	74	-29.52	339	277	H
	* 3863.731	40.53	ADR	33.5	-41.7	2.96	35.29	54	-18.71	-	-	339	277	H
3	12906.127	47.12	PK-U	39.1	-34.1	0	52.12	-	-	88.2	-36.08	241	363	H
	12908.295	34.83	ADR	39.1	-34.1	2.96	42.79	68.2	-25.41	-	-	241	363	H
4	2399.917	61.63	PK-U	32.5	-44.6	0	49.53	-	-	88.2	-38.67	37	135	V
	2400.042	51.83	ADR	32.5	-44.6	2.96	42.69	68.2	-25.51	-	-	37	135	V
5	* 2854.359	54.02	PK-U	32.6	-43.3	0	43.32	-	-	74	-30.68	343	179	V
	* 2854.1	41.91	ADR	32.6	-43.3	2.96	34.17	54	-19.83	-	-	343	179	V
6	12893.56	46.49	PK-U	39.1	-34.2	0	51.39	-	-	88.2	-36.81	147	251	V
	12892.213	34.57	ADR	39.1	-34.2	2.96	42.43	68.2	-25.77	-	-	147	251	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL

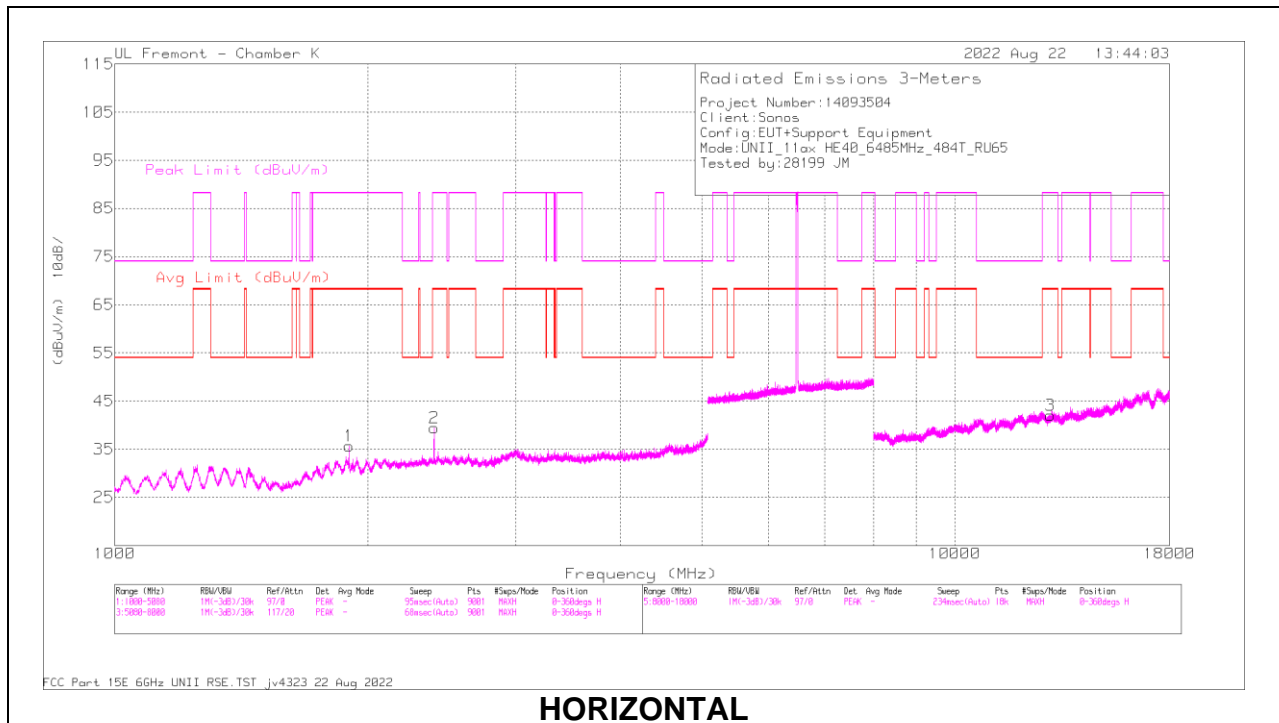

HORIZONTAL

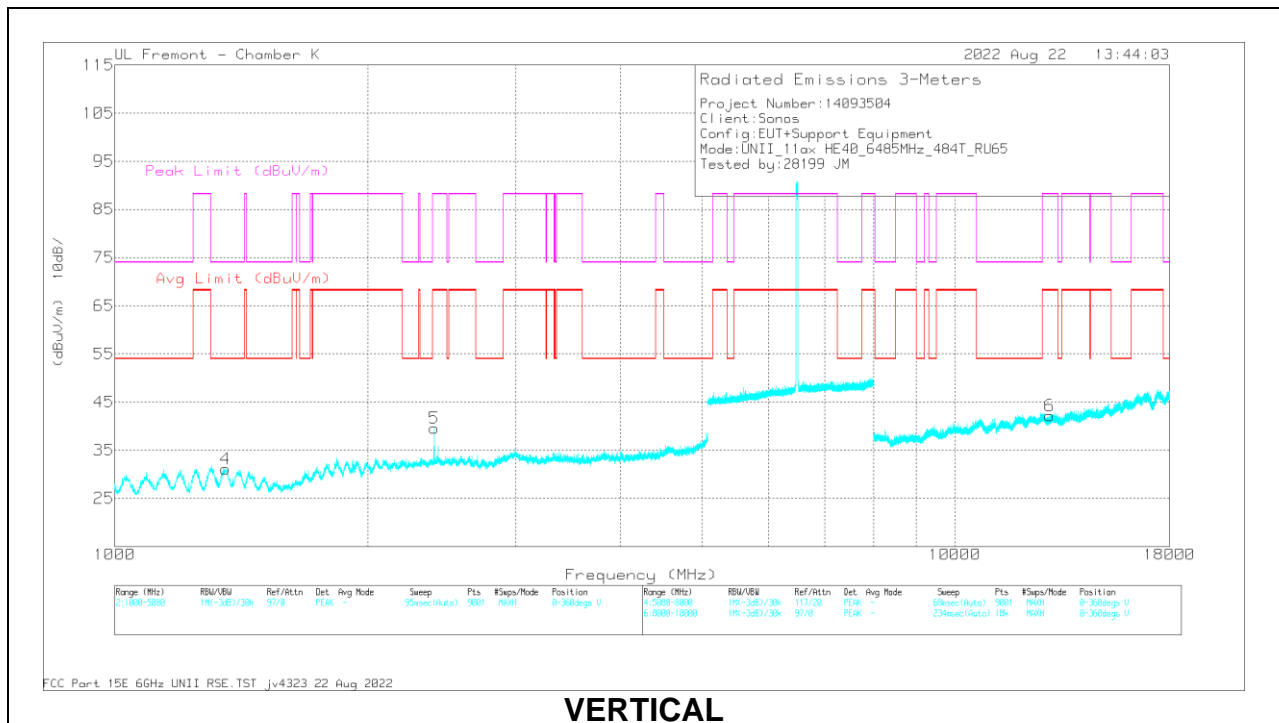

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1900.647	70.52	PK-U	31.1	-45.7	0	55.92	-	-	88.2	-32.28	269	136	H
	1899.984	44.72	ADR	31.1	-45.8	2.96	32.98	68.2	-35.22	-	-	269	136	H
2	2399.946	62.21	PK-U	32.5	-44.6	0	50.11	-	-	88.2	-38.09	343	221	H
	2400.091	52.88	ADR	32.5	-44.6	2.96	43.74	68.2	-24.46	-	-	343	221	H
3	12984.45	46.53	PK-U	39.1	-34.3	0	51.33	-	-	88.2	-36.87	187	134	H
	12986.145	34.66	ADR	39.1	-34.3	2.96	42.42	68.2	-25.78	-	-	187	134	H
4	1353.895	59.24	PK-U	29.1	-46.1	0	42.24	-	-	74	-31.76	251	175	V
	* 1356.048	46.36	ADR	29	-46.2	2.96	32.12	54	-21.88	-	-	251	175	V
5	2400.437	62.27	PK-U	32.5	-44.7	0	50.07	-	-	88.2	-38.13	5	300	V
	2400.032	52.53	ADR	32.5	-44.6	2.96	43.39	68.2	-24.81	-	-	5	300	V
6	12965.662	47.01	PK-U	39.1	-34	0	52.11	-	-	88.2	-36.09	329	394	V
	12966.13	34.94	ADR	39.1	-34	2.96	43	68.2	-25.2	-	-	329	394	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STRADDLE CHANNEL

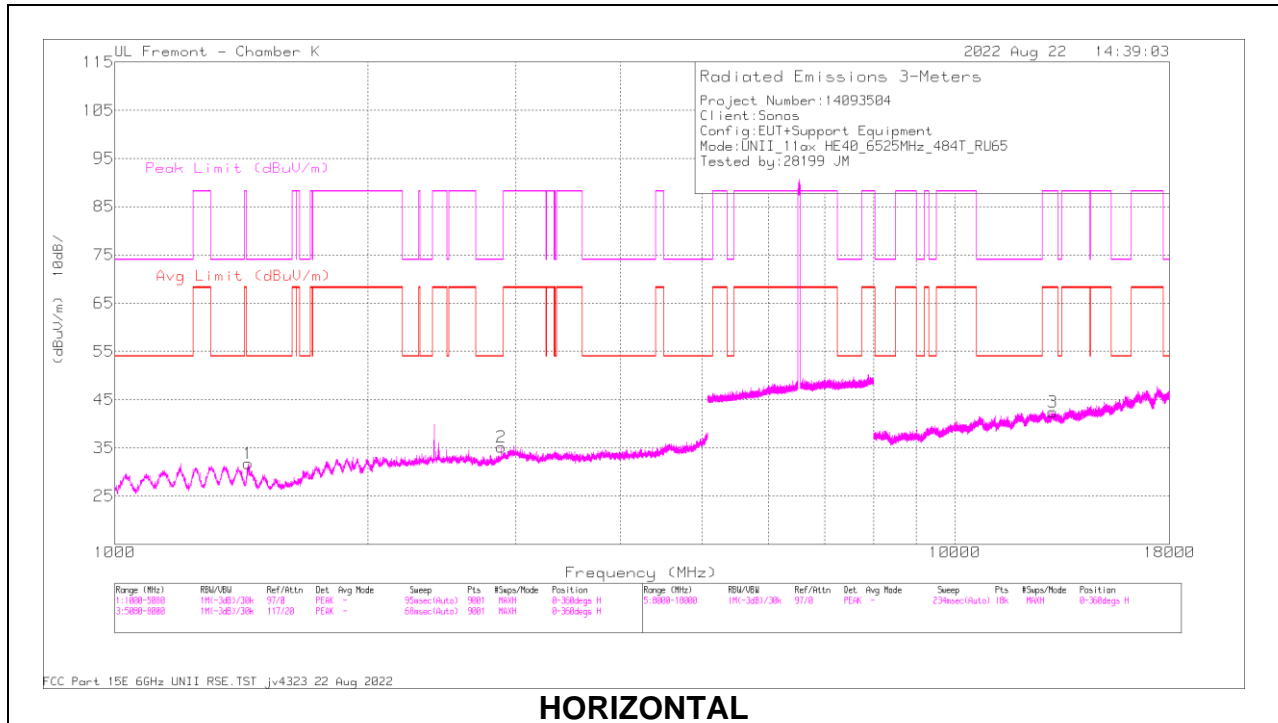

HORIZONTAL

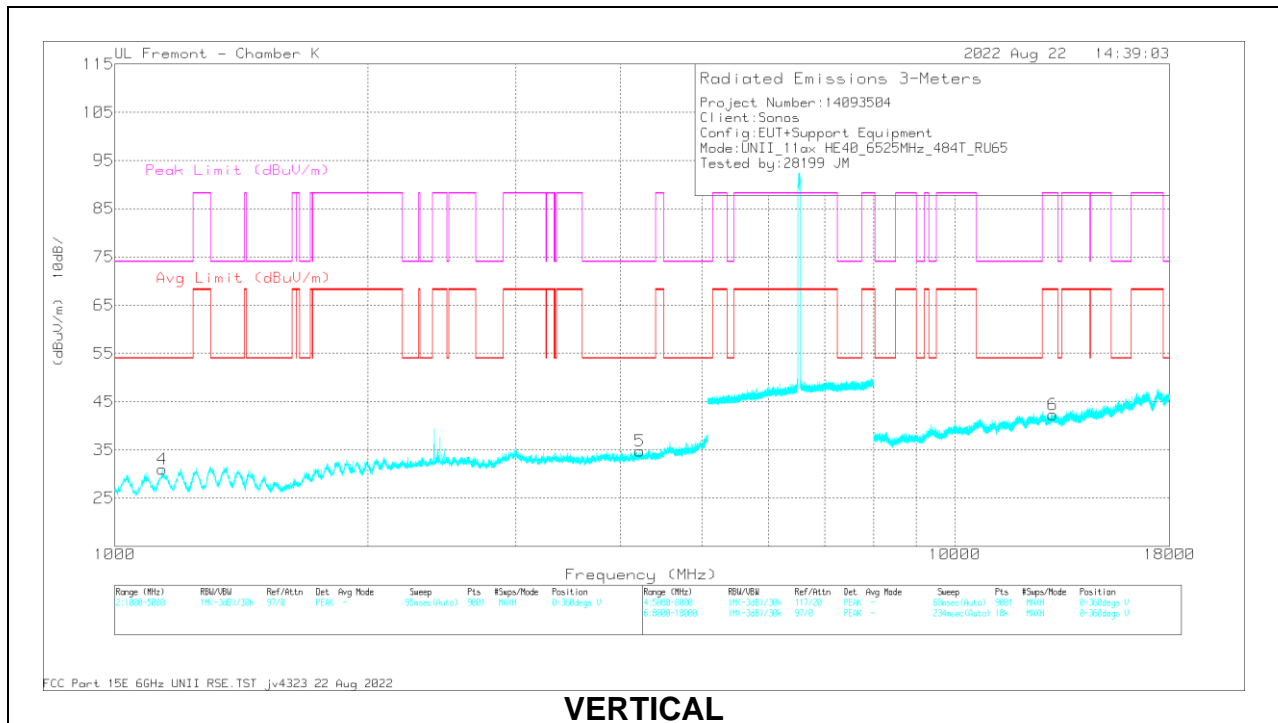

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1440.254	68.67	PK-U	28.2	-45.9	0	50.97	-	-	74	-23.03	30	103	H
	* 1441.892	47.6	ADR	28.1	-45.9	2.96	32.76	54	-21.24	-	-	30	103	H
2	* 2885.889	53.72	PK-U	32.8	-43.3	0	43.22	-	-	74	-30.78	301	165	H
	* 2885.022	41.93	ADR	32.8	-43.2	2.96	34.49	54	-19.51	-	-	301	165	H
3	13069.393	47.16	PK-U	39	-34.1	0	52.06	-	-	88.2	-36.14	242	217	H
	13069.337	35.42	ADR	39	-34.1	2.96	43.28	68.2	-24.92	-	-	242	217	H
4	* 1139.356	58.7	PK-U	28.3	-46.7	0	40.3	-	-	74	-33.7	238	306	V
	* 1139.835	46.99	ADR	28.3	-46.8	2.96	31.45	54	-22.55	-	-	238	306	V
5	* 4220.149	51.79	PK-U	33.7	-41.4	0	44.09	-	-	74	-29.91	34	233	V
	* 4219.99	40.08	ADR	33.7	-41.4	2.96	35.34	54	-18.66	-	-	34	233	V
6	13079.565	47.04	PK-U	39	-34	0	52.04	-	-	88.2	-36.16	107	219	V
	13080.68	35.29	ADR	39	-34.1	2.96	43.15	68.2	-25.05	-	-	107	219	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.6. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE UNII-6 BAND


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 0

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL

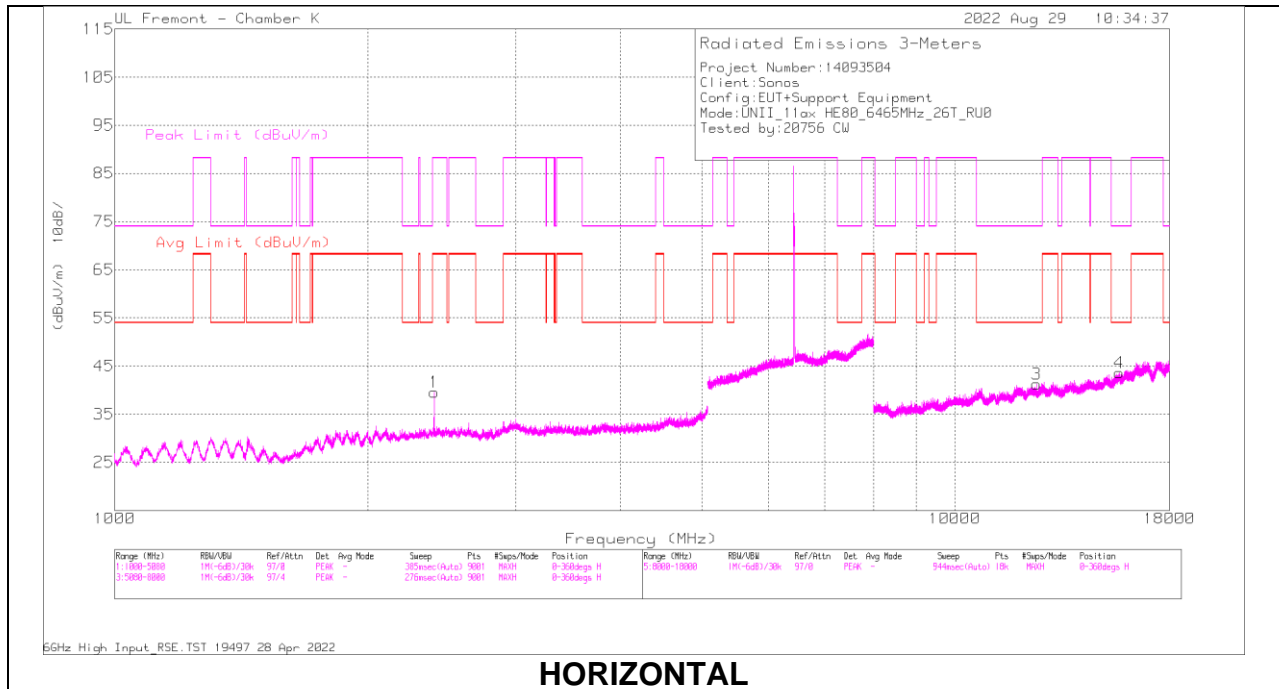

HORIZONTAL

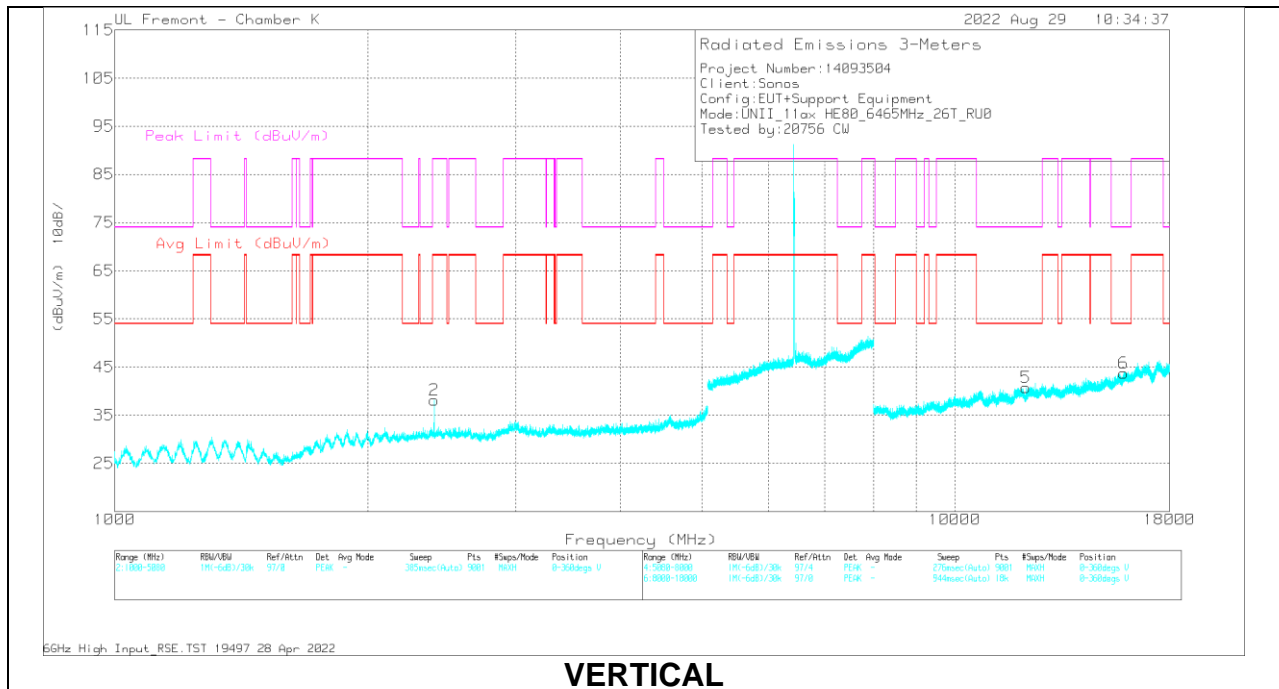

VERTICAL