

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.06	59.42	PK-U	32.5	-44.6	0	47.32	-	-	88.2	-40.88	289	172	H
	2400.04	51.79	ADR	32.5	-44.6	1.96	41.65	68.2	-26.55	-	-	289	172	H
2	2400.092	59.54	PK-U	32.5	-44.6	0	47.44	-	-	88.2	-40.76	15	298	V
	2400.056	52.24	ADR	32.5	-44.6	1.96	42.1	68.2	-26.1	-	-	15	298	V
3	* 12511.294	44.98	PK-U	39	-34.3	0	49.68	-	-	74	-24.32	329	357	H
	* 12510.415	33.38	ADR	39	-34.2	1.96	40.14	54	-13.86	-	-	329	357	H
4	* 15682.401	46.39	PK-U	40.6	-33.3	0	53.69	-	-	74	-20.31	26	369	H
	* 15682.513	34.06	ADR	40.6	-33.2	1.96	43.42	54	-10.58	-	-	26	369	H
5	* 12136.867	44.88	PK-U	38.9	-34.5	0	49.28	-	-	74	-24.72	40	343	V
	* 12138.153	33.51	ADR	38.9	-34.4	1.96	39.97	54	-14.03	-	-	40	343	V
6	* 15867.273	44.82	PK-U	40.8	-33.1	0	52.52	-	-	74	-21.48	222	225	V
	* 15867.185	33.15	ADR	40.8	-33.1	1.96	42.81	54	-11.19	-	-	222	225	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 18

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL

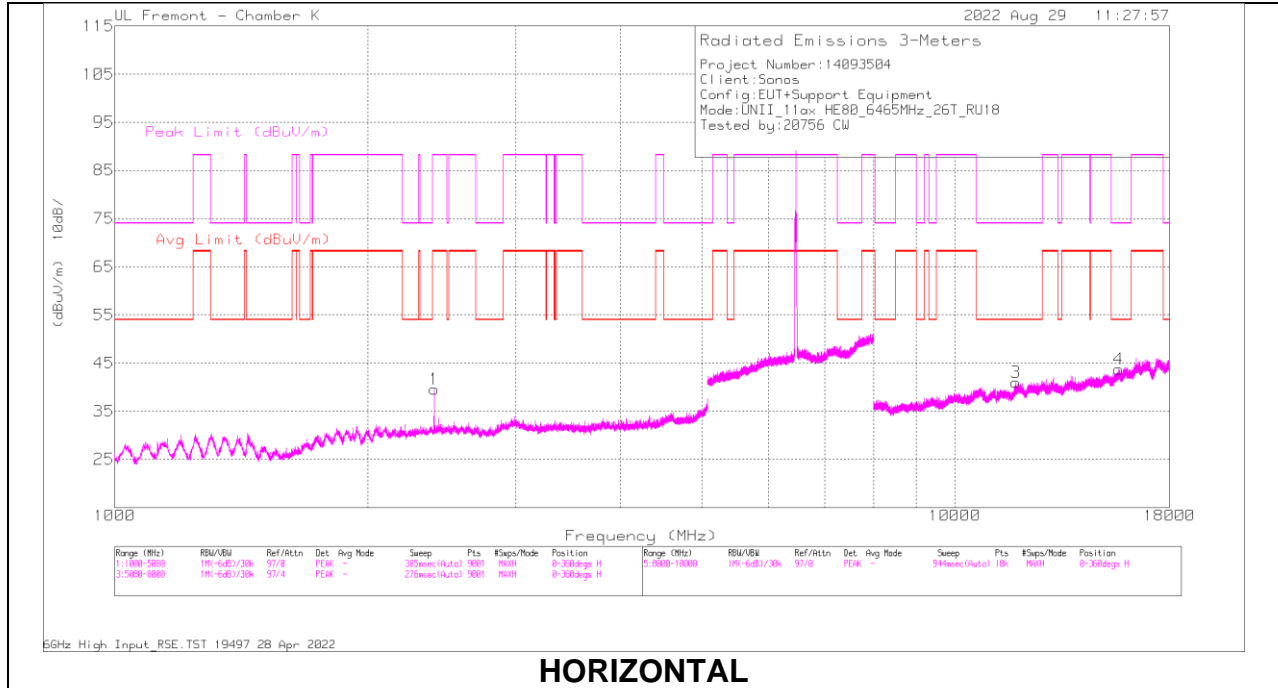

HORIZONTAL

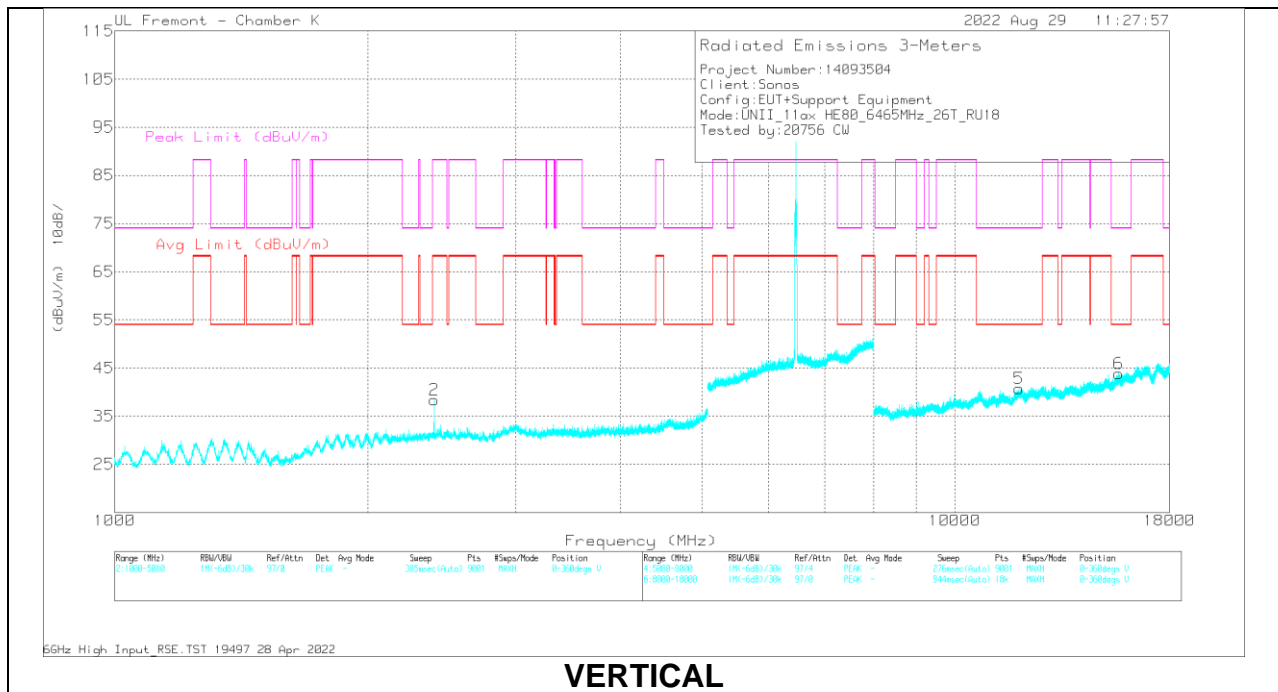

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.02	60.14	PK-U	32.5	-44.6	0	48.04	-	-	88.2	-40.16	286	147	H
	2400.056	52.43	ADR	32.5	-44.6	1.96	42.29	68.2	-25.91	-	-	286	147	H
2	2399.78	68.46	PK-U	32.5	-44.6	0	56.36	-	-	88.2	-31.84	16	299	V
	2400.088	52.3	ADR	32.5	-44.6	1.96	42.16	68.2	-26.04	-	-	16	299	V
3	* 11819.694	45.9	PK-U	38.5	-35.1	0	49.3	-	-	74	-24.7	296	250	H
	* 11820.533	34.09	ADR	38.5	-35.2	1.96	39.35	54	-14.65	-	-	296	250	H
4	* 15656.381	46.1	PK-U	40.6	-33.4	0	53.3	-	-	74	-20.7	236	158	H
	* 15656.073	33.95	ADR	40.6	-33.4	1.96	43.11	54	-10.89	-	-	236	158	H
5	* 11914.181	46.04	PK-U	38.6	-34.8	0	49.84	-	-	74	-24.16	172	262	V
	* 11915.48	34.38	ADR	38.6	-34.7	1.96	40.24	54	-13.76	-	-	172	262	V
6	* 15656.602	46.05	PK-U	40.6	-33.4	0	53.25	-	-	74	-20.75	146	236	V
	* 15656.655	34.23	ADR	40.6	-33.4	1.96	43.39	54	-10.61	-	-	146	236	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 36

HARMONICS AND SPURIOUS EMISSIONS

STRADDLE CHANNEL

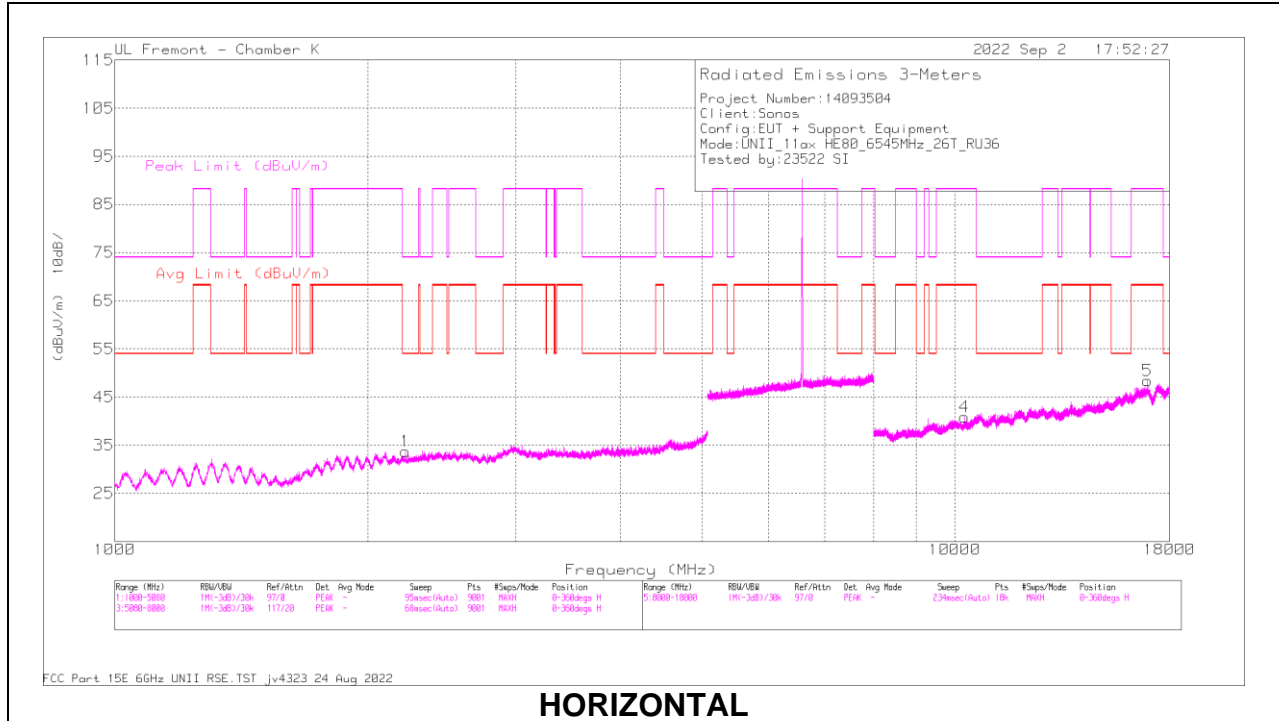

HORIZONTAL

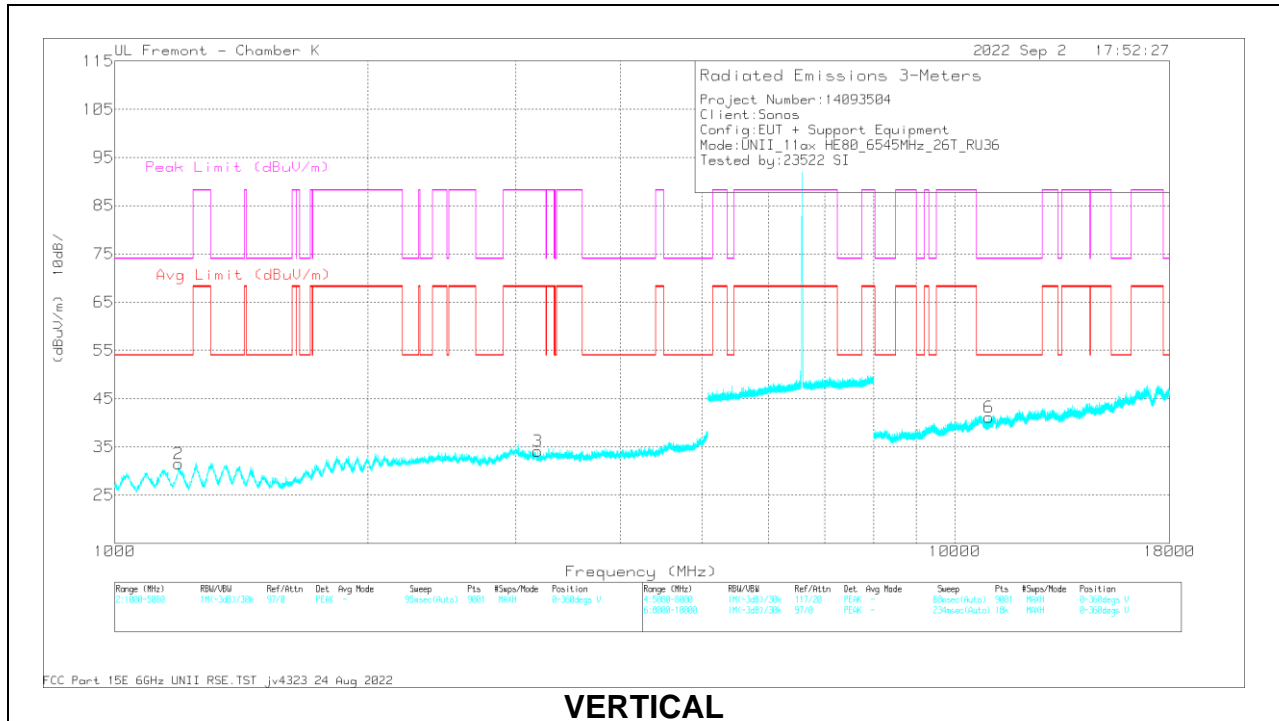

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2218.994	55.97	PK-U	31.6	-45.3	0	42.27	-	-	74	-31.73	314	291	H
	* 2217.919	44.1	ADR	31.6	-45.2	1.96	32.46	54	-21.54	-	-	314	291	H
2	* 1192.755	58.55	PK-U	28.6	-46.5	0	40.65	-	-	74	-33.35	313	298	V
	* 1192.523	46.55	ADR	28.6	-46.4	1.96	30.71	54	-23.29	-	-	313	298	V
3	3187.95	51.97	PK-U	33	-41.9	0	43.07	-	-	88.2	-45.13	336	371	V
	3190.092	40.16	ADR	33	-41.8	1.96	33.32	68.2	-34.88	-	-	336	371	V
4	10262.969	48.03	PK-U	37.6	-36.6	0	49.03	-	-	88.2	-39.17	109	394	H
	10264.863	36.6	ADR	37.6	-36.7	1.96	39.46	68.2	-28.74	-	-	109	394	H
5	16954.183	45.88	PK-U	42.1	-32.4	0	55.58	-	-	88.2	-32.62	2	325	H
	16950.419	34.37	ADR	42.1	-32.4	1.96	46.03	68.2	-22.17	-	-	2	325	H
6	* 10985.879	48.67	PK-U	37.9	-36.6	0	49.97	-	-	74	-24.03	258	247	V
	* 10985.987	36.39	ADR	37.9	-36.6	1.96	39.65	54	-14.35	-	-	258	247	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 1 + Antenna 4 OFDMA MODE: 996-Tones, RU Index 67

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL

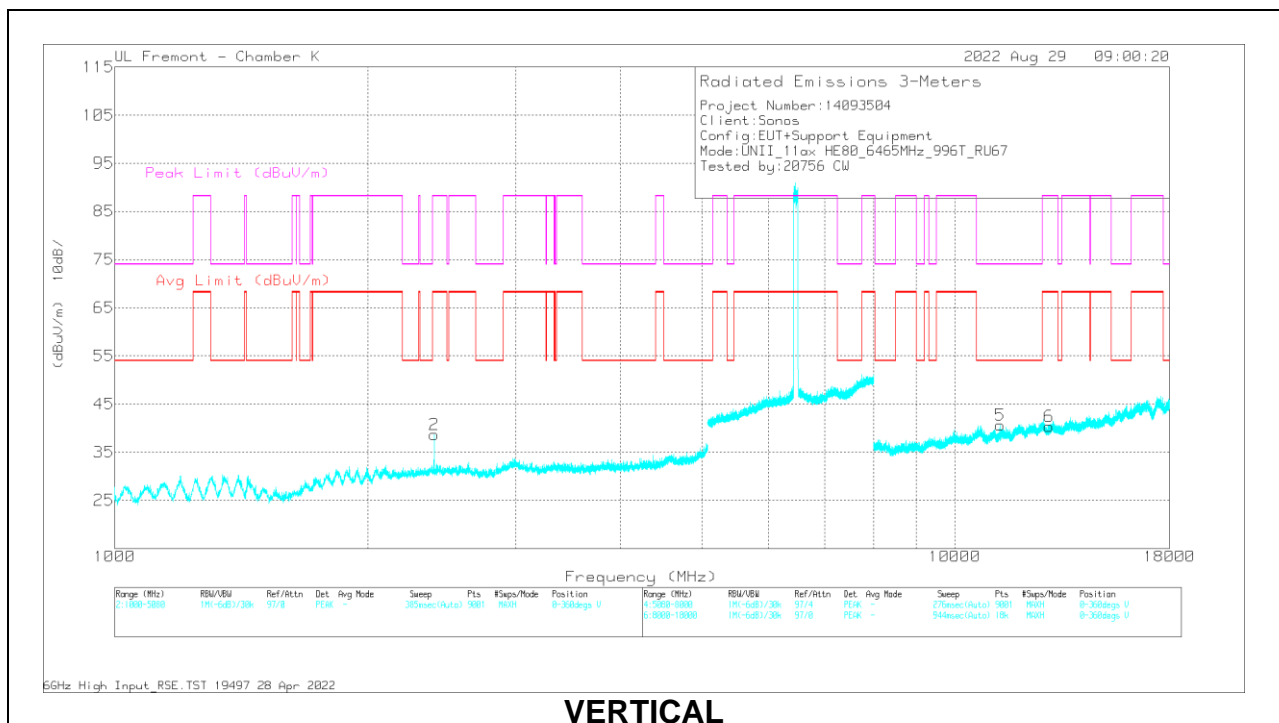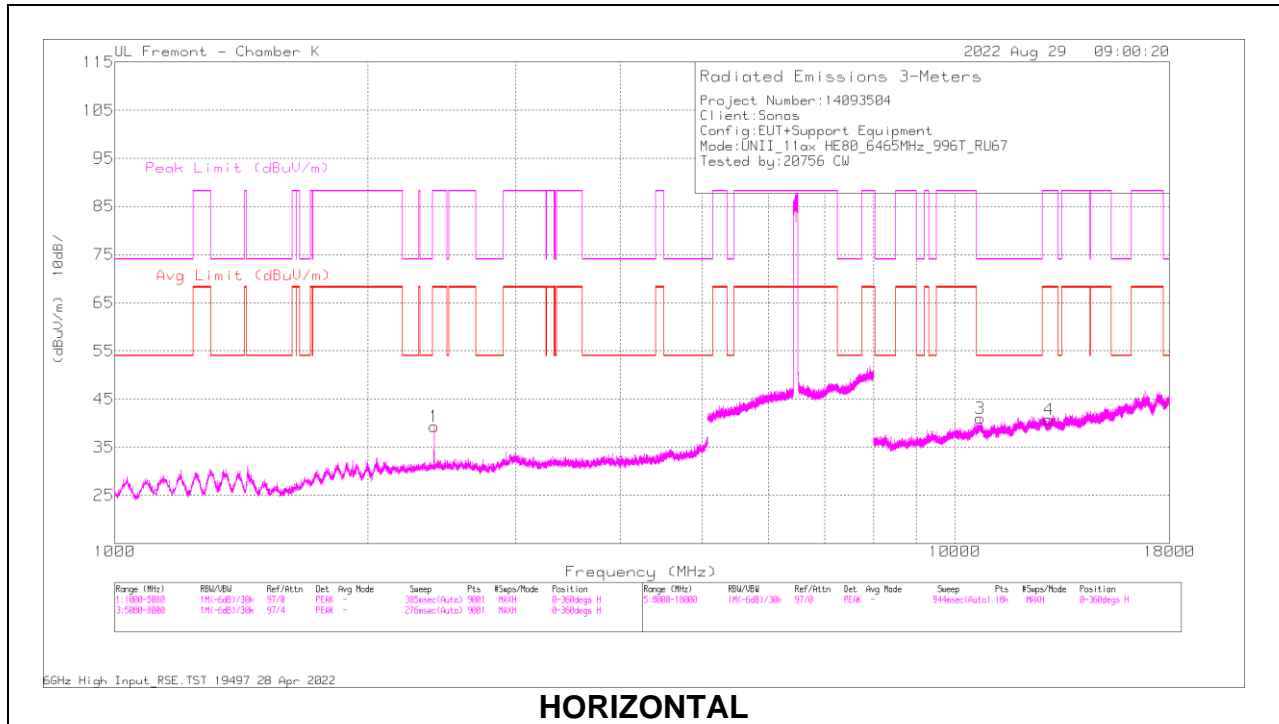

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.212	59.5	PK-U	32.5	-44.6	0	47.4	-	-	88.2	-40.8	288	173	H
	2400.004	52.01	ADR	32.5	-44.6	3.25	43.16	68.2	-25.04	-	-	288	173	H
2	2400.164	59.07	PK-U	32.5	-44.6	0	46.97	-	-	88.2	-41.23	12	128	V
	2399.976	51.3	ADR	32.5	-44.6	3.25	42.45	68.2	-25.75	-	-	12	128	V
3	* 10720.745	48.02	PK-U	37.9	-36.2	0	49.72	-	-	74	-24.28	186	261	H
	* 10720.574	36.08	ADR	37.9	-36.2	3.25	41.03	54	-12.97	-	-	186	261	H
4	12940.742	44.96	PK-U	39.1	-34.3	0	49.76	-	-	88.2	-38.44	213	265	H
	12940.745	33.36	ADR	39.1	-34.3	3.25	41.41	68.2	-26.79	-	-	213	265	H
5	* 11327.679	47.17	PK-U	38.1	-36.1	0	49.17	-	-	74	-24.83	134	290	V
	* 11327.431	35.03	ADR	38.1	-36.1	3.25	40.28	54	-13.72	-	-	134	290	V
6	12945.911	45.14	PK-U	39.1	-34.2	0	50.04	-	-	88.2	-38.16	305	256	V
	12945.848	33.36	ADR	39.1	-34.2	3.25	41.51	68.2	-26.69	-	-	305	256	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STRADDLE CHANNEL

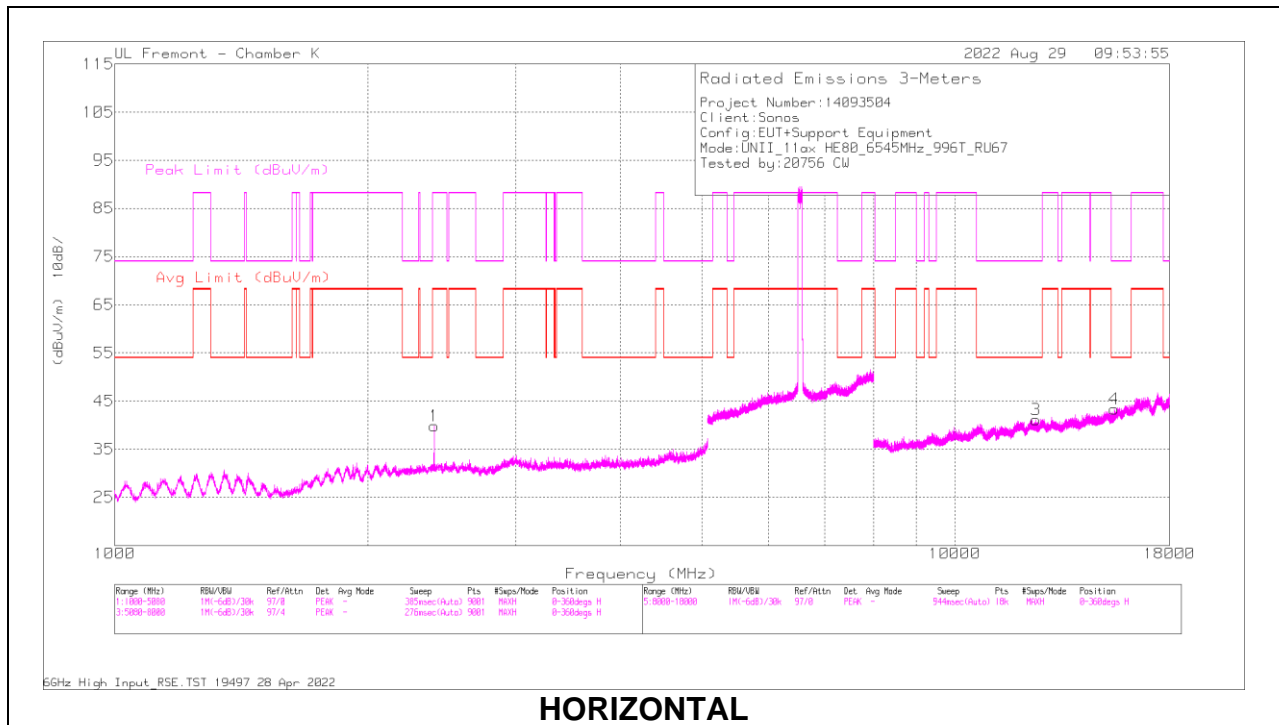

HORIZONTAL

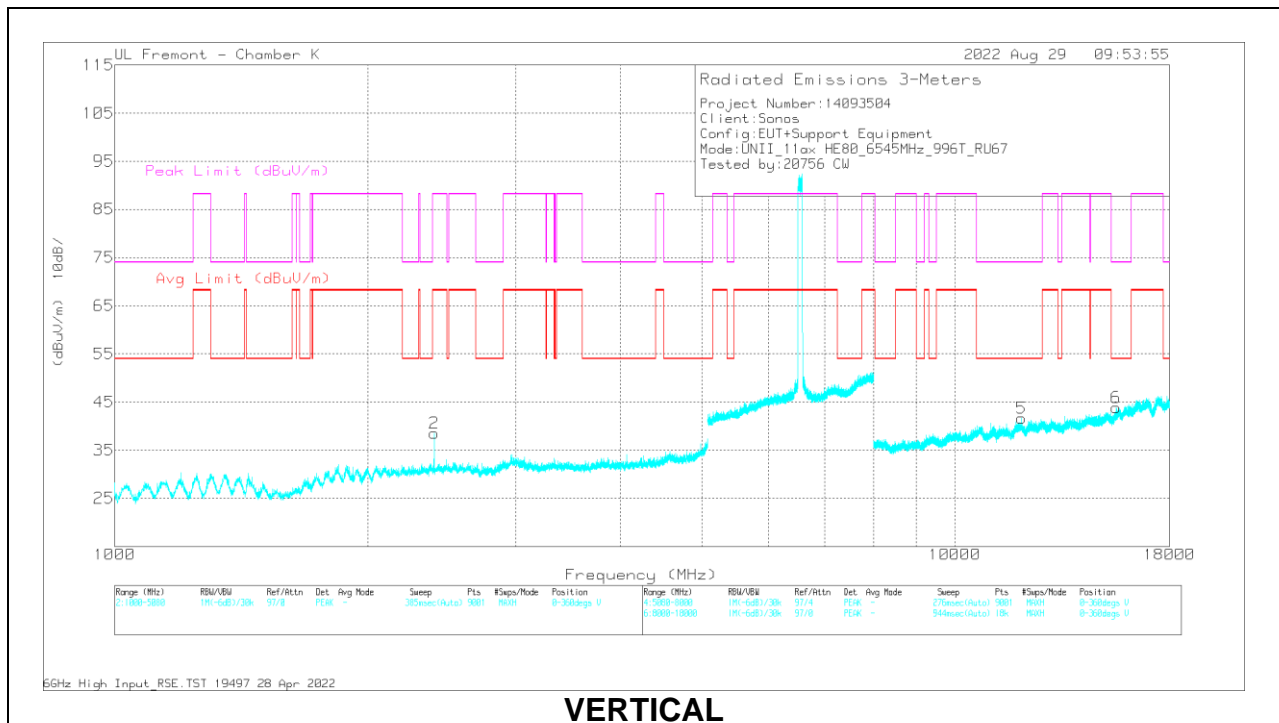

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.112	59.45	PK-U	32.5	-44.6	0	47.35	-	-	88.2	-40.85	284	146	H
	2400.088	52.08	ADR	32.5	-44.6	3.25	43.23	68.2	-24.97	-	-	284	146	H
2	2400.036	59.58	PK-U	32.5	-44.6	0	47.48	-	-	88.2	-40.72	13	299	V
	2400.084	51.91	ADR	32.5	-44.6	3.25	43.06	68.2	-25.14	-	-	13	299	V
3	* 12492.015	45.78	PK-U	39	-34.3	0	50.48	-	-	74	-23.52	123	234	H
	* 12491.132	33.3	ADR	39	-34.3	3.25	41.25	54	-12.75	-	-	123	234	H
4	* 15482.003	44.76	PK-U	40.4	-33.5	0	51.66	-	-	74	-22.34	246	201	H
	* 15481.697	32.93	ADR	40.4	-33.5	3.25	43.08	54	-10.92	-	-	246	201	H
5	* 11995.584	45.3	PK-U	38.7	-34.2	0	49.8	-	-	74	-24.2	145	368	V
	* 11996.966	33.57	ADR	38.7	-34.2	3.25	41.32	54	-12.68	-	-	145	368	V
6	* 15554.941	45.25	PK-U	40.4	-33.6	0	52.05	-	-	74	-21.95	158	151	V
	* 15555.087	33.3	ADR	40.4	-33.6	3.25	43.35	54	-10.65	-	-	158	151	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.7. TX ABOVE 1 GHz 802.11ax HE20 MODE IN THE UNII-7 BAND


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 0

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

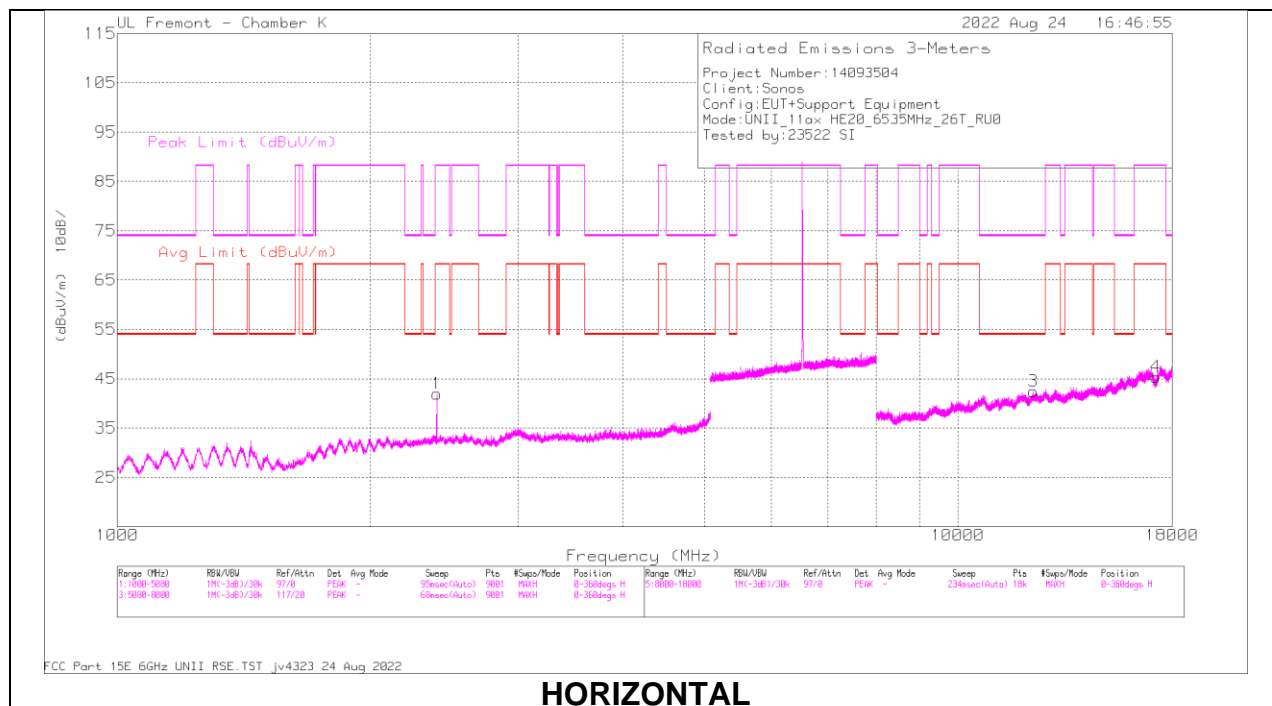

HORIZONTAL

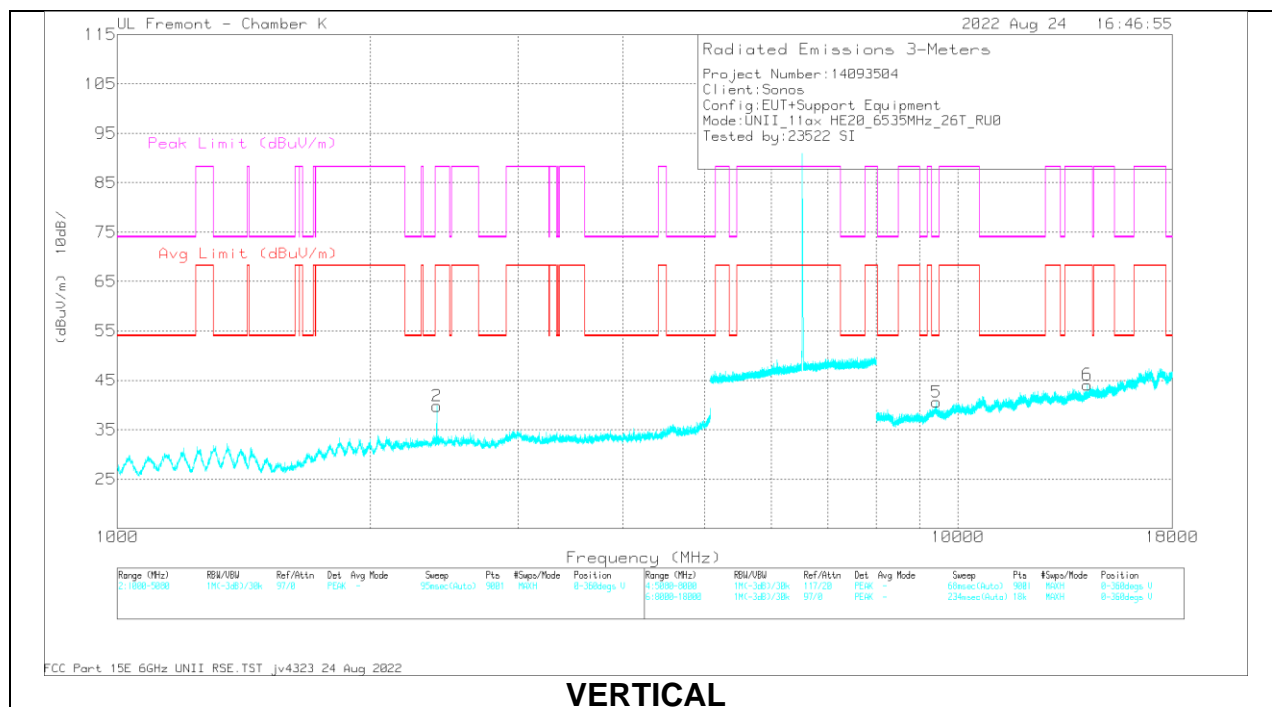

VERTICAL

RADIATED EMISSIONS

Markers	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Filtr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2399.852	63.7	PK-U	32.5	-44.6	0	51.6	-	-	88.2	-36.6	282	143	H
	2400.124	54.17	ADR	32.5	-44.6	1.96	44.03	68.2	-24.17	-	-	282	143	H
2	2400.248	62.5	PK-U	32.5	-44.6	0	50.4	-	-	88.2	-37.8	7	265	V
	2400.096	53.25	ADR	32.5	-44.6	1.96	43.11	68.2	-25.09	-	-	7	265	V
3	* 12305.331	47.78	PK-U	39	-34.7	0	52.08	-	-	74	-21.92	222	222	H
	* 12305.642	35.26	ADR	39	-34.7	1.96	41.52	54	-12.48	-	-	222	222	H
4	17214.286	45.11	PK-U	41.5	-31.9	0	54.71	-	-	88.2	-33.49	270	320	H
	17214.238	33.38	ADR	41.5	-31.9	1.96	44.94	68.2	-23.26	-	-	270	320	H
5	* 9431.492	49.5	PK-U	36.6	-36.5	0	49.6	-	-	74	-24.4	139	338	V
	* 9433.23	37.36	ADR	36.6	-36.5	1.96	39.42	54	-14.58	-	-	139	338	V
6	14266.67	48.33	PK-U	39.2	-35.1	0	52.43	-	-	88.2	-35.77	189	220	V
	14268.344	36.08	ADR	39.2	-35.1	1.96	42.14	68.2	-26.06	-	-	189	220	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 4

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL

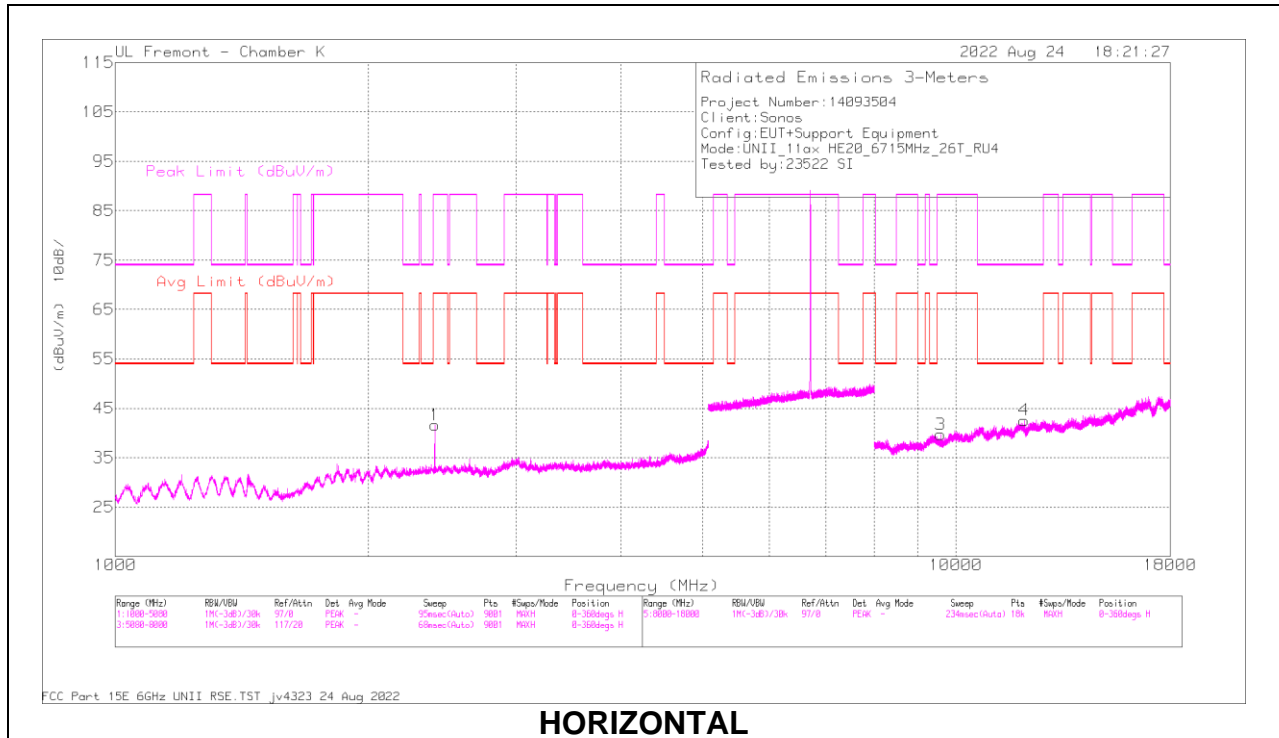

HORIZONTAL

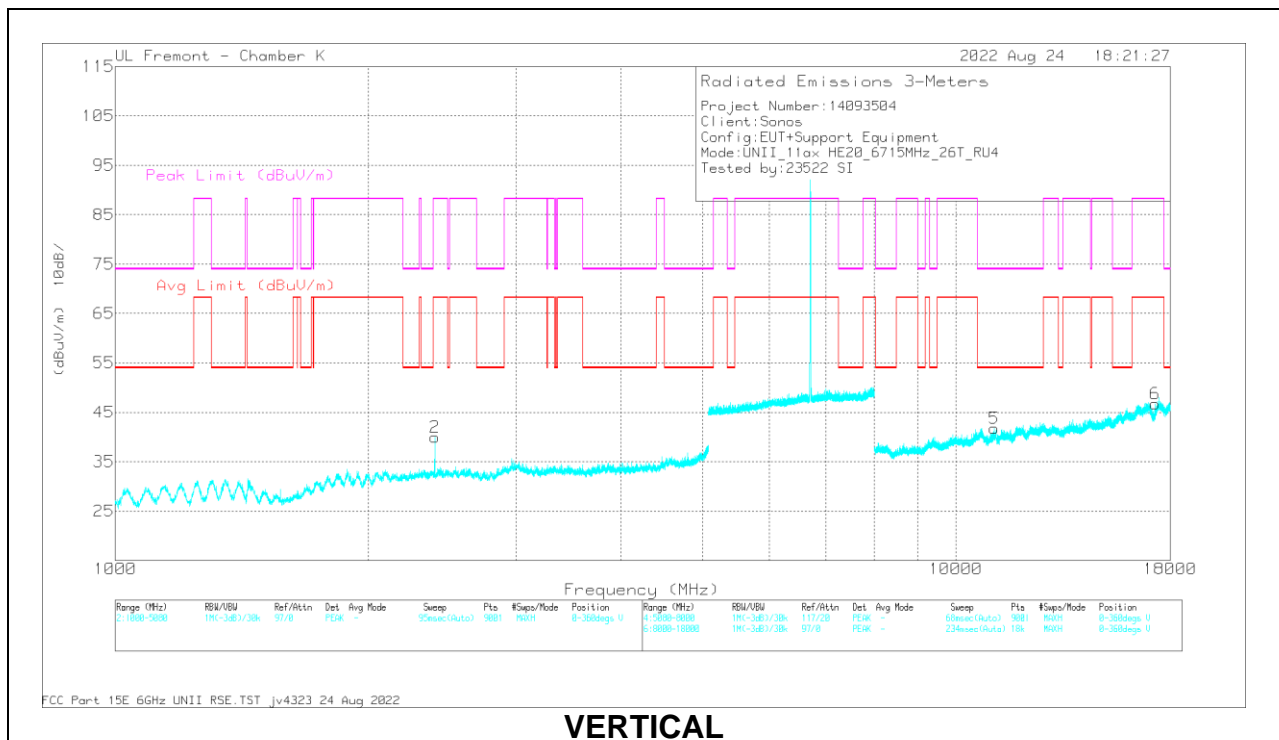

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.364	62.95	PK-U	32.5	-44.7	0	50.75	-	-	88.2	-37.45	284	144	H
	2400.076	54.09	ADR	32.5	-44.6	1.96	43.95	68.2	-24.25	-	-	284	144	H
2	2400.028	62.12	PK-U	32.5	-44.6	0	50.02	-	-	88.2	-38.18	9	265	V
	2400.048	53.23	ADR	32.5	-44.6	1.96	43.09	68.2	-25.11	-	-	9	265	V
3	9592.862	48.95	PK-U	36.8	-36.6	0	49.15	-	-	88.2	-39.05	36	281	H
	9594.868	36.34	ADR	36.8	-36.7	1.96	38.4	68.2	-29.8	-	-	36	281	H
4	* 12060.524	46.63	PK-U	38.8	-34	0	51.43	-	-	74	-22.57	133	220	H
	* 12060.848	34.42	ADR	38.8	-34	1.96	41.18	54	-12.82	-	-	133	220	H
5	* 11119.021	48.62	PK-U	37.9	-36.1	0	50.42	-	-	74	-23.58	54	294	V
	* 11117.918	36.9	ADR	37.9	-36.1	1.96	40.66	54	-13.34	-	-	54	294	V
6	17273.067	45.14	PK-U	41.5	-31.4	0	55.24	-	-	88.2	-32.96	84	374	V
	17273.623	33.57	ADR	41.5	-31.4	1.96	45.63	68.2	-22.57	-	-	84	374	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 8

HARMONICS AND SPURIOUS EMISSIONS

HIGH CHANNEL

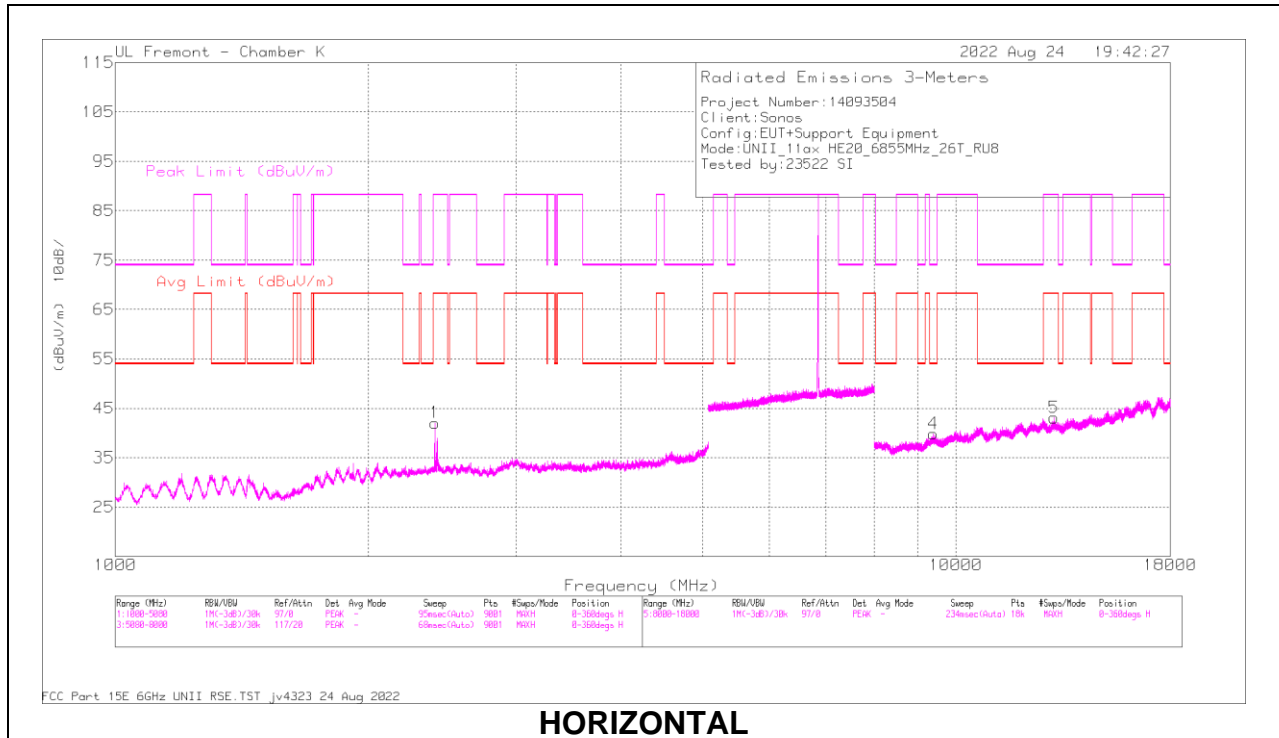

HORIZONTAL

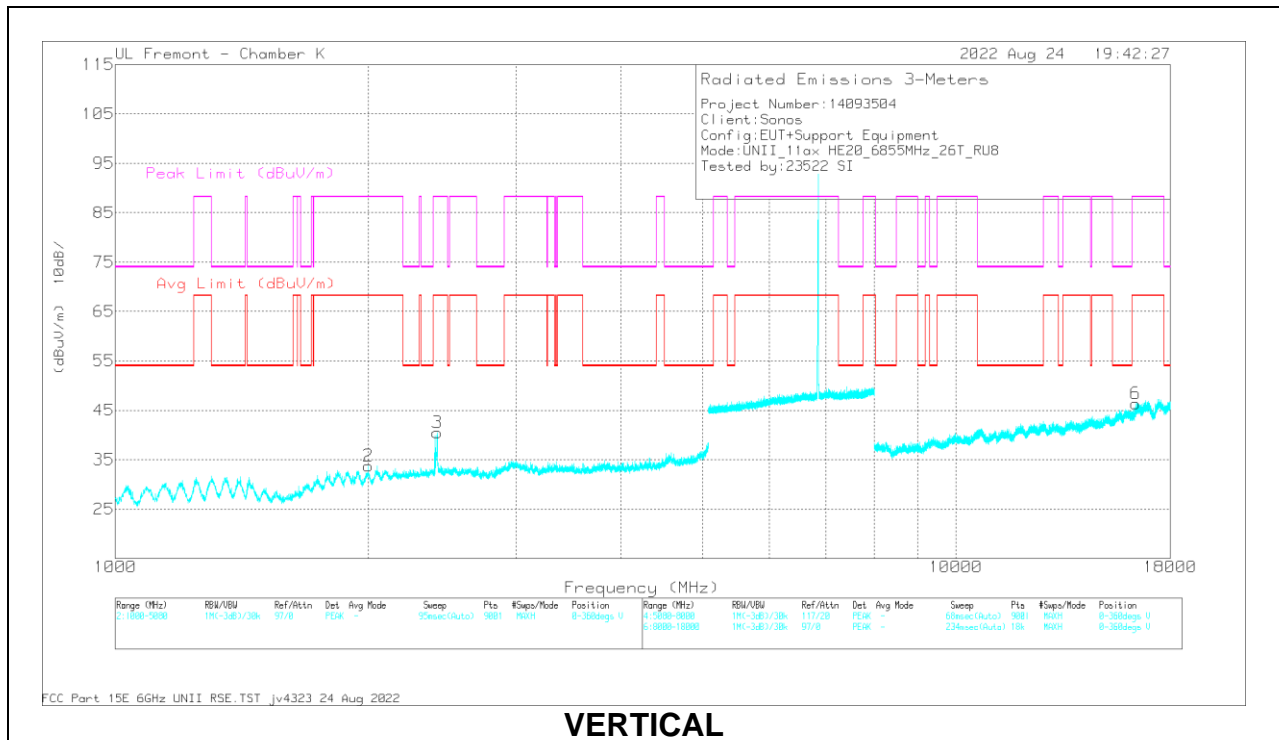

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.092	63.6	PK-U	32.5	-44.6	0	51.5	-	-	88.2	-36.7	284	142	H
	2399.996	54.13	ADR	32.5	-44.6	1.96	43.99	68.2	-24.21	-	-	284	142	H
2	1999.657	56.62	PK-U	31.4	-45.5	0	42.52	-	-	88.2	-45.68	227	237	V
	2000.38	45.78	ADR	31.4	-45.5	1.96	33.64	68.2	-34.56	-	-	227	237	V
3	2414.582	62.29	PK-U	32.5	-44.5	0	50.29	-	-	88.2	-37.91	205	205	V
	2415.741	43.91	ADR	32.5	-44.5	1.96	33.87	68.2	-34.33	-	-	205	205	V
4	* 9402.473	49.31	PK-U	36.6	-36.6	0	49.31	-	-	74	-24.69	228	225	H
	* 9401.785	37.42	ADR	36.6	-36.6	1.96	39.38	54	-14.62	-	-	228	225	H
5	13083.949	47.01	PK-U	39	-33.9	0	52.11	-	-	88.2	-36.09	305	249	H
	13086.111	35.32	ADR	39	-34	1.96	42.28	68.2	-25.92	-	-	305	249	H
6	16380.91	45.98	PK-U	41.4	-32.7	0	54.68	-	-	88.2	-33.52	130	285	V
	16382.908	34.21	ADR	41.4	-32.6	1.96	44.97	68.2	-23.23	-	-	130	285	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STRADDLE CHANNEL

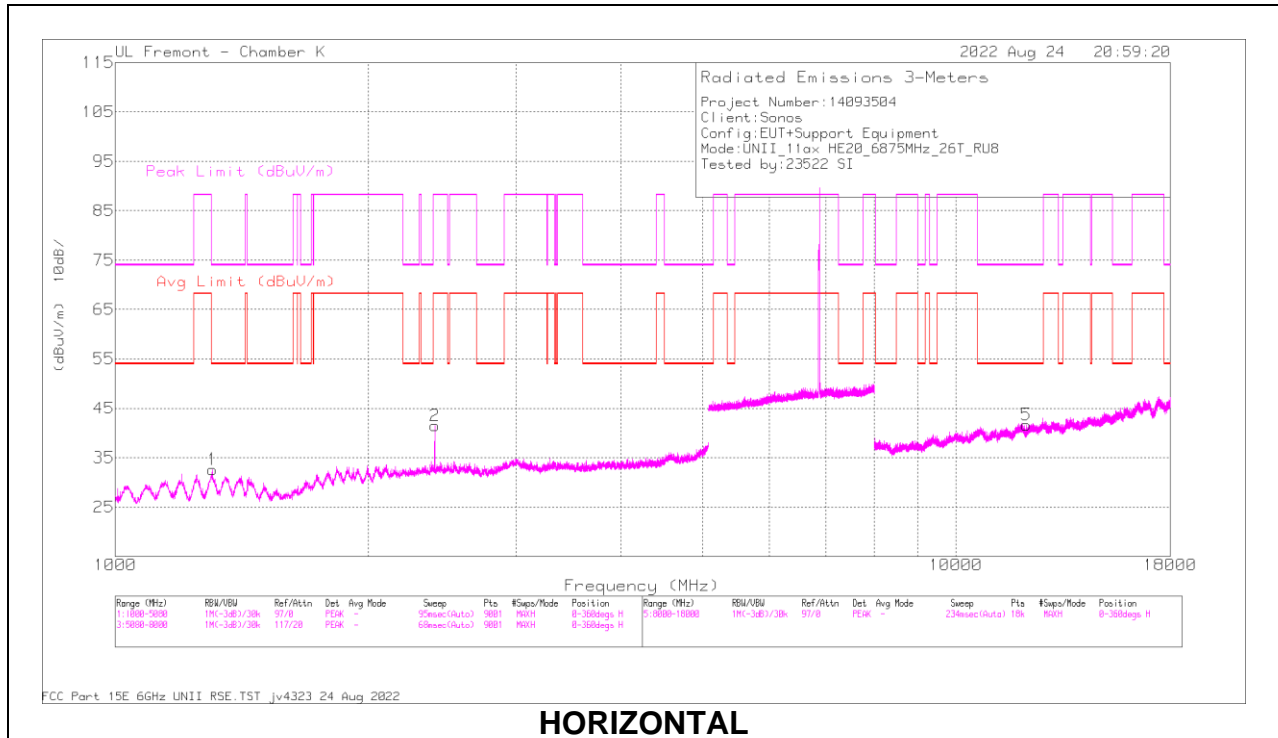

HORIZONTAL

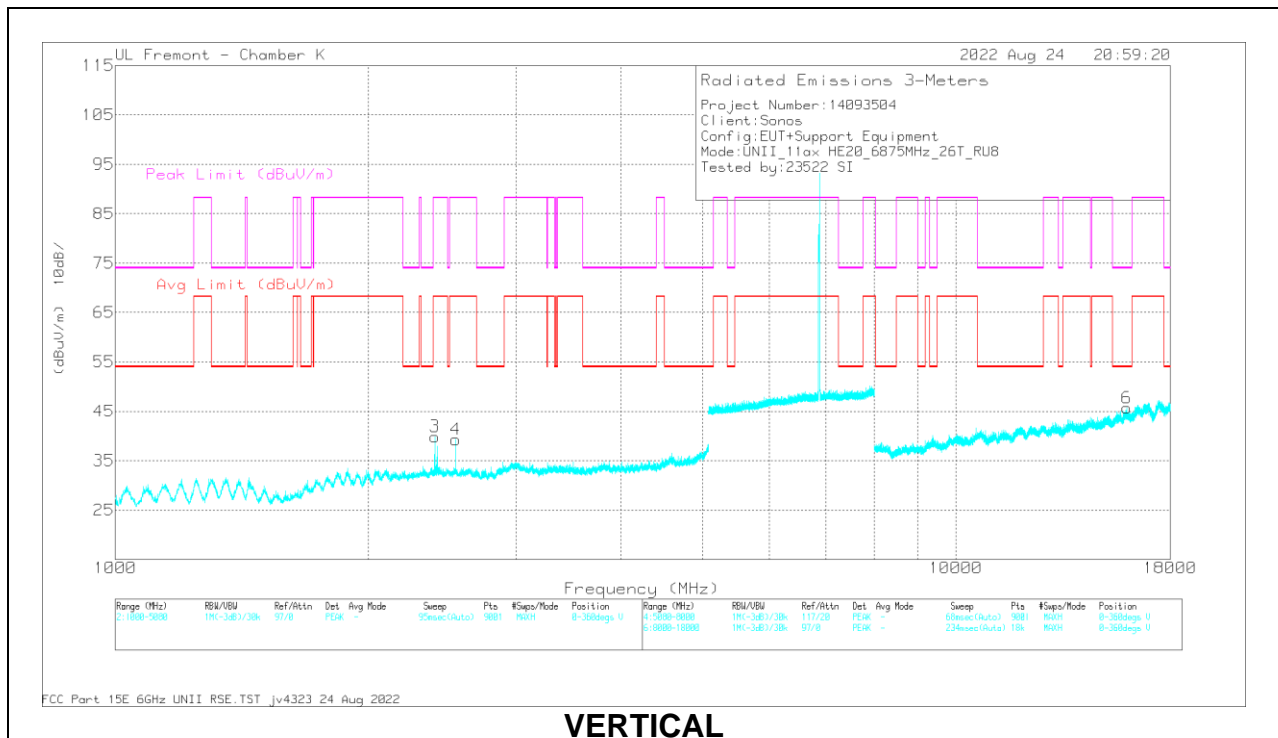

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1304.496	58.52	PK-U	29.4	-46.3	0	41.62	-	-	74	-32.38	228	295	H
	* 1303.321	46.73	ADR	29.4	-46.3	1.96	31.79	54	-22.21	-	-	228	295	H
2	2400.108	63.74	PK-U	32.5	-44.6	0	51.64	-	-	88.2	-36.56	284	146	H
	2400.06	54.25	ADR	32.5	-44.6	1.96	44.11	68.2	-24.09	-	-	284	146	H
3	2399.992	63.1	PK-U	32.5	-44.6	0	51	-	-	88.2	-37.2	4	265	V
	2400.004	53.27	ADR	32.5	-44.6	1.96	43.13	68.2	-25.07	-	-	4	265	V
4	2539.478	54.91	PK-U	32.5	-44.2	0	43.21	-	-	88.2	-44.99	13	197	V
	2540.285	43.11	ADR	32.5	-44.2	1.96	33.37	68.2	-34.83	-	-	13	197	V
5	* 12139.197	47.11	PK-U	38.9	-34.5	0	51.51	-	-	74	-22.49	357	315	H
	* 12140.895	34.7	ADR	38.9	-34.6	1.96	40.96	54	-13.04	-	-	357	315	H
6	* 15982.307	46.04	PK-U	41.1	-33.2	0	53.94	-	-	74	-20.06	201	246	V
	* 15981.244	34.19	ADR	41.1	-33.2	1.96	44.05	54	-9.95	-	-	201	246	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 242-Tones, RU Index 61

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

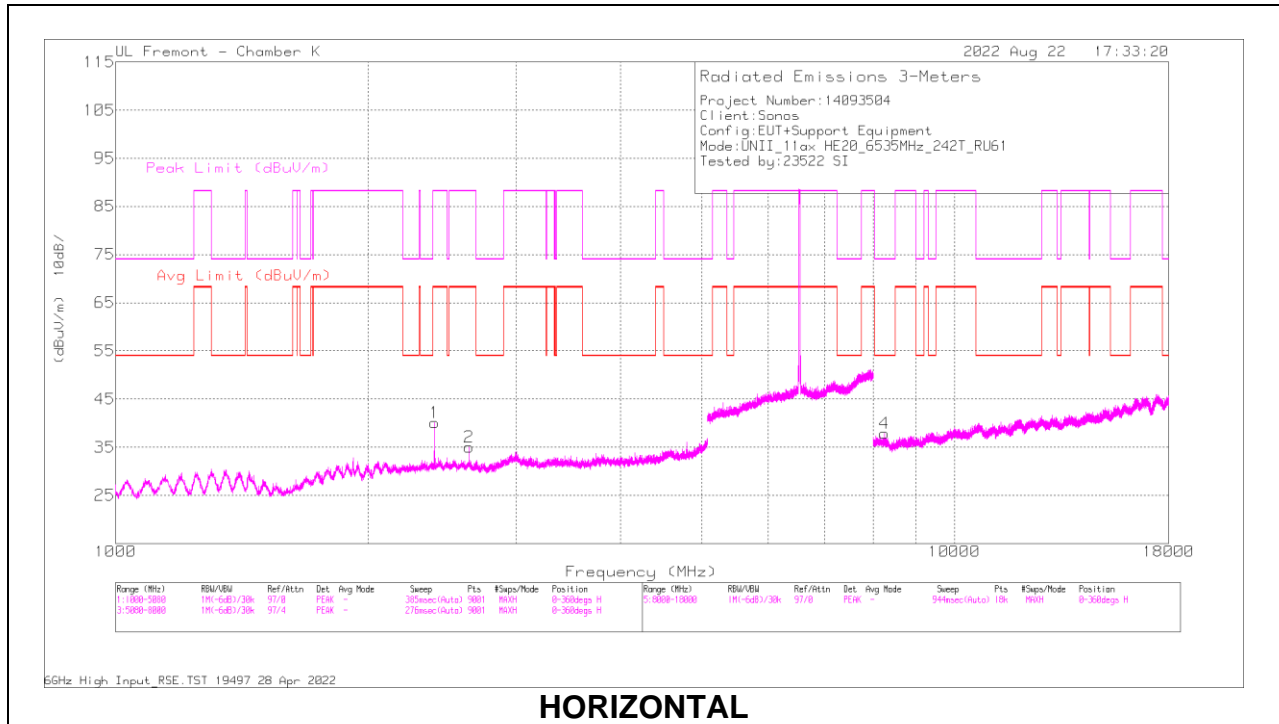

HORIZONTAL

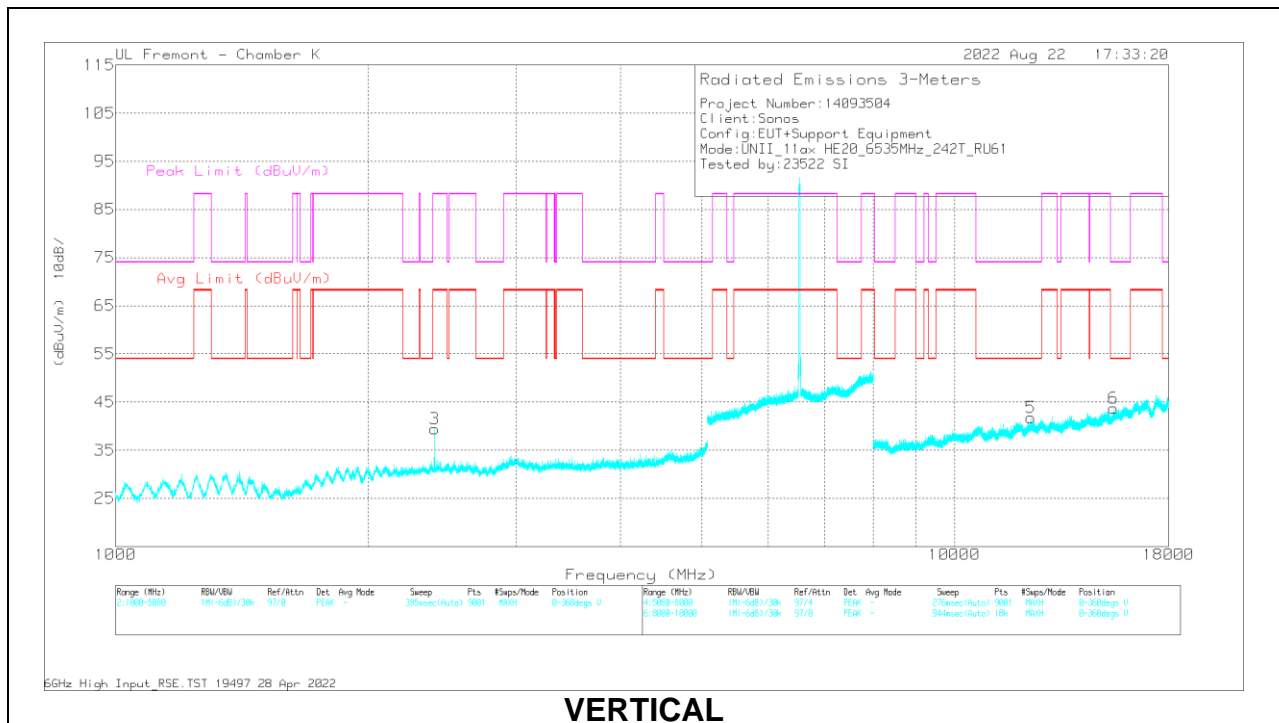

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2399.836	59.48	PK-U	32.5	-44.6	0	47.38	-	-	88.2	-40.82	269	220	H
	2400.024	51.89	ADR	32.5	-44.6	2.91	42.7	68.2	-25.5	-	-	269	220	H
2	2639.763	53.63	PK-U	32.1	-43.4	0	42.33	-	-	88.2	-45.87	111	314	H
	2639.987	43.09	ADR	32.1	-43.4	2.91	34.7	68.2	-33.5	-	-	111	314	H
3	2399.82	59.48	PK-U	32.5	-44.6	0	47.38	-	-	88.2	-40.82	360	133	V
	2399.992	51.39	ADR	32.5	-44.6	2.91	42.2	68.2	-26	-	-	360	133	V
4	* 8258.723	47.97	PK-U	35.7	-36.9	0	46.77	-	-	74	-27.23	196	297	H
	* 8260.561	35.89	ADR	35.7	-36.8	2.91	37.7	54	-16.3	-	-	196	297	H
5	* 12342.283	45.45	PK-U	38.9	-34.4	0	49.95	-	-	74	-24.05	304	374	V
	* 12341.664	33.96	ADR	38.9	-34.4	2.91	41.37	54	-12.63	-	-	304	374	V
6	* 15468.718	44.95	PK-U	40.3	-33.5	0	51.75	-	-	74	-22.25	226	283	V
	* 15471.787	33	ADR	40.3	-33.5	2.91	42.71	54	-11.29	-	-	226	283	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL

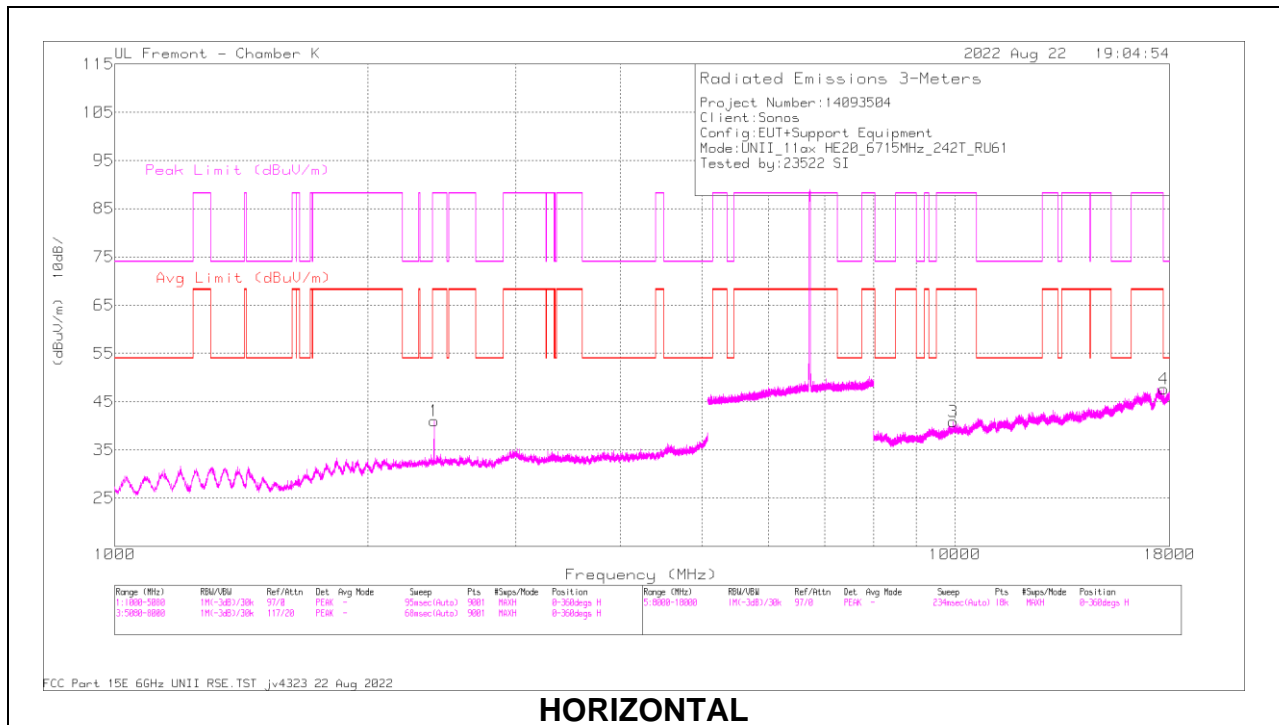

HORIZONTAL

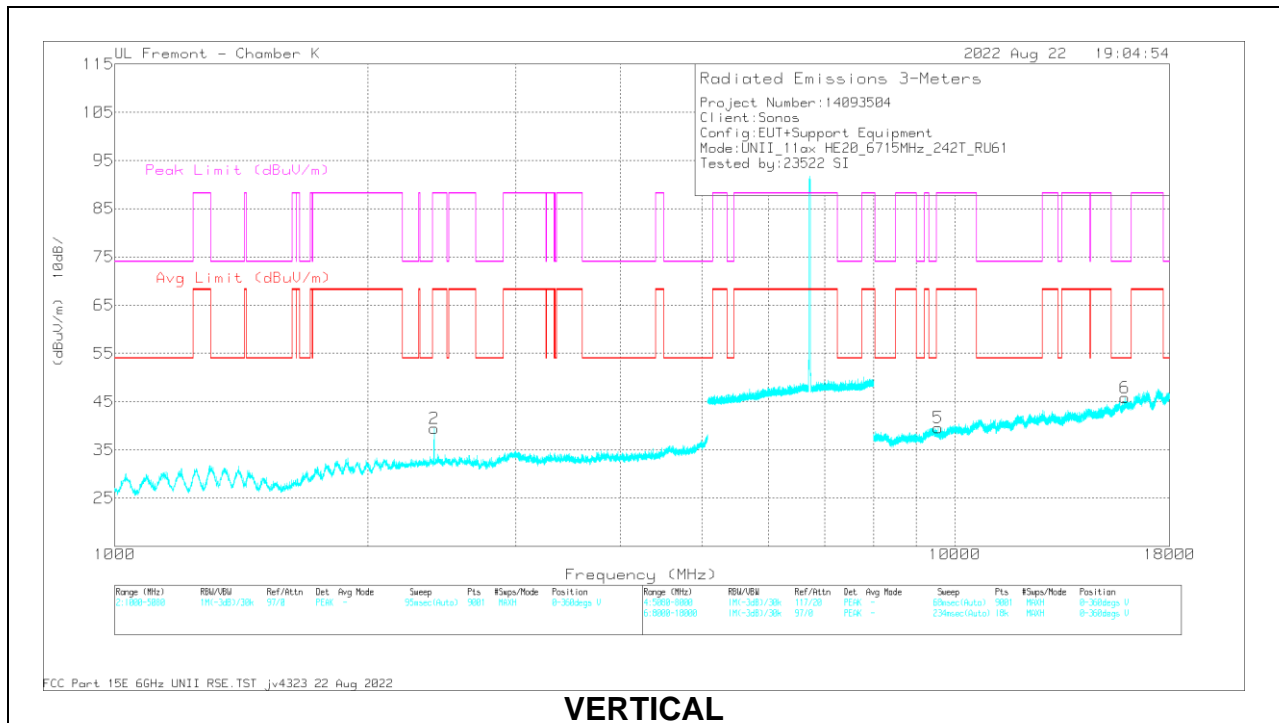

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2399.992	61.25	PK-U	32.5	-44.6	0	49.15	-	-	88.2	-39.05	23	206	H
	2399.952	52.26	ADR	32.5	-44.6	2.91	43.07	68.2	-25.13	-	-	23	206	H
2	2400.312	60.28	PK-U	32.5	-44.6	0	48.18	-	-	88.2	-40.02	169	101	V
	2399.992	50.73	ADR	32.5	-44.6	2.91	41.54	68.2	-26.66	-	-	169	101	V
3	9961.663	48.67	PK-U	37.4	-36.7	0	49.37	-	-	88.2	-38.83	286	134	H
	9961.471	36.81	ADR	37.4	-36.7	2.91	40.42	68.2	-27.78	-	-	286	134	H
4	* 17708.89	45.61	PK-U	41.6	-31.2	0	56.01	-	-	74	-17.99	168	245	H
	* 17707.112	33.69	ADR	41.6	-31.2	2.91	47	54	-7	-	-	168	245	H
5	9557.037	48.61	PK-U	36.7	-36.7	0	48.61	-	-	88.2	-39.59	300	368	V
	9557.584	36.46	ADR	36.7	-36.7	2.91	39.37	68.2	-28.83	-	-	300	368	V
6	* 15945.242	46.72	PK-U	41	-33.2	0	54.52	-	-	74	-19.48	282	99	V
	* 15944.463	34.3	ADR	41	-33.2	2.91	45.01	54	-8.99	-	-	282	99	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL

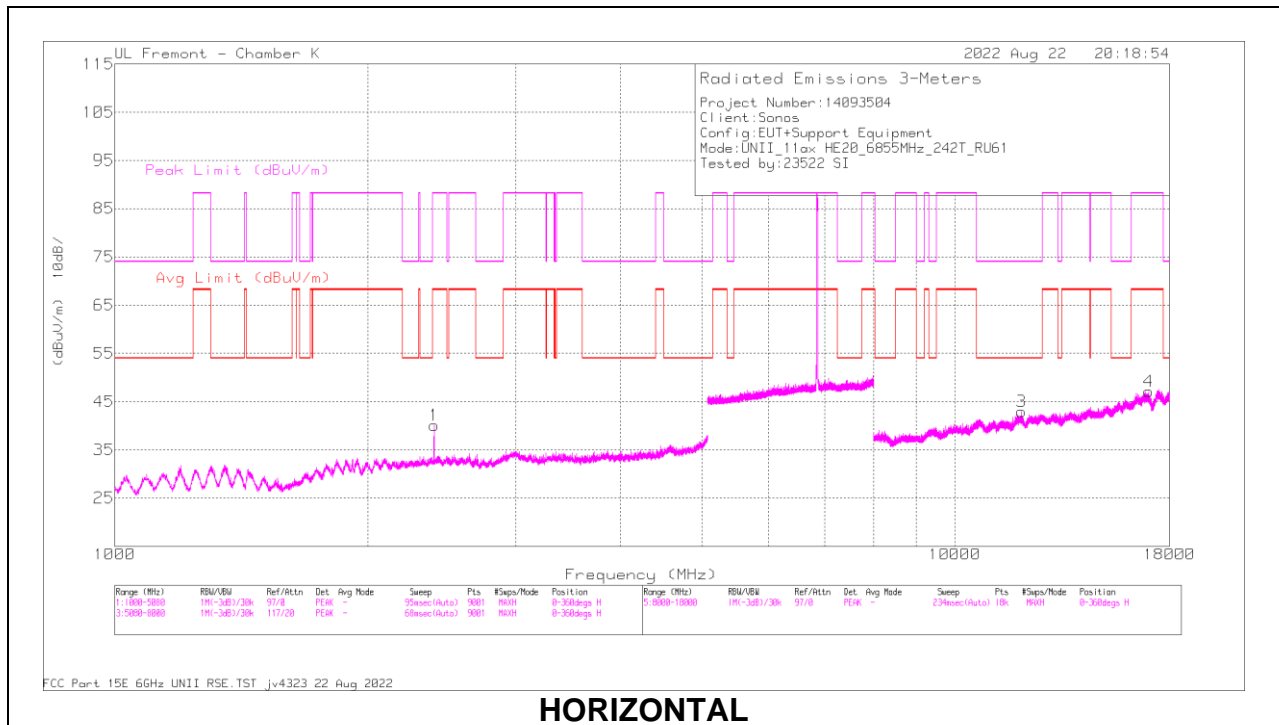

HORIZONTAL

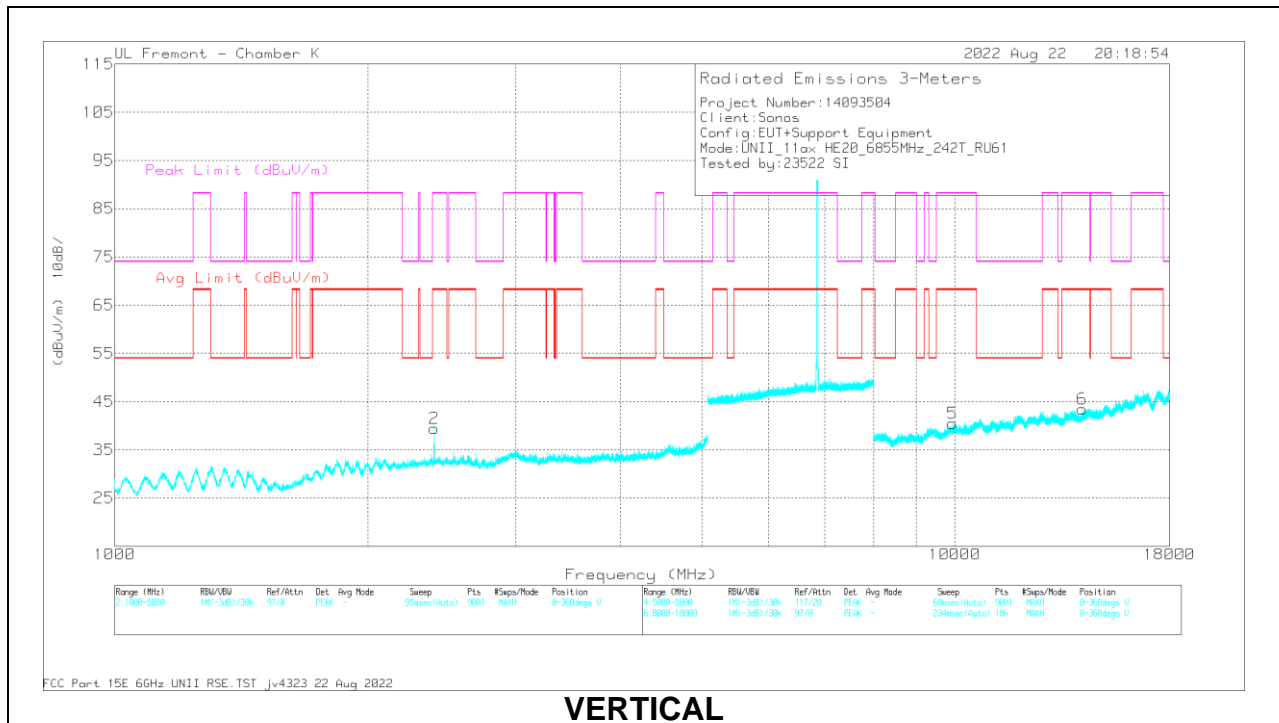

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2399.832	63.14	PK-U	32.5	-44.6	0	51.04	-	-	88.2	-37.16	87	218	H
	2400.068	53.62	ADR	32.5	-44.6	2.91	44.43	68.2	-23.77	-	-	87	218	H
2	2400.308	59.95	PK-U	32.5	-44.6	0	47.85	-	-	88.2	-40.35	165	105	V
	2400.012	50.73	ADR	32.5	-44.6	2.91	41.54	68.2	-26.66	-	-	165	105	V
3	* 11998.697	46.8	PK-U	38.7	-34.1	0	51.4	-	-	74	-22.6	288	391	H
	* 12000.028	35.06	ADR	38.7	-34.2	2.91	42.47	54	-11.53	-	-	288	391	H
4	17004.237	46.46	PK-U	42	-32.1	0	56.36	-	-	88.2	-31.84	248	304	H
	17005.38	34.28	ADR	42	-32.1	2.91	47.09	68.2	-21.11	-	-	248	304	H
5	9932.448	48.86	PK-U	37.3	-36.6	0	49.56	-	-	88.2	-38.64	251	351	V
	9931.097	36.82	ADR	37.3	-36.6	2.91	40.43	68.2	-27.77	-	-	251	351	V
6	14169.649	47.37	PK-U	39	-34.5	0	51.87	-	-	88.2	-36.33	57	228	V
	14171.863	35.65	ADR	39	-34.5	2.91	43.06	68.2	-25.14	-	-	57	228	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STRADDLE CHANNEL

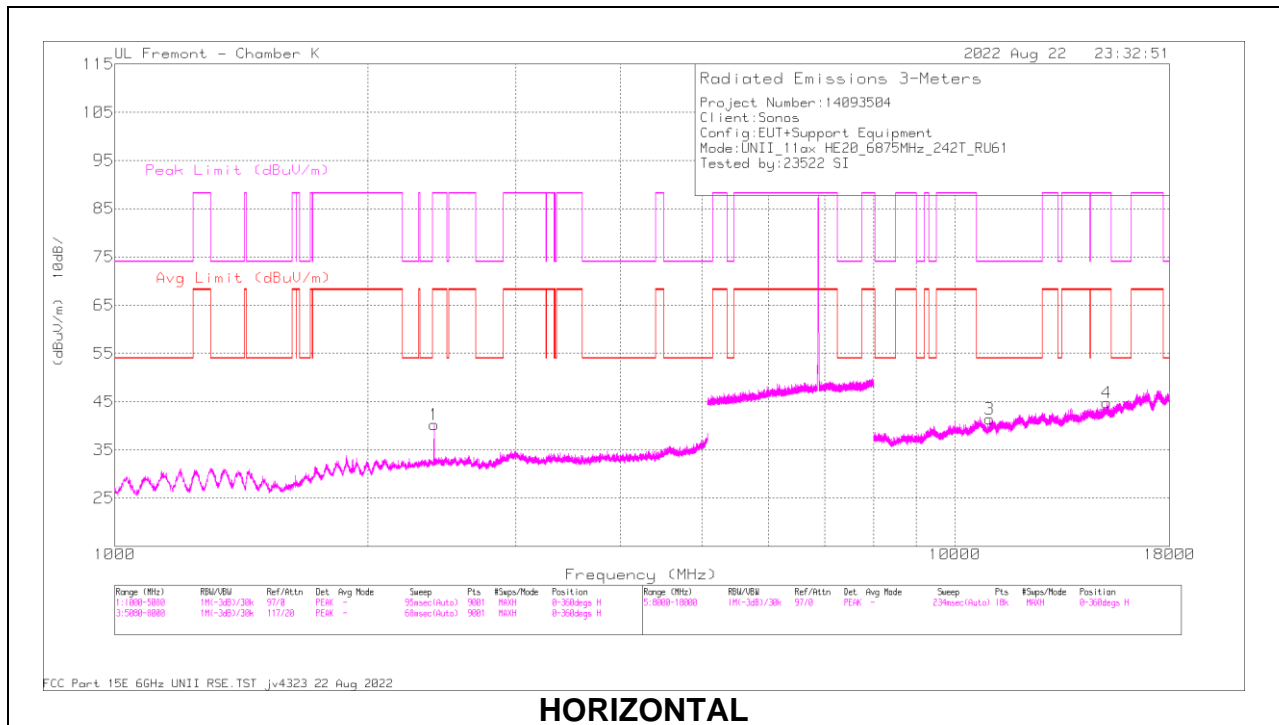

HORIZONTAL

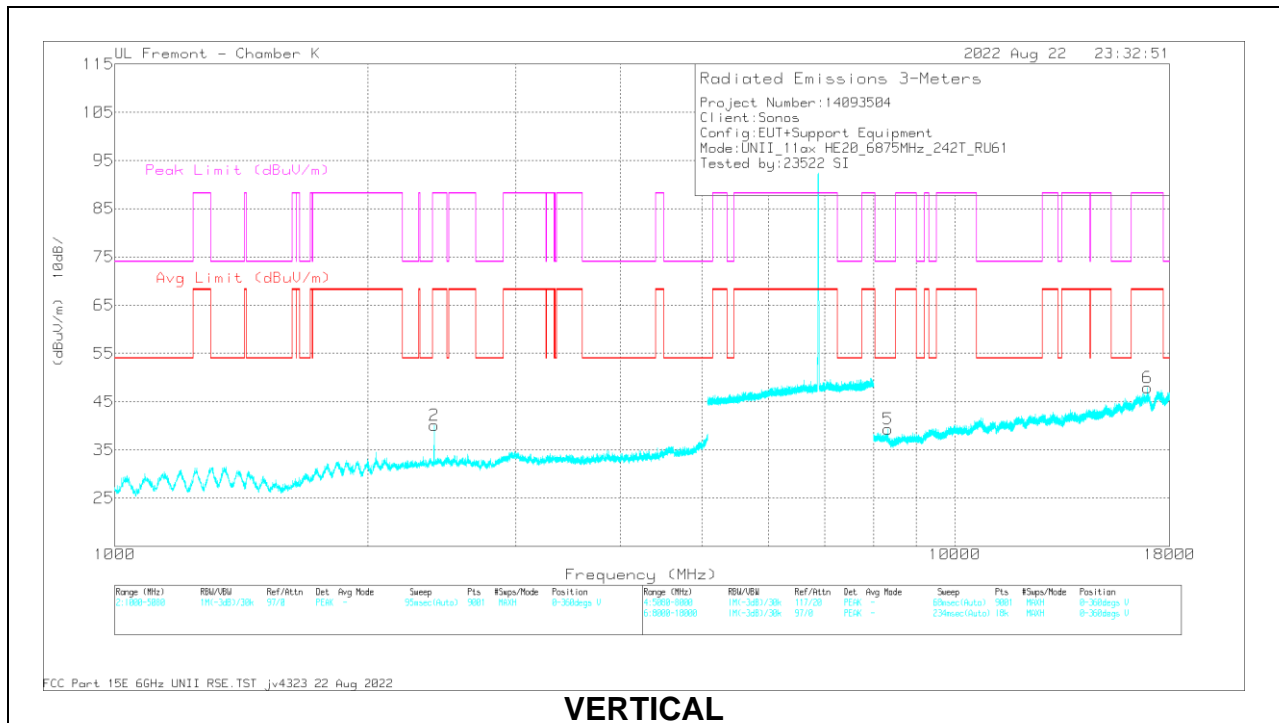

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.236	61.71	PK-U	32.5	-44.6	0	49.61	-	-	88.2	-38.59	344	223	H
	2400.024	52.63	ADR	32.5	-44.6	2.91	43.44	68.2	-24.76	-	-	344	223	H
2	2400.46	61.33	PK-U	32.5	-44.7	0	49.13	-	-	88.2	-39.07	3	305	V
	2400.048	52.16	ADR	32.5	-44.6	2.91	42.97	68.2	-25.23	-	-	3	305	V
3	* 11002.977	48.15	PK-U	37.9	-36.5	0	49.55	-	-	74	-24.45	284	180	H
	* 11004.463	36.54	ADR	37.9	-36.5	2.91	40.85	54	-13.15	-	-	284	180	H
4	15147.397	47.07	PK-U	39.9	-34	0	52.97	-	-	88.2	35.23	144	322	H
	15148.064	35.61	ADR	39.9	-34	2.91	44.42	68.2	-23.78	-	-	144	322	H
5	* 8326.261	48.79	PK-U	35.7	-37.2	0	47.29	-	-	74	-26.71	275	220	V
	* 8327.024	37.08	ADR	35.7	-37.2	2.91	38.49	54	-15.51	-	-	275	220	V
6	16942.997	46.63	PK-U	42.1	-32.4	0	56.33	-	-	88.2	-31.87	25	177	V
	16942.834	34.52	ADR	42.1	-32.4	2.91	47.13	68.2	-21.07	-	-	25	177	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.8. TX ABOVE 1 GHz 802.11ax HE40 MODE IN THE UNII-7 BAND


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 0

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

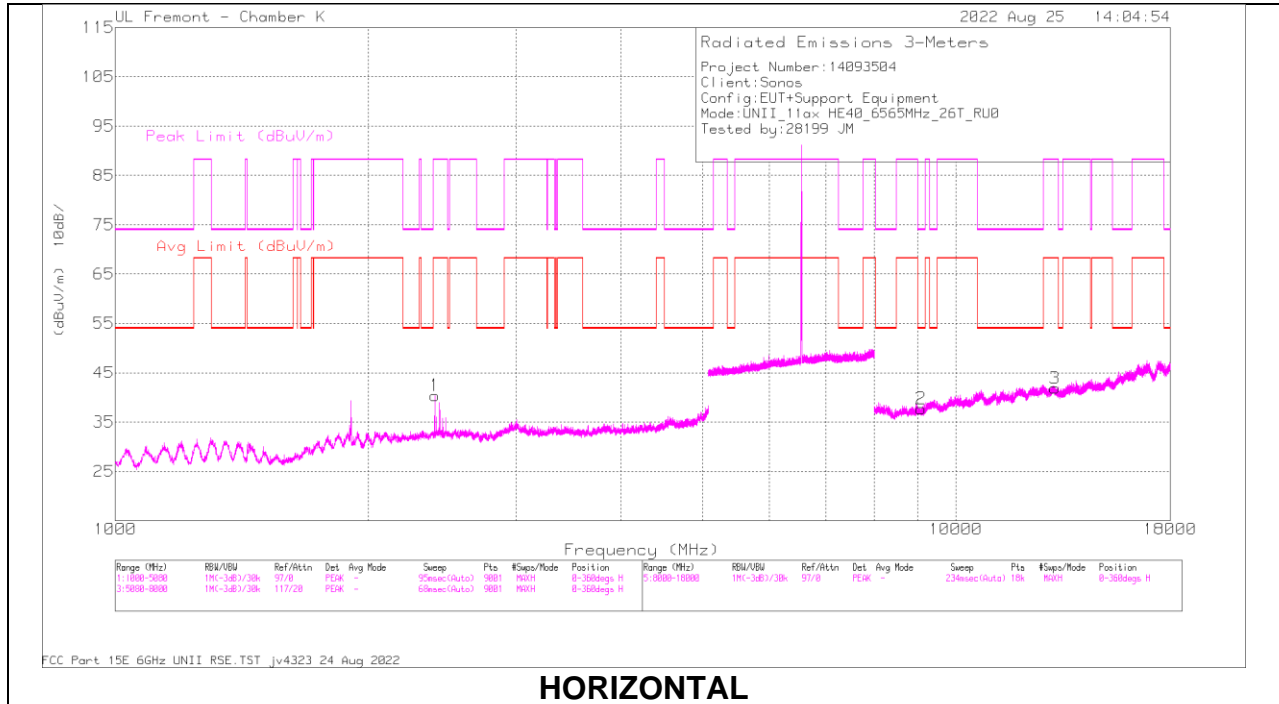

HORIZONTAL

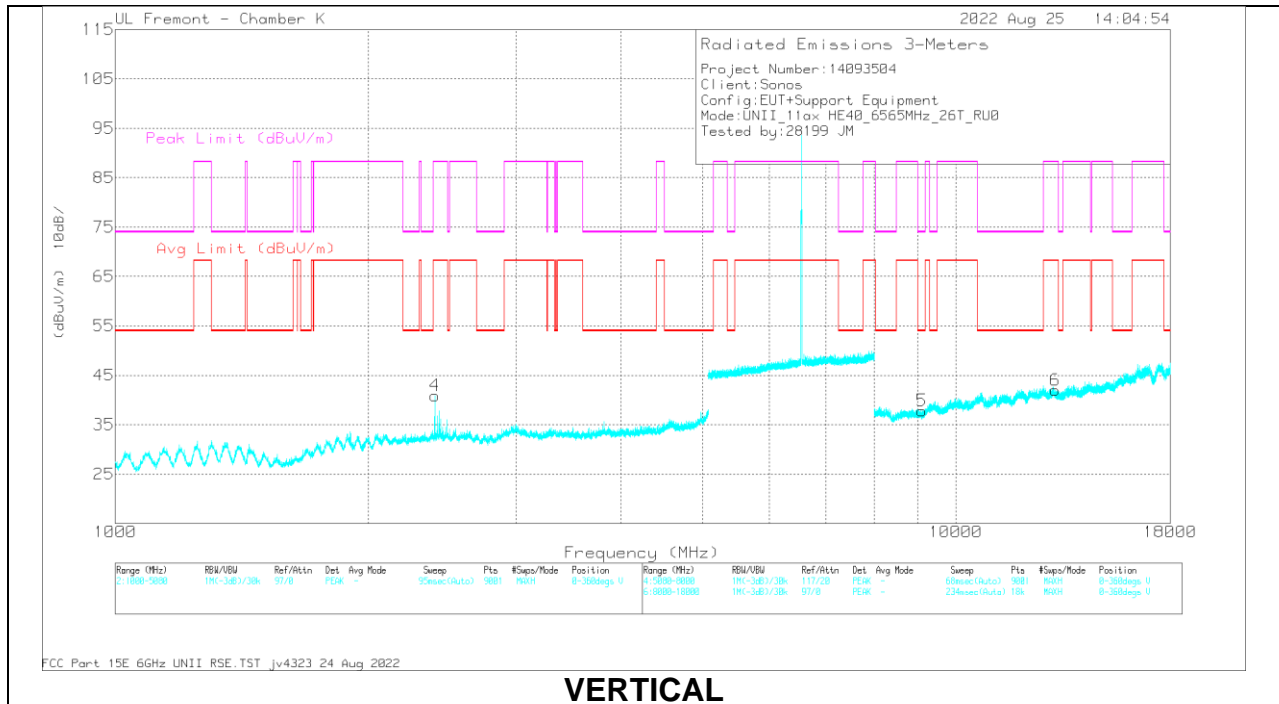

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.273	62.44	PK-U	32.5	-44.6	0	50.34	-	-	88.2	-37.86	88	313	H
	2400.103	52.77	ADR	32.5	-44.6	1.96	42.63	68.2	-25.57	-	-	88	313	H
2	* 9093.655	48.7	PK-U	36.3	-36.7	0	48.3	-	-	74	-25.7	68	167	H
	* 9094.473	36.26	ADR	36.3	-36.7	1.96	37.82	54	-16.18	-	-	68	167	H
3	13122.367	47.41	PK-U	39	-34.4	0	52.01	-	-	88.2	-36.19	214	366	H
	13122.599	35.54	ADR	39	-34.4	1.96	42.1	68.2	-26.1	-	-	214	366	H
4	2399.923	62.47	PK-U	32.5	-44.6	0	50.37	-	-	88.2	-37.83	6	237	V
	2400.039	53.44	ADR	32.5	-44.6	1.96	43.3	68.2	-24.9	-	-	6	237	V
5	* 9113.876	48.68	PK-U	36.3	-36.7	0	48.28	-	-	74	-25.72	296	364	V
	* 9113.166	36.39	ADR	36.3	-36.8	1.96	37.85	54	-16.15	-	-	296	364	V
6	13130.727	48.36	PK-U	39	-34.4	0	52.96	-	-	88.2	-35.24	209	374	V
	13132.828	35.58	ADR	39	-34.4	1.96	42.14	68.2	-26.06	-	-	209	374	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 8

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL

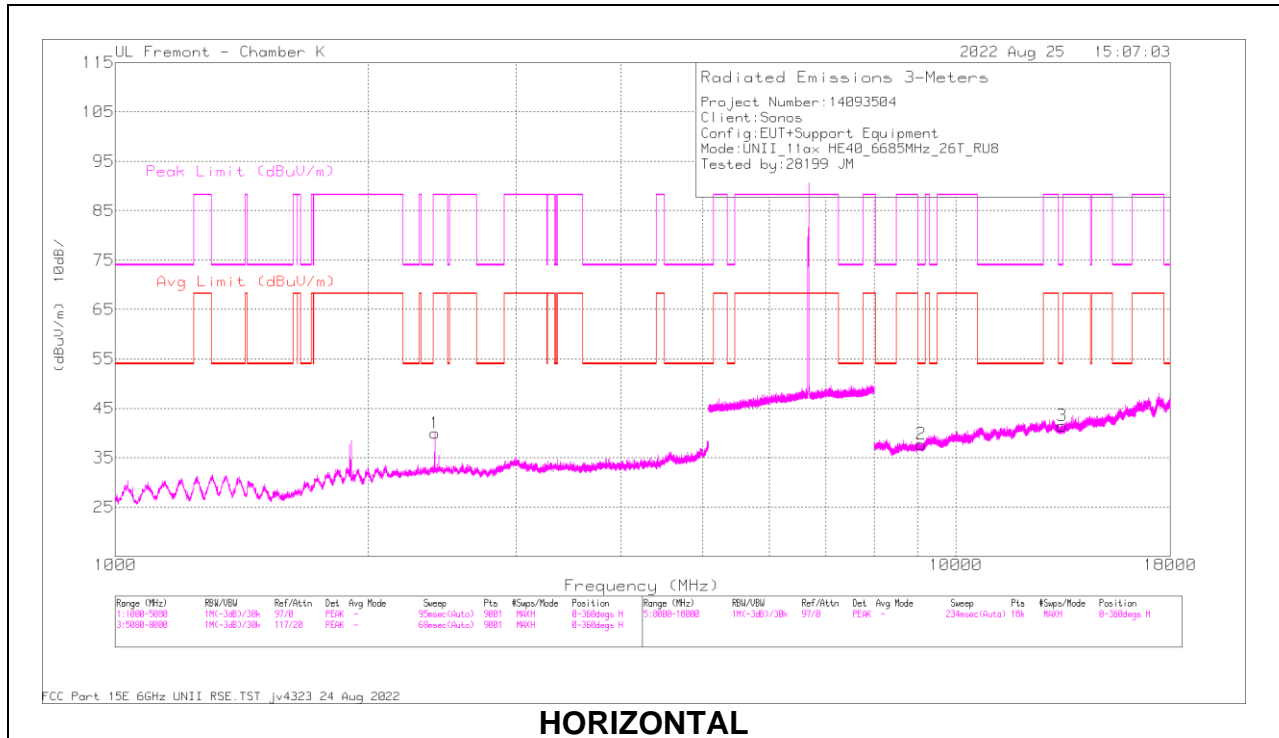

HORIZONTAL

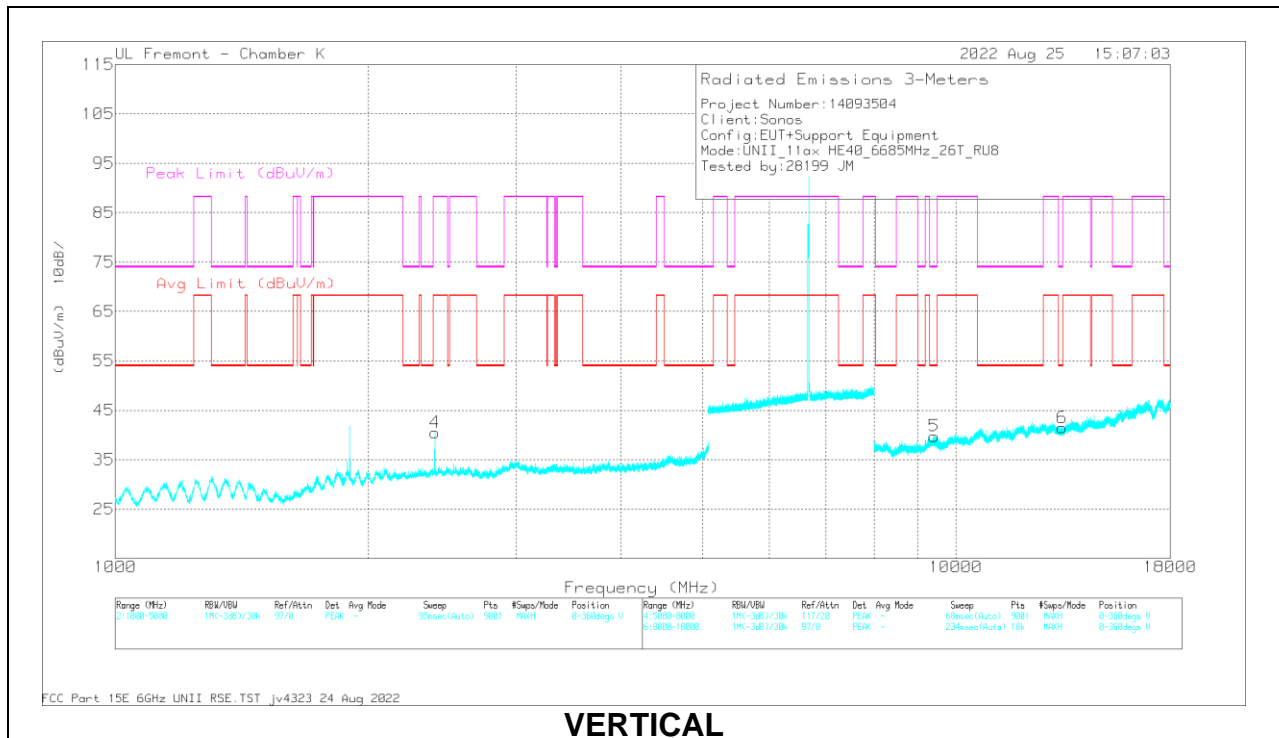

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.047	63.55	PK-U	32.5	-44.6	0	51.45	-	-	88.2	-36.75	93	310	H
	2400.067	54.65	ADR	32.5	-44.6	1.96	44.51	68.2	-23.69	-	-	93	310	H
2	* 9104.575	48.55	PK-U	36.3	-36.7	0	48.15	-	-	74	-25.85	53	237	H
	* 9104.396	36.19	ADR	36.3	-36.8	1.96	37.65	54	-16.35	-	-	53	237	H
3	* 13377.646	46.79	PK-U	39.1	-34.8	0	51.09	-	-	74	-22.91	45	390	H
	* 13376.982	34.86	ADR	39.1	-34.8	1.96	41.12	54	-12.88	-	-	45	390	H
4	2400.016	62.75	PK-U	32.5	-44.6	0	50.65	-	-	88.2	-37.55	2	236	V
	2400.116	53.19	ADR	32.5	-44.6	1.96	43.05	68.2	-25.15	-	-	2	236	V
5	* 9428.051	48.34	PK-U	36.6	-36.6	0	48.34	-	-	74	-25.66	223	174	V
	* 9426.361	36.83	ADR	36.6	-36.6	1.96	38.79	54	-15.21	-	-	223	174	V
6	* 13380.903	46.58	PK-U	39.1	-34.7	0	50.98	-	-	74	-23.02	297	346	V
	* 13382.661	34.69	ADR	39.1	-34.8	1.96	40.95	54	-13.05	-	-	297	346	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 17

HARMONICS AND SPURIOUS EMISSIONS

HIGH CHANNEL

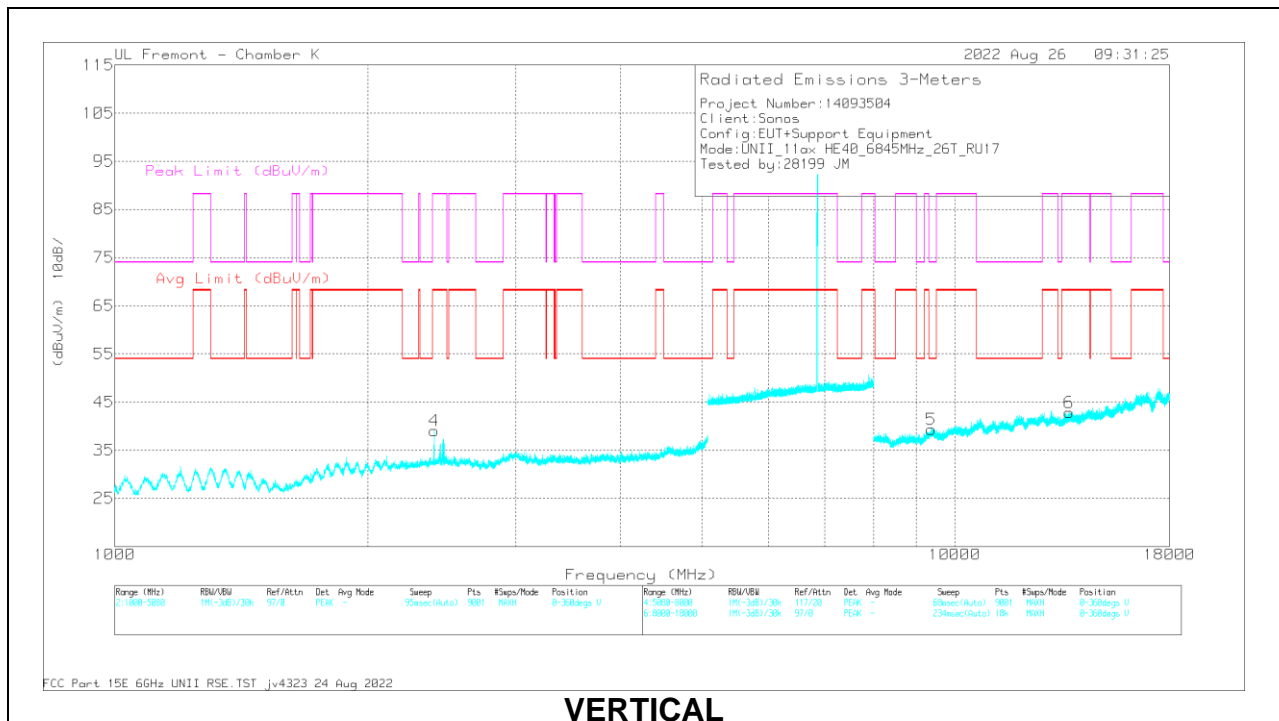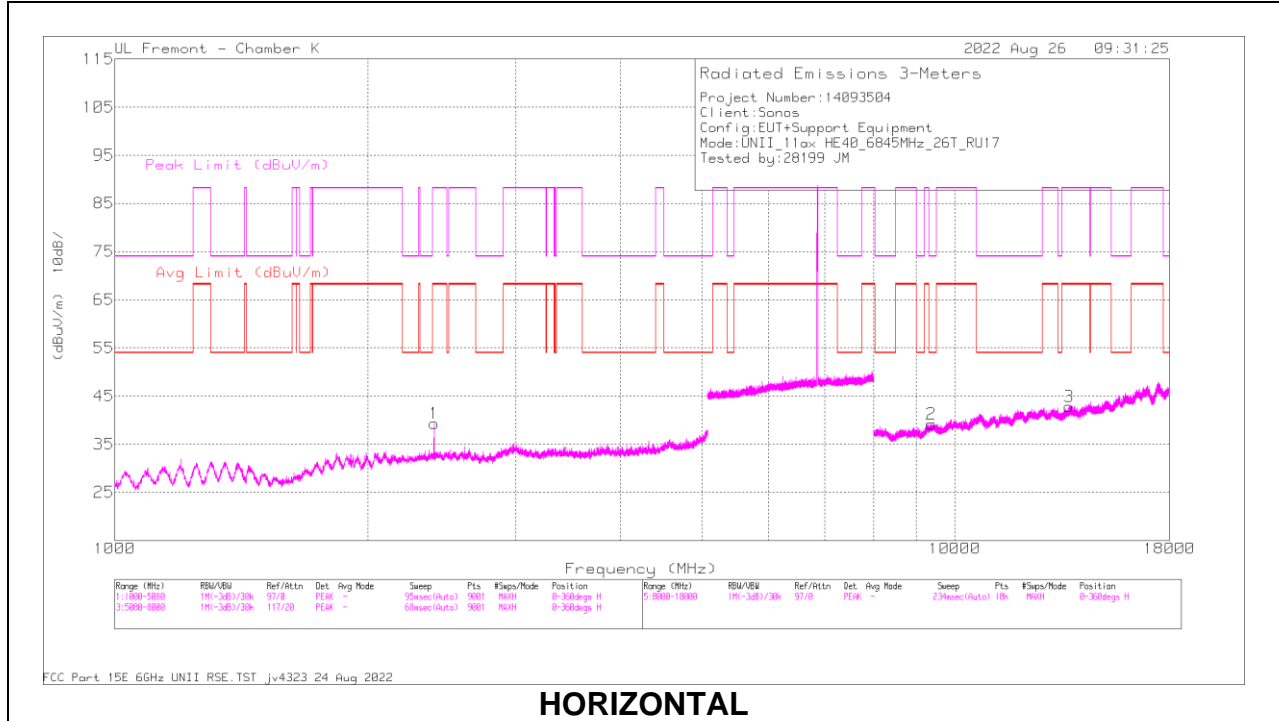

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.422	61.75	PK-U	32.5	-44.7	0	49.55	-	-	88.2	-38.65	256	308	H
	2400.067	52.25	ADR	32.5	-44.6	1.96	42.11	68.2	-26.09	-	-	256	308	H
2	* 9376.887	48.68	PK-U	36.5	-36.7	0	48.48	-	-	74	-25.52	102	181	H
	* 9377.27	37.05	ADR	36.5	-36.7	1.96	38.81	54	-15.19	-	-	102	181	H
3	13679.9	47.27	PK-U	38.8	-34.5	0	51.57	-	-	88.2	-36.63	91	329	H
	13679.552	35.56	ADR	38.8	-34.5	1.96	41.82	68.2	-26.38	-	-	91	329	H
4	2400.292	59.76	PK-U	32.5	-44.6	0	47.66	-	-	88.2	-40.54	57	122	V
	2400.042	50.96	ADR	32.5	-44.6	1.96	40.82	68.2	-27.38	-	-	57	122	V
5	* 9378.509	49.37	PK-U	36.6	-36.6	0	49.37	-	-	74	-24.63	30	375	V
	* 9376.247	37.29	ADR	36.5	-36.7	1.96	39.05	54	-14.95	-	-	30	375	V
6	13681.718	47.06	PK-U	38.8	-34.6	0	51.26	-	-	88.2	-36.94	194	319	V
	13682.777	35.5	ADR	38.8	-34.6	1.96	41.66	68.2	-26.54	-	-	194	319	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STRADDLE CHANNEL

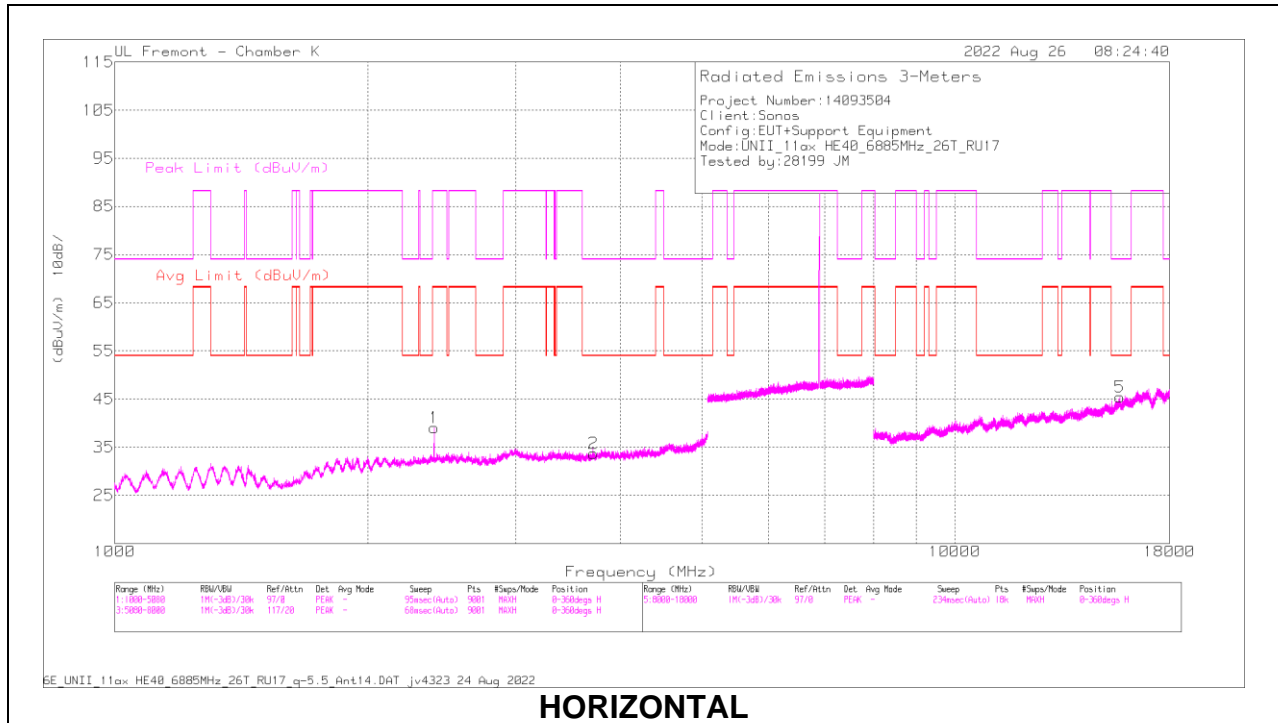

HORIZONTAL

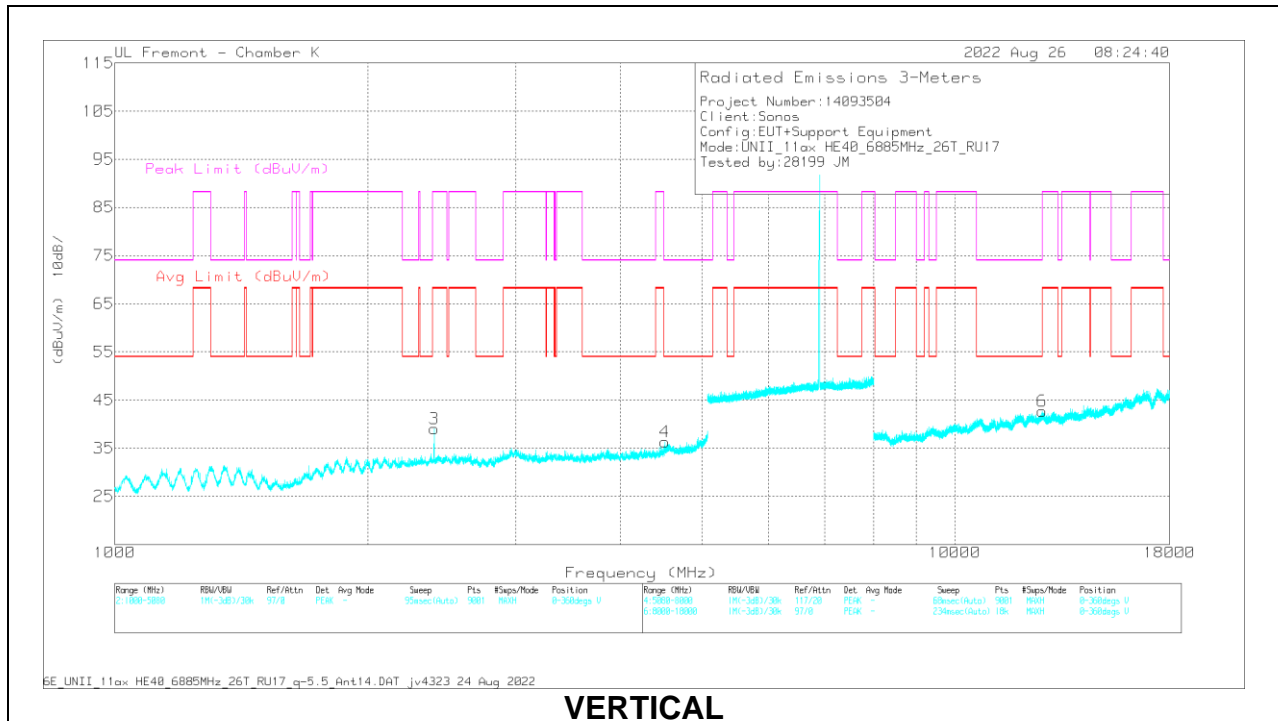

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.084	62.82	PK-U	32.5	-44.6	0	50.72	-	-	88.2	-37.48	269	99	H
	2399.94	54.04	ADR	32.5	-44.6	1.96	43.9	68.2	-24.3	-	-	269	99	H
2	* 3714.664	52.29	PK-U	33.4	-41.9	0	43.79	-	-	74	-30.21	147	367	H
	* 3715.447	40.46	ADR	33.4	-41.9	1.96	33.92	54	-20.08	-	-	147	367	H
3	2399.856	59.67	PK-U	32.5	-44.6	0	47.57	-	-	88.2	-40.63	138	171	V
	2399.972	50.36	ADR	32.5	-44.6	1.96	40.22	68.2	-27.98	-	-	138	171	V
4	* 4511.83	52.32	PK-U	34.1	-41.1	0	45.32	-	-	74	-28.68	190	149	V
	* 4515.358	40.11	ADR	34.2	-41.1	1.96	35.17	54	-18.83	-	-	190	149	V
5	* 15706.295	47.15	PK-U	40.6	-33.2	0	54.55	-	-	74	-19.45	12	373	H
	* 15702.614	35.33	ADR	40.6	-33.2	1.96	44.69	54	-9.31	-	-	12	373	H
6	12704.925	45.96	PK-U	39.1	-34.2	0	50.86	-	-	88.2	-37.34	236	211	V
	12703.902	34.72	ADR	39.1	-34.2	1.96	41.58	68.2	-26.62	-	-	236	211	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 484-Tones, RU Index 65

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

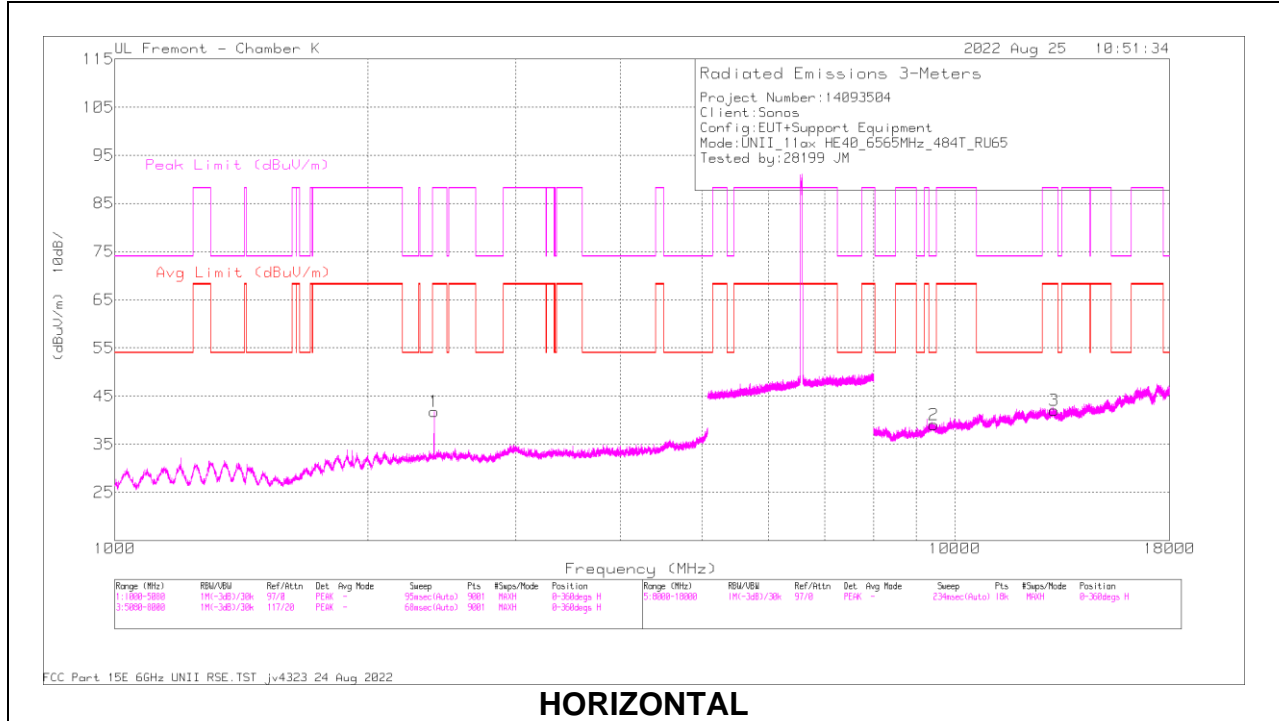

HORIZONTAL

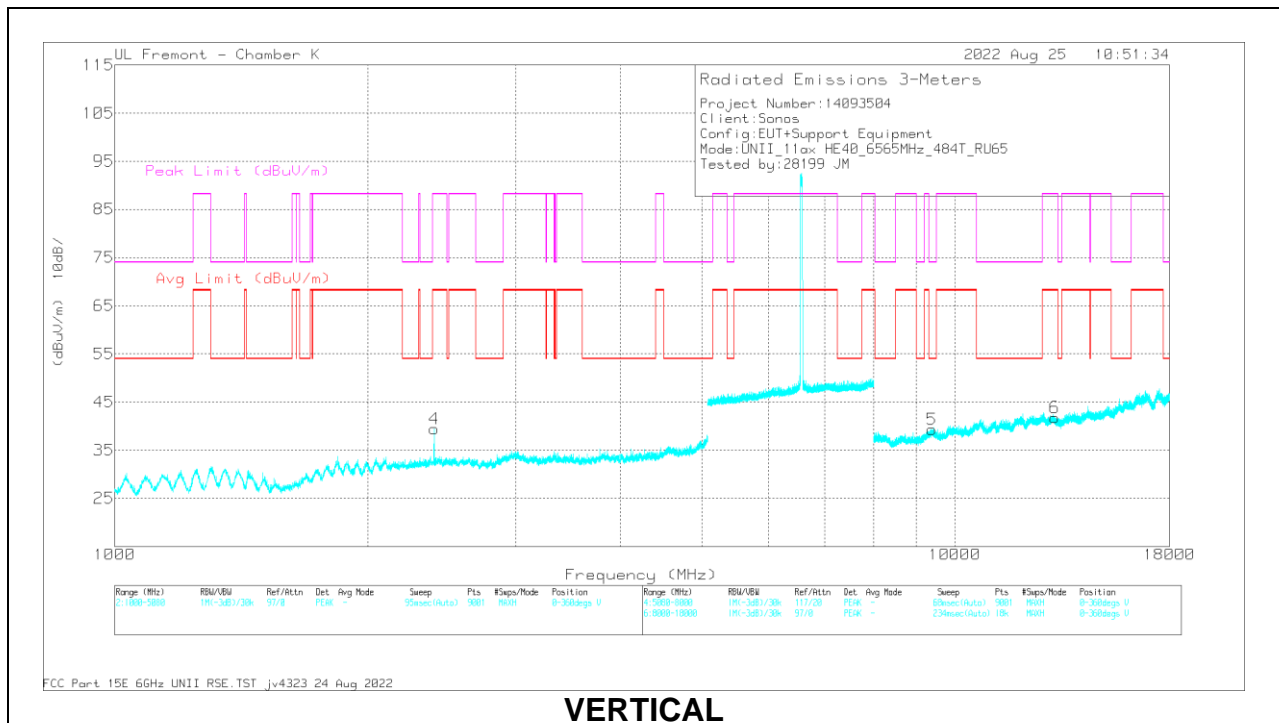

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Filtr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.032	62.37	PK-U	32.5	-44.6	0	50.27	-	-	88.2	-37.93	91	176	H
	2400.067	53.79	ADR	32.5	-44.6	2.96	44.65	68.2	-23.55	-	-	91	176	H
2	* 9430.741	48.7	PK-U	36.6	-36.5	0	48.8	-	-	74	-25.2	55	364	H
	* 9431.484	37.07	ADR	36.6	-36.5	2.96	40.13	54	-13.87	-	-	55	364	H
3	13129.81	47.18	PK-U	39	-34.4	0	51.78	-	-	88.2	-36.42	260	315	H
	13131.184	35.39	ADR	39	-34.4	2.96	42.95	68.2	-25.25	-	-	260	315	H
4	2400.062	61.59	PK-U	32.5	-44.6	0	49.49	-	-	88.2	-38.71	8	293	V
	2400.067	53.05	ADR	32.5	-44.6	2.96	43.91	68.2	-24.29	-	-	8	293	V
5	* 9394.116	49.15	PK-U	36.6	-36.6	0	49.15	-	-	74	-24.85	10	264	V
	* 9393.245	37.27	ADR	36.6	-36.7	2.96	40.13	54	-13.87	-	-	10	264	V
6	13142.803	46.58	PK-U	39	-34.4	0	51.18	-	-	88.2	-37.02	161	257	V
	13144.841	35.05	ADR	39	-34.4	2.96	42.61	68.2	-25.59	-	-	161	257	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL

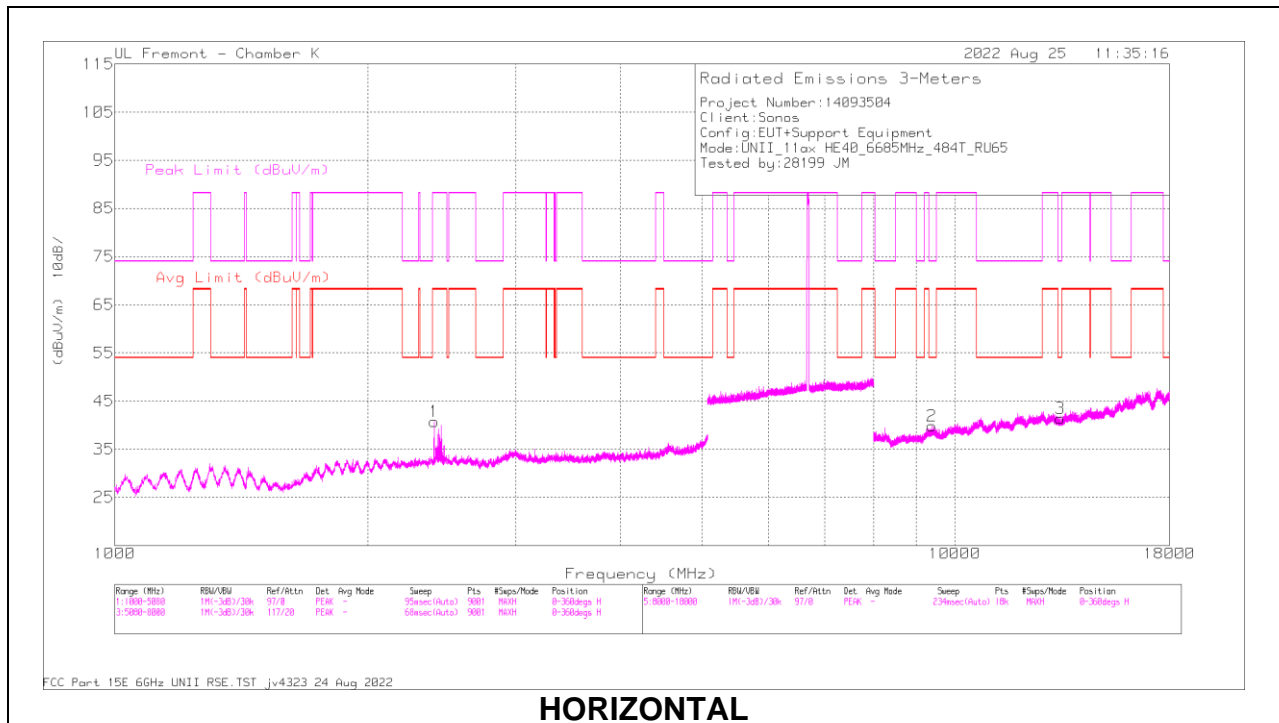

HORIZONTAL

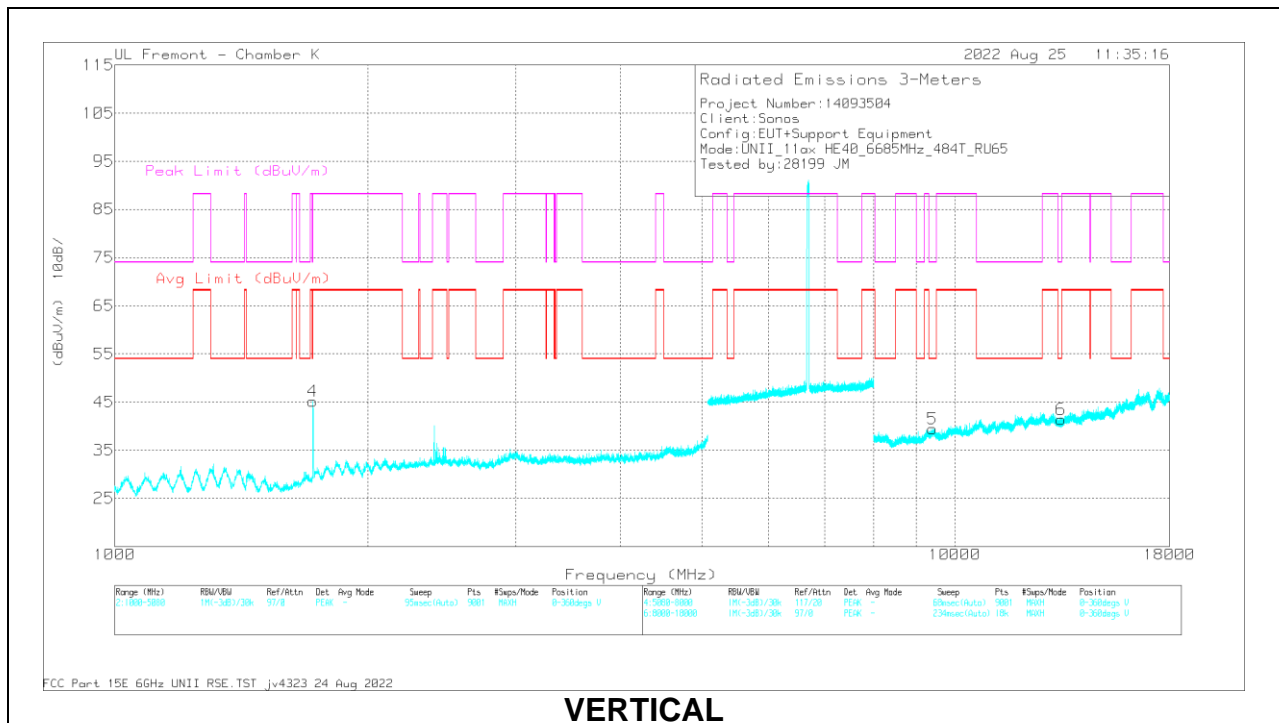

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.135	63.63	PK-U	32.5	-44.6	0	51.53	-	-	88.2	-36.67	90	307	H
	2400.007	53.91	ADR	32.5	-44.6	2.96	44.77	68.2	-23.43	-	-	90	307	H
2	* 9393.408	49.67	PK-U	36.6	-36.7	0	49.57	-	-	74	-24.43	139	105	H
	* 9392.138	36.86	ADR	36.6	-36.7	2.96	39.72	54	-14.28	-	-	139	105	H
3	* 13356.54	47.39	PK-U	39.1	-34.7	0	51.79	-	-	74	-22.21	142	295	H
	* 13359.249	34.64	ADR	39.1	-34.7	2.96	42	54	-12	-	-	142	295	H
4	* 1719.952	56.96	PK-U	29.1	-46.4	0	39.66	-	-	74	-34.34	276	202	V
	* 1721.719	45.04	ADR	29.2	-46.4	2.96	30.8	54	-23.2	-	-	276	202	V
5	* 9402.065	48.73	PK-U	36.6	-36.6	0	48.73	-	-	74	-25.27	320	277	V
	* 9403.823	37.18	ADR	36.6	-36.6	2.96	40.14	54	-13.86	-	-	320	277	V
6	* 13382.258	46.97	PK-U	39.1	-34.8	0	51.27	-	-	74	-22.73	129	381	V
	* 13382.969	34.8	ADR	39.1	-34.8	2.96	42.06	54	-11.94	-	-	129	381	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL

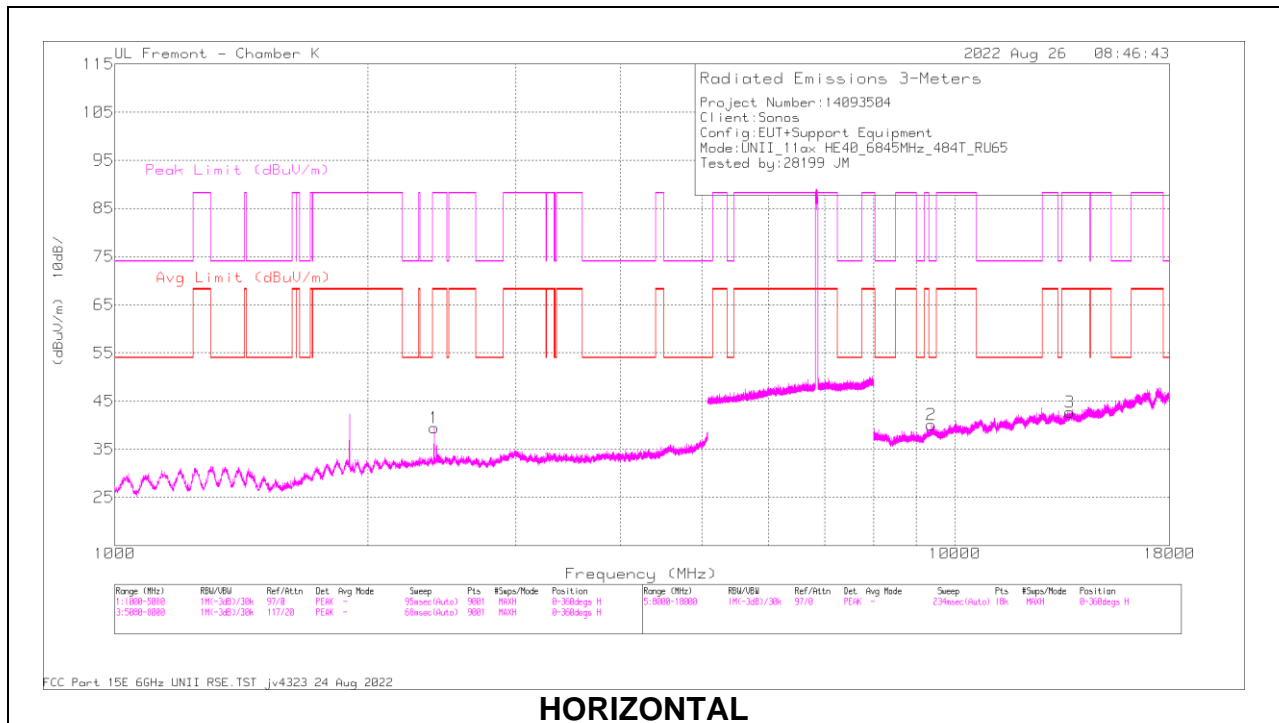

HORIZONTAL

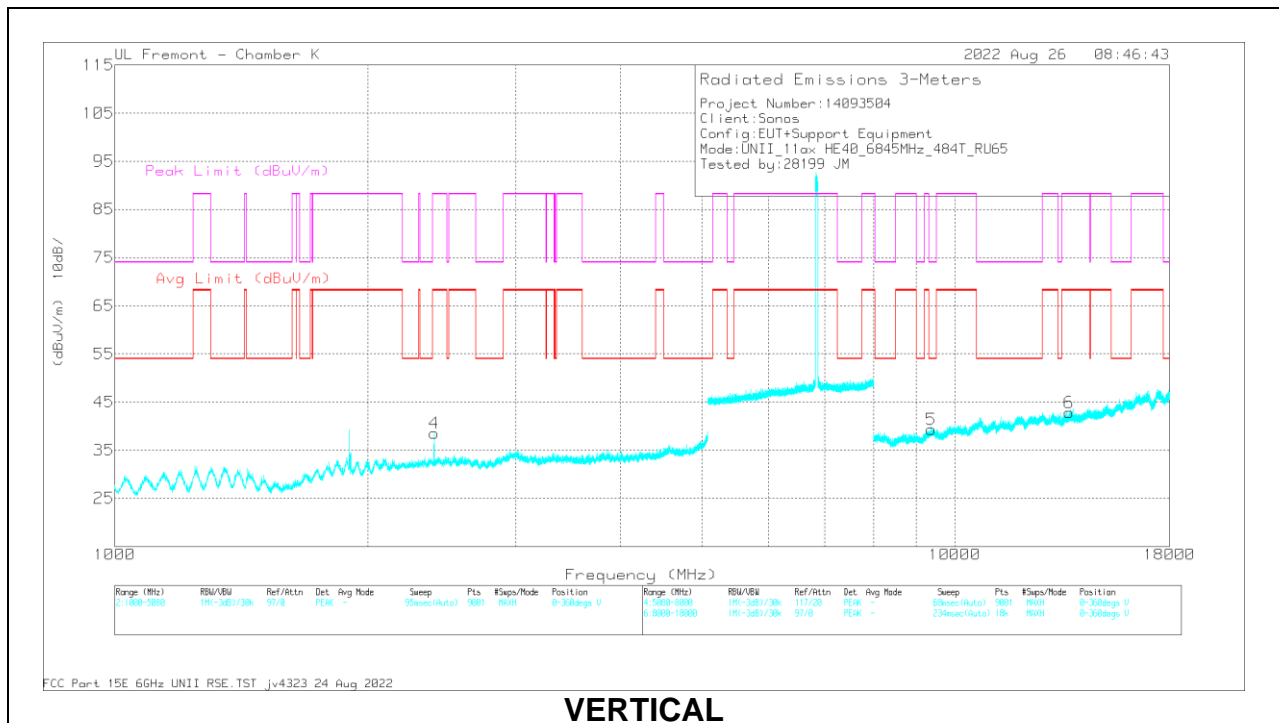

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2399.698	61.88	PK-U	32.5	-44.6	0	49.78	-	-	88.2	-38.42	258	307	H
	2400.072	52.66	ADR	32.5	-44.6	2.96	43.52	68.2	-24.68	-	-	258	307	H
2	* 9371.195	49.15	PK-U	36.5	-36.6	0	49.05	-	-	74	-24.95	118	381	H
	* 9372.035	37.26	ADR	36.5	-36.7	2.96	40.02	54	-13.98	-	-	118	381	H
3	13689.967	47.01	PK-U	38.8	-34.6	0	51.21	-	-	88.2	-36.99	54	134	H
	13690.079	34.93	ADR	38.8	-34.6	2.96	42.09	68.2	-26.11	-	-	54	134	H
4	2399.902	60.33	PK-U	32.5	-44.6	0	48.23	-	-	88.2	-39.97	58	122	V
	2400.007	51.15	ADR	32.5	-44.6	2.96	42.01	68.2	-26.19	-	-	58	122	V
5	* 9372.283	49.26	PK-U	36.5	-36.7	0	49.06	-	-	74	-24.94	305	331	V
	* 9371.296	37.19	ADR	36.5	-36.6	2.96	40.05	54	-13.95	-	-	305	331	V
6	13673.217	46.78	PK-U	38.8	-34.5	0	51.08	-	-	88.2	-37.12	246	187	V
	13672.85	35.29	ADR	38.8	-34.5	2.96	42.55	68.2	-25.65	-	-	246	187	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STRADDLE CHANNEL

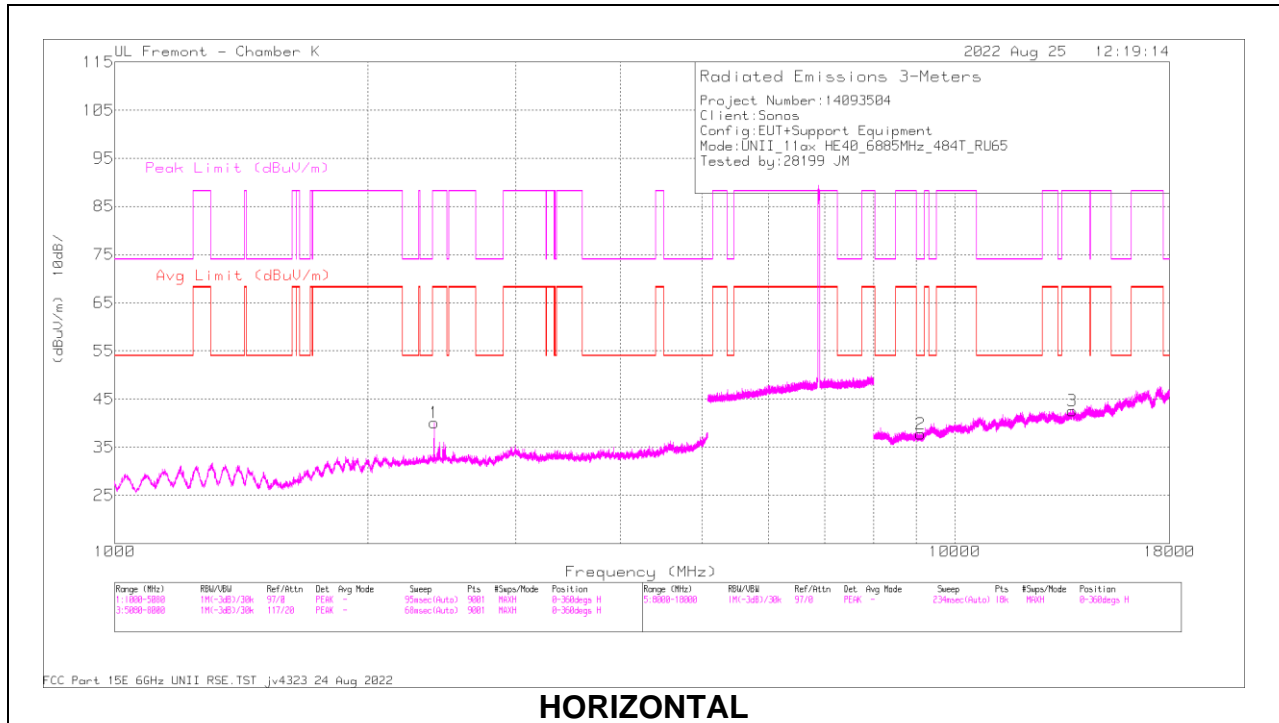

HORIZONTAL

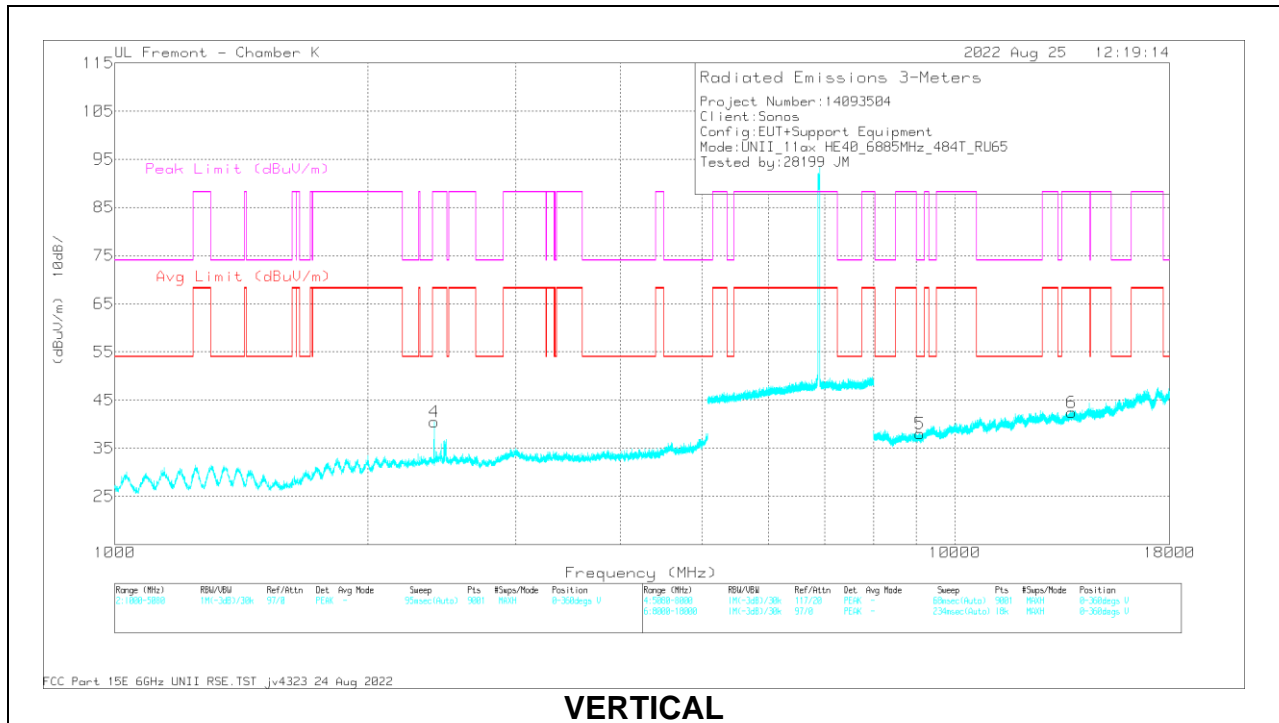

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2399.917	63.63	PK-U	32.5	-44.6	0	51.53	-	-	88.2	-36.67	90	313	H
	2400.052	53.8	ADR	32.5	-44.6	2.96	44.66	68.2	-23.54	-	-	90	313	H
2	*9111.002	48.37	PK-U	36.3	-36.8	0	47.87	-	-	74	-26.13	84	378	H
	*9111.905	36.23	ADR	36.3	-36.7	2.96	38.79	54	-15.21	-	-	84	378	H
3	13782.576	47.12	PK-U	38.8	-34.2	0	51.72	-	-	88.2	-36.48	248	176	H
	13783.798	35.05	ADR	38.8	-34.1	2.96	42.71	68.2	-25.49	-	-	248	176	H
4	2399.876	62.19	PK-U	32.5	-44.6	0	50.09	-	-	88.2	-38.11	7	236	V
	2399.98	53.22	ADR	32.5	-44.6	2.96	44.08	68.2	-24.12	-	-	7	236	V
5	*9091.87	47.7	PK-U	36.3	-36.7	0	47.3	-	-	74	-26.7	353	134	V
	*9090.812	35.78	ADR	36.3	-36.7	2.96	38.34	54	-15.66	-	-	353	134	V
6	13777.808	47.19	PK-U	38.8	-34.2	0	51.79	-	-	88.2	-36.41	10	245	V
	13778.068	35.36	ADR	38.8	-34.2	2.96	42.92	68.2	-25.28	-	-	10	245	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.9. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE UNII-7 BAND


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 0

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

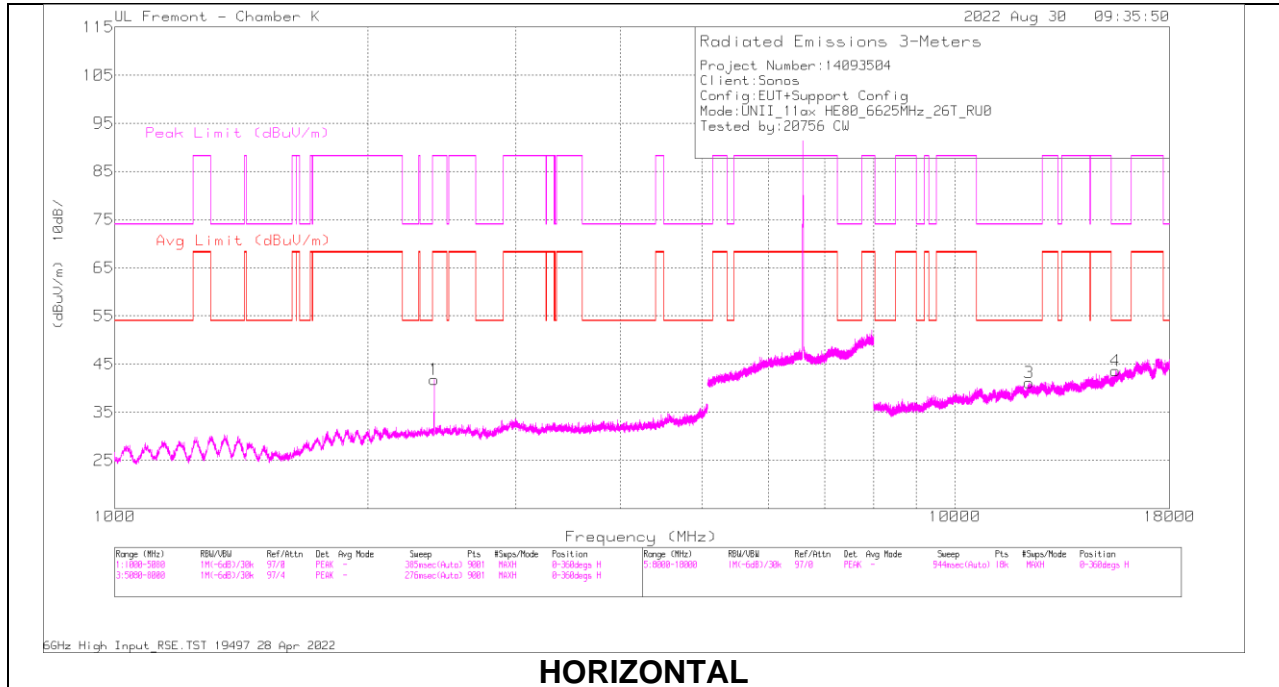

HORIZONTAL

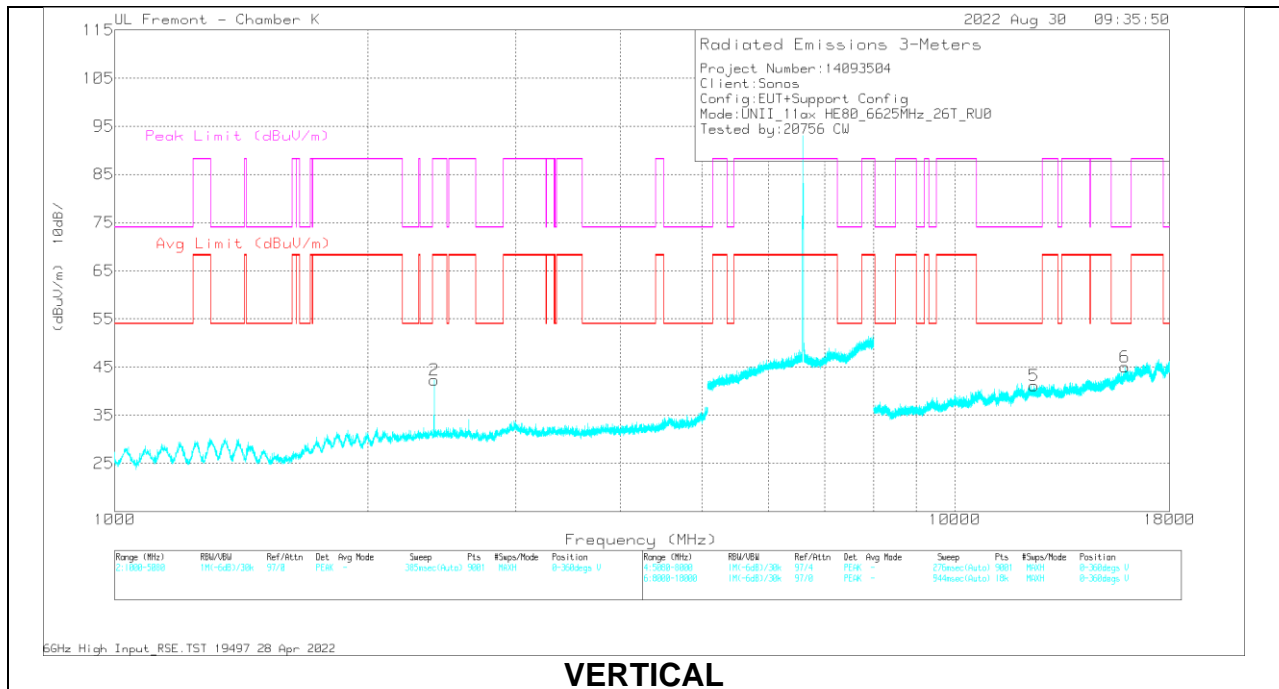

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2399.98	61.53	PK-U	32.5	-44.6	0	49.43	-	-	88.2	-38.77	266	367	H
	2400.076	54.15	ADR	32.5	-44.6	1.96	44.01	68.2	-24.19	-	-	266	367	H
2	2400.276	61.56	PK-U	32.5	-44.6	0	49.46	-	-	88.2	-38.74	46	187	V
	2400.032	54.56	ADR	32.5	-44.6	1.96	44.42	68.2	-23.78	-	-	46	187	V
3	* 12257.659	45.12	PK-U	39	-34.5	0	49.62	-	-	74	-24.38	266	354	H
	* 12256.257	33.24	ADR	39	-34.5	1.96	39.7	54	-14.3	-	-	266	354	H
4	* 15514.662	44.89	PK-U	40.4	-33.3	0	51.99	-	-	74	-22.01	9	201	H
	* 15514.767	32.91	ADR	40.4	-33.3	1.96	41.97	54	-12.03	-	-	9	201	H
5	* 12430.611	45.09	PK-U	38.9	-34.4	0	49.59	-	-	74	-24.41	20	163	V
	* 12430.36	33.32	ADR	38.9	-34.4	1.96	39.78	54	-14.22	-	-	20	163	V
6	* 15923.944	45.12	PK-U	41	-33	0	53.12	-	-	74	-20.88	53	358	V
	* 15923.915	33.17	ADR	41	-33	1.96	43.13	54	-10.87	-	-	53	358	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 18

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL

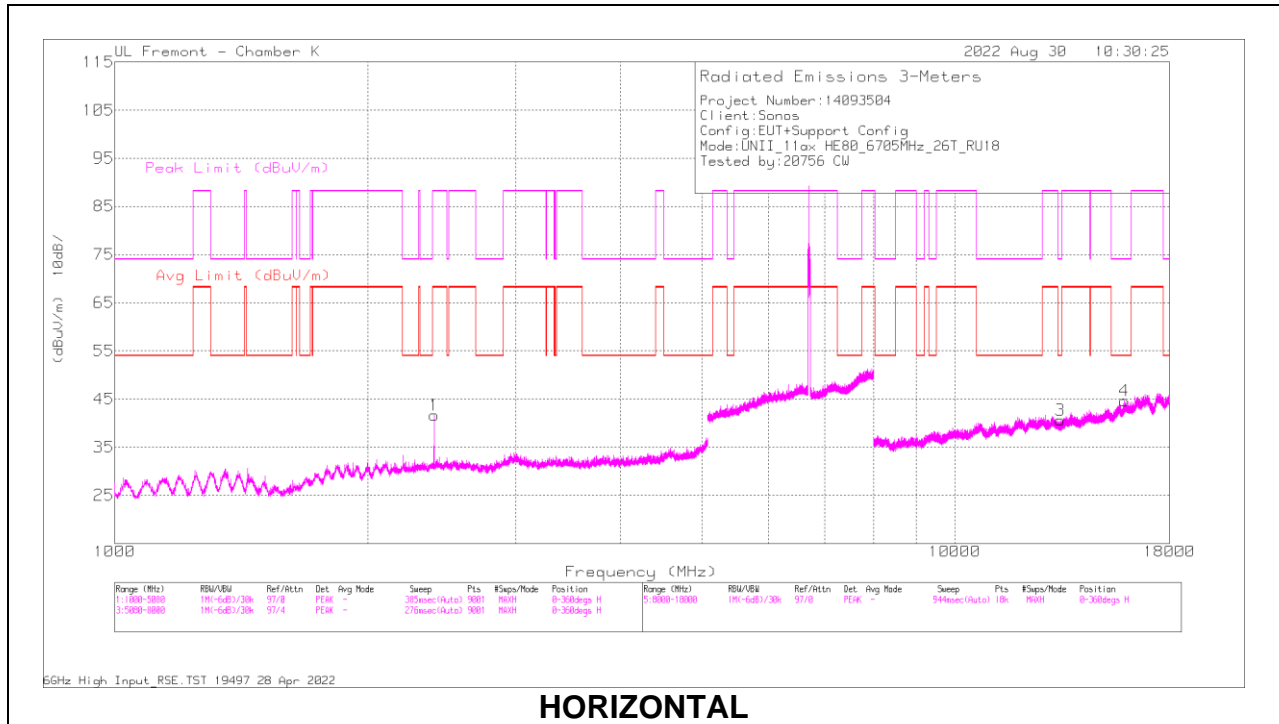

HORIZONTAL

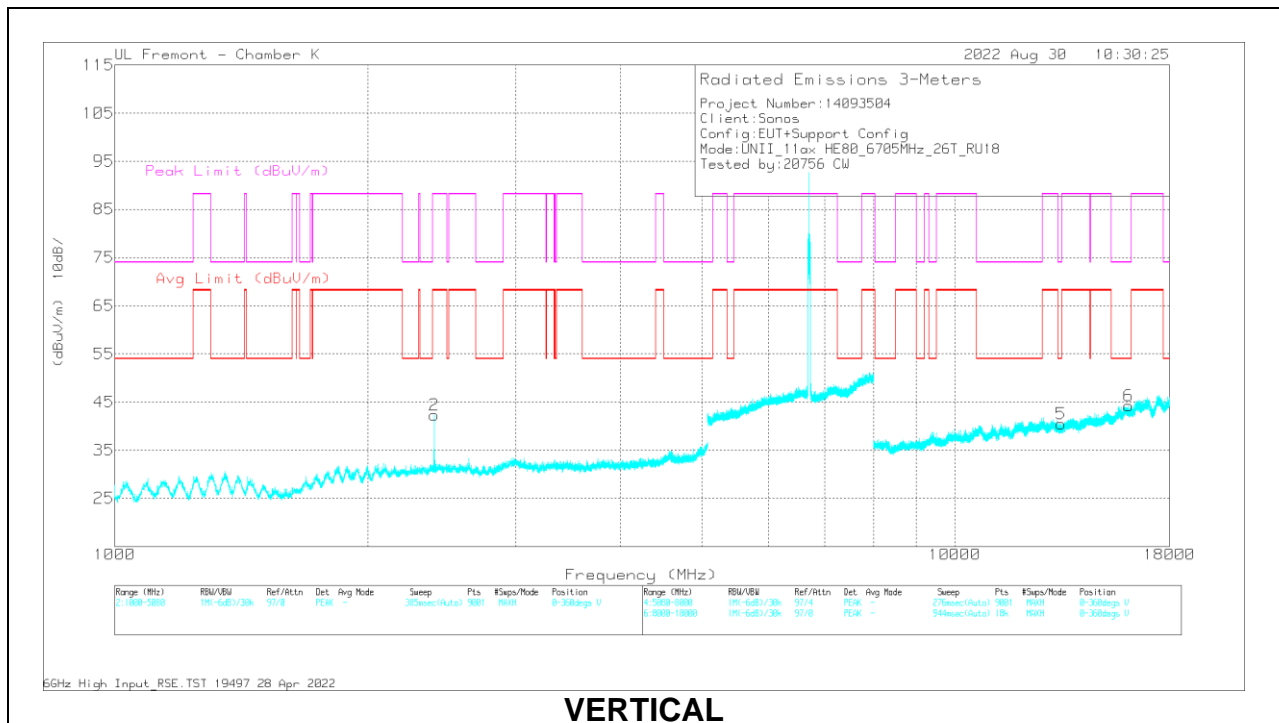

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.084	61.76	PK-U	32.5	-44.6	0	49.66	-	-	88.2	-38.54	266	368	H
	2400.008	54.2	ADR	32.5	-44.6	1.96	44.06	68.2	-24.14	-	-	266	368	H
2	2400.088	61.6	PK-U	32.5	-44.6	0	49.5	-	-	88.2	-38.7	45	188	V
	2400.032	54.59	ADR	32.5	-44.6	1.96	44.45	68.2	-23.75	-	-	45	188	V
3	* 13361.34	45.54	PK-U	39.1	-34.8	0	49.84	-	-	74	-24.16	202	359	H
	* 13360.948	33.4	ADR	39.1	-34.8	1.96	39.66	54	-14.34	-	-	202	359	H
4	* 15907.884	44.65	PK-U	40.9	-33.2	0	52.35	-	-	74	-21.65	25	209	H
	* 15907.776	32.89	ADR	40.9	-33.2	1.96	42.55	54	-11.45	-	-	25	209	H
5	* 13364.885	45.79	PK-U	39.1	-34.7	0	50.19	-	-	74	-23.81	219	378	V
	* 13365.84	33.4	ADR	39.1	-34.8	1.96	39.66	54	-14.34	-	-	219	378	V
6	* 16108.655	44.7	PK-U	41.2	-33.3	0	52.6	-	-	74	-21.4	5	164	V
	* 16108.371	33.02	ADR	41.2	-33.3	1.96	42.88	54	-11.12	-	-	5	164	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 36

HARMONICS AND SPURIOUS EMISSIONS

HIGH CHANNEL

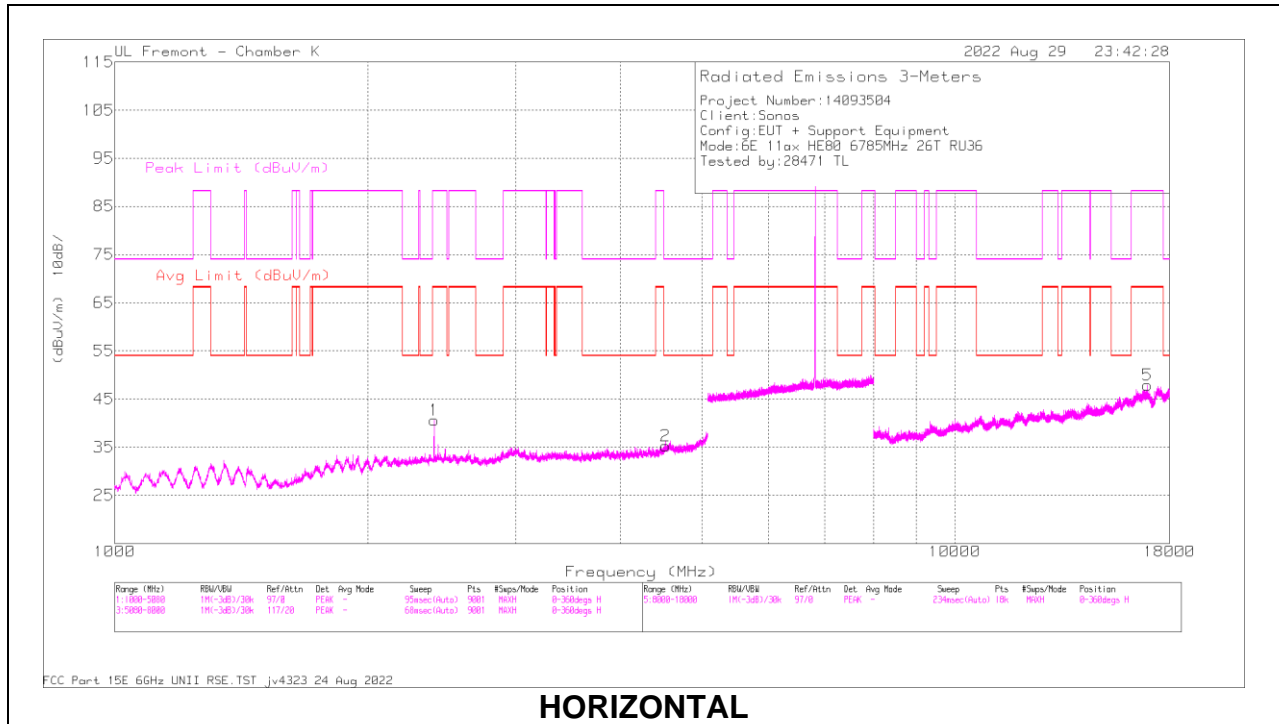

HORIZONTAL

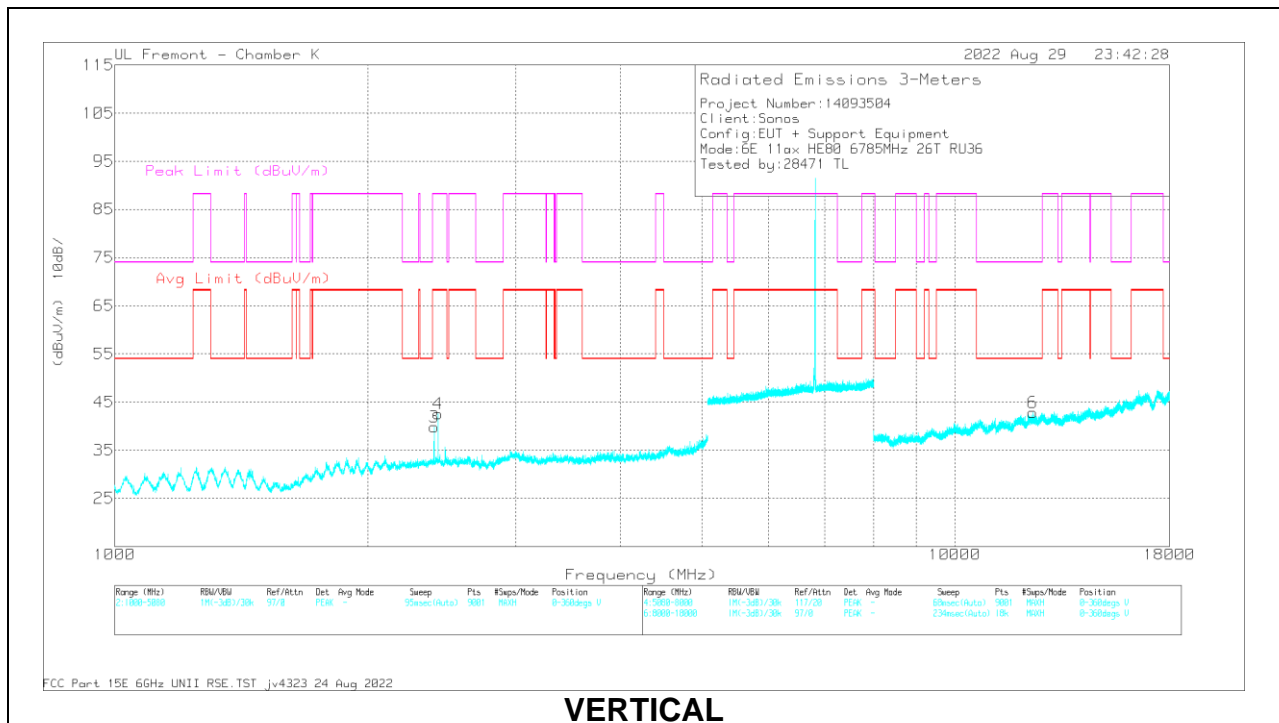

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.216	64.3	PK-U	32.5	-44.6	0	52.2	-	-	88.2	-36	99	266	H
	2400	54.27	ADR	32.5	-44.6	1.96	44.13	68.2	-24.07	-	-	99	266	H
2	* 4526.279	52.71	PK-U	34.2	-41	0	45.91	-	-	74	-28.09	140	370	H
	* 4527.978	40.21	ADR	34.2	-41	1.96	35.37	54	-18.63	-	-	140	370	H
3	2399.697	60.27	PK-U	32.5	-44.6	0	48.17	-	-	88.2	-40.03	64	105	V
	2399.964	51.97	ADR	32.5	-44.6	1.96	41.83	68.2	-26.37	-	-	64	105	V
4	2425.82	59.3	PK-U	32.5	-44.5	0	47.3	-	-	88.2	-40.9	181	100	V
	2426.06	43.64	ADR	32.5	-44.5	1.96	33.6	68.2	-34.6	-	-	181	100	V
5	16936.999	46.55	PK-U	42.1	-32.4	0	56.25	-	-	88.2	-31.95	196	375	H
	16937.29	34.66	ADR	42.1	-32.4	1.96	46.32	68.2	-21.88	-	-	196	375	H
6	* 12376.662	46.78	PK-U	38.9	-34.4	0	51.28	-	-	74	-22.72	54	247	V
	* 12376.394	35.05	ADR	38.9	-34.4	1.96	41.51	54	-12.49	-	-	54	247	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STRADDLE CHANNEL

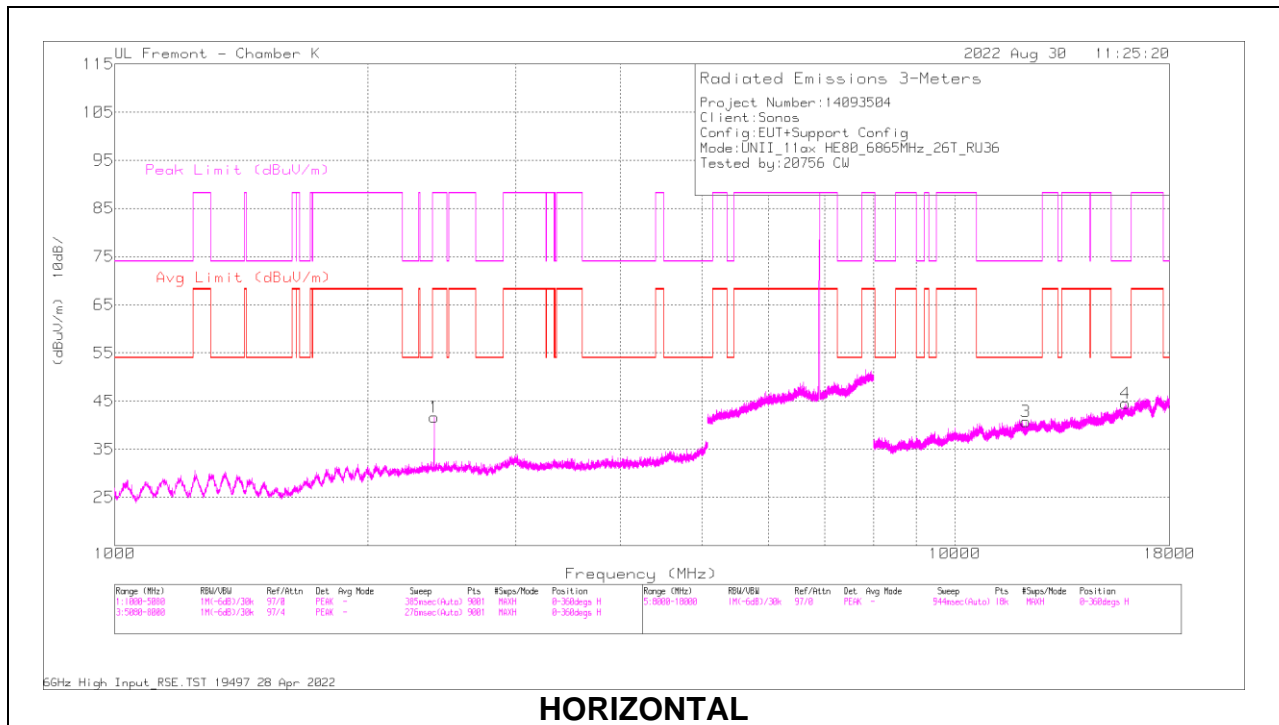

HORIZONTAL

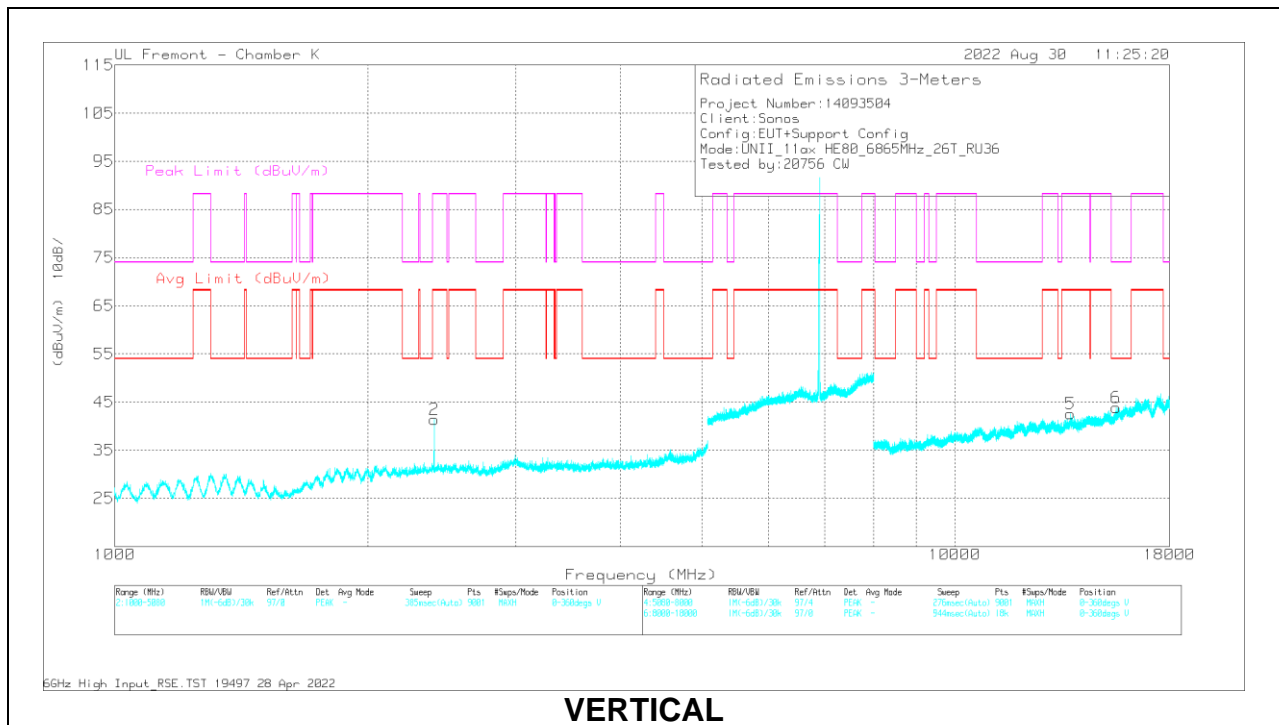

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2399.908	60.55	PK-U	32.5	-44.6	0	48.45	-	-	88.2	-39.75	266	365	H
	2400.092	53.92	ADR	32.5	-44.6	1.96	43.78	68.2	-24.42	-	-	266	365	H
2	2399.804	61.32	PK-U	32.5	-44.6	0	49.22	-	-	88.2	-38.98	50	188	V
	2400.088	54.27	ADR	32.5	-44.6	1.96	44.13	68.2	-24.07	-	-	50	188	V
3	* 12157.709	45.21	PK-U	38.9	-34.6	0	49.51	-	-	74	-24.49	203	272	H
	* 12156.658	33.32	ADR	38.9	-34.5	1.96	39.68	54	-14.32	-	-	203	272	H
4	* 15954.595	45.23	PK-U	41	-33.3	0	52.93	-	-	74	-21.07	333	264	H
	* 15954.369	33.48	ADR	41	-33.3	1.96	43.14	54	-10.86	-	-	333	264	H
5	13720.341	45.71	PK-U	38.7	-34.1	0	50.31	-	-	88.2	-37.89	274	212	V
	13723.438	34.02	ADR	38.7	-34	1.96	40.68	68.2	-27.52	-	-	274	212	V
6	* 15544.457	44.82	PK-U	40.4	-33.5	0	51.72	-	-	74	-22.28	294	245	V
	* 15544.72	33.44	ADR	40.4	-33.5	1.96	42.3	54	-11.7	-	-	294	245	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 996-Tones, RU Index 67

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

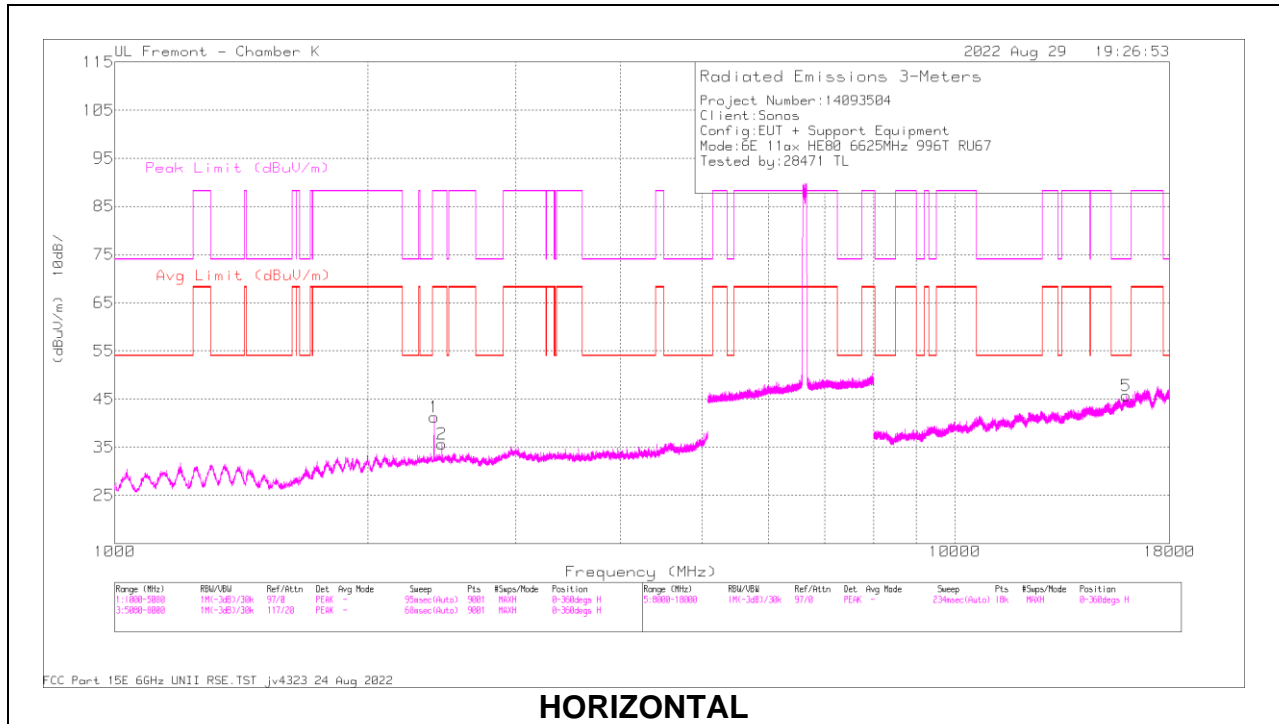

HORIZONTAL

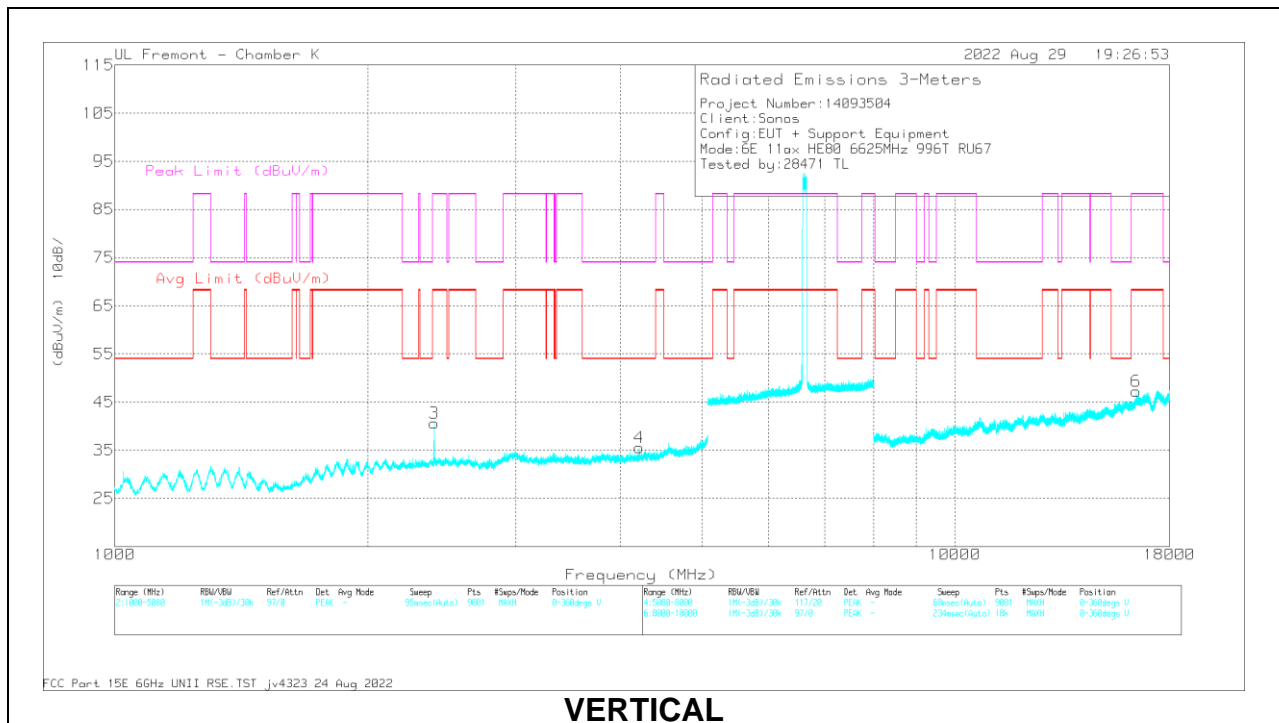

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2399.98	63.02	PK-U	32.5	-44.6	0	50.92	-	-	88.2	-37.28	94	259	H
	2400.028	53.62	ADR	32.5	-44.6	3.25	44.77	68.2	-23.43	-	-	94	259	H
2	2451.343	55.27	PK-U	32.4	-44.4	0	43.27	-	-	88.2	-44.93	283	137	H
	2449.373	42.94	ADR	32.4	-44.4	3.25	34.19	68.2	-34.01	-	-	283	137	H
3	2399.936	60.51	PK-U	32.5	-44.6	0	48.41	-	-	88.2	-39.79	57	99	V
	2400.016	51.55	ADR	32.5	-44.6	3.25	42.7	68.2	-25.5	-	-	57	99	V
4	* 4209.505	52.31	PK-U	33.7	-41.4	0	44.61	-	-	74	-29.39	145	334	V
	* 4210.999	39.96	ADR	33.7	-41.4	3.25	35.51	54	-18.49	-	-	145	334	V
5	* 15986.244	46.1	PK-U	41.1	-33.2	0	54	-	-	74	-20	4	350	H
	* 15987.41	34.64	ADR	41.1	-33.2	3.25	45.79	54	-8.21	-	-	4	350	H
6	16441.179	46.88	PK-U	41.5	-32.9	0	55.48	-	-	88.2	-32.72	289	316	V
	16440.899	34.97	ADR	41.5	-32.9	3.25	46.82	68.2	-21.38	-	-	289	316	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL

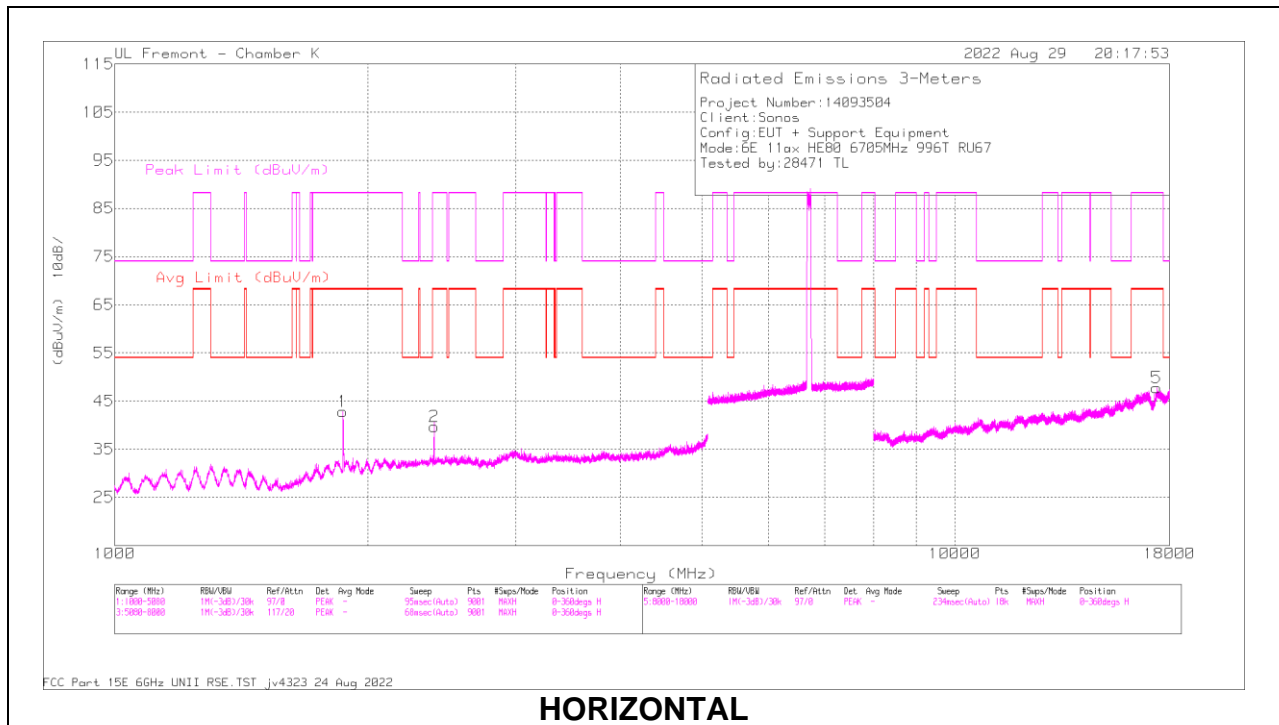

HORIZONTAL

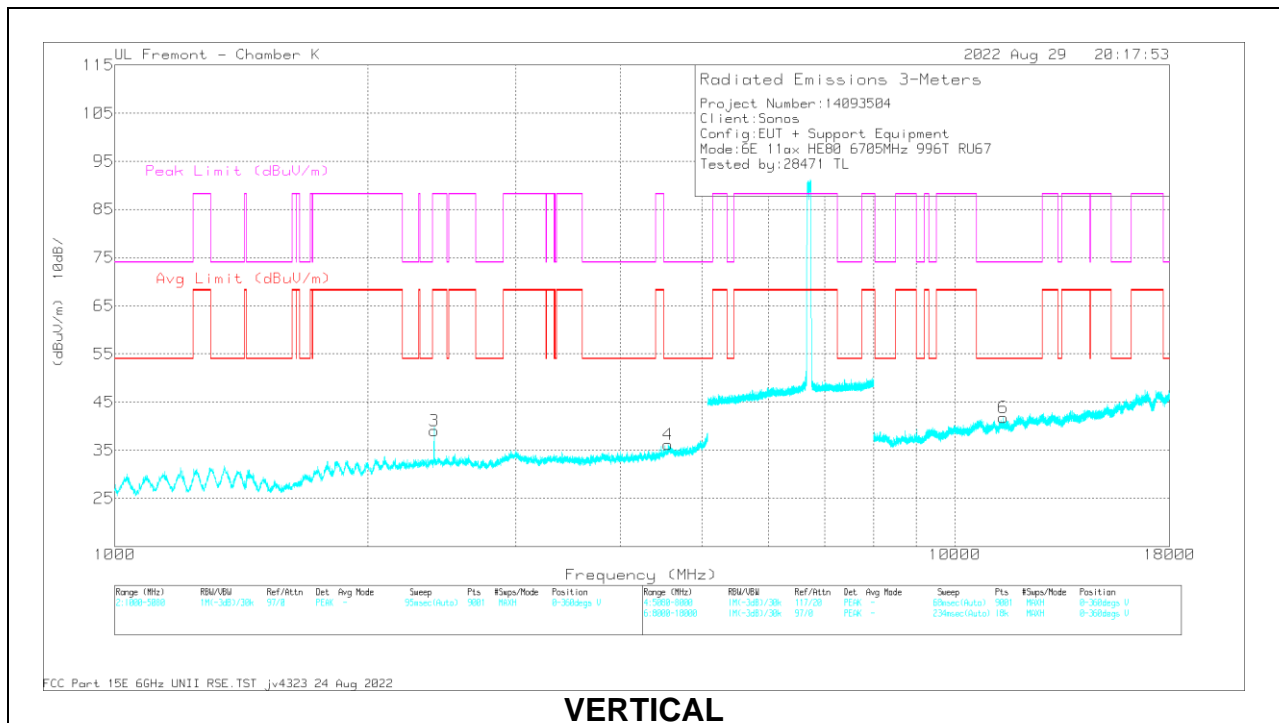

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1867.437	57.75	PK-U	31.2	-45.6	0	43.35	-	-	88.2	-44.85	4	310	H
	1870.174	43.45	ADR	31.2	-45.8	3.25	32.1	68.2	-36.1	-	-	4	310	H
2	2399.267	65.98	PK-U	32.5	-44.6	0	53.88	-	-	88.2	-34.32	99	266	H
	2400.098	54.33	ADR	32.5	-44.6	3.25	45.48	68.2	-22.72	-	-	99	266	H
3	2400.09	61.08	PK-U	32.5	-44.6	0	48.98	-	-	88.2	-39.22	65	101	V
	2400.054	52.42	ADR	32.5	-44.6	3.25	43.57	68.2	-24.63	-	-	65	101	V
4	* 4557.305	51.95	PK-U	34.3	-41.1	0	45.15	-	-	74	-28.85	288	293	V
	* 4556.809	40.05	ADR	34.3	-41.1	3.25	36.5	54	-17.5	-	-	288	293	V
5	17376.515	45.5	PK-U	41.4	-30.9	0	56	-	-	88.2	-32.2	65	225	H
	17374.249	33.55	ADR	41.4	-30.9	3.25	47.3	68.2	-20.9	-	-	65	225	H
6	* 11412.466	48.27	PK-U	38.2	-36	0	50.47	-	-	74	-23.53	123	345	V
	* 11413.937	36.63	ADR	38.2	-36	3.25	42.08	54	-11.92	-	-	123	345	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL

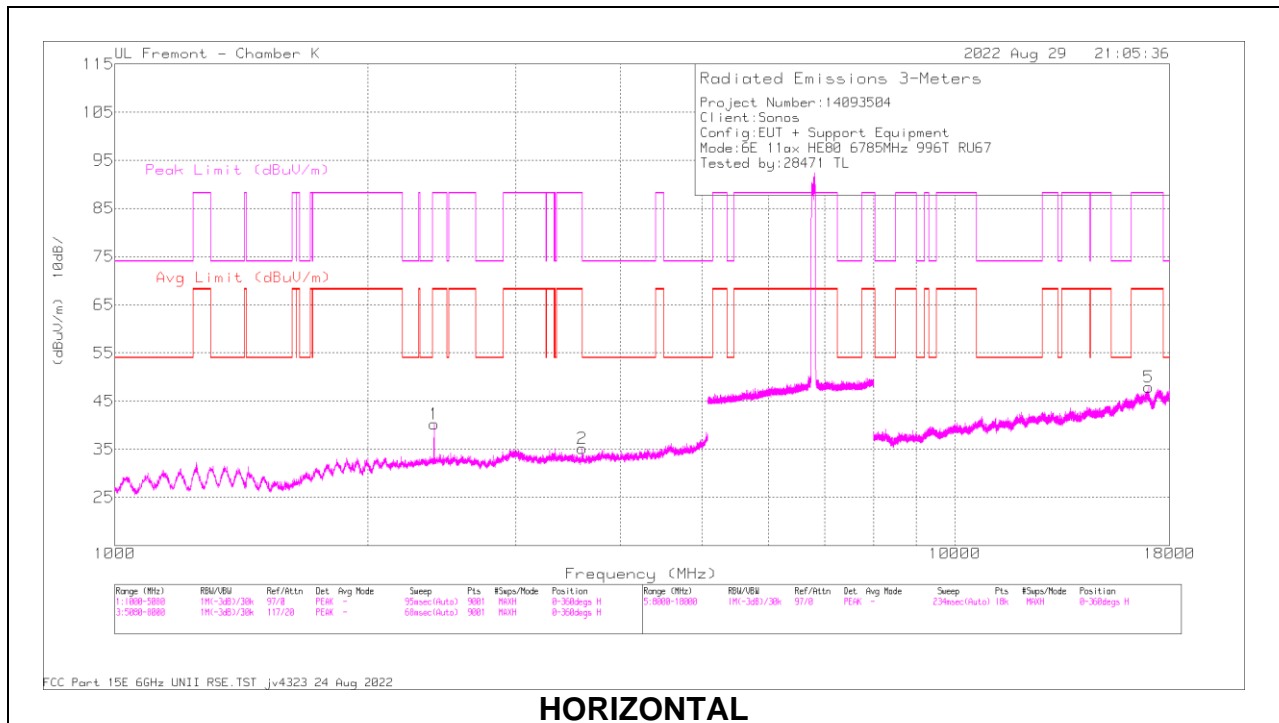

HORIZONTAL

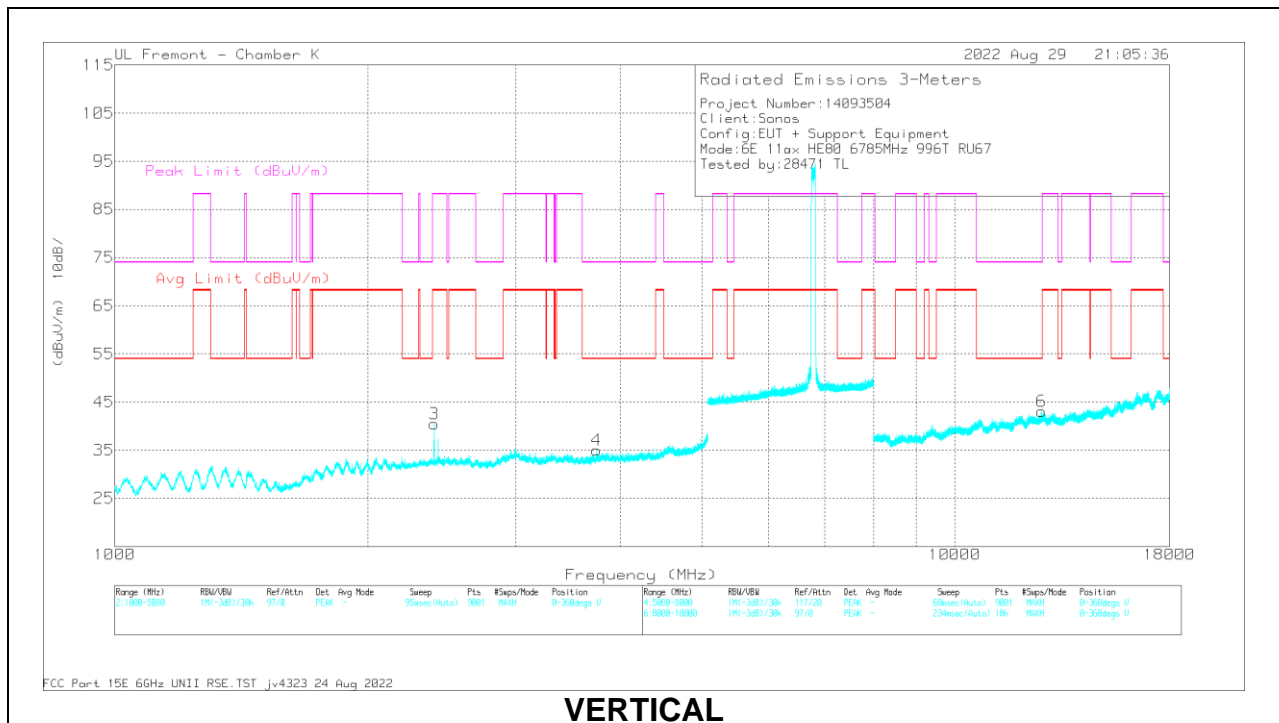

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2399.804	62.92	PK-U	32.5	-44.6	0	50.82	-	-	88.2	-37.38	100	174	H
	2400.108	53.4	ADR	32.5	-44.6	3.25	44.55	68.2	-23.65	-	-	100	174	H
2	* 3601.114	52.47	PK-U	33	-41.8	0	43.67	-	-	74	-30.33	187	218	H
	* 3601.154	40.4	ADR	33	-41.8	3.25	34.85	54	-19.15	-	-	187	218	H
3	2400.196	60.78	PK-U	32.5	-44.6	0	48.68	-	-	88.2	-39.52	62	129	V
	2400.104	51.78	ADR	32.5	-44.6	3.25	42.93	68.2	-25.27	-	-	62	129	V
4	* 3747.935	52.12	PK-U	33.4	-41.8	0	43.72	-	-	74	-30.28	272	352	V
	* 3749.753	40.45	ADR	33.4	-41.8	3.25	35.3	54	-18.7	-	-	272	352	V
5	17005.58	46.07	PK-U	42	-32.1	0	55.97	-	-	88.2	-32.23	103	344	H
	17002.934	34.27	ADR	42	-32.1	3.25	47.42	68.2	-20.78	-	-	103	344	H
6	* 12688.799	46.21	PK-U	39.1	-34.1	0	51.21	-	-	74	-22.79	342	355	V
	* 12689.658	34.79	ADR	39.1	-34.2	3.25	42.94	54	-11.06	-	-	342	355	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STRADDLE CHANNEL

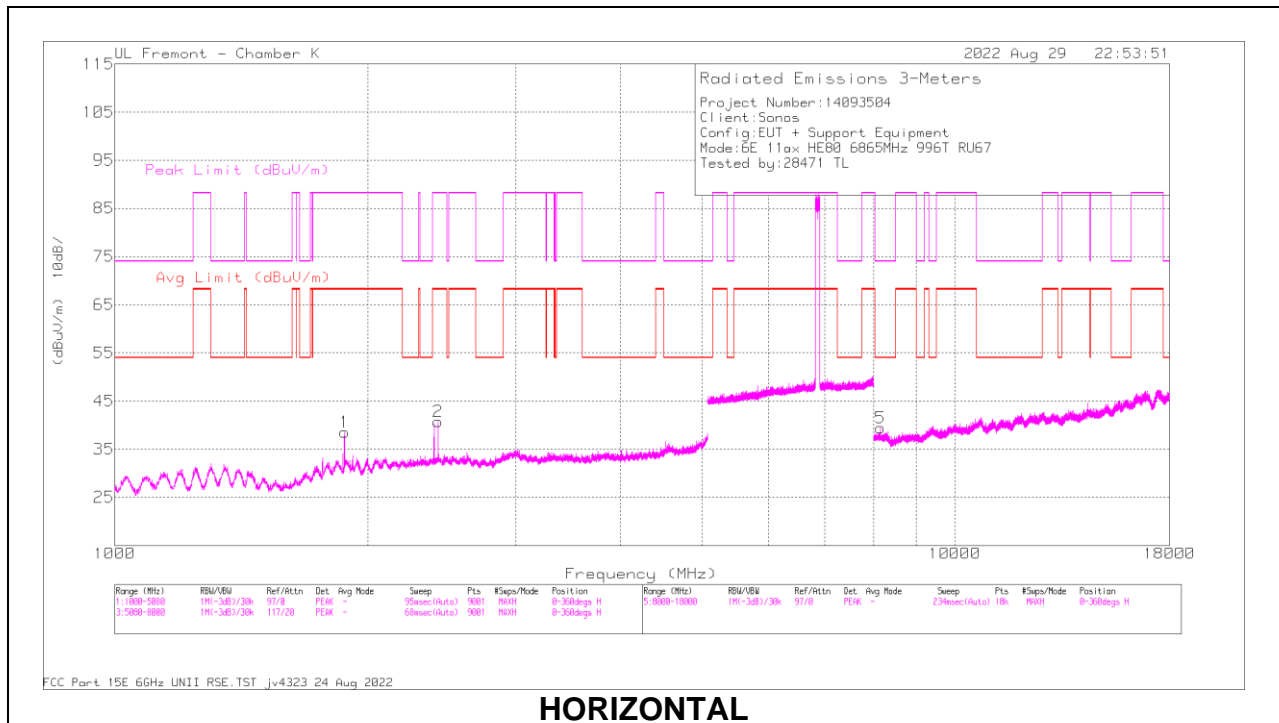

HORIZONTAL

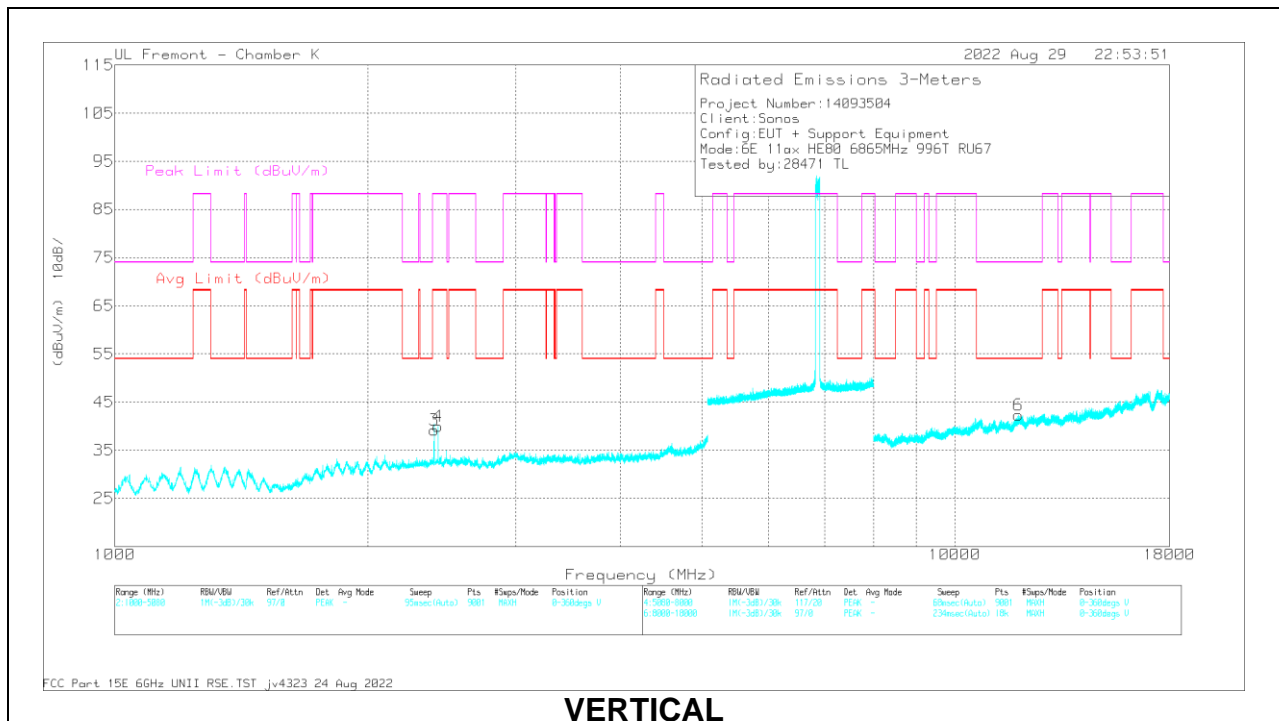

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1879.051	56.64	PK-U	31.2	-45.5	0	42.34	-	-	88.2	-45.86	81	343	H
	1878.668	44.27	ADR	31.2	-45.6	3.25	33.12	68.2	-35.08	-	-	81	343	H
2	2425.95	60.43	PK-U	32.5	-44.5	0	48.43	-	-	88.2	-39.77	196	348	H
	2425.986	43.6	ADR	32.5	-44.5	3.25	34.85	68.2	-33.35	-	-	196	348	H
3	2400.558	61.62	PK-U	32.5	-44.7	0	49.42	-	-	88.2	-38.78	64	102	V
	2400.122	52.27	ADR	32.5	-44.6	3.25	43.42	68.2	-24.78	-	-	64	102	V
4	2426.198	60.48	PK-U	32.5	-44.5	0	48.48	-	-	88.2	-39.72	351	346	V
	2426.609	43.63	ADR	32.5	-44.5	3.25	34.88	68.2	-33.32	-	-	351	346	V
5	* 8153.141	49.63	PK-U	35.8	-37.5	0	47.93	-	-	74	-26.07	301	323	H
	* 8154.528	37.91	ADR	35.8	-37.5	3.25	39.46	54	-14.54	-	-	301	323	H
6	* 11898.954	47.36	PK-U	38.6	-34.8	0	51.16	-	-	74	-22.84	118	168	V
	* 11898.027	35.38	ADR	38.6	-34.8	3.25	42.43	54	-11.57	-	-	118	168	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak



ADR - U-NII AD primary method, RMS average

10.1.10. TX ABOVE 1 GHz 802.11ax HE20 MODE IN THE UNII-8 BAND

2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 0

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

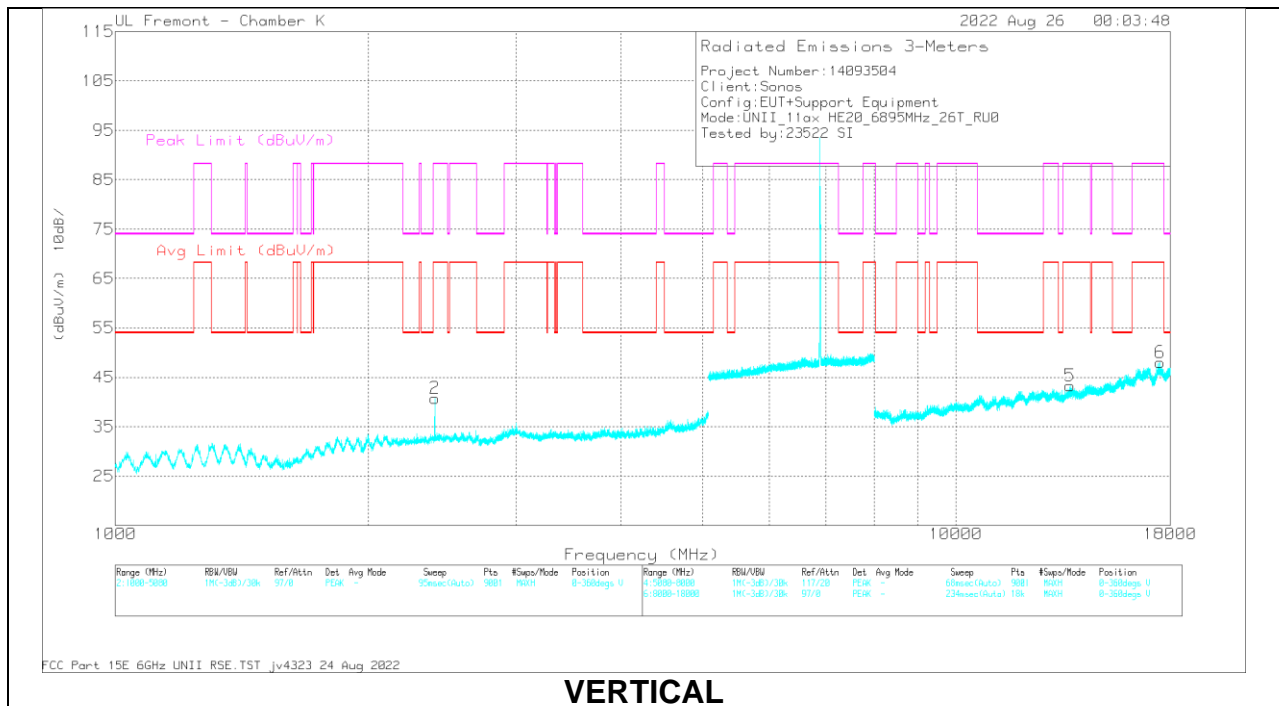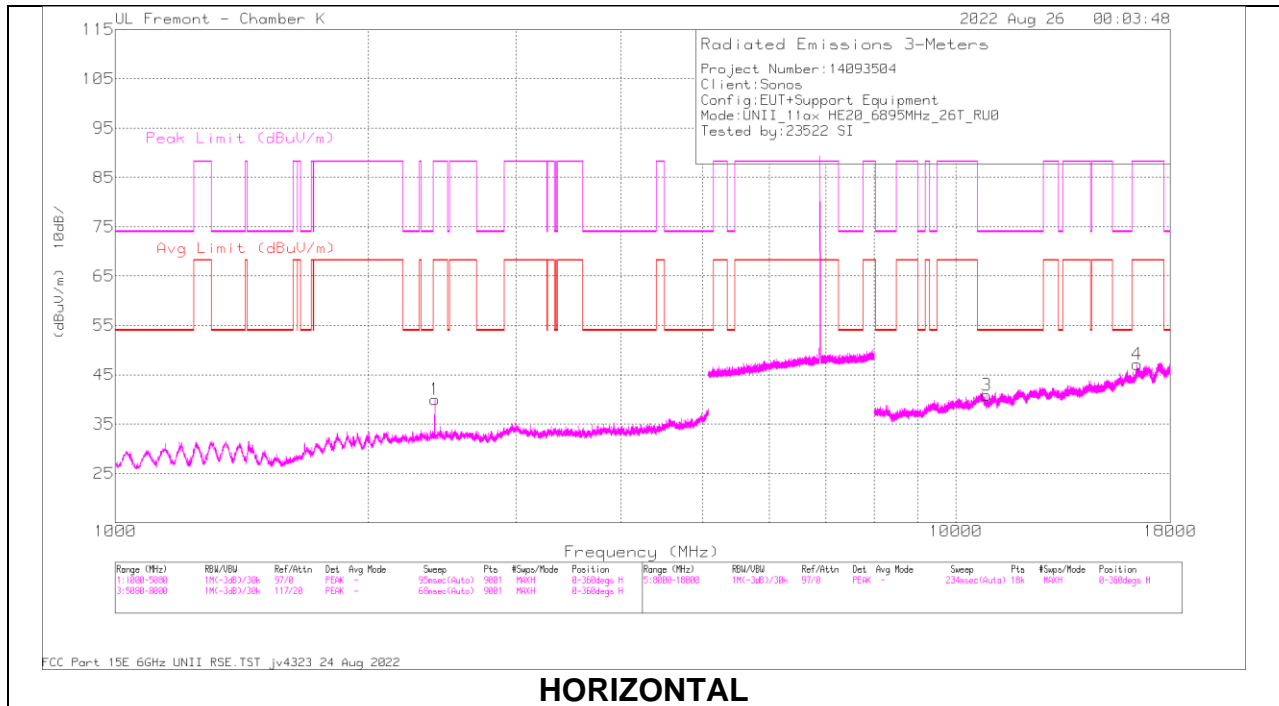

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80402 ACF(dB) - 3mH	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2399.88	64.39	PK-U	32.5	-44.6	0	52.29	-	-	88.2	-35.91	93	310	H
	2400.004	54.82	ADR	32.5	-44.6	1.96	44.68	68.2	-23.52	-	-	93	310	H
2	2399.816	62.96	PK-U	32.5	-44.6	0	50.86	-	-	88.2	-37.34	5	236	V
	2400.104	53.49	ADR	32.5	-44.6	1.96	43.35	68.2	-24.85	-	-	5	236	V
3	* 10891.116	48.34	PK-U	37.9	-36.3	0	49.94	-	-	74	-24.06	148	347	H
	* 10890.948	36.42	ADR	37.9	-36.3	1.96	39.98	54	-14.02	-	-	148	347	H
4	16437.937	46.64	PK-U	41.5	-32.9	0	55.24	-	-	88.2	-32.96	296	388	H
	16436.902	35.05	ADR	41.5	-32.9	1.96	45.61	68.2	-22.59	-	-	296	388	H
5	13676.83	47.27	PK-U	38.8	-34.6	0	51.47	-	-	88.2	-36.73	240	326	V
	13673.677	35.9	ADR	38.8	-34.5	1.96	42.16	68.2	-26.04	-	-	240	326	V
6	17502.923	45.91	PK-U	41.4	-31.1	0	56.21	-	-	88.2	-31.99	149	327	V
	17503.774	34.12	ADR	41.4	-31	1.96	46.48	68.2	-21.72	-	-	149	327	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 4

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL

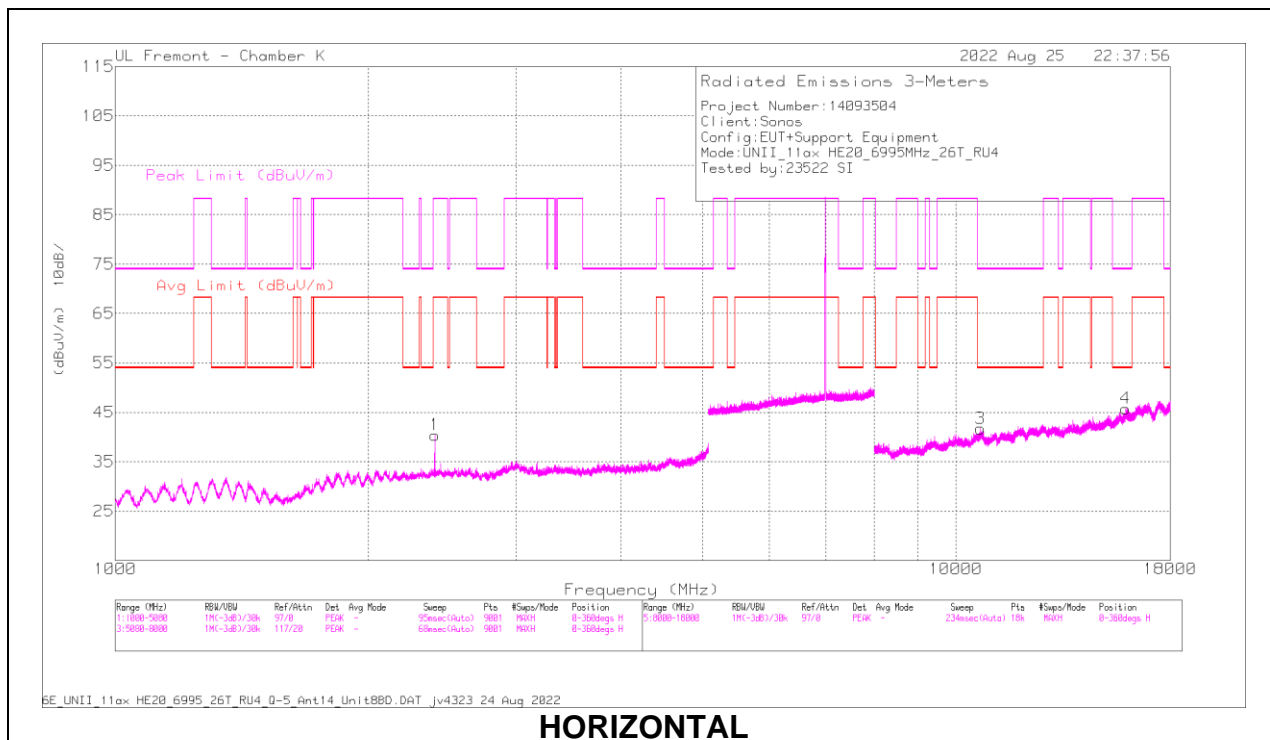

HORIZONTAL

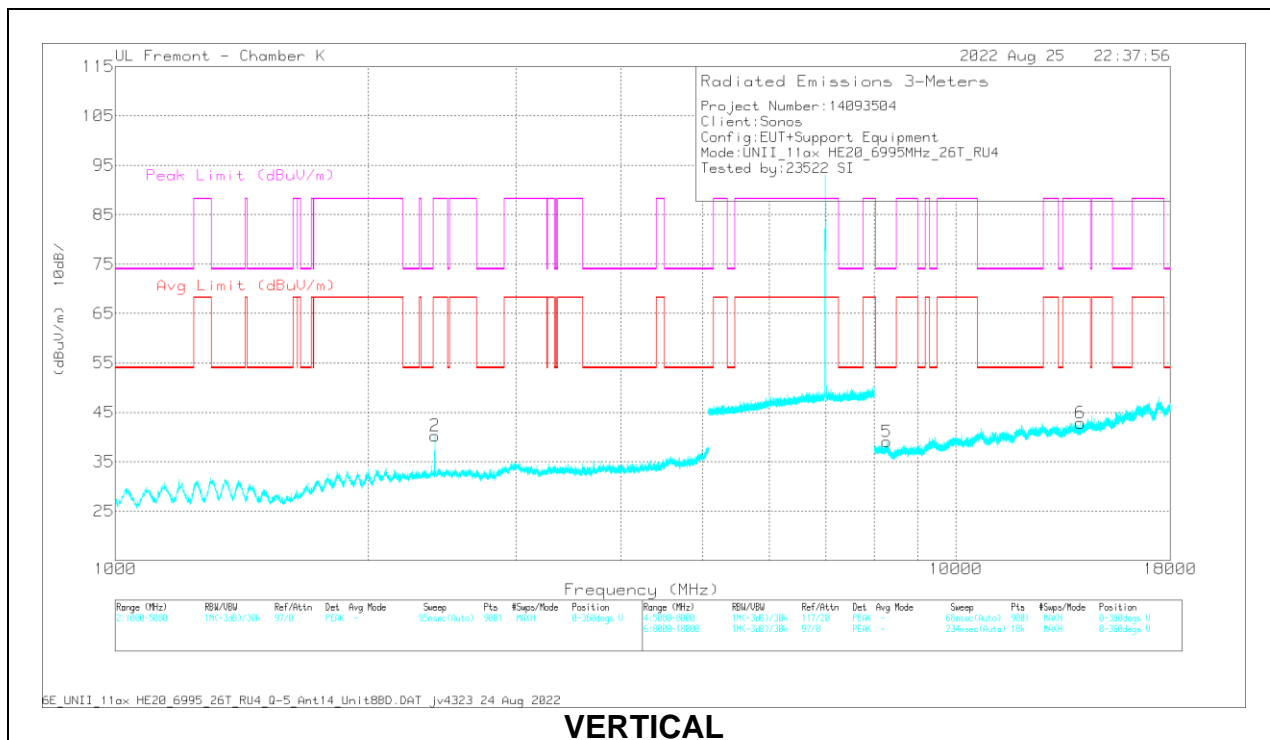

VERTICAL