


VERTICAL RESULT

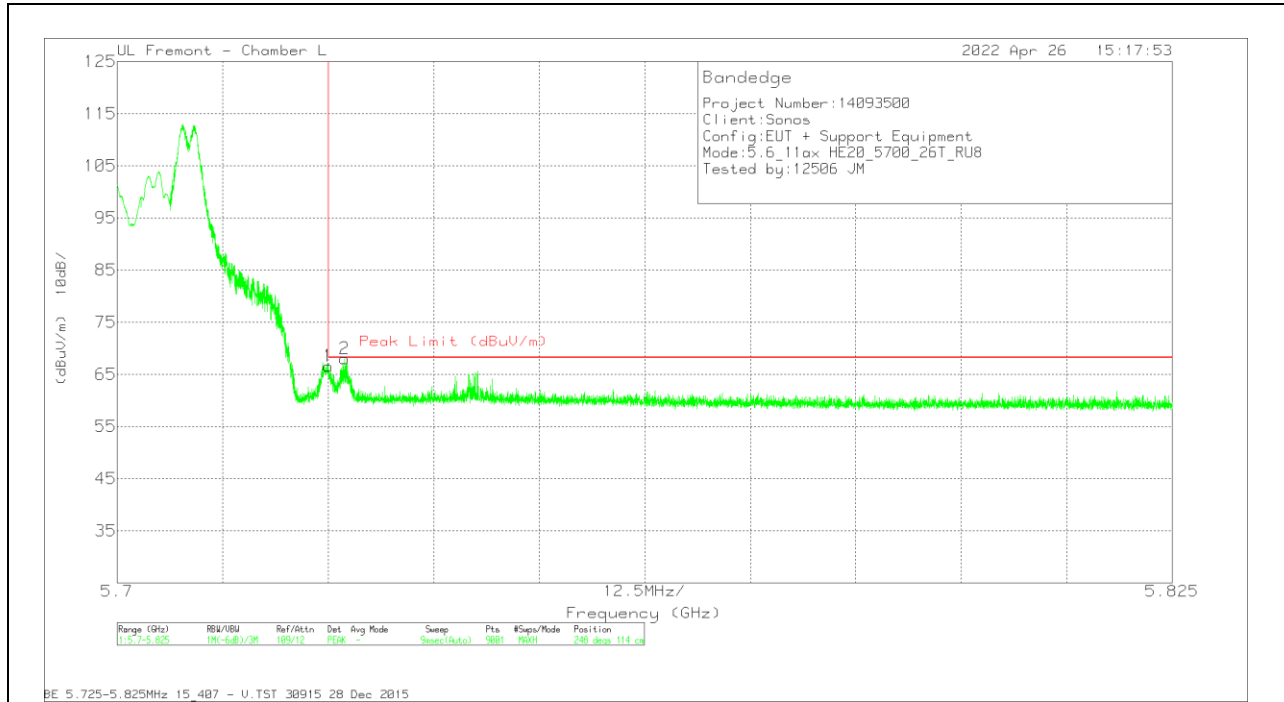


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	38.39	Pk	34.8	-6.6	66.59	68.2	-1.61	248	114	V
2	5.726959	39.7	Pk	34.8	-6.5	68	68.2	-2	248	114	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

HIGH CHANNEL

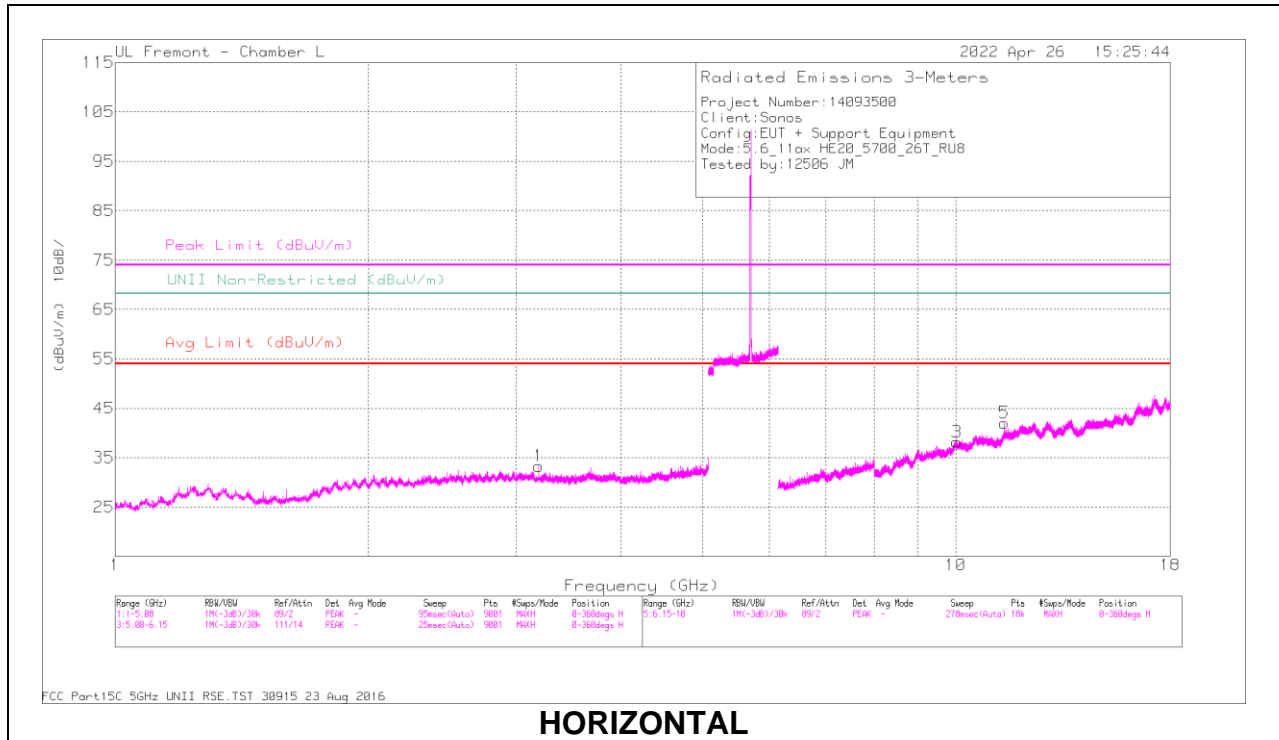

HORIZONTAL

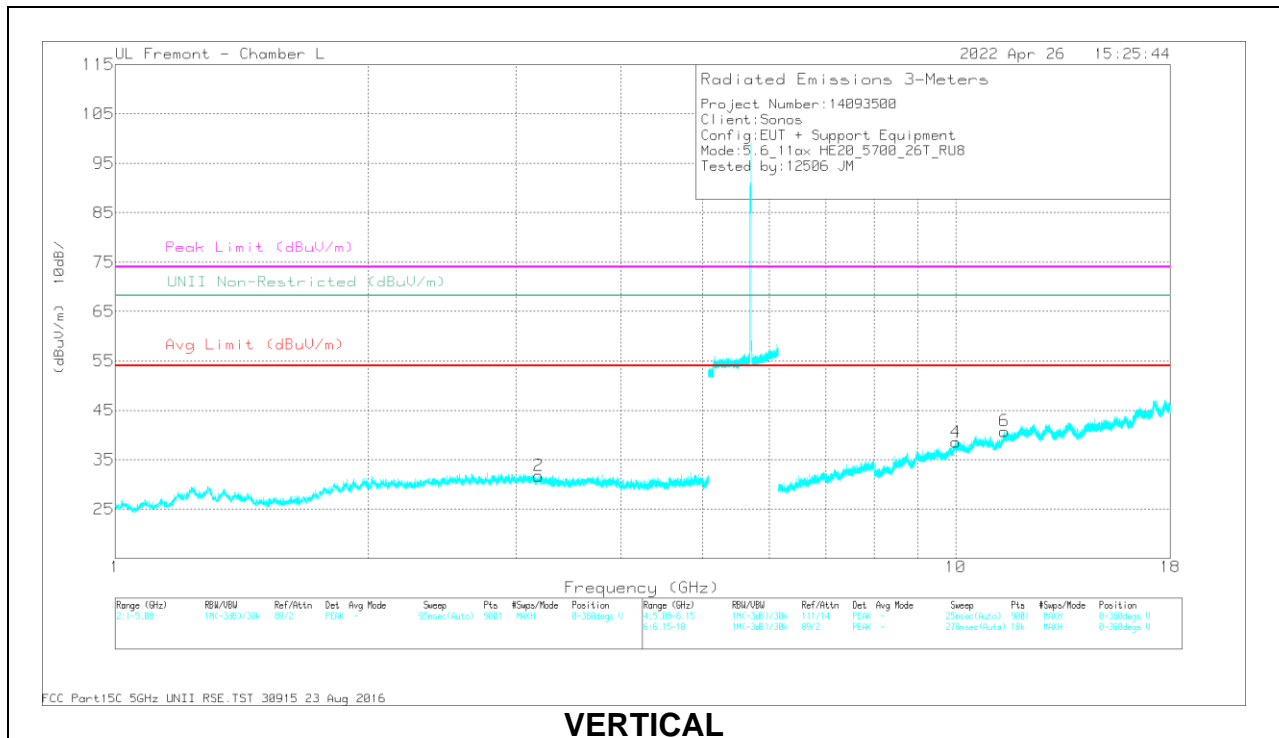

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.190737	37.38	PK-U	32.9	-29.1	0	41.18	-	-	-	-	68.2	-27.02	168	133	H
2	3.191296	37.62	PK-U	32.9	-29.1	0	41.42	-	-	-	-	68.2	-26.78	333	139	V
5	* 11.416791	34.3	PK-U	38.4	-19.1	0	53.6	-	-	74	-20.4	-	-	51	196	H
	* 11.416922	20.75	ADR	38.4	-19.1	2.02	42.07	54	-11.93	-	-	-	-	51	196	H
3	10.029831	29.89	PK-U	37.1	-19.7	0	47.29	-	-	-	-	68.2	-20.91	295	135	H
6	* 11.416623	35.5	PK-U	38.4	-19.1	0	54.8	-	-	74	-19.2	-	-	128	110	V
	* 11.416411	21.46	ADR	38.4	-19.1	2.02	42.78	54	-11.22	-	-	-	-	128	110	V
4	9.999362	30.22	PK-U	37.1	-19.2	0	48.12	-	-	-	-	68.2	-20.08	285	131	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 2 + Antenna 4 OFDMA MODE: 242-Tones, RU Index 61

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

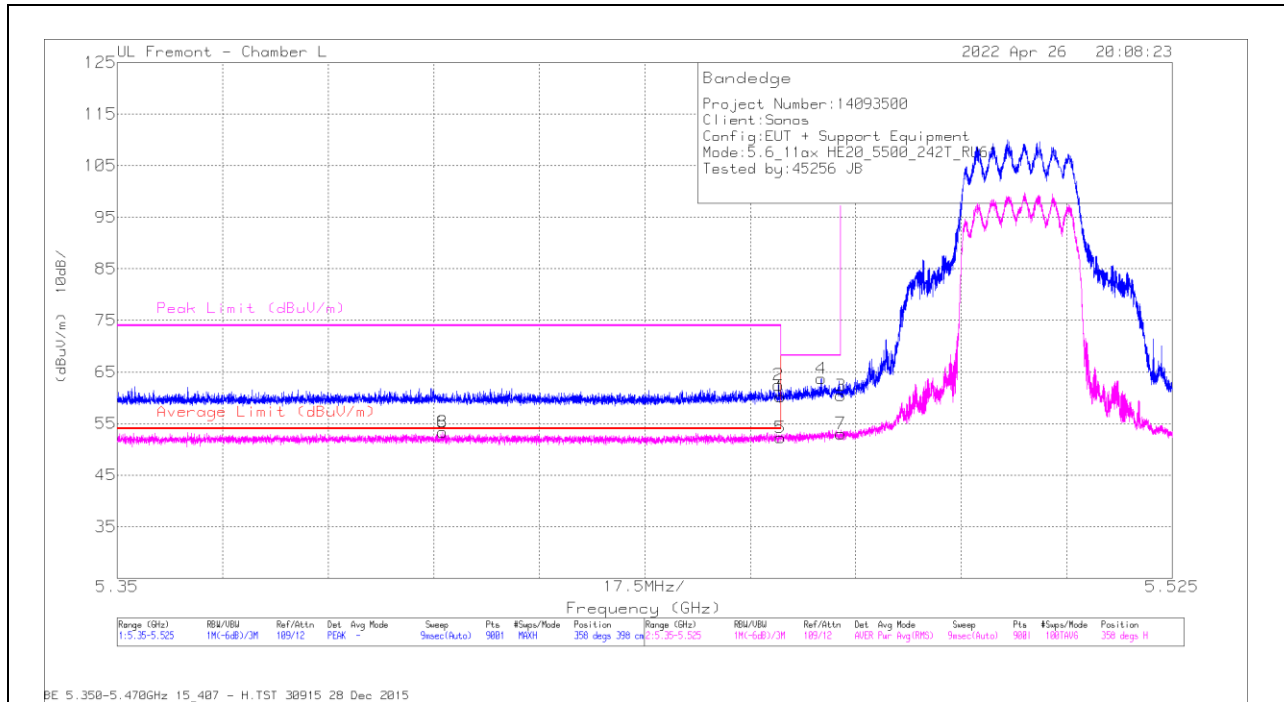

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	32.29	Pk	34.9	-7	0	60.19	-	-	68.2	-8.01	358	398	H
2	* 5.459684	34.55	Pk	34.9	-7	0	62.45	-	-	74	-11.55	358	398	H
3	5.47	32.51	Pk	34.9	-7	0	60.41	-	-	68.2	-7.79	358	398	H
4	5.466781	35.81	Pk	34.9	-7	0	63.71	-	-	68.2	-4.49	358	398	H
5	* 5.46	21.46	RMS	34.9	-7	2.91	52.27	54	-1.73	-	-	358	398	H
6	* 5.403957	22.42	RMS	34.9	-6.9	2.91	53.33	54	-0.67	-	-	358	398	H
7	5.47	22.21	RMS	34.9	-7	2.91	53.02	-	-	-	-	358	398	H
8	* 5.403957	22.42	RMS	34.9	-6.9	2.91	53.33	54	-0.67	-	-	358	398	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

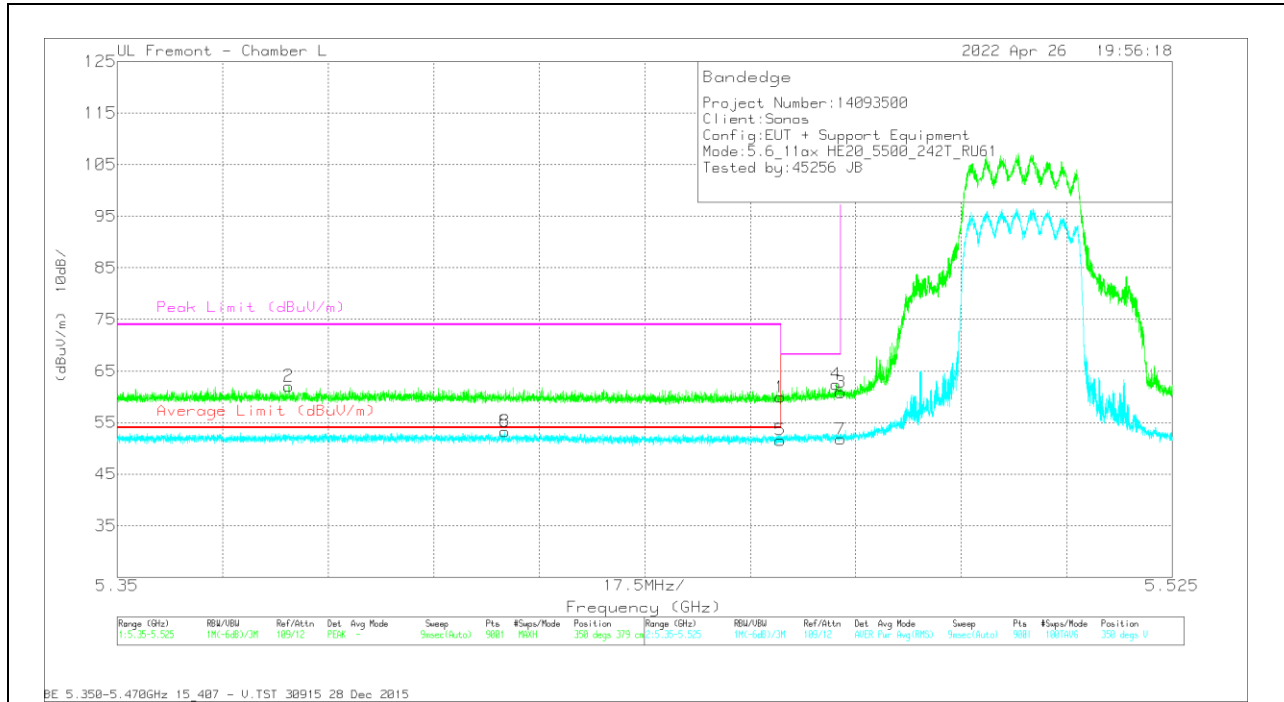

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	32.03	Pk	34.9	-7	0	59.93	-	-	-	-8.27	350	379	V
2	* 5.378466	34.25	Pk	34.9	-7.1	0	62.05	-	-	74	-11.95	350	379	V
3	5.47	32.96	Pk	34.9	-7	0	60.86	-	-	68.2	-7.34	350	379	V
4	5.469231	34.52	Pk	34.9	-7	0	62.42	-	-	68.2	-5.78	350	379	V
5	* 5.46	20.78	RMS	34.9	-7	2.91	51.59	54	-2.41	-	-	350	379	V
6	* 5.414301	22.48	RMS	34.9	-7	2.91	53.29	54	-0.71	-	-	350	379	V
7	5.47	20.96	RMS	34.9	-7	2.91	51.77	-	-	-	-	350	379	V
8	* 5.414301	22.48	RMS	34.9	-7	2.91	53.29	54	-0.71	-	-	350	379	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

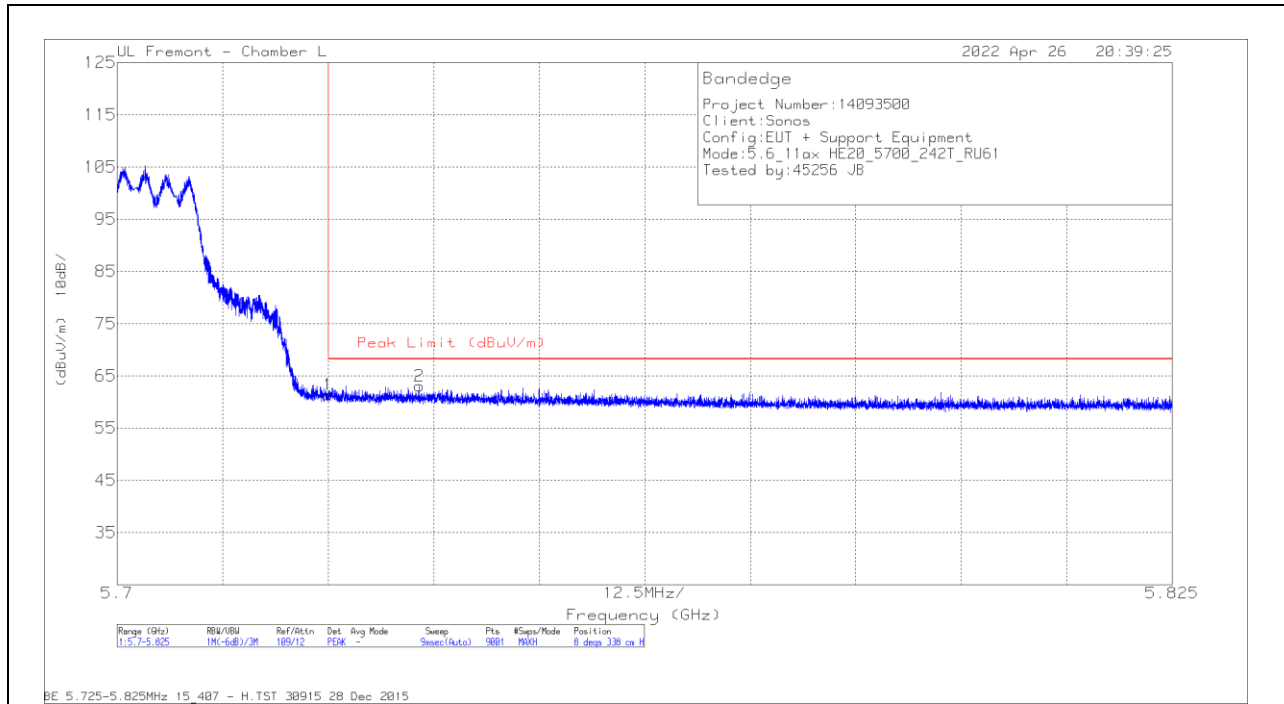


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	33.15	Pk	34.8	-6.6	61.35	68.2	-6.85	8	338	H
2	5.735792	34.73	Pk	34.8	-6.5	63.03	68.2	-5.17	8	338	H

Pk - Peak detector

VERTICAL RESULT

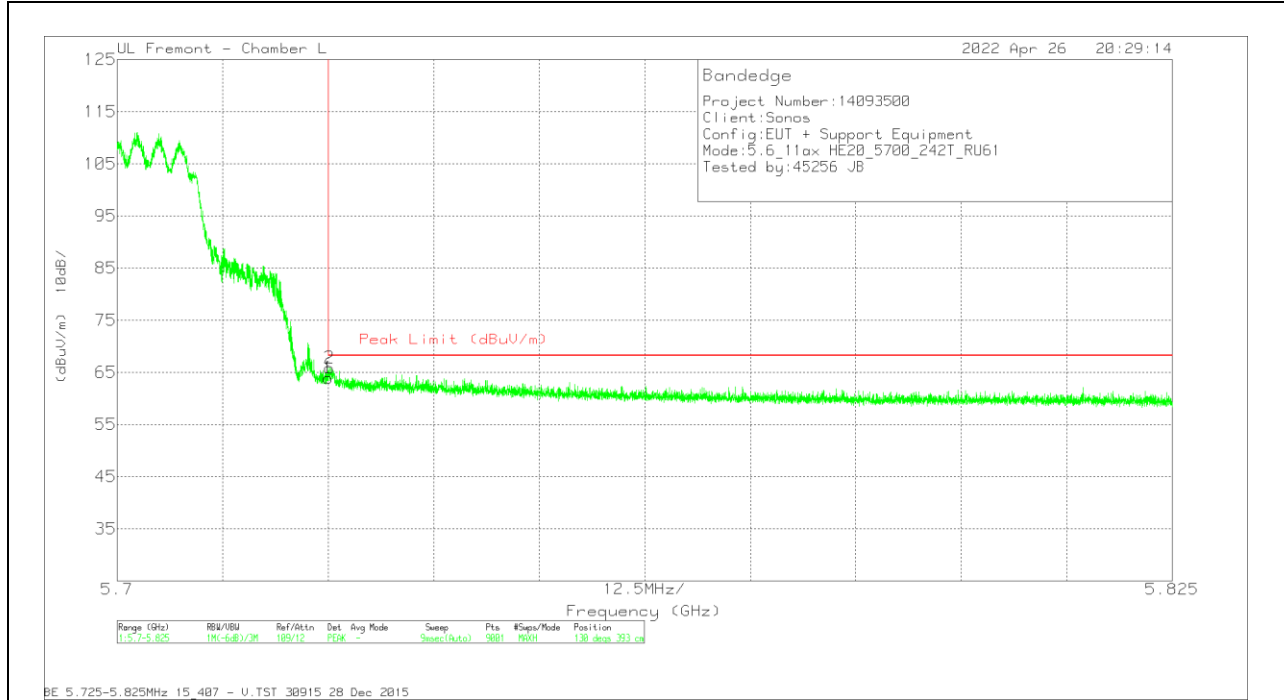


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	35.7	Pk	34.8	-6.6	63.9	68.2	-4.3	130	393	V
2	5.725167	37.55	Pk	34.8	-6.5	65.85	68.2	-2.35	130	393	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

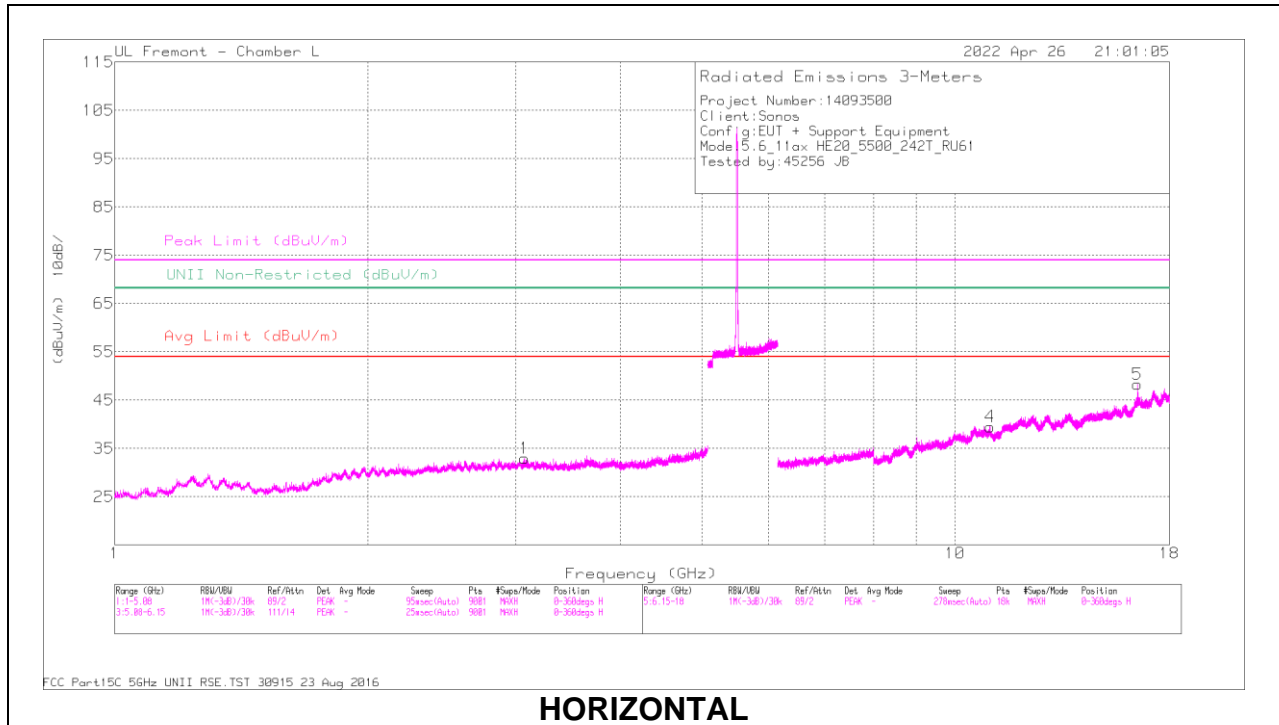

HORIZONTAL

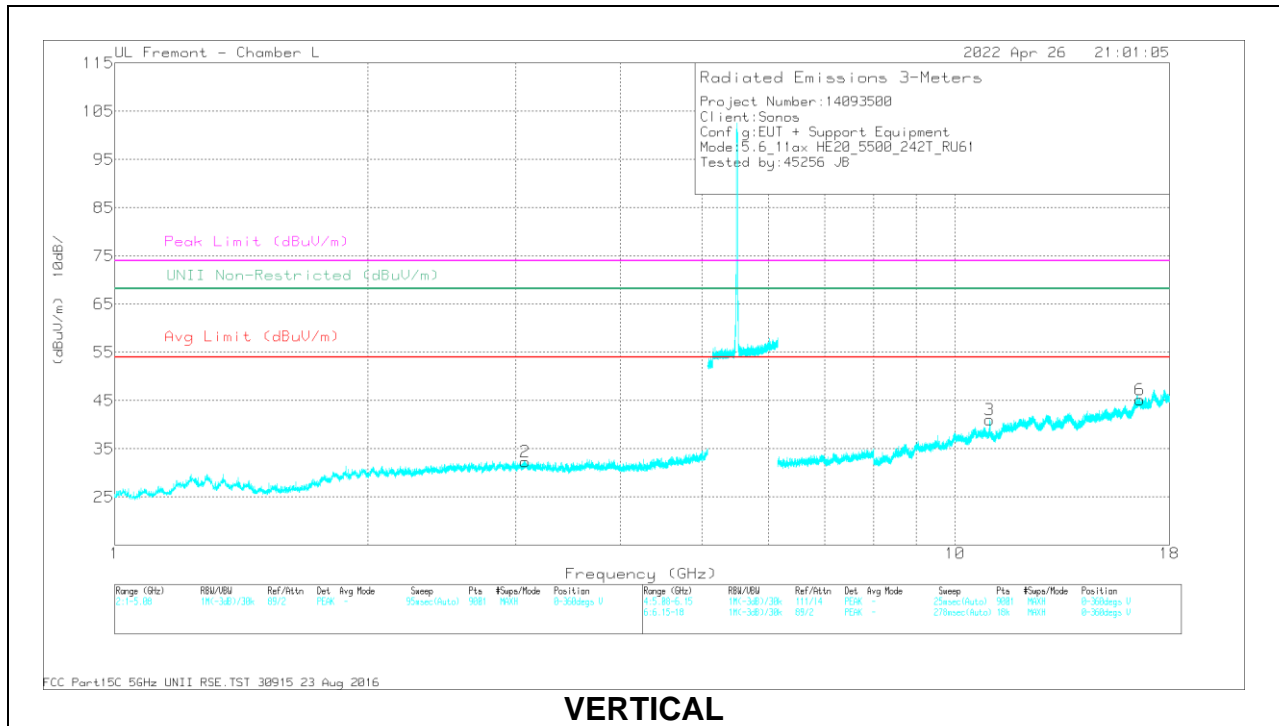

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.071364	38.59	PK-U	33	-28.9	0	42.69	-	-	-	-	68.2	-25.51	191	102	H
2	3.077924	38.78	PK-U	32.9	-28.9	0	42.78	-	-	-	-	68.2	-25.42	171	389	V
5	16.500521	38.47	PK-U	41	-17.5	0	61.97	-	-	-	-	68.2	-6.23	41	116	H
4	* 11.006292	32.29	PK-U	37.6	-18.8	0	51.09	-	-	74	-22.91	-	-	265	103	H
	* 11.005908	19.72	ADR	37.6	-18.8	2.91	41.43	54	-12.57	-	-	-	-	265	103	H
6	16.593854	31.47	PK-U	41.2	-17.3	0	55.37	-	-	-	-	68.2	-12.83	69	135	V
3	* 10.998598	34.42	PK-U	37.6	-18.9	0	53.12	-	-	74	-20.88	-	-	124	102	V
	* 10.998354	20.35	ADR	37.6	-18.9	2.91	41.96	54	-12.04	-	-	-	-	124	102	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL

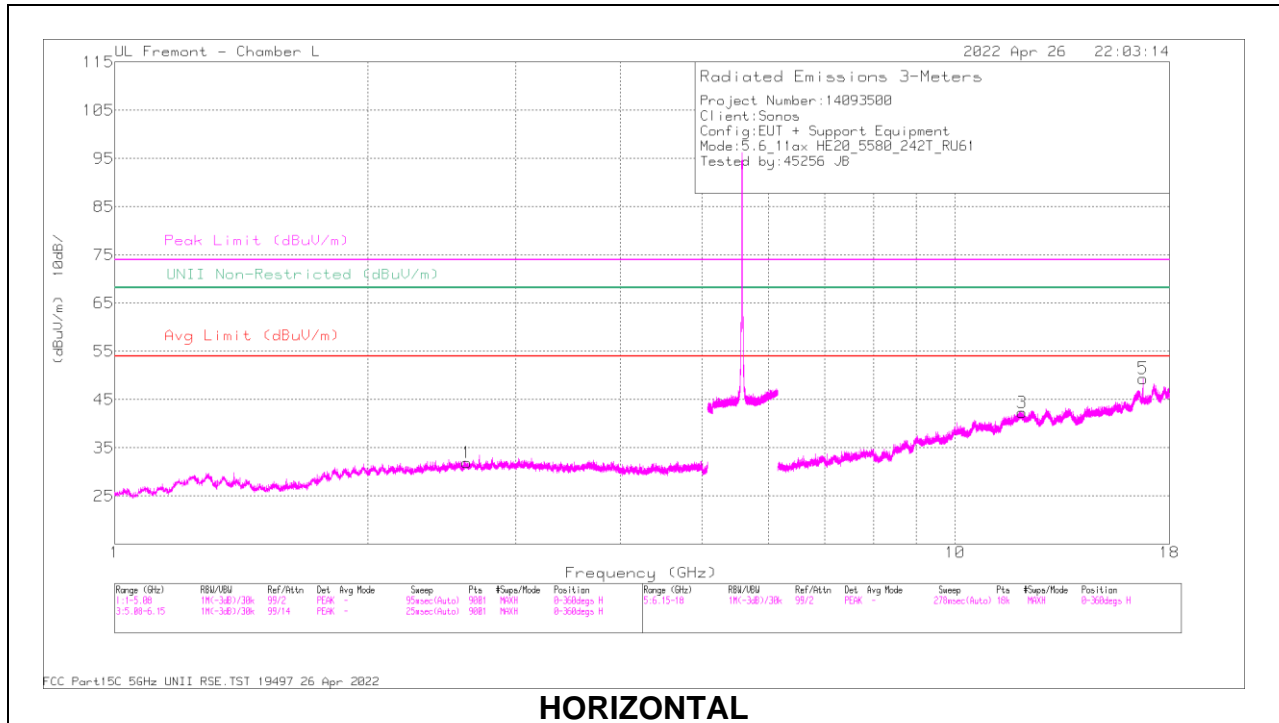

HORIZONTAL

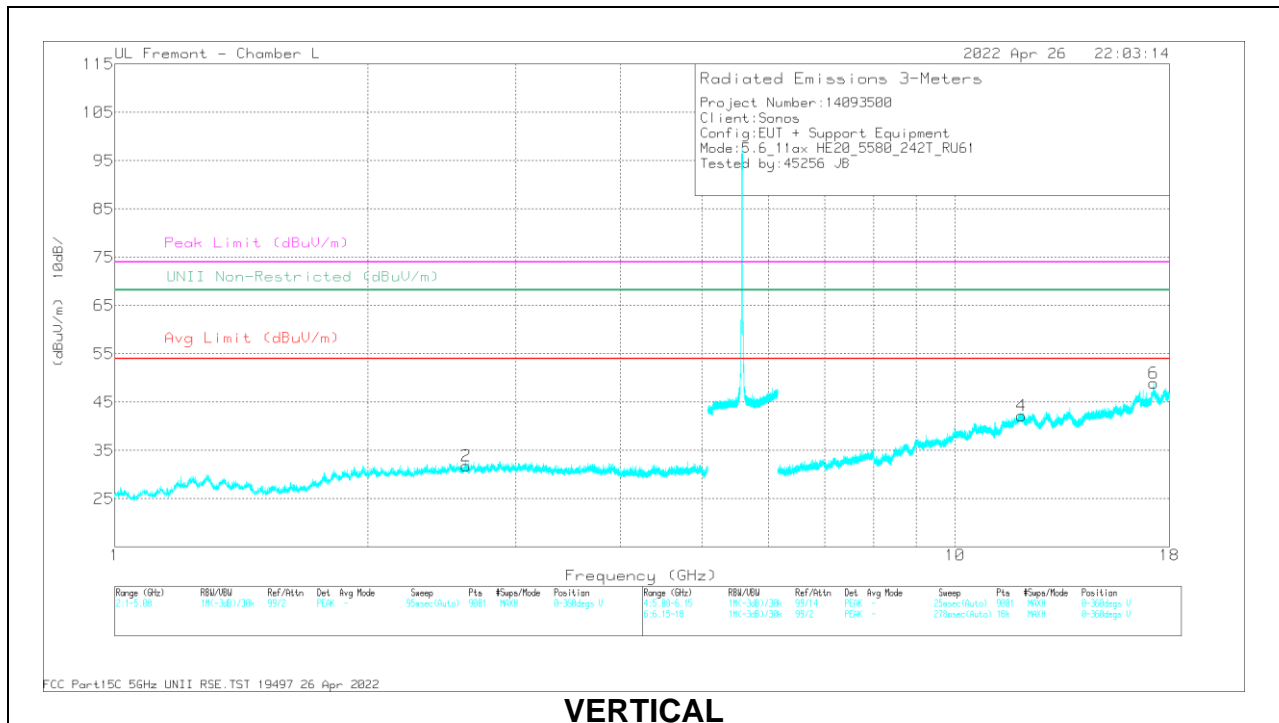

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.625883	39.03	PK-U	32.4	-29.8	0	41.63	-	-	-	-	68.2	-26.57	147	205	H
2	2.620799	38.93	PK-U	32.4	-29.8	0	41.53	-	-	-	-	68.2	-26.67	188	196	V
5	16.735595	39.71	PK-U	41.2	-16.7	0	64.21	-	-	-	-	68.2	-3.99	39	106	H
3	* 12.0155	30.79	PK-U	39.1	-19.2	0	50.69	-	-	74	-23.31	-	-	47	177	H
	* 12.016123	18.97	ADR	39.1	-19.2	2.91	41.78	54	-12.22	-	-	-	-	47	177	H
6	17.24979	31.43	PK-U	41	-15.9	0	56.53	-	-	-	-	68.2	-11.67	220	146	V
4	* 11.999847	31.31	PK-U	39.2	-19.1	0	51.41	-	-	74	-22.59	-	-	104	179	V
	* 11.999747	19.21	ADR	39.2	-19.1	2.91	42.22	54	-11.78	-	-	-	-	104	179	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL

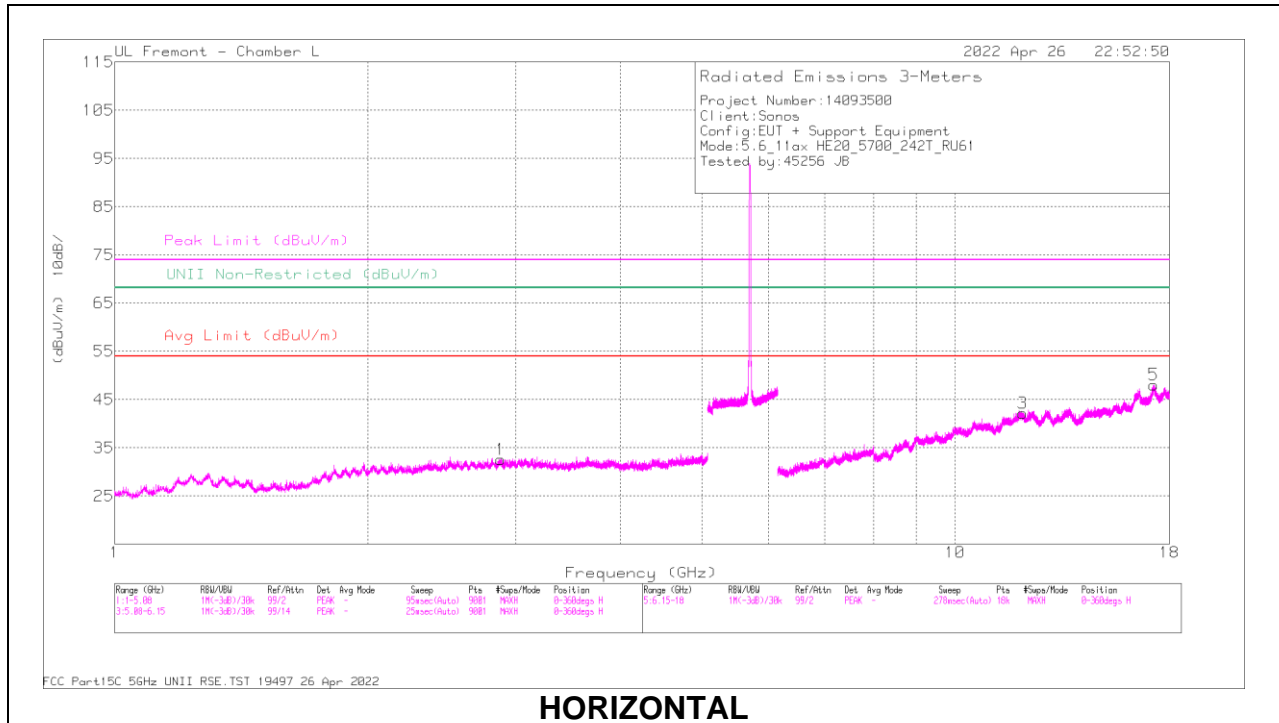

HORIZONTAL

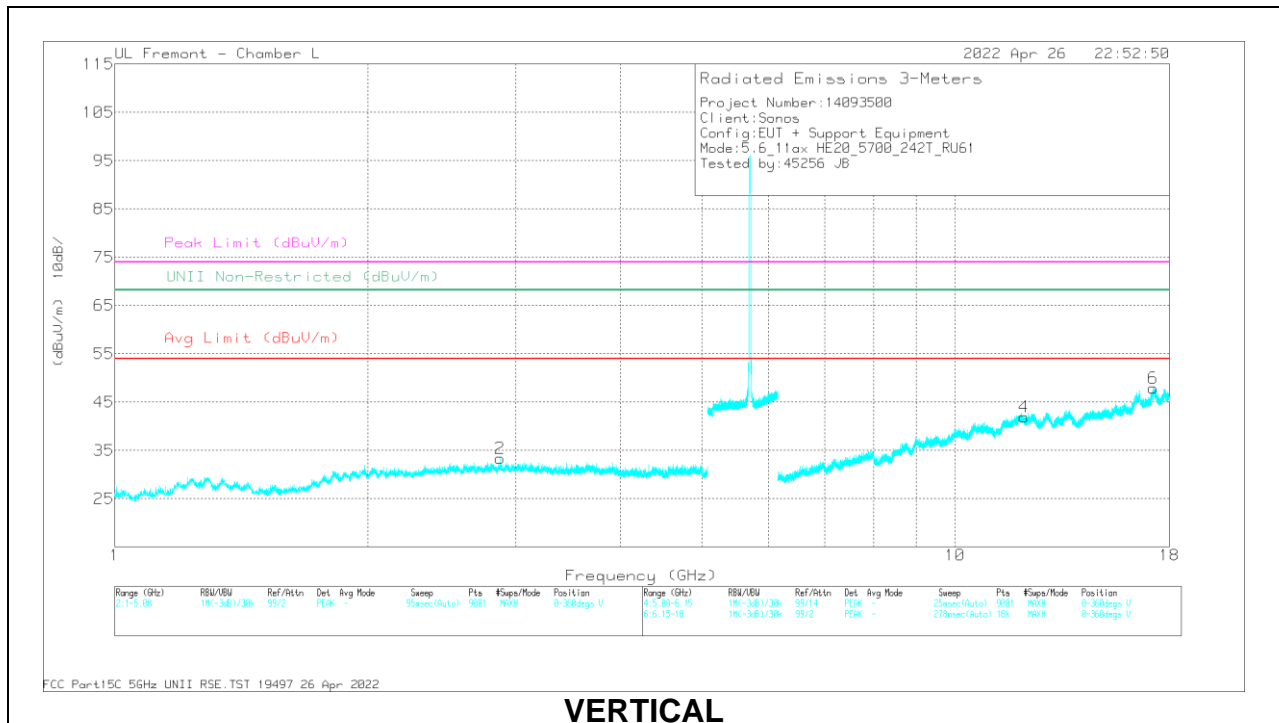

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.877663	39.73	PK-U	32.8	-29.3	0	43.23	-	-	74	-30.77	-	-	115	109	H
	* 2.878562	27.24	ADR	32.8	-29.3	2.91	33.65	54	-20.35	-	-	-	-	115	109	H
2	* 2.878577	39.04	PK-U	32.8	-29.3	0	42.54	-	-	74	-31.46	-	-	69	114	V
	* 2.878309	27.55	ADR	32.8	-29.3	2.91	33.96	54	-20.04	-	-	-	-	69	114	V
5	17.245936	31.54	PK-U	40.9	-15.8	0	56.64	-	-	-	-	68.2	-11.56	262	170	H
3	* 12.036298	30.71	PK-U	39.2	-19.3	0	50.61	-	-	74	-23.39	-	-	87	116	H
	* 12.037952	19.16	ADR	39.2	-19.3	2.91	41.97	54	-12.03	-	-	-	-	87	116	H
6	17.201868	31.46	PK-U	40.9	-16.3	0	56.06	-	-	-	-	68.2	-12.14	91	171	V
4	* 12.076659	31.23	PK-U	39.1	-19.4	0	50.93	-	-	74	-23.07	-	-	256	152	V
	* 12.075968	19.47	ADR	39.1	-19.4	2.91	42.08	54	-11.92	-	-	-	-	256	152	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.8. TX ABOVE 1 GHz 802.11ax HE40 MODE IN THE 5.6GHz BAND

2TX Antenna 2 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 0

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

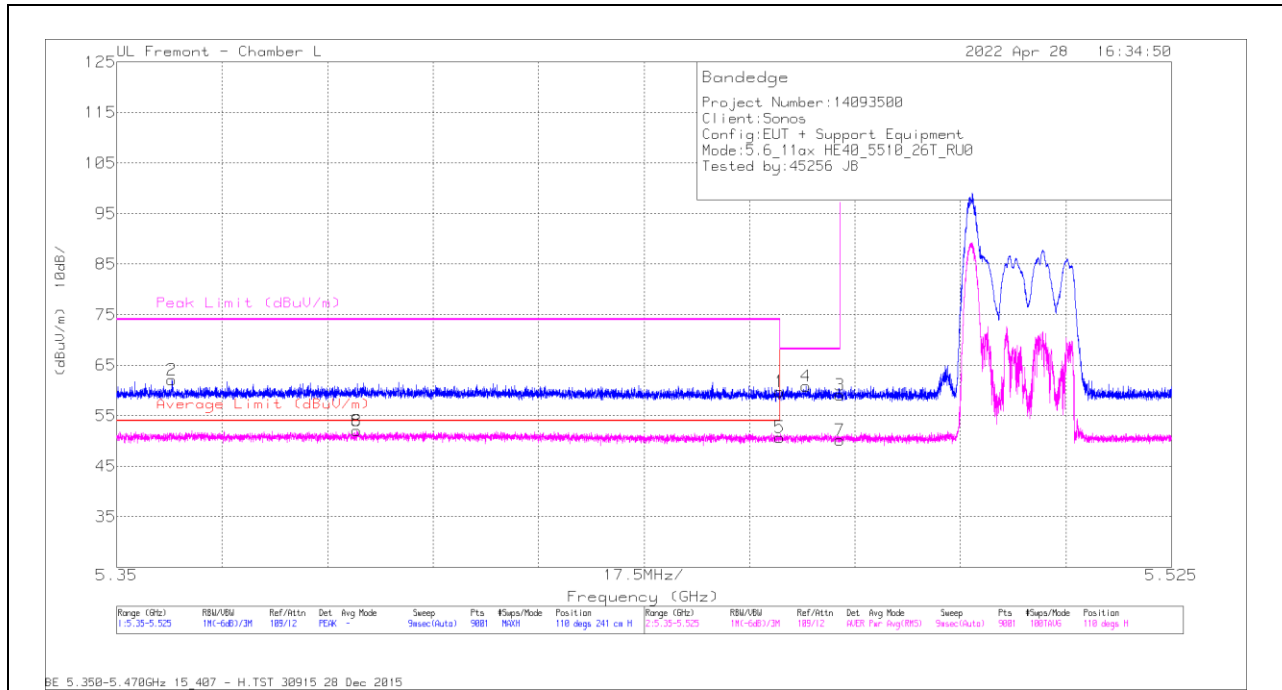

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	31.88	Pk	34.9	-7	0	59.78	-	-	68.2	-8.42	110	241	H
2	* 5.359178	34.14	Pk	34.9	-7	0	62.04	-	-	74	-11.96	110	241	H
3	5.47	31.2	Pk	34.9	-7	0	59.1	-	-	68.2	-9.1	110	241	H
4	5.46435	32.95	Pk	34.9	-7	0	60.85	-	-	68.2	-7.35	110	241	H
5	* 5.46	20.82	RMS	34.9	-7	2	50.72	54	-3.28	-	-	110	241	H
6	* 5.389821	22.13	RMS	34.9	-7	2	52.03	54	-1.97	-	-	110	241	H
7	5.47	20.32	RMS	34.9	-7	2	50.22	-	-	-	-	110	241	H
8	* 5.389821	22.13	RMS	34.9	-7	2	52.03	54	-1.97	-	-	110	241	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

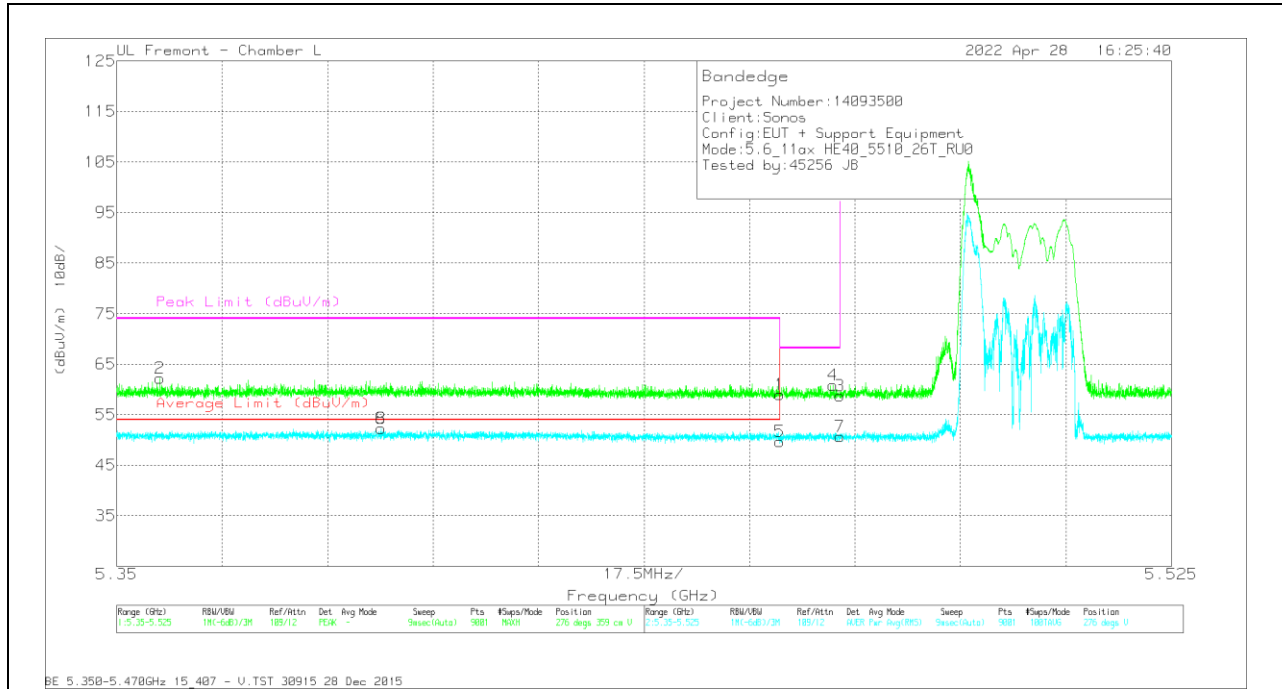

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	31.08	Pk	34.9	-7	0	58.98	-	-	68.2	-9.22	276	359	V
2	* 5.357175	34.26	Pk	34.9	-7	0	62.16	-	-	74	-11.84	276	359	V
3	5.47	30.86	Pk	34.9	-7	0	58.76	-	-	68.2	-9.44	276	359	V
4	5.468822	32.92	Pk	34.9	-7	0	60.82	-	-	68.2	-7.38	276	359	V
5	* 5.46	19.77	RMS	34.9	-7	2	49.67	54	-4.33	-	-	276	359	V
6	* 5.393827	22.39	RMS	34.9	-7	2	52.29	54	-1.71	-	-	276	359	V
7	5.47	20.8	RMS	34.9	-7	2	50.7	-	-	-	-	276	359	V
8	* 5.393827	22.39	RMS	34.9	-7	2	52.29	54	-1.71	-	-	276	359	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

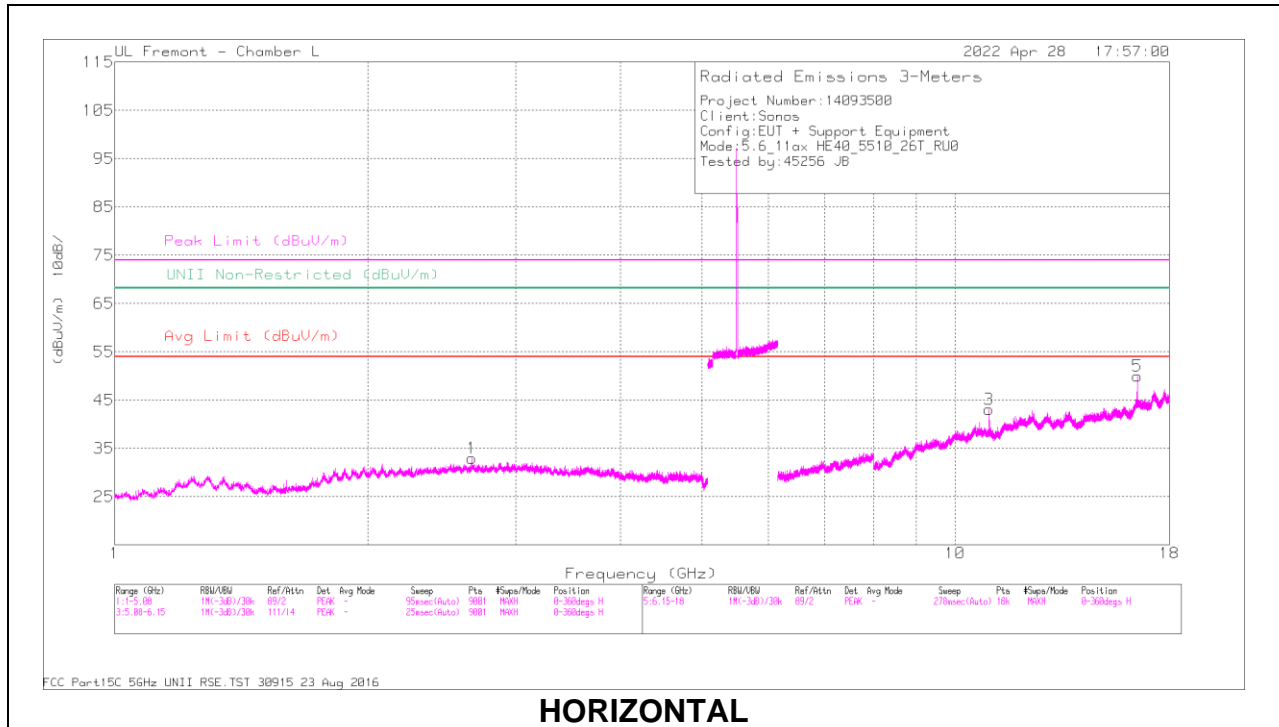

HORIZONTAL

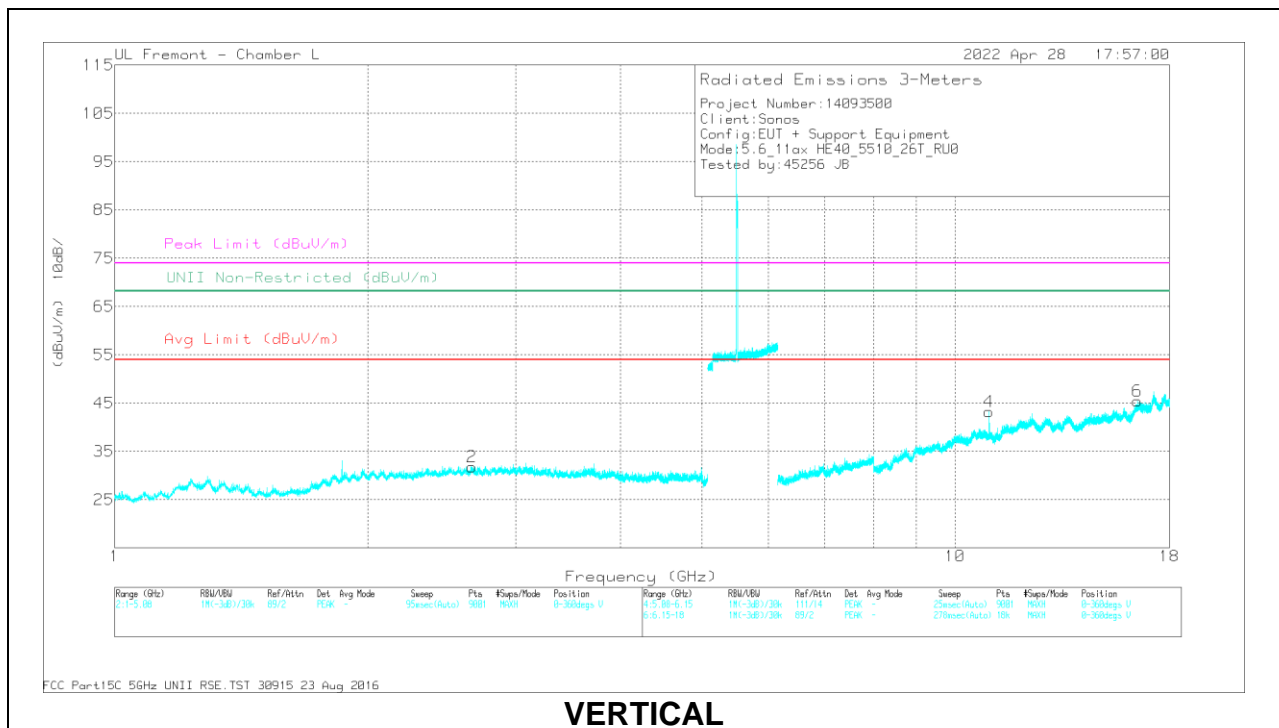

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.66288	38.95	PK-U	32.6	-29.9	0	41.65	-	-	74	-32.35	-	-	329	184	H
	* 2.66125	27.38	ADR	32.6	-29.9	2	32.08	54	-21.92	-	-	-	-	329	184	H
2	* 2.661442	39.88	PK-U	32.6	-29.9	0	42.58	-	-	74	-31.42	-	-	332	114	V
	* 2.658613	27.96	ADR	32.6	-29.9	2	32.66	54	-21.34	-	-	-	-	332	114	V
5	16.475514	44.2	PK-U	40.9	-17.6	0	67.5	-	-	-	-	68.2	-7	39	168	H
3	* 10.984386	40.36	PK-U	37.6	-19	0	58.96	-	-	74	-15.04	-	-	197	172	H
	* 10.983799	24.75	ADR	37.6	-19.1	2	45.25	54	-8.75	-	-	-	-	197	172	H
6	16.475827	40.85	PK-U	40.9	-17.6	0	64.15	-	-	-	-	68.2	-4.05	102	197	V
4	* 10.983092	40.46	PK-U	37.7	-19.1	0	59.06	-	-	74	-14.94	-	-	125	101	V
	* 10.983907	23.53	ADR	37.6	-19.1	2	44.03	54	-9.97	-	-	-	-	125	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 2 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 8

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL

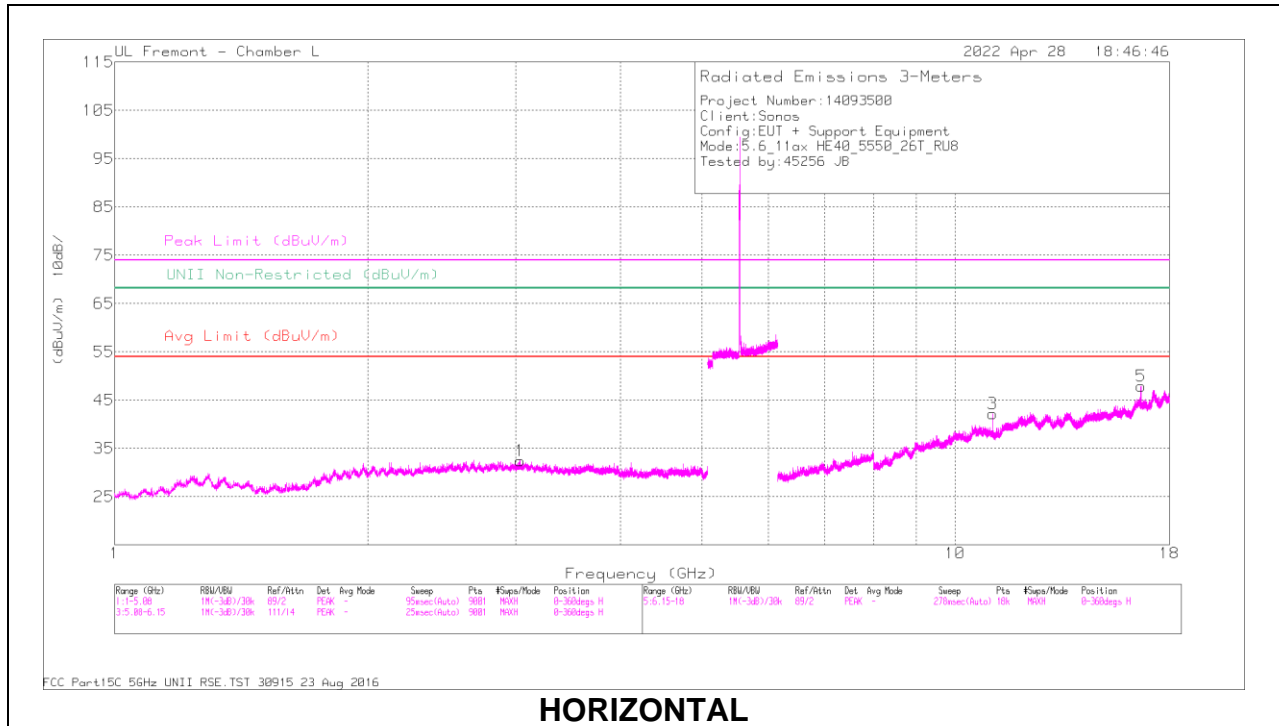

HORIZONTAL

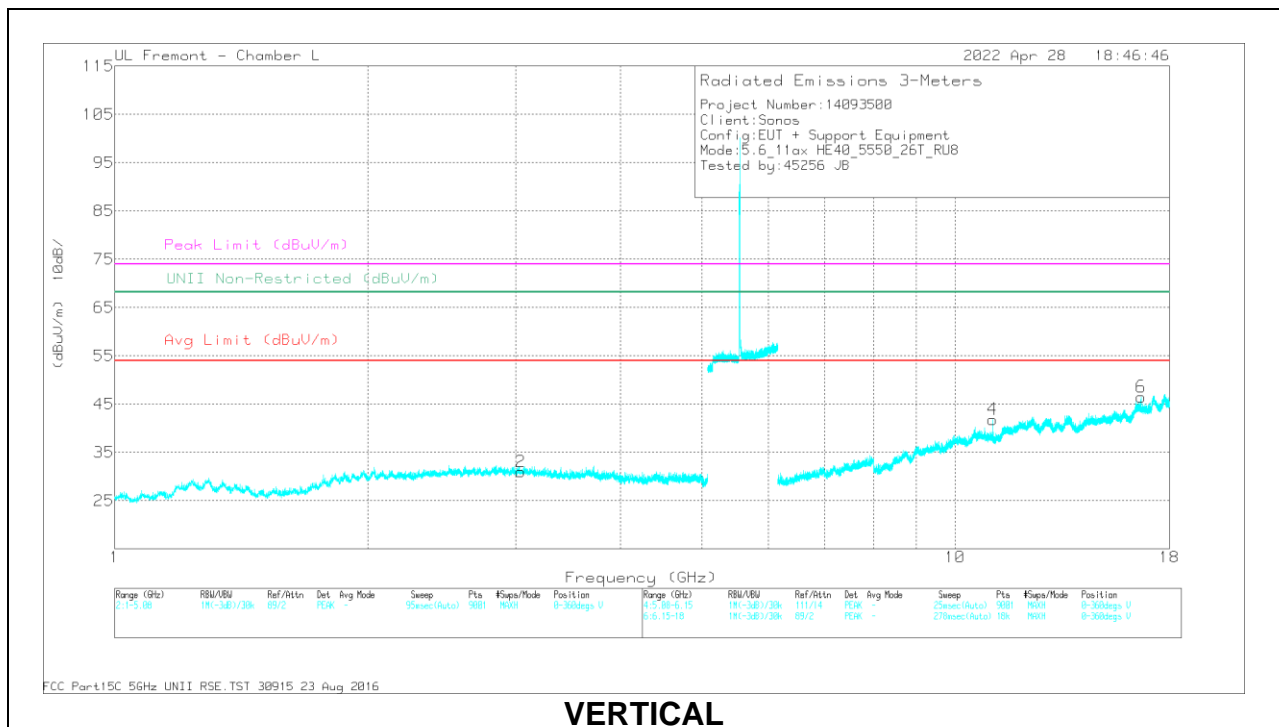

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.034646	38.49	PK-U	32.9	-29	0	42.39	-	-	-	-	68.2	-25.81	226	104	H
2	3.043803	38.54	PK-U	32.9	-28.9	0	42.54	-	-	-	-	68.2	-25.66	143	109	V
5	16.647719	30.04	PK-U	41.2	-17.1	0	54.14	-	-	-	-	68.2	-14.06	38	188	H
3	* 11.096837	29.46	PK-U	37.7	-19.1	0	48.06	-	-	74	-25.94	-	-	291	138	H
	* 11.097397	17.67	ADR	37.7	-19.1	2	38.27	54	-15.73	-	-	-	-	291	138	H
6	16.649005	30.33	PK-U	41.2	-17	0	54.53	-	-	-	-	68.2	-13.67	30	120	V
4	* 11.09745	29.21	PK-U	37.7	-19.1	0	47.81	-	-	74	-26.19	-	-	298	181	V
	* 11.095484	17.69	ADR	37.7	-19.1	2	38.29	54	-15.71	-	-	-	-	298	181	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 2 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 17

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

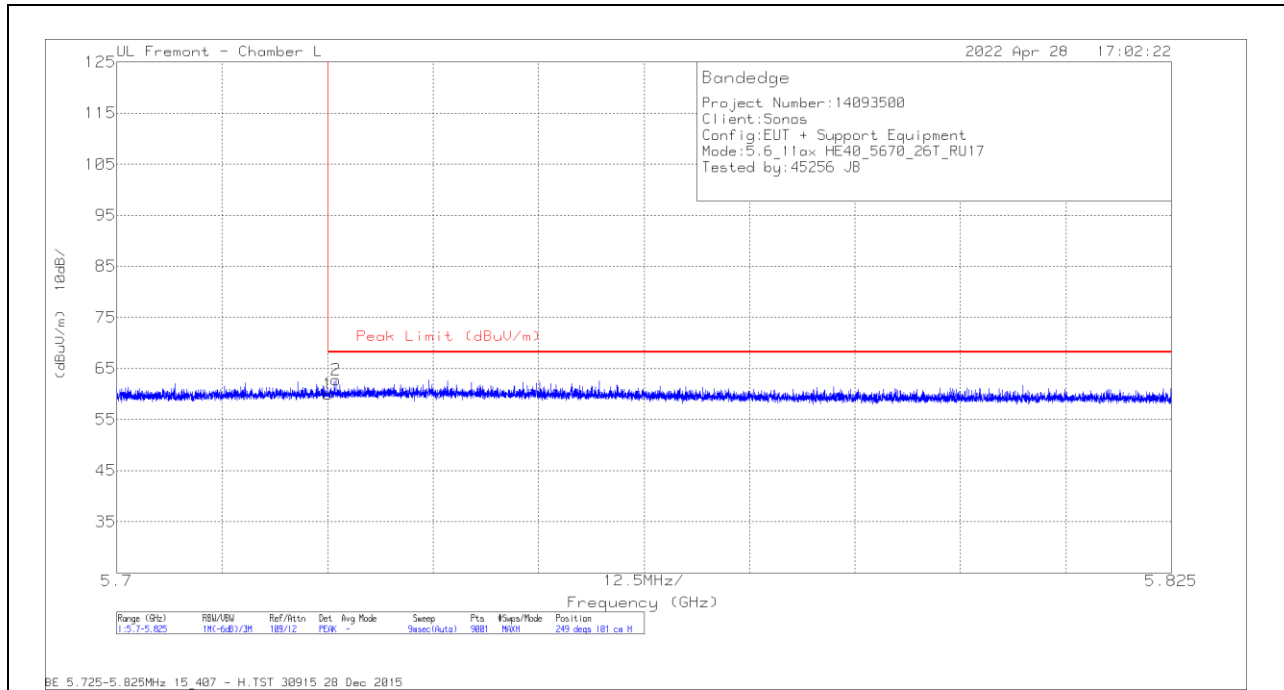


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	31.72	Pk	34.8	-6.6	59.92	68.2	-8.28	249	101	H
2	5.725986	34.51	Pk	34.8	-6.5	62.81	68.2	-5.39	249	101	H

Pk - Peak detector

VERTICAL RESULT

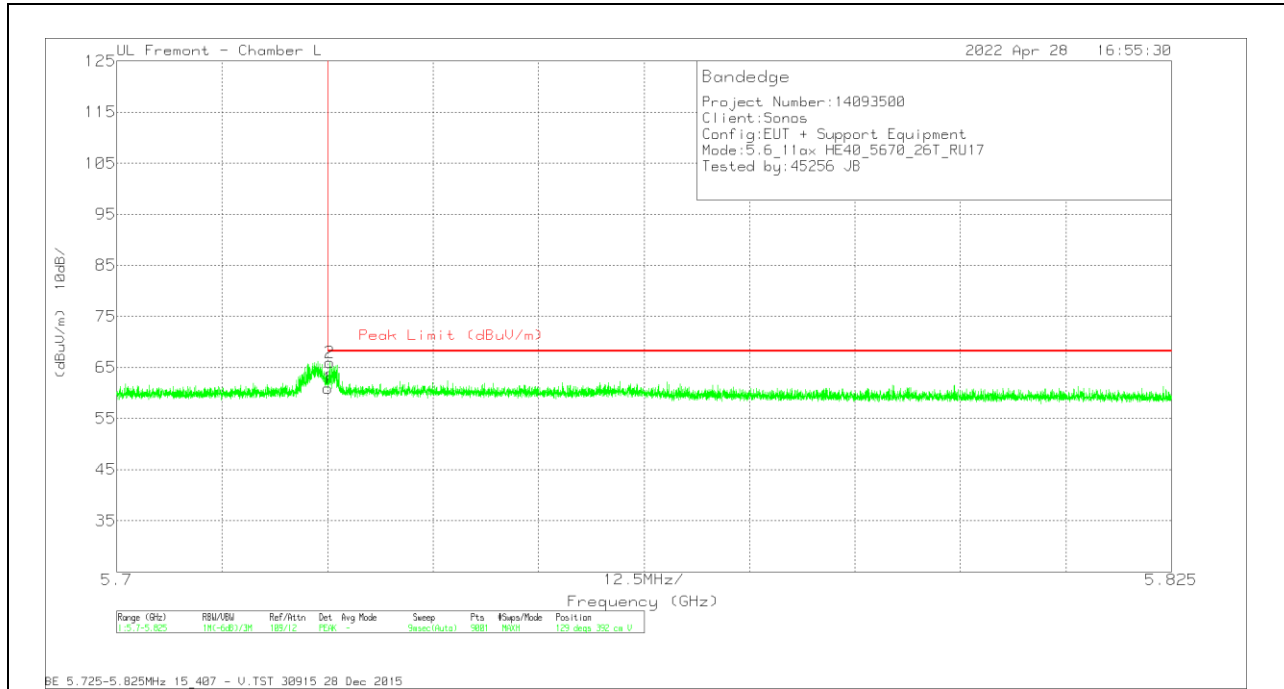


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	32.7	Pk	34.8	-6.6	60.9	68.2	-7.3	129	392	V
2	5.725278	37.69	Pk	34.8	-6.5	65.99	68.2	-2.21	129	392	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

HIGH CHANNEL

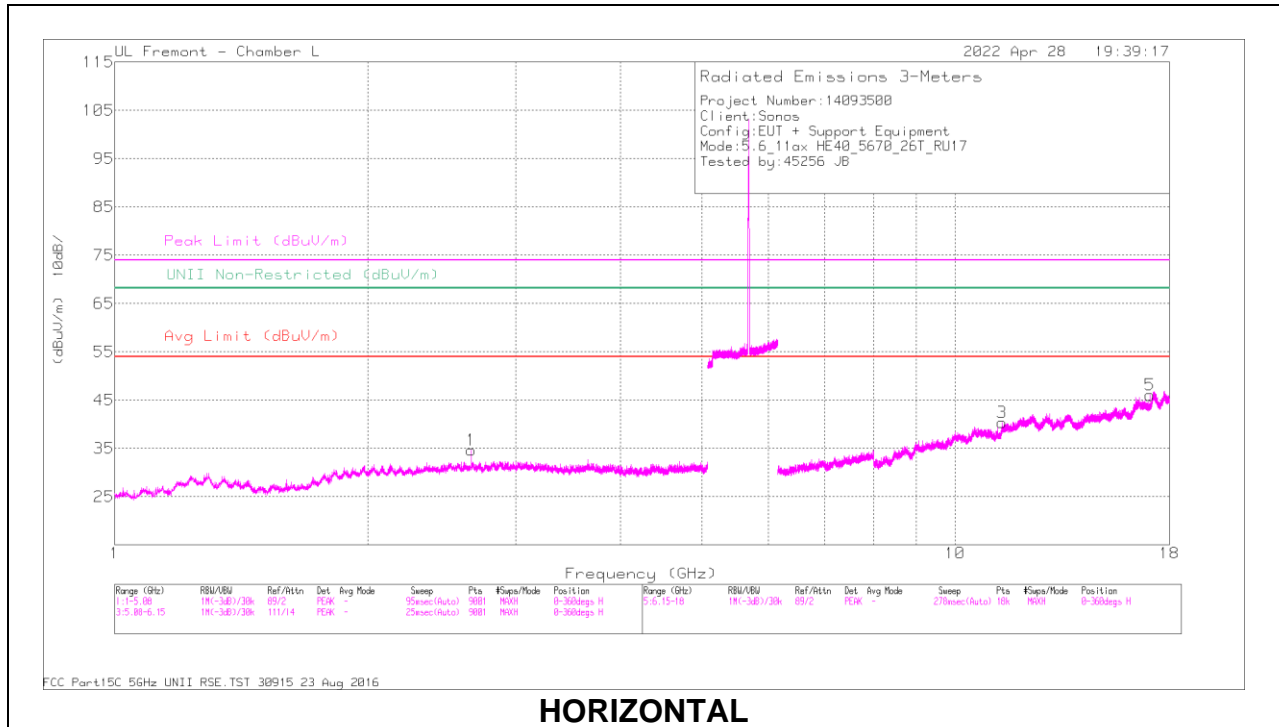

HORIZONTAL

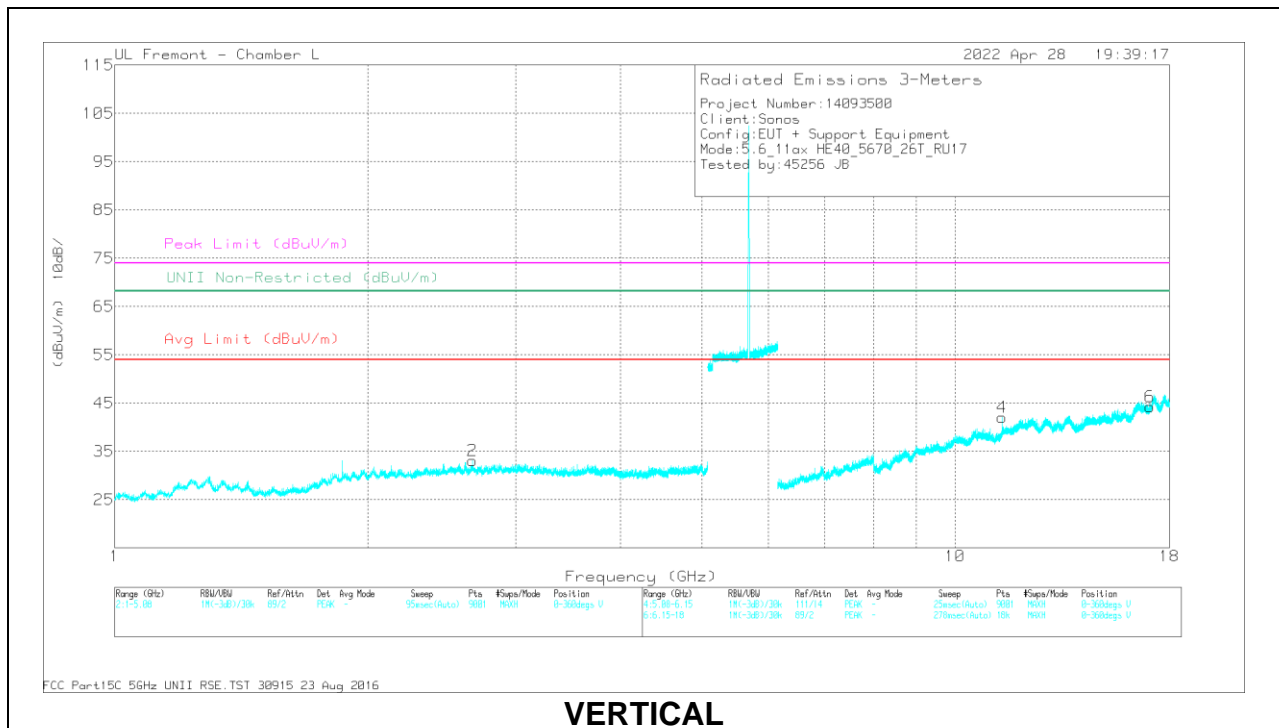

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.656775	39.17	PK-U	32.6	-29.9	0	41.87	-	-	74	-32.13	-	-	175	106	H
	* 2.656538	27.47	ADR	32.6	-29.9	2	32.17	54	-21.83	-	-	-	-	175	106	H
2	* 2.667517	39.75	PK-U	32.6	-29.9	0	42.45	-	-	74	-31.55	-	-	163	103	V
	* 2.667033	27.33	ADR	32.6	-29.9	2	32.03	54	-21.97	-	-	-	-	163	103	V
5	17.06438	43.66	PK-U	40.9	-16.9	0	67.66	-	-	-	-	68.2	-5.4	34	164	H
3	* 11.376125	34.65	PK-U	38.3	-18.9	0	54.05	-	-	74	-19.95	-	-	48	212	H
	* 11.376201	20.93	ADR	38.3	-18.9	2	42.33	54	-11.67	-	-	-	-	48	212	H
6	17.063231	38.63	PK-U	41	-16.9	0	62.73	-	-	-	-	68.2	-5.47	104	159	V
4	* 11.376687	35.64	PK-U	38.3	-18.9	0	55.04	-	-	74	-18.96	-	-	131	111	V
	* 11.376136	20.78	ADR	38.3	-18.9	2	42.18	54	-11.82	-	-	-	-	131	111	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 2 + Antenna 4 OFDMA MODE: 484-Tones, RU Index 65

BANDEGE (LOW CHANNEL)

HORIZONTAL RESULT

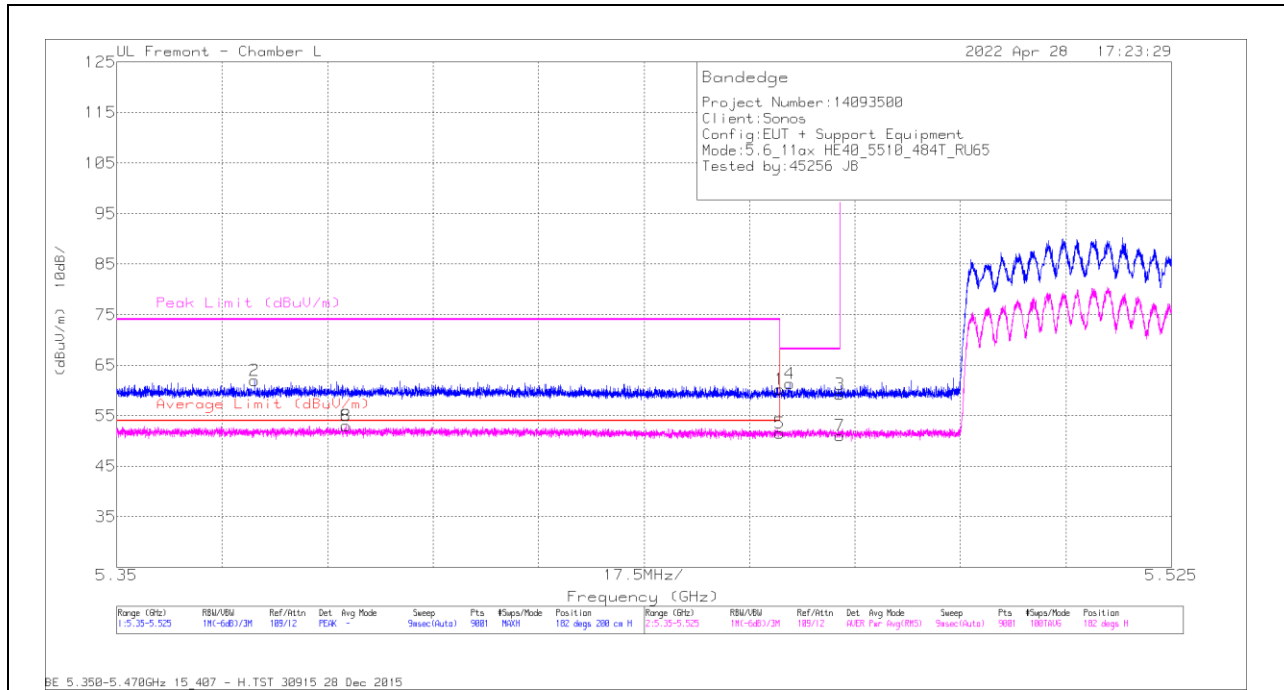

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	32.37	Pk	34.9	-7	0	60.27	-	-	68.2	-7.93	182	200	H
2	* 5.372866	34.19	Pk	34.9	-7.1	0	61.99	-	-	74	-12.01	182	200	H
3	5.47	31.37	Pk	34.9	-7	0	59.27	-	-	68.2	-8.93	182	200	H
4	5.461706	33.45	Pk	34.9	-7	0	61.35	-	-	68.2	-6.85	182	200	H
5	* 5.46	20.71	RMS	34.9	-7	2.94	51.55	54	-2.45	-	-	182	200	H
6	* 5.388013	22.16	RMS	34.9	-7	2.94	53	54	-1	-	-	182	200	H
7	5.47	20.18	RMS	34.9	-7	2.94	51.02	-	-	-	-	182	200	H
8	* 5.388013	22.16	RMS	34.9	-7	2.94	53	54	-1	-	-	182	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

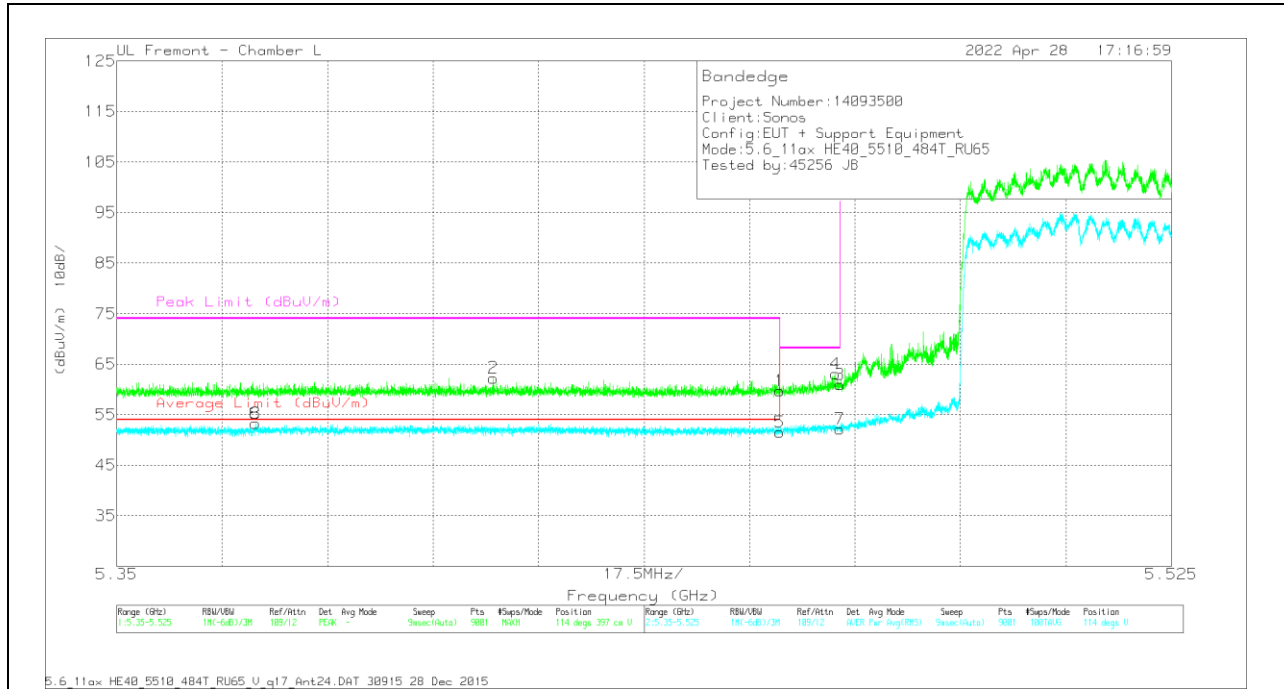

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	31.88	Pk	34.9	-7	0	59.78	-	-	68.2	-8.42	114	397	V
2	* 5.412435	34.37	Pk	34.9	-7	0	62.27	-	-	74	-11.73	114	397	V
3	5.47	33.01	Pk	34.9	-7	0	60.91	-	-	68.2	-7.29	114	397	V
4	5.469231	35.22	Pk	34.9	-7	0	63.12	-	-	68.2	-5.08	114	397	V
5	* 5.46	20.65	RMS	34.9	-7	2.94	51.49	54	-2.51	-	-	114	397	V
6	* 5.373022	22.49	RMS	34.9	-7.1	2.94	53.23	54	-7.77	-	-	114	397	V
7	5.47	21.28	RMS	34.9	-7	2.94	52.12	-	-	-	-	114	397	V
8	* 5.373022	22.49	RMS	34.9	-7.1	2.94	53.23	54	-7.77	-	-	114	397	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

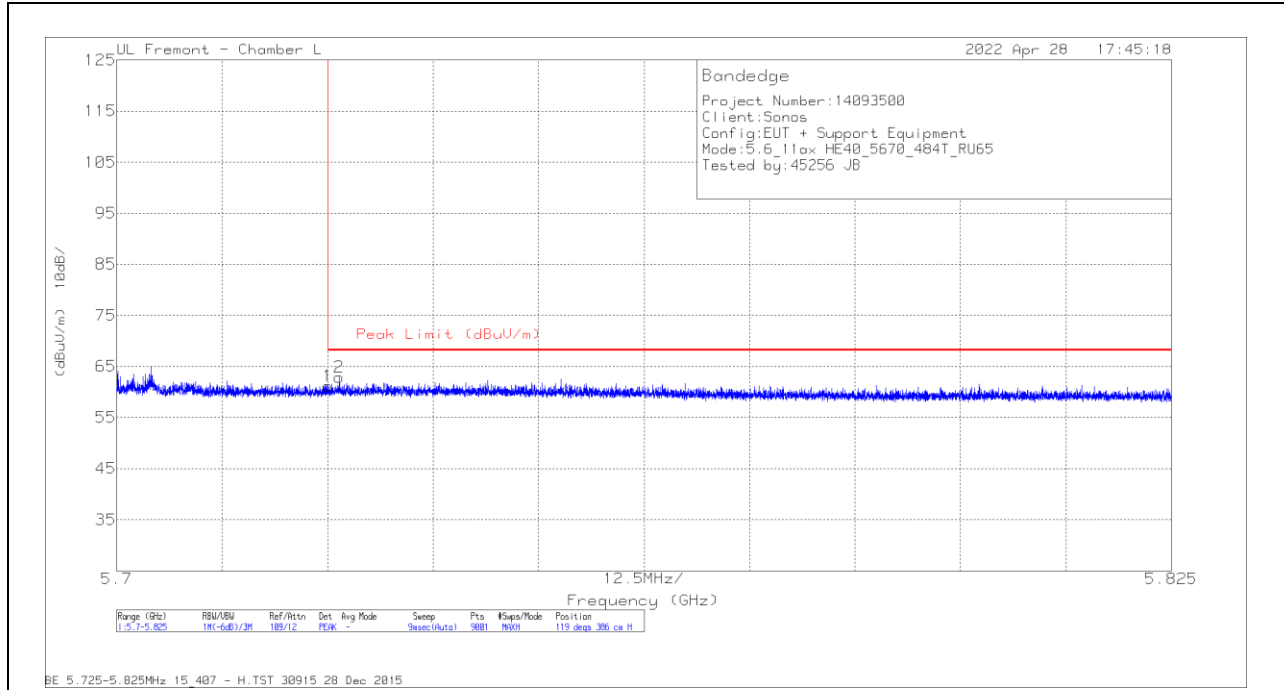


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	32.92	Pk	34.8	-6.6	61.12	68.2	-7.08	119	386	H
2	5.726375	34.63	Pk	34.8	-6.5	62.93	68.2	-5.27	119	386	H

Pk - Peak detector

VERTICAL RESULT

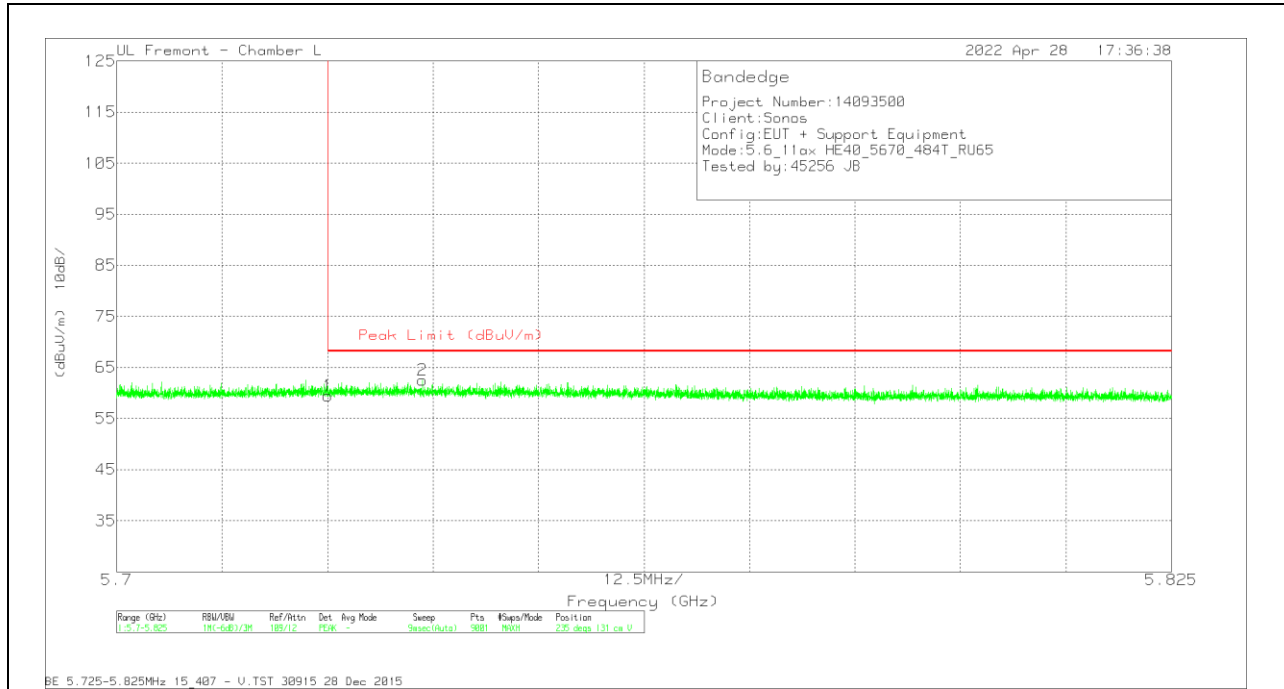


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	31.21	Pk	34.8	-6.6	59.41	68.2	-8.79	235	131	V
2	5.736223	34.21	Pk	34.8	-6.5	62.51	68.2	-5.69	235	131	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

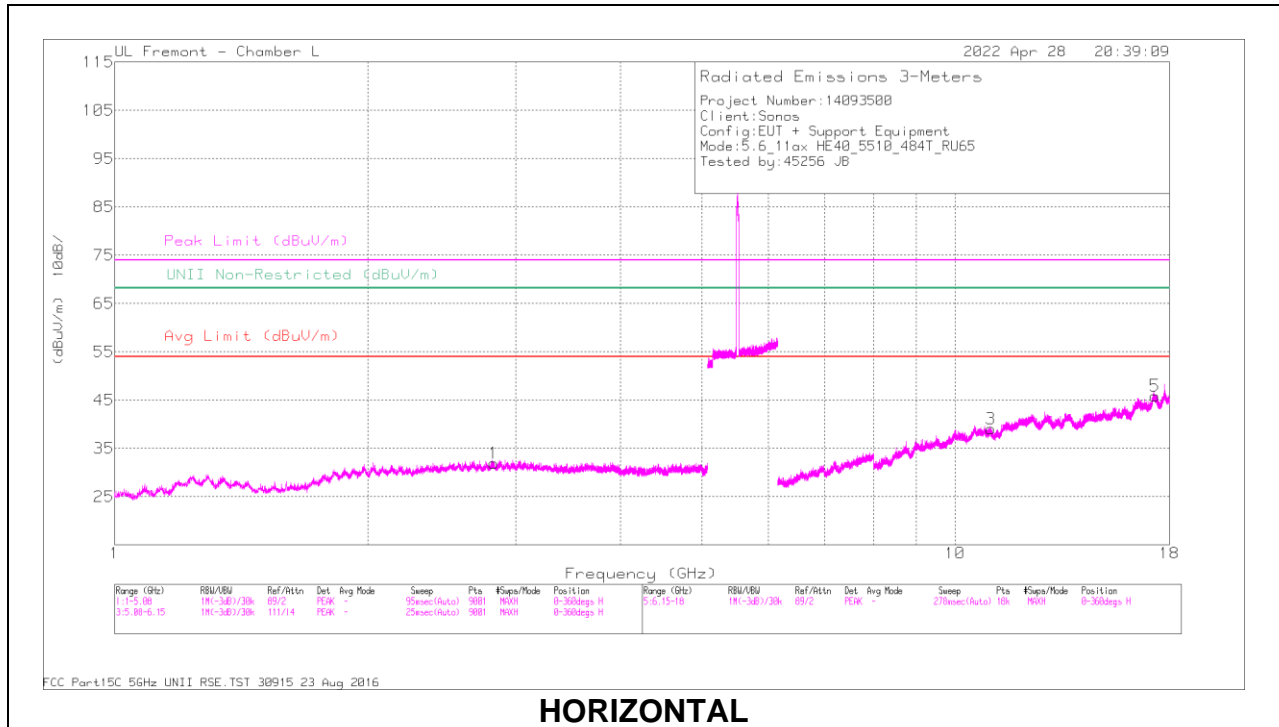

HORIZONTAL

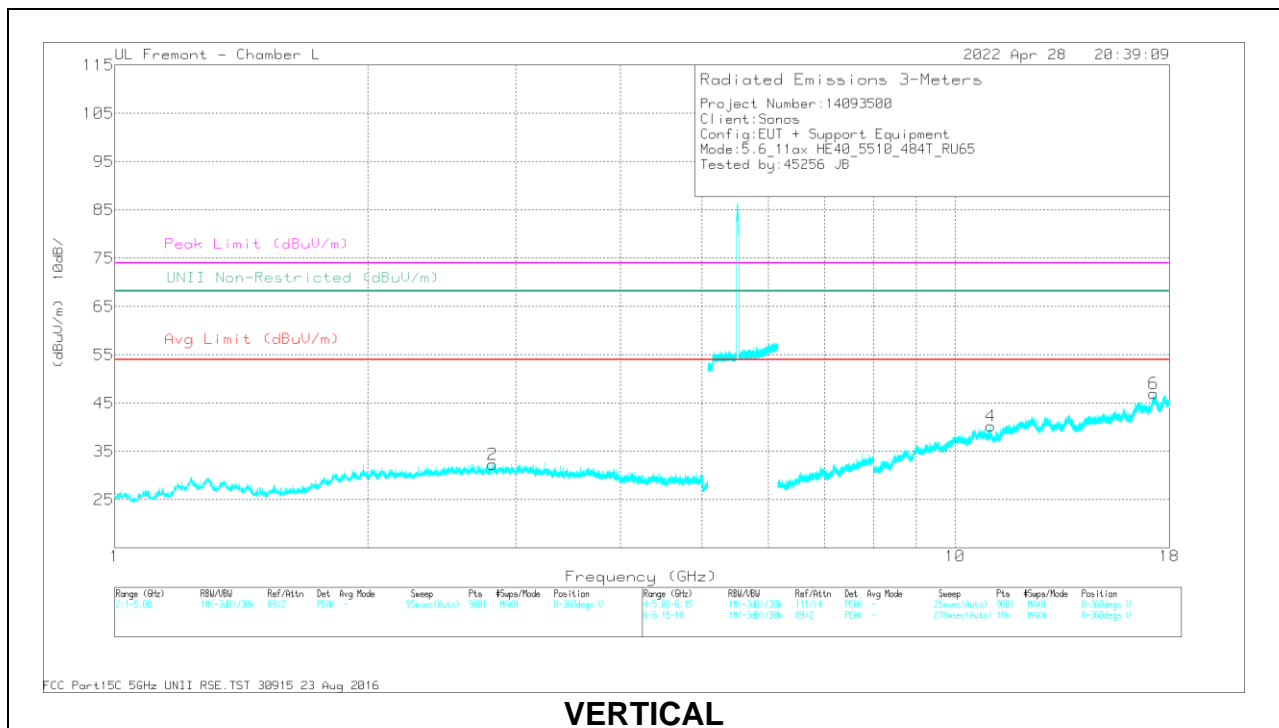

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.823908	38.26	PK-U	32.6	-29.1	0	41.76	-	-	74	-32.24	-	-	0	132	H
	* 2.823133	26.51	ADR	32.6	-29.1	2.94	32.95	54	-21.05	-	-	-	-	0	132	H
2	* 2.81635	38.46	PK-U	32.6	-29.2	0	41.86	-	-	74	-32.14	-	-	257	107	V
	* 2.816302	26.64	ADR	32.6	-29.2	2.94	32.98	54	-21.02	-	-	-	-	257	107	V
5	17.301455	31.49	PK-U	40.9	-16.4	0	55.99	-	-	-	-	68.2	-12.21	314	183	H
3	* 11.026701	31.34	PK-U	37.6	-19.1	0	49.84	-	-	74	-24.16	-	-	201	163	H
	* 11.030633	18.89	ADR	37.6	-19.1	2.94	40.33	54	-13.67	-	-	-	-	201	163	H
6	17.22697	31.17	PK-U	40.9	-15.9	0	56.17	-	-	-	-	68.2	-12.03	97	130	V
4	* 11.030678	31.38	PK-U	37.6	-19.1	0	49.88	-	-	74	-24.12	-	-	206	163	V
	* 11.030606	19.11	ADR	37.6	-19.1	2.94	40.55	54	-13.45	-	-	-	-	206	163	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL

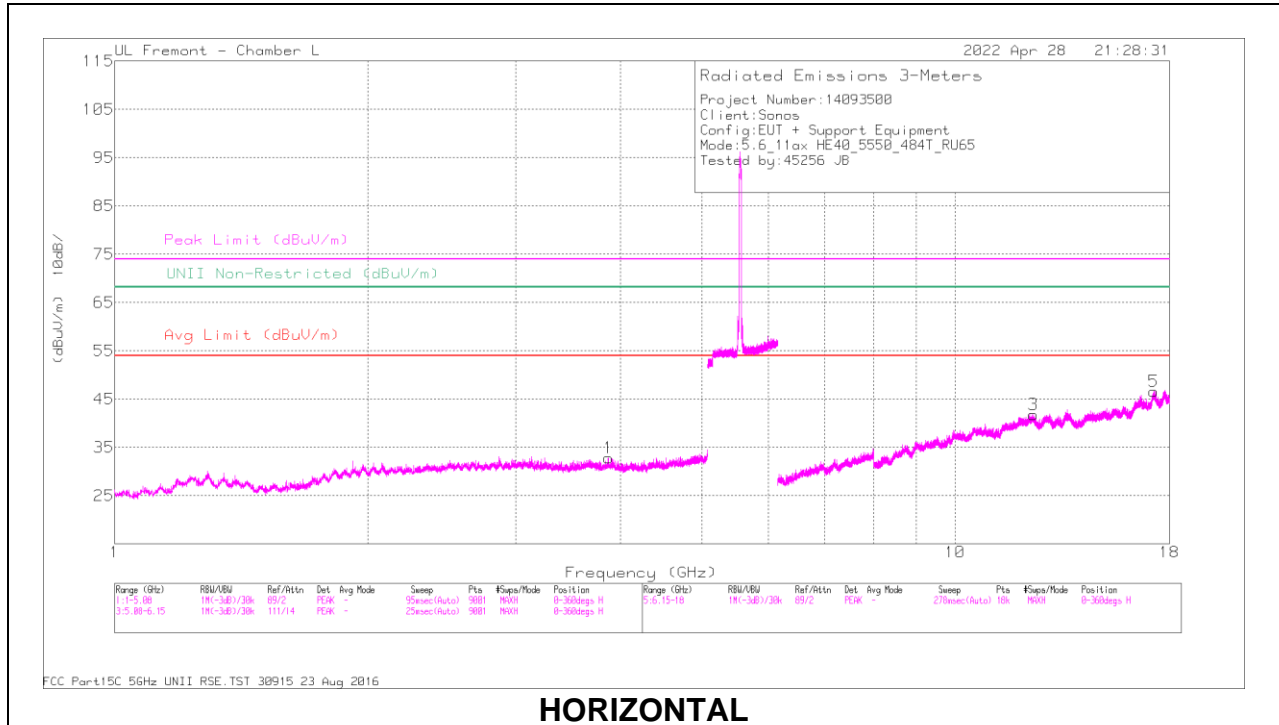

HORIZONTAL

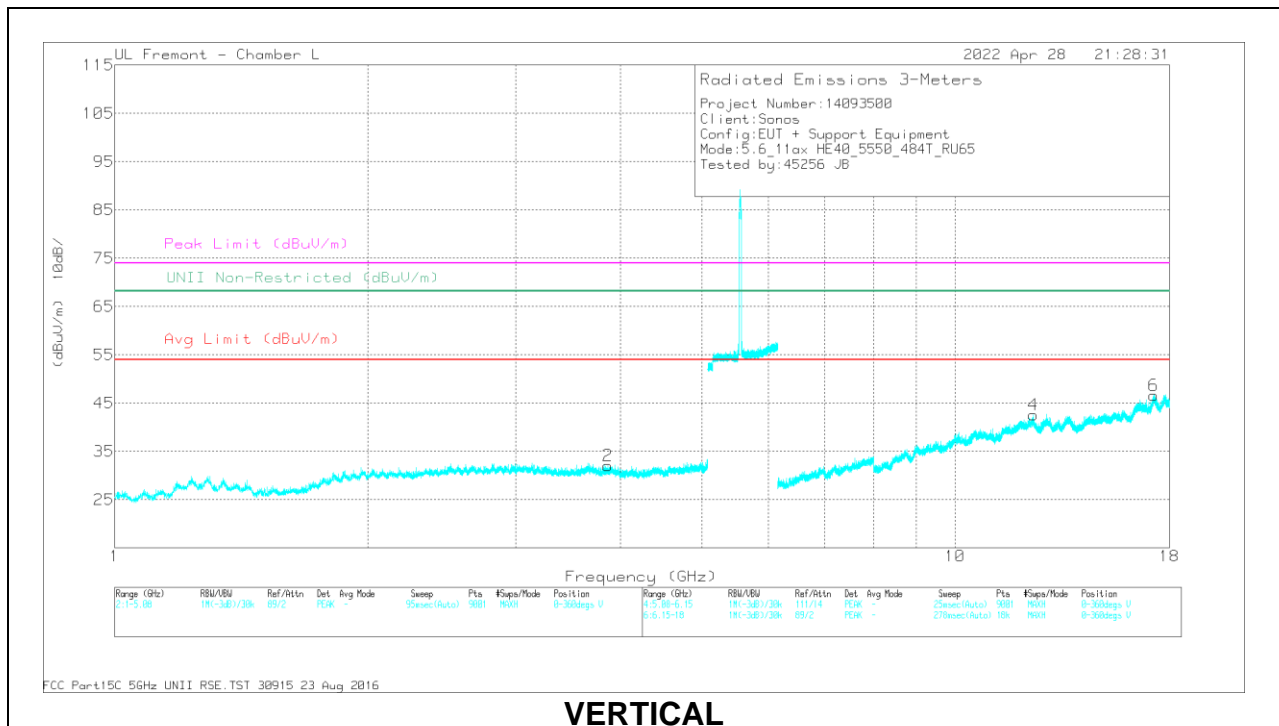

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.869009	36.23	PK-U	33.2	-27.9	0	41.53	-	-	74	-32.47	-	-	81	105	H
	* 3.867954	24.31	ADR	33.2	-27.9	2.94	32.55	54	-21.45	-	-	-	-	81	105	H
2	* 3.86704	36.77	PK-U	33.2	-27.9	0	42.07	-	-	74	-31.93	-	-	332	111	V
	* 3.864503	25.07	ADR	33.2	-27.9	2.94	33.31	54	-20.69	-	-	-	-	332	111	V
5	17.251817	31.32	PK-U	40.9	-15.9	0	56.32	-	-	-	-	68.2	-11.88	310	105	H
3	* 12.39856	30.78	PK-U	39.2	-18.9	0	51.08	-	-	74	-22.92	-	-	55	158	H
	* 12.399475	19.24	ADR	39.2	-18.9	2.94	42.48	54	-11.52	-	-	-	-	55	158	H
6	17.239967	30.64	PK-U	41	-15.8	0	55.84	-	-	-	-	68.2	-12.36	357	171	V
4	* 12.392649	31.41	PK-U	39.1	-18.9	0	51.61	-	-	74	-22.39	-	-	253	190	V
	* 12.390391	19.25	ADR	39.1	-18.9	2.94	42.39	54	-11.61	-	-	-	-	253	190	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL

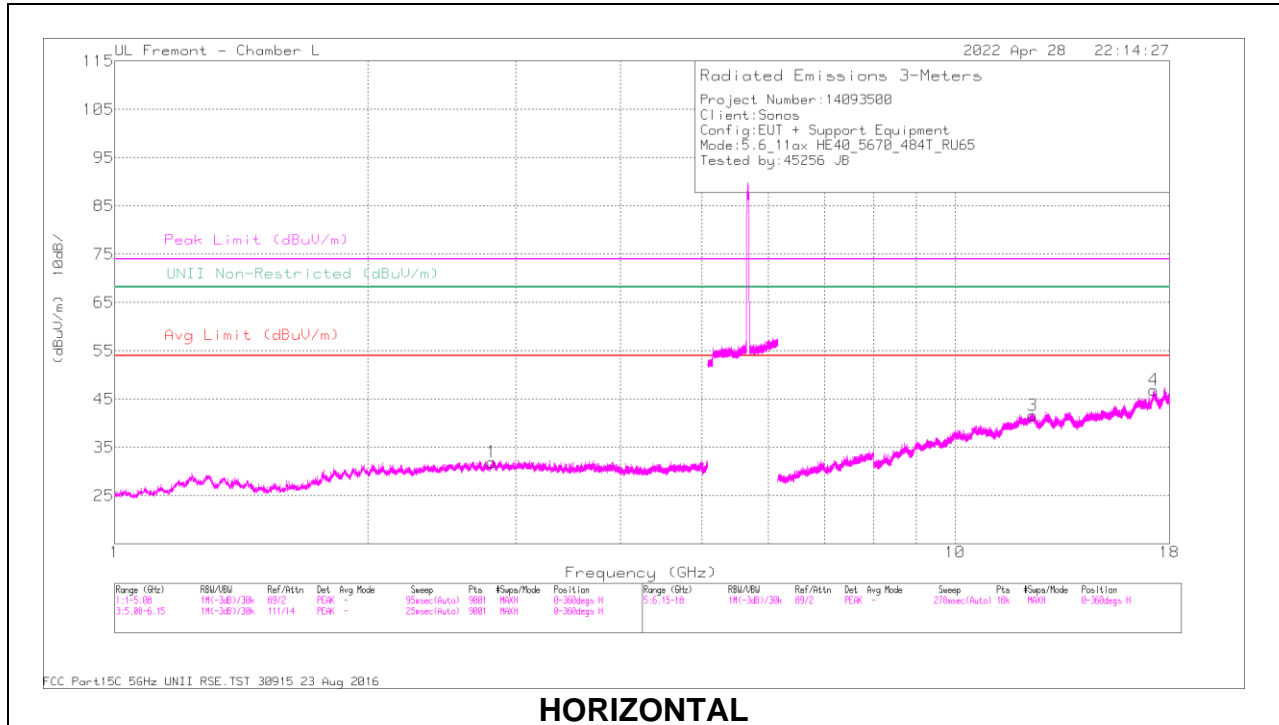

HORIZONTAL

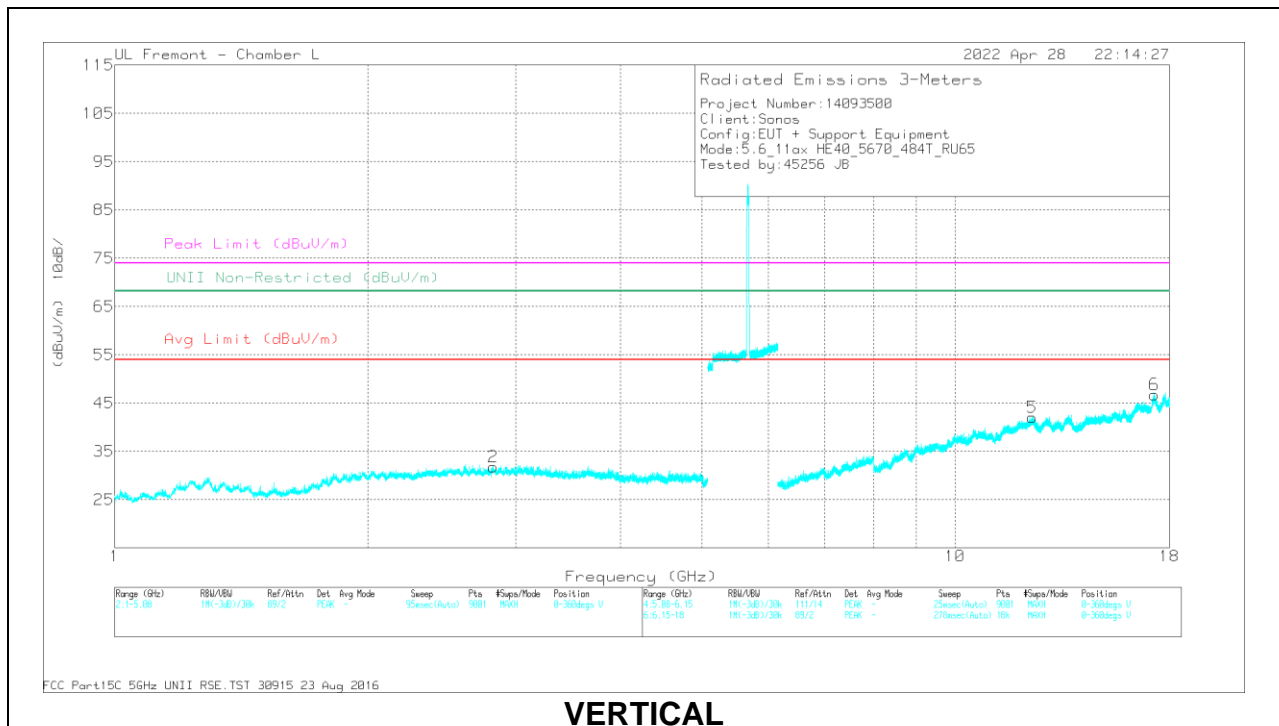

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.817335	38.72	PK-U	32.6	-29.2	0	42.12	-	-	74	-31.88	-	-	136	103	H
	* 2.817874	26.56	ADR	32.6	-29.2	2.94	32.9	54	-21.1	-	-	-	-	136	103	H
2	* 2.818801	38.52	PK-U	32.6	-29.2	0	41.92	-	-	74	-32.08	-	-	212	101	V
	* 2.820024	26.56	ADR	32.6	-29.2	2.94	32.9	54	-21.1	-	-	-	-	212	101	V
4	17.23397	30.82	PK-U	41	-15.8	0	56.02	-	-	-	-	68.2	-12.18	23	192	H
3	* 12.384493	31.19	PK-U	39.1	-19	0	51.29	-	-	74	-22.71	-	-	123	102	H
	* 12.384109	19.48	ADR	39.1	-19	2.94	42.52	54	-11.48	-	-	-	-	123	102	H
6	17.263519	30.9	PK-U	40.9	-16.1	0	55.7	-	-	-	-	68.2	-12.5	291	117	V
5	* 12.366538	30.89	PK-U	39.1	-19.1	0	50.89	-	-	74	-23.11	-	-	352	101	V
	* 12.365495	19.35	ADR	39.1	-19.1	2.94	42.29	54	-11.71	-	-	-	-	352	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.9. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE 5.6GHz BAND

2TX Antenna 2 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 0

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

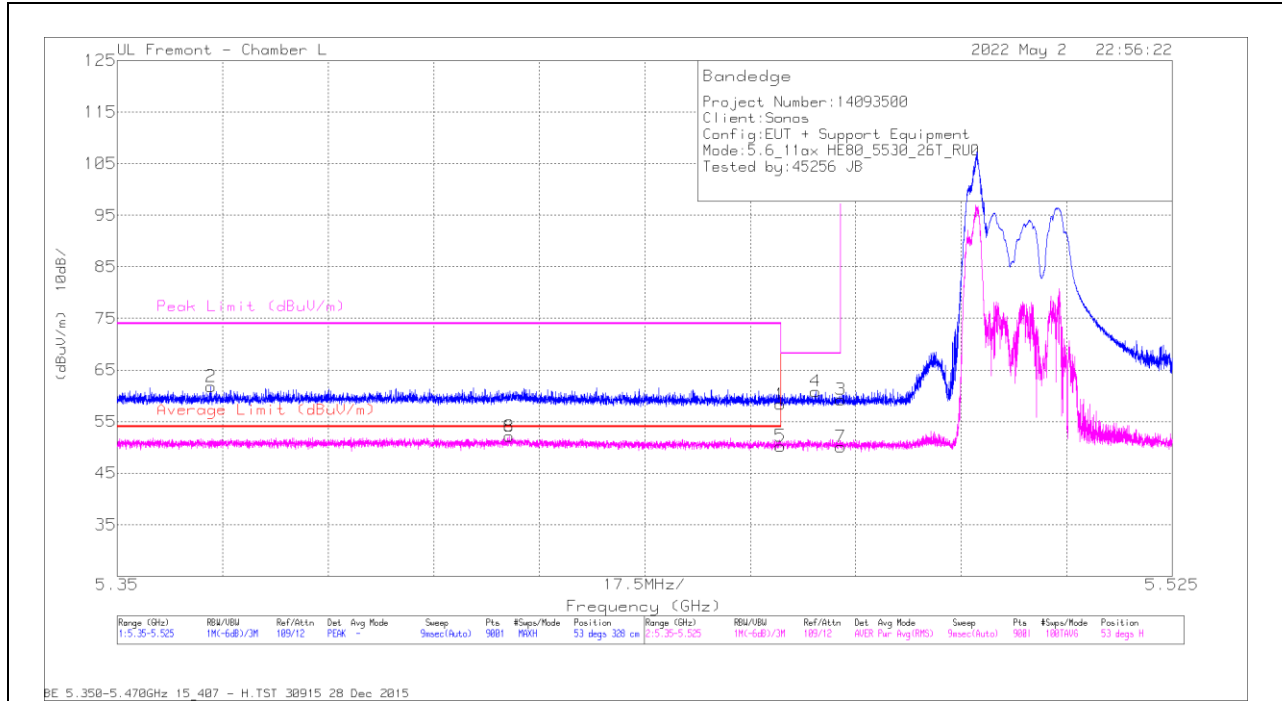

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	30.44	Pk	34.9	-7	0	58.34	-	-	68.2	-9.86	53	328	H
2	* 5.365555	33.98	Pk	34.9	-7.1	0	61.78	-	-	74	-12.22	53	328	H
3	5.47	31.36	Pk	34.9	-7	0	59.26	-	-	68.2	-8.94	53	328	H
4	5.465847	32.95	Pk	34.9	-7	0	60.85	-	-	68.2	-7.35	53	328	H
5	* 5.46	20.37	RMS	34.9	-7	1.97	50.24	54	-3.76	-	-	53	328	H
6	* 5.41506	22.25	RMS	34.9	-7	1.97	52.12	54	-1.88	-	-	53	328	H
7	5.47	20.23	RMS	34.9	-7	1.97	50.1	-	-	-	-	53	328	H
8	* 5.41506	22.25	RMS	34.9	-7	1.97	52.12	54	-1.88	-	-	53	328	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

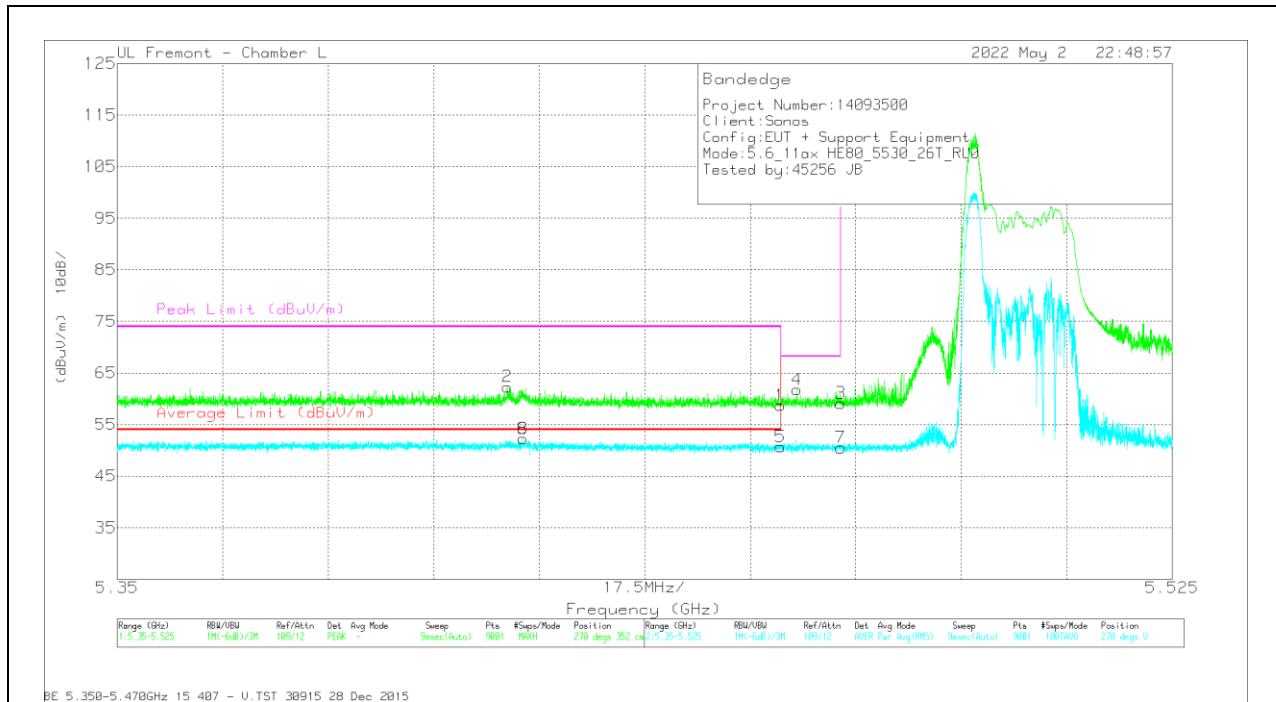

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	30.79	Pk	34.9	-7	0	58.69	-	-	68.2	-9.51	270	352	V
2	* 5.41471	34.41	Pk	34.9	-7	0	62.31	-	-	74	-11.69	270	352	V
3	5.47	31.21	Pk	34.9	-7	0	59.11	-	-	68.2	-9.09	270	352	V
4	5.462736	33.85	Pk	34.9	-7	0	61.75	-	-	68.2	-6.45	270	352	V
5	* 5.46	20.8	RMS	34.9	-7	1.97	50.67	54	-3.33	-	-	270	352	V
6	* 5.417335	22.39	RMS	34.9	-7	1.97	52.26	54	-1.74	-	-	270	352	V
7	5.47	20.66	RMS	34.9	-7	1.97	50.53	-	-	-	-	270	352	V
8	* 5.417335	22.39	RMS	34.9	-7	1.97	52.26	54	-1.74	-	-	270	352	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

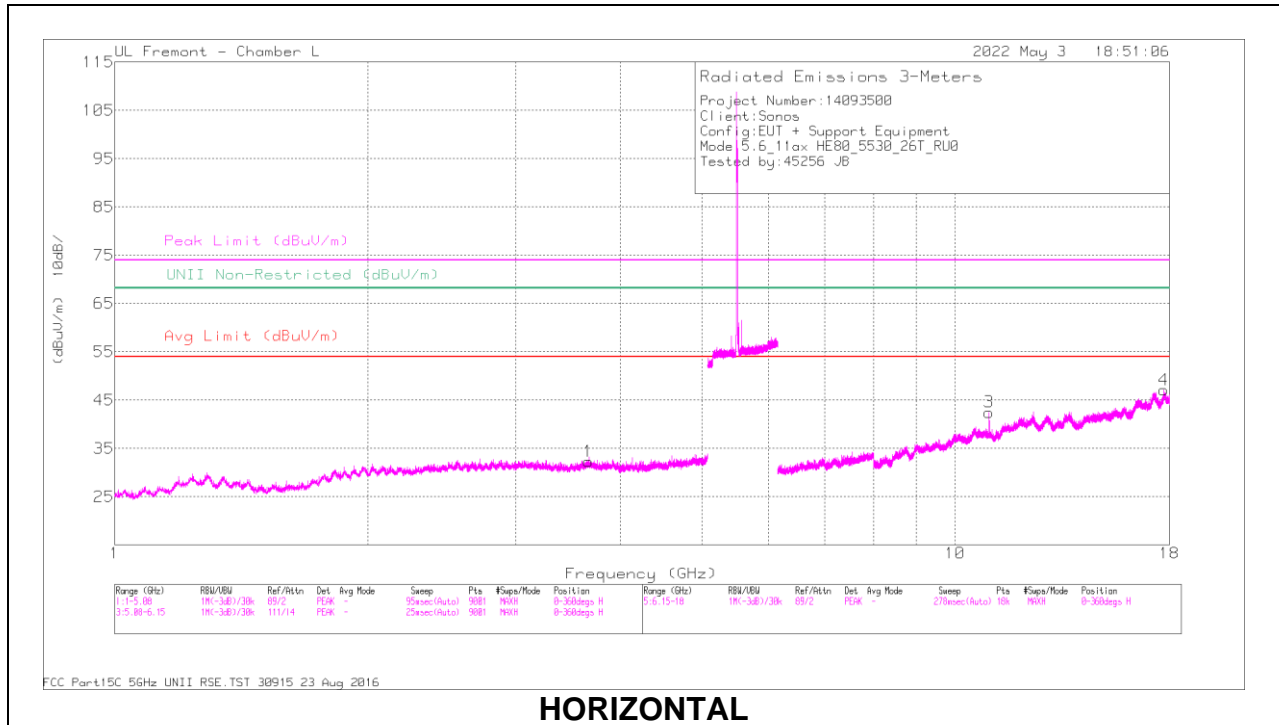

HORIZONTAL

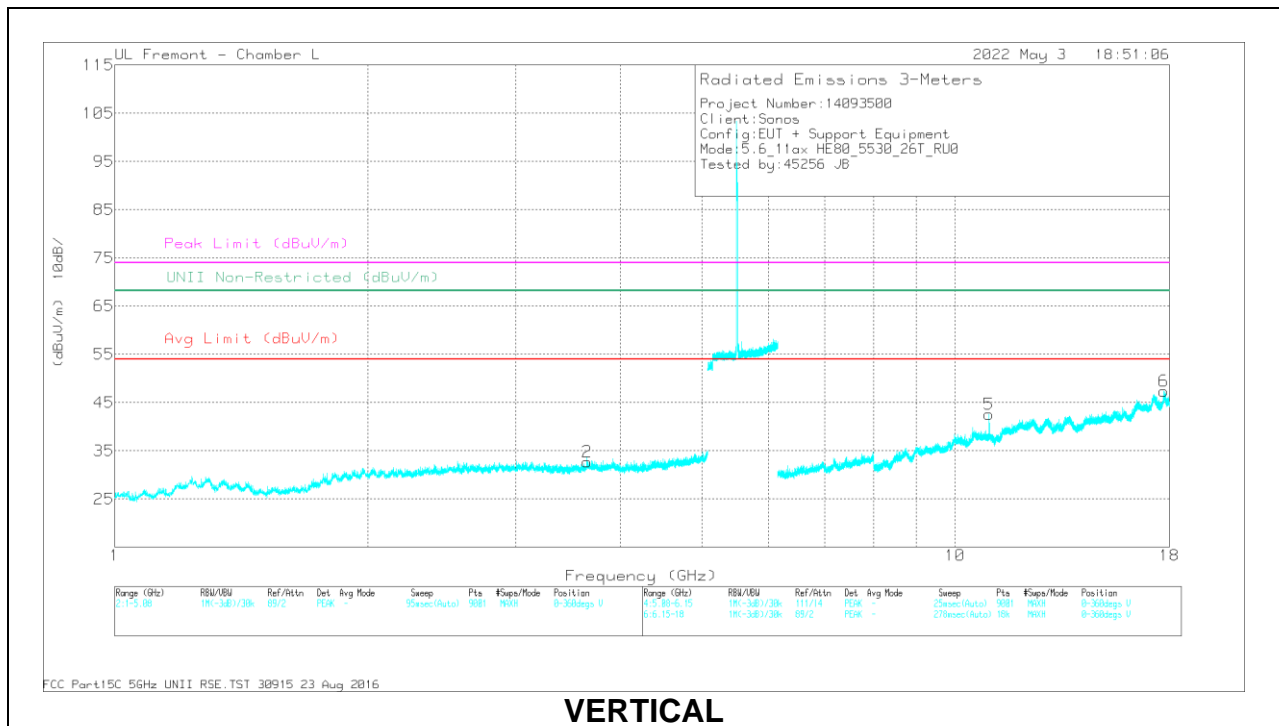

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.661843	36.62	PK-U	33.2	-27.6	0	42.22	-	-	74	-31.78	-	-	258	314	H
	* 3.662822	24.64	ADR	33.2	-27.6	1.97	32.21	54	-21.79	-	-	-	-	258	314	H
2	* 3.653604	37.25	PK-U	33.1	-27.5	0	42.85	-	-	74	-31.15	-	-	83	108	V
	* 3.651614	25.25	ADR	33.1	-27.5	1.97	32.82	54	-21.18	-	-	-	-	83	108	V
3	* 10.983427	41.85	PK-U	37.6	-19.1	0	60.35	-	-	74	-13.65	-	-	196	181	H
	* 10.984246	24.91	ADR	37.6	-19.1	1.97	45.38	54	-8.62	-	-	-	-	196	181	H
4	* 17.725322	30.93	PK-U	41.4	-15.9	0	56.43	-	-	74	-17.57	-	-	343	196	H
	* 17.726936	18.54	ADR	41.4	-15.9	1.97	46.01	54	-7.99	-	-	-	-	343	196	H
5	* 10.984543	39.34	PK-U	37.6	-19	0	57.94	-	-	74	-16.06	-	-	189	150	V
	* 10.983528	24.78	ADR	37.6	-19.1	1.97	45.25	54	-8.75	-	-	-	-	189	150	V
6	* 17.725364	30.89	PK-U	41.4	-15.9	0	56.39	-	-	74	-17.61	-	-	328	136	V
	* 17.724041	19.07	ADR	41.3	-15.9	1.97	46.44	54	-7.56	-	-	-	-	328	136	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 2 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 36

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

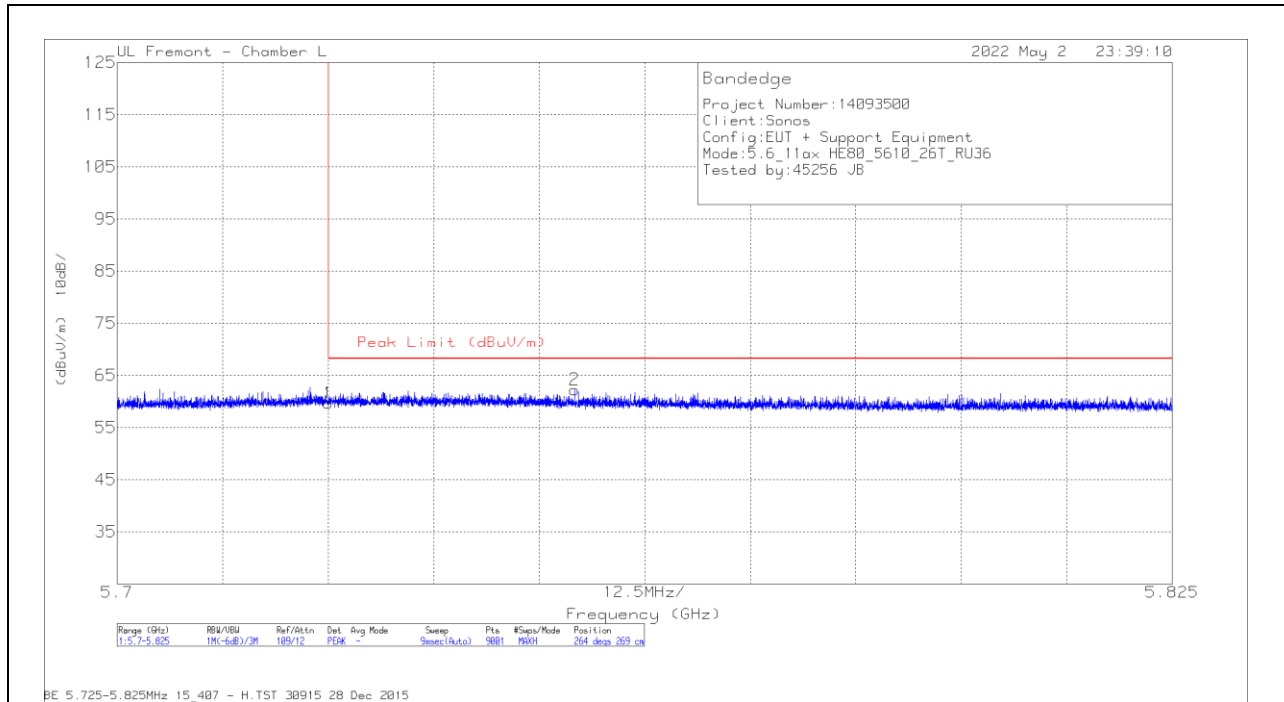


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	31.46	Pk	34.8	-6.6	59.66	68.2	-8.54	264	269	H
2	5.754195	34.04	Pk	34.8	-6.6	62.24	68.2	-5.96	264	269	H

Pk - Peak detector

VERTICAL RESULT

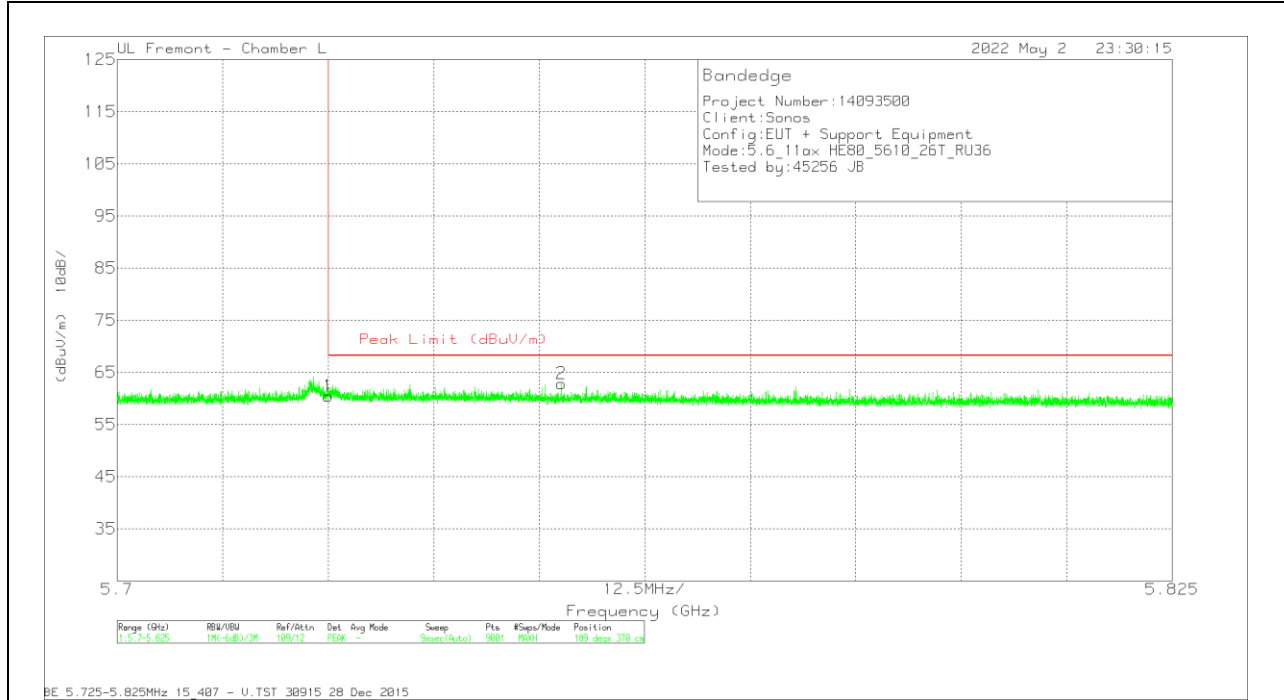


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	32.24	Pk	34.8	-6.6	60.44	68.2	-7.76	189	370	V
2	5.752639	34.64	Pk	34.8	-6.6	62.84	68.2	-5.36	189	370	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

HIGH CHANNEL

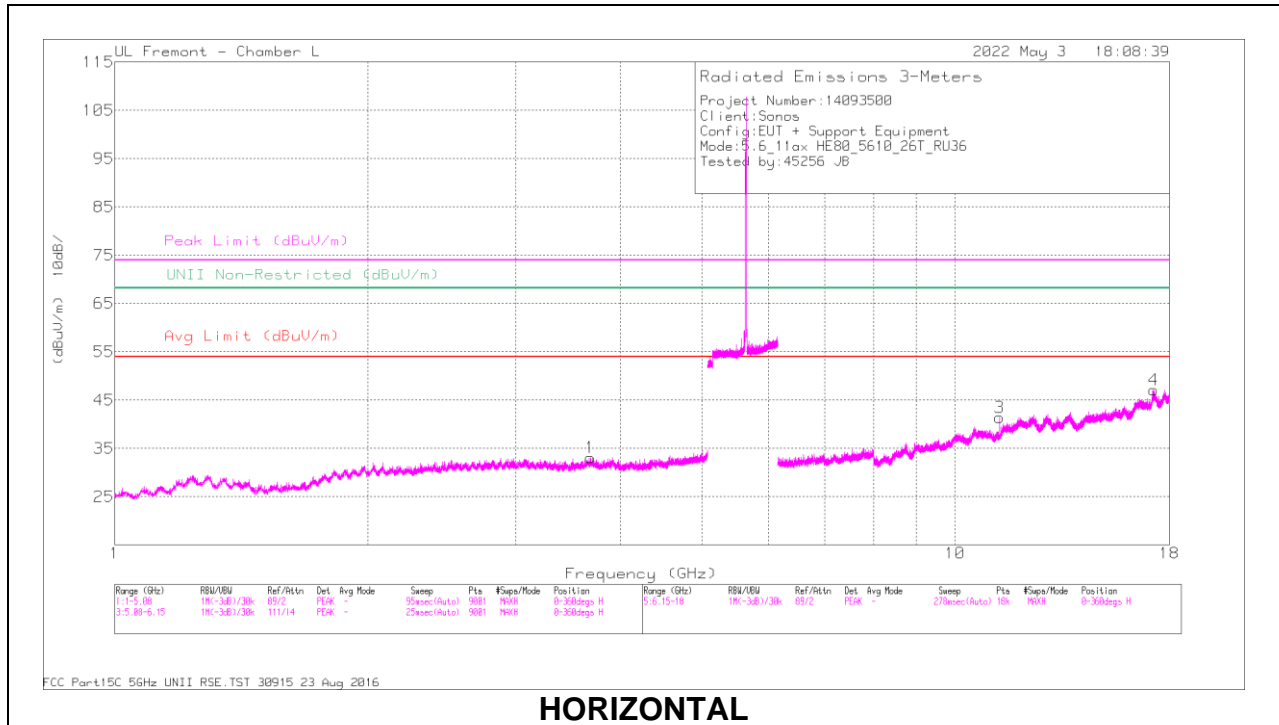

HORIZONTAL

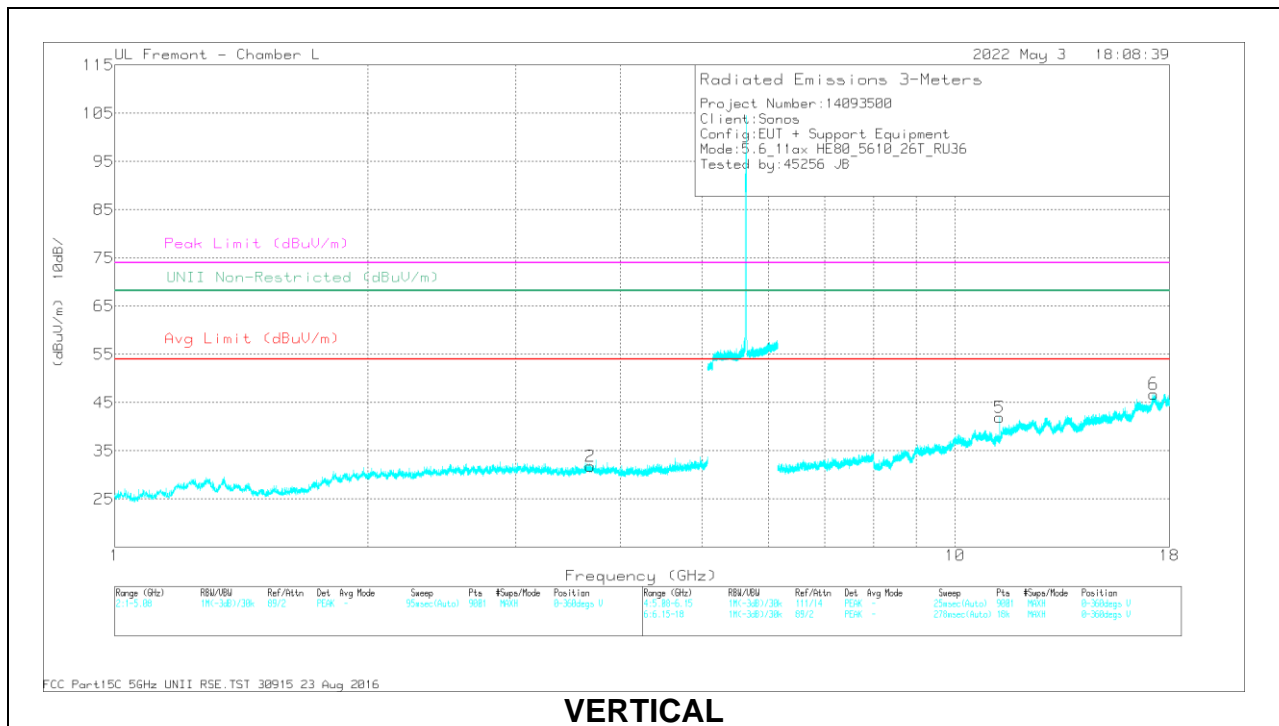

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.680444	37.55	PK-U	33.4	-27.8	0	43.15	-	-	74	-30.85	-	-	186	112	H
	* 3.68014	25.31	ADR	33.4	-27.8	1.97	32.88	54	-21.12	-	-	-	-	186	112	H
2	* 3.678514	37.13	PK-U	33.4	-27.8	0	42.73	-	-	74	-31.27	-	-	88	387	V
	* 3.680728	24.77	ADR	33.4	-27.8	1.97	32.34	54	-21.66	-	-	-	-	88	387	V
3	* 11.296223	36.51	PK-U	38.1	-19	0	55.61	-	-	74	-18.39	-	-	342	198	H
	* 11.296028	21.63	ADR	38.1	-19	1.97	42.7	54	-11.3	-	-	-	-	342	198	H
4	17.229777	30.91	PK-U	40.9	-15.8	0	56.01	-	-	-	-	68.2	-12.19	17	226	H
5	* 11.295557	35.8	PK-U	38.1	-19	0	54.9	-	-	74	-19.1	-	-	247	106	V
	* 11.295961	21.45	ADR	38.1	-19	1.97	42.52	54	-11.48	-	-	-	-	247	106	V
6	17.24725	31	PK-U	41	-15.9	0	56.1	-	-	-	-	68.2	-12.1	122	117	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

TX Antenna 2 + Antenna 4 OFDMA MODE: 996-Tones, RU Index 67

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

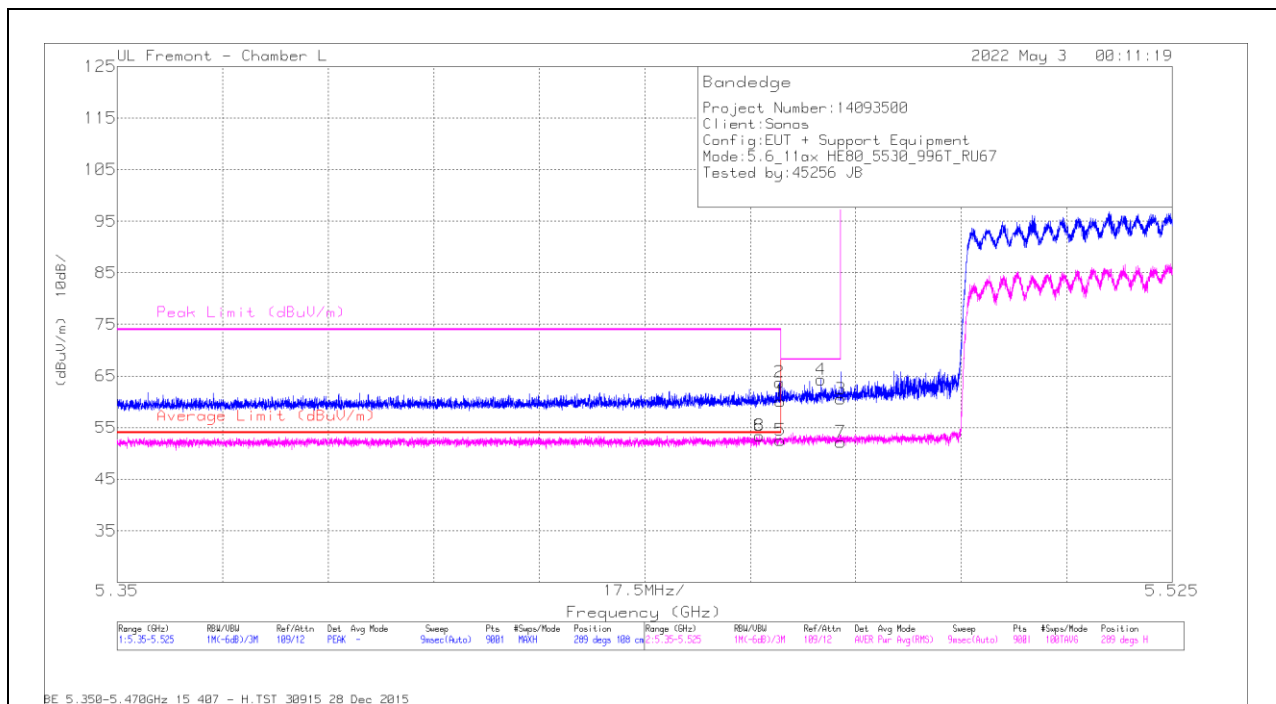

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	32.18	Pk	34.9	-7	0	60.08	-	-	68.2	-8.12	289	108	H
2	* 5.459878	35.87	Pk	34.9	-7	0	63.77	-	-	74	-10.23	289	108	H
3	5.47	32.64	Pk	34.9	-7	0	60.54	-	-	68.2	-7.66	289	108	H
4	5.466761	36.39	Pk	34.9	-7	0	64.29	-	-	68.2	-3.91	289	108	H
5	* 5.46	21.39	RMS	34.9	-7	3.25	52.54	54	-1.46	-	-	289	108	H
6	* 5.456514	22.37	RMS	34.9	-7.1	3.25	53.42	54	-5.8	-	-	289	108	H
7	5.47	21.01	RMS	34.9	-7	3.25	52.16	-	-	-	-	289	108	H
8	* 5.456514	22.37	RMS	34.9	-7.1	3.25	53.42	54	-5.8	-	-	289	108	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

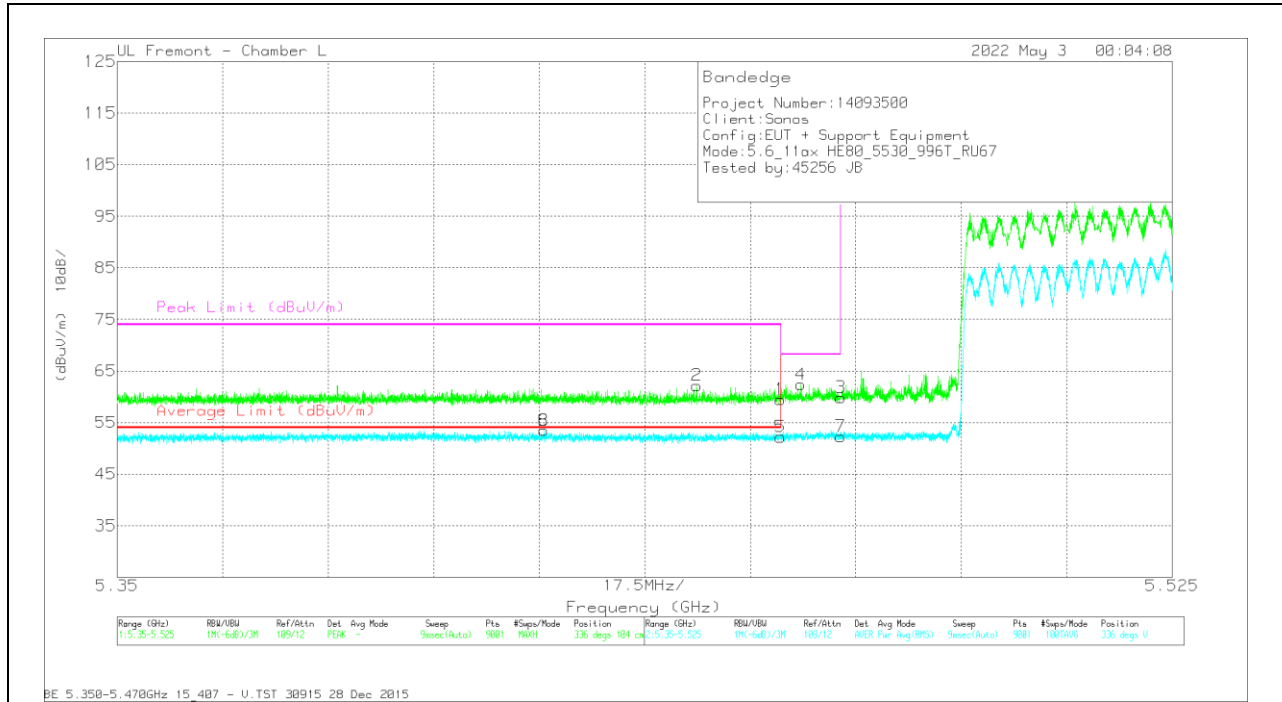

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	31.58	Pk	34.9	-7	0	59.48	-	-	68.2	-8.72	336	104	V
2	* 5.446131	34.39	Pk	34.9	-7.1	0	62.19	-	-	74	-11.81	336	104	V
3	5.47	31.95	Pk	34.9	-7	0	59.85	-	-	68.2	-8.35	336	104	V
4	5.463417	34.47	Pk	34.9	-7	0	62.37	-	-	68.2	-5.83	336	104	V
5	* 5.46	21.07	RMS	34.9	-7	3.25	52.22	54	-1.78	-	-	336	104	V
6	* 5.420776	22.31	RMS	34.9	-7	3.25	53.46	54	-0.54	-	-	336	104	V
7	5.47	21.16	RMS	34.9	-7	3.25	52.31	-	-	-	-	336	104	V
8	* 5.420776	22.31	RMS	34.9	-7	3.25	53.46	54	-0.54	-	-	336	104	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

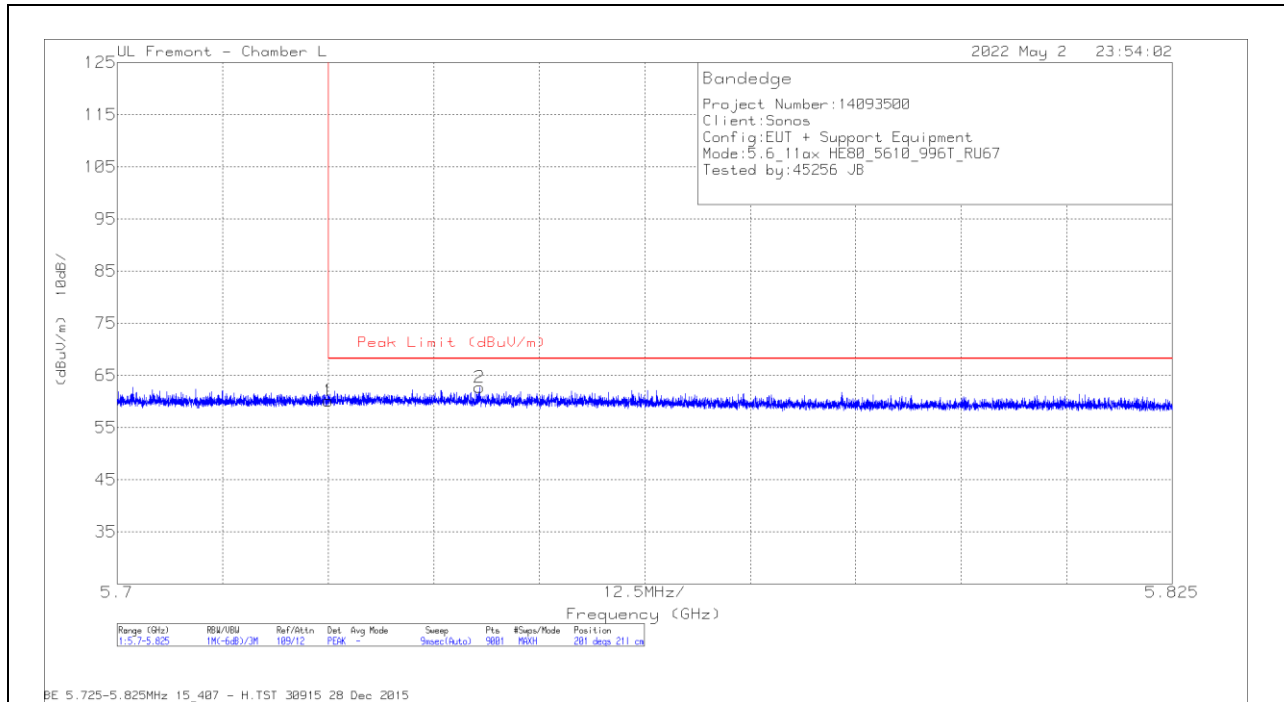


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	31.92	Pk	34.8	-6.6	60.12	68.2	-8.08	201	211	H
2	5.742917	34.4	Pk	34.8	-6.5	62.7	68.2	-5.5	201	211	H

Pk - Peak detector

VERTICAL RESULT

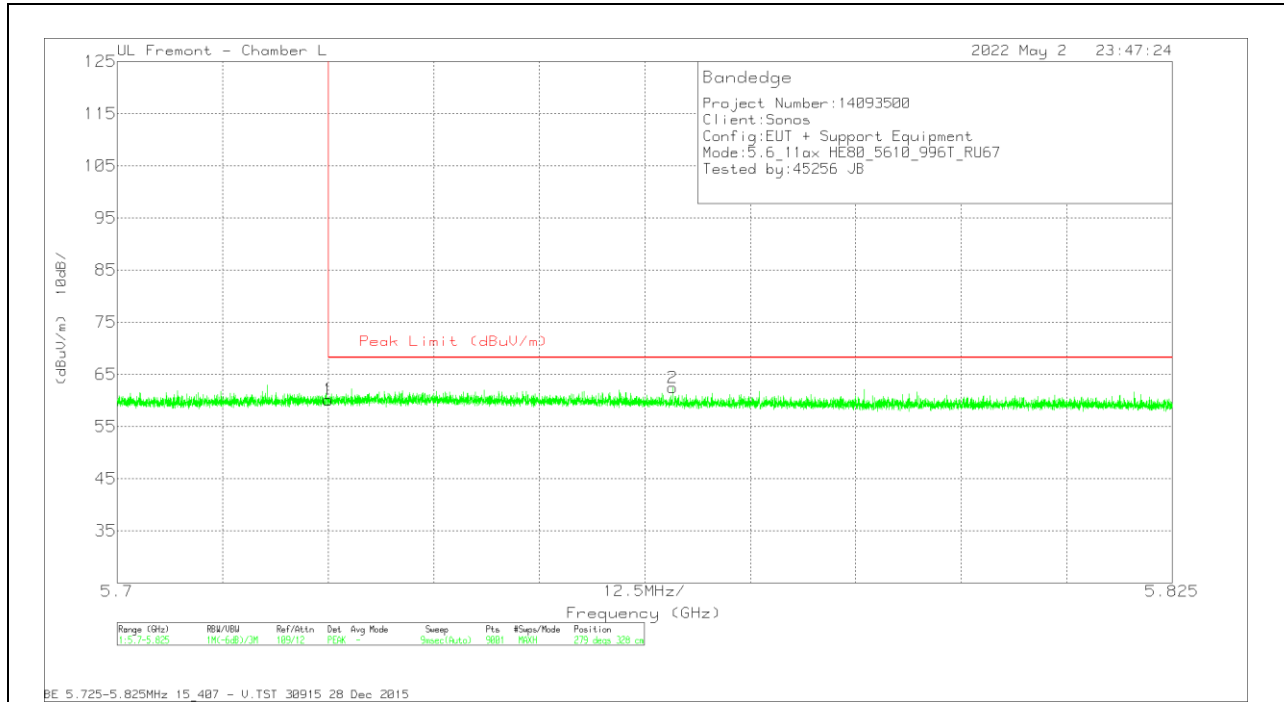

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	31.91	Pk	34.8	-6.6	60.11	68.2	-8.09	279	328	V
2	5.76582	34.14	Pk	34.9	-6.6	62.44	68.2	-5.76	279	328	V

Pk - Peak detector