

TEST REPORT

Report Number.: 14093500-E7V2

Applicant : SONOS INC.
614 CHAPALA ST.
SANTA BARBARA, CA, 93101, U.S.A.

Model : S41

Brand : SONOS

FCC ID : SBVRM041

IC : 5373A-RM041

EUT Description : 802.11 a/b/g/n/ac/ax 2x2 Client Device with BT and BLE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART E
ISED RSS-248 ISSUE 1
ISED RSS-GEN ISSUE 5 + A1 +A2

Date Of Issue:

2022-10-24

Prepared by:

UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	2022-10-13	Initial Issue	---
V2	2022-10-24	Updated Section 9	K.Kedida

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS	6
2. TEST RESULT SUMMARY	8
3. TEST METHODOLOGY	9
4. FACILITIES AND ACCREDITATION	10
5. DECISION RULES AND MEASUREMENT UNCERTAINTY	11
5.1. METROLOGICAL TRACEABILITY	11
5.2. DECISION RULES.....	11
5.3. MEASUREMENT UNCERTAINTY.....	11
6. EQUIPMENT UNDER TEST	12
6.1. EUT DESCRIPTION	12
6.2. EUT DEVICE CLASS.....	12
6.3. MAXIMUM OUTPUT POWER.....	12
6.4. DESCRIPTION OF AVAILABLE ANTENNAS	13
6.5. SOFTWARE AND FIRMWARE.....	13
6.6. WORST-CASE CONFIGURATION AND MODE FOR FINAL TEST	13
6.7. DESCRIPTION OF TEST SETUP.....	14
TEST SETUP.....	14
SETUP DIAGRAM	15
7. MEASUREMENT METHOD.....	16
8. TEST AND MEASUREMENT EQUIPMENT	17
9. ANTENNA PORT TEST RESULTS	18
9.1. ON TIME AND DUTY CYCLE.....	18
9.2. 26 dB BANDWIDTH.....	19
9.2.1. 802.11a MODE 2TX IN THE UNII-5 BAND	20
2TX Antenna 1 + Antenna 4 CDD MODE:.....	20
9.2.2. 802.11a MODE 2TX IN THE UNII-6 BAND	22
2TX Antenna 1 + Antenna 4 CDD MODE:.....	22
9.2.3. 802.11a MODE 2TX IN THE UNII-7 BAND	24
2TX Antenna 1 + Antenna 4 CDD MODE:.....	24

9.2.4.	802.11a MODE 2TX IN THE UNII-8 BAND	26
	2TX Antenna 1 + Antenna 4 CDD MODE:.....	26
9.3.	99% BANDWIDTH.....	28
9.3.1.	802.11a MODE 2TX IN THE UNII-5 BAND	29
	2TX Antenna 1 + Antenna 4 CDD MODE:.....	29
9.3.2.	802.11a MODE 2TX IN THE UNII-6 BAND	31
	2TX Antenna 1 + Antenna 4 CDD MODE:.....	31
9.3.3.	802.11a MODE 2TX IN THE UNII-7 BAND	33
	2TX Antenna 1 + Antenna 4 CDD MODE:.....	33
9.3.4.	802.11a MODE 2TX IN THE UNII-8 BAND	35
	2TX Antenna 1 + Antenna 4 CDD MODE:.....	35
9.4.	OUTPUT POWER AND PSD.....	37
9.4.1.	802.11a MODE 2TX IN THE UNII-5 BAND	38
	2TX Antenna 1 + Antenna 4 CDD MODE:.....	38
9.4.2.	802.11a MODE 2TX IN THE UNII-6 BAND	40
	2TX Antenna 1 + Antenna 4 CDD MODE:.....	40
9.4.3.	802.11a MODE 2TX IN THE UNII-7 BAND	42
	2TX Antenna 1 + Antenna 4 CDD MODE:.....	42
9.4.4.	802.11a MODE 2TX IN THE UNII-8 BAND	44
	2TX Antenna 1 + Antenna 4 CDD MODE:.....	44
9.5.	SPURIOUS EMISSIONS IN-BAND – EMISSION MASK.....	46
9.5.1.	802.11a MODE 2TX IN THE UNII-5 BAND	47
	2TX Antenna 1 + Antenna 4 CDD MODE:.....	47
9.5.2.	802.11a MODE 2TX IN THE UNII-6 BAND	48
	2TX Antenna 1 + Antenna 4 CDD MODE:.....	48
9.5.3.	802.11a MODE 2TX IN THE UNII-7 BAND	49
	2TX Antenna 1 + Antenna 4 CDD MODE:.....	49
9.5.4.	802.11a MODE 2TX IN THE UNII-8 BAND	51
	2TX Antenna 1 + Antenna 4 CDD MODE:.....	51
10.	RADIATED TEST RESULTS.....	52
10.1.	TRANSMITTER OUTSIDE 5.925-7.125 GHz , 1- 18GHz	54
10.1.1.	TX ABOVE 1 GHz 802.11a MODE IN THE UNII-5 BAND	54
	2TX Antenna 1 + Antenna 4 CDD MODE:.....	54
10.1.2.	TX ABOVE 1 GHz 802.11a MODE IN THE UNII-6 BAND	62
	2TX Antenna 1 + Antenna 4 CDD MODE:.....	62
10.1.3.	TX ABOVE 1 GHz 802.11a MODE IN THE UNII-7 BAND	68
	2TX Antenna 1 + Antenna 4 CDD MODE:.....	68
10.1.4.	TX ABOVE 1 GHz 802.11a MODE IN THE UNII-8 BAND	76
	2TX Antenna 1 + Antenna 4 CDD MODE:.....	76
10.2.	WORST CASE BELOW 30MHz	84

10.3.	WORST CASE BELOW 1 GHz	85
10.4.	WORST CASE 18-26 GHz	87
10.5.	WORST CASE 26-40 GHz	89
11.	AC POWER LINE CONDUCTED EMISSIONS	91
	RESULTS.....	91
12.	SETUP PHOTOS.....	94
	ANTENNA PORT AND AC LINE CONDUCTED SETUP	94
	RADIATED RF MEASUREMENT SETUP	95

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SONOS INC.
614 Chapala St.
Santa Barbara, CA, 93101, U.S.A.

EUT DESCRIPTION: 802.11 a/b/g/n/ac/ax 2x2 Client Device with BT and BLE

MODEL: S41

BRAND: SONOS

SERIAL NUMBER: Radiated Sample: 528B4 and 6B90A
Conducted Sample: 4304F

DATE TESTED: 2022-5-11 to 2022-6-03


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Complies
ISED RSS-248 Issue 1	Complies
ISED RSS-GEN Issue 5 + A1 + A2	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For
UL Verification Services Inc. By:



Francisco de Anda
Staff Engineer
Consumer Technology Division
UL Verification Services Inc.

Prepared By:



Glenn Escano
Senior Test Engineer
Consumer Technology Division
UL Verification Services Inc.

1st Reviewed By:



Vien Tran
Senior Laboratory Engineer
Consumer Technology Division
UL Verification Services Inc.

2nd Reviewed By:



Kiya Kedida
Senior Project Engineer
Consumer Technology Division
UL Verification Services Inc.

2. TEST RESULT SUMMARY

This report contains data provided by the customer which can impact the validity of results. UL Verification Services Inc. is only responsible for the validity of results after the integration of the data provided by the customer.

FCC Clause	ISED Clause	Requirement	Result	Comment
See Comment		Duty Cycle	Reporting purposes only	ANSI C63.10 Section 12.2 ...
See Comment	RSS-GEN 6.7	99% BW	Reporting purposes only	ANSI C63.10 Section 6.9.3
§15.407 (a) (10)	---	26dB BW	Compliant	None.
§15.407 (a) (8)	RSS-248 4.6.3	Output Power e.i.r.p.	Compliant	Indoor Client.
§15.407 (a) (8)	RSS-248 4.6.3	PSD e.i.r.p	Compliant	Indoor Client.
§15.407 (b) (6)	RSS-248 4.7.2(a)	Emissions outside 5.925-7.125 GHz band	Compliant	None
§15.407 (b) (7)	RSS-248 4.7.2(b)	Emissions within 5.925-7.125 GHz Band(Emissions Mask)	Compliant	None
§15.205	RSS-GEN 8.10	Unwanted emissions in restricted bands	Compliant	None
§15.209	RSS-GEN 8.9	Radiated Spurious Emissions	Compliant	None
§15.207	RSS-GEN 8.8	AC Mains Conducted Emissions	Compliant	None

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with.

- FCC CFR 47 Part 2
- FCC CFR 47 Part 15
- FCC KDB 662911 D01 v02r01
- FCC KDB 789033 D01 v01r03
- FCC KDB 789033 D02 v02r01
- FCC KDB 987594 D01 General Requirements v01r03
- FCC KDB 987594 D02 EMC Measurement v01r01
- ANSI C63.10-2013
- RSS-GEN Issue 5 + A1 + A2
- RSS-248 Issue1

4. FACILITIES AND ACCREDITATION

UL Verification Services Inc. is accredited by A2LA, Certificate Number #0751.05, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
<input checked="" type="checkbox"/>	Building 1: 47173 Benicia Street Fremont, CA 94538, U.S.A	US0104	2324A	550739
<input type="checkbox"/>	Building 2: 47266 Benicia Street Fremont, CA 94538, U.S.A	US0104	22541	550739
<input checked="" type="checkbox"/>	Building 4: 47658 Kato Rd Fremont, CA 94538, U.S.A	US0104	2324B	550739

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{Lab}
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.78 db
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.40 db
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.87 db
Worst Case Radiated Disturbance, 30 to 1000 MHz	6.01 db
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.73 db
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.51 db
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.29 db

Uncertainty figures are valid to a confidence level of 95%.

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)

$$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$$

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.

$$36.5 \text{ dBuV} + 0 \text{ dB} + 10.1 \text{ dB} + 0 \text{ dB} = 46.6 \text{ dBuV}$$

6. EQUIPMENT UNDER TEST

6.1. EUT DESCRIPTION

The EUT is an 802.11 a/b/g/n/ac/ax 2x2 Client Device with BT and BLE.

This report covers non-ax 6E Wifi radio.

6.2. EUT DEVICE CLASS

	U-NII Bands of Operation			
	5	6	7	8
Indoor Client (6XD)	☒	☒	☒	☒

6.3. MAXIMUM OUTPUT POWER

The transmitter has a maximum e.i.r.p. output power as follows:

Frequency Range (MHz)	Mode	Output Power EIRP	Output Power EIRP (mW)
UNII-5 band, 2TX			
5955-6415	802.11a	7.67	5.85
UNII-6 band, 2TX			
6435-6515	802.11a	7.68	5.86
UNII-7 band, 2TX			
6535-6875	802.11a	7.09	5.12
UNII-8 band, 2TX			
6895-7115	802.11a	7.41	5.51

6.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PCB antennas, with a maximum gain as follows.

Frequency Range (MHz)	Peak Antenna Gain (dBi)			
	CHAIN 0		CHAIN 1	
	ANT1 (FR) (Monopole) (dBi)	ANT2 (RL) (Loop) (dBi)	ANT3 (RR) (Loop) (dBi)	ANT4 (FL) (Loop) (dBi)
5925 – 6425	6.1	4.8	4.9	5.9
6425 – 6525	5.7	3.5	4.3	4.3
6525 – 6875	5.5	3.6	4.4	4.7
6875 – 7125	6.3	3.6	3.6	4.5

6.5. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was 69.1-26251-diag.

The test utility software used during testing was GUI 20220422_V4.

6.6. WORST-CASE CONFIGURATION AND MODE FOR FINAL TEST

Radiated emissions below 1GHz, above 18GHz, and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The EUT can only be setup in desktop orientation; therefore, all radiated testing was performed with the EUT in desktop orientation.

The fundamental of the EUT was investigated in the antenna combinations, it was determined that ANT1 and ANT4 was the worst case on all bands. Therefore, all final testing was performed with ANT1 and ANT4.

Worst-case data rate as provided by the manufacturer was:
 802.11a mode: 6 Mbps


6.7. DESCRIPTION OF TEST SETUP

SUPPORT TEST EQUIPMENT						
Description	Manufacturer	Model	Serial Number	FCC ID/ DoC		
Laptop	Lenovo	T460s	PC0JMBF8	Doc		
Laptop AC/DC Adapter	Lenovo	ADLX90NLC2A	11S45N0247Z1ZSHH448JEY	Doc		
USB-A to Ethernet Adapter	Plugable	USB2-E100	8CAE4CE46AFA	Doc		
USB-C to USB-A Female Adapter	Amazon Basics	L6LUC160-CS-R	N/A	Doc		
I/O CABLES (CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	3	AC	Un-shielded	1.25	AC Mains to EUT/Spectrum Analyzer/AC/DC Adapter
2	DC	1	DC	Un-shielded	1	AC/DC Adapter to Laptop
3	Ethernet	1	RJ45	Un-shielded	1.5	Laptop to USB Ethernet Adapter
4	USB-A	1	USB-A	Shielded	0.05	USB EthernetAdapter to USB
5	USB-C	1	USB-C	Shielded	0.05	EUT to USB-C/USB-A Female Adapter
6	SMA Cable	1	SMA	Un-Shielded	0.1	EUT to Spectrum Analyzer
I/O CABLES (RADIATED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	3	AC	Un-shielded	1.25	AC Mains to EUT/Spectrum Analyzer/AC/DC Adapter
2	DC	1	DC	Un-shielded	1	AC/DC Adapter to Laptop
3	Ethernet	1	RJ45	Un-shielded	10	Laptop to USB Ethernet Adapter
4	USB-A	1	USB-A	Shielded	0.05	USB EthernetAdapter to USB
5	USB-C	1	USB-C	Shielded	0.05	EUT to USB-C/USB-A Female Adapter
6	SMA Cable	1	SMA	Un-Shielded	10	EUT to Horn Antenna

TEST SETUP

The EUT is a stand-alone unit and the radio is exercised by Sonos Compliance GUI test utility software via ethernet.

SETUP DIAGRAM

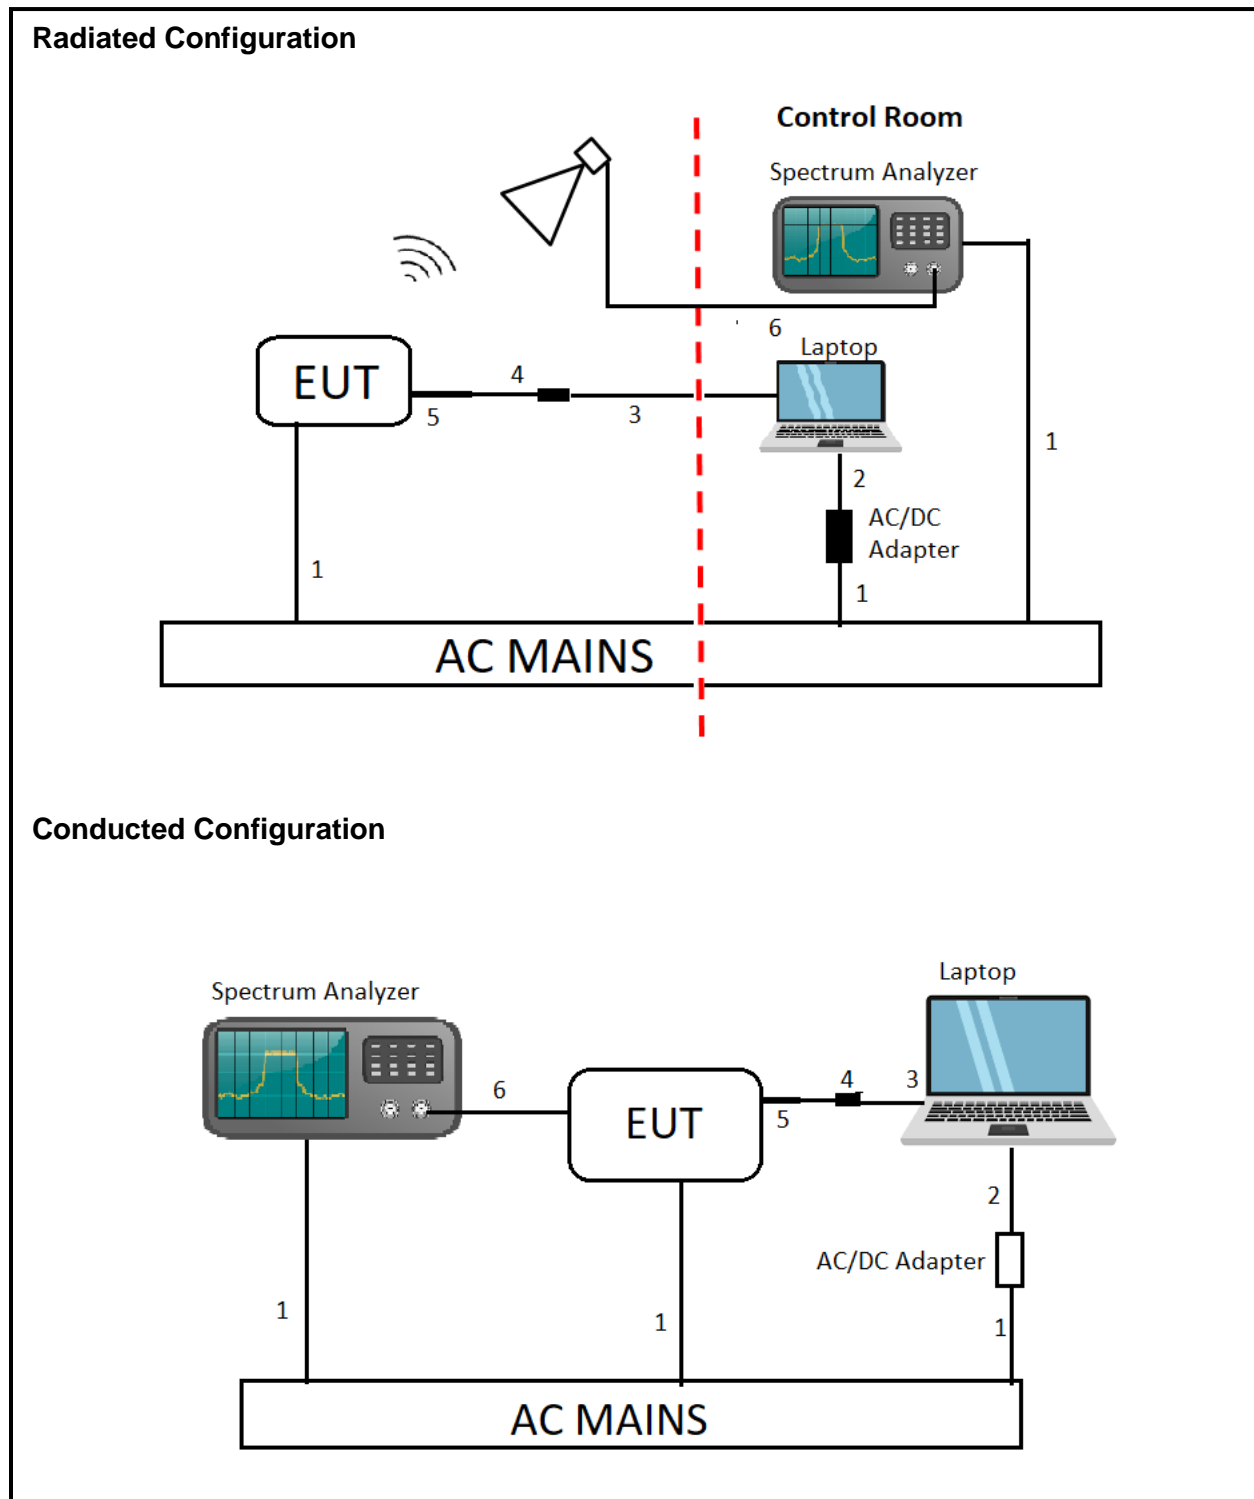

7. MEASUREMENT METHOD

On Time and Duty Cycle: KDB 789033 D02 v02r01, Section II B.

26 dB Emission BW: KDB 789033 D02 v02r01, Section II C.1

99% Occupied Bandwidth: KDB 789033 D02 v02r01, Section II-D

Conducted Output Power: KDB 789033 D02 v02r01, Section II E.2.d (Method SA-2).
(Output Power (e.i.r.p): Radiated EIRP + DCCF = EIRP)
Radiated method made in lieu of conducted measurements

Power Spectral Density (PSD): KDB 789033 D02 v02r01, Section F
Radiated method made in lieu of conducted measurements

Spurious emissions within 5.925-7.125 GHz Band (Emissions Mask): KDB 987594 D02 EMC
Measurement Section II-J

Unwanted emissions in restricted bands: KDB 789033 D02 v02r01, Sections G.3, G.4, G.5, and G.6.

Unwanted emissions in non-restricted bands: KDB 789033 D02 v02r01, Sections G.3, G.4, and G.5.

AC Power Line Conducted Emissions: ANSI C63.10-2013, Section 6.2.

Radiated Spurious Emissions Below 30MHz: ANSI C63.10-2013 Section 6.4

8. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
Antenna, Broadband Hybrid, 30MHz to 3GHz	Sunol Sciences Corp.	JB3	171862	2022-09-28	2021-09-28
Amplifier, 10KHz to 1GHz, 32dB	SONOMA INSTRUMENT	310N	29654	2023-04-24	2022-04-24
Antenna, Horn 1-18GHz	ETS-Lindgren (Cedar Park, Texas)	3117	80404	2022-08-04	2021-08-04
RF Filter Box, 1-18GHz	FREMONT	SAC-L1	171013	2023-03-09	2022-03-09
EMI TEST RECEIVER,	Rohde & Schwarz	ESW44	PRE0179367	2023-02-16	2022-02-16
EMI TEST RECEIVER, with B8 option	Rohde & Schwarz	ESW44	PRE0179377	2023-02-20	2022-02-20
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	201499	2023-02-17	2022-02-17
Antenna, Horn 18 to 26.5GHz	ARA	MWH-1826/B	172363	2023-02-17	2022-02-17
Antenna, Horn 26 to 40GHz	ARA	MWH-2640/B	172366	2022-12-07	2021-12-07
Amplifier 18-26.5GHz, +5Vdc, -54dBm P1dB	AMPLICAL	AMP18G26.5-60	171583	2022-12-07	2021-12-07
Amplifier 26-40GHz +5Vdc, -62dBm P1dB	AMPLICAL	AMP26G40-65	172346	2023-02-01	2022-02-01
*Antenna, Passive Loop 30Hz - 1MHz	ELECTRO METRICS	EM-6871	SC-8015	2022-05-24	2021-05-24
*Antenna, Passive Loop 100KHz - 30MHz	ELECTRO METRICS	EM-6872	SC-8014	2022-05-24	2021-05-24
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent Technologies	N9030A	80396	2023-01-02	2021-01-02
AC Line Conducted					
LISN	Fischer Custom Communications, Inc	FCC-LISN-50/250-25-2-01-480V	175765	2023-01-26	2022-01-26
EMI TEST RECEIVER	Rohde & Schwarz	ESR	93091	2023-02-21	2022-02-21
*Transient Limiter	TE	TBFL1	207996	2022-06-01	2021-06-01
UL TEST SOFTWARE LIST					
Radiated Software	UL	UL EMC	Ver 2016-05-11, 2015-12-29, 2019-10-09, 2021-12-07, 2022-05-18, and 2022-07-06		
Antenna Port Software	UL	UL RF	Ver 2022.8.16		
AC Line Conducted Software	UL	UL EMC	Rev 9.5, 2022-02-17		

*Test performed prior to expiration

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

KDB 789033 Zero-Span Spectrum Analyzer Method.

Test Engineer:	AF 19497
Test Date:	5/11/2022

RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
802.11a	1.394	1.768	0.789	78.89%	1.03	0.717

DUTY CYCLE PLOTS



9.2. 26 dB BANDWIDTH

LIMITS

§15.407 (a) (10)

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.



RESULTS

9.2.1. 802.11a MODE 2TX IN THE UNII-5 BAND



2TX Antenna 1 + Antenna 4 CDD MODE:

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 1 (MHz)	26 dB Bandwidth Antenna 4 (MHz)
Low	5955	28.48	26.36
Mid	6175	28.36	25.40
High	6415	28.20	24.68



LOW CHANNEL

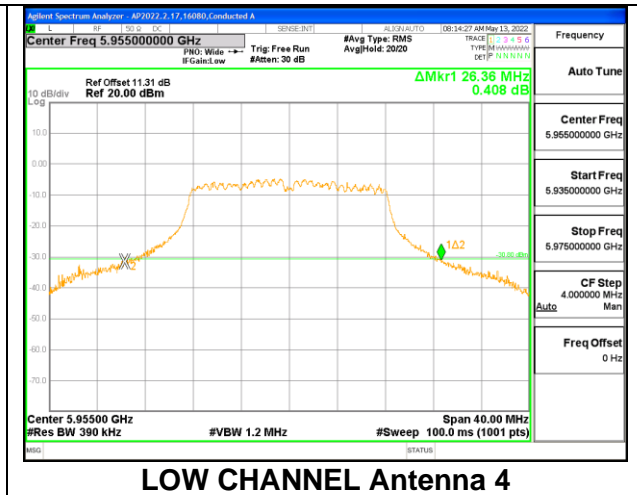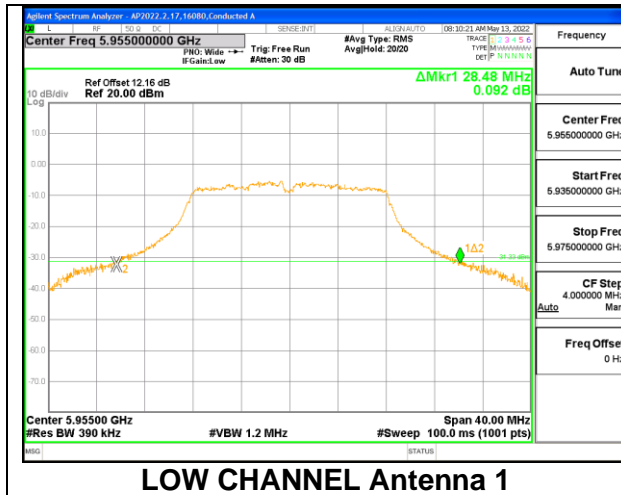

MID CHANNEL

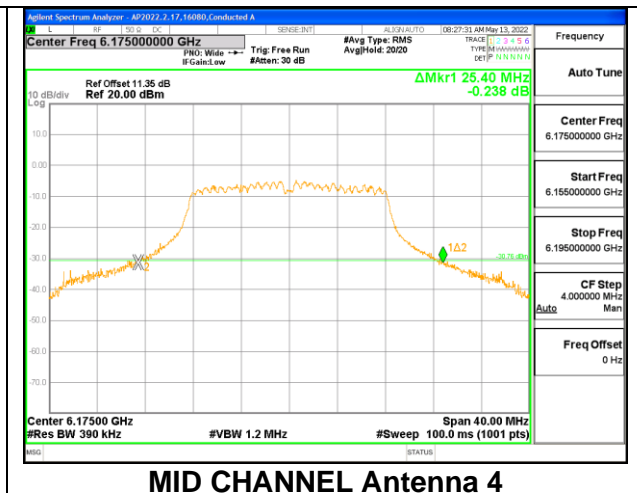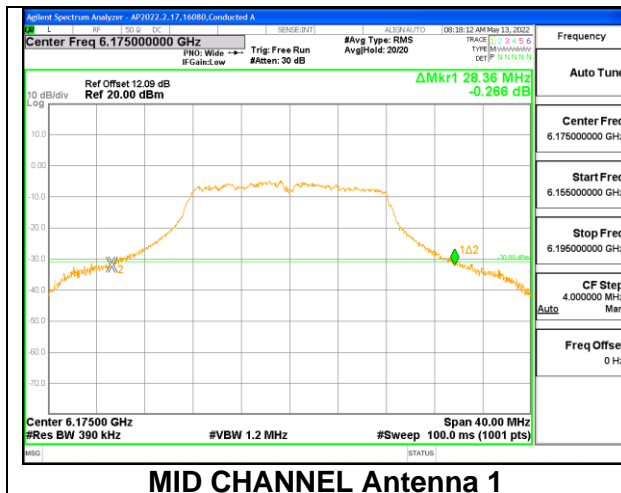

HIGH CHANNEL

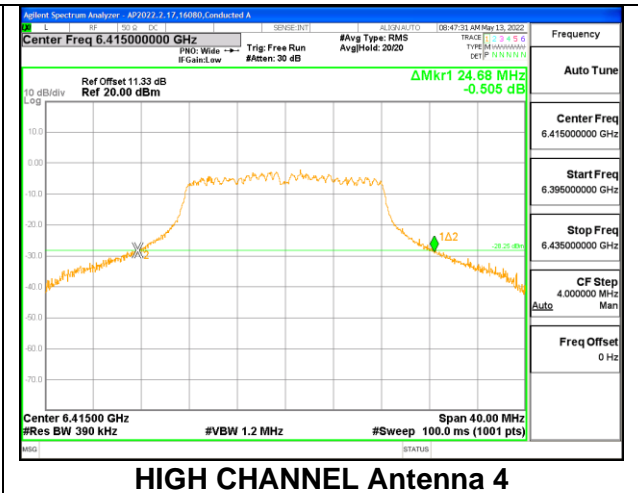
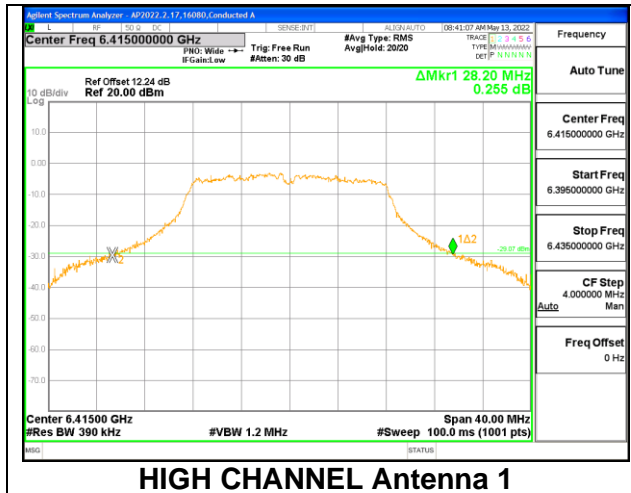


9.2.2. 802.11a MODE 2TX IN THE UNII-6 BAND



2TX Antenna 1 + Antenna 4 CDD MODE:

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 1 (MHz)	26 dB Bandwidth Antenna 4 (MHz)
Low	6435	27.72	26.44
Mid	6475	28.60	25.48
High	6515	28.80	26.04



LOW CHANNEL

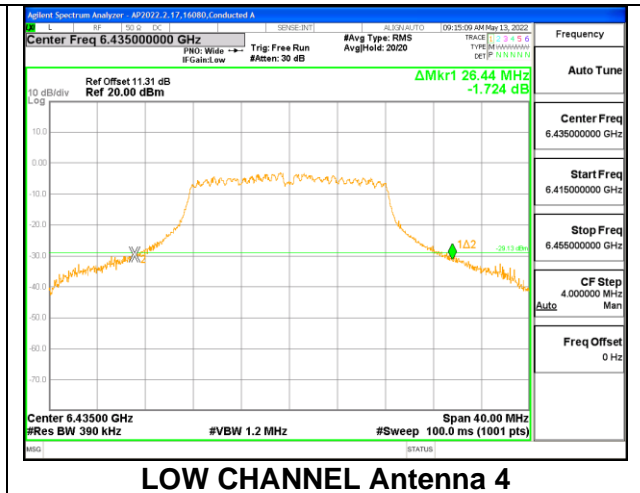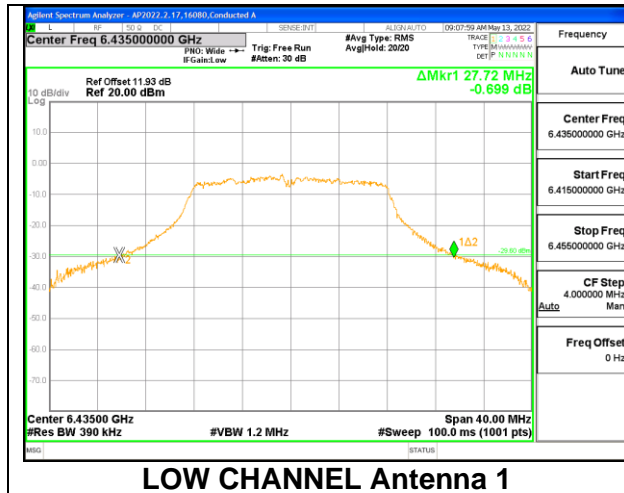

MID CHANNEL

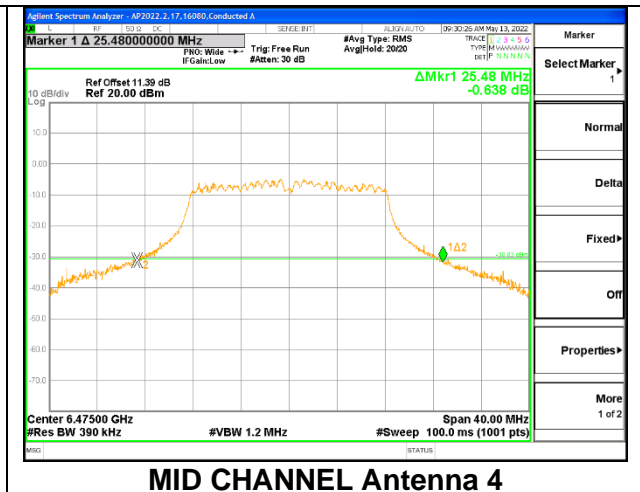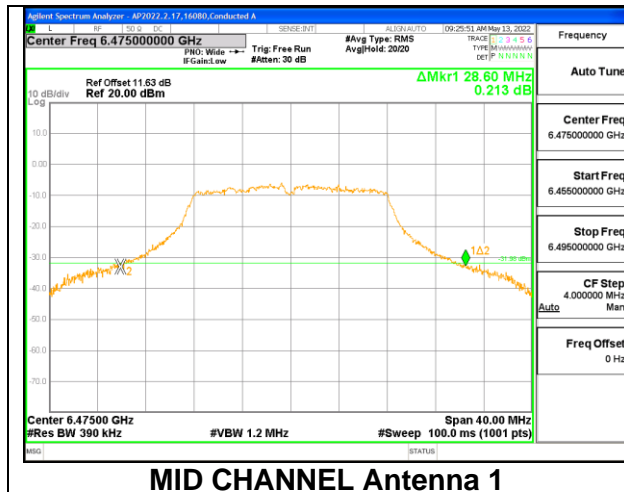

HIGH CHANNEL

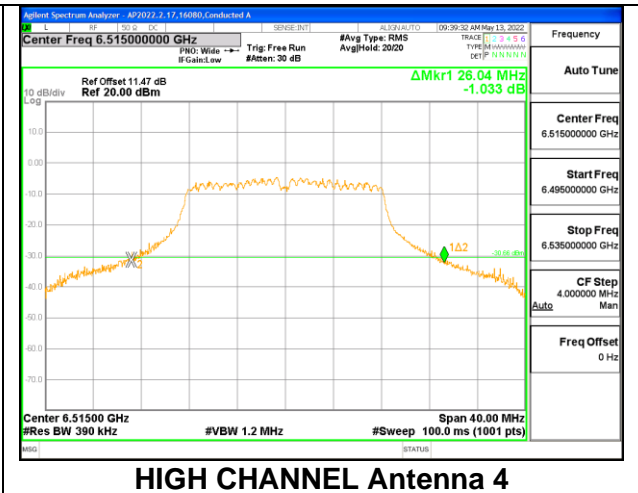
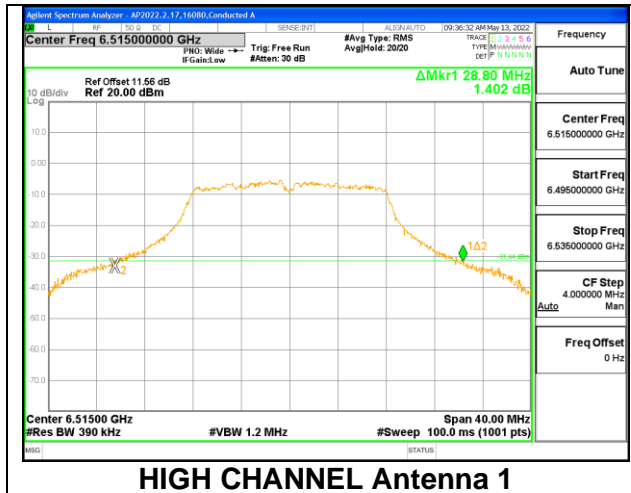


9.2.3. 802.11a MODE 2TX IN THE UNII-7 BAND



2TX Antenna 1 + Antenna 4 CDD MODE:

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 1 (MHz)	26 dB Bandwidth Antenna 4 (MHz)
Low	6535	28.92	25.28
Mid	6715	29.16	26.60
High	6855	28.48	26.16
Straddle	6875	28.60	26.68



LOW CHANNEL

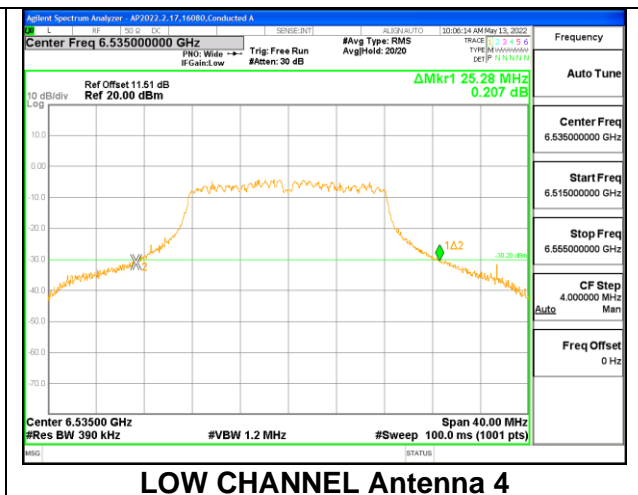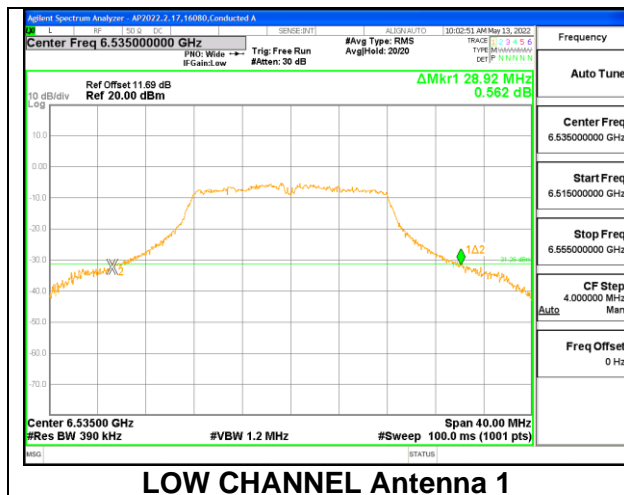



MID CHANNEL

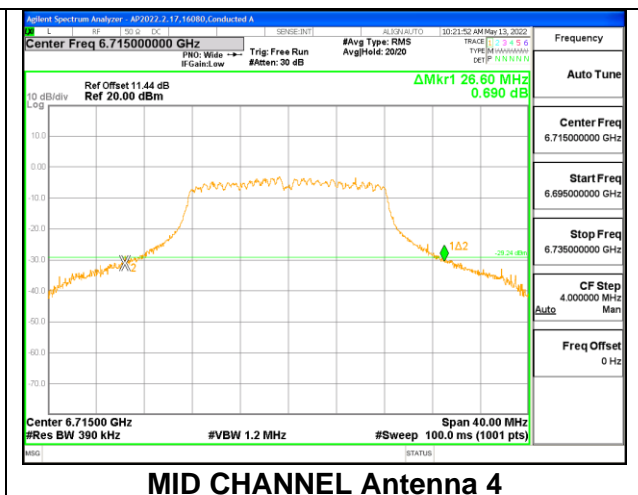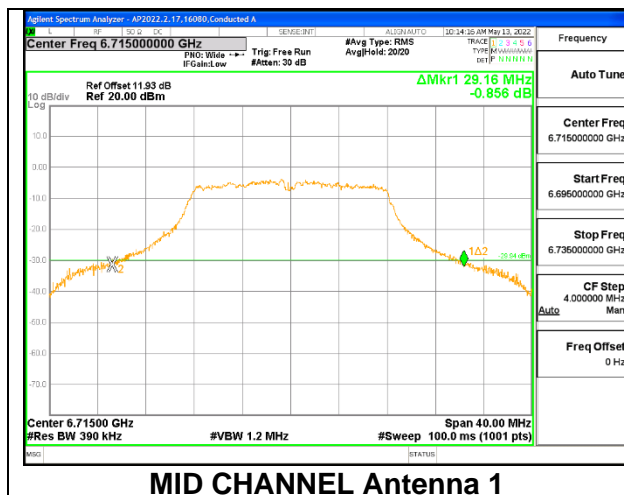

HIGH CHANNEL

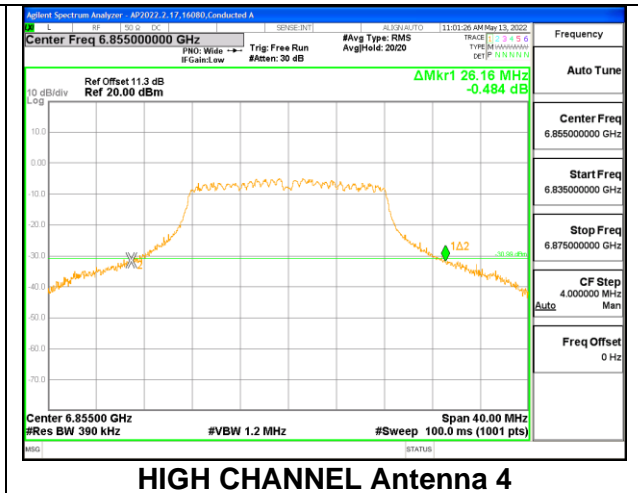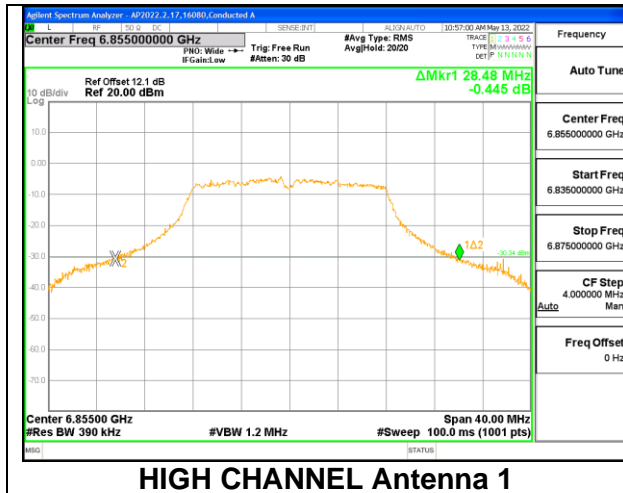

STRADDLE CHANNEL

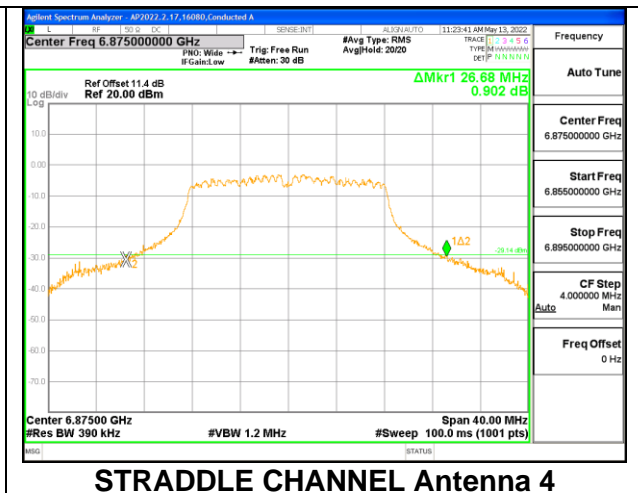
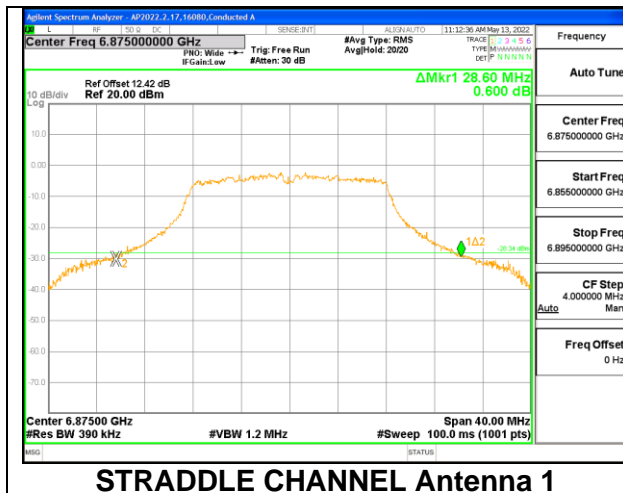


9.2.4. 802.11a MODE 2TX IN THE UNII-8 BAND



2TX Antenna 1 + Antenna 4 CDD MODE:

Channel	Frequency (MHz)	26 dB Bandwidth Antenna 1 (MHz)	26 dB Bandwidth Antenna 4 (MHz)
Low	6895	28.32	25.68
Mid	6995	28.48	25.52
High	7115	28.28	25.20



LOW CHANNEL

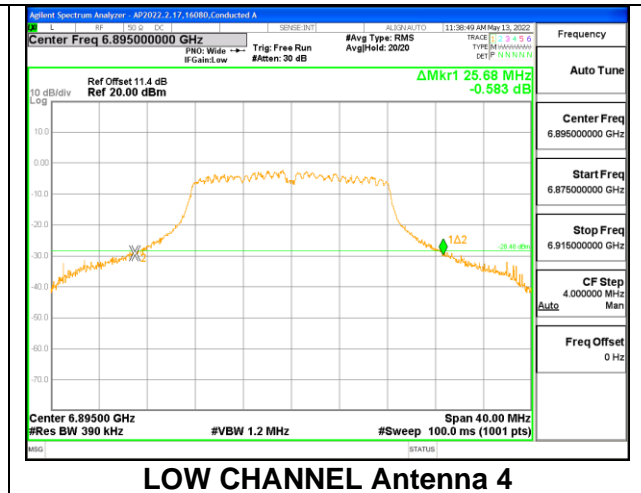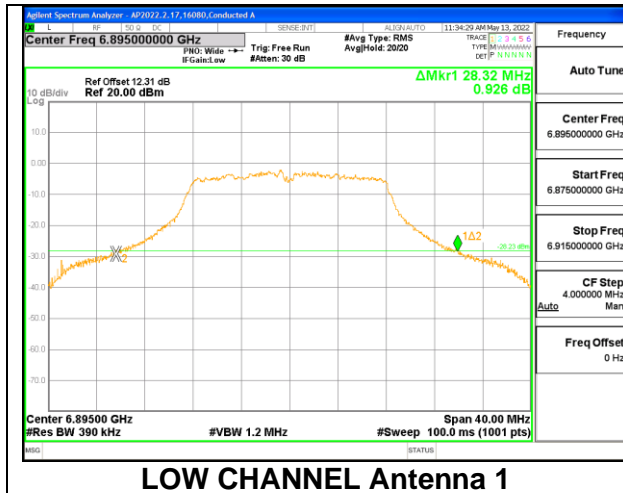

MID CHANNEL

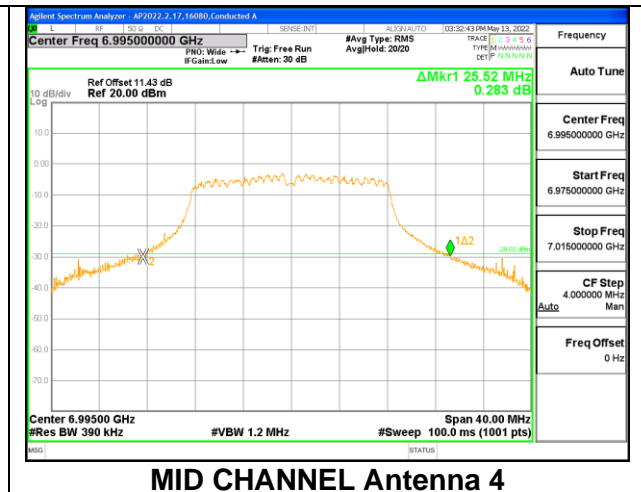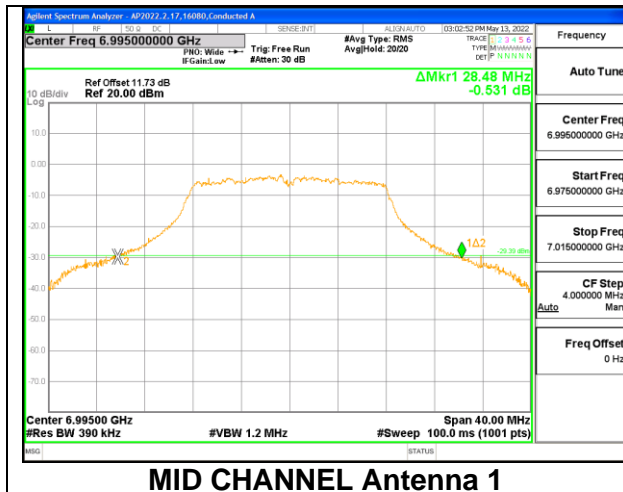

HIGH CHANNEL

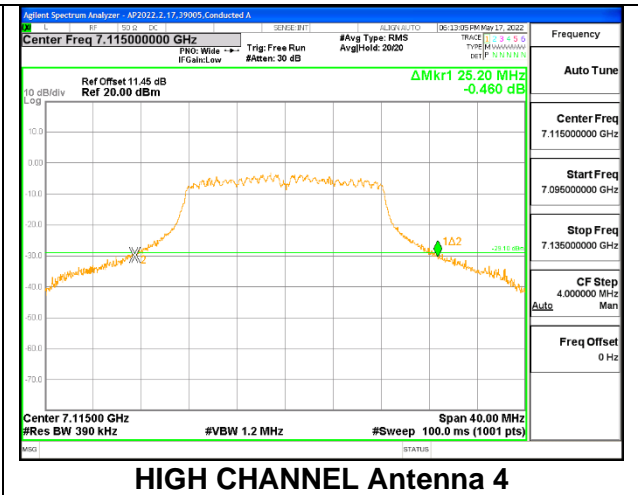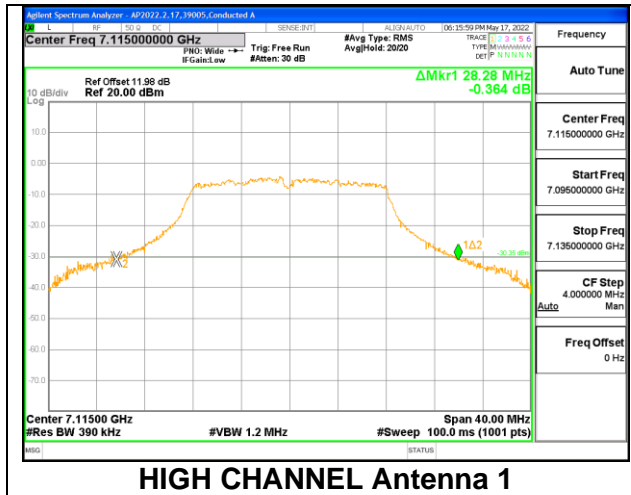

9.3. 99% BANDWIDTH

LIMITS

FCC -None; for reporting purposes only.

RSS-248 4.4

The occupied bandwidth shall not exceed 320 MHz.



RESULTS

9.3.1. 802.11a MODE 2TX IN THE UNII-5 BAND



2TX Antenna 1 + Antenna 4 CDD MODE:

Channel	Frequency (MHz)	99% Bandwidth Antenna 1 (MHz)	99% Bandwidth Antenna 4 (MHz)
Low	5955	16.784	16.851
Mid	6175	17.001	16.791
High	6415	16.911	16.810



LOW CHANNEL

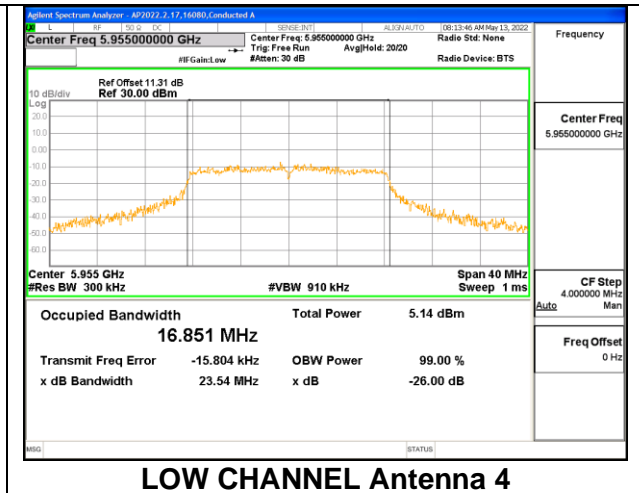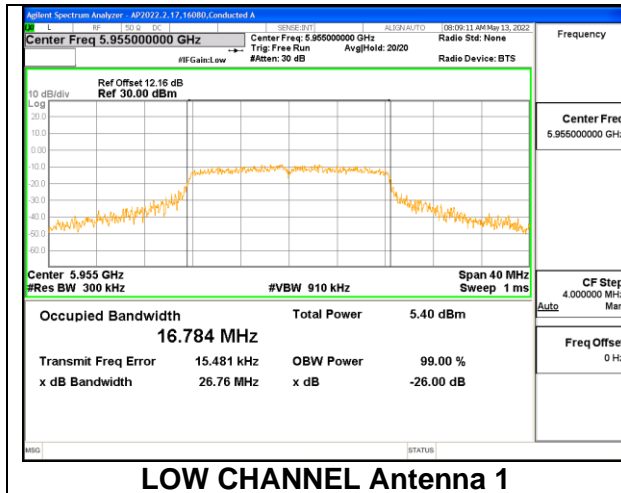

MID CHANNEL

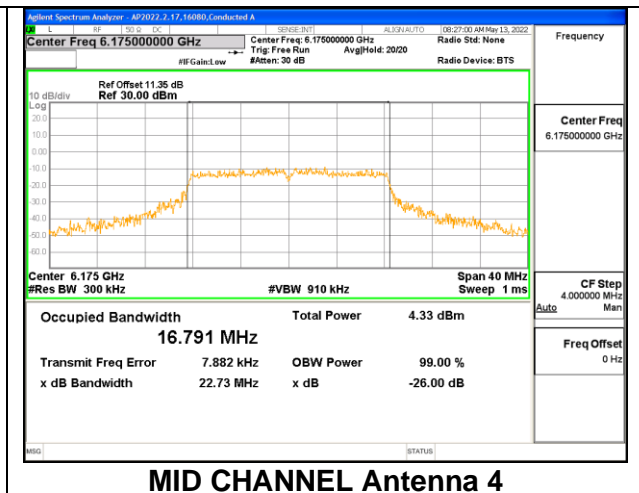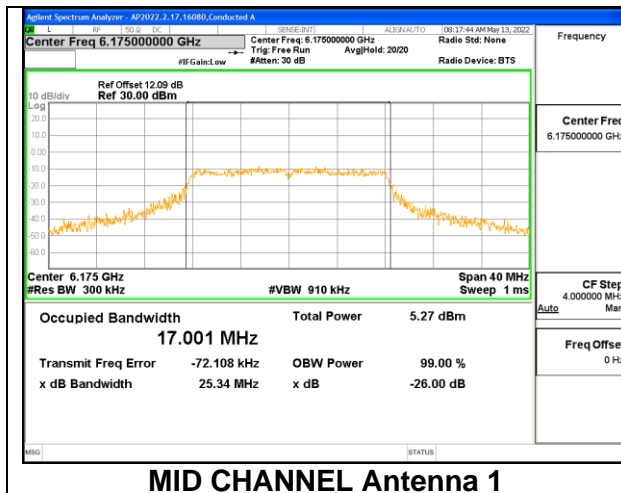

HIGH CHANNEL

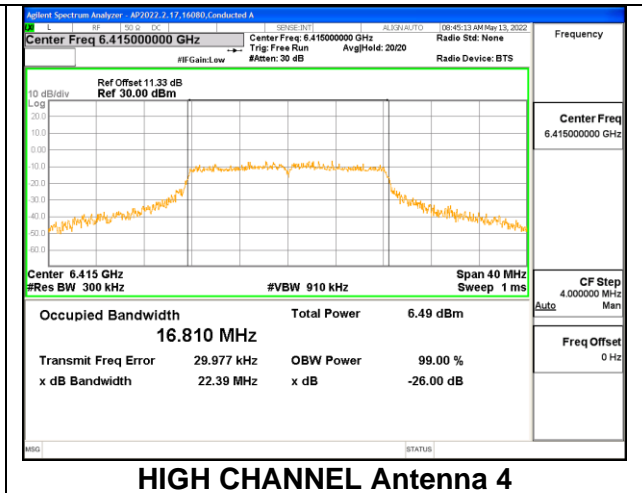
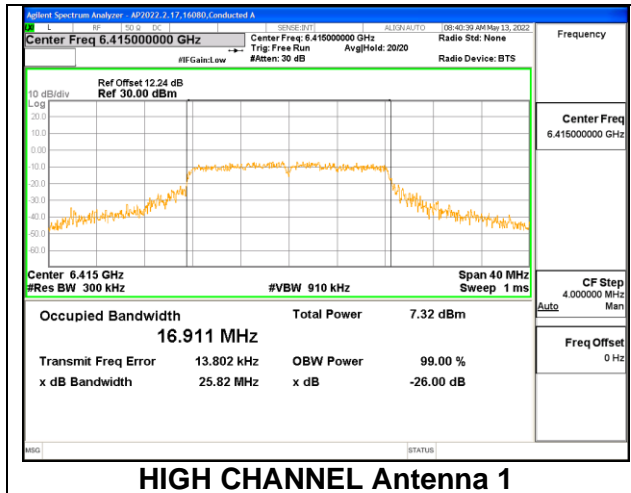


9.3.2. 802.11a MODE 2TX IN THE UNII-6 BAND



2TX Antenna 1 + Antenna 4 CDD MODE:

Channel	Frequency (MHz)	99% Bandwidth Antenna 1 (MHz)	99% Bandwidth Antenna 4 (MHz)
Low	6435	16.949	16.703
Mid	6475	16.935	16.801
High	6515	16.848	16.766


LOW CHANNEL

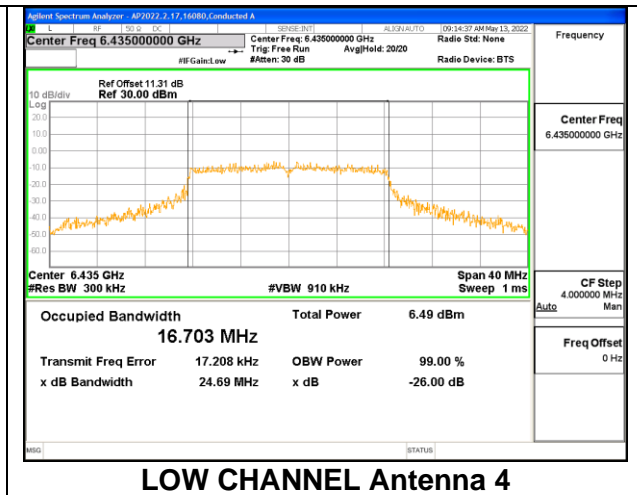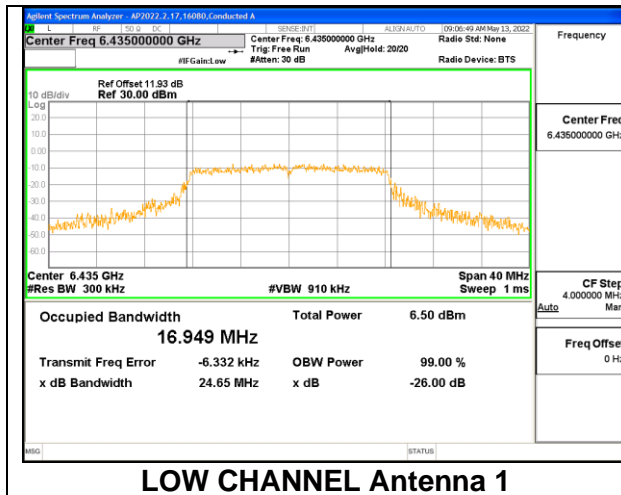

MID CHANNEL

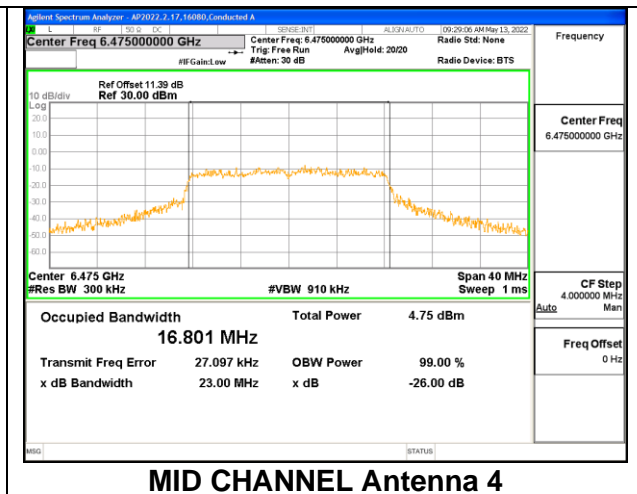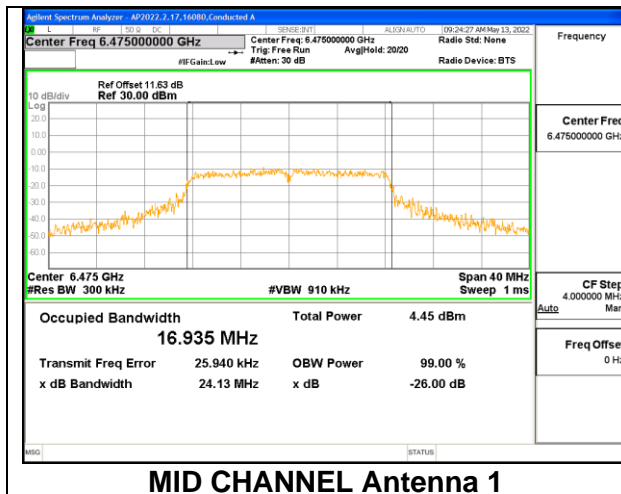

HIGH CHANNEL


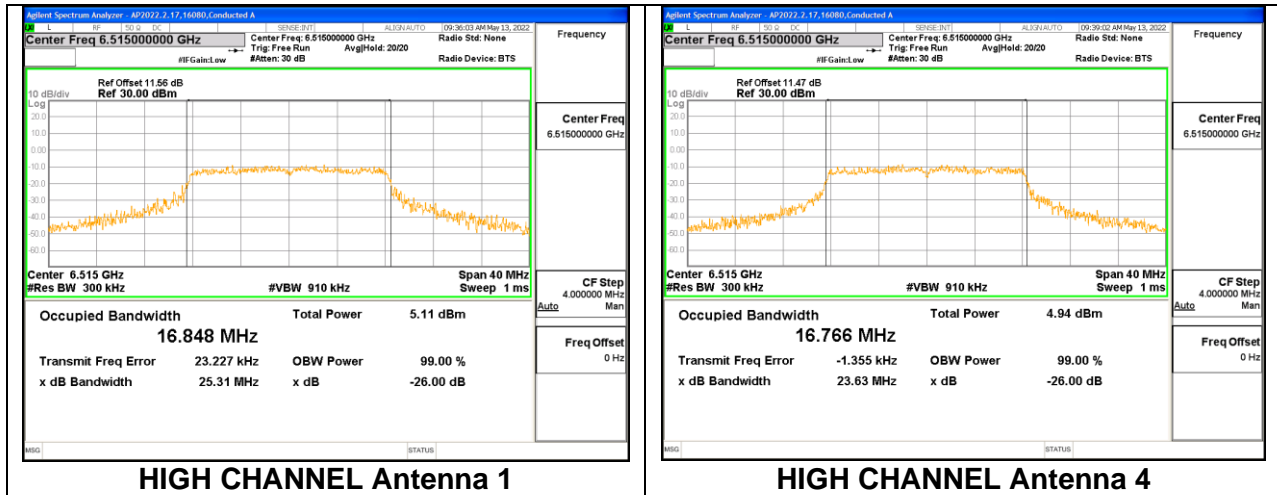


9.3.3. 802.11a MODE 2TX IN THE UNII-7 BAND



2TX Antenna 1 + Antenna 4 CDD MODE:

Channel	Frequency (MHz)	99% Bandwidth Antenna 1 (MHz)	99% Bandwidth Antenna 4 (MHz)
Low	6535	16.985	16.754
Mid	6715	16.825	16.750
High	6855	16.852	16.850
Straddle	6875	16.991	16.812



LOW CHANNEL

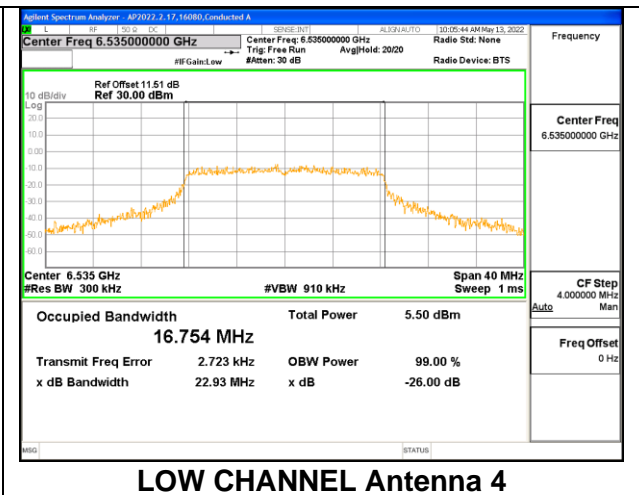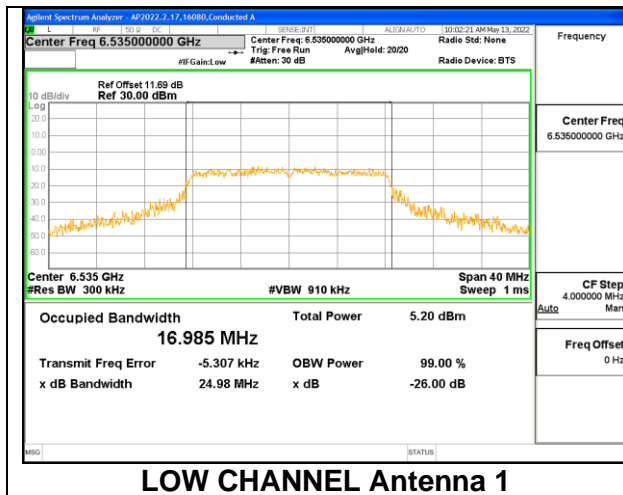



MID CHANNEL

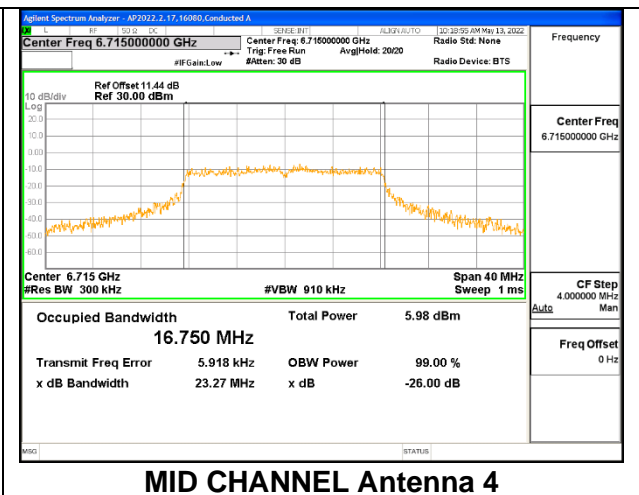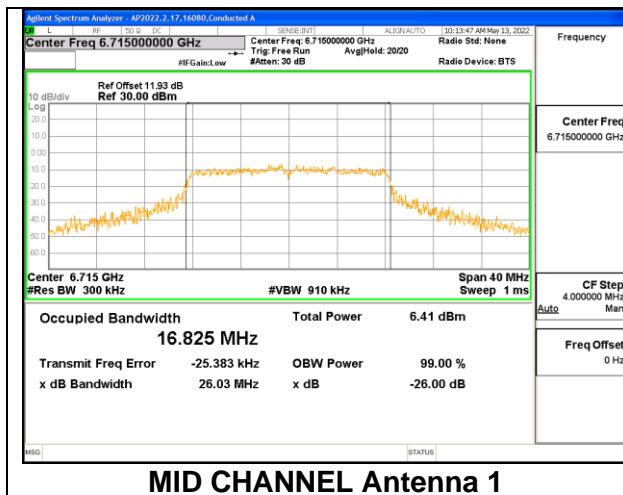

HIGH CHANNEL

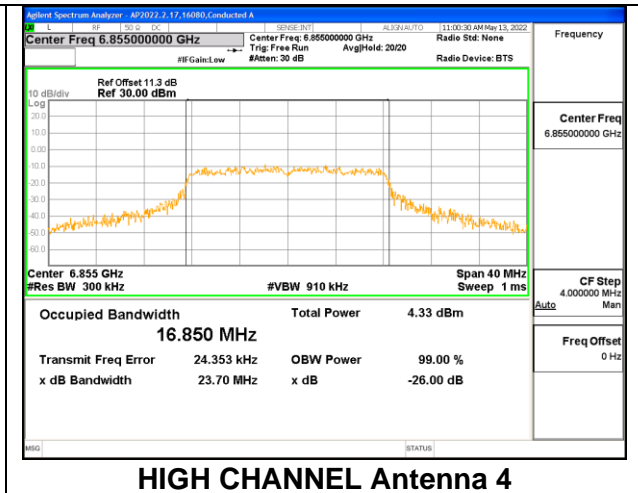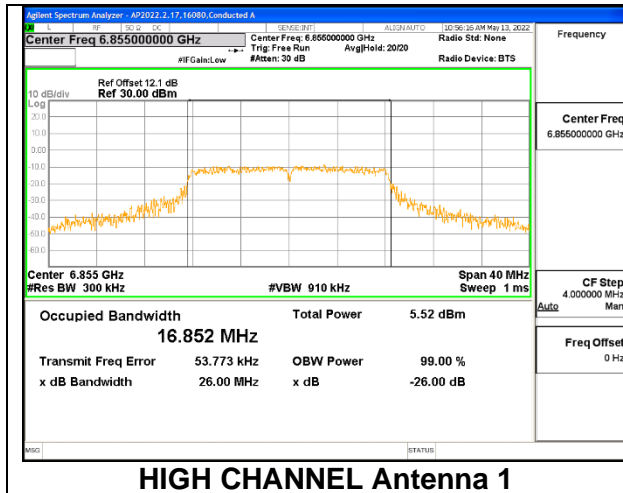

STRADDLE CHANNEL

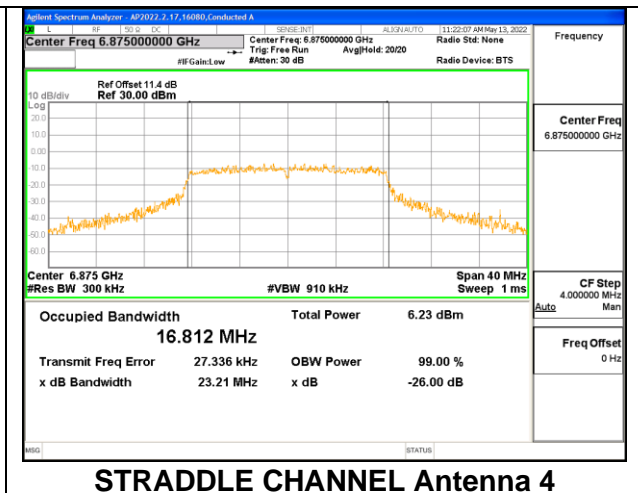
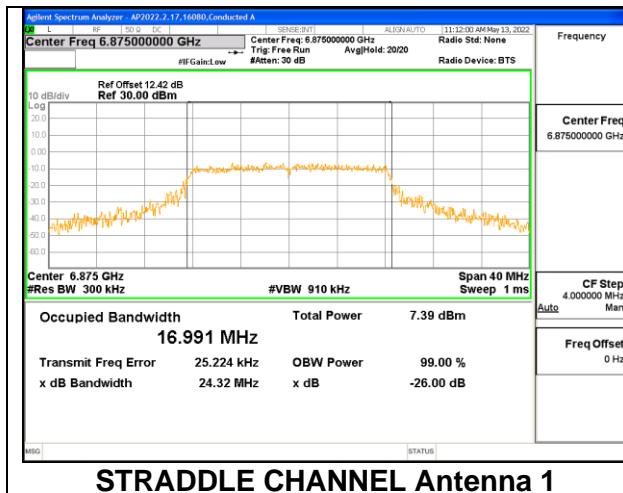


9.3.4. 802.11a MODE 2TX IN THE UNII-8 BAND



2TX Antenna 1 + Antenna 4 CDD MODE:

Channel	Frequency (MHz)	99% Bandwidth Antenna 1 (MHz)	99% Bandwidth Antenna 4 (MHz)
Low	6895	16.908	16.716
Mid	6995	16.946	16.727
High	7115	16.786	16.787


LOW CHANNEL

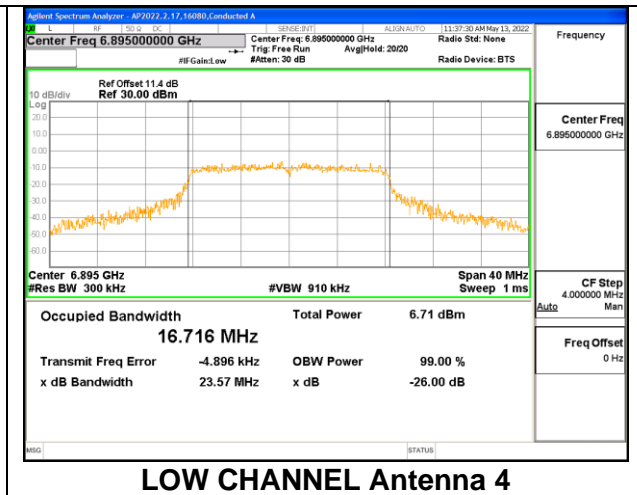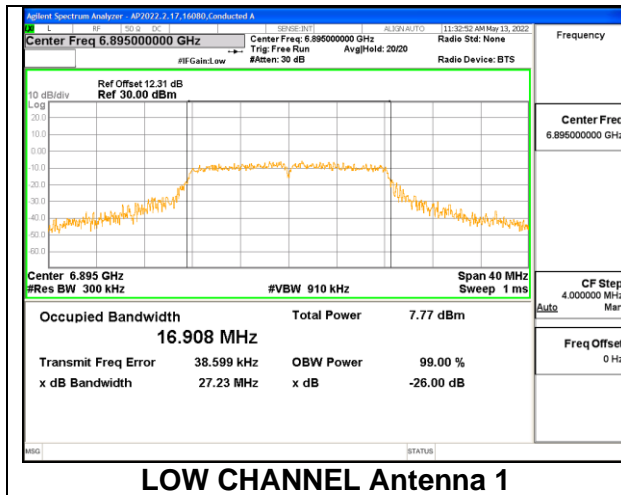

MID CHANNEL

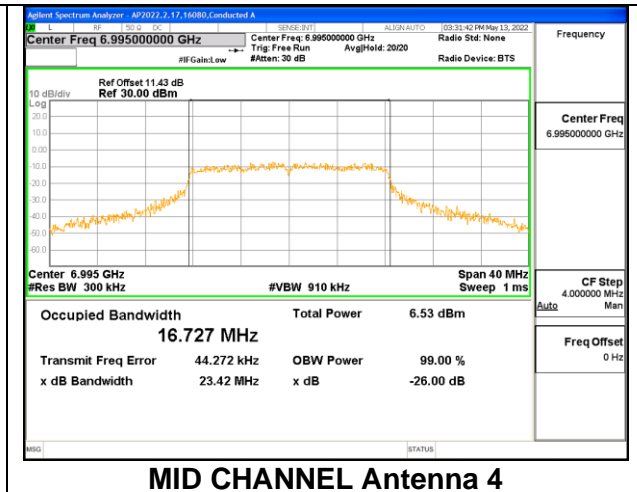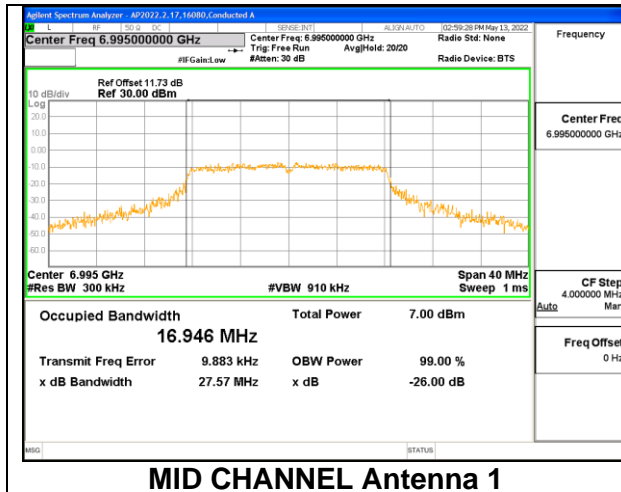

HIGH CHANNEL

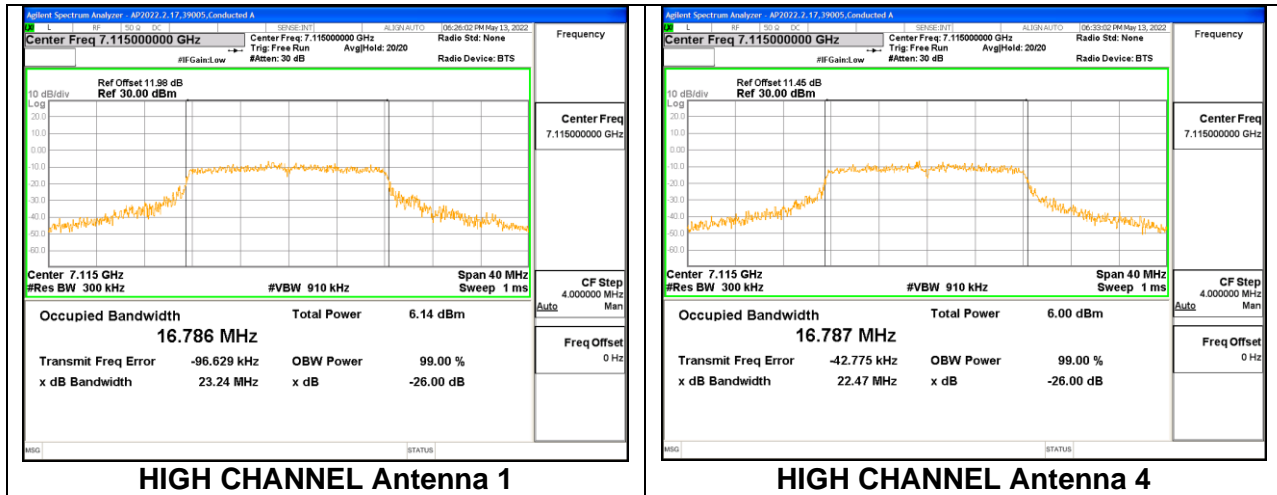

9.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407(a)

Band 5.925-7.125 GHz

(8) For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum power spectral density must not exceed -1 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

RSS 248

4.6.3. Power limits for client devices

The following limits shall apply to client devices:

- a. the maximum e.i.r.p. spectral density shall not exceed -1 dBm/MHz; and
- b. the maximum e.i.r.p. shall not exceed 24 dBm/occupied bandwidth.

TEST PROCEDURE

The measurement method used for output power is KDB 789033 D02 v02r01, Section E.2.d (Method SA-2) was used.

The measurement method used for power spectral density is KDB 789033 D02 v02r01, Section F.

The power output and power density were measured by radiated method in lieu of conducted measurements. Turn table, antenna and polarization were maximized for this method.

Effective Isotropic Radiated Power Calculated as follows:

Measured Transmitter Power (dBm) + Free Space Path Loss at 3 Meter (dB) + Measurement Antenna Gain (dBi) + Preamp Gain (dB) + Duty Cycle Correction Factor (dB) = EIRP (dBm)

Sample Calculation: -36.09 dBm + 57.48 dB – 10.337 dBi – 5.46 dB + 1.03 dB = 6.62 dBm

Note: Same calculation is used for both total channel power and power spectral density measurements. The only difference is the measurement bandwidths.

RESULTS

9.4.1. 802.11a MODE 2TX IN THE UNII-5 BAND

2TX Antenna 1 + Antenna 4 CDD MODE:

Test Engineer:	AF 19497
Test Date:	5/11/2022

(NOTE: **POWER** and **PSD** were tested by radiated method)




Duty Cycle CF (dB)	1.03	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas EIRP Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	5955	5.59	6.62	24.00	-17.38
Mid	6175	5.85	6.88	24.00	-17.12
High	6415	6.64	7.67	24.00	-16.33

PSD Results

Channel	Frequency (MHz)	Meas EIRP PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5955	-2.78	-1.75	-1.00	-0.75
Mid	6175	-2.53	-1.50	-1.00	-0.50
High	6415	-2.48	-1.45	-1.00	-0.45

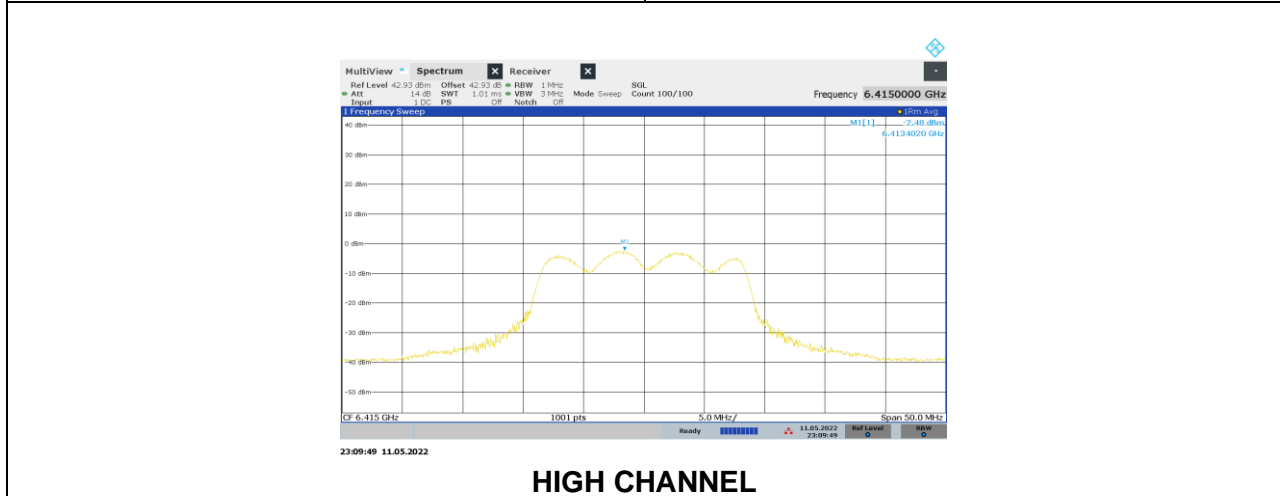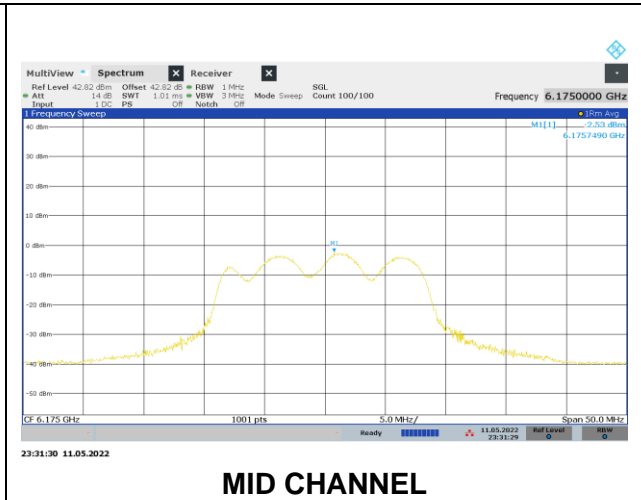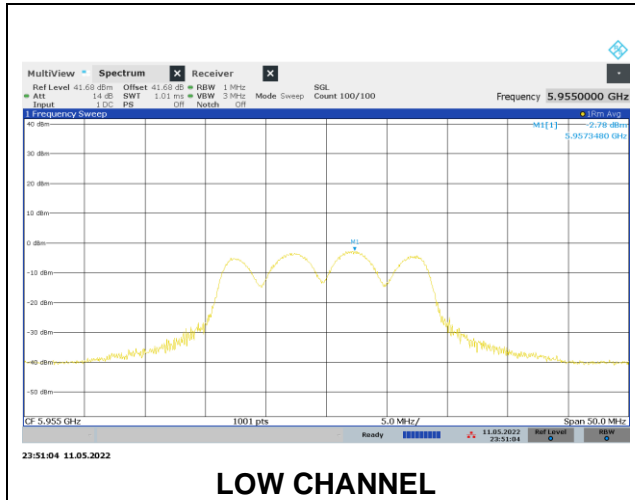

9.4.2. 802.11a MODE 2TX IN THE UNII-6 BAND

2TX Antenna 1 + Antenna 4 CDD MODE:

Test Engineer:	CW 20756
Test Date:	5/11/2022

(NOTE: **POWER** and **PSD** were tested by radiated method)




Duty Cycle CF (dB)	1.03	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas EIRP Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6435	5.68	6.71	24.00	-17.29
Mid	6475	5.15	6.18	24.00	-17.82
High	6515	6.65	7.68	24.00	-16.32

PSD Results

Channel	Frequency (MHz)	Meas EIRP PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	6435	-2.84	-1.81	-1.00	-0.81
Mid	6475	-2.53	-1.50	-1.00	-0.50
High	6515	-2.51	-1.48	-1.00	-0.48

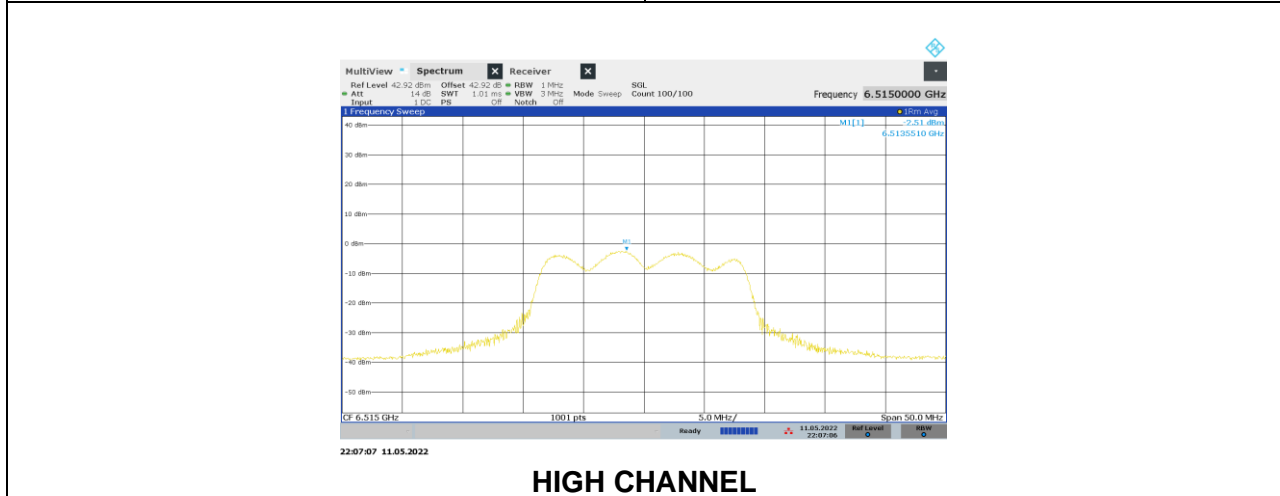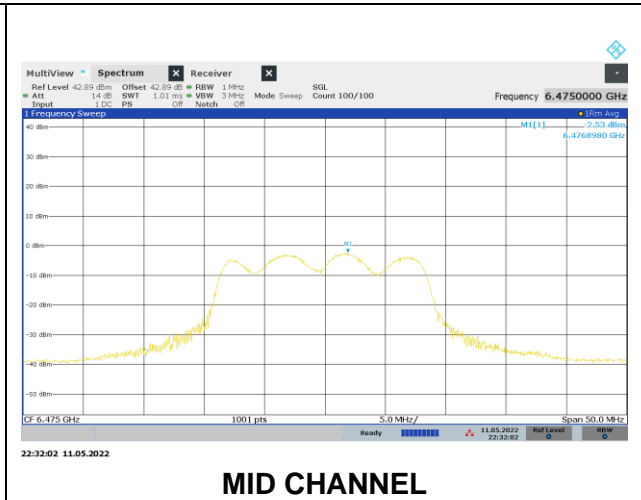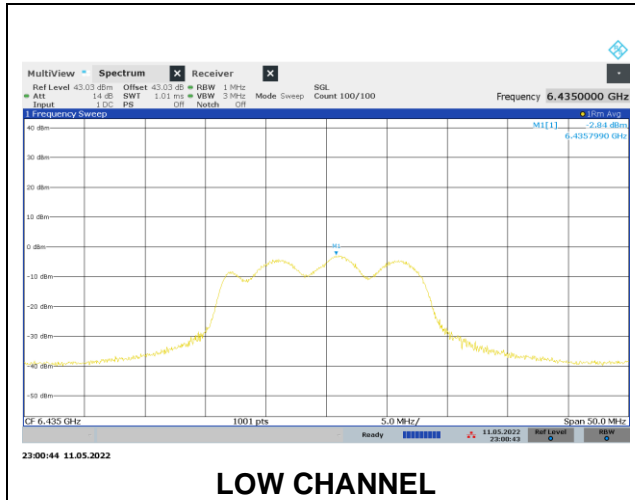

9.4.3. 802.11a MODE 2TX IN THE UNII-7 BAND

2TX Antenna 1 + Antenna 4 CDD MODE:

Test Engineer:	AF 19497
Test Date:	5/11/2022

(NOTE: **POWER** and **PSD** were tested by radiated method)


Duty Cycle CF (dB)	1.03	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---

Output Power Results


Channel	Frequency (MHz)	Meas EIRP Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6535	5.53	6.56	24.00	-17.44
Mid	6715	6.06	7.09	24.00	-16.91
High	6855	5.00	6.03	24.00	-17.97
Straddle	6875	5.32	6.35	24.00	-17.66

PSD Results


Channel	Frequency (MHz)	Meas EIRP PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	6535	-2.44	-1.41	-1.00	-0.41
Mid	6715	-2.58	-1.55	-1.00	-0.55
High	6855	-2.71	-1.68	-1.00	-0.68
Straddle	6875	-2.52	-1.49	-1.00	-0.49

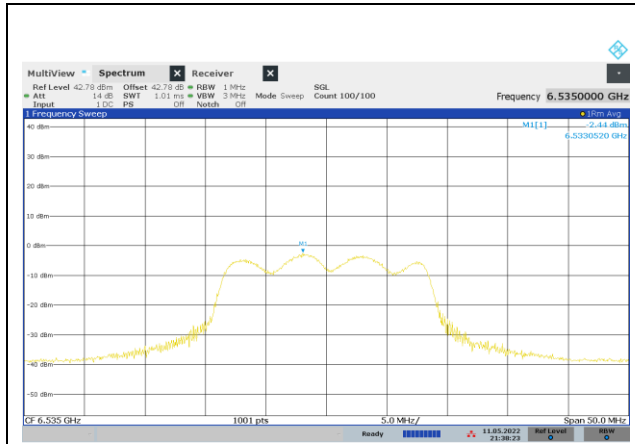


LOW CHANNEL

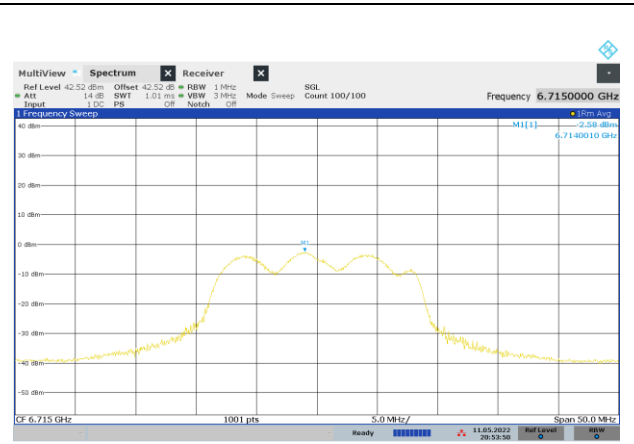

MID CHANNEL

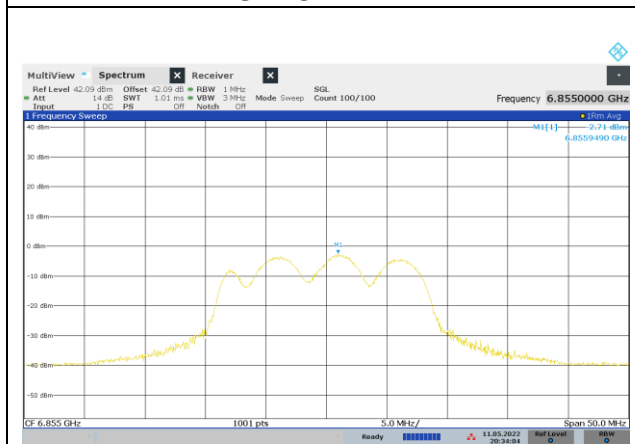

HIGH CHANNEL

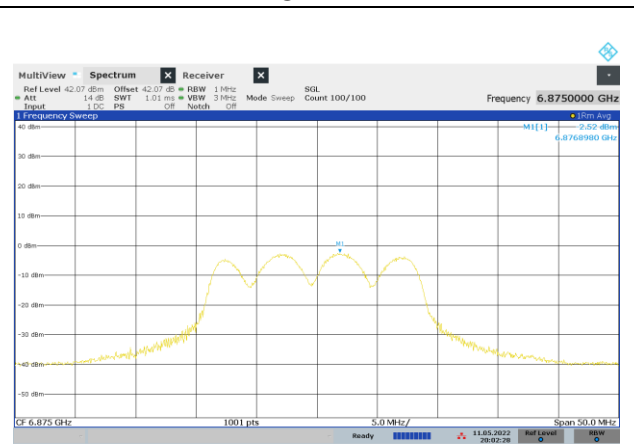

STRADDLE CHANNEL

9.4.4. 802.11a MODE 2TX IN THE UNII-8 BAND

2TX Antenna 1 + Antenna 4 CDD MODE:

Test Engineer:	AF 19497
Test Date:	5/11/2022

(NOTE: **POWER** and **PSD** were tested by radiated method)




Duty Cycle CF (dB)	1.03	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas EIRP Power (dBm)	Total Corr'd EIRP (dBm)	Power Limit EIRP (dBm)	Power Margin (dB)
Low	6895	5.80	6.83	24.00	-17.17
Mid	6995	6.38	7.41	24.00	-16.59
High	7115	6.30	7.33	24.00	-16.67

PSD Results

Channel	Frequency (MHz)	Meas EIRP PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	6895	-2.50	-1.47	-1.00	-0.47
Mid	6995	-2.61	-1.58	-1.00	-0.58
High	7115	-2.48	-1.45	-1.00	-0.45

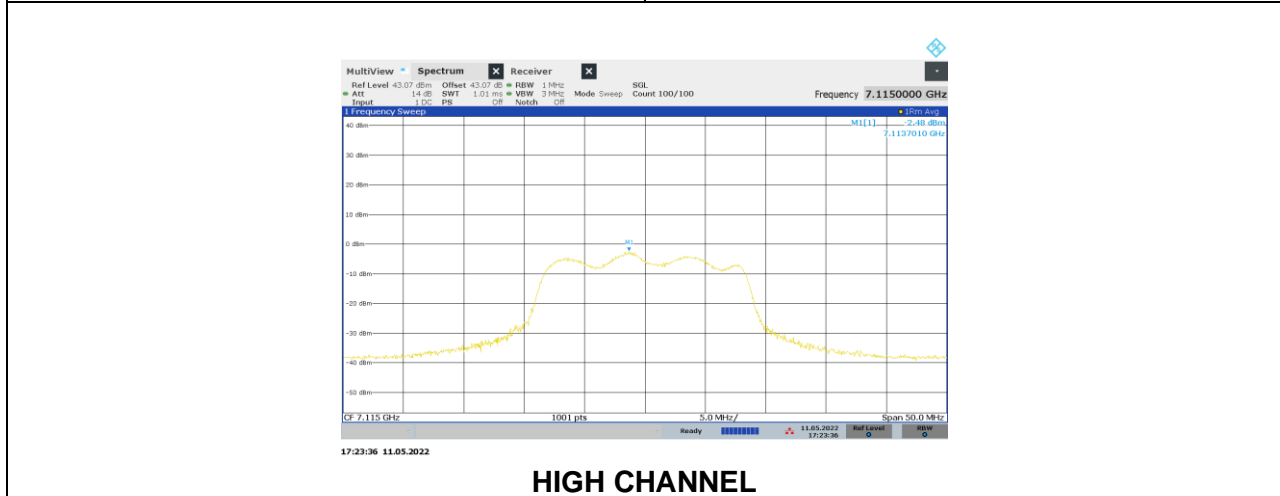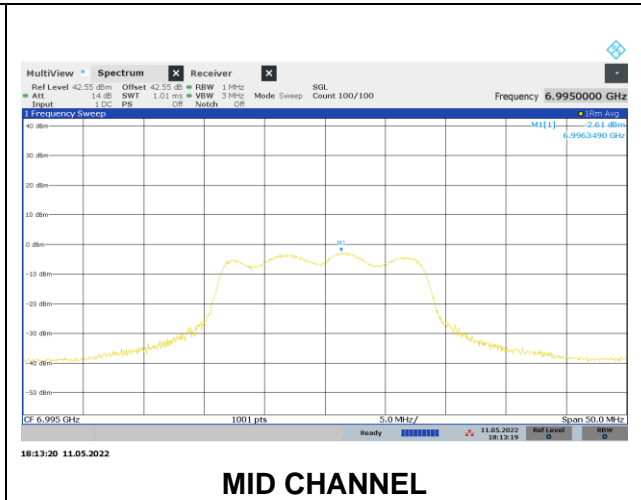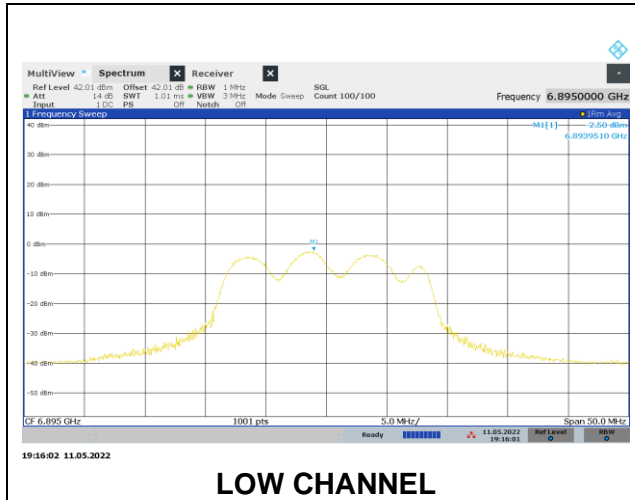

9.5. SPURIOUS EMISSIONS IN-BAND – EMISSION MASK

LIMITS

FCC §15.407

(b)(7) For transmitters operating within the 5.925-7.125 GHz bands: power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

RSS-248

4.7.2 b. e.i.r.p. spectral density of unwanted emissions falling into the 5925-7125 MHz band shall be attenuated (in dB) below the reference power spectral density by:

- i. 20 dB at 1 MHz away from the channel edge; and
- ii. a linearly interpolated value between 20 dB and 28 dB at frequencies between 1 MHz outside of channel edge and one (1) channel bandwidth from the operating channel centre, respectively; and
- iii. 28 dB at one (1) channel bandwidth away from the operating channel centre; and
- iv. a linearly interpolated value between 28 dB and 40 dB at frequencies between one (1) channel bandwidth from the channel centre and one- and one-half (1.5) times the channel bandwidth away from the operating channel centre, respectively; and
- v. 40 dB at one- and one-half (1.5) times the channel bandwidth away from the channel centre; and
- vi. a minimum of 40 dB at frequencies that are further away than one and one-half (1.5) times the channel bandwidth from the channel centre.

TEST PROCEDURE

Per KDB 987594 D02 v01r01, Section J

RESULTS

9.5.1. 802.11a MODE 2TX IN THE UNII-5 BAND

2TX Antenna 1 + Antenna 4 CDD MODE:



9.5.2. 802.11a MODE 2TX IN THE UNII-6 BAND

2TX Antenna 1 + Antenna 4 CDD MODE:

