


VERTICAL RESULT

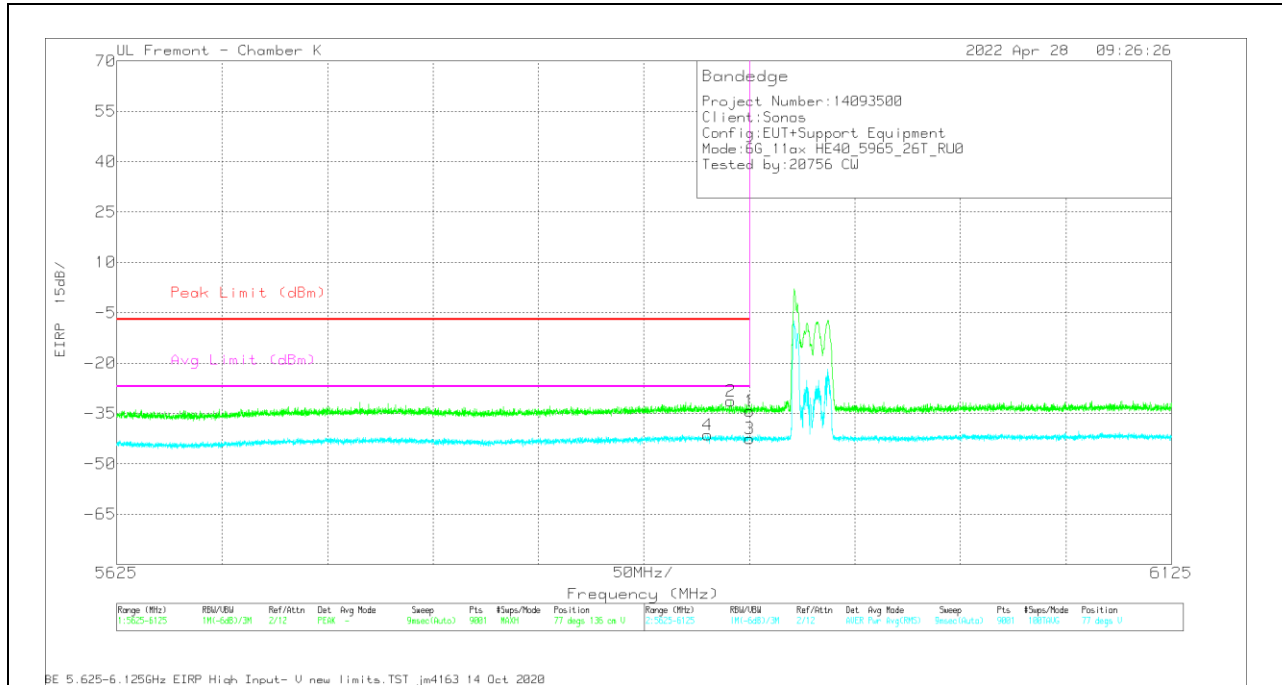



Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF 80404 (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5925	-75.49	PK	35.3	-5.8	11.8	0	-34.19	-7	-27.19	-	-	77	136	V
2	5916.28	-72.65	PK	35.3	-5.8	11.8	0	-31.35	-7	-24.35	-	-	77	136	V
3	5925	-85.77	RMS	35.3	-5.8	11.8	2.01	-42.46	-	-	-27	-15.46	77	136	V
4	5905.113	-84.81	RMS	35.3	-5.7	11.8	2.01	-41.4	-	-	-27	-14.4	77	136	V

Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

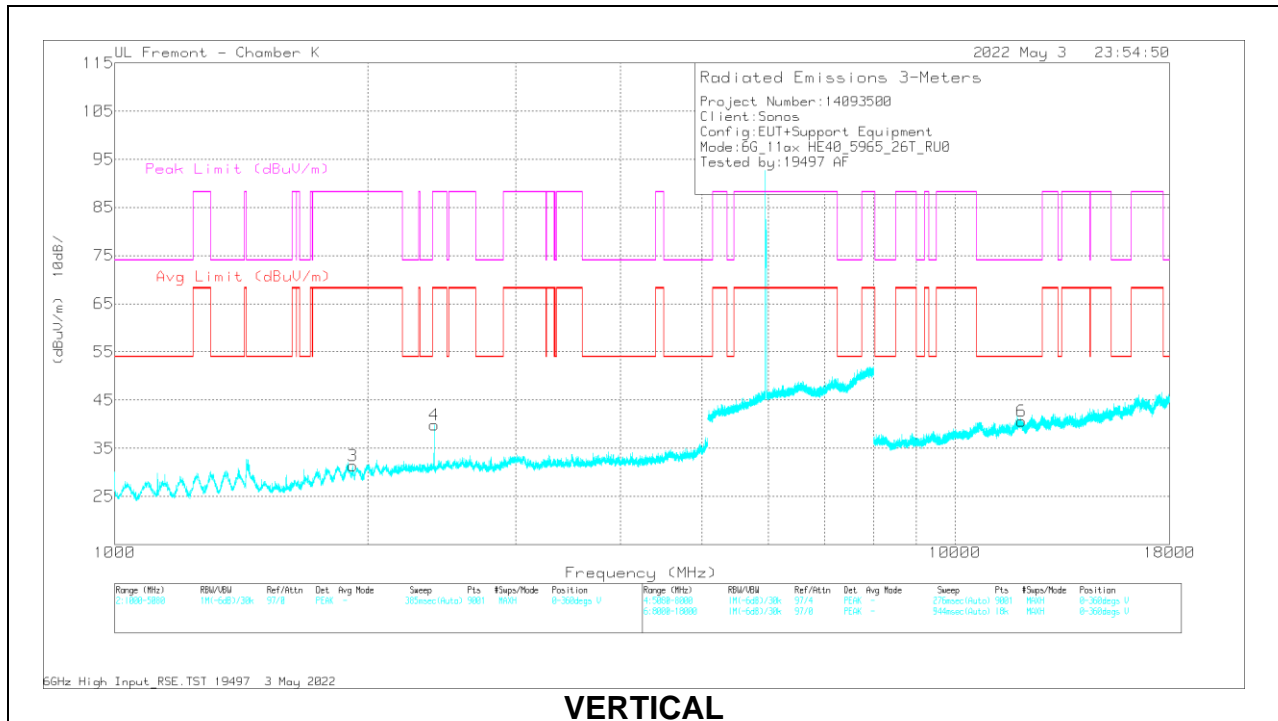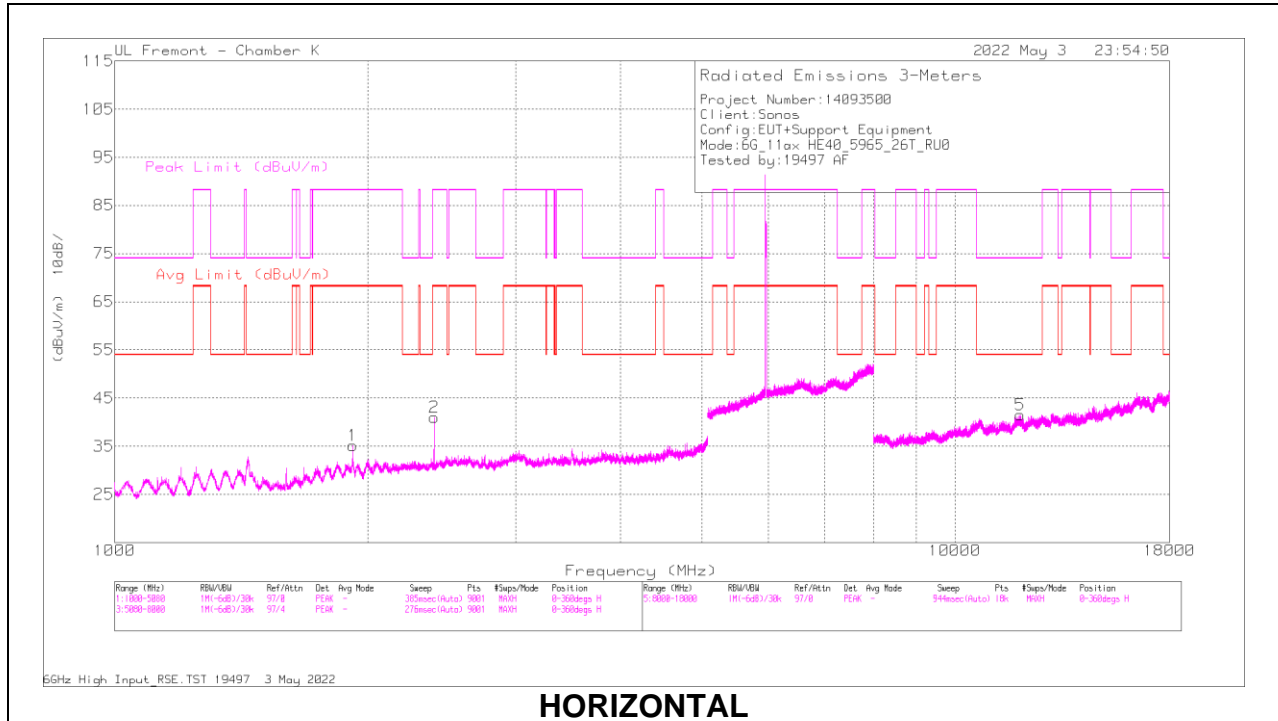

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	2400.016	56.58	PK-U	32	-44.2	0	44.38	-	-	88.2	-43.82	30	100	H
	2400.072	50.34	ADR	32	-44.2	2.01	40.15	68.2	-28.05	-	-	30	100	H
1	1919.305	64.31	PK-U	31	-44.9	0	50.41	-	-	88.2	-37.79	166	154	H
	1920.086	45.69	ADR	31	-45	2.01	33.7	68.2	-34.5	-	-	166	154	H
4	2399.892	55.28	PK-U	32	-44.2	0	43.08	-	-	88.2	-45.12	337	157	V
	2400.027	49.9	ADR	32	-44.2	2.01	39.71	68.2	-28.49	-	-	337	157	V
3	1921.115	59.67	PK-U	31	-45.1	0	45.57	-	-	88.2	-42.63	316	102	V
	1919.979	42.75	ADR	31	-45	2.01	30.76	68.2	-37.44	-	-	316	102	V
5	* 11953.983	44.33	PK-U	38.7	-33.3	0	49.73	-	-	74	-24.27	233	99	H
	* 11952.888	33.1	ADR	38.7	-33.3	2.01	40.51	54	-13.49	-	-	233	99	H
6	* 11999.86	44.28	PK-U	38.8	-33	0	50.08	-	-	74	-23.92	239	102	V
	* 12000.108	32.54	ADR	38.8	-33	2.01	40.35	54	-13.65	-	-	239	102	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 8

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL

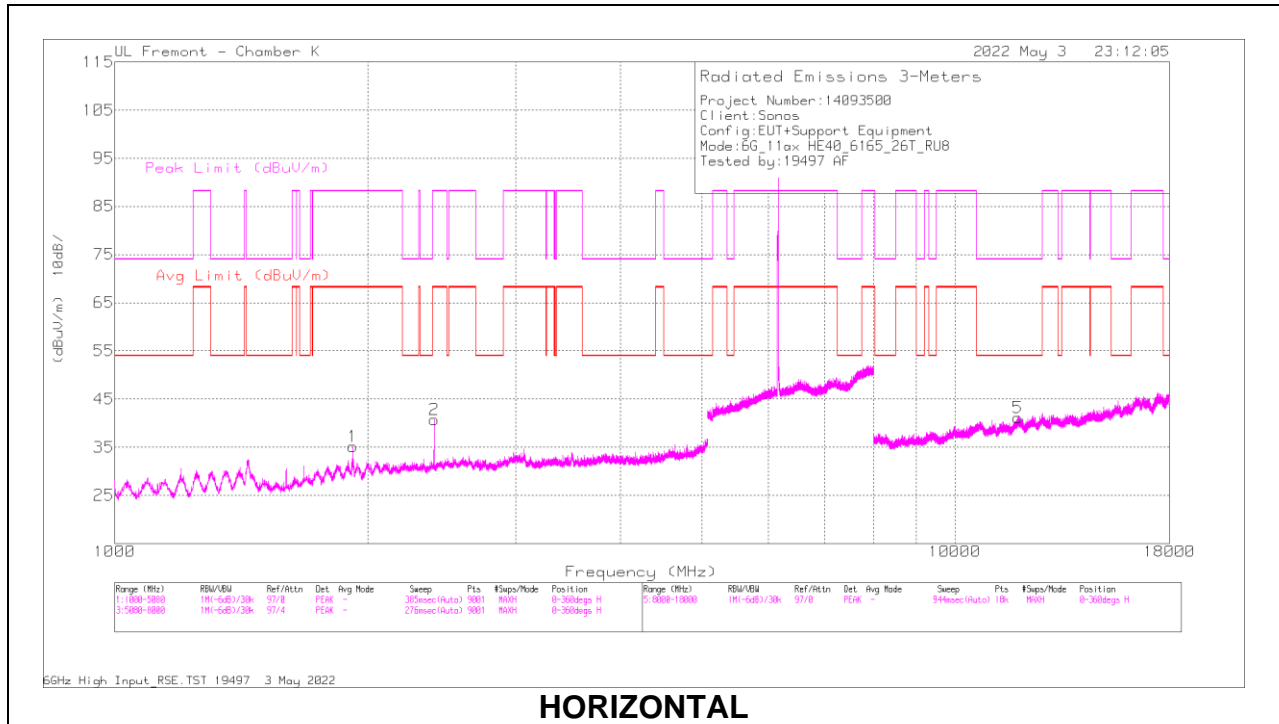

HORIZONTAL

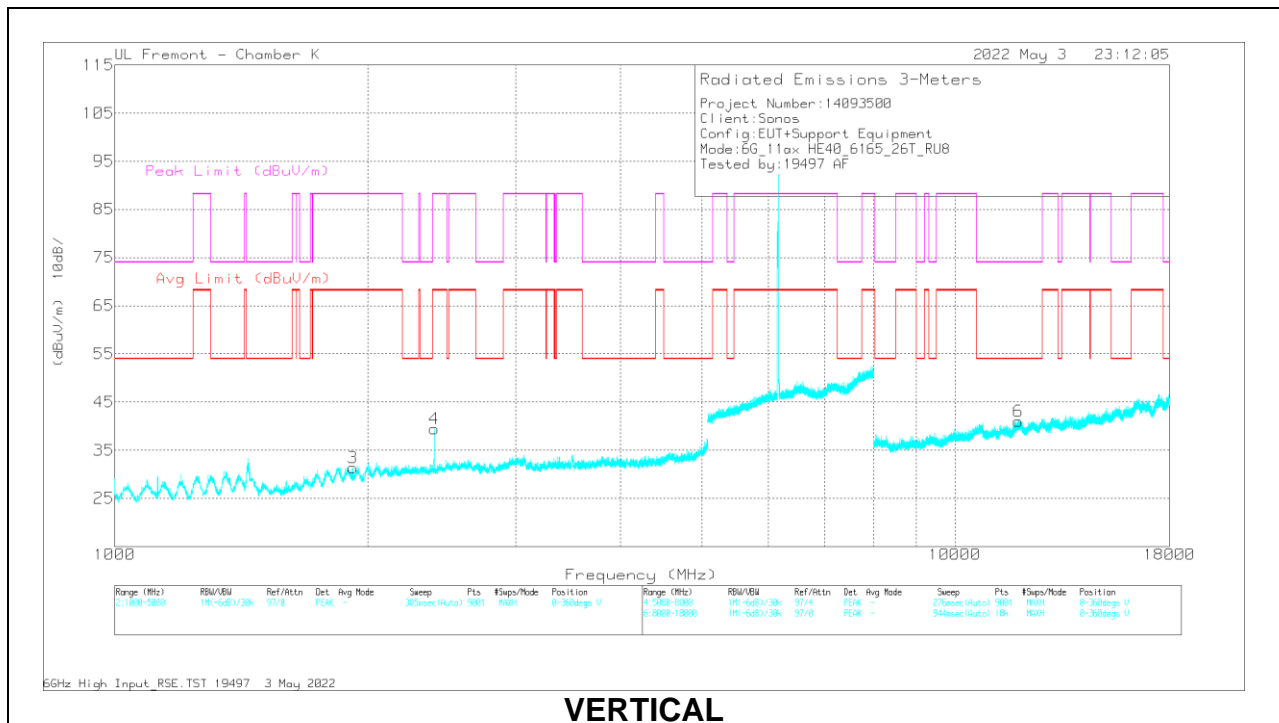

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	2400.228	59.62	PK-U	32	-44.2	0	47.42	-	-	88.2	-40.78	33	174	H
	2400.018	49.94	ADR	32	-44.2	2.01	39.75	68.2	-28.45	-	-	33	174	H
1	1920.656	61.29	PK-U	31	-45.1	0	47.19	-	-	88.2	-41.01	171	313	H
	1919.95	45.61	ADR	31	-45	2.01	33.62	68.2	-34.58	-	-	171	313	H
4	2400.112	57.7	PK-U	32	-44.2	0	45.5	-	-	88.2	-42.7	17	167	V
	2399.98	49.85	ADR	32	-44.2	2.01	39.66	68.2	-28.54	-	-	17	167	V
3	1919.293	59.37	PK-U	31	-44.9	0	45.47	-	-	88.2	-42.73	27	103	V
	1920.184	42.78	ADR	31	-45	2.01	30.79	68.2	-37.41	-	-	27	103	V
5	* 11879.583	44.89	PK-U	38.7	-33.9	0	49.69	-	-	74	-24.31	158	160	H
	* 11879.291	33.59	ADR	38.7	-33.9	2.01	40.4	54	-13.6	-	-	158	160	H
6	* 11904.601	45.23	PK-U	38.7	-33.7	0	50.23	-	-	74	-23.77	200	239	V
	* 11903.103	33.66	ADR	38.7	-33.7	2.01	40.67	54	-13.33	-	-	200	239	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 17

HARMONICS AND SPURIOUS EMISSIONS

HIGH CHANNEL

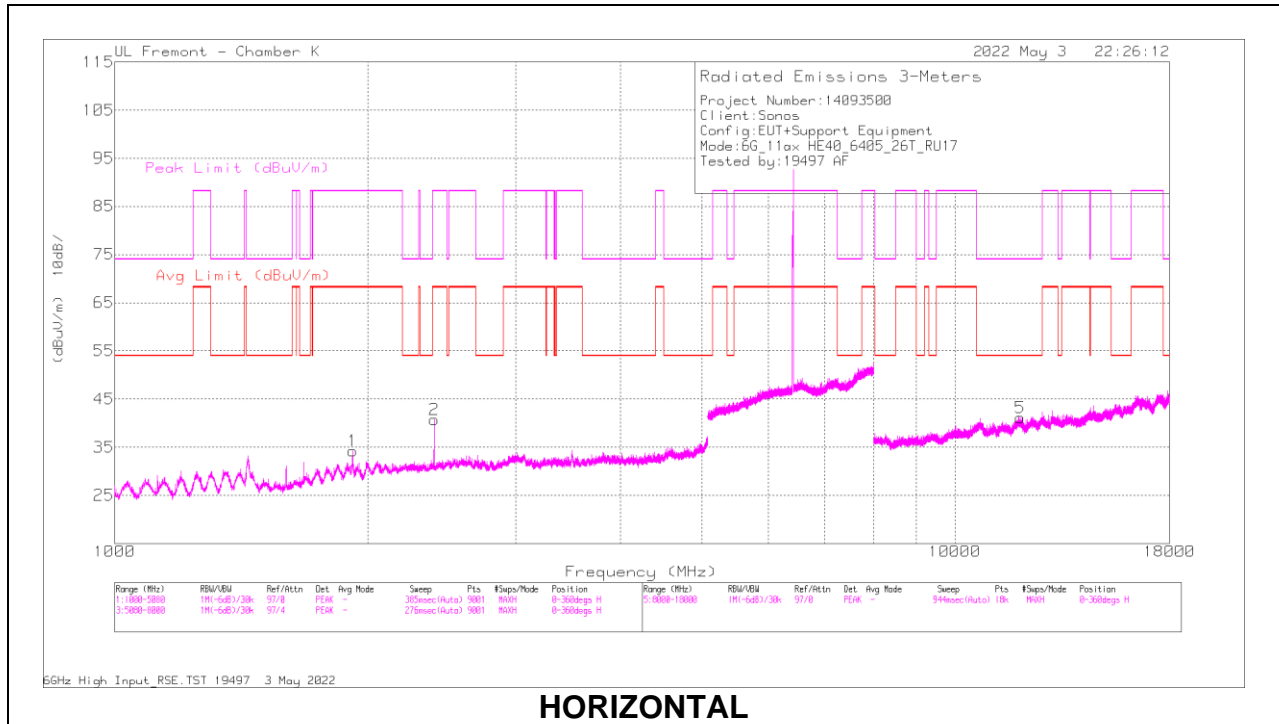

HORIZONTAL

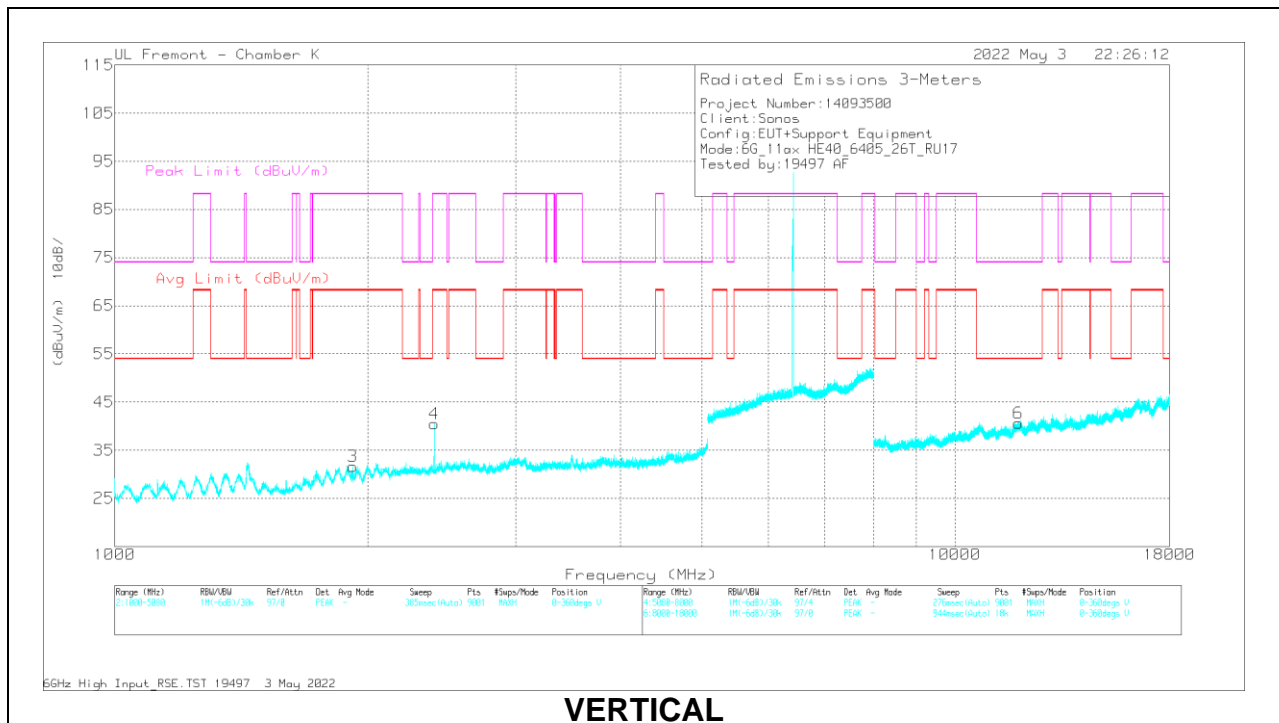

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	2400.3	58.55	PK-U	32	-44.2	0	46.35	-	-	88.2	-41.85	284	361	H
	2400.054	50.08	ADR	32	-44.2	2.01	39.89	68.2	-28.31	-	-	284	361	H
1	1920.208	68.28	PK-U	31	-45	0	54.28	-	-	88.2	-33.92	170	215	H
	1920.03	45.56	ADR	31	-45	2.01	33.57	68.2	-34.63	-	-	170	215	H
4	2399.8	58.34	PK-U	32	-44.2	0	46.14	-	-	88.2	-42.06	331	105	V
	2400.02	50.05	ADR	32	-44.2	2.01	39.86	68.2	-28.34	-	-	331	105	V
3	1920.422	60.16	PK-U	31	-45	0	46.16	-	-	88.2	-42.04	156	350	V
	1920.037	42.77	ADR	31	-45	2.01	30.78	68.2	-37.42	-	-	156	350	V
5	* 11954.531	44.35	PK-U	38.7	-33.3	0	49.75	-	-	74	-24.25	53	129	H
	* 11955.014	32.87	ADR	38.7	-33.3	2.01	40.28	54	-13.72	-	-	53	129	H
6	* 11900.133	45.21	PK-U	38.7	-33.6	0	50.31	-	-	74	-23.69	23	286	V
	* 11900.892	33.47	ADR	38.7	-33.7	2.01	40.48	54	-13.52	-	-	23	286	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 1 + Antenna 4 OFDMA MODE: 484-Tones, RU Index 65

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

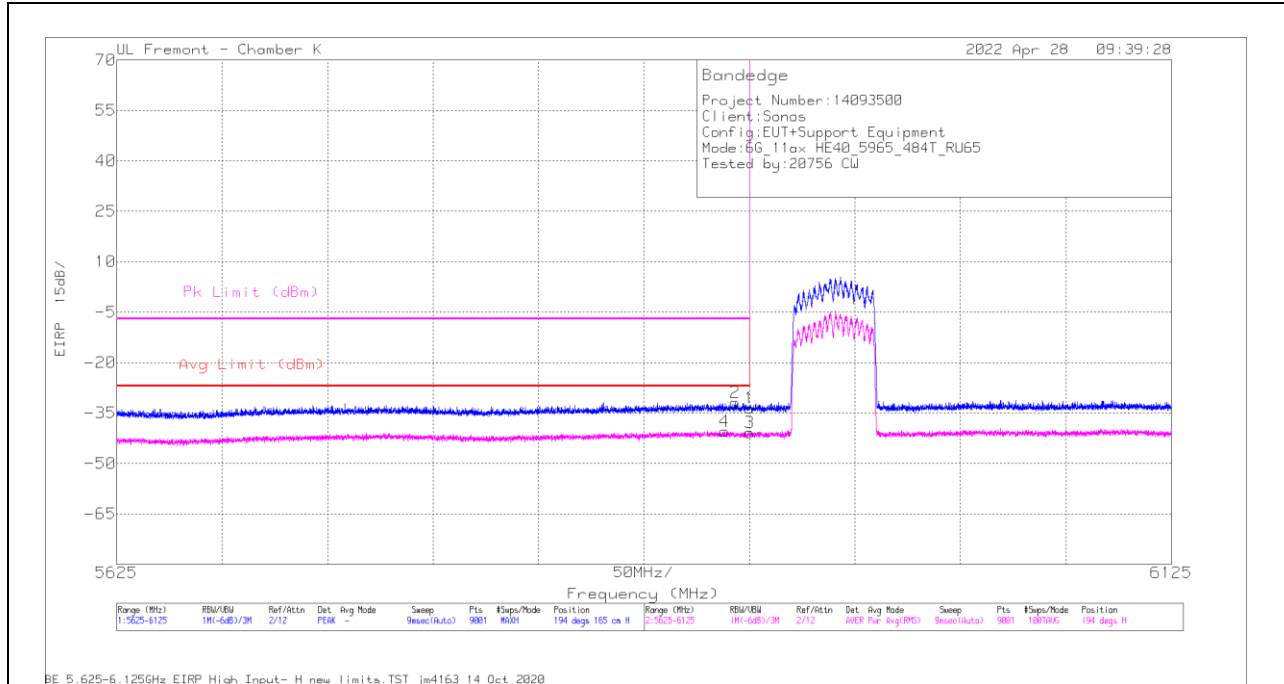


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF 80404 (dB/m)	Amp/Cb/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Pk Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5925	-74.79	Pk	35.3	-5.8	11.8	0	-33.49	-	-	-7	-26.49	194	165	H
2	5918.113	-73.22	Pk	35.3	-5.8	11.8	0	-31.92	-	-	-7	-24.92	194	165	H
3	5925	-85.15	RMS	35.3	-5.8	11.8	2.96	-40.89	-27	-13.89	-	-	194	165	H
4	5913.169	-84.69	RMS	35.2	-5.7	11.8	2.96	-40.43	-27	-13.43	-	-	194	165	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

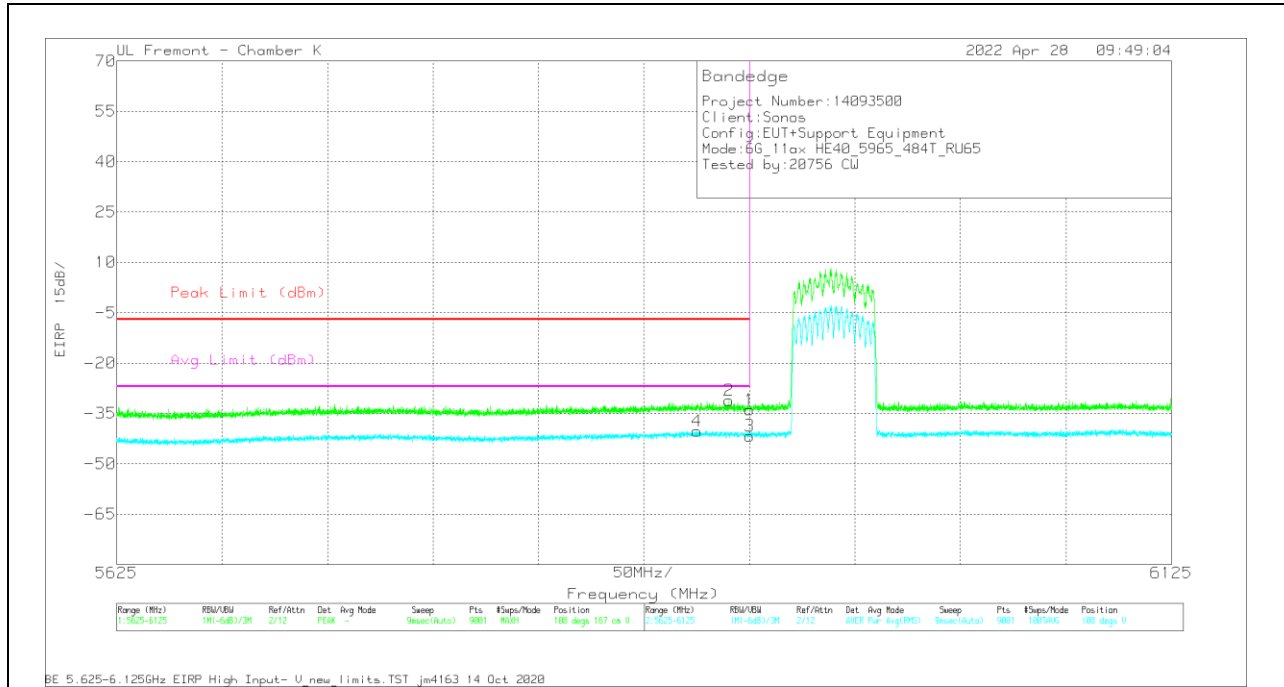


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF 80404 (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5925	-75.28	Pk	35.3	-5.8	11.8	0	-33.98	-7	-26.98	-	-	108	167	V
2	5915.225	-72.4	Pk	35.3	-5.8	11.8	0	-31.1	-7	-24.1	-	-	108	167	V
3	5925	-85.91	RMS	35.3	-5.8	11.8	2.96	-41.65	-	-	-27	-14.65	108	167	V
4	5900.224	-84.48	RMS	35.2	-5.7	11.8	2.96	-40.22	-	-	-27	-13.22	108	167	V


Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

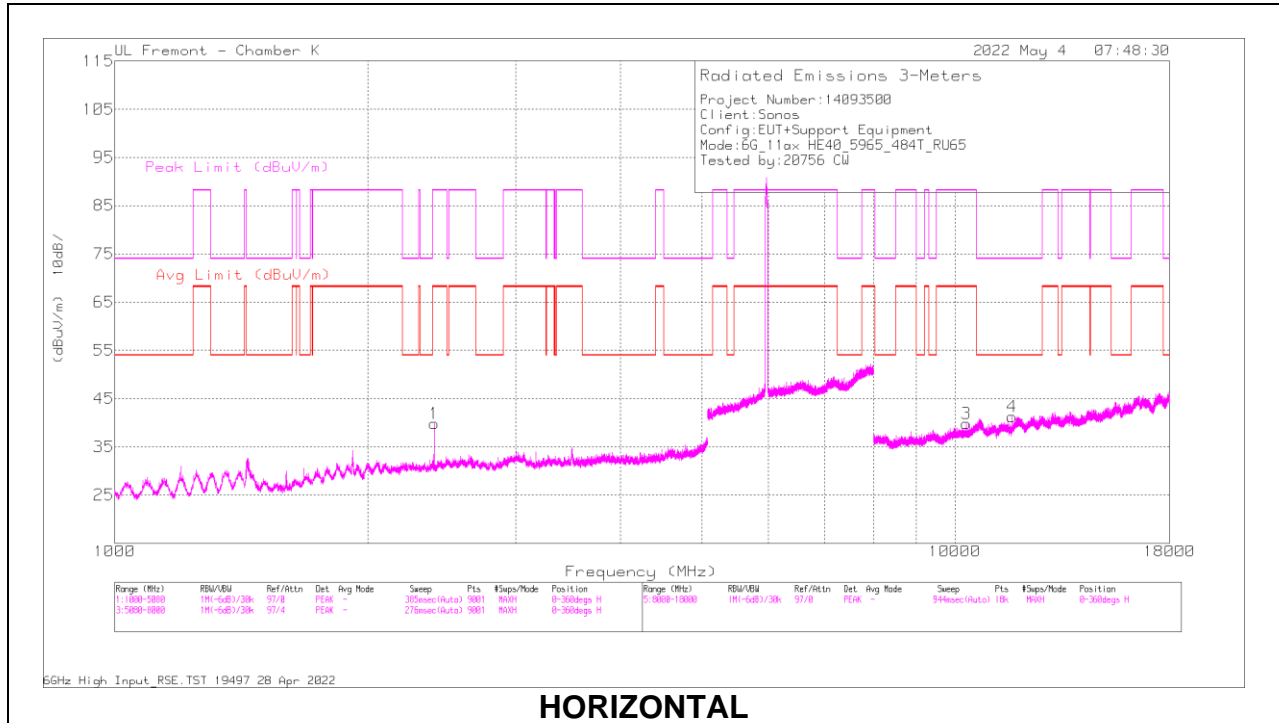

HORIZONTAL

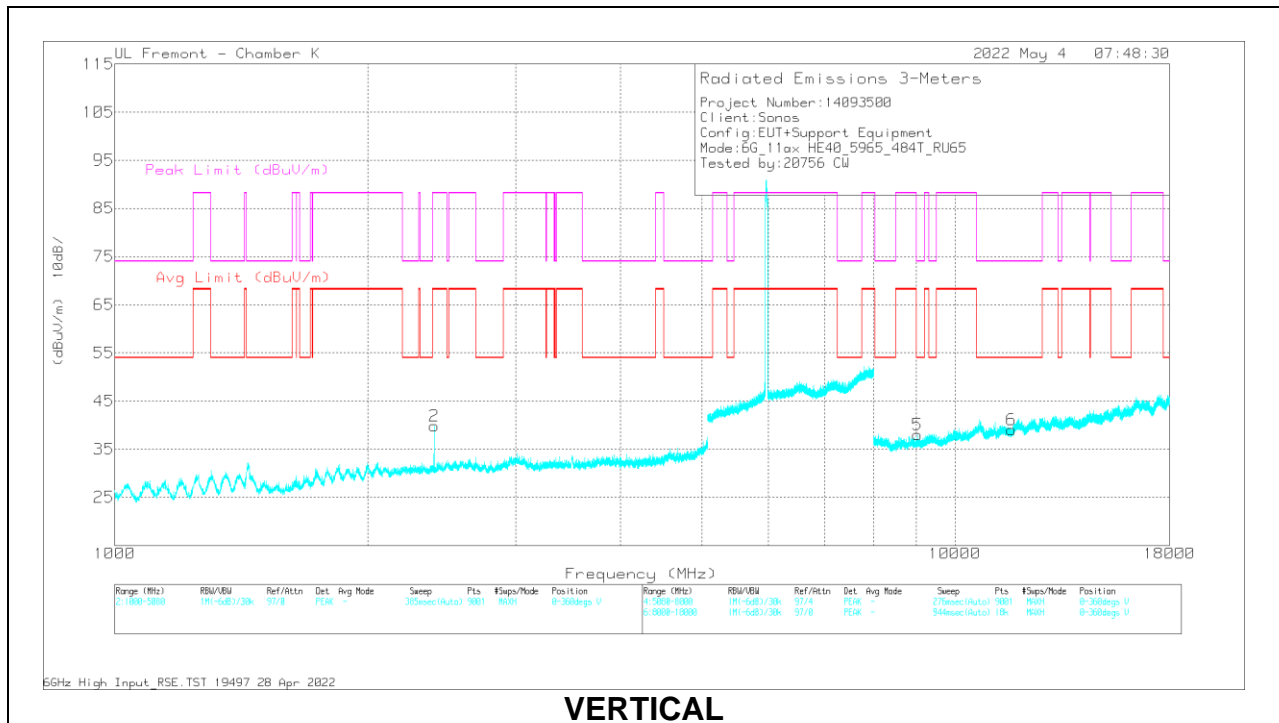

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.28	61.54	PK-U	32	-44.2	0	49.34	-	-	88.2	-38.86	169	256	H
	2400	53.72	ADR	32	-44.2	2.96	44.48	68.2	-23.72	-	-	169	256	H
2	2400.028	63.11	PK-U	32	-44.2	0	50.91	-	-	88.2	-37.29	189	205	V
	2400.02	51.68	ADR	32	-44.2	2.96	42.44	68.2	-25.76	-	-	189	205	V
3	10314.165	45.28	PK-U	37.6	-35.5	0	47.38	-	-	88.2	-40.82	273	125	H
	10315.304	34.11	ADR	37.6	-35.5	2.96	39.17	68.2	-29.03	-	-	273	125	H
4	* 11693.226	44.59	PK-U	38.6	-34.1	0	49.09	-	-	74	-24.91	69	259	H
	* 11693.029	32.82	ADR	38.6	-34.1	2.96	40.28	54	-13.72	-	-	69	259	H
5	* 9019.976	46.21	PK-U	36.3	-35.7	0	46.81	-	-	74	-27.19	15	165	V
	* 9020.028	33.99	ADR	36.3	-35.7	2.96	37.55	54	-16.45	-	-	15	165	V
6	* 11671.589	44.6	PK-U	38.5	-34	0	49.1	-	-	74	-24.9	240	317	V
	* 11671.513	32.76	ADR	38.5	-34	2.96	40.22	54	-13.78	-	-	240	317	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL

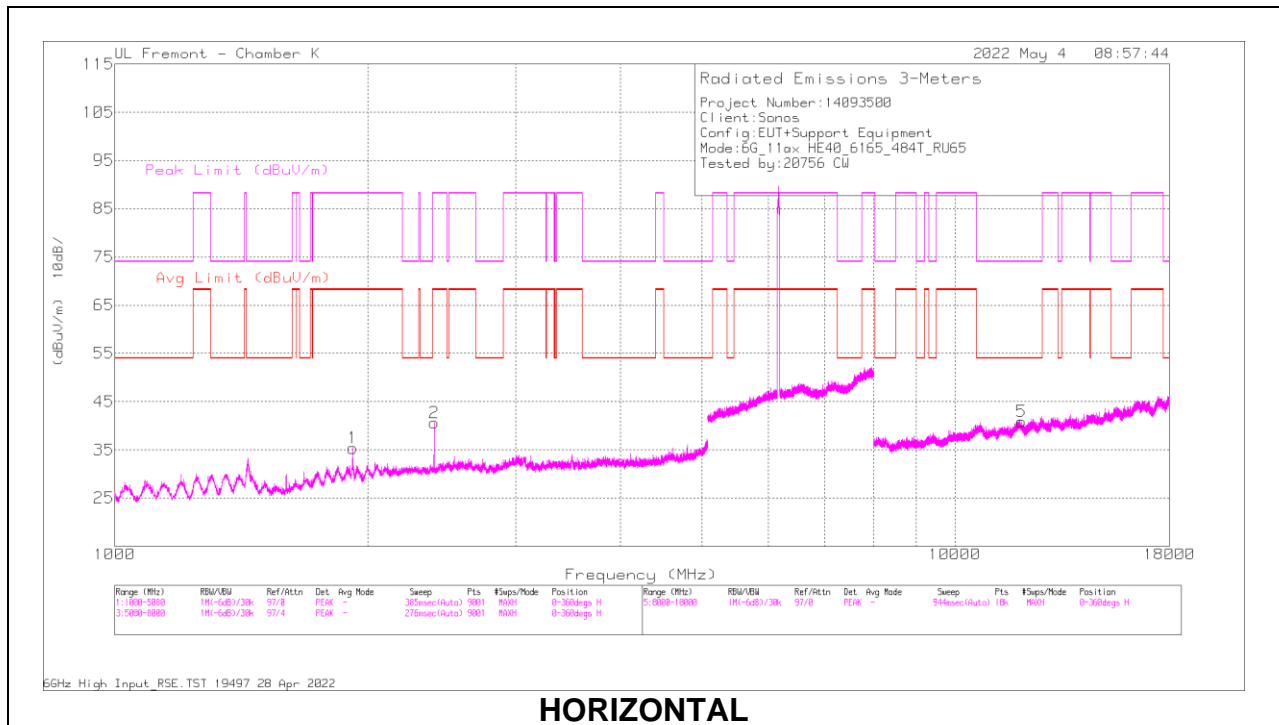

HORIZONTAL

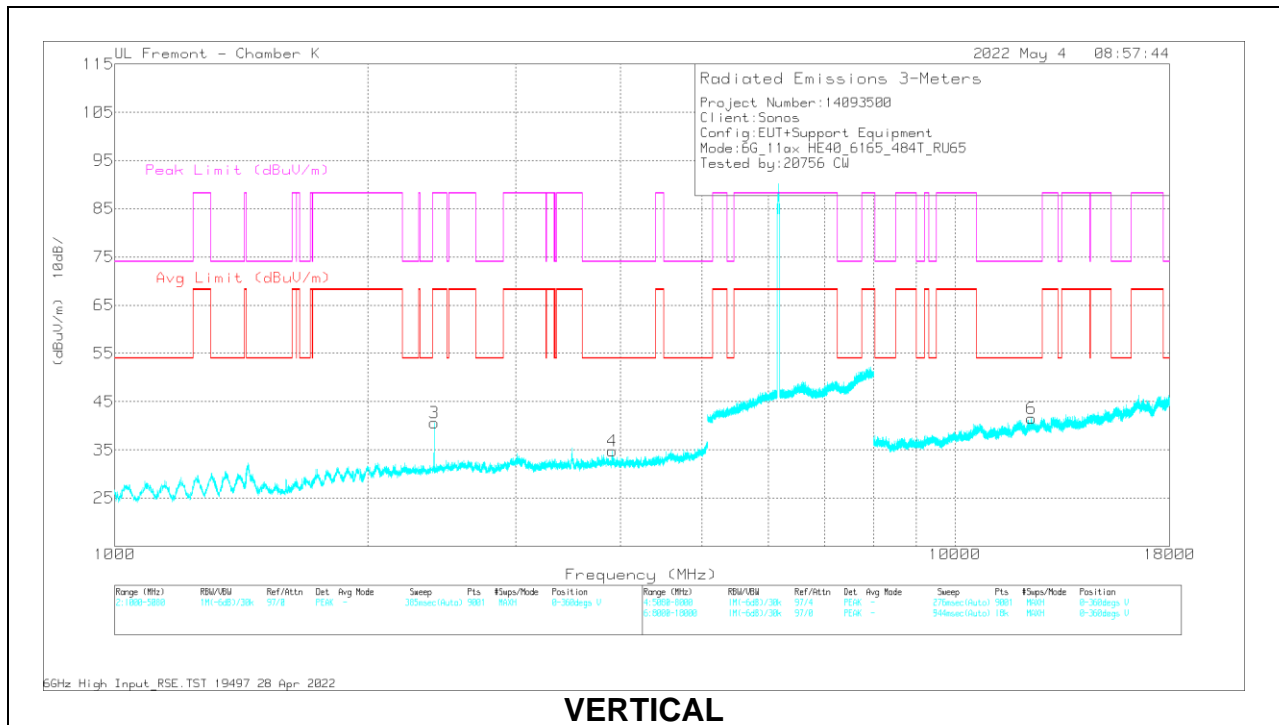

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1920.528	65.22	PK-U	31	-45.1	0	51.12	-	-	88.2	-37.08	216	233	H
	1920.024	49.03	ADR	31	-45	2.96	37.99	68.2	-30.21	-	-	216	233	H
2	2400.255	65.6	PK-U	32	-44.2	0	53.4	-	-	88.2	-34.8	293	354	H
	2400.052	53.79	ADR	32	-44.2	2.96	44.55	68.2	-23.65	-	-	293	354	H
3	2399.948	64.05	PK-U	32	-44.2	0	51.85	-	-	88.2	-36.35	196	169	V
	2400.016	52.42	ADR	32	-44.2	2.96	43.18	68.2	-25.02	-	-	196	169	V
4	* 3907.335	50.62	PK-U	33.7	-41	0	43.32	-	-	74	-30.68	289	136	V
	* 3907.107	38.17	ADR	33.7	-41	2.96	33.83	54	-20.17	-	-	289	136	V
5	* 12004.232	44.18	PK-U	38.8	-32.9	0	50.08	-	-	74	-23.92	55	256	H
	* 12005.335	32.58	ADR	38.8	-32.9	2.96	41.44	54	-12.56	-	-	55	256	H
6	* 12333.551	44.69	PK-U	39.1	-33.4	0	50.39	-	-	74	-23.61	214	322	V
	* 12334.949	33.06	ADR	39.1	-33.4	2.96	41.72	54	-12.28	-	-	214	322	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL

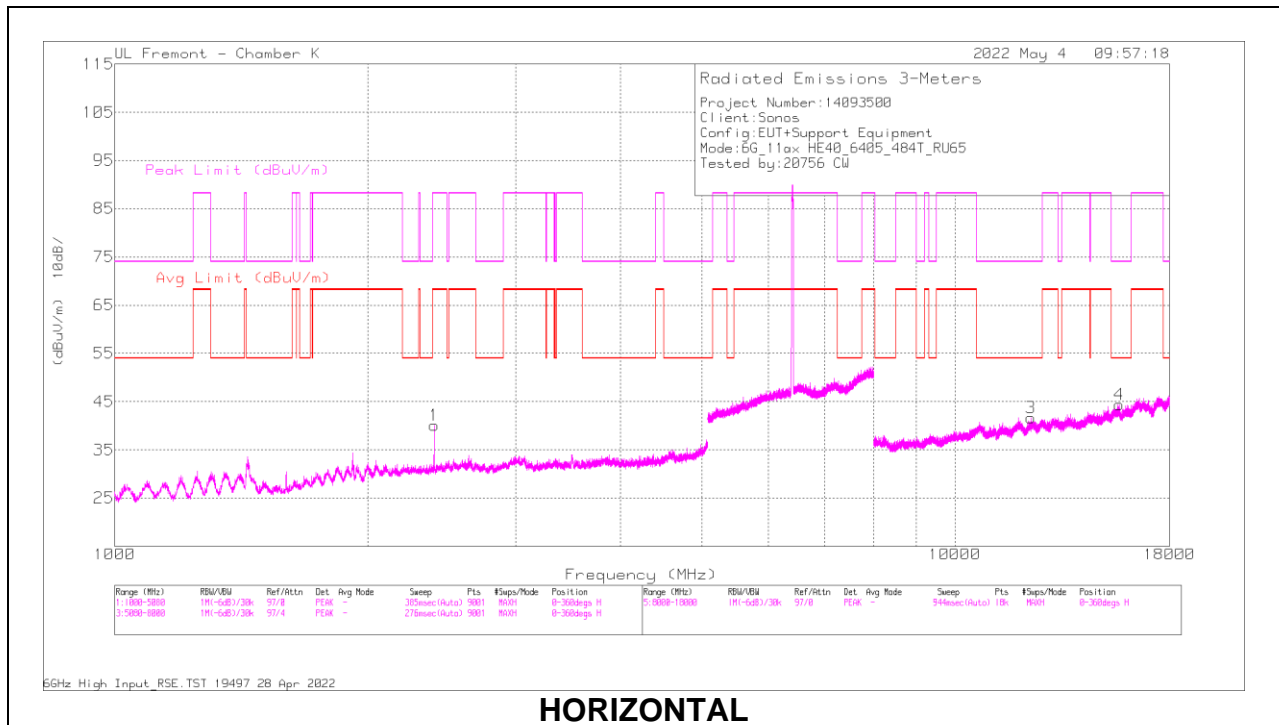

HORIZONTAL

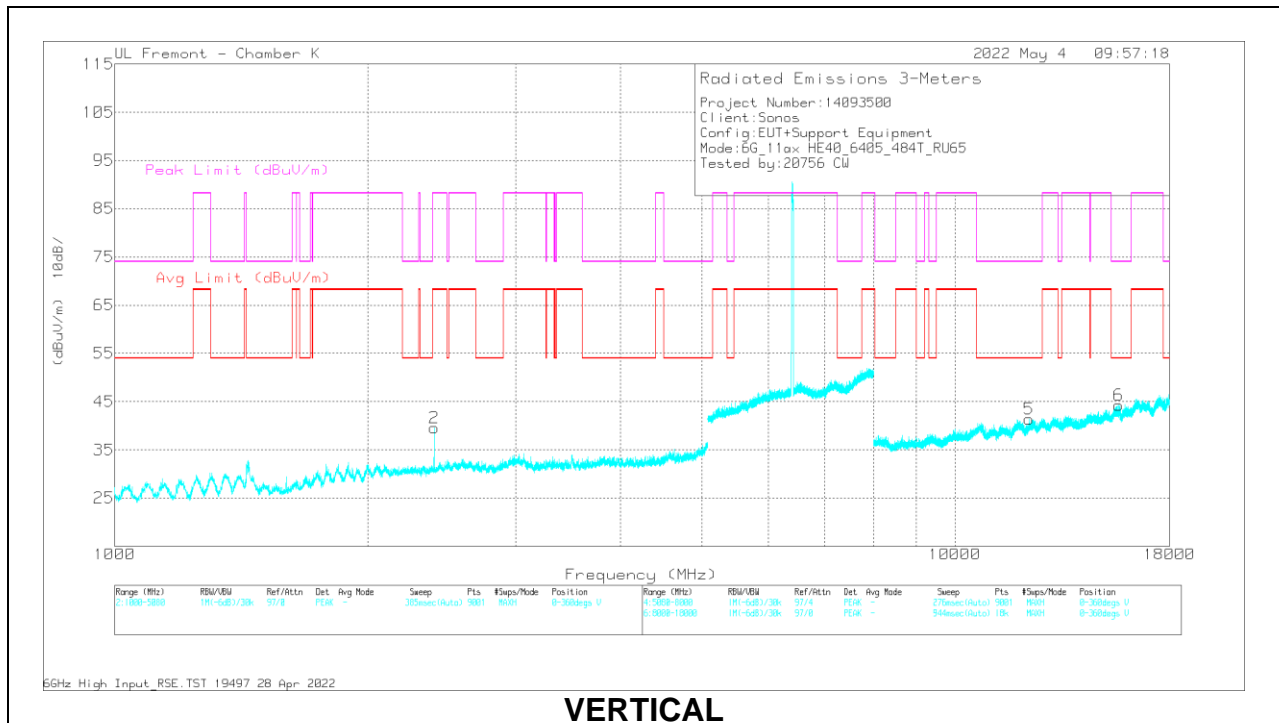

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2399.605	62.14	PK-U	32	-44.2	0	49.94	-	-	88.2	-38.26	291	360	H
	2399.948	53.42	ADR	32	-44.2	2.96	44.18	68.2	-24.02	-	-	291	360	H
2	2400.328	60.36	PK-U	32	-44.2	0	48.16	-	-	88.2	-40.04	195	171	V
	2400.052	52.66	ADR	32	-44.2	2.96	43.42	68.2	-24.78	-	-	195	171	V
3	* 12309.295	44.54	PK-U	39	-33.6	0	49.94	-	-	74	-24.06	174	394	H
	* 12308.016	32.93	ADR	39.1	-33.6	2.96	41.39	54	-12.61	-	-	174	394	H
4	* 15684.116	44.41	PK-U	40.5	-32.2	0	52.71	-	-	74	-21.29	80	126	H
	* 15684.065	32.71	ADR	40.5	-32.2	2.96	43.97	54	-10.03	-	-	80	126	H
5	* 12260.117	44.43	PK-U	39.1	-33.7	0	49.83	-	-	74	-24.17	252	275	V
	* 12259.658	32.65	ADR	39.1	-33.7	2.96	41.01	54	-12.99	-	-	252	275	V
6	* 15651.177	44.72	PK-U	40.6	-32.5	0	52.82	-	-	74	-21.18	9	351	V
	* 15651.203	32.96	ADR	40.6	-32.5	2.96	44.02	54	-9.98	-	-	9	351	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.3. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE UNII-5 BAND

2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 0

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

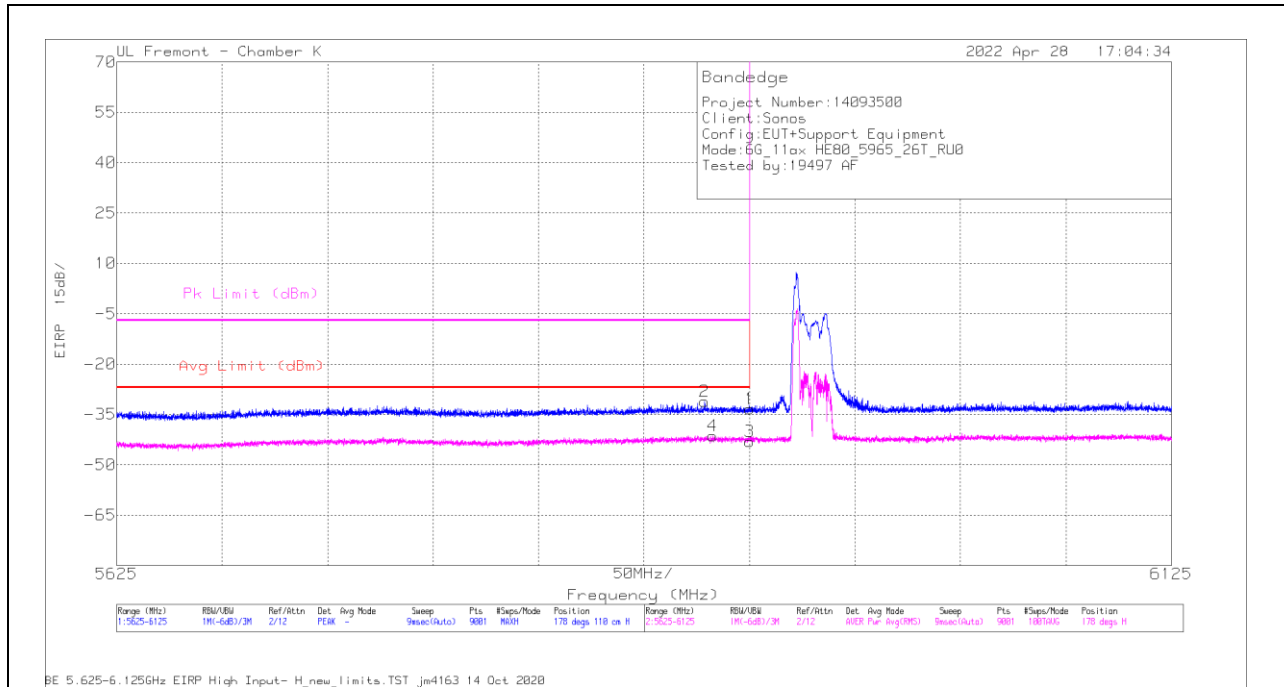


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF 80404 (dB/m)	Amp/Cb/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Pk Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5925	-74.63	Pk	35.3	-5.8	11.8	0	-33.33	-	-	-7	-26.33	178	110	H
2	5903.78	-72.28	Pk	35.2	-5.8	11.8	0	-31.08	-	-	-7	-24.08	178	110	H
3	5925	-86.42	RMS	35.3	-5.8	11.8	2.01	-43.11	-27	-16.11	-	-	178	110	H
4	5907.669	-84.7	RMS	35.3	-5.7	11.8	2.01	-41.29	-27	-14.29	-	-	178	110	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

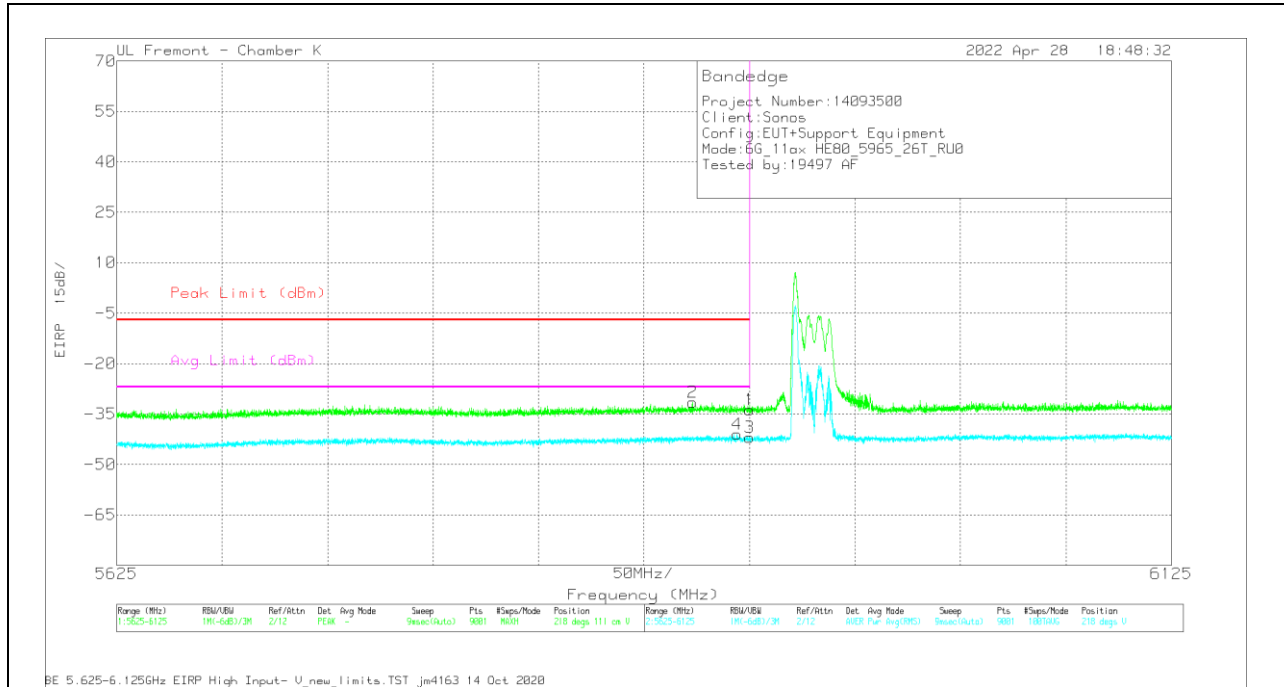


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF 80404 (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5925	-74.99	Pk	35.3	-5.8	11.8	0	-33.69	-7	-26.69	-	-	218	111	V
2	5897.891	-72.66	Pk	35.2	-5.8	11.8	0	-31.46	-7	-24.46	-	-	218	111	V
3	5925	-85.31	RMS	35.3	-5.8	11.8	2.01	-42	-	-	-27	-13.98	218	111	V
4	5919.002	-84.29	RMS	35.2	-5.7	11.8	2.01	-40.98	-	-	-27	-13.98	218	111	V


Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

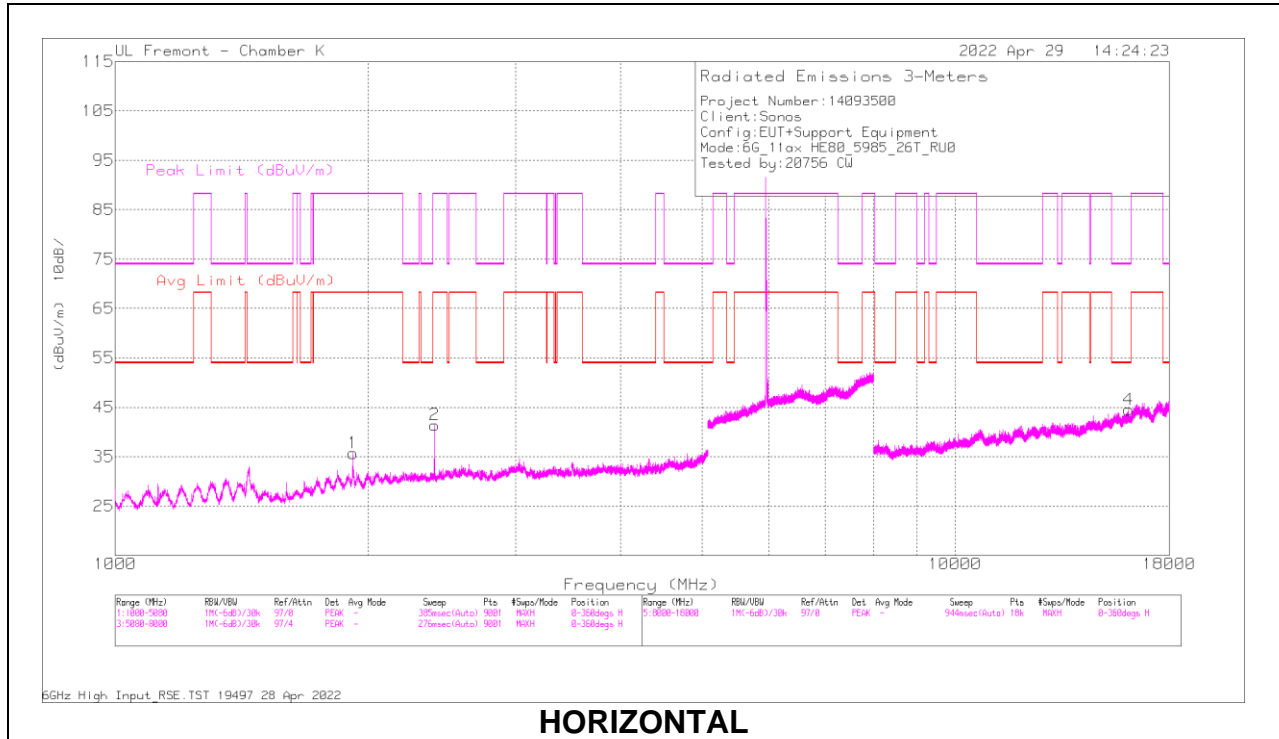

HORIZONTAL

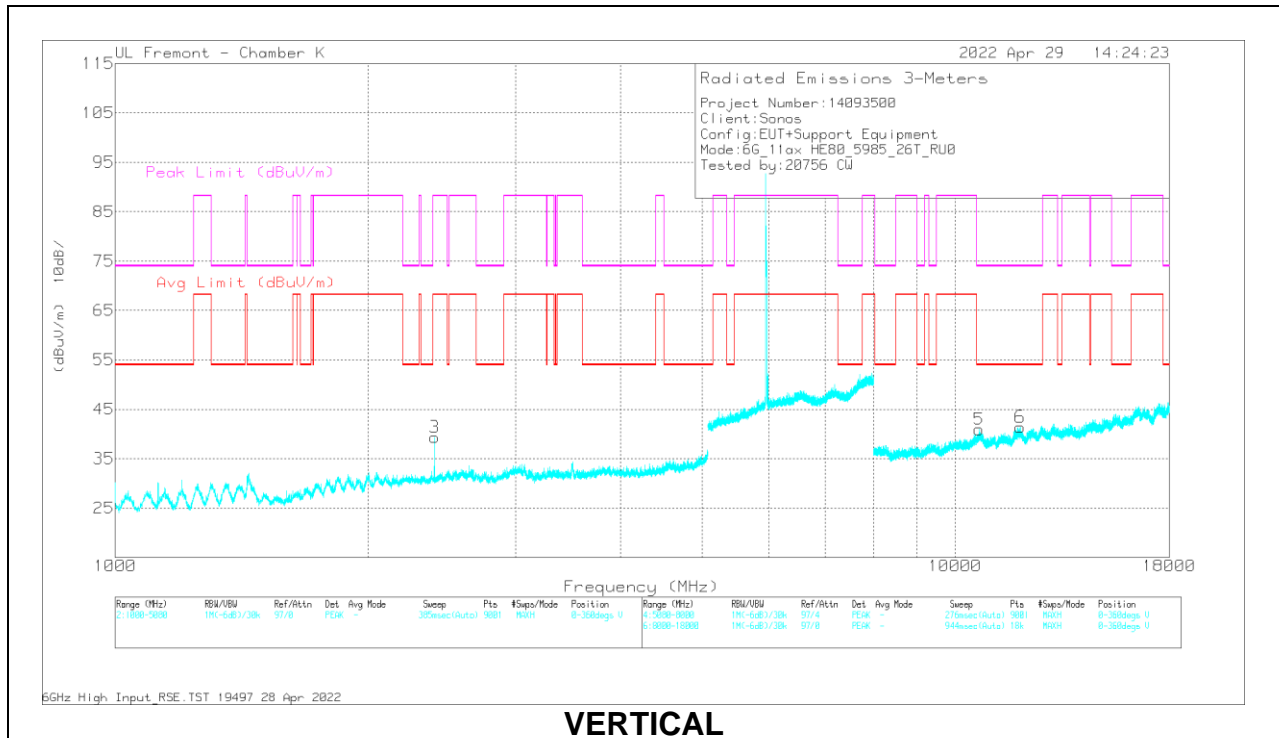

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1918.911	62.99	PK-U	31	-44.9	0	49.09	-	-	88.2	-39.11	197	313	H
	1919.962	47.25	ADR	31	-45	2.01	35.26	68.2	-32.94	-	-	197	313	H
2	2399.919	70.7	PK-U	32	-44.2	0	58.5	-	-	88.2	-29.7	138	227	H
	2399.985	54.07	ADR	32	-44.2	2.01	43.88	68.2	-24.32	-	-	138	227	H
3	2399.9	58.8	PK-U	32	-44.2	0	46.6	-	-	88.2	-41.6	190	141	V
	2400.064	51.68	ADR	32	-44.2	2.01	41.49	68.2	-26.71	-	-	190	141	V
4	* 16101.797	44.49	PK-U	41	-32.2	0	53.29	-	-	74	-20.71	353	383	H
	* 16101.597	32.23	ADR	41	-32.2	2.01	43.04	54	-10.96	-	-	353	383	H
5	* 10688.029	46.9	PK-U	38.2	-35.5	0	49.6	-	-	74	-24.4	254	311	V
	* 10685.288	35.3	ADR	38.2	-35.6	2.01	39.91	54	-14.09	-	-	254	311	V
6	* 11957.574	44.24	PK-U	38.7	-33.3	0	49.64	-	-	74	-24.36	165	192	V
	* 11957.563	32.98	ADR	38.7	-33.3	2.01	40.39	54	-13.61	-	-	165	192	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 18

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL

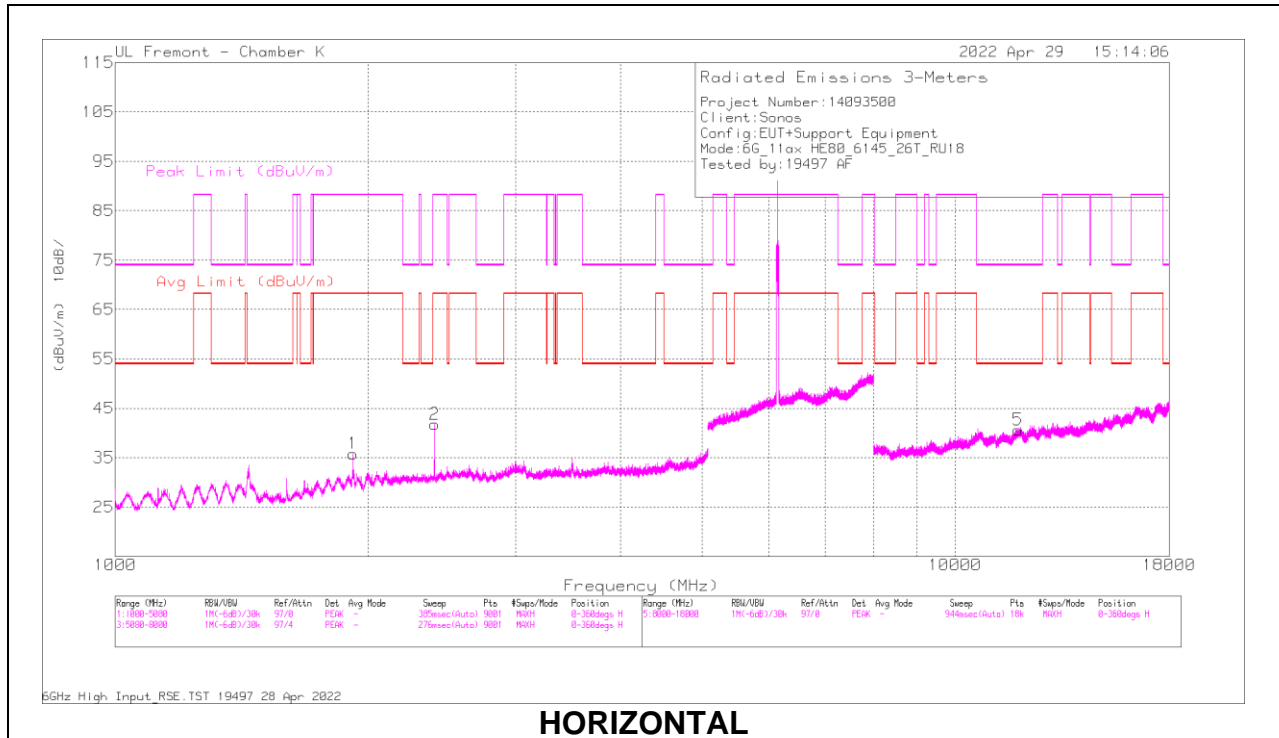

HORIZONTAL

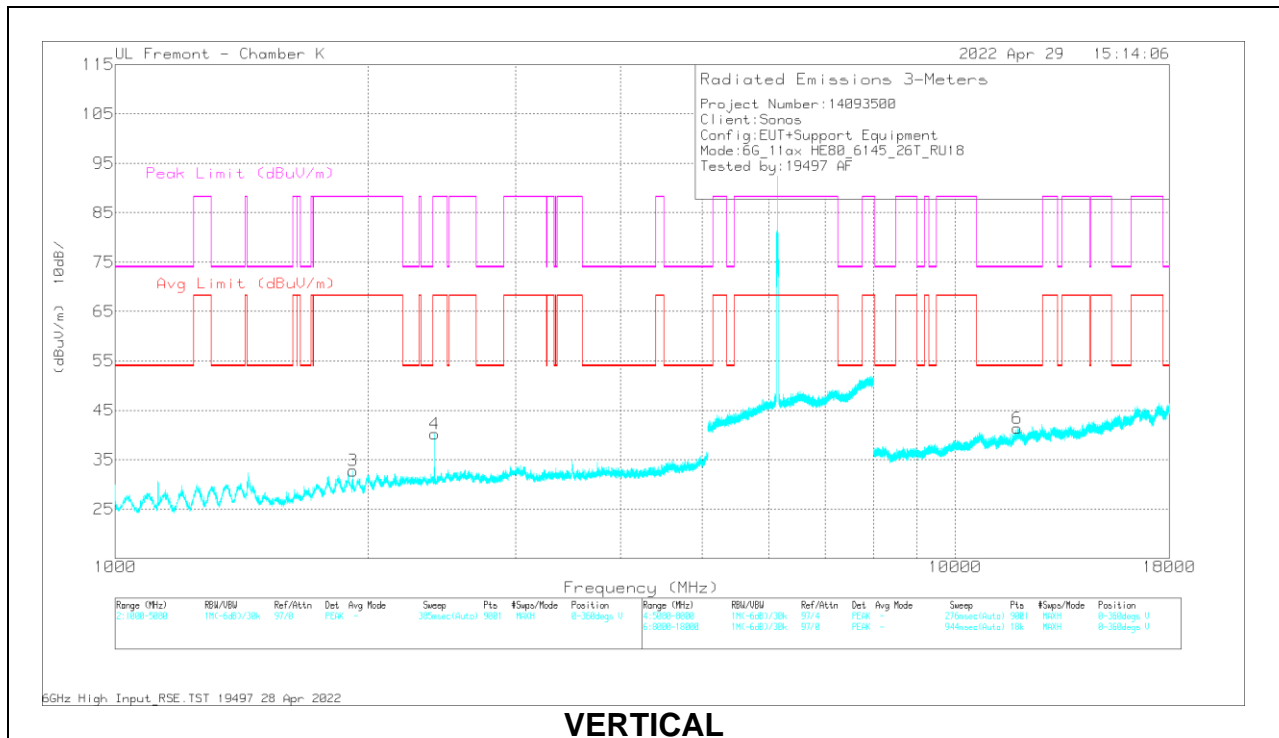

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1920.104	75.82	PK-U	31	-45	0	61.82	-	-	88.2	-26.38	223	202	H
	1920.058	47.17	ADR	31	-45	2.01	35.18	68.2	-33.02	-	-	223	202	H
2	2399.932	55.88	PK-U	32	-44.2	0	43.68	-	-	88.2	-44.52	318	153	H
	2400.077	48.68	ADR	32	-44.2	2.01	38.49	68.2	-29.71	-	-	318	153	H
3	1919.405	64.08	PK-U	31	-44.9	0	50.18	-	-	88.2	-38.02	149	246	V
	1920.102	43.39	ADR	31	-45	2.01	31.4	68.2	-36.8	-	-	149	246	V
4	2399.952	62.74	PK-U	32	-44.2	0	50.54	-	-	88.2	-37.66	5	100	V
	2400.023	50.22	ADR	32	-44.2	2.01	40.03	68.2	-28.17	-	-	5	100	V
5	* 11888.619	45.53	PK-U	38.7	-33.8	0	50.43	-	-	74	-23.57	320	213	H
	* 11891.996	33.65	ADR	38.7	-33.7	2.01	40.66	54	-13.34	-	-	320	213	H
6	* 11868.432	45.27	PK-U	38.7	-33.9	0	50.07	-	-	74	-23.93	61	358	V
	* 11870.267	33.49	ADR	38.7	-34	2.01	40.2	54	-13.8	-	-	61	358	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 36

HARMONICS AND SPURIOUS EMISSIONS

HIGH CHANNEL

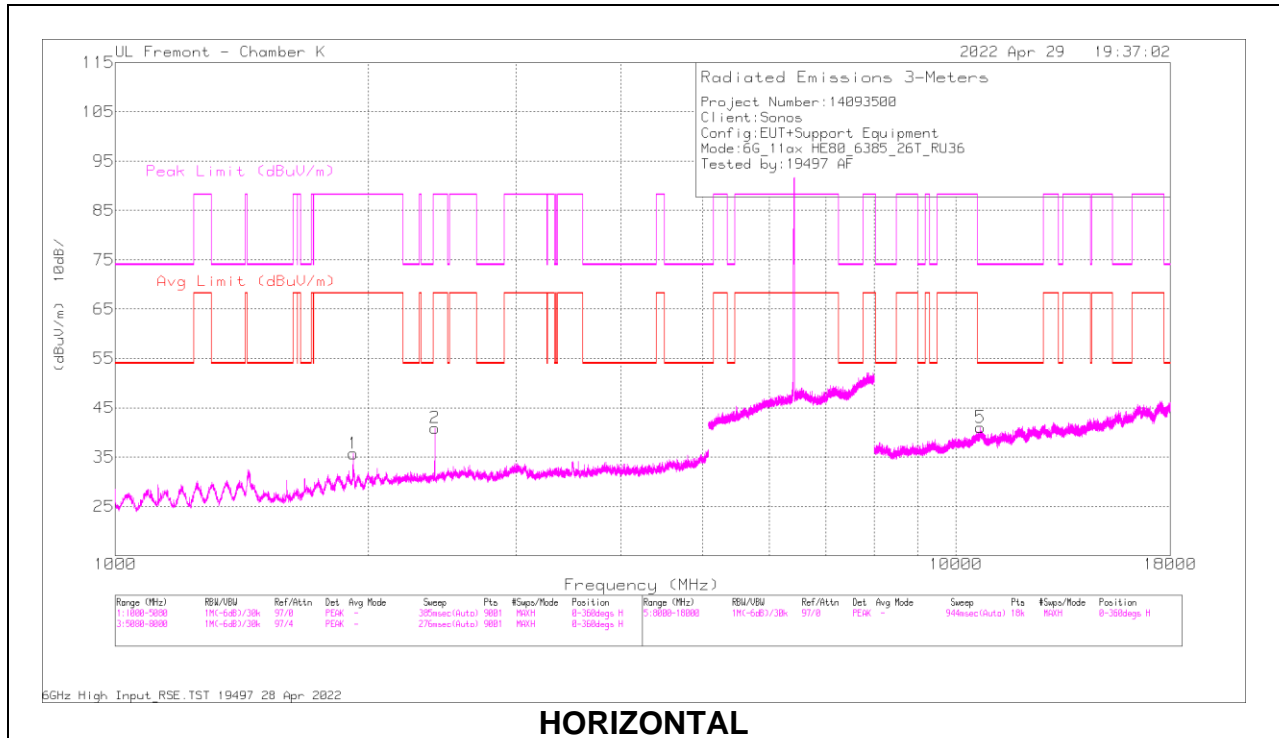

HORIZONTAL

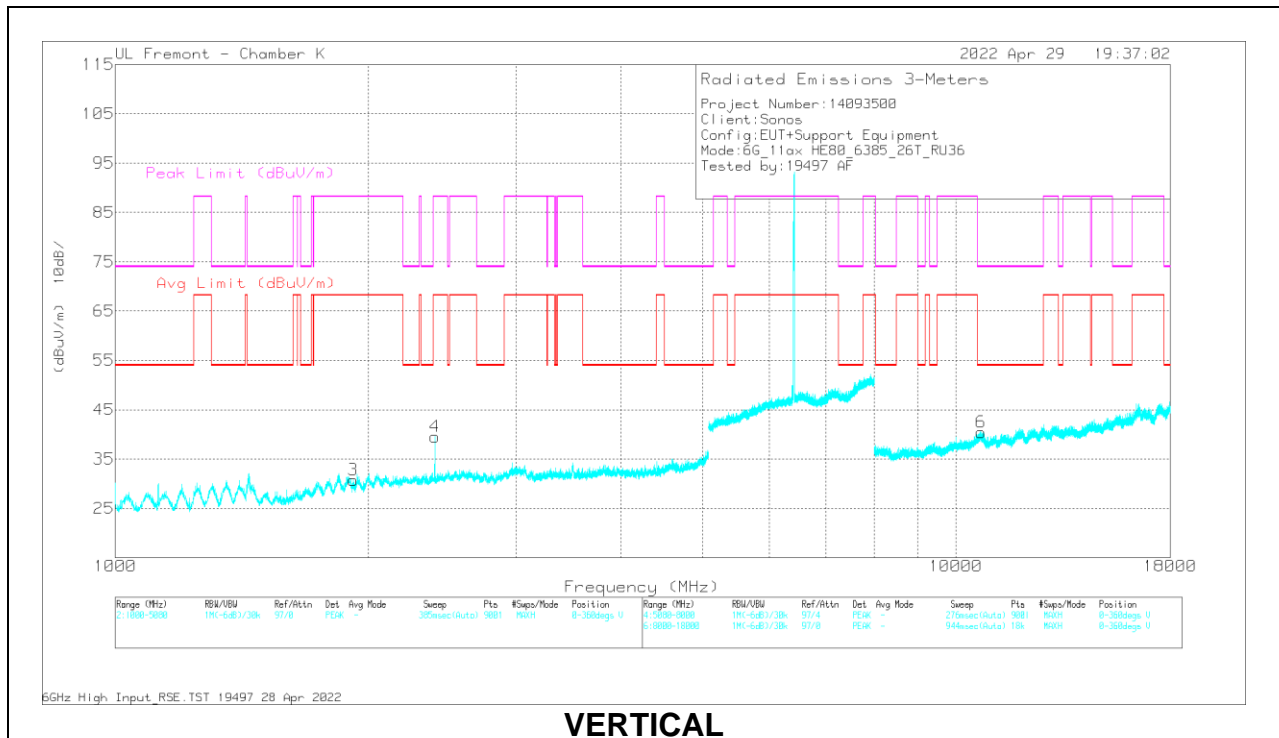

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1919.165	65.26	PK-U	31	-44.9	0	51.36	-	-	88.2	-36.84	207	231	H
	1920.088	47.63	ADR	31	-45	2.01	35.64	68.2	-32.56	-	-	207	231	H
2	2400.048	61.44	PK-U	32	-44.2	0	49.24	-	-	88.2	-38.96	137	203	H
	2399.998	50.08	ADR	32	-44.2	2.01	39.89	68.2	-28.31	-	-	137	203	H
3	1920.9	58.02	PK-U	31	-45.1	0	43.92	-	-	88.2	-44.28	301	139	V
	1920.099	43.48	ADR	31	-45	2.01	31.49	68.2	-36.71	-	-	301	139	V
4	2400.136	58.77	PK-U	32	-44.2	0	46.57	-	-	88.2	-41.63	13	319	V
	2400.022	45.66	ADR	32	-44.2	2.01	35.47	68.2	-32.73	-	-	13	319	V
5	* 10698.797	46.64	PK-U	38.2	-35.3	0	49.54	-	-	74	-24.46	146	290	H
	* 10699	35.26	ADR	38.2	-35.3	2.01	40.17	54	-13.83	-	-	146	290	H
6	* 10724.67	46.33	PK-U	38.2	-35.1	0	49.43	-	-	74	-24.57	304	218	V
	* 10725.641	35.13	ADR	38.2	-35.1	2.01	40.24	54	-13.76	-	-	304	218	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 1 + Antenna 4 OFDMA MODE: 996-Tones, RU Index 67

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

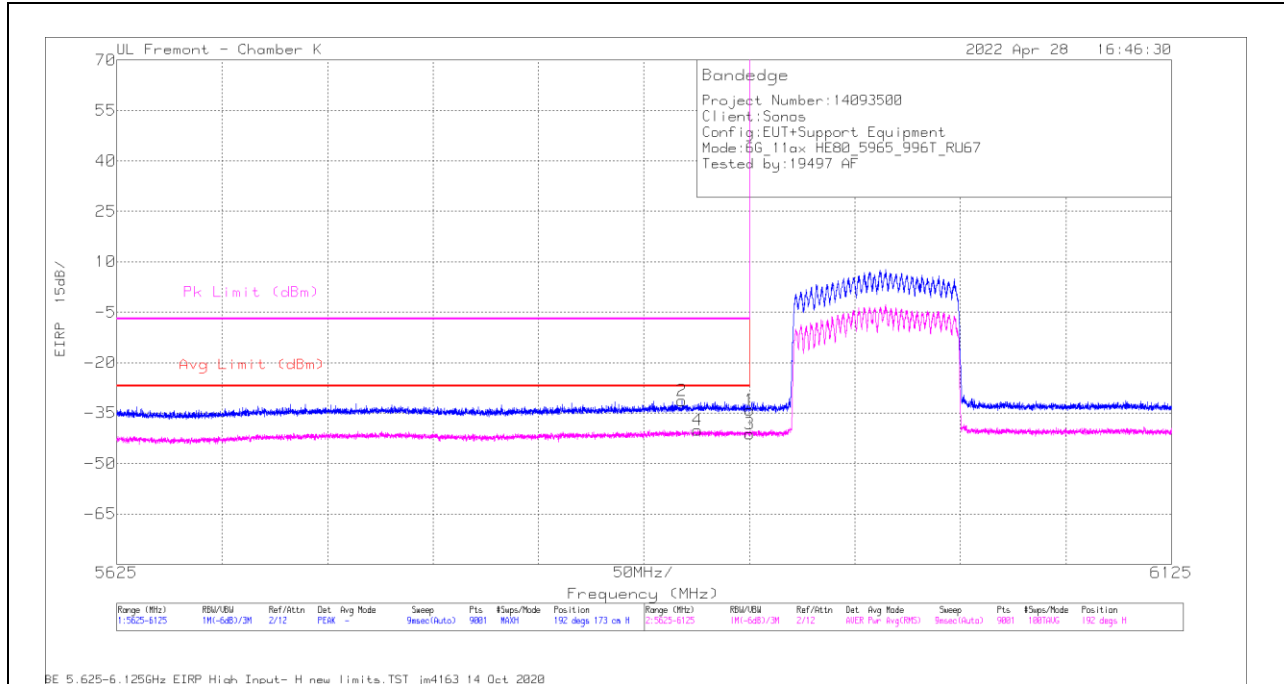


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF 80404 (dB/m)	Amp/Cb/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Pk Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5925	-75.38	Pk	35.3	-5.8	11.8	0	-34.08	-	-	-7	-27.08	192	173	H
2	5893.058	-72.52	Pk	35.2	-5.8	11.8	0	-31.32	-	-	-7	-24.32	192	173	H
3	5925	-85.77	RMS	35.3	-5.8	11.8	3.32	-41.15	-27	-14.15	-	-	192	173	H
4	5900.447	-84.64	RMS	35.2	-5.7	11.8	3.32	-40.02	-27	-13.02	-	-	192	173	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

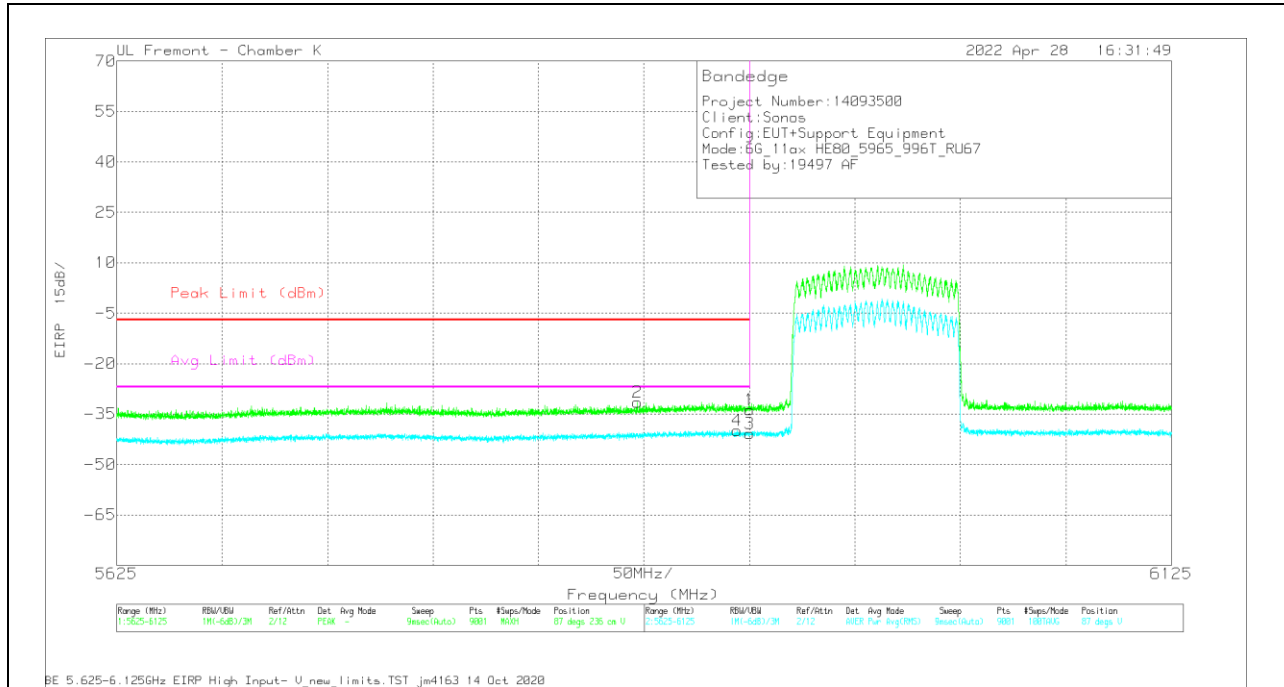


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF 80404 (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5925	-75.08	Pk	35.3	-5.8	11.8	0	-33.78	-7	-26.78	-	-	87	236	V
2	5871.891	-72.36	Pk	35.1	-6	11.8	0	-31.46	-7	-24.46	-	-	87	236	V
3	5925	-85.51	RMS	35.3	-5.8	11.8	3.32	-40.89	-	-	-27	-13.89	87	236	V
4	5919.058	-84.47	RMS	35.2	-5.7	11.8	3.32	-39.85	-	-	-27	-12.85	87	236	V


Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

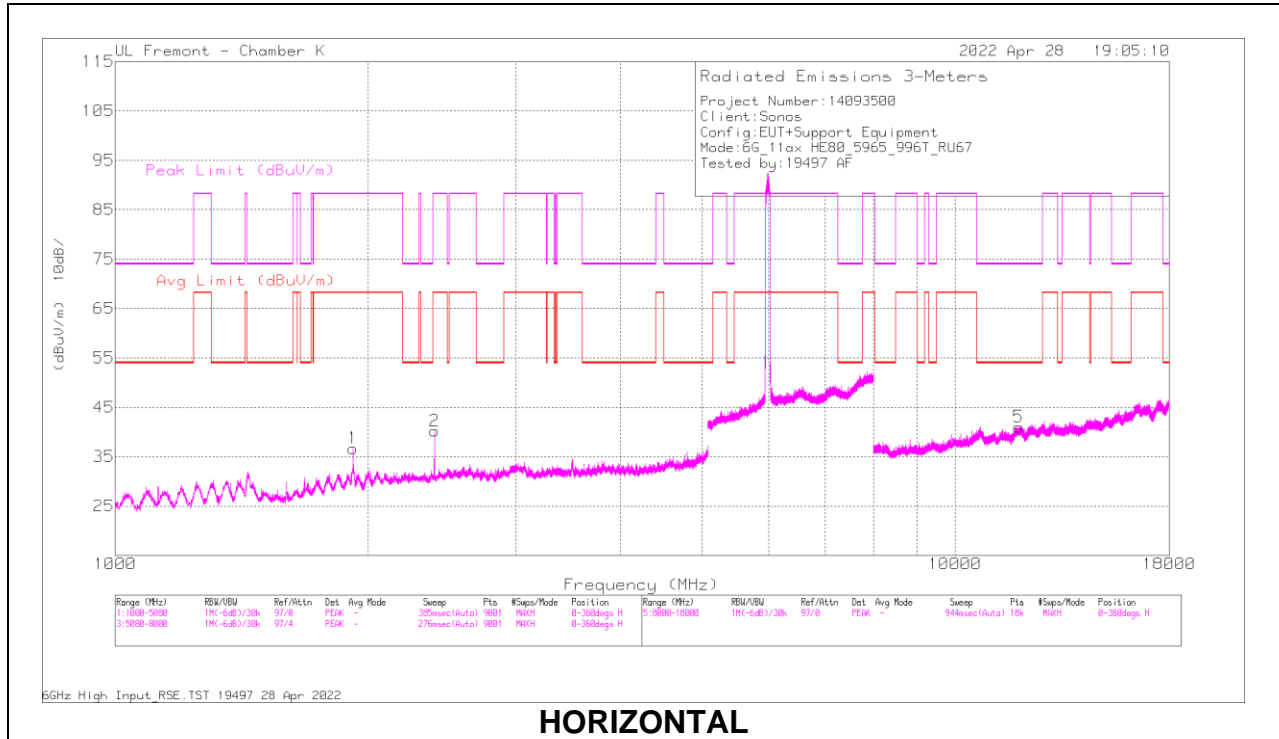

HORIZONTAL

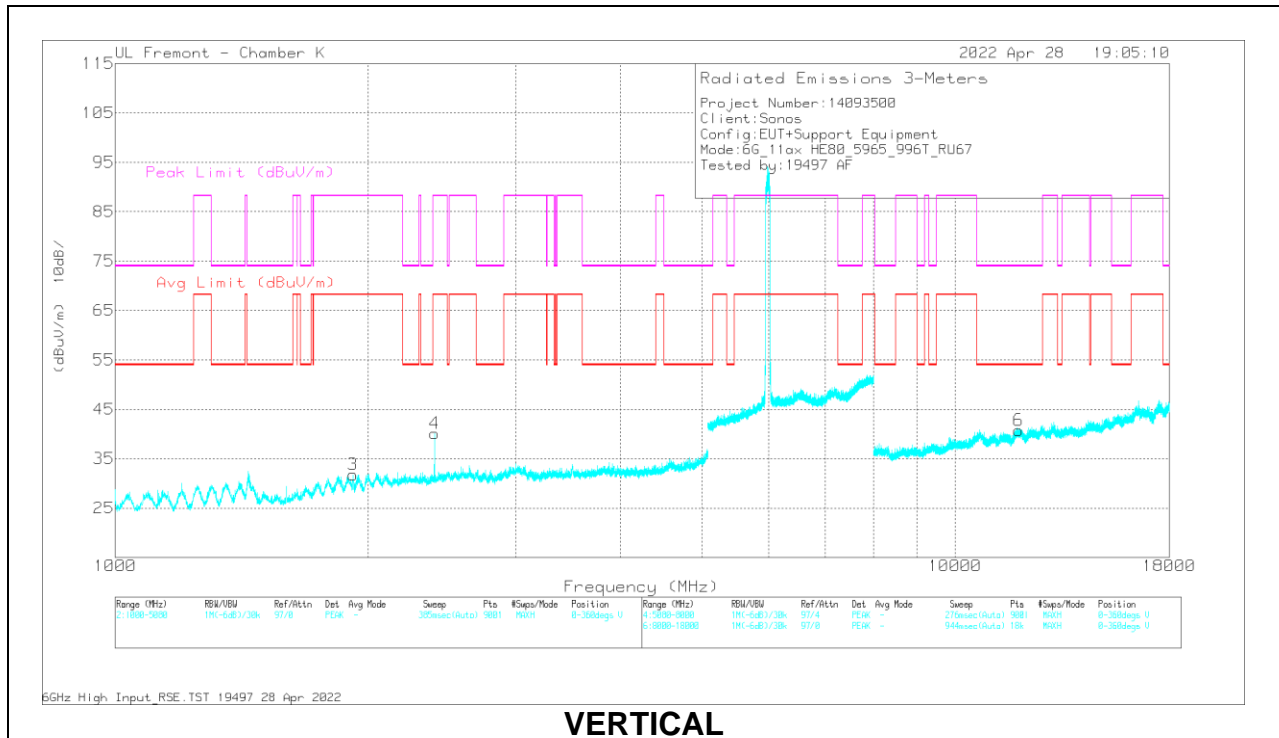

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1920.56	62.73	PK-U	31	-45.1	0	48.63	-	-	88.2	-39.57	303	125	H
	1920.012	45.05	ADR	31	-45	3.32	34.37	68.2	-33.83	-	-	303	125	H
2	2399.94	59.84	PK-U	32	-44.2	0	47.64	-	-	88.2	-40.56	31	224	H
	2400.083	51.04	ADR	32	-44.2	3.32	42.16	68.2	-26.04	-	-	31	224	H
3	1919.333	64.85	PK-U	31	-44.9	0	50.95	-	-	88.2	-37.25	33	109	V
	1920.06	43.37	ADR	31	-45	3.32	32.69	68.2	-35.51	-	-	33	109	V
4	2400.112	59.07	PK-U	32	-44.2	0	46.87	-	-	88.2	-41.33	203	184	V
	2400.017	50.78	ADR	32	-44.2	3.32	41.9	68.2	-26.3	-	-	203	104	V
5	* 11912.611	45	PK-U	38.7	-33.7	0	50	-	-	74	-24	57	361	H
	* 11913.058	33.27	ADR	38.7	-33.7	3.32	41.59	54	-12.41	-	-	57	361	H
6	* 11908.926	45.33	PK-U	38.7	-33.7	0	50.33	-	-	74	-23.67	170	395	V
	* 11910.236	33.3	ADR	38.7	-33.7	3.32	41.62	54	-12.38	-	-	170	395	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL

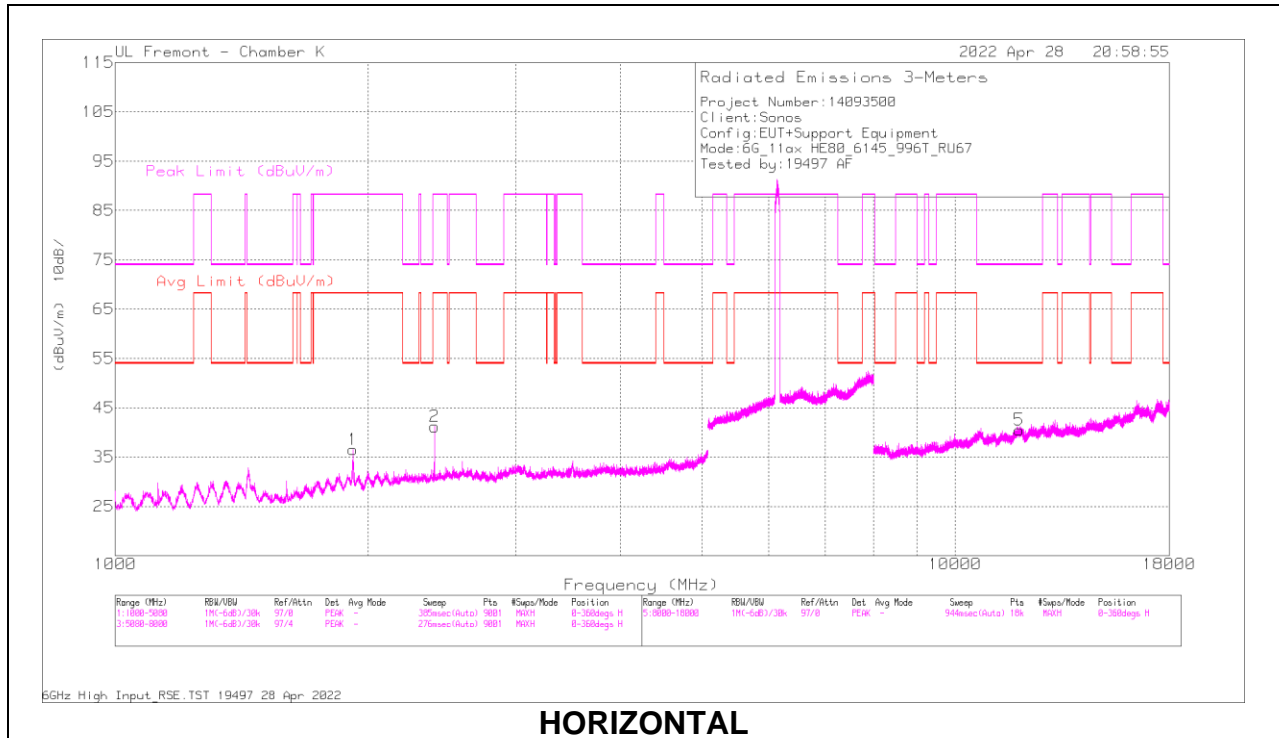

HORIZONTAL

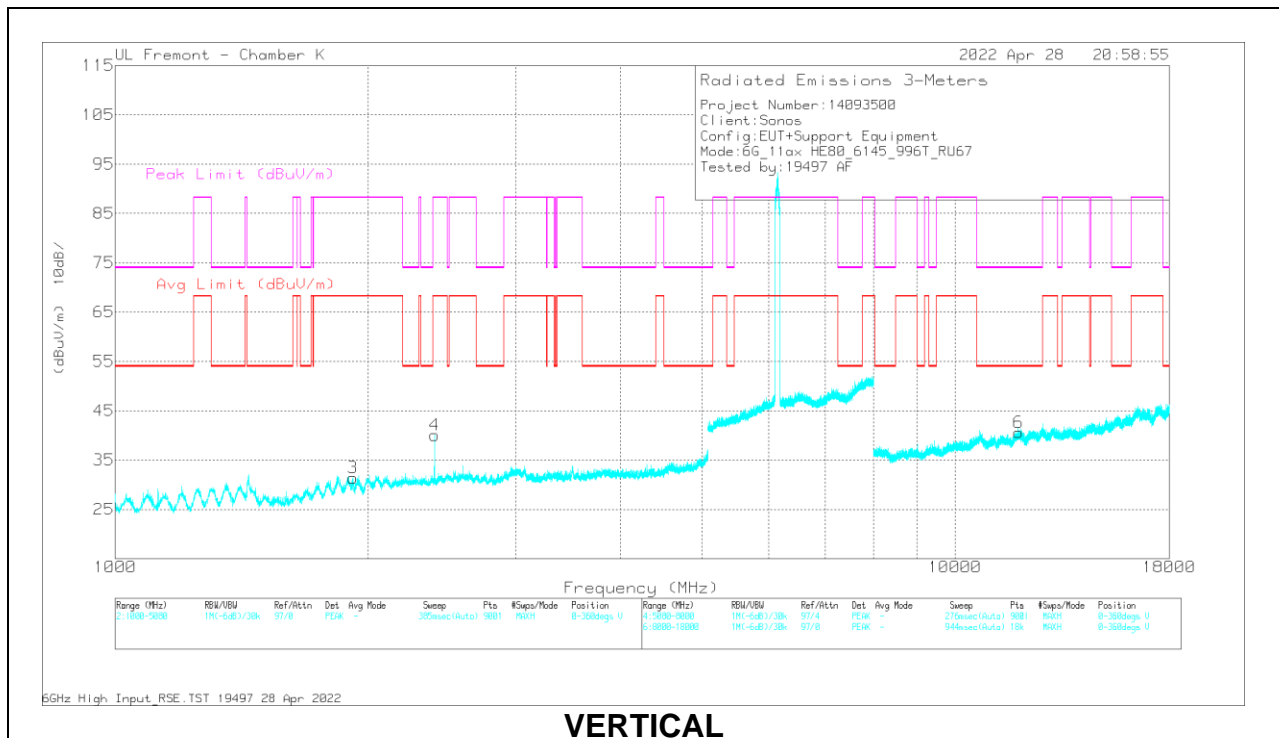

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1919.671	67.42	PK-U	31	-44.9	0	53.52	-	-	88.2	-34.68	216	200	H
	1920.027	49.1	ADR	31	-45	3.32	38.42	68.2	-29.78	-	-	216	200	H
2	2399.944	60.04	PK-U	32	-44.2	0	47.84	-	-	88.2	-40.36	133	176	H
	2400.065	51.44	ADR	32	-44.2	3.32	42.56	68.2	-25.64	-	-	133	176	H
3	1920.874	61.01	PK-U	31	-45.1	0	46.91	-	-	88.2	-41.29	183	240	V
	1920.114	44.18	ADR	31	-45	3.32	33.5	68.2	-34.7	-	-	183	240	V
4	2399.725	67.76	PK-U	32	-44.2	0	55.56	-	-	88.2	-32.64	205	141	V
	2400.033	47.69	ADR	32	-44.2	3.32	38.81	68.2	-29.39	-	-	205	141	V
5	* 11923.697	44.64	PK-U	38.7	-33.8	0	49.54	-	-	74	-24.46	307	205	H
	* 11922.418	33.1	ADR	38.7	-33.8	3.32	41.32	54	-12.68	-	-	307	205	H
6	* 11902.18	45.13	PK-U	38.7	-33.7	0	50.13	-	-	74	-23.87	44	289	V
	* 11904.206	33.41	ADR	38.7	-33.7	3.32	41.73	54	-12.27	-	-	44	289	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL

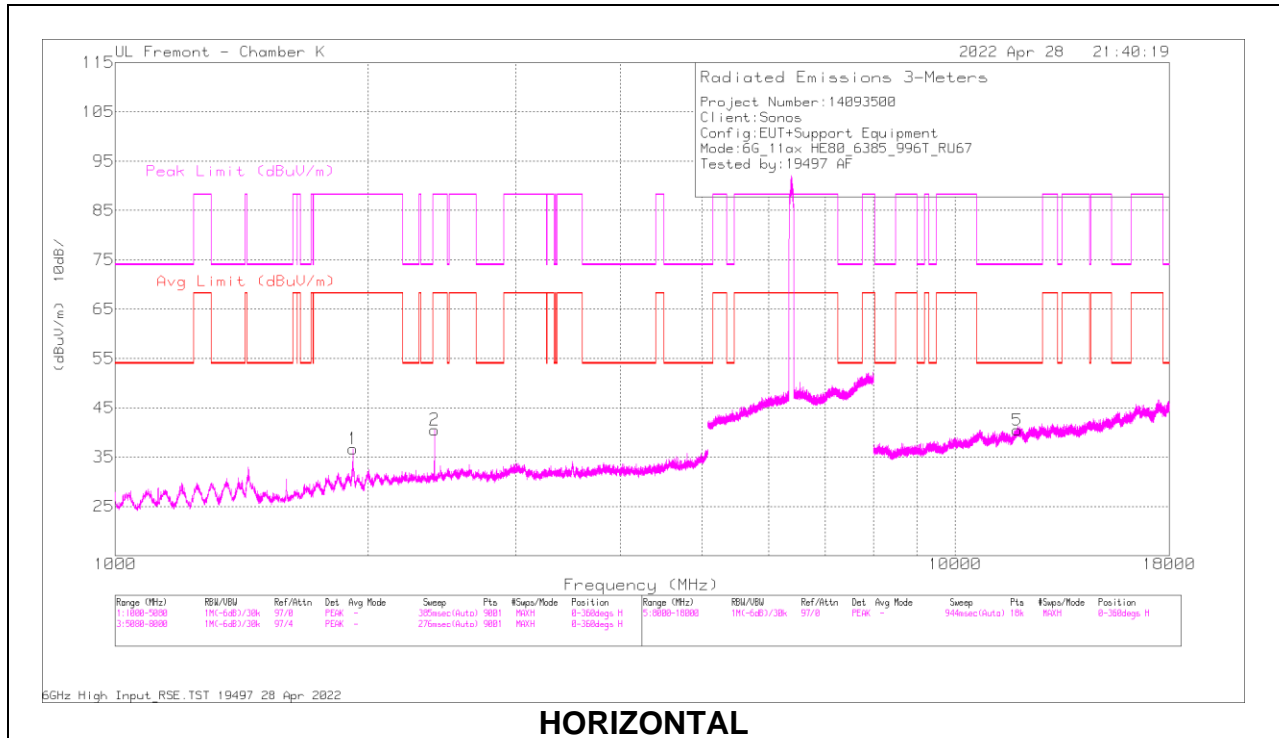

HORIZONTAL

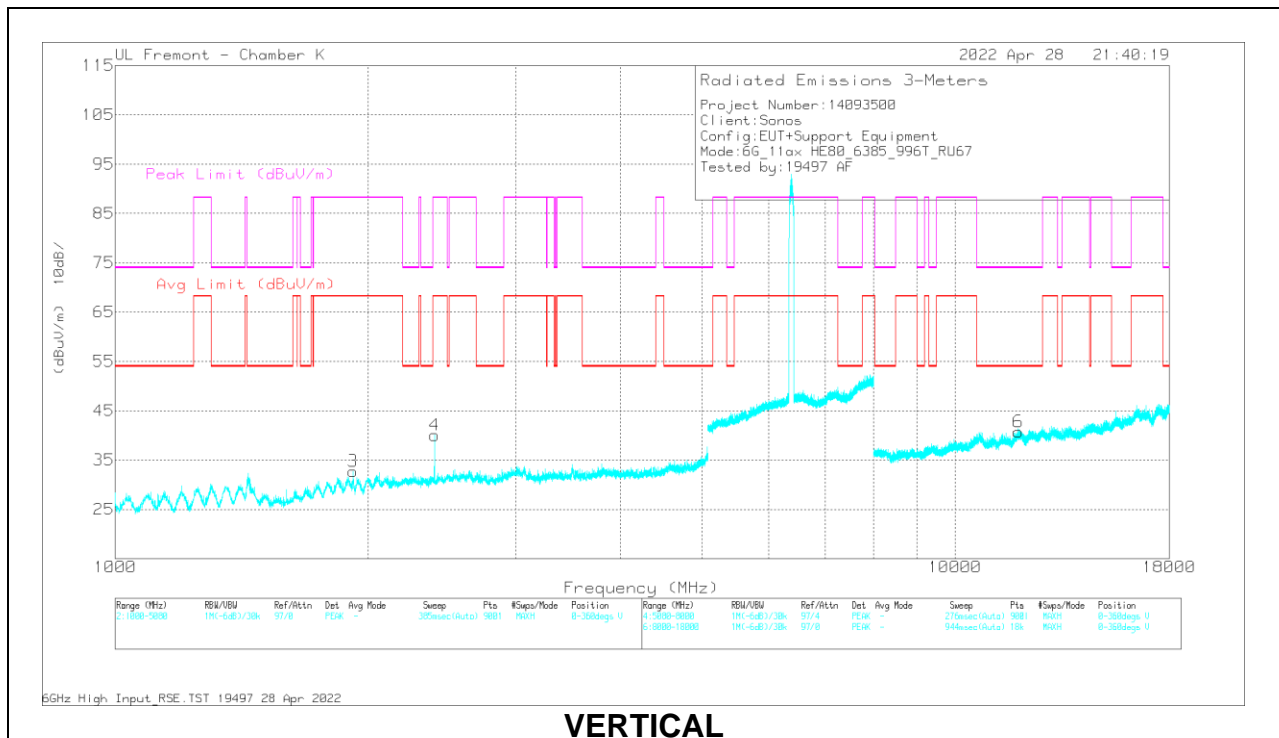

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1919.417	67.5	PK-U	31	-44.9	0	53.6	-	-	88.2	-34.6	216	202	H
	1920.006	49.21	ADR	31	-45	3.32	38.53	68.2	-29.67	-	-	216	202	H
2	2399.948	60.08	PK-U	32	-44.2	0	47.88	-	-	88.2	-40.32	133	110	H
	2400.025	50.82	ADR	32	-44.2	3.32	41.94	68.2	-26.26	-	-	133	110	H
3	1920.164	72.69	PK-U	31	-45	0	58.69	-	-	88.2	-29.51	26	104	V
	1920.036	44.26	ADR	31	-45	3.32	33.58	68.2	-34.62	-	-	26	104	V
4	2400.096	59.65	PK-U	32	-44.2	0	47.45	-	-	88.2	-40.75	13	121	V
	2399.993	51.8	ADR	32	-44.2	3.32	42.92	68.2	-25.28	-	-	13	121	V
5	* 11861.746	45.58	PK-U	38.7	-34	0	50.28	-	-	74	-23.72	127	379	H
	* 11862.913	33.38	ADR	38.7	-34	3.32	41.4	54	-12.6	-	-	127	379	H
6	* 11899.126	44.72	PK-U	38.7	-33.7	0	49.72	-	-	74	-24.28	84	177	V
	* 11897.883	33.45	ADR	38.7	-33.7	3.32	41.77	54	-12.23	-	-	84	177	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.4. TX ABOVE 1 GHz 802.11ax HE20 MODE IN THE UNII-6 BAND


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 0

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

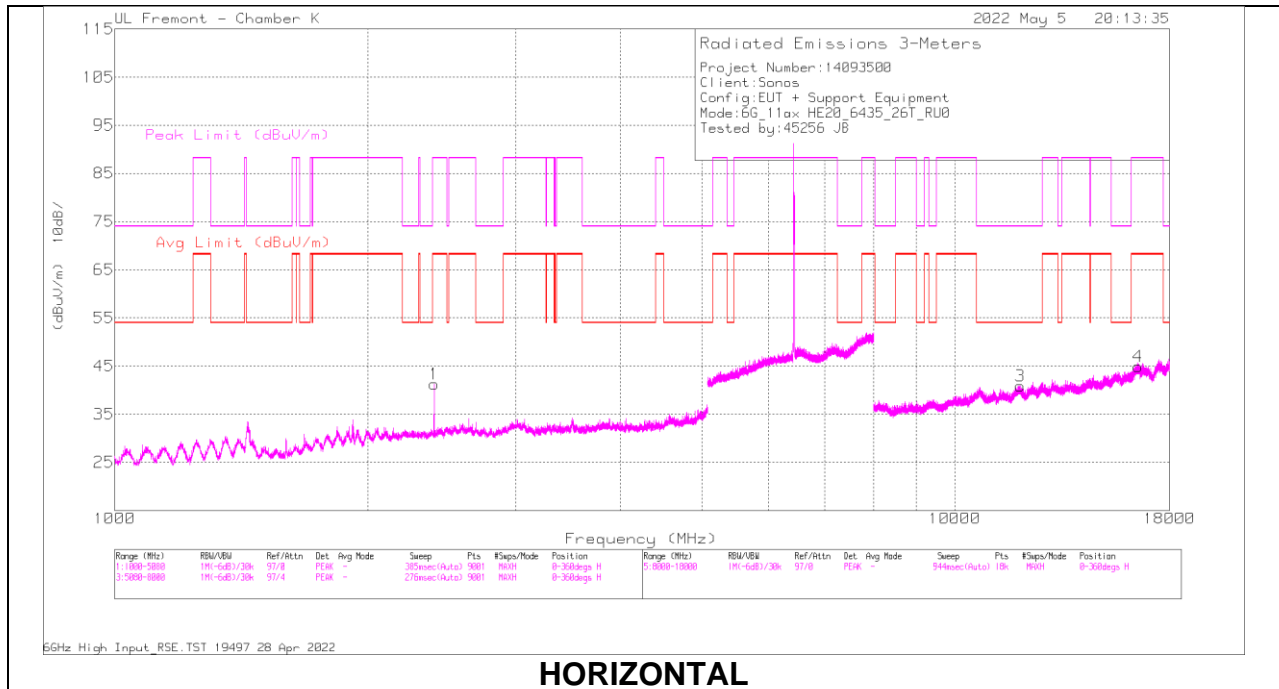

HORIZONTAL

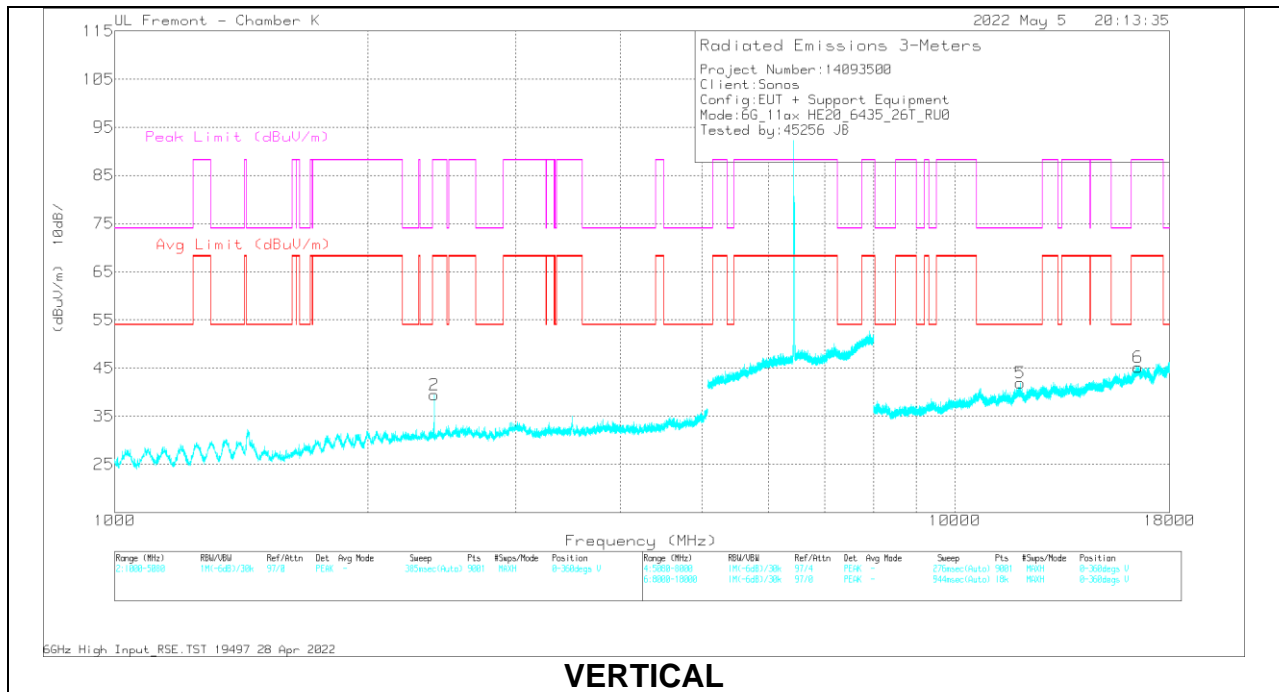

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.104	62.59	PK-U	32	-44.2	0	50.39	-	-	88.2	-37.81	148	263	H
	2400.079	50.18	ADR	32	-44.2	2.02	40	68.2	-28.2	-	-	148	263	H
2	2400.316	58.24	PK-U	32	-44.2	0	46.04	-	-	88.2	-42.16	196	232	V
	2400.033	49.88	ADR	32	-44.2	2.02	39.7	68.2	-28.5	-	-	196	232	V
4	16522.597	44.71	PK-U	41.7	-32	0	54.41	-	-	88.2	-33.79	113	225	H
	16520.658	34.4	ADR	41.7	-32.1	2.02	46.02	68.2	-22.18	-	-	113	225	H
3	* 11951.881	44.51	PK-U	38.7	-33.3	0	49.91	-	-	74	-24.09	89	187	H
	* 11952.368	32.85	ADR	38.7	-33.3	2.02	40.27	54	-13.73	-	-	89	187	H
6	16524.755	44.35	PK-U	41.7	-32	0	54.05	-	-	88.2	-34.15	46	101	V
	16521.774	34.38	ADR	41.7	-32	2.02	46.1	68.2	-22.1	-	-	46	101	V
5	* 11950.422	44.78	PK-U	38.7	-33.4	0	50.08	-	-	74	-23.92	340	324	V
	* 11953.799	32.93	ADR	38.7	-33.3	2.02	40.35	54	-13.65	-	-	340	324	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 4

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL

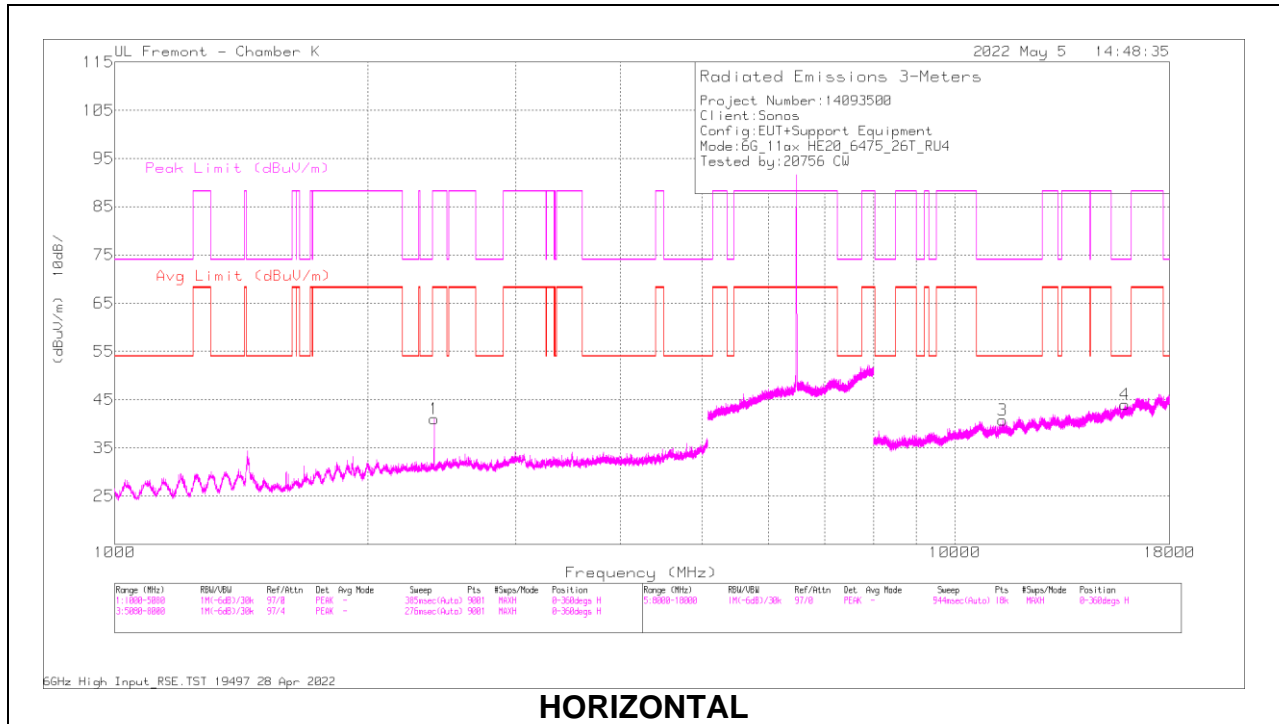

HORIZONTAL

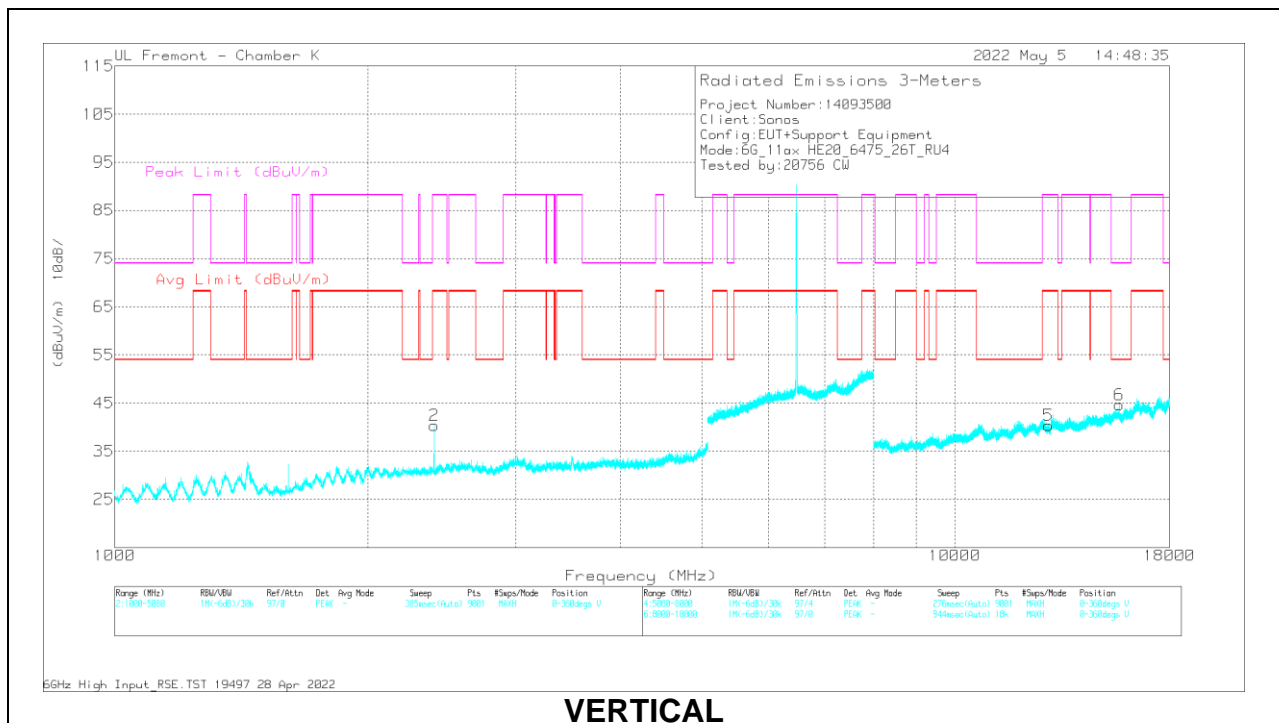

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2399.92	62.49	PK-U	32	-44.2	0	50.29	-	-	88.2	-37.91	147	231	H
	2400.072	55.25	ADR	32	-44.2	2.02	45.07	68.2	-23.13	-	-	147	231	H
2	2399.9	60.41	PK-U	32	-44.2	0	48.21	-	-	88.2	-39.99	198	176	V
	2400	52.77	ADR	32	-44.2	2.02	42.59	68.2	-25.61	-	-	198	176	V
3	* 11391.576	46.02	PK-U	38.2	-34.8	0	49.42	-	-	74	-24.58	229	159	H
	* 11391.744	34.27	ADR	38.2	-34.8	2.02	39.69	54	-14.31	-	-	229	159	H
4	* 15924.606	44.46	PK-U	40.6	-32.1	0	52.96	-	-	74	-21.04	349	372	H
	* 15924.684	32.62	ADR	40.6	-32.1	2.02	43.14	54	-10.86	-	-	349	372	H
5	12933.765	44.25	PK-U	39.2	-33.2	0	50.25	-	-	88.2	-37.95	109	390	V
	12933.206	32.39	ADR	39.2	-33.2	2.02	40.41	68.2	-27.79	-	-	109	390	V
6	* 15686.867	44.61	PK-U	40.5	-32.2	0	52.91	-	-	74	-21.09	258	219	V
	* 15686.929	33.15	ADR	40.5	-32.2	2.02	43.47	54	-10.53	-	-	258	219	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 8

HARMONICS AND SPURIOUS EMISSIONS

HIGH CHANNEL

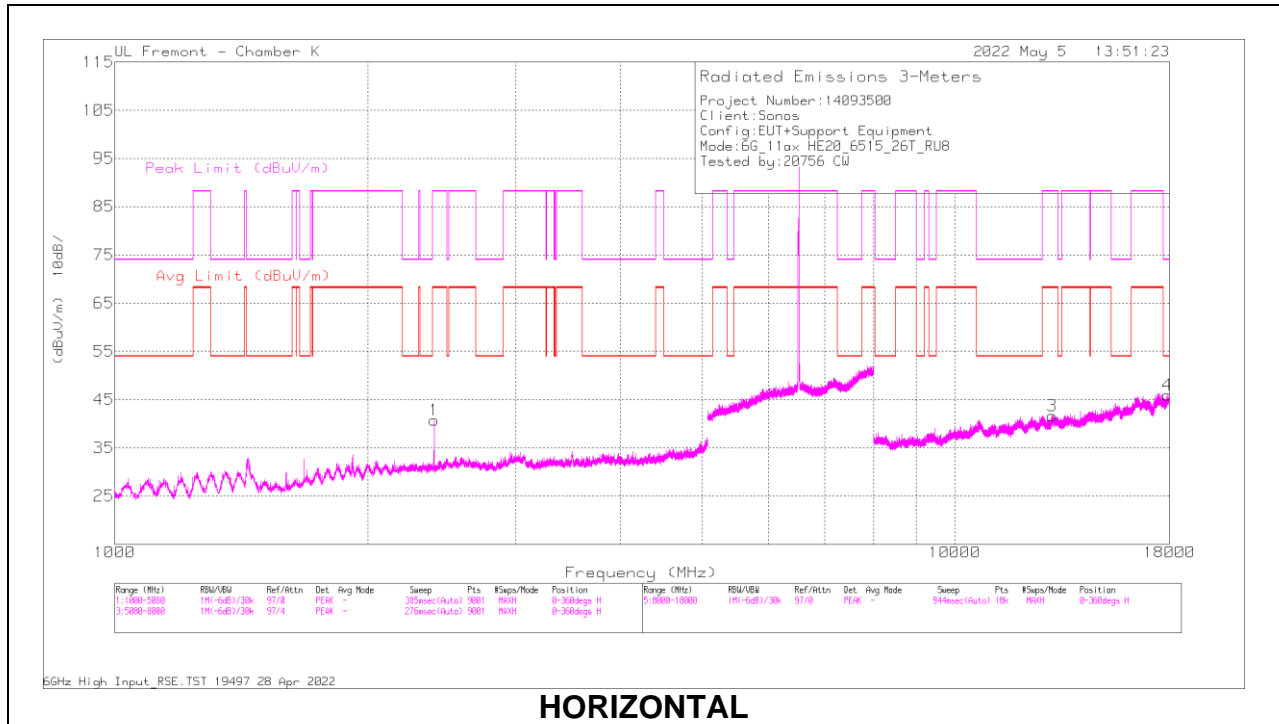

HORIZONTAL

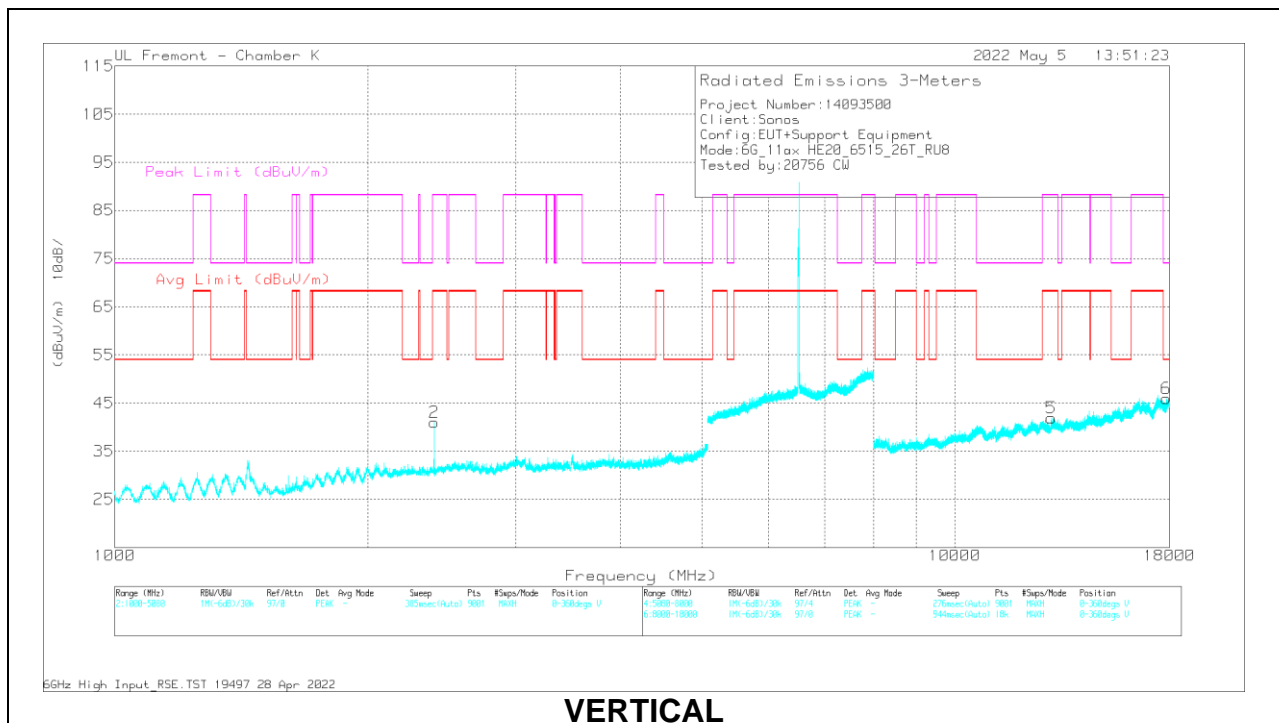

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2399.928	62.07	PK-U	32	-44.2	0	49.87	-	-	88.2	-38.33	149	265	H
	2400.012	54.88	ADR	32	-44.2	2.02	44.7	68.2	-23.5	-	-	149	265	H
2	2399.721	60.5	PK-U	32	-44.2	0	48.3	-	-	88.2	-39.9	201	202	V
	2400.04	52.9	ADR	32	-44.2	2.02	42.72	68.2	-25.48	-	-	201	202	V
3	13049.339	44.32	PK-U	39.3	-33.2	0	50.42	-	-	88.2	-37.78	201	100	H
	13051.341	32.9	ADR	39.3	-33.2	2.02	41.02	68.2	-27.18	-	-	201	100	H
4	* 17894.071	44.14	PK-U	41.8	-30.2	0	55.74	-	-	74	-18.26	279	230	H
	* 17893.787	31.74	ADR	41.8	-30.2	2.02	45.36	54	-8.64	-	-	279	230	H
5	13019.9	44.01	PK-U	39.2	-32.9	0	50.31	-	-	88.2	-37.89	224	253	V
	13023.029	32.64	ADR	39.3	-33	2.02	40.96	68.2	-27.24	-	-	224	253	V
6	* 17845.377	43.27	PK-U	41.9	-30.1	0	55.07	-	-	74	-18.93	182	358	V
	* 17845.634	31.6	ADR	41.9	-30.1	2.02	45.42	54	-8.58	-	-	182	358	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 1 + Antenna 4 OFDMA MODE: 242-Tones, RU Index 61

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

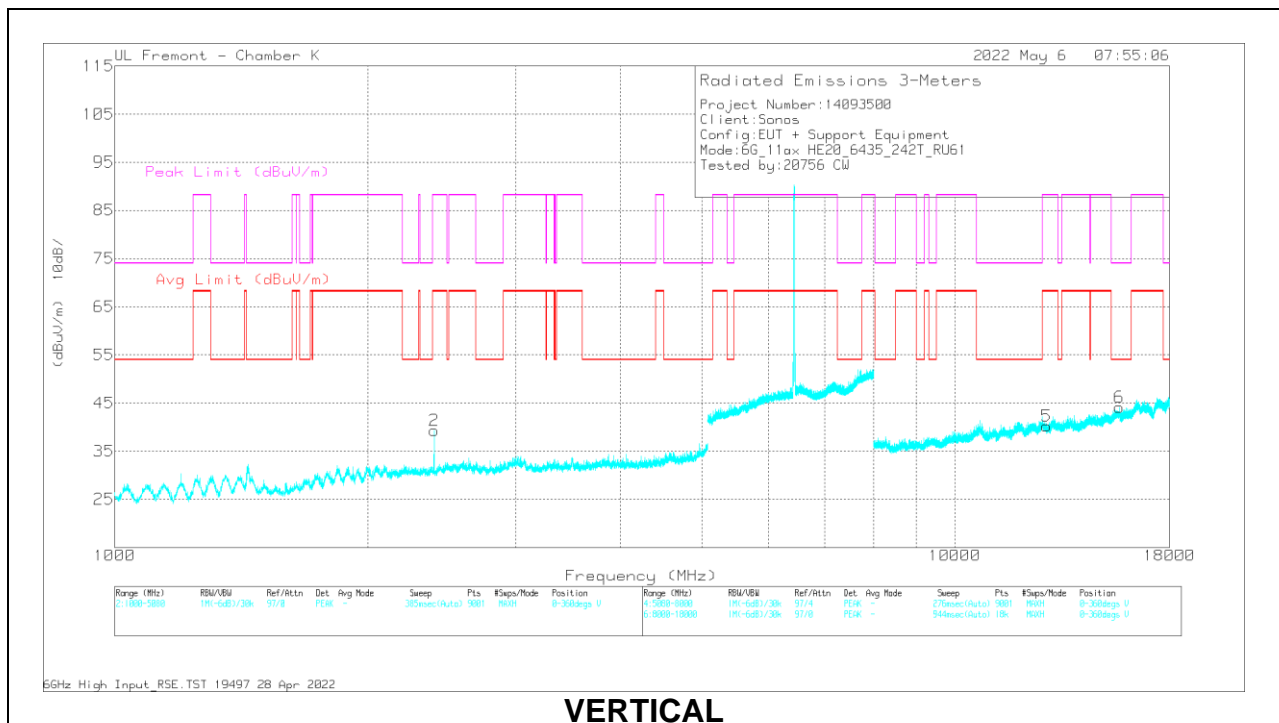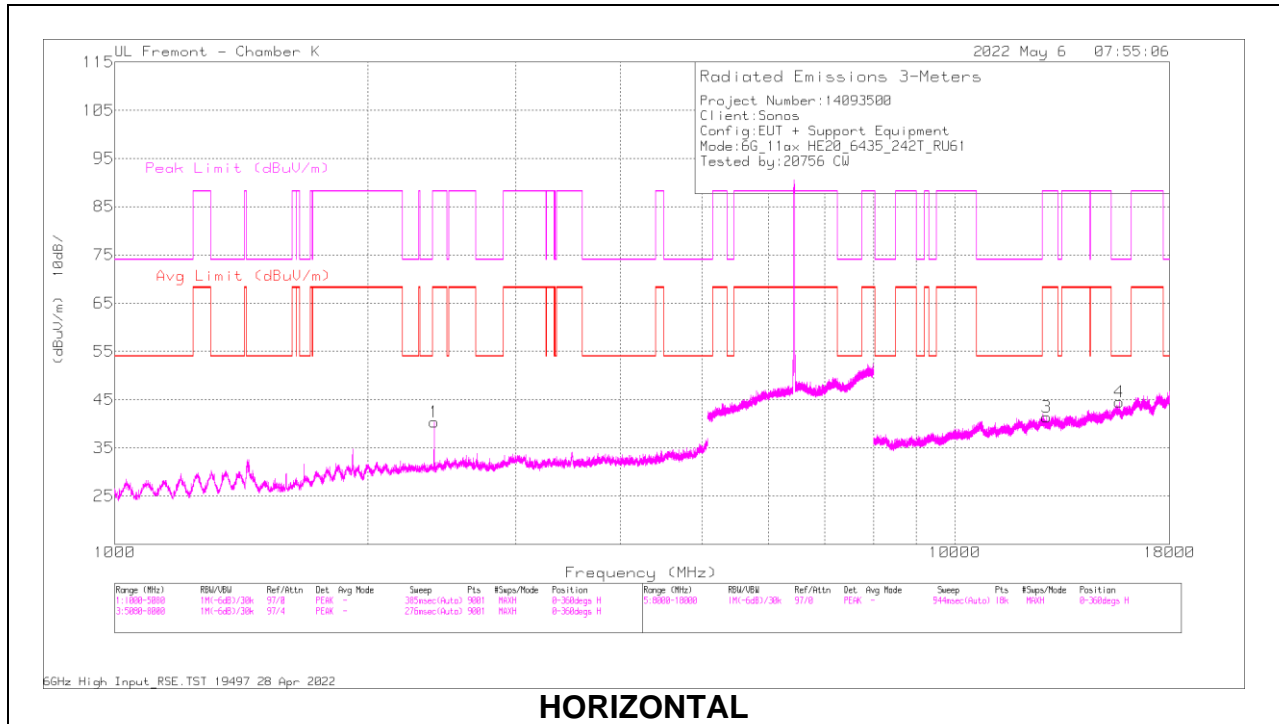

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.028	61.48	PK-U	32	-44.2	0	49.28	-	-	88.2	-38.92	139	200	H
	2400.02	53.61	ADR	32	-44.2	2.92	44.33	68.2	-23.87	-	-	139	200	H
2	2399.998	60.06	PK-U	32	-44.2	0	47.86	-	-	88.2	-40.34	194	222	V
	2400.098	52.43	ADR	32	-44.2	2.92	43.15	68.2	-25.05	-	-	194	222	V
3	12852.439	44.59	PK-U	39.3	-33.3	0	50.59	-	-	88.2	-37.61	184	198	H
	12854.485	32.21	ADR	39.3	-33.3	2.92	41.13	68.2	-27.07	-	-	184	198	H
4	* 15696.382	44.48	PK-U	40.5	-32.2	0	52.78	-	-	74	-21.22	334	386	H
	* 15696.104	32.99	ADR	40.5	-32.2	2.92	44.21	54	-9.79	-	-	334	386	H
5	12858.186	43.86	PK-U	39.3	-33.3	0	49.86	-	-	88.2	-38.34	354	103	V
	12860.252	32.01	ADR	39.3	-33.3	2.92	40.93	68.2	-27.27	-	-	354	103	V
6	* 15697.489	44.56	PK-U	40.5	-32.2	0	52.86	-	-	74	-21.14	232	348	V
	* 15697.442	33.13	ADR	40.5	-32.2	2.92	44.35	54	-9.65	-	-	232	348	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL

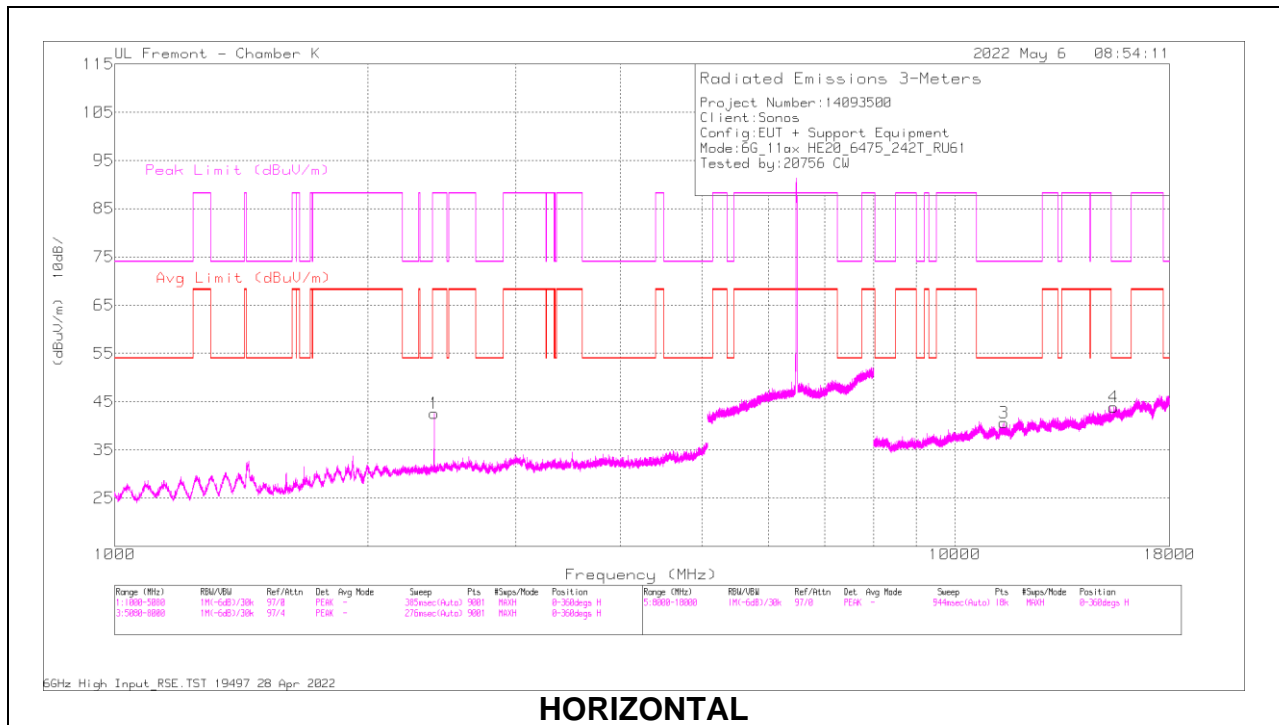

HORIZONTAL

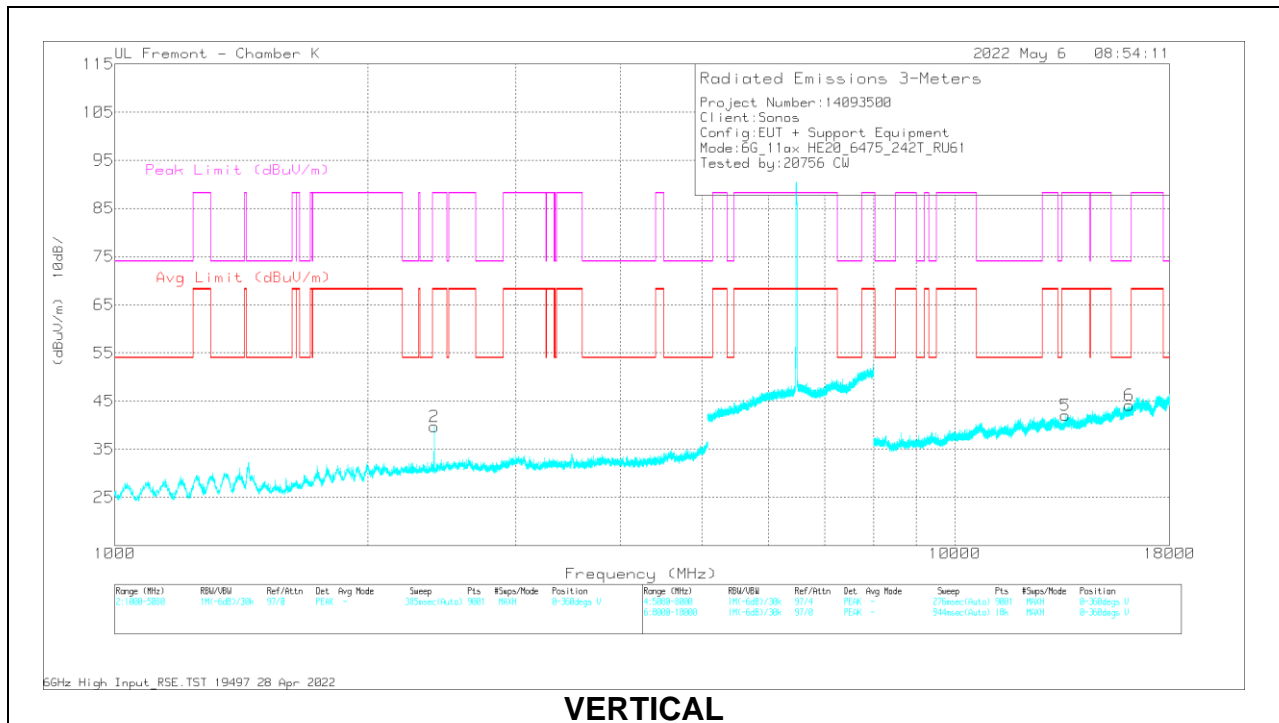

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.128	61.06	PK-U	32	-44.2	0	48.86	-	-	88.2	-39.34	141	203	H
	2400.044	54.04	ADR	32	-44.2	2.92	44.76	68.2	-23.44	-	-	141	203	H
2	2400.364	66.3	PK-U	32	-44.2	0	54.1	-	-	88.2	-34.1	332	98	V
	2400.02	51.57	ADR	32	-44.2	2.92	42.29	68.2	-25.91	-	-	332	98	V
3	* 11447.804	45.5	PK-U	38.2	-34.6	0	49.1	-	-	74	-24.9	254	224	H
	* 11447.456	33.74	ADR	38.2	-34.6	2.92	40.26	54	-13.74	-	-	254	224	H
4	* 15452.523	43.78	PK-U	40.7	-32.4	0	52.08	-	-	74	-21.92	61	351	H
	* 15452.505	32.06	ADR	40.7	-32.4	2.92	43.28	54	-10.72	-	-	61	351	H
5	13524.78	45.3	PK-U	38.8	-33.1	0	51	-	-	88.2	-37.2	187	345	V
	13522.726	32.91	ADR	38.8	-33.1	2.92	41.53	68.2	-26.67	-	-	187	345	V
6	* 16132.354	44.3	PK-U	41.1	-32.3	0	53.1	-	-	74	-20.9	178	324	V
	* 16132.302	32.51	ADR	41.1	-32.3	2.92	44.23	54	-9.77	-	-	178	324	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL

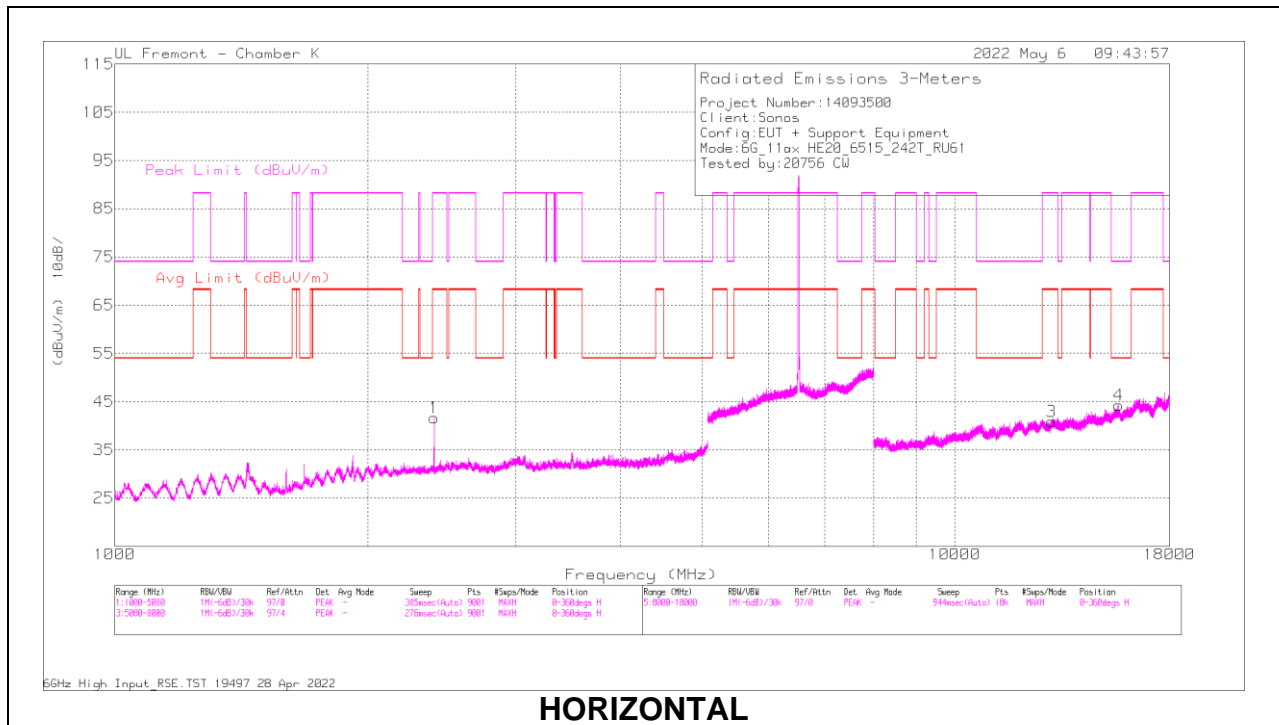

HORIZONTAL

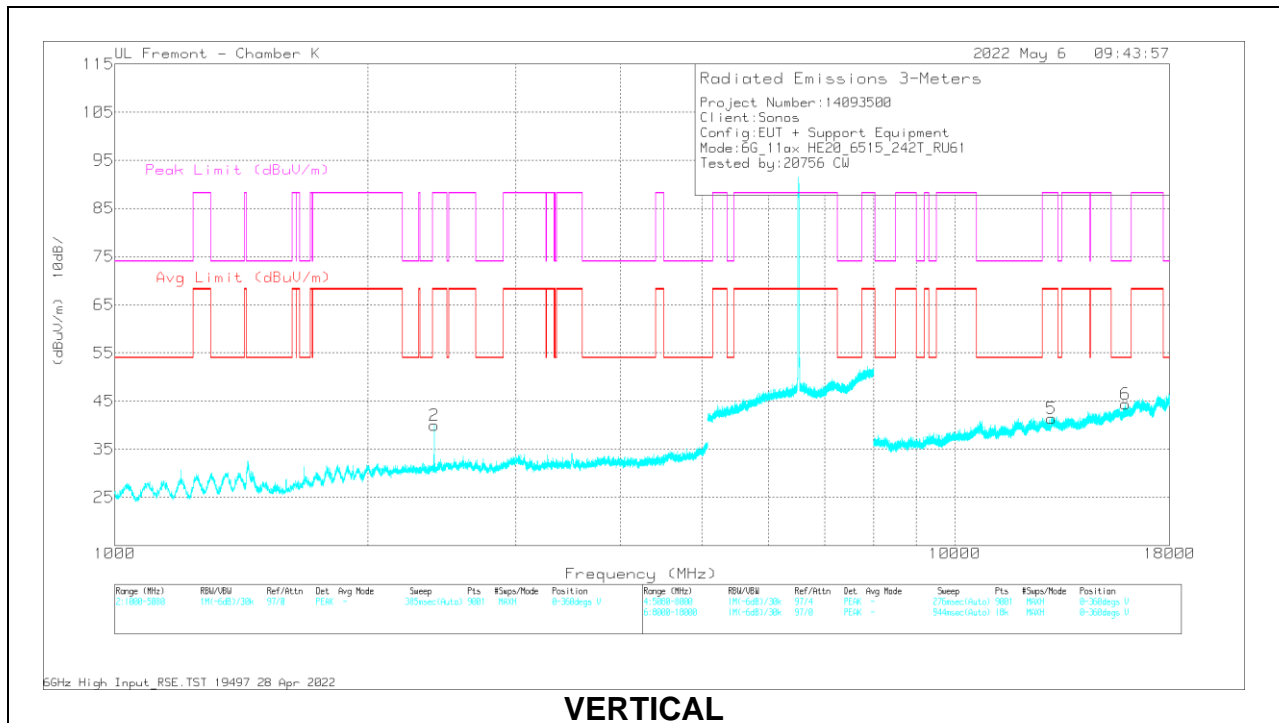

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.208	61.29	PK-U	32	-44.2	0	49.09	-	-	88.2	-39.11	139	199	H
	2400.072	53.61	ADR	32	-44.2	2.92	44.33	68.2	-23.87	-	-	139	199	H
2	2399.729	59.46	PK-U	32	-44.2	0	47.26	-	-	88.2	-40.94	332	102	V
	2400.036	51.66	ADR	32	-44.2	2.92	42.4	68.2	-25.8	-	-	332	102	V
3	13024.584	44.16	PK-U	39.2	-33	0	50.36	-	-	88.2	-37.84	58	176	H
	13024.78	32.59	ADR	39.2	-33	2.92	41.71	68.2	-26.49	-	-	58	176	H
4	* 15672.807	44.86	PK-U	40.6	-32.3	0	53.16	-	-	74	-20.84	246	271	H
	* 15672.773	32.92	ADR	40.6	-32.3	2.92	44.14	54	-9.86	-	-	246	271	H
5	13027.042	44.32	PK-U	39.2	-33	0	50.52	-	-	88.2	-37.68	186	373	V
	13027.713	32.87	ADR	39.2	-33	2.92	41.99	68.2	-26.21	-	-	186	373	V
6	* 15950.163	44.5	PK-U	40.6	-32.2	0	52.9	-	-	74	-21.1	269	247	V
	* 15950.126	32.36	ADR	40.6	-32.2	2.92	43.68	54	-10.32	-	-	269	247	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.5. TX ABOVE 1 GHz 802.11ax HE40 MODE IN THE UNII-6 BAND


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 0

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

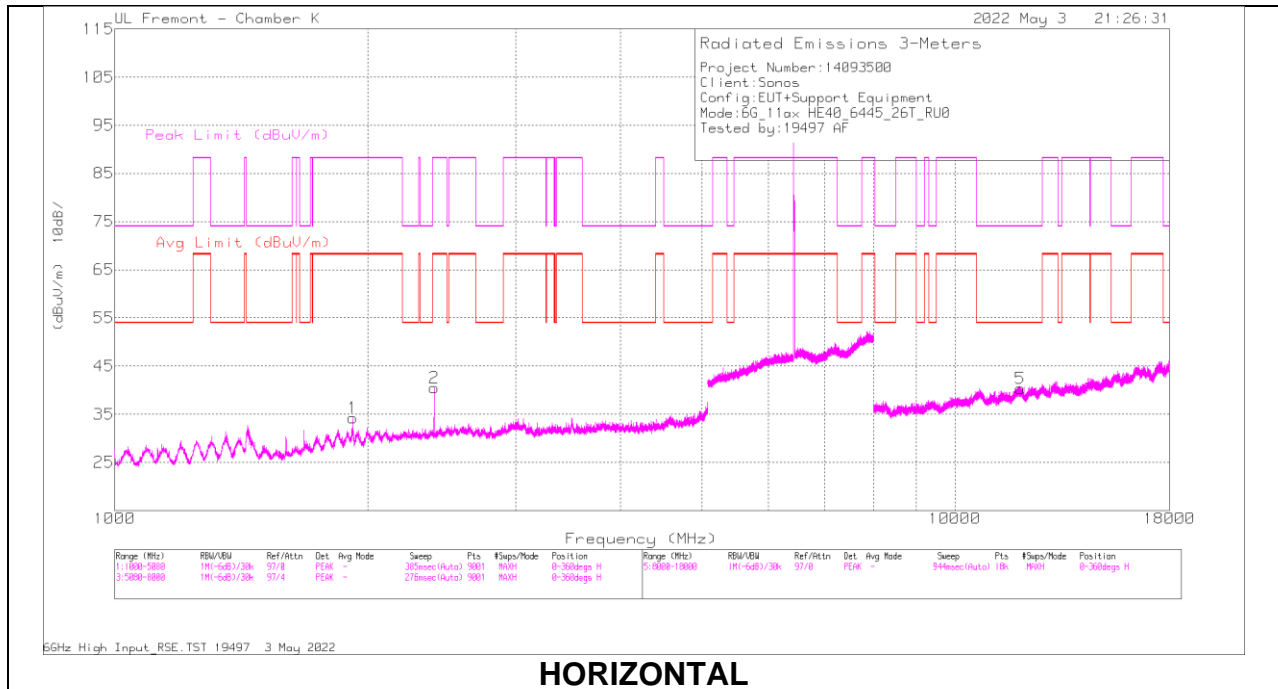

HORIZONTAL

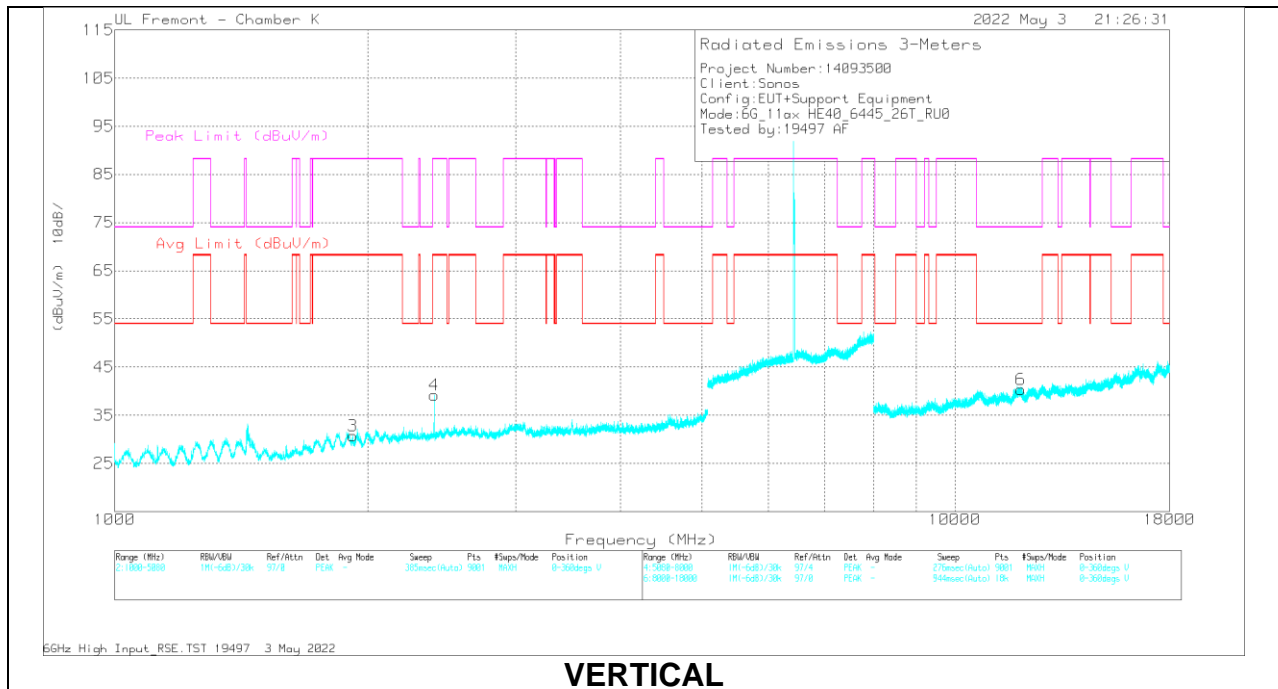

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	2400.156	59.9	PK-U	32	-44.2	0	47.7	-	-	88.2	-40.5	173	233	H
	2400.016	50.04	ADR	32	-44.2	2.01	39.85	68.2	-28.35	-	-	173	233	H
1	1920.804	62.61	PK-U	31	-45.1	0	48.51	-	-	88.2	-39.69	162	197	H
	1919.982	45.59	ADR	31	-45	2.01	33.6	68.2	-34.6	-	-	162	197	H
4	2399.477	59.12	PK-U	32	-44.2	0	46.92	-	-	88.2	-41.28	24	110	V
	2400.002	49.83	ADR	32	-44.2	2.01	39.64	68.2	-28.56	-	-	24	110	V
3	1919.261	56.22	PK-U	31	-44.9	0	42.32	-	-	88.2	-45.88	151	183	V
	1920.117	42.76	ADR	31	-45	2.01	30.77	68.2	-37.43	-	-	151	183	V
5	* 11967.975	44.32	PK-U	38.8	-33.4	0	49.72	-	-	74	-24.28	277	225	H
	* 11967.919	32.66	ADR	38.8	-33.4	2.01	40.07	54	-13.93	-	-	277	225	H
6	* 11987.906	44.06	PK-U	38.8	-33.3	0	49.56	-	-	74	-24.44	162	109	V
	* 11986.943	32.4	ADR	38.8	-33.3	2.01	39.91	54	-14.09	-	-	162	109	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 17

HARMONICS AND SPURIOUS EMISSIONS

HIGH CHANNEL

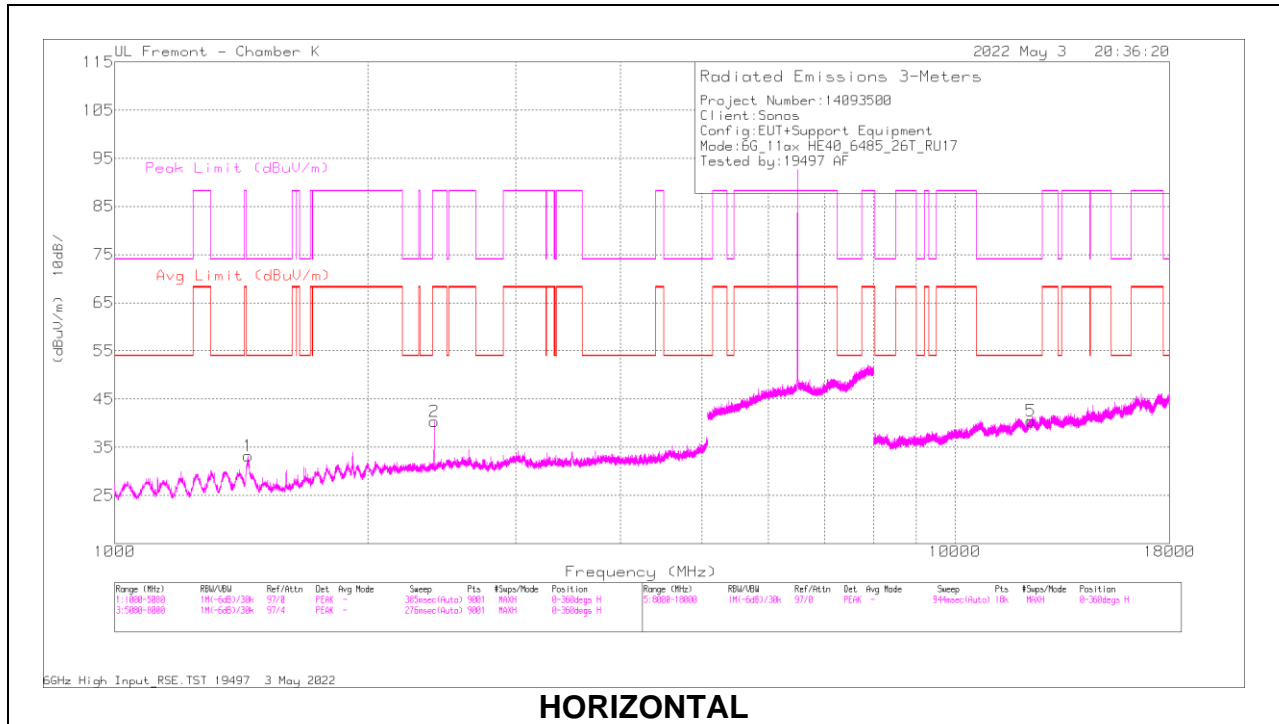

HORIZONTAL

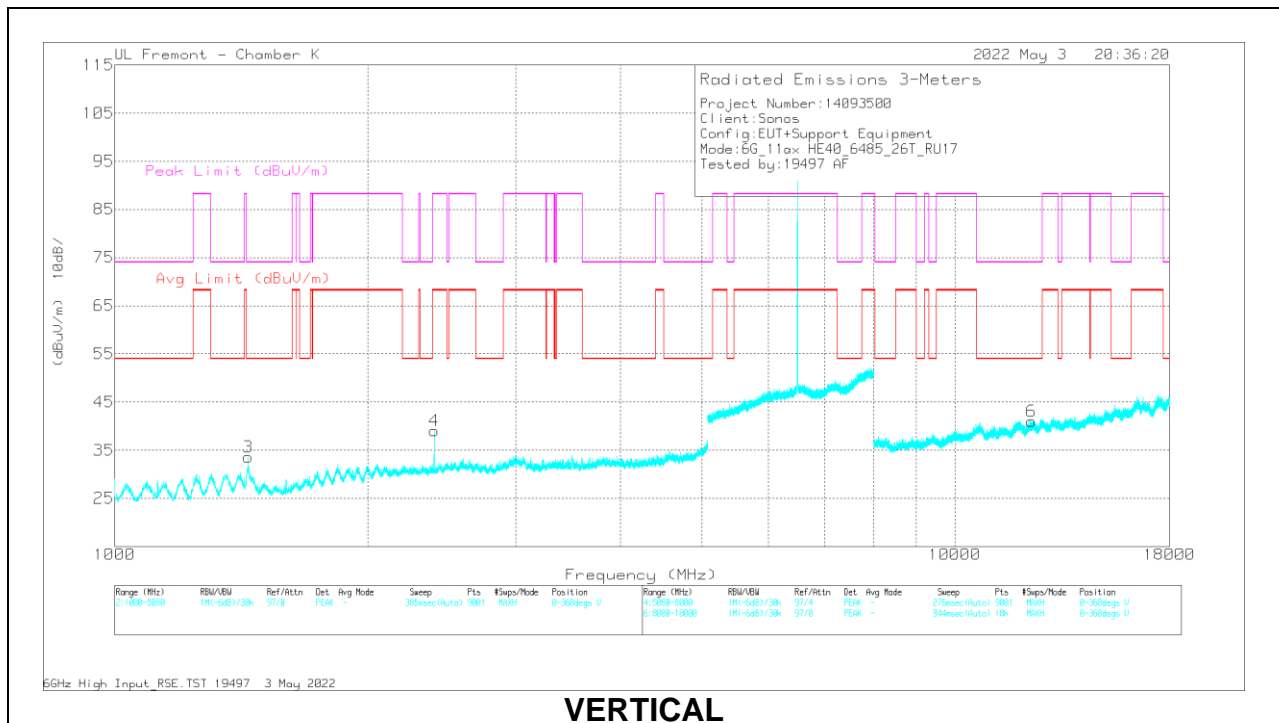

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1441.144	60.38	PK-U	29	-45.7	0	43.68	-	-	74	-30.32	332	228	H
	* 1442.082	43.85	ADR	29	-45.6	2.01	29.26	54	-24.74	-	-	332	228	H
2	2400.28	56.74	PK-U	32	-44.2	0	44.54	-	-	88.2	-43.66	7	365	H
	2400.407	42.01	ADR	32	-44.2	2.01	31.82	68.2	-36.38	-	-	7	365	H
3	* 1440.289	71.66	PK-U	29	-45.7	0	54.96	-	-	74	-19.04	65	201	V
	* 1442.263	46.15	ADR	29	-45.6	2.01	31.56	54	-22.44	-	-	65	201	V
4	2400.168	58.28	PK-U	32	-44.2	0	46.08	-	-	88.2	-42.12	208	176	V
	2400.052	50.65	ADR	32	-44.2	2.01	40.46	68.2	-27.74	-	-	209	176	V
5	* 12322.528	45.07	PK-U	39.1	-33.5	0	50.67	-	-	74	-23.33	177	395	H
	* 12324.574	33.03	ADR	39	-33.5	2.01	40.54	54	-13.46	-	-	177	395	H
6	* 12329.746	44.4	PK-U	39.1	-33.4	0	50.1	-	-	74	-23.9	112	163	V
	* 12328.735	33.12	ADR	39.1	-33.5	2.01	40.73	54	-13.27	-	-	112	163	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STRADDLE CHANNEL

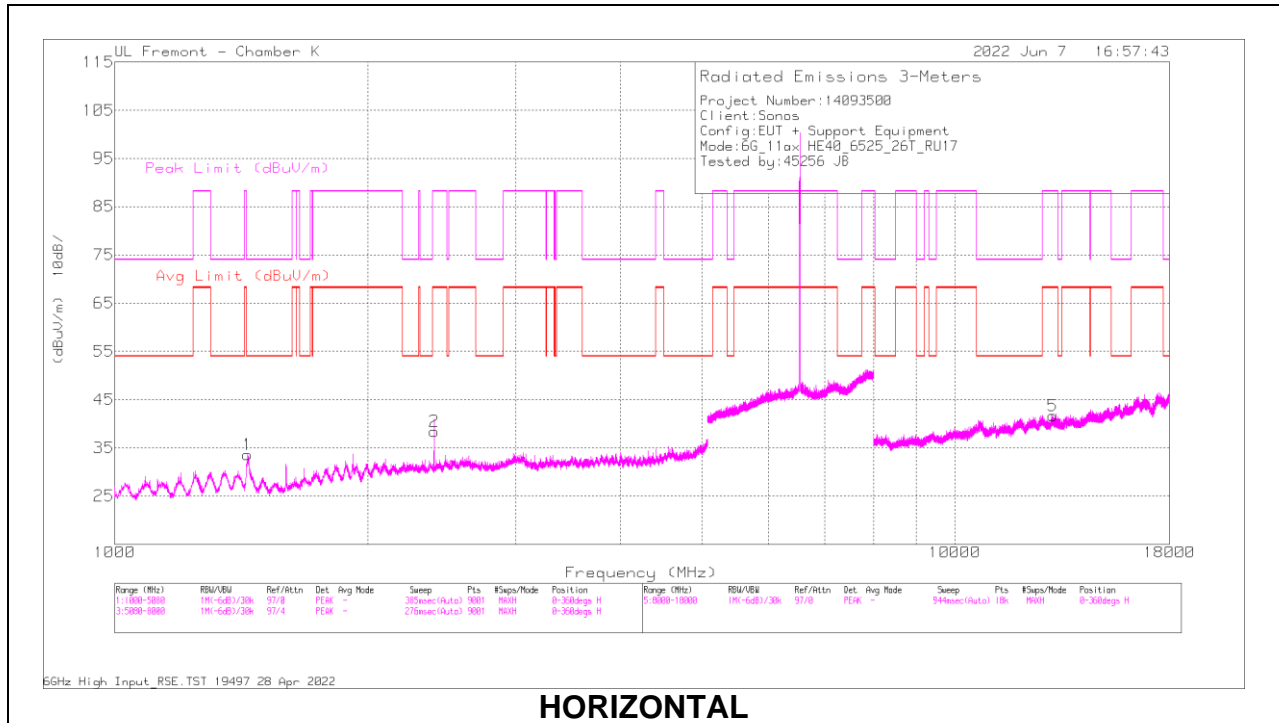

HORIZONTAL

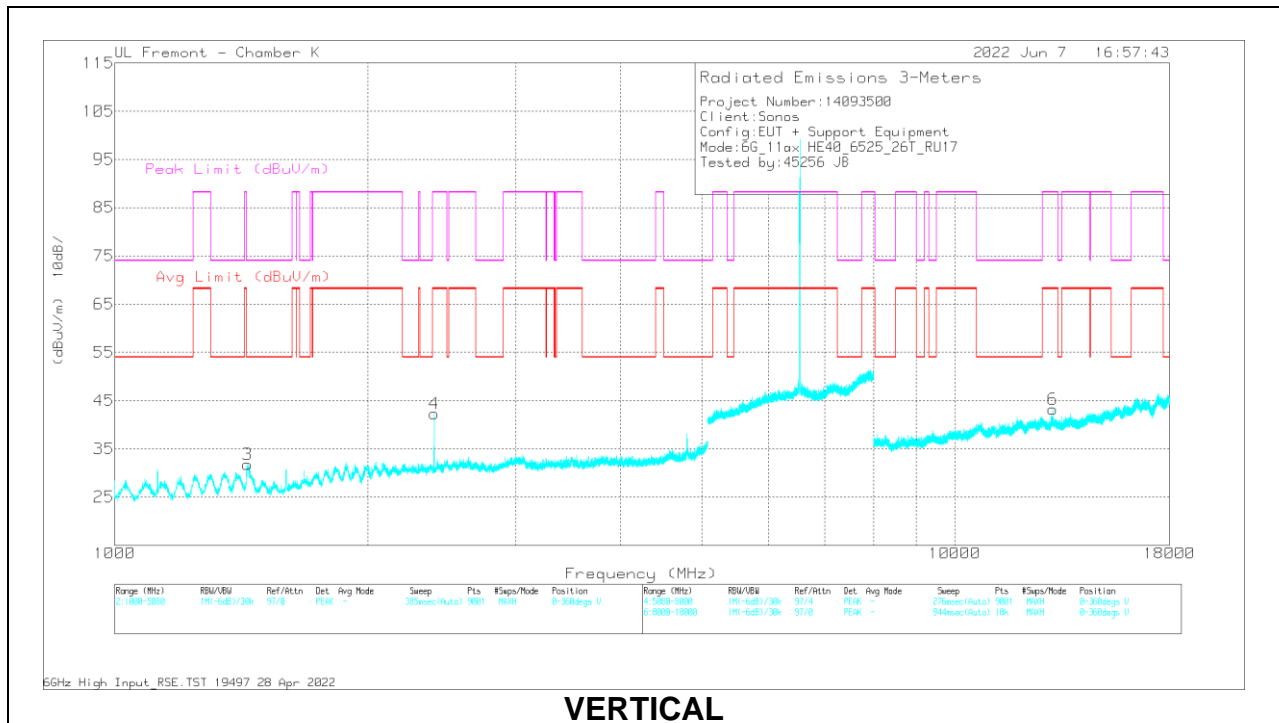

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cbl/Filtr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1439.663	70.2	PK-U	29	-46	0	53.2	-	-	74	-20.8	178	150	H
	* 1439.164	50.15	ADR	29	-46	2.01	35.16	54	-18.84	-	-	178	150	H
2	2400.078	57.48	PK-U	32	-44.6	0	44.88	-	-	88.2	-43.32	343	180	H
	2400.002	49.99	ADR	32	-44.6	2.01	39.4	68.2	-28.8	-	-	343	180	H
3	* 1439.931	77.56	PK-U	29	-46	0	60.56	-	-	74	-13.44	221	162	V
	* 1439.703	47.7	ADR	29	-46	2.01	32.71	54	-21.29	-	-	221	162	V
4	2401.247	59.82	PK-U	32	-44.7	0	47.12	-	-	88.2	-41.08	191	185	V
	2399.984	51.55	ADR	32	-44.6	2.01	40.96	68.2	-27.24	-	-	191	185	V
5	13082.354	45.86	PK-U	39.2	-34	0	51.06	-	-	88.2	-37.14	49	299	H
	13083.09	34.07	ADR	39.2	-33.9	2.01	41.38	68.2	-26.82	-	-	49	299	H
6	13087.054	53.02	PK-U	39.2	-34	0	58.22	-	-	88.2	-29.98	28	185	V
	13086.818	37.59	ADR	39.2	-34	2.01	44.8	68.2	-23.4	-	-	28	185	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 484-Tones, RU Index 65

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

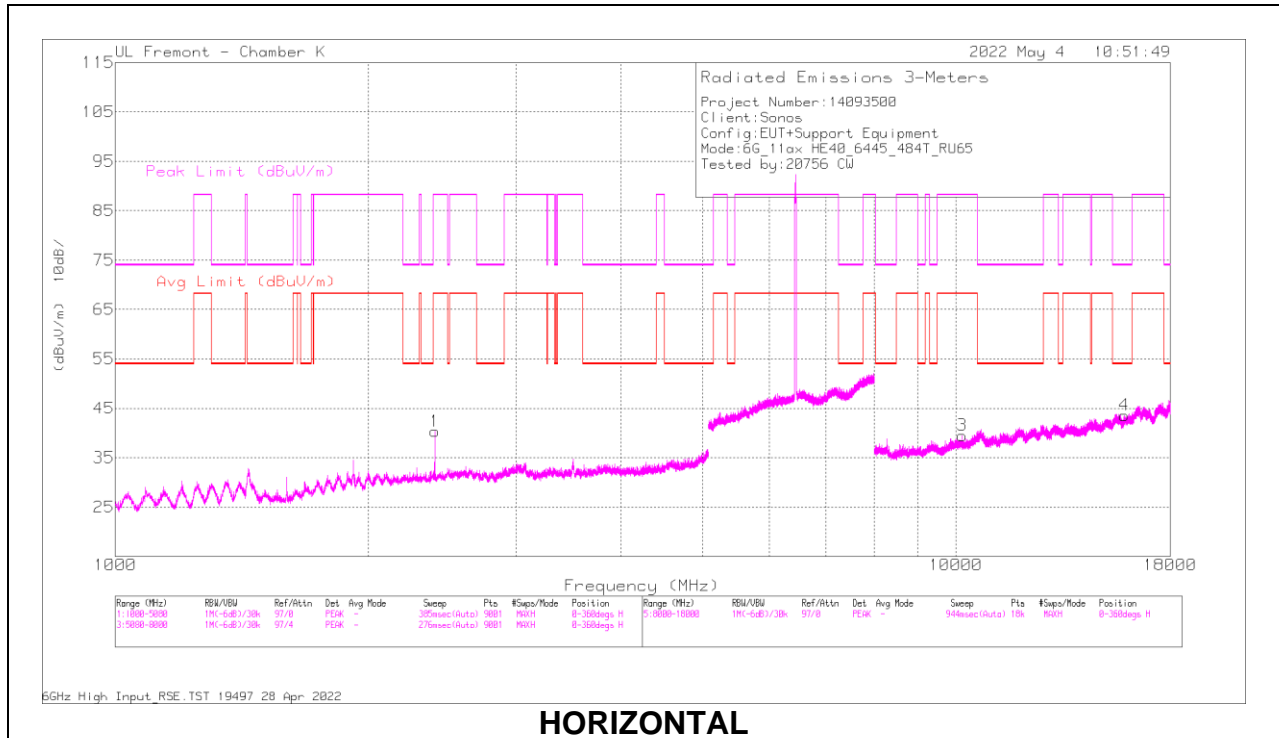

HORIZONTAL

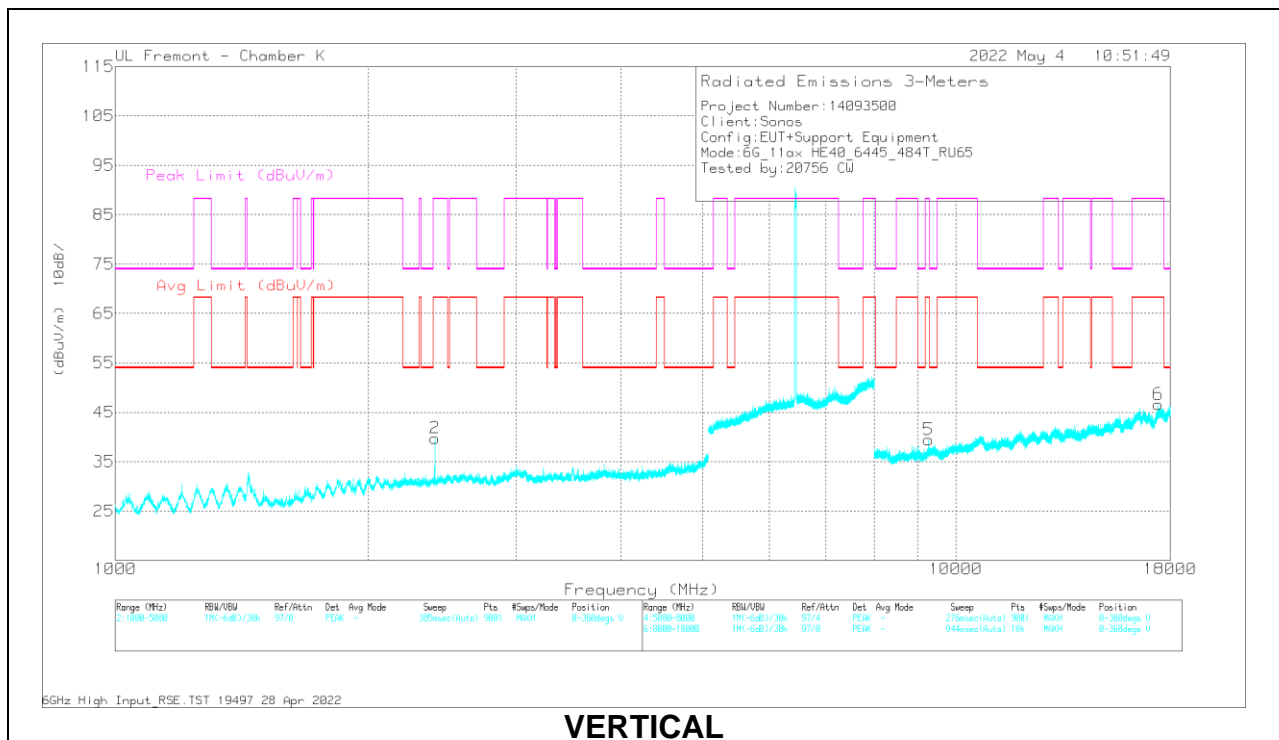

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2399.437	63.7	PK-U	32	-44.2	0	51.5	-	-	88.2	-36.7	289	104	H
	2400.104	52.44	ADR	32	-44.2	2.96	43.2	68.2	-25	-	-	289	104	H
2	2399.942	60.36	PK-U	32	-44.2	0	48.16	-	-	88.2	-40.04	199	170	V
	2400.074	52.9	ADR	32	-44.2	2.96	43.66	68.2	-24.54	-	-	199	170	V
3	10174.82	46.36	PK-U	37.5	-35.7	0	48.16	-	-	88.2	-40.04	314	305	H
	10174.673	34.15	ADR	37.5	-35.7	2.96	38.91	68.2	-29.29	-	-	314	305	H
4	* 15863.321	44.77	PK-U	40.5	-32.1	0	53.17	-	-	74	-20.83	327	229	H
	* 15863.455	32.34	ADR	40.5	-32.1	2.96	43.7	54	-10.3	-	-	327	229	H
5	9280.521	46.2	PK-U	36.5	-35.7	0	47	-	-	88.2	-41.2	171	255	V
	9280.497	34.63	ADR	36.5	-35.7	2.96	38.39	68.2	-29.81	-	-	171	255	V
6	17413.378	43.64	PK-U	41.5	-29.8	0	55.34	-	-	88.2	-32.86	356	182	V
	17413.556	32	ADR	41.5	-29.8	2.96	46.66	68.2	-21.54	-	-	356	182	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL

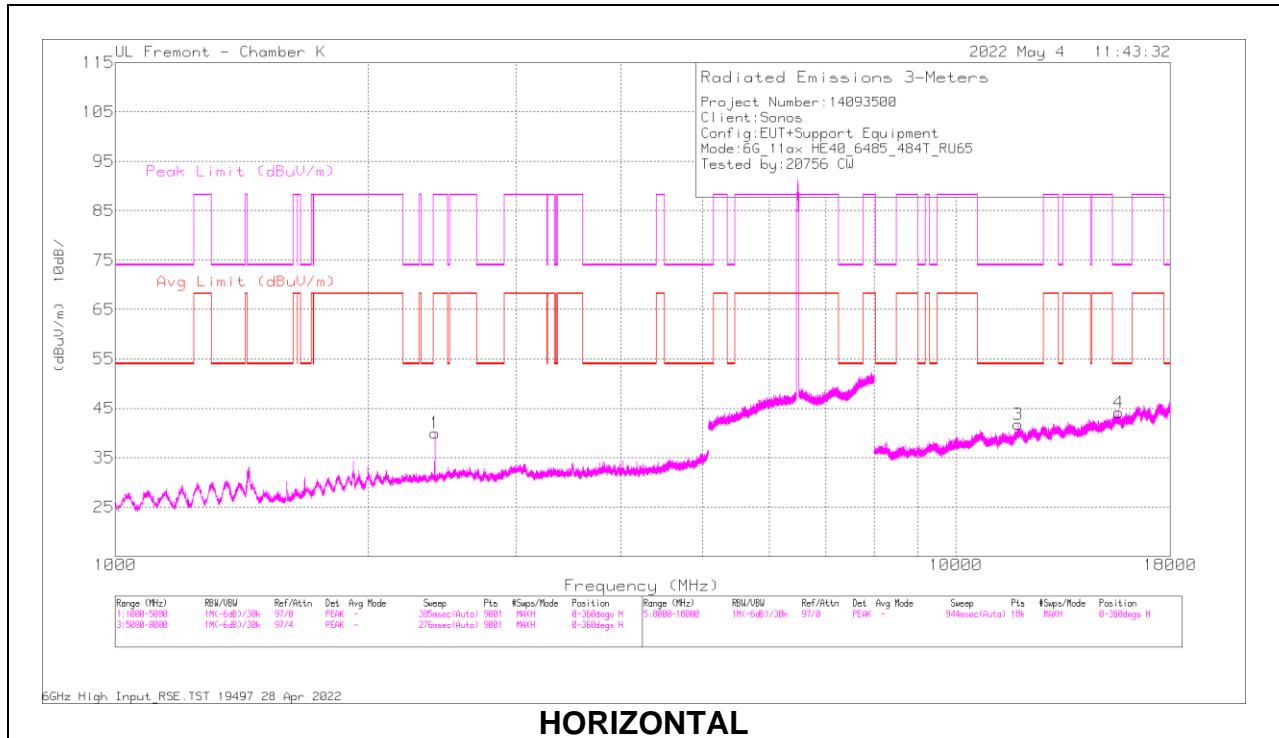

HORIZONTAL

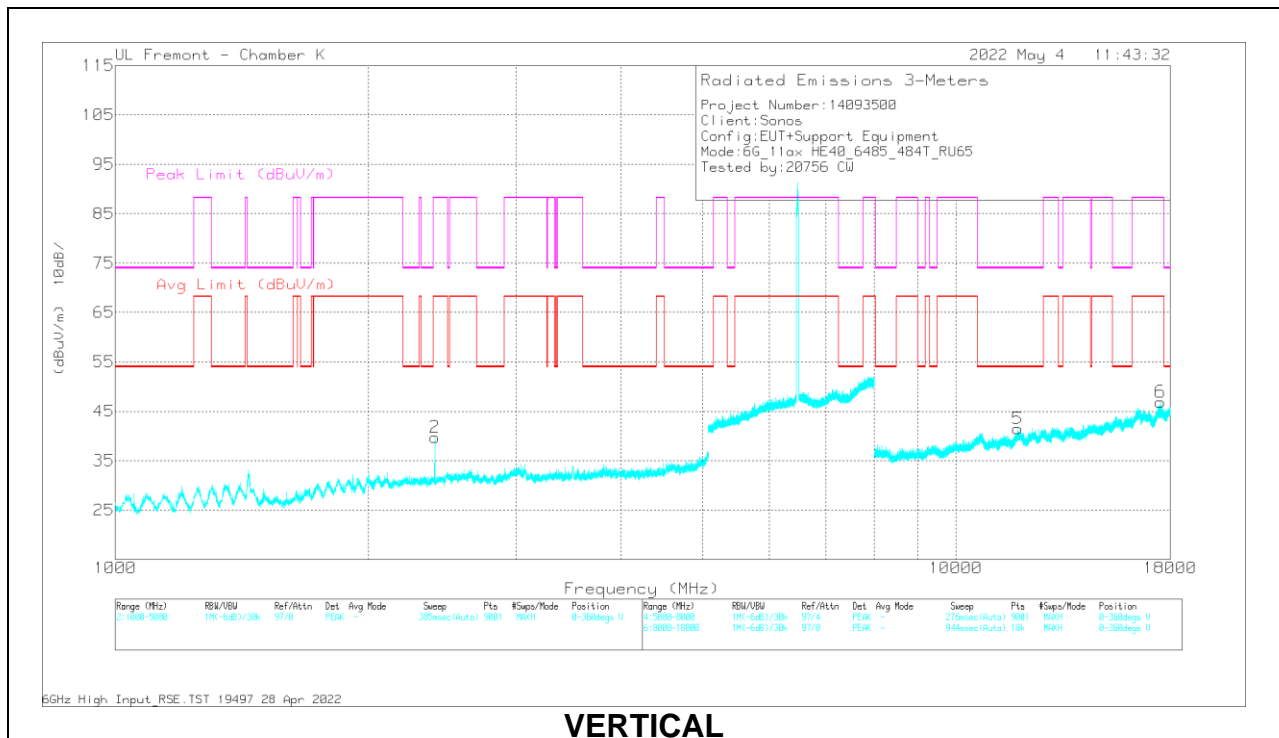

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2399.976	61.41	PK-U	32	-44.2	0	49.21	-	-	88.2	-38.99	293	355	H
	2399.98	53.83	ADR	32	-44.2	2.96	44.59	68.2	-23.61	-	-	293	355	H
2	2400.028	60.6	PK-U	32	-44.2	0	48.4	-	-	88.2	-39.8	199	172	V
	2400.04	53.02	ADR	32	-44.2	2.96	43.78	68.2	-24.42	-	-	199	172	V
3	* 11864.368	45.34	PK-U	38.7	-34	0	50.04	-	-	74	-23.96	192	350	H
	* 11864.06	33.65	ADR	38.7	-34	2.96	41.31	54	-12.69	-	-	192	350	H
4	* 15628.639	44.78	PK-U	40.7	-32.4	0	53.08	-	-	74	-20.92	264	259	H
	* 15628.662	32.94	ADR	40.7	-32.4	2.96	44.2	54	-9.8	-	-	264	259	H
5	* 11853.944	45.53	PK-U	38.7	-34	0	50.23	-	-	74	-23.77	203	156	V
	* 11852.61	33.5	ADR	38.7	-34	2.96	41.16	54	-12.84	-	-	203	156	V
6	17522.369	44.73	PK-U	41.5	-30.2	0	56.03	-	-	88.2	-32.17	146	385	V
	17522.305	32.46	ADR	41.5	-30.2	2.96	46.72	68.2	-21.48	-	-	146	385	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STRADDLE CHANNEL

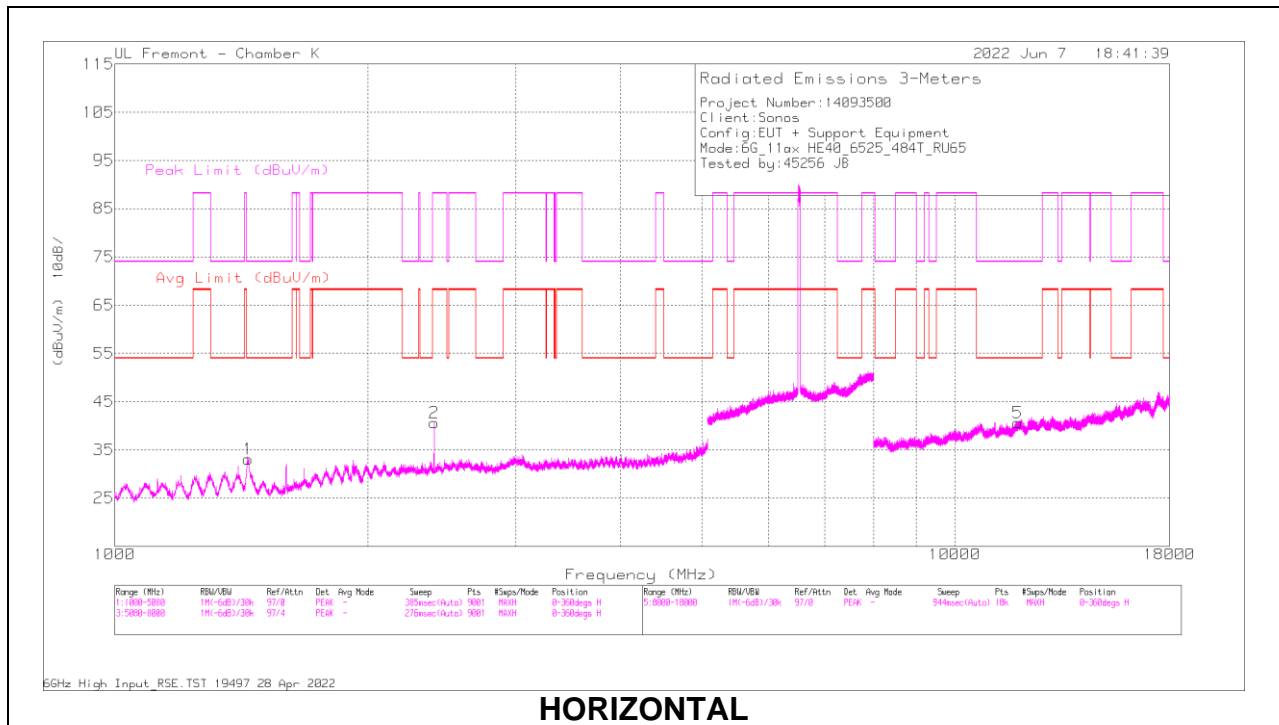

HORIZONTAL

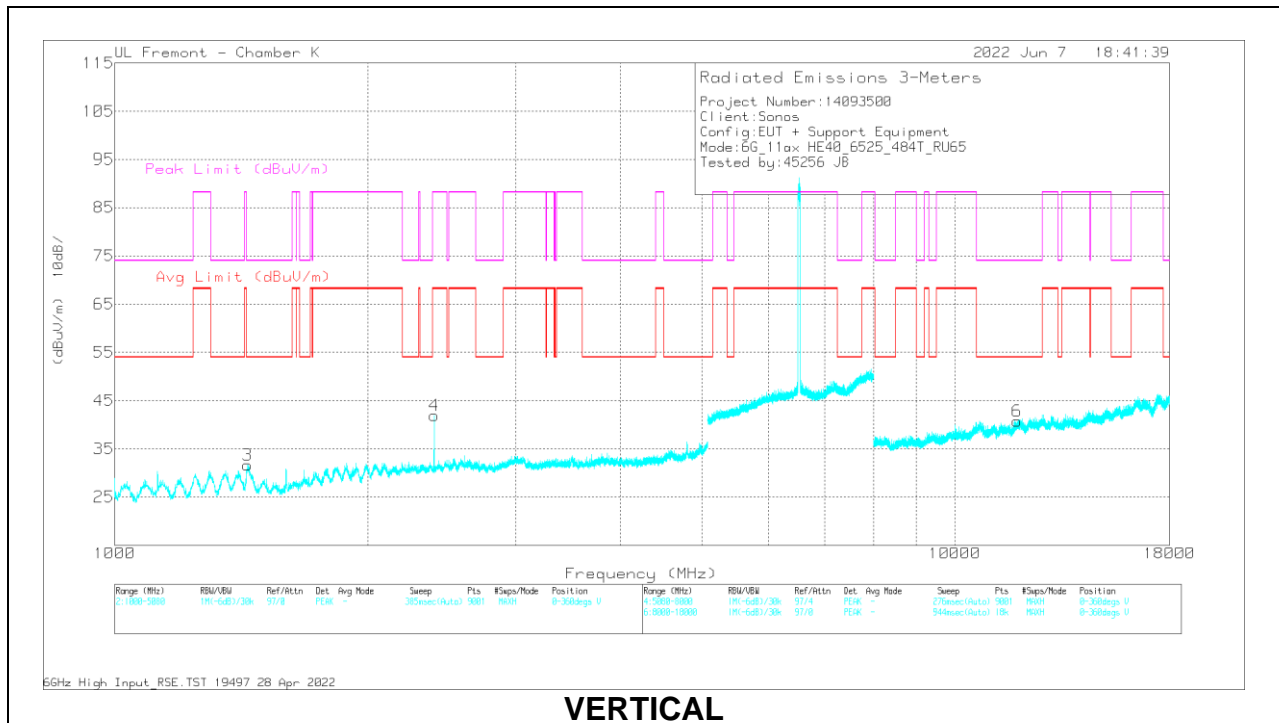

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1440.317	70.39	PK-U	29	-45.9	0	53.49	-	-	74	-20.51	179	184	H
	* 1441.24	49.68	ADR	29	-45.9	2.96	35.74	54	-18.26	-	-	179	184	H
2	2400.076	67.02	PK-U	32	-44.6	0	54.42	-	-	88.2	-33.78	31	204	H
	2400	52.33	ADR	32	-44.6	2.96	42.69	68.2	-25.51	-	-	31	204	H
3	* 1440.474	67.61	PK-U	29	-45.9	0	50.71	-	-	74	-23.29	211	135	V
	* 1439.384	47.55	ADR	29	-46	2.96	33.51	54	-20.49	-	-	211	135	V
4	2399.916	65.6	PK-U	32	-44.6	0	53	-	-	88.2	-35.2	21	124	V
	2400.048	53.21	ADR	32	-44.6	2.96	43.57	68.2	-24.63	-	-	21	124	V
5	* 11874.507	46.05	PK-U	38.7	-34.9	0	49.85	-	-	74	-24.15	84	213	H
	* 11876.409	34.39	ADR	38.7	-34.9	2.96	41.15	54	-12.85	-	-	84	213	H
6	* 11859.236	46.38	PK-U	38.7	-35	0	50.08	-	-	74	-23.92	170	376	V
	* 11859.38	34.64	ADR	38.7	-35	2.96	41.3	54	-12.7	-	-	170	376	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average