


10.1.6. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE UNII-6 BAND


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 0

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL

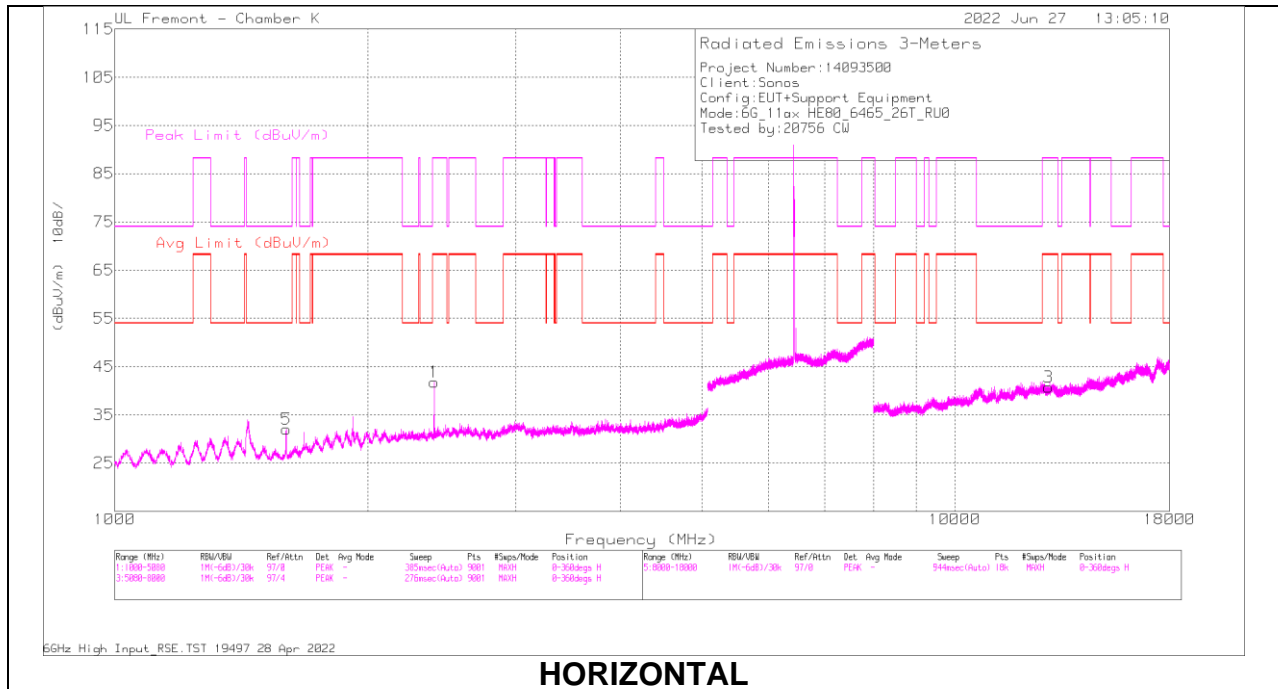

HORIZONTAL

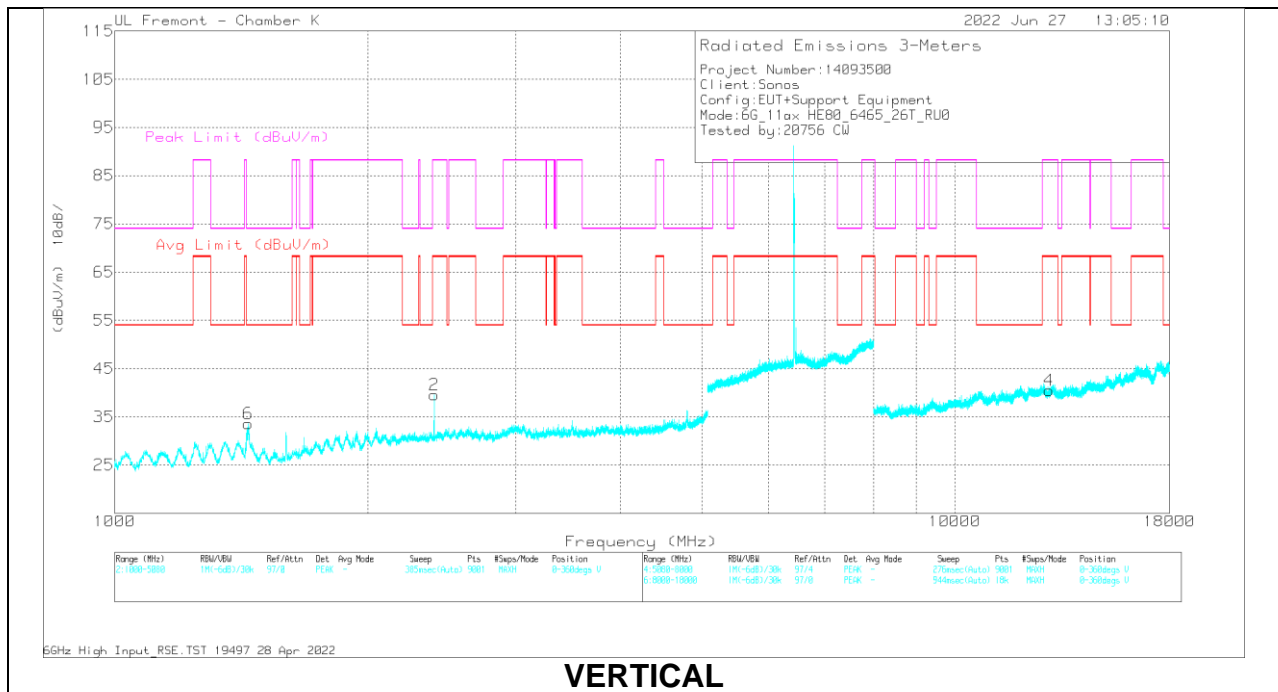

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cbl/Filtr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.044	67.98	PK-U	32	-44.6	0	55.38	-	-	88.2	-32.82	192	255	H
	2400.084	55.93	ADR	32	-44.6	2.01	45.34	68.2	-22.86	-	-	192	255	H
2	* 1599.821	58.36	PK-U	28.1	-45.8	0	40.66	-	-	74	-33.34	243	237	H
	* 1599.777	48.64	ADR	28.1	-45.8	2.01	32.95	54	-21.05	-	-	243	237	H
3	2400.005	61.39	PK-U	32	-44.6	0	48.79	-	-	88.2	-39.41	26	342	V
	2400.055	52.98	ADR	32	-44.6	2.01	42.39	68.2	-25.81	-	-	26	342	V
4	* 1439.884	70.53	PK-U	29	-46	0	53.53	-	-	74	-20.47	218	111	V
	* 1441.81	49.73	ADR	29	-45.9	2.01	34.84	54	-19.16	-	-	218	111	V
5	12922.417	44.79	PK-U	39.3	-34.2	0	49.89	-	-	88.2	-38.31	177	252	H
	12922.643	33.61	ADR	39.3	-34.2	2.01	40.72	68.2	-27.48	-	-	177	252	H
6	12949.528	45.12	PK-U	39.3	-34.1	0	50.32	-	-	88.2	-37.88	248	356	V
	12950.971	33.76	ADR	39.3	-34.1	2.01	40.97	68.2	-27.23	-	-	248	356	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 18

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL

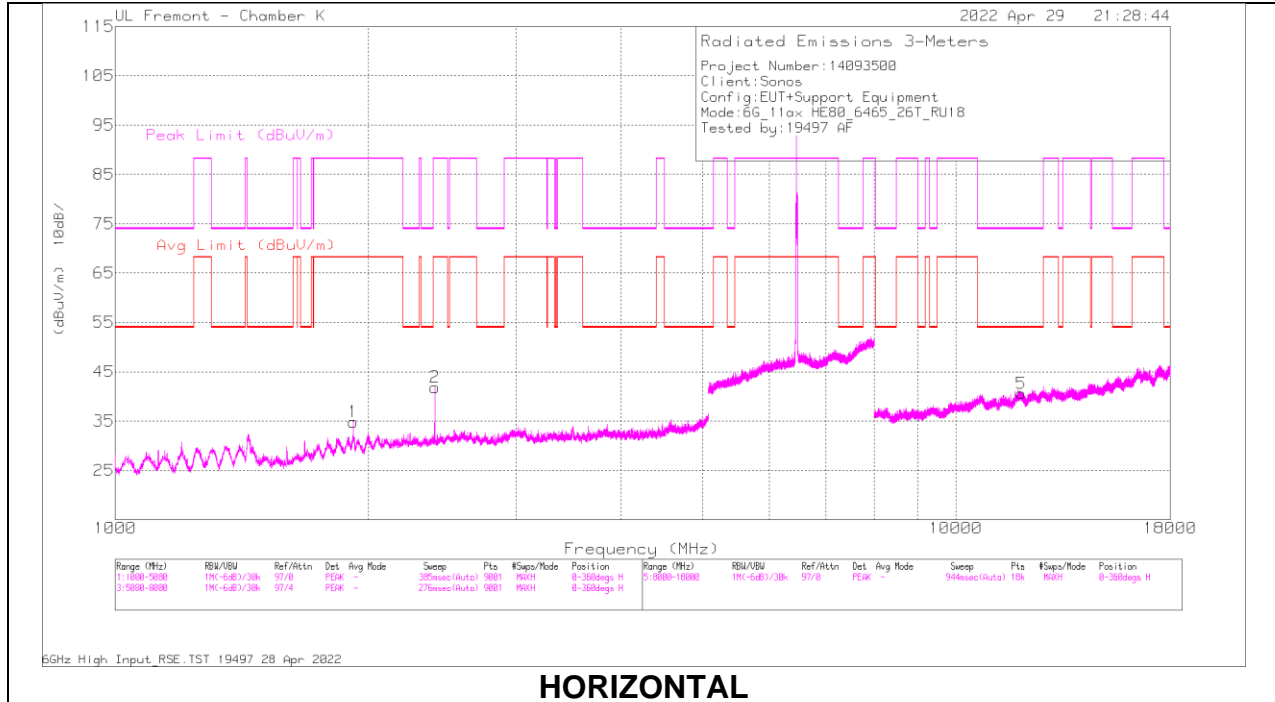

HORIZONTAL

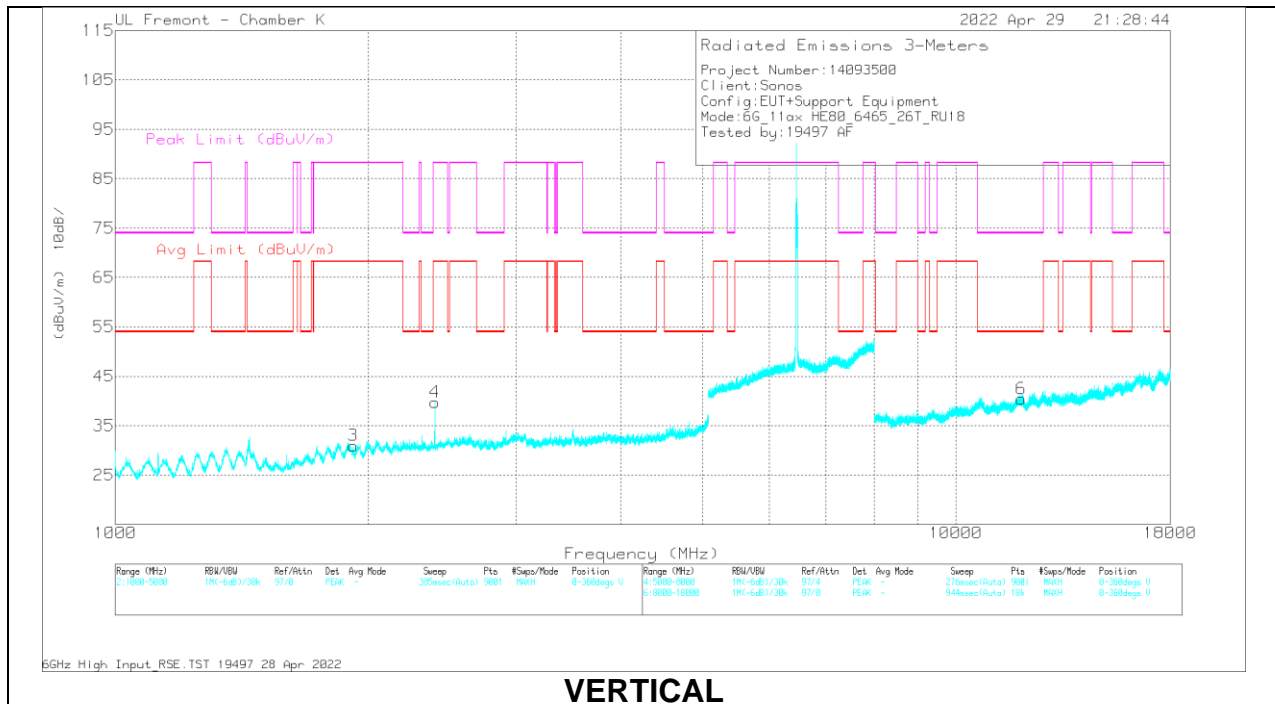

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1919.253	65.99	PK-U	31	-44.9	0	52.09	-	-	88.2	-36.11	219	205	H
	1919.994	48.33	ADR	31	-45	2.01	36.34	68.2	-31.86	-	-	219	205	H
2	2399.852	61.6	PK-U	32	-44.2	0	49.4	-	-	88.2	-38.8	139	211	H
	2400.008	45.79	ADR	32	-44.2	2.01	35.6	68.2	-32.6	-	-	139	211	H
3	1919.453	65.03	PK-U	31	-44.9	0	51.13	-	-	88.2	-37.07	145	206	V
	1920.044	42.84	ADR	31	-45	2.01	30.85	68.2	-37.35	-	-	145	206	V
4	2399.988	58.86	PK-U	32	-44.2	0	46.66	-	-	88.2	-41.54	197	147	V
	2400.044	49.84	ADR	32	-44.2	2.01	39.65	68.2	-28.55	-	-	197	147	V
5	* 11967.991	44.05	PK-U	38.8	-33.4	0	49.45	-	-	74	-24.55	6	152	H
	* 11968.335	32.81	ADR	38.8	-33.4	2.01	40.22	54	-13.78	-	-	6	152	H
6	* 11966.892	44.02	PK-U	38.8	-33.4	0	49.42	-	-	74	-24.58	186	113	V
	* 11968.75	32.54	ADR	38.8	-33.4	2.01	39.95	54	-14.05	-	-	186	113	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 36

HARMONICS AND SPURIOUS EMISSIONS

STRADDLE CHANNEL

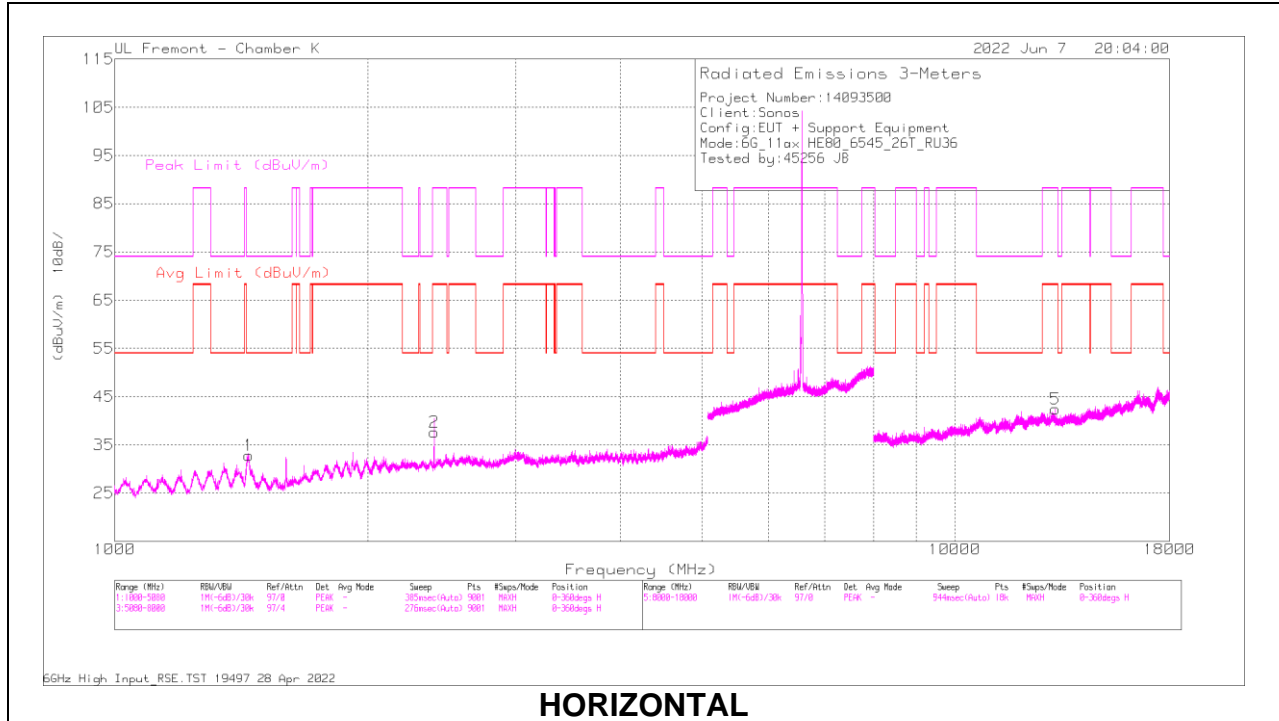

HORIZONTAL

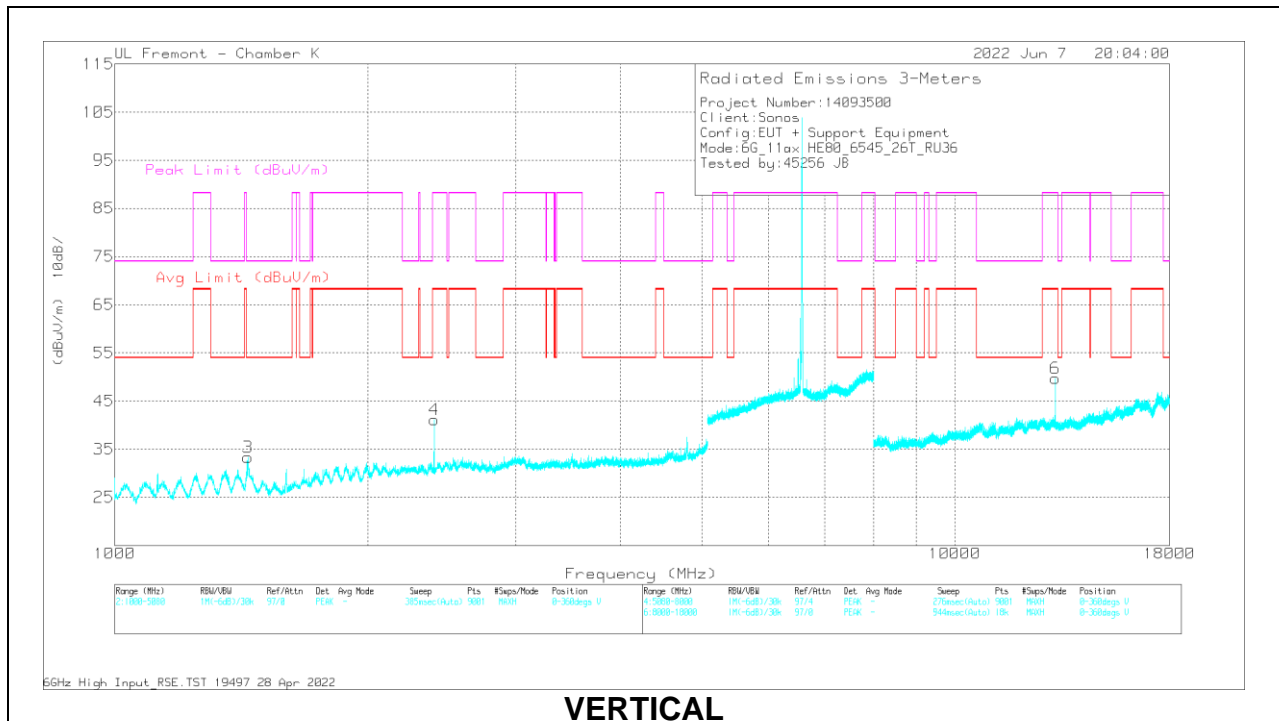

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cbl/Filtr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1443.976	62.94	PK-U	29	-45.9	0	46.04	-	-	74	-27.96	167	134	H
	* 1443.101	48.91	ADR	29	-45.9	2.01	34.02	54	-19.98	-	-	167	134	H
2	2400.258	64.01	PK-U	32	-44.6	0	51.41	-	-	88.2	-36.79	24	106	H
	2400.062	51.82	ADR	32	-44.6	2.01	41.23	68.2	-26.97	-	-	24	106	H
3	* 1440.132	68.29	PK-U	29	-45.9	0	51.39	-	-	74	-22.61	213	134	V
	* 1440.032	48.82	ADR	29	-45.9	2.01	33.93	54	-20.07	-	-	213	134	V
4	2400.264	60.48	PK-U	32	-44.6	0	47.88	-	-	88.2	-40.32	18	97	V
	2400.08	53.29	ADR	32	-44.6	2.01	42.7	68.2	-25.5	-	-	18	97	V
5	13164.92	53.27	PK-U	39.1	-34.4	0	57.97	-	-	88.2	-30.23	71	198	H
	13164.892	37.18	ADR	39.1	-34.4	2.01	43.89	68.2	-24.31	-	-	71	198	H
6	13164.796	59.28	PK-U	39.1	-34.4	0	63.98	-	-	88.2	-24.22	34	197	V
	13164.992	42.54	ADR	39.1	-34.4	2.01	49.25	68.2	-18.95	-	-	34	197	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 996-Tones, RU Index 67

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL

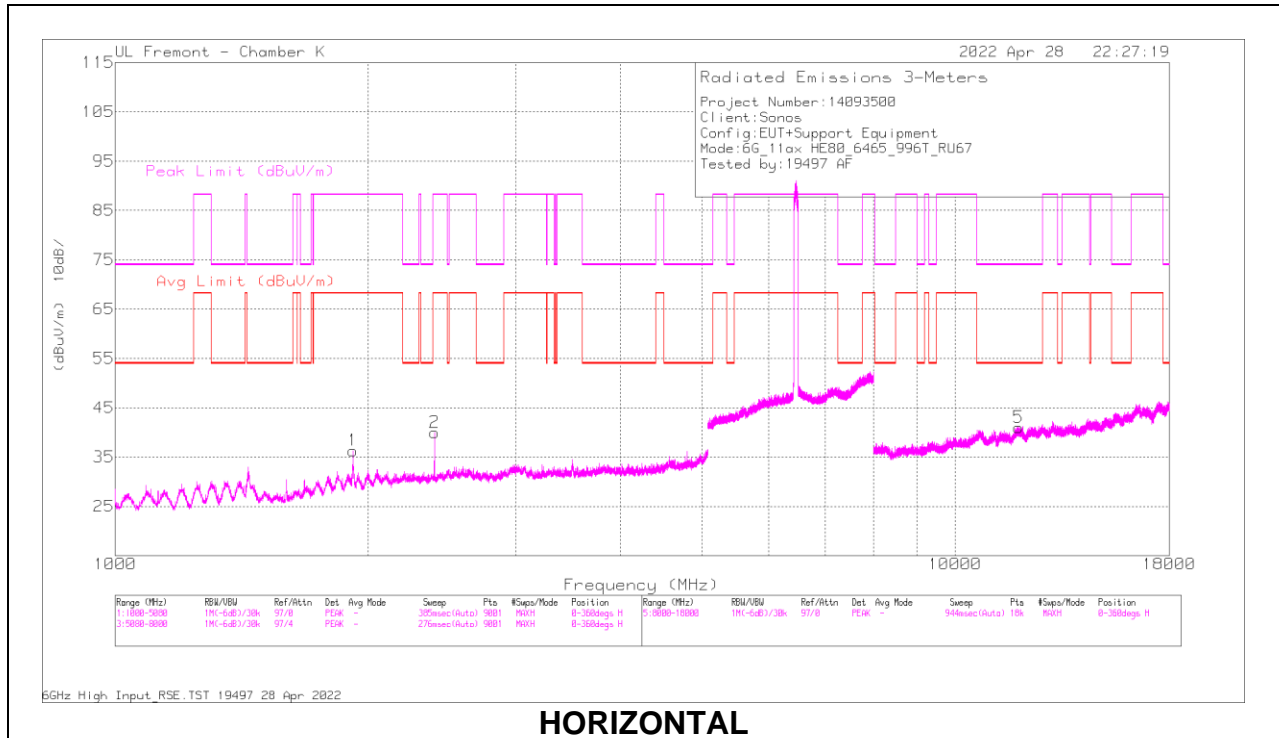

HORIZONTAL

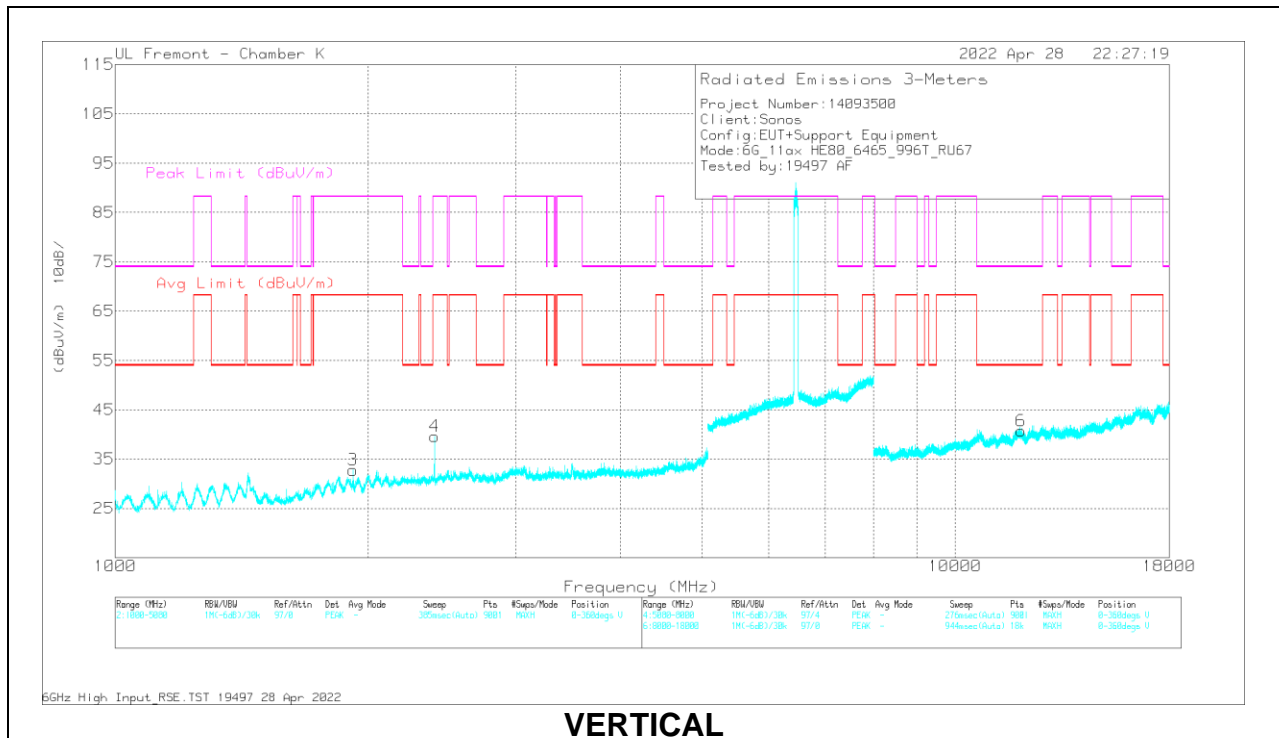

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1920.012	70.81	PK-U	31	-45	0	56.81	-	-	88.2	-31.39	164	257	H
	1919.985	46.56	ADR	31	-45	3.32	35.88	68.2	-32.32	-	-	164	257	H
2	2399.976	61	PK-U	32	-44.2	0	48.8	-	-	88.2	-39.4	136	136	H
	2400.016	49.54	ADR	32	-44.2	3.32	40.66	68.2	-27.54	-	-	136	136	H
3	1920.376	62.08	PK-U	31	-45	0	48.08	-	-	88.2	-40.12	273	192	V
	1920.253	42.49	ADR	31	-45	3.32	31.81	68.2	-36.39	-	-	273	192	V
4	2400.136	59.07	PK-U	32	-44.2	0	46.87	-	-	88.2	-41.33	0	309	V
	2400.073	46.31	ADR	32	-44.2	3.32	37.43	68.2	-30.77	-	-	0	309	V
5	* 11908.15	45.1	PK-U	38.7	-33.7	0	50.1	-	-	74	-23.9	218	316	H
	* 11906.668	33.3	ADR	38.7	-33.7	3.32	41.62	54	-12.38	-	-	218	316	H
6	* 11990.308	44.02	PK-U	38.8	-33.3	0	49.52	-	-	74	-24.48	115	228	V
	* 11991.531	32.64	ADR	38.8	-33.2	3.32	41.56	54	-12.44	-	-	115	228	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STRADDLE CHANNEL

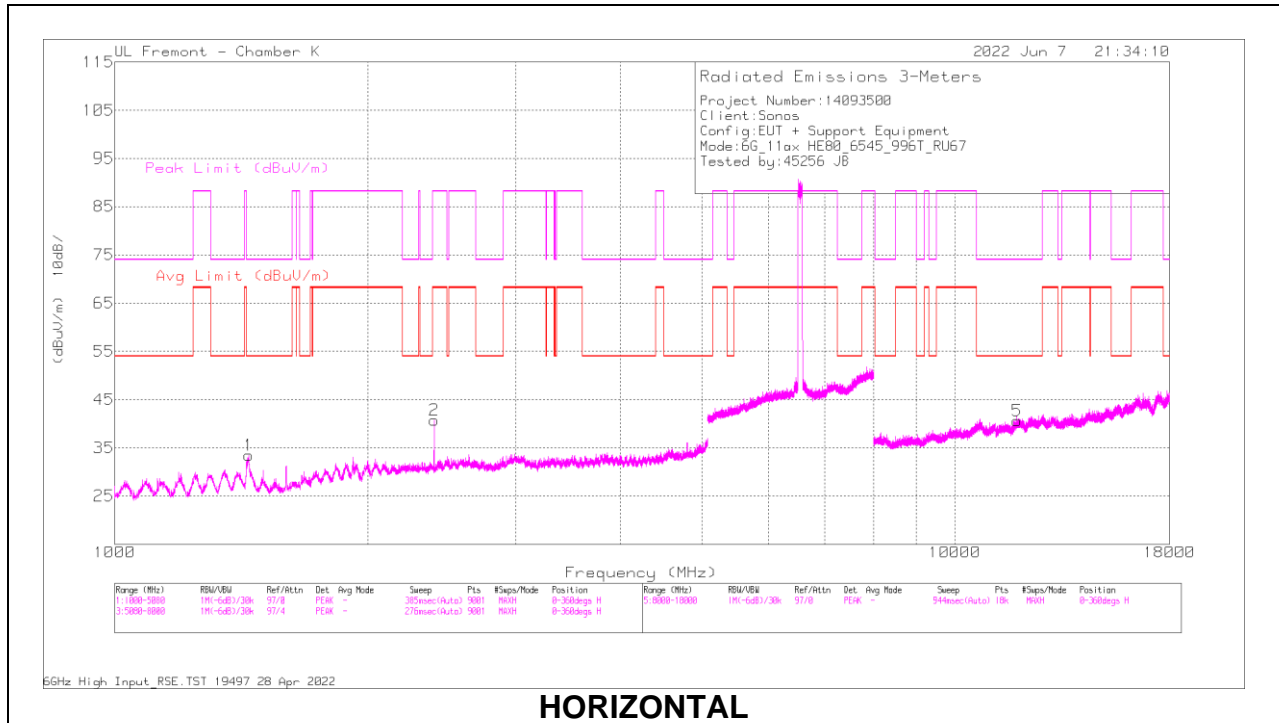

HORIZONTAL

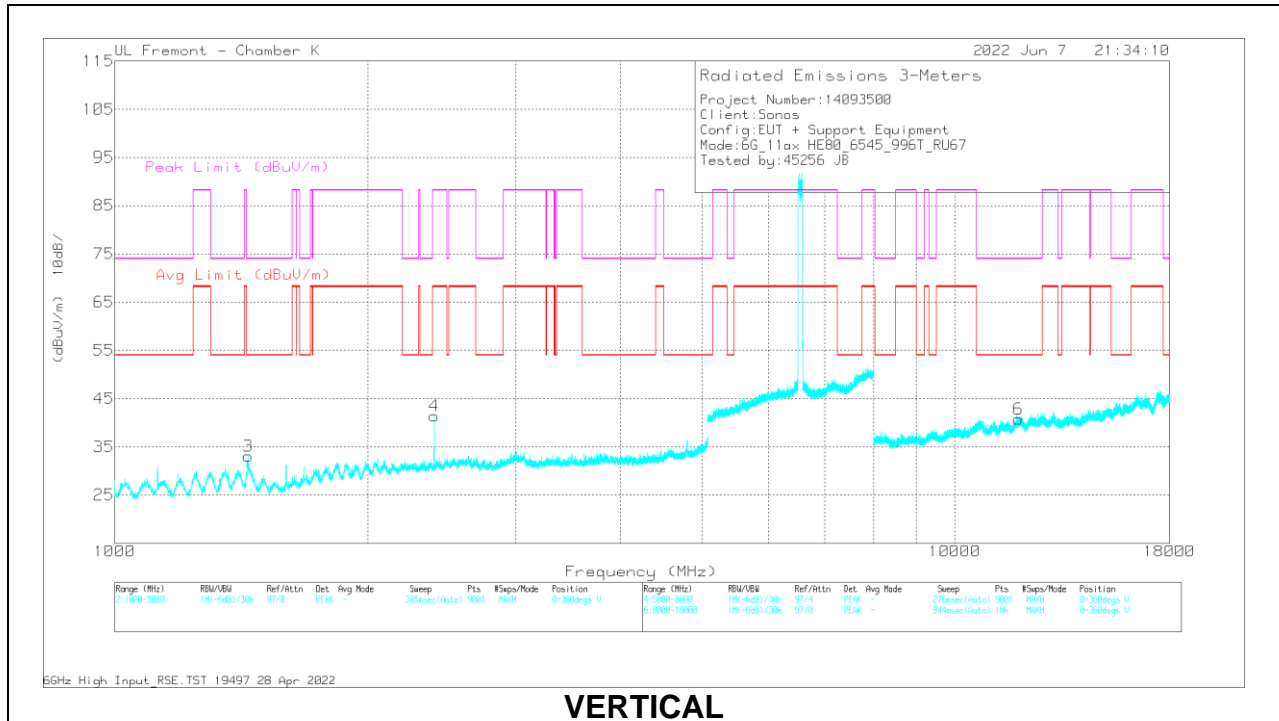

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1442.352	65.34	PK-U	29	-45.9	0	48.44	-	-	74	-25.56	179	189	H
	* 1442.8	49.69	ADR	29	-45.9	3.32	36.11	54	-17.89	-	-	179	189	H
2	2400.132	58.7	PK-U	32	-44.6	0	46.1	-	-	88.2	-42.1	50	110	H
	2400.052	51.67	ADR	32	-44.6	3.32	42.39	68.2	-25.81	-	-	50	110	H
3	* 1440.577	70.46	PK-U	29	-45.9	0	53.56	-	-	74	-20.44	220	131	V
	* 1440.293	48.47	ADR	29	-45.9	3.32	34.89	54	-19.11	-	-	220	131	V
4	2399.894	59.58	PK-U	32	-44.6	0	46.98	-	-	88.2	-41.22	10	141	V
	2400.01	51.8	ADR	32	-44.6	3.32	42.52	68.2	-25.68	-	-	10	141	V
5	* 11850.623	46.39	PK-U	38.7	-35	0	50.09	-	-	74	-23.91	29	214	H
	* 11851.678	34.32	ADR	38.7	-35.1	3.32	41.24	54	-12.76	-	-	29	214	H
6	* 11905.145	46.73	PK-U	38.7	-34.8	0	50.63	-	-	74	-23.37	64	190	V
	* 11905.197	34.48	ADR	38.7	-34.8	3.32	41.7	54	-12.3	-	-	64	190	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.7. TX ABOVE 1 GHz 802.11ax HE20 MODE IN THE UNII-7 BAND


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 0

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

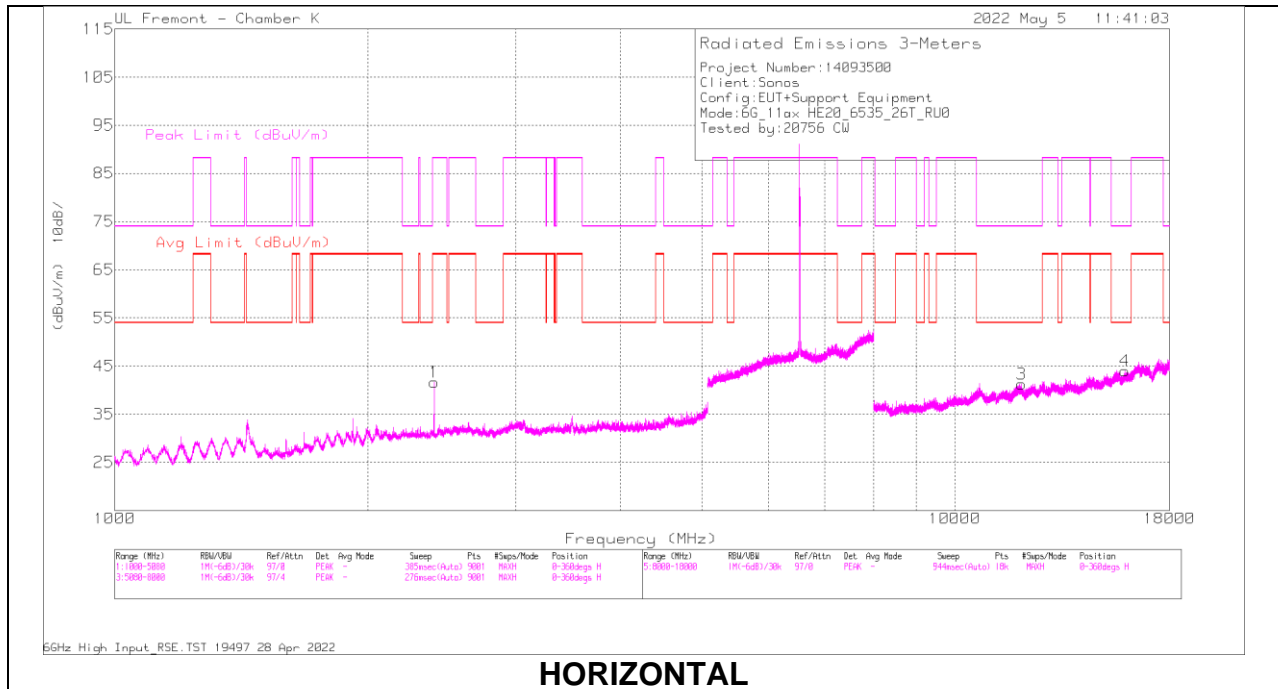

HORIZONTAL

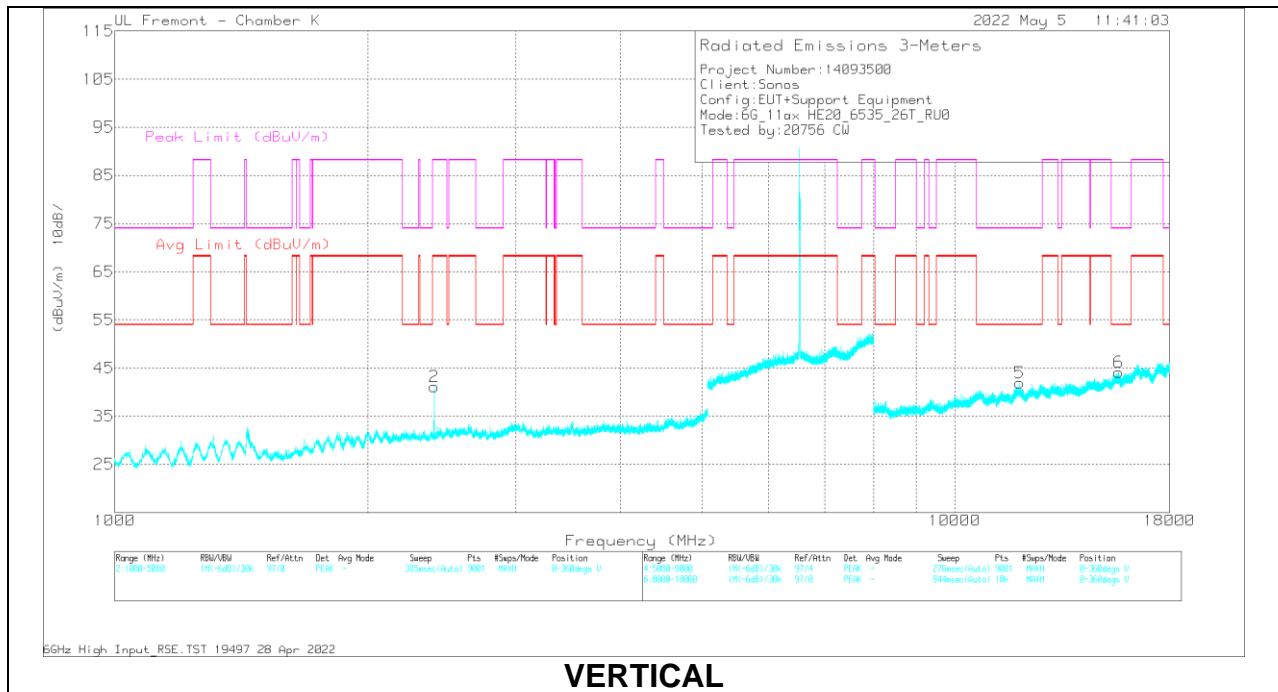

VERTICAL

RADIATED EMISSIONS

Markers	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.024	61.83	PK-U	32	-44.2	0	49.63	-	-	88.2	-38.57	143	259	H
	2400.044	54.33	ADR	32	-44.2	2.02	44.15	68.2	-24.05	-	-	143	259	H
2	2400.004	60.74	PK-U	32	-44.2	0	48.54	-	-	88.2	-39.66	200	201	V
	2400.002	53.14	ADR	32	-44.2	2.02	42.96	68.2	-25.24	-	-	200	201	V
3	* 11998.457	43.74	PK-U	38.8	-33	0	49.54	-	-	74	-24.46	176	224	H
	* 12000.303	32.45	ADR	38.8	-33	2.02	40.27	54	-13.73	-	-	176	224	H
4	* 15945.806	44.47	PK-U	40.6	-32.2	0	52.87	-	-	74	-21.13	349	212	H
	* 15945.588	32.61	ADR	40.6	-32.2	2.02	43.03	54	-10.97	-	-	349	212	H
5	* 11943.696	44.83	PK-U	38.7	-33.4	0	50.13	-	-	74	-23.87	234	188	V
	* 11943.988	33.02	ADR	38.7	-33.4	2.02	40.34	54	-13.66	-	-	234	188	V
6	* 15651.347	44.94	PK-U	40.6	-32.5	0	53.04	-	-	74	-20.96	341	174	V
	* 15651.188	32.89	ADR	40.6	-32.5	2.02	43.01	54	-10.99	-	-	341	174	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 4

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL

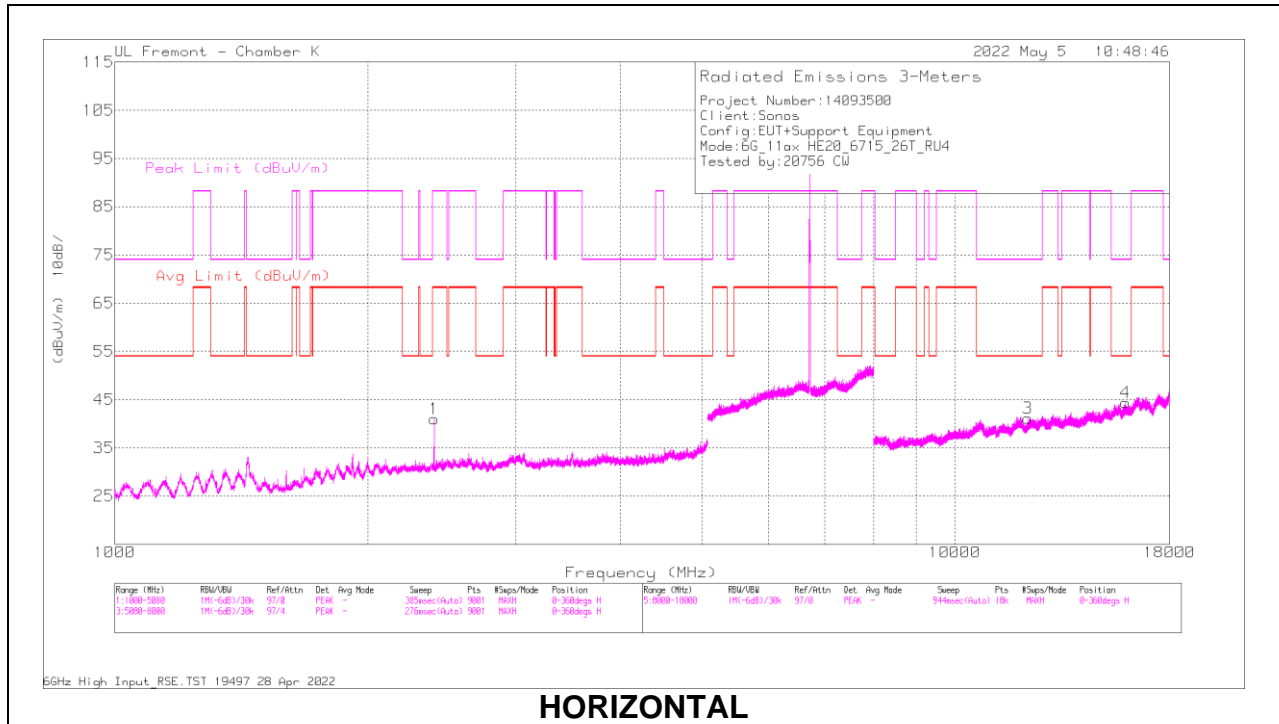

HORIZONTAL

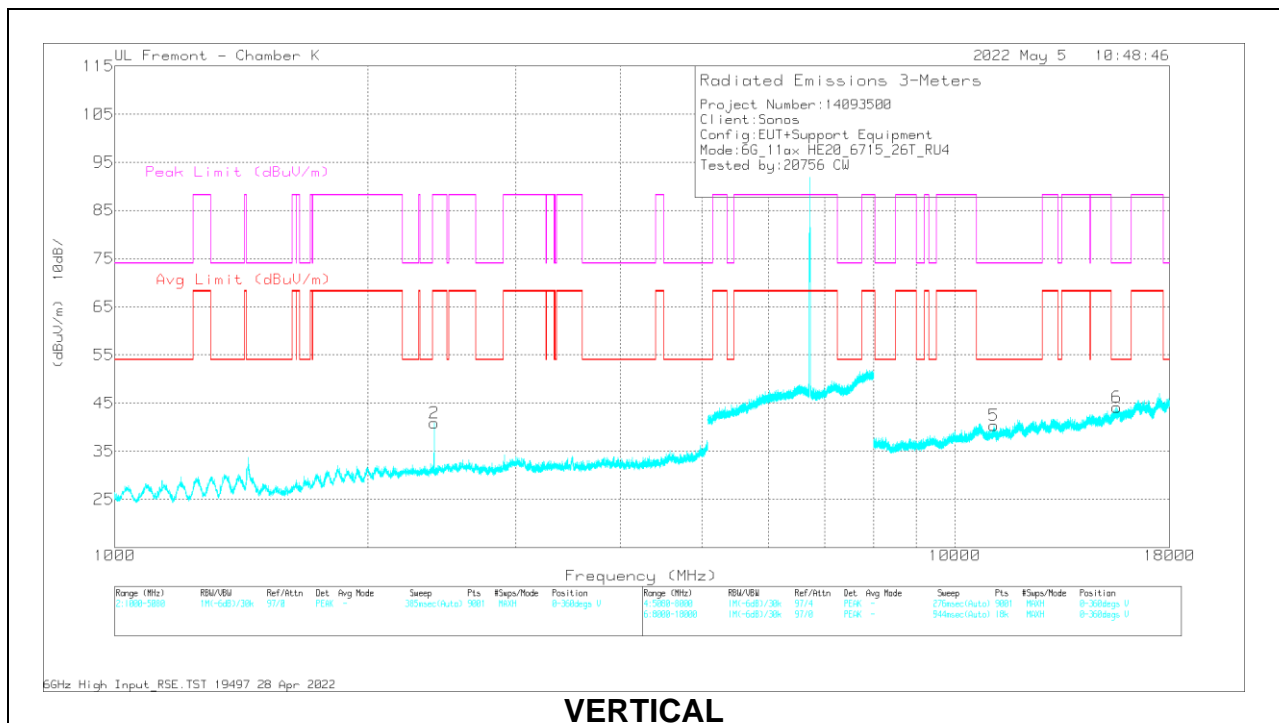

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2399.976	63.55	PK-U	32	-44.2	0	51.35	-	-	88.2	-36.85	147	231	H
	2400.004	55.41	ADR	32	-44.2	2.02	45.23	68.2	-22.97	-	-	147	231	H
2	2400.164	60.64	PK-U	32	-44.2	0	48.44	-	-	88.2	-39.76	197	203	V
	2400.072	53.3	ADR	32	-44.2	2.02	43.12	68.2	-25.08	-	-	197	203	V
3	* 12201.503	43.78	PK-U	39	-33.6	0	49.18	-	-	74	-24.82	223	277	H
	* 12202.167	31.9	ADR	39	-33.6	2.02	39.32	54	-14.68	-	-	223	277	H
4	* 15950.194	43.84	PK-U	40.6	-32.2	0	52.24	-	-	74	-21.76	162	374	H
	* 15949.951	32.56	ADR	40.6	-32.2	2.02	42.98	54	-11.02	-	-	162	374	H
5	* 11130.012	46.7	PK-U	38	-35	0	49.7	-	-	74	-24.3	113	336	V
	* 11130.971	34.69	ADR	38	-35	2.02	39.71	54	-14.29	-	-	113	336	V
6	* 15581.34	44.67	PK-U	40.7	-32.4	0	52.97	-	-	74	-21.03	121	277	V
	* 15581.35	32.86	ADR	40.7	-32.4	2.02	43.18	54	-10.82	-	-	121	277	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 8

HARMONICS AND SPURIOUS EMISSIONS

HIGH CHANNEL

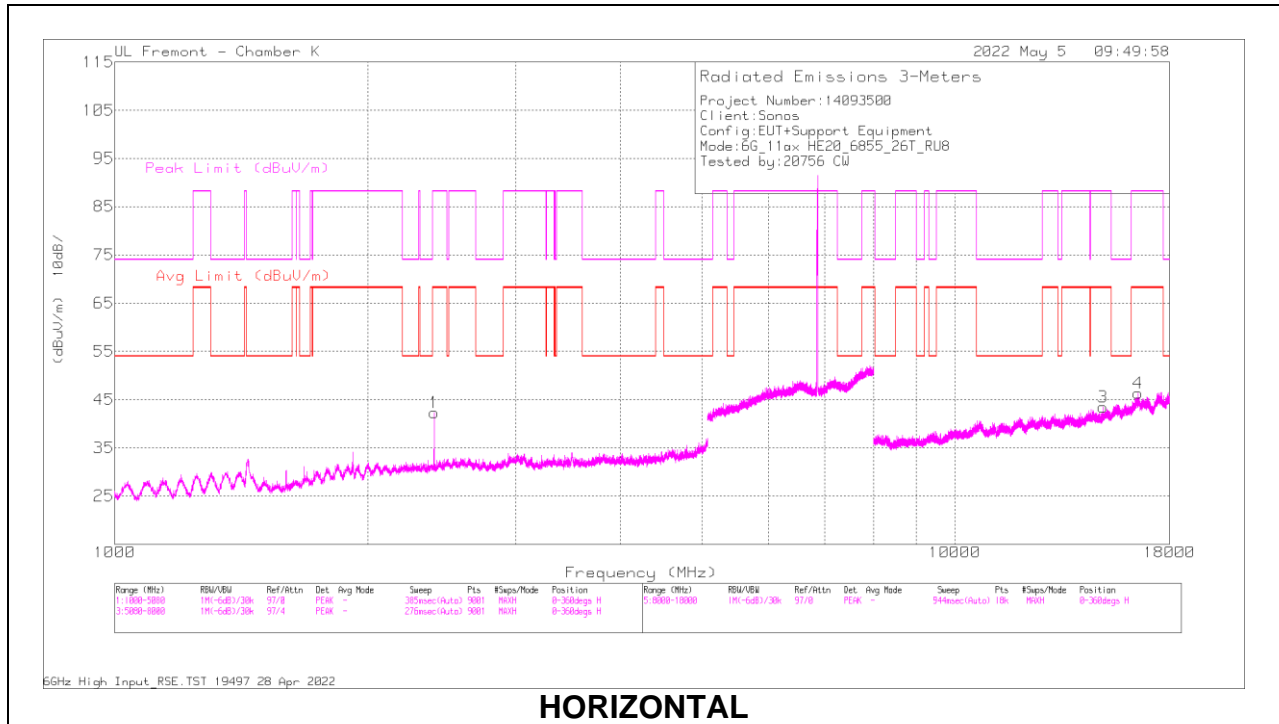

HORIZONTAL

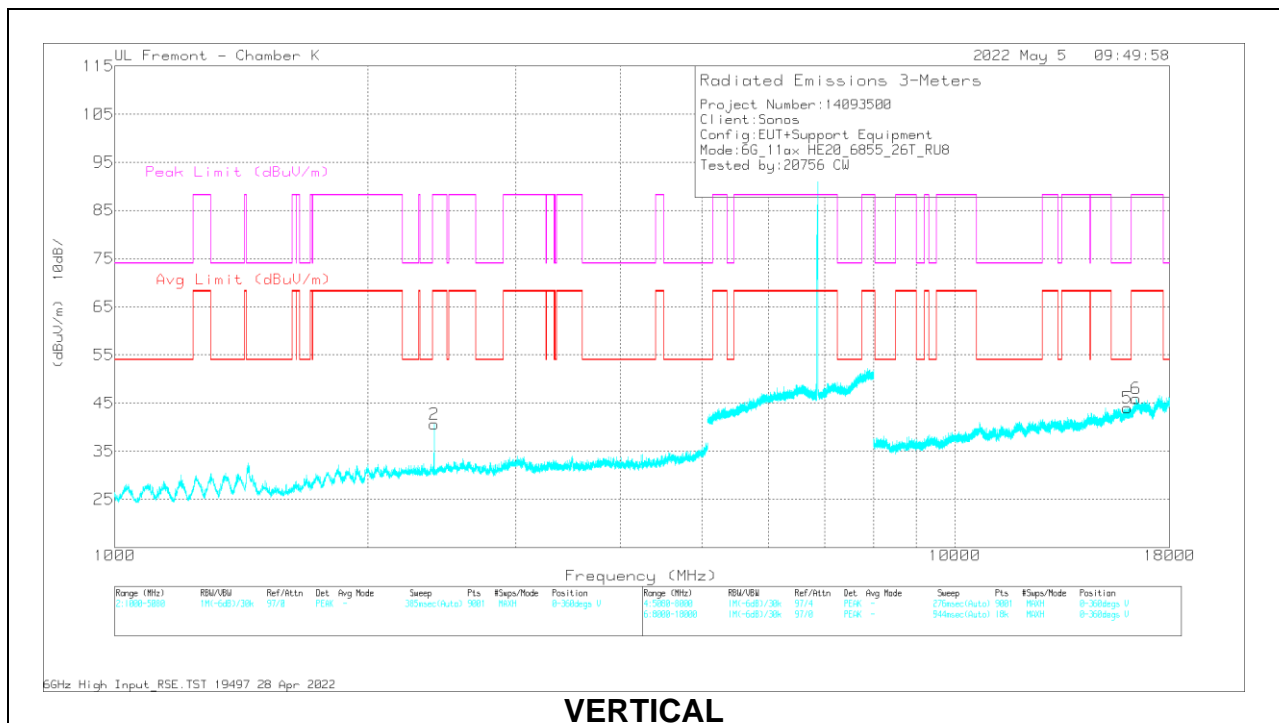

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.5	65.5	PK-U	32	-44.2	0	53.3	-	-	88.2	-34.9	144	229	H
	2399.988	54.78	ADR	32	-44.2	2.02	44.6	68.2	-23.6	-	-	144	229	H
2	2399.812	60.35	PK-U	32	-44.2	0	48.15	-	-	88.2	-40.05	201	202	V
	2400.012	52.99	ADR	32	-44.2	2.02	42.81	68.2	-25.39	-	-	201	202	V
3	15011.9	44.7	PK-U	39.7	-33.3	0	51.1	-	-	88.2	-37.1	185	392	H
	15010.909	32.95	ADR	39.7	-33.3	2.02	41.37	68.2	-26.83	-	-	185	392	H
4	16529.113	45.14	PK-U	41.7	-31.9	0	54.94	-	-	88.2	-33.26	353	277	H
	16529.104	33.33	ADR	41.7	-31.9	2.02	45.15	68.2	-23.05	-	-	353	277	H
5	* 16041.79	44.73	PK-U	40.8	-32.3	0	53.23	-	-	74	-20.77	209	126	V
	* 16041.881	32.63	ADR	40.8	-32.3	2.02	43.15	54	-10.85	-	-	209	126	V
6	16424.093	44.75	PK-U	41.6	-32.1	0	54.25	-	-	88.2	-33.95	346	218	V
	16423.95	32.9	ADR	41.6	-32.1	2.02	44.42	68.2	-23.78	-	-	346	218	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STRADDLE CHANNEL

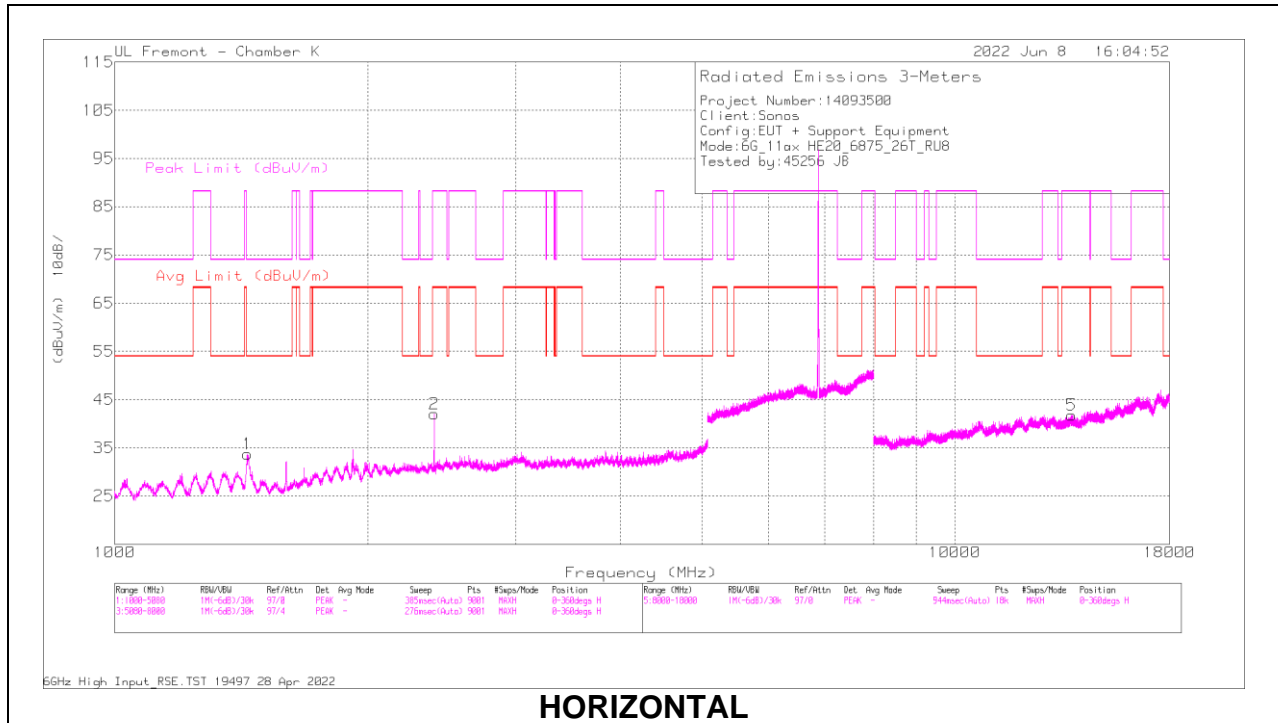

HORIZONTAL

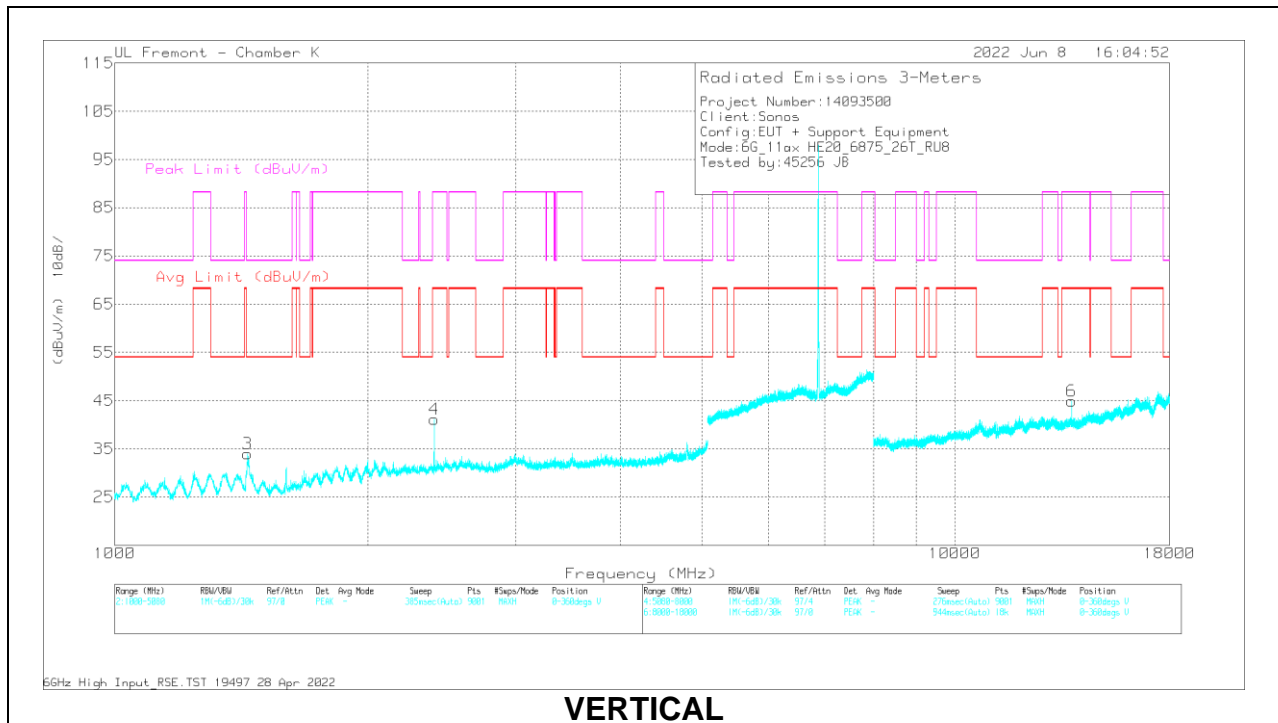

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1439.951	73.61	PK-U	29	-46	0	56.61	-	-	74	-17.39	163	278	H
	* 1439.995	52.81	ADR	29	-46	2.02	37.83	54	-16.17	-	-	163	278	H
2	2399.908	65.06	PK-U	32	-44.6	0	52.46	-	-	88.2	-35.74	249	198	H
	2400.004	53.7	ADR	32	-44.6	2.02	43.12	68.2	-25.08	-	-	249	198	H
3	* 1440.234	77	PK-U	29	-45.9	0	60.1	-	-	74	-13.9	217	138	V
	* 1440.758	49.69	ADR	29	-45.9	2.02	34.81	54	-19.19	-	-	217	138	V
4	2399.952	61.97	PK-U	32	-44.6	0	49.37	-	-	88.2	-38.83	201	149	V
	2399.984	53.93	ADR	32	-44.6	2.02	43.35	68.2	-24.85	-	-	201	149	V
5	13765.498	45.99	PK-U	38.6	-34.5	0	50.09	-	-	88.2	-38.11	339	321	H
	13765.638	34.27	ADR	38.6	-34.5	2.02	40.39	68.2	-27.81	-	-	339	321	H
6	13767.069	56.41	PK-U	38.6	-34.4	0	60.61	-	-	88.2	-27.59	23	180	V
	13767.033	39.8	ADR	38.6	-34.4	2.02	46.02	68.2	-22.18	-	-	23	180	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 242-Tones, RU Index 61

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

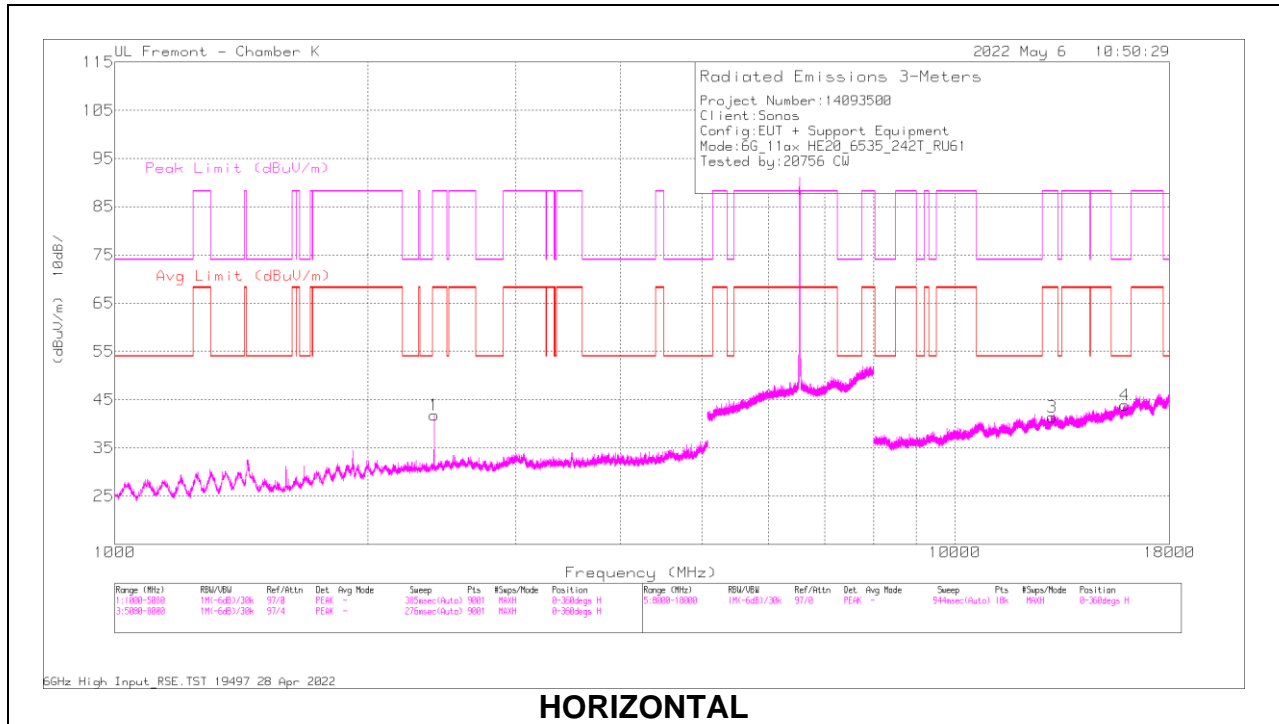

HORIZONTAL

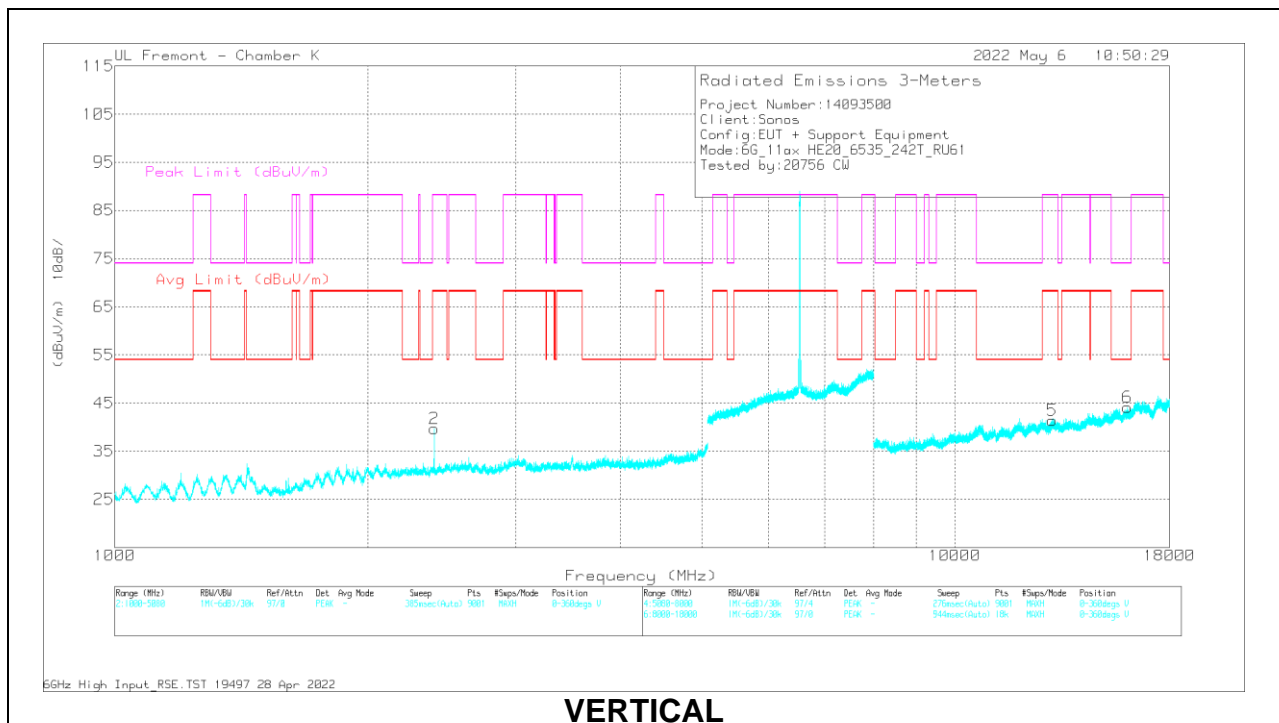

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.148	61.19	PK-U	32	-44.2	0	48.99	-	-	88.2	-39.21	142	203	H
	2400.06	53.93	ADR	32	-44.2	2.92	44.65	68.2	-23.55	-	-	142	203	H
2	2400.092	59.69	PK-U	32	-44.2	0	47.49	-	-	88.2	-40.71	332	105	V
	2400.072	51.24	ADR	32	-44.2	2.92	41.96	68.2	-26.24	-	-	332	105	V
3	13064.366	44.36	PK-U	39.3	-33	0	50.66	-	-	88.2	-37.54	3	327	H
	13067.755	32.8	ADR	39.2	-32.9	2.92	42.02	68.2	-26.18	-	-	3	327	H
4	* 15924.188	44.49	PK-U	40.6	-32	0	53.09	-	-	74	-20.91	291	374	H
	* 15923.833	32.29	ADR	40.5	-32	2.92	43.71	54	-10.29	-	-	291	374	H
5	13062.439	44.34	PK-U	39.3	-33	0	50.64	-	-	88.2	-37.56	323	266	V
	13060.765	32.88	ADR	39.2	-33.1	2.92	41.9	68.2	-26.3	-	-	323	266	V
6	* 16038.014	44.41	PK-U	40.8	-32.3	0	52.91	-	-	74	-21.09	229	159	V
	* 16038.061	32.52	ADR	40.8	-32.3	2.92	43.94	54	-10.06	-	-	229	159	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL

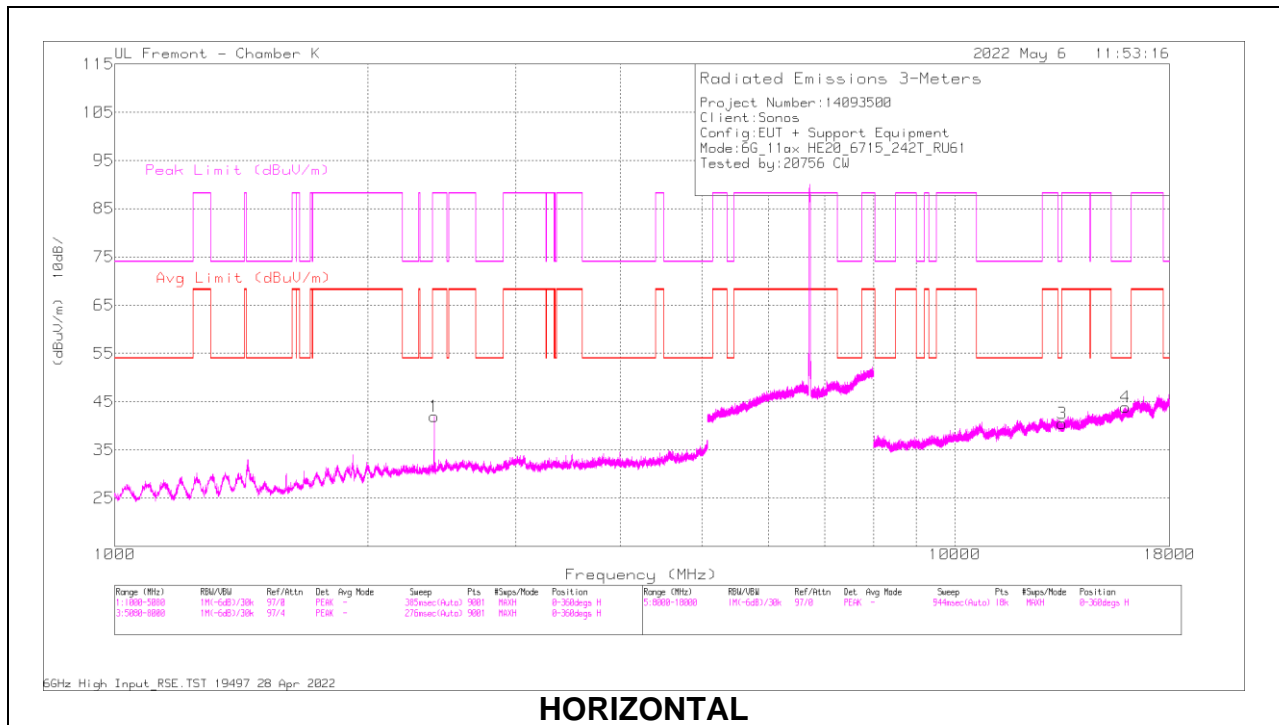

HORIZONTAL

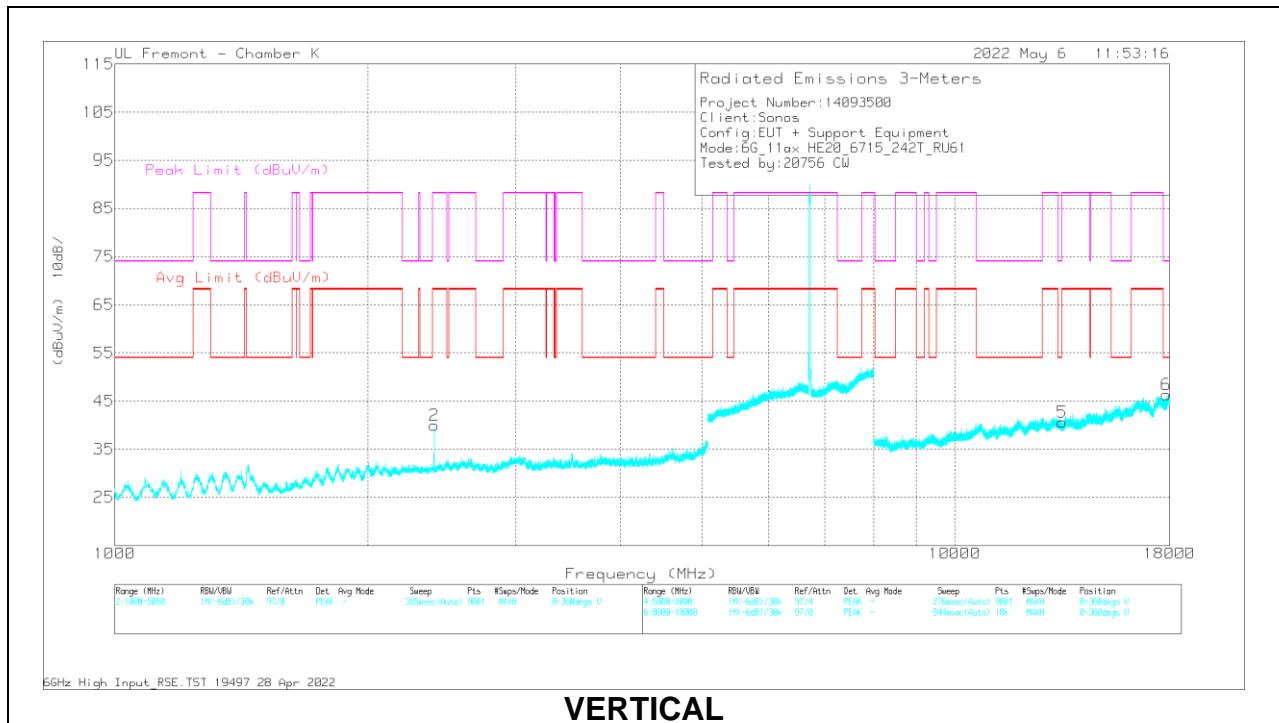

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.04	61.32	PK-U	32	-44.2	0	49.12	-	-	88.2	-39.08	141	201	H
	2400.032	54.01	ADR	32	-44.2	2.92	44.73	68.2	-23.47	-	-	141	201	H
2	2400.148	58.57	PK-U	32	-44.2	0	46.37	-	-	88.2	-41.83	328	101	V
	2400.076	51.12	ADR	32	-44.2	2.92	41.84	68.2	-26.36	-	-	328	101	V
3	13423.475	44.4	PK-U	39.1	-33.5	0	50	-	-	88.2	-38.2	54	374	H
	13423.383	32.62	ADR	39.1	-33.5	2.92	41.14	68.2	-27.06	-	-	54	374	H
4	* 15969.531	44.64	PK-U	40.6	-32.3	0	52.94	-	-	74	-21.06	354	235	H
	* 15969.712	32.83	ADR	40.7	-32.3	2.92	44.15	54	-9.85	-	-	354	235	H
5	13410.29	44.14	PK-U	39.2	-33.3	0	50.04	-	-	88.2	-38.16	42	111	V
	13409.71	32.26	ADR	39.2	-33.3	2.92	41.08	68.2	-27.12	-	-	42	111	V
6	* 17856.129	42.8	PK-U	41.8	-30	0	54.6	-	-	74	-19.4	281	205	V
	* 17856.177	31.38	ADR	41.8	-30	2.92	46.1	54	-7.9	-	-	281	205	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL

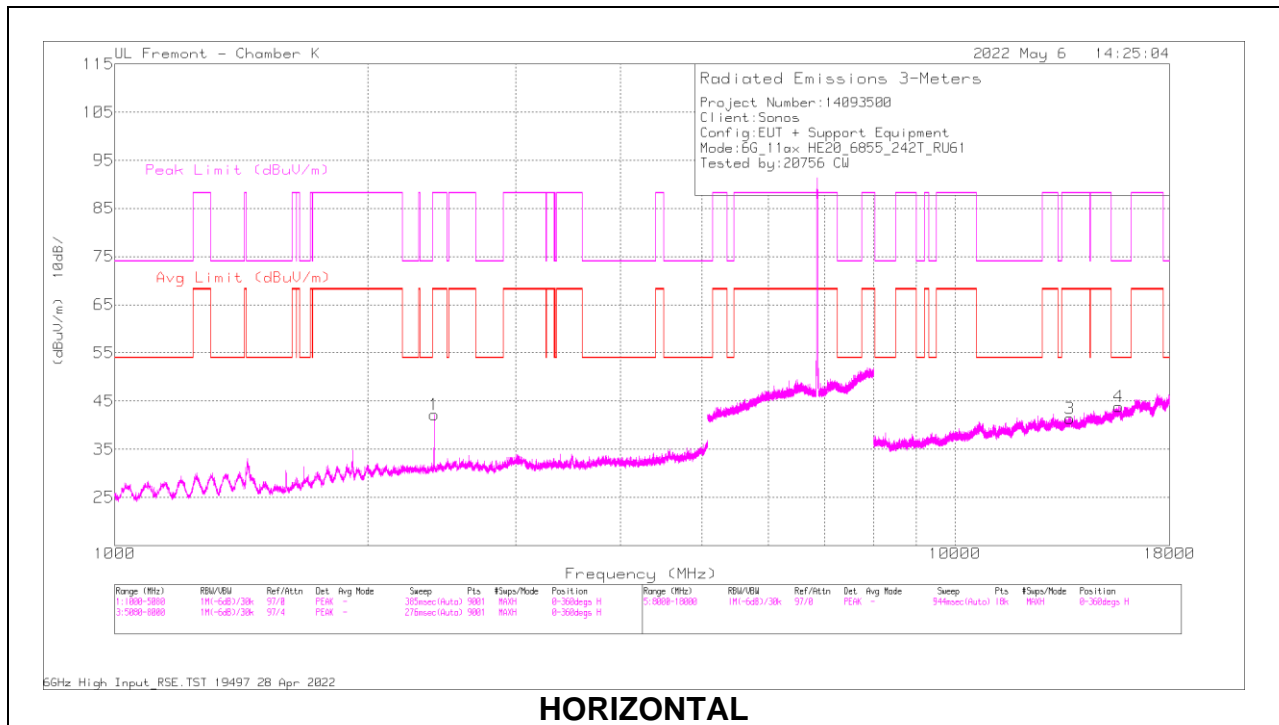

HORIZONTAL

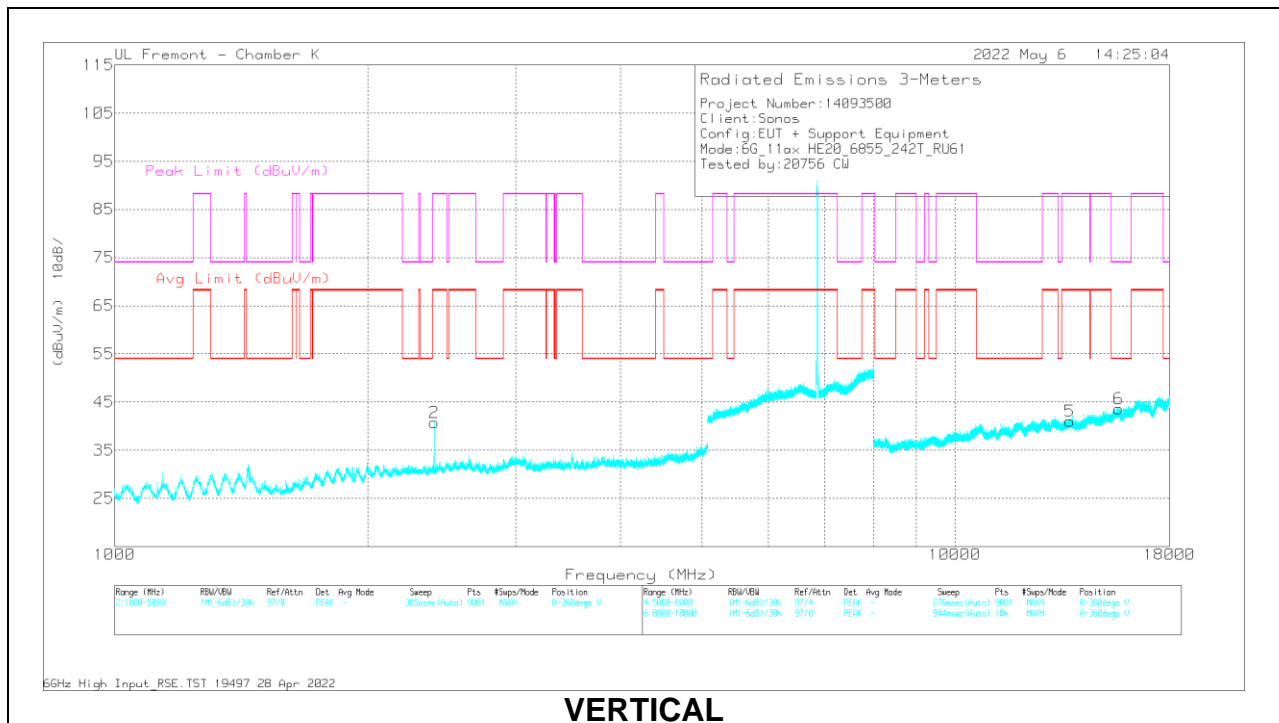

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2399.828	60.7	PK-U	32	-44.2	0	48.5	-	-	88.2	-39.7	142	264	H
	2400.064	53.65	ADR	32	-44.2	2.92	44.37	68.2	-23.83	-	-	142	264	H
2	2399.924	59.25	PK-U	32	-44.2	0	47.05	-	-	88.2	-41.15	332	99	V
	2399.948	51.57	ADR	32	-44.2	2.92	42.29	68.2	-25.91	-	-	332	99	V
3	13703.963	45.13	PK-U	38.7	-33.1	0	50.73	-	-	88.2	-37.47	195	183	H
	13703.432	33.05	ADR	38.6	-33.1	2.92	41.47	68.2	-26.73	-	-	195	183	H
4	* 15673.064	44.04	PK-U	40.6	-32.3	0	52.34	-	-	74	-21.66	191	129	H
	* 15672.924	32.53	ADR	40.6	-32.3	2.92	43.75	54	-10.25	-	-	191	129	H
5	13691.138	44.87	PK-U	38.6	-33.4	0	50.07	-	-	88.2	-38.13	323	168	V
	13689.459	32.93	ADR	38.6	-33.4	2.92	41.05	68.2	-27.15	-	-	323	168	V
6	* 15662.556	45.76	PK-U	40.6	-32.5	0	53.86	-	-	74	-20.14	317	238	V
	* 15662.355	32.8	ADR	40.6	-32.5	2.92	43.82	54	-10.18	-	-	317	238	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STRADDLE CHANNEL

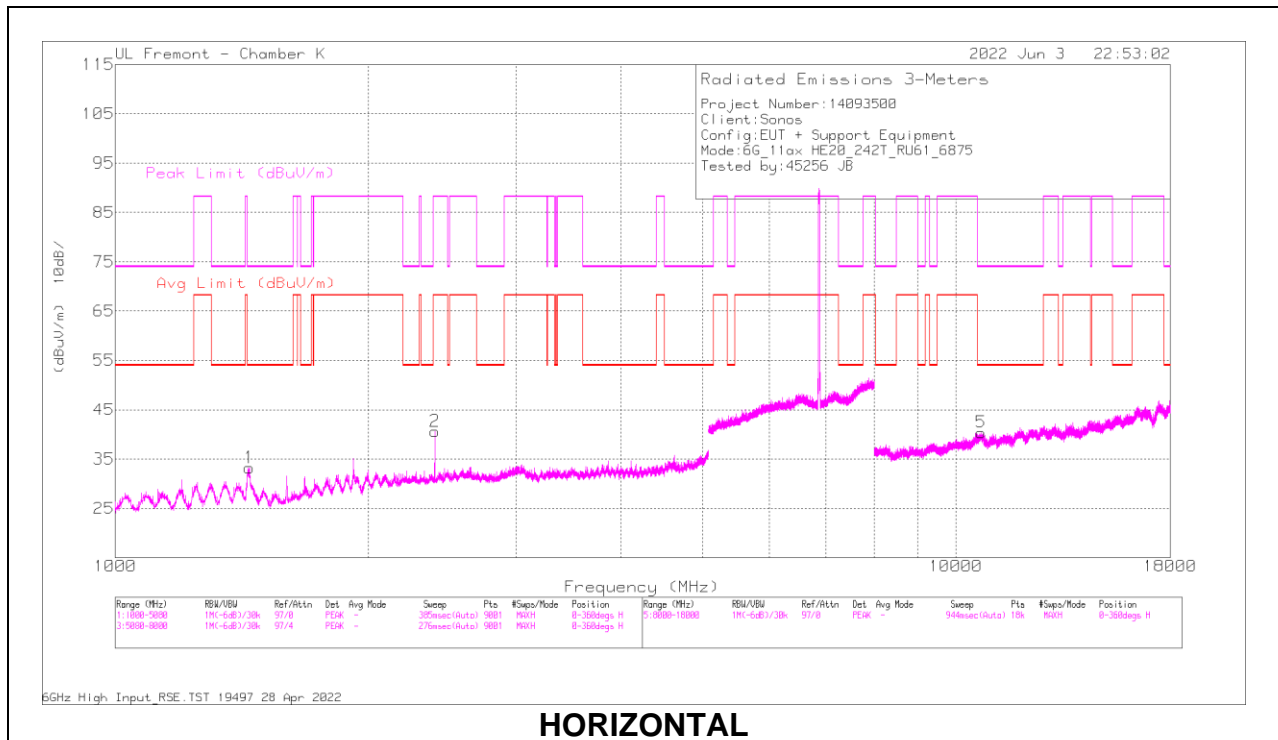

HORIZONTAL

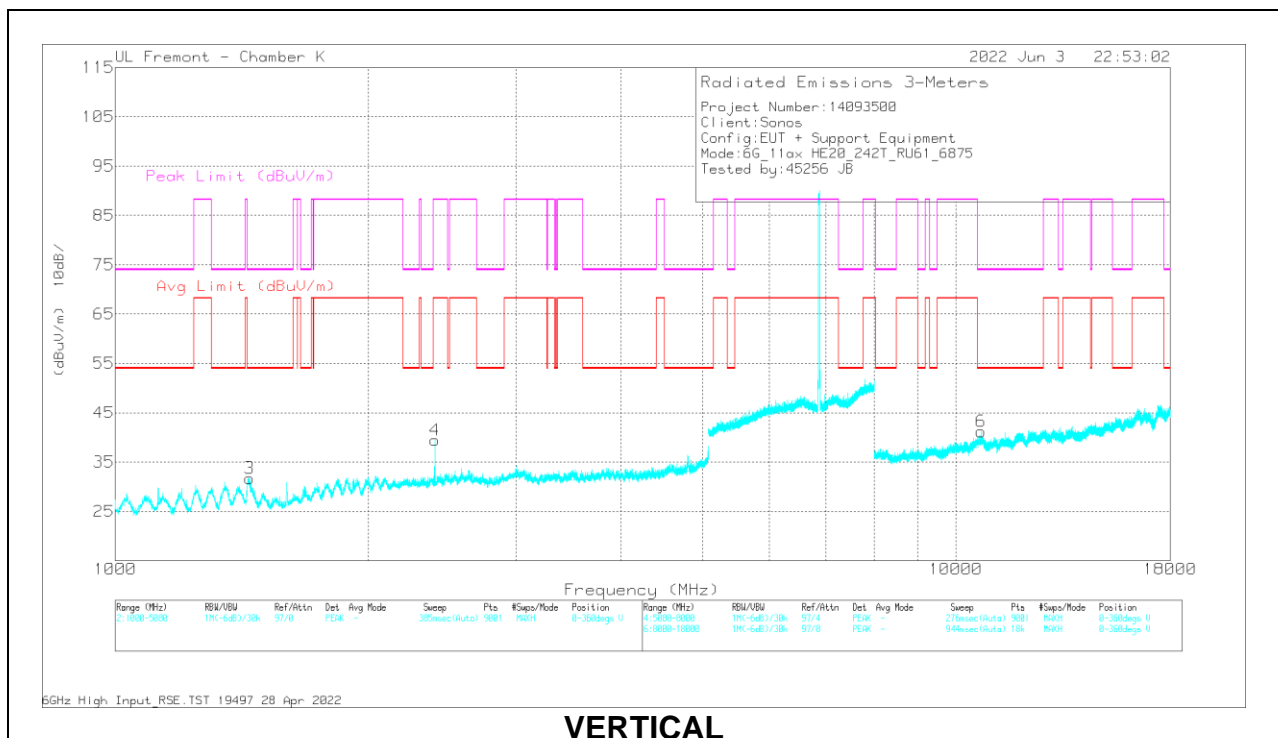

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1441.879	64.88	PK-U	29	-45.9	0	47.98	-	-	74	-26.02	187	160	H
	* 1442.522	47.94	ADR	29	-45.9	2.92	33.96	54	-20.04	-	-	187	160	H
2	2399.888	60.74	PK-U	32	-44.6	0	48.14	-	-	88.2	-40.06	158	376	H
	2399.988	49.67	ADR	32	-44.6	2.92	39.99	68.2	-28.21	-	-	158	376	H
3	* 1442.32	63.46	PK-U	29	-45.9	0	46.56	-	-	74	-27.44	209	115	V
	* 1442.3	47.19	ADR	29	-45.9	2.92	33.21	54	-20.59	-	-	209	115	V
4	2400.204	60.25	PK-U	32	-44.6	0	47.65	-	-	88.2	-40.55	206	151	V
	2400.096	52.01	ADR	32	-44.6	2.92	42.33	68.2	-25.67	-	-	206	151	V
5	* 10713.448	47.74	PK-U	38.1	-36.2	0	49.64	-	-	74	-24.36	154	239	H
	* 10713.711	36.46	ADR	38.1	-36.2	2.92	41.28	54	-12.52	-	-	154	239	H
6	* 10720.934	47.76	PK-U	38.2	-36.3	0	49.66	-	-	74	-24.34	217	326	V
	* 10722.484	36.28	ADR	38.2	-36.2	2.92	41.2	54	-12.8	-	-	217	326	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.8. TX ABOVE 1 GHz 802.11ax HE40 MODE IN THE UNII-7 BAND


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 0

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

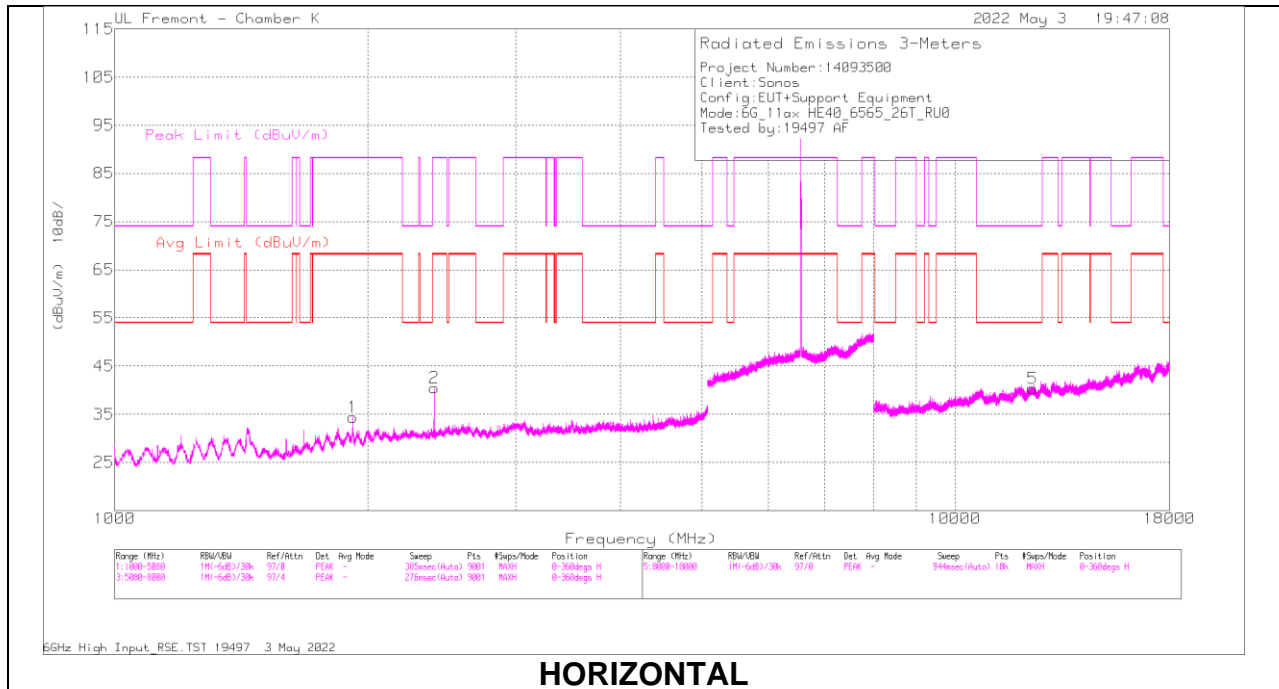

HORIZONTAL

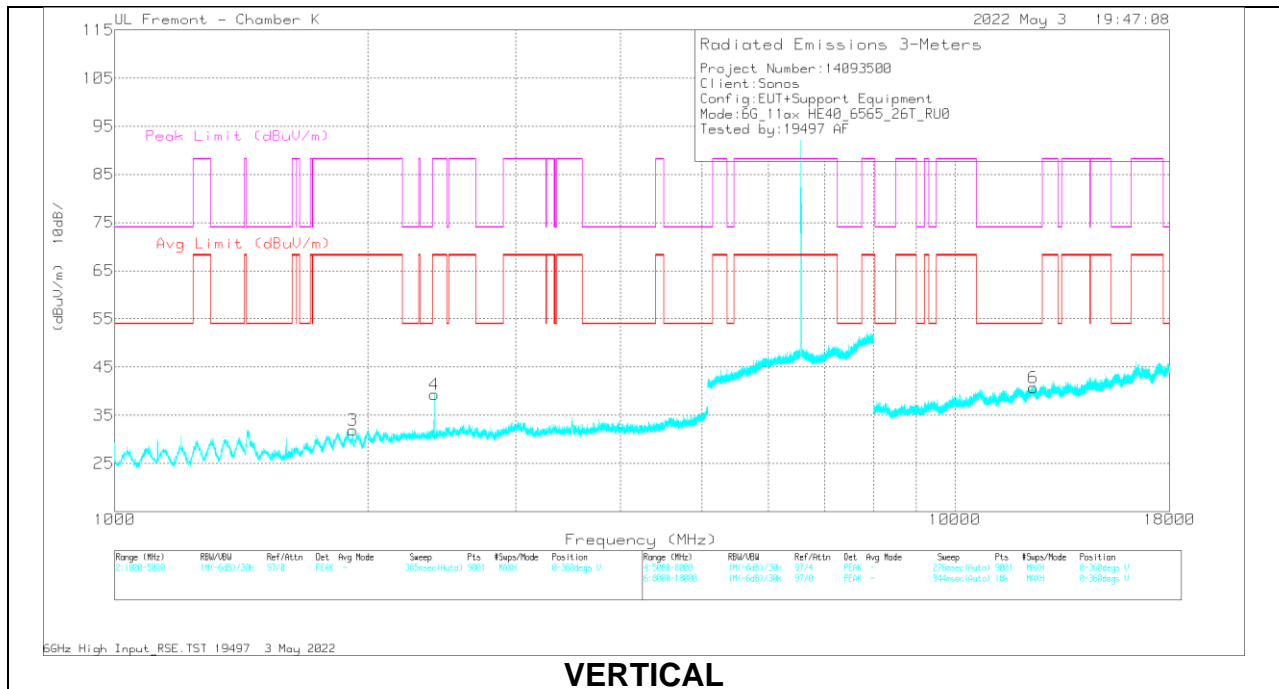

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1919.589	62.65	PK-U	31	-44.9	0	48.75	-	-	88.2	-39.45	164	326	H
	1920.115	43.6	ADR	31	-45	2.01	31.61	68.2	-36.59	-	-	164	326	H
2	2399.768	69.59	PK-U	32	-44.2	0	57.39	-	-	88.2	-30.81	35	223	H
	2400.049	50.59	ADR	32	-44.2	2.01	40.4	68.2	-27.8	-	-	35	223	H
3	1920.132	56.64	PK-U	31	-45	0	42.64	-	-	88.2	-45.56	309	184	V
	1919.982	42.24	ADR	31	-45	2.01	30.25	68.2	-37.95	-	-	309	184	V
4	2400.316	58.36	PK-U	32	-44.2	0	46.16	-	-	88.2	-42.04	329	98	V
	2400.116	46.94	ADR	32	-44.2	2.01	36.75	68.2	-31.45	-	-	329	98	V
5	* 12377.301	44.55	PK-U	39.1	-33.4	0	50.25	-	-	74	-23.75	240	376	H
	* 12378.692	32.77	ADR	39.1	-33.3	2.01	40.58	54	-13.42	-	-	240	376	H
6	* 12393.543	44.48	PK-U	39.1	-33.2	0	50.38	-	-	74	-23.62	9	392	V
	* 12395.749	32.6	ADR	39.1	-33.2	2.01	40.51	54	-13.49	-	-	9	392	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 8

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL

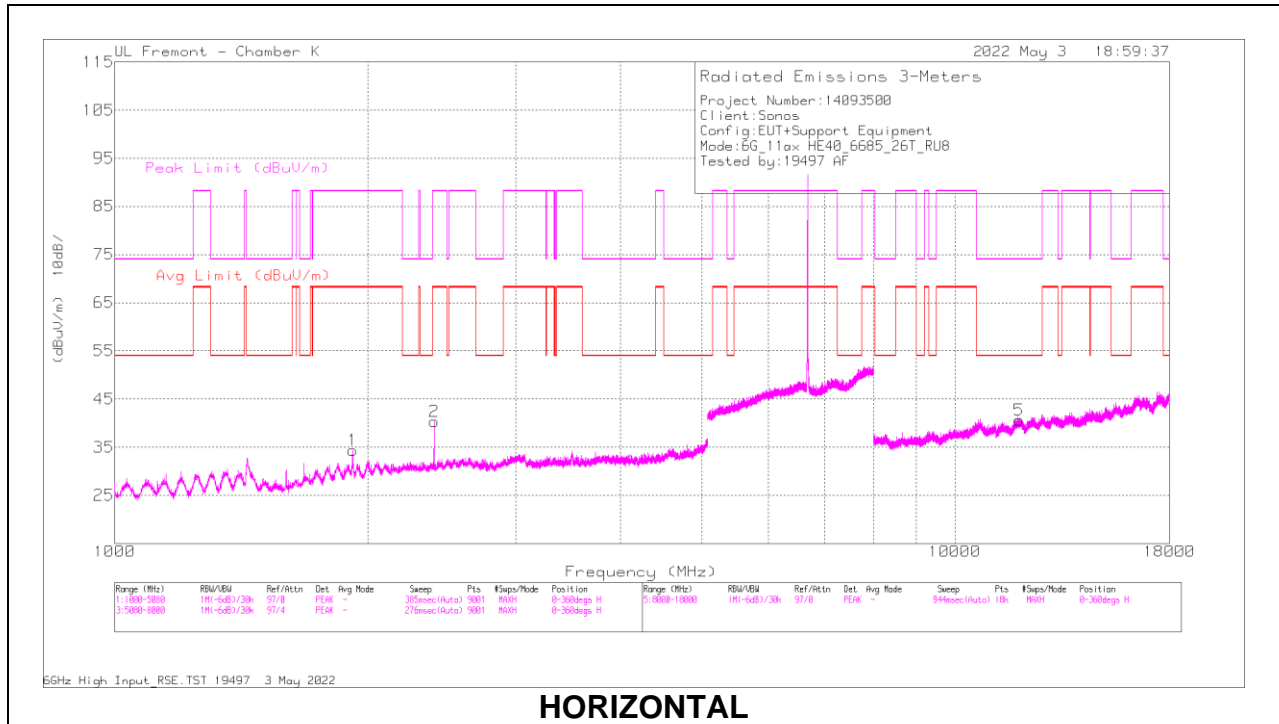

HORIZONTAL

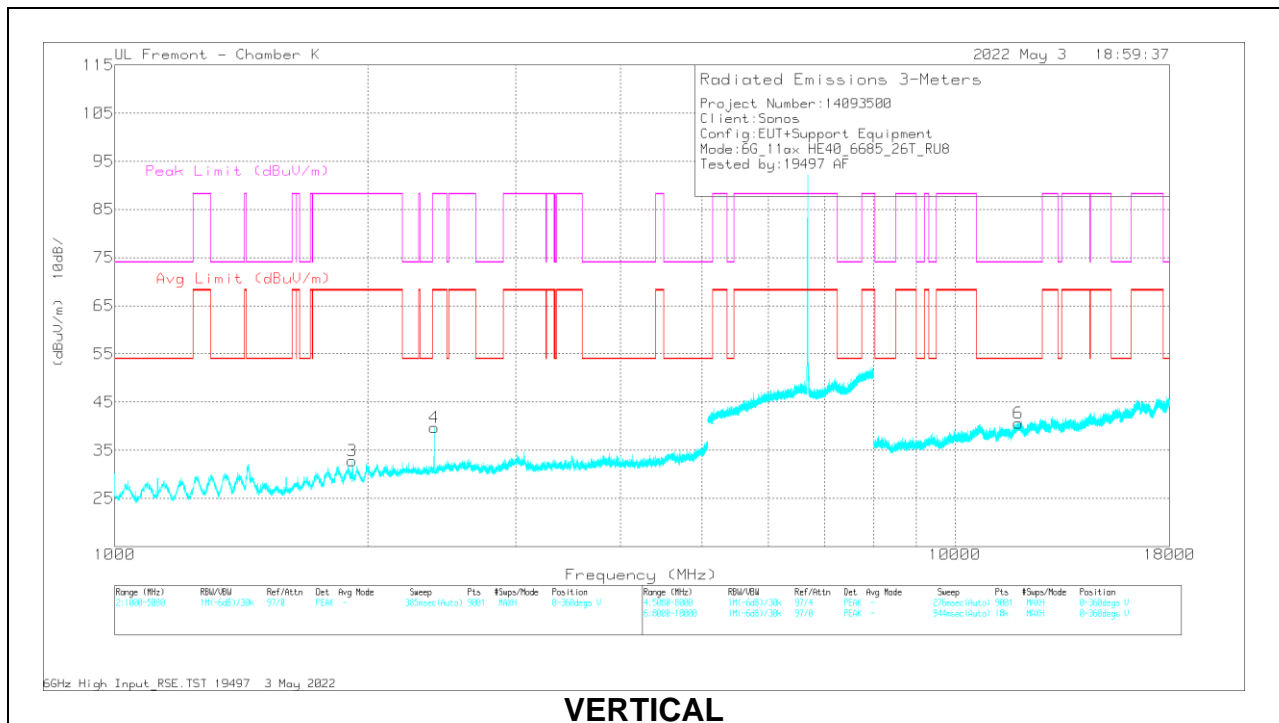

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1920.132	72	PK-U	31	-45	0	58	-	-	88.2	-30.2	167	100	H
	1919.978	47.5	ADR	31	-45	2.01	35.51	68.2	-32.69	-	-	167	100	H
2	2400.092	61.9	PK-U	32	-44.2	0	49.7	-	-	88.2	-38.5	36	222	H
	2400.027	51.3	ADR	32	-44.2	2.01	41.11	68.2	-27.09	-	-	36	222	H
3	1919.561	68.38	PK-U	31	-44.9	0	54.48	-	-	88.2	-33.72	152	338	V
	1920.062	43.93	ADR	31	-45	2.01	31.94	68.2	-36.26	-	-	152	338	V
4	2400.184	55.02	PK-U	32	-44.2	0	42.82	-	-	88.2	-45.38	316	104	V
	2400.056	48.86	ADR	32	-44.2	2.01	38.67	68.2	-29.53	-	-	316	104	V
5	* 11917.914	44.22	PK-U	38.7	-33.8	0	49.12	-	-	74	-24.88	116	352	H
	* 11917.534	33.04	ADR	38.7	-33.7	2.01	40.05	54	-13.95	-	-	116	352	H
6	* 11898.227	44.6	PK-U	38.7	-33.7	0	49.6	-	-	74	-24.4	223	133	V
	* 11897.819	33.33	ADR	38.7	-33.7	2.01	40.34	54	-13.66	-	-	223	133	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 17

HARMONICS AND SPURIOUS EMISSIONS

HIGH CHANNEL

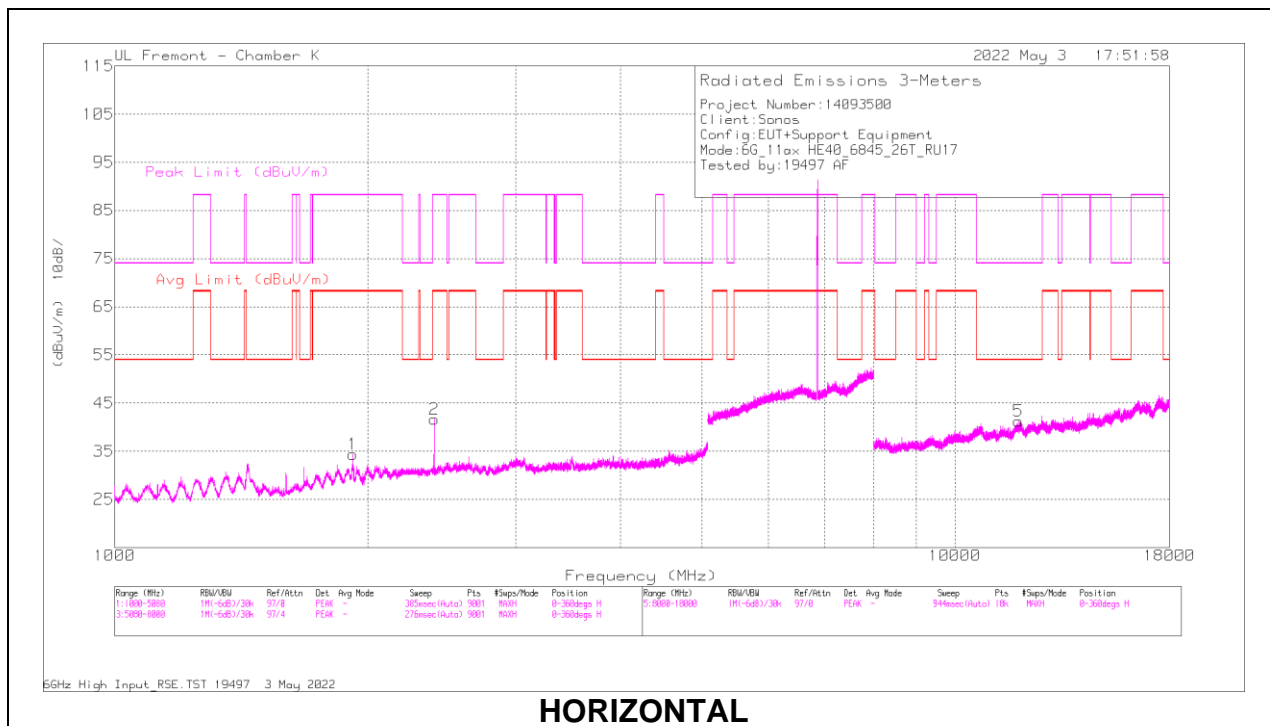

HORIZONTAL

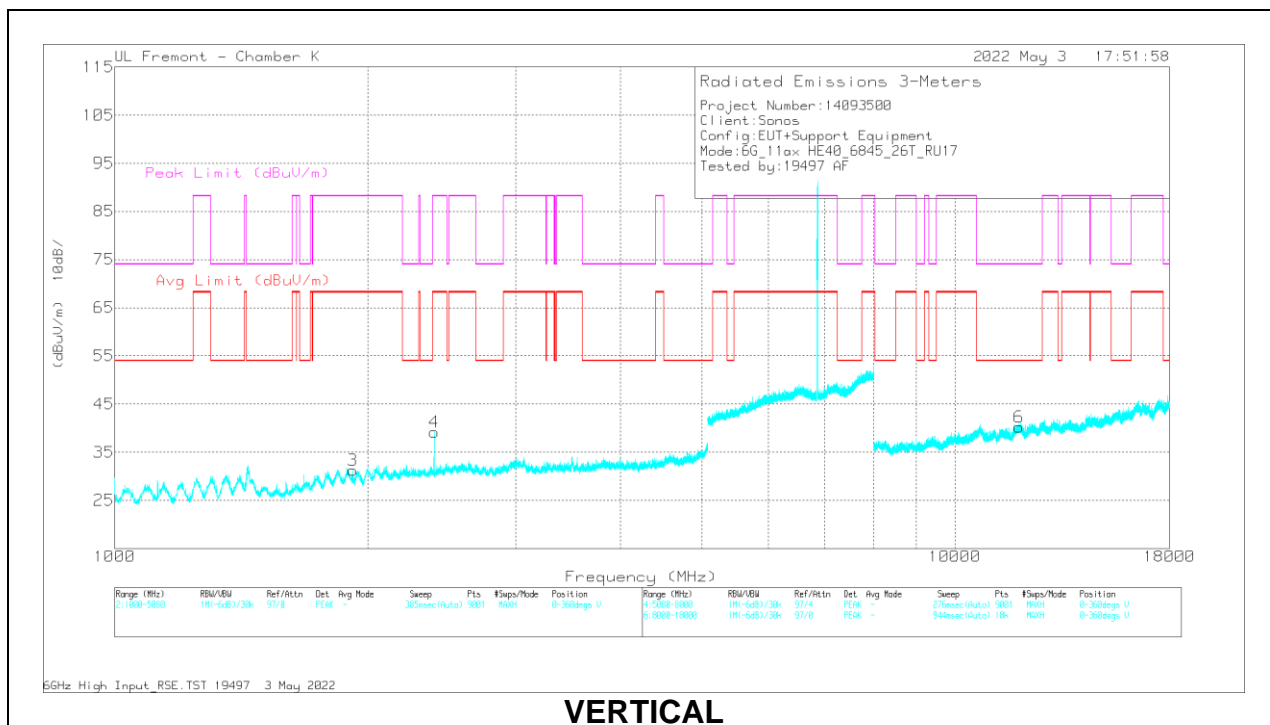

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1918.938	62.34	PK-U	31	-44.9	0	48.44	-	-	88.2	-39.76	168	210	H
	1920.113	46.84	ADR	31	-45	2.01	34.85	68.2	-33.35	-	-	168	210	H
2	2400.144	57.45	PK-U	32	-44.2	0	45.25	-	-	88.2	-42.95	257	171	H
	2400.051	48.55	ADR	32	-44.2	2.01	38.36	68.2	-29.84	-	-	257	171	H
3	1920.624	61.26	PK-U	31	-45.1	0	47.16	-	-	88.2	-41.04	156	285	V
	1919.927	43.09	ADR	31	-45	2.01	31.1	68.2	-37.1	-	-	156	285	V
4	2400.236	66.05	PK-U	32	-44.2	0	53.85	-	-	88.2	-34.35	329	101	V
	2400.028	47.19	ADR	32	-44.2	2.01	37	68.2	-31.2	-	-	329	101	V
5	* 11904.462	45.22	PK-U	38.7	-33.7	0	50.22	-	-	74	-23.78	144	298	H
	* 11904.478	33.32	ADR	38.7	-33.7	2.01	40.33	54	-13.67	-	-	144	298	H
6	* 11927.326	44.6	PK-U	38.7	-33.7	0	49.6	-	-	74	-24.4	8	316	V
	* 11928.265	33.06	ADR	38.7	-33.7	2.01	40.07	54	-13.93	-	-	8	316	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STRADDLE CHANNEL

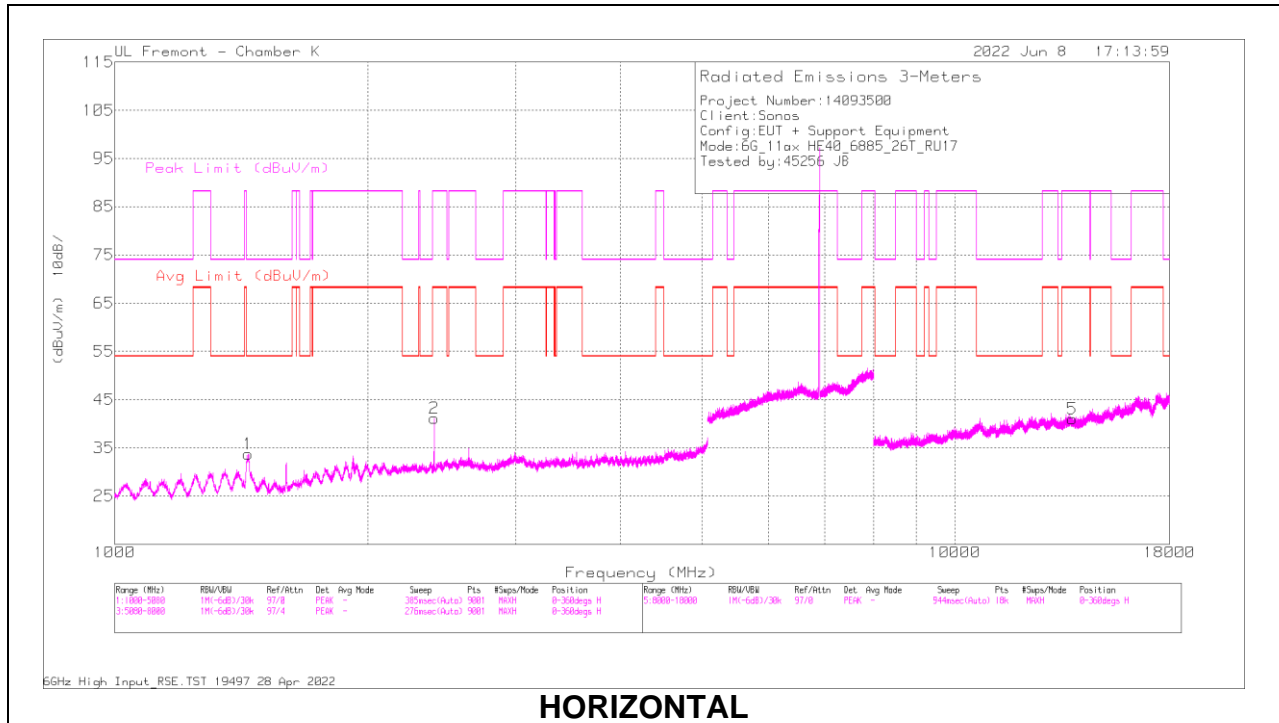

HORIZONTAL

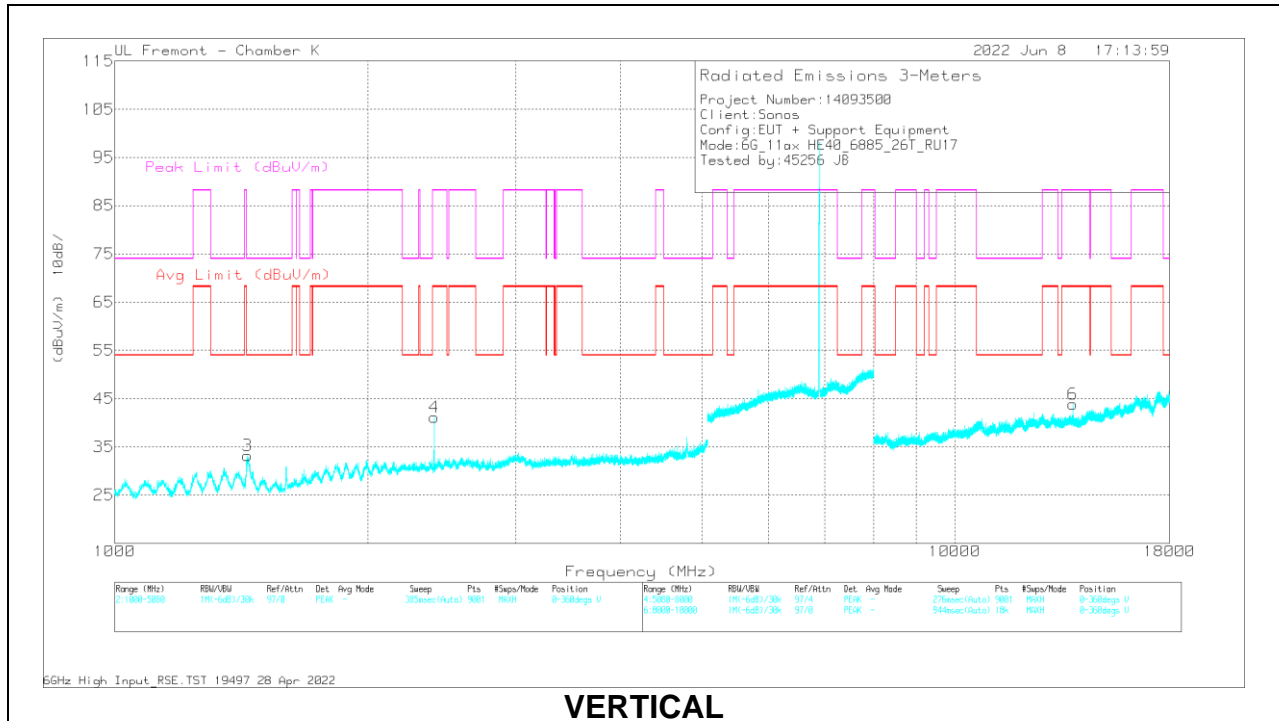

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cbl/Filtr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1439.992	70.82	PK-U	29	-46	0	53.82	-	-	74	-20.18	174	168	H
	* 1441.454	50.26	ADR	29	-45.9	2.01	35.37	54	-18.63	-	-	174	168	H
2	2400.276	60.24	PK-U	32	-44.6	0	47.64	-	-	88.2	-40.56	246	147	H
	2400.06	52.59	ADR	32	-44.6	2.01	42	68.2	-26.2	-	-	246	147	H
3	* 1439.454	70.45	PK-U	29	-46	0	53.45	-	-	74	-20.55	211	138	V
	* 1439.985	50.37	ADR	29	-46	2.01	35.38	54	-18.62	-	-	211	138	V
4	2399.844	61.7	PK-U	32	-44.6	0	49.1	-	-	88.2	-39.1	194	176	V
	2400.024	54.06	ADR	32	-44.6	2.01	43.47	68.2	-24.73	-	-	194	176	V
5	13795.728	46	PK-U	38.6	-34.2	0	50.4	-	-	88.2	-37.8	107	340	H
	13793.786	34.43	ADR	38.6	-34.2	2.01	40.84	68.2	-27.36	-	-	107	340	H
6	13805.148	54.25	PK-U	38.6	-34.5	0	58.35	-	-	88.2	-29.85	21	180	V
	13805.016	38.03	ADR	38.6	-34.5	2.01	44.14	68.2	-24.06	-	-	21	180	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 484-Tones, RU Index 65

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

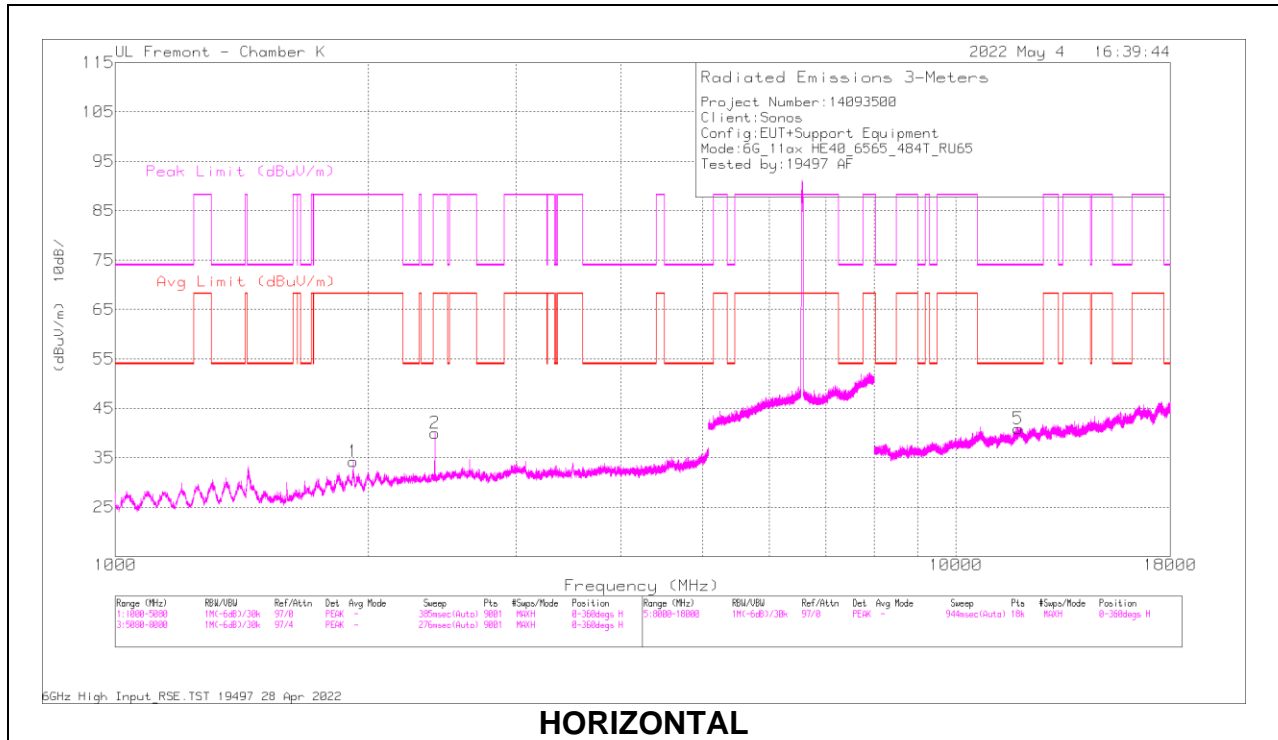

HORIZONTAL

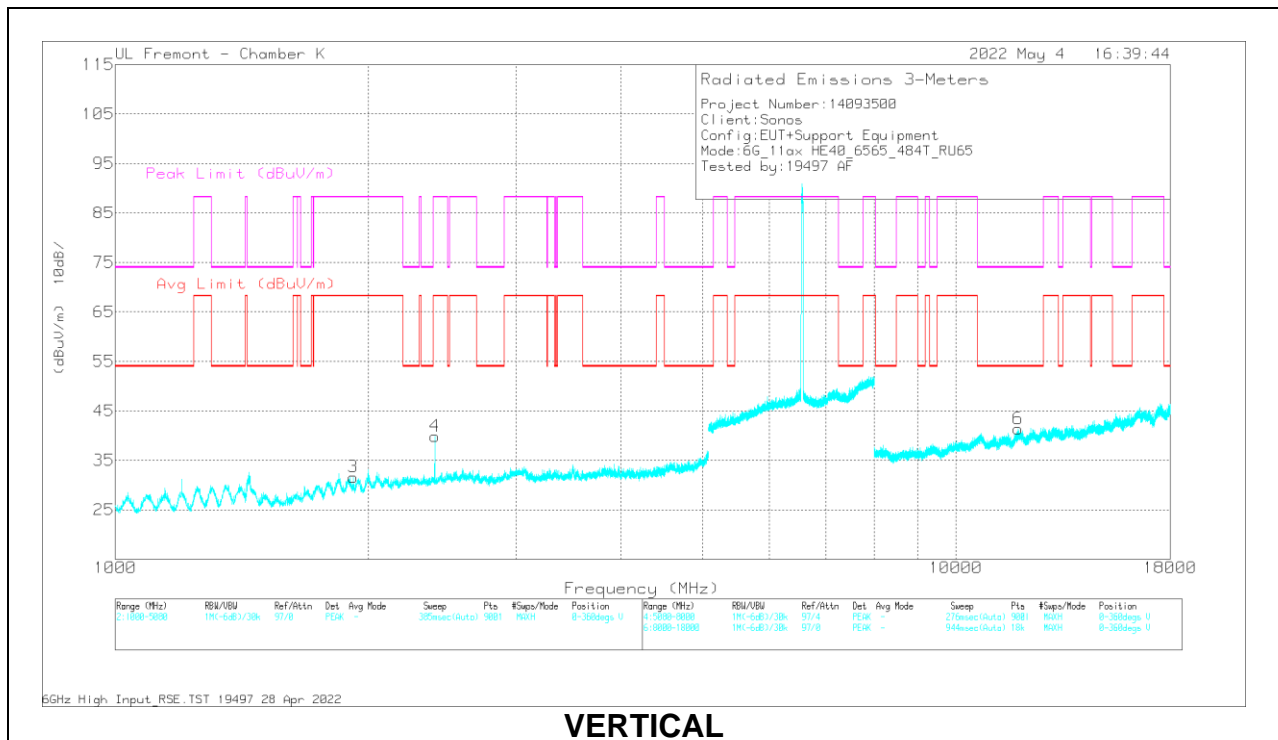

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1919.874	71.66	PK-U	31	-45	0	57.66	-	-	88.2	-30.54	164	137	H
	1919.994	47.44	ADR	31	-45	2.96	36.4	68.2	-31.8	-	-	164	137	H
2	2400.048	71.32	PK-U	32	-44.2	0	59.12	-	-	88.2	-29.08	175	290	H
	2400.057	52.59	ADR	32	-44.2	2.96	43.35	68.2	-24.85	-	-	175	290	H
3	1920.71	60.39	PK-U	31	-45.1	0	46.29	-	-	88.2	-41.91	150	234	V
	1922.05	42.09	ADR	30.9	-45.1	2.96	30.85	68.2	-37.35	-	-	150	234	V
4	2399.944	68.79	PK-U	32	-44.2	0	56.59	-	-	88.2	-31.61	189	203	V
	2400.095	49.47	ADR	32	-44.2	2.96	40.23	68.2	-27.97	-	-	189	203	V
5	* 11868.312	45.5	PK-U	38.7	-33.9	0	50.3	-	-	74	-23.7	233	102	H
	* 11867.433	33.47	ADR	38.7	-33.9	2.96	41.23	54	-12.77	-	-	233	102	H
6	* 11864.368	45.24	PK-U	38.7	-34	0	49.94	-	-	74	-24.06	241	297	V
	* 11866.07	33.59	ADR	38.7	-34	2.96	41.25	54	-12.75	-	-	241	297	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL

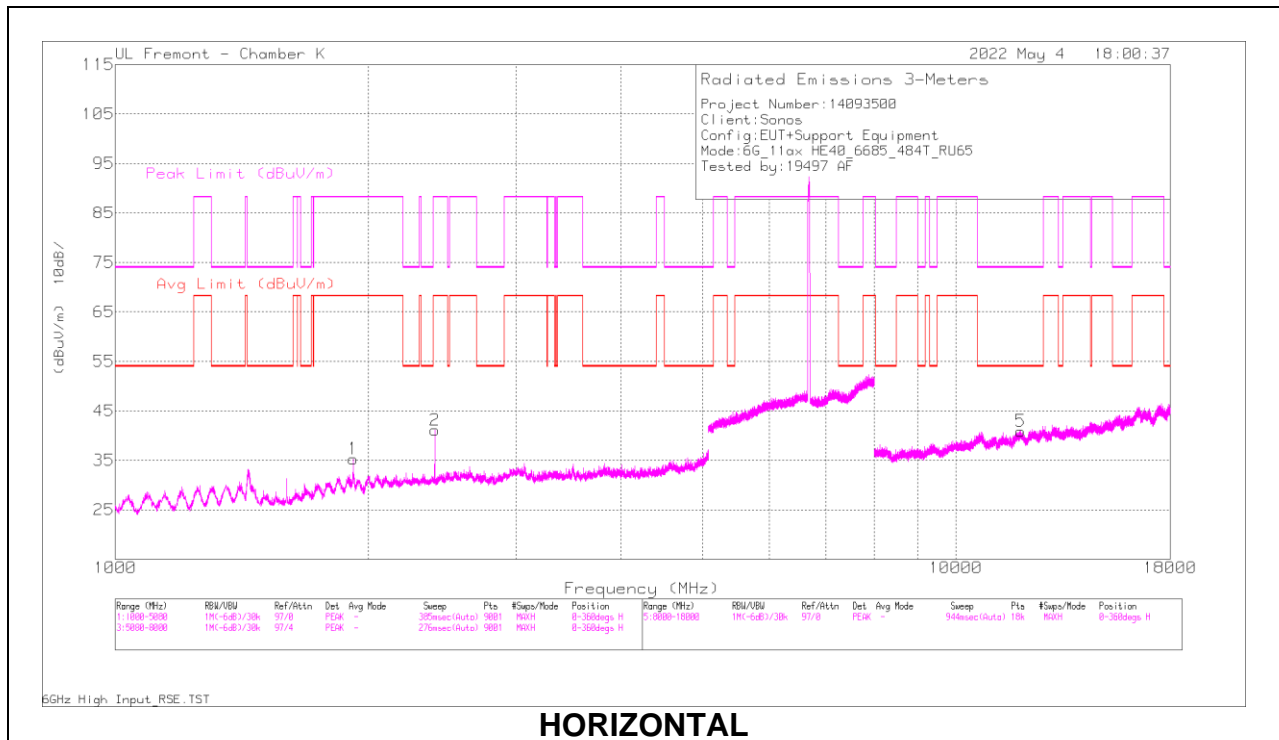

HORIZONTAL

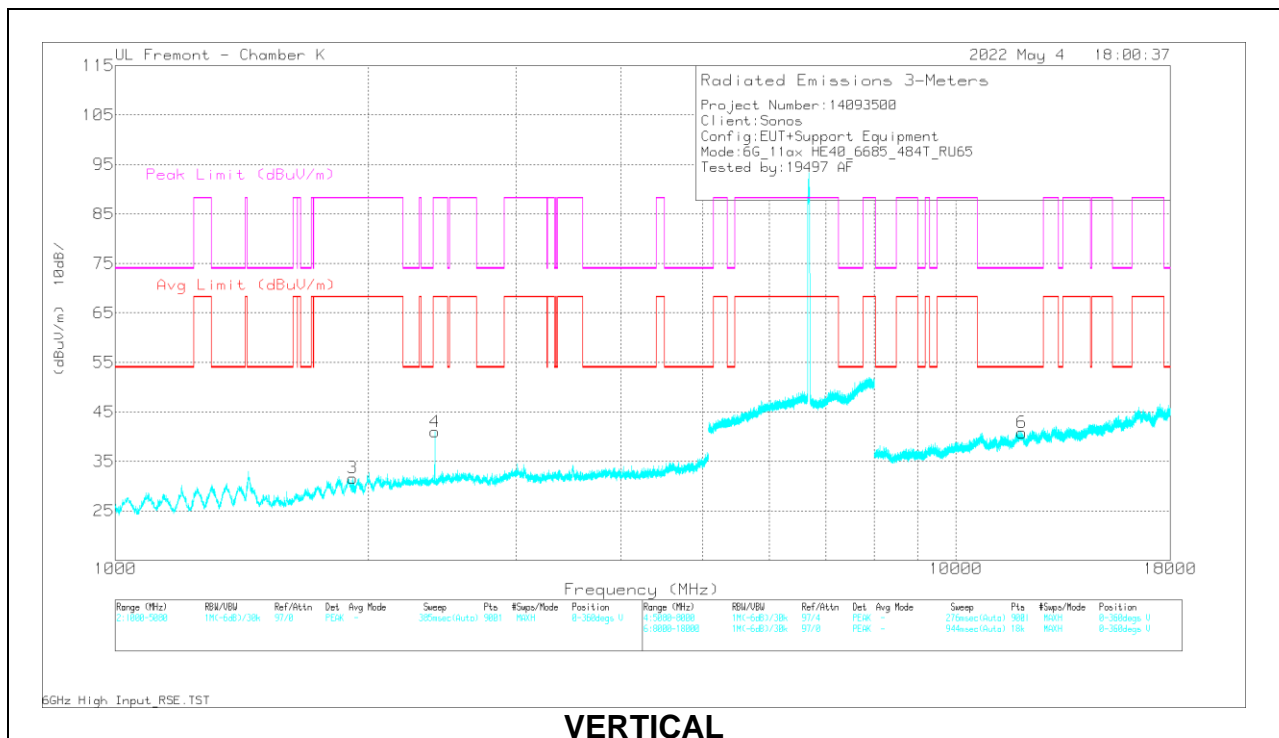

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1918.878	60.07	PK-U	31	-44.9	0	46.17	-	-	88.2	-42.03	325	242	H
	1919.989	44.11	ADR	31	-45	2.96	33.07	68.2	-35.13	-	-	325	242	H
2	2400.02	56.2	PK-U	32	-44.2	0	44	-	-	88.2	-44.2	168	186	H
	2400.069	47.86	ADR	32	-44.2	2.96	38.62	68.2	-29.58	-	-	168	186	H
3	1918.076	58.47	PK-U	31	-44.8	0	44.67	-	-	88.2	-43.53	324	126	V
	1914.92	41.99	ADR	30.9	-45.1	2.96	30.75	68.2	-37.45	-	-	324	126	V
4	2400.044	59.25	PK-U	32	-44.2	0	47.05	-	-	88.2	-41.15	181	153	V
	2400.03	47.09	ADR	32	-44.2	2.96	37.85	68.2	-30.35	-	-	181	153	V
5	* 11949.212	44.79	PK-U	38.7	-33.4	0	50.09	-	-	74	-23.91	35	373	H
	* 11950.81	32.98	ADR	38.7	-33.4	2.96	41.24	54	-12.76	-	-	35	373	H
6	* 11993.965	44.08	PK-U	38.8	-33.1	0	49.78	-	-	74	-24.22	178	241	V
	* 11993.397	32.57	ADR	38.8	-33.2	2.96	41.13	54	-12.87	-	-	178	241	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL

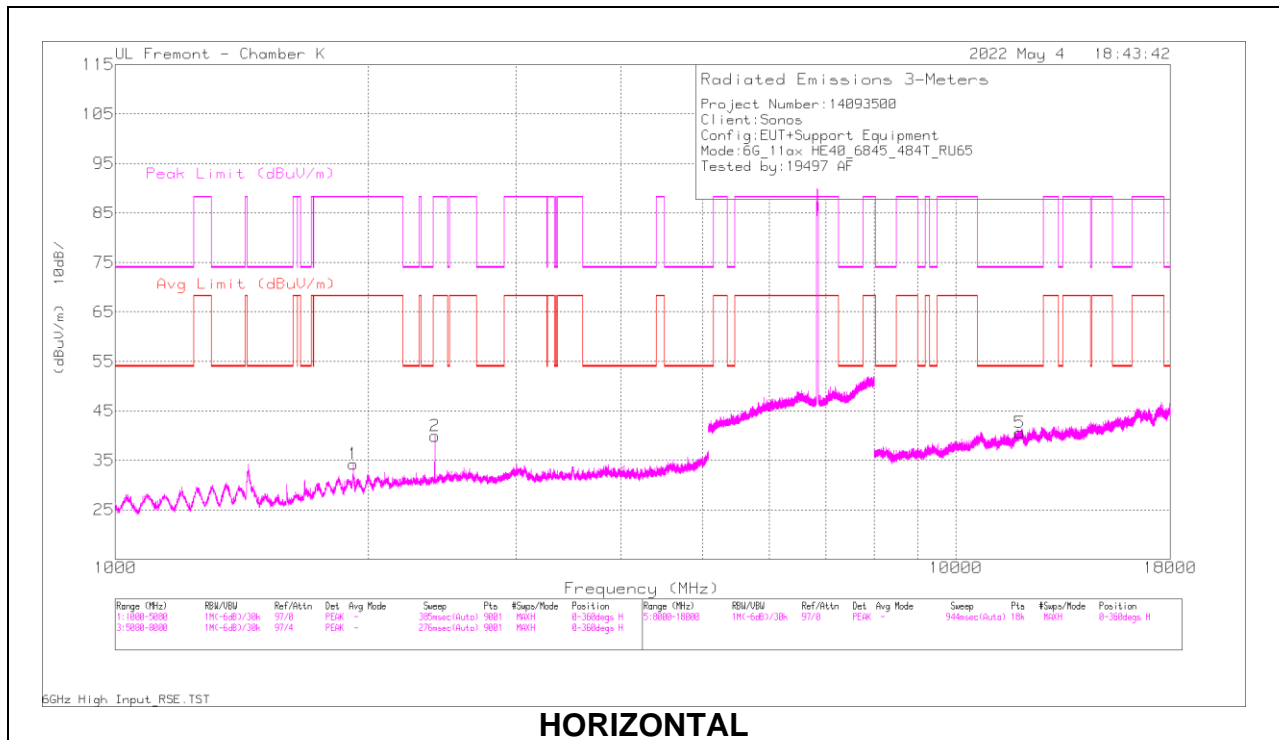

HORIZONTAL

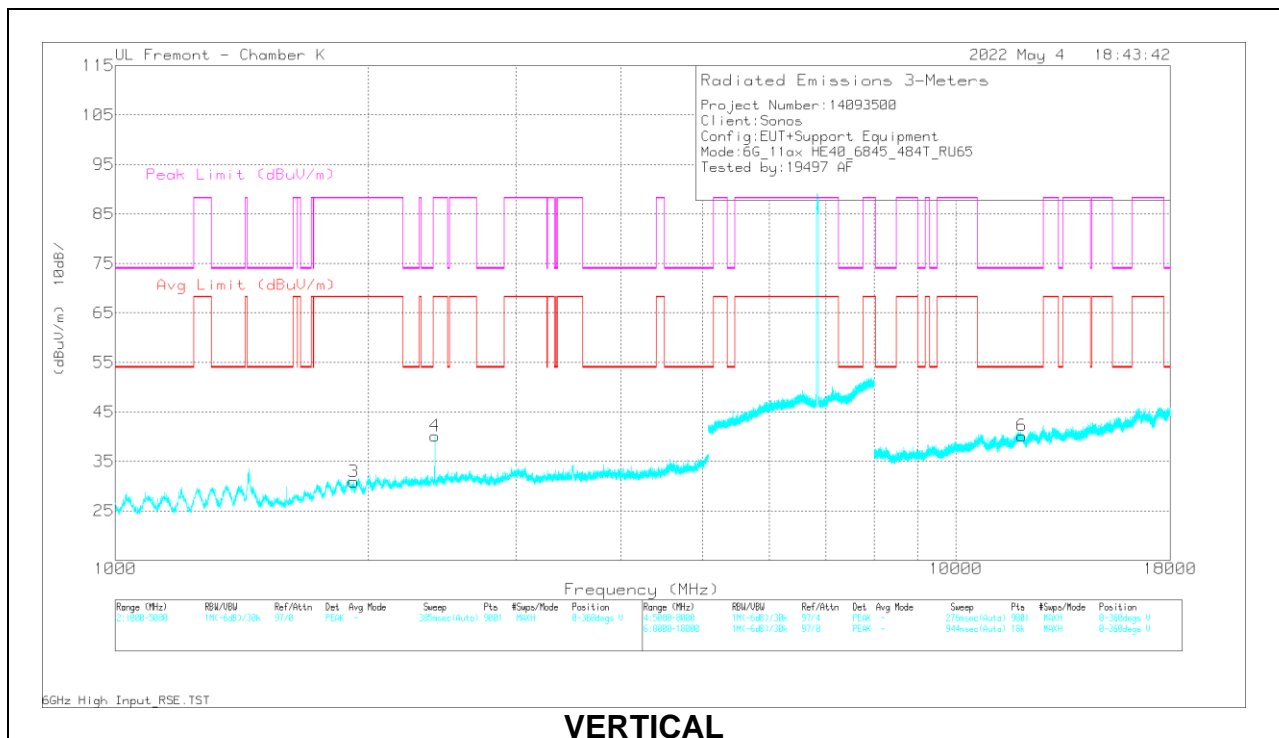

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1919.651	67.47	PK-U	31	-44.9	0	53.57	-	-	88.2	-34.63	173	392	H
	1919.985	44.4	ADR	31	-45	2.96	33.36	68.2	-34.84	-	-	173	392	H
2	2399.868	57.61	PK-U	32	-44.2	0	45.41	-	-	88.2	-42.79	60	259	H
	2400.049	45.09	ADR	32	-44.2	2.96	35.85	68.2	-32.35	-	-	60	259	H
3	1921.438	60.25	PK-U	31	-45.1	0	46.15	-	-	88.2	-42.05	285	150	V
	1920.094	42.59	ADR	31	-45	2.96	31.55	68.2	-36.65	-	-	285	150	V
4	2399.776	60.62	PK-U	32	-44.2	0	48.42	-	-	88.2	-39.78	196	264	V
	2400.084	48.03	ADR	32	-44.2	2.96	38.79	68.2	-29.41	-	-	196	264	V
5	* 11917.231	44.54	PK-U	38.7	-33.7	0	49.54	-	-	74	-24.46	164	145	H
	* 11919.289	33.26	ADR	38.7	-33.8	2.96	41.12	54	-12.88	-	-	164	145	H
6	* 11989.137	44.87	PK-U	38.8	-33.3	0	50.37	-	-	74	-23.63	34	188	V
	* 11988.773	32.53	ADR	38.8	-33.3	2.96	40.99	54	-13.01	-	-	34	188	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STRADDLE CHANNEL

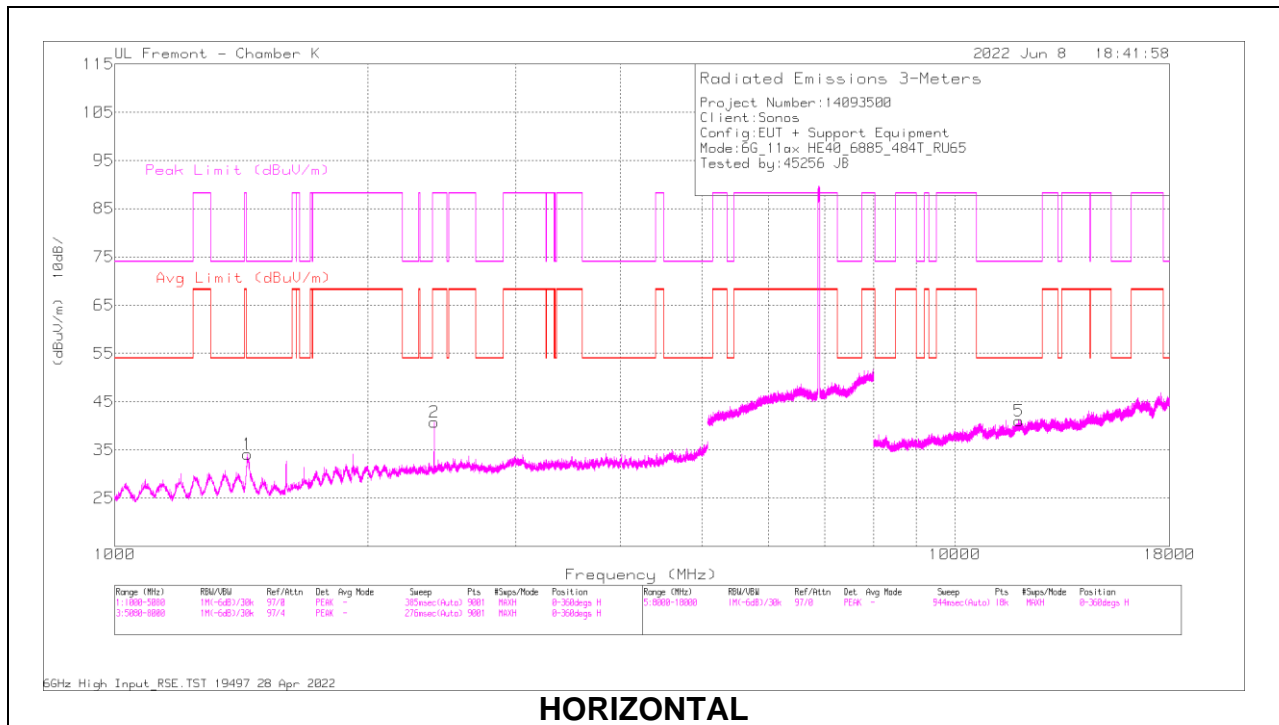

HORIZONTAL

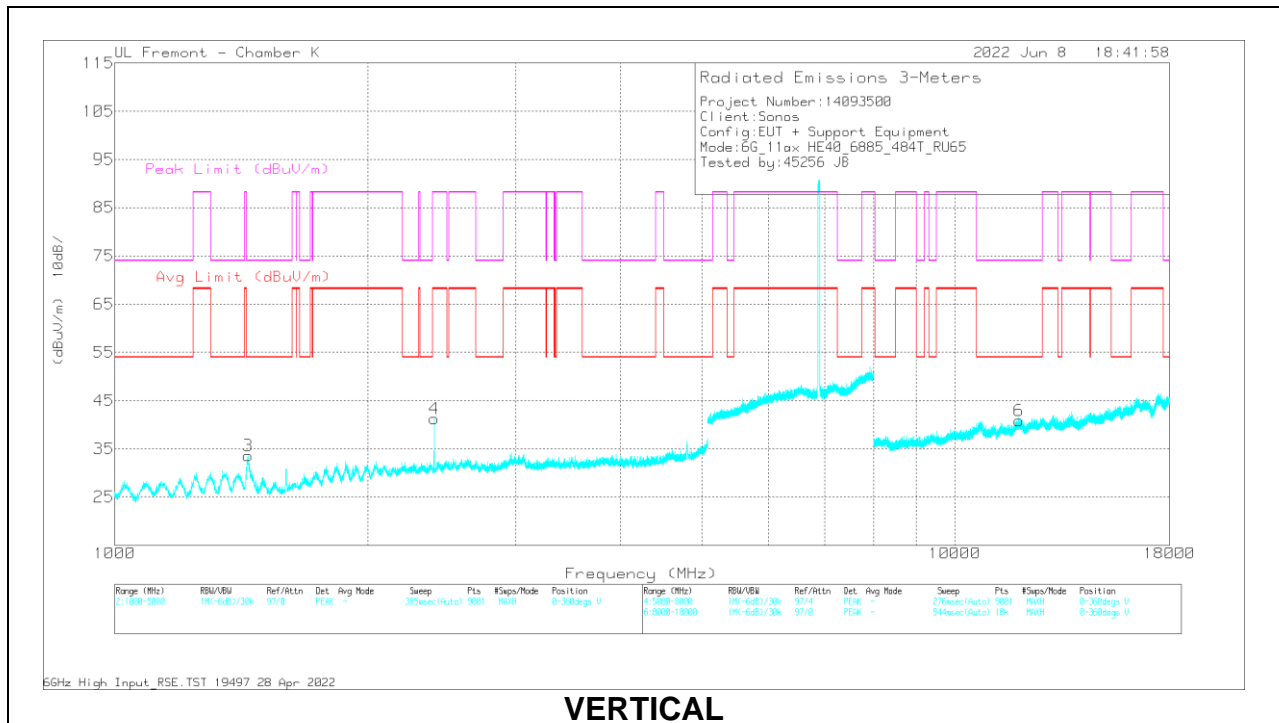

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1440.061	70.9	PK-U	29	-45.9	0	54	-	-	74	-20	164	163	H
	* 1440.668	50.24	ADR	29	-45.9	2.96	36.3	54	-17.7	-	-	164	163	H
2	2400.128	61.43	PK-U	32	-44.6	0	48.83	-	-	88.2	-39.37	268	197	H
	2400.012	53.74	ADR	32	-44.6	2.96	44.1	68.2	-24.1	-	-	268	197	H
3	* 1440.462	67.5	PK-U	29	-45.9	0	50.6	-	-	74	-23.4	256	132	V
	* 1440.546	48.12	ADR	29	-45.9	2.96	34.18	54	-19.82	-	-	256	132	V
4	2399.653	67.62	PK-U	32	-44.6	0	55.02	-	-	88.2	-33.18	202	173	V
	2400.064	53.07	ADR	32	-44.6	2.96	43.43	68.2	-24.77	-	-	202	173	V
5	* 11912.57	46.47	PK-U	38.7	-34.7	0	50.47	-	-	74	-23.53	127	244	H
	* 11911.216	34.45	ADR	38.7	-34.8	2.96	41.31	54	-12.69	-	-	127	244	H
6	* 11927.134	45.75	PK-U	38.7	-34.7	0	49.75	-	-	74	-24.25	294	342	V
	* 11926.838	34.28	ADR	38.7	-34.7	2.96	41.24	54	-12.76	-	-	294	342	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.9. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE UNII-7 BAND


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 0

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

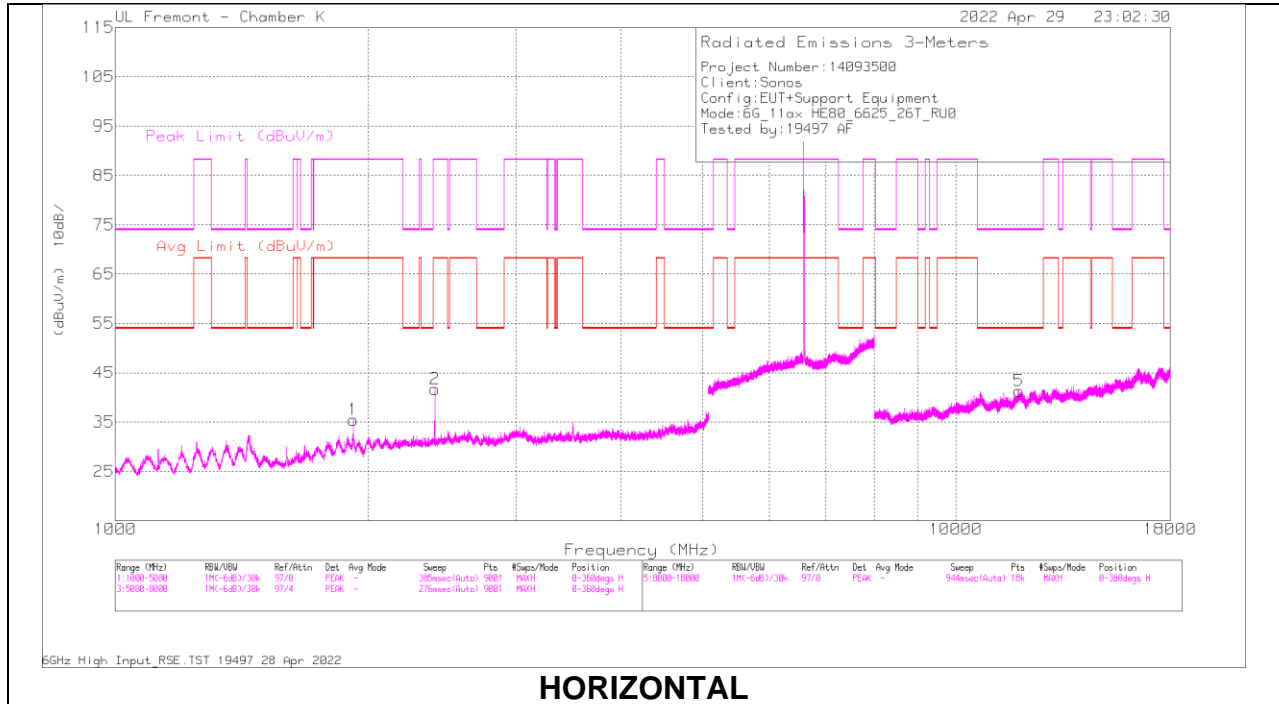

HORIZONTAL

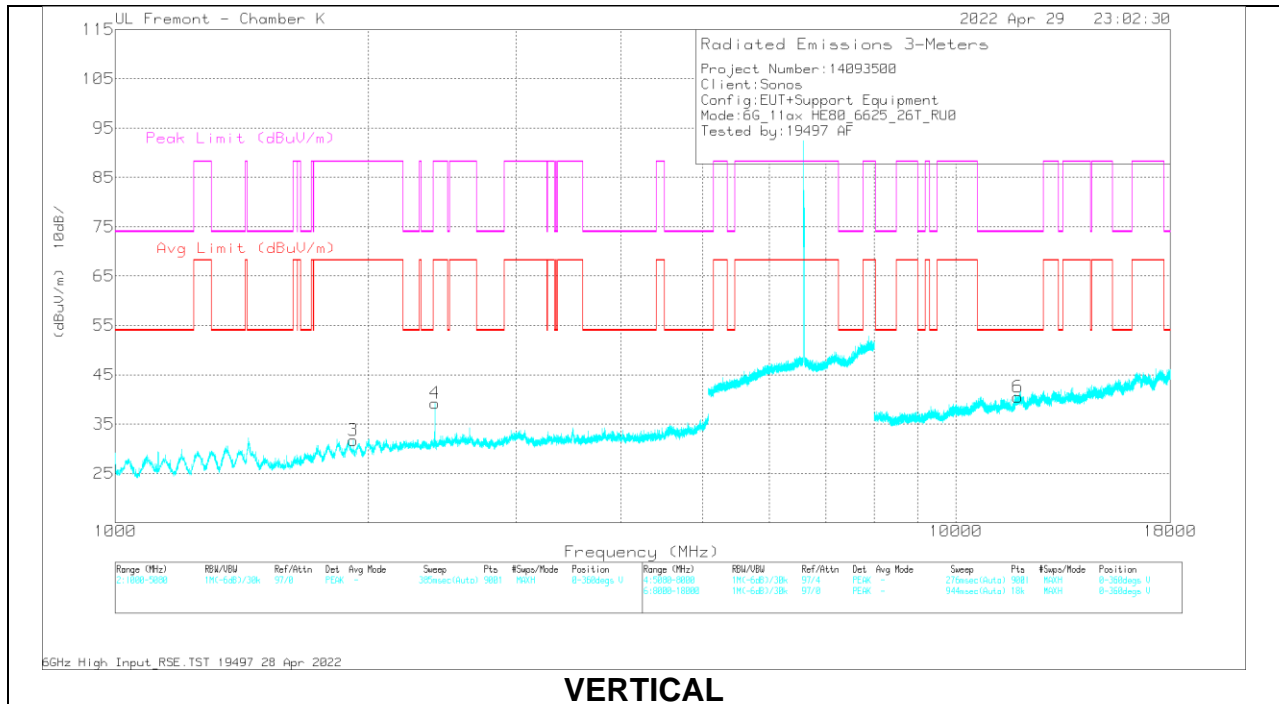

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1919.387	65.83	PK-U	31	-44.9	0	51.93	-	-	88.2	-36.27	220	201	H
	1920.029	48.37	ADR	31	-45	2.01	36.38	68.2	-31.82	-	-	220	201	H
2	2400.312	60.35	PK-U	32	-44.2	0	48.15	-	-	88.2	-40.05	260	191	H
	2400.06	46	ADR	32	-44.2	2.01	35.81	68.2	-32.39	-	-	260	191	H
3	1920.424	64.19	PK-U	31	-45	0	50.19	-	-	88.2	-38.01	143	206	V
	1920.064	43.44	ADR	31	-45	2.01	31.45	68.2	-36.75	-	-	143	206	V
4	2399.828	56.86	PK-U	32	-44.2	0	44.66	-	-	88.2	-43.54	9	160	V
	2399.968	50.75	ADR	32	-44.2	2.01	40.56	68.2	-27.64	-	-	9	160	V
5	* 11890.458	45.06	PK-U	38.7	-33.7	0	50.06	-	-	74	-23.94	62	381	H
	* 11892.528	33.62	ADR	38.7	-33.7	2.01	40.63	54	-13.37	-	-	62	381	H
6	* 11855.879	45.2	PK-U	38.7	-34	0	49.9	-	-	74	-24.1	127	206	V
	* 11856.826	33.8	ADR	38.7	-34	2.01	40.51	54	-13.49	-	-	127	206	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 18

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL

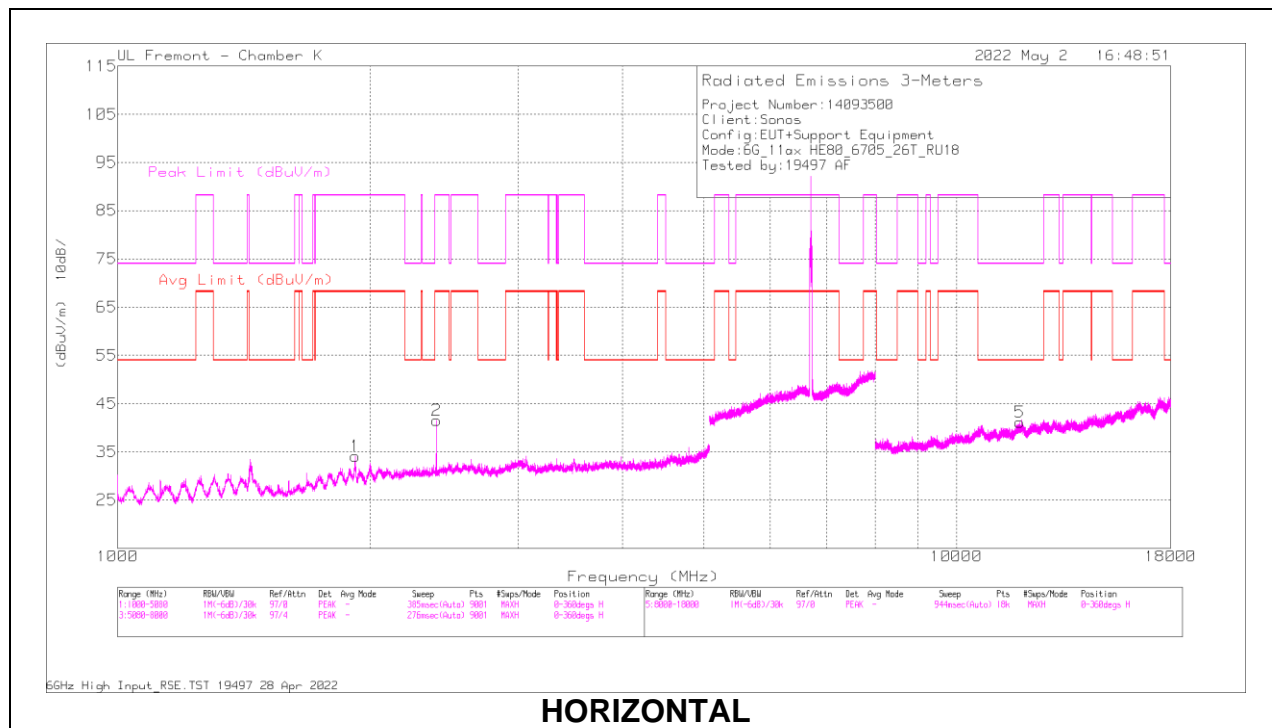

HORIZONTAL

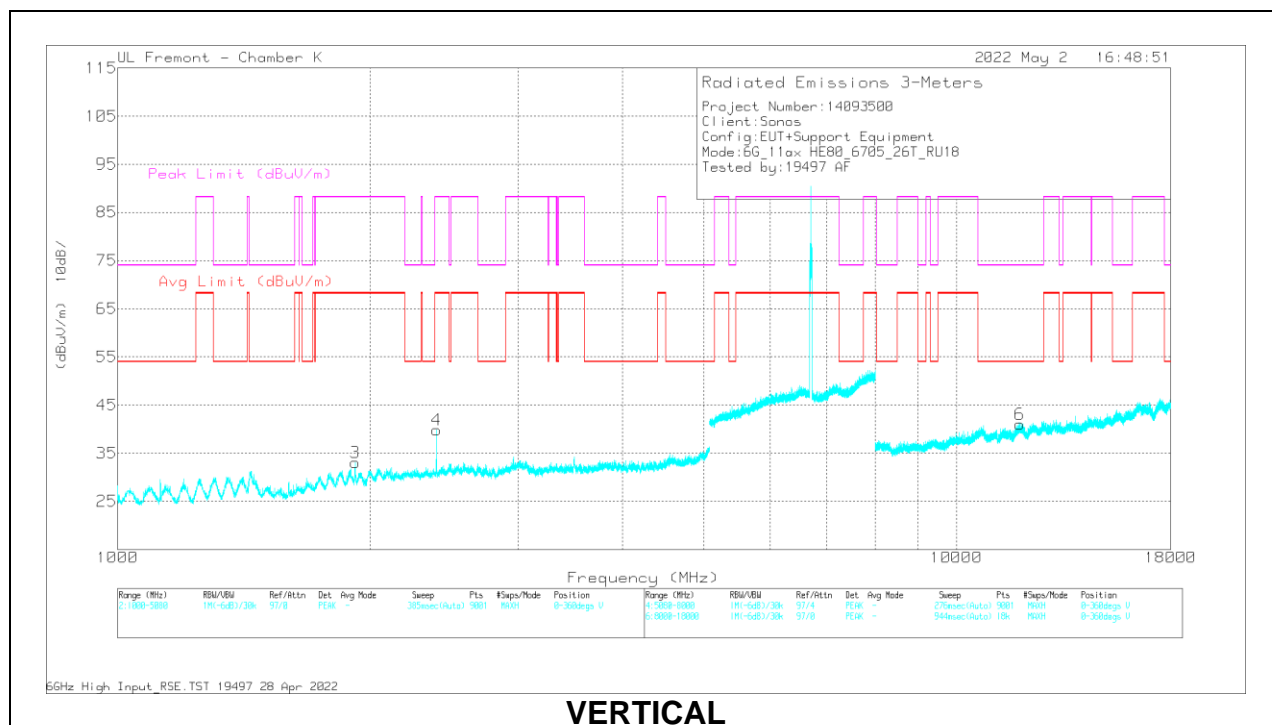

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	2400.108	60.98	PK-U	32	-44.2	0	48.78	-	-	88.2	-39.42	139	240	H
	2400.029	50.05	ADR	32	-44.2	2.01	39.86	68.2	-28.34	-	-	139	240	H
1	1919.718	72.72	PK-U	31	-45	0	58.72	-	-	88.2	-29.48	168	114	H
	1920.058	45.81	ADR	31	-45	2.01	33.82	68.2	-34.38	-	-	168	114	H
4	2399.868	60.7	PK-U	32	-44.2	0	48.5	-	-	88.2	-39.7	190	180	V
	2400.092	43.02	ADR	32	-44.2	2.01	32.83	68.2	-35.37	-	-	190	180	V
3	1919.793	72.7	PK-U	31	-45	0	58.7	-	-	88.2	-29.5	309	163	V
	1920.079	42.48	ADR	31	-45	2.01	30.49	68.2	-37.71	-	-	309	163	V
5	* 11891.868	45.29	PK-U	38.7	-33.7	0	50.29	-	-	74	-23.71	143	279	H
	* 11891.664	33.62	ADR	38.7	-33.7	2.01	40.63	54	-13.37	-	-	143	279	H
6	* 11898.646	44.84	PK-U	38.7	-33.7	0	49.84	-	-	74	-24.16	107	212	V
	* 11899.046	33.6	ADR	38.7	-33.7	2.01	40.61	54	-13.39	-	-	107	212	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 36

HARMONICS AND SPURIOUS EMISSIONS

HIGH CHANNEL

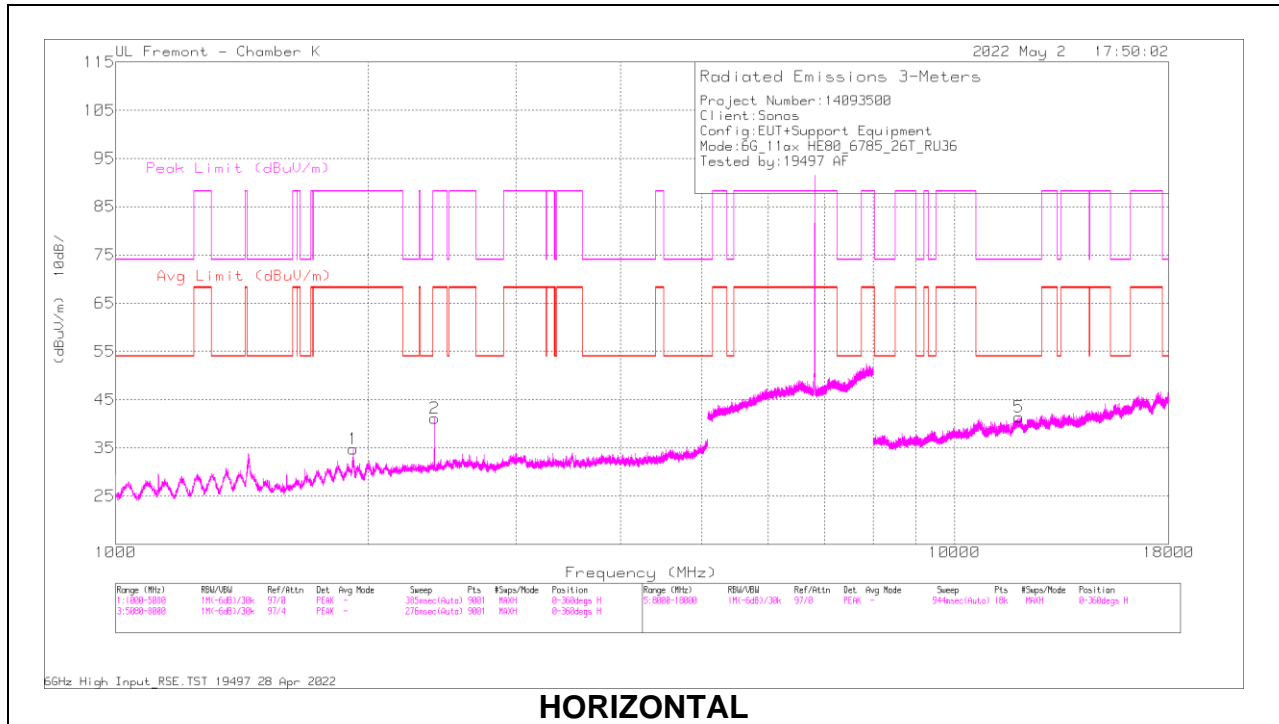

HORIZONTAL

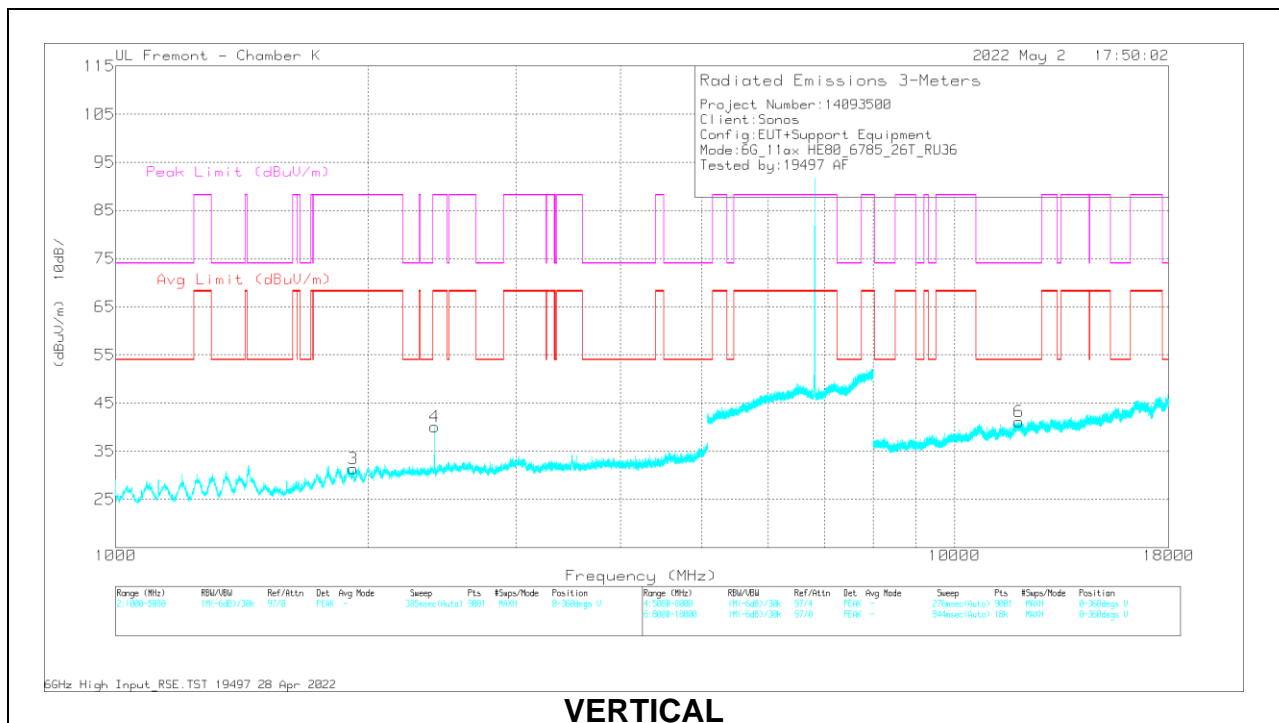

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1920.562	65.52	PK-U	31	-45.1	0	51.42	-	-	88.2	-36.78	167	161	H
	1920.117	45.67	ADR	31	-45	2.01	33.68	68.2	-34.52	-	-	167	161	H
2	2400.236	66.68	PK-U	32	-44.2	0	54.48	-	-	88.2	-33.72	52	108	H
	2400.009	50.04	ADR	32	-44.2	2.01	39.85	68.2	-28.35	-	-	52	108	H
3	1920.885	60.5	PK-U	31	-45.1	0	46.4	-	-	88.2	-41.8	178	237	V
	1920.004	42.6	ADR	31	-45	2.01	30.61	68.2	-37.59	-	-	178	237	V
4	2400.16	60.88	PK-U	32	-44.2	0	48.68	-	-	88.2	-39.52	197	154	V
	2400.041	43.01	ADR	32	-44.2	2.01	32.82	68.2	-35.38	-	-	197	154	V
5	* 11939.052	44.39	PK-U	38.7	-33.5	0	49.59	-	-	74	-24.41	288	374	H
	* 11942.293	33.18	ADR	38.7	-33.5	2.01	40.39	54	-13.61	-	-	288	374	H
6	* 11943.884	44.34	PK-U	38.7	-33.4	0	49.64	-	-	74	-24.36	20	197	V
	* 11943.96	32.96	ADR	38.7	-33.4	2.01	40.27	54	-13.73	-	-	20	197	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STRADDLE CHANNEL

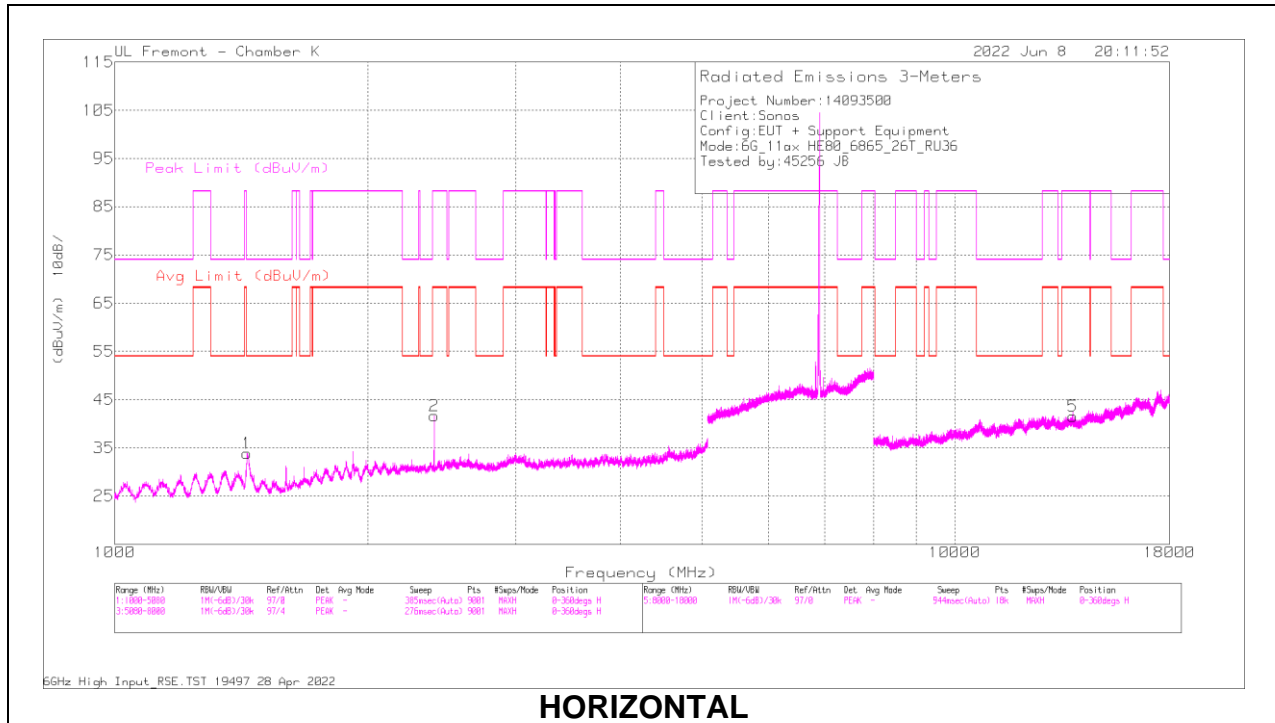

HORIZONTAL

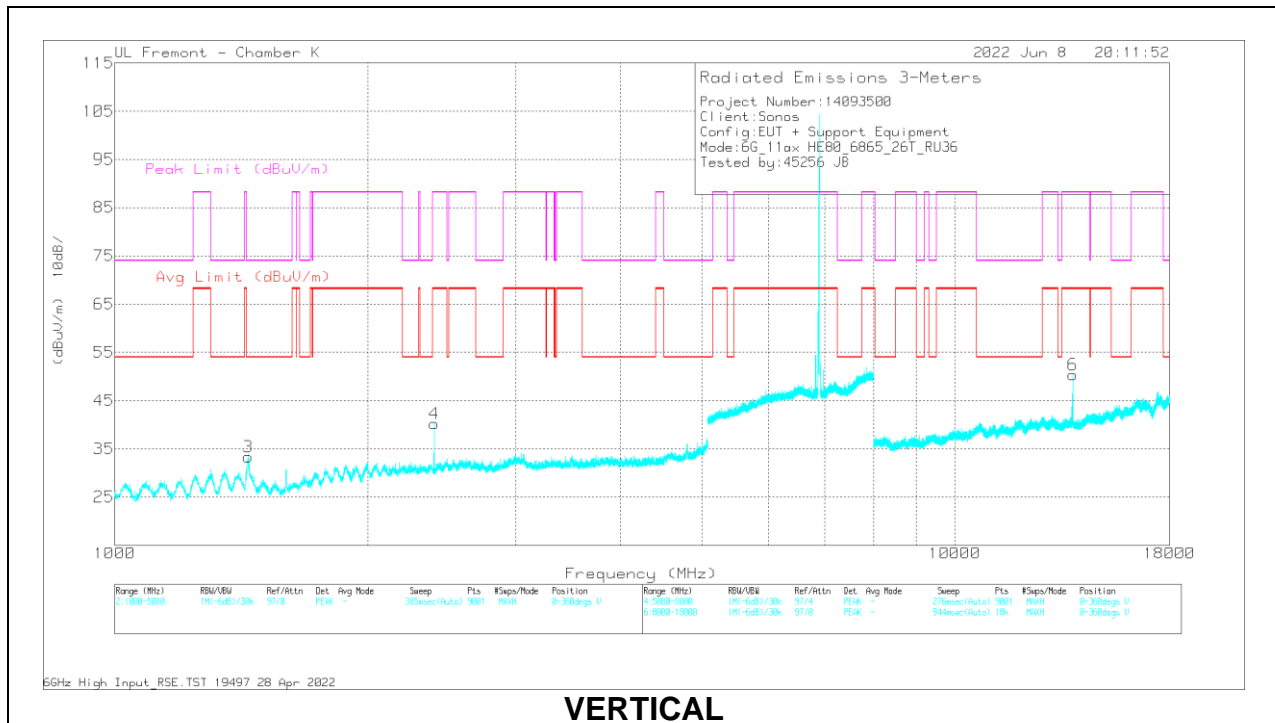

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cbl/Filtr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1439.376	69.9	PK-U	29	-46	0	52.9	-	-	74	-21.1	169	142	H
	* 1439.261	49.66	ADR	29	-46	2.01	34.67	54	-19.33	-	-	169	142	H
2	2400.308	61.01	PK-U	32	-44.6	0	48.41	-	-	88.2	-39.79	202	239	H
	2400.036	53.09	ADR	32	-44.6	2.01	42.5	68.2	-25.7	-	-	202	239	H
3	* 1440.598	69.69	PK-U	29	-45.9	0	52.79	-	-	74	-21.21	221	139	V
	* 1440.342	49.39	ADR	29	-45.9	2.01	34.5	54	-19.5	-	-	221	139	V
4	2400.148	64.79	PK-U	32	-44.6	0	52.19	-	-	88.2	-36.01	198	205	V
	2400.088	52.65	ADR	32	-44.6	2.01	42.06	68.2	-26.14	-	-	198	205	V
5	13808.422	46.04	PK-U	38.6	-34.5	0	50.14	-	-	88.2	-38.06	229	370	H
	13808.298	34.76	ADR	38.6	-34.5	2.01	40.87	68.2	-27.33	-	-	229	370	H
6	13806.727	62.61	PK-U	38.6	-34.5	0	66.71	-	-	88.2	-21.49	24	165	V
	13806.819	45.5	ADR	38.6	-34.5	2.01	51.61	68.2	-16.59	-	-	24	165	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 996-Tones, RU Index 67

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

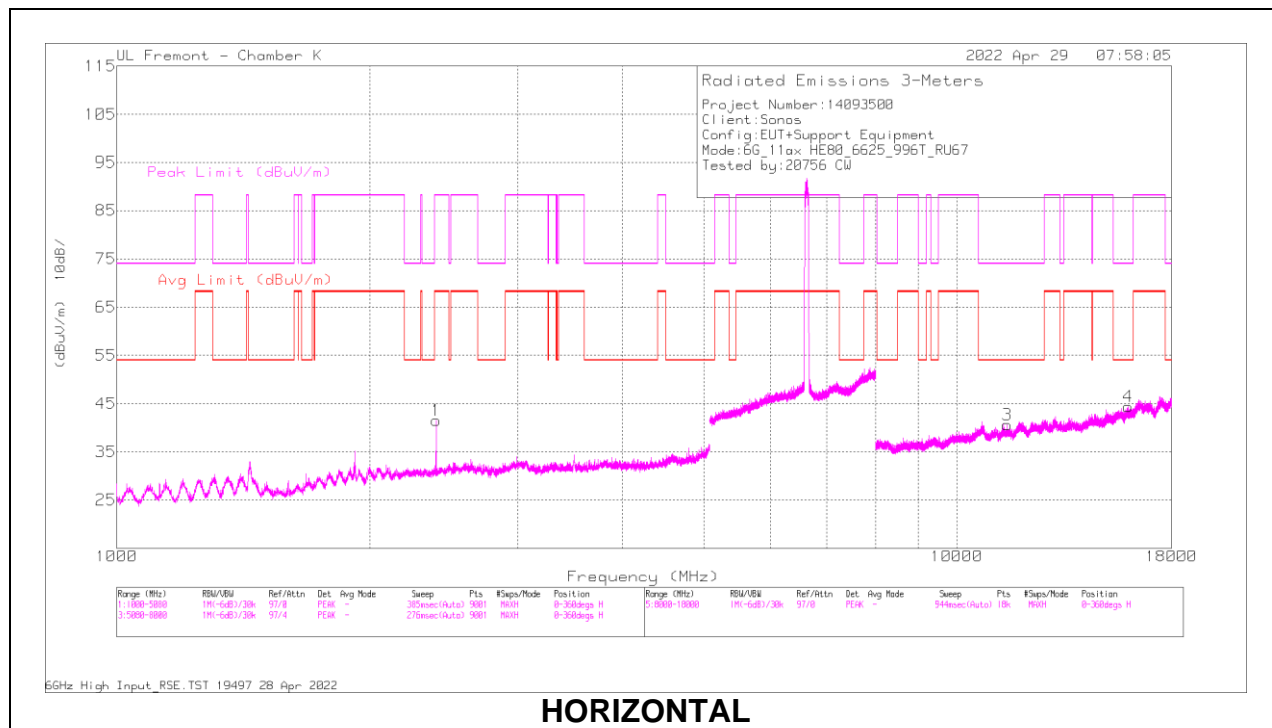

HORIZONTAL

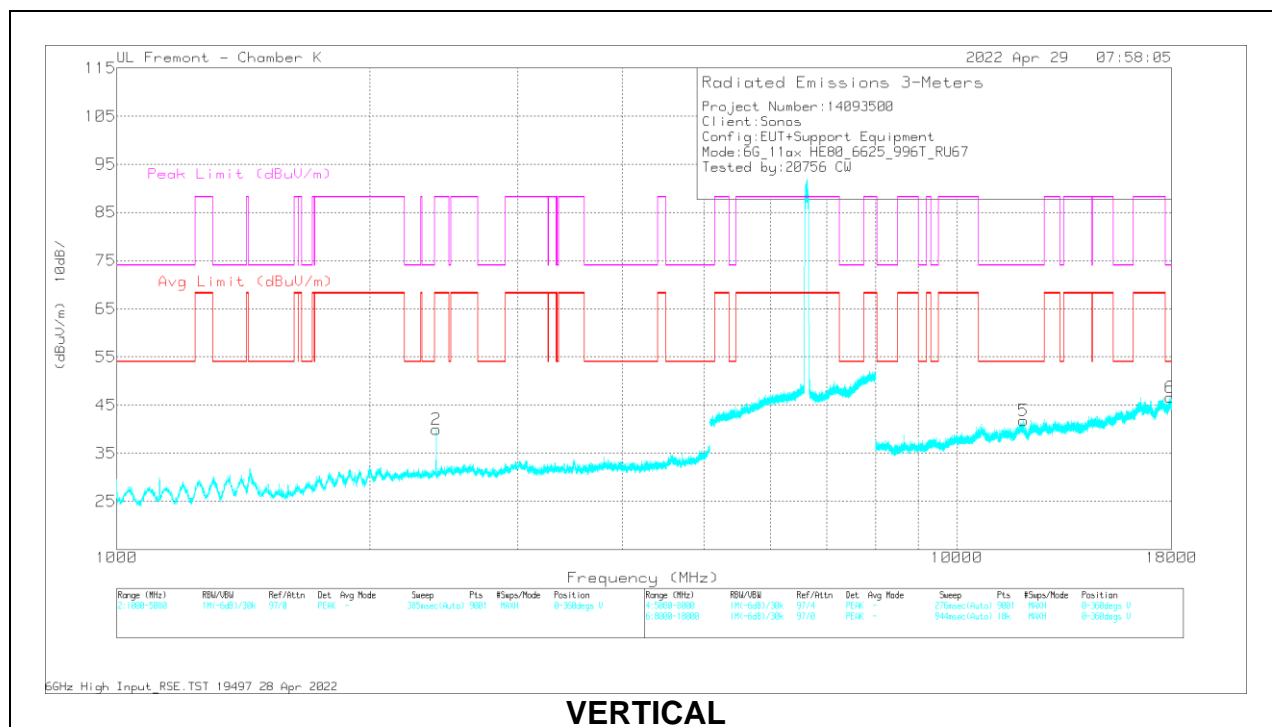

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.356	61.14	PK-U	32	-44.2	0	48.94	-	-	88.2	-39.26	136	226	H
	2400.044	53.82	ADR	32	-44.2	3.32	44.94	68.2	-23.26	-	-	136	226	H
2	2400.088	59.16	PK-U	32	-44.2	0	46.96	-	-	88.2	-41.24	5	99	V
	2400.048	51.5	ADR	32	-44.2	3.32	42.62	68.2	-25.58	-	-	5	99	V
3	* 11483.433	45.21	PK-U	38.3	-34.6	0	48.91	-	-	74	-25.09	264	169	H
	* 11482.886	33.38	ADR	38.3	-34.6	3.32	40.4	54	-13.6	-	-	264	169	H
4	* 15998.843	44.42	PK-U	40.7	-32.4	0	52.72	-	-	74	-21.28	292	377	H
	* 15999.198	32.51	ADR	40.7	-32.4	3.32	44.13	54	-9.87	-	-	292	377	H
5	* 12001.722	44.14	PK-U	38.8	-33	0	49.94	-	-	74	-24.06	352	232	V
	* 12002.965	32.14	ADR	38.8	-32.9	3.32	41.36	54	-12.64	-	-	352	232	V
6	* 17947.672	43.32	PK-U	41.9	-30.3	0	54.92	-	-	74	-19.08	17	124	V
	* 17947.714	31.38	ADR	41.9	-30.3	3.32	46.3	54	-7.7	-	-	17	124	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL

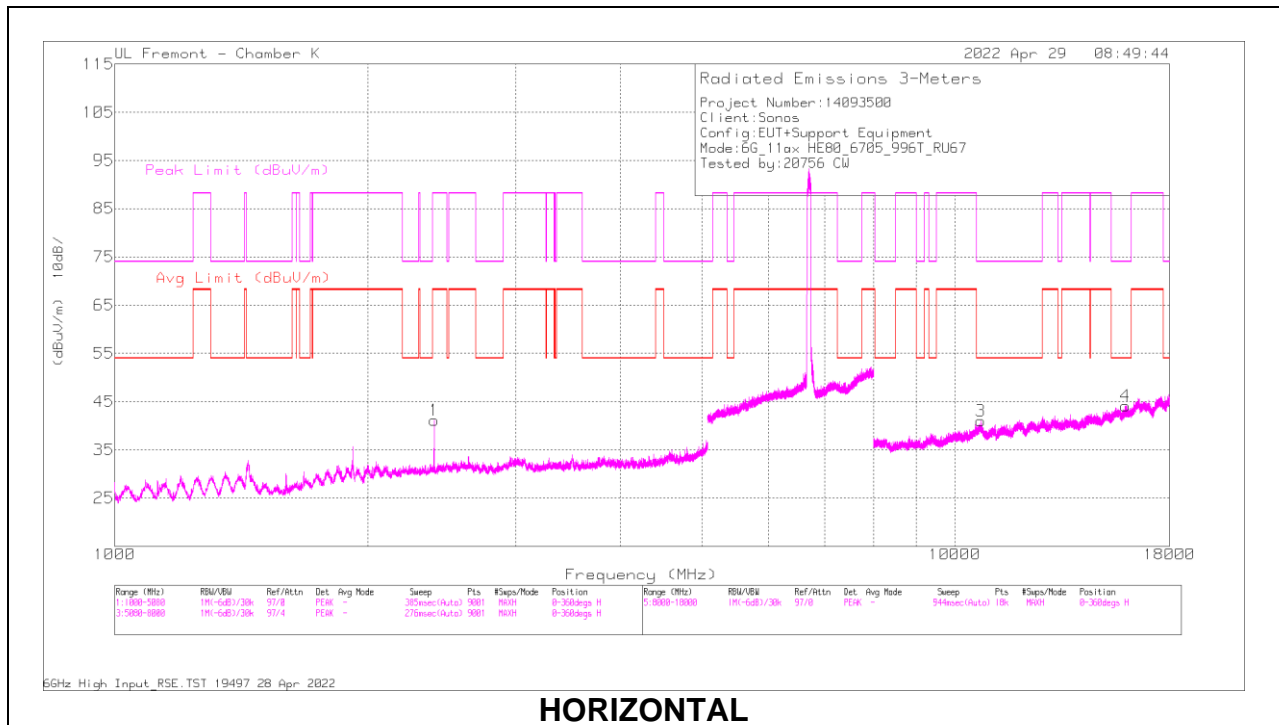

HORIZONTAL

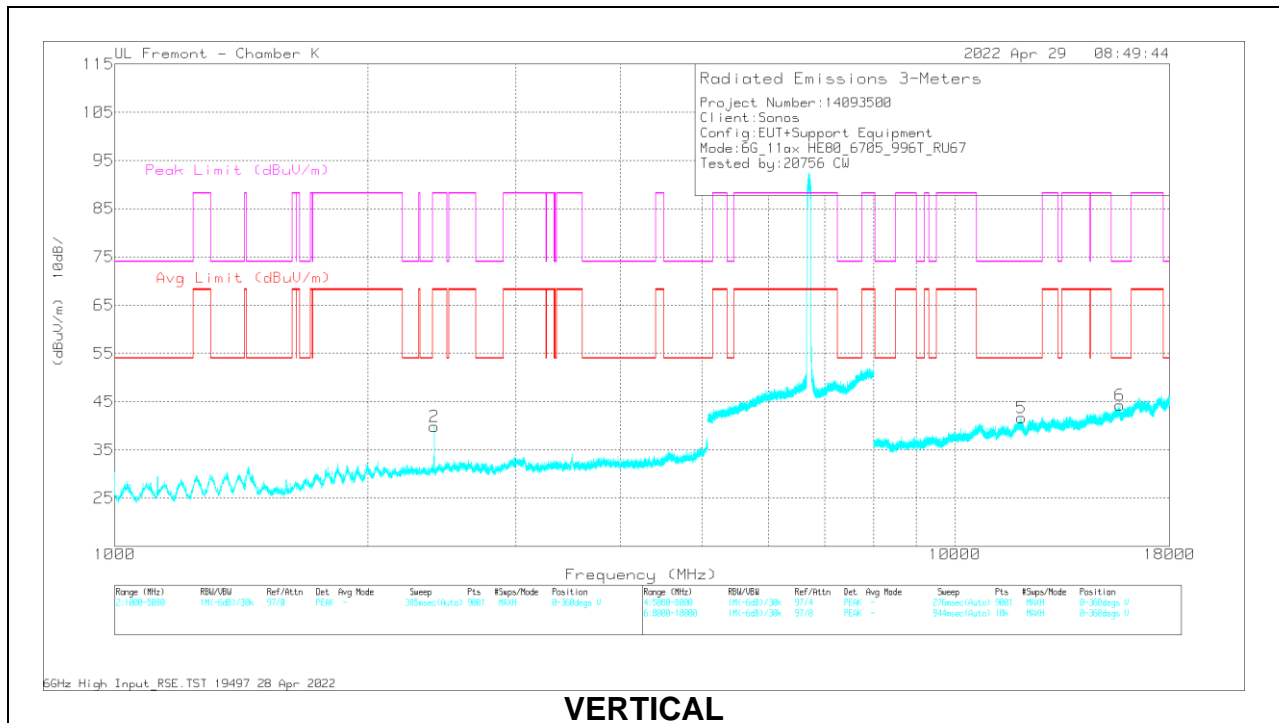

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cb/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2400.008	61.13	PK-U	32	-44.2	0	48.93	-	-	88.2	-39.27	134	199	H
	2400.048	53.61	ADR	32	-44.2	3.32	44.73	68.2	-23.47	-	-	134	199	H
2	2400.032	59.43	PK-U	32	-44.2	0	47.23	-	-	88.2	-40.97	193	144	V
	2400.02	51.91	ADR	32	-44.2	3.32	43.03	68.2	-25.17	-	-	193	144	V
3	* 10726.101	46.36	PK-U	38.2	-35.1	0	49.46	-	-	74	-24.54	193	139	H
	* 10726.257	34.49	ADR	38.1	-35.1	3.32	40.81	54	-13.19	-	-	193	139	H
4	* 15971.068	44.77	PK-U	40.6	-32.3	0	53.07	-	-	74	-20.93	159	223	H
	* 15971.381	32.39	ADR	40.6	-32.3	3.32	44.01	54	-9.99	-	-	159	223	H
5	* 12009.523	43.94	PK-U	38.8	-32.9	0	49.84	-	-	74	-24.16	360	347	V
	* 12009.799	32.19	ADR	38.8	-32.9	3.32	41.41	54	-12.59	-	-	360	347	V
6	* 15706.438	44.06	PK-U	40.6	-32.2	0	52.46	-	-	74	-21.54	305	227	V
	* 15706.172	32.56	ADR	40.6	-32.2	3.32	44.28	54	-9.72	-	-	305	227	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL

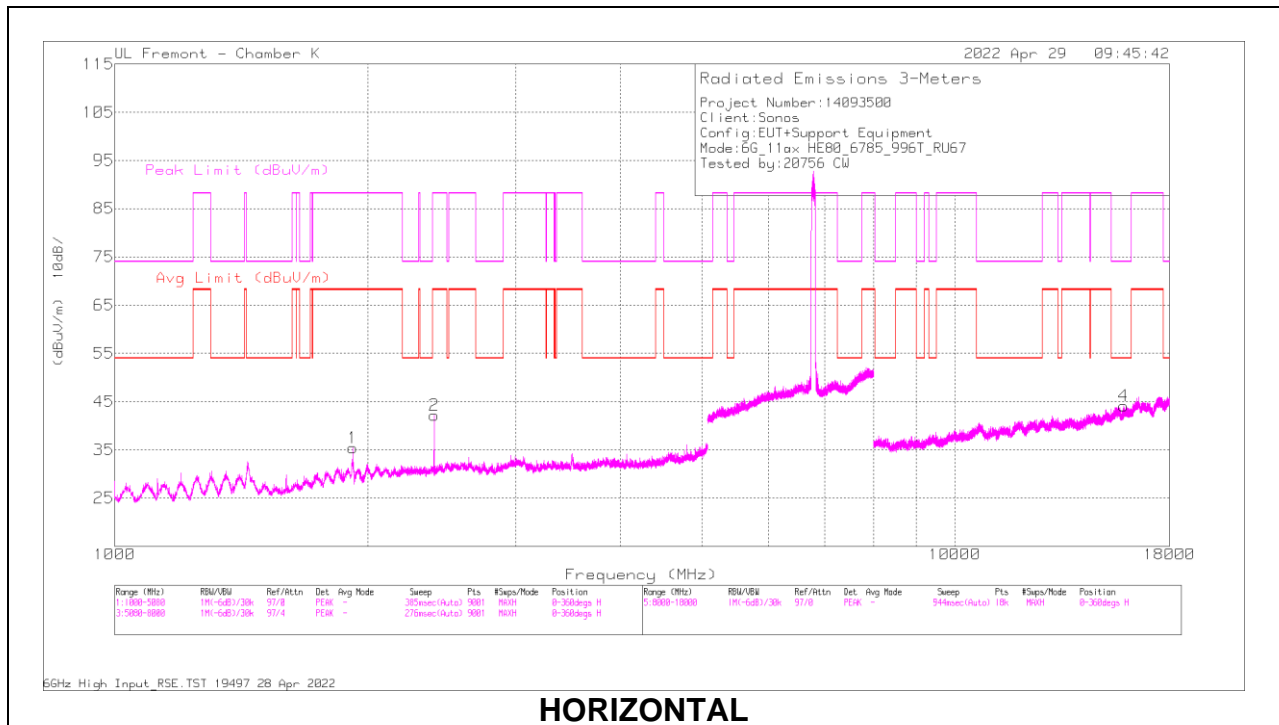

HORIZONTAL

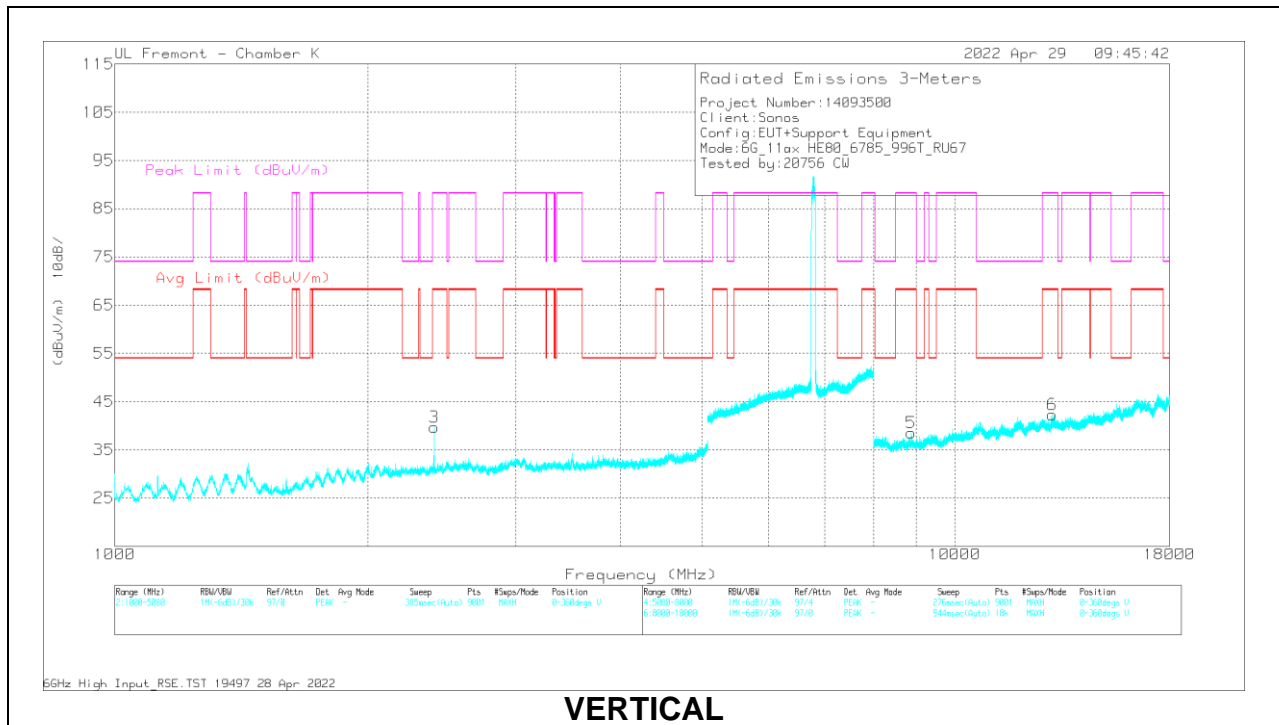

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cbl/Fitr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1919.929	75.65	PK-U	31	-45	0	61.65	-	-	88.2	-26.55	218	201	H
	1919.977	49.4	ADR	31	-45	3.32	38.72	68.2	-29.48	-	-	218	201	H
2	2399.987	62.08	PK-U	32	-44.2	0	49.88	-	-	88.2	-38.32	136	226	H
	2400.02	54.07	ADR	32	-44.2	3.32	45.19	68.2	-23.01	-	-	136	226	H
3	2399.959	63.52	PK-U	32	-44.2	0	51.32	-	-	88.2	-36.88	189	144	V
	2400.091	52.02	ADR	32	-44.2	3.32	43.14	68.2	-25.06	-	-	189	144	V
4	* 15884.267	43.53	PK-U	40.5	-32.4	0	51.63	-	-	74	-22.37	360	174	H
	* 15882.944	32.1	ADR	40.5	-32.4	3.32	43.52	54	-10.48	-	-	360	174	H
5	8877.997	46.18	PK-U	36.2	-35.9	0	46.48	-	-	88.2	-41.72	246	197	V
	8877.538	34.53	ADR	36.2	-35.9	3.32	38.15	68.2	-30.05	-	-	246	197	V
6	13050.459	44.34	PK-U	39.3	-33.2	0	50.44	-	-	88.2	-37.76	18	196	V
	13050.448	32.65	ADR	39.3	-33.2	3.32	42.07	68.2	-26.13	-	-	18	196	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STRADDLE CHANNEL

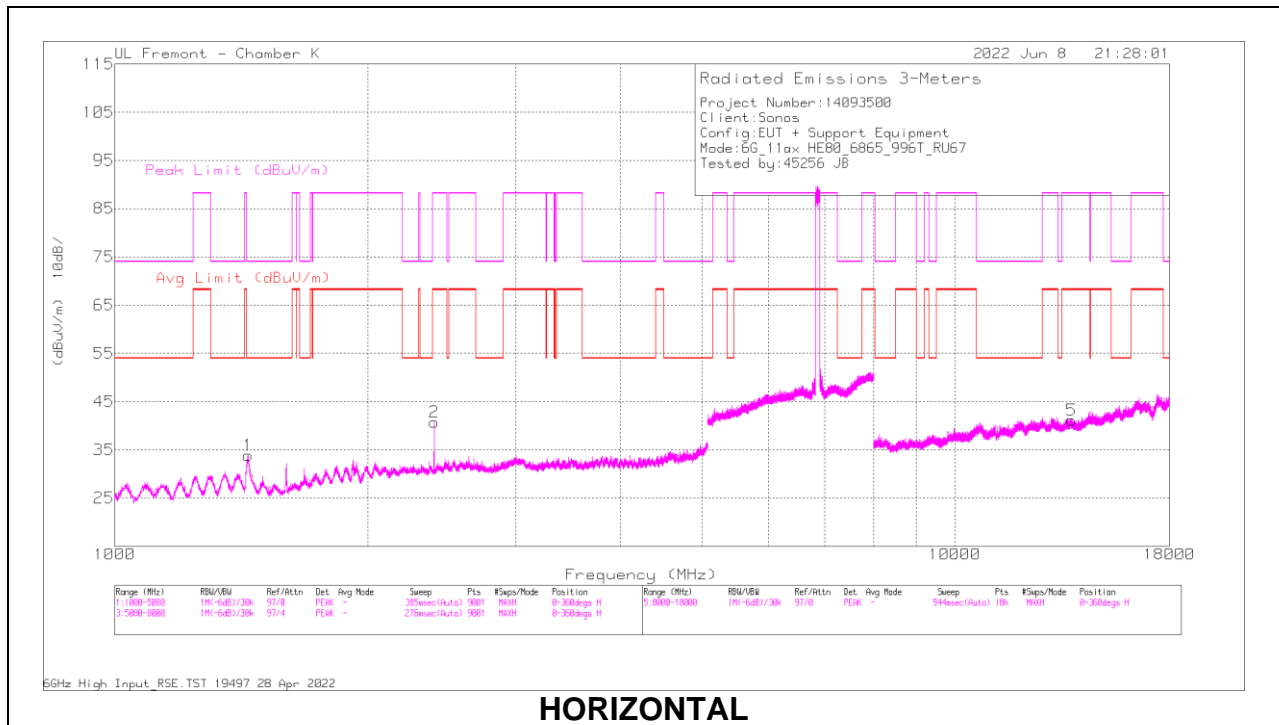

HORIZONTAL

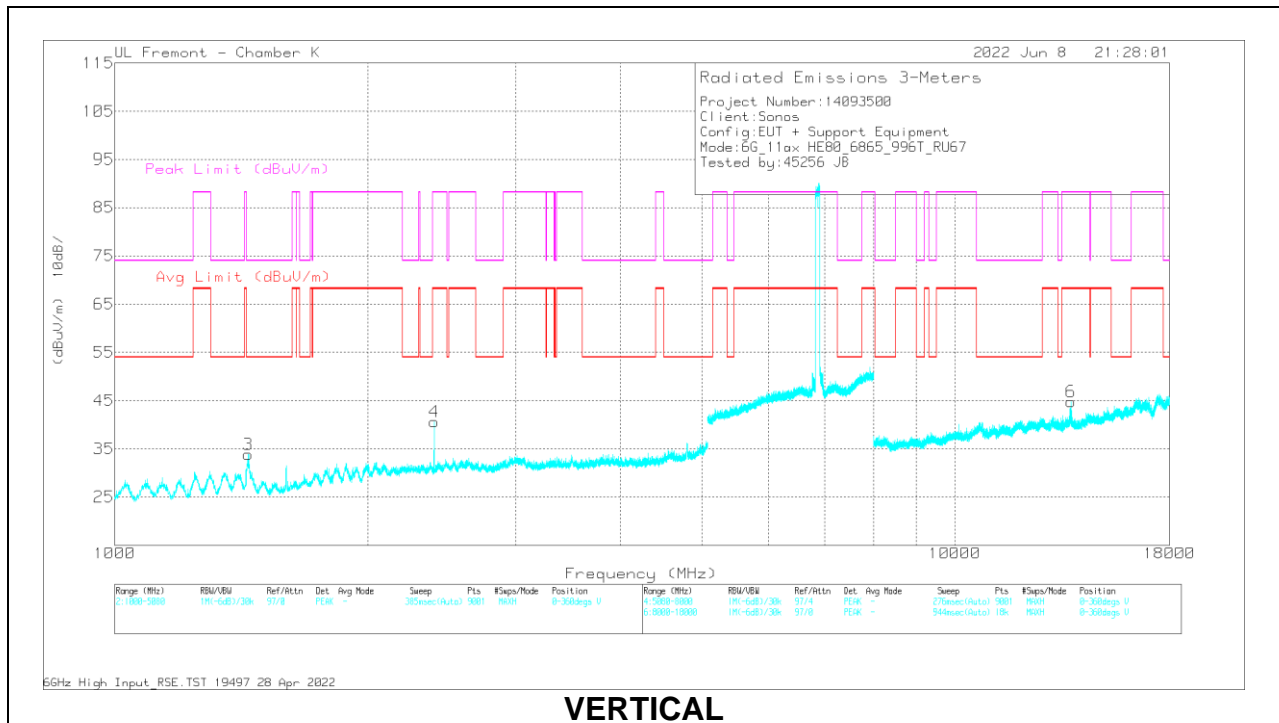

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 80404 (dB/m)	Amp/Cbl/Filtr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1440.483	70.79	PK-U	29	-45.9	0	53.89	-	-	74	-20.11	163	168	H
	* 1441.003	50.48	ADR	29	-45.9	3.32	36.9	54	-17.1	-	-	163	168	H
2	2400.124	60.78	PK-U	32	-44.6	0	48.18	-	-	88.2	-40.02	242	381	H
	2399.996	48.08	ADR	32	-44.6	3.32	38.8	68.2	-29.4	-	-	242	381	H
3	* 1439.954	83.19	PK-U	29	-46	0	66.19	-	-	74	-7.81	208	140	V
	* 1439.726	50.01	ADR	29	-46	3.32	36.33	54	-17.67	-	-	208	140	V
4	2400.084	61.36	PK-U	32	-44.6	0	48.76	-	-	88.2	-39.44	195	173	V
	2400.12	53.36	ADR	32	-44.6	3.32	44.08	68.2	-24.12	-	-	195	173	V
5	13777.092	45.47	PK-U	38.6	-34.3	0	49.77	-	-	88.2	-38.43	342	202	H
	13774.826	34.21	ADR	38.6	-34.4	3.32	41.73	68.2	-26.47	-	-	342	202	H
6	13735.232	48.68	PK-U	38.6	-34.2	0	53.08	-	-	88.2	-35.12	26	126	V
	13734.933	35.12	ADR	38.6	-34.2	3.32	42.84	68.2	-25.36	-	-	26	126	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.10. TX ABOVE 1 GHz 802.11ax HE20 MODE IN THE UNII-8 BAND


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 0

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

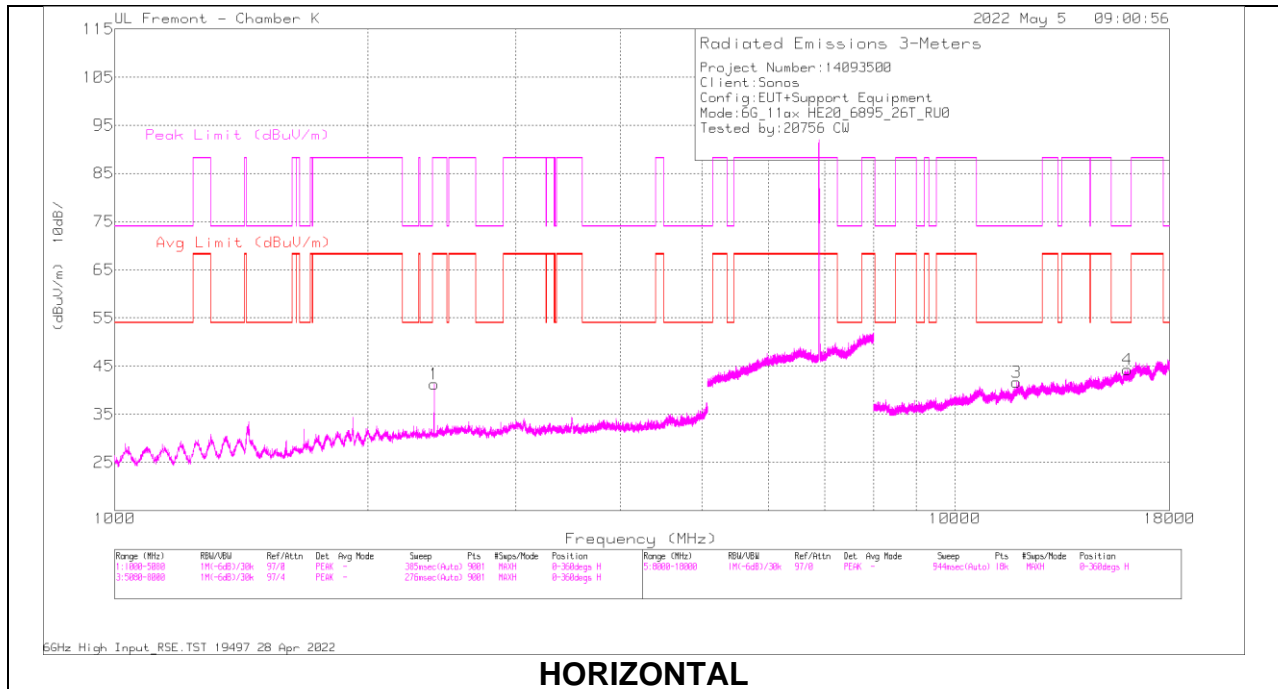

HORIZONTAL

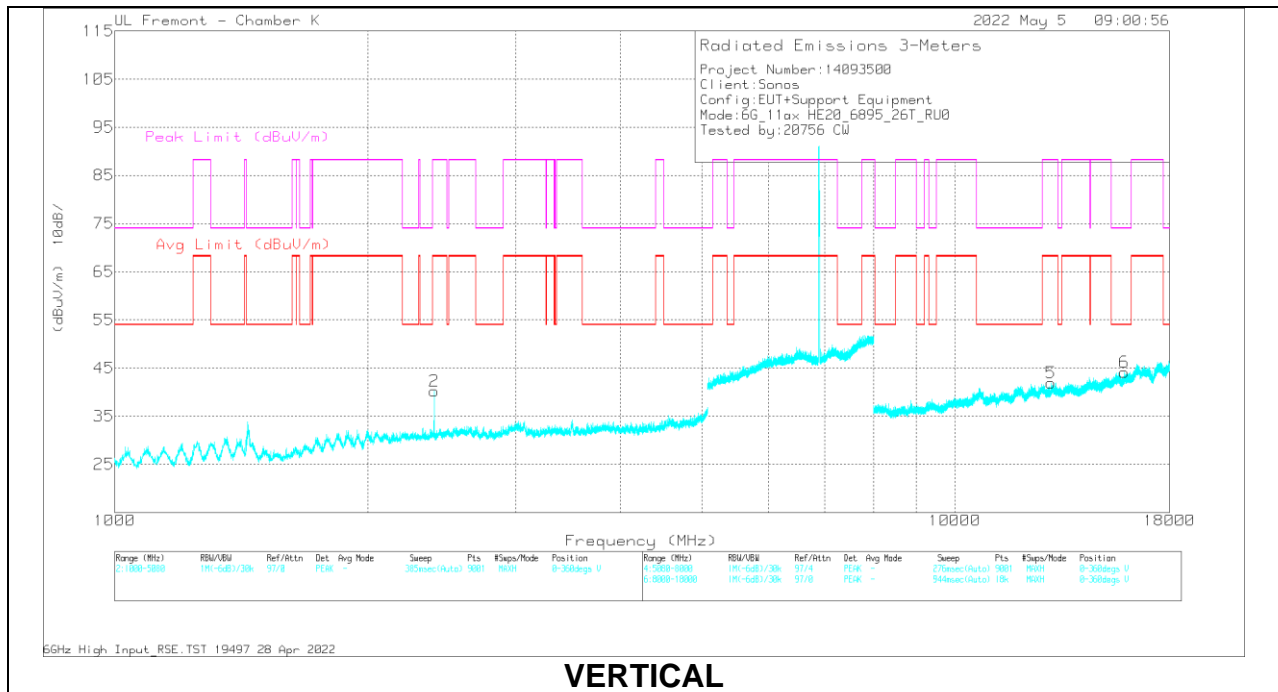

VERTICAL