

Antenna Test Report

April 15th, 2023

FCC ID:	SBVRM044
IC:	5373A-RM044
Model:	S44
Product Description:	802.11 a/b/g/n/ac/ax 2x2 Client Device with BT and BLE

Table of Context:

1. Measurement Method	3
2. Test location	13
3. Test Equipment list	14

1. Measurement Method

Antenna Measurements in Anechoic Chambers

The influence of atmospheric conditions and surrounding objects are non-ideal for accurate antenna measurements. An anechoic chamber offers a non-reflective, no-echo room for performing the antenna measurements. The anechoic chamber can simulate outer space, which is the most ideal location for antenna measurements. All gain measurements were performed in accordance with IEEE Std. 149 (IEEE Standard Procedures for Antenna Measurements). Losses of any test cables were calibrated out post-measurement. Please refer to Figure 1 as the measurement chamber diagram

1. Perform chamber calibration using reference antennas.
2. Center the EUT in the chamber using the laser alignment system.
3. Connect the antenna micro-coax cable to the mast cable.
4. Capture antenna gain pattern using the automated measurement software.
5. Export the measurement data.
6. De-embed any additional cable losses in the setup (i.e., losses of any test cables that are not present in the actual product assembly).
7. Post-process the measured data to extract the peak gain.

Antenna peak gain values for S44 are shown below:


Wi-Fi Antennas:



Frequency (MHz)	CH0				CH1			
	ANT1 (dBi)	Polarization	ANT3 (dBi)	Polarization	ANT2 (dBi)	Polarization	ANT4 (dBi)	Polarization
2400-2483.5	3.0	V	2.0	V	1.9	V	2.5	V
5180-5240	2.3	V	2.6	V	2.7	V	2.6	V
5260-5320	2.8	V	2.4	V	3.3	V	2.5	V
5500-5700	2.2	V	2.9	V	3.4	V	3.3	V
5725-5850	2.1	V	2.2	V	2.5	V	3.0	V
5925-6425	4.6	V	3.9	V	3.3	V	4.1	V
6425-6525	3.3	V	4.2	V	2.4	V	3.5	V
6525-6875	3.5	V	5.5	V	2.4	V	3.8	V
6875-7125	3.9	V	5.3	V	1.8	V	3.2	V

BT and BLE antenna:

Frequency (MHz)	ANT (dBi)	Polarization
2400-2483.5	1.8	None

Antenna Pattern Plots for S44 are shown below:

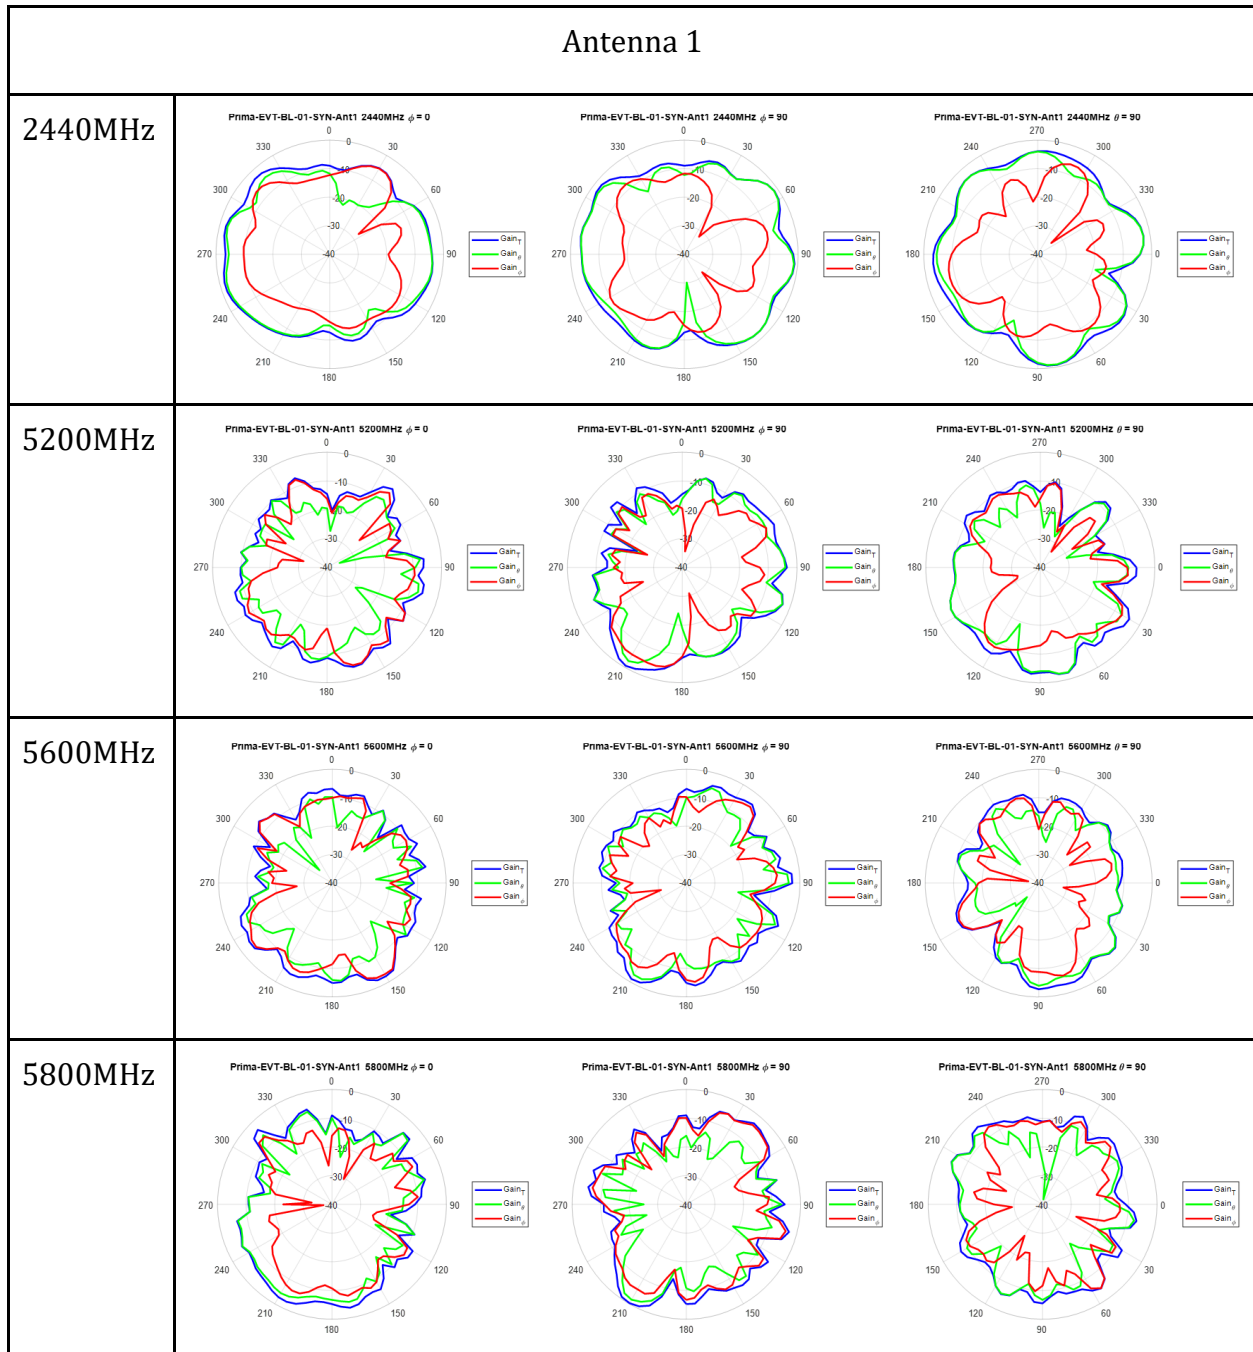


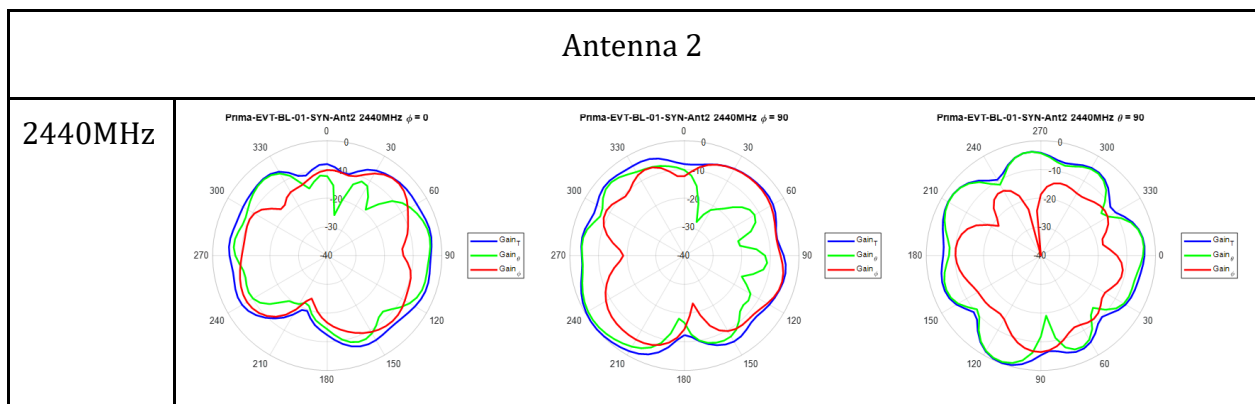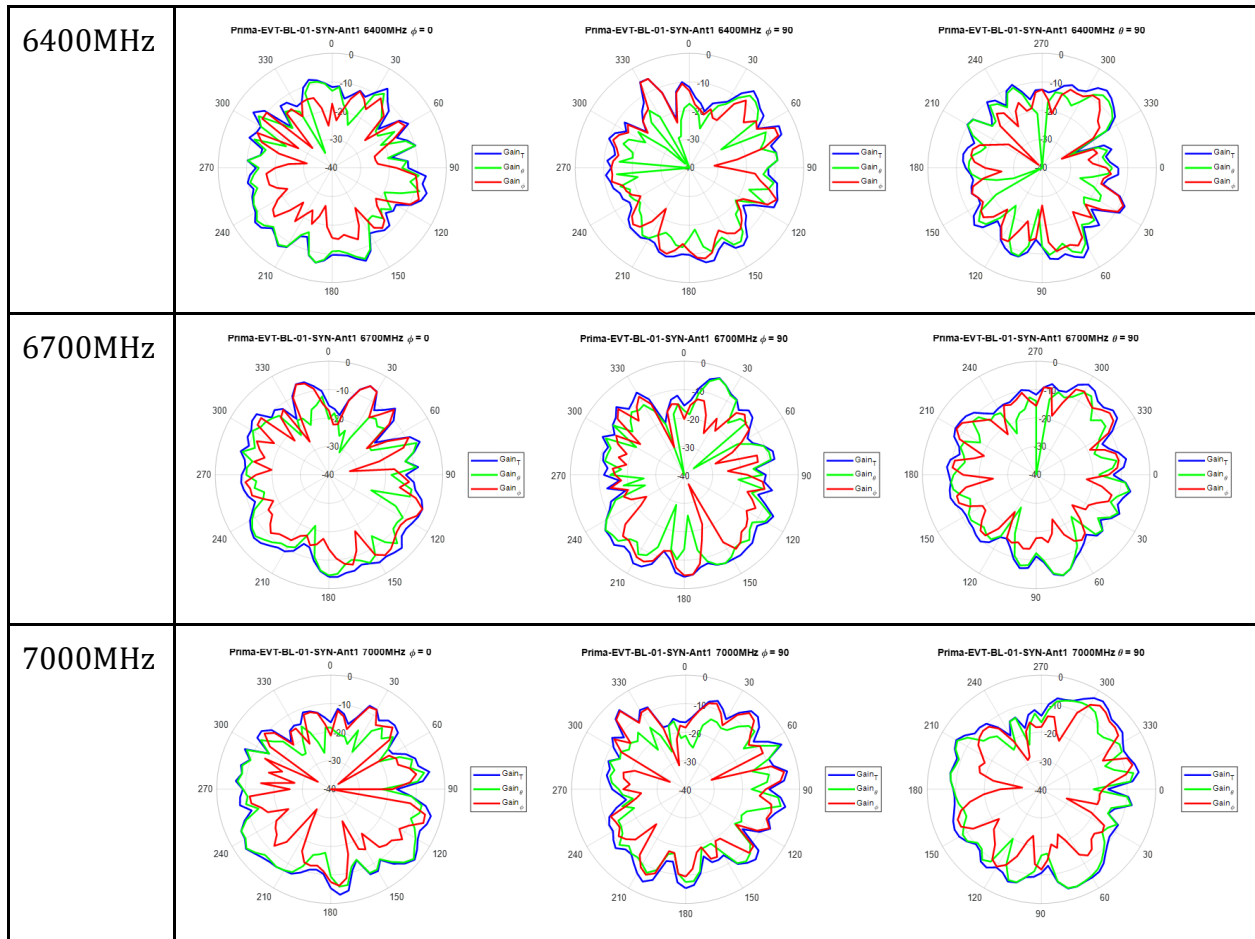


SONOS




Model: S44

FCC ID: SBVRM044, IC: 5373A-RM044

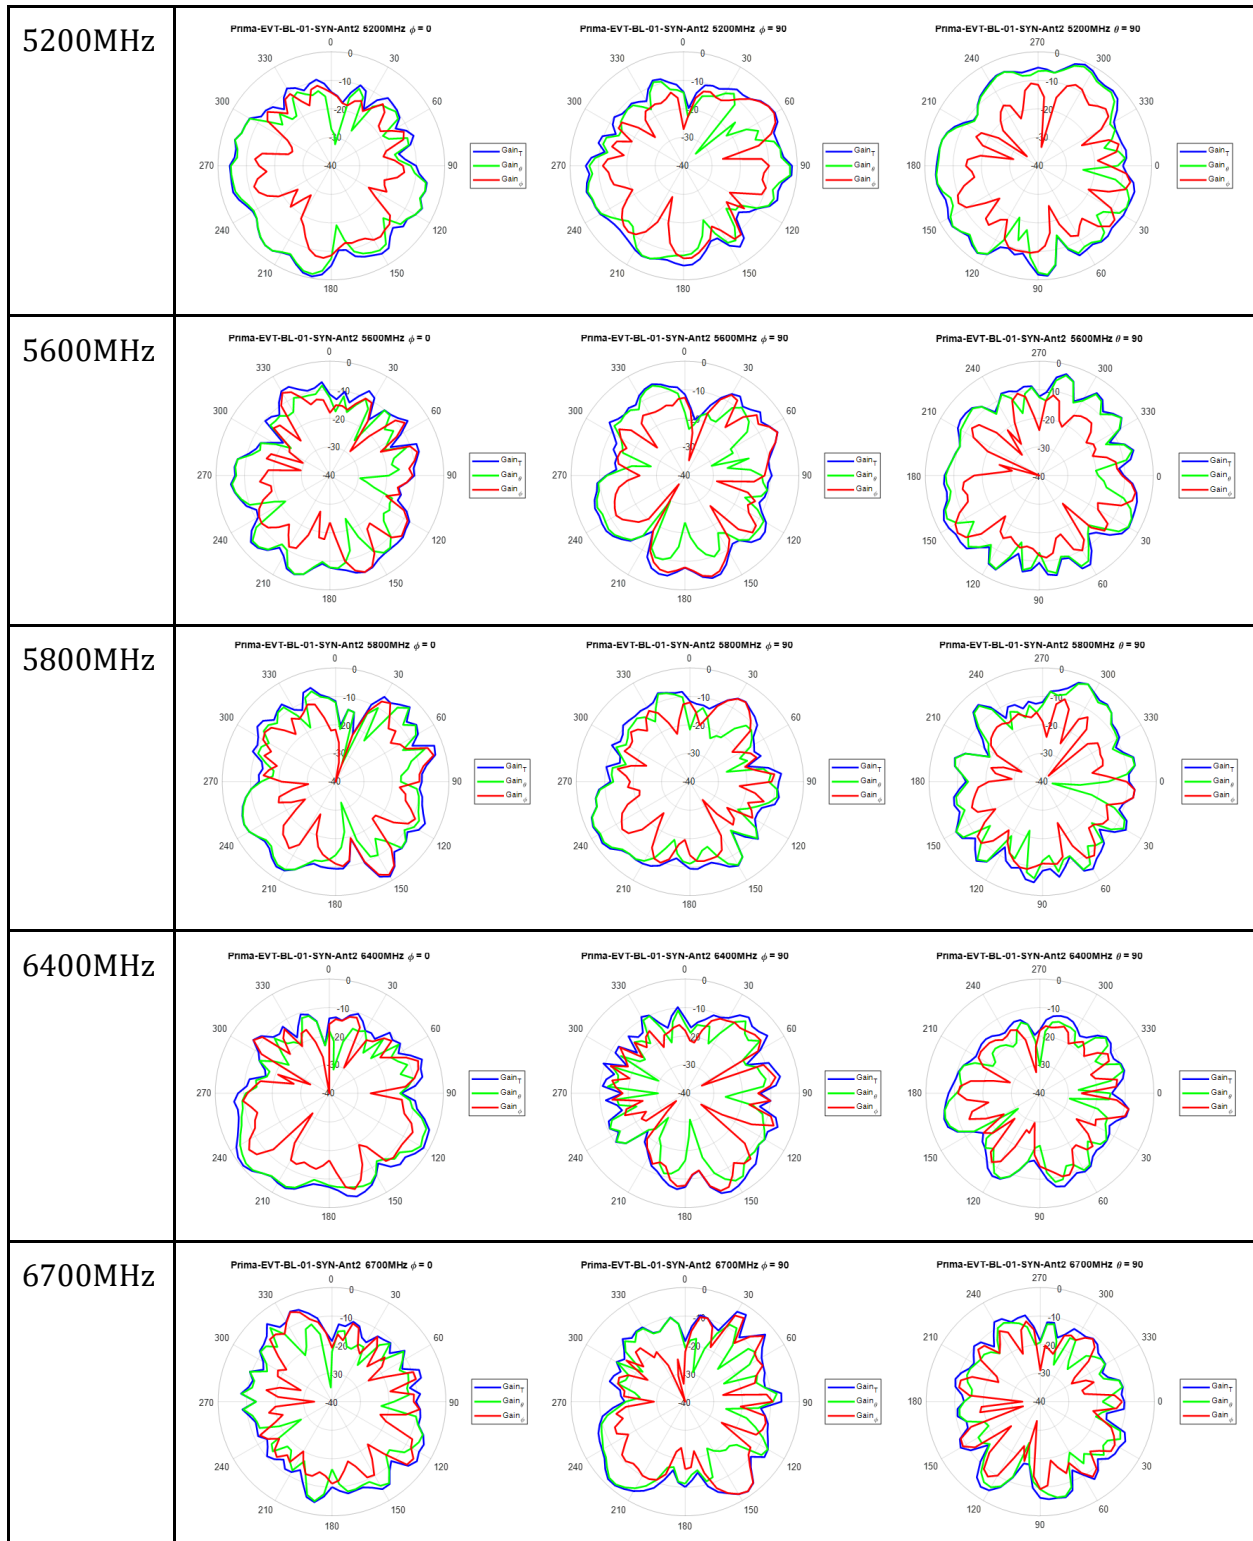

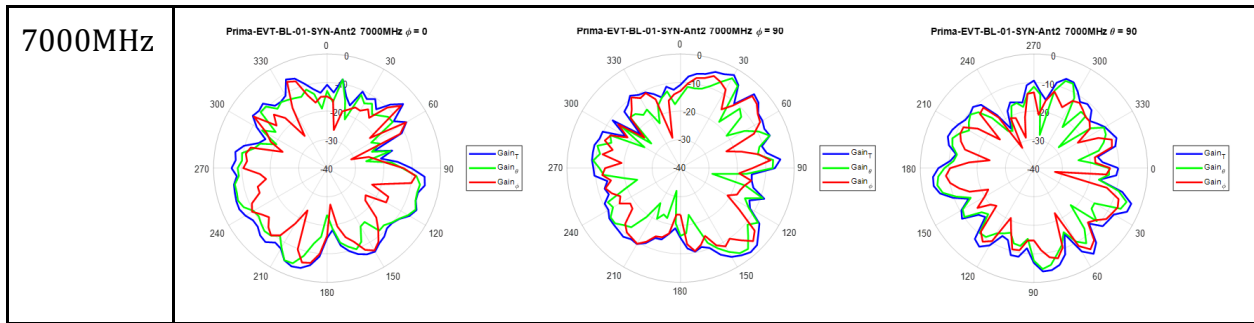


Antenna 3

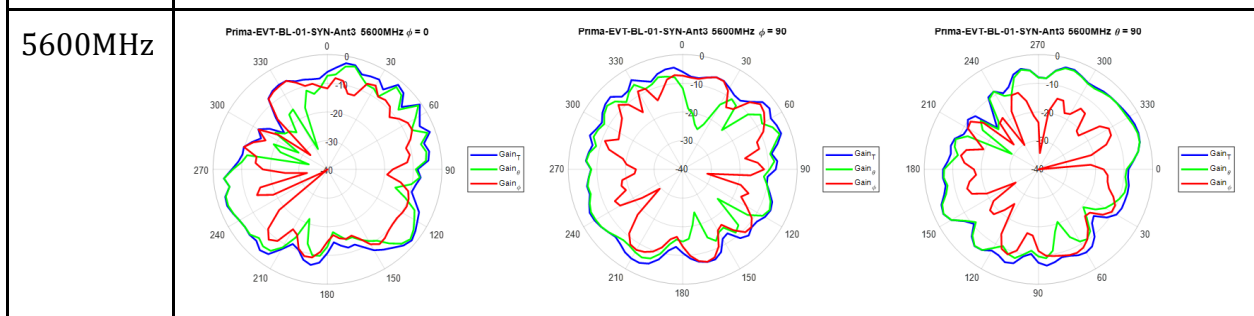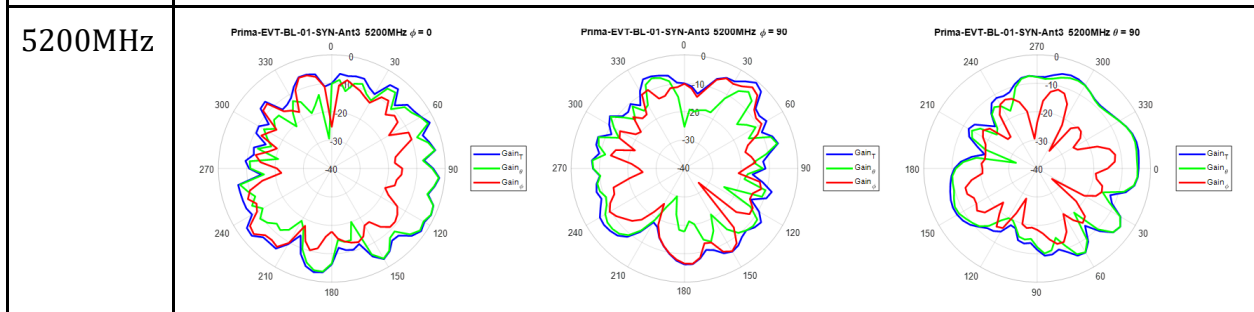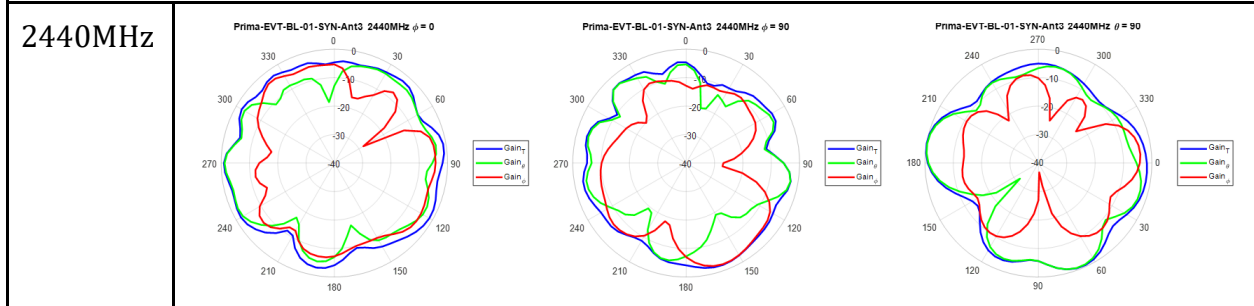


SONOS



Model: S44

FCC ID: SBVRM044, IC: 5373A-RM044

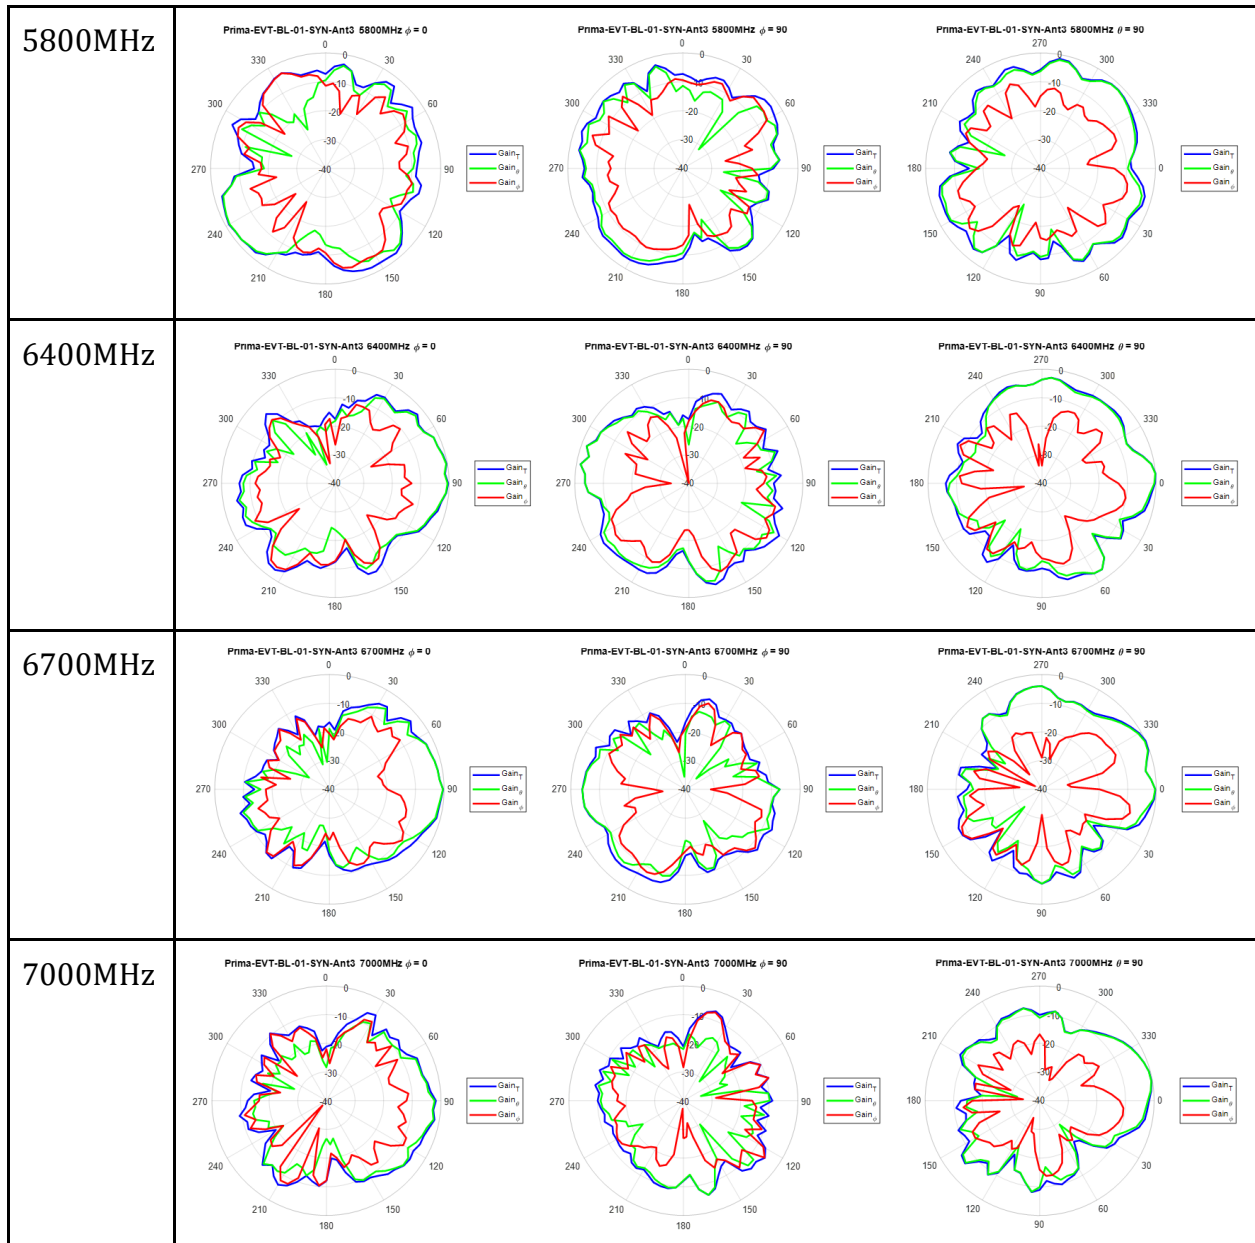

Antenna 4

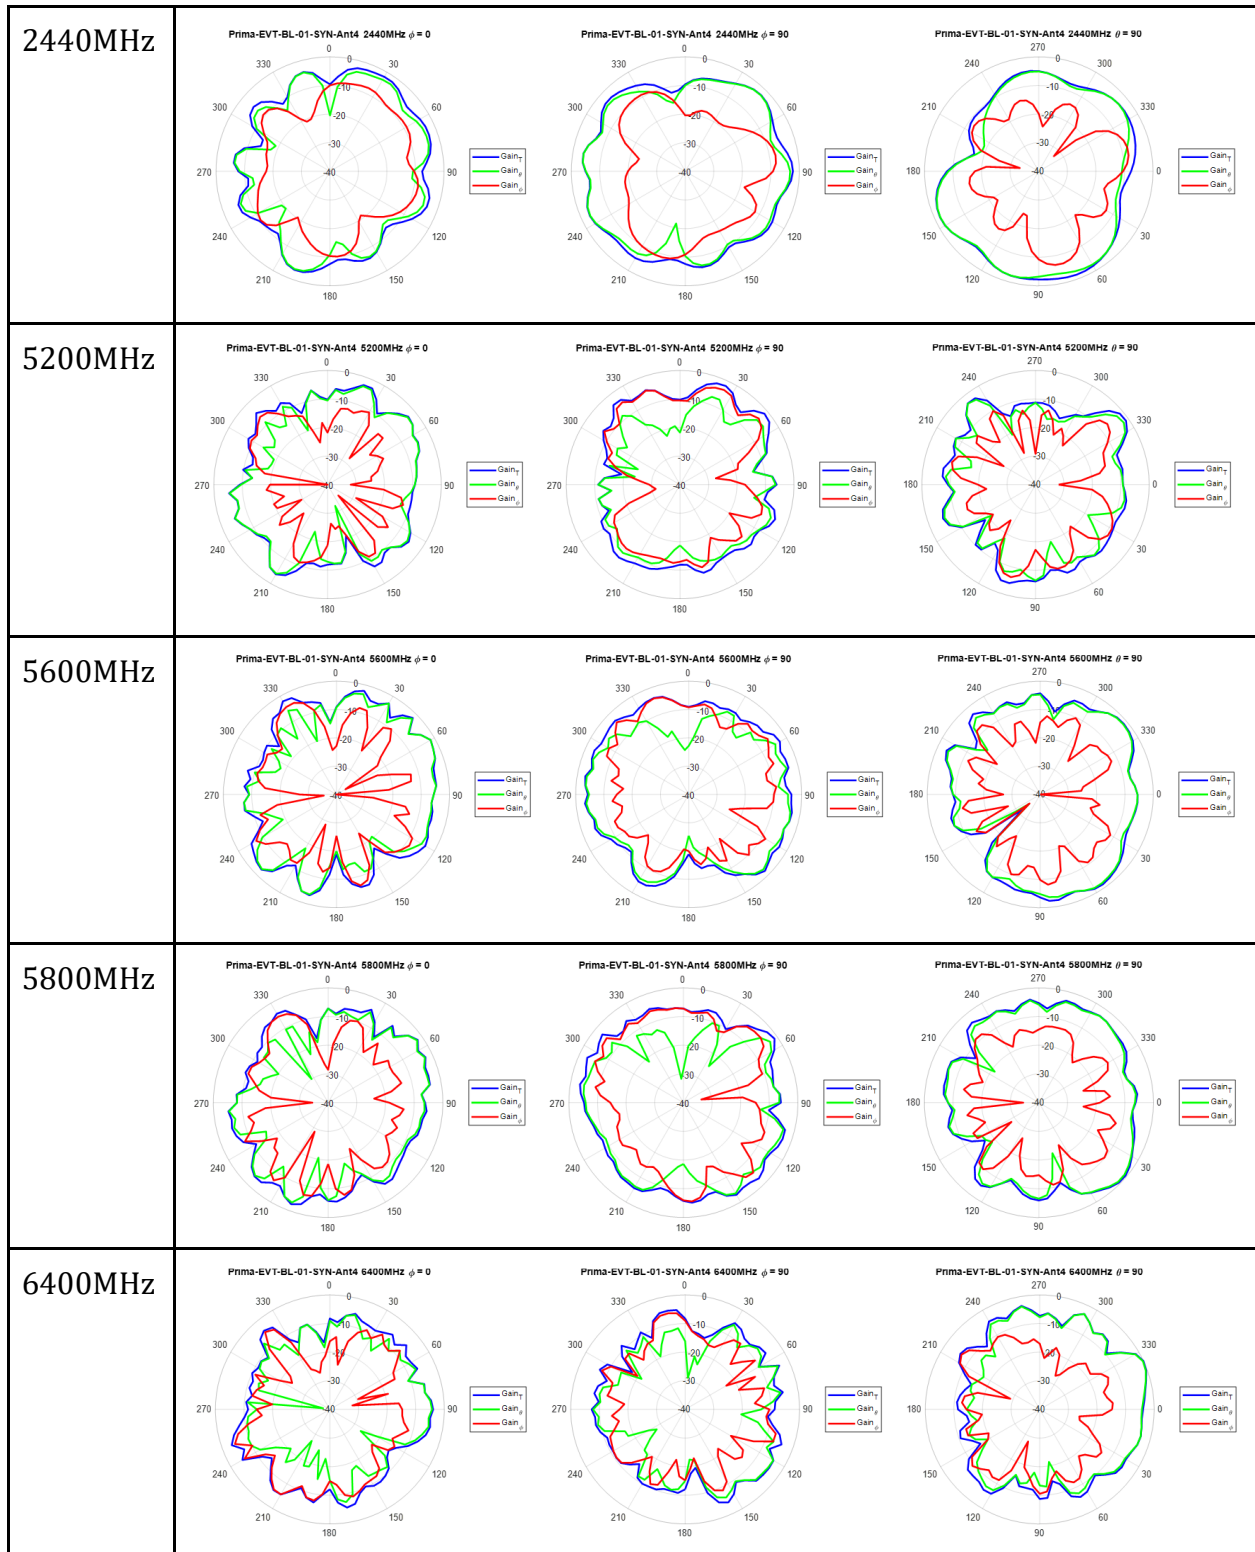

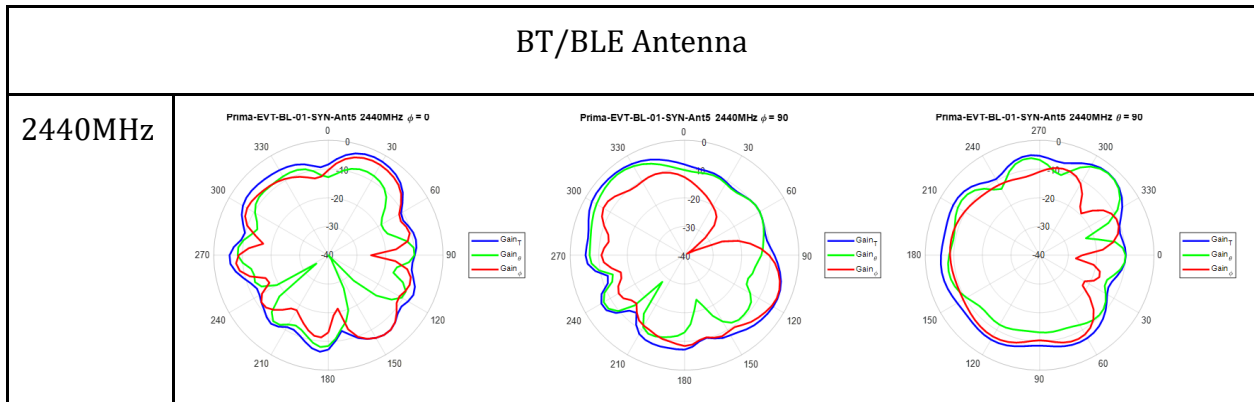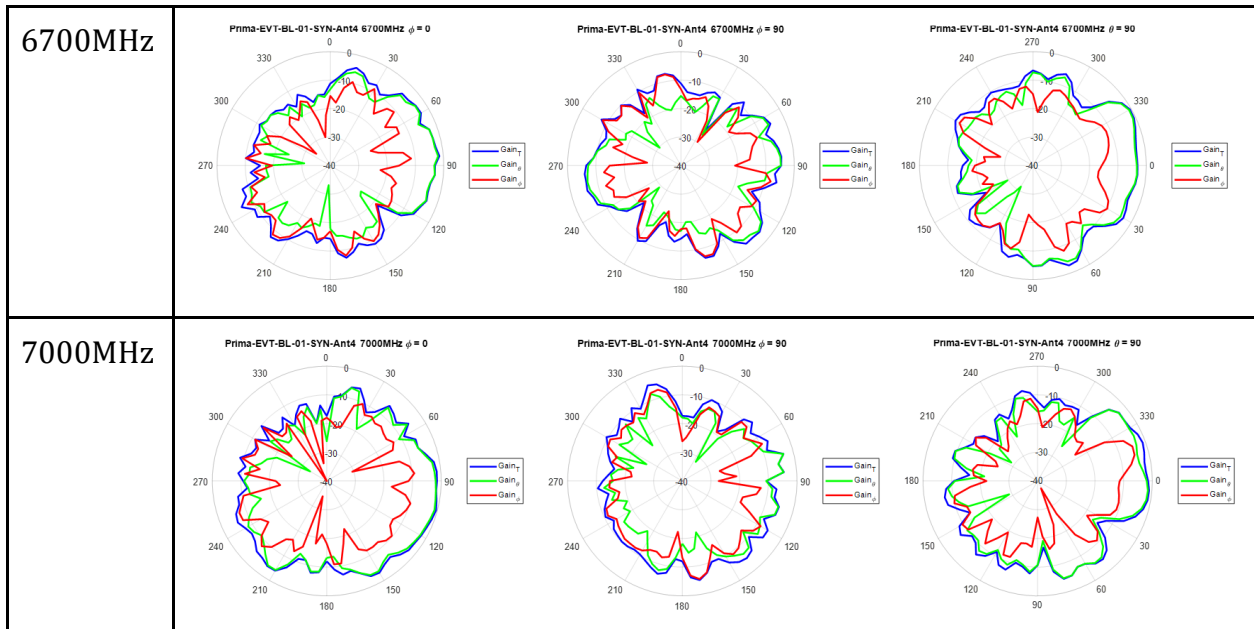

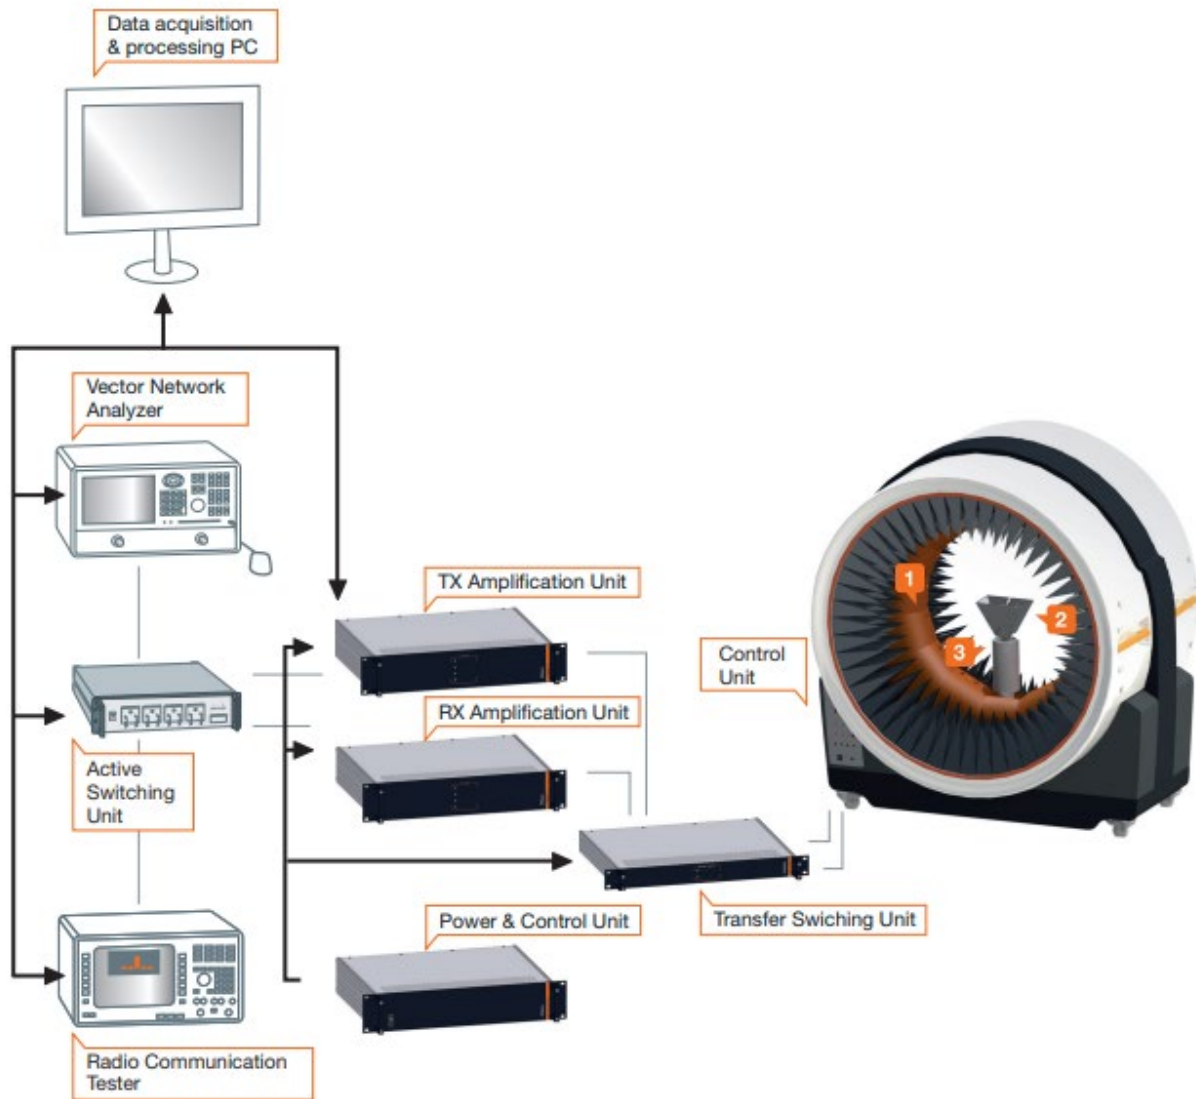


Figure 1. Measurement Chamber Diagram

2. Test location

Sonos Antenna Chamber

Peak Gain was measured using the Chamber. The antenna was measured in the full product assembly. Please see Figure 2. as a demonstration of EUT in the test chamber.

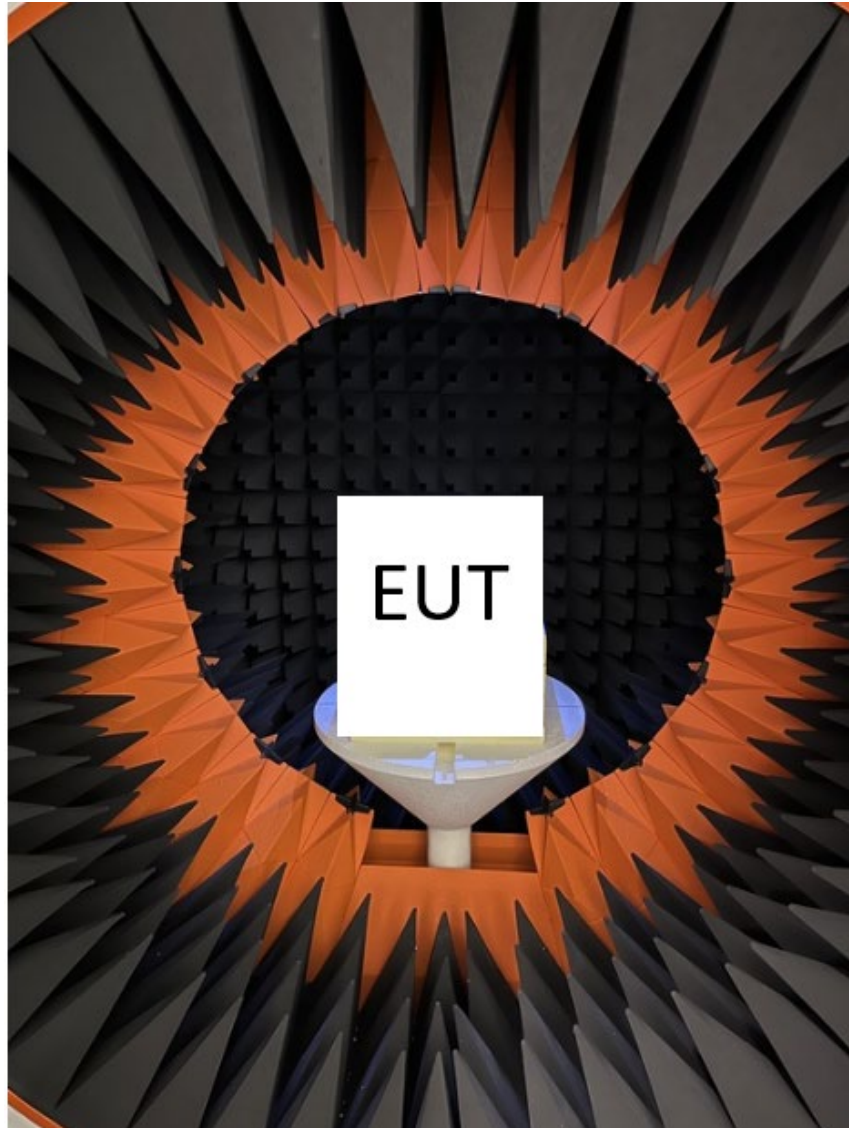


Figure 2. EUT in the test chamber.

3. **Test Equipment list**

Description	Manufacturer	ID number
Antenna measurement system	MVG	Sonos 02

The chamber is calibrated annually by the vendor.