

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cbl/Filtr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 10849.267	47.88	PK-U	38	-36.4	0	49.48	-	-	74	-24.52	37	370	H
	* 10847.246	36.06	ADR	38	-36.2	4.24	42.1	54	-11.9	-	-	37	370	H
2	* 11997.115	47.69	PK-U	38.6	-34.2	0	52.09	-	-	74	-21.91	65	233	H
	* 11997.373	35.32	ADR	38.6	-34.2	4.24	43.96	54	-10.04	-	-	65	233	H
3	* 15875.845	47.32	PK-U	40.2	-33.1	0	54.42	-	-	74	-19.58	325	171	H
	* 15875.734	35.19	ADR	40.2	-33.1	4.24	46.53	54	-7.47	-	-	325	171	H
4	* 11152.844	48.4	PK-U	38	-35.4	0	51	-	-	74	-23	135	187	V
	* 11153.123	36.64	ADR	38	-35.4	4.24	43.48	54	-10.52	-	-	135	187	V
5	* 12036.278	47.01	PK-U	38.7	-34.2	0	51.51	-	-	74	-22.49	176	123	V
	* 12036.225	34.85	ADR	38.7	-34.2	4.24	43.59	54	-10.41	-	-	176	123	V
6	* 15869.74	47.35	PK-U	40.2	-33.1	0	54.45	-	-	74	-19.55	187	219	V
	* 15869.893	35.23	ADR	40.2	-33.1	4.24	46.57	54	-7.43	-	-	187	219	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL

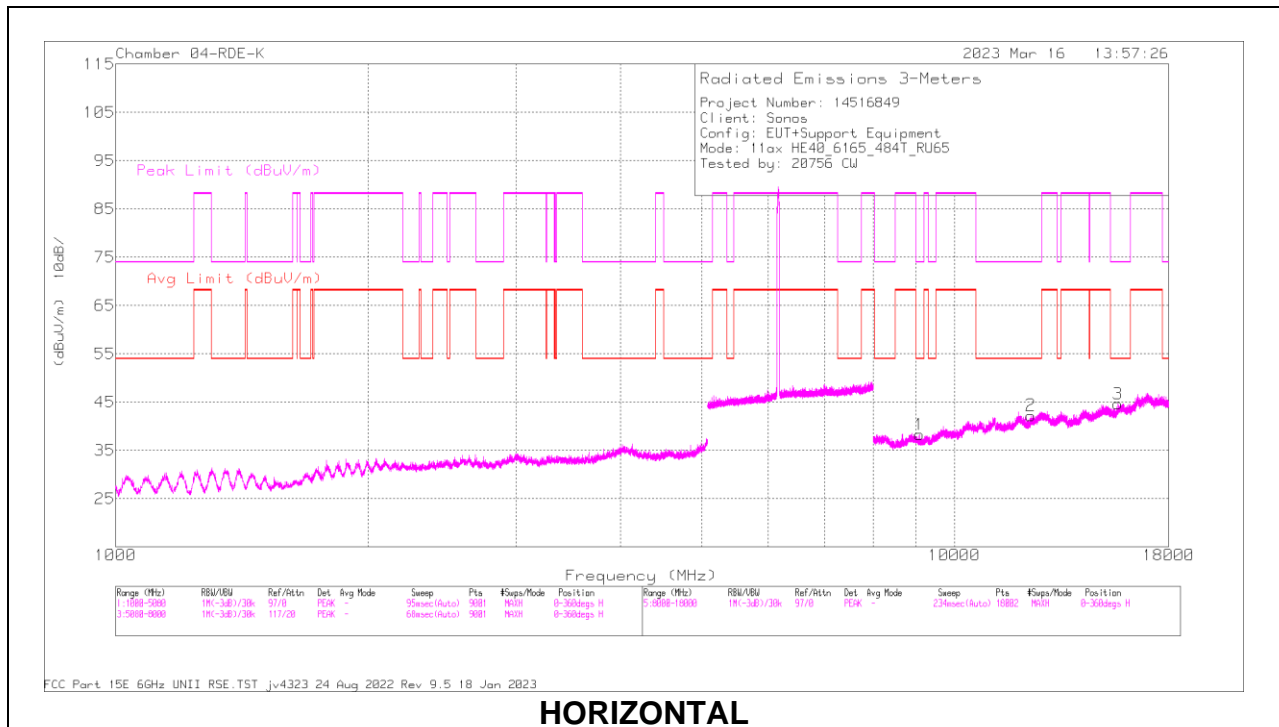

HORIZONTAL

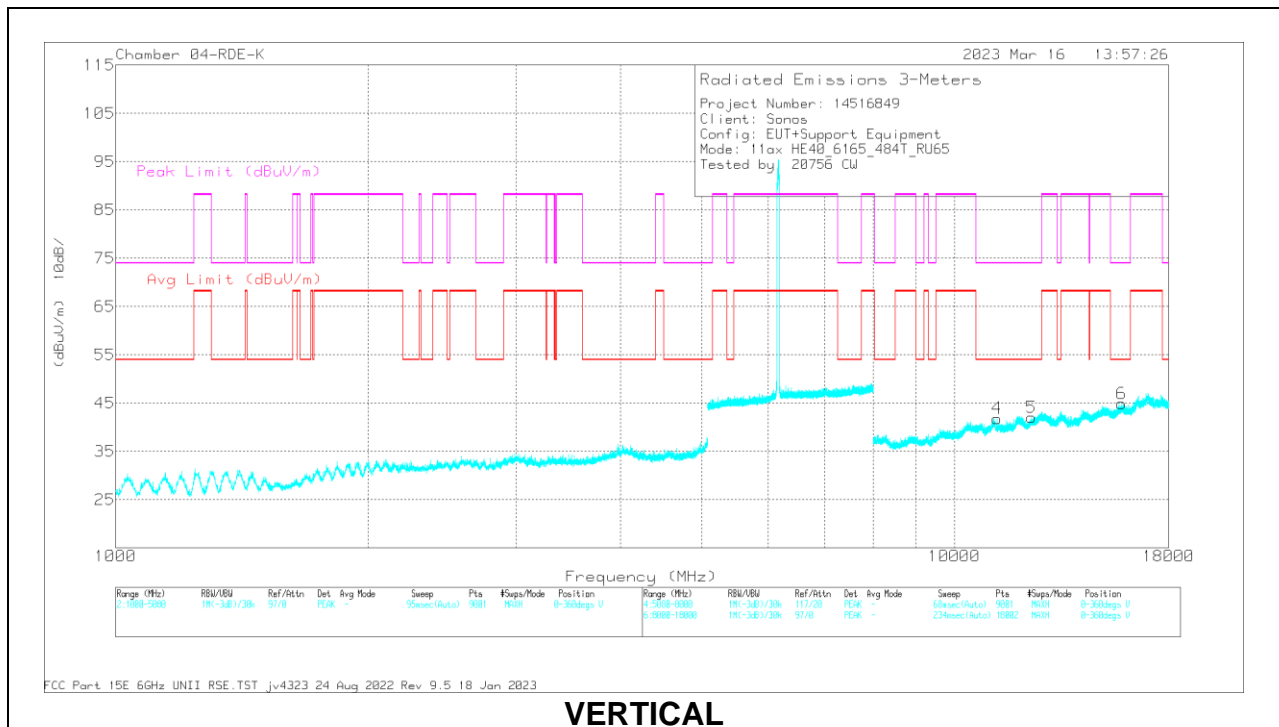

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cbl/Fitr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 9078.087	47.6	PK-U	36.2	-36.6	0	47.2	-	-	74	-26.8	25	147	H
	* 9077.297	35.65	ADR	36.2	-36.6	4.24	39.49	54	-14.51	-	-	25	147	H
2	* 12337.62	46.71	PK-U	39	-34.4	0	51.31	-	-	74	-22.69	265	251	H
	* 12337.533	34.43	ADR	39	-34.4	4.24	43.27	54	-10.73	-	-	265	251	H
3	* 15659.012	46.91	PK-U	40.1	-33.5	0	53.51	-	-	74	-20.49	250	187	H
	* 15659.264	34.96	ADR	40.1	-33.5	4.24	45.8	54	-8.2	-	-	250	187	H
4	* 11242.48	47.68	PK-U	37.9	-35.6	0	49.98	-	-	74	-24.02	161	183	V
	* 11241.269	36.04	ADR	37.9	-35.6	4.24	42.58	54	-11.42	-	-	161	183	V
5	* 12358.768	46.52	PK-U	39	-34.4	0	51.12	-	-	74	-22.88	321	239	V
	* 12358.714	34.41	ADR	39	-34.4	4.24	43.25	54	-10.75	-	-	321	239	V
6	* 15819.541	47.36	PK-U	40.2	-33.4	0	54.16	-	-	74	-19.84	19	133	V
	* 15819.763	35.58	ADR	40.2	-33.4	4.24	46.62	54	-7.38	-	-	19	133	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL

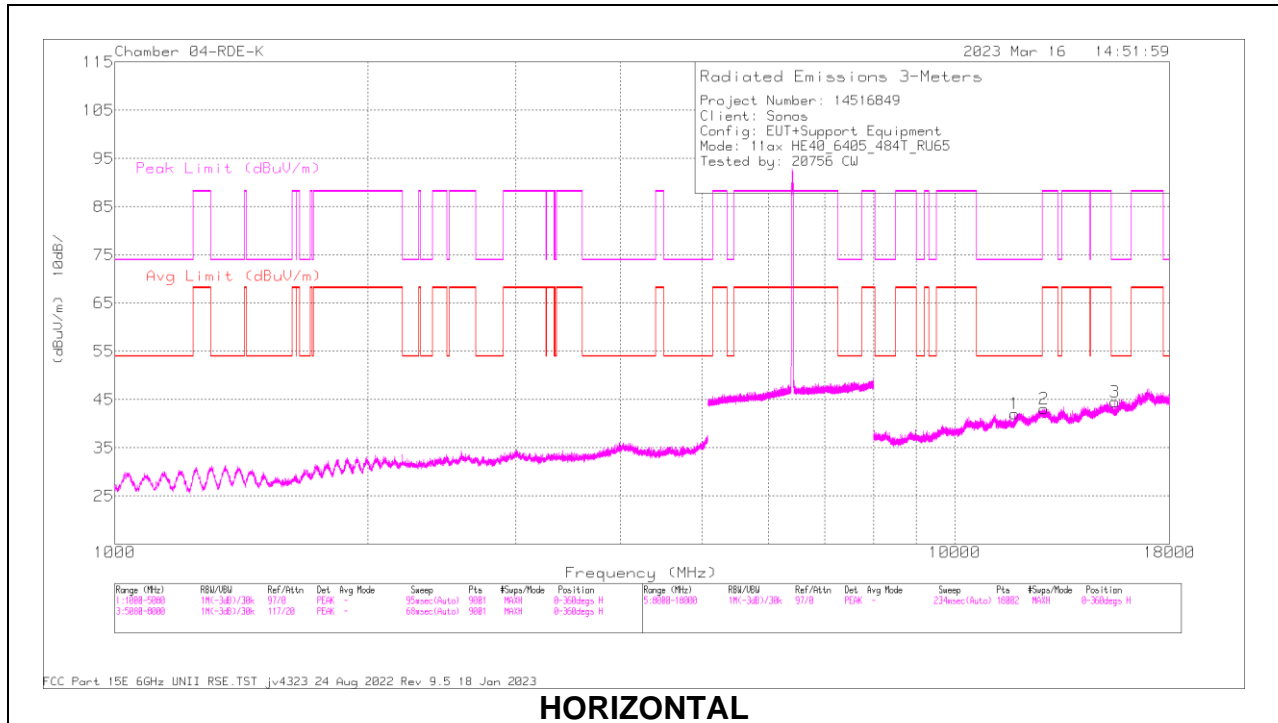

HORIZONTAL

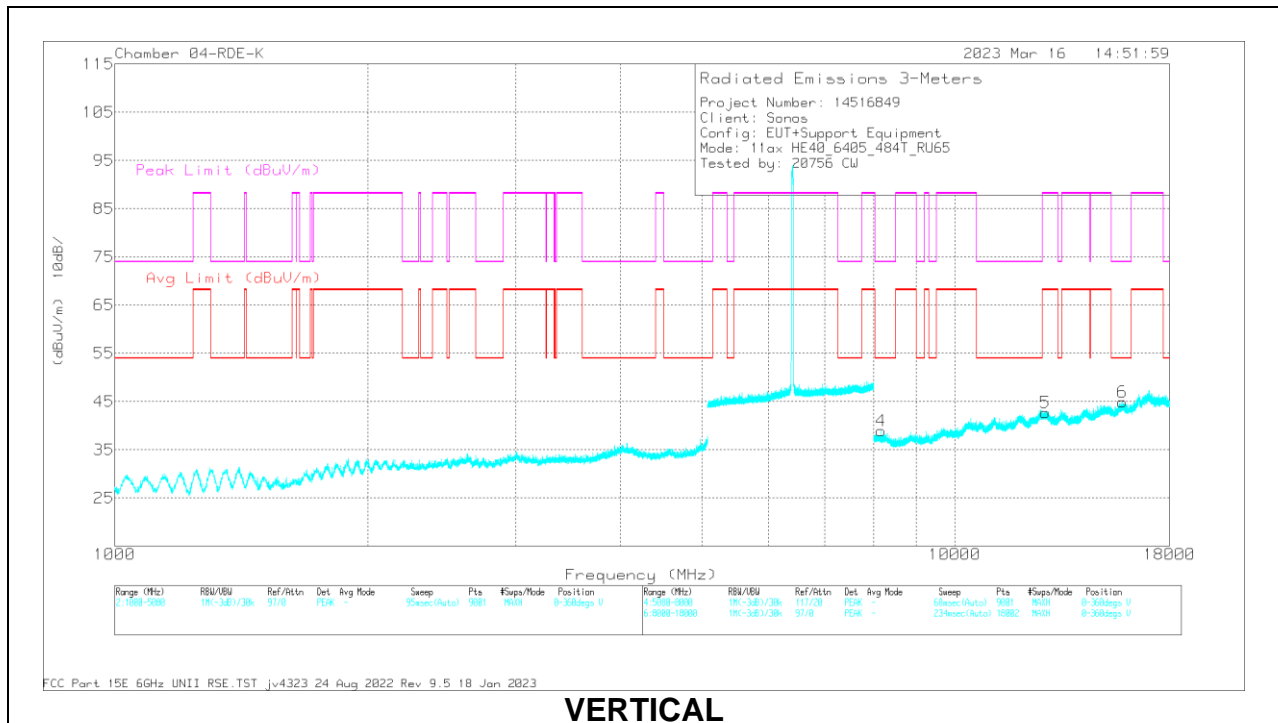

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cb/Fitr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 11775.119	48.01	PK-U	38.3	-35.1	0	51.21	-	-	74	-22.79	0	159	H
	* 11775.212	35.43	ADR	38.3	-35.1	4.24	42.87	54	-11.13	-	-	0	159	H
2	12757.427	46.88	PK-U	39.5	-34.3	0	52.08	-	-	88.2	-36.12	211	128	H
	12757.375	34.93	ADR	39.5	-34.3	4.24	44.37	68.2	-23.83	-	-	211	128	H
3	* 15489.08	46.45	PK-U	40	-33.6	0	52.85	-	-	74	-21.15	195	348	H
	* 15488.918	34.42	ADR	40	-33.6	4.24	45.06	54	-8.94	-	-	195	348	H
4	* 8176.103	49.21	PK-U	35.9	-37.4	0	47.71	-	-	74	-26.29	166	140	V
	* 8175.849	37.27	ADR	35.9	-37.4	4.24	340.01	54	-13.99	-	-	166	140	V
5	12806.351	46.83	PK-U	39.4	-34.4	0	51.83	-	-	88.2	-36.37	6	359	V
	12806.507	34.79	ADR	39.4	-34.4	4.24	44.03	68.2	-24.15	-	-	6	359	V
6	* 15815.627	47.47	PK-U	40.2	-33.3	0	54.37	-	-	74	-19.63	217	334	V
	* 15815.773	35.57	ADR	40.2	-33.3	4.24	46.71	54	-7.29	-	-	217	334	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.3. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE UNII-5 BAND

2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 0

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

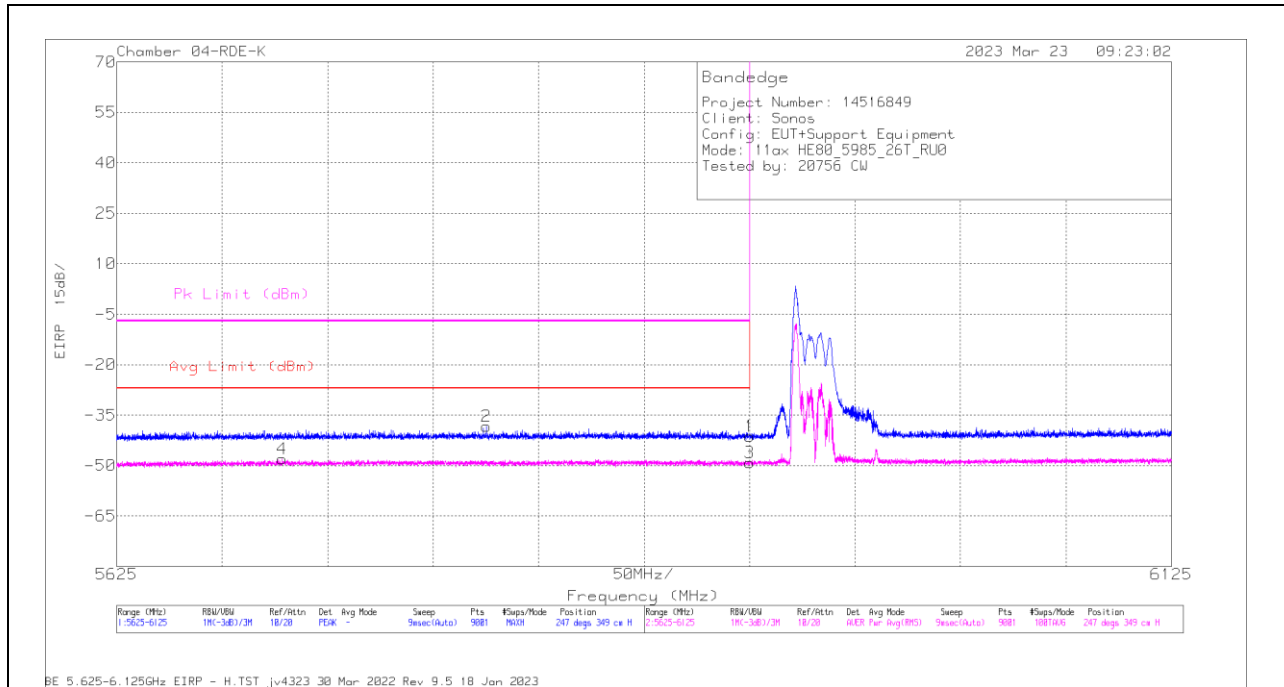


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	223083 ACF (dB) 3mH	Amp/Cb/Pad (dB)	Conversion Factor (dB)	DCCF (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Pk Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5925	-58.13	Pk	34.9	-29.9	11.8	0	-41.33	-	-	-7	-34.33	247	349	H
2	5800.279	-55.05	Pk	34.8	-29.9	11.8	0	-38.35	-	-	-7	-31.35	247	349	H
3	5925	-69.02	RMS	34.9	-29.9	11.8	3.12	-49.1	-27	-22.1	-	-	247	349	H
4	5703.39	-67.52	RMS	34.6	-30.1	11.8	3.12	-48.1	-27	-21.1	-	-	247	349	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

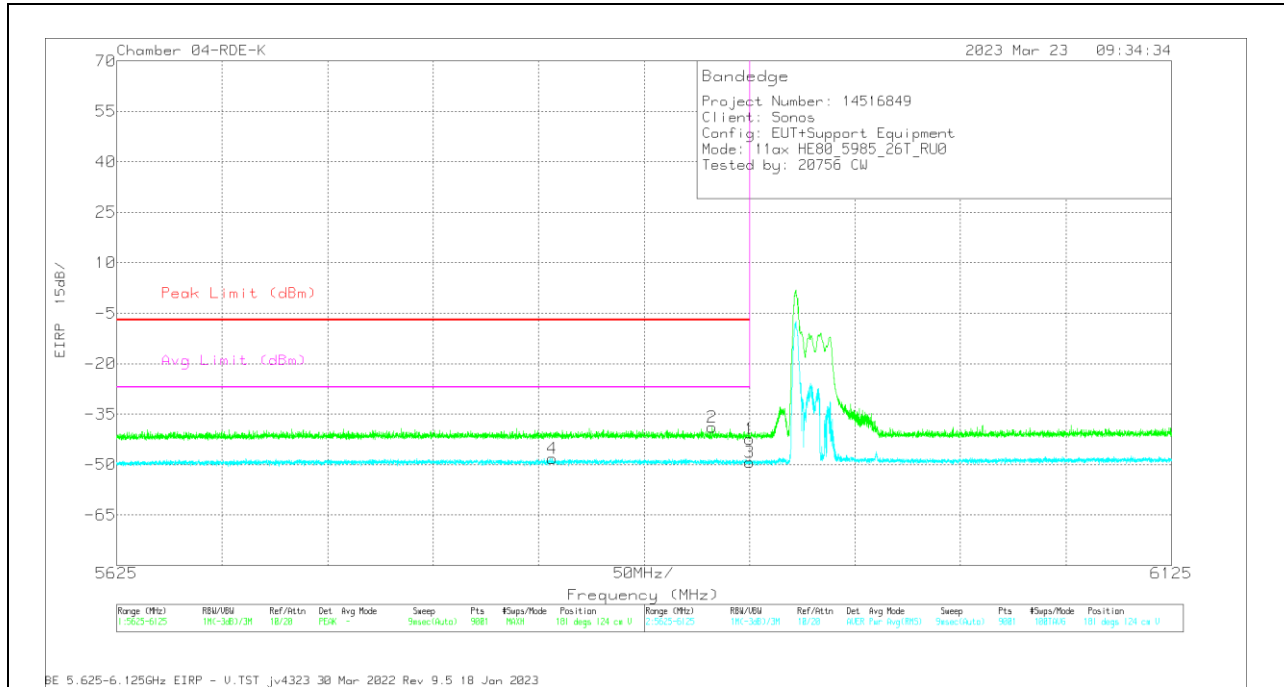


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	223083 ACF (dB) 3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	DCCF (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5925	-59.17	Pk	34.9	-29.9	11.8	0	-42.37	-7	-35.37	-	-	181	124	V
2	5907.28	-55.77	Pk	34.9	-29.8	11.8	0	-38.87	-7	-31.87	-	-	181	124	V
3	5925	-69.33	RMS	34.9	-29.9	11.8	3.12	-49.41	-	-	-27	-22.41	181	124	V
4	5831.391	-67.96	RMS	34.8	-29.9	11.8	3.12	-48.14	-	-	-27	-21.14	181	124	V


Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

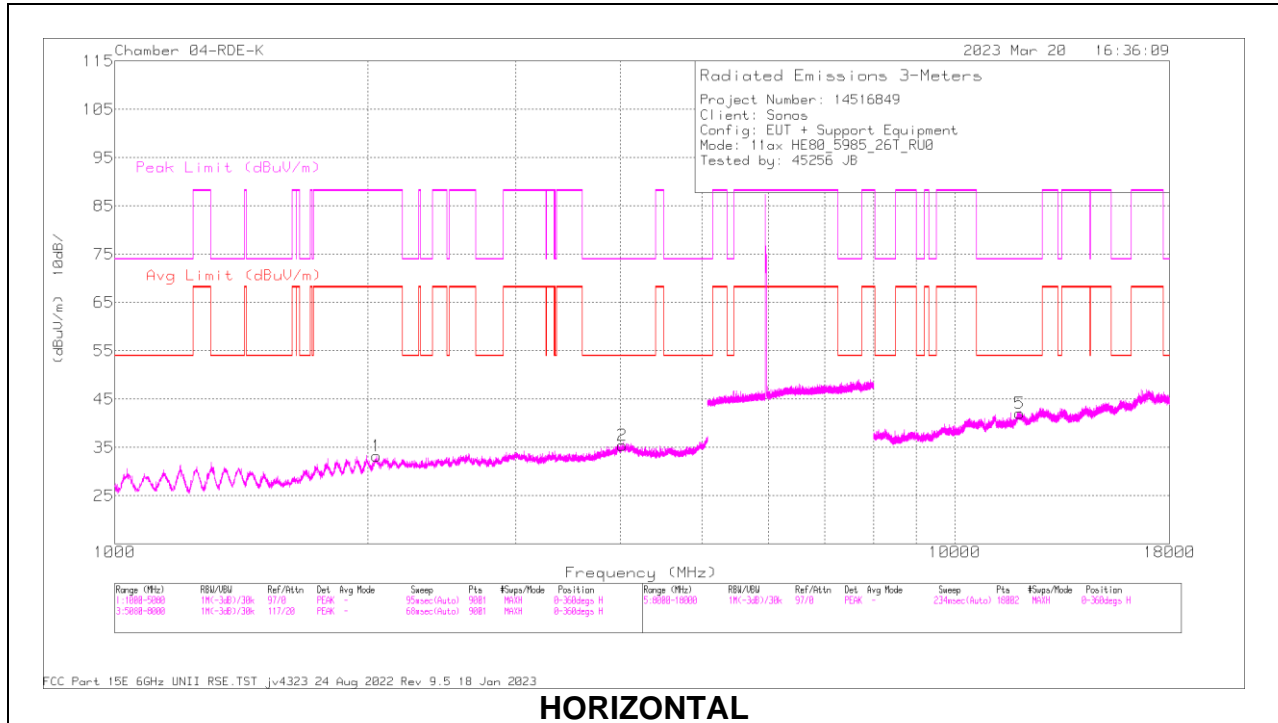

HORIZONTAL

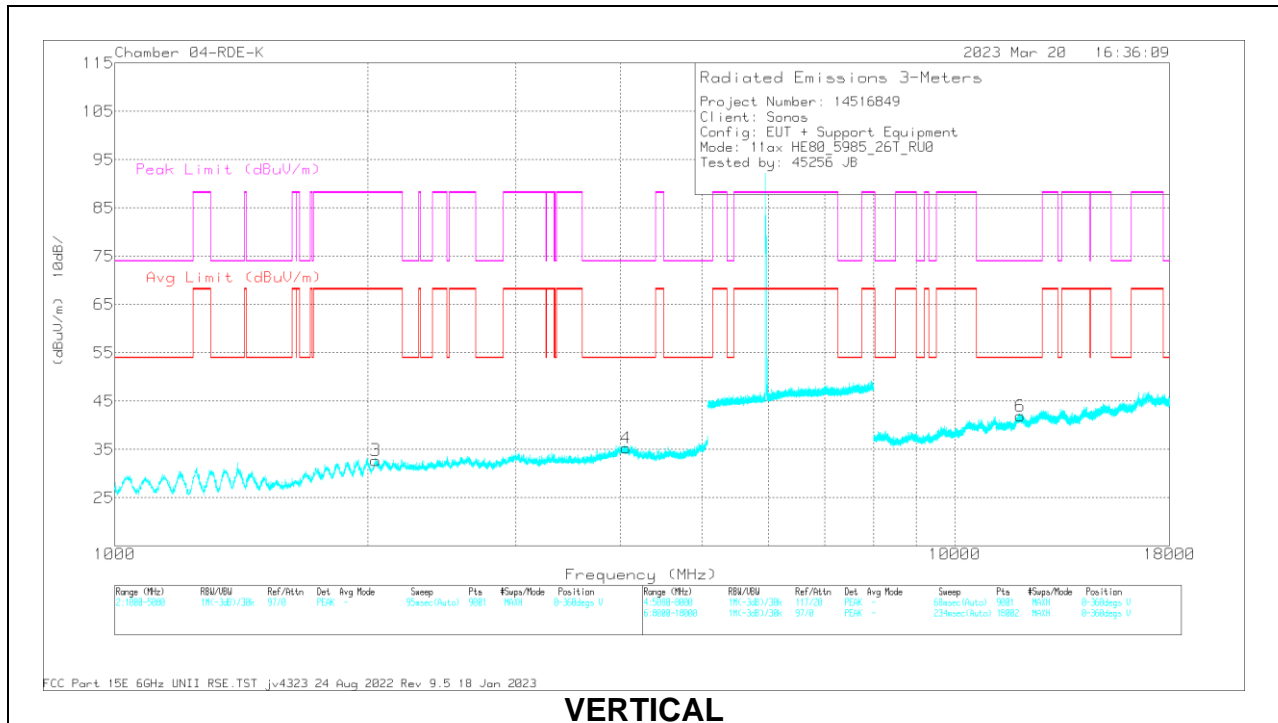

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cbl/Filtr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2046.073	56.74	PK-U	31.7	-45.7	0	42.74	-	-	88.2	-45.46	345	145	H
	2046.412	45.06	ADR	31.7	-45.7	3.12	34.18	68.2	-34.02	-	-	345	145	H
2	* 4017.84	51.87	PK-U	35.2	-41.6	0	45.47	-	-	74	-28.53	85	288	H
	* 4019.072	40.08	ADR	35.2	-41.7	3.12	36.70	54	-17.30	-	-	85	288	H
3	2047.031	56.81	PK-U	31.7	-45.7	0	42.81	-	-	88.2	-45.39	139	203	V
	2046.644	45.1	ADR	31.7	-45.7	3.12	34.22	68.2	-33.98	-	-	139	203	V
4	* 4063.18	52.02	PK-U	35.2	-41.6	0	45.62	-	-	74	-28.38	15	359	V
	* 4060.477	40.25	ADR	35.2	-41.6	3.12	36.97	54	-17.03	-	-	15	359	V
5	* 11934.489	47.07	PK-U	38.5	-34.7	0	50.87	-	-	74	-23.13	288	348	H
	* 11930.751	35.43	ADR	38.5	-34.7	3.12	42.35	54	-11.65	-	-	288	348	H
6	* 11961.028	47.2	PK-U	38.6	-34.4	0	51.4	-	-	74	-22.6	80	143	V
	* 11960.626	35.46	ADR	38.6	-34.4	3.12	42.78	54	-11.22	-	-	80	143	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 18

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL

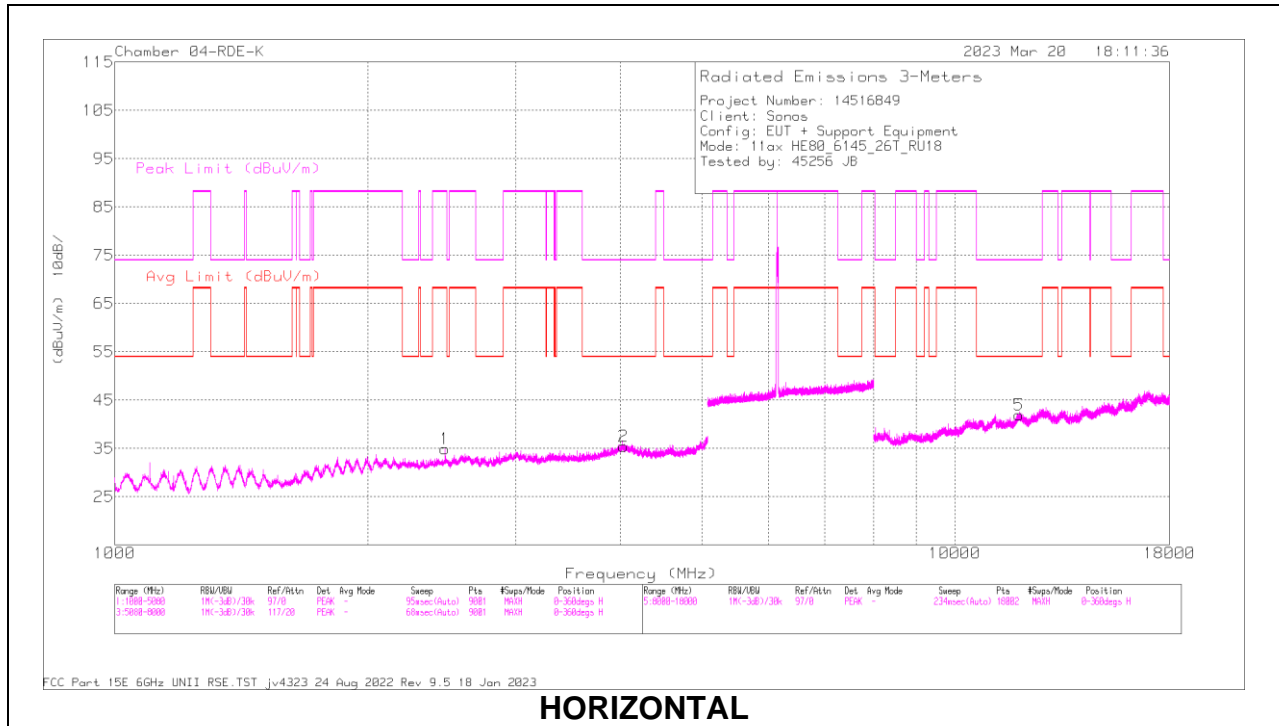

HORIZONTAL

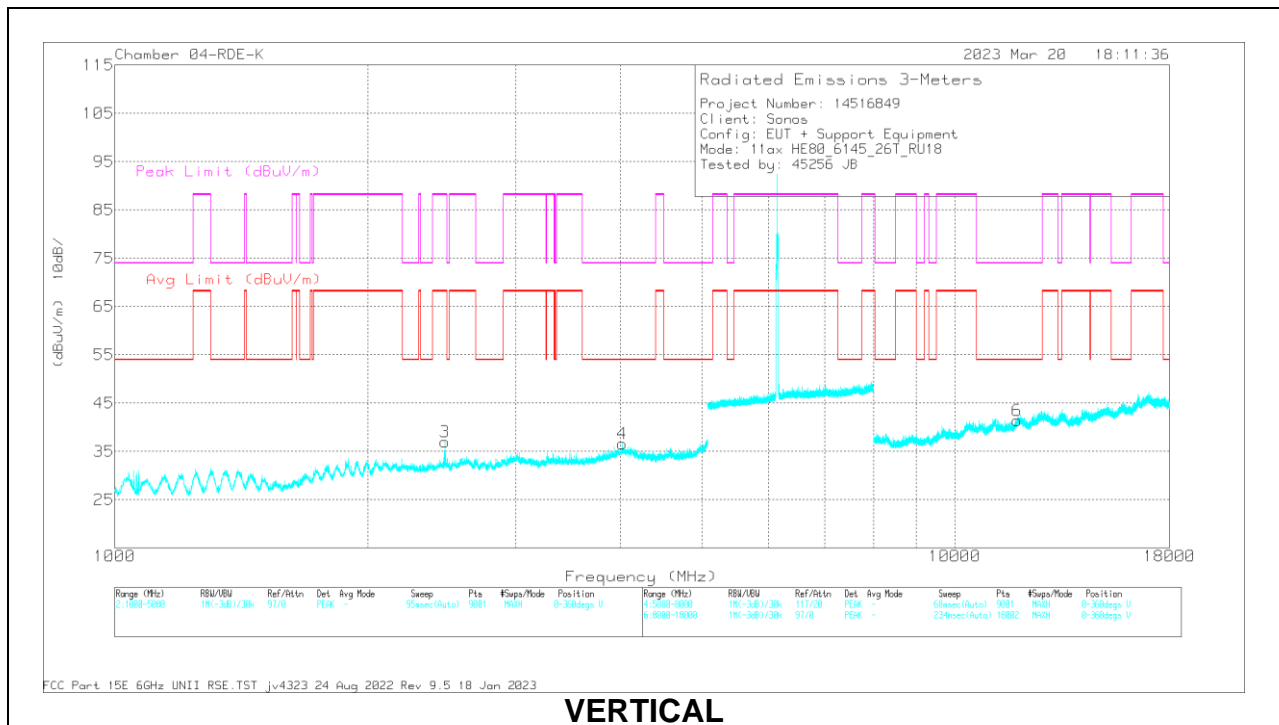

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cb/Filtr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2469.788	55.27	PK-U	32.1	-44.2	0	43.17	-	-	88.2	-45.03	8	368	H
	2469.823	43.11	ADR	32.1	-44.2	3.12	34.13	68.2	-34.07	-	-	8	368	H
2	* 4034.838	52.24	PK-U	35.2	-41.7	0	45.74	-	-	74	-28.26	238	239	H
	* 4033.473	40.18	ADR	35.2	-41.6	3.12	36.90	54	-17.10	-	-	238	239	H
3	2470.913	55.57	PK-U	32.1	-44.2	0	43.47	-	-	88.2	-44.73	45	205	V
	2469.32	43.1	ADR	32.1	-44.2	3.12	34.12	68.2	-34.08	-	-	45	205	V
4	* 4017.411	51.97	PK-U	35.2	-41.6	0	45.57	-	-	74	-28.43	268	319	V
	* 4017.115	40.28	ADR	35.2	-41.6	3.12	37.00	54	-17.00	-	-	268	319	V
5	* 11918.33	47.48	PK-U	38.5	-34.7	0	51.28	-	-	74	-22.72	285	341	H
	* 11919.571	35.43	ADR	38.5	-34.7	3.12	42.35	54	-11.65	-	-	285	341	H
6	* 11861.887	47.88	PK-U	38.4	-35.1	0	51.18	-	-	74	-22.82	189	103	V
	* 11858.823	35.79	ADR	38.4	-35.1	3.12	42.21	54	-11.79	-	-	189	103	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 1 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 36

HARMONICS AND SPURIOUS EMISSIONS

HIGH CHANNEL

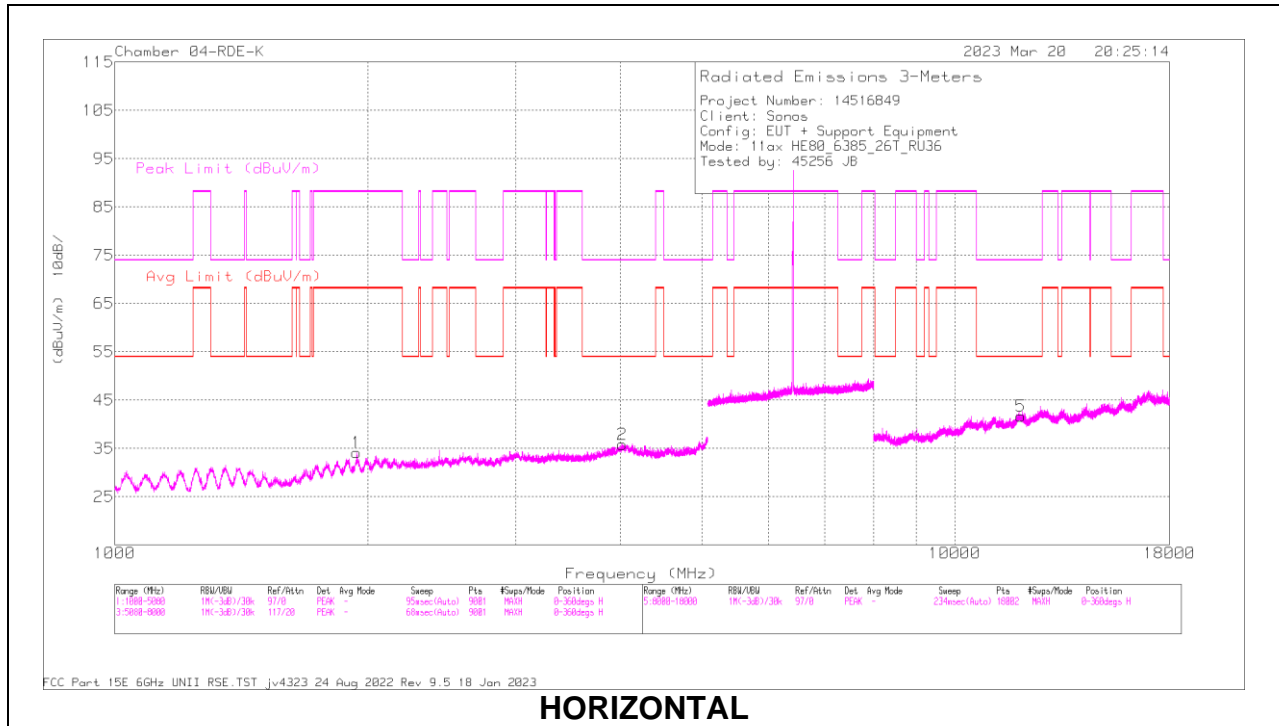

HORIZONTAL

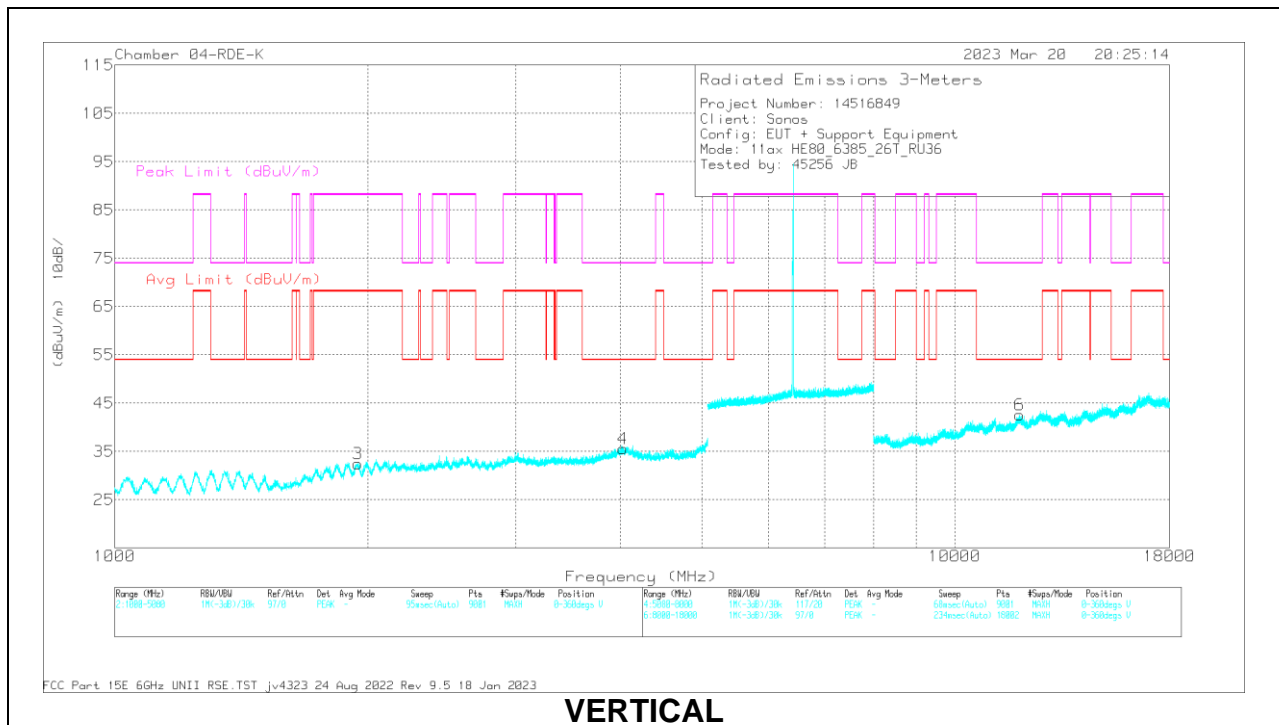

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cb/Fitr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1944.455	57.02	PK-U	31.4	-45.4	0	43.02	-	-	88.2	-45.18	247	332	H
	1942.379	45.16	ADR	31.4	-45.3	3.12	34.38	68.2	-33.82	-	-	247	332	H
2	* 4012.426	52.91	PK-U	35.2	-41.6	0	46.51	-	-	74	-27.49	150	107	H
	* 4012.716	40.27	ADR	35.2	-41.6	3.12	36.99	54	-17.01	-	-	150	107	H
3	1942.321	57.15	PK-U	31.4	-45.3	0	43.25	-	-	88.2	-44.95	140	190	V
	1943.018	45.1	ADR	31.4	-45.3	3.12	34.32	68.2	-33.88	-	-	140	190	V
4	* 4026.604	52.37	PK-U	35.2	-41.7	0	45.87	-	-	74	-28.13	217	133	V
	* 4025.323	40.35	ADR	35.2	-41.7	3.12	36.97	54	-17.03	-	-	217	133	V
5	* 11980.761	47.29	PK-U	38.6	-34.3	0	51.59	-	-	74	-22.41	272	392	H
	* 11980.387	35.24	ADR	38.6	-34.3	3.12	42.66	54	-11.34	-	-	272	392	H
6	* 11941.939	47.14	PK-U	38.5	-34.5	0	51.14	-	-	74	-22.96	297	279	V
	* 11942.509	35.36	ADR	38.5	-34.5	3.12	42.48	54	-11.52	-	-	297	279	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 1 + Antenna 4 OFDMA MODE: 996-Tones, RU Index 67

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

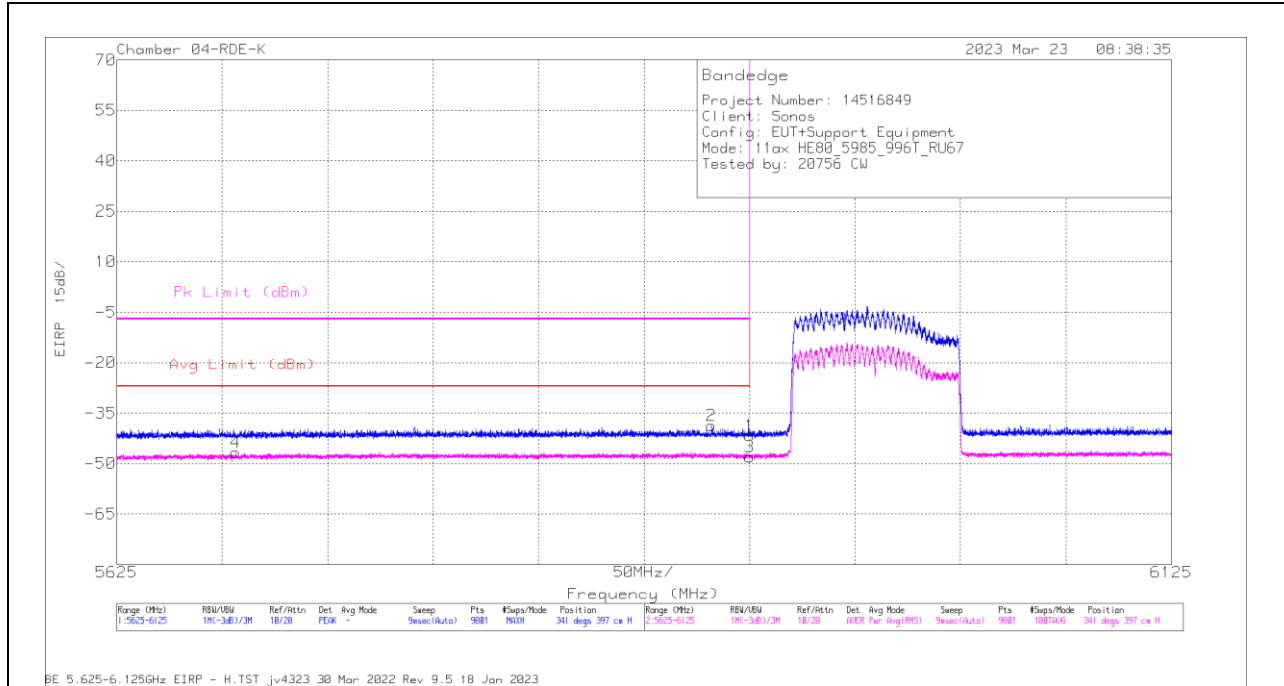


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	223083 ACF (dB) 3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	DCCF (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Pk Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5925	-58.43	Pk	34.9	-29.9	11.8	0	-41.63	-	-	-7	-34.63	341	397	H
2	5906.891	-55.53	Pk	34.9	-29.9	11.8	0	-38.73	-	-	-7	-31.73	341	397	H
3	5925	-69.3	RMS	34.9	-29.9	11.8	4.53	-47.97	-27	-20.97	-	-	341	397	H
4	5681.278	-67.58	RMS	34.6	-30.1	11.8	4.53	-46.75	-27	-19.75	-	-	341	397	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

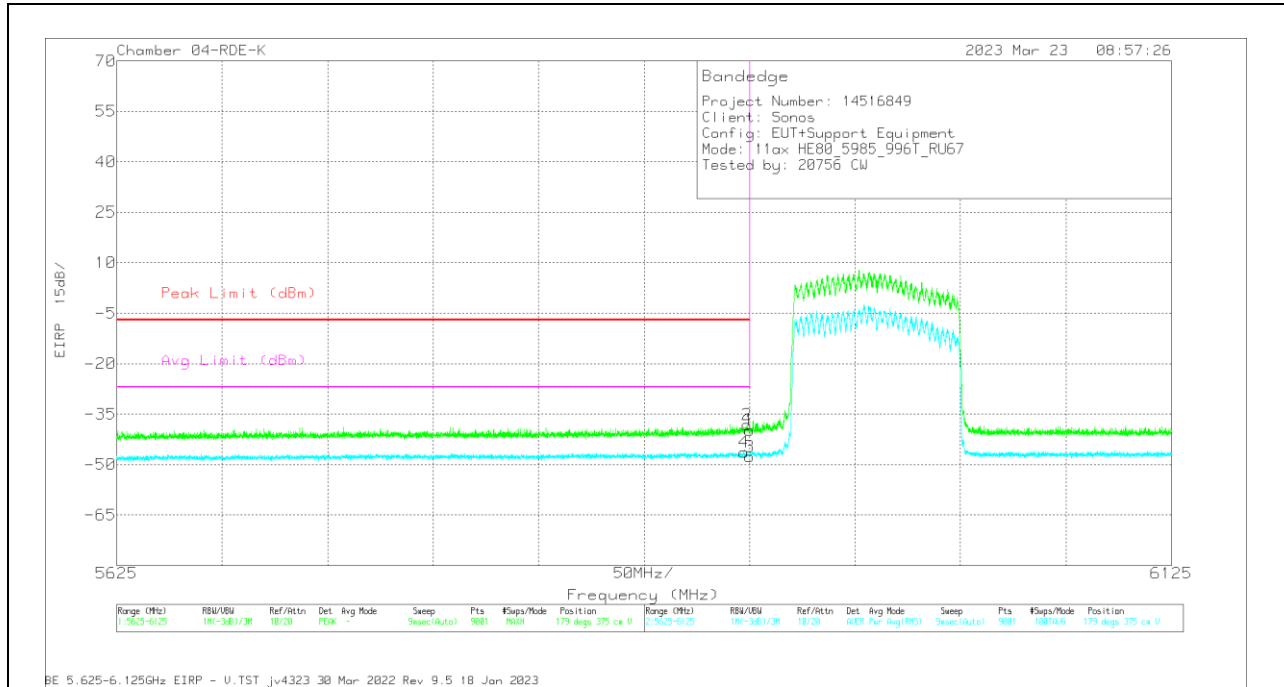


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	223083 ACF (dB) 3mH	Amp/Cb/Pad (dB)	Conversion Factor (dB)	DCCF (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5925	-56.56	Pk	34.9	-29.9	11.8	0	-39.76	-7	-32.76	-	-	179	375	V
2	5923.891	-55.03	Pk	34.9	-29.8	11.8	0	-38.13	-7	-31.13	-	-	179	375	V
3	5925	-68.97	RMS	34.9	-29.9	11.8	4.53	-47.64	-	-	-27	-20.64	179	375	V
4	5922.447	-67.71	RMS	34.9	-29.8	11.8	4.53	-46.28	-	-	-27	-19.28	179	375	V


Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

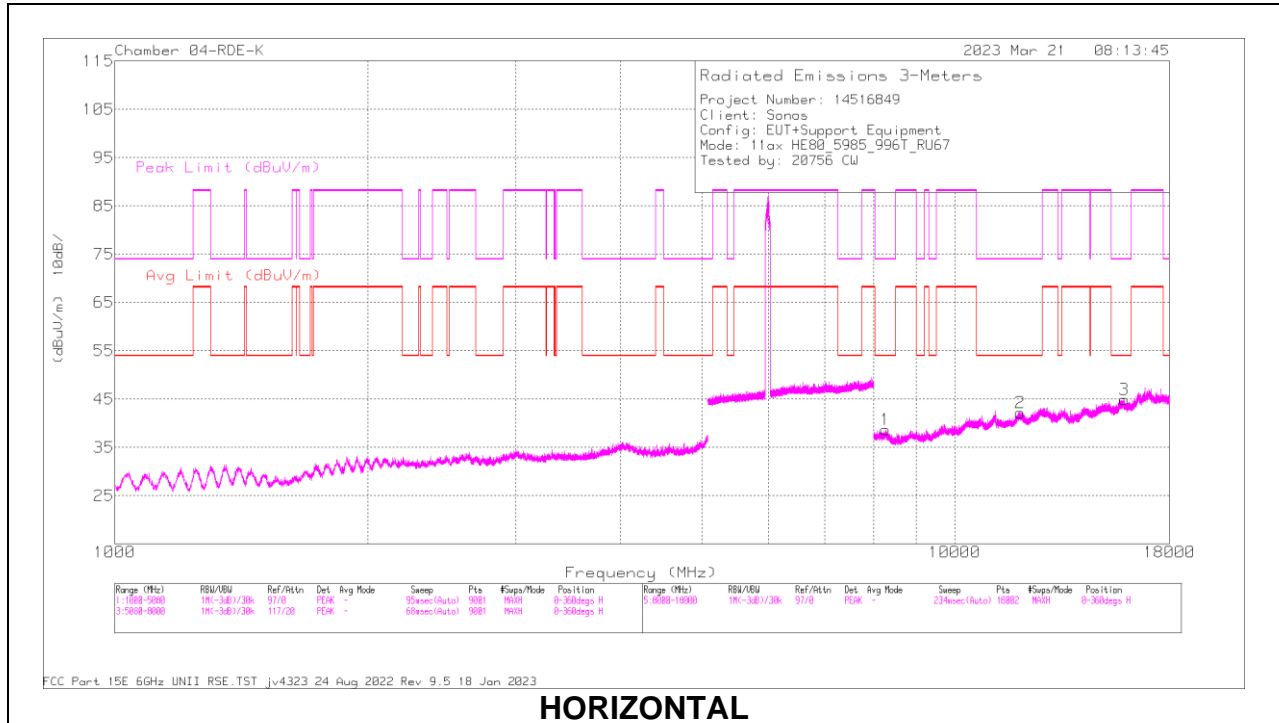

HORIZONTAL

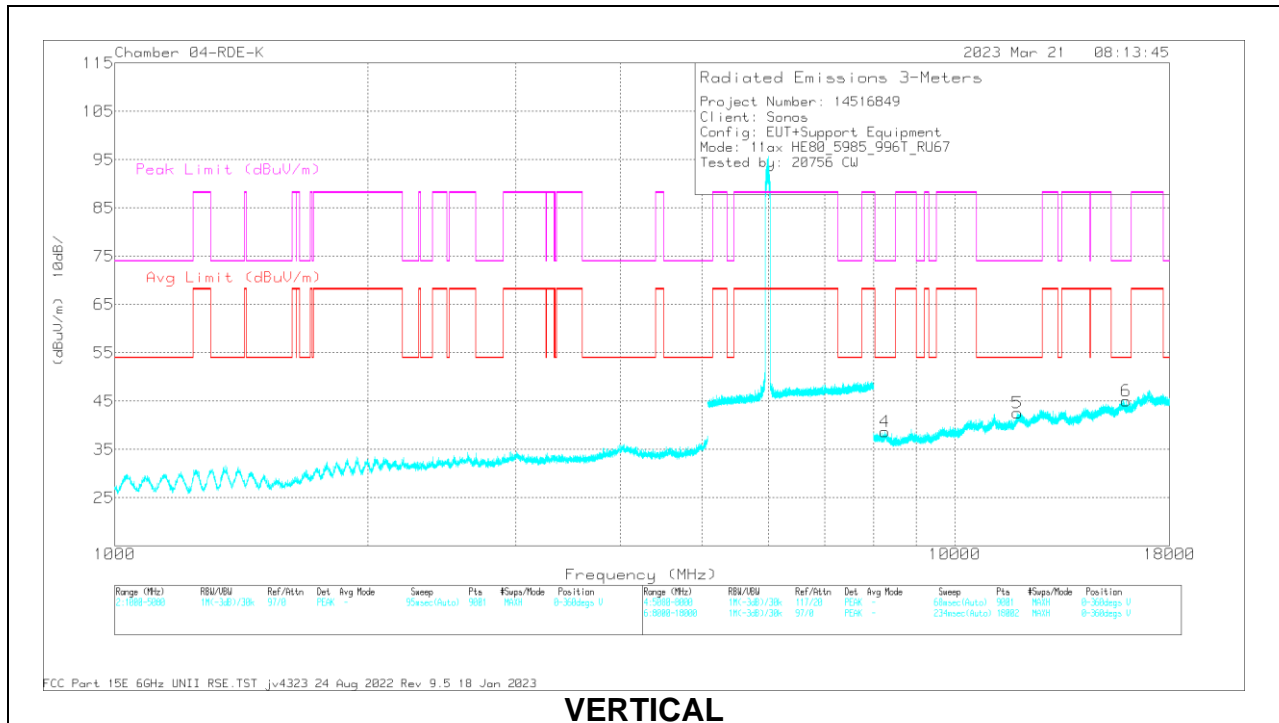

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cb/Fitr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 8270.813	49.77	PK-U	35.9	-36.8	0	48.87	-	-	74	-25.13	46	179	H
	* 8269.675	37.45	ADR	35.9	-36.8	4.53	41.08	54	-12.92	-	-	46	179	H
2	* 11960.174	47.92	PK-U	38.6	-34.4	0	52.12	-	-	74	-21.88	324	233	H
	* 11960.214	35.61	ADR	38.6	-34.4	4.53	44.34	54	-9.66	-	-	324	233	H
3	* 15910.406	46.51	PK-U	40.2	-33.2	0	53.51	-	-	74	-20.49	194	324	H
	* 15910.542	35	ADR	40.2	-33.2	4.53	46.53	54	-7.47	-	-	194	324	H
4	* 8259.763	49.24	PK-U	35.9	-36.9	0	48.24	-	-	74	-25.76	11	174	V
	* 8259.971	37.34	ADR	35.9	-36.9	4.53	40.87	54	-13.13	-	-	11	174	V
5	* 11867.754	47.85	PK-U	38.4	-35	0	51.25	-	-	74	-22.75	117	285	V
	* 11867.672	35.88	ADR	38.4	-35	4.53	43.81	54	-10.19	-	-	117	285	V
6	* 15986.531	47.24	PK-U	40.2	-33.2	0	54.24	-	-	74	-19.76	244	247	V
	* 15986.67	34.92	ADR	40.2	-33.2	4.53	46.45	54	-7.55	-	-	244	247	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL

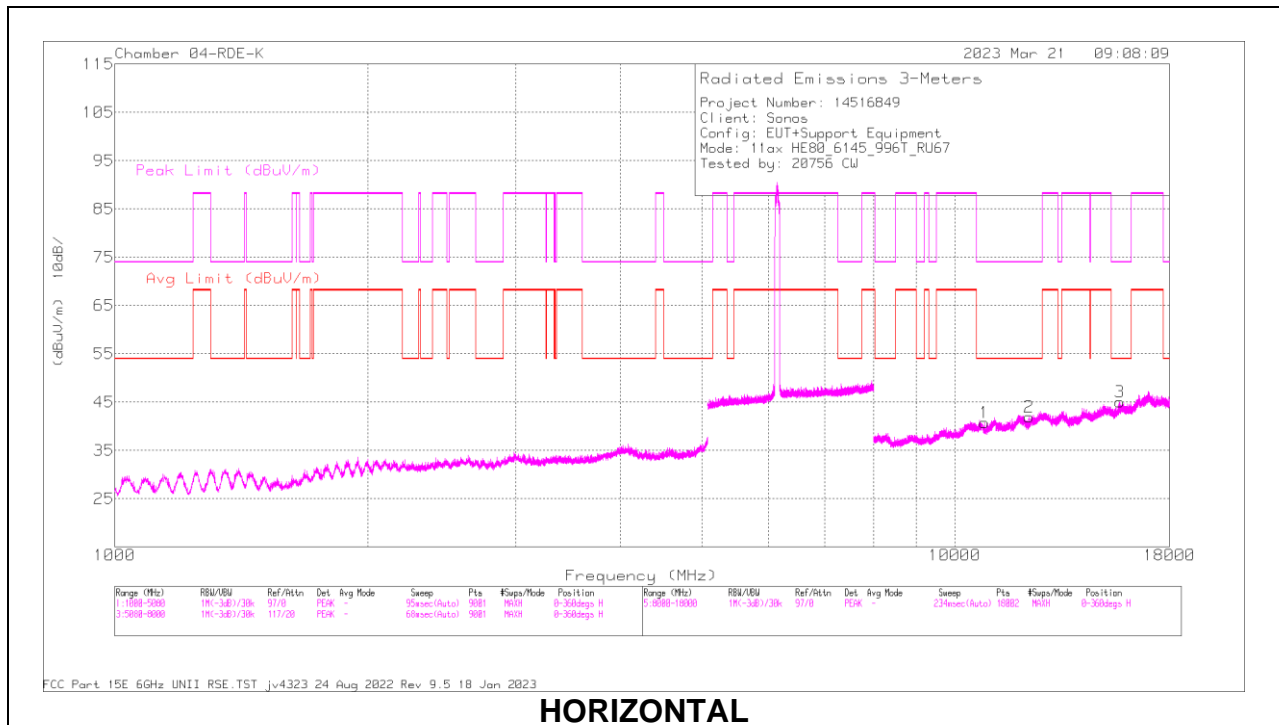

HORIZONTAL

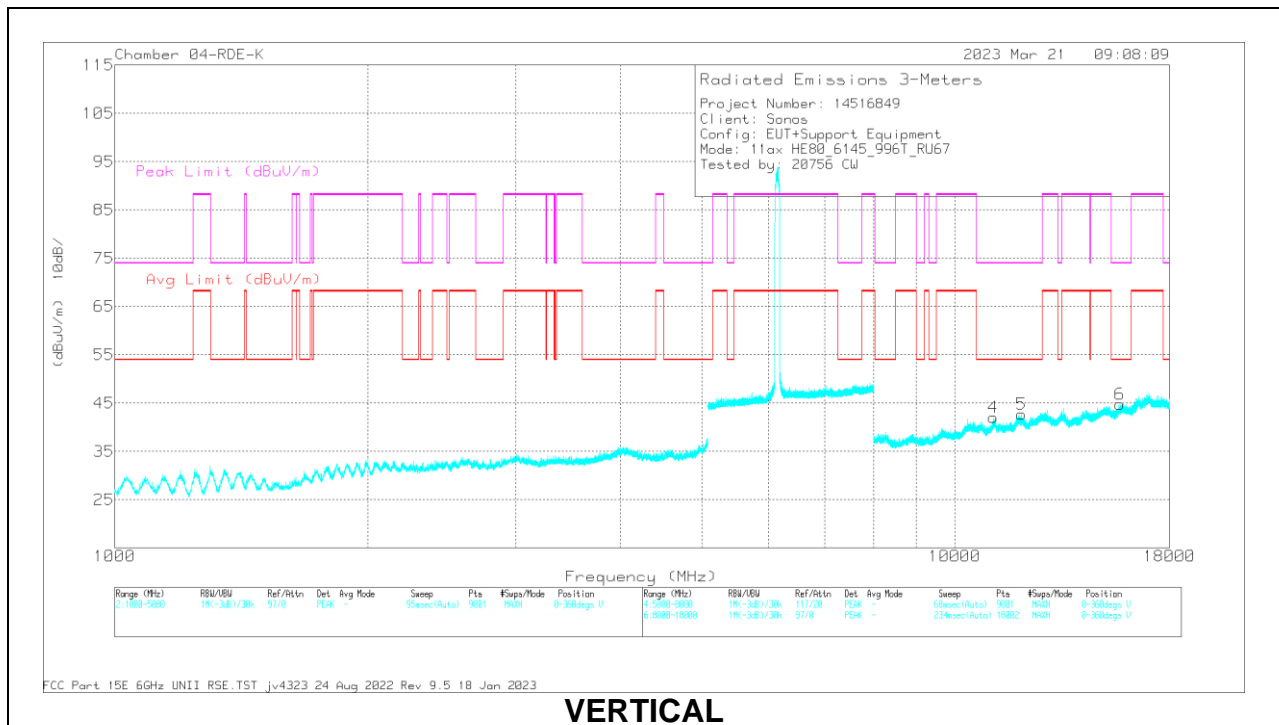

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cb/Fitr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 10843.57	48.66	PK-U	38	-36.1	0	50.56	-	-	74	-23.44	357	162	H
	* 10845.528	35.93	ADR	38	-36.2	4.53	42.26	54	-11.74	-	-	357	162	H
2	* 12258.801	46.65	PK-U	39	-34.5	0	51.15	-	-	74	-22.85	3	105	H
	* 12258.918	34.38	ADR	39	-34.5	4.53	43.41	54	-10.59	-	-	3	105	H
3	* 15714.396	47.75	PK-U	40.1	-33.3	0	54.55	-	-	74	-19.45	101	108	H
	* 15714.373	35.25	ADR	40.1	-33.3	4.53	46.58	54	-7.42	-	-	101	108	H
4	* 11107.232	49.17	PK-U	38	-36.1	0	51.07	-	-	74	-22.93	222	337	V
	* 11107.714	36.9	ADR	38	-36.1	4.53	43.33	54	-10.67	-	-	222	337	V
5	* 12006.747	47.34	PK-U	38.7	-34.1	0	51.94	-	-	74	-22.06	41	249	V
	* 12006.693	35.2	ADR	38.7	-34.1	4.53	44.33	54	-9.67	-	-	41	249	V
6	* 15724.394	46.99	PK-U	40.1	-33.4	0	53.69	-	-	74	-20.31	108	220	V
	* 15724.438	35.29	ADR	40.1	-33.4	4.53	46.52	54	-7.48	-	-	108	220	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL

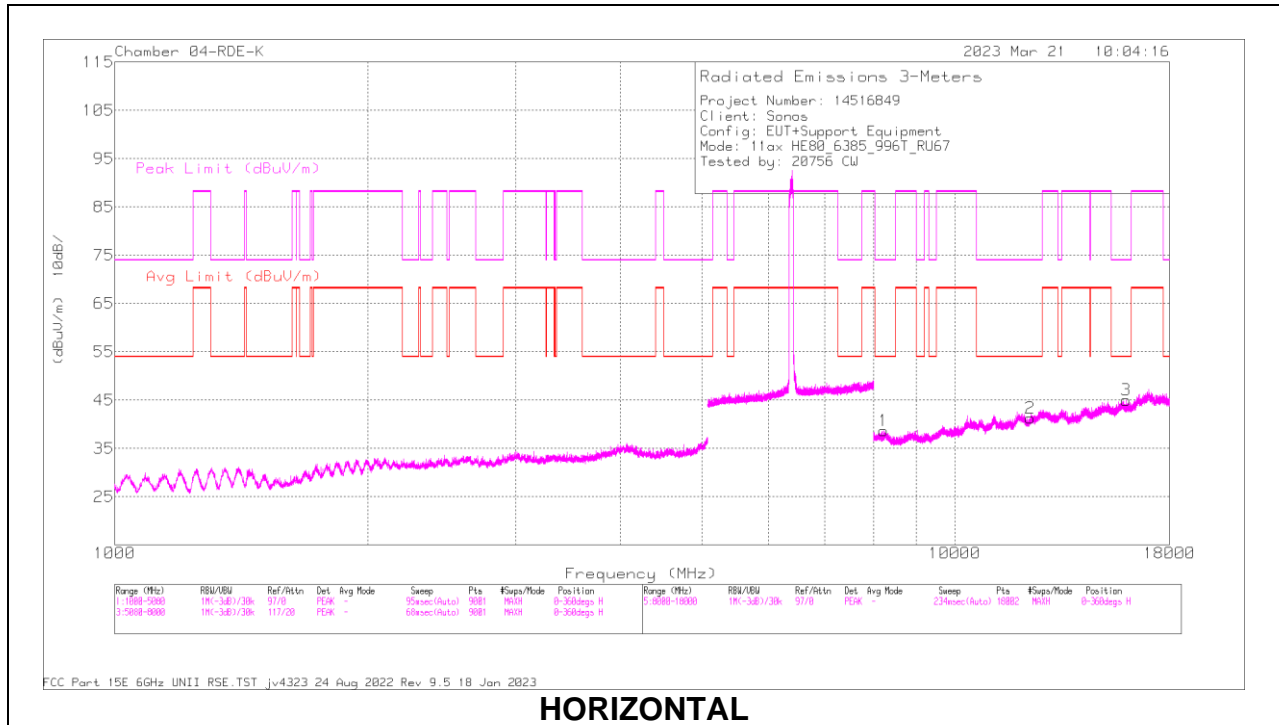

HORIZONTAL

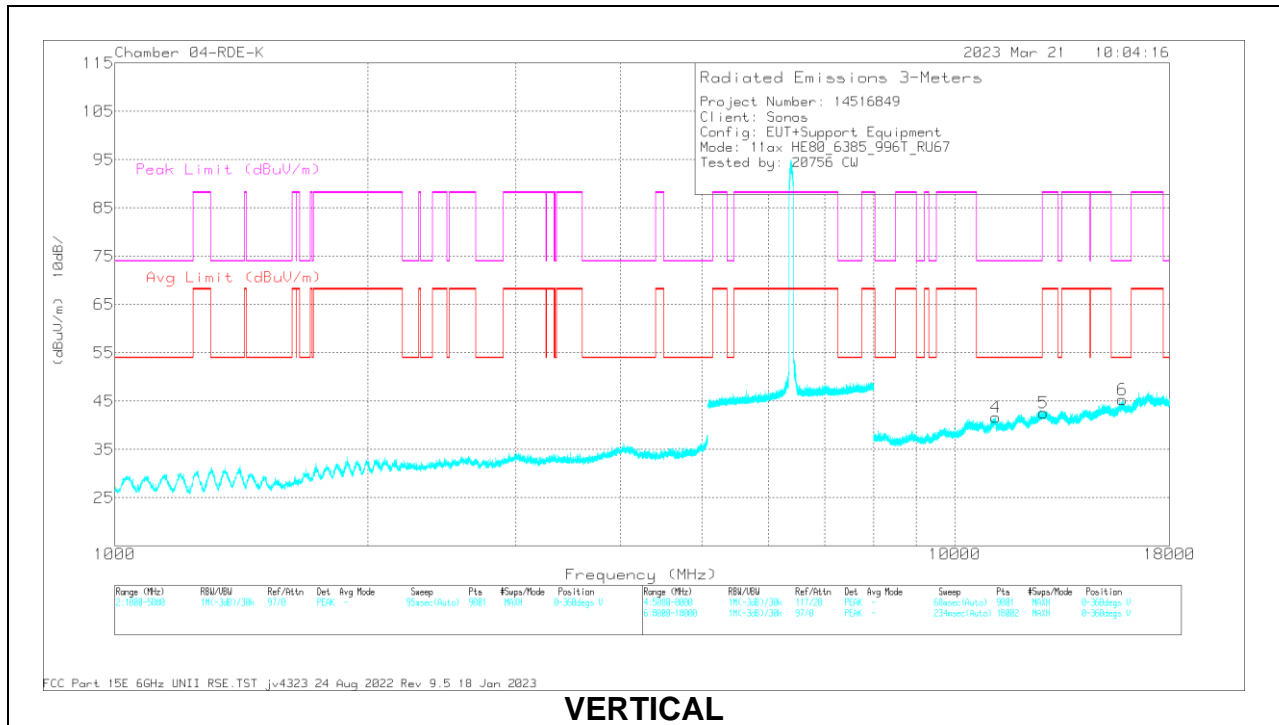

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cb/Fitr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 8219.023	49.37	PK-U	35.9	-37	0	48.27	-	-	74	-25.73	237	112	H
	* 8219.29	37.29	ADR	35.9	-37	4.53	40.72	54	-13.28	-	-	237	112	H
2	* 12288.988	46.3	PK-U	39	-34.6	0	50.7	-	-	74	-23.3	65	331	H
	* 12289.024	34.29	ADR	39	-34.6	4.53	43.22	54	-10.78	-	-	65	331	H
3	* 15996.678	46.8	PK-U	40.2	-33.3	0	53.7	-	-	74	-20.3	151	177	H
	* 15996.649	34.87	ADR	40.2	-33.2	4.53	46.4	54	-7.6	-	-	151	177	H
4	* 11176.241	47.96	PK-U	37.9	-35.4	0	50.46	-	-	74	-23.54	356	240	V
	* 11176.542	36.22	ADR	37.9	-35.4	4.53	43.25	54	-10.75	-	-	356	240	V
5	12733.997	47.39	PK-U	39.5	-34.5	0	52.39	-	-	88.2	-35.81	151	257	V
	12736.573	35.07	ADR	39.5	-34.4	4.53	44.7	68.2	-23.5	-	-	151	257	V
6	* 15834.586	47.53	PK-U	40.2	-33.3	0	54.43	-	-	74	-19.57	207	269	V
	* 15834.482	35.6	ADR	40.2	-33.4	4.53	46.93	54	-7.07	-	-	207	269	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.4. TX ABOVE 1 GHz 802.11ax HE20 MODE IN THE UNII-6 BAND


2TX Antenna 3 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 0

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

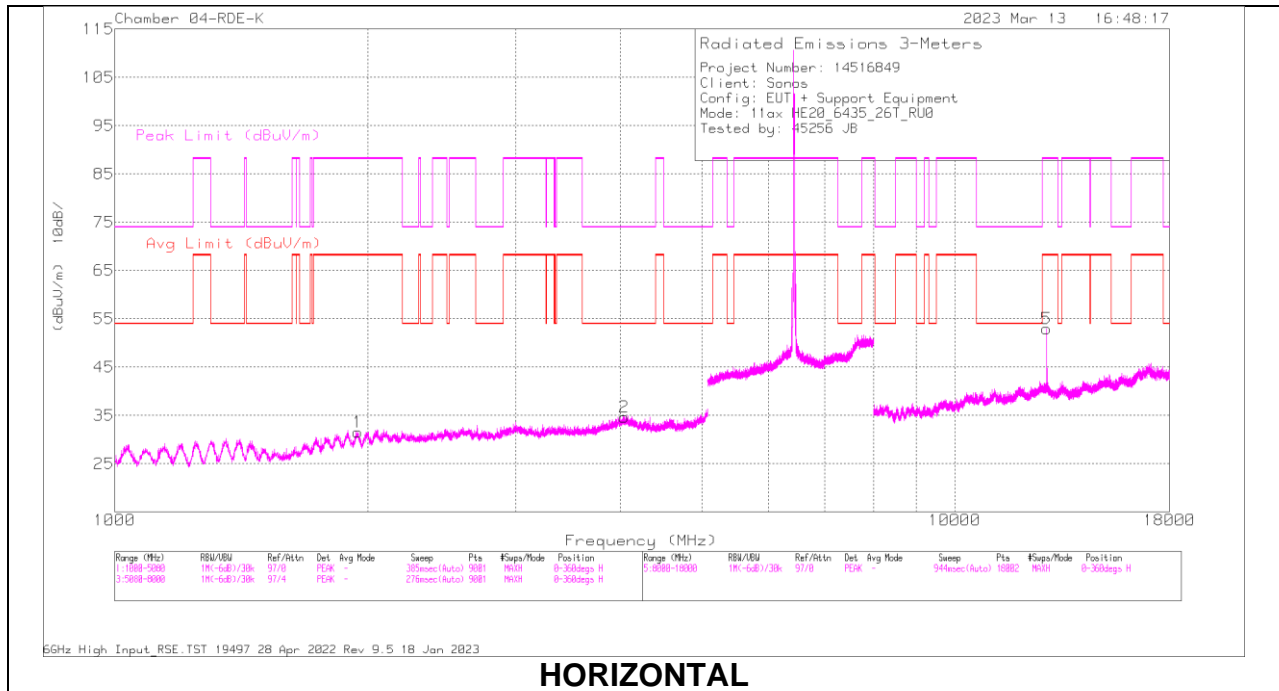

HORIZONTAL

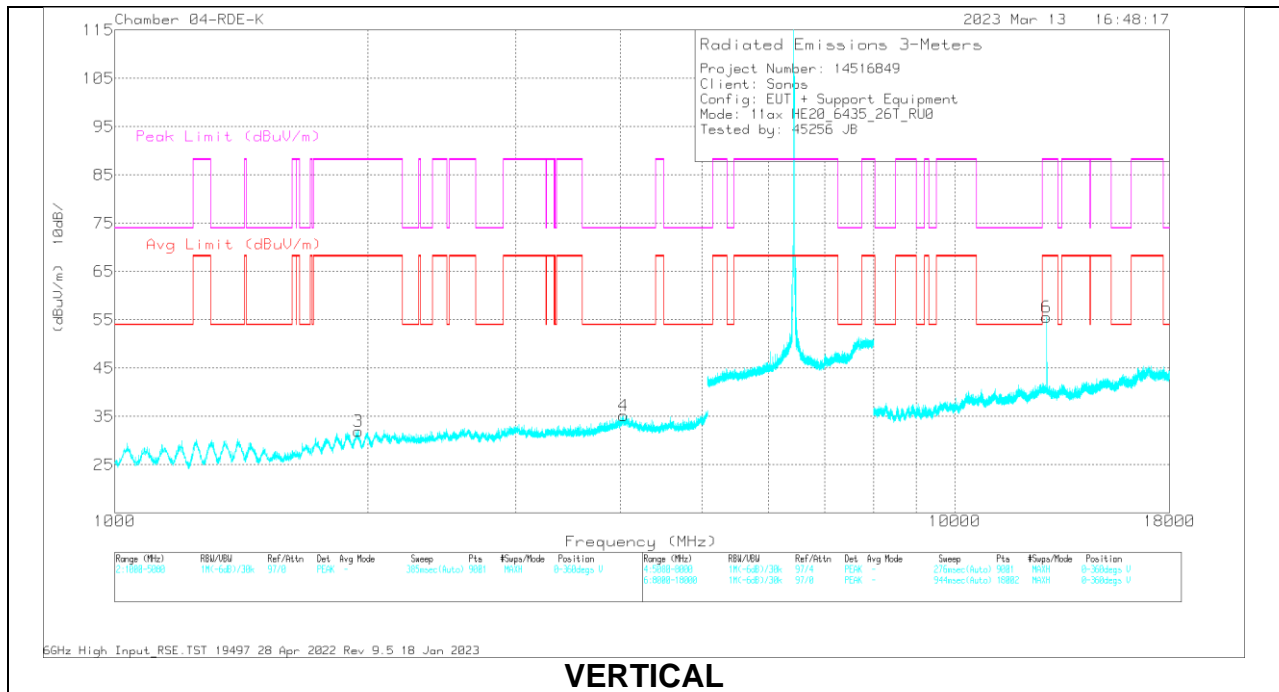

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cbl/Filtr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1946.24	55.47	PK-U	31.4	-45.3	0	41.57	-	-	88.2	-46.63	67	382	H
	1943.716	43.63	ADR	31.4	-45.4	3.13	32.76	68.2	-35.44	-	-	67	382	H
2	* 4037.619	50.3	PK-U	35.2	-41.6	0	43.9	-	-	74	-30.1	341	117	H
	* 4039.24	38.94	ADR	35.2	-41.6	3.13	35.67	54	-18.33	-	-	341	117	H
3	1950.697	55.4	PK-U	31.4	-45.6	0	41.2	-	-	88.2	-47	122	267	V
	1947.655	43.34	ADR	31.4	-45.2	3.13	32.67	68.2	-35.53	-	-	122	267	V
4	* 4030.94	50.68	PK-U	35.2	-41.7	0	44.18	-	-	74	-29.82	52	144	V
	* 4031.597	38.85	ADR	35.2	-41.7	3.13	35.48	54	-18.52	-	-	52	144	V
5	12853.425	57.01	PK-U	39.4	-34.4	0	62.01	-	-	88.2	-26.19	166	159	H
	12853.435	41.68	ADR	39.4	-34.4	3.13	49.81	68.2	-18.39	-	-	166	159	H
6	12853.026	57.66	PK-U	39.4	-34.4	0	62.66	-	-	88.2	-25.54	106	104	V
	12853.285	45.71	ADR	39.4	-34.4	3.13	53.84	68.2	-14.36	-	-	106	104	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 3 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 4

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL

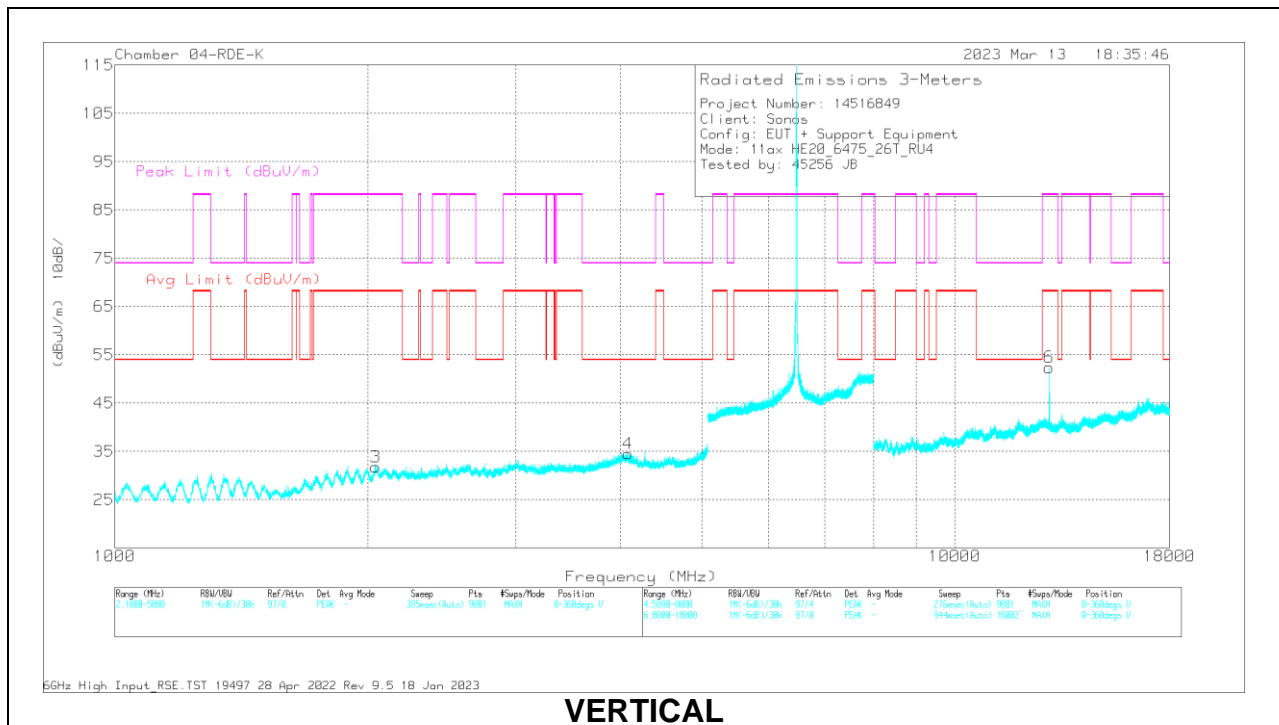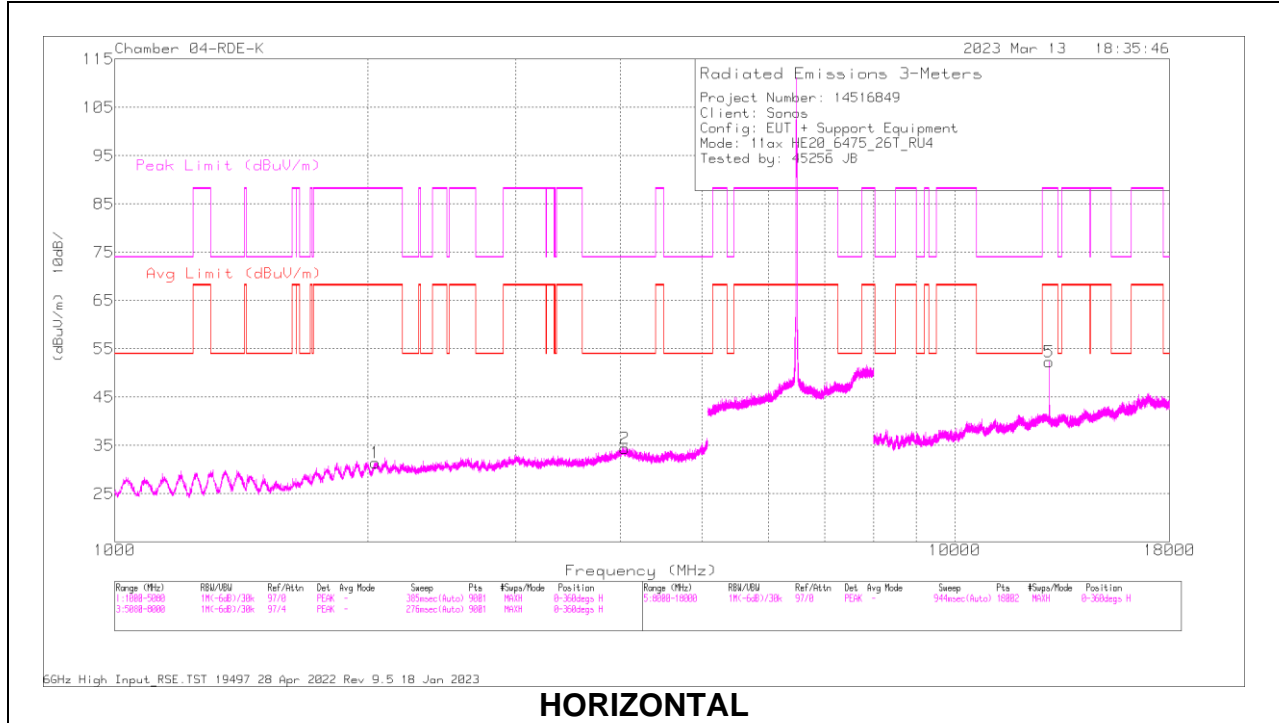

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cbl/Filtr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2042.173	55.51	PK-U	31.7	-45.7	0	41.51	-	-	88.2	-46.69	327	157	H
	2042.095	43.98	ADR	31.7	-45.7	3.13	33.11	68.2	-35.09	-	-	327	157	H
2	* 4045.262	50.45	PK-U	35.2	-41.7	0	43.95	-	-	74	-30.05	19	342	H
	* 4045.607	38.47	ADR	35.2	-41.7	3.13	35.1	54	-18.9	-	-	19	342	H
3	2043.448	55.34	PK-U	31.7	-45.6	0	41.44	-	-	88.2	-46.76	267	125	V
	2043.429	43.49	ADR	31.7	-45.6	3.13	32.72	68.2	-35.48	-	-	267	125	V
4	* 4081.256	50.9	PK-U	35.1	-41.7	0	44.3	-	-	74	-29.7	190	338	V
	* 4080.522	38.58	ADR	35.1	-41.7	3.13	35.11	54	-18.89	-	-	190	338	V
5	12948.212	59.71	PK-U	39.4	-34.1	0	65.01	-	-	88.2	-23.19	258	197	H
	12948.475	44.6	ADR	39.4	-34.1	3.13	53.03	68.2	-15.17	-	-	258	197	H
6	12948.113	57.43	PK-U	39.4	-34.2	0	62.63	-	-	88.2	-25.57	217	204	V
	12950.007	44.44	ADR	39.4	-34.1	3.13	52.87	68.2	-15.33	-	-	217	204	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 3 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 8

HARMONICS AND SPURIOUS EMISSIONS

HIGH CHANNEL

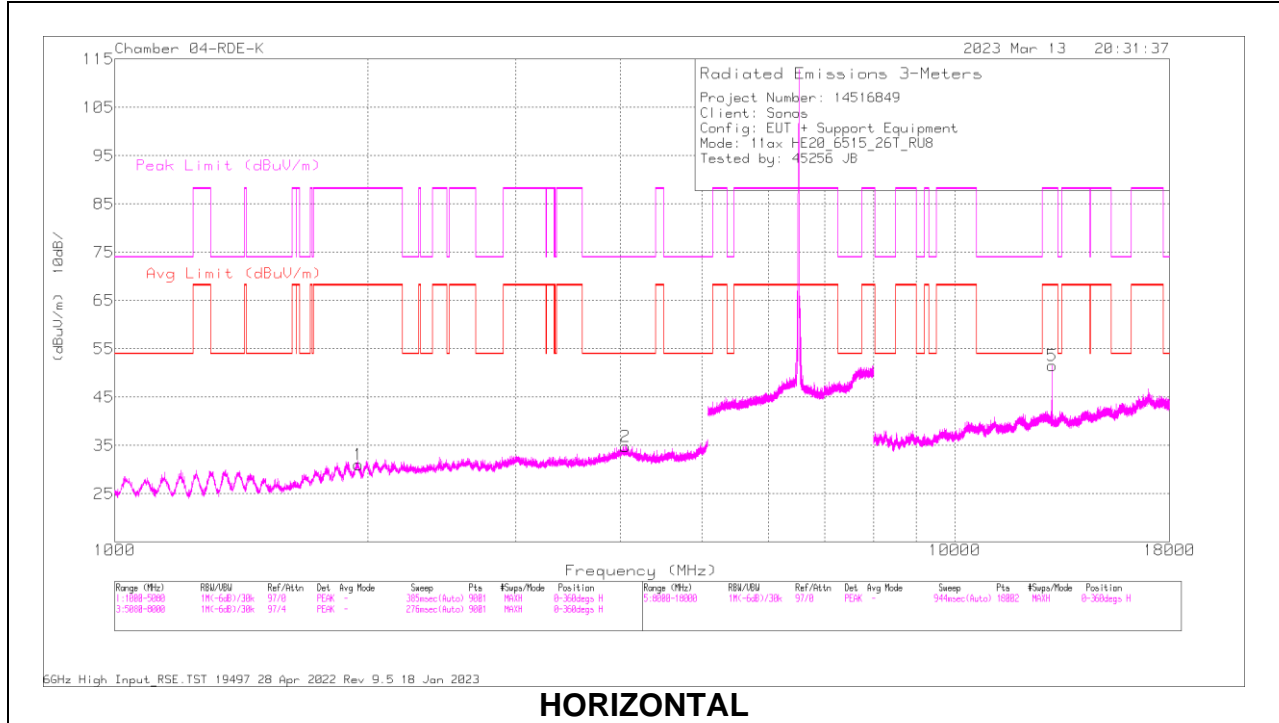

HORIZONTAL

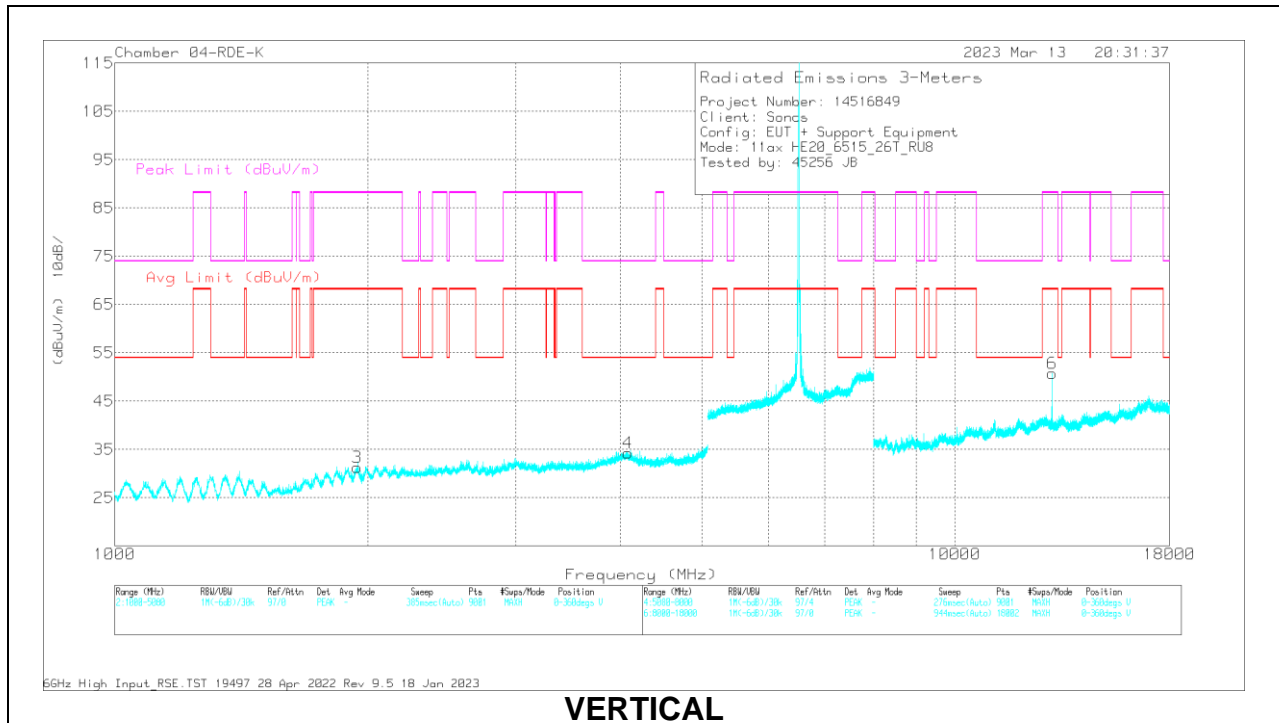

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cbl/Filtr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1946.553	55.44	PK-U	31.4	-45.3	0	41.54	-	-	88.2	-46.66	136	343	H
	1947.063	43.38	ADR	31.4	-45.2	3.13	32.71	68.2	-35.49	-	-	136	343	H
2	* 4051.735	50.51	PK-U	35.2	-41.6	0	44.11	-	-	74	-29.89	97	191	H
	* 4053.263	38.64	ADR	35.2	-41.7	3.13	35.27	54	-18.73	-	-	97	191	H
3	1941.043	55.48	PK-U	31.4	-45.1	0	41.78	-	-	88.2	-46.42	48	378	V
	1941.219	43.44	ADR	31.4	-45.2	3.13	32.77	68.2	-35.43	-	-	48	378	V
4	* 4081.552	50.36	PK-U	35.1	-41.7	0	43.76	-	-	74	-30.24	46	398	V
	* 4083.107	38.7	ADR	35.1	-41.7	3.13	35.23	54	-18.77	-	-	46	398	V
5	13048.116	58.26	PK-U	39.2	-34.3	0	63.16	-	-	88.2	-25.04	255	308	H
	13047.761	44.86	ADR	39.2	-34.3	3.13	52.89	68.2	-15.31	-	-	255	308	H
6	13048.158	58.59	PK-U	39.2	-34.3	0	63.49	-	-	88.2	-24.71	193	148	V
	13047.893	45.01	ADR	39.2	-34.3	3.13	53.04	68.2	-15.16	-	-	193	148	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 3 + Antenna 4 OFDMA MODE: 242-Tones, RU Index 61

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

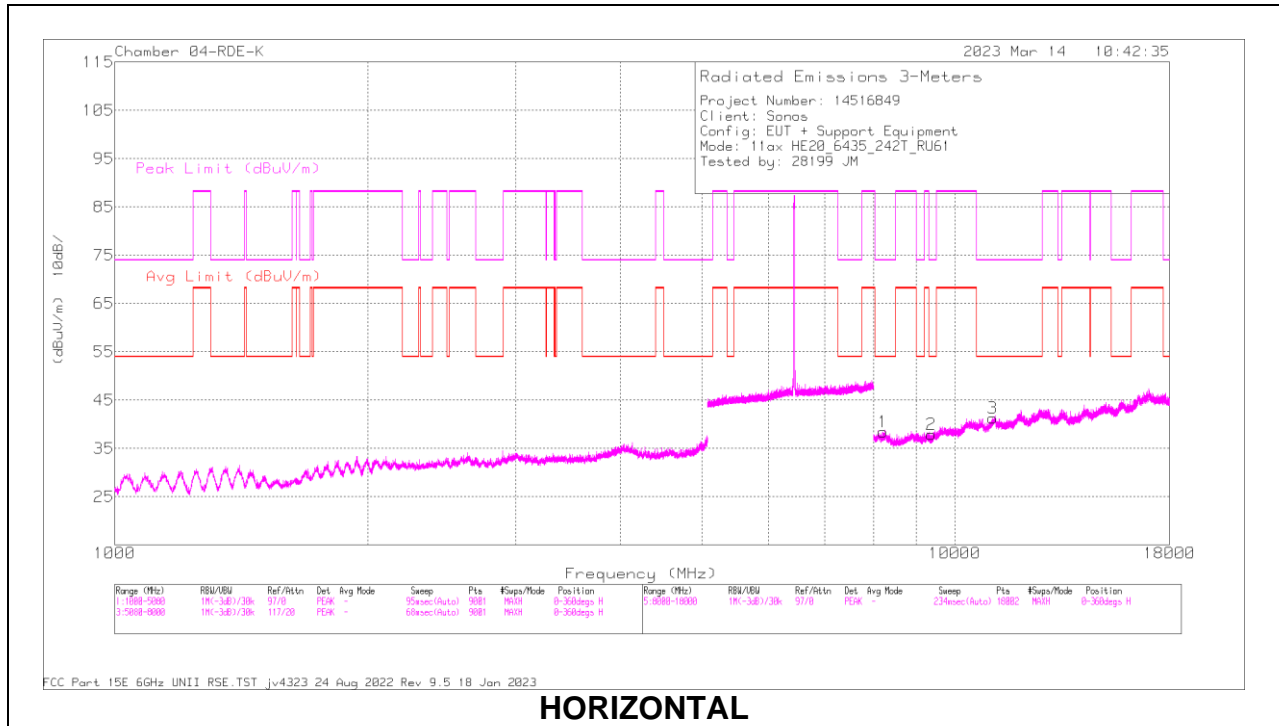

HORIZONTAL

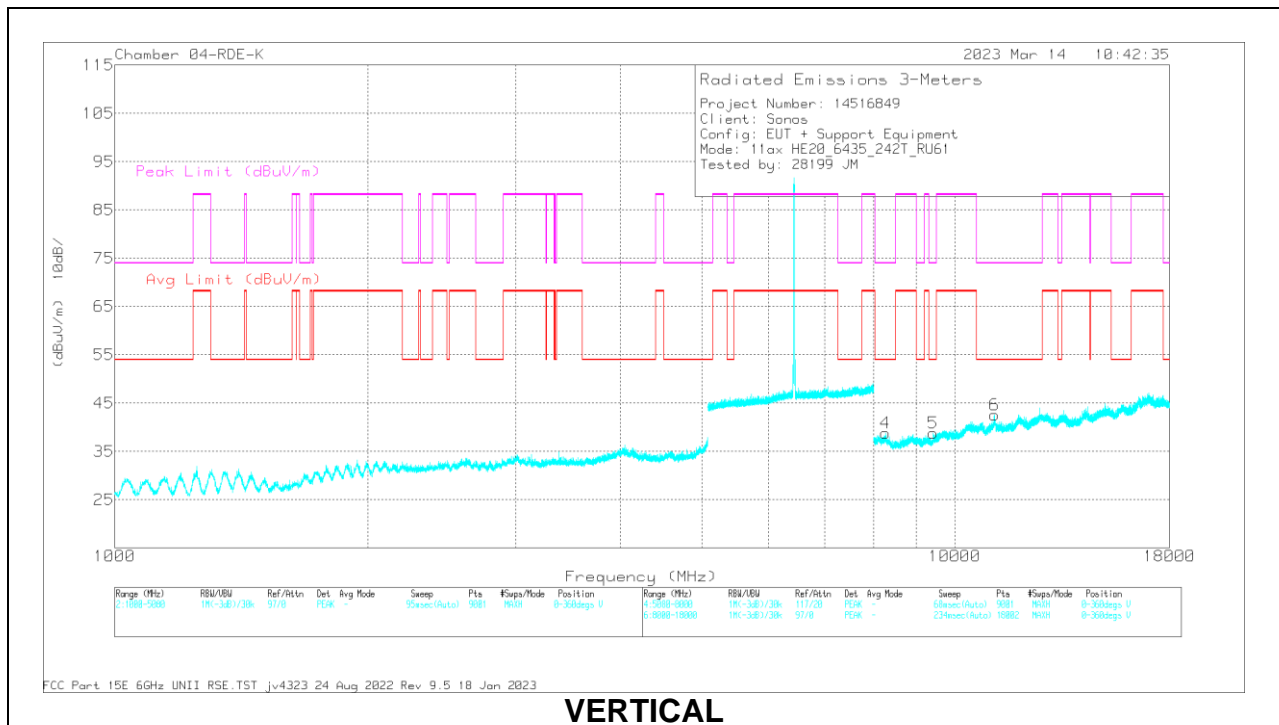

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cb/Filtr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 8207.354	49.43	PK-U	35.9	-37.1	0	48.23	-	-	74	-25.77	110	371	H
	* 8207.35	37.2	ADR	35.9	-37.1	4.17	40.17	54	-13.83	-	-	110	371	H
2	* 9377.886	47.5	PK-U	36.4	-36.7	0	47.2	-	-	74	-26.8	138	146	H
	* 9376.703	35.47	ADR	36.4	-36.7	4.17	39.34	54	-14.66	-	-	138	146	H
3	* 11096.468	48.42	PK-U	38	-36.1	0	50.32	-	-	74	-23.68	72	232	H
	* 11096.785	36.81	ADR	38	-36.2	4.17	42.78	54	-11.22	-	-	72	232	H
4	* 8264.768	49.24	PK-U	35.9	-36.8	0	48.34	-	-	74	-25.66	313	376	V
	* 8267.851	37.2	ADR	35.9	-36.8	4.17	40.47	54	-13.53	-	-	313	376	V
5	* 9427.923	48.53	PK-U	36.5	-36.6	0	48.43	-	-	74	-25.57	18	332	V
	* 9428.067	35.89	ADR	36.5	-36.6	4.17	39.96	54	-14.04	-	-	18	332	V
6	* 11154.579	48.21	PK-U	38	-35.4	0	50.81	-	-	74	-23.19	25	130	V
	* 11154.186	36.54	ADR	38	-35.4	4.17	43.31	54	-10.69	-	-	25	130	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL

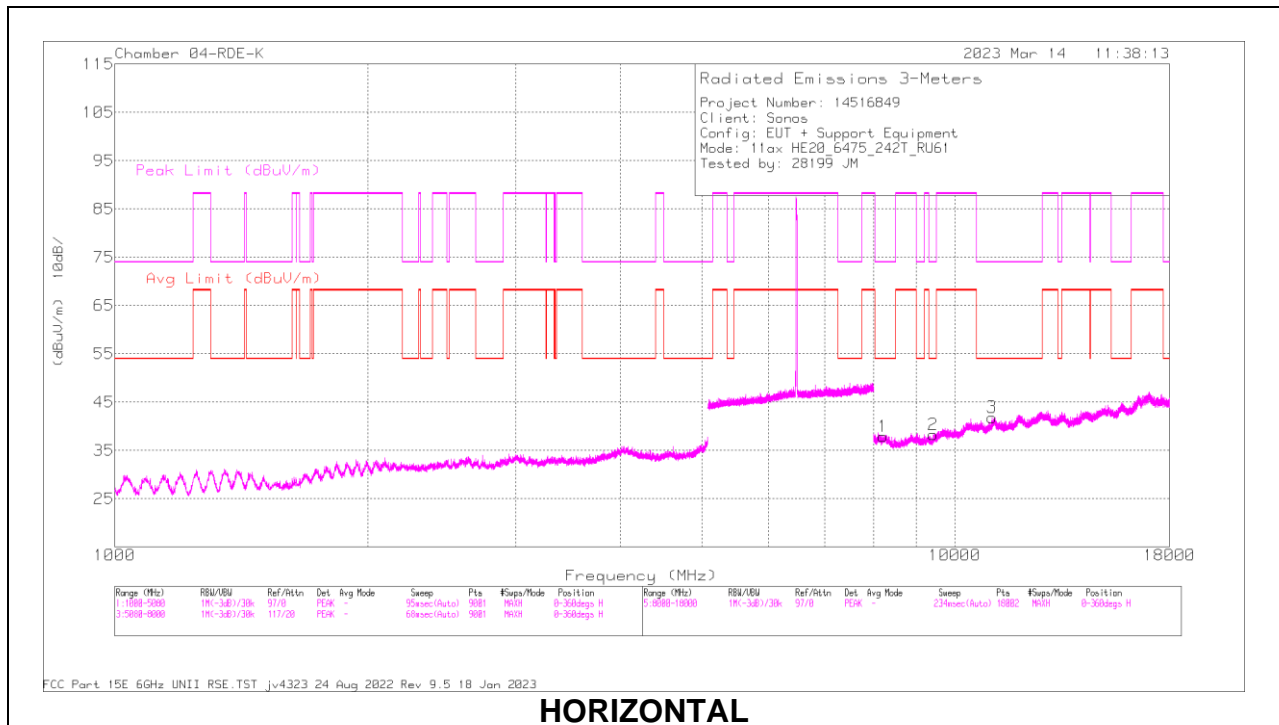

HORIZONTAL

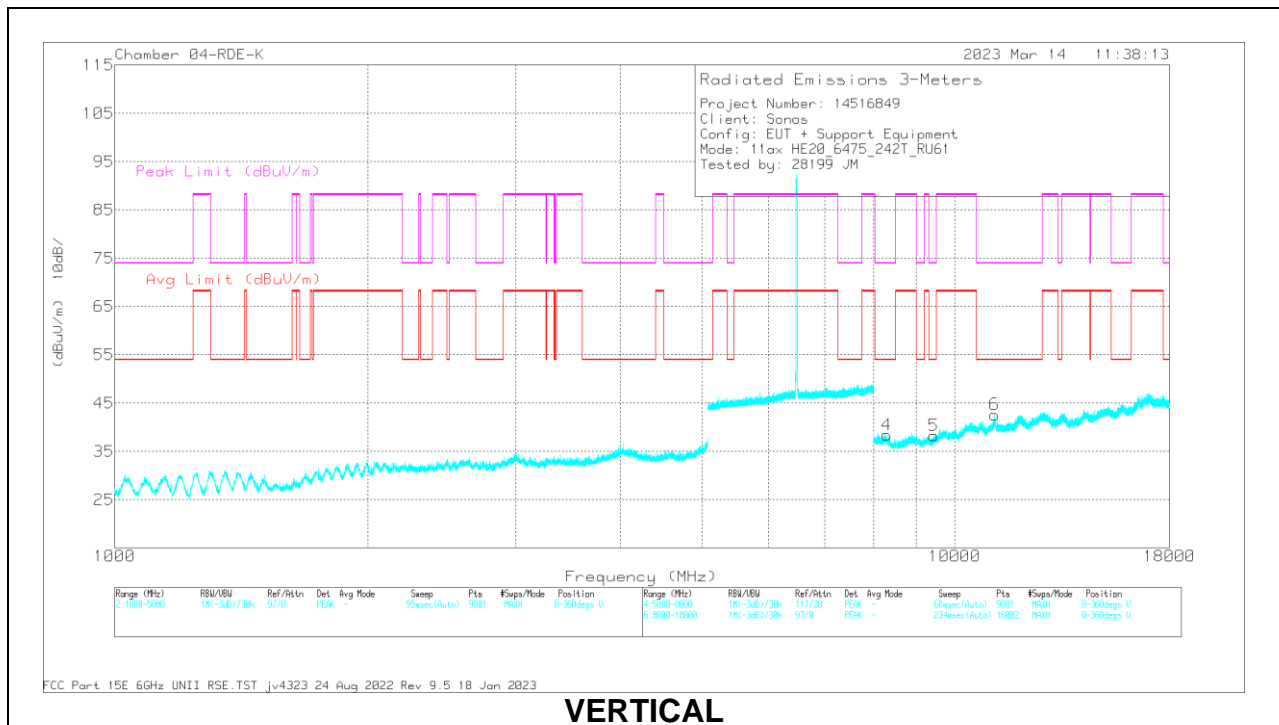

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cb/Fitr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 8215.348	49.63	PK-U	35.9	-37.1	0	48.43	-	-	74	-25.57	306	301	H
	* 8215.718	37.35	ADR	35.9	-37.1	4.17	40.32	54	-13.68	-	-	306	301	H
2	* 9420.012	47.95	PK-U	36.5	-36.7	0	47.75	-	-	74	-26.25	135	304	H
	* 9419.465	35.75	ADR	36.5	-36.7	4.17	39.72	54	-14.28	-	-	135	304	H
3	* 11067.701	48.65	PK-U	38	-36.4	0	50.25	-	-	74	-23.75	5	126	H
	* 11068.589	36.78	ADR	38	-36.4	4.17	42.55	54	-11.45	-	-	5	126	H
4	* 8294.25	49.07	PK-U	35.9	-37.2	0	47.77	-	-	74	-26.23	228	293	V
	* 8293.445	37.09	ADR	35.9	-37.2	4.17	39.96	54	-14.04	-	-	228	293	V
5	* 9441.199	47.96	PK-U	36.5	-36.5	0	47.96	-	-	74	-26.04	284	242	V
	* 9438.521	35.97	ADR	36.5	-36.4	4.17	40.24	54	-13.76	-	-	284	242	V
6	* 11149.4	48.47	PK-U	38	-35.6	0	50.87	-	-	74	-23.13	283	239	V
	* 11148.595	36.65	ADR	38	-35.6	4.17	43.22	54	-10.78	-	-	283	239	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL

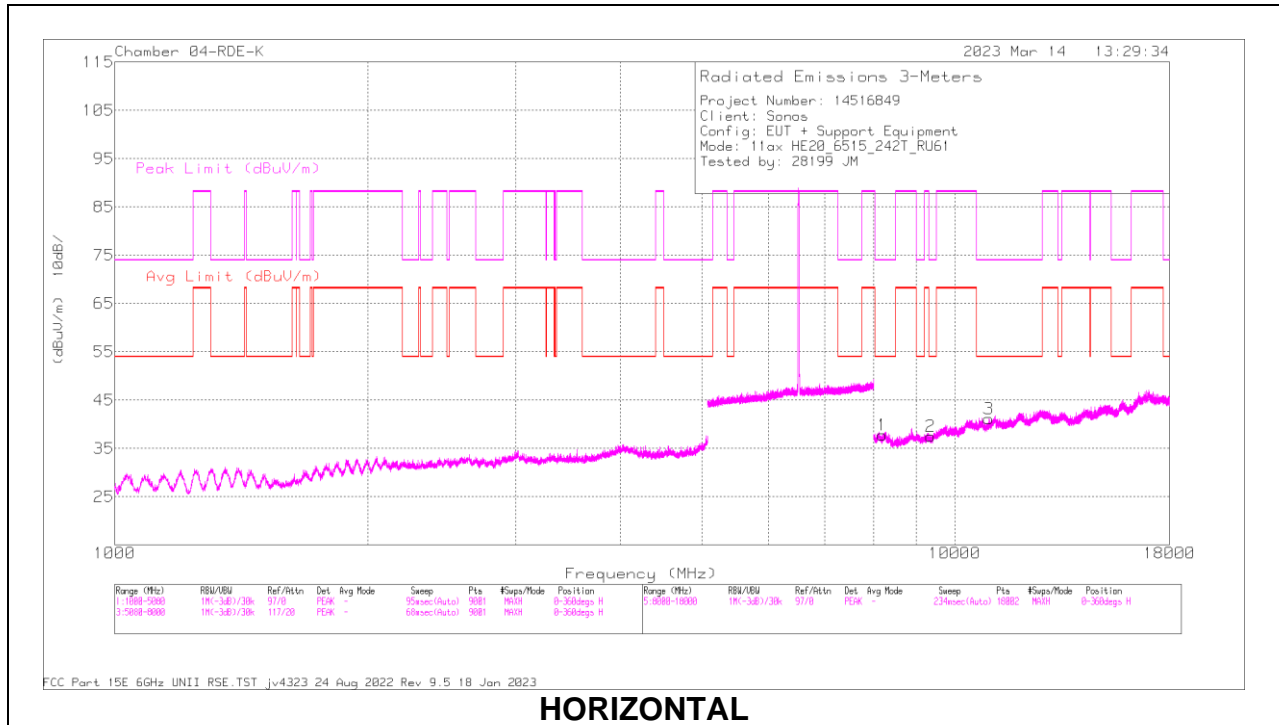

HORIZONTAL

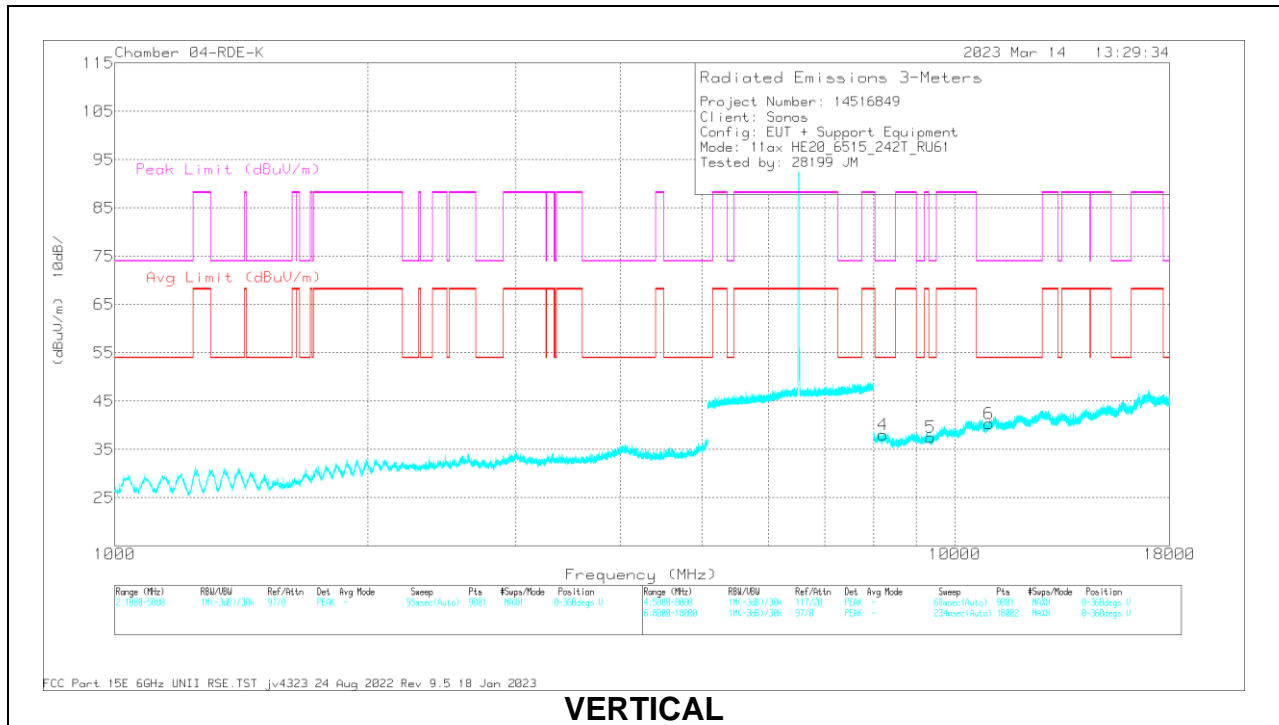

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cb/Fitr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 8197.767	49.65	PK-U	35.9	-37.2	0	48.35	-	-	74	-25.65	358	228	H
	* 8199.498	37.06	ADR	35.9	-37.2	4.17	39.93	54	-14.07	-	-	358	228	H
2	* 9358.341	47.57	PK-U	36.4	-36.7	0	47.27	-	-	74	-26.73	255	165	H
	* 9359.533	35.52	ADR	36.4	-36.7	4.17	39.39	54	-14.61	-	-	255	165	H
3	* 10967.052	48.4	PK-U	38	-36.5	0	49.9	-	-	74	-24.1	221	194	H
	* 10965.383	36.07	ADR	38	-36.5	4.17	41.74	54	-12.26	-	-	221	194	H
4	* 8203.628	49.03	PK-U	35.9	-37.2	0	47.73	-	-	74	-26.27	121	371	V
	* 8205.078	37.17	ADR	35.9	-37.2	4.17	40.04	54	-13.96	-	-	121	371	V
5	* 9360.678	47.5	PK-U	36.4	-36.7	0	47.2	-	-	74	-26.8	46	364	V
	* 9358.489	35.48	ADR	36.4	-36.7	4.17	39.35	54	-14.65	-	-	46	364	V
6	* 10978.755	48.36	PK-U	38	-36.6	0	49.76	-	-	74	-24.24	125	256	V
	* 10979.421	36	ADR	38	-36.6	4.17	41.57	54	-12.43	-	-	125	256	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.5. TX ABOVE 1 GHz 802.11ax HE40 MODE IN THE UNII-6 BAND


2TX Antenna 3 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 0

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

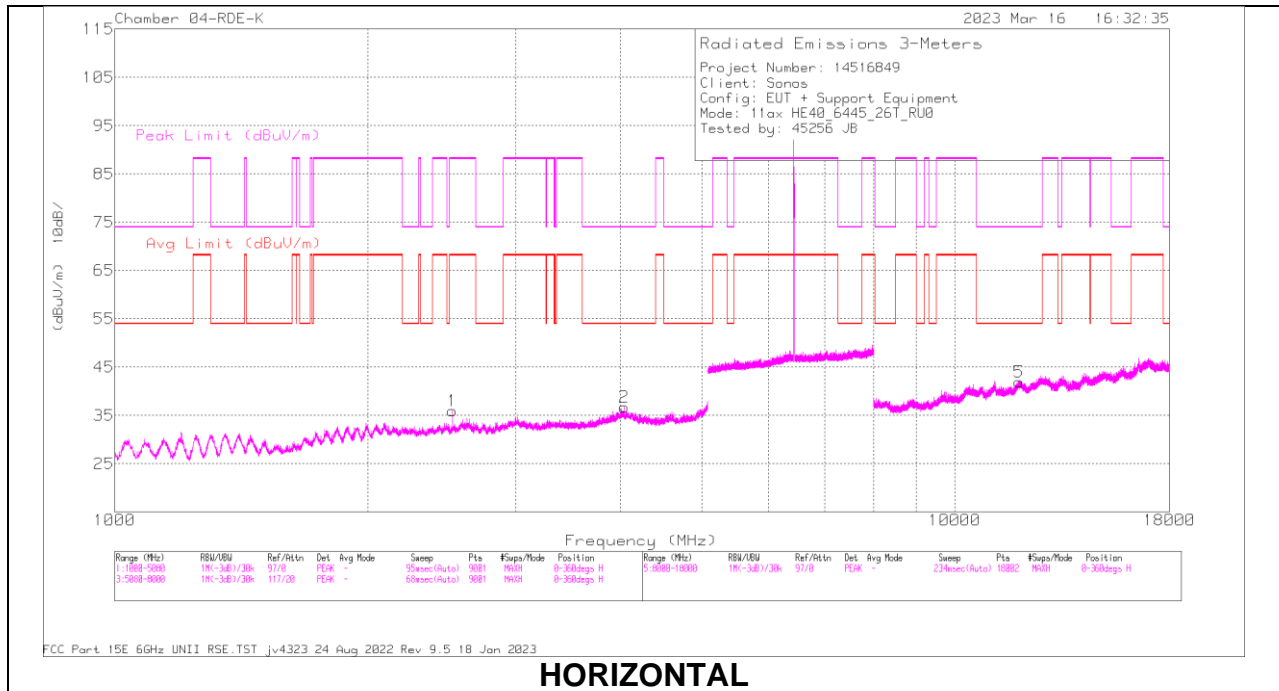

HORIZONTAL

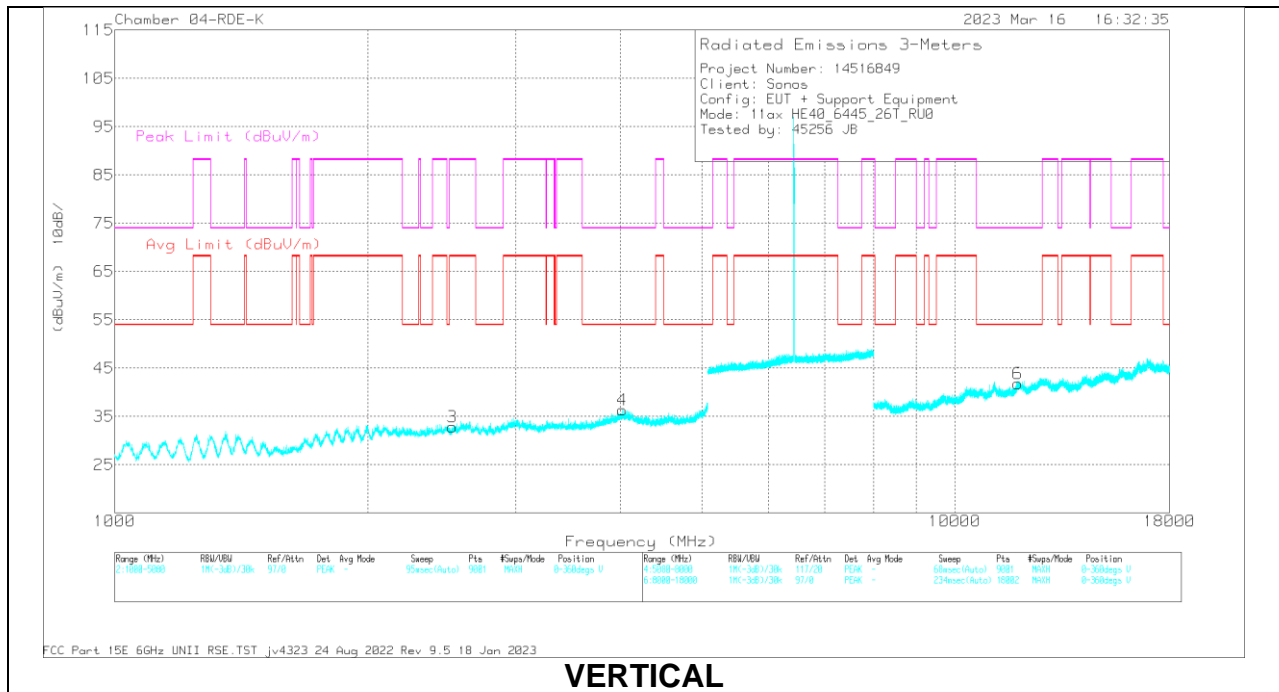

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cb/Filtr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2521.974	54.97	PK-U	32.2	-44.1	0	43.07	-	-	88.2	-45.13	2	131	H
	2521.61	43.04	ADR	32.2	-44.1	3.09	34.23	68.2	-33.97	-	-	2	131	H
2	* 4036.092	52.13	PK-U	35.2	-41.6	0	45.73	-	-	74	-28.27	349	245	H
	* 4038.384	40.3	ADR	35.2	-41.6	3.09	36.99	54	-17.01	-	-	349	245	H
3	2520.823	61.83	PK-U	32.2	-44.1	0	49.93	-	-	88.2	-38.27	206	136	V
	2522.854	43.31	ADR	32.2	-44.1	3.09	34.5	68.2	-33.7	-	-	206	136	V
4	* 4014.17	52.65	PK-U	35.2	-41.6	0	46.25	-	-	74	-27.75	188	149	V
	* 4016.465	40.31	ADR	35.2	-41.7	3.09	36.9	54	-17.1	-	-	188	149	V
5	* 11918.111	47.34	PK-U	38.5	-34.7	0	51.14	-	-	74	-22.86	345	218	H
	* 11915.776	35.57	ADR	38.5	-34.7	3.09	42.46	54	-11.54	-	-	345	218	H
6	* 11879.577	47.52	PK-U	38.4	-35	0	50.92	-	-	74	-23.08	122	248	V
	* 11879.047	35.75	ADR	38.4	-35	3.09	42.24	54	-11.76	-	-	122	248	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 3 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 17

HARMONICS AND SPURIOUS EMISSIONS

HIGH CHANNEL

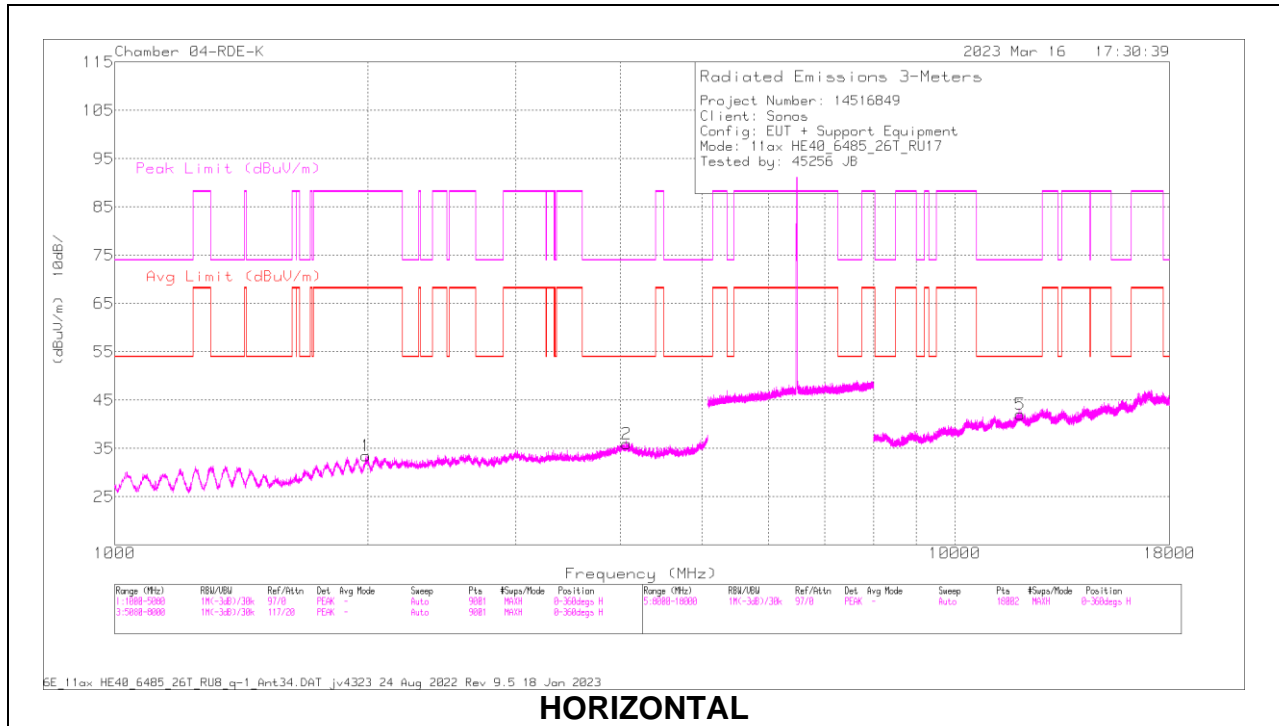

HORIZONTAL

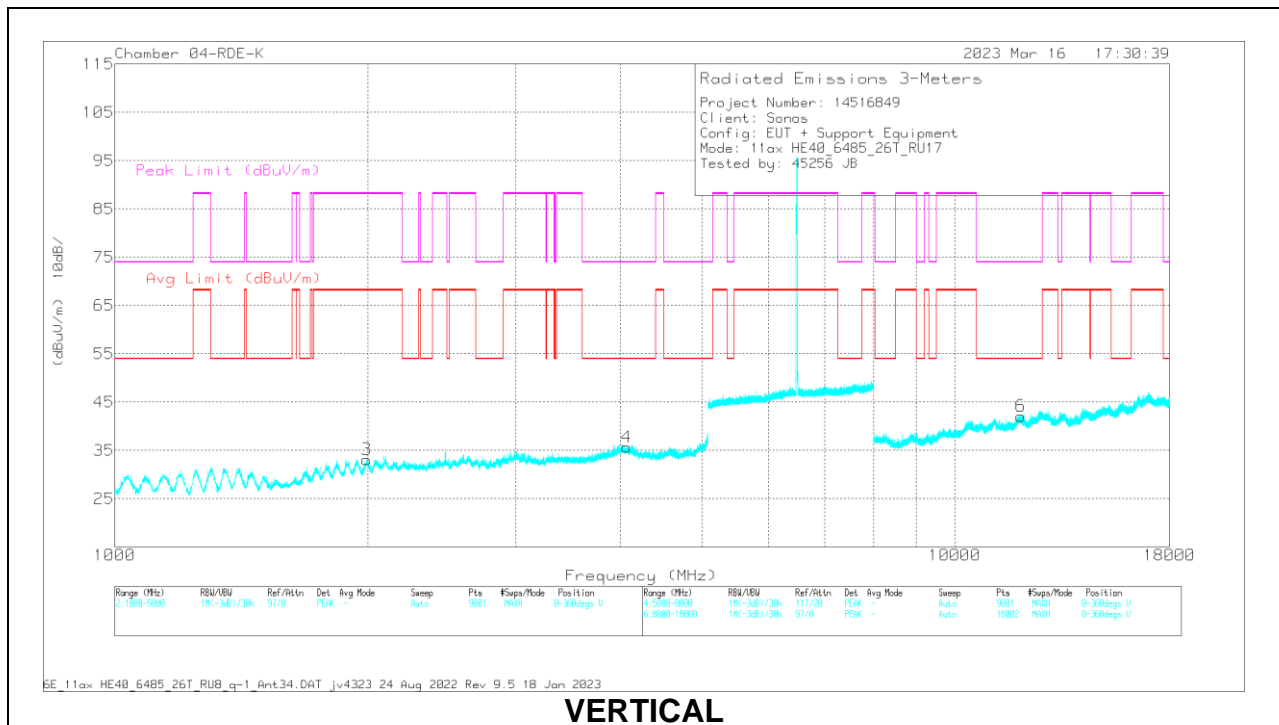

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cb/Filtr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1993.963	56.81	PK-U	31.6	-45.5	0	42.91	-	-	88.2	-45.29	48	383	H
	1994.453	45.06	ADR	31.6	-45.6	3.09	34.15	68.2	-34.05	-	-	48	383	H
2	* 4065.382	52.33	PK-U	35.2	-41.6	0	45.93	-	-	74	-28.07	210	251	H
	* 4068.23	40.35	ADR	35.2	-41.6	3.09	37.04	54	-16.96	-	-	210	251	H
3	1992.732	57.13	PK-U	31.6	-45.4	0	43.33	-	-	88.2	-44.87	27	364	V
	1992.227	45.04	ADR	31.6	-45.4	3.09	34.33	68.2	-33.87	-	-	27	364	V
4	* 4067.631	52.29	PK-U	35.2	-41.6	0	45.89	-	-	74	-28.11	215	335	V
	* 4065.333	40.4	ADR	35.2	-41.6	3.09	37.09	54	-16.91	-	-	215	335	V
5	* 11950.637	47.34	PK-U	38.6	-34.4	0	51.54	-	-	74	-22.46	20	320	H
	* 11952.325	35.38	ADR	38.6	-34.3	3.09	42.77	54	-11.23	-	-	20	320	H
6	* 11981.235	47.39	PK-U	38.6	-34.4	0	51.59	-	-	74	-22.41	344	222	V
	* 11979.084	35.39	ADR	38.6	-34.4	3.09	42.68	54	-11.32	-	-	344	222	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STRADDLE CHANNEL

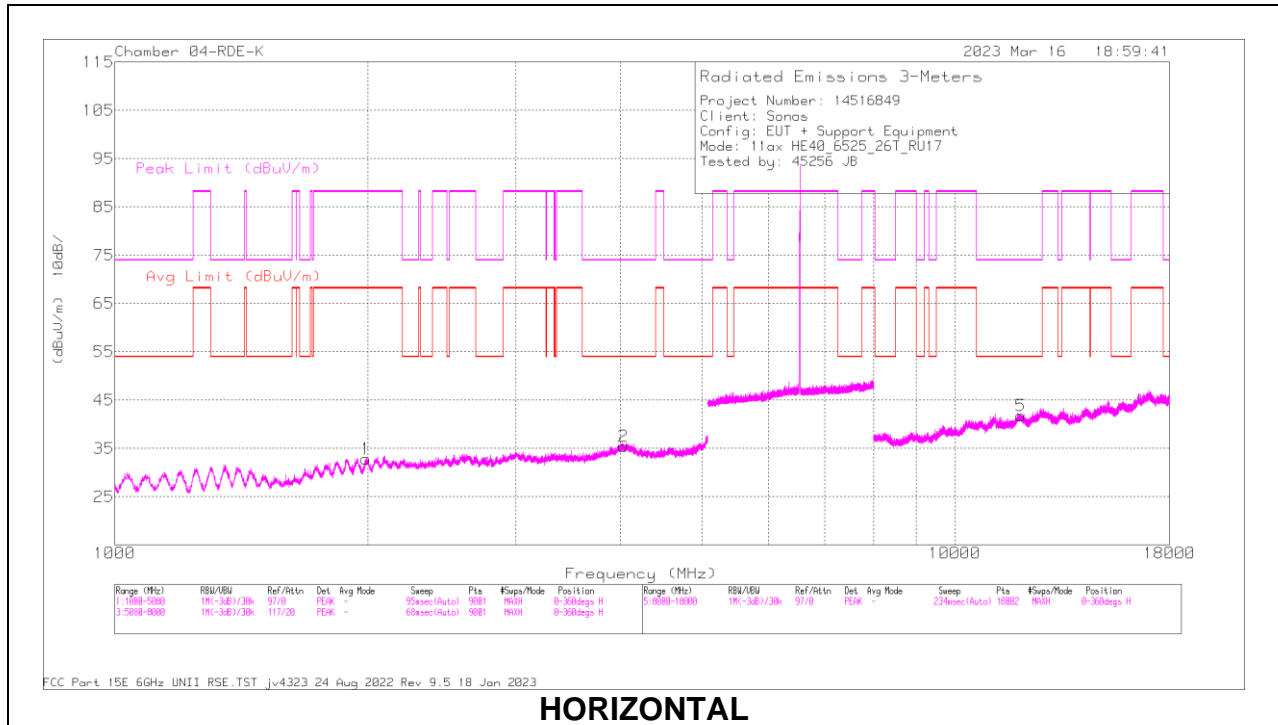

HORIZONTAL

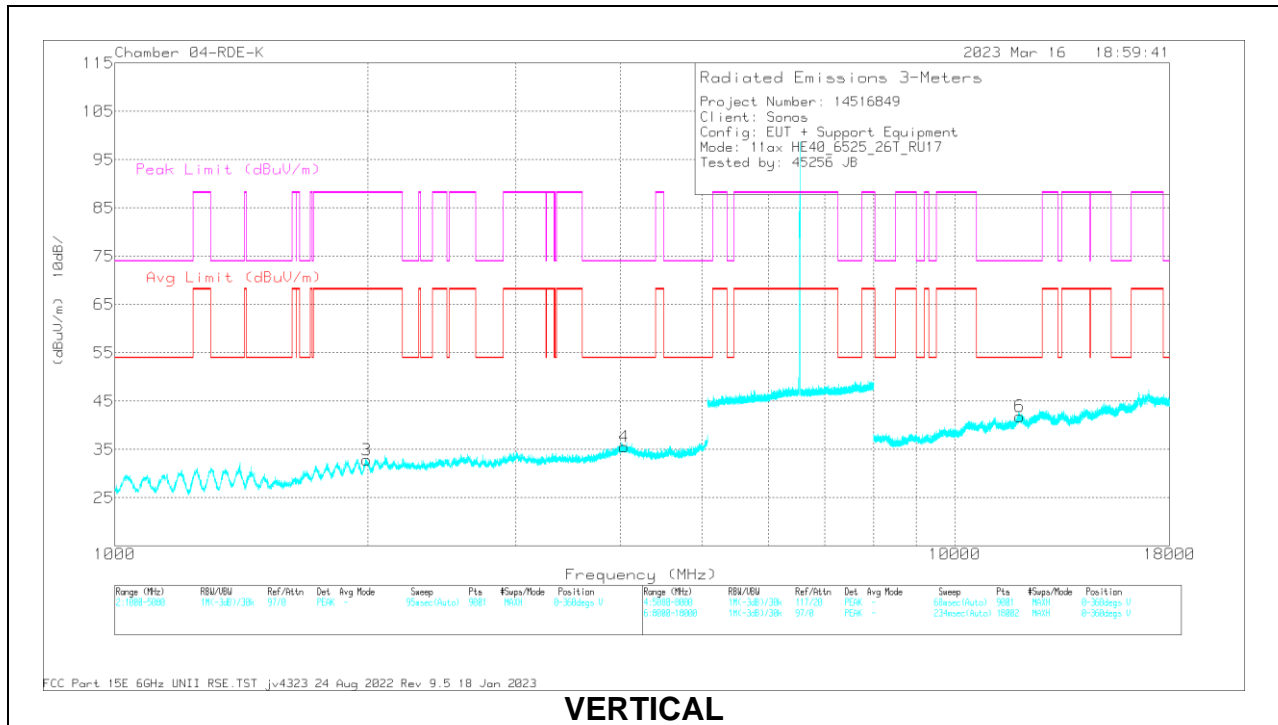

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cb/Filtr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1991.424	57.02	PK-U	31.6	-45.4	0	43.22	-	-	88.2	-44.98	50	275	H
	1990.923	44.77	ADR	31.6	-45.4	3.09	34.06	68.2	-34.14	-	-	50	275	H
2	* 4034.738	52.29	PK-U	35.2	-41.7	0	45.79	-	-	74	-28.21	342	172	H
	* 4033.943	40.32	ADR	35.2	-41.7	3.09	36.91	54	-17.09	-	-	342	172	H
3	1995.914	56.92	PK-U	31.6	-45.7	0	42.82	-	-	88.2	-45.38	208	189	V
	1995.488	45.03	ADR	31.6	-45.7	3.09	34.02	68.2	-34.18	-	-	208	189	V
4	* 4038.759	51.83	PK-U	35.2	-41.6	0	45.43	-	-	74	-28.57	330	191	V
	* 4038.298	40.11	ADR	35.2	-41.6	3.09	36.8	54	-17.2	-	-	330	191	V
5	* 11988.931	47.25	PK-U	38.6	-34.4	0	51.45	-	-	74	-22.55	323	193	H
	* 11989.304	35.23	ADR	38.6	-34.4	3.09	42.52	54	-11.48	-	-	323	193	H
6	* 11935.285	47.24	PK-U	38.5	-34.6	0	51.14	-	-	74	-22.96	18	295	V
	* 11936.417	35.69	ADR	38.5	-34.6	3.09	42.68	54	-11.32	-	-	18	295	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 3 + Antenna 4 OFDMA MODE: 484-Tones, RU Index 65

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

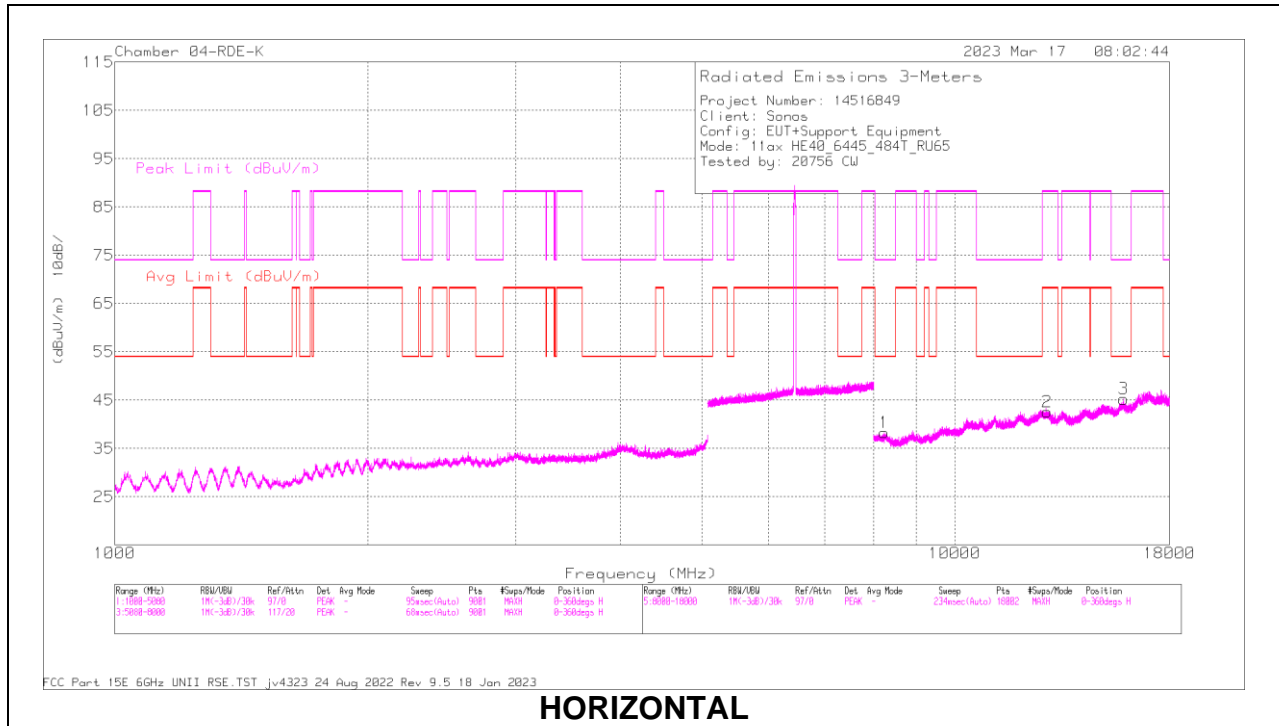

HORIZONTAL

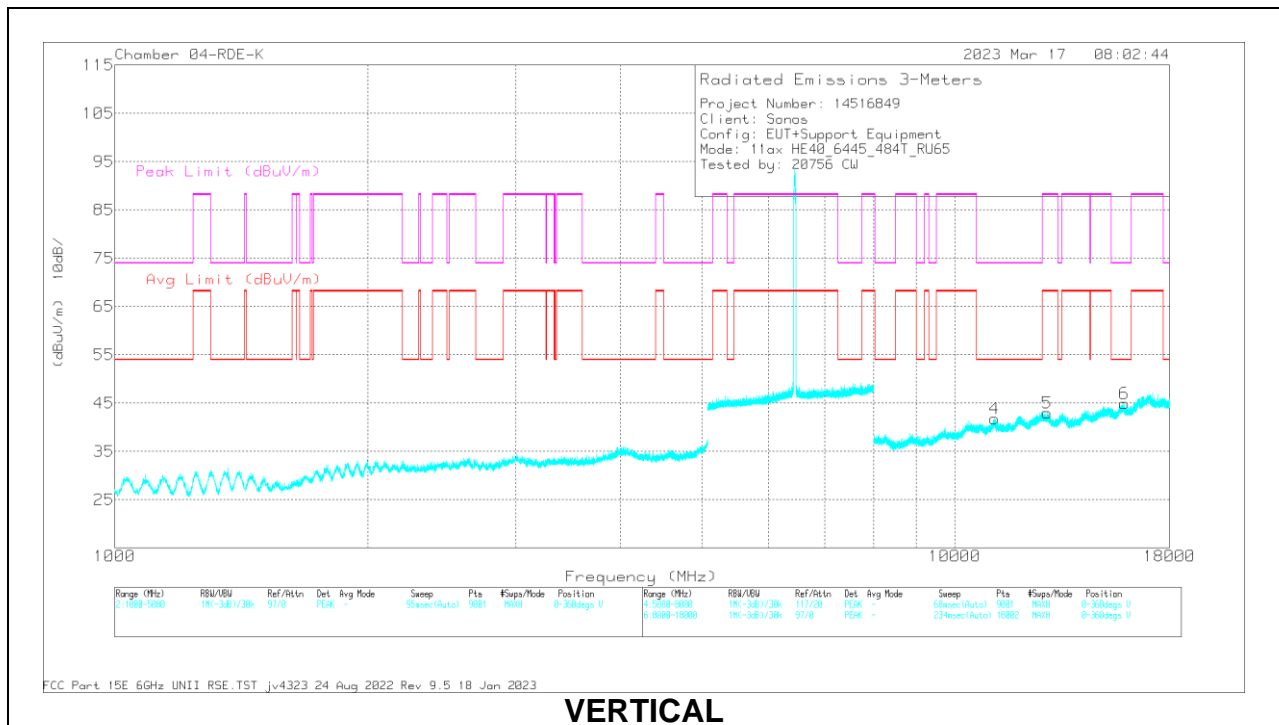

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cb/Fitr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 8234.57	49.76	PK-U	35.9	-37.1	0	48.56	-	-	74	-25.44	73	142	H
	* 8232.72	37.14	ADR	35.9	-37.2	4.24	40.08	54	-13.92	-	-	73	142	H
2	12878.172	46.5	PK-U	39.4	-34.3	0	51.6	-	-	88.2	-36.6	98	116	H
	12878.328	34.59	ADR	39.4	-34.3	4.24	43.93	68.2	-24.27	-	-	98	116	H
3	* 15870.731	47.54	PK-U	40.2	-33.1	0	54.64	-	-	74	-19.36	6	245	H
	* 15870.908	35.25	ADR	40.2	-33.1	4.24	46.59	54	-7.41	-	-	6	245	H
4	* 11153.872	48.55	PK-U	38	-35.4	0	51.15	-	-	74	-22.85	182	267	V
	* 11153.894	36.66	ADR	38	-35.4	4.24	43.5	54	-10.5	-	-	182	267	V
5	12877.387	46.97	PK-U	39.4	-34.4	0	51.97	-	-	88.2	-36.23	16	364	V
	12877.51	34.73	ADR	39.4	-34.4	4.24	43.97	68.2	-24.23	-	-	16	364	V
6	* 15896.316	47.72	PK-U	40.2	-33.3	0	54.62	-	-	74	-19.38	84	340	V
	* 15895.942	35.13	ADR	40.2	-33.3	4.24	46.27	54	-7.73	-	-	84	340	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL

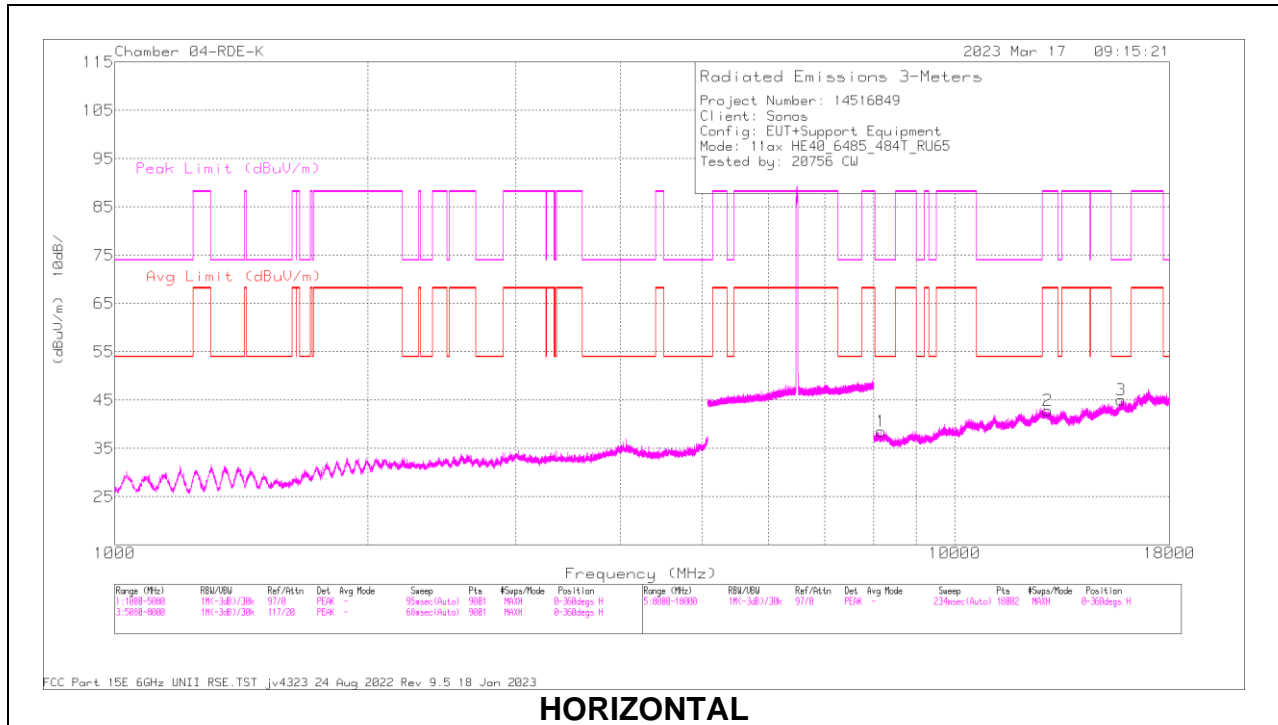

HORIZONTAL

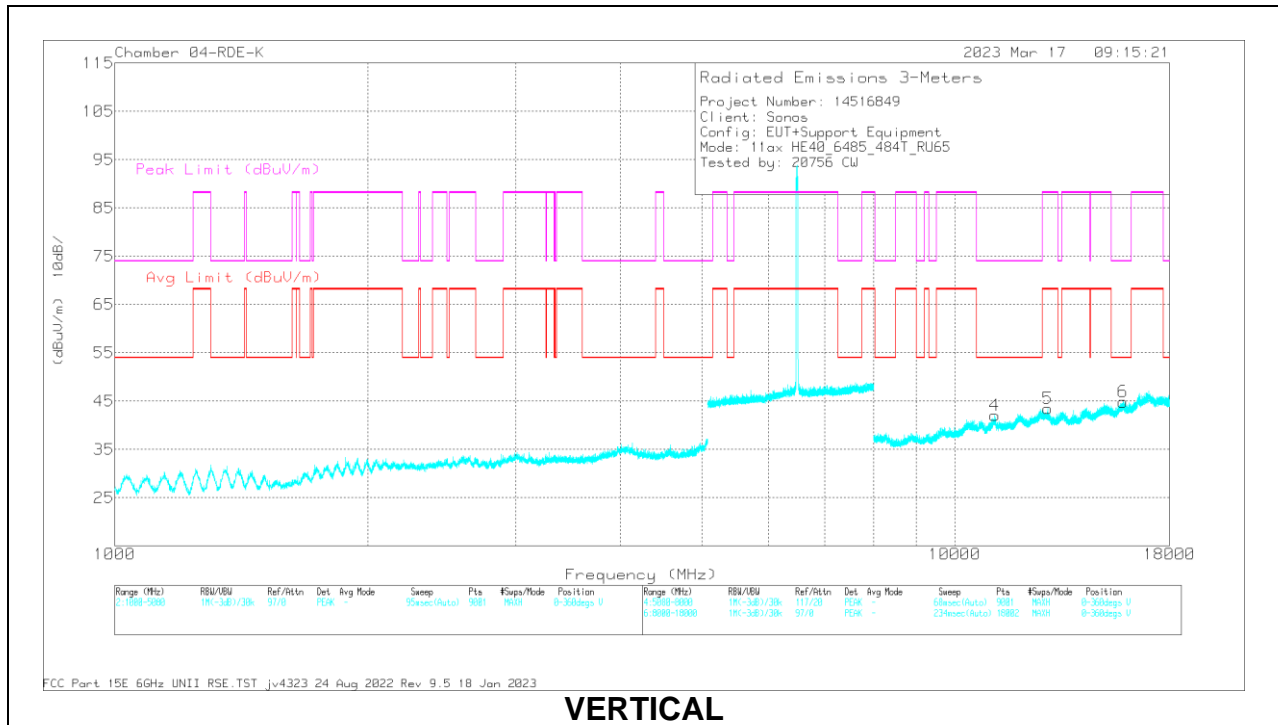

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cb/Fitr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 8163.243	49.31	PK-U	35.9	-37.5	0	47.71	-	-	74	-26.29	67	392	H
	* 8164.312	37.48	ADR	35.9	-37.4	4.24	40.22	54	-13.78	-	-	67	392	H
2	12901.006	46.65	PK-U	39.4	-34.1	0	51.95	-	-	88.2	-36.25	183	363	H
	12900.972	34.67	ADR	39.4	-34.1	4.24	44.21	68.2	-23.99	-	-	183	363	H
3	* 15780.893	47.04	PK-U	40.2	-33.5	0	53.74	-	-	74	-20.26	245	378	H
	* 15781.039	35.39	ADR	40.2	-33.5	4.24	46.33	54	-7.67	-	-	245	378	H
4	* 11157.093	48.95	PK-U	38	-35.4	0	51.55	-	-	74	-22.45	111	300	V
	* 11157.089	36.58	ADR	38	-35.4	4.24	43.42	54	-10.58	-	-	111	300	V
5	12908.327	47.09	PK-U	39.4	-34.1	0	52.39	-	-	88.2	-35.81	217	355	V
	12908.278	34.71	ADR	39.4	-34.1	4.24	44.25	68.2	-23.95	-	-	217	355	V
6	* 15846.479	47.32	PK-U	40.2	-33.3	0	54.22	-	-	74	-19.78	129	135	V
	* 15846.133	35.34	ADR	40.2	-33.3	4.24	46.48	54	-7.52	-	-	129	135	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STRADDLE CHANNEL

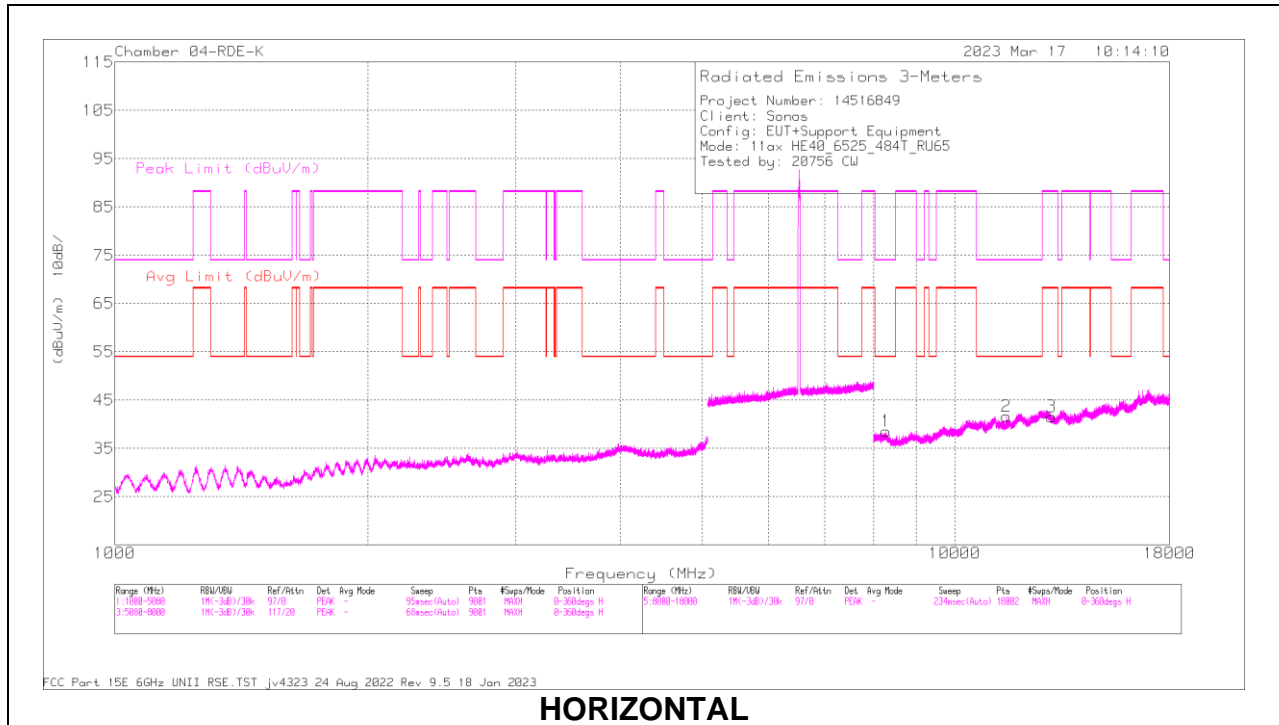

HORIZONTAL

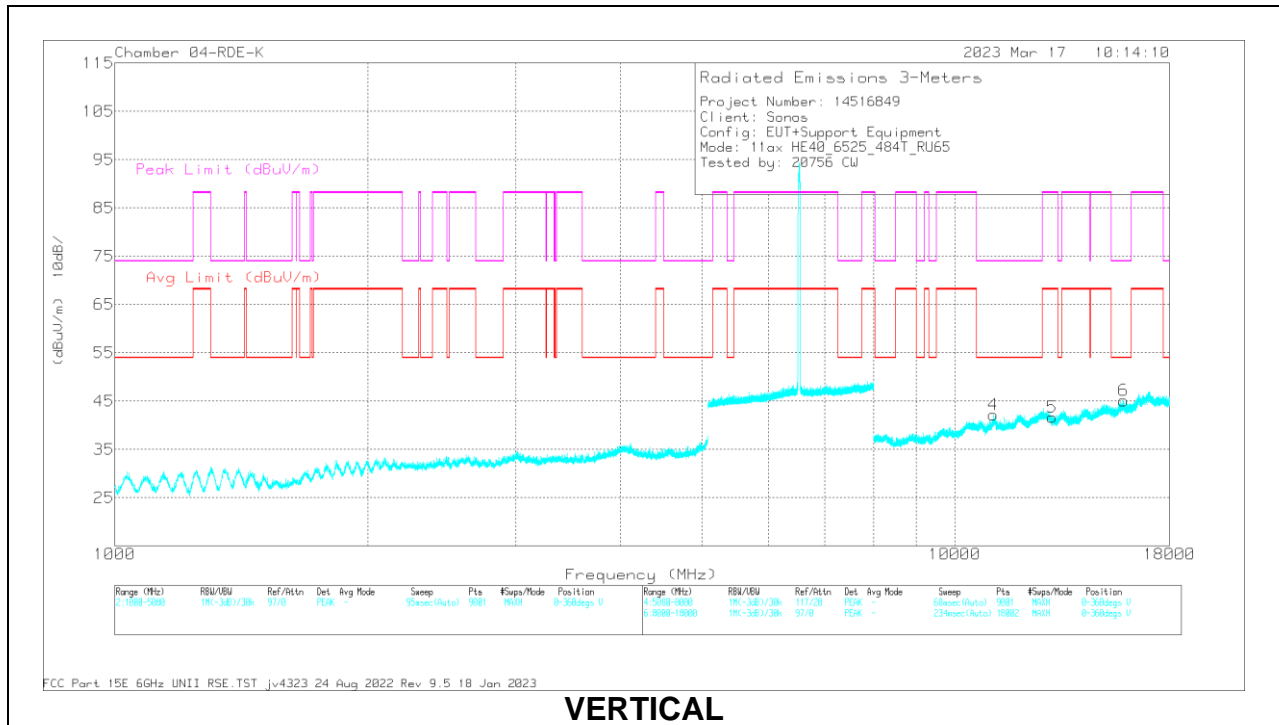

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cb/Fitr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 8274.982	49.63	PK-U	35.9	-36.8	0	48.73	-	-	74	-25.27	182	218	H
	* 8276.708	37.18	ADR	35.9	-36.8	4.24	40.52	54	-13.48	-	-	182	218	H
2	* 11525.304	47.94	PK-U	37.9	-35.6	0	50.24	-	-	74	-23.76	294	297	H
	* 11525.53	35.77	ADR	37.9	-35.6	4.24	42.31	54	-11.69	-	-	294	297	H
3	13030.841	47.3	PK-U	39.3	-34.1	0	52.5	-	-	88.2	-35.7	12	302	H
	13030.956	34.6	ADR	39.3	-34.1	4.24	44.04	68.2	-24.16	-	-	12	302	H
4	* 11114.221	48.35	PK-U	38	-36.1	0	50.25	-	-	74	-23.75	156	163	V
	* 11113.481	36.76	ADR	38	-36.1	4.24	42.9	54	-11.1	-	-	156	163	V
5	13053.481	46.64	PK-U	39.2	-34.3	0	51.54	-	-	88.2	-36.66	2	242	V
	13053.375	34.74	ADR	39.2	-34.3	4.24	43.88	68.2	-24.32	-	-	2	242	V
6	* 15869.837	47.01	PK-U	40.2	-33.1	0	54.11	-	-	74	-19.89	100	241	V
	* 15869.621	35.27	ADR	40.2	-33.1	4.24	46.61	54	-7.39	-	-	100	241	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.6. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE UNII-6 BAND


2TX Antenna 3 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 0

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL

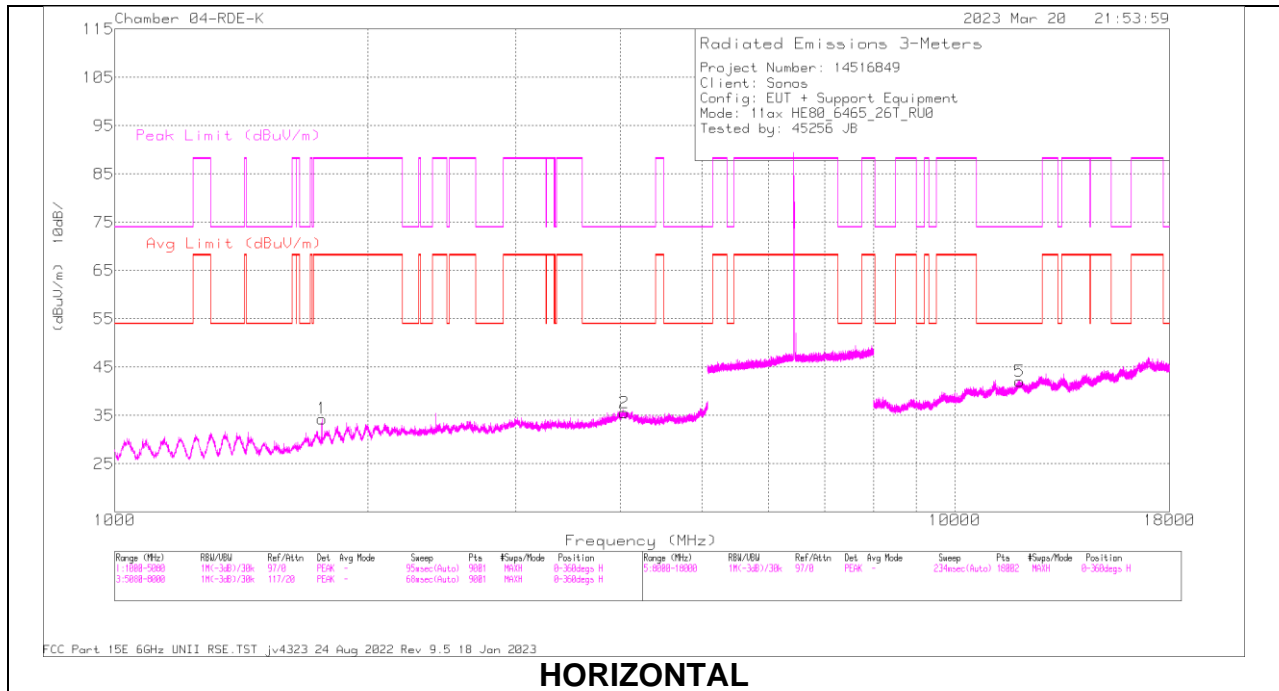

HORIZONTAL

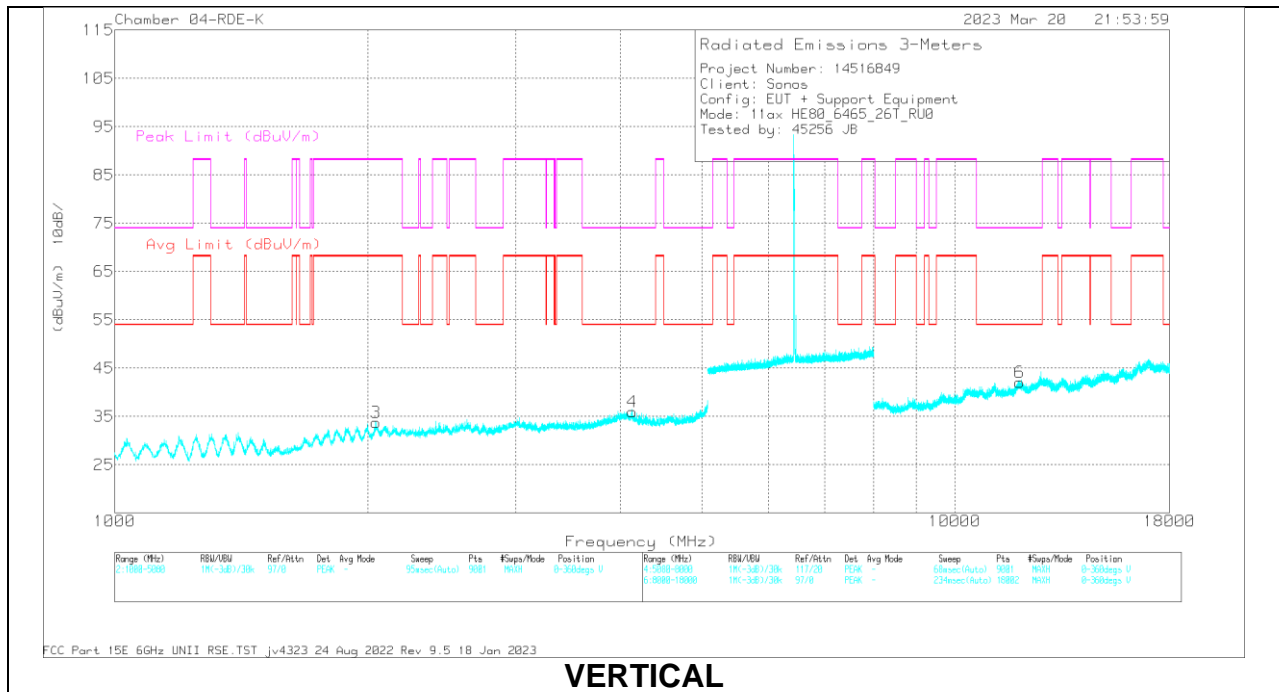

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cb/Filtr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1762.36	63.44	PK-U	29.8	-46	0	47.24	-	-	88.2	-40.96	2	125	H
	1760.112	45.27	ADR	29.8	-46.1	3.12	32.09	68.2	-36.11	-	-	2	125	H
2	* 4043.456	51.81	PK-U	35.2	-41.7	0	45.31	-	-	74	-28.69	132	104	H
	* 4039.839	40.19	ADR	35.2	-41.6	3.12	36.91	54	-17.09	-	-	132	104	H
3	2047.555	57.23	PK-U	31.7	-45.8	0	43.13	-	-	88.2	-45.07	43	275	V
	2046.289	45.27	ADR	31.7	-45.7	3.12	34.39	68.2	-33.81	-	-	43	275	V
4	* 4129.124	52.14	PK-U	34.8	-41.6	0	45.34	-	-	74	-28.66	275	271	V
	* 4131.56	40.45	ADR	34.8	-41.6	3.12	36.77	54	-17.23	-	-	275	271	V
5	* 11934.939	47.5	PK-U	38.5	-34.7	0	51.3	-	-	74	-22.7	175	344	H
	* 11934.422	35.5	ADR	38.5	-34.7	3.12	42.42	54	-11.58	-	-	175	344	H
6	* 11936.534	47.44	PK-U	38.5	-34.6	0	51.34	-	-	74	-22.66	25	232	V
	* 11937.691	35.49	ADR	38.5	-34.6	3.12	42.51	54	-11.49	-	-	25	232	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 3 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 18

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL

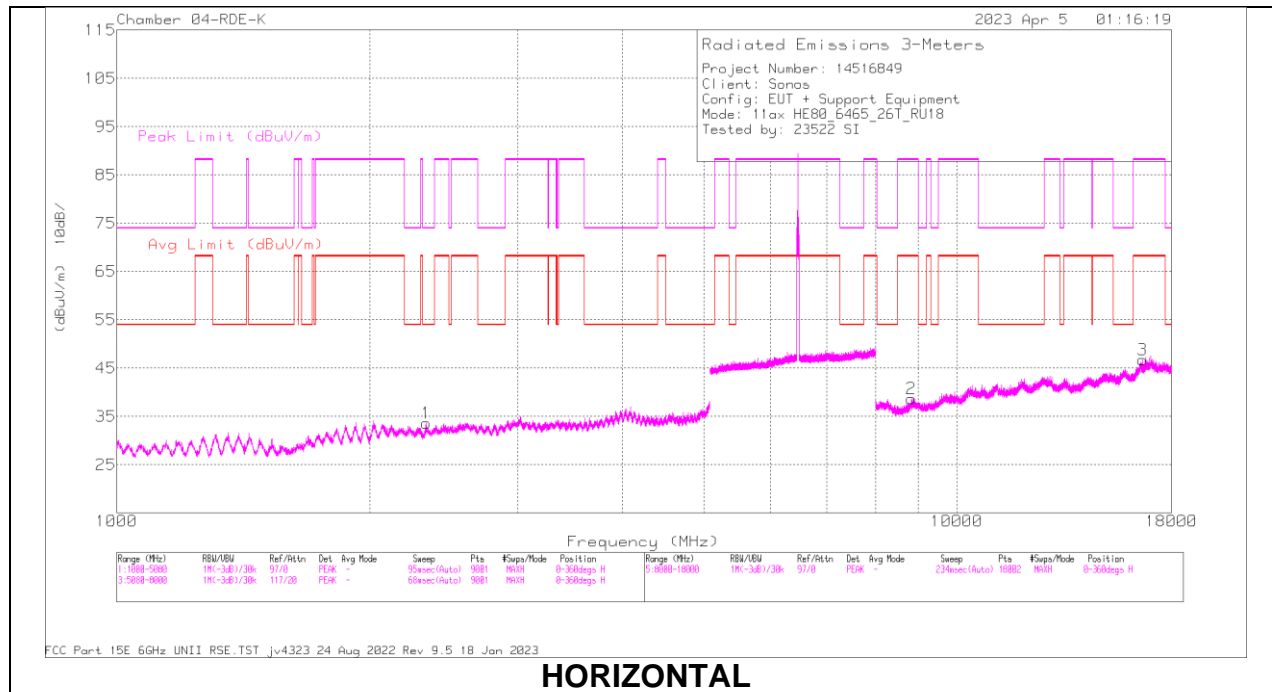

HORIZONTAL

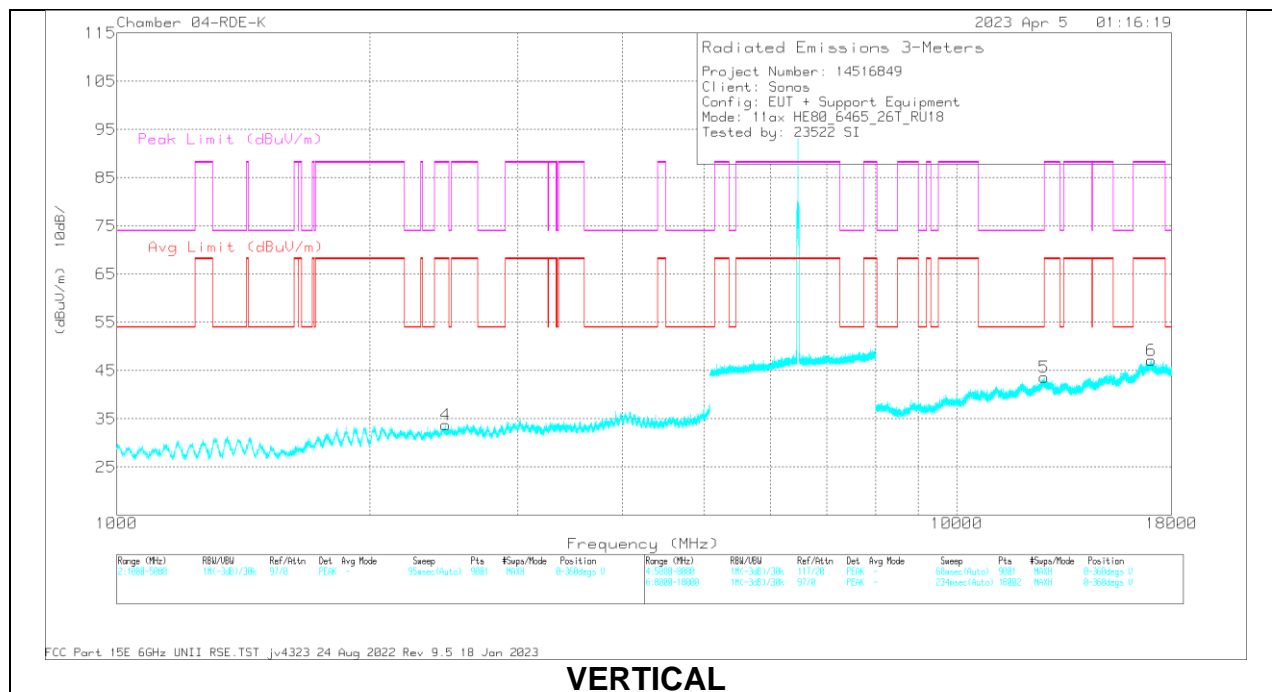

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cb/Fitr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2333.447	55.8	PK-U	31.5	-44.8	0	42.5	-	-	74	-31.5	114	107	H
	* 2334.705	43.85	ADR	31.5	-44.8	3.12	33.67	54	-20.33	-	-	114	107	H
4	2460.015	54.82	PK-U	32.1	-44.4	0	42.52	-	-	88.2	-45.68	224	265	V
	2460.527	43.2	ADR	32.1	-44.4	3.12	34.02	68.2	-34.18	-	-	224	265	V
2	8821.205	49.08	PK-U	35.9	-36.8	0	48.18	-	-	88.2	-40.02	106	349	H
	8821.074	36.83	ADR	35.9	-36.8	3.12	39.05	68.2	-29.15	-	-	106	349	H
3	16637.227	45.97	PK-U	41.4	-33	0	54.37	-	-	88.2	-33.83	282	107	H
	16636.461	34.01	ADR	41.4	-33	3.12	45.53	68.2	-22.67	-	-	282	107	H
5	12701.851	46.69	PK-U	39.4	-34.1	0	51.99	-	-	88.2	-36.21	36	144	V
	12700.727	34.99	ADR	39.4	-34.1	3.12	43.41	68.2	-24.79	-	-	36	144	V
6	17025.057	46.18	PK-U	41.6	-32.3	0	55.48	-	-	88.2	-32.72	274	231	V
	17027.57	34.24	ADR	41.6	-32.4	3.12	46.56	68.2	-21.64	-	-	274	231	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 3 + Antenna 4 OFDMA MODE: 26-Tones, RU Index 36

HARMONICS AND SPURIOUS EMISSIONS

STRADDLE CHANNEL

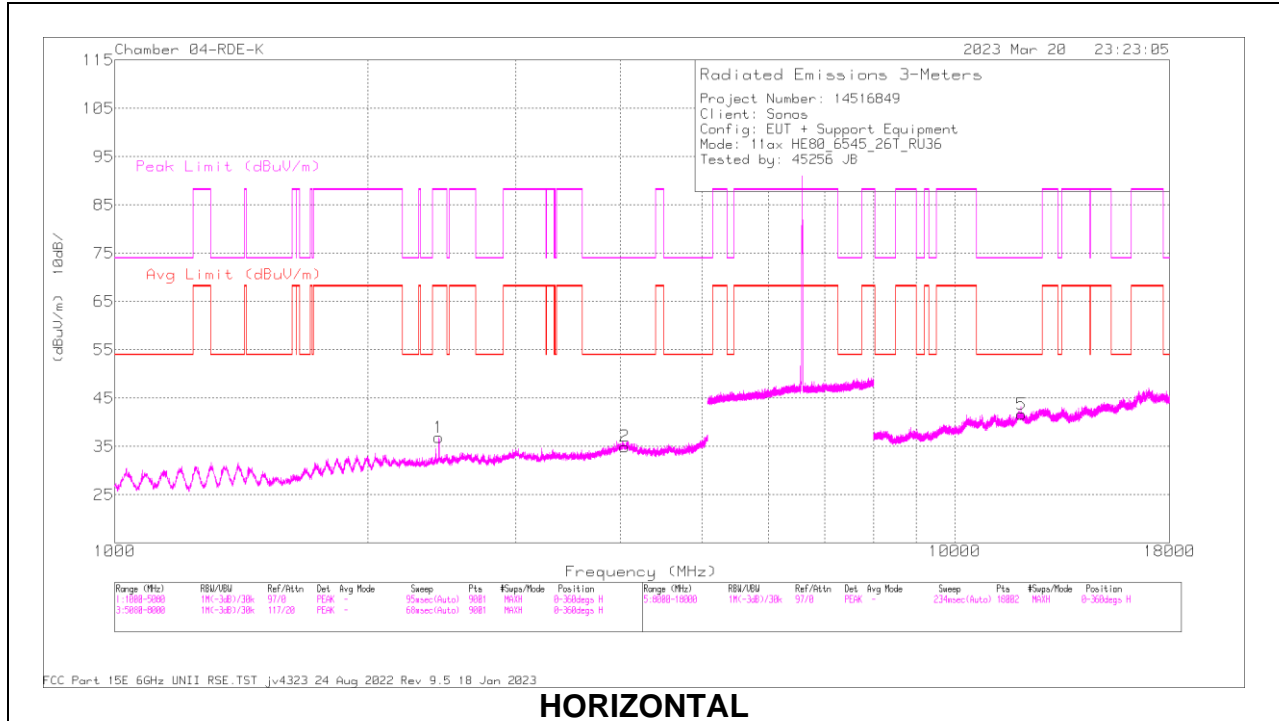

HORIZONTAL

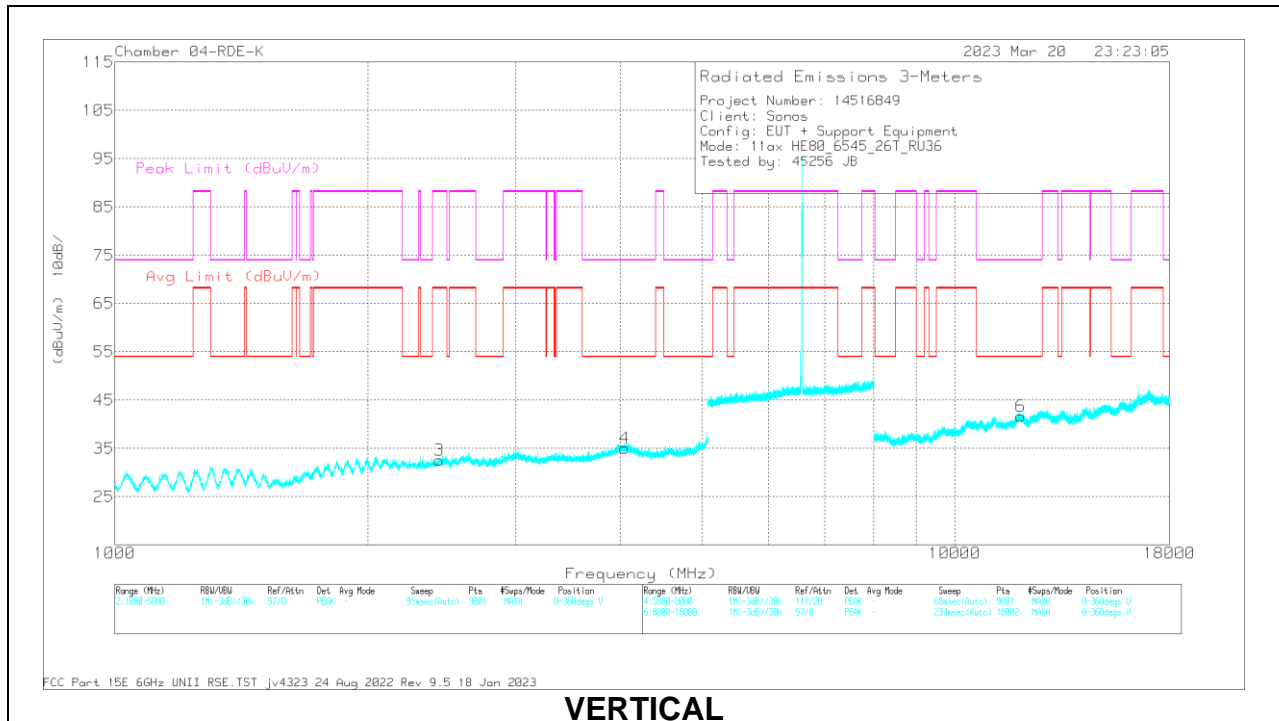

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cb/Fitr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2430.686	59.15	PK-U	32	-44.6	0	46.55	-	-	88.2	-41.65	240	166	H
	2429.706	43.6	ADR	32	-44.5	3.12	34.22	68.2	-33.98	-	-	240	166	H
2	* 4046.84	52.55	PK-U	35.2	-41.6	0	46.15	-	-	74	-27.85	108	233	H
	* 4050.273	39.99	ADR	35.2	-41.6	3.12	36.71	54	-17.29	-	-	108	233	H
3	2431.932	55.62	PK-U	32	-44.6	0	43.02	-	-	88.2	-45.18	60	195	V
	2431.423	43.59	ADR	32	-44.6	3.12	34.11	68.2	-34.09	-	-	60	195	V
4	* 4043.523	51.83	PK-U	35.2	-41.7	0	45.33	-	-	74	-28.67	138	136	V
	* 4043.417	40	ADR	35.2	-41.7	3.12	36.62	54	-17.38	-	-	138	136	V
5	* 12007.084	46.79	PK-U	38.7	-34.1	0	51.39	-	-	74	-22.61	189	274	H
	* 12004.966	34.98	ADR	38.6	-34	3.12	42.70	54	-11.30	-	-	189	274	H
6	* 11974.571	46.89	PK-U	38.6	-34.4	0	51.09	-	-	74	-22.91	159	106	V
	* 11976.933	35.34	ADR	38.6	-34.4	3.12	42.66	54	-11.34	-	-	159	106	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


2TX Antenna 3 + Antenna 4 OFDMA MODE: 996-Tones, RU Index 67

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL

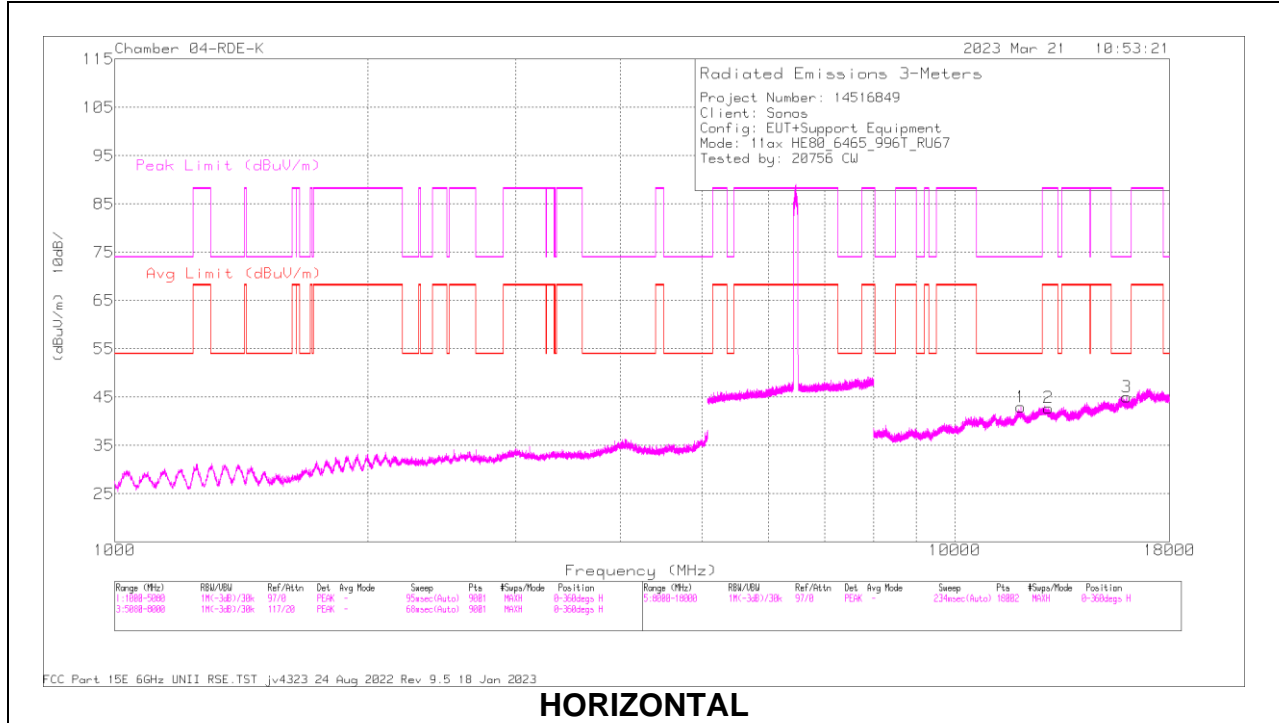

HORIZONTAL

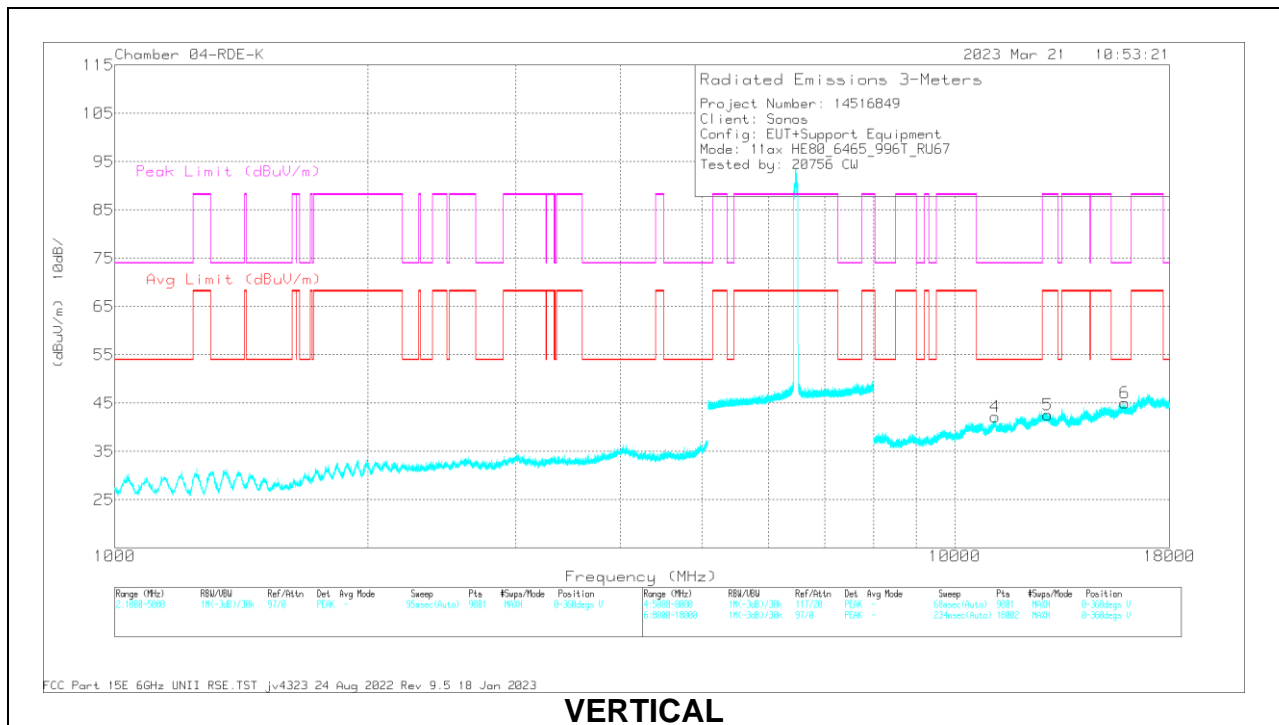

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cb/Filtr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 11975.378	47.47	PK-U	38.6	-34.4	0	51.67	-	-	74	-22.33	323	296	H
	* 11974.866	35.29	ADR	38.6	-34.4	4.53	44.02	54	-9.98	-	-	323	296	H
2	12912.828	46.72	PK-U	39.4	-34.1	0	52.02	-	-	88.2	-36.18	185	391	H
	12912.942	34.79	ADR	39.4	-34.1	4.53	44.62	68.2	-23.58	-	-	185	391	H
3	* 16025.783	46.91	PK-U	40.3	-33.4	0	53.81	-	-	74	-20.19	285	319	H
	* 16025.787	34.83	ADR	40.3	-33.4	4.53	46.26	54	-7.74	-	-	285	319	H
4	* 11159.199	48.37	PK-U	38	-35.3	0	51.07	-	-	74	-22.93	15	348	V
	* 11160.325	36.57	ADR	38	-35.3	4.53	43.8	54	-10.2	-	-	15	348	V
5	12901.821	46.86	PK-U	39.4	-34.1	0	52.16	-	-	88.2	-36.04	359	364	V
	12901.669	34.9	ADR	39.4	-34.1	4.53	44.73	68.2	-23.47	-	-	359	364	V
6	* 15928.446	47.52	PK-U	40.2	-33	0	54.72	-	-	74	-19.28	204	371	V
	* 15928.592	34.94	ADR	40.2	-33	4.53	46.67	54	-7.33	-	-	204	371	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STRADDLE CHANNEL

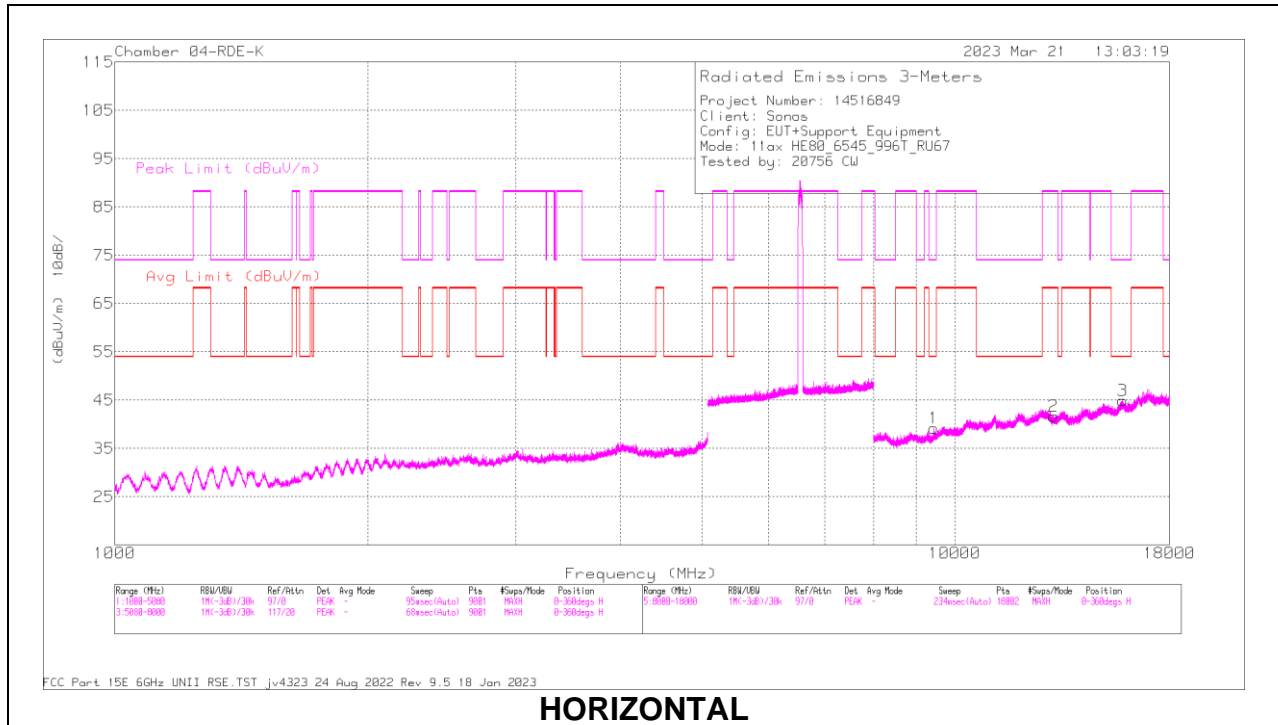

HORIZONTAL

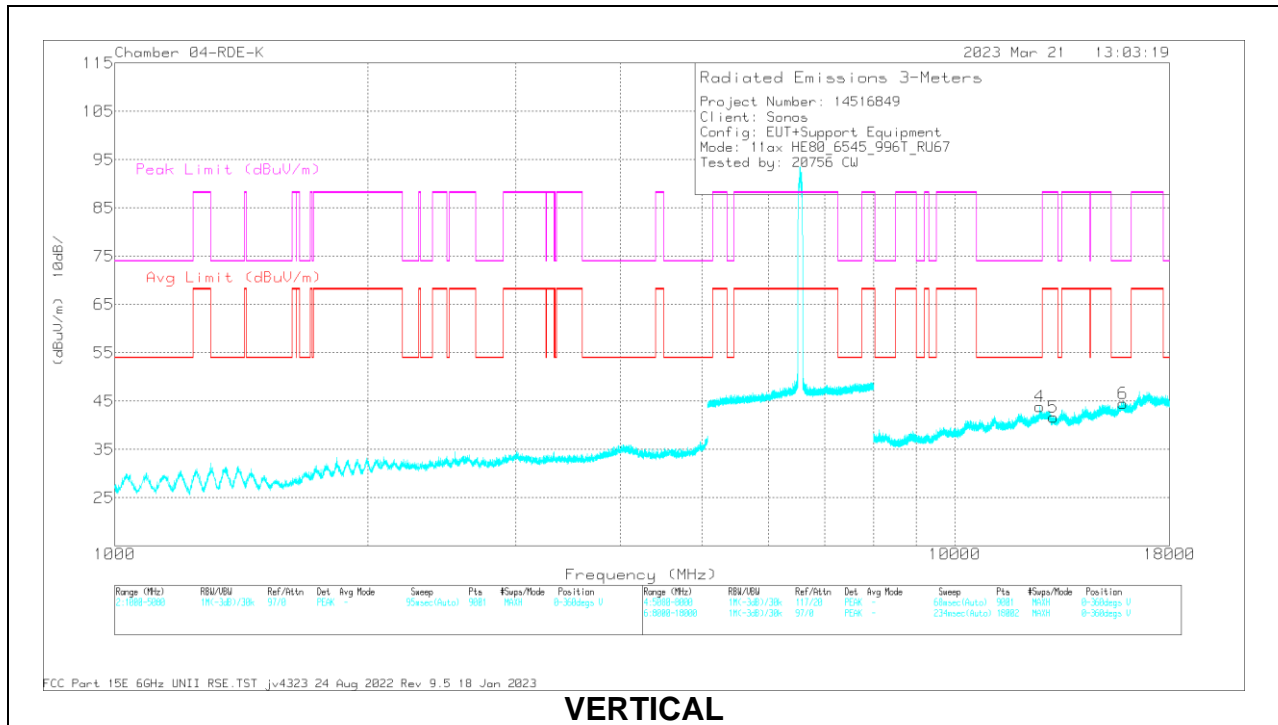

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cb/Filtr (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 9446.161	48.02	PK-U	36.5	-36.4	0	48.12	-	-	74	-25.88	332	133	H
	* 9444.832	35.9	ADR	36.5	-36.5	4.53	40.43	54	-13.57	-	-	332	133	H
2	13093.155	47.31	PK-U	39.2	-34.1	0	52.41	-	-	88.2	-35.79	341	157	H
	13093.245	34.65	ADR	39.2	-34.1	4.53	44.28	68.2	-23.92	-	-	341	157	H
3	* 15836.859	47.82	PK-U	40.2	-33.4	0	54.62	-	-	74	-19.38	19	161	H
	* 15836.544	35.41	ADR	40.2	-33.4	4.53	46.74	54	-7.26	-	-	19	161	H
4	* 12617.229	47.02	PK-U	39.4	-34	0	52.42	-	-	74	-21.58	296	126	V
	* 12616.262	34.67	ADR	39.4	-34.1	4.53	44.5	54	-9.5	-	-	296	126	V
5	13093.744	46.99	PK-U	39.2	-34.1	0	52.09	-	-	88.2	-36.11	341	168	V
	13093.56	34.68	ADR	39.2	-34.1	4.53	44.31	68.2	-23.89	-	-	341	168	V
6	* 15861.446	48.59	PK-U	40.2	-33.1	0	55.69	-	-	74	-18.31	182	371	V
	* 15861.664	35.25	ADR	40.2	-33.1	4.53	46.88	54	-7.12	-	-	182	371	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average