


VERTICAL RESULT


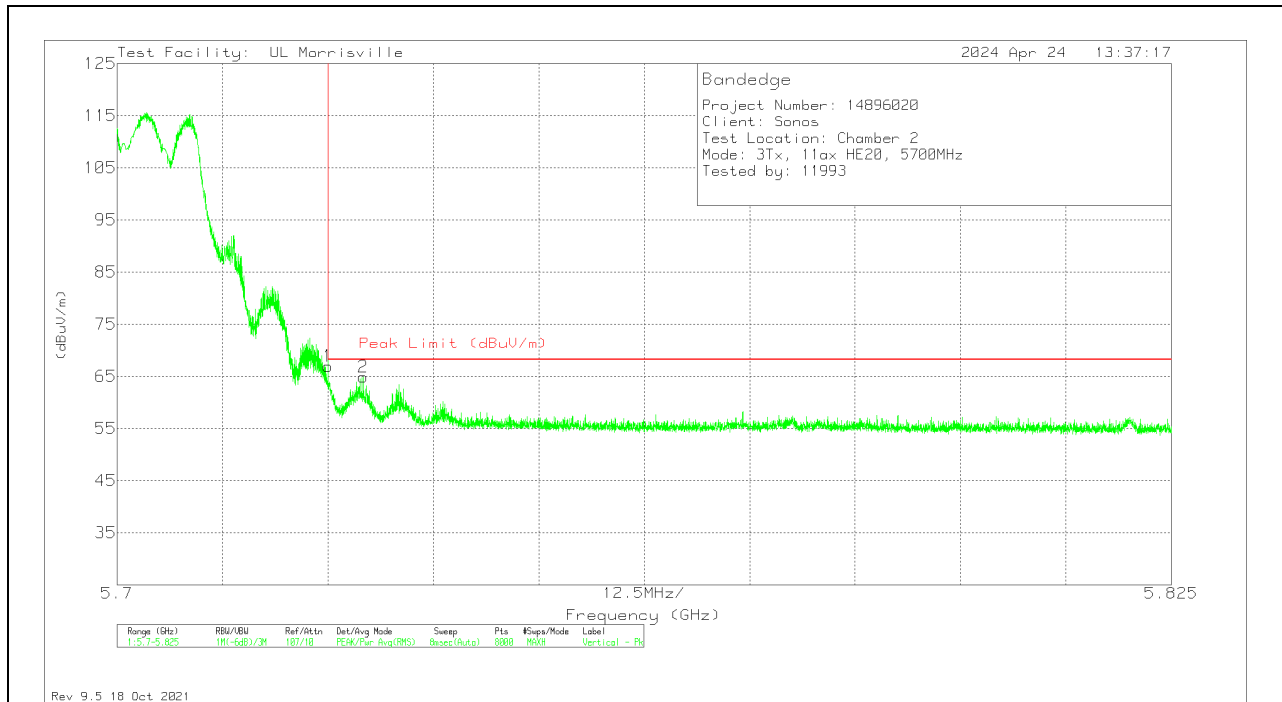


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	86408 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	45.24	Pk	34.7	-23	10	66.94	68.2	-1.26	135	240	V
2	5.72919	43.07	Pk	34.7	-22.9	10	64.87	68.2	-3.33	135	240	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

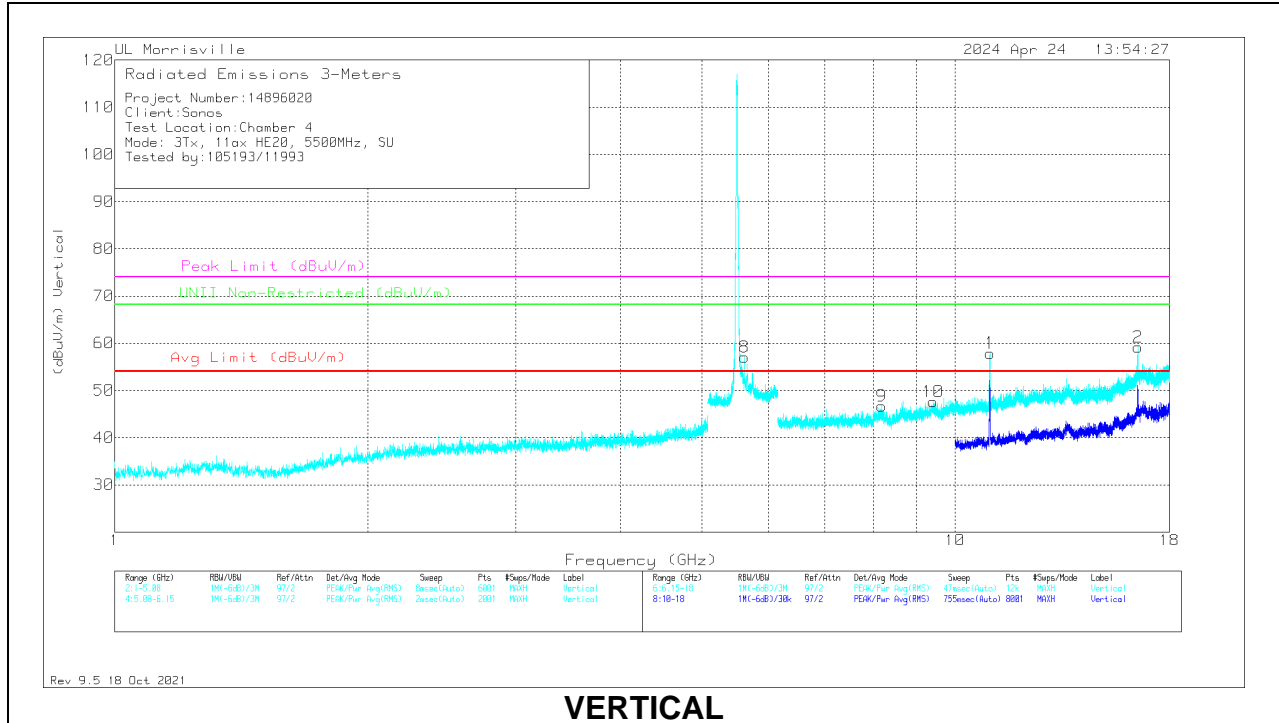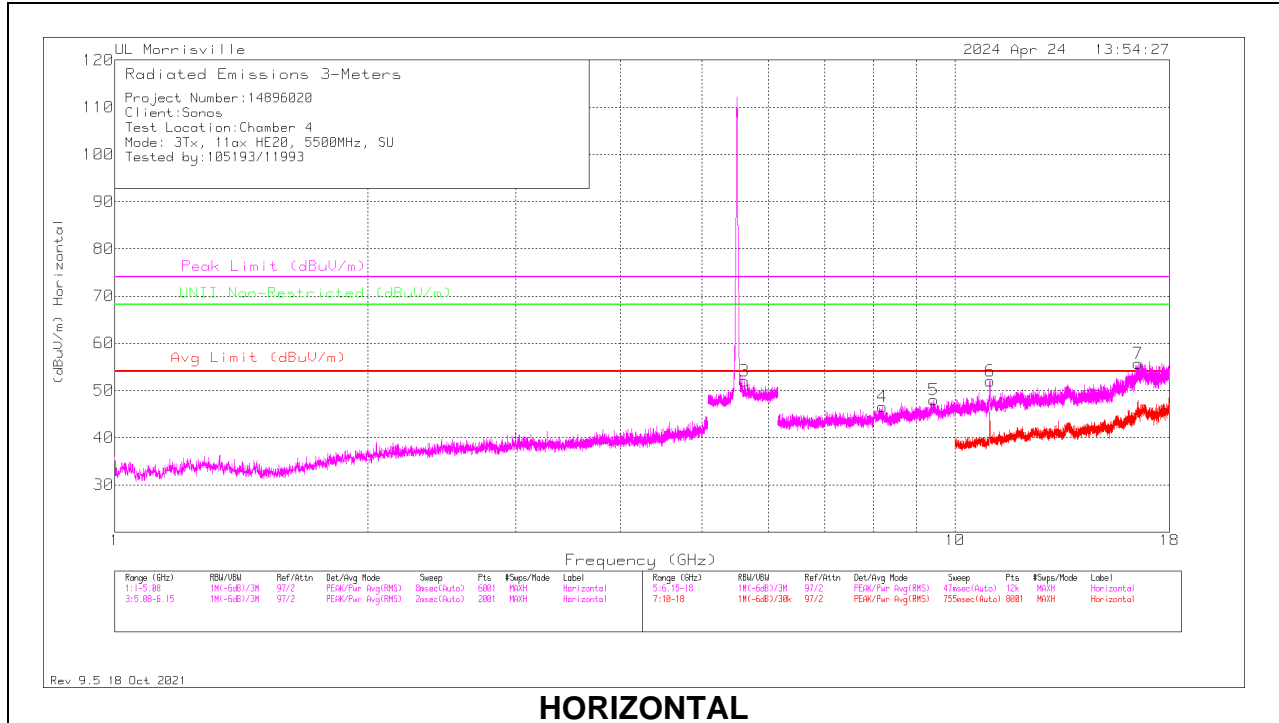


RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	*** 8.1961	37.65	Pk	35.8	-26.9	46.55	54	-7.45	74	-27.45	-	-	0-360	200	H
5	*** 9.43764	36.68	PK-U	36.7	-25.5	47.88	-	-	74	-26.12	-	-	308	294	H
	*** 9.43846	25.64	ADR	36.7	-25.4	36.94	54	-17.06	-	-	-	-	308	294	H
6	*** 11.00735	43.64	PK-U	37.9	-24.9	56.64	-	-	74	-17.36	-	-	74	206	H
	*** 11.0074	31.82	ADR	37.9	-24.9	44.82	54	-9.18	-	-	-	-	74	206	H
1	*** 11.00587	49.2	PK-U	37.9	-25.2	61.9	-	-	74	-12.1	-	-	356	237	V
	*** 11.00539	36.9	ADR	37.9	-25.3	49.5	54	-4.5	-	-	-	-	356	237	V
9	*** 8.17635	37.72	Pk	35.8	-26.8	46.72	54	-7.28	74	-27.28	-	-	0-360	100	V
10	*** 9.42356	36.31	Pk	36.6	-25.3	47.61	54	-6.39	74	-26.39	-	-	0-360	100	V
8	5.61982	30.96	Pk	34.6	-8.5	57.06	-	-	-	-	68.2	-11.14	0-360	200	V
3	5.62035	25.9	Pk	34.6	-8.5	52	-	-	-	-	68.2	-16.2	0-360	100	H
7	16.50591	34.48	Pk	41.4	-20.1	55.78	-	-	-	-	68.2	-12.42	0-360	200	H
2	16.50591	37.83	Pk	41.4	-20.1	59.13	-	-	-	-	68.2	-9.07	0-360	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 PK-U - Maximum Peak
 ADR - RMS average

MID CHANNEL RESULTS

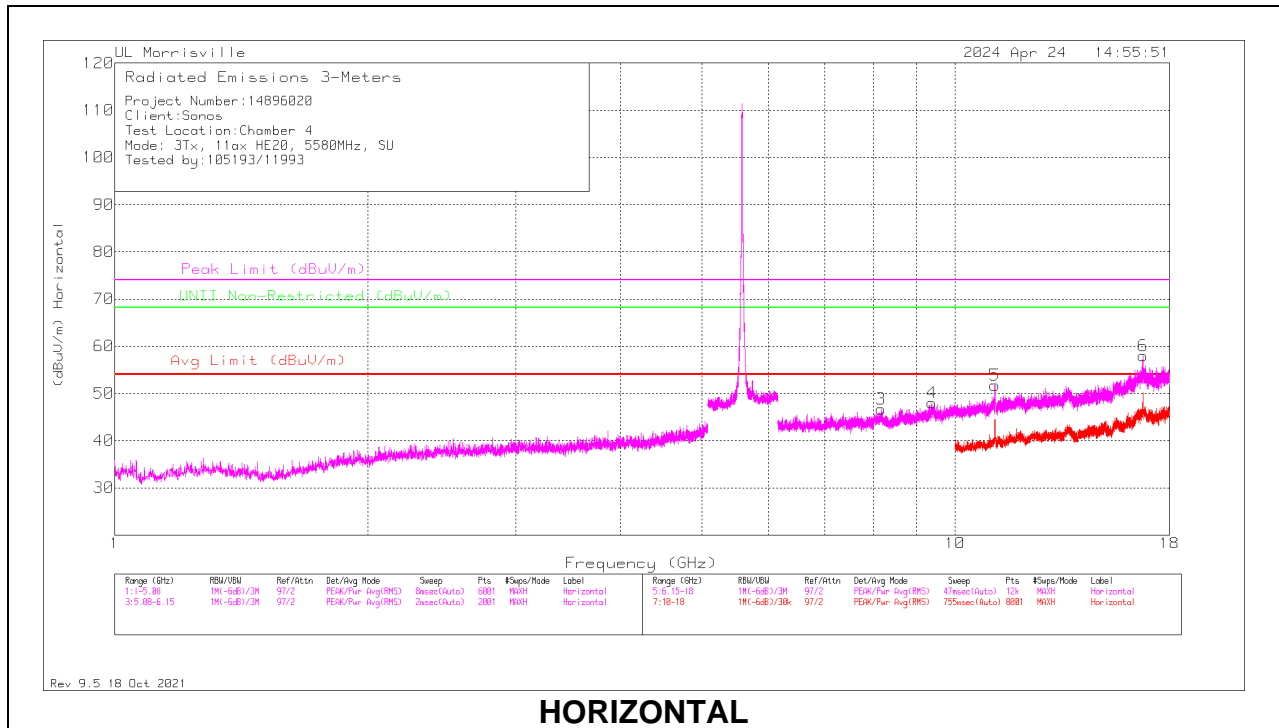

HORIZONTAL

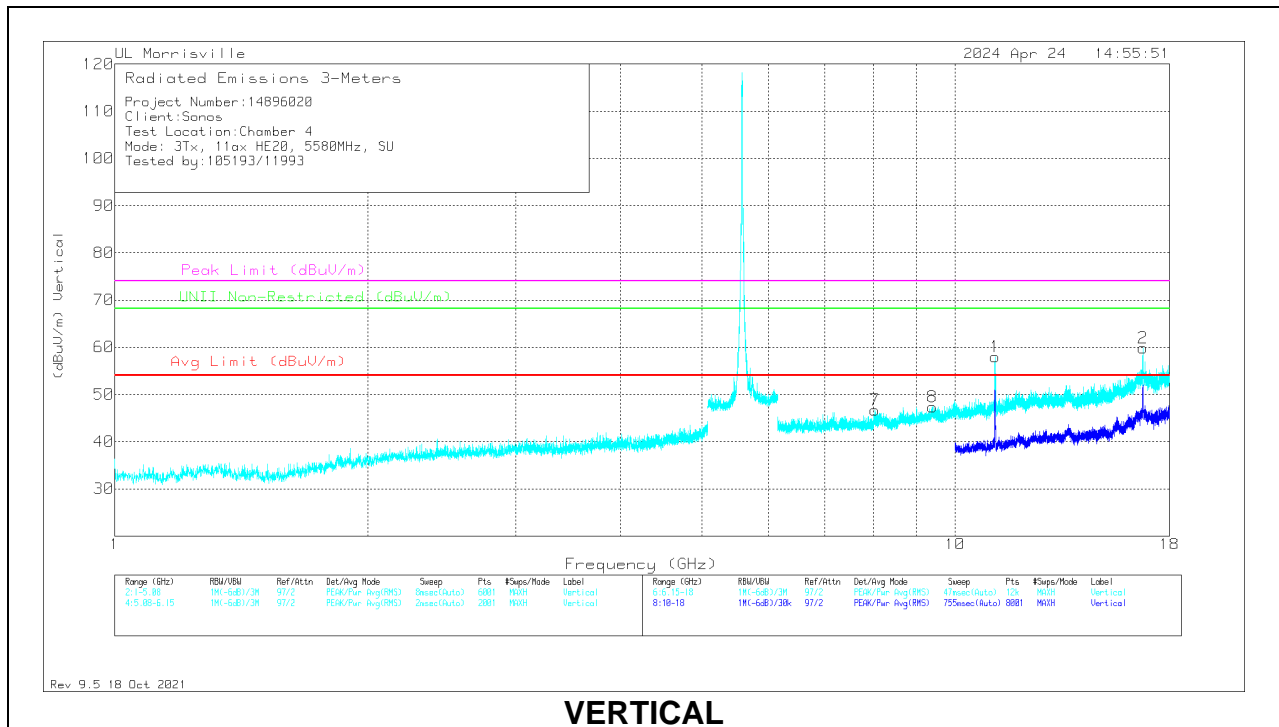

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	*** 8.16351	37.73	Pk	35.8	-26.9	46.63	54	-7.37	74	-27.37	-	-	0-360	200	H
4	*** 9.38576	36.85	PK-U	36.6	-25.2	48.25	-	-	74	-25.75	-	-	41	180	H
	*** 9.38721	25.72	ADR	36.6	-25.3	37.02	54	-16.98	-	-	-	-	41	180	H
5	*** 11.15724	42.52	PK-U	37.9	-24.6	55.82	-	-	74	-18.18	-	-	77	195	H
	*** 11.15702	30.02	ADR	37.9	-24.5	43.42	54	-10.58	-	-	-	-	77	195	H
1	*** 11.16001	49.41	PK-U	37.9	-24.6	62.71	-	-	74	-11.29	-	-	355	219	V
	*** 11.16073	38.26	ADR	37.9	-24.5	51.66	54	-2.34	-	-	-	-	355	219	V
7	*** 8.03218	38.5	Pk	35.8	-27.6	46.7	54	-7.3	74	-27.3	-	-	0-360	100	V
8	*** 9.41073	36.3	Pk	36.6	-25.5	47.4	54	-6.6	74	-26.6	-	-	0-360	100	V
6	16.73896	35.12	Pk	41.9	-19.1	57.92	-	-	-	-	68.2	-10.28	0-360	200	H
2	16.74884	37.39	Pk	41.9	-19.5	59.79	-	-	-	-	68.2	-8.41	0-360	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - Maximum Peak

ADR - RMS average

HIGH CHANNEL RESULTS

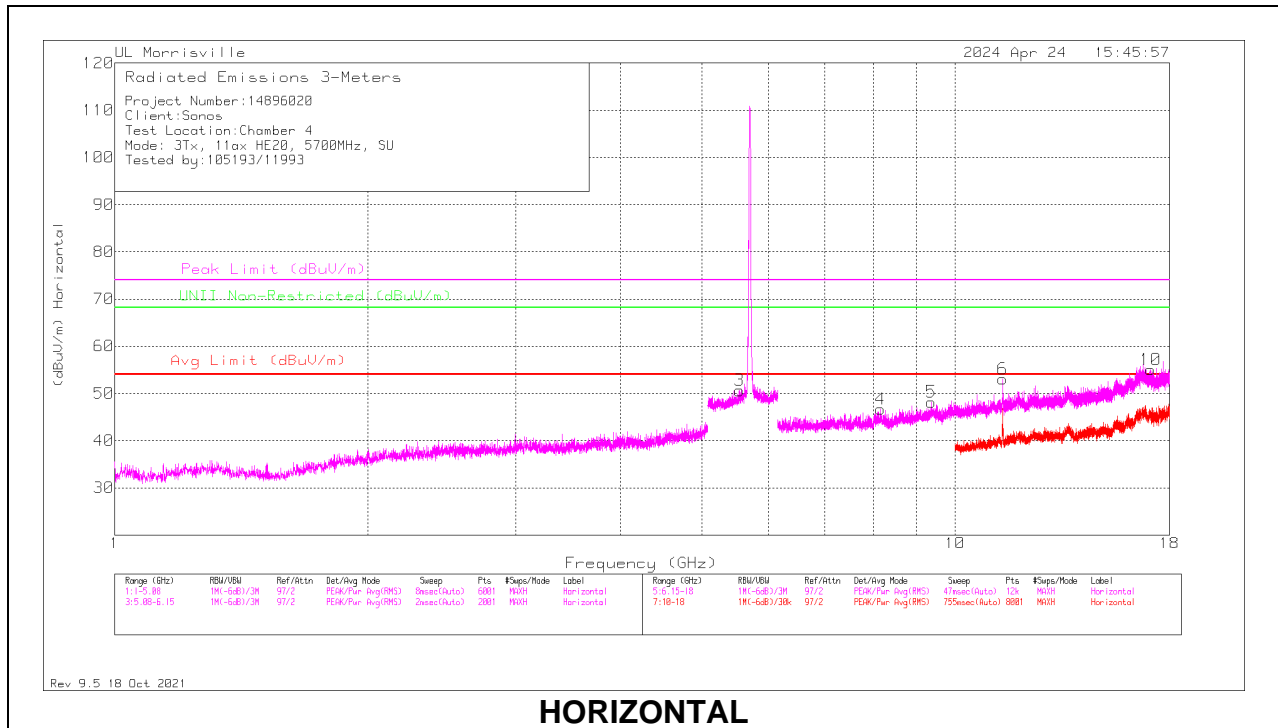

HORIZONTAL

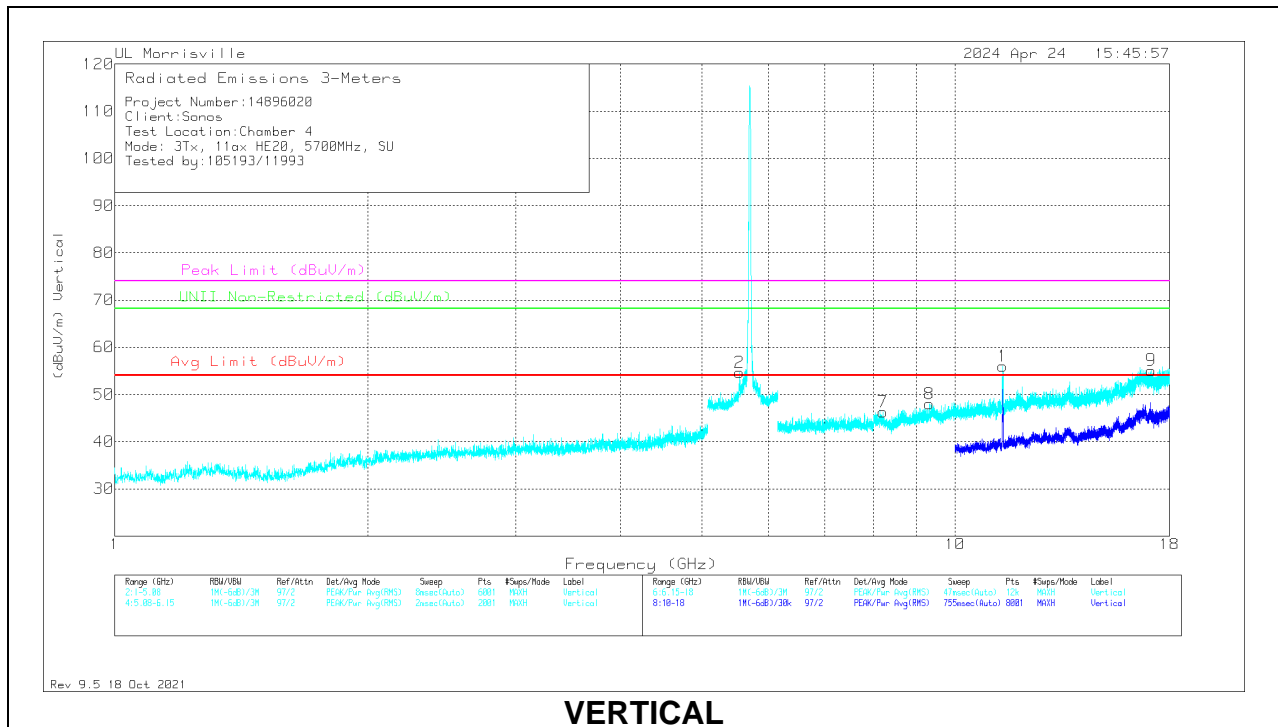

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	*** 8.15463	37.55	Pk	35.8	-26.7	46.65	54	-7.35	74	-27.35	-	-	0-360	200	H
5	*** 9.36526	37.5	PK-U	36.5	-25.3	48.7	-	-	74	-25.3	-	-	298	126	H
	*** 9.36546	25.79	ADR	36.5	-25.3	36.99	54	-17.01	-	-	-	-	298	126	H
6	*** 11.39195	40.6	PK-U	38.1	-24.2	54.5	-	-	74	-19.5	-	-	49	213	H
	*** 11.39247	28.63	ADR	38.1	-24.2	42.53	54	-11.47	-	-	-	-	49	213	H
1	*** 11.39784	49.42	PK-U	38.1	-24.1	63.42	-	-	74	-10.58	-	-	12	222	V
	*** 11.39813	37.43	ADR	38.1	-24	51.53	54	-2.47	-	-	-	-	12	222	V
7	*** 8.20499	37.42	Pk	35.8	-26.9	46.32	54	-7.68	74	-27.68	-	-	0-360	100	V
8	*** 9.32127	36.8	PK-U	36.4	-25.6	47.6	-	-	74	-26.4	-	-	269	213	V
	*** 9.32129	25.43	ADR	36.4	-25.6	36.23	54	-17.77	-	-	-	-	269	213	V
2	5.54117	28.94	Pk	34.6	-8.9	54.64	-	-	-	-	68.2	-13.56	0-360	200	V
3	5.54438	24.91	Pk	34.6	-8.9	50.61	-	-	-	-	68.2	-17.59	0-360	100	H
10	17.10236	33.51	Pk	41.5	-19.9	55.11	-	-	-	-	68.2	-13.09	0-360	200	H
9	17.11323	33.22	Pk	41.5	-19.6	55.12	-	-	-	-	68.2	-13.08	0-360	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

PK-U - Maximum Peak


ADR - RMS average

10.1.20. TX ABOVE 1 GHz 802.11ax HE40 MODE IN THE 5.6 GHz BAND

3TX CDD MODE – SU

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

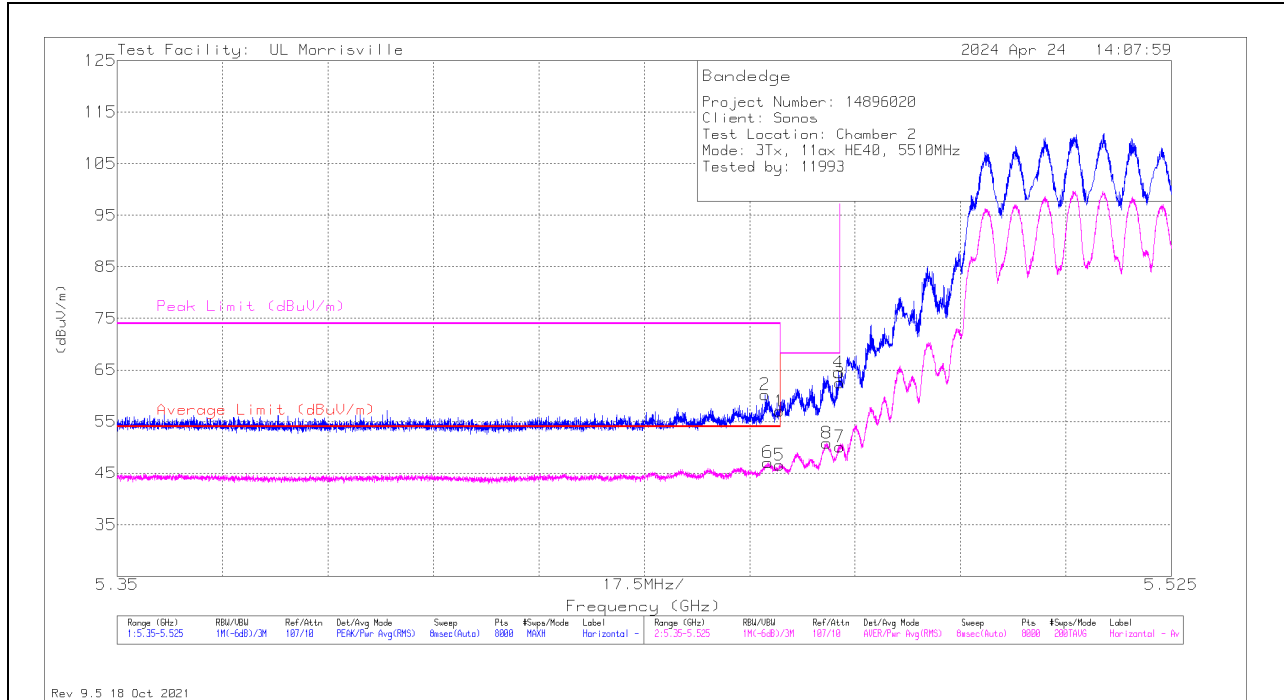

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	86408 (dB/m)	Gain/Loss (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45998	35.81	Pk	34.5	-23.3	10	0	57.01	-	-	74	-16.99	149	307	H
2	*** 5.45755	39.01	Pk	34.5	-23.3	10	0	60.21	-	-	74	-13.79	149	307	H
5	*** 5.45998	25.24	RMS	34.5	-23.3	10	.12	46.56	54	-7.44	-	-	149	307	H
6	*** 5.45803	25.75	RMS	34.5	-23.3	10	.12	47.07	54	-6.93	-	-	149	307	H
8	5.46781	29.5	RMS	34.5	-23.3	10	.12	50.82	-	-	-	-	149	307	H
4	5.46976	43.22	Pk	34.5	-23.2	10	0	64.52	-	-	68.2	-3.68	149	307	H
3	5.46998	41.19	Pk	34.5	-23.2	10	0	62.49	-	-	68.2	-5.71	149	307	H
7	5.46998	28.66	RMS	34.5	-23.2	10	.12	50.08	-	-	-	-	149	307	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

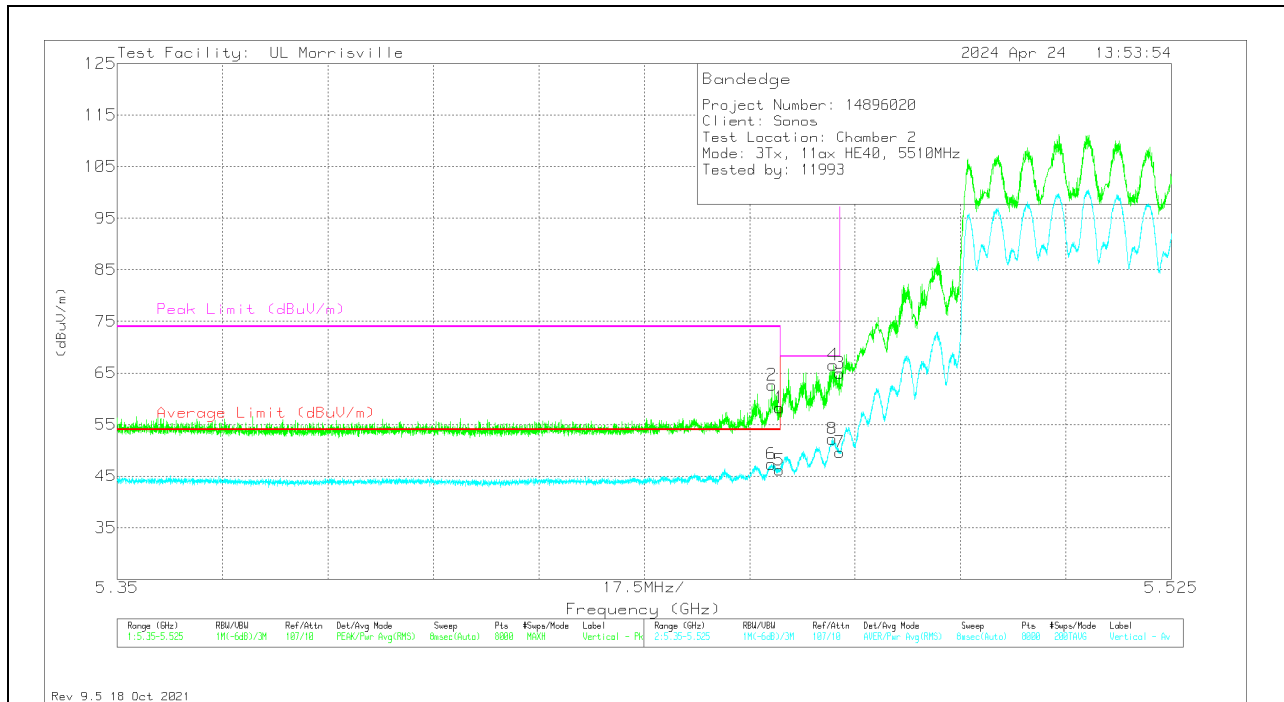


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	86408 (dB/m)	Gain/Loss (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	37.05	Pk	34.5	-23.3	10	0	58.25	-	-	74	-15.75	334	309	V
2	* ** 5.45869	41.45	Pk	34.5	-23.3	10	0	62.65	-	-	74	-11.35	334	309	V
5	* ** 5.45998	24.83	RMS	34.5	-23.3	10	.12	46.15	54	-7.85	-	-	334	309	V
6	* ** 5.45858	26.02	RMS	34.5	-23.3	10	.12	47.34	54	-6.66	-	-	334	309	V
8	5.46873	30.91	RMS	34.5	-23.3	10	.12	52.23	-	-	-	-	334	309	V
4	5.46886	45.33	Pk	34.5	-23.3	10	0	66.53	-	-	68.2	-1.67	334	309	V
3	5.46998	43.68	Pk	34.5	-23.2	10	0	64.98	-	-	68.2	-3.22	334	309	V
7	5.46998	28.23	RMS	34.5	-23.2	10	.12	49.65	-	-	-	-	334	309	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

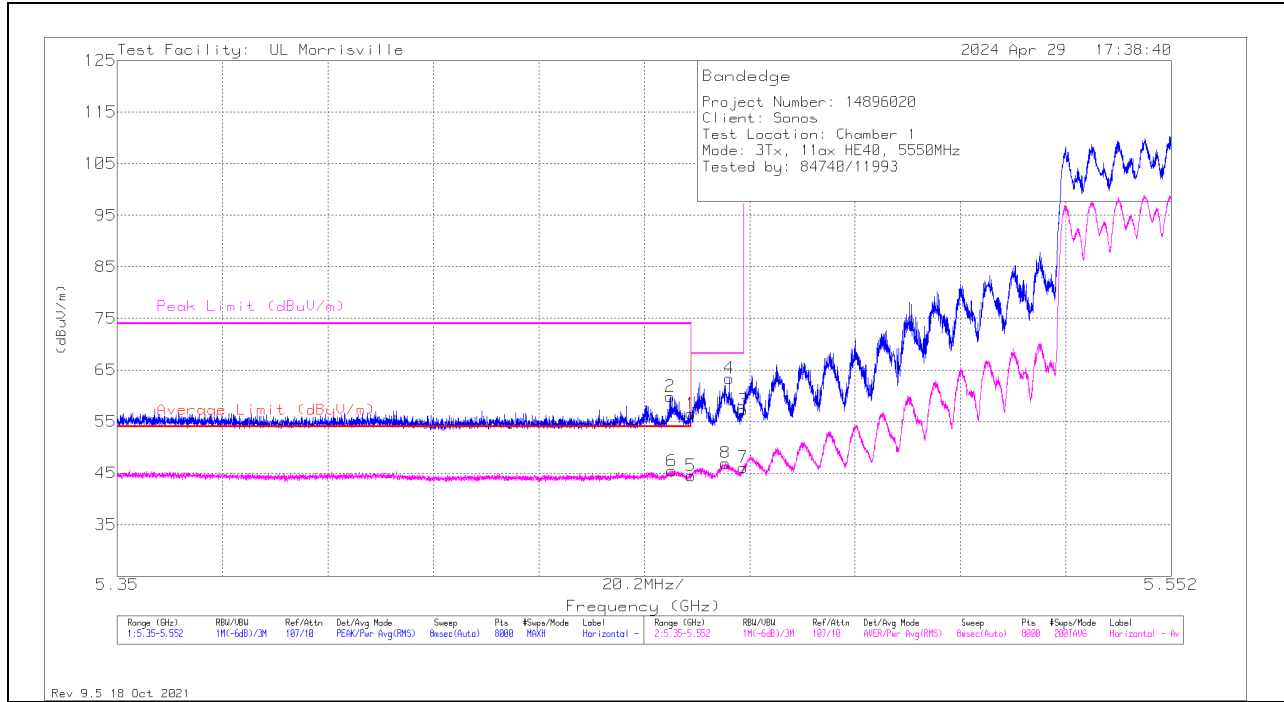

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	135143 (dB/m)	Gain/Loss (dB)	10dB Pad	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45998	35.42	Pk	34.4	-23.3	10	0	56.52	-	-	74	-17.48	241	374	H
2	*** 5.45594	38.66	Pk	34.4	-23.2	10	0	59.86	-	-	74	-14.14	241	374	H
5	*** 5.45998	23.26	RMS	34.4	-23.3	10	.12	44.48	54	-9.52	-	-	241	374	H
6	*** 5.45629	24.1	RMS	34.4	-23.2	10	.12	45.42	54	-8.58	-	-	241	374	H
8	5.46657	25.75	RMS	34.4	-23.3	10	.12	46.97	-	-	-	-	241	374	H
4	5.46727	42.3	Pk	34.4	-23.3	10	0	63.4	-	-	68.2	-4.8	241	374	H
3	5.46998	36.06	Pk	34.4	-23.2	10	0	57.26	-	-	68.2	-10.94	241	374	H
7	5.46998	24.78	RMS	34.4	-23.2	10	.12	46.1	-	-	-	-	241	374	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

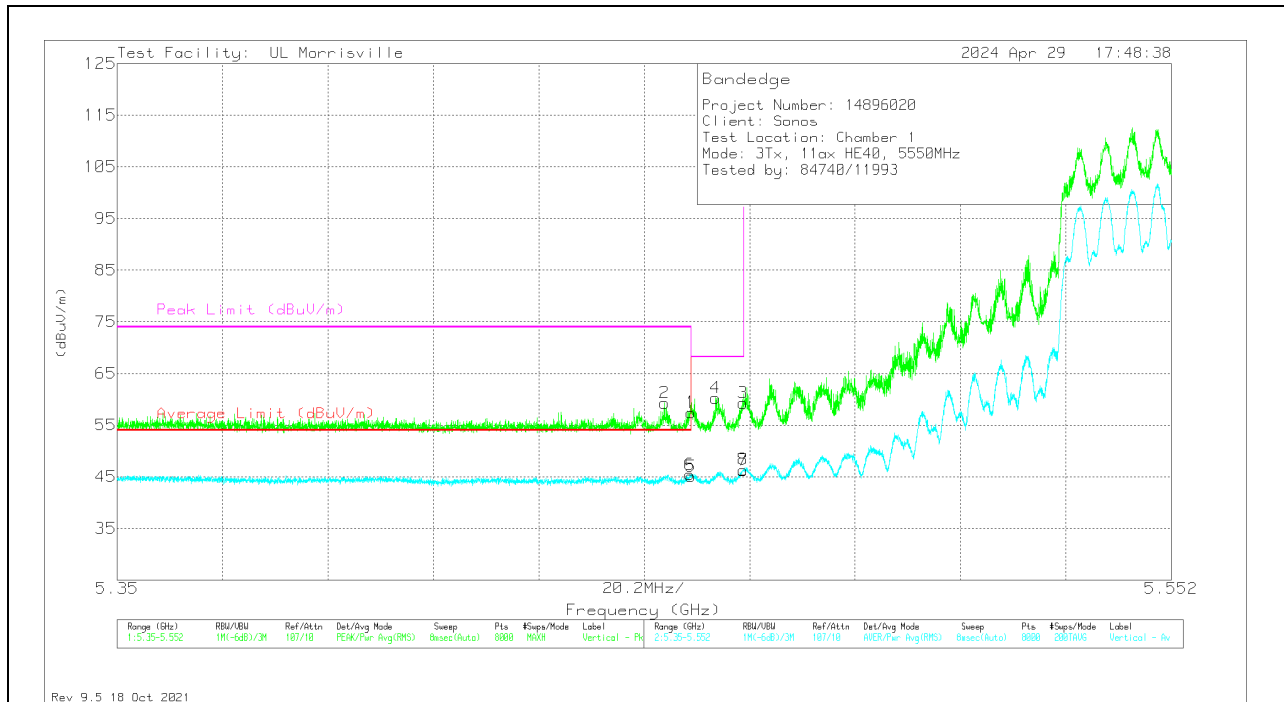


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	135143 (dB/m)	Gain/Loss (dB)	10dB Pad	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	36.32	Pk	34.4	-23.3	10	0	57.42	-	-	74	-16.58	239	368	V
2	* ** 5.4549	38.09	Pk	34.4	-23.2	10	0	59.29	-	-	74	-14.71	239	368	V
5	* ** 5.45998	23.83	RMS	34.4	-23.3	10	.12	45.05	54	-8.95	-	-	239	368	V
6	* ** 5.45975	24.22	RMS	34.4	-23.3	10	.12	45.44	54	-8.56	-	-	239	368	V
4	5.46465	39.27	Pk	34.4	-23.4	10	0	60.27	-	-	68.2	-7.93	239	368	V
8	5.4699	25.03	RMS	34.4	-23.2	10	.12	46.35	-	-	-	-	239	368	V
3	5.46998	38.09	Pk	34.4	-23.2	10	0	59.29	-	-	68.2	-8.91	239	368	V
7	5.46998	24.93	RMS	34.4	-23.2	10	.12	46.25	-	-	-	-	239	368	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

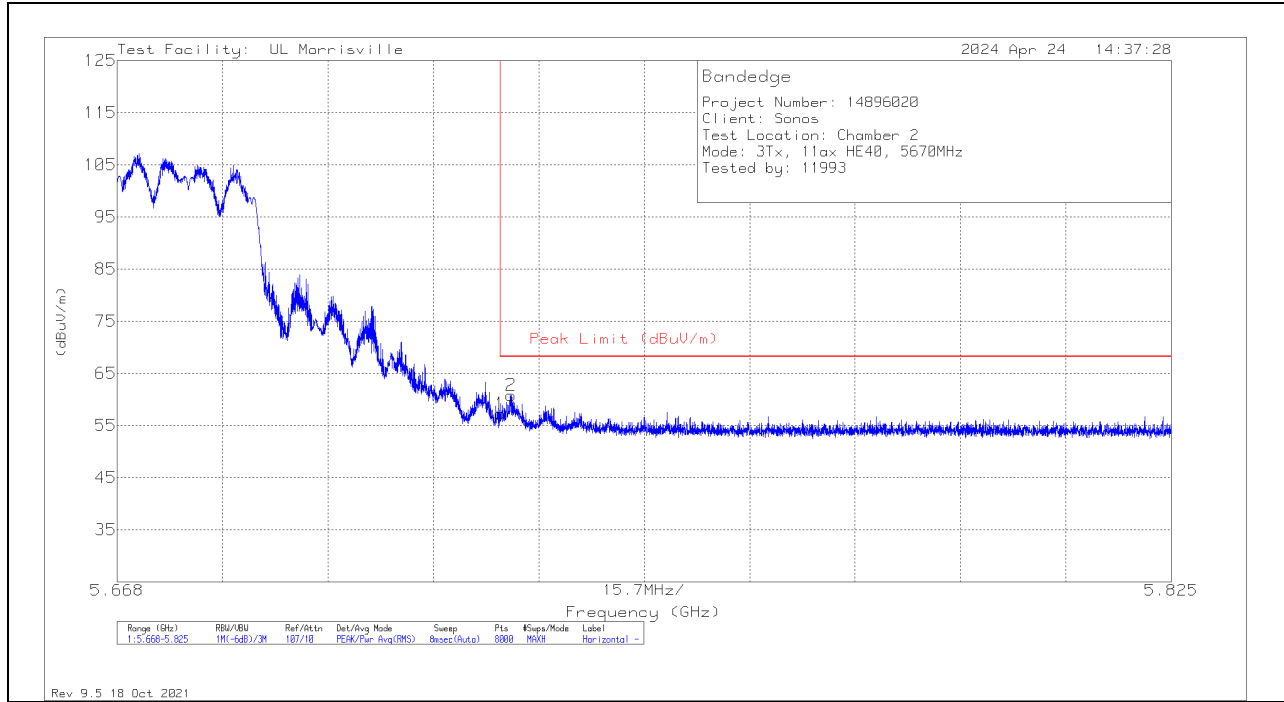

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	86408 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	35.58	Pk	34.7	-23	10	57.28	68.2	-10.92	176	352	H
2	5.72667	38.99	Pk	34.7	-22.9	10	60.79	68.2	-7.41	176	352	H

Pk - Peak detector

VERTICAL RESULT

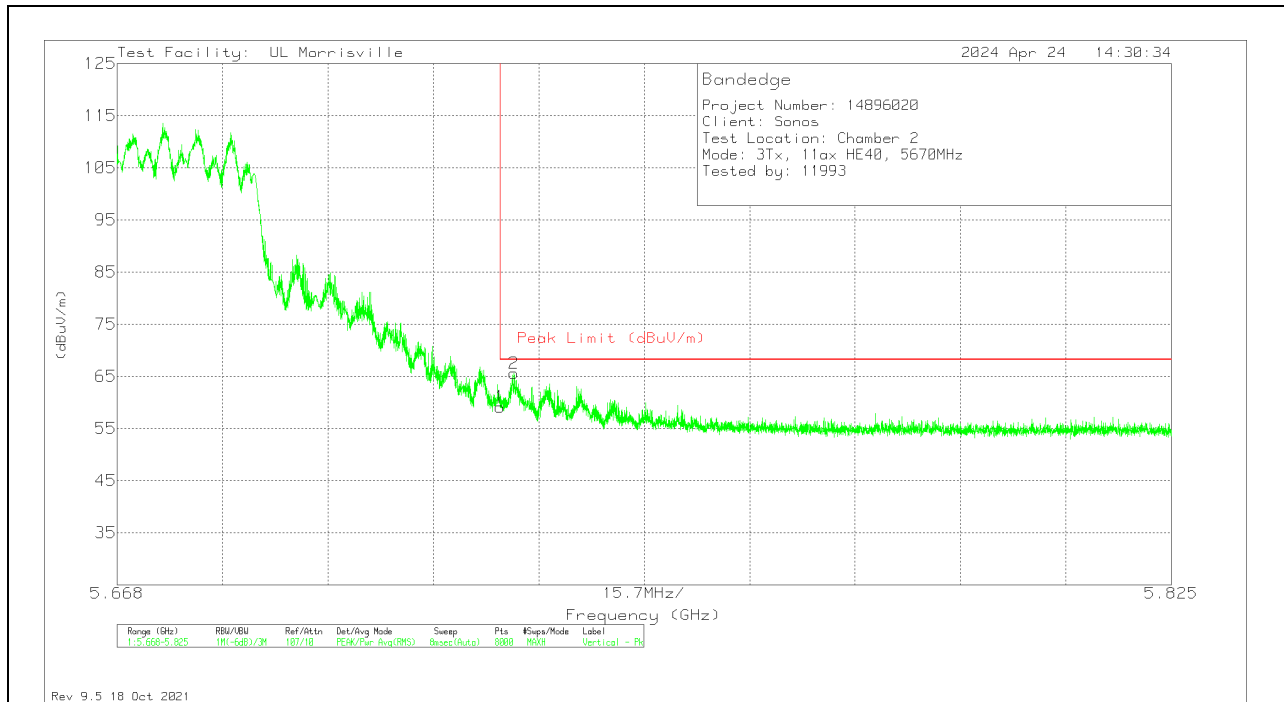

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	86408 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	37.42	Pk	34.7	-23	10	59.12	68.2	-9.08	56	243	V
2	5.72712	43.77	Pk	34.7	-22.9	10	65.57	68.2	-2.63	56	243	V


Pk - Peak detector

10.1.21. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE 5.6 GHz BAND

3TX CDD MODE – SU

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

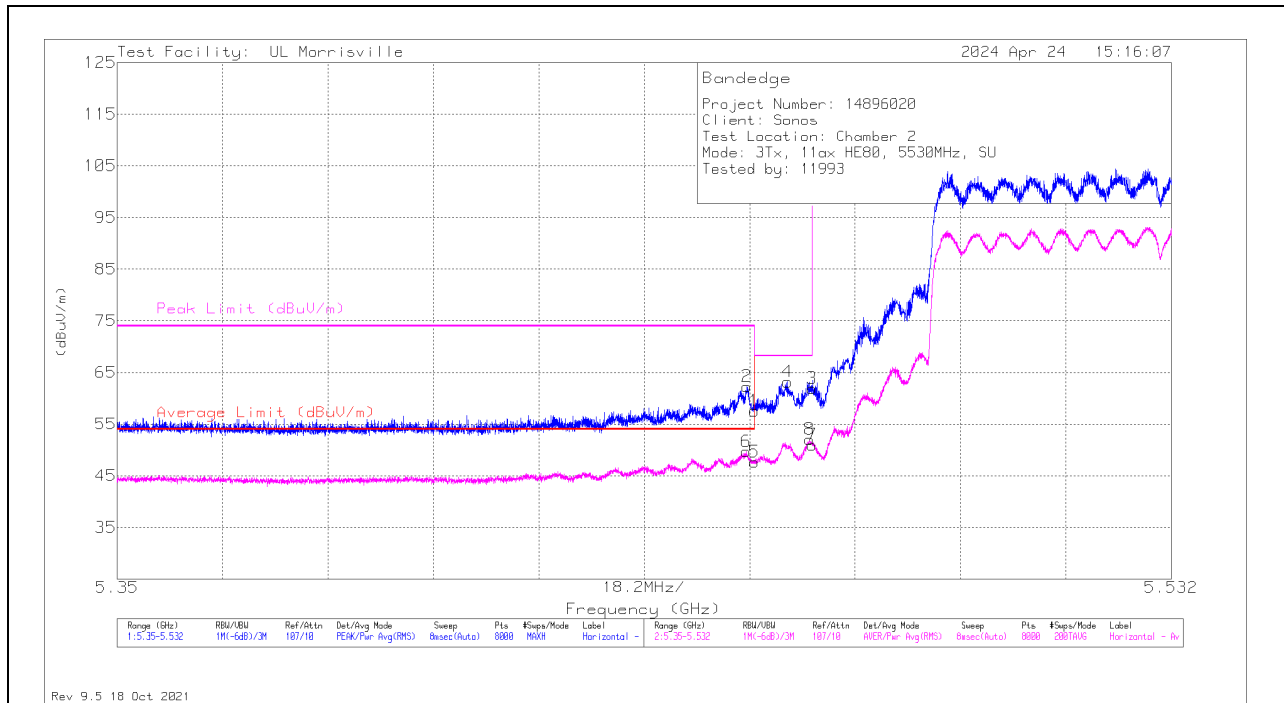

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	86408 (dB/m)	Gain/Loss (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45999	36.39	Pk	34.5	-23.3	10	0	57.59	-	-	74	-16.41	35	125	H
2	*** 5.45871	41.1	Pk	34.5	-23.3	10	0	62.3	-	-	74	-11.7	35	125	H
5	*** 5.45999	26.22	RMS	34.5	-23.3	10	.25	47.67	54	-6.33	-	-	35	125	H
6	*** 5.45862	28.25	RMS	34.5	-23.3	10	.25	49.7	54	-4.3	-	-	35	125	H
4	5.46574	42.08	Pk	34.5	-23.4	10	0	63.18	-	-	68.2	-5.02	35	125	H
8	5.46952	30.5	RMS	34.5	-23.2	10	.25	52.05	-	-	-	-	35	125	H
3	5.47	40.61	Pk	34.5	-23.2	10	0	61.91	-	-	68.2	-6.29	35	125	H
7	5.47	29.39	RMS	34.5	-23.2	10	.25	50.94	-	-	-	-	35	125	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

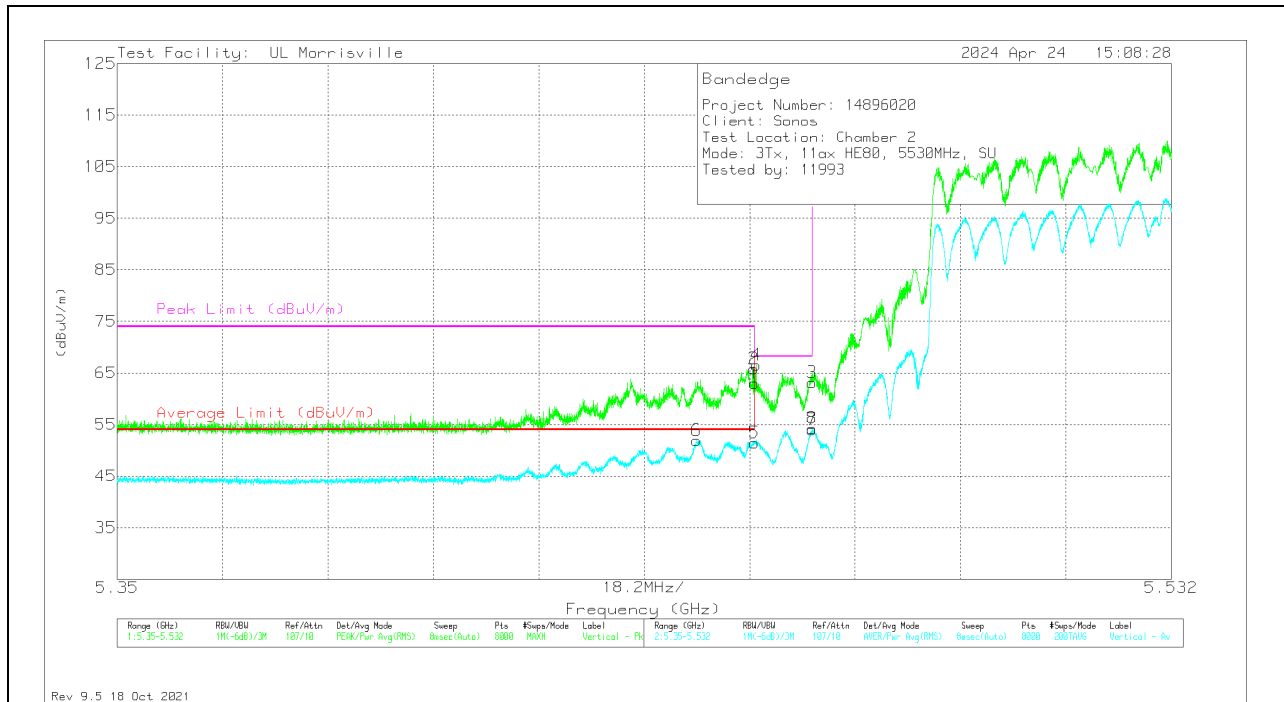

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	86408 (dB/m)	Gain/Loss (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45999	41.79	Pk	34.5	-23.3	10	0	62.99	-	-	74	-11.01	120	121	V
2	*** 5.4599	44.63	Pk	34.5	-23.3	10	0	65.83	-	-	74	-8.17	120	121	V
5	*** 5.45999	30.01	RMS	34.5	-23.3	10	.25	51.46	54	-2.54	-	-	120	121	V
6	*** 5.45004	30.36	RMS	34.5	-23.2	10	.25	51.91	54	-2.09	-	-	120	121	V
4	5.46031	45.35	Pk	34.5	-23.3	10	0	66.55	-	-	68.2	-1.65	120	121	V
8	5.46995	32.73	RMS	34.5	-23.2	10	.25	54.28	-	-	-	-	120	121	V
3	5.47	41.83	Pk	34.5	-23.2	10	0	63.13	-	-	68.2	-5.07	120	121	V
7	5.47	32.45	RMS	34.5	-23.2	10	.25	54	-	-	-	-	120	121	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

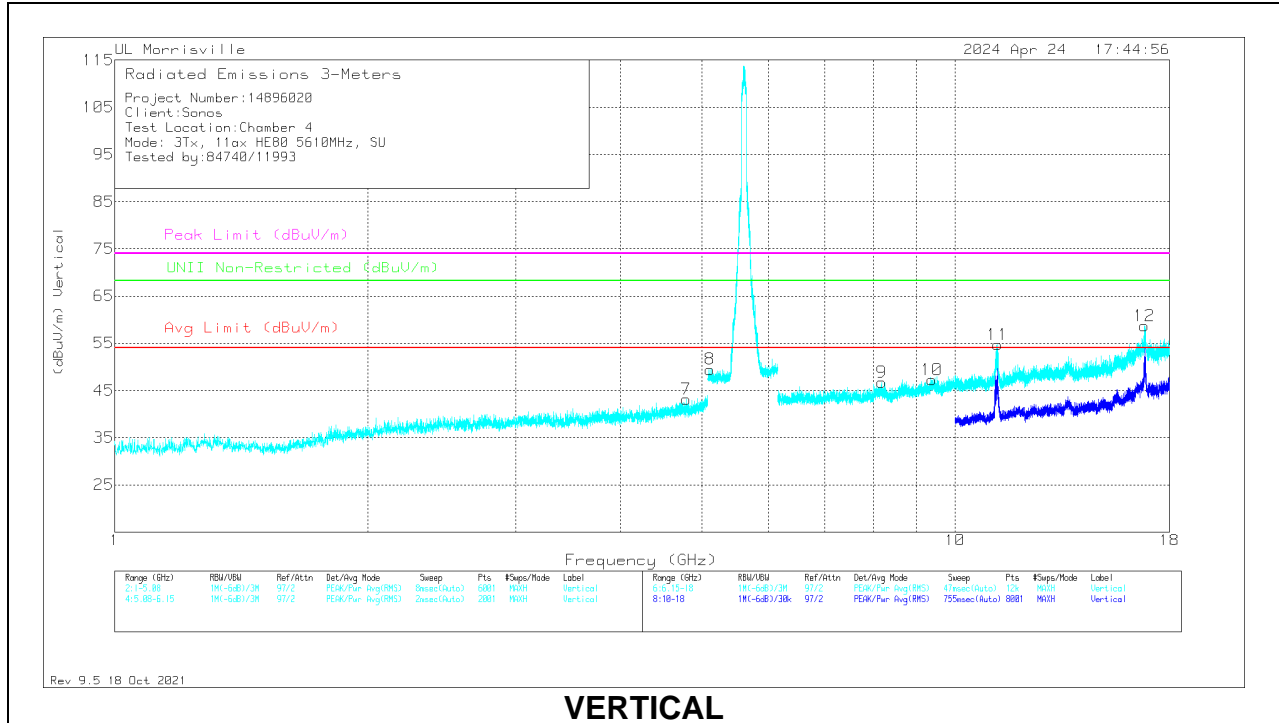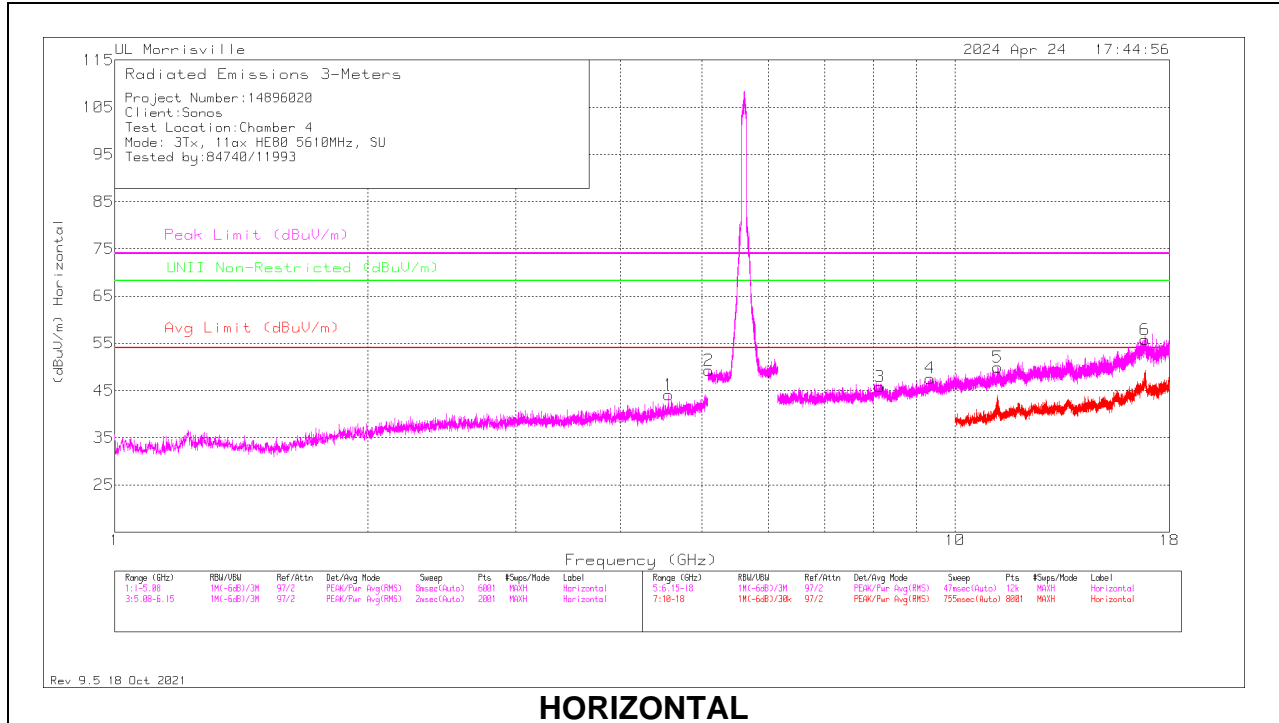

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.56048	41.31	Pk	33.9	-31.1	0	44.11	54	-9.89	74	-29.89	-	-	0-360	100	H
7	*** 4.78488	39.57	Pk	34.1	-30.5	0	43.17	54	-10.83	74	-30.83	-	-	0-360	200	V
2	*** 5.09124	25.37	PK-U	34.1	-9.6	0	49.87	-	-	74	-24.13	-	-	85	299	H
	*** 5.09291	13.9	ADR	34.1	-9.7	.25	38.55	54	-15.45	-	-	-	-	85	299	H
8	*** 5.11524	25.12	PK-U	34.1	-9.4	0	49.82	-	-	74	-24.18	-	-	236	185	V
	*** 5.11185	13.54	ADR	34.1	-9.4	.25	38.49	54	-15.51	-	-	-	-	236	185	V
3	*** 8.13586	36.94	Pk	35.8	-26.9	0	45.84	54	-8.16	74	-28.16	-	-	0-360	100	H
4	*** 9.34456	37.1	Pk	36.5	-26	0	47.6	54	-6.4	74	-26.4	-	-	0-360	100	H
5	*** 11.24738	40.65	PK-U	38	-24.1	0	54.55	-	-	74	-19.45	-	-	36	107	H
	*** 11.24751	27.4	ADR	38	-24.1	.25	41.55	54	-12.45	-	-	-	-	36	107	H
9	*** 8.17734	37.69	Pk	35.8	-26.8	0	46.69	54	-7.31	74	-27.31	-	-	0-360	200	V
10	*** 9.38011	35.89	Pk	36.6	-25.2	0	47.29	54	-6.71	74	-26.71	-	-	0-360	200	V
11	*** 11.25331	43.87	PK-U	38	-24	0	57.87	-	-	74	-16.13	-	-	9	220	V
	*** 11.25331	31.99	ADR	38	-24	.25	46.24	54	-7.76	-	-	-	-	9	220	V
12	16.80414	36.69	Pk	41.9	-19.9	0	58.69	-	-	-	-	68.2	-9.51	0-360	200	V
6	16.84561	33.32	Pk	41.9	-19.4	0	55.82	-	-	-	-	68.2	-12.38	0-360	100	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 PK-U - Maximum Peak
 ADR - RMS average

10.1.22. TX ABOVE 1 GHz 802.11a MODE IN THE 5.8 GHz BAND

3TX CDD MODE

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

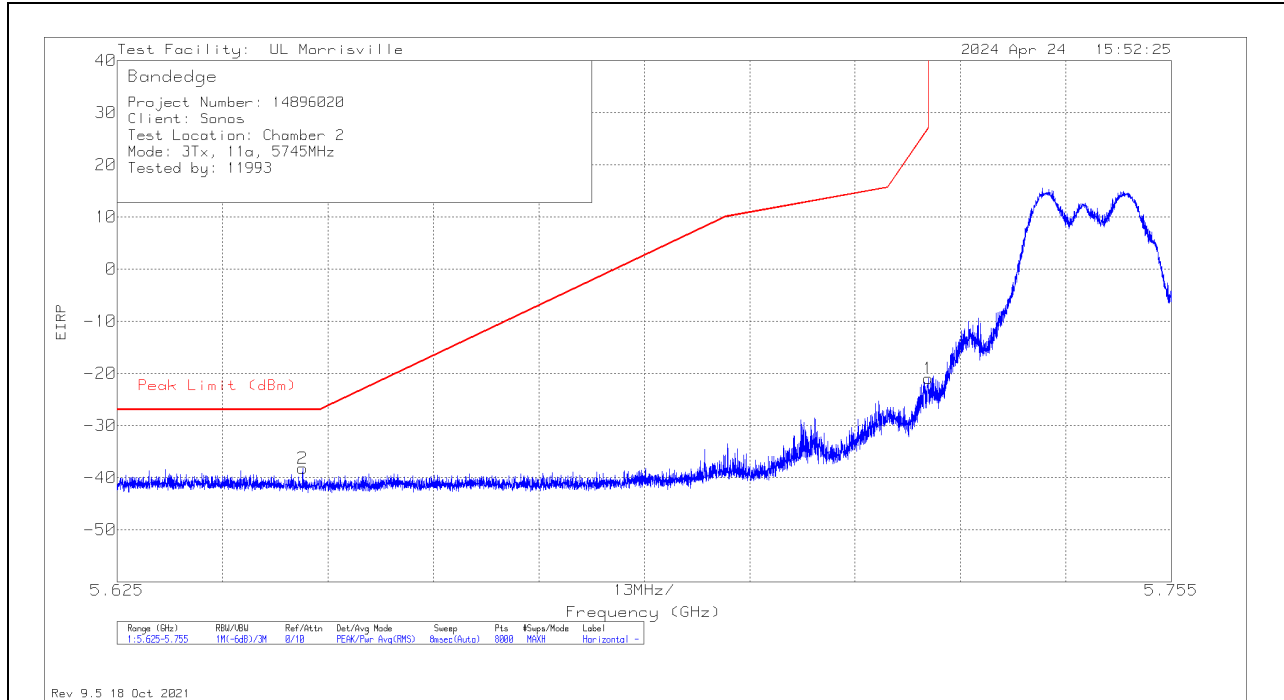

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64787	-71.64	Pk	34.6	-23	11.8	10	-38.24	-27	-11.24	328	190	H
1	5.725	-54.39	Pk	34.6	-23	11.8	10	-20.99	27	-47.99	328	190	H

Pk - Peak detector

VERTICAL RESULT

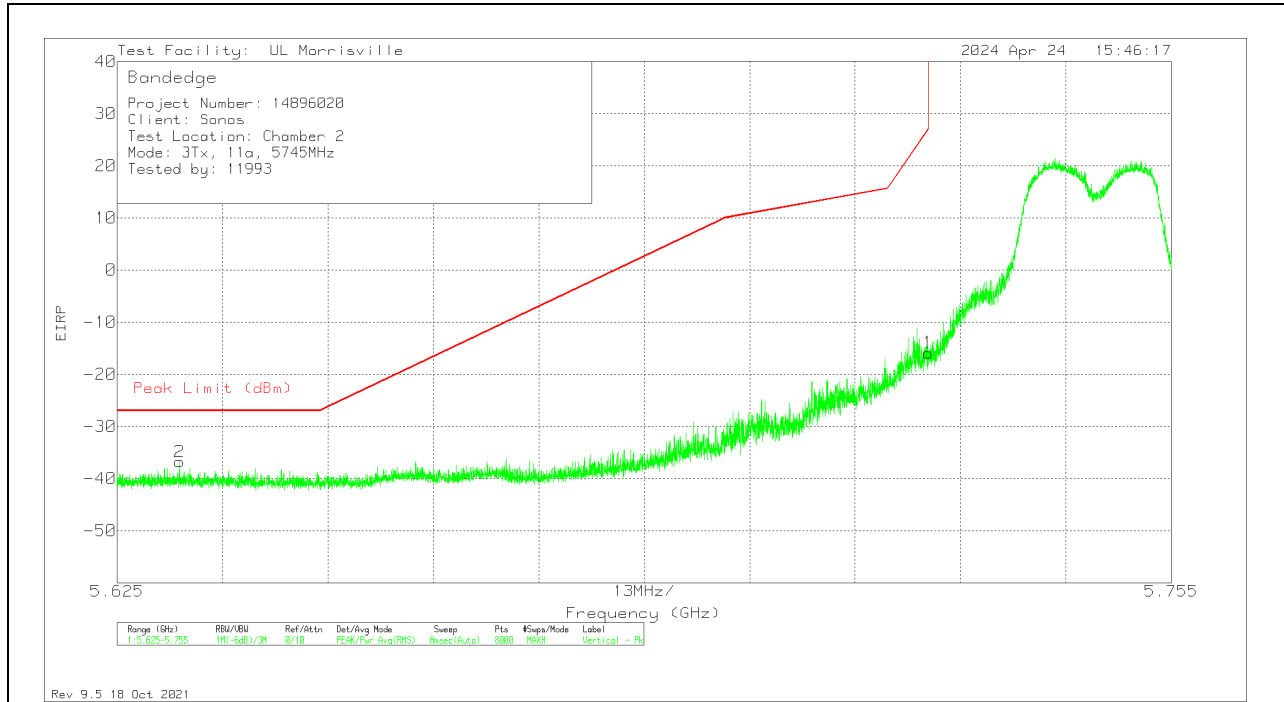


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63269	-70.29	Pk	34.6	-22.9	11.8	10	-36.79	-27	-9.79	122	179	V
1	5.725	-49.29	Pk	34.6	-23	11.8	10	-15.89	27	-42.89	122	179	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

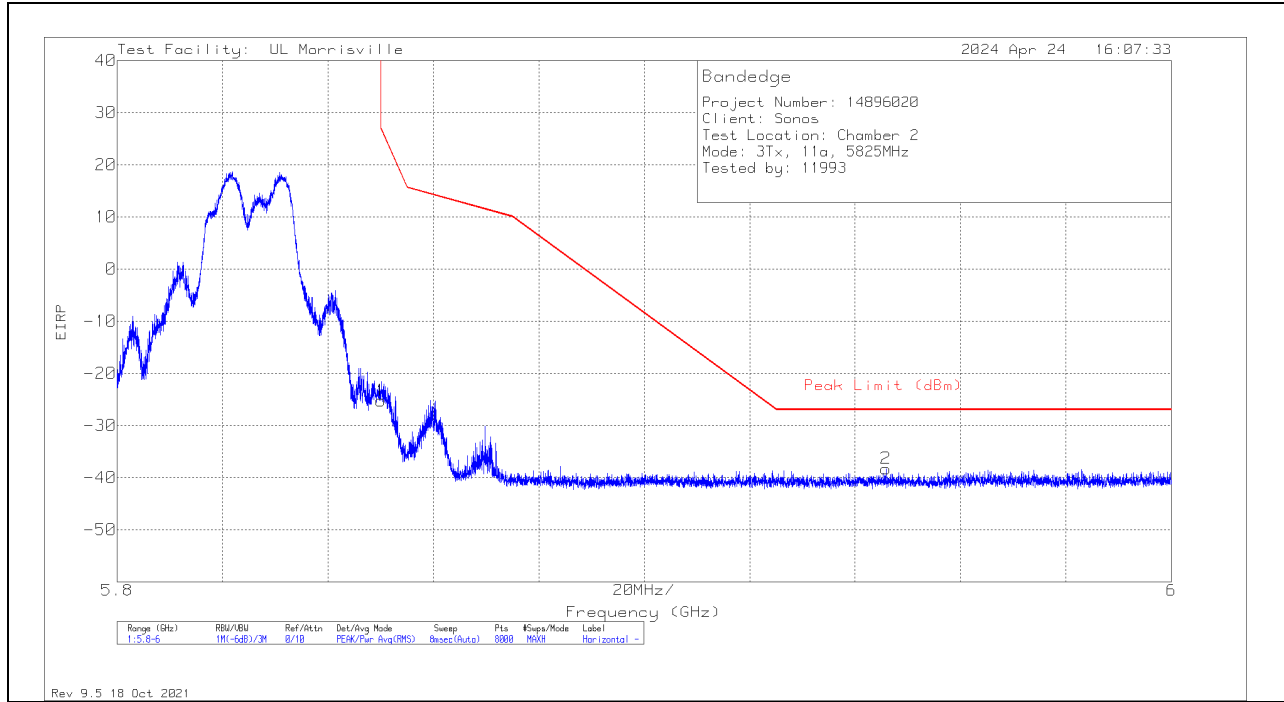

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-59.04	Pk	34.9	-22.9	11.8	10	-25.24	26.99	-52.23	357	258	H
2	5.94584	-72.88	Pk	35.1	-22.4	11.8	10.1	-38.28	-27	-11.28	357	258	H

Pk - Peak detector

VERTICAL RESULT


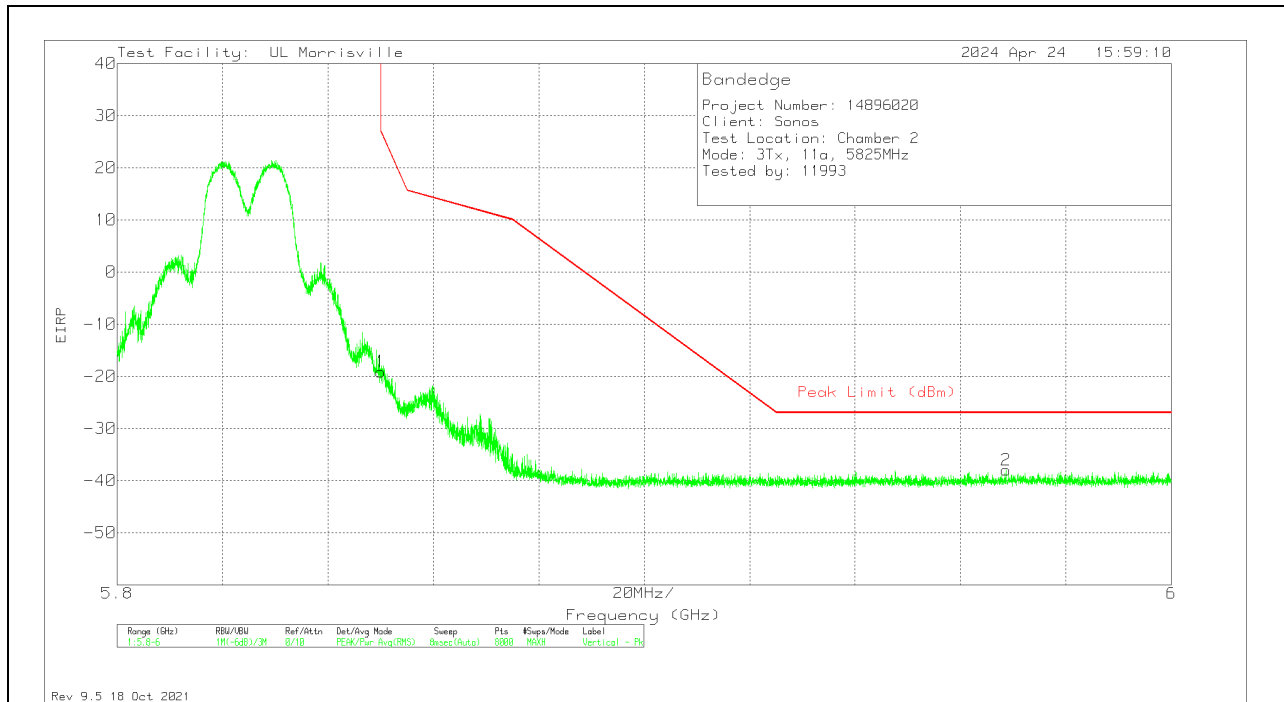


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-52.94	Pk	34.9	-22.9	11.8	10	-19.14	26.99	-46.13	126	235	V
2	5.96865	-72.57	Pk	35.1	-22.3	11.8	10	-37.97	-27	-10.97	126	235	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

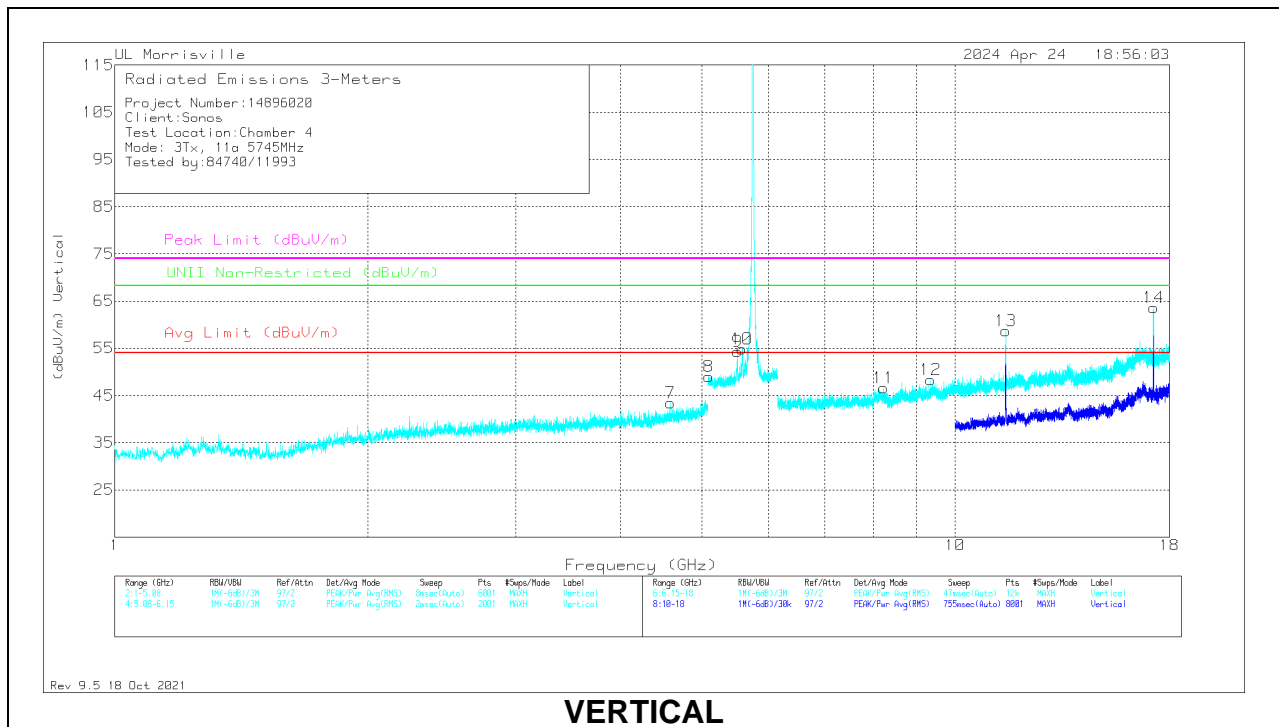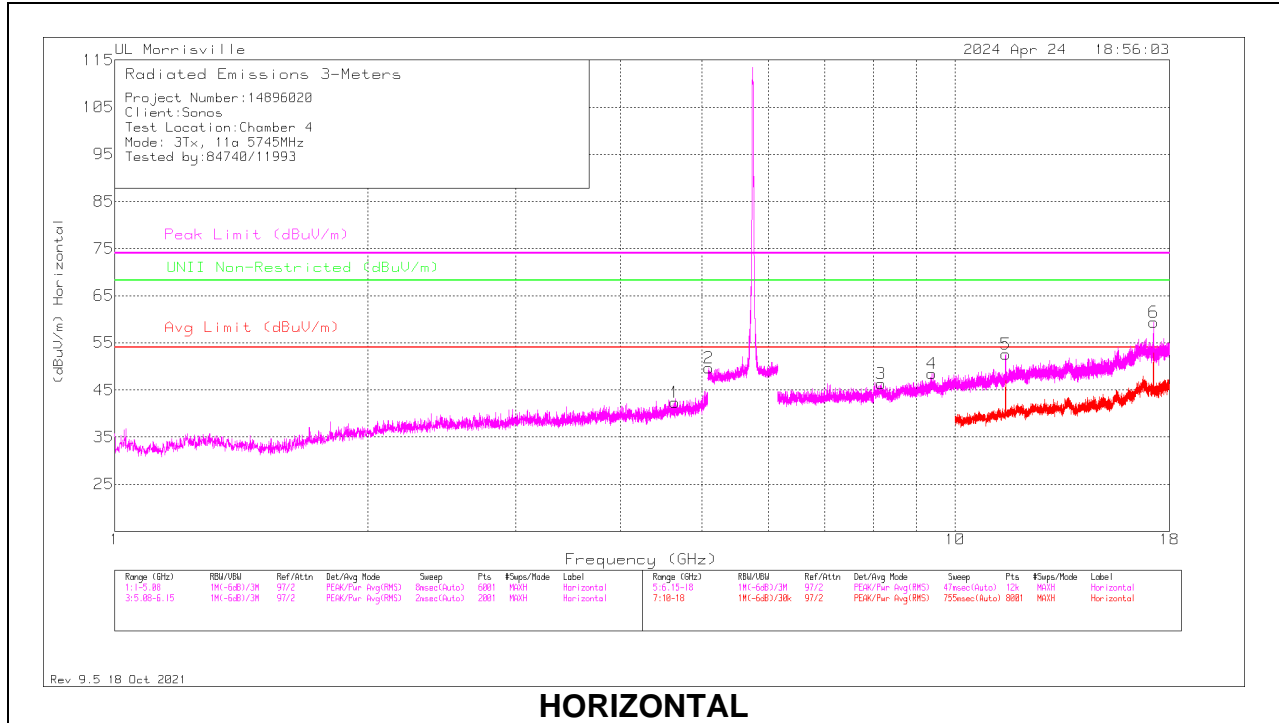


RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.64004	39.1	Pk	34.1	-30.9	0	42.3	54	-11.7	74	-31.7	-	-	0-360	100	H
7	*** 4.58564	40.46	Pk	34	-31	0	43.46	54	-10.54	74	-30.54	-	-	0-360	200	V
2	*** 5.09582	25.05	PK-U	34.1	-9.4	0	49.75	-	-	74	-24.25	-	-	243	193	H
	*** 5.09603	13.61	ADR	34.1	-9.4	.09	38.4	54	-15.6	-	-	-	-	243	193	H
8	*** 5.09681	25.32	PK-U	34.1	-9.4	0	50.02	-	-	74	-23.98	-	-	223	101	V
	*** 5.09383	14.1	ADR	34.1	-9.6	.09	38.69	54	-15.31	-	-	-	-	223	101	V
3	*** 8.17339	37.46	Pk	35.8	-26.9	0	46.36	54	-7.64	74	-27.64	-	-	0-360	100	H
4	*** 9.38226	37.36	PK-U	36.6	-25.1	0	48.86	-	-	74	-25.14	-	-	353	122	H
	*** 9.38454	25.81	ADR	36.6	-25.2	.09	37.3	54	-16.7	-	-	-	-	353	122	H
5	*** 11.4877	41.42	PK-U	38.2	-23.4	0	56.22	-	-	74	-17.78	-	-	80	104	H
	*** 11.48748	30.07	ADR	38.2	-23.5	.09	44.86	54	-9.14	-	-	-	-	80	104	H
11	*** 8.22869	37.73	Pk	35.8	-26.9	0	46.63	54	-7.37	74	-27.37	-	-	0-360	200	V
12	*** 9.35696	37.24	PK-U	36.5	-25.5	0	48.24	-	-	74	-25.76	-	-	231	370	V
	*** 9.3581	25.5	ADR	36.5	-25.4	.09	36.69	54	-17.31	-	-	-	-	231	370	V
13	*** 11.4931	45.8	PK-U	38.2	-23.1	0	60.9	-	-	74	-13.1	-	-	13	217	V
	*** 11.49368	34.2	ADR	38.2	-23.1	.09	49.39	54	-4.61	-	-	-	-	13	217	V
9	5.508	28.3	Pk	34.6	-8.6	0	54.3	-	-	-	-	68.2	-13.9	0-360	100	V
10	5.58076	29.24	Pk	34.6	-9	0	54.84	-	-	-	-	68.2	-13.36	0-360	100	V
6	17.23173	37.37	Pk	41.2	-19.2	0	59.37	-	-	-	-	68.2	-8.83	0-360	100	H
14	17.23079	44.91	PK-U	41.2	-19.3	0	66.81	-	-	-	-	68.2	-1.39	29	327	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 PK-U - Maximum Peak
 ADR - RMS average

MID CHANNEL RESULTS

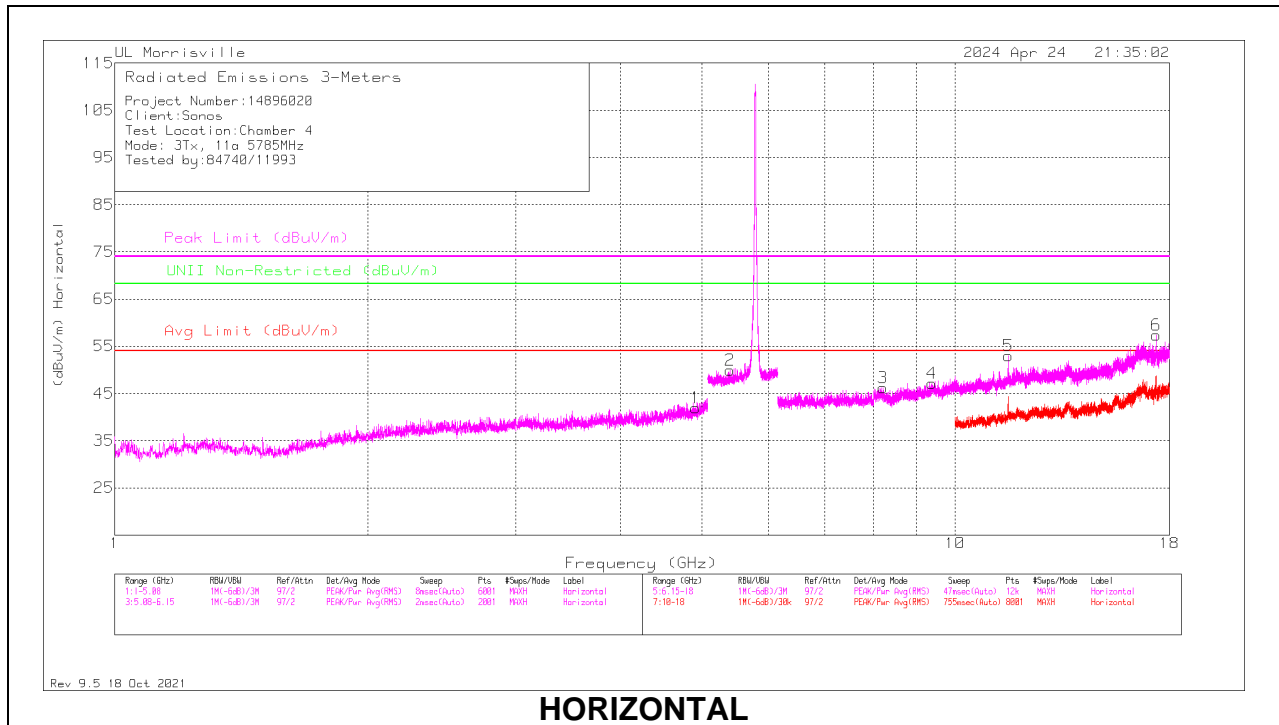

HORIZONTAL

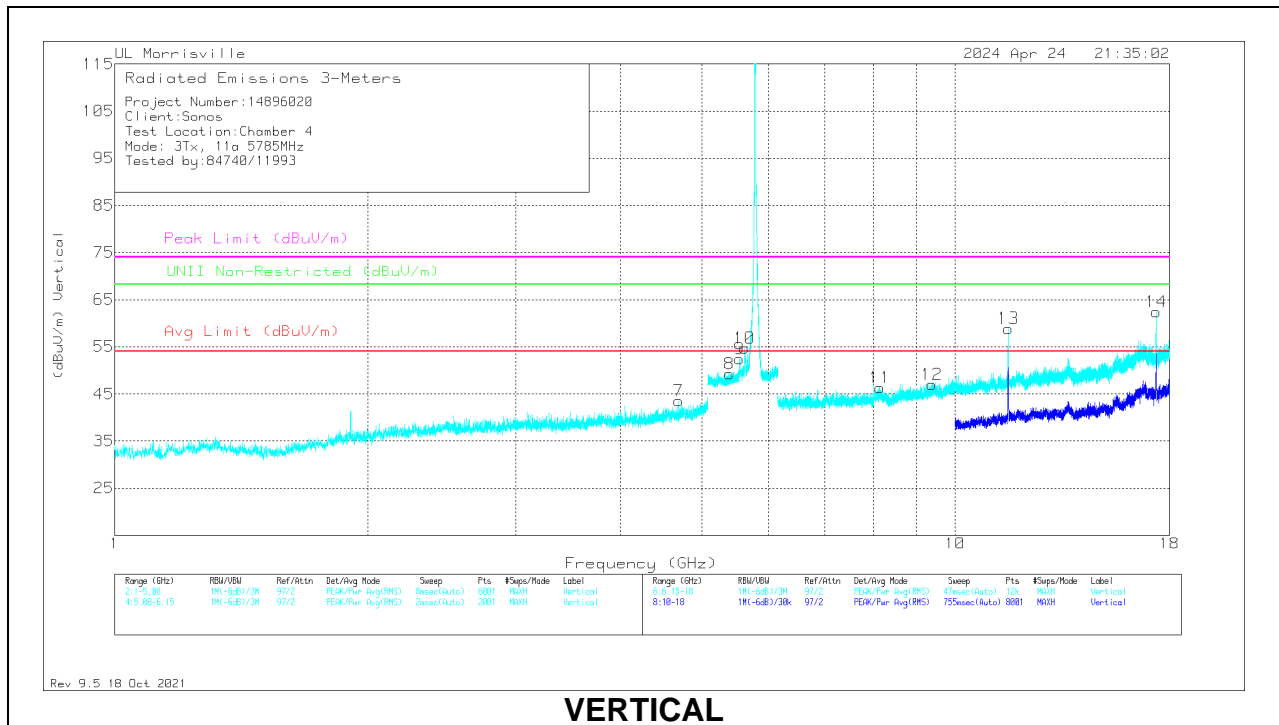

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.9134	39.51	Pk	34	-31.5	0	42.01	54	-11.99	74	-31.99	-	-	0-360	100	H
7	*** 4.69172	41.03	Pk	34.1	-31.6	0	43.53	54	-10.47	74	-30.47	-	-	0-360	200	V
2	*** 5.39769	24.81	PK-U	34.6	-9.1	0	50.31	-	-	74	-23.69	-	-	56	299	H
	*** 5.40064	13.06	ADR	34.6	-9.2	.09	38.55	54	-15.45	-	-	-	-	56	299	H
8	*** 5.39061	25.27	PK-U	34.6	-9.1	0	50.77	-	-	74	-23.23	-	-	352	178	V
	*** 5.39108	13.58	ADR	34.6	-9.1	.09	39.17	54	-14.83	-	-	-	-	352	178	V
3	*** 8.21684	37.3	Pk	35.8	-26.9	0	46.2	54	-7.8	74	-27.8	-	-	0-360	100	H
4	*** 9.39493	35.88	Pk	36.6	-25.3	0	47.18	54	-6.82	74	-26.82	-	-	0-360	100	H
5	*** 11.56669	41.62	PK-U	38.3	-23.3	0	56.62	-	-	74	-17.38	-	-	95	101	H
	*** 11.56697	29.91	ADR	38.3	-23.2	.09	45.1	54	-8.9	-	-	-	-	95	101	H
11	*** 8.13981	37.41	Pk	35.8	-26.9	0	46.31	54	-7.69	74	-27.69	-	-	0-360	200	V
12	*** 9.38406	35.5	Pk	36.6	-25.1	0	47	54	-7	74	-27	-	-	0-360	200	V
13	*** 11.56815	47.91	PK-U	38.3	-23.2	0	63.01	-	-	74	-10.99	-	-	58	188	V
	*** 11.5688	35.68	ADR	38.3	-23.4	.09	50.67	54	-3.33	-	-	-	-	58	188	V
9	5.54492	26.67	Pk	34.6	-8.8	0	52.47	-	-	-	-	68.2	-15.73	0-360	200	V
10	5.61768	28.56	Pk	34.6	-8.4	0	54.76	-	-	-	-	68.2	-13.44	0-360	200	V
14	17.35827	45.18	PK-U	41.2	-19.6	0	66.78	-	-	-	-	68.2	-1.42	19	194	V
6	17.36405	35.53	Pk	41.2	-19.4	0	57.33	-	-	-	-	68.2	-10.87	0-360	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - Maximum Peak

ADR - RMS average

HIGH CHANNEL RESULTS

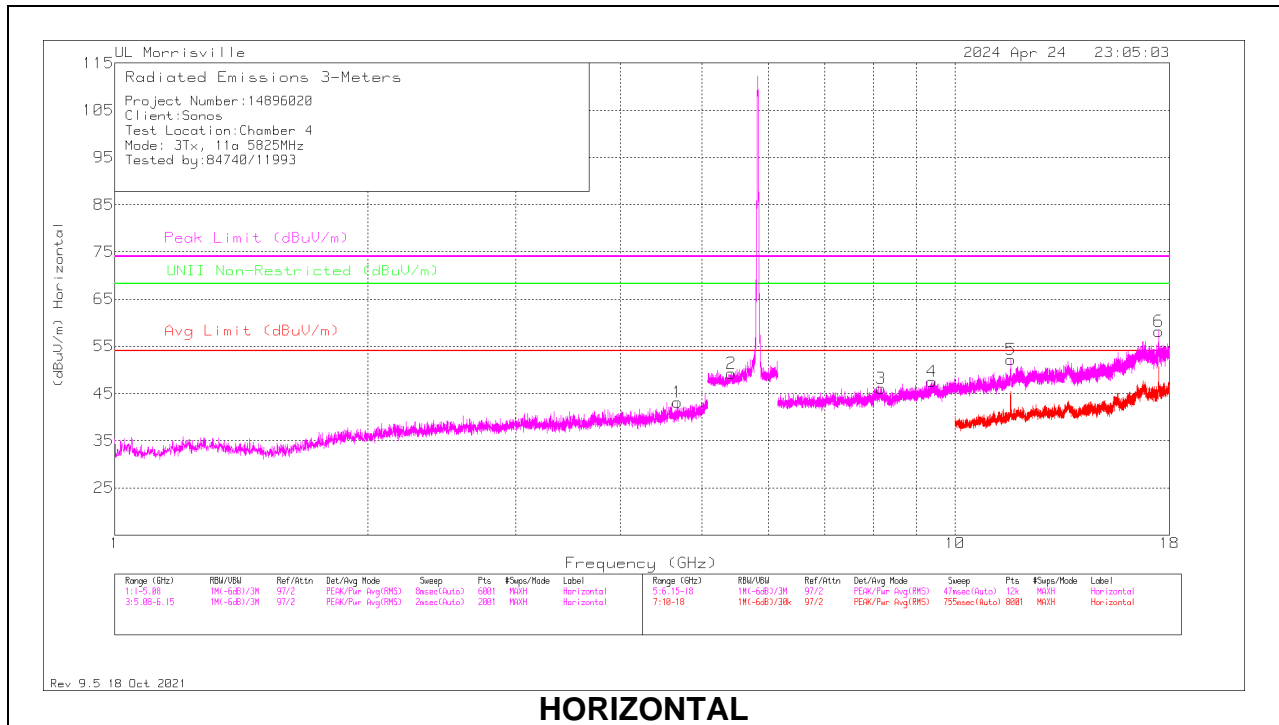

HORIZONTAL

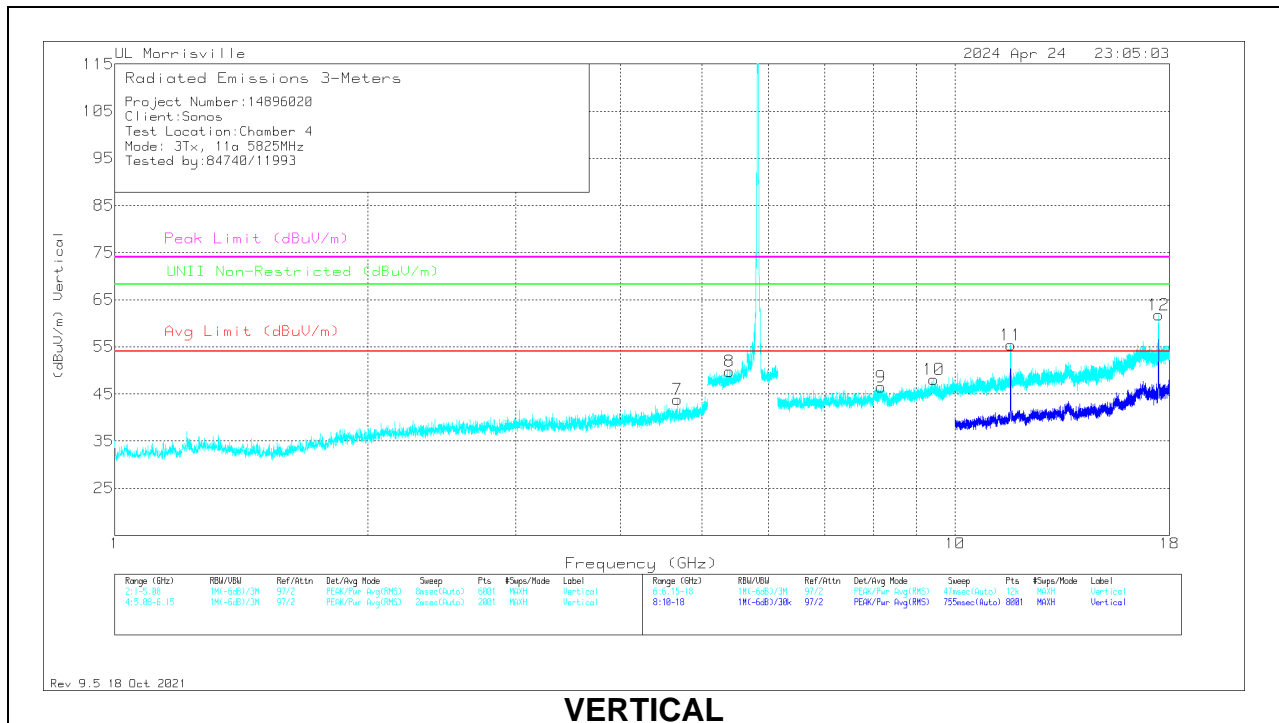

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 4.67132	39.93	Pk	34.1	-30.9	0	43.13	54	-10.87	74	-30.87	-	-	0-360	100	H
7	* ** 4.67064	40.57	Pk	34.1	-30.9	0	43.77	54	-10.23	74	-30.23	-	-	0-360	200	V
2	* ** 5.41951	24.55	PK-U	34.6	-8.9	0	50.25	-	-	74	-23.75	-	-	326	389	H
	* ** 5.42061	12.98	ADR	34.6	-8.9	.09	38.77	54	-15.23	-	-	-	-	326	389	H
8	* ** 5.38983	25.08	PK-U	34.6	-9.1	0	50.58	-	-	74	-23.42	-	-	256	228	V
	* ** 5.39072	13.26	ADR	34.6	-9.1	.09	38.85	54	-15.15	-	-	-	-	256	228	V
3	* ** 8.16746	37.09	Pk	35.8	-26.8	0	46.09	54	-7.91	74	-27.91	-	-	0-360	100	H
4	* ** 9.38209	36	Pk	36.6	-25.1	0	47.5	54	-6.5	74	-26.5	-	-	0-360	100	H
5	* ** 11.64758	42.6	PK-U	38.3	-23.7	0	57.2	-	-	74	-16.8	-	-	93	102	H
	* ** 11.64828	30.57	ADR	38.3	-23.7	.09	45.26	54	-8.74	-	-	-	-	93	102	H
9	* ** 8.16351	37.56	Pk	35.8	-26.9	0	46.46	54	-7.54	74	-27.54	-	-	0-360	200	V
10	* ** 9.43446	37.04	PK-U	36.7	-25.6	0	48.14	-	-	74	-25.86	-	-	91	270	V
	* ** 9.43513	25.91	ADR	36.7	-25.6	.09	37.1	54	-16.9	-	-	-	-	91	270	V
11	* ** 11.65582	46.94	PK-U	38.3	-23.1	0	62.14	-	-	74	-11.86	-	-	357	220	V
	* ** 11.65588	34.08	ADR	38.3	-23.1	.09	49.37	54	-4.63	-	-	-	-	357	220	V
12	17.47421	42.33	PK-U	41.2	-20	0	63.53	-	-	-	-	68.2	-4.67	26	175	V
6	17.47663	36.09	Pk	41.3	-19.2	0	58.19	-	-	-	-	68.2	-10.01	0-360	100	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 PK-U - Maximum Peak
 ADR - RMS average

10.1.23. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.8 GHz BAND

3TX CDD MODE

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

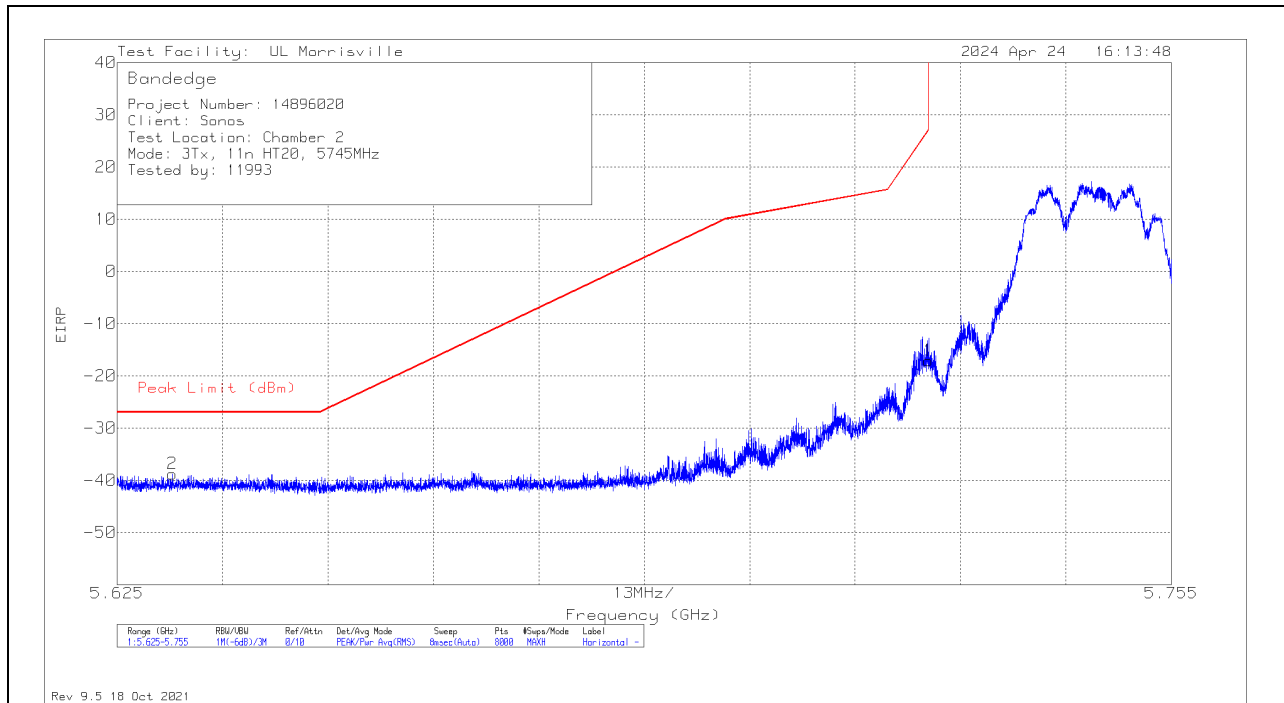

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63183	-72.25	Pk	34.6	-22.9	11.8	10	-38.75	-27	-11.75	146	260	H
1	5.725	-50.5	Pk	34.6	-23	11.8	10	-17.1	27	-44.1	146	260	H

Pk - Peak detector

VERTICAL RESULT

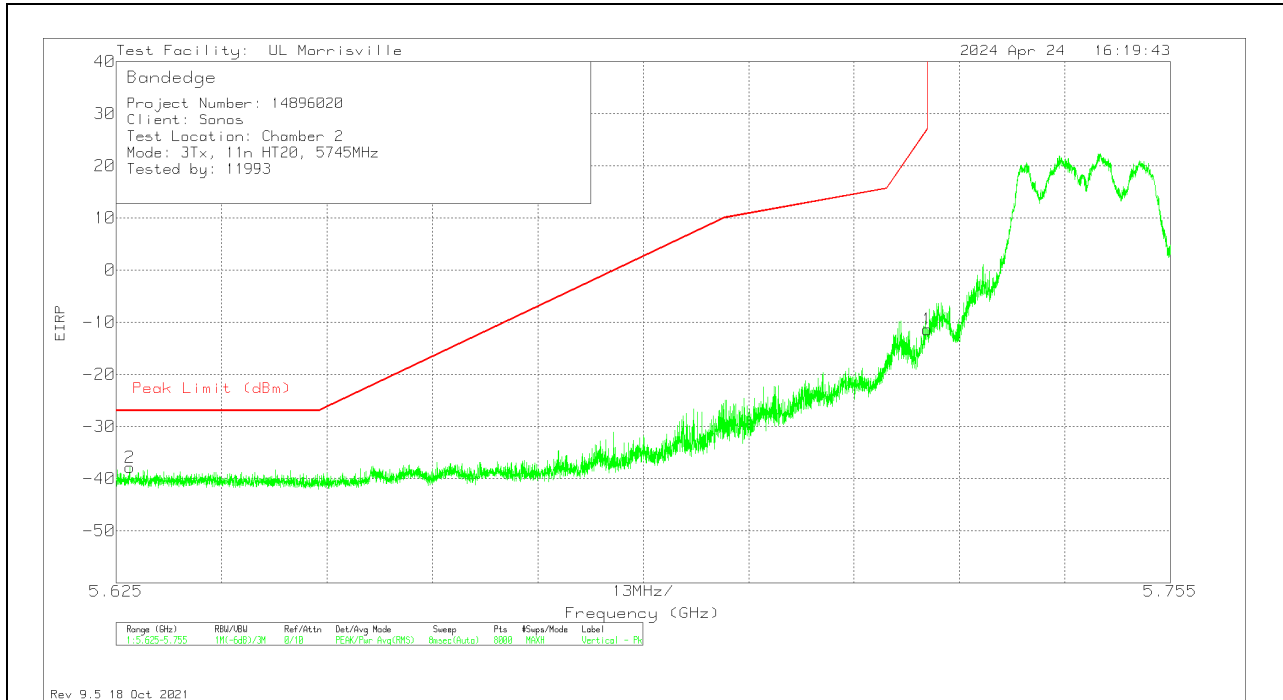


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62667	-71.26	Pk	34.6	-23	11.8	10	-37.86	-27	-10.86	134	108	V
1	5.725	-44.79	Pk	34.6	-23	11.8	10	-11.39	27	-38.39	134	108	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

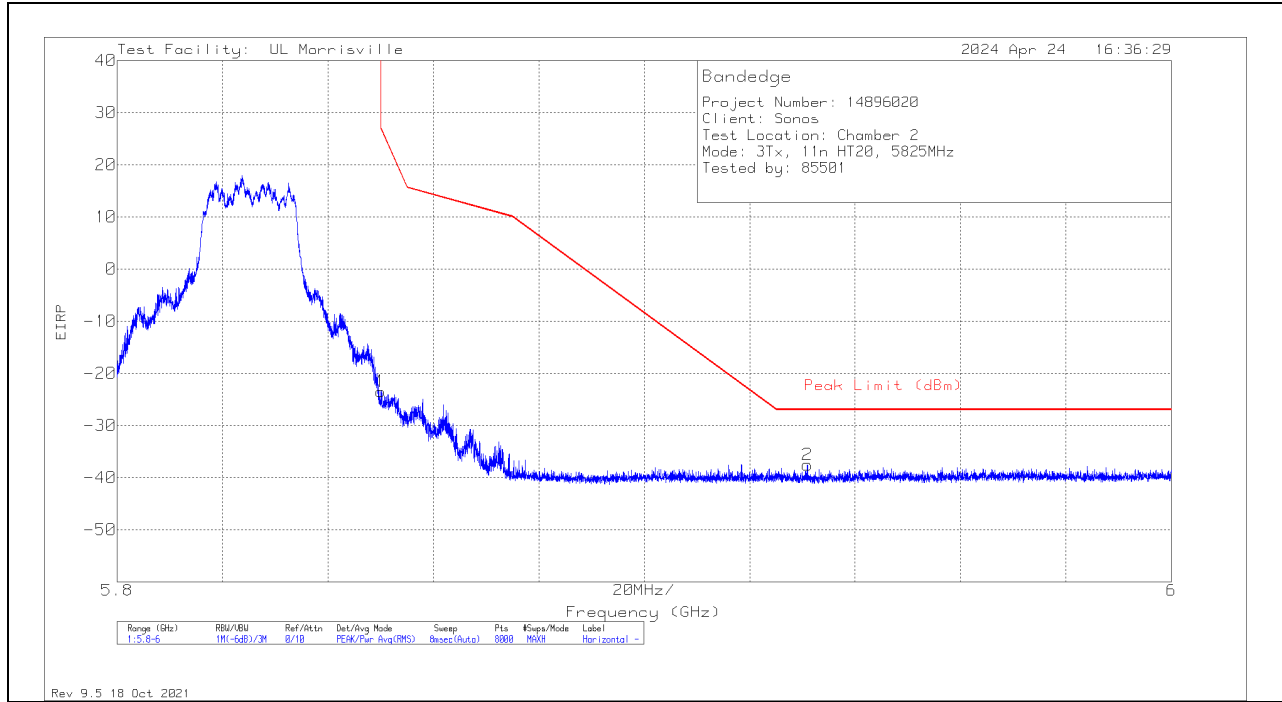

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-57.28	Pk	34.9	-22.9	11.8	10	0	-23.48	26.99	-50.47	29	172	H
2	5.93097	-71.74	Pk	35.1	-22.7	11.8	10	0	-37.54	-27	-10.54	29	172	H

Pk - Peak detector

VERTICAL RESULT

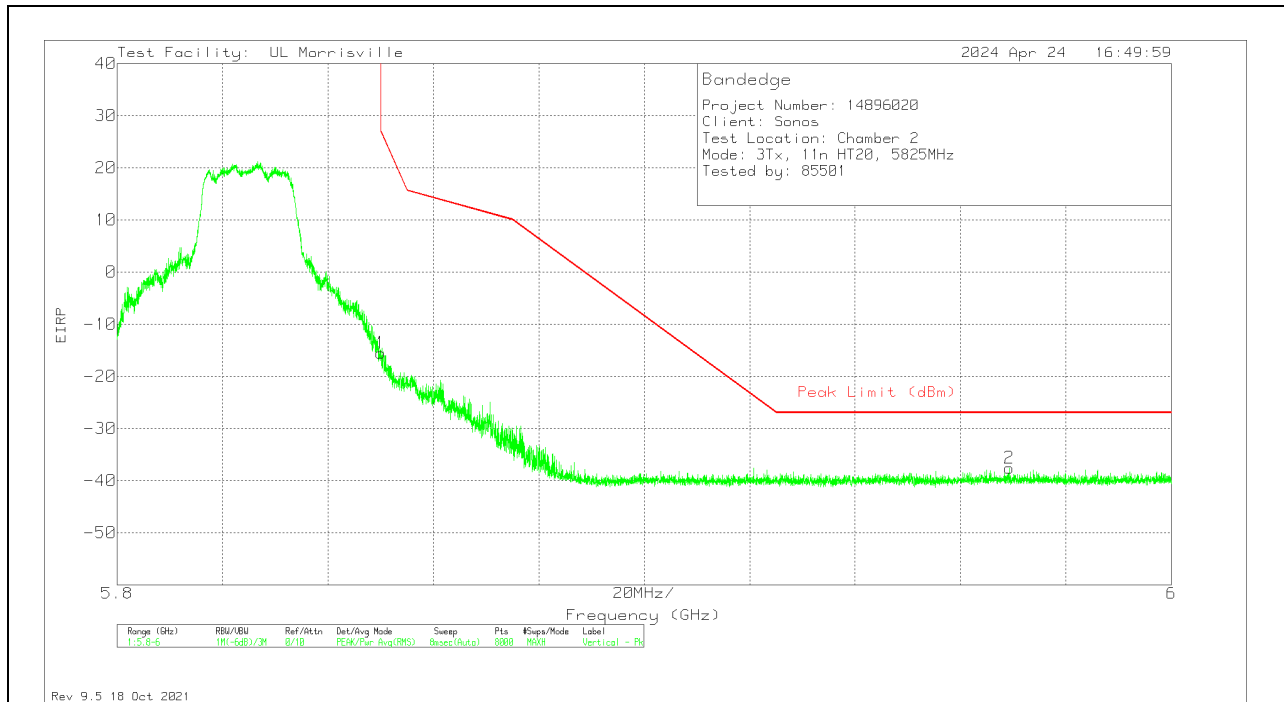

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-49.34	PK	34.9	-22.9	11.8	10	0	-15.54	26.99	-42.53	143	161	V
2	5.96922	-72.17	PK	35.1	-22.3	11.8	10	0	-37.57	-27	-10.57	143	161	V


Pk - Peak detector

10.1.24. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.8 GHz BAND

3TX CDD MODE

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

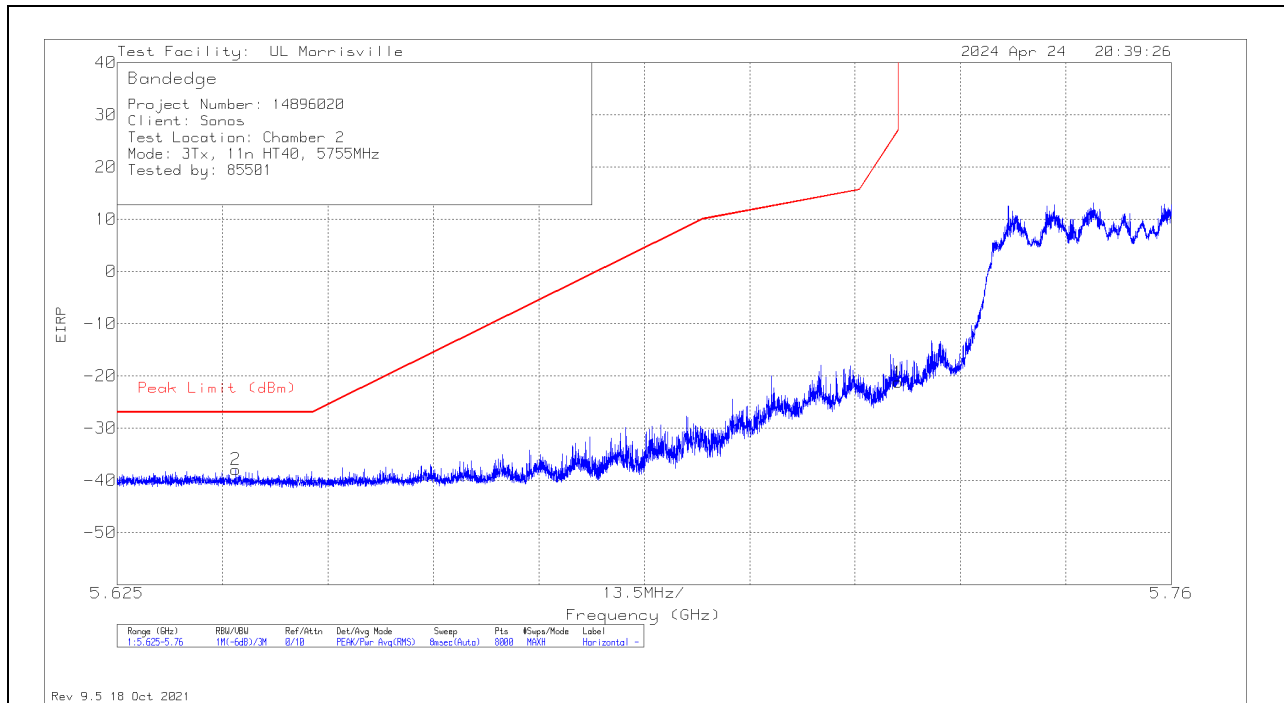

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64021	-71.45	Pk	34.6	-22.9	11.8	10	0	-37.95	-27	-10.95	144	187	H
1	5.725	-54.62	Pk	34.6	-23	11.8	10	0	-21.22	26.99	-48.21	144	187	H

Pk - Peak detector

VERTICAL RESULT

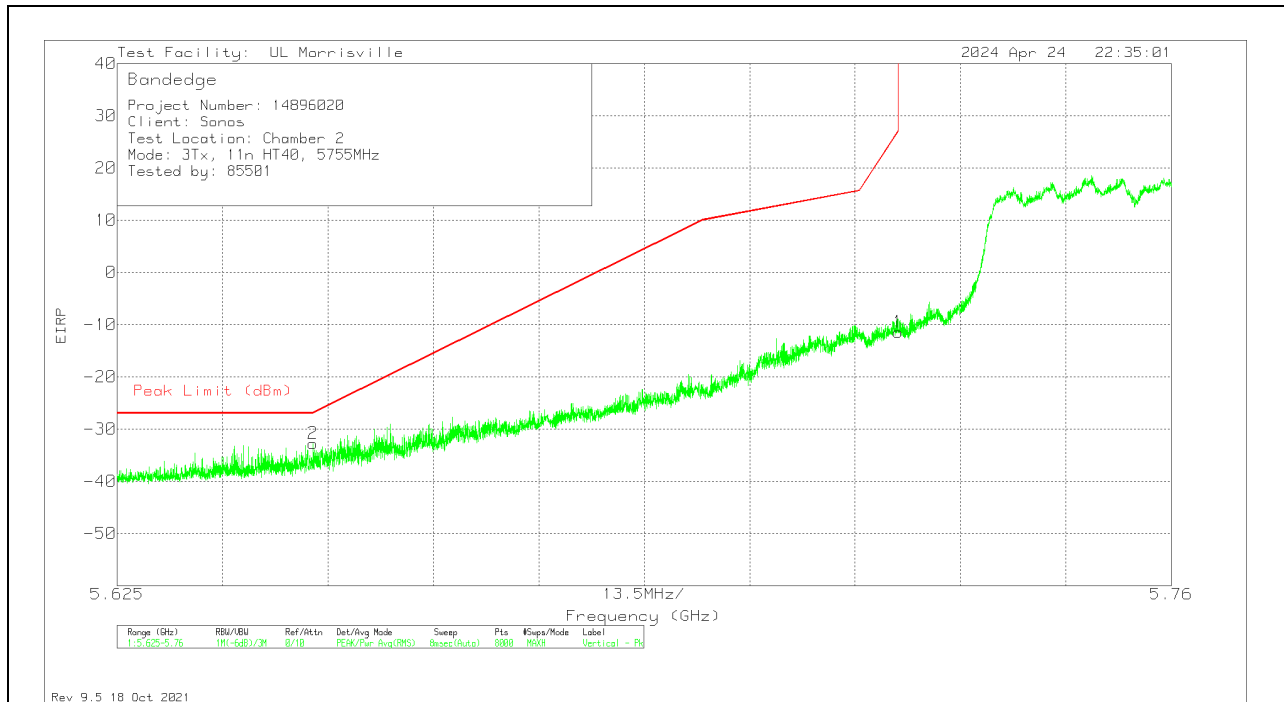


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.6501	-66.15	Pk	34.6	-23	11.8	10	0	-32.75	-26.93	-5.82	144	188	V
1	5.725	-44.82	Pk	34.6	-23	11.8	10	0	-11.42	26.99	-38.41	144	188	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

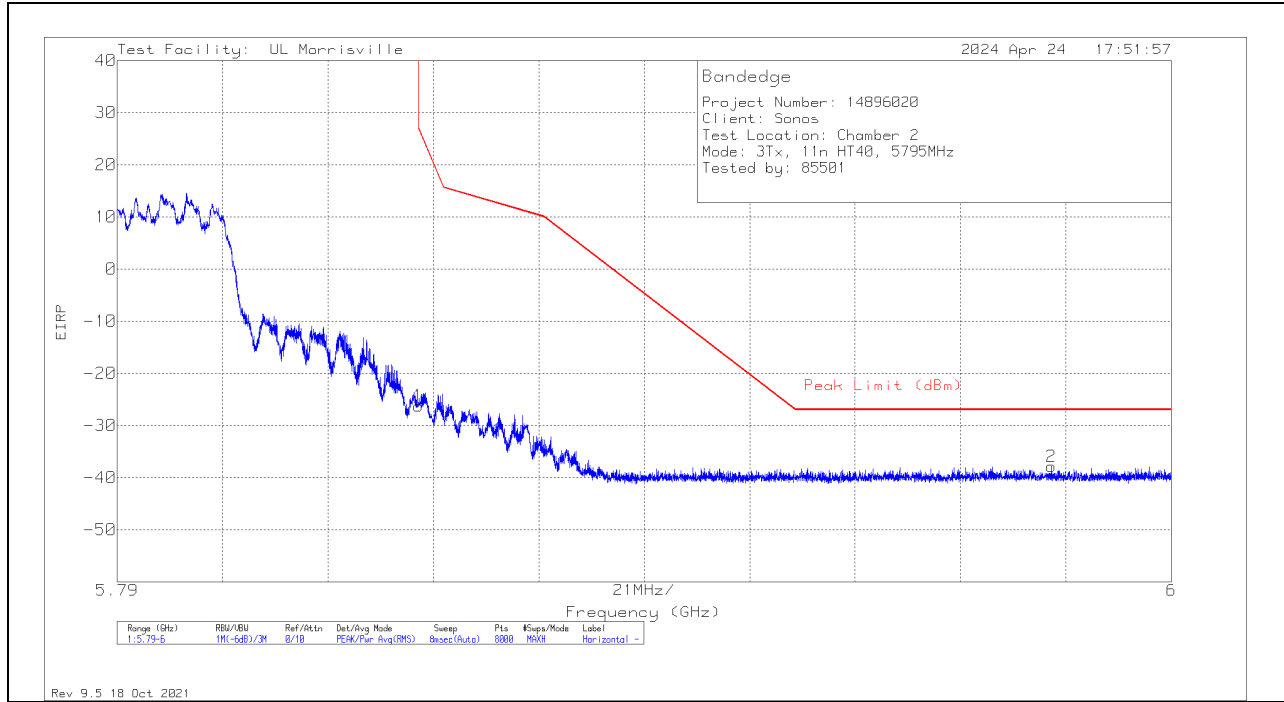

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-60.04	Pk	34.9	-22.9	11.8	10	0	-26.24	26.97	-53.21	326	210	H
2	5.97608	-72.48	Pk	35.2	-22.4	11.8	10	0	-37.88	-27	-10.88	326	210	H

Pk - Peak detector

VERTICAL RESULT

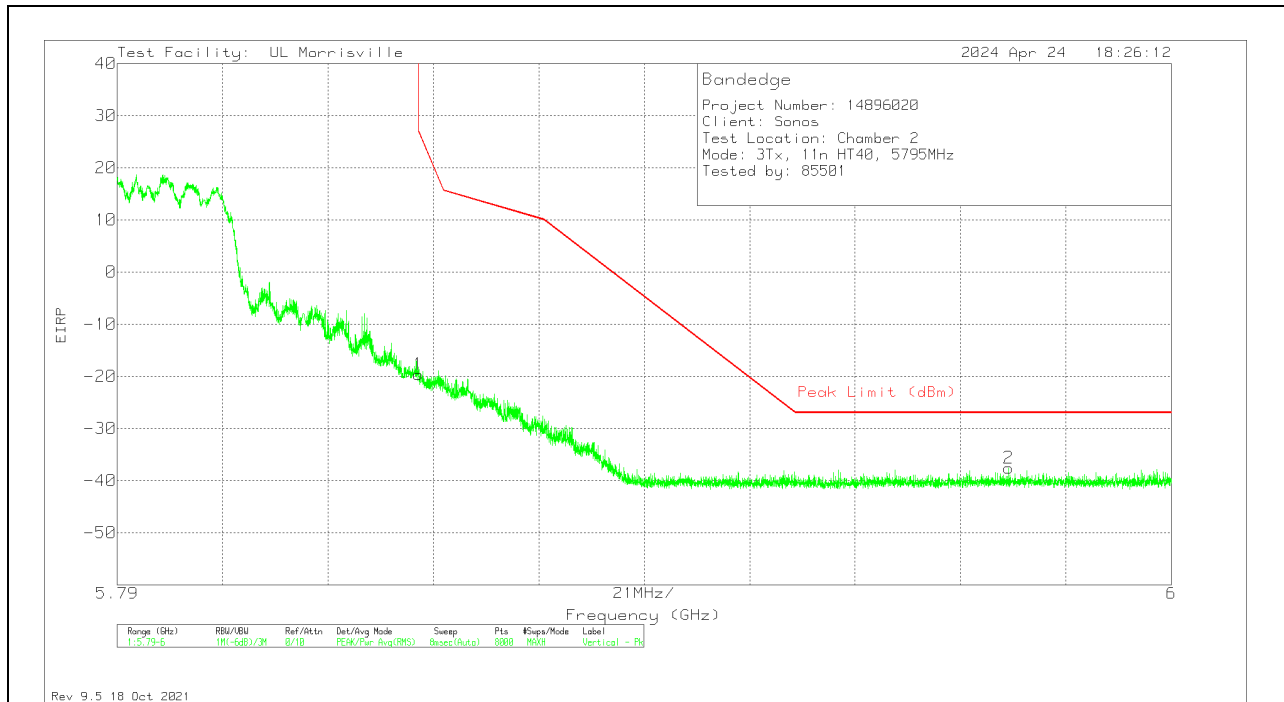

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-53.42	Pk	34.9	-22.9	11.8	10	0	-19.62	26.97	-46.59	149	211	V
2	5.96763	-72.18	Pk	35.1	-22.3	11.8	10	0	-37.58	-27	-10.58	149	211	V


Pk - Peak detector

10.1.25. TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.8 GHz BAND

3TX CDD MODE

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

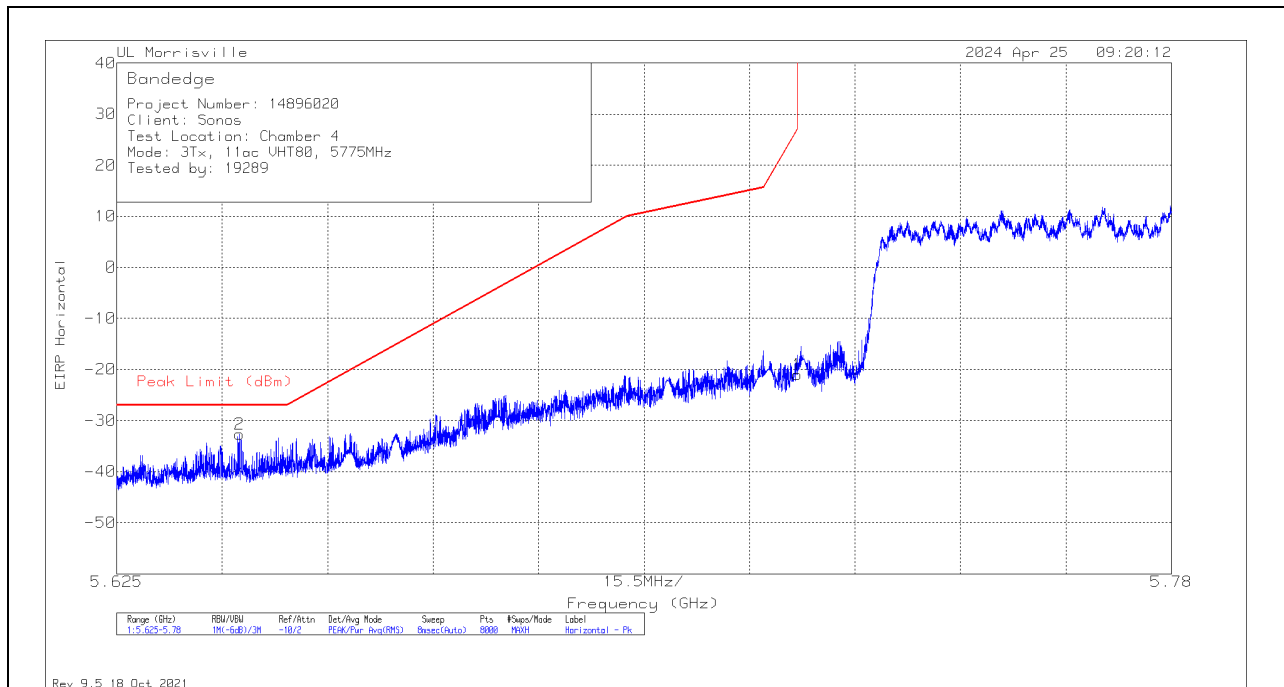

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.643	-70.41	Pk	34.7	-8.8	11.8	-32.71	-27	-5.71	24	206	H
1	5.72499	-58.79	Pk	34.7	-8.7	11.8	-20.99	26.97	-47.96	24	206	H

Pk - Peak detector

VERTICAL RESULT

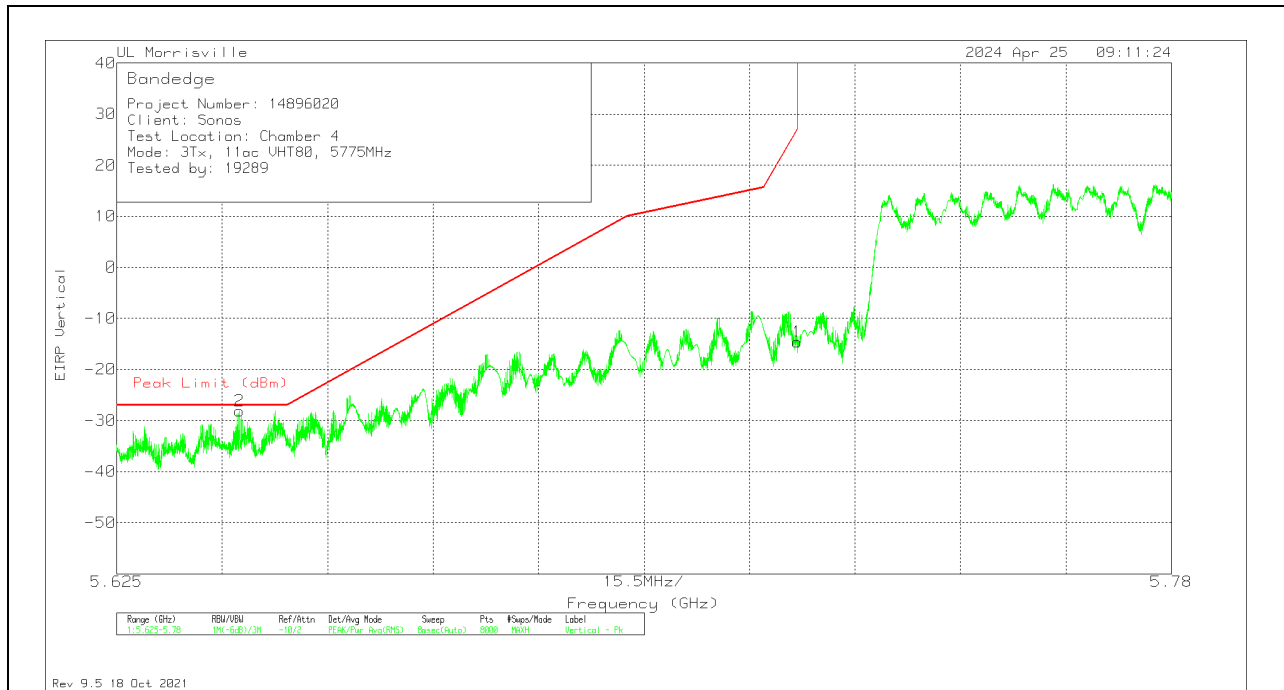


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64302	-65.8	Pk	34.7	-8.8	11.8	-28.1	-27	-1.1	115	110	V
1	5.72499	-52.4	Pk	34.7	-8.7	11.8	-14.6	26.97	-41.57	115	110	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

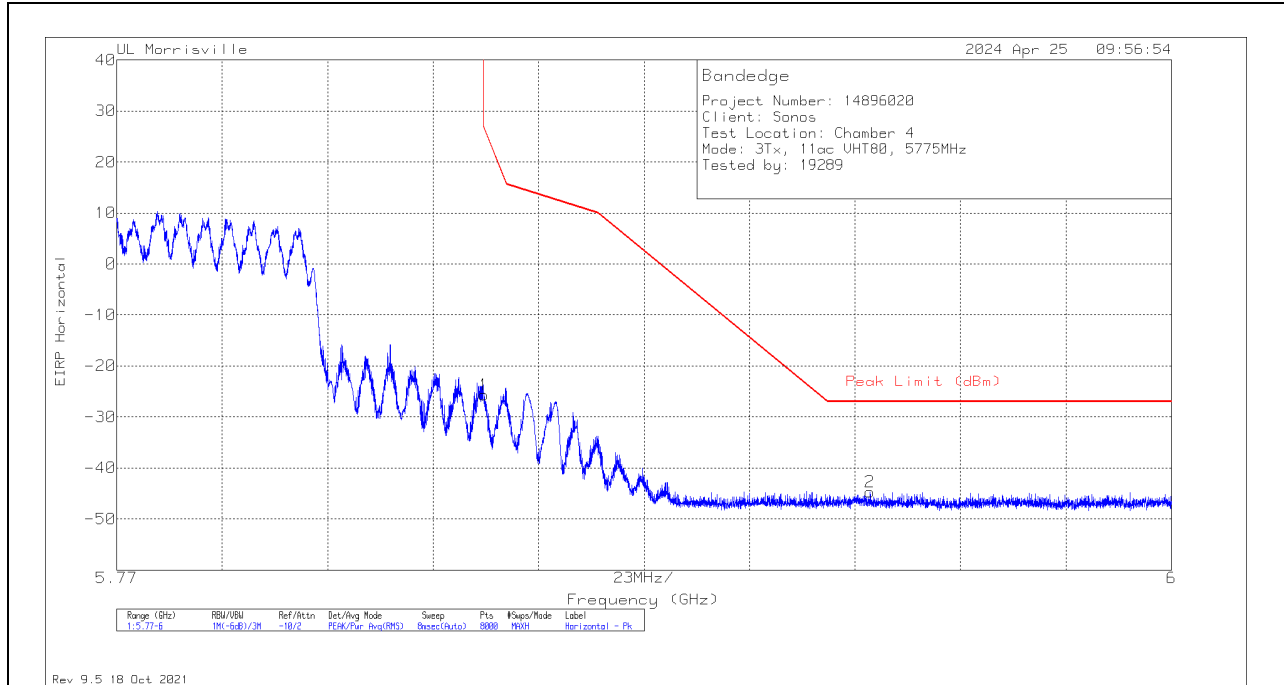

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-63.88	Pk	34.8	-8.4	11.8	-25.68	26.95	-52.63	326	207	H
2	5.9343	-83.2	Pk	35	-8.3	11.8	-44.7	-27	-17.7	326	207	H

Pk - Peak detector

VERTICAL RESULT

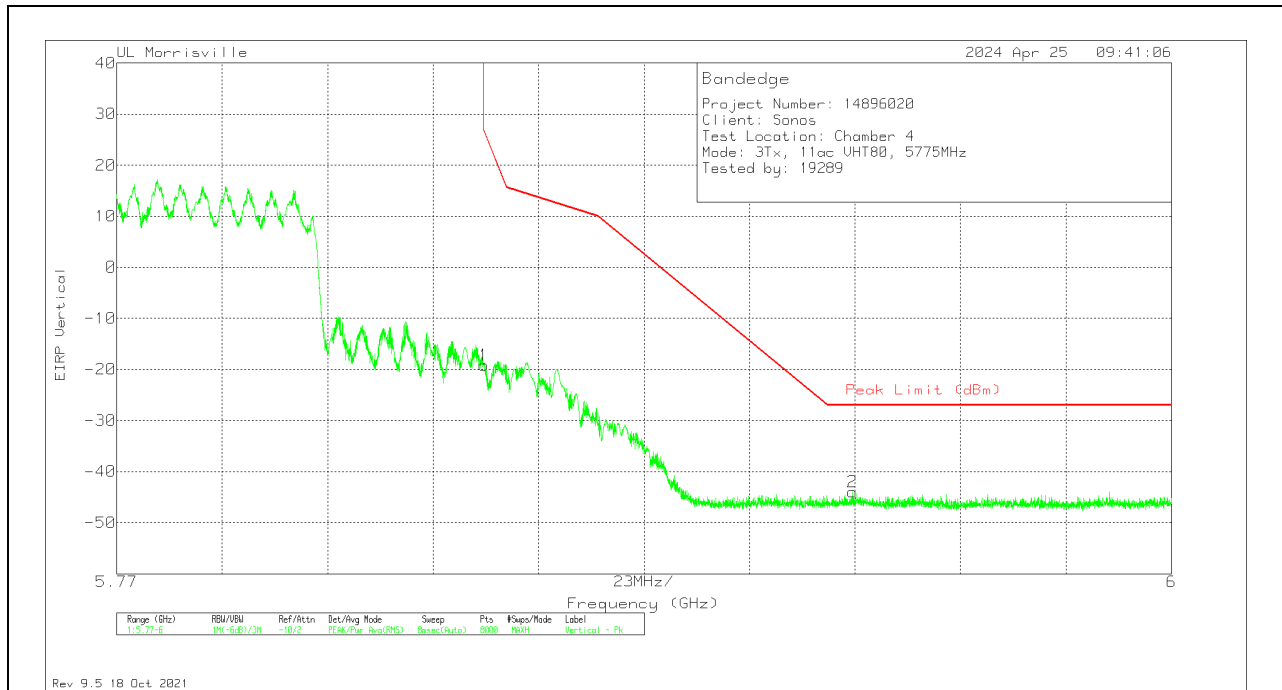

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-57.35	Pk	34.8	-8.4	11.8	-19.15	26.95	-46.1	120	151	V
2	5.93048	-82.69	Pk	35	-8.1	11.8	-43.99	-27	-16.99	120	151	V


Pk - Peak detector

10.1.26. TX ABOVE 1 GHz 802.11ax HE20 MODE IN THE 5.8 GHz BAND

3TX CDD MODE – SU

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

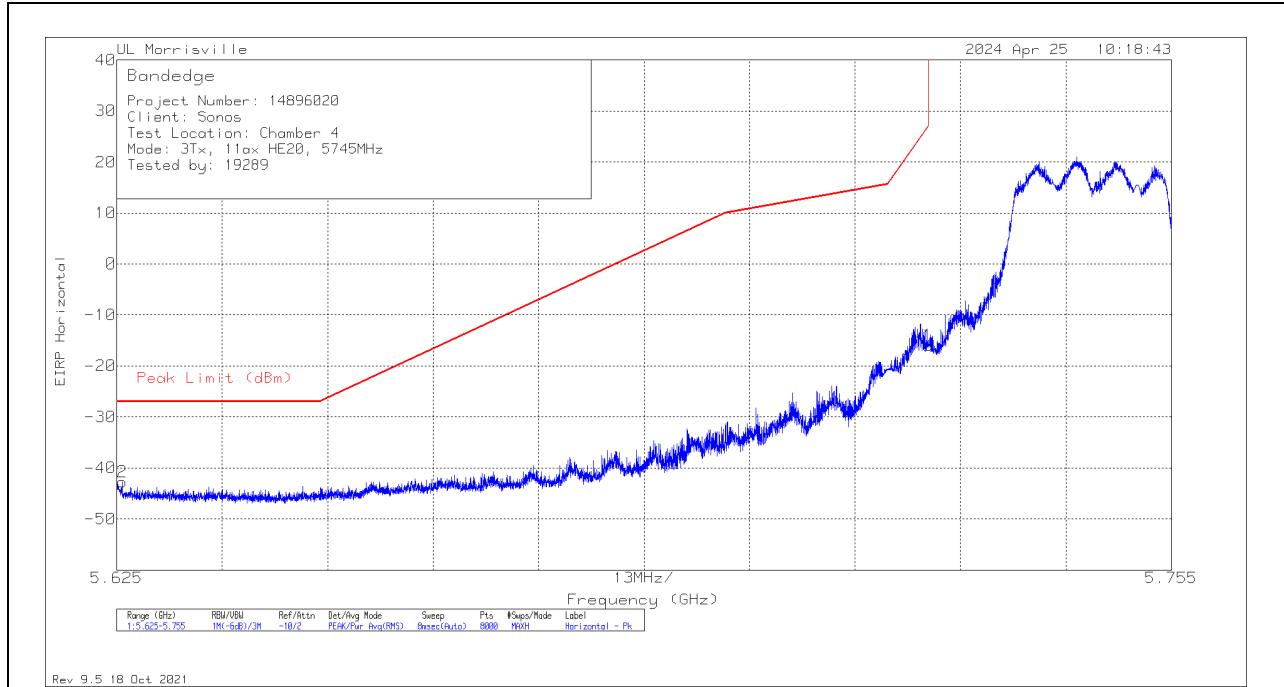

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62568	-80.79	Pk	34.7	-8.5	11.8	-42.79	-27	-15.79	4	206	H
1	5.725	-53.72	Pk	34.7	-8.7	11.8	-15.92	27	-42.92	4	206	H

Pk - Peak detector

VERTICAL RESULT

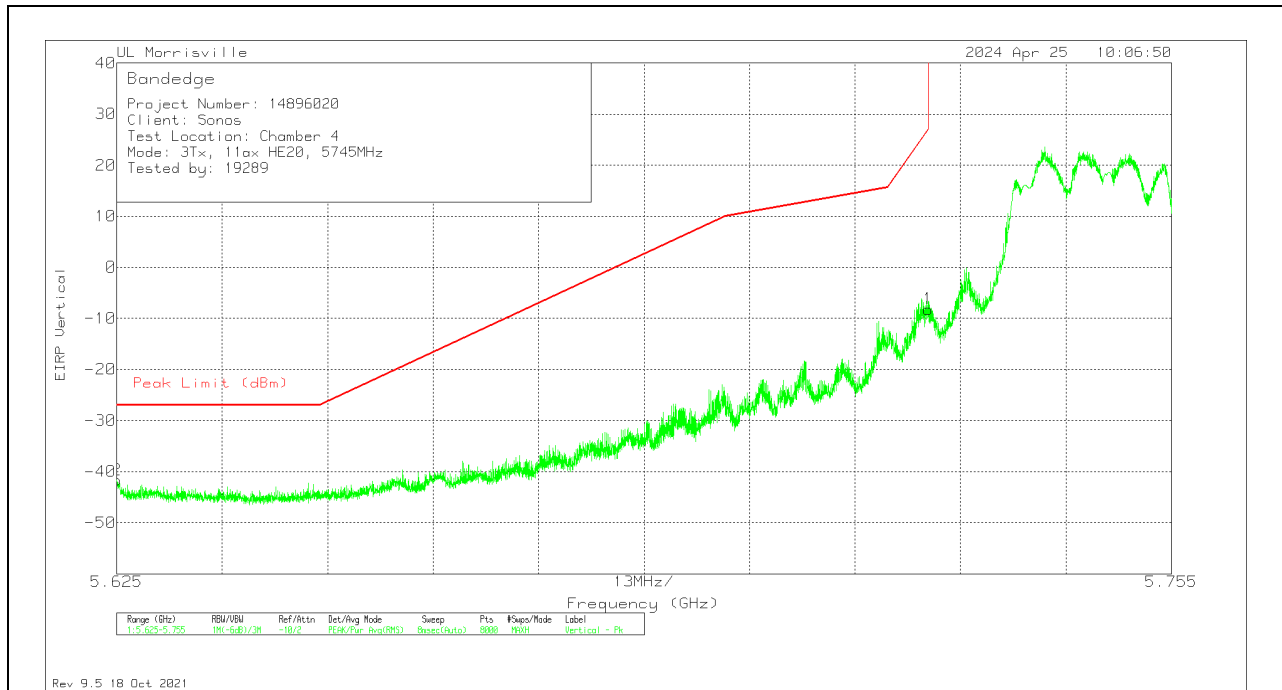


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62502	-79.62	Pk	34.7	-8.5	11.8	-41.62	-27	-14.62	150	210	V
1	5.725	-45.97	Pk	34.7	-8.7	11.8	-8.17	27	-35.17	150	210	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

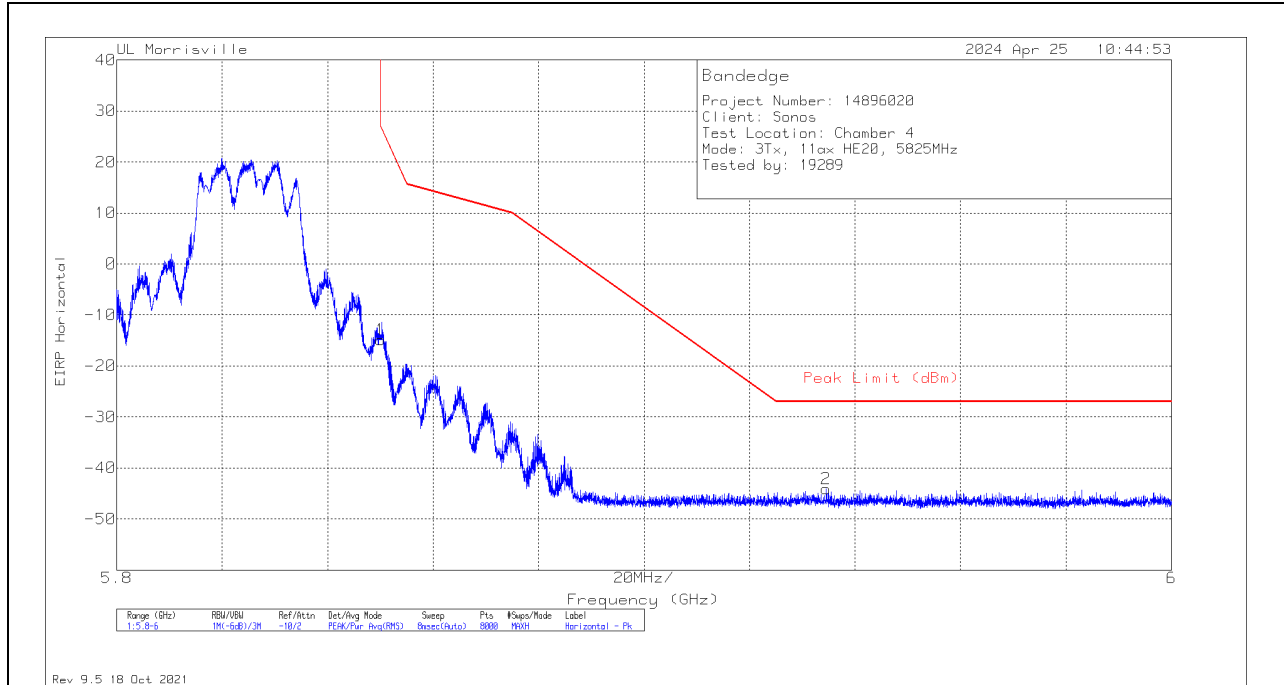

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-53.01	Pk	34.8	-8.4	11.8	-14.81	26.99	-41.8	145	252	H
2	5.93452	-82.63	Pk	35	-8.3	11.8	-44.13	-27	-17.13	145	252	H

Pk - Peak detector

VERTICAL RESULT

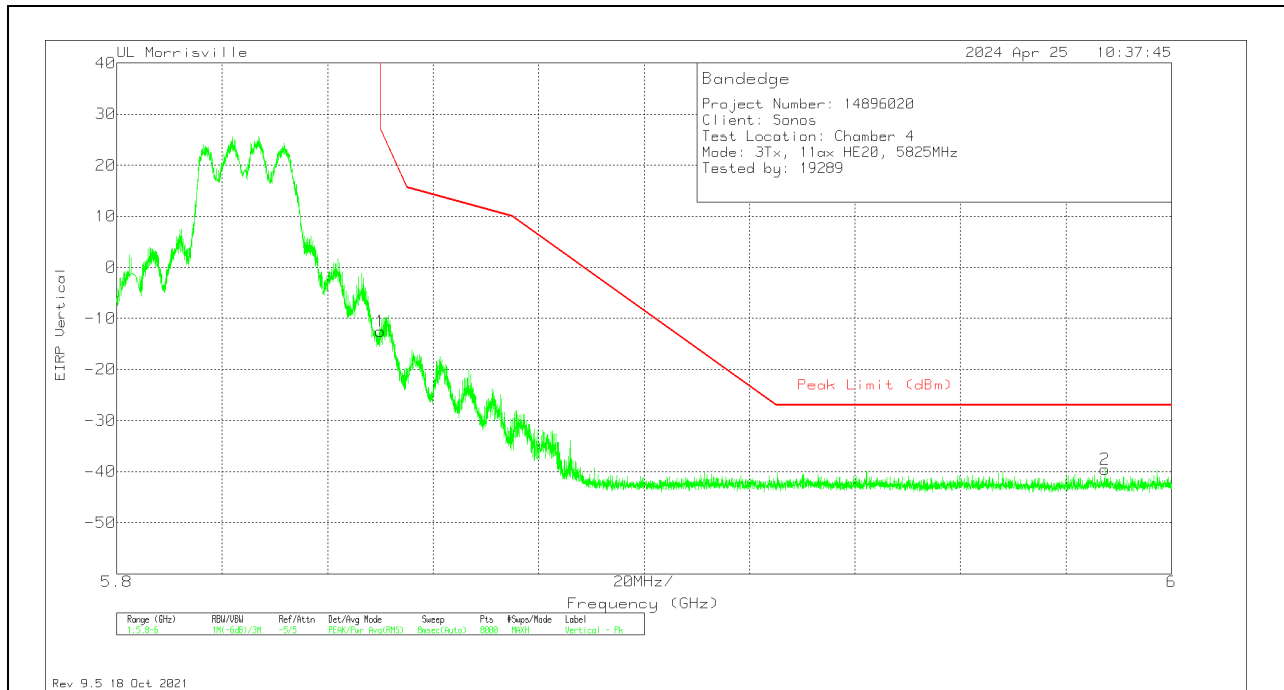


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-50.71	Pk	34.8	-8.4	11.8	-12.51	26.99	-39.5	121	182	V
2	5.9874	-78	Pk	35	-8.3	11.8	-39.5	-27	-12.5	121	182	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

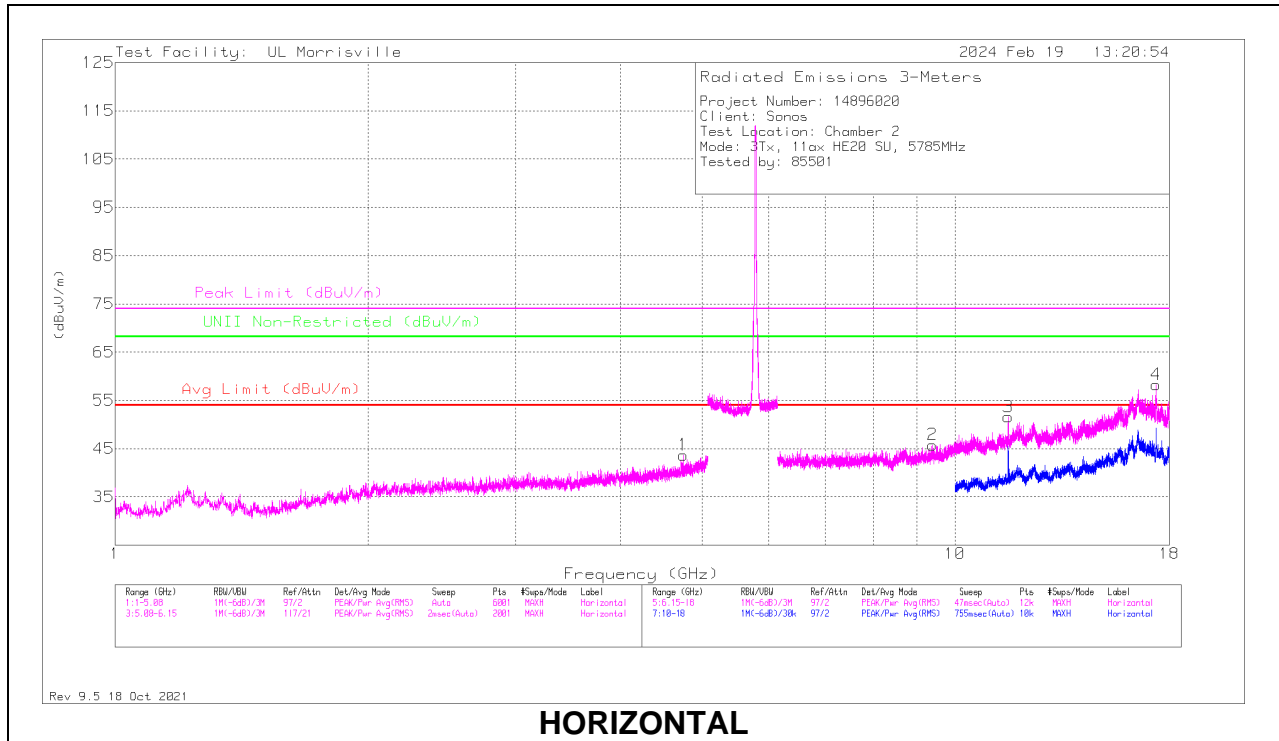

HORIZONTAL

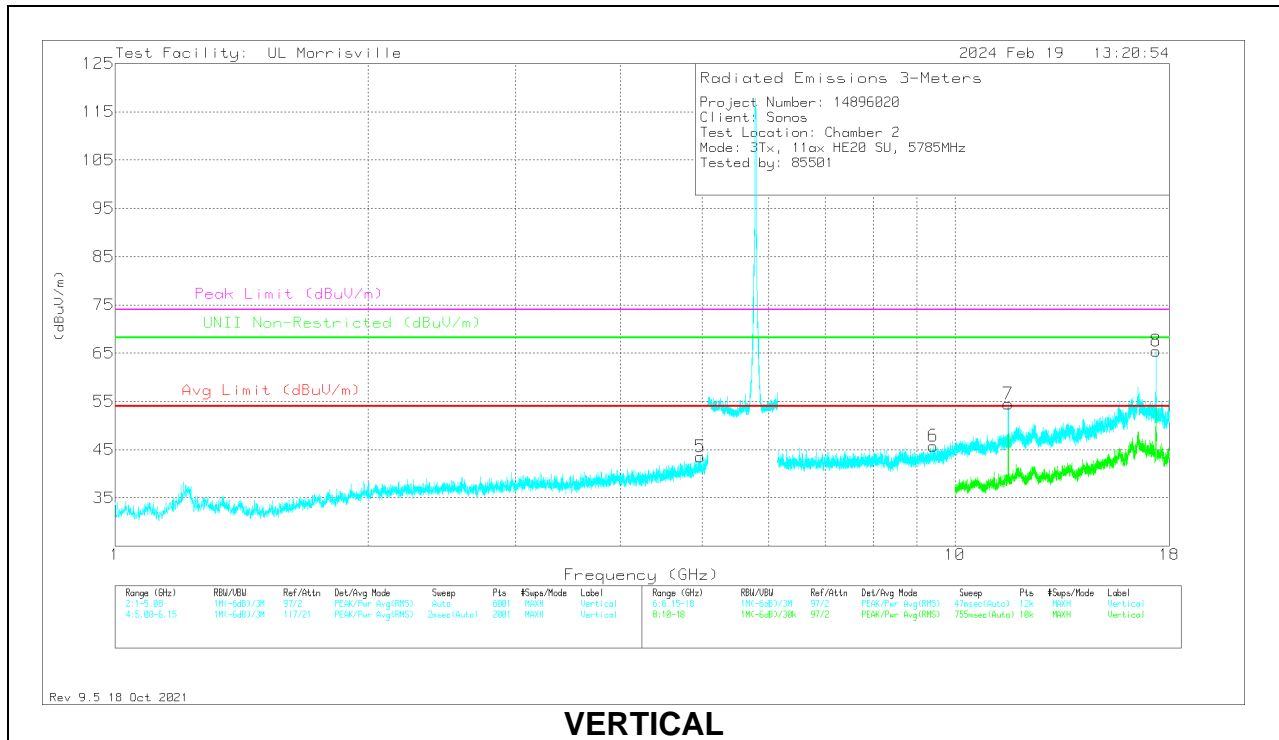

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	86408 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.75088	39.89	Pk	34.2	-30.4	43.69	54	-10.31	74	-30.31	-	-	0-360	101	H
5	*** 4.97664	38.45	Pk	34	-28.9	43.55	54	-10.45	74	-30.45	-	-	0-360	200	V
2	*** 9.39986	35.39	Pk	36.2	-25.8	45.79	54	-8.21	74	-28.21	-	-	0-360	101	H
3	*** 11.56717	40.63	PK-U	38.2	-24.1	54.73	-	-	74	-19.27	-	-	49	104	H
	*** 11.57171	29.48	ADR	38.2	-23.9	43.78	54	-10.22	-	-	-	-	49	104	H
6	*** 9.41961	35.26	Pk	36.2	-25.7	45.76	54	-8.24	74	-28.24	-	-	0-360	200	V
7	*** 11.57196	42.2	PK-U	38.2	-23.9	56.5	-	-	74	-17.5	-	-	62	318	V
	*** 11.57191	31.88	ADR	38.2	-23.9	46.18	54	-7.82	-	-	-	-	62	318	V
8	17.35379	45.57	PK-U	41	-21.2	65.37	-	-	74	-8.63	68.2	-2.83	356	186	V
4	17.35624	38.85	PK-U	41	-21.1	58.75	-	-	74	-15.25	68.2	-9.45	60	246	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 PK-U - Maximum Peak
 ADR - RMS average

10.1.27. TX ABOVE 1 GHz 802.11ax HE40 MODE IN THE 5.8 GHz BAND

3TX CDD MODE – SU

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

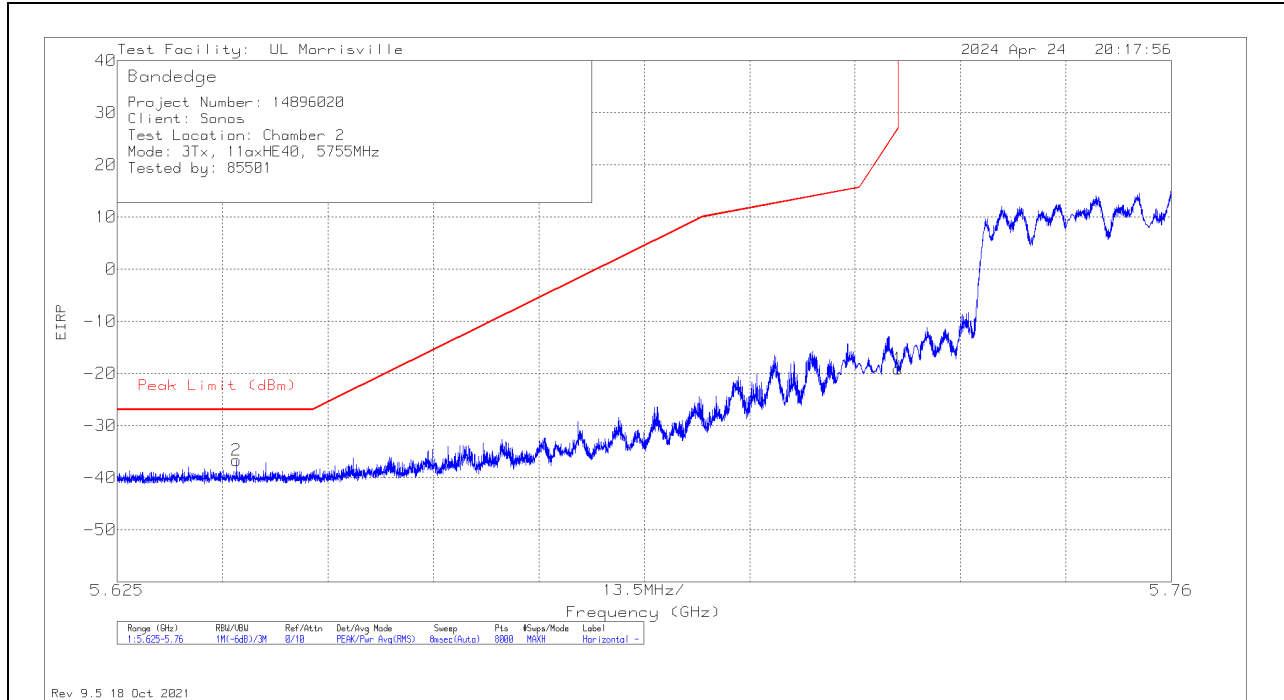

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64024	-70.18	Pk	34.6	-22.9	11.8	10	0	-36.68	-27	-9.68	143	354	H
1	5.725	-52.53	Pk	34.6	-23	11.8	10	0	-19.13	26.99	-46.12	143	354	H

Pk - Peak detector

VERTICAL RESULT

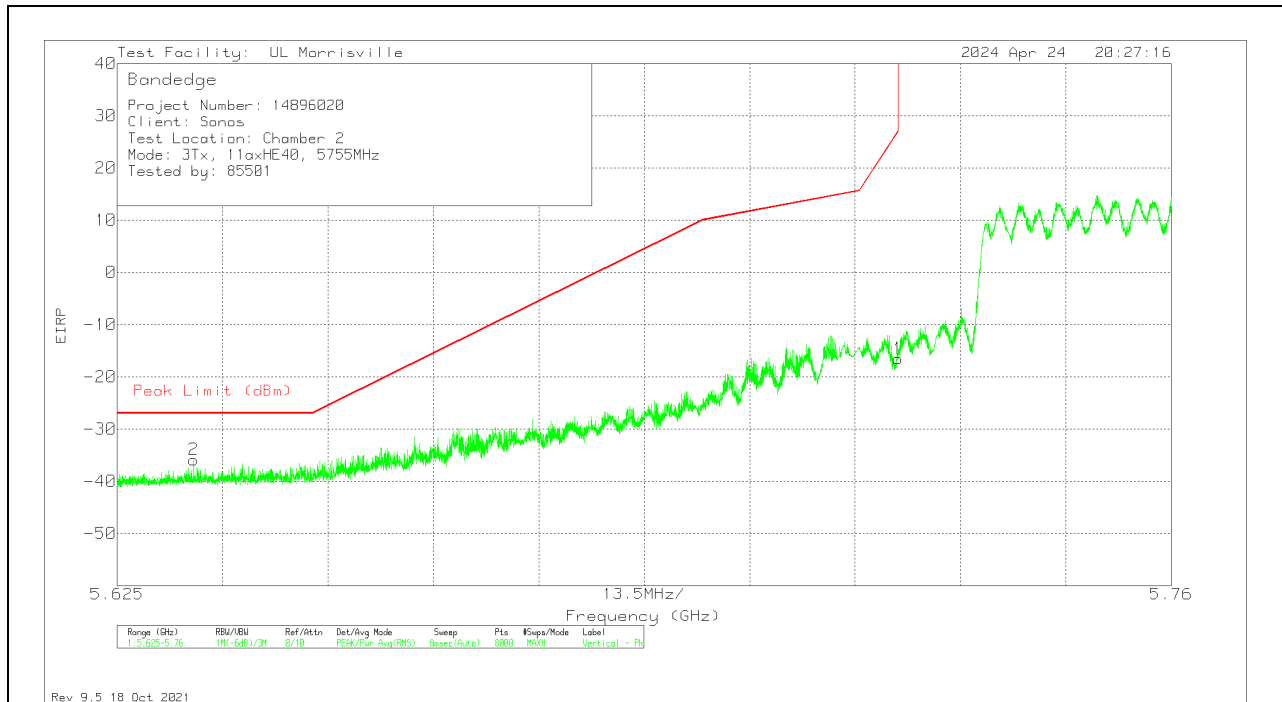


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63477	-69.46	Pk	34.6	-22.8	11.8	10	0	-35.86	-27	-8.86	17	355	V
1	5.725	-49.91	Pk	34.6	-23	11.8	10	0	-16.51	26.99	-43.5	17	355	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

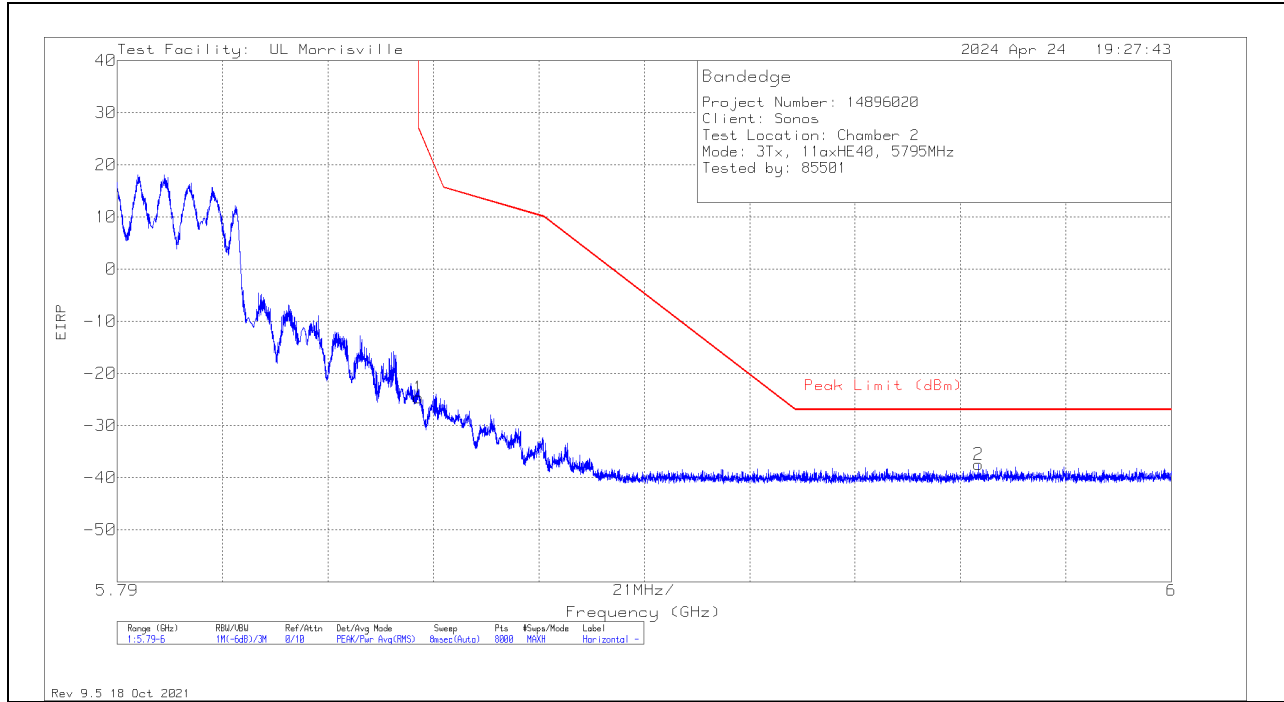

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-58.44	Pk	34.9	-22.9	11.8	10	0	-24.64	26.97	-51.61	145	287	H
2	5.96156	-71.97	Pk	35.1	-22.4	11.8	10	0	-37.47	-27	-10.47	145	287	H

Pk - Peak detector

VERTICAL RESULT

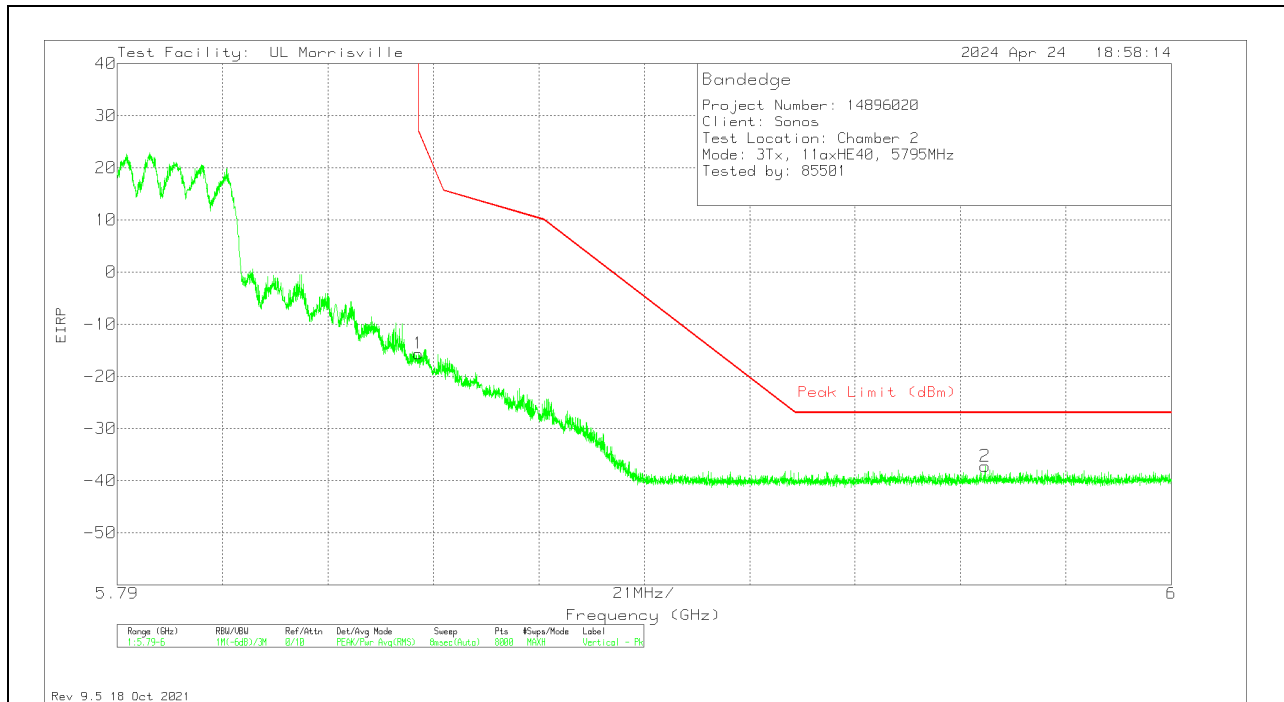


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-49.43	Pk	34.9	-22.9	11.8	10	0	-15.63	26.97	-42.6	141	123	V
2	5.9629	-71.72	Pk	35.1	-22.4	11.8	10	0	-37.22	-27	-10.22	141	123	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

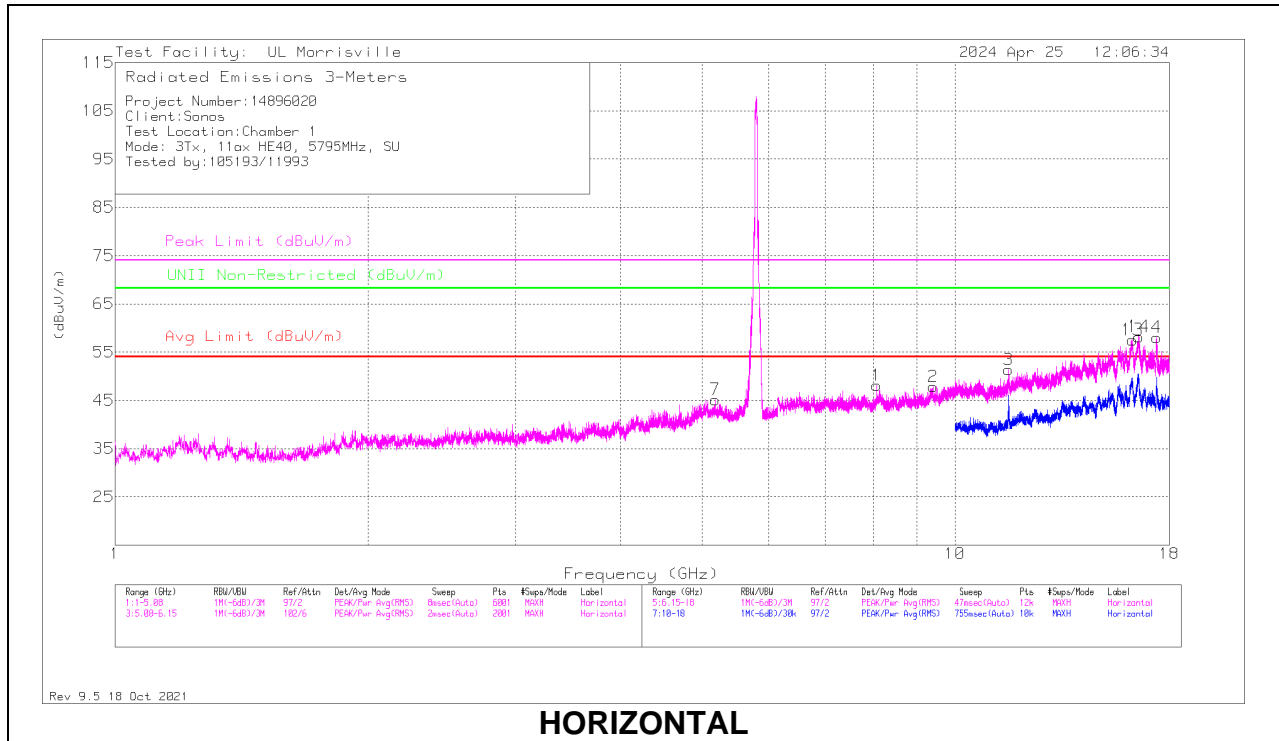

HORIZONTAL

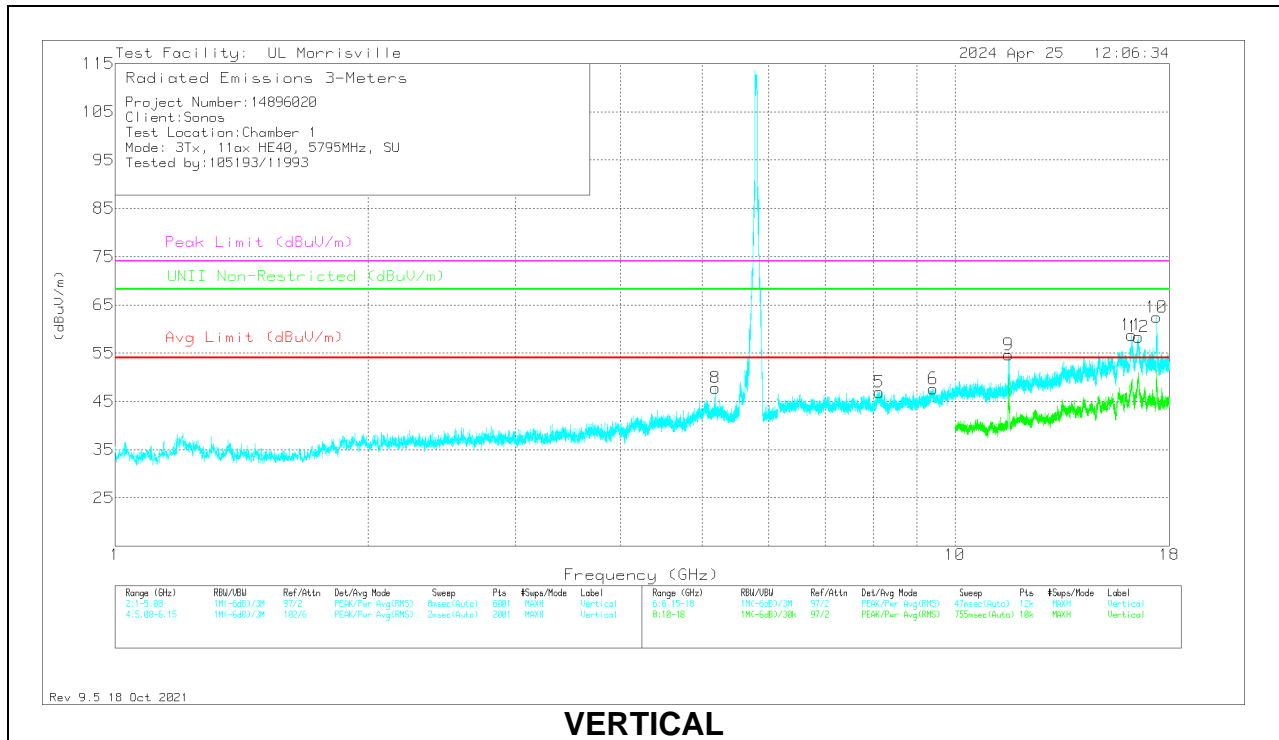

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	135143 (dB/m)	Gain/Loss (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
7	** 5.18165	32.73	Pk	34.3	-21.9	0	45.13	-	-	-	-	68.2	-23.07	0-360	200	H
8	** 5.18379	35.39	Pk	34.3	-21.9	0	47.79	-	-	-	-	68.2	-20.41	0-360	101	V
1	*** 8.06269	37.98	PK-U	35.9	-26.8	0	47.08	-	-	74	-26.92	-	-	40	176	H
	*** 8.06101	26.82	ADR	35.9	-26.8	.12	36.04	54	-17.96	-	-	-	-	40	176	H
2	*** 9.4206	37.23	Pk	36.3	-25.7	0	47.83	54	-6.17	74	-26.17	-	-	0-360	199	H
3	*** 11.5865	42.97	PK-U	38.1	-23.9	0	57.17	-	-	74	-16.83	-	-	5	102	H
	*** 11.58699	31.47	ADR	38.1	-23.9	.12	45.79	54	-8.21	-	-	-	-	5	102	H
5	*** 8.12895	37.7	Pk	35.9	-26.7	0	46.9	54	-7.1	74	-27.1	-	-	0-360	101	V
6	*** 9.41468	36.9	Pk	36.3	-25.6	0	47.6	54	-6.4	74	-26.4	-	-	0-360	101	V
9	*** 11.58633	44.72	PK-U	38.1	-23.9	0	58.92	-	-	74	-15.08	-	-	299	216	V
	*** 11.58652	33.49	ADR	38.1	-23.9	.12	47.81	54	-6.19	-	-	-	-	299	216	V
11	16.23238	36.95	Pk	40.1	-18.3	0	58.75	-	-	-	-	68.2	-9.45	0-360	200	V
13	16.27089	35.61	Pk	40.1	-18.2	0	57.51	-	-	-	-	68.2	-10.69	0-360	101	H
12	16.53751	35.56	Pk	40.4	-17.6	0	58.36	-	-	-	-	68.2	-9.84	0-360	200	V
14	16.55825	36.17	Pk	40.5	-18.5	0	58.17	-	-	-	-	68.2	-10.03	0-360	101	H
4	17.38281	38.25	Pk	41.2	-21.4	0	58.05	-	-	-	-	68.2	-10.15	0-360	101	H
10	17.38768	44.46	PK-U	41.2	-21.4	0	64.26	-	-	-	-	68.2	-3.94	270	112	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 PK-U - Maximum Peak
 ADR - RMS average

10.1.28. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE 5.8 GHz BAND

3TX CDD MODE – SU

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

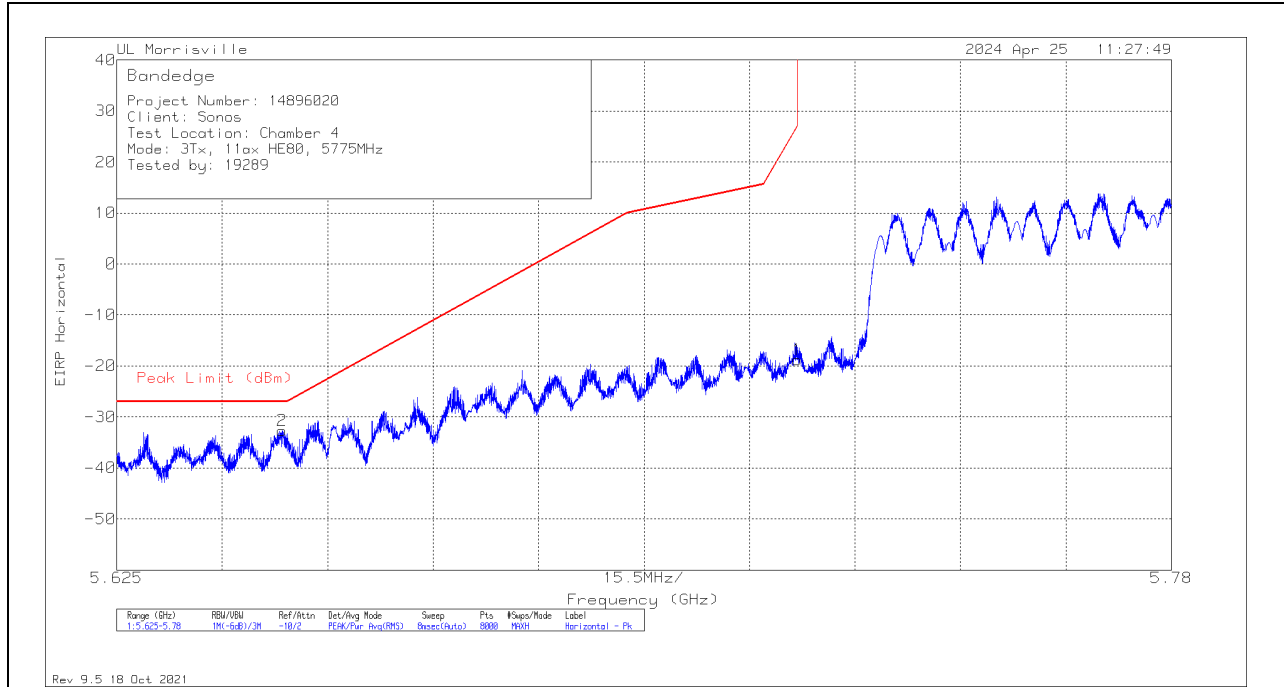

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64932	-70.7	Pk	34.7	-8.5	11.8	-32.7	-27	-5.7	140	251	H
1	5.72499	-56.59	Pk	34.7	-8.7	11.8	-18.79	26.97	-45.76	140	251	H

Pk - Peak detector

VERTICAL RESULT

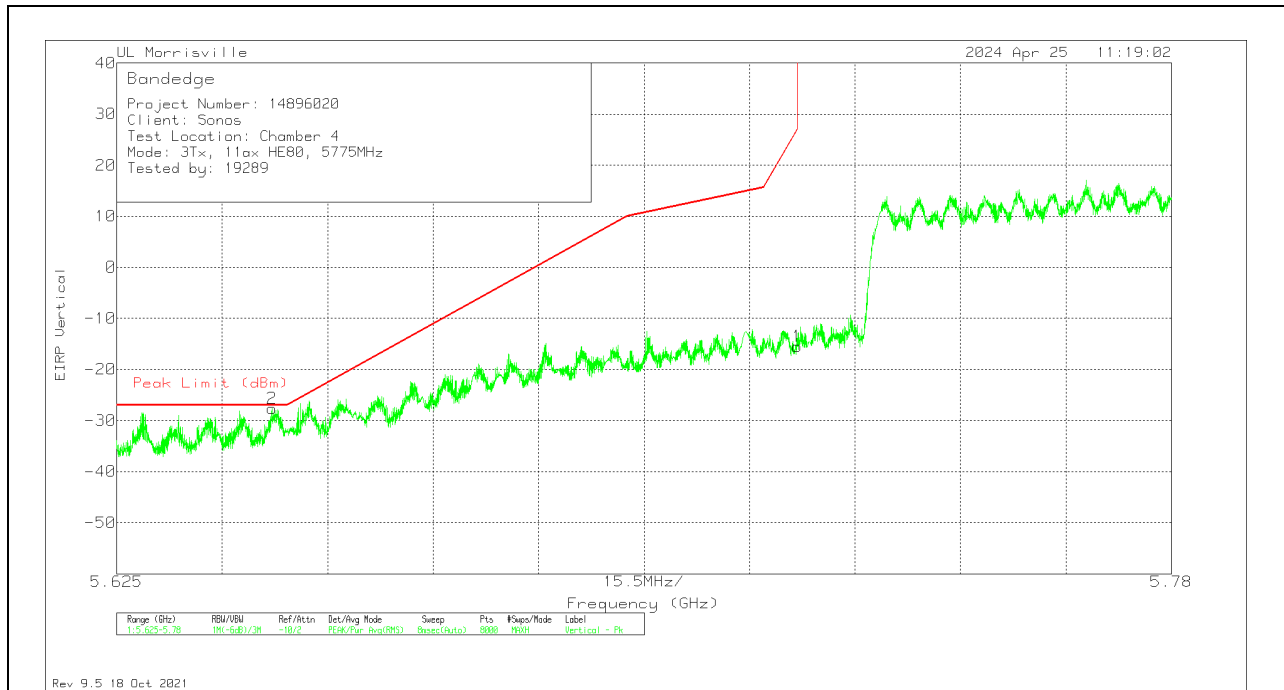


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64779	-65.57	Pk	34.7	-8.6	11.8	-27.67	-27	-.67	50	100	V
1	5.72499	-53.31	Pk	34.7	-8.7	11.8	-15.51	26.97	-42.48	50	100	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

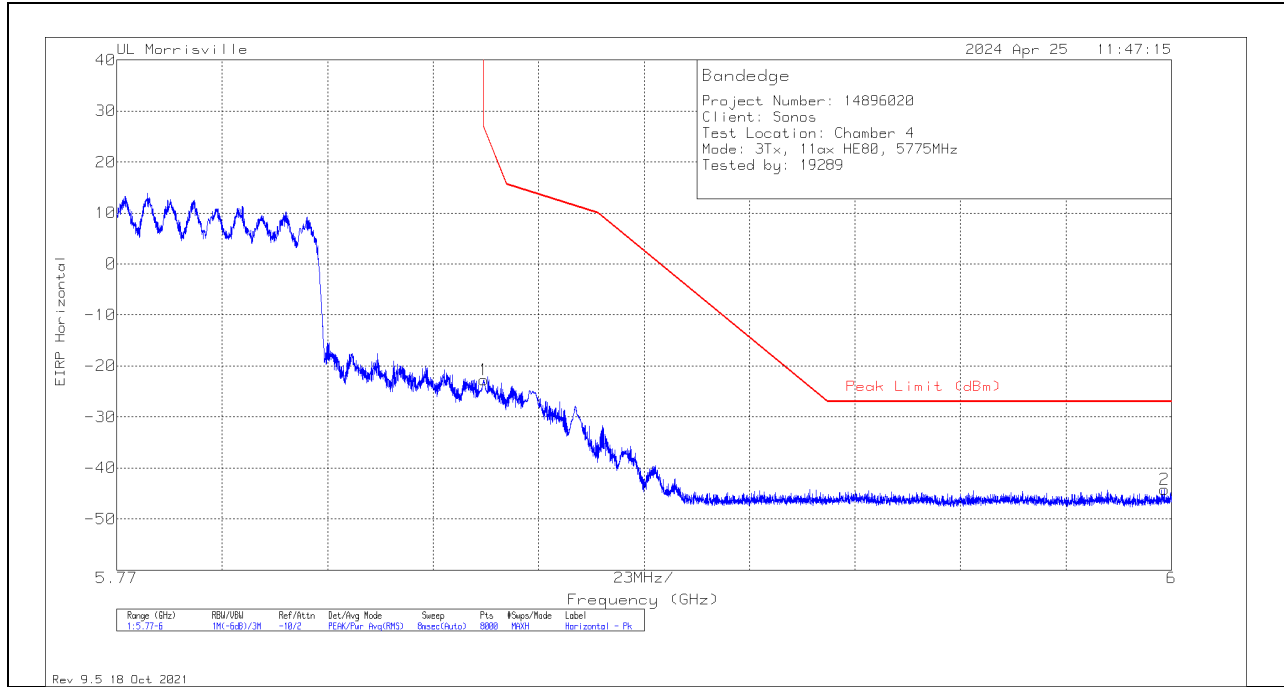

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-60.97	Pk	34.8	-8.4	11.8	-22.77	26.95	-49.72	17	204	H
2	5.99848	-82.79	Pk	35	-8.2	11.8	-44.19	-27	-17.19	17	204	H

Pk - Peak detector

VERTICAL RESULT

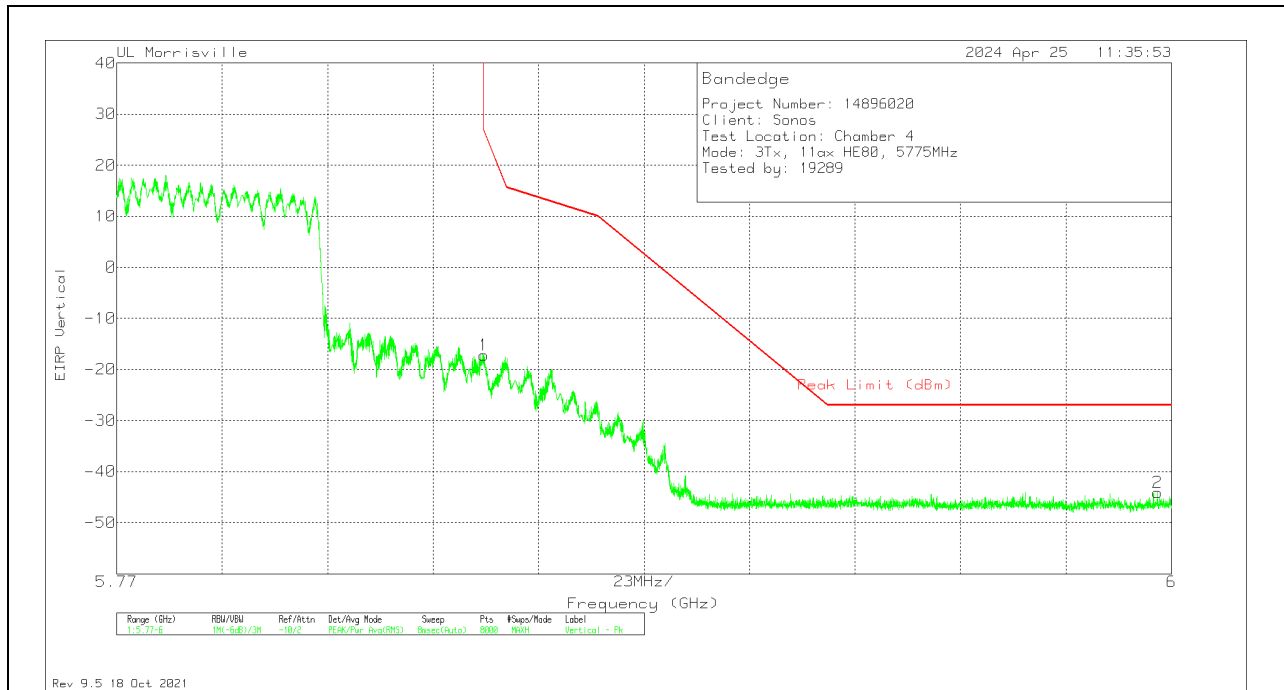


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-55.38	Pk	34.8	-8.4	11.8	-17.18	26.95	-44.13	49	214	V
2	5.99696	-82.56	Pk	35	-8.3	11.8	-44.06	-27	-17.06	49	214	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

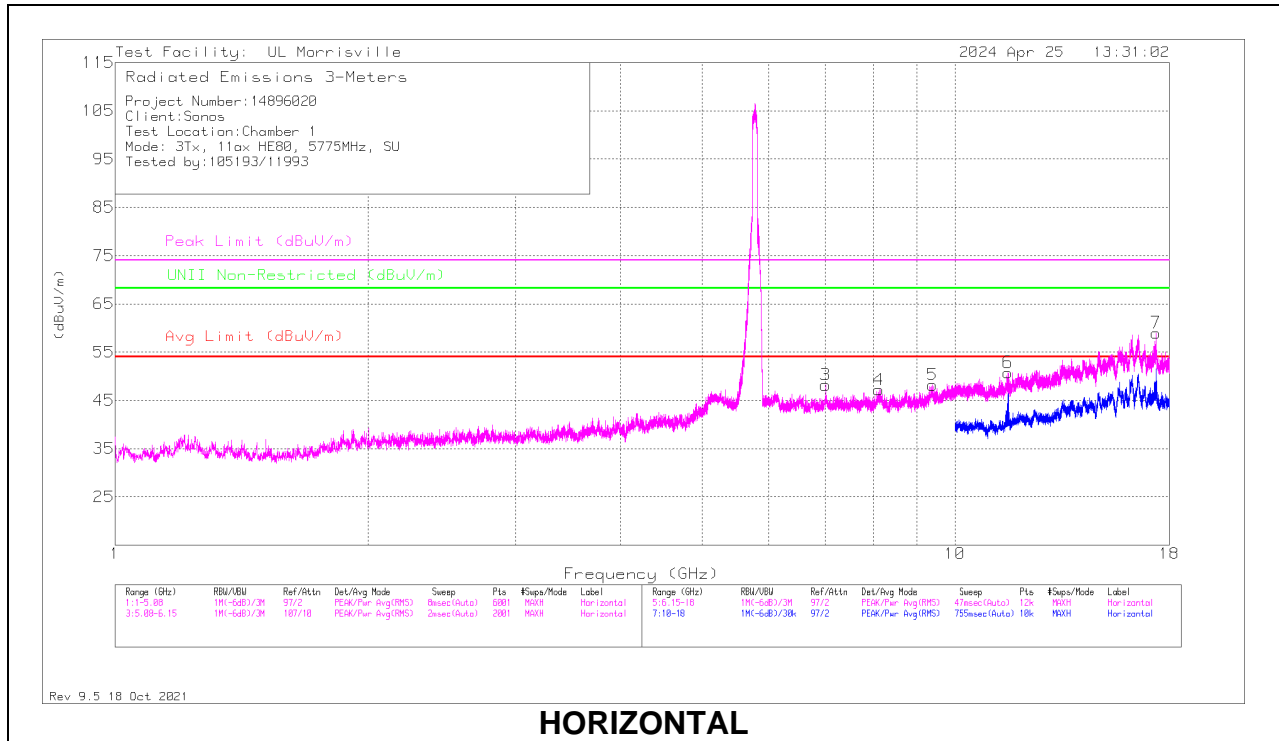

HORIZONTAL

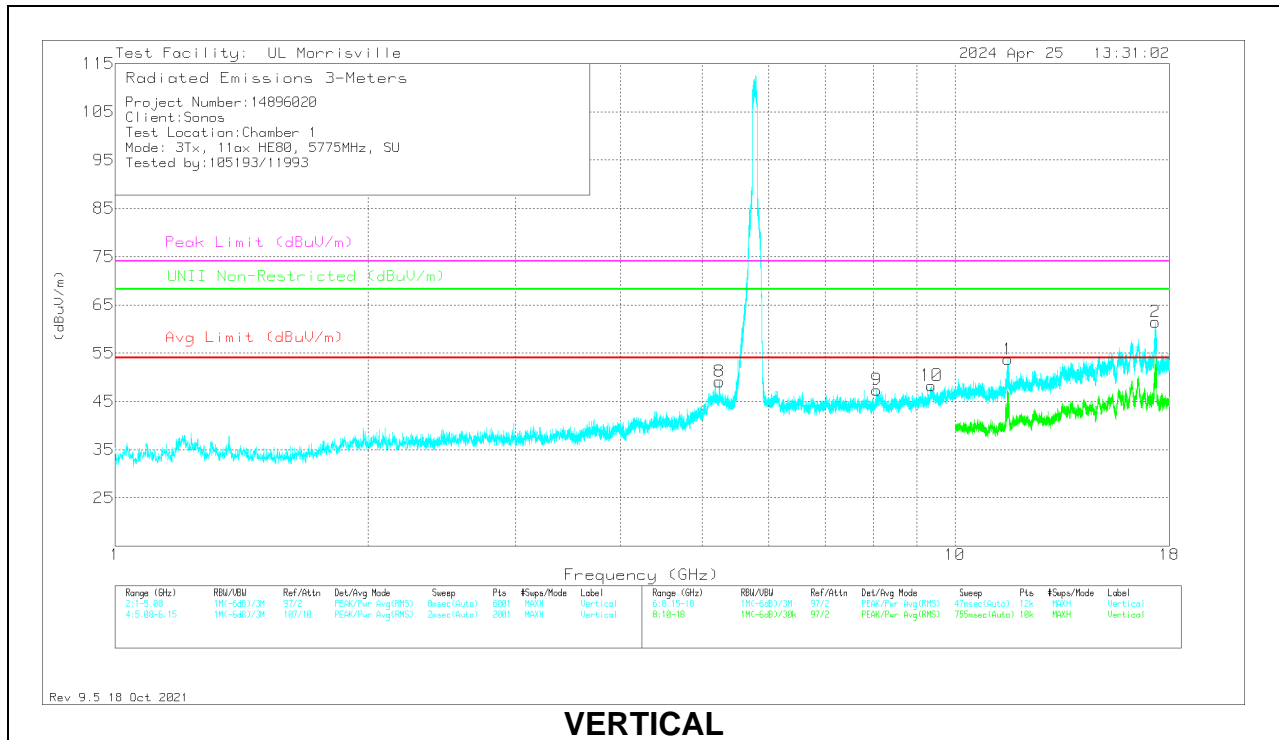

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	135143 (dB/m)	Gain/Loss (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
8	** 5.24149	36.65	PK-U	34.3	-22.1	0	48.85	-	-	-	-	68.2	-19.35	122	112	V
	** 5.2422	23.7	ADR	34.3	-22.1	.25	36.15	-	-	-	-	-	-	122	112	V
4	*** 8.11809	38.38	Pk	35.9	-27.1	0	47.18	54	-6.82	74	-26.82	-	-	0-360	101	H
5	*** 9.4095	38.66	PK-U	36.3	-25.5	0	49.46	-	-	74	-24.54	-	-	93	267	H
	*** 9.40741	27.47	ADR	36.3	-25.5	.25	38.52	54	-15.48	-	-	-	-	93	267	H
6	*** 11.56709	39.8	PK-U	38.1	-24.1	0	53.8	-	-	74	-20.2	-	-	340	223	H
	*** 11.56742	27.46	ADR	38.1	-24.1	.25	41.71	54	-12.29	-	-	-	-	340	223	H
1	*** 11.56711	43.69	PK-U	38.1	-24.1	0	57.69	-	-	74	-16.31	-	-	299	207	V
	*** 11.56657	31.17	ADR	38	-24.1	.25	45.32	54	-8.68	-	-	-	-	299	207	V
9	*** 8.06575	38.29	Pk	35.9	-26.8	0	47.39	54	-6.61	74	-26.61	-	-	0-360	101	V
10	*** 9.37688	38.8	PK-U	36.2	-25.7	0	49.3	-	-	74	-24.7	-	-	17	305	V
	*** 9.37853	27.43	ADR	36.2	-25.7	.25	38.18	54	-15.82	-	-	-	-	17	305	V
3	7.01209	40.09	Pk	35.4	-27.3	0	48.19	-	-	-	-	68.2	-20.01	0-360	199	H
2	17.33541	41.98	Pk	41.2	-21.7	0	61.48	-	-	-	-	68.2	-6.72	0-360	101	V
7	17.36306	38.64	Pk	41.2	-20.9	0	58.94	-	-	-	-	68.2	-9.26	0-360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 PK-U - Maximum Peak
 ADR - RMS average

10.2. TRANSMITTER WORST CASE

10.2.1. SPURIOUS BELOW 30MHz


Note: All measurements were made at a test distance of 3 m. The measured data was extrapolated from the test distance (3m) to the specification distance (300 m from 9-490 kHz and 30 m from 490 kHz – 30 MHz) to clearly show the relative levels of fundamental and spurious emissions and demonstrate compliance with the requirement that the level of any spurious emissions be below the level of the intentionally transmitted signal. The extrapolation factor for the limits were 40*Log (test distance / specification distance).

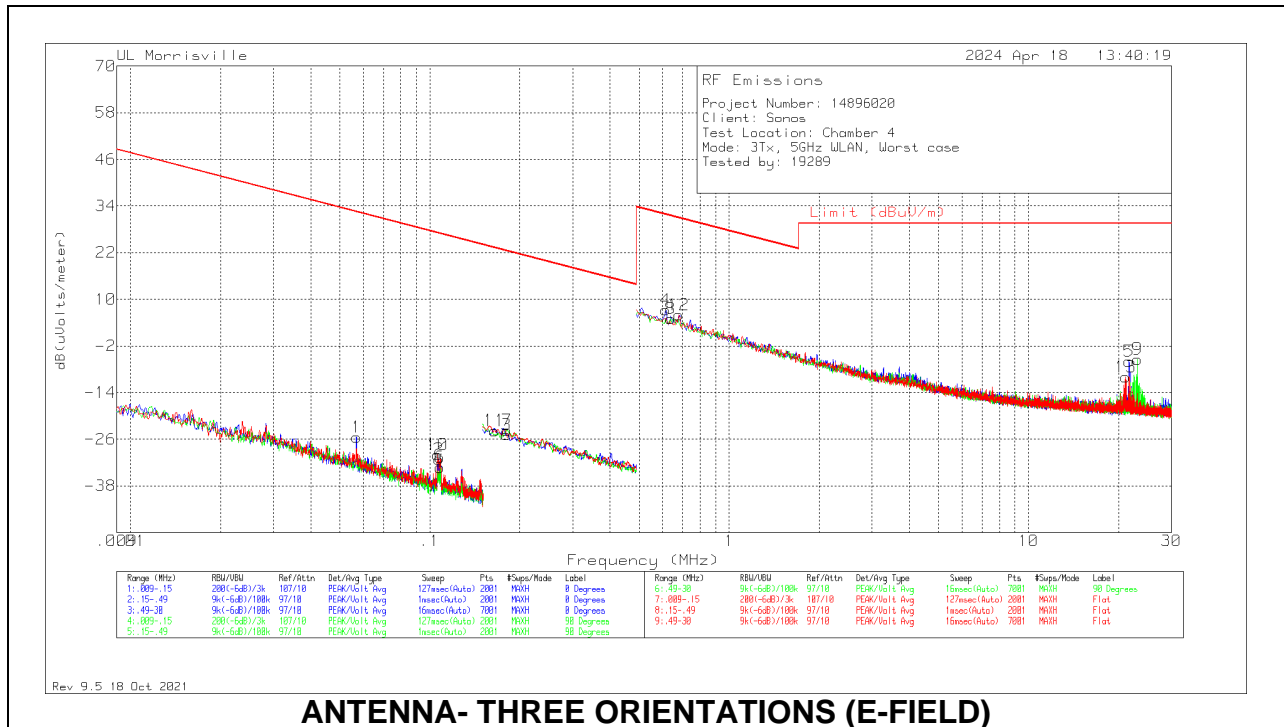

ANTENNA- THREE ORIENTATIONS (E-FIELD)

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	135144 (dBuV/m)	Gain/Loss (dB)	Dist. Corr. Factor (dB)	Corrected Reading dB(uVolts/meter)	QP/AV Limit (dBuV/m)	PK Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Loop Angle
1	.05685	42.95	Pk	11.6	0	-80	-25.45	32.51	52.51	-57.96	0-360	0 degs
10	.10613	38.85	Pk	11.1	0	-80	-30.05	27.09	-	-57.14	0-360	Flat
2	.10691	37.8	Pk	11.1	0	-80	-31.1	27.02	-	-58.12	0-360	0 degs
6	.10812	35.63	Pk	11.1	0	-80	-33.27	26.93	-	-60.2	0-360	90 degs
11	.16437	45.12	Pk	11.1	0	-80	-23.78	23.29	43.29	-47.07	0-360	Flat
3	.18052	44.13	Pk	11.1	0	-80	-24.77	22.47	42.47	-47.24	0-360	0 degs
7	.1812	45.13	Pk	11.1	0	-80	-23.77	22.44	42.44	-46.21	0-360	90 degs
4	.61226	35.97	Pk	11.2	.1	-40	7.27	31.87	-	-24.6	0-360	0 degs
8	.63756	33.76	Pk	11.2	.1	-40	5.06	31.51	-	-26.45	0-360	90 degs
12	.67972	34.74	Pk	11.2	.1	-40	6.04	30.96	-	-24.92	0-360	Flat
13	21.05143	19.47	Pk	10	.6	-40	-9.93	29.54	-	-39.47	0-360	Flat
5	21.66275	23.45	Pk	10	.6	-40	-5.95	29.54	-	-35.49	0-360	0 degs
9	23.12992	24.31	Pk	9.7	.6	-40	-5.39	29.54	-	-34.93	0-360	90 degs

Pk - Peak detector


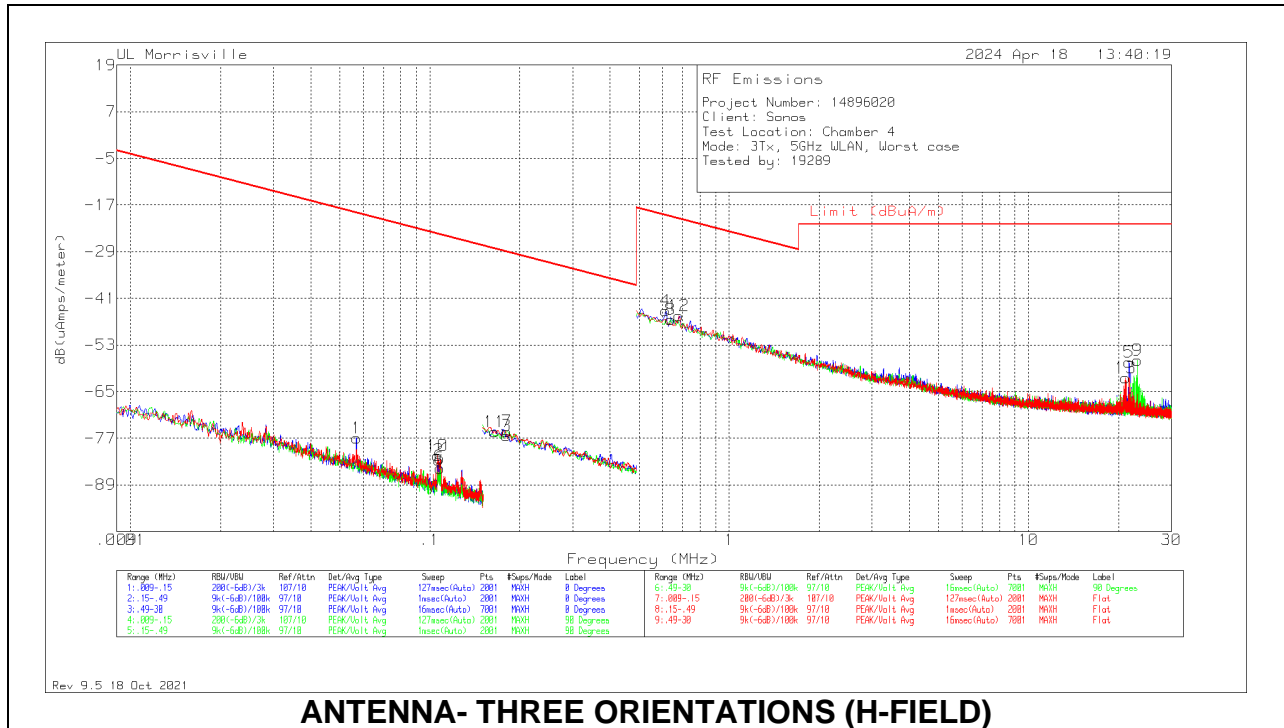


ANTENNA- THREE ORIENTATIONS (H-FIELD)

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	135144 (dBuV/m)	Gain/Loss (dB)	Dist. Corr. Factor (dB)	Corrected Reading dB(uAmps/meter)	QP/AV Limit (dBuA/m)	PK Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Loop Angle
1	.05685	42.95	Pk	-39.9	0	-80	-76.95	-18.99	1.01	-57.96	0-360	100	0 degs
10	.10613	38.85	Pk	-40.4	0	-80	-81.55	-24.41	-	-57.14	0-360	100	Flat
2	.10691	37.8	Pk	-40.4	0	-80	-82.6	-24.48	-	-58.12	0-360	100	0 degs
6	.10812	35.63	Pk	-40.4	0	-80	-84.77	-24.57	-	-60.2	0-360	100	90 degs
11	.16437	45.12	Pk	-40.4	0	-80	-75.28	-28.21	-8.21	-47.07	0-360	100	Flat
3	.18052	44.13	Pk	-40.4	0	-80	-76.27	-29.03	-9.03	-47.24	0-360	100	0 degs
7	.1812	45.13	Pk	-40.4	0	-80	-75.27	-29.06	-9.06	-46.21	0-360	100	90 degs
4	.61226	35.97	Pk	-40.3	.1	-40	-44.23	-19.63	-	-24.6	0-360	100	0 degs
8	.63756	33.76	Pk	-40.3	.1	-40	-46.44	-19.99	-	-26.45	0-360	100	90 degs
12	.67972	34.74	Pk	-40.3	.1	-40	-45.46	-20.54	-	-24.92	0-360	100	Flat
13	21.05143	19.47	Pk	-41.5	.6	-40	-61.43	-21.96	-	-39.47	0-360	100	Flat
5	21.66275	23.45	Pk	-41.5	.6	-40	-57.45	-21.96	-	-35.49	0-360	100	0 degs
9	23.12992	24.31	Pk	-41.8	.6	-40	-56.89	-21.96	-	-34.93	0-360	100	90 degs

Pk - Peak detector

10.2.2. SPURIOUS 30-1000MHz

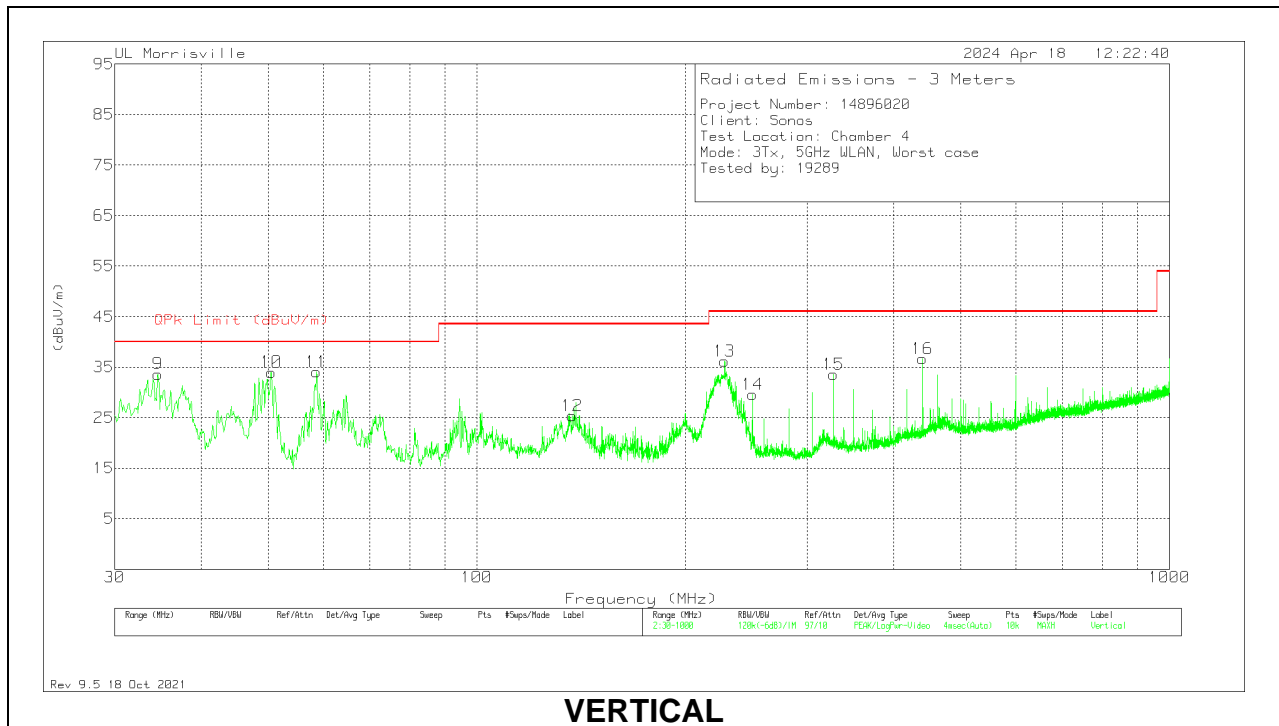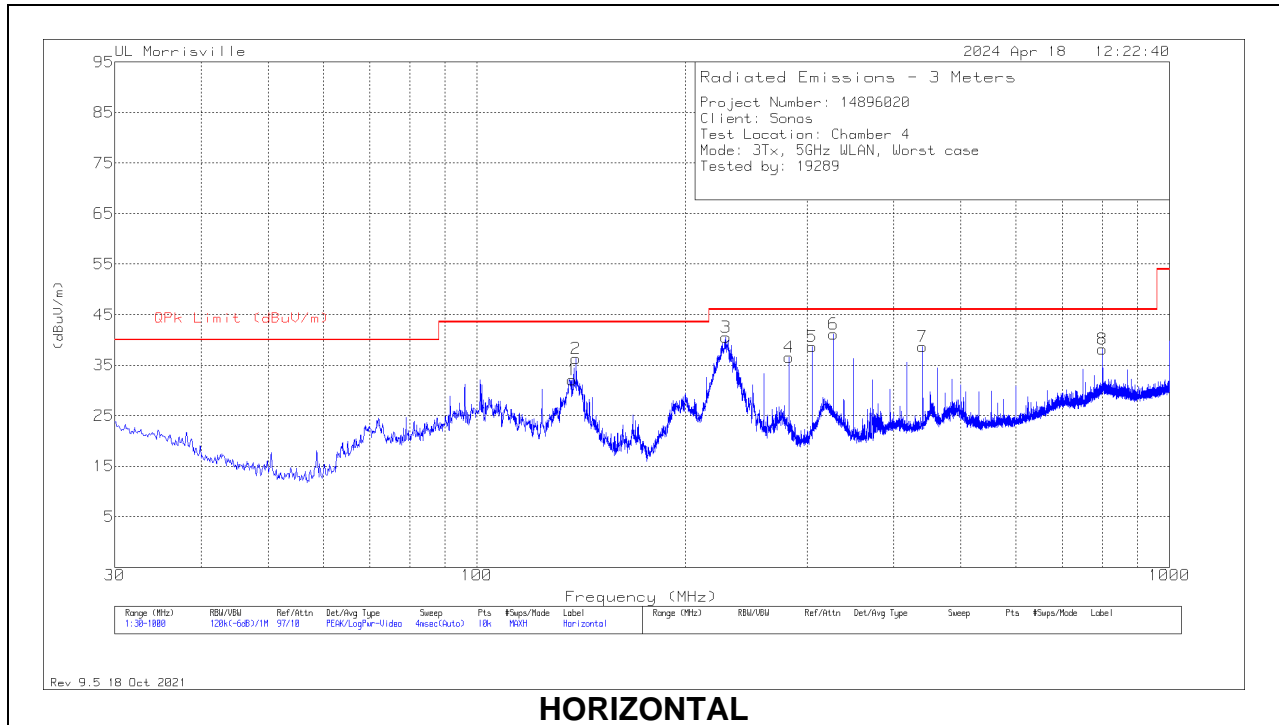

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	90628 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 137.185	43.74	Pk	19.5	-31.2	32.04	43.52	-11.48	0-360	100	H
4	** * 282.2	47.44	Pk	19.5	-30.4	36.54	46.02	-9.48	0-360	100	H
6	* ** 327.3914	51.01	Qp	20.1	-30.2	40.91	46.02	-5.11	97	102	H
8	** 799.986	39.24	Pk	27.2	-28.3	38.14	46.02	-7.88	0-360	100	H
12	* ** 137.185	37.11	Pk	19.5	-31.2	25.41	43.52	-18.11	0-360	100	V
14	* ** 249.996	42.64	Pk	17.5	-30.5	29.64	46.02	-16.38	0-360	100	V
15	* ** 327.402	43.73	Pk	20.1	-30.2	33.63	46.02	-12.39	0-360	200	V
9	34.656	41.94	Pk	23.8	-32.1	33.64	-	-	0-360	100	V
10	50.467	51.91	Pk	14	-31.9	34.01	-	-	0-360	100	V
11	58.712	52.21	Pk	13.7	-31.8	34.11	-	-	0-360	100	V
2	139.028	48.19	Pk	19.3	-31.2	36.29	-	-	0-360	100	H
13	227.977	49.88	Pk	17	-30.7	36.18	-	-	0-360	100	V
3	228.947	54.26	Pk	17	-30.7	40.56	-	-	0-360	100	H
5	304.801	49.26	Pk	19.7	-30.3	38.66	-	-	0-360	100	H
7	440.31	45.72	Pk	22.7	-29.8	38.62	-	-	0-360	100	H
16	440.31	43.8	Pk	22.7	-29.8	36.7	-	-	0-360	100	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

Qp - Quasi-Peak detector



10.2.3. SPURIOUS 18-26 GHz

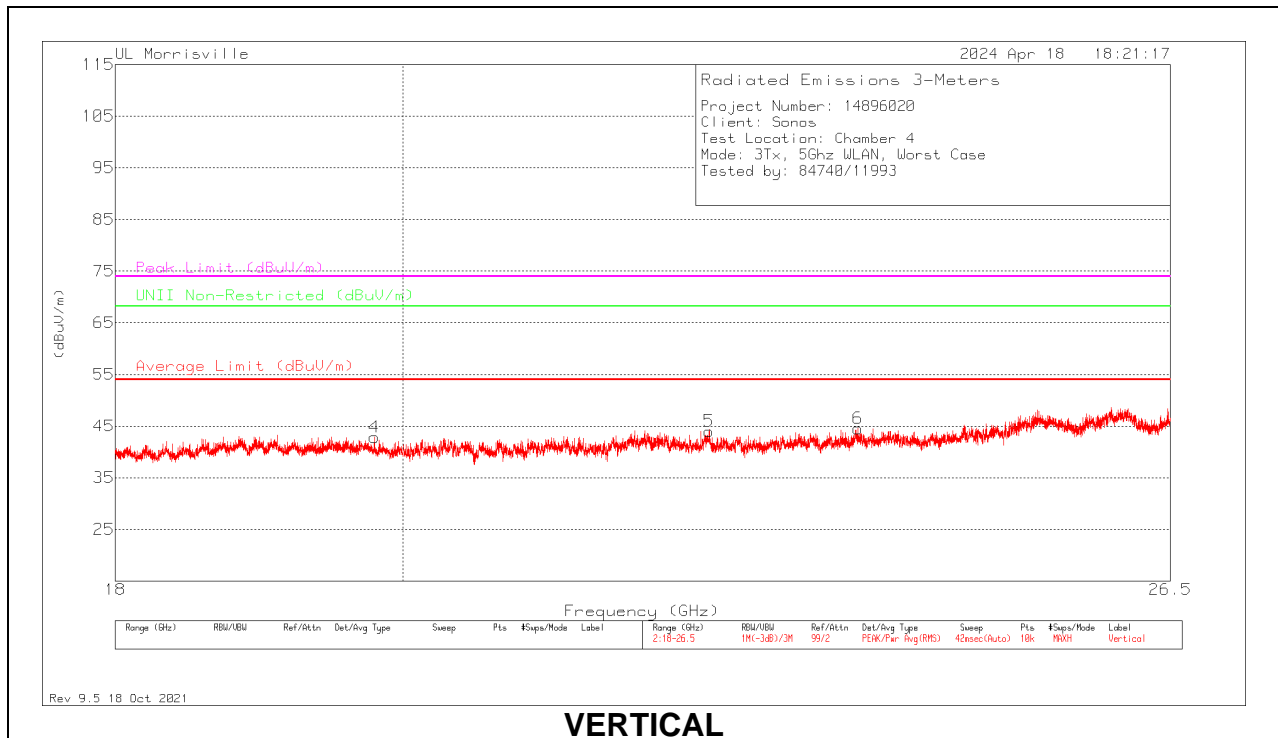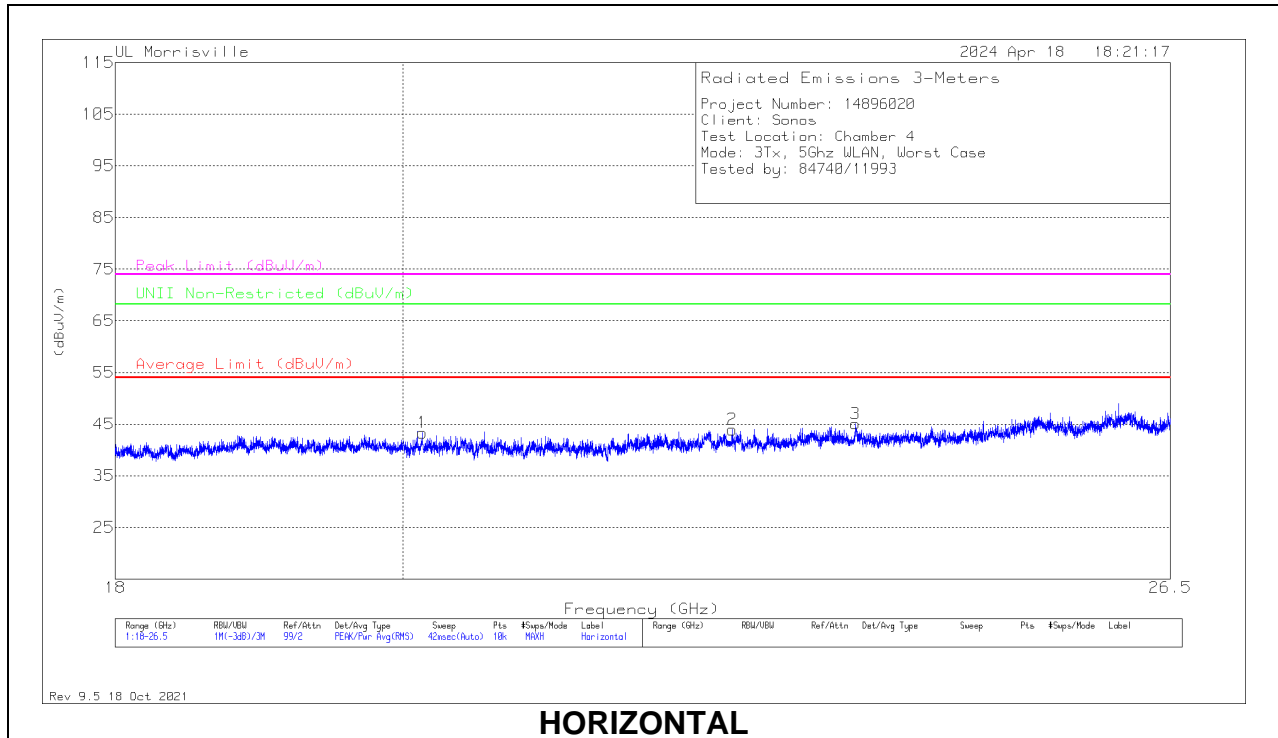

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	204704 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 20.14434	48.63	Pk	33.5	-38.8	43.33	54	-10.67	74	-30.67	-	-	0-360	100	H
2	* ** 22.56829	48.04	Pk	34.3	-38.4	43.94	54	-10.06	74	-30.06	-	-	0-360	100	H
3	* ** 23.61284	46.67	Pk	34.6	-36.2	45.07	54	-8.93	74	-28.93	-	-	0-360	150	H
4	* ** 19.79417	49.34	Pk	33.2	-39.7	42.84	54	-11.16	74	-31.16	-	-	0-360	300	V
5	* ** 22.37791	47.51	Pk	34.1	-37.6	44.01	54	-9.99	74	-29.99	-	-	0-360	300	V
6	* ** 23.63409	47.24	Pk	34.6	-37.3	44.54	54	-9.46	74	-29.46	-	-	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector

10.2.4. SPURIOUS 26-40 GHz

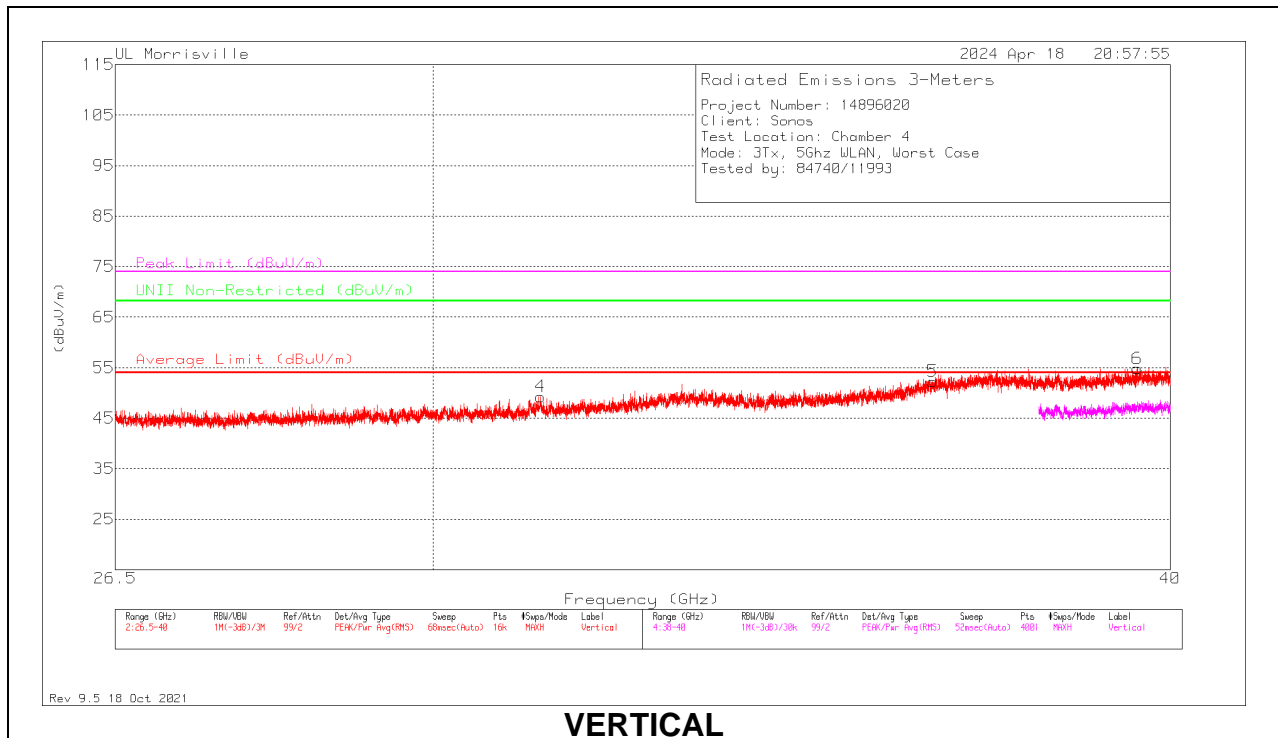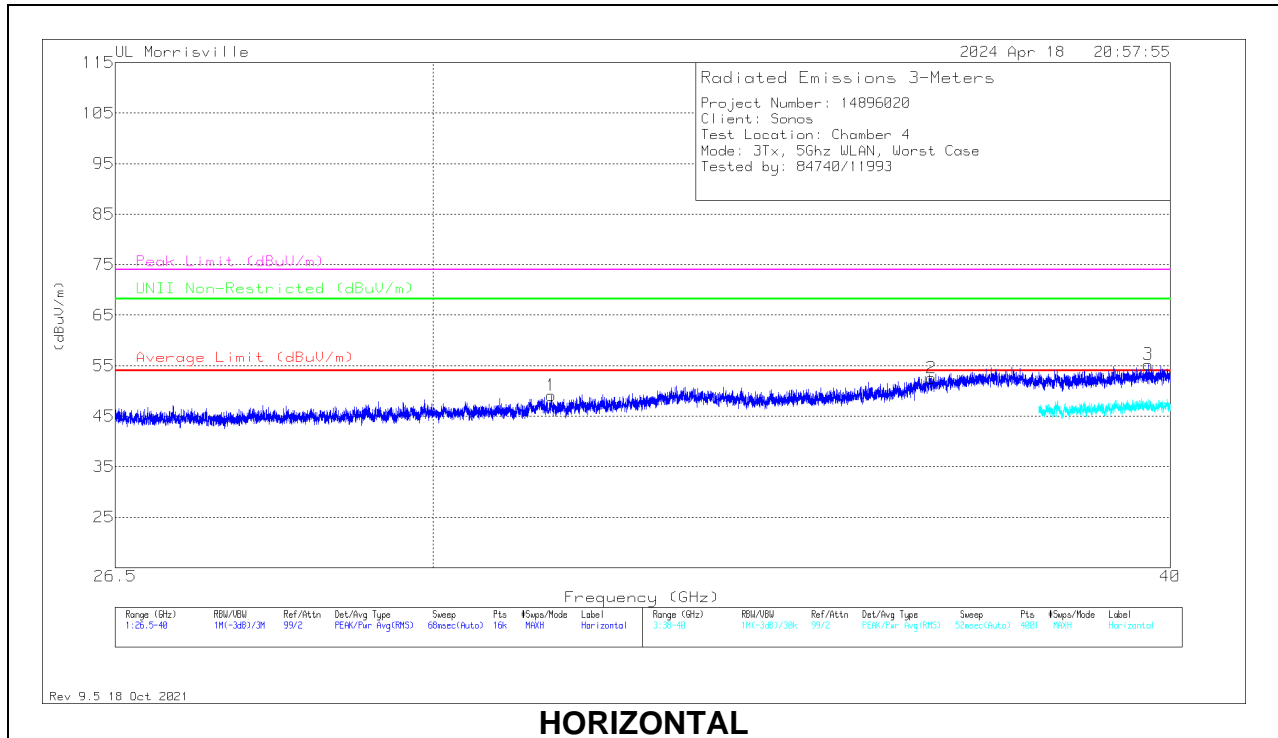

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	204705 (dB/m)	Gain/Loss (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 31.4179	44.99	PK-U	36.8	-31.7	0	50.09	-	-	74	-23.91	-	-	310	101	H
	** 31.4159	32.69	ADR	36.8	-31.4	0	38.09	54	-15.91	74	-35.91	-	-	310	101	H
2	** 36.44379	49.56	PK-U	37.9	-33.7	0	53.76	-	-	74	-20.24	-	-	318	241	H
	*** 36.44171	36.93	ADR	37.9	-33.7	0	41.13	54	-12.87	74	-32.87	-	-	318	241	H
3	*** 39.661	48.01	PK-U	38.5	-30.9	0	55.61	-	-	74	-18.39	-	-	17	106	H
	** 39.6579	35.63	ADR	38.5	-30.6	0	43.53	54	-10.47	74	-30.47	-	-	17	106	H
4	*** 31.28565	45.29	PK-U	37	-31.9	0	50.39	-	-	74	-23.61	-	-	160	103	V
	*** 31.28494	33.13	ADR	37	-31.9	0	38.23	54	-15.77	74	-35.77	-	-	160	103	V
5	*** 36.46086	49.34	PK-U	37.9	-33.2	0	54.04	-	-	74	-19.96	-	-	330	180	V
	*** 36.46163	37.04	ADR	37.9	-33.2	0	41.74	54	-12.26	74	-32.26	-	-	330	180	V
6	*** 39.48711	49.05	PK-U	38.6	-30.8	0	56.85	-	-	74	-17.15	-	-	267	351	V
	*** 39.48809	35.45	ADR	38.6	-30.7	0	43.35	54	-10.65	74	-30.65	-	-	267	351	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 PK-U Maximum Peak
 ADR - RMS average

11. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)
RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both lines.

RESULTS

11.1. AC POWER LINE NORM

LINE 1 RESULTS

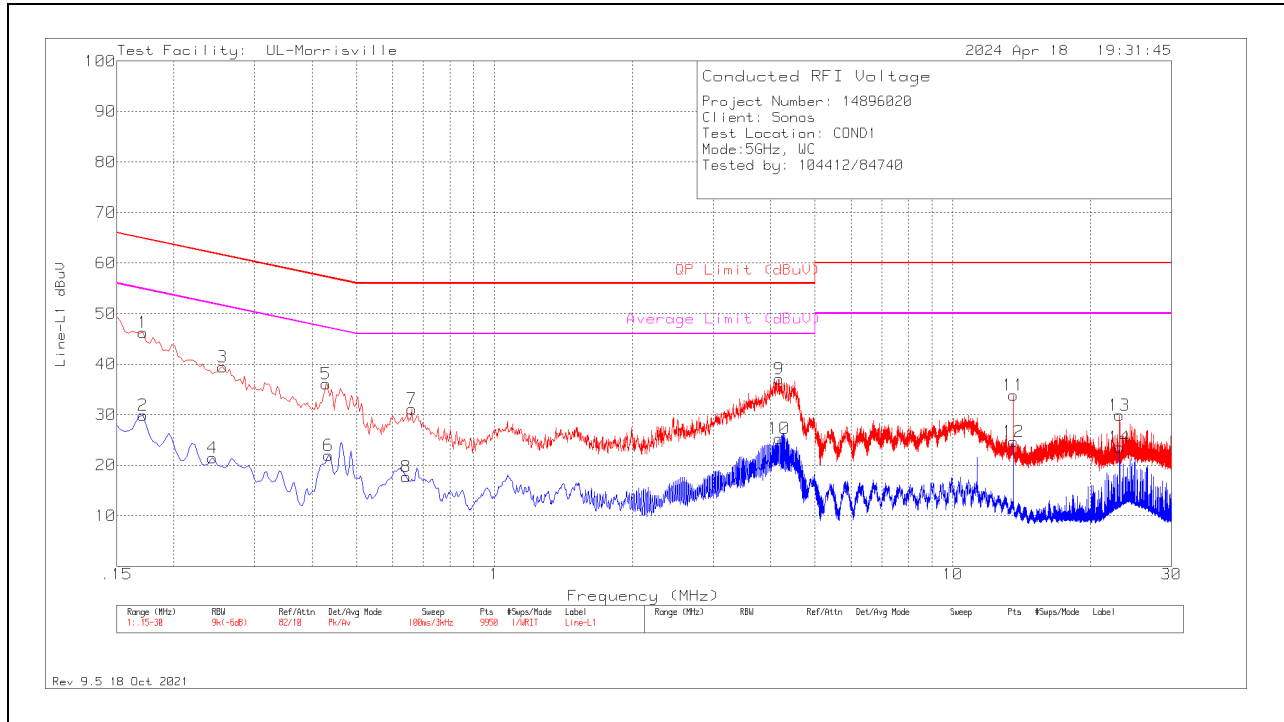


Range 1: Line-L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VDF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
1	.171	36.22	Pk	.3	9.8	46.32	64.91	-18.59	-	-
2	.171	19.74	Av	.3	9.8	29.84	-	-	54.91	-25.07
4	.243	11.46	Av	.2	9.8	21.46	-	-	51.99	-30.53
3	.255	29.49	Pk	.2	9.8	39.49	61.59	-22.1	-	-
5	.429	26.18	Pk	.1	9.8	36.08	57.27	-21.19	-	-
6	.435	12.07	Av	.1	9.8	21.97	-	-	47.16	-25.19
8	.642	7.81	Av	.1	9.8	17.71	-	-	46	-28.29
7	.66	21.22	Pk	.1	9.8	31.12	56	-24.88	-	-
9	4.176	27.14	Pk	.1	9.9	37.14	56	-18.86	-	-
10	4.179	15.26	Av	.1	9.9	25.26	-	-	46	-20.74
12	13.56	14.5	Av	.2	10	24.7	-	-	50	-25.3
11	13.563	23.67	Pk	.2	10	33.87	60	-26.13	-	-
13	23.13	19.36	Pk	.3	10.2	29.86	60	-30.14	-	-
14	23.13	13.06	Av	.3	10.2	23.56	-	-	50	-26.44

Pk - Peak detector
 Av - Average detection

LINE 2 RESULTS

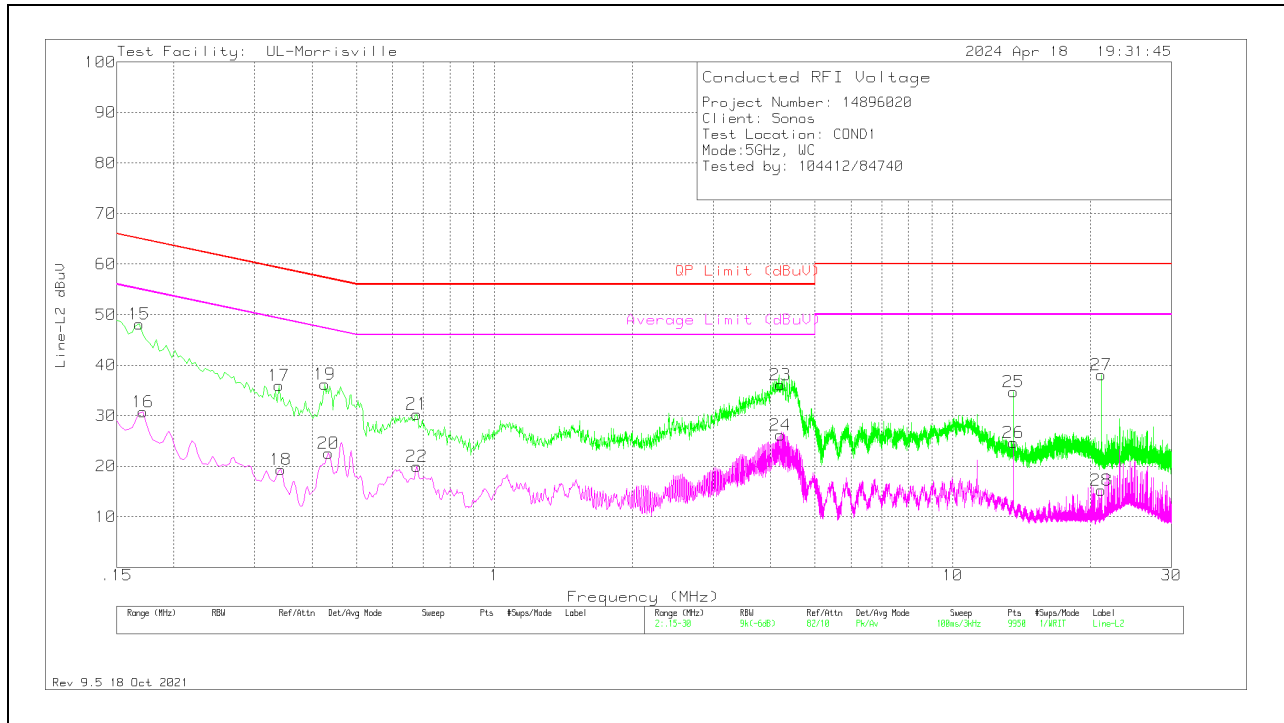

Range 2: Line-L2 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VDF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
15	.168	38.06	Pk	.3	9.8	48.16	65.06	-16.9	-	-
16	.171	20.66	Av	.3	9.8	30.76	-	-	54.91	-24.15
17	.339	26.08	Pk	.1	9.8	35.98	59.23	-23.25	-	-
18	.342	9.42	Av	.1	9.8	19.32	-	-	49.15	-29.83
19	.426	26.36	Pk	.1	9.8	36.26	57.33	-21.07	-	-
20	.435	12.62	Av	.1	9.8	22.52	-	-	47.16	-24.64
21	.678	20.42	Pk	.1	9.8	30.32	56	-25.68	-	-
22	.678	10.08	Av	.1	9.8	19.98	-	-	46	-26.02
24	4.206	16.2	Av	.1	9.9	26.2	-	-	46	-19.8
23	4.209	26.11	Pk	.1	9.9	36.11	56	-19.89	-	-
26	13.56	14.49	Av	.2	10	24.69	-	-	50	-25.31
25	13.563	24.51	Pk	.2	10	34.71	60	-25.29	-	-
27	21.108	27.66	Pk	.2	10.2	38.06	60	-21.94	-	-
28	21.114	4.82	Av	.2	10.2	15.22	-	-	50	-34.78

Pk - Peak detector
 Av - Average detection

12. SETUP PHOTOS

Please refer to R14896020-EP1 for setup photos

END OF TEST REPORT