

**CFR 47 FCC PART 15 SUBPART C**

**TEST REPORT**

*For*

**Headphone**

**MODEL NUMBER: S49**

**REPORT NUMBER: 4791057978-1-RF-1**

**ISSUE DATE: December 29, 2023**

**FCC ID: SBVRM049**

*Prepared for*

**Sonos, Inc.**

**301 COROMAR DR. GOLETA, California 93117 United States**

*Prepared by*

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch**

**Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China**

**Tel: +86 769 22038881**

**Fax: +86 769 33244054**

**Website: [www.ul.com](http://www.ul.com)**

## Revision History

Rev.	Issue Date	Revisions	Revised By
V0	December 29, 2023	Initial Issue	

### Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
Antenna Requirement	N/A	FCC Part 15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	ANSI C63.10-2013, Clause 6.2	FCC Part 15.207	Pass
Conducted Output Power	ANSI C63.10-2013, Clause 11.9.1.3	FCC Part 15.247 (b)(3)	Pass
6dB Bandwidth and 99% Occupied Bandwidth	ANSI C63.10-2013, Clause 11.8.1	FCC Part 15.247 (a)(2)	Pass
Power Spectral Density	ANSI C63.10-2013, Clause 11.10.2	FCC Part 15.247 (e)	Pass
Conducted Band edge and spurious emission	ANSI C63.10-2013, Clause 11.11	FCC Part 15.247(d)	Pass
Radiated Band edge and Spurious Emission	ANSI C63.10-2013, Clause 11.12 & Clause 11.13	FCC Part 15.247 (d) FCC Part 15.205/15.209	Pass
Duty Cycle	ANSI C63.10-2013, Clause 11.6	None; for reporting purposes only.	Pass

\*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

\*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART C > when <Simple Acceptance> decision rule is applied.

## CONTENTS

<b>1.</b>	<b>ATTESTATION OF TEST RESULTS.....</b>	<b>6</b>
<b>2.</b>	<b>TEST METHODOLOGY.....</b>	<b>7</b>
<b>3.</b>	<b>FACILITIES AND ACCREDITATION.....</b>	<b>7</b>
<b>4.</b>	<b>CALIBRATION AND UNCERTAINTY .....</b>	<b>8</b>
4.1.	MEASURING INSTRUMENT CALIBRATION .....	8
4.2.	MEASUREMENT UNCERTAINTY.....	8
<b>5.</b>	<b>EQUIPMENT UNDER TEST .....</b>	<b>9</b>
5.1.	DESCRIPTION OF EUT .....	9
5.2.	CHANNEL LIST .....	10
5.3.	MAXIMUM POWER.....	10
5.4.	TEST CHANNEL CONFIGURATION.....	10
5.5.	THE WORSE CASE POWER SETTING PARAMETER.....	11
5.6.	DESCRIPTION OF AVAILABLE ANTENNAS .....	11
5.7.	SUPPORT UNITS FOR SYSTEM TEST.....	12
<b>6.</b>	<b>MEASURING EQUIPMENT AND SOFTWARE USED.....</b>	<b>13</b>
<b>7.</b>	<b>ANTENNA PORT TEST RESULTS .....</b>	<b>16</b>
7.1.	CONDUCTED OUTPUT POWER.....	16
7.2.	6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....	17
7.3.	POWER SPECTRAL DENSITY .....	19
7.4.	CONDUCTED BAND EDGE AND SPURIOUS EMISSION.....	20
7.5.	DUTY CYCLE .....	22
<b>8.</b>	<b>RADIATED TEST RESULTS.....</b>	<b>23</b>
8.1.	RESTRICTED BANDEDGE .....	31
8.2.	SPURIOUS EMISSIONS(1 GHZ~3 GHZ) .....	45
8.3.	SPURIOUS EMISSIONS(3 GHZ~18 GHZ) .....	51
8.4.	SPURIOUS EMISSIONS(9 KHZ~30 MHZ) .....	75
8.5.	SPURIOUS EMISSIONS(18 GHZ~26 GHZ) .....	78
8.6.	SPURIOUS EMISSIONS(30 MHZ~1 GHZ).....	80
<b>9.</b>	<b>ANTENNA REQUIREMENT .....</b>	<b>82</b>
<b>10.</b>	<b>AC POWER LINE CONDUCTED EMISSION .....</b>	<b>83</b>
<b>11.</b>	<b>TEST DATA FOR BLE .....</b>	<b>86</b>
11.1.	APPENDIX A1: DTS BANDWIDTH.....	86
11.1.1.	Test Result.....	86

11.1.2.	Test Graphs .....	87
11.2.	<i>APPENDIX B1: OCCUPIED CHANNEL BANDWIDTH.....</i>	89
11.2.1.	Test Result.....	89
11.2.2.	Test Graphs .....	90
11.3.	<i>APPENDIX C1: MAXIMUM CONDUCTED OUTPUT POWER.....</i>	92
11.3.1.	Test Result.....	92
11.4.	<i>APPENDIX D1: MAXIMUM POWER SPECTRAL DENSITY.....</i>	93
11.4.1.	Test Result.....	93
11.4.2.	Test Graphs .....	94
11.5.	<i>APPENDIX E1: BAND EDGE MEASUREMENTS.....</i>	96
11.5.1.	Test Result.....	96
11.5.2.	Test Graphs .....	97
11.6.	<i>APPENDIX F1: CONDUCTED SPURIOUS EMISSION .....</i>	99
11.6.1.	Test Result.....	99
11.6.2.	Test Graphs .....	100
11.7.	<i>APPENDIX G1: DUTY CYCLE.....</i>	106
11.7.1.	Test Result.....	106
11.7.2.	Test Graphs .....	107
<b>12.</b>	<b>TEST DATA FOR QHS.....</b>	<b>108</b>
12.1.	<i>APPENDIX A2: DTS BANDWIDTH.....</i>	108
12.1.1.	Test Result.....	108
12.1.2.	Test Graphs .....	109
12.2.	<i>APPENDIX B2: OCCUPIED CHANNEL BANDWIDTH.....</i>	111
12.2.1.	Test Result.....	111
12.2.2.	Test Graphs .....	112
12.3.	<i>APPENDIX C2: MAXIMUM CONDUCTED OUTPUT POWER.....</i>	114
12.3.1.	Test Result.....	114
12.4.	<i>APPENDIX D2: MAXIMUM POWER SPECTRAL DENSITY.....</i>	115
12.4.1.	Test Result.....	115
12.4.2.	Test Graphs .....	116
12.5.	<i>APPENDIX E2: BAND EDGE MEASUREMENTS.....</i>	118
12.5.1.	Test Result.....	118
12.5.2.	Test Graphs .....	119
12.6.	<i>APPENDIX F2: CONDUCTED SPURIOUS EMISSION .....</i>	121
12.6.1.	Test Result.....	121
12.6.2.	Test Graphs .....	122
12.7.	<i>APPENDIX G2: DUTY CYCLE.....</i>	128
12.7.1.	Test Result.....	128
12.7.2.	Test Graphs .....	129

# 1. ATTESTATION OF TEST RESULTS

## Applicant Information

Company Name: Sonos, Inc  
 Address: 301 COROMAR DR. GOLETA, California 93117 United States

## Manufacturer Information

Company Name: Sonos, Inc  
 Address: 301 COROMAR DR. GOLETA, California 93117 United States

## Factory Information


Company Name: Luxshare Intelligent Manufacturing Electronic Services (Kunshan) Co., LTD.  
 Address: Room 2, No. 66, Third Avenue, Comprehensive Bonded Zone, Kunshan Development Zone Kunshan City, 215300 China

## EUT Information

EUT Name: Headphone  
 Model: S49  
 Brand: SONOS  
 Sample Received Date: December 4, 2023  
 Sample Status: Normal  
 Sample ID: 6713828  
 Date of Tested: December 7, 2023 to December 29, 2023


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	Pass

Prepared By:



Kebo Zhang  
 Senior Project Engineer

Checked By:



Denny Huang  
 Senior Project Engineer

Approved By:



Stephen Guo  
 Operations Manager

## 2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART C, KDB 558074 D01 15.247 Meas Guidance v05r02, 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, ANSI C63.10-2013.

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 4102.01)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1187)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p><b>ISED (Company No.: 21320)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p><b>VCCI (Registration No.: G-20192, C-20153, T-20155 and R-20202)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20192 and R-20202 Shielding Room B, the VCCI registration No. is C-20153 and T-20155</p>
---------------------------	--

Note 1:

All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
DTS and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.686 dB
Maximum Power Spectral Density Level	±0.743 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	



## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

EUT Name	Headphone
Model	S49
Normal Test Voltage	5 Vdc from USB port
Battery information	3.89 Vdc, 1060mAh/4.124Wh

BLE Mode	
Frequency Range:	2402 MHz to 2480 MHz
Type of Modulation:	GFSK
Data Rates:	1Mbps/2Mbps

QHS Mode	
Frequency Range:	2404 MHz to 2478 MHz
Type of Modulation:	GFSK
Data Rates:	2Mbps/3Mbps/4Mbps/5Mbps/6Mbps

## 5.2. CHANNEL LIST

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	11	2424	22	2446	33	2468
1	2404	12	2426	23	2448	34	2470
2	2406	13	2428	24	2450	35	2472
3	2408	14	2430	25	2452	36	2474
4	2410	15	2432	26	2454	37	2476
5	2412	16	2434	27	2456	38	2478
6	2414	17	2436	28	2458	39	2480
7	2416	18	2438	29	2460	/	/
8	2418	19	2440	30	2462	/	/
9	2420	20	2442	31	2464	/	/
10	2422	21	2444	32	2468	/	/

Note: BLE 2M and QHS mode does not support channel 0&12&39.

## 5.3. MAXIMUM POWER

Test Mode	Frequency (MHz)	Max Peak Power (dBm)
LE 1M	2402 ~ 2480	7.83
LE 2M	2404 ~ 2478	7.74
QHS P2	2404 ~ 2478	10.88
QHS P6	2404 ~ 2478	10.36

## 5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
LE 1M	CH 0(Low Channel), CH 19(MID Channel), CH 39(High Channel)	2402 MHz, 2440 MHz, 2480 MHz
LE 2M	CH 1(Low Channel), CH 19(MID Channel), CH 38(High Channel)	2404 MHz, 2440 MHz, 2478 MHz
QHS P2	CH 1(Low Channel), CH 19(MID Channel), CH 38(High Channel)	2404 MHz, 2440 MHz, 2478 MHz
QHS P6	CH 1(Low Channel), CH 19(MID Channel), CH 38(High Channel)	2404 MHz, 2440 MHz, 2478 MHz

Note: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates.

## 5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software Version		Bluetest 3		
Modulation Type	Transmit Antenna Number	Test Software setting value		
		LCH	MCH	HCH
GFSK(1Mbps)	1	default	default	default
GFSK(2Mbps)	1	default	default	default
QHS P2	1	7	7	7
QHS P6	1	7	7	7

## 5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2402-2480	Planar inverted F antenna	2.2

Test Mode	Transmit and Receive Mode	Description
GFSK(1Mbps)	1TX, 1RX	Chain 1 can be used as transmitting/receiving antenna.
GFSK(2Mbps)	1TX, 1RX	Chain 1 can be used as transmitting/receiving antenna.
QHS P2	1TX, 1RX	Chain 1 can be used as transmitting/receiving antenna.
QHS P6	1TX, 1RX	Chain 1 can be used as transmitting/receiving antenna.

Note: The value of the antenna gain was declared by customer.

## 5.7. SUPPORT UNITS FOR SYSTEM TEST

### SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	Laptop	Lenovo	E42-80	R303U5AG
2	Adapter	SAMSUNG	ETA-U90CBC	5Vdc,2A

### I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/


### ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

### TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

### SETUP DIAGRAM FOR TESTS

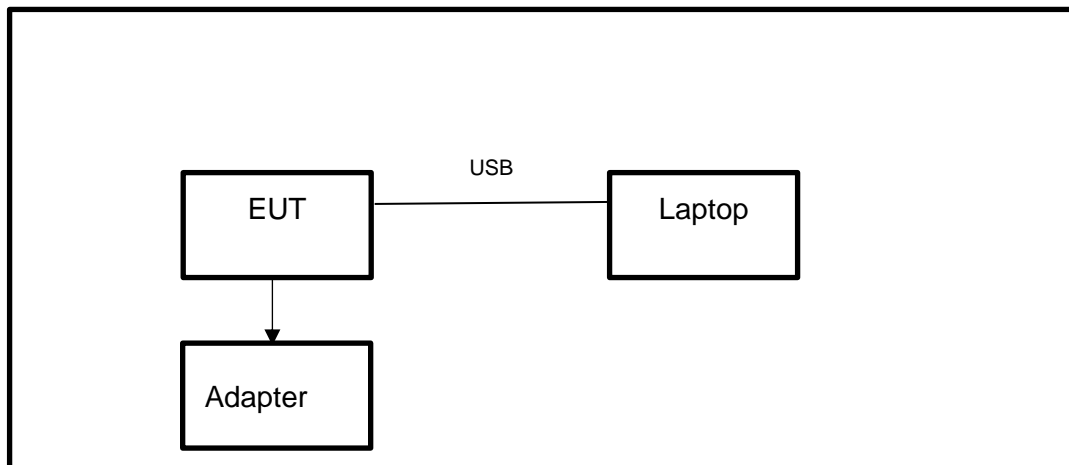

## 6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Mar.31,2023	Mar.30,2024
Vector Signal Generator	R&S	SMBV100A	261637	Oct.12, 2023	Oct.11, 2024
Signal Generator	R&S	SMB100A	178553	Oct.12, 2023	Oct.11, 2024
Signal Analyzer	R&S	FSV40	101118	Oct.12, 2023	Oct.11, 2024
Software					
Description	Manufacturer	Name		Version	
For R&S TS 8997 Test System	Rohde & Schwarz	EMC 32		10.60.10	
Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wideband Radio Communication Tester	R&S	CMW500	155523	Oct.12, 2023	Oct.11, 2024
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.25, 2023	Sep.24, 2024
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Oct.12, 2023	Oct.11, 2024
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Oct.12, 2023	Oct.11, 2024
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Oct.12, 2023	Oct.11, 2024
DC power supply	Keysight	E3642A	MY55159130	Oct.12, 2023	Oct.11, 2024
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Oct.12, 2023	Oct.11, 2024
Attenuator	Aglient	8495B	2814a12853	Oct.12, 2023	Oct.11, 2024
RF Control Unit	Tonscend	JS0806-2	23B80620666	April 18, 2023	April 17, 2024
Software					
Description	Manufacturer	Name		Version	
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System		V3.2.22	

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Oct.13, 2023	Oct.12, 2024
Two-Line V-Network	R&S	ENV216	101983	Oct.13, 2023	Oct.12, 2024
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Oct.13, 2023	Oct.12, 2024
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct.12, 2023	Oct.11, 2024
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	Aug.02, 2021	Aug.01, 2024
Preamplifier	HP	8447D	2944A09099	Oct.12, 2023	Oct.11, 2024
EMI Measurement Receiver	R&S	ESR26	101377	Oct.12, 2023	Oct.11, 2024
Horn Antenna	TDK	HRN-0118	130940	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Oct.12, 2023	Oct.11, 2024
Horn Antenna	Schwarzbeck	BBHA9170	697	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-2	TRS-307-00003	Oct.12, 2023	Oct.11, 2024
Preamplifier	TDK	PA-02-3	TRS-308-00002	Oct.12, 2023	Oct.11, 2024
Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec.13, 2024
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Oct.12, 2023	Oct.11, 2024
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Oct.12, 2023	Oct.11, 2024
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Oct.12, 2023	Oct.11, 2024
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1

<b>Other Instrument</b>					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Oct.21, 2023	Oct.20, 2024
Barometer	Yiyi	Baro	N/A	Oct.19, 2023	Oct.18, 2024
Attenuator	Agilent	8495B	2814a12853	Oct.12, 2023	Oct.11, 2024

## 7. ANTENNA PORT TEST RESULTS

### 7.1. CONDUCTED OUTPUT POWER

#### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3)	Conduct Output Power	1 watt or 30 dBm	2400-2483.5

#### TEST PROCEDURE


Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the output power, after any corrections for external attenuators and cables.

Peak detector is used for Peak power measurement.

AVG detector is used for AVG power measurement, The test result in dBm by adding  $[10 \log (1 / D)]$ , where D is the duty cycle.

#### TEST SETUP



#### TEST ENVIRONMENT

Temperature	24.2°C	Relative Humidity	56%
Atmosphere Pressure	101.2kPa	Test Voltage	DC 5 V

#### TEST DATE / ENGINEER

Test Date	December 12, 2023	Test By	Walker Yuan
-----------	-------------------	---------	-------------

#### TEST RESULTS

Please refer to section "Test Data" - Appendix C1&C2.



## 7.2. 6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2)	6 dB Bandwidth	≥ 500 kHz	2400-2483.5

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.8 for DTS bandwidth and clause 6.9 for Occupied Bandwidth.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	For 6 dB Bandwidth: Enough to capture all products of the modulation carrier emission For 99 % Occupied Bandwidth: Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: ≥3 × RBW For 99 % Occupied Bandwidth: ≥3 × RBW
Trace	Max hold
Sweep	Auto couple

a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.

b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### TEST SETUP

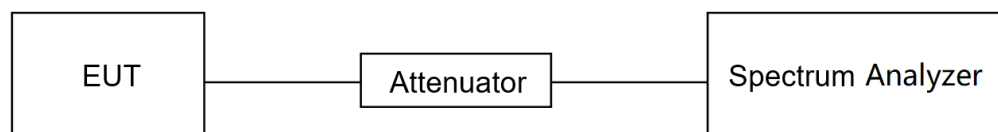

### TEST ENVIRONMENT

Temperature	24.2°C	Relative Humidity	56%
-------------	--------	-------------------	-----

---

Atmosphere Pressure	101.2kPa	Test Voltage	DC 5 V
---------------------	----------	--------------	--------

**TEST DATE / ENGINEER**

Test Date	December 12, 2023	Test By	Walker Yuan
-----------	-------------------	---------	-------------

**TEST RESULTS**

Please refer to section "Test Data" - Appendix A1&B1&A2&B2.

### 7.3. POWER SPECTRAL DENSITY

#### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5

#### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.10.2.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x 6dB bandwidth
Trace	Max Hold
Sweep time	Auto couple

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

#### TEST SETUP

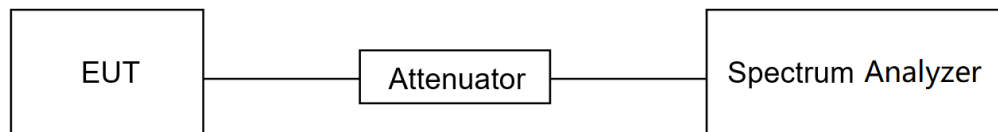

#### TEST ENVIRONMENT

Temperature	24.2°C	Relative Humidity	56%
Atmosphere Pressure	101.2kPa	Test Voltage	DC 5 V

#### TEST DATE / ENGINEER

Test Date	December 12, 2023	Test By	Walker Yuan
-----------	-------------------	---------	-------------

#### TEST RESULTS

Please refer to section "Test Data" - Appendix D1&D2.

## 7.4. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d)	Conducted Bandedge and Spurious Emissions	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.11 and 11.13.

Connect the EUT to the spectrum analyzer and use the following settings for reference level measurement:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	$1.5 \times \text{DTS bandwidth}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.

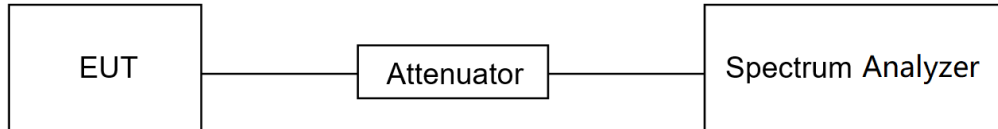**TEST SETUP****TEST ENVIRONMENT**

Temperature	24.2°C	Relative Humidity	56%
Atmosphere Pressure	101.2kPa	Test Voltage	DC 5 V

**TEST DATE / ENGINEER**

Test Date	December 12, 2023	Test By	Walker Yuan
-----------	-------------------	---------	-------------

**TEST RESULTS**

Please refer to section "Test Data" - Appendix E1&F1&E2&F2.

## 7.5. DUTY CYCLE


### LIMITS

None; for reporting purposes only.

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.6 Zero – Span Spectrum Analyzer method.

### TEST SETUP

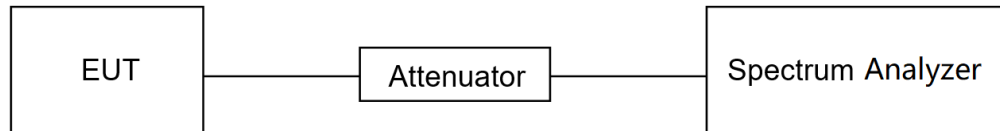

### TEST ENVIRONMENT

Temperature	24.2°C	Relative Humidity	56%
Atmosphere Pressure	101.2kPa	Test Voltage	DC 5 V

### TEST DATE / ENGINEER

Test Date	December 12, 2023	Test By	Walker Yuan
-----------	-------------------	---------	-------------

### TEST RESULTS

Please refer to section "Test Data" - Appendix G1&G2.

## 8. RADIATED TEST RESULTS

### LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit ( $\mu\text{V}/\text{m}$ ) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	$2400/F(\text{kHz})$	300
0.490-1.705	$24000/F(\text{kHz})$	30
1.705-30.0	30	30

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6c

## **TEST PROCEDURE**

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.



8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of  $377\Omega$ . For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to  $Y-51.5 = Z$  dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


Above 1 GHz

The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.5. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

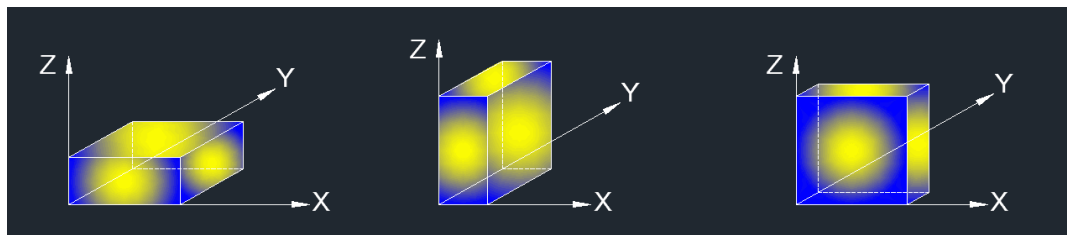

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

For Restricted Bandedge:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes have been tested, but only the worst data was recorded in the report.
5. dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 3 GHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (3 GHz ~ 18 GHz):

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG:  $VBW=1/T_{on}$ , where:  $T_{on}$  is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):


Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.


### TEST SETUP

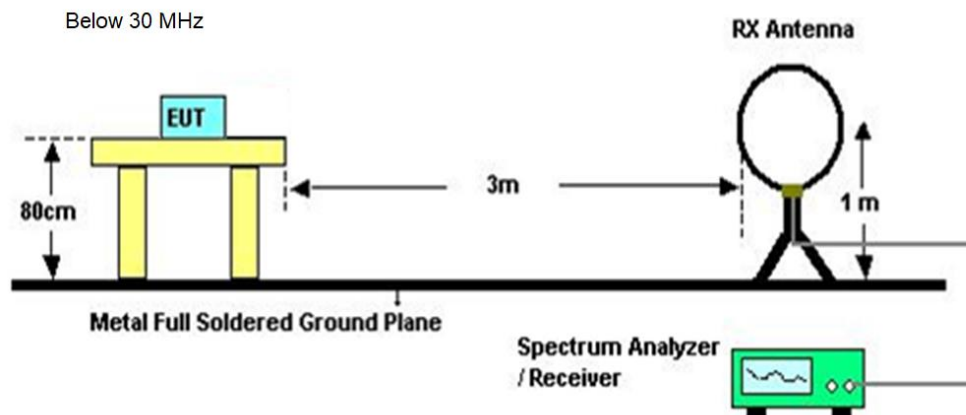

Below 1 GHz and above 30 MHz

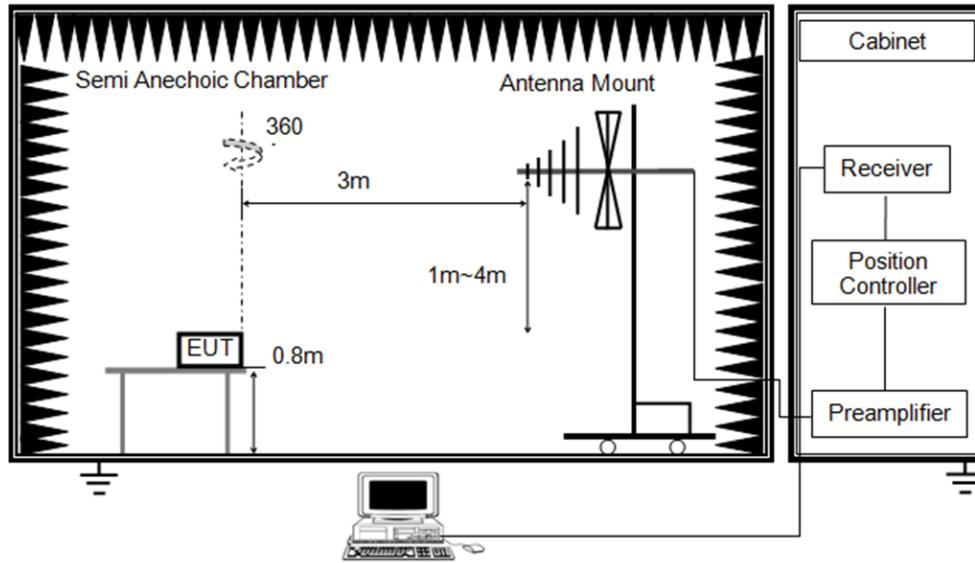

Above 1 GHz

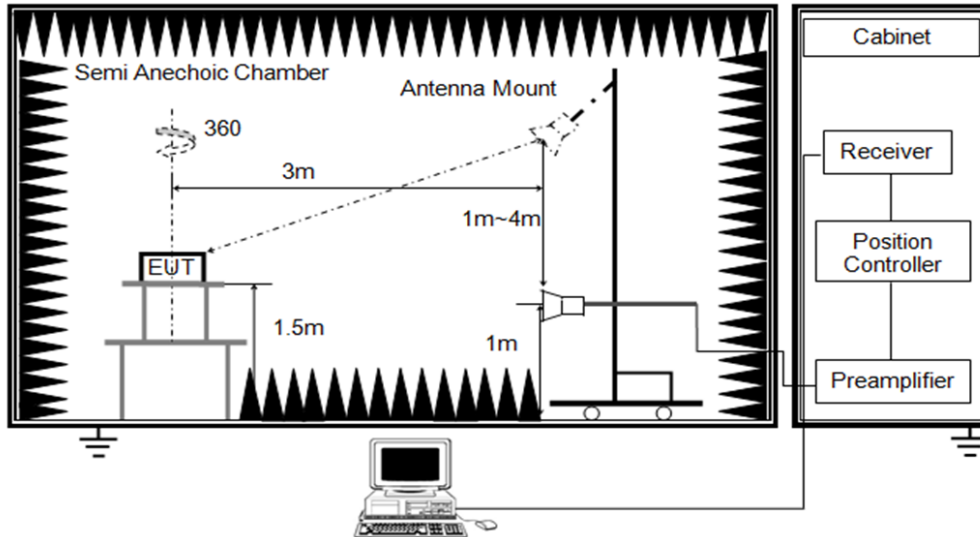

**TEST ENVIRONMENT**

Temperature	24.8°C	Relative Humidity	62%
Atmosphere Pressure	101kPa	Test Voltage	


**TEST DATE / ENGINEER**

Test Date	December 29, 2023	Test By	Rex Huang
-----------	-------------------	---------	-----------

**TEST RESULTS**


## 8.1. RESTRICTED BANDEDGE

Test Mode:	BLE 1M PK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 5 V

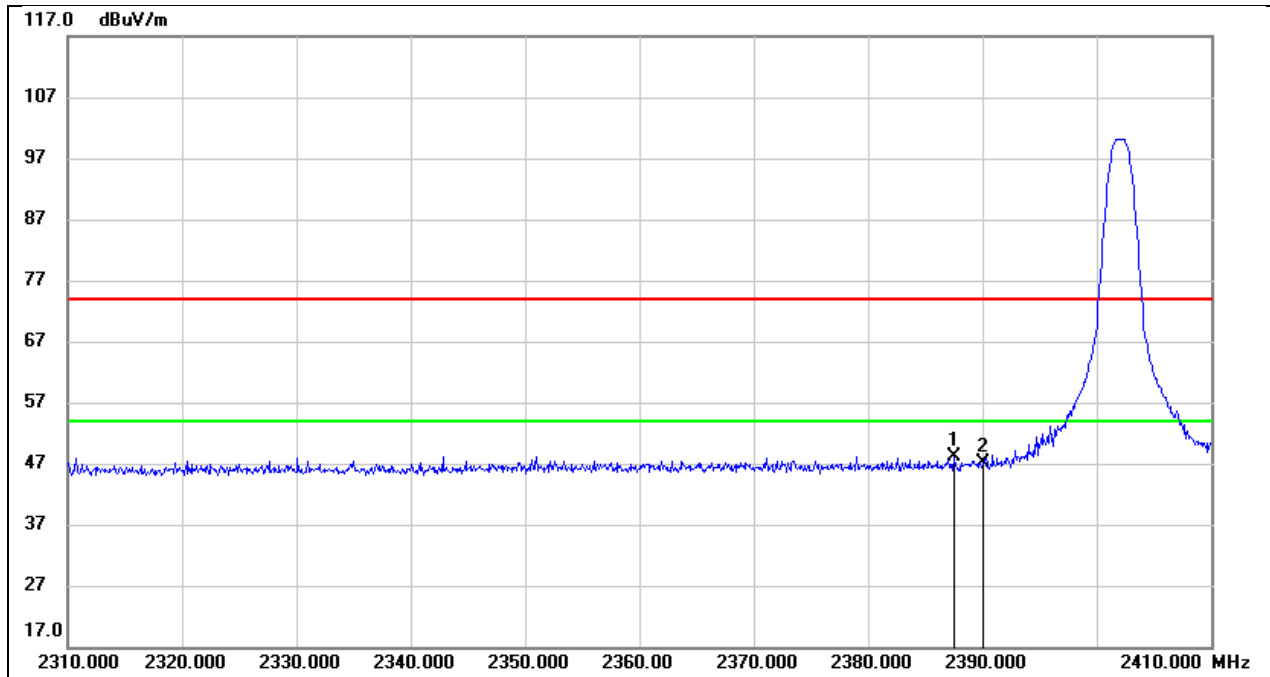

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.500	15.89	32.16	48.05	74.00	-25.95	peak
2	2390.000	15.04	32.16	47.20	74.00	-26.80	peak


Test Mode:	BLE 1M PK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	DC 5 V

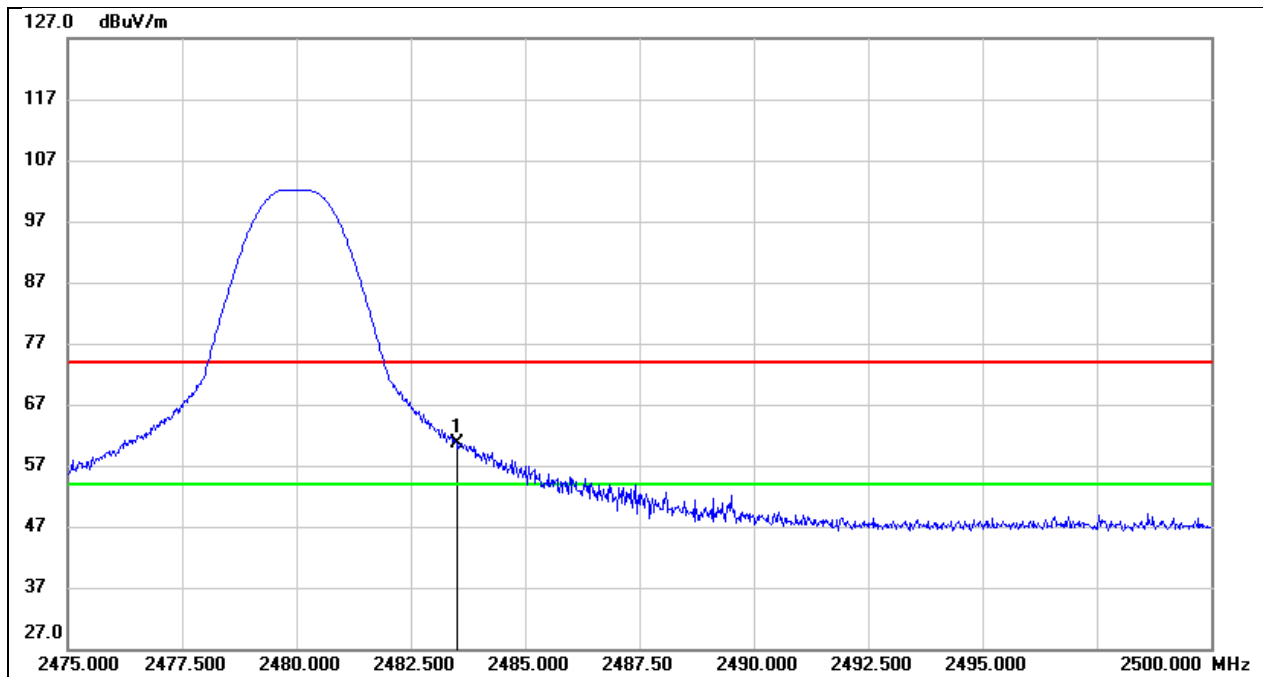

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	28.24	32.44	60.68	74.00	-13.32	peak




Test Mode:	BLE 1M AV	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	DC 5 V

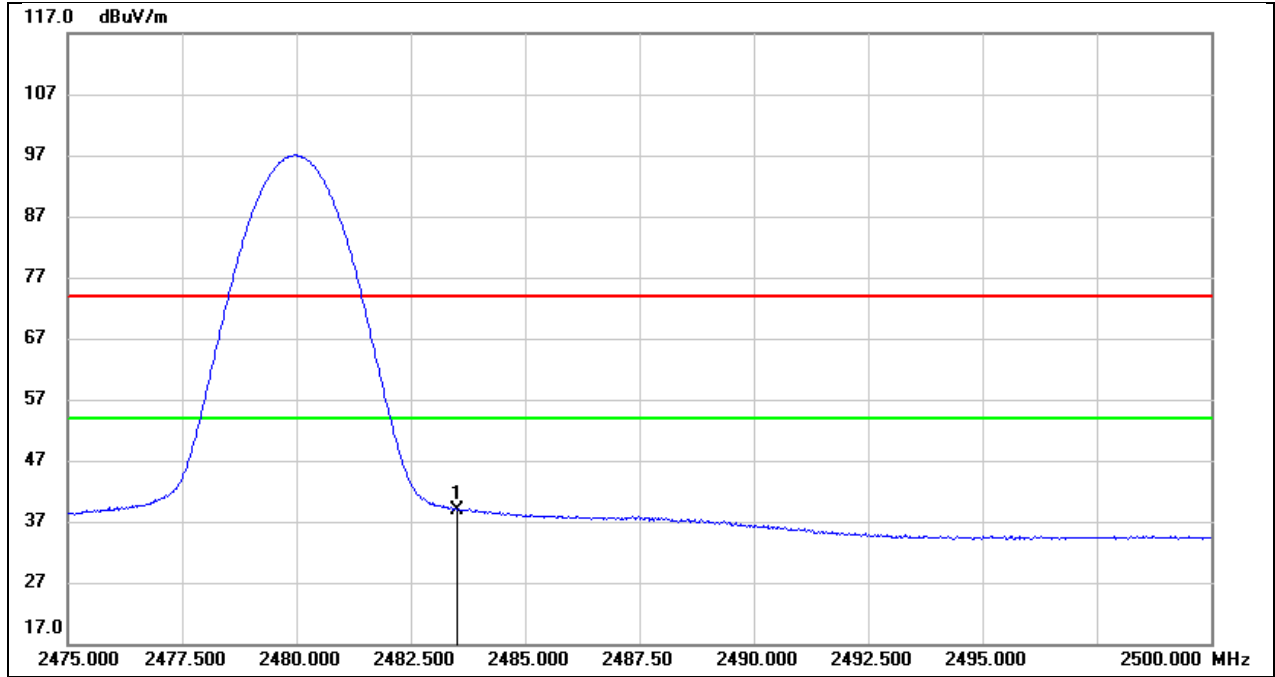


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	6.50	32.44	38.94	54.00	-15.06	AVG

Test Mode:	BLE 2M PK	Frequency(MHz):	2404
Polarity:	Horizontal	Test Voltage:	DC 5 V

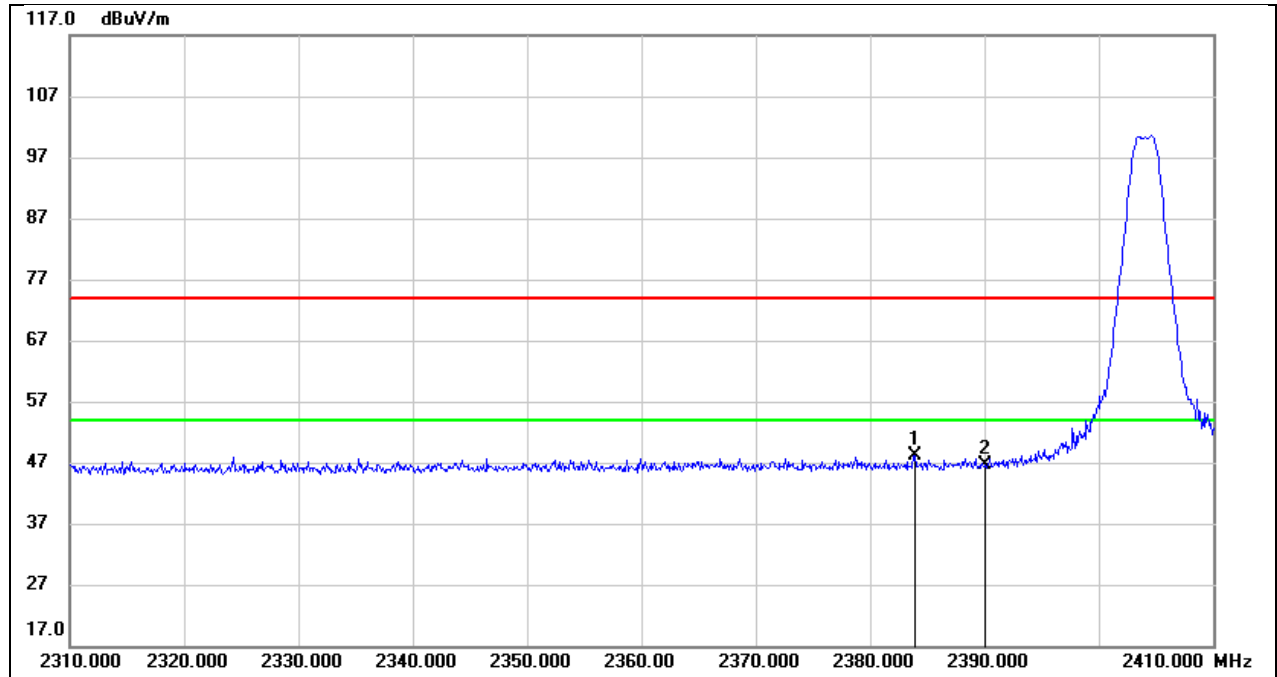


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2383.900	15.98	32.14	48.12	74.00	-25.88	peak
2	2390.000	14.38	32.16	46.54	74.00	-27.46	peak

Test Mode:	BLE 2M PK	Frequency(MHz):	2478
Polarity:	Horizontal	Test Voltage:	DC 5 V

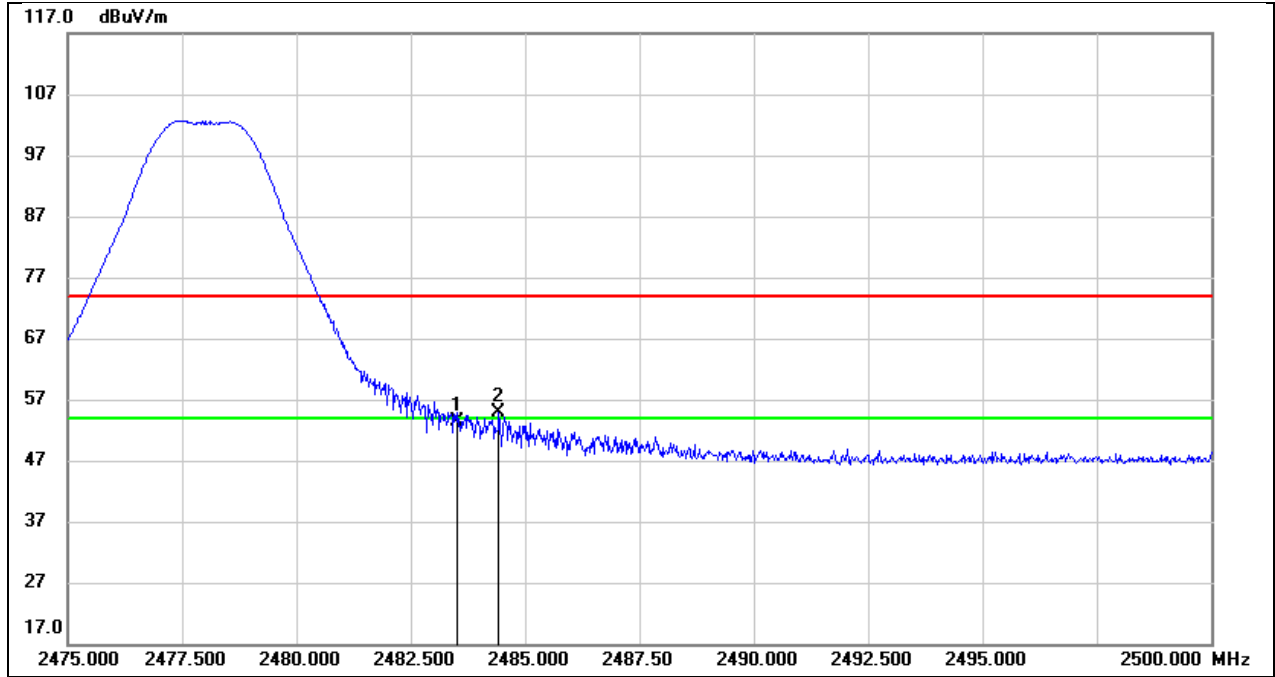


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	20.83	32.44	53.27	74.00	-20.73	peak
2	2484.425	22.42	32.44	54.86	74.00	-19.14	peak

Test Mode:	BLE 2M AV	Frequency(MHz):	2478
Polarity:	Horizontal	Test Voltage:	DC 5 V

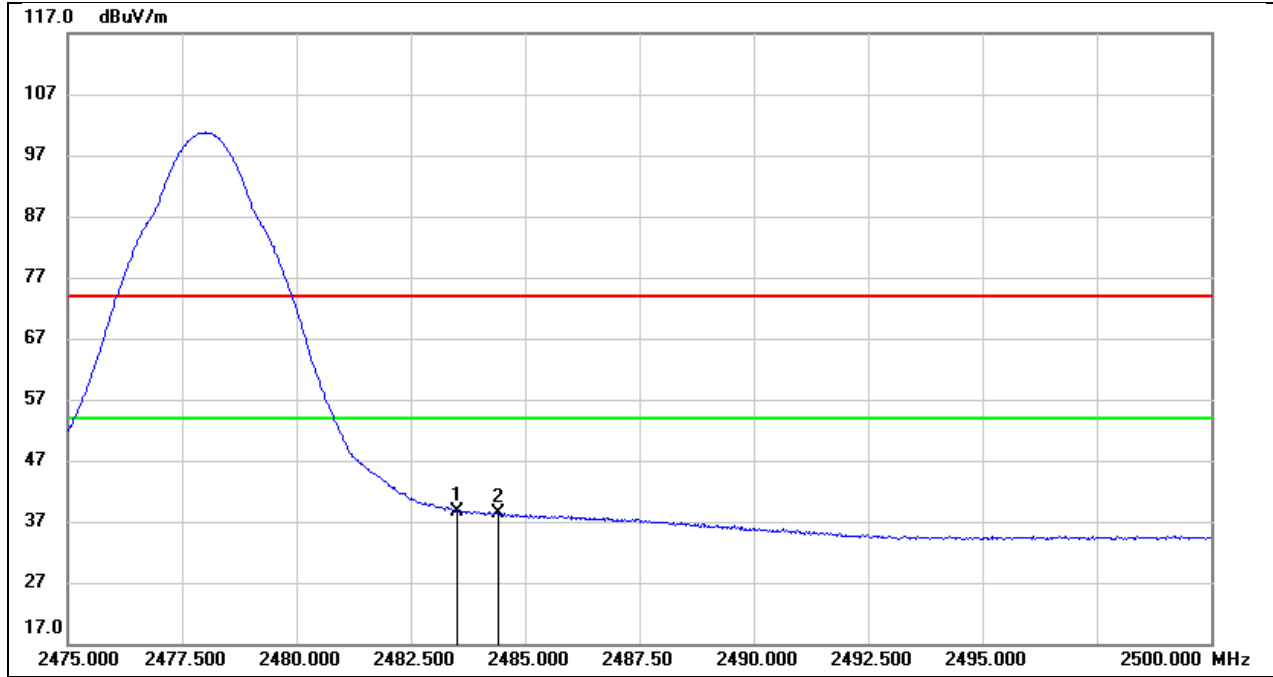


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	6.30	32.44	38.74	54.00	-15.26	AVG
2	2484.425	5.90	32.44	38.34	54.00	-15.66	AVG

Test Mode:	QHS 2M PK	Frequency(MHz):	2404
Polarity:	Horizontal	Test Voltage:	DC 5 V

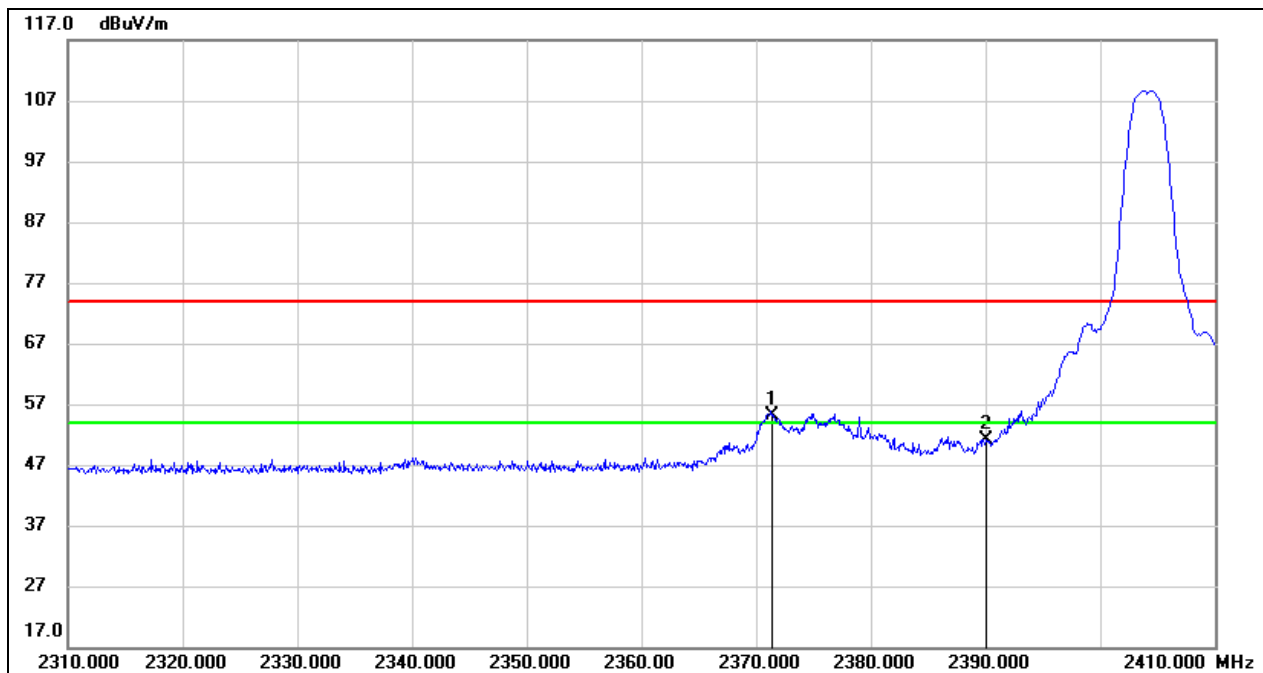


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2371.400	22.90	32.11	55.01	74.00	-18.99	peak
2	2390.000	19.01	32.16	51.17	74.00	-22.83	peak

Test Mode:	QHS 2M AVG	Frequency(MHz):	2404
Polarity:	Horizontal	Test Voltage:	DC 5 V

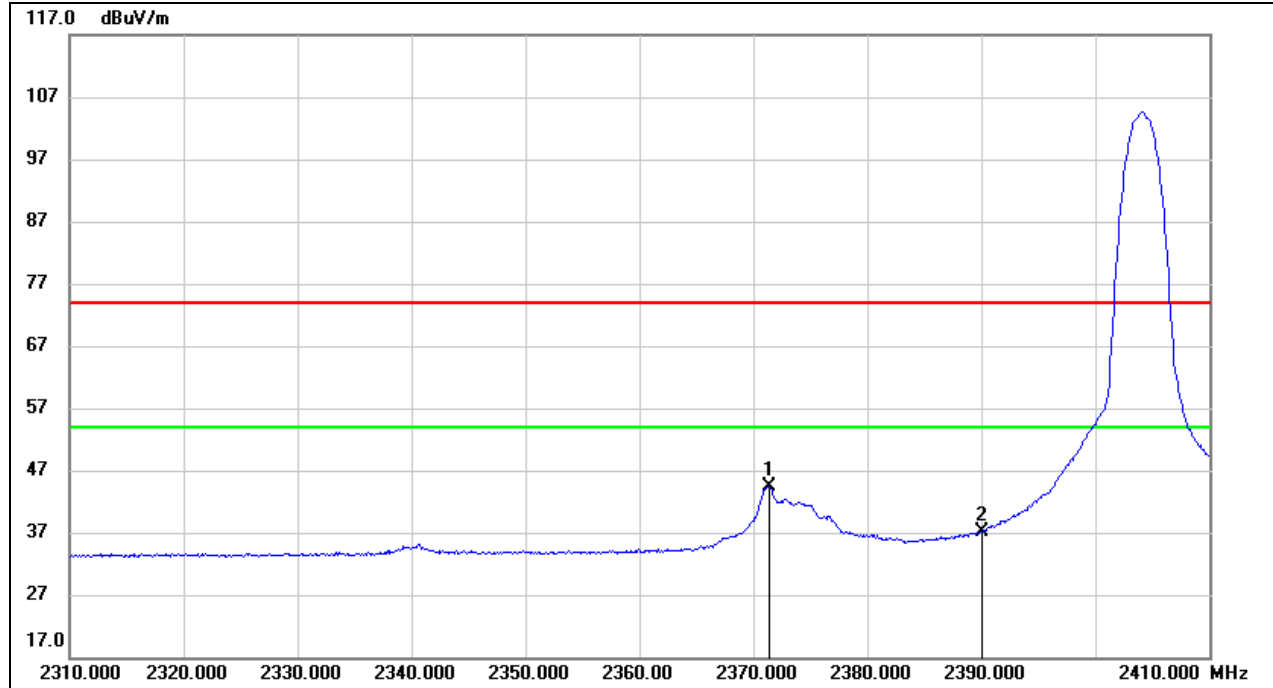


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2371.400	12.39	32.11	44.50	54.00	-9.50	AVG
2	2390.000	5.00	32.16	37.16	54.00	-16.84	AVG

Test Mode:	QHS 2M PK	Frequency(MHz):	2478
Polarity:	Horizontal	Test Voltage:	DC 5 V

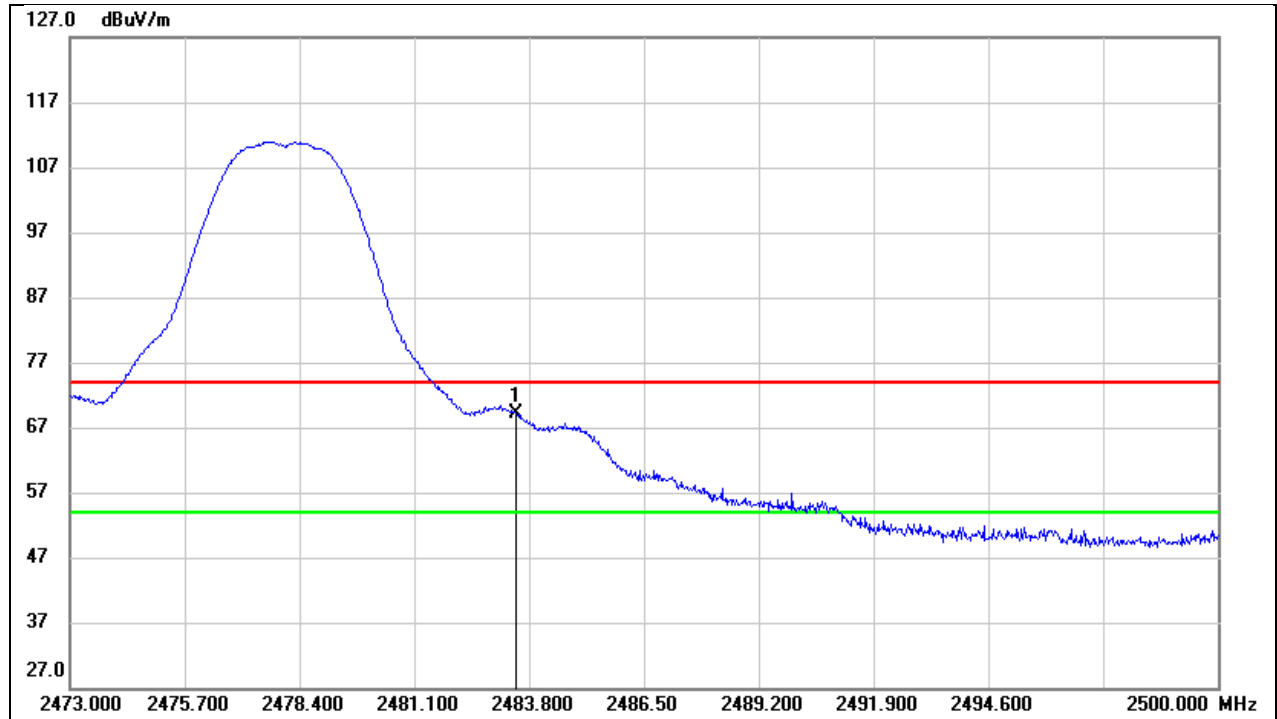

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	36.73	32.44	69.17	74.00	-4.83	peak


Test Mode:	QHS 2M AV	Frequency(MHz):	2478
Polarity:	Horizontal	Test Voltage:	DC 5 V

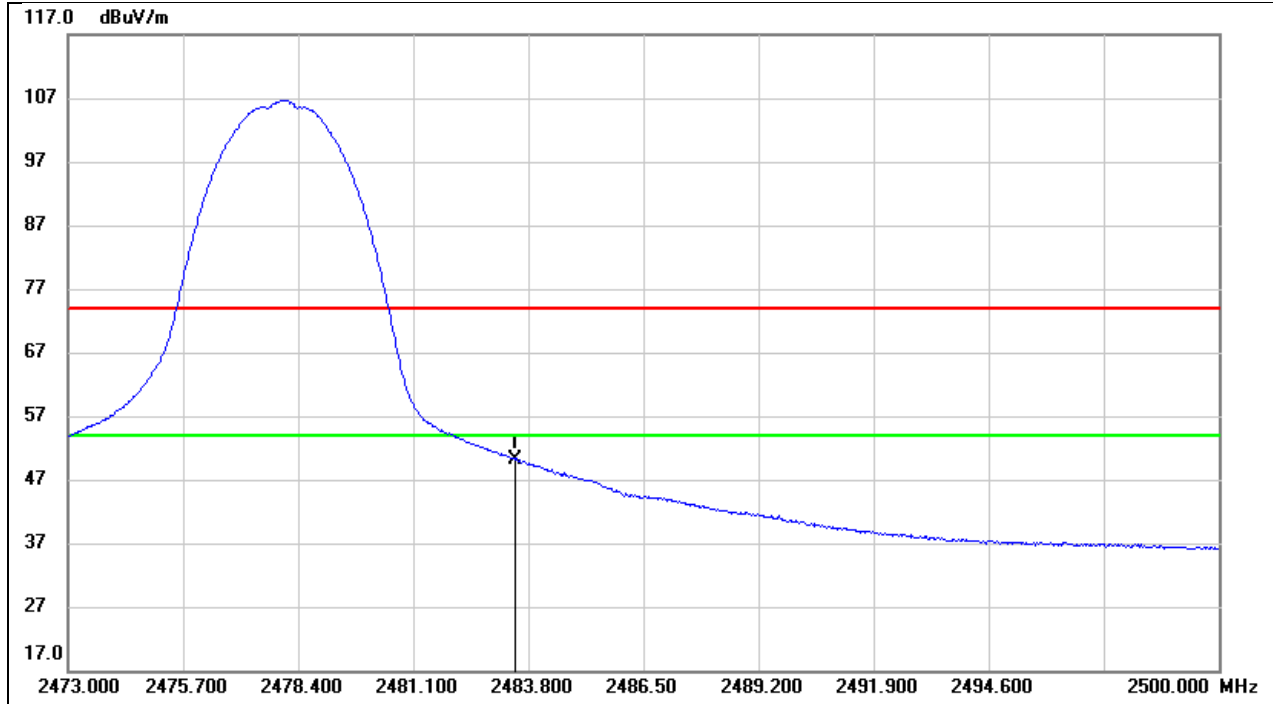

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	17.72	32.44	50.16	54.00	-3.84	AVG




Test Mode:	QHS 6M PK	Frequency(MHz):	2404
Polarity:	Horizontal	Test Voltage:	DC 5 V

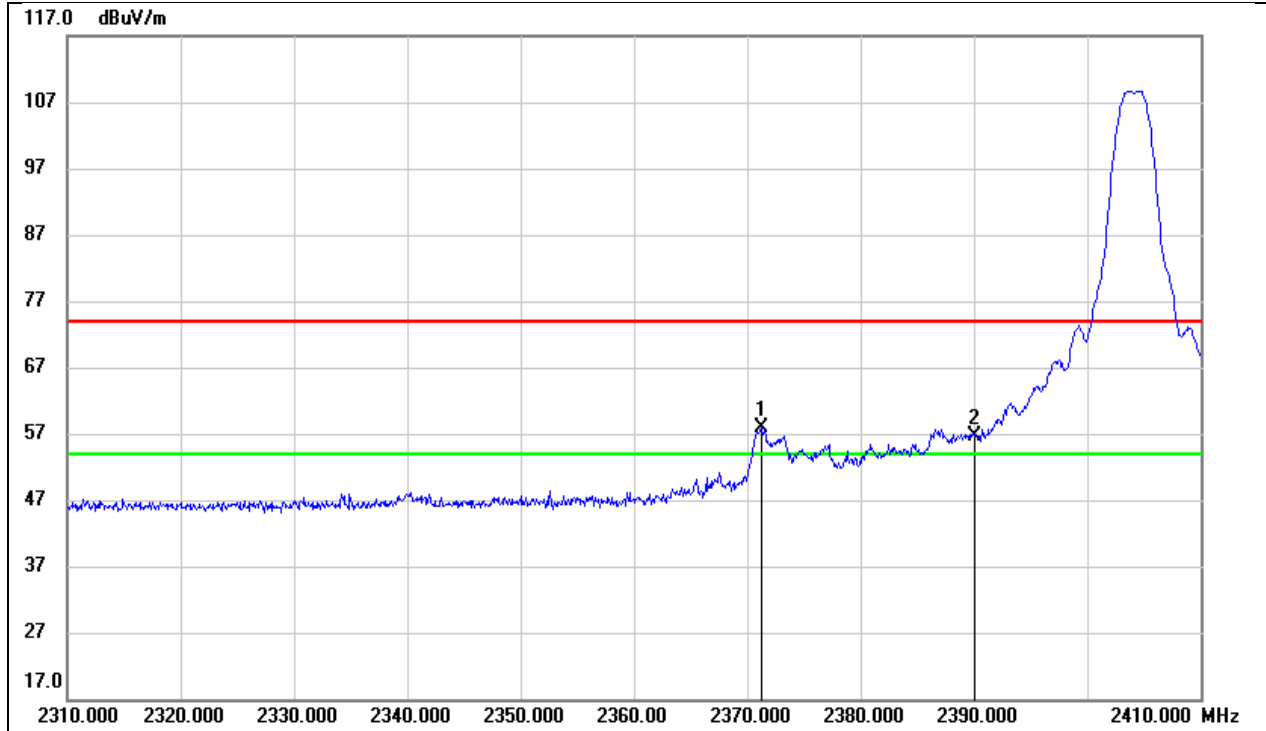


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2371.200	25.89	32.11	58.00	74.00	-16.00	peak
2	2390.000	24.57	32.16	56.73	74.00	-17.27	peak

Test Mode:	QHS 6M AVG	Frequency(MHz):	2404
Polarity:	Horizontal	Test Voltage:	DC 5 V

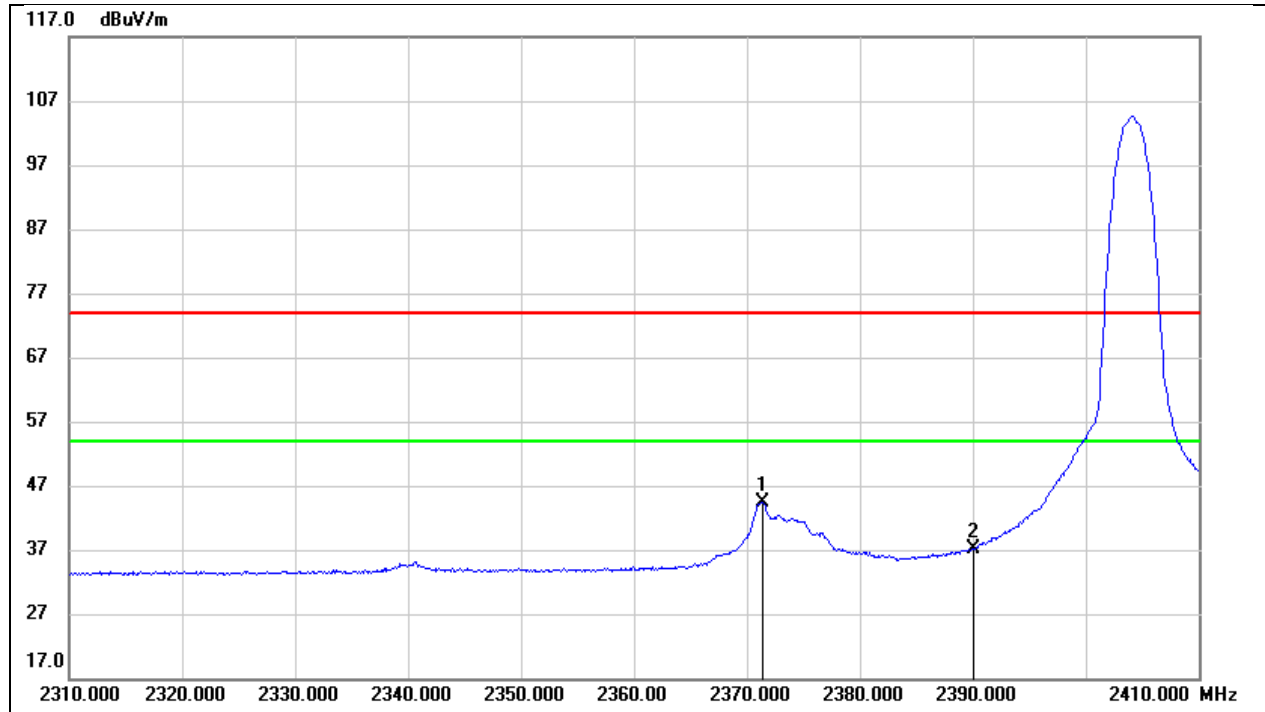


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2371.400	12.39	32.11	44.50	54.00	-9.50	AVG
2	2390.000	5.00	32.16	37.16	54.00	-16.84	AVG

Test Mode:	QHS 6M PK	Frequency(MHz):	2478
Polarity:	Horizontal	Test Voltage:	DC 5 V

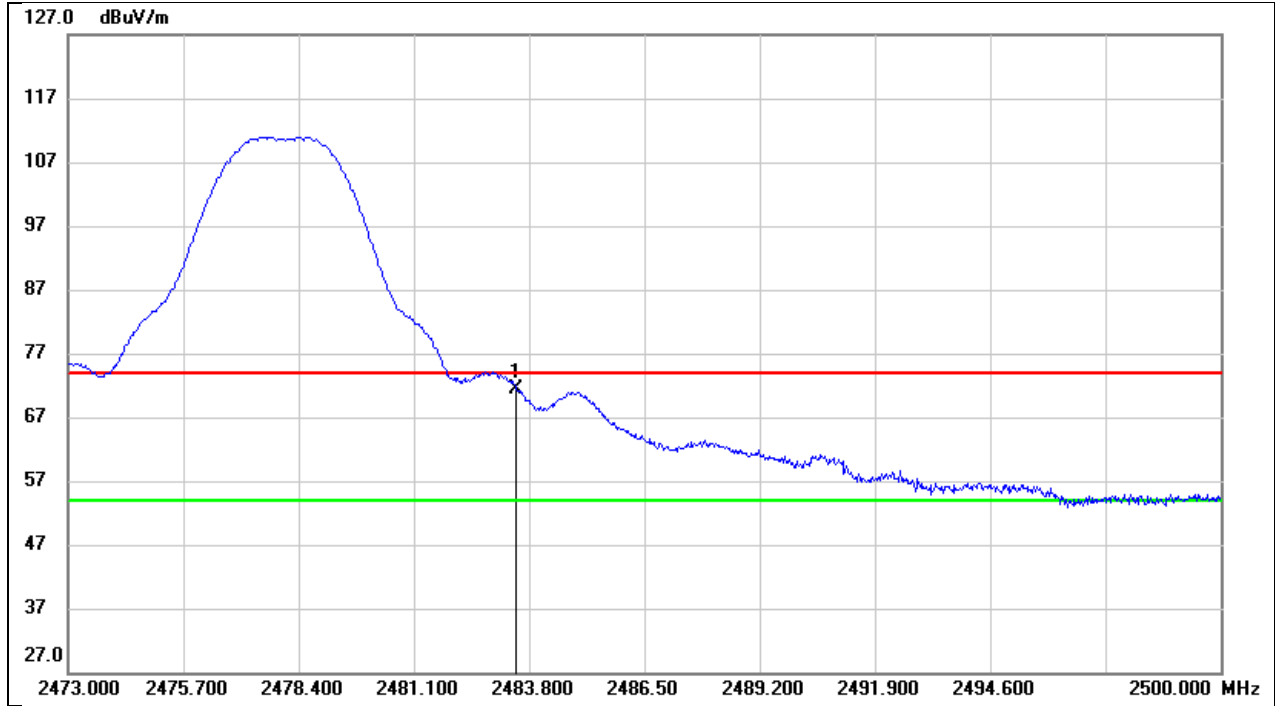

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	38.95	32.44	71.39	74.00	-2.61	peak


Test Mode:	QHS 6M AV	Frequency(MHz):	2478
Polarity:	Horizontal	Test Voltage:	DC 5 V

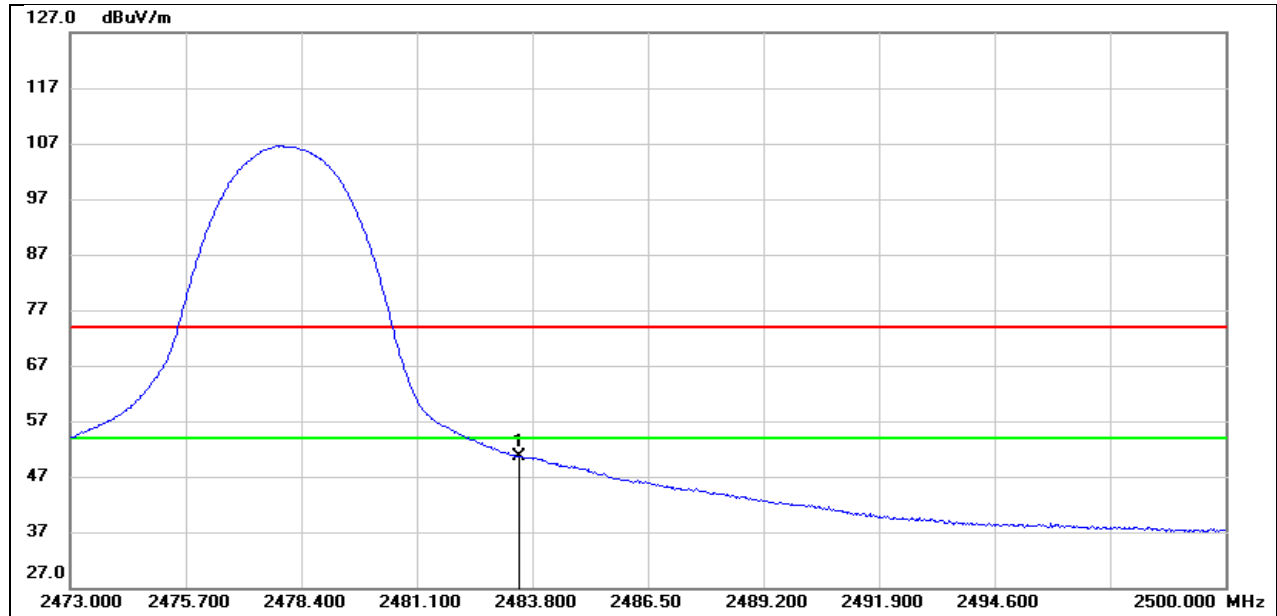

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	18.11	32.44	50.55	54.00	-3.45	AVG


## 8.2. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 5 V

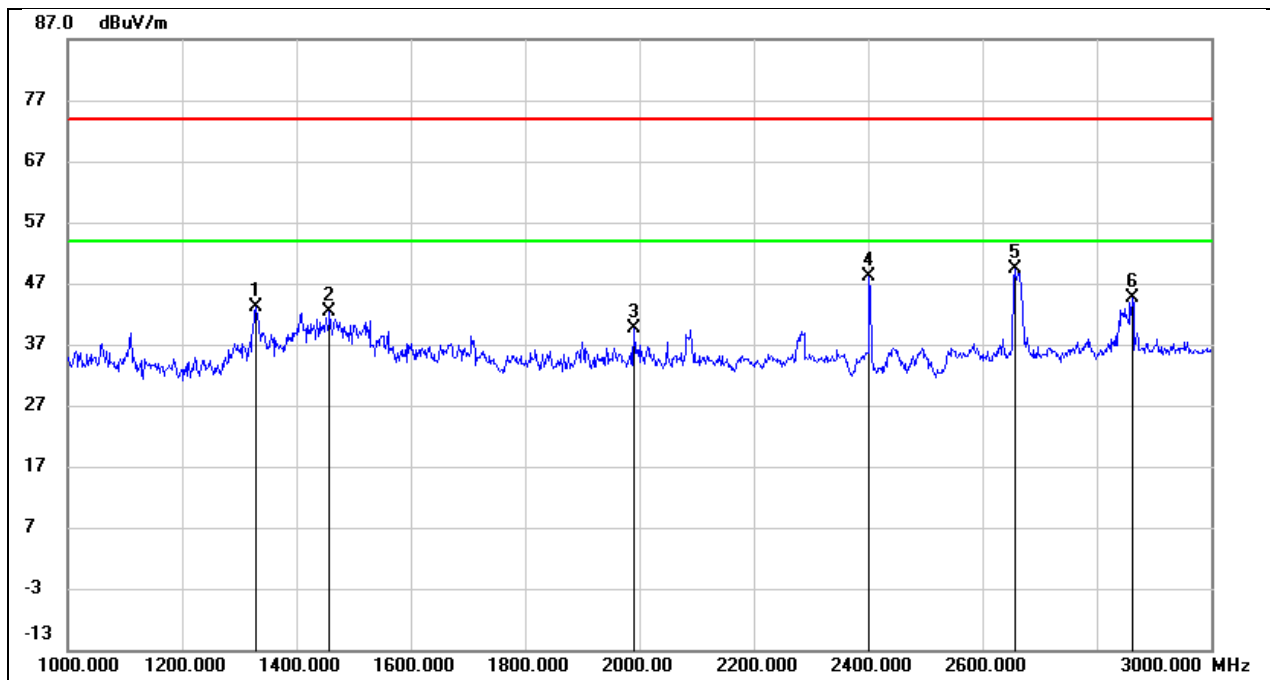


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1328.000	56.64	-13.50	43.14	74.00	-30.86	peak
2	1458.000	55.37	-12.90	42.47	74.00	-31.53	peak
3	1990.000	50.68	-11.09	39.59	74.00	-34.41	peak
4	2402.000	57.05	-8.99	48.06	/	/	fundamental
5	2656.000	57.52	-8.02	49.50	74.00	-24.50	peak
6	2862.000	51.96	-7.40	44.56	74.00	-29.44	peak

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	DC 5 V

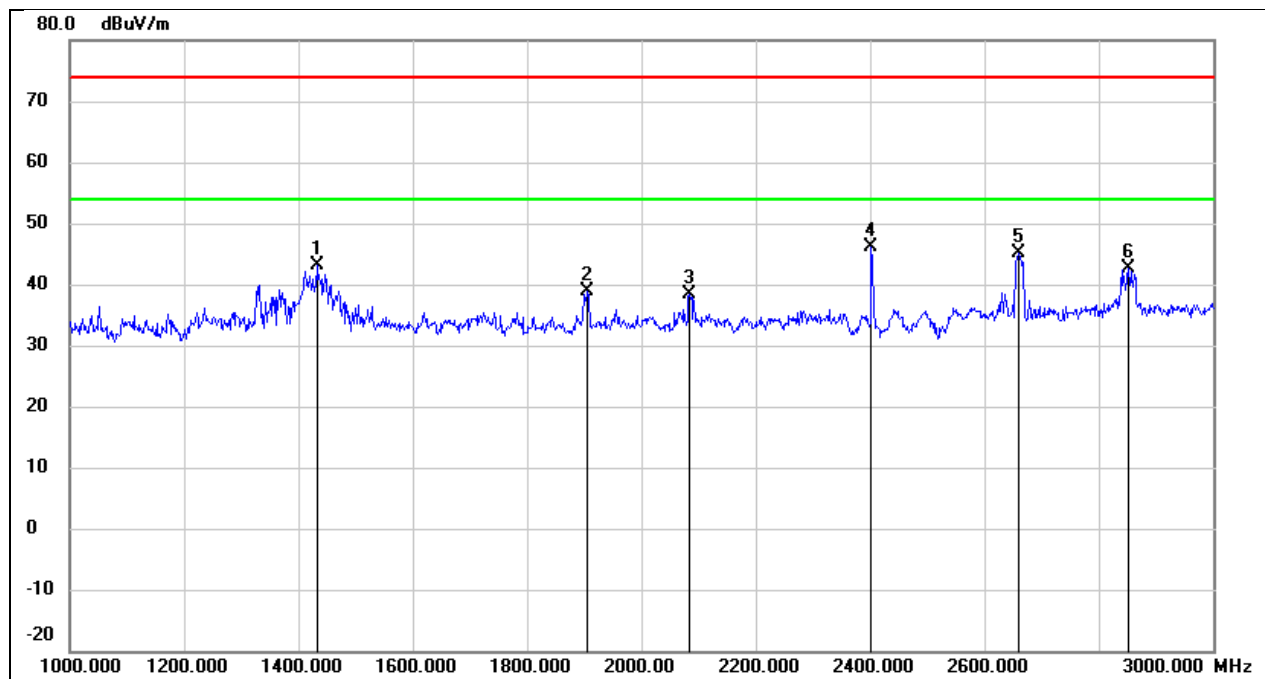


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1432.000	56.21	-13.02	43.19	74.00	-30.81	peak
2	1906.000	50.23	-11.37	38.86	74.00	-35.14	peak
3	2084.000	49.04	-10.63	38.41	74.00	-35.59	peak
4	2402.000	55.05	-8.99	46.06	/	/	fundamental
5	2660.000	53.06	-8.01	45.05	74.00	-28.95	peak
6	2852.000	49.99	-7.43	42.56	74.00	-31.44	peak

Test Mode:	BLE 1M	Frequency(MHz):	2440
Polarity:	Horizontal	Test Voltage:	DC 5 V

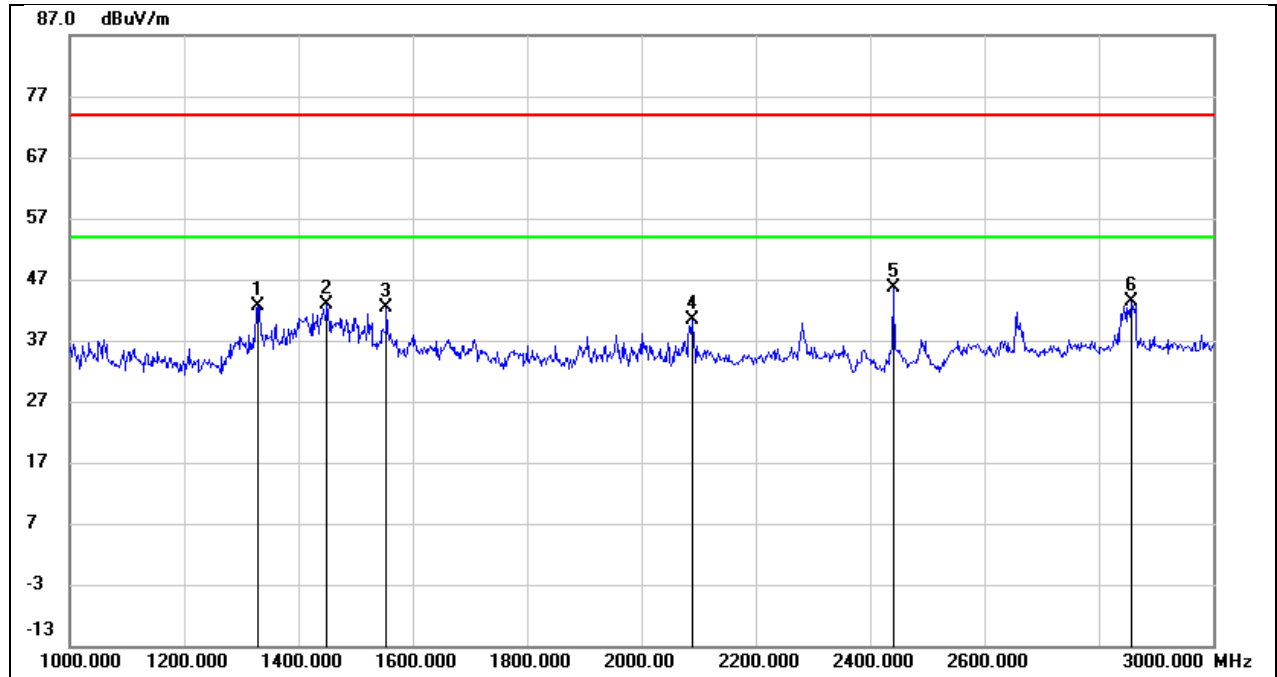

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1328.000	56.17	-13.50	42.67	74.00	-31.33	peak
2	1450.000	55.74	-12.94	42.80	74.00	-31.20	peak
3	1554.000	54.97	-12.53	42.44	74.00	-31.56	peak
4	2088.000	51.09	-10.61	40.48	74.00	-33.52	peak
5	2440.000	54.32	-8.80	45.52	/	/	fundamental
6	2856.000	50.73	-7.41	43.32	74.00	-30.68	peak


Test Mode:	BLE 1M	Frequency(MHz):	2440
Polarity:	Vertical	Test Voltage:	DC 5 V

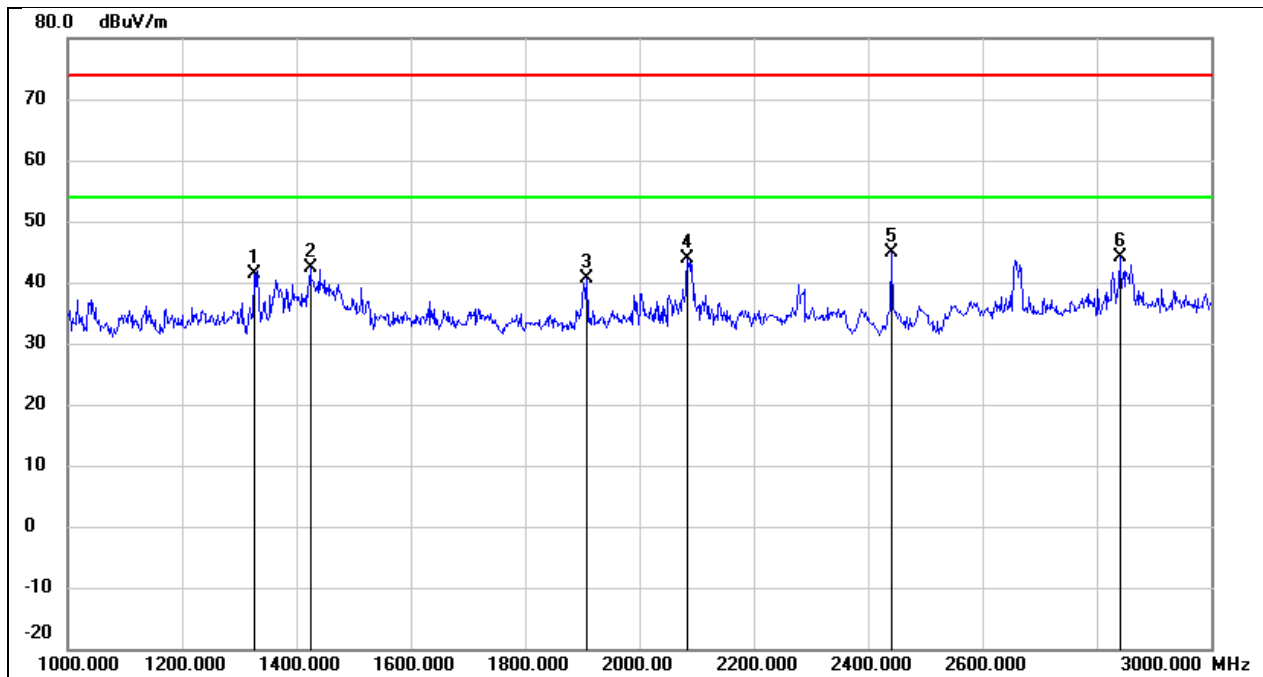

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1326.000	55.01	-13.52	41.49	74.00	-32.51	peak
2	1424.000	55.32	-13.06	42.26	74.00	-31.74	peak
3	1908.000	51.92	-11.36	40.56	74.00	-33.44	peak
4	2084.000	54.57	-10.63	43.94	74.00	-30.06	peak
5	2440.000	53.65	-8.80	44.85	/	/	fundamental
6	2840.000	51.63	-7.46	44.17	74.00	-29.83	peak




Test Mode:	BLE 1M	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	DC 5 V

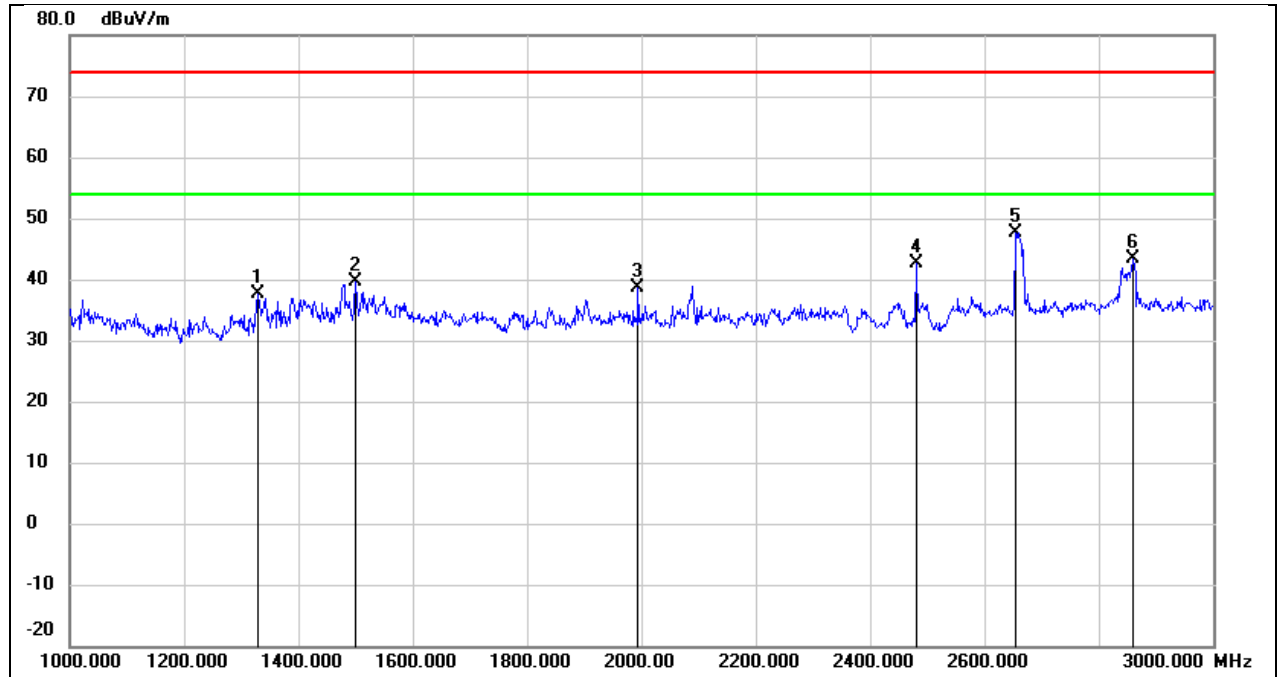

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1328.000	51.18	-13.50	37.68	74.00	-36.32	peak
2	1500.000	52.36	-12.71	39.65	74.00	-34.35	peak
3	1994.000	49.63	-11.08	38.55	74.00	-35.45	peak
4	2480.000	51.12	-8.59	42.53	/	/	fundamental
5	2654.000	55.64	-8.02	47.62	74.00	-26.38	peak
6	2860.000	50.86	-7.40	43.46	74.00	-30.54	peak


Test Mode:	BLE 1M	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	DC 5 V

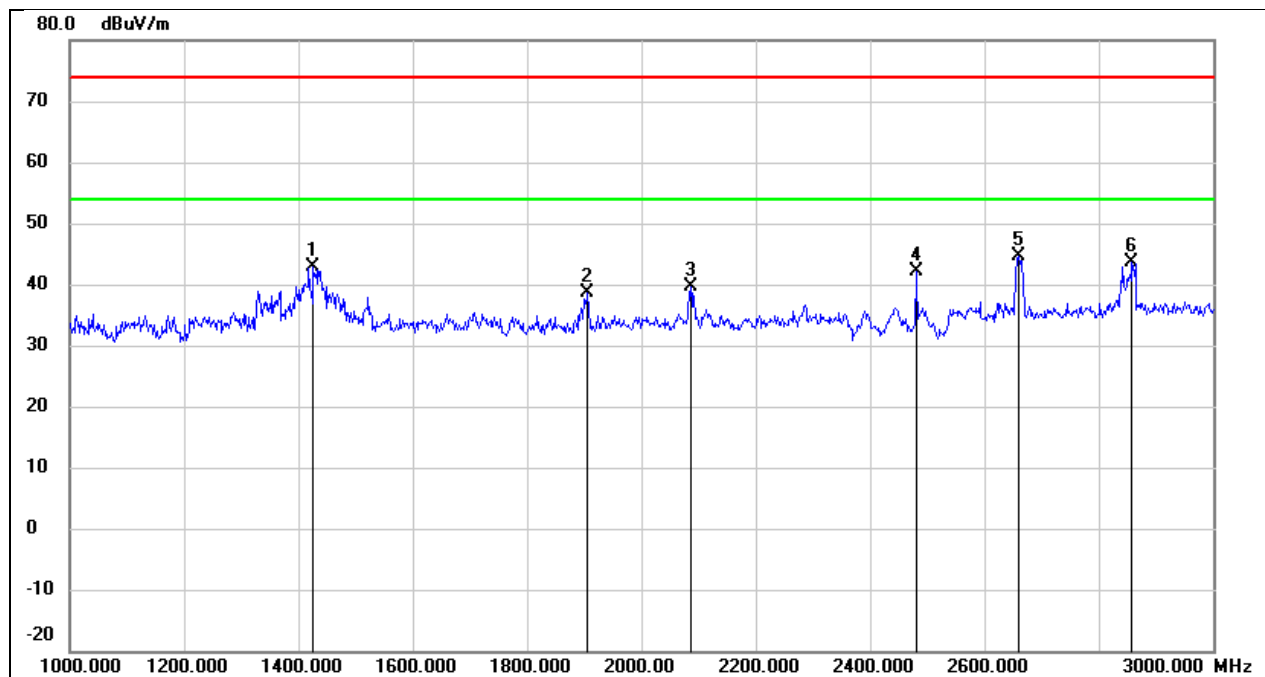

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1426.000	55.94	-13.05	42.89	74.00	-31.11	peak
2	1906.000	49.94	-11.37	38.57	74.00	-35.43	peak
3	2086.000	50.17	-10.62	39.55	74.00	-34.45	peak
4	2480.000	50.61	-8.59	42.02	/	/	fundamental
5	2660.000	52.68	-8.01	44.67	74.00	-29.33	peak
6	2858.000	50.96	-7.41	43.55	74.00	-30.45	peak


### 8.3. SPURIOUS EMISSIONS(3 GHZ~18 GHZ)

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 5 V

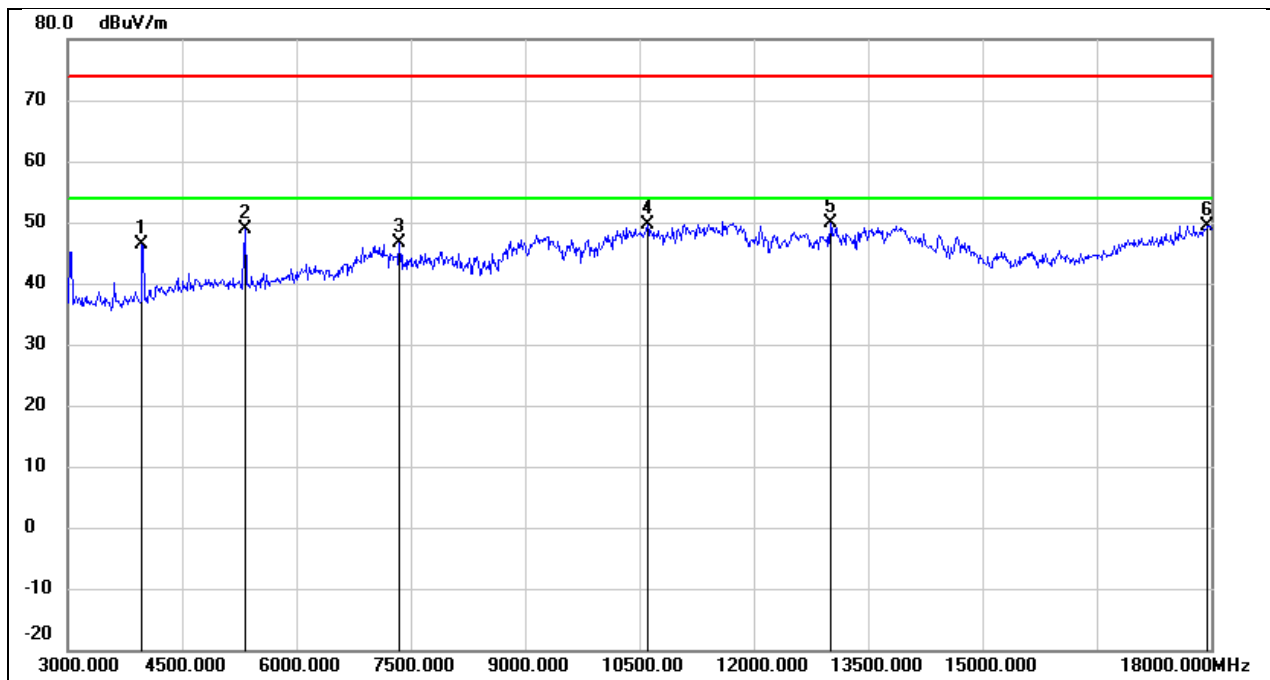


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3975.000	50.28	-3.86	46.42	74.00	-27.58	peak
2	5325.000	48.09	0.71	48.80	74.00	-25.20	peak
3	7350.000	40.13	6.44	46.57	74.00	-27.43	peak
4	10605.000	36.34	13.37	49.71	74.00	-24.29	peak
5	13005.000	31.12	18.74	49.86	74.00	-24.14	peak
6	17955.000	24.03	25.42	49.45	74.00	-24.55	peak

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	DC 5 V

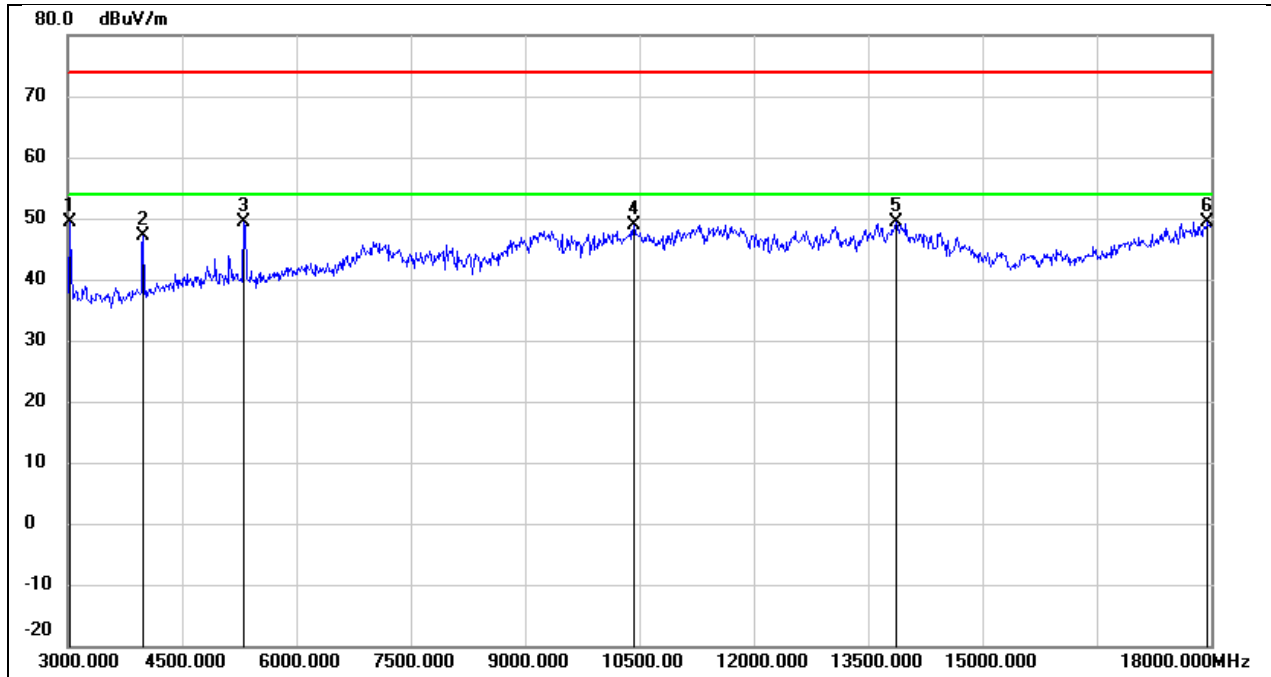


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3030.000	54.48	-5.22	49.26	74.00	-24.74	peak
2	3990.000	50.84	-3.82	47.02	74.00	-26.98	peak
3	5310.000	48.75	0.70	49.45	74.00	-24.55	peak
4	10425.000	36.11	12.84	48.95	74.00	-25.05	peak
5	13860.000	27.78	21.67	49.45	74.00	-24.55	peak
6	17955.000	23.90	25.42	49.32	74.00	-24.68	peak

Test Mode:	BLE 1M	Frequency(MHz):	2440
Polarity:	Horizontal	Test Voltage:	DC 5 V

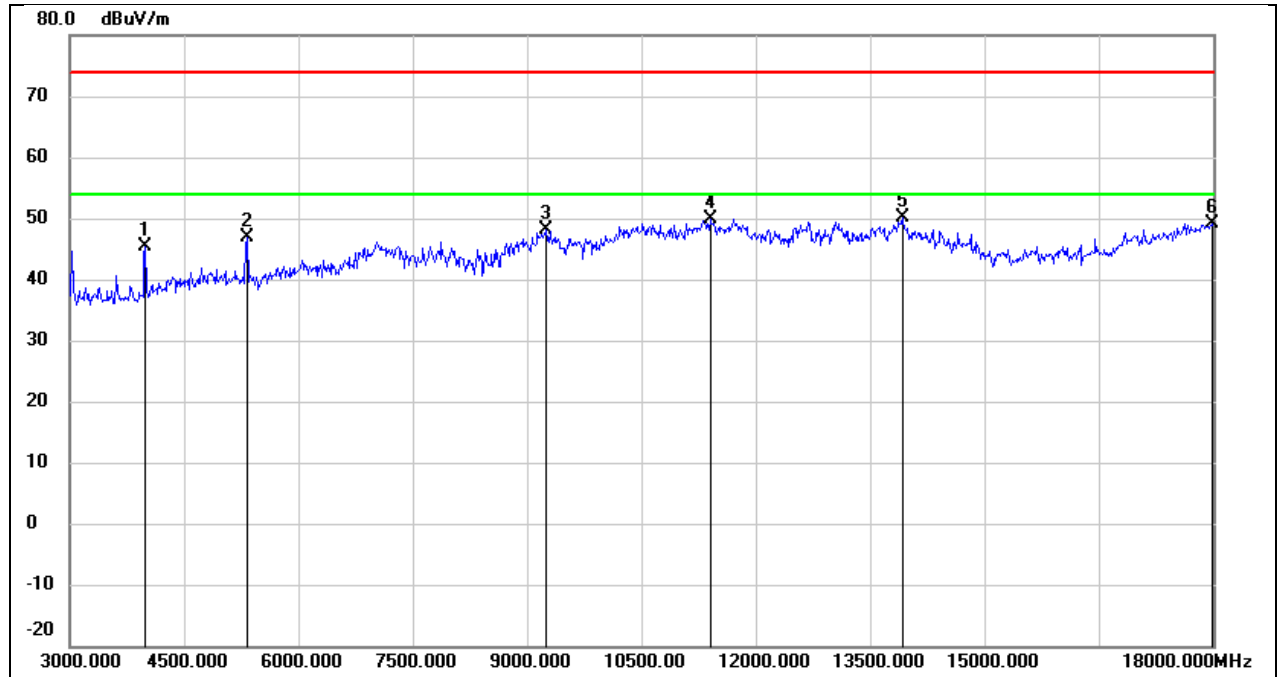


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	49.24	-3.82	45.42	74.00	-28.58	peak
2	5325.000	46.10	0.71	46.81	74.00	-27.19	peak
3	9255.000	37.59	10.59	48.18	74.00	-25.82	peak
4	11400.000	33.65	16.23	49.88	74.00	-24.12	peak
5	13920.000	28.32	21.79	50.11	74.00	-23.89	peak
6	17985.000	23.65	25.60	49.25	74.00	-24.75	peak

Test Mode:	BLE 1M	Frequency(MHz):	2440
Polarity:	Vertical	Test Voltage:	DC 5 V

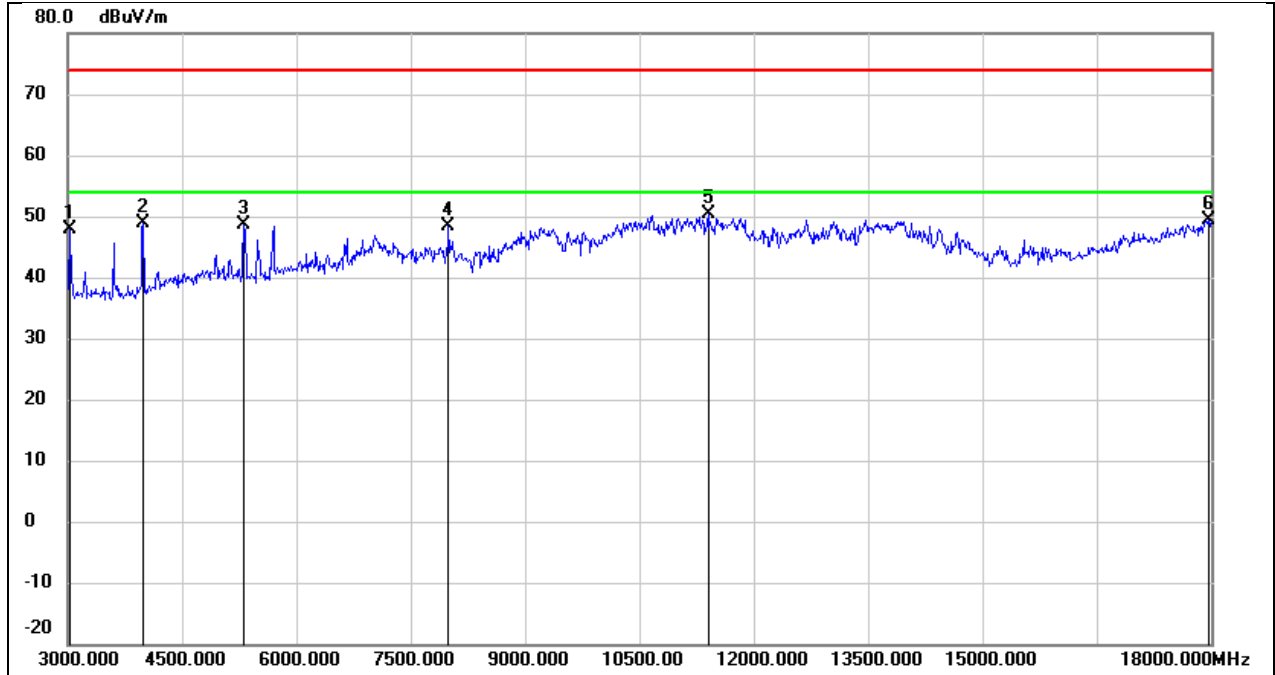


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3030.000	53.10	-5.22	47.88	74.00	-26.12	peak
2	3990.000	52.69	-3.82	48.87	74.00	-25.13	peak
3	5310.000	47.94	0.70	48.64	74.00	-25.36	peak
4	7995.000	42.15	6.31	48.46	74.00	-25.54	peak
5	11400.000	34.19	16.23	50.42	74.00	-23.58	peak
6	17970.000	23.83	25.51	49.34	74.00	-24.66	peak

Test Mode:	BLE 1M	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	DC 5 V

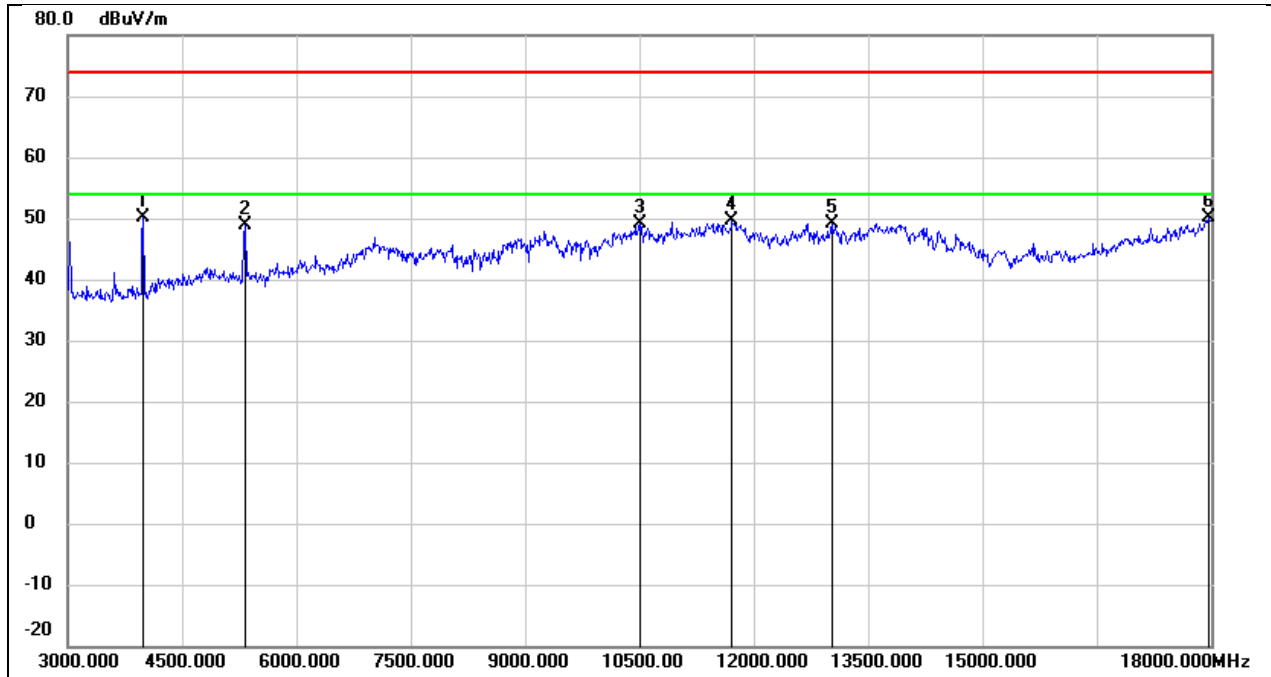

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	53.99	-3.82	50.17	74.00	-23.83	peak
2	5325.000	48.09	0.71	48.80	74.00	-25.20	peak
3	10500.000	36.05	12.99	49.04	74.00	-24.96	peak
4	11715.000	32.33	17.19	49.52	74.00	-24.48	peak
5	13020.000	30.24	18.80	49.04	74.00	-24.96	peak
6	17970.000	24.59	25.51	50.10	74.00	-23.90	peak


Test Mode:	BLE 1M	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	DC 5 V

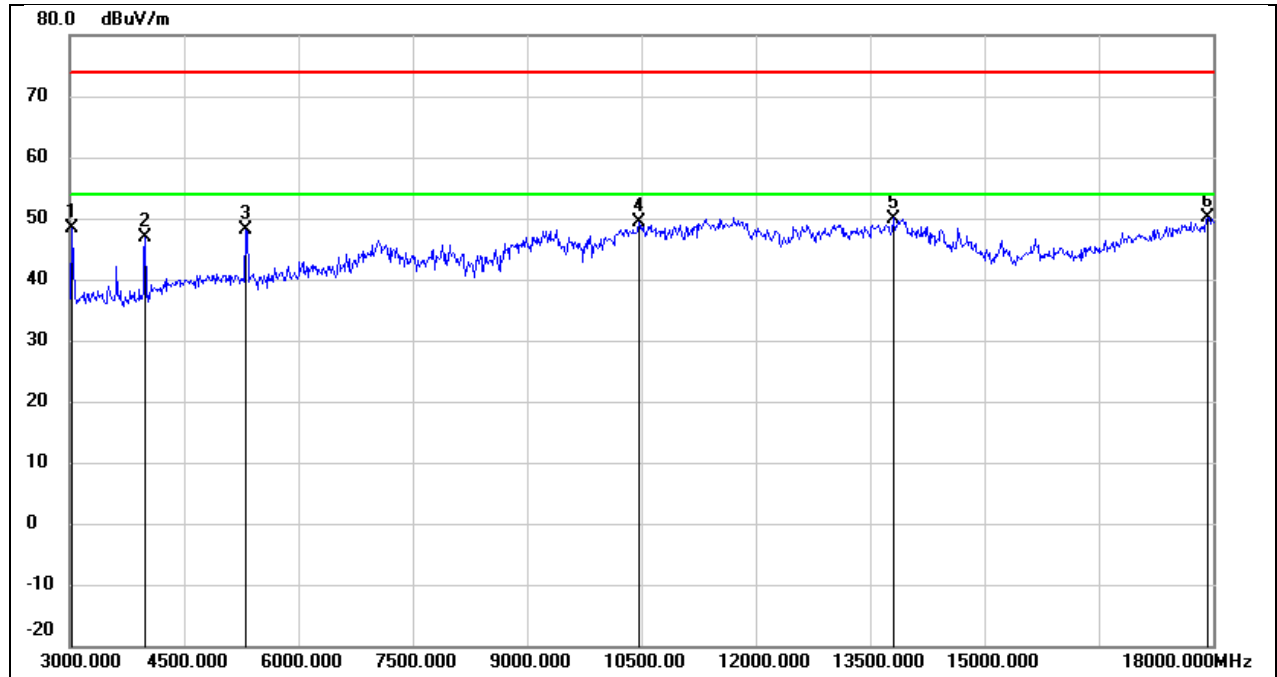

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3030.000	53.56	-5.22	48.34	74.00	-25.66	peak
2	3990.000	50.76	-3.82	46.94	74.00	-27.06	peak
3	5310.000	47.35	0.70	48.05	74.00	-25.95	peak
4	10470.000	36.37	12.93	49.30	74.00	-24.70	peak
5	13800.000	28.46	21.54	50.00	74.00	-24.00	peak
6	17925.000	24.94	25.25	50.19	74.00	-23.81	peak




Test Mode:	BLE 2M	Frequency(MHz):	2404
Polarity:	Horizontal	Test Voltage:	DC 5 V

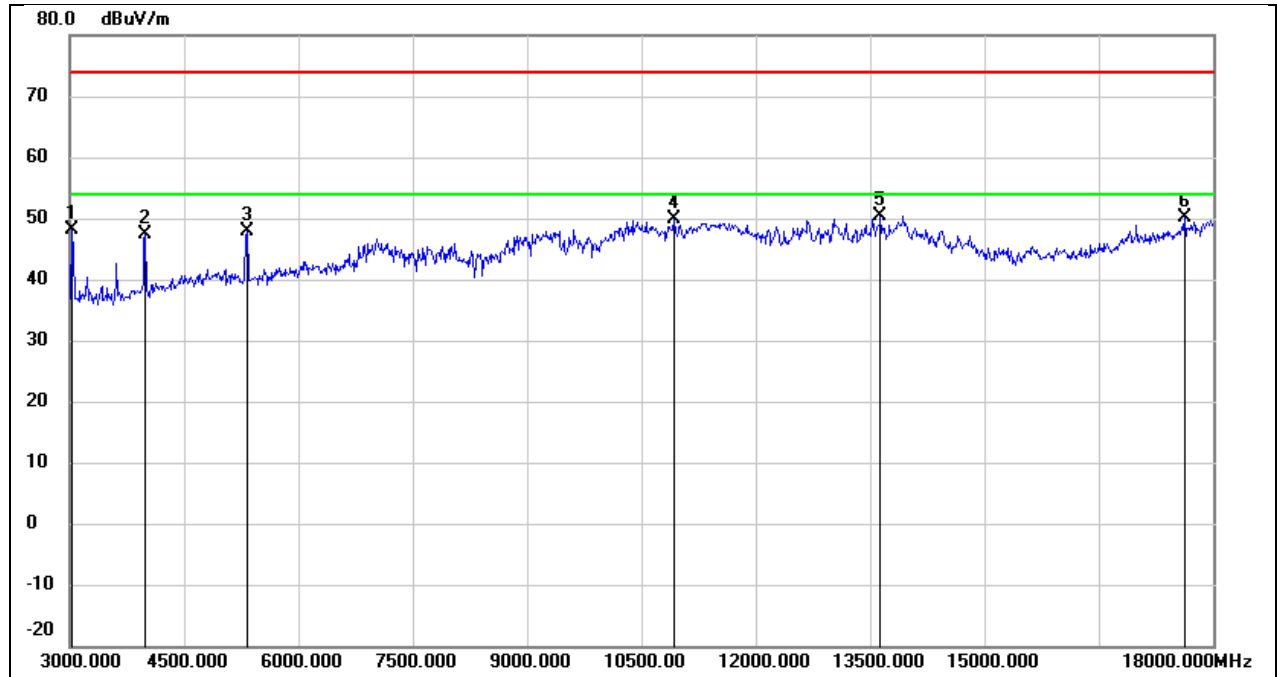


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3030.000	53.34	-5.22	48.12	74.00	-25.88	peak
2	3990.000	51.24	-3.82	47.42	74.00	-26.58	peak
3	5325.000	47.24	0.71	47.95	74.00	-26.05	peak
4	10920.000	35.42	14.49	49.91	74.00	-24.09	peak
5	13635.000	29.20	21.19	50.39	74.00	-23.61	peak
6	17625.000	26.66	23.47	50.13	74.00	-23.87	peak

Test Mode:	BLE 2M	Frequency(MHz):	2404
Polarity:	Vertical	Test Voltage:	DC 5 V

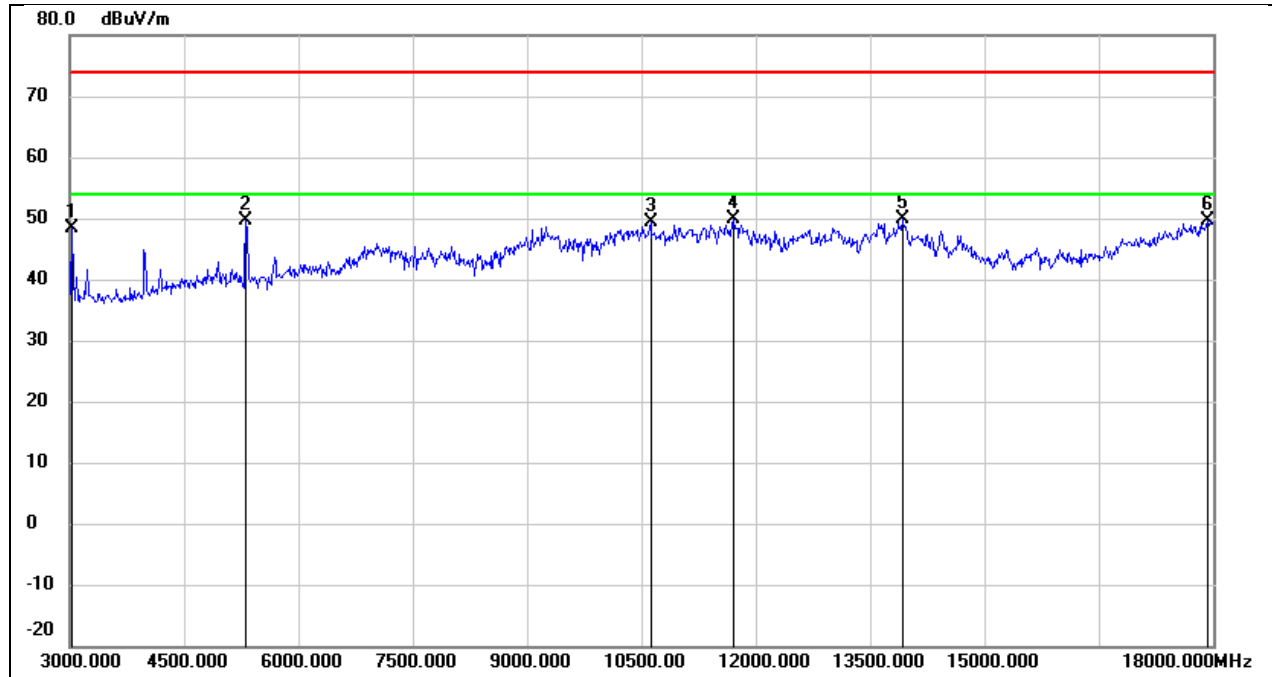


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3030.000	53.51	-5.22	48.29	74.00	-25.71	peak
2	5310.000	48.92	0.70	49.62	74.00	-24.38	peak
3	10620.000	36.02	13.42	49.44	74.00	-24.56	peak
4	11715.000	32.60	17.19	49.79	74.00	-24.21	peak
5	13920.000	28.15	21.79	49.94	74.00	-24.06	peak
6	17925.000	24.33	25.25	49.58	74.00	-24.42	peak

Test Mode:	BLE 2M	Frequency(MHz):	2440
Polarity:	Horizontal	Test Voltage:	DC 5 V

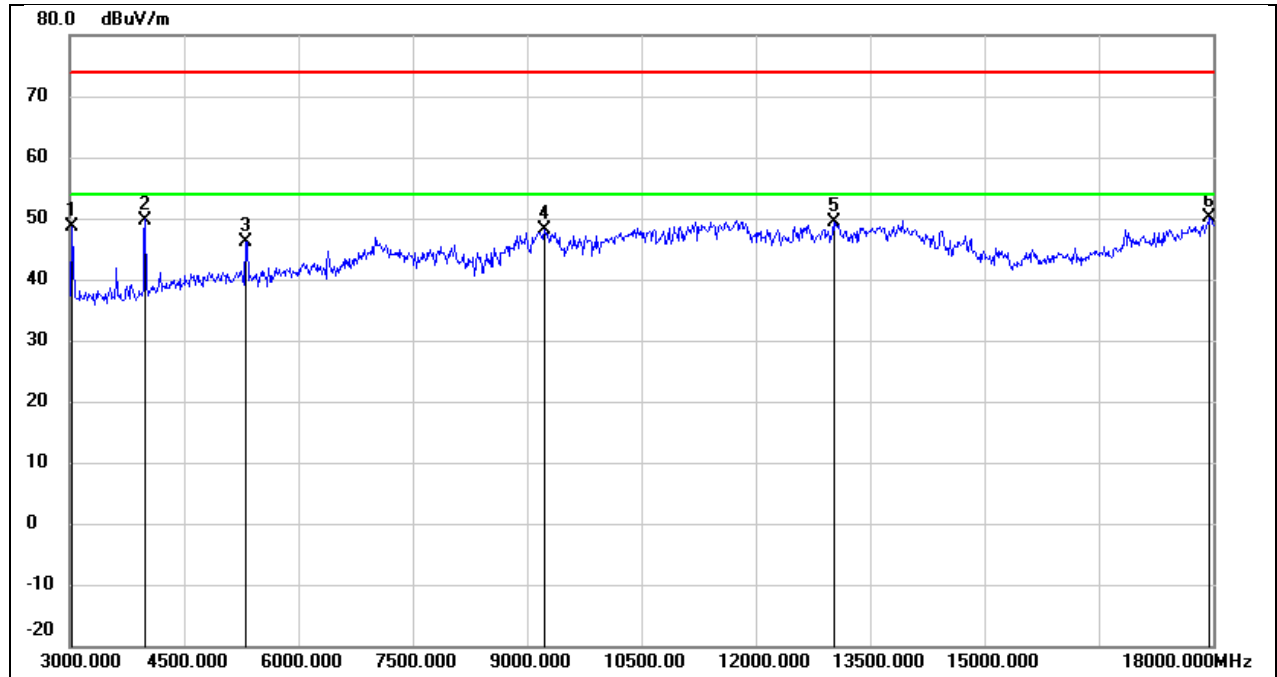


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3030.000	53.82	-5.22	48.60	74.00	-25.40	peak
2	3990.000	53.57	-3.82	49.75	74.00	-24.25	peak
3	5310.000	45.41	0.70	46.11	74.00	-27.89	peak
4	9225.000	37.62	10.58	48.20	74.00	-25.80	peak
5	13020.000	30.58	18.80	49.38	74.00	-24.62	peak
6	17955.000	24.79	25.42	50.21	74.00	-23.79	peak

Test Mode:	BLE 2M	Frequency(MHz):	2440
Polarity:	Vertical	Test Voltage:	DC 5 V

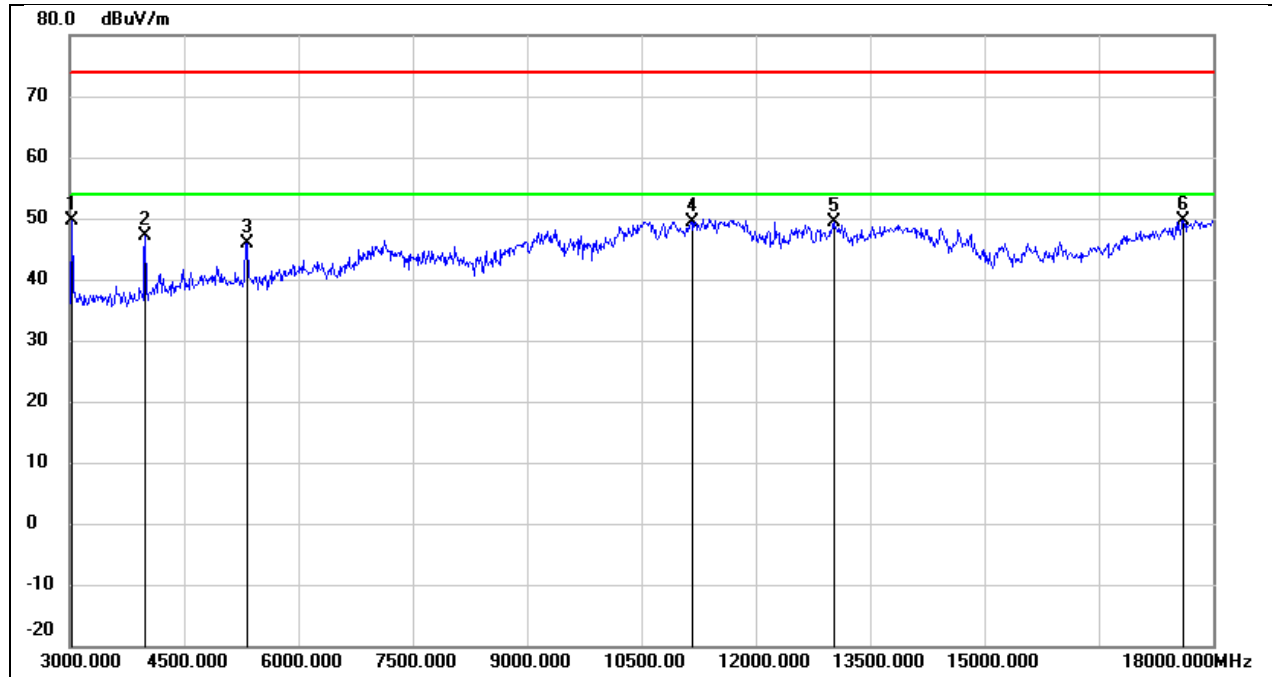


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3030.000	54.75	-5.22	49.53	74.00	-24.47	peak
2	3990.000	51.06	-3.82	47.24	74.00	-26.76	peak
3	5325.000	45.29	0.71	46.00	74.00	-28.00	peak
4	11160.000	34.14	15.36	49.50	74.00	-24.50	peak
5	13020.000	30.49	18.80	49.29	74.00	-24.71	peak
6	17610.000	26.37	23.38	49.75	74.00	-24.25	peak

Test Mode:	BLE 2M	Frequency(MHz):	2478
Polarity:	Horizontal	Test Voltage:	DC 5 V

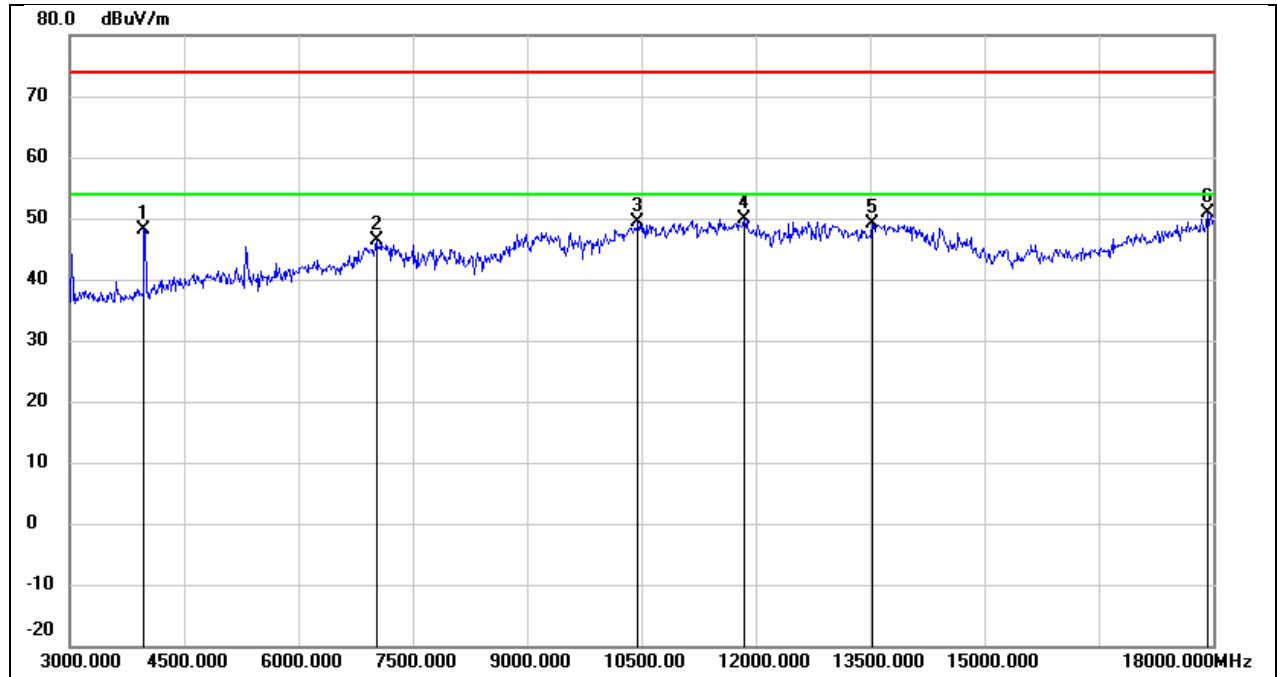


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3975.000	52.11	-3.86	48.25	74.00	-25.75	peak
2	7020.000	39.73	6.67	46.40	74.00	-27.60	peak
3	10455.000	36.50	12.91	49.41	74.00	-24.59	peak
4	11850.000	32.29	17.56	49.85	74.00	-24.15	peak
5	13530.000	28.10	20.96	49.06	74.00	-24.94	peak
6	17925.000	25.67	25.25	50.92	74.00	-23.08	peak

Test Mode:	BLE 2M	Frequency(MHz):	2478
Polarity:	Vertical	Test Voltage:	DC 5 V

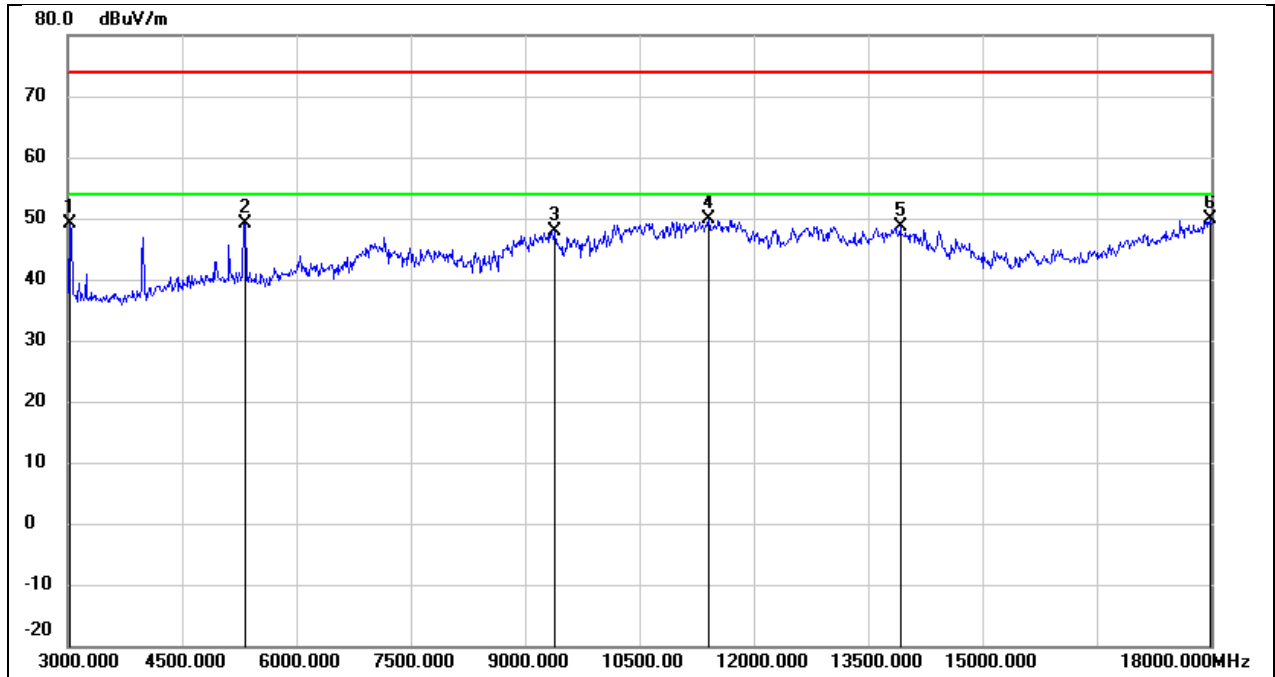


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3030.000	54.38	-5.22	49.16	74.00	-24.84	peak
2	5325.000	48.43	0.71	49.14	74.00	-24.86	peak
3	9390.000	37.33	10.64	47.97	74.00	-26.03	peak
4	11400.000	33.64	16.23	49.87	74.00	-24.13	peak
5	13920.000	26.84	21.79	48.63	74.00	-25.37	peak
6	17985.000	24.31	25.60	49.91	74.00	-24.09	peak

Test Mode:	QHS 2M	Frequency(MHz):	2404
Polarity:	Horizontal	Test Voltage:	DC 5 V

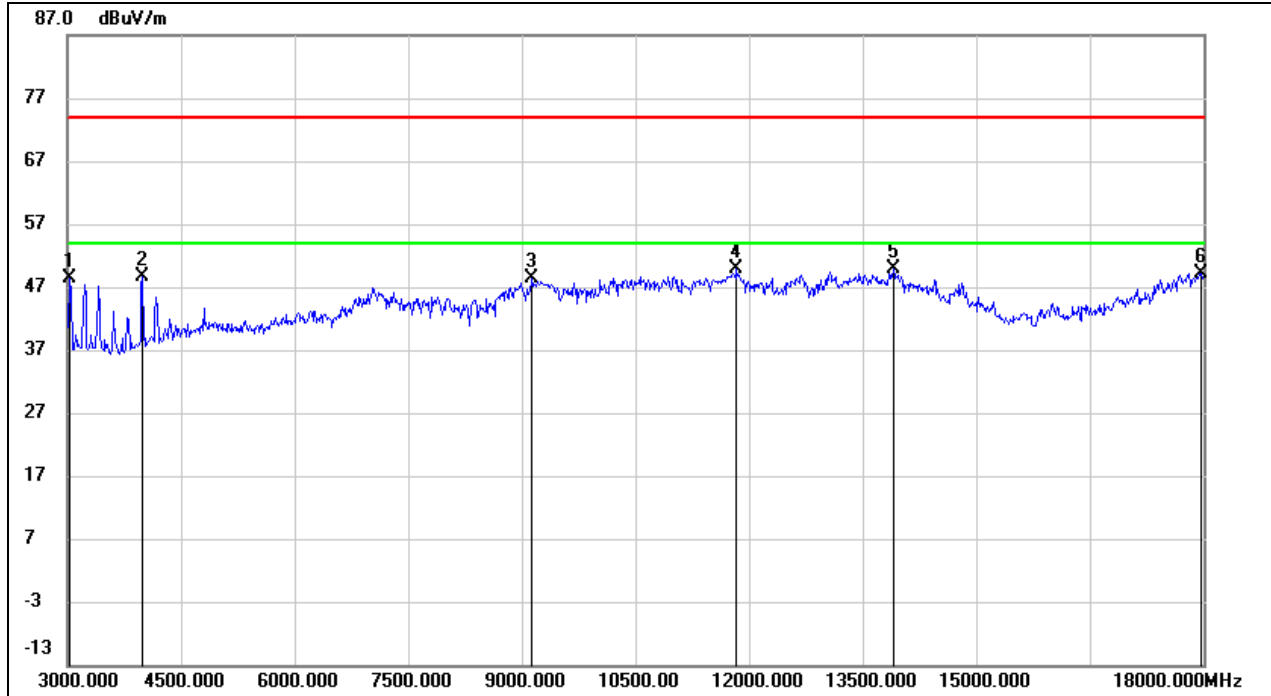

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3030.000	53.51	-5.22	48.29	74.00	-25.71	peak
2	3990.000	52.39	-3.82	48.57	74.00	-25.43	peak
3	9135.000	37.85	10.55	48.40	74.00	-25.60	peak
4	11835.000	32.47	17.51	49.98	74.00	-24.02	peak
5	13905.000	28.14	21.76	49.90	74.00	-24.10	peak
6	17970.000	23.72	25.51	49.23	74.00	-24.77	peak


Test Mode:	QHS 2M	Frequency(MHz):	2404
Polarity:	Vertical	Test Voltage:	DC 5 V

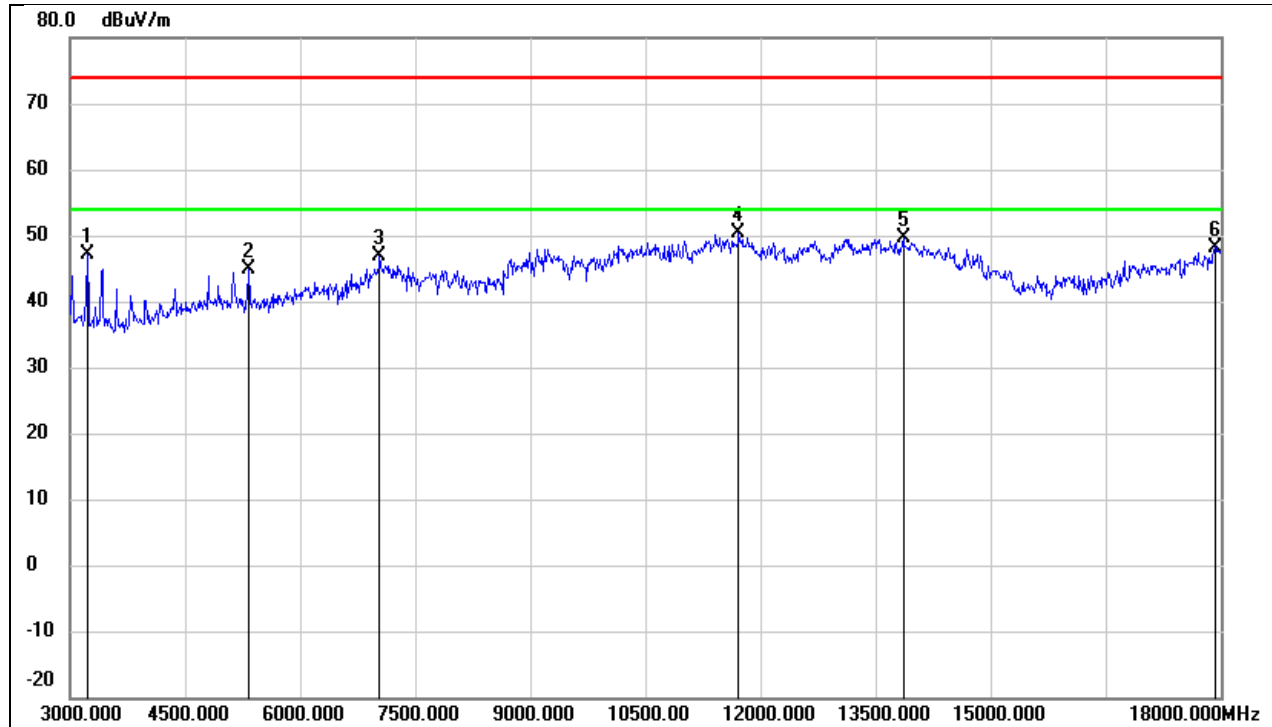

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3225.000	52.27	-5.11	47.16	74.00	-26.84	peak
2	5325.000	44.09	0.71	44.80	74.00	-29.20	peak
3	7035.000	40.18	6.67	46.85	74.00	-27.15	peak
4	11715.000	33.26	17.19	50.45	74.00	-23.55	peak
5	13860.000	27.92	21.67	49.59	74.00	-24.41	peak
6	17925.000	23.00	25.25	48.25	74.00	-25.75	peak




Test Mode:	QHS 2M	Frequency(MHz):	2440
Polarity:	Horizontal	Test Voltage:	DC 5 V

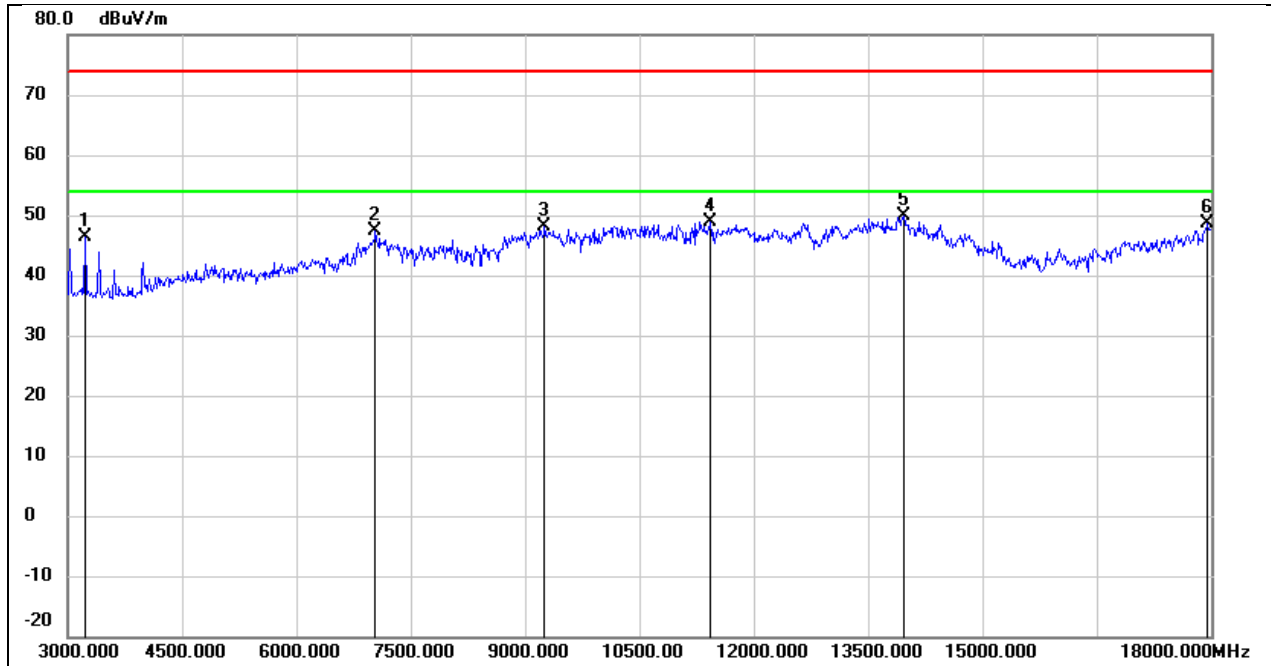


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3225.000	51.37	-5.11	46.26	74.00	-27.74	peak
2	7035.000	40.60	6.67	47.27	74.00	-26.73	peak
3	9255.000	37.50	10.59	48.09	74.00	-25.91	peak
4	11430.000	32.53	16.34	48.87	74.00	-25.13	peak
5	13965.000	28.06	21.89	49.95	74.00	-24.05	peak
6	17955.000	23.17	25.42	48.59	74.00	-25.41	peak

Test Mode:	QHS 2M	Frequency(MHz):	2440
Polarity:	Vertical	Test Voltage:	DC 5 V

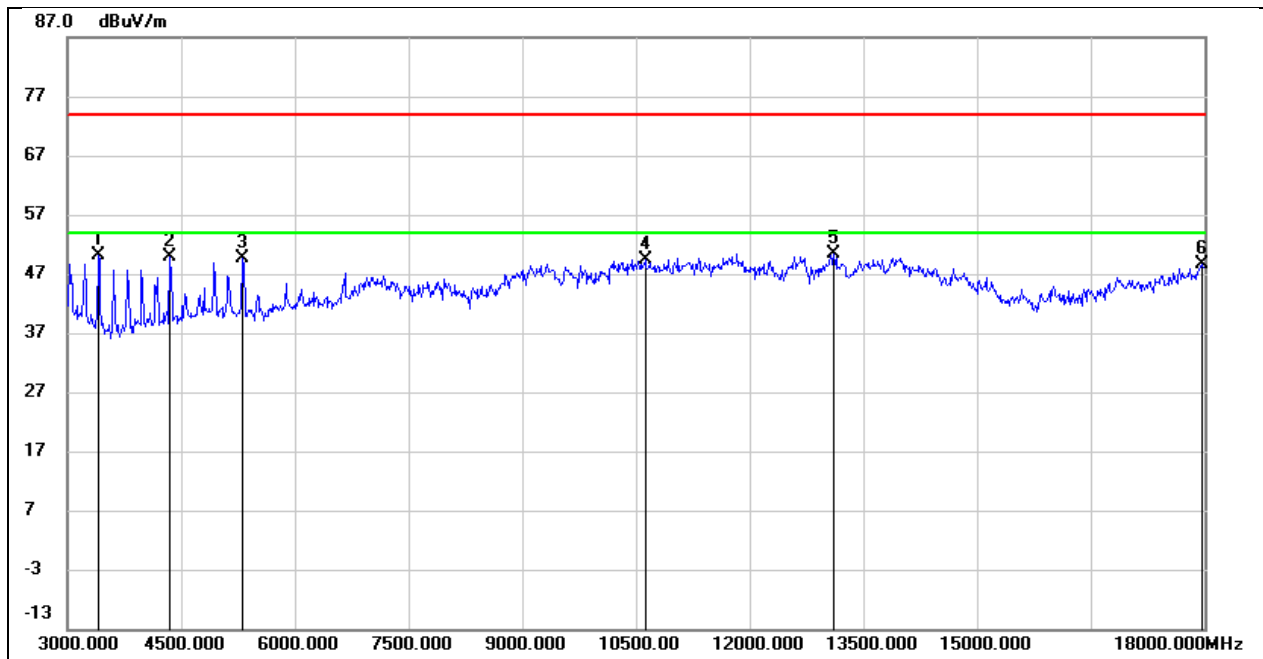


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3405.000	55.24	-5.01	50.23	74.00	-23.77	peak
2	4350.000	52.09	-2.16	49.93	74.00	-24.07	peak
3	5310.000	48.93	0.70	49.63	74.00	-24.37	peak
4	10620.000	36.02	13.42	49.44	74.00	-24.56	peak
5	13110.000	31.08	19.20	50.28	74.00	-23.72	peak
6	17970.000	23.03	25.51	48.54	74.00	-25.46	peak

Test Mode:	QHS 2M	Frequency(MHz):	2478
Polarity:	Horizontal	Test Voltage:	DC 5 V

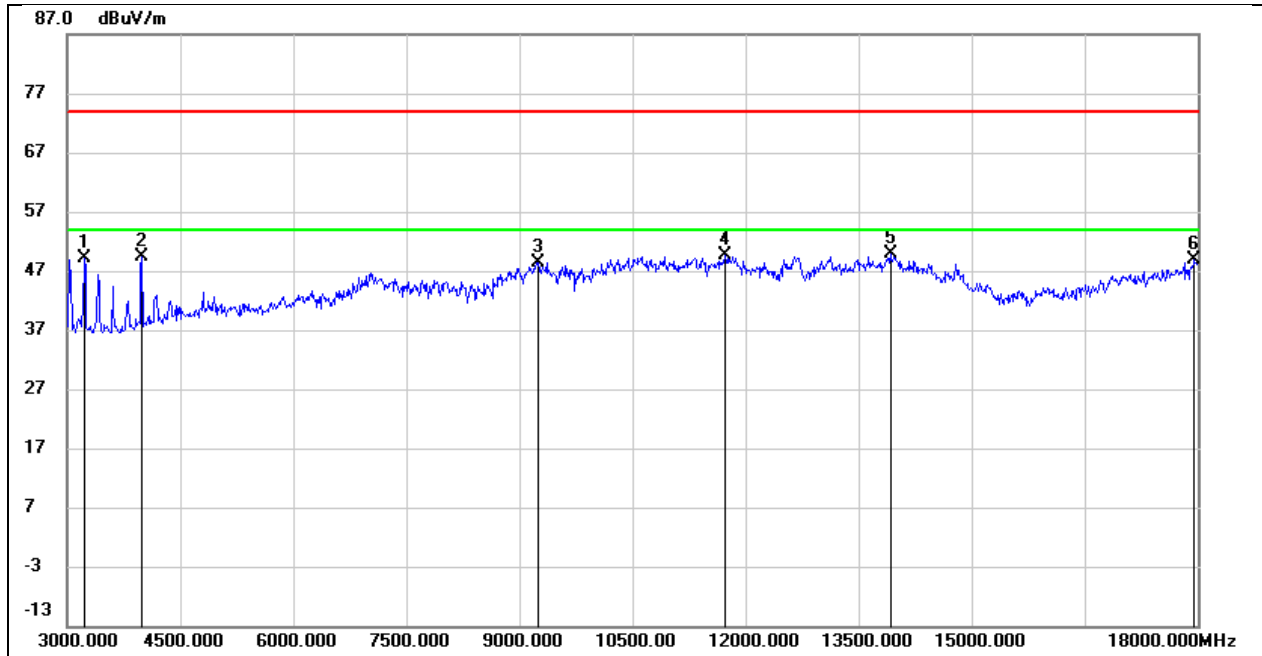


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3225.000	54.23	-5.11	49.12	74.00	-24.88	peak
2	3990.000	53.15	-3.82	49.33	74.00	-24.67	peak
3	9255.000	37.82	10.59	48.41	74.00	-25.59	peak
4	11730.000	32.33	17.22	49.55	74.00	-24.45	peak
5	13920.000	28.19	21.79	49.98	74.00	-24.02	peak
6	17955.000	23.53	25.42	48.95	74.00	-25.05	peak

Test Mode:	QHS 2M	Frequency(MHz):	2478
Polarity:	Vertical	Test Voltage:	DC 5 V

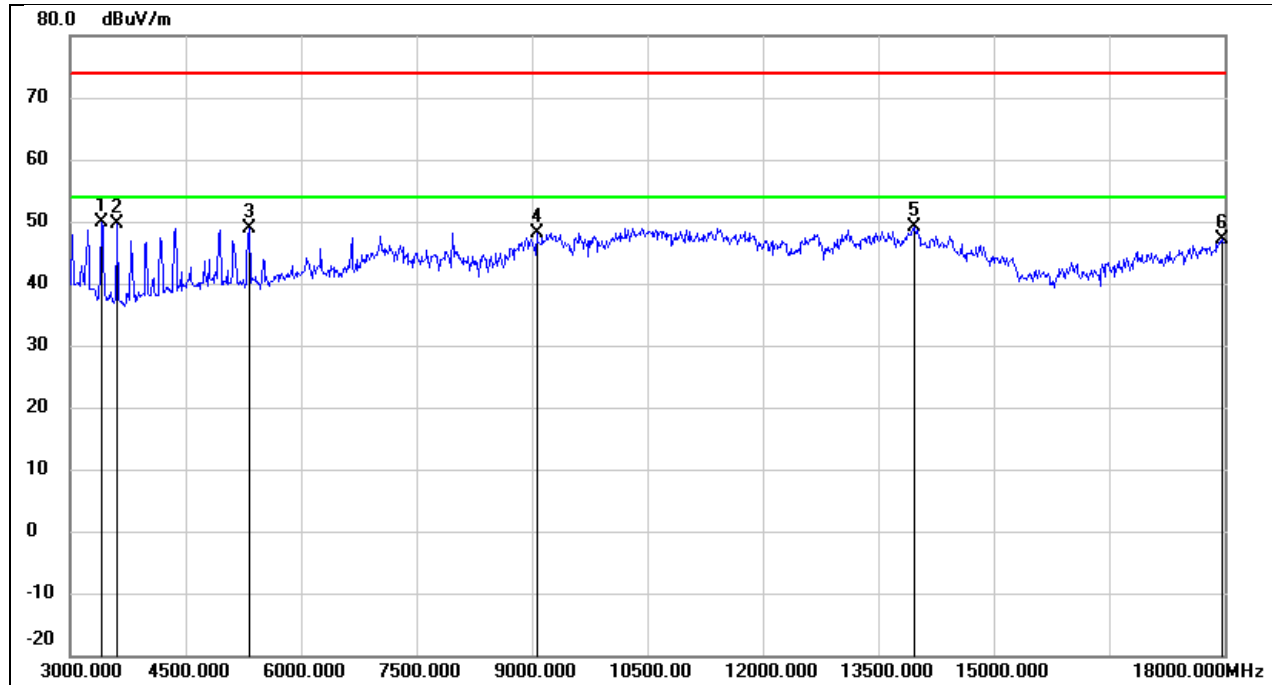


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3405.000	54.89	-5.01	49.88	74.00	-24.12	peak
2	3615.000	54.21	-4.69	49.52	74.00	-24.48	peak
3	5325.000	48.18	0.71	48.89	74.00	-25.11	peak
4	9060.000	37.74	10.51	48.25	74.00	-25.75	peak
5	13965.000	27.23	21.89	49.12	74.00	-24.88	peak
6	17970.000	21.73	25.51	47.24	74.00	-26.76	peak

Test Mode:	QHS 6M	Frequency(MHz):	2404
Polarity:	Horizontal	Test Voltage:	DC 5 V

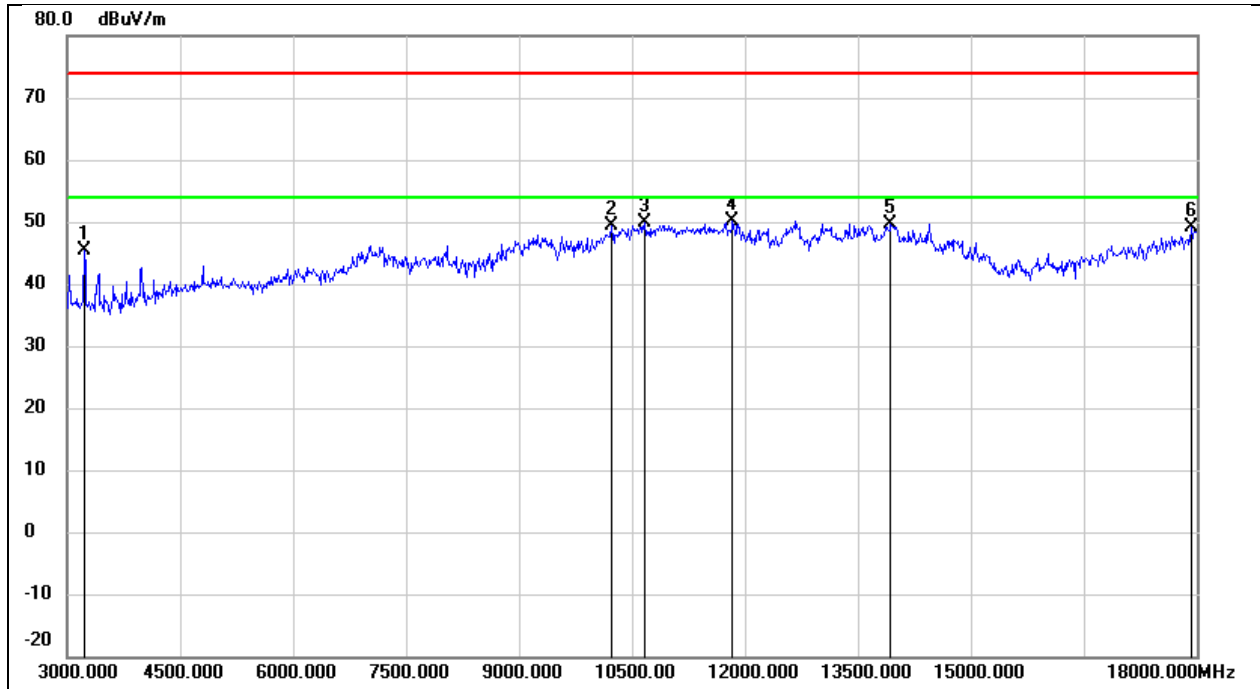


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3225.000	50.40	-5.11	45.29	74.00	-28.71	peak
2	10230.000	36.87	12.46	49.33	74.00	-24.67	peak
3	10665.000	36.25	13.58	49.83	74.00	-24.17	peak
4	11835.000	32.64	17.51	50.15	74.00	-23.85	peak
5	13935.000	27.92	21.82	49.74	74.00	-24.26	peak
6	17925.000	23.95	25.25	49.20	74.00	-24.80	peak

Test Mode:	QHS 6M	Frequency(MHz):	2404
Polarity:	Vertical	Test Voltage:	DC 5 V

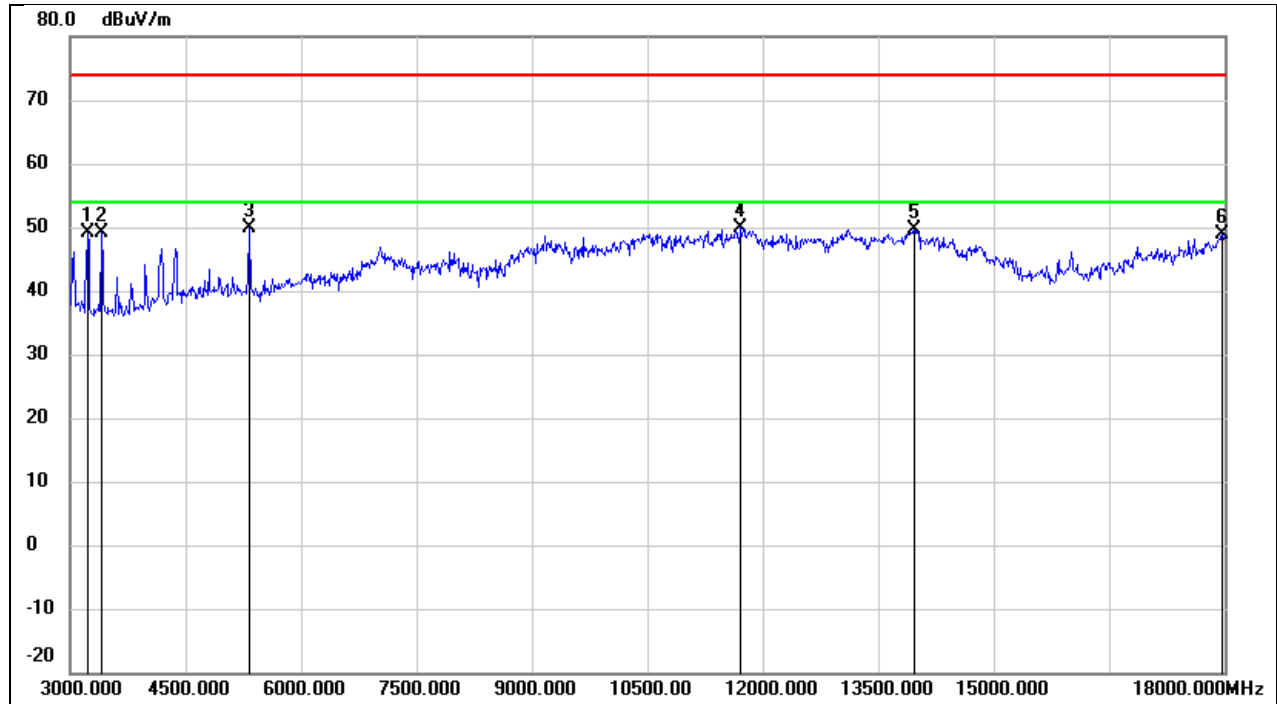


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3225.000	54.21	-5.11	49.10	74.00	-24.90	peak
2	3405.000	54.18	-5.01	49.17	74.00	-24.83	peak
3	5325.000	49.21	0.71	49.92	74.00	-24.08	peak
4	11715.000	32.81	17.19	50.00	74.00	-24.00	peak
5	13965.000	27.67	21.89	49.56	74.00	-24.44	peak
6	17970.000	23.38	25.51	48.89	74.00	-25.11	peak

Test Mode:	QHS 6M	Frequency(MHz):	2440
Polarity:	Horizontal	Test Voltage:	DC 5 V

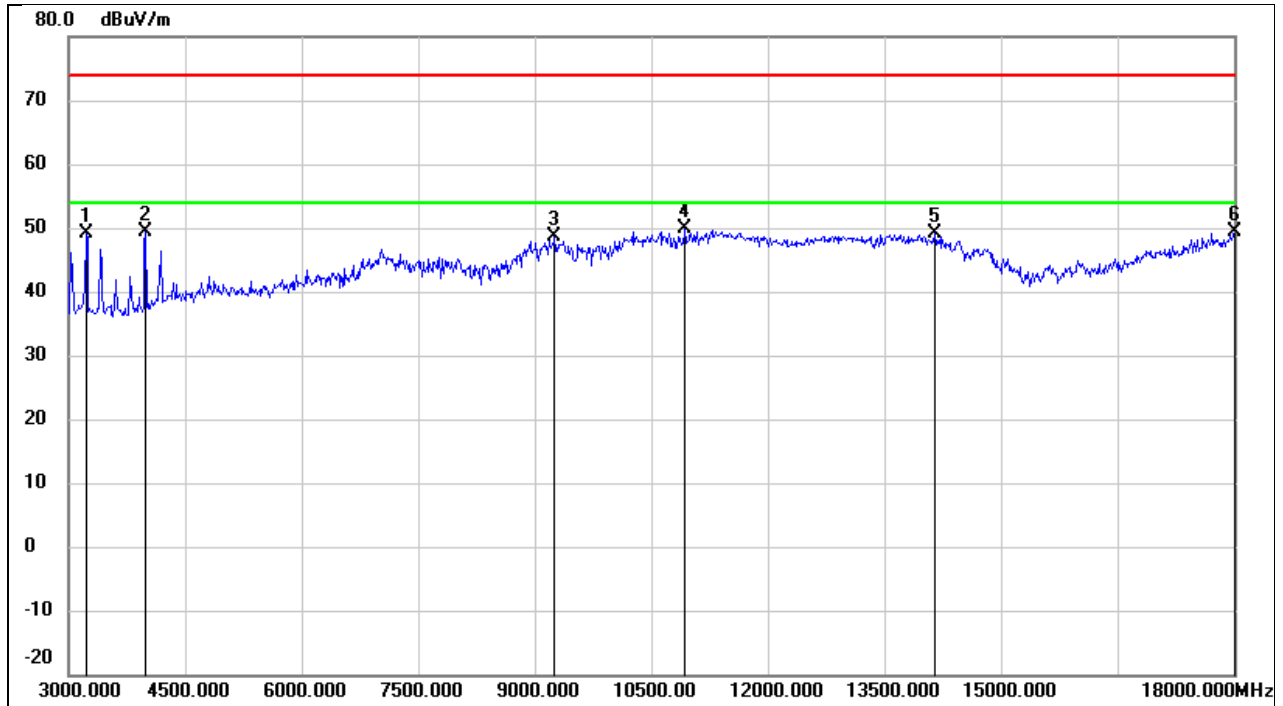

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3225.000	54.18	-5.11	49.07	74.00	-24.93	peak
2	3990.000	53.08	-3.82	49.26	74.00	-24.74	peak
3	9255.000	38.06	10.59	48.65	74.00	-25.35	peak
4	10935.000	35.45	14.54	49.99	74.00	-24.01	peak
5	14145.000	27.85	21.37	49.22	74.00	-24.78	peak
6	18000.000	23.68	25.69	49.37	74.00	-24.63	peak


Test Mode:	QHS 6M	Frequency(MHz):	2440
Polarity:	Vertical	Test Voltage:	DC 5 V

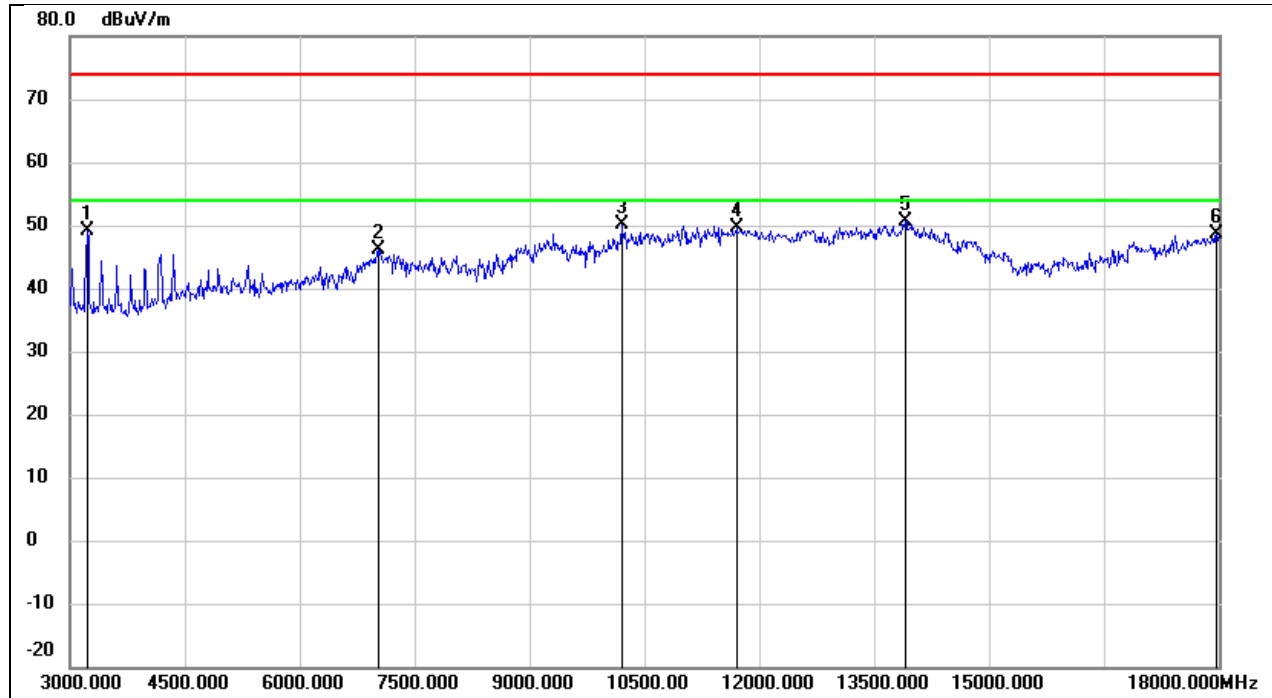

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3225.000	54.23	-5.11	49.12	74.00	-24.88	peak
2	7020.000	39.35	6.67	46.02	74.00	-27.98	peak
3	10200.000	37.63	12.40	50.03	74.00	-23.97	peak
4	11700.000	32.37	17.14	49.51	74.00	-24.49	peak
5	13905.000	28.99	21.76	50.75	74.00	-23.25	peak
6	17970.000	23.02	25.51	48.53	74.00	-25.47	peak




Test Mode:	QHS 6M	Frequency(MHz):	2478
Polarity:	Horizontal	Test Voltage:	DC 5 V

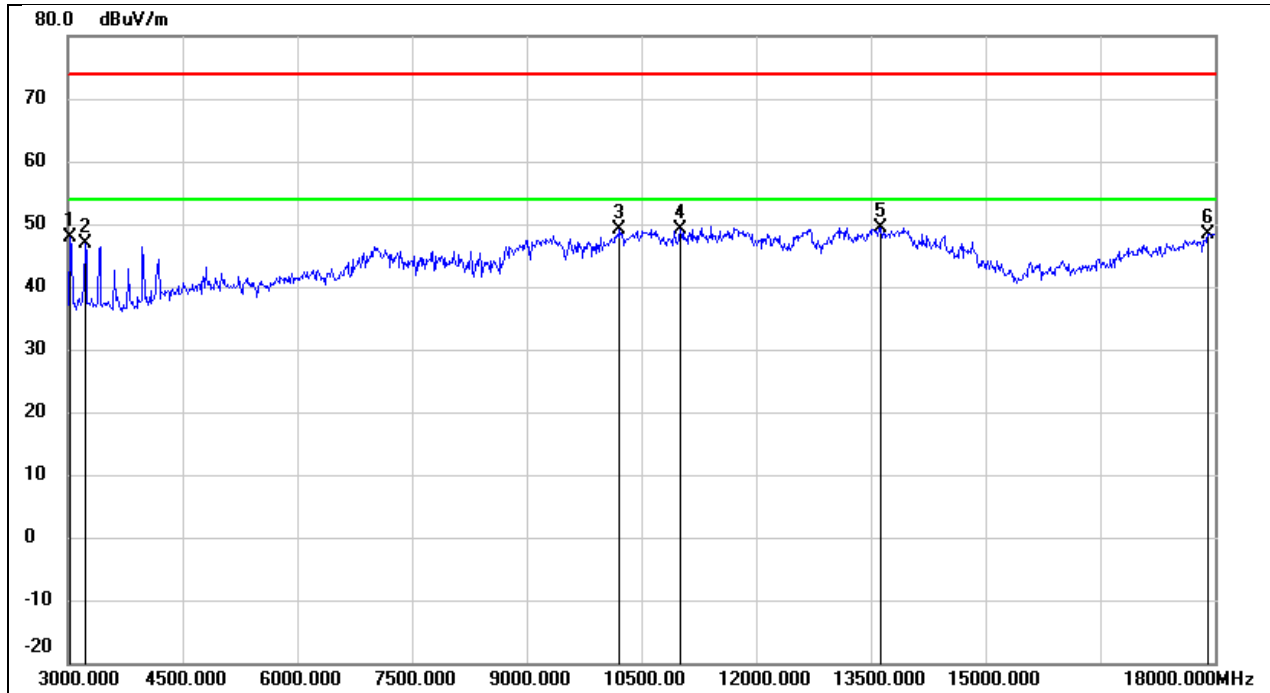

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3030.000	53.22	-5.22	48.00	74.00	-26.00	peak
2	3225.000	51.97	-5.11	46.86	74.00	-27.14	peak
3	10215.000	36.71	12.43	49.14	74.00	-24.86	peak
4	11010.000	34.37	14.81	49.18	74.00	-24.82	peak
5	13620.000	28.34	21.15	49.49	74.00	-24.51	peak
6	17910.000	23.31	25.16	48.47	74.00	-25.53	peak


Test Mode:	QHS 6M	Frequency(MHz):	2478
Polarity:	Vertical	Test Voltage:	DC 5 V

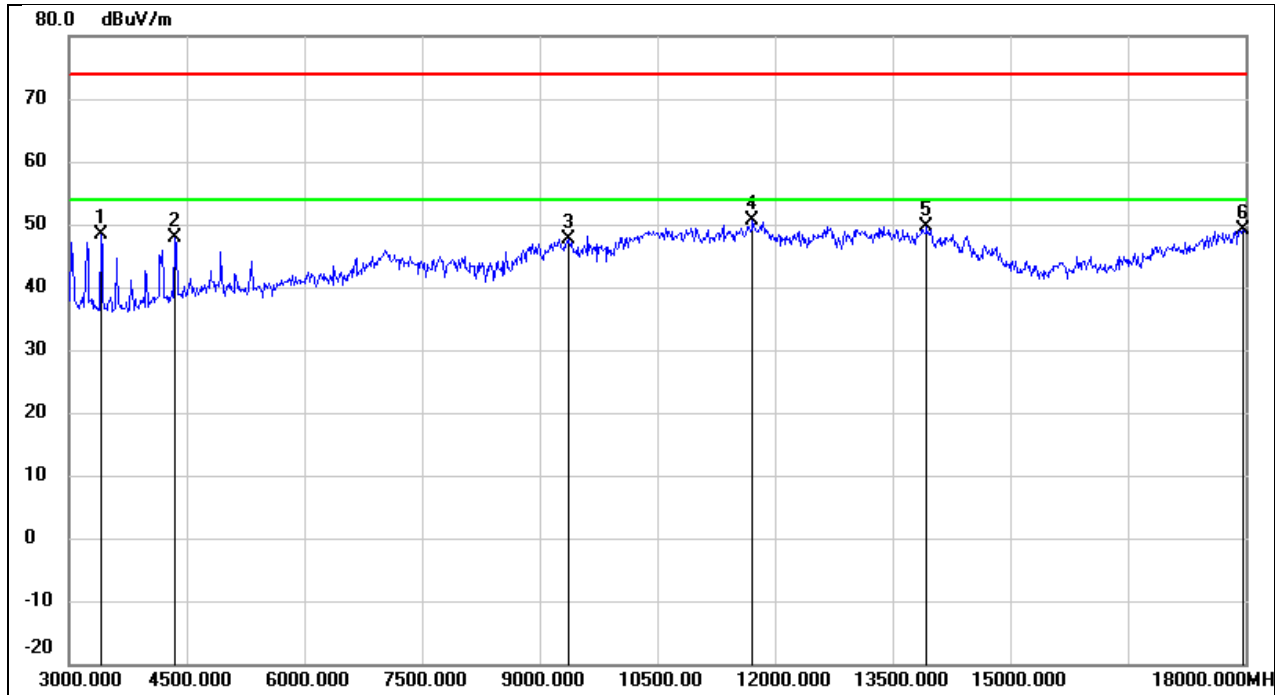

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3405.000	53.46	-5.01	48.45	74.00	-25.55	peak
2	4350.000	50.08	-2.16	47.92	74.00	-26.08	peak
3	9375.000	37.02	10.64	47.66	74.00	-26.34	peak
4	11715.000	33.37	17.19	50.56	74.00	-23.44	peak
5	13935.000	27.79	21.82	49.61	74.00	-24.39	peak
6	17970.000	23.69	25.51	49.20	74.00	-24.80	peak


### 8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 5 V

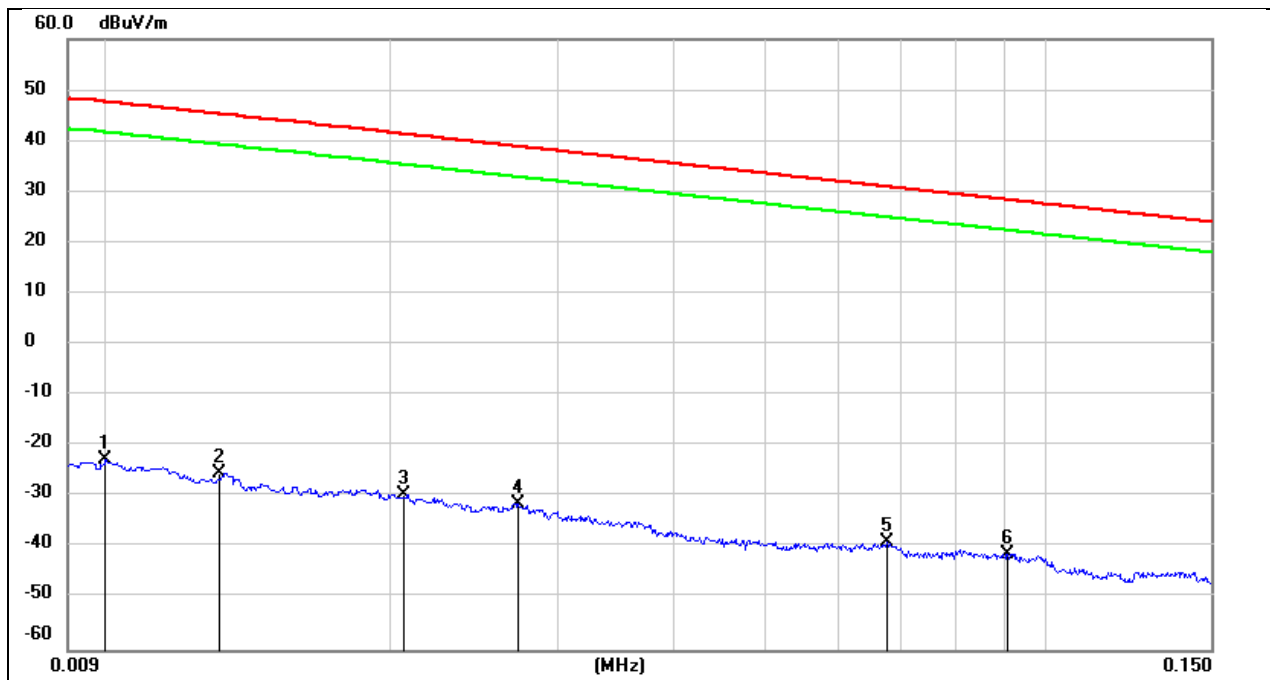


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0100	78.72	-101.40	-22.68	47.60	-70.28	peak
2	0.0131	75.97	-101.38	-25.41	45.25	-70.66	peak
3	0.0206	71.92	-101.35	-29.43	41.32	-70.75	peak
4	0.0273	69.99	-101.38	-31.39	38.88	-70.27	peak
5	0.0675	62.64	-101.56	-38.92	31.02	-69.94	peak
6	0.0911	60.61	-101.72	-41.11	28.41	-69.52	peak

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 5 V

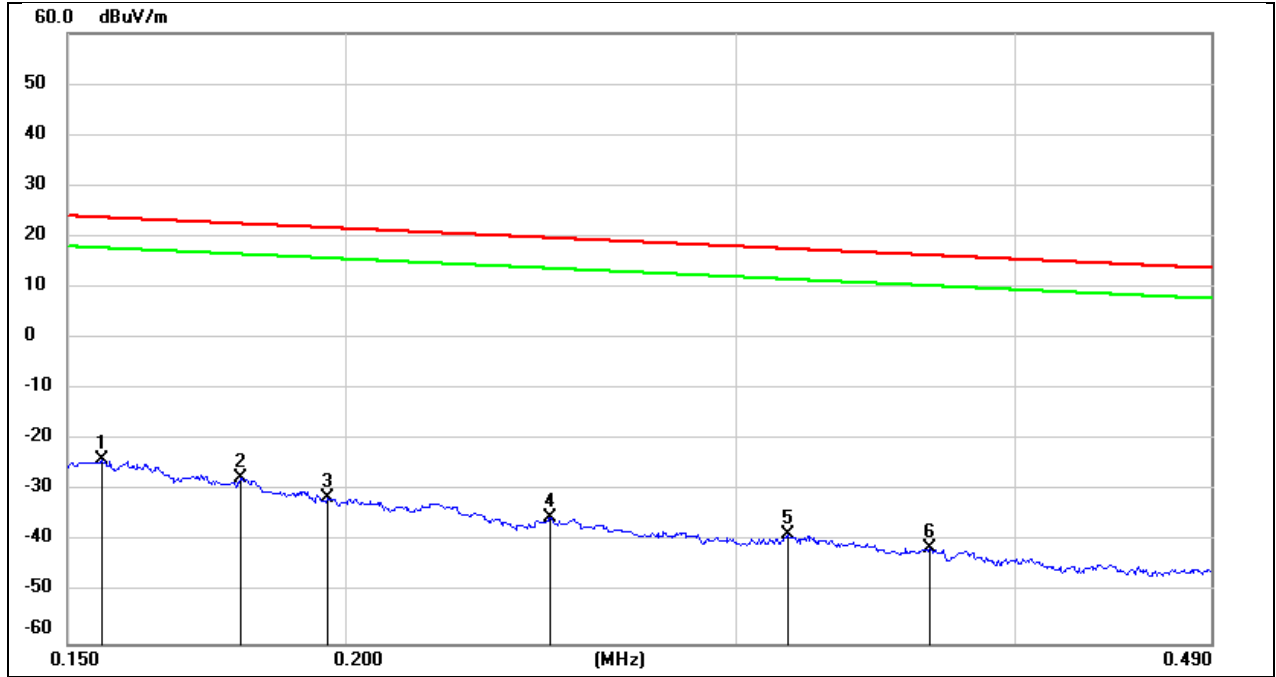

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1554	77.77	-101.65	-23.88	23.77	-47.65	peak
2	0.1794	74.27	-101.68	-27.41	22.53	-49.94	peak
3	0.1962	70.29	-101.71	-31.42	21.75	-53.17	peak
4	0.2472	66.45	-101.80	-35.35	19.74	-55.09	peak
5	0.3163	63.20	-101.87	-38.67	17.60	-56.27	peak
6	0.3662	60.58	-101.93	-41.35	16.33	-57.68	peak


Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 5 V

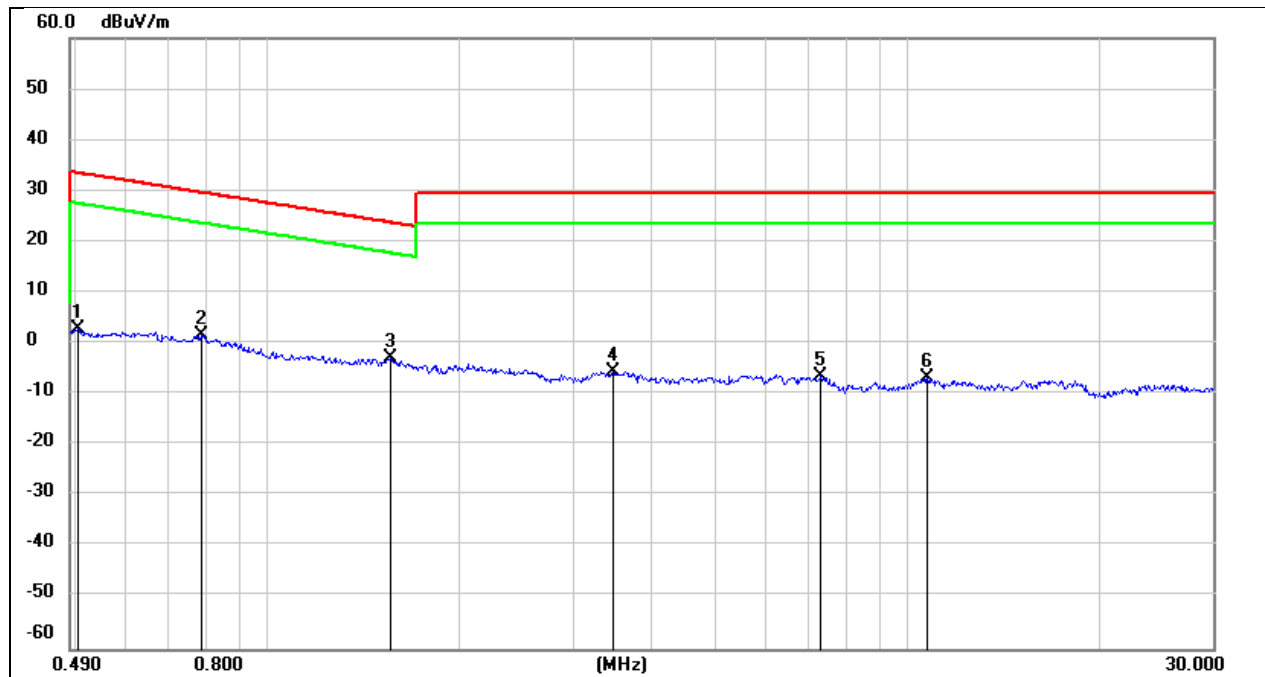

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.5039	64.93	-62.07	2.86	33.56	-30.70	peak
2	0.7861	63.83	-62.14	1.69	29.69	-28.00	peak
3	1.5564	59.18	-62.02	-2.84	23.76	-26.60	peak
4	3.4704	55.85	-61.46	-5.61	29.54	-35.15	peak
5	7.3361	54.58	-61.17	-6.59	29.54	-36.13	peak
6	10.7299	53.98	-60.83	-6.85	29.54	-36.39	peak


### 8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 5 V

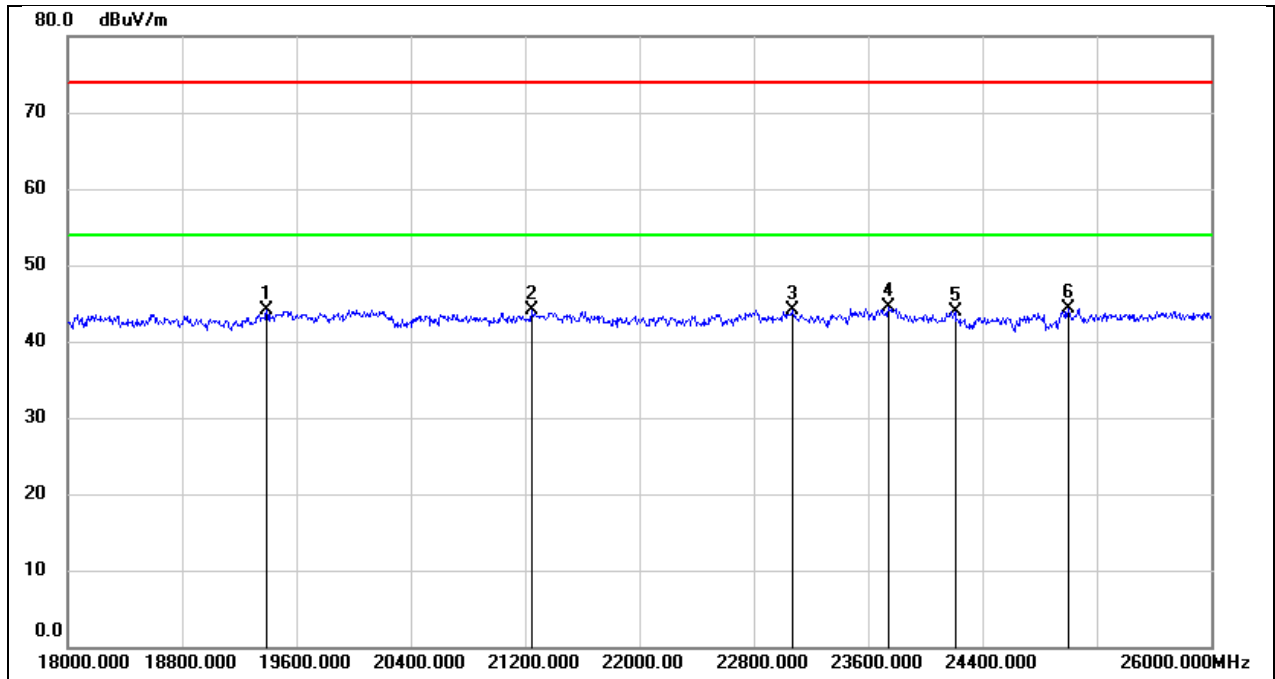

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	19392.000	49.62	-5.57	44.05	74.00	-29.95	peak
2	21248.000	48.79	-4.77	44.02	74.00	-29.98	peak
3	23072.000	47.52	-3.42	44.10	74.00	-29.90	peak
4	23744.000	47.65	-3.20	44.45	74.00	-29.55	peak
5	24208.000	46.71	-2.81	43.90	74.00	-30.10	peak
6	25000.000	46.36	-2.10	44.26	74.00	-29.74	peak


Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	DC 5 V

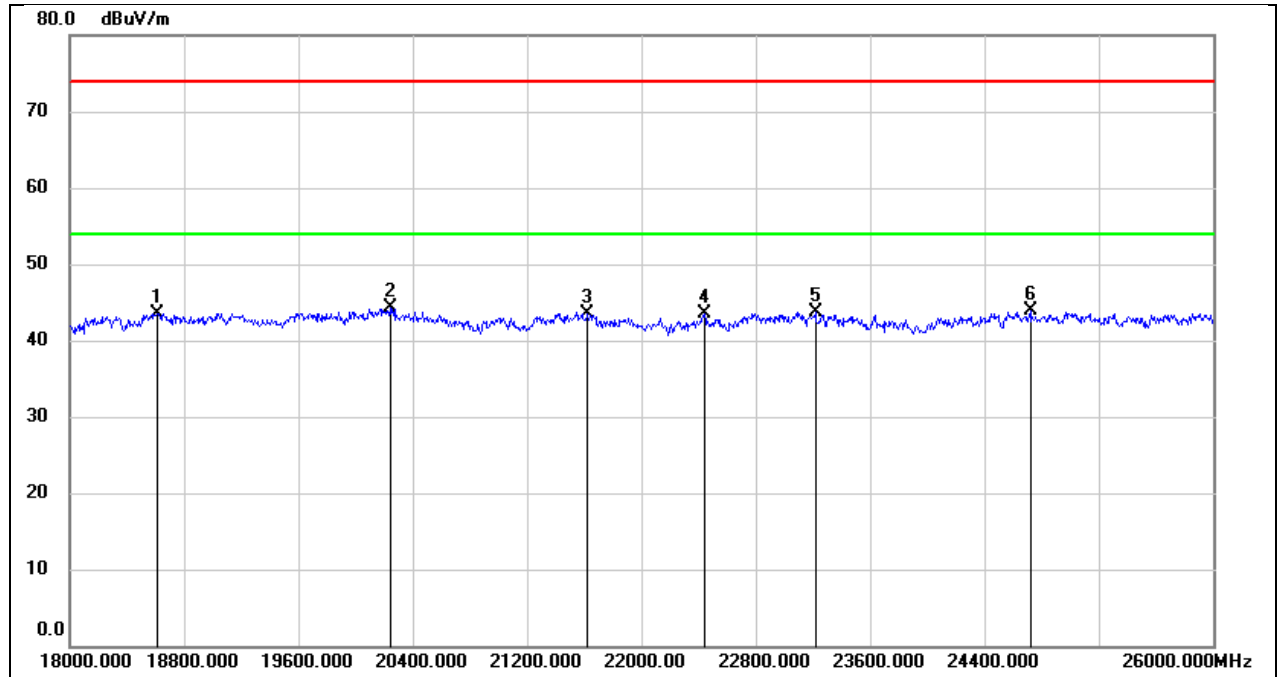

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18616.000	48.89	-5.34	43.55	74.00	-30.45	peak
2	20240.000	49.82	-5.61	44.21	74.00	-29.79	peak
3	21624.000	48.01	-4.51	43.50	74.00	-30.50	peak
4	22440.000	47.38	-3.96	43.42	74.00	-30.58	peak
5	23216.000	47.01	-3.38	43.63	74.00	-30.37	peak
6	24720.000	46.22	-2.33	43.89	74.00	-30.11	peak

## 8.6. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)


Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 5 V

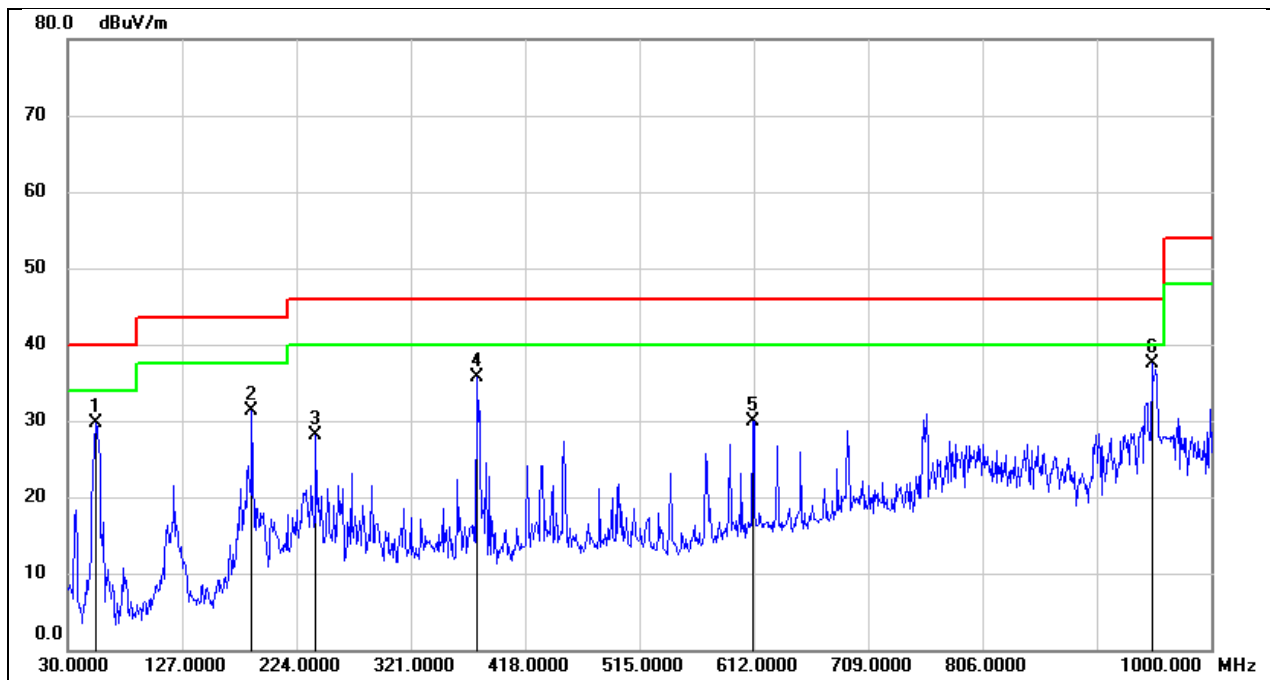

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	53.2800	49.77	-20.00	29.77	40.00	-10.23	QP
2	186.1700	47.38	-16.01	31.37	43.50	-12.13	QP
3	240.4900	45.96	-17.88	28.08	46.00	-17.92	QP
4	377.2600	48.21	-12.50	35.71	46.00	-10.29	QP
5	611.0300	39.00	-9.00	30.00	46.00	-16.00	QP
6	949.5600	42.05	-4.61	37.44	46.00	-8.56	QP



Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	DC 5 V

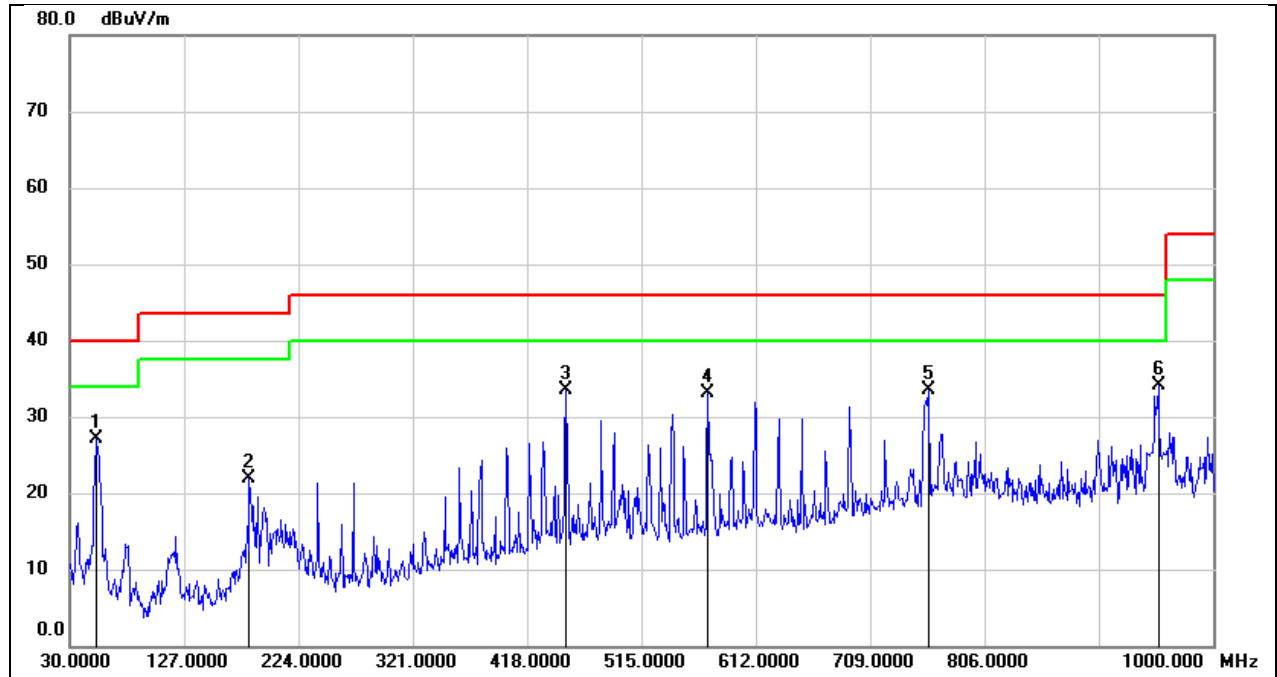

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	52.3100	47.10	-20.03	27.07	40.00	-12.93	QP
2	182.2899	37.79	-15.92	21.87	43.50	-21.63	QP
3	450.9800	44.90	-11.36	33.54	46.00	-12.46	QP
4	571.2600	42.80	-9.71	33.09	46.00	-12.91	QP
5	758.4699	40.02	-6.54	33.48	46.00	-12.52	QP
6	953.4400	38.58	-4.53	34.05	46.00	-11.95	QP

## 9. ANTENNA REQUIREMENT

### REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### DESCRIPTION

Pass

## 10. AC POWER LINE CONDUCTED EMISSION

### LIMITS

Please refer to CFR 47 FCC §15.207 (a)


FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

### TEST PROCEDURE

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

### TEST SETUP

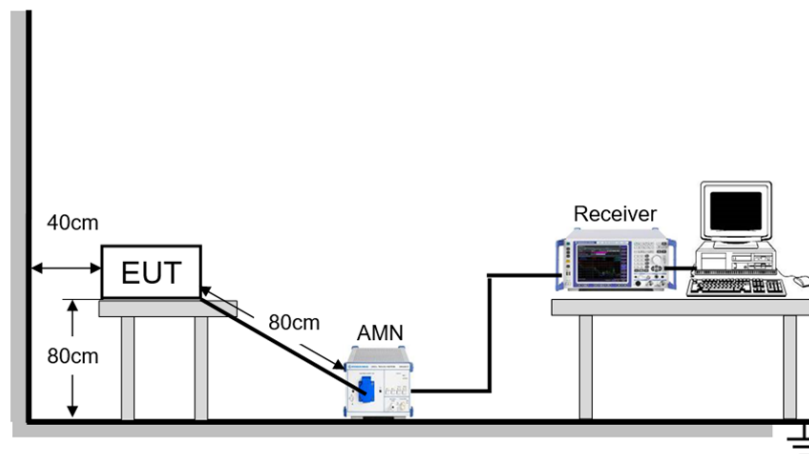

### TEST ENVIRONMENT


Temperature	21.3°C	Relative Humidity	53.4%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz

### TEST DATE / ENGINEER

Test Date	December 28, 2023	Test By	Mason Wang
-----------	-------------------	---------	------------

**TEST RESULTS**

Test Mode:	BLE 1M	Frequency(MHz):	2402
Line:	Line		

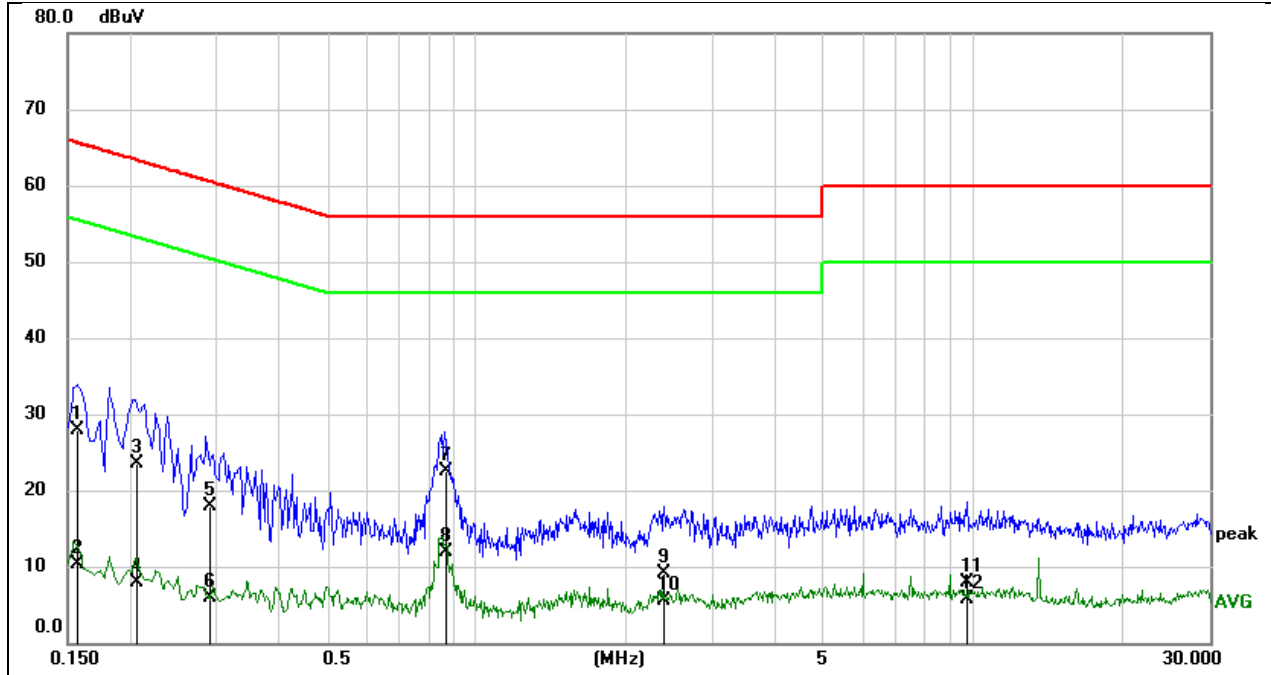


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1558	18.28	9.59	27.87	65.68	-37.81	QP
2	0.1558	0.73	9.59	10.32	55.68	-45.36	AVG
3	0.2068	13.96	9.59	23.55	63.33	-39.78	QP
4	0.2068	-1.67	9.59	7.92	53.33	-45.41	AVG
5	0.2906	8.30	9.59	17.89	60.51	-42.62	QP
6	0.2906	-3.72	9.59	5.87	50.51	-44.64	AVG
7	0.8705	12.85	9.60	22.45	56.00	-33.55	QP
8	0.8705	2.37	9.60	11.97	46.00	-34.03	AVG
9	2.3919	-0.59	9.65	9.06	56.00	-46.94	QP
10	2.3919	-4.15	9.65	5.50	46.00	-40.50	AVG
11	9.7346	-1.76	9.72	7.96	60.00	-52.04	QP
12	9.7346	-4.00	9.72	5.72	50.00	-44.28	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	BLE 1M	Frequency(MHz):	2402
Line:	Neutral		

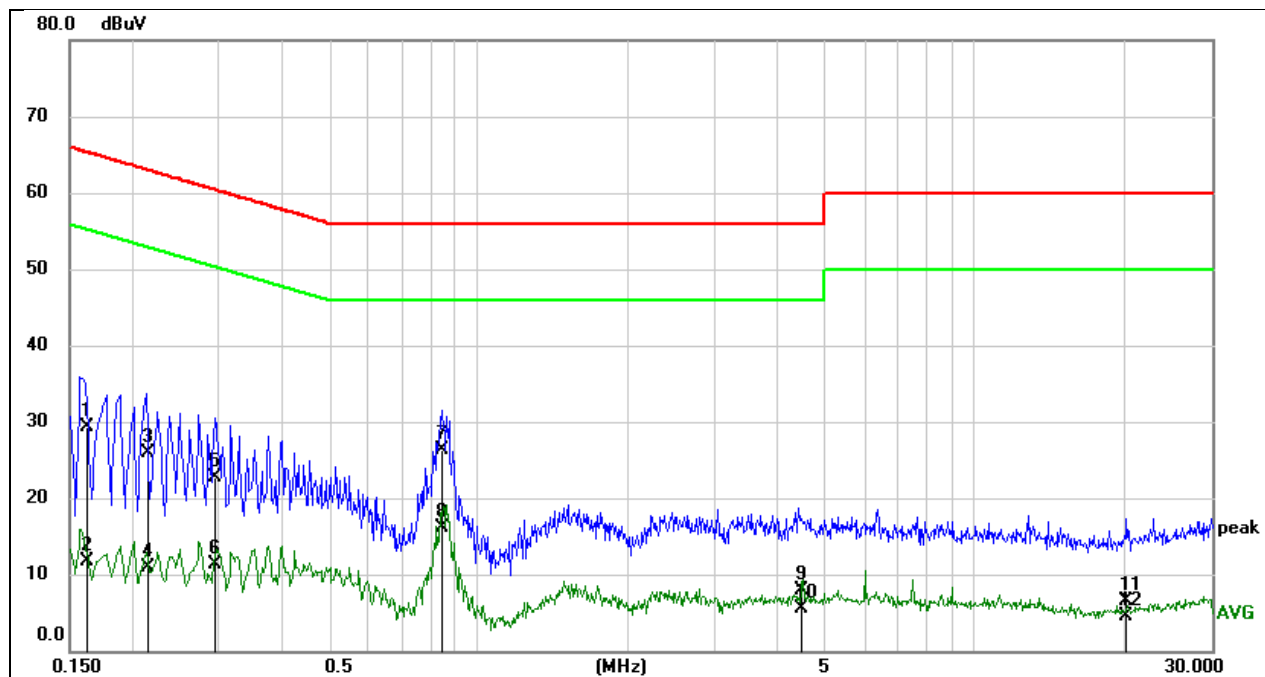

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1628	19.79	9.52	29.31	65.32	-36.01	QP
2	0.1628	2.28	9.52	11.80	55.32	-43.52	AVG
3	0.2167	16.27	9.58	25.85	62.94	-37.09	QP
4	0.2167	1.33	9.58	10.91	52.94	-42.03	AVG
5	0.2951	13.11	9.56	22.67	60.38	-37.71	QP
6	0.2951	1.82	9.56	11.38	50.38	-39.00	AVG
7	0.8465	16.90	9.50	26.40	56.00	-29.60	QP
8	0.8465	6.69	9.50	16.19	46.00	-29.81	AVG
9	4.4549	-1.62	9.61	7.99	56.00	-48.01	QP
10	4.4549	-4.15	9.61	5.46	46.00	-40.54	AVG
11	20.2351	-3.27	9.74	6.47	60.00	-53.53	QP
12	20.2351	-5.23	9.74	4.51	50.00	-45.49	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.


## 11. TEST DATA FOR BLE


### 11.1. APPENDIX A1: DTS BANDWIDTH

#### 11.1.1. Test Result


Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.72	2401.64	2402.36	≥0.5	PASS
		2440	0.72	2439.64	2440.36	≥0.5	PASS
		2480	0.72	2479.64	2480.36	≥0.5	PASS
BLE_2M	Ant1	2404	1.26	2403.35	2404.61	≥0.5	PASS
		2440	1.26	2439.34	2440.61	≥0.5	PASS
		2478	1.26	2477.34	2478.61	≥0.5	PASS

### 11.1.2. Test Graphs

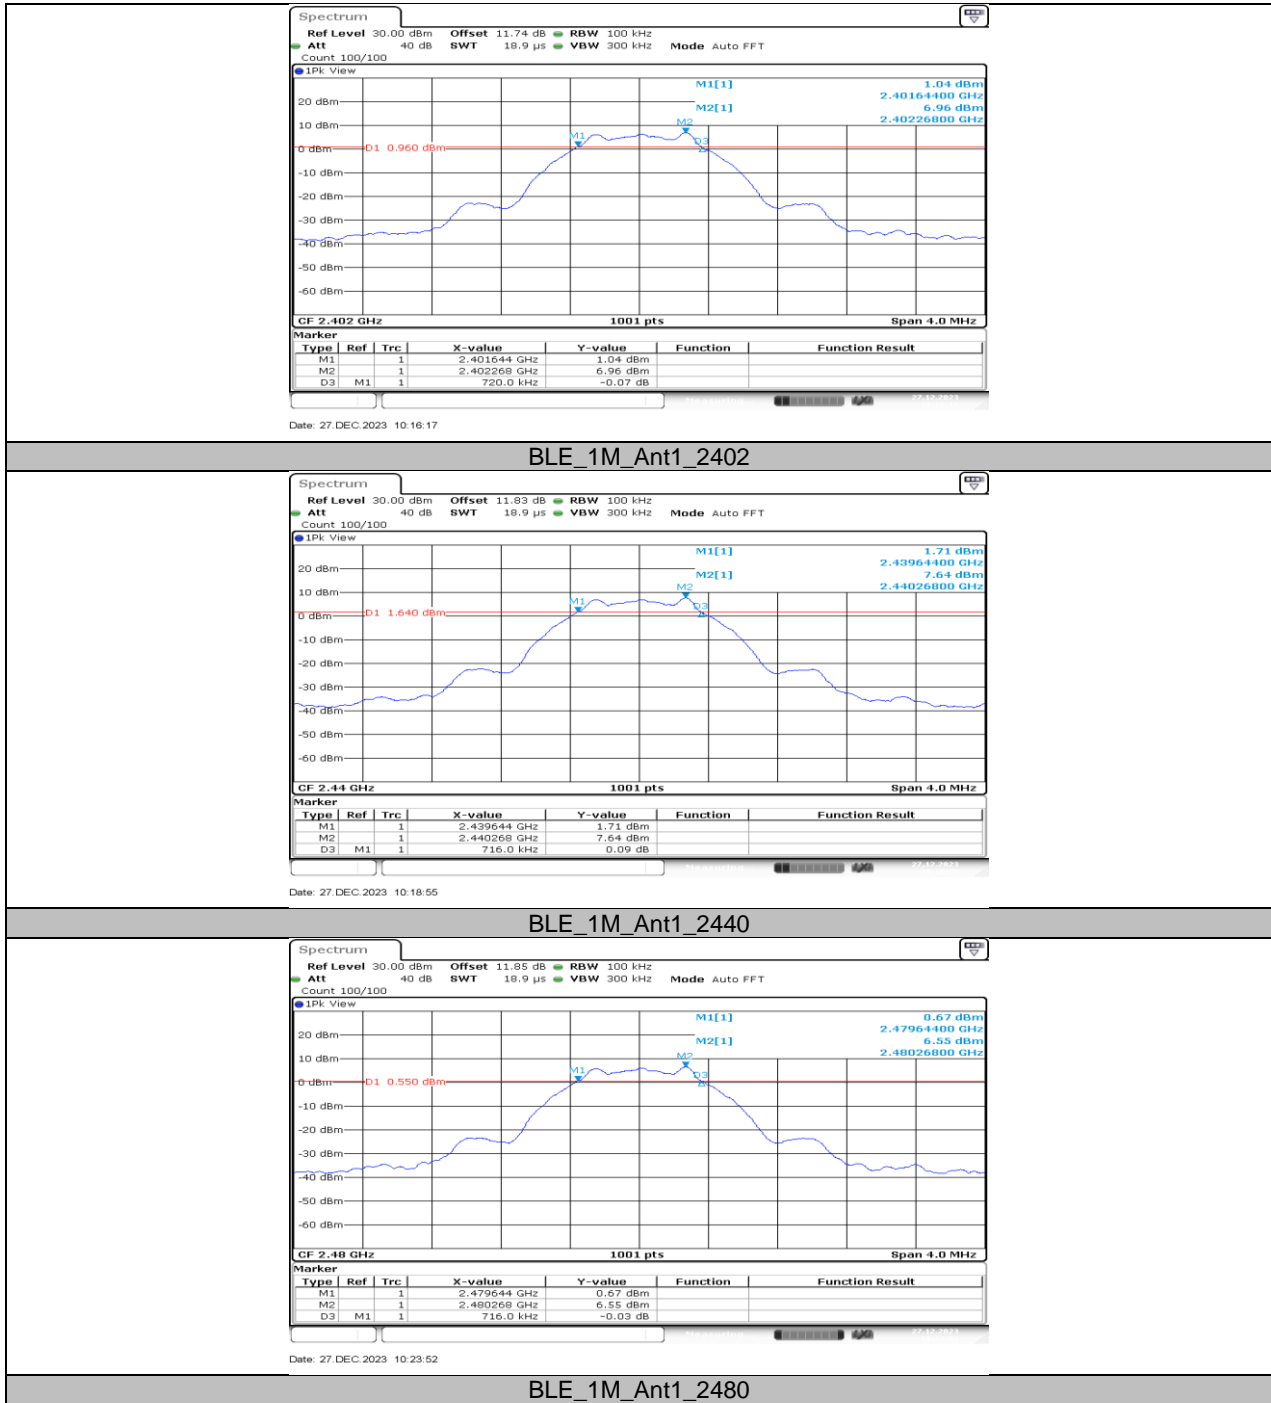


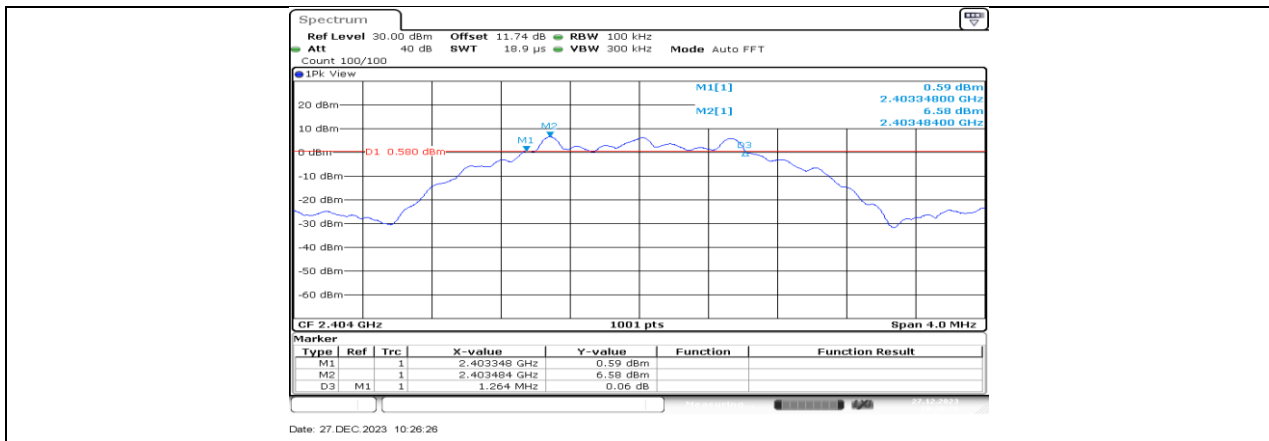

BLE\_2M\_Ant1\_2404

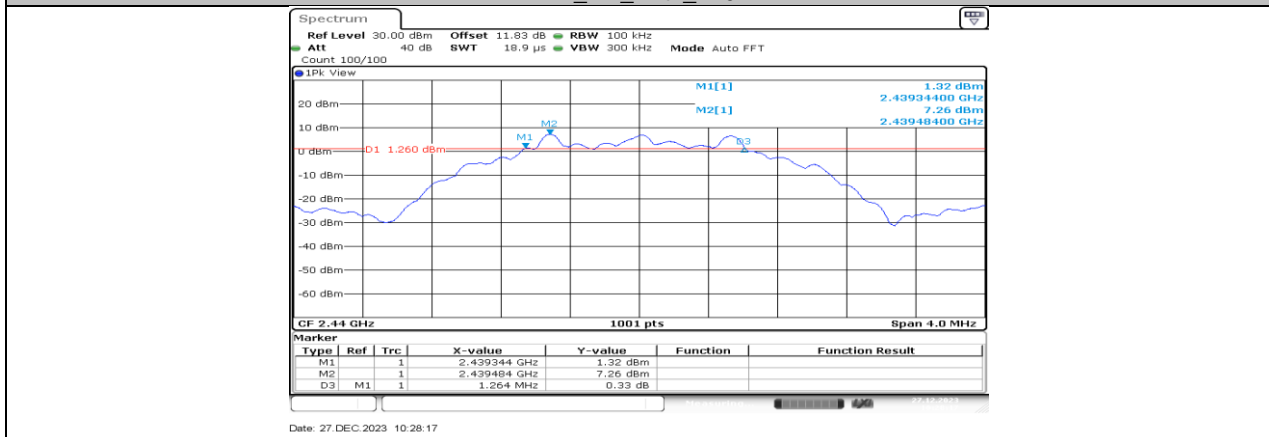

BLE\_2M\_Ant1\_2440

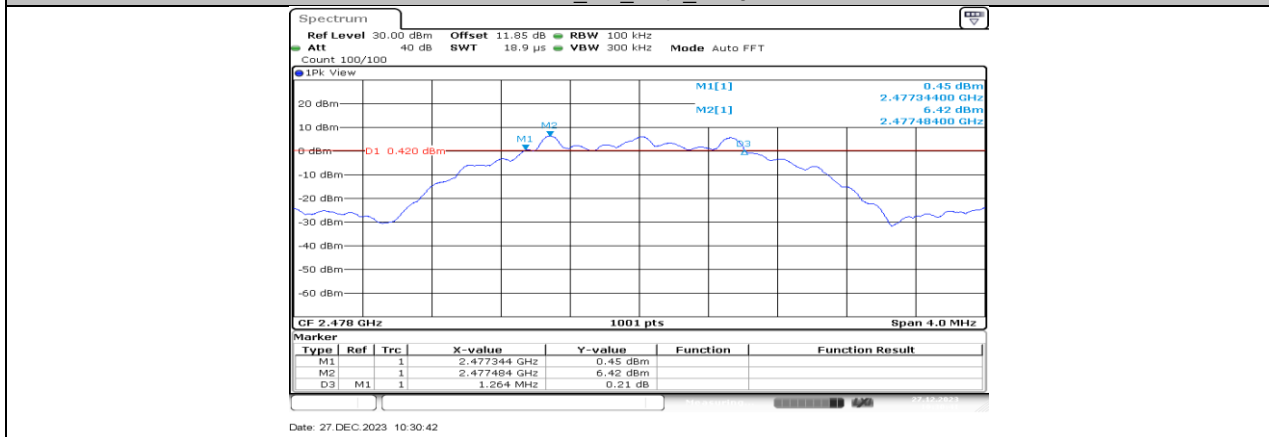

BLE\_2M\_Ant1\_2478




## 11.2. APPENDIX B1: OCCUPIED CHANNEL BANDWIDTH


### 11.2.1. Test Result

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
BLE_1M	Ant1	2402	1.051	2401.4845	2402.5355	PASS
		2440	1.051	2439.4845	2440.5355	PASS
		2480	1.047	2479.4845	2480.5315	PASS
BLE_2M	Ant1	2404	2.058	2402.9930	2405.0509	PASS
		2440	2.062	2438.9890	2441.0509	PASS
		2478	2.062	2476.9890	2479.0509	PASS


### 11.2.2. Test Graphs

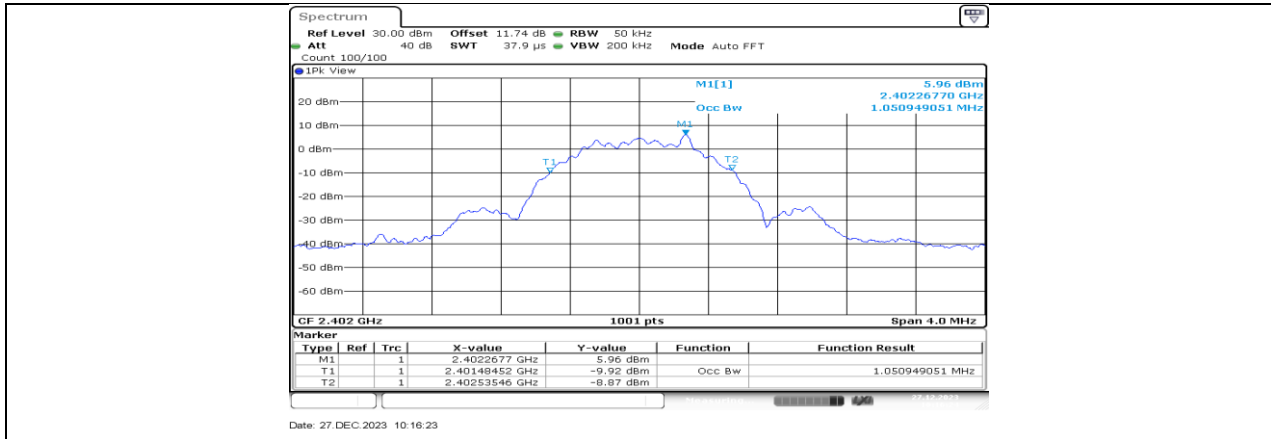


BLE\_1M\_Ant1\_2402

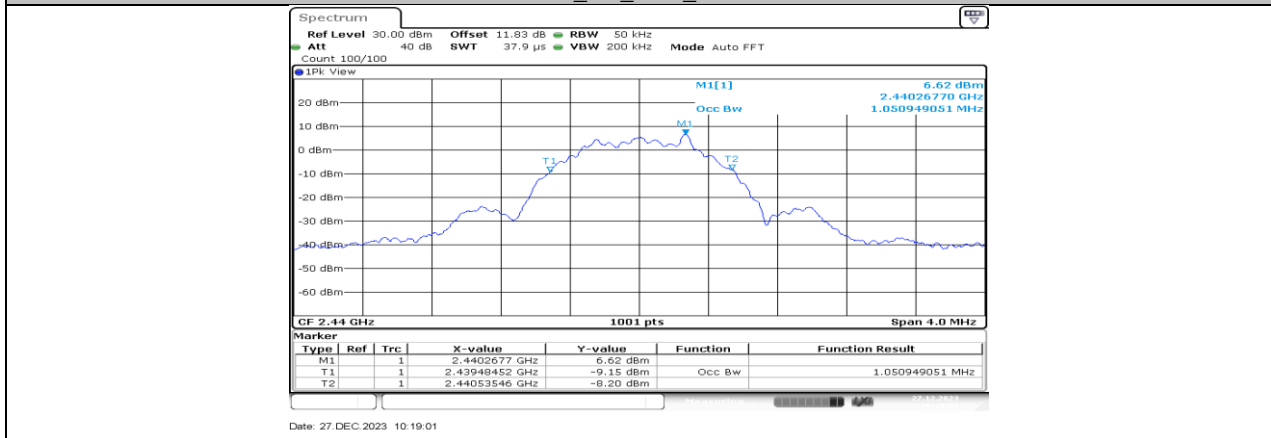


BLE\_1M\_Ant1\_2440

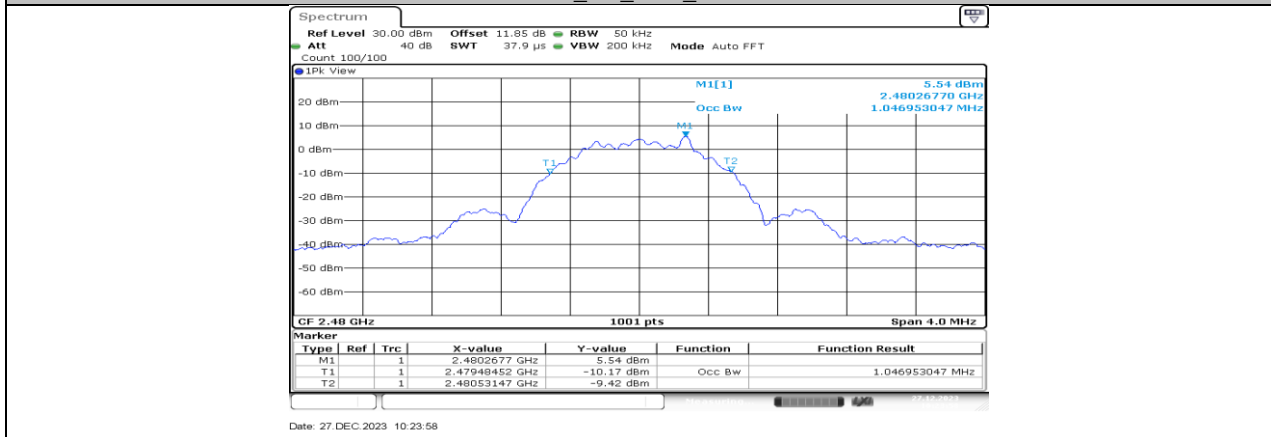


BLE\_1M\_Ant1\_2480

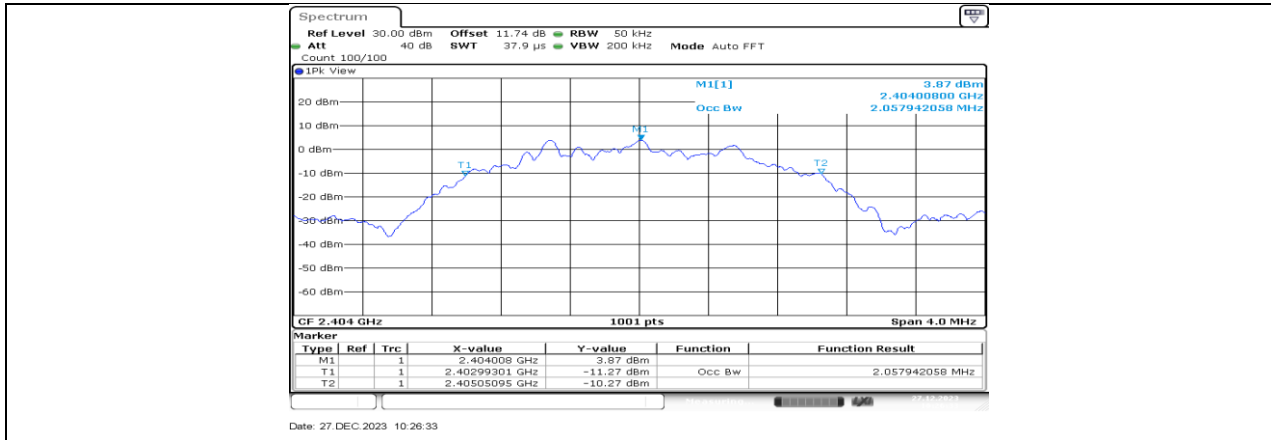

Date: 27.DEC.2023 10:26:33

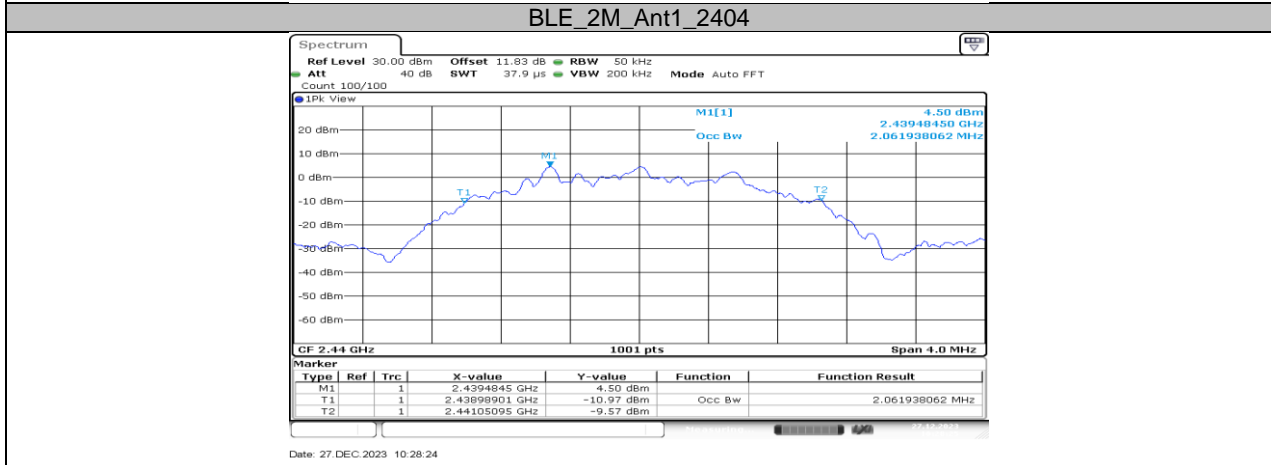

Date: 27.DEC.2023 10:28:24

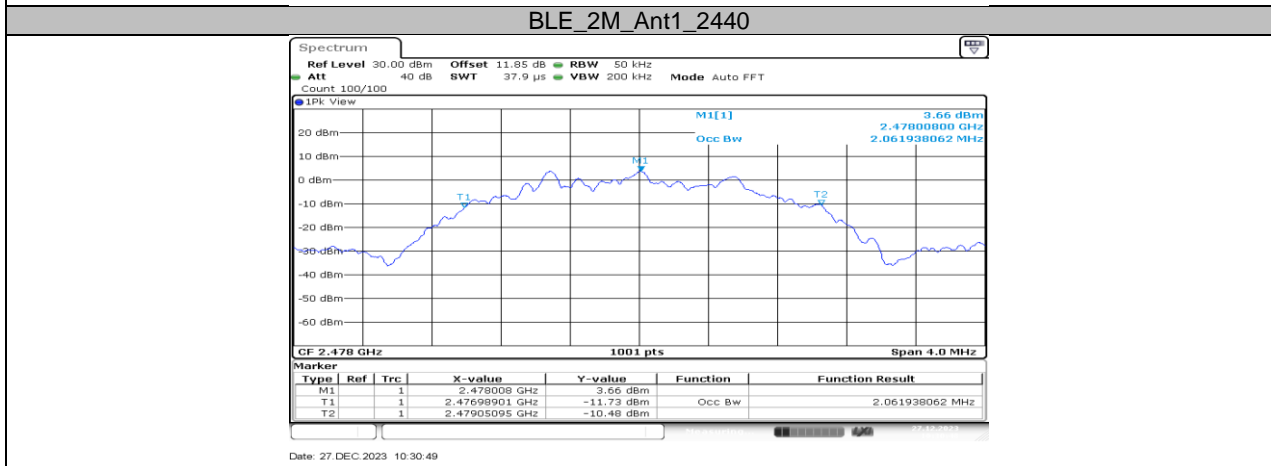

Date: 27.DEC.2023 10:30:49

**BLE\_2M\_Ant1\_2478**

### 11.3. APPENDIX C1: MAXIMUM CONDUCTED OUTPUT POWER

#### 11.3.1. Test Result

Test Mode	Antenna	Frequency[MHz]	Peak-Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	7.19	≤30	PASS
		2440	7.83	≤30	PASS
		2480	6.81	≤30	PASS
BLE_2M	Ant1	2404	7.12	≤30	PASS
		2440	7.74	≤30	PASS
		2478	6.93	≤30	PASS


Test Mode	Antenna	Frequency[MHz]	AVG-Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	3.85	≤30	PASS
		2440	4.60	≤30	PASS
		2480	3.74	≤30	PASS
BLE_2M	Ant1	2404	3.83	≤30	PASS
		2440	4.57	≤30	PASS
		2478	3.72	≤30	PASS


## 11.4. APPENDIX D1: MAXIMUM POWER SPECTRAL DENSITY

### 11.4.1. Test Result


Test Mode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-9.64	≤8.00	PASS
		2440	-8.96	≤8.00	PASS
		2480	-10.03	≤8.00	PASS
BLE_2M	Ant1	2404	-12.19	≤8.00	PASS
		2440	-11.60	≤8.00	PASS
		2478	-12.43	≤8.00	PASS

### 11.4.2. Test Graphs

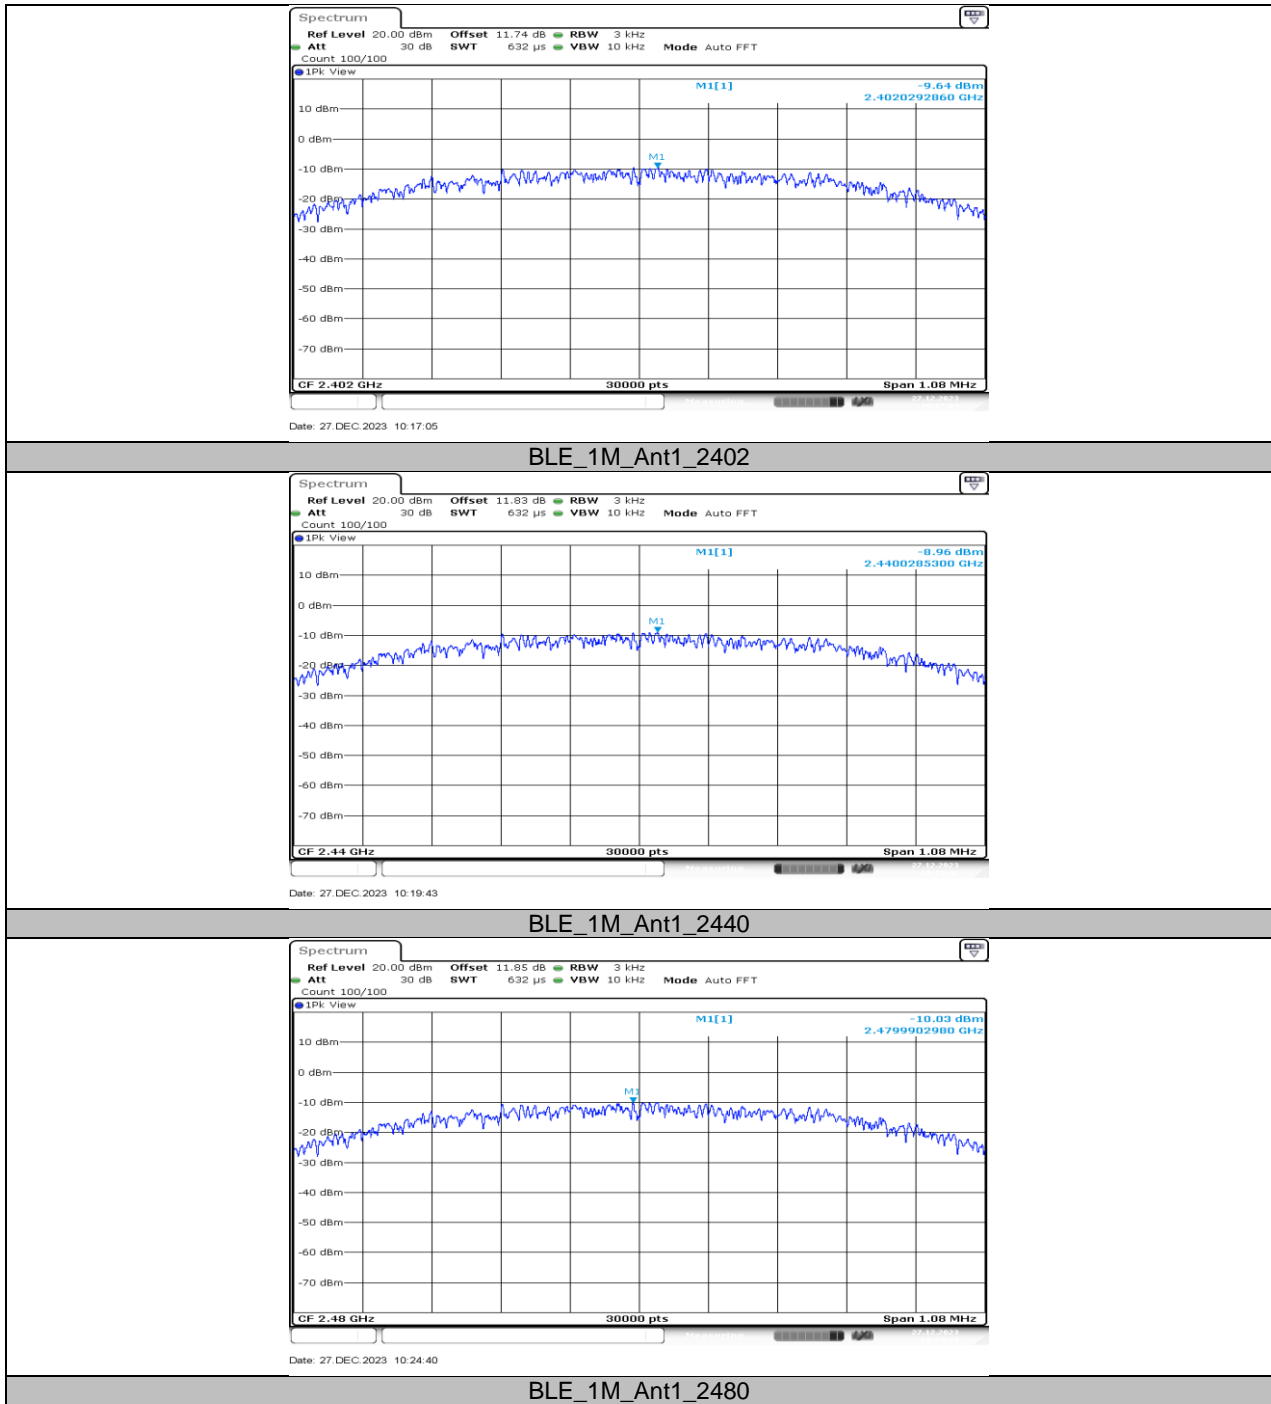


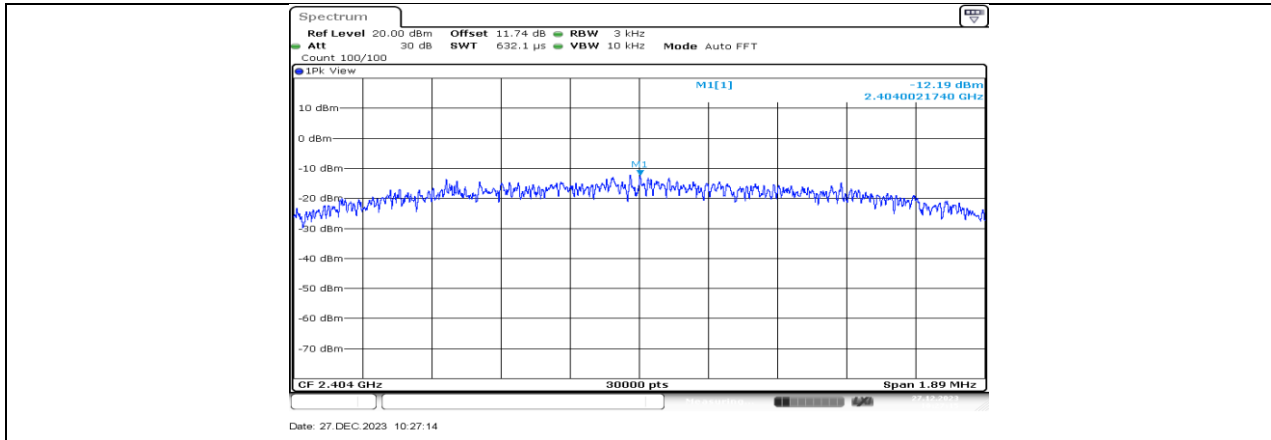

BLE\_2M\_Ant1\_2404

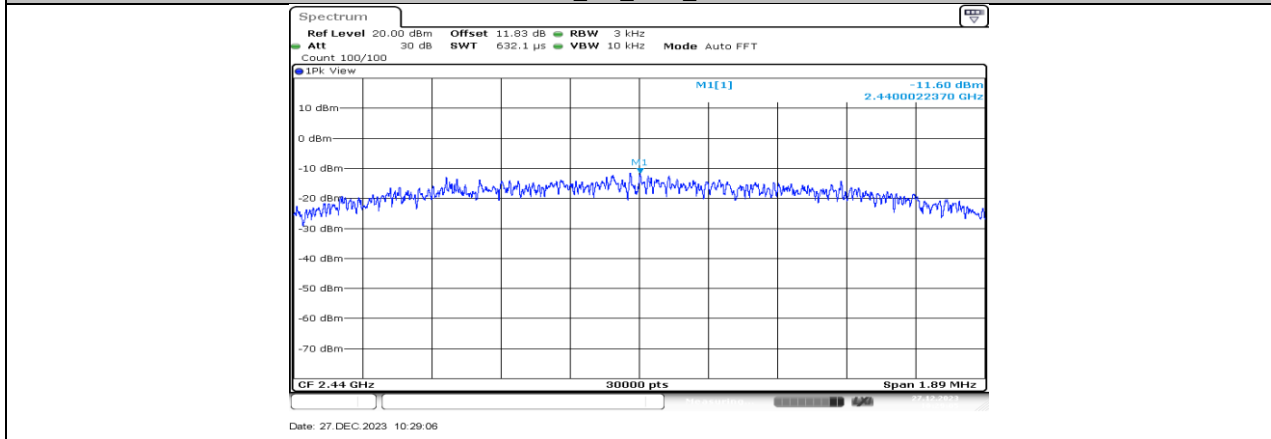

BLE\_2M\_Ant1\_2440

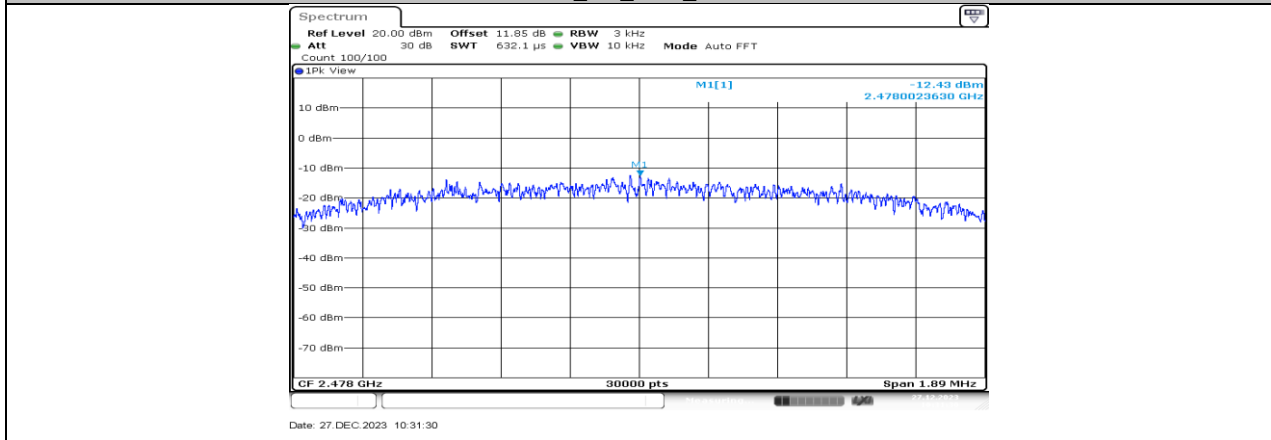

BLE\_2M\_Ant1\_2478


## 11.5. APPENDIX E1: BAND EDGE MEASUREMENTS


### 11.5.1. Test Result

Test Mode	Antenna	ChName	Frequency [MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	7.03	-45.71	$\leq -12.97$	PASS
		High	2480	6.55	-45.03	$\leq -13.45$	PASS
BLE_2M	Ant1	Low	2404	6.64	-46.77	$\leq -13.36$	PASS
		High	2478	6.45	-45.47	$\leq -13.55$	PASS



### 11.5.2. Test Graphs

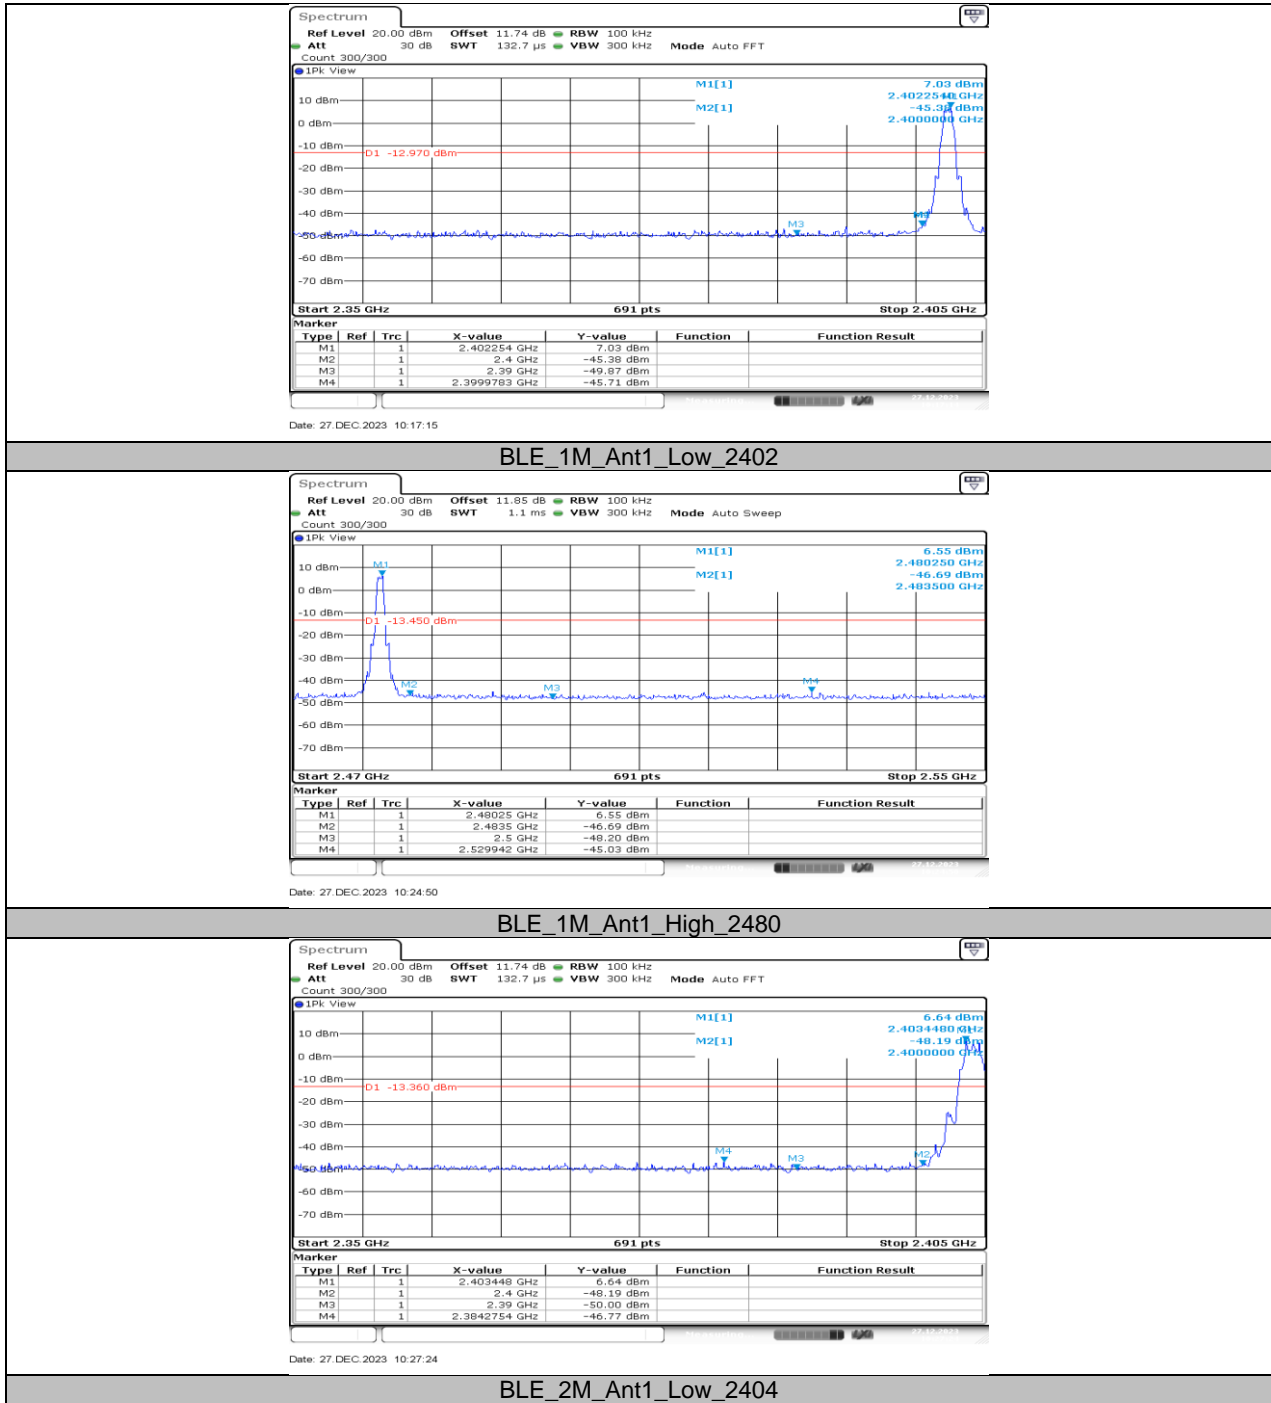

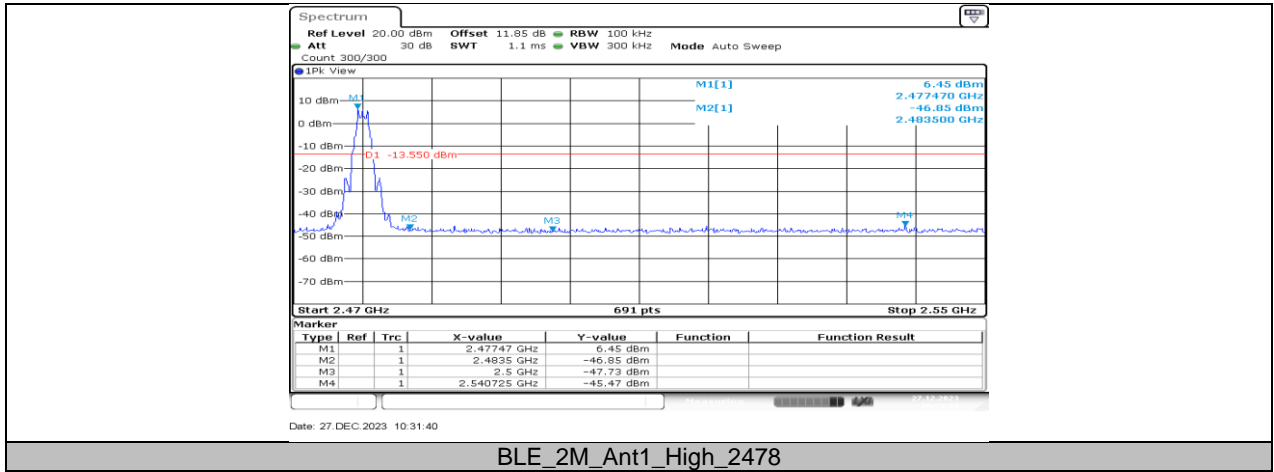



## 11.6. APPENDIX F1: CONDUCTED SPURIOUS EMISSION

### 11.6.1. Test Result


Test Mode	Antenna	Frequency[MHz]	FreqRange [MHz]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	6.99	---	PASS
			30~1000	-55.27	≤-13.01	PASS
			1000~26500	-49.67	≤-13.01	PASS
		2440	Reference	7.64	---	PASS
			30~1000	-55.16	≤-12.36	PASS
			1000~26500	-50.39	≤-12.36	PASS
		2480	Reference	6.55	---	PASS
			30~1000	-55.89	≤-13.45	PASS
			1000~26500	-49.85	≤-13.45	PASS
BLE_2M	Ant1	2404	Reference	6.63	---	PASS
			30~1000	-55.22	≤-13.37	PASS
			1000~26500	-50.72	≤-13.37	PASS
		2440	Reference	7.25	---	PASS
			30~1000	-55.39	≤-12.75	PASS
			1000~26500	-50.45	≤-12.75	PASS
		2478	Reference	6.41	---	PASS
			30~1000	-55.94	≤-13.59	PASS
			1000~26500	-50.47	≤-13.59	PASS

### 11.6.2. Test Graphs

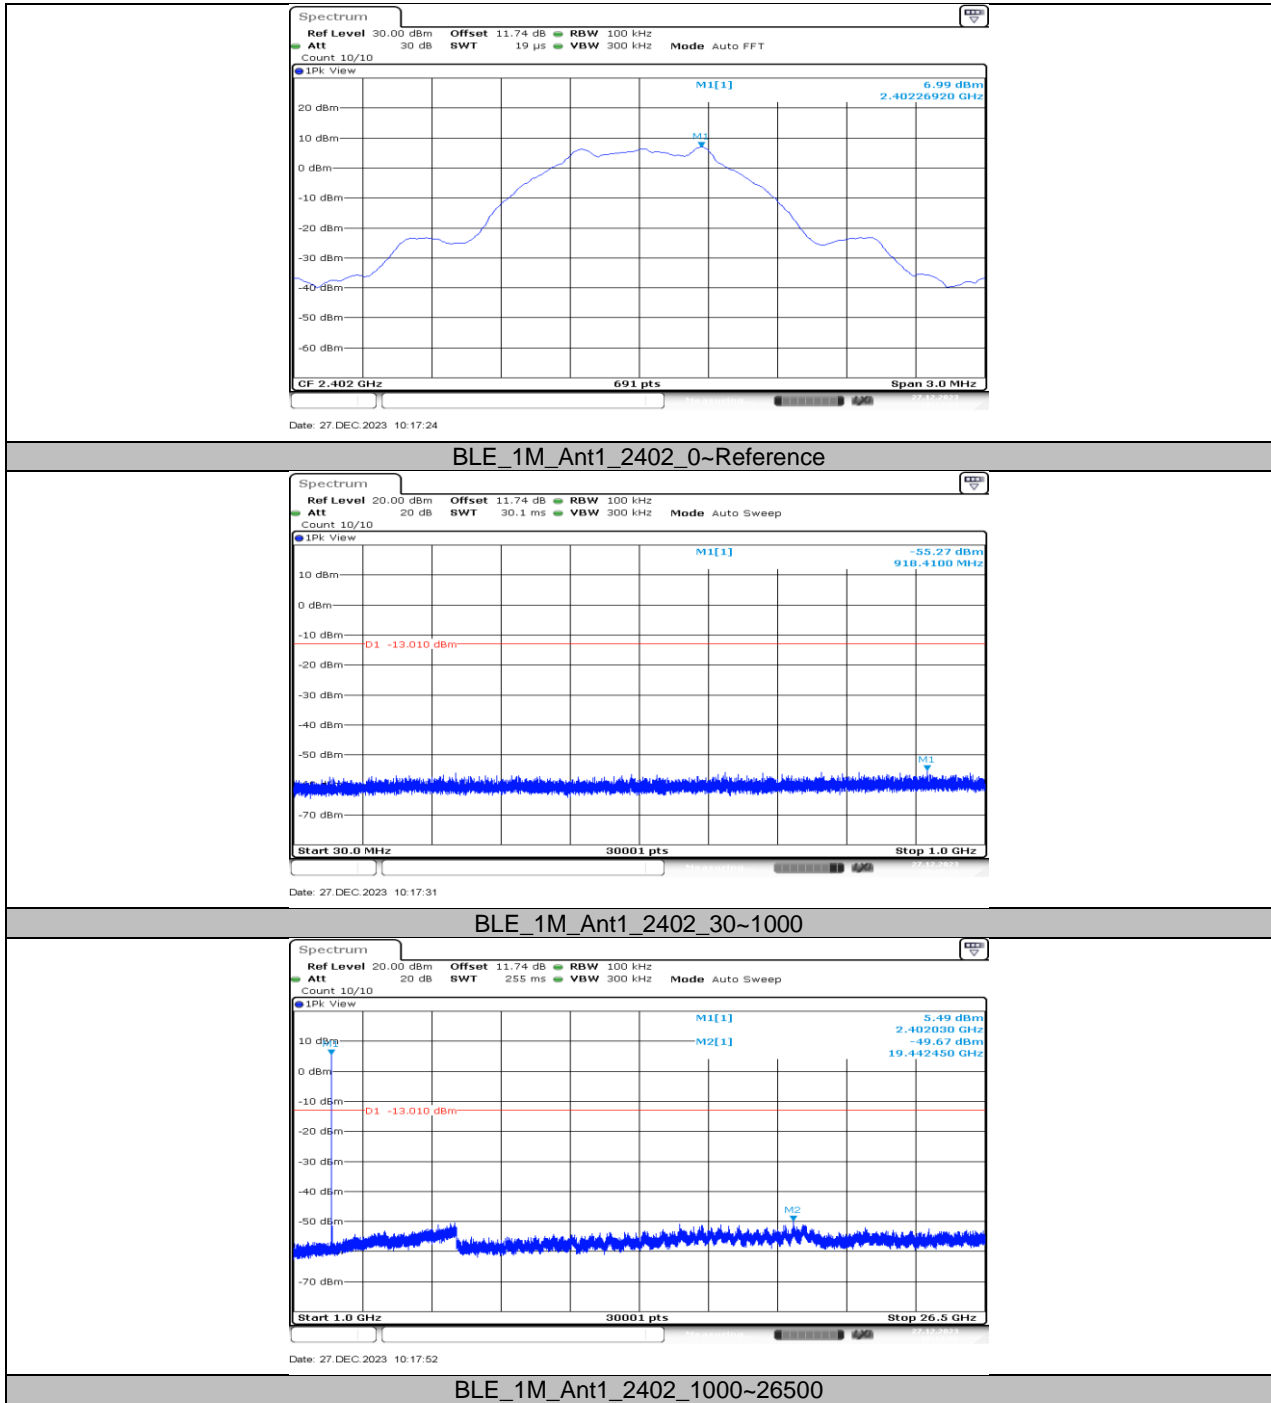


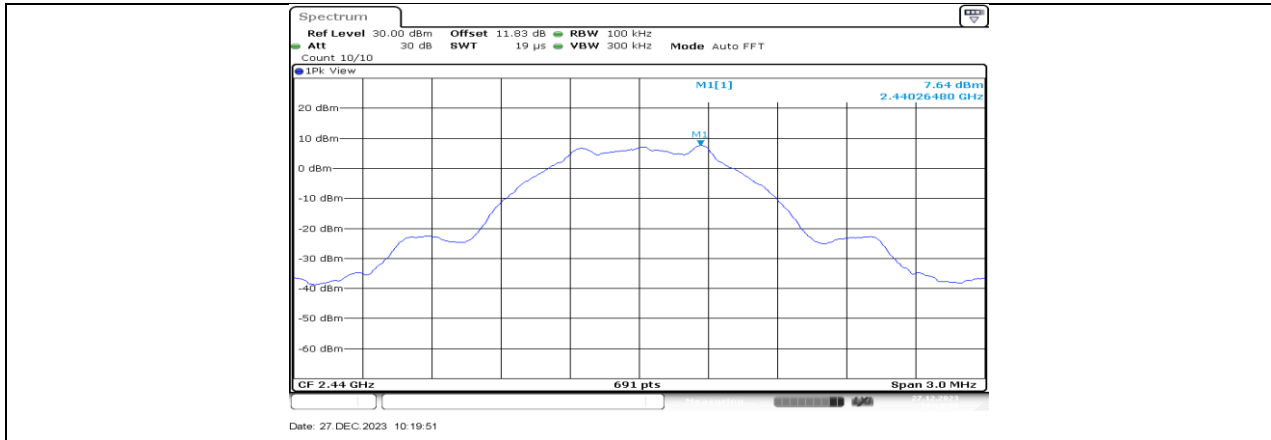


BLE\_1M\_Ant1\_2440\_0~Reference

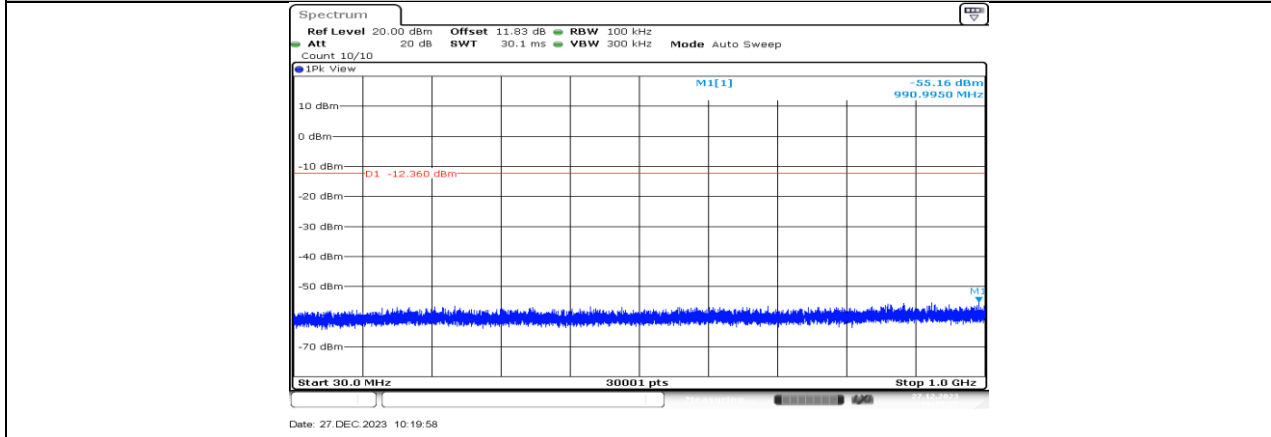



BLE\_1M\_Ant1\_2440\_30~1000

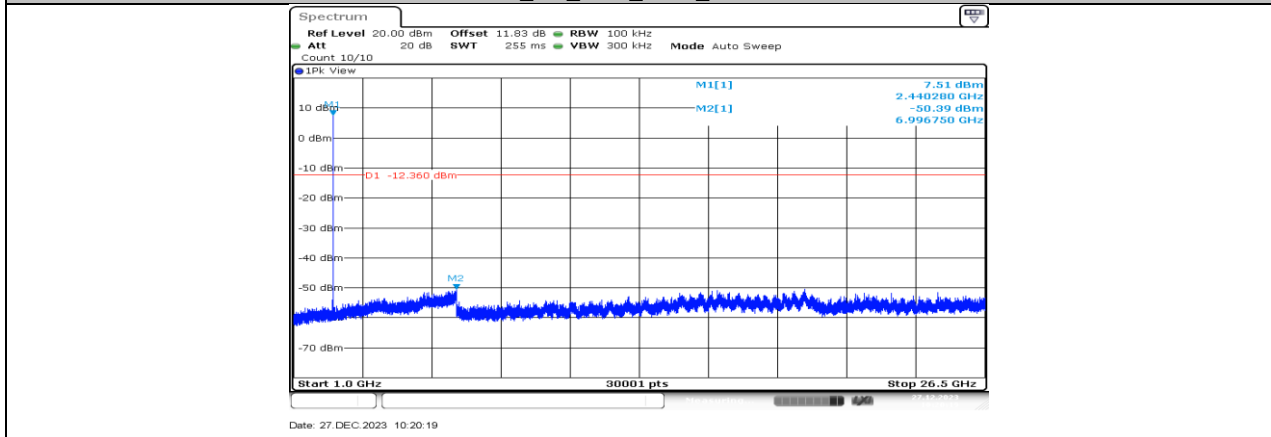


BLE\_1M\_Ant1\_2440\_1000~26500

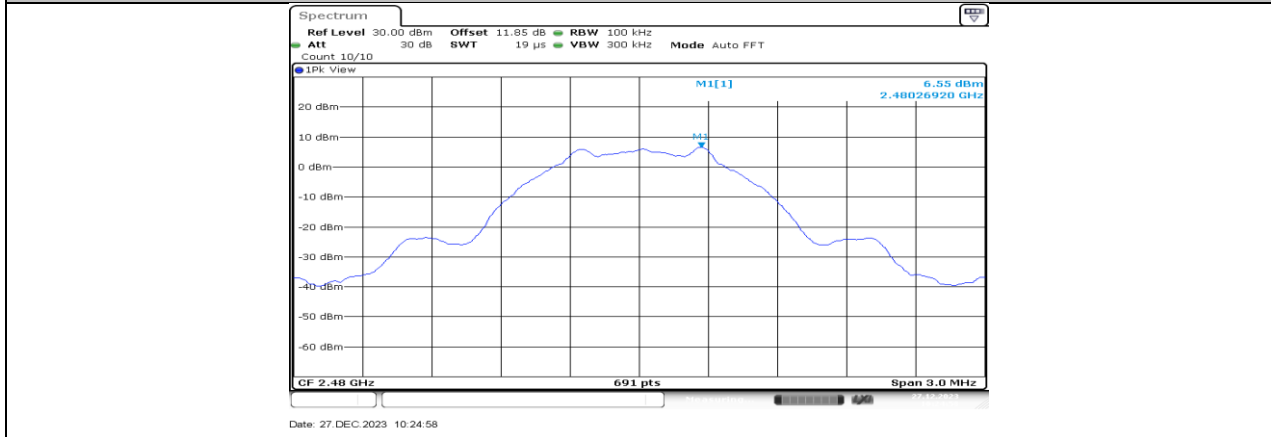

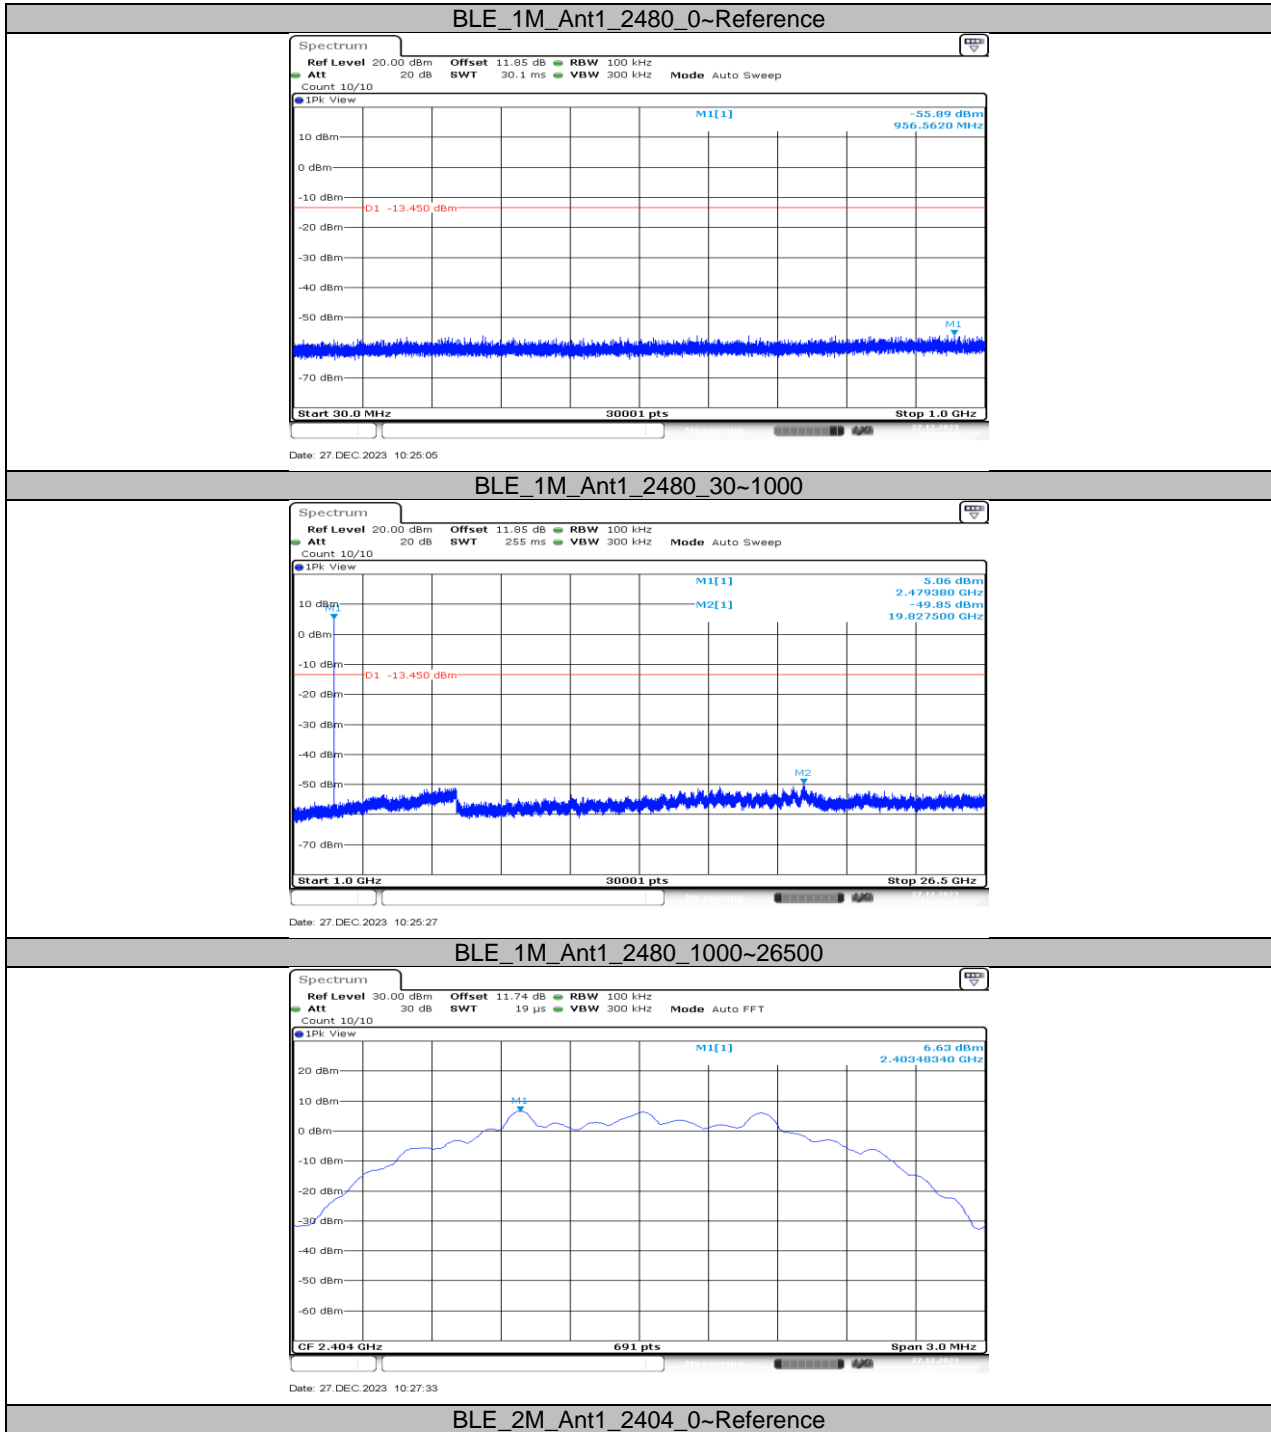


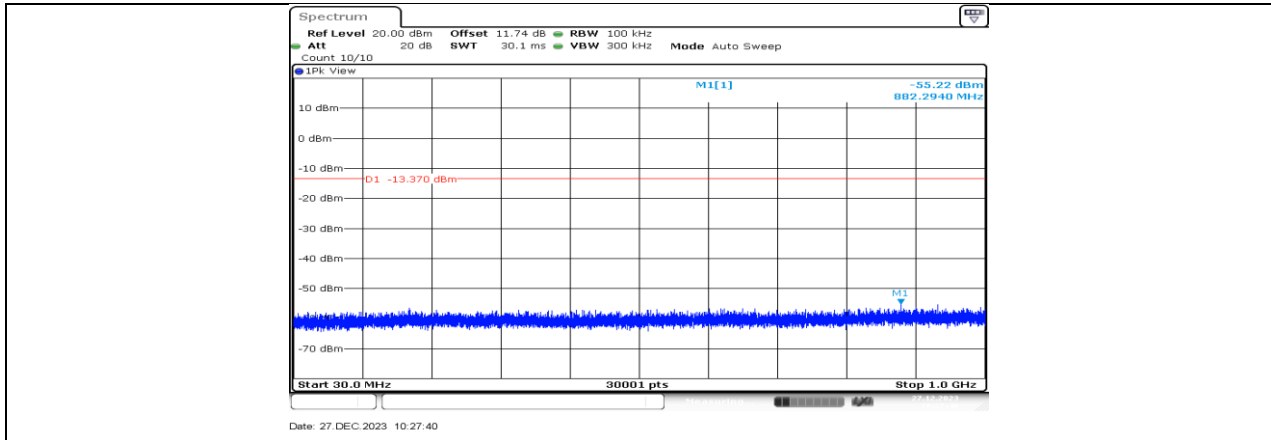


BLE\_2M\_Ant1\_2404\_30~1000

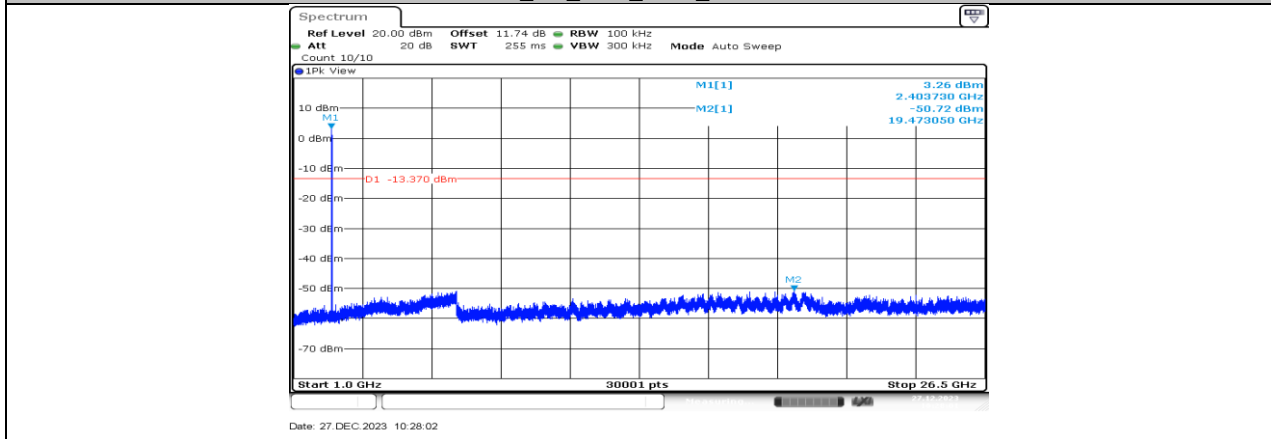


BLE\_2M\_Ant1\_2404\_1000~26500

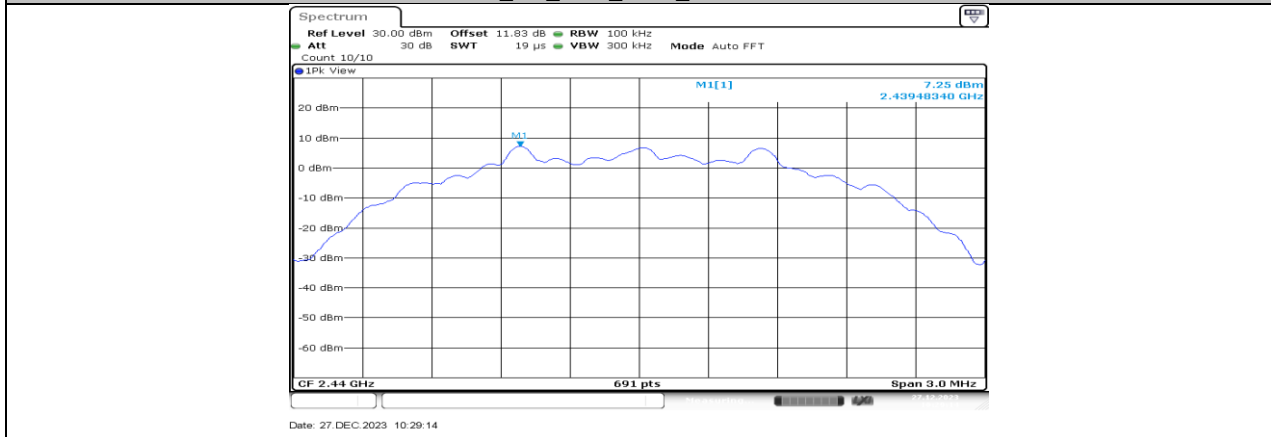


BLE\_2M\_Ant1\_2440\_0~Reference

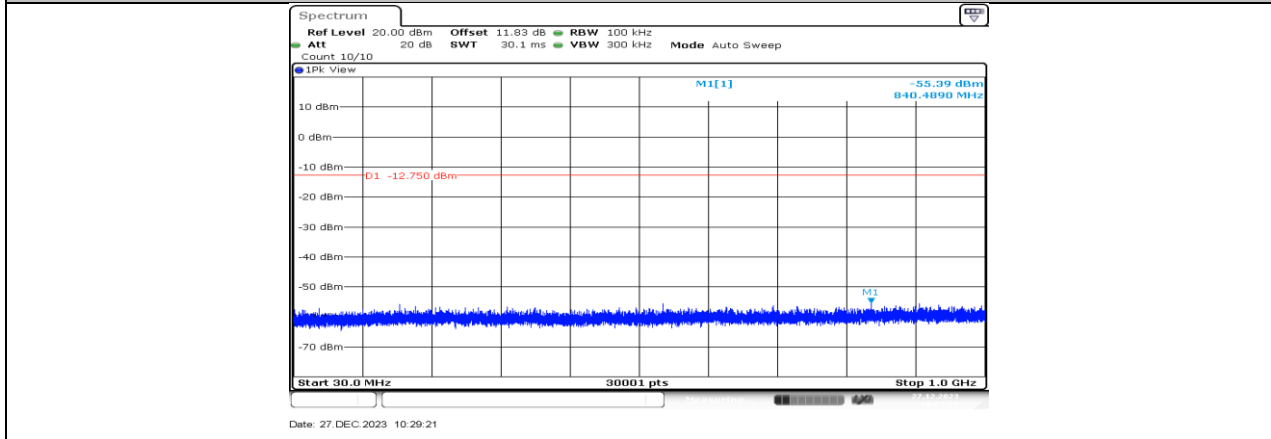

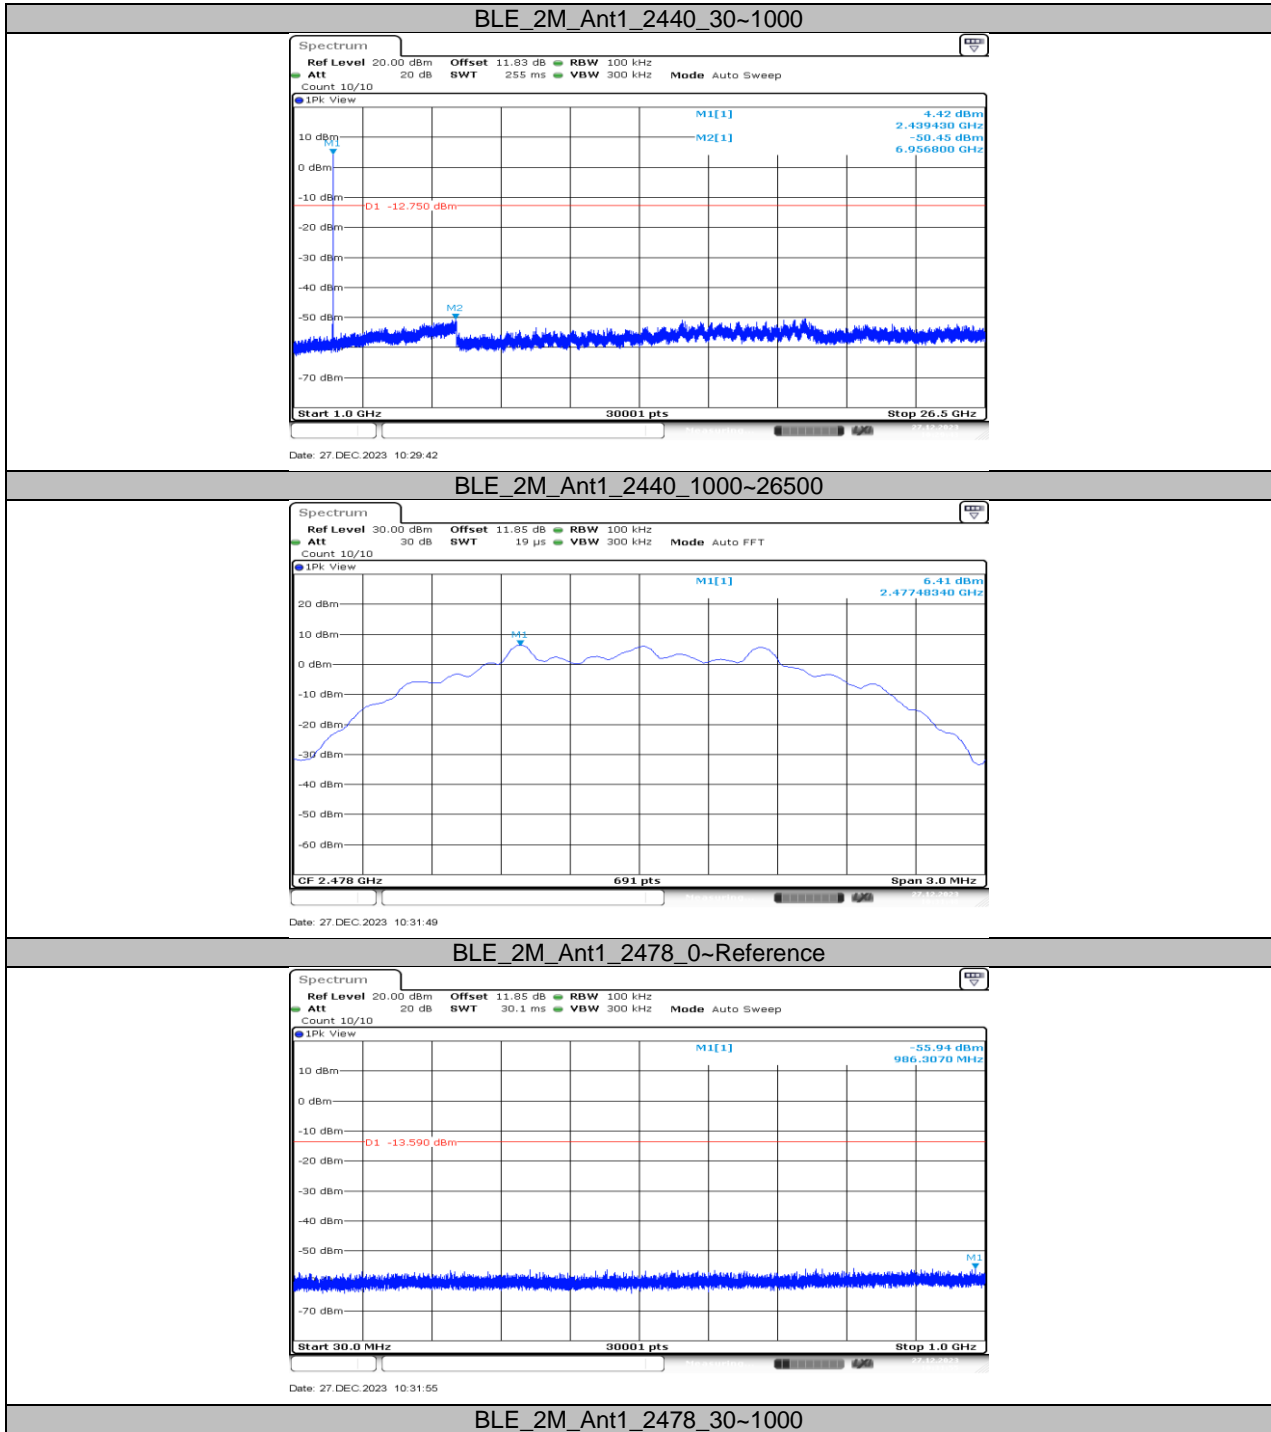



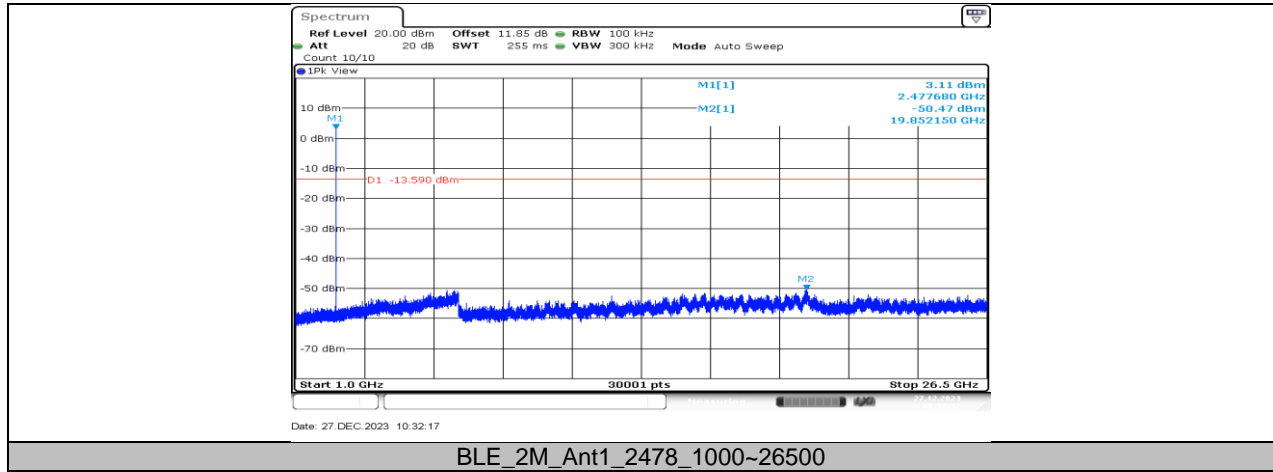

## 11.7. APPENDIX G1: DUTY CYCLE

### 11.7.1. Test Result

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
BLE_1M	2.11	2.47	0.8543	85.43	0.68	0.47	1
BLE_2M	1.07	1.85	0.5784	57.84	2.38	0.93	1

Note:


Duty Cycle Correction Factor=10log (1/x).

Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

### 11.7.2. Test Graphs

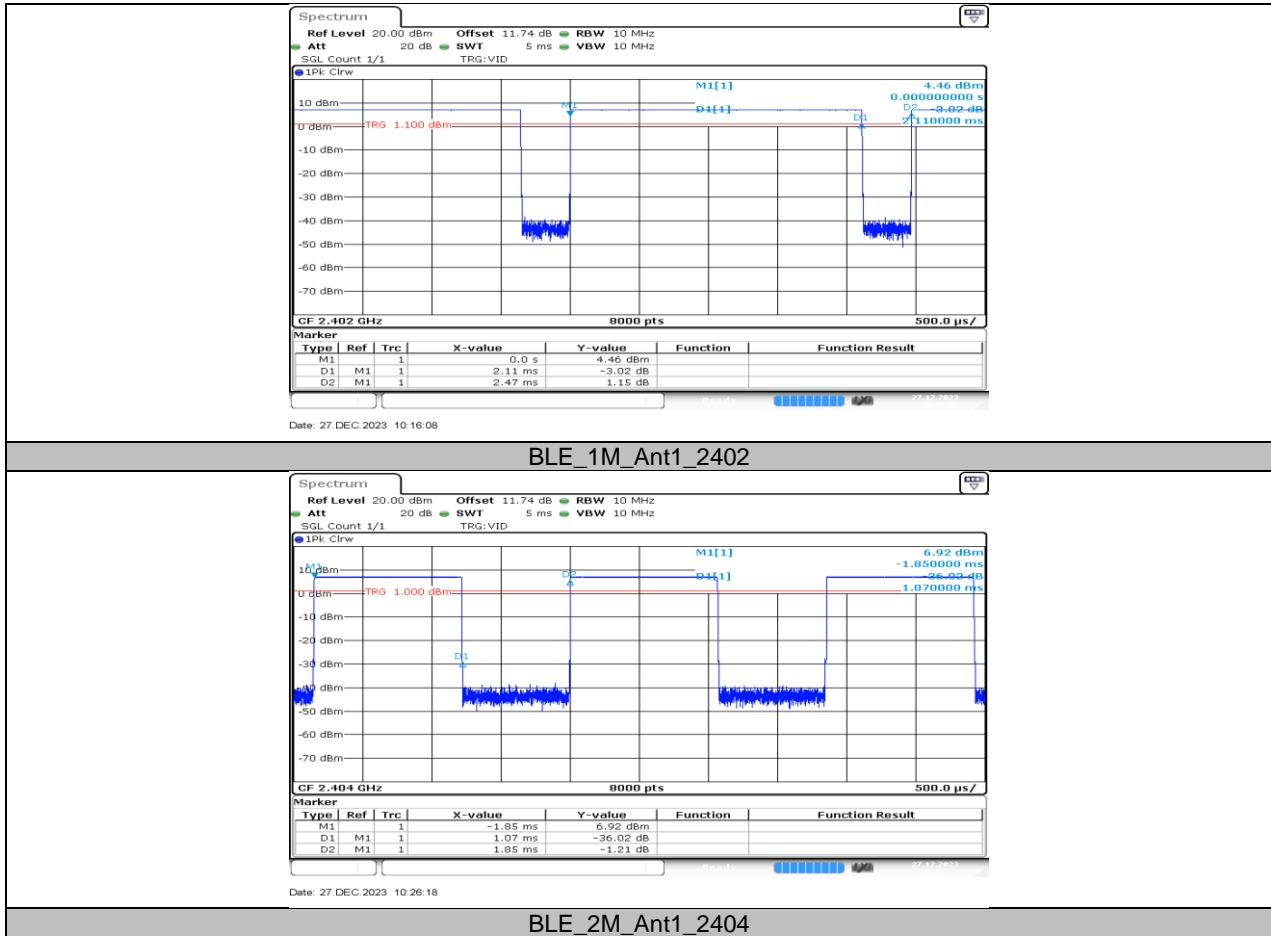


## 12. TEST DATA FOR QHS


### 12.1. APPENDIX A2: DTS BANDWIDTH

#### 12.1.1. Test Result


Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
QHS_2M	Ant1	2404	1.69	2403.14	2404.83	≥0.5	PASS
		2440	1.70	2439.14	2440.83	≥0.5	PASS
		2478	1.70	2477.14	2478.84	≥0.5	PASS
QHS_6M	Ant1	2404	1.55	2403.22	2404.77	≥0.5	PASS
		2440	1.67	2439.22	2440.89	≥0.5	PASS
		2478	1.55	2477.22	2478.76	≥0.5	PASS

### 12.1.2. Test Graphs

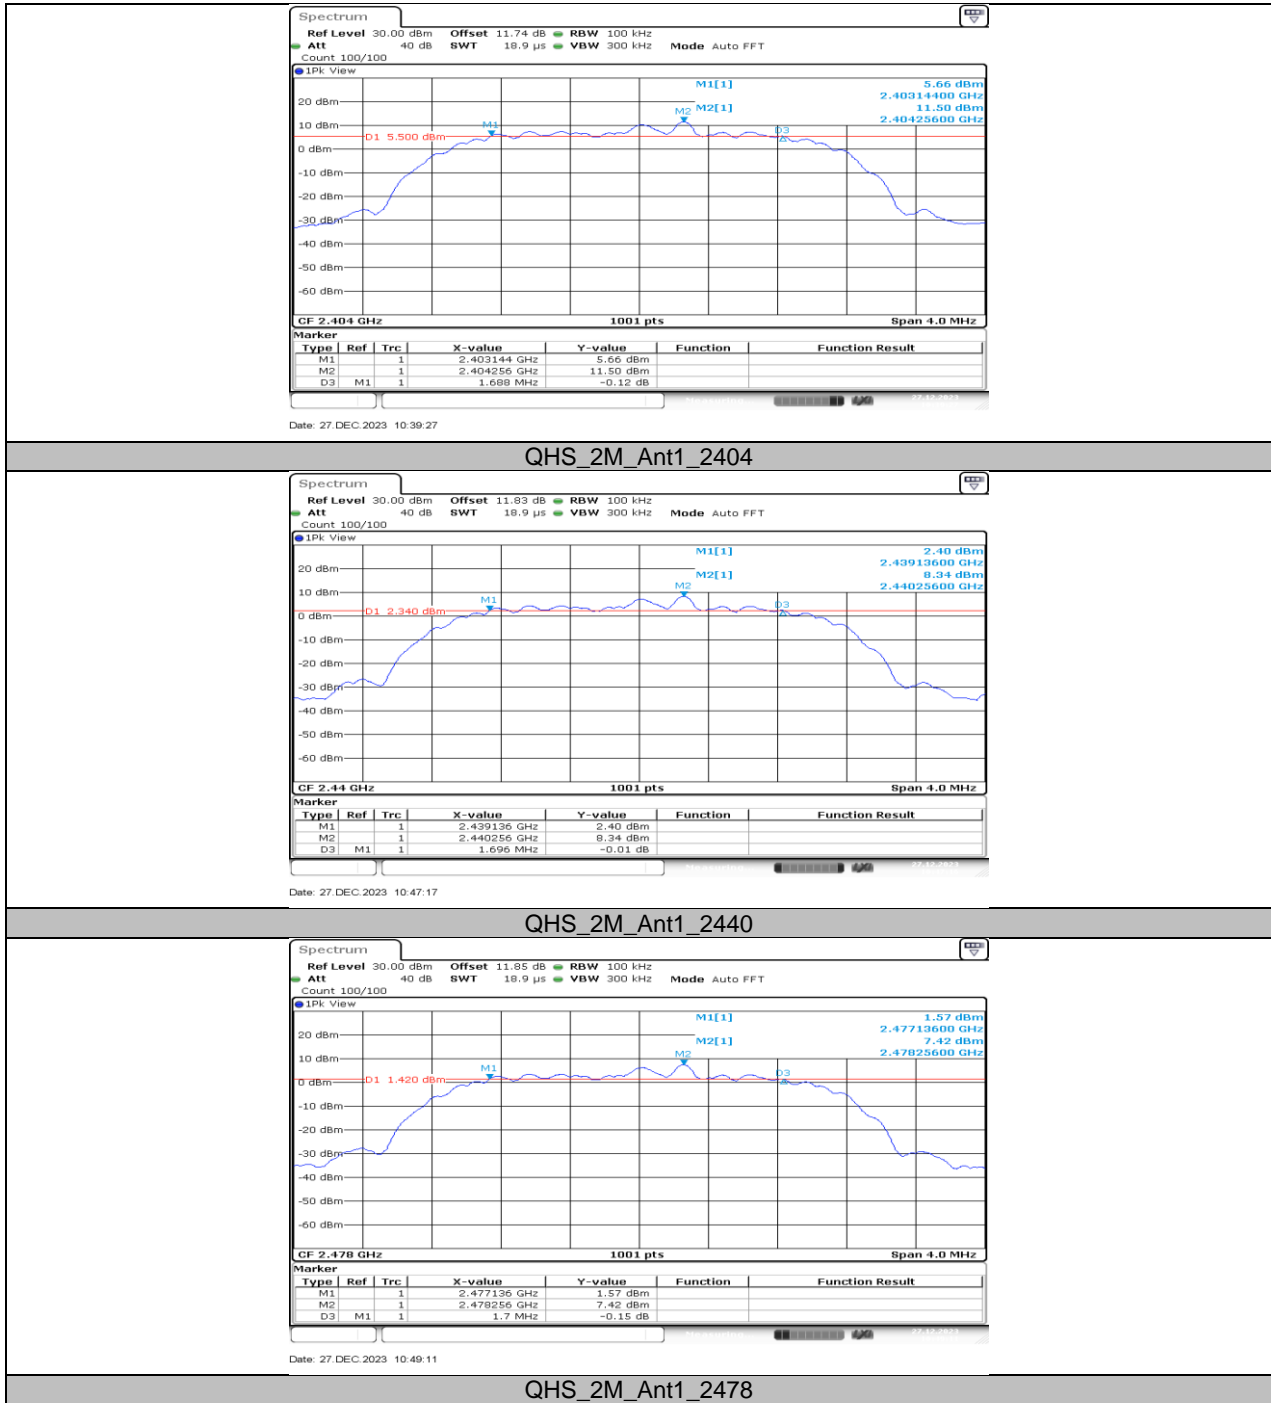


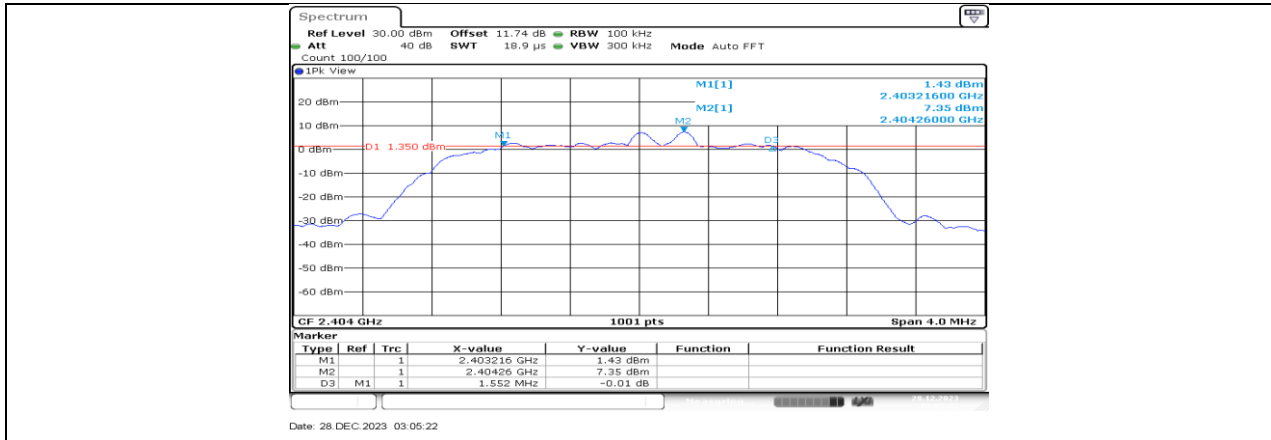

QHS\_6M\_Ant1\_2404

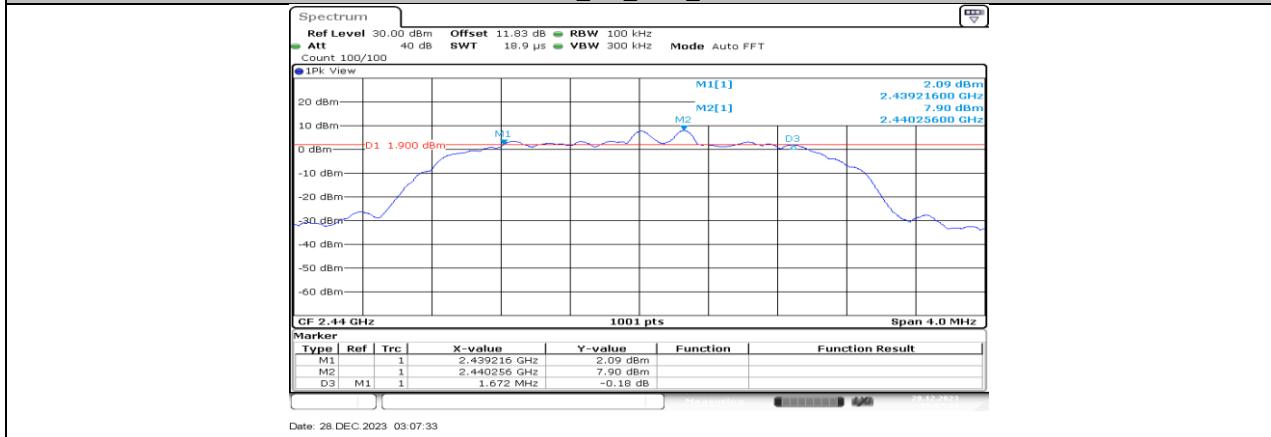

QHS\_6M\_Ant1\_2440

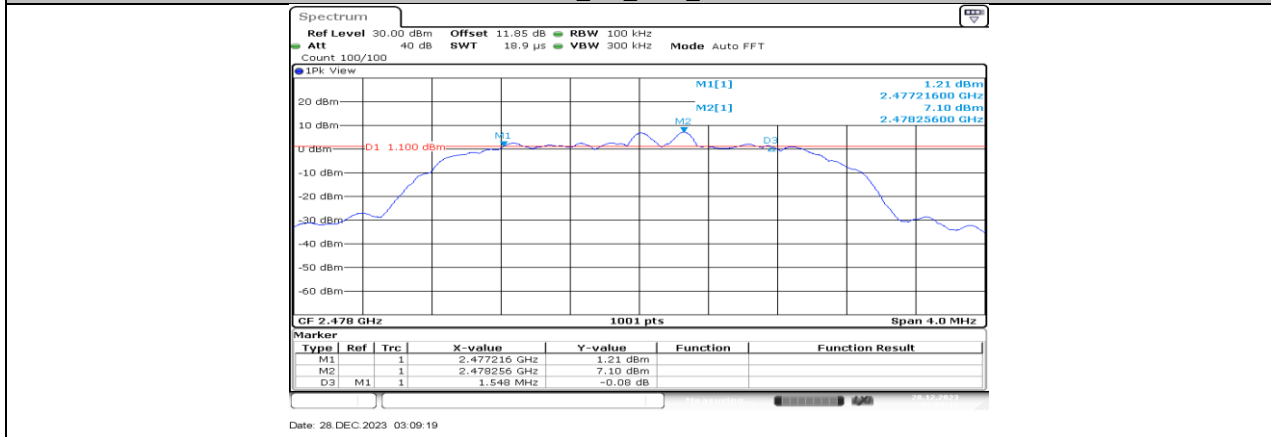


QHS\_6M\_Ant1\_2478

## 12.2. APPENDIX B2: OCCUPIED CHANNEL BANDWIDTH


### 12.2.1. Test Result

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
QHS_2M	Ant1	2404	2.362	2402.8292	2405.1908	PASS
		2440	2.358	2438.8292	2441.1868	PASS
		2478	2.358	2476.8292	2479.1868	PASS
QHS_6M	Ant1	2404	2.358	2402.8332	2405.1908	PASS
		2440	2.358	2438.8292	2441.1868	PASS
		2478	2.362	2476.8252	2479.1868	PASS


### 12.2.2. Test Graphs

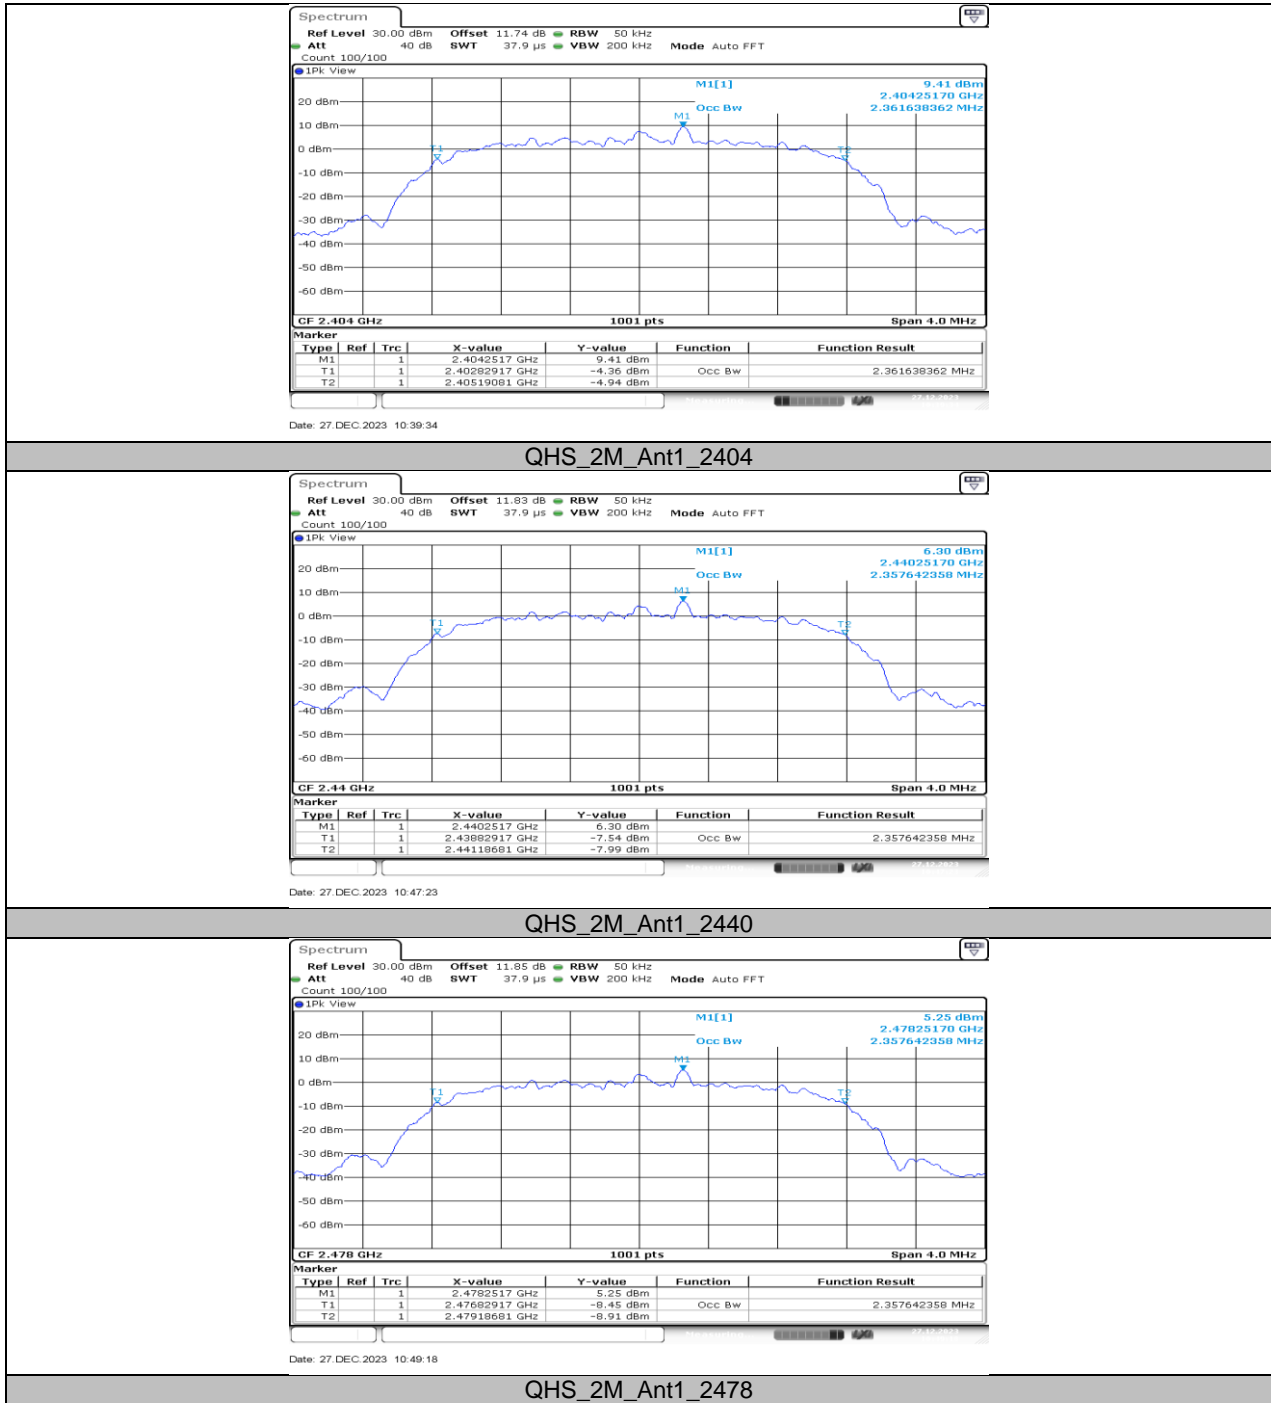




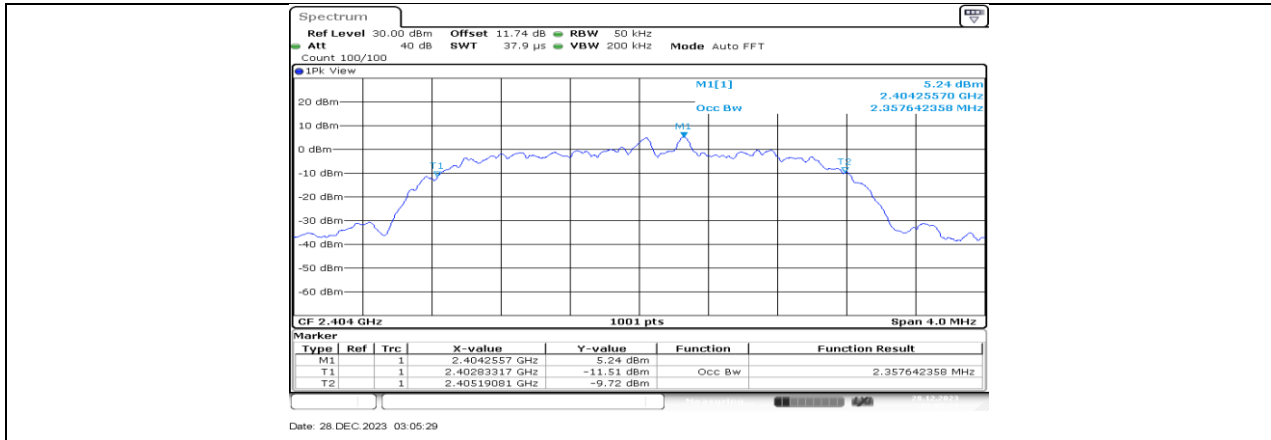

QHS\_6M\_Ant1\_2404

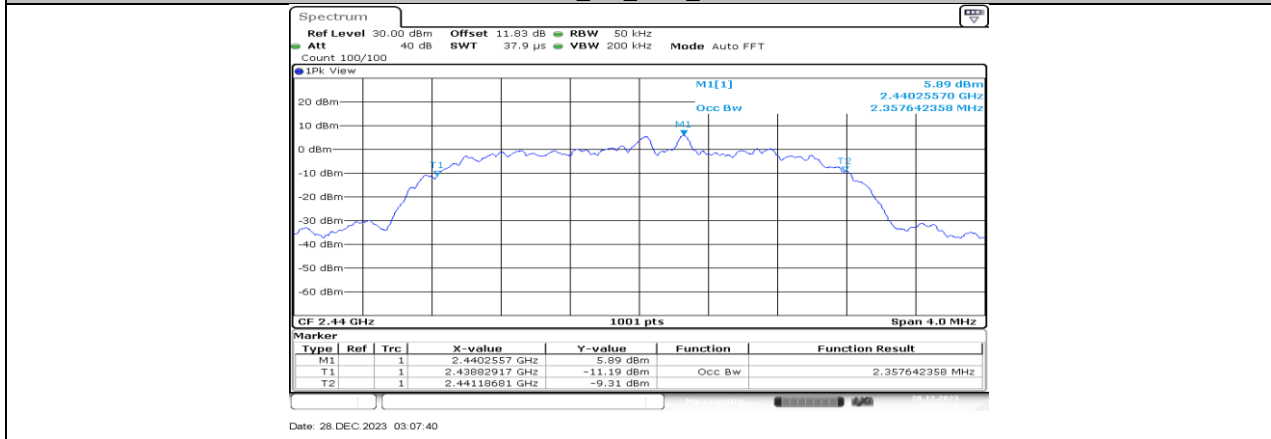

QHS\_6M\_Ant1\_2440

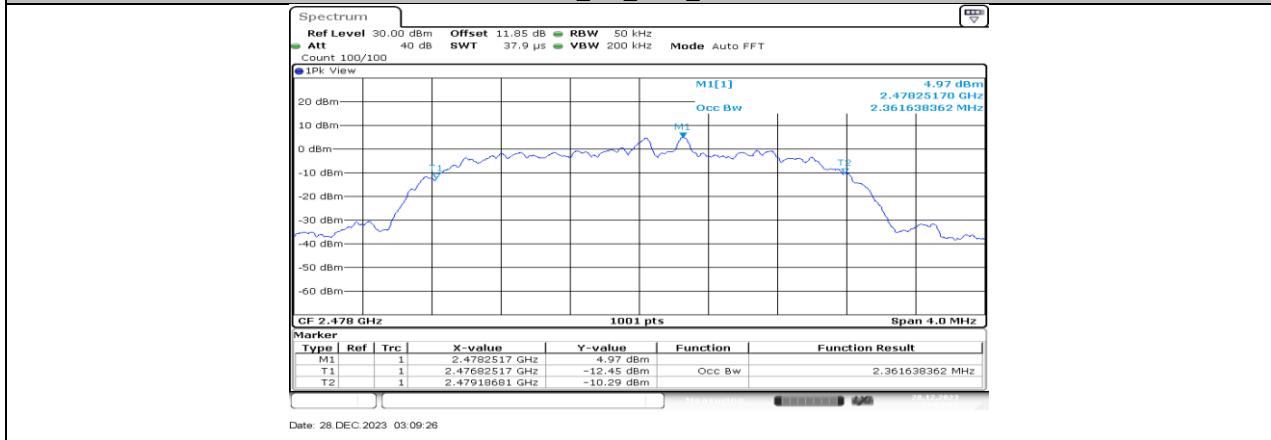

QHS\_6M\_Ant1\_2478

## 12.3. APPENDIX C2: MAXIMUM CONDUCTED OUTPUT POWER

### 12.3.1. Test Result

Test Mode	Antenna	Frequency[MHz]	Peak-Result[dBm]	Limit[dBm]	Verdict
QHS_2M	Ant1	2404	10.28	≤30	PASS
		2440	10.88	≤30	PASS
		2478	9.97	≤30	PASS
QHS_6M	Ant1	2404	10.36	≤30	PASS
		2440	11.01	≤30	PASS
		2478	10.12	≤30	PASS


Test Mode	Antenna	Frequency[MHz]	AVG-Result[dBm]	Limit[dBm]	Verdict
QHS_2M	Ant1	2404	10.12	≤30	PASS
		2440	10.34	≤30	PASS
		2478	9.87	≤30	PASS
QHS_6M	Ant1	2404	10.23	≤30	PASS
		2440	10.67	≤30	PASS
		2478	10.01	≤30	PASS


## 12.4. APPENDIX D2: MAXIMUM POWER SPECTRAL DENSITY

### 12.4.1. Test Result


Test Mode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
QHS_2M	Ant1	2404	-11.62	≤8.00	PASS
		2440	-11.07	≤8.00	PASS
		2478	-12.01	≤8.00	PASS
QHS_6M	Ant1	2404	-10.98	≤8.00	PASS
		2440	-10.34	≤8.00	PASS
		2478	-11.33	≤8.00	PASS

### 12.4.2. Test Graphs

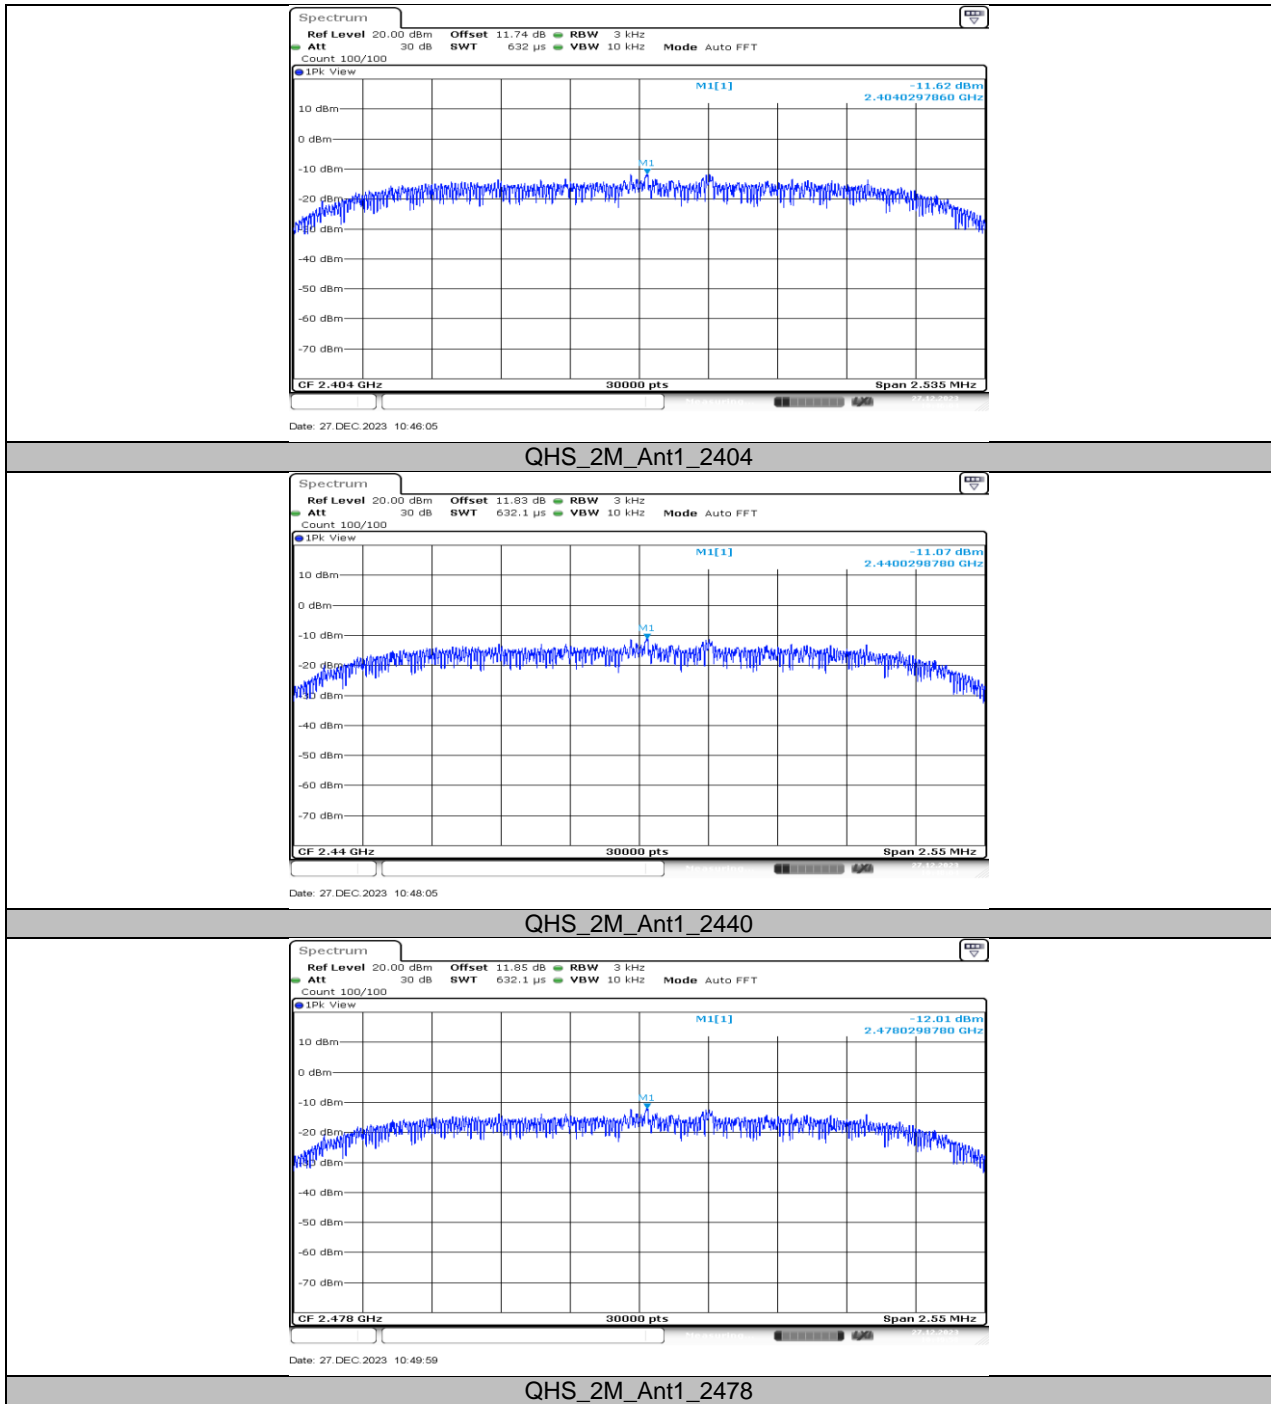


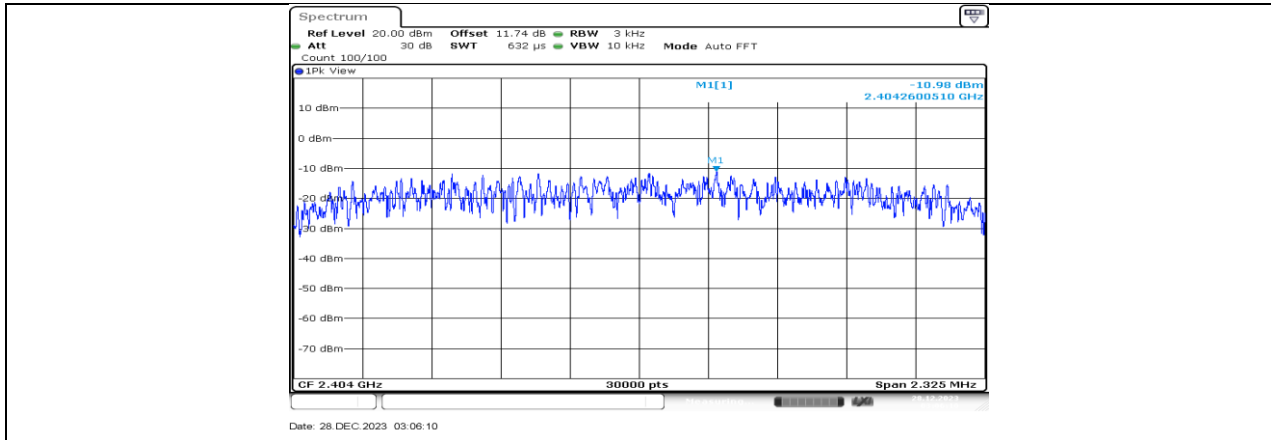

QHS\_6M\_Ant1\_2404

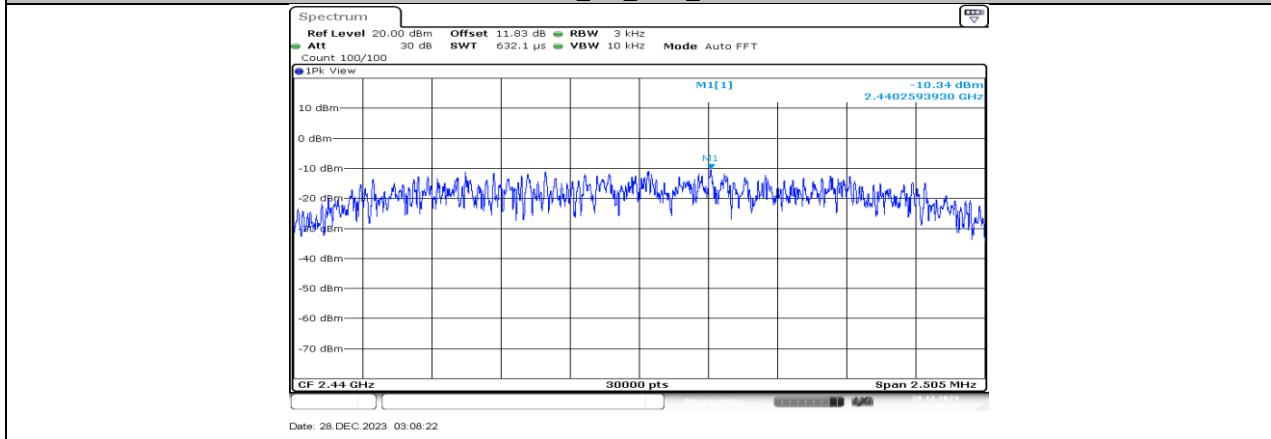

QHS\_6M\_Ant1\_2440

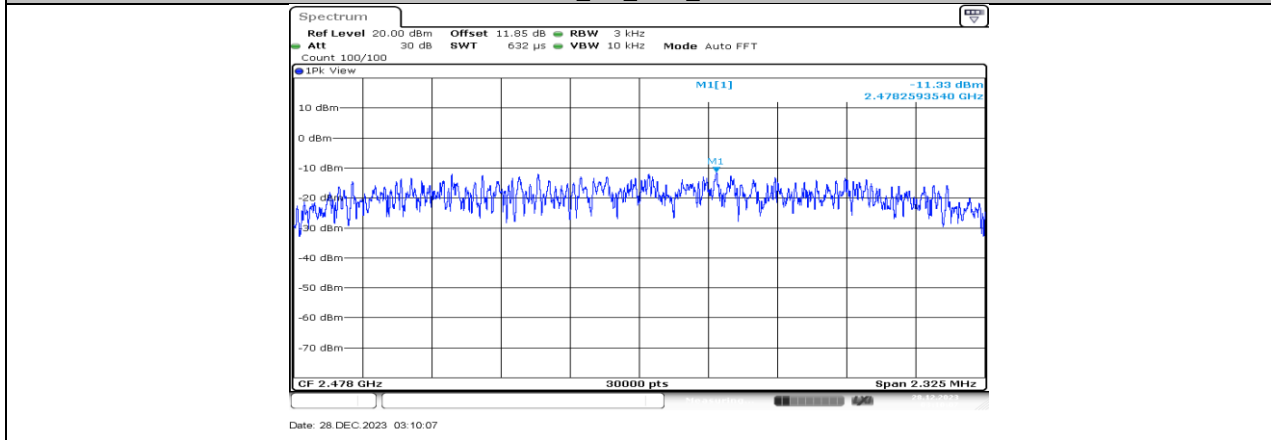




QHS\_6M\_Ant1\_2478


## 12.5. APPENDIX E2: BAND EDGE MEASUREMENTS

### 12.5.1. Test Result

Test Mode	Antenna	ChName	Frequency [MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
QHS_2M	Ant1	Low	2404	7.89	-44.79	$\leq -12.11$	PASS
		High	2478	7.29	-45.12	$\leq -12.71$	PASS
QHS_6M	Ant1	Low	2404	7.40	-43.87	$\leq -12.6$	PASS
		High	2478	7.03	-44.92	$\leq -12.97$	PASS

### 12.5.2. Test Graphs

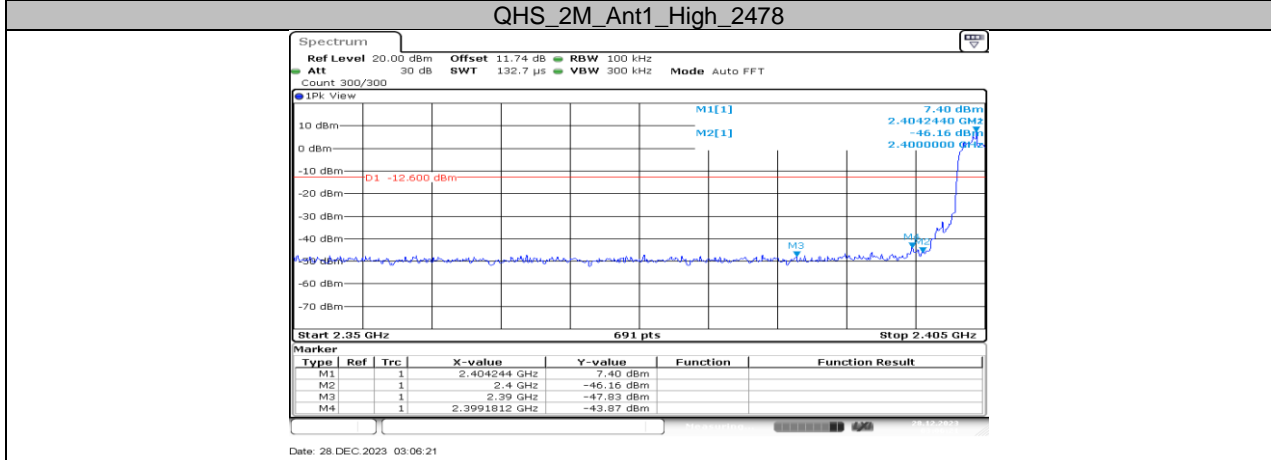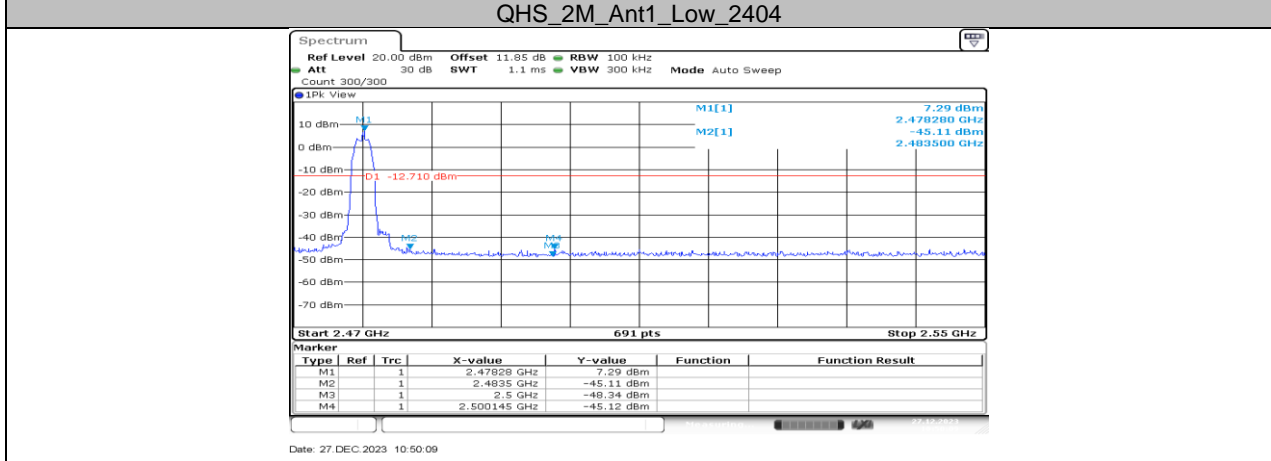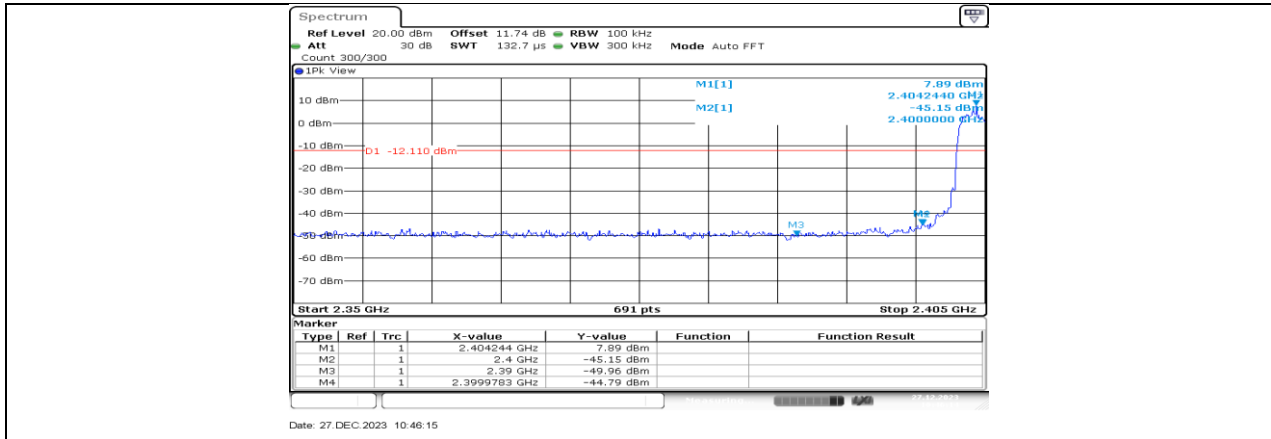

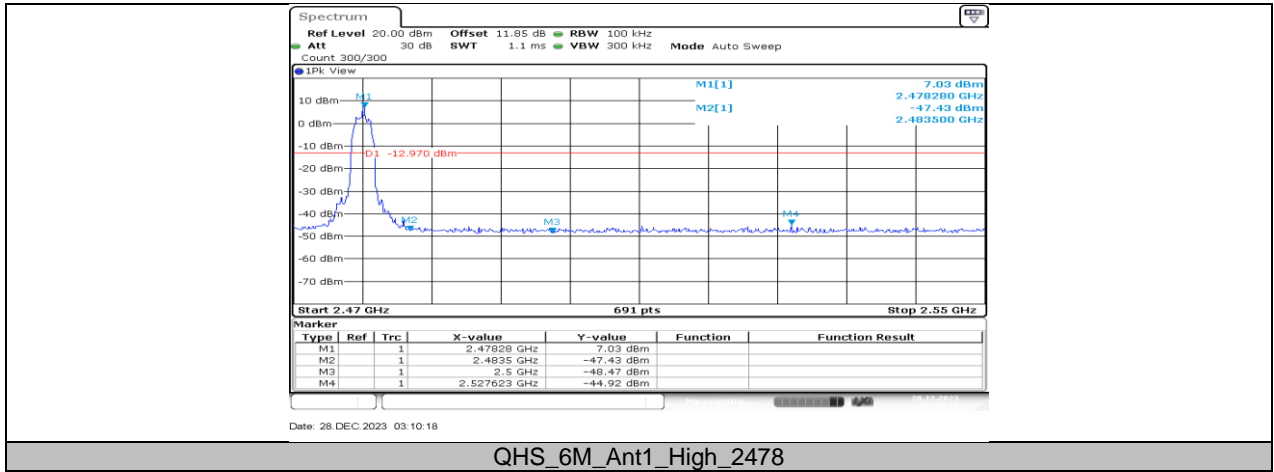





## 12.6. APPENDIX F2: CONDUCTED SPURIOUS EMISSION

### 12.6.1. Test Result


Test Mode	Antenna	Frequency[MHz]	FreqRange [MHz]	Result[dBm]	Limit[dBm]	Verdict
QHS_2M	Ant1	2404	Reference	7.86	---	PASS
			30~1000	-55.55	≤-12.14	PASS
			1000~26500	-50.41	≤-12.14	PASS
		2440	Reference	8.36	---	PASS
			30~1000	-55.35	≤-11.64	PASS
			1000~26500	-49.45	≤-11.64	PASS
		2478	Reference	7.47	---	PASS
			30~1000	-55.85	≤-12.53	PASS
			1000~26500	-49.59	≤-12.53	PASS
QHS_6M	Ant1	2404	Reference	7.37	---	PASS
			30~1000	-55.6	≤-12.63	PASS
			1000~26500	-50.75	≤-12.63	PASS
		2440	Reference	8.01	---	PASS
			30~1000	-55.36	≤-11.99	PASS
			1000~26500	-50.55	≤-11.99	PASS
		2478	Reference	7.07	---	PASS
			30~1000	-55.11	≤-12.93	PASS
			1000~26500	-50.23	≤-12.93	PASS

### 12.6.2. Test Graphs

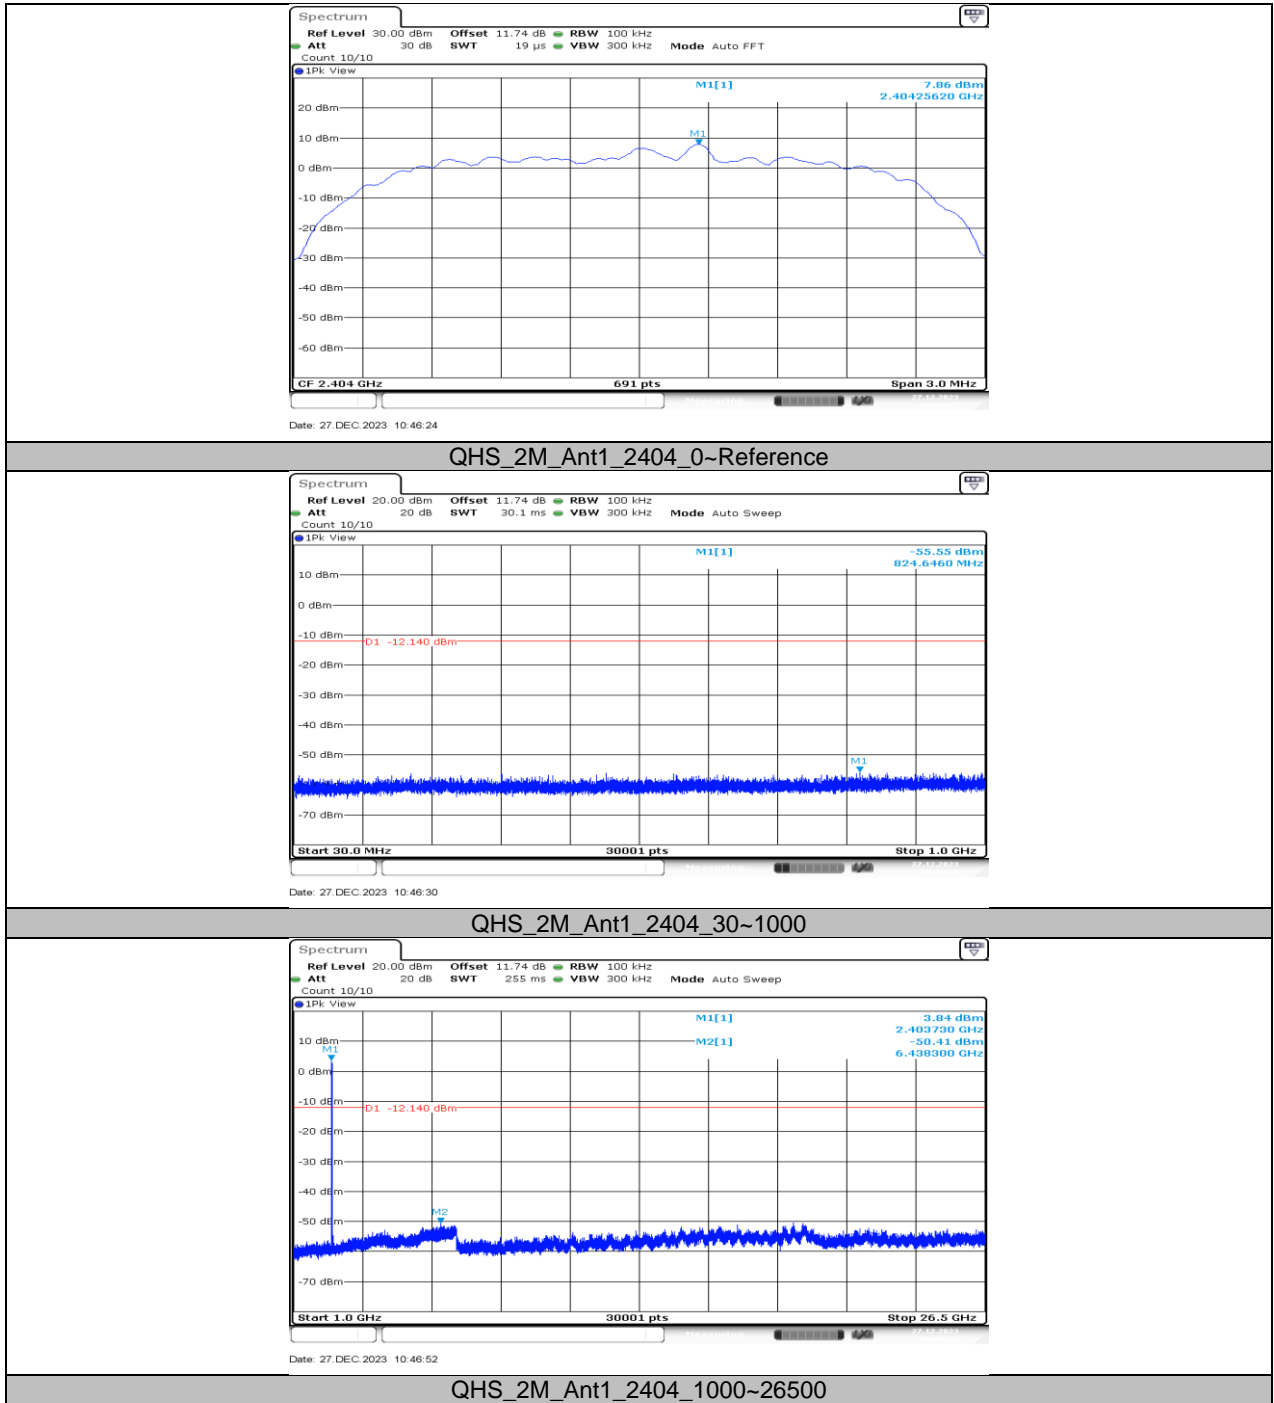


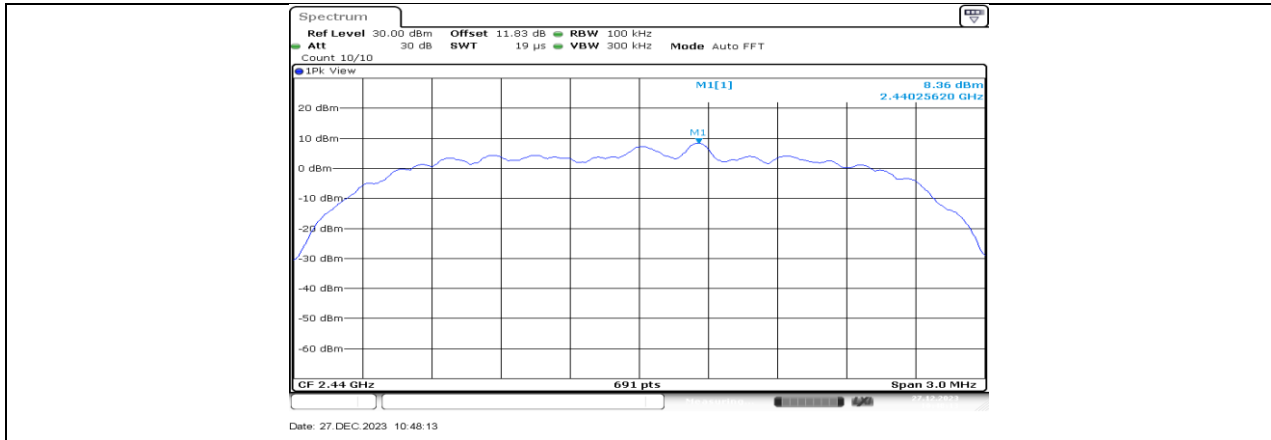


QHS\_2M\_Ant1\_2440\_0~Reference

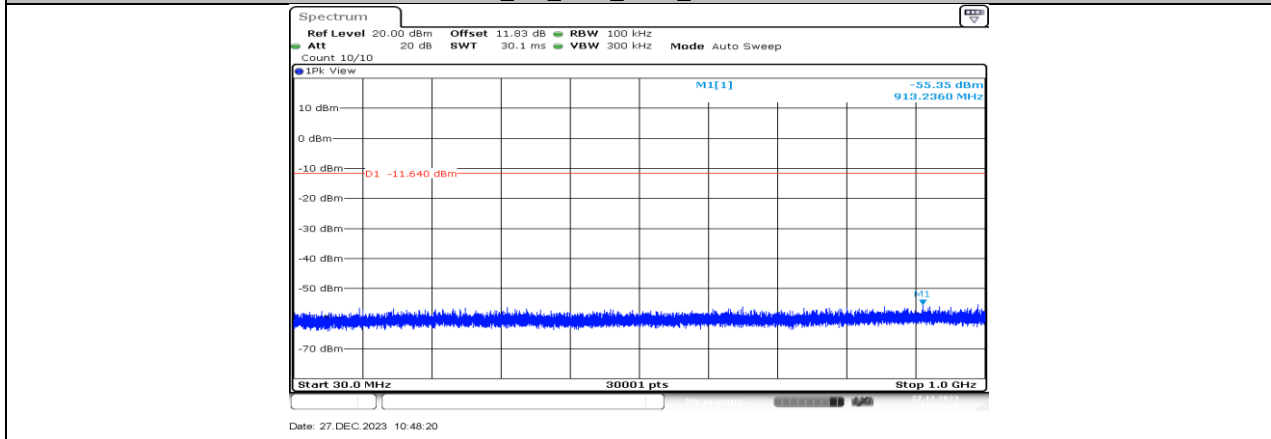



QHS\_2M\_Ant1\_2440\_30~1000

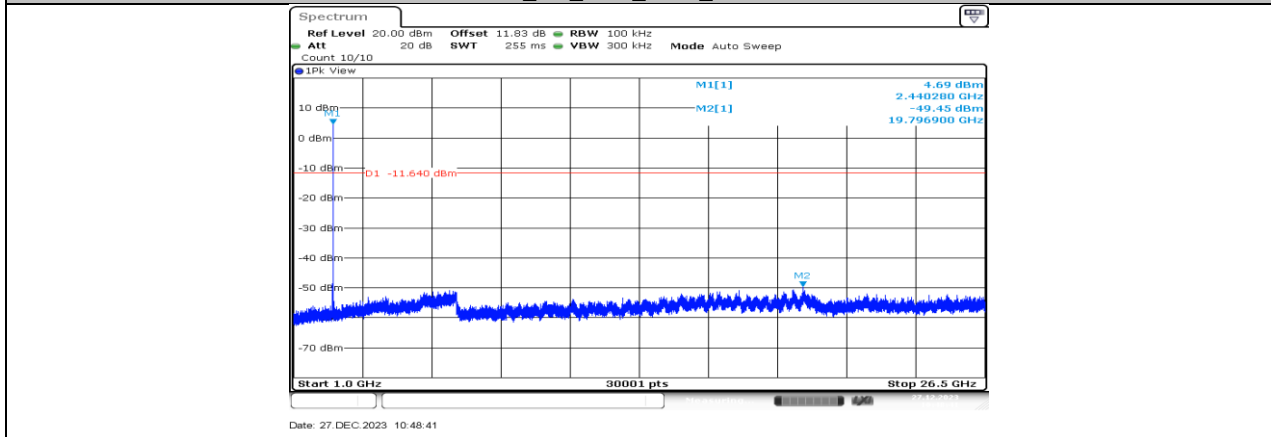


QHS\_2M\_Ant1\_2440\_1000~26500

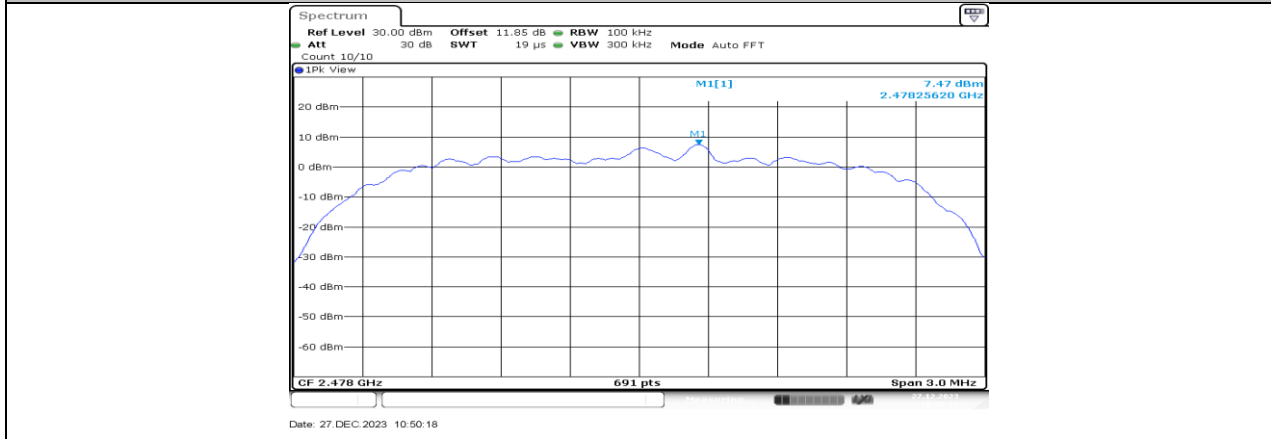

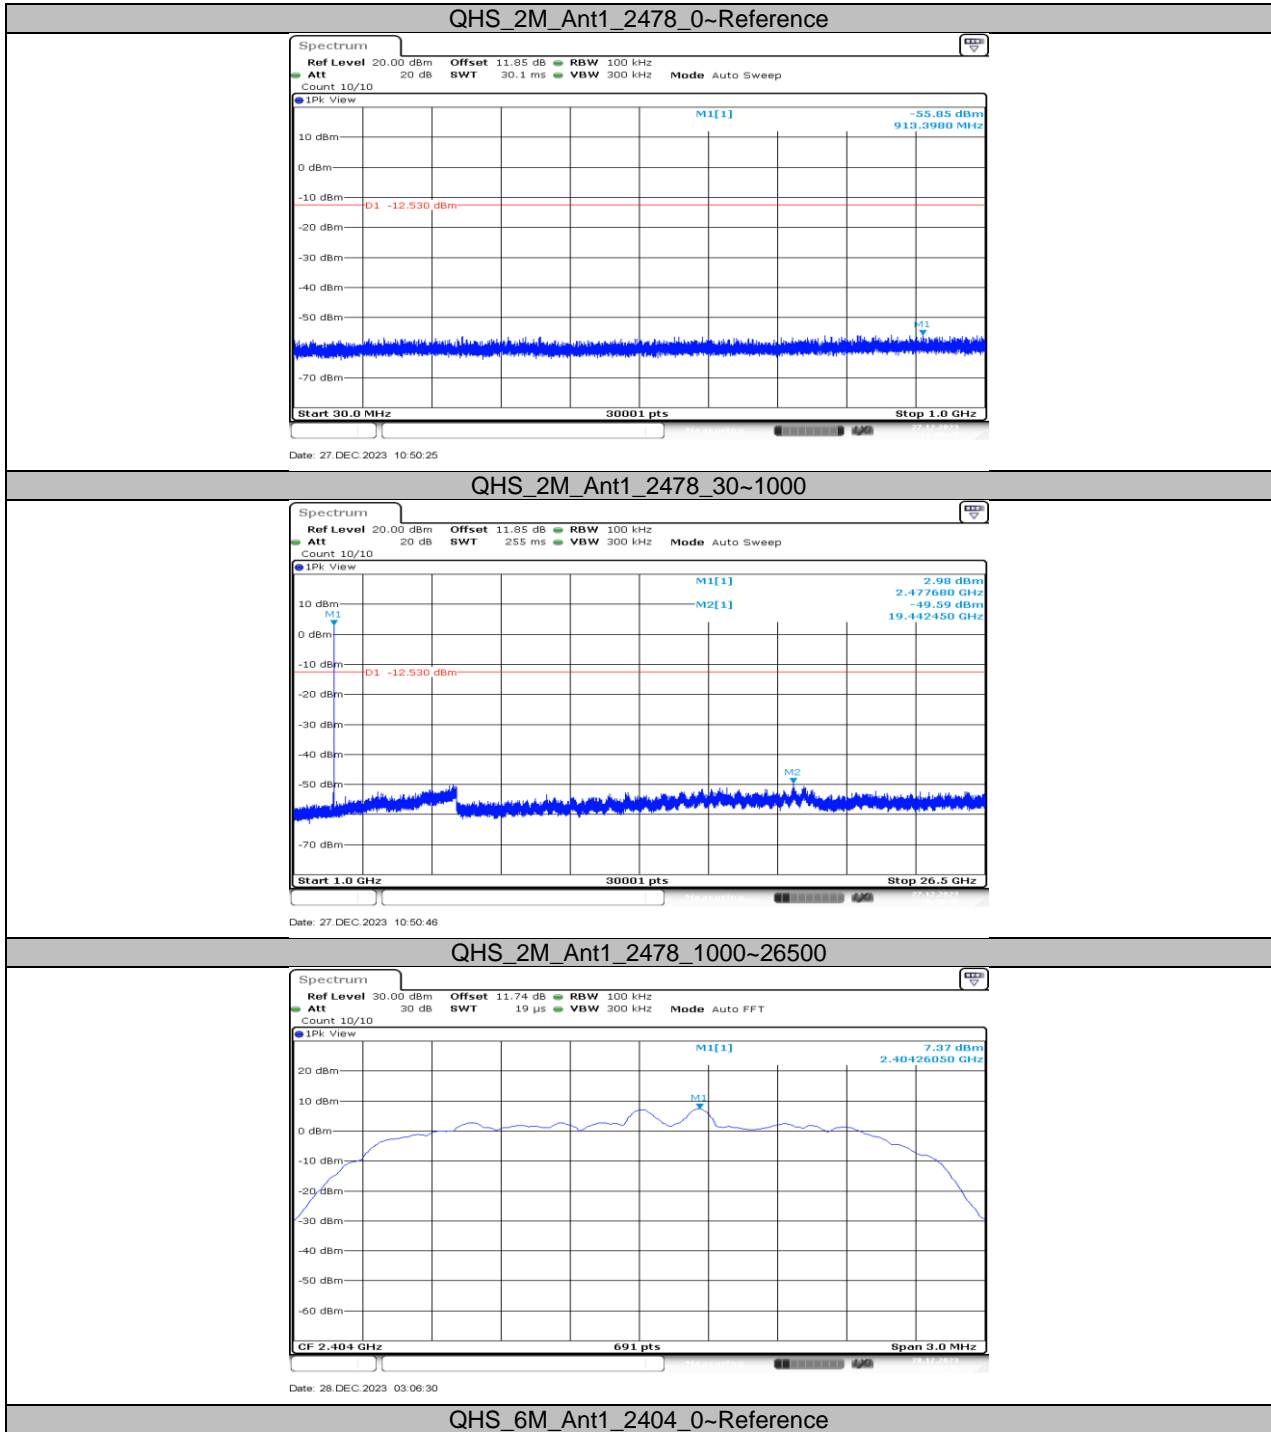


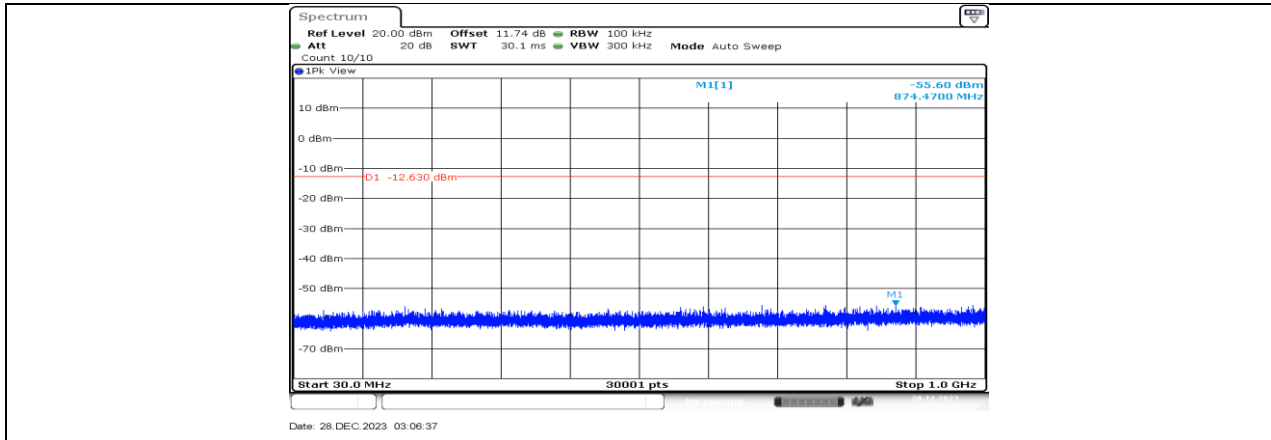


QHS\_6M\_Ant1\_2404\_30~1000

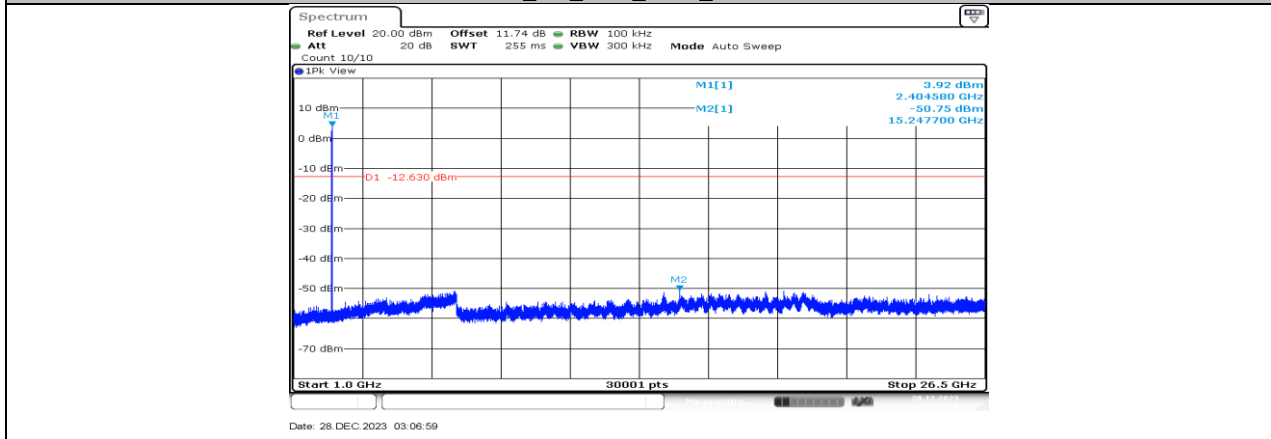



QHS\_6M\_Ant1\_2404\_1000~26500

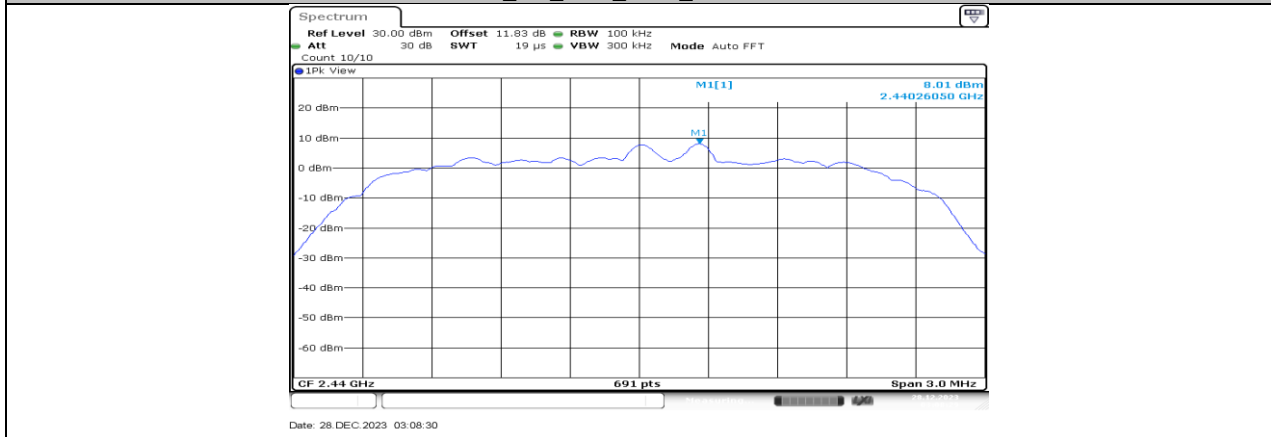

QHS\_6M\_Ant1\_2440\_0~Reference

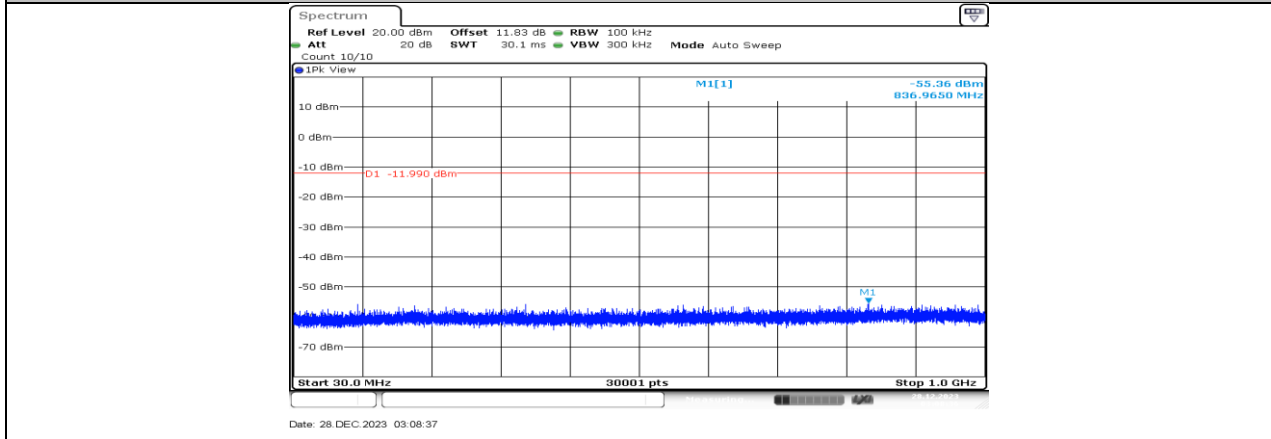

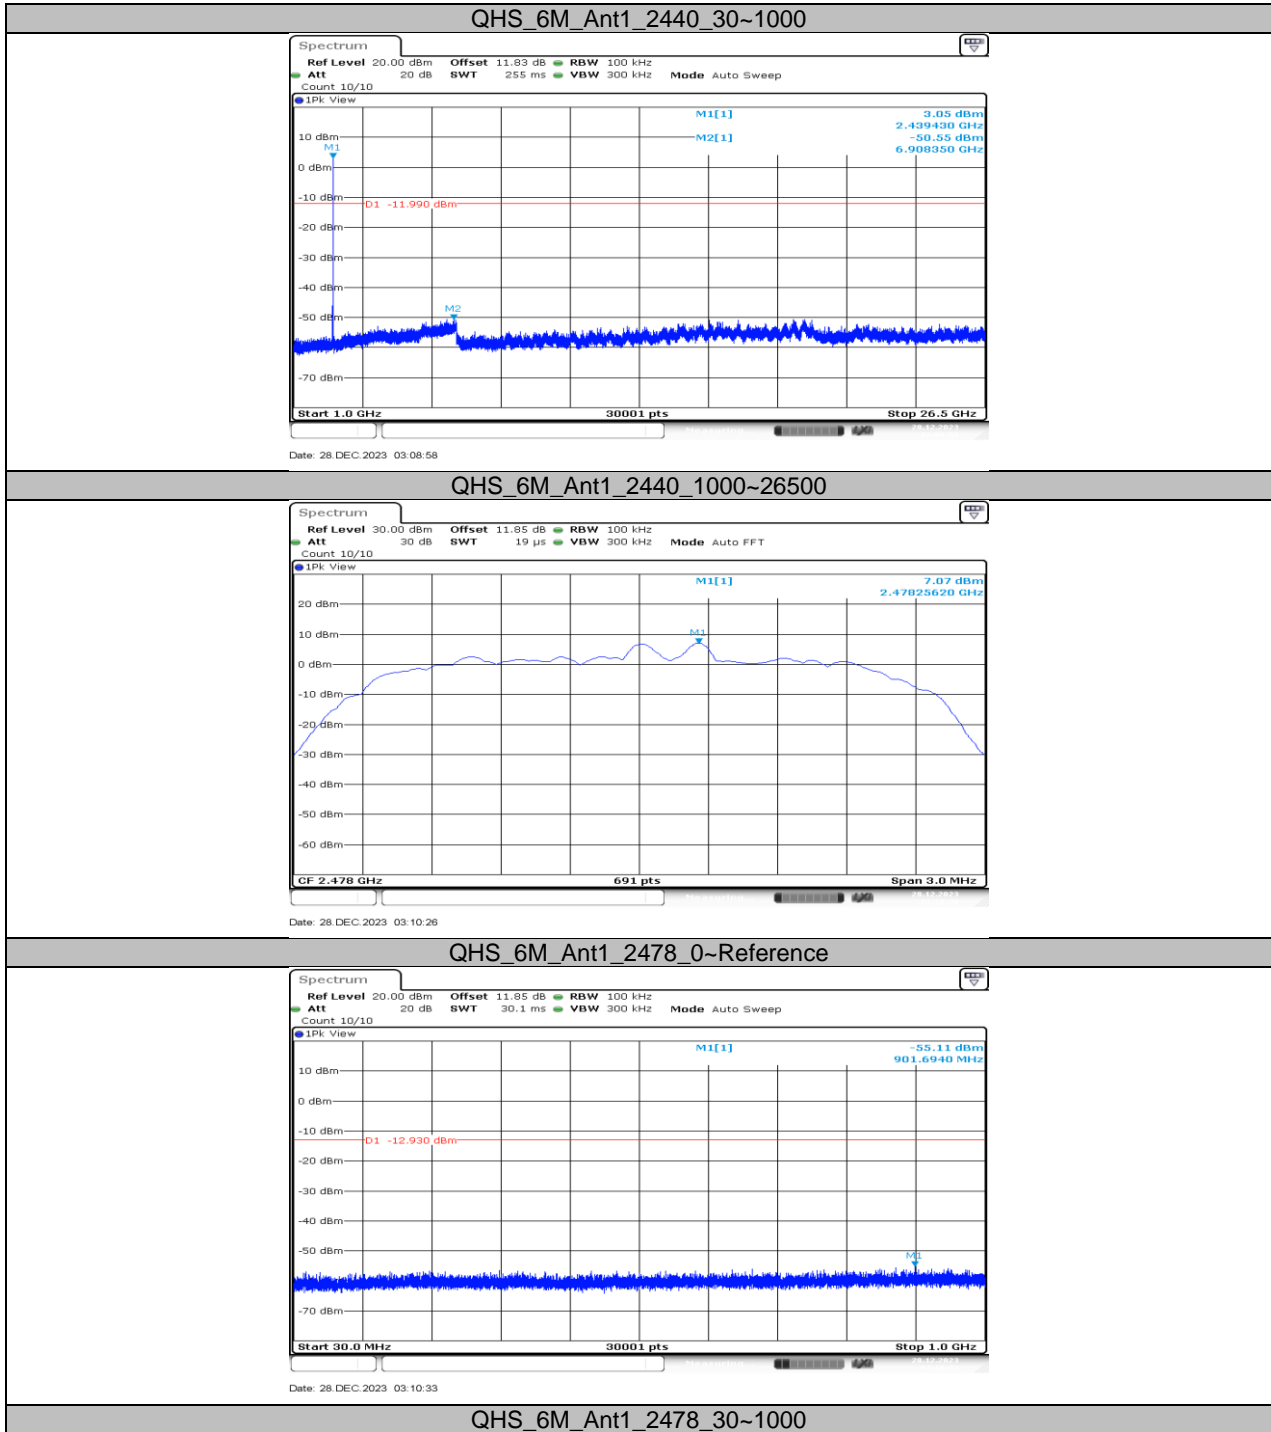

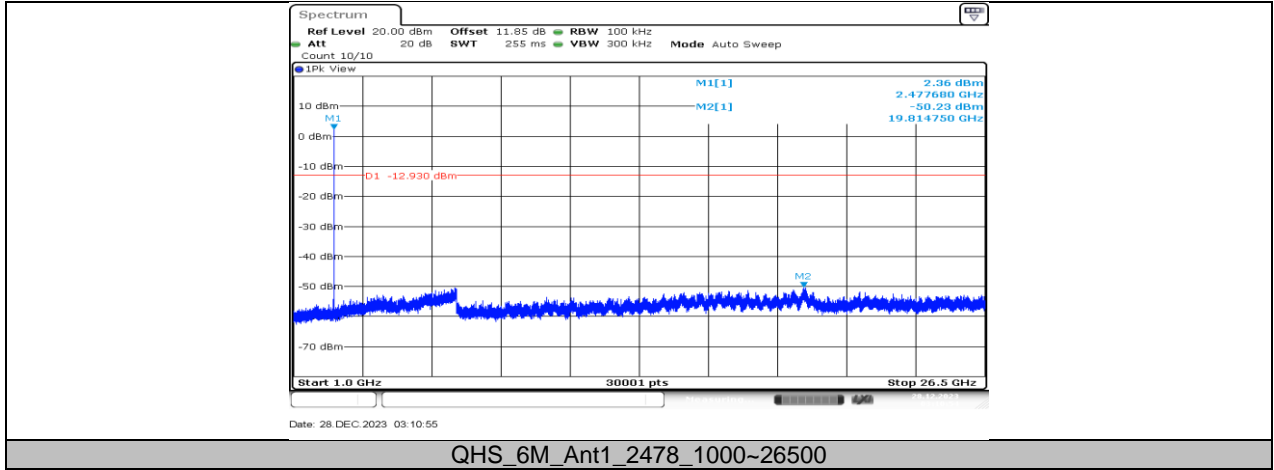

## 12.7. APPENDIX G2: DUTY CYCLE

### 12.7.1. Test Result

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
QHS_2M	4.16	4.97	0.8370	83.70	0.77	0.24	1
QHS_6M	1.42	2.47	0.5749	57.49	2.40	0.70	1

Note:

Duty Cycle Correction Factor=10log (1/x).


Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.



### 12.7.2. Test Graphs

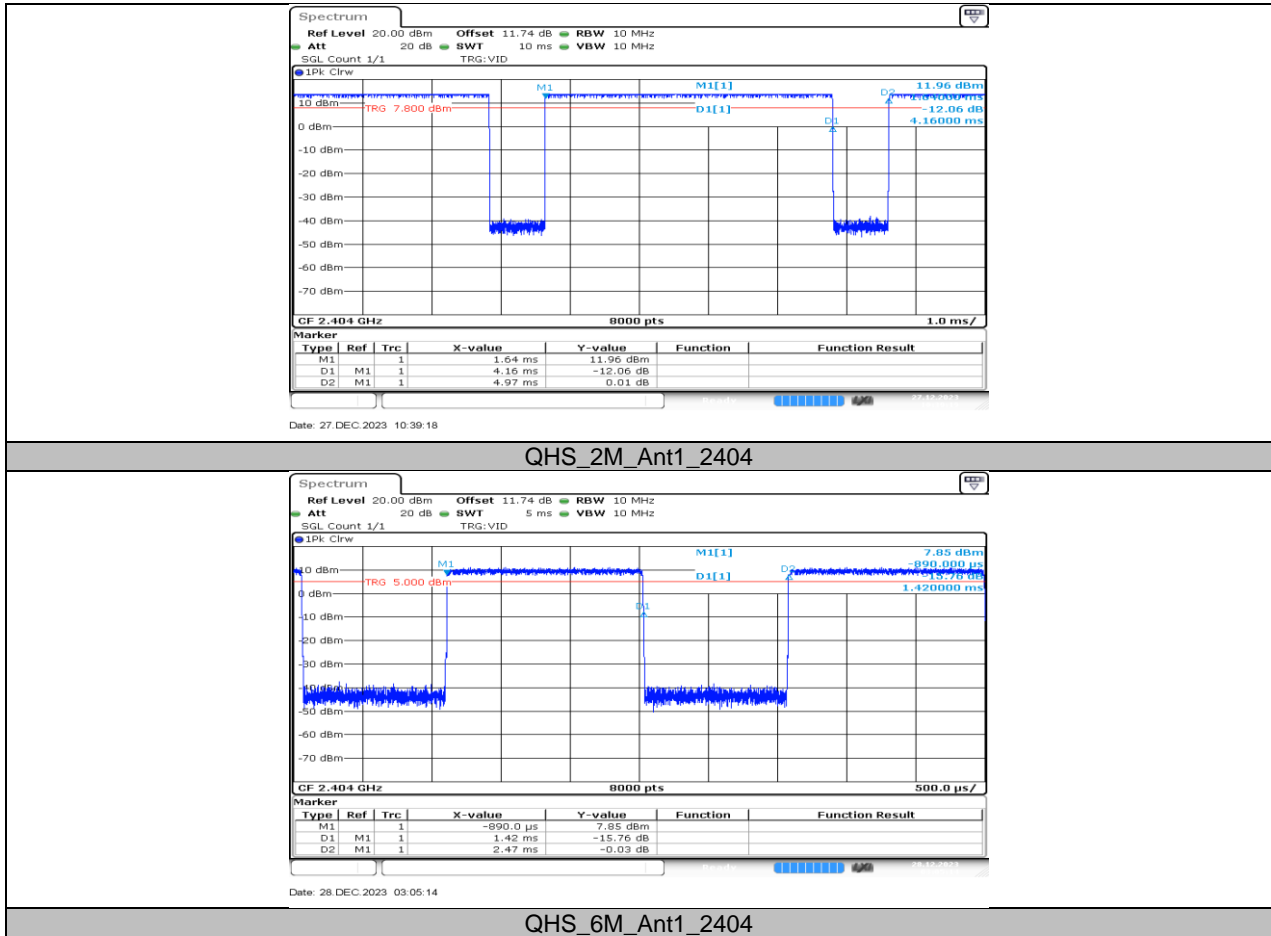

**END OF REPORT**