



683-3, Yubang-Dong, Yongin-Si, Kyunggi-Do, Korea. 449-080
 Tel: +82-31-321-2664 Fax: +82-31-321-1664
<http://www.digitalemc.com>

SAR TEST REPORT

Dates of Tests: December 16 ~ 31, 2004
 Test Report S/N:DR50110501E
 Test Site : DIGITAL EMC CO., LTD.

FCC ID

SBWVK250C

APPLICANT

VK Corporation**FCC Classification:****Licensed Portable Transmitter Held to Ear (PCE)****EUT Type:****Tri-Mode Dual-Band Analog/CDMA/PCS Phone****Model Name****VK250C****Test Device Serial No.:****Identical prototype****TX Frequency Range:****824.04 ~ 848.97 MHz (AMPS) / 824.70 ~ 848.31 MHz (CDMA)
 1851.25 ~ 1908.75 MHz (PCS)****RX Frequency Range:****869.04 ~ 893.97 MHz (AMPS) / 869.70 ~ 893.31 MHz (CDMA)
 1931.25 ~ 1988.75 MHz (PCS)****Max. RF Output Power:****0.347W ERP AMPS (25.4dBm) / 0.305W ERP CDMA (24.84dBm)
 0.264W EIRP PCS (24.22dBm)****Max. SAR Measurement:****1.390W/kg AMPS Head SAR / 1.260W/kg AMPS Body SAR
 1.080W/kg CDMA Head SAR / 0.987W/kg CDMA Body SAR
 0.523W/kg PCS Head SAR / 0.468W/kg PCS Body SAR****Application Type:****Certification****Rule Part(s):****§2.1093; FCC/OET Bulletin Supplement C[July 2001]****Data of issue:****December 31, 2004**

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE Std. C95.1-1992 and had been tested in accordance with the measurement procedures specified in FCC/OET Bulletin 65 Supplement C (2001) and IEEE Std. 1528-2003.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



D.M.JUNG (Manager)

TABLE OF CONTENTS

1. INTRODUCTION	3
SAR DEFINITION	3
2. SAR MEASUREMENT SETUP.....	4
Robotic System.....	4
System Hardware	4
System Electronics.....	4
3. DASY4 E-FIELD PROBE SYSTEM.....	5
Probe Measurement System.....	5
Probe Specifications	5
4. Probe Calibration Process.....	6
Dosimetric Assessment Procedure.....	6
Free Space Assessment	6
Temperature Assessment	6
5. PHANTOM & EQUIVALENT TISSUES.....	7
SAM Phantom	7
Brain & Muscle Simulating Mixture Characterization	7
Device Holder for Transmitters.....	7
6. TEST SYSTEM SPECIFICATIONS.....	8
Automated Test System Specifications.....	8
7. DOSIMETRIC ASSESSMENT & PHANTOM SPECS	9
Measurement Procedure.....	9
Specific Anthropomorphic Mannequin (SAM) Specifications.....	9
8. DEFINITION OF REFERENCE POINTS	10
EAR Reference Point.....	10
Handset Reference Points.....	10
9. TEST CONFIGURATION POSITIONS	11
Positioning for Cheek/Touch	11
Positioning for Ear /15° Tilt	12
Body Holster /Belt Clip Configurations	13
10. ICNIRP GUIDELINES RF EXPOSURE LIMITS.....	14
Uncontrolled Environment	14
Controlled Environment.....	14
11. MEASUREMENT UNCERTAINTIES.....	15
SAR Measurement Uncertainties	15
12. SYSTEM VERIFICATION.....	16-17
Tissue Verification.....	16
Test System Verification.....	17
13. SAR TEST DATA SUMMARY.....	18
See Measurement Result Data Pages	18
Procedures Used To Establish Test Signal	18
Device Test Conditions.....	18
EUT Handset Reference Points	18
14. SAR DATA SUMMARY.....	19-33
15. SAR TEST EQUIPMENT	34
Equipment Calibration.....	34
16. CONCLUSION.....	35
Measurement Conclusion.....	35
17. REFERENCES	36

1. INTRODUCTION/SAR DEFINITION

In 1974, the International Radiation Protection Association (IRPA) formed a working group on non-ionizing radiation (NIR), which examined the problems arising in the field of Protection against the various types of NIR. At the IRPA Congress in Paris in 1977, this working group became the International Non-Ionizing Radiation Committee (INIRC).

In cooperation with the Environmental Health Division of the World Health Organization (WHO), the IRPA/INIRC developed a number of health criteria documents on NIR as part of WHO'S Environmental Health Criteria Programme, sponsored by the United Nations Environment Programme (UNEP). Each document includes an overview of the physical characteristics, measurement and instrumentation, sources, and applications of NIR, a thorough review of the literature on biological effects, and an evaluation of the health risks of exposure to NIR. These health criteria have provided the scientific database for the subsequent development of exposure limits and codes of practice relating to NIR.

At the Eighth International Congress of the IRPA (Montreal, 18-22 May 1992), a new, independent scientific organization-the International Commission on Non-Ionizing Radiation Protection (ICNIRP)-was established as a successor to the IRPA/INIRC. The functions of the Commission are to investigate the hazards that may be associated with the different forms of NIR, develop international guidelines on NIR exposure to static and extremely-low-frequency (ELF) electric and magnetic field have been reviewed by UNEP/WHO/IRPA (1984, 1987). Those publications and a number of others, including UNEP/WHO/IRPA (1993) and Allen et al. (1991), provided the scientific rationale for these guidelines.

A glossary of terms appears in the Appendix.

SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ) It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Fig. 1.1)

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dV} \right)$$

Figure 1.1
SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = E^2 / \rho$$

Where:

- σ = conductivity of the tissue-simulant material (S/m)
- ρ = mass density of the tissue-simulant material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

2. SAR MEASUREMENT SETUP

Robotic System

Measurements are performed using the DASY4 automated dosimetric assessment system. The DASY4 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Staubli), robot controller, Pentium 4 computer, near-field probe, probe alignment sensor, and the generic twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig. 2.1).

System Hardware

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and a remote control used to drive the robot motors. The PC consists of the Micron Pentium 4 3.0 GHz computer with Windows 2000 system and SAR Measurement Software DASY4, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

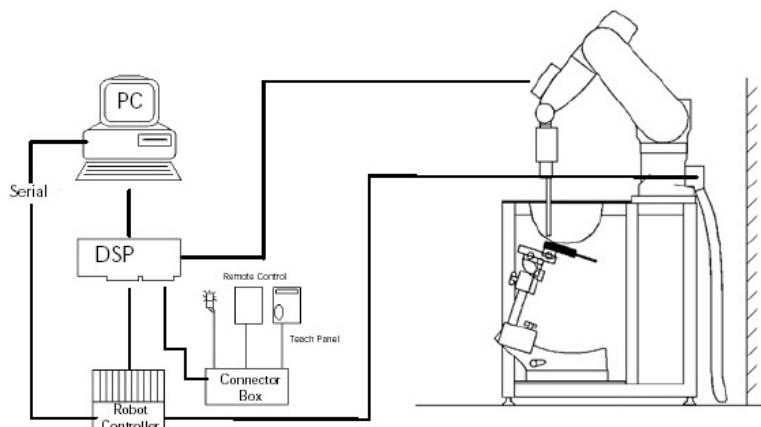


Figure 2.1 SAR Measurement System Setup

System Electronics

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in [7].

3. SAR MEASUREMENT SETUP

Probe Measurement System



The SAR measurements were conducted with the dosimetric probe ET3DV6, designed in the classical triangular configuration [7] (see Fig. 3.2) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multifiber line ending at the front of the probe tip (see Fig. 3.3). It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY4 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting (see Fig.3.1). The approach is stopped at reaching the maximum.

Figure 3.1 DAE System

Probe Specifications

Calibration:	In air from 10 MHz to 2.5 GHz
	In brain and muscle simulating tissue at
	Frequencies of 450 MHz, 835 MHz, 900 MHz
	1900MHz and 2450MHz
Frequency:	10MHz to > 3GHz; Linearity: $\pm 0.2\text{dB}$ (30 MHz to 3 GHz)
Dynamic:	5:W/g to >100mW/g;
Range:	Linearity: $\pm 0.2\text{dB}$
Dimensions:	Overall length: 330 mm Tip length :16mm Body diameter :12mm Tip diameter :6.8 mm Distance from probe tip to dipole centers:2.7mm
Application:	General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms




Figure 3.1 Triangular Probe Configuration



Figure 3.2 Probe Thick-Film Technique

4. Probe Calibration Process

Dosimetric Assessment Procedure

Each probe is calibrated according to a dosimetric assessment procedure described in [8] with accuracy better than +/- 10%. The spherical isotropy was evaluated with the procedure described in [9] and found to be better than +/-0.25dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe is tested.

Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz (see Fig. 4.1), and in a waveguide above 1GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity at the proper orientation with the field. The probe is then rotated 360 degrees.

Temperature Assessment *

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe (see Fig. 4.2).

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

where:

Δt = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

ΔT = temperature increase due to RF exposure.

$$\text{SAR} = \frac{|E|^2 \cdot \sigma}{\rho}$$

where:

σ = simulated tissue conductivity,

ρ = Tissue density (1.25 g/cm³ for brain tissue)

SAR is proportional to $\Delta T / \Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E- field;

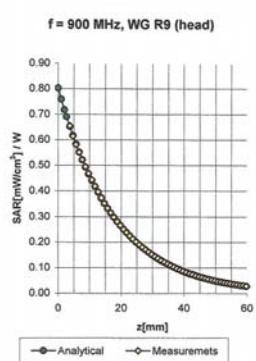


Figure 4.1 E-Field and Temperature Measurements at 900MHz[7]

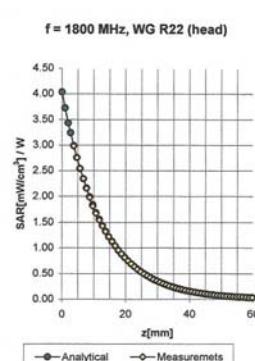


Figure 4.2 E-Field and Temperature Measurements at 1800MHz[7]

5. PHANTOM & EQUIVALENT TISSUES

SAM Phantom



Figure 5.1 SAM Twin Phantom

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users [11][12]. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (see Fig. 5.1)

Brain & Muscle Simulating Mixture Characterization



Figure 5.2 Simulated Tissue

The brain and muscle mixtures consist of a viscous gel using hydroxethylcellulose (HEC) gelling agent and saline solution (see Table 6.1). Preservation with a bactericide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 have been incorporated in the following table. Other head and body tissue parameters that have not been specified in P1528 are derived from the issue dielectric parameters computed from the 4-Cole-Cole equations. The mixture characterizations used for the brain and muscle tissue simulating liquids are according to the data by C. Gabriel and G. Hartsgrove [13].(see Fig. 5.2)

Table 5.1 Composition of the Brain & Muscle Tissue Equivalent Matter

INGREDIENTS	SIMULATING TISSUE			
	835MHz Brain	835MHz Muscle	1900MHz Brain	1900MHz Muscle
Mixture Percentage				
WATER	41.45	52.50	54.90	40.40
DGBE	0.000	0.000	44.92	0.000
SUGAR	56.00	45.00	0.000	58.00
SALT	1.450	1.400	0.180	0.500
BACTERICIDE	0.100	0.100	0.000	0.100
HEC	1.000	1.000	0.000	1.000
Dielectric Constant	Target	41.50	55.20	40.00
Conductivity (S/m)	Target	0.900	0.970	1.400
				1.520

Device Holder for Transmitters



Figure 5.2 Mounting Device

In combination with the SAM Twin Phantom V4.0, the Mounting Device (see Fig. 5.2) enables the rotation of the mounted transmitter in spherical coordinates where the rotation point is the ear opening. The devices can be easily, accurately, and repeatably be positioned according to the FCC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produce infinite number of configurations [12]. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.

6. TEST SYSTEM SPECIFICATIONS

Automated Test System Specifications

Positioner

Robot:	Stäubli Unimation Corp. Robot Model: RX60L
Repeatability:	0.02 mm
No. of axis:	6



Data Acquisition Electronic (DAE) System Cell Controller

Processor:	Pentium 4
Clock Speed:	3.0 GHz
Operating System:	Window 2000 Professional

Data Converter

Features:	Signal, multiplexer, A/D converter. & control logic
Software:	DASY4
Connecting Lines :	Optical downlink for data and status info Optical uplink for commands and clock

Figure 6.1 DASY4 Test System

PC Interface Card

Function:	24 bit (64 MHz) DSP for real time processing Link to DAE 3
	16 bit A/D converter for surface detection system serial link to robot direct emergency stop output for robot

E-Field Probes

Model:	ET3DV6 S/N: 1702
Construction:	Triangular core fiber optic detection system
Frequency:	10 MHz to 6 GHz
Linearity:	$\pm 0.2\text{dB}$ (30MHz to 3GHz)

Phantom

Phantom:	SAM Twin Phantom (V4.0)
Shell Material :	Vivac Composite
Thickness:	$2.0 \pm 0.2 \text{ mm}$

7. DOSIMETRIC ASSESSMENT & PHANTOM SPECS

Measurement Procedure

The evaluation was performed using the following procedure:

1. The SAR measurement was taken at a selected spatial reference point to monitor power variations during testing. This fixed location point was measured and used as a reference value.
2. The SAR distribution at the exposed side of the head was measured at a distance of 3.9mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 10mm x 10mm.
3. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation. Around this point, a volume of 32mm x 32mm x 34mm (fine resolution volume scan, zoom scan) was assessed by measuring 7 x 7 x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see Fig. 7.1):
 - a. The data at the surface was extrapolated, since the center of the dipoles is 2.7mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. The extrapolation was based on a least square algorithm [15]. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
 - b. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions) [15][16]. The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as procedure #1, was re-measured. If the value changed by more than 5%, the evaluation is repeated.




Figure 7.1 Sample SAR Area Scan

Specific Anthropomorphic Mannequin (SAM) Specifications

The phantom for handset SAR assessment testing is a low-loss dielectric shell, with shape and dimensions derived from the anthropometric data of the 90th percentile adult male head dimensions as tabulated by the US Army. The SAM Twin Phantom shell is bisected along the mid-sagittal plane into right and left halves (see Fig. 7.2). The perimeter sidewalls of each phantom halves are extended to allow filling with liquid to a depth that is sufficient to minimize reflections from the upper surface. The liquid depth is maintained at a minimum depth of 15cm to minimize reflections from the upper surface.



Figure 7.2 SAM Twin Phantom shell

8. DEFINITION OF REFERENCE POINTS

EAR Reference Point




Figure 8.2 Close-up side view of ERPs

Figure 8.1 shows the front, back and side views of the SAM Twin Phantom. The point "M" is the reference point for the center of the mouth, "LE" is the left ear reference point(ERP), and "RE" is the right ERP. The ERPs are 15mm posterior to the entrance to the Ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 9.2. The plane Passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck- Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 8.2). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5]



Figure 8.1 Front, back and side view of SAM Twin Phantom

Handset Reference Points

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the "test device reference point" located along the "vertical centerline" on the front of the device aligned to the "ear reference point" (See Fig. 8.3). The "test device reference point" was than located at the same level as the center of the ear reference point. The test device was positioned so that the "vertical centerline" was bisecting the front surface of the handset at it's top and bottom edges, positioning the "ear reference point" on the outer surface of the both the left and right head phantoms on the ear reference point.

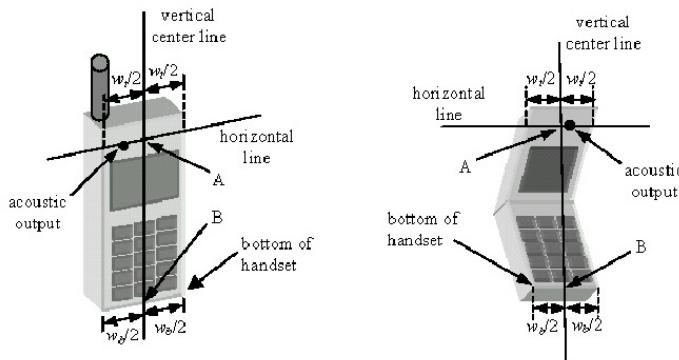


Figure 8.3 Handset Vertical Center & Horizontal Line Reference Points

9. TEST CONFIGURATION POSITIONS

Positioning for Cheek/Touch

1. The test device was positioned with the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.

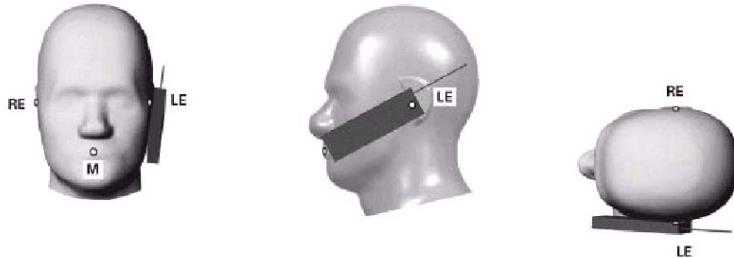


Figure 9.1 Front, Side and Top View of Cheek/Touch Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the ear.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the plane normal to MB-NF including the line MB (reference plane).
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, the handset was rotated about the line NF until any point on the handset made contact with a phantom point below the ear (cheek). See Figure 9.2)




Figure 9.2 Side view w/ relevant markings

9. TEST CONFIGURATION POSITIONS(Continued)

Positioning for Ear / 15° Tilt

With the test device aligned in the “Cheek/Touch Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15degree.
2. The phone was then rotated around the horizontal line by 15 degree.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the phone touches the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. The tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 9.3).

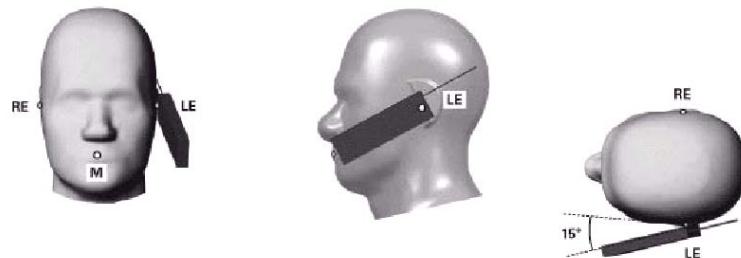


Figure 9.3 Front, Side and Top View of Ear/15° Tilt Position




Figure 9.4 Side view w/ relevant markings

9. TEST CONFIGURATION POSITIONS (Continued)

Body Holster /Belt Clip Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.5). A device with a headset output is tested with a headset connected to the device. Body dielectric parameters are used.

Accessories for Body- worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are supplied with the device, the device is tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.



Figure 9.5 Body Belt Clip & Holster Configurations

Body-worn accessories may not always be supplied or available as options for some Devices intended to be authorized for body-worn use. In this case, a test configuration Where a separation distance between the back of the device and the flat phantom is used. All test position spacings are documented.

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessory(ies), including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

In all cases SAR measurements are performed to investigate the worst-case positioning. Worst-case positioning is then documented and used to perform Body SAR testing. In order for users to be aware of the body-worn operating requirements for meeting RF exposure compliance, operating instructions and cautions statements are included in the user's manual.

10. ICNIRP GUIDELINES RF EXPOSURE LIMITS

Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 10.1. Safety Limits for Partial Body Exposure [2]

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)
Whole-Body average SAR (W/kg)	1.60	8.00
Localized SAR (head and trunk) (W/kg)	0.08	0.40
Localized SAR (limbs) (W/kg)	4.00	20.00

1 The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

2 The Spatial Average value of the SAR averaged over the whole body.

3 The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

11. ANSI/IEC C95.1 – 1992 RF EXPOSURE LIMITS

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	ci 1 1g	Standard unc. (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 4.8	normal	1	1	± 4.8%	∞
Axial isotropy	± 4.7	rectangular	$\sqrt{3}$	$(1-c_p)^{1/2}$	± 1.9%	∞
Hemispherical isotropy	± 9.6	rectangular	$\sqrt{3}$	$(c_p)^{1/2}$	± 3.9%	∞
Boundary effects	± 8.3	rectangular	$\sqrt{3}$	1	± 4.8%	∞
Linearity	± 4.7	rectangular	$\sqrt{3}$	1	± 2.7%	∞
System Detection limits	± 1.0	rectangular	$\sqrt{3}$	1	± 0.6%	∞
Readout Electronics	± 1.0	normal	1	1	± 1.0%	∞
Response time	± 0.8	rectangular	$\sqrt{3}$	1	± 0.5%	∞
Integration time	± 1.4	rectangular	$\sqrt{3}$	1	± 0.8%	∞
RF ambient conditions	± 3.0	rectangular	$\sqrt{3}$	1	± 1.7%	∞
Probe Positioner Mechanical Tolerance	± 0.4	rectangular	$\sqrt{3}$	1	± 0.2%	∞
Probe Positioning with respect to Phantom Shell	± 2.9	rectangular	$\sqrt{3}$	1	± 1.7%	∞
Extrapolation, Interpolation and Interpolation Algorithms for Max. SAR Evaluation	± 3.9	rectangular	$\sqrt{3}$	1	± 2.3%	∞
Test Sample Related						
Test Sample positioning	± 6.0	normal	1	1	± 6.0%	11
Device holder uncertainty	± 5.0	normal	1	1	± 5.0%	7
Power drift	± 5.0	rectangular	$\sqrt{3}$	1	± 2.9%	∞
Phantom and Tissue Parameters						
Phantom uncertainty(shape and thickness tolerances)	± 4.0	rectangular	$\sqrt{3}$	1	± 2.3%	∞
Liquid conductivity Target -	± 5.0	rectangular	$\sqrt{3}$	0.6	± 1.7%	∞
Liquid conductivity Measurement uncertainty	± 10.0	rectangular	$\sqrt{3}$	0.6	± 3.5%	∞
Liquid permittivity Target - tolerance	± 5.0	rectangular	$\sqrt{3}$	0.6	± 1.7%	∞
Liquid permittivity Measurement uncertainty	± 5.0	rectangular	$\sqrt{3}$	0.6	± 1.7%	∞
Combined Standard Uncertainty						±13.2%
Coverage Factor for 95%						Kp=2
Expanded Uncertainty(k=2)						±26.4%

The above measurement uncertainties are according to IEEE Std. 1528-2003

12. SYSTEM VERIFICATION

Tissue Verification

Table 12.1 Simulated Tissue Verification [5]

MEASURED TISSUE PARAMETERS						
Date(s)	Target Frequency	Liquid Temp.(°C)	Dielectric constant: ϵ		Conductivity: σ	
			Target	Measured	Target	Measured
Dec. 16, 2004	D-835V2, S/N: 464	21.9	41.5	43.0	0.90	0.914
Dec. 17, 2004	D-835V2, S/N: 464	21.5	41.5	43.0	0.90	0.914
Dec. 18, 2004	D-835V2, S/N: 464	21.7	41.5	43.0	0.90	0.914
Dec. 20, 2004	D-835V2, S/N: 464	21.3	41.5	42.6	0.90	0.914
Dec. 21, 2004	D-835V2, S/N: 464	22.0	41.5	42.6	0.90	0.914
Dec. 24, 2004	D-1900V2, S/N: 5d029	21.3	53.3	54.2	1.52	1.520
Dec. 27, 2004	D-1900V2, S/N: 5d029	21.3	40.0	39.8	1.4	1.450
Dec. 28, 2004	D-1900V2, S/N: 5d029	21.5	40.0	39.8	1.4	1.450
Dec. 29, 2004	D-1900V2, S/N: 5d029	21.5	40.0	39.8	1.4	1.450
Dec. 30, 2004	D-835V2, S/N: 464	21.3	55.2	54.5	0.97	1.01
Dec. 31, 2004	D-835V2, S/N: 464	21.5	55.2	54.5	0.97	1.01

Test System Validation

Prior to assessment, the system is verified to the $\pm 10\%$ of the specifications at 835MHz and 1900MHz by using the system validation kit(s). (Graphic Plots Attached)

Table 12.2 System Validation [5]

SYSTEM DIPOLE VALIDATION TARGET & MEASURED					
(All values are normalized to a forward power of 1/4W.)					
Date(s)	System Validation Kit:	Target Frequency	Targeted SAR _{1g} (mW/g)	Measured SAR _{1g} (mW/g)	Deviation (%)
Dec. 16, 2004	D-835V2, S/N: 464	835MHz Brain	2.375	2.54	6.9
Dec. 17, 2004	D-835V2, S/N: 464	835MHz Brain	2.375	2.53	6.5
Dec. 18, 2004	D-835V2, S/N: 464	835MHz Brain	2.375	2.56	7.8
Dec. 20, 2004	D-835V2, S/N: 464	835MHz Brain	2.375	2.57	8.2
Dec. 21, 2004	D-835V2, S/N: 464	835MHz Brain	2.375	2.58	8.6
Dec. 24, 2004	D-1900V2, S/N: 5d029	1900MHz Muscle	9.925	10.5	5.8
Dec. 27, 2004	D-1900V2, S/N: 5d029	1900MHz Brain	9.925	10.3	3.8
Dec. 28, 2004	D-1900V2, S/N: 5d029	1900MHz Brain	9.925	10.4	4.8
Dec. 29, 2004	D-1900V2, S/N: 5d029	1900MHz Brain	9.925	10.3	3.8
Dec. 30, 2004	D-835V2, S/N: 464	835MHz Muscle	2.375	2.59	9.1
Dec. 31, 2004	D-835V2, S/N: 464	835MHz Muscle	2.375	2.59	9.1

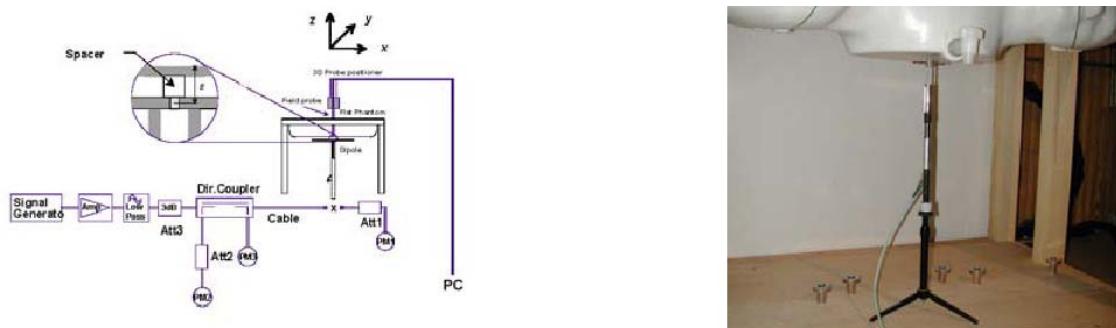


Figure 12.1 Dipole Validation Test Setup

13. SAR TEST DATA SUMMARY

See Measurement Result Data Pages

Procedures Used To Establish Test Signal

The handset was placed into simulated call mode (AMPS, Cellular CDMA, PCS CDMA) using manufacturers test codes. Such test signals offer a consistent means for testing SAR and are recommended for evaluating SAR [4]. When test modes are not available or inappropriate for testing a handset, the actual transmission is activated through a base station simulator or similar equipment. See data pages for actual procedure used in measurement.

Device Test Conditions

The handset is battery operated. Each SAR measurement was taken with a fully charged battery.

In order to verify that the device was tested at full power, conducted output power measurements were performed before and after each SAR measurement to confirm the output power. If a conducted power deviation of more than 5% occurred, the test was repeated.

EUT Handset Reference Points



Figure 13.1 handset Reference Points

Horizontal Center Line

ERP – Ear Reference Point

Vertical Center Line

14. SAR DATA SUMMARY

Mixture Type : 835MHZ Brain

14.1 MEASUREMENT RESULTS (AMPS Head SAR)								
FREQUENCY		Begin/End POWER [dBm]		Battery Type	Device Test Position	Antenna Position	Slide Position	SAR (W/kg)
MHz	Ch							
824.04	991	26.01	26.02	Standard	Right Cheek/Touch	IN	Down	1.040
835.89	363	26.02	25.94	Standard	Right Cheek/Touch	IN	Down	0.781
848.97	799	26.06	26.05	Standard	Right Cheek/Touch	IN	Down	0.751
824.04	991	26.07	26.03	Standard	Right Ear/15° Tilt	IN	Down	0.795
835.89	363	26.01	25.80	Standard	Right Ear/15° Tilt	IN	Down	0.619
848.97	799	26.04	25.90	Standard	Right Ear/15° Tilt	IN	Down	0.620
824.04	991	26.10	26.04	Standard	Left Cheek/Touch	IN	Down	0.992
835.89	363	26.04	25.80	Standard	Left Cheek/Touch	IN	Down	0.827
848.97	799	26.10	26.03	Standard	Left Cheek/Touch	IN	Down	0.756
824.04	991	26.02	26.02	Standard	Left Ear/15° Tilt	IN	Down	0.830
835.89	363	26.08	25.94	Standard	Left Ear/15° Tilt	IN	Down	0.714
848.97	799	26.09	26.05	Standard	Left Ear/15° Tilt	IN	Down	0.637
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		

NOTE:

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Prior to testing the conducted output power was measured.
4. The EUT is tested 2nd hot-spot peak, if it is less than 2dB below the highest peak and with a peak SAR value greater than 0.5W/kg.
5. Battery is fully charged for all readings.
6. Test Signal Call Mode Continuous Tx On Manu.Test Codes Base Station Simulator
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15.1 cm. \pm 0.1



D.M.JUNG (Manager)

14. SAR DATA SUMMARY(Continue)

Mixture Type : 835MHZ Brain

14.2 MEASUREMENT RESULTS (AMPS Head SAR)								
FREQUENCY		Begin/End POWER [dBm]		Battery Type	Device Test Position	Antenna Position	Slide Position	SAR (W/kg)
MHz	Ch							
824.04	991	26.09	25.97	Standard	Right Cheek/Touch	IN	Up	0.218
835.89	363	26.07	25.81	Standard	Right Cheek/Touch	IN	Up	0.185
848.97	799	26.07	26.04	Standard	Right Cheek/Touch	IN	Up	0.162
824.04	991	26.08	26.09	Standard	Right Ear/15° Tilt	IN	Up	0.170
835.89	363	25.97	25.72	Standard	Right Ear/15° Tilt	IN	Up	0.109
848.97	799	26.03	25.80	Standard	Right Ear/15° Tilt	IN	Up	0.078
824.04	991	26.07	26.01	Standard	Left Cheek/Touch	IN	Up	0.322
835.89	363	26.09	25.84	Standard	Left Cheek/Touch	IN	Up	0.258
848.97	799	26.00	25.99	Standard	Left Cheek/Touch	IN	Up	0.245
824.04	991	26.07	26.07	Standard	Left Ear/15° Tilt	IN	Up	0.210
835.89	363	26.08	26.04	Standard	Left Ear/15° Tilt	IN	Up	0.151
848.97	799	26.10	26.05	Standard	Left Ear/15° Tilt	IN	Up	0.106
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		

NOTE:

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Prior to testing the conducted output power was measured.
4. The EUT is tested 2nd hot-spot peak, if it is less than 2dB below the highest peak and with a peak SAR value greater than 0.5W/kg.
5. Battery is fully charged for all readings.
6. Test Signal Call Mode Continuous Tx On Manu.Test Codes Base Station Simulator
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15.1 cm. \pm 0.1



D.M.JUNG (Manager)

14. SAR DATA SUMMARY(Continue)

Mixture Type : 835MHZ Brain

14.3 MEASUREMENT RESULTS (AMPS Head SAR)								
FREQUENCY		Begin/End POWER [dBm]		Battery Type	Device Test Position	Antenna Position	Slide Position	SAR (W/kg)
MHz	Ch							
824.04	991	26.06	26.08	Standard	Right Cheek/Touch	Out	Down	1.300
835.89	363	26.06	25.95	Standard	Right Cheek/Touch	Out	Down	1.100
848.97	799	26.09	26.10	Standard	Right Cheek/Touch	Out	Down	0.909
824.04	991	26.08	26.07	Standard	Right Ear/15° Tilt	Out	Down	1.140
835.89	363	26.06	25.84	Standard	Right Ear/15° Tilt	Out	Down	0.841
848.97	799	26.05	26.07	Standard	Right Ear/15° Tilt	Out	Down	0.695
824.04	991	26.04	25.89	Standard	Left Cheek/Touch	Out	Down	1.390
835.89	363	26.00	25.77	Standard	Left Cheek/Touch	Out	Down	1.140
848.97	799	26.04	26.02	Standard	Left Cheek/Touch	Out	Down	0.952
824.04	991	26.06	26.03	Standard	Left Ear/15° Tilt	Out	Down	1.18
835.89	363	25.98	25.88	Standard	Left Ear/15° Tilt	Out	Down	0.979
848.97	799	25.98	26.07	Standard	Left Ear/15° Tilt	Out	Down	0.785
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		

NOTE:

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Prior to testing the conducted output power was measured.
4. The EUT is tested 2nd hot-spot peak, if it is less than 2dB below the highest peak and with a peak SAR value greater than 0.5W/kg.
5. Battery is fully charged for all readings.
6. Test Signal Call Mode Continuous Tx On Manu.Test Codes Base Station Simulator
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15.1 cm. \pm 0.1



D.M.JUNG (Manager)

14. SAR DATA SUMMARY(Continue)

Mixture Type : 835MHZ Brain

14.4 MEASUREMENT RESULTS (AMPS Head SAR)								
FREQUENCY		Begin/End POWER [dBm]		Battery Type	Device Test Position	Antenna Position	Slide Position	SAR (W/kg)
MHz	Ch							
824.04	991	26.09	25.80	Standard	Right Cheek/Touch	Out	Up	0.752
835.89	363	25.97	25.95	Standard	Right Cheek/Touch	Out	Up	0.577
848.97	799	26.10	26.31	Standard	Right Cheek/Touch	Out	Up	0.538
824.04	991	26.10	26.03	Standard	Right Ear/15° Tilt	Out	Up	0.497
835.89	363	26.06	25.80	Standard	Right Ear/15° Tilt	Out	Up	0.352
848.97	799	26.06	26.06	Standard	Right Ear/15° Tilt	Out	Up	0.251
824.04	991	26.06	26.12	Standard	Left Cheek/Touch	Out	Up	0.910
835.89	363	25.97	25.80	Standard	Left Cheek/Touch	Out	Up	0.694
848.97	799	26.13	26.12	Standard	Left Cheek/Touch	Out	Up	0.563
824.04	991	26.10	26.01	Standard	Left Ear/15° Tilt	Out	Up	0.466
835.89	363	26.01	25.81	Standard	Left Ear/15° Tilt	Out	Up	0.409
848.97	799	26.06	26.04	Standard	Left Ear/15° Tilt	Out	Up	0.271
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		

NOTE:

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Prior to testing the conducted output power was measured.
4. The EUT is tested 2nd hot-spot peak, if it is less than 2dB below the highest peak and with a peak SAR value greater than 0.5W/kg.
5. Battery is fully charged for all readings.
6. Test Signal Call Mode Continuous Tx On Manu.Test Codes Base Station Simulator
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15.1 cm. \pm 0.1



D.M.JUNG (Manager)

14. SAR DATA SUMMARY(Continue)

Mixture Type : 835MHZ Muscle

14.5 MEASUREMENT RESULTS (AMPS Body SAR)								
FREQUENCY		Begin/End POWER [dBm]		Battery Type	Device Test Position	Antenna Position	Slide Position	SAR (W/kg)
MHz	Ch							
824.04	991	26.09	26.07	Standard	1.5cm[w/o Holster]	IN	Down	0.718
835.89	363	26.06	25.93	Standard	1.5cm[w/o Holster]	IN	Down	0.713
848.97	799	26.08	25.81	Standard	1.5cm[w/o Holster]	IN	Down	0.675
824.04	991	26.01	25.87	Standard	1.5cm[w/o Holster]	IN	Up	0.562
835.89	363	26.14	25.98	Standard	1.5cm[w/o Holster]	IN	Up	0.626
848.97	799	26.08	25.90	Standard	1.5cm[w/o Holster]	IN	Up	0.659
824.04	991	26.10	25.90	Standard	1.5cm[w/o Holster]	Out	Down	1.260
835.89	363	26.07	25.78	Standard	1.5cm[w/o Holster]	Out	Down	1.260
848.97	799	26.14	26.03	Standard	1.5cm[w/o Holster]	Out	Down	1.250
824.04	991	26.15	26.03	Standard	1.5cm[w/o Holster]	Out	Up	1.120
835.89	363	26.07	25.94	Standard	1.5cm[w/o Holster]	Out	Up	1.100
848.97	799	26.10	25.90	Standard	1.5cm[w/o Holster]	Out	Up	0.704
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		

NOTE:

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Prior to testing the conducted output power was measured.
4. The EUT is tested 2nd hot-spot peak, if it is less than 2dB below the highest peak and with a peak SAR value greater than 0.5W/kg.
5. Battery is fully charged for all readings.
6. Test Signal Call Mode Continuous Tx On Manu.Test Codes Base Station Simulator
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15.1 cm. \pm 0.1



D.M.JUNG (Manager)

14. SAR DATA SUMMARY(Continue)

Mixture Type : 835MHZ Brain

14.6 MEASUREMENT RESULTS (CDMA Head SAR)								
FREQUENCY		Begin/End POWER [dBm]		Battery Type	Device Test Position	Antenna Position	Slide Position	SAR (W/kg)
MHz	Ch							
824.70	1013	25.06	25.01	Standard	Right Cheek/Touch	IN	Down	0.767
835.89	363	25.06	25.05	Standard	Right Cheek/Touch	IN	Down	0.648
848.31	777	25.04	25.01	Standard	Right Cheek/Touch	IN	Down	0.629
824.70	1013	25.00	24.93	Standard	Right Ear/15° Tilt	IN	Down	0.581
835.89	363	25.03	25.02	Standard	Right Ear/15° Tilt	IN	Down	0.490
848.31	777	25.07	24.95	Standard	Right Ear/15° Tilt	IN	Down	0.477
824.70	1013	25.09	24.97	Standard	Left Cheek/Touch	IN	Down	0.975
835.89	363	25.06	24.03	Standard	Left Cheek/Touch	IN	Down	0.692
848.31	777	25.10	25.02	Standard	Left Cheek/Touch	IN	Down	0.684
824.70	1013	25.10	25.06	Standard	Left Ear/15° Tilt	IN	Down	0.708
835.89	363	25.03	25.00	Standard	Left Ear/15° Tilt	IN	Down	0.593
848.31	777	25.07	25.01	Standard	Left Ear/15° Tilt	IN	Down	0.595
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		

NOTE:

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Prior to testing the conducted output power was measured.
4. The EUT is tested 2nd hot-spot peak, if it is less than 2dB below the highest peak and with a peak SAR value greater than 0.5W/kg.
5. Battery is fully charged for all readings.
6. Test Signal Call Mode Continuous Tx On Manu.Test Codes Base Station Simulator
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15.1 cm. \pm 0.1



D.M.JUNG (Manager)

14. SAR DATA SUMMARY(Continue)

Mixture Type : 835MHZ Brain

14.7 MEASUREMENT RESULTS (CDMA Head SAR)								
FREQUENCY		Begin/End POWER [dBm]		Battery Type	Device Test Position	Antenna Position	Slide Position	SAR (W/kg)
MHz	Ch							
824.70	1013	25.06	25.06	Standard	Right Cheek/Touch	IN	Up	0.222
835.89	363	25.06	25.00	Standard	Right Cheek/Touch	IN	Up	0.170
848.31	777	25.06	24.95	Standard	Right Cheek/Touch	IN	Up	0.156
824.70	1013	25.09	24.96	Standard	Right Ear/15° Tilt	IN	Up	0.145
835.89	363	25.04	25.01	Standard	Right Ear/15° Tilt	IN	Up	0.104
848.31	777	25.04	25.00	Standard	Right Ear/15° Tilt	IN	Up	0.090
824.70	1013	25.08	25.03	Standard	Left Cheek/Touch	IN	Up	0.274
835.89	363	25.08	25.07	Standard	Left Cheek/Touch	IN	Up	0.212
848.31	777	25.07	25.08	Standard	Left Cheek/Touch	IN	Up	0.200
824.70	1013	25.04	25.00	Standard	Left Ear/15° Tilt	IN	Up	0.141
835.89	363	25.04	25.01	Standard	Left Ear/15° Tilt	IN	Up	0.126
848.31	777	25.08	24.96	Standard	Left Ear/15° Tilt	IN	Up	0.107
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		

NOTE:

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Prior to testing the conducted output power was measured.
4. The EUT is tested 2nd hot-spot peak, if it is less than 2dB below the highest peak and with a peak SAR value greater than 0.5W/kg.
5. Battery is fully charged for all readings.
6. Test Signal Call Mode Continuous Tx On Manu.Test Codes Base Station Simulator
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15.1 cm. \pm 0.1



D.M.JUNG (Manager)

14. SAR DATA SUMMARY(Continue)

Mixture Type : 835MHZ Brain

14.8 MEASUREMENT RESULTS (CDMA Head SAR)								
FREQUENCY		Begin/End POWER [dBm]		Battery Type	Device Test Position	Antenna Position	Slide Position	SAR (W/kg)
MHz	Ch							
824.70	1013	25.00	24.95	Standard	Right Cheek/Touch	Out	Down	0.932
835.89	363	25.04	24.97	Standard	Right Cheek/Touch	Out	Down	0.876
848.31	777	25.06	25.00	Standard	Right Cheek/Touch	Out	Down	0.796
824.70	1013	25.01	24.96	Standard	Right Ear/15° Tilt	Out	Down	0.779
835.89	363	25.04	25.01	Standard	Right Ear/15° Tilt	Out	Down	0.734
848.31	777	25.09	25.00	Standard	Right Ear/15° Tilt	Out	Down	0.617
824.70	1013	25.03	25.04	Standard	Left Cheek/Touch	Out	Down	1.080
835.89	363	25.04	25.02	Standard	Left Cheek/Touch	Out	Down	0.951
848.31	777	25.08	25.03	Standard	Left Cheek/Touch	Out	Down	0.894
824.70	1013	25.03	25.03	Standard	Left Ear/15° Tilt	Out	Down	0.945
835.89	363	25.03	25.03	Standard	Left Ear/15° Tilt	Out	Down	0.856
848.31	777	25.05	25.01	Standard	Left Ear/15° Tilt	Out	Down	0.733
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		

NOTE:

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Prior to testing the conducted output power was measured.
4. The EUT is tested 2nd hot-spot peak, if it is less than 2dB below the highest peak and with a peak SAR value greater than 0.5W/kg.
5. Battery is fully charged for all readings.
6. Test Signal Call Mode Continuous Tx On Manu.Test Codes Base Station Simulator
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15.1 cm. \pm 0.1



D.M.JUNG (Manager)

14. SAR DATA SUMMARY(Continue)

Mixture Type : 835MHZ Brain

14.9 MEASUREMENT RESULTS (CDMA Head SAR)								
FREQUENCY		Begin/End POWER [dBm]		Battery Type	Device Test Position	Antenna Position	Slide Position	SAR (W/kg)
MHz	Ch							
824.70	1013	25.08	25.00	Standard	Right Cheek/Touch	Out	Up	0.670
835.89	363	25.03	24.99	Standard	Right Cheek/Touch	Out	Up	0.580
848.31	777	25.10	25.06	Standard	Right Cheek/Touch	Out	Up	0.514
824.70	1013	25.04	25.05	Standard	Right Ear/15° Tilt	Out	Up	0.448
835.89	363	25.08	24.95	Standard	Right Ear/15° Tilt	Out	Up	0.363
848.31	777	25.09	24.98	Standard	Right Ear/15° Tilt	Out	Up	0.249
824.70	1013	25.10	24.97	Standard	Left Cheek/Touch	Out	Up	0.627
835.89	363	25.03	24.97	Standard	Left Cheek/Touch	Out	Up	0.290
848.31	777	25.04	24.95	Standard	Left Cheek/Touch	Out	Up	0.290
824.70	1013	25.04	25.03	Standard	Left Ear/15° Tilt	Out	Up	0.417
835.89	363	25.07	25.01	Standard	Left Ear/15° Tilt	Out	Up	0.329
848.31	777	25.10	25.02	Standard	Left Ear/15° Tilt	Out	Up	0.269
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		

NOTE:

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Prior to testing the conducted output power was measured.
4. The EUT is tested 2nd hot-spot peak, if it is less than 2dB below the highest peak and with a peak SAR value greater than 0.5W/kg.
5. Battery is fully charged for all readings.
6. Test Signal Call Mode Continuous Tx On Manu.Test Codes Base Station Simulator
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15.1 cm. \pm 0.1



D.M.JUNG (Manager)

14. SAR DATA SUMMARY(Continue)

Mixture Type: 835MHZ Muscle

14.10 MEASUREMENT RESULTS (CDMA Body SAR)								
FREQUENCY		Begin/End POWER [dBm]		Battery Type	Device Test Position	Antenna Position	Slide Position	SAR (W/kg)
MHz	Ch							
824.70	1013	25.08	25.06	Standard	1.5cm[w/o Holster]	IN	Down	0.899
835.89	363	25.08	25.07	Standard	1.5cm[w/o Holster]	IN	Down	0.802
848.31	777	25.04	25.02	Standard	1.5cm[w/o Holster]	IN	Down	0.724
824.70	1013	25.02	25.04	Standard	1.5cm[w/o Holster]	IN	Up	0.547
835.89	363	25.08	25.05	Standard	1.5cm[w/o Holster]	IN	Up	0.430
848.31	777	25.08	25.04	Standard	1.5cm[w/o Holster]	IN	Up	0.421
824.70	1013	25.02	25.01	Standard	1.5cm[w/o Holster]	Out	Down	0.987
835.89	363	25.08	25.02	Standard	1.5cm[w/o Holster]	Out	Down	0.962
848.31	777	25.08	25.06	Standard	1.5cm[w/o Holster]	Out	Down	0.814
824.70	1013	25.09	25.06	Standard	1.5cm[w/o Holster]	Out	Up	0.895
835.89	363	25.01	24.95	Standard	1.5cm[w/o Holster]	Out	Up	0.750
848.31	777	25.06	25.05	Standard	1.5cm[w/o Holster]	Out	Up	0.696
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		

NOTE:

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Prior to testing the conducted output power was measured.
4. The EUT is tested 2nd hot-spot peak, if it is less than 2dB below the highest peak and with a peak SAR value greater than 0.5W/kg.
5. Battery is fully charged for all readings.
6. Test Signal Call Mode Continuous Tx On Manu.Test Codes Base Station Simulator
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15.1 cm. \pm 0.1



D.M.JUNG (Manager)

14. SAR DATA SUMMARY(Continue)

Mixture Type : 1900MHZ Brain

14.11 MEASUREMENT RESULTS (PCS Head SAR)								
FREQUENCY		Begin/End POWER [dBm]		Battery Type	Device Test Position	Antenna Position	Slide Position	SAR (W/kg)
MHz	Ch							
1851.25	0025	24.09	23.87	Standard	Right Cheek/Touch	IN	Down	0.097
1880.00	0600	24.09	23.86	Standard	Right Cheek/Touch	IN	Down	0.056
1908.75	1175	24.06	24.01	Standard	Right Cheek/Touch	IN	Down	0.058
1851.25	0025	24.06	23.96	Standard	Right Ear/15° Tilt	IN	Down	0.198
1880.00	0600	24.01	23.96	Standard	Right Ear/15° Tilt	IN	Down	0.13
1908.75	1175	24.06	24.01	Standard	Right Ear/15° Tilt	IN	Down	0.125
1851.25	0025	24.09	24.03	Standard	Left Cheek/Touch	IN	Down	0.127
1880.00	0600	24.10	24.04	Standard	Left Cheek/Touch	IN	Down	0.073
1908.75	1175	24.10	24.03	Standard	Left Cheek/Touch	IN	Down	0.073
1851.25	0025	24.10	24.03	Standard	Left Ear/15° Tilt	IN	Down	0.311
1880.00	0600	24.10	24.06	Standard	Left Ear/15° Tilt	IN	Down	0.176
1908.75	1175	24.06	23.93	Standard	Left Ear/15° Tilt	IN	Down	0.166
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		

NOTE:

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Prior to testing the conducted output power was measured.
4. The EUT is tested 2nd hot-spot peak, if it is less than 2dB below the highest peak and with a peak SAR value greater than 0.5W/kg.
5. Battery is fully charged for all readings.
6. Test Signal Call Mode Continuous Tx On Manu.Test Codes Base Station Simulator
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15.1 cm. \pm 0.1



D.M.JUNG (Manager)

14. SAR DATA SUMMARY(Continue)

Mixture Type : 1900MHZ Brain

14.12 MEASUREMENT RESULTS (PCS Head SAR)								
FREQUENCY		Begin/End POWER [dBm]		Battery Type	Device Test Position	Antenna Position	Slide Position	SAR (W/kg)
MHz	Ch							
1851.25	0025	24.05	23.80	Standard	Right Cheek/Touch	IN	Up	0.028
1880.00	0600	24.09	23.94	Standard	Right Cheek/Touch	IN	Up	0.027
1908.75	1175	24.06	24.01	Standard	Right Cheek/Touch	IN	Up	0.035
1851.25	0025	24.05	23.83	Standard	Right Ear/15° Tilt	IN	Up	0.031
1880.00	0600	24.05	24.01	Standard	Right Ear/15° Tilt	IN	Up	0.025
1908.75	1175	24.09	24.03	Standard	Right Ear/15° Tilt	IN	Up	0.025
1851.25	0025	24.10	24.06	Standard	Left Cheek/Touch	IN	Up	0.034
1880.00	0600	24.10	24.04	Standard	Left Cheek/Touch	IN	Up	0.028
1908.75	1175	24.05	23.95	Standard	Left Cheek/Touch	IN	Up	0.032
1851.25	0025	24.08	23.85	Standard	Left Ear/15° Tilt	IN	Up	0.030
1880.00	0600	24.08	23.99	Standard	Left Ear/15° Tilt	IN	Up	0.029
1908.75	1175	24.07	24.01	Standard	Left Ear/15° Tilt	IN	Up	0.030
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		

NOTE:

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Prior to testing the conducted output power was measured.
4. The EUT is tested 2nd hot-spot peak, if it is less than 2dB below the highest peak and with a peak SAR value greater than 0.5W/kg.
5. Battery is fully charged for all readings.
6. Test Signal Call Mode Continuous Tx On Manu.Test Codes Base Station Simulator
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15.1 cm. \pm 0.1



D.M.JUNG (Manager)

14. SAR DATA SUMMARY(Continue)

Mixture Type : 1900MHZ Brain

14.13 MEASUREMENT RESULTS (PCS Head SAR)								
FREQUENCY		Begin/End POWER [dBm]		Battery Type	Device Test Position	Antenna Position	Slide Position	SAR (W/kg)
MHz	Ch							
1851.25	0025	24.05	23.85	Standard	Right Cheek/Touch	Out	Down	0.339
1880.00	0600	24.05	23.90	Standard	Right Cheek/Touch	Out	Down	0.298
1908.75	1175	24.08	24.05	Standard	Right Cheek/Touch	Out	Down	0.322
1851.25	0025	24.09	23.97	Standard	Right Ear/15° Tilt	Out	Down	0.426
1880.00	0600	24.09	24.05	Standard	Right Ear/15° Tilt	Out	Down	0.413
1908.75	1175	24.06	24.07	Standard	Right Ear/15° Tilt	Out	Down	0.418
1851.25	0025	24.06	23.91	Standard	Left Cheek/Touch	Out	Down	0.443
1880.00	0600	24.06	23.88	Standard	Left Cheek/Touch	Out	Down	0.394
1908.75	1175	24.09	24.03	Standard	Left Cheek/Touch	Out	Down	0.389
1851.25	0025	24.10	24.06	Standard	Left Ear/15° Tilt	Out	Down	0.519
1880.00	0600	24.10	23.99	Standard	Left Ear/15° Tilt	Out	Down	0.523
1908.75	1175	24.10	24.03	Standard	Left Ear/15° Tilt	Out	Down	0.418
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		

NOTE:

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Prior to testing the conducted output power was measured.
4. The EUT is tested 2nd hot-spot peak, if it is less than 2dB below the highest peak and with a peak SAR value greater than 0.5W/kg.
5. Battery is fully charged for all readings.
6. Test Signal Call Mode Continuous Tx On Manu.Test Codes Base Station Simulator
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15.1 cm. \pm 0.1



D.M.JUNG (Manager)

14. SAR DATA SUMMARY(Continue)

Mixture Type : 1900MHZ Brain

14.14 MEASUREMENT RESULTS (PCS Head SAR)								
FREQUENCY		Begin/End POWER [dBm]		Battery Type	Device Test Position	Antenna Position	Slide Position	SAR (W/kg)
MHz	Ch							
1851.25	0025	24.09	23.98	Standard	Right Cheek/Touch	Out	Up	0.197
1880.00	0600	24.10	24.05	Standard	Right Cheek/Touch	Out	Up	0.122
1908.75	1175	24.10	24.05	Standard	Right Cheek/Touch	Out	Up	0.126
1851.25	0025	24.09	23.97	Standard	Right Ear/15° Tilt	Out	Up	0.268
1880.00	0600	24.08	24.00	Standard	Right Ear/15° Tilt	Out	Up	0.153
1908.75	1175	24.09	23.98	Standard	Right Ear/15° Tilt	Out	Up	0.158
1851.25	0025	24.10	24.03	Standard	Left Cheek/Touch	Out	Up	0.221
1880.00	0600	24.09	24.00	Standard	Left Cheek/Touch	Out	Up	0.136
1908.75	1175	24.09	24.05	Standard	Left Cheek/Touch	Out	Up	0.130
1851.25	0025	24.09	23.95	Standard	Left Ear/15° Tilt	Out	Up	0.288
1880.00	0600	24.08	23.92	Standard	Left Ear/15° Tilt	Out	Up	0.175
1908.75	1175	24.09	23.98	Standard	Left Ear/15° Tilt	Out	Up	0.169
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		

NOTE:

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Prior to testing the conducted output power was measured.
4. The EUT is tested 2nd hot-spot peak, if it is less than 2dB below the highest peak and with a peak SAR value greater than 0.5W/kg.
5. Battery is fully charged for all readings.
6. Test Signal Call Mode Continuous Tx On Manu.Test Codes Base Station Simulator
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15.1 cm. \pm 0.1



D.M.JUNG (Manager)

14. SAR DATA SUMMARY(Continue)

Mixture Type: 1900MHZ Muscle

14.15 MEASUREMENT RESULTS (PCS Body SAR)								
FREQUENCY		Begin/End POWER [dBm]		Battery Type	Device Test Position	Antenna Position	Slide Position	SAR (W/kg)
MHz	Ch							
1851.25	0025	24.07	23.95	Standard	1.5cm[w/o Holster]	IN	Down	0.236
1880.00	0600	24.09	23.95	Standard	1.5cm[w/o Holster]	IN	Down	0.235
1908.75	1175	24.07	23.91	Standard	1.5cm[w/o Holster]	IN	Down	0.238
1851.25	0025	24.05	23.90	Standard	1.5cm[w/o Holster]	IN	Up	0.179
1880.00	0600	24.04	23.89	Standard	1.5cm[w/o Holster]	IN	Up	0.185
1908.75	1175	24.08	23.96	Standard	1.5cm[w/o Holster]	IN	Up	0.191
1851.25	0025	24.10	23.91	Standard	1.5cm[w/o Holster]	Out	Down	0.468
1880.00	0600	24.09	23.90	Standard	1.5cm[w/o Holster]	Out	Down	0.300
1908.75	1175	24.09	23.95	Standard	1.5cm[w/o Holster]	Out	Down	0.263
1851.25	0025	24.04	24.03	Standard	1.5cm[w/o Holster]	Out	Up	0.279
1880.00	0600	24.09	23.90	Standard	1.5cm[w/o Holster]	Out	Up	0.207
1908.75	1175	24.04	23.98	Standard	1.5cm[w/o Holster]	Out	Up	0.226
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		

NOTE:

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Prior to testing the conducted output power was measured.
4. The EUT is tested 2nd hot-spot peak, if it is less than 2dB below the highest peak and with a peak SAR value greater than 0.5W/kg.
5. Battery is fully charged for all readings.
6. Test Signal Call Mode Continuous Tx On Manu.Test Codes Base Station Simulator
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15.1 cm. \pm 0.1



D.M.JUNG (Manager)

15. SAR TEST Calibration

Table 15.1 Test Equipment Calibration

EQUIPMENT SPECIFICATIONS			
Type	Serial Number	Calibration Date	Valid Period
8753D Network Analyzer	3410J01204	March 2004	One year
HP85070D Dielectric Probe Kit	US01440118	-	-
SPEAG Validation Dipole D835MHz	464	February 2004	Two year
HP EPM-442A Power Meter	GB37170267	March 2004	One year
8481A Power Sensor	3318A96566	March 2004	One year
8481A Power Sensor	3318A90918	March 2004	One year
HP E4421A Signal Generator	US37230529	April 2004	One year
Amplifier	1020 D/C 0221	July 2004	One year
Data Acquisition Electronics	520	July 2004	One year
Dosimetric E-Field Probe	1702	February 2004	One year
Dummy Probe	N/A	-	-
Wireless Communication Test Set (8960 Series)	November 2003	GB41321167	One year

NOTE:

The E-field probe was calibrated by SPEAG, by temperature measurement procedure. Dipole Validation measurement is performed by Digital EMC, before each test. The brain simulating material is calibrated by Digital EMC using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain-equivalent material.

16. CONCLUSION

Measurement Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of ICNIRP Guidelines. These measurements are taken to simulate the RF effects exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

17. REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1 - 1991, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300kHz to 100GHz, New York: IEEE, Aug. 1992.
- [3] ANSI/IEEE C95.3 - 1991, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, 1992.
- [4] Federal Communications Commission, OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields, July 2001.
- [5] IEEE Standards Coordinating Committee 34 — IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 120-124.
- [9] K. Polovć, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids. Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Head Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Receipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] Federal Communications Commission, OET Bulletin 65, Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields. Supplement C, Dec. 1997.
- [18] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [19] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [20] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.

--- END OF REPORT BODY ---