



683-3, Yubang-Dong, Yongin-Si, Kyunggi-Do, Korea. 449-080

Tel: +82-31-321-2664 Fax: +82-31-321-1664

<http://www.digitalemc.com>

CERTIFICATE OF COMPLIANCE

FCC Part 22 & 24 Certification

Dates of Tests: June 25 ~ July 19, 2004

Test Report S/N:DR50110407D

Test Site : DIGITAL EMC CO., LTD.

Model No.

SBWVK530US

APPLICANT

VK Corporation

Classification:	Licensed Portable Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§24(E), §22(H), §15, §2
EUT Type:	GSM850/PCS1900 Dual Band,GPRS Terminal Equipment
Model name:	VK530US
Serial number:	Identical prototype
TX Frequency Range:	824.2 ~ 848.8 MHz (GSM850) / 1850.2 ~ 1909.8 MHz (PCS1900)
RX Frequency Range:	869.2 ~ 893.8 MHz (GSM850) / 1930.2 ~ 1989.8 MHz (PCS1900)
Max. RF Output Power:	2.535 W ERP GSM850 (34.04dBm) 1.560 W EIRP PCS1900 (31.93dBm)
Max. SAR Measurement:	0.934W/kg GSM850 Head SAR / 0.813W/kg GSM850 Body SAR 1.480W/kg PCS1900 Head SAR / 0.625W/kg PCS1900 Body SAR
Date of Issue:	July 20, 2004

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



NVLAP LAB CODE 200559-0

TABLE OF CONTENTS

ATTACHMENT A: COVER LETTER(S)	
ATTACHMENT B: ATTESTATION STATEMENT(S)	
ATTACHMENT C: TEST REPORT	
1 SCOPE	3
2 INTRODUCTION	4
3 TEST REPORT	5
3.1 SUMMARY OF TEST	5
3.2 POWER OUTPUT	6
3.3 OCUPIED BANDWIDTH	12
3.4 OCCUPIED BANDWIDTH EMISSION LIMIT	16
3.5 SPURIOUS EMISSION AT ANT. TERMINAL	28
3.6 FIELD STRENGTH OF SPURIOUS RADIATION	41
3.7 FREQUENCY STABILITY	48
3.8 RECEIVER RADIATED EMISSIONS	51
3.9 CONDUCTED EMISSIONS	52
4 TEST EQUIPMENT	59
5 EMISSION DESIGNATOR	61
6 CONCLUSION	62
ATTACHMENT D: TEST PLOTS	
ATTACHMENT E: FCC ID LABEL & LOCATION	
ATTACHMENT F: TEST SETUP PHOTOGRAPHS	
ATTACHMENT G: EXTERNAL PHOTOGRAPHS	
ATTACHMENT H: INTERNAL PHOTOGRAPHS	
ATTACHMENT I: BLOCK DIAGRAM(S)	
ATTACHMENT J: SCHEMATIC DIAGRAM(S)	
ATTACHMENT K: OPERATIONAL / CIRCUIT DESCRIPTION	
ATTACHMENT L: PARTS LIST/TUNE UP PROCEDURE	
ATTACHMENT M: USER'S MANUAL	
ATTACHMENT O: SAR MEASUREMENTS REPORT	
ATTACHMENT P: SAR TEST PLOTS	
ATTACHMENT Q: SAR TEST SETUP PHOTOGRAPHS	
ATTACHMENT R: DIPOLE VALIDATION (S)	
ATTACHMENT S: PROBE CALIBRATION	

MEASUREMENT REPORT

1. Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

§2.1033 General Information

Applicant: VK Corporation

Address: 2F Seo-Woo B/D, 97-3, I-Mea-Dong, Bundang-Gu, Seongnam City, Kyonggi-Do, KOREA

Attention: Seung-Bok Won (Manager)

- FCC ID: SBWVK530US
- Quantity: The mass product
- Tx Freq. Range: 824.2 ~ 848.8 MHz (GSM850) / 1850.2 ~ 1909.8 MHz (PCS1900)
- Rx Freq. Range: 869.2 ~ 893.8 MHz (GSM850) / 1930.2 ~ 1989.8 MHz (PCS1900)
- Max. Power Rating: 2.535W ERP GSM850
1.560W EIRP PCS1900
- FCC Classification(s): Licensed Portable Transmitter Held to Ear (PCE)
- Equipment (EUT) Type: GSM850/PCS1900 Dual Band,GPRS Terminal Equipment
- Modulation(s): GMSK
- Frequency Tolerance: ± 0.00025 % (2.5ppm)
- FCC Rule Part(s): §24(E), §22(H), §15, §2
- Dates of Tests: June 25 ~ July 08, 2004
- Place of Tests: DIGITAL EMC
- Test Report S/N: DR50110407D

2. General information's

This report contains the result of tests performed by:

DIGITAL EMC CO., LTD.

Address : 683-3, Yubang-Dong, Yongin-Si, Kyunggi-Do, Korea. 449-080

<http://www.digitalemc.com> E-mail : demc@unitel.co.kr

Tel: +82-31-321-2664 Fax: +82-31-321-1664

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the "General requirements for the competents of calibration and testing laboratory".

This laboratory is accredited by NVLAP for NVLAP Lab. Code : 200559-0.

Test operator: engineer

July 08, 2004

Kyung-Taek LEE



Data

Name

Signature

Report Reviewed By: manager

July 08, 2004

Dong -Min JUNG



Data

Name

Signature

Ordering party:

Company name : VK Corporation
 Address : R&D Center 2F Seo-Woo B/D, 97-3, I-Mea-Dong, Bundang-Gu
 Zipcode : 463-060
 City/town : Seongnam City, Kyonggi-Do
 Country : KOREA
 Date of order : June 25, 2004

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	Parameter	Status (note 1)
22.913(a) / 24.232(b)	Power Output	C
2.1049(h)(i)	Occupied Bandwidth	C
24.238(b)	Emission Bandwidth	C
2.1051 / 24.238	Emission Limits Transmitter	C
2.1053 (a)	Field Strength of Spurious Radiation	C
2.1053	Receiver Radiated Emissions	C
2.1055	Frequency Stability	C
2.1057	Conducted Spurious Emissions	C
15.107 / 15.207	Conducted Emissions	C
Note 1: C= Complies NC=Not Complies NT=Not Tested NA=Not Applicable		

The sample was tested according to the following specification:

FCC Parts §24(E), §22(H), §15, §2; ANSI C-63.4-2001

3.2 Requirements

3.2.1 Output Power

FCC ID	: SBWVK530US
Specification	: 47 CFR 2.1046 (a)
Tested Frequency	: 824.2MHz, 836.6MHz and 848.8MHz for GSM850 1850.2MHz, 1880.0MHz and 1909.8MHz for PCS1900

Measurement Procedure:

- During the process of testing, the EUT was controlled via Radio Communication tester to ensure max. Power transmission and proper modulation.
- Power output was measured at the RF output terminals when the transmitter is adjusted in accordance with Communication tester (or the tune-up procedure).

Measurement Data:


GSM850

Channel	Frequency (MHz)	TEST CONDITIONS Power Step: 5
		(dBm)
128	824.2	32.71
190	836.6	32.59
251	848.8	32.66


PCS1900

Channel	Frequency (MHz)	TEST CONDITIONS Power Step: 0
		(dBm)
512	1850.2	30.28
661	1880.0	30.67
810	1909.8	30.67


POWER OUT. GSM850 Ch.128

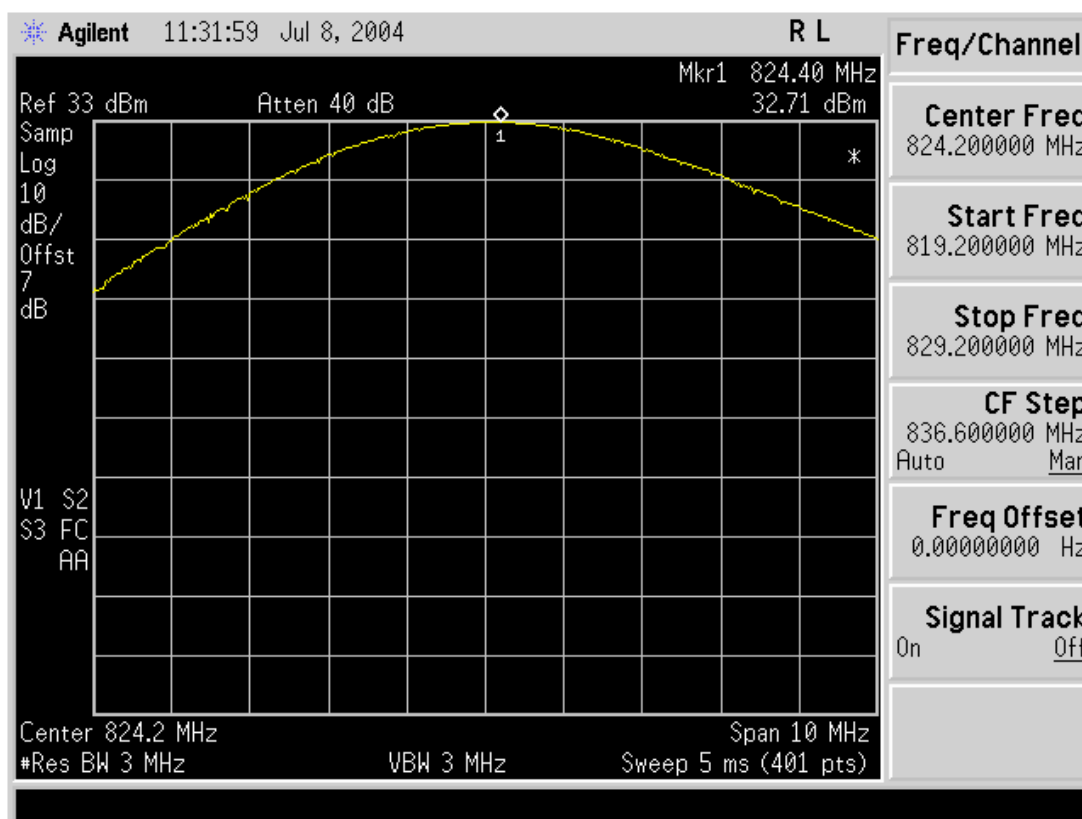


POWER OUT. GSM850 Ch.190

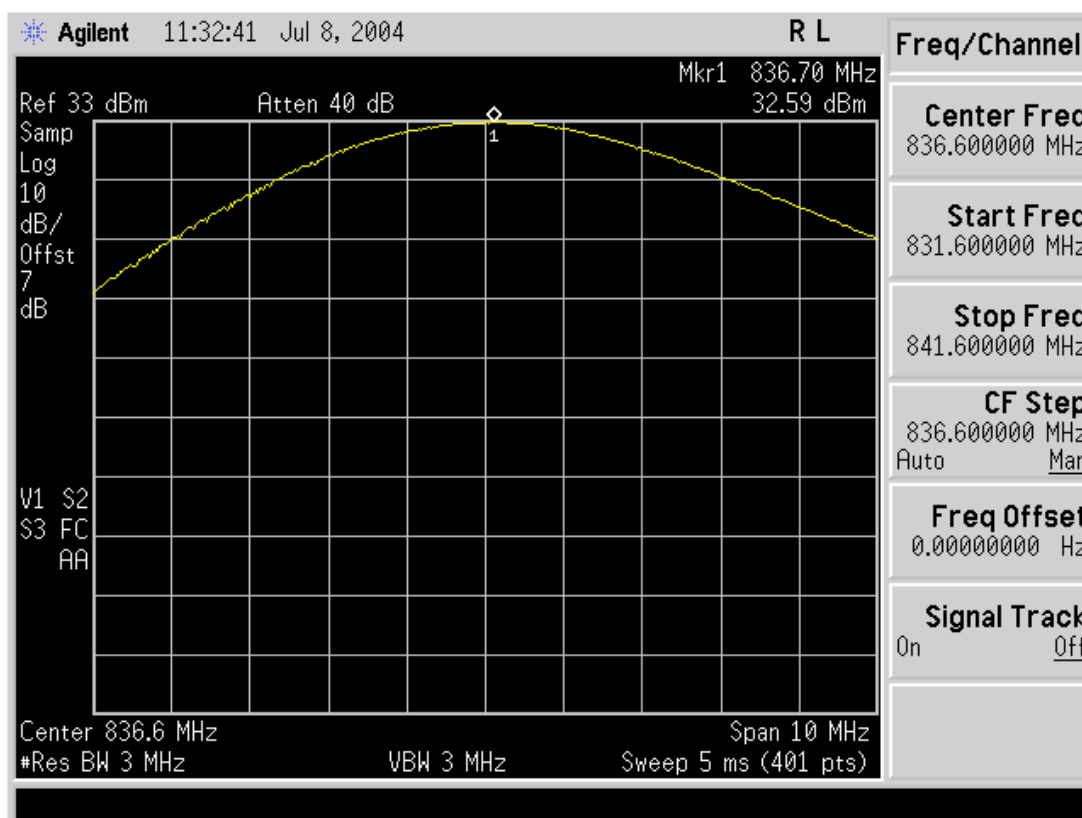


POWER OUT. GSM850 Ch.251

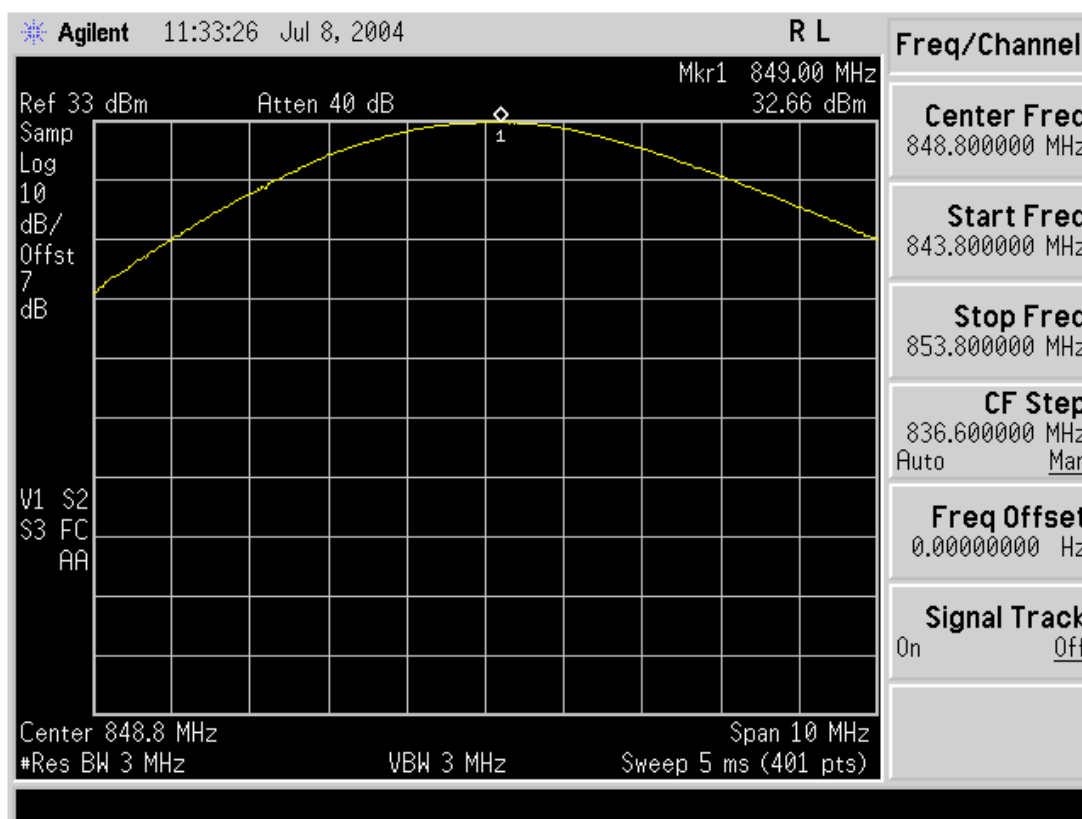


POWER OUT. PCS1900 Ch.512

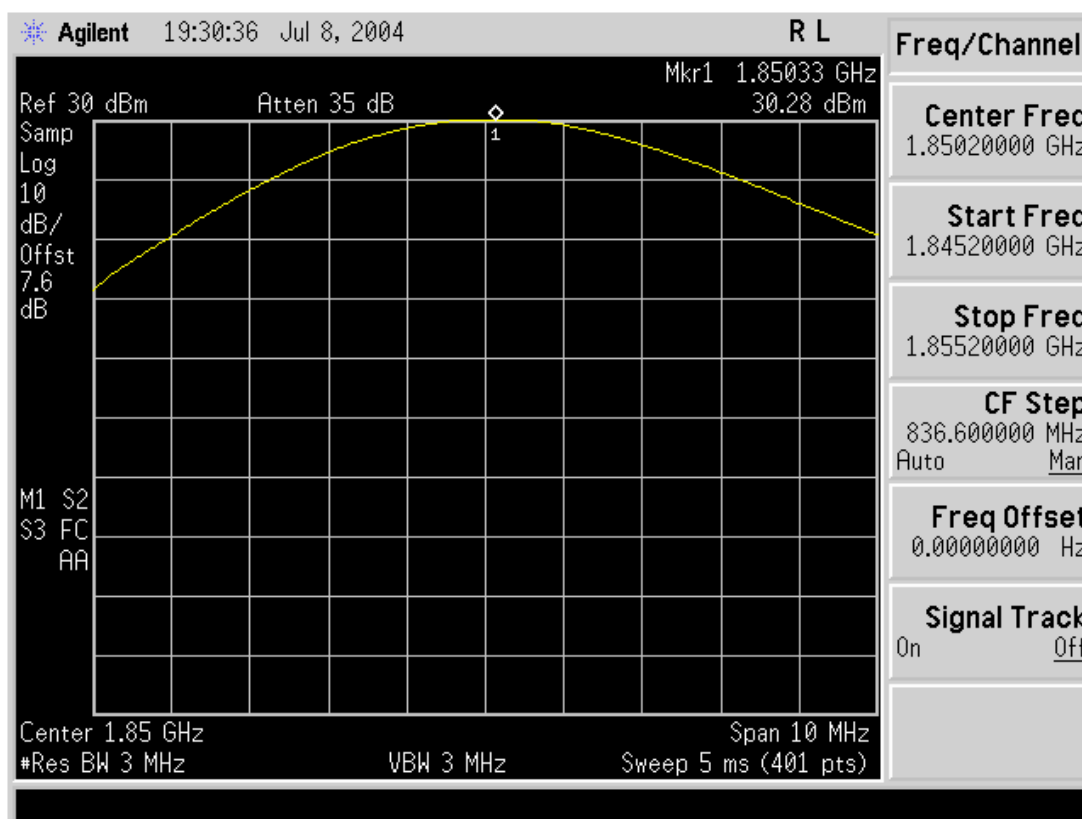

POWER OUT. PCS1900 Ch.661

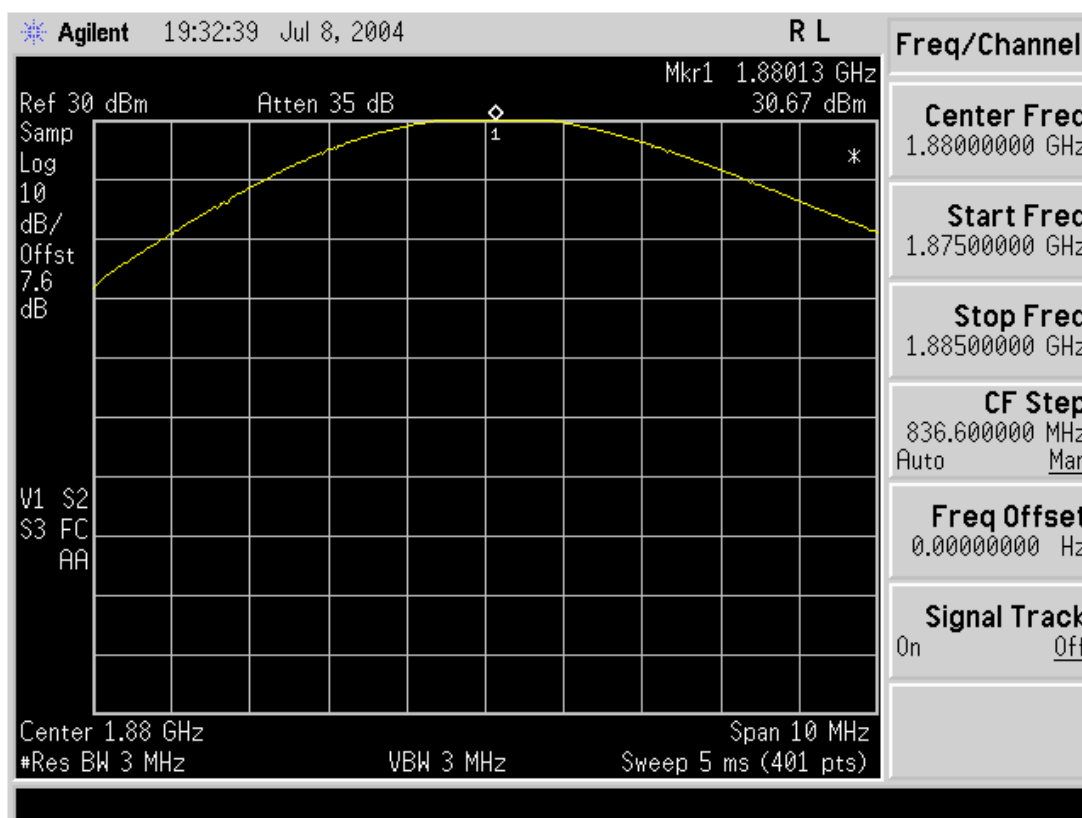

POWER OUT. PCS1900 Ch.810

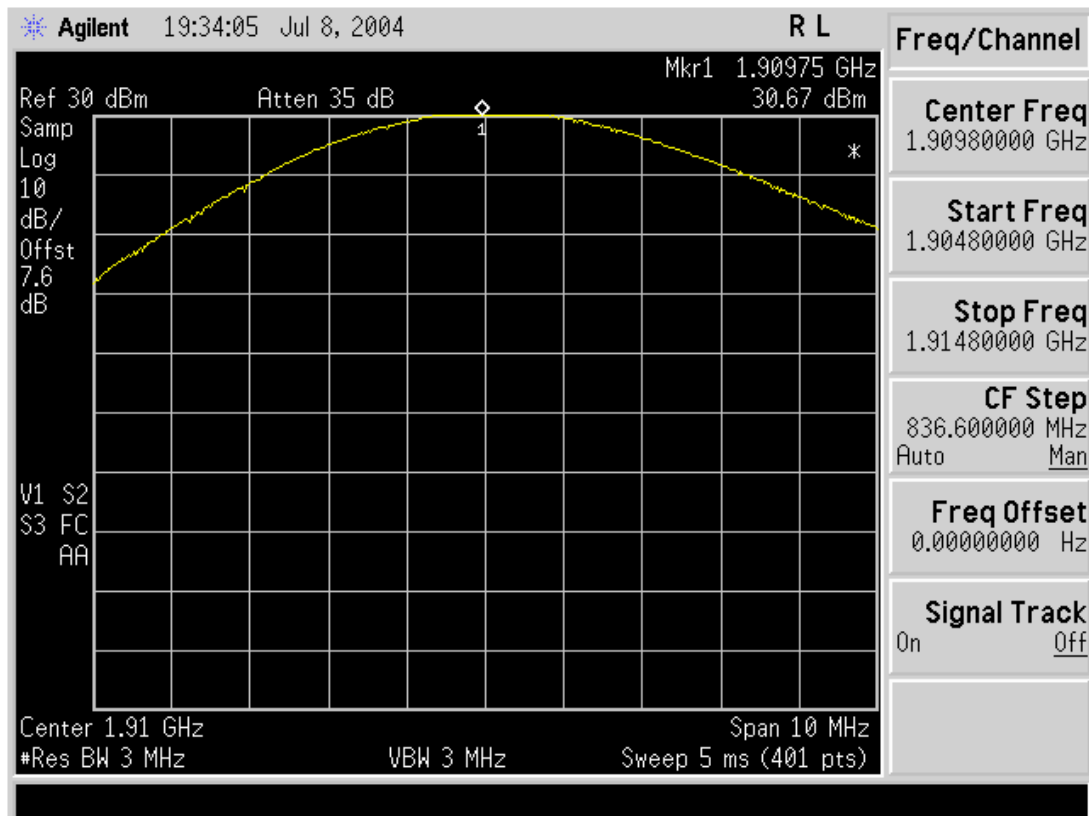

ERP (GSM850)

FCC ID : SBWVK530US
 Specification : 47 CFR 22.913(a)
 Tested Frequency : 824.2MHz, 836.6MHz and 848.8MHz for GSM850
 RBW=VBW : 3MHz

Measurement Procedure:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

Measurement Data:

GSM850

Channel	Frequency (MHz)	TEST CONDITIONS Power Step: 5				
		Ref. level (dBm)	Pol. (H/V)	ERP (dBm)	ERP (W)	Battery
128	824.2	-5.84	H	33.09	2.037	Standard
190	836.6	-5.64	H	33.11	2.046	Standard
251	848.8	-4.60	H	34.04	2.535	Standard
251	848.8	-4.72	H	33.95	2.483	Slim

Note: Battery is options for this phone.

EIRP (PCS1900)

FCC ID : SBWVK530US
 Specification : 47 CFR 24.232(b)
 Tested Frequency : 1850.2MHz, 1880.0MHz and 1909.8MHz for PCS1900
 RBW=VBW : 3MHz

Measurement Procedure:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

Measurement Data:

PCS1900

Channel	Frequency (MHz)	TEST CONDITIONS Power Step: 0				
		Ref. level (dBm)	Pol. (H/V)	EIRP (dBm)	EIRP (W)	Battery
512	1850.2	-12.38	V	31.93	1.560	Standard
661	1880.0	-12.72	V	31.72	1.486	Standard
810	1909.8	-12.78	V	31.53	1.422	Standard
512	1850.2	-12.53	V	31.84	1.528	Slim

Note: Battery is options for this phone.

3.2.2 Occupied Bandwidth

FCC ID	: SBWVK530US
Specification	: 47 CFR 2.1049 (h)(i)
Tested Frequency	: 824.2MHz, 836.6MHz and 848.8MHz for GSM850 1850.2MHz, 1880.0MHz and 1909.8MHz for PCS1900

Measurement Procedure:

- The 99% power bandwidth was measured with a calibrated spectrum analyzer.
- Spectrum analyzer plots are included on the following pages.

Measurement Data:

GSM850


Channel	Frequency (MHz)	99% Bandwidth
		(kHz)
128	824.2	251.7
190	836.6	243.3
251	848.8	248.3

PCS1900

Channel	Frequency (MHz)	99% Bandwidth
		(kHz)
512	1850.2	248.3
661	1880.0	253.3
810	1909.8	250.0


GSM850

99 % Bandwidth Ch. 128

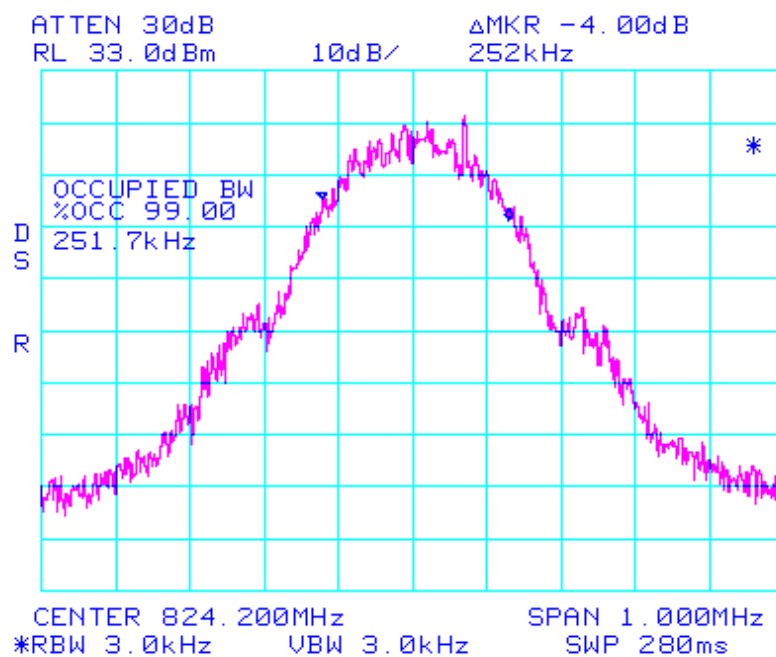


GSM850

99 % Bandwidth Ch. 190

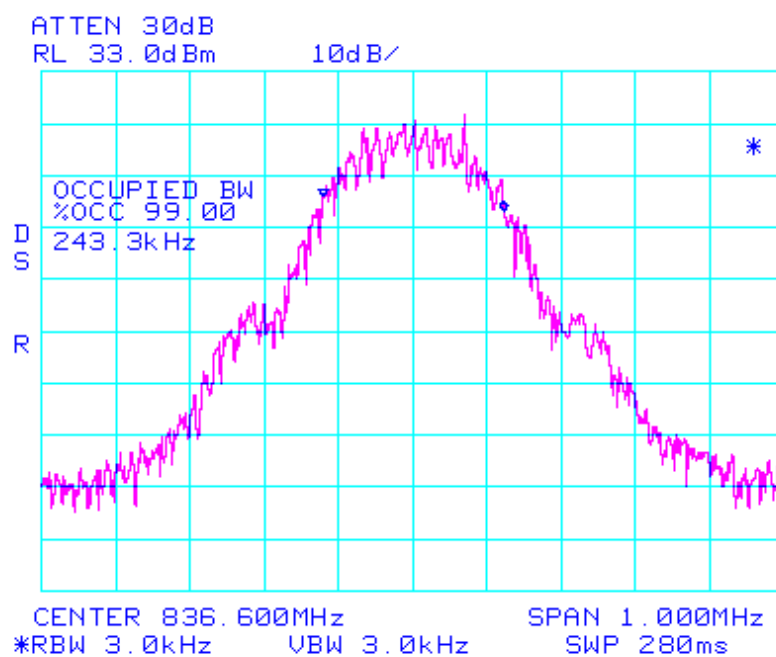


GSM850

99 % Bandwidth Ch. 251

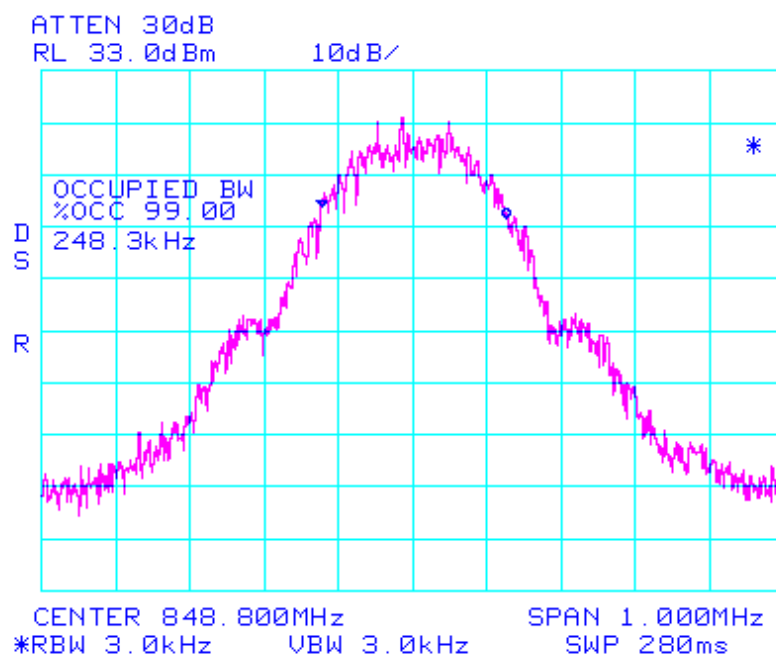


PCS1900

99 % Bandwidth Ch. 512

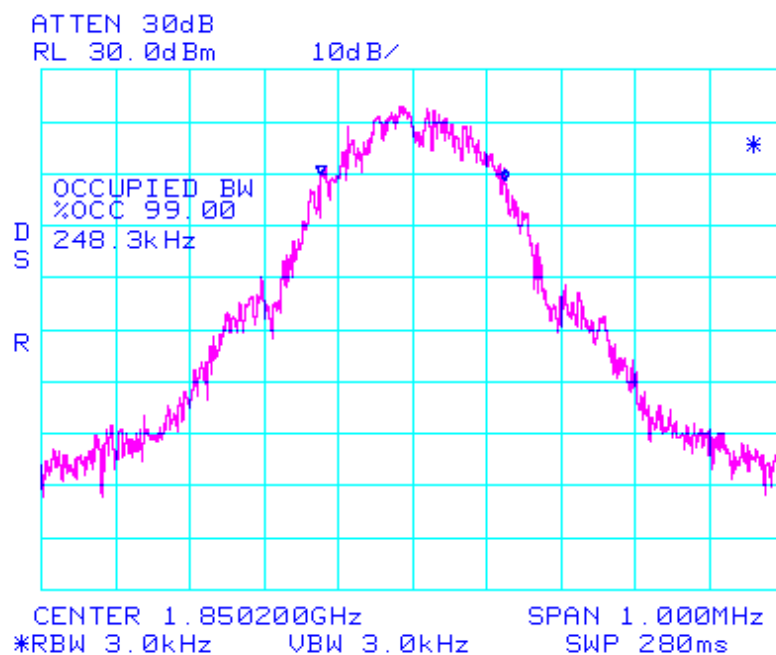


PCS1900

99 % Bandwidth Ch. 661

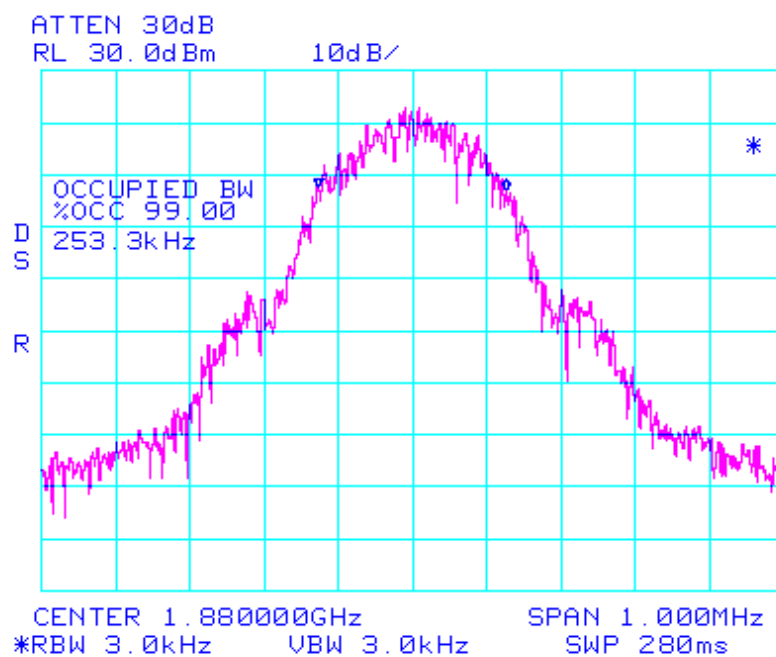

PCS1900

99 % Bandwidth Ch. 810

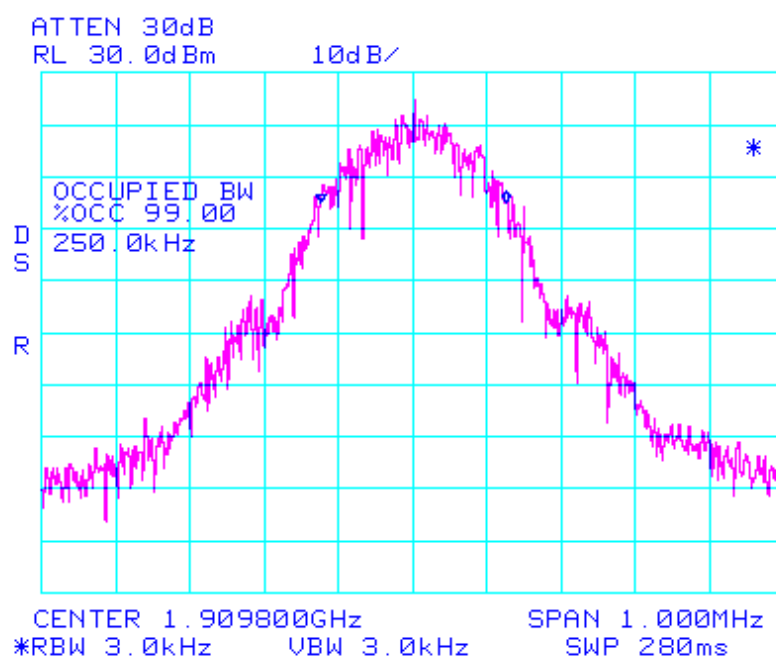

3.2.3 Occupied Bandwidth Emission Limits

FCC ID	: SBWVK530US
Specification	: 47 CFR 24.238(b)
Tested Frequency	: 824.2MHz, 836.6MHz and 848.8MHz for GSM850 1850.2MHz, 1880.0MHz and 1909.8MHz for PCS1900

Measurement Procedure:

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43+10\log(P)$ dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.
- Spectrum analyzer plots are included on the following pages.

Measurement Data:

GSM850


Channel	Frequency (MHz)	-26dBc Bandwidth
		(kHz)
128	824.2	315
190	836.6	312
251	848.8	320

PCS1900

Channel	Frequency (MHz)	-26dBc Bandwidth
		(kHz)
512	1850.2	297
661	1880.0	283
810	1909.8	280


GSM850

-26dBc Bandwidth Ch. 128

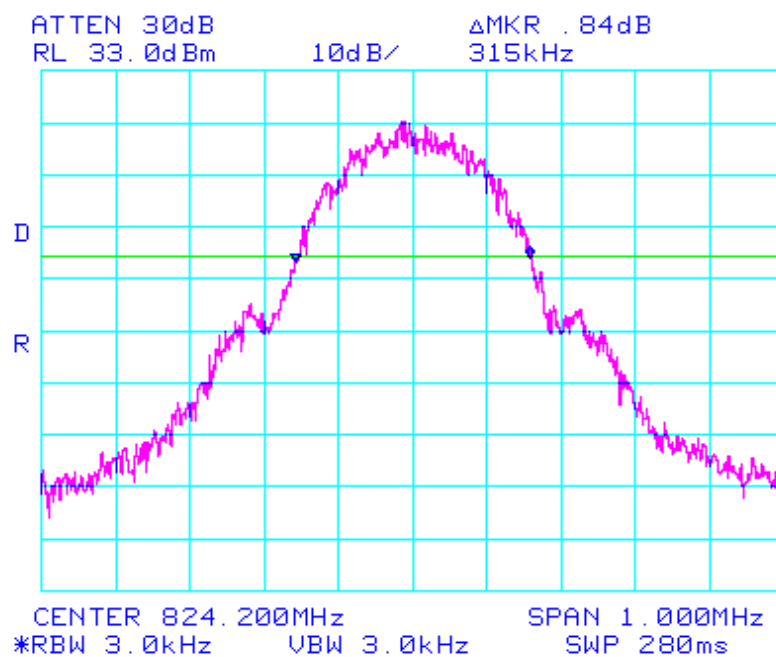


GSM850

-26dBc Bandwidth Ch. 190

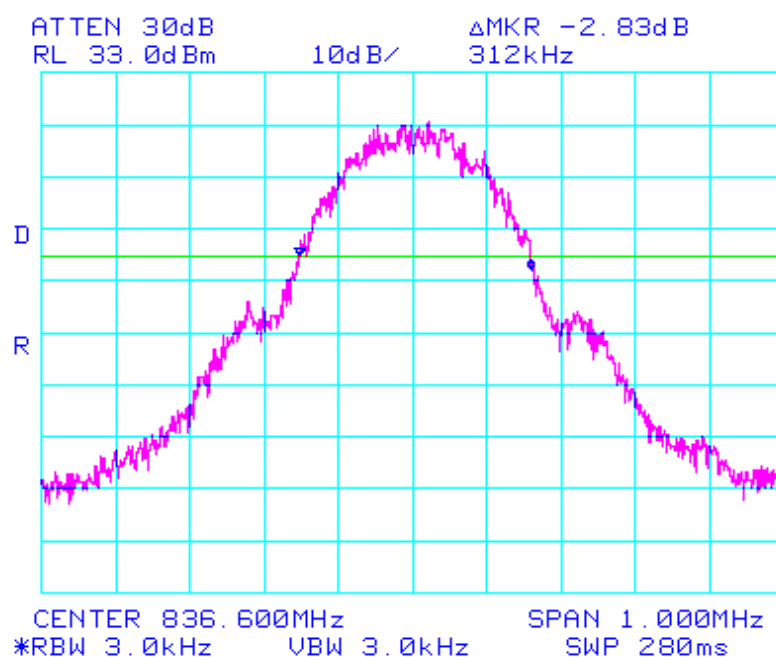


GSM850

-26dBc Bandwidth Ch. 251

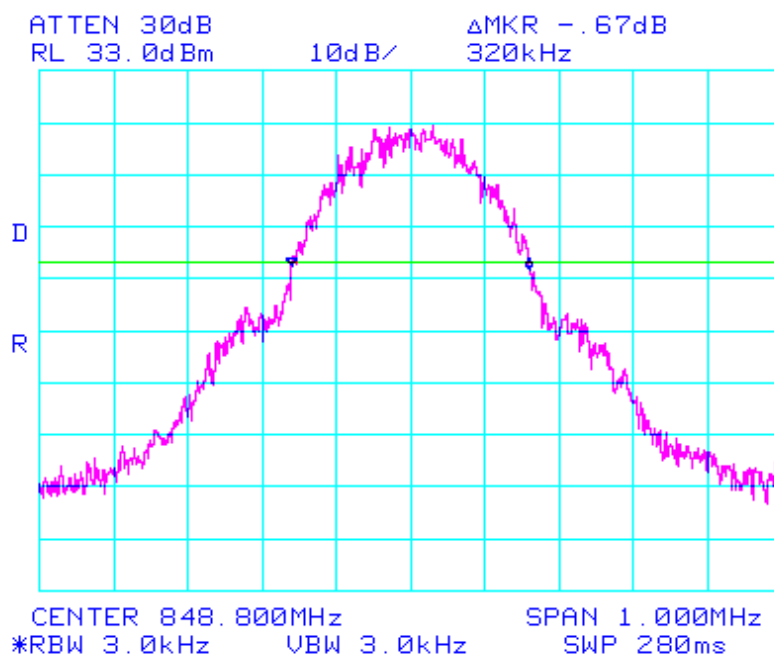


PCS1900

-26dBc Bandwidth Ch. 512

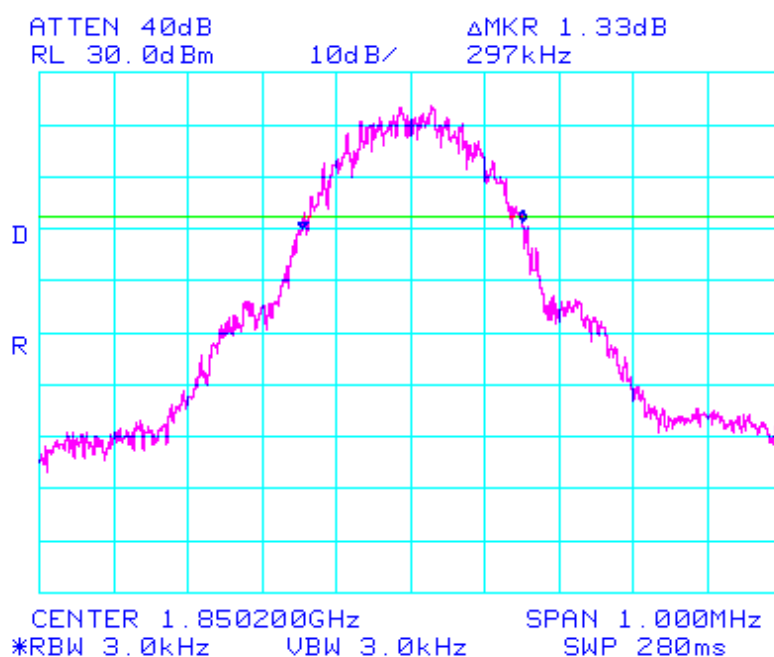


PCS1900

-26dBc Bandwidth Ch. 661

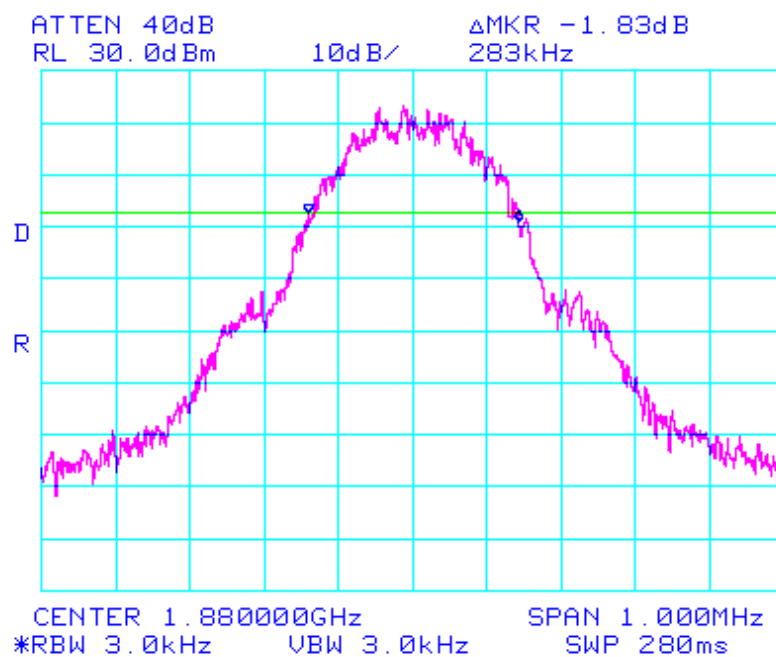


PCS1900

-26dBc Bandwidth Ch. 810

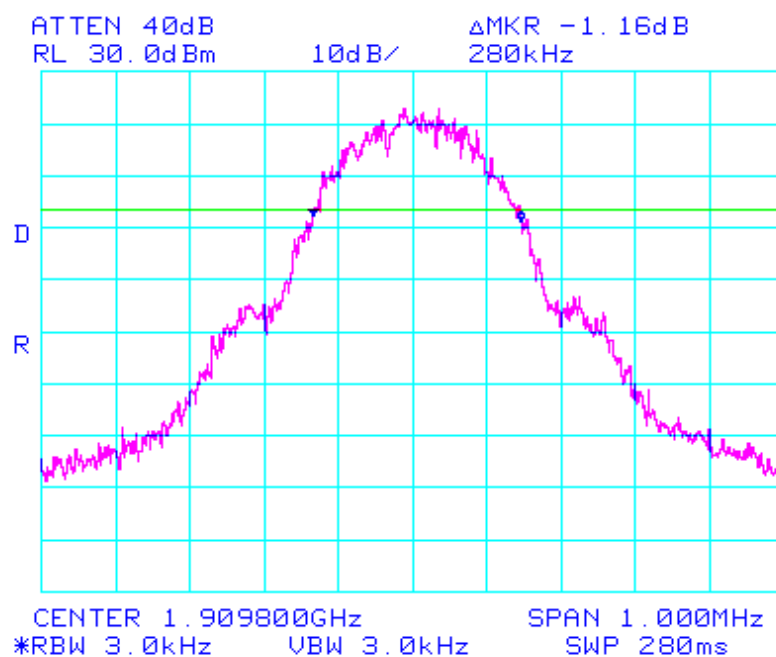


GSM850

Band Edge Ch. 128

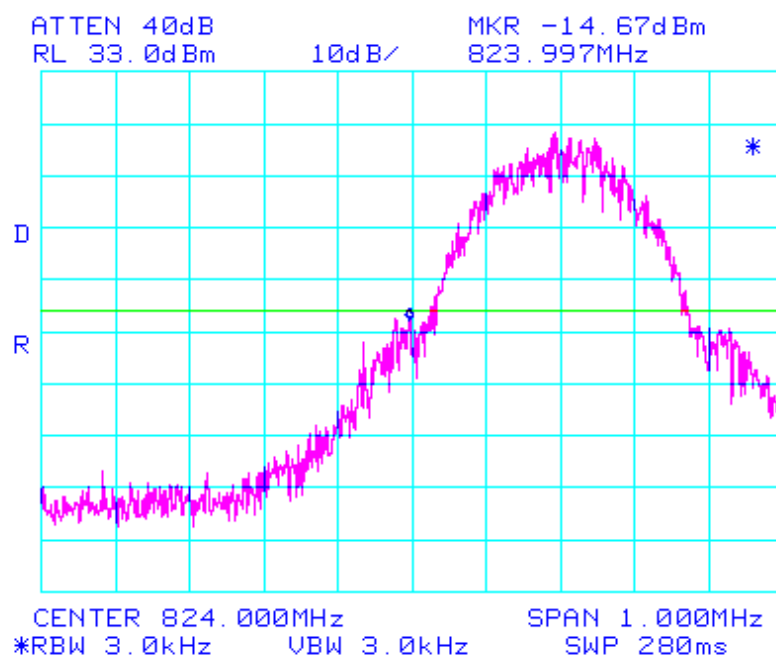


GSM850

Band Edge Ch. 190

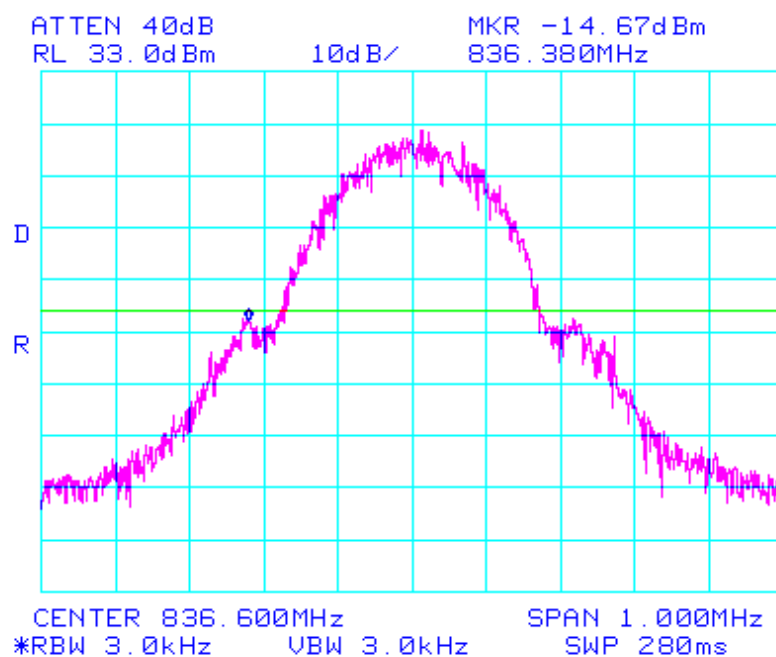


GSM850

Band Edge Ch. 251

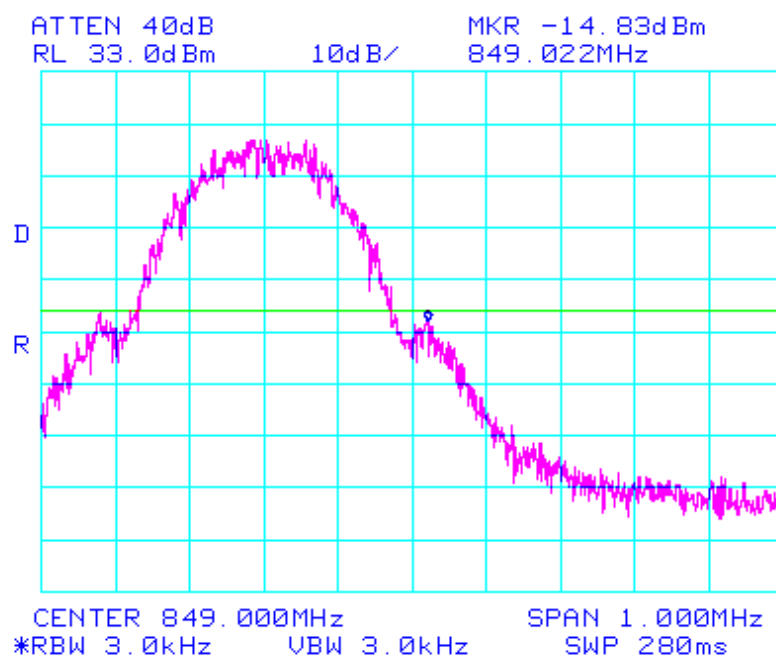


PCS1900

Band Edge Ch. 512

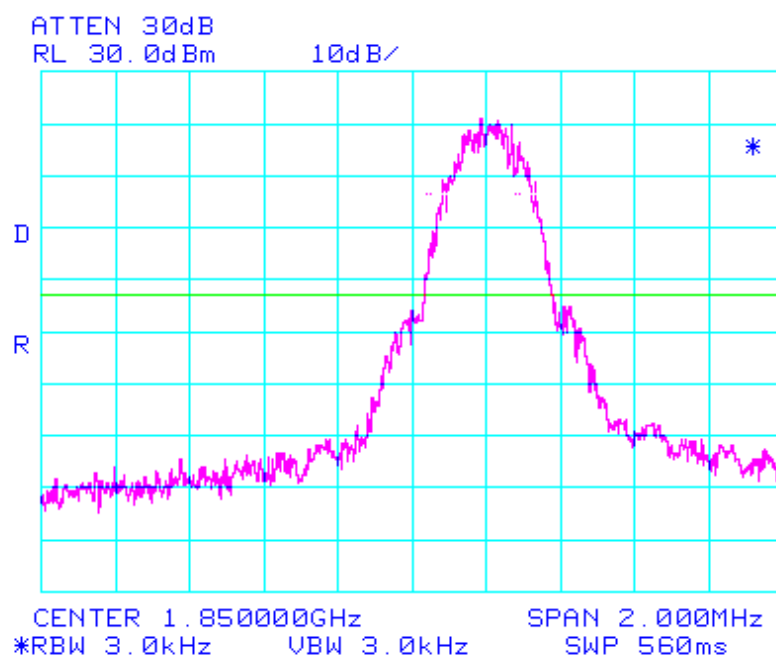


PCS1900

Band Edge Ch. 810

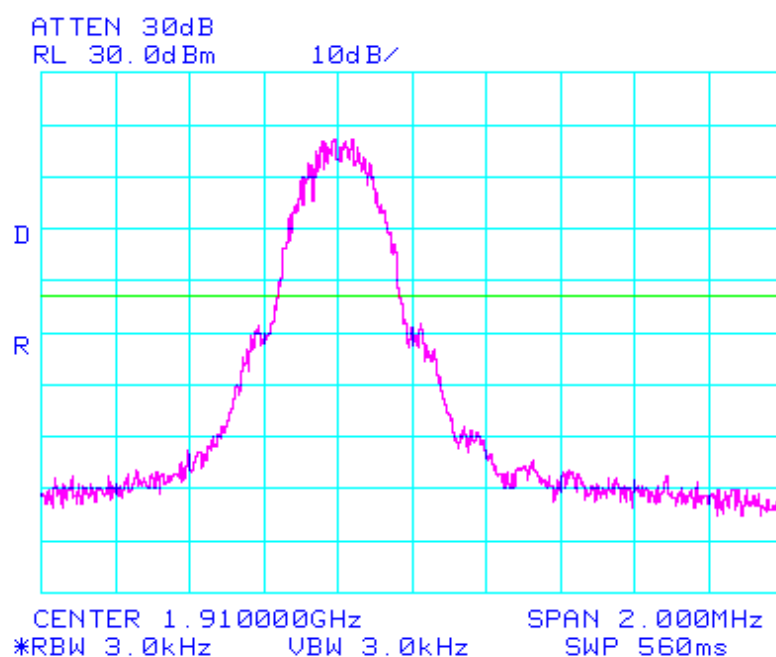


PCS1900

Band Edge Ch. 585

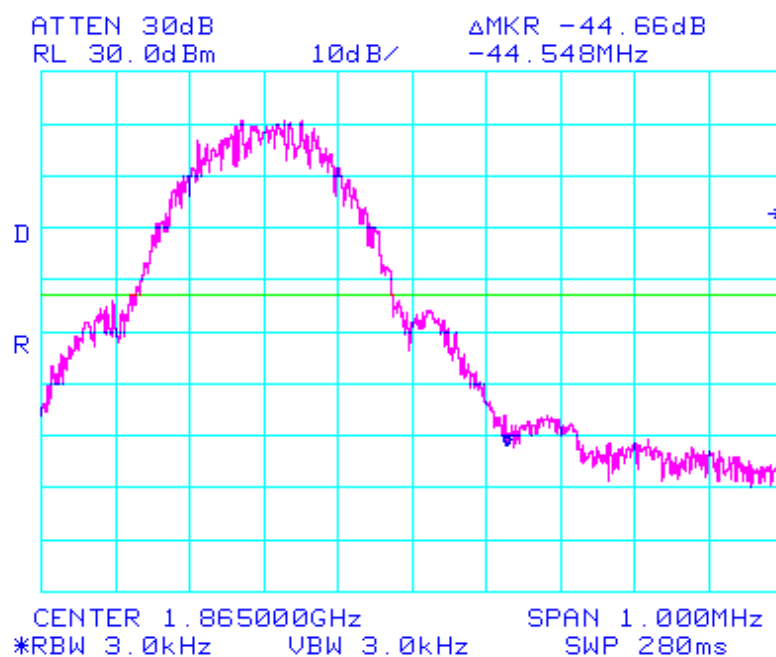


PCS1900

Band Edge Ch. 587

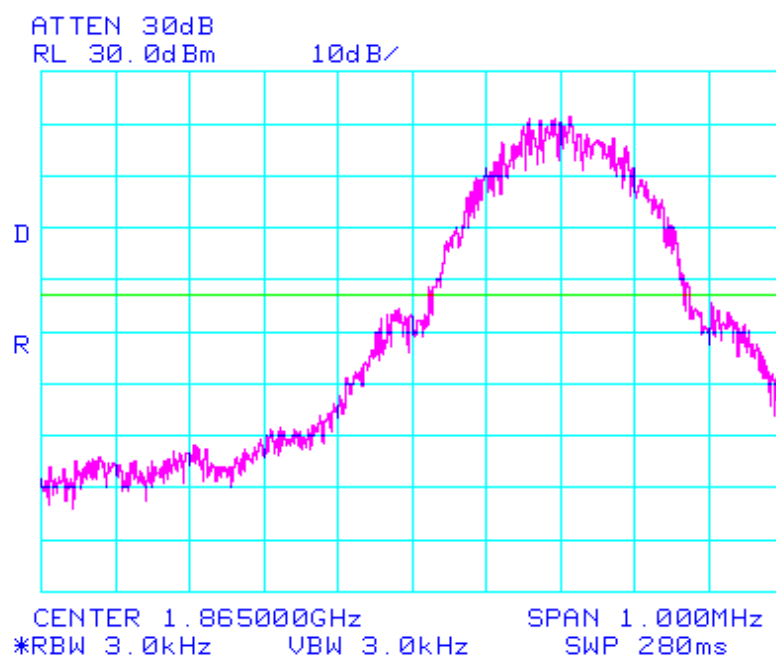


PCS1900

Band Edge Ch. 610

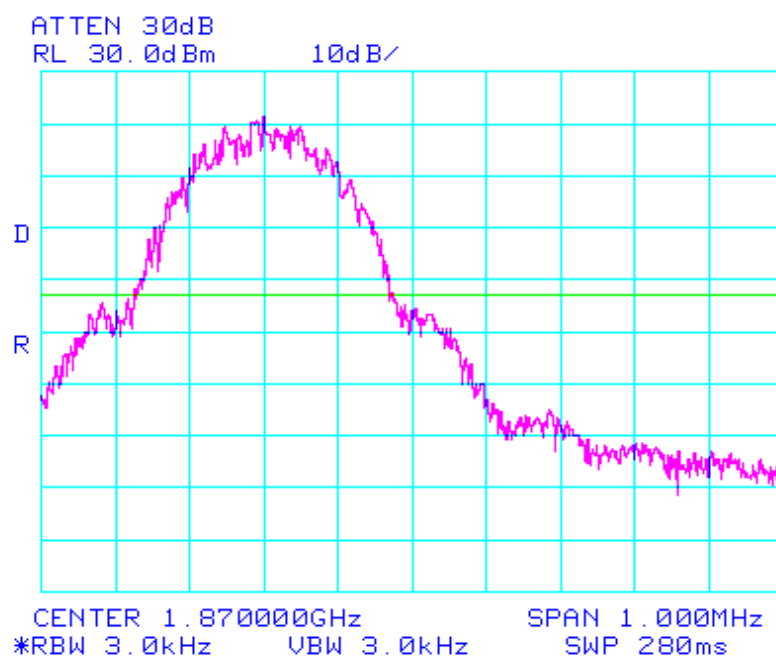


PCS1900

Band Edge Ch. 612

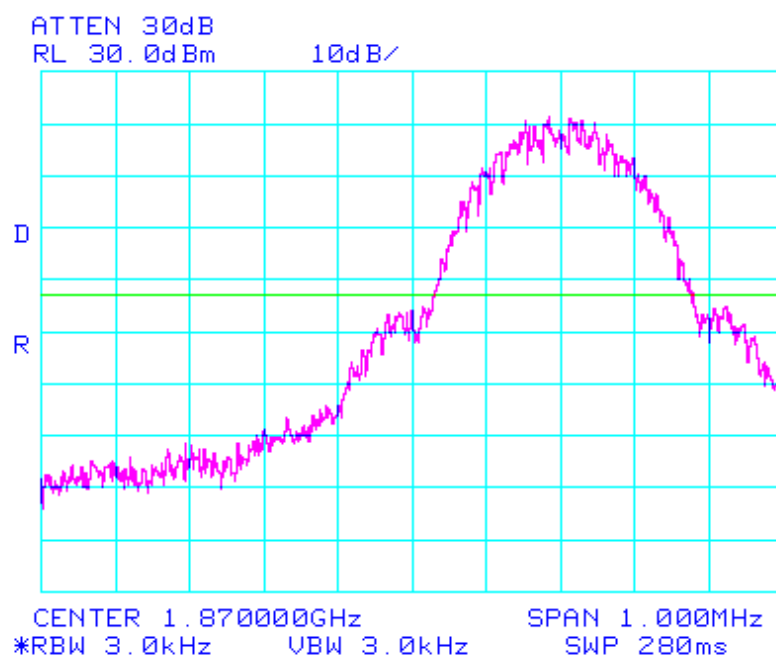


PCS1900

Band Edge Ch. 685

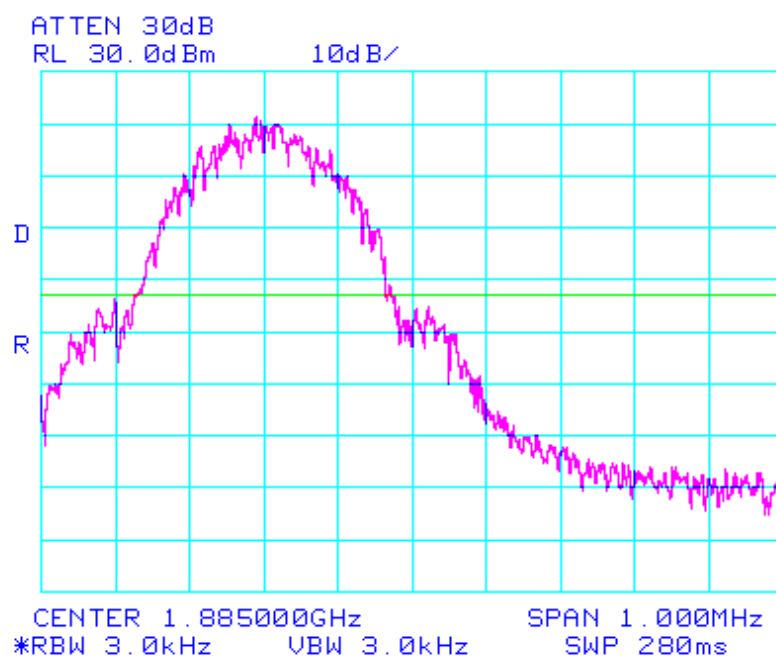


PCS1900

Band Edge Ch. 687

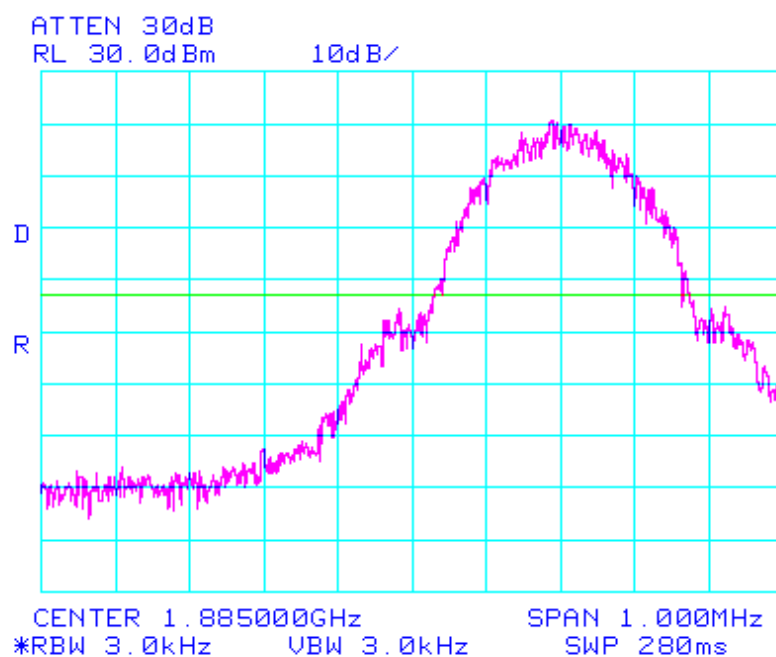


PCS1900

Band Edge Ch. 710

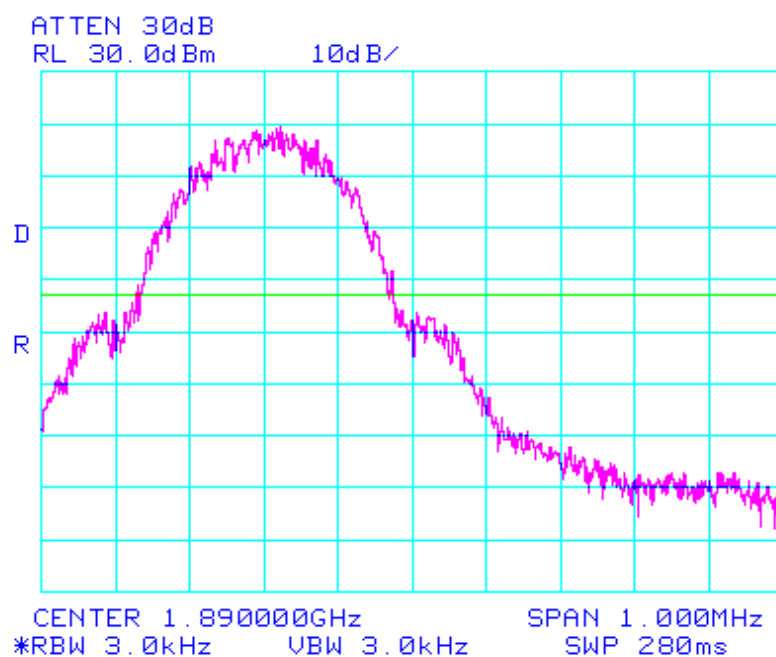


PCS1900

Band Edge Ch. 712

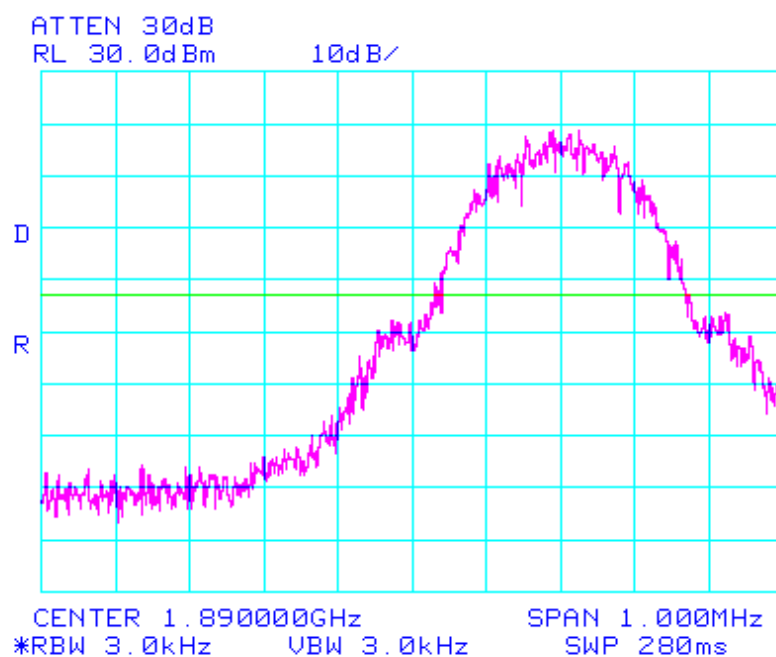


PCS1900

Band Edge Ch. 735

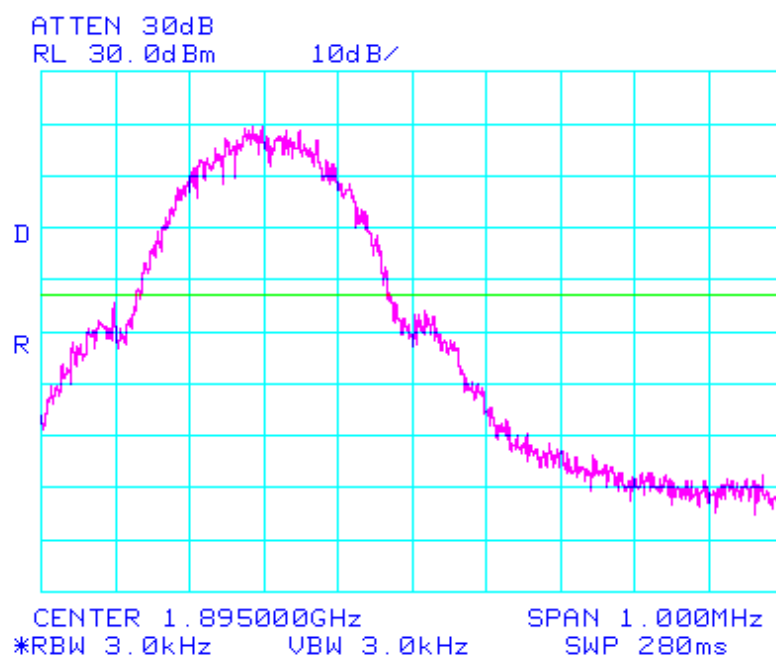

PCS1900

Band Edge Ch. 737

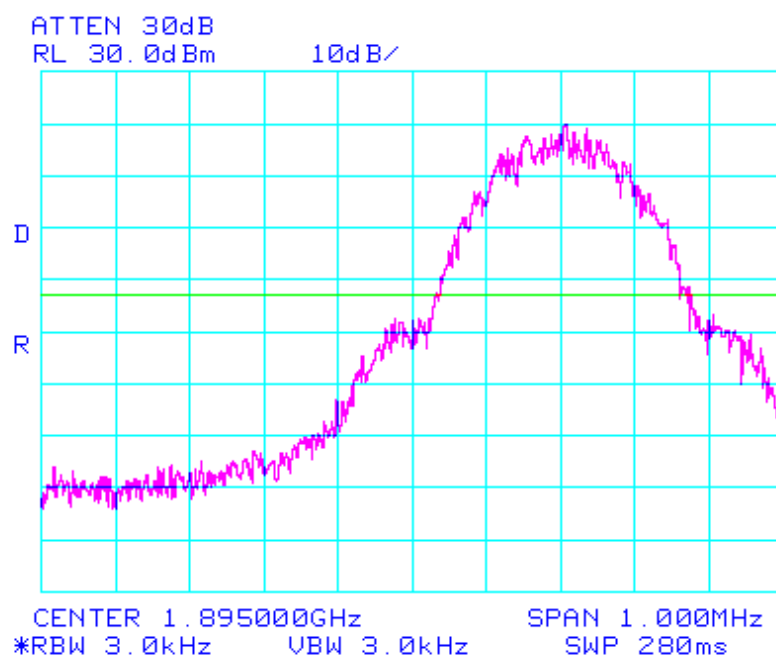

3.2.4 Spurious and Harmonic Emissions at Antenna Terminal


FCC ID	: SBWVK530US
Specification	: 47 CFR 2.1051, 24.238(a)
Tested Frequency	: 824.2MHz, 836.6MHz and 848.8MHz for GSM850 1850.2MHz, 1880.0MHz and 1909.8MHz for PCS1900

Measurement Procedure:

- The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.
- The spectrum is scanned from the lowest frequency generated in the equipment up to 10 GHz.
- Spectrum analyzer plots are included on the following pages.


GSM850

Spurious Emissions at Antenna Terminal / Ch.128 -1

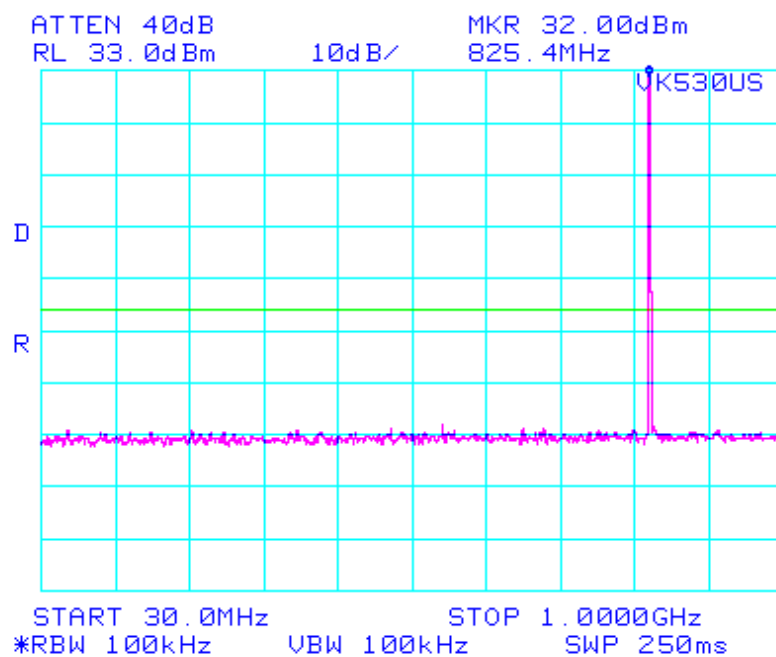


GSM850

Spurious Emissions at Antenna Terminal / Ch.128 -2

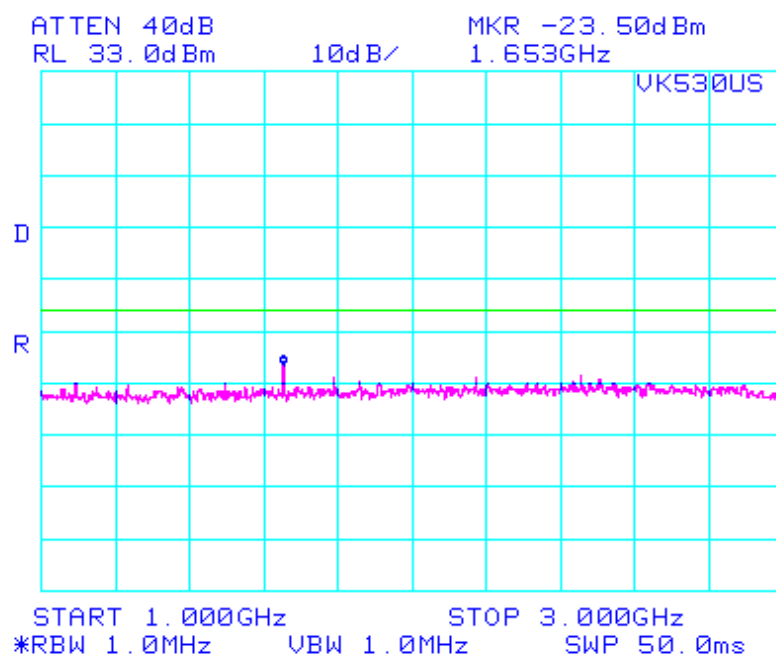


GSM850

Spurious Emissions at Antenna Terminal / Ch.128 -3

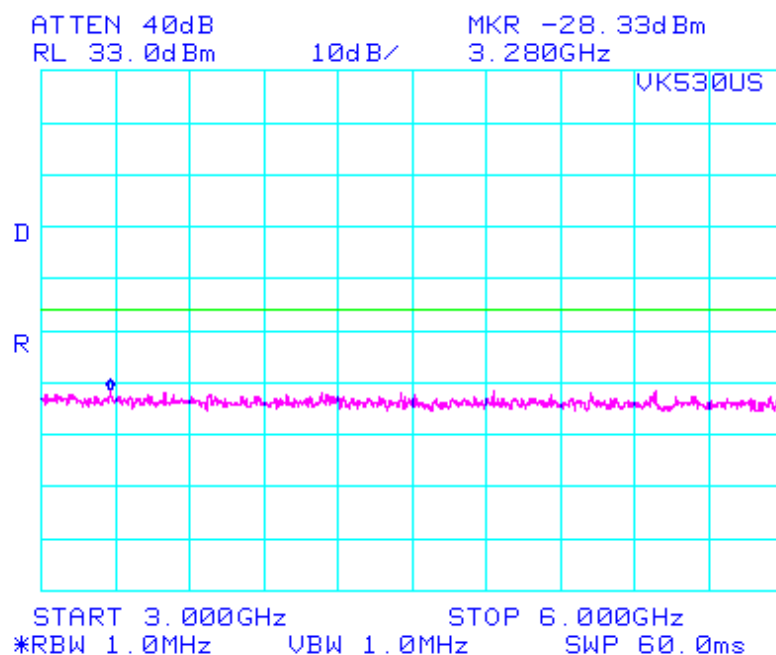


GSM850


Spurious Emissions at Antenna Terminal / Ch.128 -4

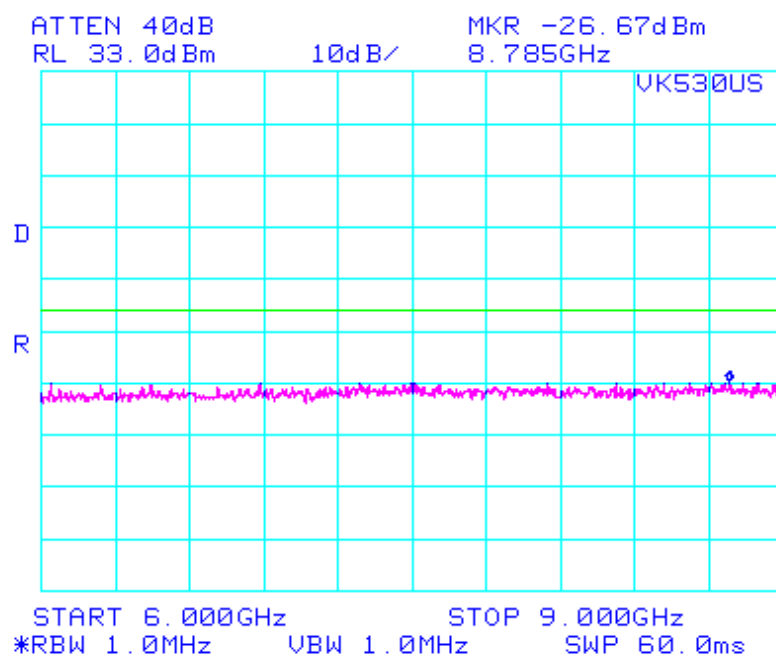

GSM850 Spurious Emissions at Antenna Terminal / Ch.190 -1

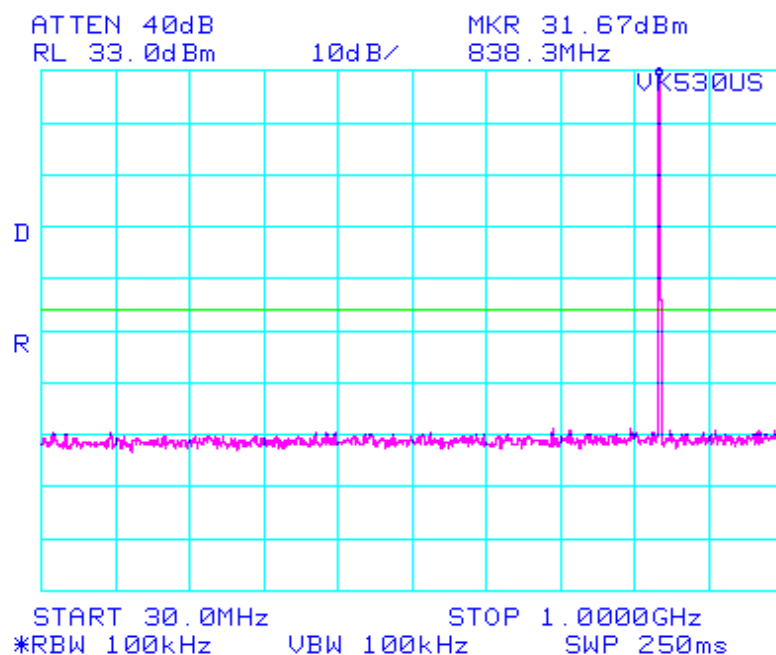


GSM850 Spurious Emissions at Antenna Terminal / Ch.190 -2

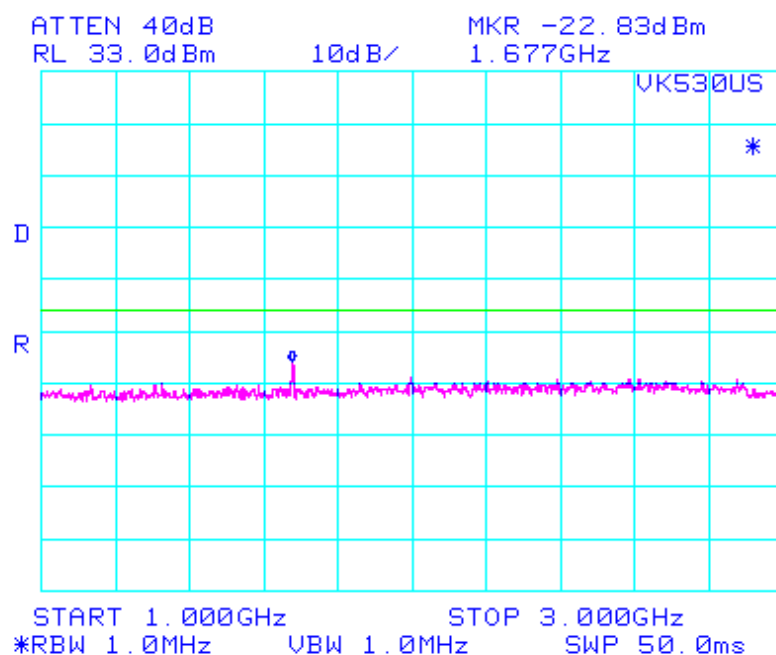


GSM850

Spurious Emissions at Antenna Terminal / Ch.190 -3

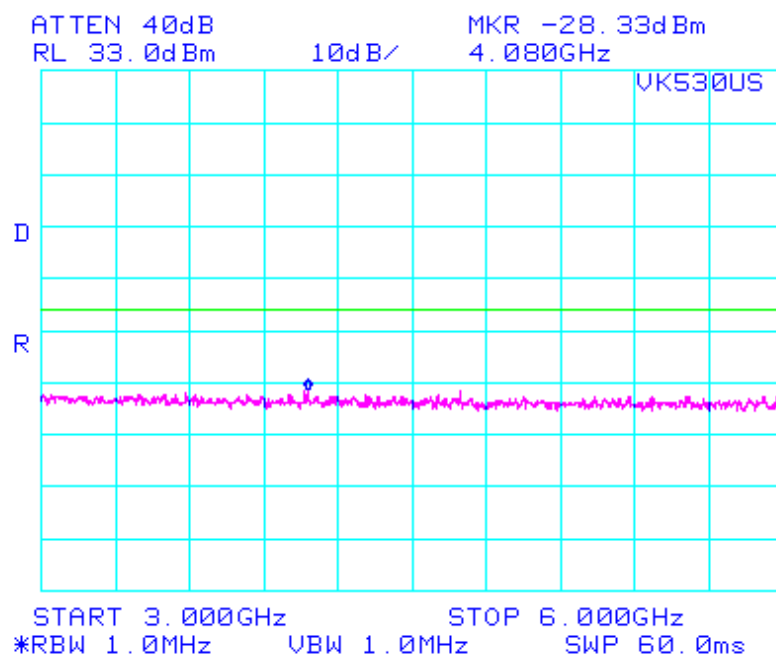


GSM850

Spurious Emissions at Antenna Terminal / Ch.190 -4

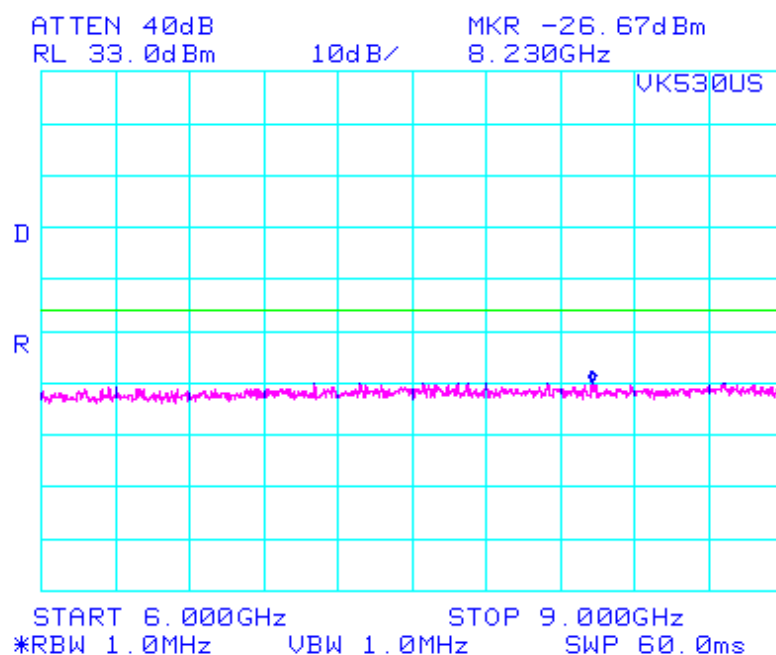


GSM850

Spurious Emissions at Antenna Terminal / Ch.251 -1

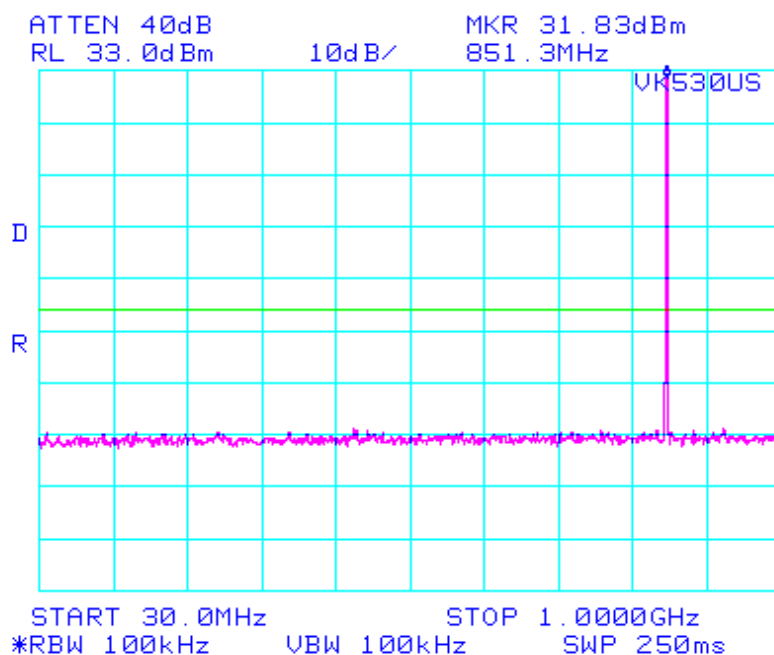


GSM850

Spurious Emissions at Antenna Terminal / Ch.251-2

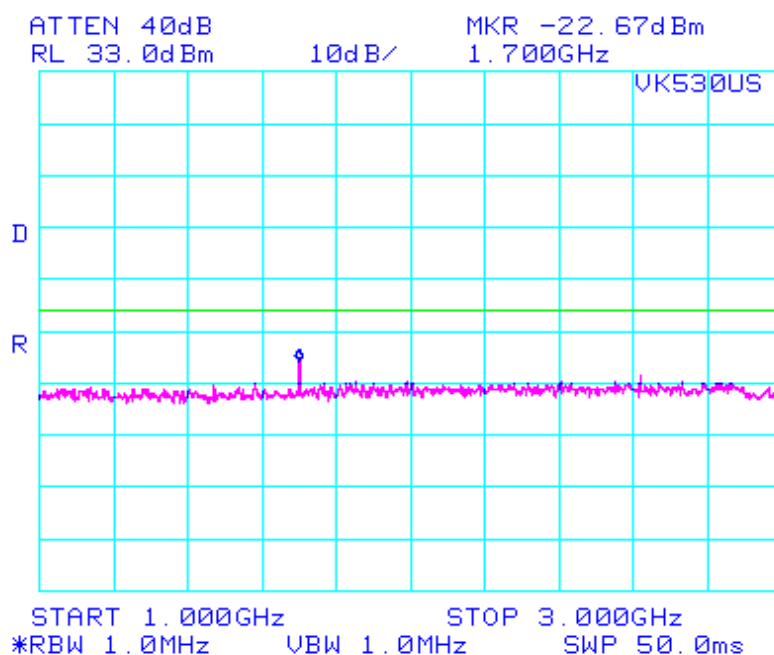


GSM850

Spurious Emissions at Antenna Terminal / Ch.251-3

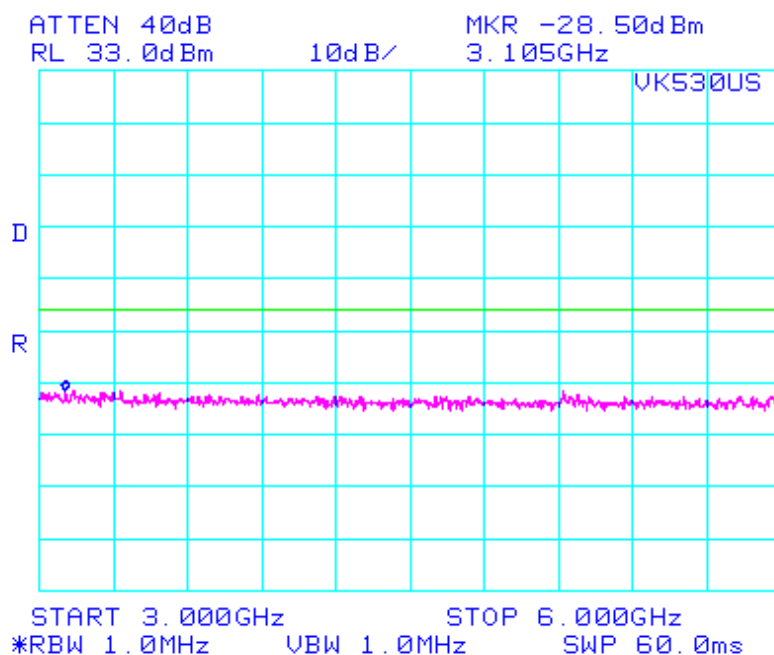


GSM850

Spurious Emissions at Antenna Terminal / Ch.251-4

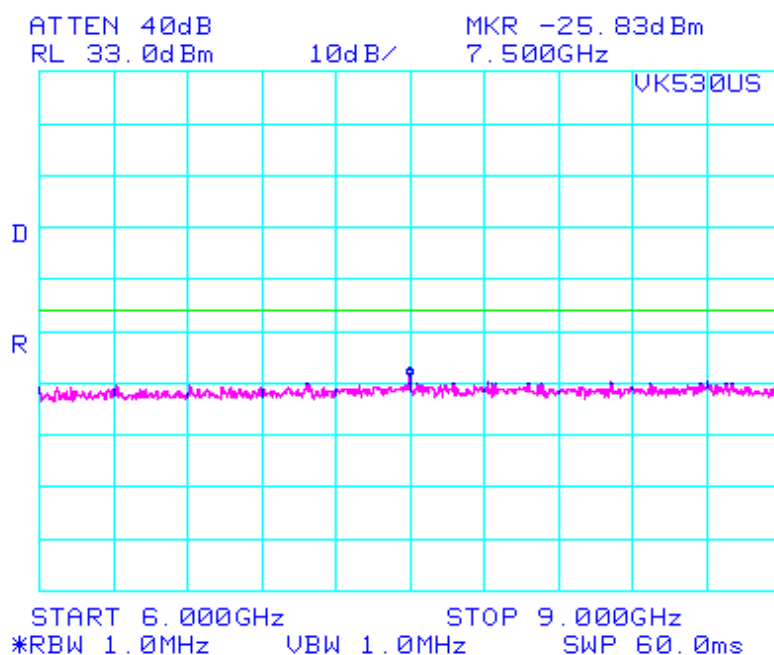


PCS1900

Spurious Emissions at Antenna Terminal / Ch.512 -1

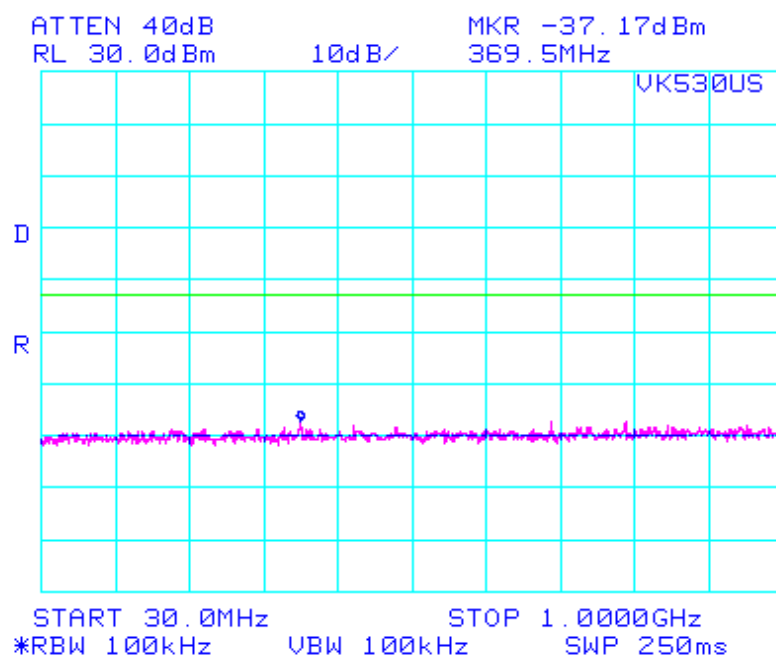


PCS1900

Spurious Emissions at Antenna Terminal / Ch.512 -2

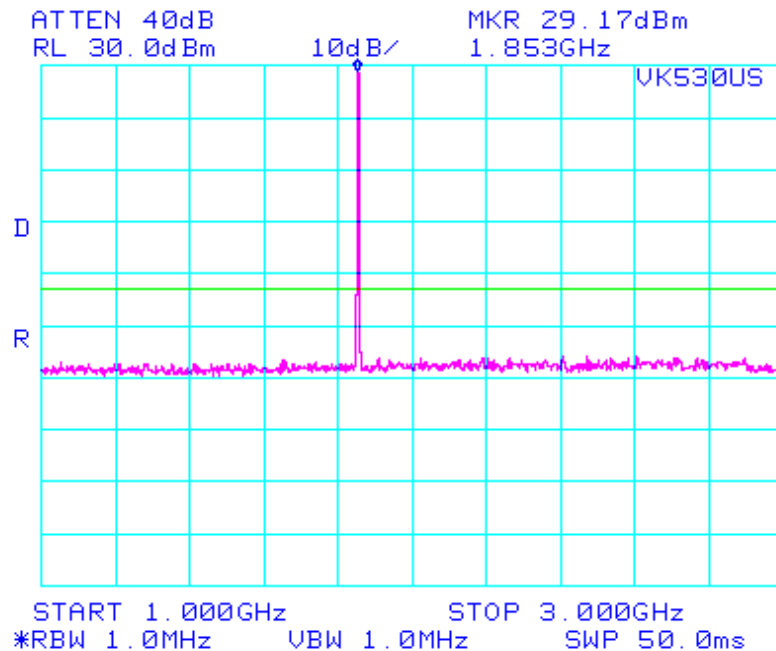


PCS1900

Spurious Emissions at Antenna Terminal / Ch.512 -3

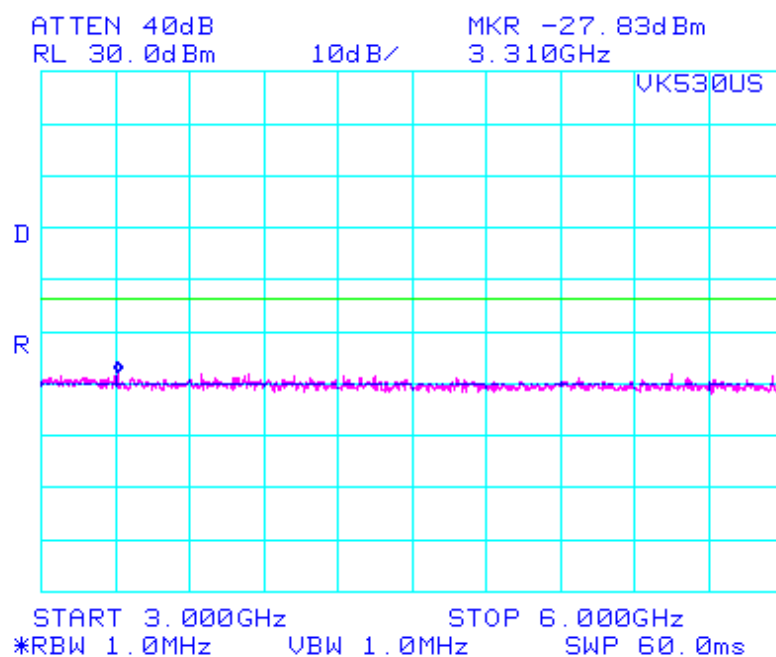


PCS1900

Spurious Emissions at Antenna Terminal / Ch.512 -4

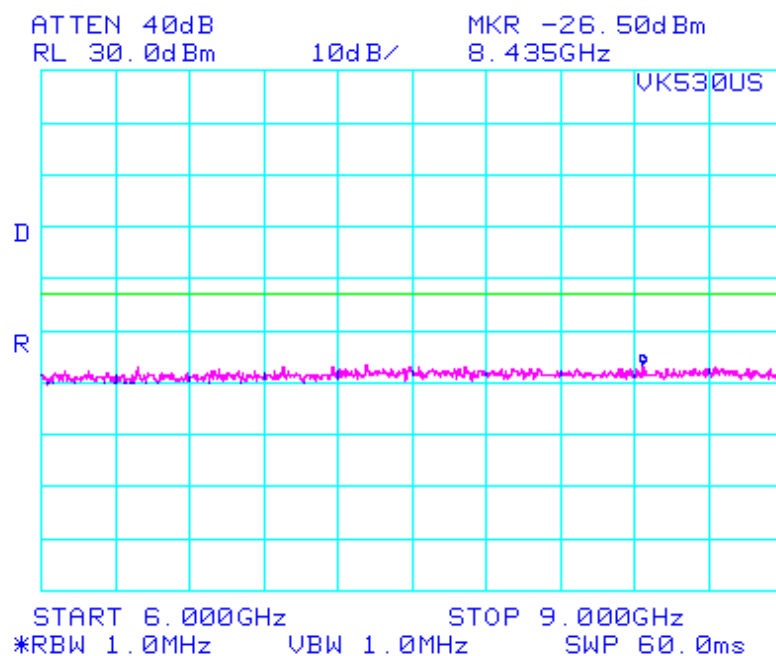


PCS1900

Spurious Emissions at Antenna Terminal / Ch.661 -1

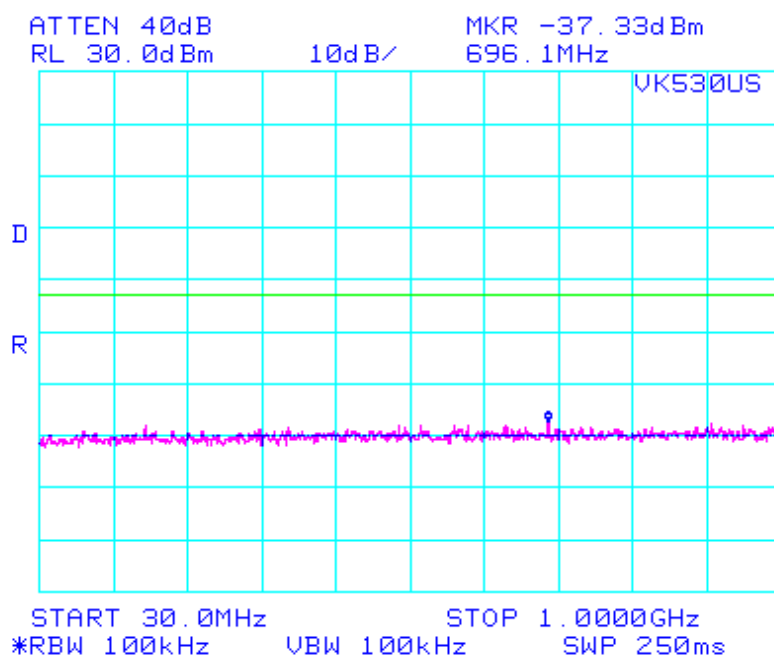


PCS1900

Spurious Emissions at Antenna Terminal / Ch.661 -2

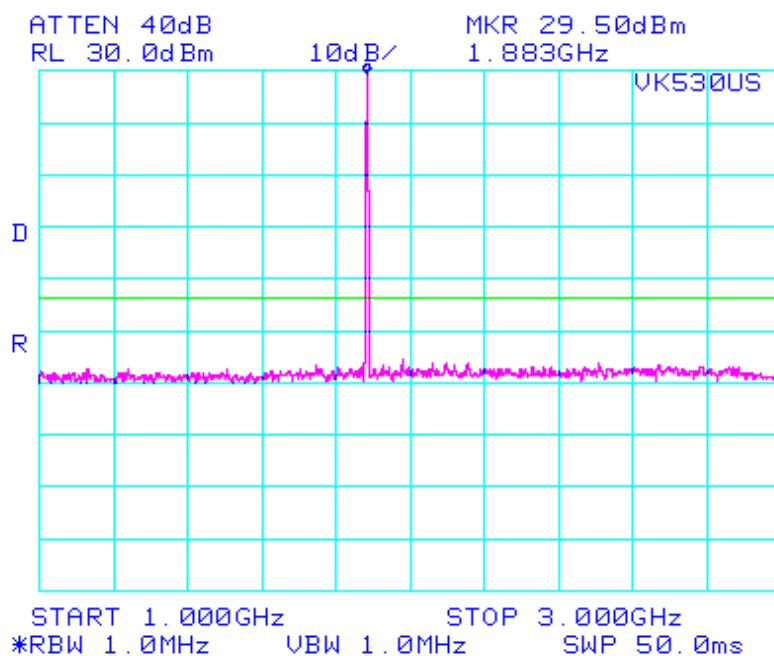


PCS1900

Spurious Emissions at Antenna Terminal / Ch.661 -3

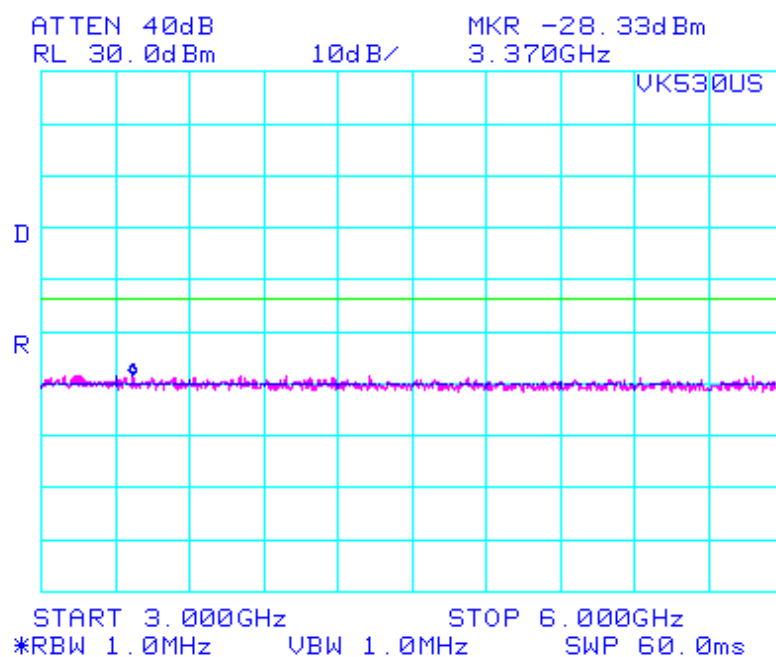


PCS1900

Spurious Emissions at Antenna Terminal / Ch.661 -4

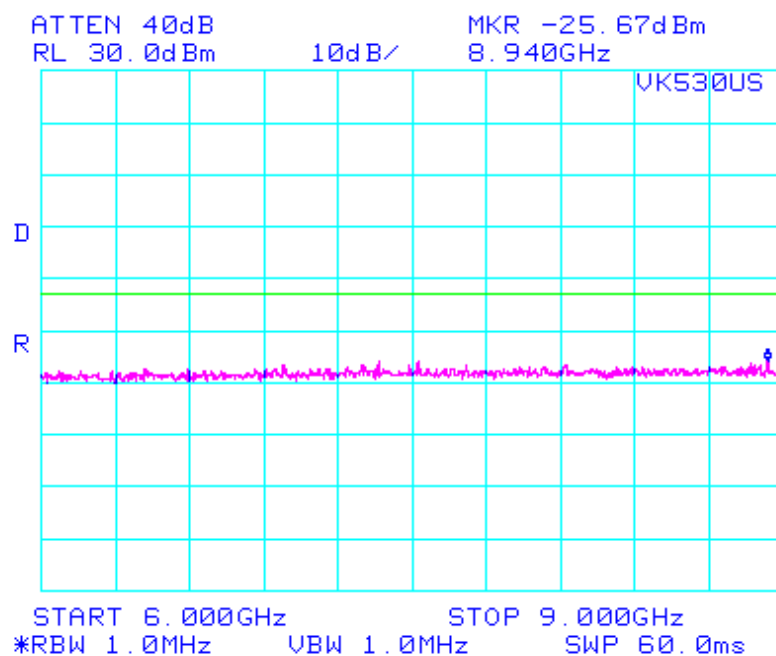


PCS1900

Spurious Emissions at Antenna Terminal / Ch.810 -1

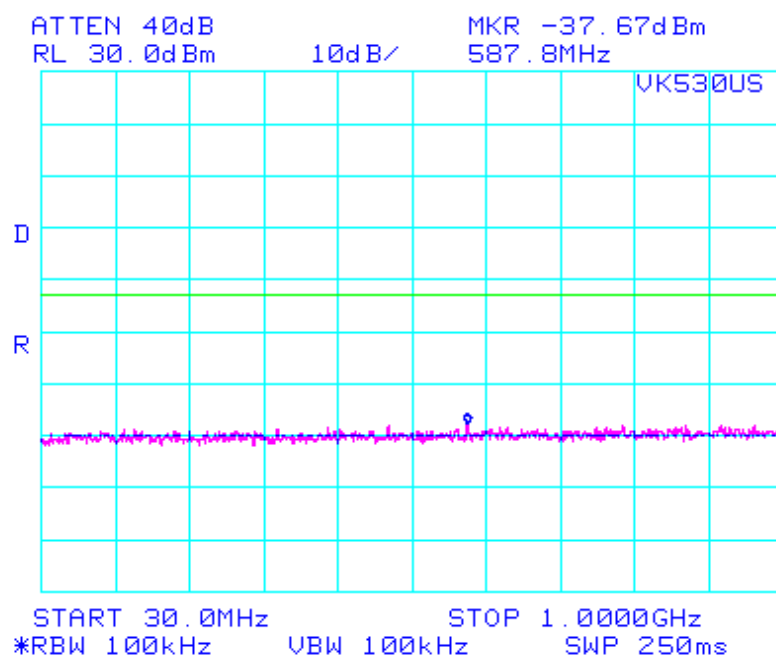


PCS1900

Spurious Emissions at Antenna Terminal / Ch.810 -2

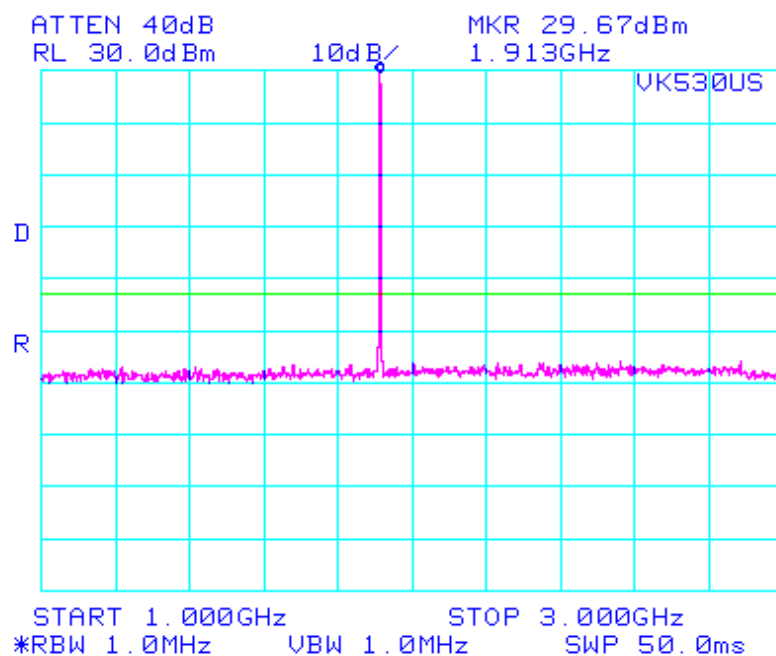


PCS1900

Spurious Emissions at Antenna Terminal / Ch.810 -3

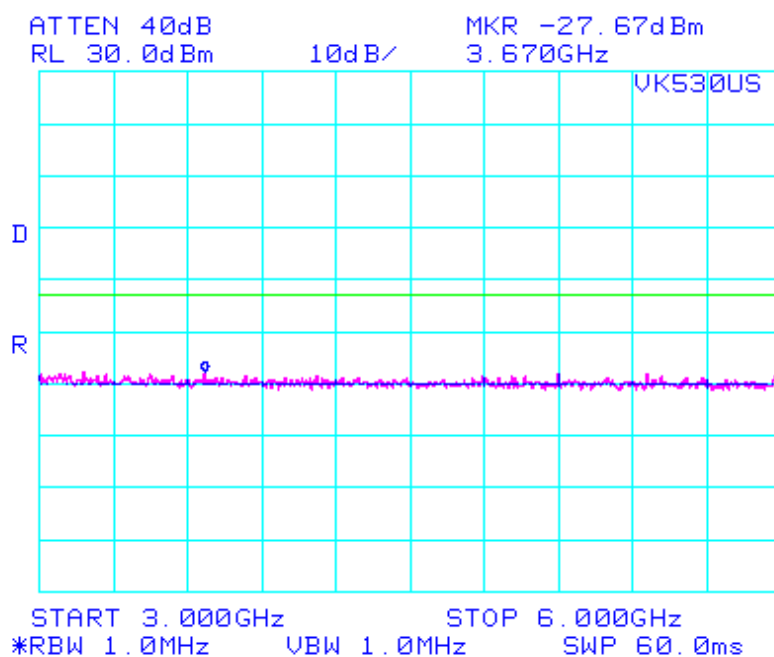

PCS1900

Spurious Emissions at Antenna Terminal / Ch.810 -4

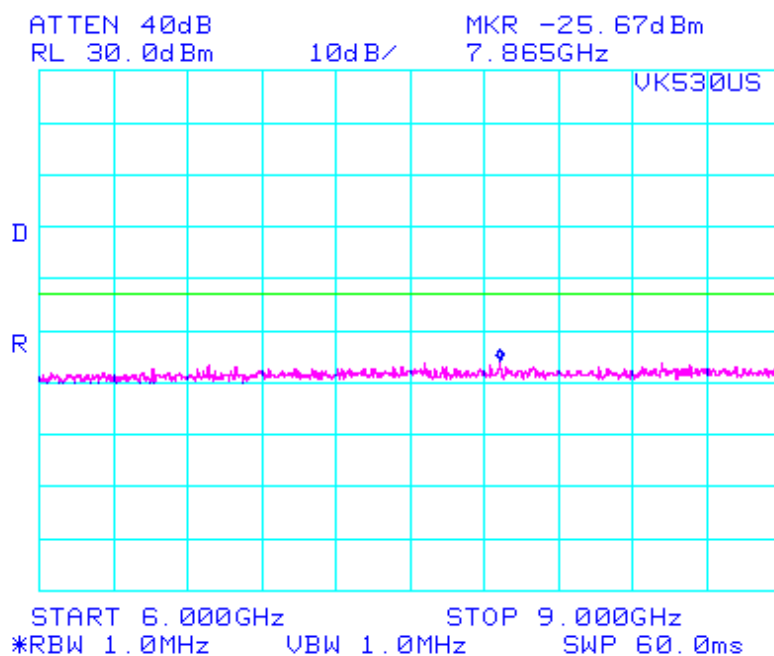

3.2.5 Field Strength of Spurious Radiation

FCC ID	: SBWVK530US
Specification	: 47 CFR 2.1053(a)
Tested Frequency	: 824.2MHz, 836.6MHz and 848.8MHz for GSM850 1850.2MHz, 1880.0MHz and 1909.8MHz for PCS1900

Measurement Procedure:

- Radiation and harmonic emissions are measured outdoors at our 3-meter test range. The equipment under test is placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

GSM850 Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY : 824.2 MHz
 CHANNEL : 128(Low)
 MEASURED OUTPUT POWER : 32.71 dBm = 1.87 W
 MODULATION SIGNAL : GSM (Internal)
 DISTANCE : 3 meters
 LIMIT : $43 + 10 \log_{10} (W) =$ 45.71 dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1648.4	-36.34	6.3	-30.34	V	-63.05
2472.6	-41.50	9.1	-32.46	V	-65.17
3296.8	-64.78	9.0	-55.78	V	-88.49
-	-	-	-	-	-

NOTE

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

GSM850 Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY : 836.6 MHz
 CHANNEL : 190(Mid)
 MEASURED OUTPUT POWER : 32.71 dBm = 1.87 W
 MODULATION SIGNAL : GSM (Internal)
 DISTANCE : 3 meters
 LIMIT : $43 + 10 \log_{10} (W) =$ 45.71 dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1673.2	-37.77	6.3	-31.47	V	-64.18
2509.8	-44.75	9.1	-35.65	V	-68.36
3346.4	-67.34	9.0	-58.34	V	-91.05
-	-	-	-	-	-

NOTE

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

GSM850 Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY : 848.8 MHz
 CHANNEL : 251(High)
 MEASURED OUTPUT POWER : 32.71 dBm = 1.87 W
 MODULATION SIGNAL : GSM (Internal)
 DISTANCE : 3 meters
 LIMIT : $43 + 10 \log_{10} (W) =$ 45.71 dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1697.6	-40.47	6.3	-34.17	V	-66.88
2546.4	-42.46	9.1	-33.36	V	-66.07
3395.2	-63.61	9.0	-54.61	V	-87.32
-	-	-	-	-	-

NOTE

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

PCS1900 Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY : 1850.2 MHz
 CHANNEL : 512(Low)
 MEASURED OUTPUT POWER : 30.67 dBm = 1.17 W
 MODULATION SIGNAL : GSM (Internal)
 DISTANCE : 3 meters
 LIMIT : $43 + 10 \log_{10} (W) =$ 43.67 dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3700.4	-58.41	9.5	-48.91	V	-79.58
5550.6	-68.47	11.1	-57.37	V	-88.04
-	-	-	-	-	-
-	-	-	-	-	-

NOTE

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

PCS1900 Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY : 1880.0 MHz
CHANNEL : 661(Mid)
MEASURED OUTPUT POWER : 30.67 dBm = 1.17 W
MODULATION SIGNAL : GSM (Internal)
DISTANCE : 3 meters
LIMIT : $43 + 10 \log_{10} (W) =$ 43.67 dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3760.0	-55.8	9.5	-46.35	V	-77.02
5640.0	-66.87	11.1	-55.77	V	-86.44
-	-	-	-	-	-
-	-	-	-	-	-

NOTE

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

PCS1900 Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY : 1909.8 MHz
 CHANNEL : 810(High)
 MEASURED OUTPUT POWER : 30.67 dBm = 1.17 W
 MODULATION SIGNAL : GSM (Internal)
 DISTANCE : 3 meters
 LIMIT : $43 + 10 \log_{10} (W) =$ 43.67 dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3819.6	-56.62	9.5	-47.12	V	-77.79
5729.4	-67.44	11.1	-56.34	V	-87.01
-	-	-	-	-	-
-	-	-	-	-	-

NOTE

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

3.2.6 Frequency Stability/Temperature Variation.

FCC ID	: SBWVK530US
Specification	: 47 CFR 2.1055 , 24.235
Tested Frequency	: 836.6MHz for GSM850 1880.0MHz for PCS1900

Measurement Procedure:

The frequency stability of the transmitter is measured by:

- a) **Temperature** :The temperature is varied from -30°C to + 50°C using an environmental chamber.
- b) **Primary Supply Voltage** :The primary supply voltage is varied from 85% to 115% of the voltage Normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification –The minimum frequency stability shall be +/- 0.00025% at any time during normal operation.

Specification — The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 0.00025 (± 2.5 ppm) of the center frequency.

Time Period and Procedure:


1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27 °C to provide a reference)
2. The equipment is subjected to an overnight “soak” at -30°C without any power applied.
3. After the overnight ”soak” at -30°C(usually 14-16 hours),the equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency to the transmitter and the individual oscillators is made within a three minute interval after applying power to the transmitter.
4. Frequency measurements is made at 10°C interval up to room temperature. At least a period of one and one half hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency were made at 10intervals starting at -30°C up to +50°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.

Frequency Stability (GSM850)

OPERATING FREQUENCY : 836,600,000 Hz
 CHANNEL : 190(Mid)
 REFERENCE VOLTAGE : 3.7 VDC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm


VOLTAGE (%)	POWER (VDC)	TEMP (dB)	FREQ (Hz)	Deviation (%)
100%	3.7	+20(Ref)	836,600,012	0.000001
100%		-30	836,600,045	0.000005
100%		-20	836,600,014	0.000002
100%		-10	836,600,022	0.000003
100%		0	836,600,017	0.000002
100%		+10	836,600,015	0.000002
100%		+20	836,600,012	0.000001
100%		+25	836,600,022	0.000003
100%		+30	836,600,025	0.000003
100%		+40	836,600,032	0.000004
100%		+50	836,600,045	0.000005
85%	3.2	+20	836,600,023	0.000003
115%	4.2	+20	836,600,011	0.000001
BATT.ENDPOINT	2.84	+20	836,600,024	0.000003

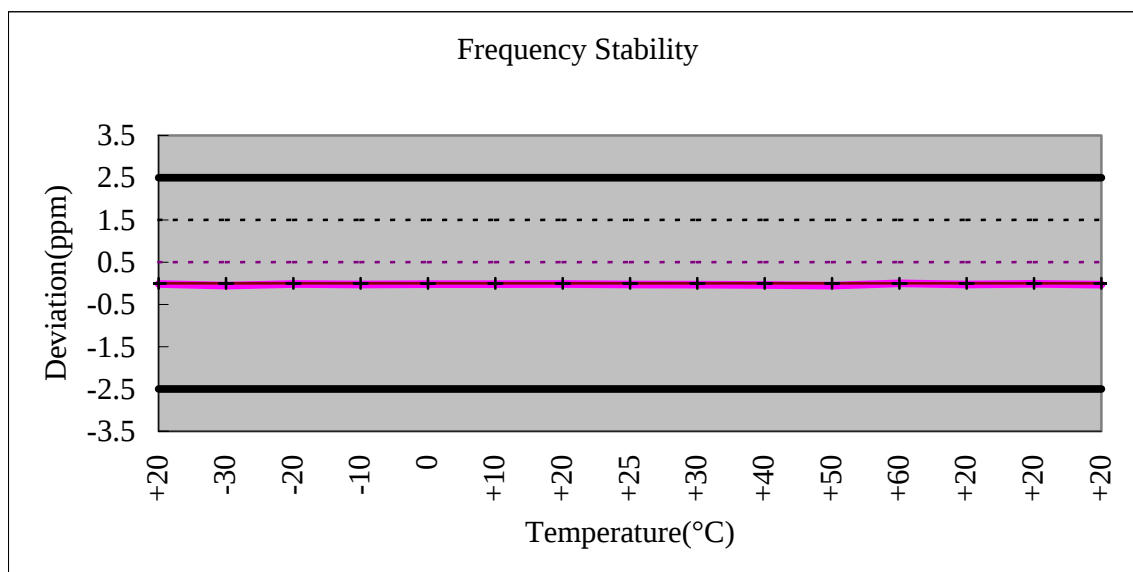

Frequency Stability (PCS1900)

OPERATING FREQUENCY : 1,880,000,000 Hz
 CHANNEL : 0661(Mid)
 REFERENCE VOLTAGE : 3.7 VDC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (dB)	FREQ (H/A)	Deviation (%)
100%	3.7	+20(Ref)	1,880,000,021	0.000001
100%		-30	1,880,000,068	0.000004
100%		-20	1,880,000,055	0.000003
100%		-10	1,879,999,977	-0.000001
100%		0	1,880,000,017	0.000001
100%		+10	1,880,000,025	0.000001
100%		+20	1,880,000,021	0.000001
100%		+25	1,879,999,982	-0.000001
100%		+30	1,880,000,049	0.000003
100%		+40	1,880,000,043	0.000002
100%		+50	1,880,000,066	0.000004
85%	3.2	+20	1,880,000,029	0.000002
115%	4.2	+20	1,879,999,979	-0.000001
BATT.ENDPOINT	2.84	+20	1,880,000,018	0.000001

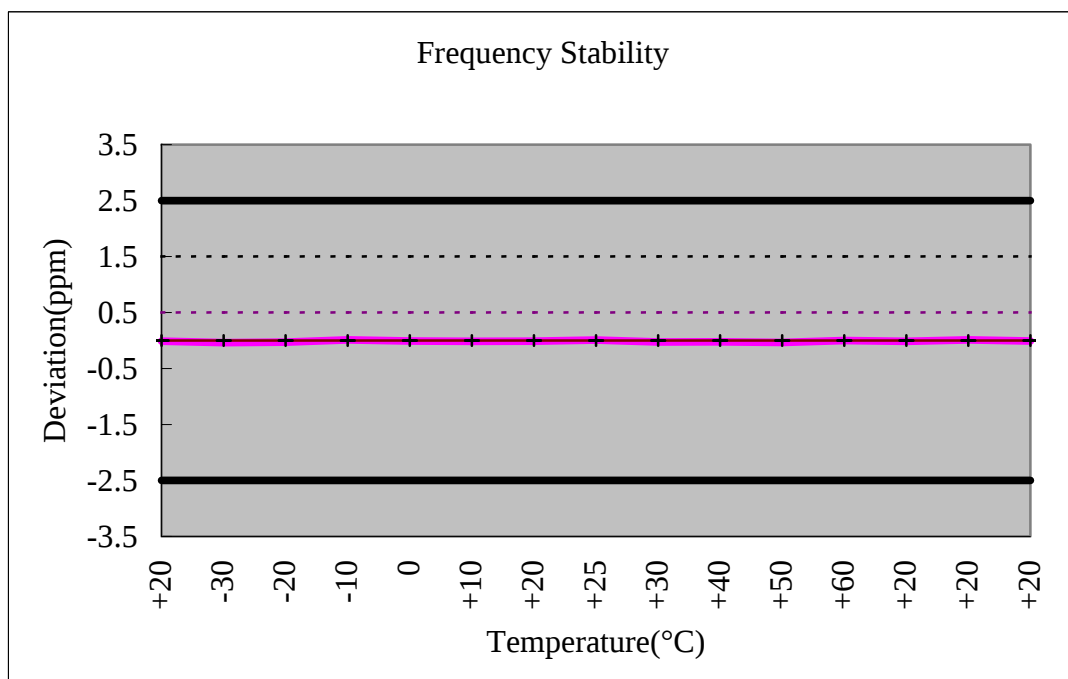

3.2.7 Receiver Radiated Emission

FCC ID : **SBWVK530US**
 Specification : 47 CFR 2.1053
 Bandwidth : 120kHz (< 1GHz)
 1 Mz (> 1GHz)
 Tested mode : GSM and PCS mode

Measurement Procedure:

- Final test was performed according to ANSI C63.4-2001 at the open field test site. There are no deviations from the standard.
- The EUT was placed in a 0.8m high table along with the peripherals. The turn table was separated from the antenna distance 3meters. Cables were placed in a position to produce maximum emissions as determined by experimentation, and operation mode was selected for maximum.
- The frequencies and amplitudes of maximum emission were measured at varying azimuths, antenna heights and antenna polarities. Reported are maximized emission levels.
- These tests were performed at 120kHz of 6dB bandwidth.

Measurement Data

GSM850

Frequency [MHz]	ANT Pol.	Reading [dB μ V]	T.F [dB]	Results [dB μ V/m]	Limits [dB μ V/m]	Margin [dB]
	No emissions were detected at a level greater than 10dB below limit.					

PCS1900

Frequency [MHz]	ANT Pol.	Reading [dB μ V]	T.F [dB]	Results [dB μ V/m]	Limits [dB μ V/m]	Margin [dB]
	No emissions were detected at a level greater than 10dB below limit.					

Remark

1. There is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit for the frequency being investigated.
2. Measurements above 1GHz is performed using a minimum resolution bandwidth of 1MHz.
The EUT was tested up to the 20GHz and no significant emission was found.

3.2.5 Conducted Emission

FCC ID	: SBWVK530US
Specification	: 47 CFR 15.107/207
Bandwidth	: 9kHz
Tested mode	: GSM and PCS mode

Measurement Procedure:

- The power line conducted interference measurements were performed according to ANSI C63.4-2001 in a shielded enclosure with peripherals placed on a table, 0.8m high over a metal floor. It was located more than required distance away from the shielded enclosure wall. There are no deviations from the standard.
- The EUT was plugged into the LISN and the frequency range of interest scanned.
- Reported are maximized emission levels.
- These tests were performed at 9kHz of 6dB bandwidth.

Measurement Data


- The measurement plots are included on the following pages.

Minimum Standard: FCC Part 15.207(a)/EN 55022


Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

GSM 850 / Conducted Emission / Neutral Graph

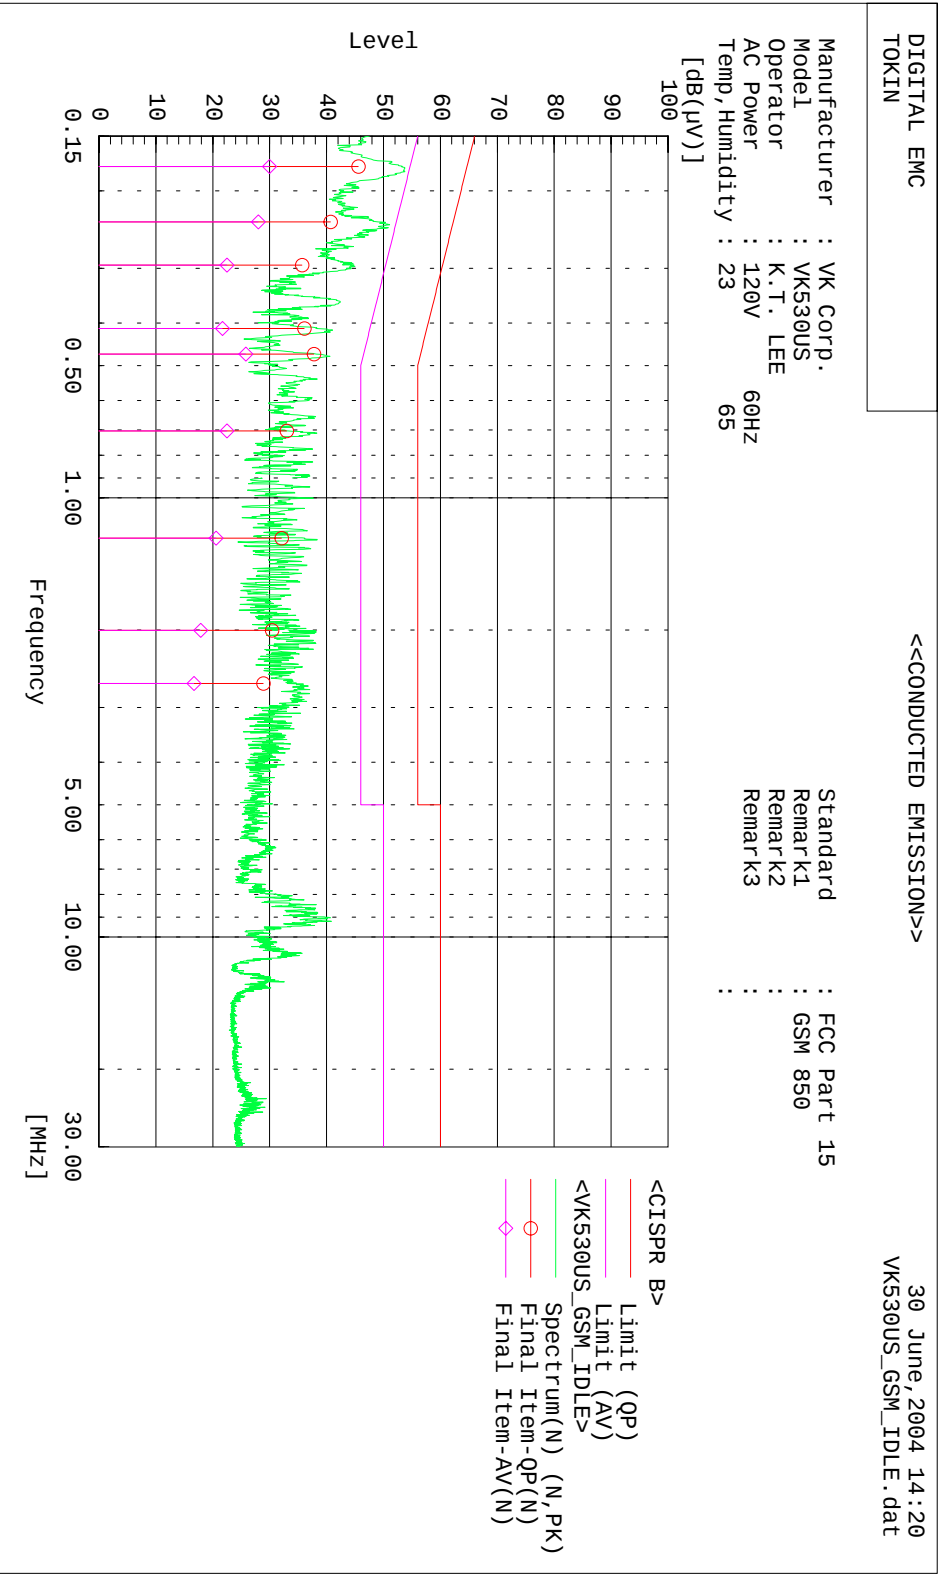

GSM 850 / Conducted Emission / Line Graph

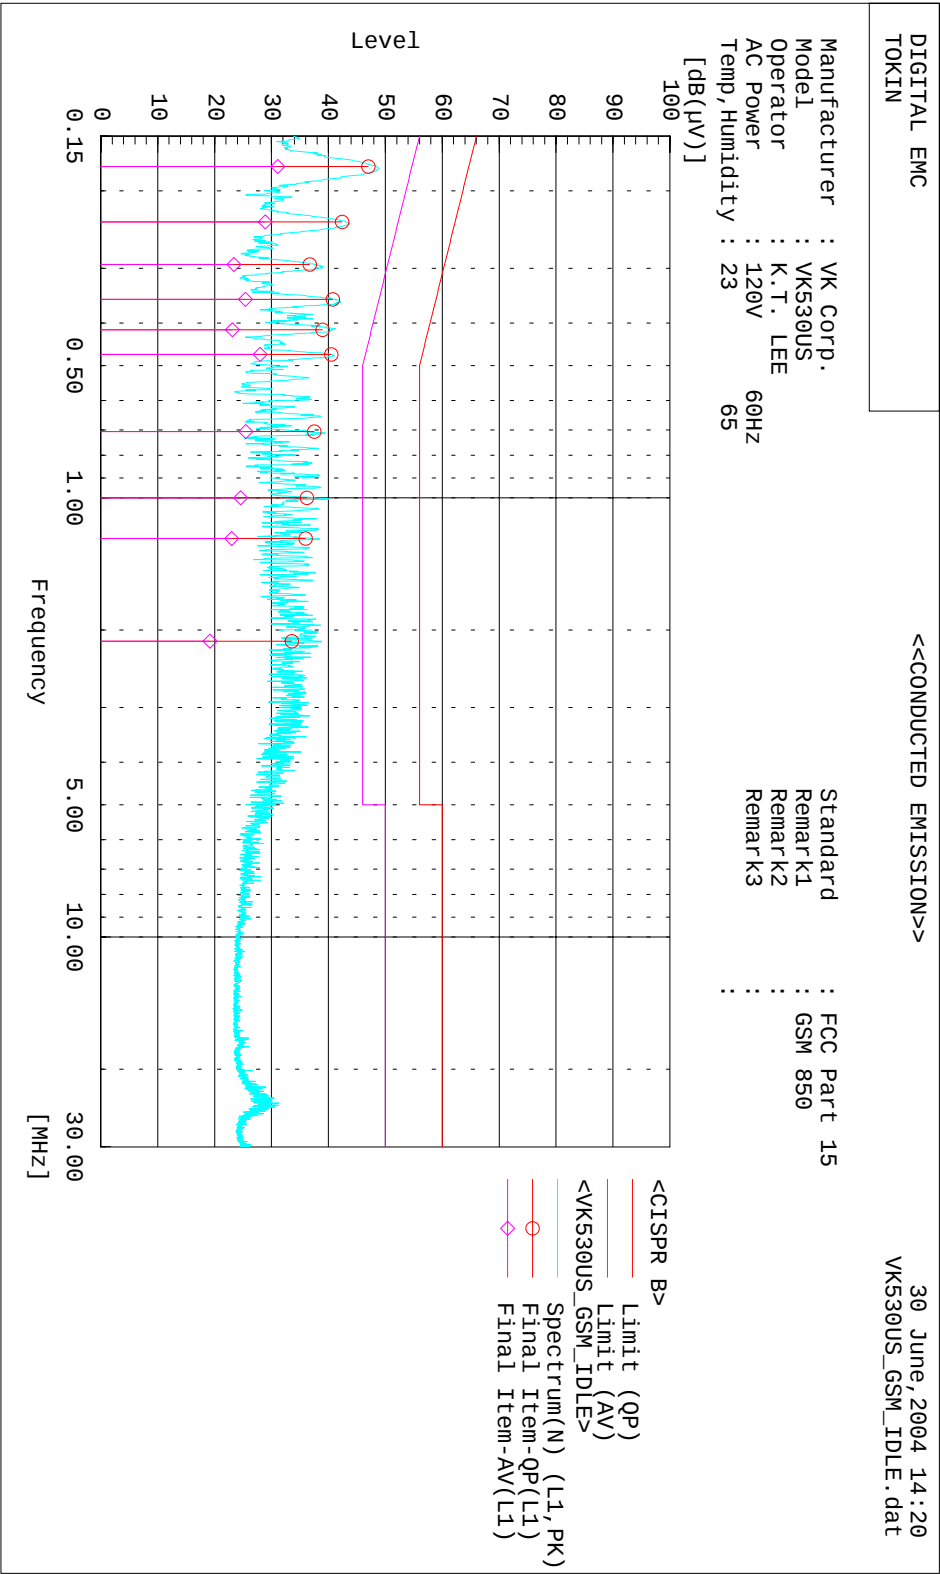

 <<CONDUCTED EMISSION>>

30 June 2004 14:20
 VK530US_GSM_IDLE.dat


Standard : FCC Part 15
 Manufacturer : VK Corp.
 Model : VK530US
 Operator : K.T. LEE
 AC Power : 120V 60Hz
 Temp, Humidity : 23 65
 Remark1 : GSM 850
 Remark2 :
 Remark3 :

 Final Result

GSM 850 / Conducted Emission / Data

--- N Phase ---													
No.	Frequency	Reading	Reading	c.f	Result	Result	Limit	Limit	Margin	Margin	Remark		
		QP	AV		QP	AV	QP	AV	QP	AV			
	[MHz]	[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]			
1	0.176	44.2	28.6	1.4	45.6	30.0	64.7	54.7	19.1	24.7			
2	0.235	39.7	27.0	1.0	40.7	28.0	62.3	52.3	21.6	24.3			
3	0.295	34.9	21.7	0.8	35.7	22.5	60.4	50.4	24.7	27.9			
4	0.411	35.7	21.3	0.4	36.1	21.7	57.6	47.6	21.5	25.9			
5	0.470	37.5	25.5	0.3	37.8	25.8	56.5	46.5	18.7	20.7			
6	0.704	32.7	22.2	0.3	33.0	22.5	56.0	46.0	23.0	23.5			
7	1.235	31.9	20.4	0.2	32.1	20.6	56.0	46.0	23.9	25.4			
8	2.002	30.2	17.7	0.2	30.4	17.9	56.0	46.0	25.6	28.1			
9	2.647	28.6	16.4	0.3	28.9	16.7	56.0	46.0	27.1	29.3			
--- L1 Phase ---													
No.	Frequency	Reading	Reading	c.f	Result	Result	Limit	Limit	Margin	Margin	Remark		
		QP	AV		QP	AV	QP	AV	QP	AV			
	[MHz]	[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]			
1	0.176	45.7	29.8	1.3	47.0	31.1	64.7	54.7	17.7	23.6			
2	0.235	41.4	27.9	1.0	42.4	28.9	62.3	52.3	19.9	23.4			
3	0.294	35.9	22.6	0.8	36.7	23.4	60.4	50.4	23.7	27.0			
4	0.353	40.2	24.8	0.6	40.8	25.4	58.9	48.9	18.1	23.5			
5	0.414	38.5	22.6	0.5	39.0	23.1	57.6	47.6	18.6	24.5			
6	0.471	40.2	27.7	0.3	40.5	28.0	56.5	46.5	16.0	18.5			
7	0.706	37.2	25.2	0.3	37.5	25.5	56.0	46.0	18.5	20.5			
8	0.999	35.9	24.3	0.3	36.2	24.6	56.0	46.0	19.8	21.4			
9	2.119	33.4	19.0	0.2	33.6	19.2	56.0	46.0	22.4	26.8			
10	1.236	35.7	22.7	0.3	36.0	23.0	56.0	46.0	20.0	23.0			


PCS1900 / Conducted Emission / Neutral Graph

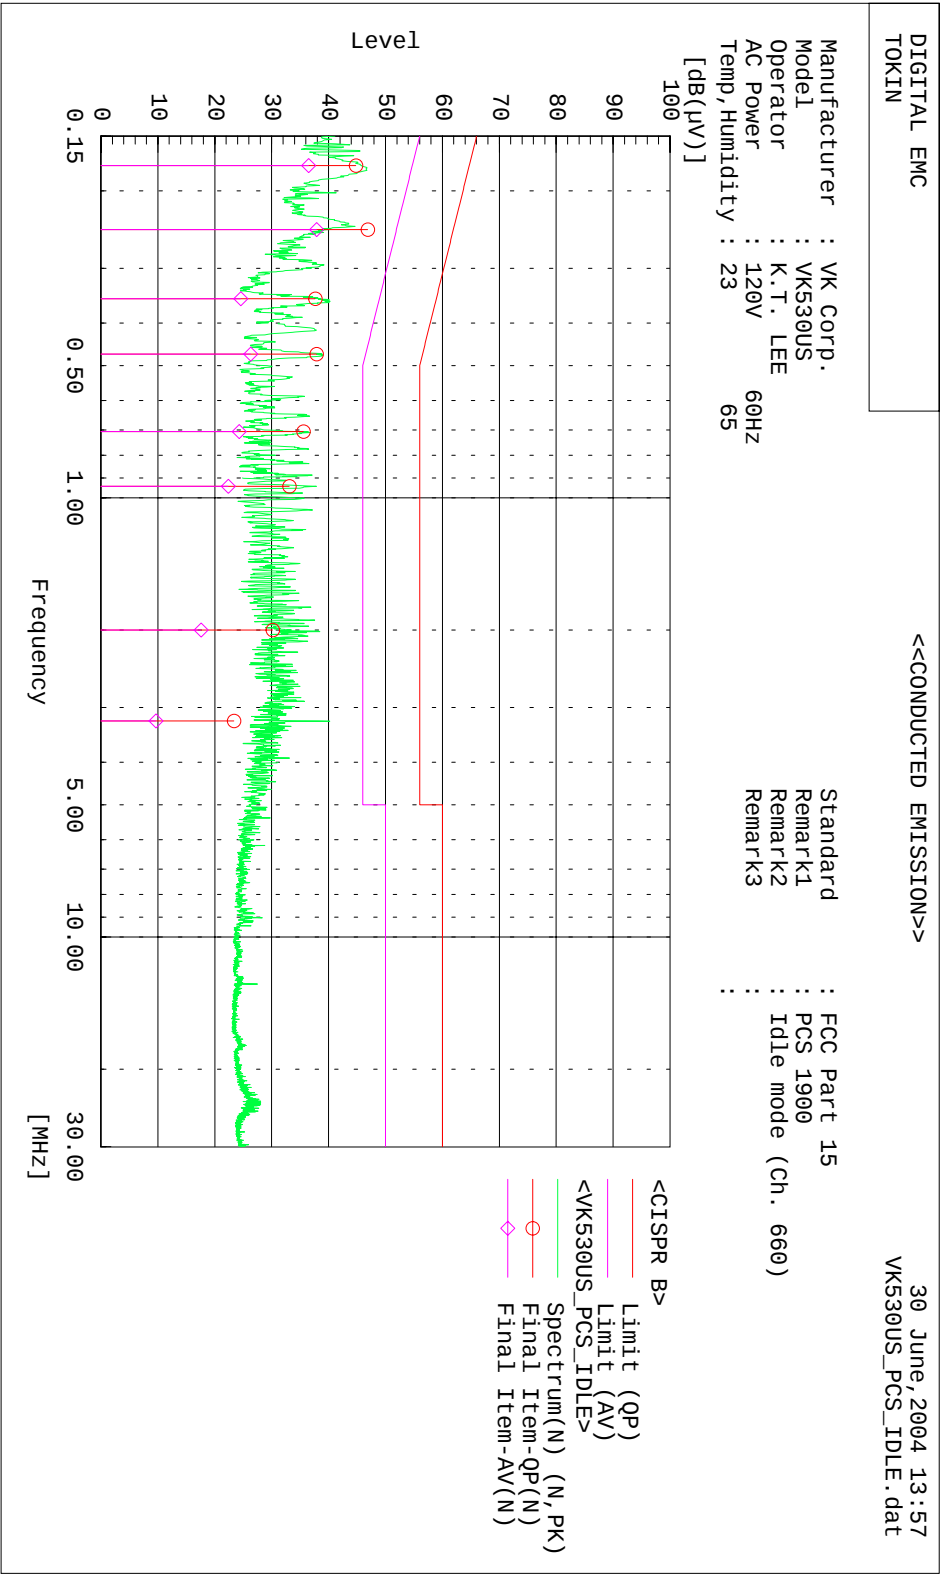

Copyright © 2004, DIGITAL EMC Co., Ltd.

Page 57 of 63

PCS1900 / Conducted Emission / Line Graph

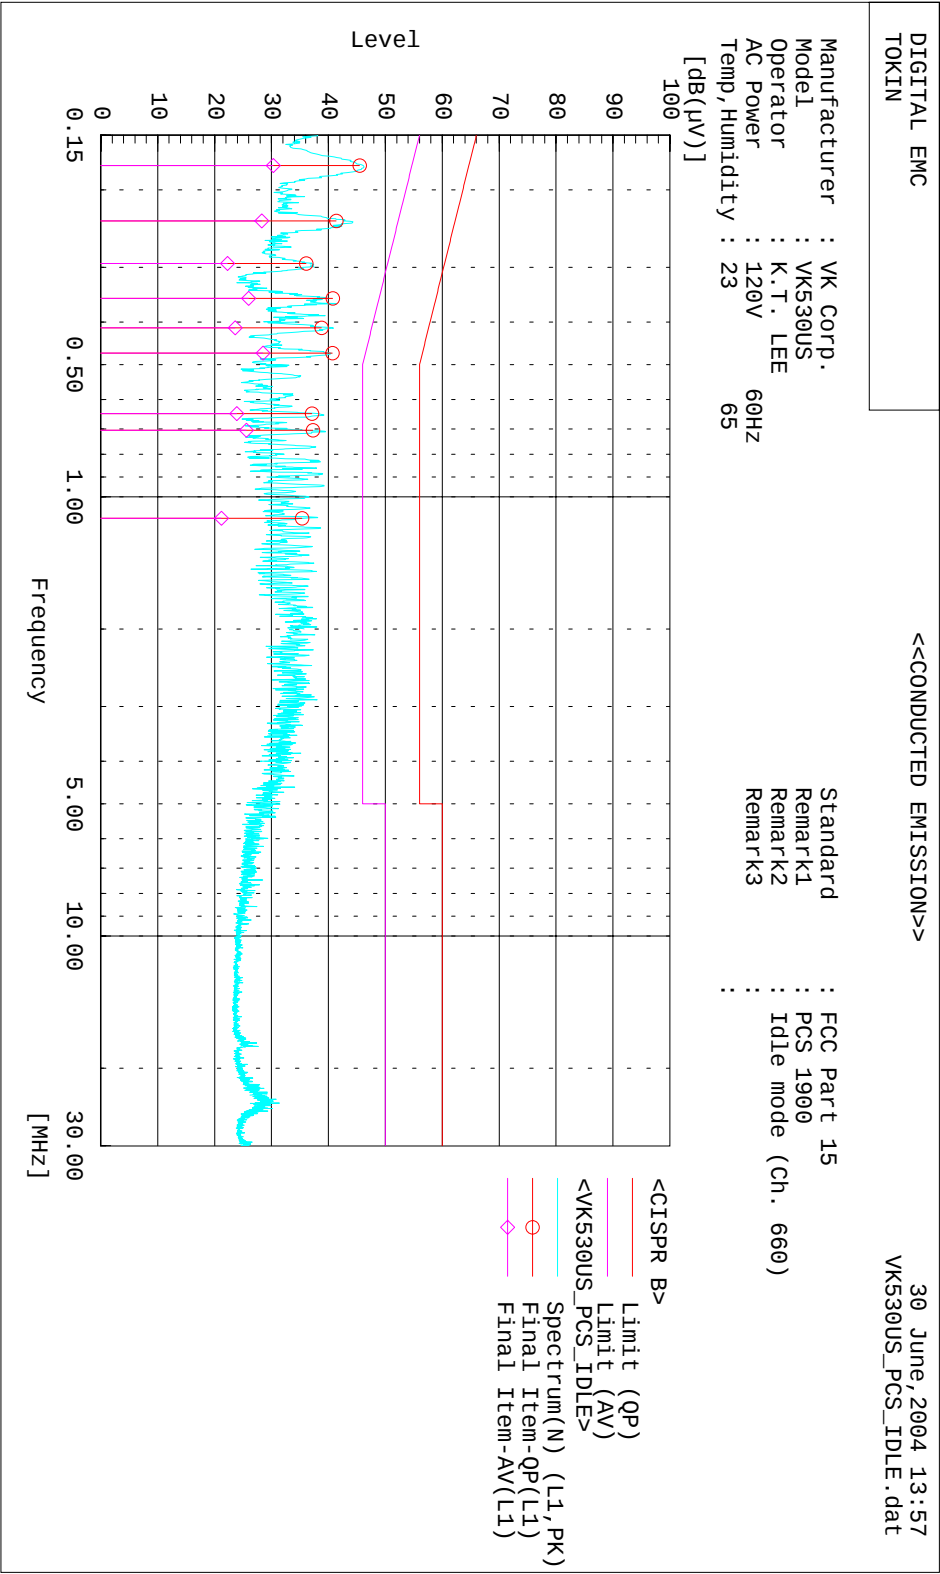

PCS1900 / Conducted Emission / Data

Standard : FCC Part 15
 Manufacturer : VK Corp.
 Model : VK530US
 Operator : K.T. LEE
 AC Power : 120V 60Hz
 Temp, Humidity : 23 65
 Remark1 : PCS 1900
 Remark2 : Idle mode (Ch. 660)
 Remark3 :

 Final Result

***** DIGITAL EMC *****
 <<CONDUCTED EMISSION>>

30 June, 2004 13:57
 VK530US_PCS_IDLE.dat

--- N Phase ---													
No.	Frequency	Reading QP	Reading AV	c.f	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV	Remark		
	[MHz]	[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]			
1	0.175	43.4	35.1	1.4	44.8	36.5	64.7	54.7	19.9	18.2			
2	0.245	46.0	37.0	0.9	46.9	37.9	61.9	51.9	15.0	14.0			
3	0.352	37.2	24.1	0.5	37.7	24.6	58.9	48.9	21.2	24.3			
4	0.470	37.6	26.0	0.3	37.9	26.3	56.5	46.5	18.6	20.2			
5	0.941	32.9	22.2	0.2	33.1	22.4	56.0	46.0	22.9	23.6			
6	1.998	30.0	17.4	0.2	30.2	17.6	56.0	46.0	25.8	28.4			
7	3.219	23.0	9.3	0.4	23.4	9.7	56.0	46.0	32.6	36.3			
8	0.706	35.3	24.0	0.3	35.6	24.3	56.0	46.0	20.4	21.7			
--- L1 Phase ---													
No.	Frequency	Reading QP	Reading AV	c.f	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV	Remark		
	[MHz]	[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]			
1	0.176	44.2	29.0	1.3	45.5	30.3	64.7	54.7	19.2	24.4			
2	0.235	40.4	27.3	1.0	41.4	28.3	62.3	52.3	20.9	24.0			
3	0.294	35.3	21.5	0.8	36.1	22.3	60.4	50.4	24.3	28.1			
4	0.353	40.2	25.4	0.6	40.8	26.0	58.9	48.9	18.1	22.9			
5	0.412	38.3	23.1	0.5	38.8	23.6	57.6	47.6	18.8	24.0			
6	0.470	40.4	28.2	0.3	40.7	28.5	56.5	46.5	15.8	18.0			
7	0.705	37.0	25.3	0.3	37.3	25.6	56.0	46.0	18.7	20.4			
8	0.646	36.8	23.6	0.3	37.1	23.9	56.0	46.0	18.9	22.1			
9	1.118	35.1	20.9	0.3	35.4	21.2	56.0	46.0	20.6	24.8			

4. TEST EQUIPMENT

	Type	Manufacturer	Model	Cal.Due.Date (dd/mm/yy)	S/N
01	Spectrum Analyzer	Agilent	E4404B	22/11/04	US41061134
02	Spectrum Analyzer	H.P	8563E	25/09/04	3551A04634
03	Power Meter	H.P	EPM-442A	16/07/04	GB37170413
04	Power Sensor	H.P	8481A	16/07/04	3318A96332
05	Frequency Counter	H.P	5342A	26/09/04	2119A04450
06	Multifunction Synthesizer	H.P	8904A	15/10/04	3633A08404
07	Signal Generator	H.P	8673D	26/09/04	2844A00753
08	Signal Generator	H.P	E4421A	29/04/05	US37230529
09	Signal Generator	H.P	8657A	26/05/05	3430U02049
10	Audio Analyzer	H.P	8903B	18/04/05	3011A0944B
11	Modulation Analyzer	H.P	8901B	21/04/05	3028A03029
12	Sensor Module	H.P	11722A	21/04/05	3111A04665
13	Oscilloscope	LeCroy	9314A	27/08/04	93144390
14	CDMA Mobile Station Test Set	H.P	8924C	09/09/04	US35360688
15	Power Splitter	WEINSCHEL	1593	23/04/05	332
16	BAND Reject Filter	Microwave circuits INC.	NO308372	22/12/04	3125-01DC0312
17	BAND Reject Filter	Wainwright	WRCG1750	19/08/04	SN2
18	AC Power supply	DAEKWANG	5KVA	03/04/05	N/A
19	DC Power Supply	H.P	6622A	24/03/05	465487
20	Attenuator (30dB)	H.P	8498A	23/05/05	50101
21	Attenuator (10dB)	WEINSCHEL	23-10-34	15/10/04	BP4387
22	HORN ANT	EMCO	3115	22/10/04	6419
23	HORN ANT	EMCO	3115	01/10/04	21097
24	HORN ANT	A.H.Systems	SAS-574	27/11/04	154
25	HORN ANT	A.H.Systems	SAS-574	14/11/04	155
26	Dipole Antenna	Schwarzbeck	VHA9103	04/10/04	2116

4. TEST EQUIPMENT (CONTINUED)

	Type	Manufacturer	Model	Cal.Due.Date (dd/mm/yy)	S/N
27	Dipole Antenna	Schwarzbeck	VHA9103	04/10/04	2117
28	Dipole Antenna	Schwarzbeck	UHA9105	04/10/04	2261
29	Dipole Antenna	Schwarzbeck	UHA9105	04/10/04	2262
30	RFI/FIELD Intensity Meter	Kyorits	KNM-504D	25/07/04	SN-161-4
31	Frequency Converter	Kyorits	KCV-604C	25/07/04	4-230-3
32	TEMP & HUMIDITY Chamber	JISCO	J-RHC2	14/09/04	021031
33	Log Periodic Antenna	Schwarzbeck	UHALP9108A1	23/10/04	1098
34	Biconical Antenna	Schwarzbeck	VHA9103	23/10/04	VHA91031946
35	Digital Multimeter	H.P	34401A	15/10/04	3146A13475
36	Attenuator (10dB)	WEINSCHEL	23-10-34	15/10/04	BP4386
37	High-Pass Filter	ANRITSU	MP526	12/05/05	M27756
38	Attenuator (3dB)	Agilent	8491B	15/10/04	58177
39	Wireless communication test set	Agilent	8960	10/11/04	GB41321167
40	RFI/FIELD Intensity Meter	Kyorits	KNW-2402	25/07/04	4N-170-3
41	LISN	Kyorits	KNW-407	29/08/04	8-317-8
42	LISN	Kyorits	KNW-242	22/08/04	8-654-15
43	Spectrum Analyzer	H.P	8591E	23/05/05	3649A05889
44	Software	ToYo EMI	EP5/CE	N/A	Ver 2.0.801
45	CVCF	NF Electronic	4400	N/A	344536 4420064

5. SAMPLE CALCULATIONS

A. Emission Designator

GSM850

Emission Designator = 252KGXW

GSM BW = 252 KHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

(Measured at the 99.75% power bandwidth)

PCS1900

Emission Designator = 253KGXW

GSM BW = 253 KHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

(Measured at the 99.75% power bandwidth)

6. CONCLUSION

The data collected shows that the **VK Corporation**. Dual band GSM phone **FCC ID: SBWVK530US** complies with all the requirements of Parts 2 , 22 and 24 of the FCC rules.