



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

802.11b/g/n USB Dongle

Trade Name / Model:
LanReady /WUB1920RS,
AirLink / AWLL6077 V2,
Wavecore / WV-120N,
Cerio / UW-200NU2,
Bluestork / BS-WN-USB/1

Issued to

LanReady Technologies Inc.
3F, No.116, Sinhu 2nd Rd., Neihu District,
Taipei City 114, Taiwan (R.O.C.)

Issued by

Compliance Certification Services Inc.
No. 11, Wu-Gong 6th Rd., Wugu Industrial Park,
Taipei Hsien 248, Taiwan (R.O.C.)
<http://www.ccsemc.com.tw>
service@ccsrf.com



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



TABLE OF CONTENTS

- 1. TEST RESULT CERTIFICATION.....3**
- 2. EUT DESCRIPTION4**
- 3. TEST METHODOLOGY5**
 - 3.1 EUT CONFIGURATION5
 - 3.2 EUT EXERCISE.....5
 - 3.3 GENERAL TEST PROCEDURES.....5
 - 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS6
 - 3.5 DESCRIPTION OF TEST MODES7
- 4. INSTRUMENT CALIBRATION.....8**
 - 4.1 MEASURING INSTRUMENT CALIBRATION8
 - 4.2 MEASUREMENT EQUIPMENT USED8
 - 4.3 MEASUREMENT UNCERTAINTY9
- 5. FACILITIES AND ACCREDITATIONS10**
 - 5.1 FACILITIES10
 - 5.2 EQUIPMENT.....10
 - 5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....11
- 6. SETUP OF EQUIPMENT UNDER TEST12**
 - 6.1 SETUP CONFIGURATION OF EUT.....12
 - 6.2 SUPPORT EQUIPMENT12
- 7. FCC PART 15.247 REQUIREMENTS.....13**
 - 7.1 6DB BANDWIDTH.....13
 - 7.2 PEAK POWER.....24
 - 7.3 AVERAGE POWER.....35
 - 7.4 BAND EDGES MEASUREMENT46
 - 7.5 PEAK POWER SPECTRAL DENSITY63
 - 7.6 SPURIOUS EMISSIONS.....78
 - 7.7 POWERLINE CONDUCTED EMISSIONS.....107
- APPENDIX I RADIO FREQUENCY EXPOSURE.....110**
- APPENDIX II PHOTOGRAPHS OF TEST SETUP111**



1. TEST RESULT CERTIFICATION

Applicant: LanReady Technologies Inc.
3F, No.116, Sinhu 2nd Rd., Neihu District,
Taipei City 114, Taiwan (R.O.C.)

Equipment Under Test: 802.11b/g/n USB Dongle

Trade Name / Model: LanReady /WUB1920RS,
AirLink / AWLL6077 V2,
Wavecore / WV-120N,
Cerio / UW-200NU2,
Bluestork / BS-WN-USB/1

Date of Test: August 11 ~ 13, 2009

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Rex Lai
Section Manager
Compliance Certification Services Inc.

Gina Lo
Section Manager
Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	802.11b/g /n USB Dongle			
Trade Name / Model Number	LanReady /WUB1920RS, AirLink / AWLL6077 V2, Wavecore / WV-120N, Cerio / UW-200NU2, Bluestork / BS-WN-USB/1			
Model Discrepancy	All the specification and layout are identical except they come with different model numbers and trade names for marketing purposes.			
Power Supply	Powered by host device.			
Frequency Range	2412 ~ 2462 MHz			
Transmit Power	Mode	Frequency Range	Output Power (dBm)	Output Power (Mw)
	802.11b	2412 - 2462	18.57	71.94490
	802.11g	2412 - 2462	16.47	44.36086
	802.11n Standard-20 MHz	2412 - 2462	16.15	41.20975
	802.11n Standard-40 MHz	2422 - 2452	16.46	44.25884
Modulation Technique	IEEE 802.11b mode: DSSS (1, 2, 5.5 and 11 Mbps) IEEE 802.11g mode: OFDM (6, 9, 12, 18, 24, 36, 48 and 54 Mbps) draft 802.11n Standard-20 MHz Channel mode: OFDM (6.5, 7.2, 13, 14.4, 14.44, 19.5, 21.7, 26, 28.89, 28.9, 39, 43.3, 43.33 52, 57.78, 57.8, 58.5, 65.0, 72.2, 78, 86.67, 104, 115.56, 117, 130, 144.44 Mbps) draft 802.11n Wide-40 MHz Channel mode: OFDM (13.5, 15, 27, 30, 40.5, 45, 54, 60, 81, 90, 108, 120, 121.5, 135, 150, 162, 180, 216, 240, 243, 270, 300 Mbps)			
Number of Channels	IEEE 802.11b/g mode: 11 Channels draft 802.11n Standard-20 MHz Channel mode: 11 Channels draft 802.11n Wide-40 MHz Channel mode: 7 Channels			
Antenna Specification	PCB Antenna / Gain: 3.19dBi			

Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **SCD030013** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4: 2003 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4: 2003.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The EUT (model: WUB1920RS) had been tested under operating condition.

The EUT is a 2x2 configuration spatial MIMO (2Tx & 2Rx) without beam forming function. The 2x2 configuration is implemented with two outside TX & RX chains (Chain 1 and Chain 2).

Software used to control the EUT for staying in continuous transmitting and receiving mode was programmed.

After verification, all tests carried out are with the worst-case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode.

IEEE 802.11b mode:

Channel Low(2412MHz), Channel Mid(2437MHz) and Channel High(2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE 802.11g mode:

Channel Low(2412MHz), Channel Mid(2437MHz) and Channel High(2462MHz) with 6Mbps data rate were chosen for full testing.

draft 802.11n Standard-20 MHz Channel mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

draft 802.11n Wide-40 MHz Channel mode:

Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	02/23/2010

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	10/26/2009
Test Receiver	Rohde&Schwarz	ESCI	100064	11/30/2009
Switch Controller	TRC	Switch Controller	SC94050010	05/02/2010
4 Port Switch	TRC	4 Port Switch	SC94050020	05/02/2010
Loop Antenna	EMCO	6502	8905/2356	05/29/2010
Horn-Antenna	TRC	HA-0502	06	06/03/2010
Horn-Antenna	TRC	HA-0801	04	06/17/2010
Horn-Antenna	TRC	HA-1201A	01	08/09/2010
Horn-Antenna	TRC	HA-1301A	01	08/10/2010
Bilog- Antenna	Sunol Sciences	JB3	A030205	03/28/2010
Turn Table	Max-Full	MFT-120S	T120S940302	N.C.R.
Antenna Tower	Max-Full	MFA-430	A440940302	N.C.R.
Controller	Max-Full	MF-CM886	CC-C-1F-13	N.C.R.
Site NSA	CCS	N/A	FCC: 965860 IC: IC 6106	09/24/2009
Test S/W	LABVIEW (V 6.1)			

Powerline Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI TEST RECEIVER 9kHz-30MHz	ROHDE & SCHWARZ	ESHS30	828144/003	11/18/2009
TWO-LINE V-NETWORK 9kHz-30MHz	SCHAFFNER	NNB41	03/10013	06/10/2010
LISN 10kHz-100MHz	EMCO	3825/2	9106-1809	04/08/2010
Test S/W	LABVIEW (V 6.1)			



4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 2.81
3M Semi Anechoic Chamber / 30MHz ~ 1GHz	+/-3.7046
3M Semi Anechoic Chamber / Above 1GHz	+/-3.0958

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.




Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	 Testing Laboratory 1309
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	Notebook PC	DELL	PP19L	GK102 A00	QDS-BRCM1021	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
2.	Notebook PC	IBM	2672 (X31)	9985H9M	WLAN: ANO20030400LEG Bluetooth: ANO20020100MTN	LAN Cable: Unshielded, 10m Line Cable: Unshielded, 10m	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
3.	LCD Monitor	Samsung	173P	D117H4JXB04968Y	FCC DoC	Shielded, 1.8m with 2 cores	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
4.	USB 2.0 External HDD	TeraSyS	F12-UF(COMBO)	A0100215-42O014	FCC DoC	Shielded, 1.8m	N/A
5.	USB Mouse	HP	MO19UCA	20440964	FCC DoC	Shielded, 1.8m	N/A

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.


7. FCC PART 15.247 REQUIREMENTS

7.1 6dB BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Configuration

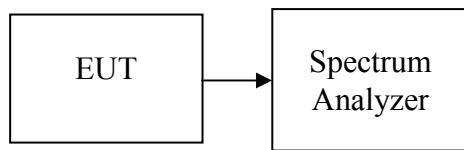

TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100 kHz, VBW = 100 kHz , Span = 50 MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted

**Test Data****Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	9.67	>500	PASS
Mid	2437	9.58		PASS
High	2462	9.92		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.58	>500	PASS
Mid	2437	16.50		PASS
High	2462	16.50		PASS

Test mode: draft 802.11n Standard-20 MHz Channel mode / Chain 1

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.83	>500	PASS
Mid	2437	17.83		PASS
High	2462	17.83		PASS

Test mode: draft 802.11n Standard-20 MHz Channel mode / Chain 2

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.58	>500	PASS
Mid	2437	17.67		PASS
High	2462	17.75		PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode / Chain 1

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	36.40	>500	PASS
Mid	2437	36.52		PASS
High	2452	36.52		PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode / Chain 2


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	36.40	>500	PASS
Mid	2437	36.40		PASS
High	2452	36.40		PASS




Test Plot

IEEE 802.11b mode

6dB Bandwidth (CH Low)

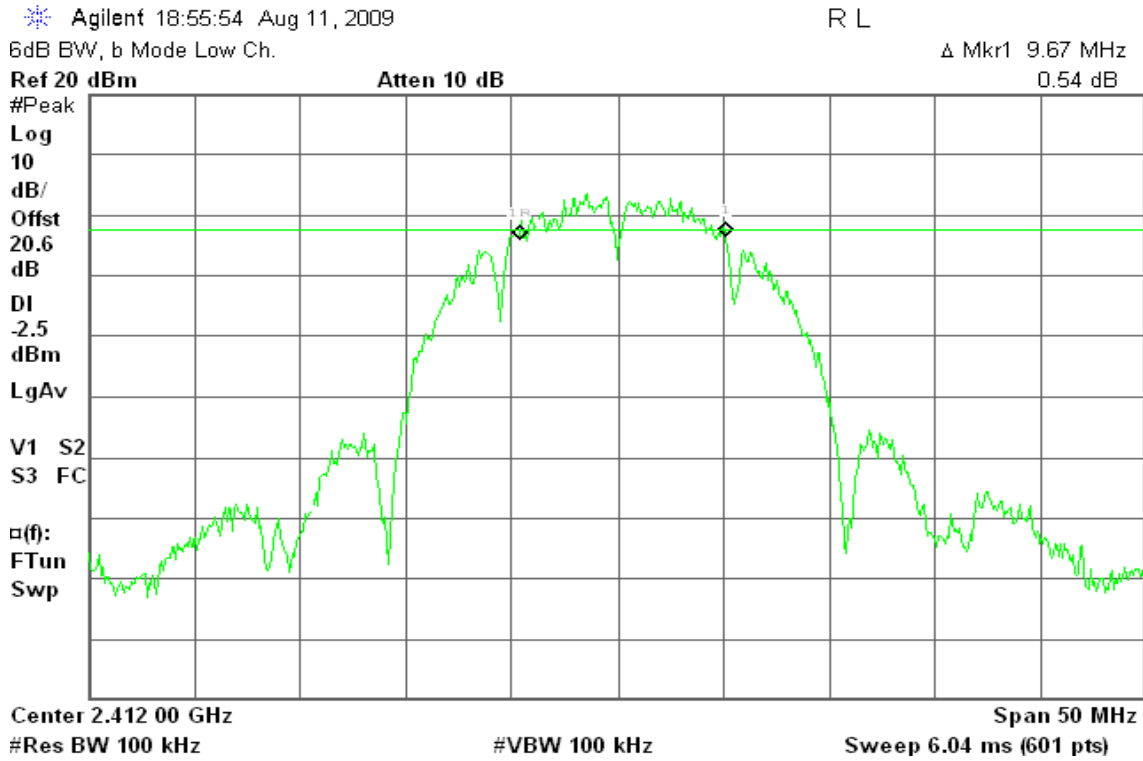

6dB Bandwidth (CH Mid)

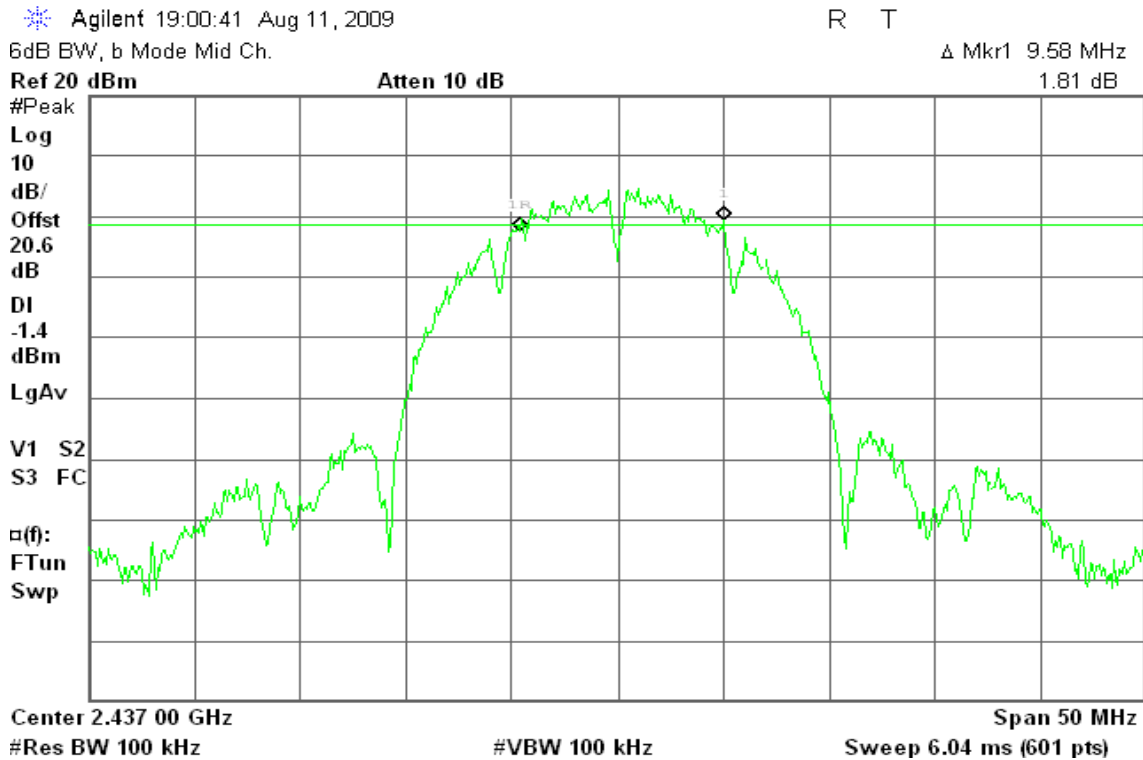



6dB Bandwidth (CH High)

Agilent 19:05:25 Aug 11, 2009

R T

6dB BW, b Mode High Ch.

Δ Mkr1 9.92 MHz

Ref 20 dBm

Atten 10 dB

-1.06 dB

#Peak

Log

10

dB/

Offst

20.6

dB

DI

-1.9

dBm

LgAv


V1 S2

S3 FC

□(f):

FTun

Swp

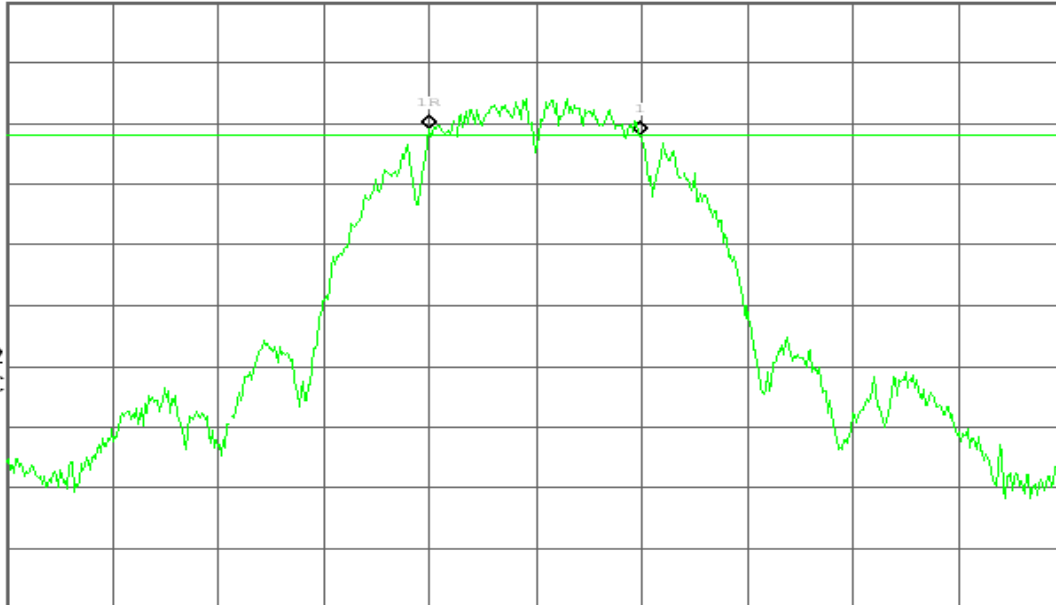

Center 2.462 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

IEEE 802.11g mode

6dB Bandwidth (CH Low)

Agilent 19:43:41 Aug 11, 2009

R T

6dB BW, g Mode Low Ch.

Δ Mkr1 16.58 MHz

Ref 20 dBm

Atten 10 dB

1.55 dB

#Peak

Log

10

dB/

Offst

20.6

dB

DI

-11.7

dBm

LgAv


V1 S2

S3 FC

□(f):

FTun

Swp

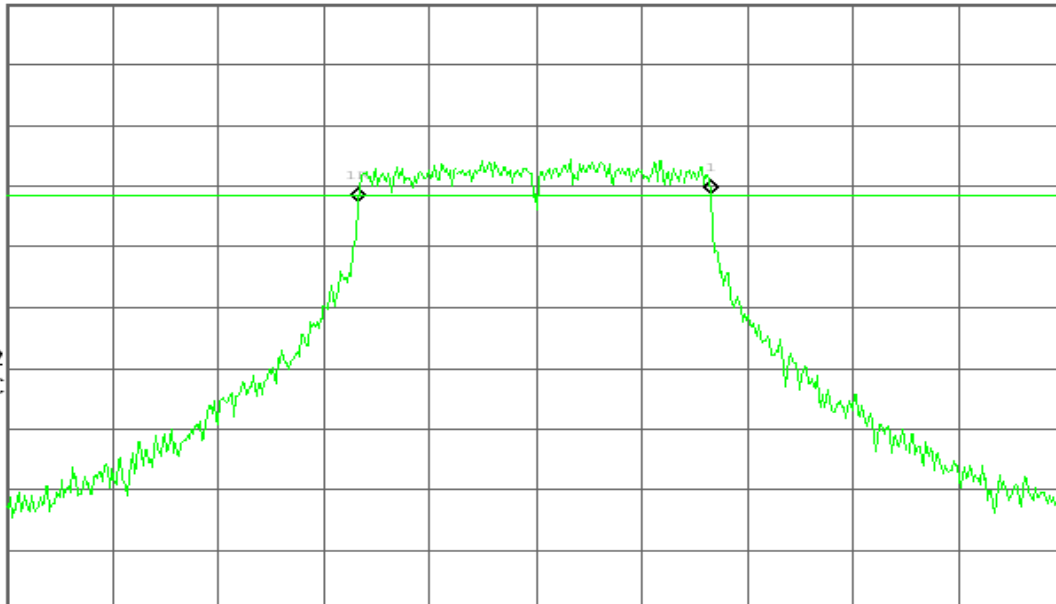

Center 2.412 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)



6dB Bandwidth (CH Mid)

Agilent 20:02:35 Aug 11, 2009

R T


6dB BW, g Mode Mid Ch.

Δ Mkr1 16.50 MHz

Ref 20 dBm

Atten 10 dB

-0.13 dB

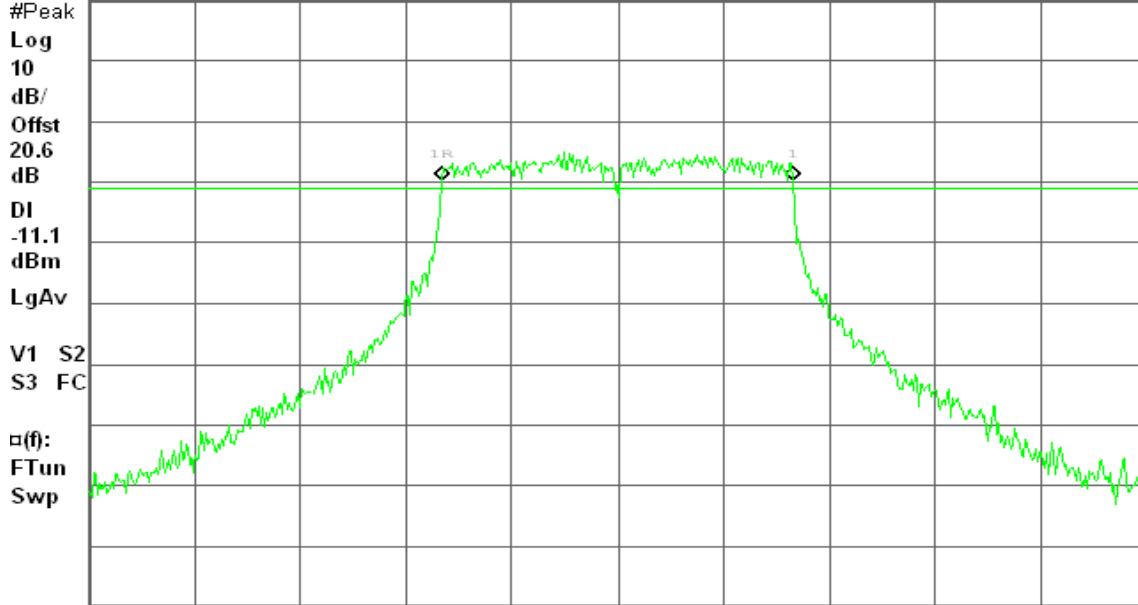

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH High)

Agilent 20:10:34 Aug 11, 2009

R T


6dB BW, g Mode High Ch.

Δ Mkr1 16.50 MHz

Ref 20 dBm

Atten 10 dB

-0.12 dB

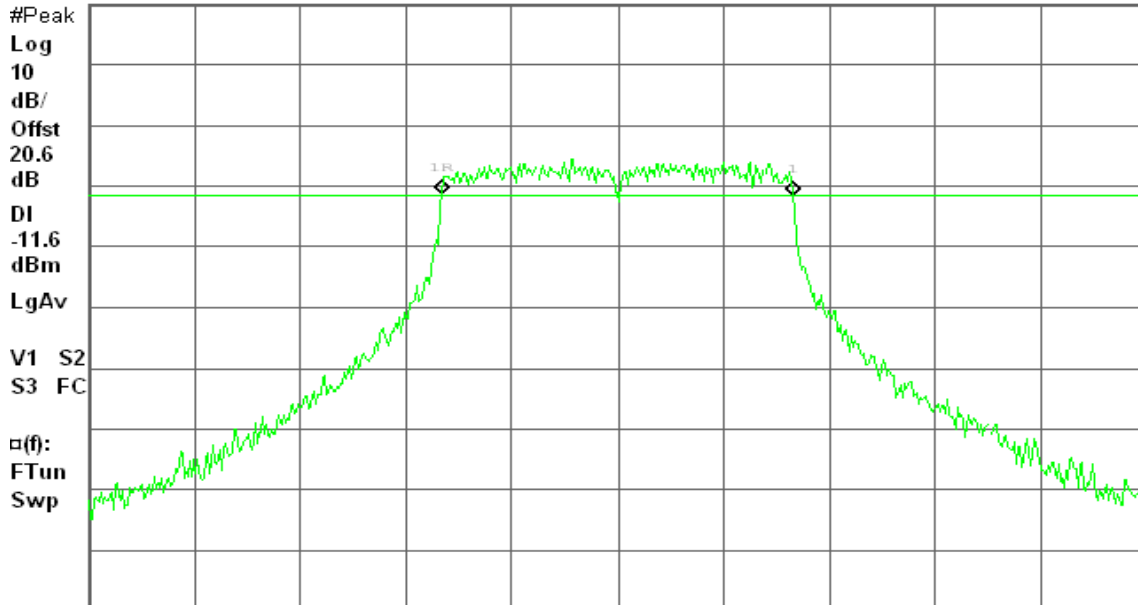

Center 2.462 00 GHz

Span 50 MHz

#Res BW 100 kHz


#VBW 100 kHz

Sweep 6.04 ms (601 pts)




draft 802.11n Standard-20 MHz Channel mode / Chain 1

6dB Bandwidth (CH Low)

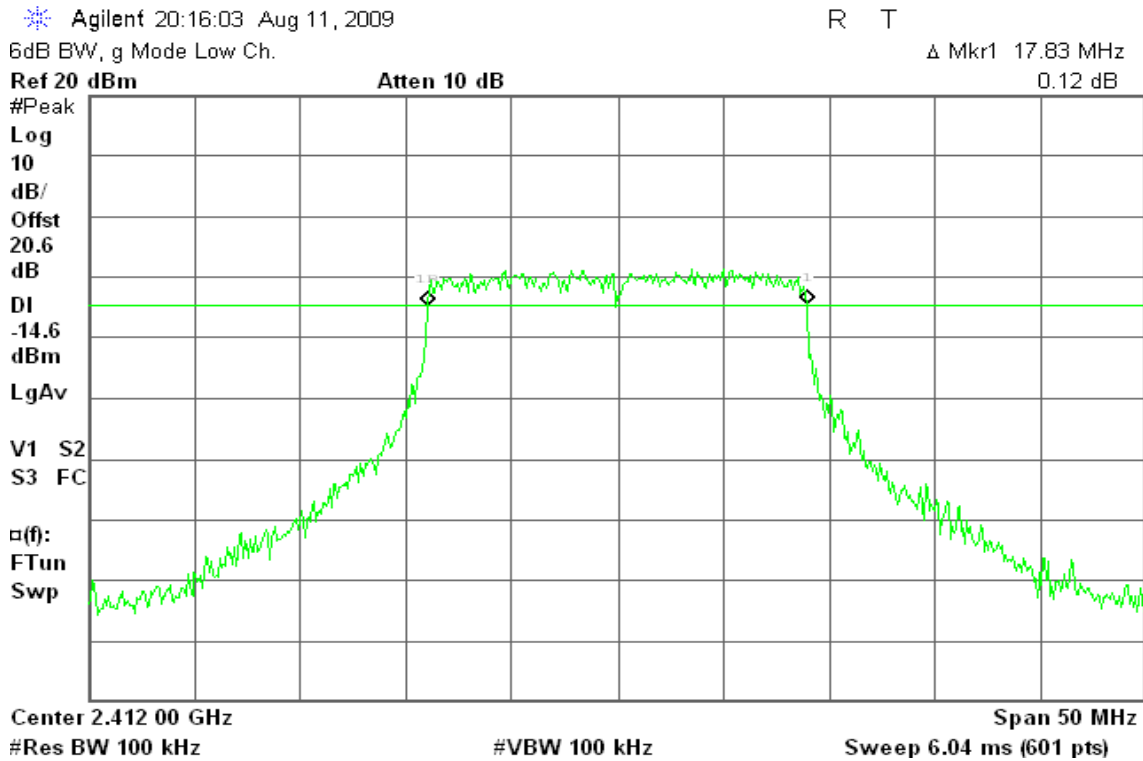

6dB Bandwidth (CH Mid)

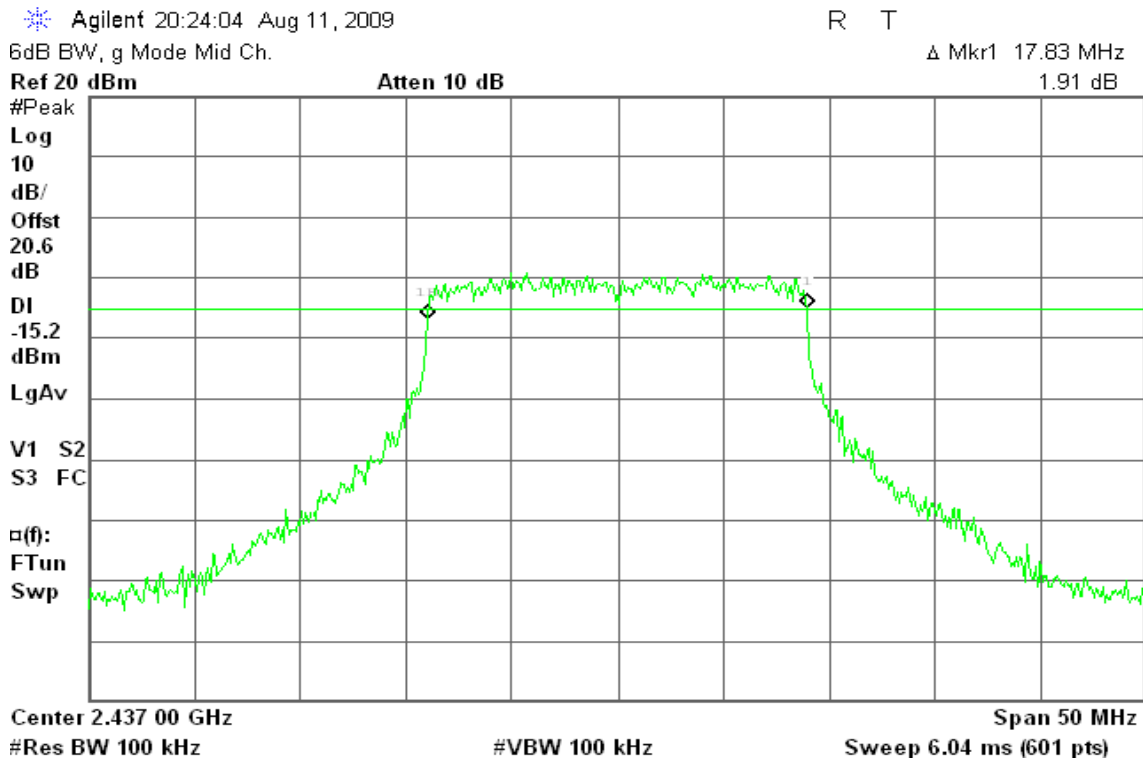



6dB Bandwidth (CH High)

Agilent 20:30:47 Aug 11, 2009

R T

6dB BW, g Mode High Ch.

Δ Mkr1 17.83 MHz

Ref 20 dBm

Atten 10 dB

-0.55 dB

#Peak

Log

10

dB/

Offst

20.6

dB

DI

-14.8

dBm

LgAv


V1 S2

S3 FC

□(f):

FTun

Swp

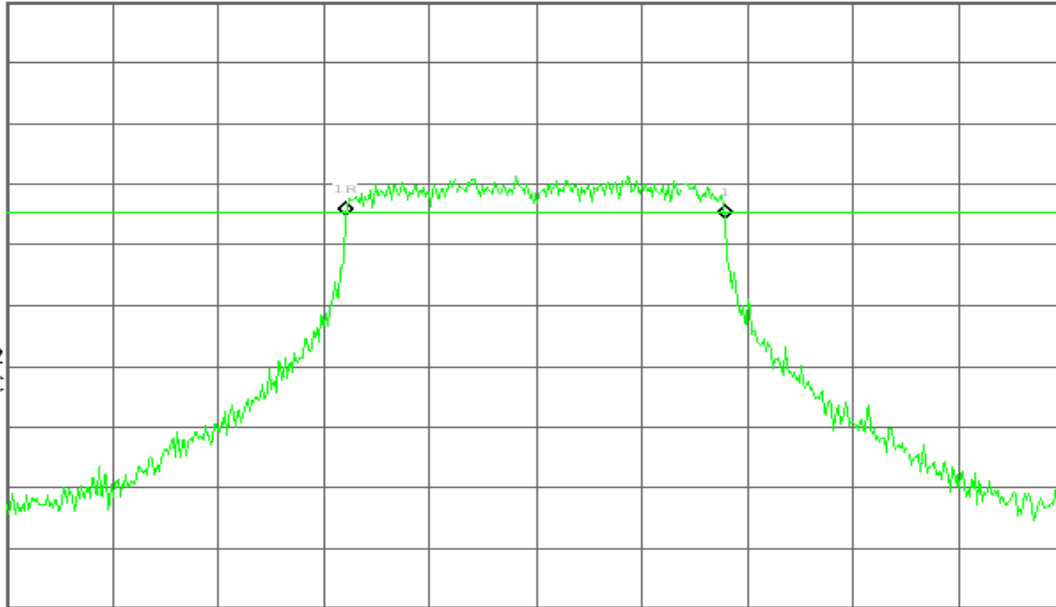

Center 2.462 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

draft 802.11n Standard-20 MHz Channel mode / Chain 2

6dB Bandwidth (CH Low)

Agilent 21:41:10 Aug 11, 2009

R T

6dB BW, g Mode Low Ch.

Δ Mkr1 17.58 MHz

Ref 20 dBm

Atten 10 dB

-1.08 dB

#Peak

Log

10

dB/

Offst

20.6

dB

DI

-15.0

dBm

LgAv


V1 S2

S3 FC

□(f):

FTun

Swp

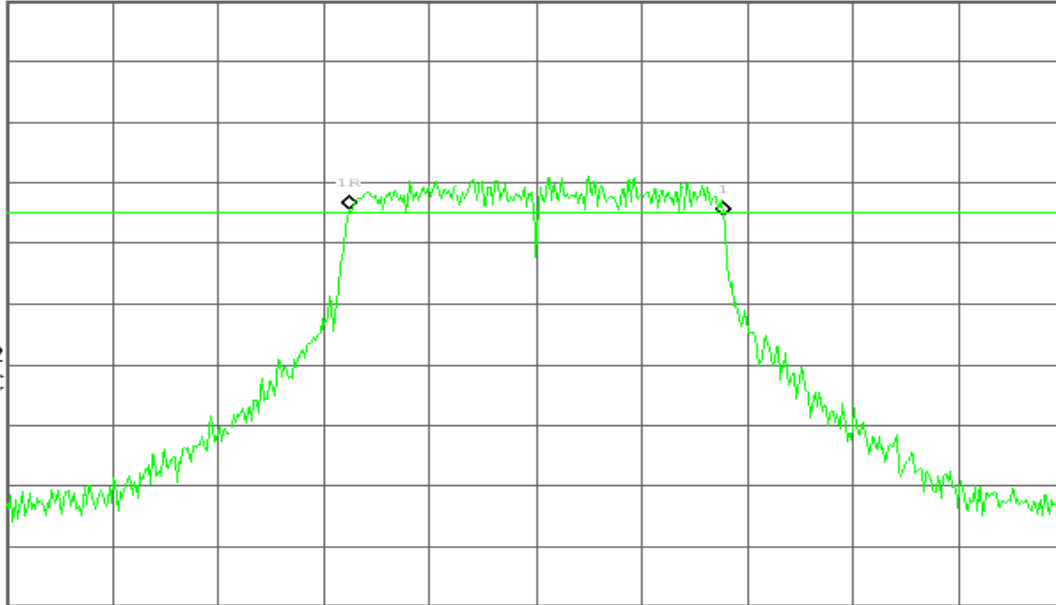

Center 2.412 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)



6dB Bandwidth (CH Mid)

Agilent 21:45:12 Aug 11, 2009

R T


6dB BW, g Mode Mid Ch.

Δ Mkr1 17.67 MHz

Ref 20 dBm

Atten 10 dB

-1.52 dB

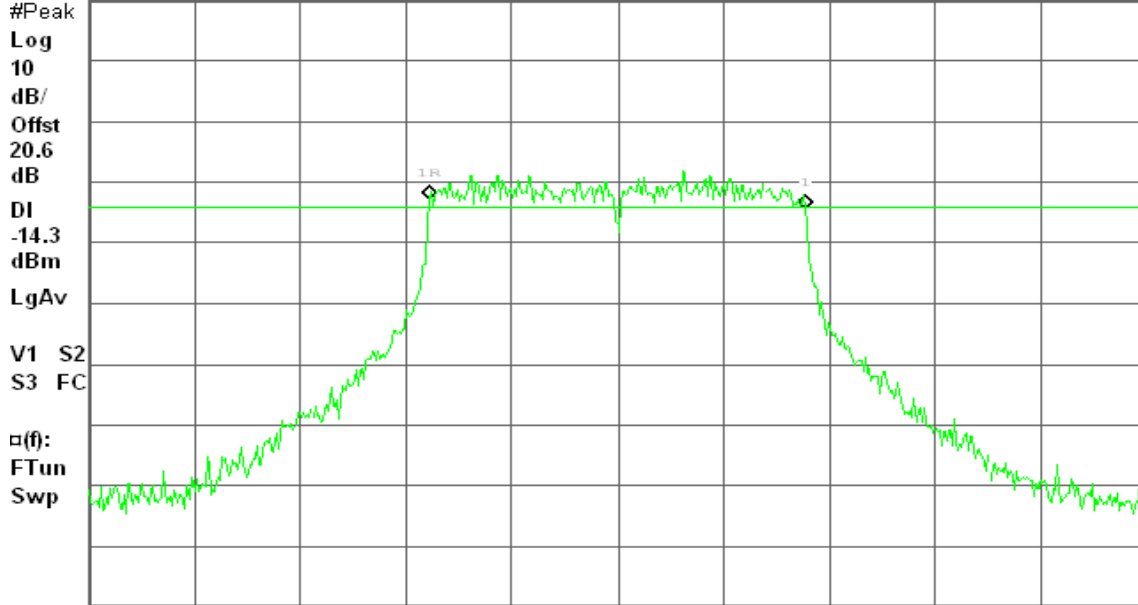

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH High)

Agilent 21:53:52 Aug 11, 2009

R L


6dB BW, g Mode High Ch.

Δ Mkr1 17.75 MHz

Ref 20 dBm

Atten 10 dB

1.78 dB

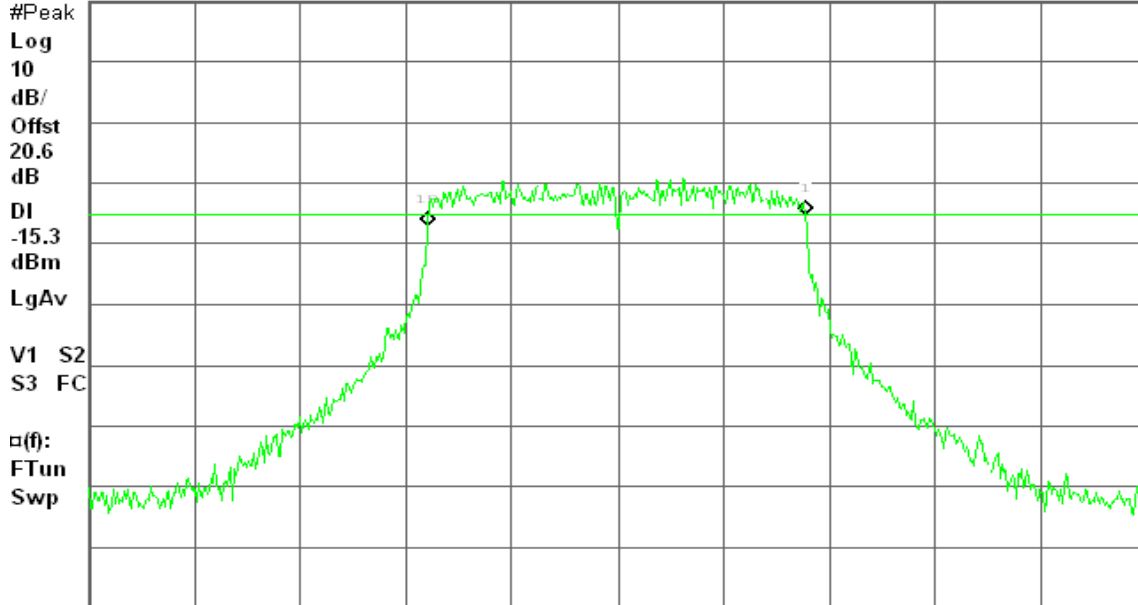

Center 2.462 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)



draft 802.11n Wide-40 MHz Channel mode / Chain 1

6dB Bandwidth (CH Low)

Agilent 20:44:16 Aug 11, 2009

R T


6dB BW, g Mode Low Ch.

Δ Mkr1 36.40 MHz

Ref 20 dBm

Atten 10 dB

1.36 dB

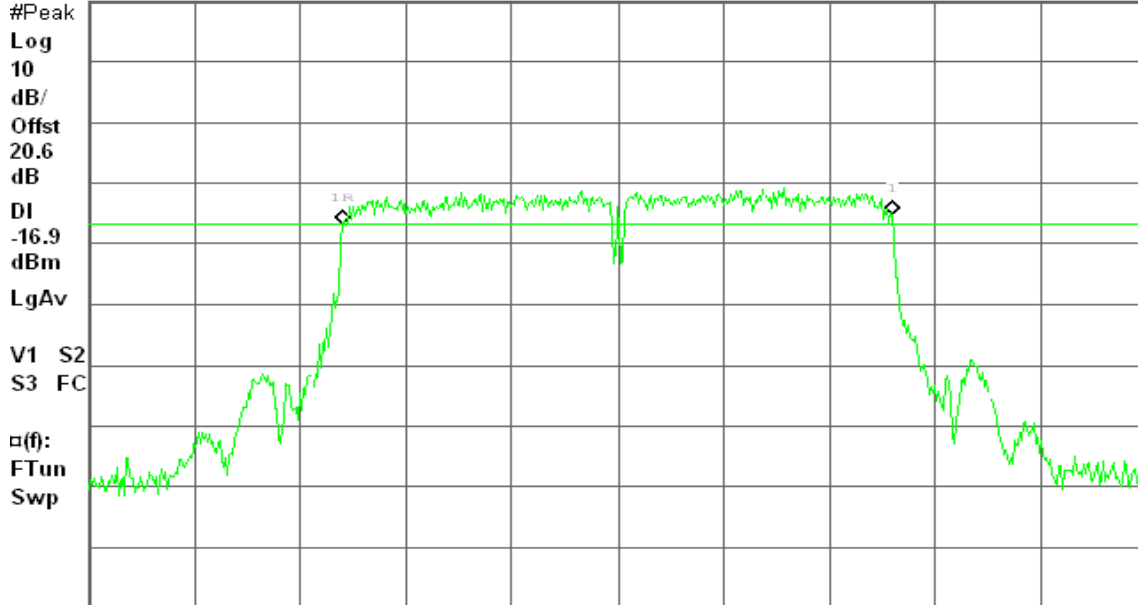

Center 2.422 00 GHz

Span 70 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 8.44 ms (601 pts)

6dB Bandwidth (CH Mid)

Agilent 20:48:03 Aug 11, 2009

R T


6dB BW, g Mode Mid Ch.

Δ Mkr1 36.52 MHz

Ref 20 dBm

Atten 10 dB

-2.20 dB

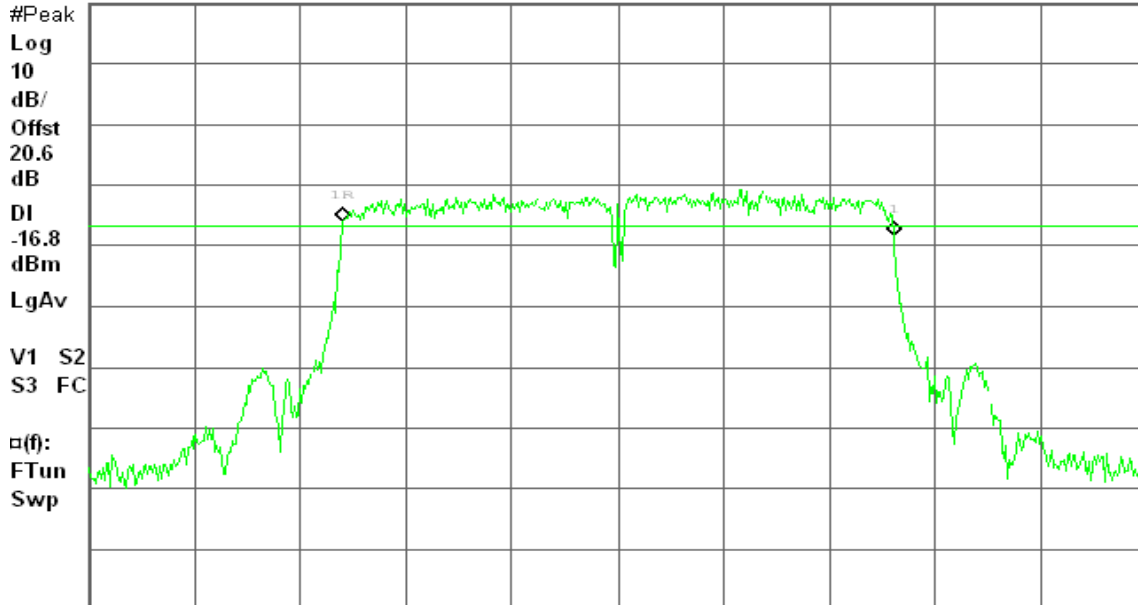

Center 2.437 00 GHz

Span 70 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 8.44 ms (601 pts)



6dB Bandwidth (CH High)

Agilent 20:52:28 Aug 11, 2009

R T


6dB BW, g Mode High Ch.

Δ Mkr1 36.52 MHz

Ref 20 dBm

Atten 10 dB

-1.48 dB

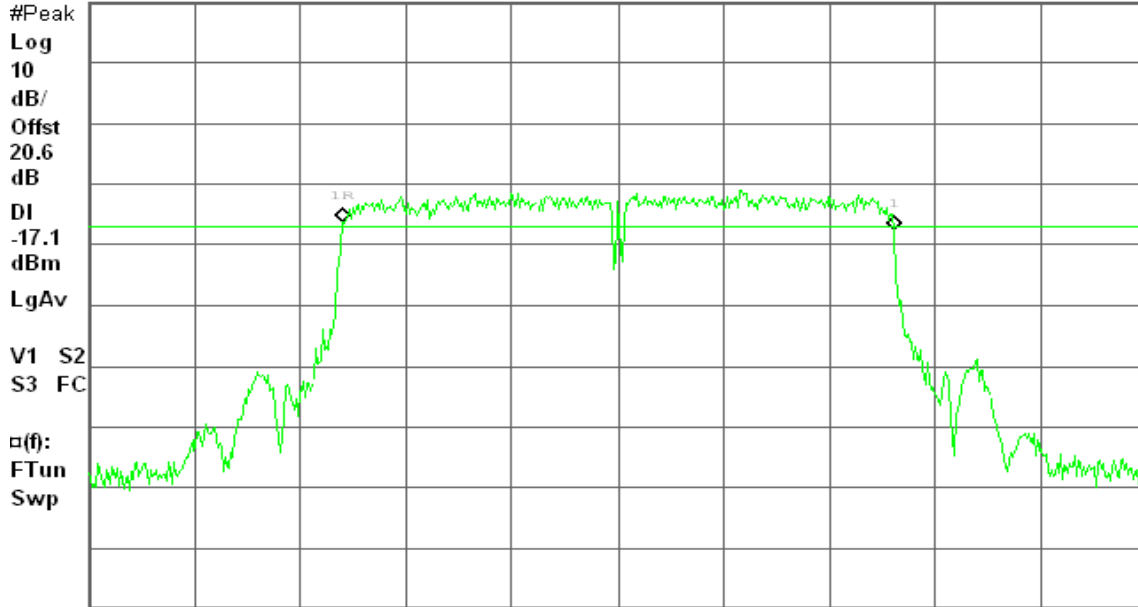

Center 2.452 00 GHz

Span 70 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 8.44 ms (601 pts)

draft 802.11n Wide-40 MHz Channel mode / Chain 2

6dB Bandwidth (CH Low)

Agilent 21:15:48 Aug 11, 2009

R T


6dB BW, g Mode Low Ch.

Δ Mkr1 36.40 MHz

Ref 20 dBm

Atten 10 dB

-0.88 dB

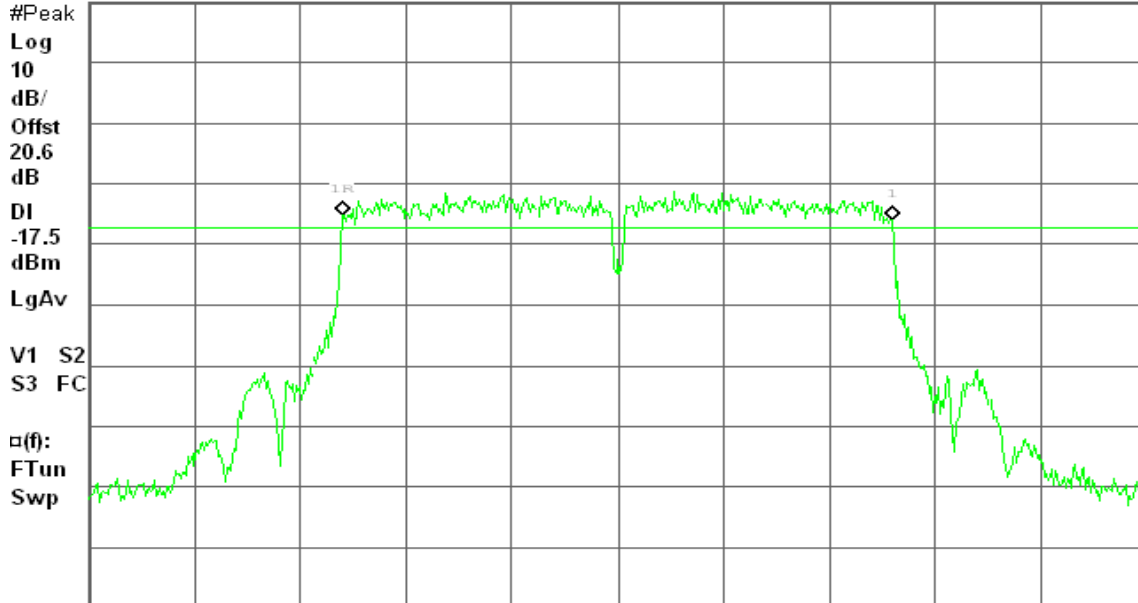

Center 2.422 00 GHz

Span 70 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 8.44 ms (601 pts)



6dB Bandwidth (CH Mid)

Agilent 21:19:43 Aug 11, 2009

R T


6dB BW, g Mode Mid Ch.

Δ Mkr1 36.40 MHz

Ref 20 dBm

Atten 10 dB

0.04 dB

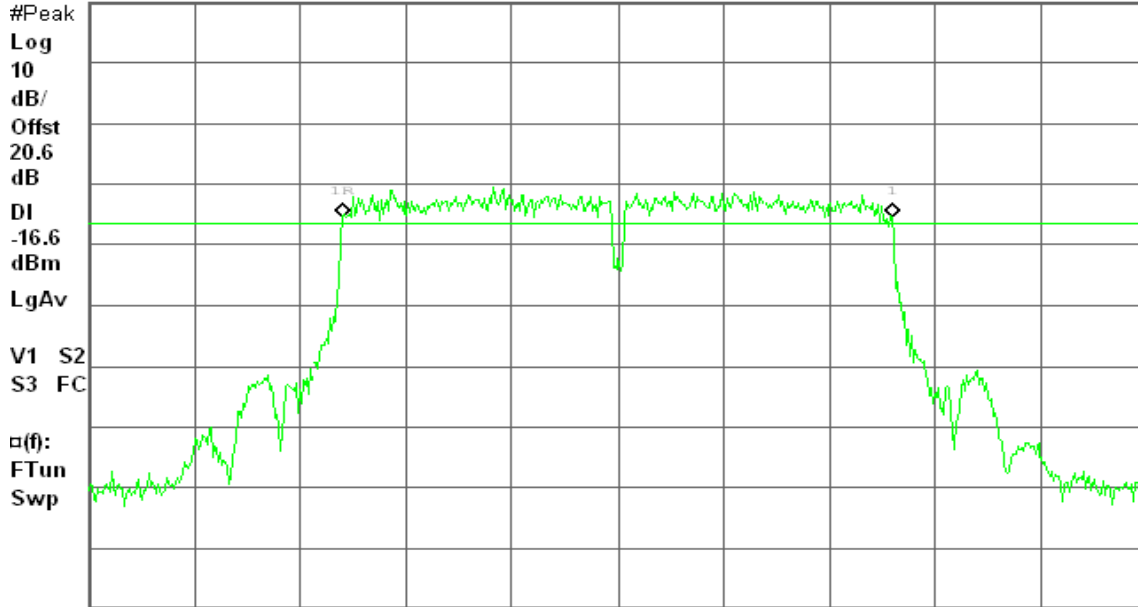

Center 2.437 00 GHz

Span 70 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 8.44 ms (601 pts)

6dB Bandwidth (CH High)

Agilent 20:57:33 Aug 11, 2009

R T


6dB BW, g Mode High Ch.

Δ Mkr1 36.40 MHz

Ref 20 dBm

Atten 10 dB

-0.28 dB

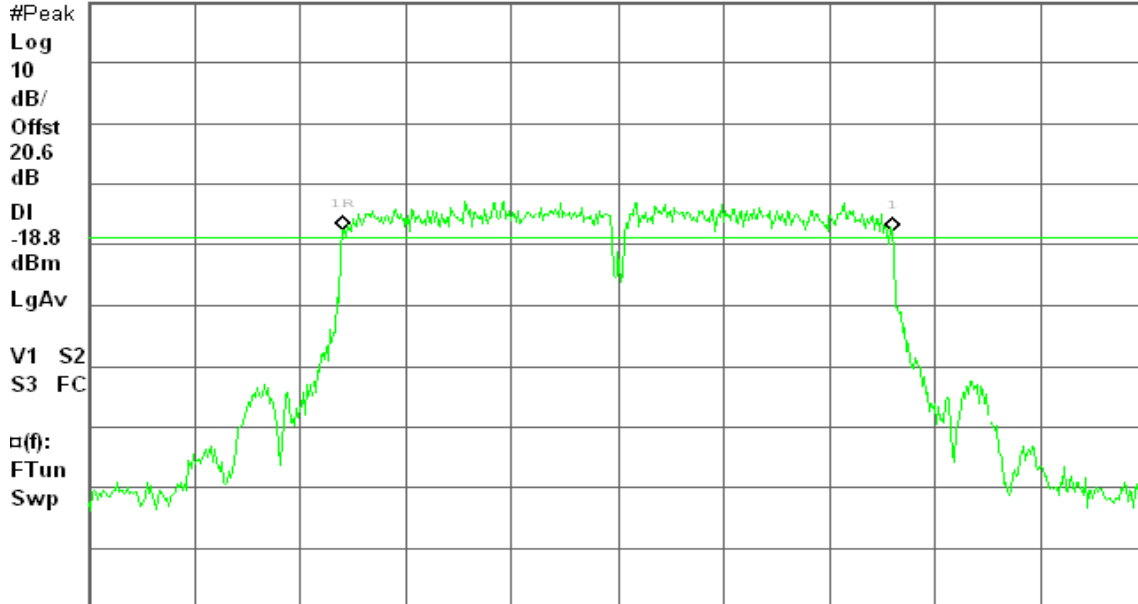

Center 2.452 00 GHz

Span 70 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 8.44 ms (601 pts)




7.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration



TEST PROCEDURE

1. Peak power is measured using the spectrum analyzer's internal channel power integration function.
2. Power is integrated over a bandwidth greater than or equal to the 99% bandwidth.

TEST RESULTS

No non-compliance noted.



Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	18.06	0.06397	1.00	PASS
Mid	2437	18.57	0.07194		PASS
High	2462	18.04	0.06368		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	16.47	0.04436	1.00	PASS
Mid	2437	16.39	0.04355		PASS
High	2462	16.22	0.04188		PASS

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	Chain 1 Output Power (dBm)	Chain 2 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	13.06	13.22	16.15	0.0412	1.00	PASS
Mid	2437	13.41	12.85	16.15	0.0412		PASS
High	2462	13.41	12.57	16.02	0.0400		PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode

Channel	Frequency (MHz)	Chain 1 Output Power (dBm)	Chain 2 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2422	13.88	12.75	16.36	0.0433	1.00	PASS
Mid	2437	13.80	13.06	16.46	0.0442		PASS
High	2452	14.12	11.78	16.12	0.0409		PASS

Remark: Total Output Power (w) = Chain 1 (10^(Output Power /10)/1000) + Chain 2 (10^(Output Power /10)/1000)




Test Plot

IEEE 802.11b mode

Peak Power (CH Low)

Agilent 17:23:07 Aug 11, 2009


R T

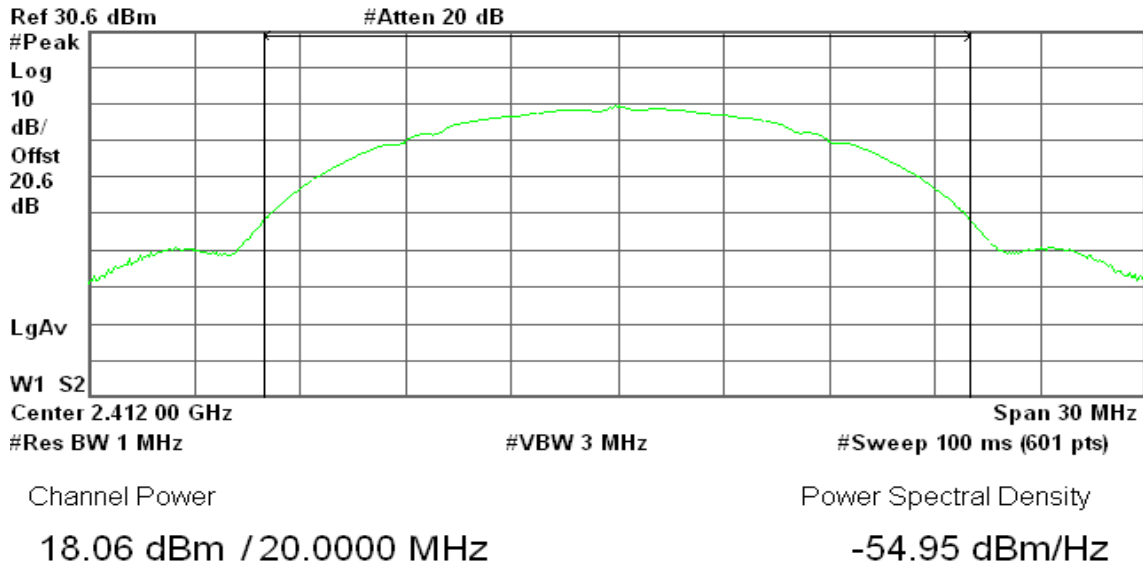

Peak Power (CH Mid)

Agilent 17:26:39 Aug 11, 2009

R T

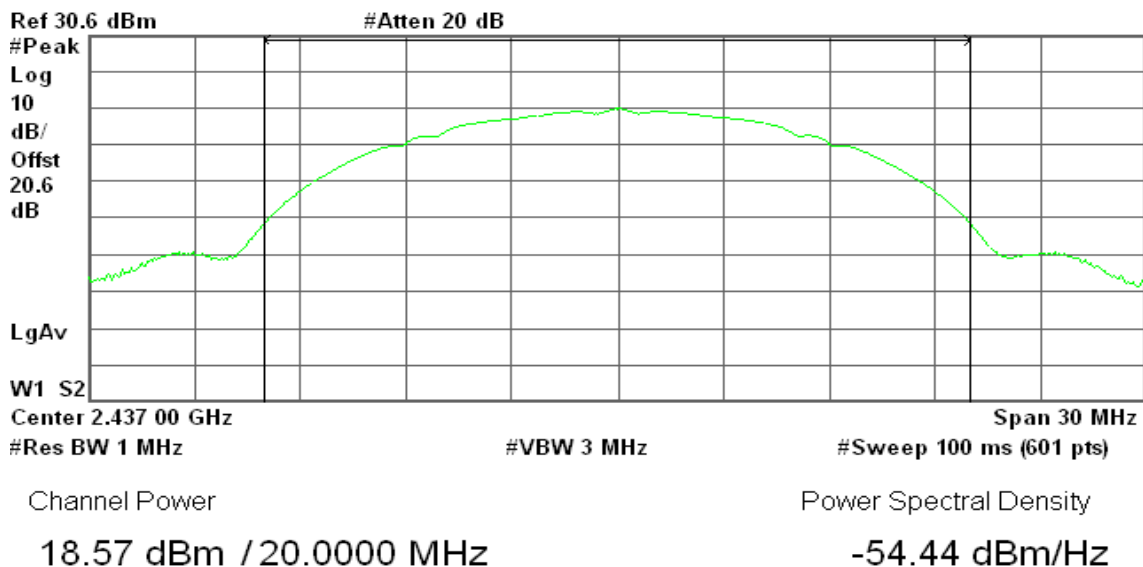




Peak Power (CH High)

Agilent 17:28:01 Aug 11, 2009

R T

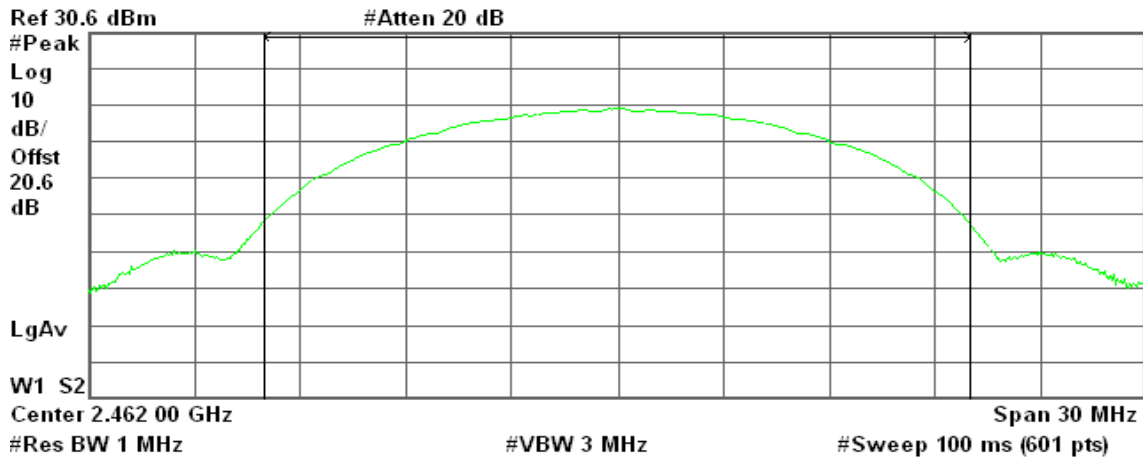

Channel Power

18.04 dBm / 20.0000 MHz

Power Spectral Density


-54.97 dBm/Hz

IEEE 802.11g mode

Peak Power (CH Low)

Agilent 17:32:13 Aug 11, 2009

R T

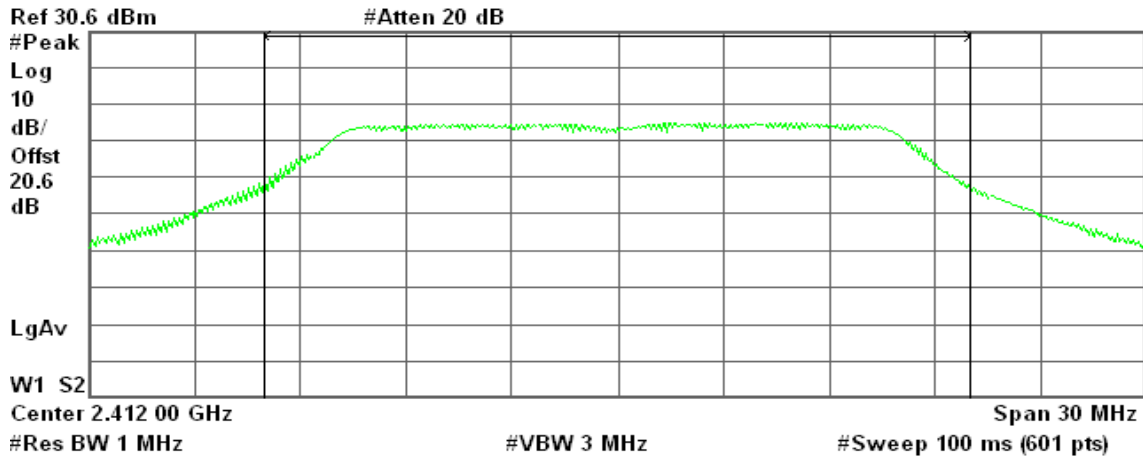

Channel Power

16.47 dBm / 20.0000 MHz

Power Spectral Density


-56.54 dBm/Hz



Peak Power (CH Mid)

Agilent 17:31:14 Aug 11, 2009

R T

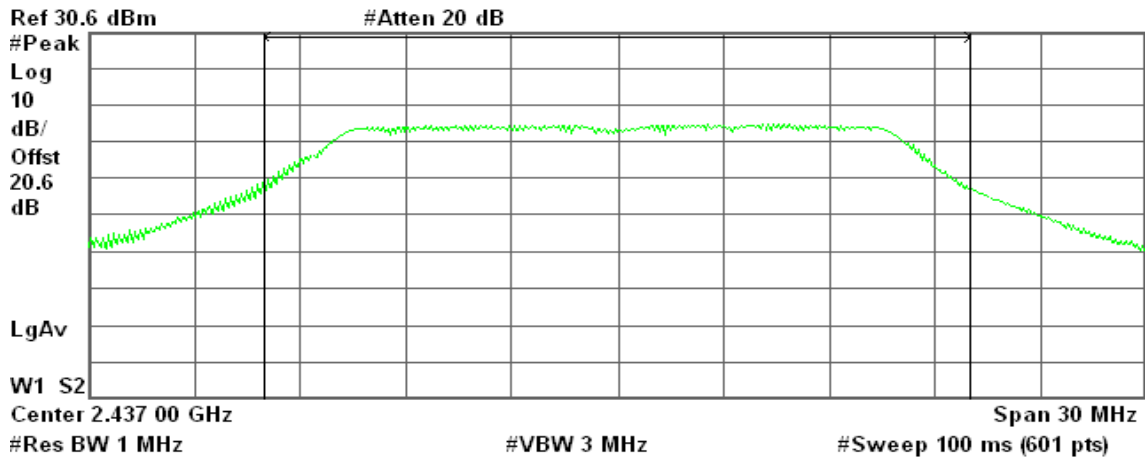

Channel Power

16.39 dBm / 20.0000 MHz


Power Spectral Density

-56.62 dBm/Hz

Peak Power (CH High)

Agilent 17:29:45 Aug 11, 2009

R T

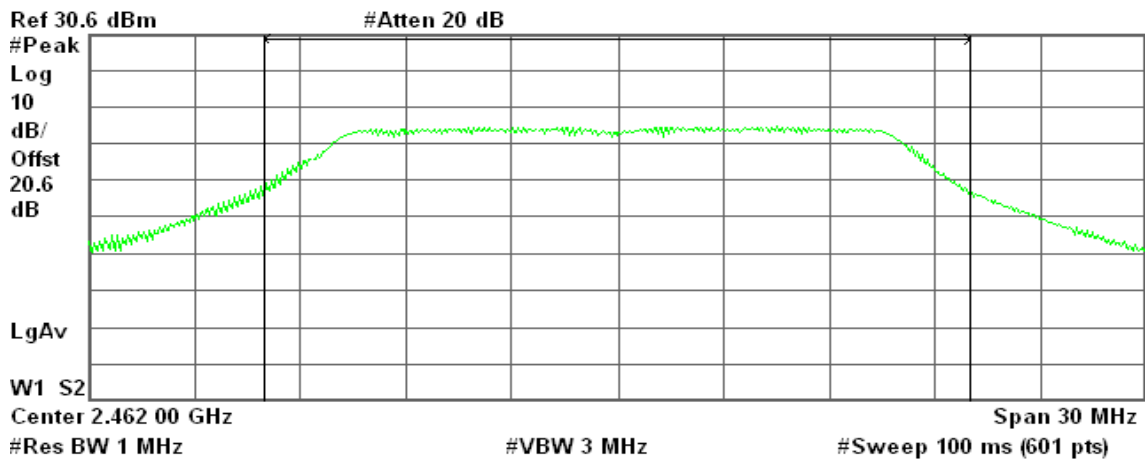

Channel Power

16.22 dBm / 20.0000 MHz

Power Spectral Density

-56.79 dBm/Hz




draft 802.11n Standard-20 MHz Channel mode / Chain 1

Peak Power (CH Low)

Agilent 17:37:41 Aug 11, 2009

R T

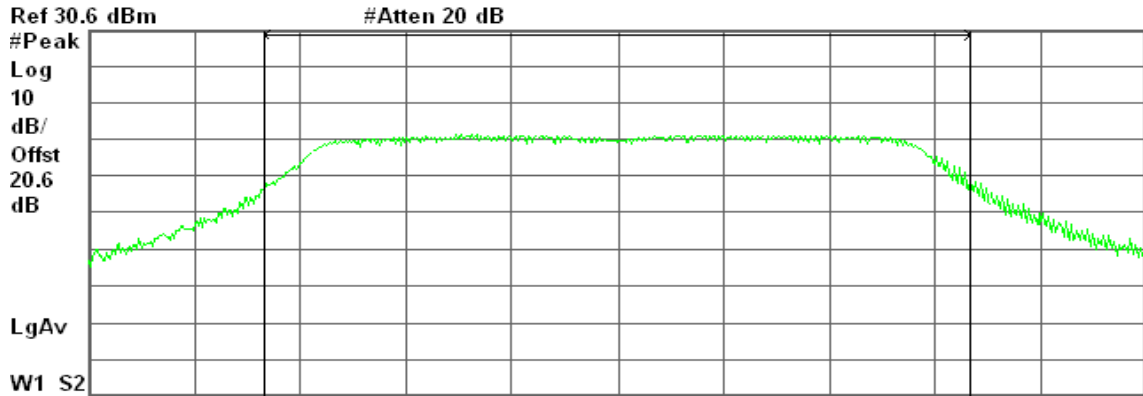

Center 2.412 00 GHz Span 30 MHz
 #Res BW 1 MHz #VBW 3 MHz #Sweep 100 ms (601 pts)

Channel Power

Power Spectral Density


13.06 dBm / 20.0000 MHz

-59.95 dBm/Hz

Peak Power (CH Mid)

Agilent 17:38:49 Aug 11, 2009

R T

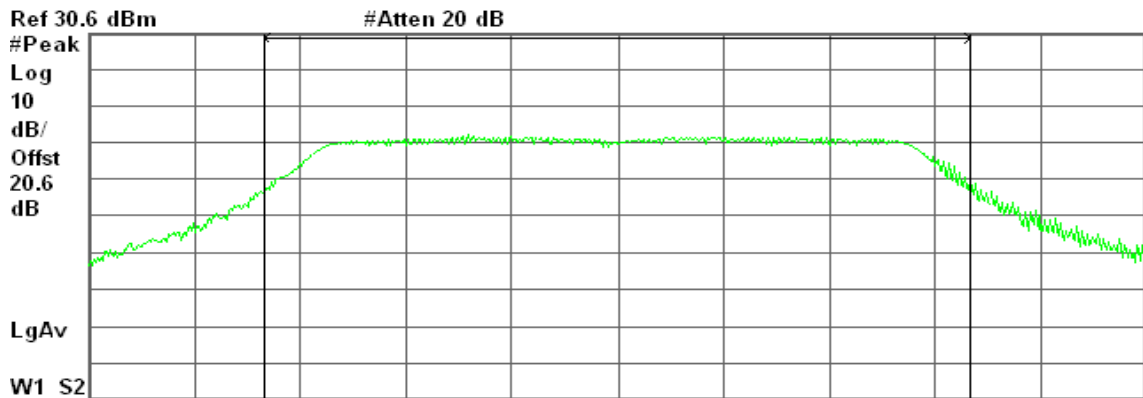

Center 2.437 00 GHz Span 30 MHz
 #Res BW 1 MHz #VBW 3 MHz #Sweep 100 ms (601 pts)

Channel Power

Power Spectral Density

13.41 dBm / 20.0000 MHz


-59.60 dBm/Hz



Peak Power (CH High)

Agilent 17:40:26 Aug 11, 2009

R T

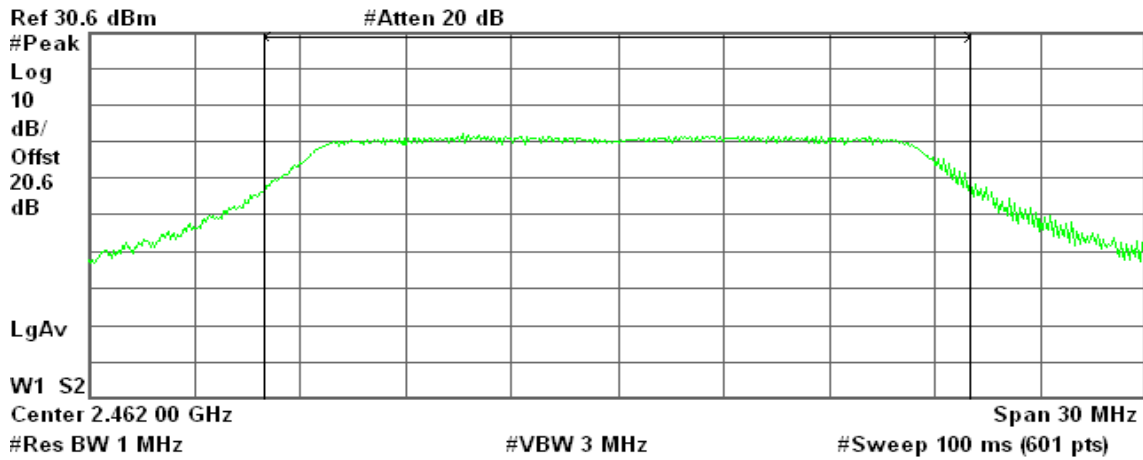

Channel Power

13.41 dBm / 20.0000 MHz

Power Spectral Density


-59.60 dBm/Hz

draft 802.11n Standard-20 MHz Channel mode / Chain 2

Peak Power (CH Low)

Agilent 18:34:25 Aug 11, 2009

R T

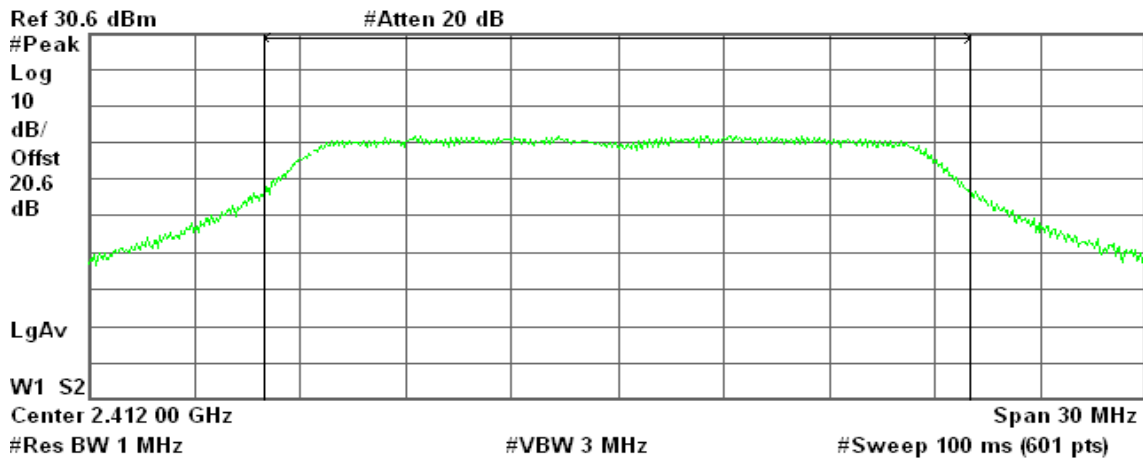

Channel Power

13.22 dBm / 20.0000 MHz

Power Spectral Density


-59.79 dBm/Hz



Peak Power (CH Mid)

Agilent 18:35:56 Aug 11, 2009

R T

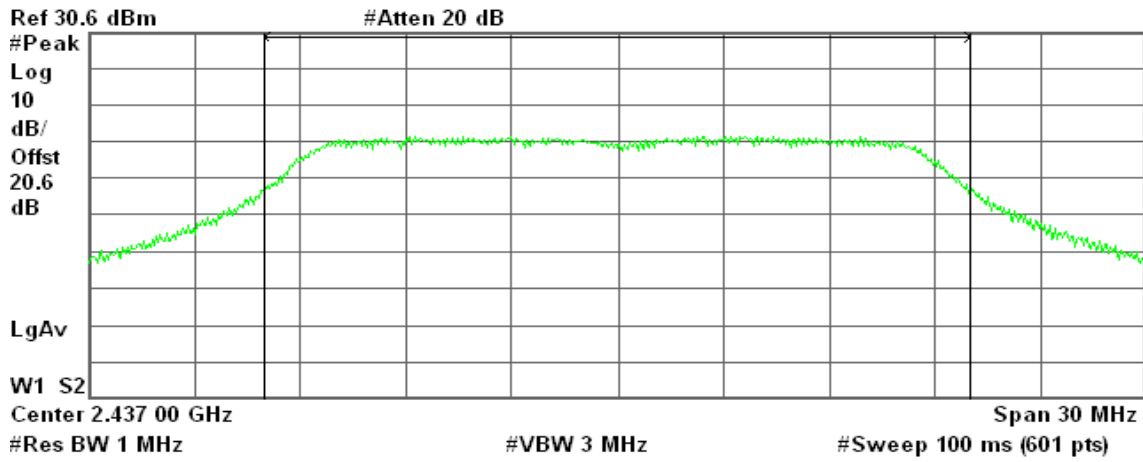

Channel Power

12.85 dBm / 20.0000 MHz


Power Spectral Density

-60.16 dBm/Hz

Peak Power (CH High)

Agilent 18:36:59 Aug 11, 2009

R T

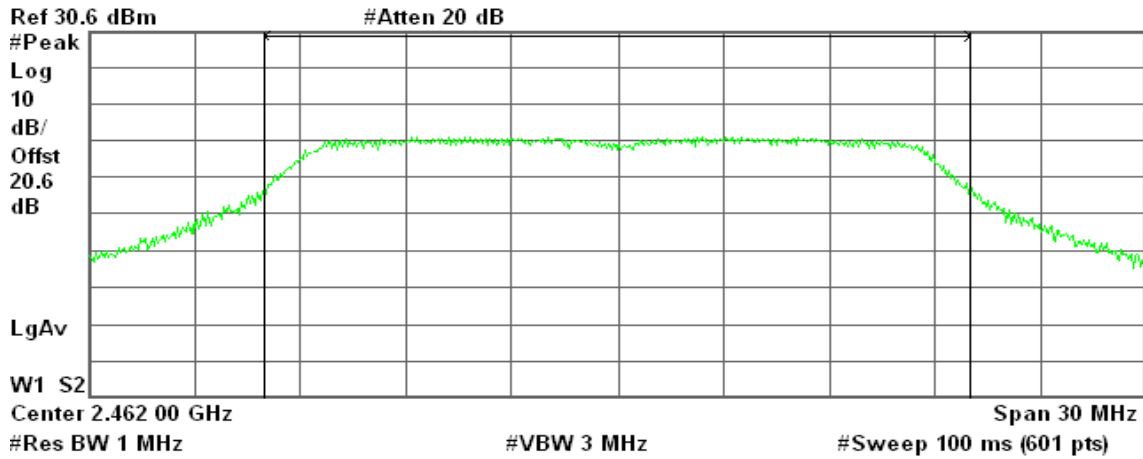

Channel Power

12.57 dBm / 20.0000 MHz

Power Spectral Density

-60.44 dBm/Hz




draft 802.11n Wide-40 MHz Channel mode / Chain 1

Peak Power (CH Low)

Agilent 18:27:44 Aug 11, 2009

R T

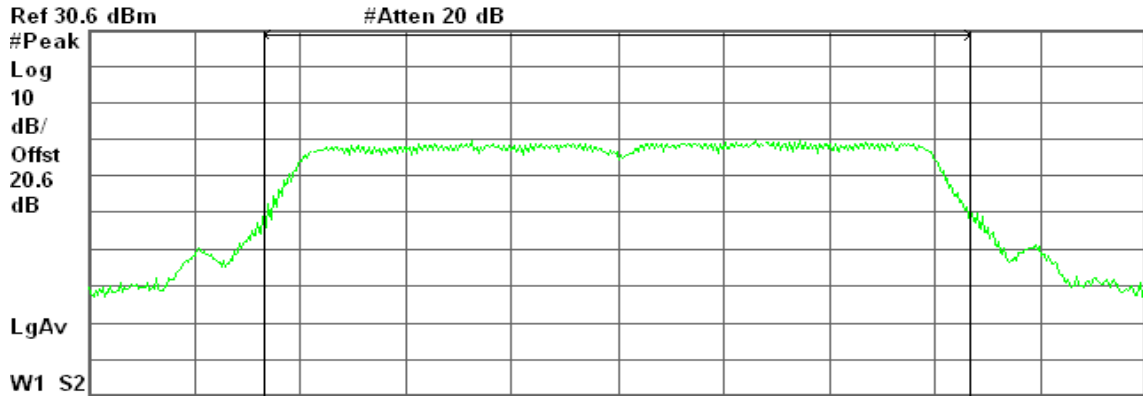

Center 2.422 00 GHz Span 60 MHz
 #Res BW 1 MHz #VBW 3 MHz #Sweep 100 ms (601 pts)

Channel Power

Power Spectral Density


13.88 dBm / 40.0000 MHz

-62.14 dBm/Hz

Peak Power (CH Mid)

Agilent 18:25:54 Aug 11, 2009

R T

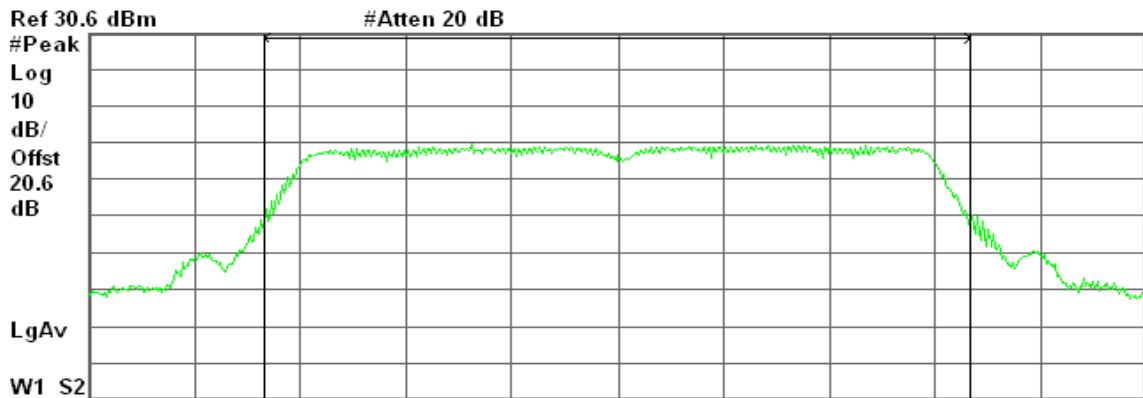

Center 2.437 00 GHz Span 60 MHz
 #Res BW 1 MHz #VBW 3 MHz #Sweep 100 ms (601 pts)

Channel Power

Power Spectral Density

13.80 dBm / 40.0000 MHz


-62.22 dBm/Hz



Peak Power (CH High)

Agilent 18:21:11 Aug 11, 2009

R T

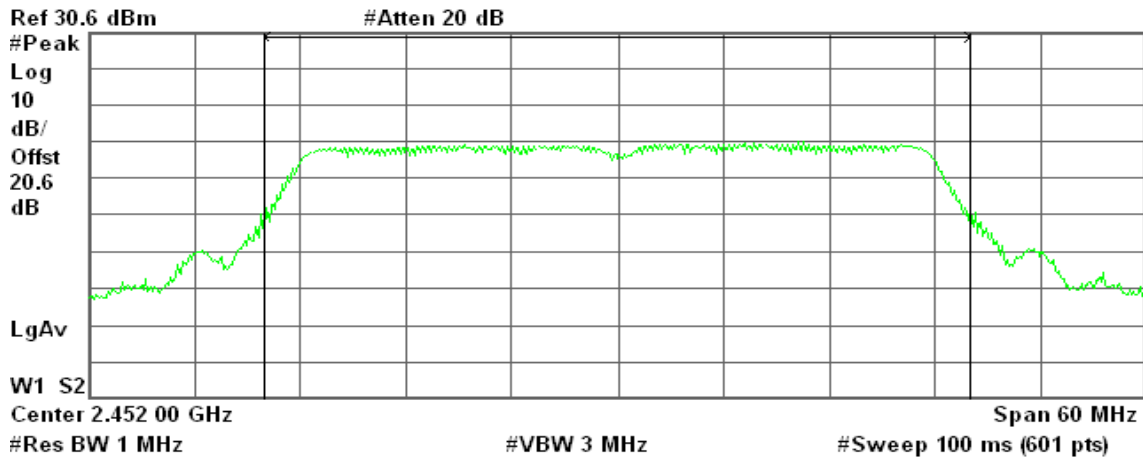

Channel Power

14.12 dBm / 40.0000 MHz

Power Spectral Density


-61.90 dBm/Hz

draft 802.11n Wide-40 MHz Channel mode / Chain 2

Peak Power (CH Low)

Agilent 18:28:33 Aug 11, 2009

R T

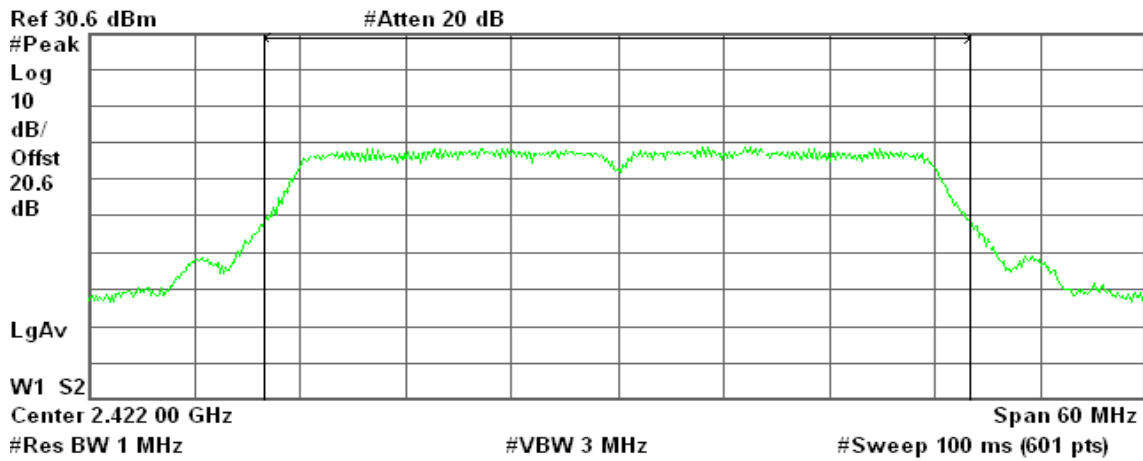

Channel Power

12.75 dBm / 40.0000 MHz

Power Spectral Density


-63.27 dBm/Hz



Peak Power (CH Mid)

Agilent 18:26:42 Aug 11, 2009

R T

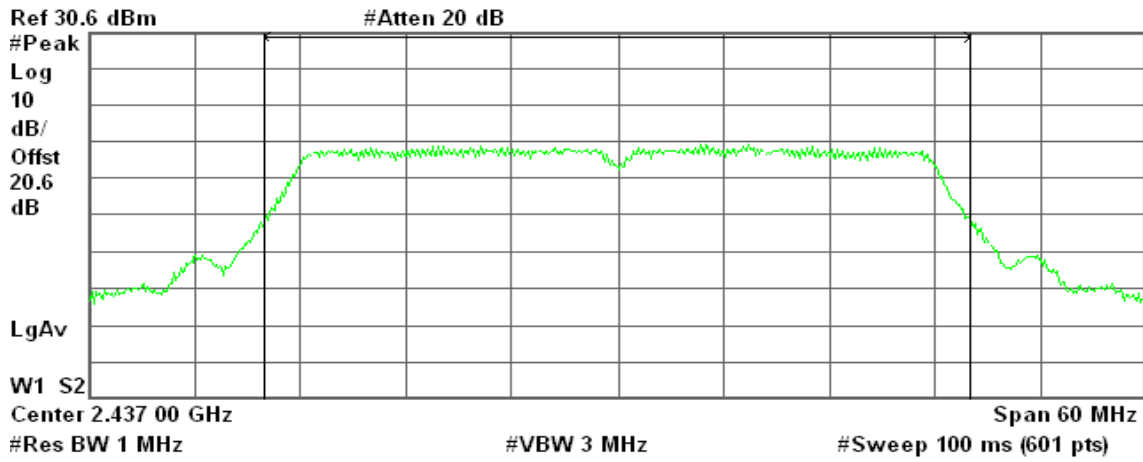

Channel Power

13.06 dBm / 40.0000 MHz


Power Spectral Density

-62.96 dBm/Hz

Peak Power (CH High)

Agilent 18:22:20 Aug 11, 2009

R T

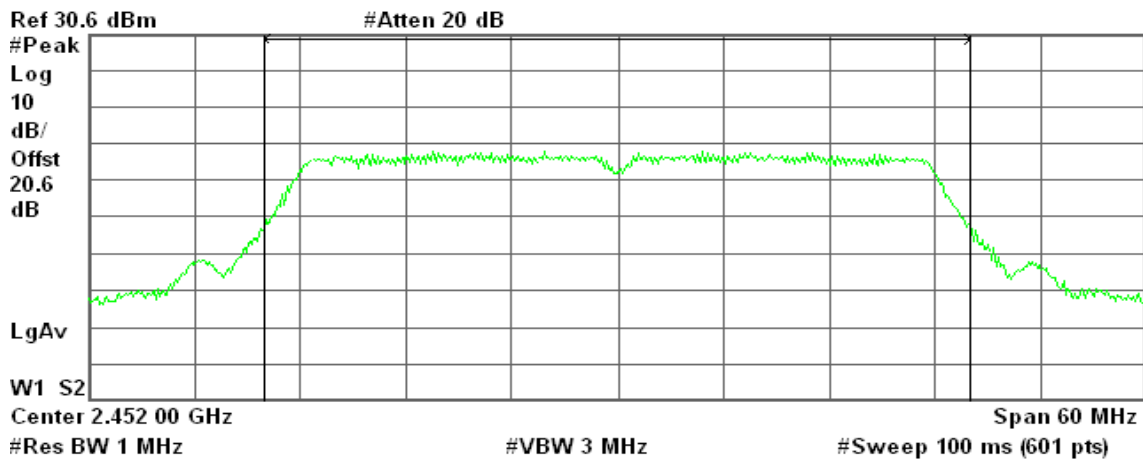

Channel Power

11.78 dBm / 40.0000 MHz

Power Spectral Density

-64.25 dBm/Hz




7.3 AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration

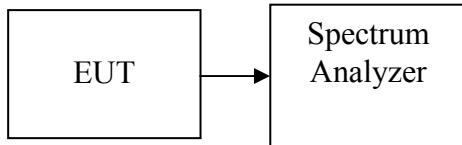

TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the average power detection.

TEST RESULTS

No non-compliance noted.



Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Output Power (dBm)
Low	2412	14.95
Mid	2437	15.34
High	2462	15.43

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)
Low	2412	9.24
Mid	2437	9.05
High	2462	8.81

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	Chain 1 Output Power (dBm)	Chain 2 Output Power (dBm)	Total Output Power (dBm)
Low	2412	5.86	5.55	8.72
Mid	2437	5.94	4.78	8.41
High	2462	5.77	4.07	8.01

Test mode: draft 802.11n Wide-40 MHz Channel mode

Channel	Frequency (MHz)	Chain 1 Output Power (dBm)	Chain 2 Output Power (dBm)	Total Output Power (dBm)
Low	2422	6.72	5.30	9.08
Mid	2437	6.49	5.60	9.08
High	2452	6.56	4.39	8.62

Remark: Total Output Power (w) = Chain 1 (10^(Output Power /10)/1000) + Chain 2 (10^(Output Power /10)/1000)




Test Plot

IEEE 802.11b mode

Average Power (CH Low)

Agilent 17:24:35 Aug 11, 2009

R T

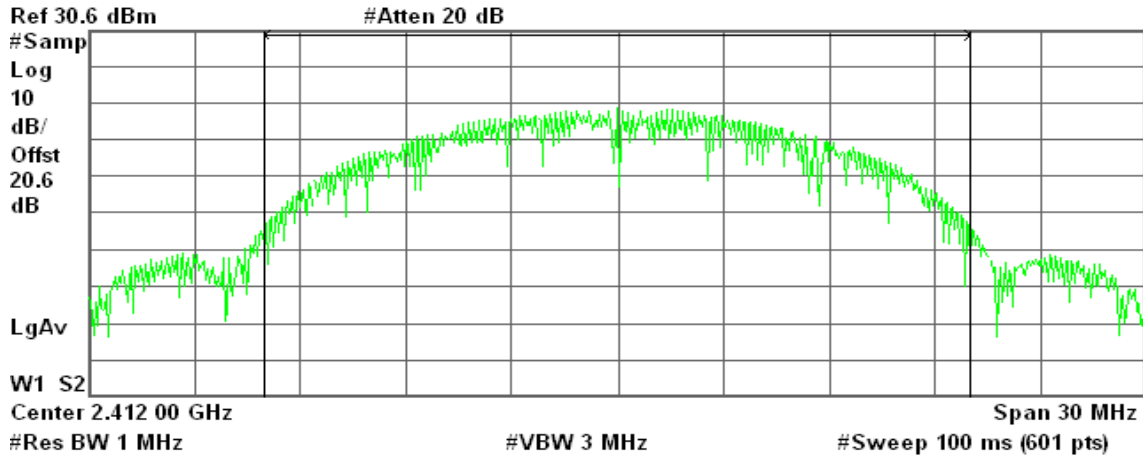

Channel Power

14.95 dBm / 20.0000 MHz


Power Spectral Density

-58.06 dBm/Hz

Average Power (CH Mid)

Agilent 17:26:57 Aug 11, 2009

R T

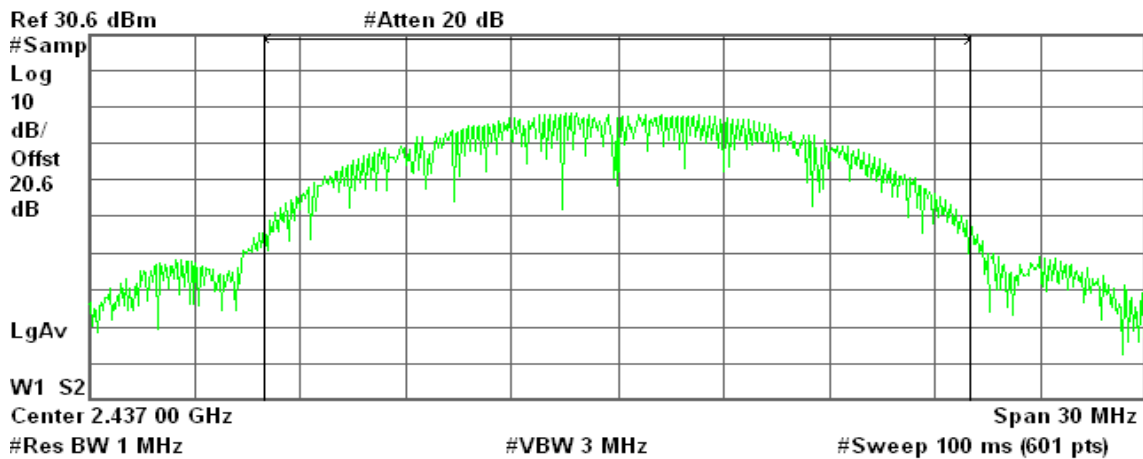

Channel Power

15.34 dBm / 20.0000 MHz

Power Spectral Density


-57.67 dBm/Hz



Average Power (CH High)

Agilent 17:28:18 Aug 11, 2009

R T

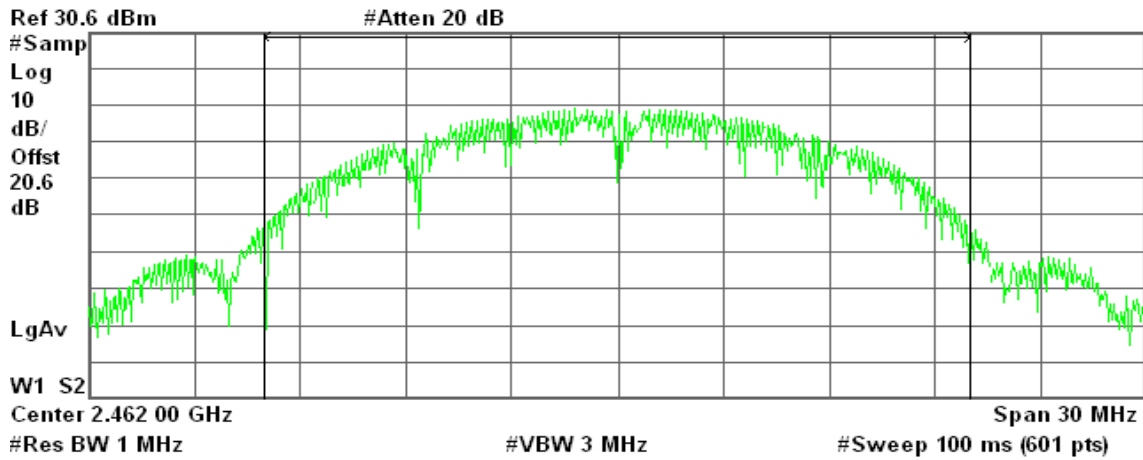

Channel Power

15.43 dBm / 20.0000 MHz

Power Spectral Density


-57.59 dBm/Hz

IEEE 802.11g mode

Average Power (CH Low)

Agilent 17:32:31 Aug 11, 2009

R T

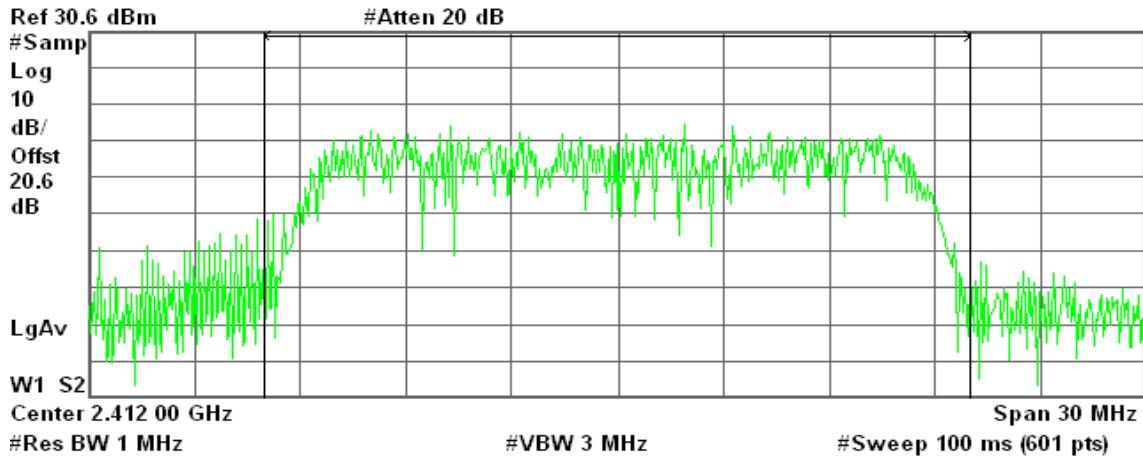

Channel Power

9.24 dBm / 20.0000 MHz

Power Spectral Density


-63.77 dBm/Hz



Average Power (CH Mid)

Agilent 17:31:34 Aug 11, 2009

R T

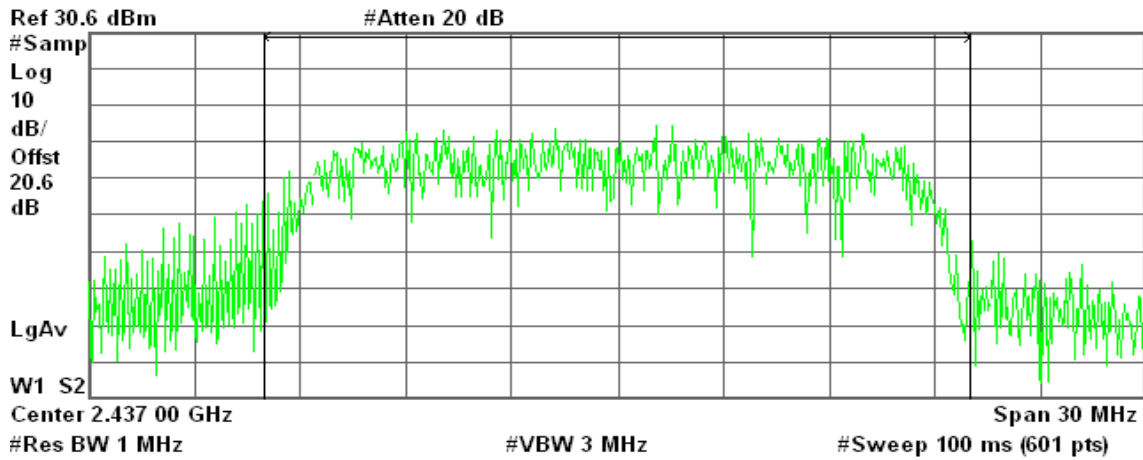

Channel Power

9.05 dBm / 20.0000 MHz


Power Spectral Density

-63.96 dBm/Hz

Average Power (CH High)

Agilent 17:30:29 Aug 11, 2009

R T

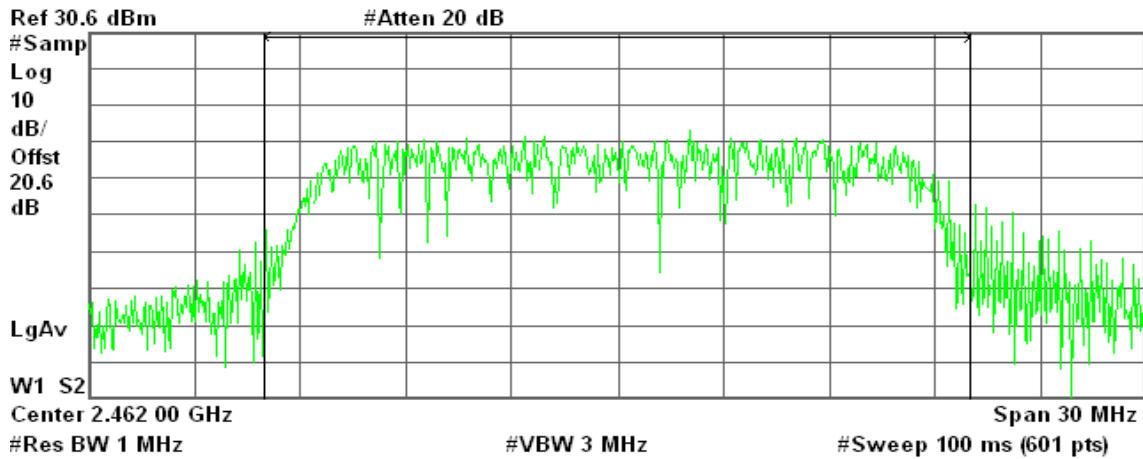

Channel Power

8.81 dBm / 20.0000 MHz

Power Spectral Density

-64.20 dBm/Hz




draft 802.11n Standard-20 MHz Channel mode / Chain 1

Average Power (CH Low)

Agilent 17:38:01 Aug 11, 2009

R T

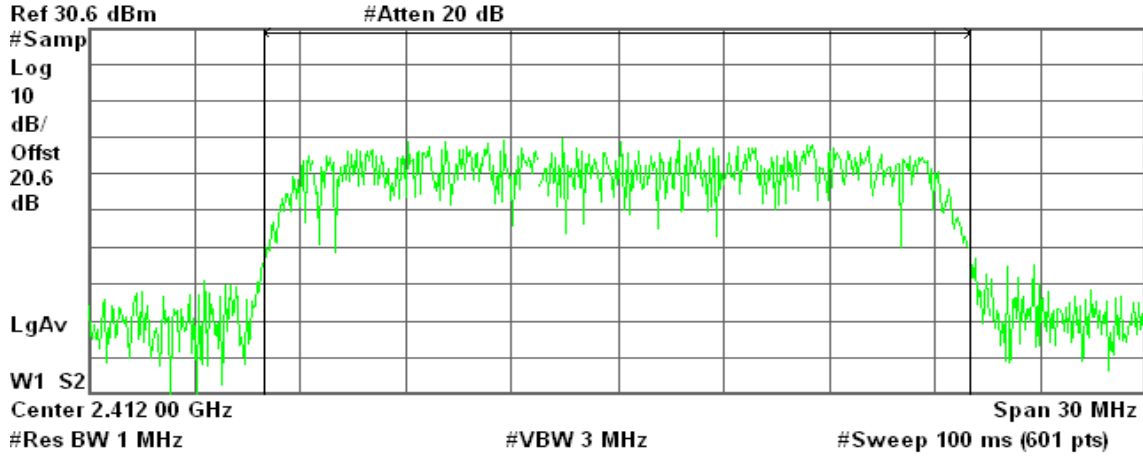

Channel Power

5.86 dBm / 20.0000 MHz


Power Spectral Density

-67.15 dBm/Hz

Average Power (CH Mid)

Agilent 17:39:07 Aug 11, 2009

R T

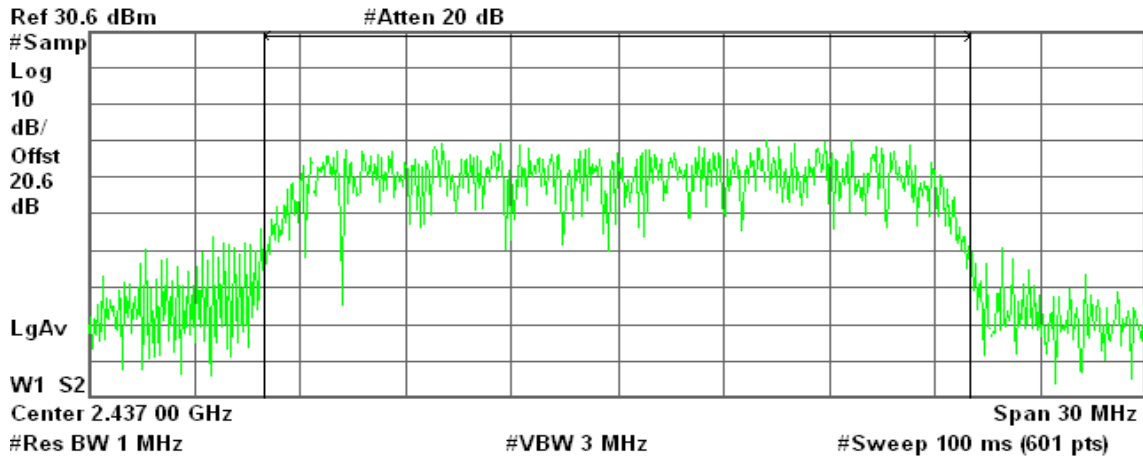

Channel Power

5.94 dBm / 20.0000 MHz

Power Spectral Density


-67.07 dBm/Hz



Average Power (CH High)

Agilent 17:40:42 Aug 11, 2009

R T

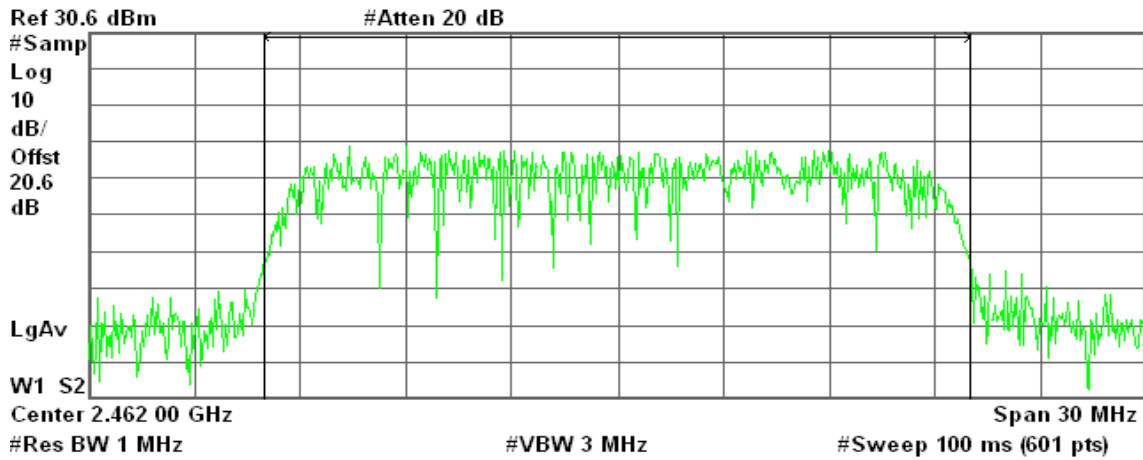

Channel Power

5.77 dBm / 20.0000 MHz

Power Spectral Density


-67.24 dBm/Hz

draft 802.11n Standard-20 MHz Channel mode / Chain 2

Average Power (CH Low)

Agilent 18:34:50 Aug 11, 2009

R T

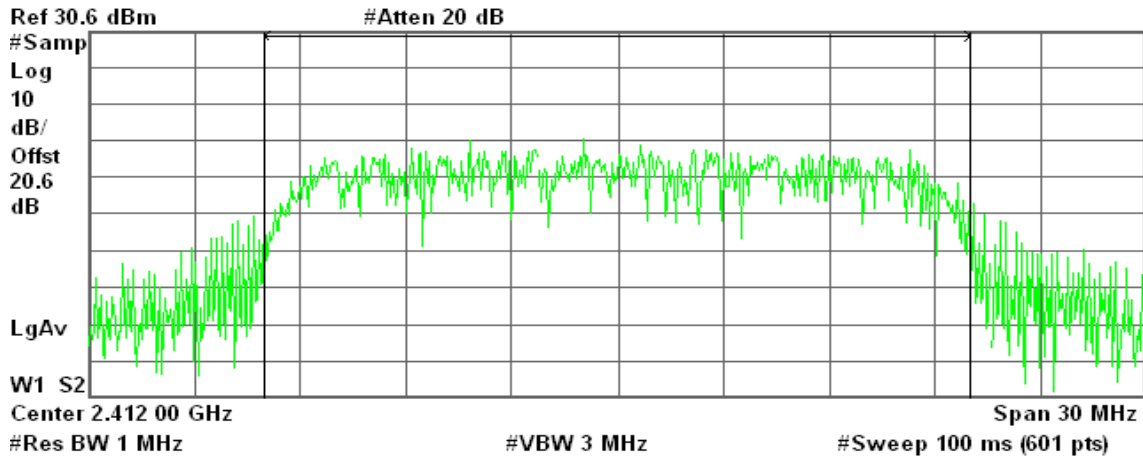

Channel Power

5.55 dBm / 20.0000 MHz

Power Spectral Density


-67.46 dBm/Hz



Average Power (CH Mid)

Agilent 18:36:13 Aug 11, 2009

R T

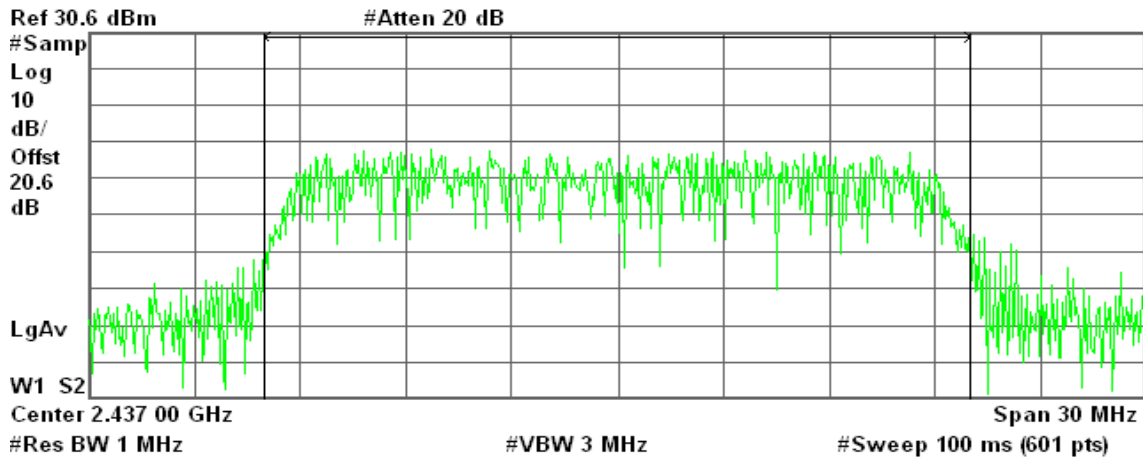

Channel Power

4.78 dBm / 20.0000 MHz


Power Spectral Density

-68.23 dBm/Hz

Average Power (CH High)

Agilent 18:37:14 Aug 11, 2009

R T

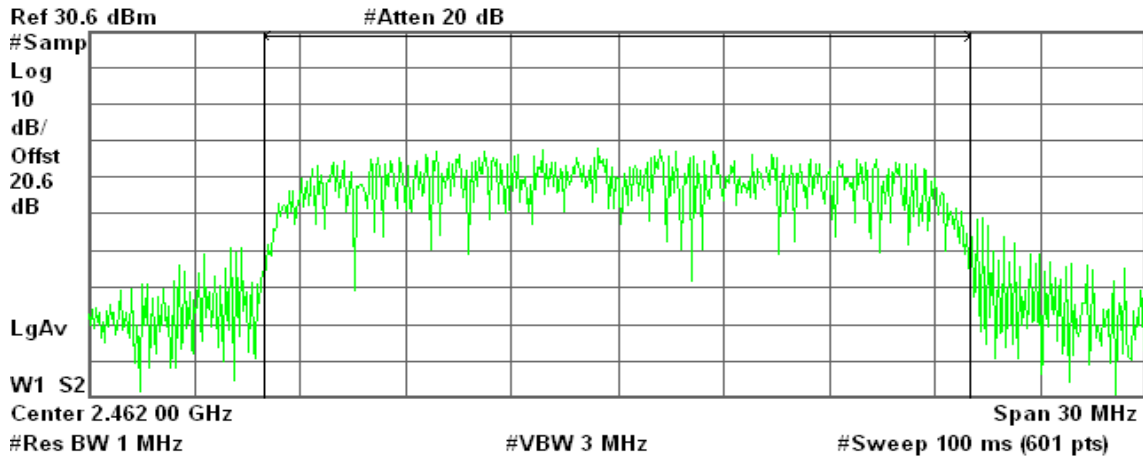

Channel Power

4.07 dBm / 20.0000 MHz

Power Spectral Density

-68.94 dBm/Hz




draft 802.11n Wide-40 MHz Channel mode / Chain 1

Average Power (CH Low)

Agilent 18:27:59 Aug 11, 2009

R T

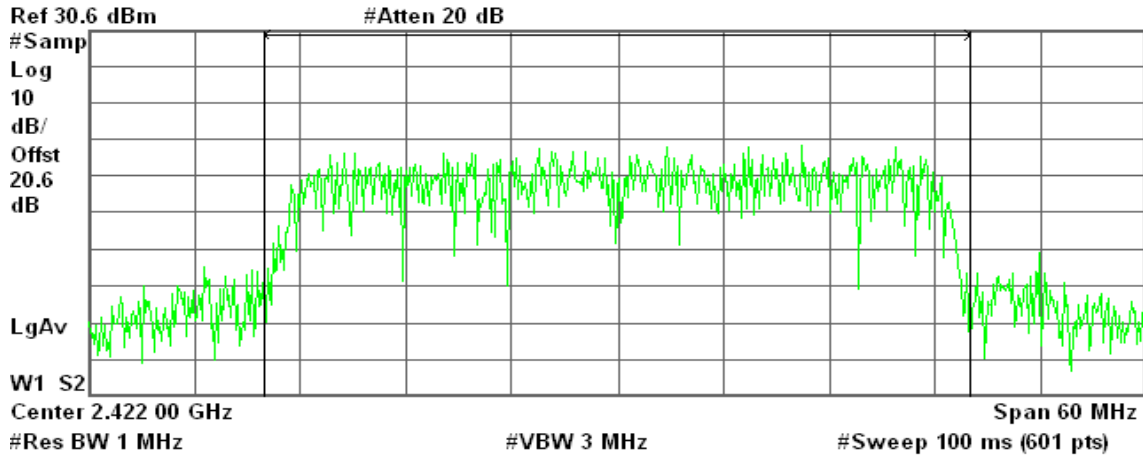

Channel Power

6.72 dBm / 40.0000 MHz


Power Spectral Density

-69.30 dBm/Hz

Average Power (CH Mid)

Agilent 18:26:07 Aug 11, 2009

R T

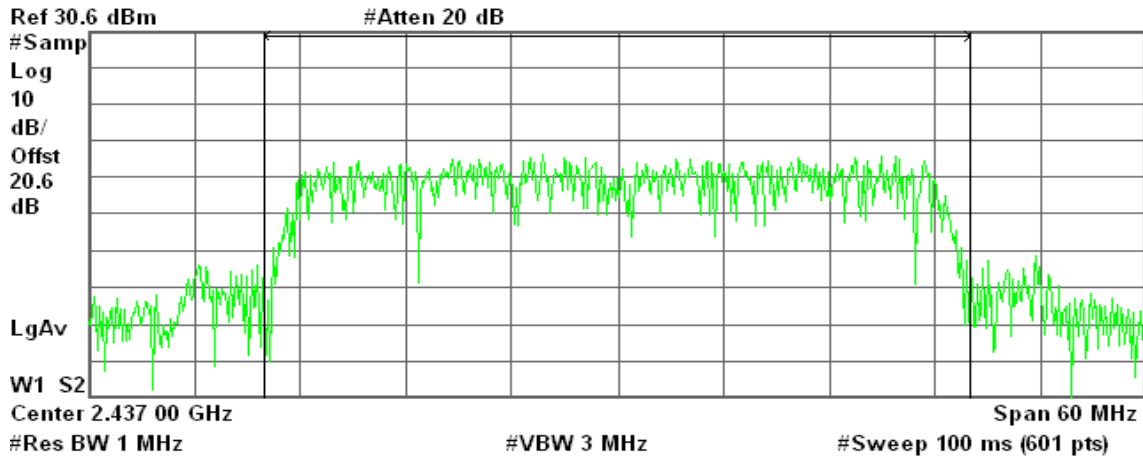

Channel Power

6.49 dBm / 40.0000 MHz

Power Spectral Density


-69.53 dBm/Hz



Average Power (CH High)

Agilent 18:21:30 Aug 11, 2009

R T

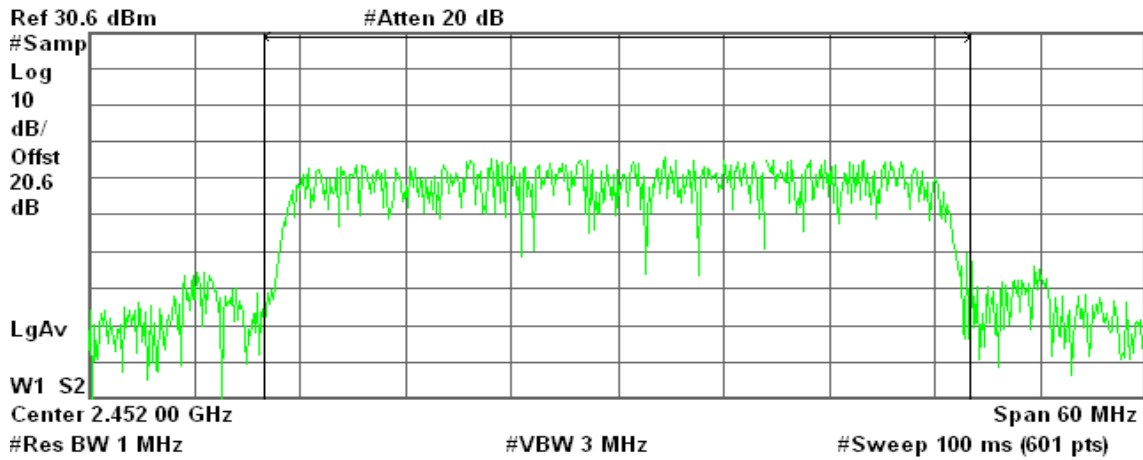

Channel Power

6.56 dBm / 40.0000 MHz

Power Spectral Density


-69.46 dBm/Hz

draft 802.11n Wide-40 MHz Channel mode / Chain 2

Average Power (CH Low)

Agilent 18:28:18 Aug 11, 2009

R T

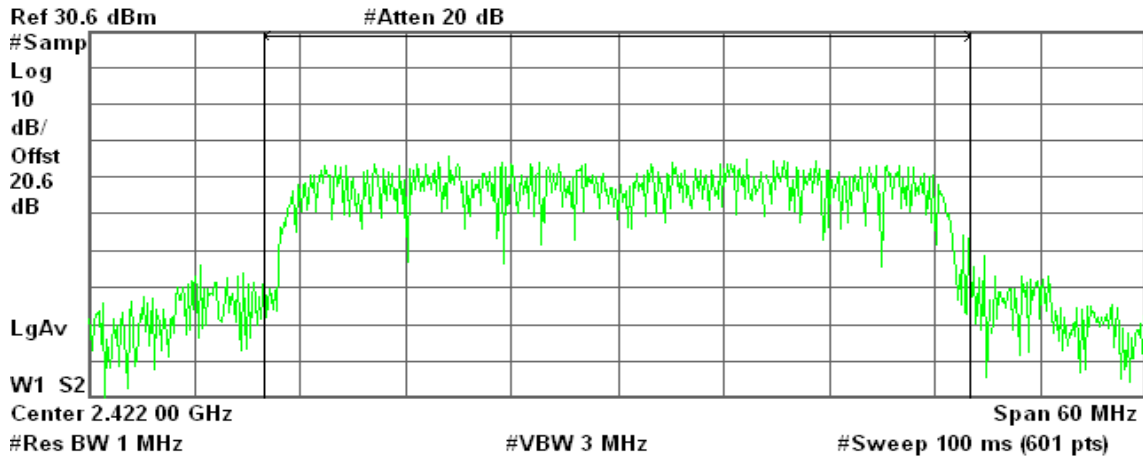

Channel Power

5.30 dBm / 40.0000 MHz

Power Spectral Density


-70.72 dBm/Hz



Average Power (CH Mid)

Agilent 18:26:25 Aug 11, 2009

R T

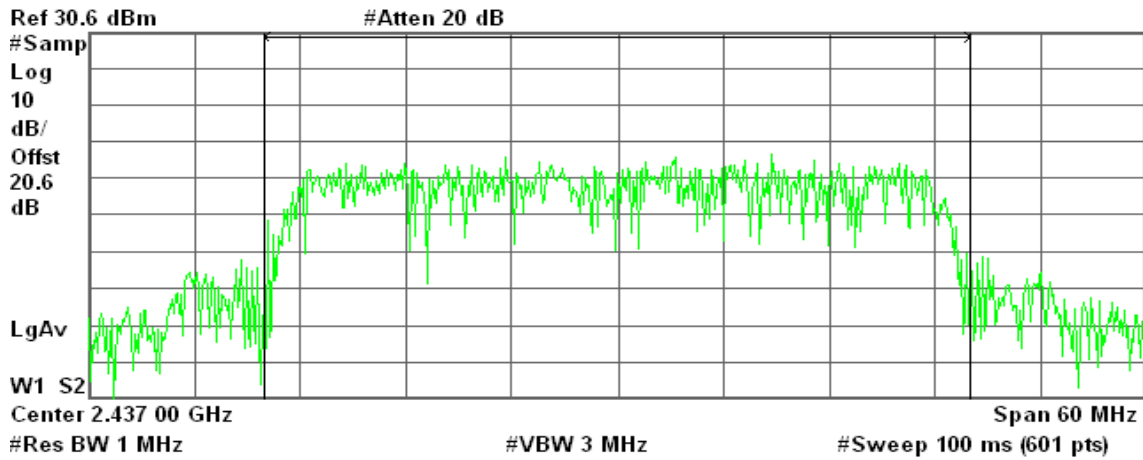

Channel Power

5.60 dBm / 40.0000 MHz


Power Spectral Density

-70.42 dBm/Hz

Average Power (CH High)

Agilent 18:21:52 Aug 11, 2009

R T

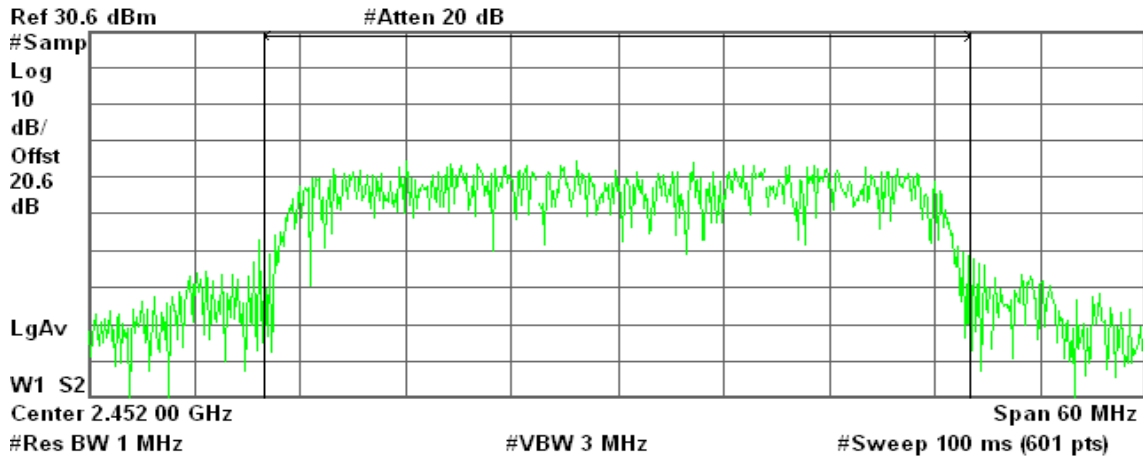

Channel Power

4.39 dBm / 40.0000 MHz

Power Spectral Density


-71.63 dBm/Hz

7.4 BAND EDGES MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

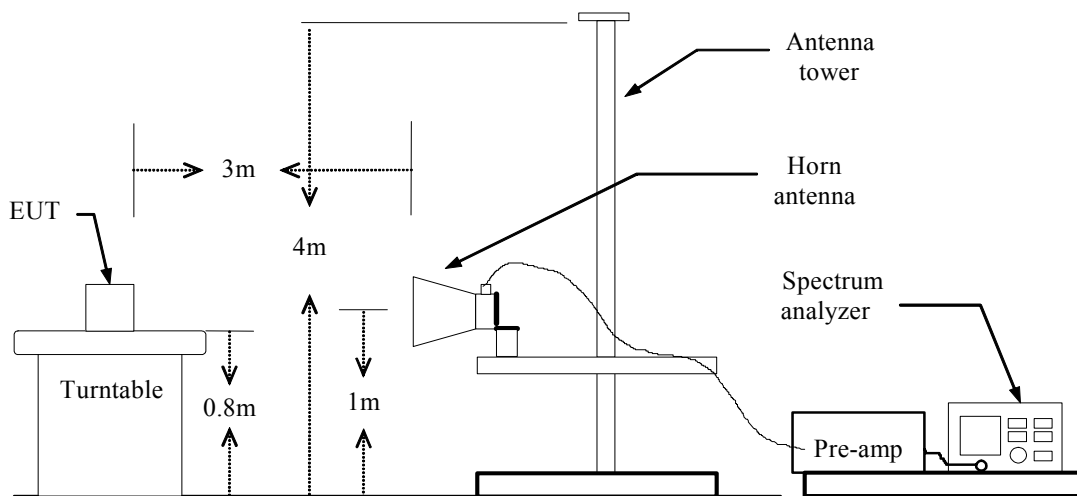

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.




Band Edges (IEEE 802.11b mode / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent

R T

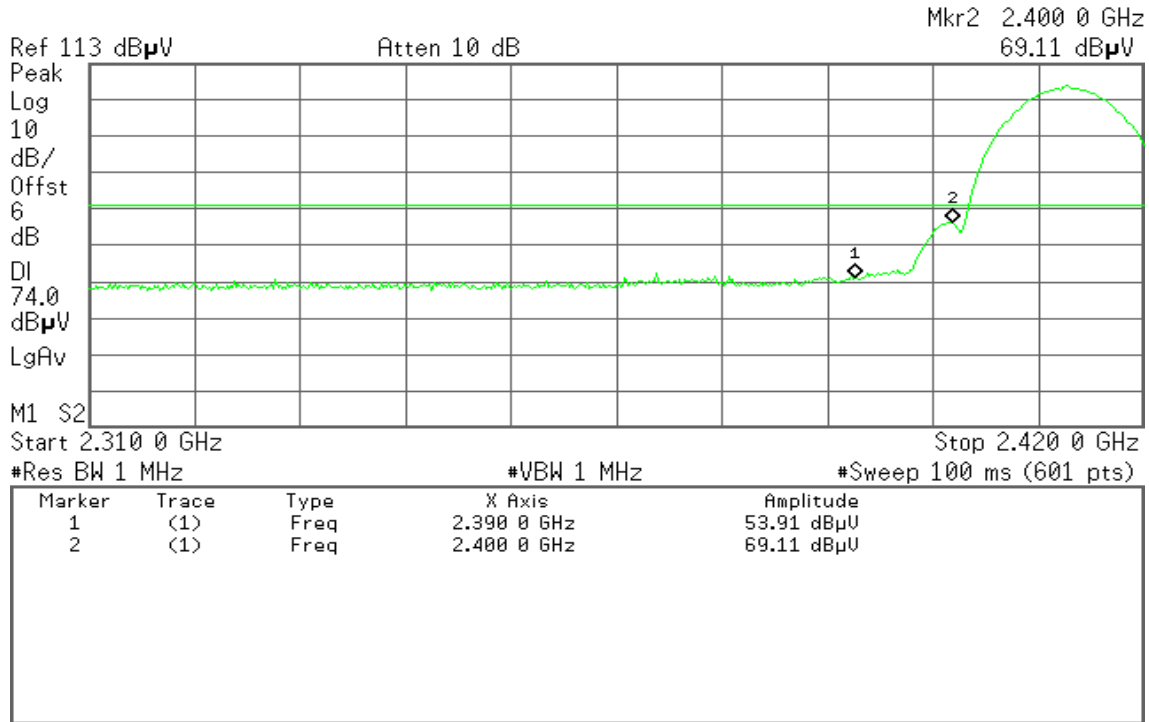


Detector mode: Average

Polarity: Vertical

Agilent

R T

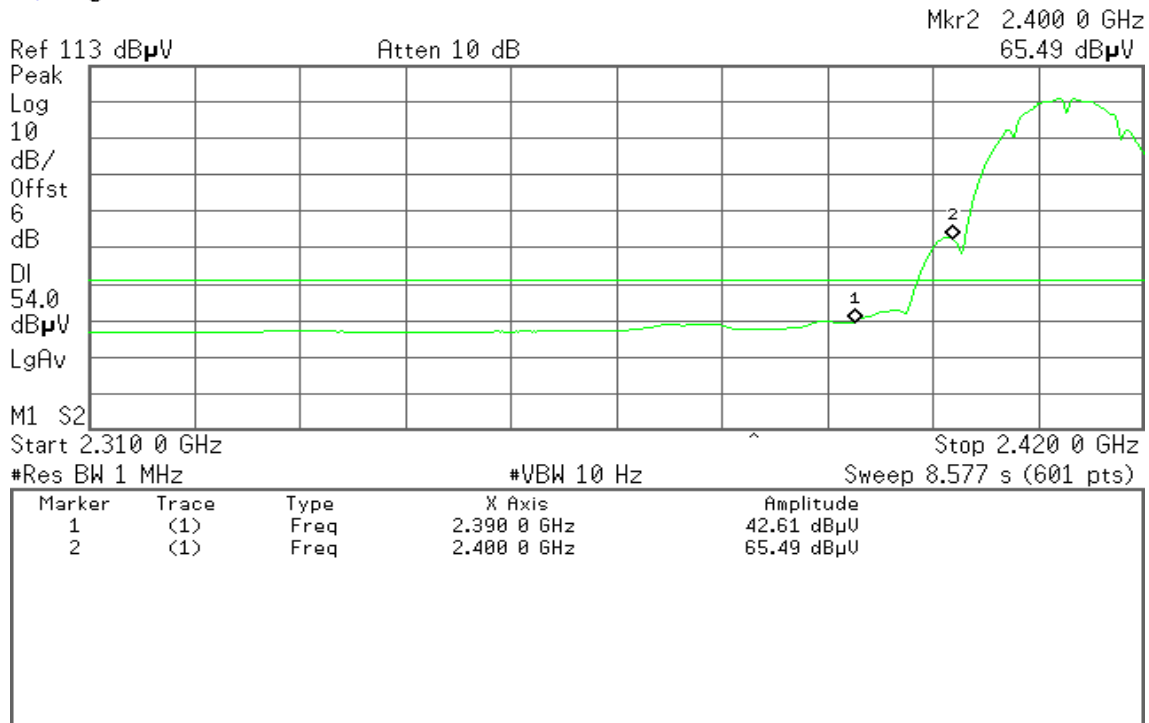




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

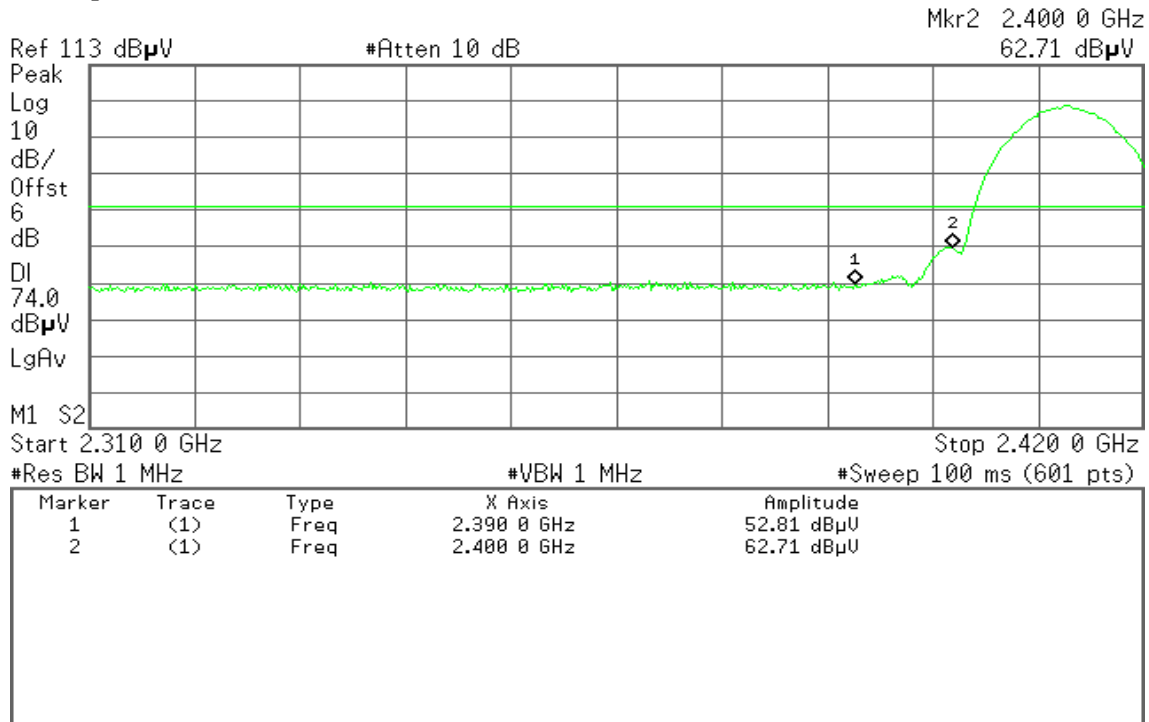


Detector mode: Average

Polarity: Horizontal

Agilent

R T

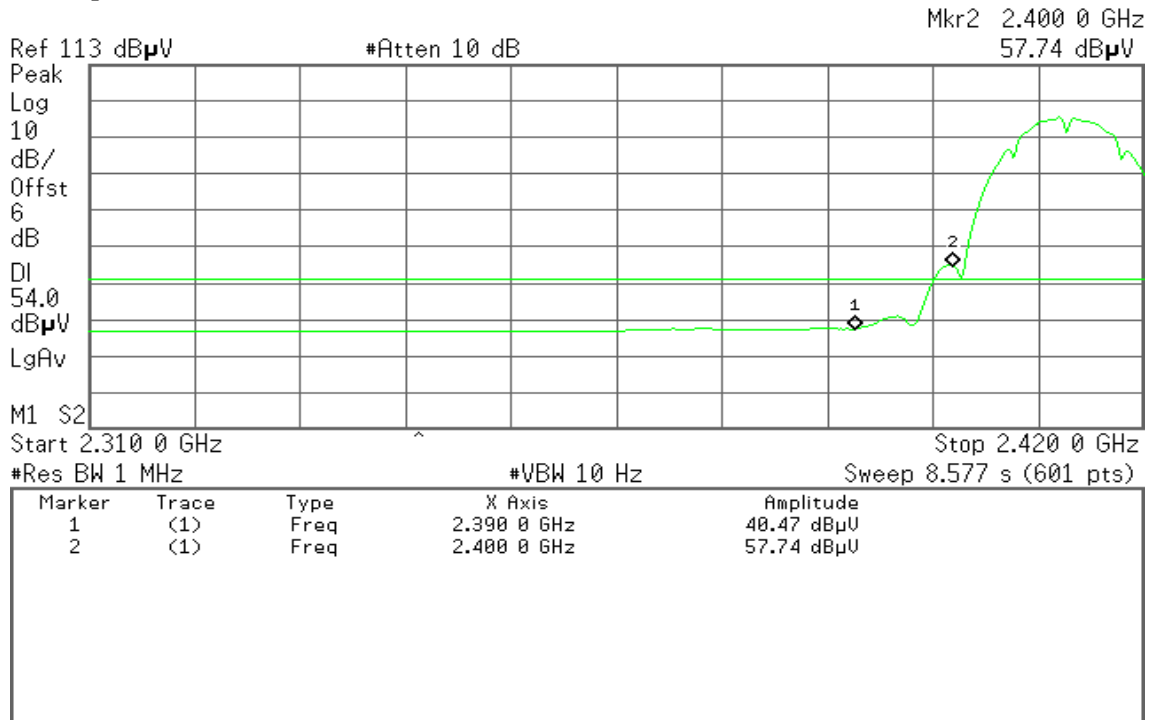



Band Edges (IEEE 802.11b mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent

R T

Mkr1 2.483 50 GHz
54.78 dBμV

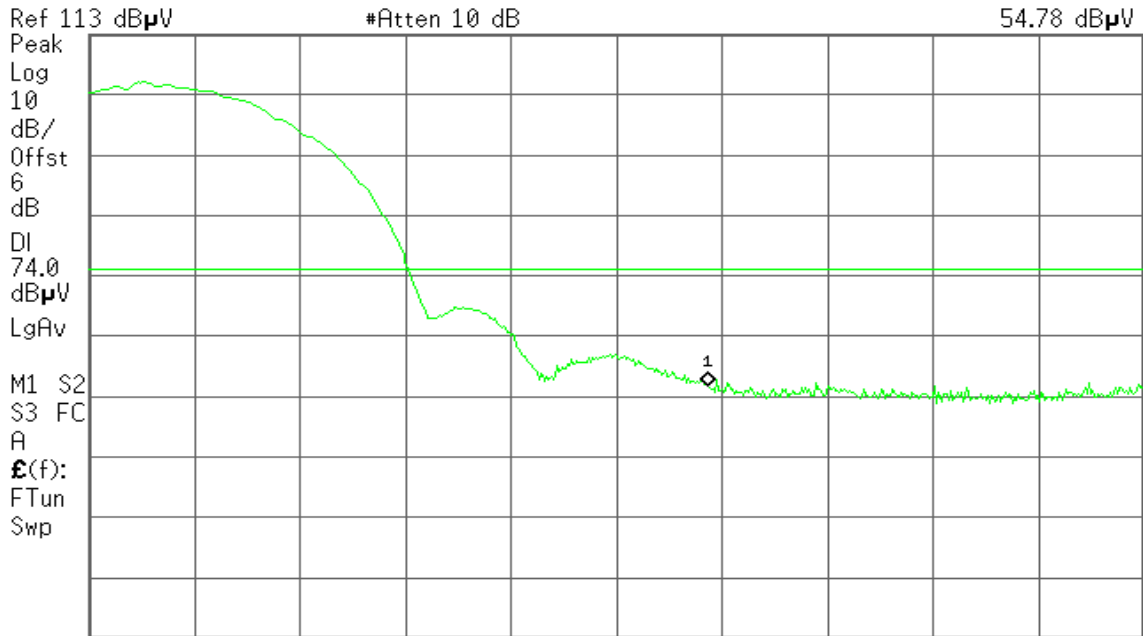

Start 2.460 00 GHz Stop 2.500 00 GHz
#Res BW 1 MHz #VBW 1 MHz #Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent

R T

Mkr1 2.483 50 GHz
44.58 dBμV

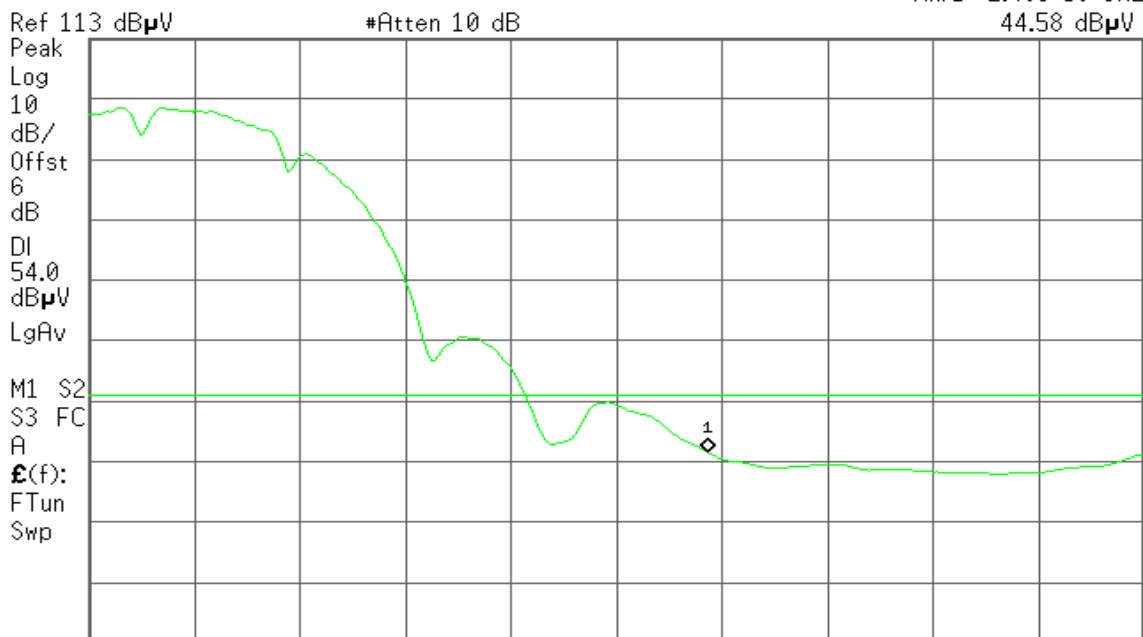

Start 2.460 00 GHz Stop 2.500 00 GHz
#Res BW 1 MHz #VBW 10 Hz Sweep 3.119 s (601 pts)



Detector mode: Peak

Polarity: Horizontal


Agilent

R T

Mkr1 2.483 50 GHz
53.27 dBμV

Ref 113 dBμV

#Atten 10 dB

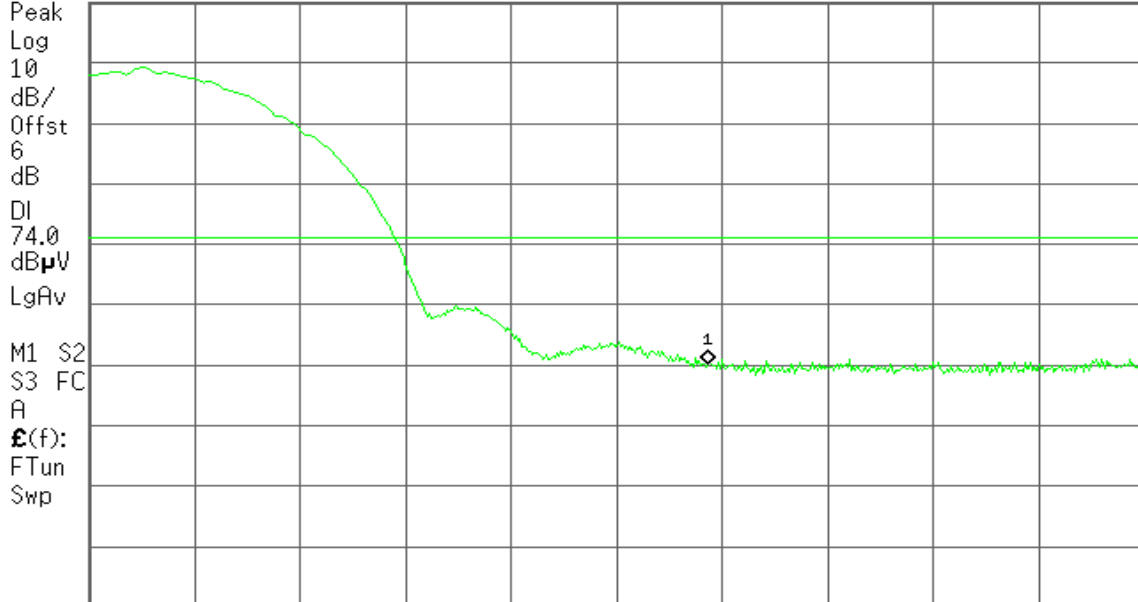

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal


Agilent

R T

Mkr1 2.483 50 GHz
41.51 dBμV

Ref 113 dBμV

#Atten 10 dB

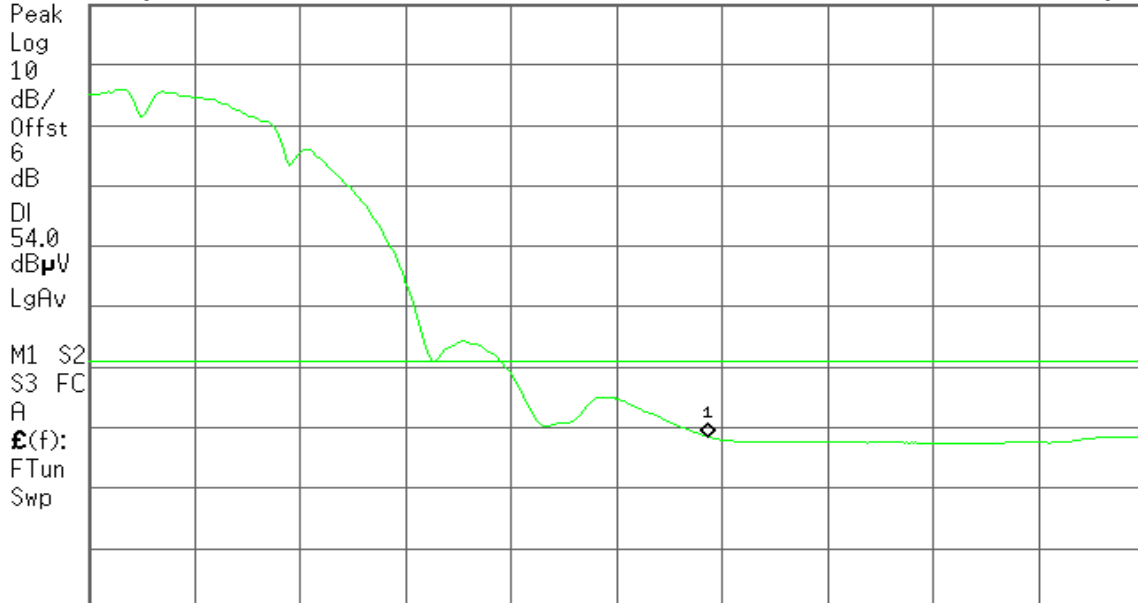

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)




Band Edges (IEEE 802.11g mode / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent

R T

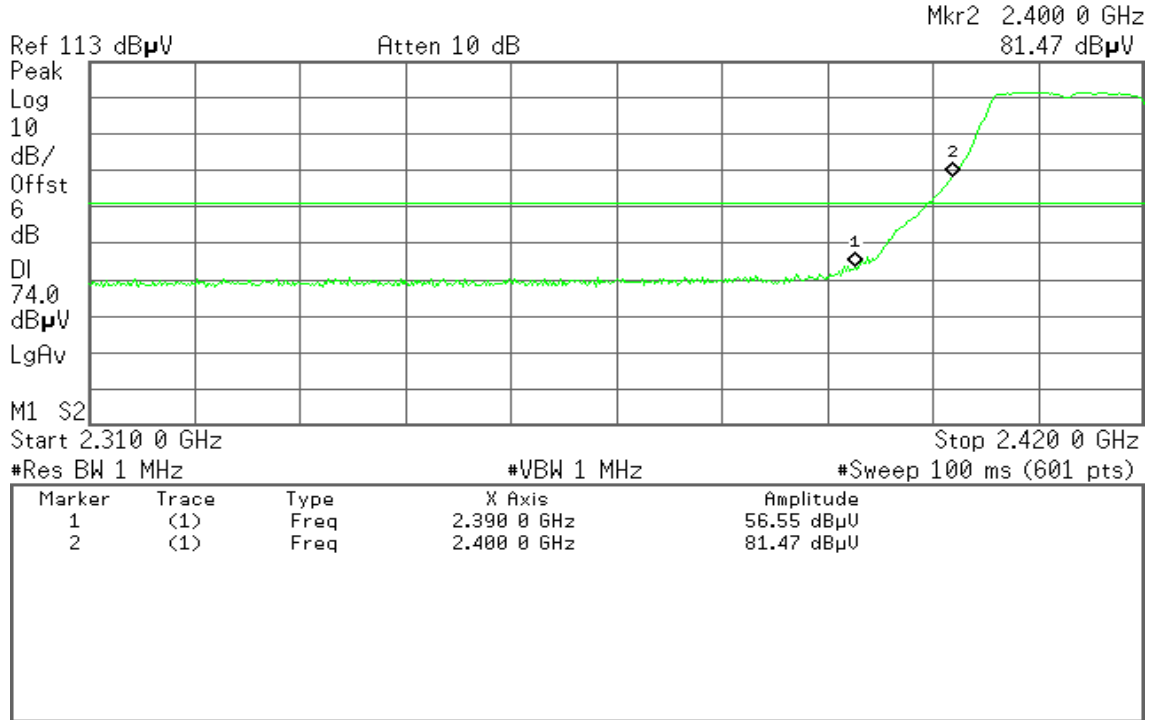


Detector mode: Average

Polarity: Vertical

Agilent

R L

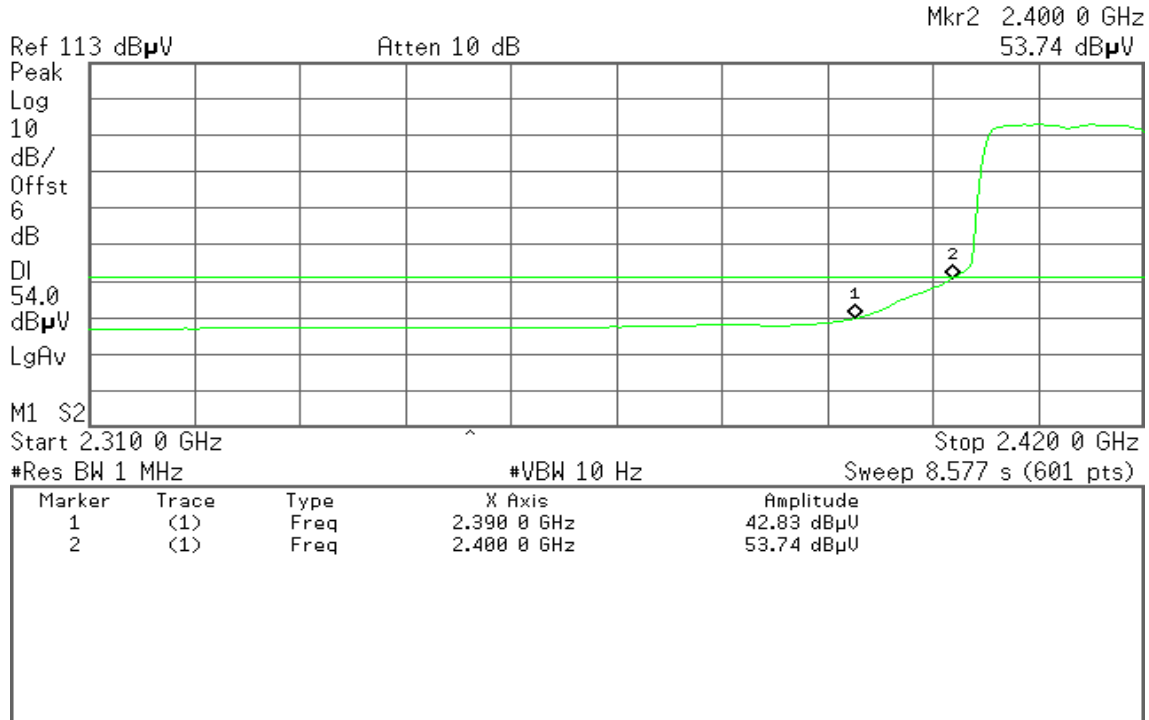




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

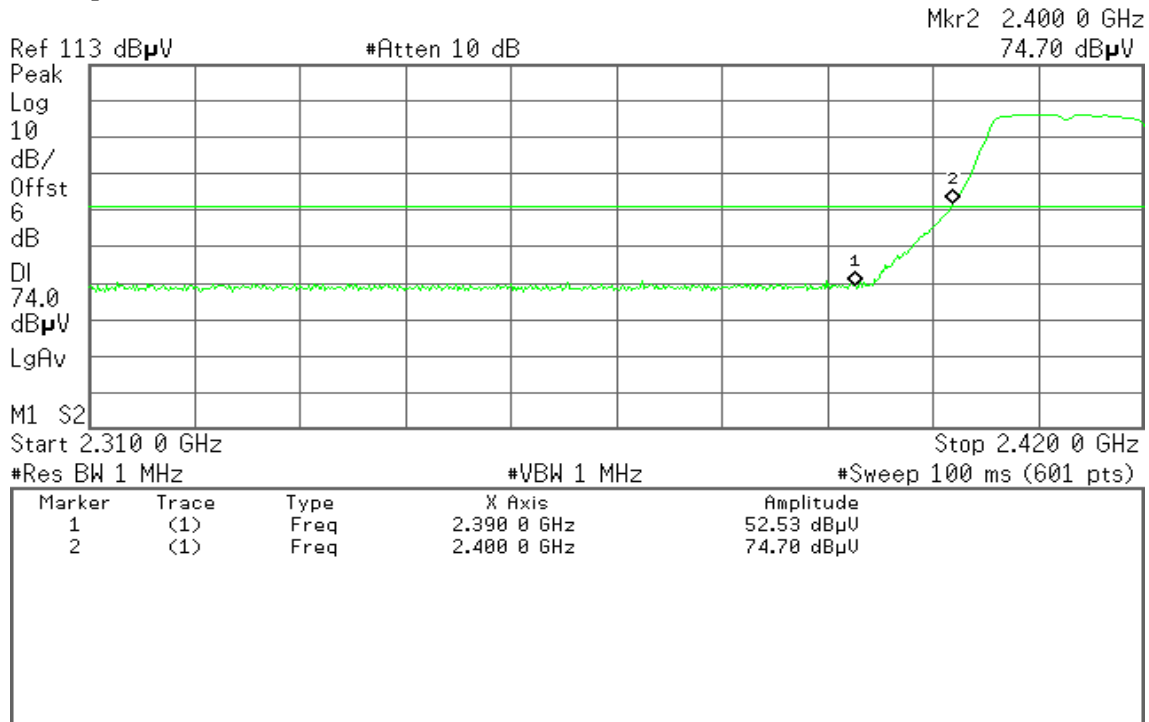


Detector mode: Average

Polarity: Horizontal

Agilent

R T

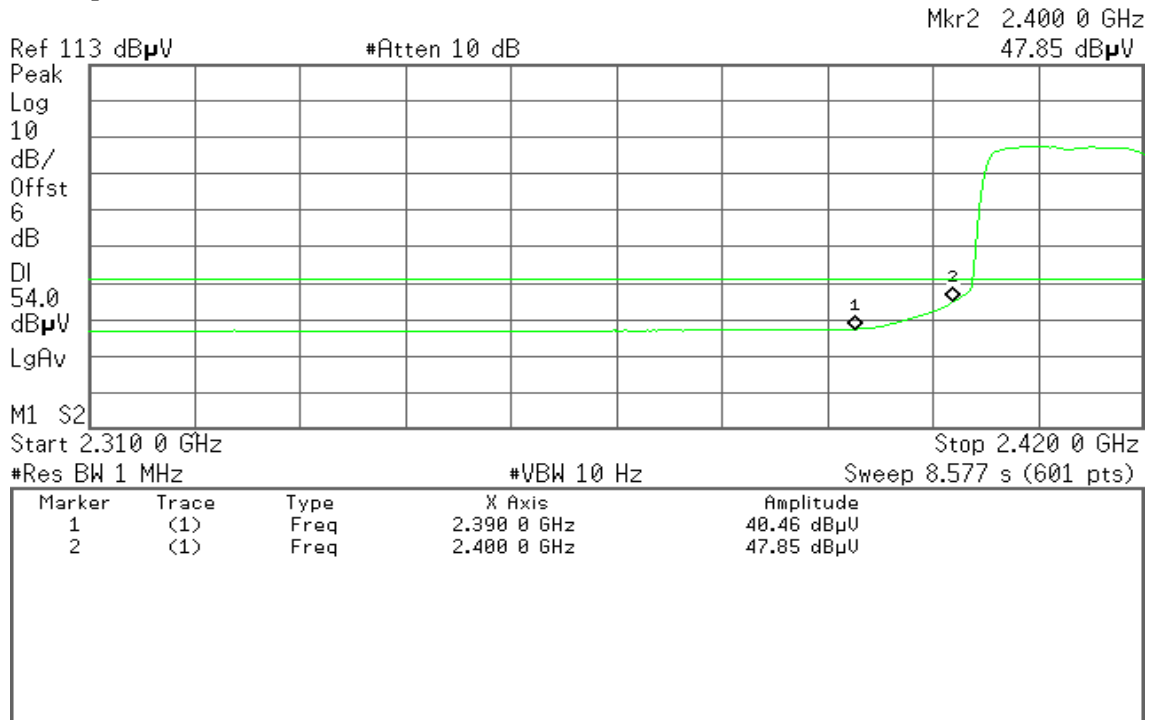



Band Edges (IEEE 802.11g mode / CH High)

Detector mode: Peak

Polarity: Vertical


Agilent

R T

Mkr1 2.483 50 GHz
53.77 dBμV

Ref 113 dBμV

#Atten 10 dB

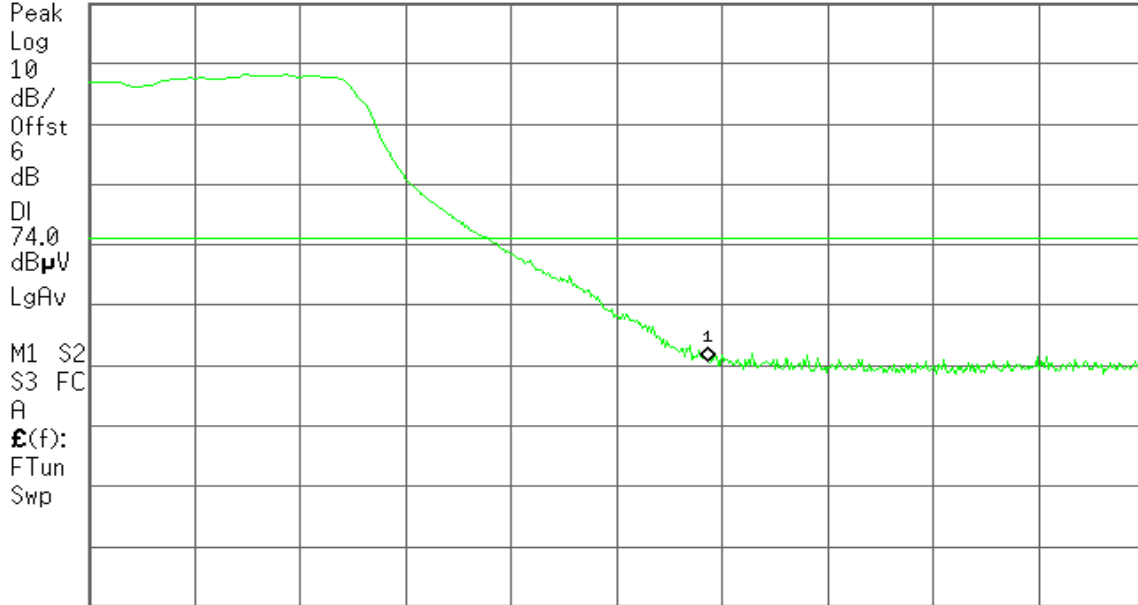

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Vertical


Agilent

R T

Mkr1 2.483 50 GHz
42.07 dBμV

Ref 113 dBμV

#Atten 10 dB

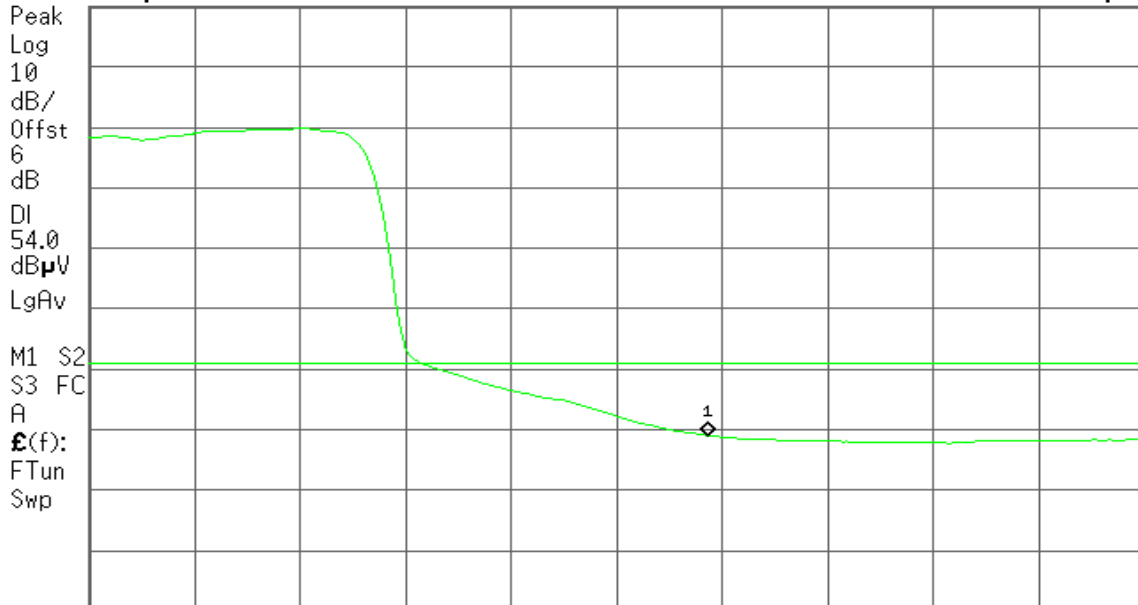

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)



Detector mode: Peak

Polarity: Horizontal


Agilent

R T

Mkr1 2.483 50 GHz
52.50 dBμV

Ref 113 dBμV

#Atten 10 dB

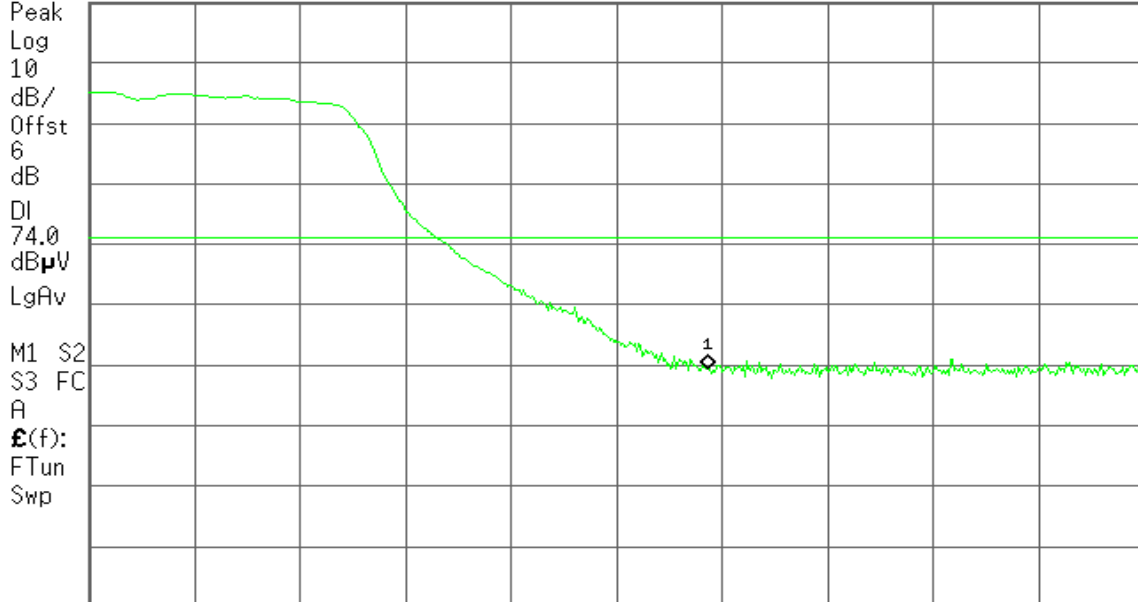

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal


Agilent

R T

Mkr1 2.483 50 GHz
40.79 dBμV

Ref 113 dBμV

#Atten 10 dB

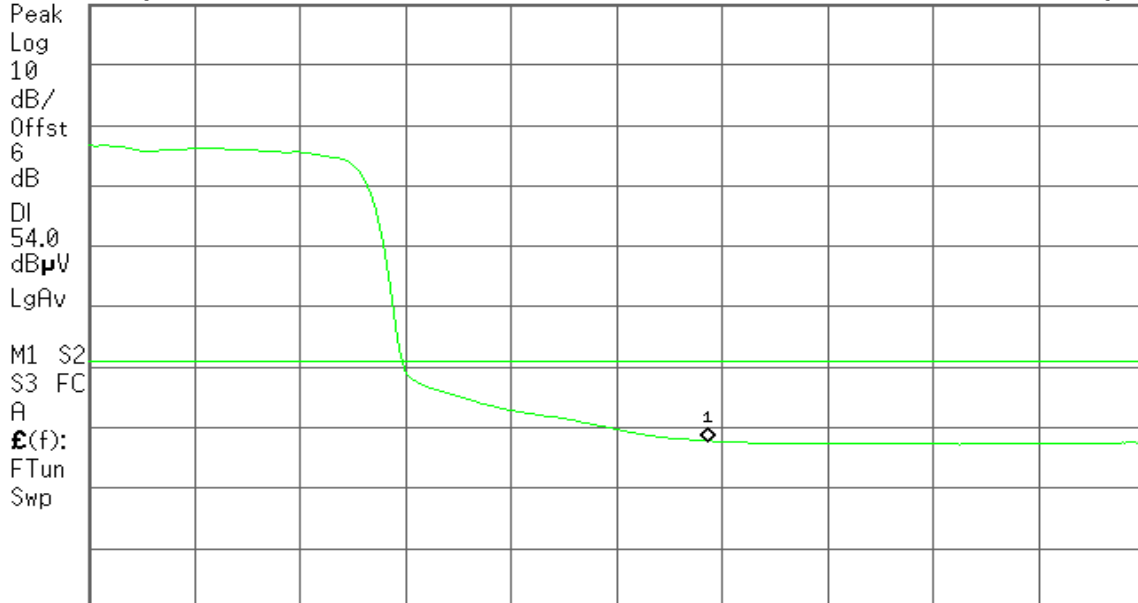

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)




Band Edges (draft 802.11n Standard-20 MHz Channel mode / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent

R T

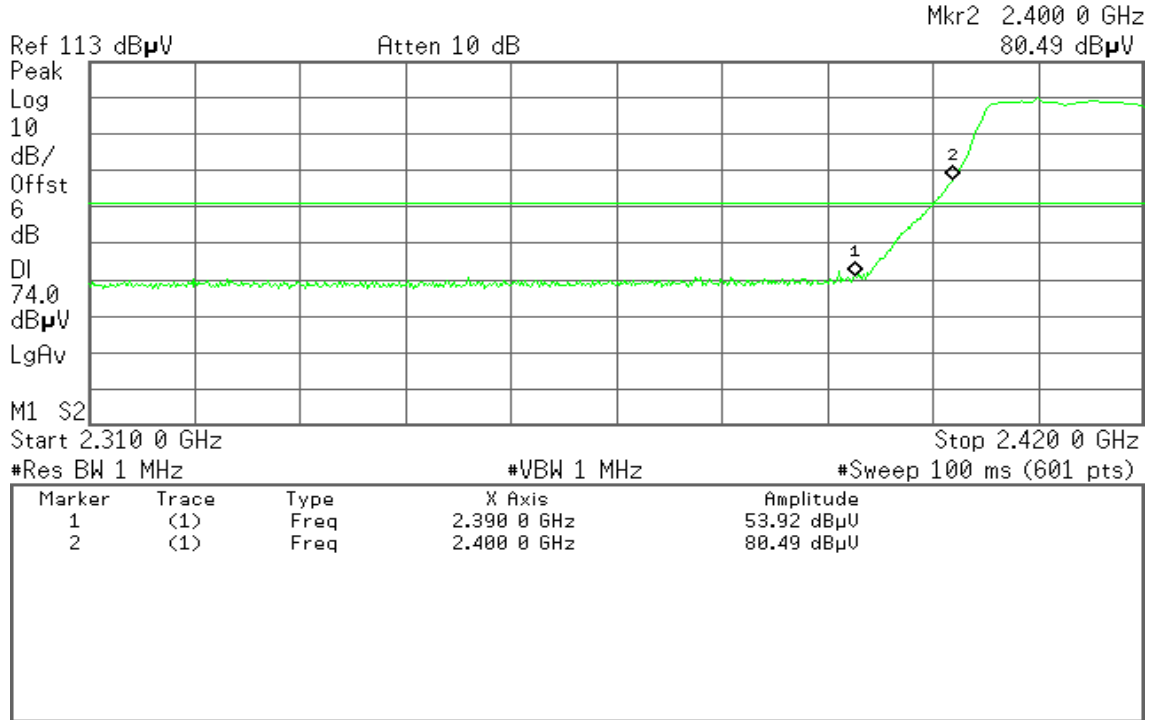


Detector mode: Average

Polarity: Vertical

Agilent

R T

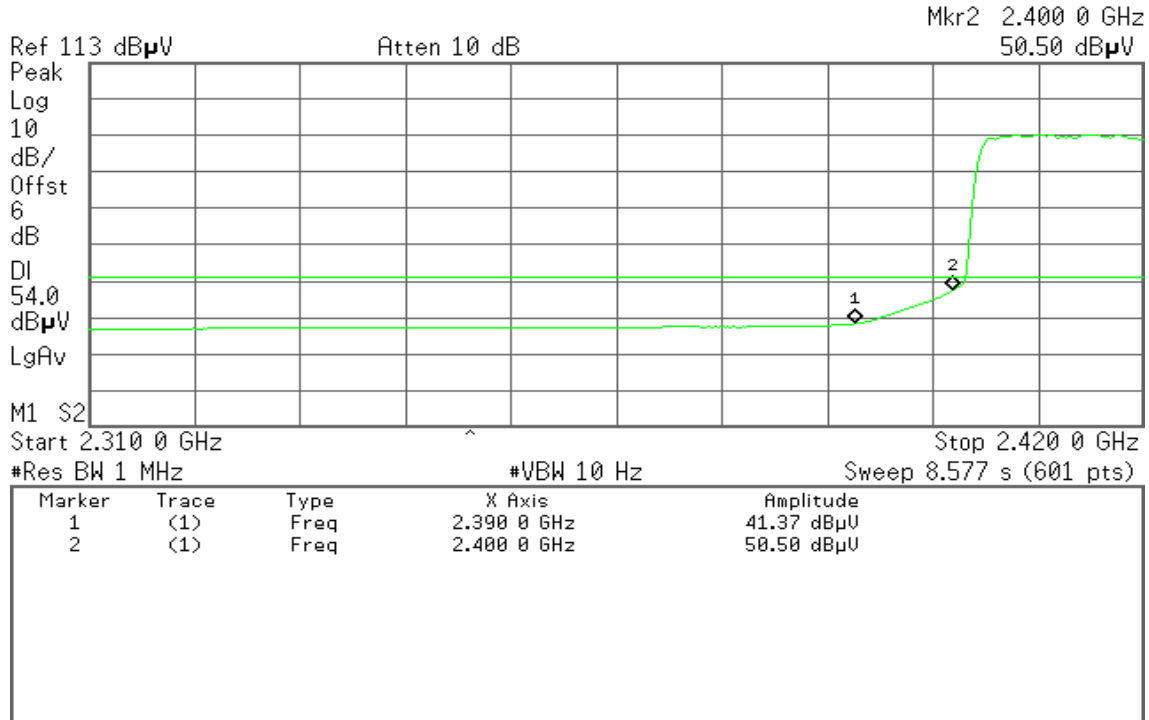




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

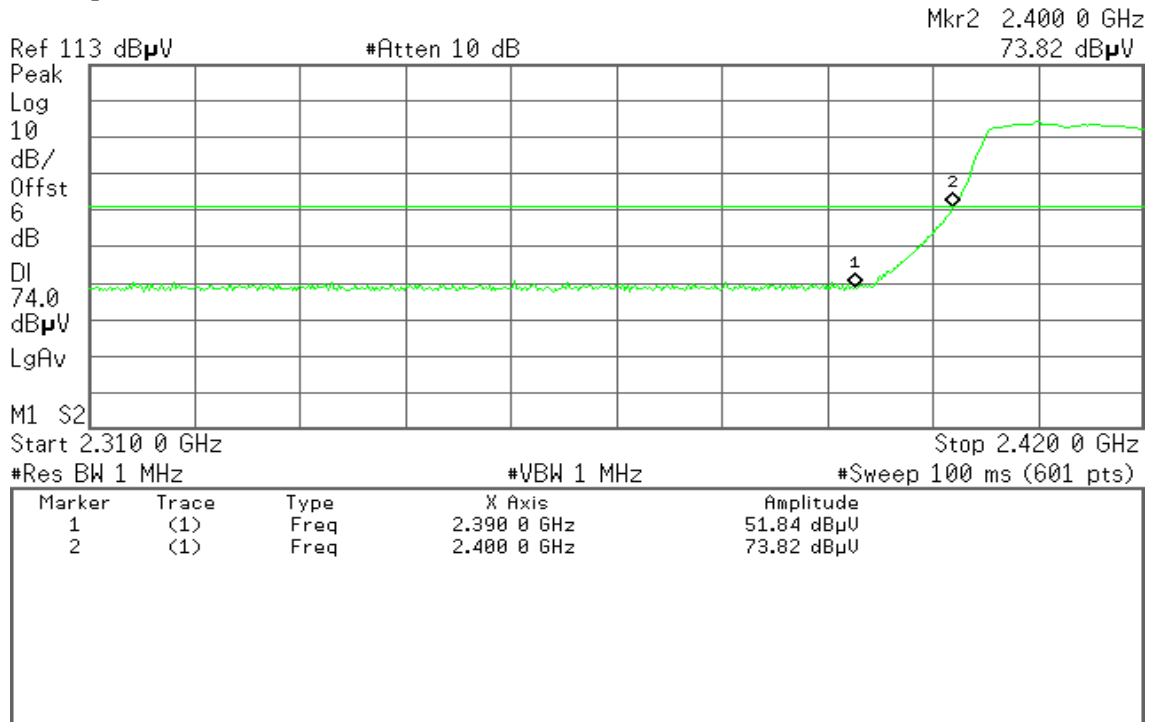


Detector mode: Average

Polarity: Horizontal

Agilent

R T

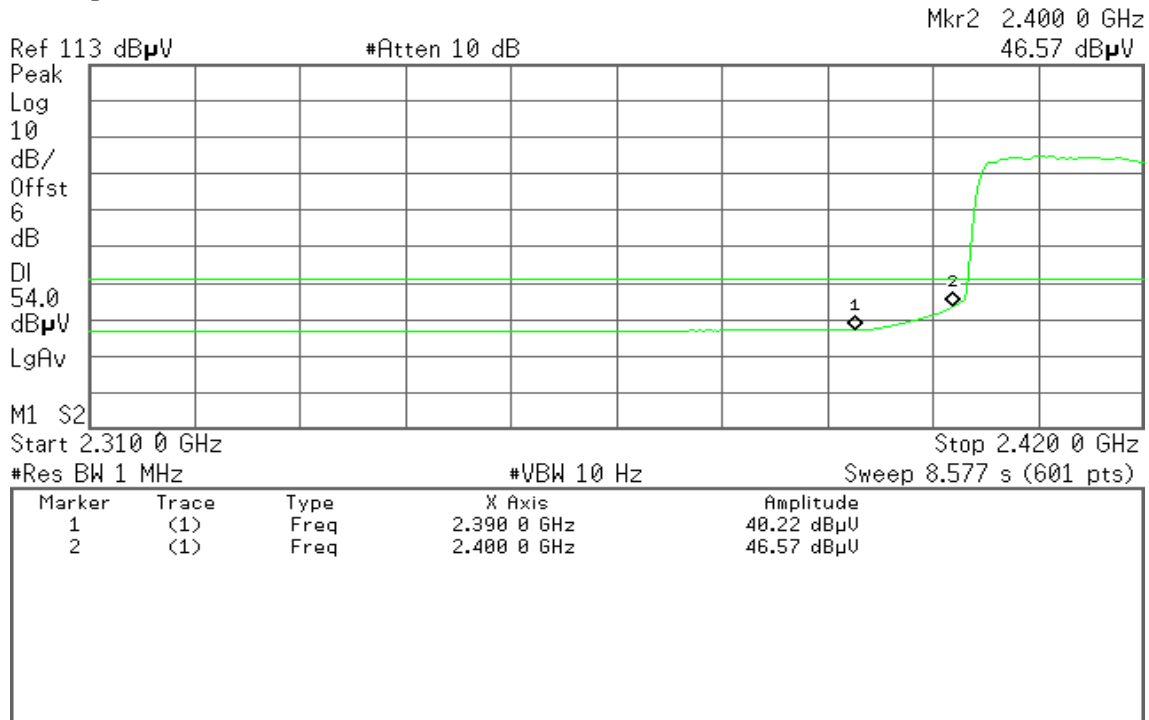



Band Edges (draft 802.11n Standard-20 MHz Channel mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent

R T

Mkr1 2.483 50 GHz
53.44 dB μ V

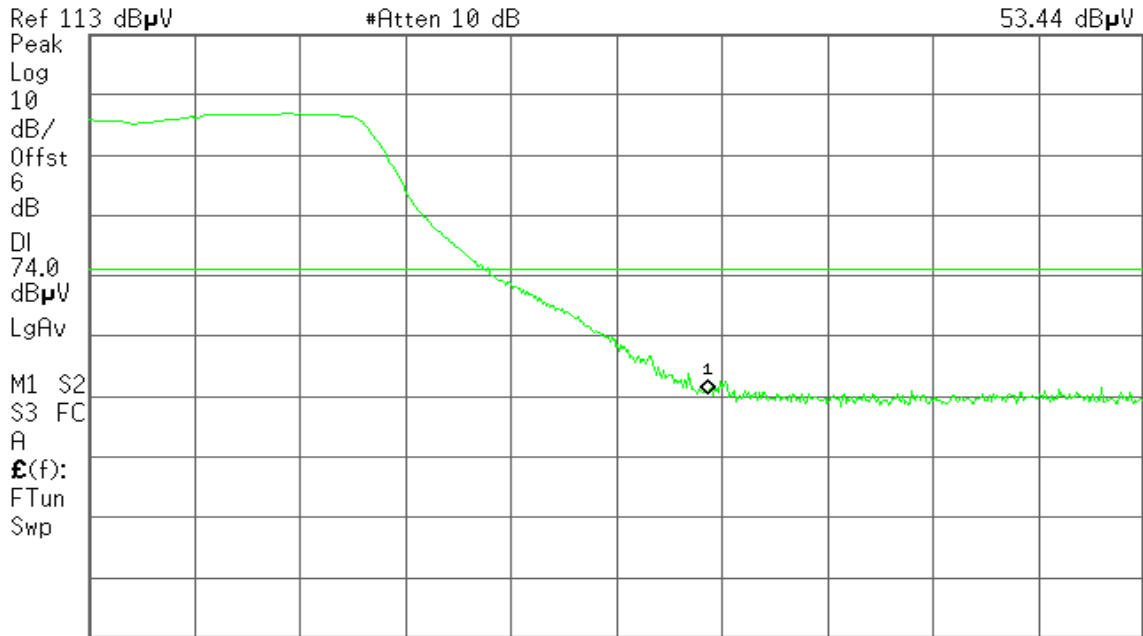


Detector mode: Average

Polarity: Vertical

Agilent

R T

Mkr1 2.483 50 GHz
41.82 dB μ V

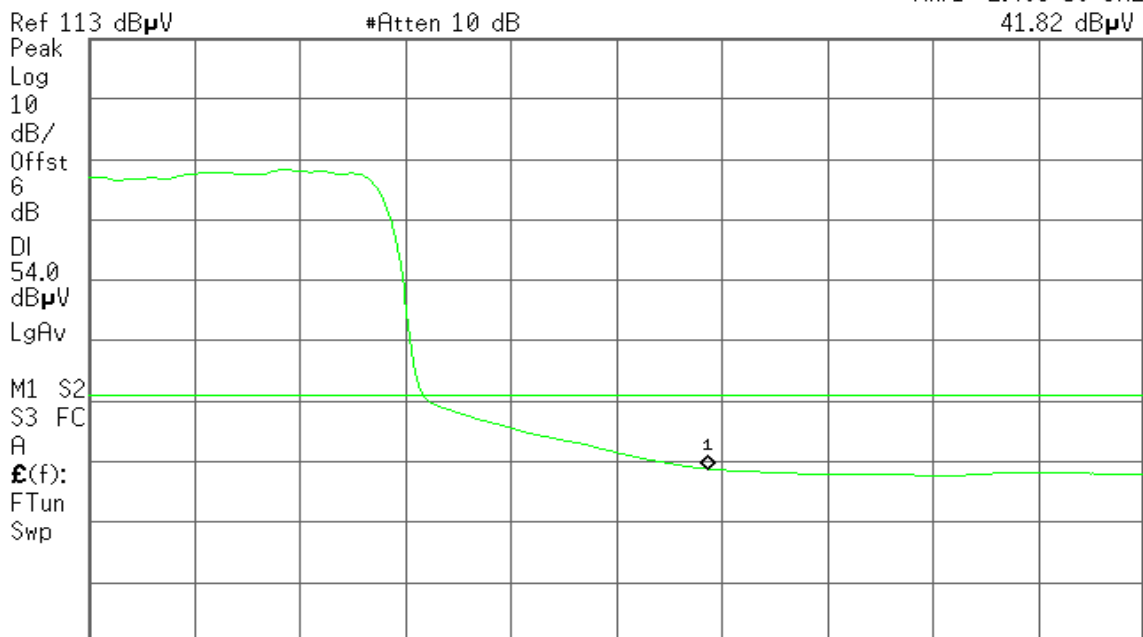



Detector mode: Peak

Polarity: Horizontal


Agilent

R T

Mkr1 2.483 50 GHz
52.72 dBμV

Ref 113 dBμV

#Atten 10 dB

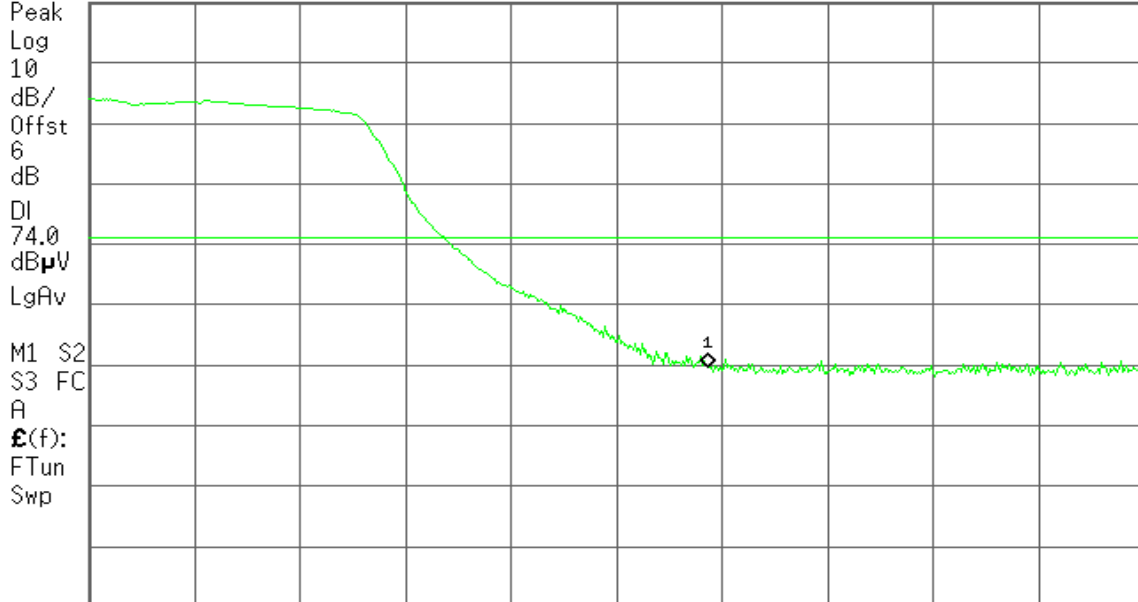

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal


Agilent

R T

Mkr1 2.483 50 GHz
40.67 dBμV

Ref 113 dBμV

#Atten 10 dB

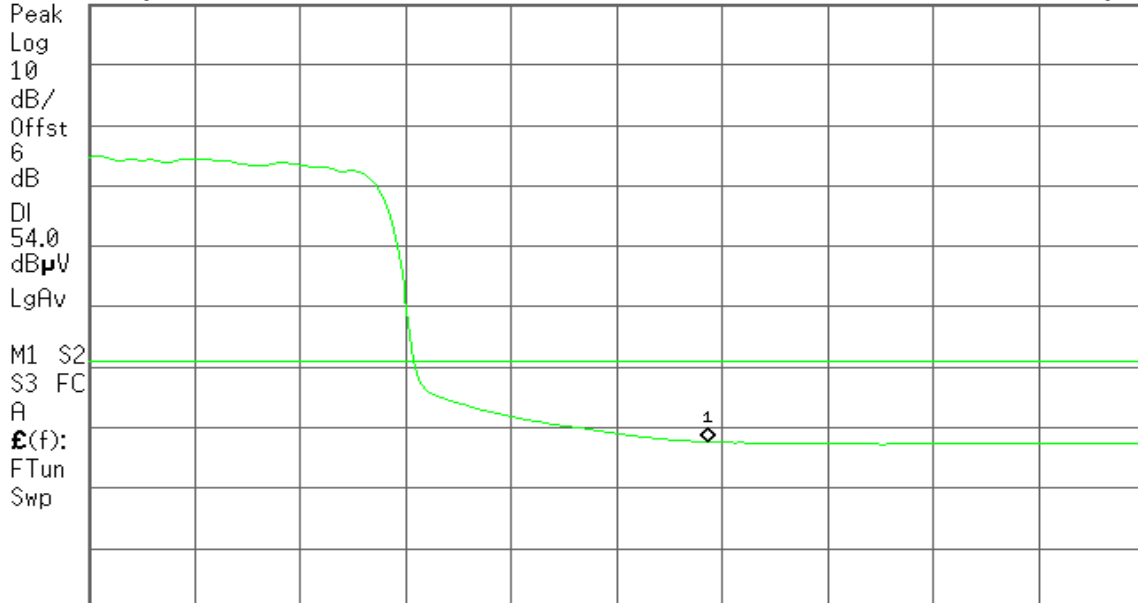

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)




Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent

R T

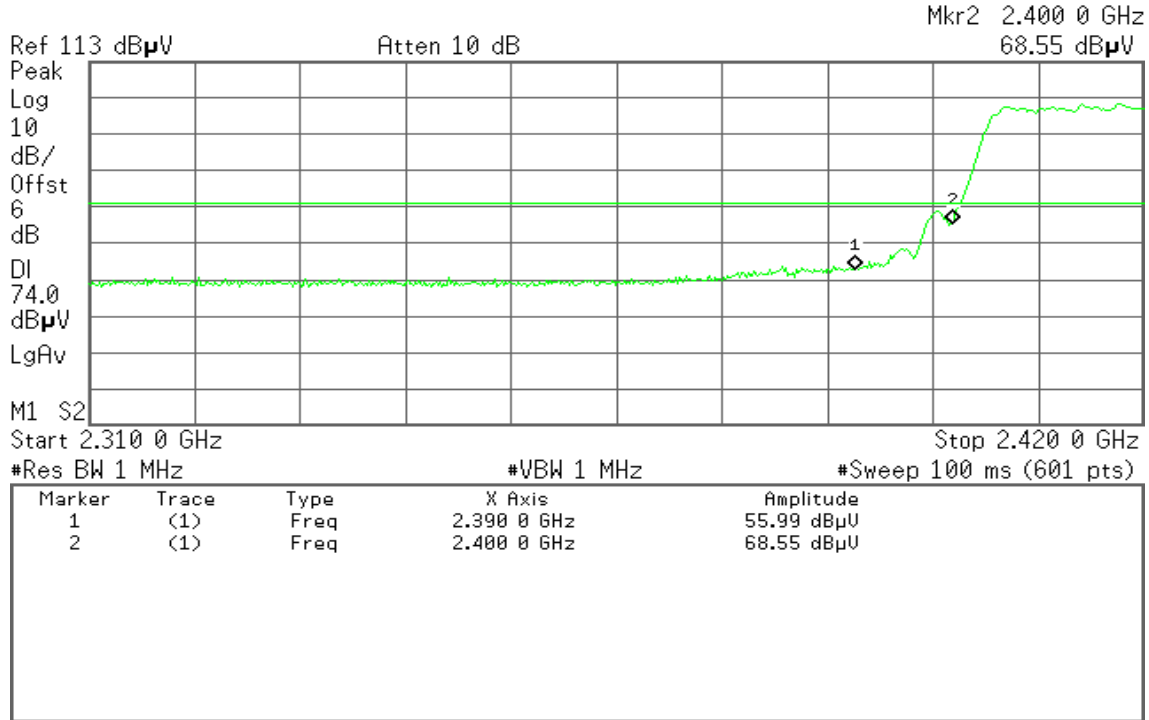


Detector mode: Average

Polarity: Vertical

Agilent

R T

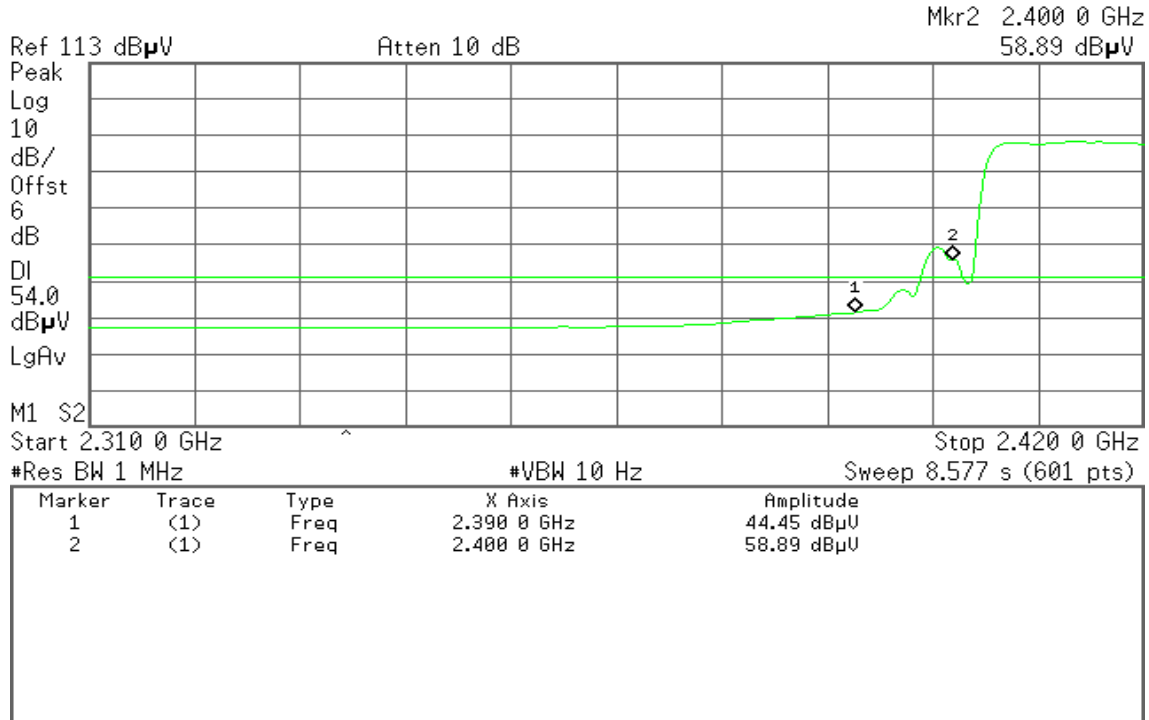




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

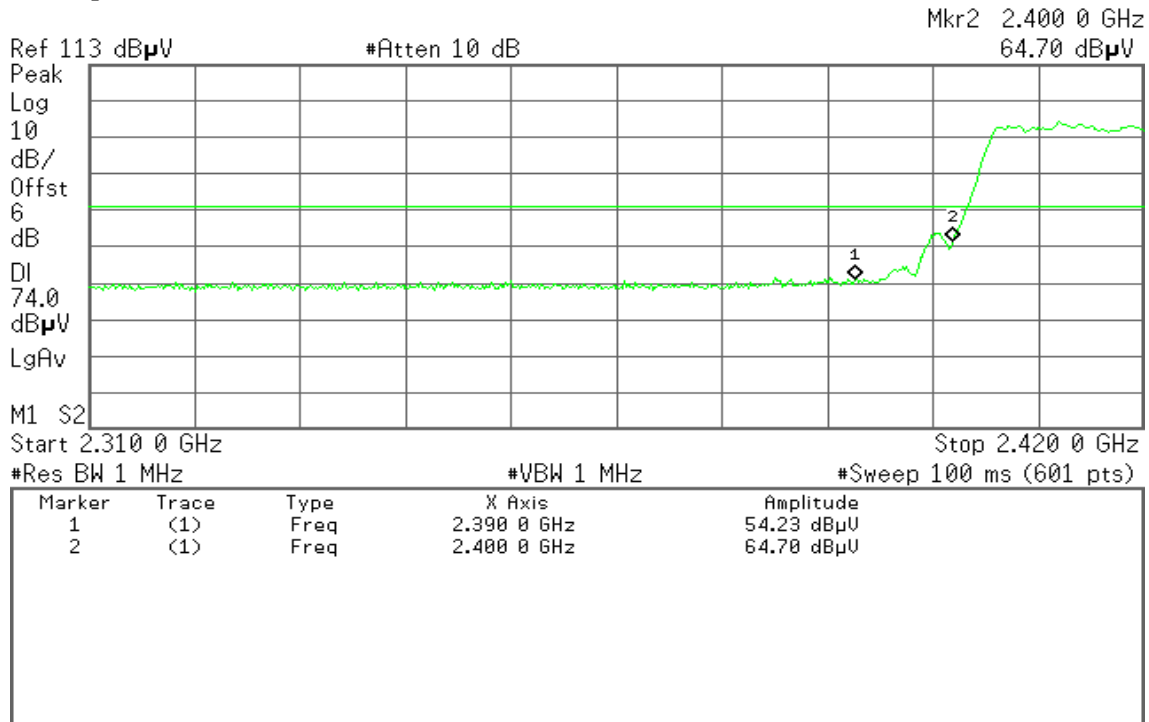


Detector mode: Average

Polarity: Horizontal

Agilent

R T

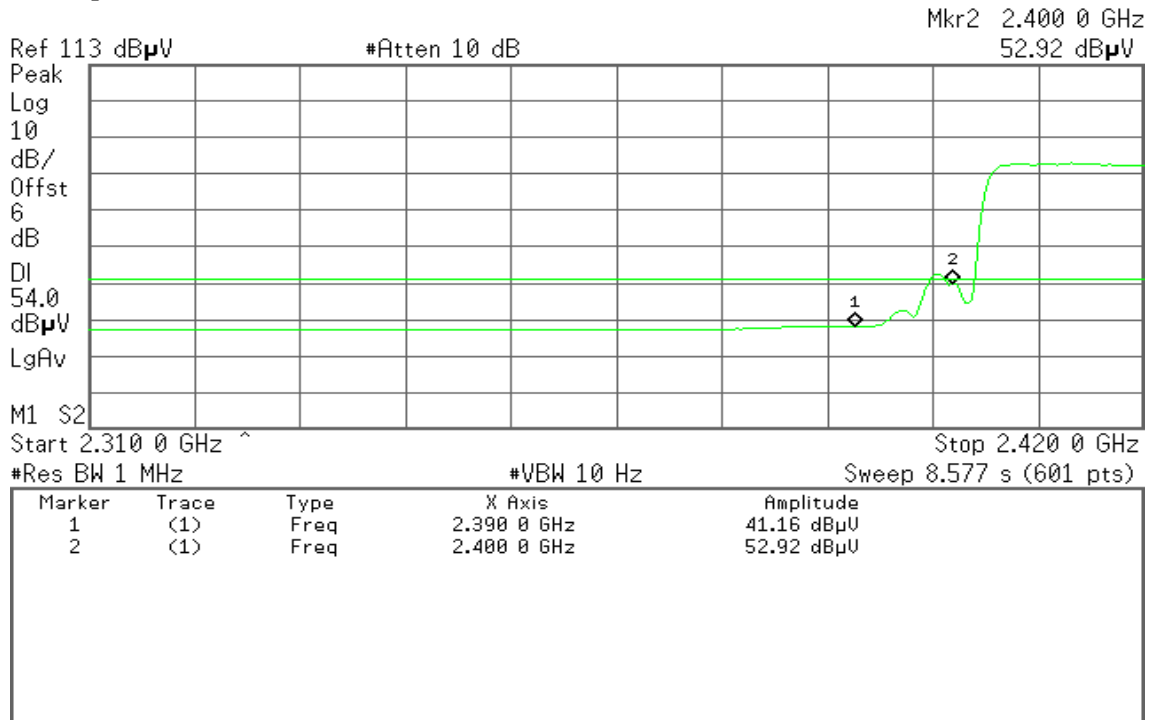



Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH High)

Detector mode: Peak

Polarity: Vertical


Agilent

R T

Mkr1 2.483 50 GHz
56.70 dBμV

Ref 113 dBμV

#Atten 10 dB

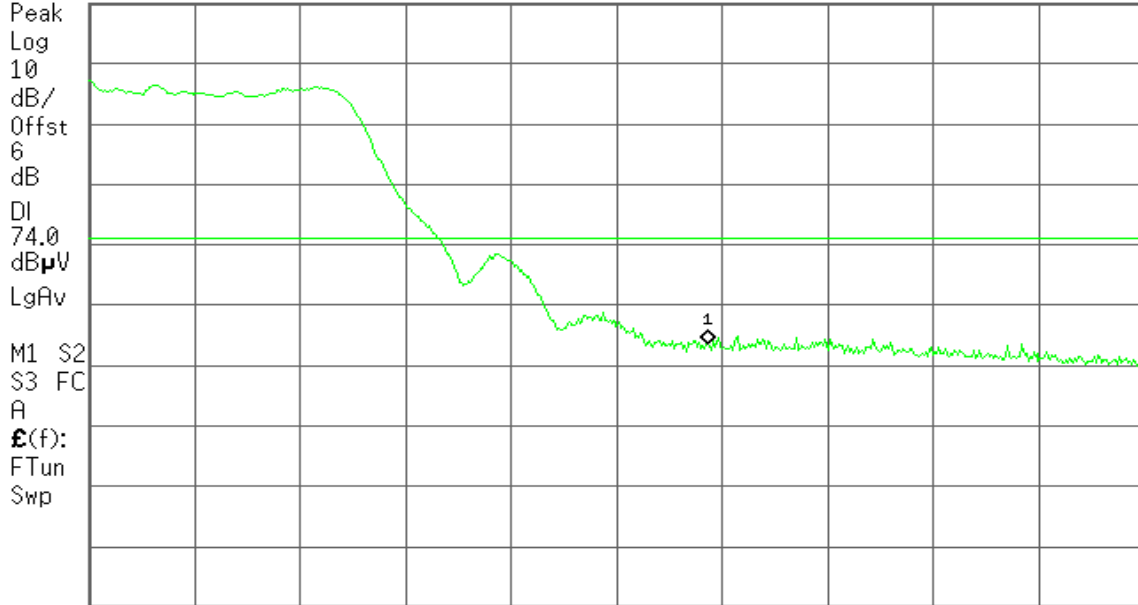

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Vertical


Agilent

R T

Mkr1 2.483 50 GHz
42.89 dBμV

Ref 113 dBμV

#Atten 10 dB

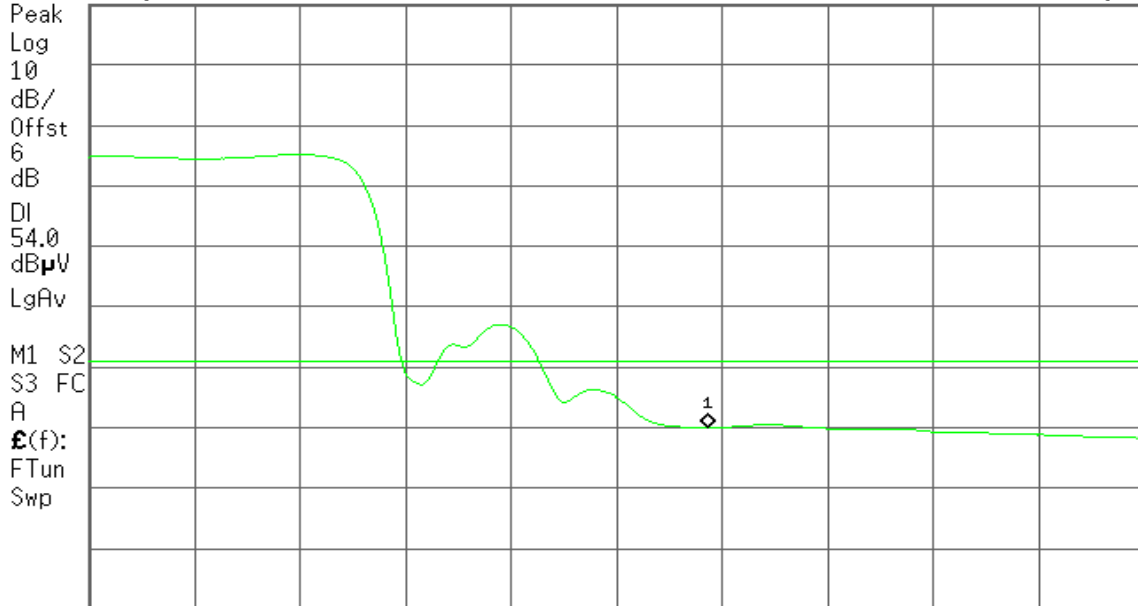

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

Mkr1 2.483 50 GHz
54.23 dBµV

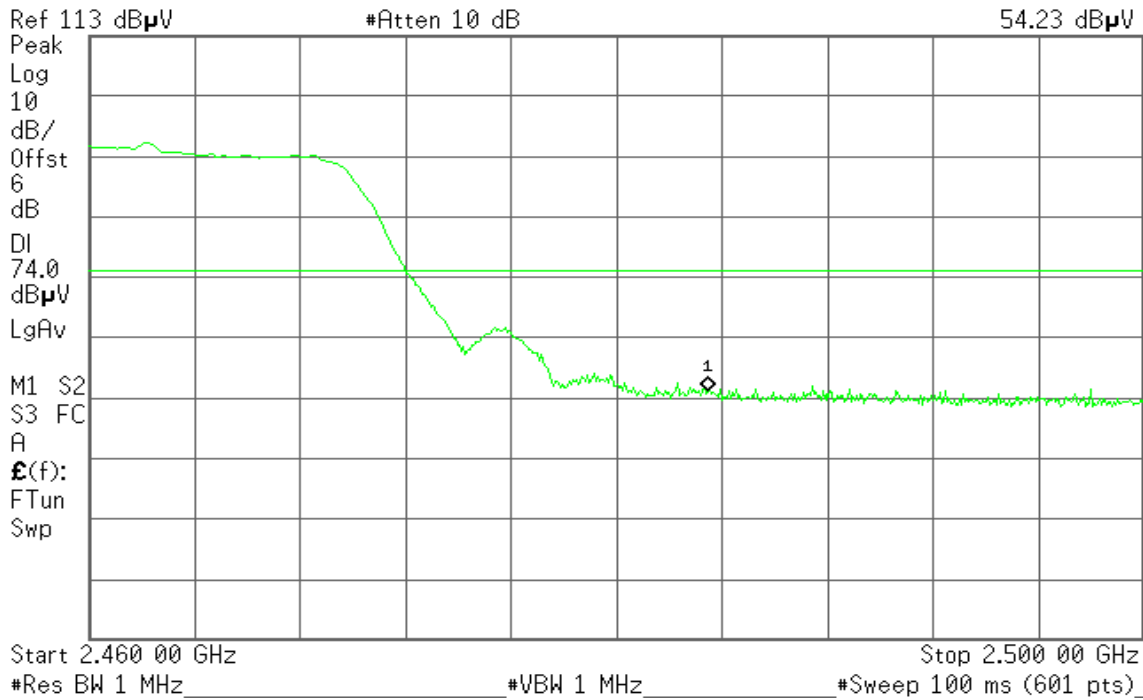


Detector mode: Average

Polarity: Horizontal

Agilent

R T

Mkr1 2.483 50 GHz
41.87 dBµV

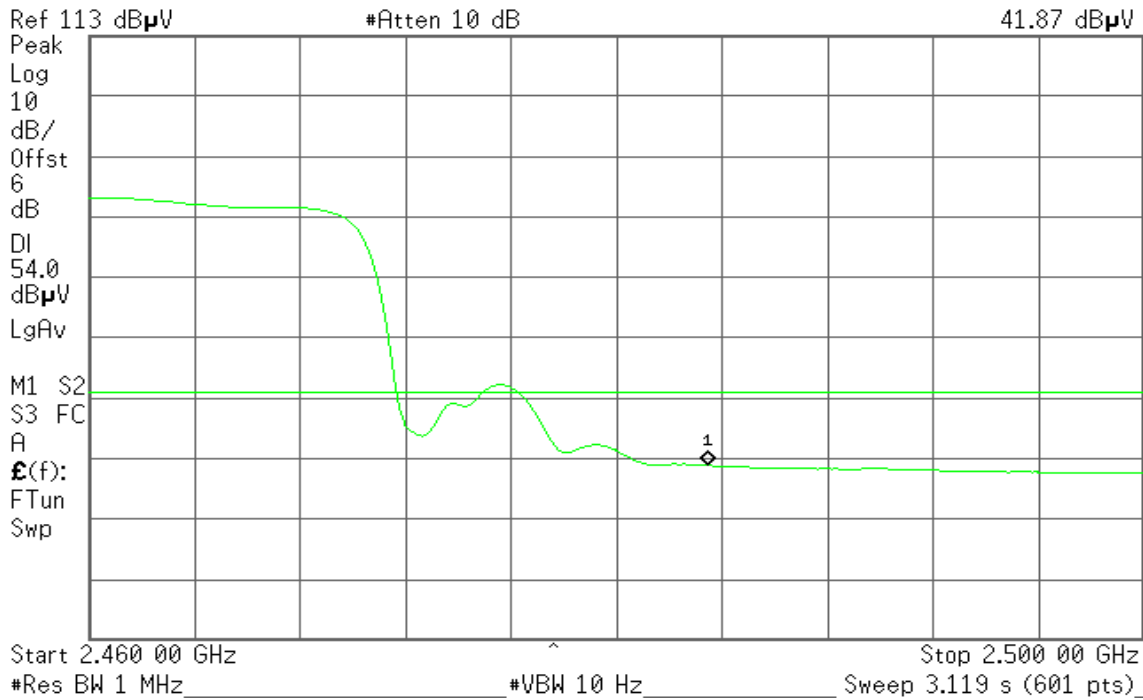


7.5 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 300 kHz, Sweep time = 100 s
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted



Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-14.53	8.00	PASS
Mid	2437	-13.59		PASS
High	2462	-12.31		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-14.32	8.00	PASS
Mid	2437	-13.69		PASS
High	2462	-13.05		PASS

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	Chain 1 PPSD (dBm)	Chain 2 PPSD (dBm)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-15.55	-22.77	-14.80	8.00	PASS
Mid	2437	-15.15	-23.41	-14.55		PASS
High	2462	-14.46	-23.70	-13.97		PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode

Channel	Frequency (MHz)	Chain 1 PPSD (dBm)	Chain 2 PPSD (dBm)	PPSD (dBm)	Limit (dBm)	Result
Low	2422	-15.64	-25.12	-15.18	8.00	PASS
Mid	2437	-15.07	-25.33	-14.68		PASS
High	2452	-14.75	-24.29	-14.29		PASS

Remark: Total PPSD (dBm) = 10*LOG(10^(Chain 1 PPSD / 10)+10^(Chain 2 PPSD / 10))



Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-16.86	8.00	PASS
Mid	2437	-16.07		PASS
High	2462	-15.33		PASS

Test mode: draft 802.11n Standard-40 MHz Channel mode


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-16.61	8.00	PASS
Mid	2437	-14.49		PASS
High	2462	-14.13		PASS




Test Plot

IEEE 802.11b mode

PPSD (CH Low)

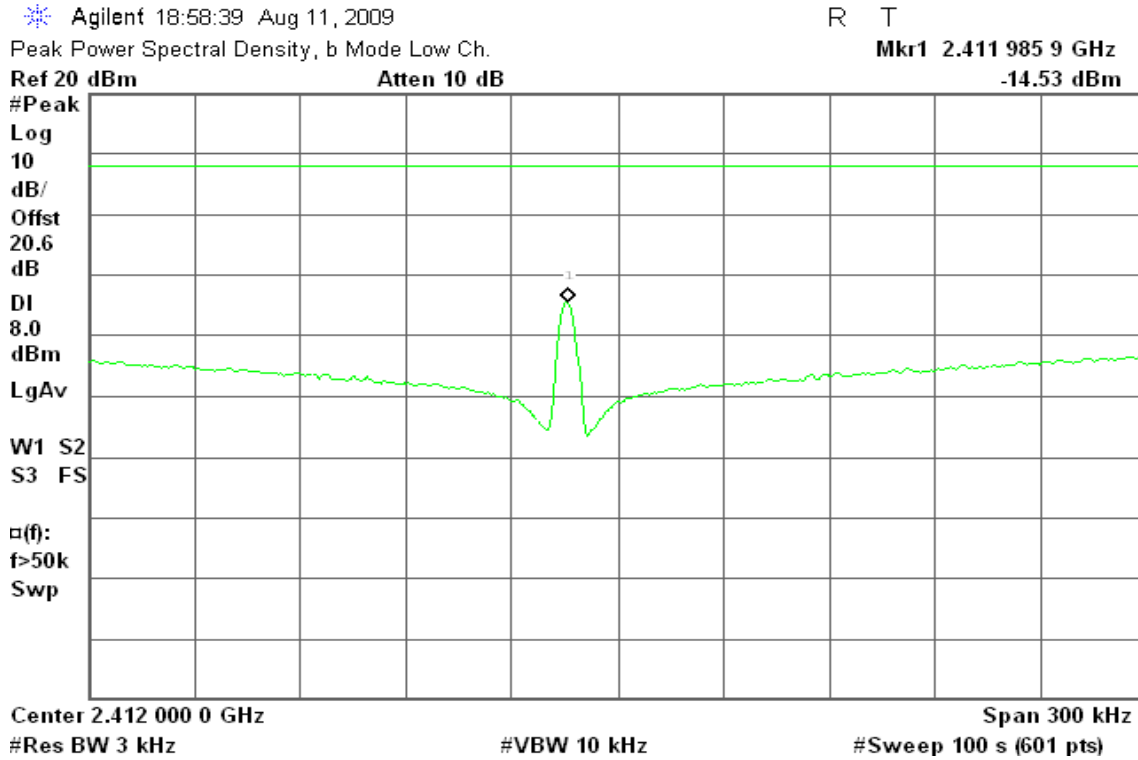

PPSD (CH Mid)

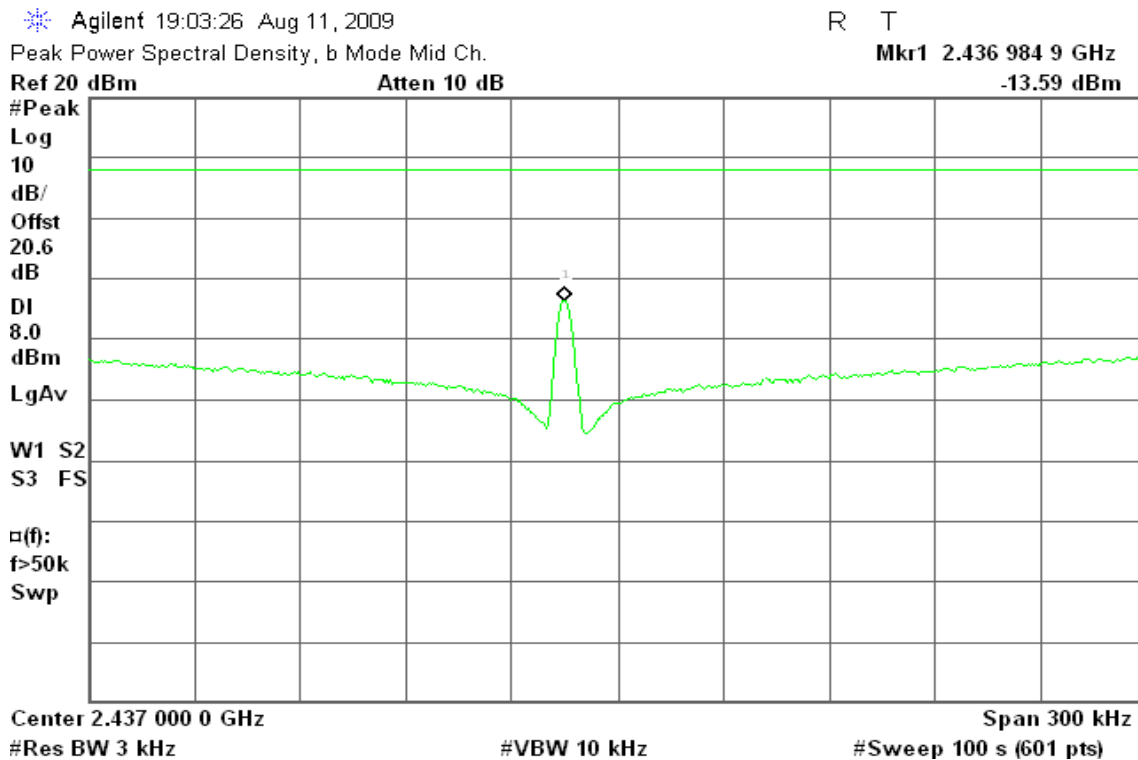



PPSD (CH High)

Agilent 19:34:17 Aug 11, 2009

R T


Peak Power Spectral Density, b Mode High Ch.

Mkr1 2.461 985 9 GHz

Ref 20 dBm

Atten 10 dB

-12.31 dBm

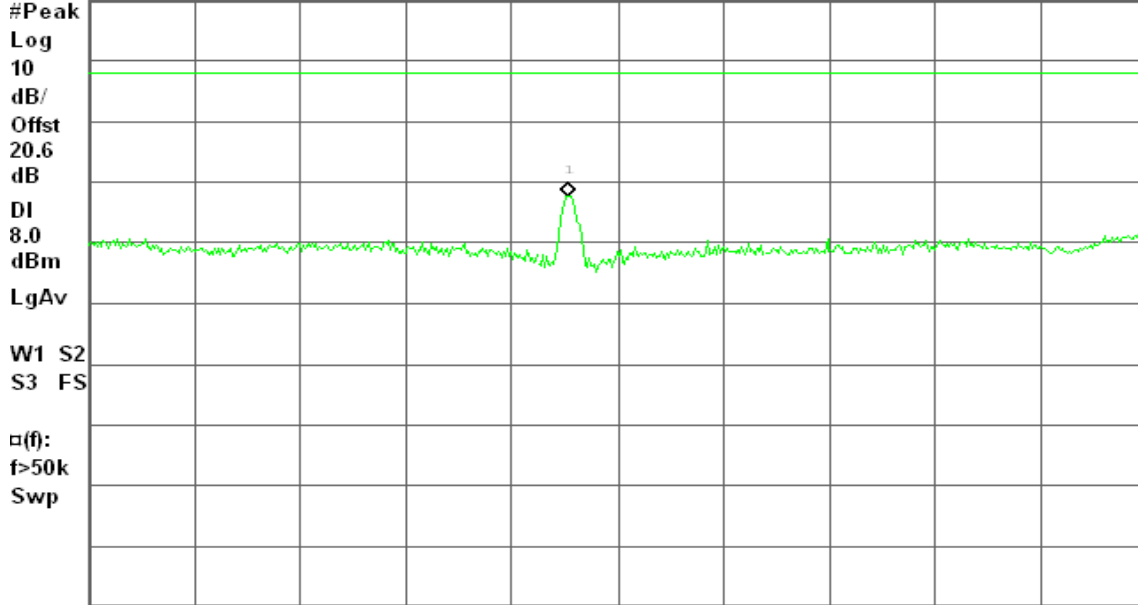

Center 2.462 000 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

IEEE 802.11g mode

PPSD (CH Low)

Agilent 20:01:04 Aug 11, 2009

R T


Peak Power Spectral Density, g Mode Low Ch.

Mkr1 2.411 985 4 GHz

Ref 20 dBm

Atten 10 dB

-14.32 dBm

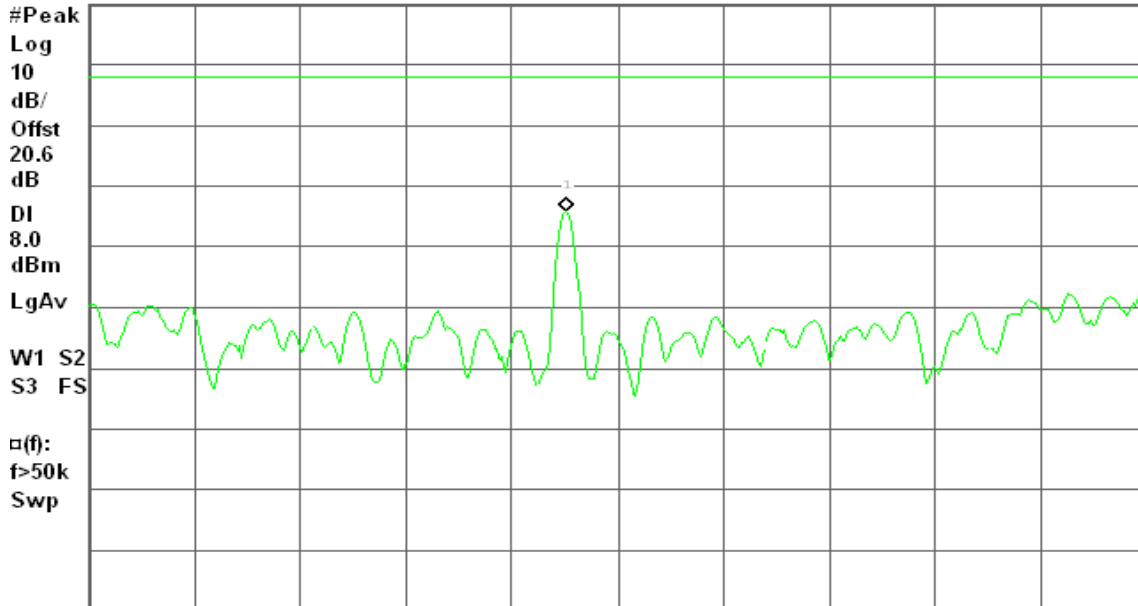

Center 2.412 000 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)



PPSD (CH Mid)

Agilent 20:05:14 Aug 11, 2009

R T


Peak Power Spectral Density, g Mode Mid Ch.

Mkr1 2.436 984 4 GHz

Ref 20 dBm

Atten 10 dB

-13.69 dBm

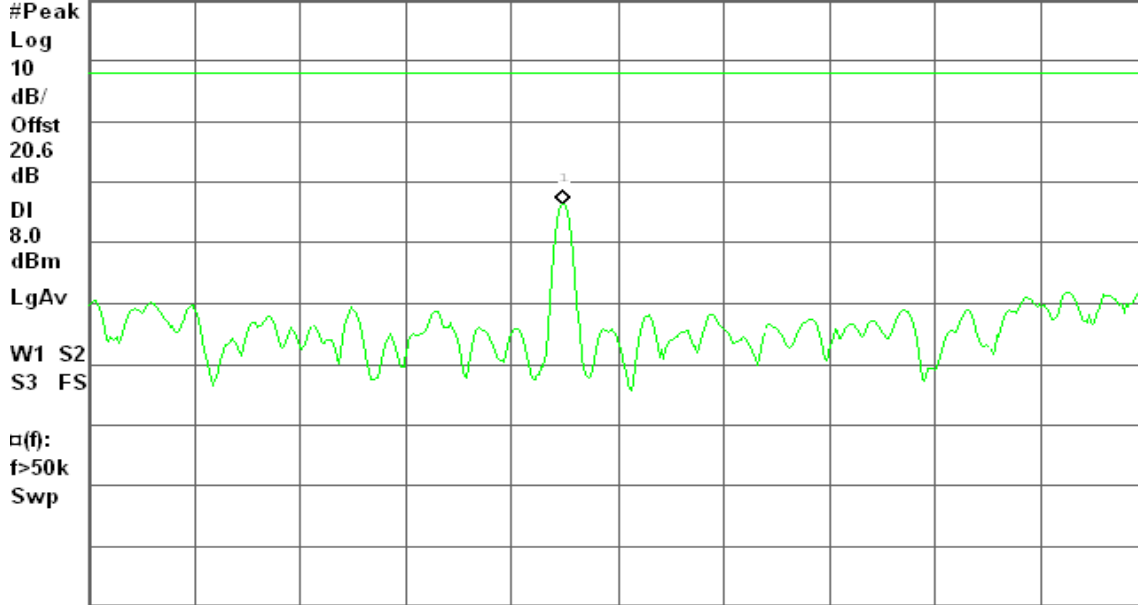

Center 2.437 000 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

PPSD (CH High)

Agilent 20:13:54 Aug 11, 2009

R T


Peak Power Spectral Density, g Mode High Ch.

Mkr1 2.461 984 4 GHz

Ref 20 dBm

Atten 10 dB

-13.05 dBm

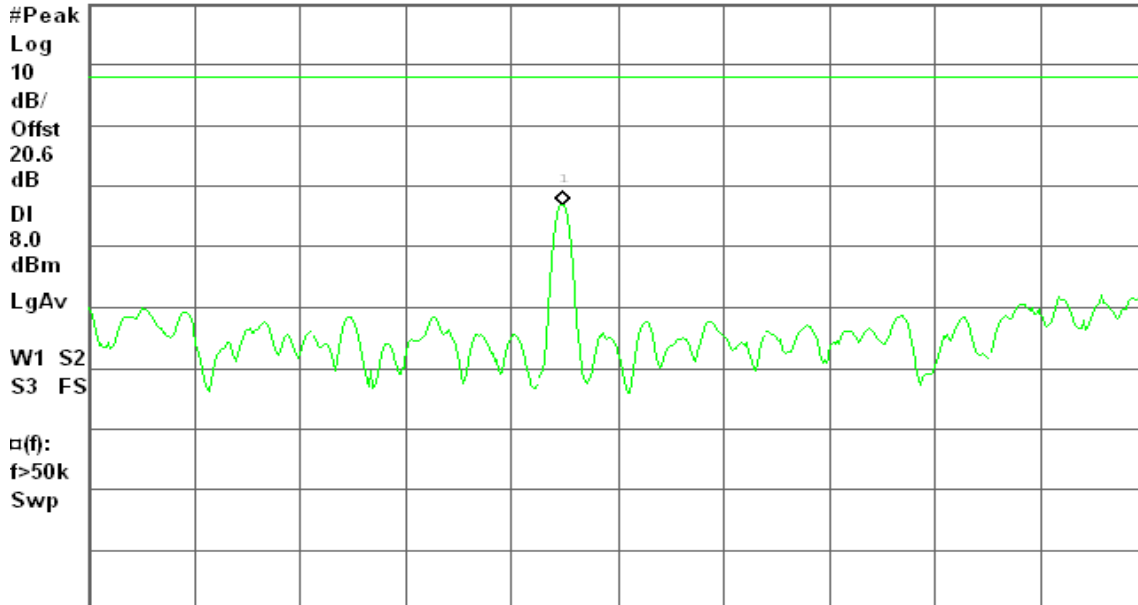

Center 2.462 000 0 GHz

Span 300 kHz

#Res BW 3 kHz


#VBW 10 kHz

#Sweep 100 s (601 pts)




draft 802.11n Standard-20 MHz Channel mode / Chain 1

PPSD (CH Low)

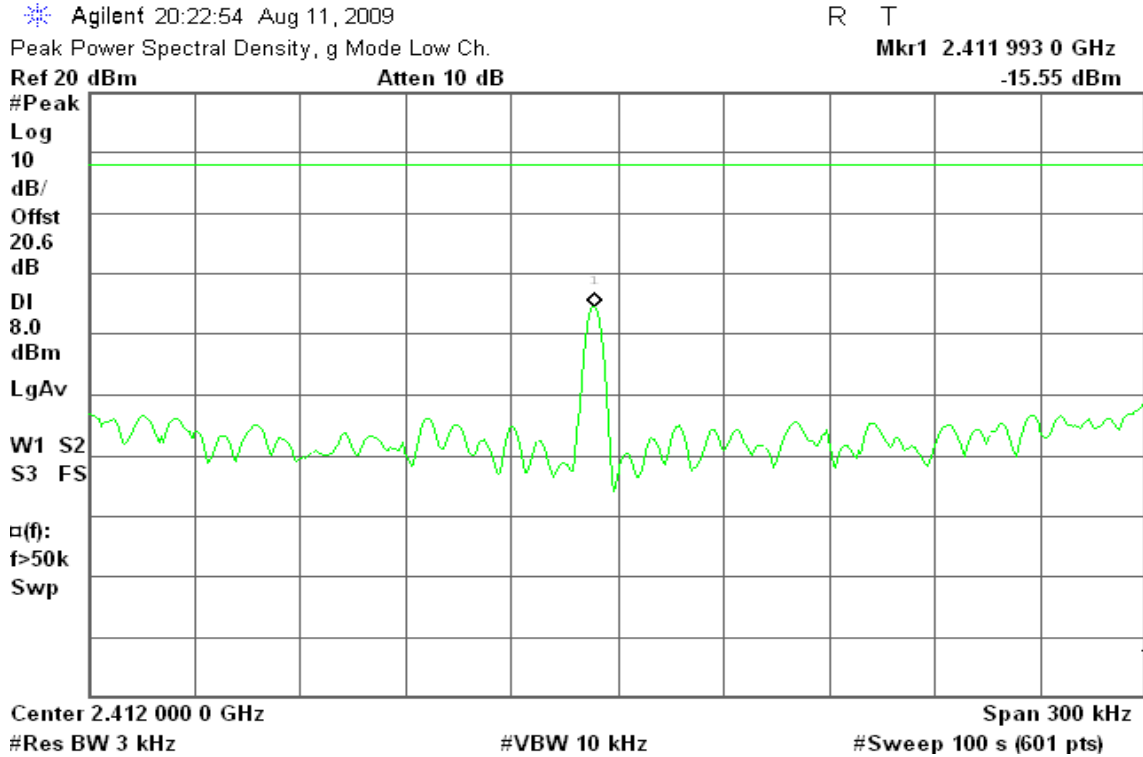

PPSD (CH Mid)

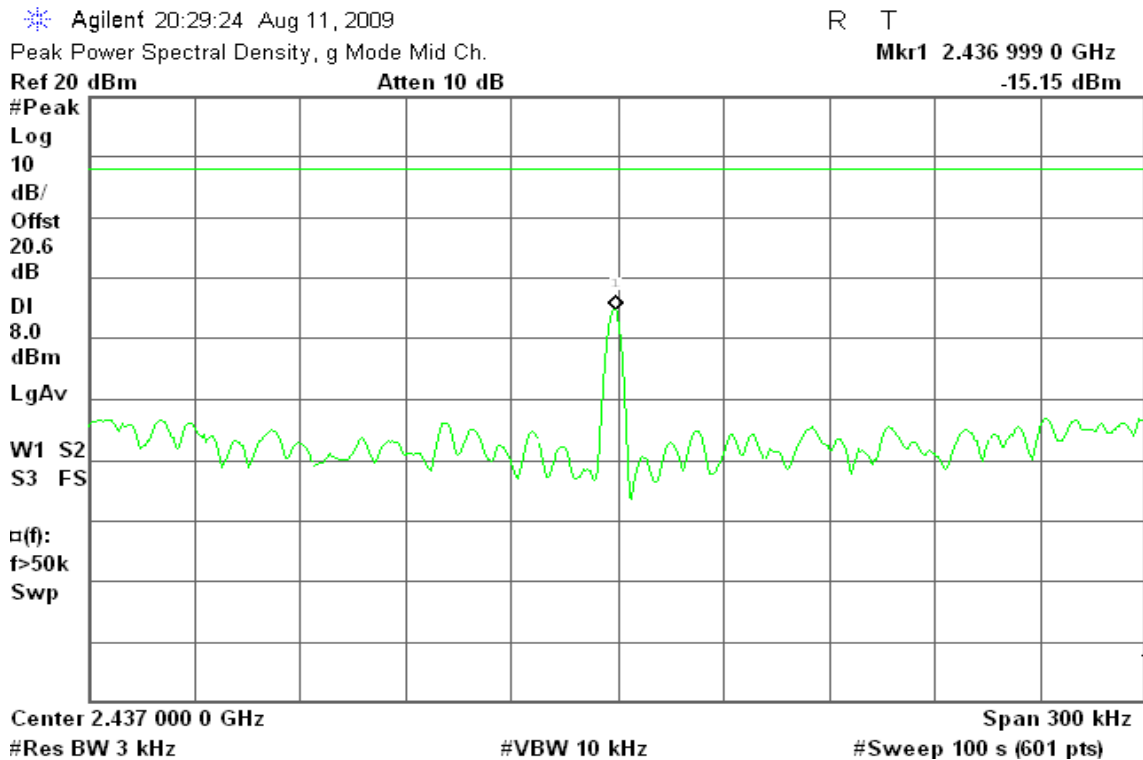



PPSD (CH High)

Agilent 20:33:36 Aug 11, 2009

R T


Peak Power Spectral Density, g Mode High Ch.

Mkr1 2.461 999 5 GHz

Ref 20 dBm

Atten 10 dB

-14.46 dBm

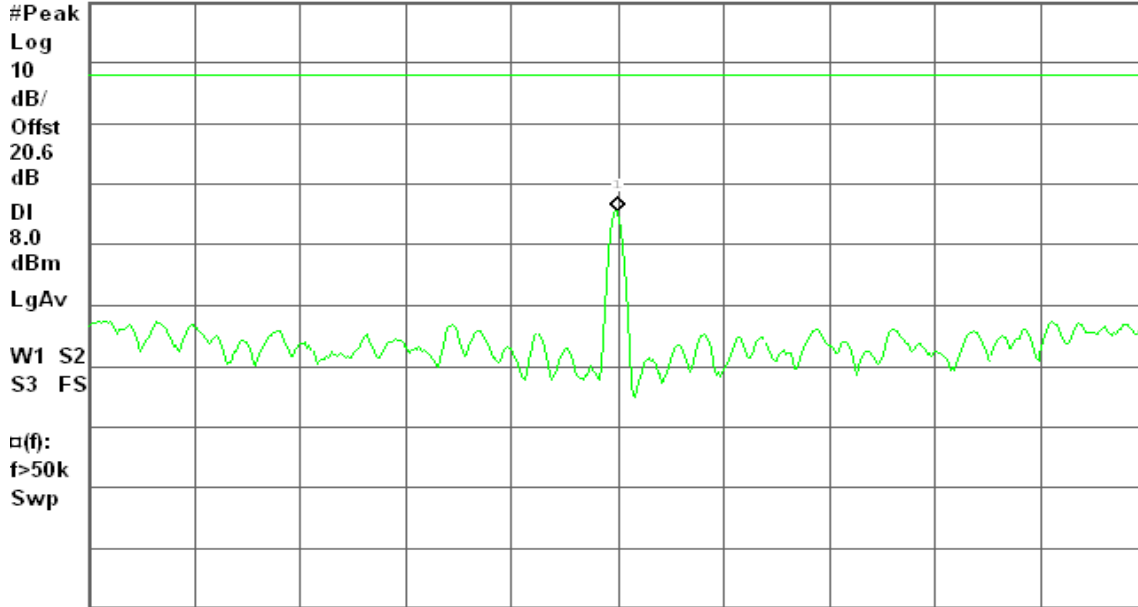

Center 2.462 000 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

draft 802.11n Standard-20 MHz Channel mode / Chain 2

PPSD (CH Low)

Agilent 21:44:00 Aug 11, 2009

R T


Peak Power Spectral Density, g Mode Low Ch.

Mkr1 2.414 169 6 GHz

Ref 20 dBm

Atten 10 dB

-22.77 dBm

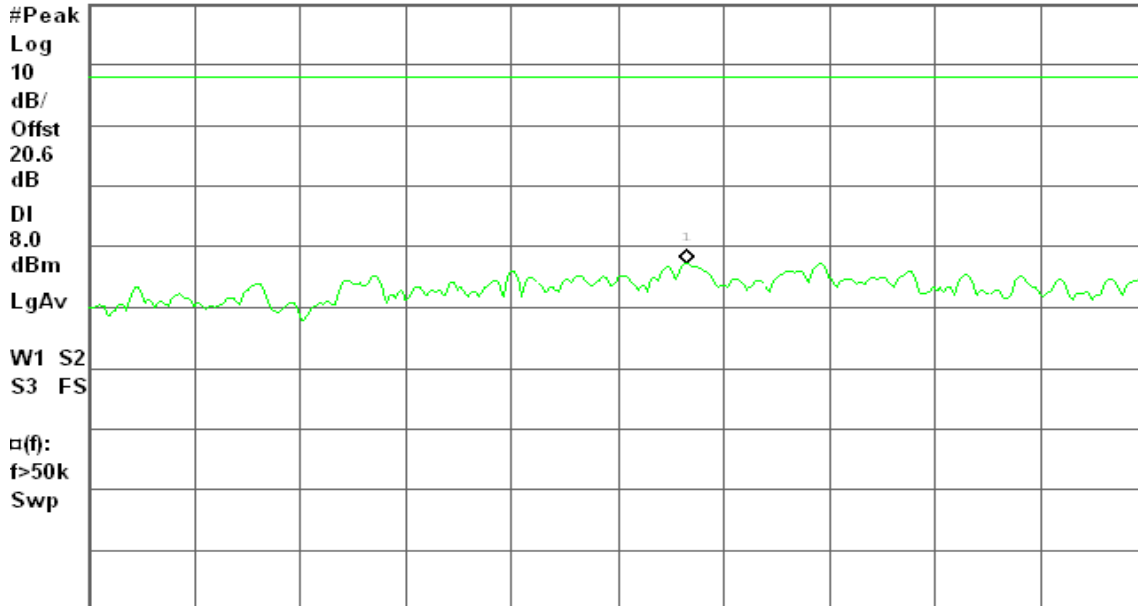

Center 2.414 150 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)



PPSD (CH Mid)

Agilent 21:48:06 Aug 11, 2009

R T


Peak Power Spectral Density, g Mode Mid Ch.

Mkr1 2.439 209 0 GHz

Ref 20 dBm

Atten 10 dB

-23.41 dBm

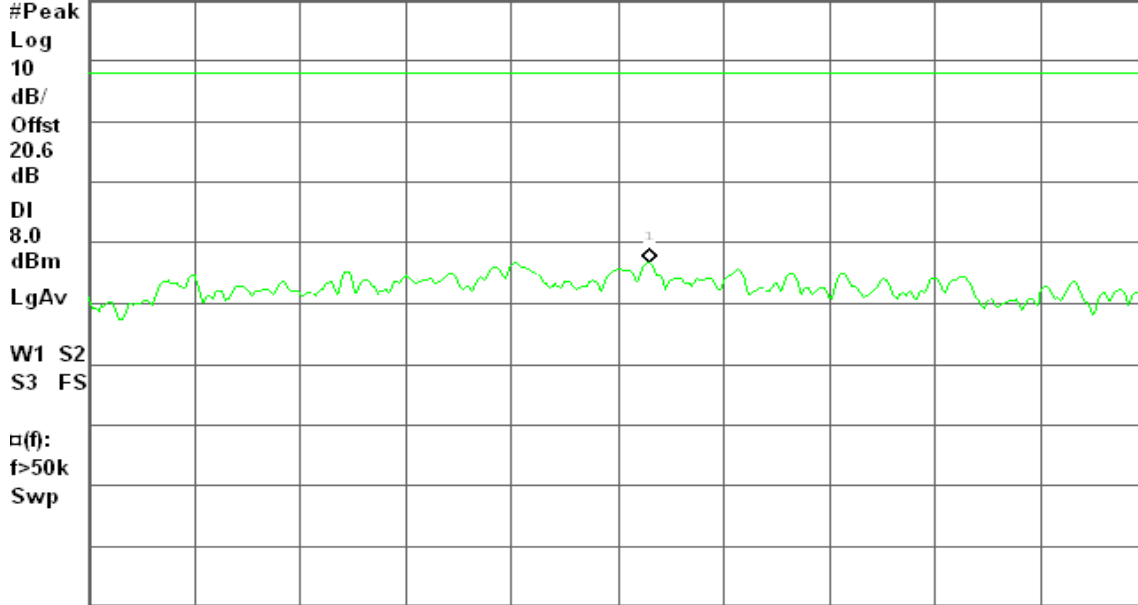

Center 2.439 200 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

PPSD (CH High)

Agilent 21:59:41 Aug 11, 2009

R T


Peak Power Spectral Density, g Mode High Ch.

Mkr1 2.464 170 6 GHz

Ref 20 dBm

Atten 10 dB

-23.70 dBm

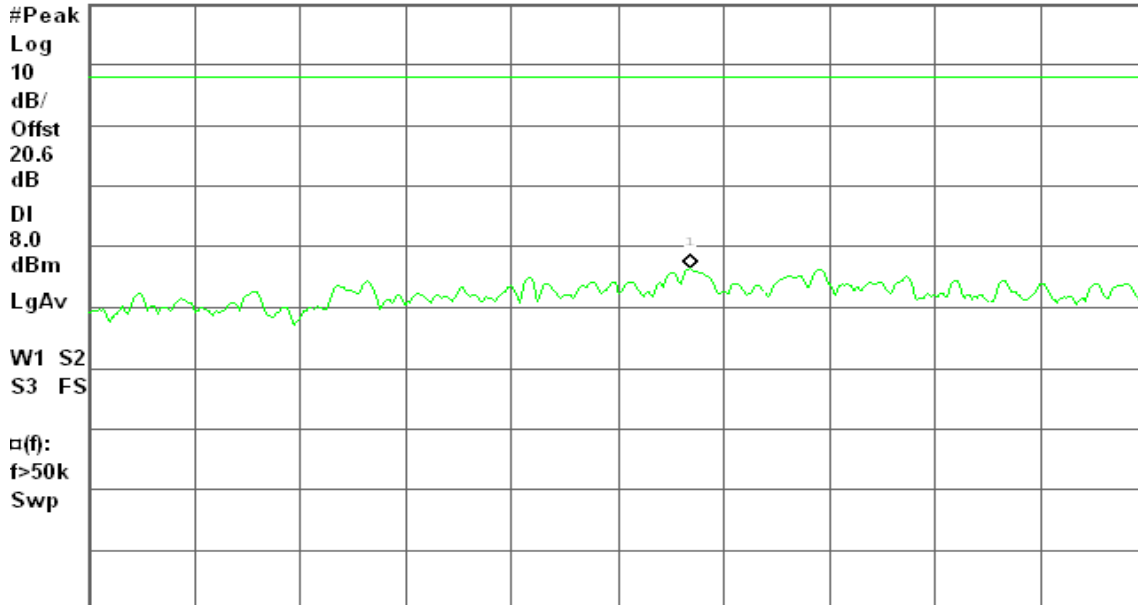

Center 2.464 150 0 GHz

Span 300 kHz

#Res BW 3 kHz


#VBW 10 kHz

#Sweep 100 s (601 pts)




draft 802.11n Wide-20 MHz Channel mode / Combiner

PPSD (CH Low)

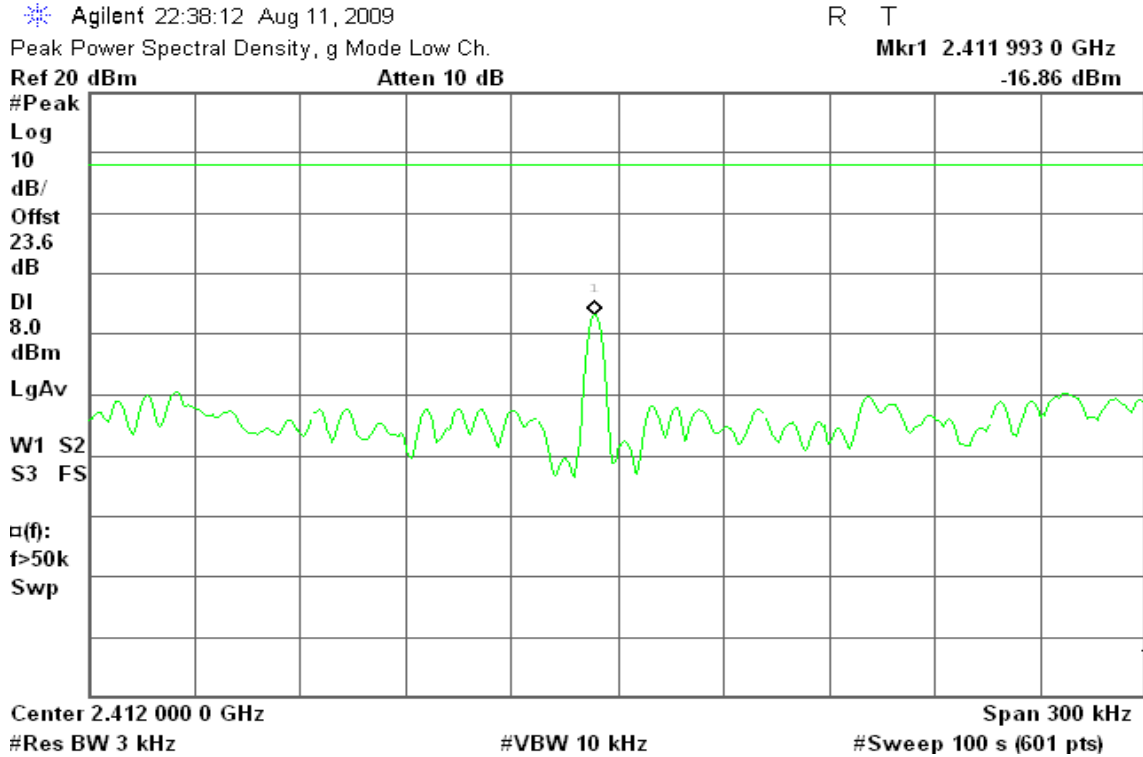

PPSD (CH Mid)

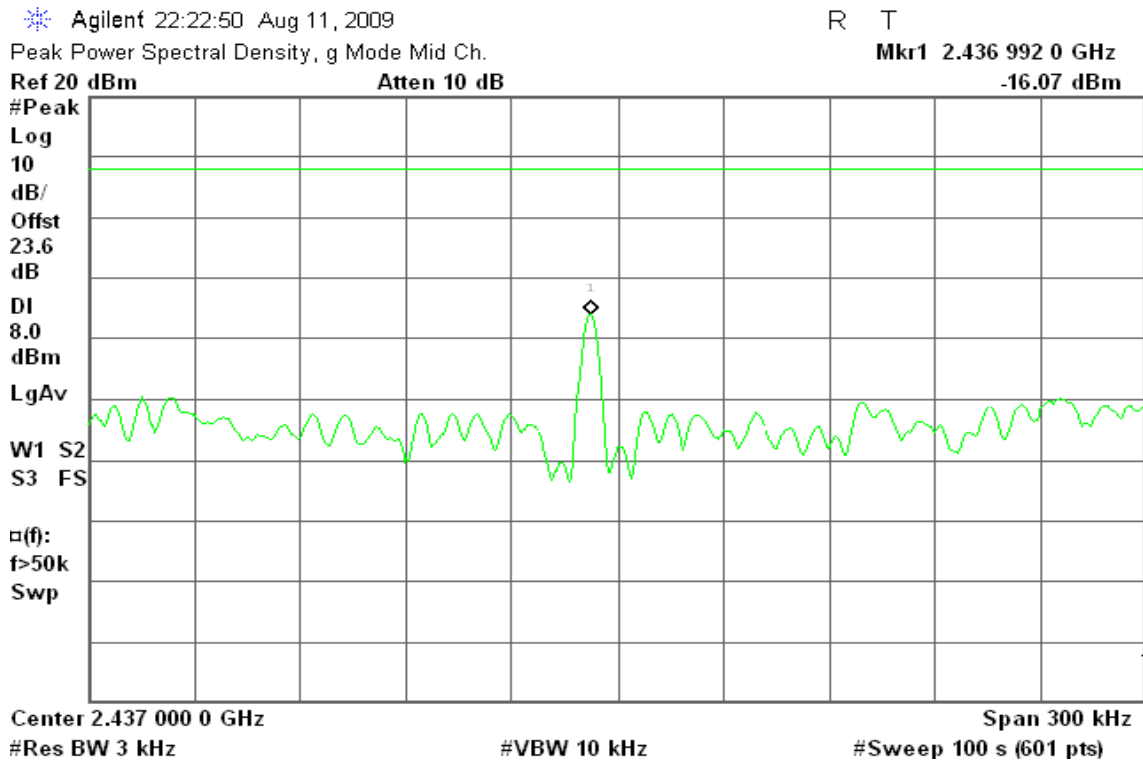



PPSD (CH High)

Agilent 22:13:30 Aug 11, 2009

R L


Peak Power Spectral Density, g Mode High Ch.

Mkr1 2.461 994 5 GHz

Ref 20 dBm

Atten 10 dB

-15.33 dBm

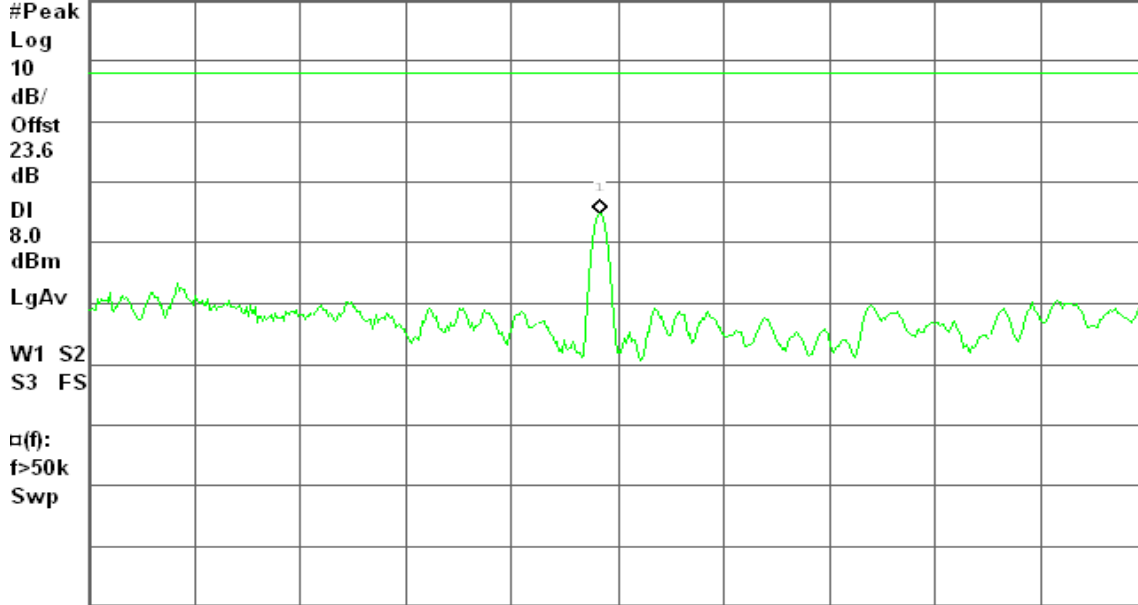

Center 2.462 000 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

draft 802.11n Wide-40 MHz Channel mode / Chain 1

PPSD (CH Low)

Agilent 20:46:54 Aug 11, 2009

R T


Peak Power Spectral Density, g Mode Low Ch.

Mkr1 2.422 000 0 GHz

Ref 20 dBm

Atten 10 dB

-15.64 dBm

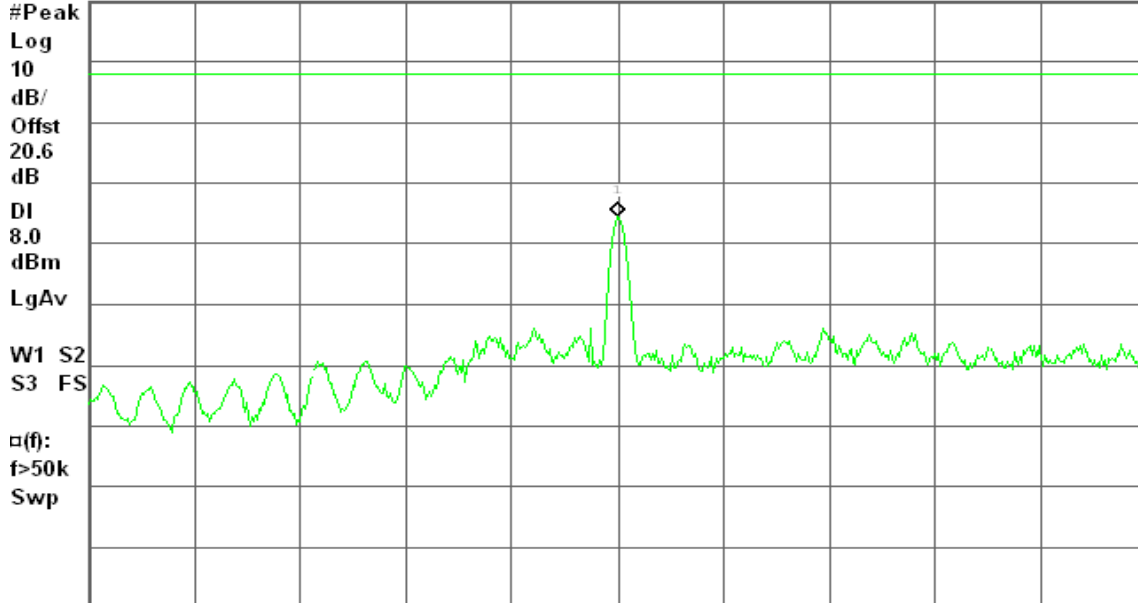

Center 2.422 000 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)



PPSD (CH Mid)

Agilent 20:51:11 Aug 11, 2009

R T


Peak Power Spectral Density, g Mode Mid Ch.

Mkr1 2.436 997 5 GHz

Ref 20 dBm

Atten 10 dB

-15.07 dBm

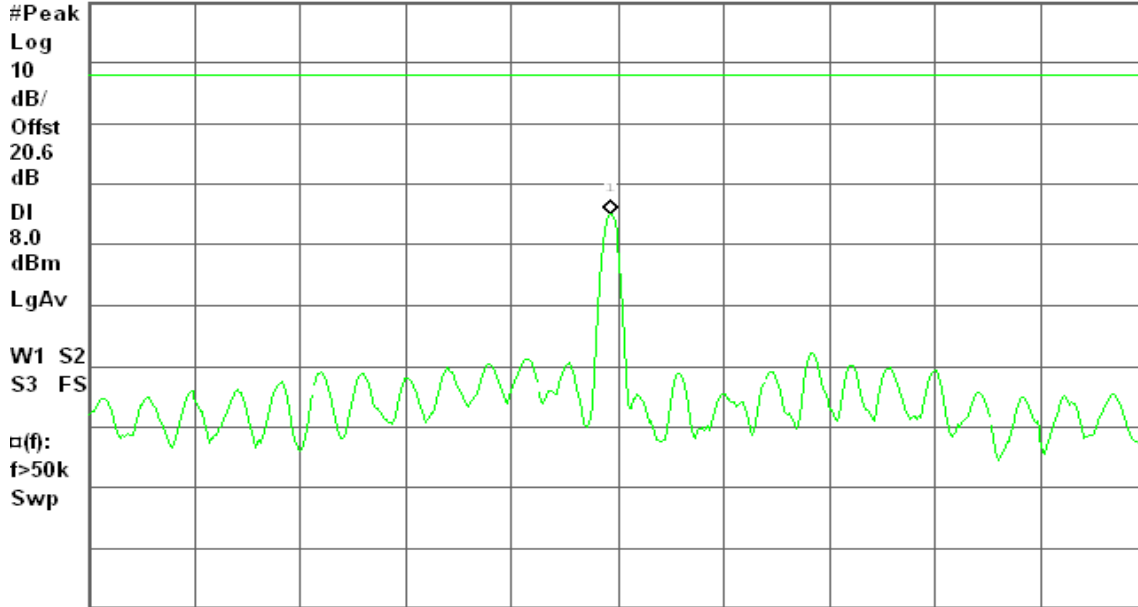

Center 2.437 000 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

PPSD (CH High)

Agilent 20:55:29 Aug 11, 2009

R T


Peak Power Spectral Density, g Mode High Ch.

Mkr1 2.452 002 0 GHz

Ref 20 dBm

Atten 10 dB

-14.75 dBm

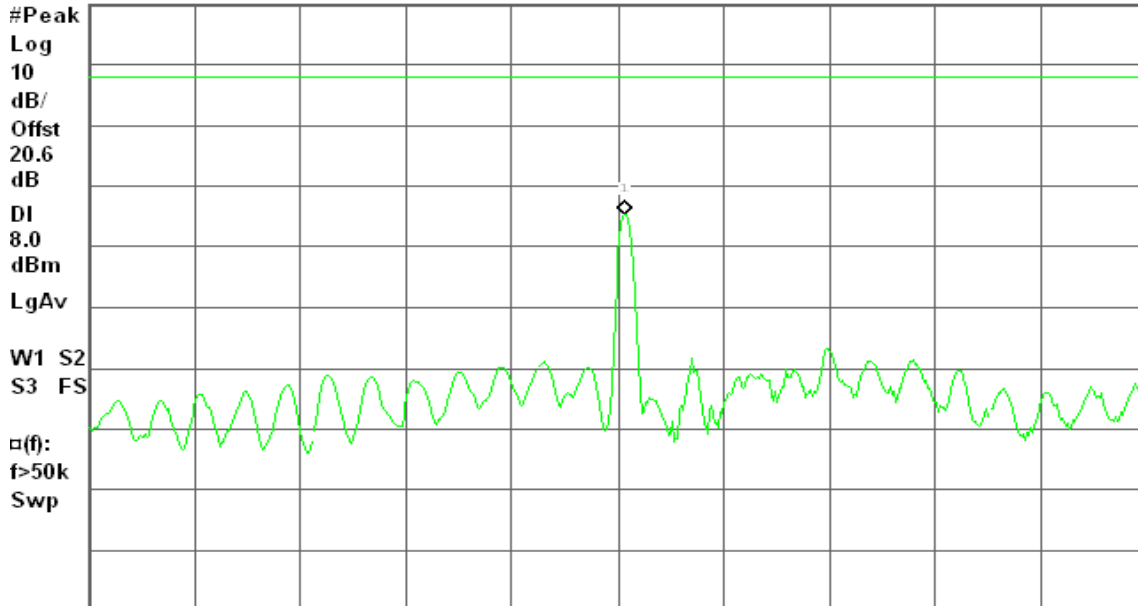

Center 2.452 000 0 GHz

Span 300 kHz

#Res BW 3 kHz


#VBW 10 kHz

#Sweep 100 s (601 pts)




draft 802.11n Wide-40 MHz Channel mode / Chain 2

PPSD (CH Low)

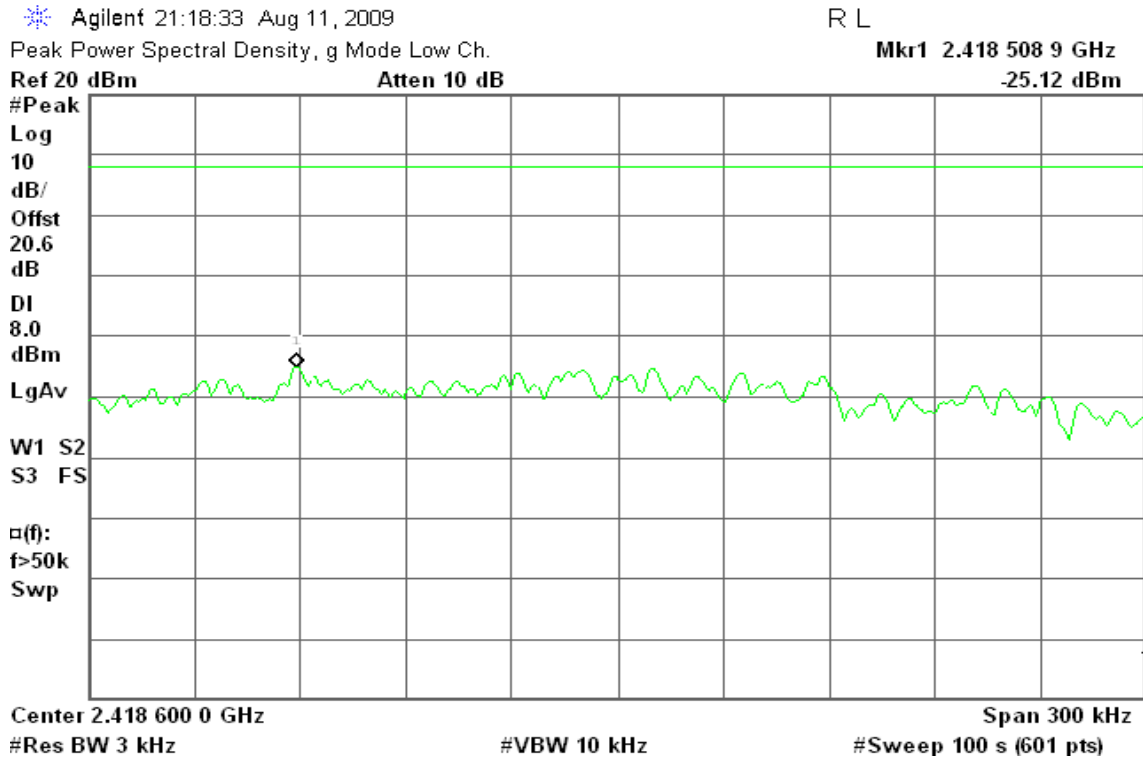


PPSD (CH Mid)

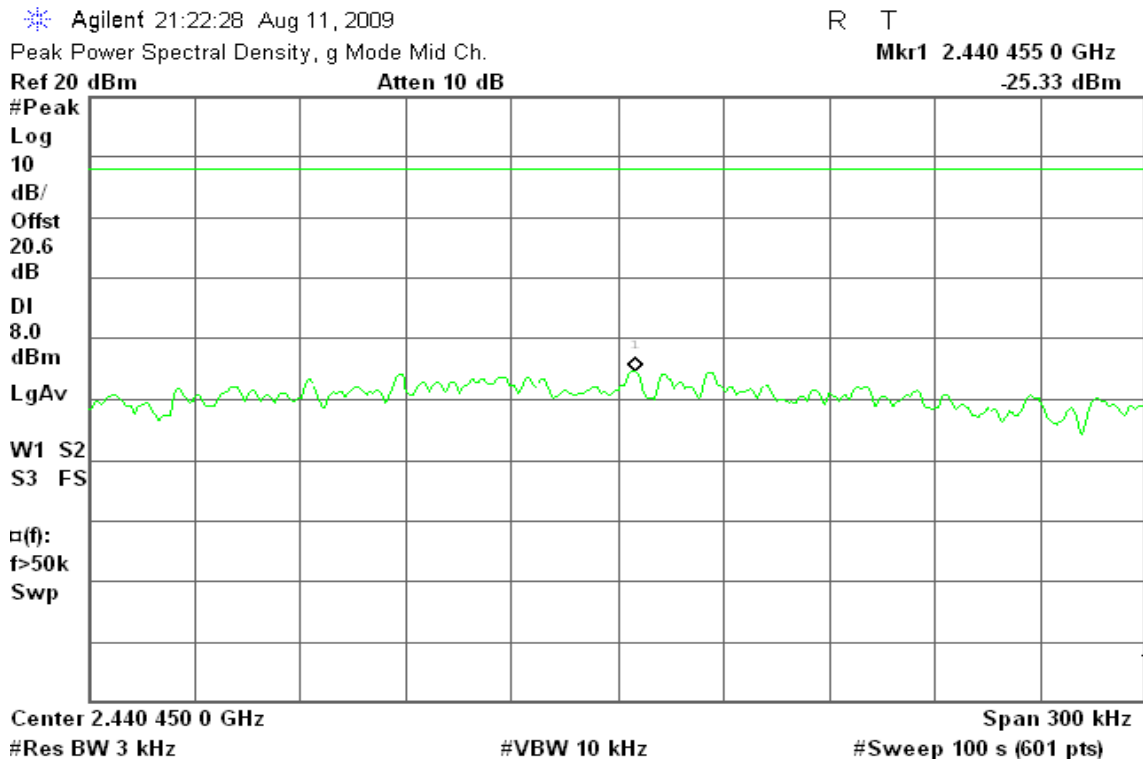




PPSD (CH High)

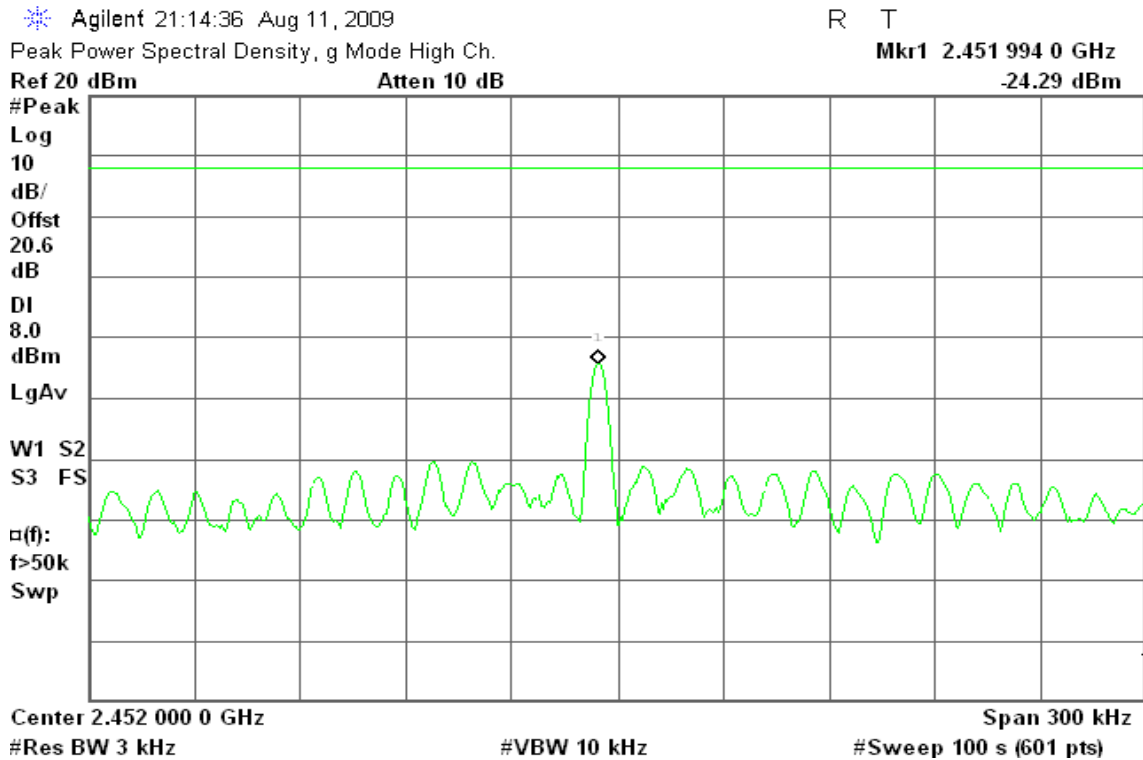

draft 802.11n Wide-40 MHz Channel mode / Combiner

PPSD (CH Low)

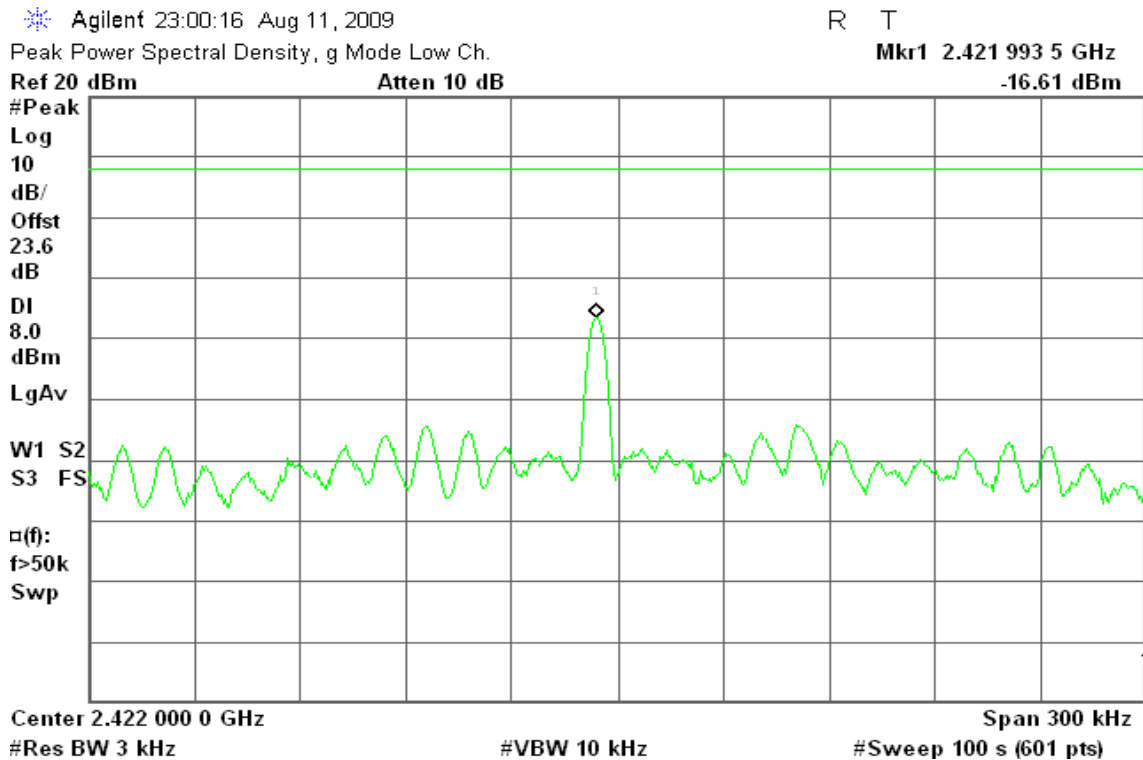



PPSD (CH Mid)

Agilent 23:04:14 Aug 11, 2009

R T


Peak Power Spectral Density, g Mode Mid Ch.

Mkr1 2.436 993 0 GHz

Ref 20 dBm

Atten 10 dB

-14.49 dBm

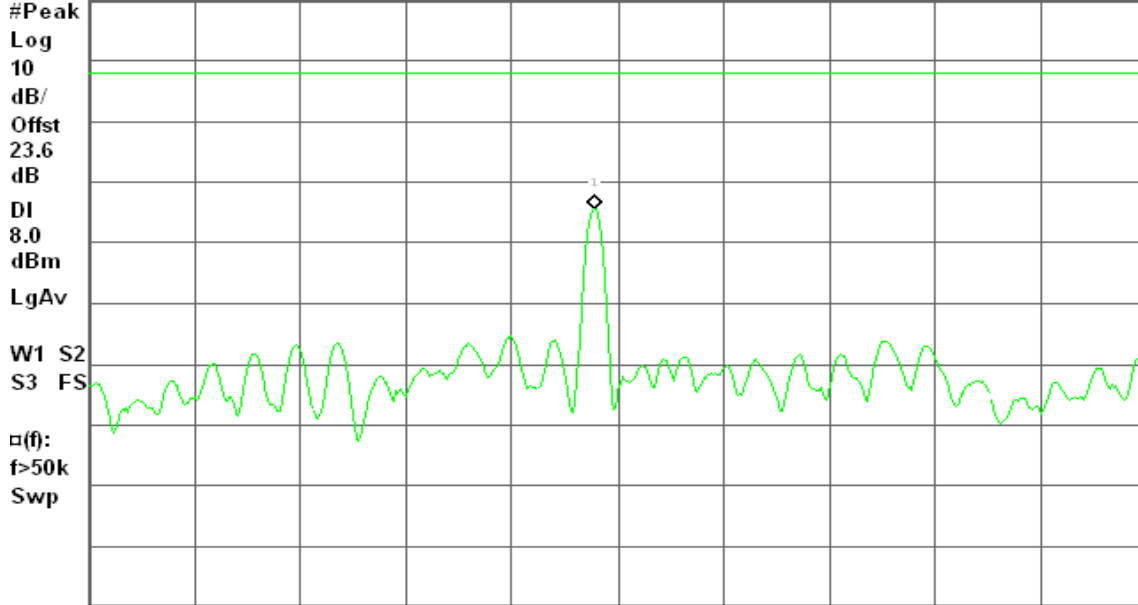

Center 2.437 000 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

PPSD (CH High)

Agilent 23:07:38 Aug 11, 2009

R L


Peak Power Spectral Density, g Mode High Ch.

Mkr1 2.451 995 5 GHz

Ref 20 dBm

Atten 10 dB

-14.13 dBm

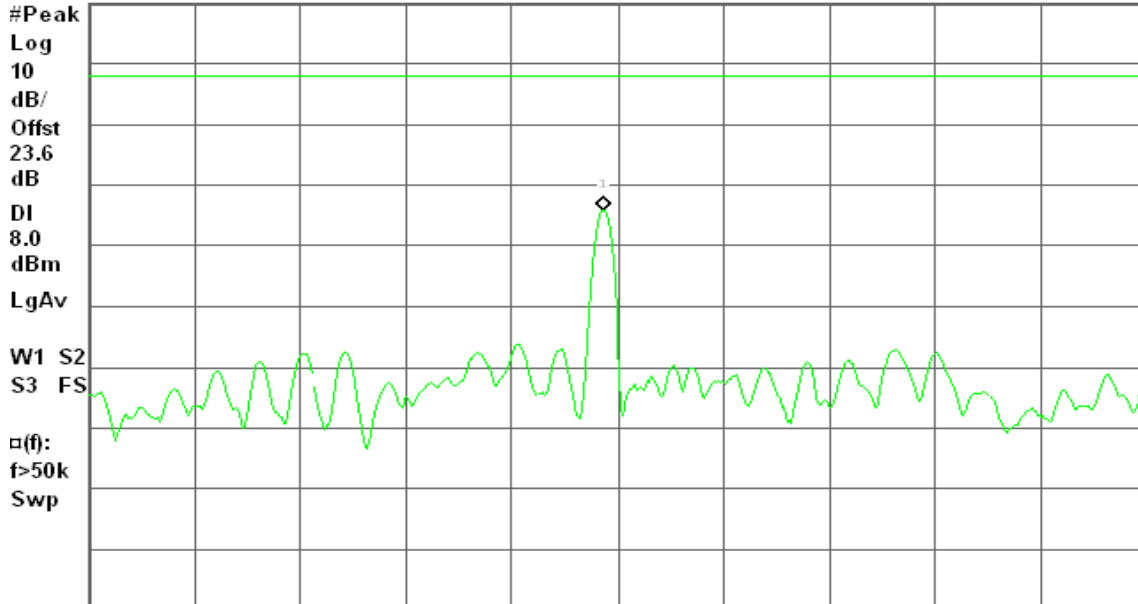

Center 2.452 000 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)


7.6 SPURIOUS EMISSIONS

7.6.1 CONDUCTED MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted.



Test Plot

IEEE 802.11b mode

CH Low

Agilent 18:59:18 Aug 11, 2009


R T

Spurious, b Mode Low Ch.

Mkr1 2.42 GHz
3.70 dBm

Ref 20 dBm

Atten 10 dB

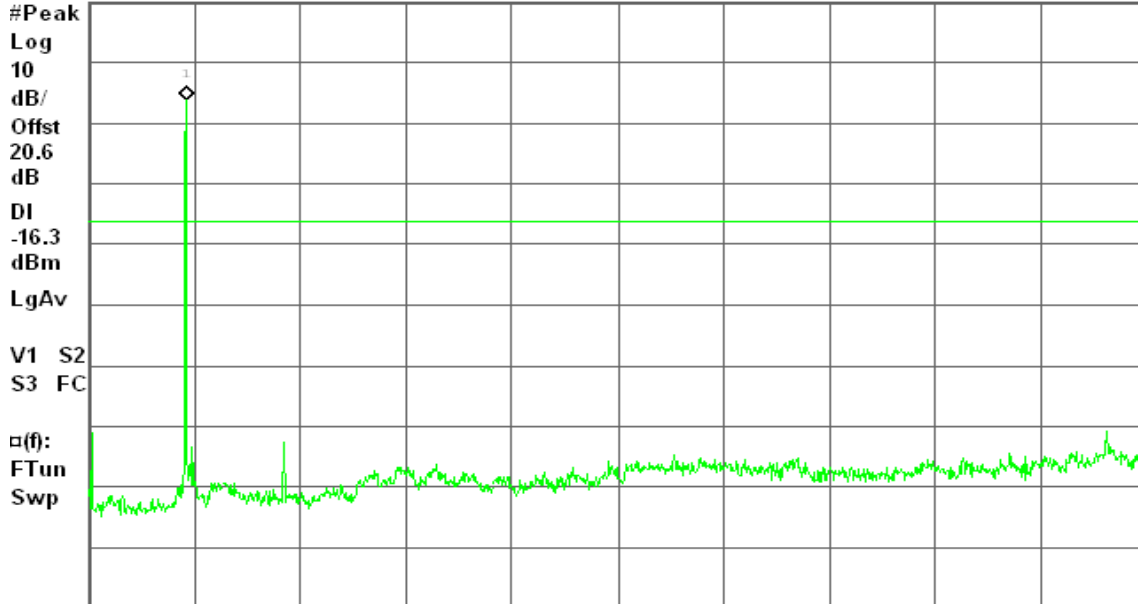

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

CH Mid

Agilent 19:04:55 Aug 11, 2009


R T

Spurious, b Mode Mid Ch.

Mkr1 2.45 GHz
3.65 dBm

Ref 20 dBm

Atten 10 dB

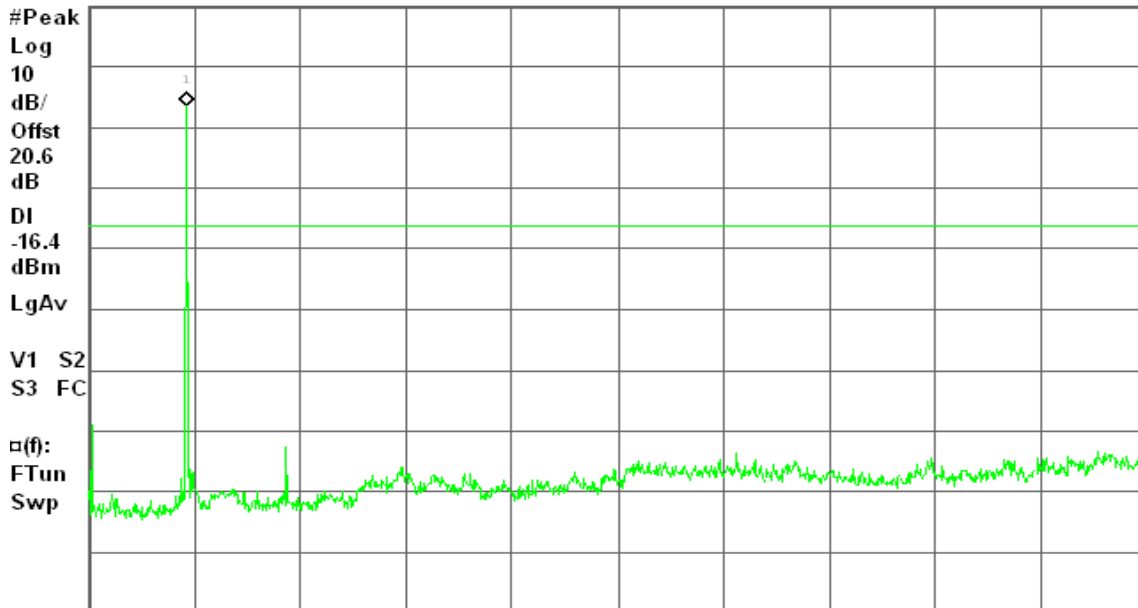

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



CH High

Agilent 19:35:15 Aug 11, 2009

R T


Spurious, b Mode High Ch.

Mkr1 2.47 GHz

Ref 20 dBm

Atten 10 dB

3.79 dBm

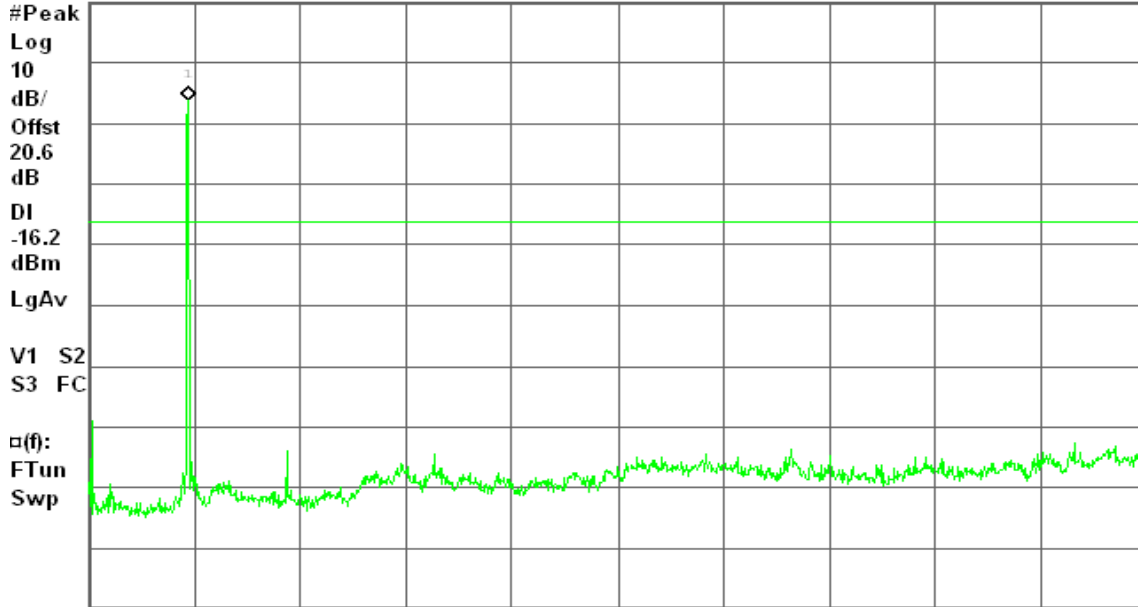

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

IEEE 802.11g mode

CH Low

Agilent 20:01:50 Aug 11, 2009

R T


Spurious, g Mode Low Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 10 dB

-5.89 dBm

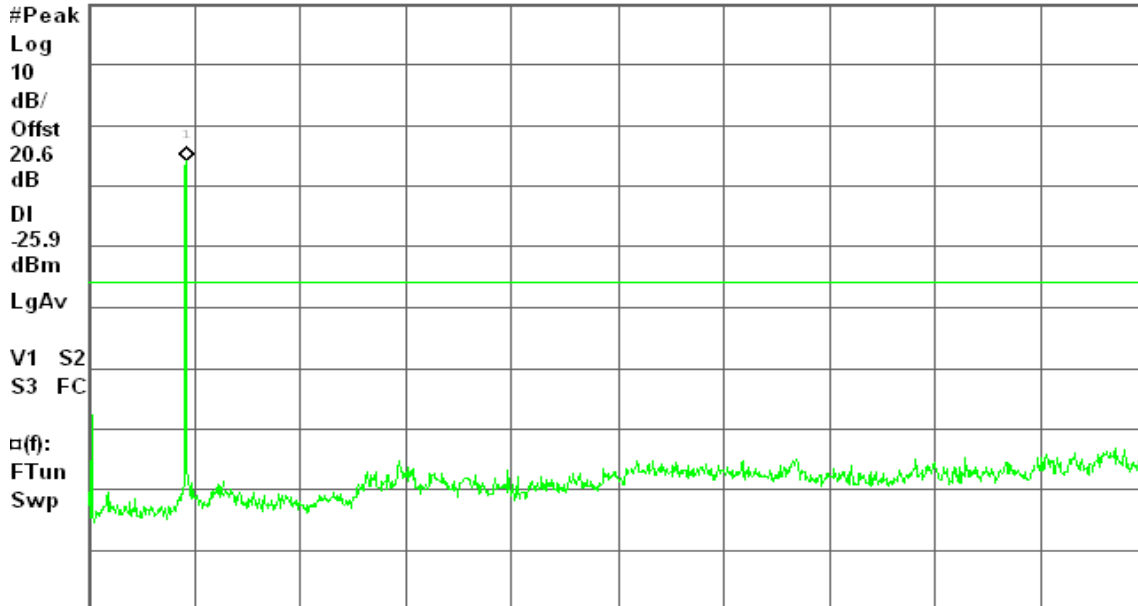

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



CH Mid

Agilent 20:09:20 Aug 11, 2009

R T


Spurious, g Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 10 dB

-5.27 dBm

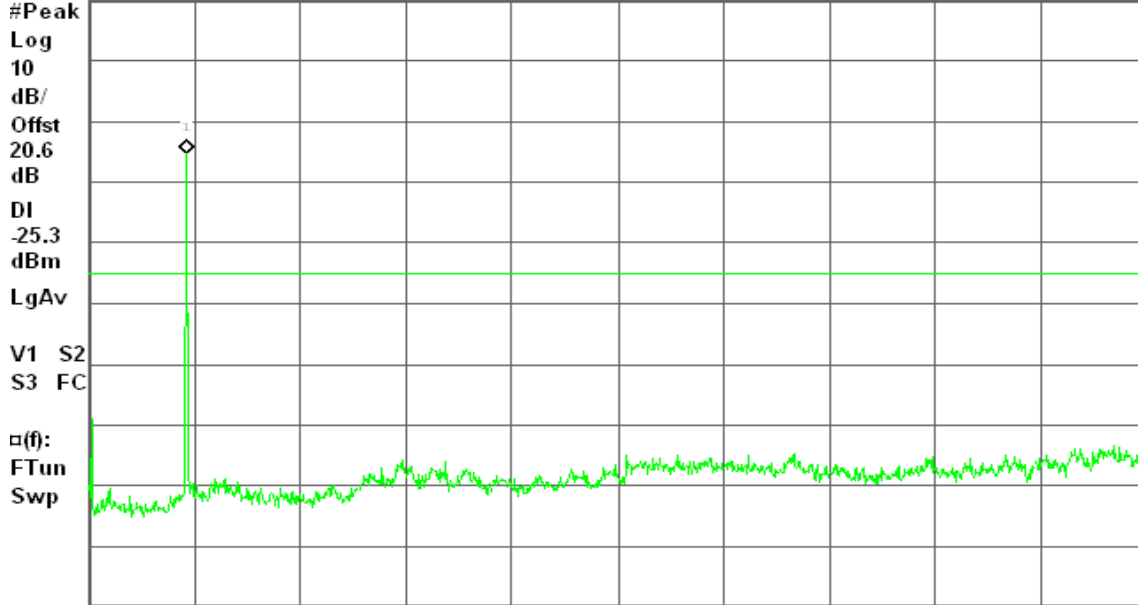

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

CH High

Agilent 20:14:53 Aug 11, 2009

R T


Spurious, g Mode High Ch.

Mkr1 2.47 GHz

Ref 20 dBm

Atten 10 dB

-5.86 dBm

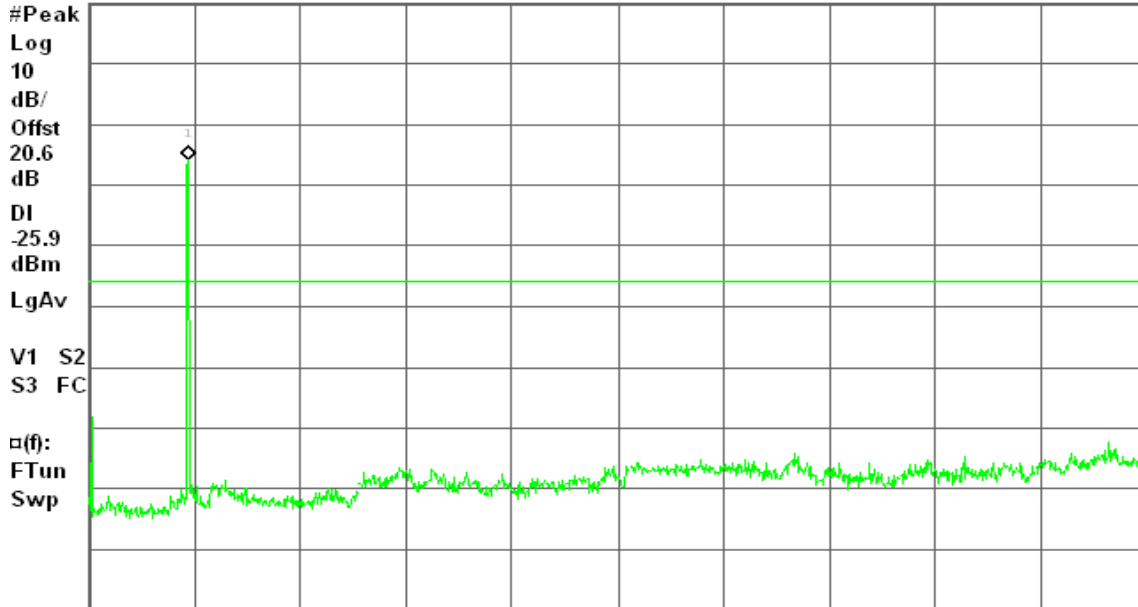

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



draft 802.11n Standard-20 MHz Channel mode / Chain 1

CH Low

Agilent 20:23:36 Aug 11, 2009

R T


Spurious, g Mode Low Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 10 dB

-9.83 dBm

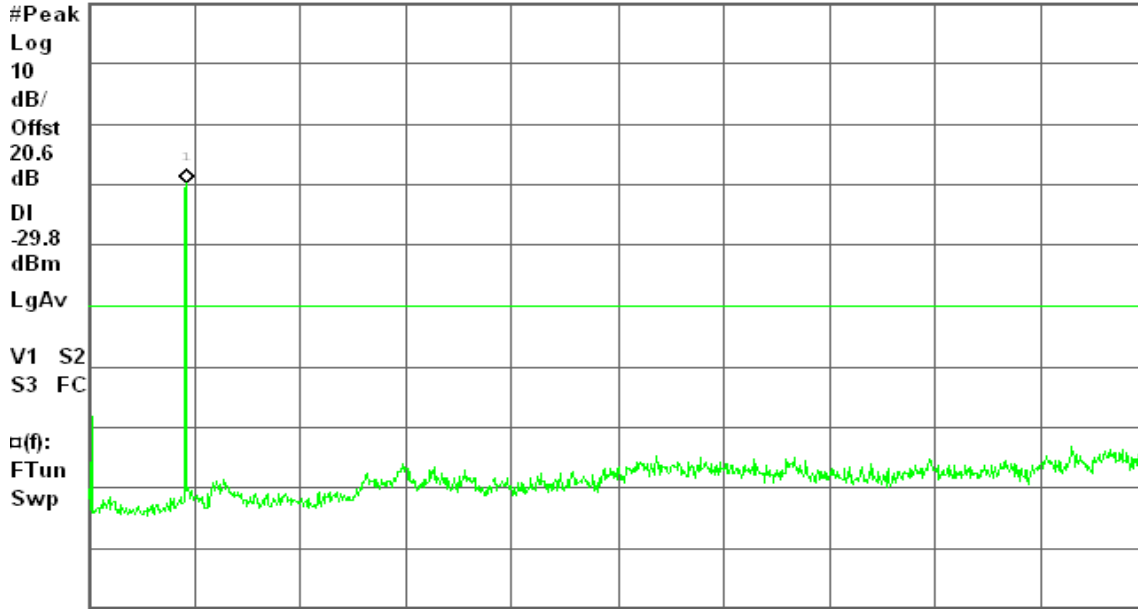

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

CH Mid

Agilent 20:30:05 Aug 11, 2009

R T


Spurious, g Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 10 dB

-10.34 dBm

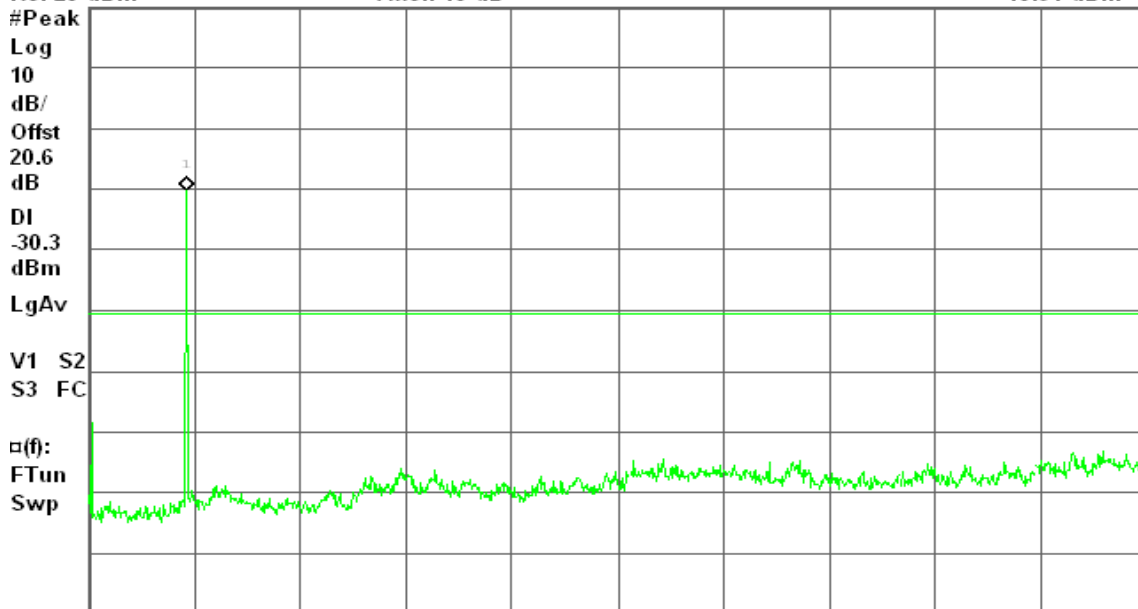

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



CH High

Agilent 20:34:21 Aug 11, 2009

R T


Spurious, g Mode High Ch.

Mkr1 2.47 GHz

Ref 20 dBm

Atten 10 dB

-9.51 dBm

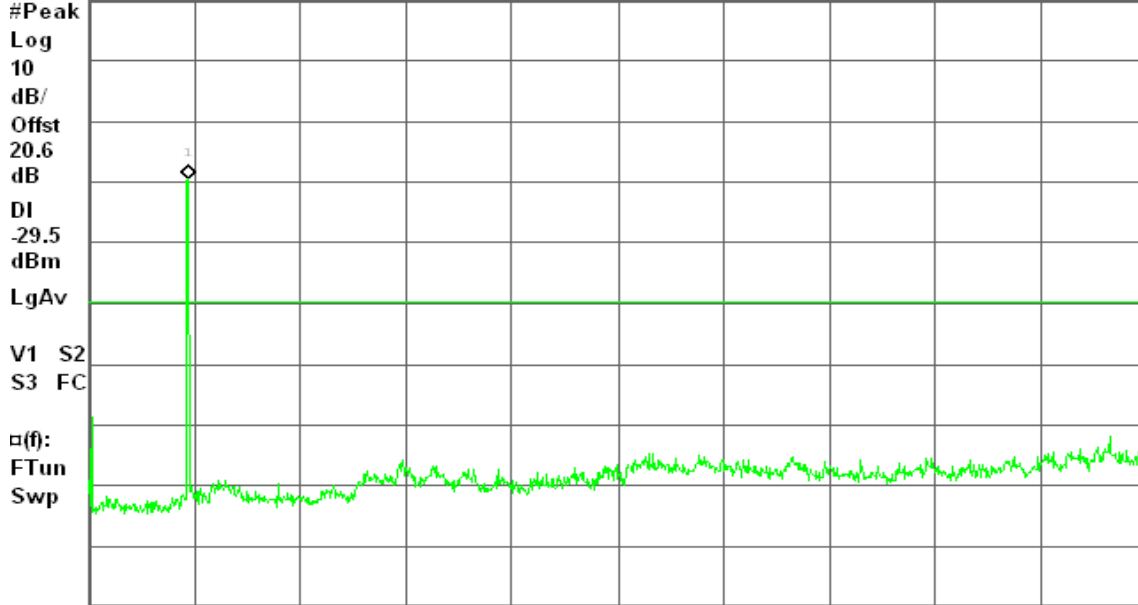

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

draft 802.11n Standard-20 MHz Channel mode / Chain 2

CH Low

Agilent 21:44:44 Aug 11, 2009

R T

Spurious, g Mode Low Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 10 dB

-10.23 dBm



Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



CH Mid

Agilent 21:53:23 Aug 11, 2009

R T


Spurious, g Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 10 dB

-9.29 dBm

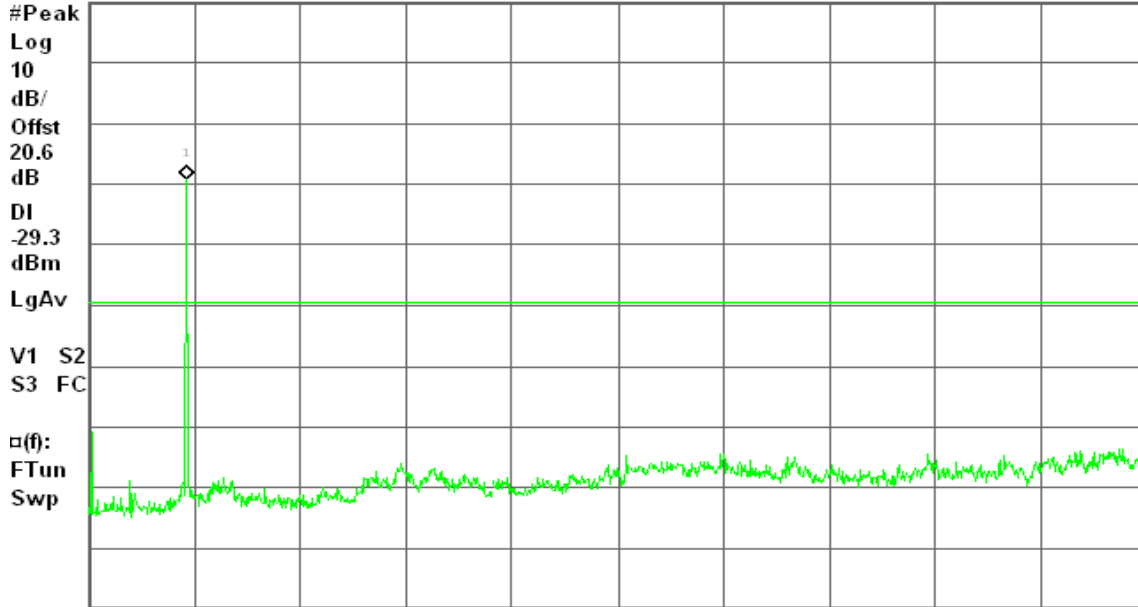

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

CH High

Agilent 22:00:25 Aug 11, 2009

R T


Spurious, g Mode High Ch.

Mkr1 2.47 GHz

Ref 20 dBm

Atten 10 dB

-10.46 dBm

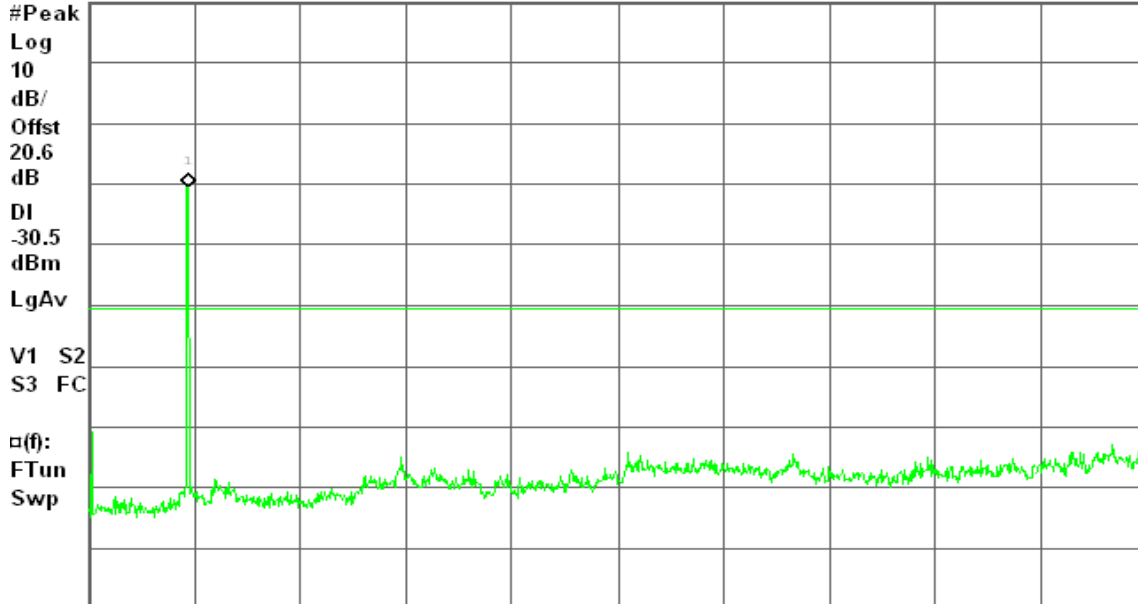

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



draft 802.11n Wide-20 MHz Channel mode / Combiner

CH Low

Agilent 22:51:51 Aug 11, 2009

R T


Spurious, g Mode Low Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 10 dB

-5.42 dBm

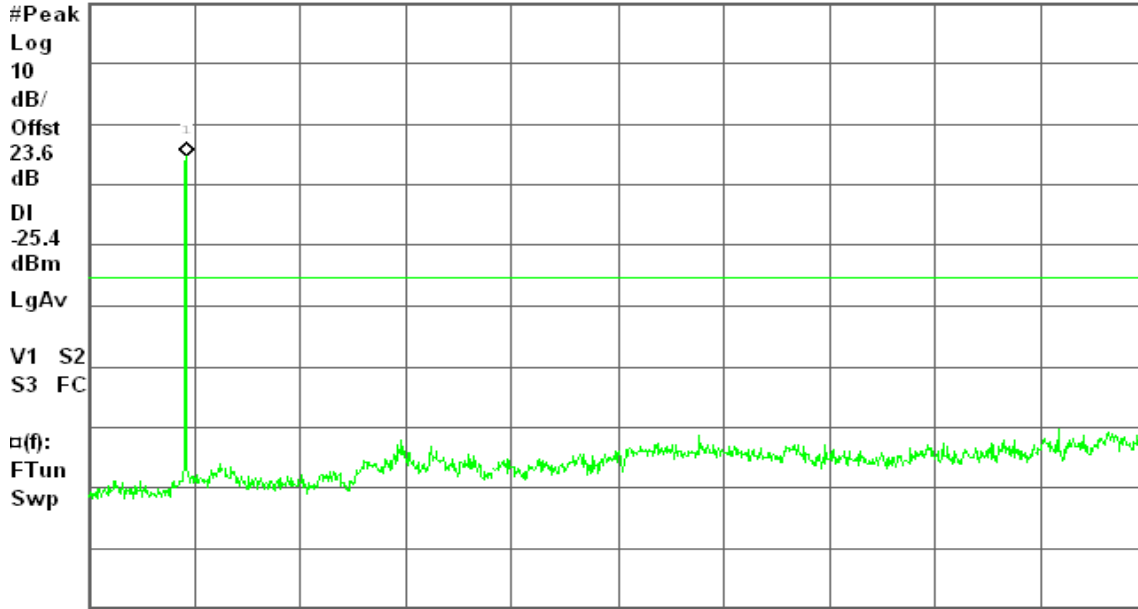

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

CH Mid

Agilent 22:24:14 Aug 11, 2009

R L


Spurious, g Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 10 dB

-5.41 dBm

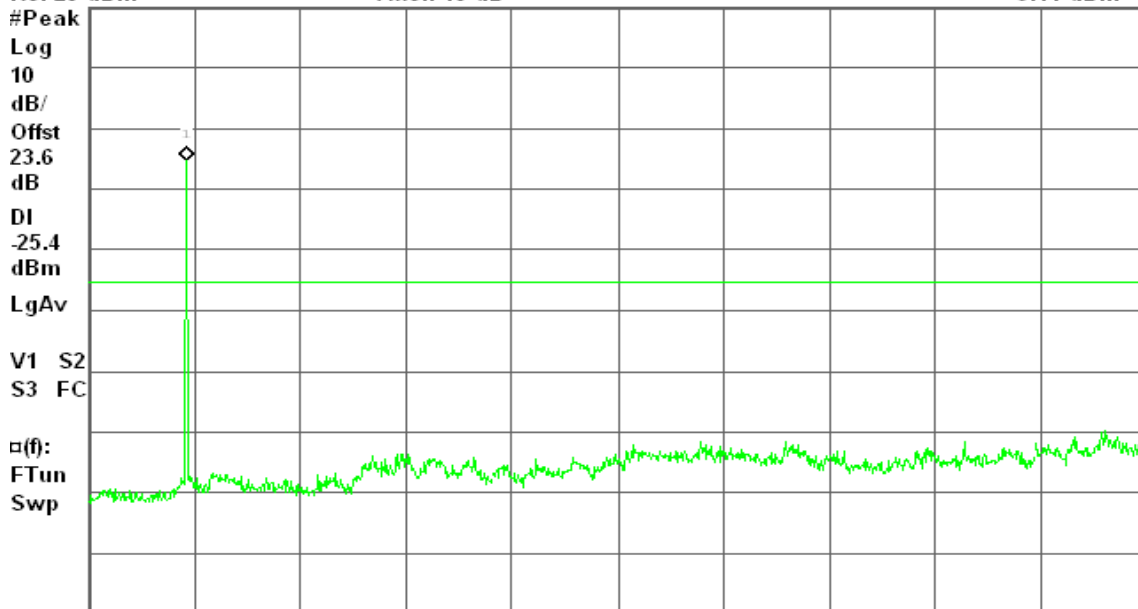

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



CH High

Agilent 22:14:35 Aug 11, 2009

R T


Spurious, g Mode High Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 10 dB

-5.99 dBm

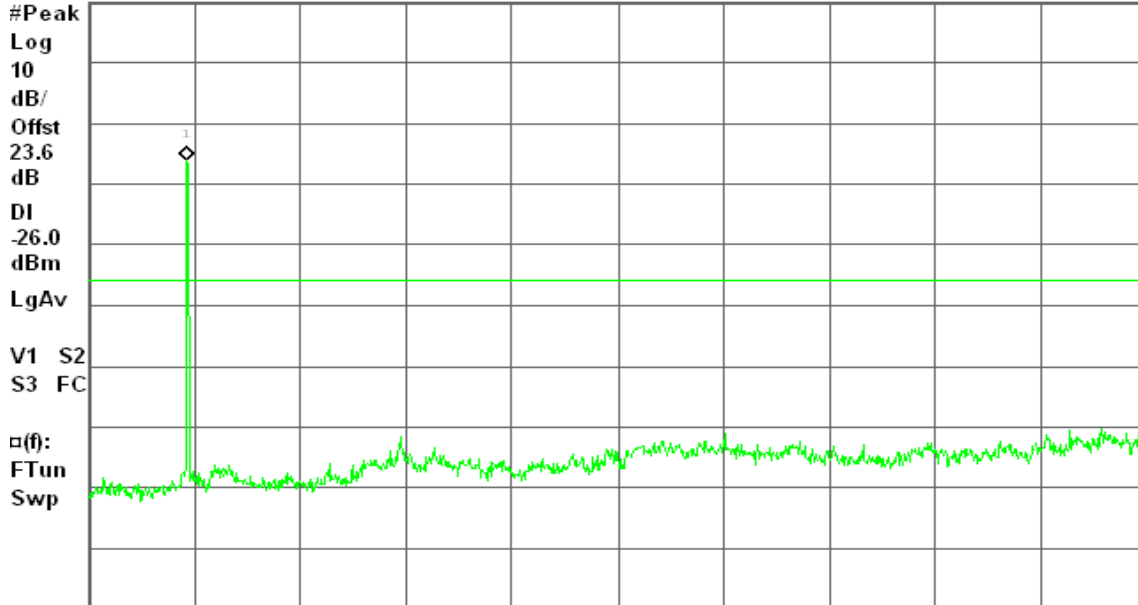

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

draft 802.11n Wide-40 MHz Channel mode / Chain 1

CH Low

Agilent 20:47:37 Aug 11, 2009

R T


Spurious, g Mode Low Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 10 dB

-10.83 dBm

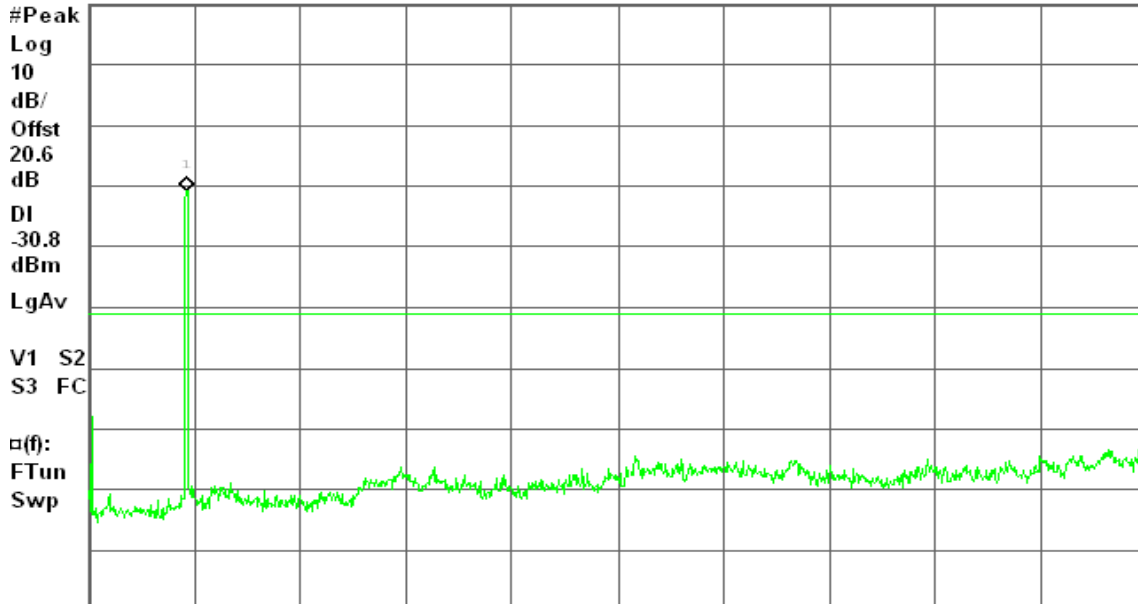

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



CH Mid

Agilent 20:51:56 Aug 11, 2009


R T

Spurious, g Mode Mid Ch.

Mkr1 2.45 GHz
-12.05 dBm

Ref 20 dBm

Atten 10 dB

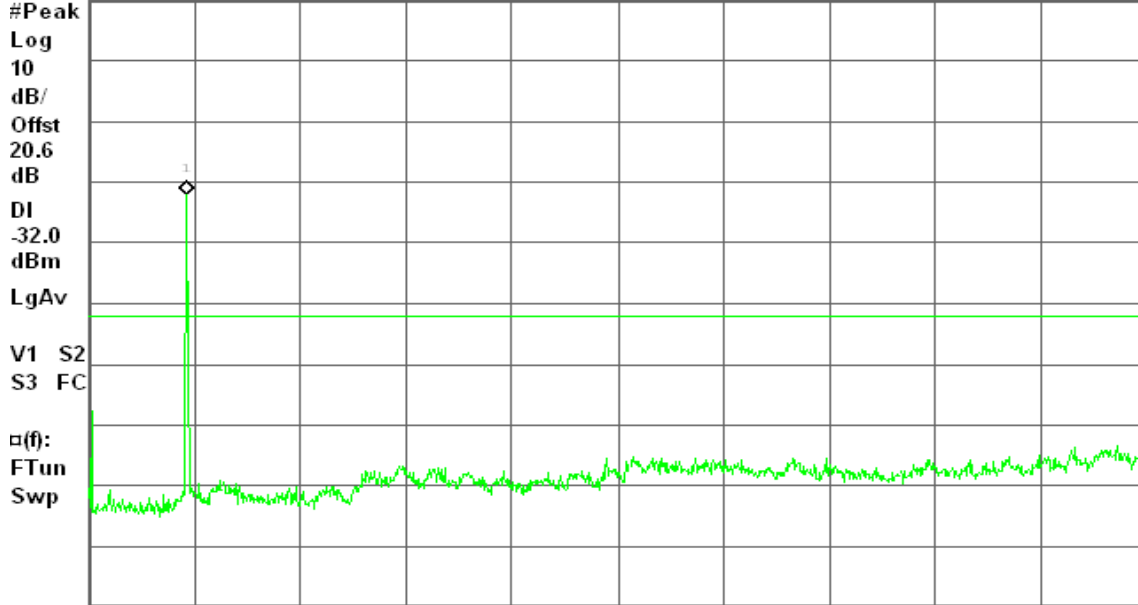

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

CH High

Agilent 20:56:12 Aug 11, 2009


R T

Spurious, g Mode High Ch.

Mkr1 2.47 GHz
-11.76 dBm

Ref 20 dBm

Atten 10 dB

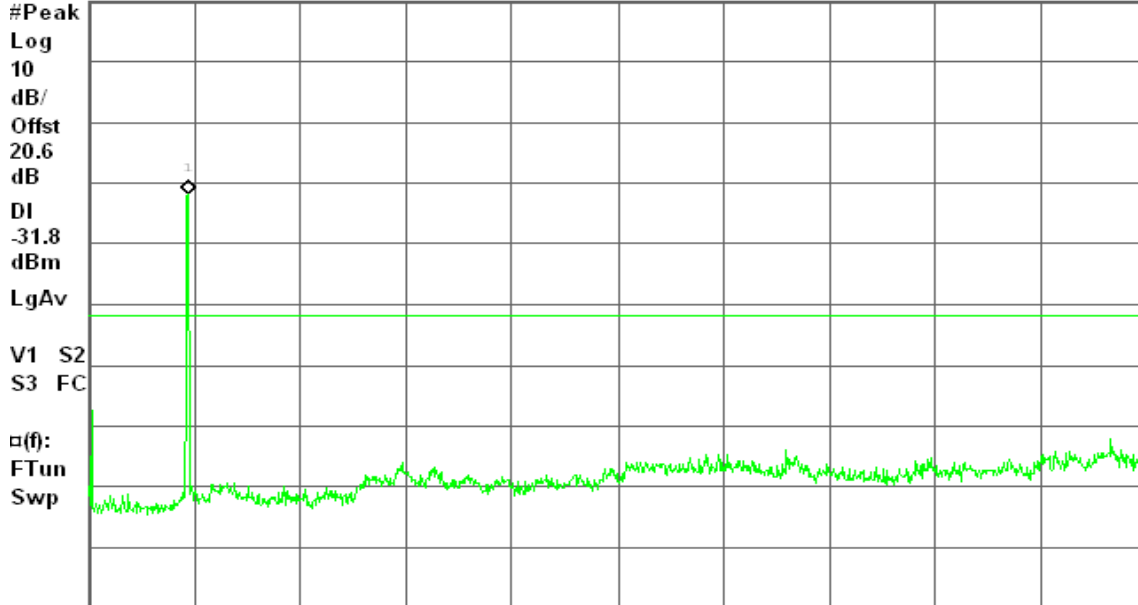

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



draft 802.11n Wide-40 MHz Channel mode / Chain 2

CH Low

Agilent 21:19:15 Aug 11, 2009

R T


Spurious, g Mode Low Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 10 dB

-13.12 dBm

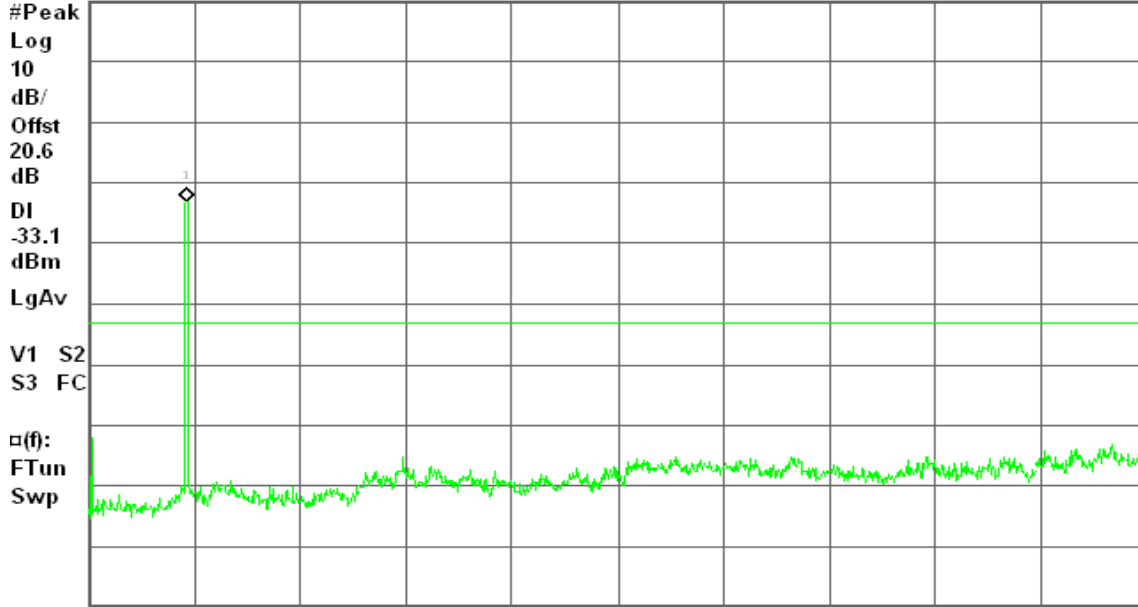

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

CH Mid

Agilent 21:23:11 Aug 11, 2009

R T


Spurious, g Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 10 dB

-12.47 dBm

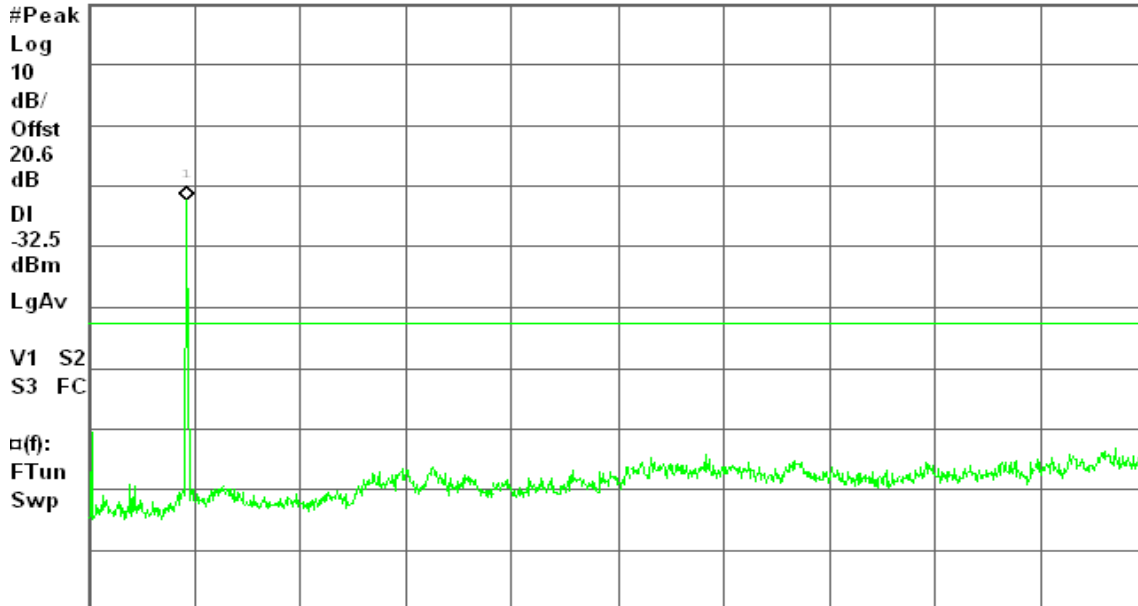

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



CH High

Agilent 21:15:19 Aug 11, 2009


R T

Spurious, g Mode High Ch.

Mkr1 2.45 GHz
-13.15 dBm

Ref 20 dBm

Atten 10 dB

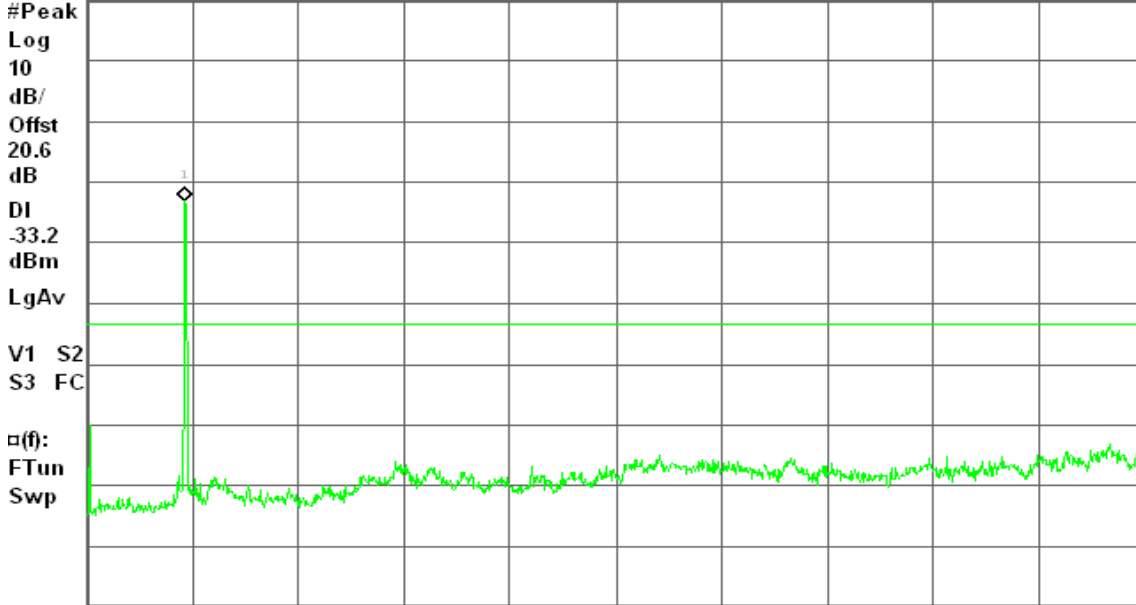

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

draft 802.11n Wide-40 MHz Channel mode / Combiner

CH Low

Agilent 23:00:56 Aug 11, 2009


R T

Spurious, g Mode Low Ch.

Mkr1 2.42 GHz
-8.11 dBm

Ref 20 dBm

Atten 10 dB

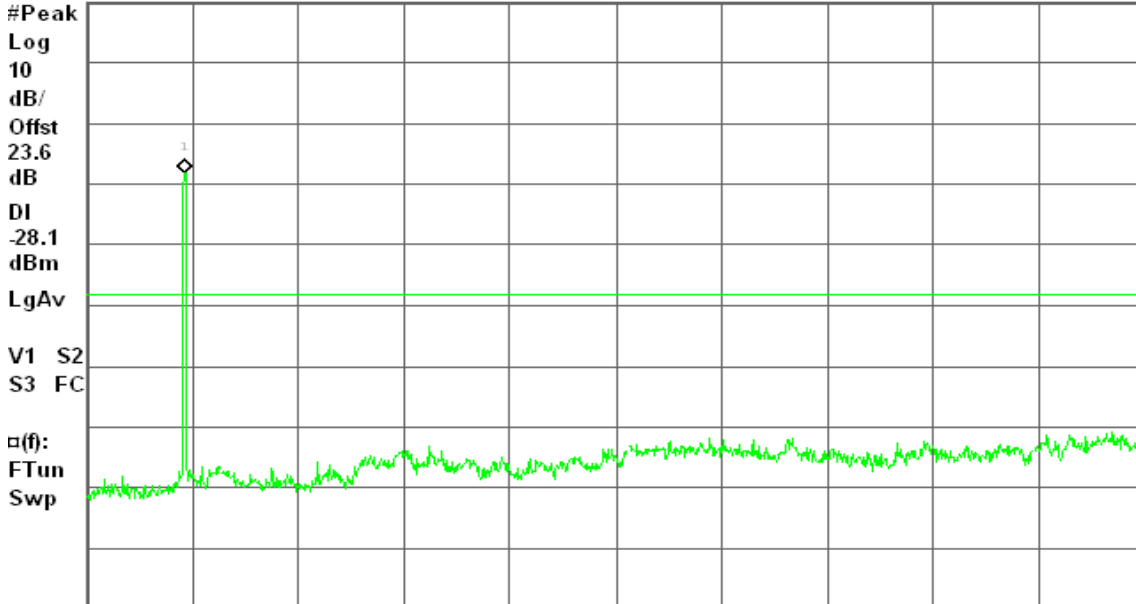

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



CH Mid

Agilent 23:04:53 Aug 11, 2009

R T


Spurious, g Mode Mid Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 10 dB

-7.65 dBm

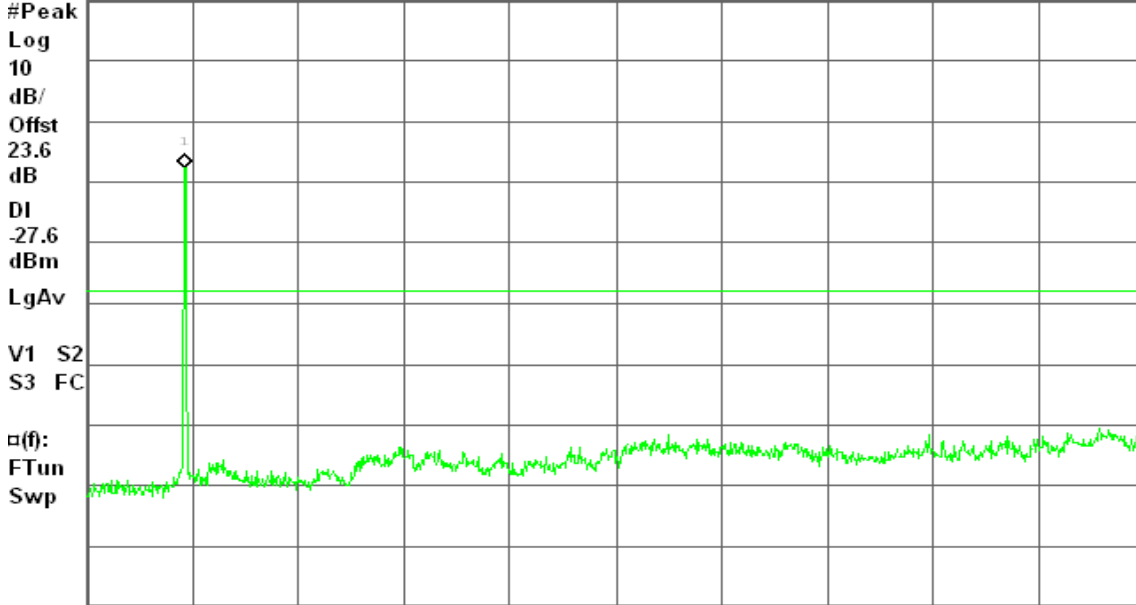

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

CH High

Agilent 23:08:23 Aug 11, 2009

R T


Spurious, g Mode High Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 10 dB

-8.23 dBm

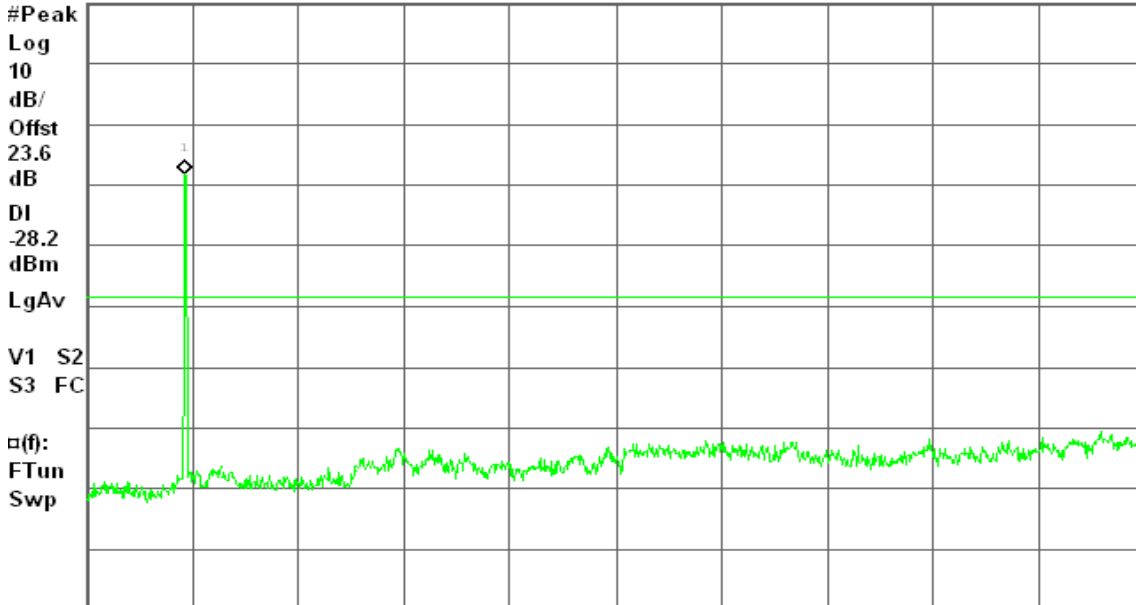

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



7.6.2 Radiated Emissions

LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at 3-meter)	Field Strength (dB $\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Configuration

Below 1 GHz

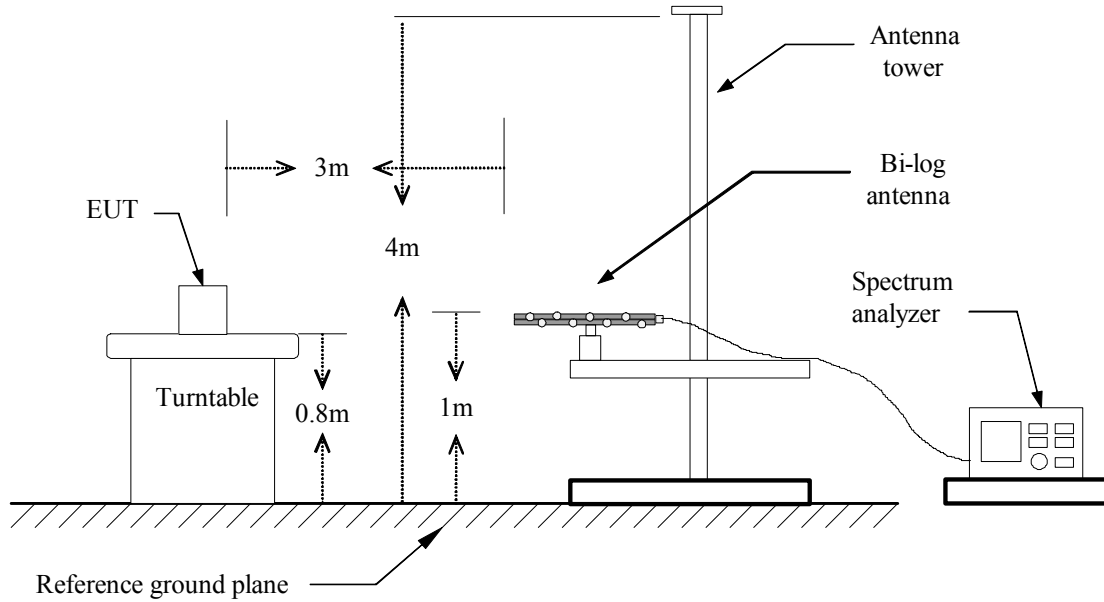

Above 1 GHz

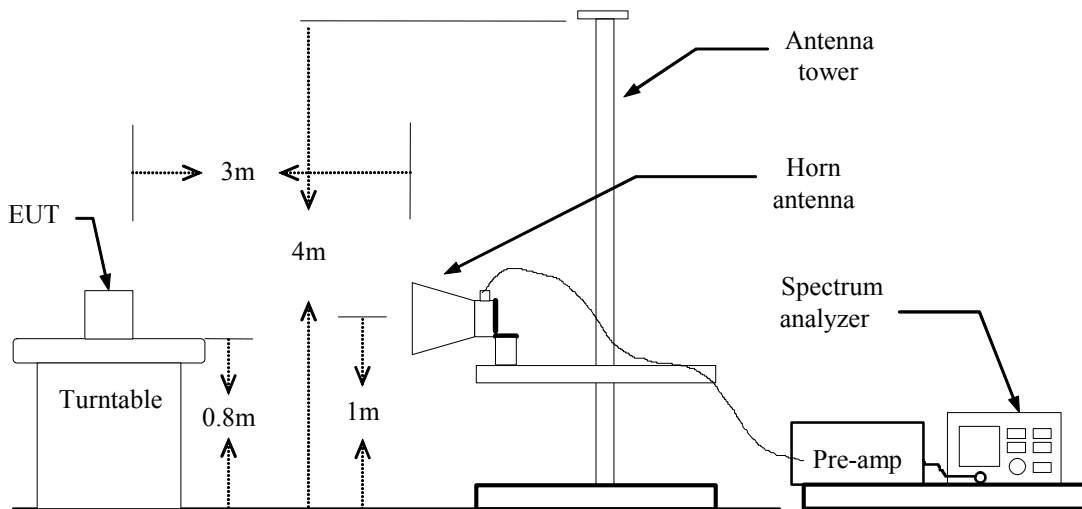



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.



Below 1 GHz

Operation Mode: Normal Link

Test Date: August 13, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
47.78	V	41.90	-12.48	29.42	40.00	-10.58	QP
73.65	V	49.21	-15.16	34.05	40.00	-5.95	Peak
135.08	V	36.51	-9.02	27.49	43.50	-16.01	Peak
167.42	V	42.23	-10.67	31.57	43.50	-11.93	Peak
599.07	V	31.04	-2.54	28.50	46.00	-17.50	Peak
647.57	V	29.79	-2.30	27.48	46.00	-18.52	Peak
75.27	H	47.18	-15.32	31.86	40.00	-8.14	Peak
167.42	H	45.30	-10.67	34.63	43.50	-8.87	Peak
251.48	H	36.69	-9.61	27.08	46.00	-18.92	Peak
296.75	H	34.21	-8.53	25.68	46.00	-20.32	Peak
599.07	H	31.56	-2.54	29.02	46.00	-16.98	Peak
663.73	H	28.72	-2.22	26.50	46.00	-19.50	Peak

Remark:

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
2. Radiated emissions measured were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).



Above 1 GHz

Operation Mode: TX / IEEE 802.11b / CH Low

Test Date: August 13, 2009

Temperature: 25°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1420.00	V	56.54	---	-7.18	49.36	---	74.00	54.00	-4.64	Peak
4825.00	V	55.63	51.55	1.04	56.67	52.59	74.00	54.00	-1.41	AVG
N/A										
1333.33	H	55.50	---	-7.34	48.16	---	74.00	54.00	-5.84	Peak
4825.00	H	49.16	---	1.04	50.20	---	74.00	54.00	-3.80	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11b / CH Mid

Test Date: August 13, 2009

Temperature: 25°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1460.00	V	55.12	---	-7.10	48.02	---	74.00	54.00	-5.98	Peak
4875.00	V	56.30	51.57	1.02	57.32	52.59	74.00	54.00	-1.41	AVG
N/A										
1326.67	H	55.45	---	-7.35	48.09	---	74.00	54.00	-5.91	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11b / CH High

Test Date: August 13, 2009

Temperature: 20°C

Tested by: Mimic Yang

Humidity: 51 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1320.00	V	55.48	---	-7.36	48.12	---	74.00	54.00	-5.88	Peak
4925.00	V	53.60	51.58	1.01	54.61	52.59	74.00	54.00	-1.41	AVG
N/A										
1546.67	H	57.00	---	-6.58	50.41	---	74.00	54.00	-3.59	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH Low

Test Date: August 13, 2009

Temperature: 25°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1370.00	V	55.40	---	-7.27	48.13	---	74.00	54.00	-5.87	Peak
N/A										
1396.67	H	55.30	---	-7.22	48.07	---	74.00	54.00	-5.93	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH Mid

Test Date: August 13, 2009

Temperature: 25°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1240.00	V	56.01	---	-7.51	48.50	---	74.00	54.00	-5.50	Peak
N/A										
1403.33	H	56.49	---	-7.21	49.28	---	74.00	54.00	-4.72	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH High

Test Date: August 13, 2009

Temperature: 25°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1386.67	V	55.87	---	-7.24	48.63	---	74.00	54.00	-5.37	Peak
N/A										
1413.33	H	54.70	---	-7.19	47.51	---	74.00	54.00	-6.49	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Low

Test Date: August 13, 2009

Temperature: 25°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1386.67	V	55.12	---	-7.24	47.88	---	74.00	54.00	-6.12	Peak
N/A										
1366.67	H	55.43	---	-7.28	48.15	---	74.00	54.00	-5.85	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Mid

Test Date: August 13, 2009

Temperature: 25°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1416.67	V	56.02	---	-7.19	48.83	---	74.00	54.00	-5.17	Peak
N/A										
1373.33	H	55.16	---	-7.27	47.90	---	74.00	54.00	-6.10	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH High

Test Date: August 13, 2009

Temperature: 25°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1403.33	V	55.43	---	-7.21	48.22	---	74.00	54.00	-5.78	Peak
N/A										
1383.33	H	55.54	---	-7.25	48.29	---	74.00	54.00	-5.71	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode / CH Low

Test Date: August 13, 2009

Temperature: 25°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1346.67	V	55.32	---	-7.32	48.01	---	74.00	54.00	-5.99	Peak
N/A										
1333.33	H	56.23	---	-7.34	48.89	---	74.00	54.00	-5.11	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode / CH Mid

Test Date: August 13, 2009

Temperature: 25°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1356.67	V	55.23	---	-7.30	47.93	---	74.00	54.00	-6.07	Peak
N/A										
1360.00	H	56.13	---	-7.29	48.84	---	74.00	54.00	-5.16	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode / CH High

Test Date: August 13, 2009

Temperature: 25°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1453.33	V	56.13	---	-7.12	49.01	---	74.00	54.00	-4.99	Peak
N/A										
1436.67	H	55.56	---	-7.15	48.42	---	74.00	54.00	-5.58	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.7 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Operation Mode: Normal Link **Test Date:** August 12, 2009
Temperature: 22°C **Tested by:** Ming Chen
Humidity: 45% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB/m)	QP Result (dBuV/m)	AV Result (dBuV/m)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
13.1100	39.81	35.11	0.19	40.00	35.30	60.00	50.00	-20.00	-14.70	L1
17.0600	49.50	37.00	0.20	49.70	37.20	60.00	50.00	-10.30	-12.80	L1
18.5150	46.22	39.42	0.18	46.40	39.60	60.00	50.00	-13.60	-10.40	L1
19.1400	45.93	40.43	0.17	46.10	40.60	60.00	50.00	-13.90	-9.40	L1
20.7300	47.12	42.42	0.18	47.30	42.60	60.00	50.00	-12.70	-7.40	L1
24.6350	46.40	41.90	0.30	46.70	42.20	60.00	50.00	-13.30	-7.80	L1
11.7150	40.44	36.24	0.16	40.60	36.40	60.00	50.00	-19.40	-13.60	L2
12.5350	44.32	37.72	0.18	44.50	37.90	60.00	50.00	-15.50	-12.10	L2
17.0650	50.60	40.50	0.20	50.80	40.70	60.00	50.00	-9.20	-9.30	L2
18.3700	45.32	41.62	0.18	45.50	41.80	60.00	50.00	-14.50	-8.20	L2
20.7300	47.42	42.62	0.18	47.60	42.80	60.00	50.00	-12.40	-7.20	L2
24.6350	46.60	42.00	0.30	46.90	42.30	60.00	50.00	-13.10	-7.70	L2


Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz.
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)




Test Plots

Conducted emissions (Line 1)

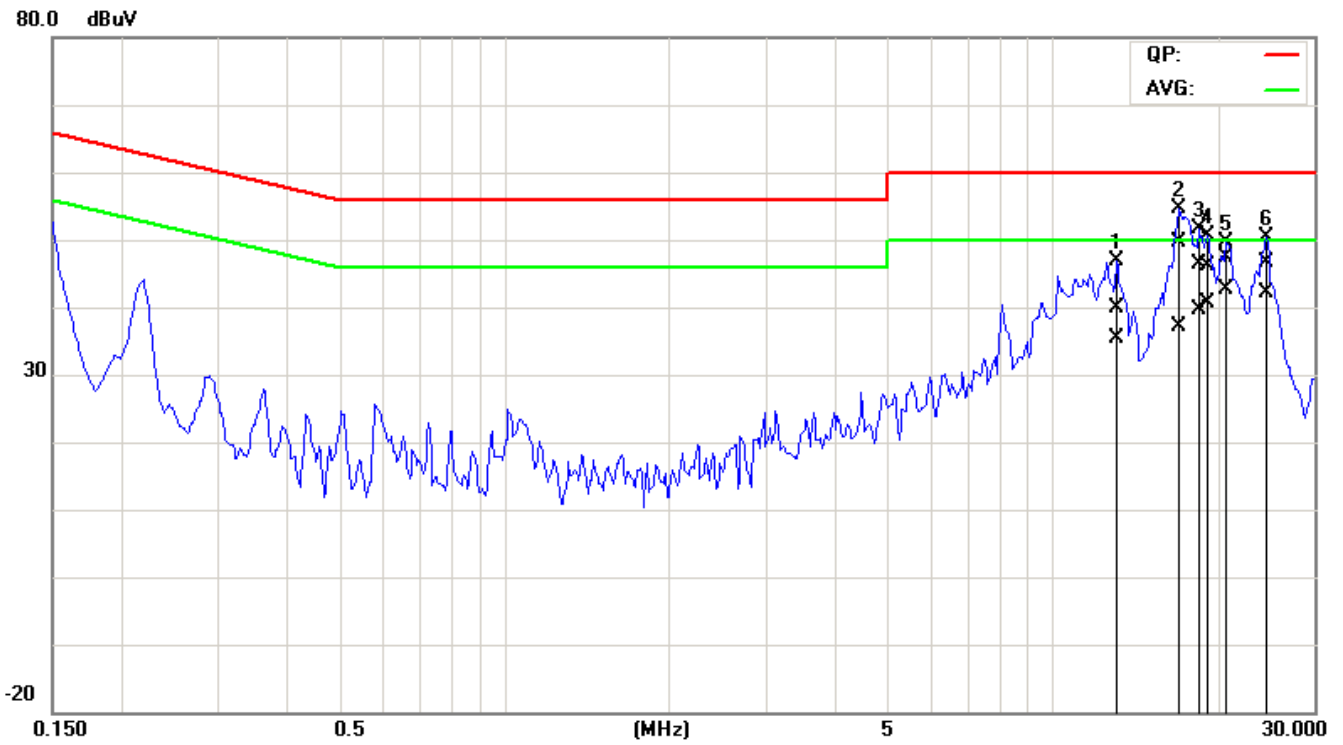

Conducted emissions (Line 2)

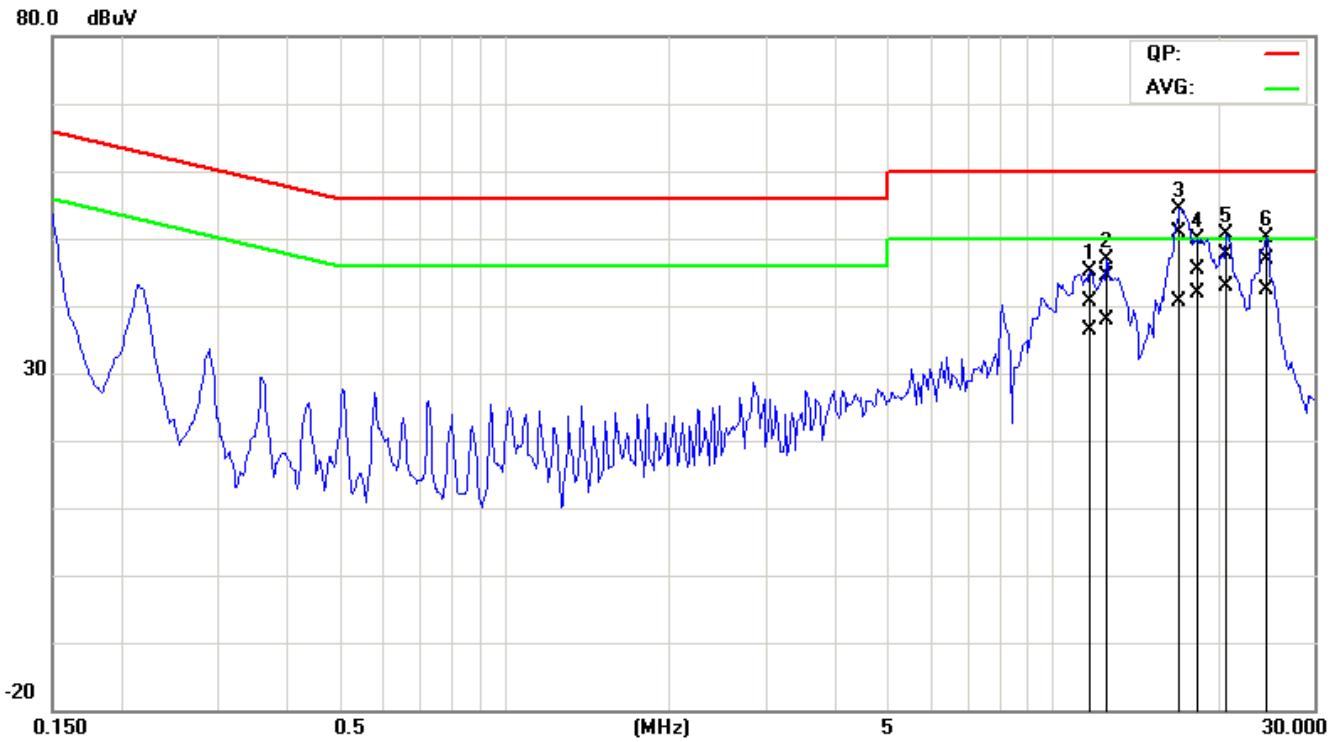



APPENDIX I RADIO FREQUENCY EXPOSURE

LIMIT

According to §15.247(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this chapter.

EUT Specification

EUT	802.11b/g/n USB Dongle
Frequency band (Operating)	<input checked="" type="checkbox"/> WLAN: 2.412GHz ~ 2.462GHz <input type="checkbox"/> WLAN: 5.18GHz ~ 5.32GHz / 5.50GHz ~ 5.70GHz <input type="checkbox"/> WLAN: 5.745GHz ~ 5.825GHz <input type="checkbox"/> Others
Device category	<input checked="" type="checkbox"/> Portable (<20cm separation) <input type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others
Exposure classification	<input type="checkbox"/> Occupational/Controlled exposure (S = 5mW/cm ²) <input checked="" type="checkbox"/> General Population/Uncontrolled exposure (S=1mW/cm ²)
Antenna diversity	<input type="checkbox"/> Single antenna <input checked="" type="checkbox"/> Multiple antennas <input type="checkbox"/> Tx diversity <input type="checkbox"/> Rx diversity <input checked="" type="checkbox"/> Tx/Rx diversity
Max. output power	IEEE 802.11b mode: 18.57 dBm (71.94 mW) IEEE 802.11g mode: 16.47 dBm (44.36 mW) draft 802.11n Standard-20 MHz Channel mode: 16.15 dBm (41.20 mW) draft 802.11n Wide-40 MHz Channel mode: 16.46 dBm (44.25 mW)
Antenna gain (Max)	3.19dBi (Numeric gain: 2.08)
Evaluation applied	<input type="checkbox"/> MPE Evaluation <input checked="" type="checkbox"/> SAR Evaluation* <input type="checkbox"/> N/A

Remark:

1. The maximum output power is 18.57dBm (71.94mW) at 2437MHz (with 2.08 numeric antenna gain.)
2. DTS device is not subject to routine RF evaluation; MPE estimate is used to justify the compliance.
3. For mobile or fixed location transmitters, no SAR consideration applied. The maximum power density is 1.0 mW/cm² even if the calculation indicates that the power density would be larger.

TEST RESULTS

No non-compliance noted.

Remark: Please refer to the separated SAR report.