

FCC Test Report

Product Name	System Controller
Model No	gSC2
FCC ID.	SCGGSC22013

Applicant	CORE BRANDS, LLC
Address	1800 South McDowell Blvd., Petaluma, CA 94954

Date of Receipt	Dec. 30, 2013
Issue Date	Jan. 17, 2014
Report No.	1410059R-RFUSP02V00
Report Version	V1.0



The test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.
This report must not be used to claim product endorsement by TAF or any agency of the U.S. Government

Test Report Certification

Issue Date: Jan. 17, 2014

Report No.: 1410059R-RFUSP02V00



Product Name	System Controller
Applicant	CORE BRANDS, LLC
Address	1800 South McDowell Blvd., Petaluma, CA 94954
Manufacturer	CORE BRANDS, LLC
Model No.	gSC2
FCC ID.	SCGGSC22013
EUT Rated Voltage	AC 100-240V / 50-60Hz
EUT Test Voltage	AC 120V/60Hz
Trade Name	ELAN
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2012 ANSI C63.4: 2003, ANSI C63.10: 2009
Test Result	Complied

The test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by TAF or any agency of the U.S. Government

Documented By :

A handwritten signature in blue ink that reads 'Genie Chang'.

(Senior Adm. Specialist / Genie Chang)

Tested By :

A handwritten signature in blue ink that reads 'Vincent Chu'.

(Engineer / Vincent Chu)

Approved By :

A handwritten signature in blue ink that reads 'Vincent Lin'.

(Director / Vincent Lin)

TABLE OF CONTENTS

	Description	Page
1.	GENERAL INFORMATION	5
1.1.	EUT Description.....	5
1.2.	Operational Description	7
1.3.	Tested System Details.....	8
1.4.	Configuration of Tested System	8
1.5.	EUT Exercise Software	9
1.6.	Test Facility	10
2.	Conducted Emission.....	11
2.1.	Test Equipment.....	11
2.2.	Test Setup	11
2.3.	Limits	12
2.4.	Test Procedure	12
2.5.	Uncertainty	12
2.6.	Test Result of Conducted Emission.....	13
3.	Peak Power Output	15
3.1.	Test Equipment.....	15
3.2.	Test Setup	15
3.3.	Limits	15
3.4.	Test Procedure	15
3.5.	Uncertainty	15
3.6.	Test Result of Peak Power Output.....	16
4.	Radiated Emission	20
4.1.	Test Equipment.....	20
4.2.	Test Setup	21
4.3.	Limits	22
4.4.	Test Procedure	23
4.5.	Uncertainty	23
4.6.	Test Result of Radiated Emission.....	24
5.	RF antenna conducted test.....	40
5.1.	Test Equipment.....	40
5.2.	Test Setup	40
5.3.	Limits	40
5.4.	Test Procedure	40
5.5.	Uncertainty	41
5.6.	Test Result of RF antenna conducted test.....	42
6.	Band Edge	46
6.1.	Test Equipment.....	46
6.2.	Test Setup	46
6.3.	Limits	47
6.4.	Test Procedure	47
6.5.	Uncertainty	47
6.6.	Test Result of Band Edge	48

7.	Occupied Bandwidth	64
7.1.	Test Equipment.....	64
7.2.	Test Setup	64
7.3.	Limits	64
7.4.	Test Procedure	64
7.5.	Uncertainty	64
7.6.	Test Result of Occupied Bandwidth	65
8.	Power Density	77
8.1.	Test Equipment.....	77
8.2.	Test Setup	77
8.3.	Limits	77
8.4.	Test Procedure	77
8.5.	Uncertainty	77
8.6.	Test Result of Power Density	78
9.	EMI Reduction Method During Compliance Testing	90

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	System Controller
Trade Name	ELAN
Model No.	gSC2
FCC ID.	SCGGSC22013
Frequency Range	2412-2462MHz for 802.11b/g/n-20BW, 2422-2452MHz for 802.11n-40BW
Number of Channels	802.11b/g/n-20MHz: 11, n-40MHz: 7
Data Speed	802.11b: 1-11Mbps, 802.11g: 6-54Mbps, 802.11n: up to 150Mbps
Type of Modulation	802.11b: DSSS (DBPSK, DQPSK, CCK) 802.11g/n: OFDM (BPSK, QPSK, 16QAM, 64QAM)
Antenna Type	Dipole Antenna
Antenna Gain	Refer to the table "Antenna List"
Channel Control	Auto
Power Adapter	MFR: APD, M/N: WA-30B12 Input: 100-240V~, 50-60Hz, 0.8A Output: 12V  , 2.5A Cable Out: Non-Shielded, 1.8m
Contain Module	LITEON / WN6609LH-L5

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	ARISTOTLE	RFA-02-L2M2-M10-N	Dipole Antenna	2.09 dBi for 2.4 GHz

Note:

1. The antenna of EUT is conform to FCC 15.203.

802.11b/g/n-20MHz Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 01:	2412 MHz	Channel 02:	2417 MHz	Channel 03:	2422 MHz	Channel 04:	2427 MHz
Channel 05:	2432 MHz	Channel 06:	2437 MHz	Channel 07:	2442 MHz	Channel 08:	2447 MHz
Channel 09:	2452 MHz	Channel 10:	2457 MHz	Channel 11:	2462 MHz		

802.11n-40MHz Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 03:	2422 MHz	Channel 04:	2427 MHz	Channel 05:	2432 MHz	Channel 06:	2437 MHz
Channel 07:	2442 MHz	Channel 08:	2447 MHz	Channel 09:	2452 MHz		

Note:

1. The EUT is a System Controller with a built-in 2.4GHz WLAN transceiver.
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
3. Lowest and highest data rates are tested in each mode. Only worst case is shown in the report.
(802.11b is 1Mbps 、 802.11g is 6Mbps 、 802.11n(20M-BW) is 7.2Mbps and 、
802.11n(40M-BW) is 15Mbps)
4. These tests are conducted on a sample for the purpose of demonstrating compliance of 802.11b/g/n transmitter with Part 15 Subpart C Paragraph 15.247 of spread spectrum devices.

Test Mode:	Mode 1: Transmit (802.11b 1Mbps)
	Mode 2: Transmit (802.11g 6Mbps)
	Mode 3: Transmit (802.11n MCS0 7.2Mbps 20M-BW)
	Mode 4: Transmit (802.11n MCS0 15Mbps 40M-BW)

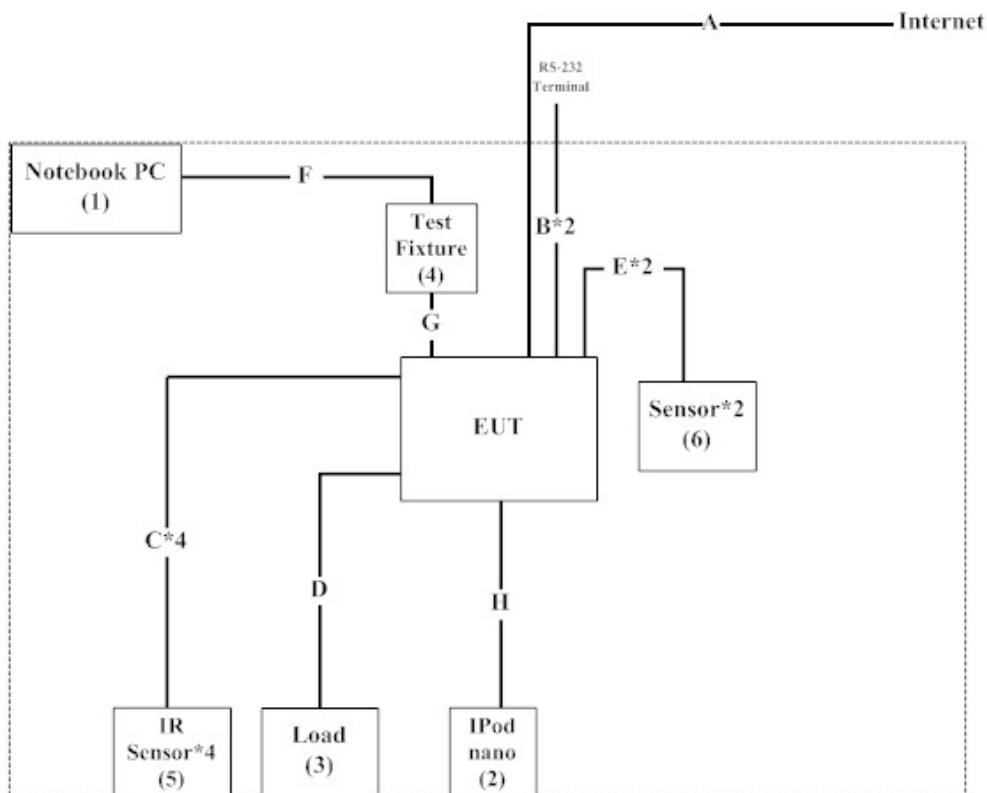
1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook PC	DELL	PPT	N/A	Non-Shielded, 0.8m
2	IPod nano	Apple	A1199	YM7088TVVQ5	N/A
3	Load	Liteon	N/A	N/A	N/A
4	Test Fixture	Liteon	N/A	N/A	N/A
5	IR Sensor * 4	Liteon	N/A	N/A	N/A
6	Sensor * 2	Liteon	N/A	N/A	N/A

Signal Cable Type	Signal cable Description
A LAN Cable	Non-Shielded, 3.0m
B RJ45 to RS232 Cable	Non-Shielded, 1.0m, two PCS.
C IR Cable	Non-Shielded, 5.0m, four PCS.
D Signal Cable	Non-Shielded, 2.0m
E Signal Cable	Non-Shielded, 1.0m, two PCS.
F USB Cable	Shielded, 1.5m, with one ferrite core bonded.
G Test Fixture Cable	Shielded, 0.05m
H USB Cable	Shielded, 1.2m

1.4. Configuration of Tested System



1.5. EUT Exercise Software

- (1) Setup the EUT as shown in Section 1.4
- (2) Execute “Tera Term v6.7” program on the Notebook PC.
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Press “OK” to start the continuous Transmit.
- (5) Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from

Quietek Corporation's Web Site: <http://www.quietek.com/tw/ctg/cts/accreditations.htm>

The address and introduction of Quietek Corporation's laboratories can be founded in our Web site:

<http://www.quietek.com/>

Site Description: File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Registration Number: 92195

Site Name: Quietek Corporation
Site Address: No.5-22, Ruishukeng,
Linkou Dist. New Taipei City 24451,
Taiwan, R.O.C.
TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
E-Mail : service@quietek.com

FCC Accreditation Number: TW1014

2. Conducted Emission


2.1. Test Equipment

	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
X	Test Receiver	R & S	ESCS 30 / 825442/018	Sep., 2013	
X	Artificial Mains Network	R & S	ENV4200 / 848411/10	Feb., 2013	Peripherals
X	LISN	R & S	ESH3-Z5 / 825562/002	Feb., 2013	EUT
	DC LISN	Schwarzbeck	8226 / 176	Mar, 2013	EUT
X	Pulse Limiter	R & S	ESH3-Z2 / 357.8810.52	Feb., 2013	
	No.1 Shielded Room				

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked by "X" are used to measure the final test results.

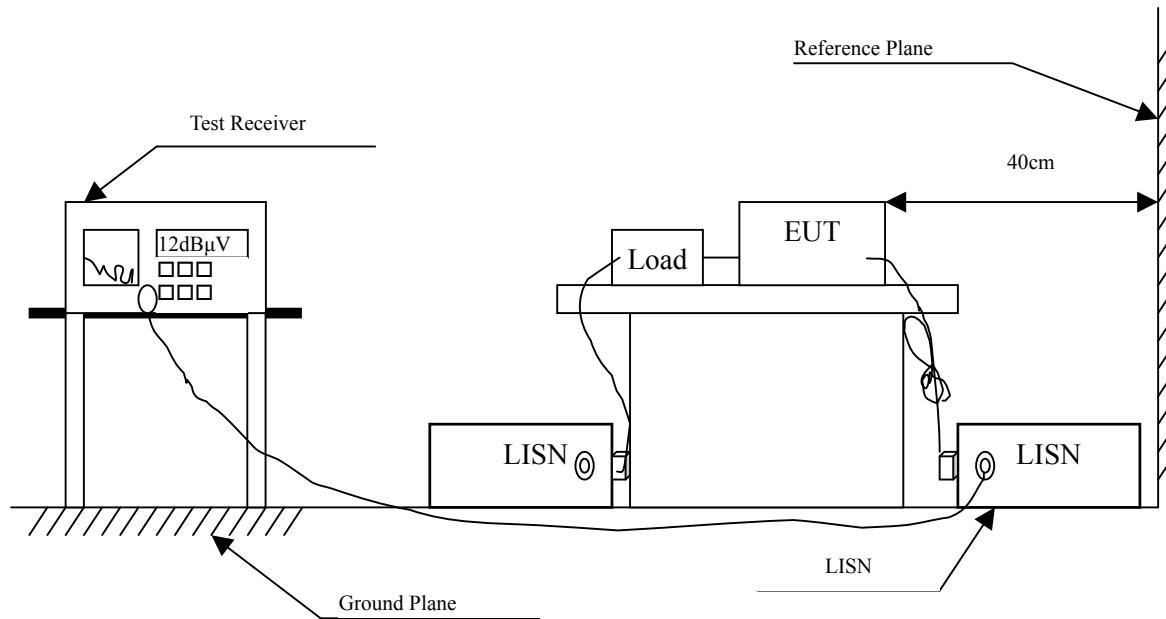2.2. Test Setup



2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBμV) Limit		
Frequency MHz	Limits	
	QP	AVG
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.5. Uncertainty

± 2.26 dB

2.6. Test Result of Conducted Emission

Product : System Controller
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 4: Transmit (802.11n MCS0 15Mbps 40M-BW) (2437MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dB μ V	dB μ V	dB	dB μ V
Line 1					
Quasi-Peak					
0.173	9.742	38.660	48.403	-16.940	65.343
0.240	9.740	34.690	44.430	-18.999	63.429
0.306	9.744	35.770	45.514	-16.029	61.543
0.447	9.750	37.750	47.500	-10.014	57.514
0.826	9.767	29.660	39.427	-16.573	56.000
16.013	10.000	25.610	35.610	-24.390	60.000
Average					
0.173	9.742	30.740	40.483	-14.860	55.343
0.240	9.740	24.880	34.620	-18.809	53.429
0.306	9.744	27.580	37.324	-14.219	51.543
0.447	9.750	25.780	35.530	-11.984	47.514
0.826	9.767	18.690	28.457	-17.543	46.000
16.013	10.000	19.140	29.140	-20.860	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ “ means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : System Controller
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 4: Transmit (802.11n MCS0 15Mbps 40M-BW) (2437MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dB μ V	dB μ V	dB	dB μ V
Line 2					
Quasi-Peak					
0.181	9.748	39.370	49.118	-15.996	65.114
0.244	9.751	32.930	42.681	-20.633	63.314
0.408	9.748	35.300	45.048	-13.581	58.629
0.463	9.751	35.100	44.851	-12.206	57.057
1.271	9.797	28.780	38.577	-17.423	56.000
14.869	10.010	25.710	35.720	-24.280	60.000
Average					
0.181	9.748	29.900	39.648	-15.466	55.114
0.244	9.751	24.270	34.021	-19.293	53.314
0.408	9.748	21.790	31.538	-17.091	48.629
0.463	9.751	26.790	36.541	-10.516	47.057
1.271	9.797	18.060	27.857	-18.143	46.000
14.869	10.010	22.310	32.320	-17.680	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ “ means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

3. Peak Power Output


3.1. Test Equipment

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X Power Meter	Anritsu	ML2495A/6K00003357	May, 2013
X Power Sensor	Anritsu	MA2411B/0738448	Jun, 2013

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

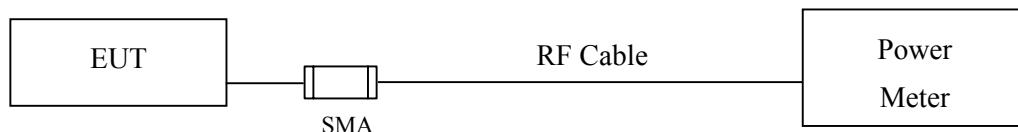3.2. Test Setup



3.3. Limits

The maximum peak power shall be less 1 Watt.

3.4. Test Procedure

The EUT was tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements. The maximum peak conducted output power using KDB 558074 section 9.1.3 PKPM1 Peak power meter method.

3.5. Uncertainty

± 1.27 dB

3.6. Test Result of Peak Power Output

Product : System Controller
 Test Item : Peak Power Output Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)				Peak Power	Required Limit	Result
		1	2	5.5	11			
		Measurement Level (dBm)						
01	2412	15.75	-	-	16.11	18.42	<30dBm	Pass
06	2437	15.76	15.82	16	16.15	18.69	<30dBm	Pass
11	2462	15.71	-	-	16.16	19.07	<30dBm	Pass

Note: Peak Power Output Value =Reading value on power meter + cable loss

Product : System Controller
 Test Item : Peak Power Output Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit	Result
		6	9	12	18	24	36	48	54			
		Measurement Level (dBm)										
01	2412	16.03	-	-	-	-	-	-	-	24.66	<30dBm	Pass
06	2437	16.09	15.95	15.82	15.75	15.61	15.48	15.33	15.21	24.28	<30dBm	Pass
11	2462	16.01	-	-	-	-	-	-	-	25.11	<30dBm	Pass

Note: Peak Power Output Value =Reading value on power meter + cable loss

Product : System Controller
 Test Item : Peak Power Output Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n MCS0 7.2Mbps 20M-BW)

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit	Result
		7.2	14.4	21.7	28.9	43.3	57.8	65	72.2			
		Measurement Level (dBm)										
01	2412	16.01	-	-	-	-	-	-	-	24.41	<30dBm	Pass
06	2437	16.05	15.91	15.82	15.69	15.54	15.45	15.37	15.21	24.28	<30dBm	Pass
11	2462	16.03	-	-	-	-	-	-	-	24.73	<30dBm	Pass

Note: Peak Power Output Value =Reading value on power meter + cable loss

Product : System Controller
 Test Item : Peak Power Output Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit (802.11n MCS0 15Mbps 40M-BW)

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit	Result
		15	30	45	60	90	120	135	150			
		Measurement Level (dBm)										
03	2422	13.03	-	-	-	-	-	-	-	22.09	<30dBm	Pass
06	2437	13.02	12.88	12.71	12.62	12.52	12.4	12.31	12.24	22.02	<30dBm	Pass
09	2452	13.11	-	-	-	-	-	-	-	22.38	<30dBm	Pass

Note: Peak Power Output Value =Reading value on power meter + cable loss

4. Radiated Emission

4.1. Test Equipment

The following test equipment are used during the radiated emission test:


Test Site	Equipment		Manufacturer	Model No./Serial No.	Last Cal.
☒Site # 3	X	Loop Antenna	Teseq	HLA6120 / 26739	Jul., 2013
	X	Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2013
	X	Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2013
	X	Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2013
	X	Pre-Amplifier	Agilent	8447D/2944A09549	Sep., 2013
	X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2013
	X	Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2013
	X	Coaxial Cable	QuiTek	QTK-CABLE/ CAB5	Feb., 2013
	X	Controller	QuiTek	QTK-CONTROLLER/ CTRL3	N/A
	X	Coaxial Switch	Anritsu	MP59B/6200265729	N/A

Note: 1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.


2. The test instruments marked with “X” are used to measure the final test results.

4.2. Test Setup

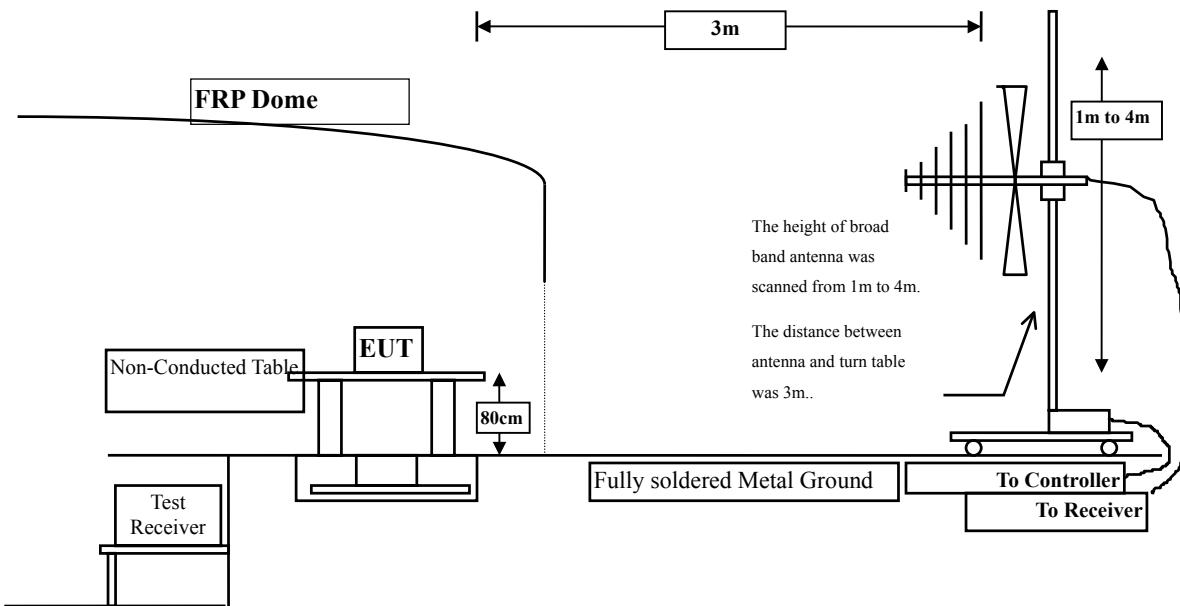Radiated Emission Below 1GHz



Radiated Emission Above 1GHz

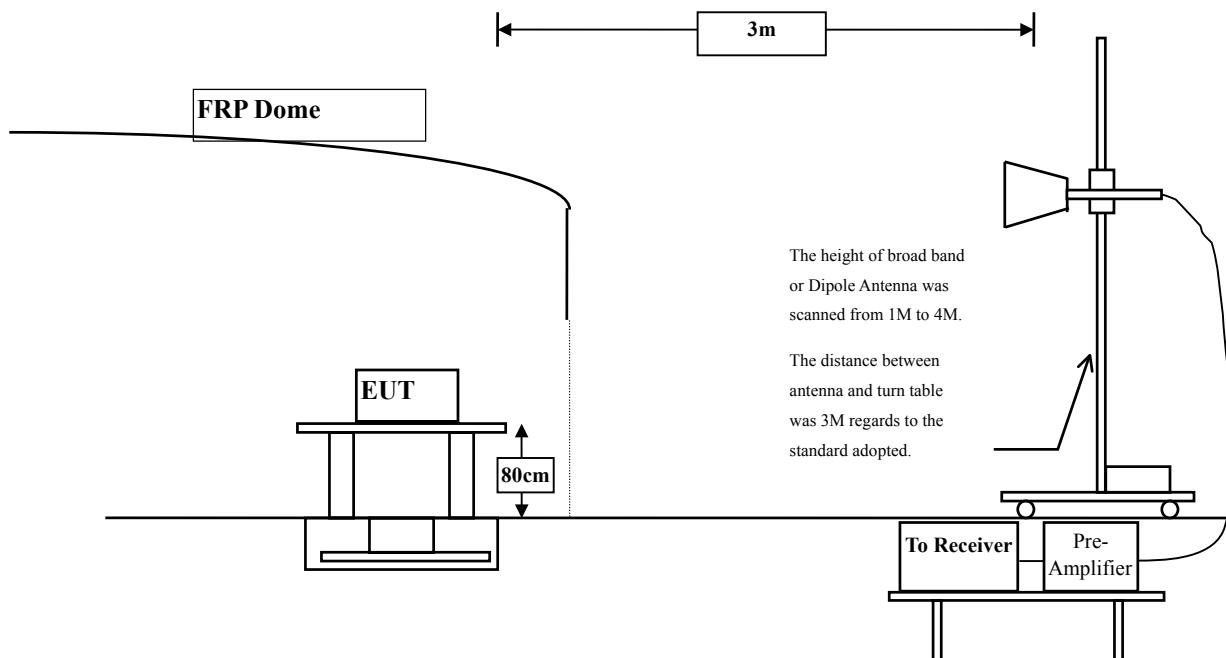

4.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks: E field strength (dB μ V/m) = 20 log E field strength (uV/m)

4.4. Test Procedure

The EUT was setup according to ANSI C63.10: 2009 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2009 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The frequency range from 9kHz to 10th harmonics is checked.

4.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

4.6. Test Result of Radiated Emission

Product : System Controller
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2412MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
4824.000	3.261	42.520	45.781	-28.219	74.000
7236.000	10.650	37.140	47.790	-26.210	74.000
9648.000	13.337	37.500	50.836	-23.164	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4824.000	6.421	41.910	48.331	-25.669	74.000
7236.000	11.495	37.670	49.165	-24.835	74.000
9648.000	13.807	37.770	51.576	-22.424	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : System Controller
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437 MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
4874.000	3.038	39.130	42.167	-31.833	74.000
7311.000	11.795	36.510	48.304	-25.696	74.000
9748.000	12.635	37.280	49.915	-24.085	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4874.000	5.812	39.300	45.111	-28.889	74.000
7311.000	12.630	37.180	49.809	-24.191	74.000
9748.000	13.126	37.590	50.716	-23.284	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : System Controller
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2462 MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
------------------	-------------------------	--------------------------------	--------------------------------------	--------------	-----------------------

Horizontal

Peak Detector:

4924.000	2.858	38.500	41.357	-32.643	74.000
7386.000	12.127	36.800	48.928	-25.072	74.000
9848.000	12.852	37.000	49.853	-24.147	74.000

Average Detector:

--

Vertical

Peak Detector:

4924.000	5.521	38.130	43.650	-30.350	74.000
7386.000	13.254	37.050	50.304	-23.696	74.000
9848.000	13.367	37.180	50.547	-23.453	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : System Controller
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
------------------	-------------------------	--------------------------------	--------------------------------------	--------------	-----------------------

Horizontal

Peak Detector:

4824.000	3.261	42.160	45.421	-28.579	74.000
7236.000	10.650	37.210	47.860	-26.140	74.000
9648.000	13.337	37.720	51.056	-22.944	74.000

Average Detector:

--

Vertical

Peak Detector:

4824.000	6.421	42.110	48.531	-25.469	74.000
7236.000	11.495	37.820	49.315	-24.685	74.000
9648.000	13.807	37.620	51.426	-22.574	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : System Controller
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437 MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
------------------	-------------------------	--------------------------------	--------------------------------------	--------------	-----------------------

Horizontal

Peak Detector:

4874.000	3.038	38.450	41.487	-32.513	74.000
7311.000	11.795	37.310	49.104	-24.896	74.000
9748.000	12.635	37.230	49.865	-24.135	74.000

Average Detector:

--

Peak Detector:

4874.000	5.812	38.140	43.951	-30.049	74.000
7311.000	12.630	37.970	50.599	-23.401	74.000
9748.000	13.126	37.330	50.456	-23.544	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : System Controller
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2462 MHz)

Frequency MHz	Correct Factor	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
------------------	-------------------	--------------------------------	--------------------------------------	--------------	-----------------------

Horizontal

Peak Detector:

4924.000	2.858	38.300	41.157	-32.843	74.000
7386.000	12.127	36.590	48.718	-25.282	74.000
9848.000	12.852	36.910	49.763	-24.237	74.000

Average Detector:

--

Vertical

Peak Detector:

4924.000	5.521	38.610	44.130	-29.870	74.000
7386.000	13.254	37.640	50.894	-23.106	74.000
9848.000	13.367	37.510	50.877	-23.123	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : System Controller
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n MCS0 7.2Mbps 20M-BW)(2412MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m

Horizontal

Peak Detector:

4824.000	3.261	43.010	46.271	-27.729	74.000
7236.000	10.650	37.160	47.810	-26.190	74.000
9648.000	13.337	37.310	50.646	-23.354	74.000

Average Detector:

--

Vertical

Peak Detector:

4824.000	6.421	42.350	48.771	-25.229	74.000
7236.000	11.495	37.560	49.055	-24.945	74.000
9648.000	13.807	37.260	51.066	-22.934	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : System Controller
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n MCS0 7.2Mbps 20M-BW) (2437 MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
------------------	-------------------------	--------------------------------	--------------------------------------	--------------	-----------------------

Horizontal

Peak Detector:

4874.000	3.038	38.390	41.427	-32.573	74.000
7311.000	11.795	36.680	48.474	-25.526	74.000
9748.000	12.635	37.350	49.985	-24.015	74.000

Average Detector:

--

Vertical

Peak Detector:

4874.000	5.812	38.680	44.491	-29.509	74.000
7311.000	12.630	39.020	51.649	-22.351	74.000
9748.000	13.126	37.130	50.256	-23.744	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : System Controller
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n MCS0 7.2Mbps 20M-BW) (2462 MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
------------------	-------------------------	--------------------------------	--------------------------------------	--------------	-----------------------

Horizontal

Peak Detector:

4924.000	2.858	38.380	41.237	-32.763	74.000
7386.000	12.127	36.690	48.818	-25.182	74.000
9848.000	12.852	37.160	50.013	-23.987	74.000

Average Detector:

--

Vertical

Peak Detector:

4924.000	5.521	38.220	43.740	-30.260	74.000
7386.000	13.254	38.460	51.714	-22.286	74.000
9848.000	13.367	37.200	50.567	-23.433	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : System Controller
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit (802.11n MCS0 15Mbps 40M-BW)(2422MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
------------------	-------------------------	--------------------------------	--------------------------------------	--------------	-----------------------

Horizontal

Peak Detector:

4844.000	3.171	39.450	42.621	-31.379	74.000
7266.000	11.162	36.810	47.972	-26.028	74.000
9688.000	12.964	37.250	50.215	-23.785	74.000

Average Detector:

--

Vertical

Peak Detector:

4844.000	6.178	39.500	45.678	-28.322	74.000
7266.000	11.982	36.640	48.622	-25.378	74.000
9688.000	13.507	37.180	50.688	-23.312	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : System Controller
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit (802.11n MCS0 15Mbps 40M-BW) (2437 MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m

Horizontal

Peak Detector:

4874.000	3.038	38.540	41.577	-32.423	74.000
7311.000	11.795	36.520	48.314	-25.686	74.000
9748.000	12.635	36.750	49.385	-24.615	74.000

Average Detector:

--

Vertical

Peak Detector:

4874.000	5.812	38.340	44.151	-29.849	74.000
7311.000	12.630	36.760	49.389	-24.611	74.000
9748.000	13.126	37.430	50.556	-23.444	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : System Controller
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit (802.11n MCS0 15Mbps 40M-BW)(2452 MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m

Horizontal

Peak Detector:

4904.000	2.914	38.200	41.115	-32.885	74.000
7356.000	11.995	36.050	48.044	-25.956	74.000
9808.000	12.475	37.090	49.565	-24.435	74.000

Average Detector:

--

Vertical

Peak Detector:

4904.000	5.530	38.170	43.701	-30.299	74.000
7356.000	13.005	36.150	49.154	-24.846	74.000
9808.000	12.901	37.280	50.181	-23.819	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : System Controller
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)(2437 MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
138.640	-10.435	40.533	30.098	-13.402	43.500
288.020	-4.579	35.160	30.581	-15.419	46.000
406.360	-2.500	33.369	30.869	-15.131	46.000
524.700	1.801	31.578	33.379	-12.621	46.000
709.000	3.458	30.353	33.811	-12.189	46.000
974.780	6.652	33.796	40.448	-13.552	54.000
Vertical					
130.880	-4.239	36.984	32.745	-10.755	43.500
191.020	-10.420	40.820	30.400	-13.100	43.500
371.440	-2.737	38.327	35.590	-10.410	46.000
528.580	-0.462	28.574	28.112	-17.888	46.000
769.140	2.923	32.497	35.420	-10.580	46.000
949.560	6.615	33.375	39.990	-6.010	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : System Controller
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)(2437 MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
95.960	-7.820	40.873	33.053	-10.447	43.500
309.360	-3.740	38.127	34.387	-11.613	46.000
443.220	-2.738	41.370	38.632	-7.368	46.000
600.360	3.977	35.616	39.593	-6.407	46.000
749.740	3.320	32.012	35.332	-10.668	46.000
881.660	6.307	33.735	40.042	-5.958	46.000
Vertical					
165.800	-7.719	42.363	34.644	-8.856	43.500
278.320	-8.739	44.550	35.811	-10.189	46.000
371.440	-2.737	37.472	34.735	-11.265	46.000
528.580	-0.462	28.596	28.134	-17.866	46.000
666.320	-1.809	33.147	31.339	-14.661	46.000
920.460	5.517	30.839	36.356	-9.644	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : System Controller
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n MCS0 7.2Mbps 20M-BW)(2437 MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
70.740	-12.921	41.563	28.642	-11.358	40.000
148.340	-10.254	42.403	32.149	-11.351	43.500
322.940	-4.442	33.756	29.314	-16.686	46.000
516.940	1.654	29.758	31.412	-14.588	46.000
747.800	3.296	30.735	34.031	-11.969	46.000
920.460	6.467	32.724	39.191	-6.809	46.000
Vertical					
142.520	-6.267	38.732	32.465	-11.035	43.500
303.540	-6.794	34.979	28.185	-17.815	46.000
385.020	-2.820	34.415	31.595	-14.405	46.000
600.360	-2.833	29.712	26.879	-19.121	46.000
749.740	2.510	31.100	33.610	-12.390	46.000
974.780	2.432	33.996	36.428	-17.572	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : System Controller
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit (802.11n MCS0 15Mbps 40M-BW)(2437 MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
95.960	-7.820	39.361	31.541	-11.959	43.500
288.020	-4.579	36.803	32.224	-13.776	46.000
433.520	-1.972	37.440	35.468	-10.532	46.000
644.980	1.552	27.338	28.890	-17.110	46.000
747.800	3.296	30.076	33.372	-12.628	46.000
972.840	6.802	27.838	34.640	-19.360	54.000
Vertical					
177.440	-8.339	41.848	33.509	-9.991	43.500
371.440	-2.737	36.733	33.996	-12.004	46.000
503.360	-0.852	38.218	37.366	-8.634	46.000
695.420	1.878	29.141	31.019	-14.981	46.000
817.640	3.272	32.576	35.848	-10.152	46.000
961.200	7.260	29.401	36.661	-17.339	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

5. RF antenna conducted test


5.1. Test Equipment

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2013
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2013
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2013

Note: 1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with "X" are used to measure the final test results.

5.2. Test Setup

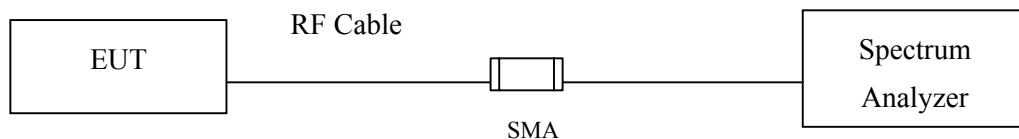RF antenna Conducted Measurement:



5.3. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.4. Test Procedure

The EUT was tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.

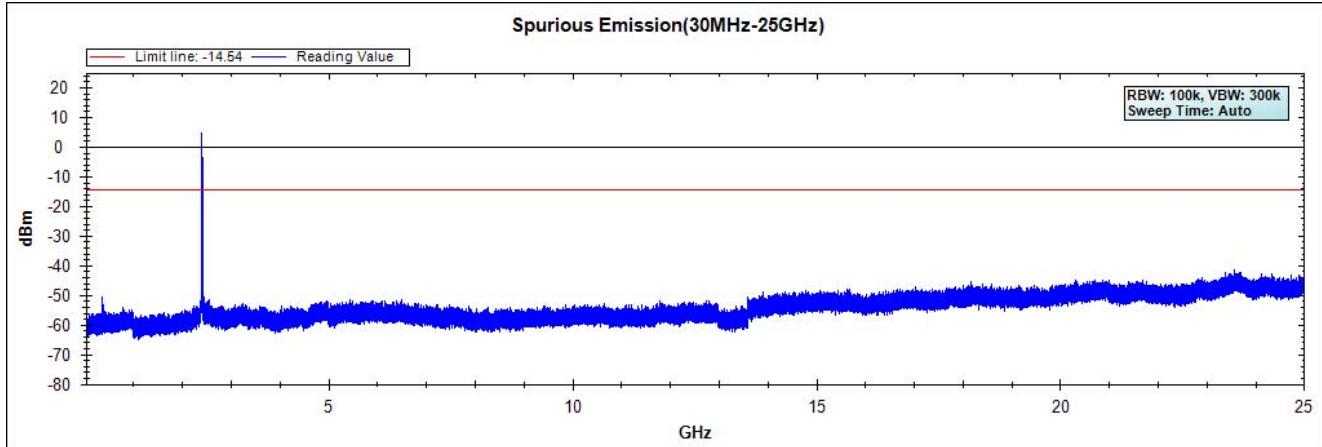
5.5. Uncertainty

The measurement uncertainty
Conducted is defined as $\pm 1.27\text{dB}$


5.6. Test Result of RF antenna conducted test

Product : System Controller
Test Item : RF antenna conducted test
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11b 1Mbps)


Channel 01 (2412MHz) 30MHz-25GHz



Channel 06 (2437MHz) 30MHz -25GHz

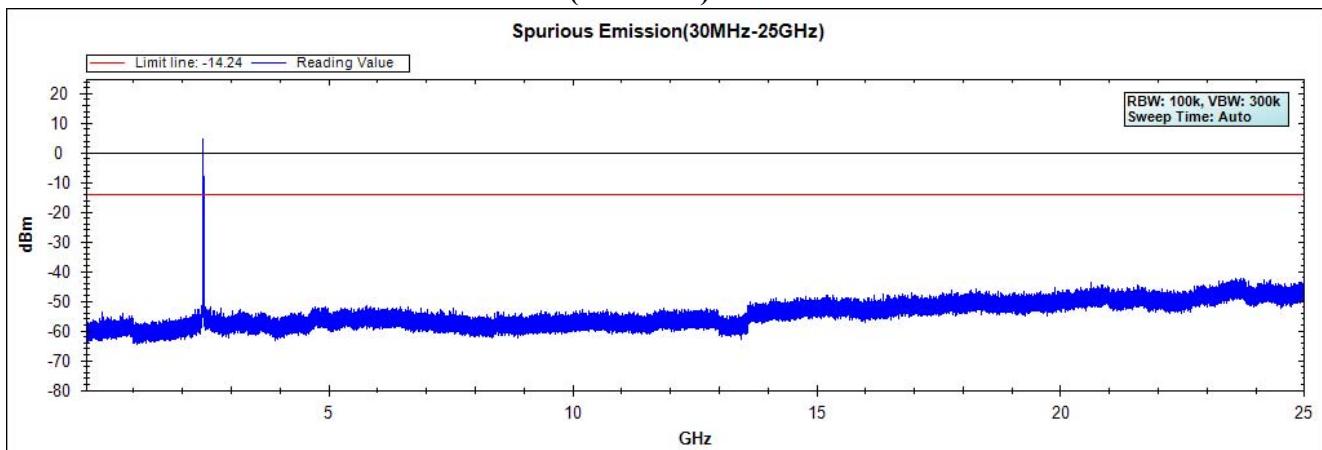


Channel 11 (2462MHz) 30MHz -25GHz

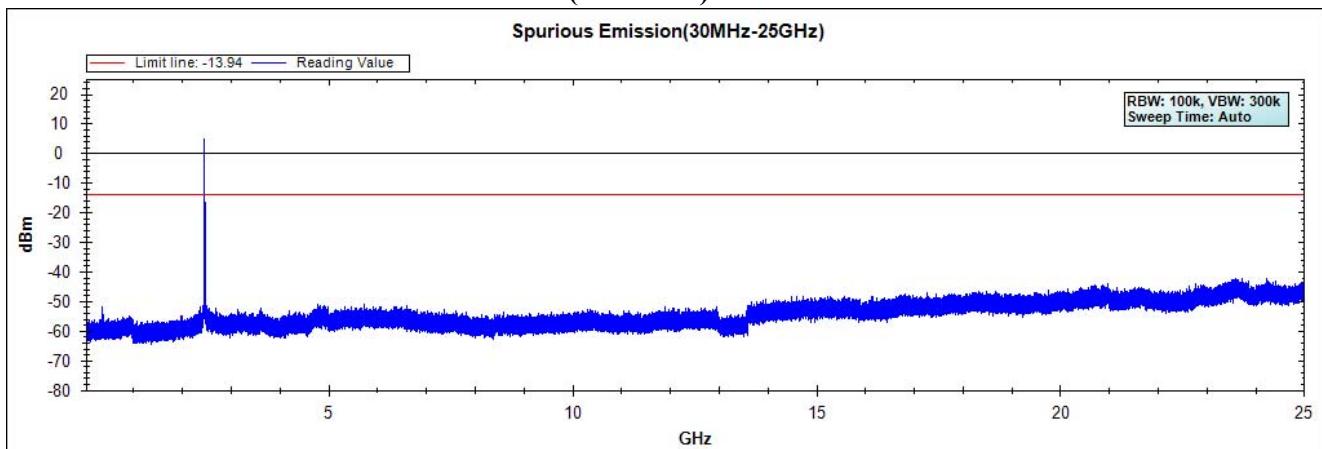


Note: The above test pattern is synthesized by multiple of the frequency range.

Product : System Controller
Test Item : RF Antenna Conducted Spurious
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11g 6Mbps)

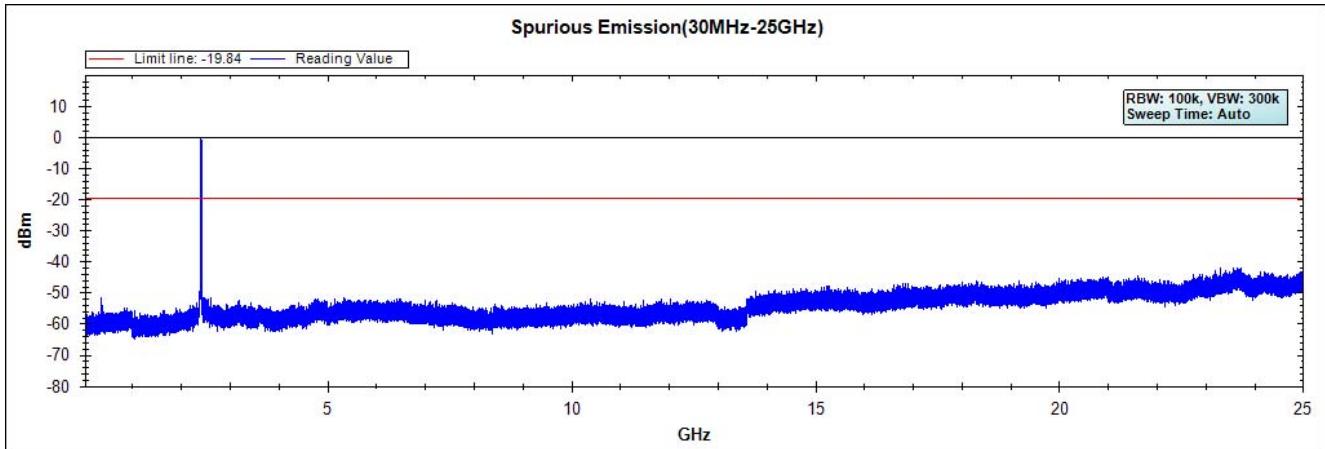
Channel 01 (2412MHz) 30MHz-25GHz



Channel 06 (2437MHz) 30MHz -25GHz

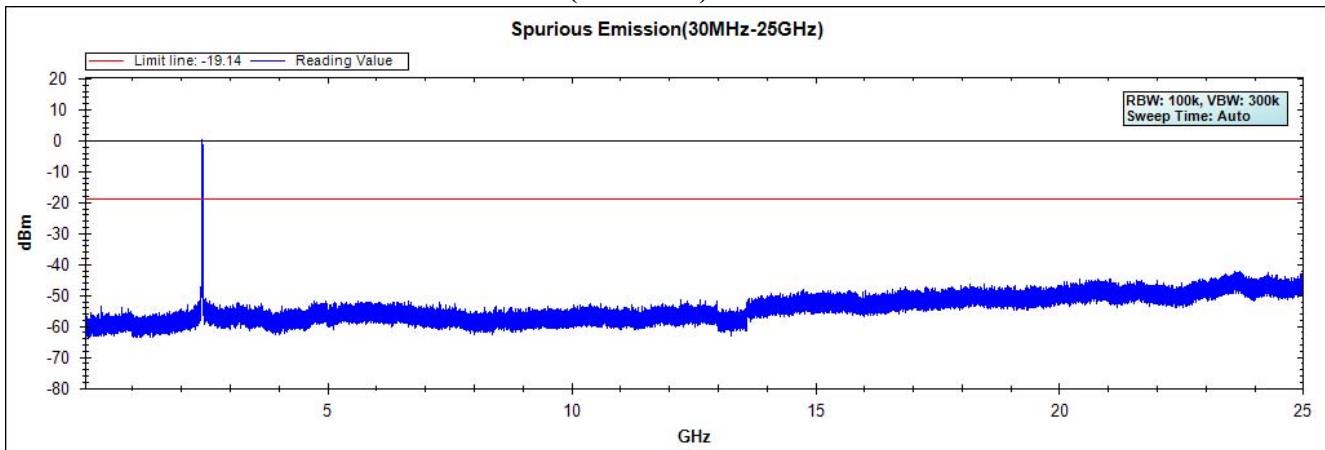


Channel 11 (2462MHz) 30MHz -25GHz

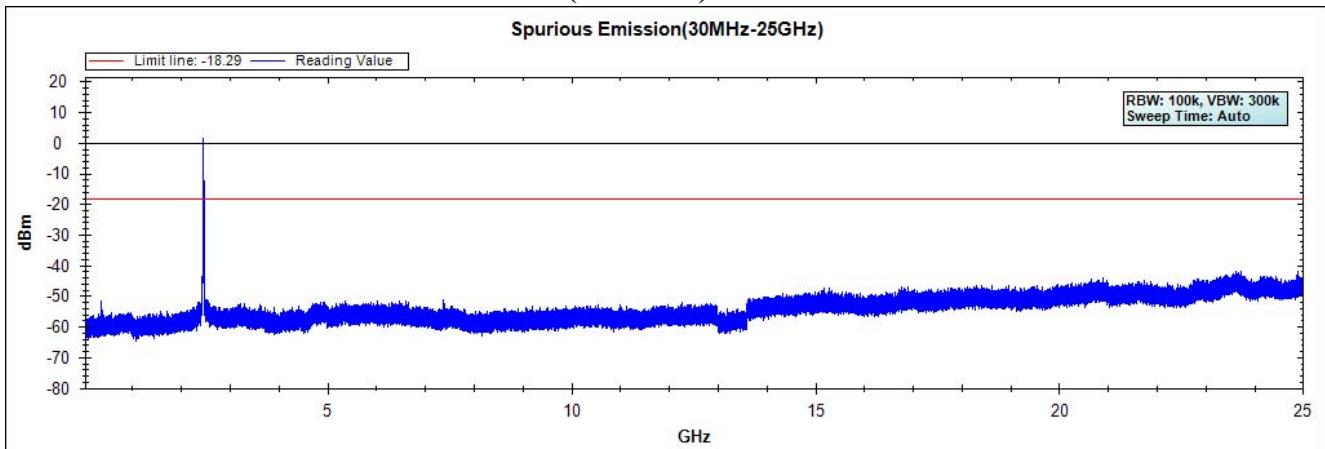


Note: The above test pattern is synthesized by multiple of the frequency range.

Product : System Controller
Test Item : RF Antenna Conducted Spurious
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n MCS0 7.2Mbps 20M-BW)

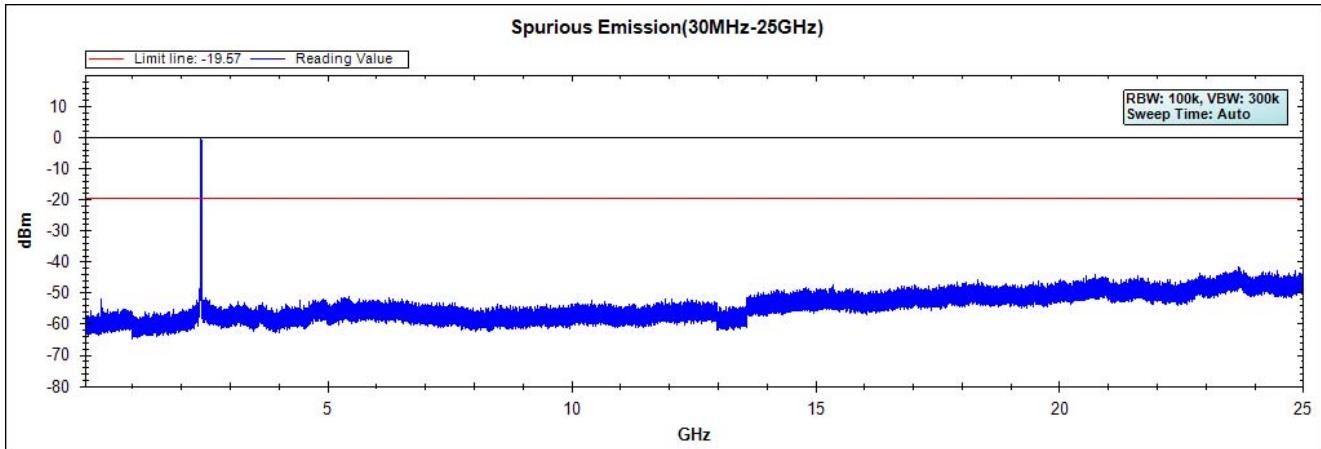
Channel 01 (2412MHz) 30MHz-25GHz



Channel 06 (2437MHz) 30MHz -25GHz

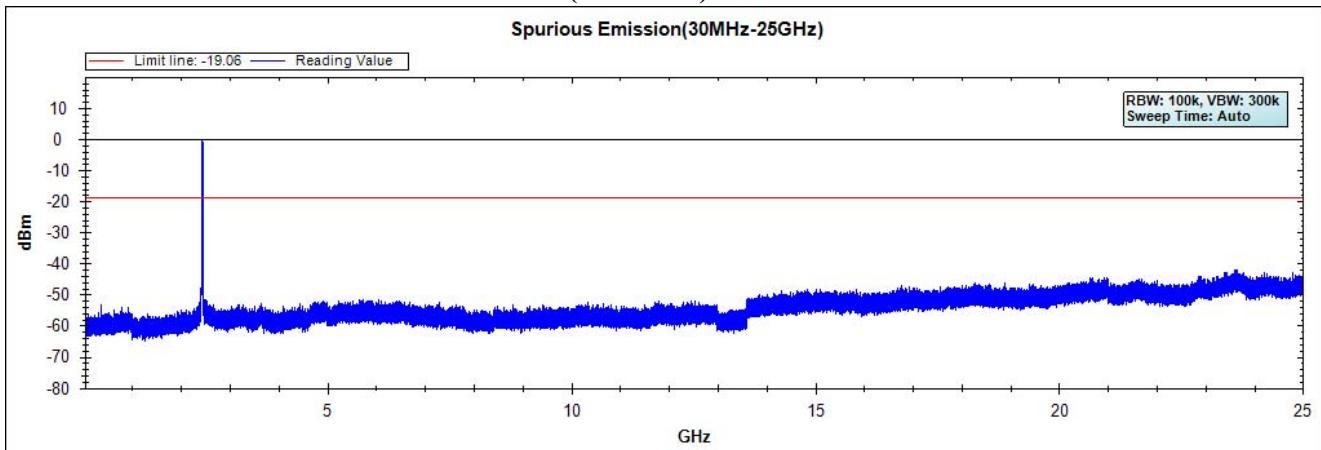


Channel 11 (2462MHz) 30MHz -25GHz

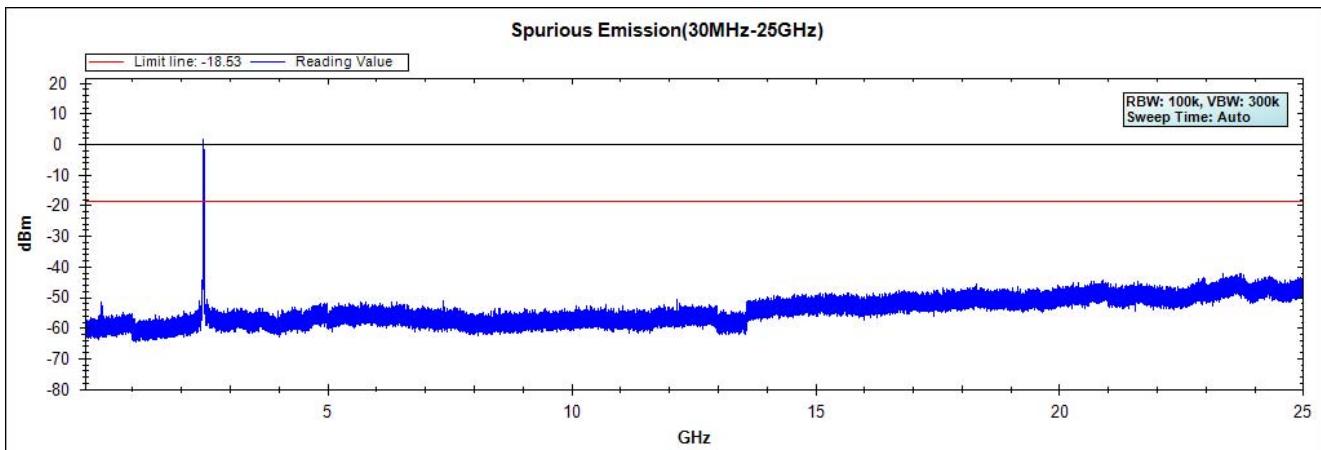


Note: The above test pattern is synthesized by multiple of the frequency range.

Product : System Controller
Test Item : RF Antenna Conducted Spurious
Test Site : No.3 OATS
Test Mode : Mode 4: Transmit (802.11n MCS0 15Mbps 40M-BW)

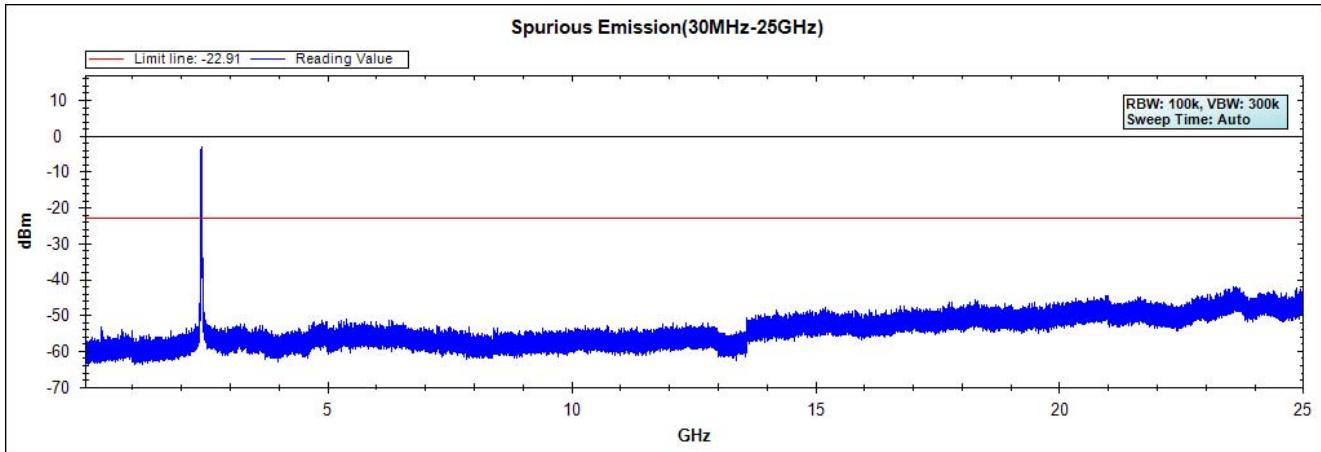
Channel 01 (2422MHz) 30MHz-25GHz



Channel 04 (2437MHz) 30MHz -25GHz

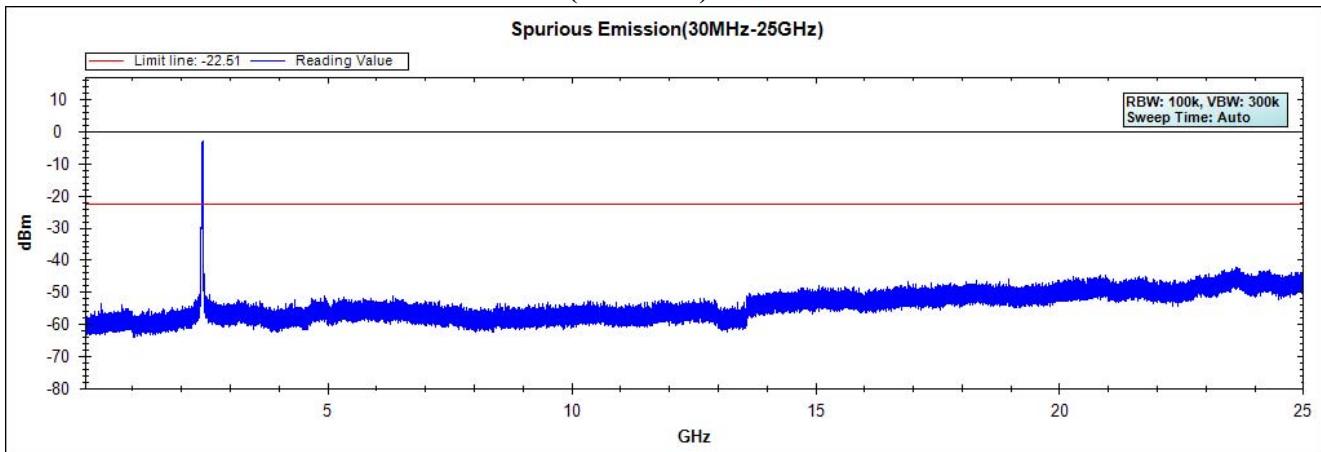

Channel 07 (2452MHz) 30MHz -25GHz

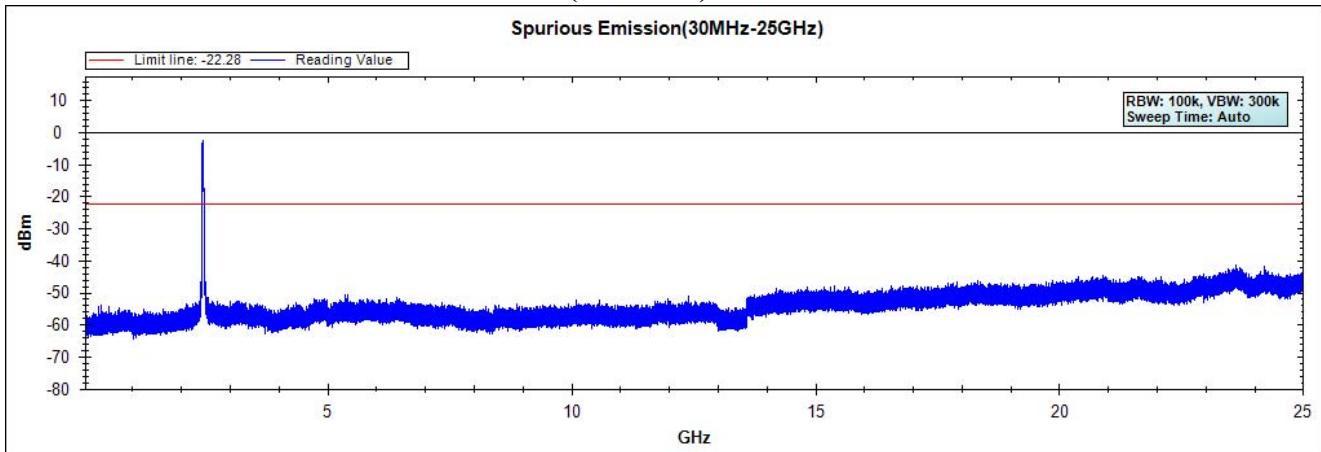

Note: The above test pattern is synthesized by multiple of the frequency range.

6. Band Edge

6.1. Test Equipment

RF Radiated Measurement:

The following test equipments are used during the band edge tests:


Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X Site # 3	Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2013
	X Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2013
	Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2013
	X Pre-Amplifier	Agilent	8447D/2944A09549	Sep., 2013
	X Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2013
	Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2013
	X Coaxial Cable	QuiTek	QTK-CABLE/ CAB5	Feb., 2013
	X Controller	QuiTek	QTK-CONTROLLER/ CTRL3	N/A
	X Coaxial Switch	Anritsu	MP59B/6200265729	N/A

Note:

1. All instruments are calibrated every one year.
2. The test instruments marked by "X" are used to measure the final test results.

6.2. Test Setup

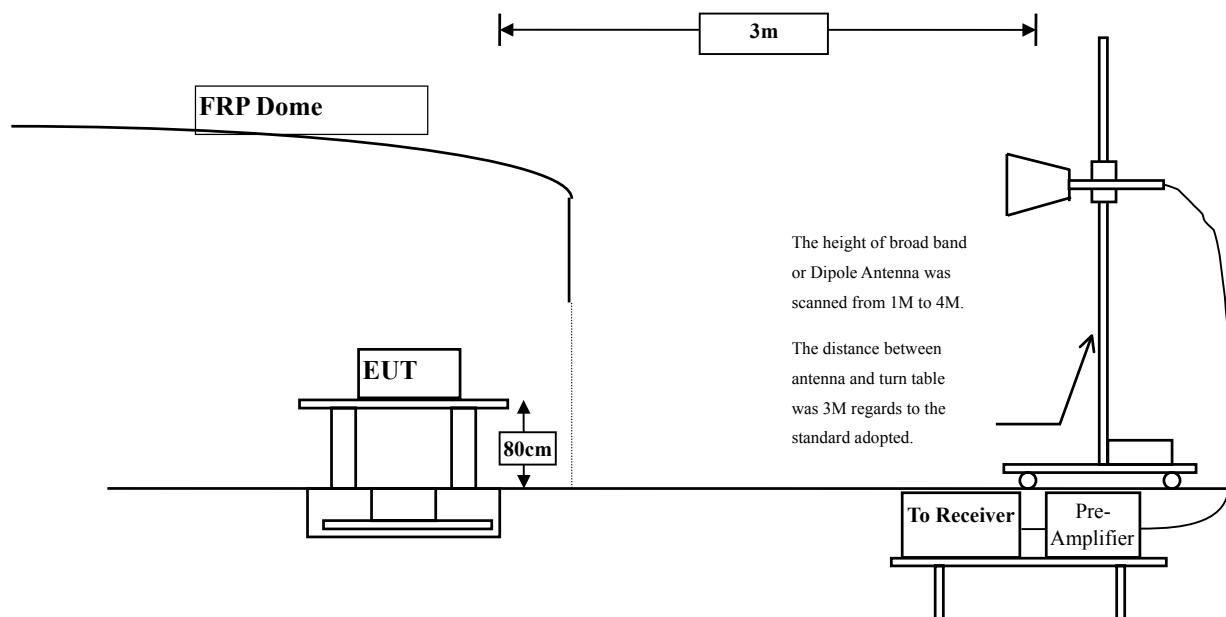RF Radiated Measurement:



6.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

6.4. Test Procedure

The EUT was setup according to ANSI C63.10: 2009 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2009 on radiated measurement.

6.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

6.6. Test Result of Band Edge

Product : System Controller
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2386.000	31.493	25.296	56.790	74.00	54.00	Pass
01 (Peak)	2390.000	31.509	23.719	55.228	74.00	54.00	Pass
01 (Peak)	2400.000	31.561	31.661	63.222	81.168	73.211	Pass
01 (Peak)	2412.000	31.639	69.530	101.168	--	--	--
01 (Average)	2390.000	31.509	12.876	44.385	74.00	54.00	Pass
01 (Average)	2400.000	31.561	22.719	54.280	81.168	73.211	Pass
01 (Average)	2412.800	31.645	61.567	93.211	--	--	--

Figure Channel 01:

Horizontal (Peak)


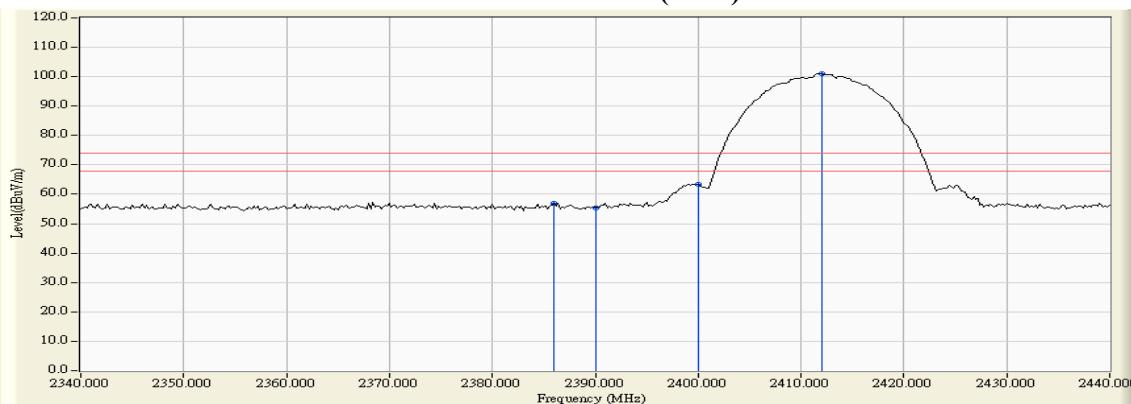


Figure Channel 01:

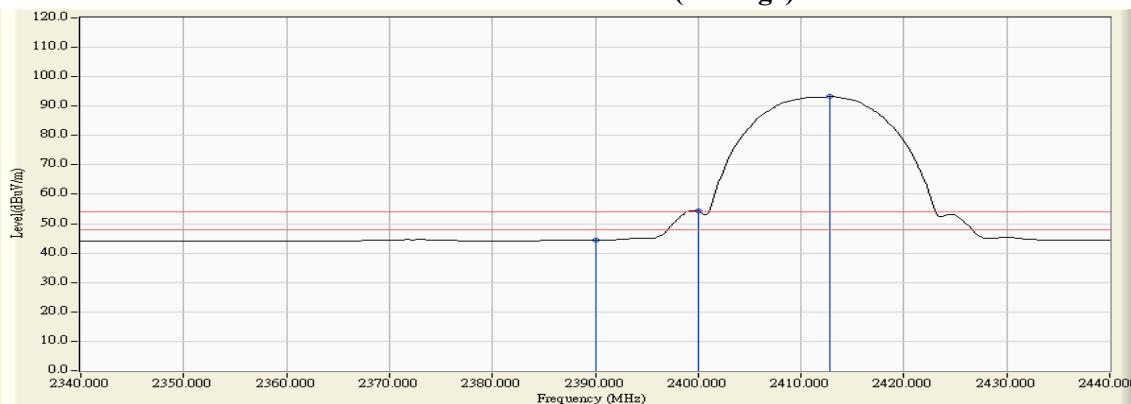Horizontal (Average)



Note:1. All readings above 1GHz are performed with peak and/or average measurements as necessary.

2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : System Controller
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2371.000	31.003	26.614	57.617	74.00	54.00	Pass
01 (Peak)	2390.000	30.915	25.046	55.961	74.00	54.00	Pass
01 (Peak)	2400.000	30.912	32.943	63.855	81.244	73.251	Pass
01 (Peak)	2411.800	30.948	70.276	101.224	--	--	--
01 (Average)	2390.000	30.915	12.984	43.899	74.00	54.00	Pass
01 (Average)	2400.000	30.912	23.399	54.311	81.244	73.251	Pass
01 (Average)	2412.800	30.955	62.296	93.251	--	--	--

Figure Channel 01:

Vertical (Peak)


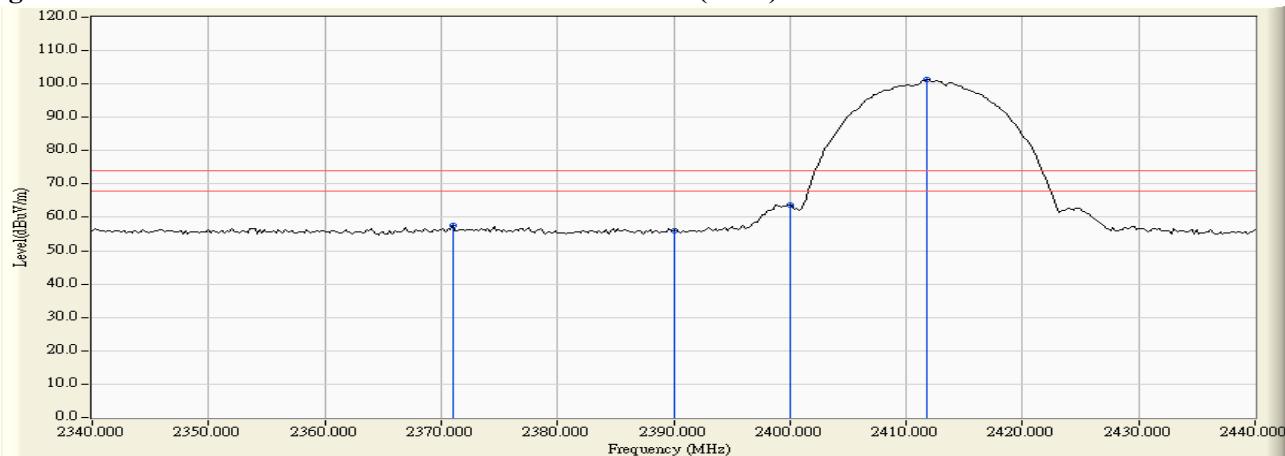


Figure Channel 01:

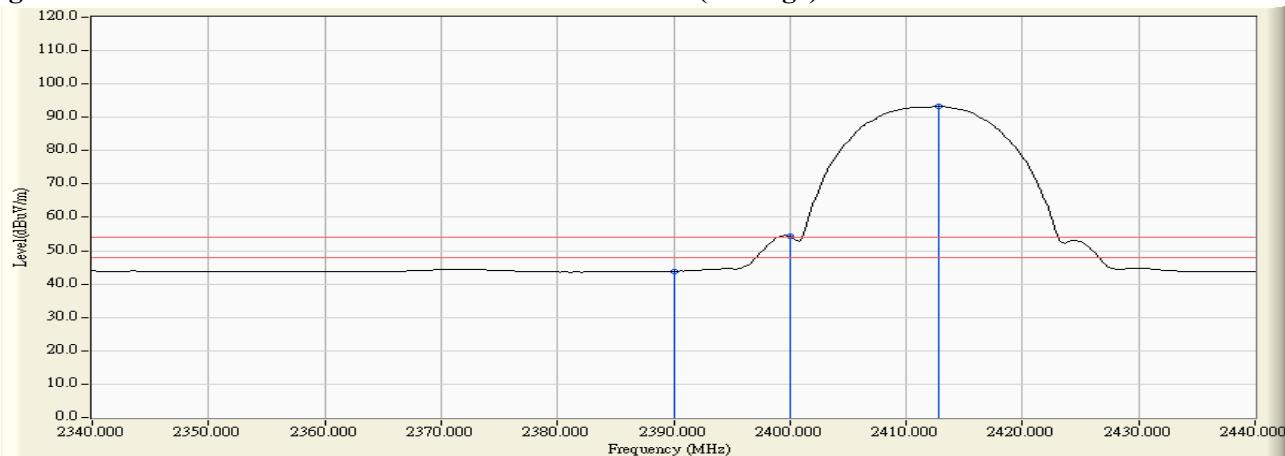Vertical (Average)



Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : System Controller
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2461.700	32.017	68.032	100.049	--	--	--
11 (Peak)	2483.500	32.182	25.053	57.235	74.00	54.00	Pass
11 (Peak)	2487.700	32.213	25.568	57.782	74.00	54.00	Pass
11 (Average)	2462.700	32.025	59.997	92.022	--	--	--
11 (Average)	2483.500	32.182	12.775	44.957	74.00	54.00	Pass

Figure Channel 11: Horizontal (Peak)


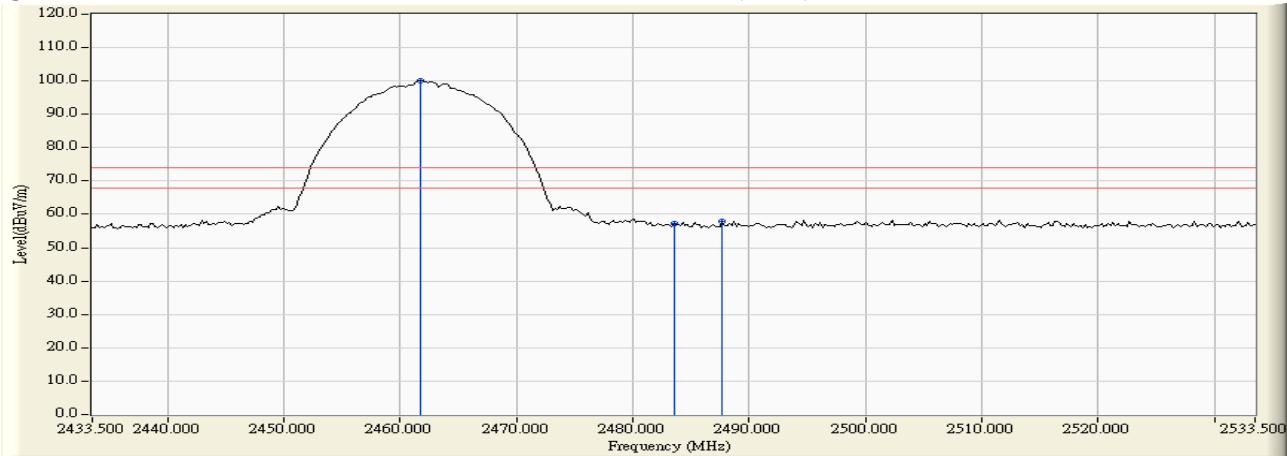


Figure Channel 11: Horizontal (Average)

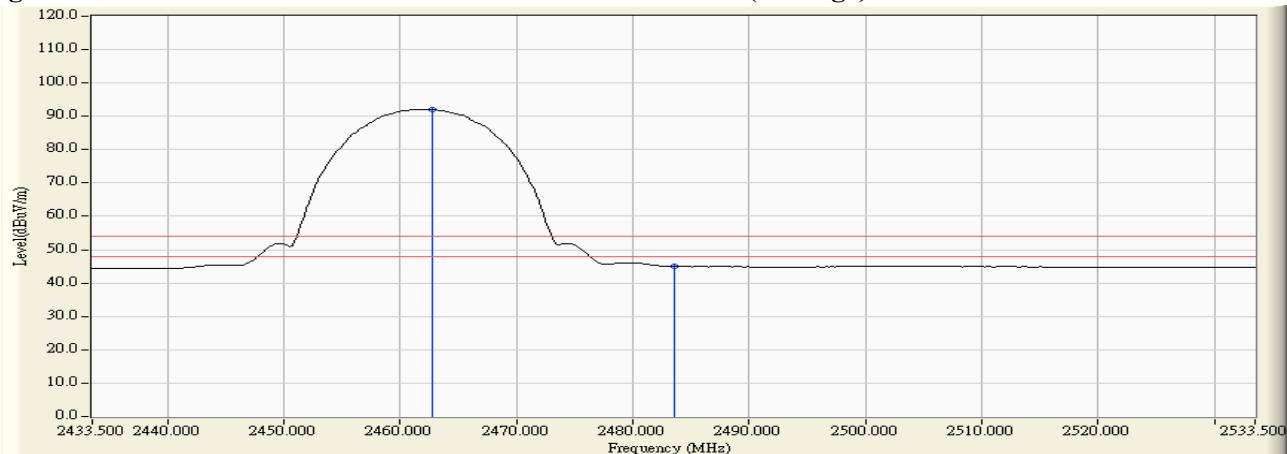

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : System Controller
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2461.700	31.288	68.504	99.792	--	--	--
11 (Peak)	2483.500	31.435	24.901	56.336	74.00	54.00	Pass
11 (Average)	2462.700	31.295	60.391	91.686	--	--	--
11 (Average)	2483.500	31.435	12.722	44.157	74.00	54.00	Pass

Figure Channel 11:

Vertical (Peak)


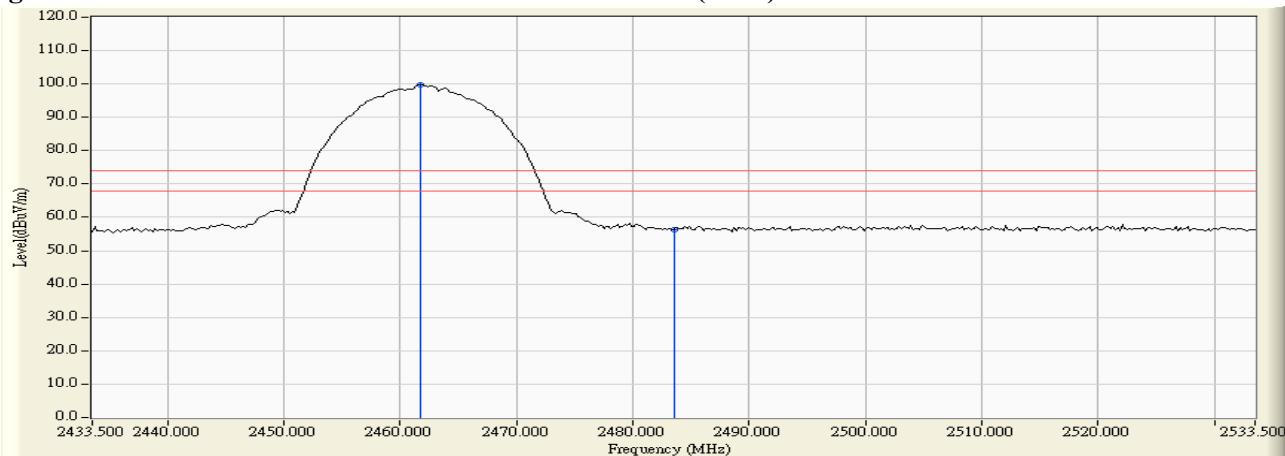


Figure Channel 11:

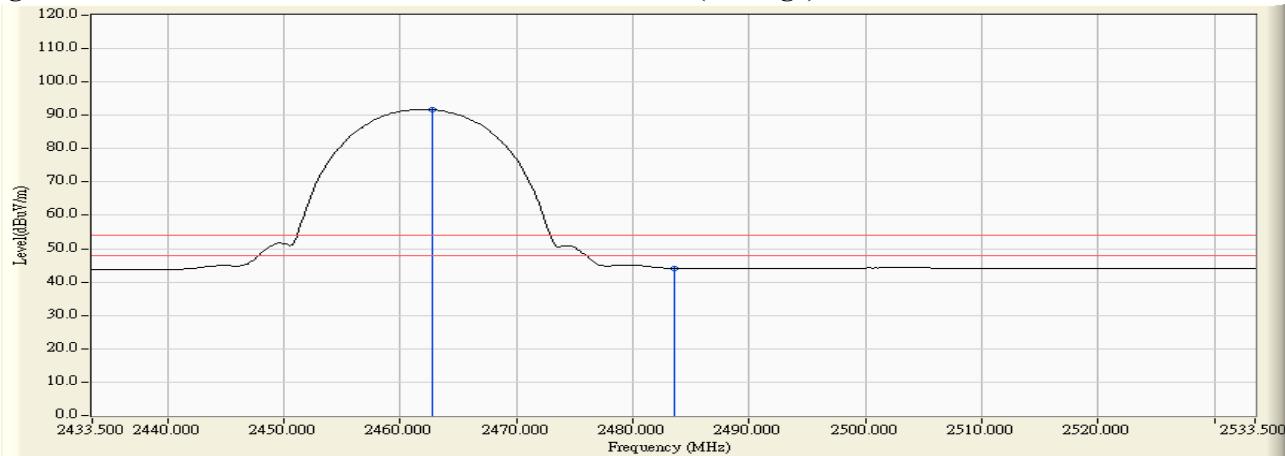Vertical (Average)



Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : System Controller
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2389.600	31.508	27.852	59.360	74.00	54.00	Pass
01 (Peak)	2390.000	31.509	26.733	58.242	74.00	54.00	Pass
01 (Peak)	2400.000	31.561	45.408	76.969	79.497	70.744	Pass
01 (Peak)	2406.400	31.602	67.896	99.497	--	--	--
01 (Average)	2390.000	31.509	14.454	45.963	74.00	54.00	Pass
01 (Average)	2400.000	31.561	22.601	54.162	79.497	70.744	Pass
01 (Average)	2406.400	31.602	59.143	90.744	--	--	--

Figure Channel 01:

Horizontal (Peak)


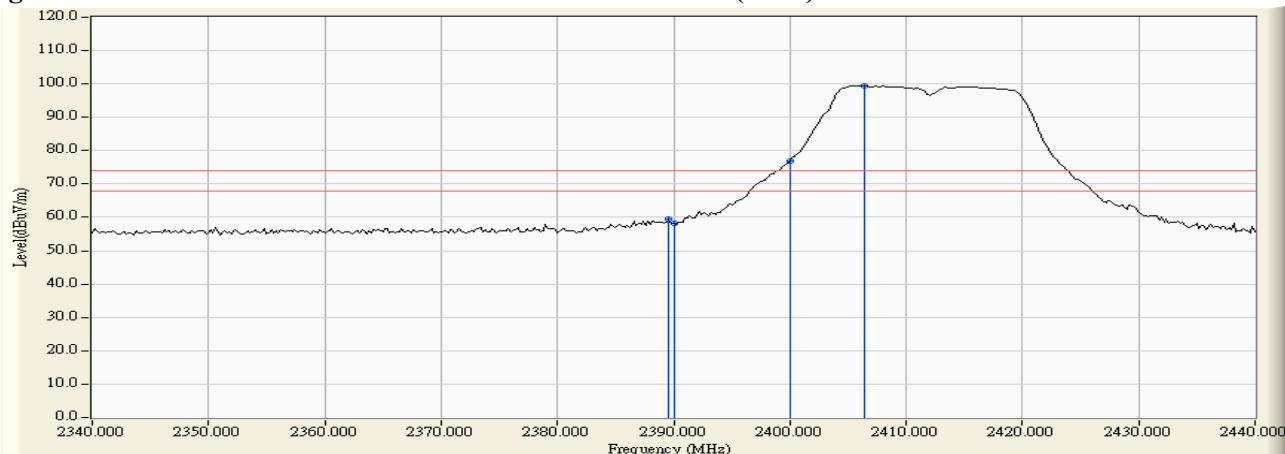


Figure Channel 01:

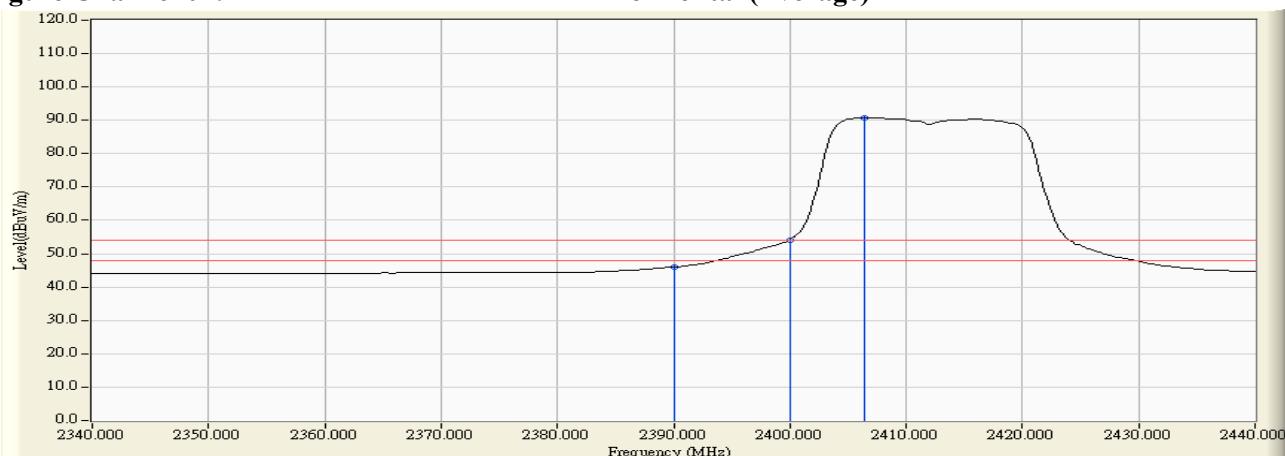Horizontal (Average)



Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : System Controller
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2388.400	30.923	28.211	59.134	74.00	54.00	Pass
01 (Peak)	2390.000	30.915	26.922	57.837	74.00	54.00	Pass
01 (Peak)	2400.000	30.912	46.030	76.942	79.507	70.736	Pass
01 (Peak)	2406.400	30.930	68.577	99.507	--	--	--
01 (Average)	2390.000	30.915	14.887	45.802	74.00	54.00	Pass
01 (Average)	2400.000	30.912	23.197	54.109	79.507	70.736	Pass
01 (Average)	2406.400	30.930	59.806	90.736	--	--	--

Figure Channel 01:

Vertical (Peak)


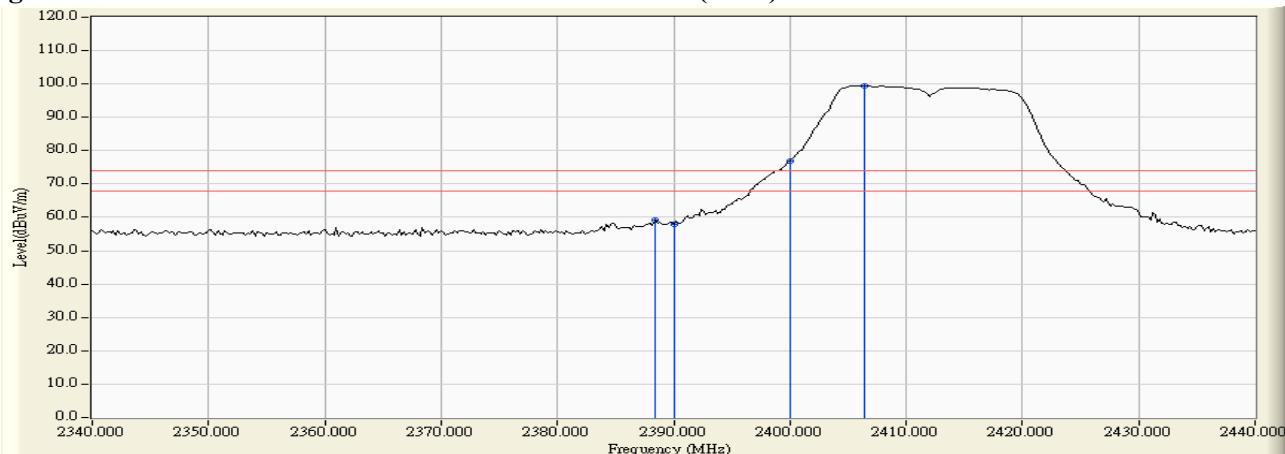


Figure Channel 01:

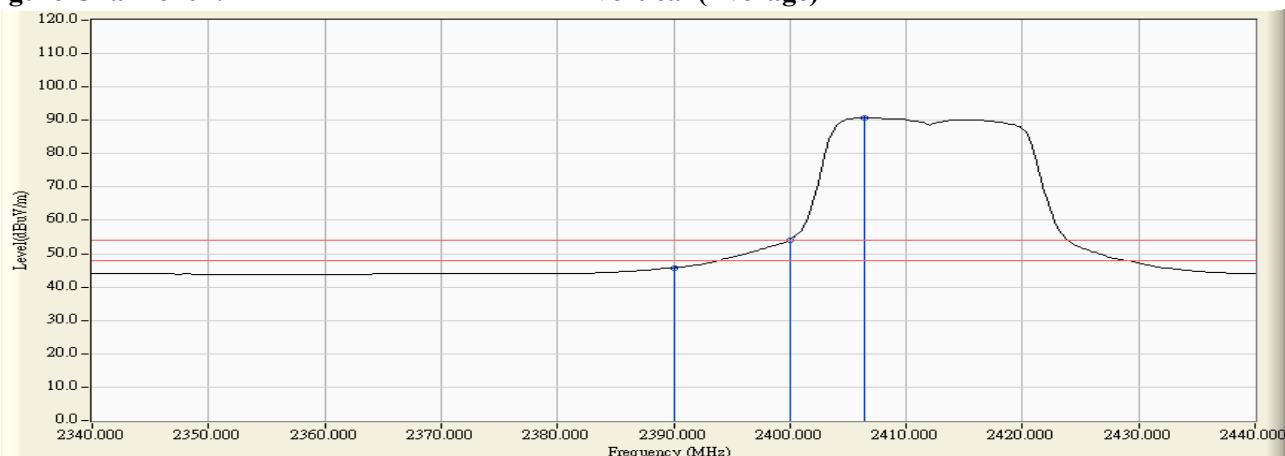Vertical (Average)



Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : System Controller
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2458.900	31.997	65.521	97.517	--	--	--
11 (Peak)	2483.500	32.182	24.848	57.030	74.00	54.00	Pass
11 (Peak)	2491.500	32.243	27.309	59.552	74.00	54.00	Pass
11 (Average)	2467.300	32.059	56.515	88.574	--	--	--
11 (Average)	2483.500	32.182	13.573	45.755	74.00	54.00	Pass

Figure Channel 11:

Horizontal (Peak)


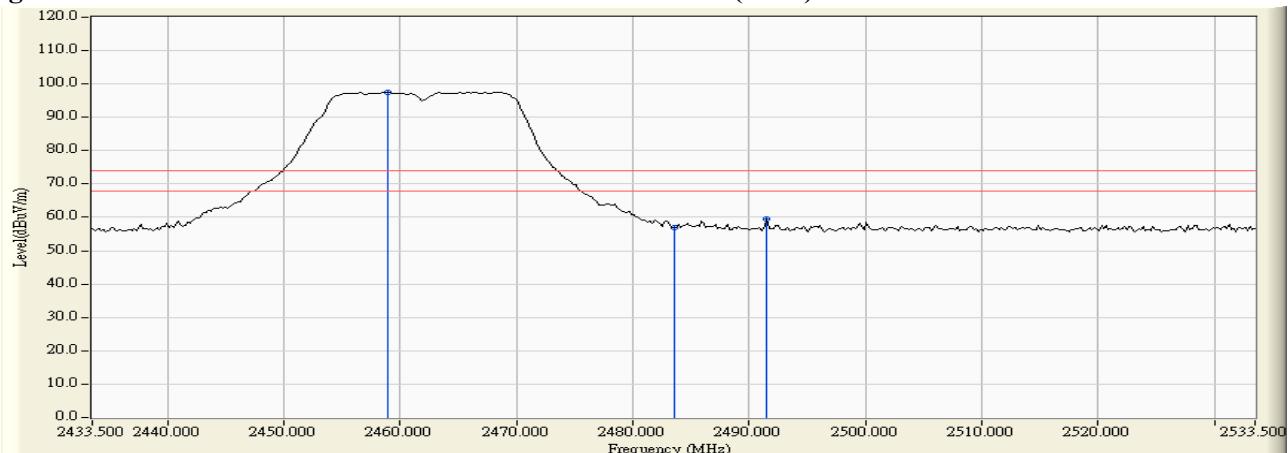


Figure Channel 11:

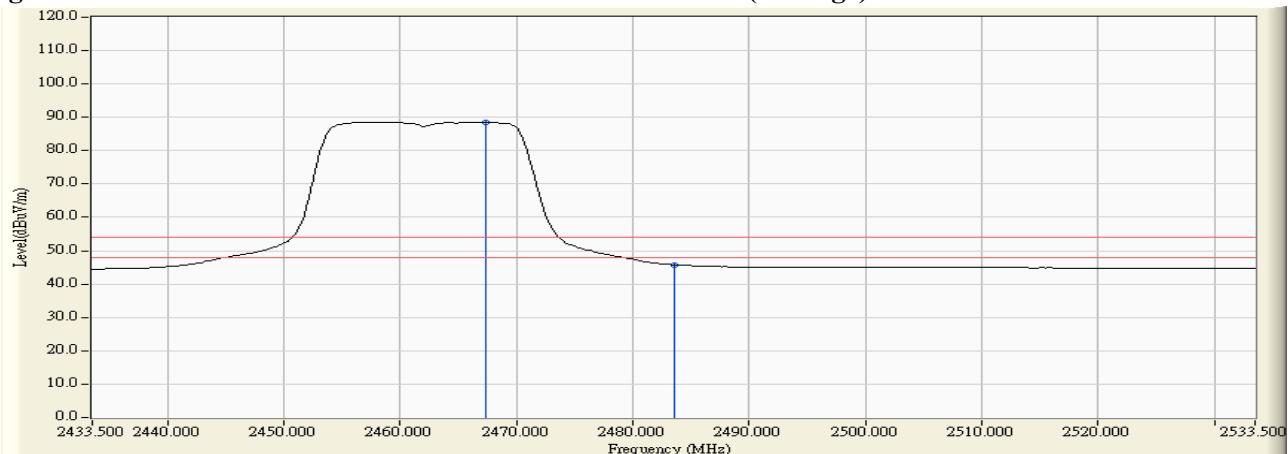Horizontal (Average)





Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : System Controller
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2458.700	31.268	66.009	97.277	--	--	--
11 (Peak)	2483.500	31.435	24.748	56.183	74.00	54.00	Pass
11 (Peak)	2486.300	31.454	25.880	57.334	74.00	54.00	
11 (Average)	2459.500	31.273	57.075	88.348	--	--	--
11 (Average)	2483.500	31.435	13.415	44.850	74.00	54.00	Pass

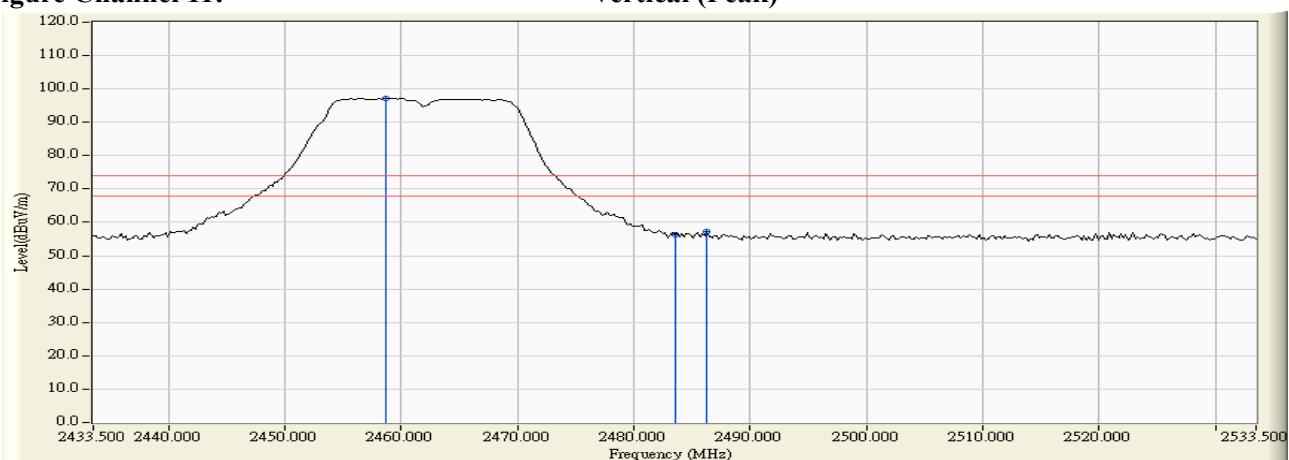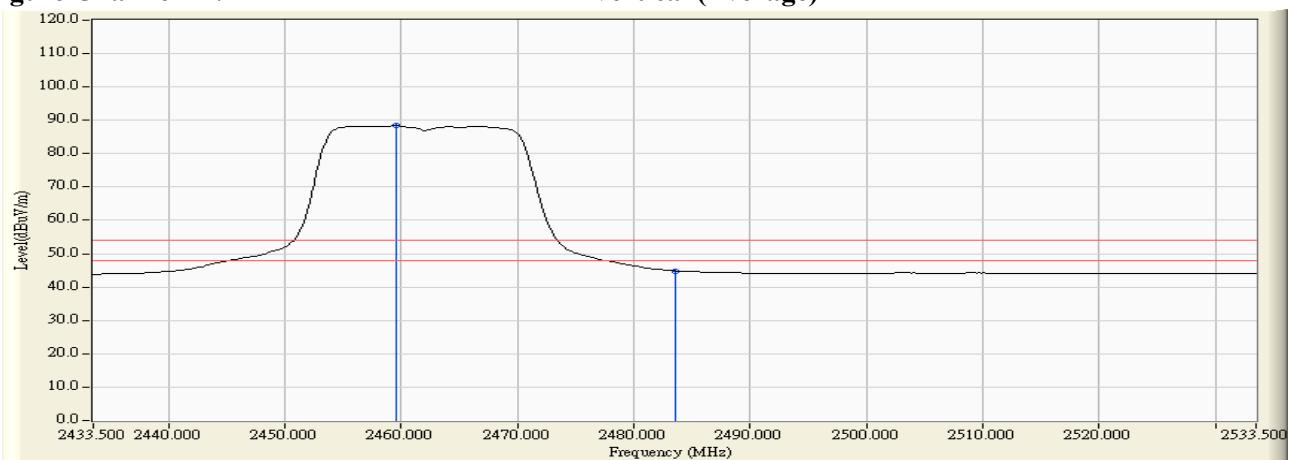Figure Channel 11:
Vertical (Peak)

Figure Channel 11:
Vertical (Average)


Note:1. All readings above 1GHz are performed with peak and/or average measurements as necessary.

2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : System Controller
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n MCS0 7.2Mbps 20M-BW)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2390.000	31.509	30.809	62.318	74.00	54.00	Pass
01 (Peak)	2400.000	31.561	46.403	77.964	80.508	70.710	Pass
01 (Peak)	2408.800	31.617	68.891	100.508	--	--	--
01 (Average)	2390.000	31.509	14.998	46.507	74.00	54.00	Pass
01 (Average)	2400.000	31.561	23.527	55.088	80.508	70.710	Pass
01 (Average)	2406.800	31.604	59.106	90.710	--	--	--

Figure Channel 01:

Horizontal (Peak)


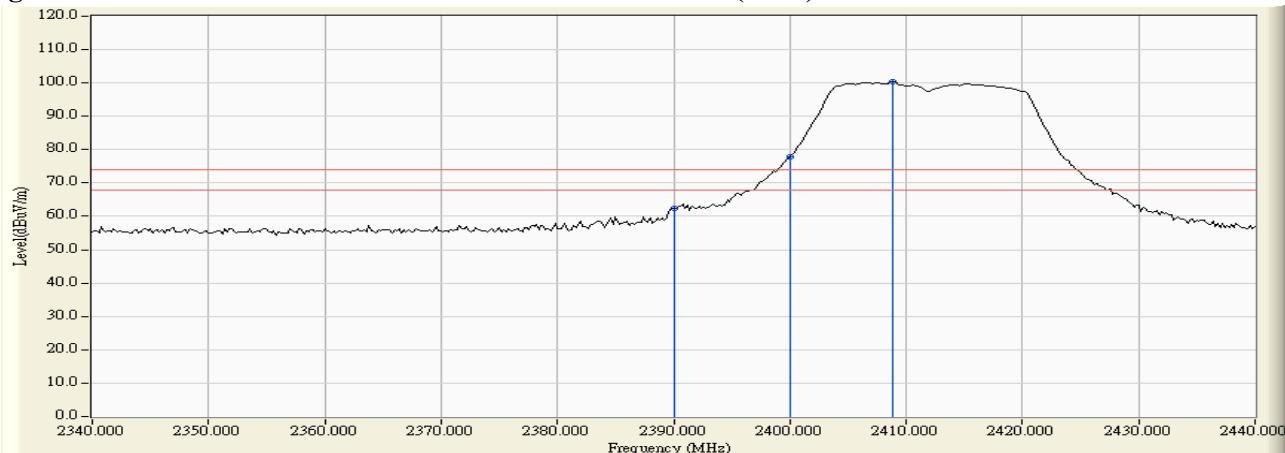


Figure Channel 01:

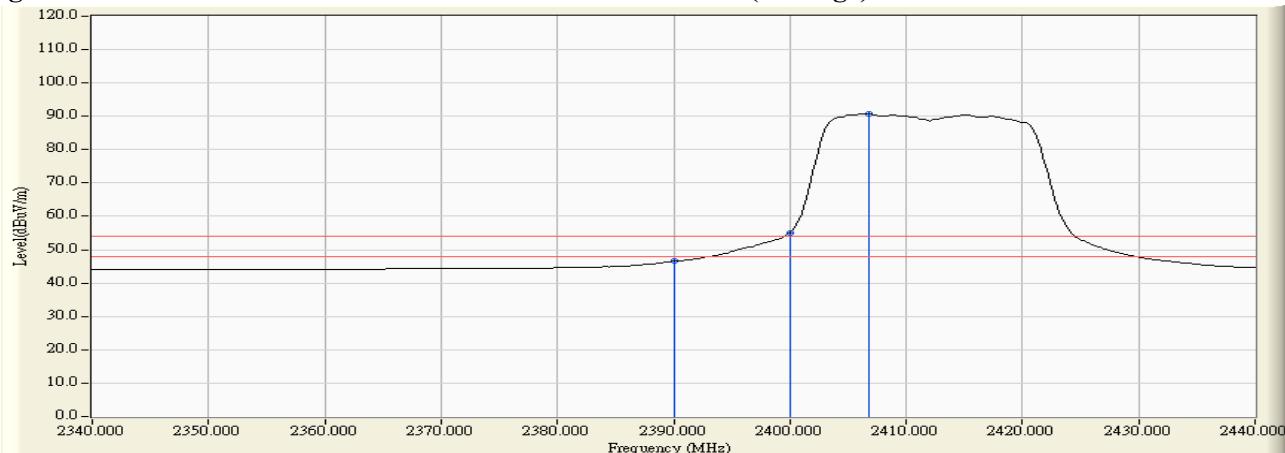Horizontal (Average)



Note:1. All readings above 1GHz are performed with peak and/or average measurements as necessary.

2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : System Controller
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n MCS0 7.2Mbps 20M-BW)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2390.000	30.915	31.329	62.244	74.00	54.00	Pass
01 (Peak)	2400.000	30.912	46.666	77.578	80.448	70.620	Pass
01 (Peak)	2409.000	30.937	69.511	100.448	--	--	--
01 (Peak)	2390.000	30.915	15.294	46.209	74.00	54.00	Pass
01 (Average)	2400.000	30.912	23.985	54.897	80.448	70.620	Pass
01 (Average)	2406.600	30.930	59.690	90.620	--	--	--

Figure Channel 01:

Vertical (Peak)


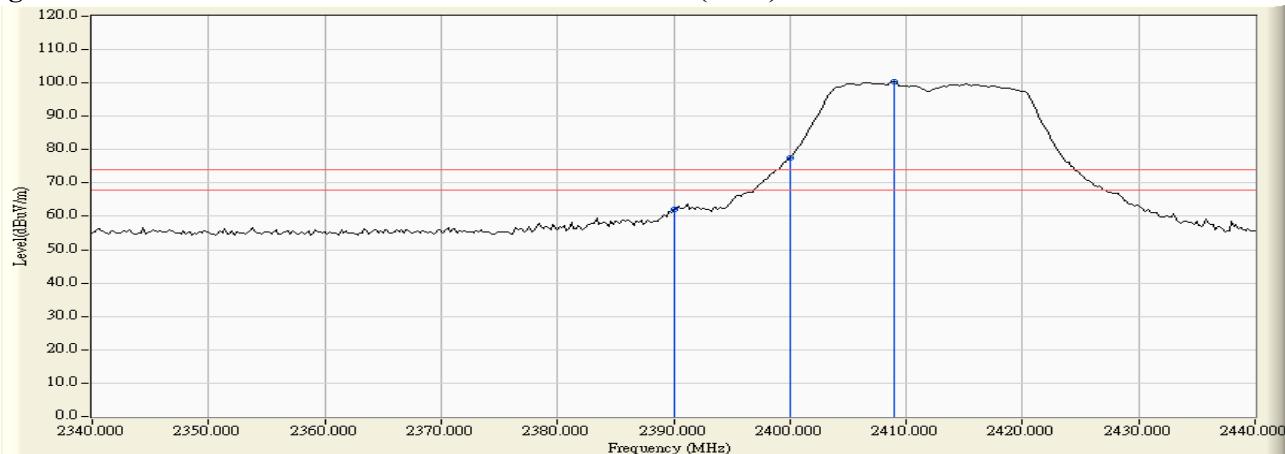


Figure Channel 01:

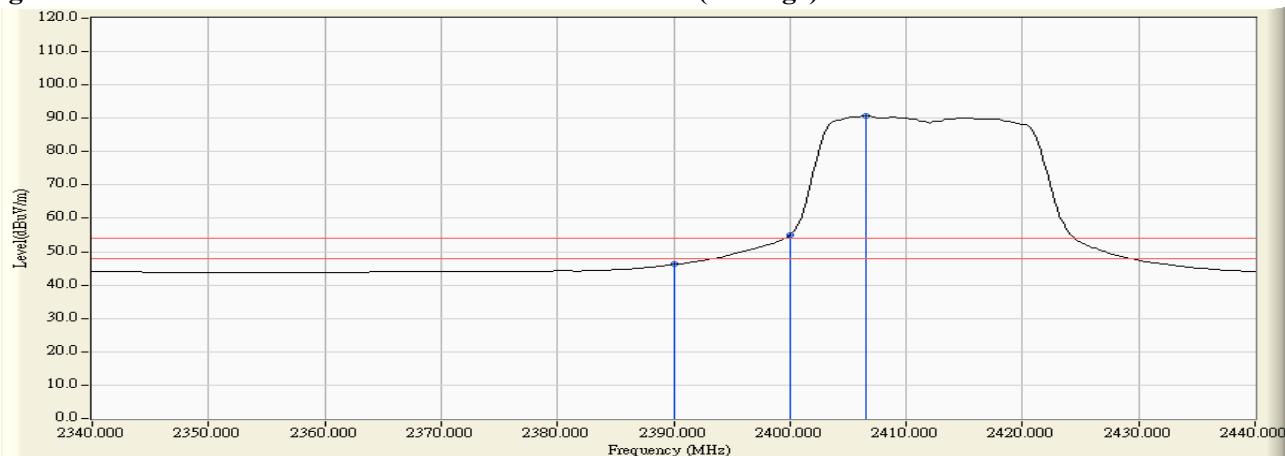Vertical (Average)




Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : System Controller
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n MCS0 7.2Mbps 20M-BW)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2458.900	31.997	66.657	98.653	--	--	--
11 (Peak)	2483.500	32.182	26.029	58.211	74.00	54.00	Pass
11 (Average)	2467.300	32.059	56.420	88.479	--	--	--
11 (Average)	2483.500	32.182	13.915	46.097	74.00	54.00	Pass

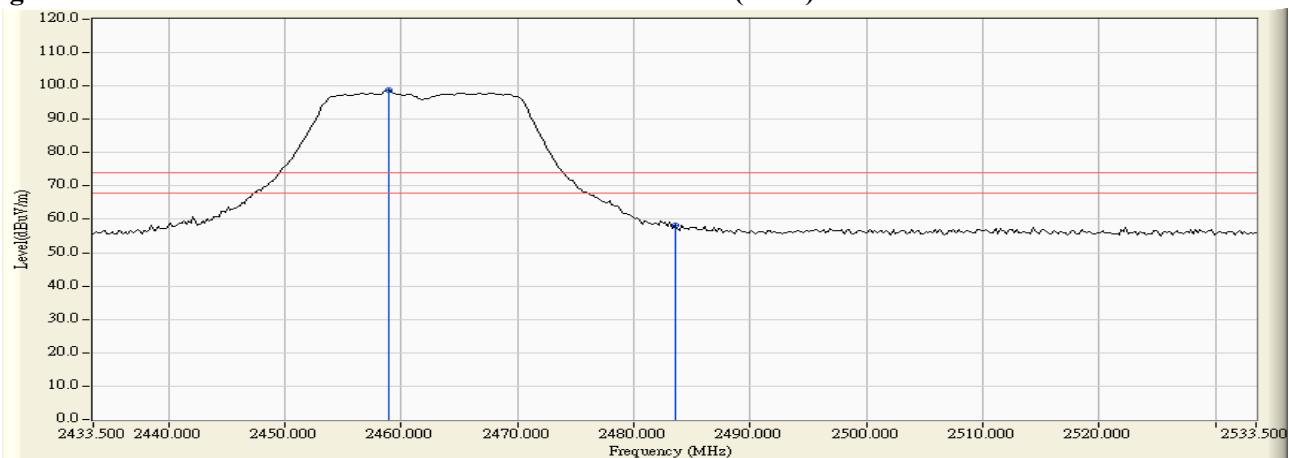Figure Channel 11:
Horizontal (Peak)

Figure Channel 11:
Horizontal (Average)


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : System Controller
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n MCS0 7.2Mbps 20M-BW)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2458.900	31.270	67.020	98.289	--	--	--
11 (Peak)	2483.500	31.435	26.050	57.485	74.00	54.00	Pass
11 (Average)	2458.700	31.268	56.729	87.997	--	--	--
11 (Average)	2483.500	31.435	13.729	45.164	74.00	54.00	Pass

Figure Channel 11:

Vertical (Peak)


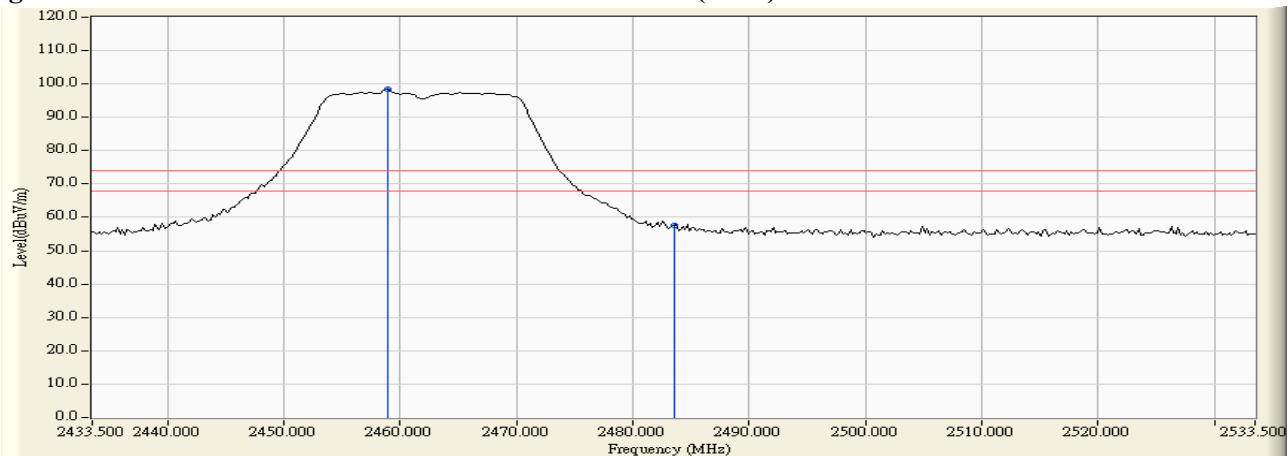


Figure Channel 11:

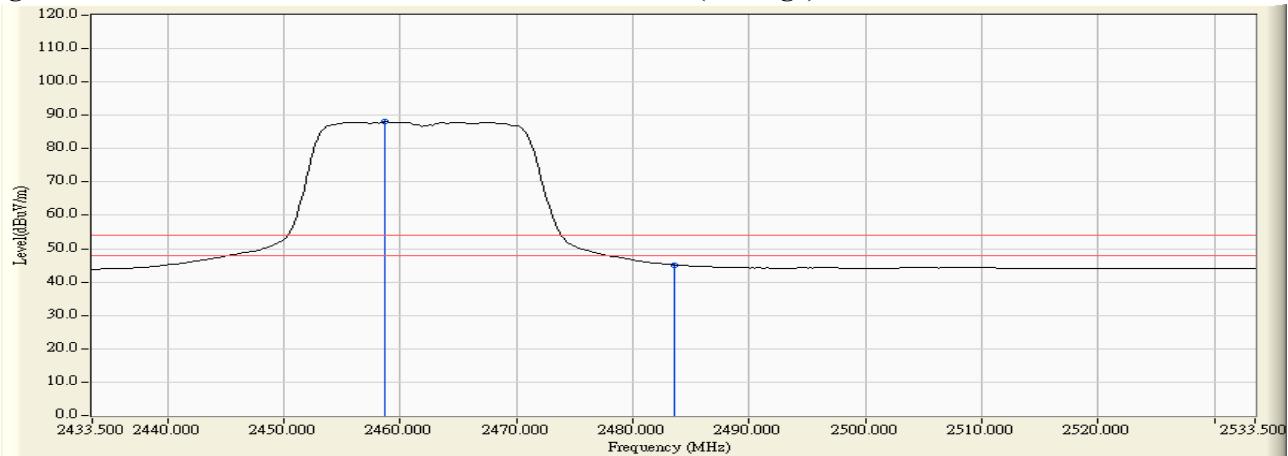Vertical (Average)



Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : System Controller
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit (802.11n MCS0 15Mbps 40M-BW)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
03 (Peak)	2387.000	31.497	31.864	63.361	74.00	54.00	Pass
03 (Peak)	2390.000	31.509	31.274	62.783	74.00	54.00	Pass
03 (Peak)	2400.000	31.561	36.052	67.613	76.820	67.383	Pass
03 (Peak)	2412.400	31.641	65.179	96.820	--	--	--
03 (Average)	2390.000	31.509	17.875	49.384	74.00	54.00	Pass
03 (Average)	2400.000	31.561	24.005	55.566	76.820	67.383	Pass
03 (Average)	2406.400	31.602	55.782	87.383	--	--	--

Figure Channel 03:

Horizontal (Peak)


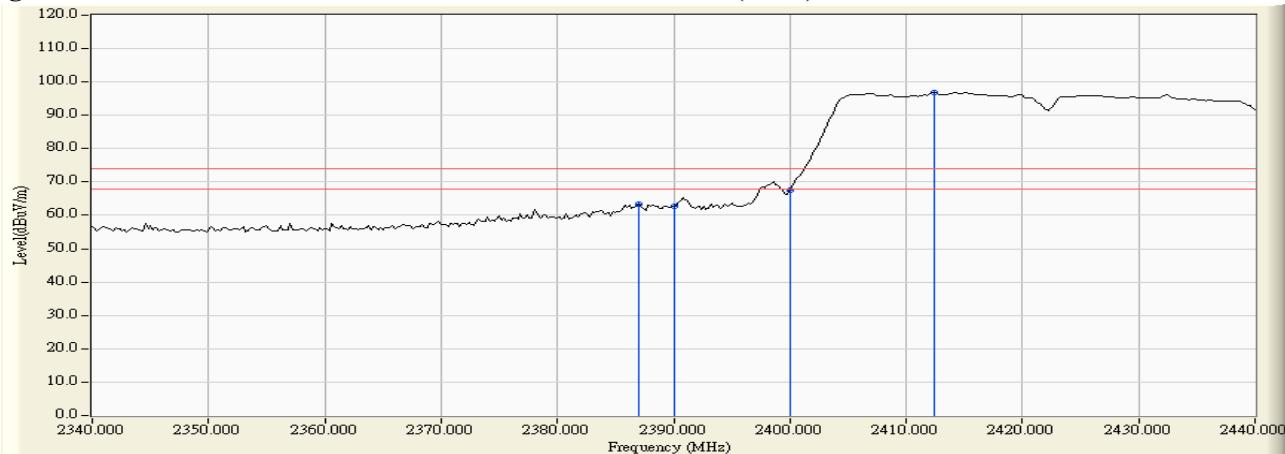


Figure Channel 01:

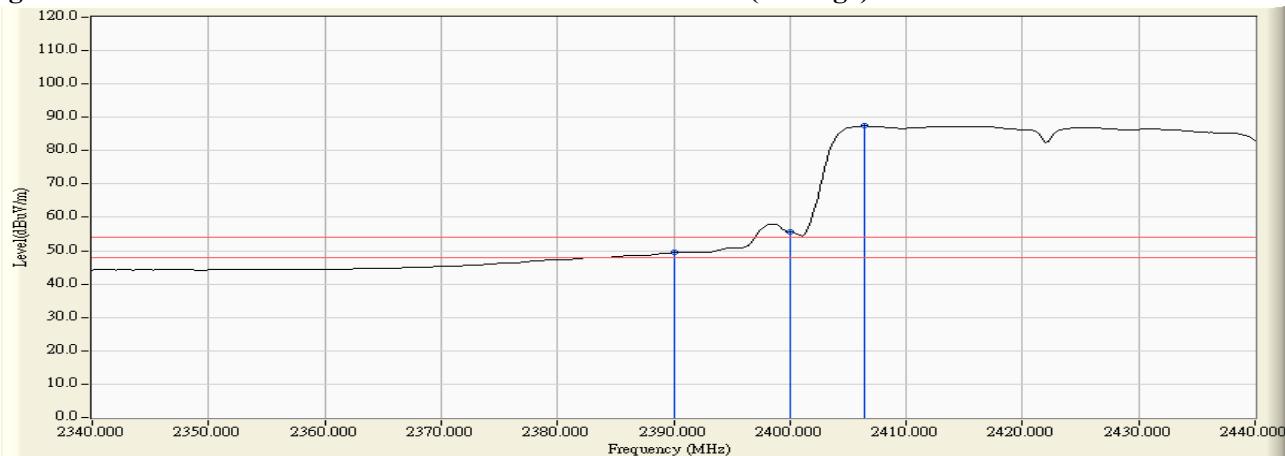Horizontal (Average)



Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : System Controller
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit (802.11n MCS0 15Mbps 40M-BW)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
03 (Peak)	2386.200	30.933	31.889	62.822	74.00	54.00	Pass
03 (Peak)	2390.000	30.915	30.599	61.514	74.00	54.00	Pass
03 (Peak)	2400.000	30.912	36.355	67.267	76.589	67.221	Pass
03 (Peak)	2412.400	30.952	65.637	96.589	--	--	--
03 (Average)	2390.000	30.915	18.304	49.219	74.00	54.00	Pass
03 (Average)	2400.000	30.912	24.448	55.360	76.589	67.221	Pass
03 (Average)	2406.400	30.930	56.291	87.221	--	--	--

Figure Channel 01:

Vertical (Peak)


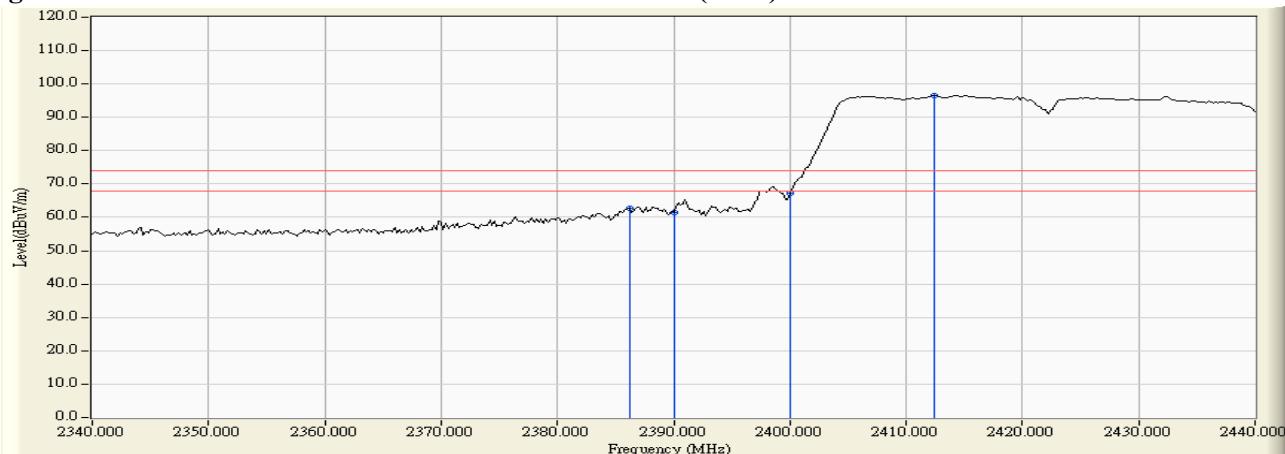


Figure Channel 01:

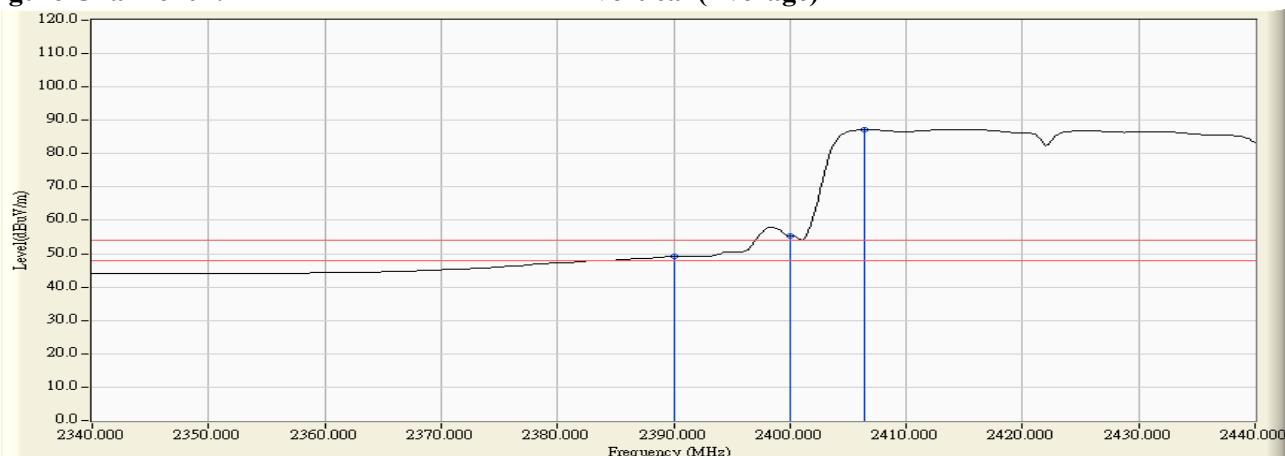Vertical (Average)



Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : System Controller
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit (802.11n MCS0 15Mbps 40M-BW)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
09 (Peak)	2462.300	32.022	62.198	94.220	--	--	--
09 (Peak)	2483.500	32.182	26.294	58.476	74.00	54.00	Pass
09 (Average)	2442.700	31.873	52.712	84.585	--	--	--
09 (Average)	2483.500	32.182	14.546	46.728	74.00	54.00	Pass

Figure Channel 09:

Horizontal (Peak)

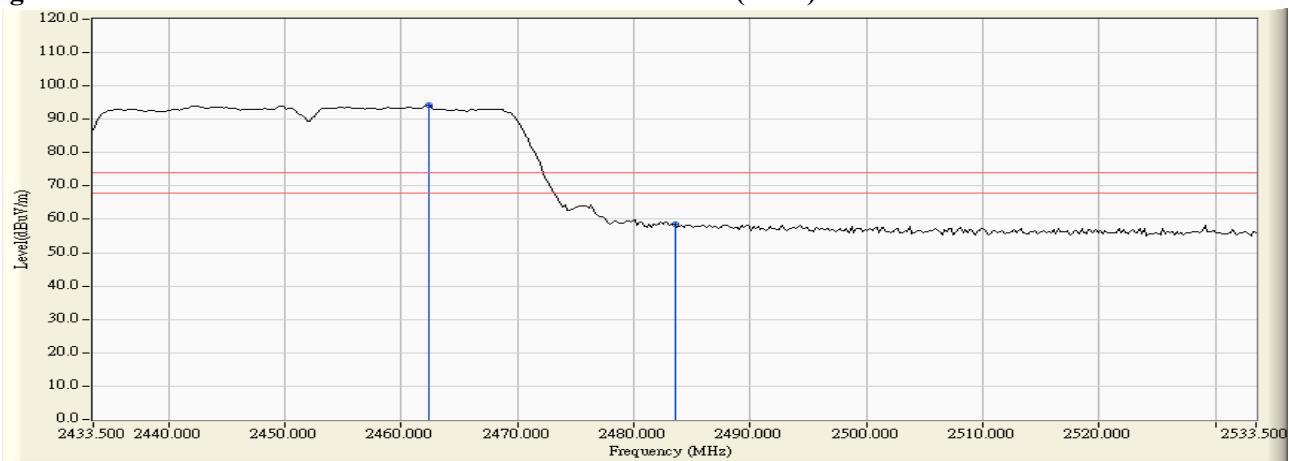


Figure Channel 09:

Horizontal (Average)



Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : System Controller
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit (802.11n MCS0 15Mbps 40M-BW)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
09 (Peak)	2442.300	31.156	62.042	93.197	--	--	--
09 (Peak)	2483.500	31.435	26.204	57.639	74.00	54.00	Pass
09 (Peak)	2484.700	31.444	26.873	58.316	74.00	54.00	Pass
09 (Average)	2442.700	31.158	52.463	83.621	--	--	--
09 (Average)	2483.500	31.435	14.125	45.560	74.00	54.00	Pass

Figure Channel 09:

Vertical (Peak)


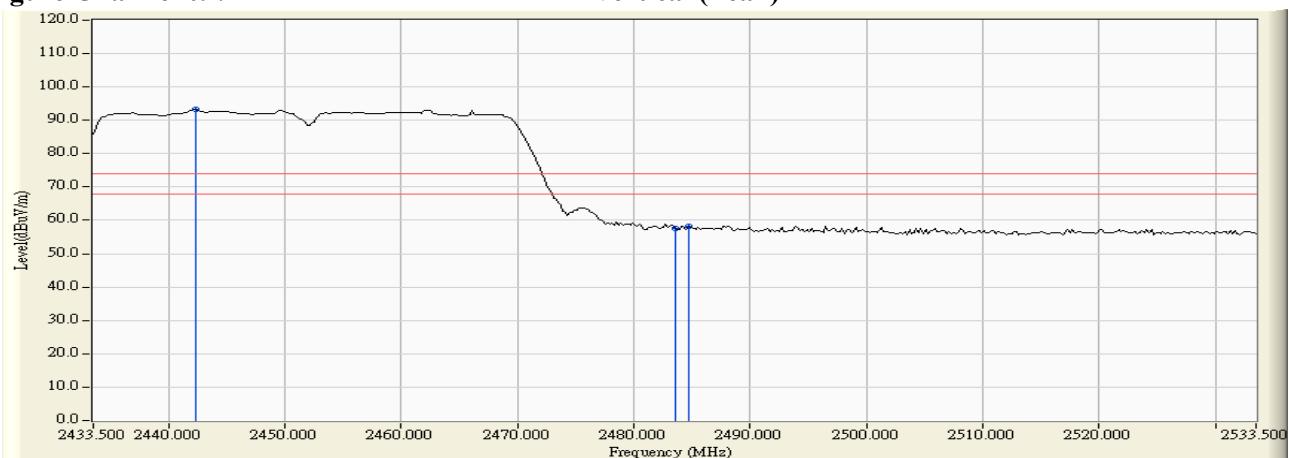


Figure Channel 09:

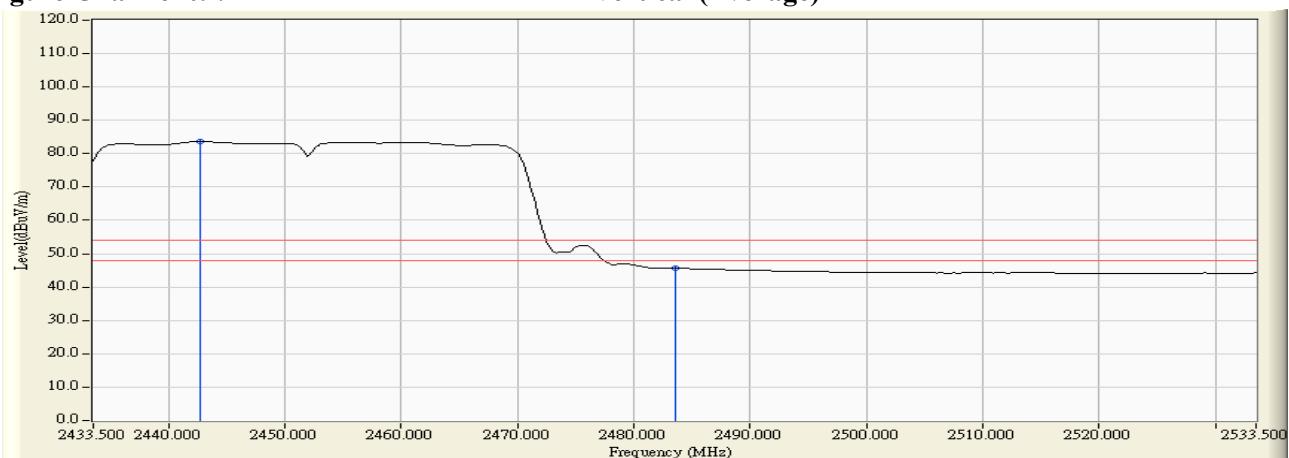Vertical (Average)



Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

7. Occupied Bandwidth


7.1. Test Equipment

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2013
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2013
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2013

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

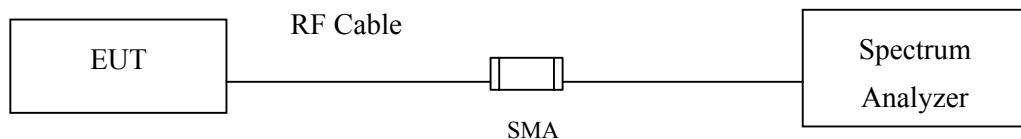7.2. Test Setup



7.3. Limits

The minimum bandwidth shall be at least 500 kHz.

7.4. Test Procedure

The EUT was setup according to ANSI C63.10: 2009; tested according to DTS test procedure of Jan KDB558074 for compliance to FCC 47CFR 15.247 requirements.

7.5. Uncertainty


± 150Hz

7.6. Test Result of Occupied Bandwidth

Product : System Controller
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2412MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412	8750	>500	Pass

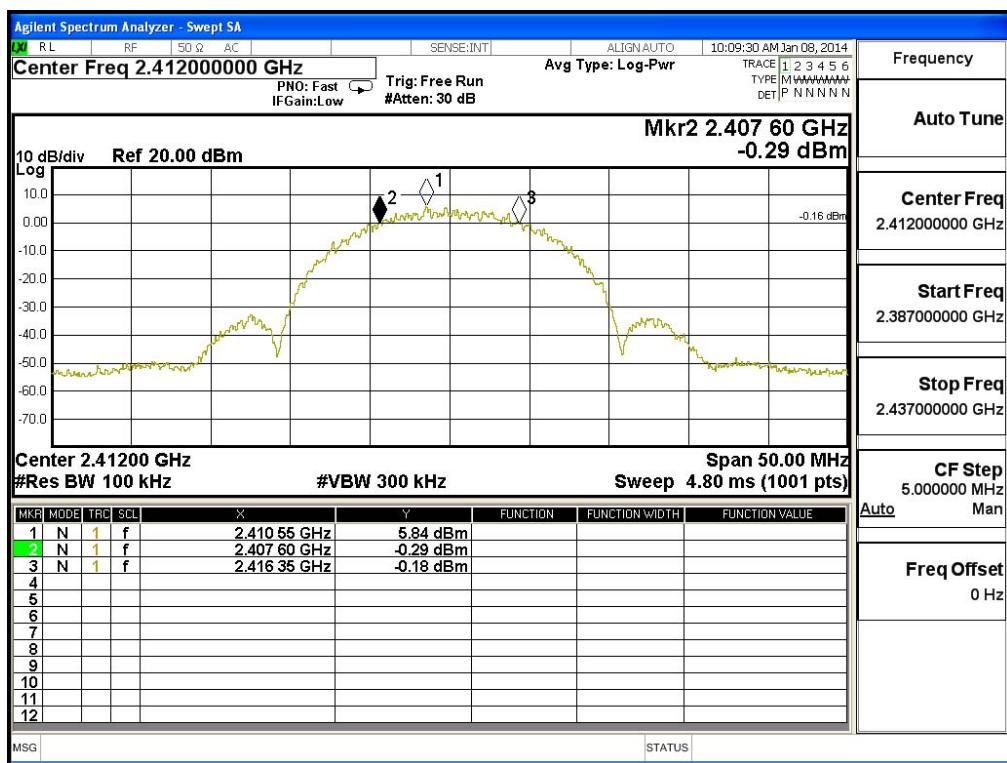
Figure Channel 1:



Product : System Controller
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437	8750	>500	Pass

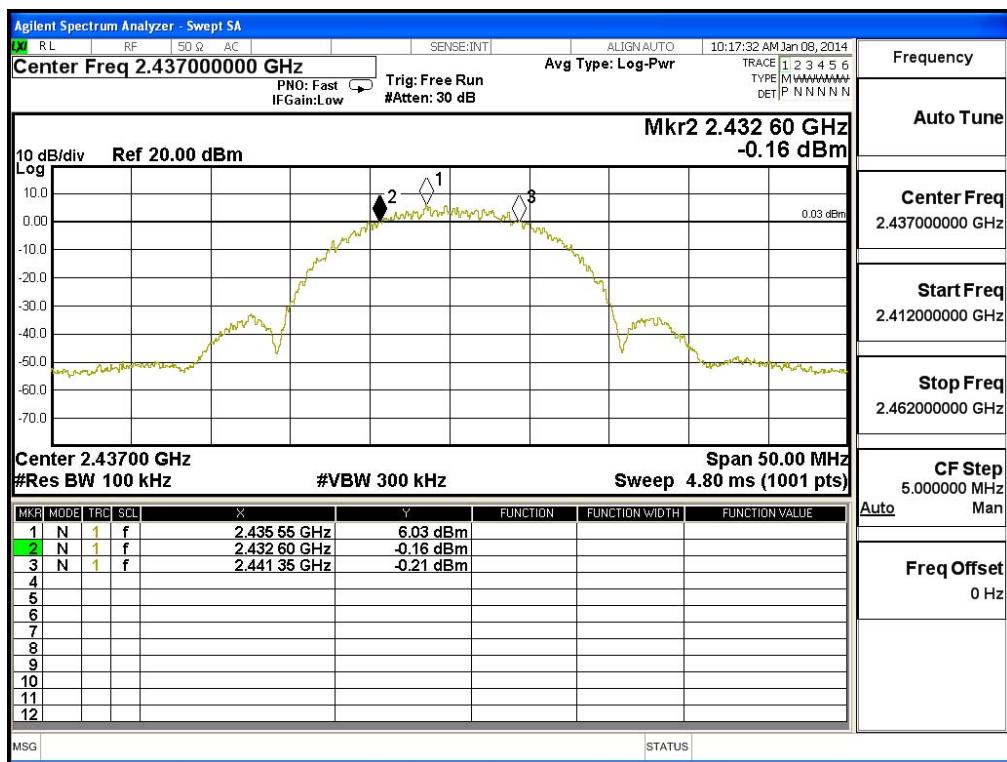
Figure Channel 6:



Product : System Controller
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11	2462	8750	>500	Pass

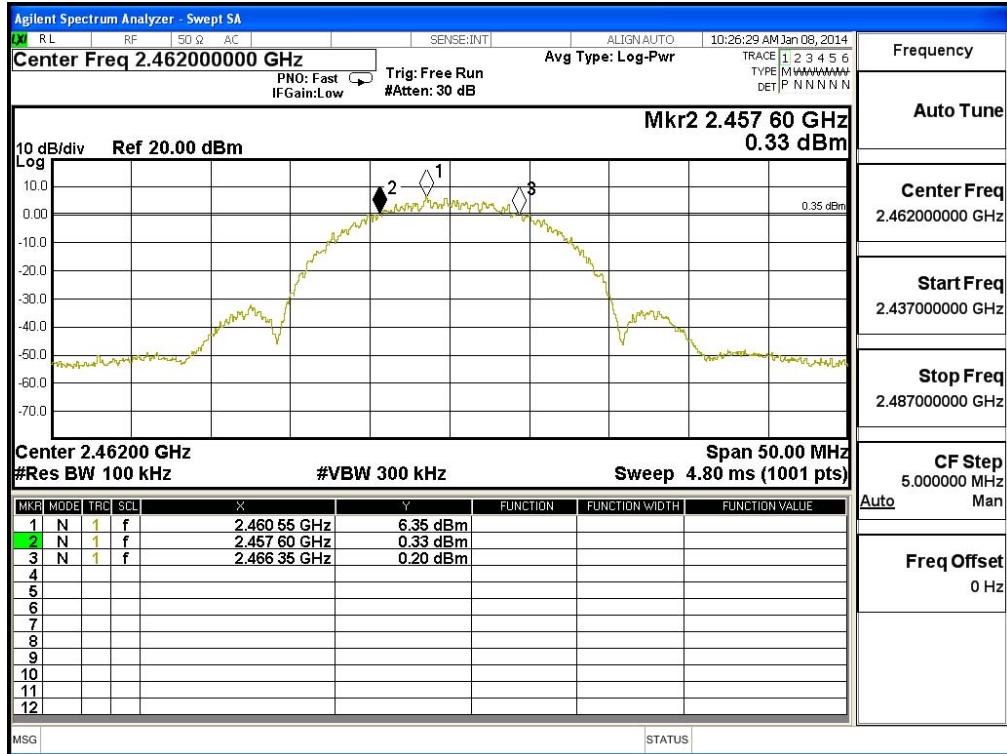
Figure Channel 11:



Product : System Controller
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412	16600	>500	Pass

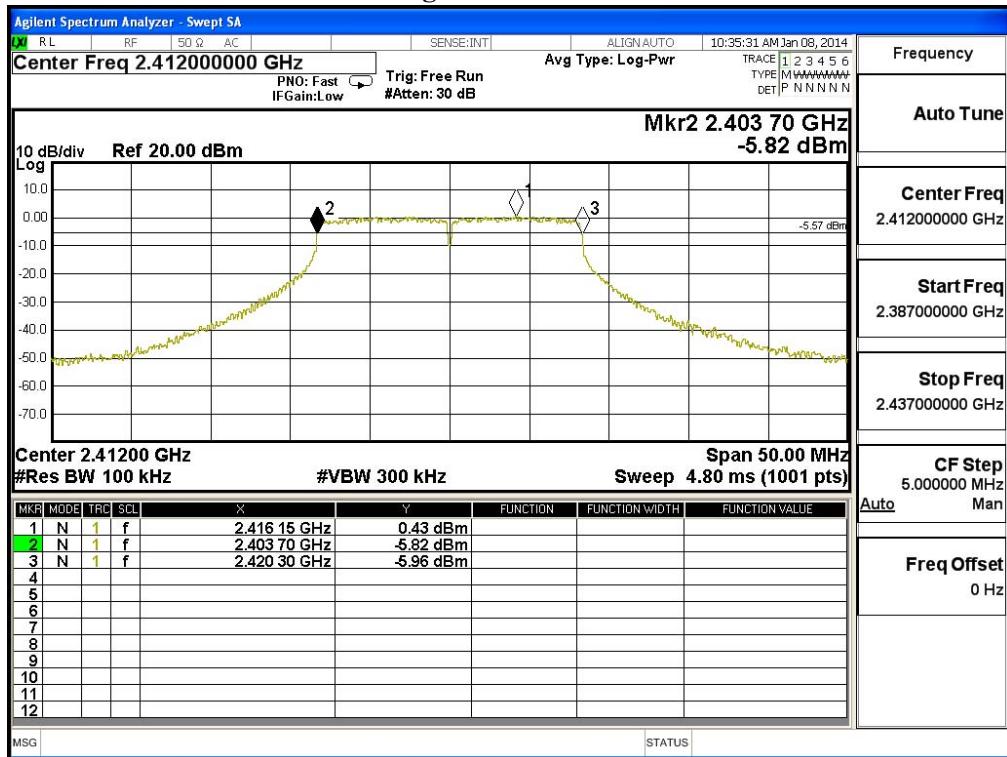
Figure Channel 1:



Product : System Controller
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437	16600	>500	Pass

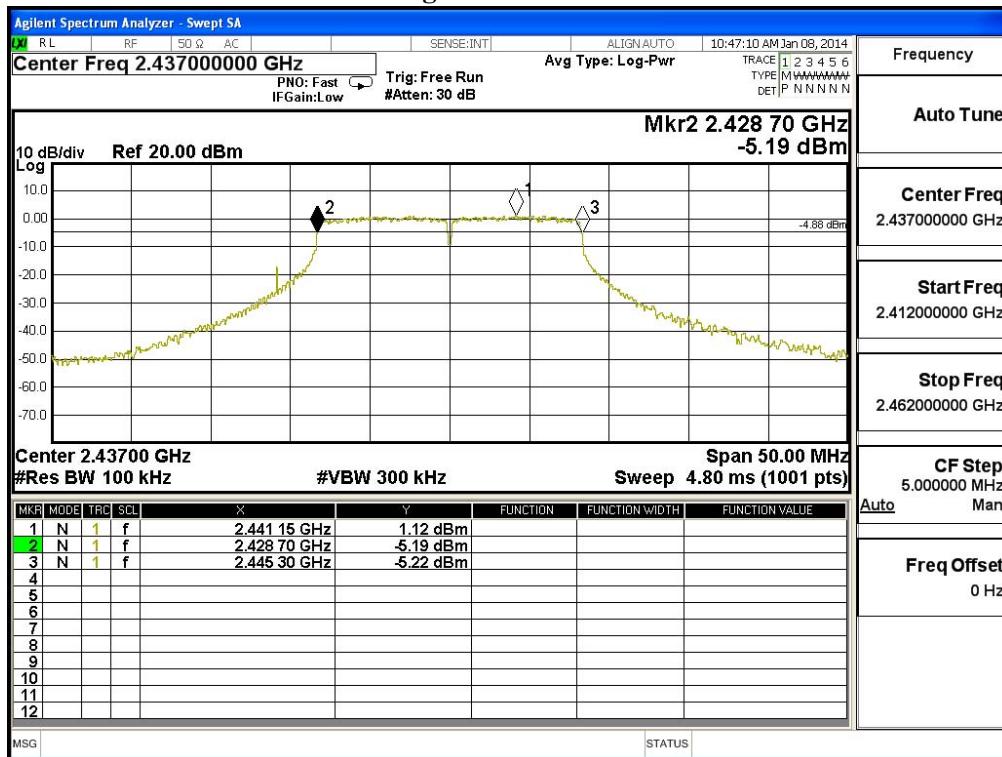
Figure Channel 6:



Product : System Controller
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11	2462	16600	>500	Pass

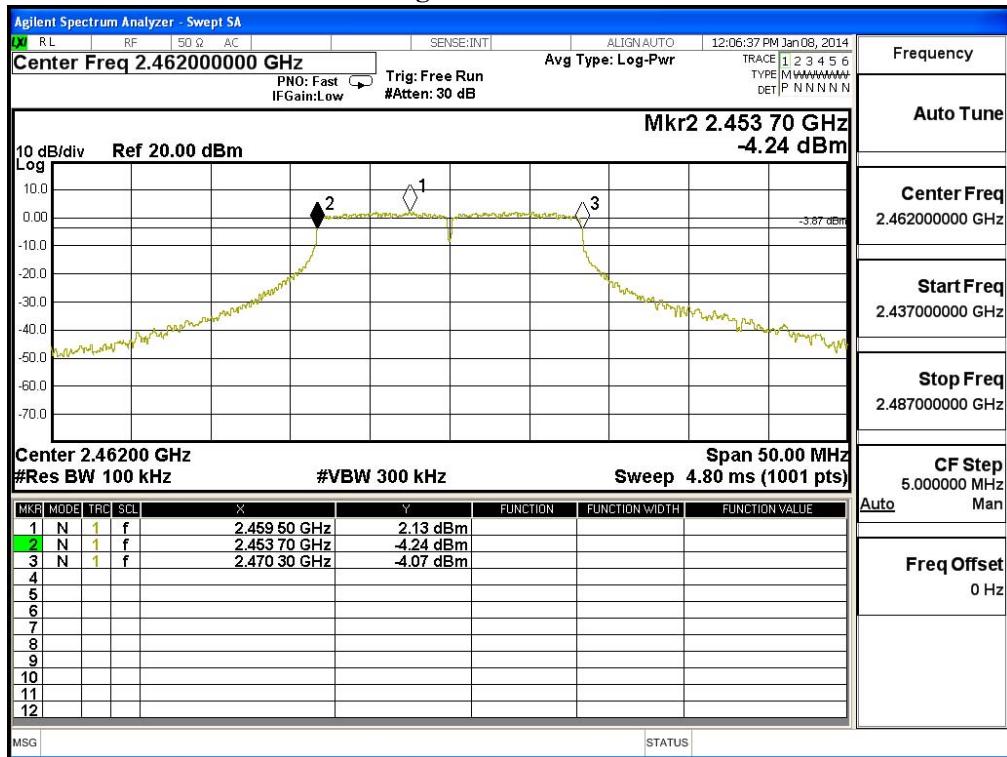
Figure Channel 11:



Product : System Controller
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n MCS0 7.2Mbps 20M-BW) (2412MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412	17800	>500	Pass

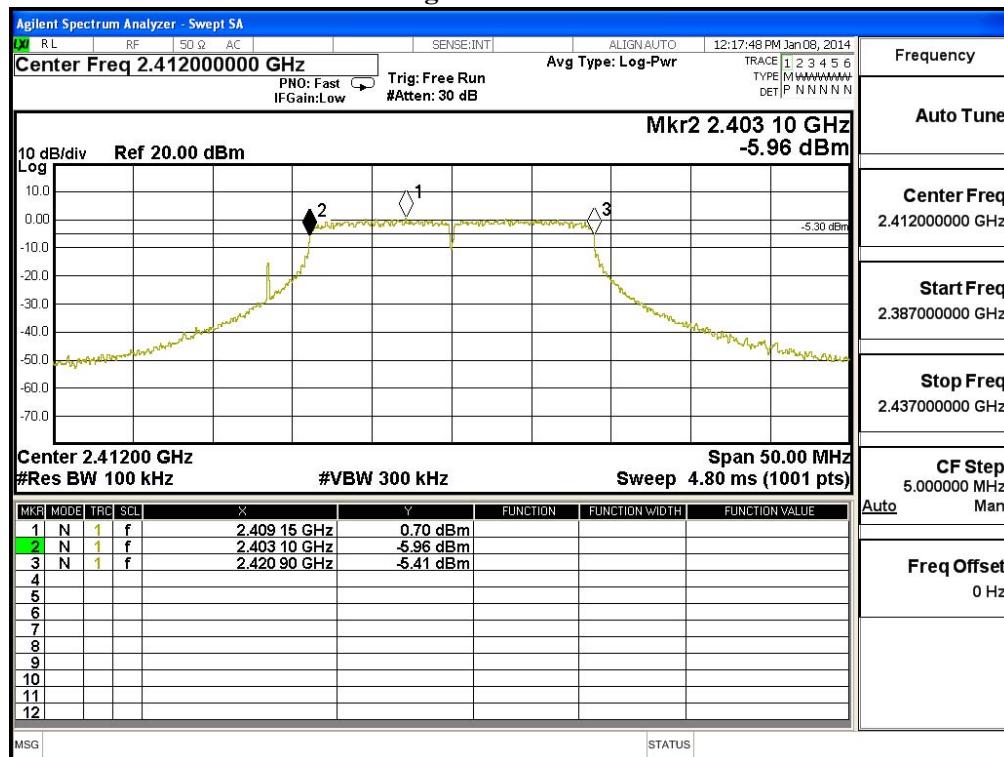
Figure Channel 1:



Product : System Controller
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n MCS0 7.2Mbps 20M-BW) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437	17800	>500	Pass

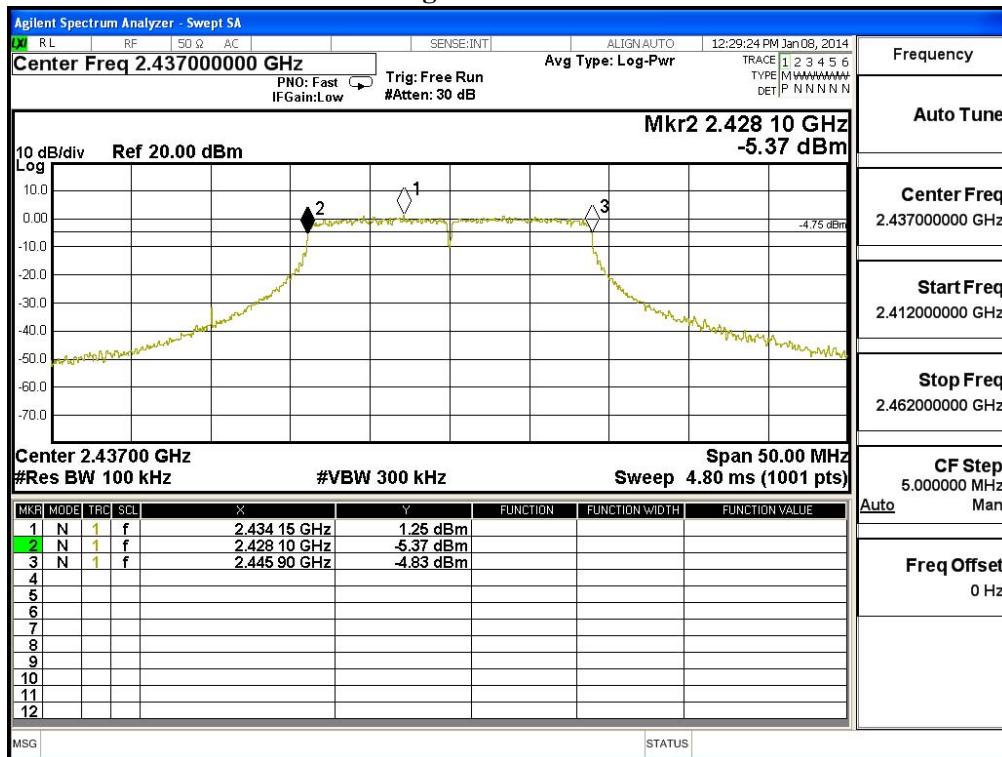
Figure Channel 6:



Product : System Controller
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n MCS0 7.2Mbps 20M-BW) (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11	2462	17800	>500	Pass

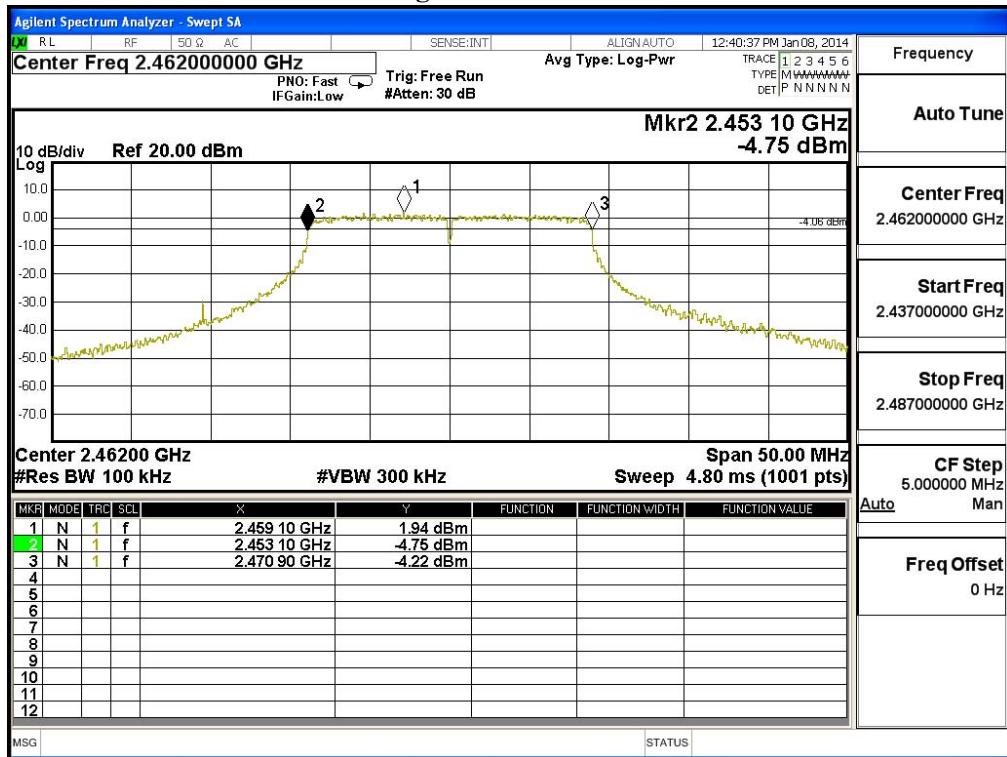
Figure Channel 11:



Product : System Controller
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit (802.11n MCS0 15Mbps 40M-BW) (2422MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
3	2422	36600	>500	Pass

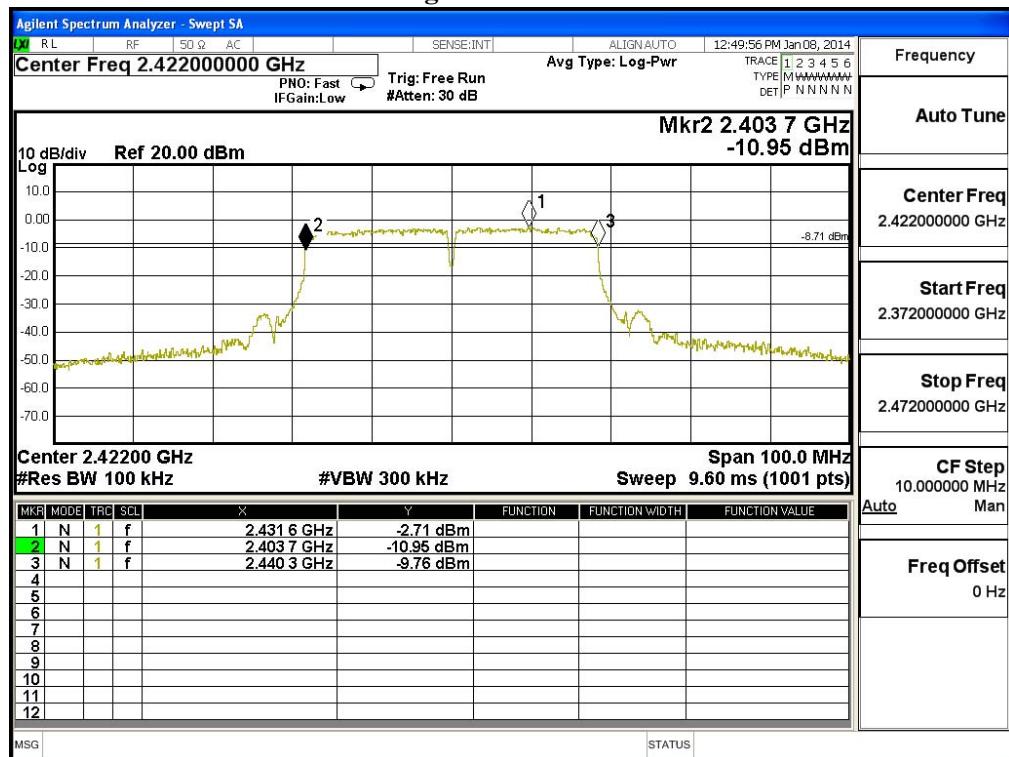
Figure Channel 1:



Product : System Controller
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit (802.11n MCS0 15Mbps 40M-BW) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437	36600	>500	Pass

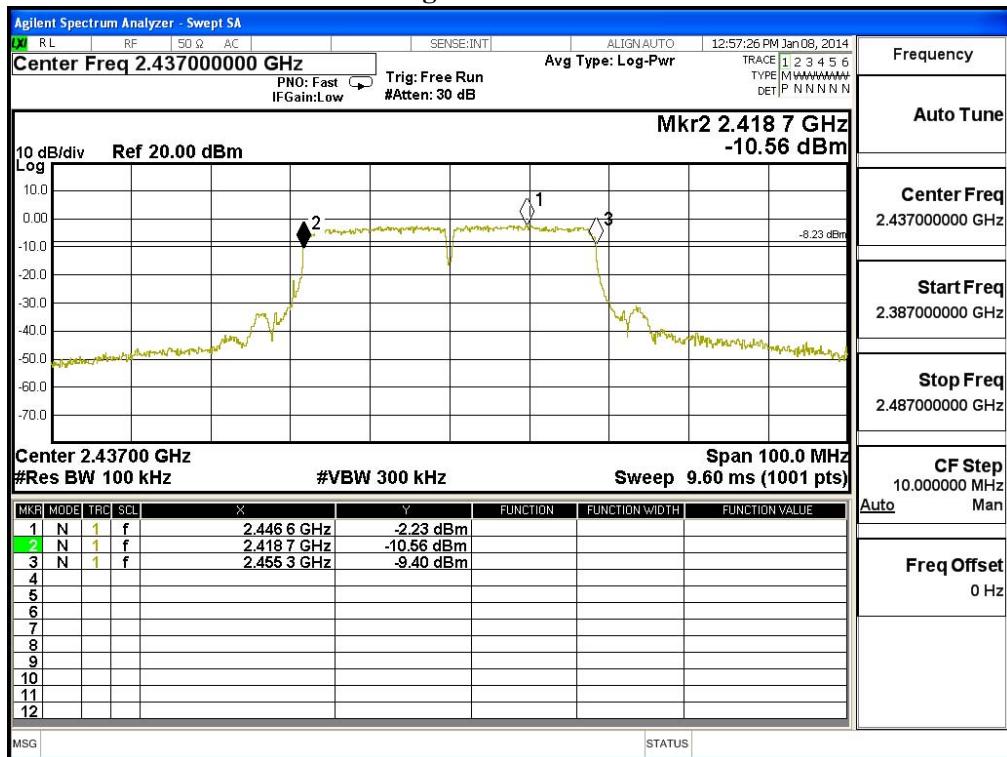
Figure Channel 4:



Product : System Controller
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit (802.11n MCS0 15Mbps 40M-BW) (2452MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
9	2452	36600	>500	Pass

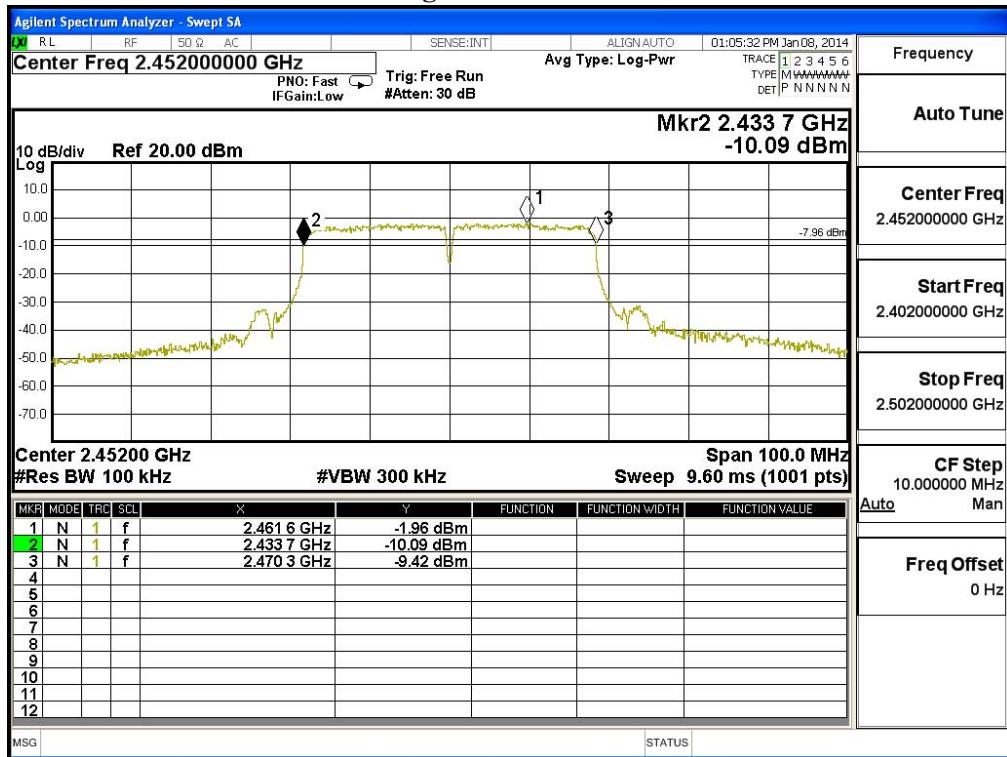Figure Channel 7:



8. Power Density


8.1. Test Equipment

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2013
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2013
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2013

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

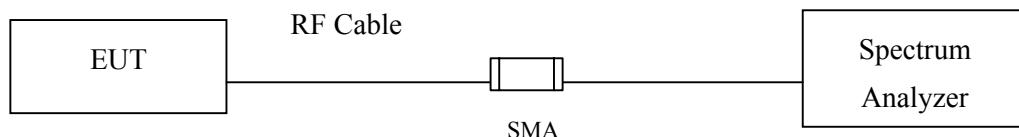8.2. Test Setup



8.3. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

8.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2009; tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

The maximum power spectral density using KDB 558074 section 10.2 PKPSD (peak PSD) method.

8.5. Uncertainty


± 1.27 dB

8.6. Test Result of Power Density

Product : System Controller
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2412MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
1	2412	5.460	< 8dBm	Pass

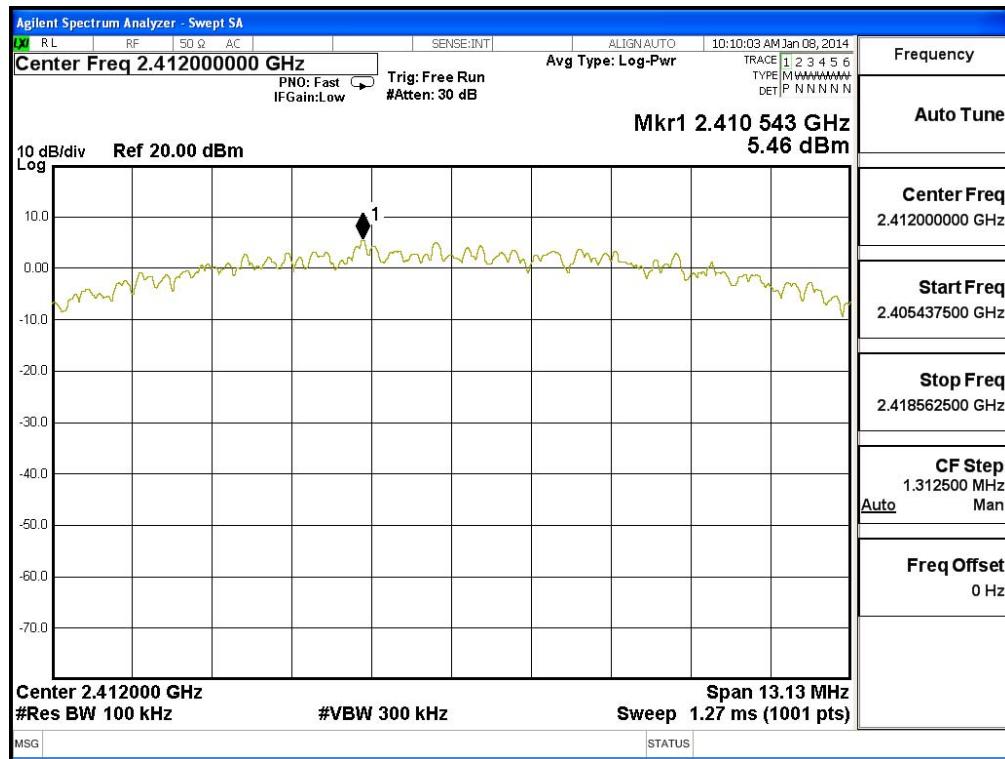
Figure Channel 1:



Product : System Controller
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
6	2437	5.760	< 8dBm	Pass

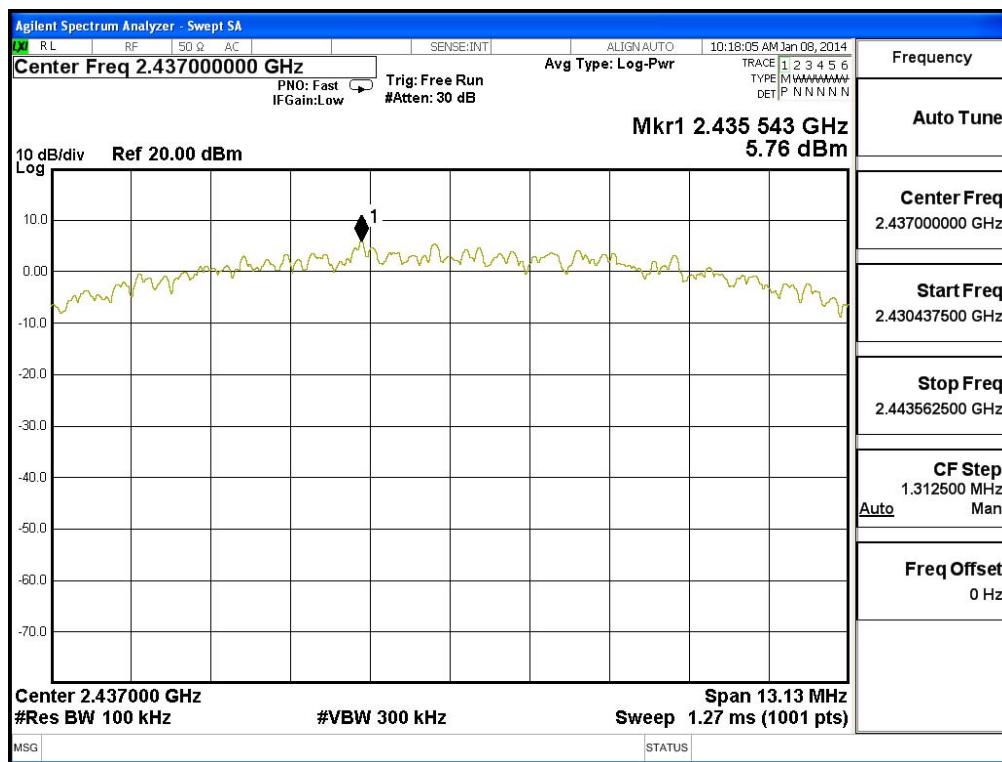
Figure Channel 6:



Product : System Controller
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
11	2462	6.060	< 8dBm	Pass

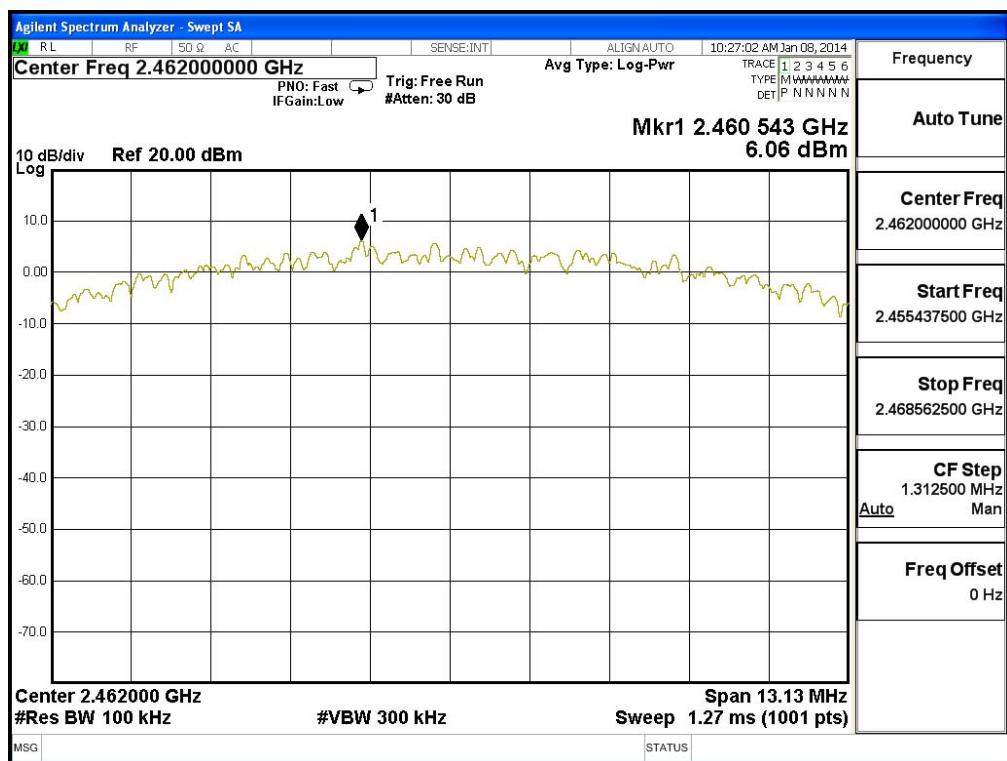
Figure Channel 11:



Product : System Controller
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
1	2412	0.160	< 8dBm	Pass

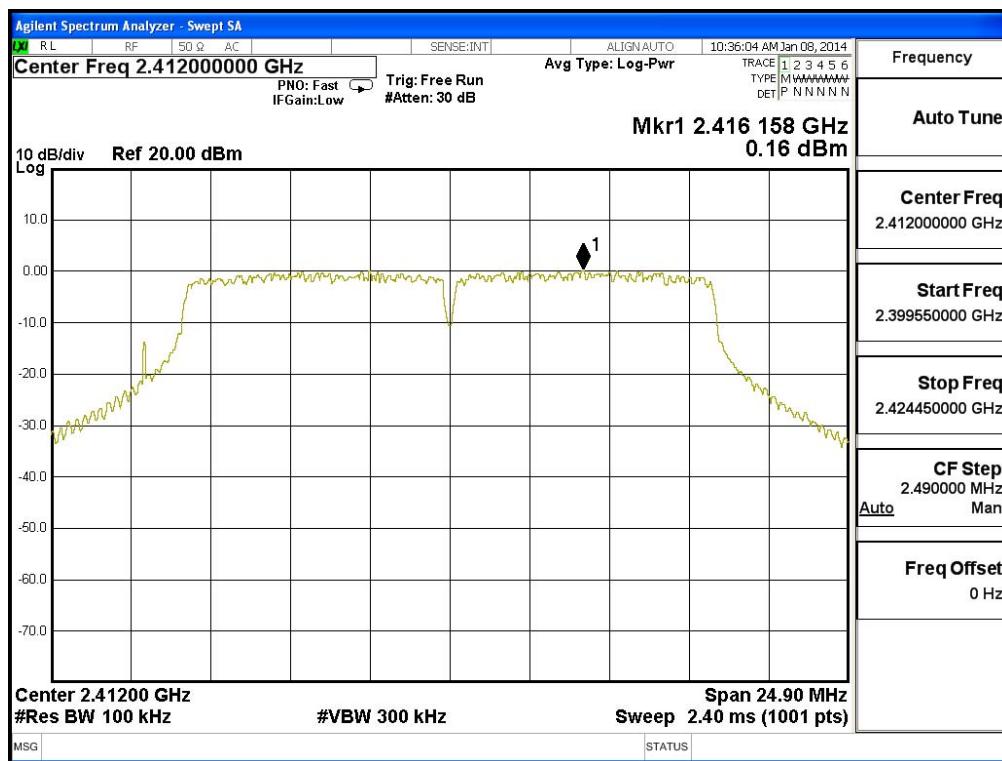
Figure Channel 1:



Product : System Controller
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
6	2437	0.860	< 8dBm	Pass

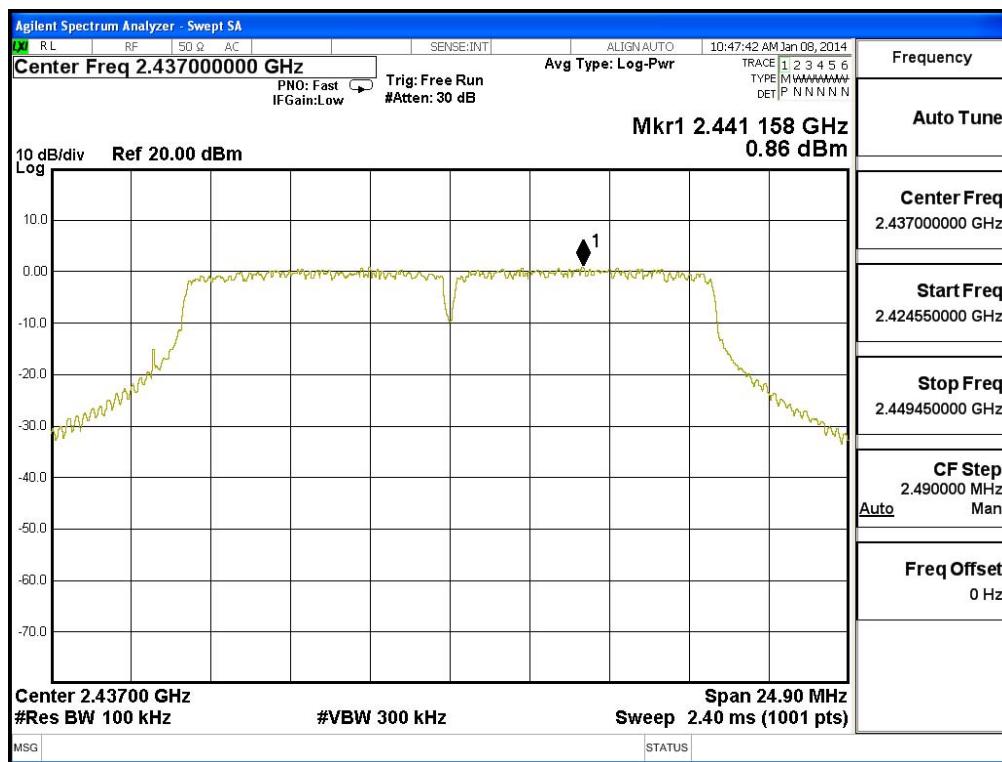
Figure Channel 6:



Product : System Controller
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
11	2462	1.710	< 8dBm	Pass

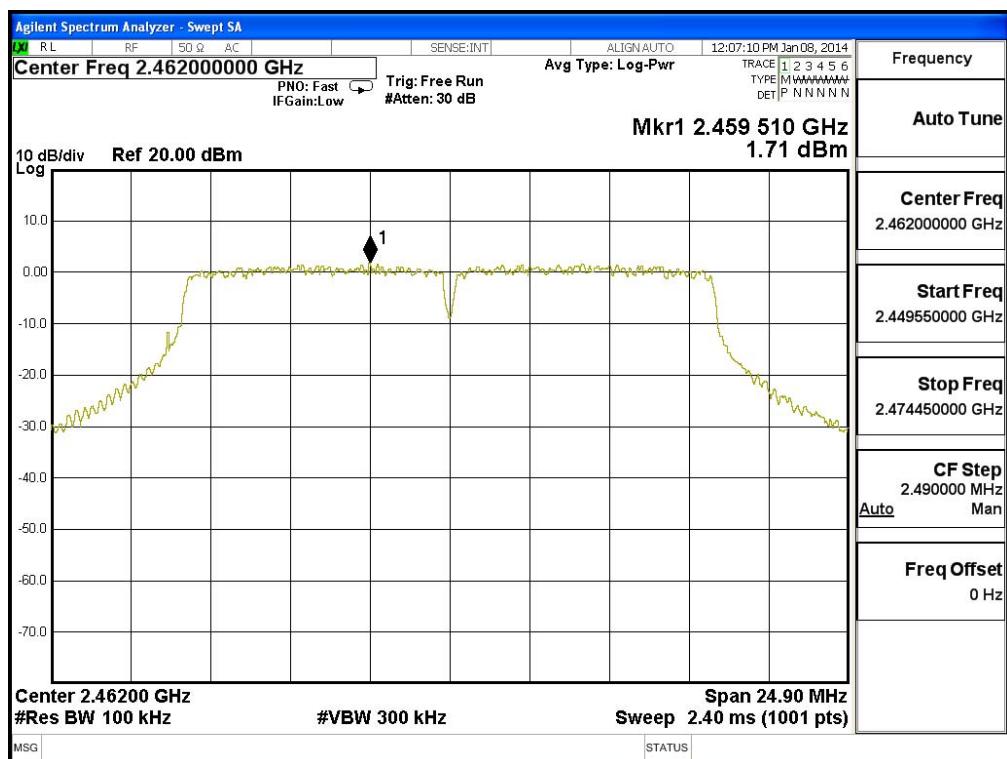
Figure Channel 11:



Product : System Controller
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n MCS0 7.2Mbps 20M-BW) (2412MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
1	2412	0.430	< 8dBm	Pass

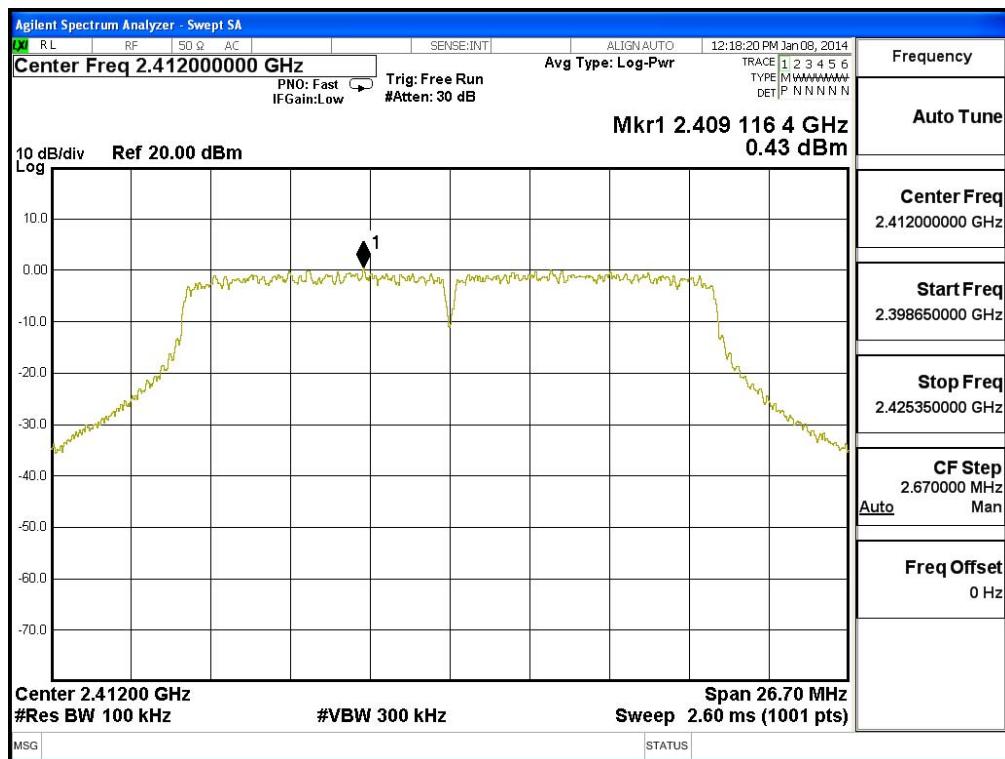
Figure Channel 1:



Product : System Controller
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Mode 3: Transmit (802.11n MCS0 7.2Mbps 20M-BW) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
6	2437	0.930	< 8dBm	Pass

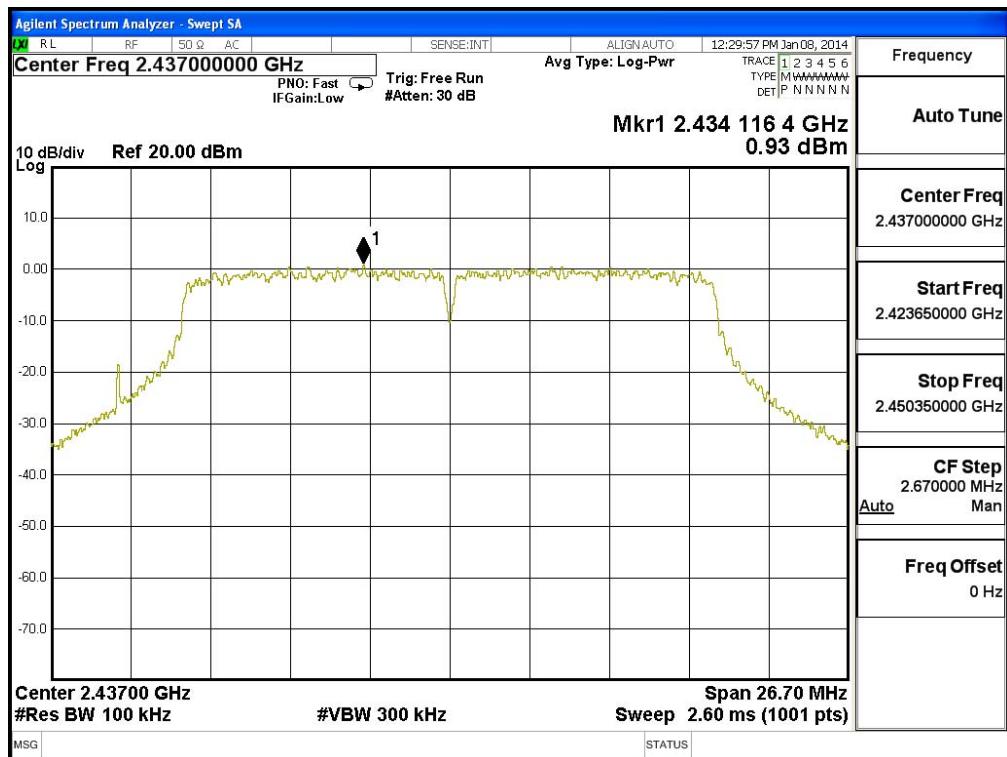
Figure Channel 6:



Product : System Controller
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n MCS0 7.2Mbps 20M-BW) (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
11	2462	1.470	< 8dBm	Pass

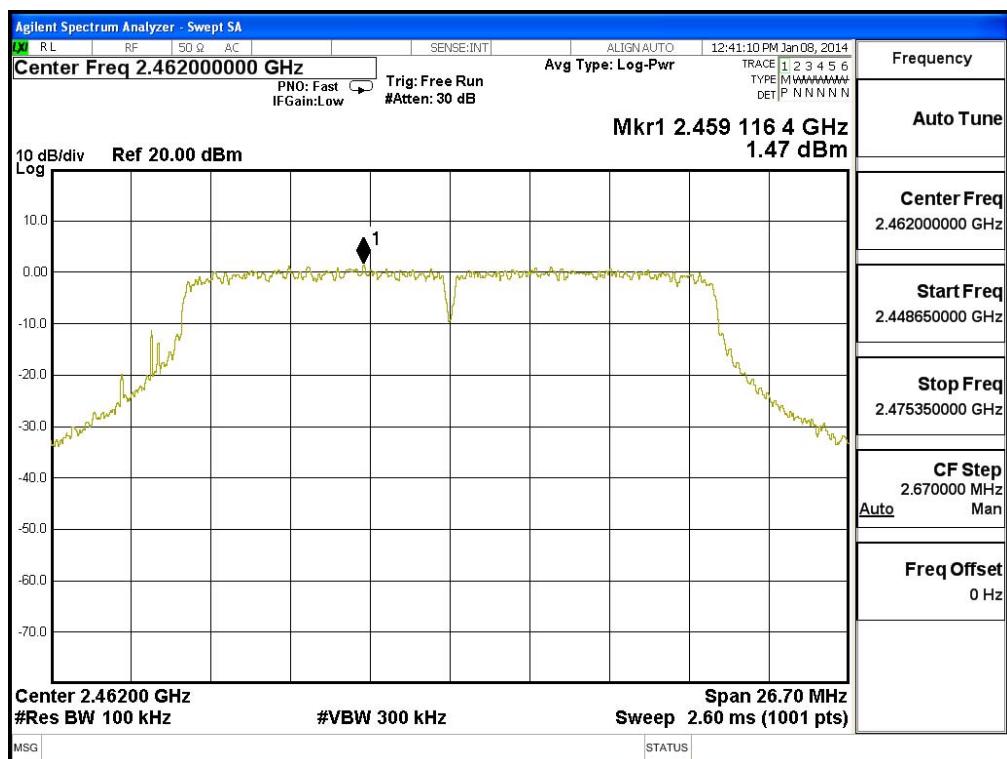
Figure Channel 11:



Product : System Controller
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit (802.11n MCS0 15Mbps 40M-BW) (2422MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
3	2422	-2.910	< 8dBm	Pass

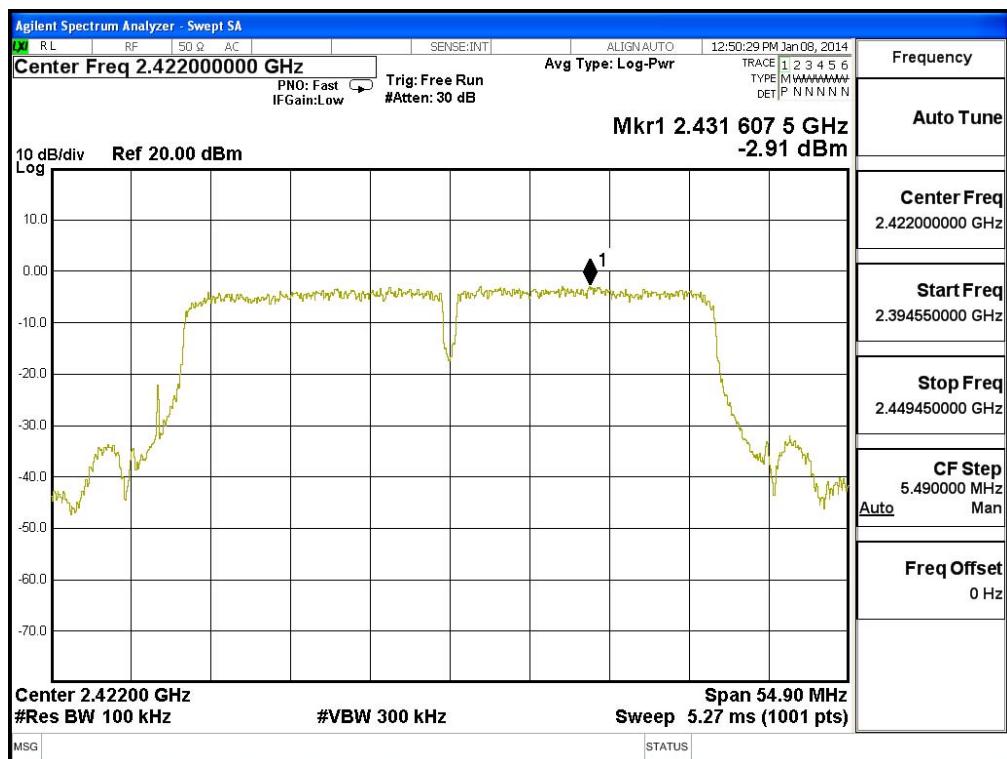
Figure Channel 1:



Product : System Controller
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Mode 4: Transmit (802.11n MCS0 15Mbps 40M-BW) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
6	2437	-2.510	< 8dBm	Pass

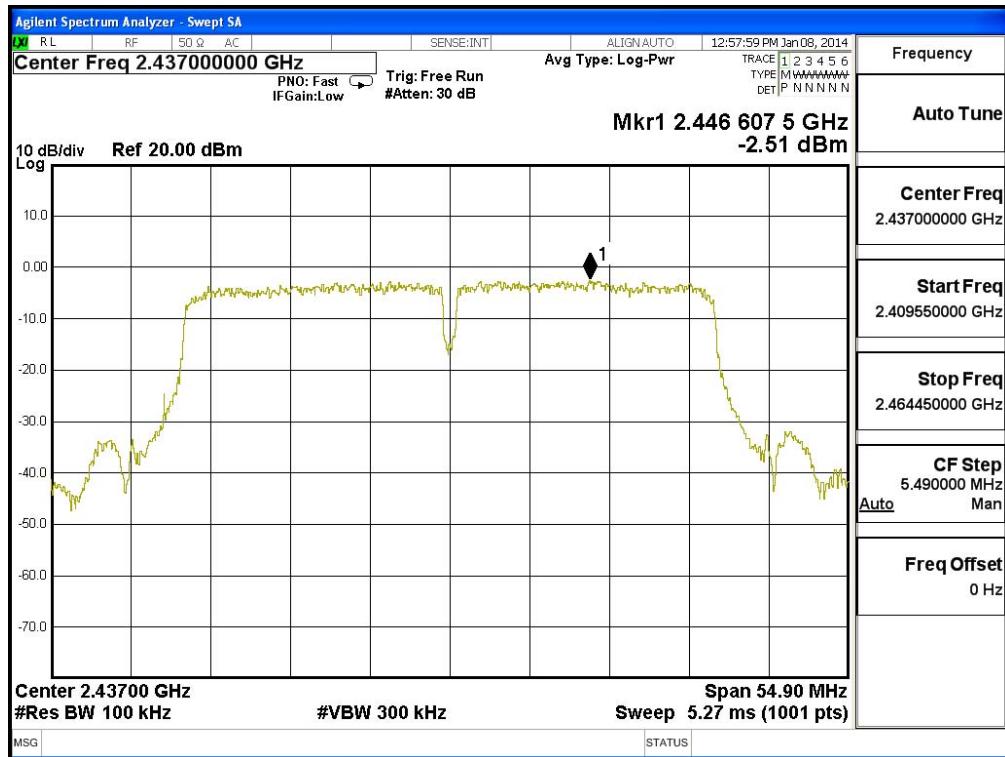
Figure Channel 4:



Product : System Controller
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit (802.11n MCS0 15Mbps 40M-BW) (2452MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
9	2452	-2.280	< 8dBm	Pass

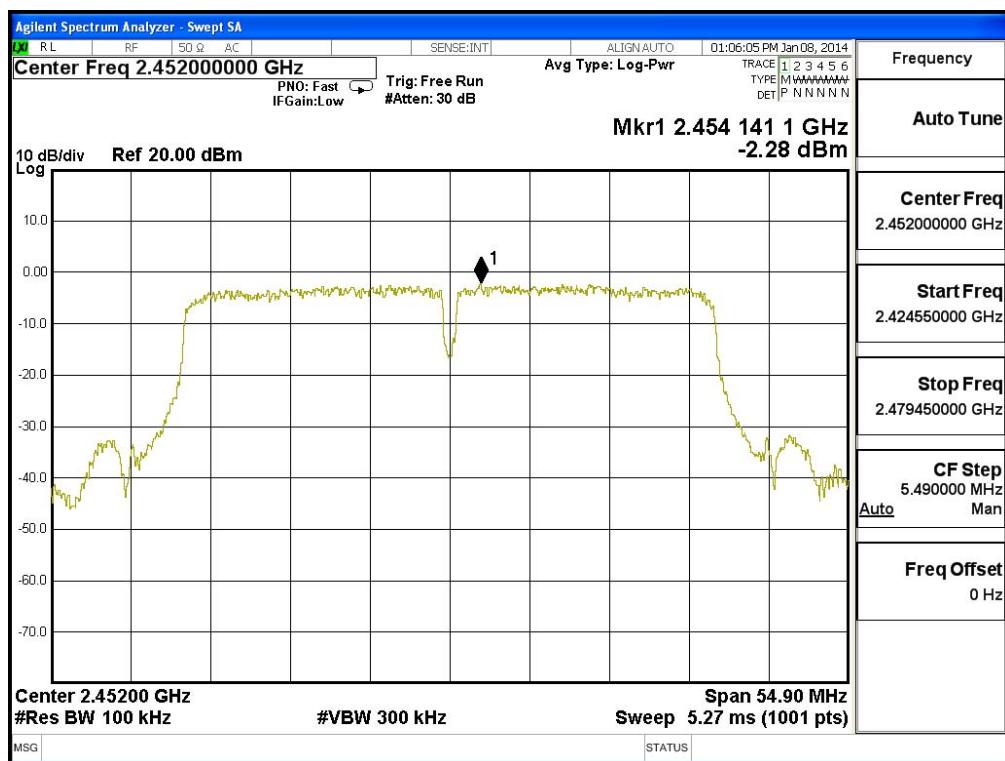Figure Channel 7:



9. EMI Reduction Method During Compliance Testing

No modification was made during testing.