


Prüfbericht - Nr.: Test Report No.	14007588 001	Seite 1 von 14 Page 1 of 14			
Auftraggeber: Applicant	LEM Industries Parc Medicis 650 26 Av, Pepinieres 94832 Fresnes Cedex FRANCE				
Gegenstand der Prüfung: Test item	LEM Evasio Professional Wireless Headset (Base)				
Bezeichnung: Identification	EVA-S-0000	Serien-Nr.: Serial No.	Engineering sample		
Wareneingangs-Nr.: Receipt No.	041028016	Eingangsdatum: Date of receipt	28.10.2004		
Prüfört: Testing location	TÜV Rheinland Hong Kong Ltd. Room 8, 25th Floor, Skyline Tower, 39 Wang Kwong Road, Kowloon Bay Kowloon, Hong Kong Hong Kong Productivity Council HKPC Building, 78 Tat Chee Avenue, Kowloon, Hong Kong				
Prüfgrundlage: Test specification	FCC Part 15 Subpart C ANSI C63.4-2003 CISPR 22:1997				
Prüfergebnis: Test Result	Das vorstehend beschriebene Gerät wurde geprüft und entspricht oben genannter Prüfgrundlage. The above mentioned product was tested and passed.				
geprüft / tested by:		kontrolliert / reviewed by:			
04.01.2005	Hugo Wan		04.01.2005	Thomas Berns	
Datum	Name	Unterschrift	Datum	Name	Unterschrift
Date	Name	Signature	Date	Name	Signature
Sonstiges: Other Aspects	FCCID: SCYEVB				
Abkürzungen:	OK, Pass, P	= entspricht Prüfgrundlage	Abbreviations:	OK, Pass, P	= passed
	Fail, F	= entspricht nicht Prüfgrundlage		Fail, F	= failed
	N/A	= nicht anwendbar		N/A	= not applicable
	NT	= nicht getestet		NT	= not tested
<p>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</p> <p>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicate in extracts. This test report does not entitle to carry any safety mark on this or similar products.</p>					

Table of Content

	Page
Cover Page	1
Table of Content	2
Product information	4
Manufacturers declarations	4
Product function and intended use.....	4
Submitted documents	4
Special accessories and auxiliary equipment.....	4
List of Test and Measurement Instruments	5
Result FCC Part 15 – Subpart C	6
Subclause 15.203 – Antenna Information..... Pass	6
Subclause 15.204 – Antenna Information..... Pass	6
Subclause 15.207 – Disturbance Voltage on AC Mains	Pass 6
Subclause 15.247 (a) – Carrier Frequency Separation.....	Pass 7
Subclause 15.247 (a) – Time of Occupancy (Dwell Time).....	Pass 8
Subclause 15.247 (a) – 20 dB Bandwidth	8
Subclause 15.247 (a) – Hopping Sequence	Pass 9
Subclause 15.247 (a) – Equal Hopping Frequency Use	Pass 10
Subclause 15.247 (a) – Receiver Input Bandwidth	Pass 11
Subclause 15.247 (a) – Receiver Hopping Capability.....	Pass 11
Subclause 15.247 (b) – Peak Output Power	Pass 11
Subclause 15.247 (b) – Band edge compliance	Pass 12
Subclause 15.247 (c) – Spurious Conducted Emissions	Pass 12
Subclause 15.247 (c) – Spurious Radiated Emissions.....	Pass 13
Appendix 1 – Test protocols	53 pages
Appendix 2 – Test setup	3 pages
Appendix 3 – Photo documentation	5 pages



Appendix 4 – Product documentation 13 pages

Product information

Manufacturers declarations

	Transmitter	Receiver
Operating frequency range	2402 - 2480 MHz	2402 - 2480 MHz
Type of modulation	FHSS modulation	FHSS modulation
Number of channels	79	79
Channel separation	1 MHz	1 MHz
Type of antenna	Integral Antenna	Integral Antenna
Antenna gain (dBi)	2	
Power level	fix	
Type of equipment	plug-in radio device	plug-in radio device
Connection to public utility power line	Yes	
Nominal voltage	V _{nor} : 110 VAC to AC/DC adaptor	V _{nor} : 110 VAC to AC/DC adaptor
Independent Operation Modes	Page scan Inquiry scan Connection state - ACL Link Connection state - SCO Link	

Product function and intended use

The test item is a Base (docking station) of a wireless headset system EVA-S-0000 based on the Bluetooth technology. LEM Evasio Professional Wireless Headset EVA-S-0000 consists of two units: Base Unit and Headset. Each of them contains a Bluetooth transceiver.

Bluetooth is a short-range radio link intended to be a cable replacement between portable and/or fixed electronic devices.

Bluetooth operates in the unlicensed ISM Band at 2.4 GHz. In the US a band of 83.5 MHz width is available. In this band, 79 RF channels spaced 1 MHz apart are defined.

The channel is represented by a pseudo-random hopping sequence through the 79 channels. The channel is divided into time slots, with a nominal slot length of 625 µs, where each slot corresponds to different RF hop frequencies. The nominal hop rate is 1600 hops/s. The symbol rate on the channel is 1 Ms/s.

Submitted documents

Circuit Diagram
PCB Layout
Block Diagram
User manual

Special accessories and auxiliary equipment

The product has been tested together with the following additional accessory:

- Charger
Model Number: Powy Travel Charger

List of Test and Measurement Instruments

	Kind of Equipment	Manufacturer	Type	S/N
<input checked="" type="checkbox"/>	Test Receiver	Rohde & Schwarz	ESH-3	890173/033
<input checked="" type="checkbox"/>	L/I/S/N	Rohde & Schwarz	ESH 3-Z5	849876/026
<input type="checkbox"/>	Oscilloscope	HP	54713B	US34510455
<input type="checkbox"/>	Test Receiver	Rohde & Schwarz	ESVP	882402/033
<input type="checkbox"/>	Absorbing Clamp	Rohde & Schwarz	MDS-21	979 3/4
<input checked="" type="checkbox"/>	Test Receiver	Rohde & Schwarz	ESVS30	842807/009
<input checked="" type="checkbox"/>	Biconical Antenna	Rohde & Schwarz	HK116	841489/015
<input checked="" type="checkbox"/>	Log.-Periodic Antenna	Rohde & Schwarz	HL223	841516/017
<input type="checkbox"/>	Universal Power Analyzer	Voltech	PM3000A	9915
<input type="checkbox"/>	Reference Impedance Network	Voltech	IEC 555 Standard	9946
<input type="checkbox"/>	AC Power Source	California Instr.	4500L	HK51895
<input type="checkbox"/>	Trip-Loop Antenna	Chase	LLA6142	1019
<input checked="" type="checkbox"/>	Double Ridge Horn Antenna	EMCO	3115	9002-3351
<input checked="" type="checkbox"/>	Double Ridge Horn Antenna	EMCO	3115	9002-3347
<input type="checkbox"/>	RF Comms Test Set	HP	8920B	US36492628
<input type="checkbox"/>	Spectrum Analyser + Tracking G.	HP	8596E	3639A00758
<input type="checkbox"/>	Signal Generator	Rohde & Schwarz	SMY 01	844146/024
<input type="checkbox"/>	Signal Generator	Rohde & Schwarz	SMY 01	844146/023
<input type="checkbox"/>	BiLog Antenna	EMCO	3143	9607-1287
<input type="checkbox"/>	Isotropic Field Probe	Holladay	HI-4422	90956
<input type="checkbox"/>	Power Amplifier	Kalmus	757-LC	7620-1
<input type="checkbox"/>	Power Amplifier	Kalmus	122-FC	7620-2
<input type="checkbox"/>	Coupling Clamp	Schaffner	CDN 126	312
<input type="checkbox"/>	Couple Device Network	Fischer	CDN-M2	9604
<input checked="" type="checkbox"/>	Spectrum Analyzer	Rohde & Schwarz	FSP30	1093.4495K30
<input type="checkbox"/>	Temperature Chamber	Binder	MK 240	9020-0028
<input type="checkbox"/>	EFT,ESD,SURGE, DIPS tester	Schaffner	Best 96	IN3796-011
<input type="checkbox"/>	Surge Generator	Schaffner	NSG650	280

Result FCC Part 15 – Subpart C

Subclause 15.203 – Antenna Information		Pass
Requirement:	No antenna other than that furnished by the responsible party shall be used with the device	
Result:	Permanent attached antenna	
Verdict:	Pass	

Subclause 15.204 – Antenna Information		Pass
Requirement:	Provide information for every antenna proposed for the use with the EUT	
Result:	a) Antenna type: Integral antenna soldered to the circuit board b) Manufacturer and model no: N.A. c) Gain with reference to an isotropic radiator: 2 dBi	
Verdict:	Pass	

Subclause 15.207 – Disturbance Voltage on AC Mains		Pass				
Test Port: AC mains input port of the charger Applied voltage: 110VAC Applicable only to equipment designed to be connected to the public utility power line. 1) Mode of operation: Charging only						
Live measurement						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak dB μ V/m	Average dB μ V/m	Limit QP (dB μ V/m)	Limit AV (dB μ V/m)	Verdict
0,15 – 0,5	0.168	55.0	40.5	66 - 56	56 - 46	Pass
	0.198	50.0	36.8			Pass
> 0,5 - 5	0.522	44.8	34.7	56	46	Pass
	3.132	49.3	43.5			Pass
> 5 - 30	-	-	-	60	50	Pass
Neutral measurement						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak dB μ V/m	Average dB μ V/m	Limit QP (dB μ V/m)	Limit AV (dB μ V/m)	Verdict
0,15 – 0,5	0.168	53.6	40.6	66 - 56	56 - 46	Pass
	0.522	44.9	35.2			Pass
> 0,5 - 5	3.138	49.0	43.5	56	46	Pass
	-	-	-			Pass
> 5 - 30	-	-	-	60	50	Pass


2) Mode of operation: operating mode that Bluetooth SCO link exists between the Base Unit and the Headset.						
Live measurement						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak dB μ V/m	Average dB μ V/m	Limit QP (dB μ V/m)	Limit AV (dB μ V/m)	Verdict
0,15 – 0,5	0.198	53.6	40.7	66 - 56	56 - 46	Pass
	0.390	50.2	41.8			Pass
> 0,5 - 5	0.522	47.8	37.9	56	46	Pass
	3.036	46.7	37.2			Pass
> 5 - 30	-	-	-	60	50	Pass
Neutral measurement						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak dB μ V/m	Average dB μ V/m	Limit QP (dB μ V/m)	Limit AV (dB μ V/m)	Verdict
0,15 – 0,5	0.258	49.9	39.7	66 - 56	56 - 46	Pass
	0.516	48.1	38.5			Pass
> 0,5 - 5	0.906	43.8	31.9	56	46	Pass
	3.072	46.2	36.2			Pass
> 5 - 30	-	-	-	60	50	Pass
<p>Result: The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz does not exceed the limits. For test results plots refer to Appendix 1, page 2-6.</p> <p>Verdict: Pass</p>						

Subclause 15.247 (a) – Carrier Frequency Separation		Pass
Requirement:	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.	
Test Specification	: FCC Part 15 Subpart A – Subclause 15.31	
Mode of operation	: Tx mode (hopping on), DH1 packet	
Port of testing	: Temporary antenna port	
Detector	: Peak	
RBW/VBW	: 100 kHz / 300 kHz	
Supply voltage	: 110VAC to AC/DC adapter	
Temperature	: 23°C	
Humidity	: 50%	
Result:	The centre frequencies of the hopping channels are separated by more than the 20dB bandwidth. For test results plots refer to Appendix 1, page 7.	
Verdict:	Pass	

Subclause 15.247 (a) – Time of Occupancy (Dwell Time)	Pass
<p>Requirement: Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.</p>	
<p>Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (hopping on), DH5 packet Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 1 MHz / 3 MHz Supply voltage : 110VAC to AC/DC adapter Temperature : 23°C Humidity : 50%</p>	
<p>Result: The screenshot in Appendix 1 page 9 shows the occurrence of a channel in a 12.8 s time period. In inquiry and page scan mode Bluetooth is using 32 hopping channels only. The frequency was used 26 times. The dwell time for the longest supported packet type is about 3 ms. As a result the average time of occupancy will not be greater than 400 ms.</p> <p>i.e. Time period calculation: $0.4 \times 32 = 12.8\text{s}$</p> <p>Limit calculation: $26 \times 2.895 \times 10^{-3} = 75.27 \times 10^{-3} \text{ s}$ $\leq 400 \times 10^{-3} \text{ s}$</p> <p>For test protocols please refer to Appendix 1, page 8-9.</p> <p>Verdict: Pass</p>	

Subclause 15.247 (a) – 20 dB Bandwidth			
<p>Requirement: Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.</p>			
<p>Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (2402MHz, 2441MHz, 2480MHz), DH5 packet Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 30 kHz / 100 kHz Supply voltage : 110VAC to AC/DC adapter Temperature : 23°C Humidity : 50%</p>			
<p>Results: For test protocols refer to Appendix 1, page 10-11.</p> <p>Verdict: Pass</p>			
Frequency (MHz)	20 dB left (MHz)	20 dB right (MHz)	20dB bandwidth (MHz)

2402	0.484	0.480	0.964
2441	0.484	0.484	0.968
2480	0.488	0.476	0.964

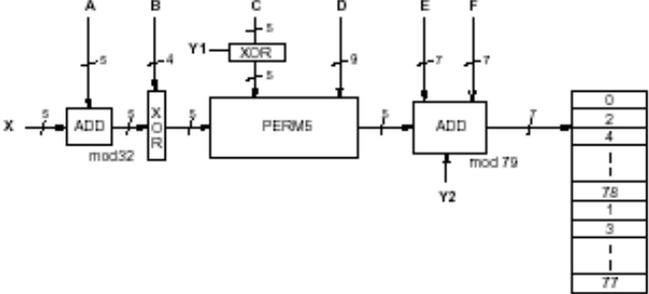Subclause 15.247 (a) – Hopping Sequence	Pass
Requirement: The hopping sequence is generated and provided with an example.	
<p>Hopping sequence</p> <p>The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master. The X input determines the phase in the 32-hop segment, whereas Y1 and Y2 selects between master-to-slave and slave-to-master transmission. The inputs A to D determine the ordering within the segment, the inputs E and F determine the mapping onto the hop frequencies.</p> <div style="text-align: center;">  </div>	

Example data:

Hop sequence {k} for CONNECTION STATE:
 CLK start: 0x0000010
 ULAP: 0x00000000
 #ticks: 00 02 | 04 06 | 08 0a | 0c 0e | 10 12 | 14 16 | 18 1a | 1c 1e |

0x0000010:	08 66	10 70	12 19	14 23	16 01	18 05	20 33	22 37
0x0000030:	24 03	26 07	28 35	30 39	32 72	34 76	36 25	38 29
0x0000050:	40 74	42 78	44 27	46 31	48 09	50 13	52 41	54 45
0x0000070:	56 11	58 15	60 43	62 47	32 17	36 19	34 49	38 51
0x0000090:	40 21	44 23	42 53	46 55	48 33	52 35	50 65	54 67
0x00000b0:	56 37	60 39	58 69	62 71	64 25	68 27	66 57	70 59
0x00000d0:	72 29	76 31	74 61	78 63	01 41	05 43	03 73	07 75
0x00000f0:	09 45	13 47	11 77	15 00	64 49	66 53	68 02	70 06
0x0000110:	01 51	03 55	05 04	07 08	72 57	74 61	76 10	78 14
0x0000130:	09 59	11 63	13 12	15 16	17 65	19 69	21 18	23 22
0x0000150:	33 67	35 71	37 20	39 24	25 73	27 77	29 26	31 30
0x0000170:	41 75	43 00	45 28	47 32	17 02	21 04	19 34	23 36
0x0000190:	33 06	37 08	35 38	39 40	25 10	29 12	27 42	31 44
0x00001b0:	41 14	45 16	43 46	47 48	49 18	53 20	51 50	55 52
0x00001d0:	65 22	69 24	67 54	71 56	57 26	61 28	59 58	63 60
0x00001f0:	73 30	77 32	75 62	00 64	49 34	51 42	57 66	59 74
0x0000210:	53 36	55 44	61 68	63 76	65 50	67 58	73 03	75 11
0x0000230:	69 52	71 60	77 05	00 13	02 38	04 46	10 70	12 78
0x0000250:	06 40	08 48	14 72	16 01	18 54	20 62	26 07	28 15
0x0000270:	22 56	24 64	30 09	32 17	02 66	06 74	10 19	14 27
0x0000290:	04 70	08 78	12 23	16 31	18 03	22 11	26 35	30 43
0x00002b0:	20 07	24 15	28 39	32 47	34 68	38 76	42 21	46 29
0x00002d0:	36 72	40 01	44 25	48 33	50 05	54 13	58 37	62 45
0x00002f0:	52 09	56 17	60 41	64 49	34 19	36 35	50 51	52 67
0x0000310:	38 21	40 37	54 53	56 69	42 27	44 43	58 59	60 75
0x0000330:	46 29	48 45	62 61	64 77	66 23	68 39	03 55	05 71
0x0000350:	70 25	72 41	07 57	09 73	74 31	76 47	11 63	13 00
0x0000370:	78 33	01 49	15 65	17 02	66 51	70 67	03 04	07 20
0x0000390:	68 55	72 71	05 08	09 24	74 59	78 75	11 12	15 28
0x00003b0:	76 63	01 00	13 16	17 32	19 53	23 69	35 06	39 22
0x00003d0:	21 57	25 73	37 10	41 26	27 61	31 77	43 14	47 30
0x00003f0:	29 65	33 02	45 18	49 34	19 04	21 08	23 20	25 24

Subclause 15.247 (a) – Equal Hopping Frequency Use	Pass
Requirement: Each of the transmitter's hopping channels is used equally on average.	
Equal hopping frequency use	
The EUT complies with the Bluetooth RF specifications. For details refer to the Bluetooth standard.	

Subclause 15.247 (a) – Receiver Input Bandwidth	Pass
Requirement: The associated receiver(s) complies with the requirement that its input bandwidth matches the bandwidth of the transmitted signal.	
Receiver input bandwidth The receiver bandwidth is equal to the receiver bandwidth in the 79 hopping channel mode, which is 1 MHz. The receiver bandwidth was verified during Bluetooth RF conformance testing.	

Subclause 15.247 (a) – Receiver Hopping Capability	Pass
Requirement: The associated receiver has the ability to shift frequencies in synchronisation with the transmitted signals.	
Receiver hopping Capability The EUT complies with the Bluetooth RF specifications. For details refer to the Bluetooth standard.	

Subclause 15.247 (b) – Peak Output Power	Pass																								
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (2402MHz, 2441MHz, 2480MHz), DH1 packet Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 1 MHz / 3 MHz Supply voltage : 110VAC to AC/DC adapter Temperature : 23°C Humidity : 50%																									
Requirement: For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 Watt. For all other frequency hopping systems in the 2400 – 2483.5 MHz band: 0.125 Watts.																									
Result All three transmit frequency modes comply with the maximum peak output power limit. For test protocols please refer to Appendix 1, page 12-13.																									
<table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Maximum peak output power (dBm)</th> <th>Cable attenuation (dB)</th> <th>Output power (dBm)</th> <th>Limit (W/dBm)</th> <th>Verdict</th> </tr> </thead> <tbody> <tr> <td>2402</td> <td>1.95</td> <td>3.52</td> <td>5.47</td> <td>1 / 30.0</td> <td>Pass</td> </tr> <tr> <td>2441</td> <td>1.88</td> <td>3.65</td> <td>5.53</td> <td>1 / 30.0</td> <td>Pass</td> </tr> <tr> <td>2480</td> <td>1.85</td> <td>3.60</td> <td>5.45</td> <td>1 / 30.0</td> <td>Pass</td> </tr> </tbody> </table>	Frequency (MHz)	Maximum peak output power (dBm)	Cable attenuation (dB)	Output power (dBm)	Limit (W/dBm)	Verdict	2402	1.95	3.52	5.47	1 / 30.0	Pass	2441	1.88	3.65	5.53	1 / 30.0	Pass	2480	1.85	3.60	5.45	1 / 30.0	Pass	
Frequency (MHz)	Maximum peak output power (dBm)	Cable attenuation (dB)	Output power (dBm)	Limit (W/dBm)	Verdict																				
2402	1.95	3.52	5.47	1 / 30.0	Pass																				
2441	1.88	3.65	5.53	1 / 30.0	Pass																				
2480	1.85	3.60	5.45	1 / 30.0	Pass																				

Subclause 15.247 (b) – Band edge compliance		Pass
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (2402MHz, 2441MHz, 2480MHz), DH1 packet Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 300 kHz / 1 MHz Supply voltage : 110VAC to AC/DC adapter Temperature : 23°C Humidity : 50%		
Requirement: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.		
Result There is no peak found outside any 100 kHz bandwidth of the operating frequency band in the three transmit frequency. All three transmit frequency modes comply with the limit stated in subclause 15.247(c). For test protocols refer to Appendix 1, page 14-15.		

Subclause 15.247 (c) – Spurious Conducted Emissions		Pass			
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (2402MHz, 2441MHz, 2480MHz), DH1 packet Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 100 kHz / 300 kHz Supply voltage : 110VAC to AC/DC adapter Temperature : 23 °C Humidity : 50 %					
Requirement: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Result There is no peak found outside any 100kHz bandwidth of the operating frequency band in the three transmit frequency. All three transmit frequency modes comply with the limit stated in subclause 15.247(c). For test protocols refer to Appendix 1, page 16-22.					
Operating frequency (MHz)	Spurious frequency (MHz)	Spurious Level (dBm)	Reference value (dBm)	Delta (dB)	Verdict
2402	No peak found	-	-	-	Pass
2441	No peak found	-	-	-	Pass
2480	No peak found	-	-	-	Pass

Subclause 15.247 (c) – Spurious Radiated Emissions							Pass
Test Specification : ANSI C63.4 - 2003 Mode of operation : Tx mode (2402MHz, 2441MHz, 2480MHz), DH1 packet Port of testing : Enclosure Detector : Peak RBW/VBW : 100 kHz / 300 kHz for f < 1 GHz 1 MHz / 3 MHz for f > 1 GHz Supply voltage : 110VAC to AC/DC adapter Temperature : 23°C Humidity : 50%							
Requirement: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.							
Result All three transmit frequency modes comply with the field strength within the restricted bands. For test protocols refer to Appendix 1, page 23-53.							
Tx frequency 2402MHz				Vertical Polarization			
Freq MHz	Reading dBuV	AF dB(1/m)	Cable att. dB	Pre-amp dB	Filter att. dB	Level dBuV/m	Limit/ Detector dBuV/m
No peak found	-	-	-	-	-	-	-
Tx frequency 2402MHz				Horizontal Polarization			
Freq MHz	Reading dBuV	AF dB(1/m)	Cable att. dB	Pre-amp dB	Filter att. dB	Level dBuV/m	Limit/ Detector dBuV/m
No peak found	-	-	-	-	-	-	-
Tx frequency 2441MHz				Vertical Polarization			
Freq MHz	Reading dBuV	AF dB(1/m)	Cable att. dB	Pre-amp dB	Filter att. dB	Level dBuV/m	Limit/ Detector dBuV/m
No peak found	-	-	-	-	-	-	-
Tx frequency 2441MHz				Horizontal Polarization			
Freq MHz	Reading dBuV	AF dB(1/m)	Cable att. dB	Pre-amp dB	Filter att. dB	Level dBuV/m	Limit/ Detector dBuV/m
No peak found	-	-	-	-	-	-	-
Tx frequency 2480MHz				Vertical Polarization			
Freq MHz	Reading dBuV	AF dB(1/m)	Cable att. dB	Pre-amp dB	Filter att. dB	Level dBuV/m	Limit/ Detector dBuV/m
No peak found	-	-	-	-	-	-	-

Tx frequency 2480MHz		Horizontal Polarization					
Freq MHz	Reading dBuV	AF dB(1/m)	Cable att. dB	Pre-amp dB	Filter att. dB	Level dBuV/m	Limit/ Detector dBuV/m
No peak found	-	-	-	-	-	-	-

Appendix 1

Test results

Disturbance Voltage on AC Mains

Date: 21 Dec 2004
 EUT: LEM Evasio Professional Wireless Headset (Base Unit)
 Company: LEM Industries
 Humidity: 50%
 Temperature: 23°C
 Voltage supply: 110VAC to AC/DC adapter
 Test by: Hugo Wan

Op. mode: Charging only

Live measurement

Frequency (MHz)	QP reading (dB μ V)	Av reading (dB μ V)	Results
0.168	55.0	40.5	Pass
0.198	50.0	36.8	Pass
0.522	44.8	34.7	Pass
3.132	49.3	43.5	Pass

Neutral measurement

Frequency (MHz)	QP reading (dB μ V)	Av reading (dB μ V)	Results
0.168	53.6	40.6	Pass
0.522	44.9	35.2	Pass
3.138	49.0	43.5	Pass


Op. mode: Operating


Live measurement


Frequency (MHz)	QP reading (dB μ V)	Av reading (dB μ V)	Results
0.198	53.6	40.7	Pass
0.390	50.2	41.8	Pass
0.522	47.8	37.9	Pass
3.036	46.7	37.2	Pass


Neutral measurement

Frequency (MHz)	QP reading (dB μ V)	Av reading (dB μ V)	Results
0.258	49.9	39.7	Pass
0.516	48.1	38.5	Pass
0.906	43.8	31.9	Pass
3.072	46.2	36.2	Pass

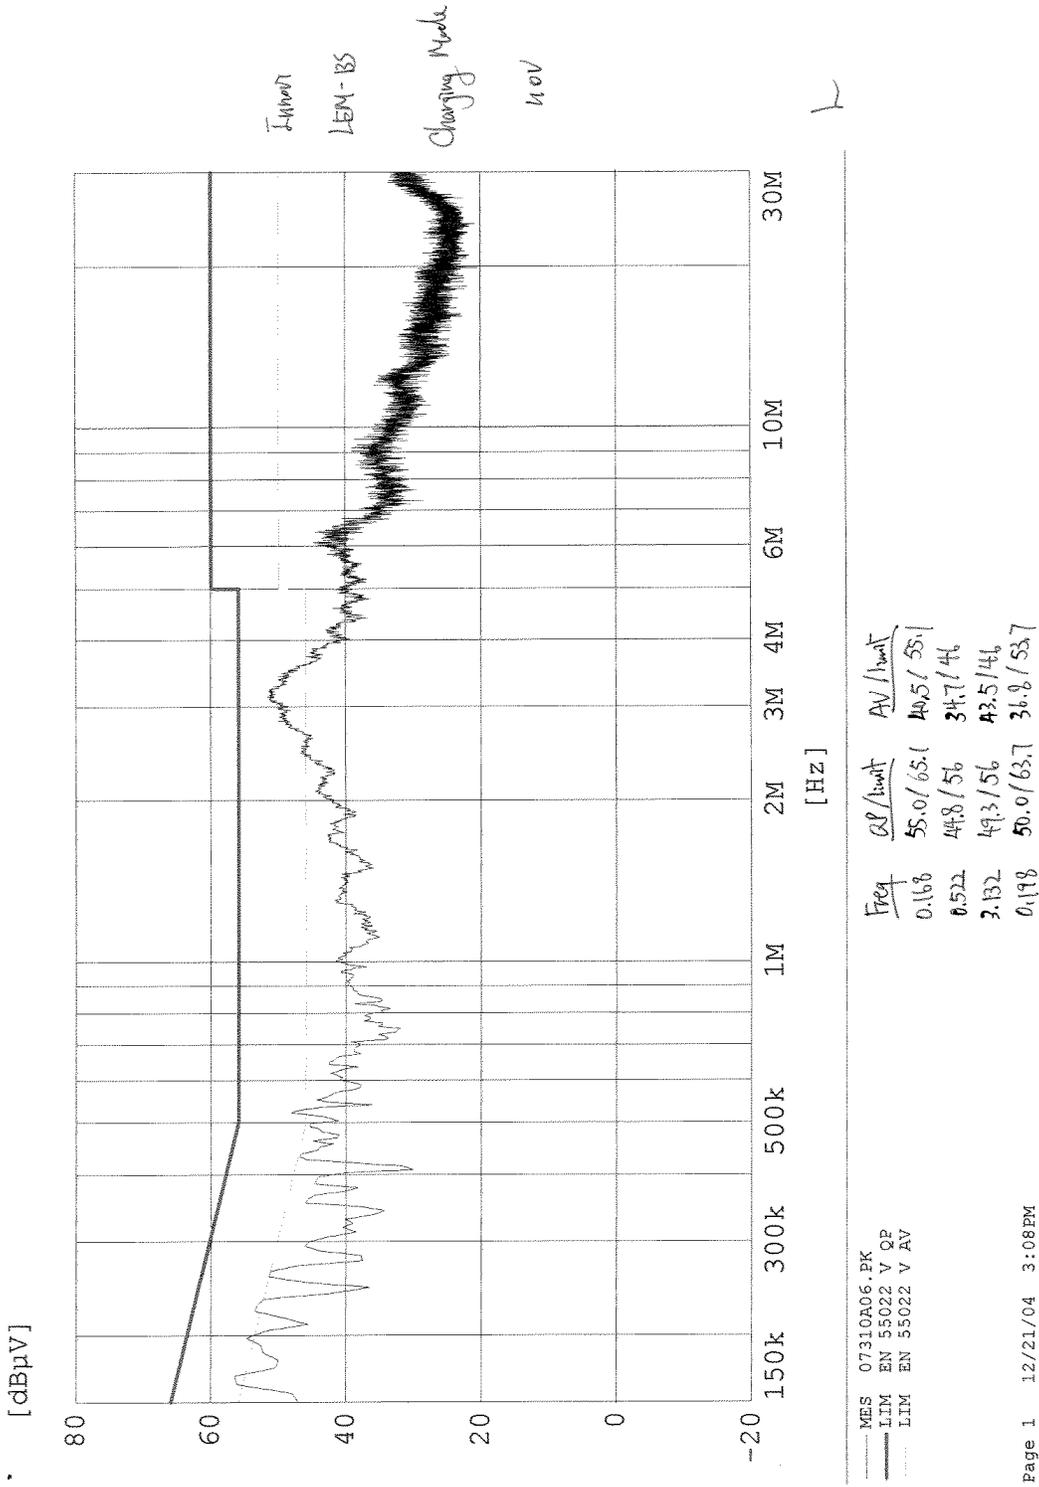

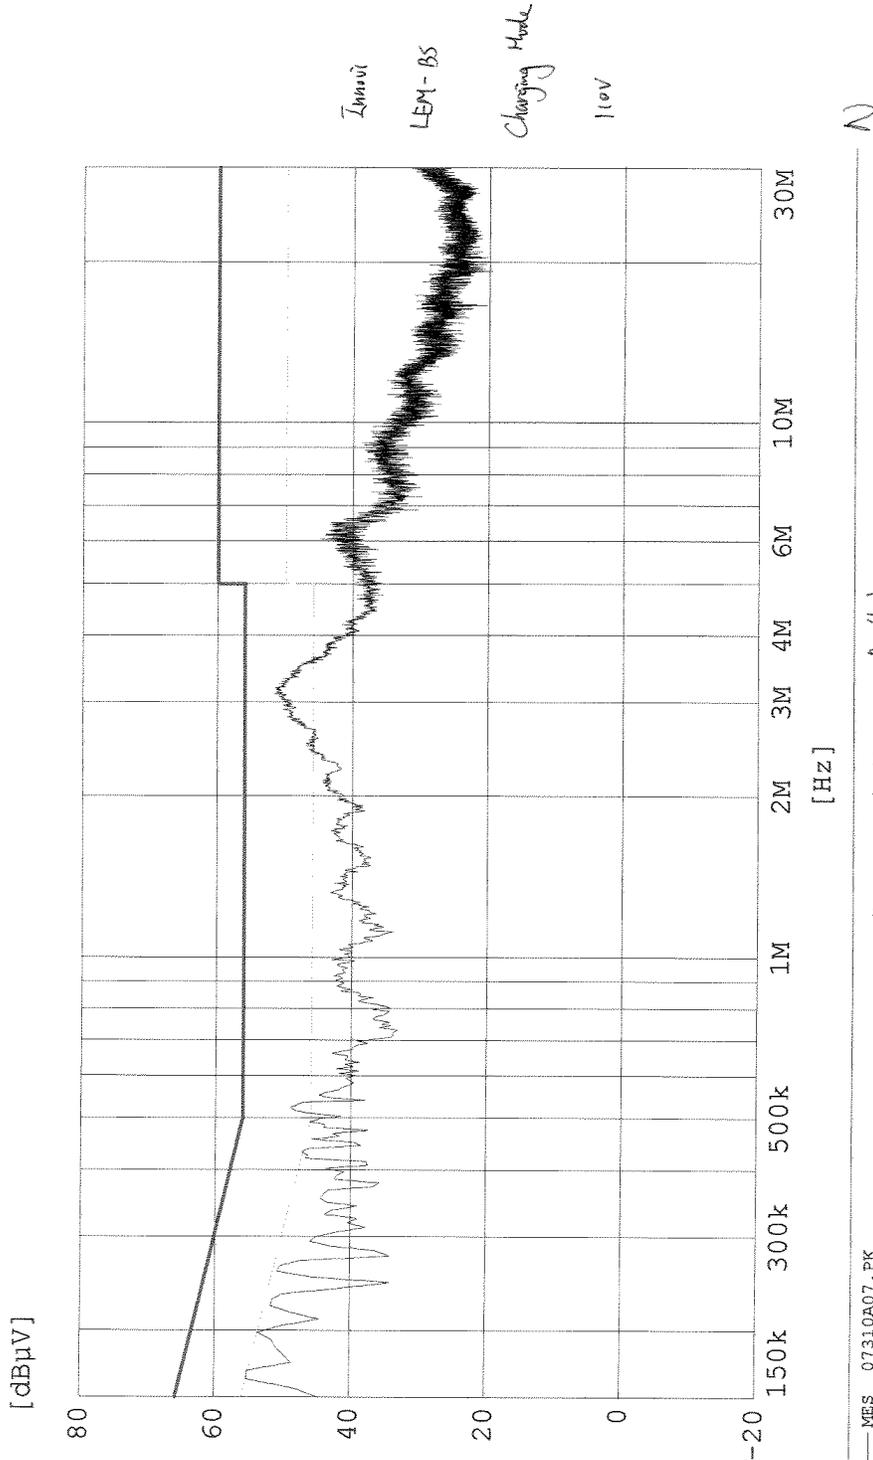

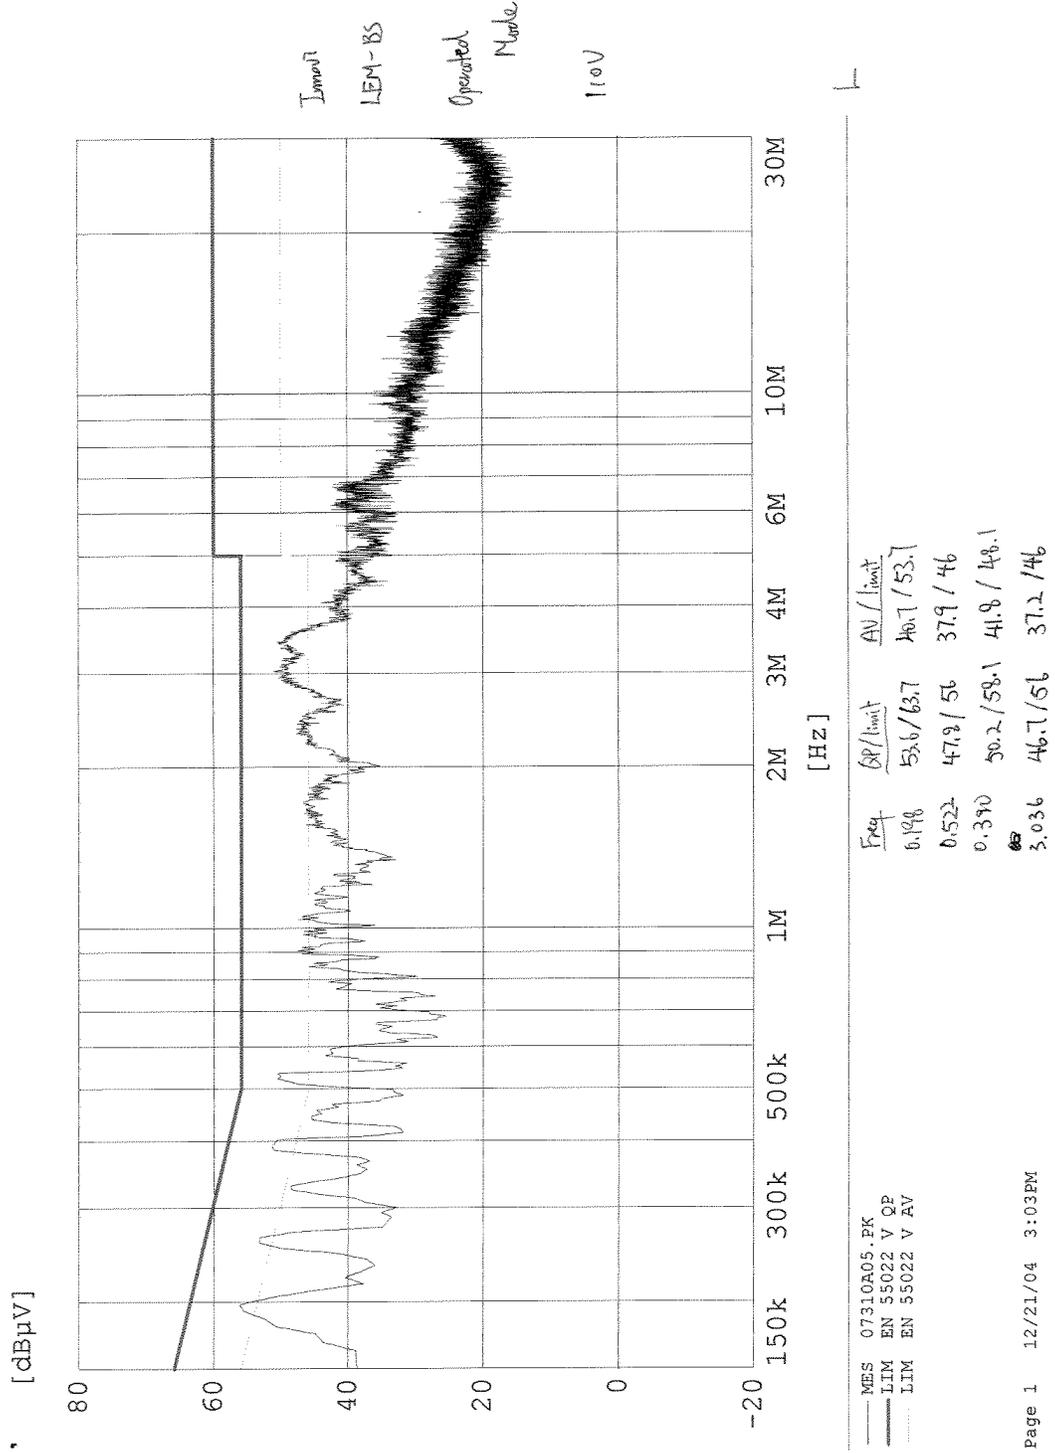

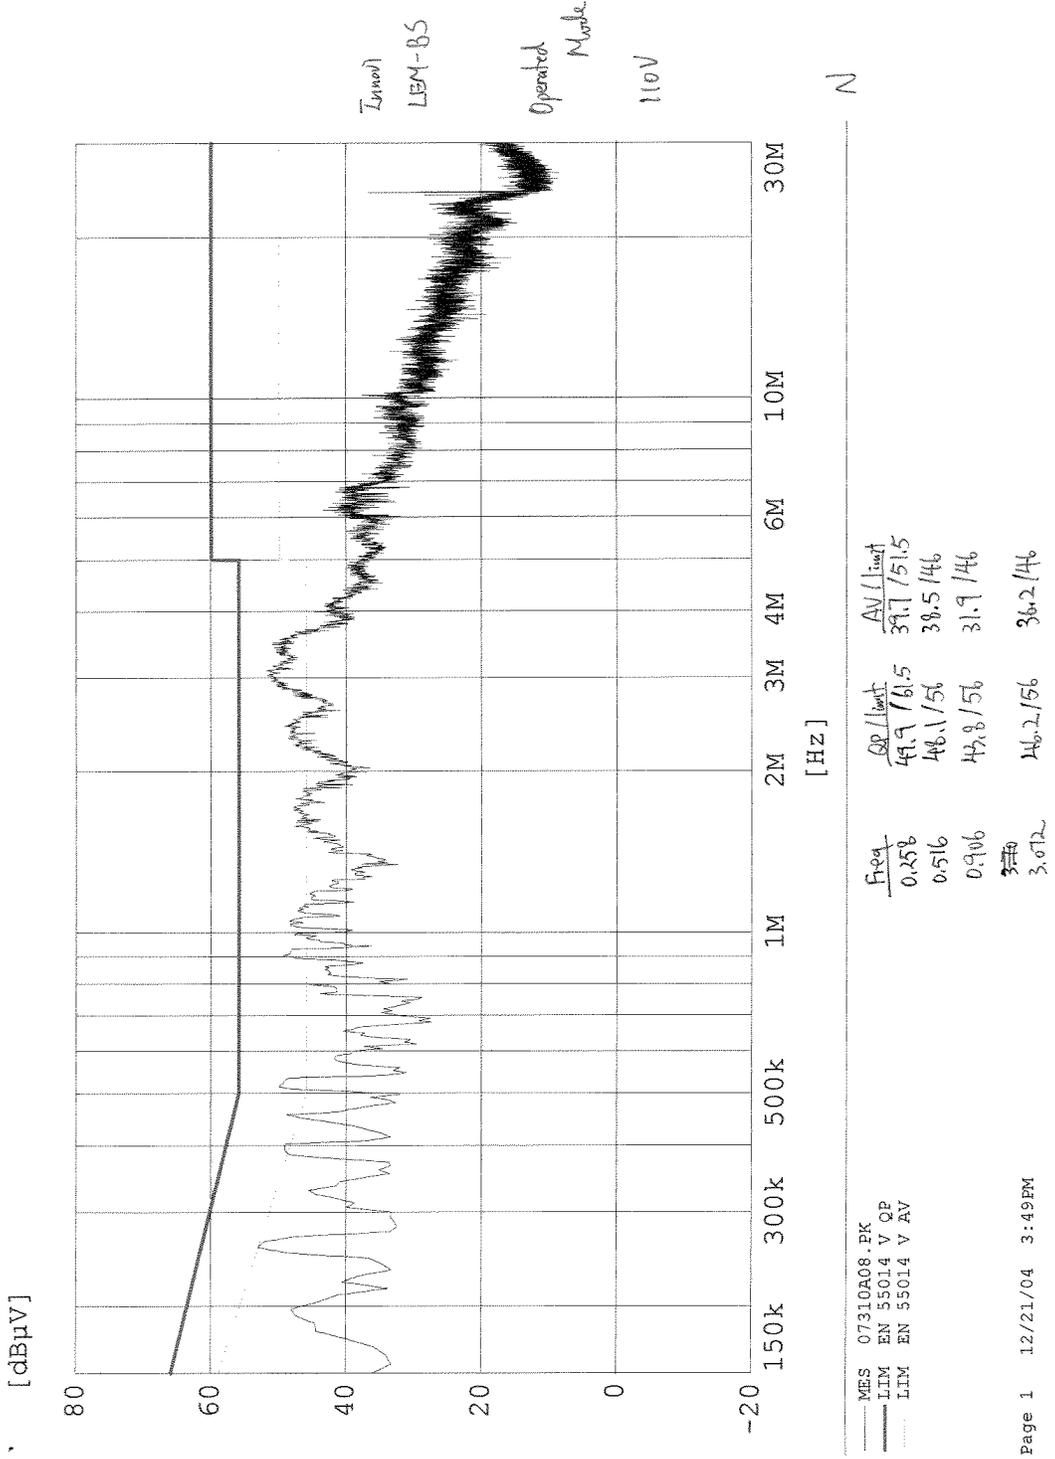

Dwell Time


Date: 29 Nov 2004
 EUT: LEM Evasio Professional Wireless Headset (Base Unit)
 Company: LEM Industries
 Humidity: 50%
 Temperature: 23°C
 Voltage supply: 110VAC to AC/DC adapter
 Test by: Hugo Wan
 Op. mode: Hopping on

Burst Duration (ms)	Number of hopping	Time of occupancy (s)	Results
2.895	26	$0.002895 \times 26 = 0.07527$	Pass



DELTA MARKER 2
 2.895 ms
 Ref 10 dBm *Att 30 dB

RBW 1 MHz Delta 2 [T1]
 VBW 3 MHz -0.23 dB
 SWT 4 ms 2.895000 ms

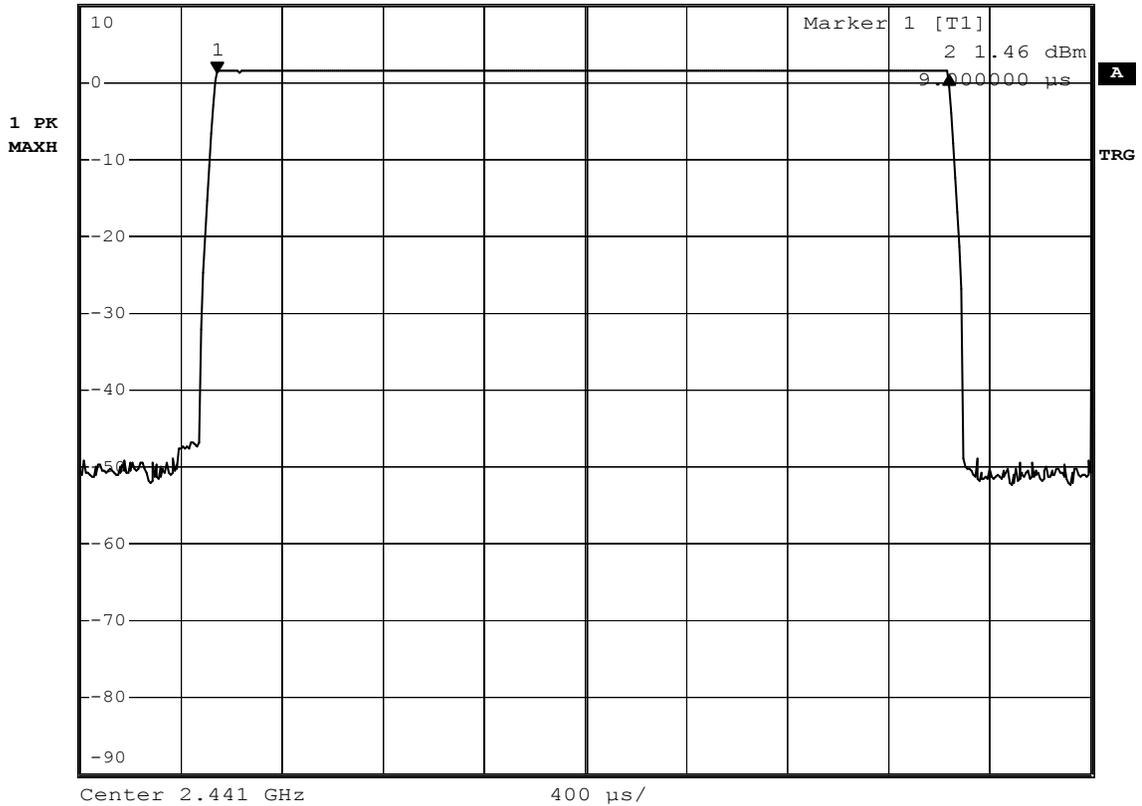


Date: 29.NOV.2004 15:28:23



RBW 1 MHz
VBW 3 MHz
SWT 12.8 s

Ref 10 dBm *Att 30 dB

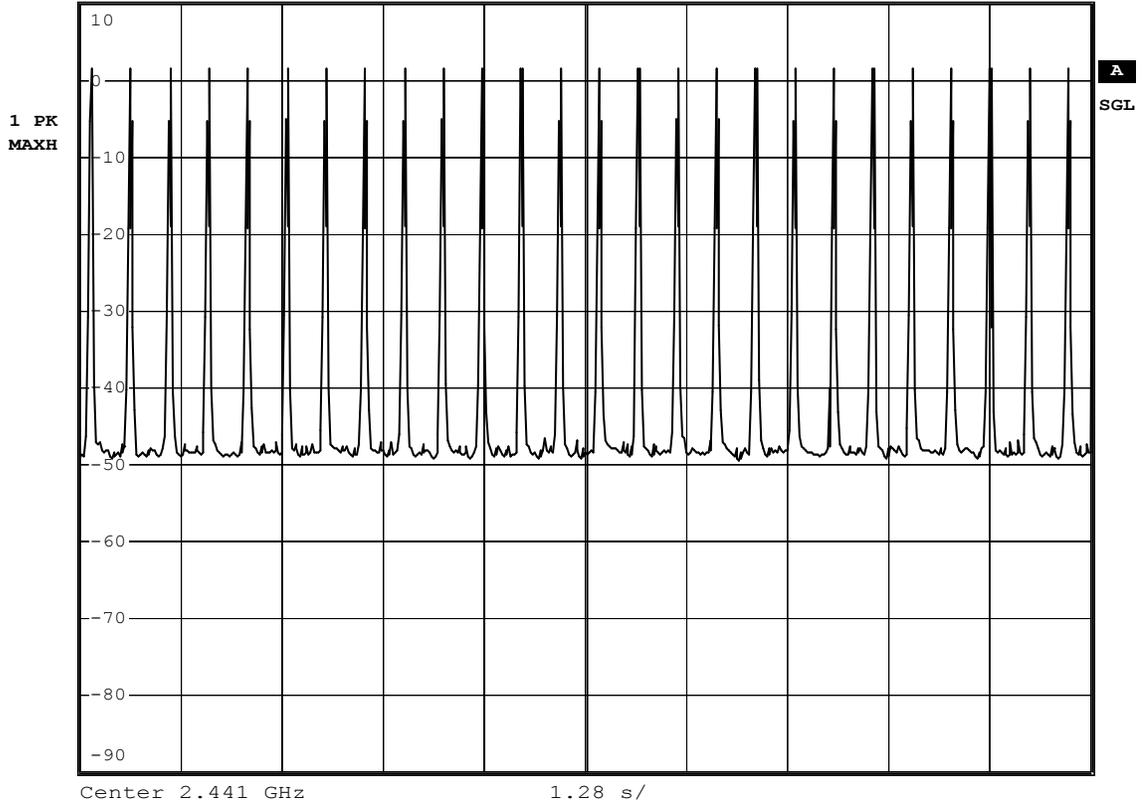


Date: 29.NOV.2004 15:28:58

20dB Bandwidth


Date: 29 Nov 2004
 EUT: LEM Evasio Professional Wireless Headset (Base Unit)
 Company: LEM Industries
 Humidity: 50%
 Temperature: 23°C
 Voltage supply: 110VAC to AC/DC adapter
 Test by: Hugo Wan
 Op. mode: TX mode, DH5 with PRBS9 payload

Tx frequency (MHz)	Δf_L (MHz)	Δf_H (MHz)	$ \Delta f_H + \Delta f_L $ (MHz)	Results
2402	0.484	0.480	0.964	Pass
2441	0.484	0.484	0.968	Pass
2480	0.488	0.476	0.964	Pass

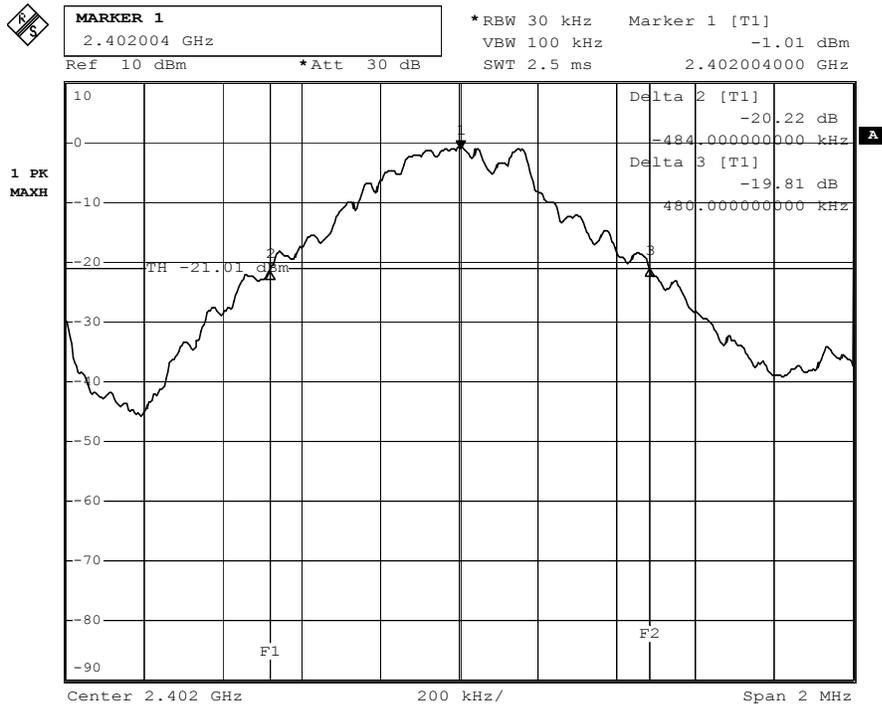


Date: 29.NOV.2004 15:32:35

Tx frequency: 2402MHz

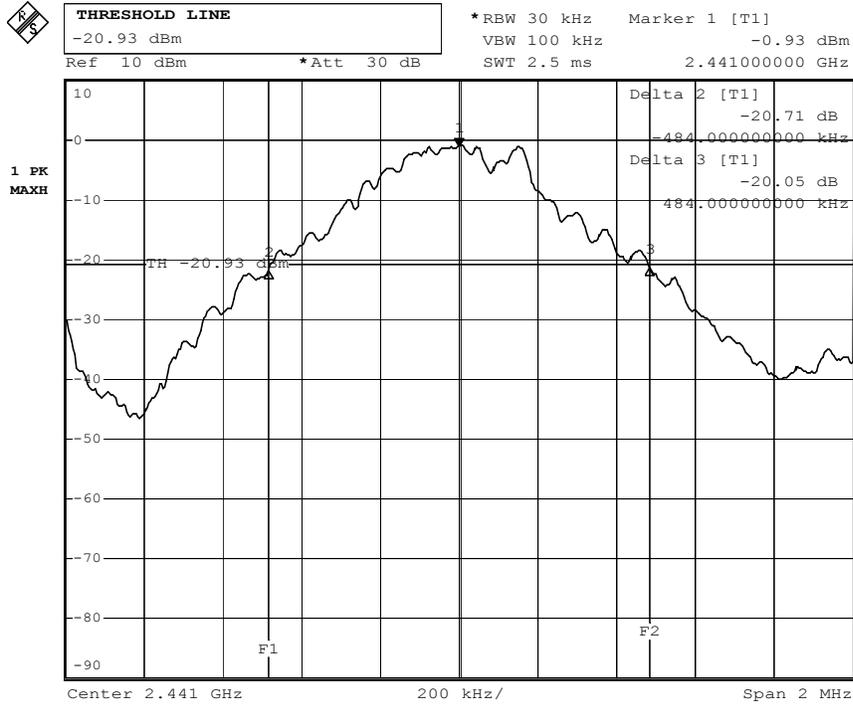

Date: 29.NOV.2004 15:34:42

Tx frequency: 2441MHz

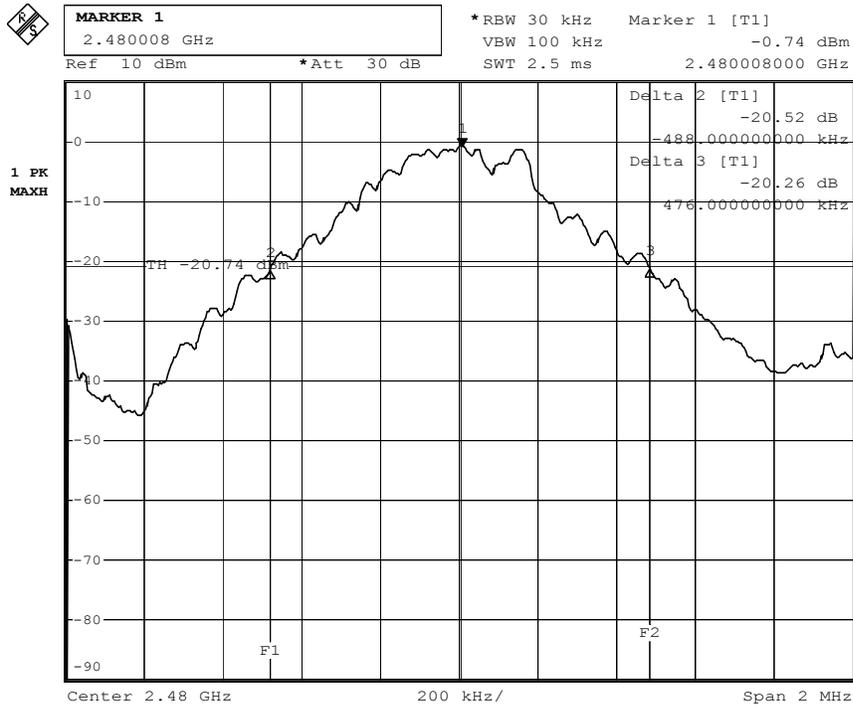


Date: 29.NOV.2004 15:37:58

Tx frequency: 2480MHz

Peak Output Power


Date: 29 Nov 2004
 EUT: LEM Evasio Professional Wireless Headset (Base Unit)
 Company: LEM Industries
 Humidity: 50%
 Temperature: 23°C
 Voltage supply: 110VAC to AC/DC adapter
 Test by: Hugo Wan
 Op. mode: TX mode, DH1 with PRBS9 payload

Tx Frequency (MHz)	Power P _{PK} (dBm)	Cable Attenuation (dB)	Actual Peak Power (dBm)	Results
2402	1.95	3.52	5.47	Pass
2441	1.88	3.65	5.53	Pass
2480	1.85	3.60	5.45	Pass

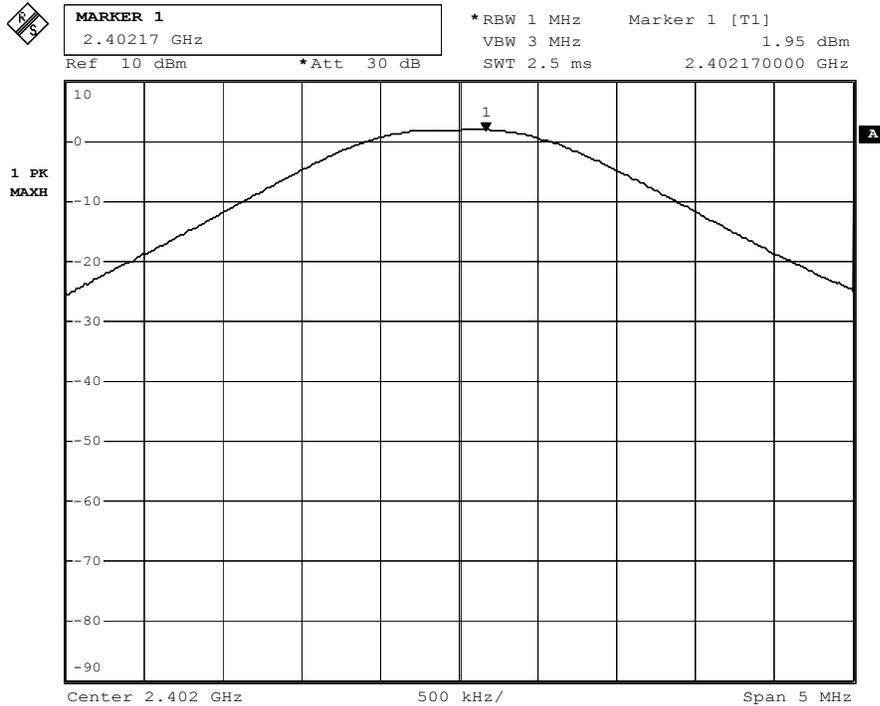


Date: 29.NOV.2004 15:39:11

Tx frequency: 2402MHz

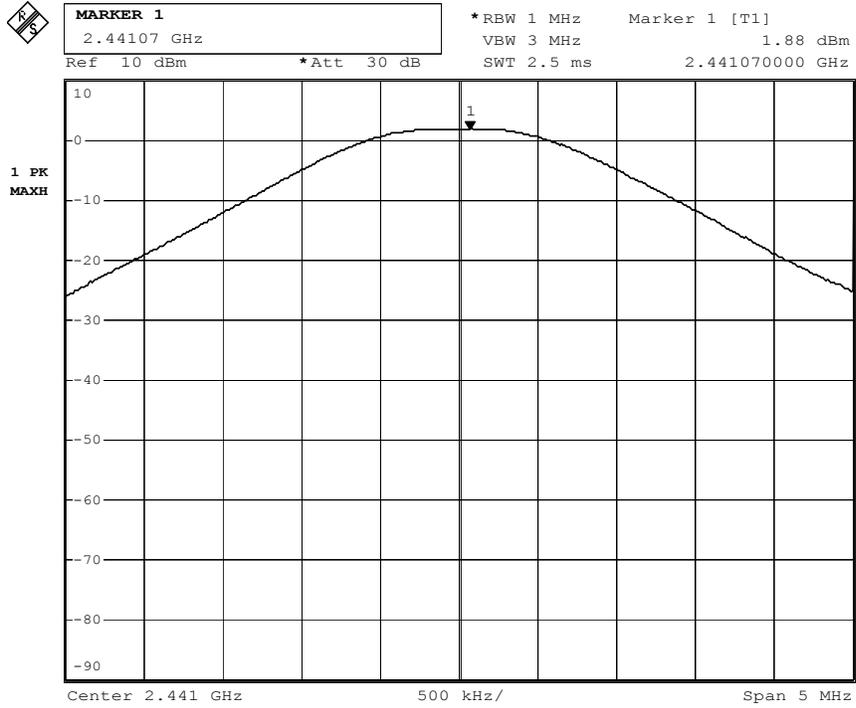

Date: 29.NOV.2004 15:39:53

Tx frequency: 2441MHz

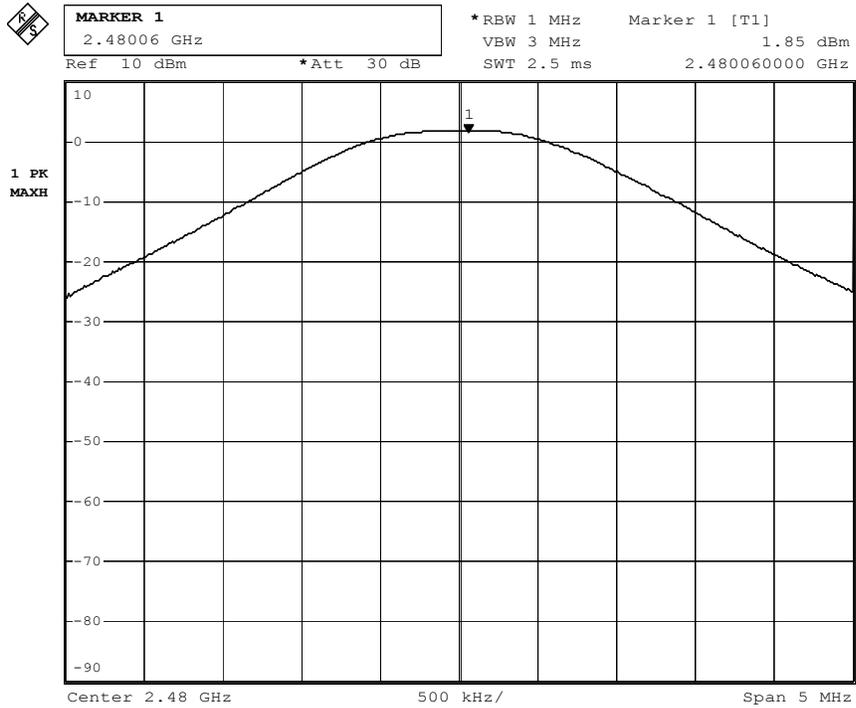


Date: 29.NOV.2004 15:40:24

Tx frequency: 2480MHz

Band Edge Compliance


Date: 29 Nov 2004
 EUT: LEM Evasio Professional Wireless Headset (Base Unit)
 Company: LEM Industries
 Humidity: 50%
 Temperature: 23°C
 Voltage supply: 110VAC to AC/DC adapter
 Test by: Hugo Wan
 Op. mode: TX mode, DH1 with PRBS9 payload

Tx Frequency (MHz)	Peak in band Power level (dBm)	RF power outside 100kHz BW (MHz)	RF power difference outside 100kHz BW (dB)	Results
2402	1.84	No Peak	-	Pass
2480	1.71	No Peak	-	Pass

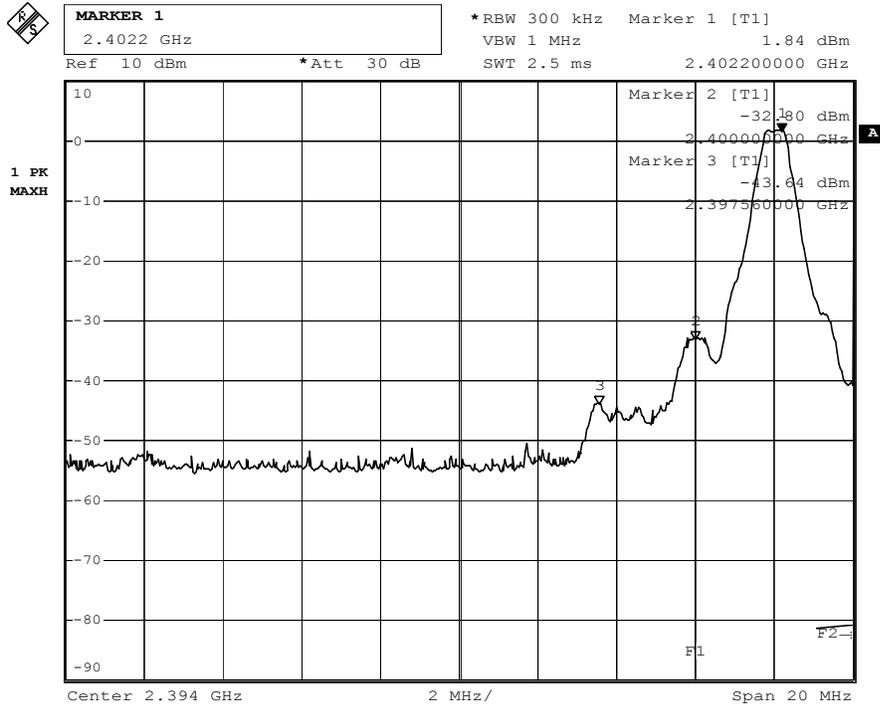


Date: 29.NOV.2004 15:43:52

Tx frequency: 2402MHz

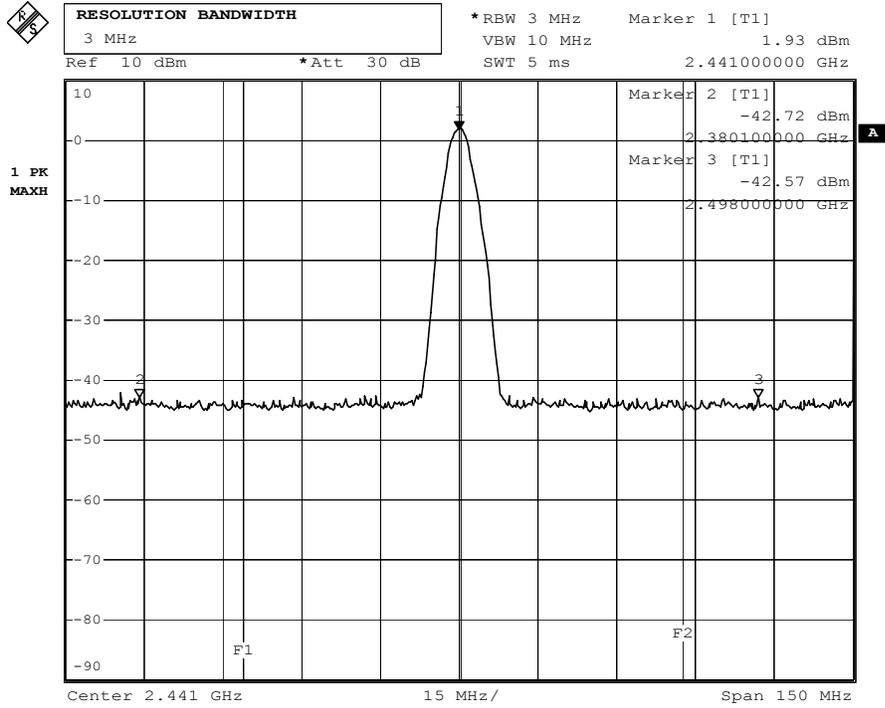

Date: 29.NOV.2004 15:42:31

Tx frequency: 2441MHz

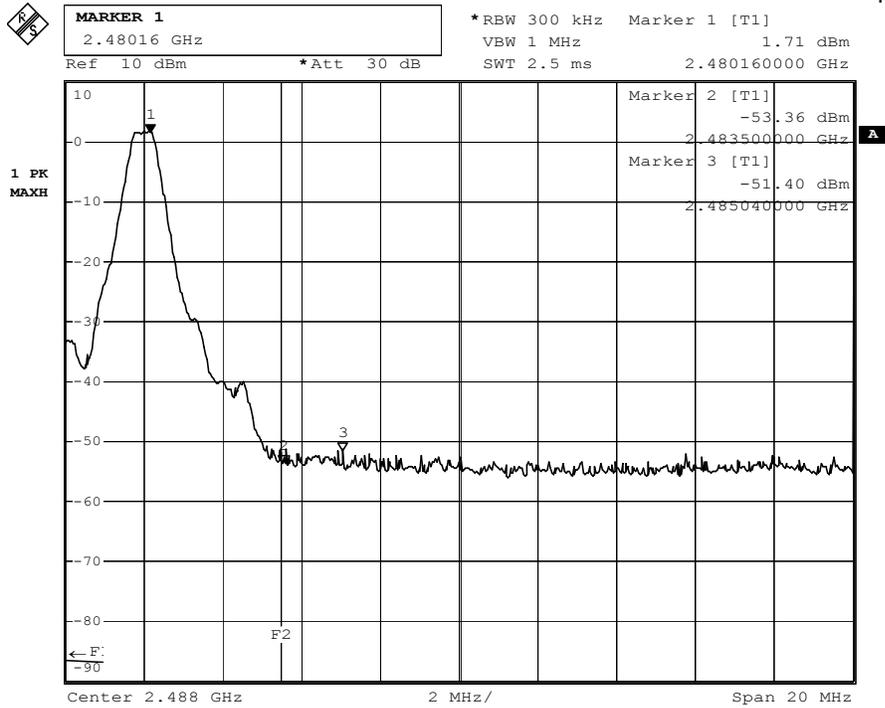

Date: 29.NOV.2004 15:41:14

Tx frequency: 2480MHz

Spurious Emissions - Conducted

Date: 29 Nov 2004
 EUT: LEM Evasio Professional Wireless Headset (Base Unit)
 Company: LEM Industries
 Humidity: 50%
 Temperature: 23°C
 Voltage supply: 110VAC to AC/DC adapter
 Test by: Hugo Wan
 Op. mode: TX mode, DH1 with PRBS9 payload

Tx frequency : 2402MHz


Spurious Frequency (MHz)	Power level (dBm)	Reference value (dBm)	Delta to reference level (dB)	Results
No peak found	-	-	-	Pass

Tx frequency : 2441MHz

Spurious Frequency (MHz)	Power level (dBm)	Reference value (dBm)	Delta to reference level (dB)	Results
No peak found	-	-	-	Pass


Tx frequency : 2480MHz

Spurious Frequency (MHz)	Power level (dBm)	Reference value (dBm)	Delta to reference level (dB)	Results
No peak found	-	-	-	Pass

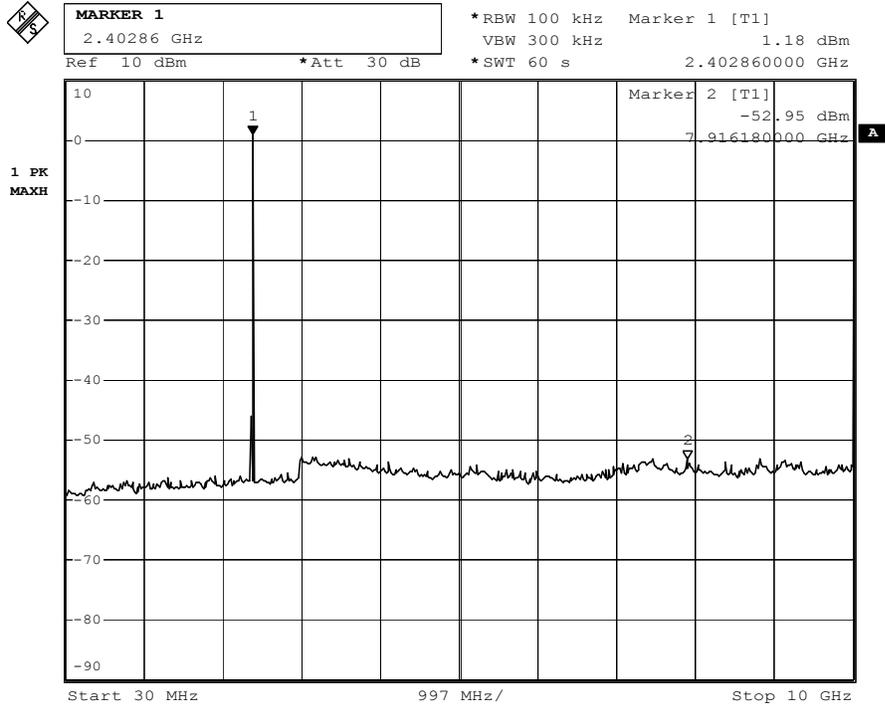


Date: 29.NOV.2004 15:54:15

Tx frequency: 2402MHz

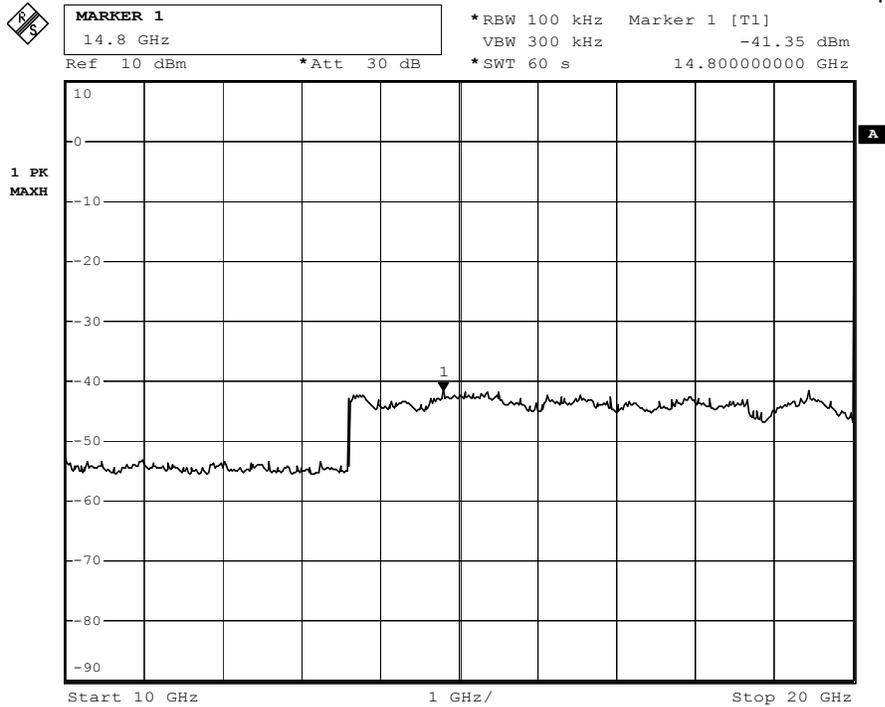


Date: 29.NOV.2004 15:59:17

Tx frequency: 2402MHz

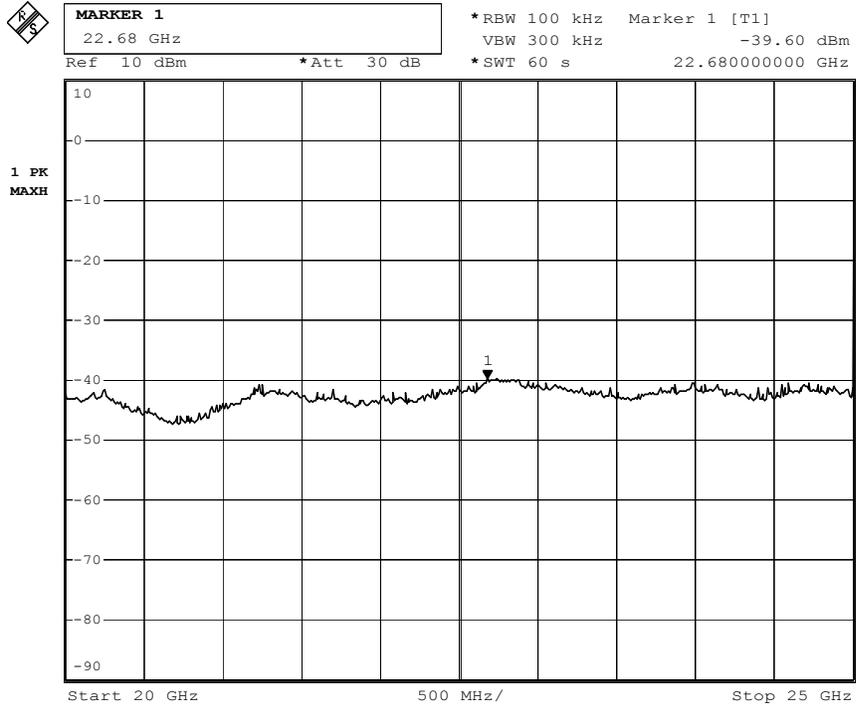


Date: 29.NOV.2004 16:03:59

Tx frequency: 2402MHz

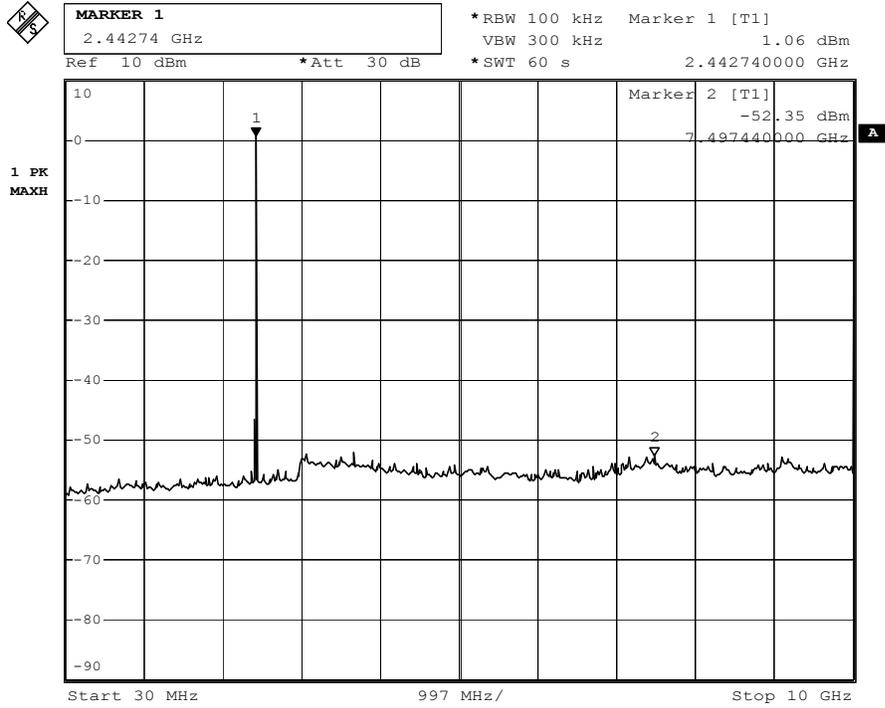

Date: 29.NOV.2004 16:07:51

Tx frequency: 2441MHz

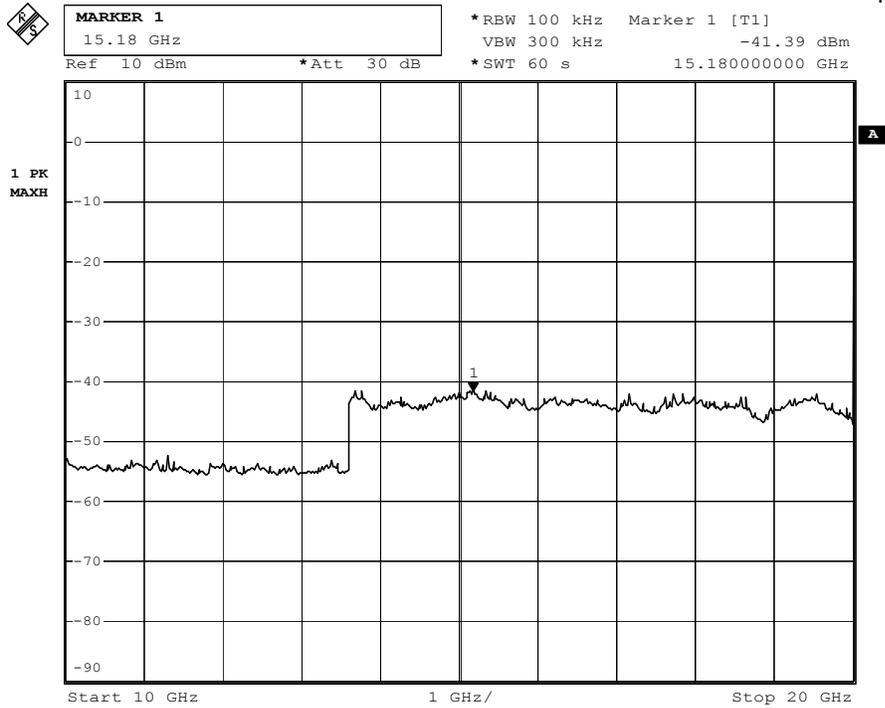


Date: 29.NOV.2004 16:12:57

Tx frequency: 2441MHz




MARKER 1
22.78 GHz

*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -39.35 dBm
*Att 30 dB
*SWT 60 s 22.78000000 GHz

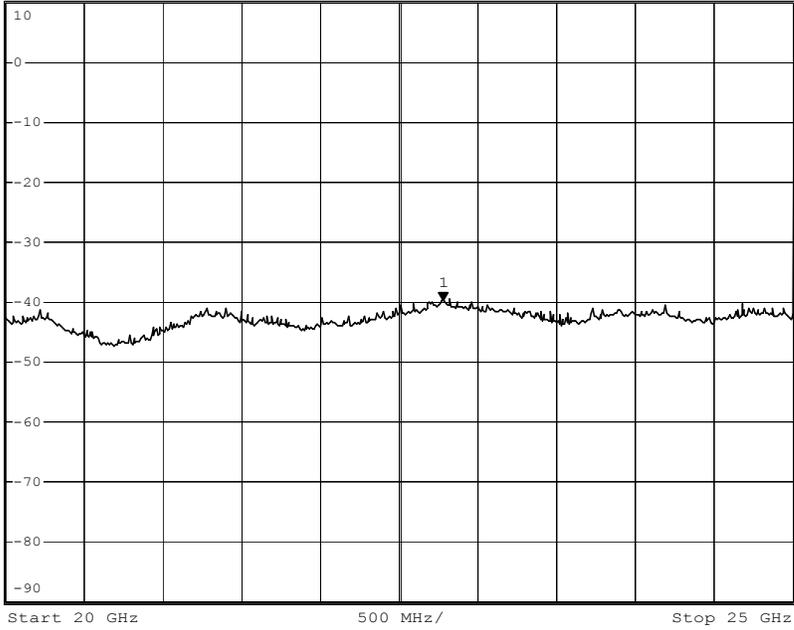


Date: 29.NOV.2004 16:15:54

Tx frequency: 2441MHz

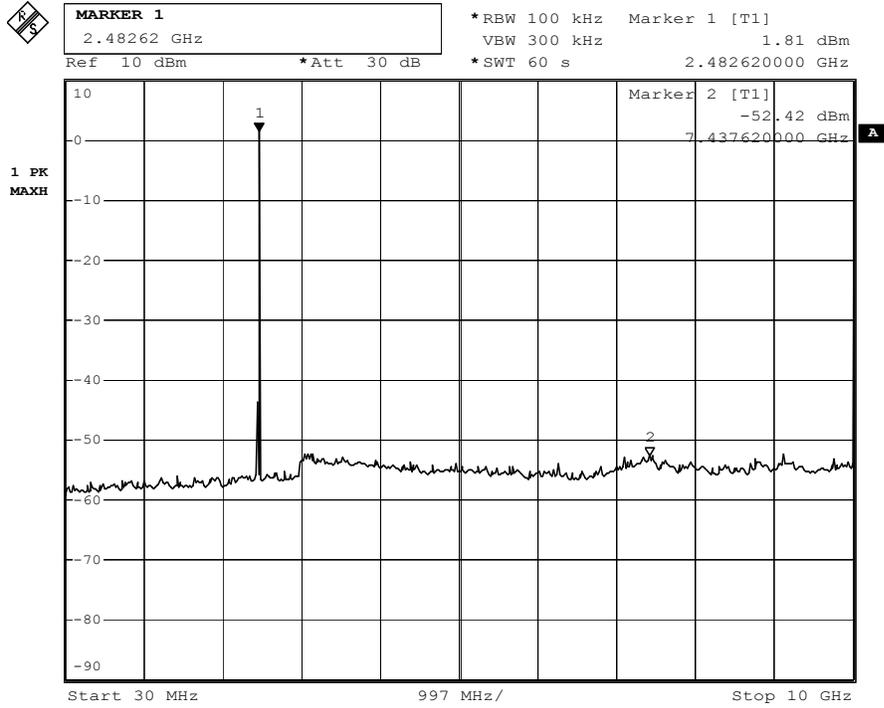

Date: 29.NOV.2004 18:15:23

Tx frequency: 2480MHz

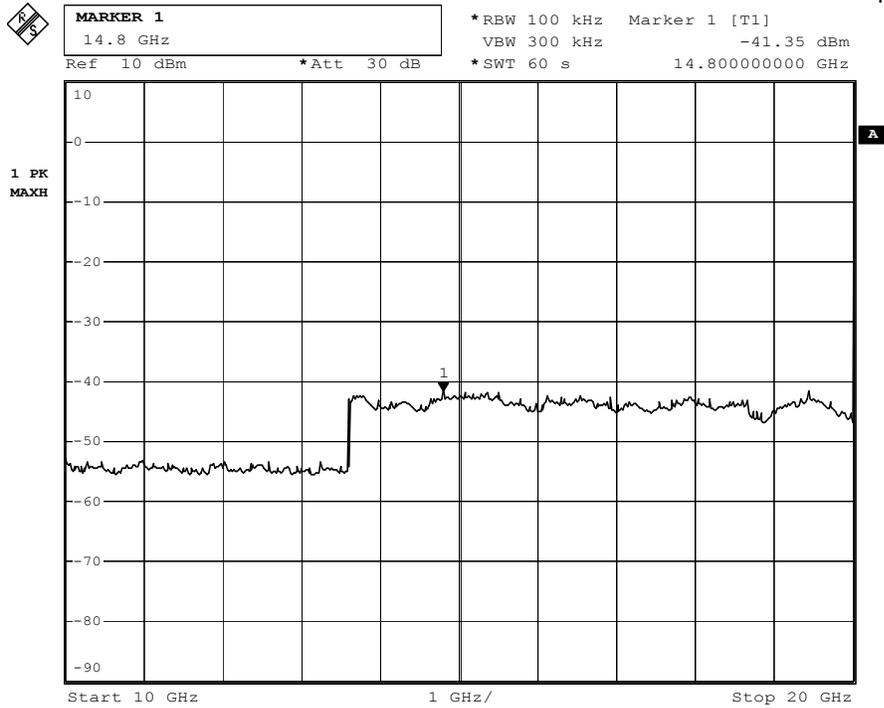


Date: 29.NOV.2004 15:59:17

Tx frequency: 2480MHz



MARKER 1
22.76 GHz

*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -38.80 dBm
*Att 30 dB
*SWT 60 s 22.76000000 GHz

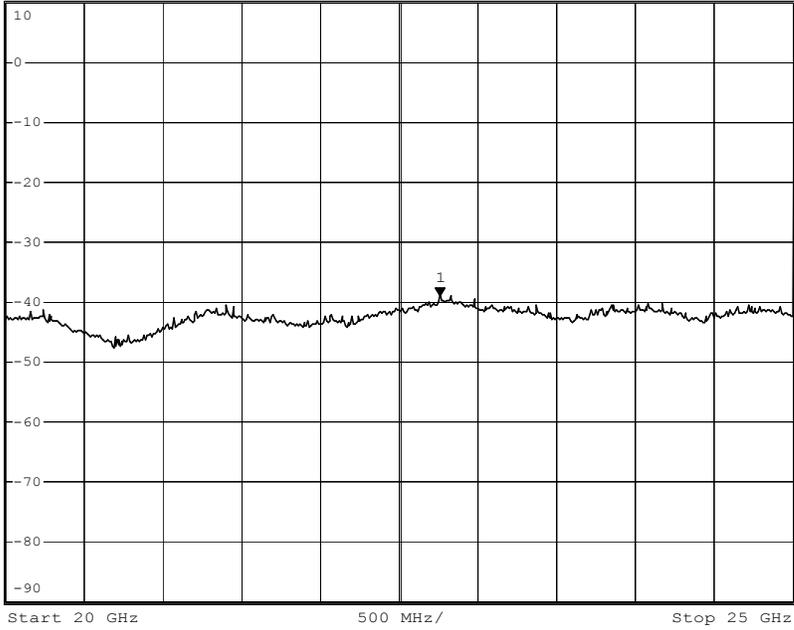

Date: 29.NOV.2004 16:24:14

Tx frequency: 2480MHz

Spurious Emissions – Radiated

Date: 16 Dec 2004

EUT: LEM Evasio Professional Wireless Headset (Base Unit)

Company: LEM Industries


Voltage supply: 110VAC to AC/DC adapter

Test by: Hugo Wan


Op. mode: TX mode, DH1 with PRBS9 payload


Tx frequency (MHz)	Polarization	Spurious Frequency (MHz)	Power Level (dBuV/m)	Detector (P/QP/A)
2402	V / H	No peak found	-	-
Tx frequency (MHz)	Polarization	Spurious Frequency (MHz)	Power Level (dBuV/m)	Detector (P/QP/A)
2441	V / H	No peak found	-	-
Tx frequency (MHz)	Polarization	Spurious Frequency (MHz)	Power Level (dBuV/m)	Detector (P/QP/A)
2480	V / H	No peak found	-	-


Import
LEM Beschäftigung
041108065
FCC
Op: 2402MHz

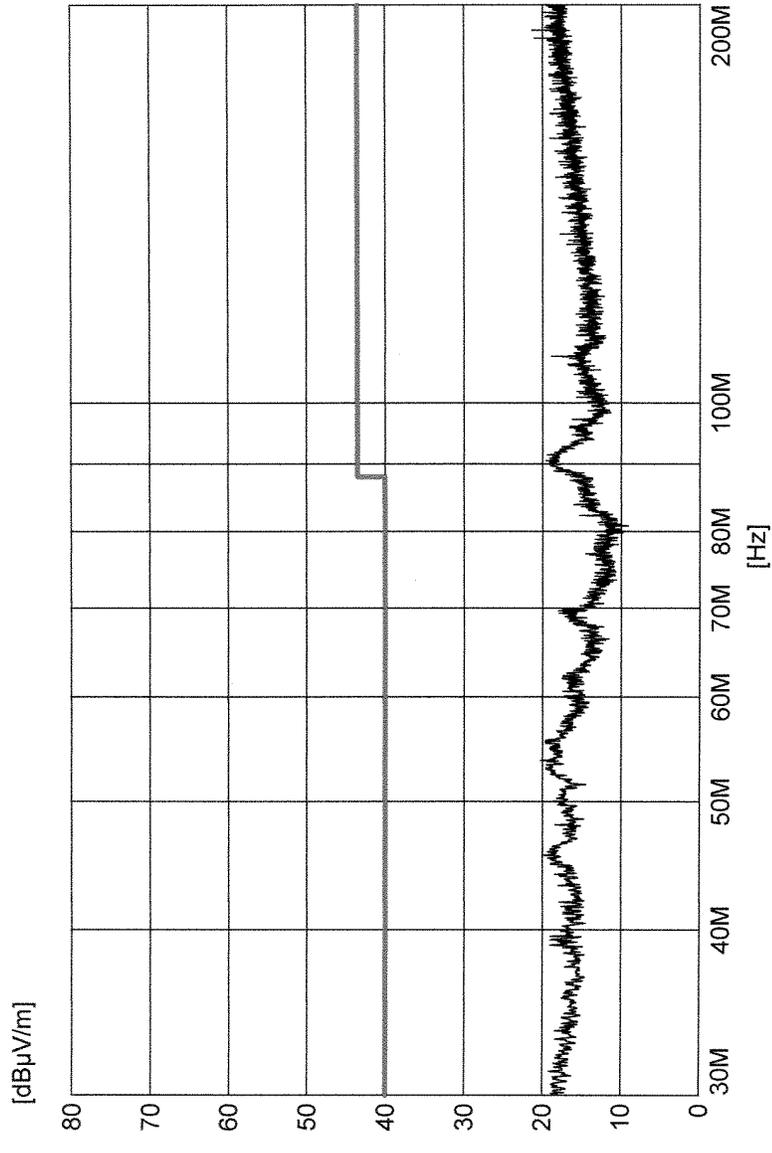


— MES 07288A07.PK
- - - LIM FCC P15.247 (USA)

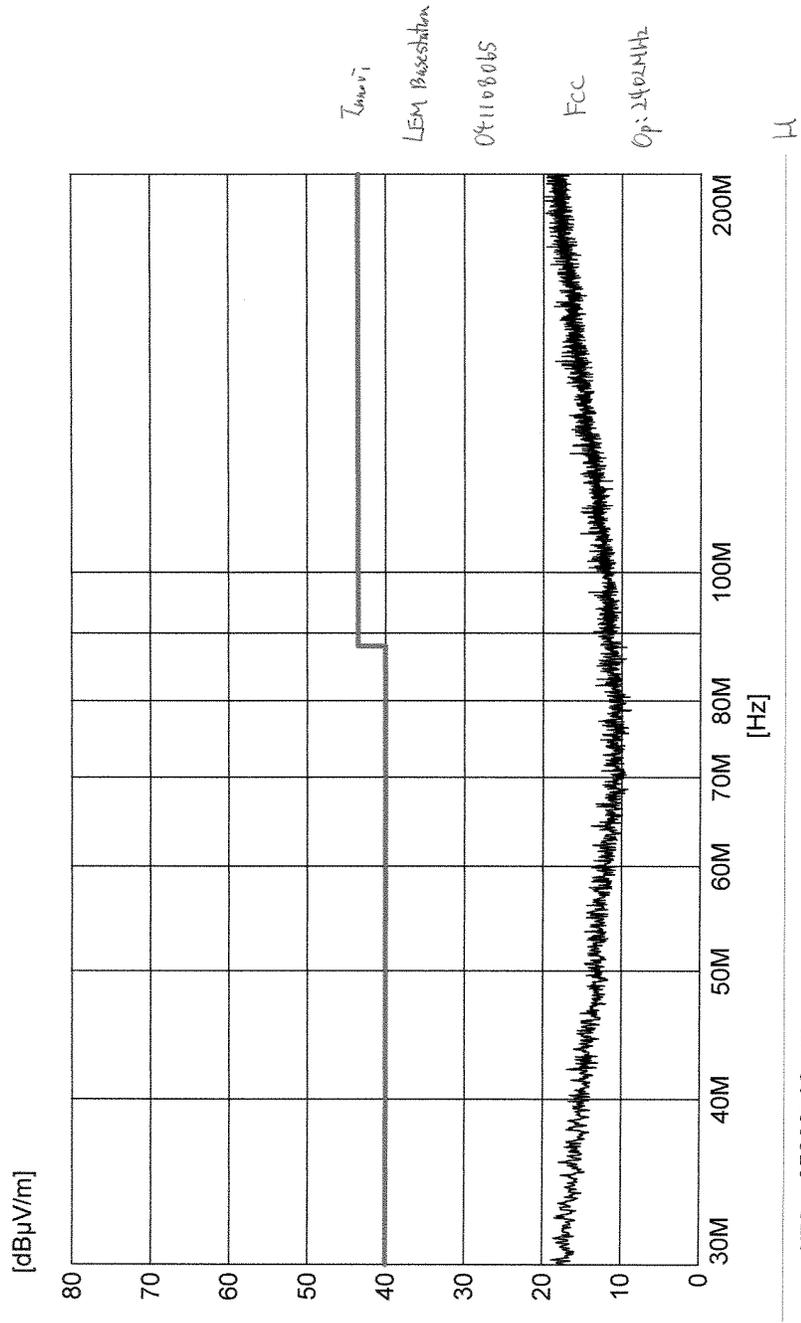

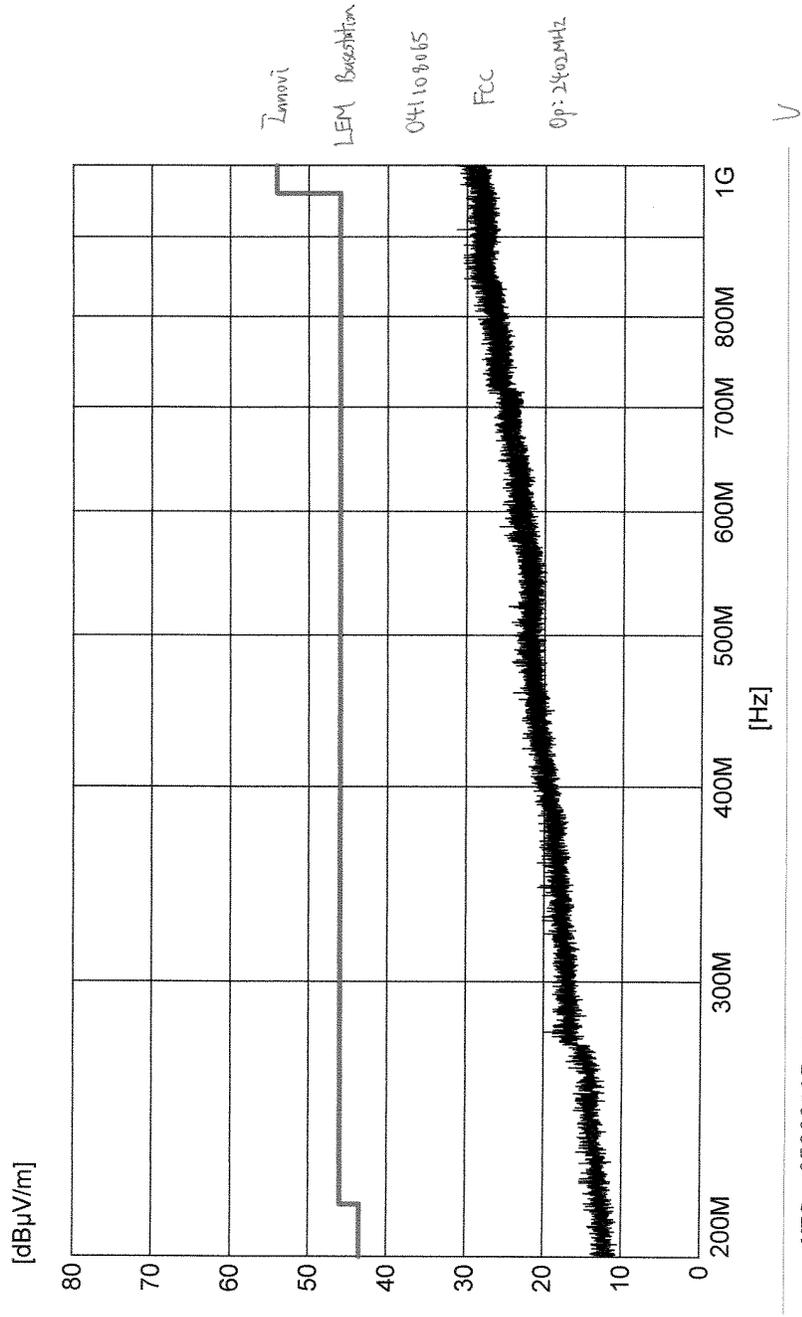

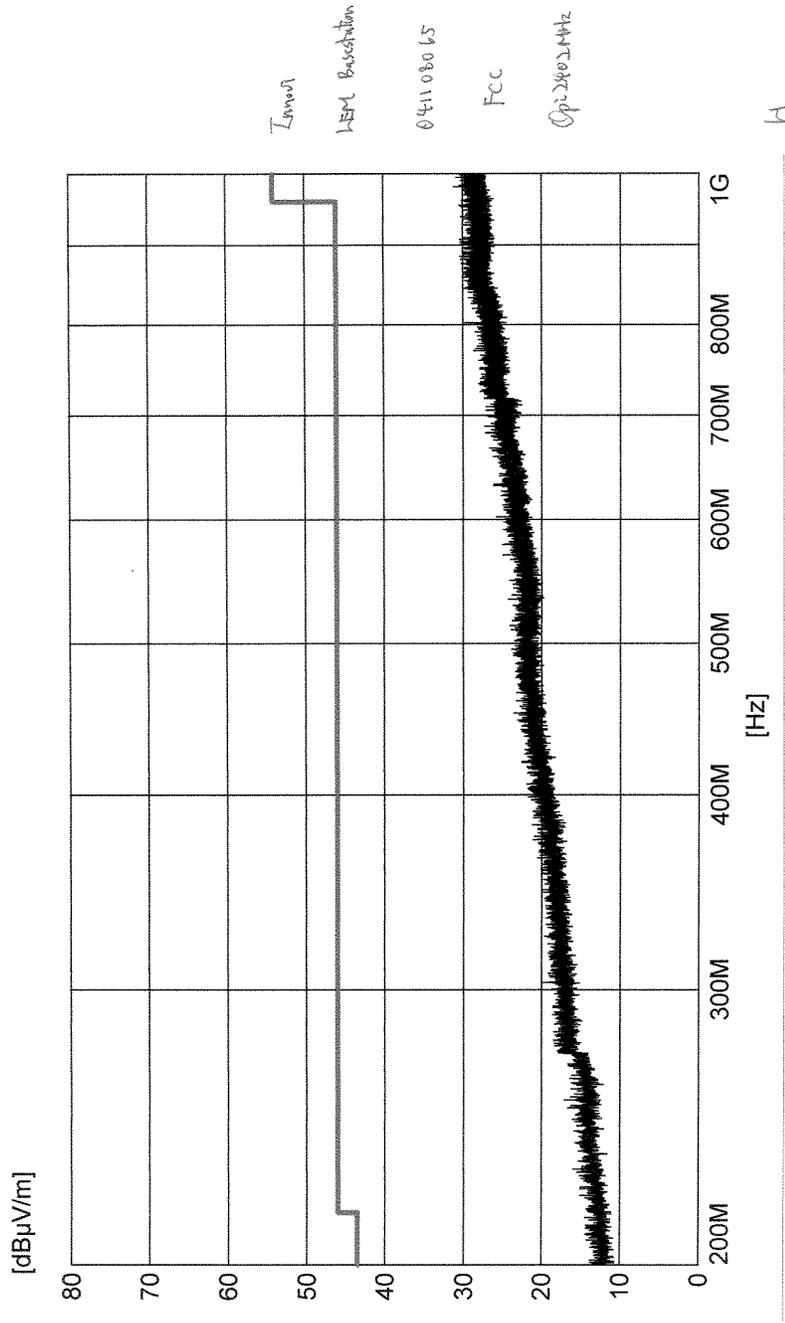

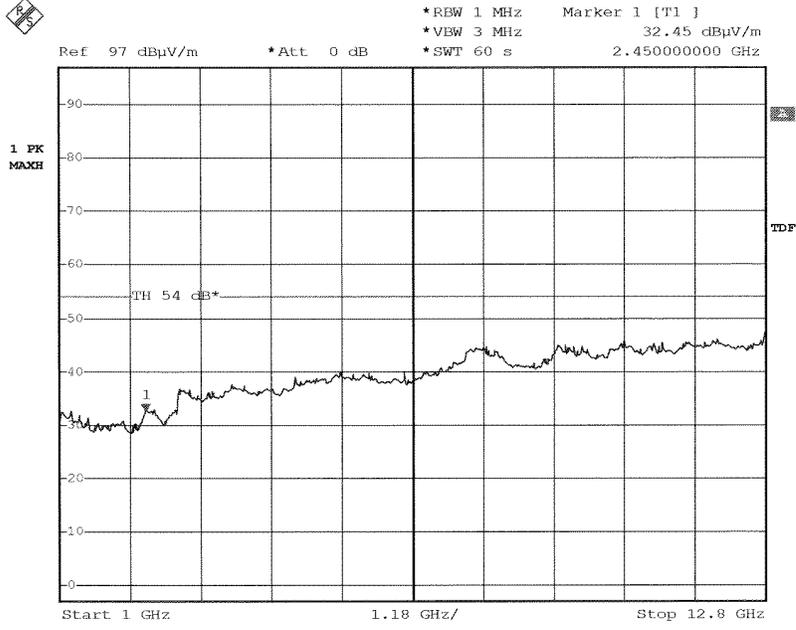

Date: 7.DEC.2004 11:24:30

Innovi


LEM Basestation

041108065

FCC


Op Mode: 2402

(2.4 GHz band stop filter applied)

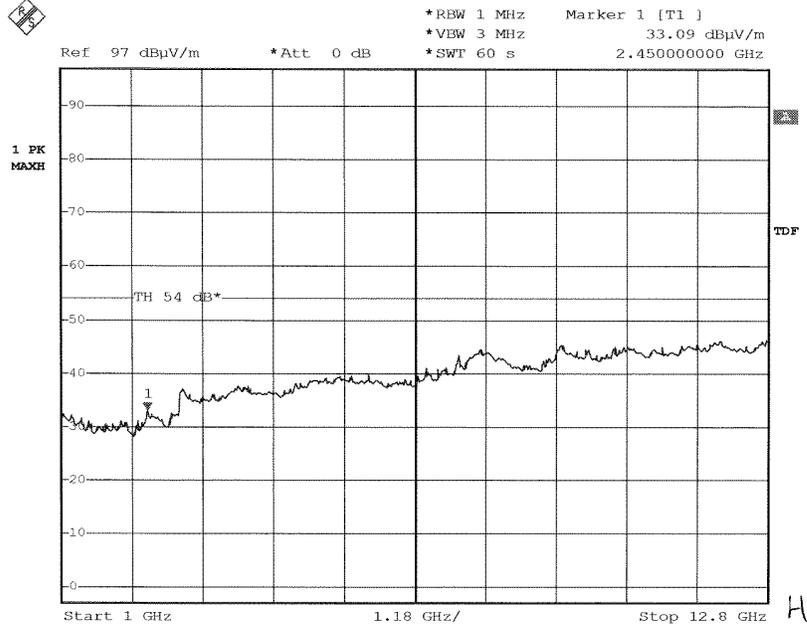


Date: 7.DEC.2004 11:27:13

Innovi
LEM Basestation
041108065
FCC
Op: 2402
(2.4 GHz band stop filter applied)

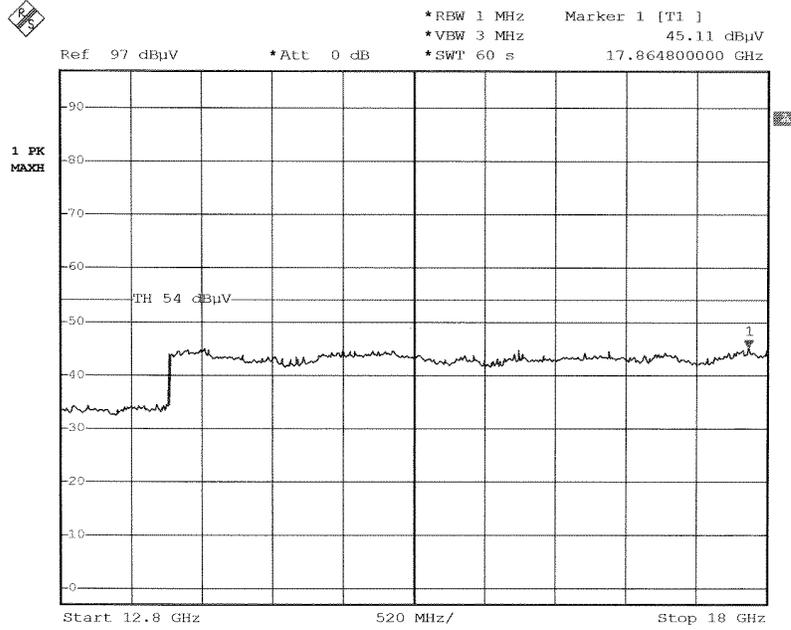

Date: 7.DEC.2004 11:54:20

Innovi
LEM Basisstation
041108065
FCC
Op: 2502

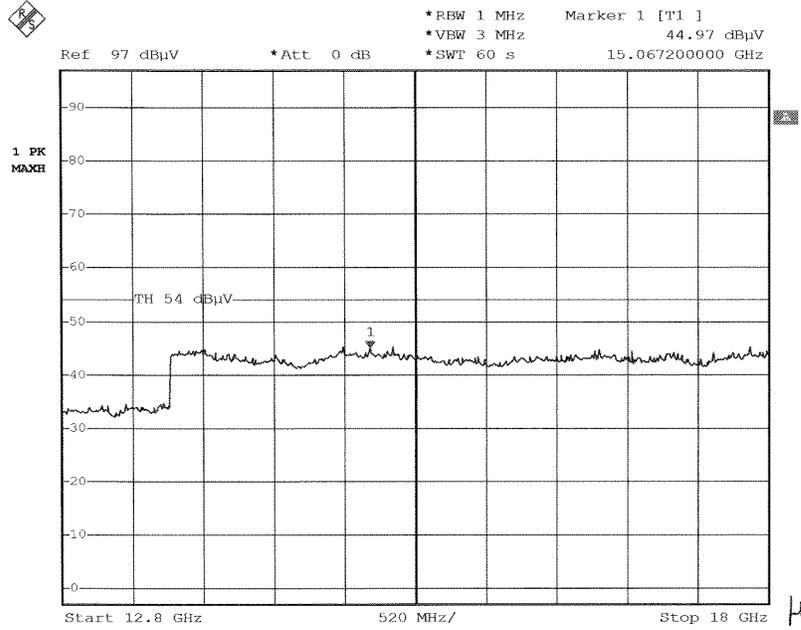

Date: 7.DEC.2004 11:47:27


Linnvi

LEM Basestation

041108065


FCC

Op: 2402

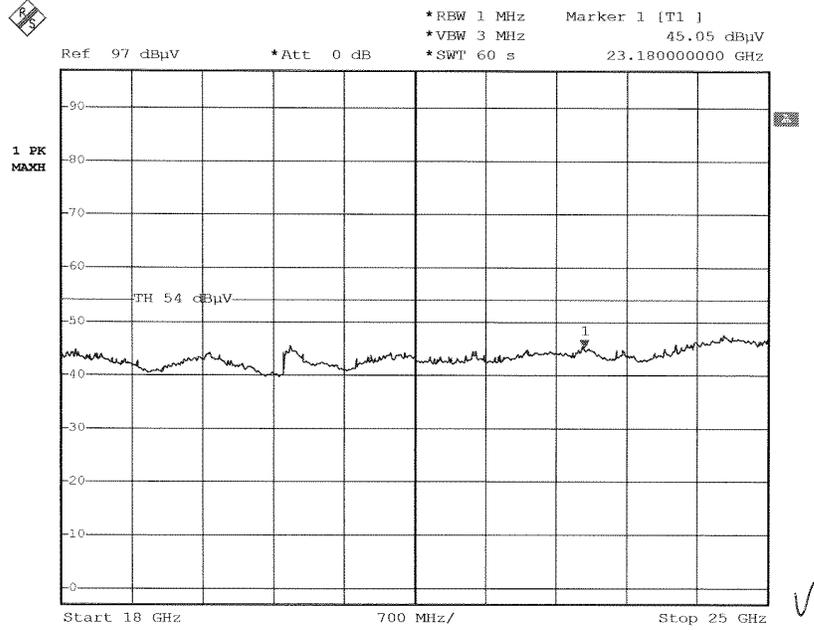

Date: 7.DEC.2004 12:08:32

Innovi
LEM Basestation
041108065
FCC
Op: 2402

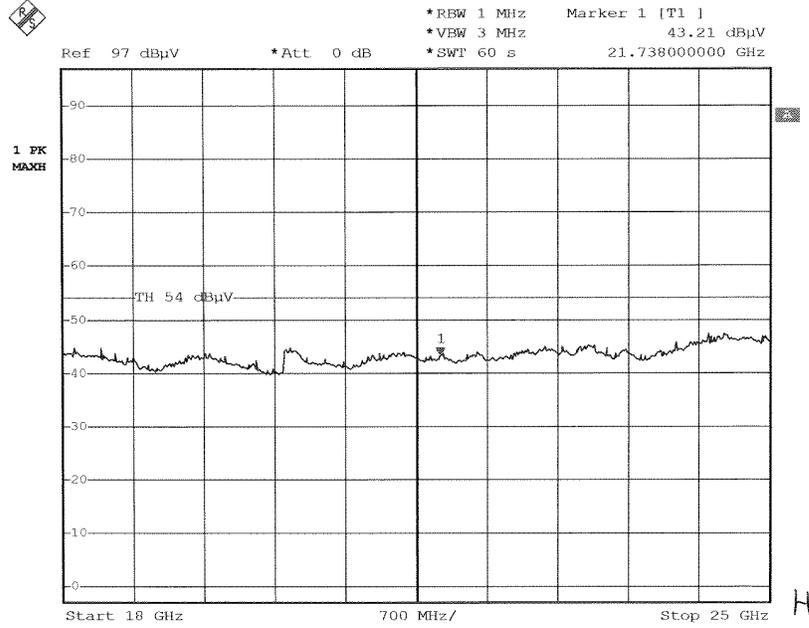

Date: 7.DEC.2004 12:12:45


Innov


LEM Basestation


041103065


FCC


Op: 2402

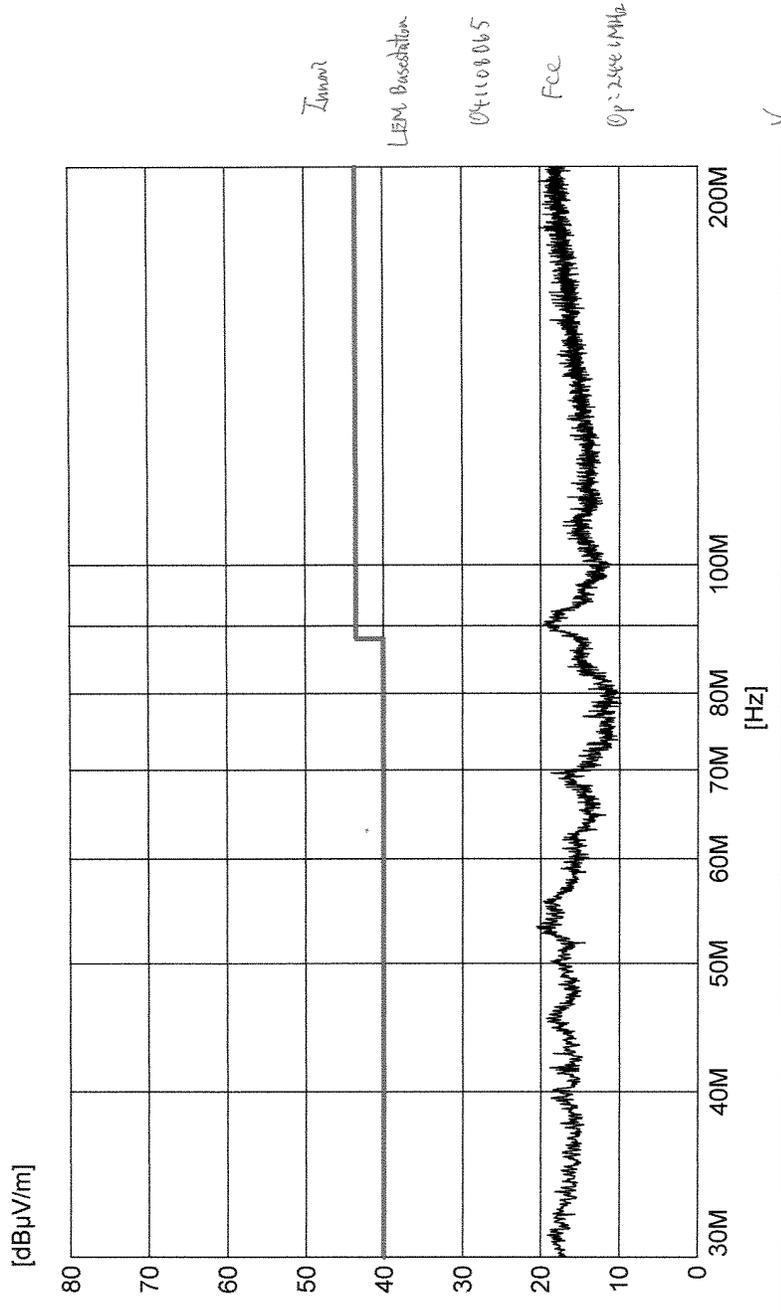

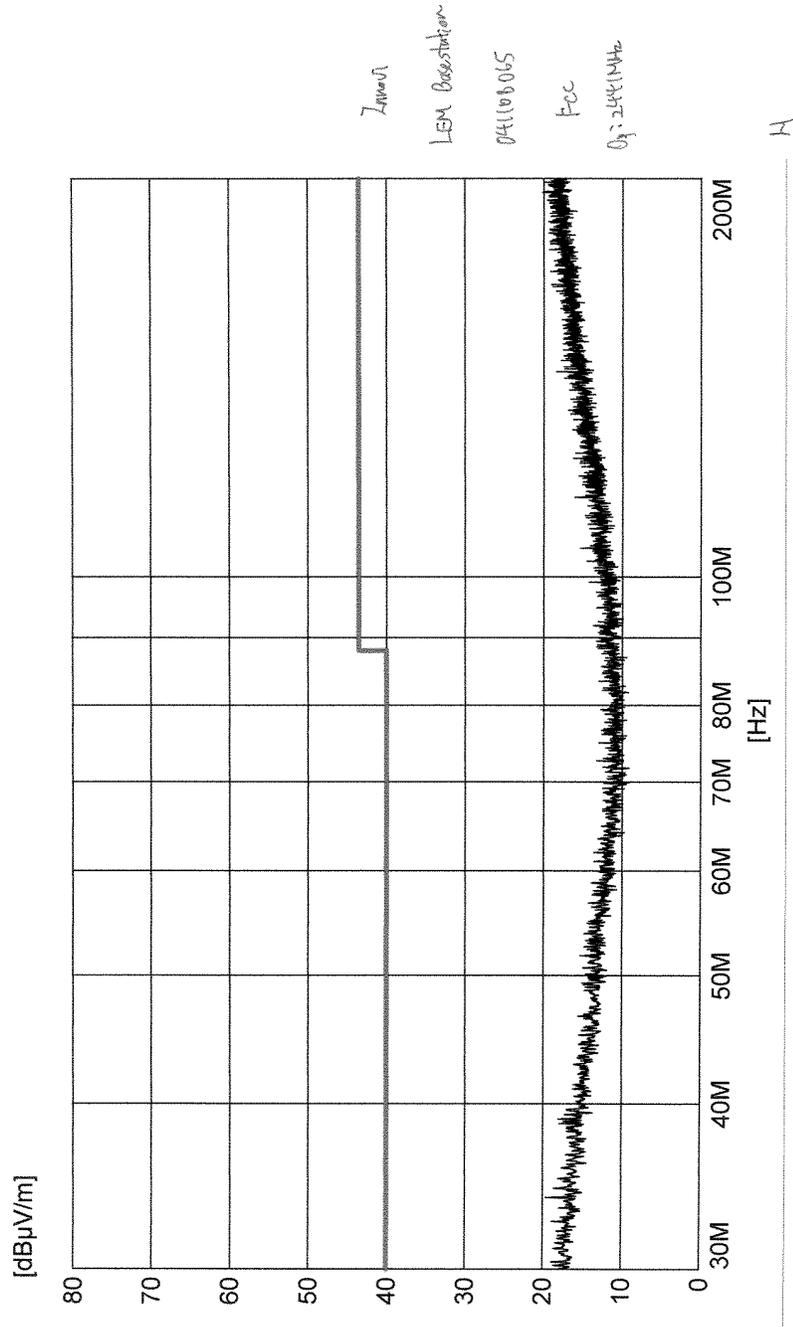

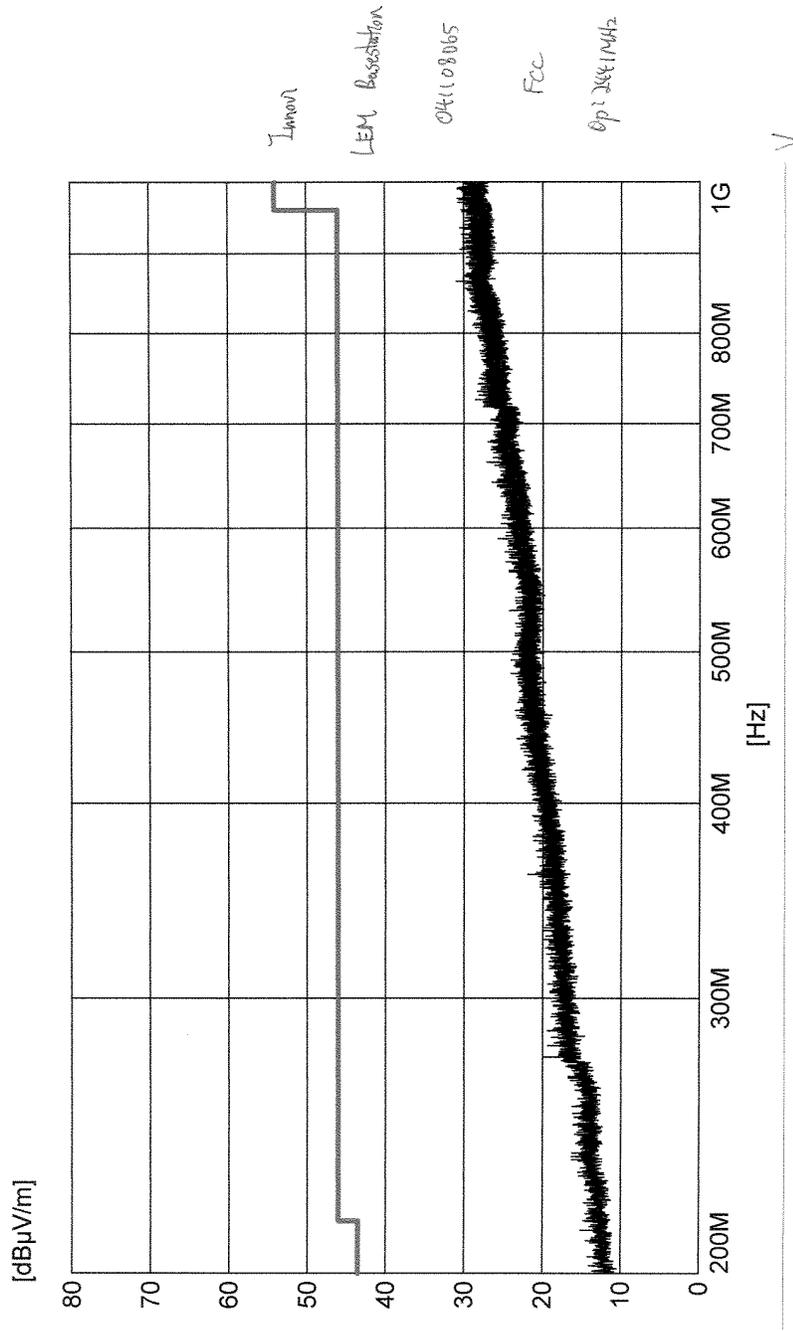

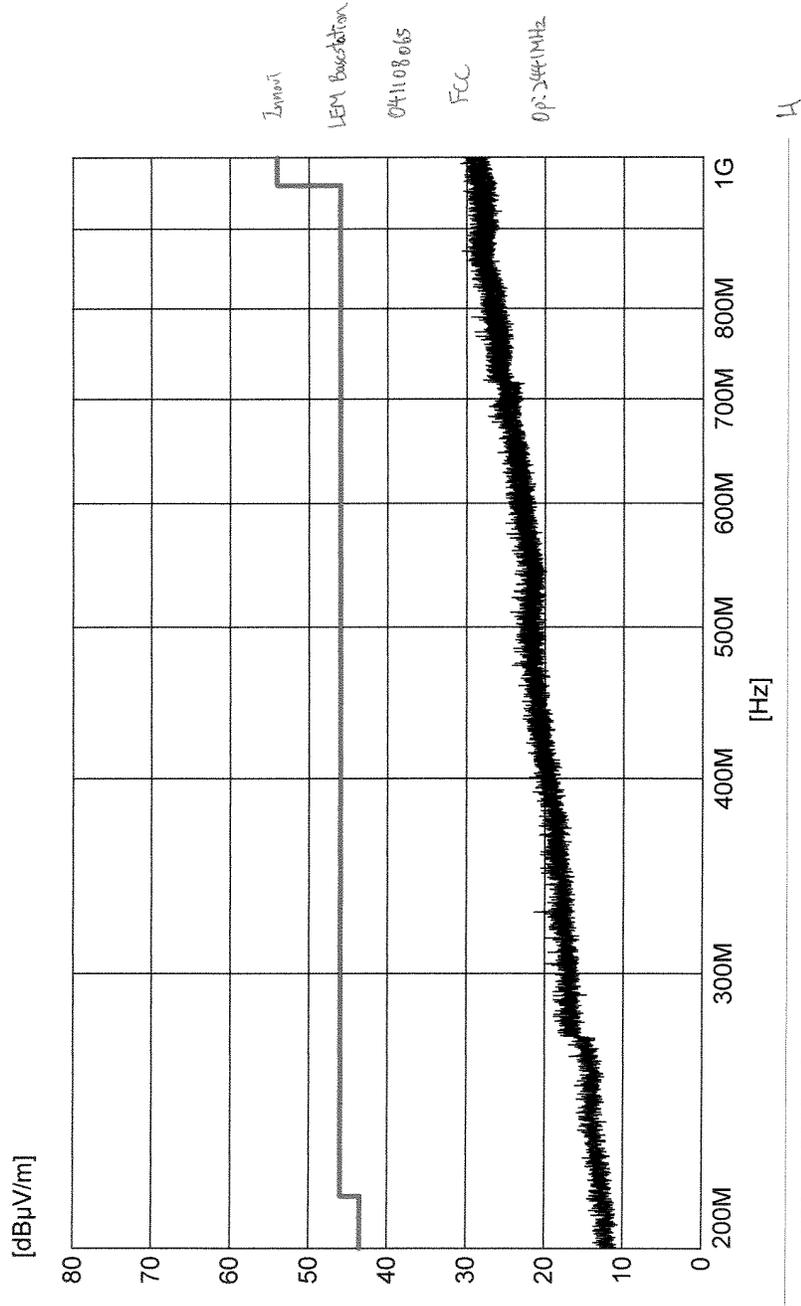

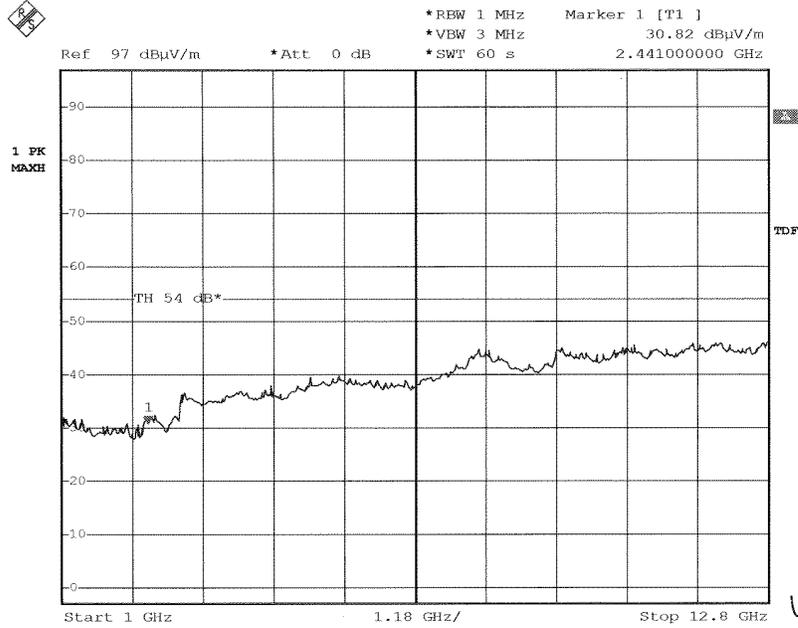

Date: 7.DEC.2004 11:33:57

Innovi


LEM Basestation

041108065

FCC


Op: 2441.

(2.4 GHz band stop filter applied)

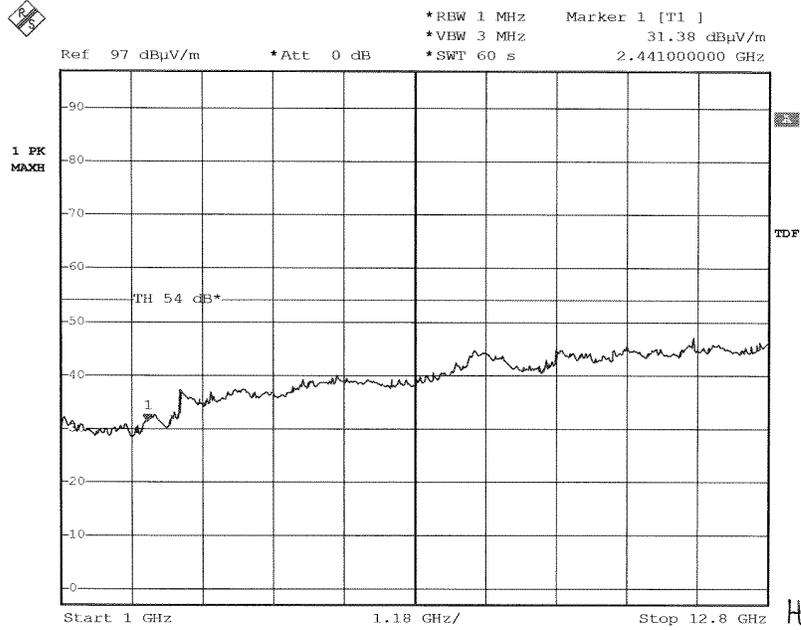


Date: 7.DEC.2004 11:31:38

Innovi
LEM Basestation
041108065
FCC
Op: 2441
(2.4GHz band stop filter applied)

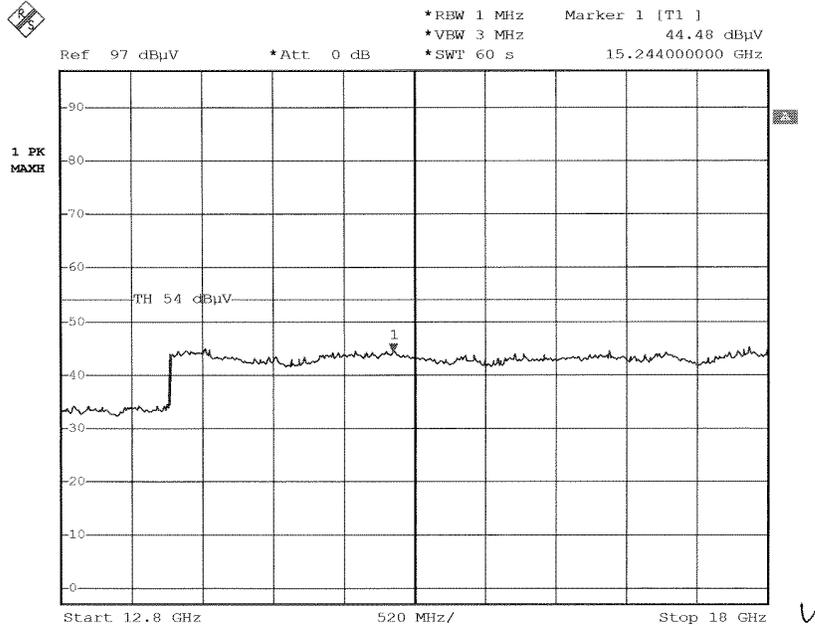

Date: 7.DEC.2004 11:53:02

Innovi
LEM Basestation
041108065
FCC
Op: 2441

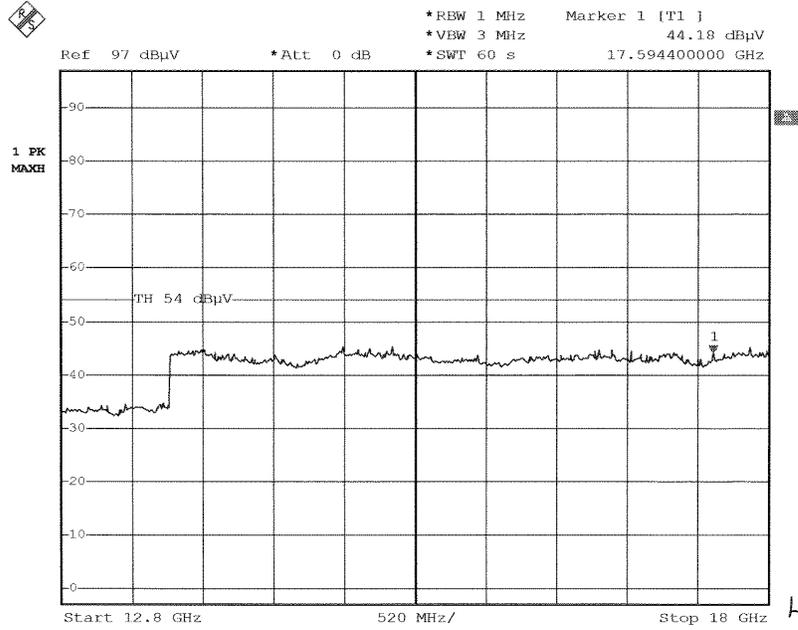

Date: 7.DEC.2004 11:48:39


Innovi

LEM Basestation

041108065


Fcc

Op= 25441.

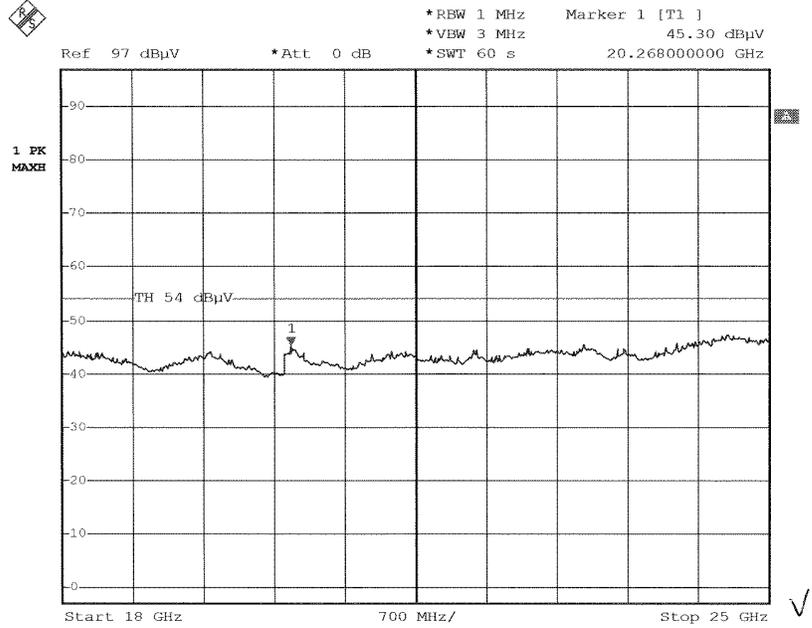


Date: 7.DEC.2004 12:07:17

Innovi
LEM Basestation
041108065
FCC
Op: 2441

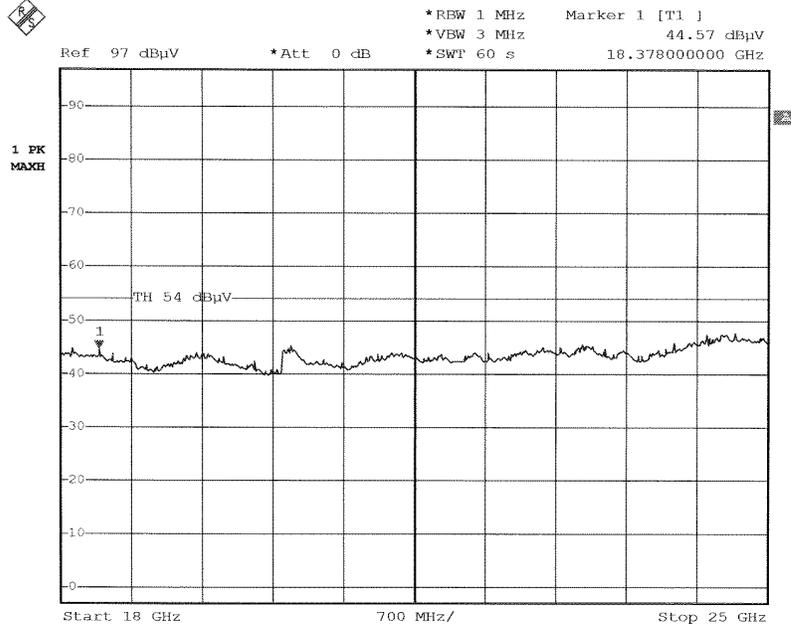



Date: 7.DEC.2004 12:14:06


Innovi
LEM Busstation
041108065
FCC
Op: 2641.

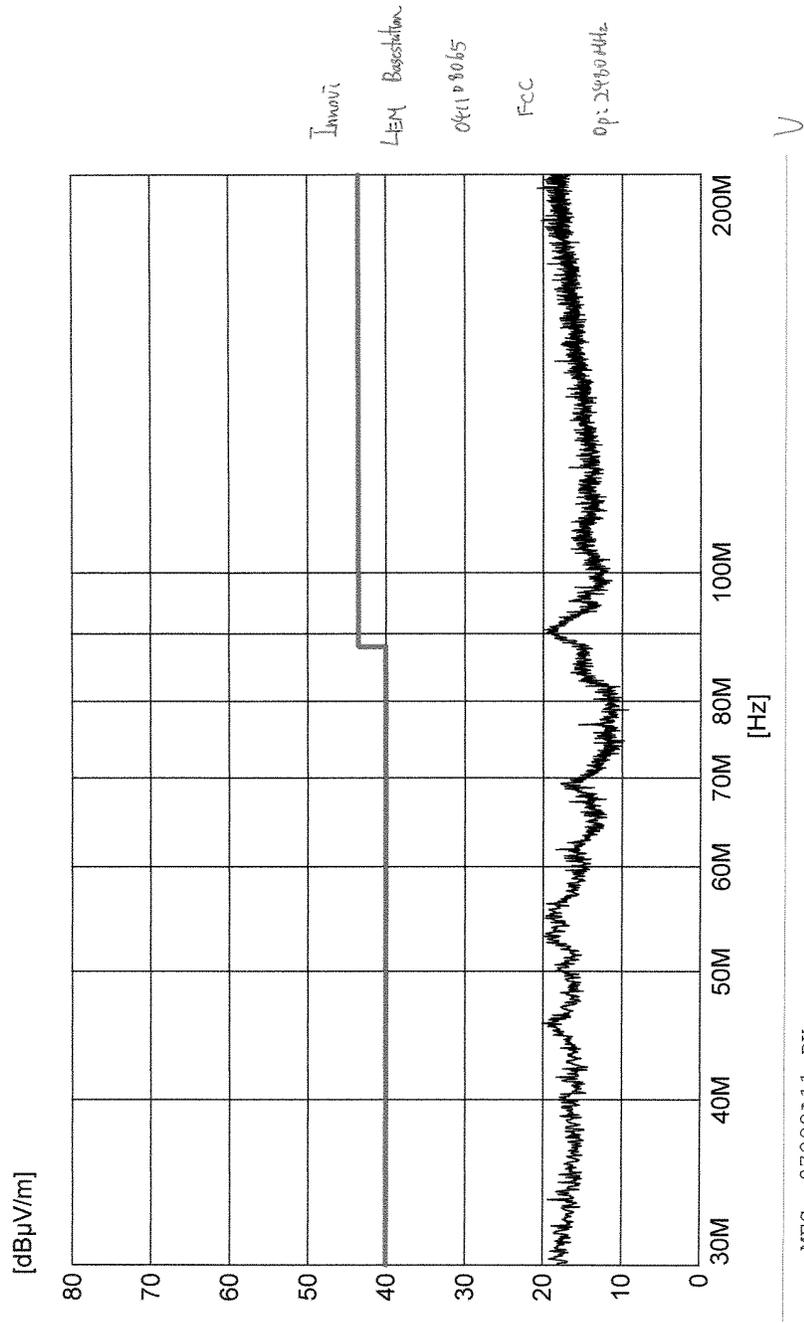


Innovi
LEM Boxstation
041108065
FCC
Op: 2480MHz
H

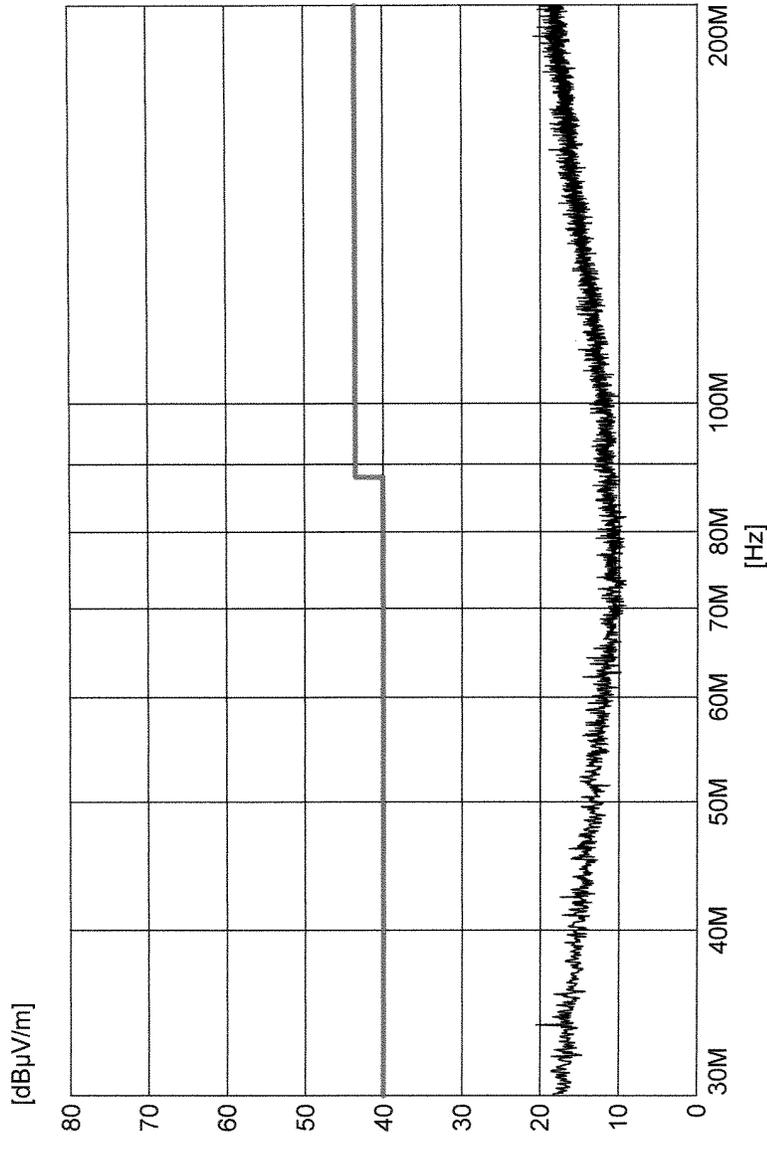

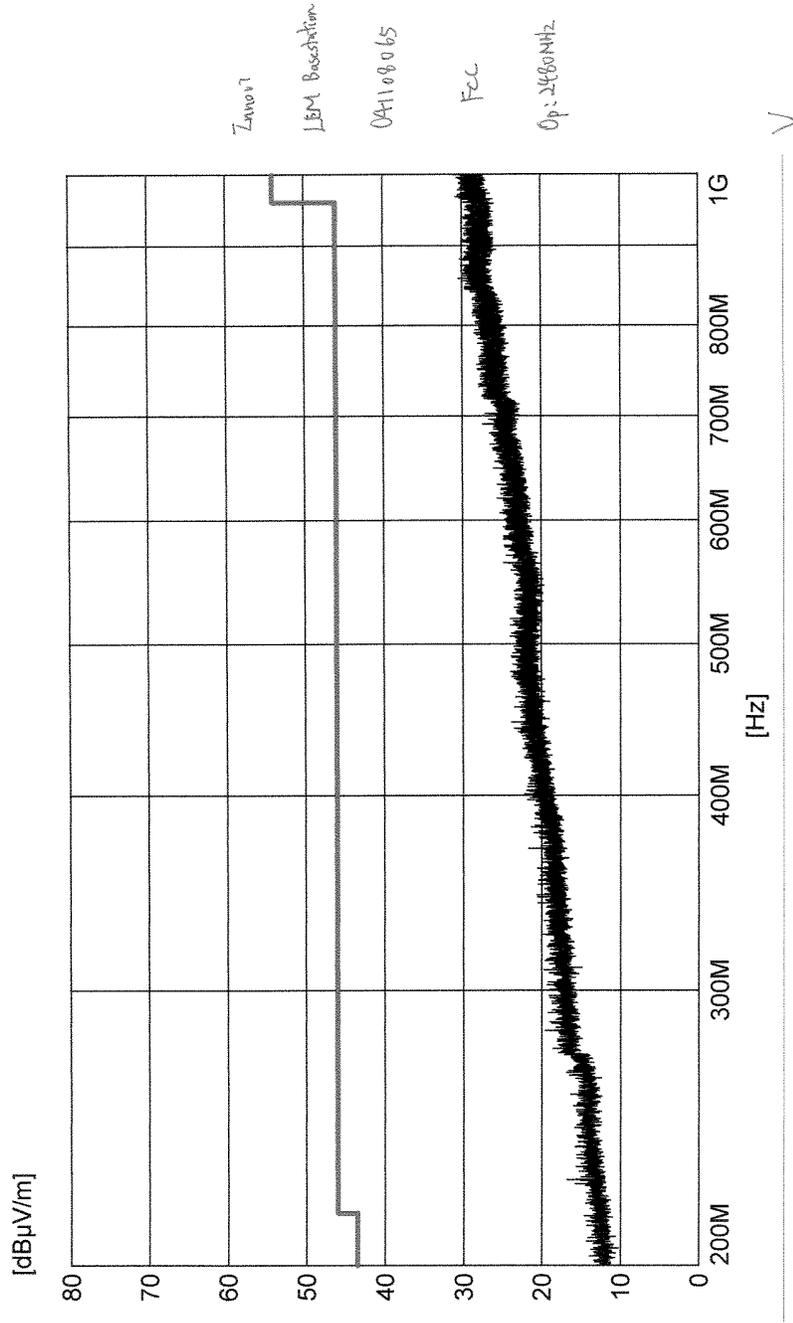

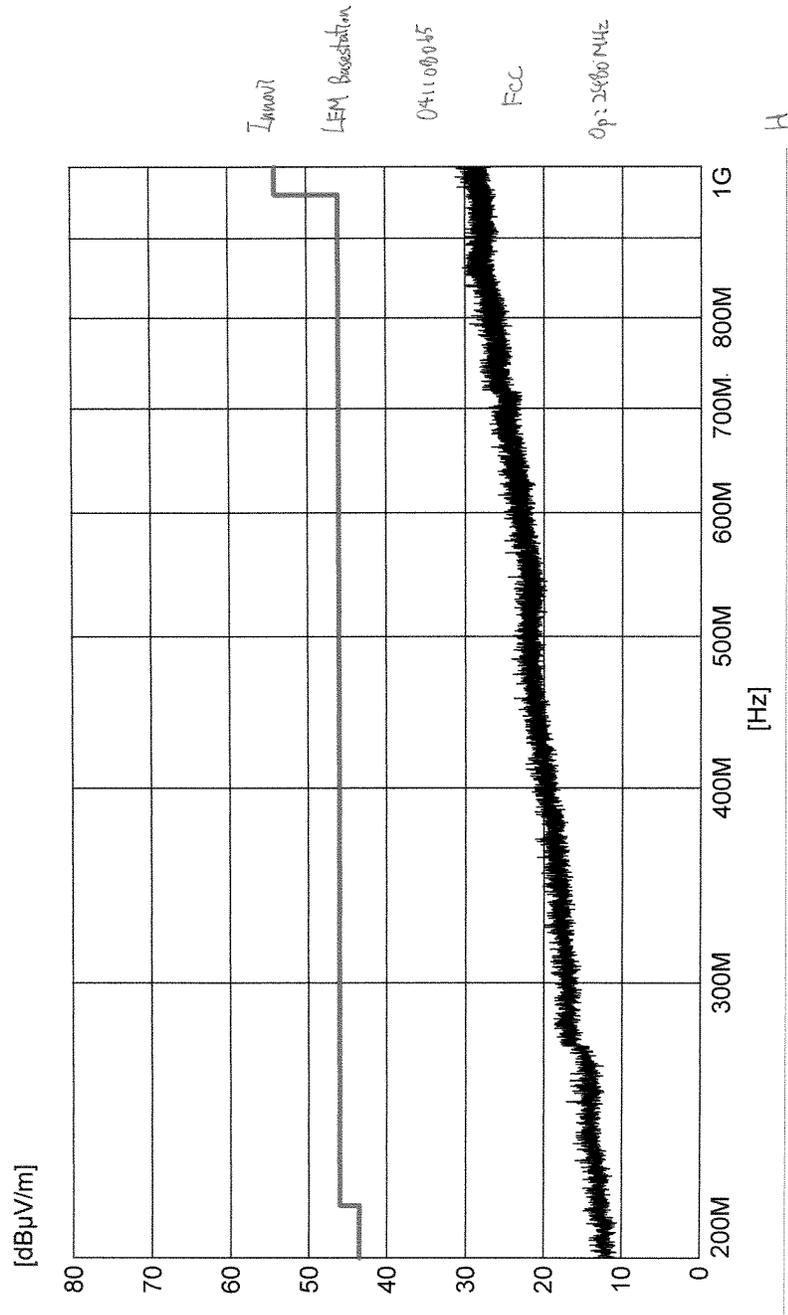


MES 07288A14.PK
LIM FCC P15.247 (USA)

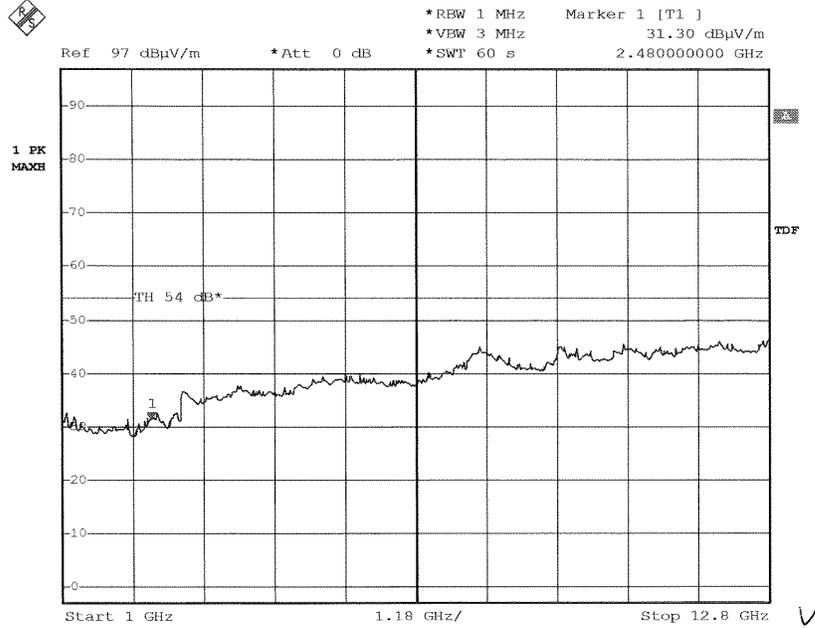


Date: 7.DEC.2004 11:40:25

Linnvi
LEM Basestation
041108065
FCC
Op: Mode: 2480
(24 GHz band stop filter applied)

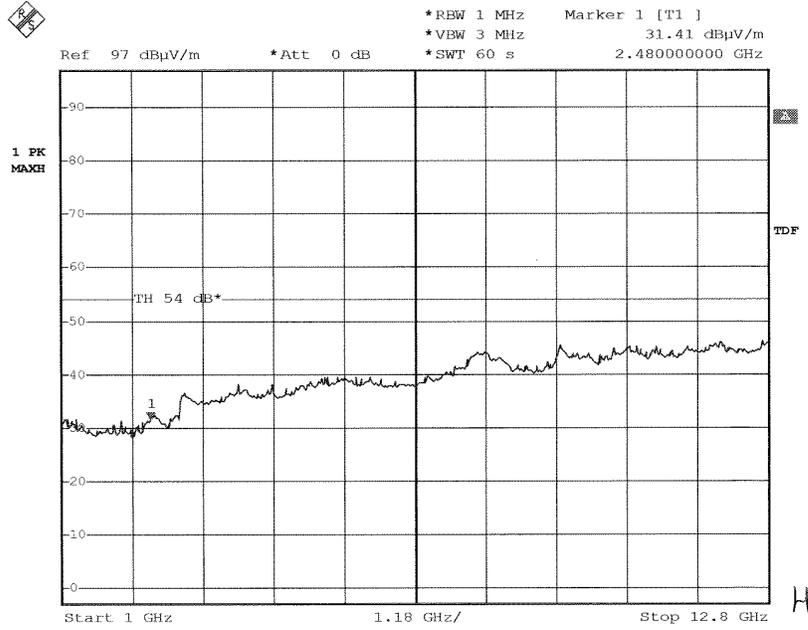


Date: 7.DEC.2004 11:42:37

Innvi
LEM Basestation
041108065
FCC
Op Mode: 2460
(2.4 GHz band stop filter applied)

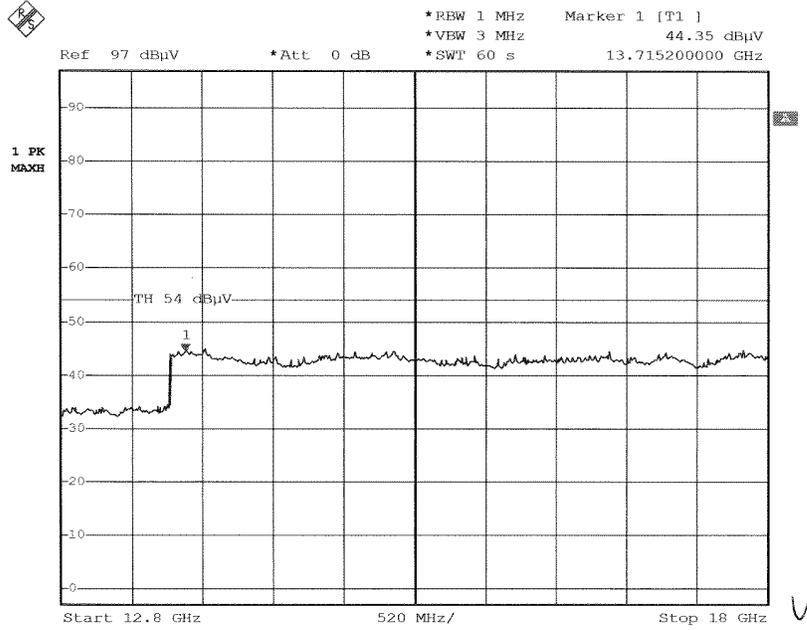


Date: 7.DEC.2004 11:51:19

Innovi
LEM Basestation
041108065
FCC
Op:2480

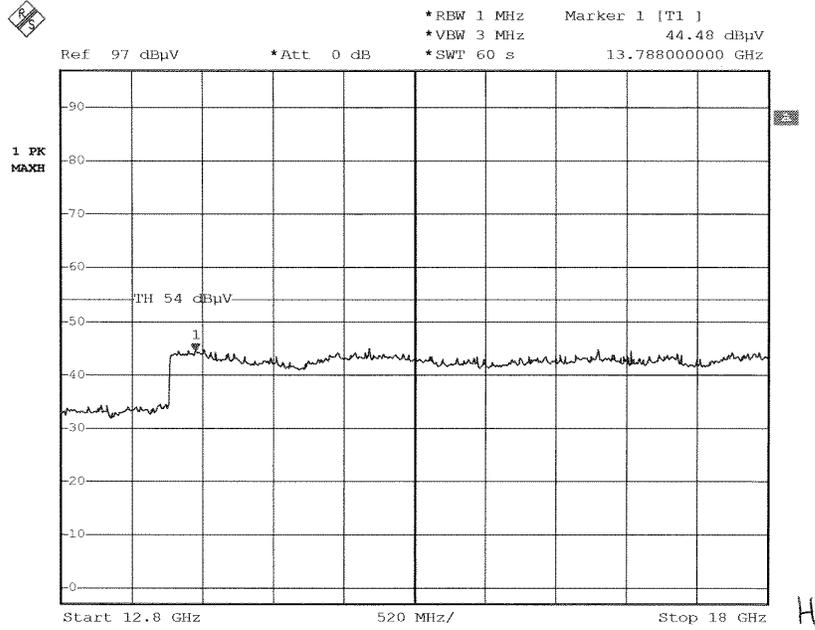


Date: 7.DEC.2004 11:46:09

Innovi
LEM Basestation
041108065
FCC
Op: 2460.

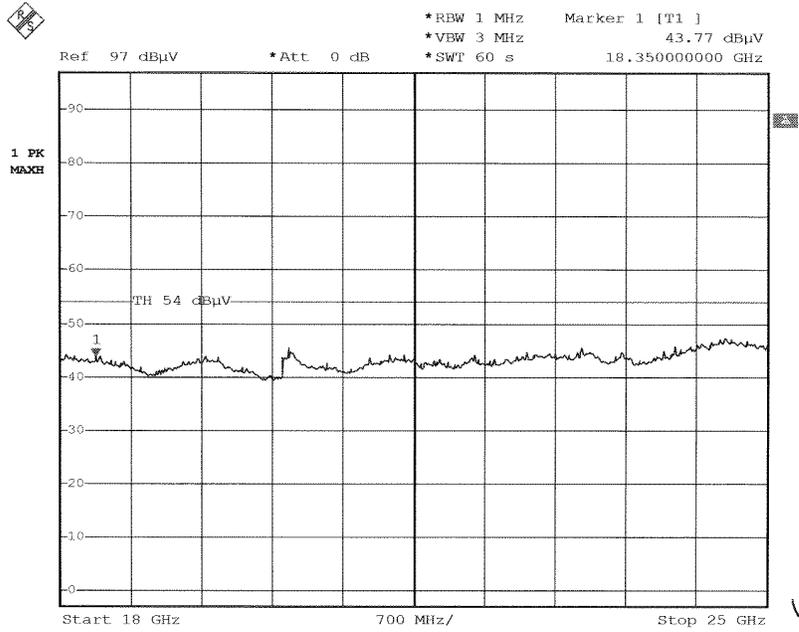

Date: 7.DEC.2004 12:06:07

Innovi
LEM Basestation
041108065
Fcc
Op: 2480

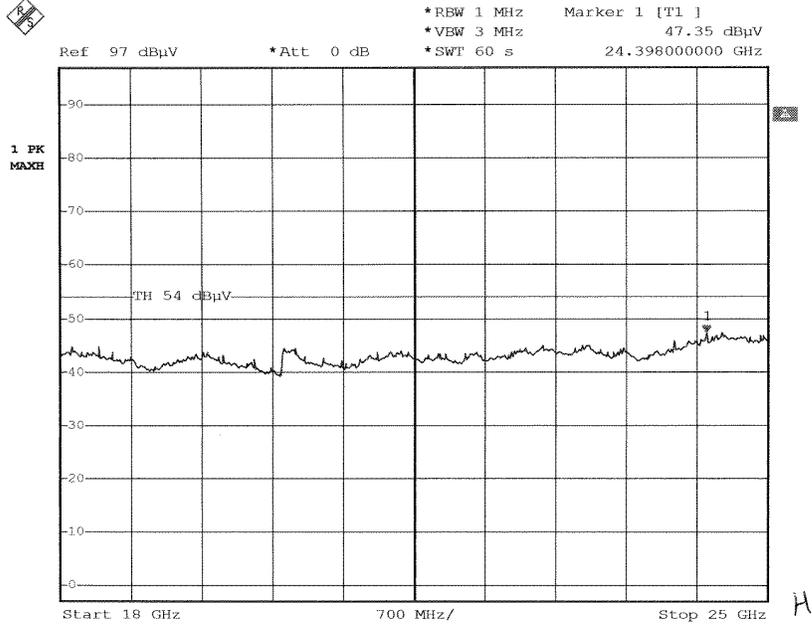

Date: 7.DEC.2004 12:11:08

Ihmo
LEM Basestation
041108065
FCC
Op:2480