



TESTING  
CERT #803.01, 803.02, 803.05, 803.06

**PACIFIC BIOSCIENCE LABORATORIES, INC.  
(CLARISONIC) TEST REPORT**

**FOR THE**  
**SONIC SKIN CARE BRUSH, PBL3061**

**FCC PART 15 SUBPART B SECTIONS 15.107 AND 15.109 CLASS B  
TESTING**

**DATE OF ISSUE: MARCH 31, 2009**

**PREPARED FOR:**

Pacific BioScience Laboratories, Inc.  
(Clarisonic)  
13222 SE 30th St.  
Bellevue, WA 98005

P.O. No.: 5978  
W.O. No.: 89332

**PREPARED BY:**

Mary Ellen Clayton  
CKC Laboratories, Inc.  
5046 Sierra Pines Drive  
Mariposa, CA 95338

Date of test: March 18, 2009

**Report No.: FC09-047**

This report contains a total of 20 pages and may be reproduced in full only. Partial reproduction may only be done with the written consent of CKC Laboratories, Inc. The results in this report apply only to the items tested, as identified herein.

## TABLE OF CONTENTS

Administrative Information .....	3
Approvals .....	3
Site File Registration Numbers .....	3
Equipment Under Test (EUT) Description .....	4
Equipment Under Test .....	4
Peripheral Devices .....	4
Summary of Results .....	5
Conditions During Testing .....	5
Measurement Uncertainties .....	6
Report of Emissions Measurements.....	6
Testing Parameters .....	6
Conducted Emissions .....	8
Radiated Emissions .....	15

## ADMINISTRATIVE INFORMATION

**DATE OF TEST:** March 18, 2009

**DATE OF RECEIPT:** March 18, 2009

**REPRESENTATIVE:** Ryan Rutledge

**MANUFACTURER:**

Pacific BioScience Laboratories, Inc.  
(Clarisonic)  
13222 SE 30th St.  
Bellevue, WA 98005

**TEST LOCATION:**

CKC Laboratories, Inc.  
22116 23rd Drive S.E., Suite A  
Bothell, WA 98021-4413

**TEST METHOD\*:** ANSI C63.4 (2003)

**PURPOSE OF TEST:** To perform the testing of the Sonic Skin Care Brush, PBL3061 with the requirements for FCC Part 15 Subpart B Sections 15.107 and 15.109 Class B devices.

## APPROVALS

**QUALITY ASSURANCE:**



---

Steve Behm, Director of Engineering Services

**TEST PERSONNEL:**



---

Amrinder Brar, EMC Engineer/Lab Manager

## SITE FILE REGISTRATION NUMBERS

Location	Japan	Canada	FCC
Bothell	R-2296, C-2506 & T-1489	3082C-1	318736

## **EQUIPMENT UNDER TEST (EUT) DESCRIPTION**

The customer declares the EUT tested by CKC Laboratories was representative of a production unit.

**The Mia Skin Care System Model RBMK3B consists of the following devices:**

Function	Manufacturer	Model #
Sonic Skin Care Brush	Pacific BioScience Laboratories, Inc.	PBL3061
AC/DC Adapter	Pacific BioScience Laboratories, Inc.	PBL3100-479
Charger Base	Pacific BioScience Laboratories, Inc.	PBL4110

The following model was tested by CKC Laboratories: **Sonic Skin Care Brush, MIA**

Since the time of testing the manufacturer has chosen to use the following model name in its place. Any differences between the names does not affect their EMC characteristics and therefore meets the level of testing equivalent to the tested model name shown on the data sheets:

**Sonic Skin Care Brush, PBL3061**

## **EQUIPMENT UNDER TEST**

### **Sonic Skin Care Brush**

Manuf: Pacific BioScience Laboratories, Inc.  
 Model: PBL3061  
 Serial: EMC2

## **PERIPHERAL DEVICES**

The EUT was tested with the following peripheral devices:

### **AC/DC Adapter**

Manuf: Pacific BioScience Laboratories, Inc.  
 Model: PBL3100-479  
 Serial: AD64

### **Charger Base**

Manuf: Pacific BioScience Laboratories, Inc.  
 Model: PBL4110  
 Serial: 74

**Note:** At the time of testing Clarisonic was noted as the manufacturer name. Clarisonic is a brand name of Pacific BioScience Laboratories, Inc., who is the actual manufacturer.

## SUMMARY OF RESULTS

Test	Specification	Results
Mains Conducted Emissions	FCC Part 15 Subpart B Section 15.107 Class B	Pass
Radiated Emissions	FCC Part 15 Subpart B Section 15.109 Class B	Pass

## CONDITIONS DURING TESTING

No modifications to the EUT were necessary during testing.

## MEASUREMENT UNCERTAINTIES

Uncertainty Value	Parameter
4.73 dB	Radiated Emissions
3.34 dB	Mains Conducted Emissions
3.30 dB	Disturbance Power

The reported measurement uncertainties are calculated based on the worst case of all laboratory environments from CKC Laboratories, Inc. test sites. Only those parameters which require estimation of measurement uncertainty are reported. The reported worst case measurement uncertainty is less than the maximum values derived in CISPR 16-4-2. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ . Compliance is deemed to occur provided measurements are below the specified limits.

## REPORT OF EMISSIONS MEASUREMENTS

### TESTING PARAMETERS

The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. Cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was taken with a spectrum analyzer or receiver. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the table below. The corrected data was then compared to the applicable emission limits. Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

### CORRECTION FACTORS

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in  $\text{dB}\mu\text{V}/\text{m}$ , the spectrum analyzer reading in  $\text{dB}\mu\text{V}$  was corrected by using the following formula. This reading was then compared to the applicable specification limit.

<b>SAMPLE CALCULATIONS</b>	
Meter reading	(dB $\mu$ V)
+	Antenna Factor (dB)
+	Cable Loss (dB)
-	Distance Correction (dB)
-	Preamplifier Gain (dB)
=	Corrected Reading (dB $\mu$ V/m)

## TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. The following table shows the measuring equipment bandwidth settings that were used in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used. When conducted emissions testing was performed, a 10 dB external attenuator was used with internal offset correction in the analyzer.

<b>MEASURING EQUIPMENT BANDWIDTH SETTINGS PER FREQUENCY RANGE</b>			
TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING
CONDUCTED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz
RADIATED EMISSIONS	1000 MHz	>1 GHz	1 MHz

## SPECTRUM ANALYZER/RECEIVER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in the emissions tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "Peak" mode. Whenever a "Quasi-Peak" or "Average" reading is listed as one of the highest readings, this is indicated as a "QP" or an "Ave" on the appropriate rows of the data sheets. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

### Peak

In this mode, the spectrum analyzer/receiver readings recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature of the measuring device called "peak hold," the measuring device had the ability to measure transients or low duty cycle transient emission peak levels. In this mode the measuring device made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

### Quasi-Peak

When the true peak values exceeded or were within 2 dB of the specification limit, quasi-peak measurements were taken using the quasi-peak detector.

### Average

For certain frequencies, average measurements may be made using the spectrum analyzer/receiver. To make these measurements, the test engineer reduces the video bandwidth on the measuring device until the modulation of the signal is filtered out. At this point the measuring device is set into the linear mode and the scan time is reduced.

## CONDUCTED EMISSIONS

### Test Setup Photos



## Test Data Sheets

Test Location: CKC Laboratories • 22116 23rd Dr SE • Bothell, WA 98021-4413 • 425-402-1717

Customer: **Pacific BioScience Laboratories, Inc. (Clarisonic)**  
 Specification: **FCC 15.107 Class B - AVE**  
 Work Order #: **89332** Date: **3/18/2009**  
 Test Type: **Conducted Emissions** Time: **3:16:43 PM**  
 Equipment: **Sonic Skin Care Brush** Sequence#: **26**  
 Manufacturer: Clarisonic Tested By: **A. Brar**  
 Model: **MIA** **120V 60Hz**  
 S/N: **EMC2**

### ***Test Equipment:***

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4440A	MY46186330	01/31/2008	01/31/2010	AN02872
Cable 30'	11	11/05/2008	11/05/2010	ANP05366
Cable 6'	49	11/10/2008	11/10/2010	ANP05371
Cable 20'	16	11/10/2008	11/10/2010	ANP05360
Attenuator	9912	03/21/2008	03/21/2010	ANP05503
EMCO LISN	9606-1049	06/01/2007	06/01/2009	AN01492

### ***Equipment Under Test (\* = EUT):***

Function	Manufacturer	Model #	S/N
Sonic Skin Care Brush*	Clarisonic	MIA	EMC2

### ***Support Devices:***

Function	Manufacturer	Model #	S/N
AC/DC Adapter	Clarisonic	PBL3100-479	AD64
Charger Base	Clarisonic	PBL4110	74

### ***Test Conditions / Notes:***

FCC Part 15B  
 EUT is in upright position and it is being charged. This EUT is fully discharged.


### ***Transducer Legend:***

T1=CAB-ANP05371	T2=CAB-ANP05366
T3=ATT-ANP5503-032108	T4=CAB-ANP05360
T5=CDN-AN01492-060107 - Line	

Measurement Data:			Reading listed by margin.				Test Lead: Black				
#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
	MHz	dB $\mu$ V	dB	dB	dB	dB	Table	dB $\mu$ V	dB $\mu$ V	dB	Ant
1	545.600k	31.2	+0.1	+0.0	+10.1	+0.1	+0.0	41.6	46.0	-4.4	Black
			+0.1								
2	788.487k	30.3	+0.0	+0.1	+10.1	+0.1	+0.0	40.7	46.0	-5.3	Black
			+0.1								
3	725.947k	29.8	+0.0	+0.1	+10.1	+0.1	+0.0	40.2	46.0	-5.8	Black
			+0.1								
4	846.663k	29.8	+0.0	+0.1	+10.1	+0.1	+0.0	40.2	46.0	-5.8	Black
			+0.1								
5	664.862k	29.4	+0.1	+0.0	+10.1	+0.1	+0.0	39.8	46.0	-6.2	Black
			+0.1								

6	606.685k	29.3	+0.1 +0.1	+0.0	+10.1	+0.1	+0.0	39.7	46.0	-6.3	Black
7	784.124k	29.2	+0.0 +0.1	+0.1	+10.1	+0.1	+0.0	39.6	46.0	-6.4	Black
8	849.572k	29.1	+0.0 +0.1	+0.1	+10.1	+0.1	+0.0	39.5	46.0	-6.5	Black
9	603.049k	28.9	+0.1 +0.1	+0.0	+10.1	+0.1	+0.0	39.3	46.0	-6.7	Black
10	424.884k	29.8	+0.1 +0.1	+0.0	+10.1	+0.1	+0.0	40.2	47.4	-7.2	Black
11	844.482k	28.0	+0.0 +0.1	+0.1	+10.1	+0.1	+0.0	38.4	46.0	-7.6	Black
12	1.575M	27.9	+0.1 +0.1	+0.1	+10.1	+0.1	+0.0	38.4	46.0	-7.6	Black
13	1.392M	27.9	+0.0 +0.1	+0.1	+10.1	+0.1	+0.0	38.3	46.0	-7.7	Black
14	819.757k	27.8	+0.0 +0.1	+0.1	+10.1	+0.1	+0.0	38.2	46.0	-7.8	Black
15	791.396k	27.5	+0.0 +0.1	+0.1	+10.1	+0.1	+0.0	37.9	46.0	-8.1	Black
16	2.119M	27.3	+0.1 +0.1	+0.1	+10.1	+0.1	+0.0	37.8	46.0	-8.2	Black
17	1.515M	27.2	+0.1 +0.1	+0.1	+10.1	+0.1	+0.0	37.7	46.0	-8.3	Black
18	428.520k	28.4	+0.1 +0.1	+0.0	+10.1	+0.1	+0.0	38.8	47.3	-8.5	Black
19	363.071k	29.6	+0.1 +0.1	+0.0	+10.1	+0.1	+0.0	40.0	48.7	-8.7	Black
20	487.424k	27.1	+0.1 +0.1	+0.0	+10.1	+0.1	+0.0	37.5	46.2	-8.7	Black
21	733.946k	26.9	+0.0 +0.1	+0.1	+10.1	+0.1	+0.0	37.3	46.0	-8.7	Black
22	483.060k	27.1	+0.1 +0.1	+0.0	+10.1	+0.1	+0.0	37.5	46.3	-8.8	Black
23	2.242M	26.7	+0.1 +0.1	+0.1	+10.1	+0.1	+0.0	37.2	46.0	-8.8	Black
24	852.481k	26.8	+0.0 +0.1	+0.1	+10.1	+0.1	+0.0	37.2	46.0	-8.8	Black
25	966.512k	26.8	+0.0 +0.1	+0.1	+10.1	+0.1	+0.0	37.2	46.0	-8.8	Black
26	1.553M	26.6	+0.1 +0.1	+0.1	+10.1	+0.1	+0.0	37.1	46.0	-8.9	Black
27	1.336M	26.6	+0.0 +0.1	+0.1	+10.1	+0.1	+0.0	37.0	46.0	-9.0	Black
28	368.162k	29.0	+0.1 +0.1	+0.0	+10.1	+0.1	+0.0	39.4	48.5	-9.1	Black
29	1.026M	26.4	+0.0 +0.1	+0.1	+10.1	+0.1	+0.0	36.8	46.0	-9.2	Black
30	613.230k	26.2	+0.1 +0.1	+0.0	+10.1	+0.1	+0.0	36.6	46.0	-9.4	Black

CKC Laboratories Date: 3/18/2009 Time: 3:16:43 PM Pacific  
BioScience Laboratories, Inc. (Clarisonic) WO#: 89322  
FCC 15.107 Class B - AVE Test Lead: Black 120V 60Hz Sequence#: 26 Polarity: Black

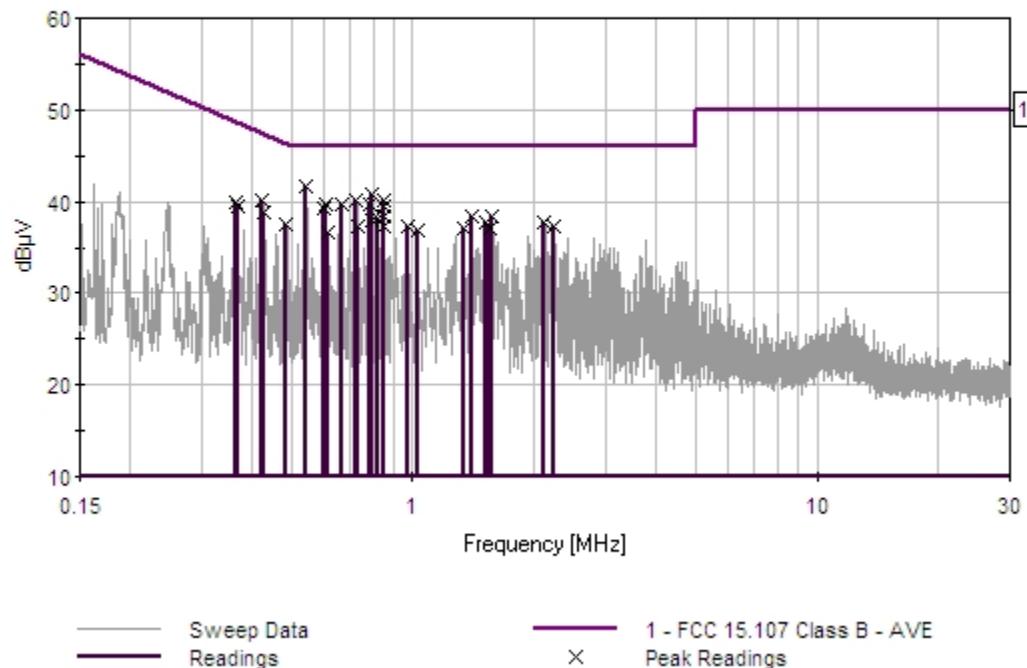

Test Location: CKC Laboratories • 22116 23rd Dr SE • Bothell, WA 98021-4413 • 425-402-1717

Customer: **Pacific BioScience Laboratories, Inc. (Clarisonic)**

Specification: **FCC 15.107 Class B - AVE**

Work Order #: **89332**

Date: **3/18/2009**

Test Type: **Conducted Emissions**

Time: **3:19:45 PM**

Equipment: **AC/DC Adapter**

Sequence#: **27**

Manufacturer: **Clarisonic**

Tested By: **A. Brar**

Model: **PBL3100-479**

120V 60Hz

S/N: **AD64**

**Test Equipment:**

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4440A	MY46186330	01/31/2008	01/31/2010	AN02872
Cable 30'	11	11/05/2008	11/05/2010	ANP05366
Cable 6'	49	11/10/2008	11/10/2010	ANP05371
Cable 20'	16	11/10/2008	11/10/2010	ANP05360
Attenuator	9912	03/21/2008	03/21/2010	ANP05503
EMCO LISN	9606-1049	06/01/2007	06/01/2009	AN01492

**Equipment Under Test (\* = EUT):**

Function	Manufacturer	Model #	S/N
Sonic Skin Care Brush	Clarisonic	MIA	EMC4

**Support Devices:**

Function	Manufacturer	Model #	S/N
AC/DC Adapter	Clarisonic	PBL3100-479	AD64
Charger Base	Clarisonic	PBL4110	74

**Test Conditions / Notes:**

FCC Part 15B

EUT is in upright position and it is being charged. This EUT is fully discharged.

**Transducer Legend:**


T1=CAB-ANP05371	T2=CAB-ANP05366
T3=ATT-ANP5503-032108	T4=CAB-ANP05360
T5=CDN-AN01492-060107 - Neutral	

**Measurement Data:**

#	Freq MHz	Rdng dB $\mu$ V	Reading listed by margin.				Test Lead: White			
			T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB $\mu$ V	Spec dB $\mu$ V	Margin dB
1	725.947k	27.3	+0.0 +0.2	+0.1	+10.1	+0.1	+0.0	37.8	46.0	-8.2
2	544.873k	27.0	+0.1 +0.2	+0.0	+10.1	+0.1	+0.0	37.5	46.0	-8.5
3	786.305k	26.5	+0.0 +0.2	+0.1	+10.1	+0.1	+0.0	37.0	46.0	-9.0
4	1.422M	26.4	+0.1 +0.2	+0.1	+10.1	+0.1	+0.0	37.0	46.0	-9.0
5	1.456M	26.3	+0.1 +0.2	+0.1	+10.1	+0.1	+0.0	36.9	46.0	-9.1
6	424.884k	27.8	+0.1 +0.2	+0.0	+10.1	+0.1	+0.0	38.3	47.4	-9.1


7	664.862k	25.8	+0.1 +0.2	+0.0	+10.1	+0.1	+0.0	36.3	46.0	-9.7	White
8	1.332M	25.6	+0.0 +0.2	+0.1	+10.1	+0.1	+0.0	36.1	46.0	-9.9	White
9	1.396M	25.6	+0.0 +0.2	+0.1	+10.1	+0.1	+0.0	36.1	46.0	-9.9	White
10	2.183M	25.5	+0.1 +0.2	+0.1	+10.1	+0.1	+0.0	36.1	46.0	-9.9	White
11	2.242M	25.5	+0.1 +0.2	+0.1	+10.1	+0.1	+0.0	36.1	46.0	-9.9	White
12	1.515M	25.4	+0.1 +0.2	+0.1	+10.1	+0.1	+0.0	36.0	46.0	-10.0	White
13	1.575M	25.4	+0.1 +0.2	+0.1	+10.1	+0.1	+0.0	36.0	46.0	-10.0	White
14	606.685k	25.1	+0.1 +0.2	+0.0	+10.1	+0.1	+0.0	35.6	46.0	-10.4	White
15	755.763k	25.1	+0.0 +0.2	+0.1	+10.1	+0.1	+0.0	35.6	46.0	-10.4	White
16	847.391k	25.1	+0.0 +0.2	+0.1	+10.1	+0.1	+0.0	35.6	46.0	-10.4	White
17	1.634M	25.0	+0.1 +0.2	+0.1	+10.1	+0.1	+0.0	35.6	46.0	-10.4	White
18	366.707k	27.4	+0.1 +0.2	+0.0	+10.1	+0.1	+0.0	37.9	48.6	-10.7	White
19	482.333k	25.0	+0.1 +0.2	+0.0	+10.1	+0.1	+0.0	35.5	46.3	-10.8	White
20	602.322k	24.7	+0.1 +0.2	+0.0	+10.1	+0.1	+0.0	35.2	46.0	-10.8	White
21	817.575k	24.7	+0.0 +0.2	+0.1	+10.1	+0.1	+0.0	35.2	46.0	-10.8	White
22	843.755k	24.7	+0.0 +0.2	+0.1	+10.1	+0.1	+0.0	35.2	46.0	-10.8	White
23	970.765k	24.6	+0.0 +0.2	+0.1	+10.1	+0.1	+0.0	35.1	46.0	-10.9	White
24	1.090M	24.6	+0.0 +0.2	+0.1	+10.1	+0.1	+0.0	35.1	46.0	-10.9	White
25	2.361M	24.5	+0.1 +0.2	+0.1	+10.1	+0.1	+0.0	35.1	46.0	-10.9	White
26	2.123M	24.4	+0.1 +0.2	+0.1	+10.1	+0.1	+0.0	35.0	46.0	-11.0	White
27	1.758M	24.0	+0.1 +0.2	+0.1	+10.1	+0.1	+0.0	34.6	46.0	-11.4	White
28	2.302M	24.0	+0.1 +0.2	+0.1	+10.1	+0.1	+0.0	34.6	46.0	-11.4	White
29	3.089M	24.0	+0.1 +0.2	+0.1	+10.1	+0.1	+0.0	34.6	46.0	-11.4	White
30	2.421M	23.9	+0.1 +0.2	+0.1	+10.1	+0.1	+0.0	34.5	46.0	-11.5	White

CKC Laboratories Date: 3/18/2009 Time: 3:19:45 PM Pacific  
BioScience Laboratories, Inc. (Clarisonic) WO#: 89322  
FCC 15.107 Class B - AVE Test Lead: White 120V 60Hz Sequence#: 27 Polarity: White

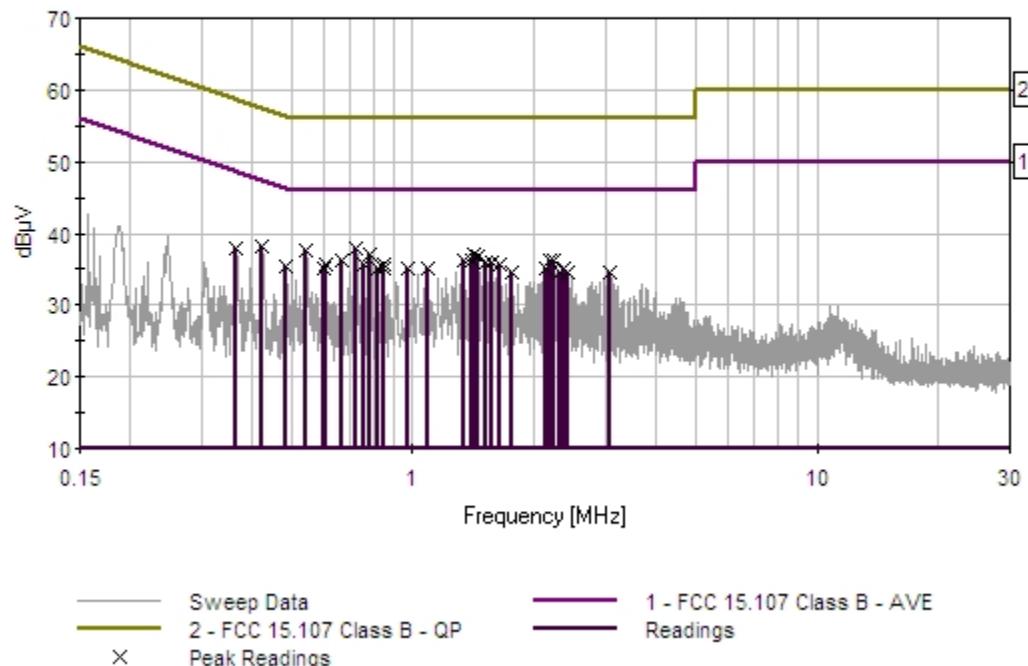

## RADIATED EMISSIONS

### Test Setup Photos

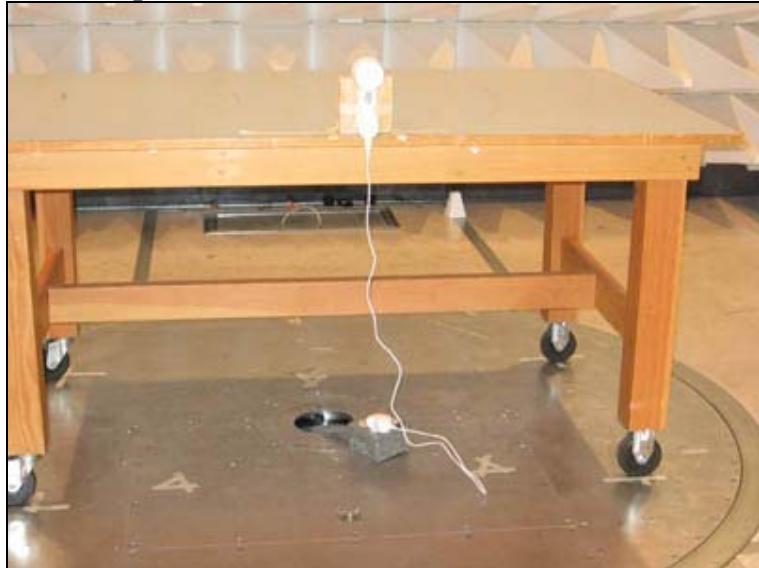



## Test Data Sheets

Test Location: CKC Laboratories • 22116 23rd Dr SE • Bothell, WA 98021-4413 • 425-402-1717

Customer: **Pacific BioScience Laboratories, Inc. (Clarisonic)**

Specification: **15.109 CLASS B**

Work Order #: **89332**

Date: **3/18/2009**

Test Type: **Maximized Emissions**

Time: **8:41:31 AM**

Equipment: **Sonic Skin Care Brush**

Sequence#: **7**

Manufacturer: **Clarisonic**

Tested By: **A. Brar**

Model: **MIA**

S/N: **EMC1**

### Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
HP 8447D Preamp	2944A08601	07/08/2008	07/08/2010	AN01517
Agilent E4440A	MY46186330	01/31/2008	01/31/2010	AN02872
Cable 6'	51	12/30/2008	12/30/2010	ANP05361
Antenna	2453	12/22/2008	12/22/2010	AN01994
Cable 30'	11	11/05/2008	11/05/2010	ANP05366
Cable 6'	49	11/10/2008	11/10/2010	ANP05371
Cable 20'	16	11/10/2008	11/10/2010	ANP05360

### Equipment Under Test (\* = EUT):

Function	Manufacturer	Model #	S/N
Sonic Skin Care Brush*	Clarisonic	MIA	EMC1

### Support Devices:

Function	Manufacturer	Model #	S/N

### Test Conditions / Notes:

FCC Part 15B

EUT is in run mode in upright position.

### Transducer Legend:

T1=AMP-AN01517-070808	T2=ANT AN01994 25-1000MHz
T3=CAB-ANP05360	T4=CAB-ANP05361
T5=CAB-ANP05366	T6=CAB-ANP05371

### Measurement Data:

#	Freq	Rdng	Reading listed by margin.				Test Distance: 3 Meters				
			T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6			Table	dB $\mu$ V/m	dB $\mu$ V/m		
	MHz	dB $\mu$ V	dB	dB	dB	dB	Table	dB $\mu$ V/m	dB $\mu$ V/m		Ant
1	87.299M	43.5	-29.1 +0.5	+8.5 +0.2	+0.5	+0.1	+0.0	24.2	40.0	-15.8	Horiz
2	31.198M	28.7	-29.2 +0.3	+20.0 +0.2	+0.3	+0.1	+0.0	20.4	40.0	-19.6	Vert
3	937.577M	26.8	-29.2 +2.0	+23.6 +0.5	+2.0	+0.5	+0.0	26.2	46.0	-19.8	Vert
4	32.462M	28.5	-29.1 +0.3	+19.6 +0.2	+0.3	+0.1	+0.0	19.9	40.0	-20.1	Vert
5	934.987M	26.2	-29.2 +2.0	+23.6 +0.5	+2.0	+0.5	+0.0	25.6	46.0	-20.4	Vert
6	943.963M	26.0	-29.2 +2.1	+23.7 +0.5	+1.9	+0.5	+0.0	25.5	46.0	-20.5	Vert

7	935.227M	26.0	-29.2 +2.0	+23.6 +0.5	+2.0	+0.5	+0.0	25.4	46.0	-20.6	Horiz
8	903.395M	26.7	-29.3 +2.0	+23.1 +0.3	+1.9	+0.5	+0.0	25.2	46.0	-20.8	Horiz
9	945.841M	25.5	-29.2 +2.1	+23.7 +0.5	+1.9	+0.5	+0.0	25.0	46.0	-21.0	Horiz
10	957.675M	25.3	-29.2 +2.1	+23.9 +0.5	+1.9	+0.5	+0.0	25.0	46.0	-21.0	Horiz
11	955.797M	25.4	-29.2 +2.1	+23.8 +0.5	+1.9	+0.5	+0.0	25.0	46.0	-21.0	Vert

Test Location: CKC Laboratories • 22116 23rd Dr SE • Bothell, WA 98021-4413 • 425-402-1717

Customer: **Pacific BioScience Laboratories, Inc. (Clarisonic)**

Specification: **15.109 CLASS B**

Work Order #: **89332**

Date: 3/18/2009

Test Type: **Radiated Scan**

Time: 11:09:16

Equipment: **Sonic Skin Care Brush**

Sequence#: 10

Manufacturer: Clarisonic

Tested By: A. Brar

Model: **MIA**

S/N: **EMC4**

**Test Equipment:**

Function	S/N	Calibration Date	Cal Due Date	Asset #
HP 8447D Preamp	2944A08601	07/08/2008	07/08/2010	AN01517
Agilent E4440A	MY46186330	01/31/2008	01/31/2010	AN02872
Cable 6'	51	12/30/2008	12/30/2010	ANP05361
Antenna	2453	12/22/2008	12/22/2010	AN01994
Cable 30'	11	11/05/2008	11/05/2010	ANP05366
Cable 6'	49	11/10/2008	11/10/2010	ANP05371
Cable 20'	16	11/10/2008	11/10/2010	ANP05360

**Equipment Under Test (\* = EUT):**

Function	Manufacturer	Model #	S/N
Sonic Skin Care Brush*	Clarisonic	MIA	EMC4

**Support Devices:**

Function	Manufacturer	Model #	S/N
Charger Base	Clarisonic	PBL4110	74
AC/DC Adapter	Clarisonic	PBL3100-479	AD64

**Test Conditions / Notes:**

FCC Part 15B  
 EUT is in upright position and it is being charged. This EUT is fully discharged.

**Transducer Legend:**

T1=AMP-AN01517-070808	T2=ANT AN01994 25-1000MHz
T3=CAB-ANP05360	T4=CAB-ANP05361
T5=CAB-ANP05366	T6=CAB-ANP05371

**Measurement Data:** Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1 T5	T2 T6	T3	T4	Dist	Corr	Spec	Margin	Polar
			MHz	dB $\mu$ V	dB	dB	Table	dB $\mu$ V/m	dB $\mu$ V/m	dB	Ant
1	77.668M	48.5	-29.1 +0.5	+7.3 +0.2	+0.5	+0.1	+0.0 46	28.0	40.0	-12.0	Vert 100
2	72.000M	45.4	-29.2 +0.5	+6.6 +0.2	+0.5	+0.1	+0.0 360	24.1	40.0	-15.9	Vert 150
3	30.295M	29.9	-29.2 +0.3	+20.3 +0.2	+0.3	+0.1	+0.0 360	21.9	40.0	-18.1	Vert 150
4	69.728M	42.9	-29.2 +0.5	+6.4 +0.2	+0.5	+0.1	+0.0 360	21.4	40.0	-18.6	Vert 150
5	70.106M	42.7	-29.2 +0.5	+6.4 +0.2	+0.5	+0.1	+0.0 360	21.2	40.0	-18.8	Vert 150

6	30.253M	27.6	-29.2 +0.3	+20.3 +0.2	+0.3	+0.1	+0.0	19.6	40.0	-20.4	Horiz 150
7	943.953M	26.1	-29.2 +2.1	+23.7 +0.5	+1.9	+0.5	+0.0	25.6	46.0	-20.4	Horiz 150
8	68.591M	41.3	-29.2 +0.5	+6.2 +0.2	+0.5	+0.1	+0.0	19.6 360	40.0	-20.4	Vert 150