

## **Certification Test Report**

**FCC ID: SDBHANXCVR01  
IC: 2220A-HANXCVR01**

**FCC Rule Part: CFR 47 24 Subpart D, Part 90 Subpart I, Part 101  
Subpart C**

**IC Standards Specification: RSS-119, RSS-134**

**ACS Report Number: 08-0233-LD**

**Manufacturer: Sensus Metering Systems  
Model: HANXCVR01**

**Test Begin Date: June 23, 2008  
Test End Date: July 01, 2008**

**Report Issue Date: October 28, 2008**



FOR THE SCOPE OF ACCREDITATION UNDER LAB Code 200612-0

This report is not to be used to claim certification, approval, or endorsement by NVLAP, NIST or any government agency.

Prepared by: Ken Rivers  
**Ken Rivers**  
**Wireless Certifications Technician**  
**ACS, Inc.**

Reviewed by: [Signature]  
**Kirby Munroe**  
**Director, Wireless Certifications**  
**ACS, Inc.**

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

**This report contains 26 pages**

# Table of Content

---

<b>1.0 General</b>	3
1.1 Purpose	3
1.2 Product Description	3
1.3 Test Methodology and Configuration	3
1.3.1 Test Configurations and Justification	3
1.3.2 In-Band Testing Methodology	4
1.4 Emissions Designators	4
<b>2.0 Test Facilities</b>	5
2.1 Location	5
2.2 Laboratory Accreditations/Recognitions/Certifications	5
2.3 Radiated Emissions Test Site Description	6
2.3.1 Semi-Anechoic Chamber Test Site	6
2.3.2 Open Area Tests Site (OATS)	7
2.4 Conducted Emissions Test Site Description	8
<b>3.0 Applicable Standards and References</b>	8
<b>4.0 List of Test Equipment</b>	9
<b>5.0 Support Equipment</b>	10
<b>6.0 EUT Setup and Block Diagram</b>	10
<b>7.0 Summary of Tests</b>	11
7.1 RF Power Output	11
7.1.1 Measurement Procedure	11
7.1.2 Measurement Results	11
7.2 Occupied Bandwidth (Emission Limits)	13
7.2.1 Measurement Procedure	13
7.2.2 Measurement Results	13
7.3 Spurious Emissions at Antenna Terminals	16
7.3.1 Measurement Procedure	16
7.3.2 Measurement Results	16
7.4 Field Strength of Spurious Emissions	19
7.4.1 Measurement Procedure	19
7.4.2 Measurement Results	19
7.5 Frequency Stability	20
7.5.1 Measurement Procedure	20
7.5.2 Measurement Results	21
7.6 Radiated Emissions (Unintentional Radiators)	25
7.6.1 Measurement Procedure	25
7.6.2 Measurement Results	25
7.7 Power Line Conducted Emissions	26
7.7.1 Measurement Procedure	26
7.7.2 Measurement Results	26
<b>8.0 Conclusion</b>	26

## **Additional Exhibits Included In Filing**

Internal Photographs	Schematics
Tune-up Procedure	Test Setup Photographs
Label Information	RF Exposure – MPE Calculations
Manual	System Block Diagram
Theory of Operation	Parts List

## 1.0 GENERAL

### 1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 2 Subpart J, Part 24 Subpart D, Part 90 Subpart I, and Part 101 Subpart C of the FCC's Code of Federal Regulations and RSS-119 and RSS-134.

### 1.2 Product Description

The HANXCVR01 is intended to operate as a daughter board or "host expansion board" for a specified host device (i.e. Thermostat, Load Control Module) for access to the Sensus FlexNet™ network.

Manufacturer Information:  
Sensus Metering Systems  
8601 six forks Road  
Raleigh, NC 27615

Factory Contact:  
Bob Davis  
Sensus Metering Systems  
114 Northpark Blvd  
Suite 10  
Covington, LA 70433  
985-773-1236

Test Sample Serial Numbers: #2 (RF conducted), #3 (radiated)

Test Sample Condition: The test samples were provided in good working order with no visible defects.

Detailed photographs of the EUT are filed separately with this filing.

### 1.3 Test Methodology and Configurations

#### 1.3.1 Test Configurations and Justification

For RF conducted measurements, the HANXCVR01 was modified with an external RF connector to the PCB. The HANXCVR01 utilizes non-detachable antennas for normal operation but for RF conducted testing the antennas were disconnected and a 50-Ohm test cable soldered (with the appropriate ground connection) to the PCB.

For AC power line conducted emissions measurements, the HANXCVR01 was integrated into a typical host device. See section 6.0 for test setup details.

**1.3.2 In-Band Testing Methodology**

For testing in accordance with 47 CFR 2.1046-2.1057, OET/Lab recommends that the following be used to select test frequencies for licensed devices:

Frequency range over which device operates	Number of frequencies	Location in the range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near top and 1 near bottom
10 to 100 MHz	3	1 near top, 1 near middle and 1 near bottom

The HANXCVR01 is designed to operate in multiple bands under the requirements of CFR 47 Parts 24, 90, and 101. The following is a list of the frequency bands of operation sorted based on the FCC rule parts in which the band is associated.

CFR Title 47 Rule Part / IC Radio Standards Specification	Frequency Band of Operation (MHz)
24D / RSS-134	940.0 - 941.0
90 / RSS-119	935.0 - 940.0
101 / RSS-119	932.0 - 932.5
101 / RSS-119	941.0 - 941.5
101	959.85 - 960.0

Based on the requirements set forth in accordance 47 CFR 2.1046-2.1057 as stated above, the methodology in selecting the places to test in the bands of operation is outlined in the following table.

CFR Title 47 Rule Part / IC Radio Standards Specification	Frequency Band of Operation (MHz)	Location in the Range of Operation
101 / RSS-119	932.0 - 932.5	Middle
90 / RSS-119	935.0 - 940.0	1 near top and 1 near bottom
24D / RSS-134	940.0 - 941.0	
101 / RSS-119	941.0 - 941.5	
101	959.85 - 960.0	Middle

The data provided in this report is sorted based on the rule part.

**1.4 Emission Designators**

The HANXCVR01 transmitter produces a single modulation format, 2 level MSK/GFSK (MPass Mode).

The emissions designator is 5K90F1D.

## 2.0 TEST FACILITIES

### 2.1 Location

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions  
5015 B.U. Bowman Drive  
Buford, GA 30518  
Phone: (770) 831-8048  
Fax: (770) 831-8598

### 2.2 Laboratory Accreditations/Recognitions/Certifications

The Semi-Anechoic Chamber Test Site, Open Area Test Site (OATS) and Conducted Emissions Site have been fully described, submitted to, and accepted by the FCC, Industry Canada and the Japanese Voluntary Control Council for Interference by information technology equipment. In addition, ACS is compliant to ISO 17025 as certified by the National Institute of Standards and Technology under their National Voluntary Laboratory Accreditation Program. The following certification numbers have been issued in recognition of these accreditations and certifications:

FCC Registration Number: 894540  
Industry Canada Lab Code: IC 4175  
VCCI Member Number: 1831  
- VCCI OATS Registration Number R-1526  
- VCCI Conducted Emissions Site Registration Number: C-1608  
NVLAP Lab Code: 200612-0

### 2.3 Radiated Emissions Test Site Description

#### 2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of a 20' x 30' x 18' shielded enclosure. The chamber is lined with Toyo Ferrite Grid Absorber, model number FFG-1000. The ferrite tile grid is 101 x 101 x 19mm thick and weighs approximately 550 grams. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber.

The turntable is 150cm in diameter and is located 160cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Behind the turntable is a 3' x 6' x 4' deep shielded pit used for support equipment if necessary. The pit is equipped with 1 - 4" PVC chases from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3-1 below:

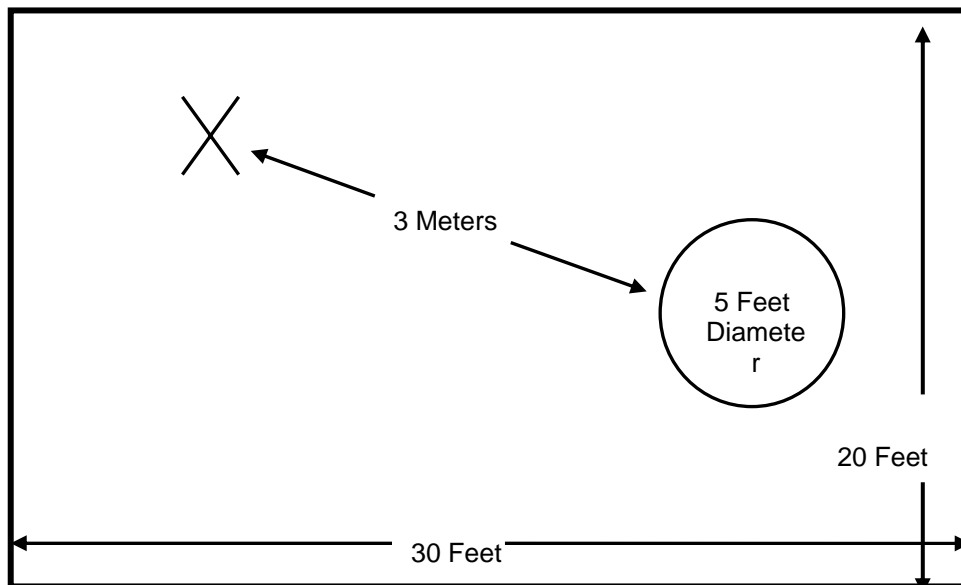


Figure 2.3-1: Semi-Anechoic Chamber Test Site

**2.3.2 Open Area Tests Site (OATS)**


The open area test site consists of a 40' x 66' concrete pad covered with a perforated electro-plated galvanized sheet metal. The perforations in the sheet metal are 1/8" holes that are staggered every 3/16". The individual sheets are placed to overlap each other by 1/4" and are riveted together to provide a continuous seam. Rivets are spaced every 3" in a 3 x 20 meter perimeter around the antenna mast and EUT area. Rivets in the remaining area are spaced as necessary to properly secure the ground plane and maintain the electrical continuity.

The entire ground plane extends 12' beyond the turntable edge and 16' beyond the antenna mast when set to a 10 meter measurement distance. The ground plane is grounded via 4 - 8' copper ground rods, each installed at a corner of the ground plane and bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is an all aluminum 10' flush mounted table installed in an all aluminum frame. The table is remotely operated from inside the control room located 40' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Adjacent to the turntable is a 7' x 7' square and 4' deep concrete pit used for support equipment if necessary. The pit is equipped with 5 - 4" PVC chases from the pit to the control room that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit. The pit is covered with 2 sheets of 1/4" diamond style re-enforced steel sheets. The sheets are painted to match the perforated steel ground plane; however the underside edges have been masked off to maintain the electrical continuity of the ground plane. All reflecting objects are located outside of the ellipse defined in ANSI C63.4.

A diagram of the Open Area Test Site is shown in Figure 2.3-2 below:

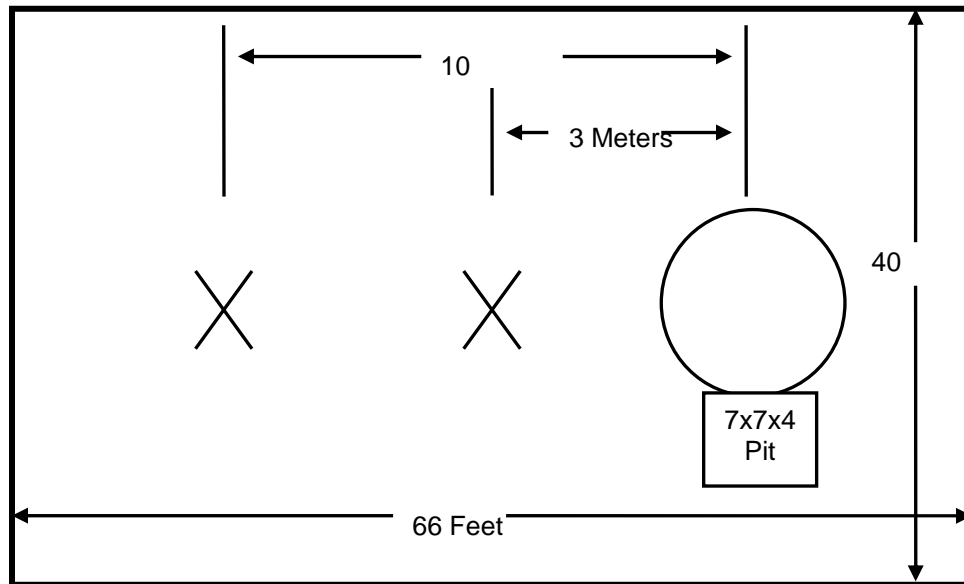

**Figure 2.3-2: Open Area Test Site**

## 2.4 Conducted Emissions Test Site Description

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 8' solid aluminum horizontal group reference plane (GRP) bonded every 3" to an 8' X 8' vertical ground plane.

The site is of sufficient size to test table top and floor standing equipment in accordance with section 6.1.4 of ANSI C63.4.

A diagram of the room is shown below in figure 4.1.3-1:

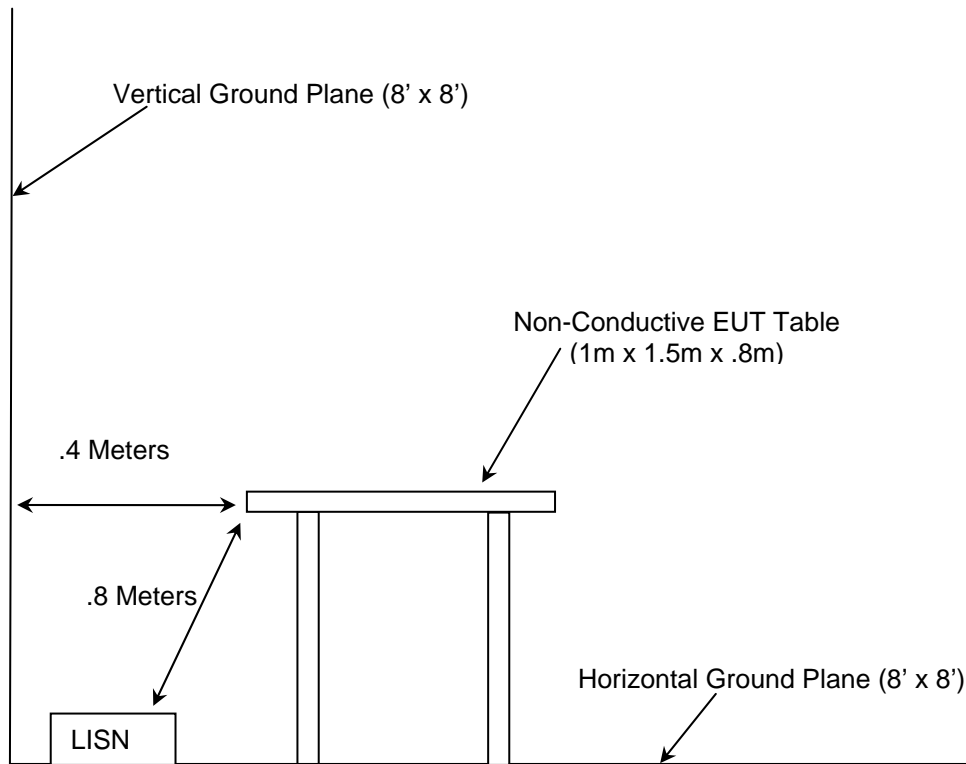


Figure 2.4-1: AC Mains Conducted EMI Site

## 3.0 APPLICABLE STANDARD REFERENCES

The following standards were used:

- 1 - ANSI C63.4-2003: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9KHz to 40GHz - 2003
- 2 - US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures - 2008
- 3 - US Code of Federal Regulations (CFR): Title 47, Part 24, Subpart D: Personal Communication Service - 2008
- 4 - US Code of Federal Regulations (CFR): Title 47, Part 90, Subpart I: Private Land Mobile Radio Services - 2008
- 5 - US Code of Federal Regulations (CFR): Title 47, Part 101, Subpart C: Fixed Microwave Services – 2008
- 6 – TIA-603-C: Land Mobile FM or PM - Communications Equipment - Measurement and Performance Standards – 2004
- 7 - Industry Canada Radio Standards Specification: RSS-119 - Land Mobile and Fixed Radio Transmitters and Receivers Operating in the Frequency Range 27.41-960 MHz - Issue 9, June 2007
- 8 - Industry Canada Radio Standards Specification: RSS-134 - 900 MHz Narrowband Personal Communications Services - Issue 1, Revision 1, March 25, 2000



#### 4.0 LIST OF TEST EQUIPMENT

All test equipment used for regulatory testing is calibrated yearly or according to manufacturer's specifications.

**Table 4-1: Test Equipment**

Equipment Calibration Information					
ACS#	Mfg.	Eq. type	Model	S/N	Cal. Due
3	Rohde & Schwarz	Spectrum Analyzers	ESMI - Display	839379/011	10-26-2008
4	Rohde & Schwarz	Spectrum Analyzers	ESMI - Receiver	833827/003	10-26-2008
22	Agilent	Amplifiers	8449B	3008A00526	10-25-2008
25	Chase	Antennas	CBL6111	1043	08-08-2008
30	Spectrum Technologies	Antennas	DRH-0118	970102	05-07-2009
70	Rohde & Schwarz	Spectrum Analyzers	ESH-3	879676/050	10-24-2008
73	Agilent	Amplifiers	8447D	2727A05624	12-19-2008
140	Thermotron	Environmental Chamber	SM-16C	19639	08-30-2008
144	Omega	Climate Monitoring Equipment	RH4111	H0103373	11-29-2008
152	EMCO	LISN	Feb-25	9111-1905	03-26-2009
153	EMCO	LISN	Feb-25	9411-2268	11-27-2008
167	ACS	Cable Set	Chamber EMI Cable Set	167	01-04-2009
168	Hewlett Packard	Attenuators	11947A	44829	02-18-2009
253	Florida RF Labs	Cables	Lab-Flex 290	253	01-04-2009
283	Rohde & Schwarz	Spectrum Analyzers	FSP40	1000033	11-09-2008
291	Florida RF Cables	Cables	SMRE-200W-12.0-SMRE	None	11-21-2008
292	Florida RF Cables	Cables	SMR-290AW-480.0-SMR	None	11-21-2008
321	Hewlett Packard	Amplifiers	HPC 8447D	1937A02809	06-16-2009
324	ACS	Cables	Belden	8214	07-10-2008
337	Microwave Circuits	Filters	H1G513G1	282706	08-28-2008
338	Hewlett Packard	Amplifiers	8449B	3008A01111	10-24-2008
339	Aeroflex/Weinschel	Attenuators	AS-18	7142	08-20-2008
422	Florida RF	Cables	SMS-200AW-72.0-SMR	805	02-25-2009
NA	Agilent	Signal Generator	E8257D	MY46521977	02-23-2010

5.0 SUPPORT EQUIPMENT

Table 5-1: Support Equipment

Item	Equipment Type	Manufacturer	Model Number	Serial Number(s)
1	EUT (Module)	Sensus	HANXCVR01	ACS#2, ACS#3
2	Wireless Load Control (Host)	HAI	73A00-1	ACS#4
3	DC Power Supply	OK Industries	PS732	36095

6.0 EQUIPMENT UNDER TEST SETUP AND BLOCK DIAGRAM

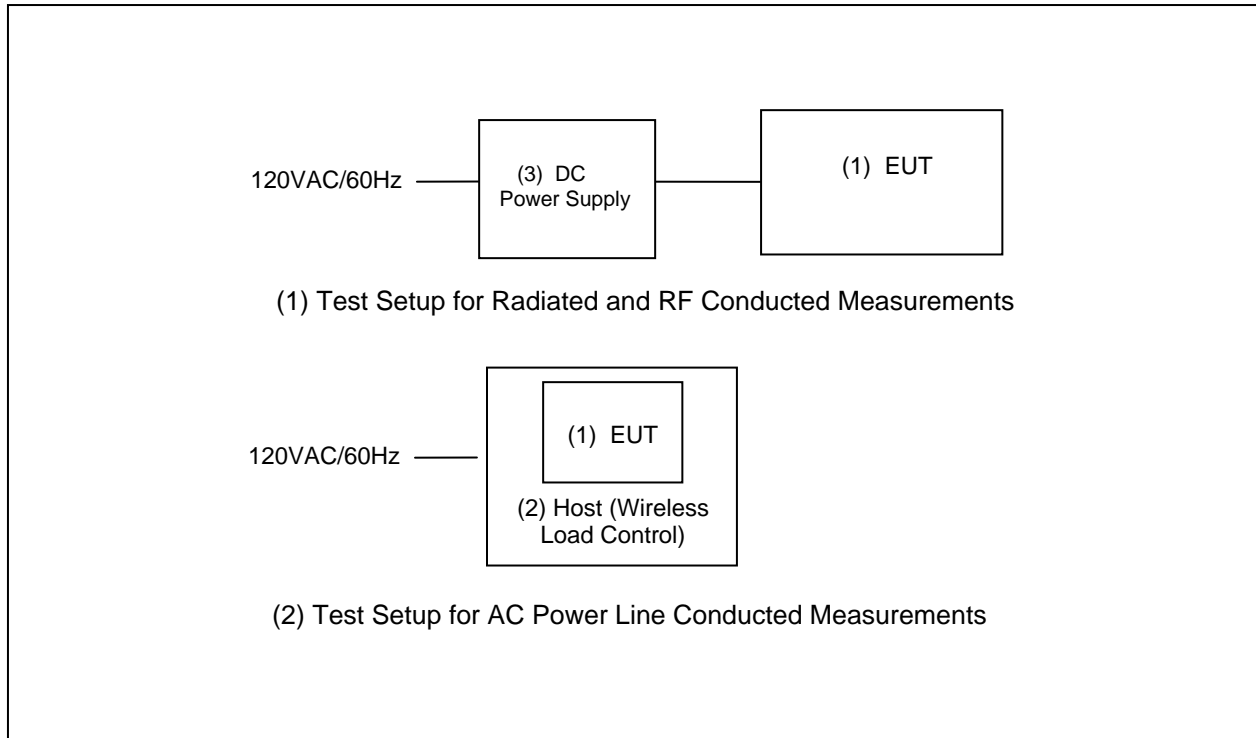


Figure 6-1: EUT Test Setup

Note: For RF conducted measurements, the HANXCVR01 was modified with an external RF connector to the PCB. The HANXCVR01 utilizes a non-detachable antenna for normal operation but for RF conducted testing the antenna were disconnected and a 50-Ohm test cable soldered (with the appropriate ground connection) to the PCB. The 50-Ohm test cable was directly connected to spectrum analyzer via an attenuator.

**7.0 SUMMARY OF TESTS**

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

**7.1 RF Power Output – Part 24.132(b), Part 90.635(d), Part 101.113(a) / RSS-119 5.41, RSS-134 5.4(a)**


**7.1.1 Measurement Procedure**

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer through a 10 dB passive attenuator. The resolution and video bandwidths of the spectrum analyzer were set at sufficient levels, >> signal bandwidth, to produce accurate results. The internal correction factors of the spectrum analyzer were employed to correct for any cable or attenuator losses. Results are shown below in Table 7.1.2-1 and Figure 7.1.2-1 through 7.1.2-8.

**7.1.2 Measurement Results**

**Table 7.1.2-1: Peak Output Power**

Frequency (MHz)	Output Power (dBm)
932.2500	16.49
935.0125	16.57
941.4875	16.38
959.9250	16.24

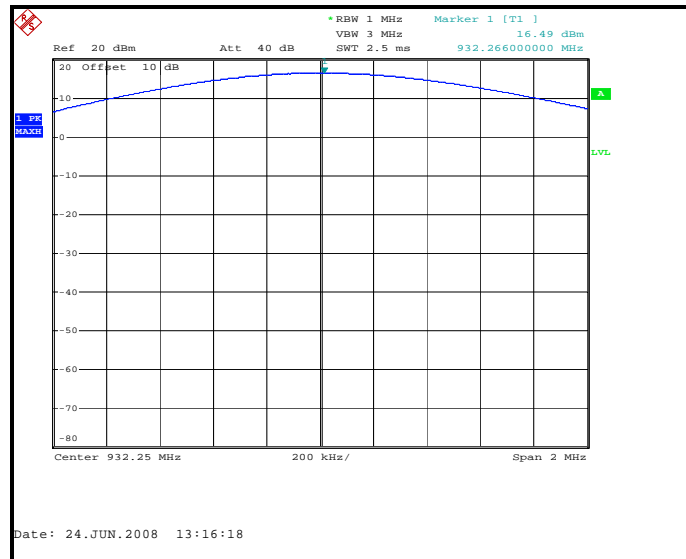

**Figure 7.1.2-1: Peak Output Power 932.25 MHz**

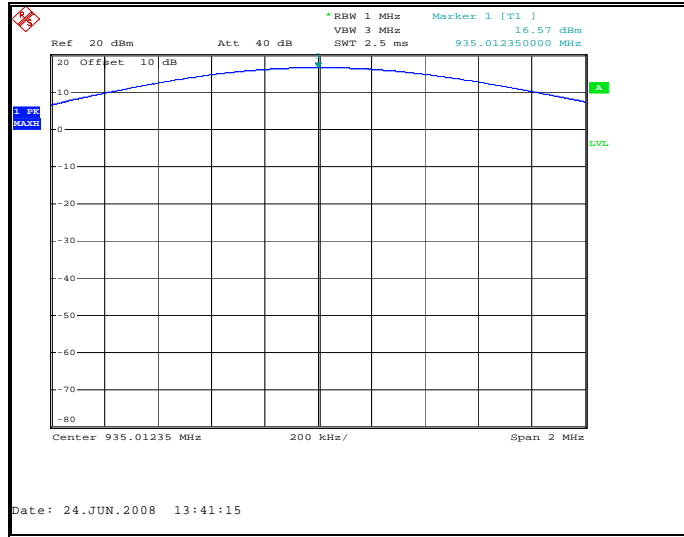


Figure 7.1.2-2: Peak Output Power 935.0125 MHz

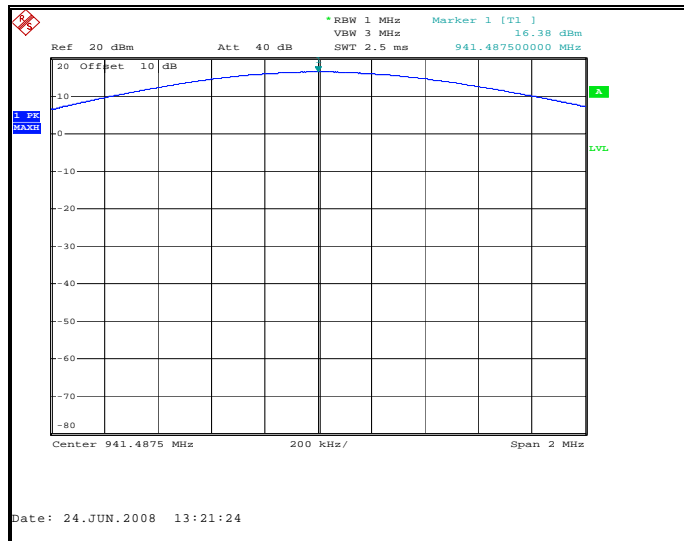


Figure 7.1.2-3: Peak Output Power 941.4875 MHz

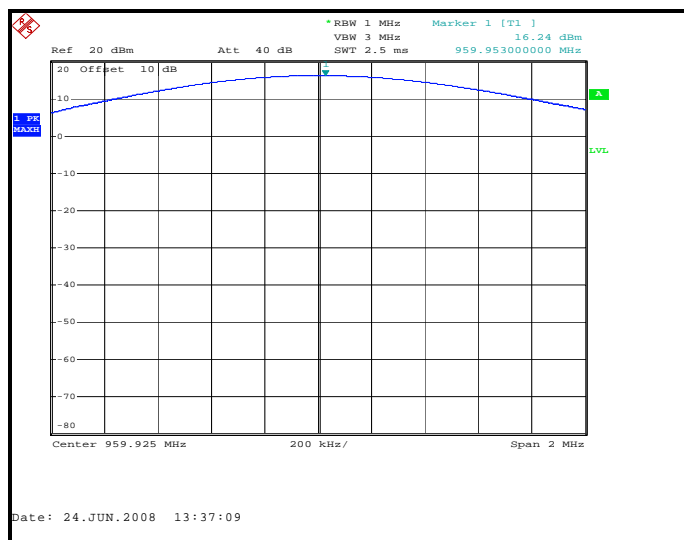


Figure 7.1.2-4: Peak Output Power 959.925 MHz

## 7.2 Occupied Bandwidth (Emission Limits)

### 7.2.1 Measurement Procedure

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer through a 10 dB passive attenuator. The spectrum analyzer resolution and video bandwidths were set to 300 Hz and 3 kHz respectively. The internal correction factors of the spectrum analyzer were employed to correct for any cable or attenuator losses. Results are shown below in Figures 7.2.2-1 through 7.2.2-6.

### 7.2.2 Measurement Results

#### Part 24.133(a)(1),(a)(2), IC RSS-134 6.3(i), (ii)

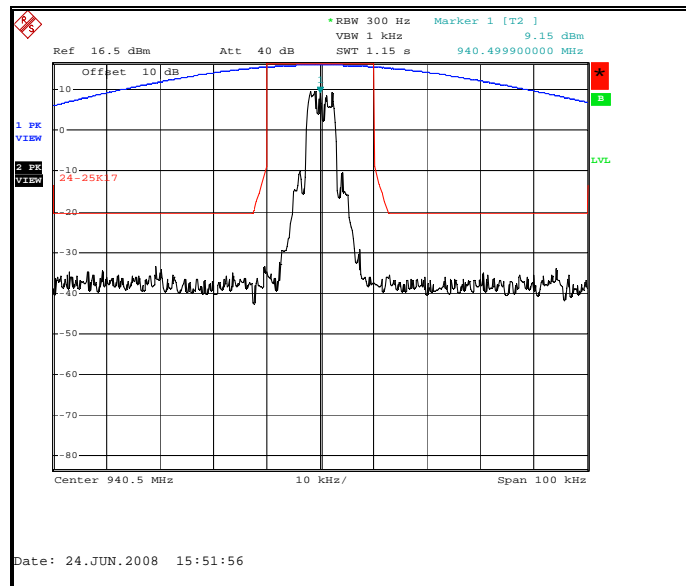


Figure 7.2.2-1: Emission Limits - 940.5 MHz – 25 kHz Channel


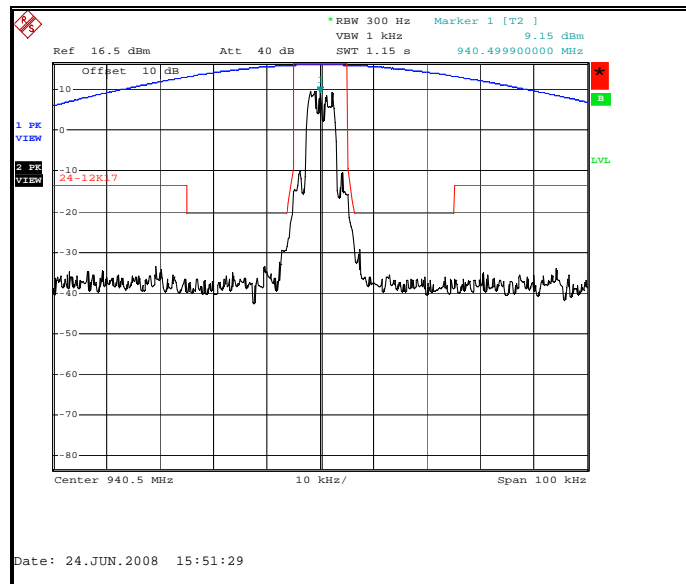


Figure 7.2.2-2: Emission Limits – 940.5 MHz – 12.5 kHz Channel


**Part 90.210(j), RSS-119 5.8.8**

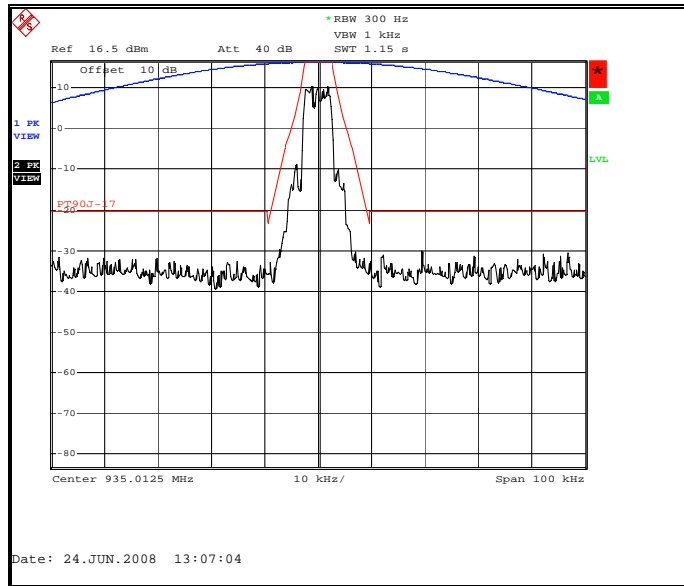

**Figure 7.2.2-3: Emission Limits – 935.0125 MHz**

**Part 101.111(a)(6), RSS-119 5.8.6\***

\* FCC Part 101.111(a)(6) provides worst case

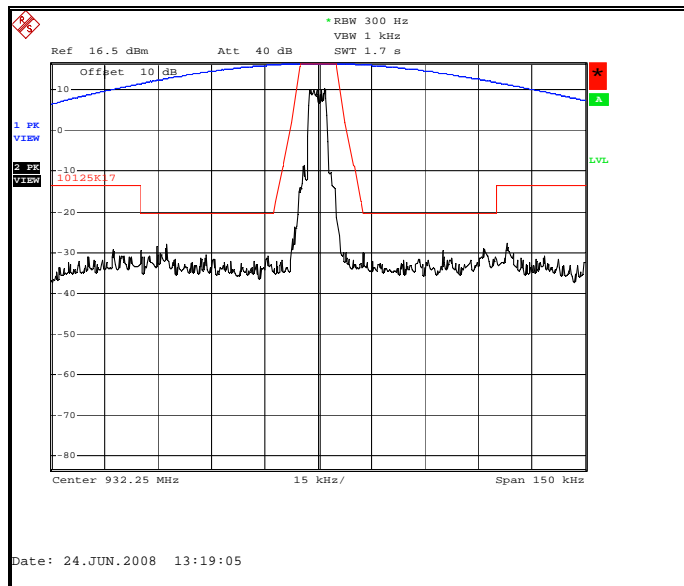

**Figure 7.2.2-4: Emission Limits – 932.25 MHz**

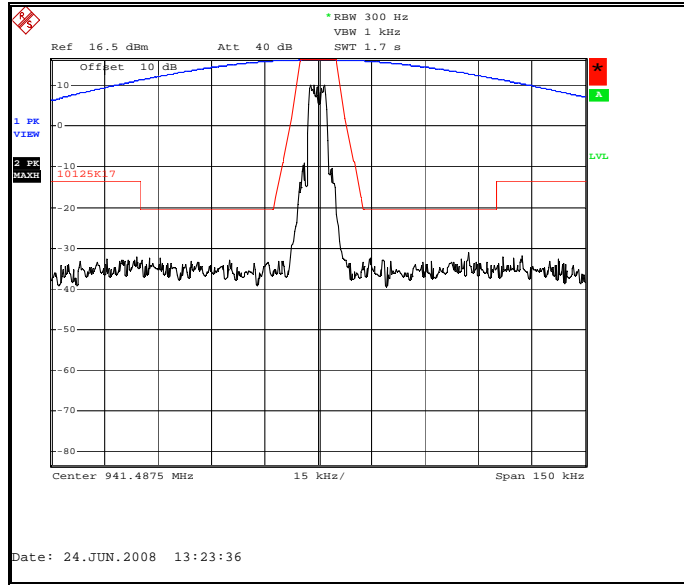


Figure 7.2.2-5: Emission Limits – 941.4875 MHz

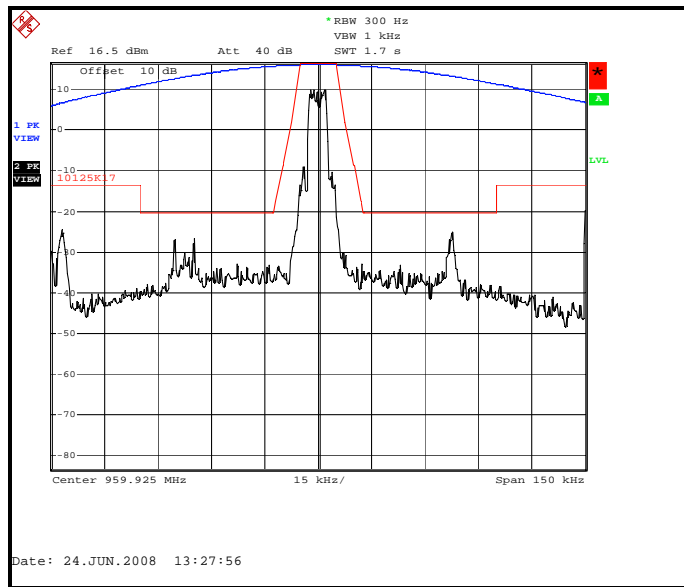



Figure 7.2.2-6: Emission Limits – 959.925 MHz

**7.3 Spurious Emissions at Antenna Terminals – Part 24.133(a)(1)(ii), (a)(2)(ii), Part 90.210(j), Part 101.111(a)(6) / RSS-119 5.8.8, 5.8.6, RSS-134 6.3(i)(ii)**


**7.3.1 Measurement Procedure**

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer through a 10 dB passive attenuator. The spectrum analyzer resolution bandwidth was set to 100 kHz below 1000 MHz and 1 MHz above 1000 MHz. The internal correction factors of the spectrum analyzer were employed to correct for any cable or attenuator losses. The spectrum was investigated in accordance to CFR 47 Part 2.1057. Measurement results are shown below in Figures 7.3.2-1 through 7.3.2.8.

**7.3.2 Measurement Results**

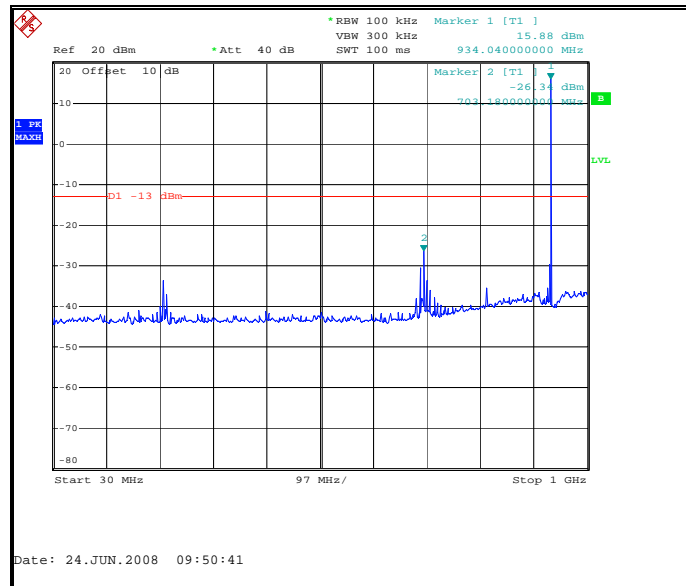

**Figure 7.3.2-1: Conducted Spurious Emissions – 932.25 MHz – 30MHz to 1GHz**

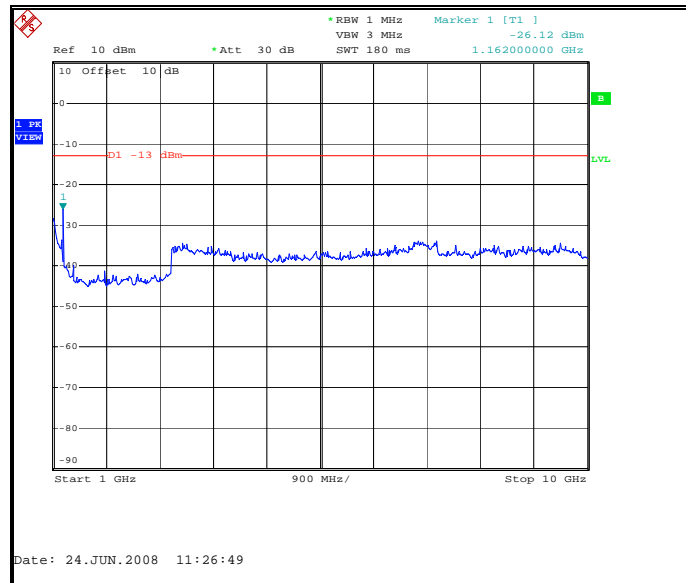

**Figure 7.3.2-2: Conducted Spurious Emissions – 932.25 MHz – 1GHz to 10GHz**



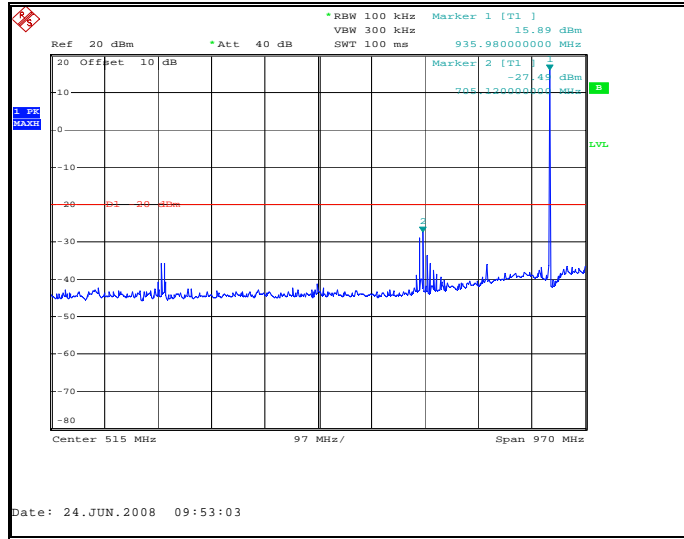


Figure 7.3.2-3: Conducted Spurious Emissions – 935.0125 MHz – 30MHz to 1GHz

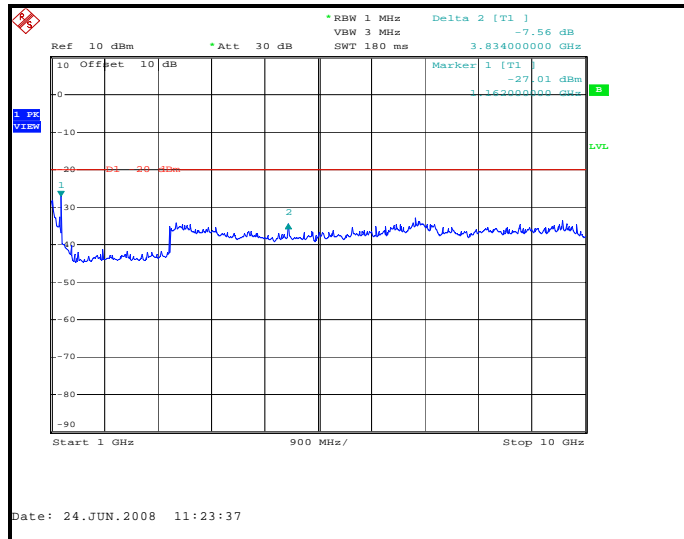


Figure 7.3.2-4: Conducted Spurious Emissions – 935.0125 MHz – 1GHz to 10GHz

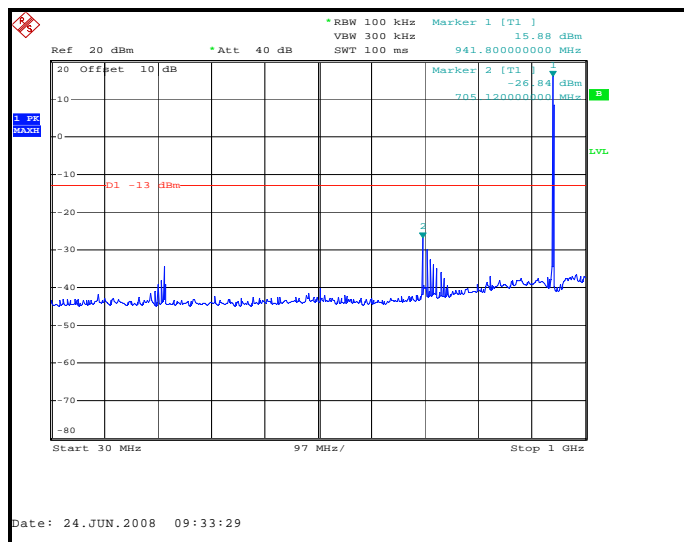


Figure 7.3.2-5: Conducted Spurious Emissions – 941.4875 MHz – 30MHz to 1GHz

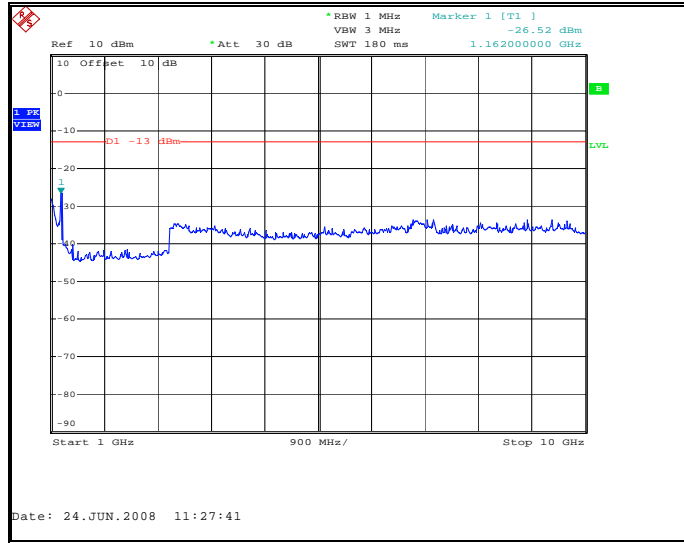


Figure 7.3.2-6: Conducted Spurious Emissions – 941.4875 MHz – 1GHz to 10GHz

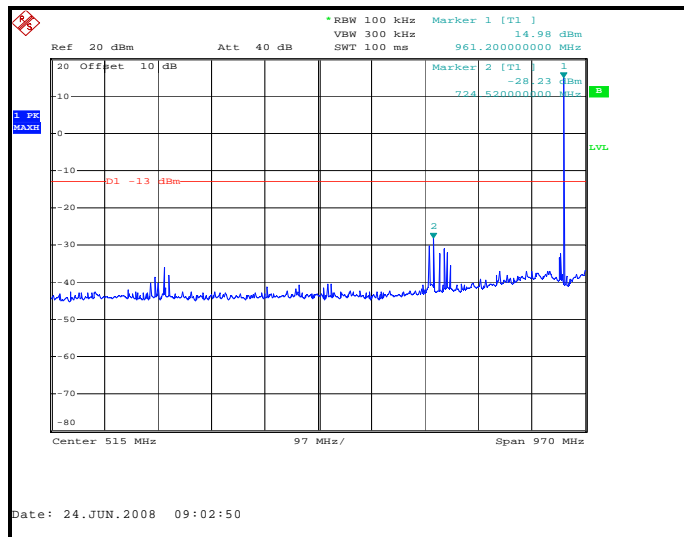


Figure 7.3.2-7: Conducted Spurious Emissions – 959.925 MHz – 30MHz to 1GHz

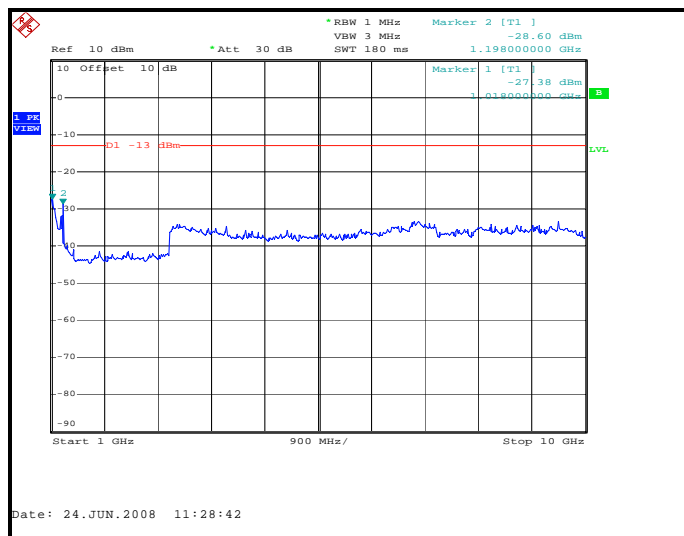


Figure 7.3.2-8: Conducted Spurious Emissions – 959.925 MHz – 1GHz to 10GHz

## 7.4 Field Strength of Spurious Emissions – Part 24.133(a)(1)(ii), (a)(2)(ii), Part 90.210(j), Part 101.111(a)(6) / RSS-119 5.8.8, 5.8.6, RSS-134 6.3(i)(ii)

### 7.4.1 Measurement Procedure

The equipment under test is placed in the Semi-Anechoic Chamber (described in section 2.3.1) on a wooden table at the turntable center. For each spurious emission, the antenna mast is raised and lowered from one (1) to four (4) meters and the turntable is rotated 360° and the maximum reading on the spectrum analyzer is recorded. This was repeated for both horizontal and vertical polarizations of the receive antenna.

The equipment under test is then replaced with a substitution antenna fed by a signal generator. The signal generator's frequency is set to that of the spurious emission recorded from the equipment under test. The antenna mast is raised and lowered from one (1) to four (4) meters to obtain a maximum reading on the spectrum analyzer. The output of the signal generator is then adjusted until the reading on the spectrum analyzer matches that obtained from the equipment under test. The signal generator level is recorded. The power in dBm of each spurious emission is calculated by correcting the signal generator level for the cable loss and gain of the substitution antenna referenced to a dipole. The spectrum was investigated up to 10 times the fundamental emission.

Data was collected at frequencies according to Section 1.3.2. Results of the test are shown below. The magnitude of all spurious emissions not reported were attenuated below the noise floor of the measurement system and therefore not specified in this report.

The equipment under test was evaluated to multiple FCC rule parts with the most stringent limit applied to all measurements.

Measurement results are shown below in Tables 7.4.2-1 through 7.4.2.4.

### 7.4.2 Measurement Results

**Table 7.4.2-1: Field Strength of Spurious Emissions – 932.25MHz**

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1864.5	-53.50	-54.00	H	5.04	-48.96	-20.00	28.96
1864.5	-53.09	-55	V	5.01	-49.99	-20.00	29.99
5593.5	-59.83	-56	H	6.83	-49.17	-20.00	29.17

Note: Frequencies not reported were below the noise floor of the measurement system.

**Table 7.4.2-2: Field Strength of Spurious Emissions – 935.0125MHz**

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1870.025	-55.34	-58.00	H	5.03	-52.97	-20.00	32.97
1870.025	-53.8	-56	V	5.00	-51.00	-20.00	31.00
5610.075	-59.48	-57	H	6.82	-50.18	-20.00	30.18

Note: Frequencies not reported were below the noise floor of the measurement system.

**Table 7.4.2-3: Field Strength of Spurious Emissions – 941.4875MHz**

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1882.975	-55.34	-57.00	H	5.00	-52.00	-20.00	32.00
1882.975	-52.71	-54	V	4.98	-49.02	-20.00	29.02
5648.925	-59.79	-57	H	6.80	-50.20	-20.00	30.20

Note: Frequencies not reported were below the noise floor of the measurement system.

**Table 7.4.2-4: Field Strength of Spurious Emissions – 959.925MHz**

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1919.85	-54.21	-54.00	H	4.93	-49.07	-20.00	29.07
1919.85	-52.34	-53	V	4.91	-48.09	-20.00	28.09

Note: Frequencies not reported were below the noise floor of the measurement system.

**7.5 Frequency Stability – Part 24.134, Part 90.213 (a), RSS-119 5.3, Part 101.107 (a), RSS-119 5.3, RSS-134 7.0**

**7.5.1 Measurement Procedure**

The equipment under test is placed inside an environmental chamber. The RF output is directly coupled to the input of the measurement equipment.

Frequency measurements were made at the extremes of the of temperature range -30° C to +50° C and at intervals of 10° C at normal supply voltage. A period of time sufficient to stabilize all components of the equipment was allowed at each frequency measurement. At a temperature 20° C the supply voltage to was varied from 85% to 115% from the normal. The maximum variation of frequency was recorded.

For the purpose of this test the EUT was connected to the DC Power Supply with a nominal voltage of 5vDC. The supply voltage was varied from 85% to 115% from the nominal.

The most stringent limit from all rule parts of 1ppm was applied to all channels evaluated.

Data was collected at frequencies according to Section 1.3.2. Results of the test are shown below in Figures 7.5.2-1 through 7.5.2-4.

7.5.2 Measurement Results

<b>Frequency Stability</b>				
		<b>Frequency (MHz):</b>	932.25	
		<b>Deviation Limit (PPM):</b>	1.0ppm	
Temperature	Frequency	Frequency Error	Voltage	Voltage
C	MHz	(PPM)	(%)	(VDC)
-30 C	932.250624	0.669	100%	5.00
-20 C	932.250297	0.319	100%	5.00
-10 C	932.250429	0.460	100%	5.00
0 C	932.250449	0.482	100%	5.00
10 C	932.250364	0.390	100%	5.00
20 C	932.250259	0.278	100%	5.00
30 C	932.250142	0.152	100%	5.00
40 C	932.250158	0.169	100%	5.00
50 C	932.250104	0.112	100%	5.00
20 C	932.250176	0.189	85%	4.250
20 C	932.250228	0.245	100%	5.750

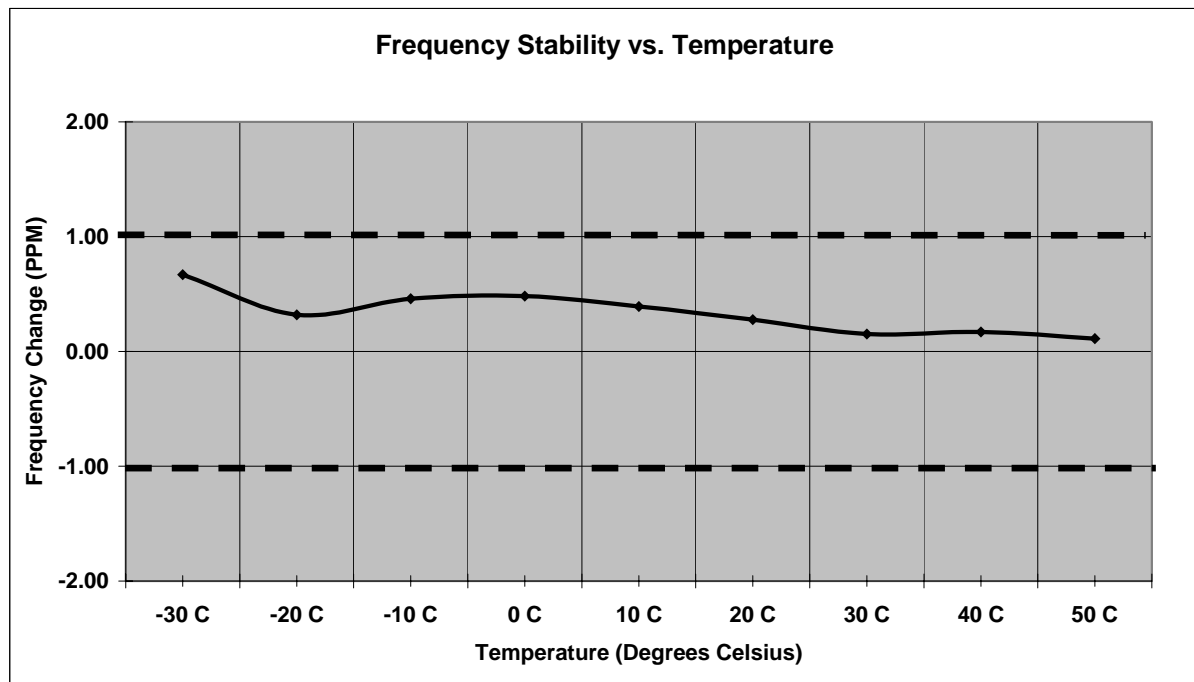


Figure 7.5.2-2: Frequency Stability – 932.25MHz

# Frequency Stability

Frequency (MHz): 935.0125  
 Deviation Limit (PPM): 1.0ppm

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	935.013133	0.677	100%	5.00
-20 C	935.012721	0.236	100%	5.00
-10 C	935.012946	0.477	100%	5.00
0 C	935.012946	0.477	100%	5.00
10 C	935.012873	0.399	100%	5.00
20 C	935.012761	0.279	100%	5.00
30 C	935.012636	0.145	100%	5.00
40 C	935.012642	0.152	100%	5.00
50 C	935.012576	0.081	100%	5.00
20 C	935.012728	0.244	85%	4.250
20 C	935.012720	0.235	100%	5.750

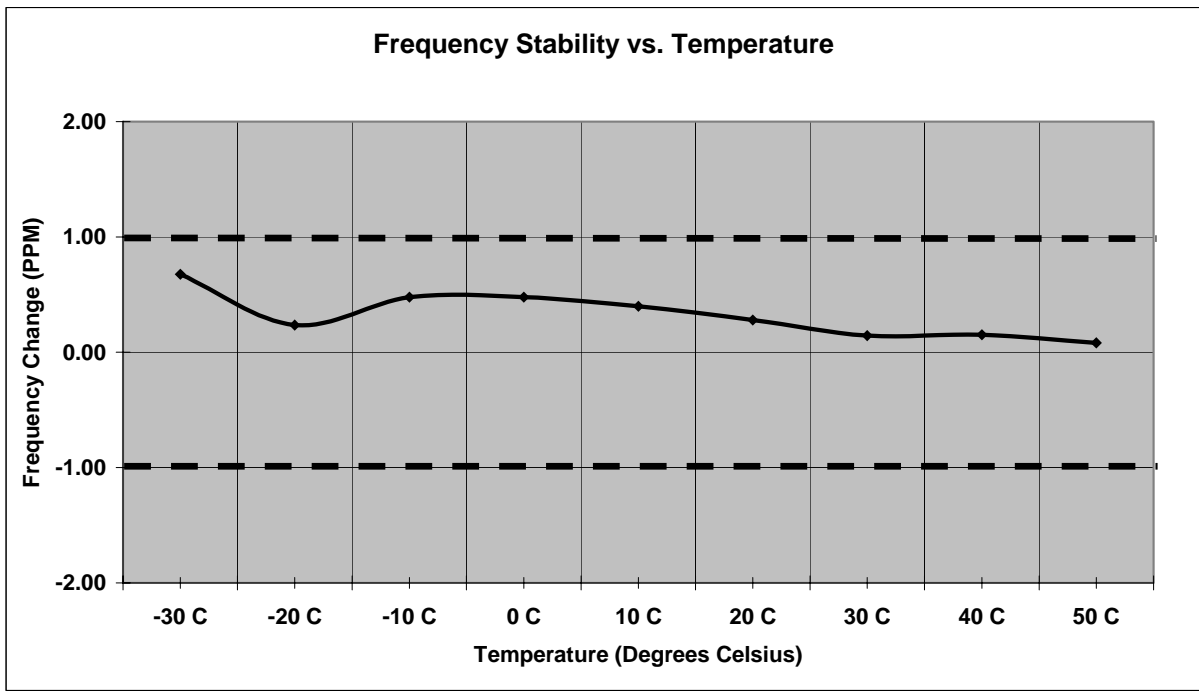


Figure 7.5.2-1: Frequency Stability – 935.0125MHz

# Frequency Stability

Frequency (MHz): 941.4875  
 Deviation Limit (PPM): 1.0ppm

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	941.488171	0.713	100%	5.00
-20 C	941.487823	0.343	100%	5.00
-10 C	941.487921	0.447	100%	5.00
0 C	941.487943	0.471	100%	5.00
10 C	941.487864	0.387	100%	5.00
20 C	941.487759	0.275	100%	5.00
30 C	941.487680	0.191	100%	5.00
40 C	941.487633	0.141	100%	5.00
50 C	941.487604	0.110	100%	5.00
20 C	941.487680	0.191	85%	4.250
20 C	941.487720	0.234	100%	5.750

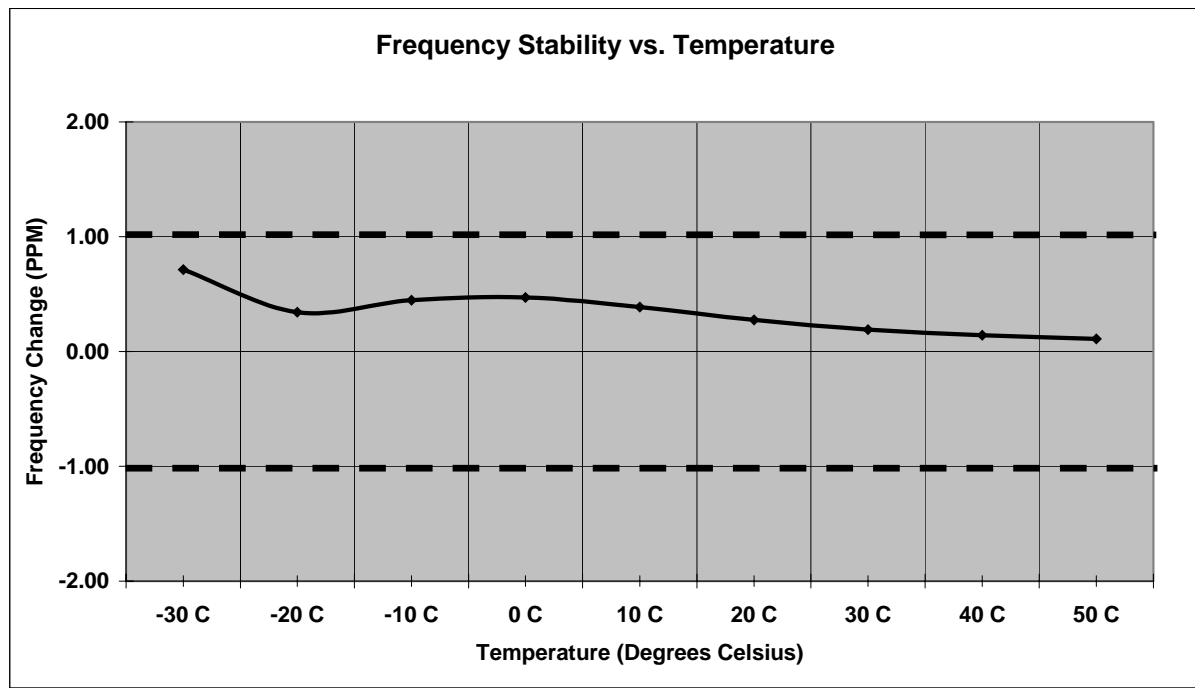


Figure 7.5.2-3: Frequency Stability – 941.4875MHz

# Frequency Stability

Frequency (MHz): 959.925  
 Deviation Limit (PPM): 1.0ppm

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	959.925513	0.534	100%	5.00
-20 C	959.925297	0.309	100%	5.00
-10 C	959.925430	0.448	100%	5.00
0 C	959.925465	0.484	100%	5.00
10 C	959.925465	0.484	100%	5.00
20 C	959.925199	0.207	100%	5.00
30 C	959.925123	0.128	100%	5.00
40 C	959.925130	0.135	100%	5.00
50 C	959.925120	0.125	100%	5.00
20 C	959.925171	0.178	85%	4.250
20 C	959.925212	0.221	100%	5.750

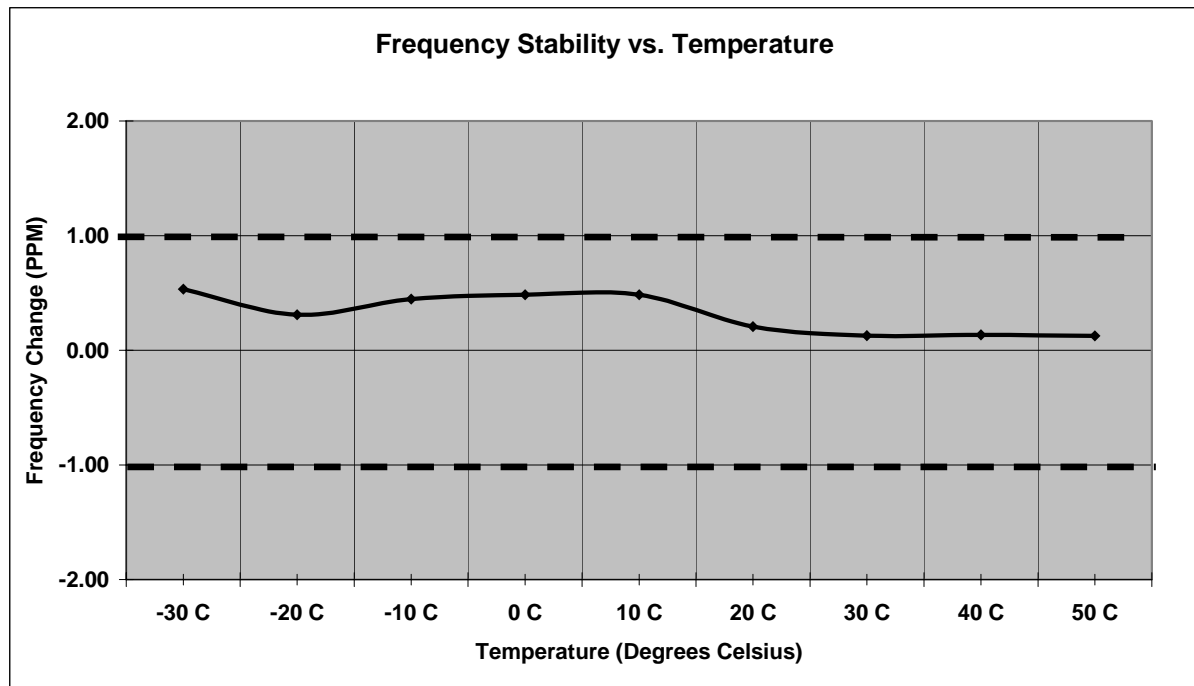


Figure 7.5.2-4: Frequency Stability – 959.925MHz



## 7.6 Radiated Emissions (Unintentional Radiators)

### 7.6.1 Measurement Procedure

The equipment under test is placed in the Semi-Anechoic Chamber (described in section 2.3.1) on a wooden table at the turntable center. For each radiated emission, the antenna mast is raised and lowered from one (1) to four (4) meters and the turntable is rotated 360° to obtain a maximum peak reading on the spectrum analyzer. The radiated emissions are then measured using an EMI receiver employing a CISPR quasi-peak detector for frequencies below 1000 MHz and an Average detector function for frequencies above 1000 MHz. This repeated for both horizontal and vertical polarizations of the receive antenna.

The field strength of each radiated emission is calculated by correcting the EMI receiver level for cable loss, amplifier gain, and antenna correction factors.

Field Strength (dBuV/m) = EMI Receiver Level (dBuV) + Cable Loss (dB) – Amplifier Gain (dB) + Antenna Correction Factor (1/m)

Results of the test are shown below in Table 7.6.2-1.

### 7.6.2 Measurement Results - Part 15.109, RSS-119 5.11, RSS-134 8(i)

**Table 7.6.2-1: Radiated Emissions Tabulated Data**

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
37.7326	-----	17.79	H	-8.91	-----	8.88	-----	40.0	-----	31.12
60.9871	-----	21.37	H	-18.60	-----	2.77	-----	40.0	-----	37.23
186.1604	-----	18.30	H	-14.08	-----	4.22	-----	43.5	-----	39.28
200.3707	-----	18.61	H	-13.00	-----	5.61	-----	43.5	-----	37.89
226.2206	-----	18.28	H	-12.56	-----	5.72	-----	46.0	-----	40.28
214.7028	-----	18.12	H	-12.95	-----	5.17	-----	43.5	-----	38.33
212.9144	-----	18.13	H	-12.93	-----	5.20	-----	43.5	-----	38.30
209.9358	-----	18.23	H	-12.90	-----	5.33	-----	43.5	-----	38.17

Measurements taken above 209.9358MHz were below the noise floor of the measurement equipment.

**7.7 Power Line Conducted Emissions**

**7.7.1 Measurement Procedure**

ANSI C63.4 sections 6 and 7 were the guiding documents for this evaluation. Conducted emissions were performed from 150kHz to 30MHz with the spectrum analyzer’s resolution bandwidth set to 9kHz and the video bandwidth set to 30kHz. The calculation for the conducted emissions is as follows:

Corrected Reading = Analyzer Reading + LISN Loss + Cable Loss  
 Margin = Applicable Limit - Corrected Reading

The HANXCVR01 module was integrated into a representative host device for the purpose of showing compliance. See section 6.0 for test setup details.

Measurement results are shown below in Table 7.7.2-1.

**7.7.2 Measurement Results – Part 15.107**

**Table 7.7.2-1: Conducted EMI Results**

Frequency (MHz)	Uncorrected Reading (dBuV)		Total Correction Factor (dB)	Corrected Level (dBuV)		Limit (dBuV)		Margin (dB)		Line
	Quasi-Peak	Average		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average	
<b>Line 1</b>										
0.18	32.9	32.7	9.80	42.70	42.50	64.49	54.49	21.8	12.0	GND
0.24	35.5	34.5	9.80	45.30	44.30	62.10	52.10	16.8	7.8	GND
0.29	30.5	30.1	9.80	40.30	39.90	60.52	50.52	20.2	10.6	GND
0.35	28.1	27.8	9.80	37.90	37.60	58.96	48.96	21.1	11.4	GND
0.41	28	27.6	9.80	37.80	37.40	57.65	47.65	19.8	10.2	GND
0.53	25	24.8	9.80	34.80	34.60	56.00	46.00	21.2	11.4	GND
<b>Line 2</b>										
0.18	32.6	32.5	9.80	42.40	42.30	64.49	54.49	22.1	12.2	GND
0.24	28.3	27.6	9.80	38.10	37.40	62.10	52.10	24.0	14.7	GND
0.29	29.8	29.7	9.80	39.60	39.50	60.52	50.52	20.9	11.0	GND
0.35	27.6	27.5	9.80	37.40	37.30	58.96	48.96	21.6	11.7	GND
0.41	26.8	26.6	9.80	36.60	36.40	57.65	47.65	21.0	11.2	GND
0.53	22.7	22.5	9.80	32.50	32.30	56.00	46.00	23.5	13.7	GND

**8.0 CONCLUSION**

In the opinion of ACS, Inc. the model HANXCVR01, manufactured by Sensus Metering Systems, meets all the requirements of FCC Part 24, 90, and 101 as well as IC RSS-119 and RSS-134 as applicable.

End Report