

FCC and ISED Canada Radio Testing of the

Sensus Metering Systems Inc.
M420 with M420 PA


In accordance with FCC 47 CFR Part 24 Subpart D, Part 101 Subpart C and ISED Canada's Radio Standards Specifications RSS-119, RSS-134

Prepared for: Sensus Metering Systems Inc.
639 Davis Drive
Morrisville, NC 27560

FCC ID: SDBM420V00
IC: 2220A-M420V00

COMMERCIAL-IN-CONFIDENCE

Document Number: TP72181297.700 | Version Number: 01

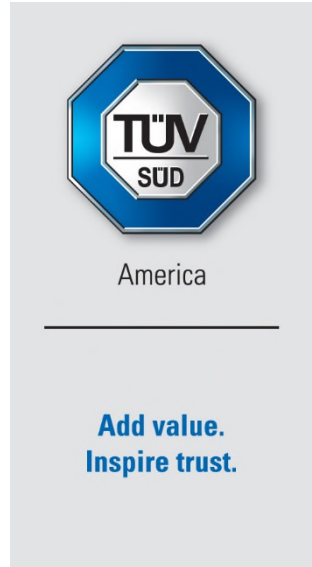

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Authorized Signatory	Peter Walsh	2022 -November-18	
Testing	Thierry Jean-Charles	2022-November-12	

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Product Service document control rules.

FCC Accreditation
Designation Number US1063 Tampa, FL Test Laboratory
Innovation, Science, and Economic Development Canada
Accreditation
Site Number 2087A-2 Tampa, FL Test Laboratory

EXECUTIVE SUMMARY
Samples of this product were tested and found to be in compliance with FCC Part 24 Subpart D, Part 101 Subpart C and ISED Canada's RSS-119, RSS-134.

 A2LA Cert. No. 2955.15	DISCLAIMER AND COPYRIGHT This non-binding report has been prepared by TÜV SÜD America with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD America. No part of this document may be reproduced without the prior written approval of TÜV SÜD America. © TÜV SÜD.
	DISCLAIMER AND COPYRIGHT Our A2LA Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our A2LA Accreditation. Results of test not covered by our A2LA Accreditation Schedule are marked NUA (Not A2LA Accredited).

TÜV SÜD America
5610 West Sligh Ave., Suite 100
Tampa, FL 33634

Phone: 813-284-2715
www.tuv-sud-america.com



Contents

1	Report Summary	3
1.1	Report Modification Record.....	3
1.2	Introduction.....	3
1.3	Brief Summary of Results	5
1.4	Product Information	6
1.5	Deviations from the Standard.....	10
1.6	EUT Modification Record	11
1.7	Test Location	11
2	Test Details	12
2.1	RF Power Output.....	12
2.2	Out of Band Unwanted Emissions	21
2.3	Occupied Bandwidth	47
2.4	Spurious Emissions at Antenna Terminals	70
2.5	Field Strength of Spurious Radiation	77
2.6	Frequency Stability.....	91
3	Test Equipment Information	103
3.1	General Test Equipment Used.....	103
4	Diagram of Test Set-ups	105
5	Measurement Uncertainty	108
6	Accreditation, Disclaimers and Copyright.....	109



1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	2022-November-18

1.2 Introduction

The purpose of this report is to demonstrate compliance with the FCC's Code of Federal Regulations Part 24 Subpart D, Part 101 Subpart C and Innovation Science and Economic Development Canada's Radio Standards Specification RSS-119, RSS-134 for the tests documented herein.



Applicant	Sensus Metering Systems Inc.
Manufacturer	Sensus Metering Systems Inc.
Applicant's Email Address	james.francisco@xyleminc.com
Model Number(s)	M420 with M420 PA
Serial Number(s)	M420, SN: 1953335308 M420 PA, SN:420-48
FCC ID	SDBM420V00
ISED Certification Number	2220A-M420V00
Hardware Version(s)	Rev E
Software Version(s)	OS: 3.0.0, RF: V0.1 Beta
Number of Samples Tested	1
Test Specification/Issue/Date	US Code of Federal Regulations (CFR): Title 47, Part 24, Subpart D: Personal Communications Services – 2021 US Code of Federal Regulations (CFR): Title 47, Part 101, Subpart C: Fixed Microwave Services -2012 Industry Canada Radio Standards Specification: RSS-119 - Land Mobile and Fixed Equipment Operating in the Frequency Range 27.41-960 MHz, Issue 12, May 2015 Industry Canada Radio Standards Specification: RSS-134 - 900 MHz Narrowband Personal Communication Service, Issue 2, February 2016
Test Plan/Issue/Date	2022-June-24
Order Number	72181297
Date	2022-June-29
Date of Receipt of EUT	2022-August-05
Start of Test	2022-August-05
Finish of Test	2022-September-26
Name of Engineer(s)	Thierry Jean-Charles
Related Document(s)	US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures - 2021 Innovation, Science and Economic Development Canada Radio Standards Specification: RSS-GEN - General Requirements for Compliance of Radio Apparatus, Issue 5, Amendment 1, March 2019 ANSI C63.26: 2015: American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services.



1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with 24 Subpart D, Part 101 Subpart C and ISED Canada's RSS-119, RSS-134 is shown below.

Table 1.3-1: Test Result Summary

Test Parameter	Test Plan (Yes/No)	Test Results	FCC 47 CFR Rule Part	ISED Canada's RSS	Test Report Page No.
RF Power Output	Yes	Pass	2.1046; 24.132; 101.113(a)	RSS-Gen 6.12; RSS-119 5.4; RSS-134 4.3(a), (b)	12
Out of Band Unwanted Emissions	Yes	Pass	2.1053; 24.133 a(1), a(2); 101.111 a(6)	RSS-Gen 6.13; RSS-119 5.8.6; RSS-134 4.4	21
Occupied Bandwidth	Yes	Pass	2.1049; 101.109	RSS-Gen 6.7	47
Spurious Emissions at Antenna Terminals	Yes	Pass	2.1053; 24.133 a(1), a(2); 101.111 a(6)	RSS-Gen 6.13; RSS-119 5.8.6; RSS-134 4.4	70
Field Strength of Spurious Radiation	Yes	Pass	2.1053; 24.133 a(1), a(2); 101.111a(6)	RSS-Gen 6.13; RSS-119 5.8.6; RSS-134 4.4	77
Frequency Stability	Yes	Pass	2.1055; 24.135; 101.107	RSS-Gen 6.11; RSS-119 5.3; RSS-134 4.5	91



1.4 Product Information

1.4.1 Technical Description

The equipment under test was the M420 Base station. The M420 base station product is a transceiver and power amplifier combination that can either be utilized in a 3U 19"rackmount configuration or a single unit in a pole mount cabinet. The 19"rackmount unit can have either a single or dual combined transceiver and PA. The M420 transceiver is designed to be used with either the M420 PA or the M400G2 PA. Both PA options have power control options. The test report documents the compliance of the M420 base station single unit with the M420 PA.

Technical Details

Mode of Operation: Flexnet Radio
 Frequency Range: 930 - 960 MHz
 Antenna Type/Gain: Panel, 20.1 dBi
 Omni, 12.1 dBi
 Input Power: 24 VDC

The M420 transmitters produce 4 distinct modulation formats. The emissions designators for the modulation types used by the M420 transmitters are as follows:

EMISSIONS DESIGNATORS:

mPass: 5K90F1D
 mPass2: 11K8F1D
 m4Pass: 8K75F1D
 m4Pass2: 17K5F1D

A full description and detailed product specification details are available from the manufacturer.

Table 1.4.1-1 – Cable Descriptions

Cable/Port	Description
Coaxial Cable, SMA to TNC	1.1 m, Shielded, M420 to GPS Antenna
8 wire Alarm / RJ45	1.5 m, Shielded, M420 to Terminal Bock.
Ethernet / RJ45	2 m, Shielded, M420 to Ethernet Switch
Twisted Pair Power	1.85m, Not Shielded, DC Power Supply to M420
DSUB	0.25 m, Shielded, M420 to M420 PA
Coaxial, SMA to N-Type	1.2 m, Shielded, M420 to Load
Power	1.9 m, Not Shielded, AC Adapter to Ethernet Switch
Semi-rigid Coaxial, SMA	0.27 m, Shielded, M420 to M420 PA
Coaxial, SMA to N-Type	0.2 m, Shielded, M420 to Load



Table 1.4.1-2 – Support Equipment Descriptions

Make/Model	Description
Trimble / 57860-00	GPS Antenna, S/N: 2891102012
Lineage Power / J2007003 L102 (CC109163184)	22-29 VDC Power Supply, S/N: 10KZ47016361
Netgear / GS105	ProSAFE Gigabit Ethernet Switch, S/N: 3TL1525K09AFC
Netgear /AD2015F23	12VDC AC-DC Adapter, S/N: 31150531Y1070201L9
Narda /376BNF	40-Watt Termination
Mini-Circuits / BW-40N100W+	100-Watt Attenuator, 40 dB
Alan Industries / 50LH10	10-Watt Termination



Declaration of Build Status

EQUIPMENT DESCRIPTION	
Model Name/Number	M420 with M420 PA
Part Number	96015276
Hardware Version	Rev E
Software Version	OS: 3.0.0, RF: V0.1 Beta
FCC ID (if applicable)	SDBM420V00
ISED ID (if applicable)	2220A-M420V00
Technical Description (Please provide a brief description of the intended use of the equipment)	The M420 is a base station transceiver with a M420 PA module.

UN-INTENTIONAL RADIATOR	
Highest frequency generated or used in the device or on which the device operates or tunes	2GHz
Lowest frequency generated or used in the device or on which the device operates or tunes	32.768kHz
Class A Digital Device (Use in commercial, industrial or business environment) <input type="checkbox"/>	

Power Source			
AC	Single Phase	Three Phase	Nominal Voltage
	<input type="checkbox"/>	<input type="checkbox"/>	
External DC	Nominal Voltage		Maximum Current
	24VDC		7A
Battery	Nominal Voltage		Battery Operating End Point Voltage

EXTREME CONDITIONS			
Maximum temperature	+70	°C	Minimum temperature
			-40 °C

Ancillaries
Please list all ancillaries which will be used with the device.
External PA: M420 PA, PN:96015180

I hereby declare that the information supplied is correct and complete.

Name: James Francisco

Position held: Sr. Regulatory Compliance Engineer

Date: 10/25/2022



1.4.2 Modes of Operation

The tested mode of operation was for the EUT configured with the M420 PA. The EUT was evaluated for the lowest and highest TX output power configurations. The EUT was configured using a terminal emulator.

1.4.3 Monitoring of Performance

The following performance attributes were monitored during the evaluation.

1. Transmitter Output Power
2. Transmitter Emissions Masks
3. Transmitter Occupied Bandwidth
4. Transmitter Spurious Emissions at the Antenna Port
5. Transmitter Radiated Spurious Emissions
6. Transmitter Frequency Stability over Temperature and Voltage

The EUT is designed to operate in multiple bands under the requirements of CFR 47 Parts 24 and 101. The following is a list of the frequency bands of operation sorted based on the FCC rule parts in which the band is associated.

CFR Title 47 Rule Part	ISED Canada RSS	Frequency Band of Operation (MHz)
24D	134	930.0 - 931.0
24D	134	940.0 - 941.0
101	119	941.0 - 941.5
101	119	952.0 – 953.0
101	N/A	959.85 - 960.0



Based on the requirements set forth in accordance 47 CFR 2.1046-2.1057 as stated above, the methodology in selecting the places to test in the available bands of operation is outlined in the following table.

CFR Title 47 Rule Part	ISED Canada RSS	Frequency Band of Operation (MHz)	Location in the Range of Operation	Approx. Test Freq.
24D	134	930.0 - 931.0	Middle	930.5000
24D	134	940.0 - 941.0	1 near top and 1 near bottom	940.0125
101	119	941.0 - 941.5		941.4875
101	119	952.0 – 953.0	Middle	952.5000
101	N/A	959.85 – 960.0	Middle	959.9250

1.4.4 Performance Criteria

The parameters evaluated are summarized below.

Table 1.4.4-1: Performance Criteria

Parameter	Requirement
RF Output Power	FCC 47 CFR Part 2.1046; 24.132; 101.113(a) ISED Canada RSS-119 5.4; RSS-134 4.3(a),(b)
Out-of-Band Unwanted Emissions	FCC 47 CFR Parts: 2.1053; 24.133 a(1), a(2); 101.111 a(6) ISED Canada RSS-119 5.8.6; RSS-134 4.4
Occupied Bandwidth	ISED Canada RSS-GEN 6.7
Unwanted Emissions at the Antenna Terminal	FCC 47 CFR Parts: 2.1053; 24.133 a(1), a(2); 101.111 a(6) ISED Canada RSS-119 5.8.6; RSS-134 4.4
Radiated Spurious Emissions	FCC 47 CFR Parts: 2.1053; 24.133 a(1), a(2); 101.111 a(6) ISED Canada RSS-119 5.8.6; RSS-134 4.4
Frequency Stability	FCC Parts: 2.1055; 24.135 ISED Canada RSS-134 4.5

1.5 Deviations from the Standard

No deviations from the applicable test standard were made during testing.



1.6 EUT Modification Record

The table below details modifications made to the EUT during the test program. The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
1	DSUB Cable with metal housing on each connector end.	Sensus	2022-August-31
2	Fabric-over-Foam (FoF) Gasket on the Power Amplifier Assembly	Sensus	2022-September-02

1.7 Test Location

TÜV SÜD Product Service conducted the following tests at our Tampa FL Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
DC Powered Operating		
RF Power Output	Thierry Jean-Charles	A2LA
Out of Band Emissions	Thierry Jean-Charles	A2LA
Occupied Bandwidth	Thierry Jean-Charles	A2LA
Spurious Emissions at the Antenna Terminal	Thierry Jean-Charles	A2LA
Field Strength of Spurious Radiation	Thierry Jean-Charles	A2LA
Frequency Stability	Thierry Jean-Charles	A2LA

Office Address:

TÜV SÜD America, Inc.
 5610 W. Sligh Ave, Suite 100
 Tampa, FL 33634
 USA



2 Test Details

2.1 RF Power Output

2.1.1 Specification Reference

FCC 47 CFR Part 2.1046; 24.132; 101.113(a)
ISED Canada RSS-119 5.4; RSS-134 4.3(a),(b)

2.1.2 Equipment Under Test and Modification State

M420, SN: 1953335308
M420 PA, SN:420-48

2.1.3 Date of Test

2022-August-15

2.1.4 Test Method

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer through 50 dB of passive attenuation. The resolution and video bandwidths of the spectrum analyzer were set at sufficient levels, >> signal bandwidth.

2.1.5 Environmental Conditions

Ambient Temperature	22.7 °C
Relative Humidity	51 %
Atmospheric Pressure	1013 mbar



2.1.6 Test Results

FCC 47 CFR Part 24.132; ISED Canada RSS-134 4.3

High Power Mode

Table 2.1.6-1: RF Output Power – High Power

Frequency MHz	Power (dBm)	Power (W)
930.5	47.62	57.81
940.0125	48.19	65.92

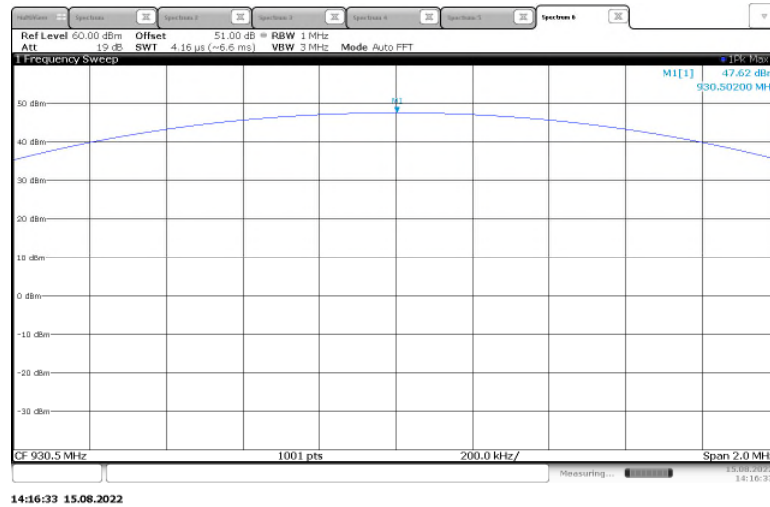


Figure 2.1.6-1: RF Output Power – 930.5 MHz – High Power

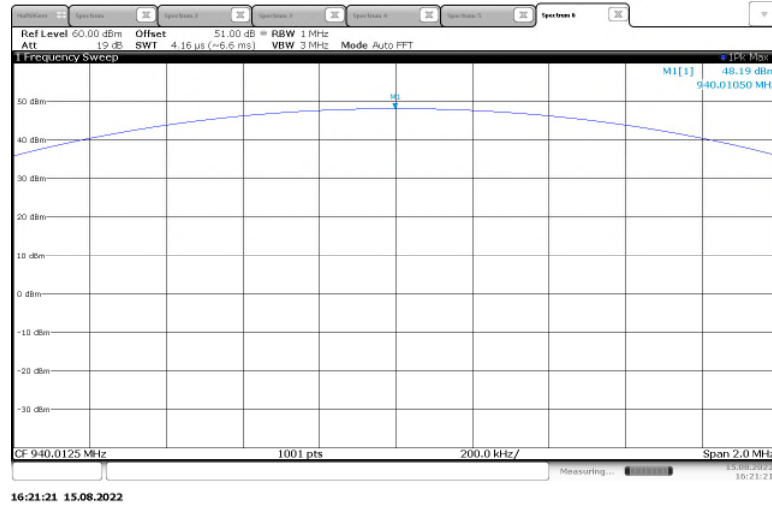


Figure 2.1.6-2: RF Output Power – 940.0125 MHz – High Power

Low Power Mode

Table 2.1.6-2: RF Output Power – Low Power

Frequency MHz	Power (dBm)	Power (W)
930.5	28.38	0.69
940.0125	28.99	0.79

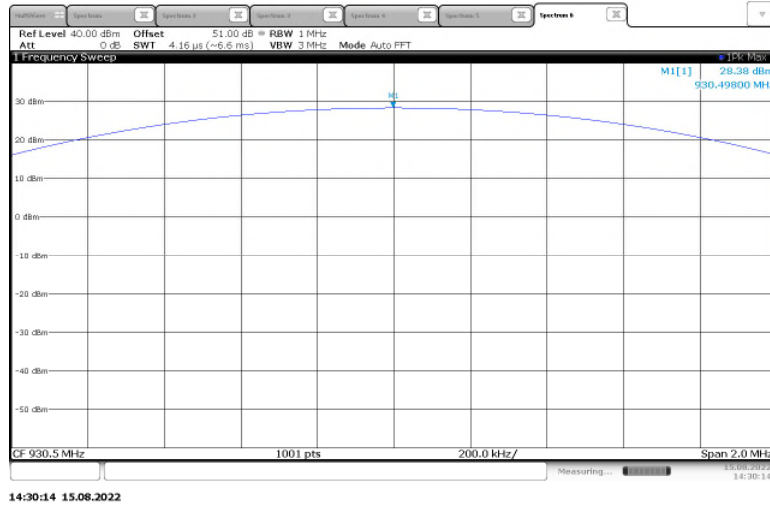


Figure 2.1.6-3: RF Output Power – 930.5 MHz – Low Power

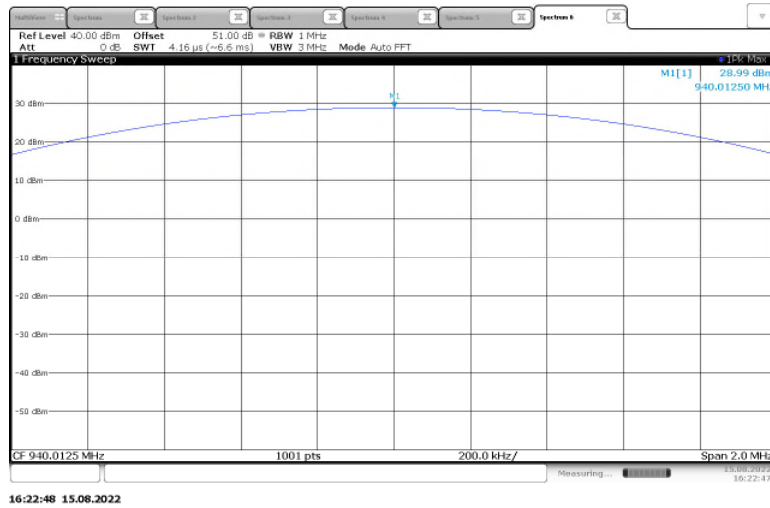


Figure 2.1.6-4: RF Output Power – 940.0125 MHz – Low Power



FCC 47 CFR Part 101.113(a); ISED Canada RSS-119 5.4

High Power Mode

Table 2.1.6-3: RF Output Power – High Power

Frequency MHz	Power (dBm)	Power (W)
941.4875	48.07	64.12
952.5	47.96	62.52
959.925	48.03	63.53

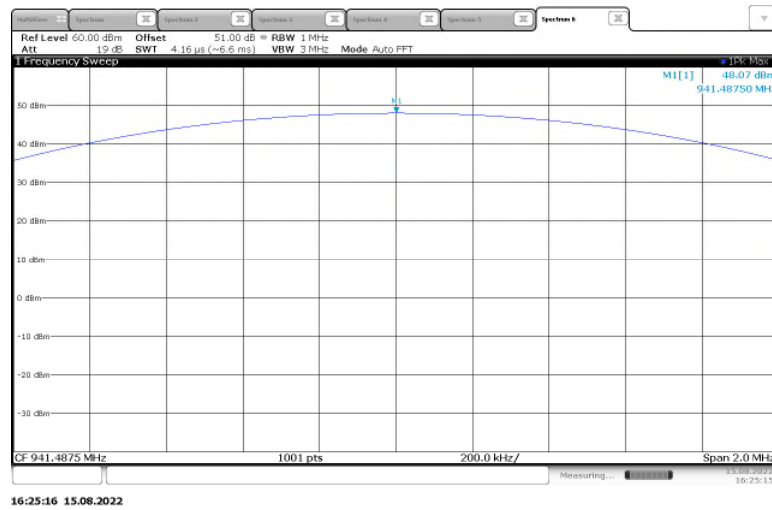


Figure 2.1.6-5: RF Output Power – 941.4875 MHz – High Power

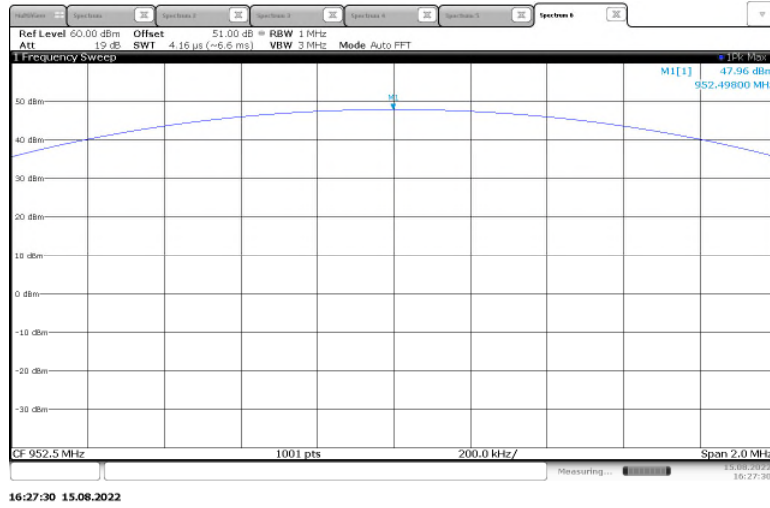


Figure 2.1.6-6: RF Output Power – 952.5 MHz – High Power

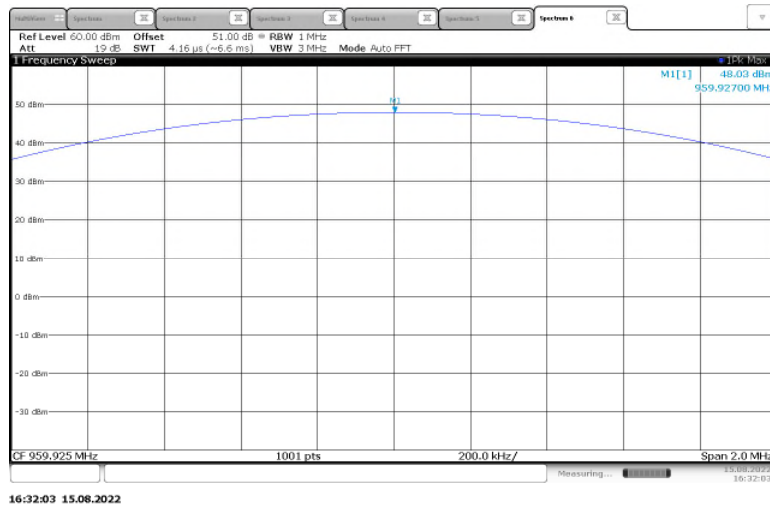


Figure 2.1.6-7: RF Output Power – 959.925 MHz – High Power



Low Power Mode

Table 2.1.6-4: RF Output Power – Low Power

Frequency MHz	Power (dBm)	Power (W)
941.4875	28.94	0.78
952.5	28.62	0.73
959.925	28.71	0.74

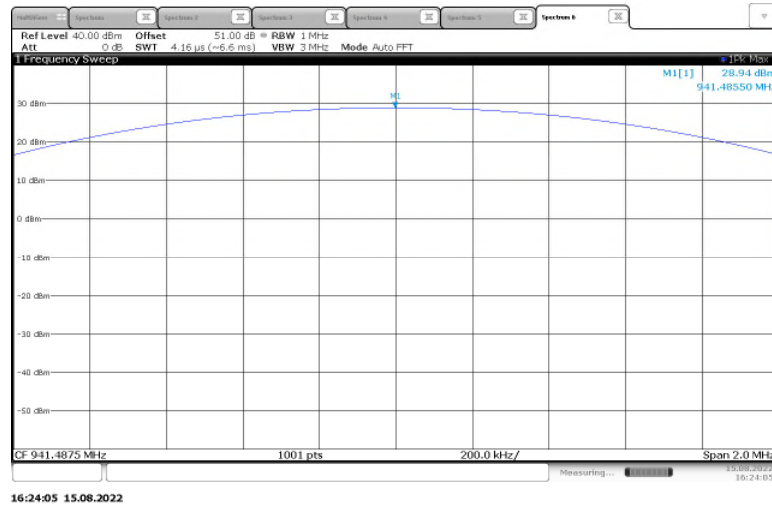


Figure 2.1.6-8: RF Output Power – 941.4875 MHz – Low Power

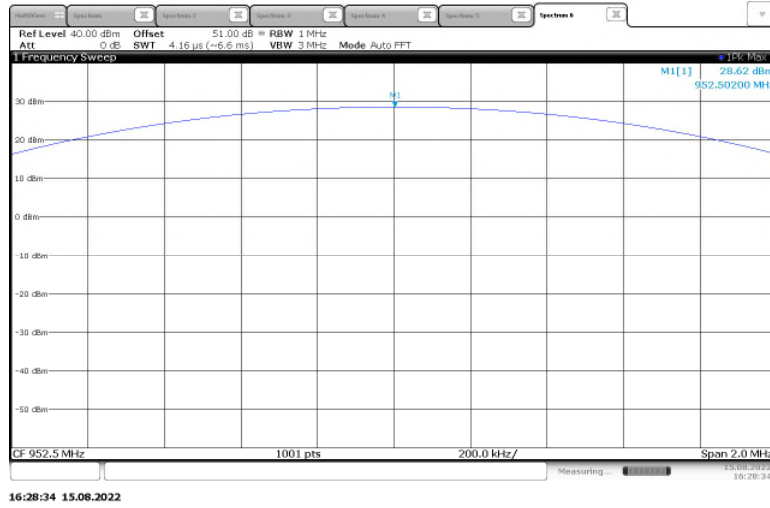


Figure 2.1.6-9: RF Output Power – 952.5 MHz – Low Power

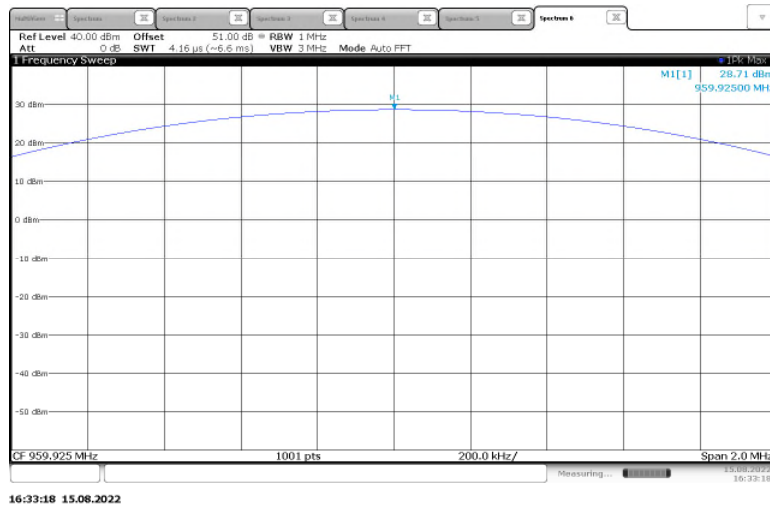


Figure 2.1.6-10: RF Output Power – 959.925 MHz – Low Power



2.1.7 Test Location and Test Equipment Used

This test was carried out in TÜV SÜD America, Inc., 5610 W. Sligh Ave, Suite 100, Tampa, FL 33634, USA.

Instrument	Manufacturer	Type No	TE No	Software / Firmware Revision	Calibration Period (months)	Calibration Due
50ohms M/F 4GHz, 100W Attenuator	Fairview Microwave Inc.	SA4N100-20	615	N/A	12	25-Mar-2023
Duratest High Frequency Cable 26.5GHz	Teledyne Storm Products	921-0101-036	BEMC02112	N/A	12	20-Oct-2022
Atten 30dB N-M/F, DC, 18 GHz, 10W	Aeroflex Inmet	18N10W-30	DEMC3041	N/A	12	15-Jul-2023
Signal & Spectrum Analyzer	Rohde & Schwarz	FSW43	DEMC3085	2.90 SP1	12	07-Jun-2023

TU - Traceability Unscheduled

O/P MON - Traceability Unscheduled

N/A - Not Applicable

NCR – No Calibration Required



2.2 Out of Band Unwanted Emissions

2.2.1 Specification Reference

FCC 47 CFR Parts: 2.1053; 24.133 a(1), a(2); 101.111 a(6)
ISED Canada RSS-119 5.8.6; RSS-134 4.4

2.2.2 Equipment Under Test and Modification State

M420, SN: 1953335308
M420 PA, SN:420-48

2.2.3 Date of Test

2022-September-14 to 2022-September-19

2.2.4 Test Method

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer through a 20 dB passive attenuator. The spectrum analyzer resolution and video bandwidths were set to 300 Hz and 3000 Hz, respectively. The internal correction factors of the spectrum analyzer were employed to correct for any cable or attenuator losses. Results of the test are shown below for all modes of operation.

2.2.5 Environmental Conditions

Ambient Temperature	21.8 °C
Relative Humidity	50 %
Atmospheric Pressure	1011 mbar



2.2.6 Test Results

DC Powered Operating

FCC 47 CFR Parts: 2.1053; 24.133 a(1), a(2); ISED Canada RSS-134 4.4

High Power Mode

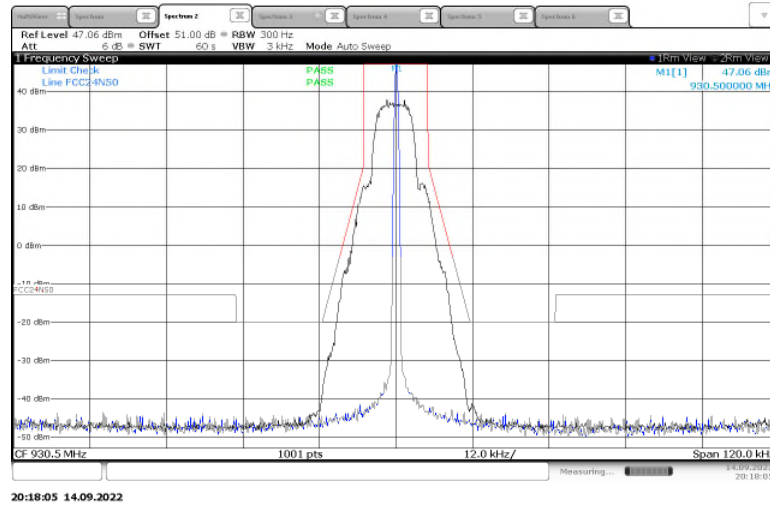


Figure 2.2.6-1: Emissions Mask – 930.5 MHz - 12.5 kHz Channel Spacing - mPass Mode – High Power

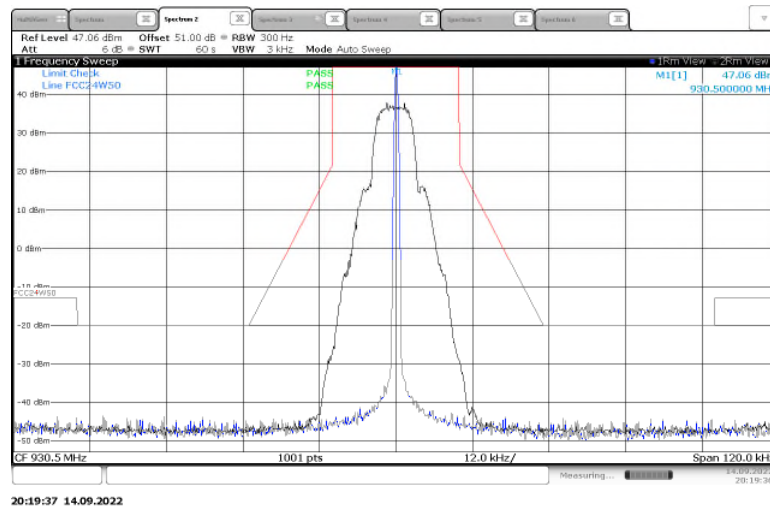


Figure 2.2.6-2: Emissions Mask – 930.5 MHz - 25 kHz Channel Spacing- mPass Mode – High Power

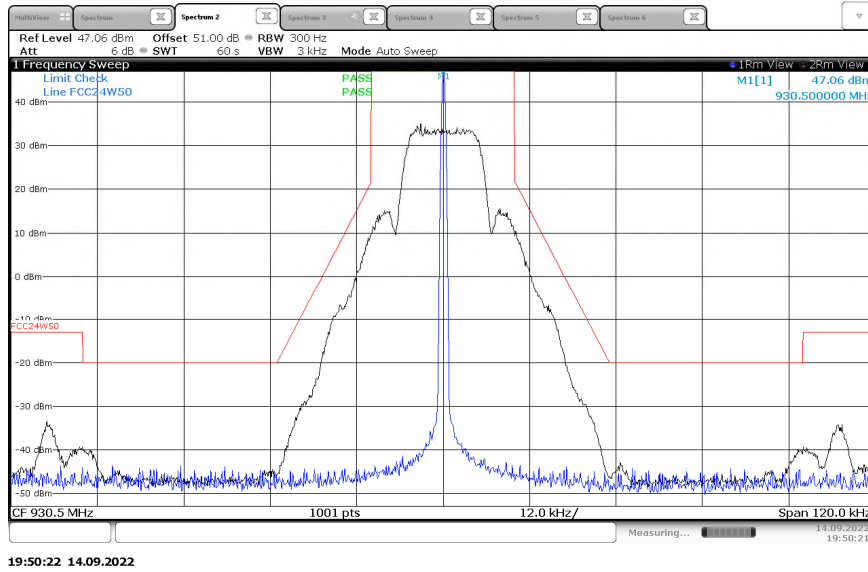


Figure 2.2.6-3: Emissions Mask – 930.5 MHz - 25 kHz Channel Spacing- mPass2 Mode – High Power

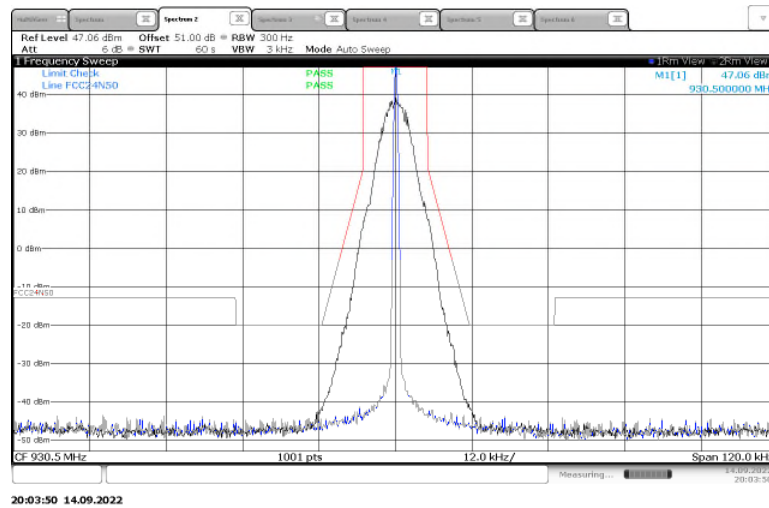


Figure 2.2.6-4: Emissions Mask – 930.5 MHz - 12.5 kHz Channel Spacing - m4Pass Mode – High Power

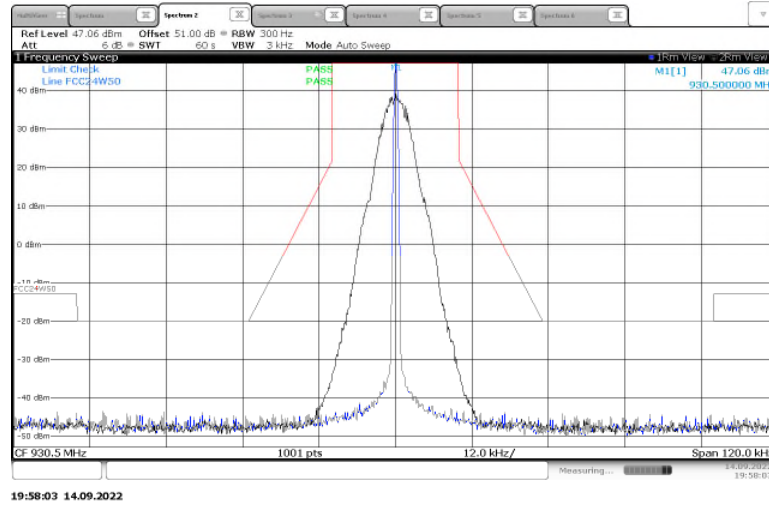


Figure 2.2.6-5: Emissions Mask – 930.5 MHz - 25 kHz Channel Spacing- m4Pass Mode – High Power

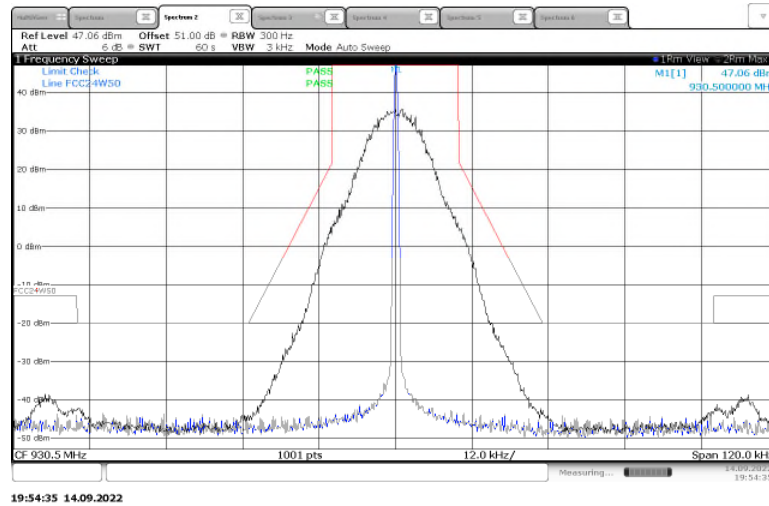


Figure 2.2.6-6: Emissions Mask – 930.5 MHz - 25 kHz Channel Spacing- m4Pass2 Mode – High Power

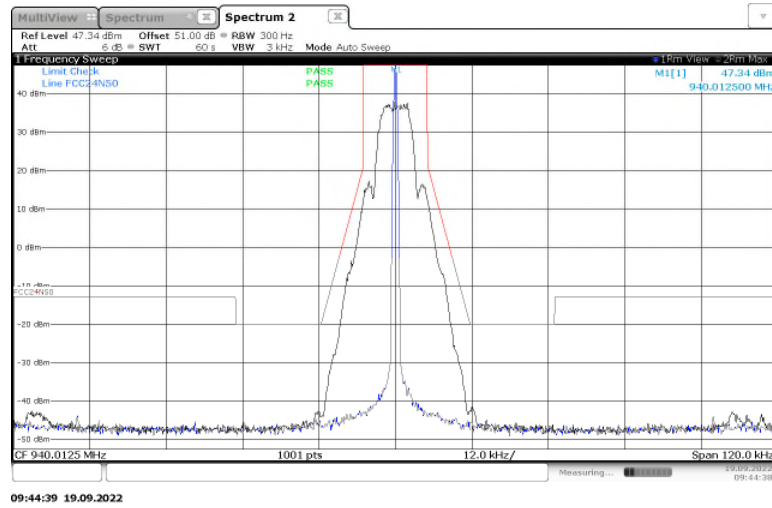


Figure 2.2.6-7: Emissions Mask – 940.0125 MHz - 12.5 kHz Channel Spacing - mPass Mode – High Power

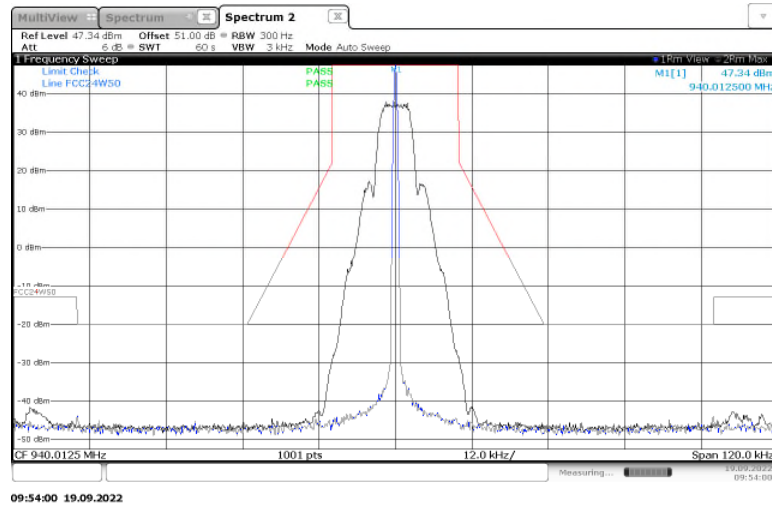


Figure 2.2.6-8: Emissions Mask – 940.0125 MHz - 25 kHz Channel Spacing- mPass Mode – High Power

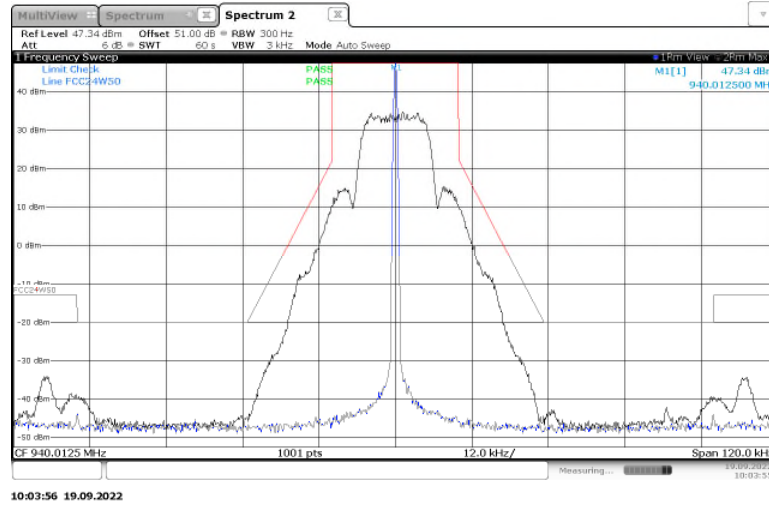


Figure 2.2.6-9: Emissions Mask – 940.0125 MHz - 25 kHz Channel Spacing- mPass2 Mode – High Power

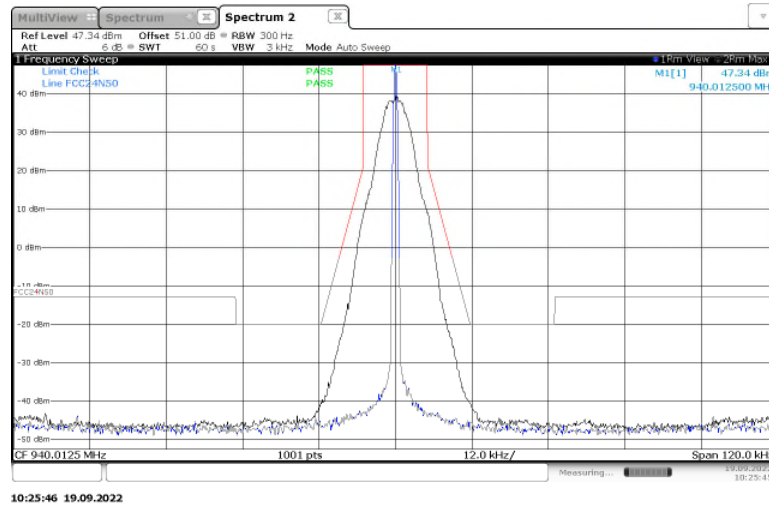


Figure 2.2.6-10: Emissions Mask – 940.0125 MHz - 12.5 kHz Channel Spacing - m4Pass Mode – High Power

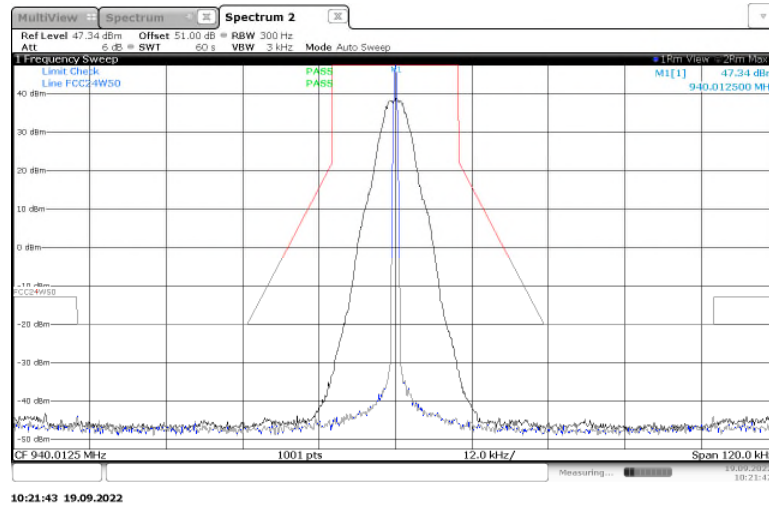


Figure 2.2.6-11: Emissions Mask – 940.0125 MHz - 25 kHz Channel Spacing- m4Pass Mode – High Power

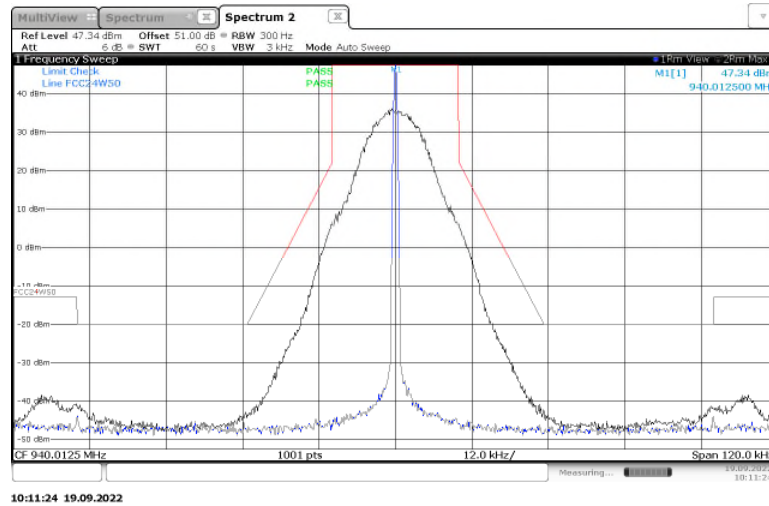


Figure 2.2.6-12: Emissions Mask – 940.0125 MHz - 25 kHz Channel Spacing- m4Pass2 Mode – High Power



Low Power Mode

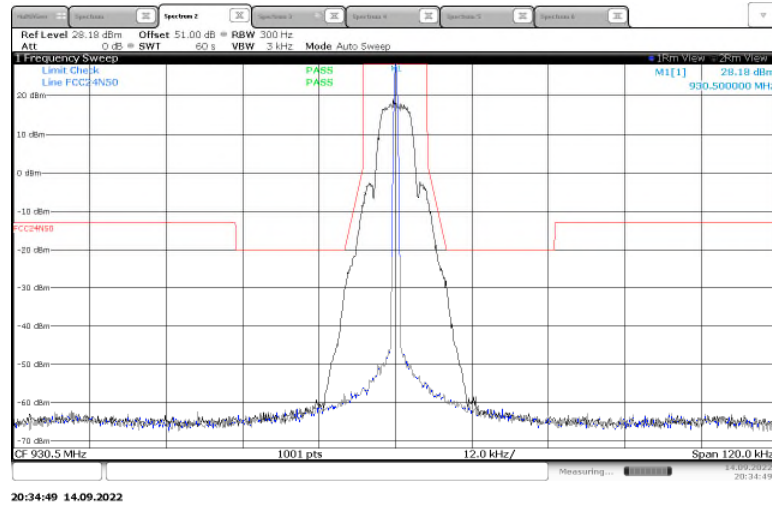


Figure 2.2.6-13: Emissions Mask – 930.5 MHz - 12.5 kHz Channel Spacing - mPass Mode – Low Power

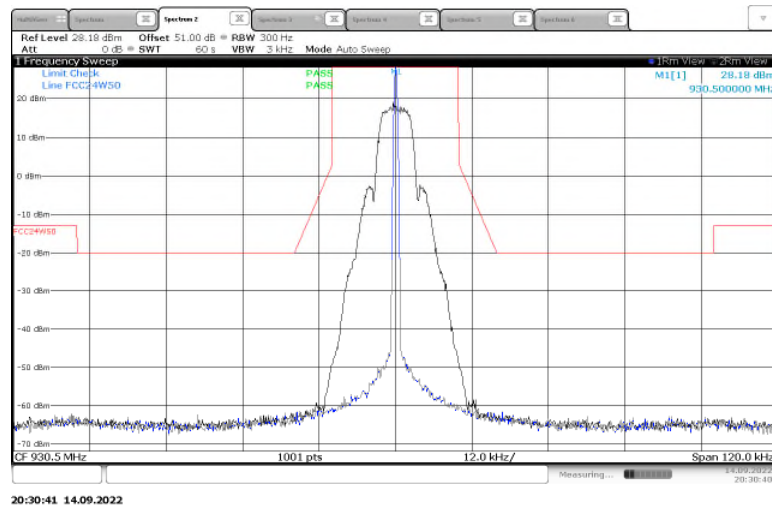


Figure 2.2.6-14: Emissions Mask – 930.5 MHz - 25 kHz Channel Spacing- mPass Mode – Low Power

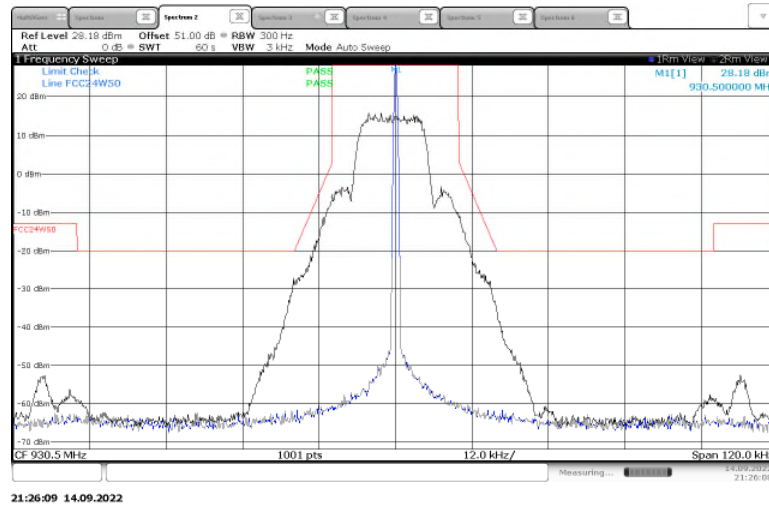


Figure 2.2.6-15: Emissions Mask – 930.5 MHz - 25 kHz Channel Spacing- mPass2 Mode – Low Power

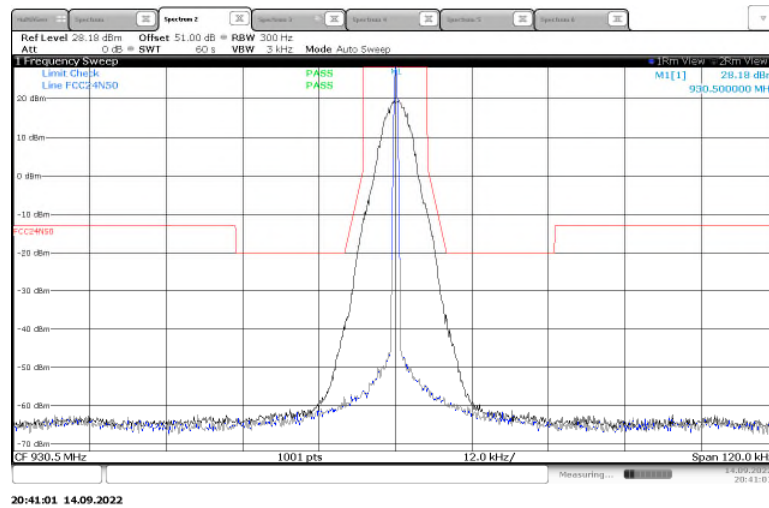


Figure 2.2.6-16: Emissions Mask – 930.5 MHz - 12.5 kHz Channel Spacing - m4Pass Mode – Low Power

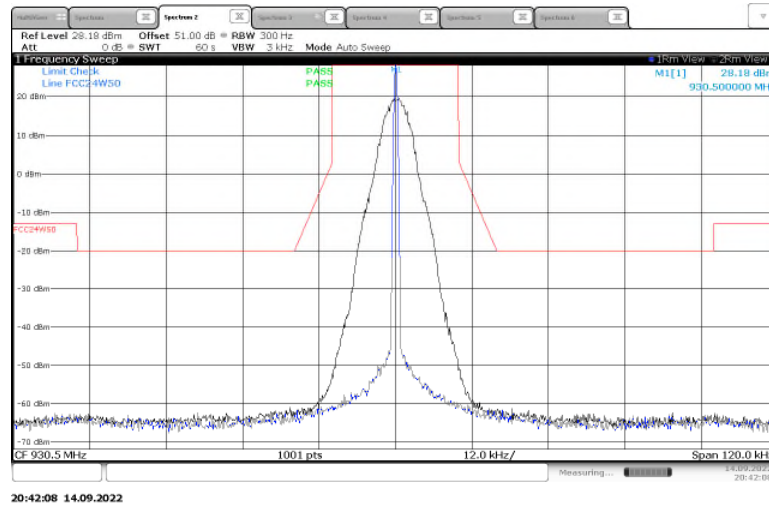


Figure 2.2.6-17: Emissions Mask – 930.5 MHz - 25 kHz Channel Spacing- m4Pass Mode – Low Power

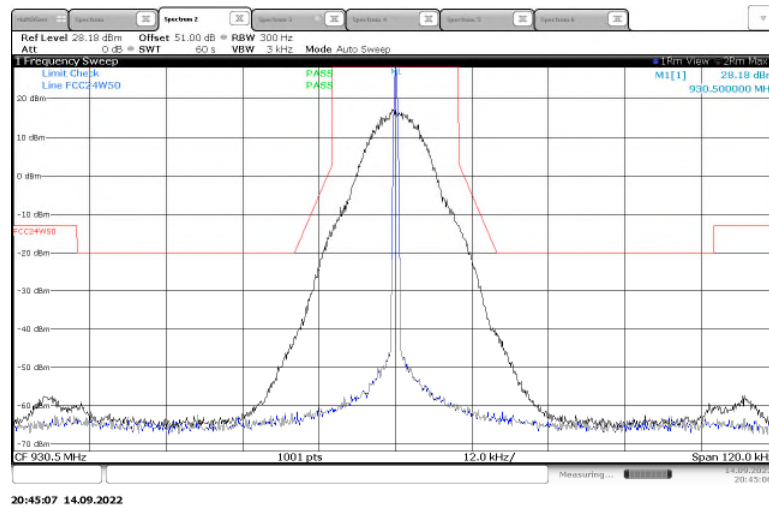


Figure 2.2.6-18: Emissions Mask – 930.5 MHz - 25 kHz Channel Spacing- m4Pass2 Mode – Low Power

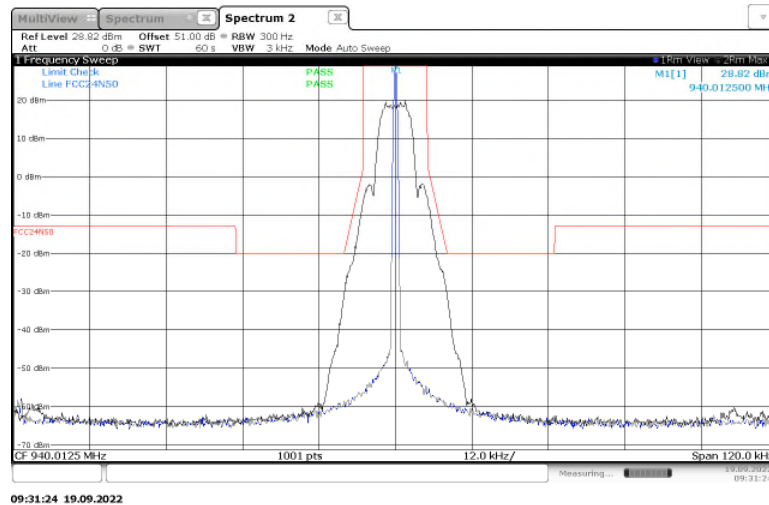


Figure 2.2.6-19: Emissions Mask – 940.0125 MHz - 12.5 kHz Channel Spacing - mPass Mode – Low Power

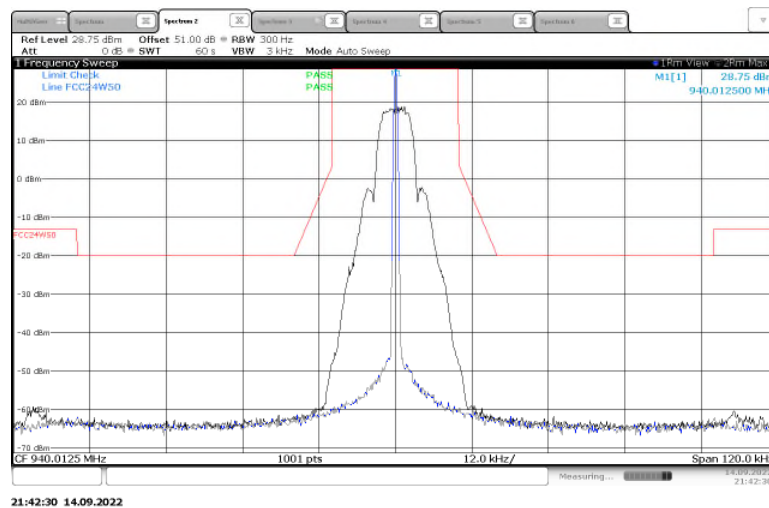


Figure 2.2.6-20: Emissions Mask – 940.0125 MHz - 25 kHz Channel Spacing- mPass Mode – Low Power

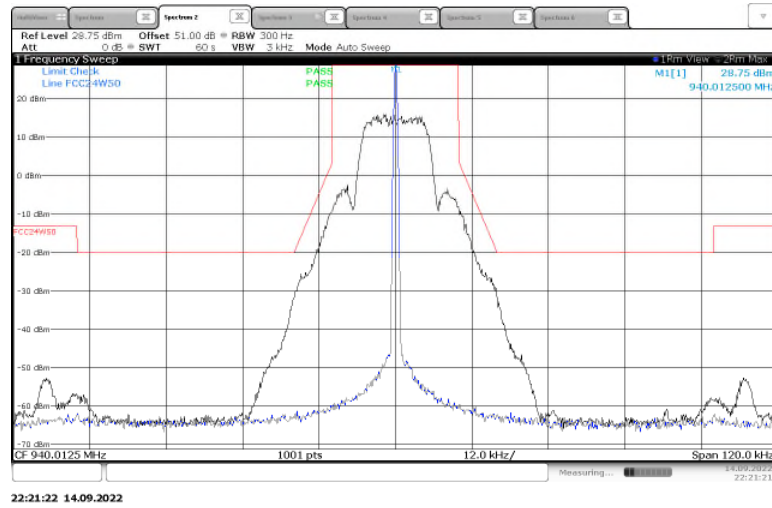


Figure 2.2.6-21: Emissions Mask – 940.0125 MHz - 25 kHz Channel Spacing- mPass2 Mode – Low Power

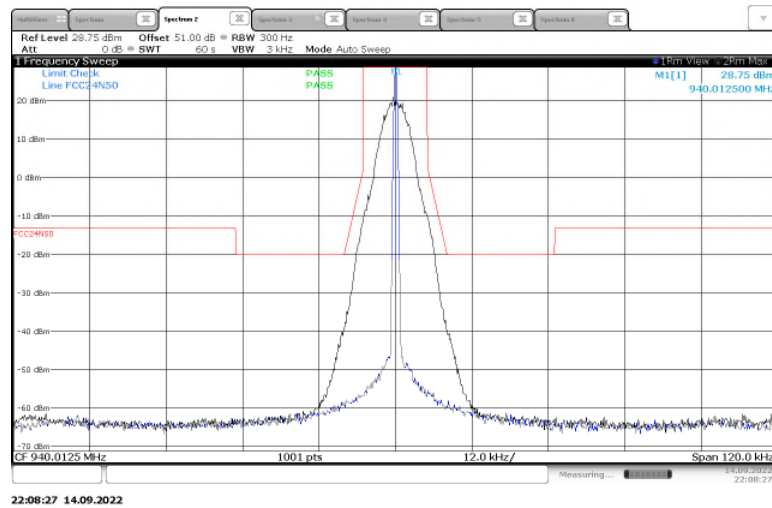


Figure 2.2.6-22: Emissions Mask – 940.0125 MHz - 12.5 kHz Channel Spacing - m4Pass Mode – Low Power

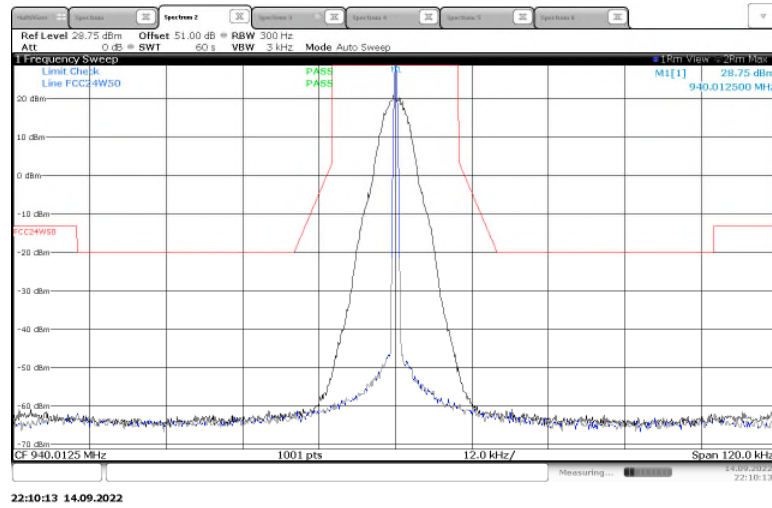


Figure 2.2.6-23: Emissions Mask – 940.0125 MHz - 25 kHz Channel Spacing- m4Pass Mode – Low Power

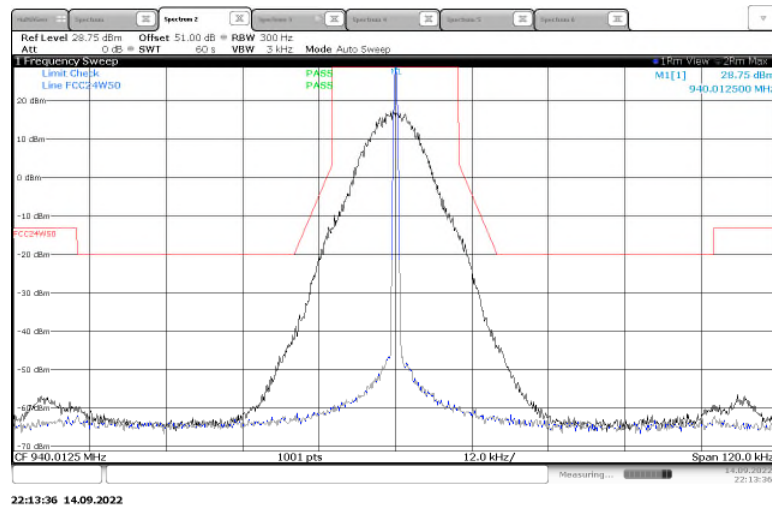


Figure 2.2.6-24: Emissions Mask – 940.0125 MHz - 25 kHz Channel Spacing- m4Pass2 Mode – Low Power



FCC 47 CFR Parts: 2.1053; 101.111 a(6); ISED Canada RSS-119 5.8.6

High Power Mode

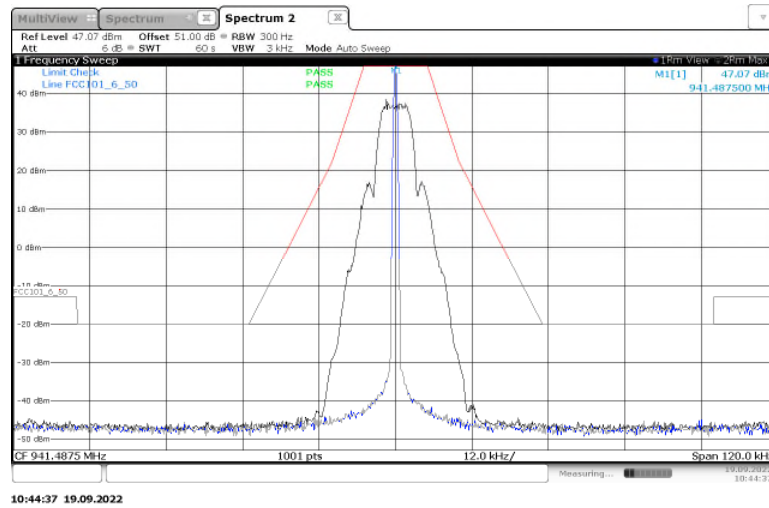


Figure 2.2.6-25: Emissions Mask – 941.4875 MHz - 25 kHz Channel Spacing- mPass Mode – High Power

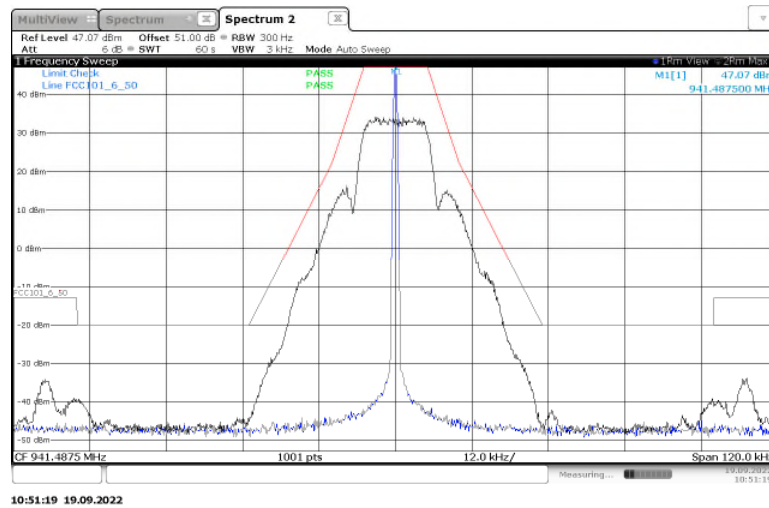


Figure 2.2.6-26: Emissions Mask – 941.4875 MHz - 25 kHz Channel Spacing- mPass2 Mode – High Power

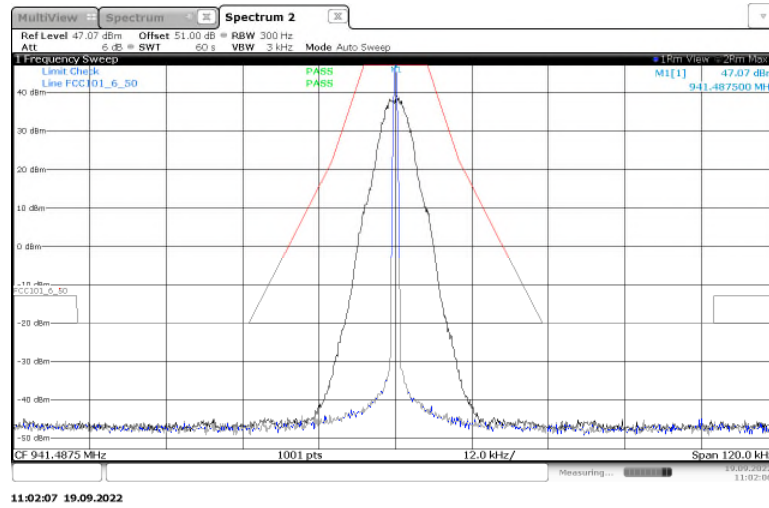


Figure 2.2.6-27: Emissions Mask – 941.4875 MHz - 25 kHz Channel Spacing- m4Pass Mode – High Power

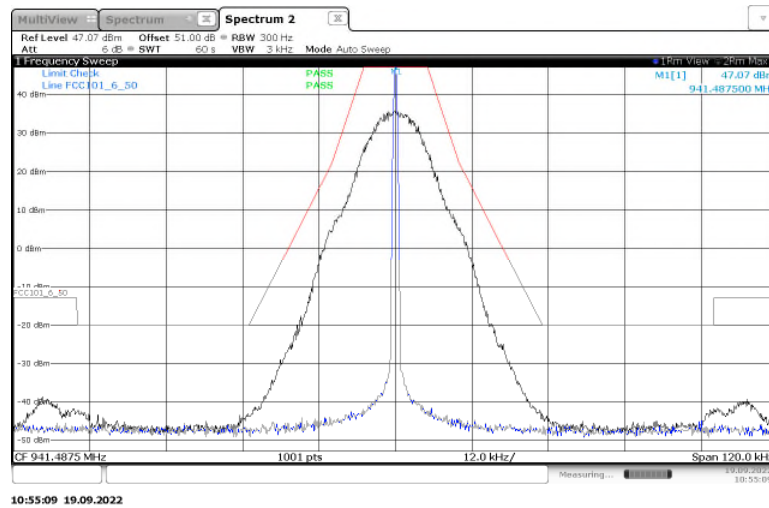


Figure 2.2.6-28: Emissions Mask – 941.4875 MHz - 25 kHz Channel Spacing- m4Pass2 Mode – High Power

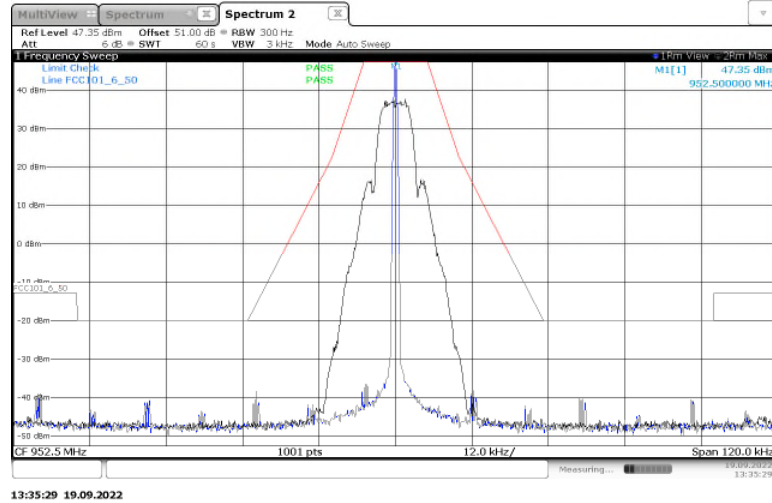


Figure 2.2.6-29: Emissions Mask – 952.5 MHz - 25 kHz Channel Spacing- mPass Mode – High Power

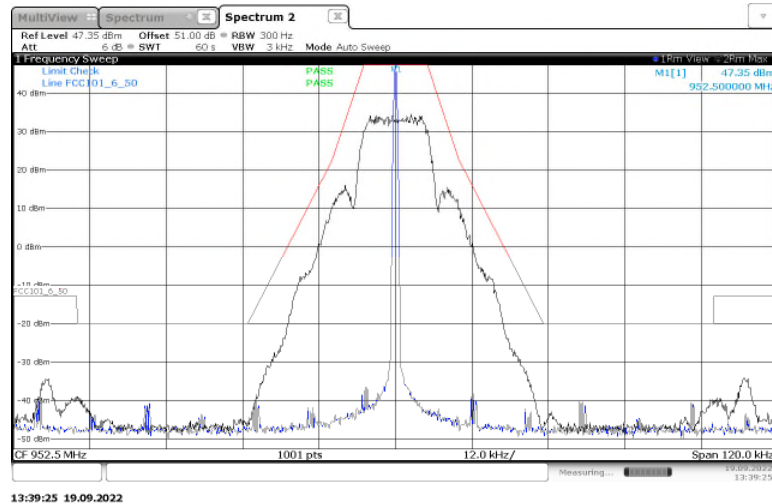


Figure 2.2.6-30: Emissions Mask – 952.5 MHz - 25 kHz Channel Spacing- mPass2 Mode – High Power

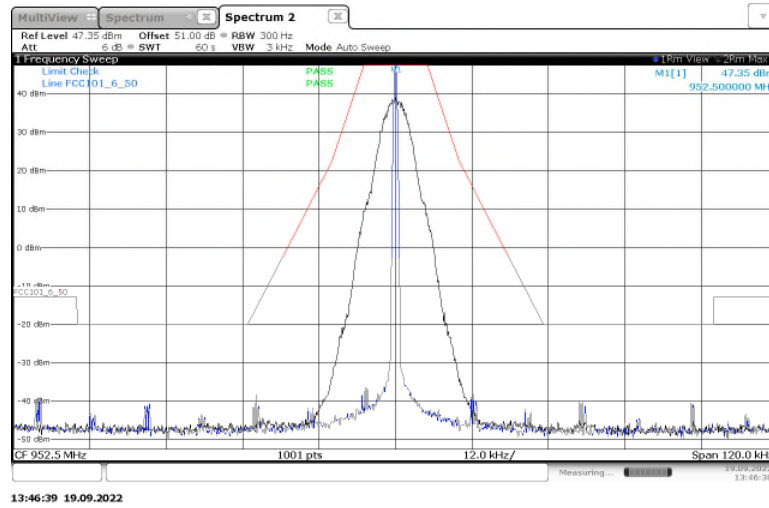


Figure 2.2.6-31: Emissions Mask – 952.5 MHz - 25 kHz Channel Spacing- m4Pass Mode – High Power

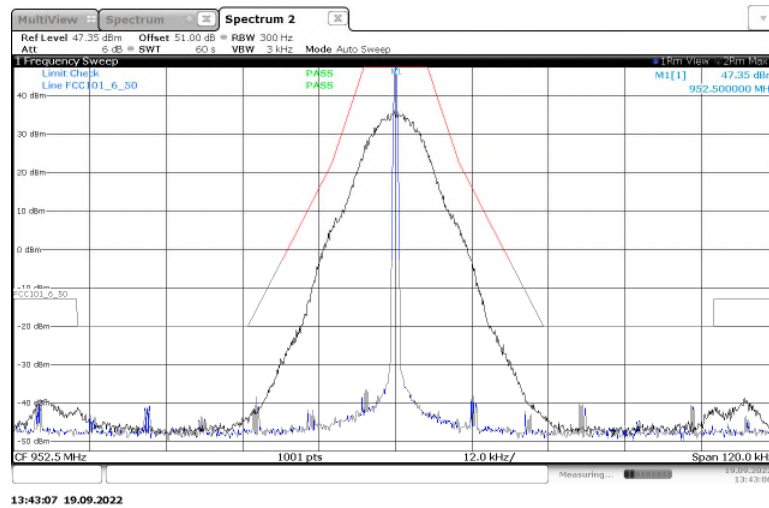


Figure 2.2.6-32: Emissions Mask – 952.5 MHz - 25 kHz Channel Spacing- m4Pass2 Mode – High Power

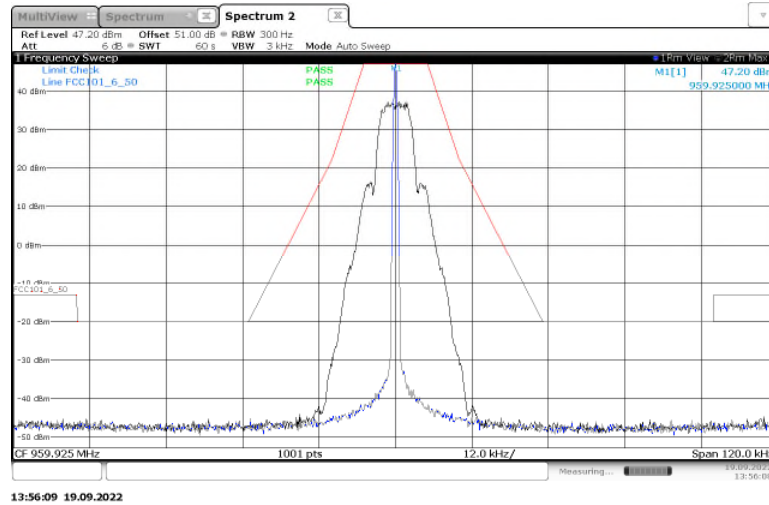


Figure 2.2.6-33: Emissions Mask – 959.925 MHz - 25 kHz Channel Spacing- mPass Mode – High Power

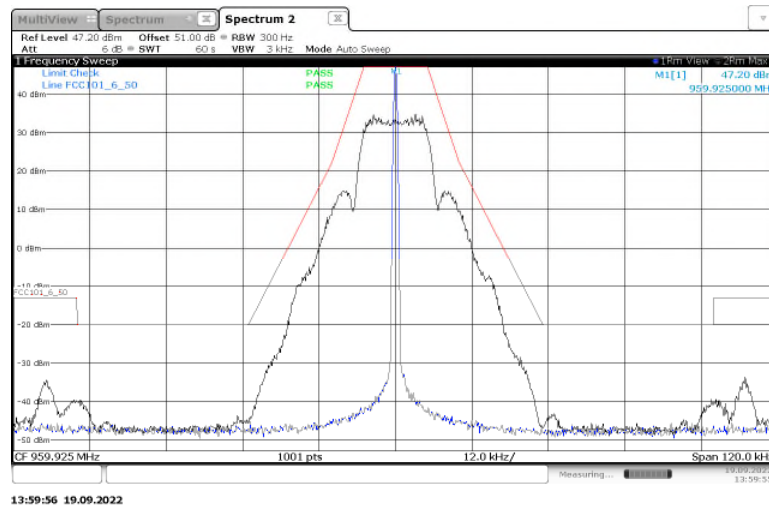


Figure 2.2.6-34: Emissions Mask – 959.925 MHz - 25 kHz Channel Spacing- mPass2 Mode – High Power

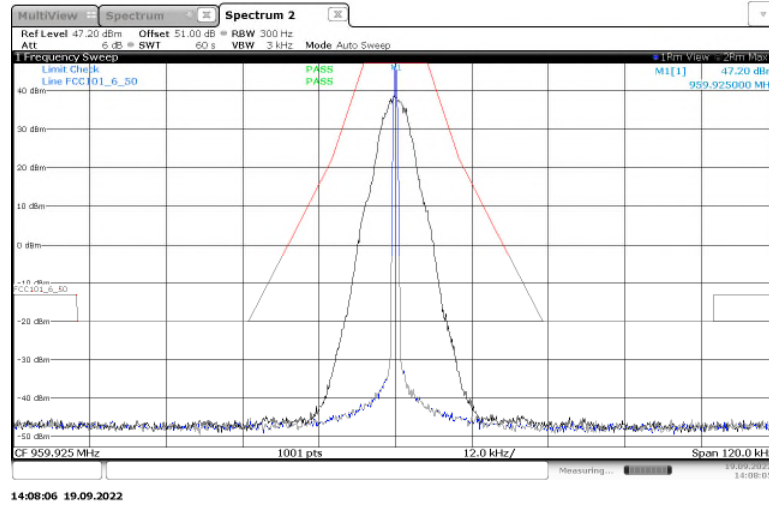


Figure 2.2.6-35: Emissions Mask – 959.925 MHz - 25 kHz Channel Spacing- m4Pass Mode – High Power

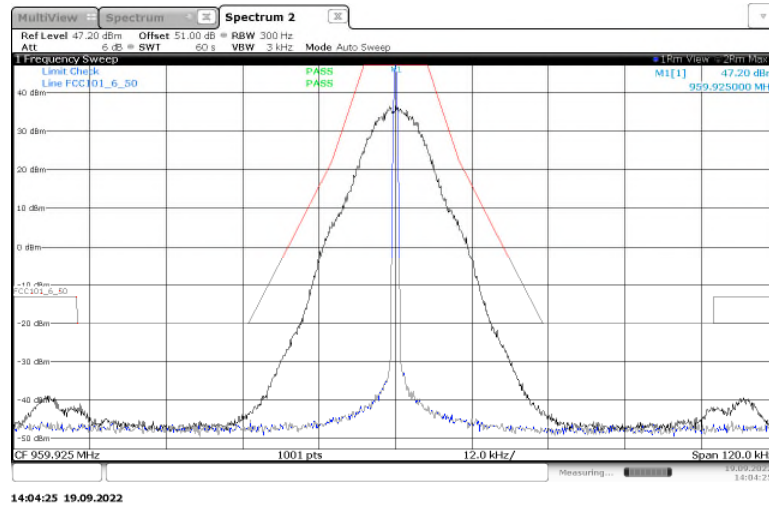


Figure 2.2.6-36: Emissions Mask – 959.925 MHz - 25 kHz Channel Spacing- m4Pass2 Mode – High Power



Low Power Mode

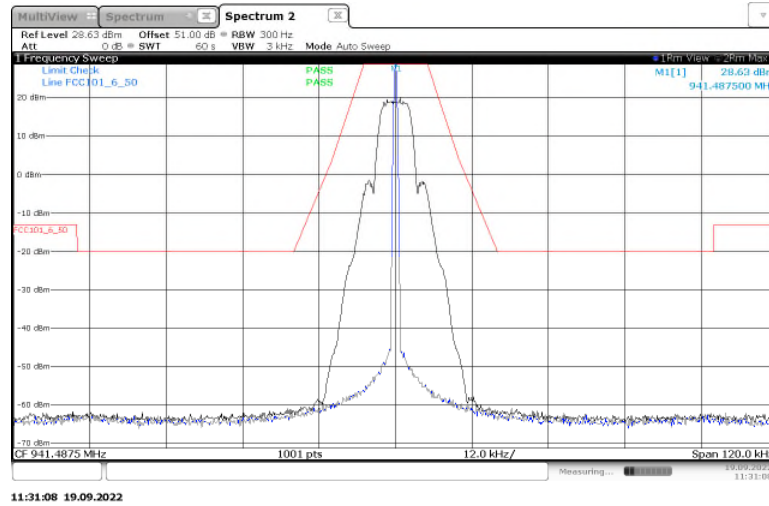


Figure 2.2.6-37: Emissions Mask – 941.4875 MHz - 25 kHz Channel Spacing- mPass Mode – Low Power

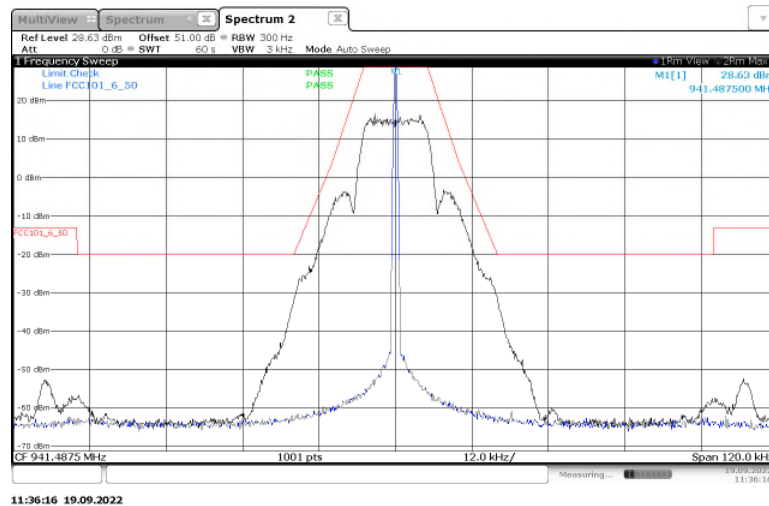


Figure 2.2.6-38: Emissions Mask – 941.4875 MHz - 25 kHz Channel Spacing- mPass2 Mode – Low Power

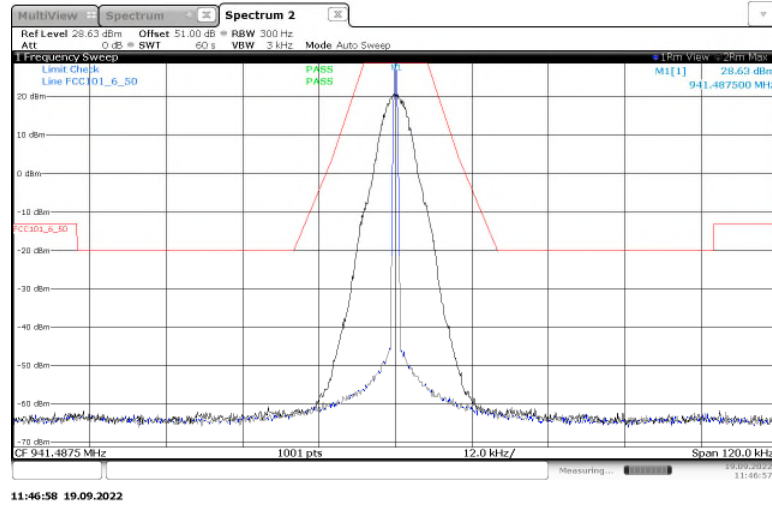


Figure 2.2.6-39: Emissions Mask – 941.4875 MHz - 25 kHz Channel Spacing- m4Pass Mode – Low Power

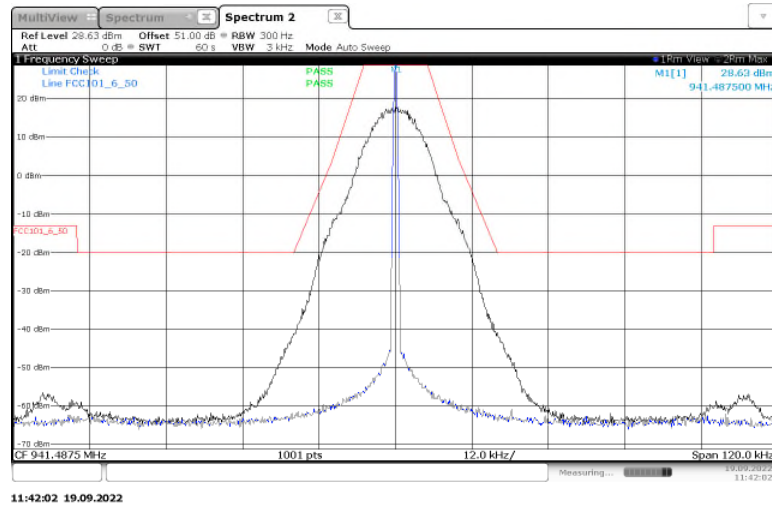


Figure 2.2.6-40: Emissions Mask – 941.4875 MHz - 25 kHz Channel Spacing- m4Pass2 Mode – Low Power

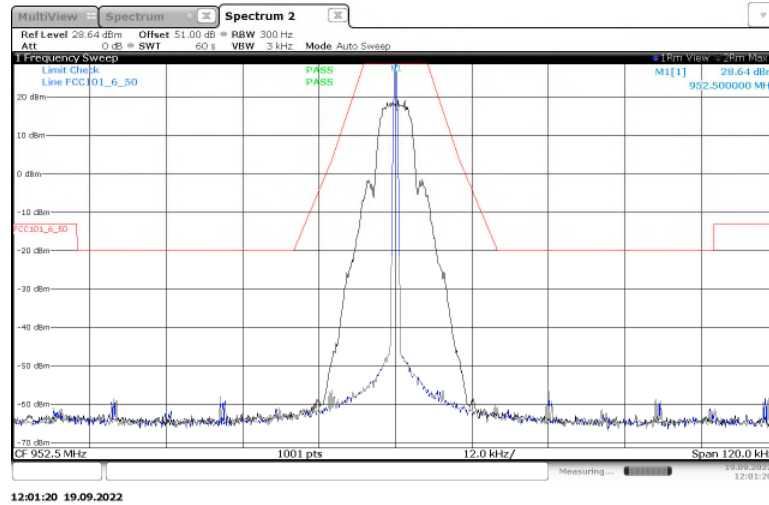


Figure 2.2.6-41: Emissions Mask – 952.5 MHz - 25 kHz Channel Spacing- mPass Mode – Low Power

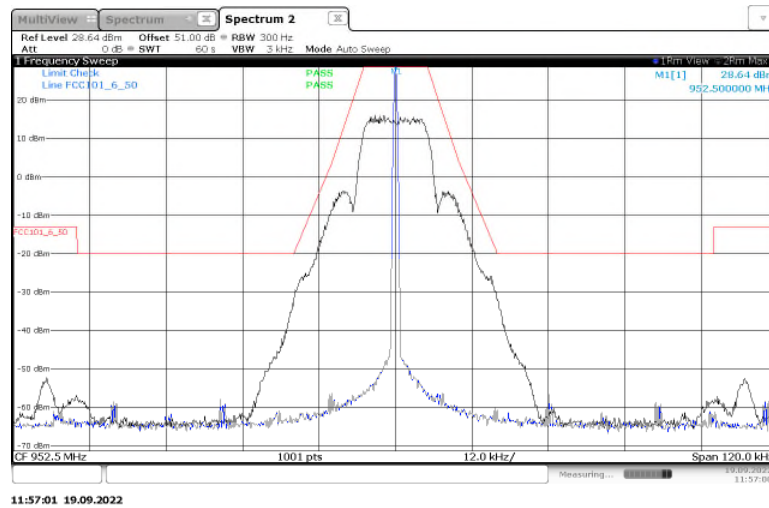


Figure 2.2.6-42: Emissions Mask – 952.5 MHz - 25 kHz Channel Spacing- mPass2 Mode – Low Power

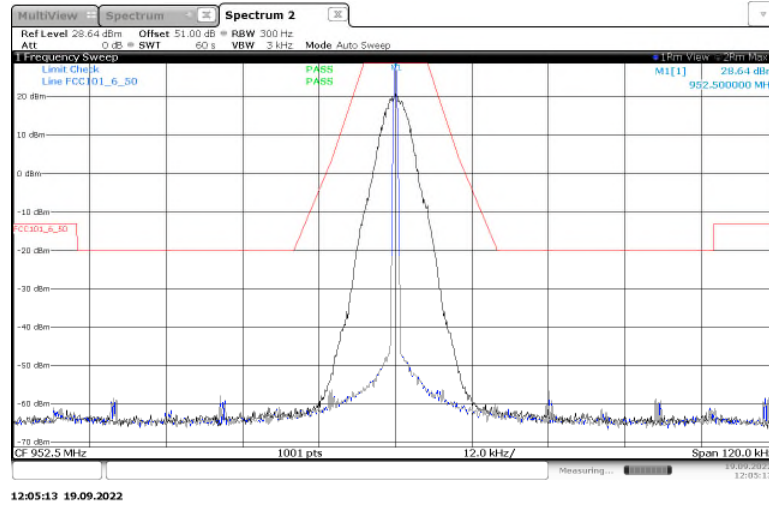


Figure 2.2.6-43: Emissions Mask – 952.5 MHz - 25 kHz Channel Spacing- m4Pass Mode – Low Power

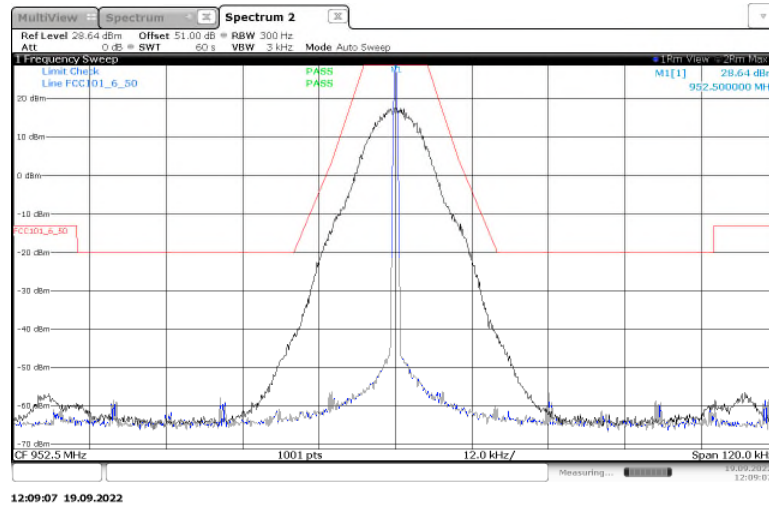


Figure 2.2.6-44: Emissions Mask – 952.5 MHz - 25 kHz Channel Spacing- m4Pass2 Mode – Low Power

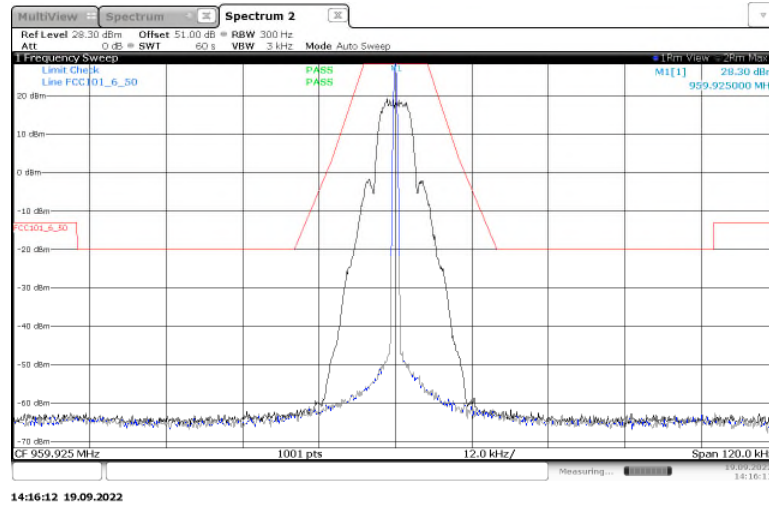


Figure 2.2.6-45: Emissions Mask – 959.925 MHz - 25 kHz Channel Spacing- mPass Mode – Low Power

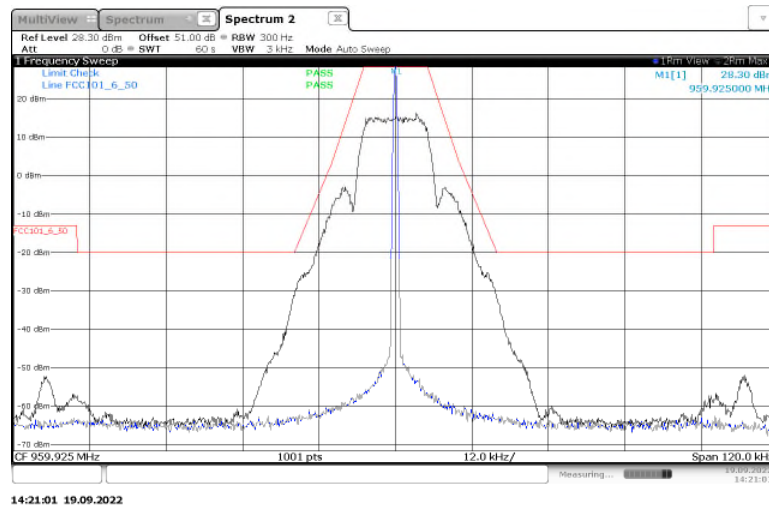


Figure 2.2.6-46: Emissions Mask – 959.925 MHz - 25 kHz Channel Spacing- mPass2 Mode – Low Power

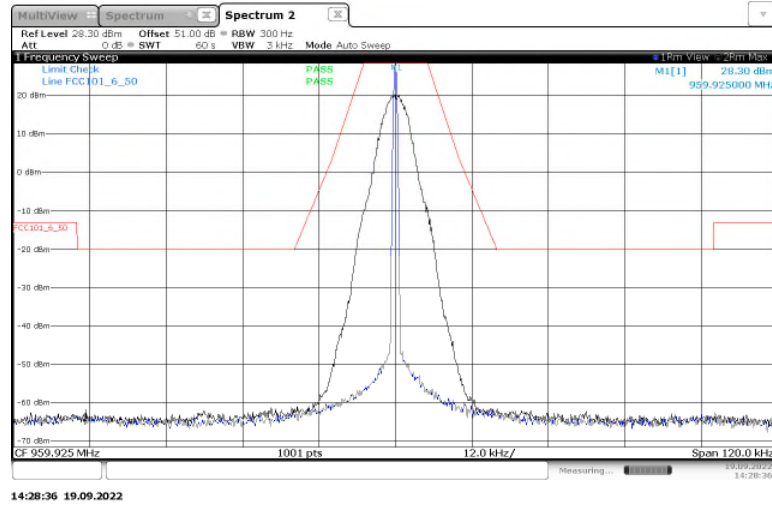


Figure 2.2.6-47: Emissions Mask – 959.925 MHz - 25 kHz Channel Spacing- m4Pass Mode – Low Power

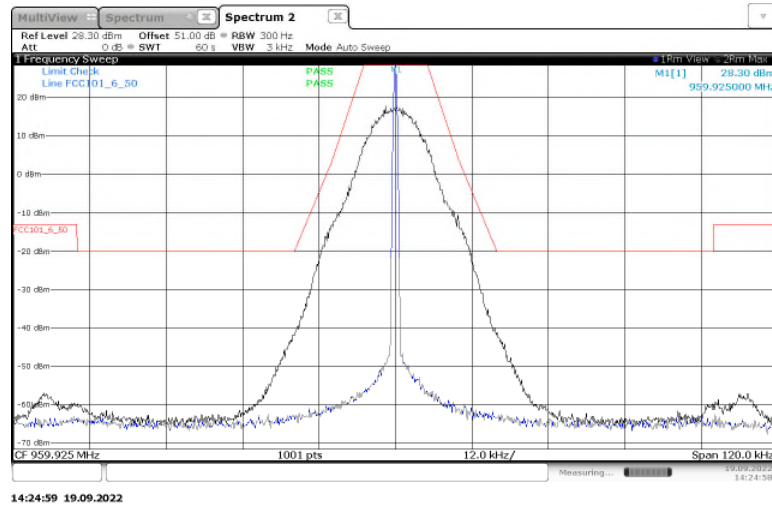


Figure 2.2.6-48: Emissions Mask – 959.925 MHz - 25 kHz Channel Spacing- m4Pass2 Mode – Low Power



2.2.7 Test Location and Test Equipment Used

This test was carried out in TÜV SÜD America, Inc., 5610 W. Sligh Ave, Suite 100, Tampa, FL 33634, USA.

Instrument	Manufacturer	Type No	TE No	Software / Firmware Revision	Calibration Period (months)	Calibration Due
50ohms M/F 4GHz, 100W Attenuator	Fairview Microwave Inc.	SA4N100-20	615	N/A	12	25-Mar-2023
Duratest High Frequency Cable 26.5GHz	Teledyne Storm Products	921-0101-036	BEMC02112	N/A	12	20-Oct-2022
Atten 30dB N-M/F, DC, 18 GHz, 10W	Aeroflex Inmet	18N10W-30	DEMC3041	N/A	12	15-Jul-2023
Signal & Spectrum Analyzer	Rohde & Schwarz	FSW43	DEMC3085	2.90 SP1	12	07-Jun-2023

TU - Traceability Unscheduled

O/P MON - Traceability Unscheduled

N/A - Not Applicable

NCR – No Calibration Required



2.3 Occupied Bandwidth

2.3.1 Specification Reference

FCC Section 2.1049; ISED Canada RSS-GEN 6.7

2.3.2 Equipment Under Test and Modification State

M420, SN: 1953335308
M420 PA, SN:420-48

2.3.3 Date of Test

2022-September-06

2.3.4 Test Method

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer through suitable of passive attenuation. The internal correction factors of the spectrum analyzer were employed to correct for any cable and attenuator losses.

The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts. The nominal IF filter 3 dB bandwidth (RBW) is in the range of 1% to 5% of the OBW, and the VBW was set $\geq 3 \times$ RBW. The reference level was set to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. The measurements were made using the spectrum analyzer’s 99% BW function.

2.3.5 Environmental Conditions

Ambient Temperature 21.7 °C
Relative Humidity 50 %
Atmospheric Pressure 1015 mbar

2.3.6 Test Results

High Power

Table 2.3.6-1: 99% Bandwidth – 930.5 MHz – High Power

Frequency (MHz)	ISED Canada Rule Part	Mode	99% Bandwidth (kHz)
930.5	RSS-134	mPass	5.802
930.5	RSS-134	mPass2	11.883
930.5	RSS-134	m4Pass	6.0907
930.5	RSS-134	m4Pass2	12.1787

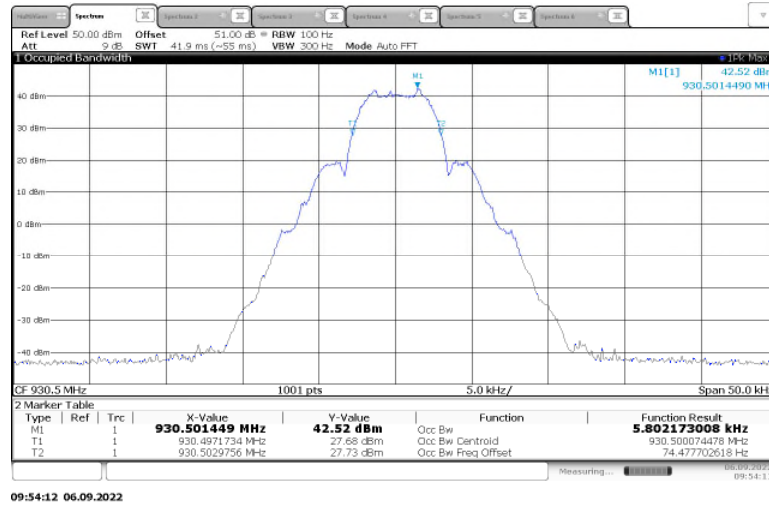


Figure 2.3.6-1: 99% Bandwidth – 930.5 MHz - mPass – High Power

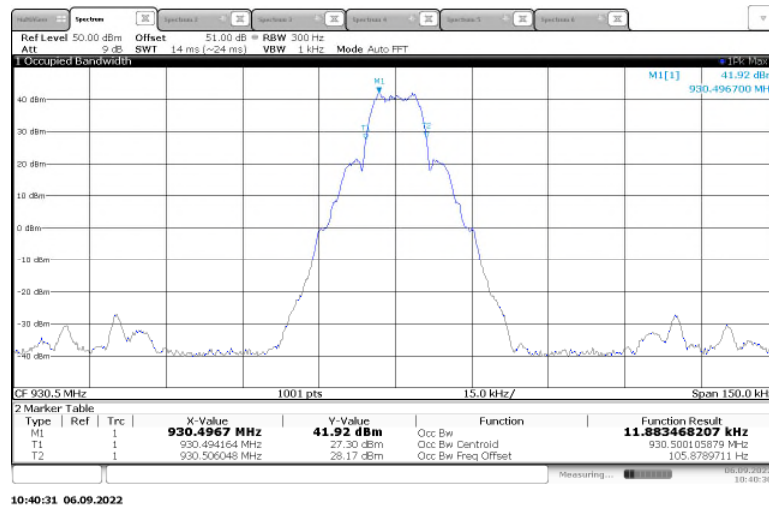


Figure 2.3.6-2: 99% Bandwidth – 930.5 MHz - mPass2 – High Power

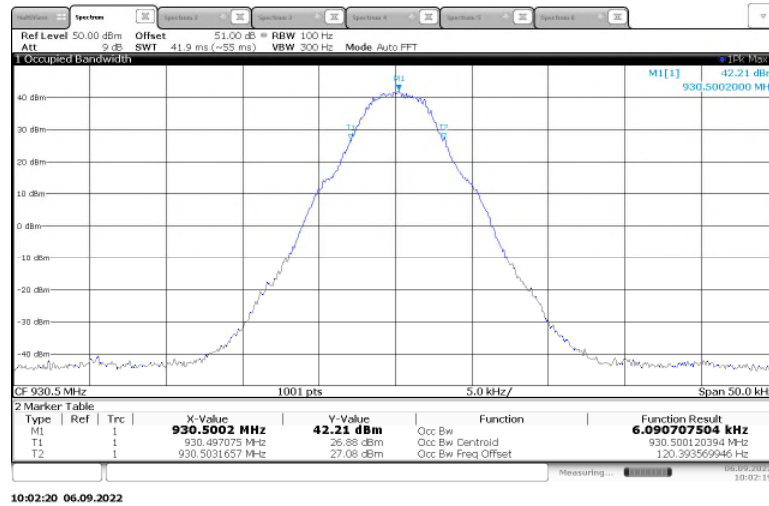


Figure 2.3.6-3: 99% Bandwidth – 930.5 MHz - m4Pass – High Power

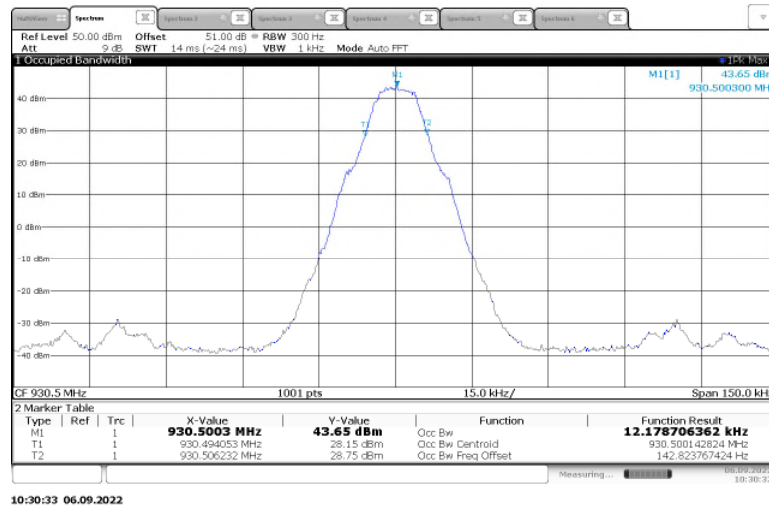


Figure 2.3.6-4: 99% Bandwidth – 930.5 MHz - m4Pass2 – High Power



Table 2.3.6-2: 99% Bandwidth – 940.0125 MHz – High Power

Frequency (MHz)	ISED Canada Rule Part	Mode	99% Bandwidth (kHz)
940.0125	RSS-134	mPass	5.8317
940.0125	RSS-134	mPass2	11.8041
940.0125	RSS-134	m4Pass	6.0324
940.0125	RSS-134	m4Pass2	12.367

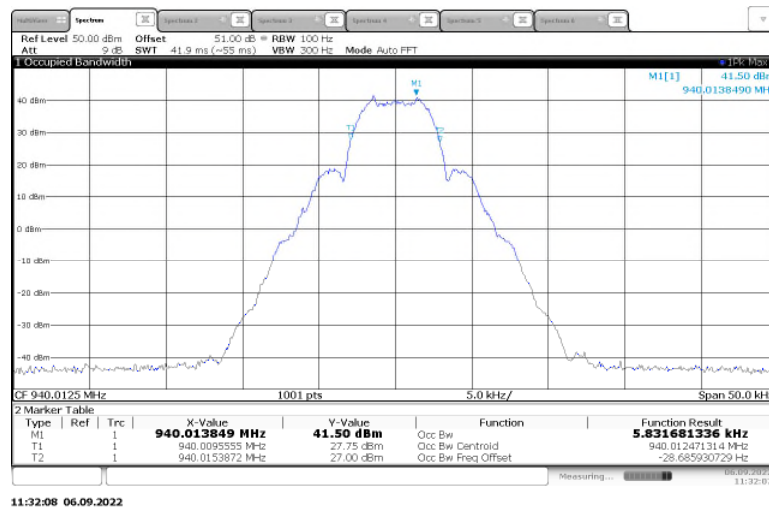


Figure 2.3.6-5: 99% Bandwidth – 940.0125 MHz - mPass – High Power

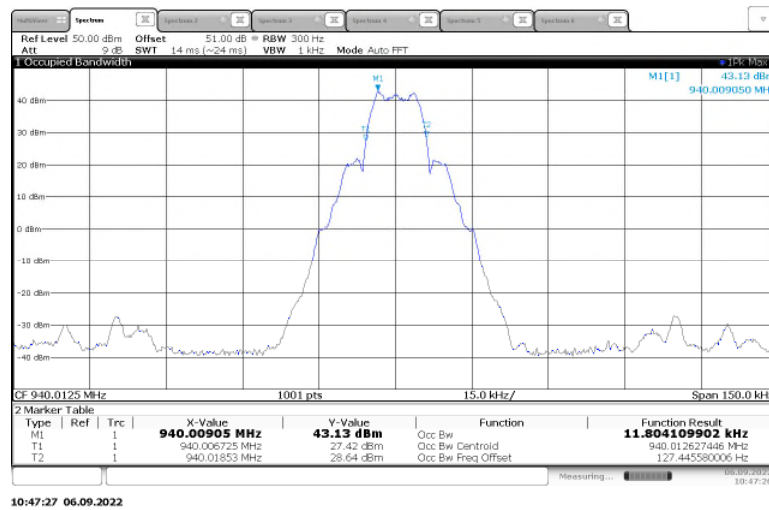


Figure 2.3.6-6: 99% Bandwidth – 940.0125 MHz - mPass2 – High Power

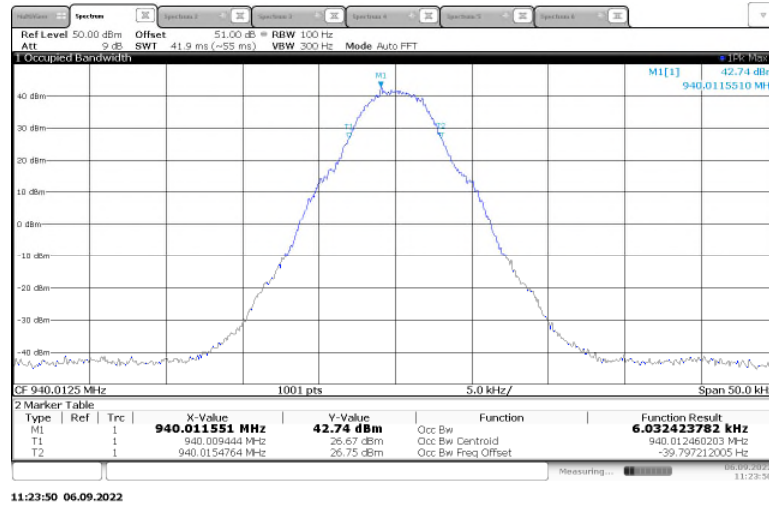


Figure 2.3.6-7: 99% Bandwidth – 940.0125 MHz - m4Pass – High Power

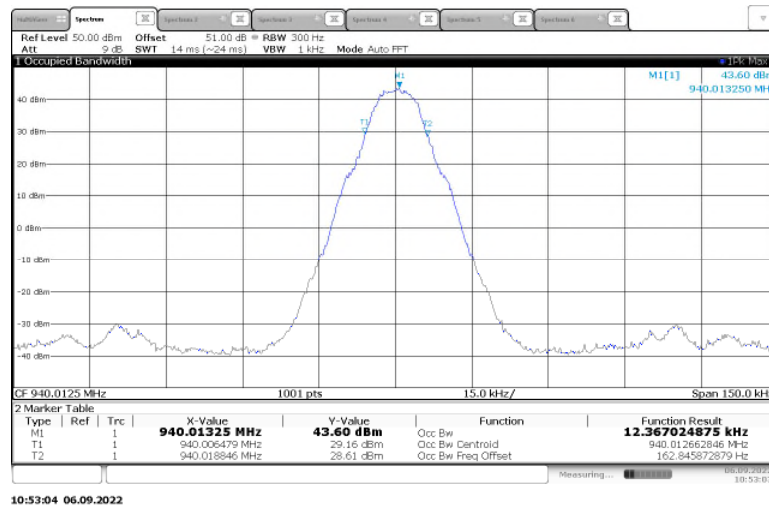


Figure 2.3.6-8: 99% Bandwidth – 940.0125 MHz - m4Pass2 – High Power



Table 2.3.6-3: 99% Bandwidth – 941.4875 MHz – High Power

Frequency (MHz)	ISED Canada Rule Part	Mode	99% Bandwidth (kHz)
941.4875	RSS-119	mPass	5.7803
941.4875	RSS-119	mPass2	11.9257
941.4875	RSS-119	m4Pass	6.0748
941.4875	RSS-119	m4Pass2	12.19738

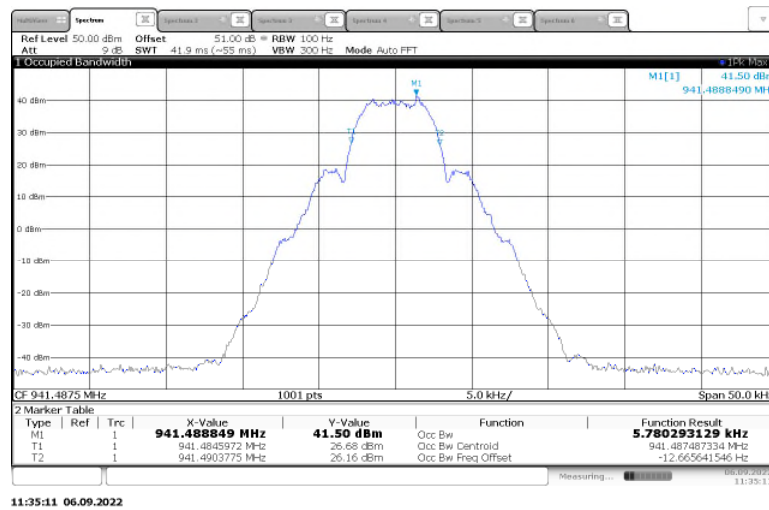


Figure 2.3.6-9: 99% Bandwidth – 941.4875 MHz - mPass – High Power

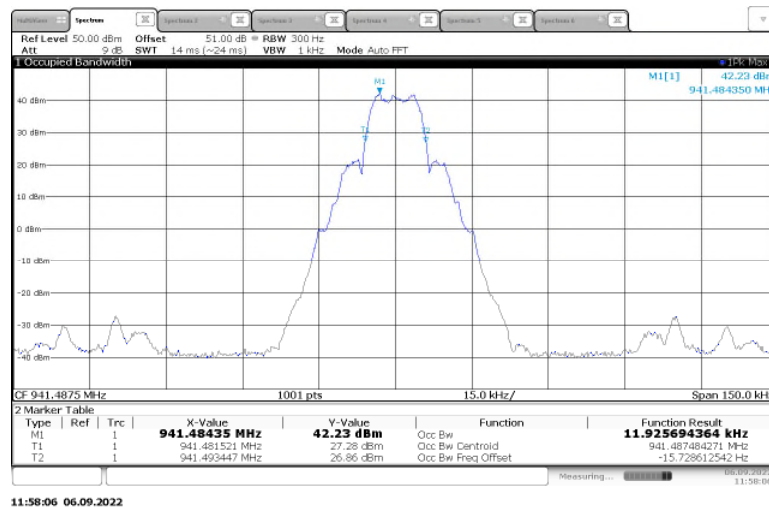


Figure 2.3.6-10: 99% Bandwidth – 941.4875 MHz - mPass2 – High Power

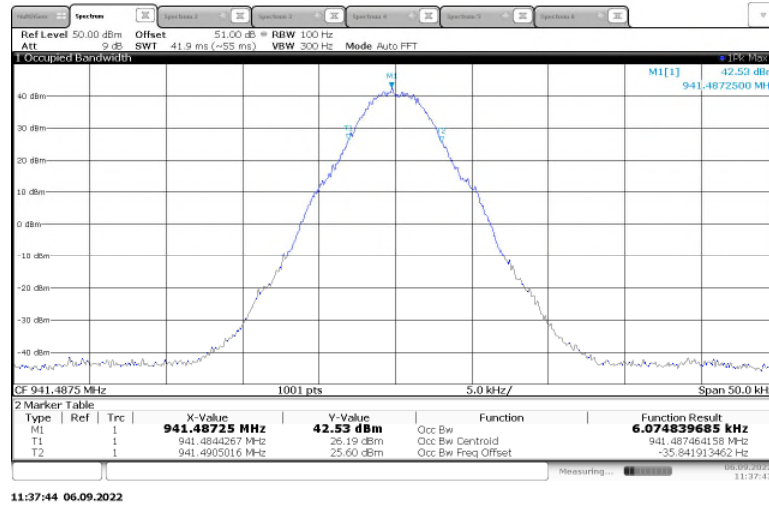


Figure 2.3.6-11: 99% Bandwidth – 941.4875 MHz - m4Pass – High Power

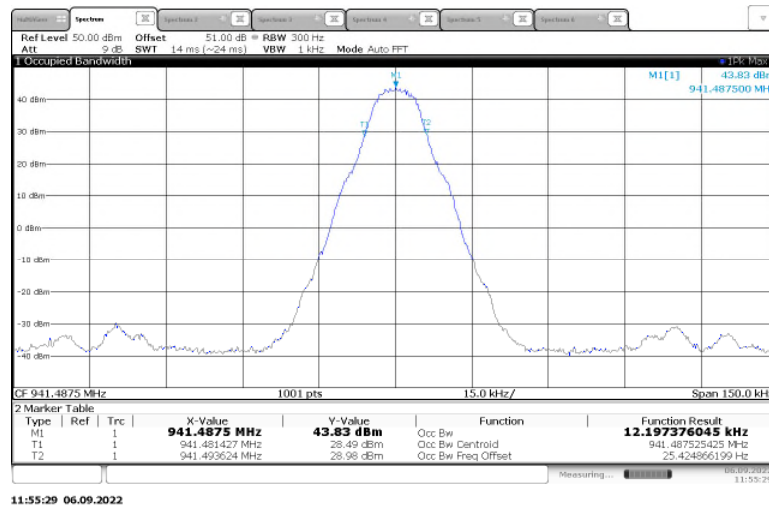


Figure 2.3.6-12: 99% Bandwidth – 941.4875 MHz - m4Pass2 – High Power



Table 2.3.6-4: 99% Bandwidth – 952.5 MHz – High Power

Frequency (MHz)	ISED Canada Rule Part	Mode	99% Bandwidth (kHz)
952.5	RSS-119	mPass	5.8031
952.5	RSS-119	mPass2	11.8123
952.5	RSS-119	m4Pass	6.1326
952.5	RSS-119	m4Pass2	12.1323

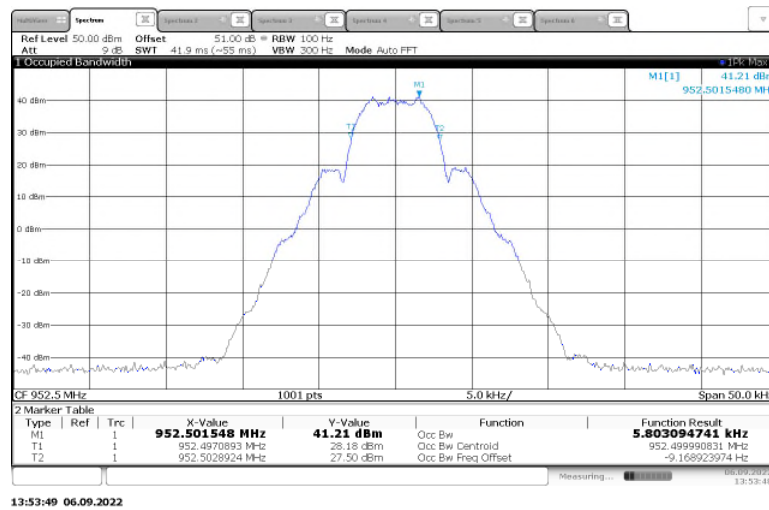


Figure 2.3.6-13: 99% Bandwidth – 952.5 MHz - mPass – High Power

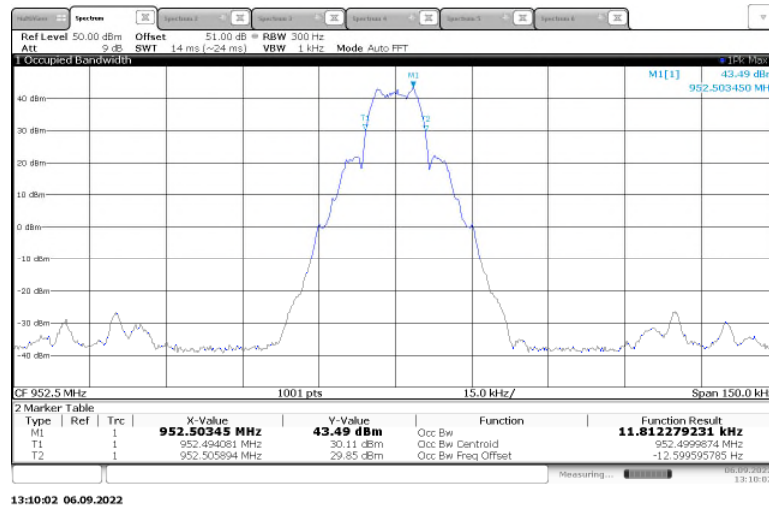


Figure 2.3.6-14: 99% Bandwidth – 952.5 MHz - mPass2 – High Power

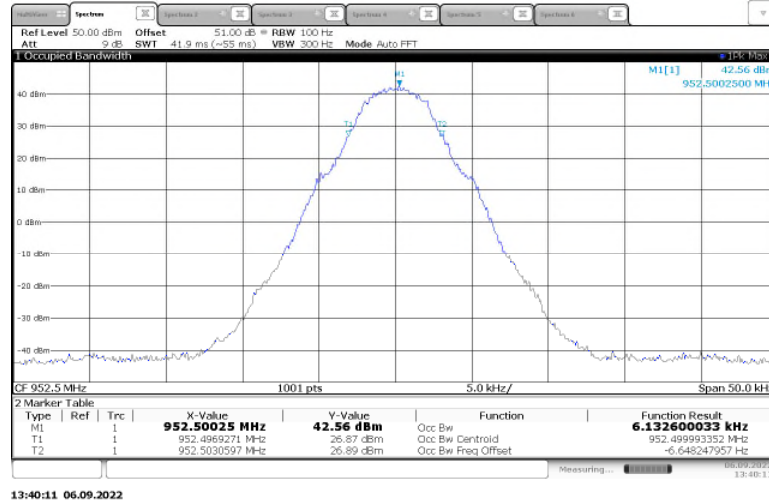


Figure 2.3.6-15: 99% Bandwidth – 952.5 MHz - m4Pass – High Power

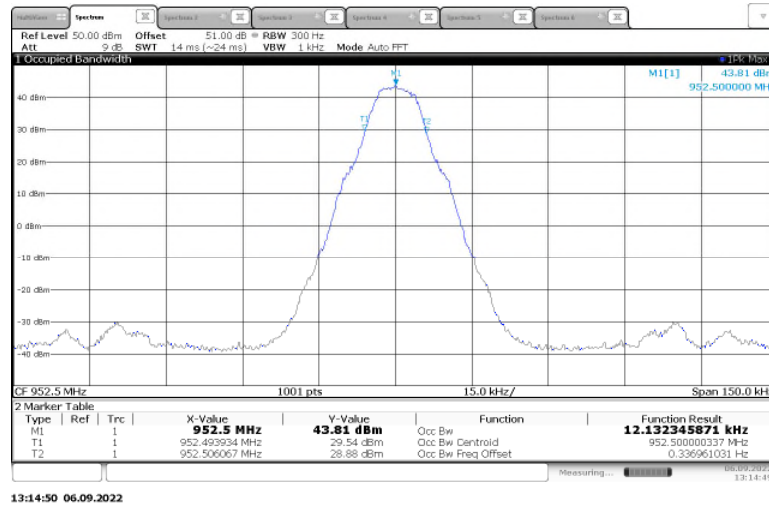


Figure 2.3.6-16: 99% Bandwidth – 952.5 MHz - m4Pass2 – High Power



Table 2.3.6-5: 99% Bandwidth – 959.925 MHz – High Power

Frequency (MHz)	ISED Canada Rule Part	Mode	99% Bandwidth (kHz)
959.925	RSS-119	mPass	5.8283
959.925	RSS-119	mPass2	11.8397
959.925	RSS-119	m4Pass	6.04467
959.925	RSS-119	m4Pass2	12.2749

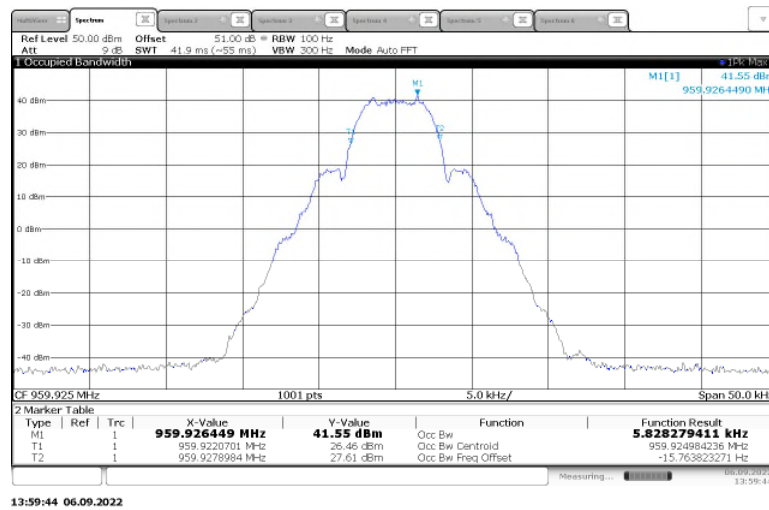


Figure 2.3.6-17: 99% Bandwidth – 959.925 MHz - mPass – High Power

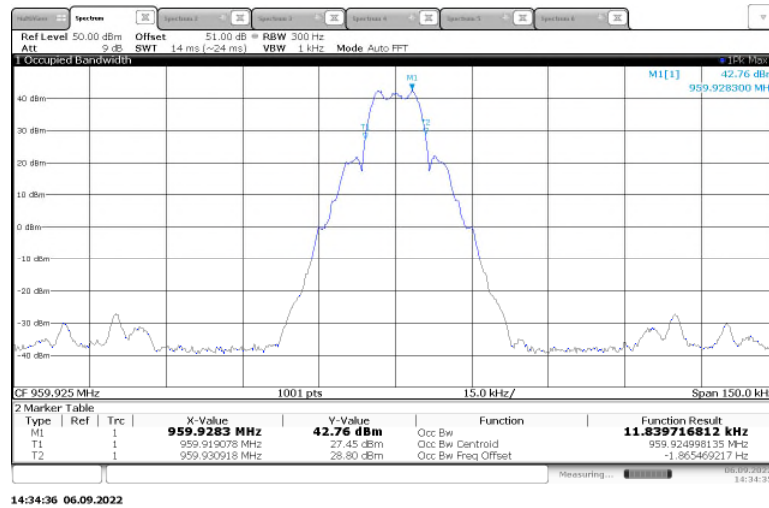


Figure 2.3.6-18: 99% Bandwidth – 959.925 MHz - mPass2 – High Power

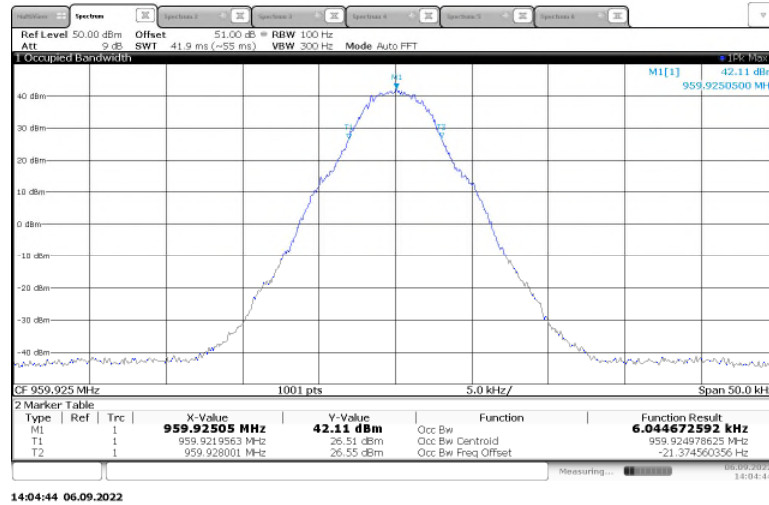


Figure 2.3.6-19: 99% Bandwidth – 959.925 MHz - m4Pass – High Power

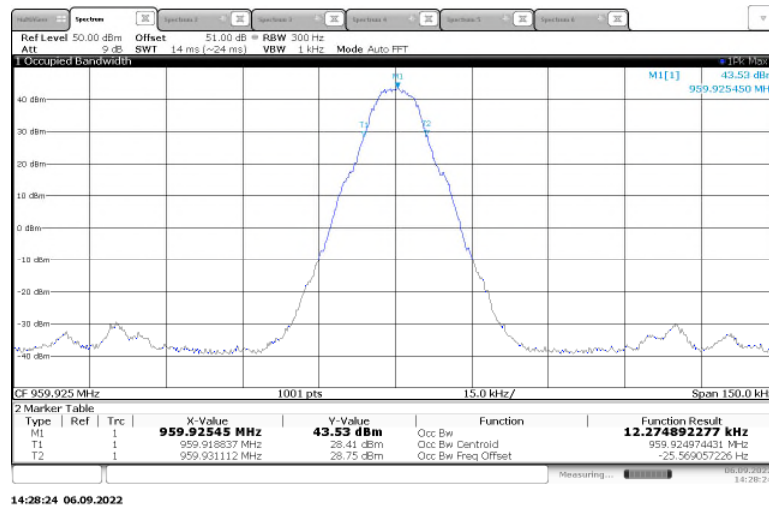


Figure 2.3.6-20: 99% Bandwidth – 959.925 MHz - m4Pass2 – High Power



Low Power

Table 2.3.6-6: 99% Bandwidth – 930.5 MHz – Low Power

Frequency (MHz)	ISED Canada Rule Part	Mode	99% Bandwidth (kHz)
930.5	RSS-134	mPass	5.79698
930.5	RSS-134	mPass2	11.8626
930.5	RSS-134	m4Pass	6.0999
930.5	RSS-134	m4Pass2	12.20388

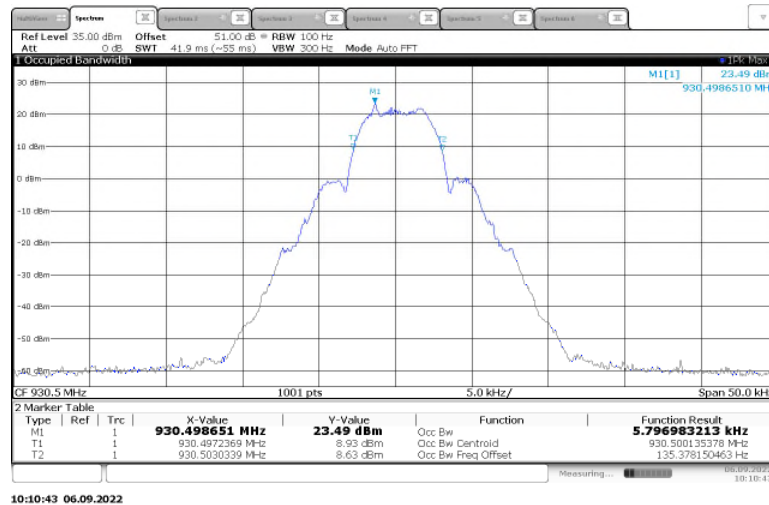


Figure 2.3.6-21: 99% Bandwidth – 930.5 MHz - mPass – Low Power

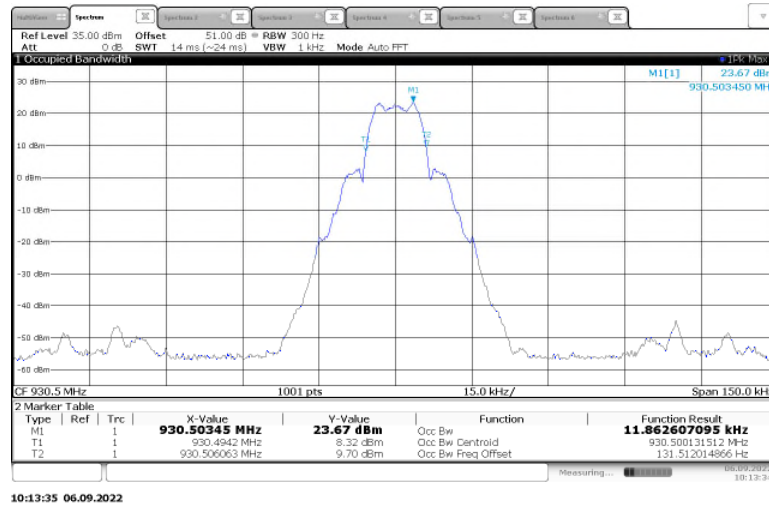


Figure 2.3.6-22: 99% Bandwidth – 930.5 MHz - mPass2 – Low Power

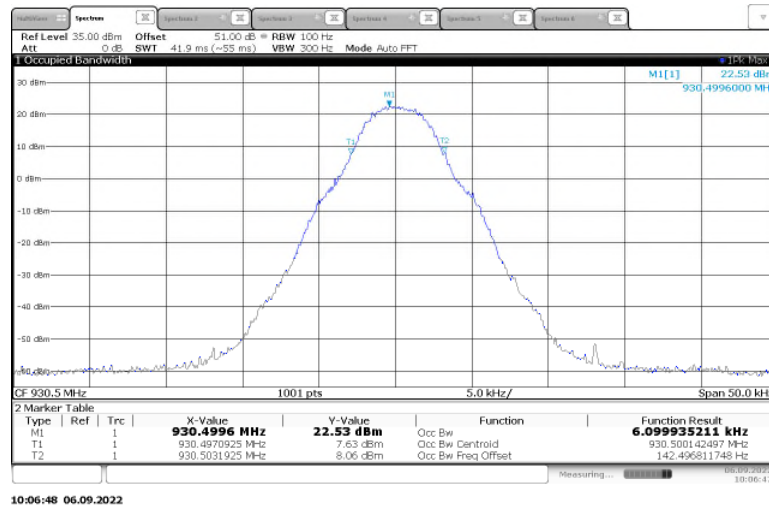


Figure 2.3.6-23: 99% Bandwidth – 930.5 MHz - m4Pass – Low Power

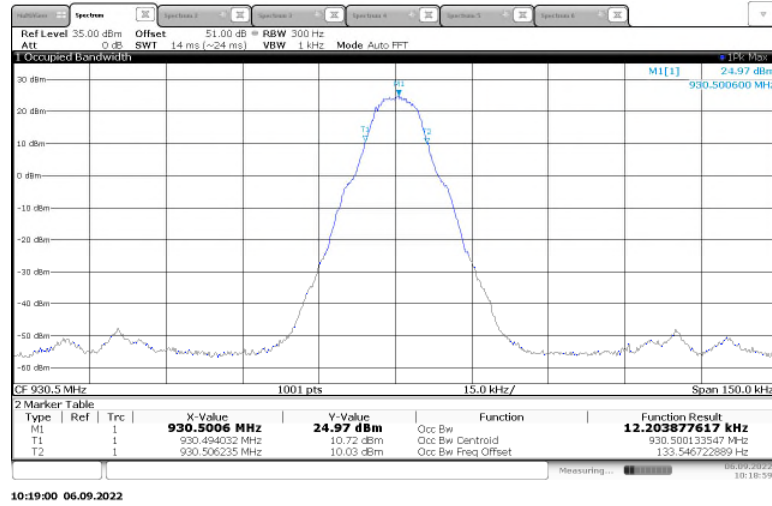


Figure 2.3.6-24: 99% Bandwidth – 930.5 MHz - m4Pass2 – Low Power



Table 2.3.6-7: 99% Bandwidth – 940.0125 MHz – Low Power

Frequency (MHz)	ISED Canada Rule Part	Mode	99% Bandwidth (kHz)
940.0125	RSS-119	mPass	5.9211
940.0125	RSS-119	mPass2	11.8431
940.0125	RSS-119	m4Pass	6.112
940.0125	RSS-119	m4Pass2	12.1809

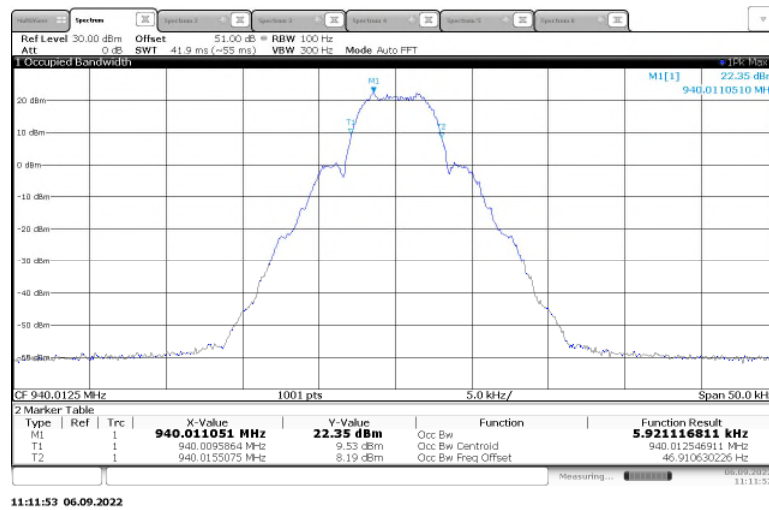


Figure 2.3.6-25: 99% Bandwidth – 940.0125 MHz - mPass – Low Power

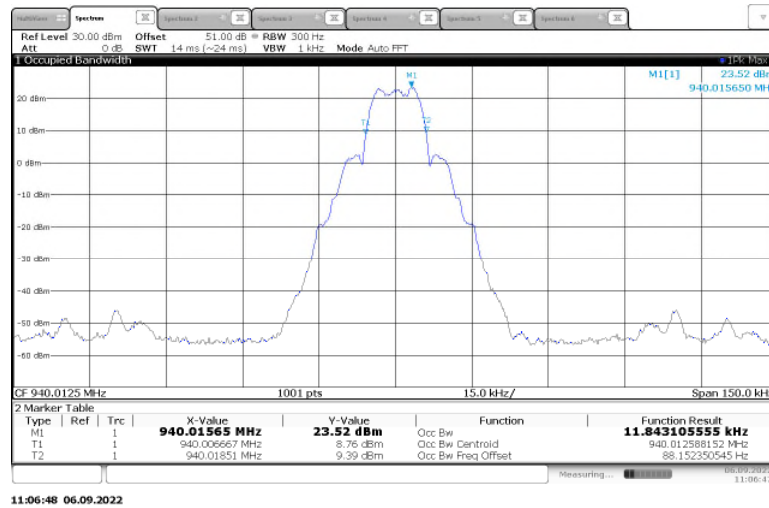


Figure 2.3.6-26: 99% Bandwidth – 940.0125 MHz - mPass2 – Low Power

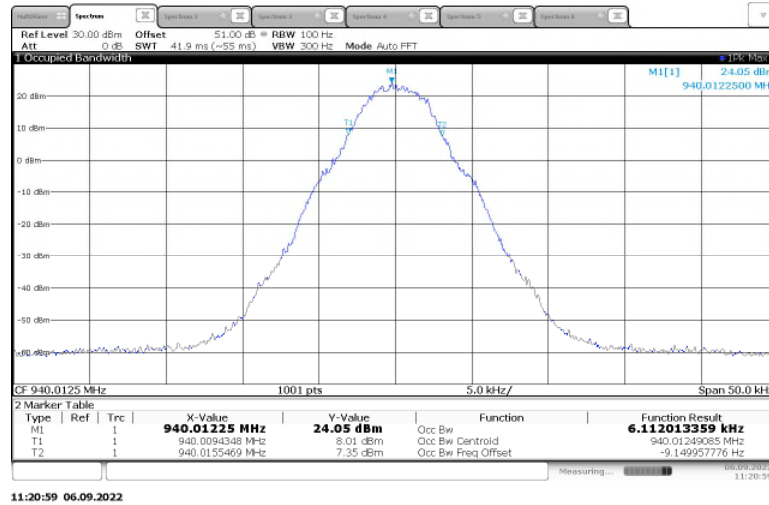


Figure 2.3.6-27: 99% Bandwidth – 940.0125 MHz - m4Pass – Low Power

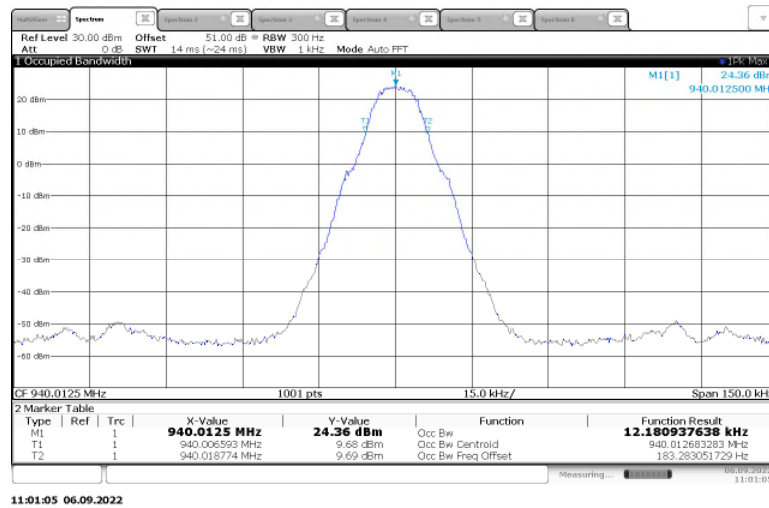


Figure 2.3.6-28: 99% Bandwidth – 940.0125 MHz - m4Pass2 – Low Power



Table 2.3.6-8: 99% Bandwidth – 941.4875 MHz – Low Power

Frequency (MHz)	ISED Canada Rule Part	Mode	99% Bandwidth (kHz)
941.4875	RSS-119	mPass	5.7995
941.4875	RSS-119	mPass2	11.816
941.4875	RSS-119	m4Pass	6.0437
941.4875	RSS-119	m4Pass2	12.1614

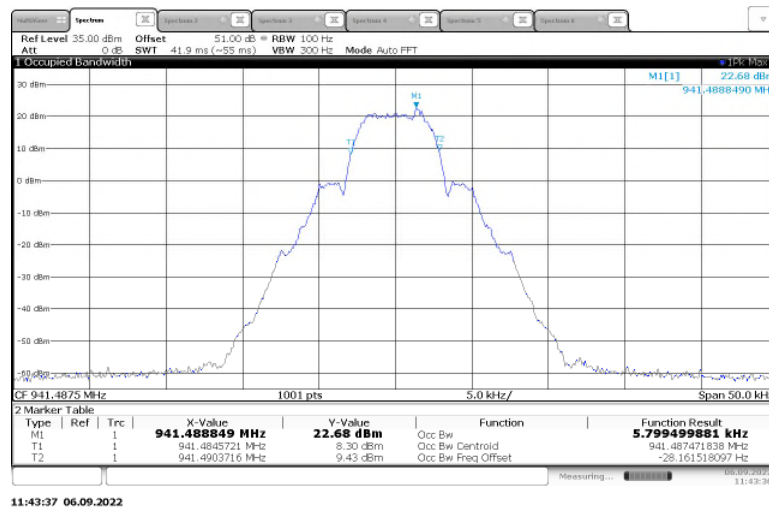


Figure 2.3.6-29: 99% Bandwidth – 941.4875 MHz - mPass – Low Power

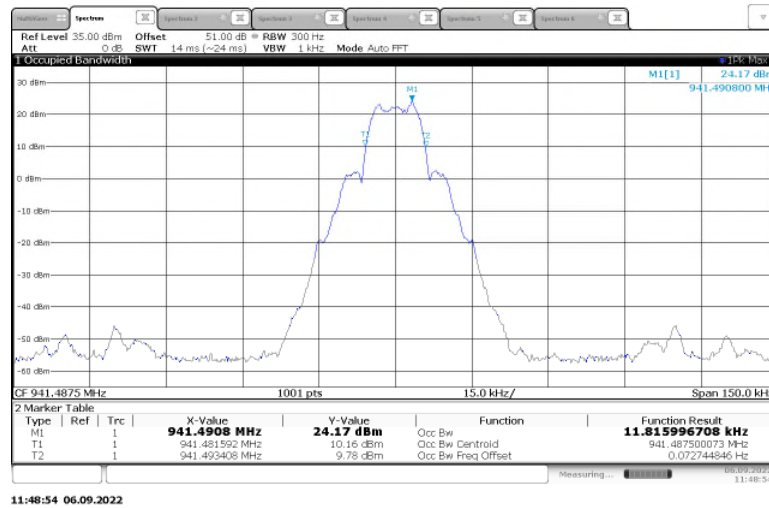


Figure 2.3.6-30: 99% Bandwidth – 941.4875 MHz - mPass2 – Low Power

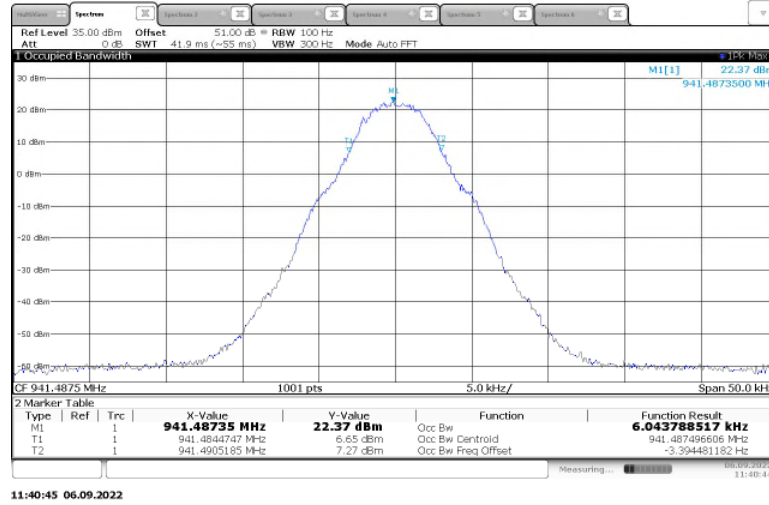


Figure 2.3.6-31: 99% Bandwidth – 941.4875 MHz - m4Pass – Low Power

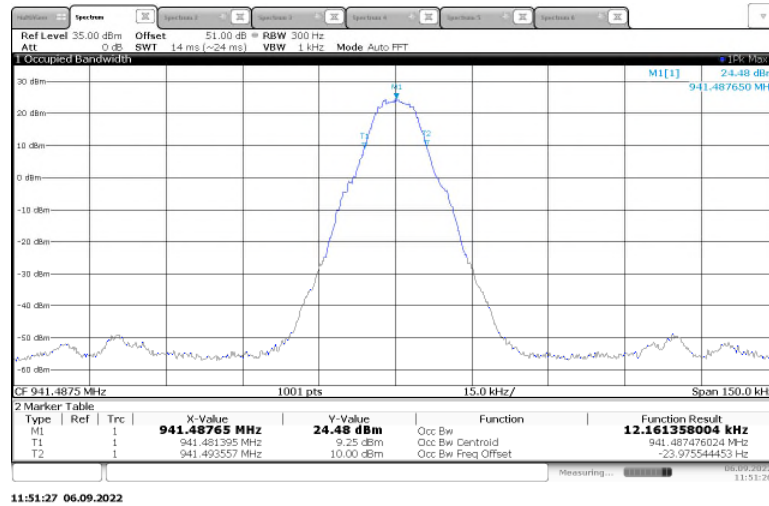


Figure 2.3.6-32: 99% Bandwidth – 941.4875 MHz - m4Pass2 – Low Power



Table 2.3.6-9: 99% Bandwidth – 952.5 MHz – Low Power

Frequency (MHz)	ISED Canada Rule Part	Mode	99% Bandwidth (kHz)
952.5	RSS-119	mPass	5.7949
952.5	RSS-119	mPass2	11.8205
952.5	RSS-119	m4Pass	6.0714
952.5	RSS-119	m4Pass2	12.1359

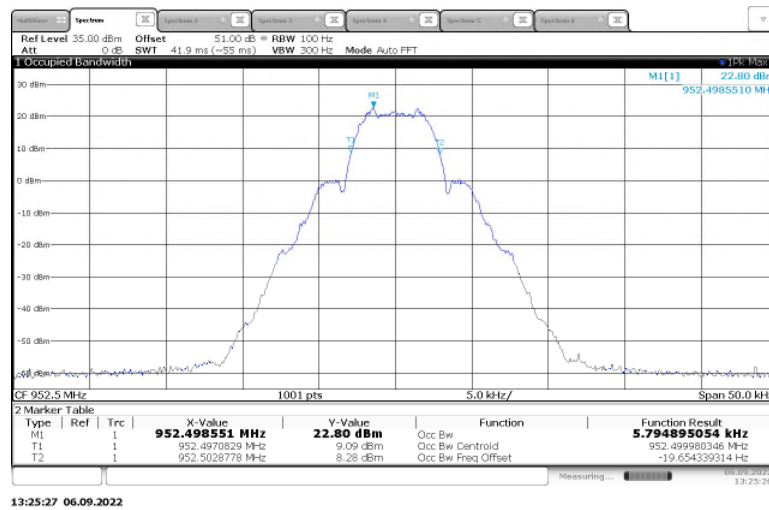


Figure 2.3.6-33: 99% Bandwidth – 952.5 MHz - mPass – Low Power

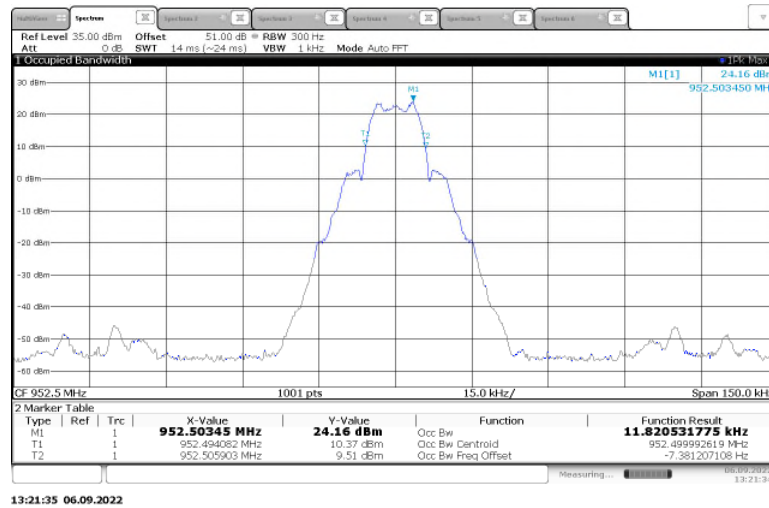


Figure 2.3.6-34: 99% Bandwidth – 952.5 MHz - mPass2 – Low Power

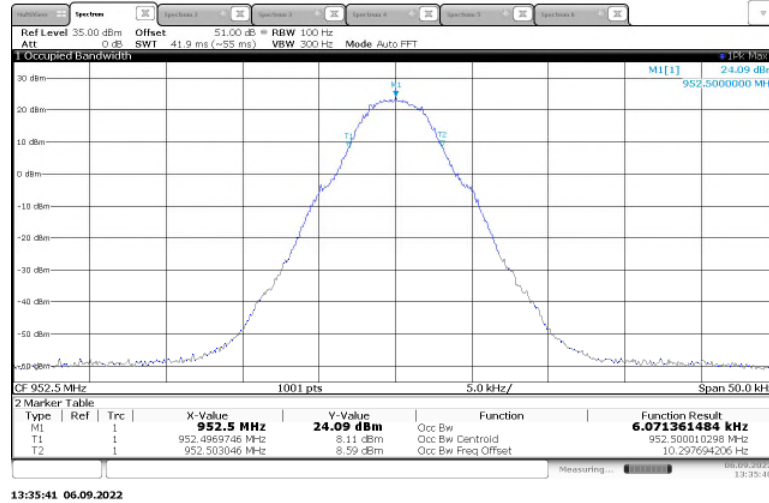


Figure 2.3.6-35: 99% Bandwidth – 952.5 MHz - m4Pass – Low Power

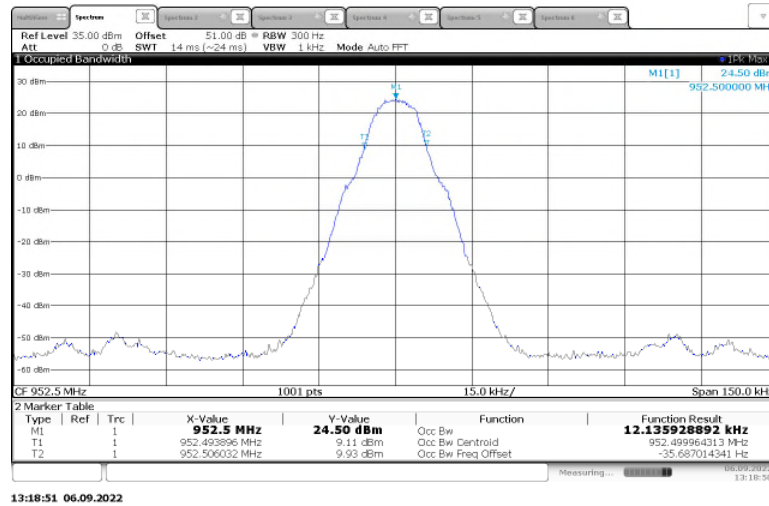


Figure 2.3.6-36: 99% Bandwidth – 952.5 MHz - m4Pass2 – Low Power



Table 2.3.6-10: 99% Bandwidth – 959.925 MHz – Low Power

Frequency (MHz)	ISED Canada Rule Part	Mode	99% Bandwidth (kHz)
959.925	RSS-119	mPass	5.8279
959.925	RSS-119	mPass2	11.81499
959.925	RSS-119	m4Pass	5.99588
959.925	RSS-119	m4Pass2	12.304

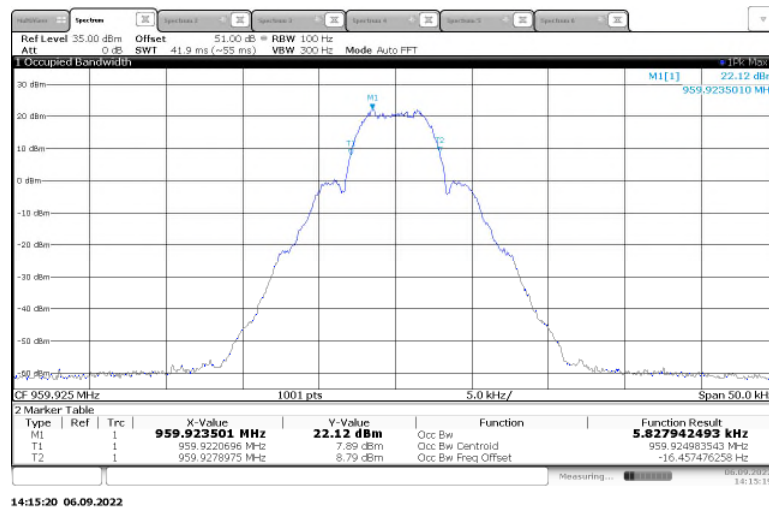


Figure 2.3.6-37: 99% Bandwidth – 959.925 MHz - mPass – Low Power

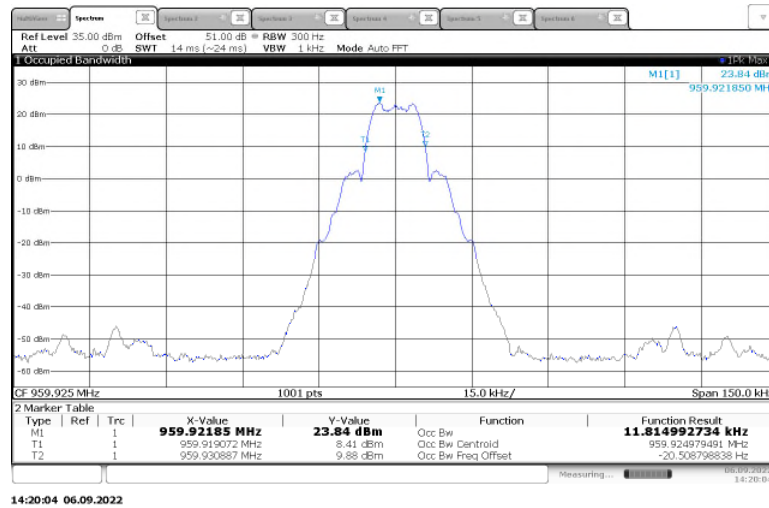


Figure 2.3.6-38: 99% Bandwidth – 959.925 MHz - mPass2 – Low Power

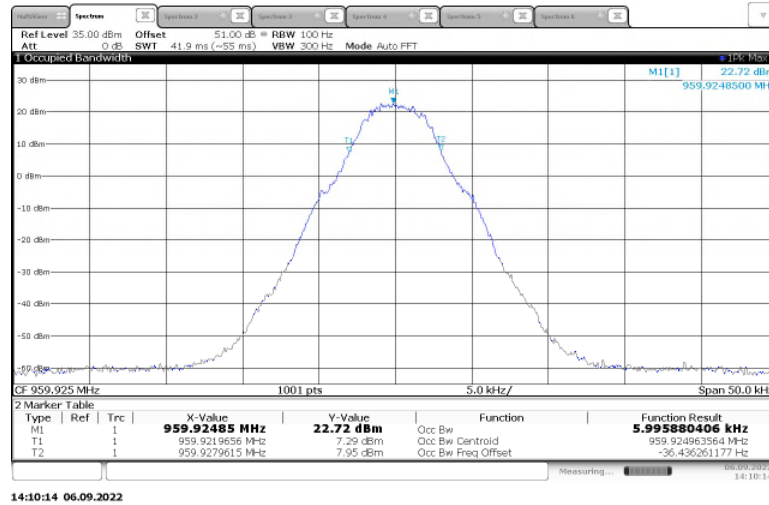


Figure 2.3.6-39: 99% Bandwidth – 959.925 MHz - m4Pass – Low Power

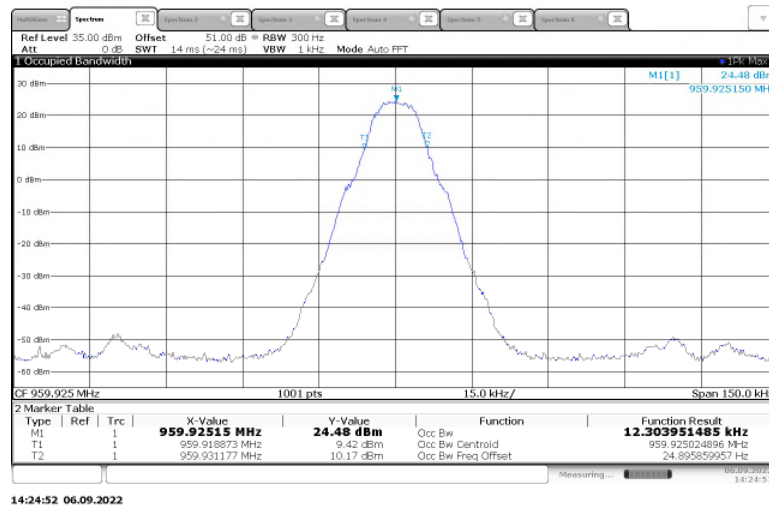


Figure 2.3.6-40: 99% Bandwidth – 959.925 MHz - m4Pass2 – Low Power



2.3.7 Test Location and Test Equipment Used

This test was carried out in TÜV SÜD America, Inc., 5610 W. Sligh Ave, Suite 100, Tampa, FL 33634, USA.

Instrument	Manufacturer	Type No	TE No	Software / Firmware Revision	Calibration Period (months)	Calibration Due
50ohms M/F 4GHz, 100W Attenuator	Fairview Microwave Inc.	SA4N100-20	615	N/A	12	25-Mar-2023
Duratest High Frequency Cable 26.5GHz	Teledyne Storm Products	921-0101-036	BEMC02112	N/A	12	20-Oct-2022
Atten 30dB N-M/F, DC, 18 GHz, 10W	Aeroflex Inmet	18N10W-30	DEMC3041	N/A	12	15-Jul-2023
Signal & Spectrum Analyzer	Rohde & Schwarz	FSW43	DEMC3085	2.90 SP1	12	07-Jun-2023

TU - Traceability Unscheduled
 O/P MON - Traceability Unscheduled
 N/A - Not Applicable
 NCR – No Calibration Required



2.4 Spurious Emissions at Antenna Terminals

2.4.1 Specification Reference

FCC 47 CFR Parts: 2.1053; 24.133 a(1), a(2); 101.111 a(6)
ISED Canada RSS-119 5.8.6; RSS-134 4.4

2.4.2 Equipment Under Test and Modification State

M420, SN: 1953335308
M420 PA, SN:420-48

2.4.3 Date of Test

2022-September-06

2.4.4 Test Method

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer through a 30 dB passive attenuator. The spectrum analyzer resolution bandwidth was set to 100 kHz below 1000 MHz and 1 MHz above 1000 MHz. The internal correction factors of the spectrum analyzer were employed to correct for any cable or attenuator. The spectrum was investigated in accordance with CFR 47 Part 2.1057.

2.4.5 Environmental Conditions

Ambient Temperature	21.7 °C
Relative Humidity	50 %
Atmospheric Pressure	1015 mbar

2.4.6 Test Results

DC Powered Operating



FCC Part 24.133a(1),(a2); ISED Canada RSS-134 4.4

High Power Mode

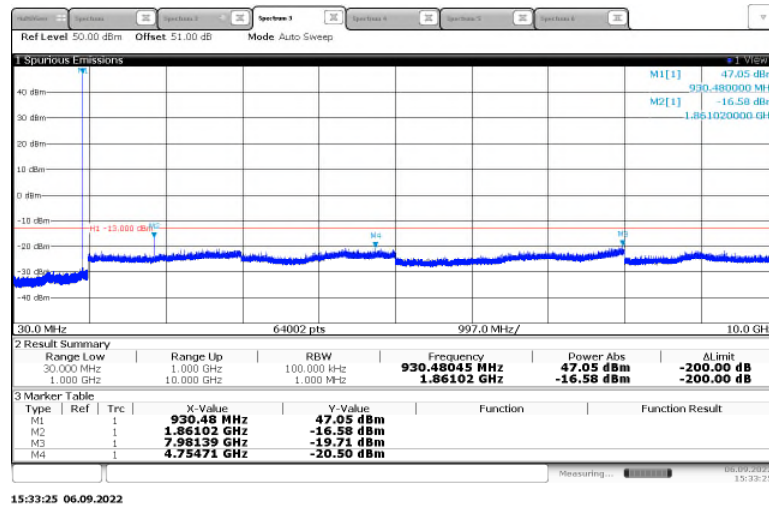


Figure 2.4.6-1: Transmitter Conducted Spurious Emissions – 930.5 MHz - mPass5k Mode – High Power

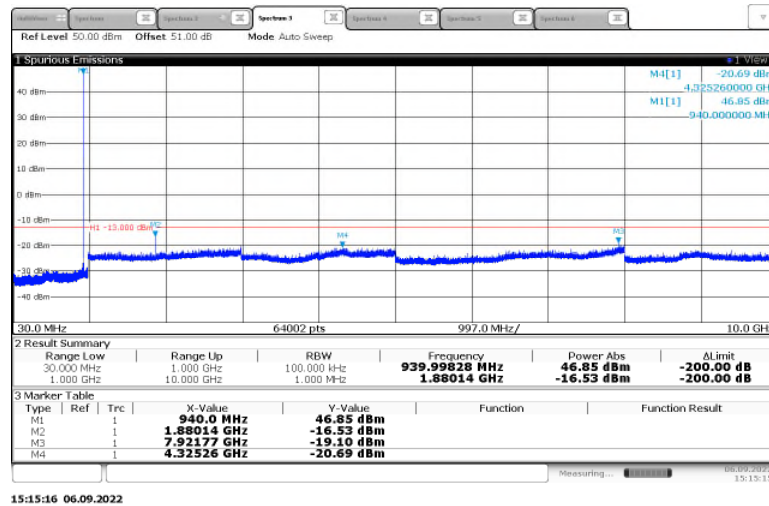


Figure 2.4.6-2: Transmitter Conducted Spurious Emissions – 940.0125 MHz - mPass5k Mode – High Power



Low Power Mode

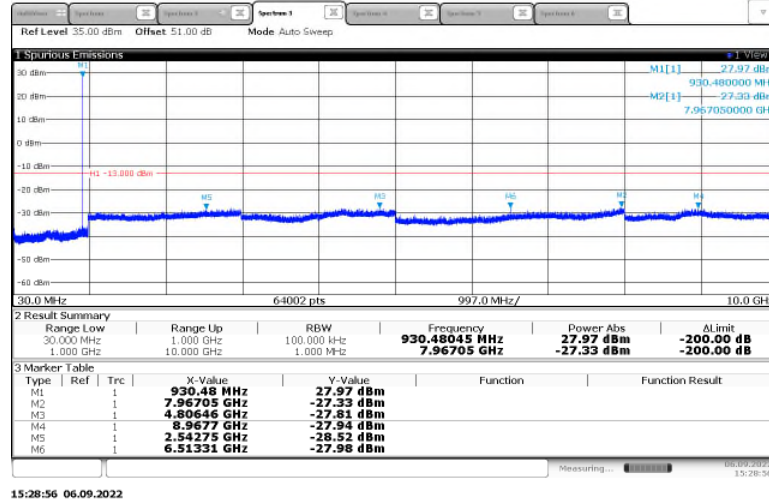


Figure 2.4.6-3: Transmitter Conducted Spurious Emissions – 930.5 MHz - mPass5k Mode – Low Power

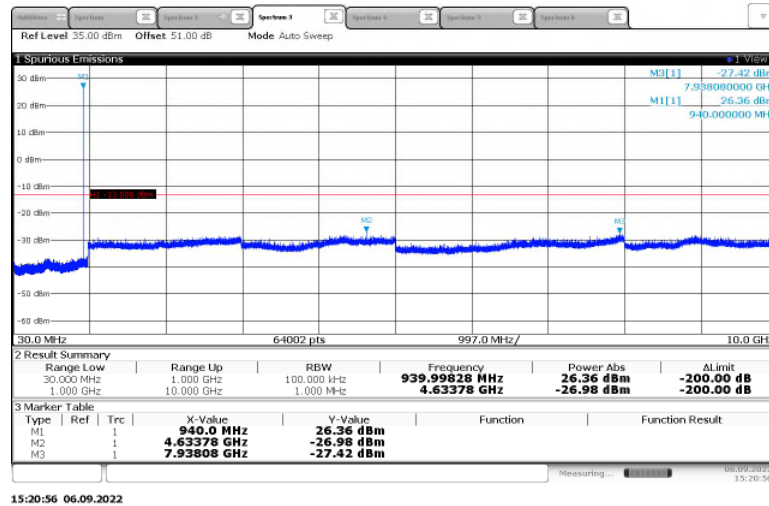


Figure 2.4.6-4: Transmitter Conducted Spurious Emissions – 940.0125 MHz - mPass5k Mode – Low Power



FCC 47 CFR Parts: 101.111 a(6); ISED Canada RSS-119 5.8.6

High Power Mode

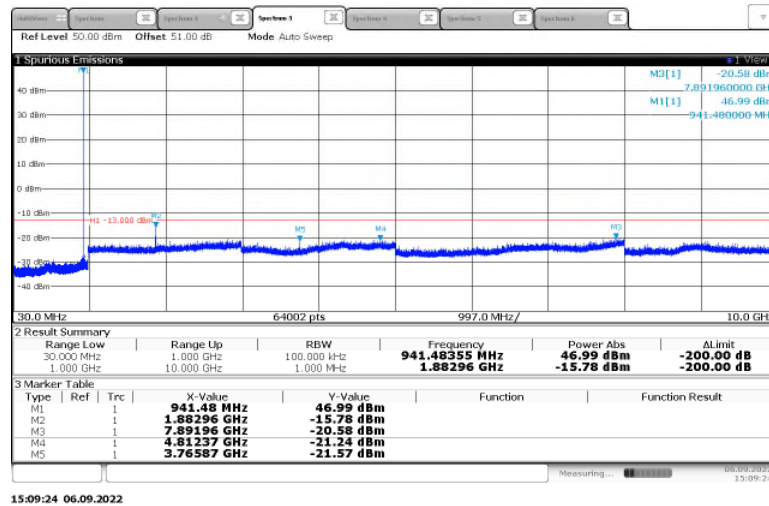


Figure 2.4.6-5: Transmitter Conducted Spurious Emissions – 941.4875 MHz - mPass5k Mode – High Power

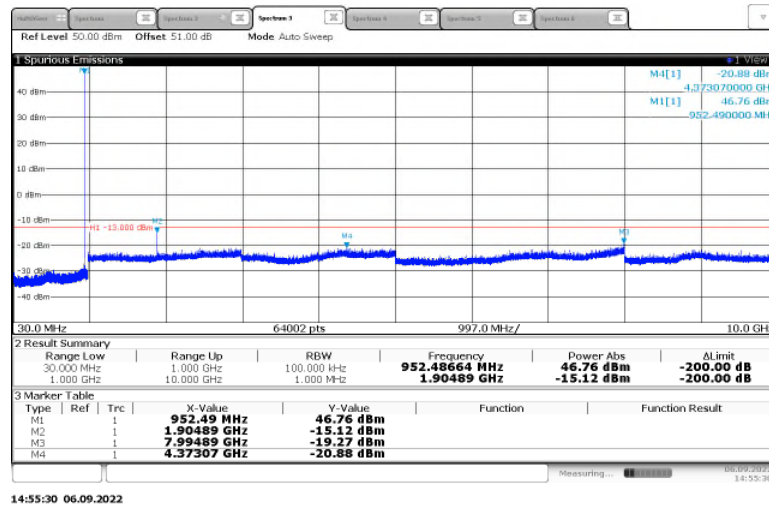


Figure 2.4.6-6: Transmitter Conducted Spurious Emissions – 952.5 MHz - mPass5k Mode – High Power

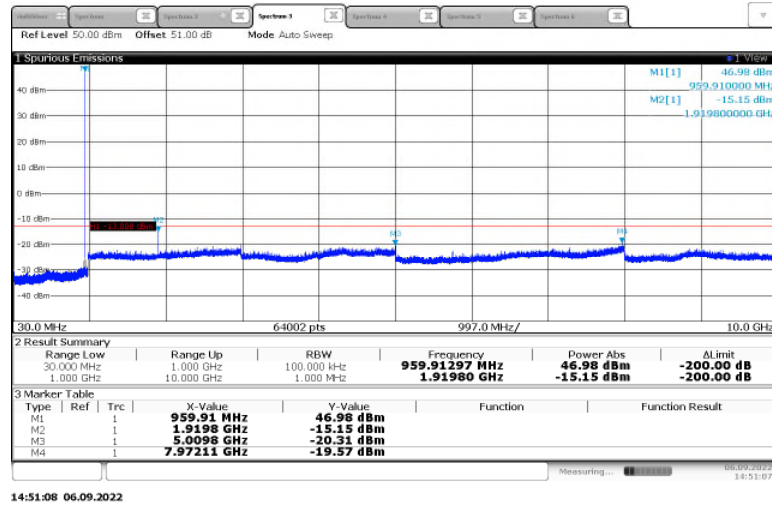


Figure 2.4.6-7: Transmitter Conducted Spurious Emissions – 959.925 MHz - mPass5k Mode – High Power



Low Power Mode

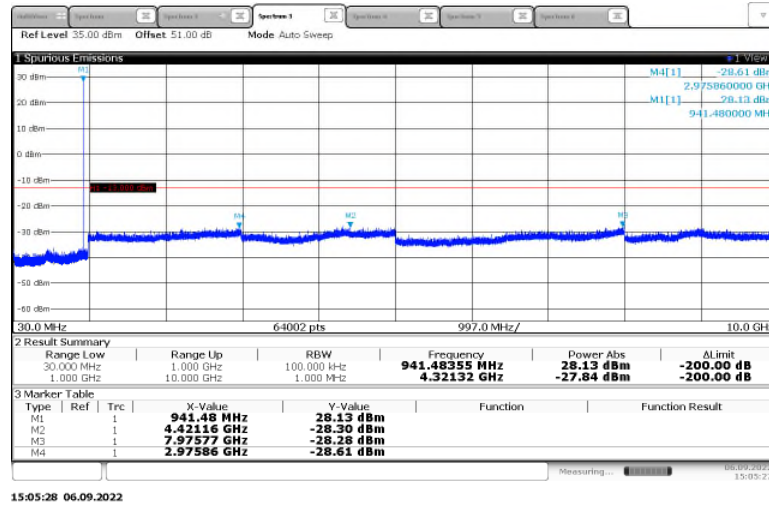


Figure 2.4.6-8: Transmitter Conducted Spurious Emissions – 941.4875 MHz - mPass5k Mode – Low Power

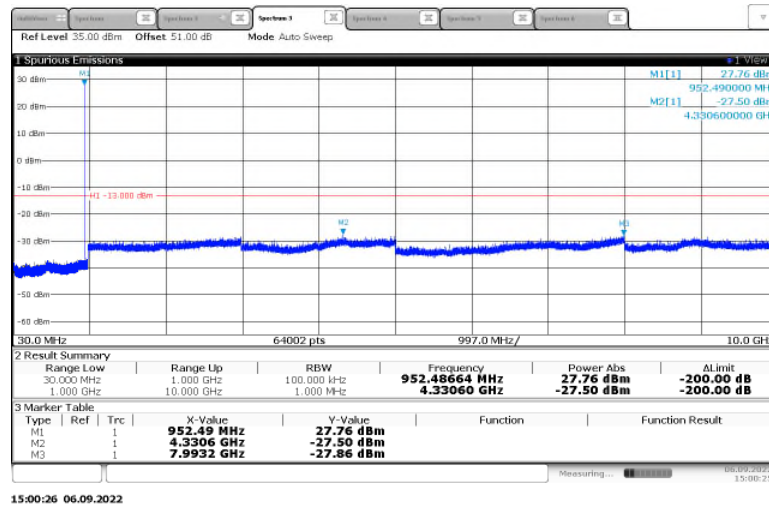


Figure 2.4.6-9: Transmitter Conducted Spurious Emissions – 952.5 MHz - mPass5k Mode – Low Power

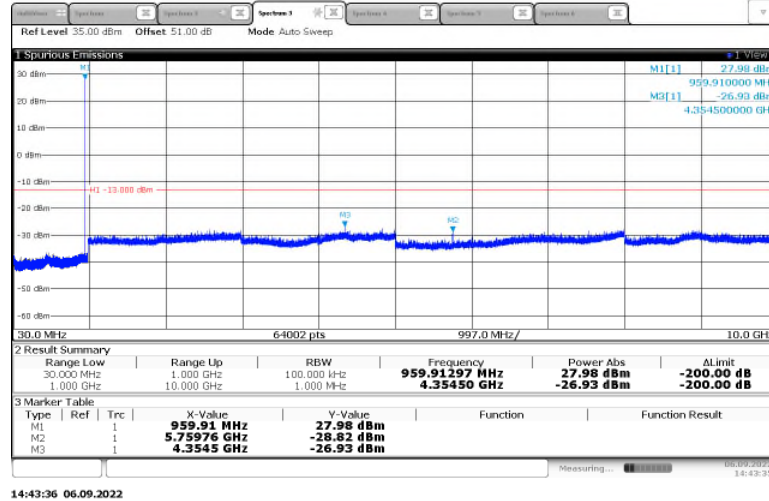


Figure 2.4.6-10: Transmitter Conducted Spurious Emissions – 959.925 MHz - mPass5k Mode – Low Power

2.4.7 Test Location and Test Equipment Used

This test was carried out in TÜV SÜD America, Inc., 5610 W. Sligh Ave, Suite 100, Tampa, FL 33634, USA.

Instrument	Manufacturer	Type No	TE No	Software / Firmware Revision	Calibration Period (months)	Calibration Due
50ohms M/F 4GHz, 100W Attenuator	Fairview Microwave Inc.	SA4N100-20	615	N/A	12	25-Mar-2023
Duratest High Frequency Cable 26.5GHz	Teledyne Storm Products	921-0101-036	BEMC02112	N/A	12	20-Oct-2022
Atten 30dB N-M/F, DC, 18 GHz, 10W	Aeroflex Inmet	18N10W-30	DEMC3041	N/A	12	15-Jul-2023
Signal & Spectrum Analyzer	Rohde & Schwarz	FSW43	DEMC3085	2.90 SP1	12	07-Jun-2023

TU - Traceability Unscheduled
 O/P MON - Traceability Unscheduled
 N/A - Not Applicable
 NCR – No Calibration Required



2.5 Field Strength of Spurious Radiation

2.5.1 Specification Reference

FCC 47 CFR Parts: 2.1053; 24.133 a(1), a(2); 101.111 a(6)
ISED Canada RSS-119 5.8.6; RSS-134 4.4

2.5.2 Equipment Under Test and Modification State

M420, SN: 1953335308
M420 PA, SN:420-48

2.5.3 Date of Test

2022-August-10 to 2022-September-26

2.5.4 Test Method

The EUT was evaluated in accordance to ANSI C63.26:2015 Section 5.5.3 Measurement of Spurious Emissions using Substitution Method.

The spectrum was investigated in accordance to FCC CFR 47 Part 2.1057. The equipment under test is placed in the Semi-Anechoic Chamber on a RF transparent table at the turntable center.

For measurements below 30 MHz, the receive antenna height was set to 1 m and the EUT was rotated through 360 degrees. Above 30 MHz, for each spurious emission, the antenna mast is raised and lowered from one (1) to four (4) meters and the turntable is rotated 360° and the maximum reading on the spectrum analyzer is recorded. This was repeated for both horizontal and vertical polarizations of the receive antenna.

The equipment under test is then replaced with a substitution antenna fed by a signal generator. The signal generator's frequency is set to that of the spurious emission recorded from the equipment under test. The antenna mast is raised and lowered from one (1) to four (4) meters to obtain a maximum reading on the spectrum analyzer. The output of the signal generator is then adjusted until the reading on the spectrum analyzer matches that obtained from the equipment under test. The signal generator level is recorded. The power in dBm of each spurious emission is calculated by correcting the signal generator level for the cable loss and gain of the substitution antenna referenced to a dipole.

The magnitude of all spurious emissions not reported were attenuated below the noise floor of the measurement system and therefore not specified in this report. Results are shown below.

2.5.5 Environmental Conditions

Ambient Temperature	21.7 °C
Relative Humidity	51 %
Atmospheric Pressure	1016 mbar



2.5.6 Test Results

DC Powered Operating

FCC Part 24.133a(1),(a2); ISED Canada RSS-134 4.4

High Power Mode

Table 2.5.6-1: Transmitter Radiated Spurious Emissions – 930.5 MHz – mPass5k Mode – High Power

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1861	-35.83	H	-33.31	-13.00	20.31
2791.5	-45.70	H	-41.49	-13.00	28.49
3722	-35.90	H	-28.98	-13.00	15.98
4652.5	-62.03	H	-59.47	-13.00	46.47
5583	-49.38	H	-39.19	-13.00	26.19
6513.5	-61.65	H	-53.35	-13.00	40.35
7444	-49.13	H	-32.03	-13.00	19.03
8374.5	-62.63	H	-55.57	-13.00	42.57
9305	-52.52	H	-38.54	-13.00	25.54
1861	-39.93	V	-35.92	-13.00	22.92
2791.5	-49.35	V	-46.11	-13.00	33.11
3722	-37.64	V	-30.18	-13.00	17.18
4652.5	-60.63	V	-56.93	-13.00	43.93
5583	-46.71	V	-35.87	-13.00	22.87
6513.5	-61.69	V	-53.94	-13.00	40.94
7444	-51.18	V	-35.07	-13.00	22.07
9305	-50.15	V	-35.80	-13.00	22.80



Table 2.5.6-2: Transmitter Radiated Spurious Emissions – 940.0125 MHz – mPass5k Mode – High Power

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1880.025	-36.31	H	-33.83	-13.00	20.83
2820.0375	-40.41	H	-35.53	-13.00	22.53
3760.05	-28.50	H	-21.54	-13.00	8.54
4700.0625	-53.17	H	-45.58	-13.00	32.58
5640.075	-36.46	H	-25.81	-13.00	12.81
6580.0875	-57.56	H	-47.15	-13.00	34.15
7520.1	-52.29	H	-36.76	-13.00	23.76
8460.1125	-54.66	H	-42.47	-13.00	29.47
9400.125	-48.85	H	-34.26	-13.00	21.26
1880.025	-47.51	V	-46.62	-13.00	33.62
2820.0375	-42.96	V	-38.54	-13.00	25.54
3760.05	-26.54	V	-19.72	-13.00	6.72
4700.0625	-52.34	V	-44.11	-13.00	31.11
5640.075	-36.58	V	-25.32	-13.00	12.32
6580.0875	-55.04	V	-43.82	-13.00	30.82
7520.1	-57.38	V	-45.86	-13.00	32.86
8460.1125	-57.13	V	-46.56	-13.00	33.56
9400.125	-44.96	V	-30.21	-13.00	17.21



Low Power Mode

Table 2.5.6-3: Transmitter Radiated Spurious Emissions – 930.5 MHz – mPass5k Mode – Low Power

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1861	-58.15	H	-61.62	-13.00	48.62
2791.5	-57.49	H	-58.32	-13.00	45.32
3722	-43.90	H	-37.73	-13.00	24.73
4652.5	-57.49	H	-51.99	-13.00	38.99
5583	-43.72	H	-32.98	-13.00	19.98
6513.5	-54.08	H	-42.96	-13.00	29.96
7444	-53.80	H	-37.85	-13.00	24.85
8374.5	-59.42	H	-48.57	-13.00	35.57
9305	-61.38	H	-51.93	-13.00	38.93
1861	-58.09	V	-59.76	-13.00	46.76
2791.5	-56.80	V	-56.59	-13.00	43.59
3722	-41.57	V	-34.60	-13.00	21.60
4652.5	-58.12	V	-52.30	-13.00	39.30
5583	-46.93	V	-36.09	-13.00	23.09
6513.5	-54.31	V	-43.00	-13.00	30.00
7444	-53.14	V	-38.02	-13.00	25.02
8374.5	-60.84	V	-52.02	-13.00	39.02
9305	-60.37	V	-50.16	-13.00	37.16



Table 2.5.6-4: Transmitter Radiated Spurious Emissions – 940.0125 MHz – mPass5k Mode – Low Power

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1880.025	-50.79	H	-50.17	-13.00	37.17
2820.0375	-49.87	H	-46.34	-13.00	33.34
3760.05	-40.15	H	-33.89	-13.00	20.89
4700.0625	-50.47	H	-42.08	-13.00	29.08
5640.075	-46.88	H	-37.07	-13.00	24.07
6580.0875	-53.89	H	-42.11	-13.00	29.11
7520.1	-50.83	H	-35.22	-13.00	22.22
8460.1125	-50.61	H	-37.60	-13.00	24.60
9400.125	-60.51	H	-50.20	-13.00	37.20
1880.025	-56.89	V	-59.29	-13.00	46.29
2820.0375	-51.77	V	-48.95	-13.00	35.95
3760.05	-39.69	V	-33.21	-13.00	20.21
4700.0625	-51.67	V	-43.42	-13.00	30.42
5640.075	-46.72	V	-36.44	-13.00	23.44
6580.0875	-50.81	V	-38.72	-13.00	25.72
7520.1	-53.92	V	-40.44	-13.00	27.44
8460.1125	-52.63	V	-40.73	-13.00	27.73
9400.125	-56.67	V	-44.45	-13.00	31.45



FCC 47 CFR Parts: 101.111 a(6); ISED Canada RSS-119 5.8.6

High Power Mode

Table 2.5.6-5: Transmitter Radiated Spurious Emissions – 941.4875 MHz – mPass5k Mode – High Power

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1882.975	-47.32	H	-46.33	-13.00	33.33
2824.4625	-42.47	H	-37.98	-13.00	24.98
3765.95	-29.50	H	-22.51	-13.00	9.51
4707.4375	-58.11	H	-52.80	-13.00	39.80
5648.925	-52.85	H	-43.76	-13.00	30.76
6590.4125	-57.41	H	-46.84	-13.00	33.84
7531.9	-49.51	H	-34.11	-13.00	21.11
8473.3875	-59.51	H	-49.97	-13.00	36.97
9414.875	-56.30	H	-43.79	-13.00	30.79
1882.975	-43.74	V	-41.40	-13.00	28.40
2824.4625	-44.25	V	-40.20	-13.00	27.20
3765.95	-37.54	V	-29.77	-13.00	16.77
4707.4375	-54.26	V	-46.71	-13.00	33.71
5648.925	-51.35	V	-41.06	-13.00	28.06
6590.4125	-52.23	V	-39.19	-13.00	26.19
7531.9	-50.85	V	-35.70	-13.00	22.70
8473.3875	-59.74	V	-49.89	-13.00	36.89
9414.875	-49.98	V	-36.08	-13.00	23.08



Table 2.5.6-6: Transmitter Radiated Spurious Emissions – 952.5 MHz – mPass5k Mode – High Power

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1905	-51.93	H	-51.24	-13.00	38.24
2857.5	-35.89	H	-30.76	-13.00	17.76
3810	-29.85	H	-22.43	-13.00	9.43
4762.5	-47.75	H	-38.78	-13.00	25.78
5715	-43.43	H	-32.38	-13.00	19.38
6667.5	-54.11	H	-42.86	-13.00	29.86
7620	-59.94	H	-49.19	-13.00	36.19
8572.5	-52.93	H	-39.63	-13.00	26.63
9525	-46.26	H	-32.12	-13.00	19.12
1905	-54.03	V	-54.82	-13.00	41.82
2857.5	-38.82	V	-34.12	-13.00	21.12
3810	-29.79	V	-22.29	-13.00	9.29
4762.5	-48.30	V	-39.60	-13.00	26.60
5715	-39.69	V	-27.98	-13.00	14.98
6667.5	-52.89	V	-40.98	-13.00	27.98
7620	-60.87	V	-51.32	-13.00	38.32
8572.5	-53.69	V	-40.76	-13.00	27.76
9525	-44.59	V	-30.35	-13.00	17.35



Table 2.5.6-7: Transmitter Radiated Spurious Emissions – 959.925 MHz – mPass5k Mode – High Power

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1919.85	-48.47	H	-46.92	-13.00	33.92
2879.775	-38.62	H	-33.51	-13.00	20.51
3839.7	-36.01	H	-28.61	-13.00	15.61
4799.625	-46.67	H	-37.14	-13.00	24.14
5759.55	-42.96	H	-31.79	-13.00	18.79
6719.475	-55.56	H	-44.53	-13.00	31.53
7679.4	-57.68	H	-47.01	-13.00	34.01
8639.325	-47.87	H	-33.95	-13.00	20.95
9599.25	-49.02	H	-35.05	-13.00	22.05
1919.85	-50.26	V	-49.27	-13.00	36.27
2879.775	-39.70	V	-34.26	-13.00	21.26
3839.7	-36.04	V	-28.54	-13.00	15.54
4799.625	-47.16	V	-37.61	-13.00	24.61
5759.55	-39.28	V	-27.60	-13.00	14.60
6719.475	-52.72	V	-41.09	-13.00	28.09
7679.4	-59.72	V	-50.30	-13.00	37.30
8639.325	-50.57	V	-37.65	-13.00	24.65
9599.25	-46.79	V	-32.32	-13.00	19.32



Low Power Mode

Table 2.5.6-8: Transmitter Radiated Spurious Emissions – 941.4875 MHz – mPass5k Mode – Low Power

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1882.975	-54.21	H	-55.08	-13.00	42.08
2824.4625	-50.20	H	-47.13	-13.00	34.13
3765.95	-39.85	H	-33.43	-13.00	20.43
4707.4375	-55.26	H	-48.25	-13.00	35.25
5648.925	-43.14	H	-32.63	-13.00	19.63
6590.4125	-56.81	H	-45.33	-13.00	32.33
7531.9	-52.09	H	-37.07	-13.00	24.07
8473.3875	-53.93	H	-40.97	-13.00	27.97
9414.875	-61.64	H	-52.00	-13.00	39.00
1882.975	-57.26	V	-59.65	-13.00	46.65
2824.4625	-52.90	V	-50.29	-13.00	37.29
3765.95	-37.21	V	-29.44	-13.00	16.44
4707.4375	-51.58	V	-42.86	-13.00	29.86
5648.925	-42.39	V	-30.89	-13.00	17.89
6590.4125	-51.51	V	-38.45	-13.00	25.45
7531.9	-52.00	V	-41.13	-13.00	28.13
8473.3875	-57.23	V	-45.83	-13.00	32.83
9414.875	-62.11	V	-54.45	-13.00	41.45



Table 2.5.6-9: Transmitter Radiated Spurious Emissions – 952.5 MHz – mPass5k Mode – Low Power

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1905	-57.14	H	-59.80	-13.00	46.80
2857.5	-47.65	H	-43.73	-13.00	30.73
3810	-40.09	H	-33.24	-13.00	20.24
4762.5	-48.24	H	-39.42	-13.00	26.42
5715	-44.59	H	-33.53	-13.00	20.53
6667.5	-53.94	H	-42.46	-13.00	29.46
7620	-58.71	H	-47.94	-13.00	34.94
8572.5	-54.65	H	-41.73	-13.00	28.73
9525	-64.01	H	-58.62	-13.00	45.62
1905	-56.96	V	-59.22	-13.00	46.22
2857.5	-48.57	V	-45.16	-13.00	32.16
3810	-40.50	V	-33.70	-13.00	20.70
4762.5	-48.85	V	-40.15	-13.00	27.15
5715	-42.62	V	-31.14	-13.00	18.14
6667.5	-49.49	V	-37.20	-13.00	24.20
7620	-57.38	V	-46.06	-13.00	33.06
8572.5	-53.87	V	-40.94	-13.00	27.94
9525	-62.28	V	-53.93	-13.00	40.93



Table 2.5.6-10: Transmitter Radiated Spurious Emissions – 959.925 MHz – mPass5k Mode – Low Power

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1919.85	-49.65	H	-48.22	-13.00	35.22
2879.775	-48.97	H	-45.04	-13.00	32.04
3839.7	-45.44	H	-38.94	-13.00	25.94
4799.625	-48.43	H	-39.21	-13.00	26.21
5759.55	-48.36	H	-37.68	-13.00	24.68
6719.475	-54.46	H	-43.30	-13.00	30.30
7679.4	-59.06	H	-48.44	-13.00	35.44
8639.325	-49.37	H	-36.10	-13.00	23.10
9599.25	-61.90	H	-51.89	-13.00	38.89
1919.85	-51.22	V	-50.05	-13.00	37.05
2879.775	-48.37	V	-44.50	-13.00	31.50
3839.7	-44.36	V	-37.70	-13.00	24.70
4799.625	-49.71	V	-40.37	-13.00	27.37
5759.55	-44.32	V	-33.21	-13.00	20.21
6719.475	-51.15	V	-38.82	-13.00	25.82
7679.4	-59.07	V	-49.65	-13.00	36.65
8639.325	-52.90	V	-40.33	-13.00	27.33
9599.25	-62.55	V	-54.20	-13.00	41.20

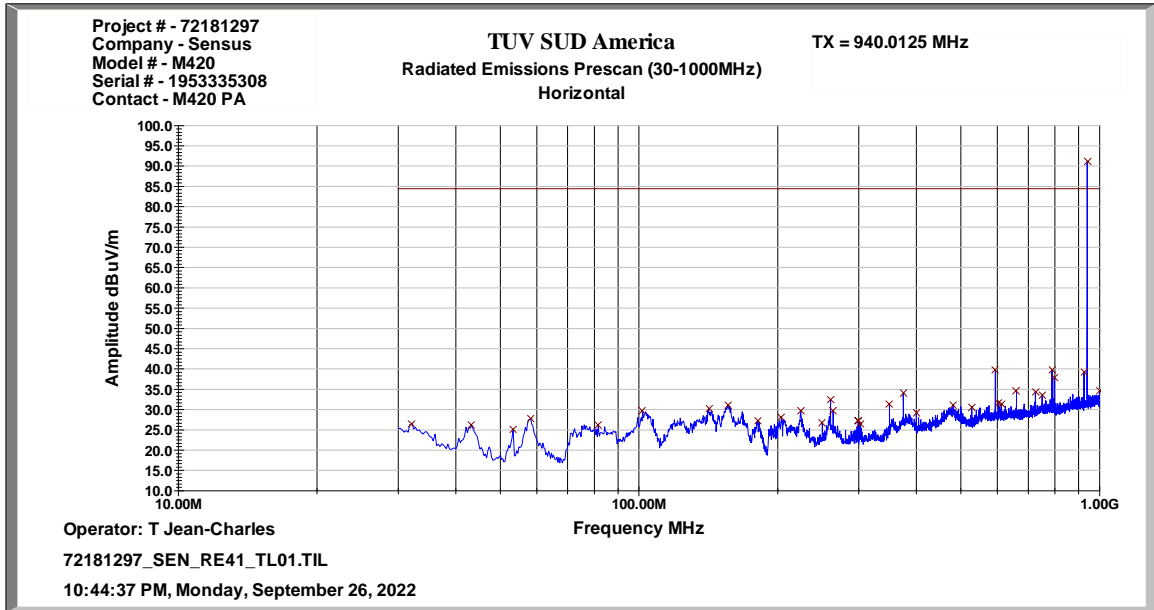


Figure 2.5.6-1: Transmitter Radiated Spurious Emissions – 952.5 MHz - mPass5k Mode – 30 MHz – 1 GHz – Horizontal Polarization

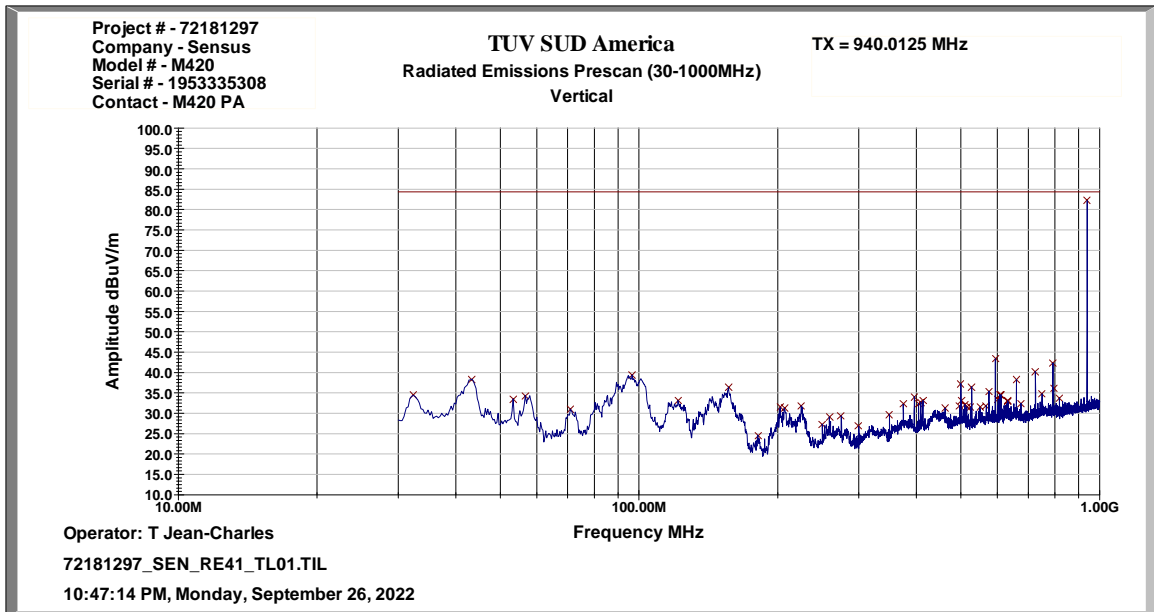


Figure 2.5.6-2: Transmitter Radiated Spurious Emissions – 952.5 MHz - mPass5k Mode – 30 MHz – 1 GHz – Vertical Polarization

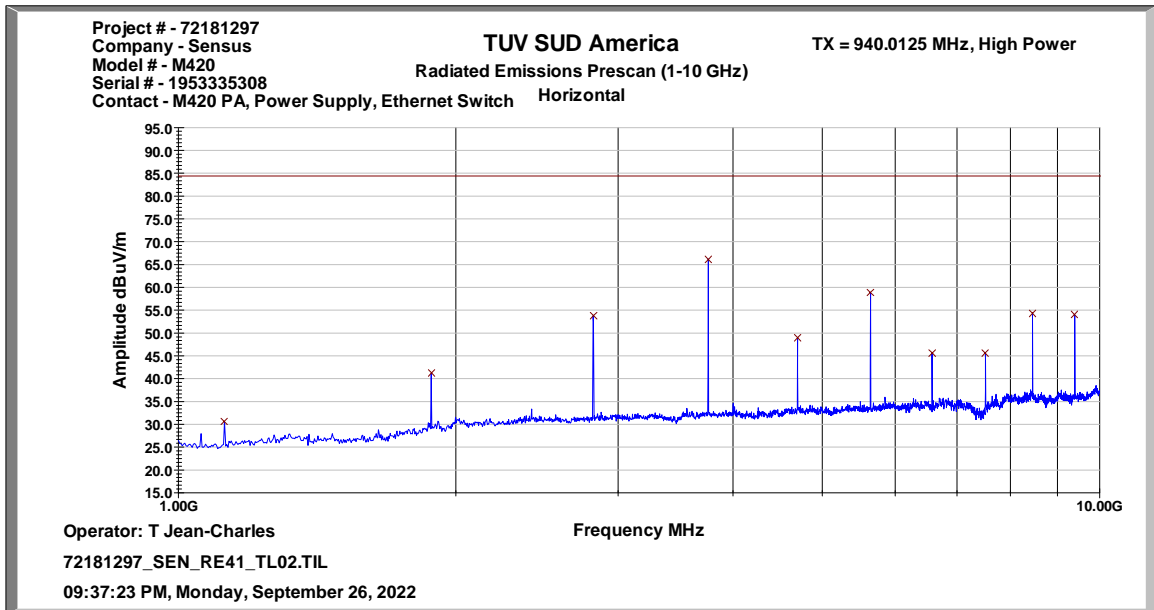


Figure 2.5.6-3: Transmitter Radiated Spurious Emissions – 952.5 MHz - mPass5k Mode – 1 GHz – 10 GHz – Horizontal Polarization

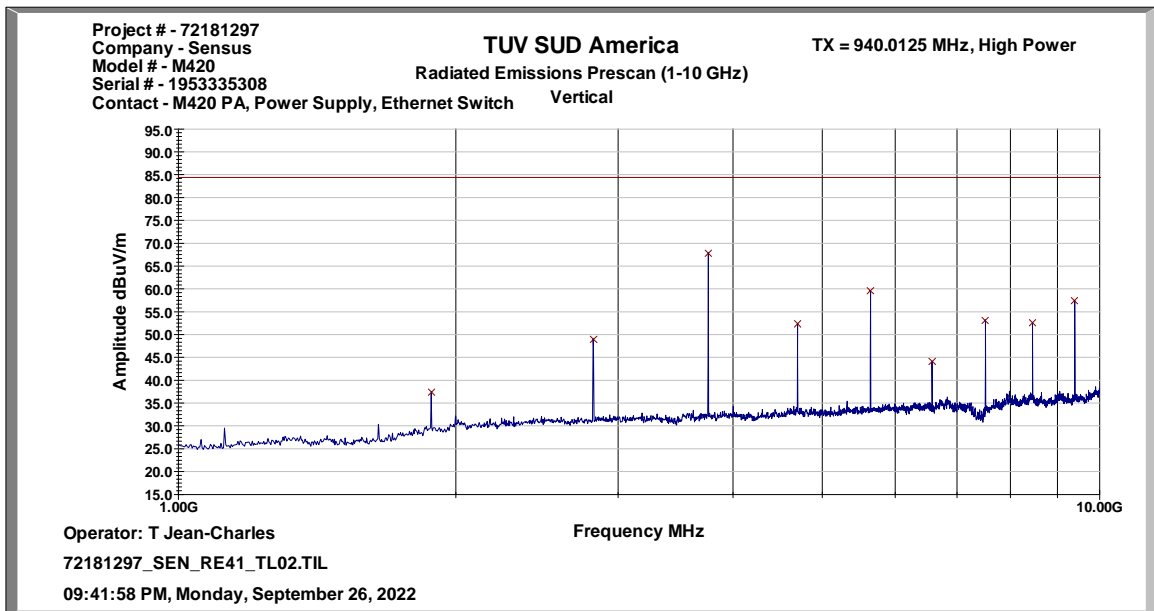


Figure 2.5.6-4: Transmitter Radiated Spurious Emissions – 952.5 MHz - mPass5k Mode – 1 GHz – 10 GHz – Vertical Polarization



2.5.7 Test Location and Test Equipment Used

This test was carried out in TÜV SÜD America, Inc., 5610 W. Sligh Ave, Suite 100, Tampa, FL 33634, USA.

Instrument	Manufacturer	Type No	TE No	Software / Firmware Revision	Calibration Period (months)	Calibration Due
100Hz-26.5GHz EMC analyzer/HYZ	Agilent	E7405A	BEMC00523	A.14.06	12	01-Feb-2023
Linear Polarized Horn antenna, 1-18 GHz	EMCO	3115	BEMC02006	N/A	24	10-Feb-2024
Tile Automation Software	ETS Lindgren	TILE4! - Version 4.2.A	BEMC02095	4.2A	N/A	NCR
Synthesized Signal Generator 0.05 - 26 GHz	Hewlett Packard	8673D	BEMC02126	N/A	24	07-Jun-2024
PE-P160 40 GHz Cable	Pasternack	PE360-396	BEMC02147	N/A	12	23-Jun-2023
BI LOG PERIODIC, ANTENNA	Schaffner	CBL6112B	TEMC00005	N/A	24	01-Nov-2023
EMC Chamber	Panashield	N/A	TEMC00031	N/A	36	28-Jan-2024
Double Ridge Guide Horn	ETS Lindgren	3117	TEMC00061	N/A	24	11-Feb-2024
Microwave Preampfier	Com-Power Corporation	PAM-118A	TEMC00160	N/A	12	26-Mar-2023
A81-0303 18 GHz Cable Set	Teledyne Storm Products	A81-0303-360/96	TEMC00201	N/A	12	26-Mar-2023

TU - Traceability Unscheduled
 O/P MON - Traceability Unscheduled
 N/A - Not Applicable
 NCR – No Calibration Required



2.6 Frequency Stability

2.6.1 Specification Reference

FCC 47 CFR Parts: 2.1055; 24.135; 101.107
 ISED Canada RSS-Gen 6.11; RSS-119 5.3; RSS-134 4.5

2.6.2 Equipment Under Test and Modification State

M420, SN: 1953335308
 M420 PA, SN:420-48

2.6.3 Date of Test

2022-August-08 to 2022-August-09

2.6.4 Test Method

The equipment under test is placed inside an environmental chamber. The RF output is directly coupled to the input of the measurement equipment and a power supply is attached to the primary supply voltage.

Frequency measurements were made at the extremes of the of temperature range -30° C to +50° C and at intervals of 10° C at normal supply voltage. Sufficient time to stabilize all components of the equipment was allowed at each frequency measurement. At a temperature 20° C the supply voltage was reduced to the battery operating endpoint. The maximum variation of frequency was recorded.

2.6.5 Environmental Conditions

Ambient Temperature 21.9 °C
 Relative Humidity 52 %
 Atmospheric Pressure 1018 mbar

2.6.6 Test Results

DC Powered Operating

Frequency Range MHz	FCC Rule Part	ISED Canada	Limit ppm
930 - 931	24.135	RSS-134 4.5	1.0
940 - 941	24.135	RSS-134 4.5	1.0
941 – 941.5	101.107	RSS-119 5.3	1.5
952 – 953	101.107	RSS-119 5.3	5.0
959.85 - 960	101.107	N/A	5.0

Note: The more stringent limit of +/- 1 ppm was used across all bands.



FCC 47 CFR Parts: 24.135; ISED Canada RSS-134 4.5

Frequency Stability

Frequency (MHz): 930.499970

Deviation Limit (PPM): 1

Nominal Voltage (VDC): 24

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	930.500380	0.440	100%	24.00
-20 C	930.500232	0.281	100%	24.00
-10 C	930.500180	0.225	100%	24.00
0 C	930.500050	0.086	100%	24.00
10 C	930.500056	0.092	100%	24.00
20 C	930.499970	0.000	100%	24.00
30 C	930.500070	0.107	100%	24.00
40 C	930.500060	0.097	100%	24.00
50 C	930.499898	-0.077	100%	24.00
20 C	930.499970	0.000	85%	20.40
20 C	930.499984	0.015	115%	27.60

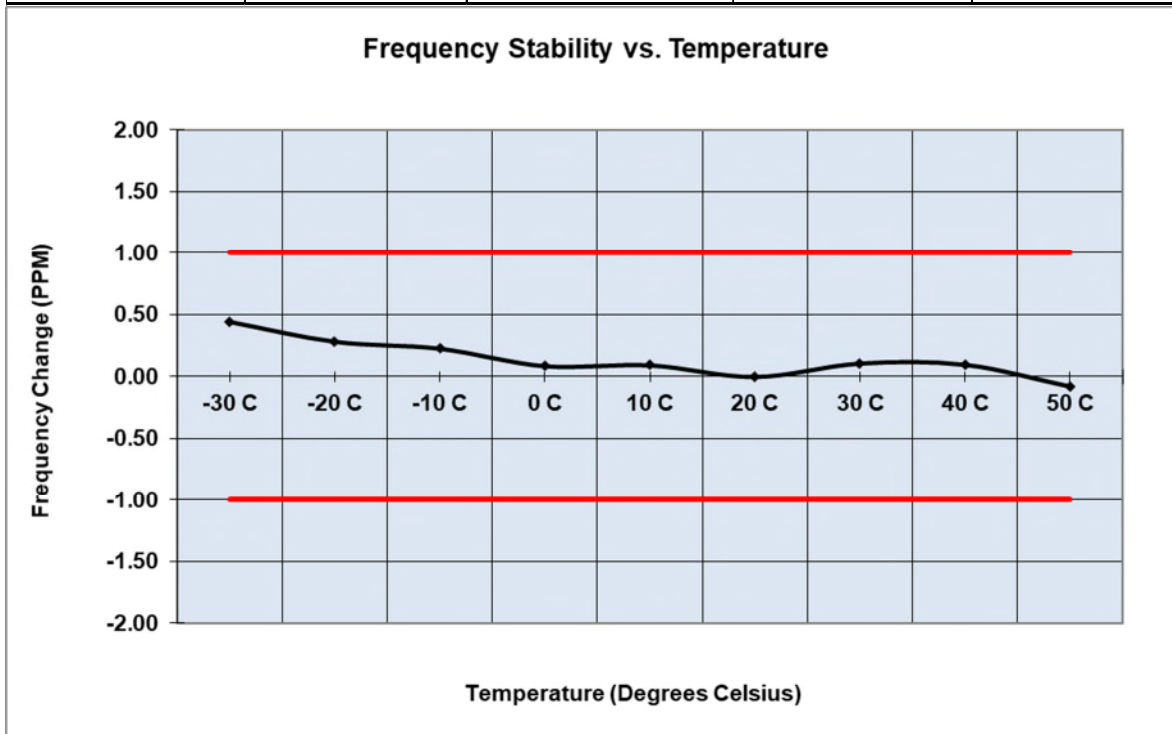


Figure 2.6.6-1: Frequency Stability – 930.5 MHz – High Power



Frequency Stability

Frequency (MHz): 940.012470
 Deviation Limit (PPM): 1
 Nominal Voltage (VDC): 24

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	940.012828	0.380	100%	24.00
-20 C	940.012698	0.242	100%	24.00
-10 C	940.012708	0.253	100%	24.00
0 C	940.012552	0.087	100%	24.00
10 C	940.012526	0.060	100%	24.00
20 C	940.012470	0.000	100%	24.00
30 C	940.012552	0.087	100%	24.00
40 C	940.012556	0.091	100%	24.00
50 C	940.012348	-0.130	100%	24.00
20 C	940.012486	0.017	85%	20.40
20 C	940.012490	0.021	115%	27.60

Frequency Stability vs. Temperature

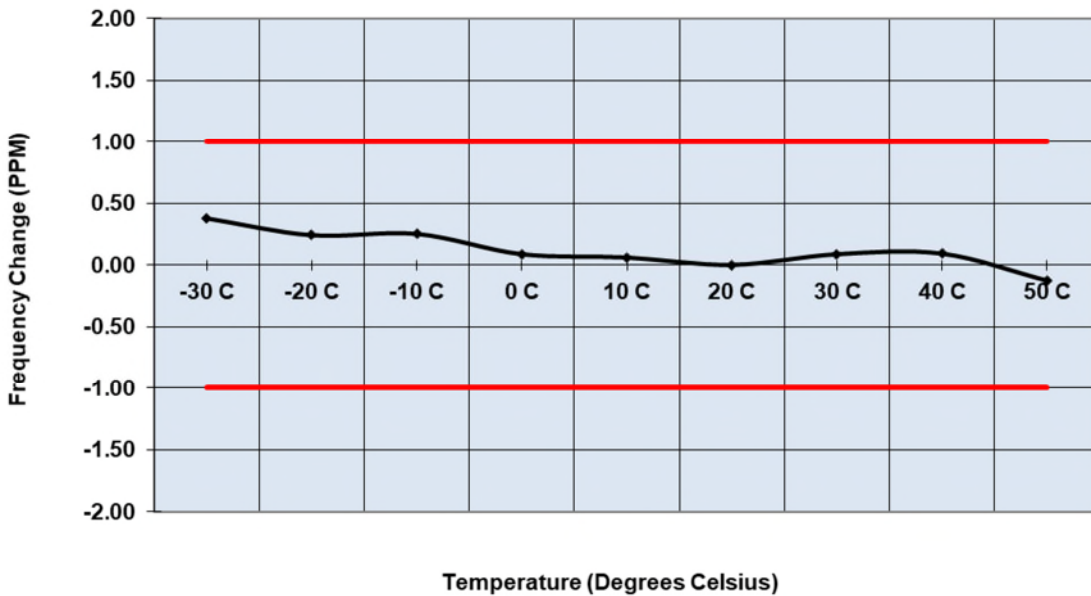


Figure 2.6.6-2: Frequency Stability – 940.0125 MHz – High Power



Frequency Stability

Frequency (MHz): 930.499982
 Deviation Limit (PPM): 1
 Nominal Voltage (VDC): 24

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	930.500310	0.352	100%	24.00
-20 C	930.500204	0.238	100%	24.00
-10 C	930.500178	0.210	100%	24.00
0 C	930.500030	0.052	100%	24.00
10 C	930.500038	0.060	100%	24.00
20 C	930.499982	0.000	100%	24.00
30 C	930.500070	0.094	100%	24.00
40 C	930.500058	0.082	100%	24.00
50 C	930.499894	-0.094	100%	24.00
20 C	930.499954	-0.030	85%	20.40
20 C	930.499998	0.017	115%	27.60

Frequency Stability vs. Temperature

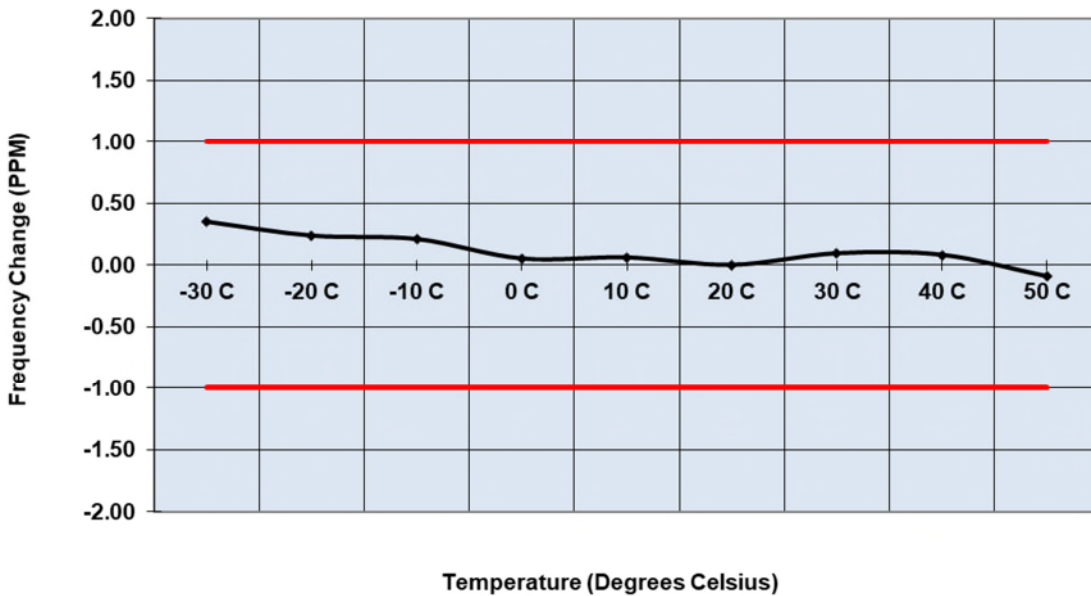


Figure 2.6.6-3: Frequency Stability – 930.5 MHz – Low Power



Frequency Stability

Frequency (MHz): 940.012482
 Deviation Limit (PPM): 1
 Nominal Voltage (VDC): 24

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	940.012822	0.361	100%	24.00
-20 C	940.012690	0.221	100%	24.00
-10 C	940.012702	0.234	100%	24.00
0 C	940.012558	0.081	100%	24.00
10 C	940.012508	0.028	100%	24.00
20 C	940.012482	0.000	100%	24.00
30 C	940.012570	0.094	100%	24.00
40 C	940.012598	0.123	100%	24.00
50 C	940.012350	-0.140	100%	24.00
20 C	940.012486	0.004	85%	20.40
20 C	940.012490	0.008	115%	27.60

Frequency Stability vs. Temperature

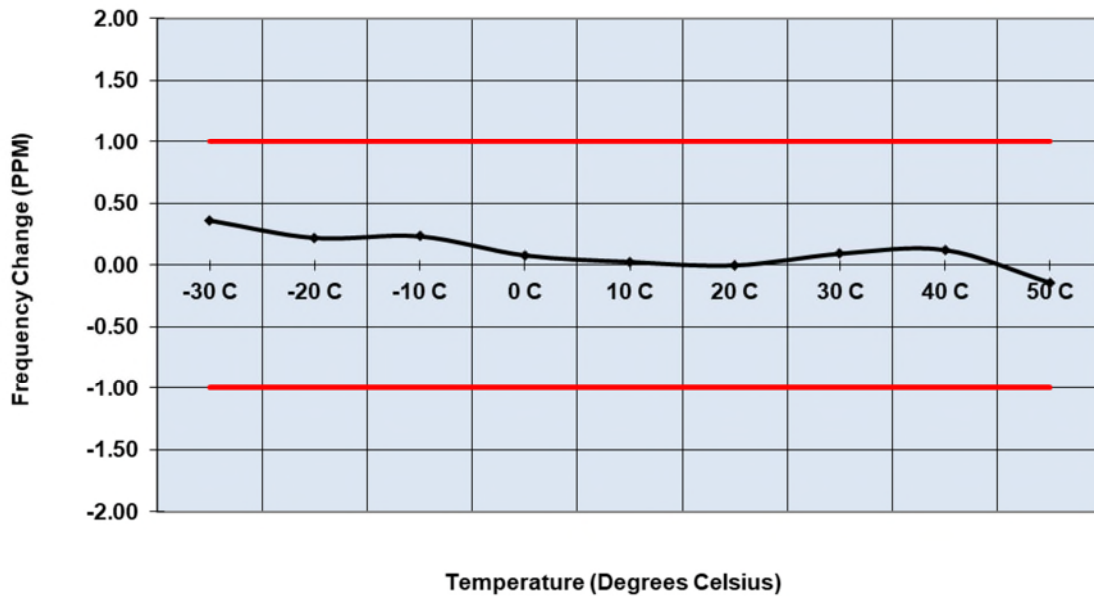


Figure 2.6.6-4: Frequency Stability – 940.0125 MHz – Low Power



FCC 47 CFR Part 101.107; ISED Canada RSS-119 5.3

Frequency Stability

Frequency (MHz): 941.487470
Deviation Limit (PPM): 1
Nominal Voltage (VDC): 24

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	941.487830	0.382	100%	24.00
-20 C	941.487690	0.233	100%	24.00
-10 C	941.487696	0.240	100%	24.00
0 C	941.487572	0.108	100%	24.00
10 C	941.487401	-0.073	100%	24.00
20 C	941.487470	0.000	100%	24.00
30 C	941.487548	0.083	100%	24.00
40 C	941.487480	0.011	100%	24.00
50 C	941.487354	-0.123	100%	24.00
20 C	941.487450	-0.021	85%	20.40
20 C	941.487455	-0.016	115%	27.60

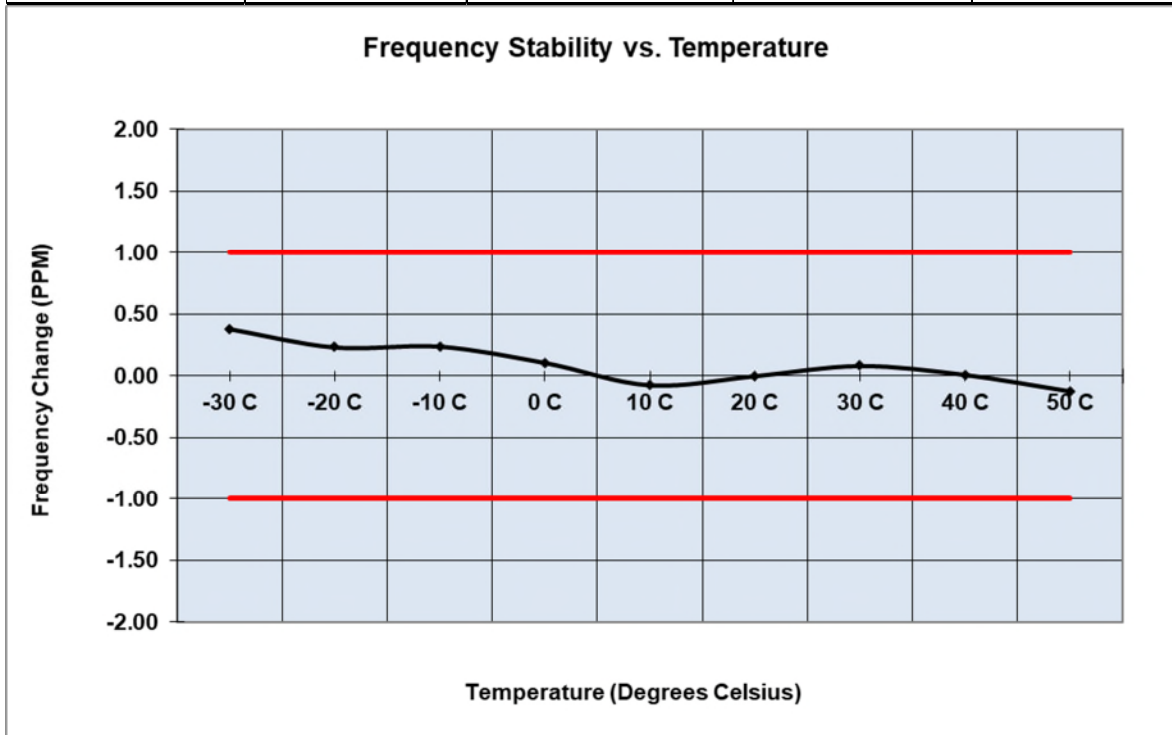


Figure 2.6.6-5: Frequency Stability – 941.4875 MHz – High Power



Frequency Stability

Frequency (MHz): 952.499956
 Deviation Limit (PPM): 1
 Nominal Voltage (VDC): 24

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	952.500358	0.422	100%	24.00
-20 C	952.500206	0.262	100%	24.00
-10 C	952.500182	0.237	100%	24.00
0 C	952.500084	0.134	100%	24.00
10 C	952.499978	0.023	100%	24.00
20 C	952.499956	0.000	100%	24.00
30 C	952.500076	0.126	100%	24.00
40 C	952.500030	0.078	100%	24.00
50 C	952.499856	-0.105	100%	24.00
20 C	952.499952	-0.004	85%	20.40
20 C	952.499960	0.004	115%	27.60

Frequency Stability vs. Temperature

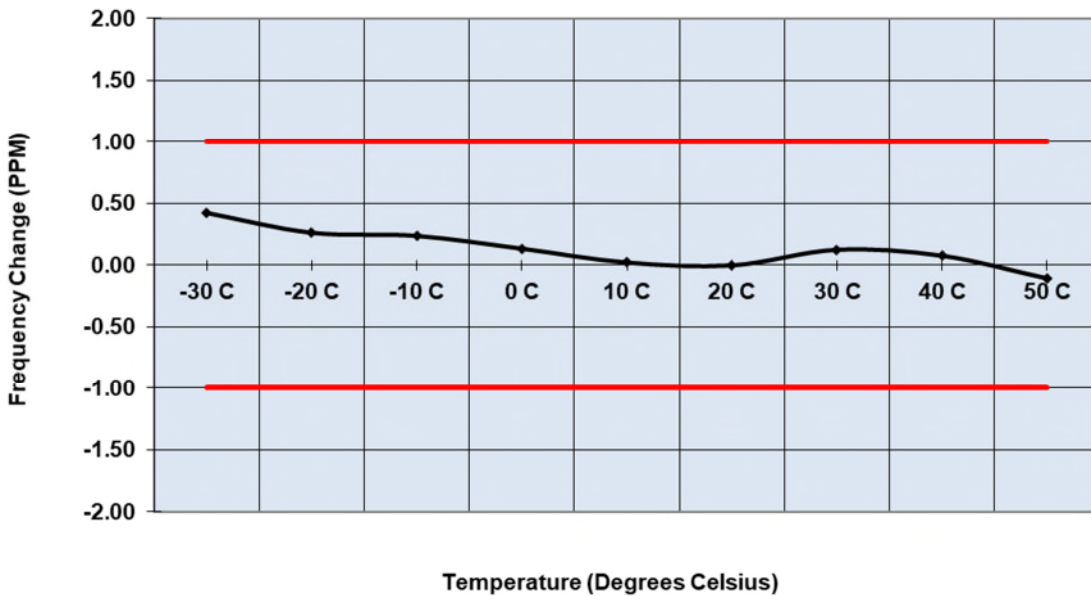


Figure 2.6.6-6: Frequency Stability – 952.5 MHz – High Power



Frequency Stability

Frequency (MHz): 959.924954
Deviation Limit (PPM): 1
Nominal Voltage (VDC): 24

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	959.925344	0.406	100%	24.00
-20 C	959.925194	0.250	100%	24.00
-10 C	959.925182	0.237	100%	24.00
0 C	959.925070	0.121	100%	24.00
10 C	959.924982	0.029	100%	24.00
20 C	959.924954	0.000	100%	24.00
30 C	959.925076	0.127	100%	24.00
40 C	959.925034	0.083	100%	24.00
50 C	959.924868	-0.090	100%	24.00
20 C	959.924952	-0.002	85%	20.40
20 C	959.924820	-0.139	115%	27.60

Frequency Stability vs. Temperature

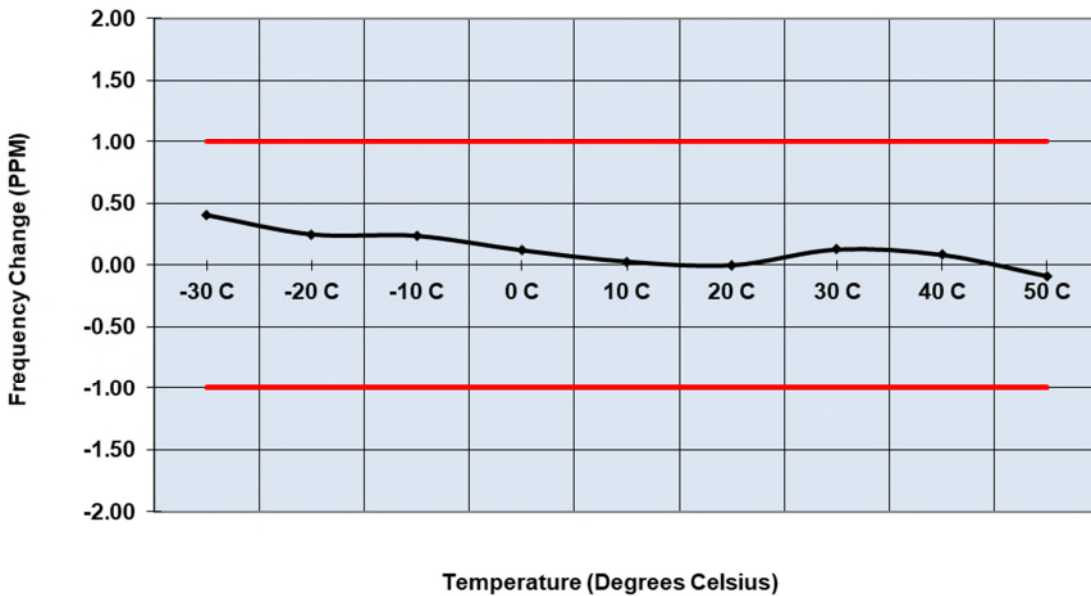


Figure 2.6.6-7: Frequency Stability – 959.925 MHz – High Power



Frequency Stability

Frequency (MHz): 941.487480
 Deviation Limit (PPM): 1
 Nominal Voltage (VDC): 24

Temperature	Frequency	Frequency Error	Voltage	Voltage
C	MHz	(PPM)	(%)	(VDC)
-30 C	941.487846	0.388	100%	24.00
-20 C	941.487700	0.233	100%	24.00
-10 C	941.487682	0.214	100%	24.00
0 C	941.487570	0.095	100%	24.00
10 C	941.487484	0.004	100%	24.00
20 C	941.487480	0.000	100%	24.00
30 C	941.487548	0.072	100%	24.00
40 C	941.487516	0.038	100%	24.00
50 C	941.487346	-0.142	100%	24.00
20 C	941.487450	-0.032	85%	20.40
20 C	941.487484	0.004	115%	27.60

Frequency Stability vs. Temperature

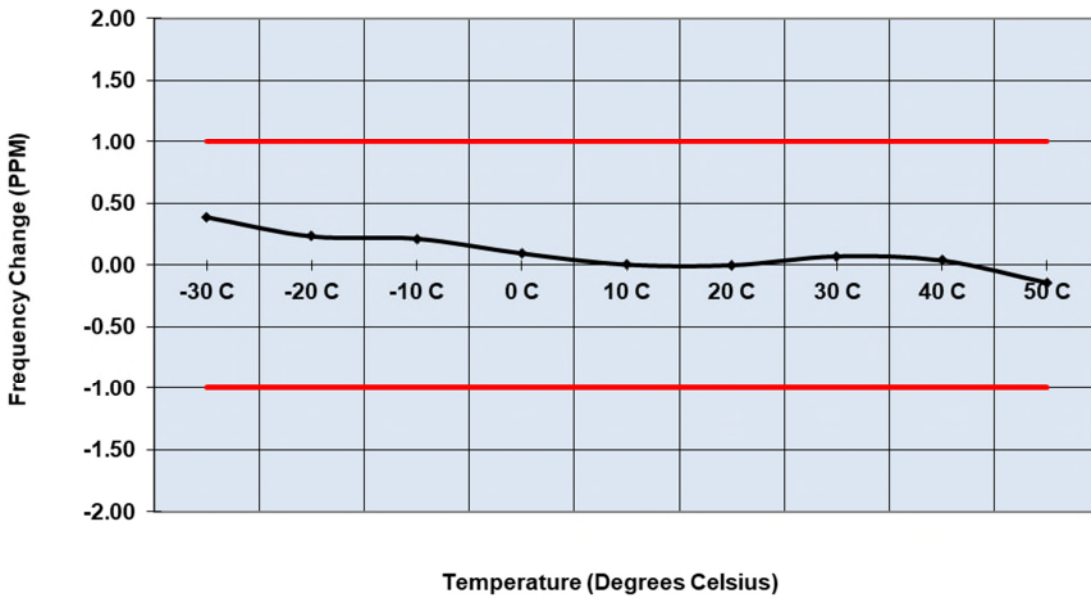


Figure 2.6.6-8: Frequency Stability – 941.4875 MHz – Low Power



Frequency Stability

Frequency (MHz): 952.499984
Deviation Limit (PPM): 1
Nominal Voltage (VDC): 24

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	952.500337	0.370	100%	24.00
-20 C	952.500194	0.220	100%	24.00
-10 C	952.500172	0.197	100%	24.00
0 C	952.500082	0.103	100%	24.00
10 C	952.499976	-0.008	100%	24.00
20 C	952.499984	0.000	100%	24.00
30 C	952.500078	0.099	100%	24.00
40 C	952.500030	0.048	100%	24.00
50 C	952.499860	-0.130	100%	24.00
20 C	952.499950	-0.036	85%	20.40
20 C	952.499952	-0.034	115%	27.60

Frequency Stability vs. Temperature

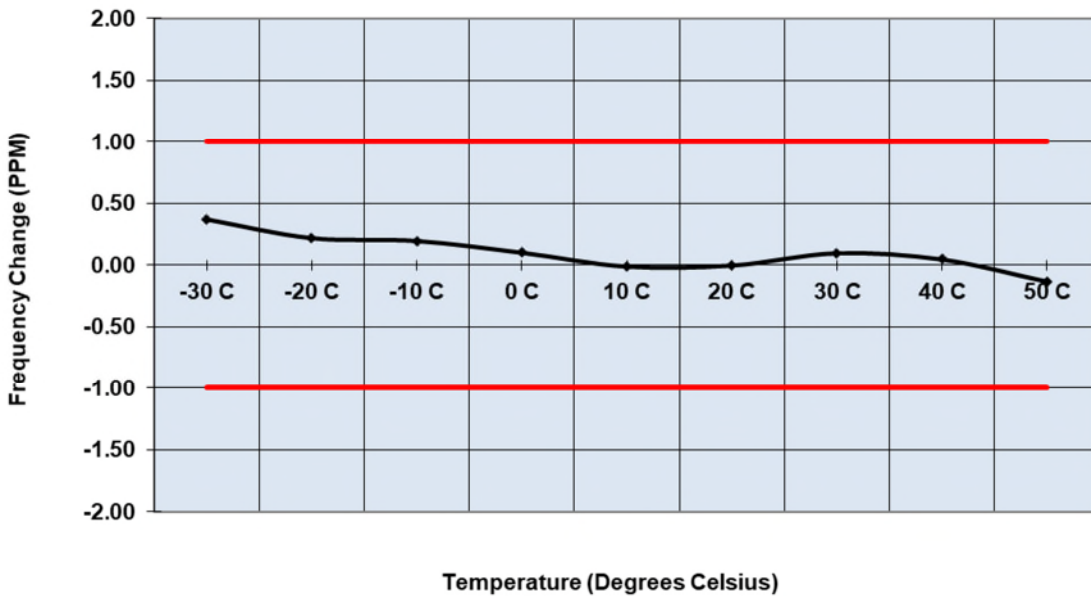


Figure 2.6.6-9: Frequency Stability – 952.5 MHz – Low Power



Frequency Stability

Frequency (MHz): 959.924954
Deviation Limit (PPM): 1
Nominal Voltage (VDC): 24

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	959.925290	0.350	100%	24.00
-20 C	959.925190	0.246	100%	24.00
-10 C	959.925162	0.216	100%	24.00
0 C	959.925066	0.117	100%	24.00
10 C	959.924970	0.017	100%	24.00
20 C	959.924954	0.000	100%	24.00
30 C	959.925064	0.114	100%	24.00
40 C	959.925032	0.081	100%	24.00
50 C	959.924868	-0.090	100%	24.00
20 C	959.924952	-0.002	85%	20.40
20 C	959.924982	0.029	115%	27.60

Frequency Stability vs. Temperature

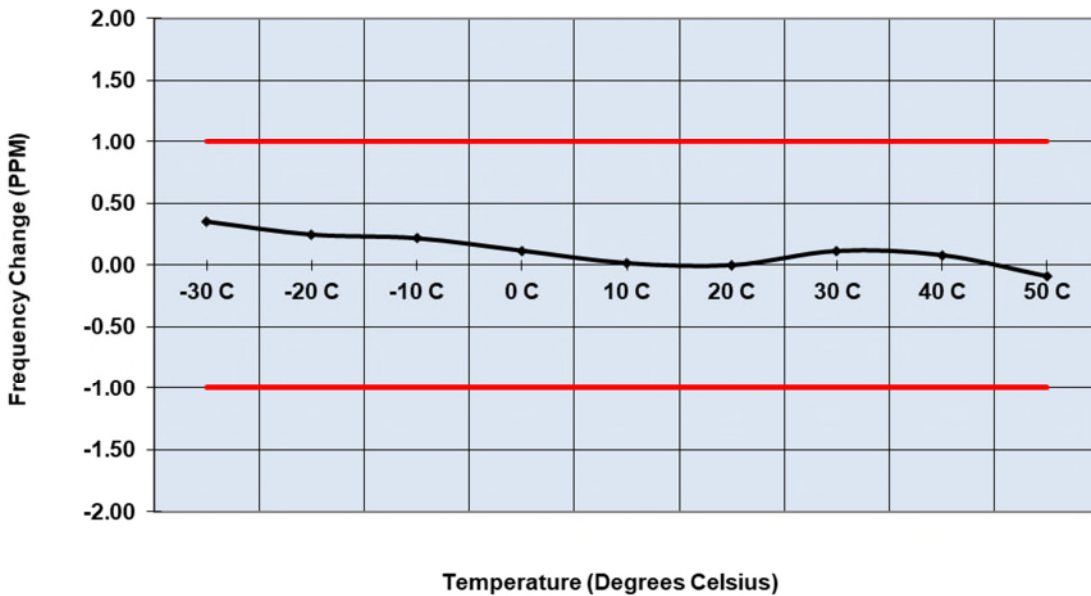


Figure 2.6.6-10: Frequency Stability – 959.925 MHz – Low Power



2.6.7 Test Location and Test Equipment Used

This test was carried out in TÜV SÜD America, Inc., 5610 W. Sligh Ave, Suite 100, Tampa, FL 33634, USA.

Instrument	Manufacturer	Type No	TE No	Software / Firmware Revision	Calibration Period (months)	Calibration Due
Digital Thermometer	Omega Engineering	MDSS41-TC	BEMC00002	N/A	24	21-Sep-2023
Digital MultiMeter	Fluke	115	BEMC02108	N/A	24	29-Mar-2023
High Frequency Cable 26 GHz	Hasco, Inc.	HLL142-S1-S1-192/WA	DEMC3032	N/A	12	15-Jul-2023
Atten 20dB N-M/F, DC-18GHz, 10W	Aeroflex Inmet	18N10W-20	DEMC3045	N/A	12	15-Jul-2023
Signal & Spectrum Analyzer	Rohde & Schwarz	FSW43	DEMC3085	2.90 SP1	12	07-Jun-2023
DC Power Supply	Xantrex	XHR60-18	TEMC00001	N/A	N/A	NCR
Temperature Test Chamber	Sun Electronic Systems, Inc.	EC127	TEMC00242	5.10	N/A	NCR

TU - Traceability Unscheduled
 O/P MON - Traceability Unscheduled
 N/A - Not Applicable
 NCR - No Calibration Required



3 Test Equipment Information

3.1 General Test Equipment Used

Instrument	Manufacturer	Type No	TE No	Software / Firmware Revision	Calibration Period (months)	Calibration Due
50ohms M/F 4GHz, 100W Attenuator	Fairview Microwave Inc.	SA4N100-20	615	N/A	12	25-Mar-2023
Digital Thermometer	Omega Engineering	MDSS41-TC	BEMC00002	N/A	24	21-Sep-2023
100Hz-26.5GHz EMC analyzer/HYZ	Agilent	E7405A	BEMC00523	A.14.06	12	01-Feb-2023
Linear Polarized Horn antenna, 1-18 GHz	EMCO	3115	BEMC02006	N/A	24	10-Feb-2024
Tile Automation Software	ETS Lindgren	TILE4! - Version 4.2.A	BEMC02095	4.2A	N/A	NCR
Digital MultiMeter	Fluke	115	BEMC02108	N/A	24	29-Mar-2023
Duratest High Frequency Cable 26.5GHz	Teledyne Storm Products	921-0101-036	BEMC02112	N/A	12	20-Oct-2022
Synthesized Signal Generator 0.05 - 26 GHz	Hewlett Packard	8673D	BEMC02126	N/A	24	07-Jun-2024
PE-P160 40 GHz Cable	Pasternack	PE360-396	BEMC02147	N/A	12	23-Jun-2023
High Frequency Cable 26 GHz	Hasco, Inc.	HLL142-S1-S1-192/WA	DEMC3032	N/A	12	15-Jul-2023
Atten 30dB N-M/F, DC, 18 GHz, 10W	Aeroflex Inmet	18N10W-30	DEMC3041	N/A	12	15-Jul-2023
Atten 20dB N-M/F, DC-18GHz, 10W	Aeroflex Inmet	18N10W-20	DEMC3045	N/A	12	15-Jul-2023
Signal & Spectrum Analyzer	Rohde & Schwarz	FSW43	DEMC3085	2.90 SP1	12	07-Jun-2023
DC Power Supply	Xantrex	XHR60-18	TEMC00001	N/A	N/A	NCR
BI LOG PERIODIC, ANTENNA	Schaffner	CBL6112B	TEMC00005	N/A	24	01-Nov-2023
EMC Chamber	Panashield	N/A	TEMC00031	N/A	36	28-Jan-2024
Double Ridge Guide Horn	ETS Lindgren	3117	TEMC00061	N/A	24	11-Feb-2024
Microwave Preamplifier	Com-Power Corporation	PAM-118A	TEMC00160	N/A	12	26-Mar-2023
A81-0303 18 GHz Cable Set	Teledyne Storm Products	A81-0303-360/96	TEMC00201	N/A	12	26-Mar-2023
Temperature Test Chamber	Sun Electronic Systems, Inc.	EC127	TEMC00242	5.10	N/A	NCR



TU - Traceability Unscheduled
O/P MON - Traceability Unscheduled
N/A - Not Applicable
NCR - No Calibration Required

4 Diagram of Test Set-ups

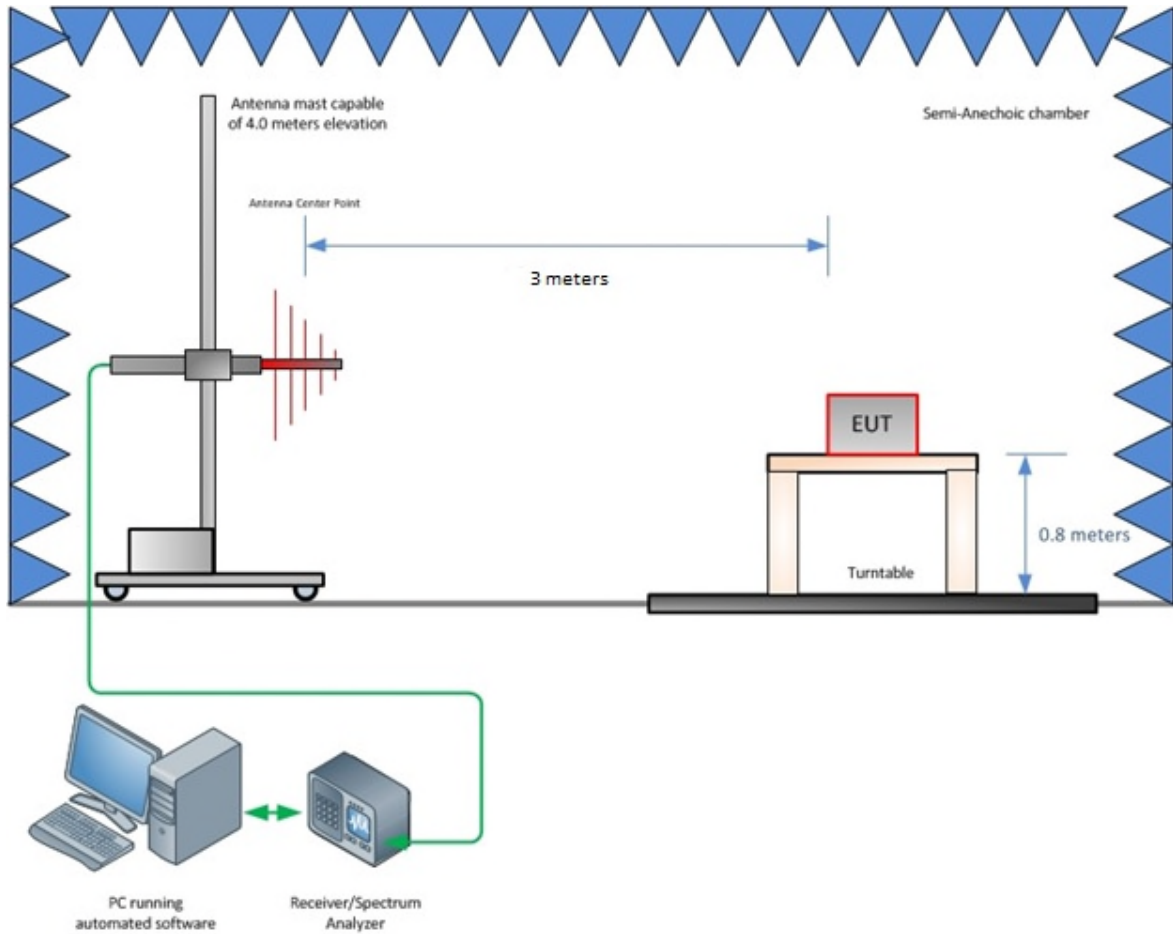


Figure 4-1 - Radiated Emissions Test Setup up to 1 GHz

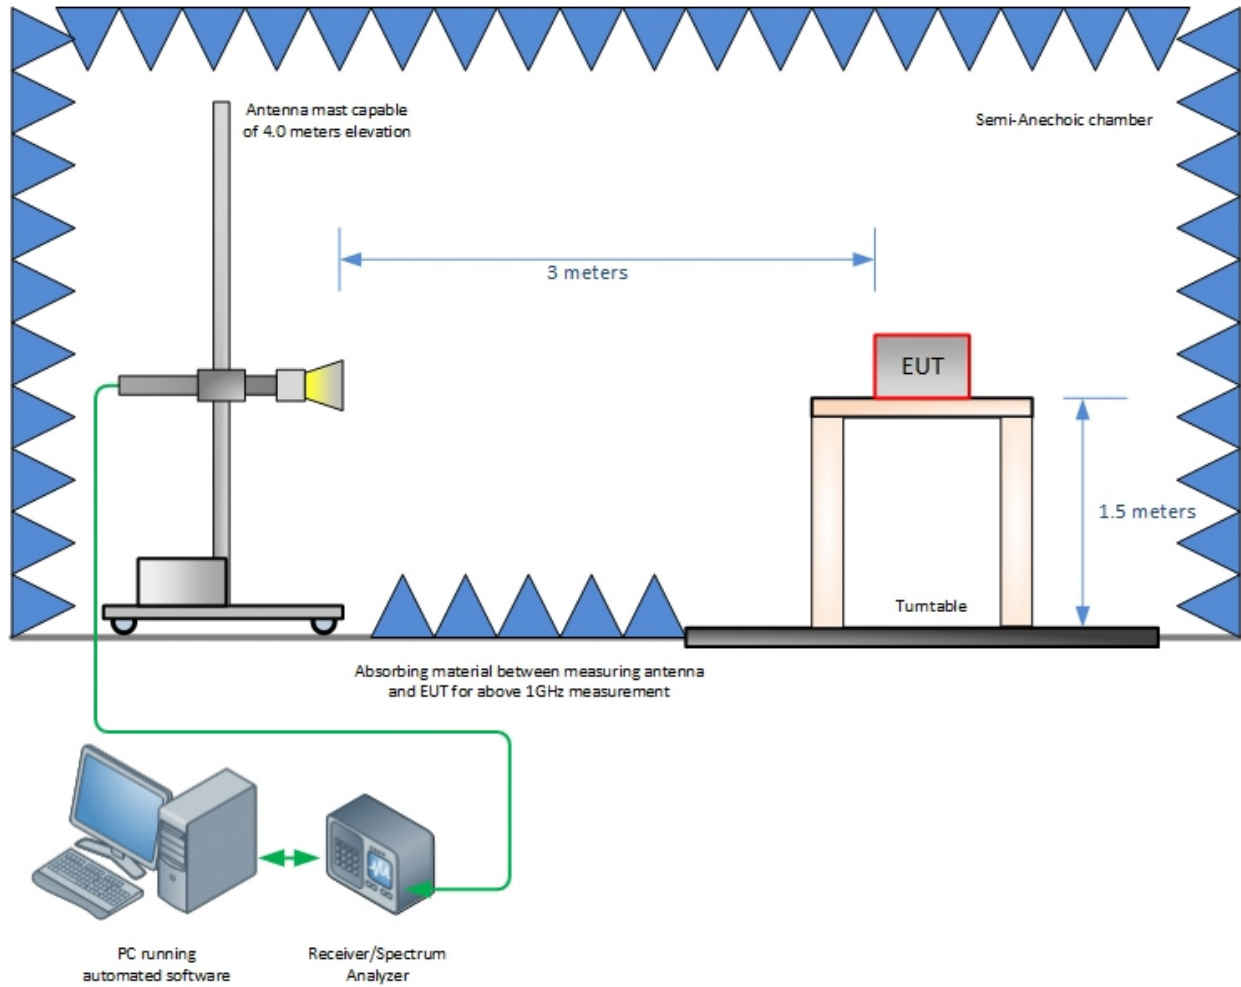


Figure 4-2 - Radiated Emissions Test Setup above 1 GHz

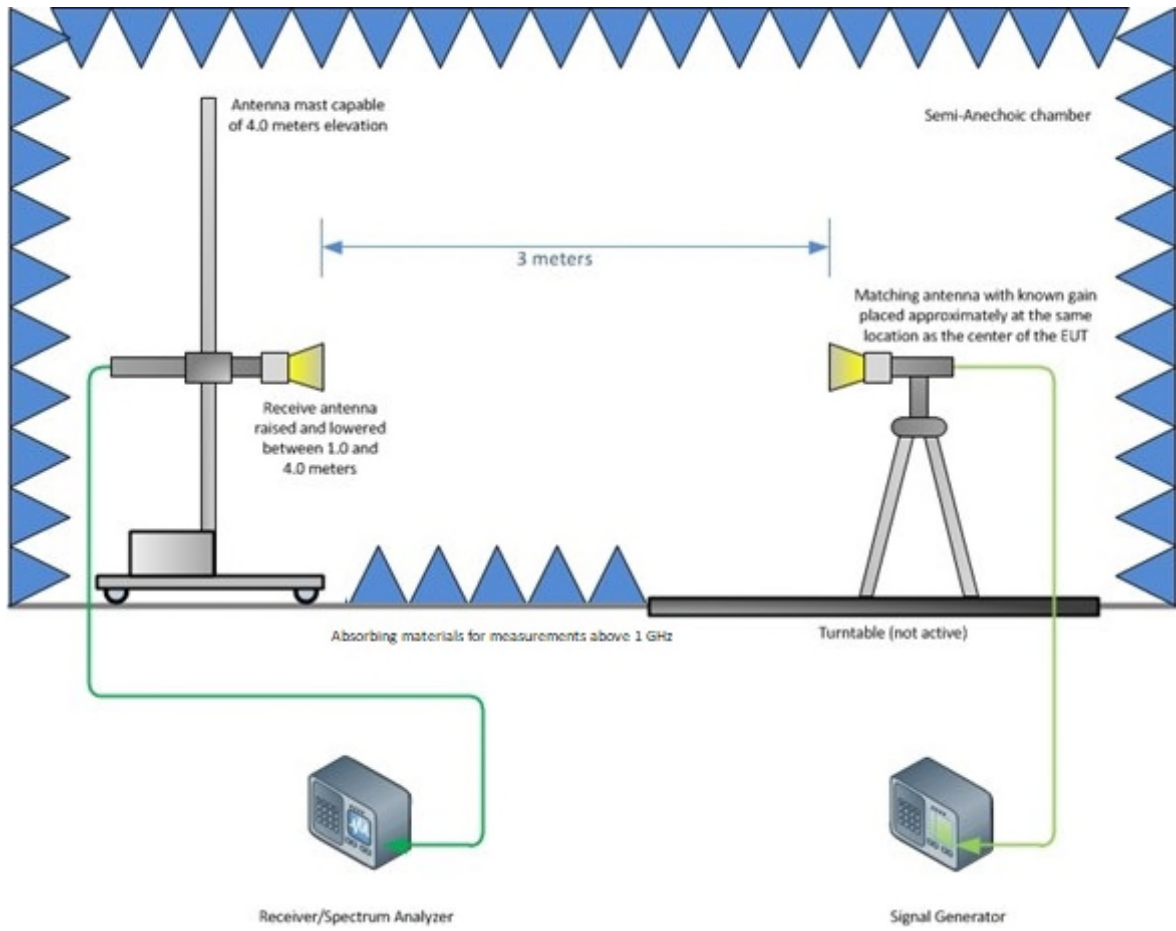


Figure 4-3 - Substitution Test Setup above 1 GHz

5 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Table 5-1 - Values of U_{CISPR} and U_{Lab}

Measurement	U_{CISPR}	U_{Lab}
Conducted disturbance (mains port) (9 kHz – 150 kHz) (150 kHz – 30 MHz)	3.8 dB 3.4 dB	3.71 dB 3.31 dB
Conducted disturbance (telecom port) (150 kHz – 30 MHz 55 dB LCL) (150 kHz – 30 MHz 65 dB LCL) (150 kHz – 30 MHz 75 dB LCL)	5.0 dB 5.0 dB 5.0 dB	4.11 dB 4.50 dB 4.94 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1 000 MHz) (1 – 6 GHz) (6-18 GHz)	6.3 dB 5.2 dB 5.5 dB	5.85 dB 4.48 dB 4.48 dB

Notes:

U_{CISPR} resembles a value of measurement uncertainty for a specific test, which was determined by considering uncertainties associated with the quantities listed in CISPR 16-4-2:2011.



6 Accreditation, Disclaimers and Copyright

TÜV SÜD America Inc.'s reports apply only to the specific sample tested under stated test conditions. It is the manufacturer's responsibility to assure the continued compliance of production units of this model. TÜV SÜD America, Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD America, Inc.'s issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and TÜV SÜD America, Inc., extracts from the test report shall not be reproduced, except in full without TÜV SÜD America, Inc.'s written approval.

This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the federal government.