

Certification Test Report

FCC ID: SDBSGW100
IC: 2220A-SGW100
FCC Rule Part: CFR 47 Part 24 Subpart D, Part 101, Subpart C
IC Radio Standards Specification: RSS 119, RSS 134

ACS Report Number: 15-3018.W06.1A

Applicant: Sensus Metering Systems, Inc.
Model: SGW100

Test Begin Date: May 28, 2015
Test End Date: February 9, 2016

Report Issue Date: February 10, 2016



For The Scope of Accreditation Under Certificate Number AT-1921

This report must not be used by the client to claim product certification, approval, or endorsement by ANAB, ANSI, or any agency of the Federal Government.

Project Manager:



Mario de Aranzeta
Lab Manager Durham (RTP)
Advanced Compliance Solutions, Inc.

Reviewed by:



Kirby Munroe
Director, Wireless Certifications
Advanced Compliance Solutions, Inc.

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains 79 pages

Table of Contents

1.0 GENERAL	3
1.1 PURPOSE.....	3
1.2 PRODUCT DESCRIPTION.....	3
1.3 TEST METHODOLOGY.....	3
1.4 EMISSION DESIGNATORS.....	5
2.0 TEST FACILITIES	6
2.1 LOCATION	6
2.2 LABORATORY ACCREDITATIONS/RECOGNITIONS/CERTIFICATIONS.....	6
2.3 RADIATED & CONDUCTED EMISSIONS TEST SITE DESCRIPTION	7
3.0 APPLICABLE STANDARD REFERENCES	9
4.0 LIST OF TEST EQUIPMENT	10
5.0 SUPPORT EQUIPMENT	11
6.0 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM	11
7.0 SUMMARY OF TESTS	12
7.1 RF POWER OUTPUT	12
7.2 OCCUPIED BANDWIDTH	13
7.3 SPURIOUS EMISSIONS AT ANTENNA TERMINALS	41
7.4 FIELD STRENGTH OF SPURIOUS EMISSIONS	66
8.0 CONCLUSION	79

1.0 GENERAL

1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 2 Subpart J, Part 24 Subpart D and Part 101 Subpart C of the FCC's Code of Federal Regulations, and Industry Canada Radio Standards Specifications RSS-119 and RSS-134.

1.2 Product Description

The SGW is a battery operated data acquisition and control device, "Water and Gas Smart Gateway", for use on FlexNet systems. Multiple sensors are available to interface with the product including: pressure, level, flow, temperature, weather, power, closure.

Manufacturer Information:
Sensus Metering Systems, Inc.
639 Davis Drive
Morrisville, NC 27560

Test Sample Serial Numbers: RF conducted measurements
KDS sample: 120000195
ILSI sample: 120000376
Taitien sample: 120000259

Test Sample Serial Numbers: RF radiated measurements
KDS sample: 120000133
ILSI sample: 120000333
Taitien sample: 120000251

Test Sample Condition: The EUT was in good functional condition with no physical damages.

1.3 Test Methodology

1.3.1 Configurations and Justification

The EUT was evaluated for radiated and RF conducted measurements for all modulation formats. Where applicable, data is provided for the unit having the worst case emissions. Three different suppliers of TCXOs' were evaluated (Taitien, KDS, and ILSI).

Modulation characteristics were evaluated on one EUT sample as the units are identical except the TCXO. The sample used for all RF conducted measurements was the sample with the KDS TCXO as it was found to have the highest output power and highest RF conducted spurious emissions.

At the clients request RF conducted emissions data and frequency stability data is submitted for all three TCXO variants.

The EUT was evaluated in its normal operating orientation (enclosure upright).

The evaluation for unintentional emission is documented separately in a verification report.

1.3.2 In-Band Testing Methodology

The EUT is designed to operate in multiple bands under the requirements of CFR 47 Parts 24 and 101. The following is a list of the frequency bands of operation sorted based on the FCC rule parts in which the band is associated.

CFR Title 47 Rule Part	Frequency Band of Operation (MHz)
24D	901.0 - 902.0
24D	930.0 - 931.0
24D	940.0 - 941.0
101	928.85 - 929.0
101	932.0 - 932.5
101	941.0 - 941.5
101	952.0 – 953.0
101	959.85 - 960.0

Based on the requirements set forth in accordance 47 CFR 2.1046-2.1057 as stated above, the methodology in selecting the places to test in the available bands of operation is outlined in the following table.

CFR Title 47 Rule Part	Frequency Band of Operation (MHz)	Location in the Range of Operation	Approx. Test Freq. MHz
24D	901.0 - 902.0	Middle	901.5000
101	928.85 - 929.0	Middle	928.9250
24D	930.0 - 931.0	Middle	930.5000
101	932.0 - 932.5	Middle	932.2500
24D	940.0 - 941.0	1 near top and 1 near bottom	940.0125
101	941.0 - 941.5		941.4875
101	952.0 – 953.0	Middle	952.5000
101	959.85 – 960.0	Middle	959.9250

1.4 Emission Designators

The SGW100 transmitter produces six distinct modulation formats. The emission designators for the modulation types used by the SGW100 transmitter were calculated using the baud rate defined in the Theory of Operation are as follows.

EMISSIONS DESIGNATORS:

Mode	Emission Designator	Modulation Type
Normal	9K60F2D	7-FSK
Double Density	9K60F2D	13-FSK
C&I (Half-Baud)	4K80F2D	7-FSK
Boost	1K10F2D	7-FSK
MPass (5 kbps)	5K90F1D	2-GFSK
MPass (10 kbps)	11K8F1D	2-GFSK

2.0 TEST FACILITIES

2.1 Location

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions, Inc.
2320 Presidential Dr. Suite 101
Durham NC 27703-8077
Phone: (919) 381-4235
www.acstestlab.com

FCC Test Firm Registration #: 637011
Industry Canada Lab Code: 20446

2.2 Laboratory Accreditations/Recognitions/Certifications

ACS (Durham) is accredited to ISO/IEC 17025 by ANSI-ASQ National Accreditation Board/ANAB accreditation program, and has been issued certificate number AT-1921 in recognition of this accreditation. Unless otherwise specified, all tests methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

2.3 Radiated & Conducted Emissions Test Site Description

2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of an 18' x 28' x 18' shielded enclosure. The chamber is lined with Samwha Electronics Co. LTD Ferrite Absorber, model number SFA300 (HSN-1). The ferrite tile is 10cm x 10 cm and weighs approximately 1.4lbs. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber. On top of the ferrite tiles is DMAS HT-45 (Dutch Microwave Absorber Solutions) hybrid absorber on all walls except the wall behind the antenna mast which has a shorter DMAS HT-25 absorber.

The turntable is 1.50m in diameter and is located 150cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using short #6 copper wire. The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the turntable. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane.

Behind the turntable is a 2' x 6' x 1.5' deep shielded pit used for support equipment if necessary. The pit is equipped with 2 - 4" PVC chase from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

To comply with the requirements of the test methods given on page 4, RF absorbing foam was placed inside the chamber in a configuration that provided the best results. First, a 12ft X 12ft. patch of 10" tall absorber was placed on the floor between the turntable and the receiving antenna. This absorber meets the absorption requirements specified in ANSI C63.4:2014.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3.1-1 below:

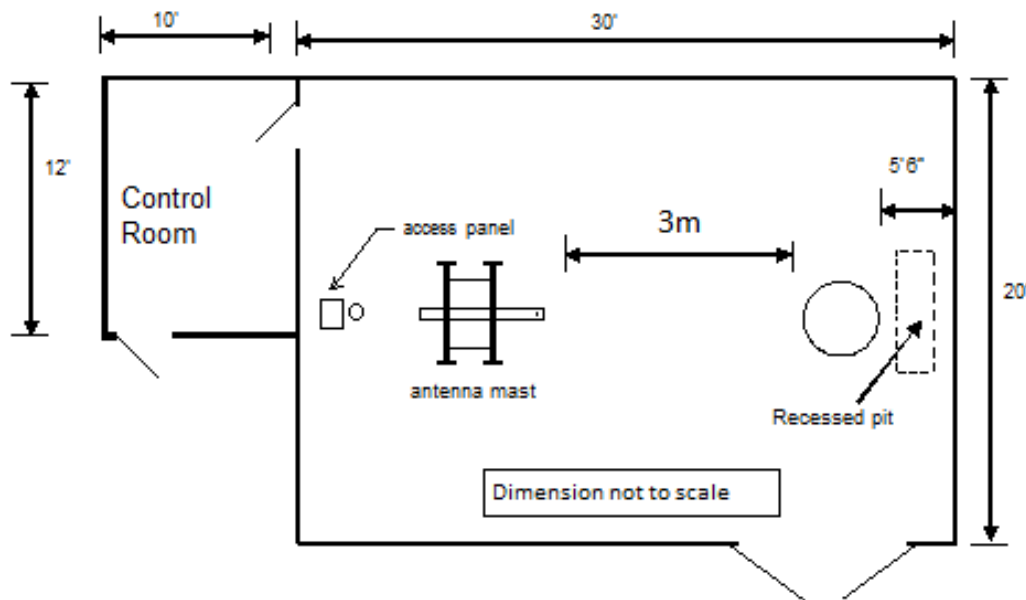


Figure 2.3.1-1: Semi-Anechoic Chamber Test Site

2.3.2 Conducted Emissions Test Site Description

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 10' sheet galvanized steel horizontal ground reference plane (GRP) bonded every 6" to an 8' X 8' aluminum vertical ground plane.

A diagram of the room is shown below in figure 2.3.2-1:

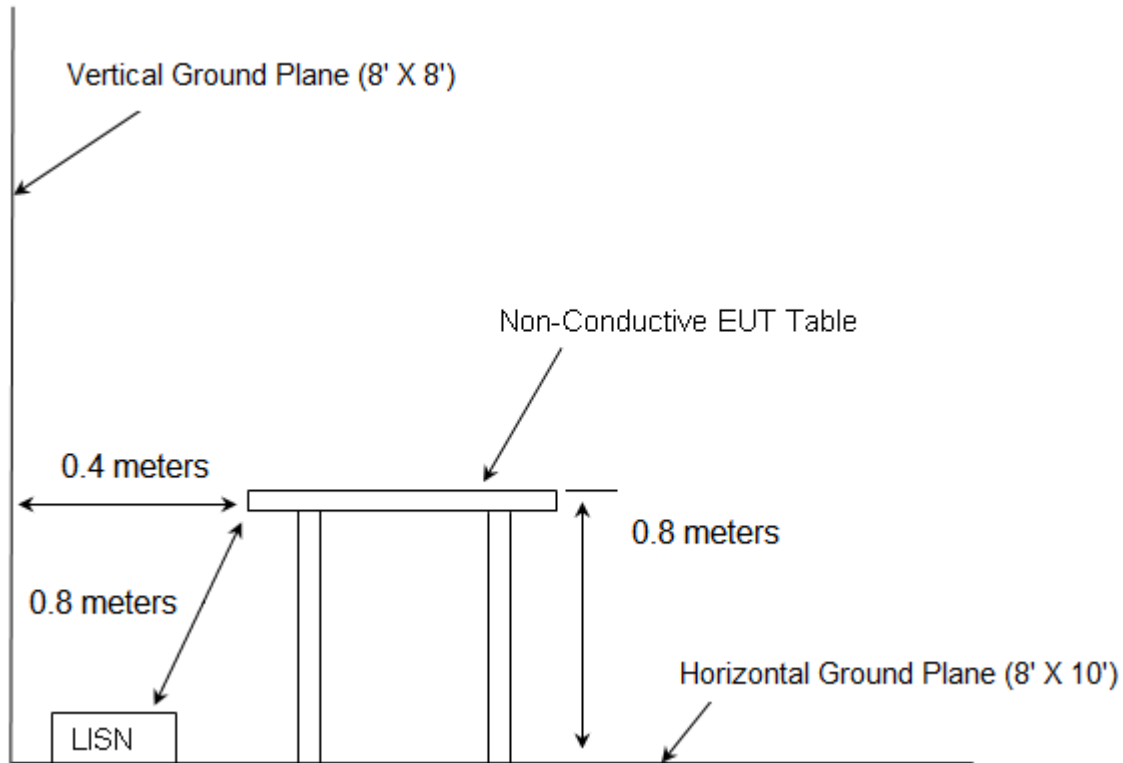


Figure 2.3.2-1: AC Mains Conducted EMI Site

3.0 APPLICABLE STANDARD REFERENCES

The following standards were used:

- 1 - ANSI C63.4-2014: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9 kHz to 40GHz - 2014
- 2 - US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures - 2015
- 3 - US Code of Federal Regulations (CFR): Title 47, Part 24, Subpart D: Personal Communications Services – 2015
- 4 - US Code of Federal Regulations (CFR): Title 47, Part 101, Subpart C: Fixed Microwave Services - 2015
- 5 – TIA-603-D: Land Mobile FM or PM - Communications Equipment - Measurement and Performance Standards – 2010
- 6 – Industry Canada Radio Standards Specification: RSS-119 - Radio Transmitters and Receivers Operating in the Land Mobile and Fixed Services in the Frequency Range 27.41-960 MHz, Issue 12, May 2015
- 7 – Industry Canada Radio Standards Specification: RSS-134 - 900 MHz Narrow Band Personal Communication Service, Issue 1, March 2000
- 8 – Industry Canada Radio Standards Specification: RSS-GEN – General Requirements for Compliance of Radio Apparatus, Issue 4, November 2014.

4.0 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

Table 4-1: Test Equipment

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
3002	Rohde & Schwarz	ESU40	Receiver	100346	7/25/2014	7/25/2015
3002	Rohde & Schwarz	ESU40	Receiver	100346	7/6/2015	7/6/2016
3038	Florida RF Labs	NMSE-290AW-60.0-NMSE	Cable Set	1448	1/12/2015	1/12/2016
3038	Florida RF Labs	NMSE-290AW-60.0-NMSE	Cable Set	1448	12/22/2015	12/22/2016
3039	Florida RF Labs	NMSE-290AW-396.0-NMSE	Cable Set	1447	1/12/2015	1/12/2016
3039	Florida RF Labs	NMSE-290AW-396.0-NMSE	Cable Set	1447	12/22/2015	12/22/2016
3016	Fei Teng Wireless Technology	HA-07M18G-NF	Antennas	2013120203	1/14/2015	1/14/2016
3016	Fei Teng Wireless Technology	HA-07M18G-NF	Antennas	2013120203	1/26/2016	1/26/2017
626	EMCO	3110B	Antennas	9411-1945	2/26/2014	2/26/2016
277	Emco	93146	Antennas	9904-5199	9/2/2014	9/2/2016
3006	Rohde & Schwarz	TS-PR18	Amplifiers	122006	7/24/2014	7/24/2015
3006	Rohde & Schwarz	TS-PR18	Amplifiers	122006	6/29/2015	6/29/2016
3054	Mountain View Cable	BMS-RG400-36.0-BMS	Cables	3054	1/12/2015	1/12/2016
3054	Mountain View Cable	BMS-RG400-36.0-BMS	Cables	3054	12/30/2015	12/30/2016
3020	Rohde & Schwarz	SMB100A	Signal Generators	175943	7/24/2014	7/24/2015
3020	Rohde & Schwarz	SMB100A	Signal Generators	175943	7/14/2015	7/14/2016
3008	Rohde & Schwarz	NRP2	Meter	103131	1/15/2015	1/15/2016
3008	Rohde & Schwarz	NRP2	Meter	103131	1/28/2016	1/28/2017
3009	Rohde & Schwarz	NRP-Z81	Meter	102397	1/15/2015	1/15/2016
3009	Rohde & Schwarz	NRP-Z81	Meter	102397	1/28/2016	1/28/2017
3046	Aeroflex Inmet	26AH-10	Attenuator	1443	1/15/2015	1/15/2016
3046	Aeroflex Inmet	26AH-10	Attenuator	1443	1/6/2016	1/6/2017
3033	Hasco, Inc.	HLL142-S1-S1-36	Cables	1435	1/15/2015	1/15/2016
3033	Hasco, Inc.	HLL142-S1-S1-36	Cables	1435	1/7/2016	1/7/2017
3034	Hasco, Inc.	HLL142-S1-S1-12	Cables	3076	1/18/2015	1/18/2016
3034	Hasco, Inc.	HLL142-S1-S1-12	Cables	3076	12/30/2015	12/30/2016
3012	Rohde & Schwarz	EMC32-EB	Software	100731	1/19/2015	7/19/2016
RE164	Thermotron	S-1.2C	Environmental Chamber	22857	1/14/2015	1/14/2016
RE164	Thermotron	S-1.2C	Environmental Chamber	22857	1/13/2016	1/13/2017
3028	Micro-Tronics	HPM50111	Filter	122	1/17/2015	1/17/2016
3028	Micro-Tronics	HPM50111	Filter	122	12/21/2015	12/21/2016
3014	EMCO	3115	Antennas	9901-5653	2/10/2015	2/10/2016
3031	Hasco, Inc.	HLL335-S1-S1-96	Cables	3074	1/14/2015	1/14/2016

NCR = No Calibration Required

Firmware Version: ESU40 is 4.73 SP1

Software Version: EMC32-B is 9.15

Some assets are listed twice to indicate continuance of calibration over the entire testing period.

5.0 SUPPORT EQUIPMENT

Table 5-1: EUT and Support Equipment

Item #	Type Device	Manufacturer	Model/Part #	Serial #
1	EUT	Sensus	SGW100	120000333
2	Power Supply	Sensus 3.6Vdc	N/A	N/A

Table 5-2: Cable Description

Cable #	Cable Type	Length	Shield	Termination
A	EUT	1.8m	No	Power Supply
B	Power Supply	1.8m	No	AC mains

6.0 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

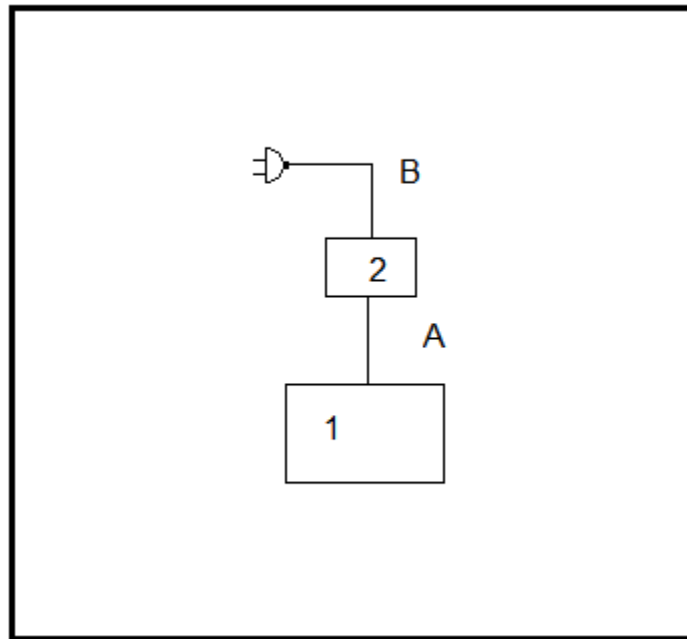


Figure 6-1: EUT Test Setup

7.0 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

7.1 RF Power Output

7.1.1 Measurement Procedure

The RF output of the equipment under test was directly connected to the input of a wide band RF power meter through 30 dB of passive attenuation. The results are shown below.

7.1.2 Measurement Results

Part 24.132, 101.113 (a), and IC RSS-134 6.2(i), (ii) and RSS-119 5.4

Table 7.1.2-1: Peak Output Power

Frequency (MHz)	FCC Rule Part	Output Power (dBm)	Output Power Watts
901.5000	24D	29.51	0.89
930.5000	24D	29.07	0.81
940.0125	24D	29.26	0.84
928.9250	101	29.13	0.82
932.2500	101	29.21	0.83
941.4875	101	29.30	0.85
952.5000	101	29.16	0.82
959.9250	101	29.16	0.82

7.2 Occupied Bandwidth

7.2.1 Measurement Procedure

The RF output of the equipment under test was directly connected to the input of the spectrum analyzer through 40 dB of passive attenuation for the FCC plots and for the IC plots. The spectrum analyzer resolution and video bandwidths were set to 300 Hz and 3000 Hz respectively. The internal correction factors of the spectrum analyzer were employed to correct for any cable or attenuator losses. Results of the test are shown below for all modes of operation.

7.2.2 Measurement Results – Emission Masks

Part 24.133 a(1), a(2), IC RSS-134 6.3(i), (ii) – Emission Limits

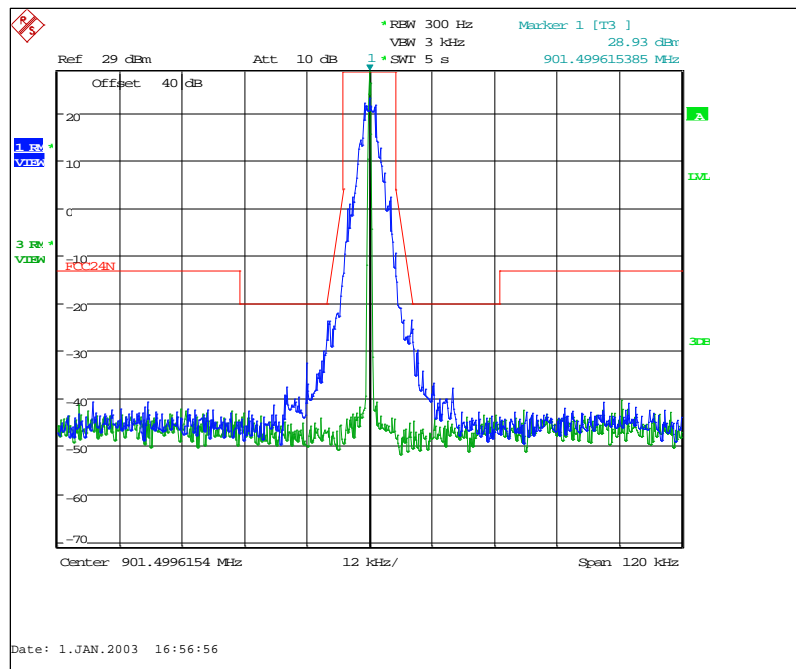


Figure 7.2.2-1: 901.5 MHz – 12.5 kHz Channel Spacing – C&I Mode

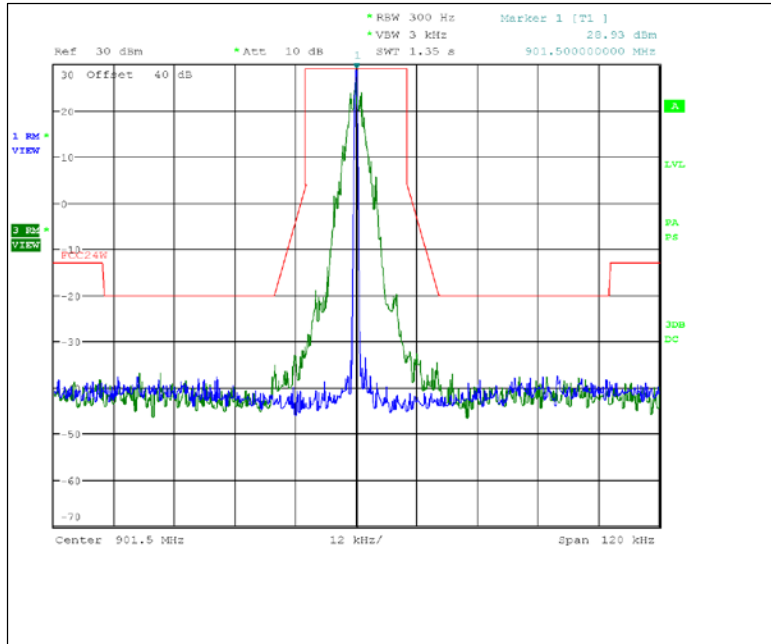


Figure 7.2.2-2: 901.5 MHz – 25 kHz Channel Spacing – C&I Mode

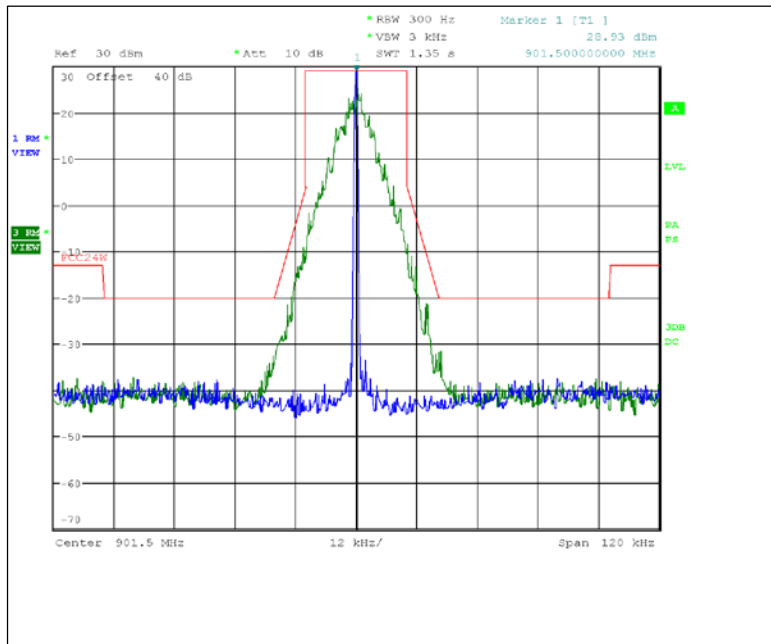


Figure 7.2.2-3: 901.5 MHz – 25 kHz Channel Spacing – Double Density Mode

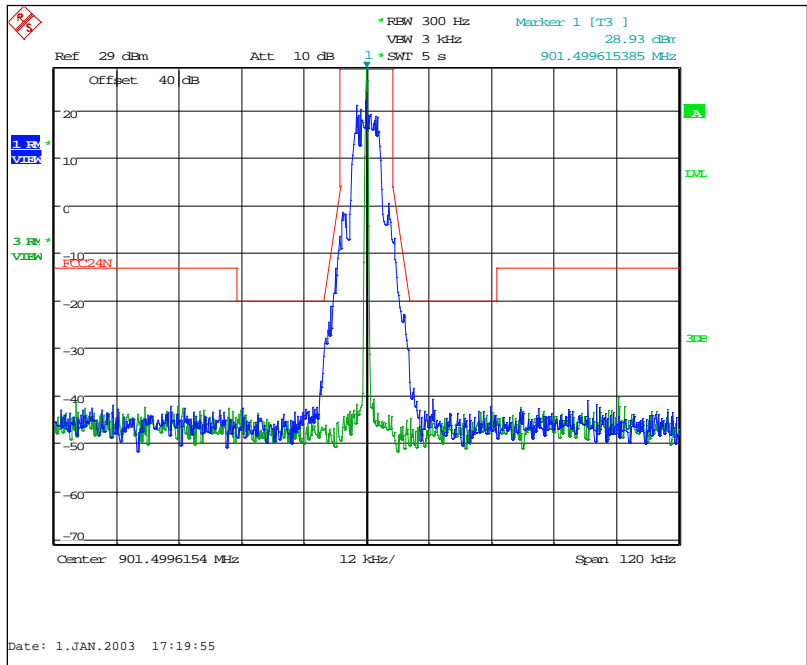


Figure 7.2.2-4: 901.5 MHz – 12.5 kHz Channel Spacing – mPass 5k Mode

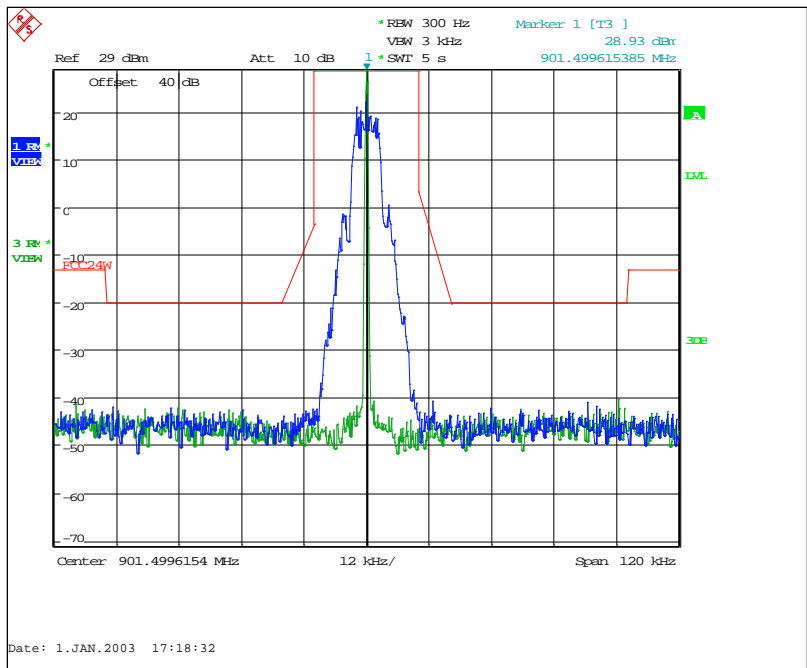


Figure 7.2.2-5: 901.5 MHz – 25 kHz Channel Spacing – mPass 5k Mode

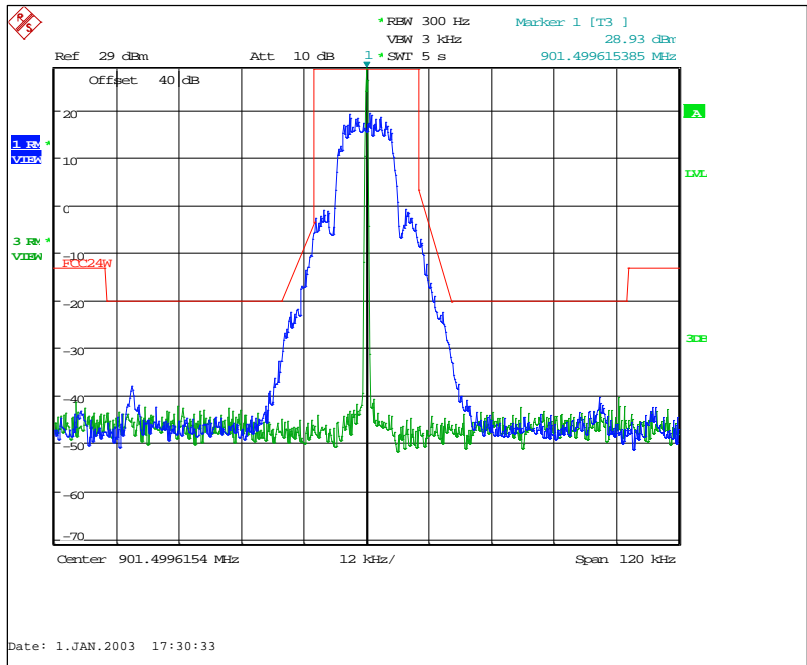


Figure 7.2.2-6: 901.5 MHz – 25 kHz Channel Spacing – mPass 10k Mode

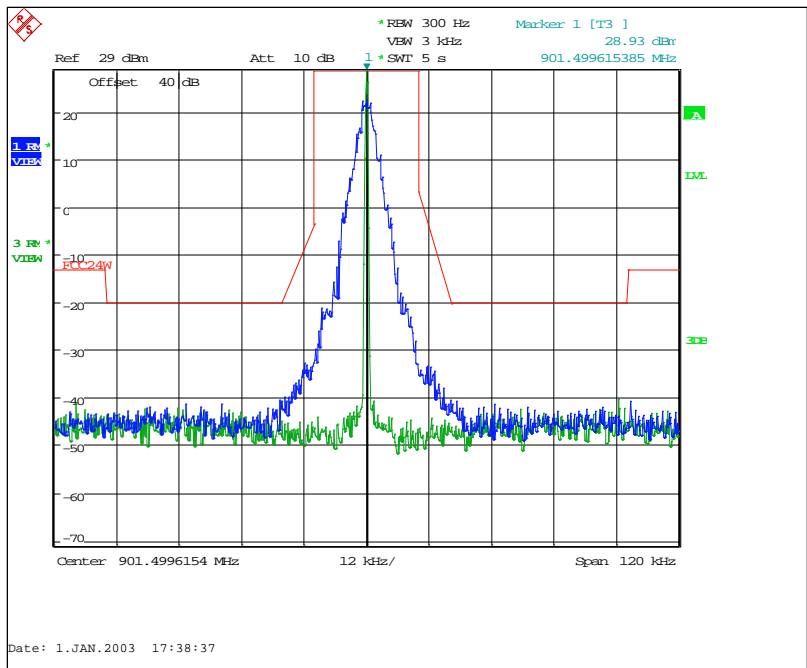


Figure 7.2.2-7: 901.5 MHz – 25 kHz Channel Spacing – Normal Mode

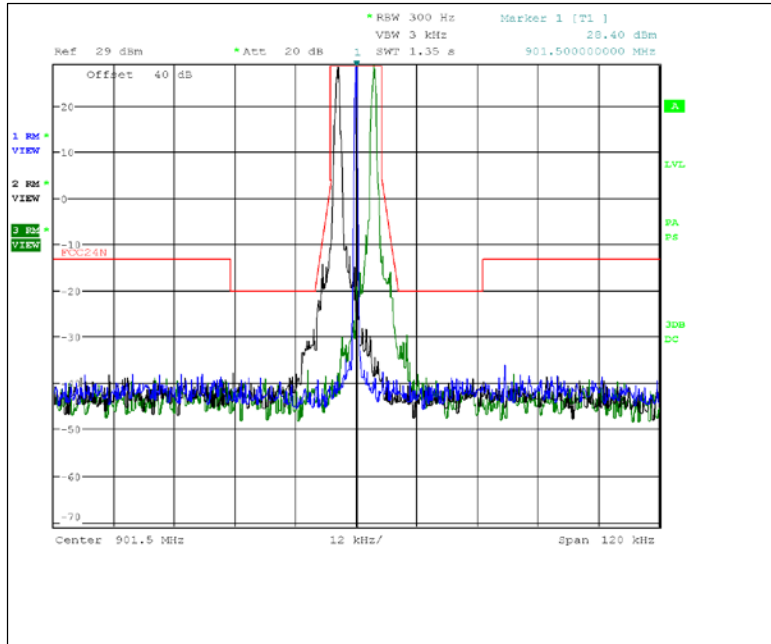


Figure 7.2.2-8: 901.5 MHz – 12.5 kHz Channel Spacing – Boost Mode Offset Channel of +/- 6 (+/- 3600 Hz)

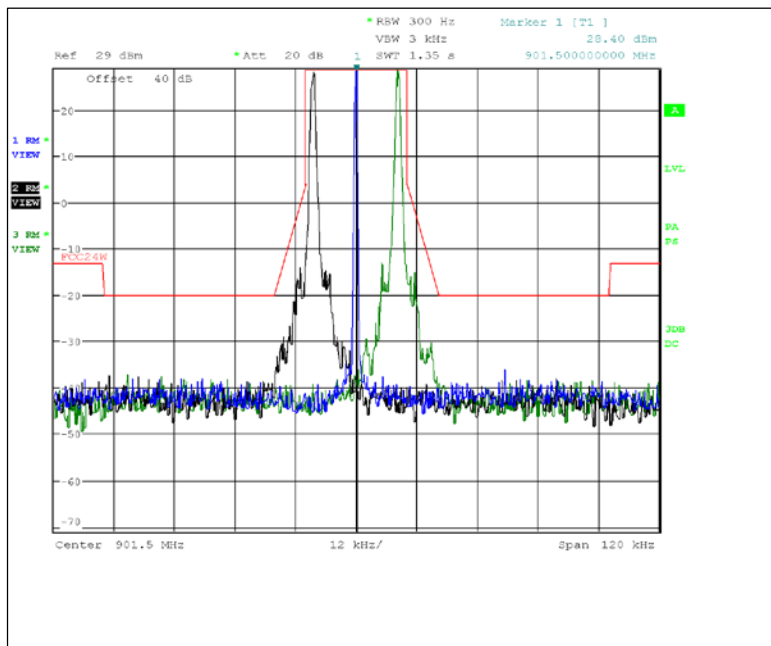


Figure 7.2.2-9: 901.5 MHz – 25 kHz Channel Spacing – Boost Mode Offset Channel of +/- 14 (+/- 8400 Hz)

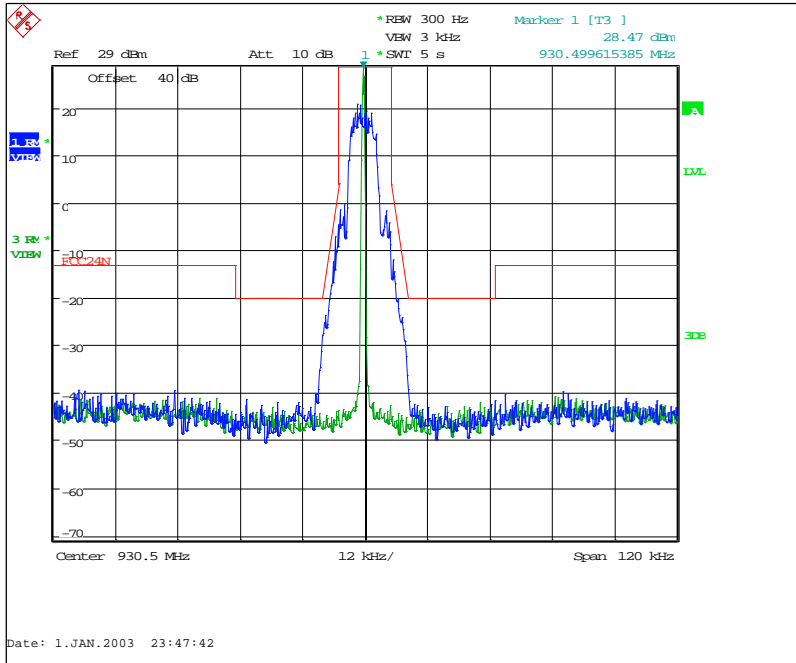


Figure 7.2.2-10: 930.5 MHz - 12.5 kHz Channel Spacing – mPass 5k Mode

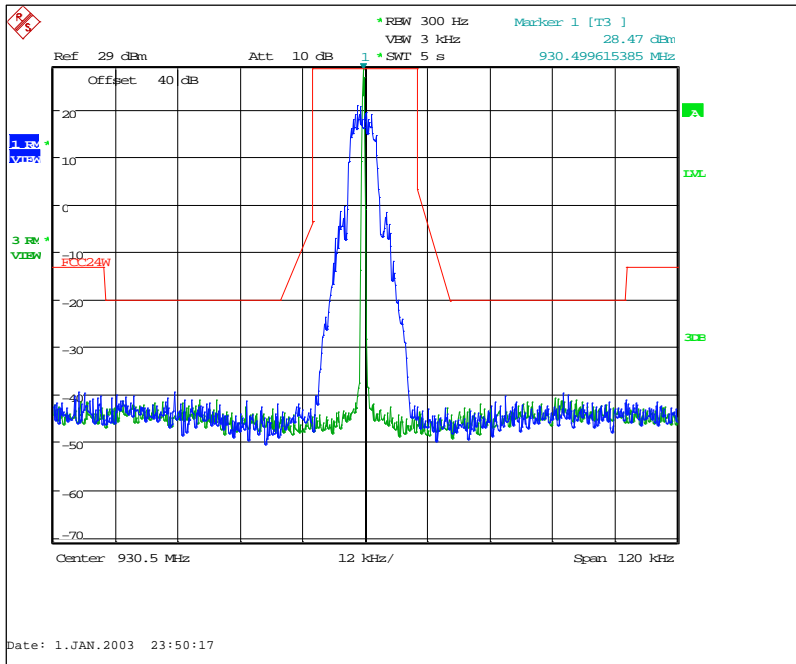


Figure 7.2.2-11: 930.5 MHz – 25 kHz Channel Spacing – mPass 5k Mode

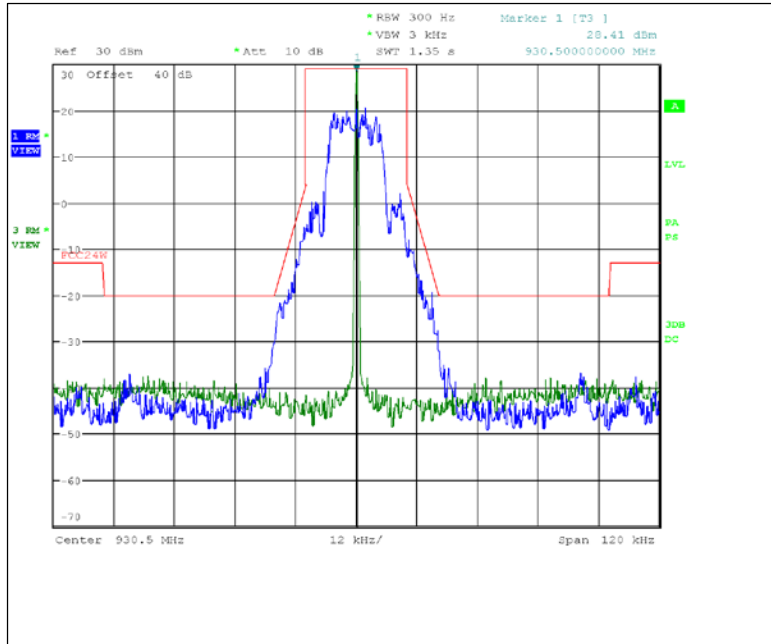


Figure 7.2.2-12: 930.5 MHz – 25 kHz Channel Spacing – mPass 10k Mode

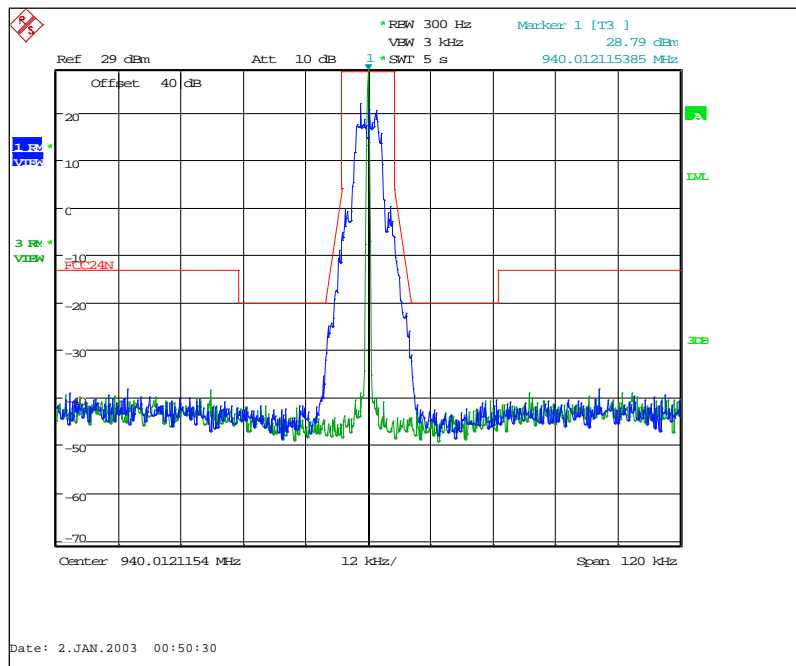


Figure 7.2.2-13: 940.0125 MHz – 12.5 kHz Channel Spacing – mPass 5k Mode

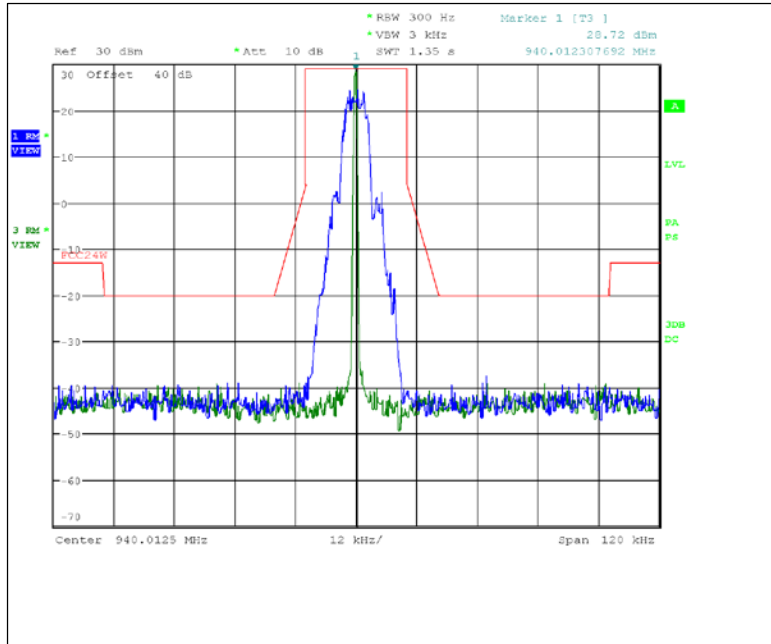


Figure 7.2.2-14: 940.0125 MHz – 25 kHz Channel Spacing – mPass 5k Mode

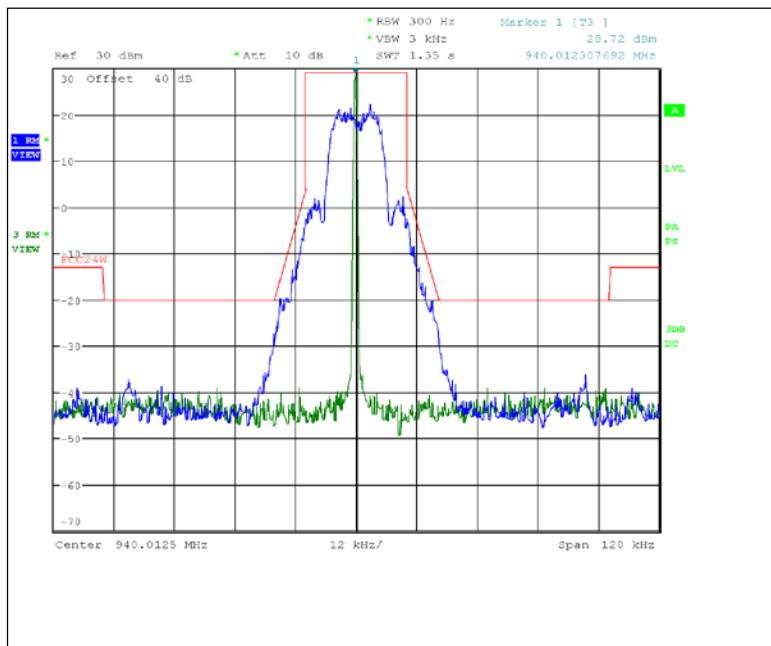


Figure 7.2.2-15: 940.0125 MHz – 25 kHz Channel Spacing – mPass 10k Mode

Part 101.111 a(6), RSS-119 5.8.6 (FCC Part 101.11a(6) provides worst case)

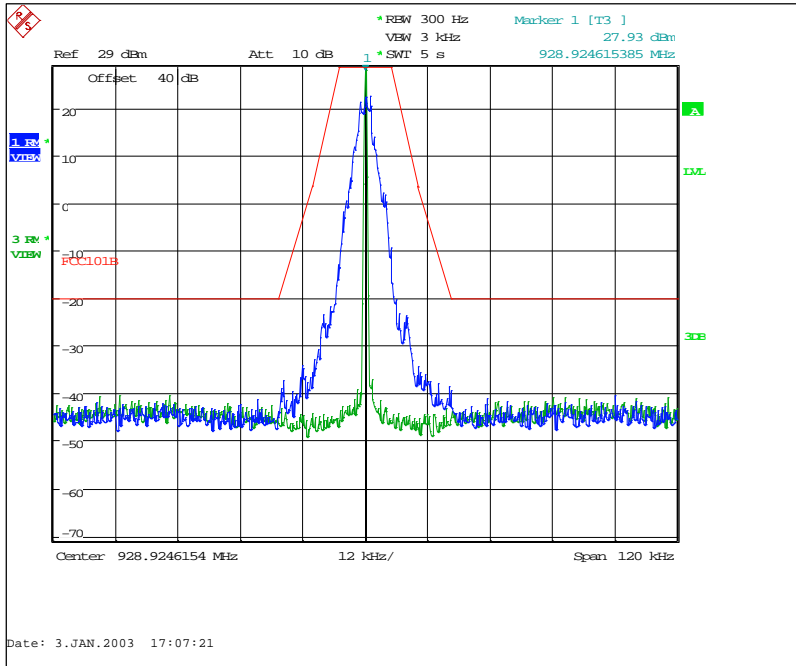


Figure 7.2.2-16: 928.925 MHz – C&I Mode

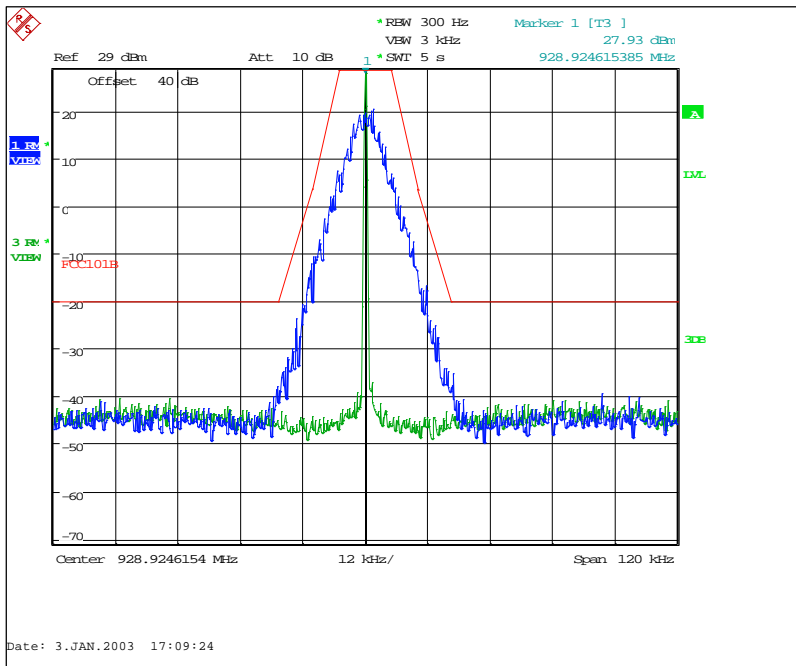


Figure 7.2.2-17: 928.925 MHz – Double Density Mode

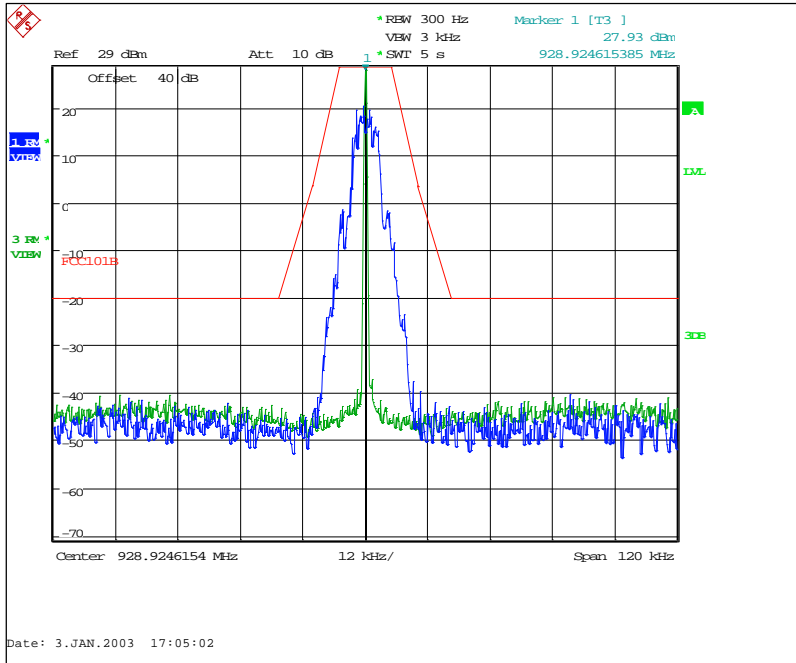


Figure 7.2.2-18: 928.925 MHz – mPass 5k Mode

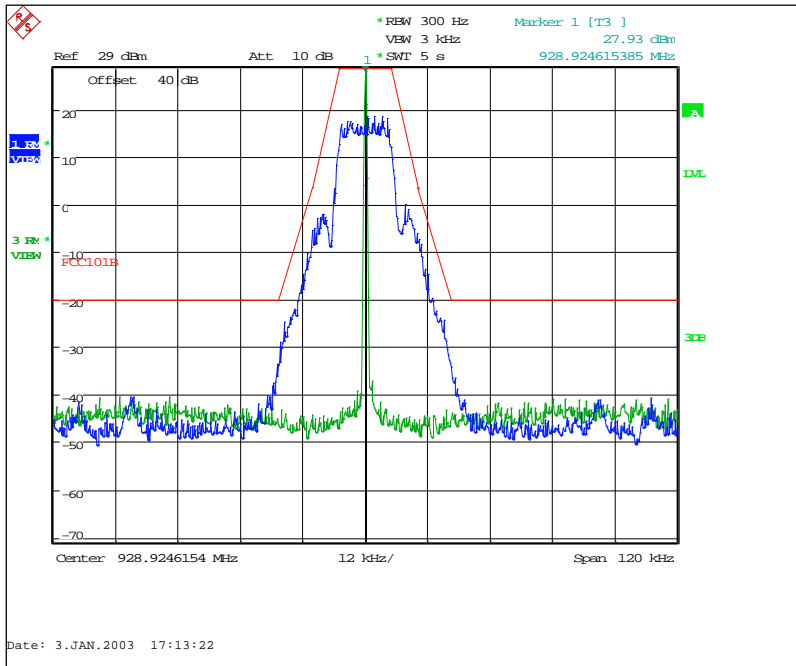


Figure 7.2.2-19: 928.925 MHz – mPass 10k Mode

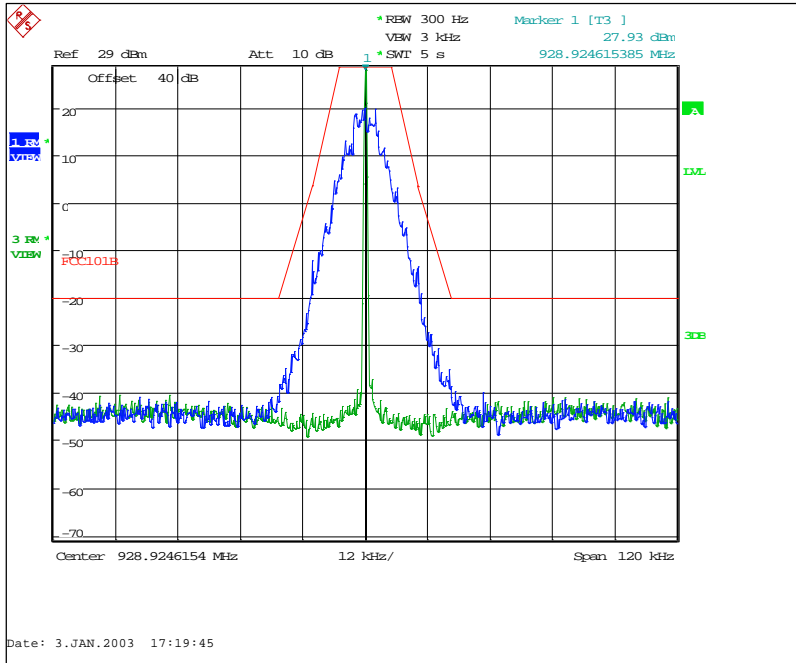


Figure 7.2.2-20: 928.925 MHz – Normal Mode

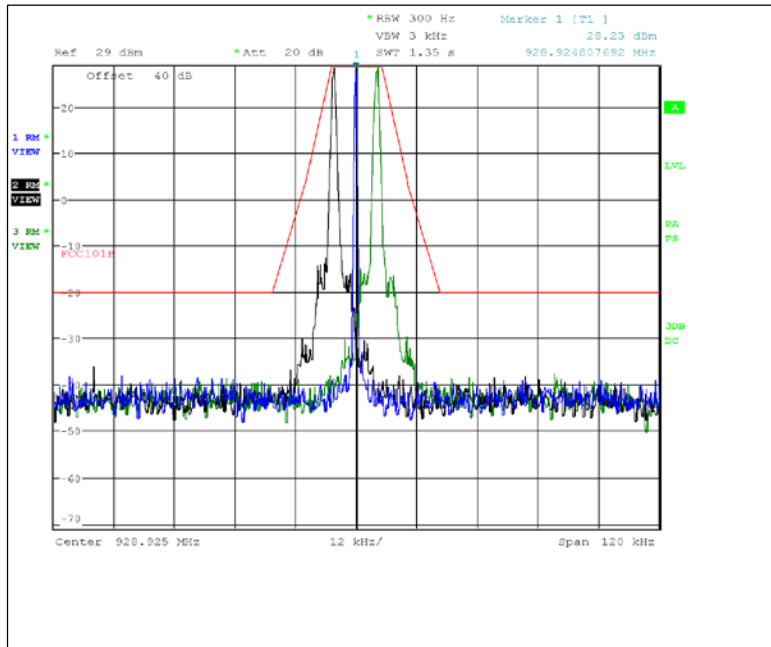


Figure 7.2.2-21: 928.925 MHz — Boost Mode
Offset Channel of +/- 7 (+/- 4200 Hz)

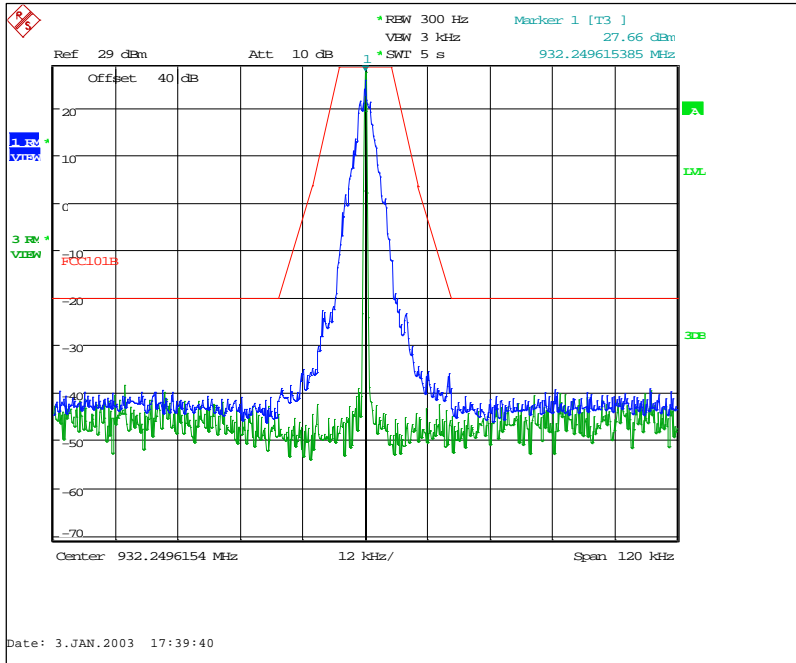


Figure 7.2.2-22: 932.25 MHz – C&I Mode

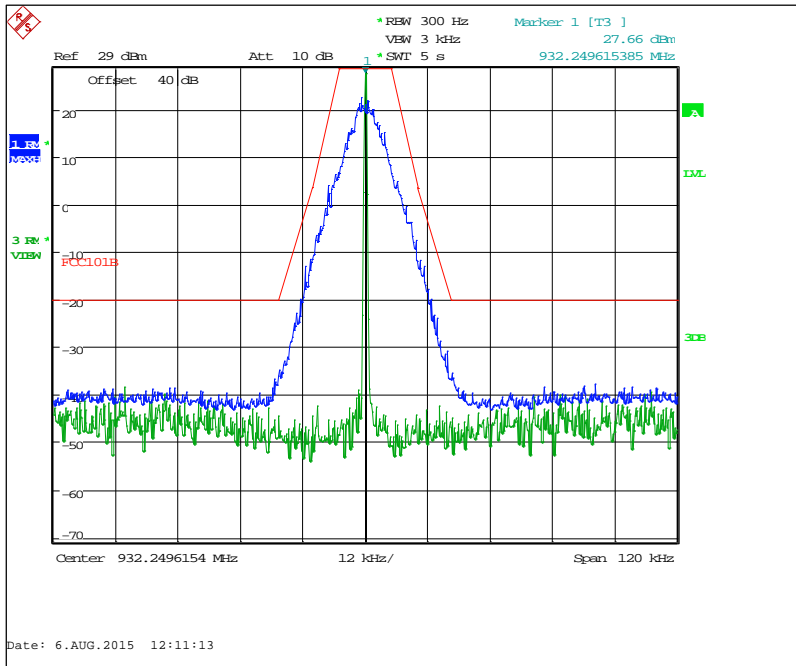


Figure 7.2.2-23: 932.25 MHz – Double Density Mode

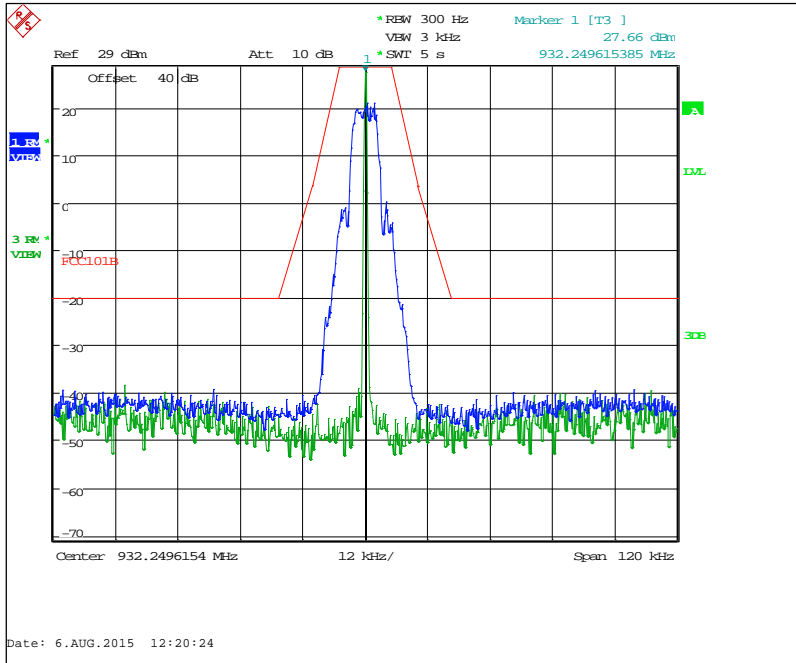


Figure 7.2.2-24: 932.25 MHz – mPass 5k Mode

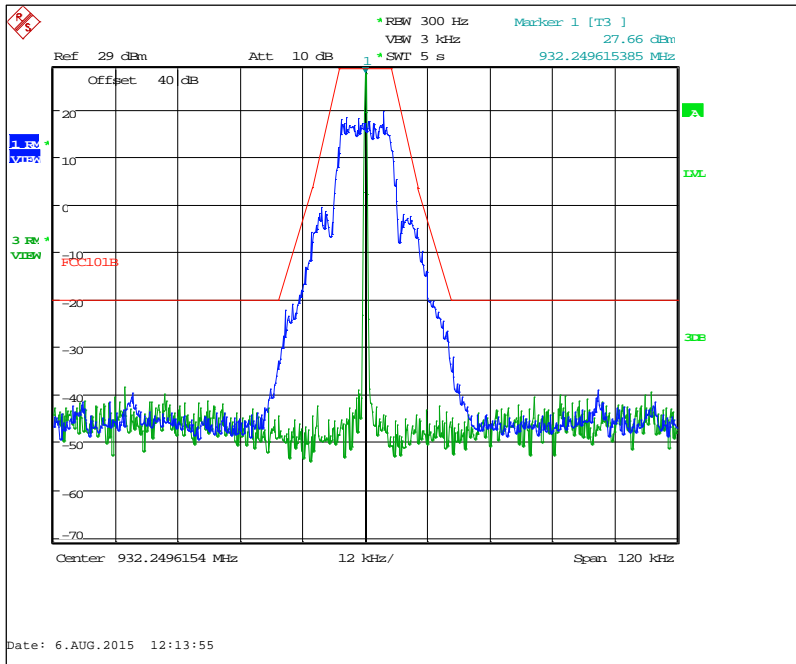


Figure 7.2.2-25: 932.25 MHz – mPass 10k Mode

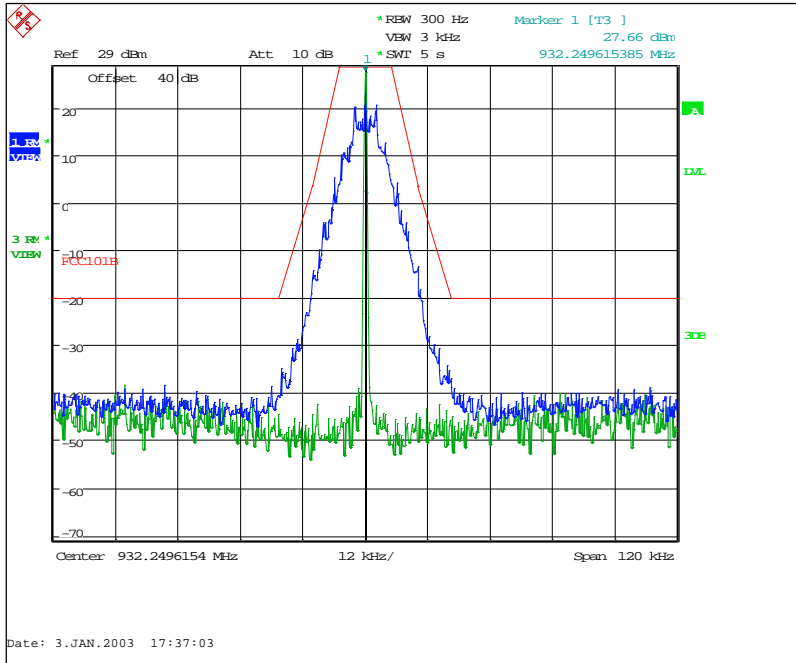


Figure 7.2.2-26: 932.25 MHz – Normal Mode

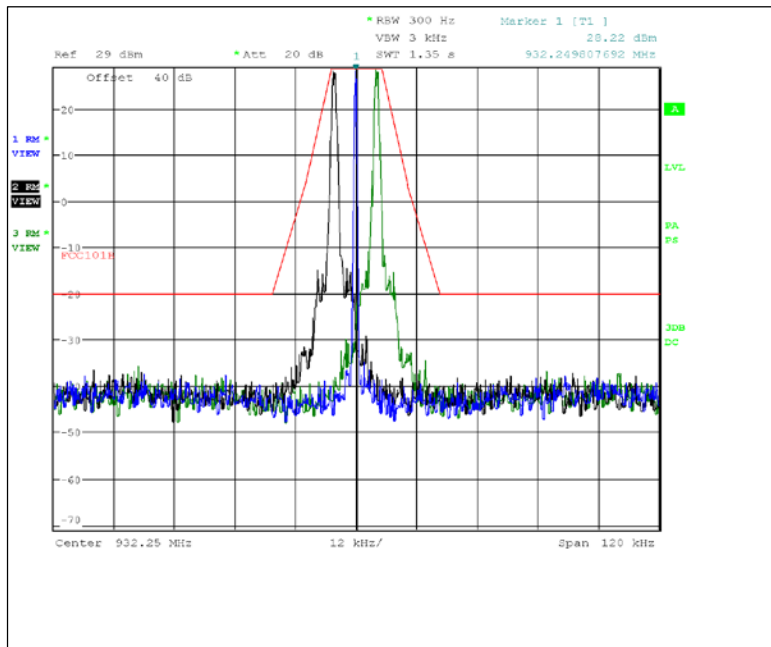


Figure 7.2.2-27: 932.25 MHz — Boost Mode
Offset Channel of +/- 7 (+/- 4200 Hz)

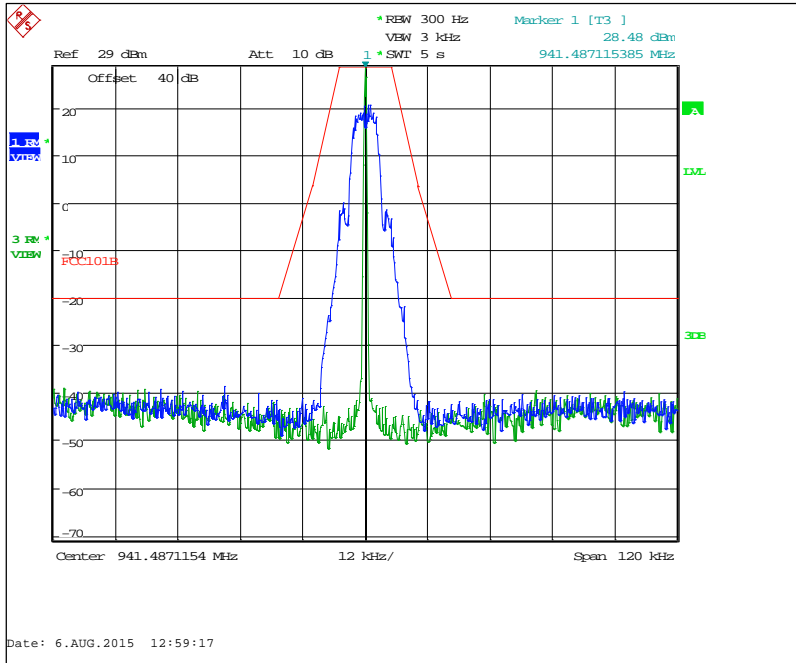


Figure 7.2.2-28: 941.4875 MHz – mPass 5k Mode

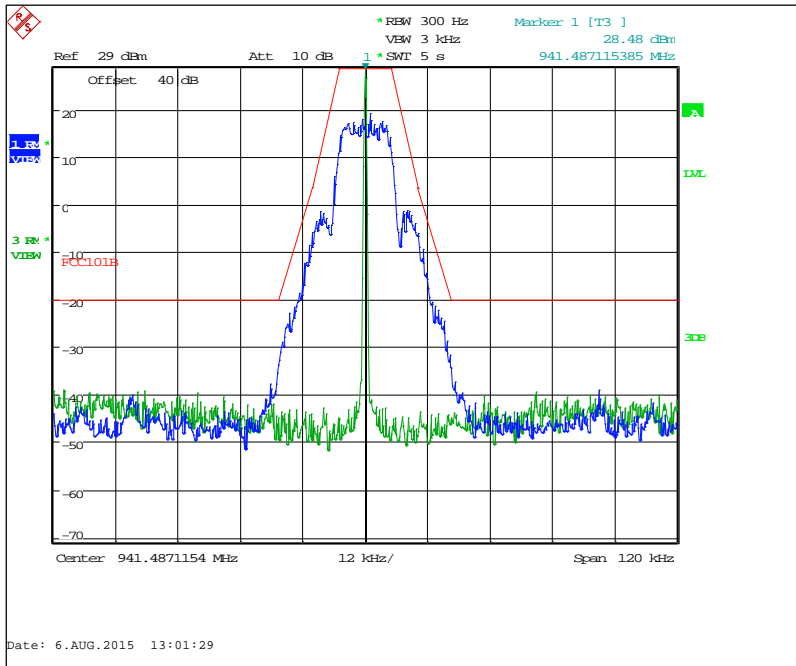


Figure 7.2.2-29: 941.4875 MHz – mPass 10k Mode

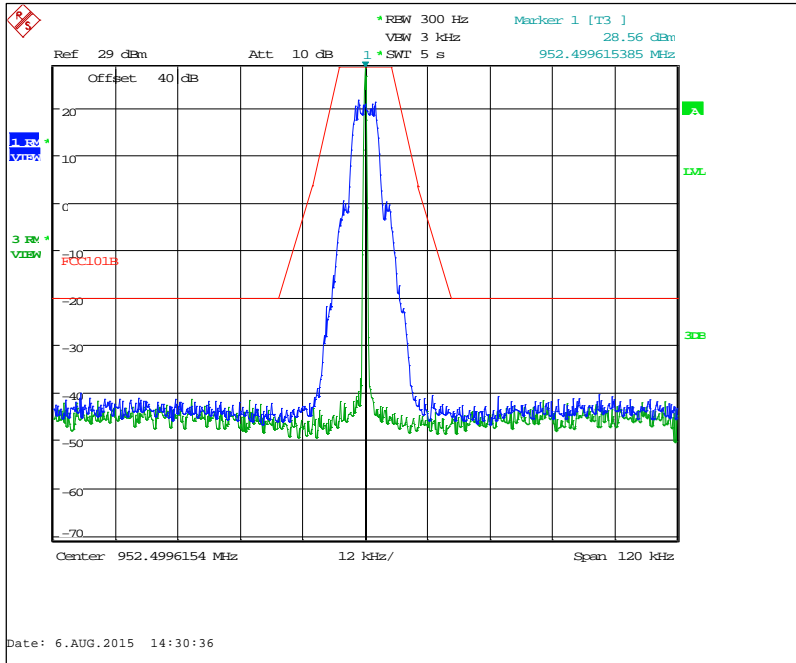


Figure 7.2.2-30: 952.5 MHz – mPass 5k Mode

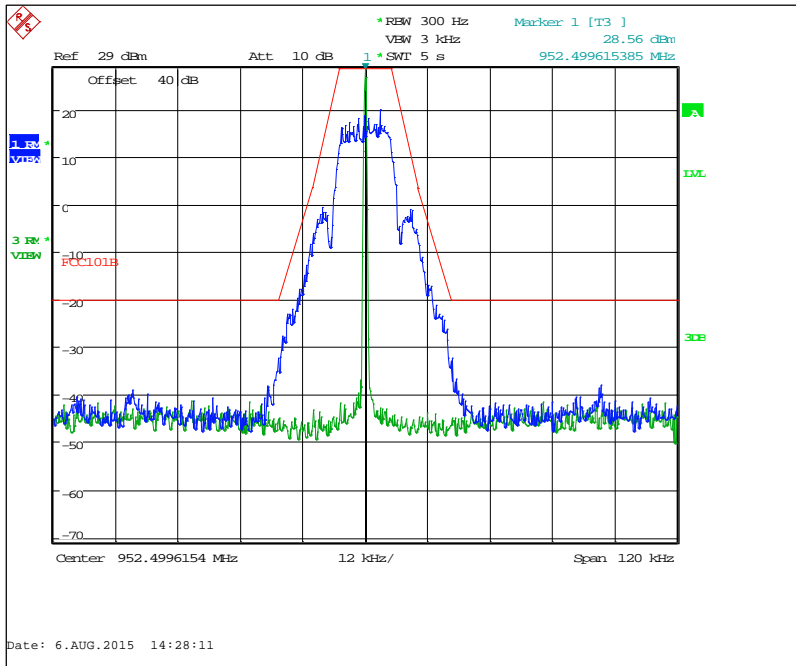


Figure 7.2.2-31: 952.5 MHz – mPass 10k Mode

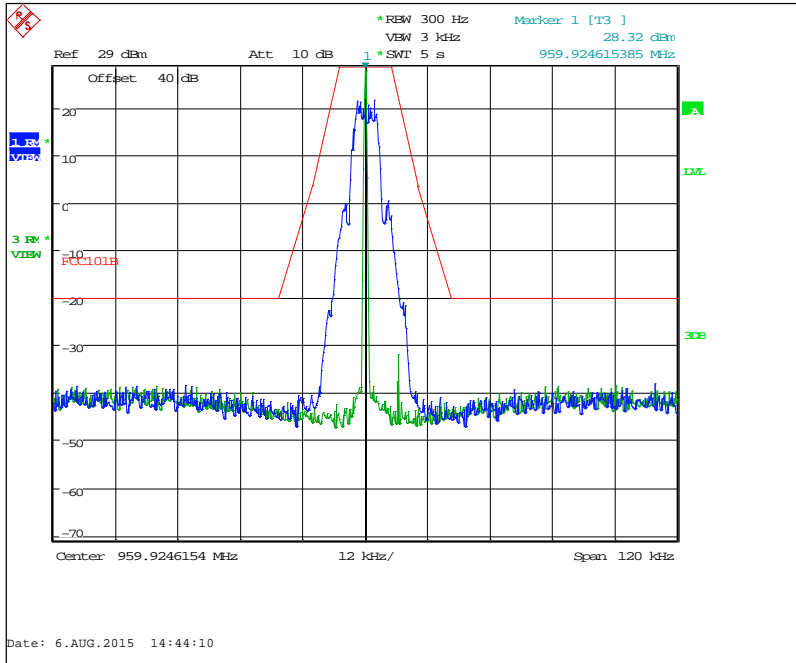


Figure 7.2.2-32: 959.925 MHz – mPass 5k Mode

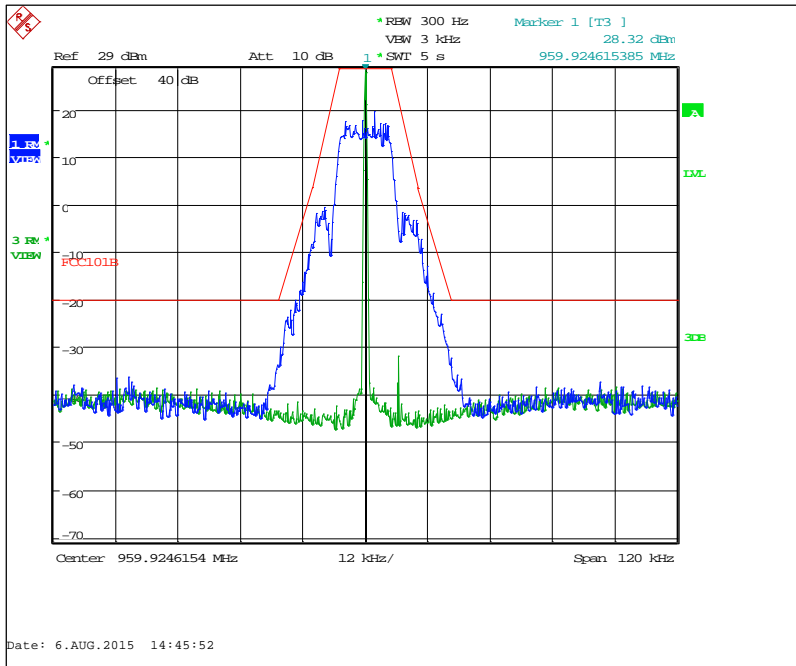


Figure 7.2.2-33: 959.925 MHz – mPass 10k Mode

7.2.3 Measurement Results – 99% Bandwidth

The bandwidth was measured in accordance with RSS-Gen 6.6. The occupied bandwidth measurement function of the spectrum analyzer was used to measure the 99% bandwidth. The span of the analyzer was set to capture all products of the modulation process, including the emission sidebands. The resolution bandwidth was set to 1% to 5% of the occupied bandwidth. The video bandwidth was set to 3 times the resolution bandwidth.

Frequency (MHz)	IC Rule Part	Mode of Operation	99% Bandwidth (kHz)
901.5000	RSS-134	C&I	5.7692
901.5000	RSS-134	Double Density	12.9006
901.5000	RSS-134	Normal	11.6186
901.5000	RSS-134	Boost	1.2019
930.5000	RSS-134	mPass 5k	5.8333
930.5000	RSS-134	mPass 10k	11.7788
940.0125	RSS-134	mPass 5k	5.8654
940.0125	RSS-134	mPass 10k	11.9390
928.9250	RSS-119	C&I	5.8974
928.9250	RSS-119	Double Density	12.7404
928.9250	RSS-119	Normal	11.5385
928.9250	RSS-119	Boost	1.1217
932.2500	RSS-119	C&I	5.9936
932.2500	RSS-119	Double Density	12.5000
932.2500	RSS-119	Normal	11.4583
932.2500	RSS-119	Boost	1.2820
941.4875	RSS-119	mPass 5k	5.8333
941.4875	RSS-119	mPass 10k	11.9391
952.5000	RSS-119	mPass 5k	5.8333
952.5000	RSS-119	mPass 10k	11.9391

IC RSS-GEN 6.6, IC RSS-134

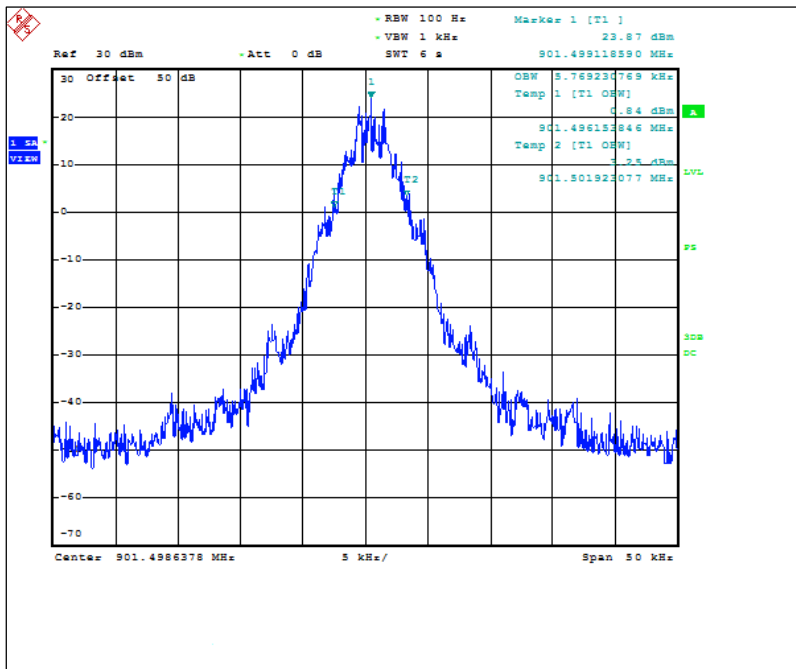


Figure 7.2.3-1: 901.5 MHz – C&I Mode

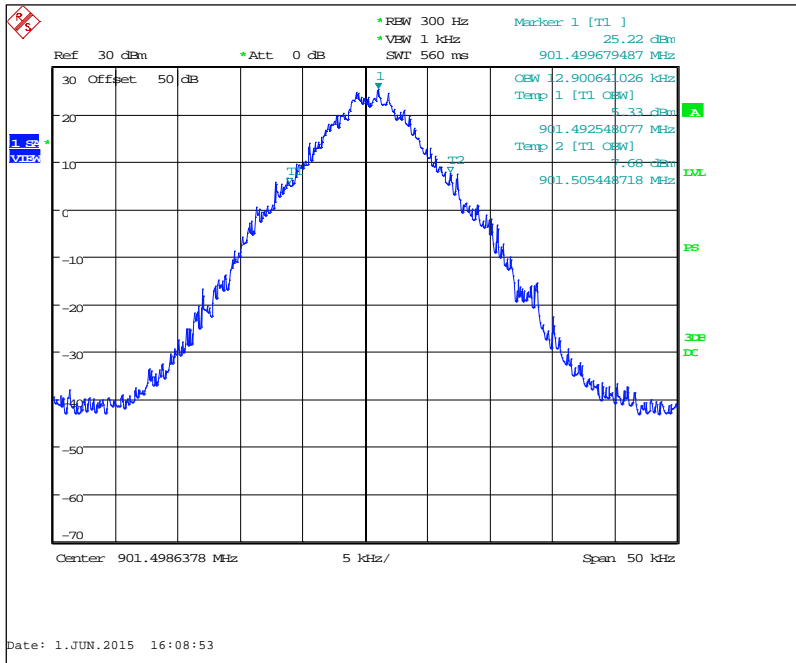


Figure 7.2.3-2: 901.5 MHz – Double Density Mode

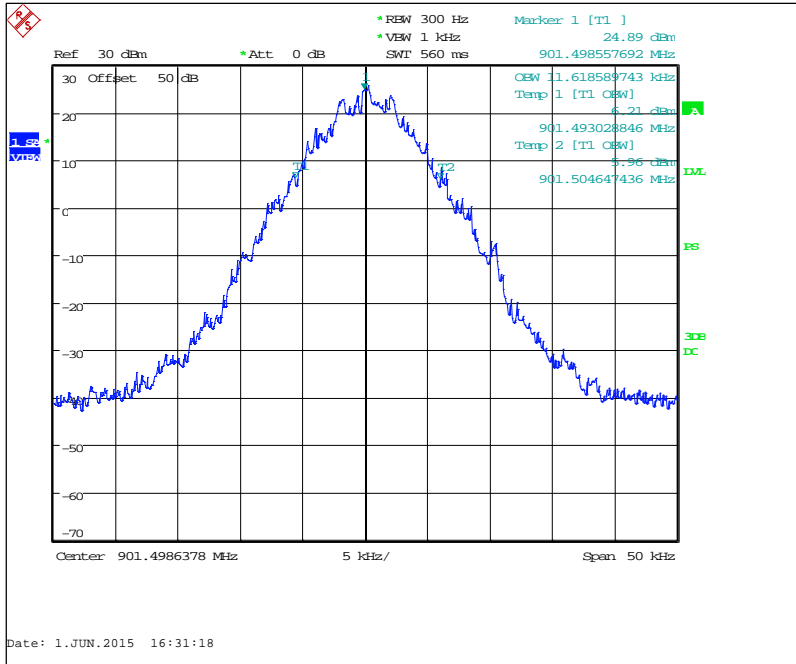


Figure 7.2.3-3: 901.5 MHz – Normal Mode

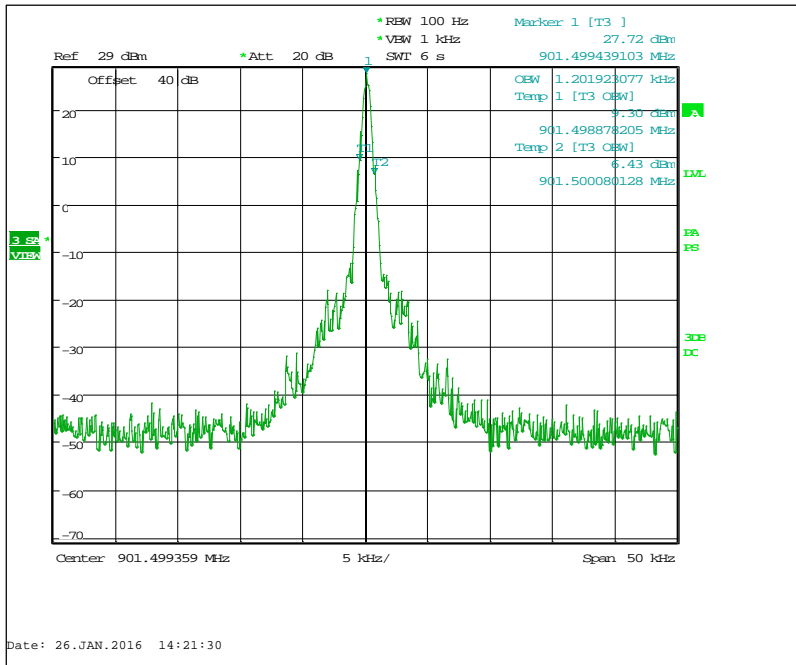


Figure 7.2.3-4: 901.5 MHz – Boost Mode

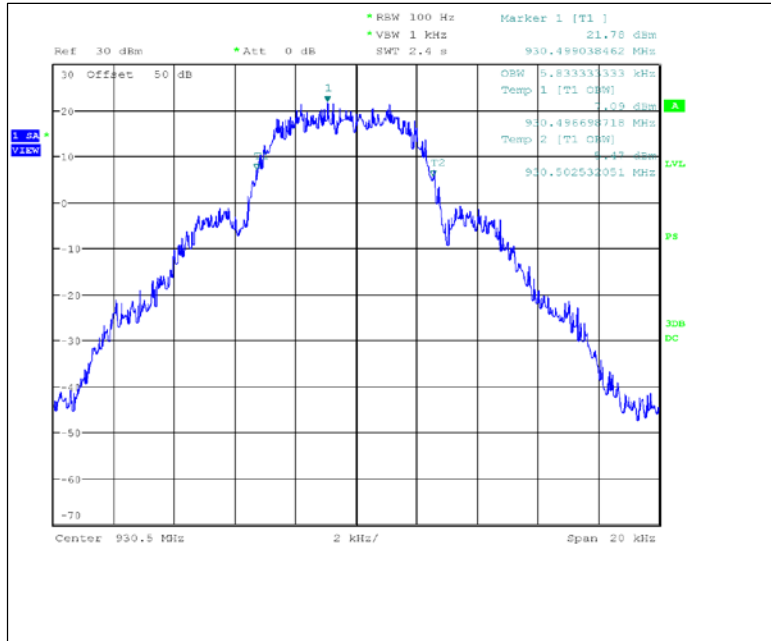


Figure 7.2.3-5: 930.5 MHz – mPass 5k Mode

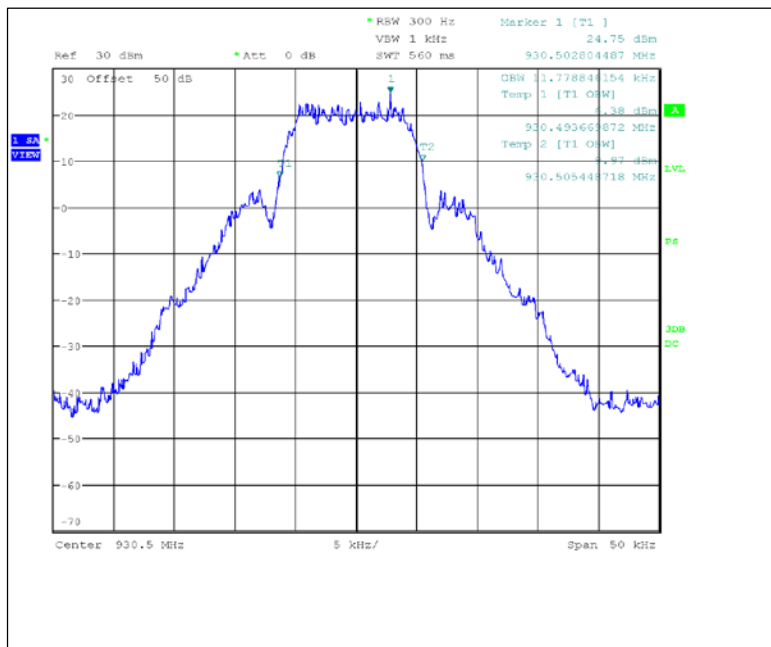


Figure 7.2.3-6: 930.5 MHz – mPass 10k Mode

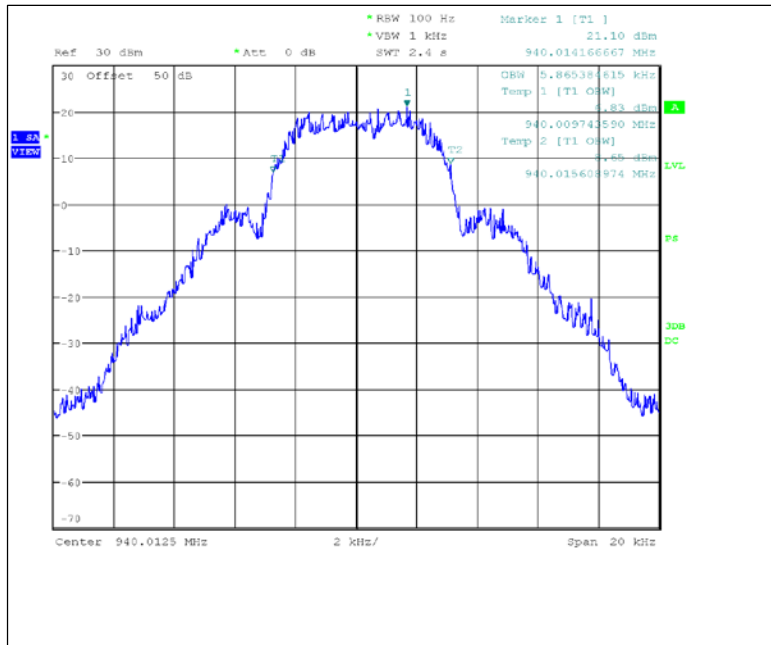


Figure 7.2.3-7: 940.0125 MHz – mPass 5k Mode

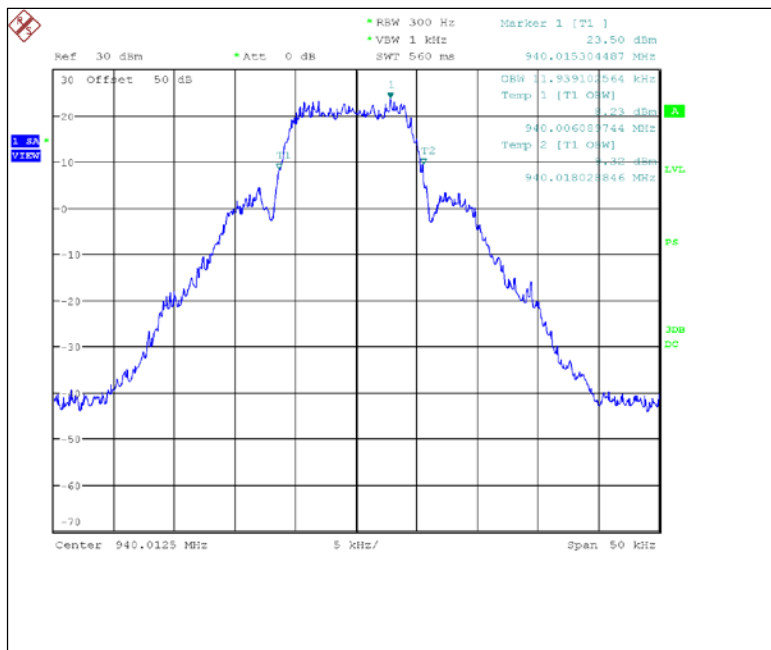


Figure 7.2.3-8: 940.0125 MHz – mPass 10k Mode

RSS-Gen 6.6, RSS-119

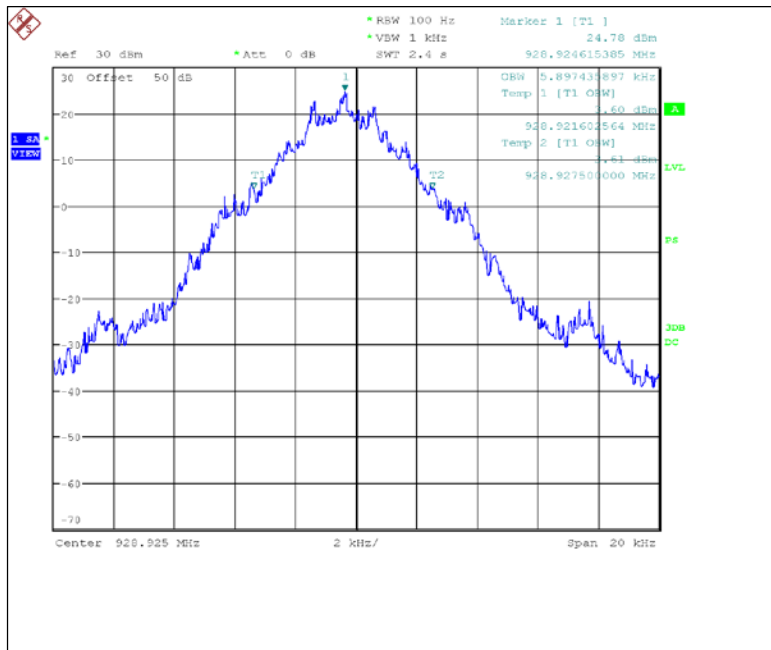


Figure 7.2.3-9: 928.925 MHz – C&I Mode

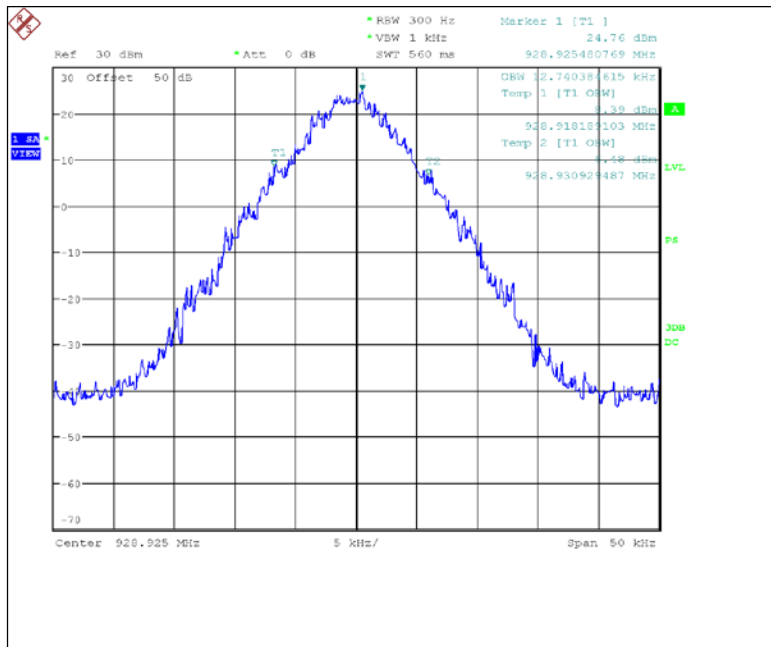


Figure 7.2.3-10: 928.925 MHz – Double Density Mode

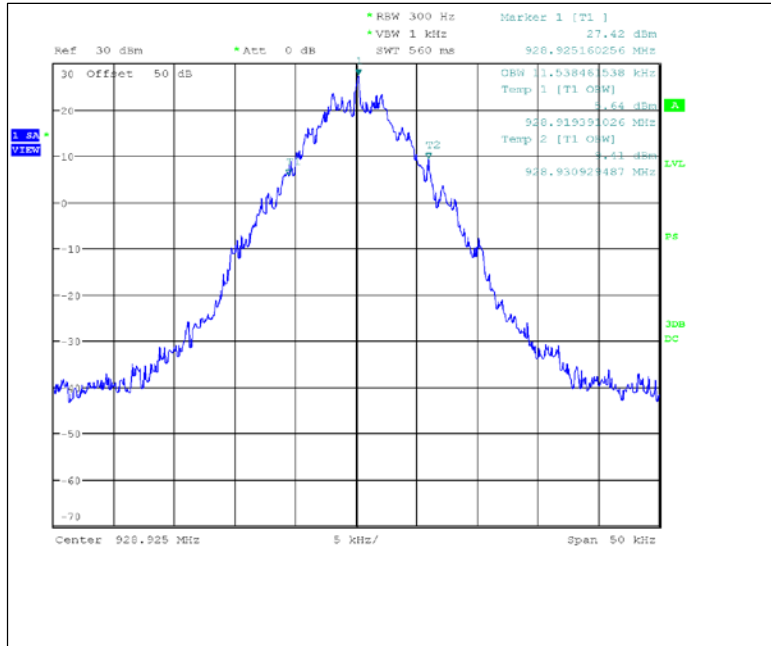


Figure 7.2.3-11: 928.925 MHz – Normal Mode

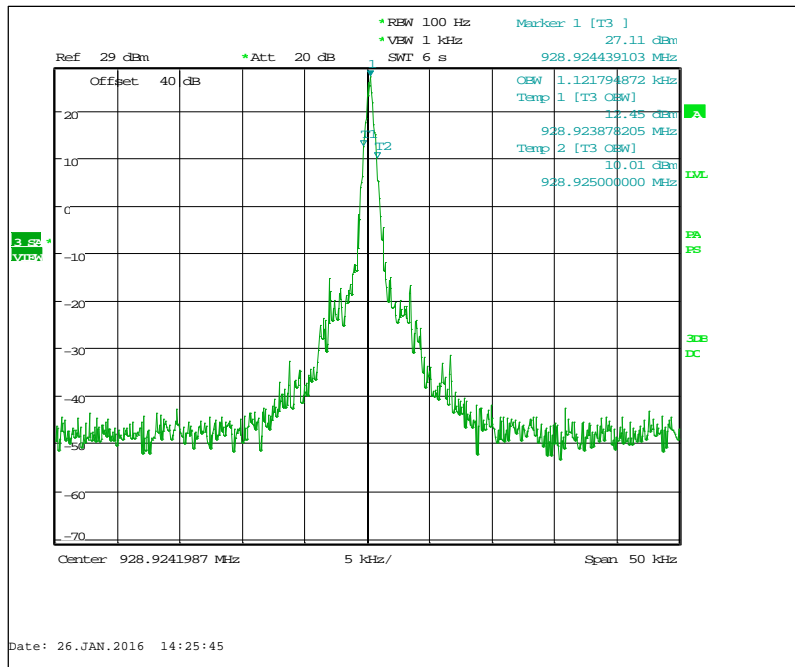


Figure 7.2.3-12: 928.925 MHz — Boost Mode

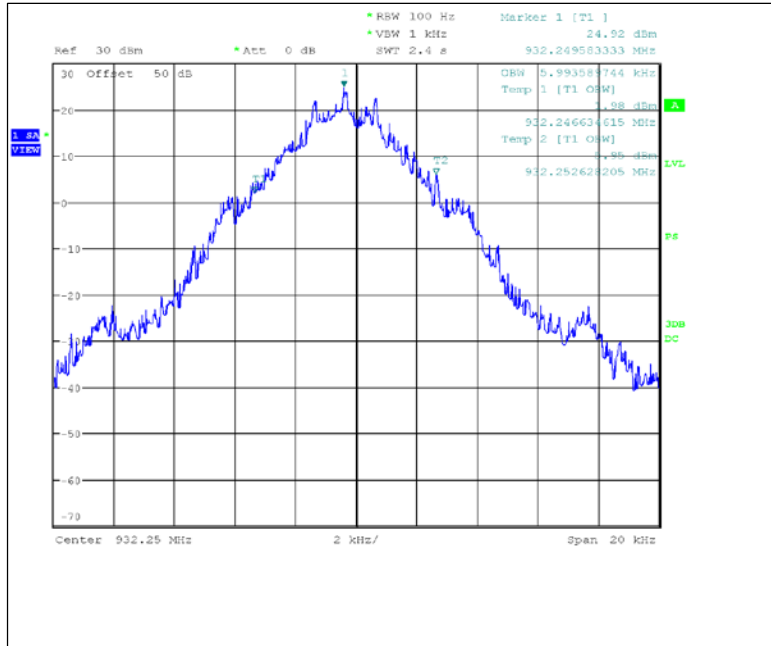


Figure 7.2.3-13: 932.25 MHz – C&I Mode

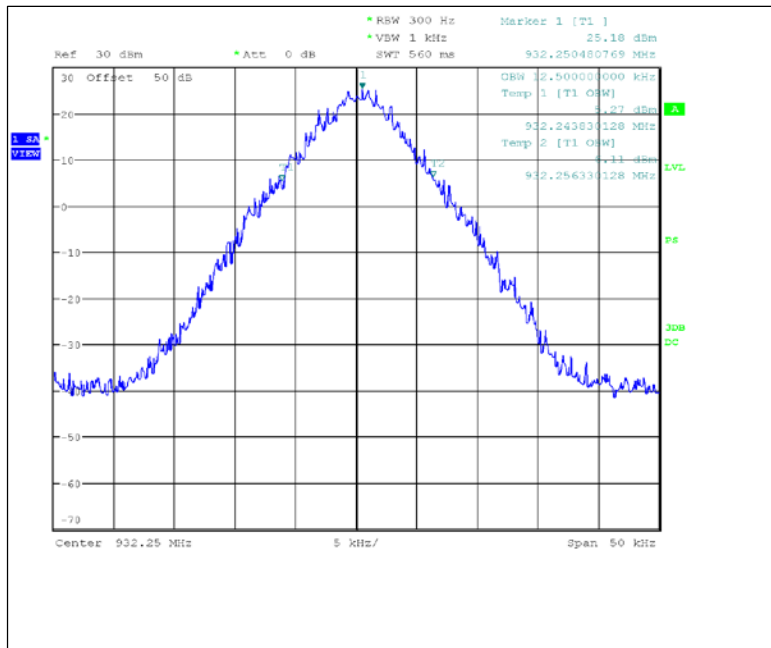


Figure 7.2.3-14: 932.25 MHz – Double Density Mode

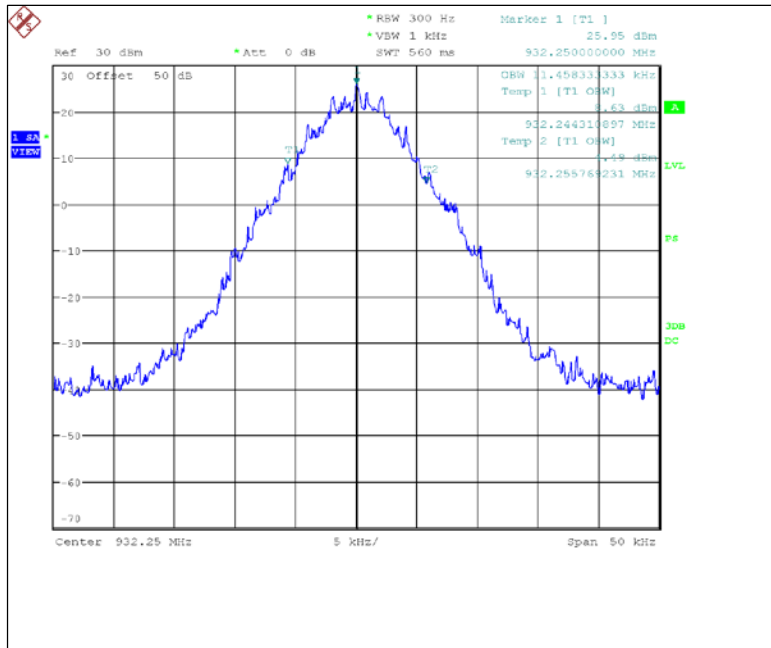


Figure 7.2.3-15: 932.25 MHz – Normal Mode

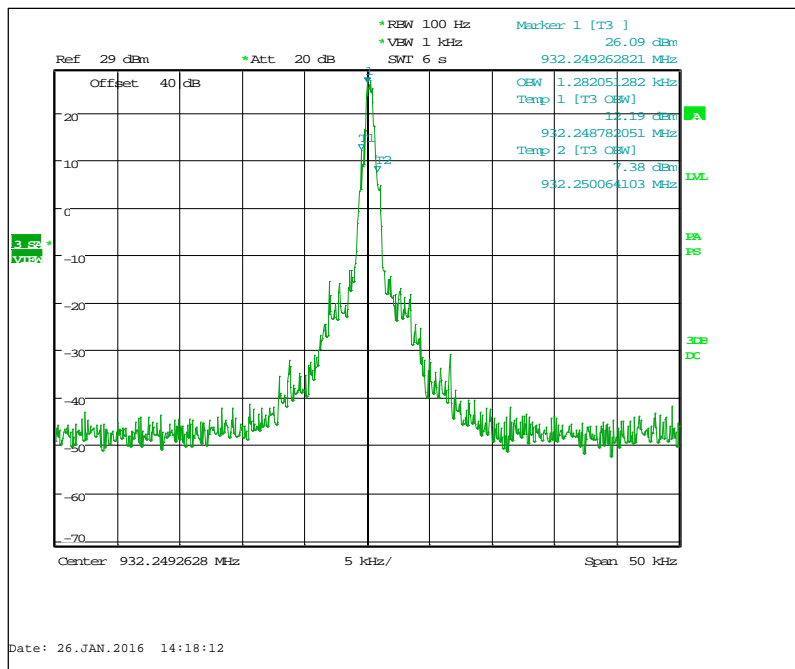


Figure 7.2.3-16: 932.25 MHz — Boost Mode

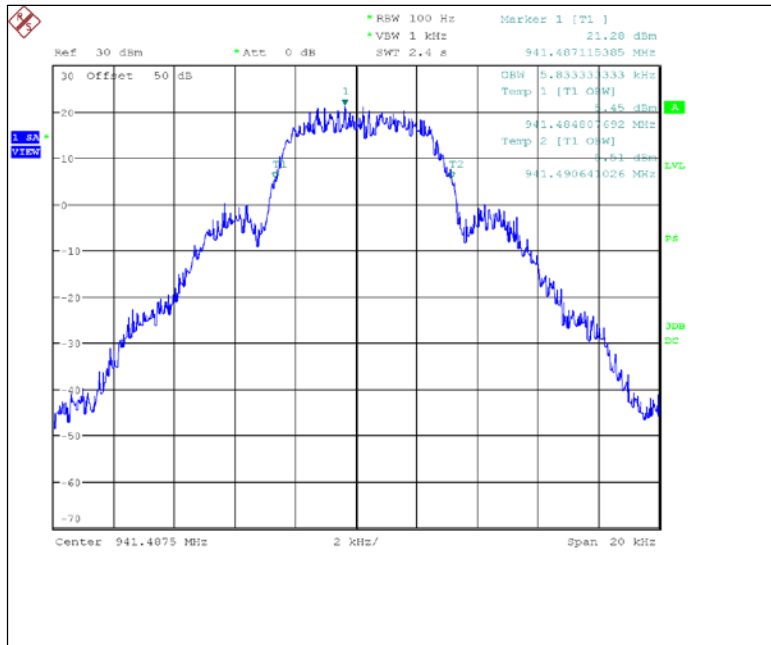


Figure 7.2.3-17: 941.4875 MHz – mPass 5k Mode

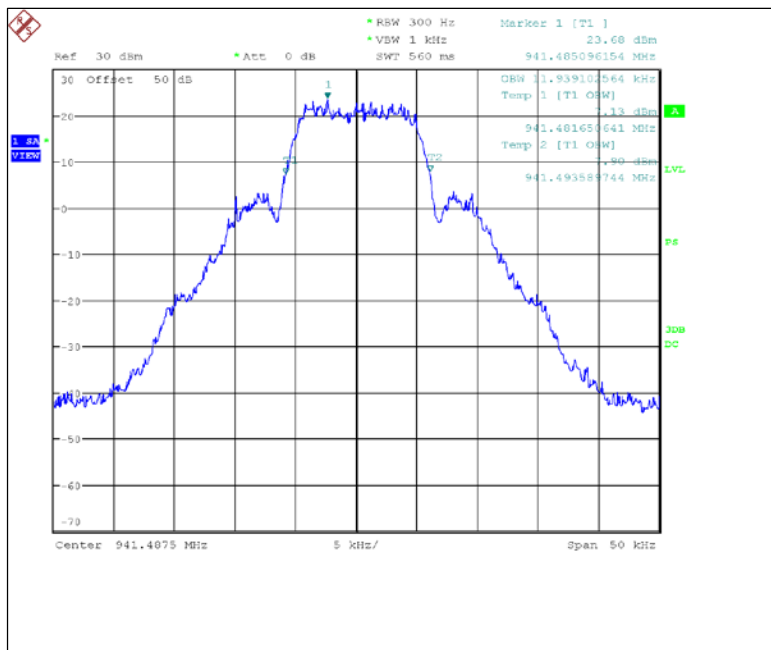


Figure 7.2.3-18: 941.4875 MHz – mPass 10k Mode

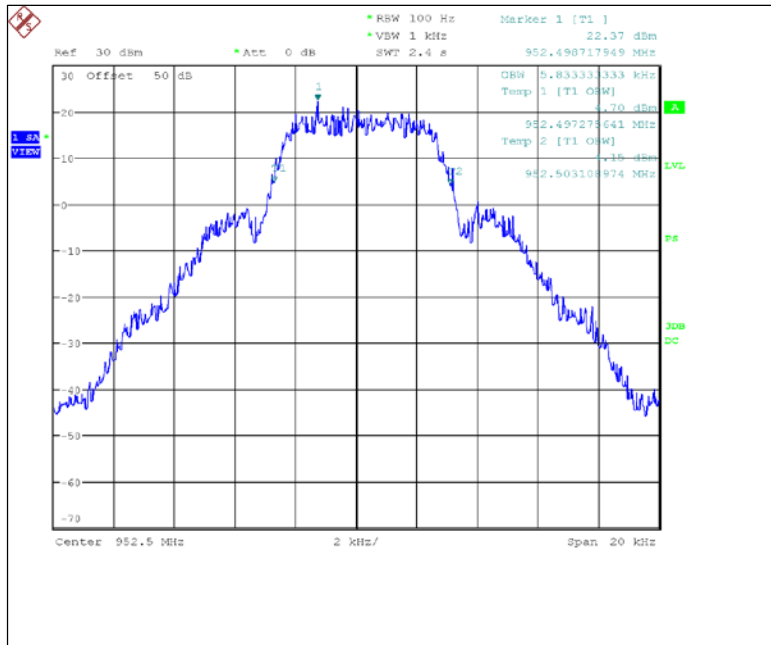


Figure 7.2.3-19: 952.5 MHz – mPass 5k Mode

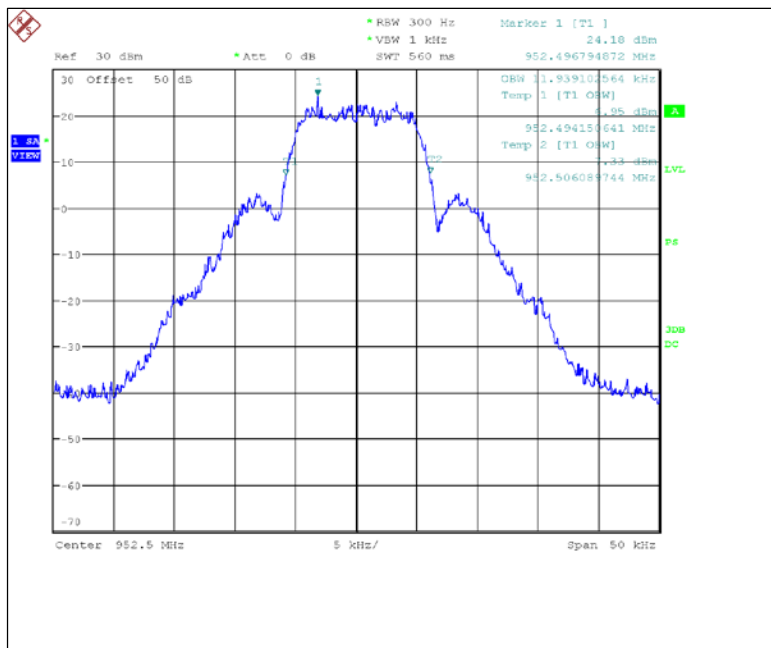


Figure 7.2.3-20: 952.5 MHz – mPass 10k Mode

7.3 Spurious Emissions at Antenna Terminals

7.3.1 Measurement Procedure

The RF output of the equipment under test was directly connected to the input of the spectrum analyzer through 40 dB of passive attenuation. The spectrum analyzer resolution bandwidth was set to 100 kHz below 1000 MHz and 1 MHz above 1000 MHz. The internal correction factors of the spectrum analyzer were employed to correct for any cable, attenuator or filter losses. The spectrum was investigated in accordance to CFR 47 Part 2.1057. Results are shown below.

7.3.2 Measurement Results

Part 24.133 a(1), a(2), IC RSS-134 6.3(i), (ii)

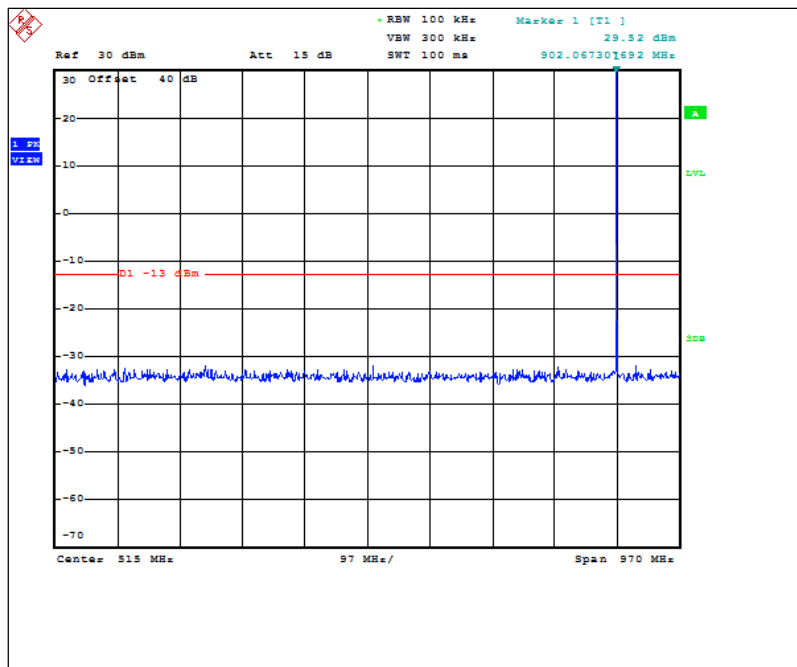


Figure 7.3.2-1: 901.5 MHz – 30MHz to 1GHz (ILSI TCXO)

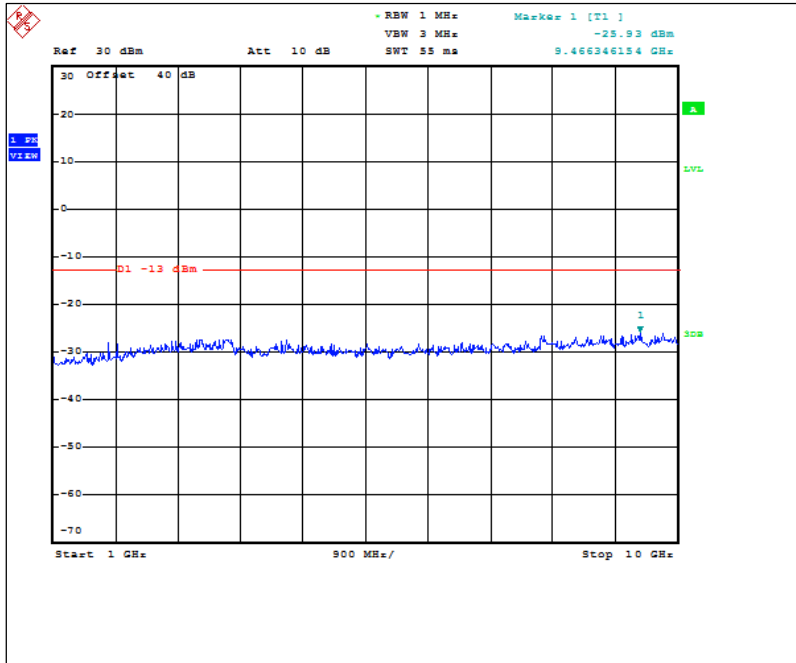


Figure 7.3.2-2: 901.5 MHz – 1GHz to 10GHz (ILSI TCXO)

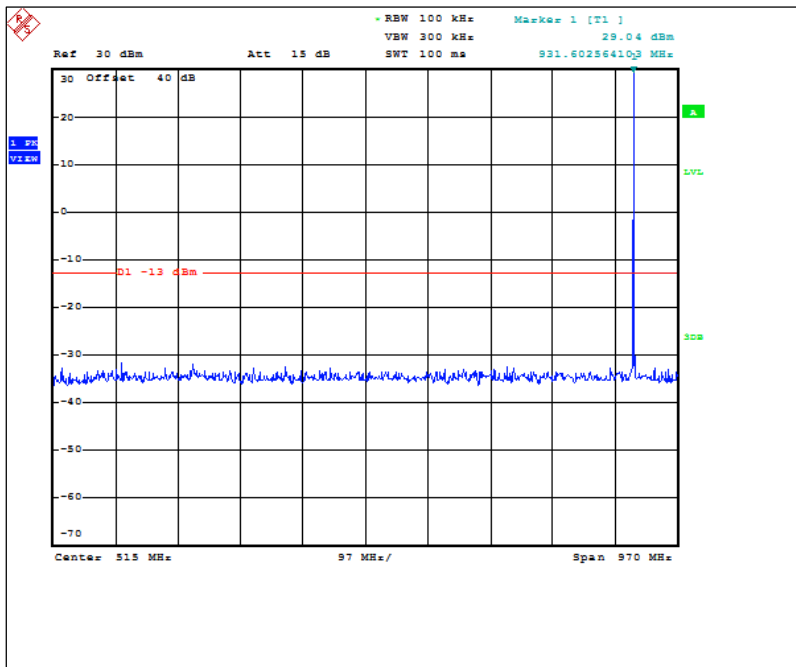


Figure 7.3.2-3: 930.5 MHz – 30MHz to 1GHz (ILSI TCXO)

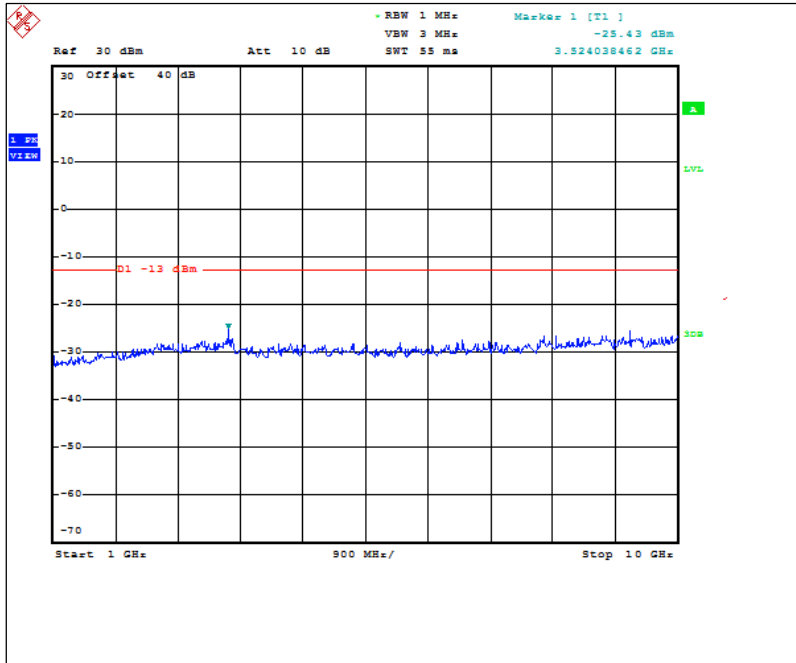


Figure 7.3.2-4: 930.5 MHz – 1GHz to 10GHz (ILSI TCXO)

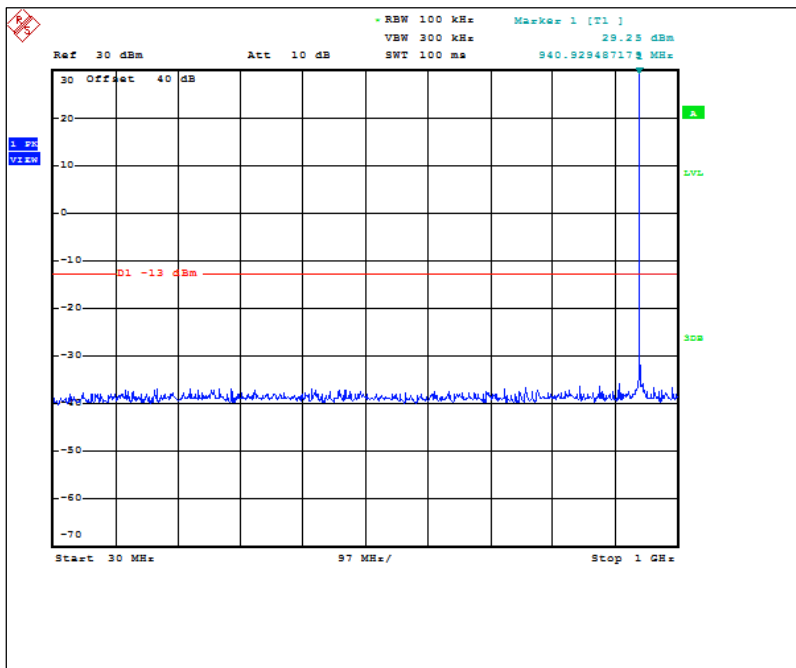


Figure 7.3.2-5: 940.0125 MHz – 30MHz to 1GHz (ILSI TCXO)

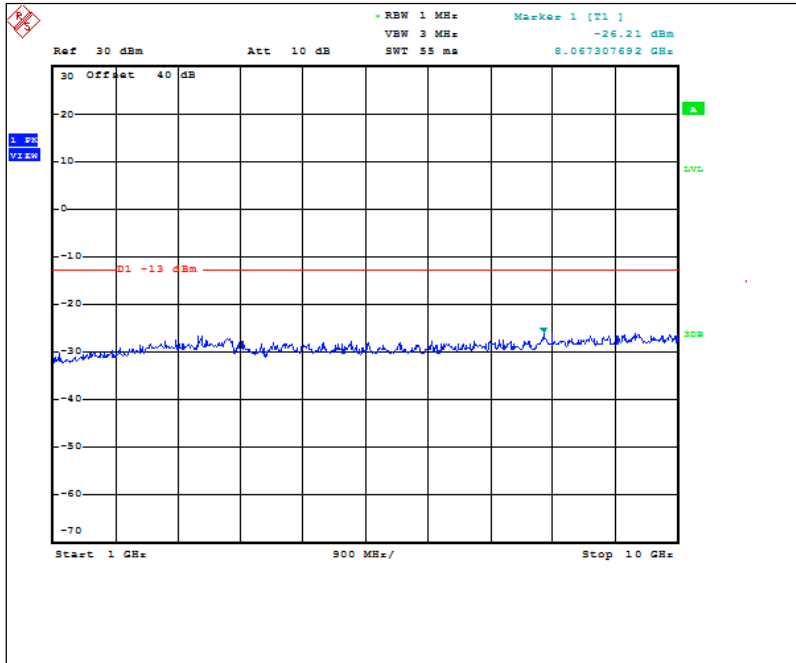


Figure 7.3.2-6: 940.0125 MHz – 1GHz to 10GHz (ILSI TCXO)

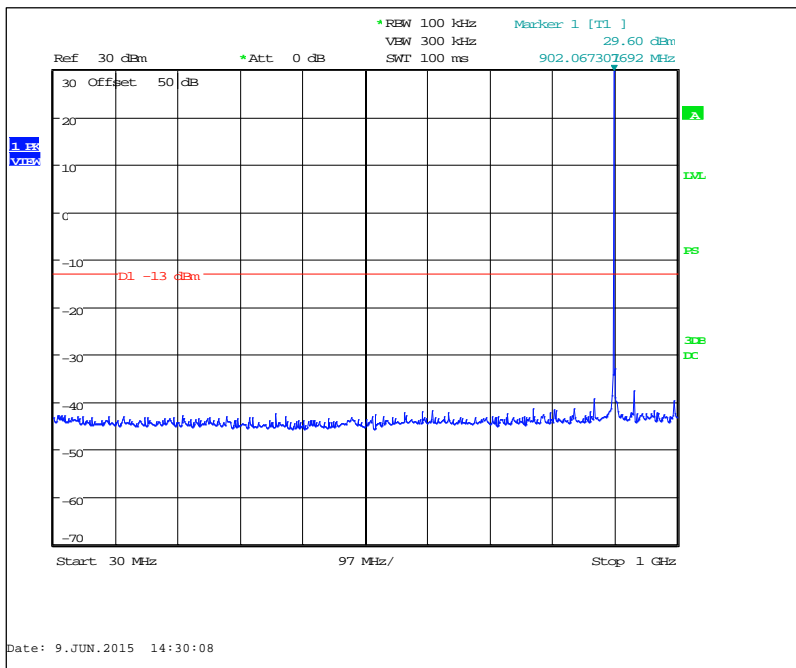


Figure 7.3.2-7: 901.5 MHz – 30MHz to 1GHz (KDS TCXO)

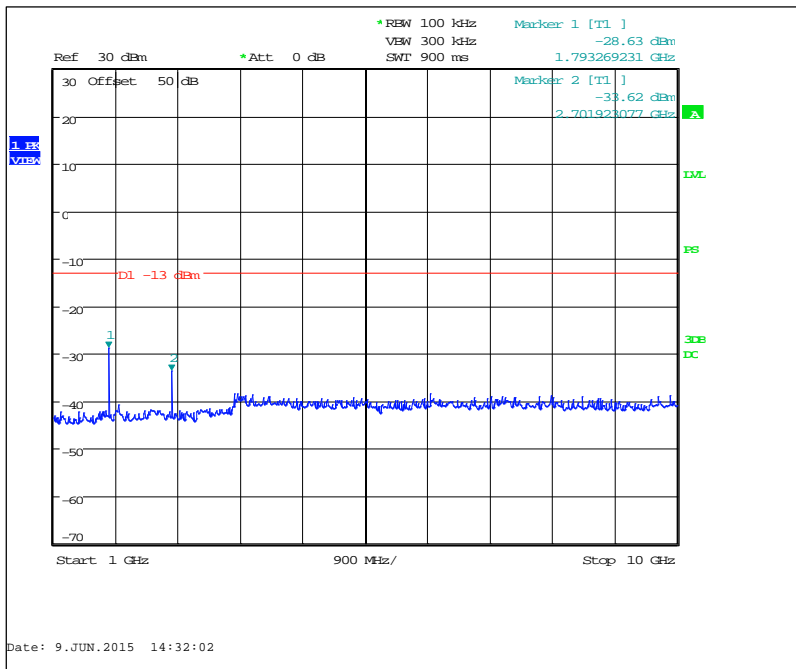


Figure 7.3.2-8: 901.5 MHz – 1GHz to 10GHz (KDS TCXO)

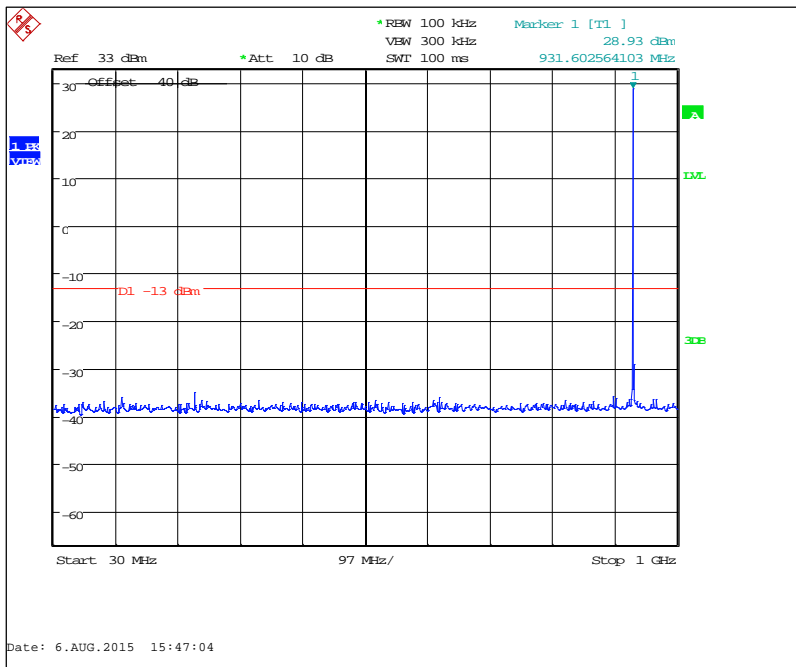


Figure 7.3.2-9: 930.5 MHz – 30MHz to 1GHz (KDS TCXO)

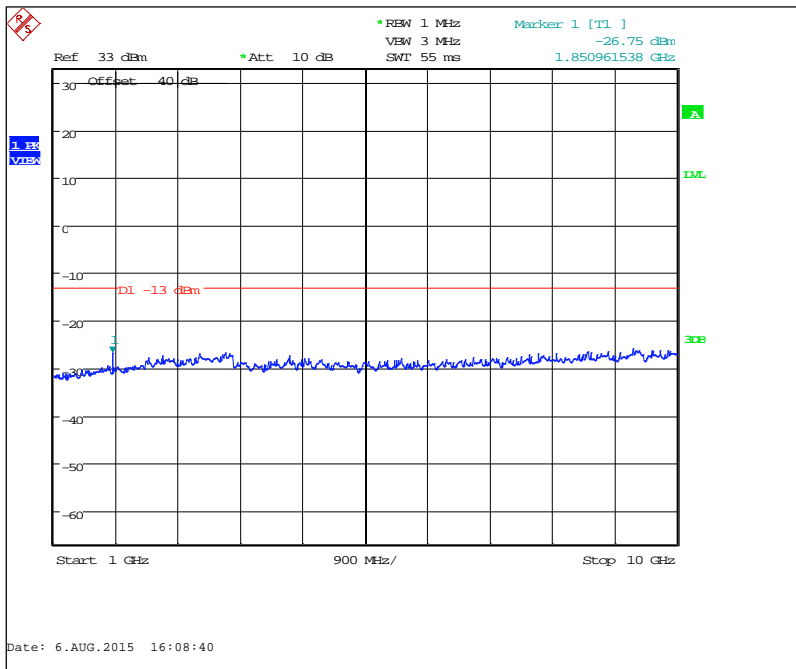


Figure 7.3.2-10: 930.5 MHz – 1GHz to 10GHz (KDS TCXO)

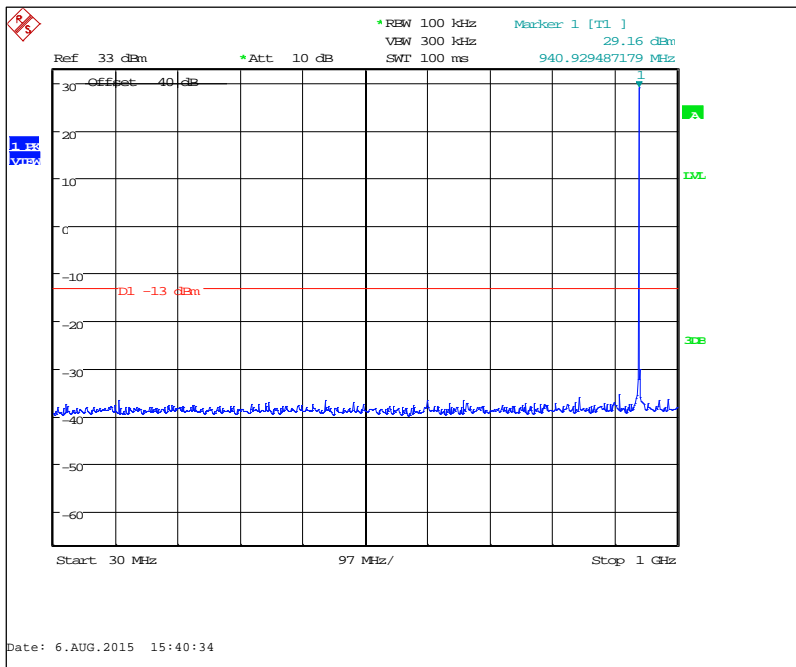


Figure 7.3.2-11: 940.0125 MHz – 30MHz to 1GHz (KDS TCXO)

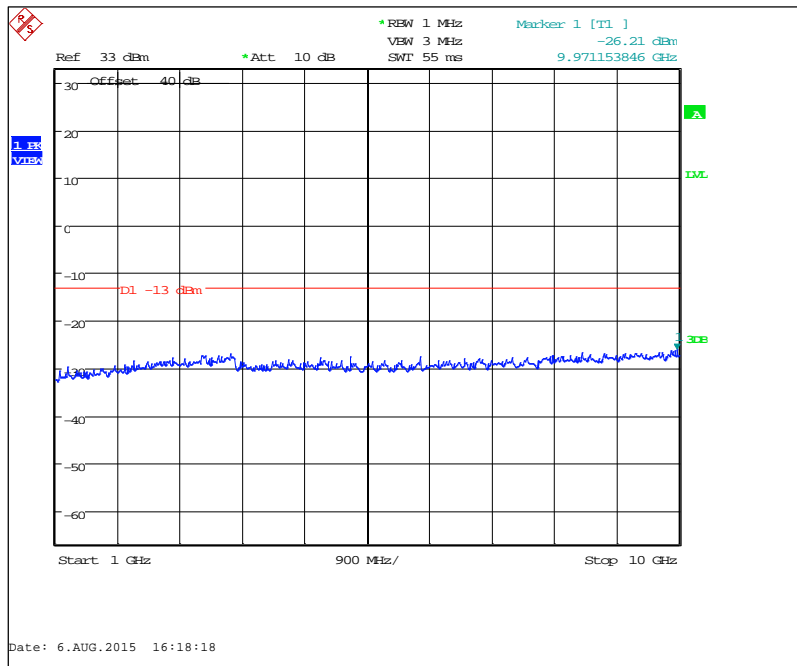


Figure 7.3.2-12: 940.0125 MHz – 1GHz to 10GHz (KDS TCXO)

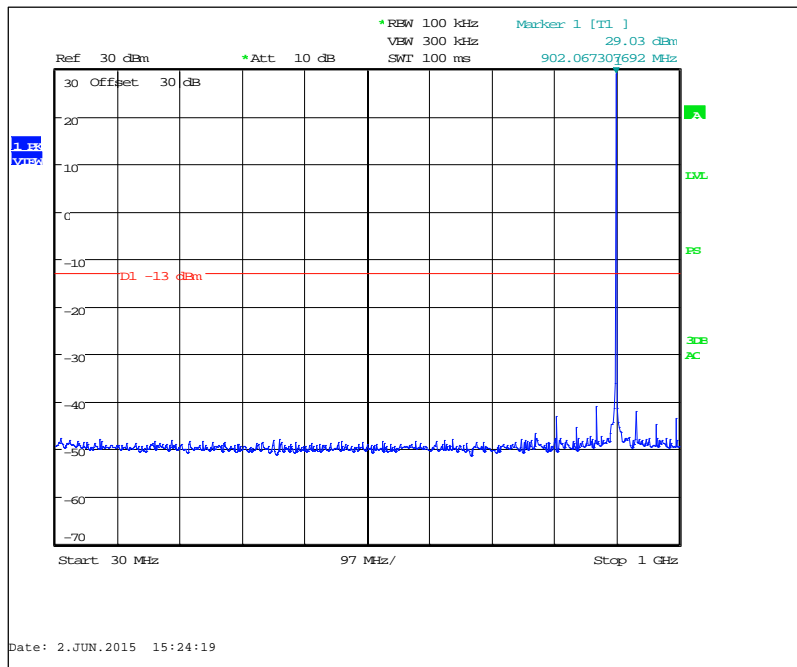


Figure 7.3.2-13: 901.5 MHz – 30MHz to 1GHz (Taitien TCXO)

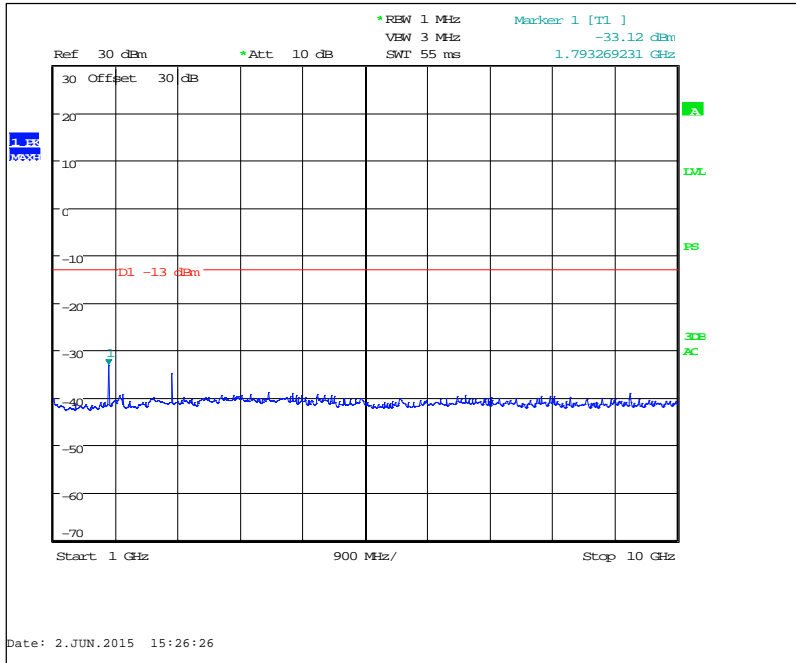


Figure 7.3.2-14: 901.5 MHz – 1GHz to 10GHz (Taitien TCXO)

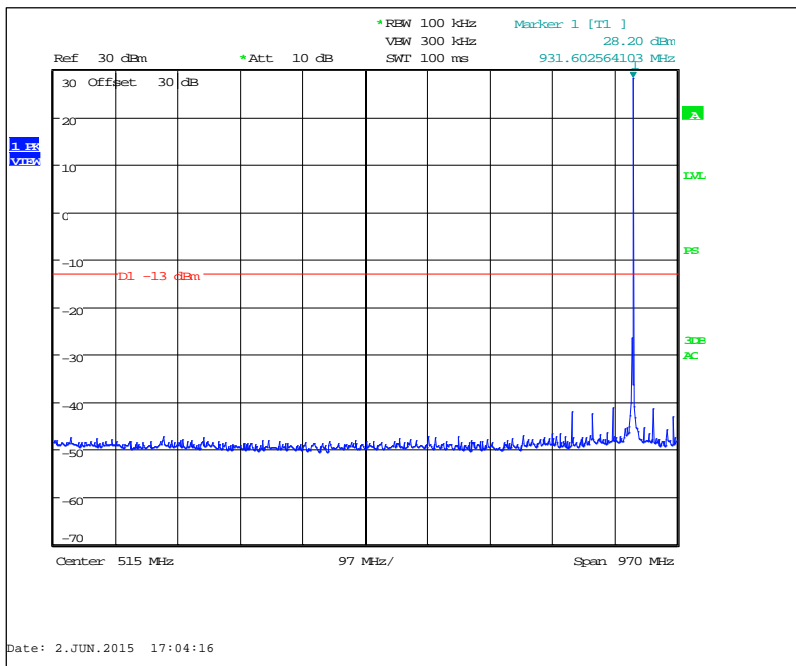


Figure 7.3.2-15: 930.5 MHz – 30MHz to 1GHz (Taitien TCXO)

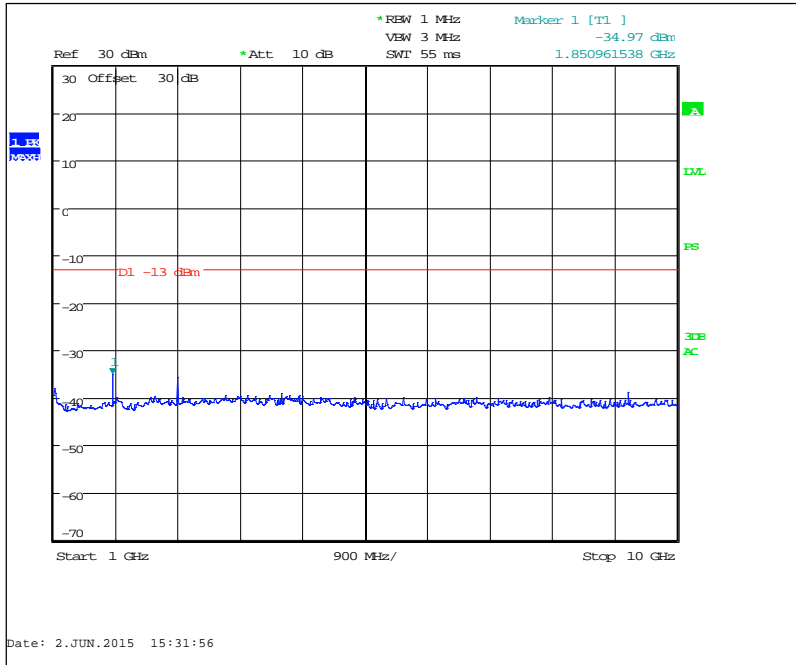


Figure 7.3.2-16: 930.5 MHz – 1GHz to 10GHz (Taitien TCXO)

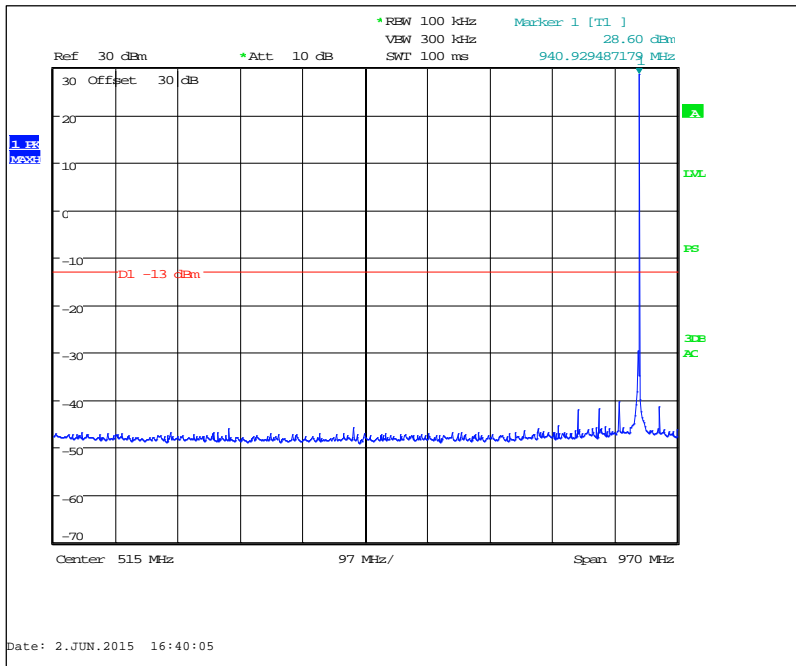


Figure 7.3.2-17: 940.0125 MHz – 30MHz to 1GHz (Taitien TCXO)

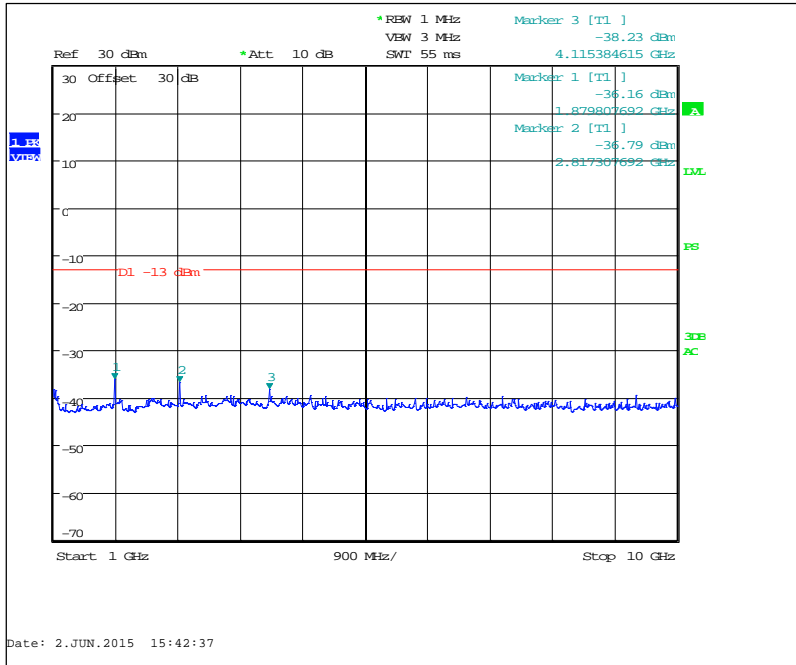


Figure 7.3.2-18: 940.0125 MHz – 1GHz to 10GHz (Taitien TCXO)

Part 101.111 a(6), RSS-119 5.8.6

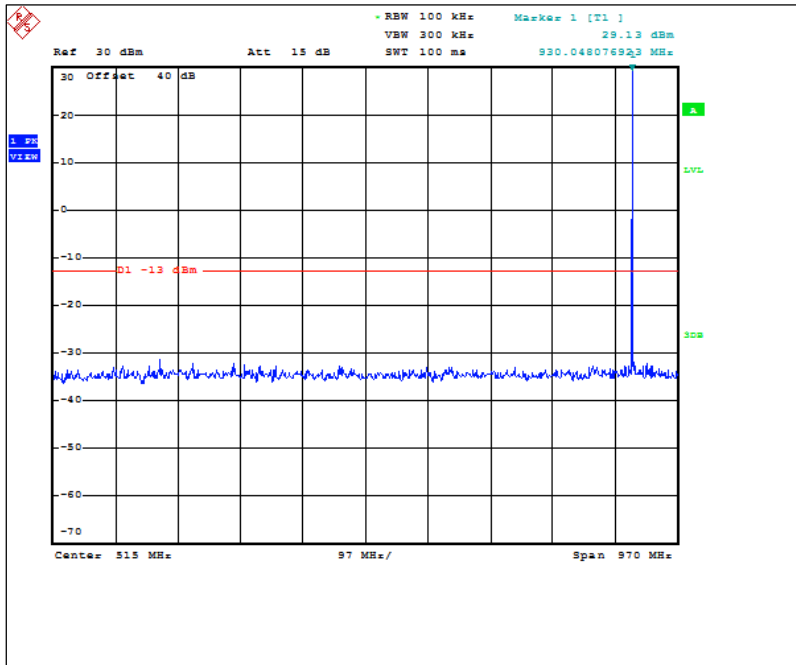


Figure 7.3.2-19: 928.925 MHz – 30MHz to 1GHz (ILSI TCXO)

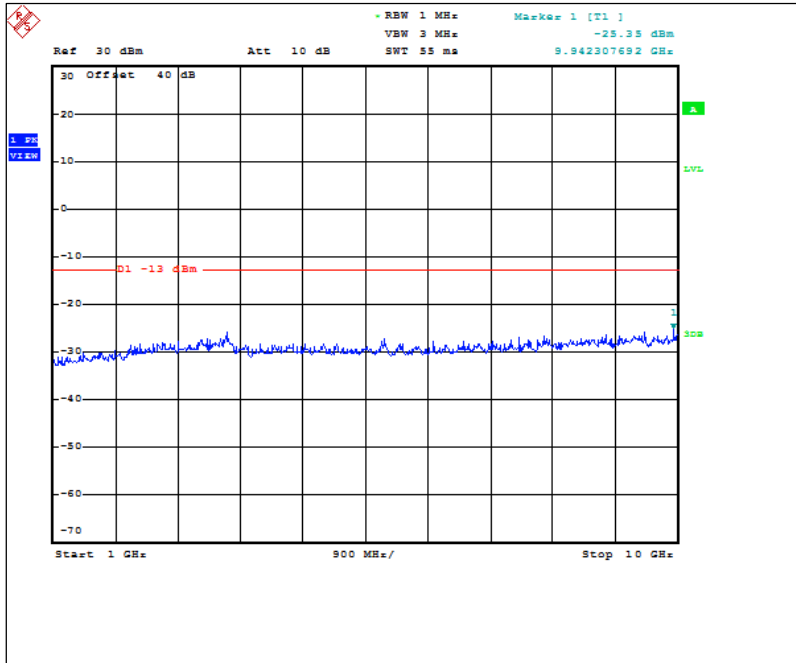


Figure 7.3.2-20: 928.925 MHz – 1GHz to 10GHz (ILSI TCXO)

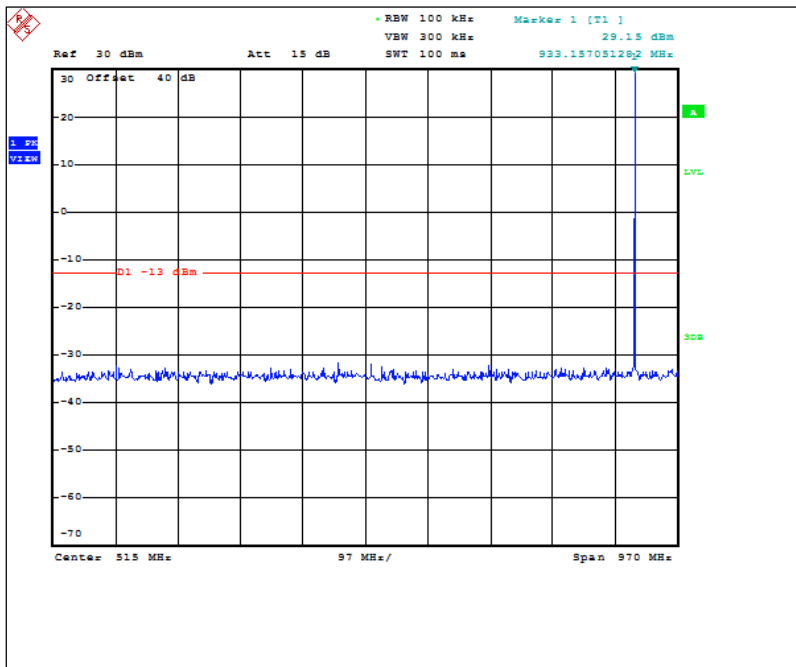


Figure 7.3.2-21: 932.25 MHz – 30MHz to 1GHz (ILSI TCXO)

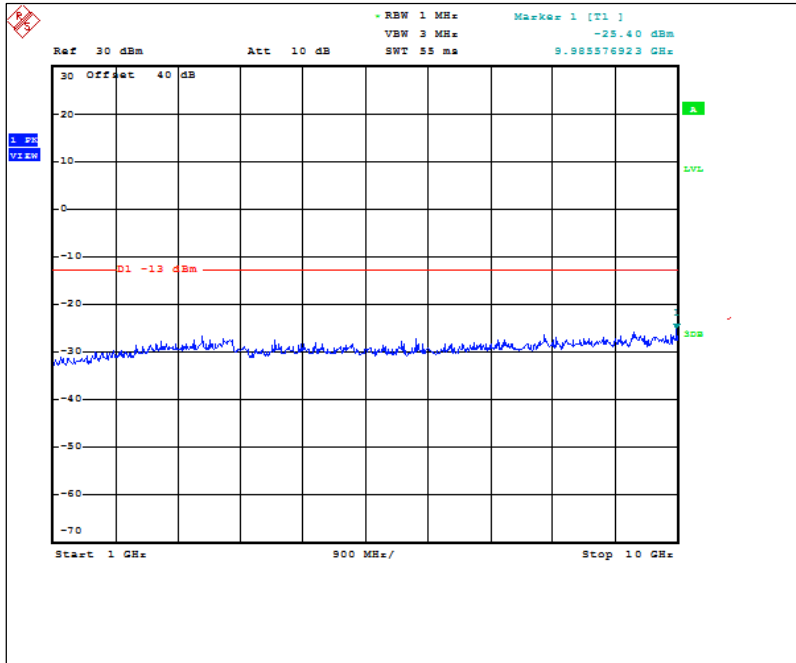


Figure 7.3.2-22: 932.25 MHz – 1GHz to 10GHz (ILSI TCXO)

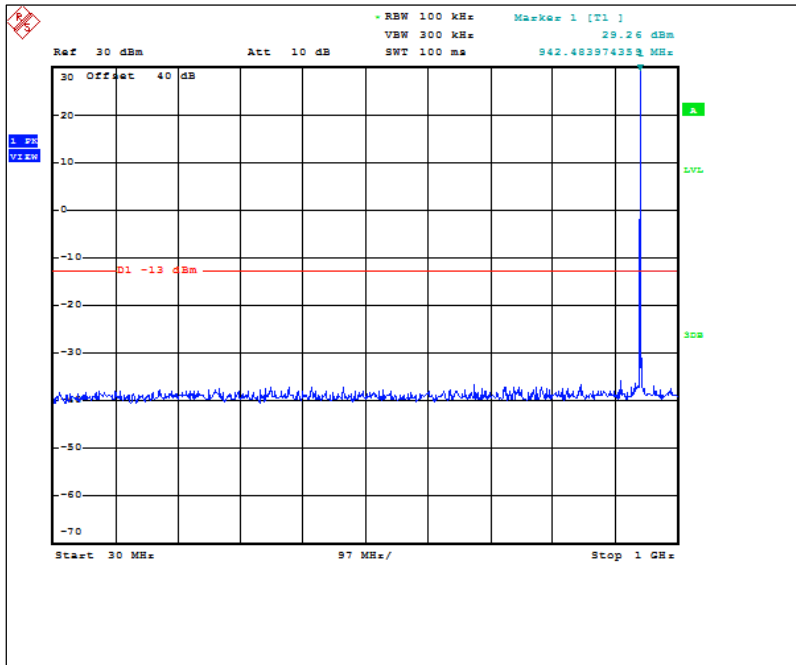


Figure 7.3.2-23: 941.4875 MHz – 30MHz to 1GHz (ILSI TCXO)

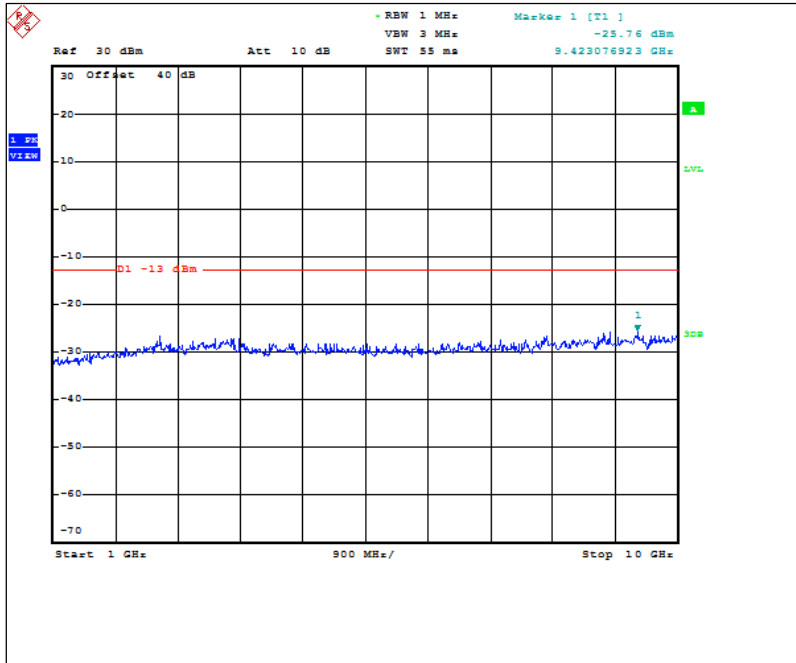


Figure 7.3.2-24: 941.4875 MHz – 1GHz to 10GHz (ILSI TCXO)

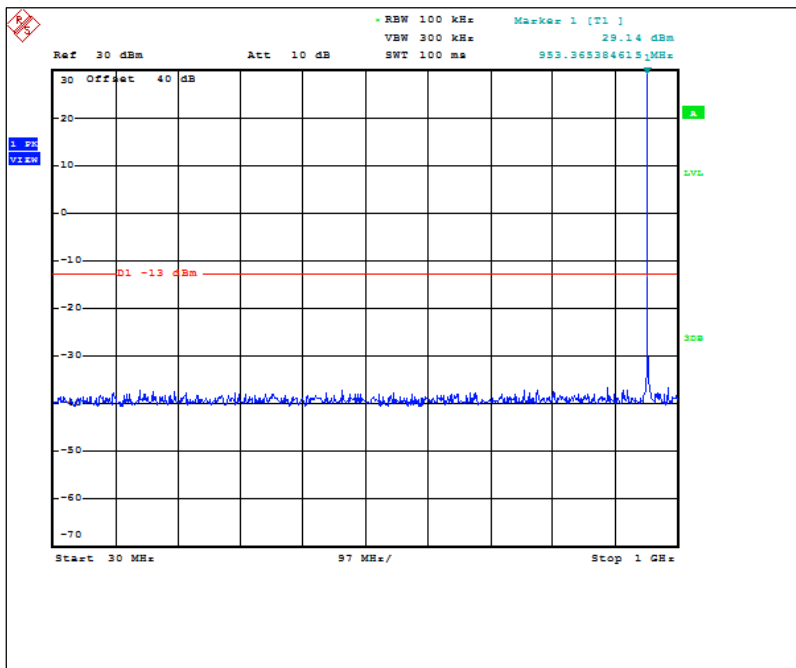


Figure 7.3.2-25: 952.5 MHz – 30MHz to 1GHz (ILSI TCXO)

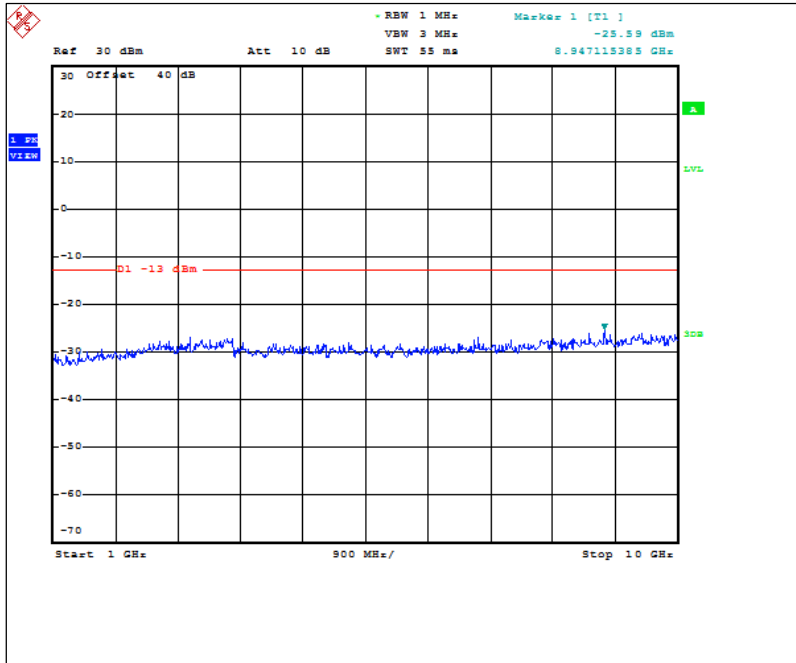


Figure 7.3.2-26: 952.5 MHz – 1GHz to 10GHz (ILSI TCXO)

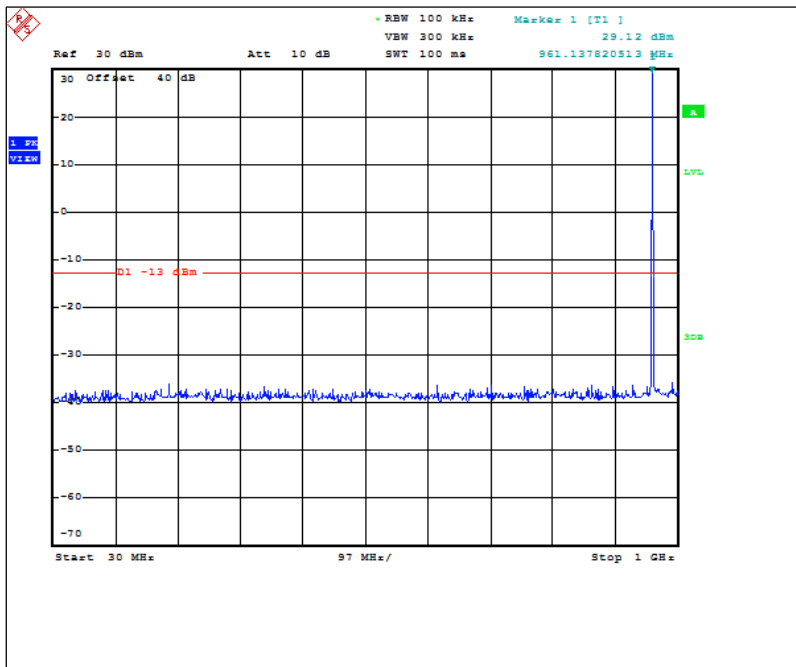


Figure 7.3.2-27: 959.925 MHz – 30MHz to 1GHz (ILSI TCXO)

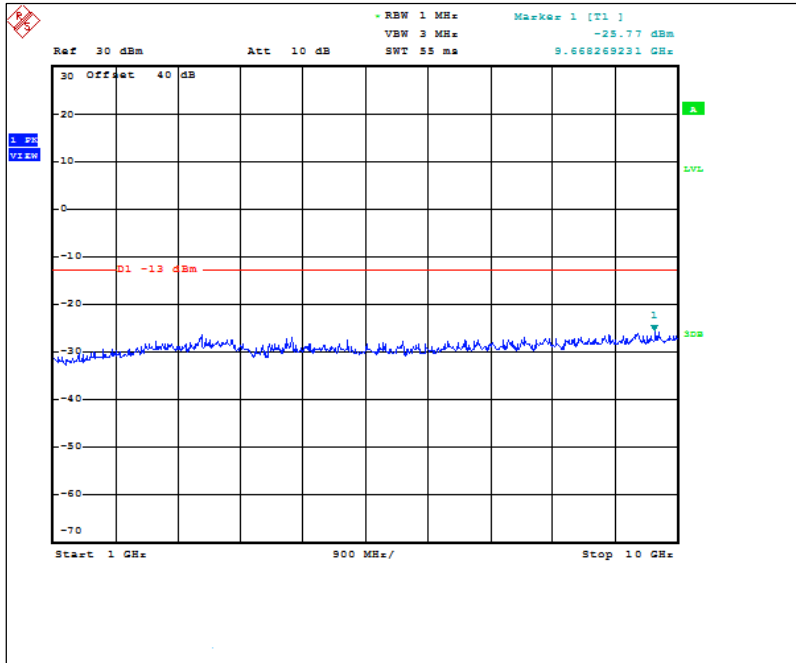


Figure 7.3.2-28: 959.925 MHz – 1GHz to 10GHz (ILSI TCXO)

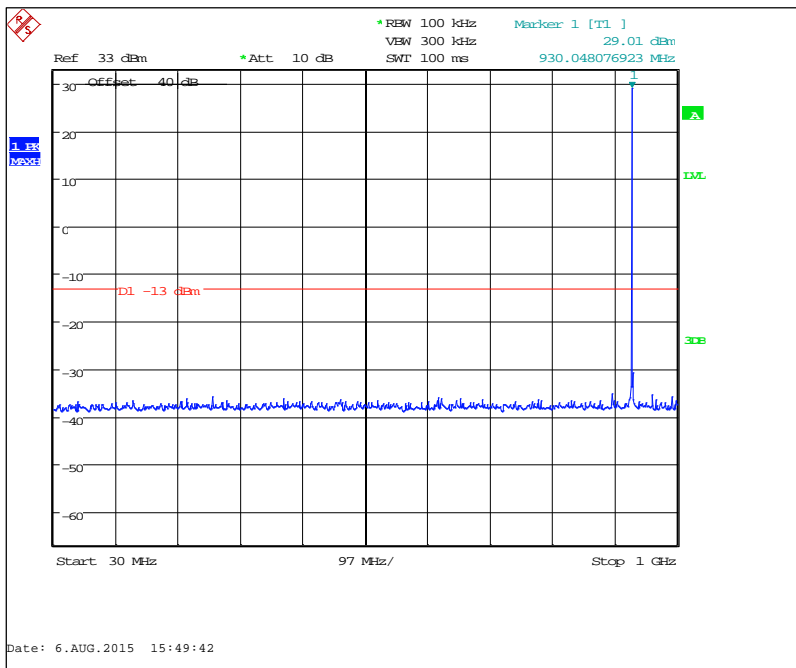


Figure 7.3.2-29: 928.925 MHz – 30MHz to 1GHz (KDS TCXO)

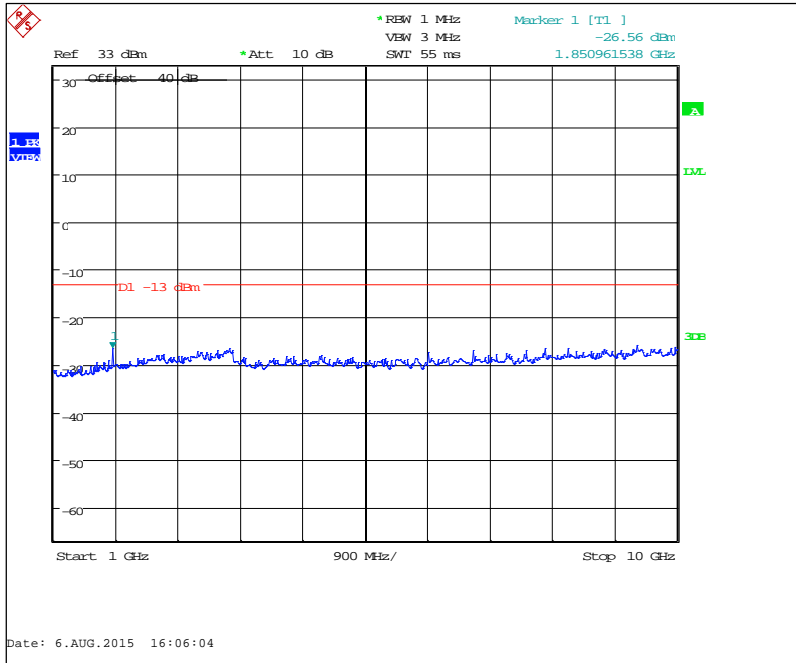


Figure 7.3.2-30: 928.925 MHz – 1GHz to 10GHz (KDS TCXO)

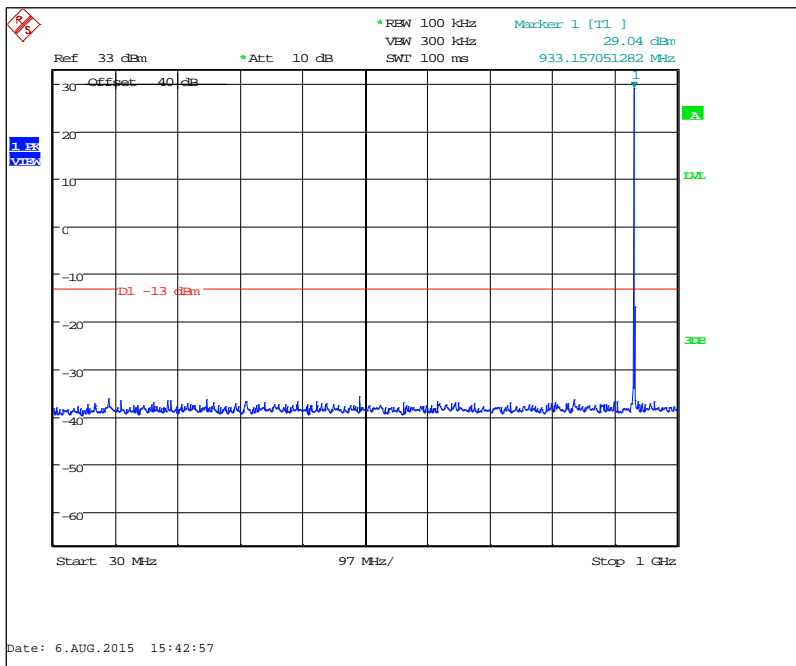


Figure 7.3.2-31: 932.25 MHz – 30MHz to 1GHz (KDS TCXO)

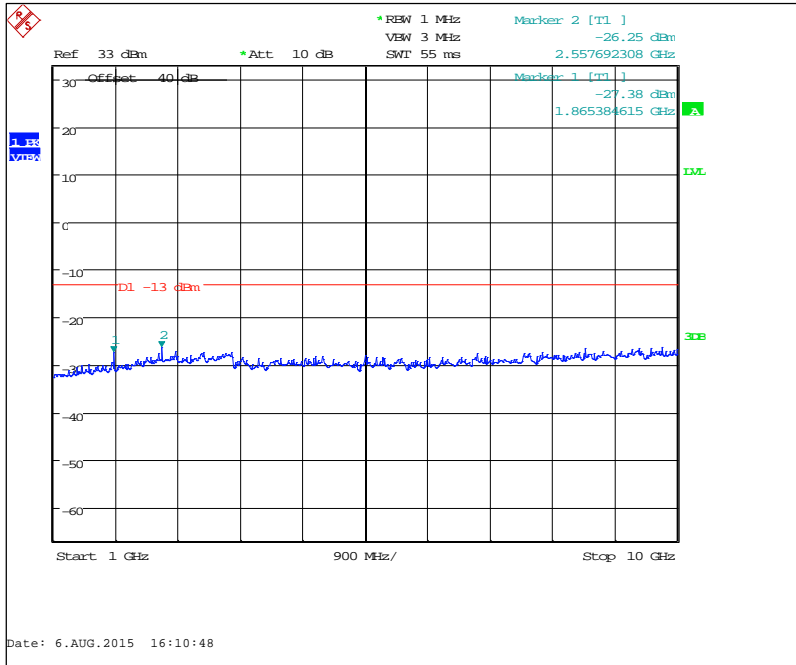


Figure 7.3.2-32: 932.25 MHz – 1GHz to 10GHz (KDS TCXO)

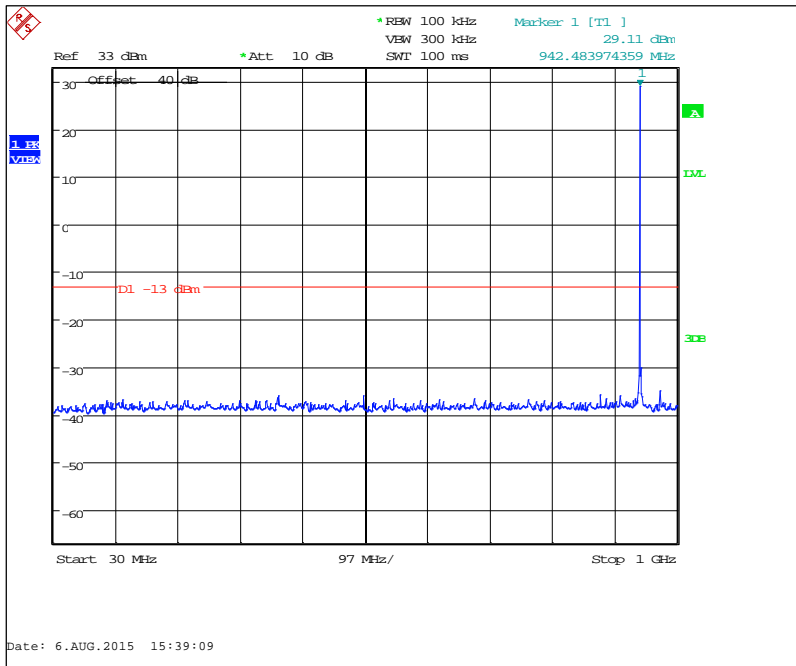


Figure 7.3.2-33: 941.4875 MHz – 30MHz to 1GHz (KDS TCXO)

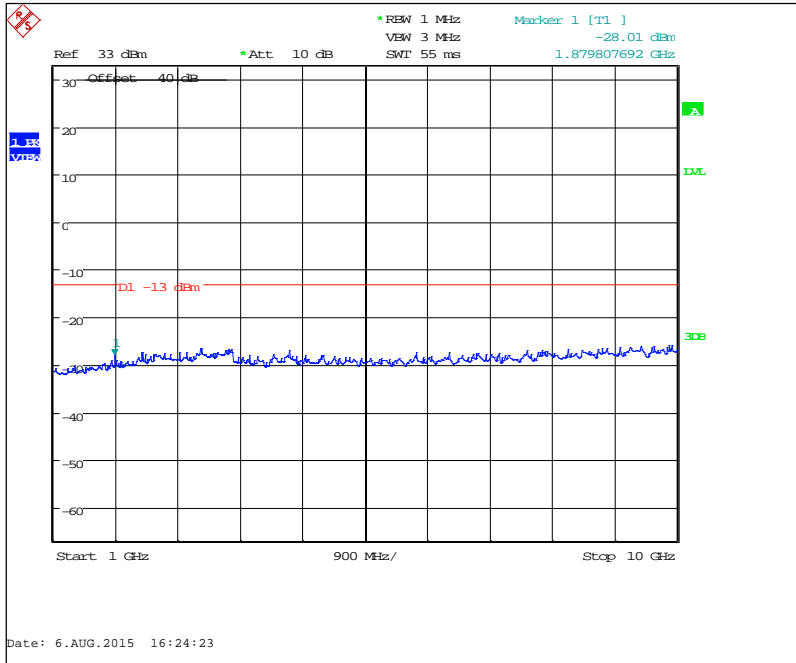


Figure 7.3.2-34: 941.4875 MHz – 1GHz to 10GHz (KDS TCXO)

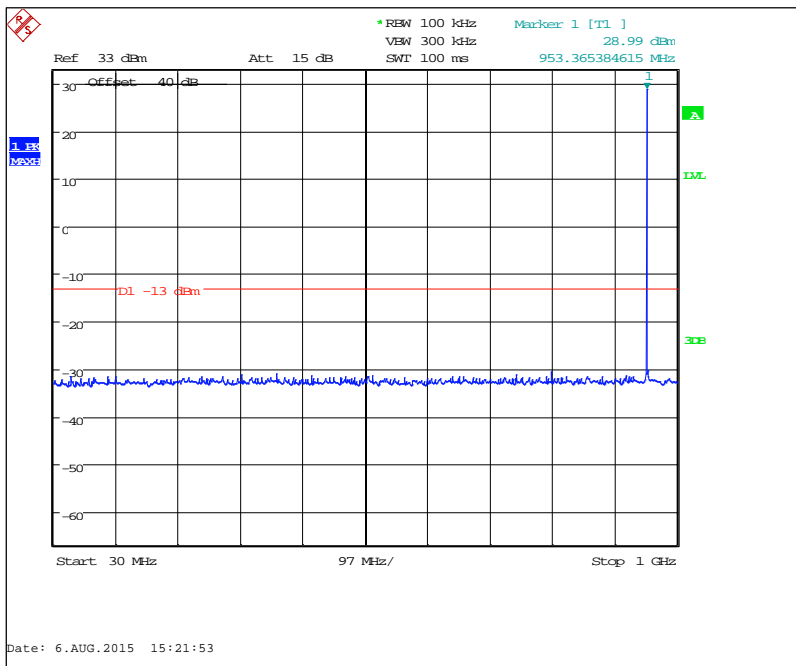
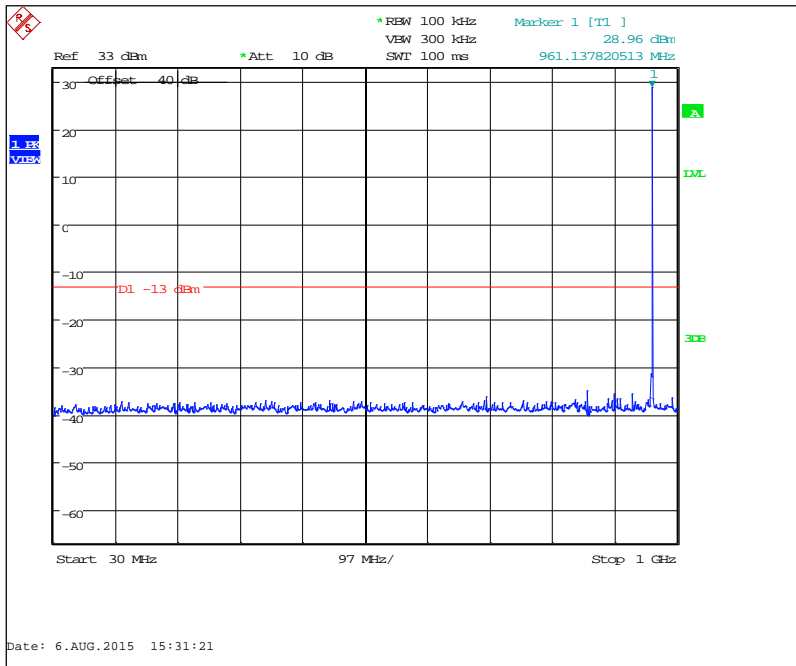
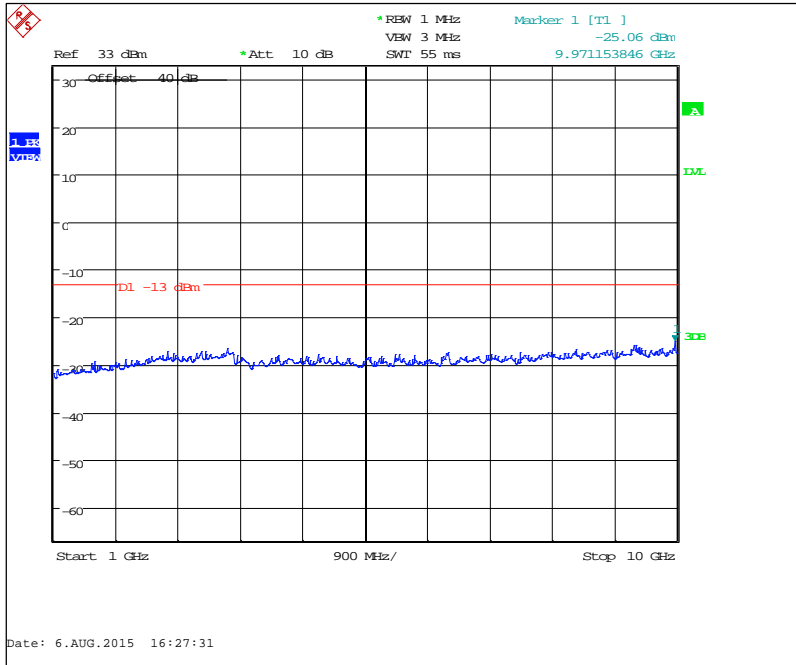


Figure 7.3.2-35 952.5 MHz – 30MHz to 1GHz (KDS TCXO)



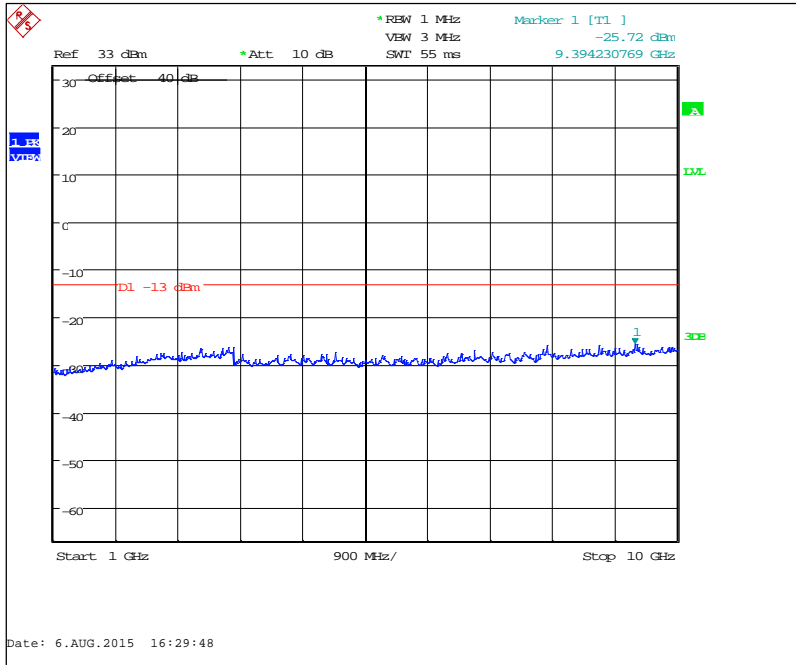


Figure 7.3.2-38: 959.925 MHz – 1GHz to 10GHz (KDS TCXO)

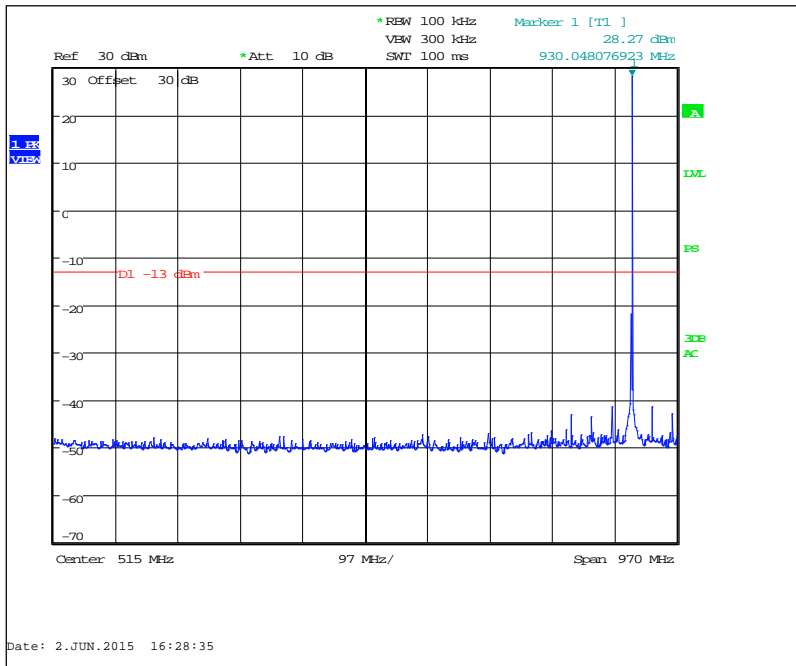


Figure 7.3.2-39: 928.925 MHz – 30MHz to 1GHz (Taitien TCXO)

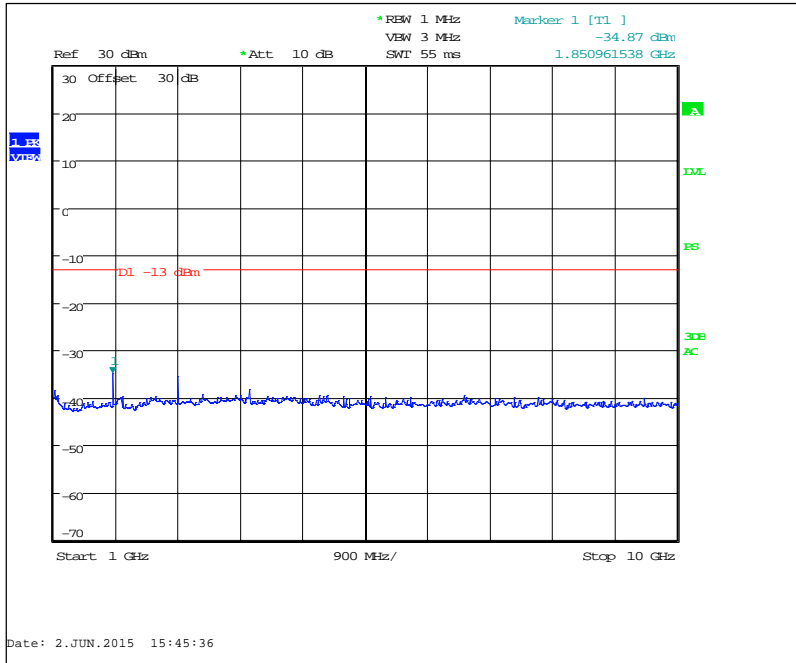


Figure 7.3.2-40: 928.925 MHz – 1GHz to 10GHz (Taitien TCXO)

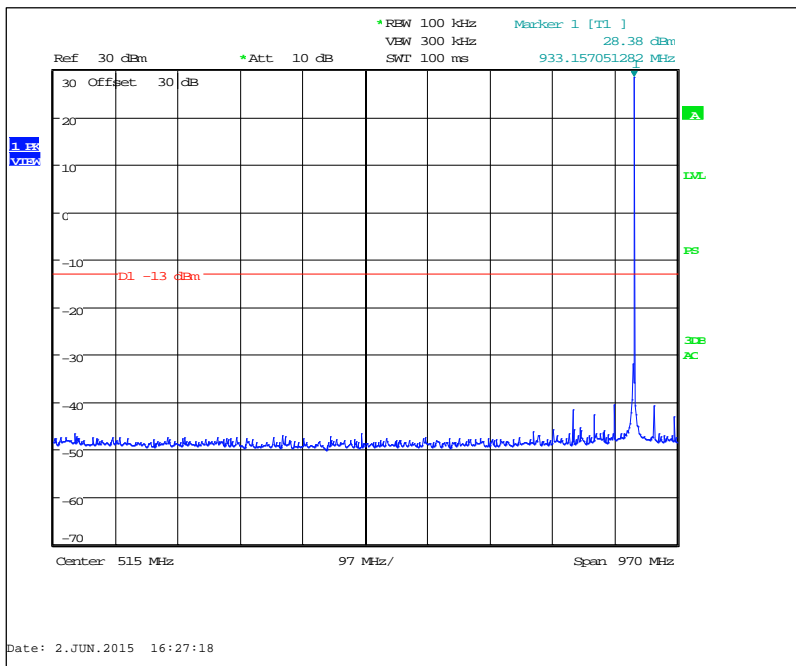


Figure 7.3.2-41: 932.25 MHz – 30MHz to 1GHz (Taitien TCXO)

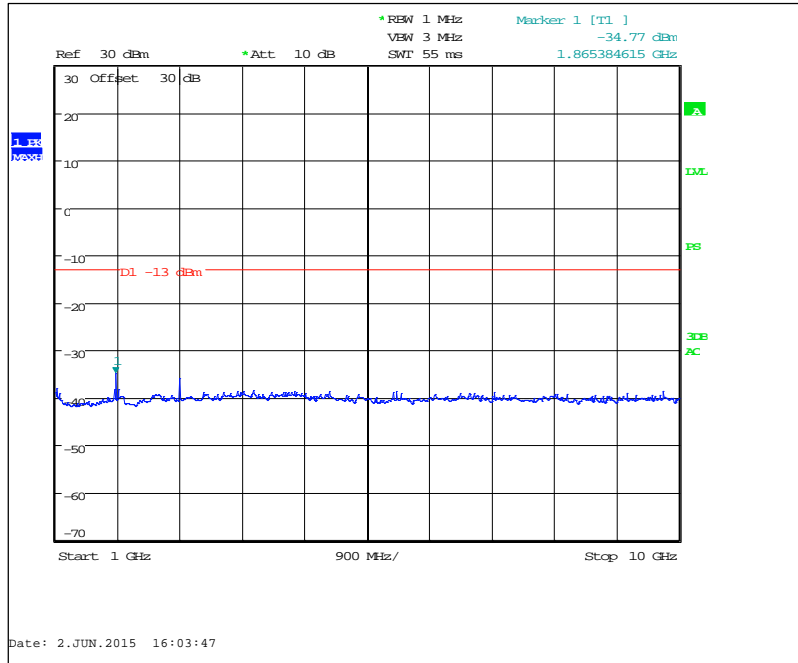


Figure 7.3.2-42: 932.25 MHz – 1GHz to 10GHz (Taitien TCXO)

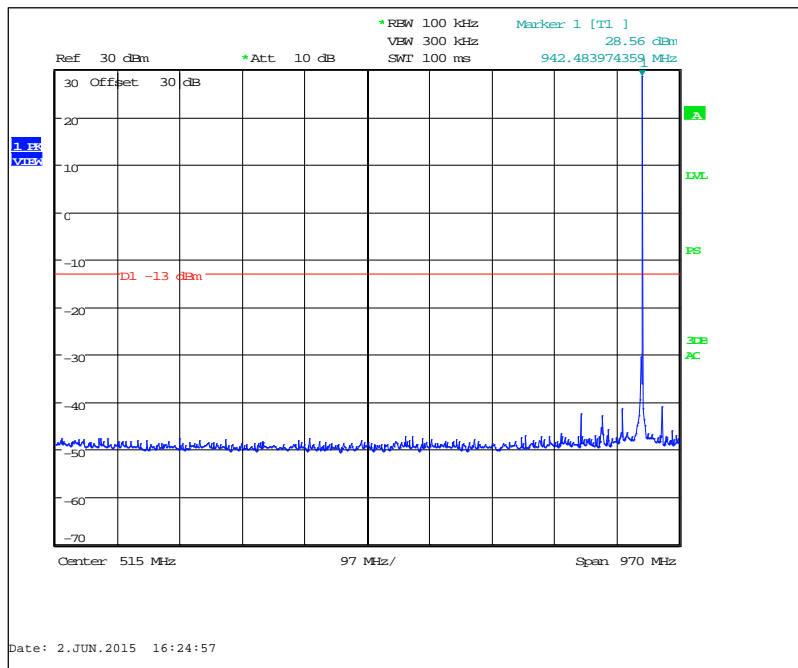


Figure 7.3.2-43: 941.4875 MHz – 30MHz to 1GHz (Taitien TCXO)

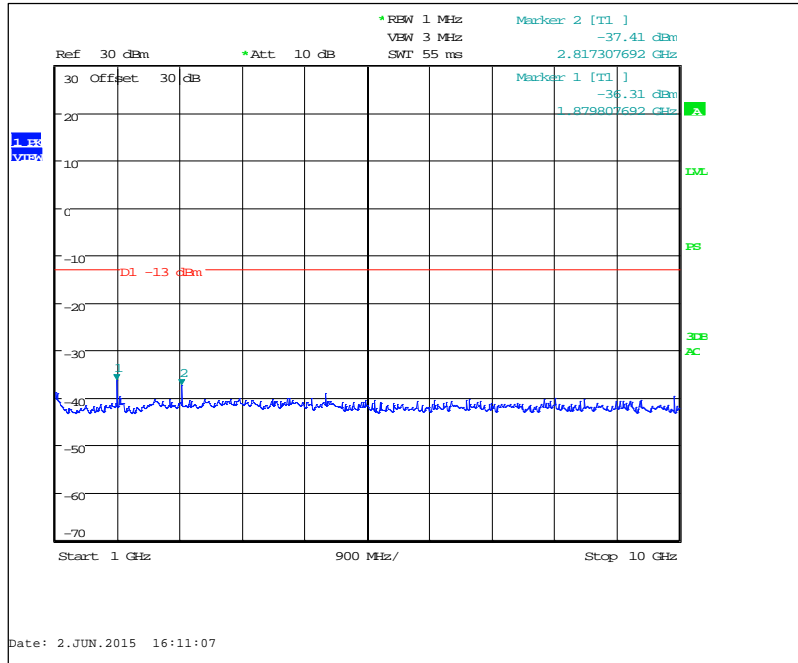


Figure 7.3.2-44: 941.4875 MHz – 1GHz to 10GHz (Taitien TCXO)

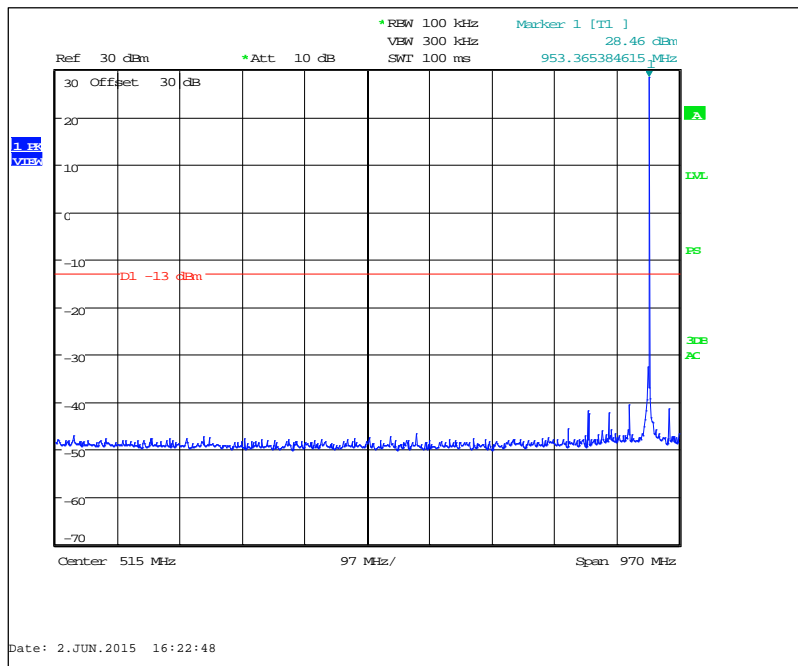


Figure 7.3.2-45 952.5 MHz – 30MHz to 1GHz (Taitien TCXO)

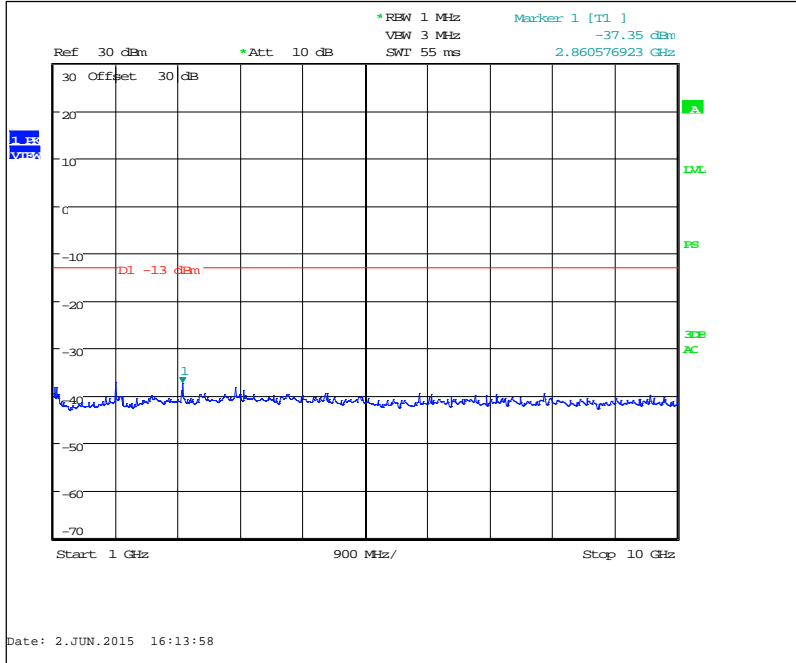


Figure 7.3.2-46: 952.5 MHz – 1GHz to 10GHz (Taitien TCXO)

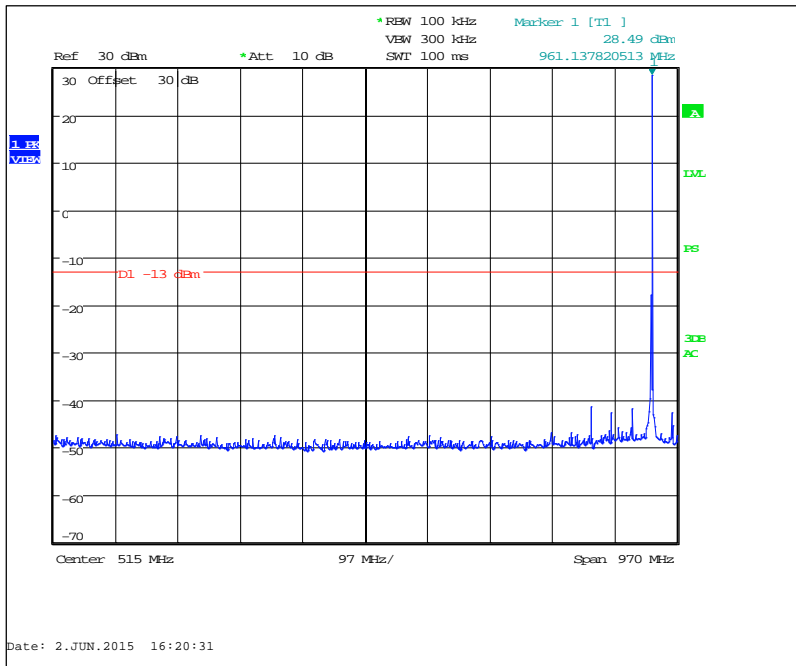


Figure 7.3.2-47: 959.925 MHz – 30MHz to 1GHz (Taitien TCXO)

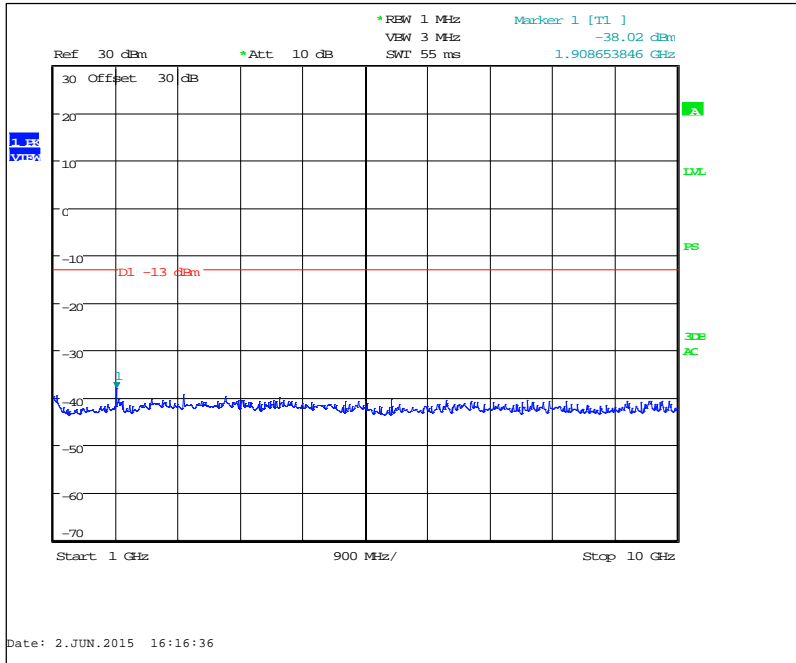


Figure 7.3.2-48: 959.925 MHz – 1GHz to 10GHz (Taitien TCXO)

7.4 Field Strength of Spurious Emissions

7.4.1 Measurement Procedure

The equipment under test is placed in the Semi-Anechoic Chamber (described in section 2.3.1) on a table at the turntable center. For each spurious emission, the antenna mast is raised and lowered from one (1) to four (4) meters and the turntable is rotated 360° and the maximum reading on the spectrum analyzer is recorded. This was repeated for both horizontal and vertical polarizations of the receive antenna.

The equipment under test is then replaced with a substitution antenna fed by a signal generator. The signal generator's frequency is set to that of the spurious emission recorded from the equipment under test. The antenna mast is raised and lowered from one (1) to four (4) meters to obtain a maximum reading on the spectrum analyzer. The output of the signal generator is then adjusted until the reading on the spectrum analyzer matches that obtained from the equipment under test. The signal generator level is recorded. The power in dBm of each spurious emission is calculated by correcting the signal generator level for the cable loss and gain of the substitution antenna referenced to a dipole. The spectrum was investigated in accordance to CFR 47 Part 2.1057.

The magnitude of all spurious emissions not reported were attenuated below the noise floor of the measurement system and therefore not specified in this report.

The Taiten, KDS, and ILSI variants of TCXOs were tested and the worst case is the ILSI serial # 120000333. The data below represents that of the SGW100 with the ILSI TCXO.

7.4.2 Measurement Results

Part 24.133 a(1), a(2), RSS-134 6.3(i), (ii)

Table 7.4.2-1: Field Strength of Spurious Emissions –901.5 MHz –Normal Mode

Frequency (MHz)	Spectrum Analyzer Level (dB μ V/m)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1803	58.60	H	-43.40	-13.00	30.40
1803	60.70	V	-39.10	-13.00	26.10
2704.5	65.30	H	-34.30	-13.00	21.30
2704.5	68.10	V	-30.60	-13.00	17.60

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Table 7.4.2-2: Field Strength of Spurious Emissions –930.5 MHz – mPass 5k Mode

Frequency (MHz)	Spectrum Analyzer Level (dB μ V/m)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1861	53.80	H	-48.38	-13.00	35.38
1861	53.50	V	-47.38	-13.00	34.38
2791.5	58.10	H	-42.05	-13.00	29.05
2791.5	58.90	V	-40.25	-13.00	27.25

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Table 7.4.2-3: Field Strength of Spurious Emissions –940.0125 MHz – mPass 5k Mode

Frequency (MHz)	Spectrum Analyzer Level (dB μ V/m)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1880.025	54.10	H	-48.18	-13.00	35.18
1880.025	52.80	V	-47.98	-13.00	34.98
2820.0375	55.40	H	-45.14	-13.00	32.14
2820.0375	57.50	V	-41.64	-13.00	28.64

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Part 101.111 a(6), RSS-119 5.8.6

Table 7.4.2-4: Field Strength of Spurious Emissions –928.925 MHz –Normal Mode

Frequency (MHz)	Spectrum Analyzer Level (dB μ V/m)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1857.85	54.50	H	-47.49	-13.00	34.49
1857.85	51	V	-50.29	-13.00	37.29
2786.775	58.9	H	-41.46	-13.00	28.46
2786.775	60.8	V	-38.36	-13.00	25.36

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Table 7.4.2-5: Field Strength of Spurious Emissions – 932.25 MHz –Normal Mode

Frequency (MHz)	Spectrum Analyzer Level (dB μ V/m)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1864.5	53.50	H	-48.18	-13.00	35.18
1864.5	50.60	V	-49.98	-13.00	36.98
2796.75	57.10	H	-43.05	-13.00	30.05
2796.75	59.80	V	-39.45	-13.00	26.45

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Table 7.4.2-6: Field Strength of Spurious Emissions –941.4875 MHz – mPass 5k Mode

Frequency (MHz)	Spectrum Analyzer Level (dB μ V/m)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1883	55.40	H	-46.48	-13.00	33.48
1883	55.10	V	-44.68	-13.00	31.68
2824.5	54.70	H	-45.73	-13.00	32.73
2824.5	58.20	V	-40.53	-13.00	27.53

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Table 7.4.2-7: Field Strength of Spurious Emissions –952.5 MHz – mPass 5k Mode

Frequency (MHz)	Spectrum Analyzer Level (dB μ V/m)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1905	56.00	H	-45.18	-13.00	32.18
1905	56.30	V	-43.08	-13.00	30.08
2857.5	55.90	H	-44.22	-13.00	31.22
2857.5	56.90	V	-41.82	-13.00	28.82

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Table 7.4.2-8: Field Strength of Spurious Emissions –959.925 MHz – mPass 5k Mode

Frequency (MHz)	Spectrum Analyzer Level (dB μ V/m)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1919.8	57.60	H	-43.87	-13.00	30.87
1919.8	55.30	V	-44.27	-13.00	31.27
2879.7	55.00	H	-44.90	-13.00	31.90
2879.7	55.90	V	-42.80	-13.00	29.80

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

7.5 Frequency Stability

7.5.1 Measurement Procedure

The equipment under test is placed inside an environmental chamber. The RF output is directly coupled through appropriate attenuation to the input of the measurement equipment. A power supply is attached to the primary supply voltage.

Frequency measurements were made at intervals of 10° C over the temperature range of -30° C to +50° C at the normal supply voltage. A period of time sufficient to stabilize all components of the equipment was allowed at each temperature step. The equipment operates at 3.6 Vdc. At 20°C two additional measurements were performed at +/- 15% of 3.6Vdc. The maximum variation of frequency over temperature and voltage was recorded.

The results of the test are shown below:

7.5.2 Measurement Results

Part 24.135, RSS-134 (7)

Frequency Stability

Frequency (MHz): 901.5
 Deviation Limit (PPM): 1.0ppm

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	901.499373	-0.696	100%	3.60
-20 C	901.499365	-0.704	100%	3.60
-10 C	901.499355	-0.715	100%	3.60
0 C	901.499460	-0.599	100%	3.60
10 C	901.499670	-0.366	100%	3.60
20 C	901.499743	-0.285	100%	3.60
30 C	901.499745	-0.283	100%	3.60
40 C	901.499815	-0.205	100%	3.60
50 C	901.499905	-0.105	100%	3.60
20 C	901.499743	-0.285	85%	3.06
20 C	901.499732	-0.297	100%	4.14

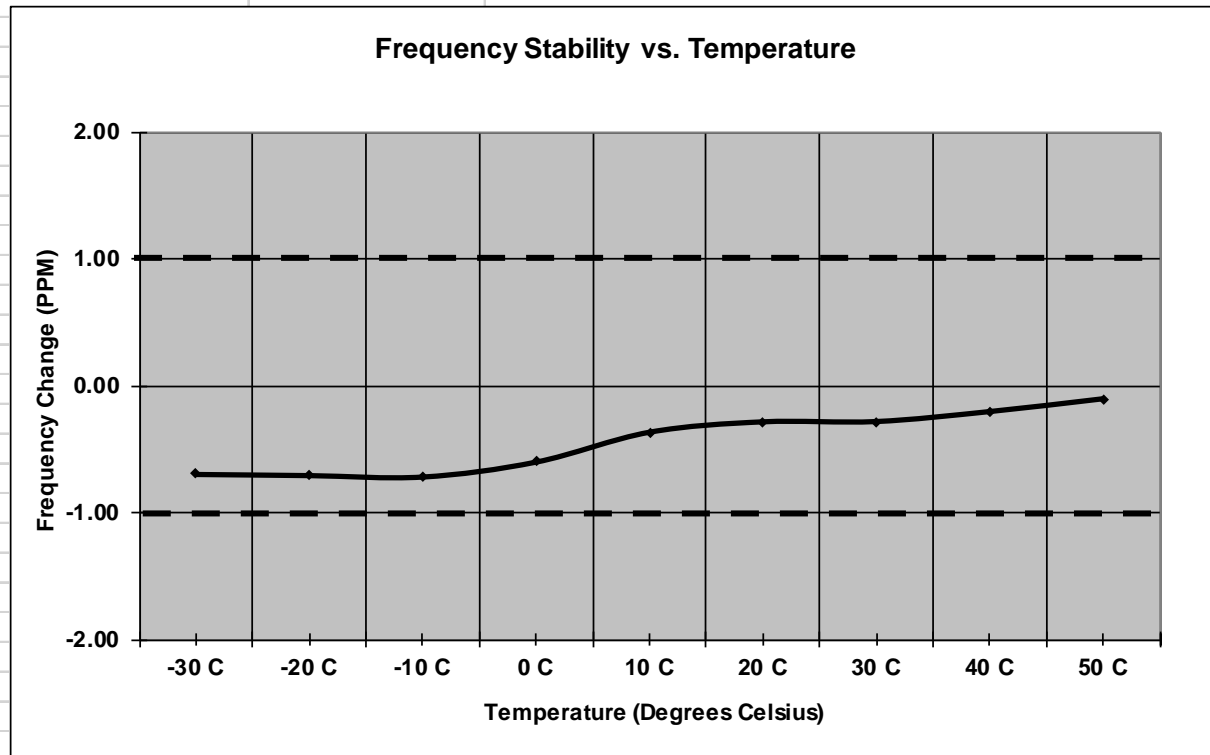


Figure 7.5.2-1: Frequency Stability –901.5 MHz – KDS

Frequency Stability

Frequency (MHz): 901.5

Deviation Limit (PPM): 1.0ppm

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	901.499420	-0.643	100%	3.60
-20 C	901.499667	-0.369	100%	3.60
-10 C	901.499749	-0.278	100%	3.60
0 C	901.499772	-0.253	100%	3.60
10 C	901.499792	-0.231	100%	3.60
20 C	901.499807	-0.214	100%	3.60
30 C	901.499801	-0.221	100%	3.60
40 C	901.499781	-0.243	100%	3.60
50 C	901.499739	-0.290	100%	3.60
20 C	901.499809	-0.212	85%	3.06
20 C	901.499809	-0.212	100%	4.14

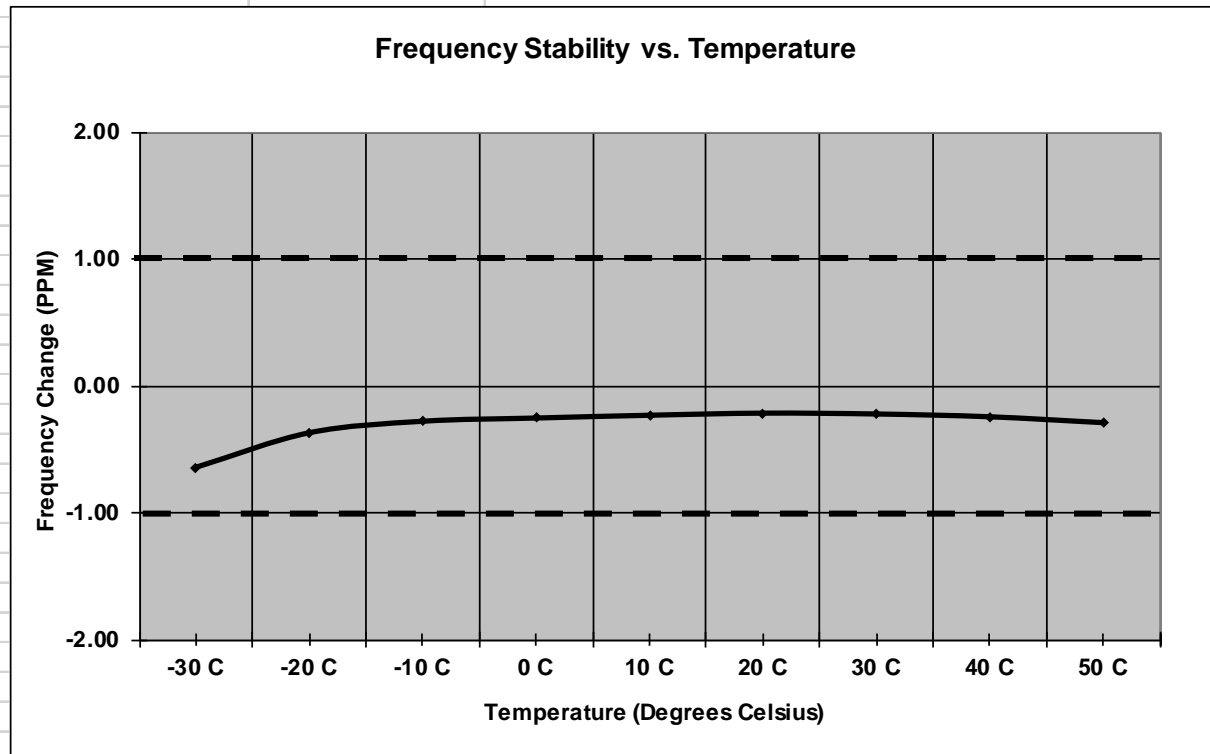


Figure 7.5.2-2: Frequency Stability –901.5 MHz – ILSI

Frequency Stability

Frequency (MHz): 901.5

Deviation Limit (PPM): 1.0ppm

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	901.500271	0.301	100%	3.60
-20 C	901.500246	0.273	100%	3.60
-10 C	901.500013	0.014	100%	3.60
0 C	901.499776	-0.248	100%	3.60
10 C	901.499844	-0.173	100%	3.60
20 C	901.500058	0.064	100%	3.60
30 C	901.500218	0.242	100%	3.60
40 C	901.500246	0.273	100%	3.60
50 C	901.500242	0.268	100%	3.60
20 C	901.499930	-0.078	85%	3.06
20 C	901.499974	-0.029	100%	4.14

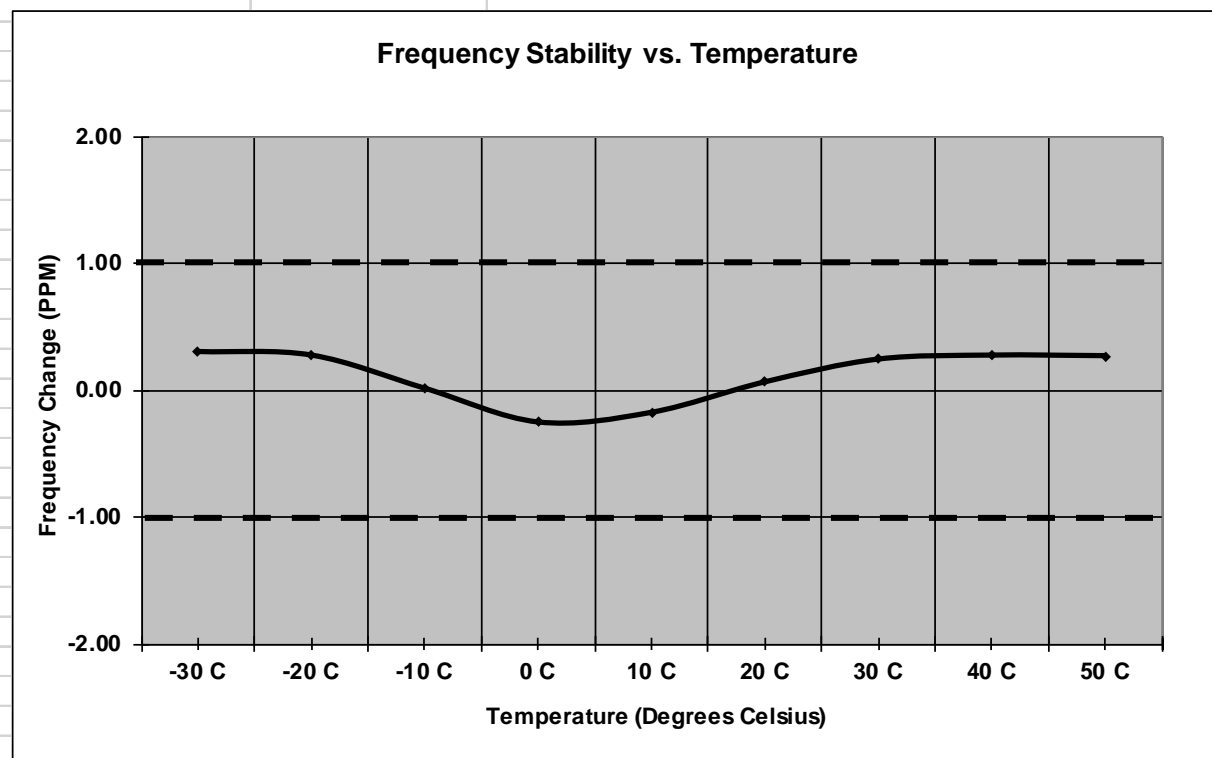


Figure 7.5.2-3: Frequency Stability –901.5 MHz - Taitien

Part 24.135, RSS-134 (7)

Frequency Stability

Frequency (MHz): 930.5

Deviation Limit (PPM): 1.0ppm

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	930.499374	-0.673	100%	3.60
-20 C	930.499325	-0.725	100%	3.60
-10 C	930.499344	-0.705	100%	3.60
0 C	930.499508	-0.529	100%	3.60
10 C	930.499660	-0.365	100%	3.60
20 C	930.499682	-0.342	100%	3.60
30 C	930.499721	-0.300	100%	3.60
40 C	930.499798	-0.217	100%	3.60
50 C	930.499895	-0.113	100%	3.60
20 C	930.499703	-0.319	85%	3.06
20 C	930.499675	-0.349	100%	4.14

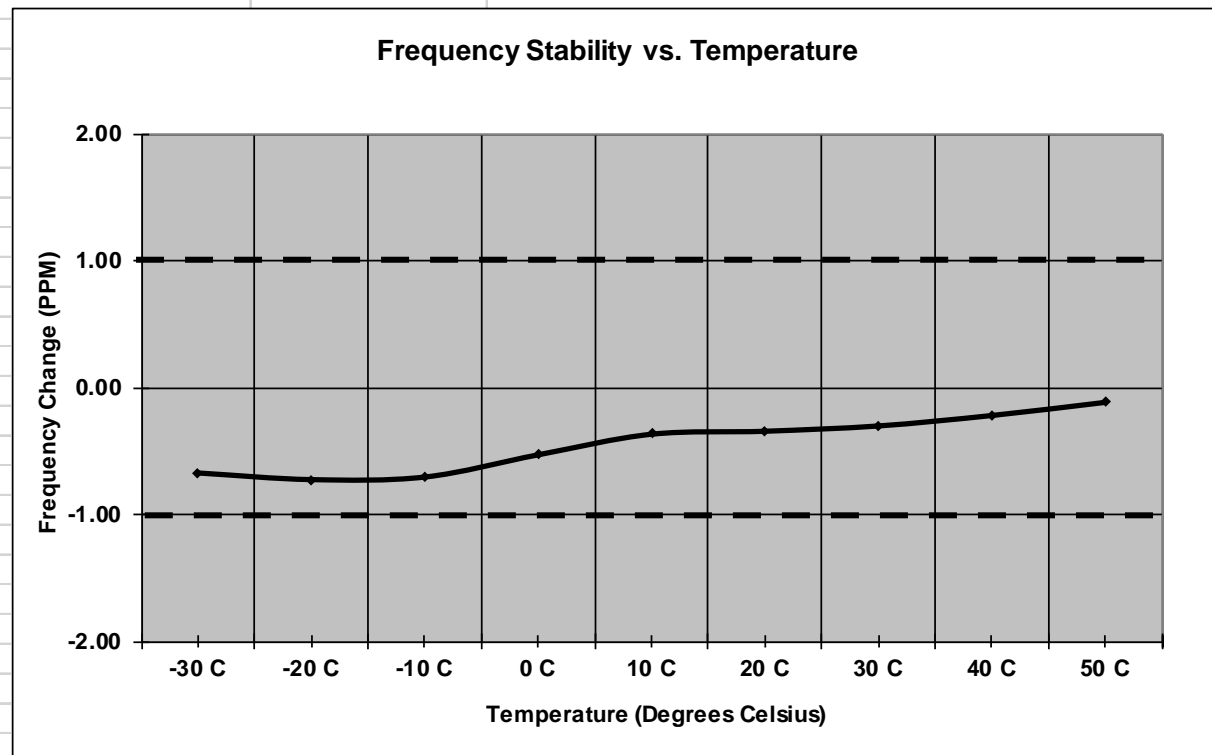


Figure 7.5.2-4: Frequency Stability –930.5 MHz – KDS

Frequency Stability

Frequency (MHz): 930.5

Deviation Limit (PPM): 1.0ppm

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	930.499391	-0.654	100%	3.60
-20 C	930.499661	-0.364	100%	3.60
-10 C	930.499738	-0.282	100%	3.60
0 C	930.499766	-0.251	100%	3.60
10 C	930.499824	-0.189	100%	3.60
20 C	930.499819	-0.195	100%	3.60
30 C	930.499802	-0.213	100%	3.60
40 C	930.499787	-0.229	100%	3.60
50 C	930.499774	-0.243	100%	3.60
20 C	930.499820	-0.193	85%	3.06
20 C	930.499818	-0.196	100%	4.14

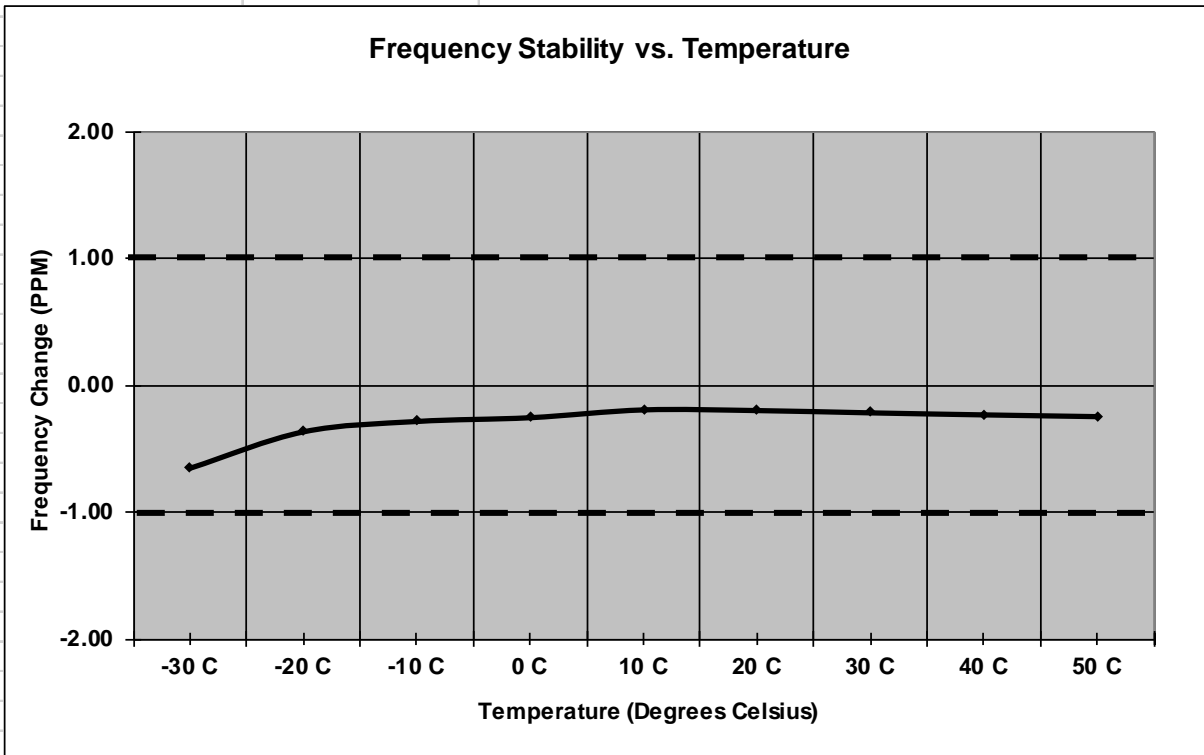


Figure 7.5.2-5: Frequency Stability –930.5 MHz – ILSI

Frequency Stability

Frequency (MHz): 930.5

Deviation Limit (PPM): 1.0ppm

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	930.500238	0.256	100%	3.60
-20 C	930.500204	0.219	100%	3.60
-10 C	930.500030	0.032	100%	3.60
0 C	930.499736	-0.284	100%	3.60
10 C	930.499804	-0.211	100%	3.60
20 C	930.500001	0.001	100%	3.60
30 C	930.500167	0.179	100%	3.60
40 C	930.500208	0.224	100%	3.60
50 C	930.500200	0.215	100%	3.60
20 C	930.499924	-0.082	85%	3.06
20 C	930.499999	-0.001	100%	4.14

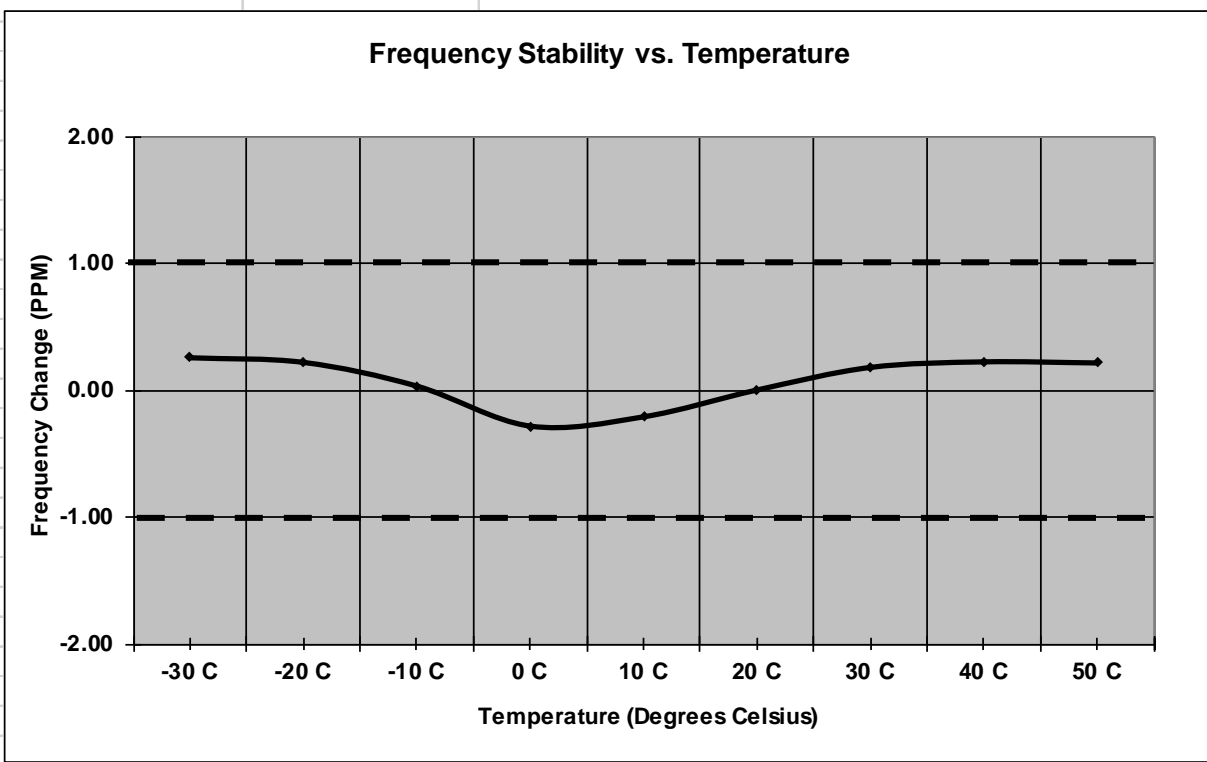


Figure 7.5.2-6: Frequency Stability –930.5 MHz - Taitien

Part 101.107, RSS-119 5.3

Frequency Stability

Frequency (MHz): 959.925

Deviation Limit (PPM): 1.0ppm

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	959.924353	-0.674	100%	3.60
-20 C	959.924357	-0.670	100%	3.60
-10 C	959.924388	-0.638	100%	3.60
0 C	959.924518	-0.502	100%	3.60
10 C	959.924670	-0.344	100%	3.60
20 C	959.924758	-0.252	100%	3.60
30 C	959.924795	-0.214	100%	3.60
40 C	959.924824	-0.183	100%	3.60
50 C	959.924929	-0.074	100%	3.60
20 C	959.924726	-0.285	85%	3.06
20 C	959.924713	-0.299	100%	4.14

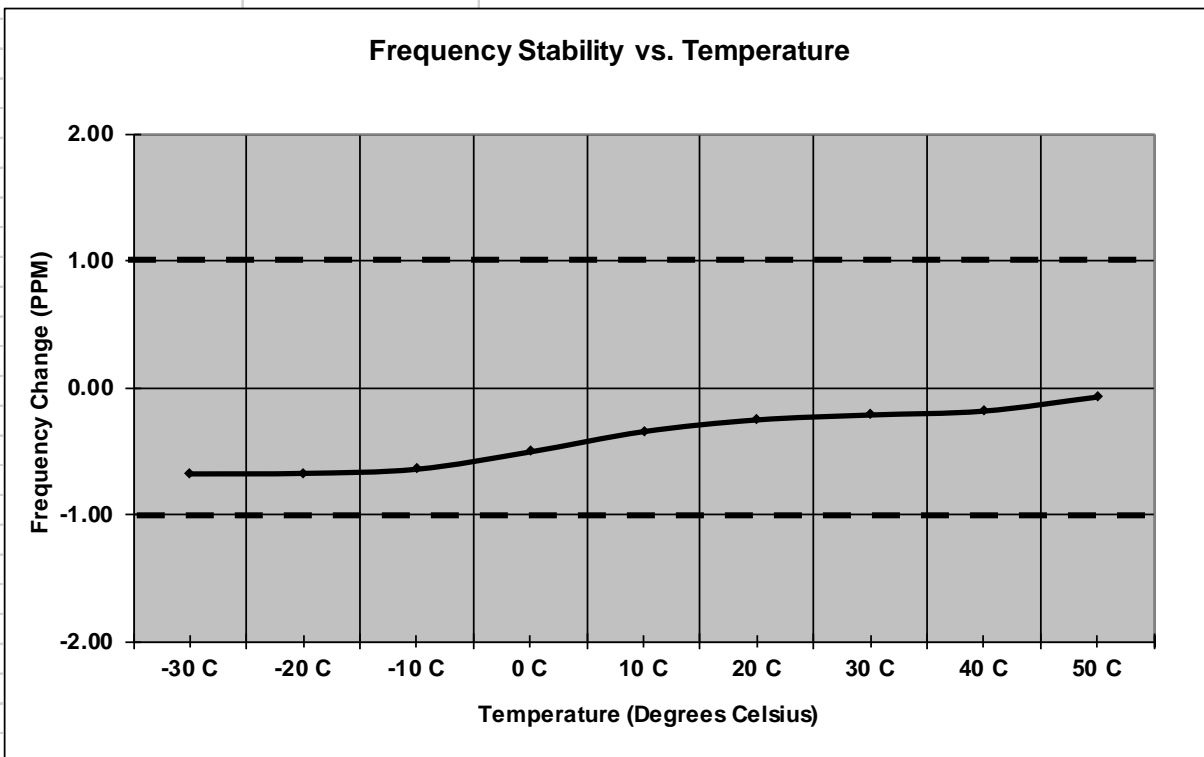


Figure 7.5.2-7: Frequency Stability –959.925 MHz – KDS

Frequency Stability

Frequency (MHz): 959.925

Deviation Limit (PPM): 1.0ppm

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	959.924305	-0.724	100%	3.60
-20 C	959.924591	-0.426	100%	3.60
-10 C	959.924688	-0.325	100%	3.60
0 C	959.924694	-0.319	100%	3.60
10 C	959.924753	-0.257	100%	3.60
20 C	959.924740	-0.271	100%	3.60
30 C	959.924741	-0.270	100%	3.60
40 C	959.924710	-0.302	100%	3.60
50 C	959.924706	-0.306	100%	3.60
20 C	959.924742	-0.269	85%	3.06
20 C	959.924738	-0.273	100%	4.14

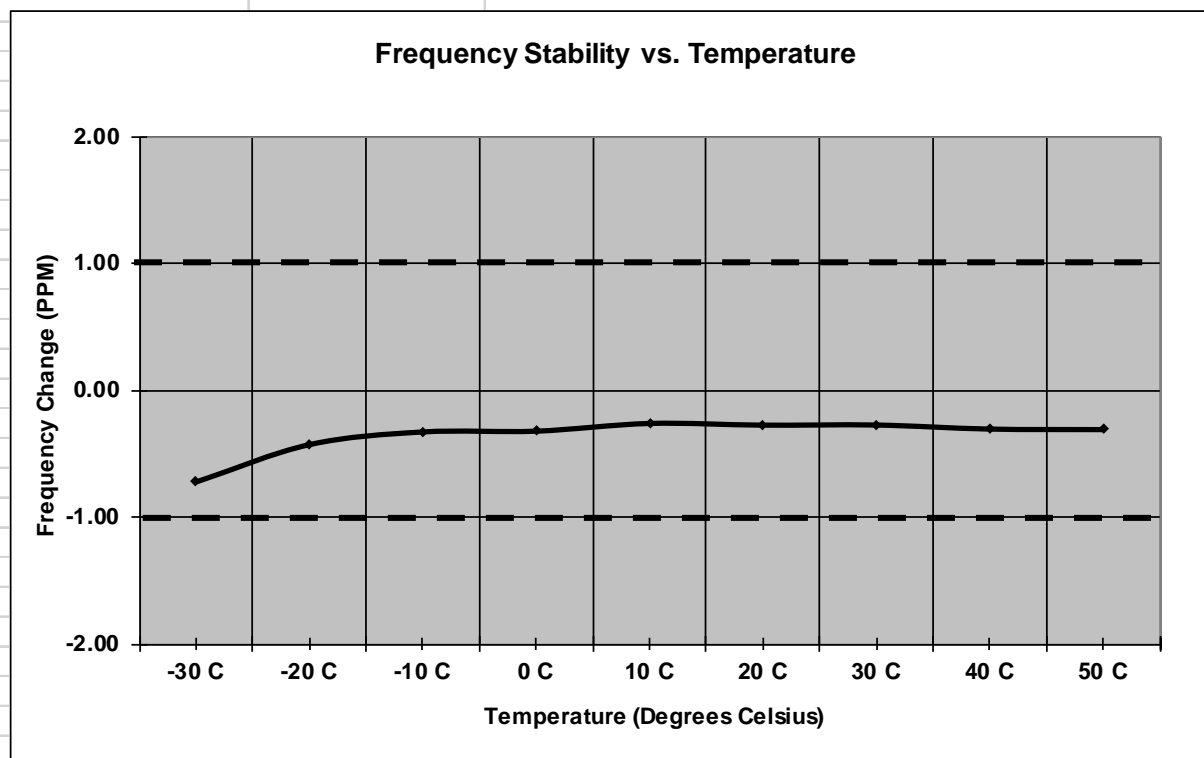


Figure 7.5.2-8: Frequency Stability –959.925 MHz – ILSI

Frequency Stability

Frequency (MHz): 959.925

Deviation Limit (PPM): 1.0ppm

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	959.925252	0.263	100%	3.60
-20 C	959.925229	0.239	100%	3.60
-10 C	959.924962	-0.040	100%	3.60
0 C	959.924742	-0.269	100%	3.60
10 C	959.924784	-0.225	100%	3.60
20 C	959.924983	-0.018	100%	3.60
30 C	959.925169	0.176	100%	3.60
40 C	959.925201	0.209	100%	3.60
50 C	959.925213	0.222	100%	3.60
20 C	959.924903	-0.101	85%	3.06
20 C	959.924930	-0.073	100%	4.14

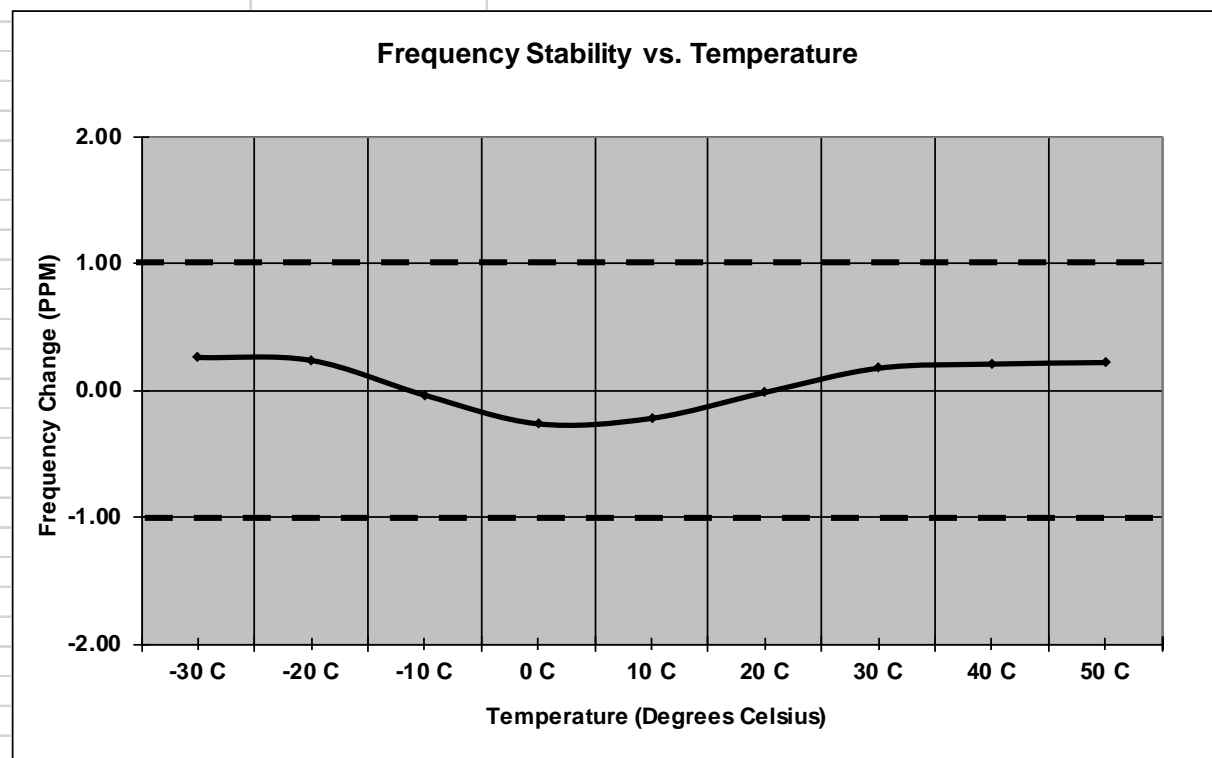


Figure 7.5.2-9: Frequency Stability –959.925 MHz - Taitien

8.0 CONCLUSION

In the opinion of ACS, Inc. the model SGW100, manufactured by Sensus Metering Systems, Inc., meets all the requirements of FCC Part 24D and Part 101 as well as Industry Canada RSS-119 and RSS-134 where applicable.

End Report