

## Certification Test Report

**FCC ID: SDBSLCPIM**  
**IC: 2220A-SLCPIM**  
**FCC Rule Part: CFR 47 Part 24 Subpart D, Part 101 Subpart C**  
**IC Radio Standards Specification: RSS 119, RSS 134**

**ACS Report Number: 15-3019.W06.1A**

**Applicant: Sensus Metering Systems, Inc.**  
**Model: SLCPIM**

**Test Begin Date: June 15, 2015**  
**Test End Date: June 22, 2015**

**Report Issue Date: September 10, 2015**



For The Scope of Accreditation Under Certificate Number AT-1921

This report must not be used by the client to claim product certification, approval, or endorsement by ANAB, ANSI, or any agency of the Federal Government.

**Project Manager:**



**Mario de Aranzeta**  
**Lab Manager Durham (RTP)**  
**Advanced Compliance Solutions, Inc.**

**Reviewed by:**



**Kirby Munroe**  
**Director, Wireless Certifications**  
**Advanced Compliance Solutions, Inc.**

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

**This report contains 64 pages**

# Table of Content

---

<b>1.0 GENERAL</b> -----	<b>3</b>
1.1 PURPOSE -----	3
1.2 PRODUCT DESCRIPTION-----	3
1.3 TEST METHODOLOGY-----	3
1.4 EMISSION DESIGNATORS-----	5
<b>2.0 TEST FACILITIES</b> -----	<b>6</b>
2.1 LOCATION-----	6
2.2 LABORATORY ACCREDITATIONS/RECOGNITIONS/CERTIFICATIONS-----	6
2.3 RADIATED & CONDUCTED EMISSIONS TEST SITE DESCRIPTION -----	7
<b>3.0 APPLICABLE STANDARD REFERENCES</b> -----	<b>9</b>
<b>4.0 LIST OF TEST EQUIPMENT</b> -----	<b>10</b>
<b>5.0 SUPPORT EQUIPMENT</b> -----	<b>11</b>
<b>6.0 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM</b> -----	<b>11</b>
<b>7.0 SUMMARY OF TESTS</b> -----	<b>12</b>
7.1 RF POWER OUTPUT -----	12
7.2 OCCUPIED BANDWIDTH-----	13
7.3 SPURIOUS EMISSIONS AT ANTENNA TERMINALS-----	46
7.4 FIELD STRENGTH OF SPURIOUS EMISSIONS -----	55
7.5 FREQUENCY STABILITY-----	60
<b>8.0 CONCLUSION</b> -----	<b>64</b>

## **1.0 GENERAL**

### **1.1 Purpose**

The purpose of this report is to demonstrate compliance with Part 2 Subpart J, Part 24 Subpart D and Part 101 Subpart C of the FCC's Code of Federal Regulations, and Industry Canada Radio Standards Specifications RSS-119 and RSS-134.

### **1.2 Product Description**

The SLCPIM is a NEMA plug-in module and part of the expanding Sensus Streetlight Control System to allow users to monitor and control both legacy and LED streetlights, significantly reducing energy consumption and maintenance costs.

Manufacturer Information:  
Sensus Metering Systems, Inc.  
639 Davis Drive  
Morrisville, NC 27560

Test Sample Serial Numbers: 52001245, 52001244, 52001239, 52001241, 52001243

Test Sample Condition: The EUT was in good functional condition with no physical damages.

### **1.3 Test Methodology**

#### **1.3.1 Configurations and Justification**

The EUT was evaluated for radiated and RF conducted measurements for all modulation formats. Where applicable, data is provided for the unit having the worst case emissions (where the TCXO is KDS). Both Taitien and KDS brands of TCXO's were evaluated.

The EUT was evaluated in its normal operating orientation (blue shell up).

The evaluation for unintentional emission is documented separately in a verification report.

### 1.3.2 In-Band Testing Methodology

The EUT is designed to operate in multiple bands under the requirements of CFR 47 Parts 24 and 101. The following is a list of the frequency bands of operation sorted based on the FCC rule parts in which the band is associated.

CFR Title 47 Rule Part	Frequency Band of Operation (MHz)
24D	901.0 - 902.0
24D	930.0 - 931.0
24D	940.0 - 941.0
101	928.85 - 929.0
101	932.0 - 932.5
101	941.0 - 941.5
101	952.0 – 953.0
101	959.85 - 960.0

Based on the requirements set forth in accordance 47 CFR 2.1046-2.1057 as stated above, the methodology in selecting the places to test in the available bands of operation is outlined in the following table.

CFR Title 47 Rule Part	Frequency Band of Operation (MHz)	Location in the Range of Operation	Approx. Test Freq.
24D	901.0 - 902.0	Middle	901.5000
101	928.85 - 929.0	Middle	928.9250
24D	930.0 - 931.0	Middle	930.5000
101	932.0 - 932.5	Middle	932.2500
24D	940.0 - 941.0	1 near top and 1 near bottom	940.0125
101	941.0 - 941.5		941.4875
101	952.0 – 953.0	Middle	952.5000
101	959.85 – 960.0	Middle	959.9250

## 1.4 Emission Designators

The SLCPIM transmitter produces six distinct modulation formats. The emission designators for the modulation types used by the SLCPIM transmitter calculated using the baud rate defined in the Theory of Operation are as follows

### EMISSIONS DESIGNATORS:

Normal Mode:	9K60F2D (7-FSK)
Double Density Mode:	9K60F2D (13-FSK)
C&I Mode (Half-Baud):	4K80F2D (7-FSK)
Priority Mode:	4K80F2D (13-FSK)
MPass Mode (5 kbps):	5K90F1D (2-GFSK)
MPass Mode (10 kbps):	11K8F1D (2-GFSK)

## **2.0 TEST FACILITIES**

### **2.1 Location**

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions, Inc.  
2320 Presidential Dr. Suite 101  
Durham NC 27703-8077  
Phone: (919) 381-4235  
[www.acstestlab.com](http://www.acstestlab.com)

FCC Test Firm Registration #: 637011  
Industry Canada Lab Code: 20446

### **2.2 Laboratory Accreditations/Recognitions/Certifications**

ACS (Durham) is accredited to ISO/IEC 17025 by ANSI-ASQ National Accreditation Board/ANAB accreditation program, and has been issued certificate number AT-1921 in recognition of this accreditation. Unless otherwise specified, all tests methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

**2.3 Radiated & Conducted Emissions Test Site Description**

**2.3.1 Semi-Anechoic Chamber Test Site**


The Semi-Anechoic Chamber Test Site consists of an 18' x 28' x 18' shielded enclosure. The chamber is lined with Samwha Electronics Co. LTD Ferrite Absorber, model number SFA300 (HSN-1). The ferrite tile is 10cm x 10 cm and weighs approximately 1.4lbs. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber. On top of the ferrite tiles is DMAS HT-45 (Dutch Microwave Absorber Solutions) hybrid absorber on all walls except the wall behind the antenna mast which has a shorter DMAS HT-25 absorber.

The turntable is 1.50m in diameter and is located 150cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using short #6 copper wire. The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the turntable. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane.

Behind the turntable is a 2' x 6' x 1.5' deep shielded pit used for support equipment if necessary. The pit is equipped with 2 - 4" PVC chase from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

To comply with the requirements of the test methods given on page 4, RF absorbing foam was placed inside the chamber in a configuration that provided the best results. First, a 12ft X 12ft. patch of 10" tall absorber was placed on the floor between the turntable and the receiving antenna. This absorber meets the absorption requirements specified in ANSI C63.4:2014.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3.1-1 below:

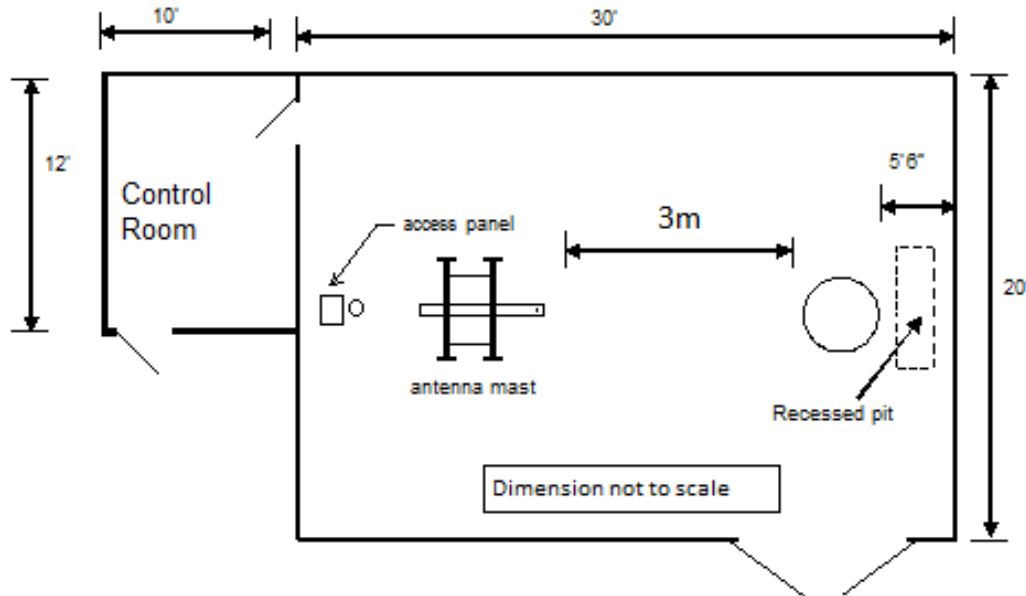

**Figure 2.3.1-1: Semi-Anechoic Chamber Test Site**

### 2.3.2 Conducted Emissions Test Site Description

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 10' sheet galvanized steel horizontal ground reference plane (GRP) bonded every 6" to an 8' X 8' aluminum vertical ground plane.

A diagram of the room is shown below in figure 2.3.2-1:

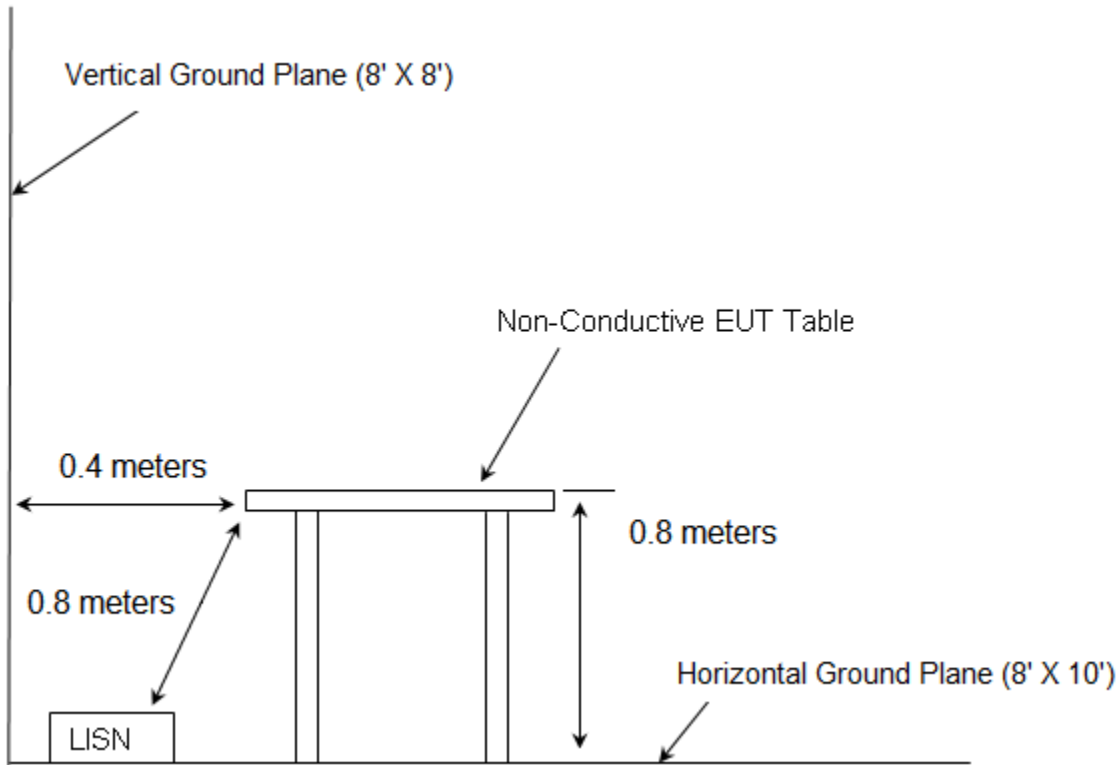


Figure 2.3.2-1: AC Mains Conducted EMI Site



### **3.0 APPLICABLE STANDARD REFERENCES**

The following standards were used:

- 1 - ANSI C63.4-2014: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9 kHz to 40GHz - 2014
- 2 - US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures - 2015
- 3 - US Code of Federal Regulations (CFR): Title 47, Part 24, Subpart D: Personal Communications Services – 2015
- 4 - US Code of Federal Regulations (CFR): Title 47, Part 101, Subpart C: Fixed Microwave Services - 2015
- 5 – TIA-603-D: Land Mobile FM or PM - Communications Equipment - Measurement and Performance Standards – 2010
- 6 – Industry Canada Radio Standards Specification: RSS-119 - Radio Transmitters and Receivers Operating in the Land Mobile and Fixed Services in the Frequency Range 27.41-960 MHz, Issue 11, June 2011
- 7 – Industry Canada Radio Standards Specification: RSS-134 - 900 MHz Narrow Band Personal Communication Service, Issue 1, March 2000
- 8 – Industry Canada Radio Standards Specification: RSS-GEN – General Requirements for Compliance of Radio Apparatus, Issue 4, November 2014.

#### 4.0 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

**Table 4-1: Test Equipment**

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
3002	Rohde & Schwarz	ESU40	Receiver	100346	7/25/2014	7/25/2015
3038	Florida RF Labs	NMSE-290AW-60.0-NMSE	Cable Set	1448	1/12/2015	1/12/2016
3039	Florida RF Labs	NMSE-290AW-396.0-NMSE	Cable Set	1447	1/12/2015	1/12/2016
3016	Fei Teng Wireless Technology	HA-07M18G-NF	Antennas	2013120203	1/14/2015	1/14/2016
626	EMCO	3110B	Antennas	9411-1945	2/26/2014	2/26/2016
277	Emco	93146	Antennas	9904-5199	9/2/2014	9/2/2016
3006	Rohde & Schwarz	TS-PR18	Amplifiers	122006	7/24/2014	7/24/2015
3054	Mountain View Cable	BMS-RG400-36.0-BMS	Cables	3054	1/12/2015	1/12/2016
3020	Rohde & Schwarz	SMB100A	Signal Generators	175943	7/24/2014	7/24/2015
3008	Rohde & Schwarz	NRP2	Meter	103131	1/15/2015	1/15/2016
3009	Rohde & Schwarz	NRP-Z81	Meter	102397	1/15/2015	1/15/2016
3046	Aeroflex Inmet	26AH-10	Attenuator	1443	1/15/2015	1/15/2016
3033	Hasco, Inc.	HLL142-S1-S1-36	Cables	1435	1/15/2015	1/15/2016
3034	Hasco, Inc.	HLL142-S1-S1-12	Cables	3076	1/18/2015	1/18/2016
3012	Rohde & Schwarz	EMC32-EB	Software	100731	1/19/2015	7/19/2016
RE164	Thermotron	S-1.2C	Environmental Chamber	22857	1/14/2015	1/14/2016
3028	Micro-Tronics	HPM50111	Filter	122	1/17/2015	1/17/2016
3014	EMCO	3115	Antennas	9901-5653	2/10/2015	2/10/2016
3031	Hasco, Inc.	HLL335-S1-S1-96	Cables	3074	1/14/2015	1/14/2016

**DMAS MT-25 RF absorber material was used on the floor for all final measurements above 1 GHz.**

**NCR = No Calibration Required**

**Firmware Version: ESU40 is 4.73 SP1**

**Software Version: EMC32-B is 9.15**

5.0 SUPPORT EQUIPMENT

Table 5-1: EUT and Support Equipment

Item #	Type Device	Manufacturer	Model/Part #	Serial #
1	EUT	Sensus Metering Systems, Inc.	SLCPIM	52001245, 52001244, 52001239, 52001241, 52001243
2	Socket fixture	Sensus Metering Systems	N/A	N/A
3	Isolation transformer	Triad	VPS230-570	N/A

Table 5-2: Cable Description

Cable #	Cable Type	Length	Shield	Termination
A	Power	165 cm	No	EUT to transformer
	Power	38cm	No	Transformer to Mains

6.0 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

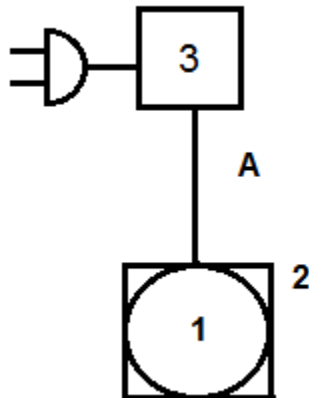


Figure 6-1: EUT Test Setup

## 7.0 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

### 7.1 RF Power Output

#### 7.1.1 Measurement Procedure

The RF output of the equipment under test was directly connected to the input of a wide band RF power meter through 30 dB passive attenuation. Results are shown below.

#### Part 24.132, 101.113 (a), and IC RSS-134 6.2(i), (ii) – Power Output

#### 7.1.2 Measurement Results

**Table 7.1.2-1: Peak Output Power**

Frequency (MHz)	FCC Rule Part	Output Power (dBm)
901.5000	24D	29.8
930.5000	24D	28.4
940.0125	24D	28.1
928.9250	101	28.4
932.2500	101	28.3
941.4875	101	28.0
952.5000	101	27.8
959.9250	101	28.0

## 7.2 Occupied Bandwidth

### 7.2.1 Measurement Procedure

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer through a 50 dB passive attenuation. The spectrum analyzer resolution and video bandwidths were set to 300 Hz and 3000 Hz respectively. The internal correction factors of the spectrum analyzer were employed to correct for any cable or attenuator losses. Results of the test are shown below for all modes of operation.

### 7.2.2 Measurement Results – Emission Masks

#### Part 24.133 a(1), a(2), IC RSS-134 6.3(i), (ii) – Emission Limits

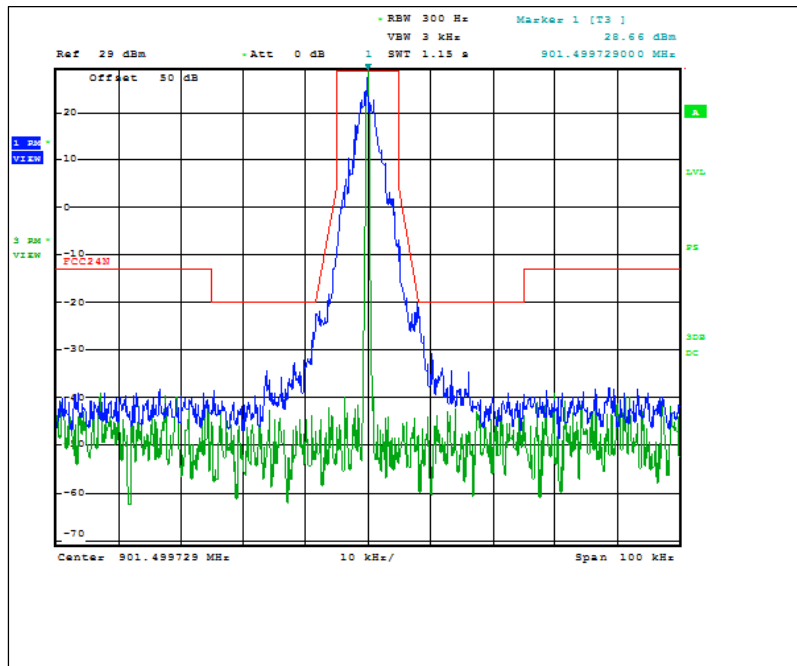


Figure 7.2.2-1: 901.5 MHz – 12.5 kHz Channel Spacing – C&I Mode

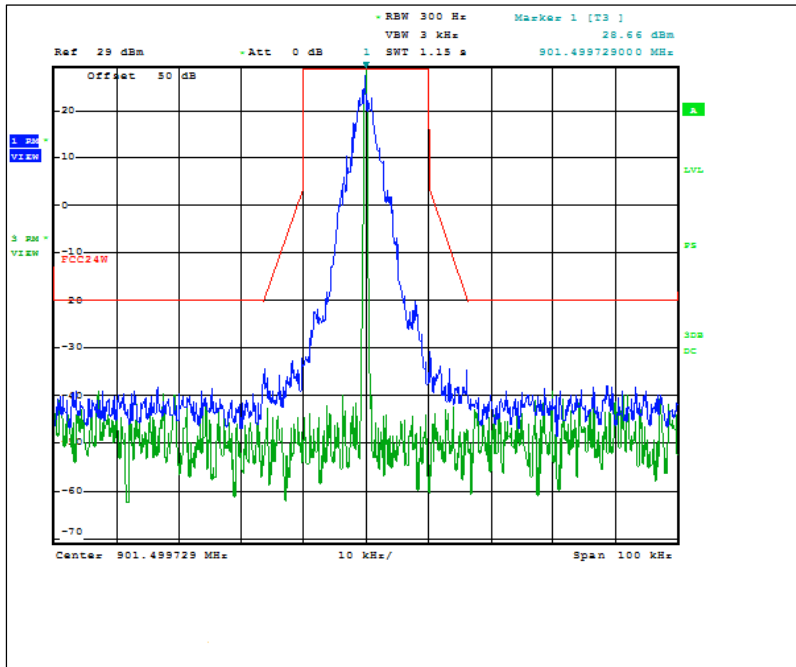


Figure 7.2.2-2: 901.5 MHz – 25 kHz Channel Spacing – C&I Mode

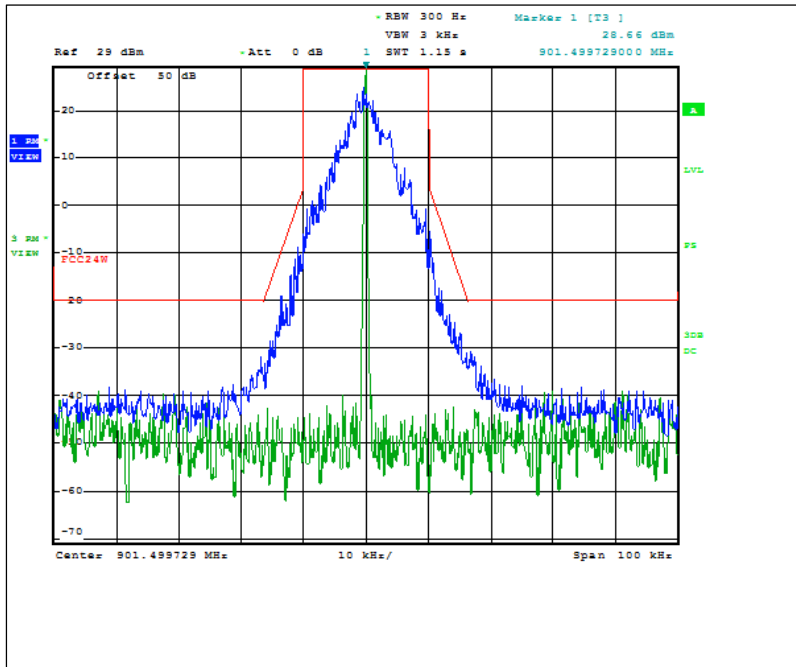


Figure 7.2.2-3: 901.5 MHz – 25 kHz Channel Spacing – Double Density Mode

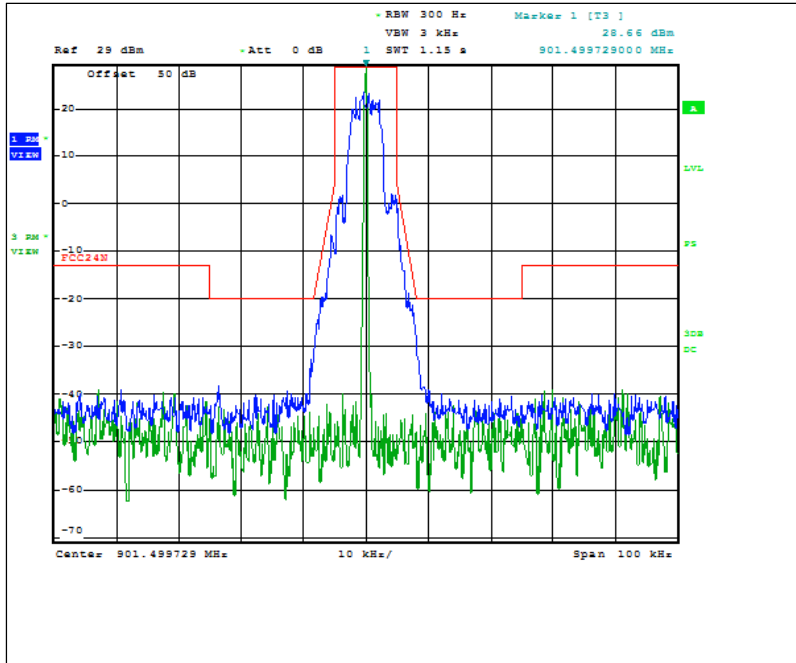


Figure 7.2.2-4: 901.5MHz – 12.5 kHz Channel Spacing – mPass 5k Mode

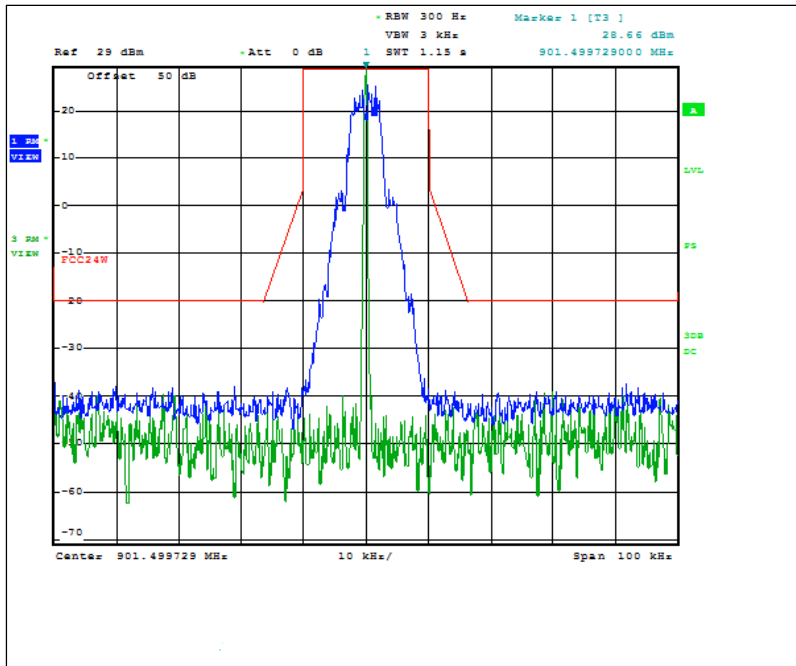


Figure 7.2.2-5: 901.5 MHz – 25 kHz Channel Spacing – mPass 5k Mode

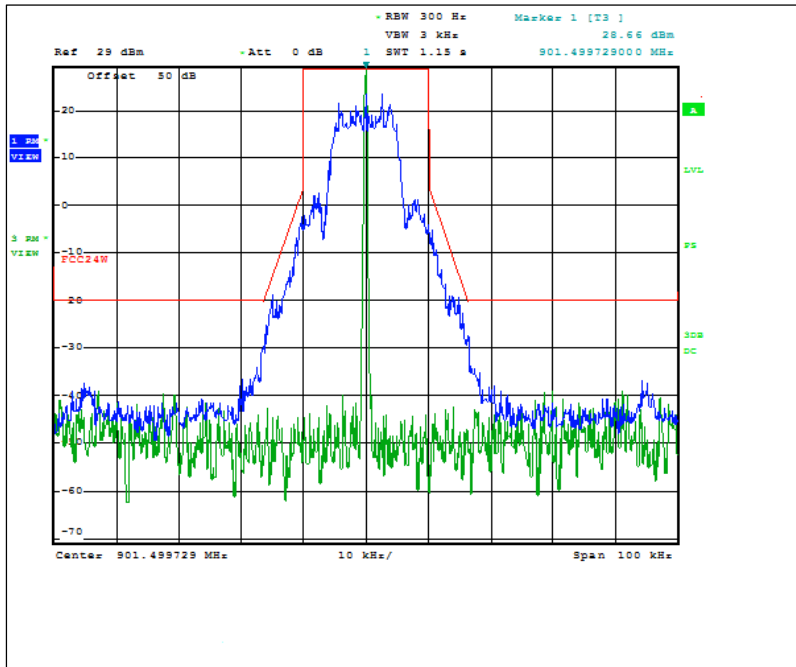


Figure 7.2.2-6: 901.5 MHz – 25 kHz Channel Spacing – mPass 10k Mode

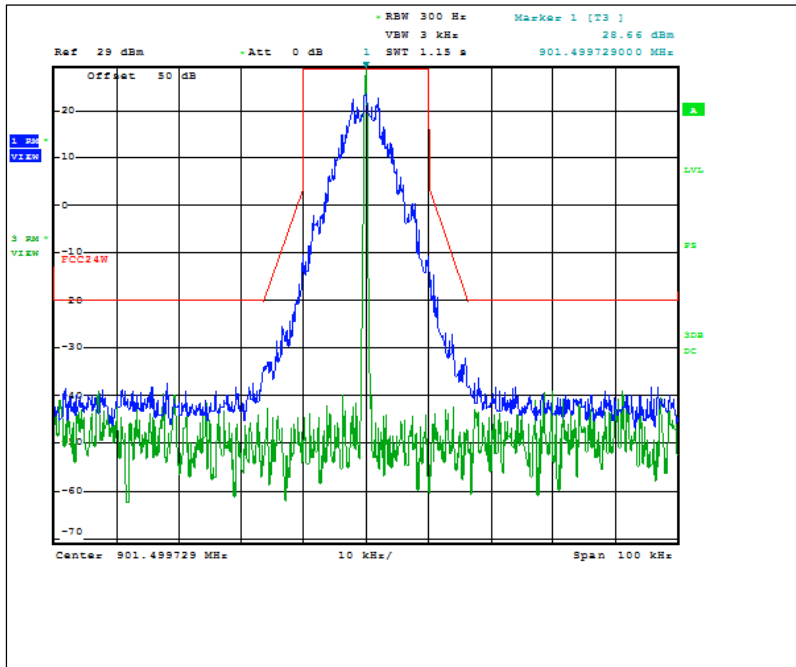


Figure 7.2.2-7: 901.5 MHz – 25 kHz Channel Spacing – Normal Mode



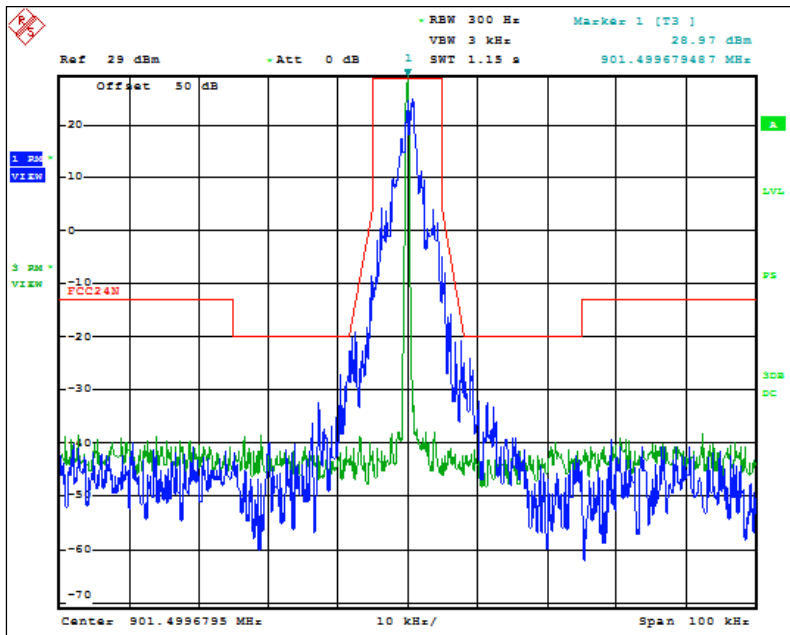


Figure 7.2.2-8: 901.5 MHz – 12.5 kHz Channel Spacing – Priority Mode

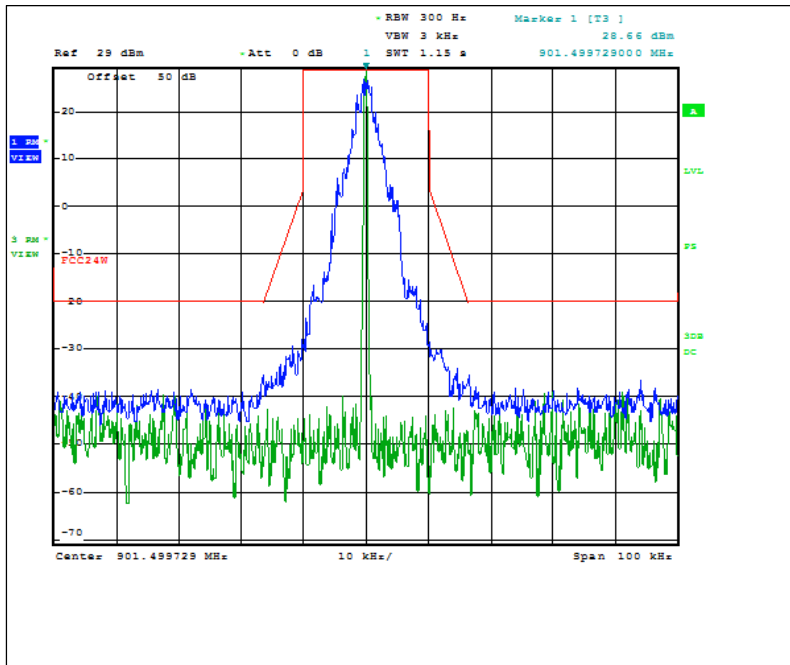


Figure 7.2.2-9: 901.5 MHz – 25 kHz Channel Spacing – Priority Mode

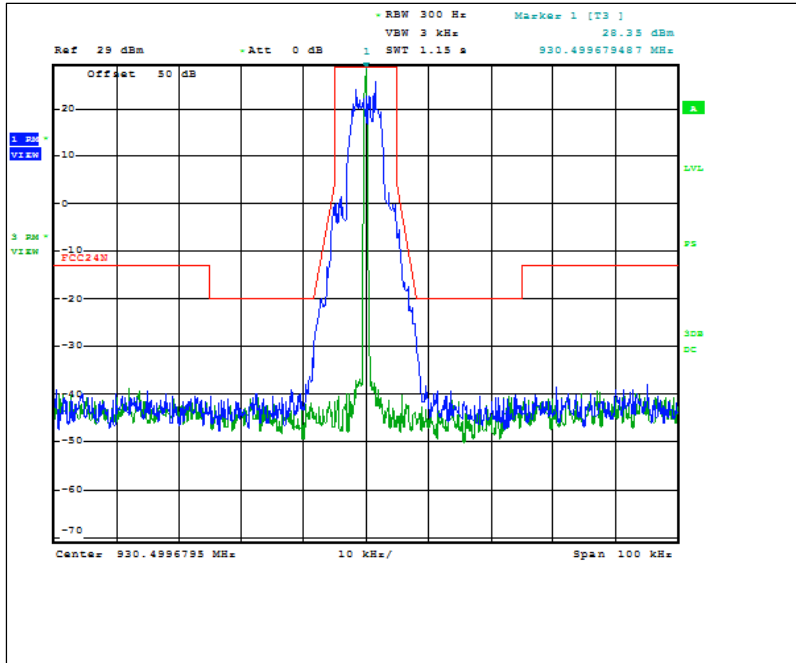


Figure 7.2.2-10: 930.5 MHz - 12.5 kHz Channel Spacing – mPass 5k Mode

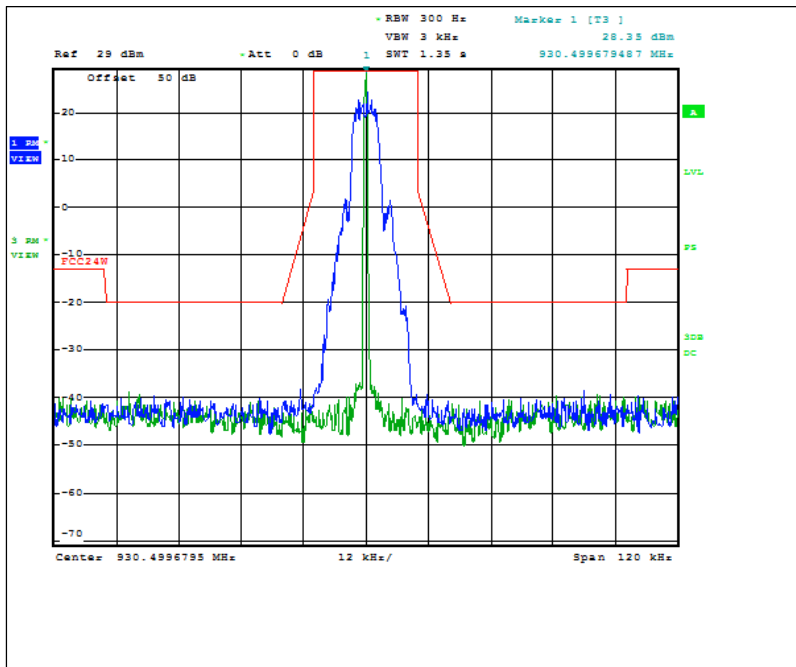


Figure 7.2.2-11: 930.5 MHz – 25 kHz Channel Spacing – mPass 5k Mode

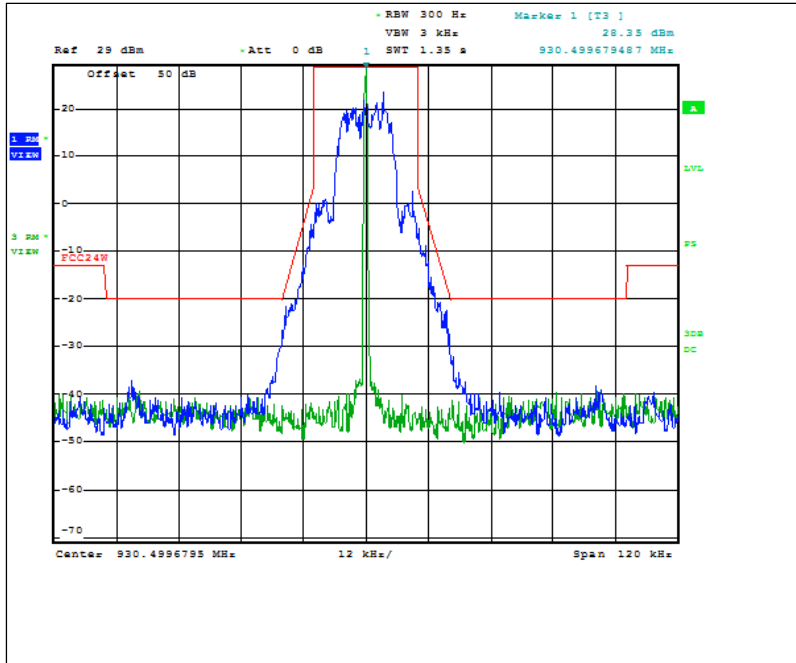


Figure 7.2.2-12: 930.5 MHz – 25 kHz Channel Spacing – mPass 10k Mode

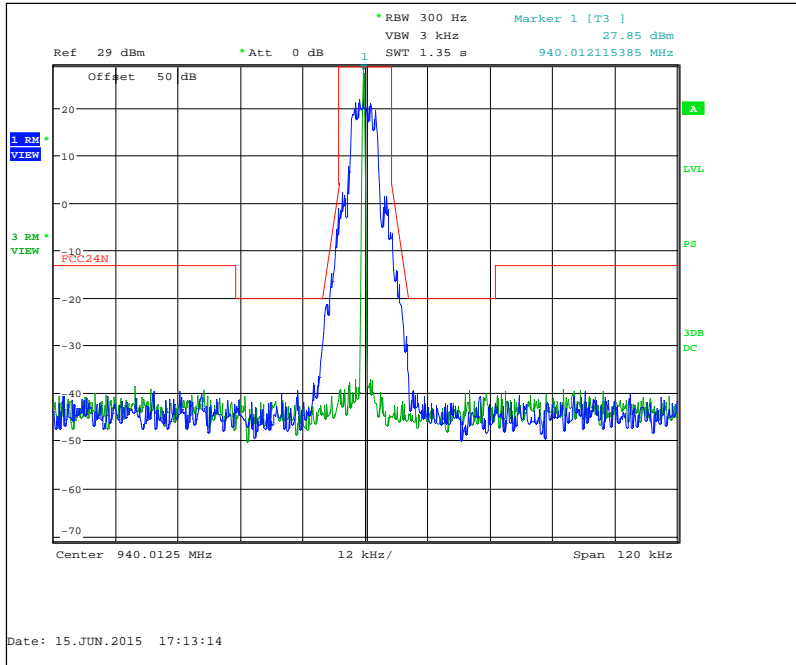


Figure 7.2.2-13: 940.0125 MHz – 12.5 kHz Channel Spacing – mPass 5k Mode

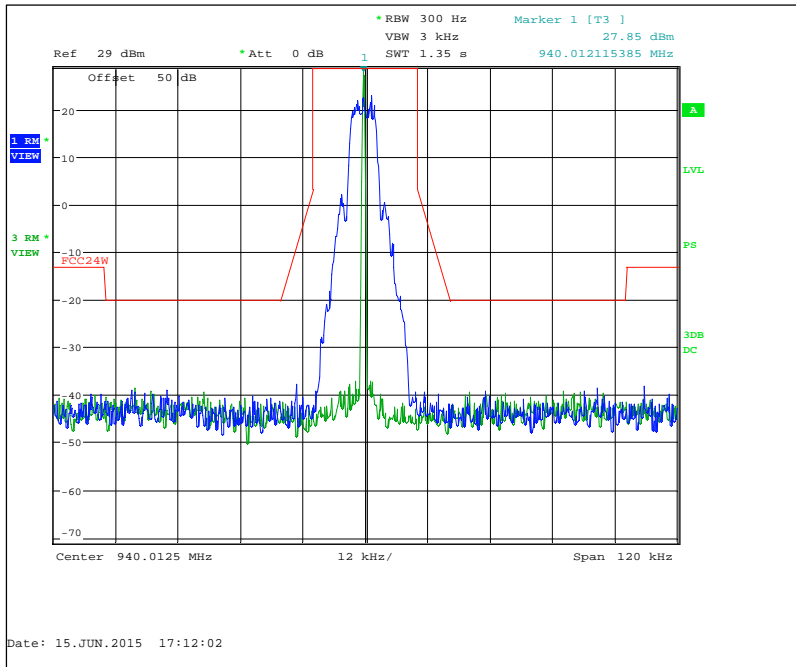


Figure 7.2.2-14: 940.0125 MHz – 25 kHz Channel Spacing – mPass 5k Mode



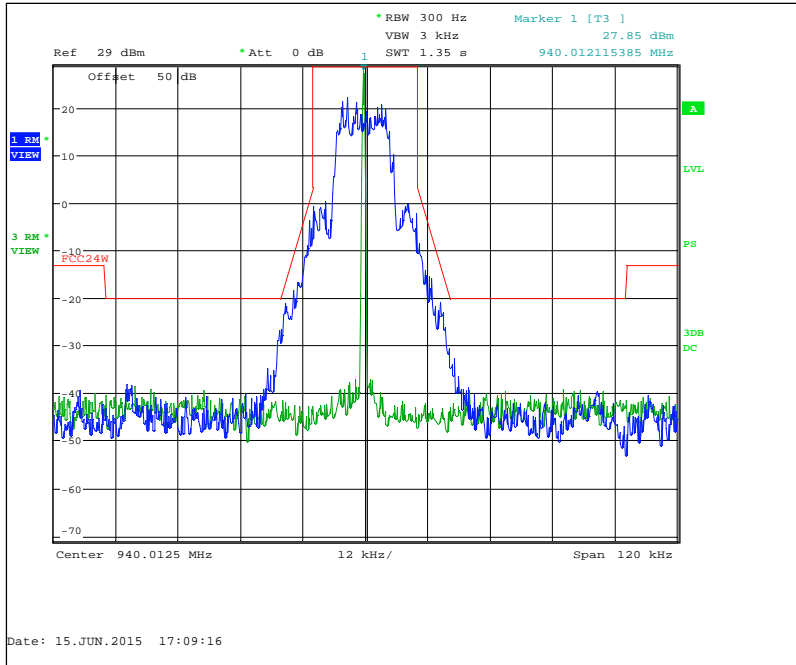


Figure 7.2.2-15: 940.0125 MHz – 25 kHz Channel Spacing – mPass 10k Mode

**Part 101.111 a(6), RSS-119 5.8.6 (FCC Part 101.11a(6) provides worst case)**

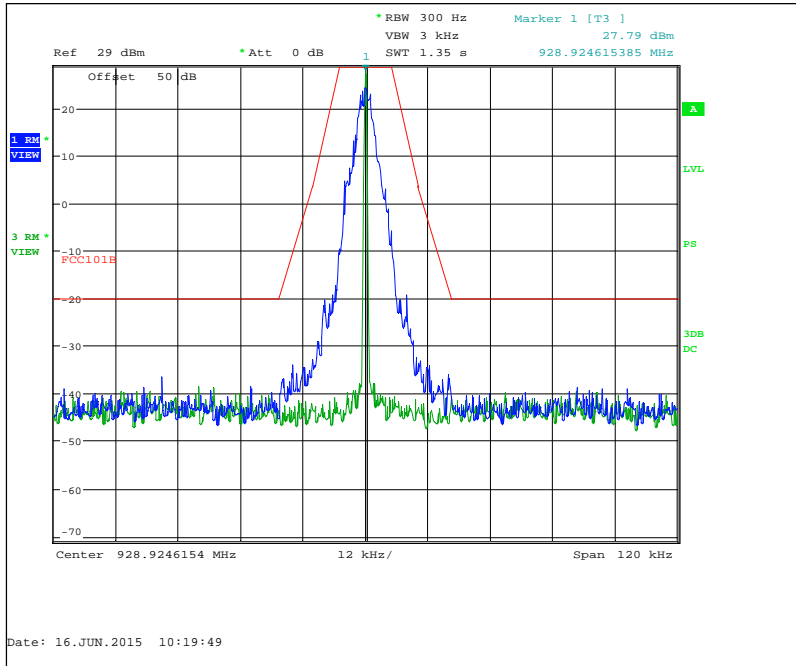

**Figure 7.2.2-16: 928.925 MHz – C&I Mode**

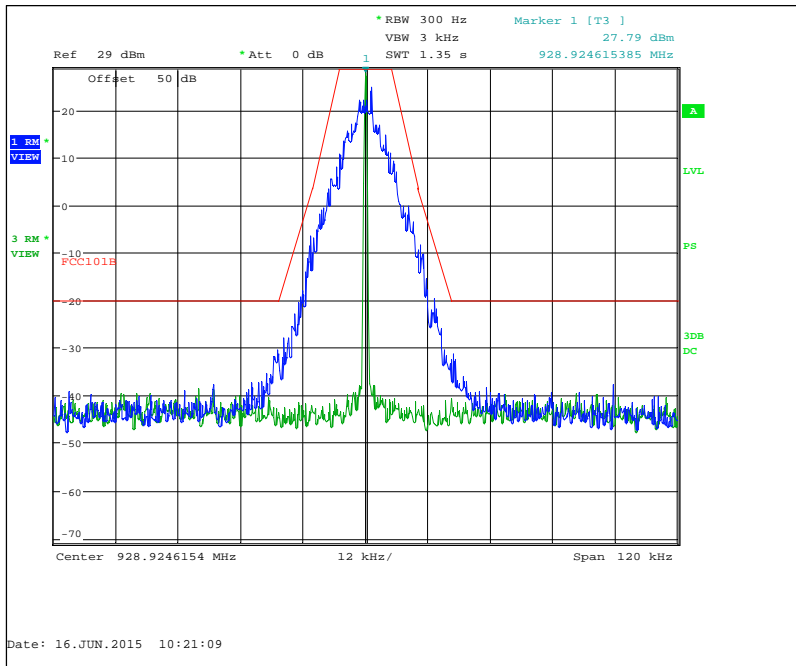

**Figure 7.2.2-17: 928.925 MHz – Double Density Mode**

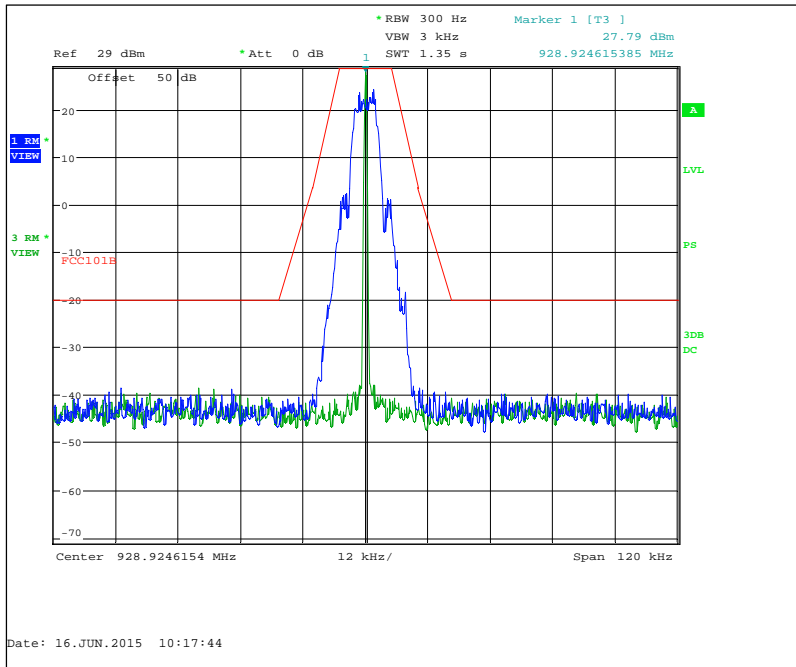


Figure 7.2.2-18: 928.925 MHz – mPass 5k Mode

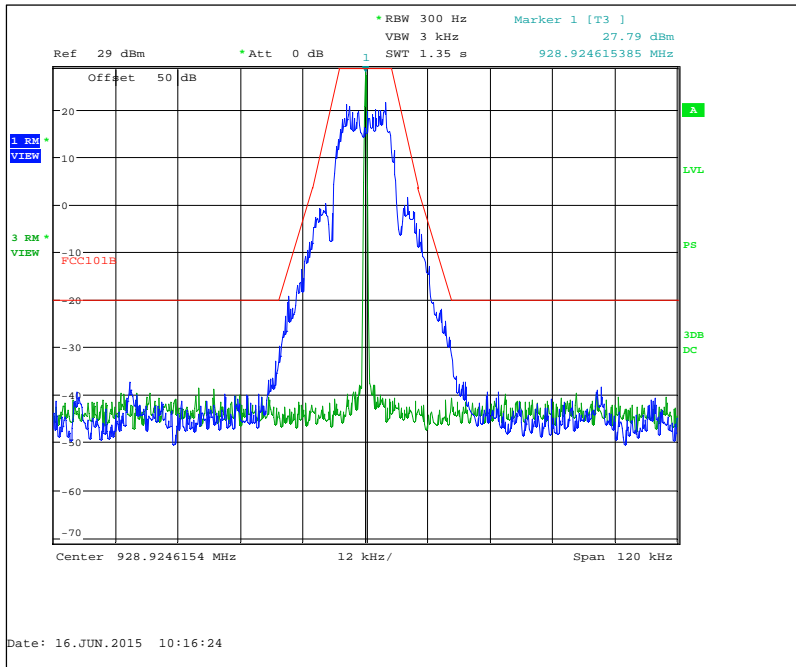


Figure 7.2.2-19: 928.925 MHz – mPass 10k Mode

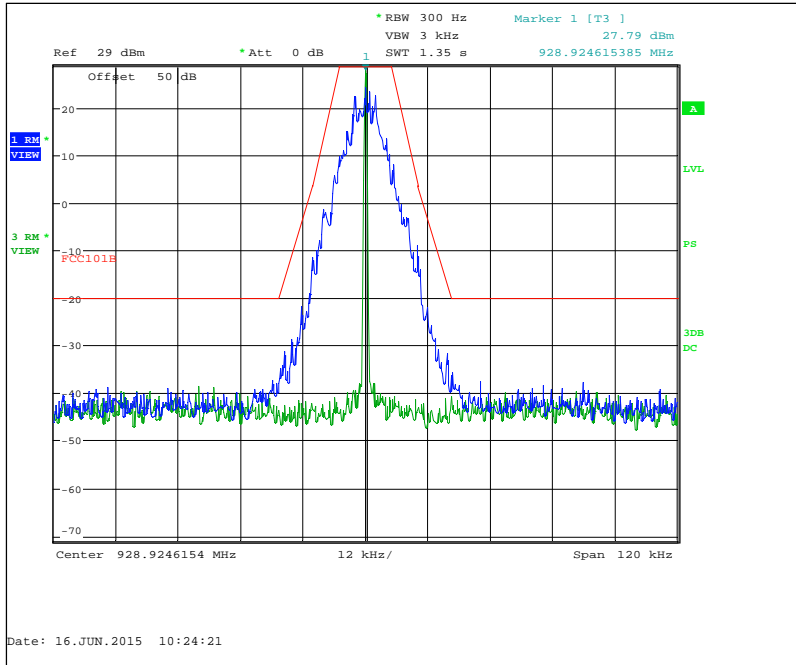


Figure 7.2.2-20: 928.925 MHz – Normal Mode

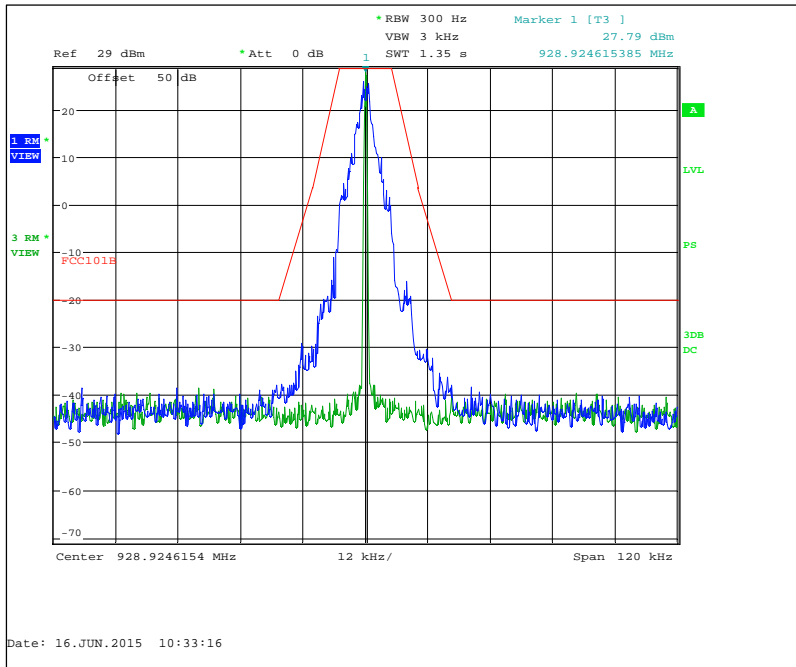


Figure 7.2.2-21: 928.925 MHz — Priority Mode



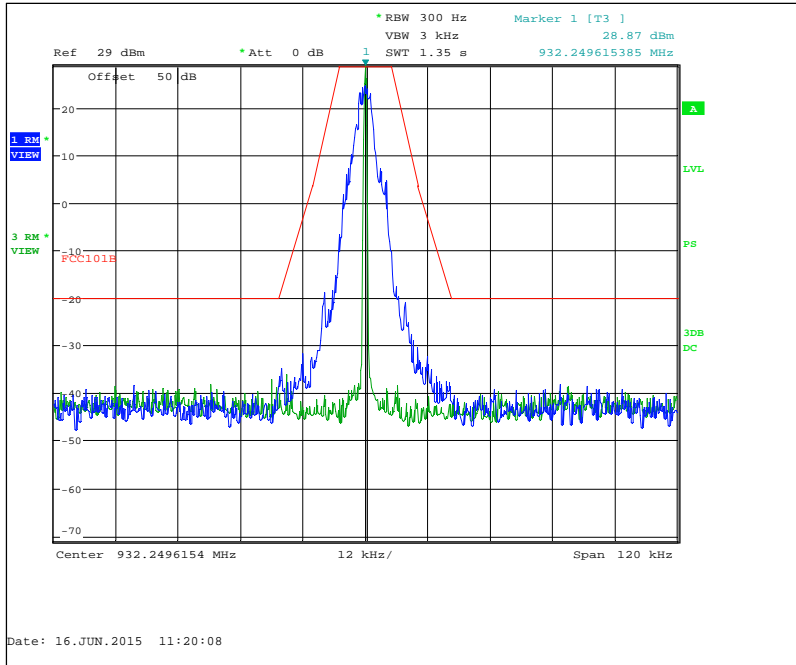


Figure 7.2.2-22: 932.25 MHz – C&I Mode

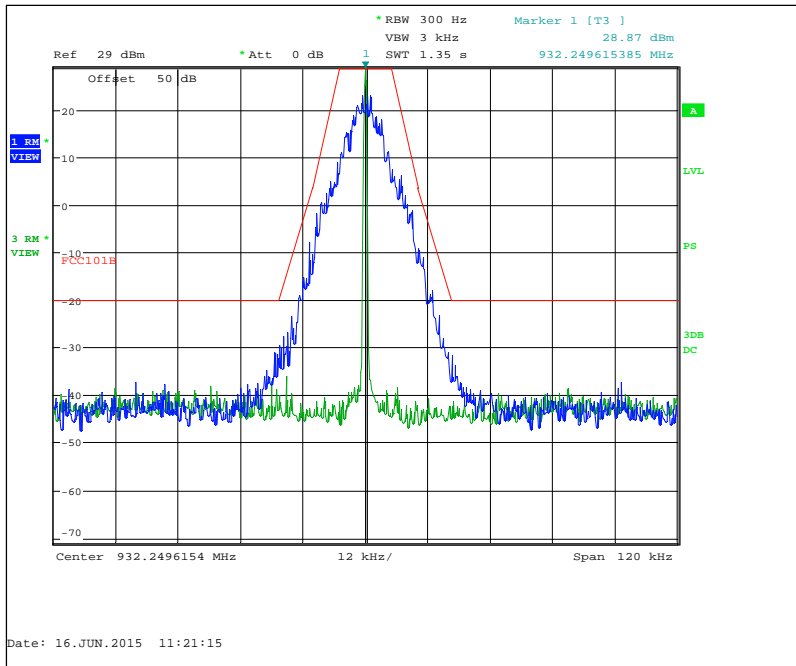


Figure 7.2.2-23: 932.25 MHz – Double Density Mode

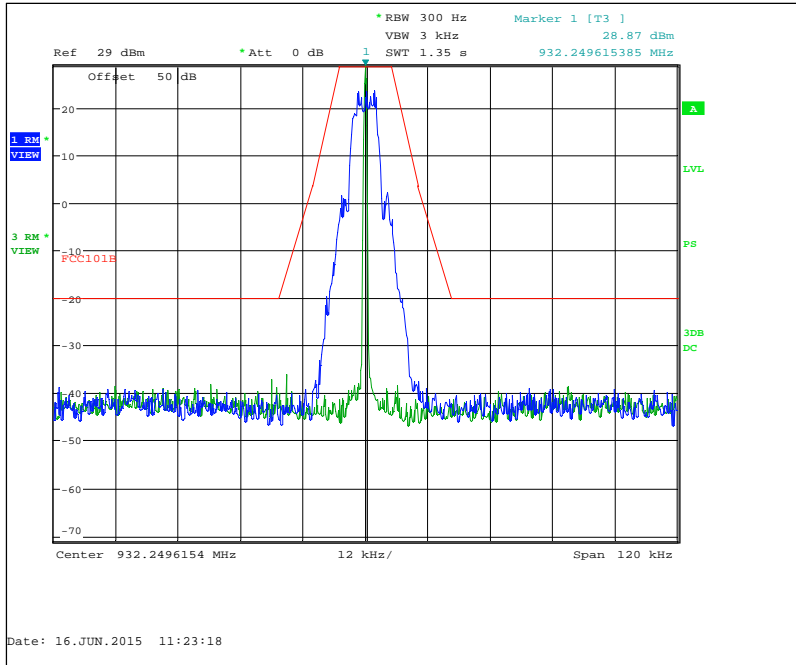


Figure 7.2.2-24: 932.25 MHz – mPass 5k Mode

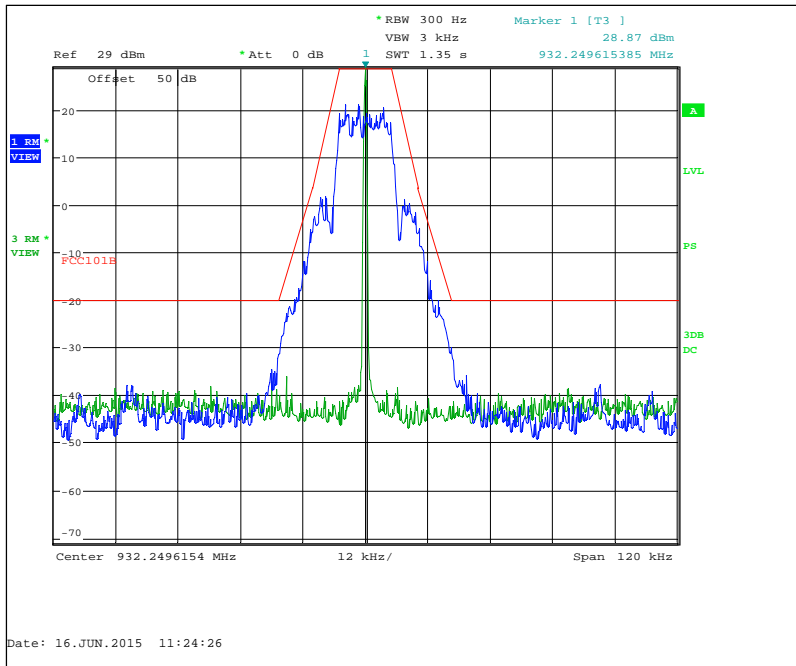


Figure 7.2.2-25: 932.25 MHz – mPass 10k Mode

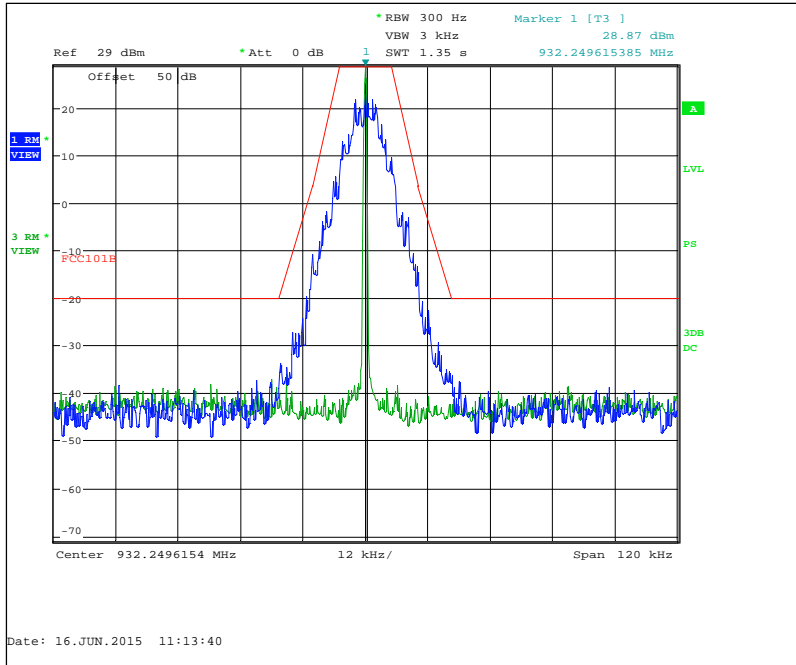


Figure 7.2.2-26: 932.25 MHz – Normal Mode

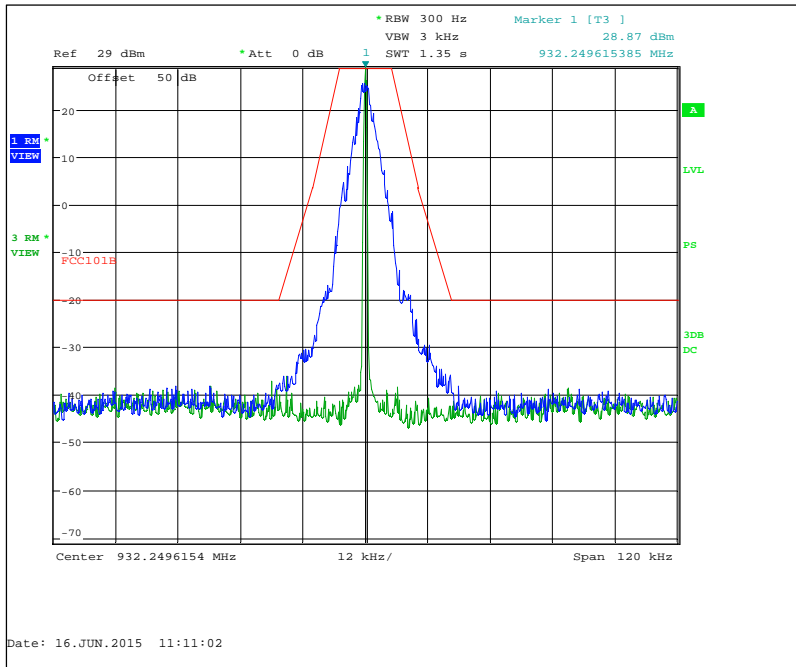


Figure 7.2.2-27: 932.25 MHz — Priority Mode

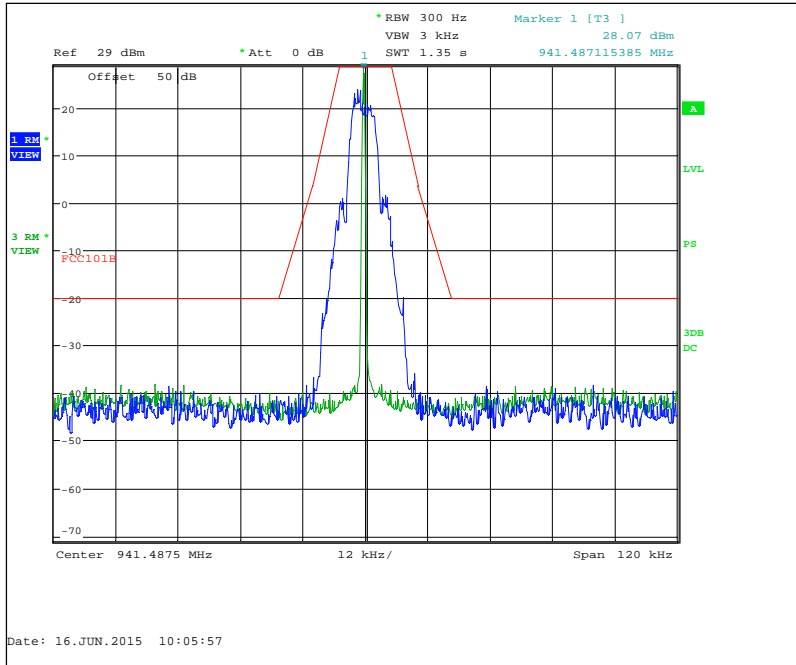


Figure 7.2.2-28: 941.4875 MHz – mPass 5k Mode

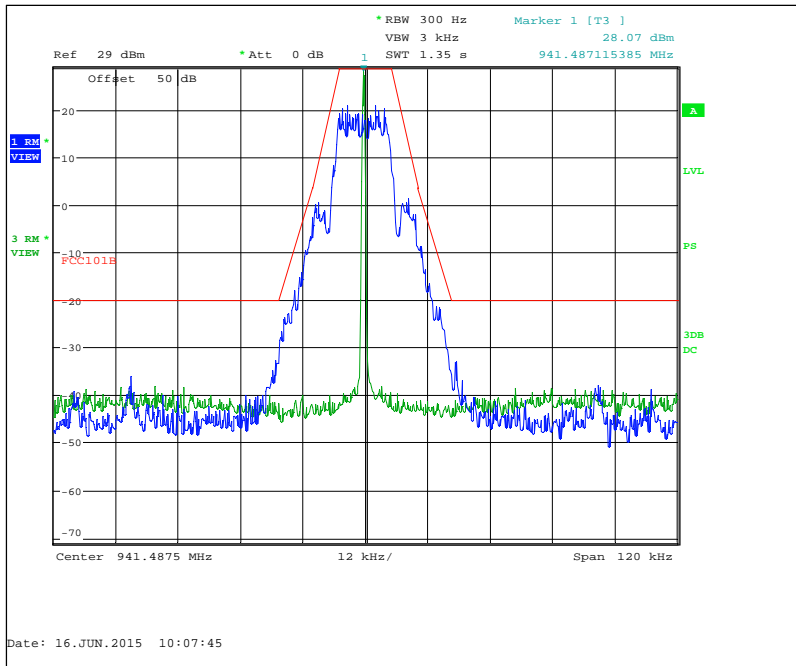


Figure 7.2.2-29: 941.4875 MHz – mPass 10k Mode

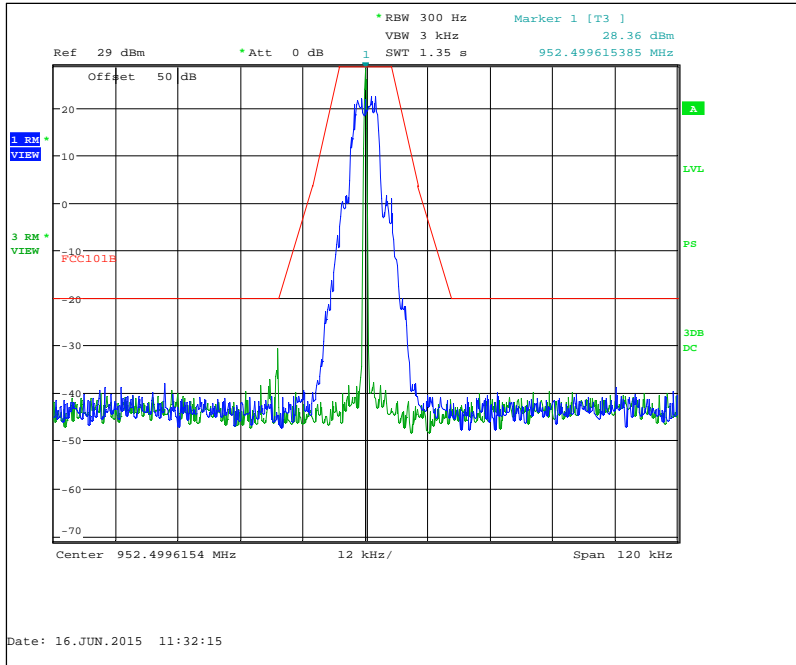


Figure 7.2.2-30: 952.5 MHz – mPass 5k Mode

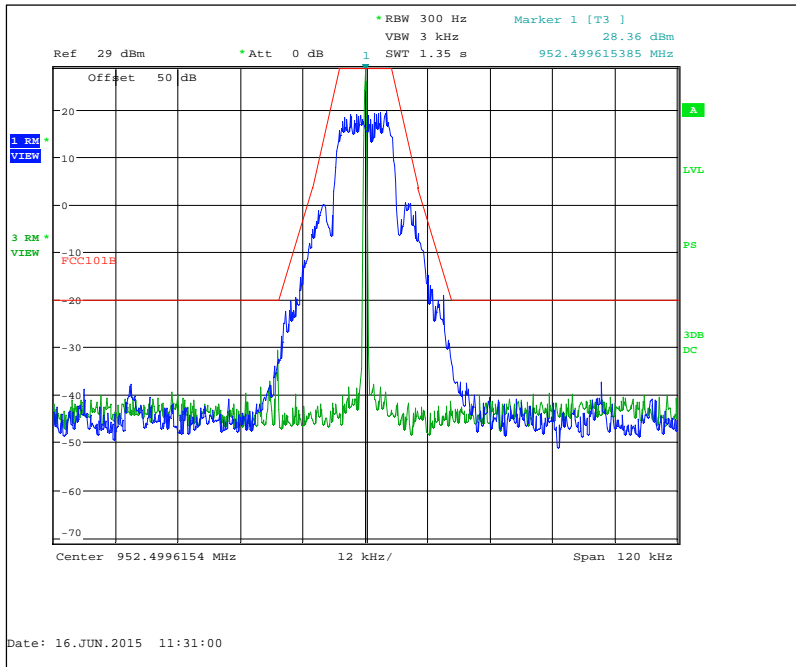


Figure 7.2.2-31: 952.5 MHz – mPass 10k Mode

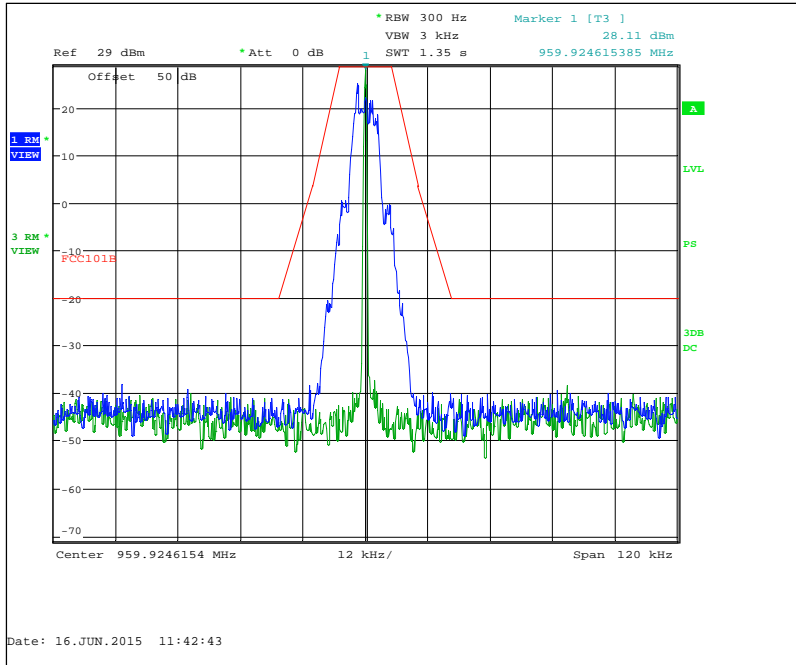


Figure 7.2.2-32: 959.925 MHz – mPass 5k Mode

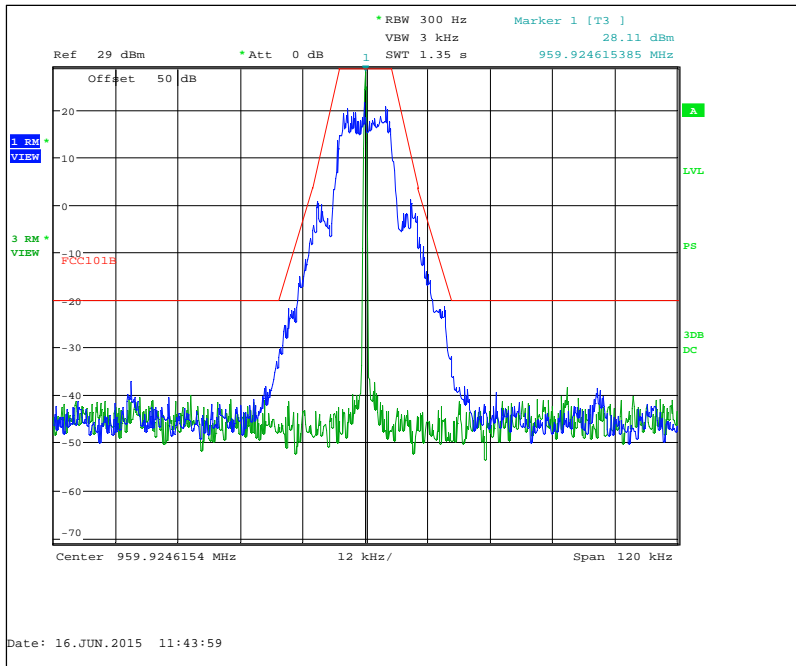


Figure 7.2.2-33: 959.925 MHz – mPass 10k Mode

**7.2.3 Measurement Results – 99% Bandwidth**

Frequency (MHz)	IC Rule Part	Mode of Operation	99% Bandwidth (kHz)
901.5000	RSS-134	C&I	6.0576
901.5000	RSS-134	Double Density	13.5416
901.5000	RSS-134	mPass 5k	5.8653
901.5000	RSS-134	mPass 10k	11.8589
901.5000	RSS-134	Normal	11.6987
901.5000	RSS-134	Priority	6.4903
930.5000	RSS-134	mPass 5k	5.8012
930.5000	RSS-134	mPass 10k	12.0192
940.0125	RSS-134	mPass 5k	5.8012
940.0125	RSS-134	mPass 10k	11.7788
928.9250	RSS-119	C&I	5.9294
928.9250	RSS-119	Double Density	13.5416
928.9250	RSS-119	mPass 5k	5.8333
928.9250	RSS-119	mPass 10k	11.8589
928.9250	RSS-119	Normal	11.9391
928.9250	RSS-119	Priority	6.4903
932.2500	RSS-119	C&I	5.8333
932.2500	RSS-119	Double Density	13.1410
932.2500	RSS-119	mPass 5k	5.8333
932.2500	RSS-119	mPass 10k	11.6185
932.2500	RSS-119	Normal	11.2980
932.2500	RSS-119	Priority	6.5705
941.4875	RSS-119	mPass 5k	5.8974
941.4875	RSS-119	mPass 10k	11.9391
952.5000	RSS-119	mPass 5k	5.8333
952.5000	RSS-119	mPass 10k	11.9391
959.9250	RSS-119	mPass 5k	5.8012
959.9250	RSS-119	mPass 10k	11.6987

IC RSS-GEN 6.6, IC RSS-134

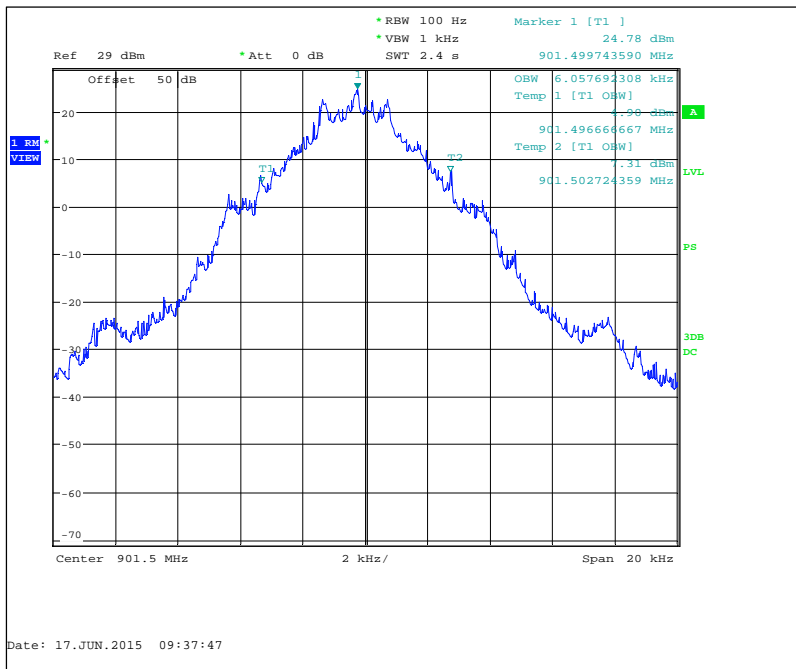


Figure 7.2.3-1: 901.5 MHz – C&I Mode

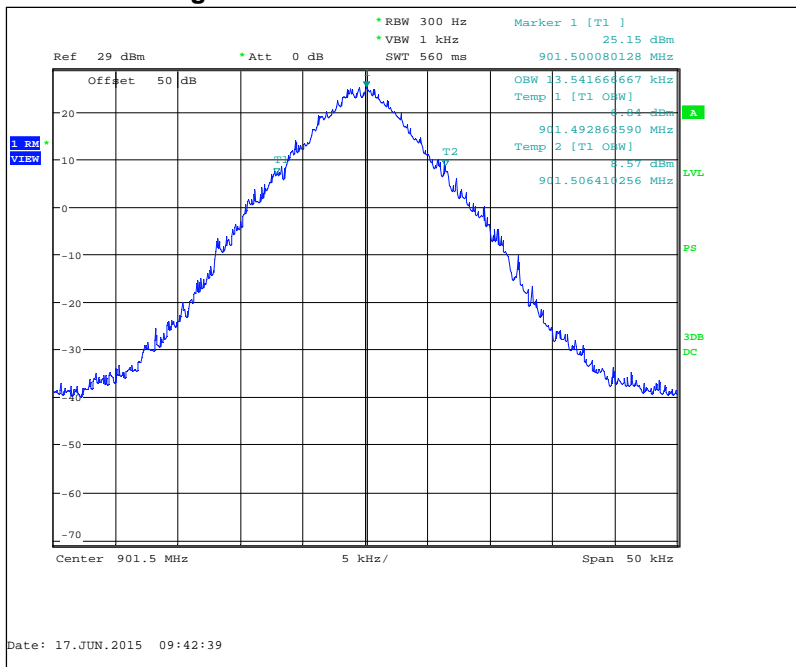


Figure 7.2.3-2: 901.5 MHz – Double Density Mode



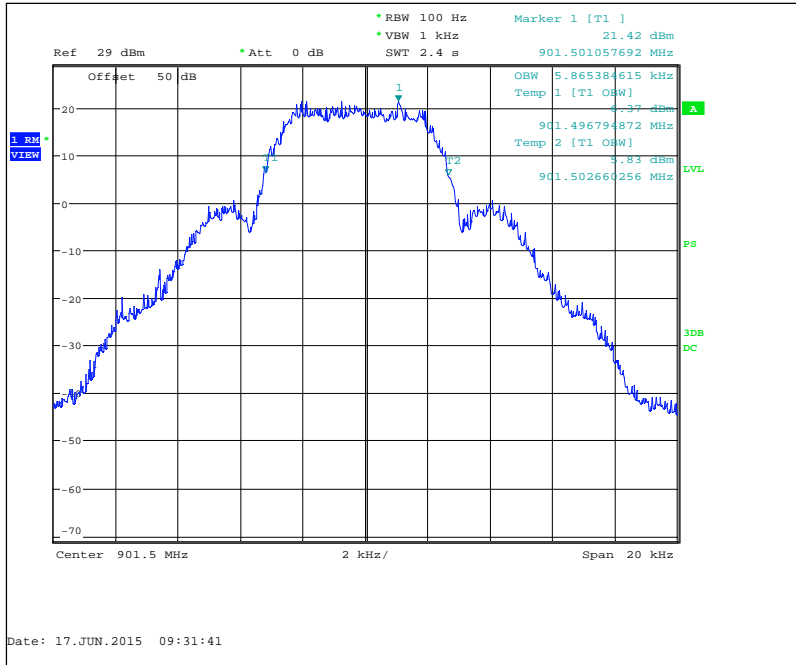


Figure 7.2.3-3: 901.5MHz – mPass 5k Mode

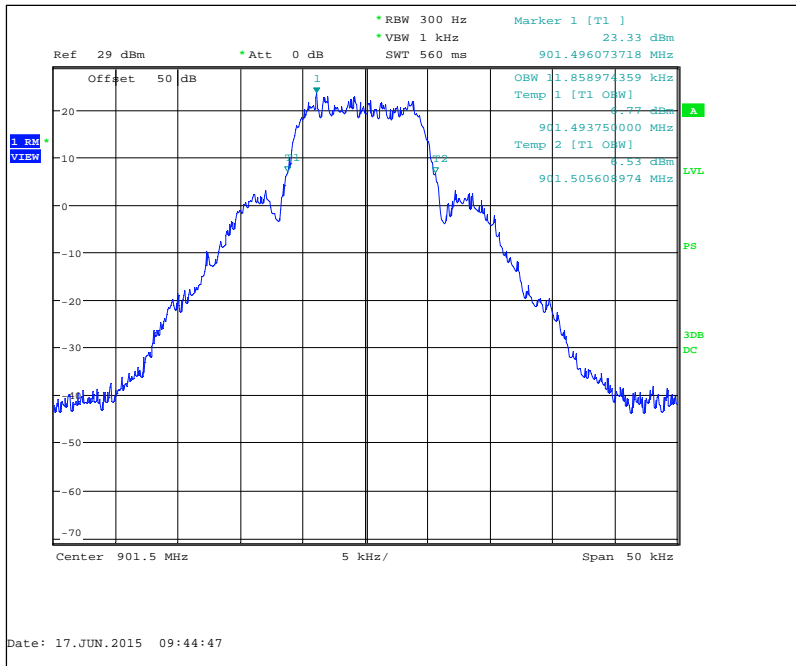


Figure 7.2.3-4: 901.5 MHz – mPass 10k Mode

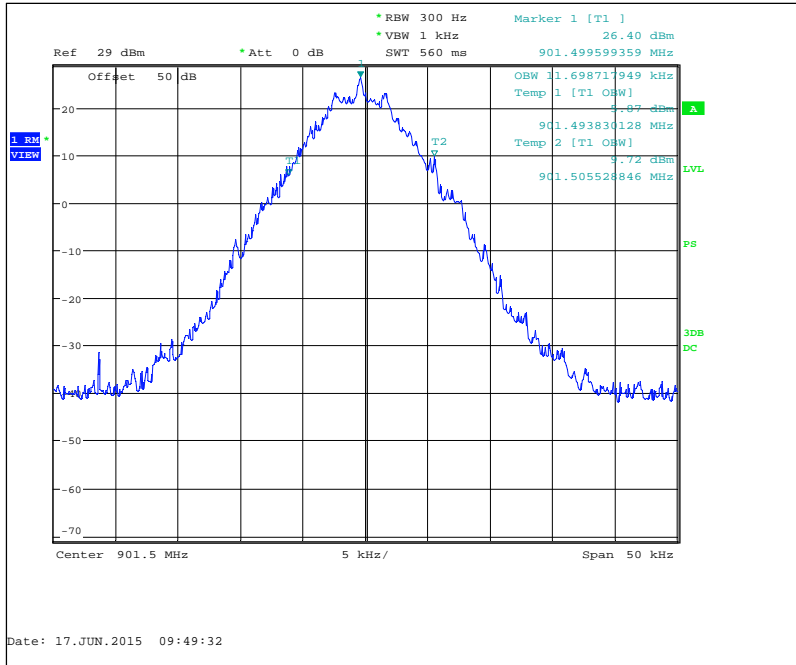


Figure 7.2.3-5: 901.5 MHz – Normal Mode

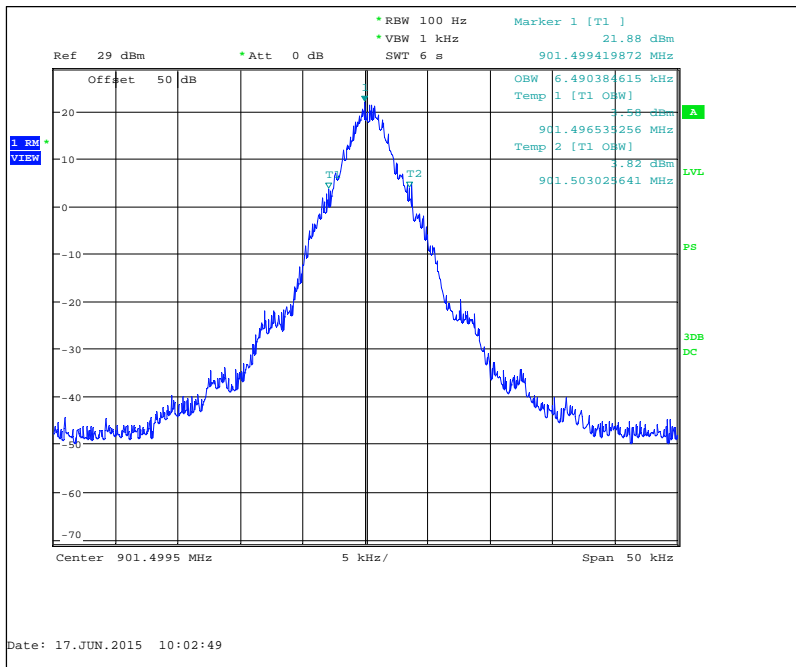


Figure 7.2.3-6: 901.5 MHz – Priority Mode

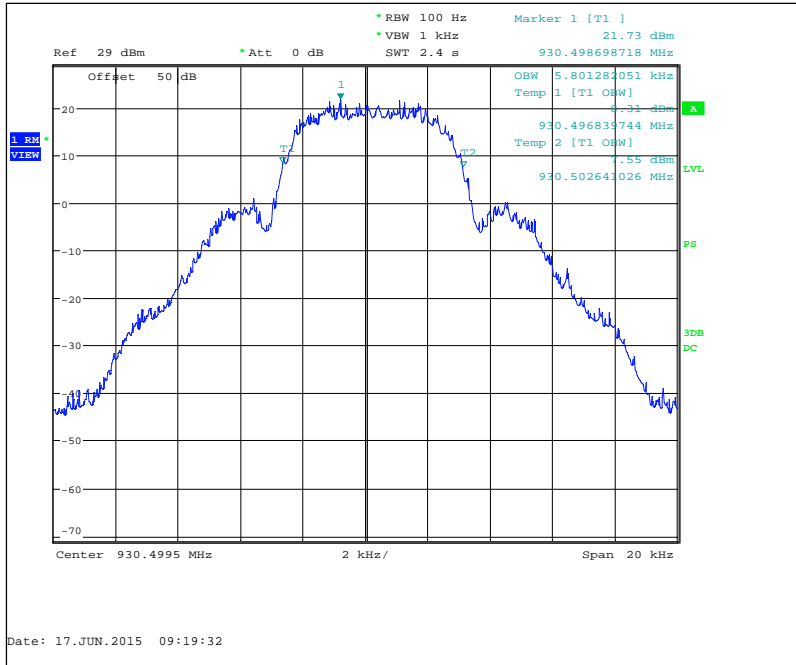


Figure 7.2.3-7: 930.5 MHz – mPass 5k Mode

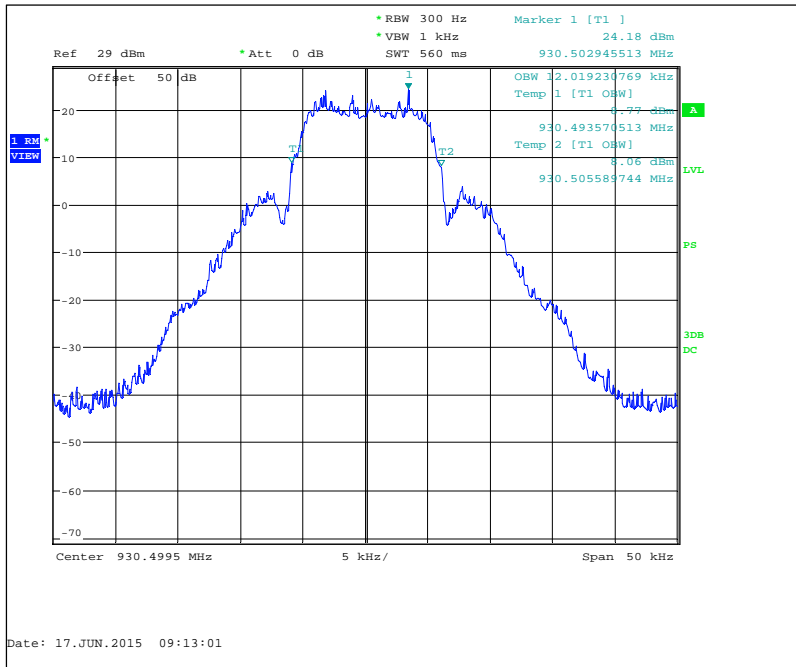


Figure 7.2.3-8: 930.5 MHz – mPass 10k Mode

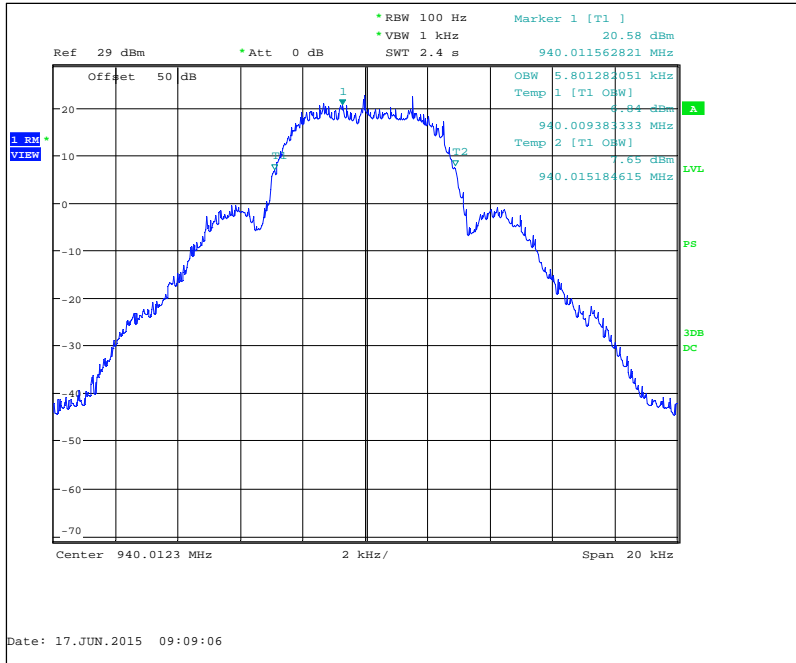


Figure 7.2.3-9: 940.0125 MHz – mPass 5k Mode

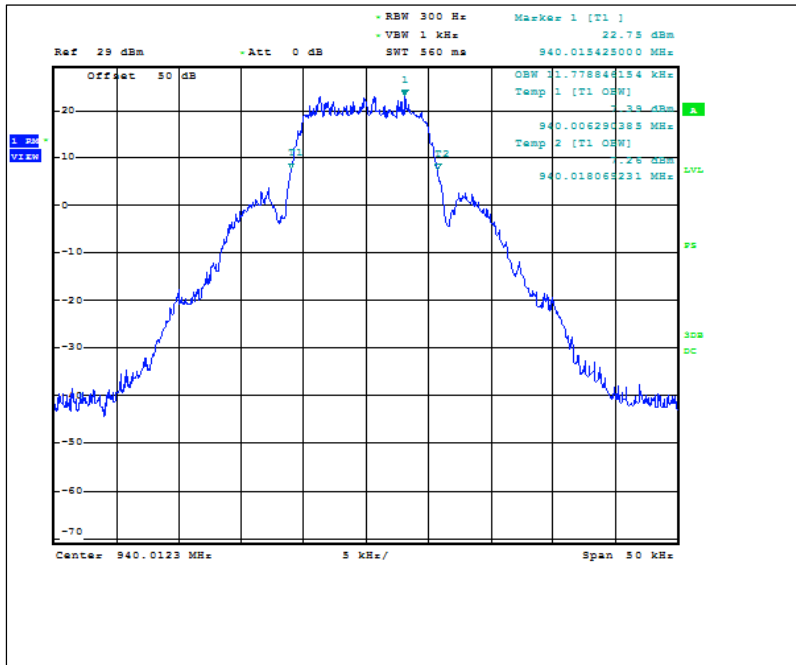


Figure 7.2.3-10: 940.0125 MHz – mPass 10k Mode

IC RSS-GEN 6.6, IC RSS-119

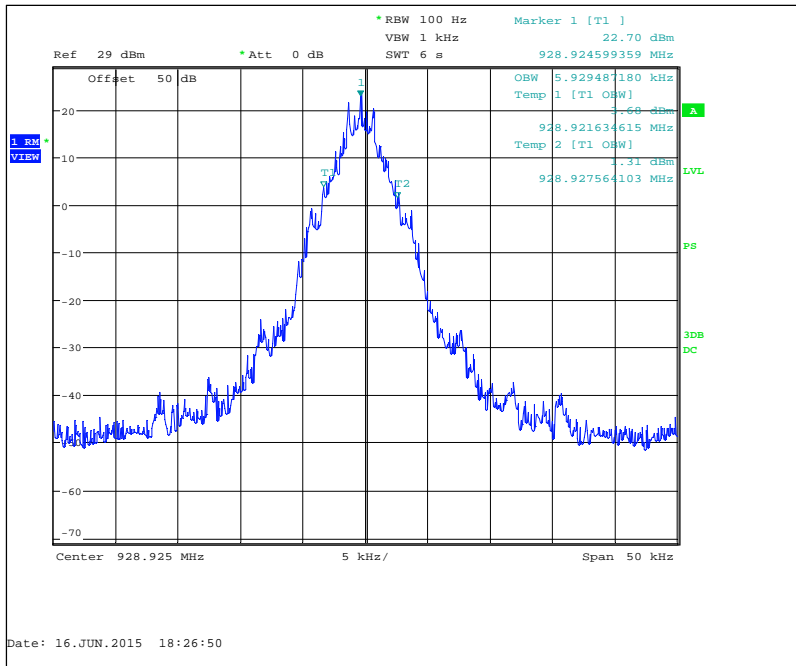


Figure 7.2.3-11: 928.925 MHz – C&I Mode

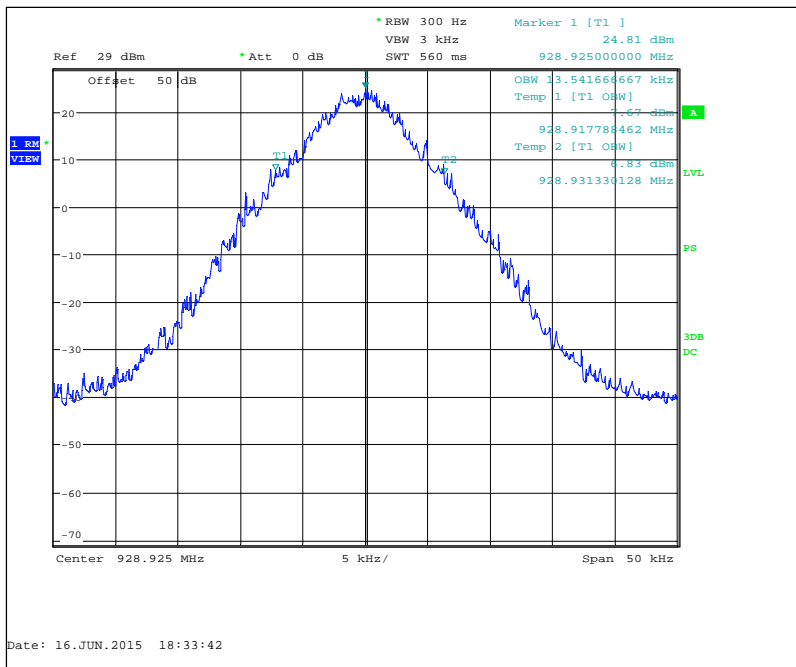


Figure 7.2.3-12: 928.925 MHz – Double Density Mode

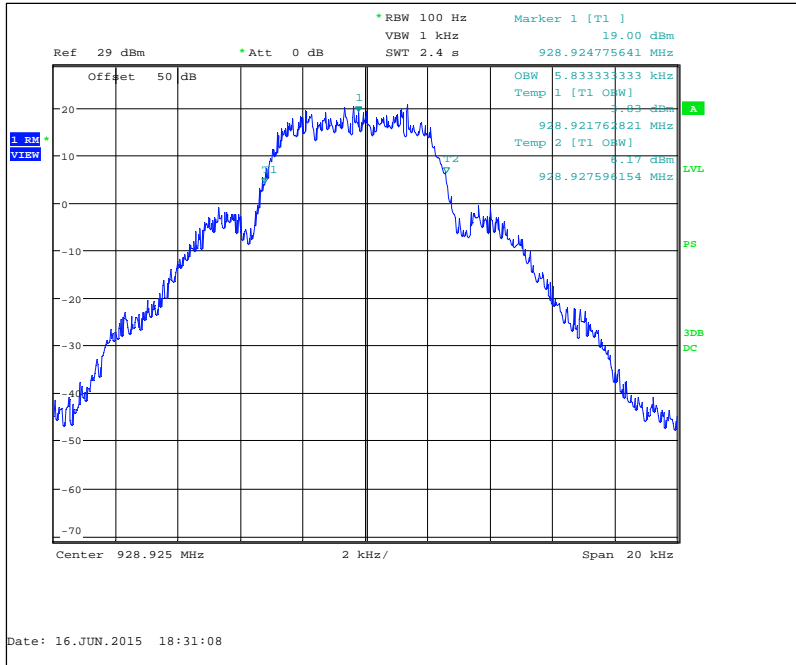


Figure 7.2.3-13: 928.925 MHz – mPass 5k Mode

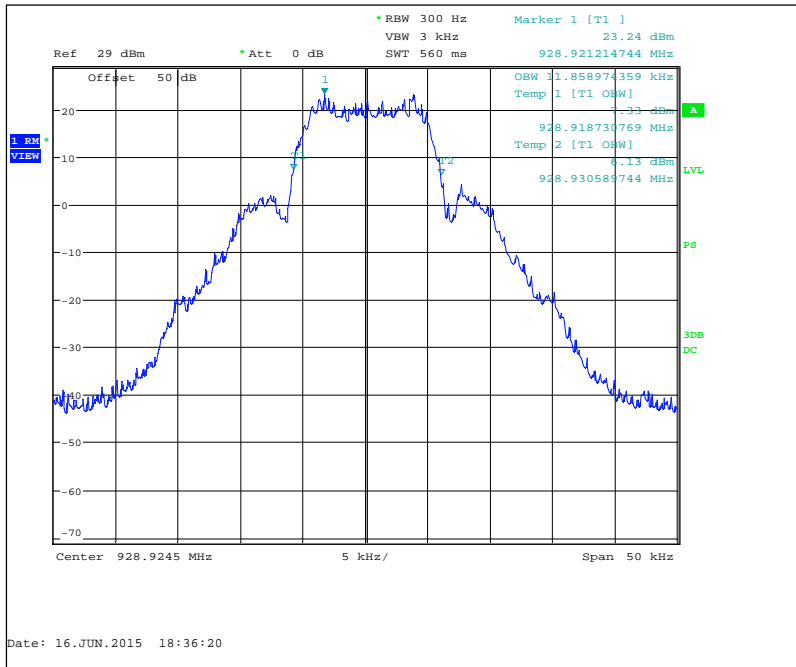


Figure 7.2.3-14: 928.925 MHz – mPass 10k Mode

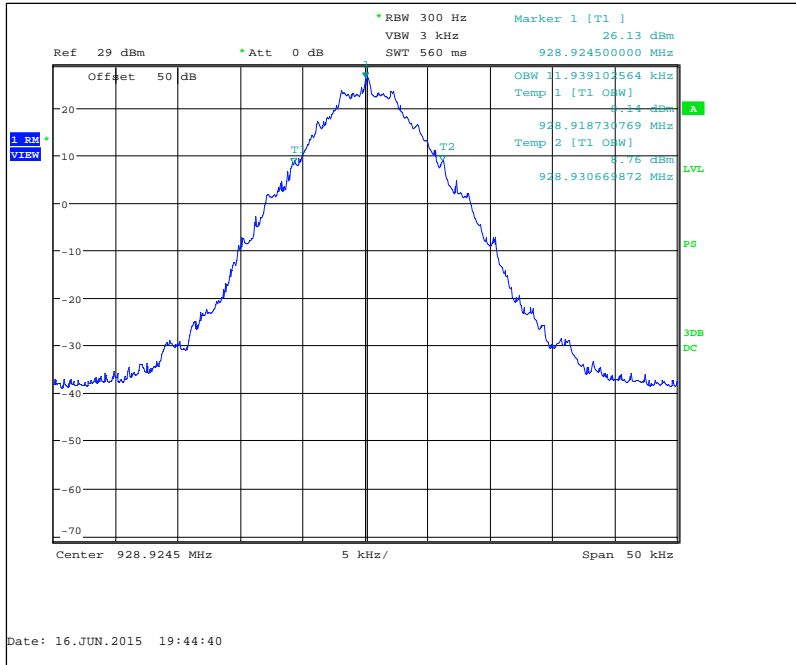


Figure 7.2.3-15: 928.925 MHz – Normal Mode

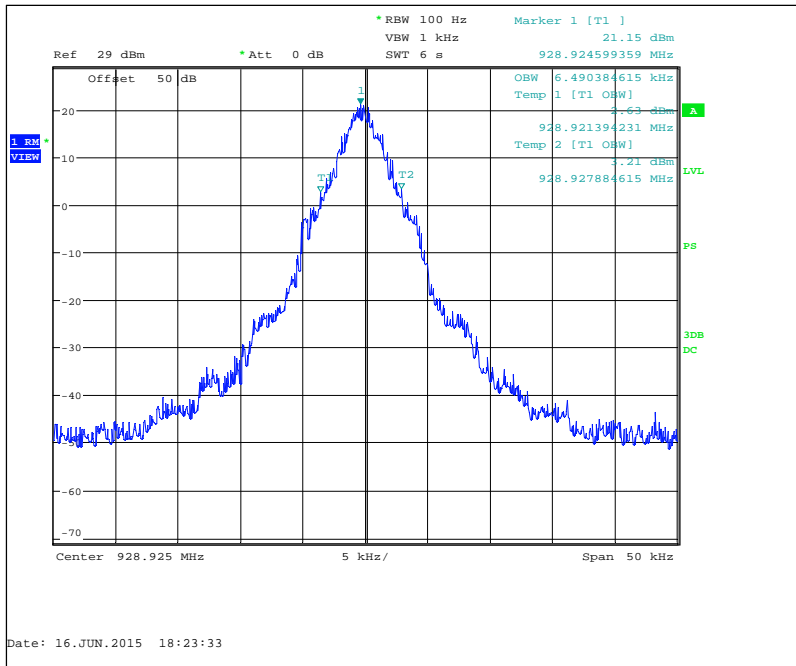


Figure 7.2.3-16: 928.925 MHz — Priority Mode

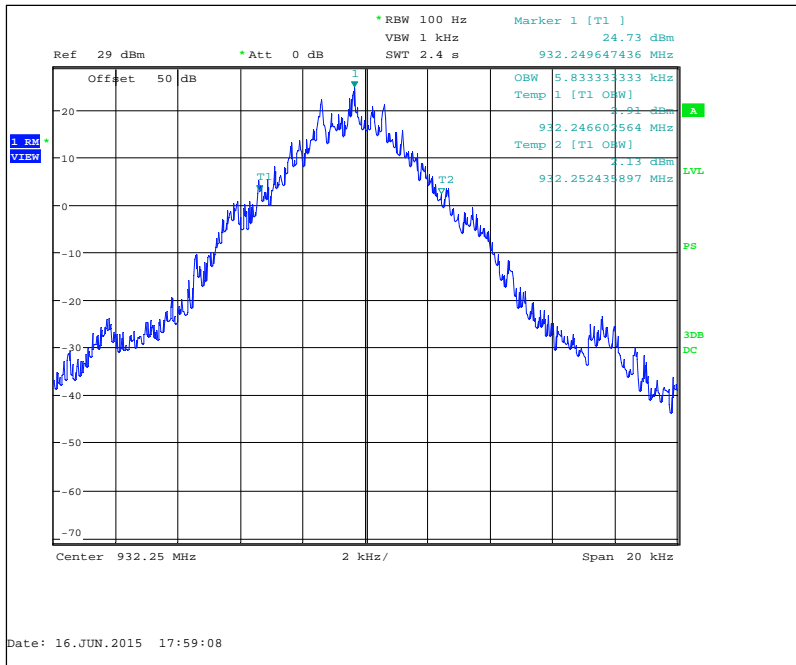


Figure 7.2.3-17: 932.25 MHz – C&I Mode

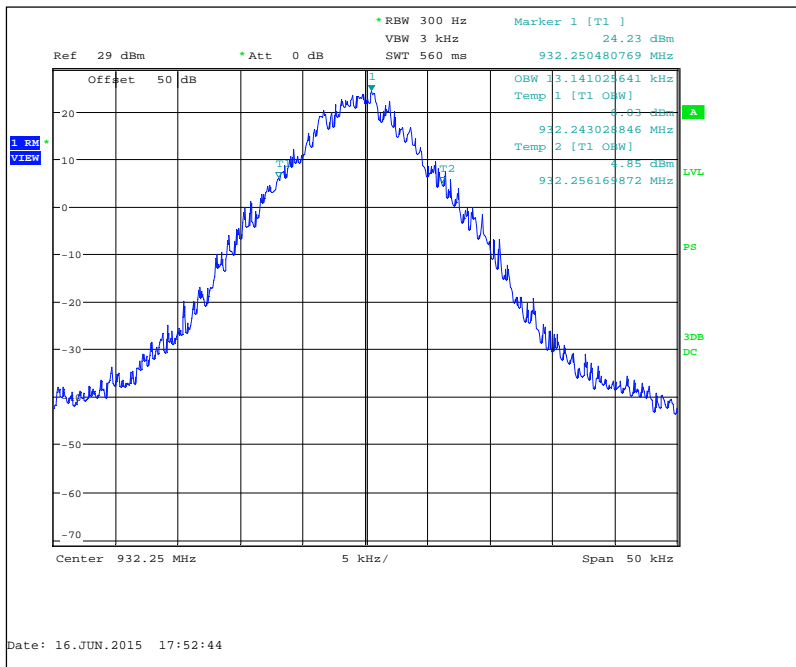


Figure 7.2.3-18: 932.25 MHz – Double Density Mode



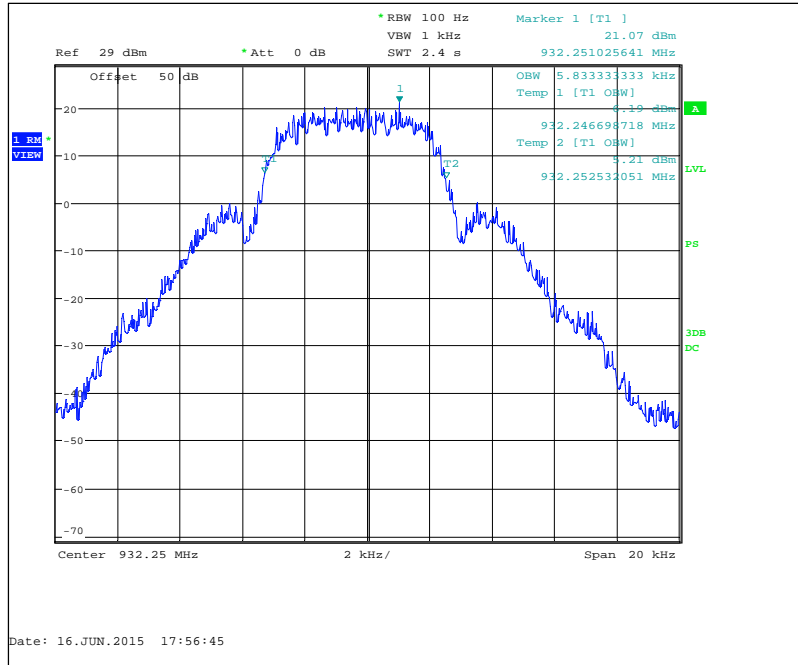


Figure 7.2.3-19: 932.25 MHz – mPass 5k Mode

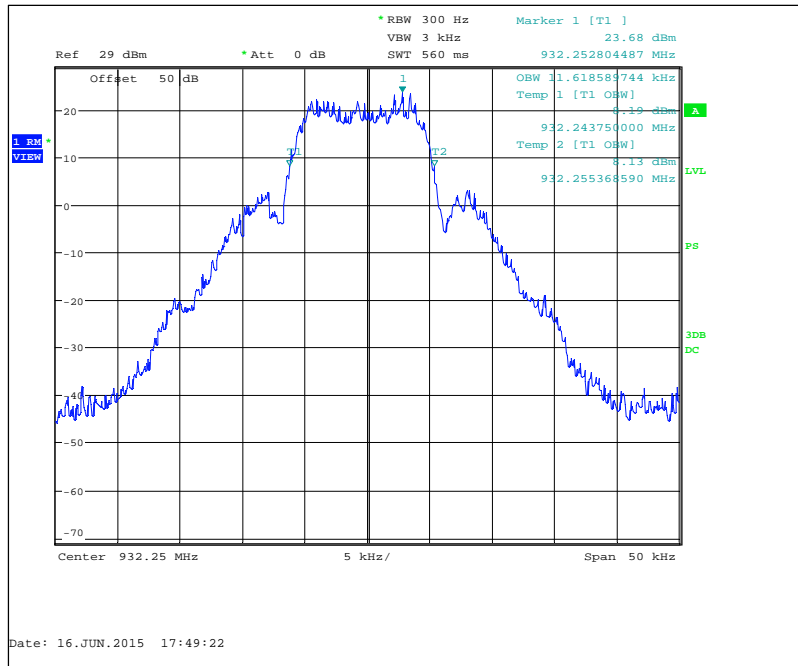


Figure 7.2.3-20: 932.25 MHz – mPass 10k Mode

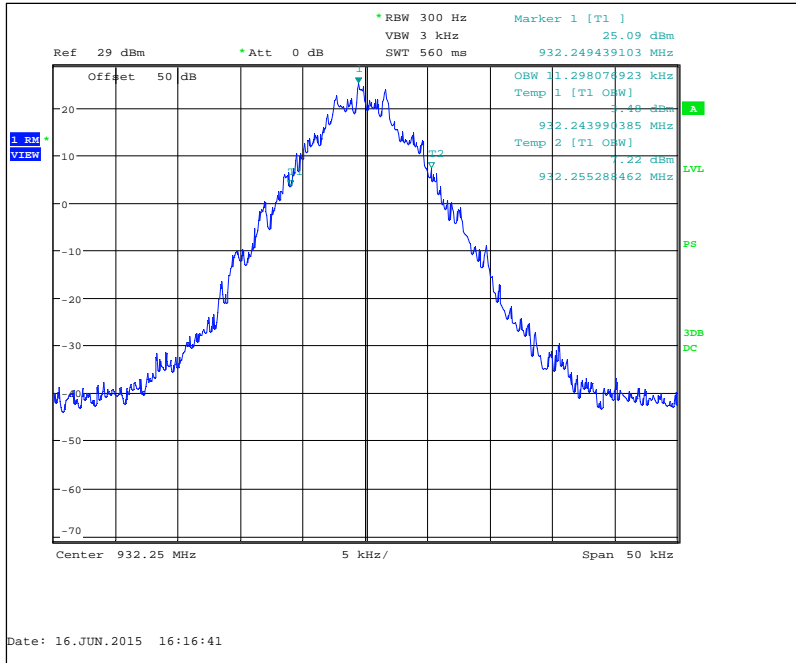


Figure 7.2.3-21: 932.25 MHz – Normal Mode

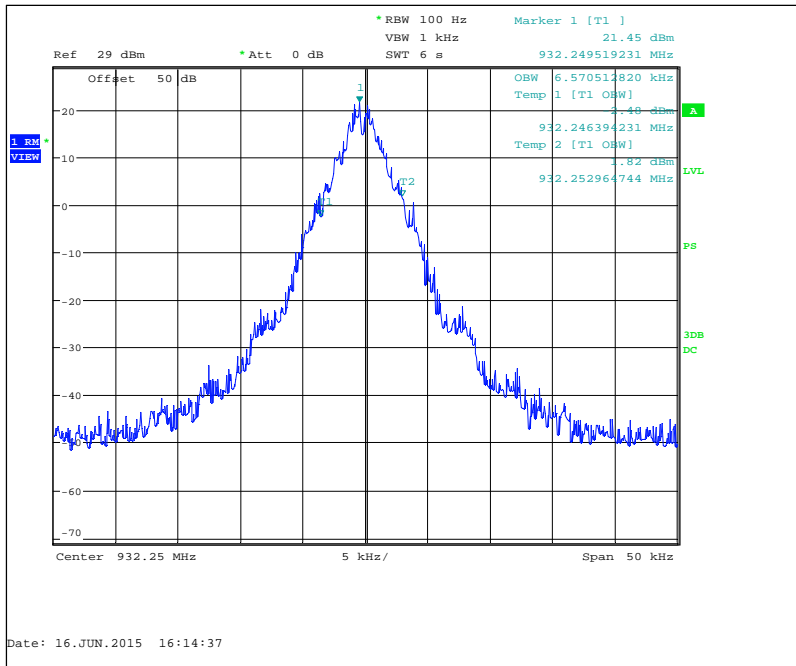


Figure 7.2.3-22: 932.25 MHz — Priority Mode



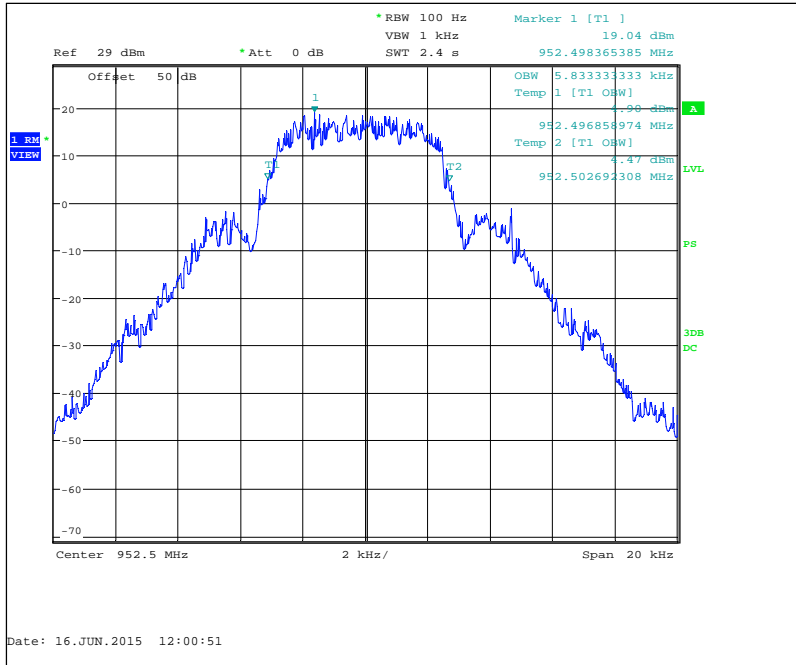


Figure 7.2.3-25: 952.5 MHz – mPass 5k Mode

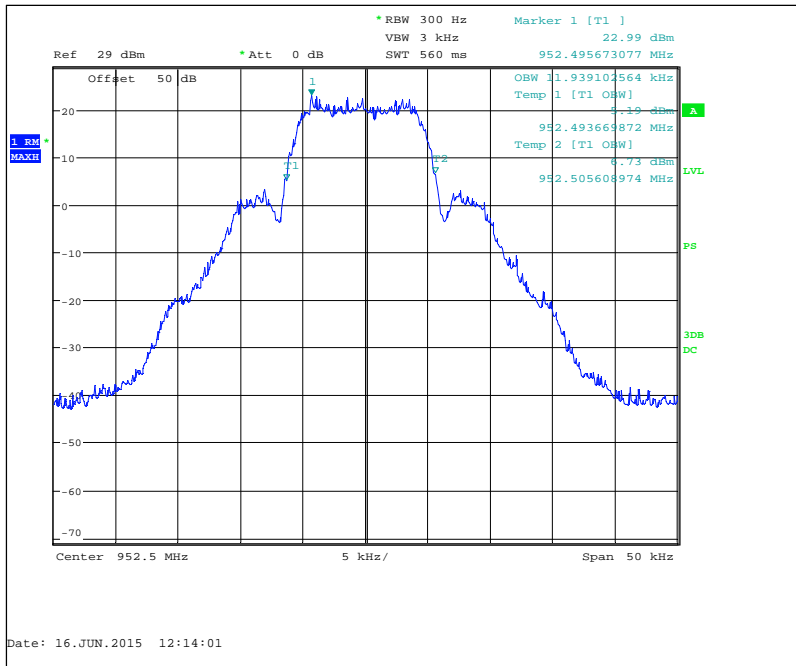


Figure 7.2.3-26: 952.5 MHz – mPass 10k Mode

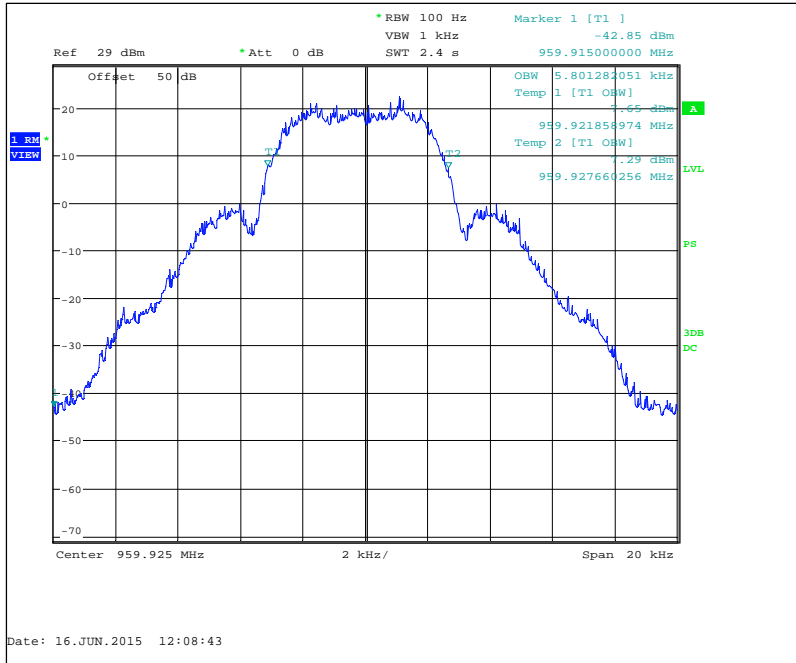


Figure 7.2.3-27: 959.925 MHz – mPass 5k Mode

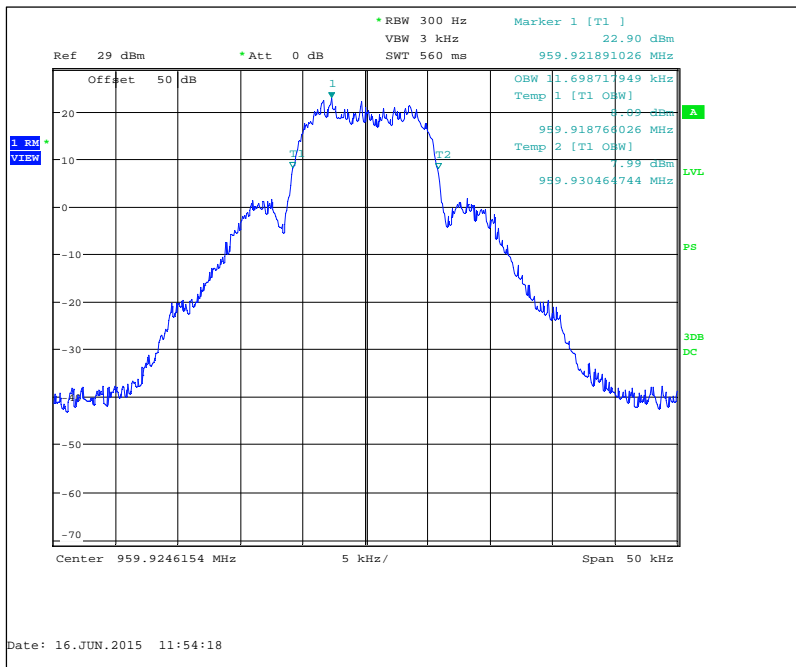


Figure 7.2.3-28: 959.925 MHz – mPass 10k Mode

### 7.3 Spurious Emissions at Antenna Terminals

#### 7.3.1 Measurement Procedure

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer through a 50 dB passive attenuation. The spectrum analyzer resolution bandwidth was set to 100 kHz below 1000 MHz and 1 MHz above 1000 MHz. The internal correction factors of the spectrum analyzer were employed to correct for any cable, attenuator or filter losses. The spectrum was investigated in accordance to CFR 47 Part 2.1057. Results are shown below.

#### 7.3.2 Measurement Results

##### Part 24.133 a(1), a(2), IC RSS-134 6.3(i), (ii)

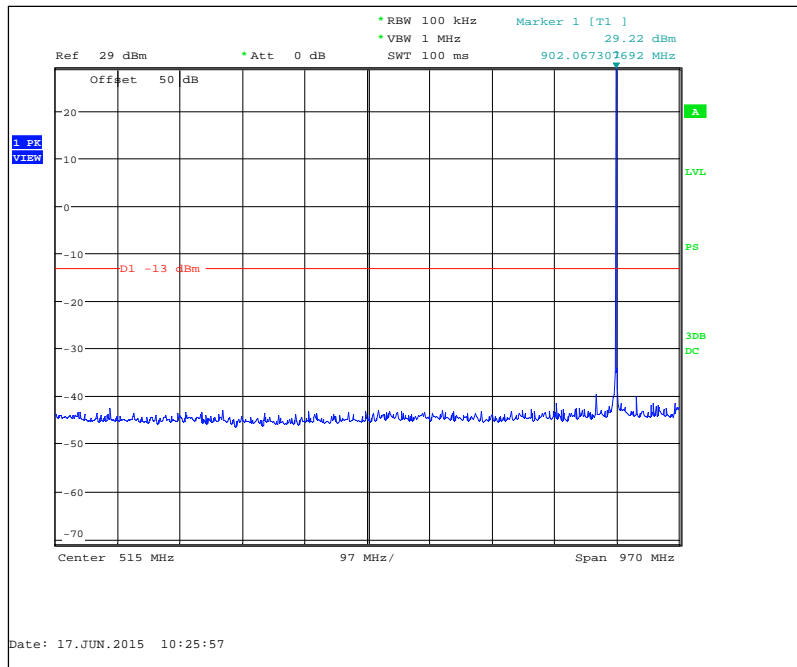


Figure 7.3.2-1: 901.5 MHz – 30MHz to 1GHz

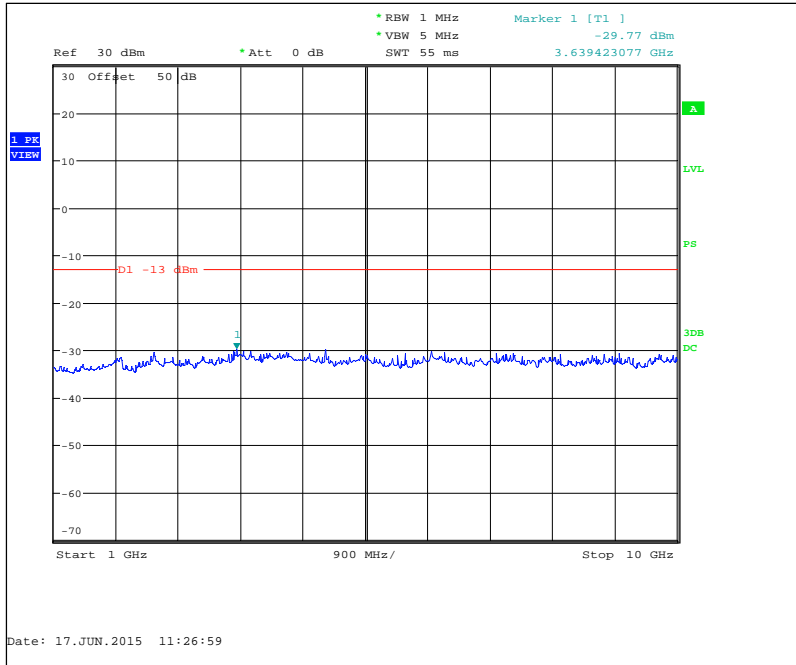


Figure 7.3.2-2: 901.5 MHz – 1GHz to 10GHz

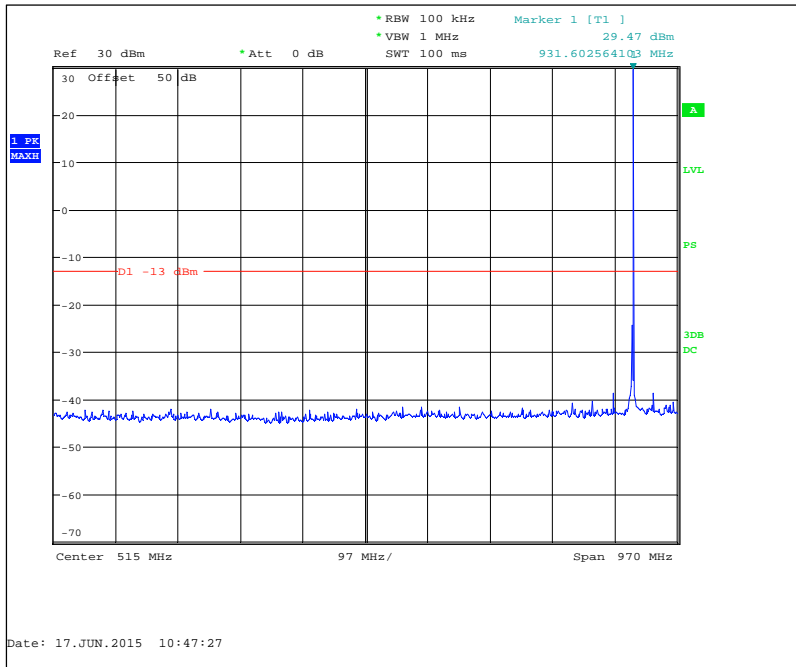


Figure 7.3.2-3: 930.5 MHz – 30MHz to 1GHz

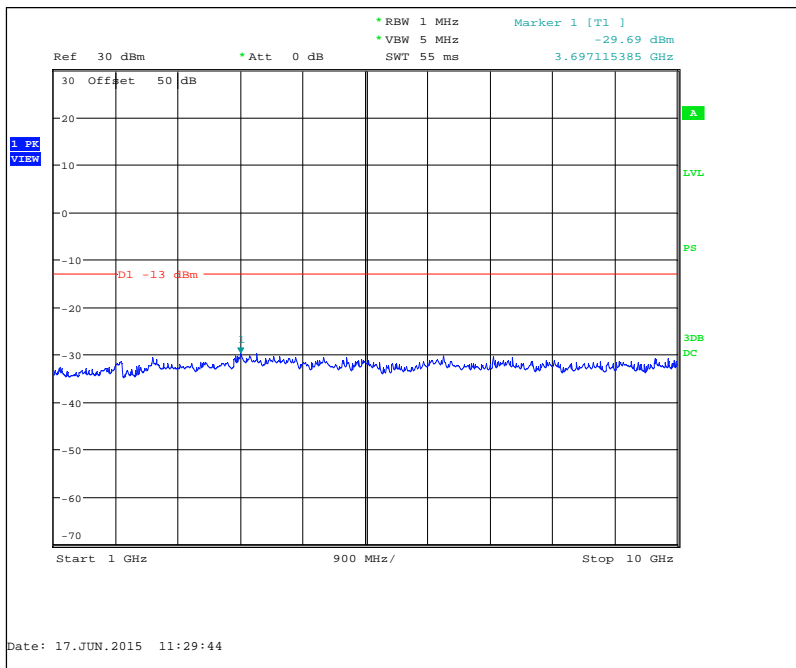


Figure 7.3.2-4: 930.5 MHz – 1GHz to 10GHz



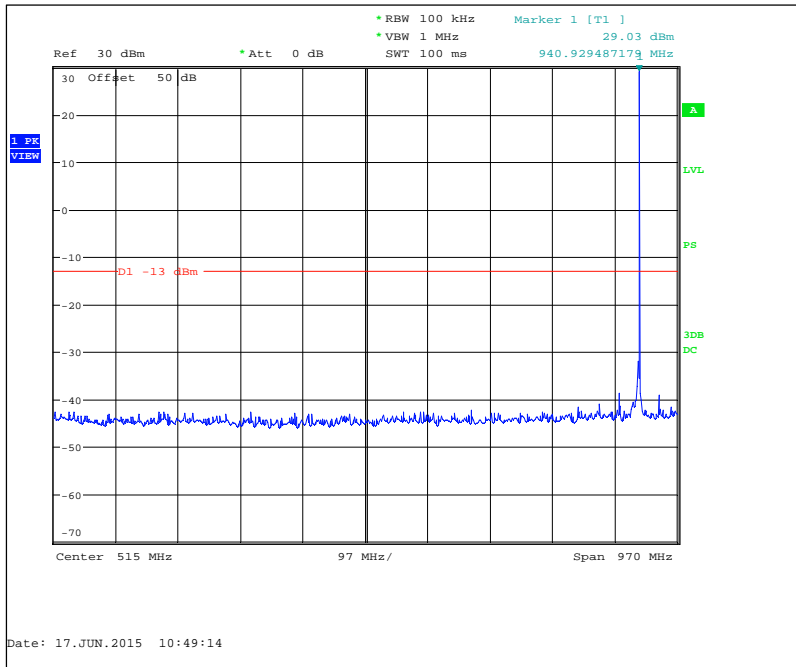


Figure 7.3.2-5: 940.0125 MHz – 30MHz to 1GHz

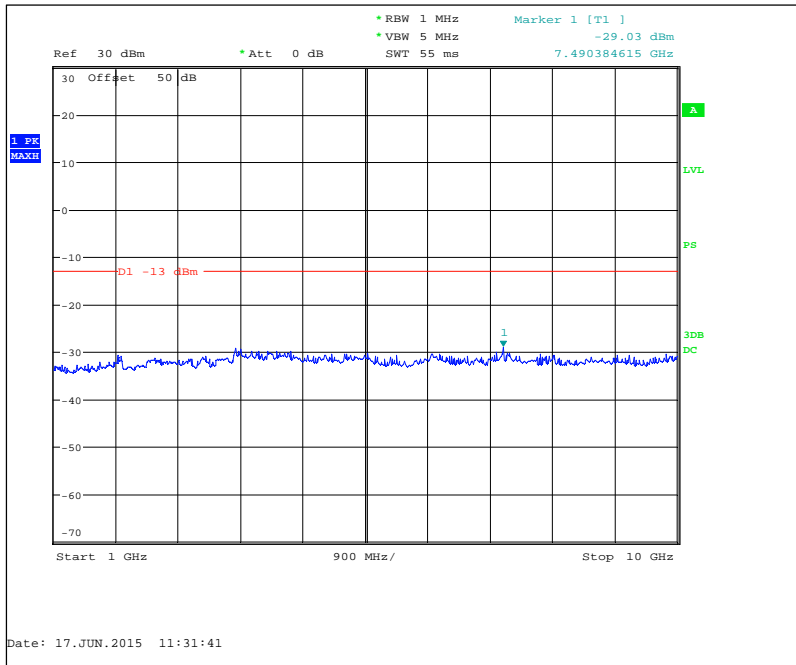


Figure 7.3.2-6: 940.0125 MHz – 1GHz to 10GHz

Part 101.111 a(6), RSS-119 5.8.6

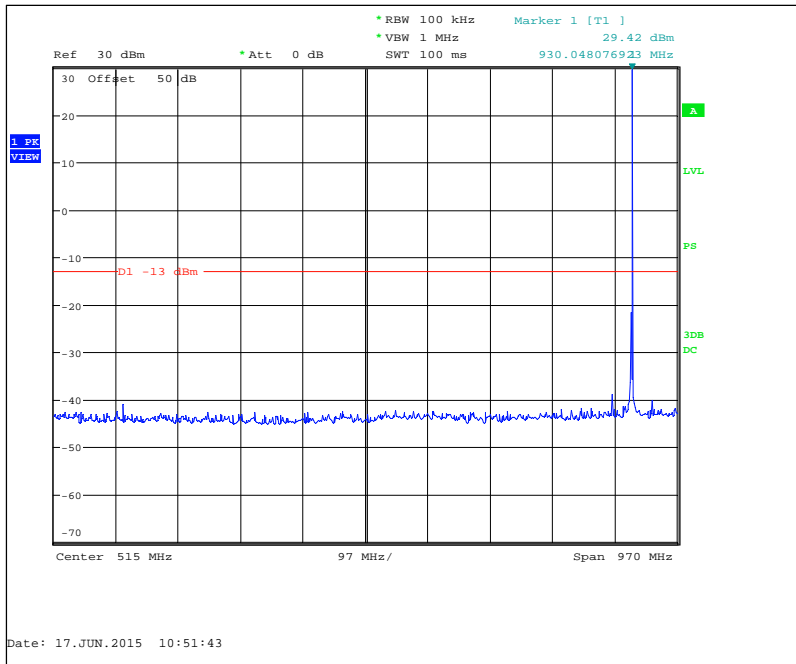


Figure 7.3.2-7: 928.925 MHz – 30MHz to 1GHz

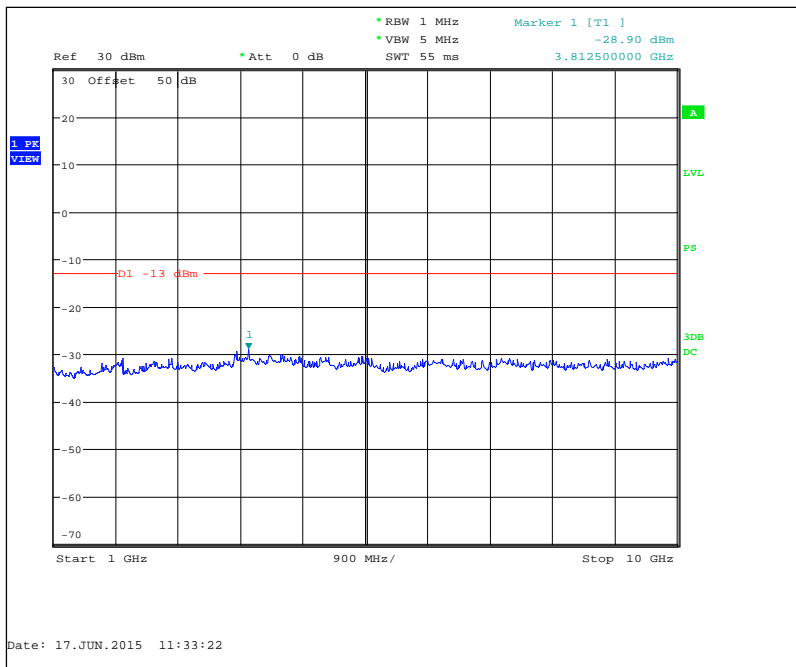


Figure 7.3.2-8: 928.925 MHz – 1GHz to 10GHz

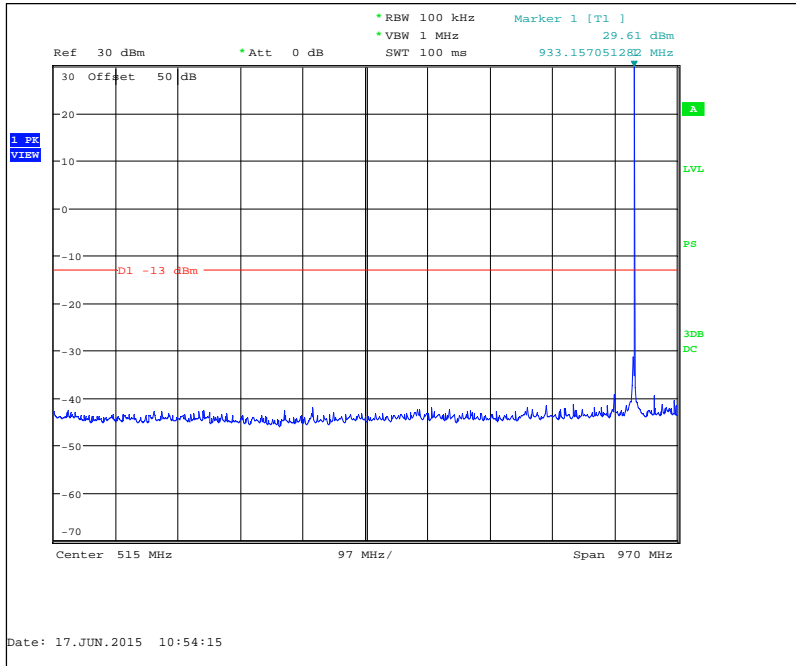


Figure 7.3.2-9: 932.25 MHz – 30MHz to 1GHz

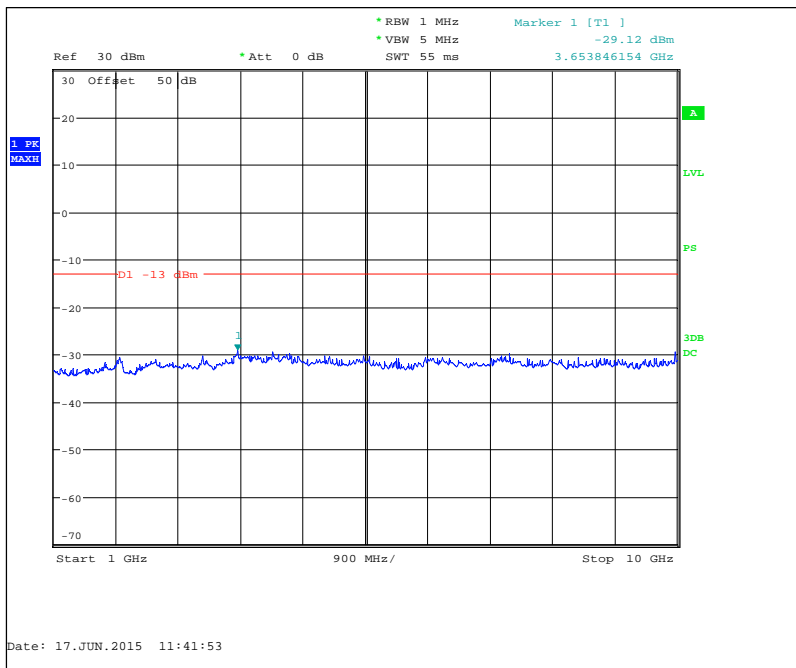


Figure 7.3.2-10: 932.25 MHz – 1GHz to 10GHz

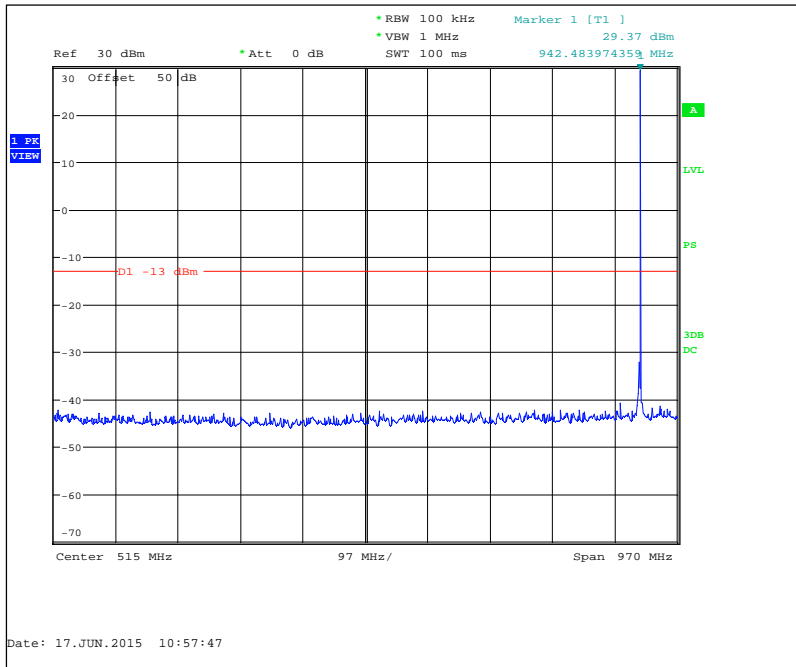


Figure 7.3.2-11: 941.4875 MHz – 30MHz to 1GHz

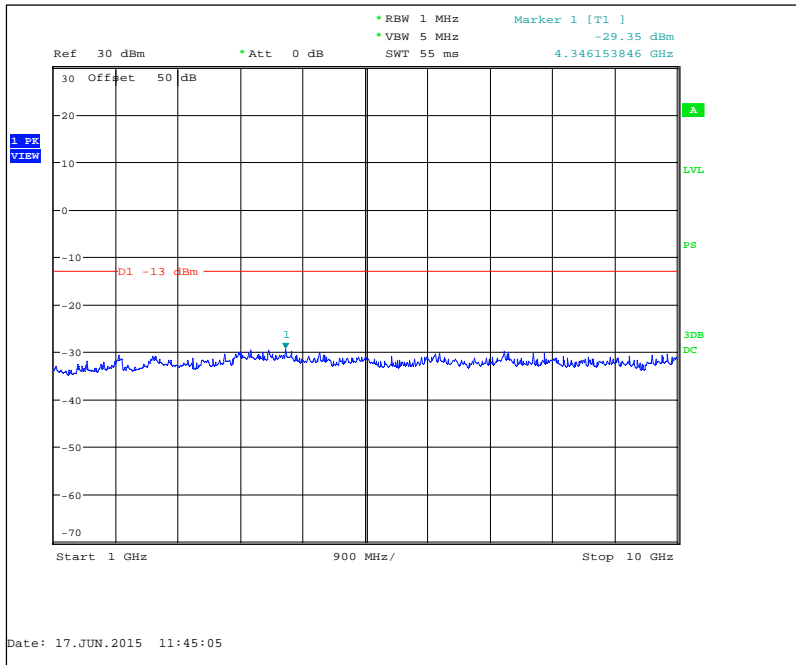


Figure 7.3.2-12: 941.4875 MHz – 1GHz to 10GHz

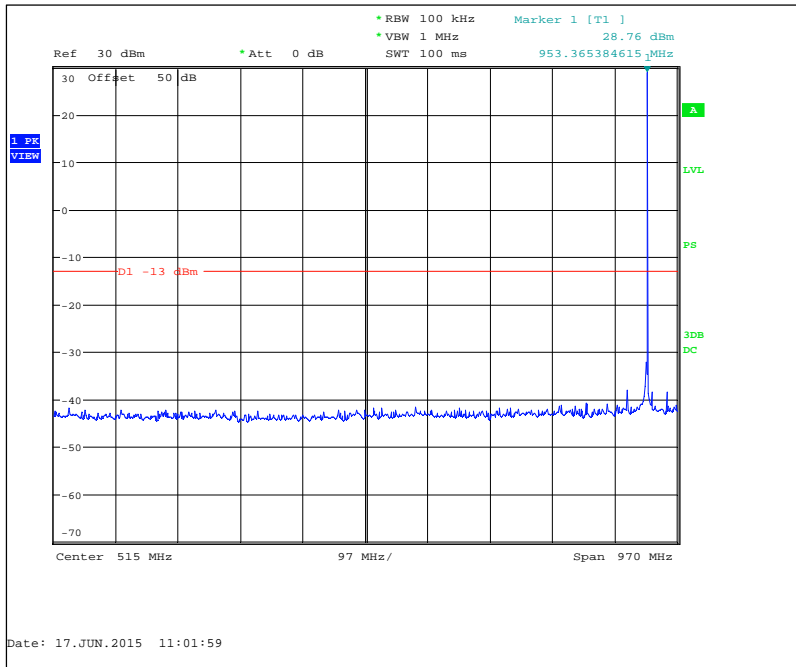


Figure 7.3.2-13: 952.5 MHz – 30MHz to 1GHz

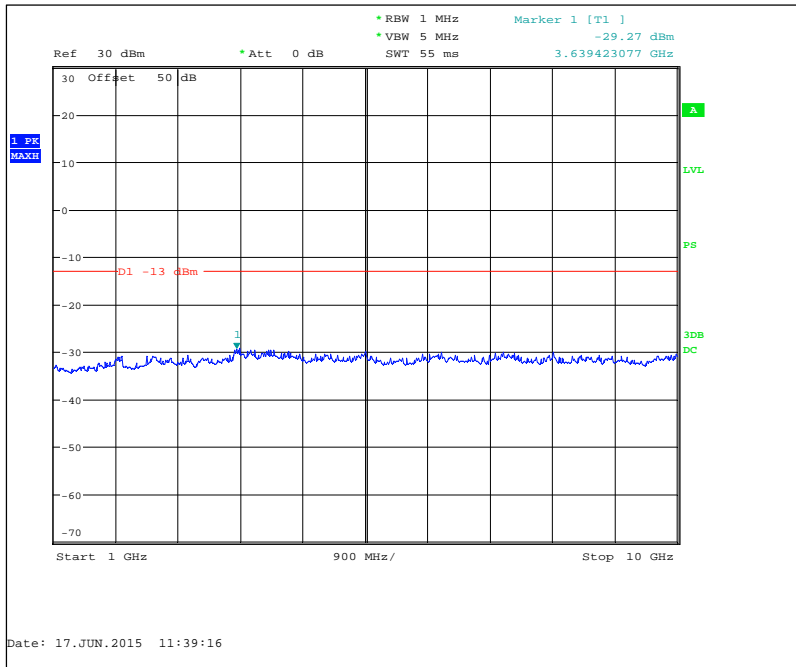


Figure 7.3.2-14: 952.5 MHz – 1GHz to 10GHz

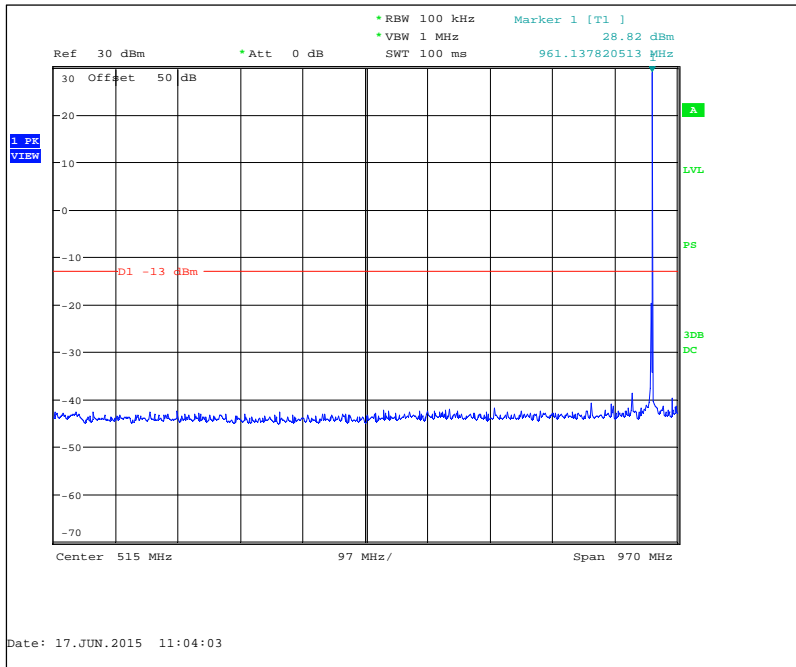


Figure 7.3.2-15: 959.925 MHz – 30MHz to 1GHz

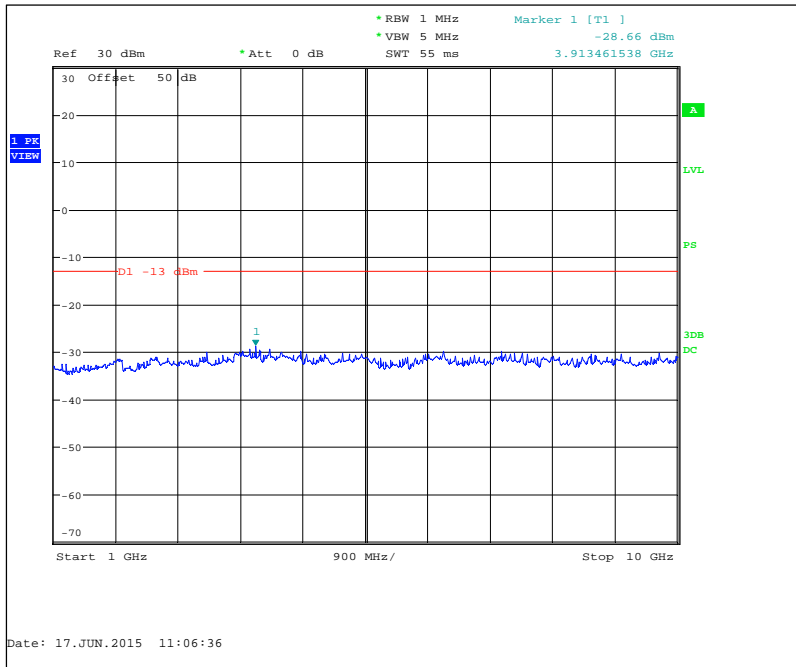


Figure 7.3.2-16: 959.925 MHz – 1GHz to 10GHz

## 7.4 Field Strength of Spurious Emissions

### 7.4.1 Measurement Procedure

The equipment under test is placed in the Semi-Anechoic Chamber (described in section 2.3.1) on a table at the turntable center. For each spurious emission, the antenna mast is raised and lowered from one (1) to four (4) meters and the turntable is rotated 360° and the maximum reading on the spectrum analyzer is recorded. This was repeated for both horizontal and vertical polarizations of the receive antenna.

The equipment under test is then replaced with a substitution antenna fed by a signal generator. The signal generator's frequency is set to that of the spurious emission recorded from the equipment under test. The antenna mast is raised and lowered from one (1) to four (4) meters to obtain a maximum reading on the spectrum analyzer. The output of the signal generator is then adjusted until the reading on the spectrum analyzer matches that obtained from the equipment under test. The signal generator level is recorded. The power in dBm of each spurious emission is calculated by correcting the signal generator level for the cable loss and gain of the substitution antenna referenced to a dipole. The spectrum was investigated in accordance to CFR 47 Part 2.1057.

The magnitude of all spurious emissions not reported were attenuated below the noise floor of the measurement system and therefore not specified in this report. Results are shown below.

### 7.4.2 Measurement Results

#### Part 24.133 a(1), a(2), RSS-134 6.3(i), (ii)

**Table 7.4.2-1: Field Strength of Spurious Emissions – 901.5 MHz – Normal Mode**

Frequency (MHz)	Spectrum Analyzer Level (dB $\mu$ V/m)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1803	74.60	H	-25.70	-13.00	12.70
1803	78.8	V	-21.70	-13.00	8.70
2704.5	58.9	H	-40.30	-13.00	27.30
2704.5	57.7	V	-42.30	-13.00	29.30
3606	55.4	H	-40.69	-13.00	27.69
3606	51.2	V	-46.69	-13.00	33.69
4507.5	52	H	-42.40	-13.00	29.40
4507.5	51.5	V	-43.10	-13.00	30.10
5409	39.4	H	-44.30	-13.00	31.30
5409	39.7	V	-44.30	-13.00	31.30

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

**Table 7.4.2-2: Field Strength of Spurious Emissions – 930.5 MHz – mPass 5k Mode**

Frequency (MHz)	Spectrum Analyzer Level (dB $\mu$ V/m)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1861	69.40	H	-32.08	-13.00	19.08
1861	76.1	V	-24.88	-13.00	11.88
2791.5	60.6	H	-38.15	-13.00	25.15
2791.5	54.3	V	-45.85	-13.00	32.85
3722	55.5	H	-40.32	-13.00	27.32
3722	50.9	V	-46.52	-13.00	33.52
4652.5	52.6	H	-41.54	-13.00	28.54
4652.5	53	V	-41.44	-13.00	28.44

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

**Table 7.4.2-3: Field Strength of Spurious Emissions – 940.0125 MHz – mPass 5k Mode**

Frequency (MHz)	Spectrum Analyzer Level (dB $\mu$ V/m)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1880.025	73.30	H	-27.78	-13.00	14.78
1880.025	75.4	V	-25.68	-13.00	12.68
2820.0375	60.4	H	-38.94	-13.00	25.94
2820.0375	54.4	V	-45.54	-13.00	32.54
3760.05	54.7	H	-39.50	-13.00	26.50
3760.05	50.8	V	-44.60	-13.00	31.60
4700.0625	55.9	H	-37.11	-13.00	24.11
4700.0625	53.2	V	-41.31	-13.00	28.31

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.



**Part 101.111 a(6), RSS-119 5.8.6****Table 7.4.2-4: Field Strength of Spurious Emissions – 928.925 MHz – Normal Mode**

Frequency (MHz)	Spectrum Analyzer Level (dB $\mu$ V/m)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1857.85	72.80	H	-28.59	-13.00	15.59
1857.85	78.1	V	-21.79	-13.00	8.79
2786.775	60.3	H	-38.86	-13.00	25.86
2786.775	55.1	V	-44.86	-13.00	31.86
3715.7	54.9	H	-40.83	-13.00	27.83
3715.7	51.2	V	-45.33	-13.00	32.33
4644.625	55.4	H	-38.42	-13.00	25.42
4644.625	53.1	V	-40.72	-13.00	27.72

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

**Table 7.4.2-5: Field Strength of Spurious Emissions – 932.25 MHz – Normal Mode**

Frequency (MHz)	Spectrum Analyzer Level (dB $\mu$ V/m)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1864.5	73.10	H	-27.78	-13.00	14.78
1864.5	76.8	V	-23.68	-13.00	10.68
2796.75	60.6	H	-38.65	-13.00	25.65
2796.75	55.1	V	-44.85	-13.00	31.85
3729	56.6	H	-39.22	-13.00	26.22
3729	52.2	V	-44.52	-13.00	31.52
4661.25	52.8	H	-41.55	-13.00	28.55
4661.25	53.3	V	-40.95	-13.00	27.95

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Table 7.4.2-6: Field Strength of Spurious Emissions – 941.4875 MHz – mPass 5k Mode

Frequency (MHz)	Spectrum Analyzer Level (dB $\mu$ V/m)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1882.975	70.70	H	-30.28	-13.00	17.28
1882.975	75.3	V	-25.78	-13.00	12.78
2824.4625	60.8	H	-38.53	-13.00	25.53
2824.4625	54.9	V	-45.03	-13.00	32.03
3765.95	55.2	H	-37.20	-13.00	24.20
3765.95	51.5	V	-44.20	-13.00	31.20
4707.4375	53.6	H	-37.52	-13.00	24.52
4707.4375	52.4	V	-42.22	-13.00	29.22

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Table 7.4.2-7: Field Strength of Spurious Emissions – 952.5 MHz – mPass 5k Mode

Frequency (MHz)	Spectrum Analyzer Level (dB $\mu$ V/m)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1905	70.50	H	-30.08	-13.00	17.08
1905	73.9	V	-26.48	-13.00	13.48
2857.5	60.6	H	-38.42	-13.00	25.42
2857.5	60.7	V	-38.62	-13.00	25.62
3810	54.2	H	-40.37	-13.00	27.37
3810	51.8	V	-43.57	-13.00	30.57
4762.5	54.9	H	-38.31	-13.00	25.31
4762.5	53.5	V	-40.31	-13.00	27.31

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

**Table 7.4.2-8: Field Strength of Spurious Emissions – 959.925 MHz – mPass 5k Mode**

Frequency (MHz)	Spectrum Analyzer Level (dB $\mu$ V/m)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1919.85	70.40	H	-31.37	-13.00	18.37
1919.85	71.3	V	-29.87	-13.00	16.87
2879.775	60.3	H	-39.10	-13.00	26.10
2879.775	53.5	V	-46.50	-13.00	33.50
3839.7	52.7	H	-43.06	-13.00	30.06
3839.7	51.3	V	-44.96	-13.00	31.96
4799.625	55.6	H	-37.77	-13.00	24.77
4799.625	55.3	V	-39.07	-13.00	26.07

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

## **7.5 Frequency Stability**

### **7.5.1 Measurement Procedure**

The equipment under test is placed inside an environmental chamber. The RF output is directly coupled to the input of the measurement equipment and a power supply is attached to the primary supply voltage.

Frequency measurements were made at the extremes of the of temperature range  $-30^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  and at intervals of  $10^{\circ}\text{C}$  at normal supply voltage. A period of time sufficient to stabilize all components of the equipment was allowed at each frequency measurement. The equipment can operate at voltages from 120 to 277 Vac. The equipment under test at a temperature of  $20^{\circ}\text{C}$  the measurements were performed at  $\pm 15\%$  of 120Vac and at 300Vac at the client's request. The maximum variation of frequency was recorded.

Results of the test are shown below.

7.5.2 Measurement Results

Part 24.135, RSS-134 (7)

<b>Frequency Stability</b>				
		Frequency (MHz):	901.5	
		Deviation Limit (PPM):	1.0ppm	
Temperature	Frequency	Frequency Error	Voltage	Voltage
C	MHz	(PPM)	(%)	(VDC)
-30 C	901.499808	-0.213	100%	120.00
-20 C	901.499840	-0.177	100%	120.00
-10 C	901.499905	-0.105	100%	120.00
0 C	901.499956	-0.049	100%	120.00
10 C	901.499857	-0.159	100%	120.00
20 C	901.499759	-0.267	100%	120.00
30 C	901.499739	-0.290	100%	120.00
40 C	901.499804	-0.217	100%	120.00
50 C	901.499846	-0.171	100%	120.00
20 C	901.499713	-0.318	85%	102.00
20 C	901.499715	-0.316	115%	138.00
20 C	901.499720	-0.311	250%	300.00

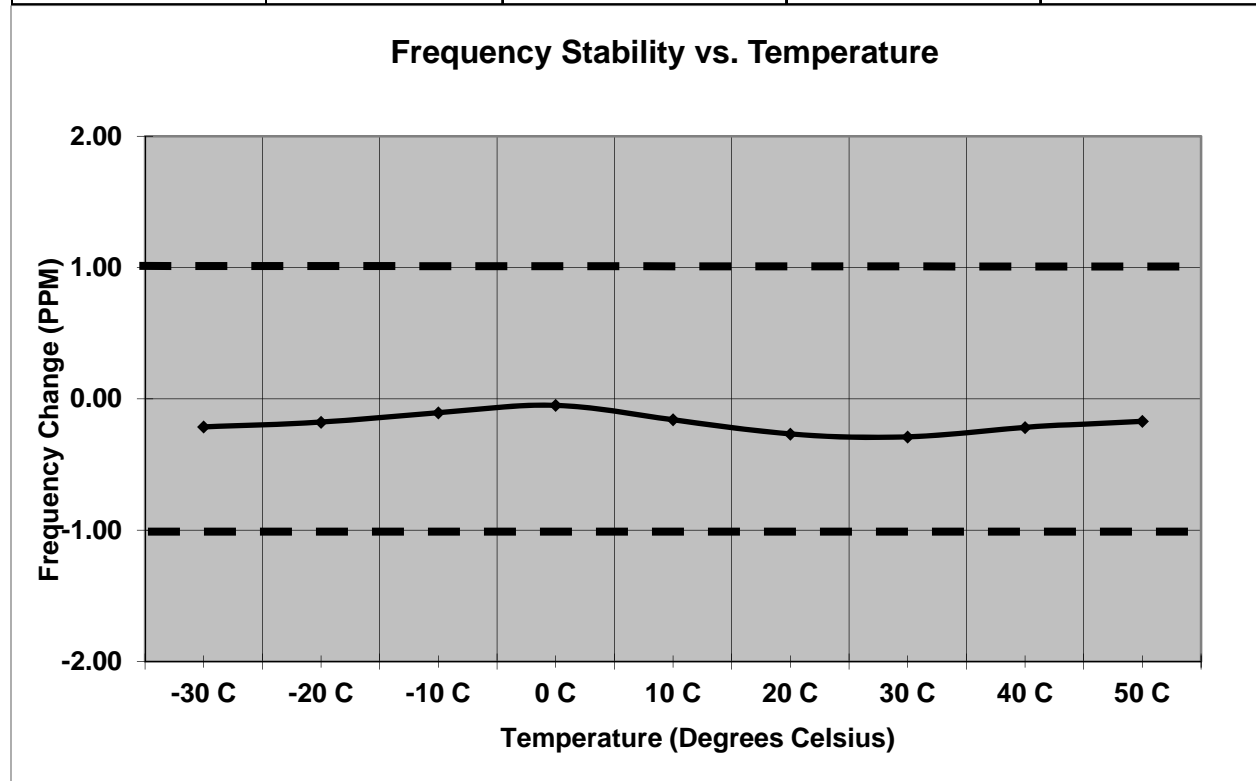


Figure 7.5.2-1: Frequency Stability – 901.5 MHz - KDS

Part 24.135, RSS-134 (7)

# Frequency Stability

Frequency (MHz): 930.5

Deviation Limit (PPM): 1.0ppm

Temperature	Frequency	Frequency Error	Voltage	Voltage
C	MHz	(PPM)	(%)	(VDC)
-30 C	930.499775	-0.242	100%	120.00
-20 C	930.499804	-0.211	100%	120.00
-10 C	930.499860	-0.150	100%	120.00
0 C	930.499927	-0.078	100%	120.00
10 C	930.499867	-0.143	100%	120.00
20 C	930.499736	-0.284	100%	120.00
30 C	930.499716	-0.305	100%	120.00
40 C	930.499777	-0.240	100%	120.00
50 C	930.499809	-0.205	100%	120.00
20 C	930.499675	-0.349	85%	102.00
20 C			115%	
20 C	930.499686	-0.337	250%	300.00

Frequency Stability vs. Temperature

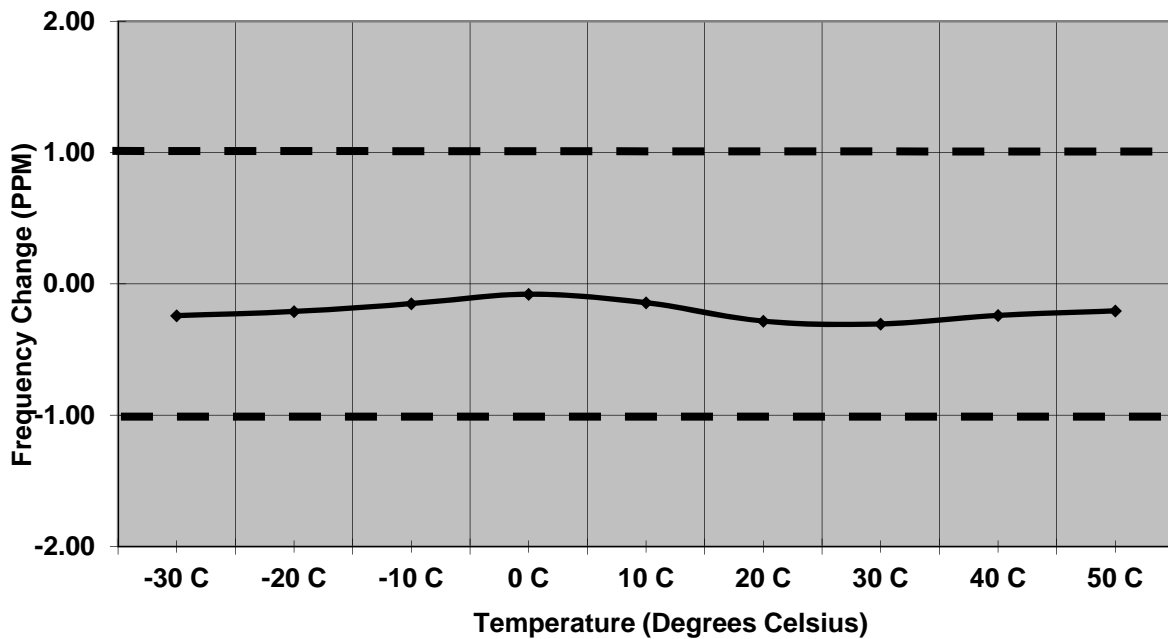


Figure 7.5.2-2: Frequency Stability – 930.5 MHz - KDS

Part 101.107, RSS-119 5.3

# Frequency Stability

Frequency (MHz): 959.925

Deviation Limit (PPM): 1.0ppm

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	959.924767	-0.243	100%	120.00
-20 C	959.924784	-0.225	100%	120.00
-10 C	959.924892	-0.113	100%	120.00
0 C	959.924939	-0.064	100%	120.00
10 C	959.924853	-0.153	100%	120.00
20 C	959.924755	-0.255	100%	120.00
30 C	959.924721	-0.291	100%	120.00
40 C	959.924761	-0.249	100%	120.00
50 C	959.924833	-0.174	100%	120.00
20 C	959.924692	-0.321	85%	102.00
20 C			115%	
20 C	959.924696	-0.317	250%	300.00

Frequency Stability vs. Temperature

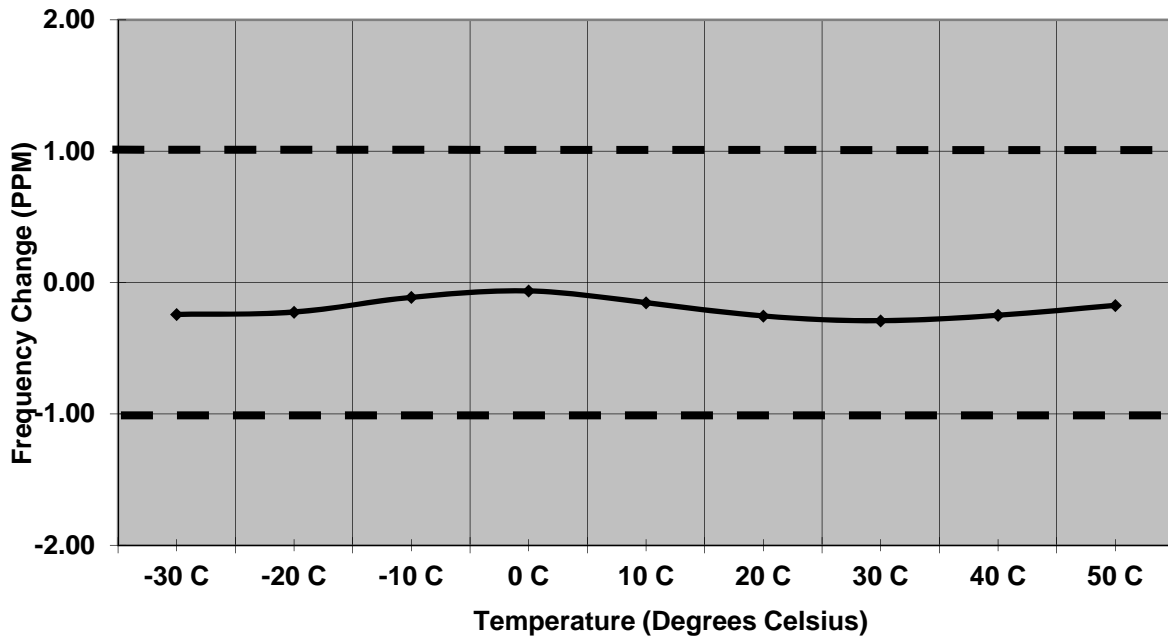


Figure 7.5.2-3: Frequency Stability – 959.925 MHz - KDS

**8.0 CONCLUSION**

In the opinion of ACS, Inc. the model SLCPIM, manufactured by Sensus Metering Systems, Inc., meets all the requirements of FCC Part 24D and Part 101 as well as Industry Canada RSS-119 and RSS-134 where applicable.

End Report