

## **Certification Test Report**

**FCC ID: SDBZIGELS01**  
**IC: 2220A-ZIGELS01**

**FCC Rule Part: 15.247**  
**IC Radio Standards Specification: RSS-210**

**ACS Report Number: 11-2108.W06.11.A**

**Manufacturer: Sensus Metering Systems, Inc.**  
**Model: ZIGELS01**

**Test Begin Date: November 19, 2011**  
**Test End Date: November 22, 2011**

**Report Issue Date: December 19, 2011**



FOR THE SCOPE OF ACCREDITATION UNDER CERTIFICATE NUMBER AT-1533

This report must not be used by the client to claim product certification, approval, or endorsement by ACCLASS, ANSI, or any agency of the Federal Government.

**Project Manager:**

A handwritten signature in black ink, appearing to read "Thierry Jean-Charles".

**Thierry Jean-Charles**  
**EMC Engineer**  
**Advanced Compliance Solutions, Inc.**

**Reviewed by:**

A handwritten signature in black ink, appearing to read "Kirby Munroe".

**Kirby Munroe**  
**Director, Wireless Certifications**  
**Advanced Compliance Solutions, Inc.**

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

**This report contains 32 pages**

## TABLE OF CONTENTS

<b>1</b>	<b>GENERAL .....</b>	<b>3</b>
1.1	Purpose .....	3
1.2	Product description .....	3
1.3	Test Methodology and Considerations .....	3
<b>2</b>	<b>TEST FACILITIES .....</b>	<b>4</b>
2.1	Location .....	4
2.2	Laboratory Accreditations/Recognitions/Certifications .....	4
2.3	Radiated & Conducted Emissions Test Site Description .....	5
<b>3</b>	<b>APPLICABLE STANDARD REFERENCES.....</b>	<b>7</b>
<b>4</b>	<b>LIST OF TEST EQUIPMENT.....</b>	<b>8</b>
<b>5</b>	<b>SUPPORT EQUIPMENT .....</b>	<b>9</b>
<b>6</b>	<b>EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM .....</b>	<b>9</b>
<b>7</b>	<b>SUMMARY OF TESTS.....</b>	<b>11</b>
7.1	Antenna Requirement – FCC: Section 15.203 .....	11
7.2	6 dB Bandwidth - FCC: Section 15.247(a)(2) IC: RSS-210 A8.2(a) .....	11
7.3	Peak Output Power - FCC Section 15.247(b)(3) IC: RSS-210 A8.4(4).....	15
7.4	Band-Edge Compliance and Spurious Emissions-FCC 15.247(d) IC:RSS-210 A8.5.....	17
7.5	Power Spectral Density - FCC Section 15.247(e) IC: RSS-210 A8.2(b) .....	27
7.6	Power Line Conducted Emissions – FCC: Section 15.207 IC: RSS-Gen 7.2.4.....	29
<b>8</b>	<b>CONCLUSION.....</b>	<b>32</b>

## 1 GENERAL

### 1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Industry Canada's Radio Standards Specification RSS-210 for a modular approval.

### 1.2 Product description

The ZIGELS01 ZigBee® module is a 2.4GHz O-QPSK radio transmitter and receiver which adhere to the IEEE 802.15.4 standard. The module can be installed within an Elster A3 electric meter with FlexNet to facilitate home-area-network (HAN) wireless communication capability. The ZigBee module when combined with a FlexNet module provides a utility with the means to communicate between a back-end system and individual devices connected to the HAN (eg in-premise display).

#### **Technical Information:**

Band of Operation: 2405 MHz - 2480 MHz

Number of Channels: 16

Modulation Format: O-QPSK

Antenna Type/Gain: Inverted F, 0 dBi

Operating Voltage: 13 VDC

#### **Manufacturer Information:**

Sensus Metering Systems, Inc.

639 Davis Drive

Morrisville, NC 27560

Test Sample Serial Number(s): 1D2301000164E4, 1D2301000164E8, 1D2301000164EA

Test Sample Condition: The test samples were provided in good working order with no visible defects.

### 1.3 Test Methodology and Considerations

For radiated emissions, including band edge, the EUT was evaluated in the orientation of typical installation. For the purpose of RF conducted measurements, the module was modified with a temporary 50 ohm SMA connector at the antenna port.

The power line conducted emissions evaluation were performed for the EUT inserted inside of an Elster meter which was acting as a host. The power line conducted emission results are reported for the configuration leading to the highest emissions.

The unintentional emissions evaluations are documented separately in a Verification Report.

## **2 TEST FACILITIES**

### **2.1 Location**

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions, Inc.  
3998 FAU Blvd, Suite 310  
Boca Raton, Florida 33431  
Phone: (561) 961-5585  
Fax: (561) 961-5587  
[www.acstestlab.com](http://www.acstestlab.com)

FCC Test Firm Registration #: 587595  
Industry Canada Lab Code: 4175C

### **2.2 Laboratory Accreditations/Recognitions/Certifications**

ACS is accredited to ISO/IEC 17025 by ANSI-ASQ National Accreditation Board under their ACLASS program and has been issued certificate number AT-1533 in recognition of this accreditation. Unless otherwise specified, all test methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

**2.3 Radiated & Conducted Emissions Test Site Description**

**2.3.1 Semi-Anechoic Chamber Test Site**


The EMC radiated test facility consists of an RF-shielded enclosure. The interior dimensions of the indoor semi-anechoic chamber are approximately 48 feet (14.6 m) long by 36 feet (10.8 m) wide by 24 feet (7.3 m) high and consist of rigid, 1/8 inch (0.32 cm) steel-clad, wood core modular panels with steel framing. In the shielded enclosure, the faces of the panels are galvanized and the chamber is self-supporting. 8-foot RF absorbing cones are installed on 4 walls and the ceiling. The steel-clad ground plane is covered with vinyl floor.

The turntable is driven by pneumatic motor, which is capable of supporting a 2000 lb. load. The turntable is flushed with the chamber floor which it is connected to, around its circumference, with a continuous metallic loaded spring. An EMCO Model 1050 Multi-device Controller controls the turntable position.

A pneumatic motor is used to control antenna polarizations and height relative to the ground. The height information is displayed on the control unit EMCO Model 1050.

The control room is an RF shielded enclosure attached to the semi-anechoic chamber with two bulkhead panels for connecting RF, and control cables. The dimension of the room is 7.3 m x 4.9 m x 3 m high and the entrance doors of both control and conducted rooms are 3 feet (0.91 m) by 7 feet (2.13 m).

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3.1-1 below:

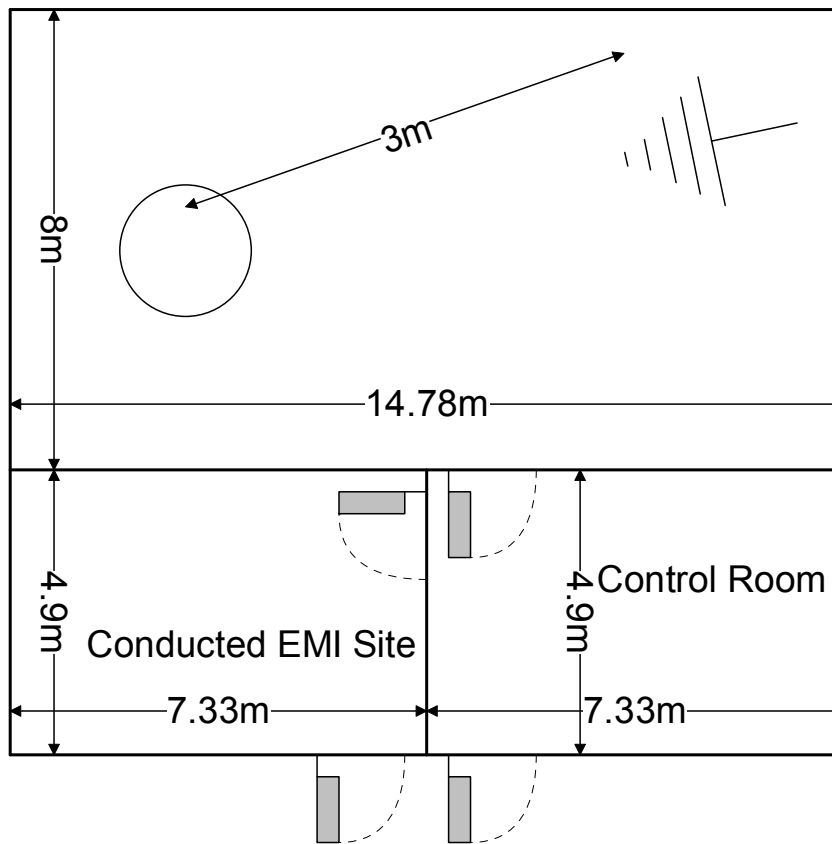


**Figure 2.3.1-1: Semi-Anechoic Chamber Test Site**

### 2.3.2 Conducted Emissions Test Site Description

The dimensions of the shielded conducted room are 7.3 x 4.9 x 3 m<sup>3</sup>. As per ANSI C63.4 2003 requirements, the data were taken using two LISNs; a Solar Model 8028-50 50 Ω/50 μH and an EMCO Model 3825, which are installed as shown in Photograph 3. For 220 V, 50 Hz, a Polarad LISN (S/N 879341/048) is used in conjunction with a 1 kVA, 50 Hz/220 V EDGAR variable frequency generator, Model 1001B, to filter conducted noise from the generator.

A diagram of the room is shown below in figure 2.3.2-1:

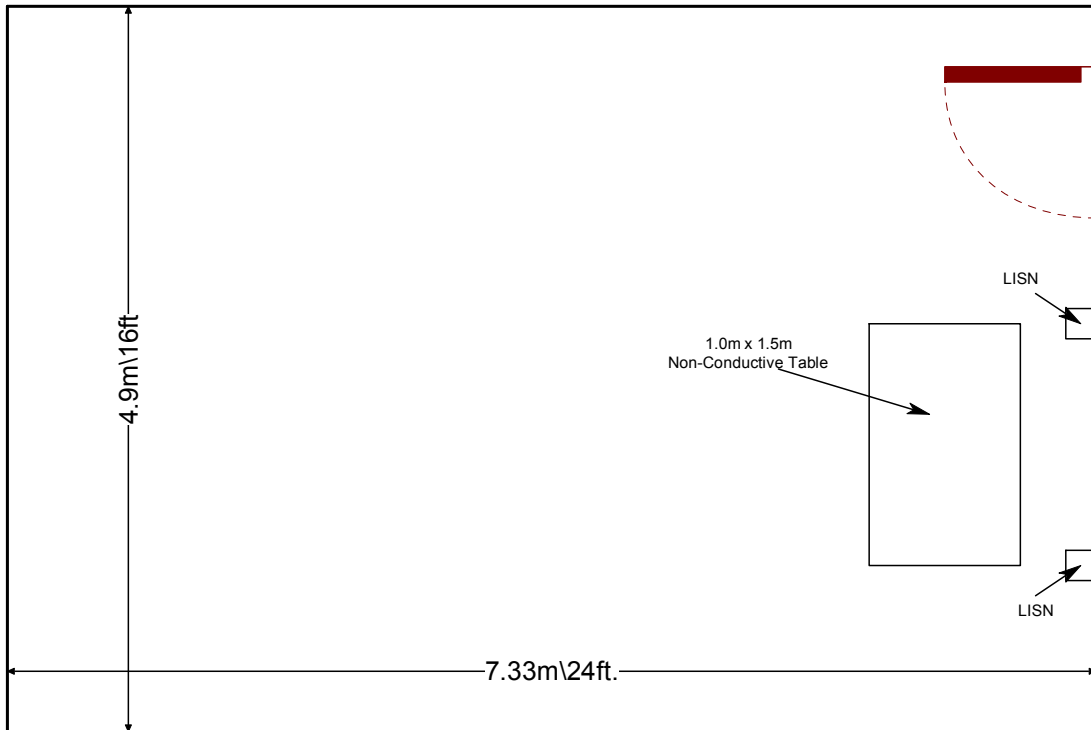

2.3.2-1: AC Mains Conducted EMI Site

Figure

### **3 APPLICABLE STANDARD REFERENCES**

The following standards were used:

- ❖ ANSI C63.4-2003: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9KHz to 40GHz
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2011
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2011
- ❖ KDB Publication No. 558074 - Measurement of Digital Transmission Systems Operating under Section 15.247, March 23, 2005
- ❖ Industry Canada Radio Standards Specification: RSS-210 - Low-power License-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, Issue 8, December 2010.
- ❖ Industry Canada Radio Standards Specification: RSS-GEN – General Requirements and Information for the Certification of Radiocommunication Equipment, Issue 3, December 2010.

#### 4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

**Table 4-1: Test Equipment**

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
523	Agilent	E7405	Spectrum Analyzers	MY45103293	1/5/2011	1/5/2013
524	Chase	CBL6111	Antennas	1138	1/7/2011	1/7/2013
2006	EMCO	3115	Antennas	2573	3/2/2011	3/2/2013
2008	COM-Power	AH-826	Antennas	81009	NCR	NCR
2044	QMI	N/A	Cables	2044	1/7/2011	1/7/2012
2070	Mini Circuits	VHF-8400+	Filter	2070	2/3/2011	2/3/2012
2072	Mini Circuits	VHF-3100+	Filter	30737	2/3/2011	2/3/2012
2075	Hewlett Packard	8495B	Attenuators	2626A11012	NCR	NCR
2076	Hewlett Packard	HP5061-5458	Cables	2076	2/2/2011	2/2/2012
2082	Teledyne Storm Products	90-010-048	Cables	2082	6/6/2011	6/6/2012
RE586	Agilent Technologies, Inc.	83017A	Amplifiers	3123A00168	9/23/2011	9/23/2012

**NCR=No Calibration Required**



5 SUPPORT EQUIPMENT

Table 5-1: Support Equipment – Radiated Emissions

Item	Equipment Type	Manufacturer	Model Number	Serial Number
1	DC Power Supply	MPJA	HY5003	003700278

Table 5-2: Support Equipment – Power Line Conducted Emissions

Item	Equipment Type	Manufacturer	Model Number	Serial Number
1	Electric Meter	Elster	ZD3W1000082-08 Type A3TL	13913333
2	Unenclosed Meter Socket	Brooks Ekstrom	Type 3R	N/A

6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

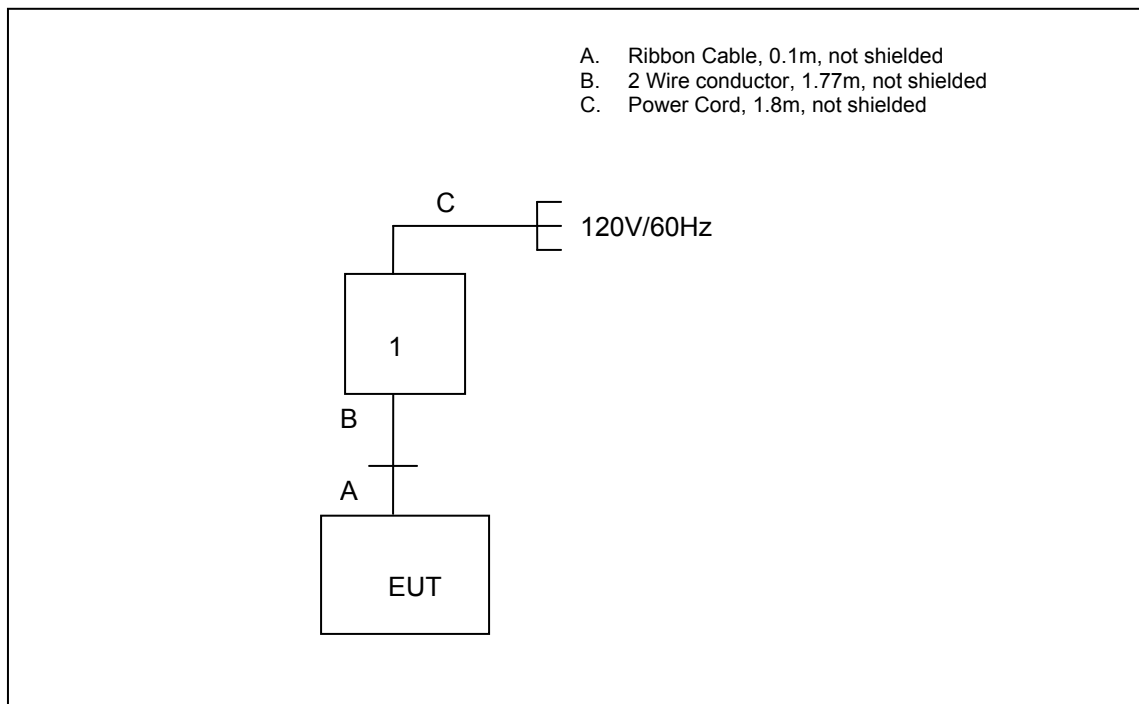


Figure 6-1: Test Setup – Radiated Emissions

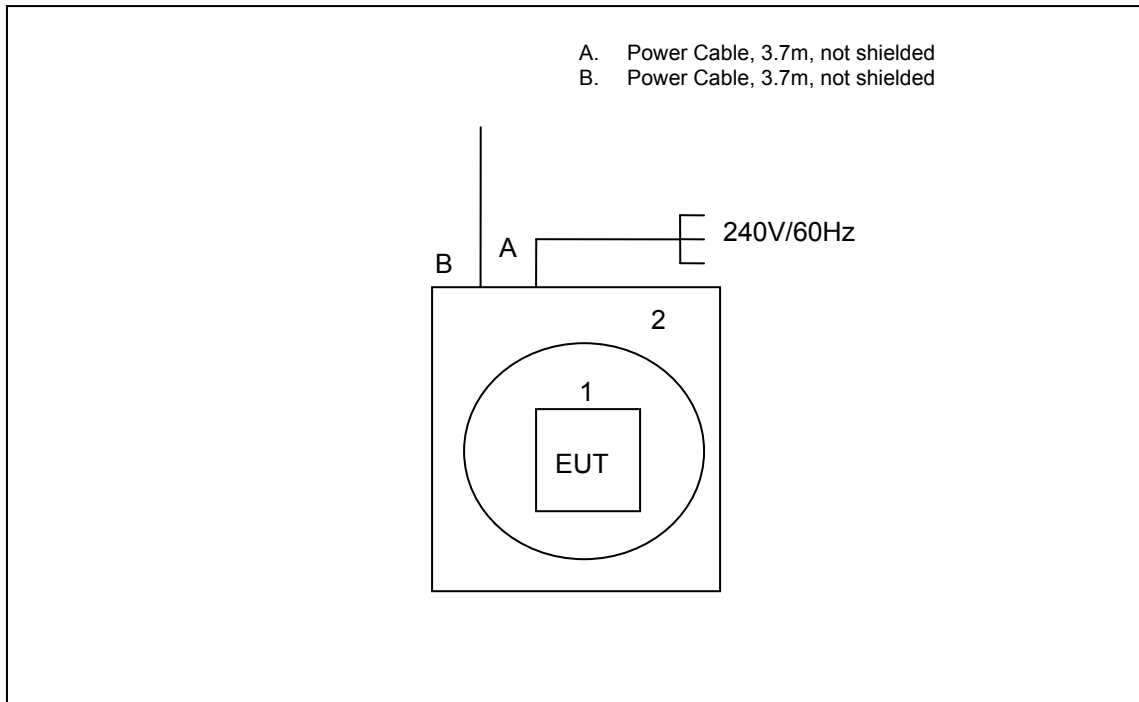


Figure 6-2: Test Setup – Power Line Conducted Emissions

**7 SUMMARY OF TESTS**

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

**7.1 Antenna Requirement – FCC: Section 15.203**

The ZIGELS01 uses an integrated 0 dBi inverted-F PCB antenna, thus meeting the requirements of 15.203.

**7.2 6 dB Bandwidth - FCC: Section 15.247(a)(2) IC: RSS-210 A8.2(a)**

**7.2.1 Measurement Procedure**


The 6dB bandwidth was measured in accordance with the FCC KDB Publication No. 558074 “Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247)”. The RBW of the spectrum analyzer was set to 100 kHz and VBW 300 kHz. Span was set large enough to capture the entire emissions and >> RBW.

**7.2.2 Measurement Results**

Results are shown below in Table 7.2.2-1 and Figures 7.2.2-1 through 7.2.2-6.

**Table 7.2.2-1: 6dB / 99% Bandwidth**

Frequency [MHz]	6dB Bandwidth [kHz]	99% Bandwidth (kHz)
2405	1630	2745
2440	1640	2635
2480	1625	2720

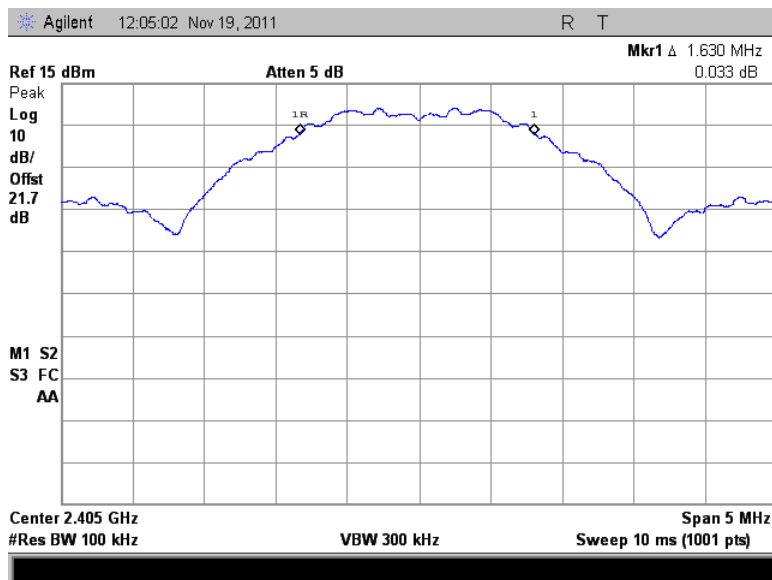

**Figure 7.2.2-1: 6dB BW - Low Channel**

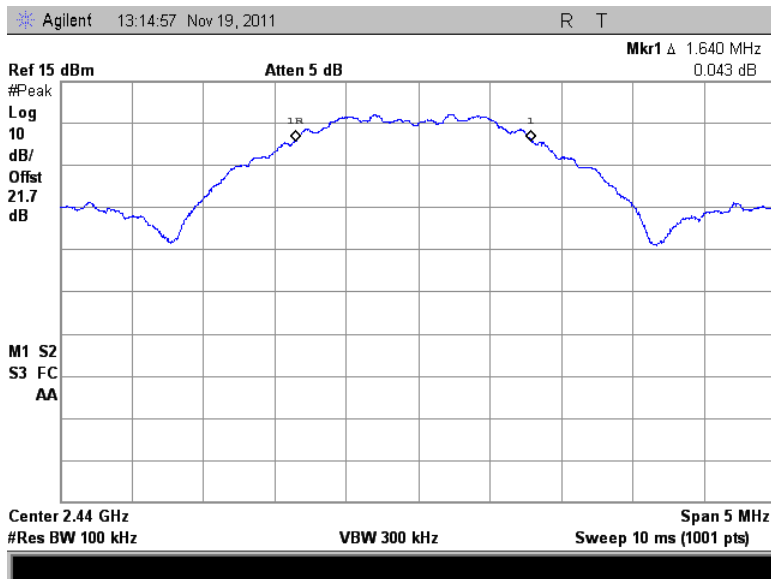


Figure 7.2.2-2: 6dB BW - Middle Channel

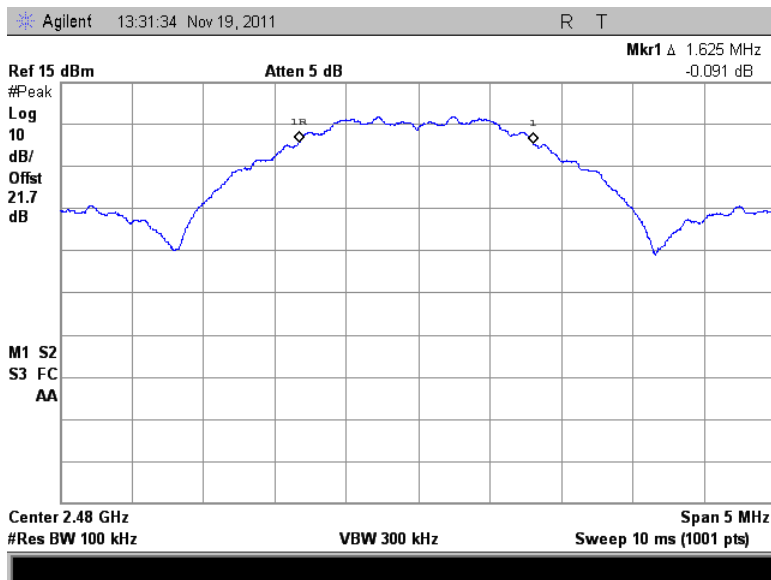


Figure 7.2.2-3: 6dB BW - High Channel

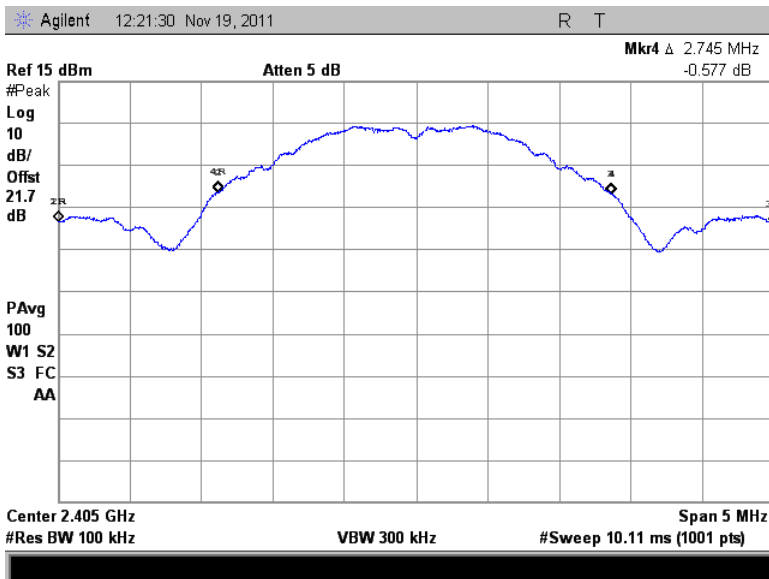


Figure 7.2.2-4: 99% OBW - Low Channel

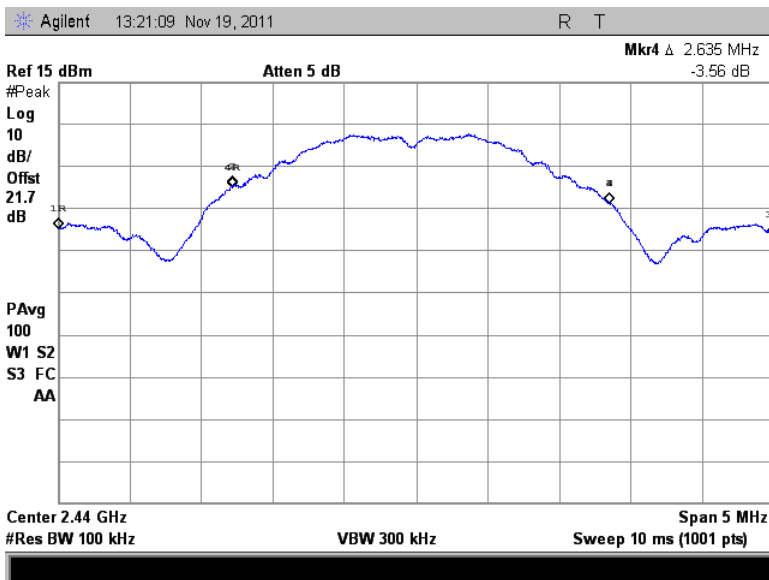


Figure 7.2.2-5: 99% OBW - Middle Channel

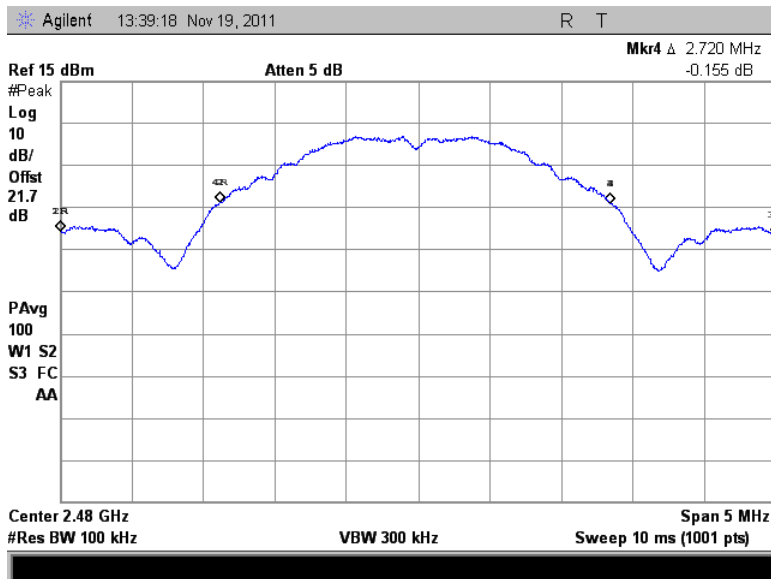


Figure 7.2.2-6: 99% OBW - High Channel

**7.3 Peak Output Power - FCC Section 15.247(b)(3) IC: RSS-210 A8.4(4)**

**7.3.1 Measurement Procedure (Conducted Method)**


The Peak Output Power was measured in accordance with the FCC KDB Publication No. 558074 "Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247)" Power Option 1. The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer. Data was collected with the EUT operating at maximum power per channelization.

**7.3.2 Measurement Results**

Results are shown below in Table 7.3.2-1 and Figures 7.3.2-1 to 7.3.2-3 below:

**Table 7.3.2-1: RF Output Power**

Frequency [MHz]	Level [dBm]
2405	12.08
2440	10.58
2480	10.03

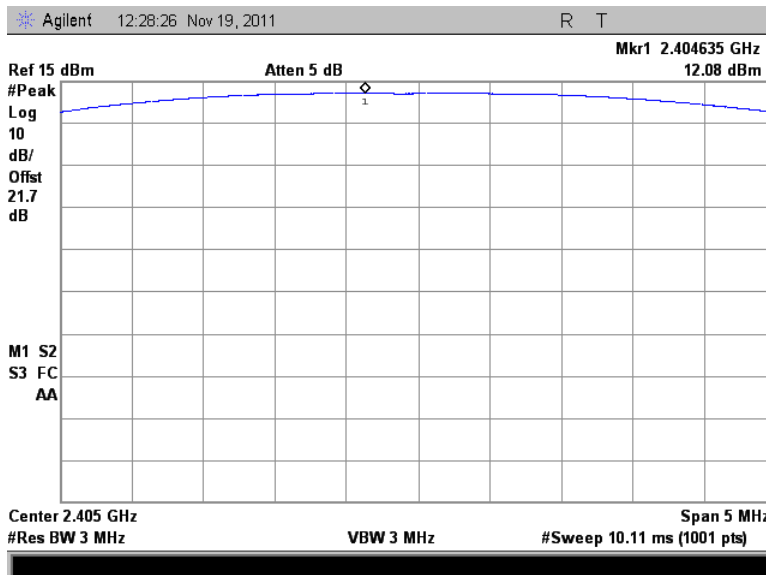

**Figure 7.3.2-1: RF Output Power - Low Channel**

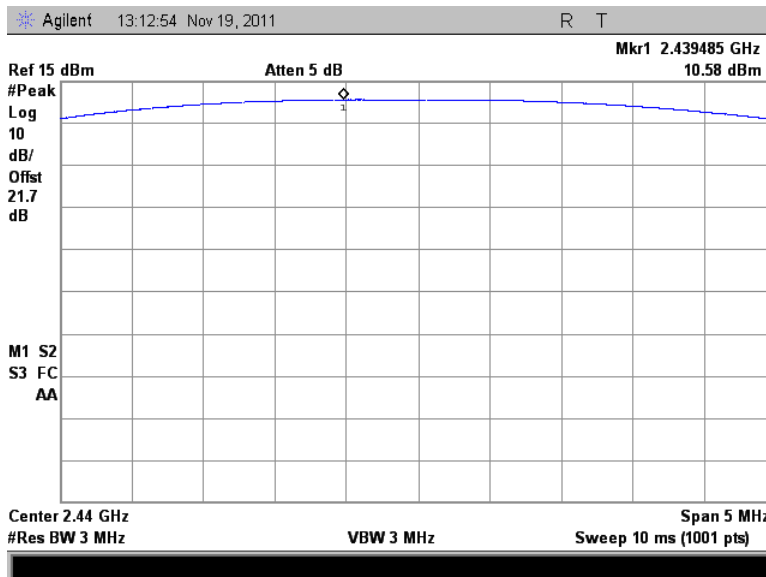


Figure 7.3.2-2: RF Output Power - Middle Channel

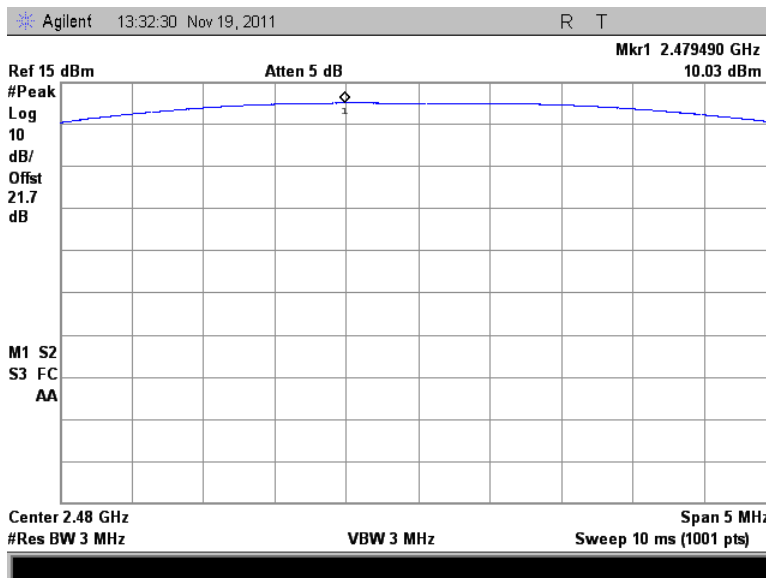


Figure 7.3.2-3: RF Output Power - High Channel



**7.4 Band-Edge Compliance and Spurious Emissions-FCC 15.247(d) IC:RSS-210 A8.5**


**7.4.1 Band-Edge Compliance of RF Conducted Emissions**

**7.4.1.1 Measurement Procedure**

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The EUT was investigated at the lowest and highest channel available to determine band-edge compliance. For each measurement the spectrum analyzer’s RBW was set to 100 kHz, and the VBW was set to 300 kHz.

**7.4.1.2 Measurement Results**

Results are shown in Figures 7.4.1.2-1 to 7.4.1.2-2 below.

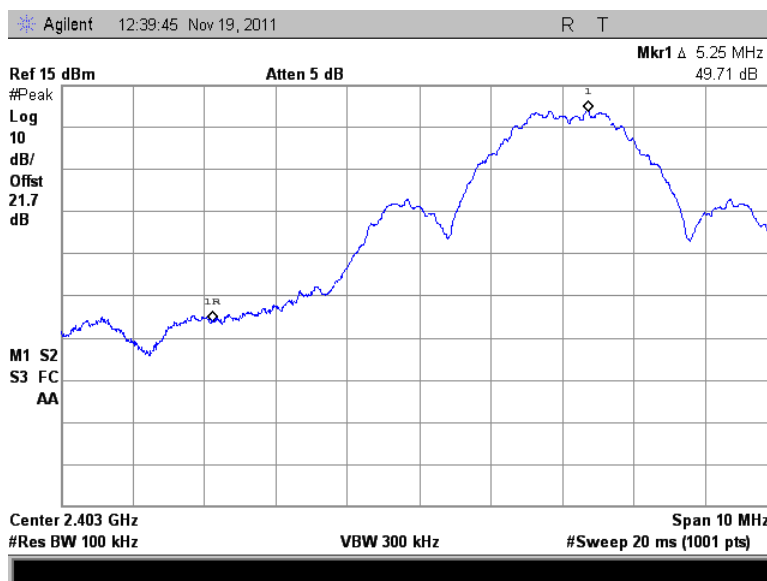

**Figure 7.4.1.2-1: Lower Band-edge**

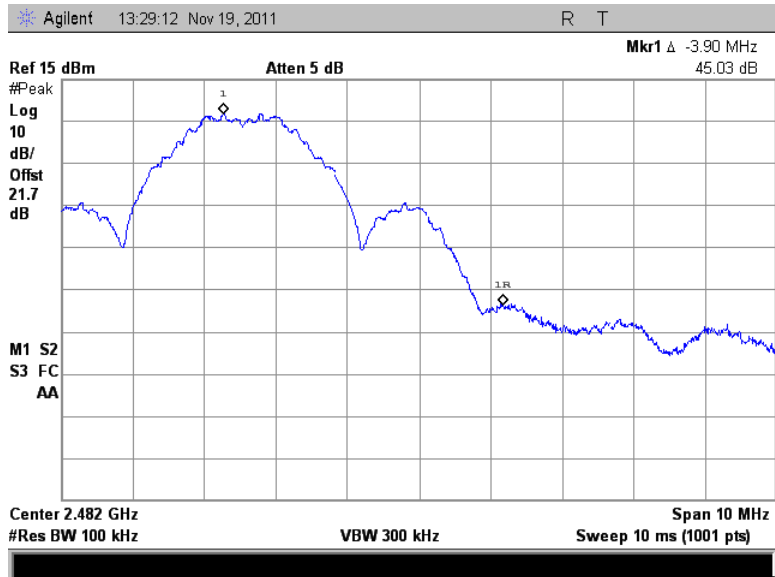


Figure 7.4.1.2-2: Upper Band-edge

### 7.4.2 Band-Edge Compliance of Radiated Emissions

#### 7.4.2.1 Measurement Procedure

Because the upper band-edge coincides with a restricted band, band-edge compliance for the upper band-edge was determined using the radiated marker-delta method. The radiated field strength of the fundamental emission was first measured and then the marker-delta method was used to determine the field strength of the band-edge emission.


#### 7.4.2.2 Measurement Results

Results are shown in Table 7.4.2.2-1 and Figures 7.4.2.2-1 to 7.4.2.2-2 below.

**Table 7.4.2.2-1: Upper Band-edge – Marker-Delta Method**

Frequency (MHz)	Uncorrected Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Fundamental Level (dBuV/m)		Marker-Delta (dB)	Band-Edge Level (dBuV/m)		Margin to Limits (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg		pk	Qpk/Avg	74	54
										pk	Qpk/Avg
2480	108.90	105.00	H	-9.94	98.96	95.06	44.80	54.16	50.26	19.84	3.74
2480	112.10	108.20	V	-9.94	102.16	98.26	45.34	56.82	52.92	17.18	1.08

**Note: Delta Marker method at the upper band edge**

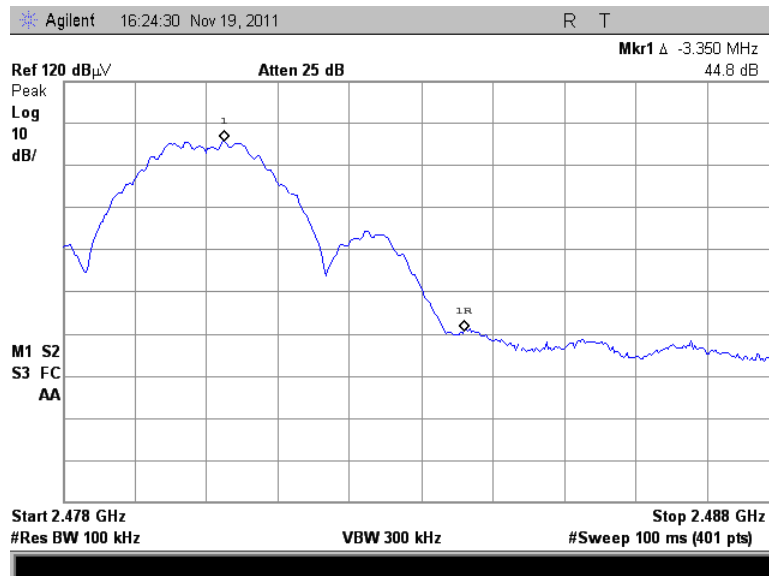

**Figure 7.4.2.2-1: Upper Band-edge – Horizontal**

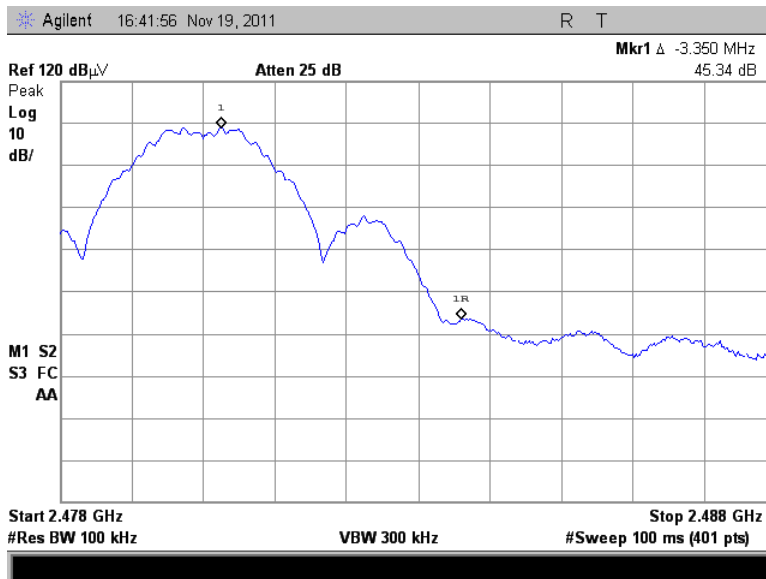


Figure 7.4.2.2-2: Upper Band-edge - Vertical

### 7.4.3 RF Conducted Spurious Emissions

#### 7.4.3.1 Measurement Procedure

The RF Conducted Spurious Emissions were measured in accordance with the FCC KDB Publication No. 558074 "Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247)". The RF output port of the equipment under test was directly connected to the input of the spectrum analyzer. The EUT was investigated for conducted spurious emissions from 30MHz to 26 GHz, 10 times the highest fundamental frequency. Measurements were made at the low, center and high channels of the EUT. For each measurement, the spectrum analyzer's RBW was set to 100 kHz and the VBW was set to 300 kHz. The peak Max Hold function of the analyzer was utilized.

#### 7.4.3.2 Measurement Results

Results are shown below in Figures 7.4.3.2-1 to 7.4.3.2-6:

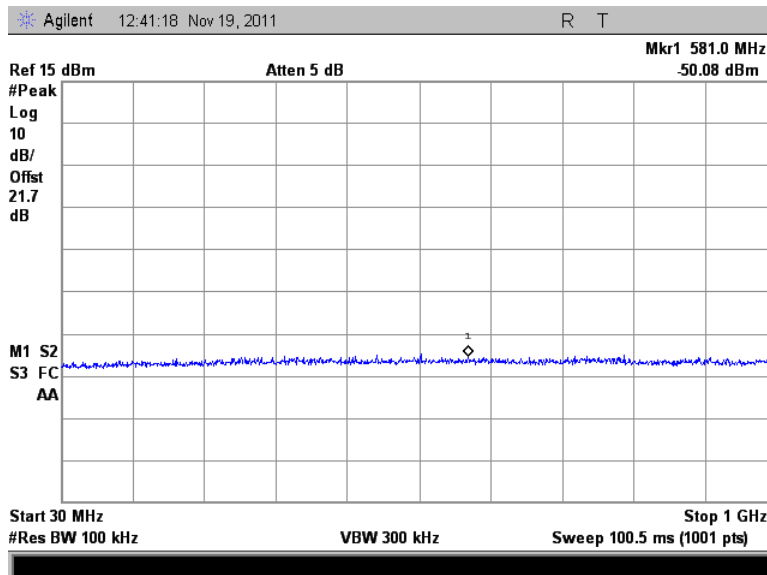


Figure 7.4.3.2-1: 30 MHz – 1 GHz – Low Channel

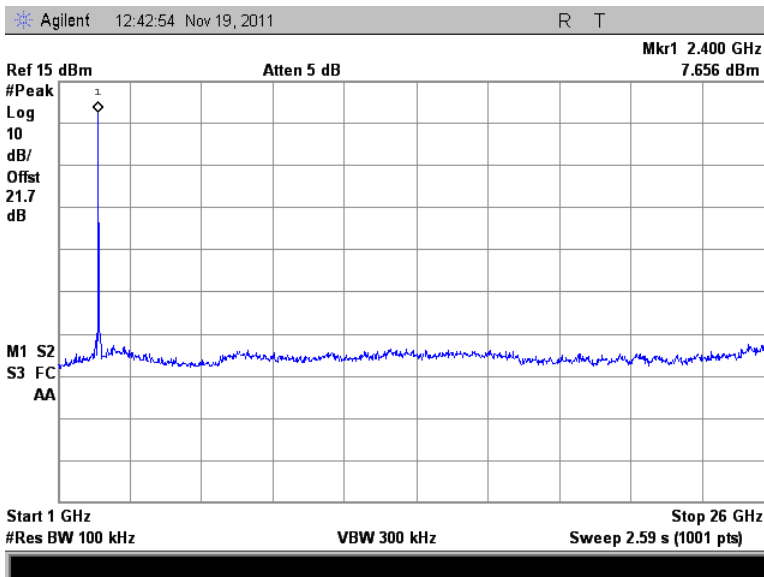


Figure 7.4.3.2-2: 1 GHz – 26 GHz – Low Channel

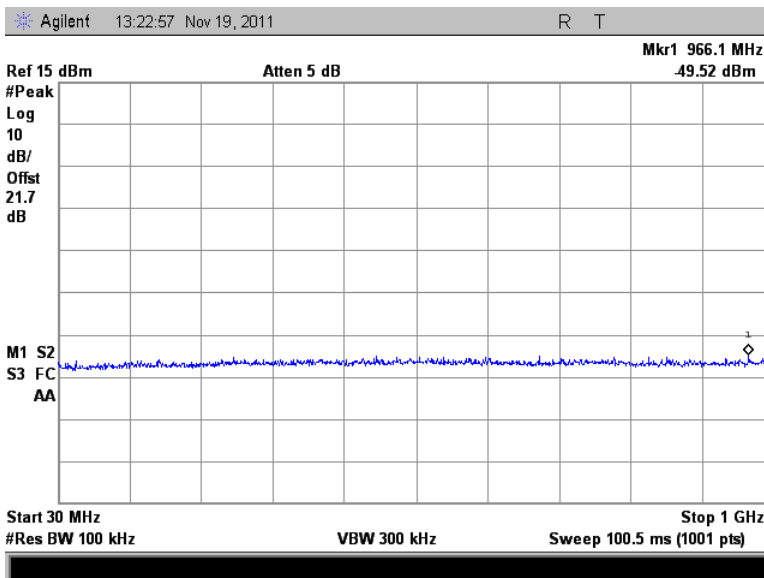


Figure 7.4.3.2-3: 30 MHz – 1 GHz – Middle Channel

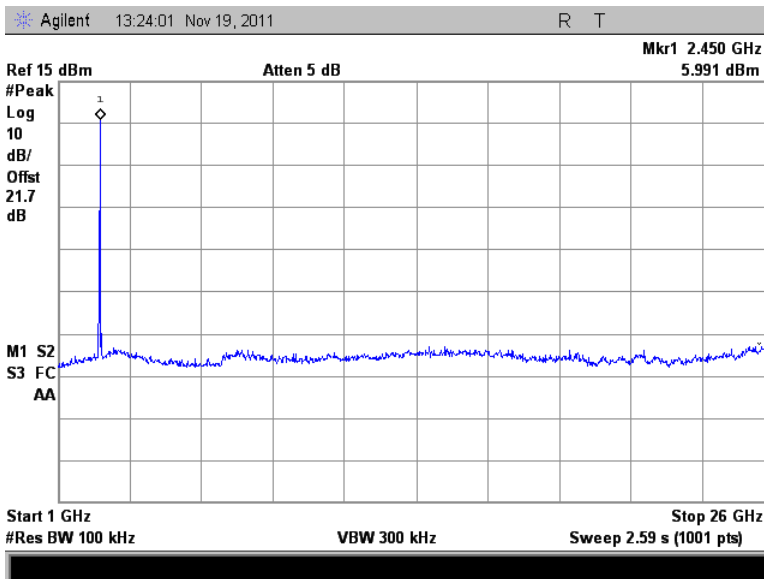


Figure 7.4.3.2-4: 1 GHz – 26 GHz – Middle Channel

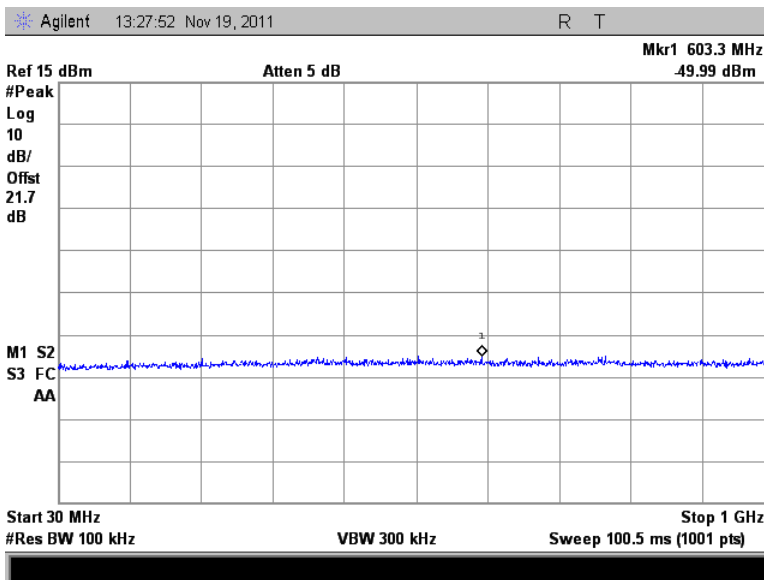


Figure 7.4.3.2-5: 30 MHz – 1 GHz – High Channel

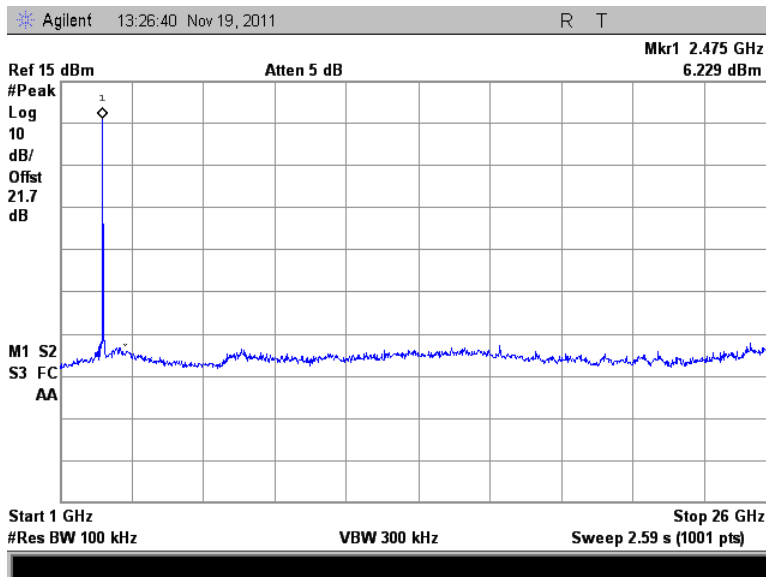


Figure 7.4.3.2-6: 1 GHz – 26 GHz –High Channel



**7.4.4 Radiated Spurious Emissions - FCC Section 15.205 IC: RSS-210 2.2, RSS-GEN 7.2.5**

**7.4.4.1 Measurement Procedure**

Radiated emissions tests were made over the frequency range of 30MHz to 26GHz, 10 times the highest fundamental frequency.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 120 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000MHz, peak and average measurements made with RBW of 1 MHz and VBW of 3MHz and 10 Hz respectively.

Each emission found to be in a restricted band was compared to the applicable radiated limits.

**7.4.4.2 Measurement Results**

Radiated spurious emissions found in the band of 30MHz to 26 GHz are reported in the Table 7.4.4.2-1 below.

**Table 7.4.4.2-1: Radiated Spurious Emissions Tabulated Data**

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
<b>Low Channel 2405 MHz</b>										
4810	48.37	38.68	V	-2.22	46.15	36.46	74.0	54.0	27.90	17.50
<b>Middle Channel 2440 Mhz</b>										
<b>Noise Floor</b>										
<b>High Channel 2480 MHz</b>										
<b>Noise Floor</b>										

Notes:

All emissions above 4810 MHz were attenuated below the noise floor of the measurement equipment and the limits.

**7.4.4.3 Sample Calculation:**

$$R_C = R_U + CF_T$$

Where:

 $CF_T$  = Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only) $R_U$  = Uncorrected Reading $R_C$  = Corrected Level

AF = Antenna Factor

CA = Cable Attenuation

AG = Amplifier Gain

DC = Duty Cycle Correction Factor

**Example Calculation: Peak**Corrected Level:  $48.37 + (-2.22) = 46.15$  dB $\mu$ V/mMargin:  $74$  dB $\mu$ V/m –  $46.15$  dB $\mu$ V/m =  $27.9$  dB**Example Calculation: Average**Corrected Level:  $38.68 + (-2.22) = 36.46$  dB $\mu$ V/mMargin:  $54$  dB $\mu$ V/m –  $36.46$  dB $\mu$ V/m =  $17.5$  dB

**7.5 Power Spectral Density - FCC Section 15.247(e) IC: RSS-210 A8.2(b)**

**7.5.1 PSD Measurement Procedure (Conducted Method)**


The power spectral density was measured in accordance with the FCC KDB Publication No. 558074 "Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247)" PSD Option 1. The RF output port of the EUT was directly connected to the input of the spectrum analyzer. Offset values were input for cable and attenuation. The spectrum analyzer RBW was set to 3 kHz and VBW 10 kHz. Span was adjusted to 1500 kHz and the sweep time was set to 500 s = (Span/3 kHz).

**7.5.2 Measurement Results**

Results are shown below in Table 7.5.2-1 and Figures 7.5.2-1 to 7.5.2-3 below:

**Table 7.5.2-1: RF Output Power**

Frequency [MHz]	Level [dBm]
2405	-1.378
2440	-3.548
2480	-3.706

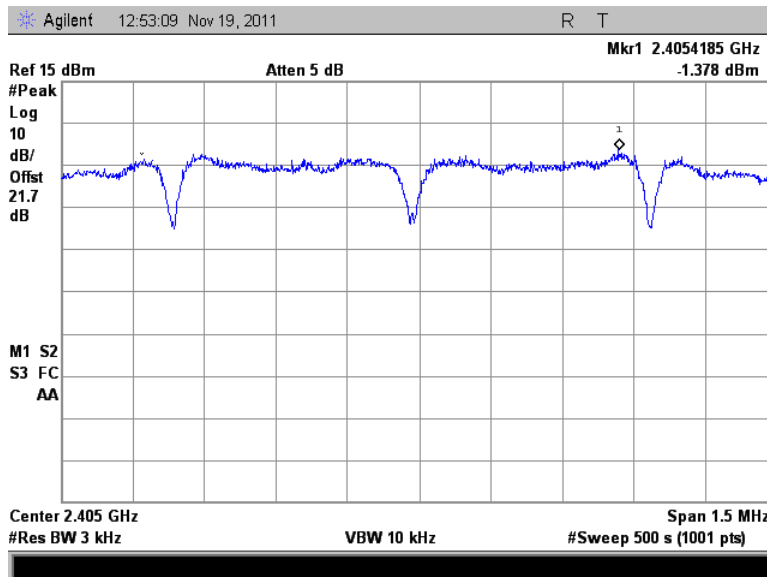

**Figure 7.5.2-1: Power Spectral Density - Low Channel**

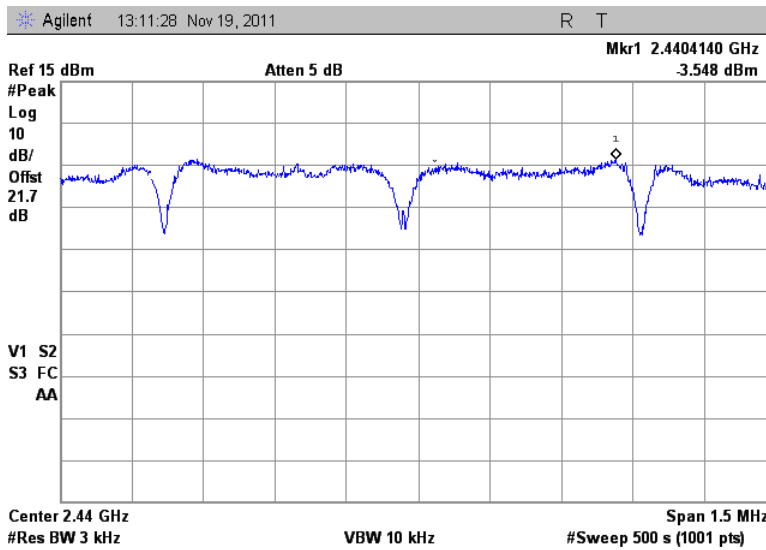


Figure 7.5.2-2: Power Spectral Density - Middle Channel

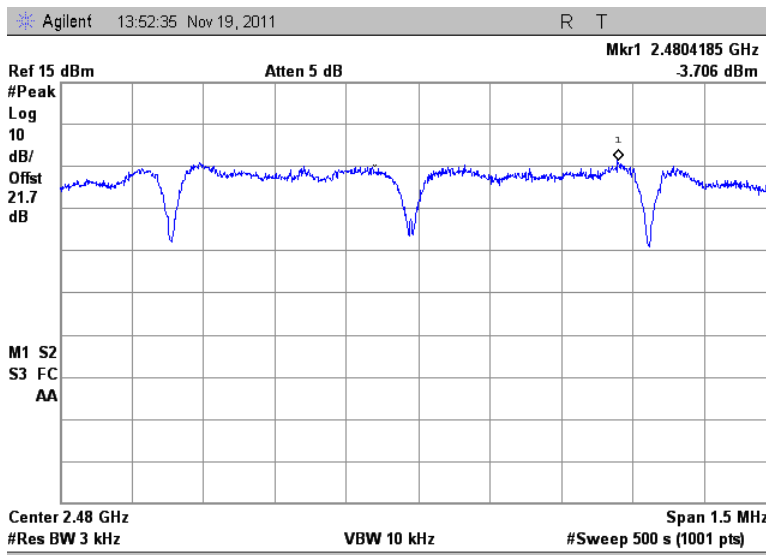


Figure 7.5.2-3: Power Spectral Density – High Channel

7.6 Power Line Conducted Emissions – FCC: Section 15.207 IC: RSS-Gen 7.2.4

7.6.1 Measurement Procedure

ANSI C63.4 sections 6 and 7 were the guiding documents for this evaluation. Conducted emissions were performed from 150kHz to 30MHz with the spectrum analyzer’s resolution bandwidth set to 9kHz and the video bandwidth set to 30kHz. The calculation for the conducted emissions is as follows:

**Corrected Reading = Analyzer Reading + LISN Loss + Cable Loss**  
**Margin = Applicable Limit - Corrected Reading**

7.6.2 Measurement Results

Results of the test are shown below in Tables 7.6.2-1 and 7.6.2-2 and Figures 7.6.2-1 and 7.6.2-2.

Table 7.6.2-1: Line 1 Conducted EMI Results

<input checked="" type="checkbox"/> Line 1 <input checked="" type="checkbox"/> To Ground <input type="checkbox"/> Floating <input type="checkbox"/> Telecom Port _____ <input checked="" type="checkbox"/> dBµV <input type="checkbox"/> dBµA Plot Number: <u>11-2108CE03</u> Power Supply Description: <u>N/A</u>									
Frequency (MHz)	Uncorrected Reading		Total Correction Factor (dB)	Corrected Level		Limit		Margin (dB)	
	Quasi-Peak	Average		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
Line 1									
0.381138	44.464	39.552	0.68	45.15	40.23	58.25	48.25	13.1	8.0
0.4488	43.957	39.159	0.60	44.55	39.76	56.90	46.90	12.3	7.1
0.644125	38.87	33.927	0.51	39.38	34.44	56.00	46.00	16.6	11.6
0.707613	40.284	35.626	0.50	40.78	36.12	56.00	46.00	15.2	9.9
0.768337	37.23	33.065	0.50	37.73	33.56	56.00	46.00	18.3	12.4
0.898349	37.043	32.417	0.50	37.54	32.91	56.00	46.00	18.5	13.1
0.965313	39.149	34.227	0.48	39.63	34.71	56.00	46.00	16.4	11.3
1.02478	37.468	32.962	0.50	37.97	33.47	56.00	46.00	18.0	12.5
1.22315	40.41	35.755	0.50	40.91	36.26	56.00	46.00	15.1	9.7
1.48578	42.313	37.702	0.50	42.82	38.21	56.00	46.00	13.2	7.8

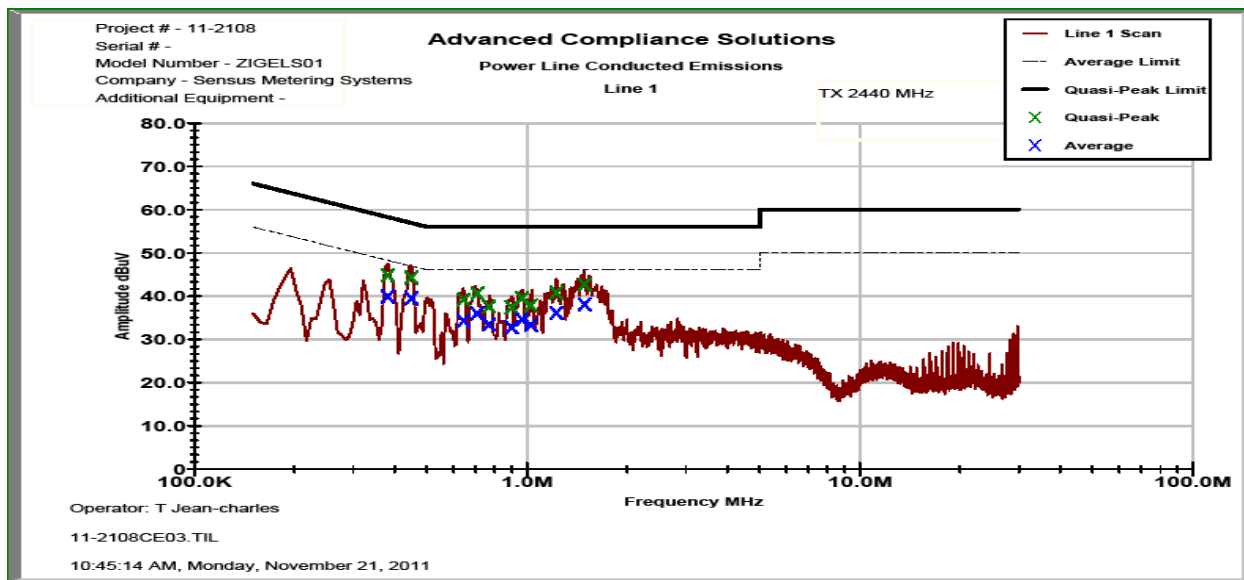


Figure 7.6.2-1: Line 1 Conducted EMI Results

Table 7.6.2-2: Line 2 Conducted EMI Results

<input checked="" type="checkbox"/> Line 2 <input checked="" type="checkbox"/> To Ground <input type="checkbox"/> Floating <input type="checkbox"/> Telecom Port _____ <input checked="" type="checkbox"/> dB $\mu$ V <input type="checkbox"/> dB $\mu$ A  Plot Number: <u>11-2108CE03</u> Power Supply Description: <u>N/A</u>									
Frequency (MHz)	Uncorrected Reading		Total Correction Factor (dB)	Corrected Level		Limit		Margin (dB)	
	Quasi-Peak	Average		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
<b>Line 2</b>									
0.383688	45.165	40.756	0.74	45.90	41.49	58.20	48.20	12.3	6.7
0.447888	43.661	40.145	0.65	44.31	40.80	56.91	46.91	12.6	6.1
0.51125	38.993	35.004	0.59	39.59	35.60	56.00	46.00	16.4	10.4
0.51295	38.831	34.819	0.59	39.42	35.41	56.00	46.00	16.6	10.6
0.643274	39.583	34.972	0.56	40.15	35.53	56.00	46.00	15.9	10.5
0.703074	40.207	36.234	0.54	40.74	36.77	56.00	46.00	15.3	9.2
0.952175	36.513	32.154	0.52	37.04	32.68	56.00	46.00	19.0	13.3
1.02567	37.649	32.808	0.56	38.21	33.37	56.00	46.00	17.8	12.6
1.28221	39.412	34.528	0.56	39.97	35.09	56.00	46.00	16.0	10.9
1.47897	42.626	38.287	0.56	43.19	38.85	56.00	46.00	12.8	7.2

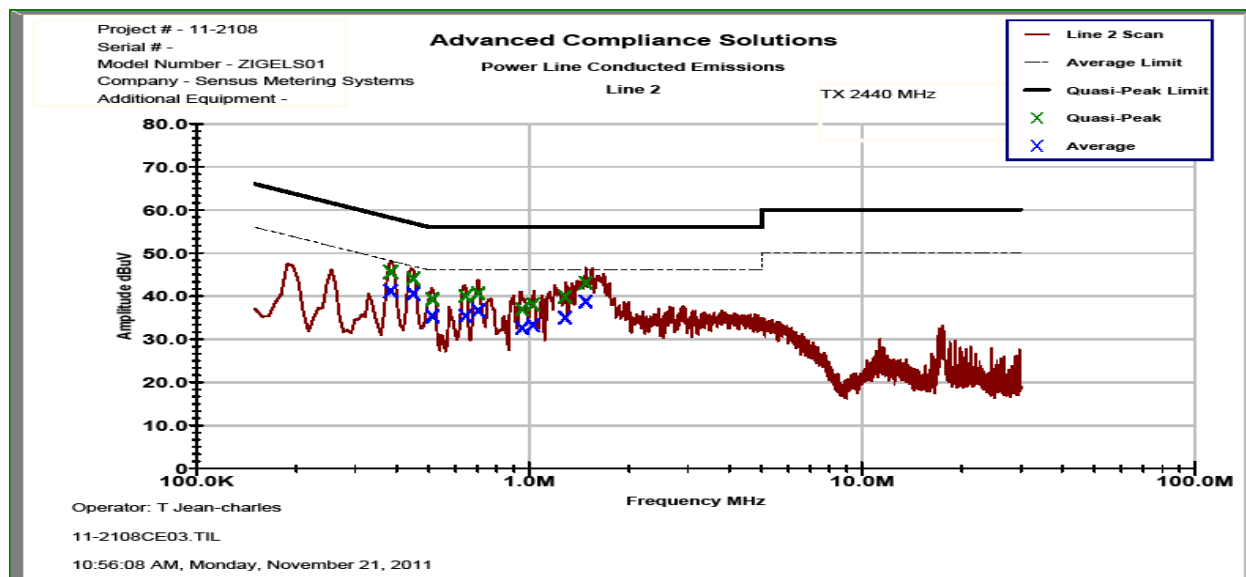


Figure 7.6.2-2: Line 2 Conducted EMI Results

## **8 CONCLUSION**

In the opinion of ACS, Inc. the ZIGELS01, manufactured by Sensus Metering Systems, Inc. meets the requirements of FCC Part 15 subpart C and Industry Canada's Radio Standards Specification RSS-210.

**END REPORT**