



# Test Report

Report No	EE0472-1
Client	Power Measurement 2195 Keating Cross Road Saanichton, BC V8M 2A5
Phone	1-250-652-7100
FRN	0011084126
Model	ION 6100
FCC ID	SDP-ION6100
Equipment Type	Low Power Communications Device Transmitter
Equipment Code	DXX
Results	As detailed within this report
Prepared by	 Evan Gould – Test Engineer
Authorized by	 Michael Buchholz – EMC Manager
Issue Date	7/16/04
Conditions of issue	This Test Report is issued subject to the conditions stated in 'terms and conditions' section of this report.

Curtis-Straus LLC is accredited by the American Association for Laboratory Accreditation for the specific scope of accreditation under Certificate Number 1627-01. This report may contain data which is not covered by the A2LA accreditation.

**Curtis-Straus** LLC • 527 Great Road • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



## Table Of Contents

<i>Summary</i> .....	3
<i>Test Methodology</i> .....	3
<i>Statement of Conformity</i> .....	4
<i>EUT Configuration</i> .....	5
<i>Fundamental Measurements</i> .....	6
<i>Band Edge Measurements</i> .....	7
<i>Radiated Spurious Emissions</i> .....	8
<i>AC Line Conducted Emission Measurements</i> .....	10
<i>Voltage Variation</i> .....	11
<i>Test Equipment Used</i> .....	12
<i>Terms And Conditions</i> .....	13
<i>A2LA Accreditation</i> .....	15

## ***Summary***

This test report supports an application for certification of a transmitter operating pursuant to 47 CFR 15.249. The product is the Power Measurement ION 6100. It is a transmitter that operates at one channel (916MHz) in the range 902-928MHz. The transmitter module is the Millennial Net i-Bean Gateway (Model GW-5209R).

## ***Test Methodology***

Radiated emissions testing is performed according to the procedures specified in ANSI C63.4 (2002). The EUT was mounted both outside and inside a metal electrical box to represent both mounting options. Emissions were maximized by rotating the device around three orthogonal axes as well as varying the test antenna's height and polarity.

Frequency range investigated: 0.15MHz – 10GHz

Measurement distance:	0.15 - 30MHz	Conducted
	30MHz – 10GHz	3m

AC Line conducted emissions testing was performed with a 50Ω/50µH LISN.

***Statement of Conformity***

The ION6100 has been found to conform to the following parts of 47 CFR as detailed below:

Part 2	Part 15	Comments
	15.15(b)	There are no controls accessible to the user that vary the output power.
2.925	15.19	The label is shown in the label exhibit.
	15.21	Information to the user is shown in the instruction manual exhibit.
	15.27	No special accessories are required for compliance.
	15.203	This product uses a reverse SMA antenna connector.
	15.205 15.209	The fundamental is not in a Restricted band and the spurious and harmonic emissions in the Restricted bands comply with the general emission limits of 15.209.
	15.207	The unit meets the AC conducted emissions requirements of 15.207.
	15.249	The unit complies with the requirements of 15.249

## *EUT Configuration*

<b>EUT Configuration</b>				
<b>Work Order:</b> E0472				
<b>Company:</b> Power Measurement				
<b>Company Address:</b> 2195 Keating Cross Road				
	Saanichton, BC V8M2A5			
<b>Contact:</b> Mike Woods				
<b>Person Present:</b> Stewart Gill				
<b>MN</b>		<b>SN</b>		
<b>EUT:</b> ION 6100		1		
<b>EUT Description:</b> Digital Power Meter				
<b>EUT Max Frequency:</b> 916MHz				
<b>Support Equipment:</b>	<b>MN</b>		<b>SN</b>	
none				
<b>EUT Cables:</b>	<b>Qty</b>	<b>Shielded?</b>	<b>Length</b>	<b>Ferrites</b>
Current sensor twisted pair	3	No	1m	No
Power cable	1	No	2m	No
<b>Unpopulated EUT Ports:</b>	<b>Qty</b>	<b>Reason</b>		
none				
<b>Software / Operating Mode Description:</b>				
EUT transmitting modulated on it's only channel.				

## Fundamental Measurements

### LIMIT

Quasi-Peak: 50mV/m = 93.9dB $\mu$ V/m @ 3m [15.249(a)]


Note: If Peak measurements meet Quasi-Peak limits, then Quasi-Peak measurements are not required.

## MEASUREMENTS

Radiated Emissions Table							Curtis-Straus LLC					
Date: 08-Jun-04			Company: Power Measurements			Work Order: E0472						
Engineer: Evan Gould			EUT Desc: ION6100									
Frequency Range: 916.6MHz						Measurement Distance: 3 m						
Notes:						EUT Max Freq: 916.6MHz						
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dB $\mu$ V)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dB $\mu$ V/m)	47 CFR 15.249(a)					
120V External Configuration						Limit (dB $\mu$ V/m)	Margin (dB)	Result (Pass/Fail)				
Hpk	916.6	44.9	0.0	21.7	5.0	71.6	93.9	-22.3	Pass			
120V Internal Configuration			---	---	---	---	---	---	---			
Hpk	916.5	59.3	0.0	21.7	5.0	86.0	93.9	-7.9	Pass			
480V External Configuration			---	---	---	---	---	---	---			
Hx	916.6	55.8	0.0	21.7	5.0	82.5	93.9	-11.4	Pass			
Test Site: "F"		Pre-Amp: none	Cable: 65 ft RG8A/U		Analyzer: Orange	Antenna: Green						

## SAMPLE ANALYZER PLOT

Agilent 11:04:54 Jun 8, 2004

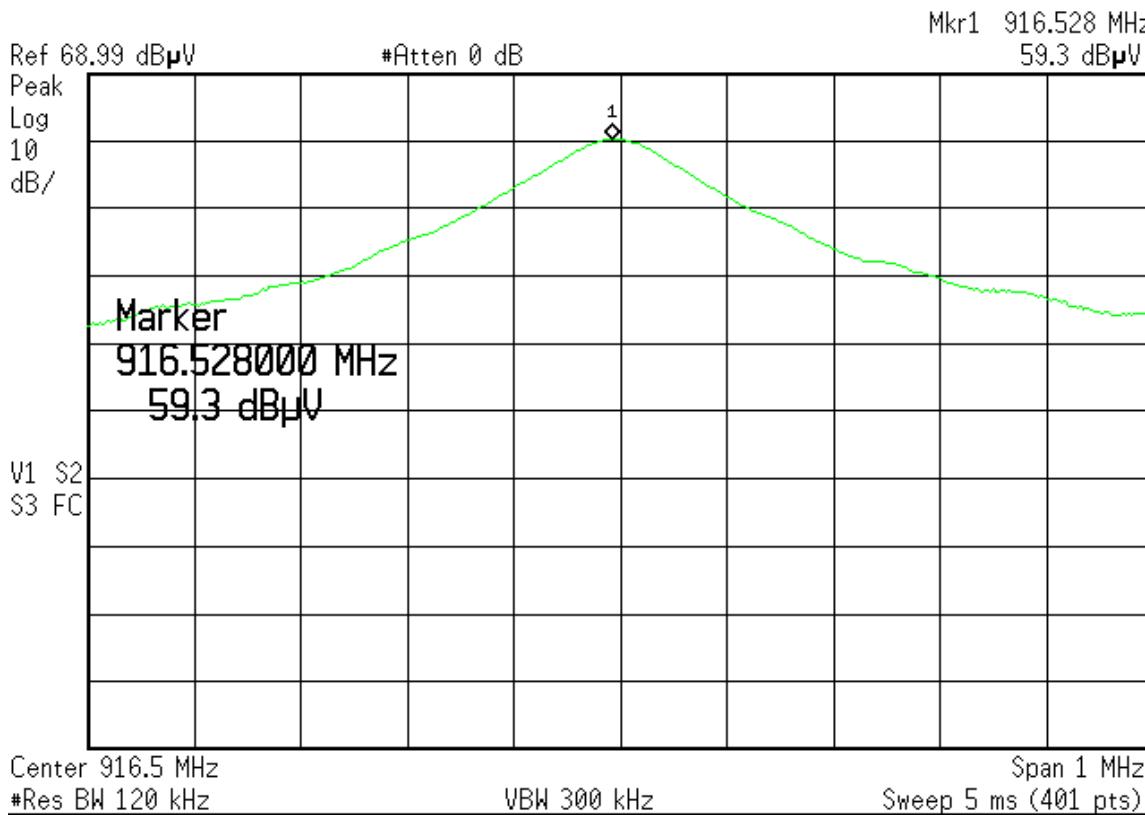

## Band Edge Measurements

### LIMITS

Quasi-Peak: 50dB below level of Fundamental *OR*

General radiated emission limits of 15.209


“...whichever is the lesser attenuation.” [15.249(c)]

**Note:** If Peak measurements meet Quasi-Peak limits, then Quasi-Peak measurements are not required.

## MEASUREMENTS

Radiated Emissions Table							Curtis-Straus LLC					
Date: 08-Jun-04			Company: Power Measurements			Work Order: E0472						
Engineer: Evan Gould			EUT Desc: ION6100									
Measurement Distance: 3 m												
Notes: 120V internal							EUT Max Freq: 916.6MHz					
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dB $\mu$ V)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dB $\mu$ V/m)	47 CFR 15.209					
Band Edges			---	---	---	---	Limit (dB $\mu$ V/m)	Margin (dB)	Result (Pass/Fail)			
Hpk	901.4	29.4	23.9	21.6	4.9	32.0	46.0	-14.0	Pass			
Hpk	928.3	26.9	23.7	21.8	5.0	30.0	46.0	-16.0	Pass			
<b>Table Result:</b> Pass by -14.0 dB							<b>Worst Freq:</b> 901.4 MHz					
Test Site: "F"	Pre-Amp: Orange		Cable: 65 ft RG8A/U		Analyzer: Orange		Antenna: Green					

## ANALYZER PLOT

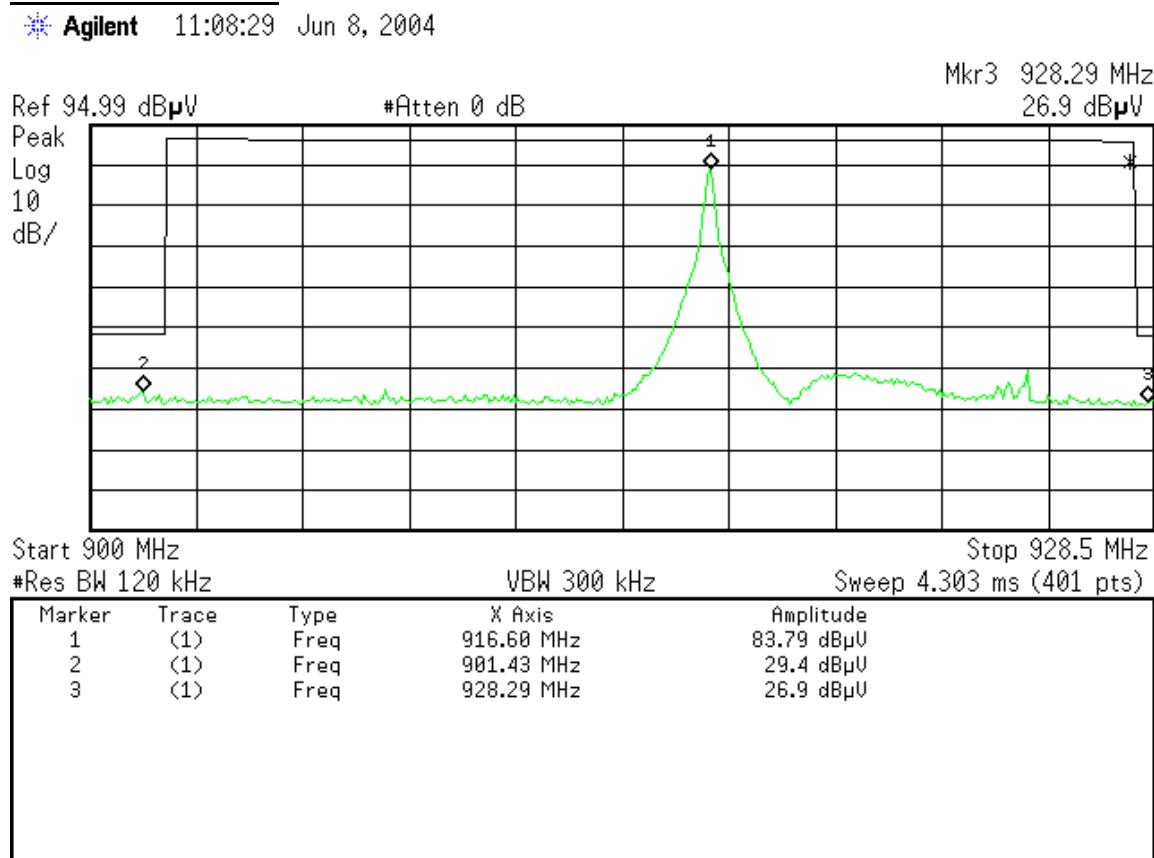

## Radiated Spurious Emissions

### LIMITS

Average:  $500\mu\text{V}/\text{m} = 53.9\text{dB}\mu\text{V}/\text{m}$  @ 3m [15.249(a), (b), and (d)]

Peak:  $53.9\text{dB}\mu\text{V}/\text{m} + 20\text{dB} = 73.9\text{dB}\mu\text{V}$  @ 3m [15.249(d)]

**Note:** If Peak measurements meet Average limits, then Average measurements are not required.

### MEASUREMENTS

Radiated Emissions Table							Curtis-Straus LLC						
Date: 08-Jun-04			Company: Power Measurements				Work Order: E0472						
Engineer: Evan Gould							EUT Desc: ION6100						
Frequency Range: 30-1000MHz							Measurement Distance: 3 m						
Notes: 120V internal TX unit							EUT Max Freq: 916.6MHz						
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dB $\mu$ V)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dB $\mu$ V/m)	47 CFR 15.209						
V	160.0	47.0	24.6	10.9	1.7	35.0	43.5	-8.5	Pass				
V	320.0	40.3	24.1	14.4	2.5	33.1	46.0	-12.9	Pass				
<b>Table Result:</b> Pass by -8.5 dB							<b>Worst Freq:</b> 160.0 MHz						
Test Site: "F"		Pre-Amp: Orange		Cable: 65 ft RG8A/U		Analyzer: Green		Antenna: Green					

Radiated Emissions Table							Curtis-Straus LLC						
Date: 08-Jun-04			Company: Power Measurements				Work Order: E0472						
Engineer: Josh LeBlanc							EUT Desc: ION6100						
Frequency Range: 30-1000MHz							Measurement Distance: 3 m						
Notes: 120V external RX unit							EUT Max Freq: 916.6MHz						
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dB $\mu$ V)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dB $\mu$ V/m)	47 CFR 15.209						
V	160.0	45.1	24.6	10.9	1.7	33.1	43.5	-10.4	Pass				
V	320.0	44.2	24.1	14.4	2.5	37.0	46.0	-9.0	Pass				
V	360.0	32.9	24.1	15.5	2.7	27.0	46.0	-19.0	Pass				
V	480.0	32.9	23.9	17.5	3.3	29.8	46.0	-16.2	Pass				
V	560.0	37.9	23.9	18.7	3.6	36.3	46.0	-9.7	Pass				
V	720.0	36.2	23.9	20.1	4.3	36.7	46.0	-9.3	Pass				
<b>Table Result:</b> Pass by -9.0 dB							<b>Worst Freq:</b> 320.0 MHz						
Test Site: "F"		Pre-Amp: Orange		Cable: 65 ft RG8A/U		Analyzer: Green		Antenna: Green					

**Radiated Emissions Table***Curtis-Straus LLC*

Date: 08-Jun-04		Company: Power Measurements			Work Order: E0472					
Engineer: Josh LeBlanc		EUT Desc: ION6100								
<b>Frequency Range:</b> 1-10GHz						<b>Measurement Distance:</b> 3 m				
<b>Notes:</b> 120V external TX						<b>EUT Max Freq:</b> 916.6MHz				
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dB $\mu$ V)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dB $\mu$ V/m)	<b>47 CFR 15.209</b>			
Hpk	1833.33	41.2	24.1	29.0	1.6	47.7	Limit (dB $\mu$ V/m)	Margin (dB)	Result (Pass/Fail)	
Havg	1833.33	33.3	24.1	29.0	1.6	39.8	54.0	-6.3	Pass	
<b>Table Result:</b> Pass by -6.3 dB						<b>Worst Freq:</b> 1833.33 MHz				
Test Site: "F"		Pre-Amp: Or-Blk		Cable: 5 RG142LL		Analyzer: Orange		Antenna: Black Horn		

**No spurious emissions were found in the range 1-10GHz for the RX version.**

**AC Line Conducted Emission Measurements****LIMITS**

Frequency of emission (MHz)	Quasi-peak limit (dB $\mu$ V)	Average limit (dB $\mu$ V)
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

[47 CFR 15.207(a)]

**MEASUREMENTS****AC Mains Conducted Emissions***Curtis-Straus LLC*

Date: 08-Jun-04		Company: Power Measurement				Work Order: E0472							
Engineer: Josh LeBlanc		EUT Desc: Model 6100				Test Site: EM12							
<b>Notes:</b> 120V													
<b>LISN(s):</b> Yellow-Black													
Range: 0.15-30Mhz	Other Equipment: ---				Spectrum Analyzer: Blue								
Frequency (MHz)	Q.P. Readings		Ave. Readings		Impedance Factor	FCC B Applicable until July 12, 2004		FCC/CISPR B	FCC/CISPR B	Overall Result			
	QP1 (dB $\mu$ V)	QP2 (dB $\mu$ V)	AV1 (dB $\mu$ V)	AV2 (dB $\mu$ V)	(dB)	Limit (dB $\mu$ V)	Margin dB	qp Limit (dB $\mu$ V)	qp Margin dB	AVE Limit (dB $\mu$ V)	AVE Margin dB		
0.21	32.5	30.6	27.3	25.8	20.0	---	---	63.4	-10.9	53.4	-6.1		
0.31	25.2	23.1	20.5	16.8	20.0	---	---	60.0	-14.8	50.0	-9.5		
0.41	27.8	25.0	26.8	24.2	20.0	---	---	57.6	-9.8	47.6	-0.8		
0.52	18.4	17.2	16.7	14.0	20.0	47.9	-9.5	56.0	-17.6	46.0	-9.3		
0.93	16.5	14.1	15.0	13.0	20.0	47.9	-11.4	56.0	-19.5	46.0	-11.0		
9.01	18.4	20.0	16.5	19.6	20.0	47.9	-7.9	60.0	-20.0	50.0	-10.4		

**Table Result:** Pass by -0.80 dB

**Worst Freq:** 0.41 MHz

**AC Mains Conducted Emissions***Curtis-Straus LLC*

Date: 08-Jun-04		Company: Power Measurement				Work Order: E0472							
Engineer: Josh LeBlanc		EUT Desc: Model 6100				Test Site: EM12							
<b>Notes:</b> 480V unit													
<b>LISN(s):</b> Yellow-Black													
Range: 0.15-30Mhz	Other Equipment: ---				Spectrum Analyzer: Blue								
Frequency (MHz)	Q.P. Readings		Ave. Readings		Impedance Factor	FCC B Applicable until July 12, 2004		FCC/CISPR B	FCC/CISPR B	Overall Result			
	QP1 (dB $\mu$ V)	QP2 (dB $\mu$ V)	AV1 (dB $\mu$ V)	AV2 (dB $\mu$ V)	(dB)	Limit (dB $\mu$ V)	Margin dB	qp Limit (dB $\mu$ V)	qp Margin dB	AVE Limit (dB $\mu$ V)	AVE Margin dB		
0.75	9.0	7.0			20.0	47.9	-18.9	56.0	-27.0	46.0	-17.0		
2.63	9.1	6.3			20.0	47.9	-18.8	56.0	-26.9	46.0	-16.9		
4.65	7.4	5.2			20.0	47.9	-20.5	56.0	-28.6	46.0	-18.6		
6.00	9.9	5.3			20.0	47.9	-18.0	60.0	-30.1	50.0	-20.1		
7.28	6.3	3.7			20.0	47.9	-21.6	60.0	-33.7	50.0	-23.7		
10.10	7.9	4.6			20.0	47.9	-20.0	60.0	-32.1	50.0	-22.1		

**Table Result:** Pass by -16.90 dB

**Worst Freq:** 2.63 MHz

## ***Voltage Variation***

### **REQUIREMENT**

*"For intentional radiators, measurements of the variation of the...radiated signal level of the fundamental frequency component of the emission...shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage."*  
[15.31(e)]

### **MEASUREMENTS**

<b>Voltage Variation</b>		
<b>Date:</b> 8-Jun-04		
<b>Company:</b> Power Measurement		
<b>EUT:</b> ION6100		
<b>Engineer:</b> Evan Gould		
<b>Analyzer:</b> Orange		
<b>Antenna:</b> Green		
<b>Notes:</b> Label reads: 208-240 ±10%		
Supply Voltage	Frequency (MHz)	Reading (dBuV/m)
276V (240V +15%)	916.9	58.1
176.8V (208V -15%)	916.9	57.9

## Test Equipment Used

REV. 28-JUN-2004							
<b>SPECTRUM ANALYZERS</b>		RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
GREEN		9kHz-26.5GHz	8593E	HP	3829A03618	00143	10-OCT-2004
ORANGE		9kHz-26.5GHz	E4407B	HP	US39440975	00394	03-JUN-2005
<b>LISNs/MEASUREMENT PROBES</b>		RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
YELLOW-BLACK		10kHz-30MHz	8012-50-R-24-BNC	SOLAR	984735	00248	02-APR-2005
<b>OPEN AREA TEST SITE (OATS)</b>		FCC CODE		IC CODE	VCCI CODE	CALIBRATION DUE	
SITE F		93448		IC 2762-F	R-1688	25-MAR-2005	
<b>LINE CONDUCTED TEST SITES</b>		FCC CODE		IC CODE	VCCI CODE	CALIBRATION DUE	
EMI 2		93448		N/A	C-1802	01-MAY-2006	
<b>PREAMPS</b>		RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
ORANGE		0.01-2000MHz	ZFL-1000-LN	C-S	N/A	00765	27-FEB-2005
ORANGE-BLACK		1-20GHz	SMC-12A	C-S	637367	00761	29-JUL-2004
<b>ANTENNAS</b>		RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
GREEN BILOG	30MHz-2GHz	CBL6112B	CHASE	2742	00620		06-APR-2006
BLACK HORN	1-18GHz	3115	EMCO	9703-5148	00056		12-JUN-2005

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

## Terms And Conditions

### Paragraph 1. SERVICES. LABORATORY will:

- 1.1 Use the degree of care and skill ordinarily exercised by and consistent with the standards of the profession.
- 1.2 Perform all technical services in substantial accordance with the generally accepted laboratory principles and practices.
- 1.3 Retain all pertinent records relating to the services performed for a period of three (3) years following submission of the report describing such services, during which period the records will be made available to CLIENT upon reasonable request.

### Paragraph 2. CLIENT'S RESPONSIBILITIES. CLIENT or his authorized representative will:

- 2.1 Provide LABORATORY with all plans, schematics, specifications, addenda, change orders, drawings and other information for the proper performance of technical services.
- 2.2 Designate a person to act as CLIENT's representative with respect to LABORATORY's services to be performed on behalf of the CLIENT; such person or firm to have complete authority to transmit instructions, receive information and data, interpret and define CLIENT's policies and decisions with respect to the LABORATORY's work on behalf of the CLIENT and to order, at CLIENT's expense, such technical services as may be required.
- 2.3 Designate a person who is authorized to receive copies of LABORATORY's reports.
- 2.4 Undertake the following:
  - (a) Secure and deliver to LABORATORY, without cost to LABORATORY, preliminary representative samples of the equipment proposed to require technical services, together with any relevant data.
  - (b) Furnish such labor and equipment needed by LABORATORY to handle samples at the LABORATORY and to facilitate the specified technical services.

### Paragraph 3. GENERAL CONDITIONS:

- 3.1 LABORATORY, by the performance of services covered hereunder, does not in any way assume any of those duties or responsibilities customarily vested in the CLIENT, its employees, or any other party, agency or authority.
- 3.2 LABORATORY shall not be responsible for acts of omissions of any other party or parties involved in the design, manufacture or maintenance of the equipment or the failure of any employee, contractor or subcontractor to undertake any aspect of equipment's design, manufacture or maintenance.
- 3.3 LABORATORY is not authorized to revoke, alter, release, enlarge or release any requirement of the equipment's design, manufacture or maintenance unless specifically authorized by CLIENT or his authorized representative.
- 3.4 THE ONLY WARRANTY MADE BY LABORATORY IN CONNECTION WITH ITS SERVICE PERFORMED HEREUNDER IS THAT IT WILL USE THAT DEGREE OF CARE AND SKILL AS SET FORTH IN PARAGRAPH 1 ABOVE. NO OTHER WARRANTY, EXPRESS OR IMPLIED, IS MADE OR INTENDED FOR SERVICES PROVIDED HEREUNDER.
- 3.5 Where the LABORATORY indicates that additional testing is advisable to obtain more valid or useful data, and where such testing has not been authorized, CLIENT agrees to view such test reports as inconclusive and preliminary.
- 3.6 The LABORATORY will supply technical service and prepare a report based solely on the sample submitted to the LABORATORY by the CLIENT. The CLIENT understands that application of the data to other devices is highly speculative and should be applied with extreme caution.
- 3.7 The LABORATORY agrees to exercise ordinary care in receiving, preserving and shipping (F.O.B. Littleton, MA) any sample to be tested, but assumes no responsibility for damages, either direct or consequential, which arise from loss, damage or destruction of the samples due to the act of examination, modification or testing, or technical services or circumstances beyond LABORATORY's control.
- 3.8 The LABORATORY will hold samples for thirty (30) days after tests are completed, or until the CLIENT's outstanding debts to the LABORATORY are satisfied, whichever is later.
- 3.9 The CLIENT recognizes that generally accepted error variances apply and agrees to consider such error variances in its use of test data.
- 3.10 It is agreed between LABORATORY and CLIENT that no distribution of any tests, reports or analysis other than that described below shall be made to any third party without the prior written consent of both parties unless such distribution is mandated by operation of law. It is agreed that tests, reports, or analysis results may be disclosed to third party auditors of the laboratory at the laboratory facility in the course of accreditation maintenance audits. No reference to reports or technical services of the LABORATORY shall be made in any advertising or promotional literature without the express written permission of the LABORATORY.
- 3.11 The CLIENT acknowledges that all employees of LABORATORY operate under employment contracts with the LABORATORY and CLIENT agrees not to solicit employment of such employees or to solicit information related to other clients from said employees.
- 3.12 In recognition of the relative risks and benefits of the project to both CLIENT and LABORATORY, the risks have been allocated such that the CLIENT agrees, to the fullest extent permitted by law, to limit the liability of the LABORATORY to the CLIENT for any and all claims, losses, costs, damages of any nature whatsoever or claims expenses from any cause or causes, including attorneys' fees and costs and expert witness fees and costs, so that the total aggregate liability of the LABORATORY to the CLIENT shall not exceed \$100,000, or the LABORATORY'S total fee for services rendered on this project, whichever is greater. It is intended that this limitation apply to any and all liability or cause of action however alleged or arising, unless otherwise prohibited by law.

### Paragraph 4. INSURANCE:

- 4.1 LABORATORY shall secure and maintain throughout the full period of the services provided to the CLIENT adequate insurance to protect it from claims under applicable Workmen's Compensation Acts and also shall maintain one million dollars of general liability coverage to cover claims for bodily injury, death or property damage as may arise from the performance of its services.
- 4.2 The CLIENT hereby warrants that it has sufficient insurance to protect its employees adequately under applicable Workmen's Compensation Acts and for bodily injury, death, or property damage.
- 4.3 No insurance of whatever kind or type, which may be carried by either party is to be considered as in any way limiting any other party's responsibility for damages resulting from their operations or for furnishing work and materials.

### Paragraph 5. PAYMENT:

- 5.1 CLIENT shall pay to LABORATORY such fees for services as previously agreed, orally or in writing, within 30 days of presentation of a bill for such services performed. In the event CLIENT ordered, orally or in writing, services but such services were not assigned a rate for billing, such services shall be billed at the LABORATORY's reasonable and customary rate.

5.2 CLIENT shall be responsible for all shipping, customs and other expenses related to services provided by LABORATORY to the CLIENT, and shall fully insure any test sample or other equipment provided to LABORATORY by the CLIENT.  
5.3 Amounts overdue from CLIENT to LABORATORY shall be charged interest at a rate of 1½% per month.

**Paragraph 6. ISO/IEC GUIDE 17025 ADDITIONS:**

6.1 CLIENT agrees that this test report will not be reproduced except in full, without written approval from the LABORATORY.  
6.2 CLIENT agrees that this test report shall not be used to claim product endorsement by A2LA or ANSI or any agency of the U.S. Government.  
6.3 CLIENT agrees that test results presented herein relate only to the sample tested by the LABORATORY.

## A2LA Accreditation

<p><u>SCOPE OF ACCREDITATION TO ISO/IEC 17025-1999</u></p> <p>CURTIS-STRAUS<sup>1</sup> 527 Great Road Littleton, MA 01460 Barry Quinlan Phone: 978-486-8880</p> <p><b>ELECTRICAL</b></p> <p>Valid until: July 31, 2005</p> <p>In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following <u>Electromagnetic Compatibility (EMC), Telecommunications, and Product Safety tests:</u></p> <p><b>Electromagnetic Compatibility (EMC)</b> Radiated emissions testing (electric and magnetic fields); Conducted emissions testing (voltage and current); Electrostatic Discharge testing; Electrical Fast Transient testing; Radiated Immunity testing; Conducted Immunity testing; Lightning Immunity testing; Voltage Dips, Interrupts and Voltage Variations testing; Magnetic Immunity testing; RF Power measurements; Frequency Stability measurements; Longitudinal Induction measurements; Harmonic emissions testing; Light flicker testing; Low frequency disturbance voltage testing; Disturbance Power measurements</p> <table border="1"> <thead> <tr> <th><u>EMC Standards</u></th><th><u>Title</u></th></tr> </thead> <tbody> <tr> <td>CISPR 22 1997 with amendments 1 and 2</td><td>Limits and methods of measurement of radio disturbance characteristics of information technology equipment.</td></tr> <tr> <td>CNS13438 1994</td><td>Limits and methods of measurement of radio interference characteristics of information technology equipment.</td></tr> <tr> <td>EN55022:1994 and 1998</td><td>Limits and methods of measurement of radio disturbance characteristics of information technology equipment.</td></tr> <tr> <td>SABS CISPR 22:1997</td><td>Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement</td></tr> <tr> <td>Canada ICES-003 1997 AS/NZS 3548 1995</td><td>Digital apparatus Australian/New Zealand Standard Limits and methods of measurement of radio disturbance characteristics of information technology equipment</td></tr> <tr> <td>CISPR 11 1990, 1997, 1999</td><td>Limits and methods of measurement of electromagnetic disturbance characteristics of industrial, scientific and medical (ISM) radio-frequency equipment.</td></tr> </tbody> </table> <p><sup>1</sup> Note: This accreditation covers testing performed at the laboratory listed above and the satellite facility located at 168 Ayer Rd, Littleton, MA 01460</p>			<u>EMC Standards</u>	<u>Title</u>	CISPR 22 1997 with amendments 1 and 2	Limits and methods of measurement of radio disturbance characteristics of information technology equipment.	CNS13438 1994	Limits and methods of measurement of radio interference characteristics of information technology equipment.	EN55022:1994 and 1998	Limits and methods of measurement of radio disturbance characteristics of information technology equipment.	SABS CISPR 22:1997	Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement	Canada ICES-003 1997 AS/NZS 3548 1995	Digital apparatus Australian/New Zealand Standard Limits and methods of measurement of radio disturbance characteristics of information technology equipment	CISPR 11 1990, 1997, 1999	Limits and methods of measurement of electromagnetic disturbance characteristics of industrial, scientific and medical (ISM) radio-frequency equipment.
<u>EMC Standards</u>	<u>Title</u>															
CISPR 22 1997 with amendments 1 and 2	Limits and methods of measurement of radio disturbance characteristics of information technology equipment.															
CNS13438 1994	Limits and methods of measurement of radio interference characteristics of information technology equipment.															
EN55022:1994 and 1998	Limits and methods of measurement of radio disturbance characteristics of information technology equipment.															
SABS CISPR 22:1997	Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement															
Canada ICES-003 1997 AS/NZS 3548 1995	Digital apparatus Australian/New Zealand Standard Limits and methods of measurement of radio disturbance characteristics of information technology equipment															
CISPR 11 1990, 1997, 1999	Limits and methods of measurement of electromagnetic disturbance characteristics of industrial, scientific and medical (ISM) radio-frequency equipment.															
(A2LA Cert. No. 1627-01) 10/31/03	Page 1 of 11	(A2LA Cert. No. 1627-01) 10/31/03														
		Page 2 of 11														
<p>CISPR 14-2 1996, 1997 + A1:2001</p> <p>CISPR 20: 1995, 2002 with amendment 3 (<i>associated group only</i>)</p> <p>EN 55020: 1995, 2002 (<i>associated group only</i>) CISPR 24</p> <p>SABS CISPR 24 1997</p> <p>AS/NZS 3200.1.2: 1995</p> <p><i>European Union Basic EMC Standards</i> EN 61000-4-2: 1995, 1999, 2001</p> <p>EN 61000-4-3:1997, 1998, 2002 AS/NZS 61000.4.3 1999</p> <p>EN 61000-4-4 1995</p> <p>EN 61000-4-5 1995 AS/NZS 61000.4.5 1999 EN 61000-4-6 1996 AS/NZS 61000.4.6 1999</p> <p>EN 61000-4-8 1994</p> <p>EN 61000-4-11 1994</p> <p>ENV 61000-2-2 1993</p> <p><i>EU Product Family Standards</i> EN 50081-1 1992</p> <p>EN 50081-2 1993</p> <p>EN 50082-1 1992, 1998</p> <p>EN 50082-2 1995</p>	<p>EN 61000-6-1: 1997, 2001</p> <p>EN 61000-6-2: 1998, 2001</p> <p>EN 50091-2 1996</p> <p>EN 55024 1998</p> <p>EN 55103-1 1997</p> <p>EN 55103-2 1997 (<i>excluding Annex A3</i>)</p> <p>EN 61326 1998</p> <p>EN 61547 1996</p> <p>EN 50130-4 1996</p> <p>EN 55104 1995</p> <p>EN 50083-2 1995</p> <p>EN 60601-1-2: 1993, 2002</p> <p>IEC 1800-3 1995</p> <p>EN 60555 Part 2 1987</p> <p>EN 60555 Part 3 1987</p> <p>EN 61000-3-2: 1995, 2000 AS/NZS 61000.3.2 1998</p> <p>EN 61000-3-3 1995 AS/NZS 61000.3.3 1999</p> <p>ETS 300 386-1 1994</p>	<p>Electromagnetic Compatibility (EMC)- Part 6: Generic standards-Section 1: Immunity for residential, commercial and light-industrial environments</p> <p>Electromagnetic Compatibility (EMC)- Part 6: Generic standards-Section 2: Immunity for industrial environments</p> <p>Specification for Uninterruptible Power Systems (UPS). Part 2: EMC requirements</p> <p>Information technology equipment – Immunity Characteristics – Limits and methods of measurement.</p> <p>Electromagnetic Compatibility – Product family standard for audio, video, audio-visual and entertainment lighting control apparatus for professional use. Part 1: Emission</p> <p>Electromagnetic Compatibility – Product family standard for audio, video, audio-visual and entertainment lighting control professional use. Part 2: Immunity</p> <p>Electrical equipment for measurement, control and laboratory use – EMC requirements</p> <p>Equipment for general lighting purposes – EMC immunity requirements</p> <p>Alarm Systems. Part 4: Electromagnetic compatibility. Product family standard: Immunity requirements for components of fire, intruder and social alarm systems.</p> <p>Electromagnetic compatibility immunity – requirements for household appliances, tools and similar apparatus. Product family standard.</p> <p>Cabled distribution systems for television and sound signals. Part 2: Electromagnetic compatibility for equipment</p> <p>Medical electrical equipment Part 1: general requirements for safety</p> <p>Section 2: Collateral standard: Electromagnetic compatibility – requirements and tests</p> <p>Adjustable speed electrical power drive systems. Part 3: EMC product standard including specific test methods.</p> <p>Disturbances in supply systems caused by household appliances and similar electrical equipment. Part 2: Harmonics</p> <p>Disturbances in supply systems caused by household appliances and similar electrical equipment. Part 3: Voltage fluctuations.</p> <p>Electromagnetic compatibility (EMC). Part 3: Limits Section 2: Limits for harmonic current emissions</p> <p>Electromagnetic compatibility (EMC). Part 3: Limits Section 2: Limitation of voltage fluctuations and flicker in low-voltage supply systems.</p> <p>Equipment Engineering (EE): Public telecommunication network equipment electro-magnetic compatibility (EMC) requirements Part 1: Product family overview, compliance criteria and test levels</p>														
(A2LA Cert. No. 1627-01) 10/31/03	Page 3 of 11	(A2LA Cert. No. 1627-01) 10/31/03														
		Page 4 of 11														

ETS EN 300 386-2 1997, 1998, ETS EN 300 386 2000 v1.2.1, 2001 v1.3.1	Electromagnetic compatibility and radio spectrum matters (ERM); Telecommunication network equipment; Electromagnetic compatibility (EMC) requirements; Part 2: Product family standard.	EN 300 328-2:2001 v1.2.1	Electromagnetic compatibility and Radio spectrum Matters (ERM); Wideband Transmission systems; Data transmission equipment operating in the 2.4 GHz ISM band and using spread spectrum modulation techniques; Part 2: Harmonized EN covering essential requirements under article 3.2 of the R&TTE Directive
ETS 300 132-1 1996	Equipment Engineering (EE); Power supply interface at the input to telecommunications equipment; Part 1: Operated by alternating current (ac) derived from direct current (dc) sources	EN 301 489-1:2002	Electromagnetic compatibility and Radio spectrum Matters (ERM); Electromagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements
ETS 300 132-2 1996	Equipment Engineering (EE); Power supply interface at the input to telecommunications equipment; Part 2: Operated by direct current (dc)	EN 60669-2-1:2002	Switches for household and similar fixed electrical installations -- Part 2-1: Particular requirements - Electronic switches
ETR 283 1997	Equipment Engineering (EE); Transient voltages at Interface A on telecommunications direct current (DC) power distributions.	<i>Canada Radio Standards</i> Canadian GL-36 1995	Industry Canada - technical requirements for low power Devices in the 2400 - 2483.5 MHz band.
<i>EU radio standards</i> (ETSI) EN 300 385 v1.2.1: 1998, 1999	Electromagnetic compatibility and Radio spectrum matters (ERM); Electromagnetic Compatibility (EMC) standard for fixed radio links and ancillary equipment (ETSI)	Canadian RSS-119 1999, 2000 Issue 6	Industry Canada - Land mobile and fixed radio Transmitters and receivers, 27.41 to 960.0 MHz
EN 300 330 v1.2.1: 1998, 1999	Electromagnetic compatibility and Radio spectrum matters (ERM); Short range devices (SRD); Technical characteristics and test methods for radio equipment in the range 9 kHz to 25 MHz and inductive loop systems in the frequency range 9 kHz to 30 MHz	Canadian RSS-134 1996 & 2000, Issue Rev 1	Industry Canada - 900 MHz narrowband personal communications services
ETS 300 328 1996	Radio Equipment and Systems (RES); Wideband transmission systems; Technical characteristics and test conditions for data transmission equipment operating in the 2.4 GHz ISM band and using spread spectrum modulation techniques	Canadian RSS-210 2000 Issue 3, RFS29 1998	Industry Canada - Low power license-exempt radio 2001 Issue 5 communication devices
ETS EN 300 440 v1.2.1 1999	Electromagnetic compatibility and Radio spectrum matters (ERM); Short range devices; Technical characteristics and test methods for radio equipment to be used in the 1 GHz to 40 GHz frequency range	Specification for Restricted Radiation Radio Apparatus (New Zealand)	
EN 301 893:2002 v1.2.1	Broadband Radio Access Networks (BRAN); 5 GHz (draft) high performance RLAN; Harmonized EN covering Essential requirements of article 3.2 of the R&TTE Directive	47 CFR FCC low power transmitters operating on frequencies below 1 GHz, emergency alert systems, unintentional radiators and ISM devices.	Scope A1
ETS 300 836-1:1998	Broadband Radio Access Networks (BRAN); High Performance Radio Local Area Network (HIPERLAN) Type 1; Conformance testing specification; Part 1: Radio Type approval and Radio Frequency (RF) conformance test specification	47 CFR FCC low power transmitters operating on frequencies above 1 GHz, with the exception of spread spectrum devices.	Scope A2
EN 301 489-17:2002 v1.2.1	Electromagnetic compatibility and Radio spectrum Matters (ERM); Electromagnetic Compatibility (EMC) standard for radio equipment and services; Part 17: Specific conditions for 2.4 GHz wideband transmission systems and 5 GHz high performance RLAN equipment	47 CFR FCC Unlicensed Personal Scope Communications System (PCS) devices	A3
(A2LA Cert. No. 1627-01) 10/31/03	Page 5 of 11	47 CFR FCC Unlicensed National Scope Information Infrastructure devices and low power transmitters using spread spectrum techniques.	A4
		47 CFR FCC Personal mobile Scope Radio Services in the following FCC Rule Parts 22, 24, 25, 27.	B1
		47 CFR FCC General Mobile Radio Scope Services in the following FCC Rule Parts 22, 74, 90, 95, 97.	B2
		47 CFR FCC Maritime and Aviation Scope RadioServices in 47 CFR Parts 80 and 87	B3
		47 CFR FCC Microwave Radio Services Scope in 47 CFR Parts 21, 74 and 101.	B4
		(A2LA Cert. No. 1627-01) 10/31/03	Page 6 of 11
FCC/OST MP-5 1986	FCC (Federal Communications Commission) methods Of measurement of radio noise emissions from industrial, scientific and medical equipment.	TIA/EIA-IS-968	Telecommunications Telephone Terminal Equipment Technical Requirements for Connection of Terminal Equipment to the Telephone Network
GR-1089-CORE: 1997, 1999 issue 2/ 2002 Issue 3	Bellcore electromagnetic compatibility and electrical safety - Generic criteria for network telecommunications equipment.	TIA/EIA-IS-883	Telecommunications Telephone Terminal Equipment Supplemental Technical Requirements for Connection of Stutter Dial Tone Detection Devices and ADSL Modems to the Telephone Network
<i>ANSI EMC Standards</i> ANSI C63.4: 1992, 1999, 2001	American National Standard for methods of measurement of radio-noise emissions for low-voltage electrical and electronic equipment in the range of 9 kHz to 40GHz.	TIA-968-A	Telecommunications Telephone Terminal Equipment Technical Requirements for Connection of Terminal Equipment to the Telephone Network
ANSI C63.5 1988	American National Standard for electromagnetic compatibility - radiated emissions measurements in electromagnetic interference (EMI) control - calibration of antennas.	T1.TRQ.6-2001	Technical Requirements for SHDSL, HDSL2, HDSL4 Digital Subscriber Line Terminal Equipment to Prevent Harm to the Telephone Network Industry
<i>IEEE EMC Standards</i> IEEE C62.41: 1980, 1991	IEEE recommended practice on surge voltages in low-voltage AC power circuits	Canada VDSL Issue 1 January 2003	Terminal Attachment Program Requirements and Test Methods for Very-High-Bit-Rate Digital Subscriber Line (VDSL) Terminal Equipment
<i>Swedish EMC Standards</i> BAKOM 3336.3 1995	Electromagnetic compatibility and electrical safety (EMC & S) for wired terminal equipment. Harmonization document information over the OFCOM requirements.	AS/ACIF S002-2001	Analogue interworking and non-interference requirements for Customer Equipment for connection to the Public Switched Telephone Network
<i>South African EMC standards other than CISPR equivalents</i> SABS 1718-1: 1996	South African Bureau of Standards: Specification for Gaming equipment. Part 1: Casino equipment.	AS/ACIF S016-2001	Requirements for Customer Equipment for connection to hierarchical digital interfaces
<i>Japanese VCCI Standards</i> VCCI V-3/99.05 1999 VCCI V-4/99.05 1999	Technical Requirements Instruction for Test Conditions for Requirement under Test	AS/ACIF S031-2001 AS/ACIF S038-2001 AS/ACIF S043-2001	Requirements for ISDN Basic Access Interface Requirements for ISDN Primary Rate Access Interface Requirements for Customer Equipment for Connection to a Metallic Local Loop Interface of a Telecommunications Network — Part 1: General Part 2: Broadband Part 3: DC, Low Frequency AC and Voiceband
<i>Telecommunications</i>	Telecommunications Registration; General test methods; Lightning surge; Drop testing; Balance testing; Signal power (metallic and longitudinal); Frequency measurements; Pulse templates; Leakage testing; Impedance testing; Hearing Aid Compatibility testing ( <i>excluding volume control</i> ); Protocol analysis and Jitter testing.	ITU-T G.703 HKTA 2028 HKTA 2029 TBR 1 : 1995	Physical/electrical characteristics of hierarchical Digital interfaces Network connection specification for connection of CPE to the PTNs in Hong Kong using digital leased circuits at data rate of 1544 kbit/s Network connection specification for connection of CPE to the PTNs in Hong Kong using digital leased circuits at data rate of 2048 kbit/s Attachment requirements for terminal equipment to be connected to circuit switched data networks and leased circuits using a CCITT Recommendation X.21 interface, or at an interface physically, functionally and electrically compatible with CCITT Recommendation X.21 but operating at any data signaling rate up to, and including, 1984 kbit/s
<i>Telecom Standards</i>	<i>Title</i>	TBR 2 : 1997	Attachment requirements for Data Terminal Equipment (DTE) to connect to Packet Switched Public Data Networks (PSPDNs) for CCITT Recommendation X.25 interfaces at data signaling rates up to 1 920 kbit/s utilizing interfaces derived from CCITT Recommendations X.21 and X.21 bit
FCC 47 CFR Part 68 Telephone	Connection of terminal equipment to the telephone Terminal Equipment network. Analog and Digital Equipment. TCB Scope C1.		
CS-03 Issue 8 1996 through amendment 5	Specification for terminal equipment, terminal systems, Network protection devices, connection arrangements and hearing aids compatibility.		
TIA/EIA TSB31-B 1998	Bulletin Part 68 Rationale and Measurement Guidelines (Feb 1998)		
(A2LA Cert. No. 1627-01) 10/31/03	Page 7 of 11	(A2LA Cert. No. 1627-01)	10/31/03 Page 8 of 11

TBR 3 : 1995 + Amdt : 1997	Integrated Services Digital Network (ISDN); Attachment requirements for terminal equipment to connect to an ISDN using ISDN basic access	IEC 60950 2000 EN 60950 1997, 1998, 2000 IEC 60950-1 2001 UL 60950-1 2003 CSA C22.2 No. 60950-00 CSA C22.2 No. 60950-1 03 AS/NZS 3260 1993	Safety of information technology equipment Safety of information technology equipment, including Electrical business equipment.
TBR 4 : 1995 + Amdt : 1997	Integrated Services Digital Network (ISDN); Attachment requirements for terminal equipment to connect to an ISDN using ISDN primary rate access		
TBR 012 : 1993 + Amdt : 1996	Business Telecommunications (BT); Open Network Provision (ONP) technical requirements; 2 048 kbit/s digital unstructured leased line (D2048U) Attachment requirements for terminal equipment	ACA TS 001 1997	Approval and test specification – Safety of information technology equipment including electrical business Equipment.
TBR 013 : 1996	Business TeleCommunications (BTC); 2 048 kbit/s digital structured leased lines (D2048S); Attachment requirements for terminal equipment interface	UL 1459 1995 IEC 1010-1 1990 IEC 61010-1 1993 EN 61010-1 1993, 2001 IEC 61010-1 2001 UL 61010B-1 2003	Approval and test specification – Safety of information technology equipment including electrical business equipment – Alphabetical reference index to IEC 950 (Supplement to AS/NZS 3260:1993)
TBR 21 : 1998	Terminal Equipment (TE); Attachment requirements for pan-European approval for connection to the analogue Public Switched Telephone Networks (PSTNs) of TE (excluding TE supporting the voice telephony service) in which network addressing, if provided, is by means of Dual Tone Multi Frequency (DTMF) signaling	UL 3101-1 1993 CAN/CSA 1010-1 1999 (Including AM 2) UL 3111-1 1996 UL 3121-1 1995	Australian Communications Authority – Safety requirements for customer equipment.
TBR 24 : 1997	Business TeleCommunications (BTC); 34 Mbit/s digital Unstructured and structured leased lines (D34U and D34S); Attachment requirements for terminal equipment interface	IEC 60601-1 1995 EN 60601-1 1995 (Including AM 2) UL 2601-1 1997 IEC 60065 1998, 2000 ANSI/UL 6500: 1998 CAN/CSA 60065-00 AS/NZS 3250 1995 AS/NZS 60065 2000	Telephone Equipment
Australia TS 002 : 1997	Analogue Interworking and Non interference Requirements for Customer Equipment Connected to the Public Switched Telephone Network	Canadian C22.2 No. 1-94 (1-98) 1998 EN 60065 1994	Safety requirements for electrical equipment for measurement, control and laboratory use, Part 1: General requirements.
TS 016 : 1997	General Requirements for Customer Equipment Connected to Hierarchical Digital Interfaces	IEC 60825 1990	Safety requirements for electrical equipment for measurement, control and laboratory use, Part 1: General requirements.
TS 031 : 1997	Requirements for ISDN Basic Access Interface	EN 60825-1 1994	Medical electrical equipment. Part 1: General requirements for safety.
TS 038 : 1997	Requirements for ISDN Primary Rate Access Interface	IEC 60825-1 2001	Medical electrical equipment
AS/ACIF S043.2:2001	Requirements for Customer Equipment for connection to a metallic loop interface of a Telecommunications Network – Part 2 Broadband	IEC 60825-2 2000-5 systems	Medical electrical equipment. Part 1: General requirements for safety.
<b>Product Safety</b>		IEC 60825-4 1997-11 IEC 60335-1 1995 (Including AM2 – 1997 & AM 12 – 1997)	Medical electrical equipment. Part 1: General Requirements for safety.
General test methods; Input tests; Electric strength tests; Impulse tests; Permanency of marking tests; Accessibility tests; Energy Hazard measurements; Capacitor discharge tests; Humidity conditioning; Earthing tests; Limited power source measurements; Stability tests; Steel ball tests; Lithium Battery Reverse Current measurements; Leakage current tests; Transformer abnormal tests; Telecom leakage tests; Over voltage/power cross tests ( <i>excluding x-ray tests</i> ).		Part 1: General requirements for safety.	
<b>Product Safety Standards</b>	<b>Title</b>		Medical electrical equipment. Part 1: General requirements for safety.
Specific Product Safety Standards			Medical electrical equipment. Part 1: General Requirements for safety.
IEC 950 1991	Safety of information technology equipment including Includes Amendments 1, 2, 3, and 4 electrical business equipment.		Medical electrical equipment. Part 1: General Requirements for safety.
UL 1950 1998	Safety of information technology equipment, including electrical business equipment.		Medical electrical equipment. Part 1: General Requirements for safety.
CSA C22.2 No.950-95	Safety of Information Technology Equipment (UL 1950)		Medical electrical equipment. Part 1: General Requirements for safety.
UL 60950 2000	Safety of information technology equipment		Medical electrical equipment. Part 1: General Requirements for safety.
(A2LA Cert. No. 1627-01) 10/31/03	Page 9 of 11	(A2LA Cert. No. 1627-01) 10/31/03	Page 10 of 11
UL 61010A-1 : 2002	Electrical equipment for laboratory use; part 1: General requirements		
EN 61010-1 : 2001	Safety requirements for electrical equipment for measurement, control, and laboratory use - Part 1: General requirements		
AS/NZS 60950 : 2000	Safety information technology equipment		
<b>Environmental<sup>2</sup></b>			
<b>Environmental Standards</b>	<b>Title</b>		
GR-63-CORE	NEBS Requirements: Physical Protection		
ETS 300 019	Environmental conditions and environmental tests For telecommunications equipment		
(A2LA Cert. No. 1627-01) 10/31/03	Page 11 of 11		

<sup>2</sup> Environmental testing is performed at the satellite facility located at 168 Ayer Rd, Littleton, MA 01460