



LCIE



Accreditation
N°1-1633
Scope available on
www.cofrac.fr

Template : March 5th, 2024

TEST REPORT

N°: 20585321-795321-A (FILE #7369122)

VERSION: 01

Subject Radio spectrum tests according to the standards:
FCC CFR 47 Part 15.247 & ANSI C63.10
RSS-247 & RSS-Gen

Issued to

IJINUS

25 ZA de Kervidanou 3
29300 – MELLAC
FRANCE

Apparatus under test

- ↳ Product
- ↳ Trade mark
- ↳ Manufacturer
- ↳ Model under test
- ↳ Serial number
- ↳ FCCID
- ↳ IC

DATALOGGER & PRESSURE RECORDER
IJINUS
IJINUS
H0102
IJH0102-0000 0122
SE6H001
10983-H001

Conclusion

See Test Program chapter

Test date April 15, 2024 to April 17, 2024
Test location LCIE Grenoble
FCC Test site FR0008 - 918017 (MOI)
ISED Test site 6500A (MOI)
Sample receipt date April 10, 2024
Composition of document 51 pages
Document issued on May 27, 2024

Written by :

Majid MOURZAGH
Tests operator



Approved by :

Anthony MERLIN
Technical manager



Reproduction of this document is only authorized in its complete form. Any partial reproduction or any insertion of results in an accompanying text with a view to their distribution must receive prior and formal agreement from LCIE. This document results from tests carried out on a specimen, sample or test piece. It does not prejudge the conformity of all the products manufactured to the object tested. Unless otherwise indicated or rule specified by the test method, the decision of conformity does not take into account measurement uncertainty. It in no way prejudices a certification decision. The accreditation of the COFRAC Testing Section attests to the technical competence of the laboratories for the tests covered by the accreditation only. If certain tests mentioned in this report were carried out outside the framework of COFRAC accreditation, they are identified by the symbol

LCIE

Laboratoire Central des Industries Electriques
Une société Bureau Veritas

Z.I Centr'Alp

170, Rue de Chatagnon
38430 Moirans
FRANCE

Tél. + 33 4 76 07 36 36

contact@lcie.fr

www.lcie.fr



L C I E

PUBLICATION HISTORY

Version	Date	Author	Modification
01	May 27, 2024	Majid MOURZAGH	Creation of the document

Each new edition of this test report replaces and cancels the previous edition. The control of the old editions of report is under responsibility of client.



L C I E

SUMMARY

1.	TEST PROGRAM	4
2.	EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER)	5
3.	DUTY CYCLE	10
4.	OCCUPIED BANDWIDTH	13
5.	6DB BANDWIDTH	16
6.	MAXIMUM CONDUCTED OUTPUT POWER	19
7.	POWER SPECTRAL DENSITY	22
8.	UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS	26
9.	UNWANTED EMISSIONS IN RESTRICTED FREQUENCY BANDS	30
10.	UNCERTAINTIES CHART	51



1. TEST PROGRAM

References

- 47 CFR Part 15.247 (2023)
- RSS 247 Issue 3
- RSS Gen Issue 5
- KDB 558074 D01 DTS Meas Guidance v05r02 [\[p\]](#)
- KDB 662911 D01 Multiple Transmitter Output v02r01 [\[p\]](#)
- ANSI C63.10 (2013)

Radio requirement:

Clause - Test Description	Test result - Comments	
Occupied Bandwidth	ISED	PASS
6dB Bandwidth	FCC & ISED	PASS
Duty Cycle	FCC & ISED	PASS
Maximum Conducted Output Power	FCC & ISED	PASS
Power Spectral Density	FCC & ISED	PASS
Unwanted Emissions in Non-Restricted Frequency Bands	FCC & ISED	PASS
Unwanted Emissions in Restricted Frequency Bands	FCC & ISED	PASS
Receiver Radiated Emissions	ISED	PASS(2)

This table is a summary of test report, see conclusion of each clause of this test report for detail.

(1) Limited program

(2) Testing covered the receive mode, and receiver spurious emissions are considered to be the same as transmitter.

PASS: EUT complies with standard's requirement

FAIL: EUT does not comply with standard's requirement

NA: Not Applicable

NP: Test Not Performed



2. EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER)

2.1. INFORMATIONS

-Tests are performed on the most complete product IJINUS, SN: IJH0102-0000 0122. See Table below for difference between products.

We, IJINUS, declare that all the following products (PMNs) are based on the same electronics card and same mechanical basis. The products are electrically based on a mother board shared by all the A0102 products. This mother board manages the global control, the memory, and the ISM radio short range communication. Depending on the needed functionalities different peripherals can be added to the common basis.


Below are listed the specific features of all the PMNs:

PMN	Features
BLUEV4-LP	Data logger with internal pressure sensor
BLUEV4	Data logger without internal pressure sensor



2.2. HARDWARE IDENTIFICATION (EUT AND AUXILIARIES):

Equipment under test (EUT):

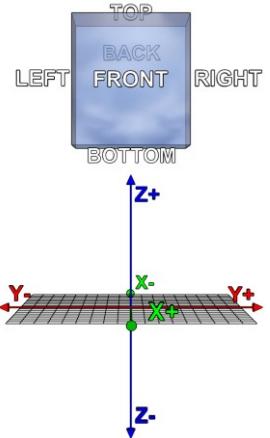Model under test:	H0102
Serial Number:	IJH0102-0000 0122
	 
Dimensions:	116cm x 52cm x 220cm (Length x Width x Height)
Type:	Table-Top

Power supply:

Name	Type	Rating	Reference / Sn	Comments
Supply1	Battery	3.6V	FANSO ER34615H-2+1025	/

NC: Not communicated by provider

Inputs/outputs - Cable:

Access	Type	Length used (m)	Declared <3m	Shielded	Comments
Access1	12 wires	2.5	No	No	/

NC: Not communicated by provider



L C I E

Equipment information (declaration of provider):

DTS:	ISM short range radio
Chipset / RF Module	ST – S2LP
Frequency band:	[902-928] MHz
Spectrum Modulation:	Chirp Spread Spectrum
Number of Channel:	1
Spacing channel:	/
Channel bandwidth:	0.6
Antenna Type:	Internal
Antenna connector:	Temporary for tests
Antenna requirements §15.203	Conducted Method (welded connection, according to manufacturer's requirements)
Transmit chains:	1
Receiver chains	1

CHANNEL PLAN	
Channel	Frequency (MHz)
Cnom	915

DATA RATE	
Modulation Type	
GFSK	

Antenna Characteristic			
Antenna reference	Gain (dBi)	Frequency Band (MHz)	Impedance(Ω)
Molex 2081420001	1.8	902-928	50

Hardware information					
Highest internal frequency (PLL, Quartz, Clock, Microprocessor...):	F_{Highest}:	80	MHz		
Firmware (if applicable):	V:	>22.2			
Software (if applicable):	V:	NA			
Equipment intended:	Mobile				
Type of equipment:	Stand-alone				
Equipment sample:	Production model				
Duty cycle:	Continuous duty				
Operating temperature range:	T_{min}:	-40 °C			
	T_{nom}:	20°C			
	T_{max}:	+85 °C			
Operating voltage:	V_{nom}:	3.6V			

NC: Not communicated by provider



L C I E

2.3. RUNNING MODE

Test mode	Description of test mode
Test mode 1	Permanent emission with modulation on a fixed channel in the data rate that produced the highest power.
Test mode 2	Permanent reception

Test	Running mode
Occupied Bandwidth	Test mode 1
6dB Bandwidth	Test mode 1
Maximum Conducted Output Power	Test mode 1
Power Spectral Density	Test mode 1
Conducted Spurious Emission at the Band Edge	Test mode 1
Unwanted Emissions in Non-Restricted Frequency Bands	Test mode 1
Unwanted Emissions in Restricted Frequency Bands	Test mode 1
Receiver Radiated Emissions	Test mode 2 (1)

(1) Testing covered the receive mode, and receiver spurious emissions are considered to be the same as transmitter.

2.4. EQUIPMENT LABELLING

Label
None

2.5. EQUIPMENT MODIFICATIONS DURING THE TESTS

None



2.6. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follow:

$$FS = RA + AF + CF - AG$$

Where:

FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Factor

AG = Amplifier Gain

Example:

Assume a receiver reading of 52.5dB μ V is obtained. The antenna factor of 7.4 and a cable factor of 1.1 are added. The amplifier gain of 29dB is subtracted, giving a field strength of 32 dB μ V/m.

$$FS = 52.5 + 7.4 + 1.1 - 29 = 32 \text{ dB}\mu\text{V/m}$$

The 32 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

2.7. TEST DISTANCE EXTRAPOLATION – FCC/ISED

The field strength is extrapolated to the new measurement distance using formula from FCC Part15.31 (f) and §6.5-6.6 RSS-GEN:

Below 30MHz,

$$FS_{\text{limit}} = FS_{\text{max}} - 40 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

Above 30MHz,

$$FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

Where:

FS_{limit} is the calculation of field strength at the limit distance, expressed in dB μ V/m

FS_{max} is the measured field strength, expressed in dB μ V/m

d_{measure} is the distance of the measurement point from the EUT

d_{limit} is the reference limit distance

2.8. CALIBRATION DATE

The calibration intervals are extended at 12+2 months. This extended interval is based on the fact that there is sufficient calibration data to statistically establish a trend or based on experience of use of the test equipment to assure good measurement results for a longer period.

2.9. METHOD TO DETERMINE THE SPURIOUS RADIATED EMISSION

The Normalized Site Attenuation (NSA) is added to the maximum values observed during the azimuth search in order to obtain the spurious radiated emission. For spurious above -6dB from the limit found with the NSA, the Substitution Method is applied.

The substitution antenna replaces the equipment under test (EUT) for Effective Radiated Power (ERP) or Effective Isotropically Radiated Power (EIRP) measurement following the standard. Power is measured for a high level and calculated for the same level of radiated field strength obtained on the measuring antenna and EUT.



L C I E

3. DUTY CYCLE

3.1. TEST CONDITIONS

Date of test : April 16, 2024
Test performed by : Majid MOURZAGH
Relative humidity (%) : 39
Ambient temperature (°C) : 22

3.2. TEST SETUP


The Equipment Under Test is installed in an anechoic chamber.
Measurement is performed with a spectrum analyzer in conducted method.

The EUT is turned ON, the center frequency of the spectrum analyzer is set to the fundamental frequency.
The captured power is measured and recorded.

Test Procedure:

ANSI C63.10 § 11.6

- Zero-span mode
- RBW \geq OBW if possible; otherwise, set RBW to the largest available value
- VBW \geq RBW
- Detector = Peak
- Trace mode = Max Hold.
- Sweep time $> 3 *$ Period time anticipated
- Sweep = Single
- Trigger Video

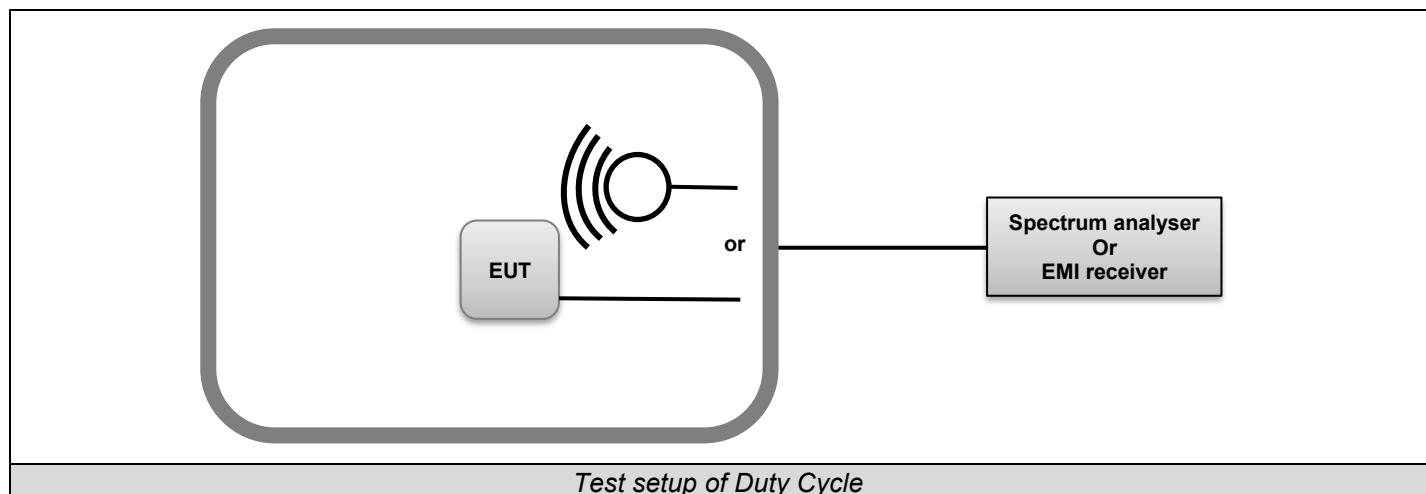

Test setup of Duty Cycle



L C I E



Photo of Duty Cycle

3.3. LIMIT

None

3.4. TEST EQUIPMENT LIST

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Attenuator 10dB	AEROFLEX	—	A7122268	07/23	07/25
Full Anechoic Room	SIEPEL	—	D3044024		
SMA 1.5m	SUCOFLEX	18GHz	A5329864	10/23	10/24
SMK 0.8m	TELEDYNE	A84-0505-0.8MTR	A5330054	04/23	04/24
SMK 1.2m (Ampl <> chamber)	HUBER-SUHNER	SUCOFLEX 102	A5330062	04/23	04/26
Spectrum analyzer	ROHDE & SCHWARZ	FSV 30	A4060051	02/24	02/26
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	05/23	05/25


3.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None



L C I E

3.6. RESULTS

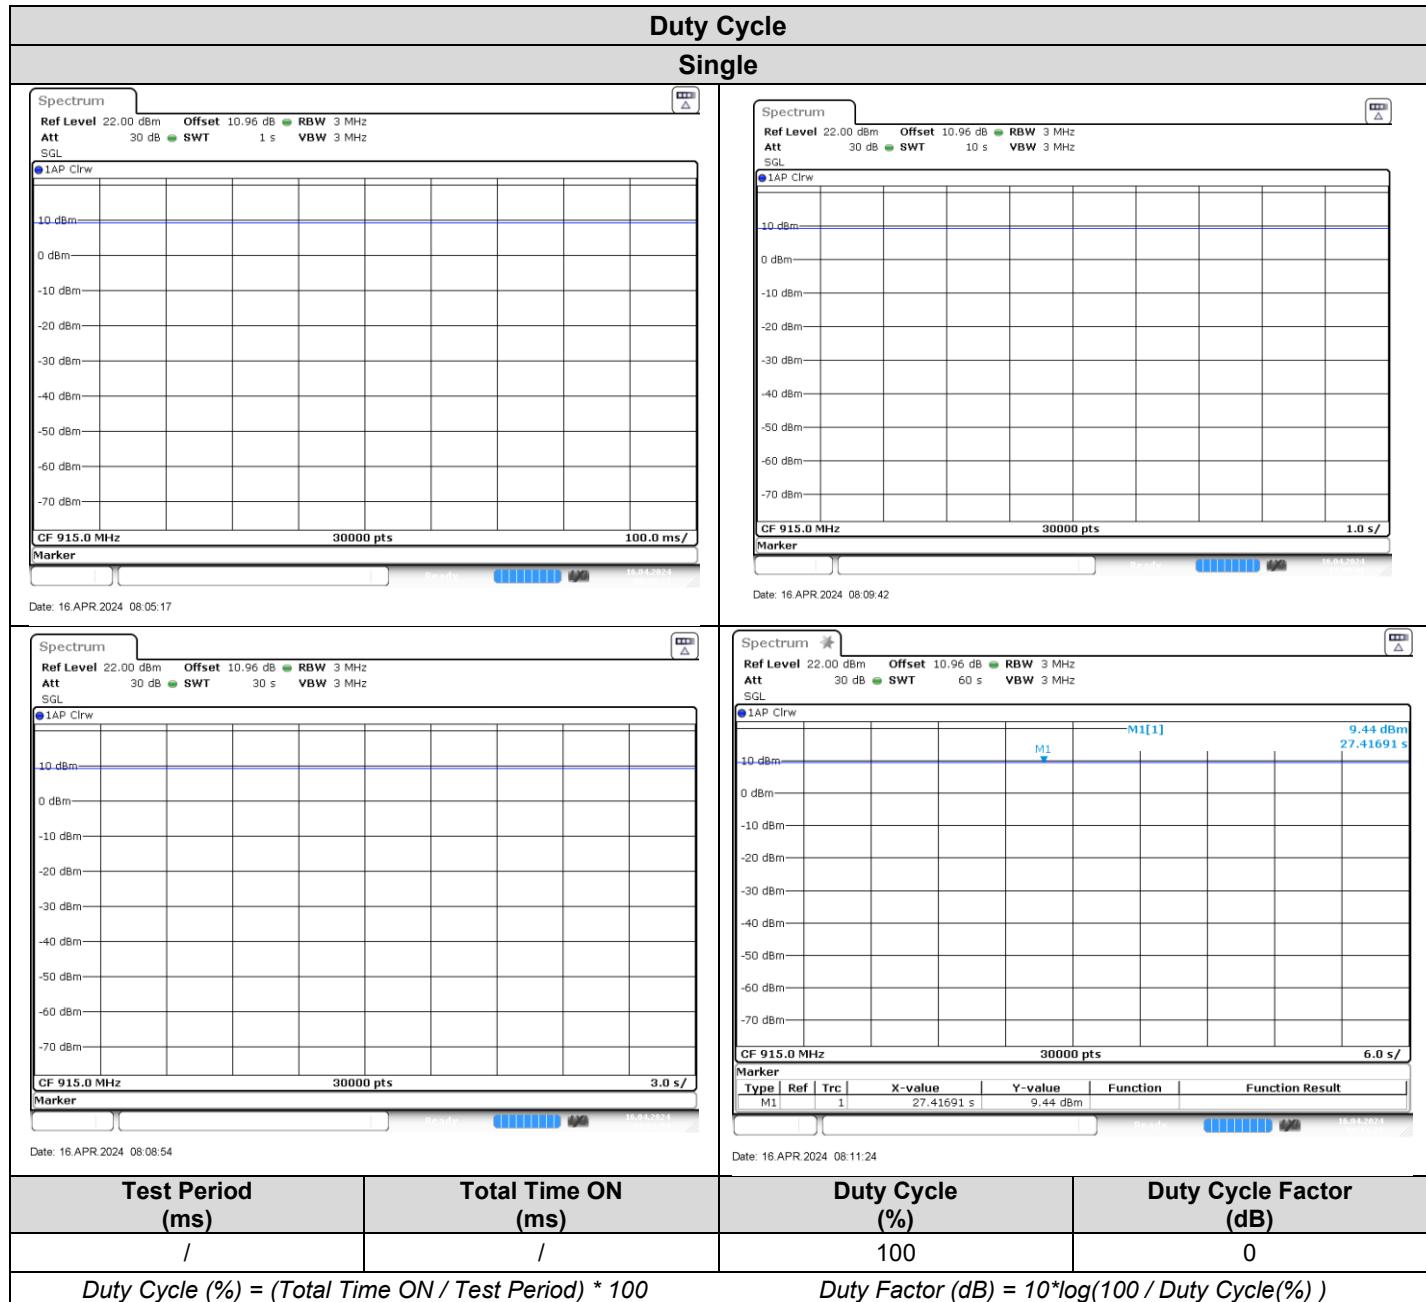



4. OCCUPIED BANDWIDTH

4.1. TEST CONDITIONS

Date of test : April 16, 2024
Test performed by : Majid MOURZAGH
Relative humidity (%) : 39
Ambient temperature (°C) : 22

4.2. TEST SETUP


The Equipment Under Test is installed in an anechoic chamber.
Measurement is performed with a spectrum analyzer in conducted method.

The EUT is turned ON, the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

Test Procedure:

ANSI C63.10 § 6.9.2 and RSS-Gen Issue 5 § 6.7

- RBW used in the range of 1% to 5% of the anticipated emission bandwidth
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = Max Hold.
- Sweep = Auto couple.
- Allow the trace to stabilize.
- OBW 99% function of spectrum analyzer used

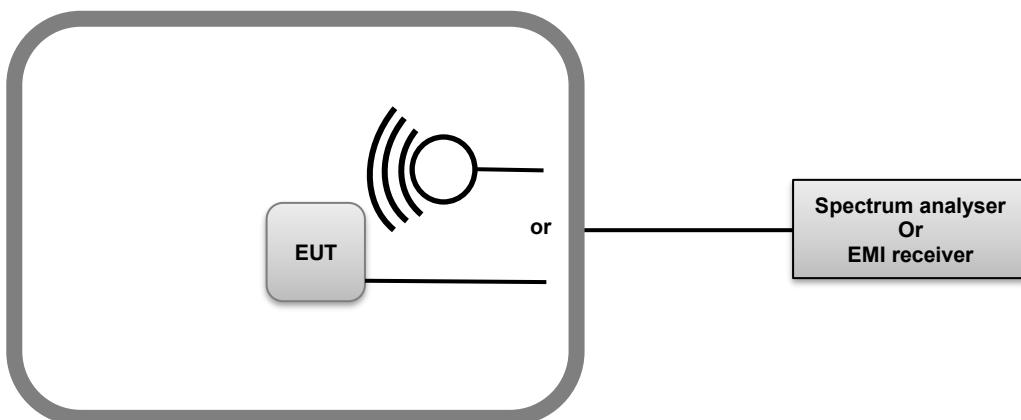

Test setup of Occupied Bandwidth

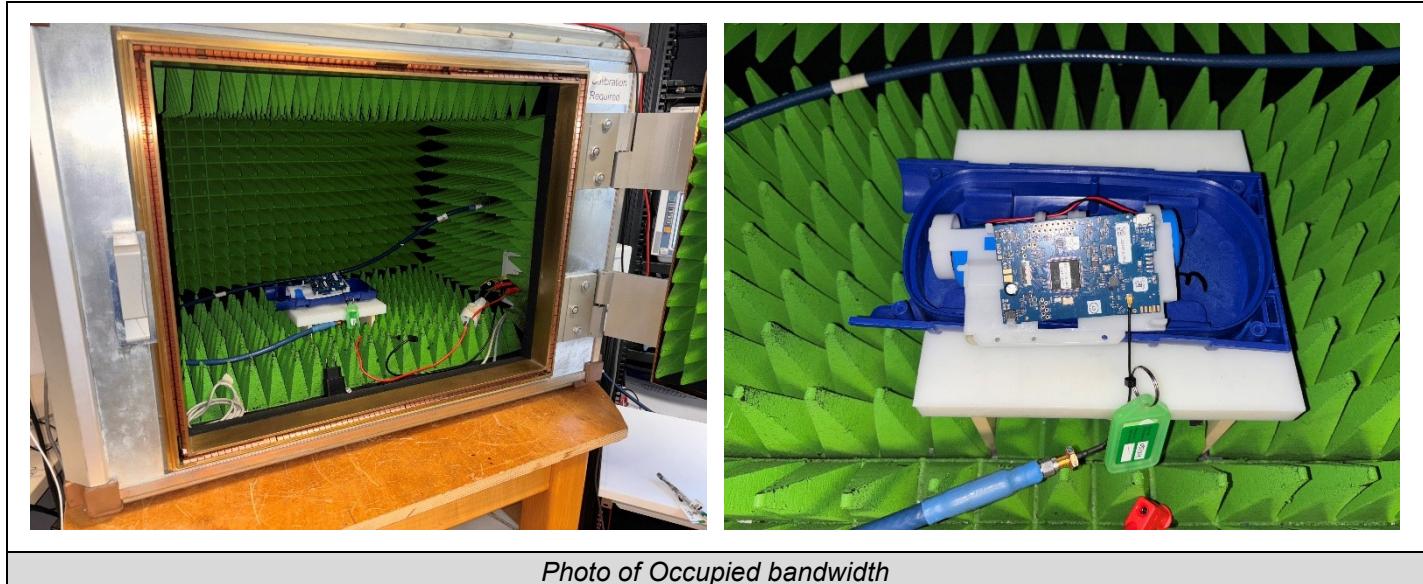


Photo of Occupied bandwidth

4.3. LIMIT

None

4.4. TEST EQUIPMENT LIST

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Attenuator 10dB	AEROFLEX	—	A7122268	07/23	07/25
Full Anechoic Room	SIEPEL	—	D3044024		
SMA 1.5m	SUCOFLEX	18GHz	A5329864	10/23	10/24
SMK 0.8m	TELEDYNE	A84-0505-0.8MTR	A5330054	04/23	04/24
SMK 1.2m (Ampl <> chamber)	HUBER-SUHNER	SUCOFLEX 102	A5330062	04/23	04/26
Spectrum analyzer	ROHDE & SCHWARZ	FSV 30	A4060051	02/24	02/26
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	05/23	05/25


4.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None



L C I E

4.6. RESULTS

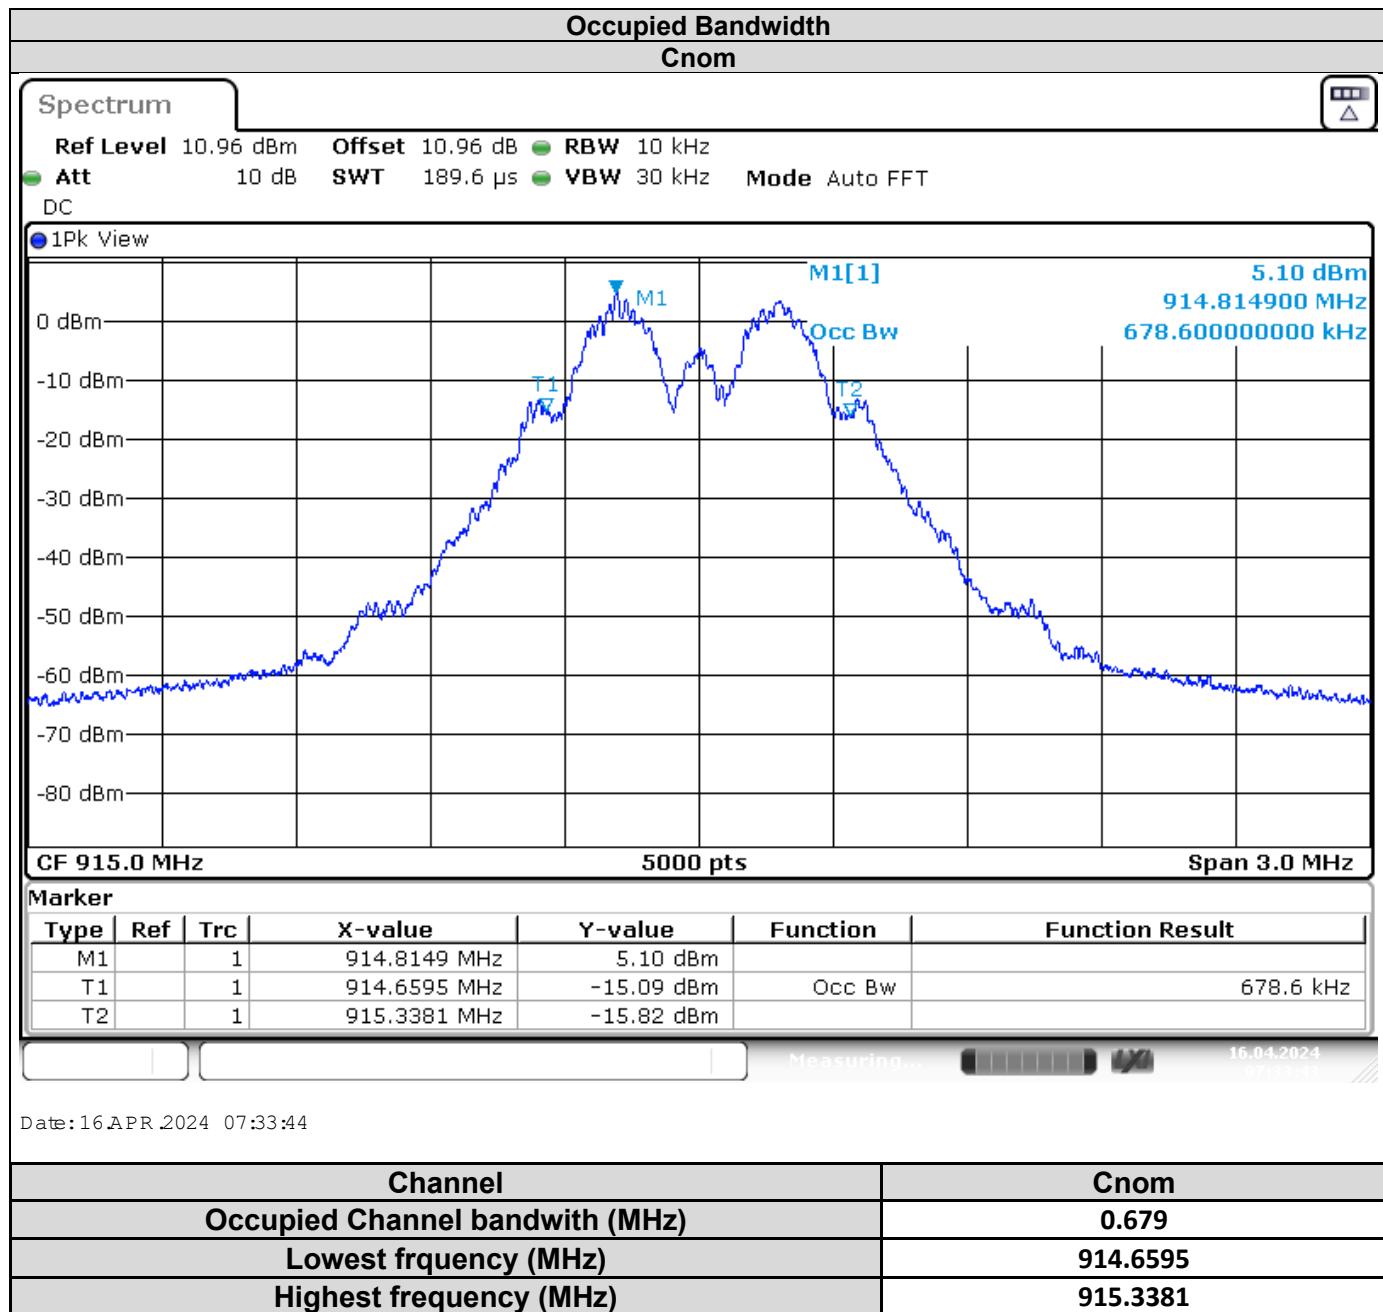

4.7. CONCLUSION

Occupied Channel Bandwidth measurement performed on the sample of the product **H0102**, Sn: **IJH0102-0000 0122**, in configuration and description presented in this test report, show levels **compliant** to the **RSS-GEN** limits.



L C I E

5. 6dB BANDWIDTH

5.1. TEST CONDITIONS

Date of test : April 16, 2024
Test performed by : Majid MOURZAGH
Relative humidity (%) : 39
Ambient temperature (°C) : 22

5.2. TEST SETUP


The Equipment Under Test is installed in an anechoic chamber.
Measurement is performed with a spectrum analyzer in conducted method.

The EUT is turned ON, the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

Test Procedure:

KDB 558074 D01 DTS Meas Guidance v05r02 § 8.2

- Set resolution bandwidth (RBW) = 100kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. Compare the resultant bandwidth with the RBW setting of the analyzer.

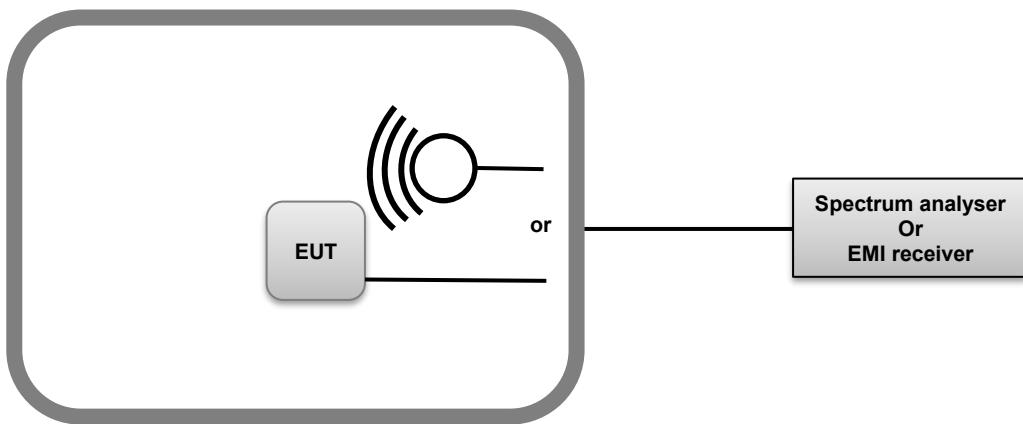

Test setup of 6dB Bandwidth



L C I E



Photo of 6dB bandwidth

5.3. LIMIT

Frequency range	6dB bandwidth
902-928MHz 2400MHz to 2483.5MHz 5725-5850 MHz	≥500kHz

5.4. TEST EQUIPMENT LIST

TEST EQUIPMENT USED						
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due	
Attenuator 10dB	AEROFLEX	—	A7122268	07/23	07/25	
Full Anechoic Room	SIEPEL	—	D3044024			
SMA 1.5m	SUCOFLEX	18GHz	A5329864	10/23	10/24	
SMK 0.8m	TELEDYNE	A84-0505-0.8MTR	A5330054	04/23	04/24	
SMK 1.2m (Ampl <-> chamber)	HUBER-SUHNER	SUCOFLEX 102	A5330062	04/23	04/26	
Spectrum analyzer	ROHDE & SCHWARZ	FSV 30	A4060051	02/24	02/26	
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	05/23	05/25	


5.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None



L C I E

5.6. RESULTS

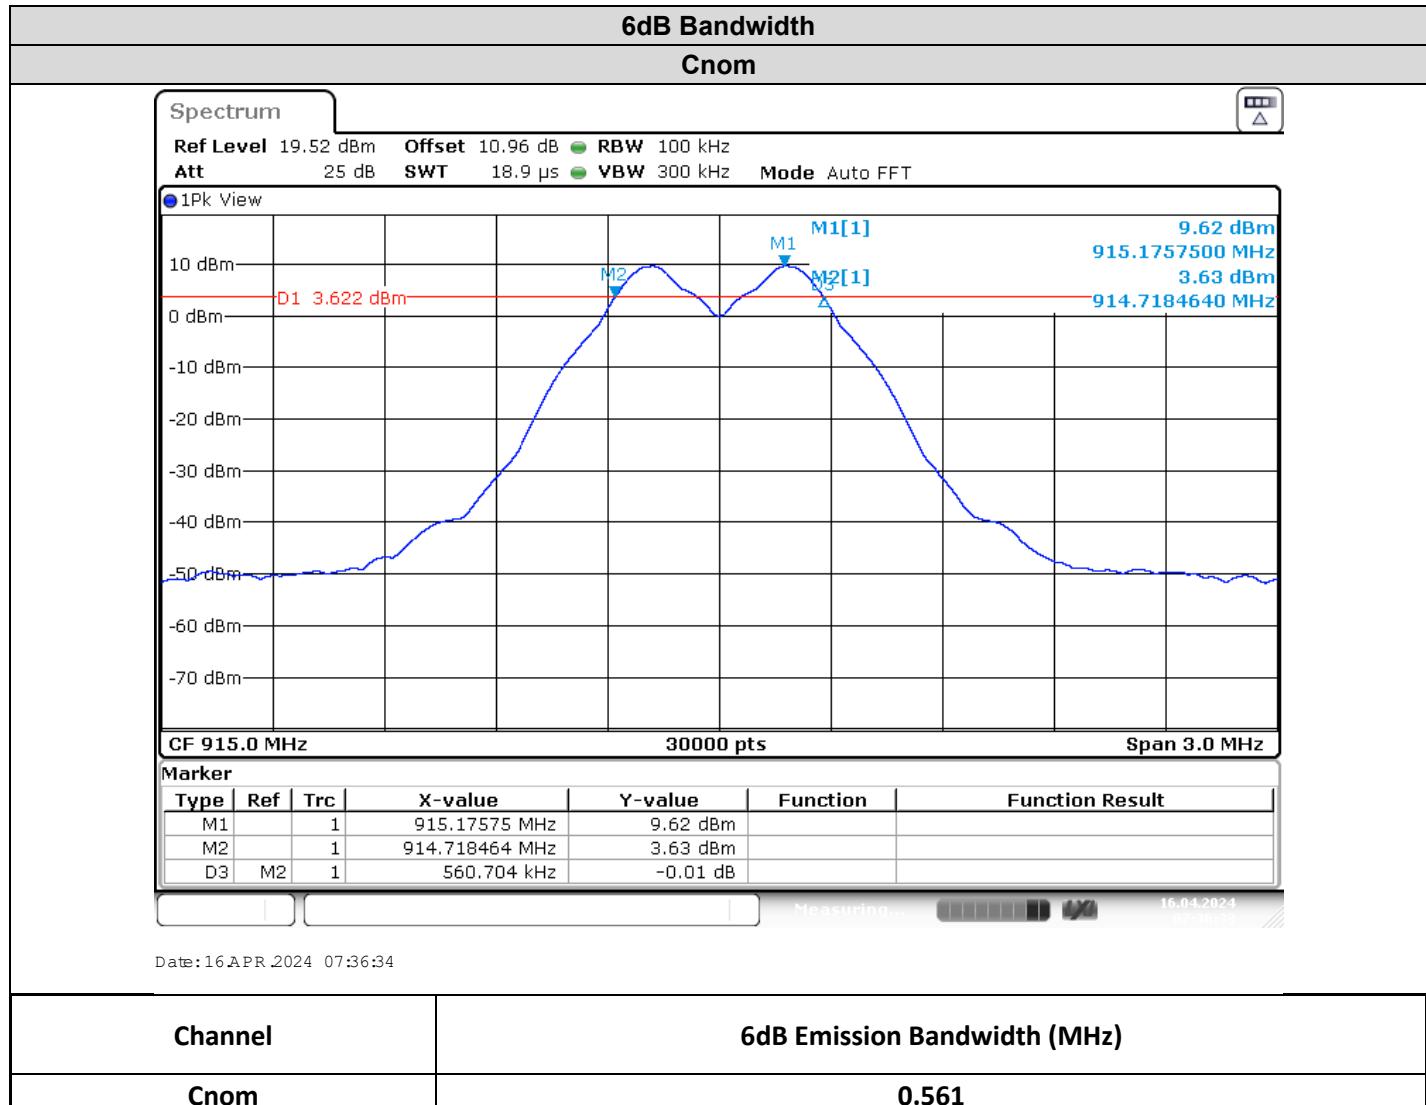

5.7. CONCLUSION

6dB Bandwidth measurement performed on the sample of the product **H0102**, Sn: **IJH0102-0000 0122**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247** limits.



L C I E

6. MAXIMUM CONDUCTED OUTPUT POWER

6.1. TEST CONDITIONS

Date of test : April 16, 2024
Test performed by : Majid MOURZAGH
Relative humidity (%) : 39
Ambient temperature (°C) : 22

6.2. TEST SETUP

The Equipment Under Test is installed in an anechoic chamber.
Measurement is performed with a spectrum analyzer in conducted method.


The EUT is turned ON, the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

Test Procedure used: KDB 558074 D01 DTS Meas Guidance v05r02 § 8.3.1.1

KDB 558074 D01 DTS Meas Guidance v05r02 § 8.3.1.1

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- Set the RBW \geq DTS bandwidth.
- Set VBW $\geq 3 \times$ RBW.
- Set span $\geq 3 \times$ RBW
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

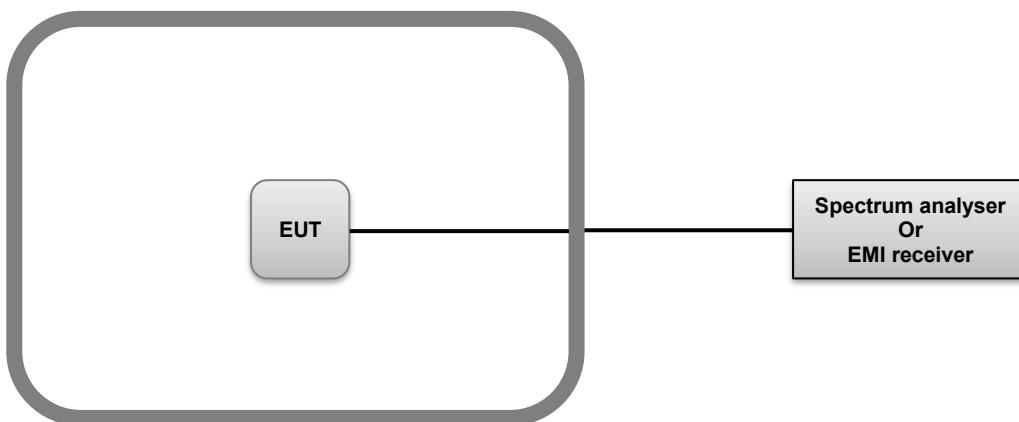

Test setup of Maximum Conducted Output Power



L C I E

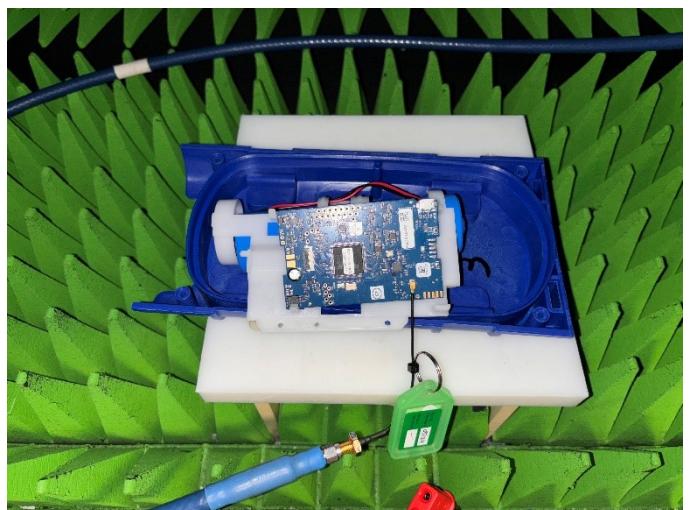


Photo of Maximum Conducted Output Power

6.3. LIMIT

Frequency range	Maximum Conducted Output Power
902-928MHz 2400MHz to 2483.5MHz 5725-5850 MHz	≤30dBm*

*Remark: Limits are reduced by G-6dBi if Overall Antenna Gain above 6dBi

6.4. TEST EQUIPMENT LIST

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Attenuator 10dB	AEROFLEX	—	A7122268	07/23	07/25
Full Anechoic Room	SIEPEL	—	D3044024		
SMA 1.5m	SUCOFLEX	18GHz	A5329864	10/23	10/24
SMK 0.8m	TELEDYNE	A84-0505-0.8MTR	A5330054	04/23	04/24
SMK 1.2m (Ampl <-> chamber)	HUBER-SUHNER	SUCOFLEX 102	A5330062	04/23	04/26
Spectrum analyzer	ROHDE & SCHWARZ	FSV 30	A4060051	02/24	02/26
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	05/23	05/25


6.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None



L C I E

6.6. RESULTS

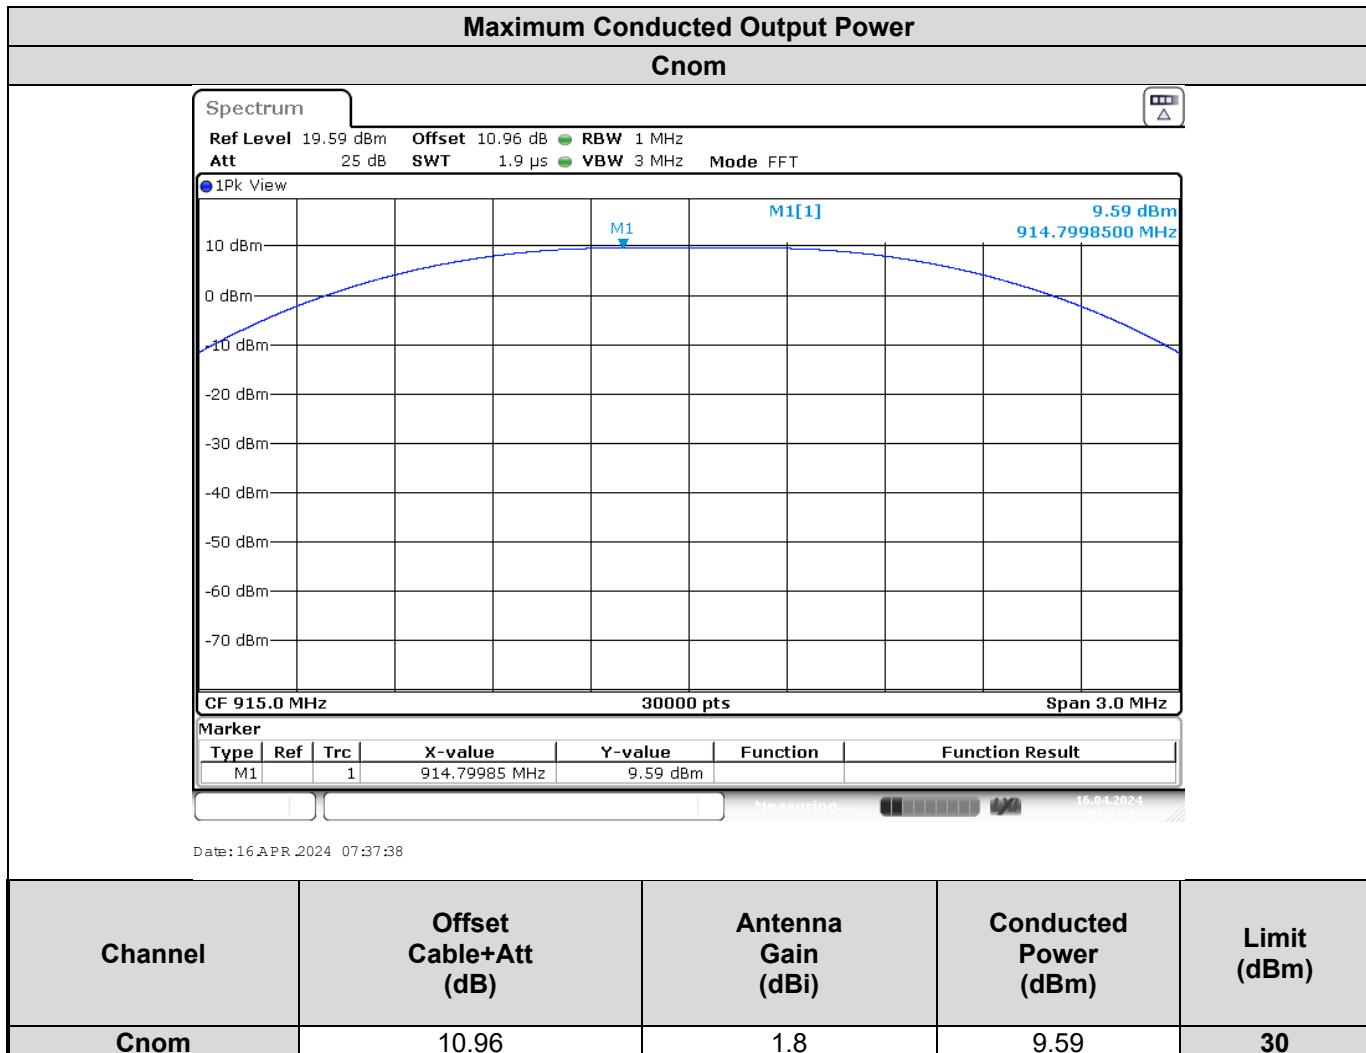

6.7. CONCLUSION

Maximum Output Conducted Power measurement performed on the sample of the product **H0102**, Sn: **IJH0102-00000122**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247** limits.



7. POWER SPECTRAL DENSITY

7.1. TEST CONDITIONS

Date of test : April 16, 2024
Test performed by : Majid MOURZAGH
Relative humidity (%) : 39
Ambient temperature (°C) : 22

7.2. TEST SETUP

The Equipment Under Test is installed in an anechoic chamber.
Measurement is performed with a spectrum analyzer in conducted method.

The EUT is turned ON, the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

Test Procedure used: KDB 558074 D01 DTS Meas Guidance v05r02 § 8.4 (Method PKPSD)

KDB 558074 D01 DTS Meas Guidance v05r02 § 8.4 (Method PKPSD)

Subclause 11.10 of ANSI C63.10 is applicable


- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: 3 kHz.
- Set the VBW $\geq 3 \times$ RBW.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

KDB 558074 D01 DTS Meas Guidance v05r02 § 8.4 (Method AVGPSD-1)

Subclause 11.10 of ANSI C63.10 is applicable

Method AVGPSD-1 uses trace averaging with EUT transmitting at full power throughout each sweep. The following procedure may be used when the maximum (average) conducted output power was used to determine compliance to the fundamental output power limit. This is the baseline method for determining the maximum (average) conducted PSD level. If the instrument has a power averaging (rms) detector, then it must be used; otherwise, use the sample detector. The EUT must be configured to transmit continuously ($D \geq 98\%$), or else sweep triggering/signal gating must be implemented to ensure that measurements are made only when the EUT is transmitting at its maximum power control level (no transmitter OFF time to be considered):

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = power averaging (rms) or sample detector (when rms not available).
- f) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (rms) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

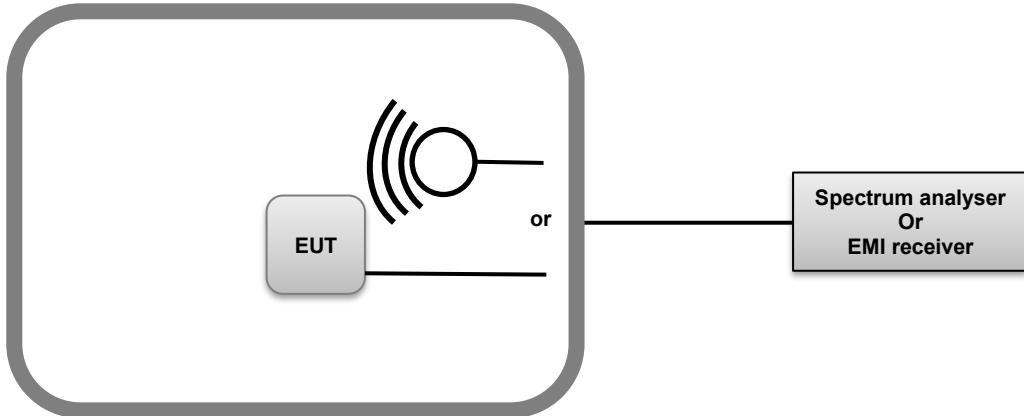

Test setup of Power Spectral Density



Photo of Power Spectral Density

7.3. **LIMIT**

Frequency range	Power Spectral Density
902-928MHz 2400MHz to 2483.5MHz 5725-5850 MHz	$\leq 8\text{dBm} / 3\text{kHz}$ *

*Remark: Limits are reduced by G-6dBi if Overall Antenna Gain above 6dBi



L C I E

7.4. TEST EQUIPMENT LIST

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Attenuator 10dB	AEROFLEX	—	A7122268	07/23	07/25
Full Anechoic Room	SIEPEL	—	D3044024		
SMA 1.5m	SUCOFLEX	18GHz	A5329864	10/23	10/24
SMK 0.8m	TELEDYNE	A84-0505-0.8MTR	A5330054	04/23	04/24
SMK 1.2m (Ampl <> chamber)	HUBER-SUHNER	SUCOFLEX 102	A5330062	04/23	04/26
Spectrum analyzer	ROHDE & SCHWARZ	FSV 30	A4060051	02/24	02/26
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	05/23	05/25


7.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None



L C I E

7.6. RESULTS

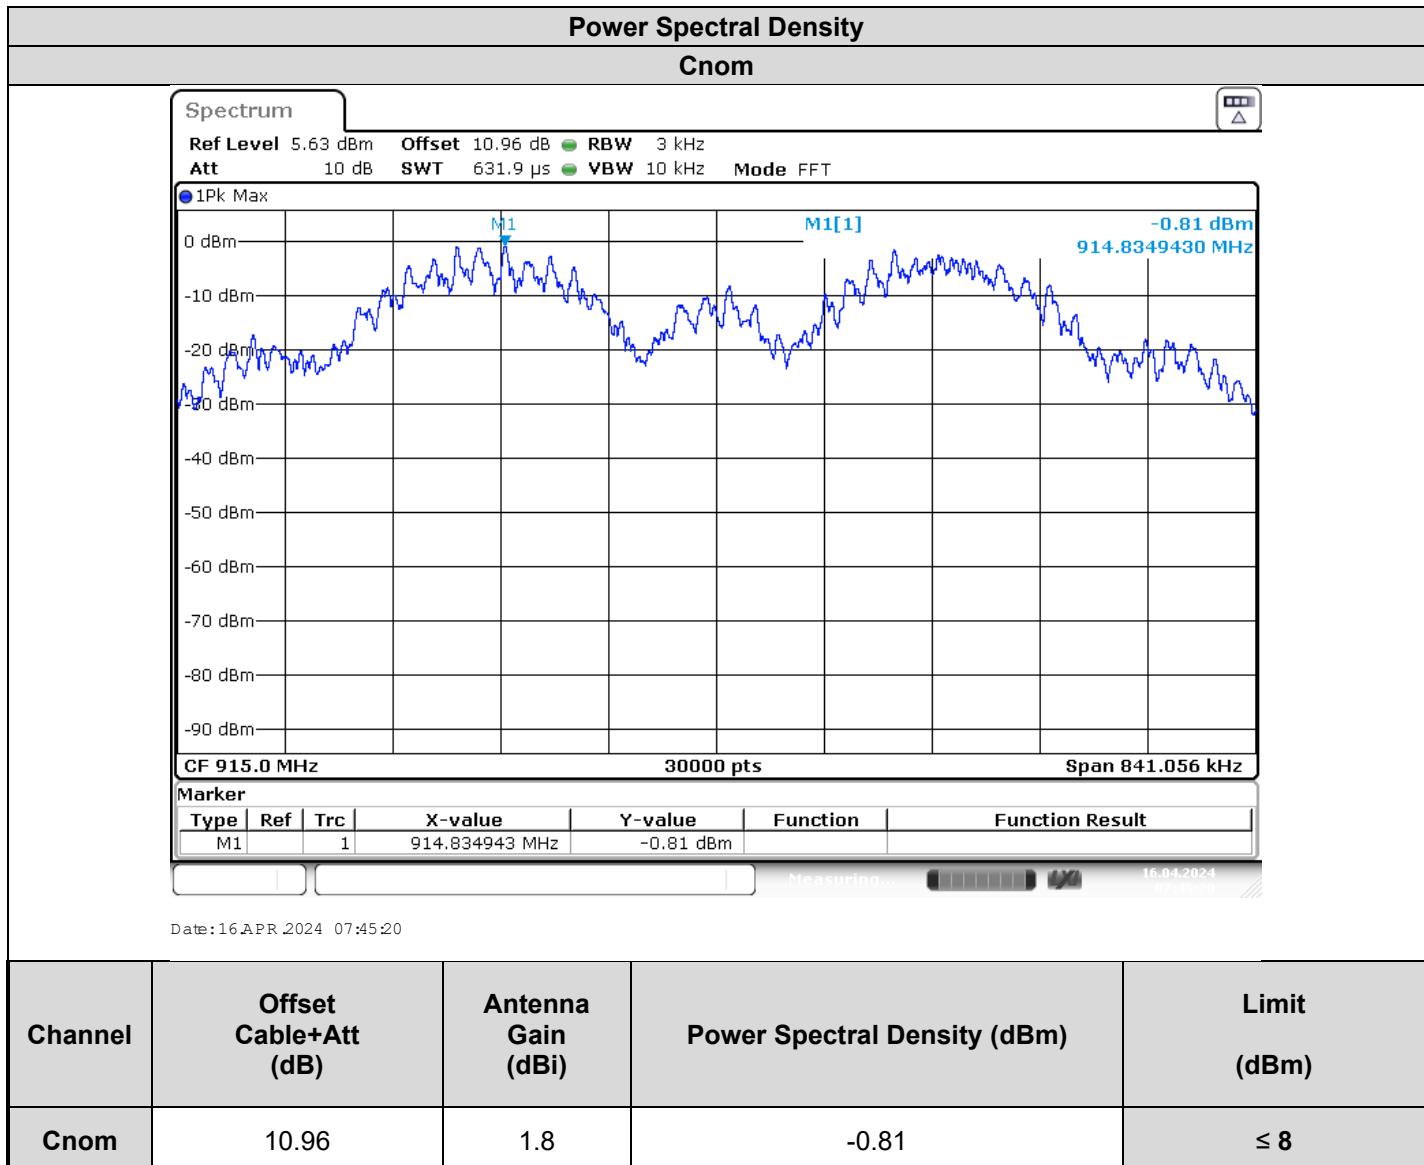

7.7. CONCLUSION

Power Spectral Density measurement performed on the sample of the product **H0102**, Sn: **IJH0102-0000 0122**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247** limits.



8. UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

8.1. TEST CONDITIONS


Date of test : April 16, 2024
Test performed by : Majid MOURZAGH
Relative humidity (%) : 39
Ambient temperature (°C) : 22

8.2. TEST SETUP

The Equipment Under Test is installed in an anechoic chamber.
Measurement is performed with a spectrum analyzer in conducted method.

The EUT is turned ON, the captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

Test Procedure:
KDB 558074 D01 DTS Meas Guidance v05r02 § 8.5

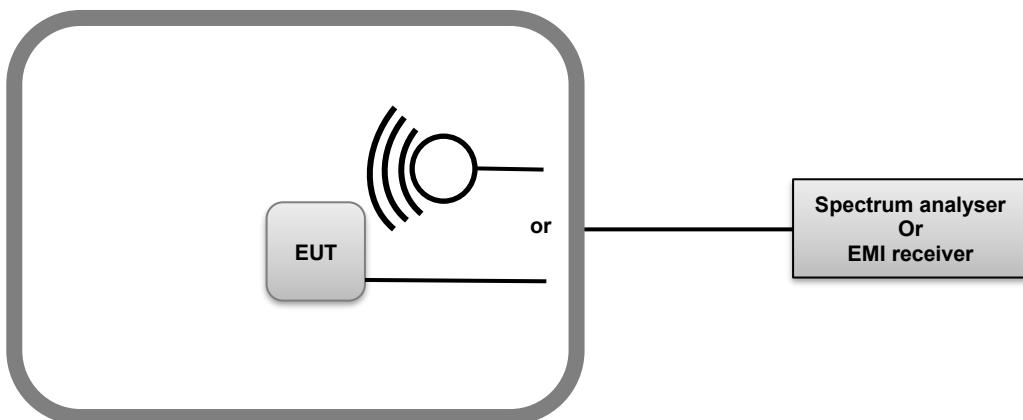

Test setup of Unwanted emissions in non-restricted frequency bands



L C I E



Photo of Unwanted emissions in non-restricted frequency bands

8.3. LIMIT

All Spurious Emissions must be at least 20dB below the Fundamental Radiator Level at the Band Edge of operating frequency band and in non-restricted bands.

8.4. TEST EQUIPMENT LIST

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Attenuator 10dB	AEROFLEX	—	A7122268	07/23	07/25
Full Anechoic Room	SIEPEL	—	D3044024		
SMA 1.5m	SUCOFLEX	18GHz	A5329864	10/23	10/24
SMK 0.8m	TELEDYNE	A84-0505-0.8MTR	A5330054	04/23	04/24
SMK 1.2m (Ampl <-> chamber)	HUBER-SUHNER	SUCOFLEX 102	A5330062	04/23	04/26
Spectrum analyzer	ROHDE & SCHWARZ	FSV 30	A4060051	02/24	02/26
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	05/23	05/25

8.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION


None



L C I E

8.6. RESULTS


8.6.1. At the band edge

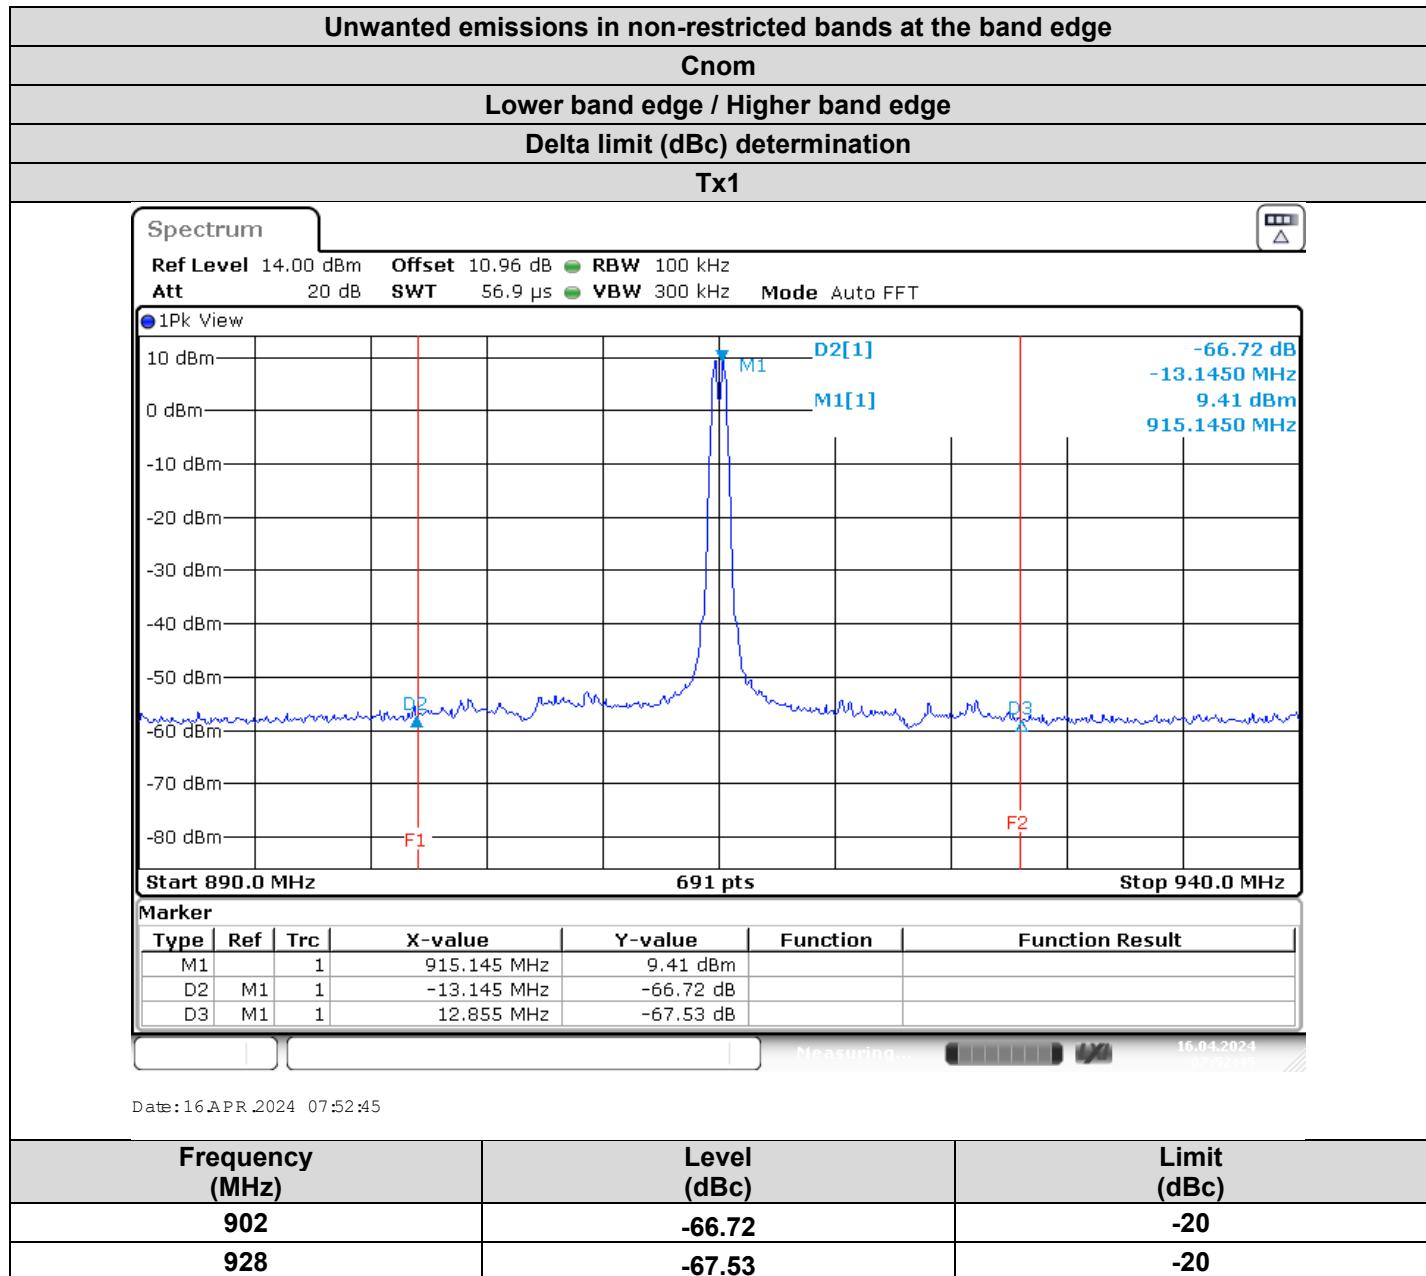



L C I E

8.6.2. Non restricted frequency bands

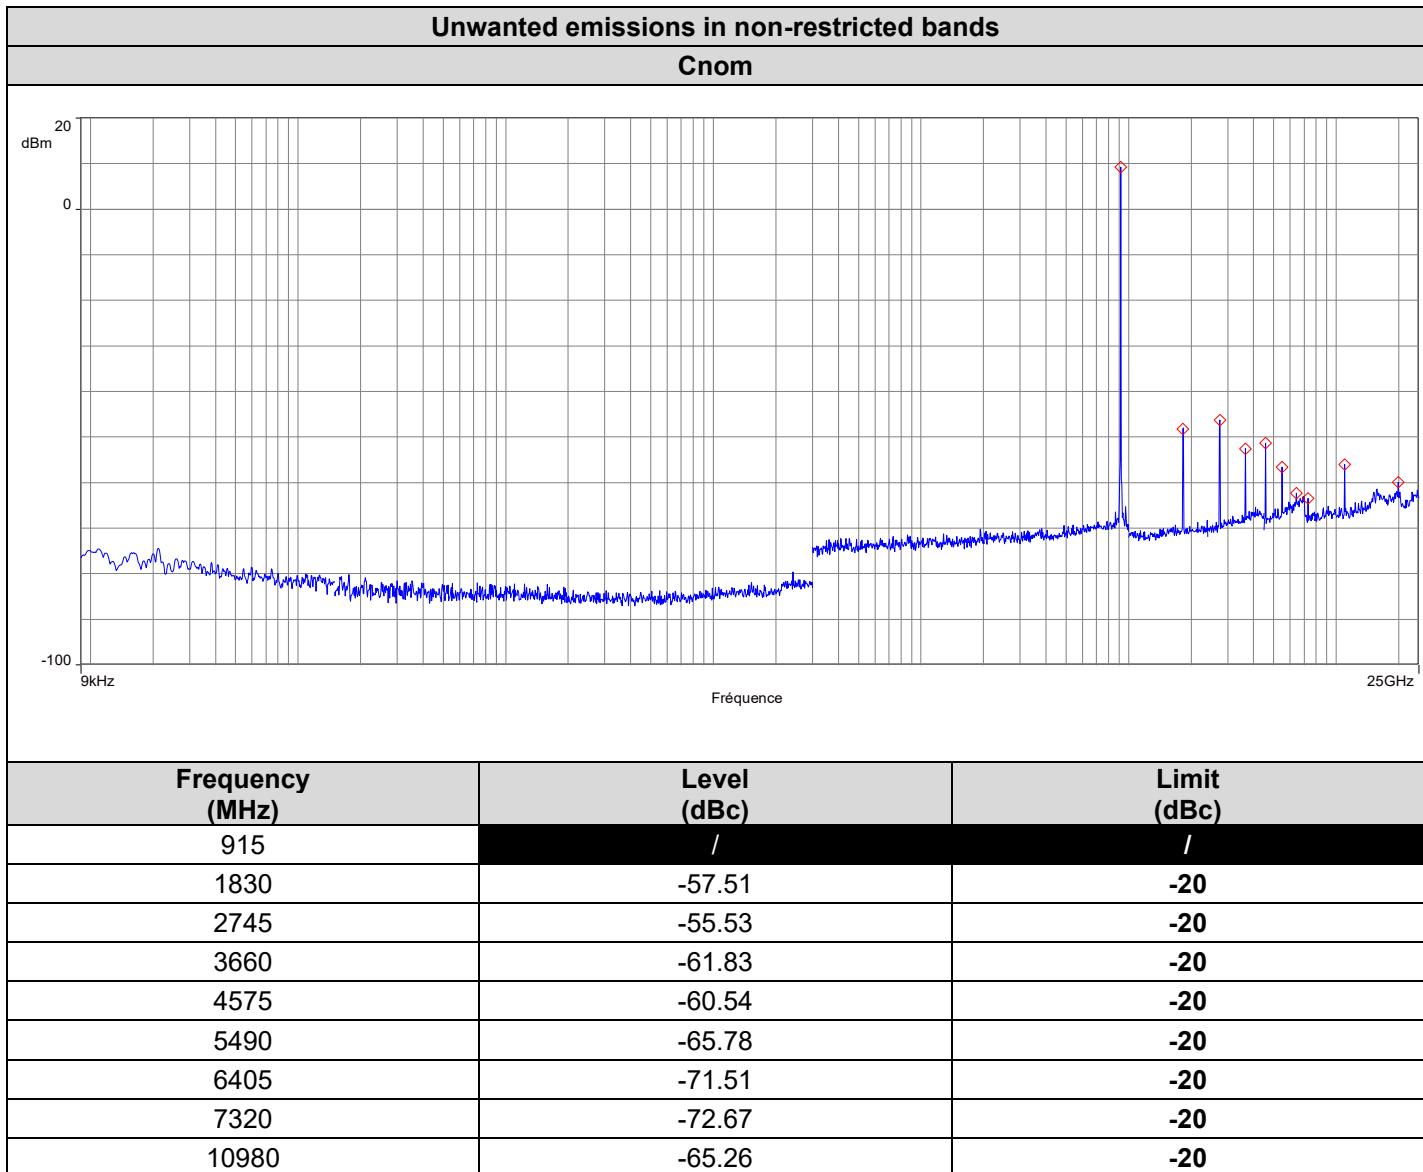

8.7. CONCLUSION

Unwanted emissions in non-restricted bands and at the band edge measurement performed on the sample of the product **H0102**, Sn: **IJH0102-0000 0122**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247** limits.



9. UNWANTED EMISSIONS IN RESTRICTED FREQUENCY BANDS

9.1. TEST CONDITIONS

Date of test : April 17, 2024
Test performed by : Majid MOURZAGH
Relative humidity (%) : 42
Ambient temperature (°C) : 21

9.2. TEST SETUP

Test procedure:
ANSI C63.10 & FCC Part 15 subpart C

Following frequency ranges, test setup parameters are different and specified in this table:

Frequency range:	9kHz to 30MHz	
Test:	Pre-Characterization	Qualification
Antenna Polarization:	Parallel, Perpendicular and Ground parallel	
Antenna Height:	Centered on EUT (§6.6.5 ANSI C63-10)	1m
Antenna Type:	Loop	
RBW Filter:	200Hz below 150kHz / 9kHz above 150kHz	
Maximization:	Turntable rotation of 360 degrees range and all axis of EUT used in normal configuration	
EUT height:	1.5m	1.5m
Test site:	Full Anechoic Chamber	Open Aera Test Site
Distance EUT - Antenna:	3m	3m
Detector:	Peak	QPeak

Frequency range:	30MHz to 1GHz	
Test:	Pre-Characterization	Qualification
Antenna Polarization:	Horizontal and Vertical	
Antenna Height:	Centered on EUT (§6.6.5 ANSI C63-10)	Varied from 1m to 4m
Antenna Type:	Biconical & Bi-Log	
RBW Filter:	120kHz	
Maximization:	Turntable rotation of 360 degrees range and all axis of EUT used in normal configuration	
EUT height:	1.5m	0.8m
Test site:	Full Anechoic Chamber	Open Aera Test Site
Distance EUT - Antenna:	3m	3m
Detector:	Peak	QPeak




L C I E

Frequency range:	1GHz to 14GHz	
Test:	Pre-Characterization	Qualification
Antenna Polarization:	Horizontal and Vertical	
Antenna Height:	Centered on EUT (§6.6.5 ANSI C63-10)	Centered on EUT (§6.6.5 ANSI C63-10)
Antenna Type:	Horn	
RBW Filter:	1MHz	
Maximization:	Turntable rotation of 360 degrees range and all axis of EUT used in normal configuration	
EUT height:	1.5m	1.5m
Test site:	Full Anechoic Chamber	Full Anechoic Chamber
Distance EUT - Antenna:	3m	3m
Detector:	Peak & Average	Peak & Average

Frequency range:	14GHz to 25GHz	
Test:	Pre-Characterization	Qualification
Antenna Polarization:	Horizontal and Vertical	
Antenna Height:	Centered on EUT (§6.6.5 ANSI C63-10)	Centered on EUT (§6.6.5 ANSI C63-10)
Antenna Type:	Horn	
RBW Filter:	1MHz	
Maximization:	Turntable rotation of 360 degrees range and all axis of EUT used in normal configuration	
EUT height:	1.5m	1.5m
Test site:	Full Anechoic Chamber	Full Anechoic Chamber
Distance EUT - Antenna:	1m	1m
Detector:	Peak & Average	Peak & Average



L C I E

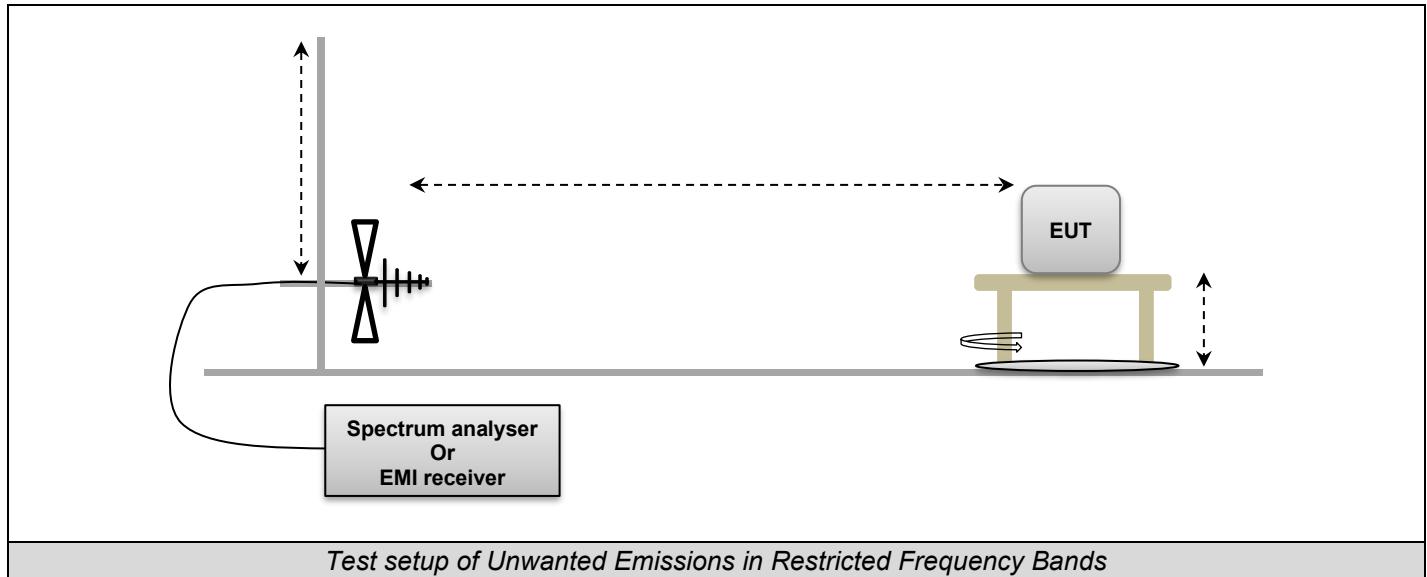



L C I E

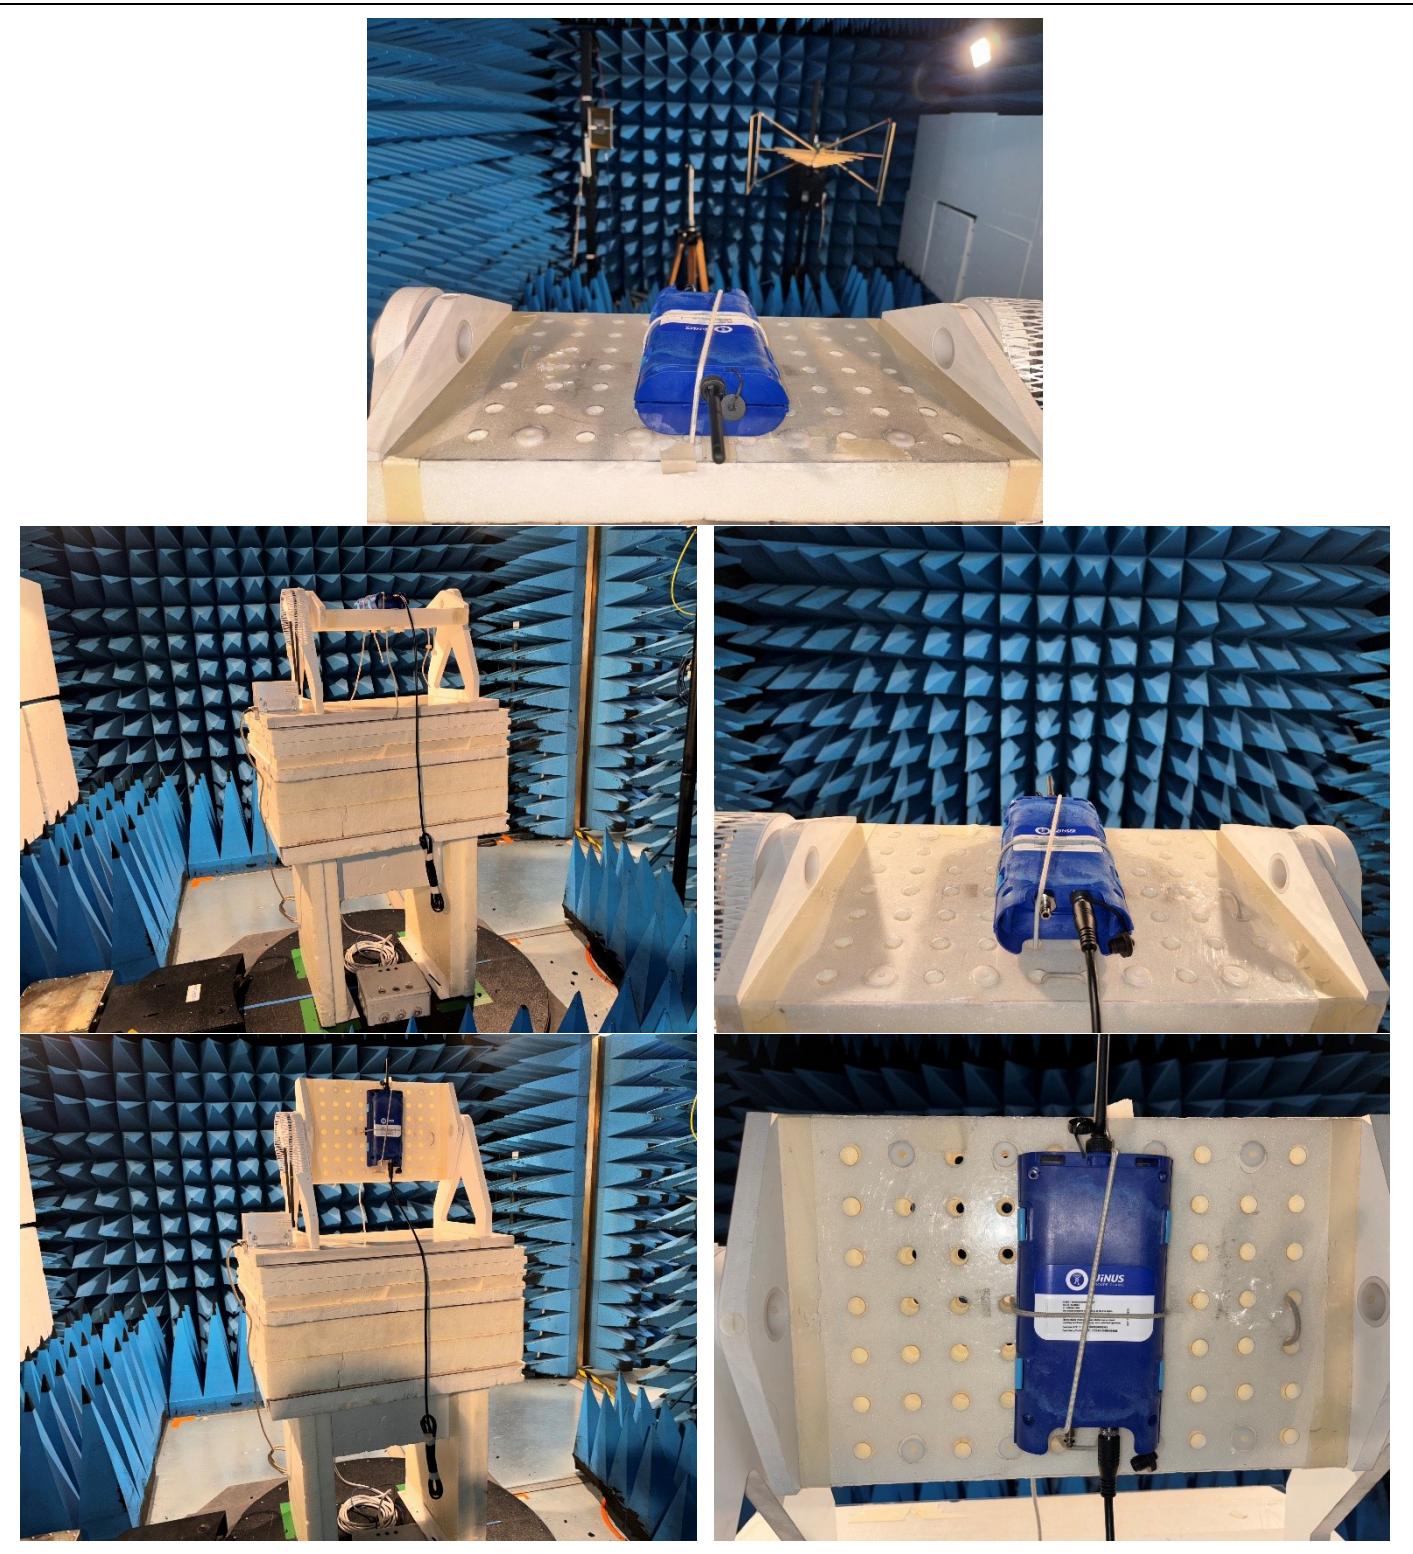


Photo of Unwanted Emissions in Restricted Frequency Bands on FAR



L C I E



Photo of Unwanted Emissions in Restricted Frequency Bands on OATs



L C I E

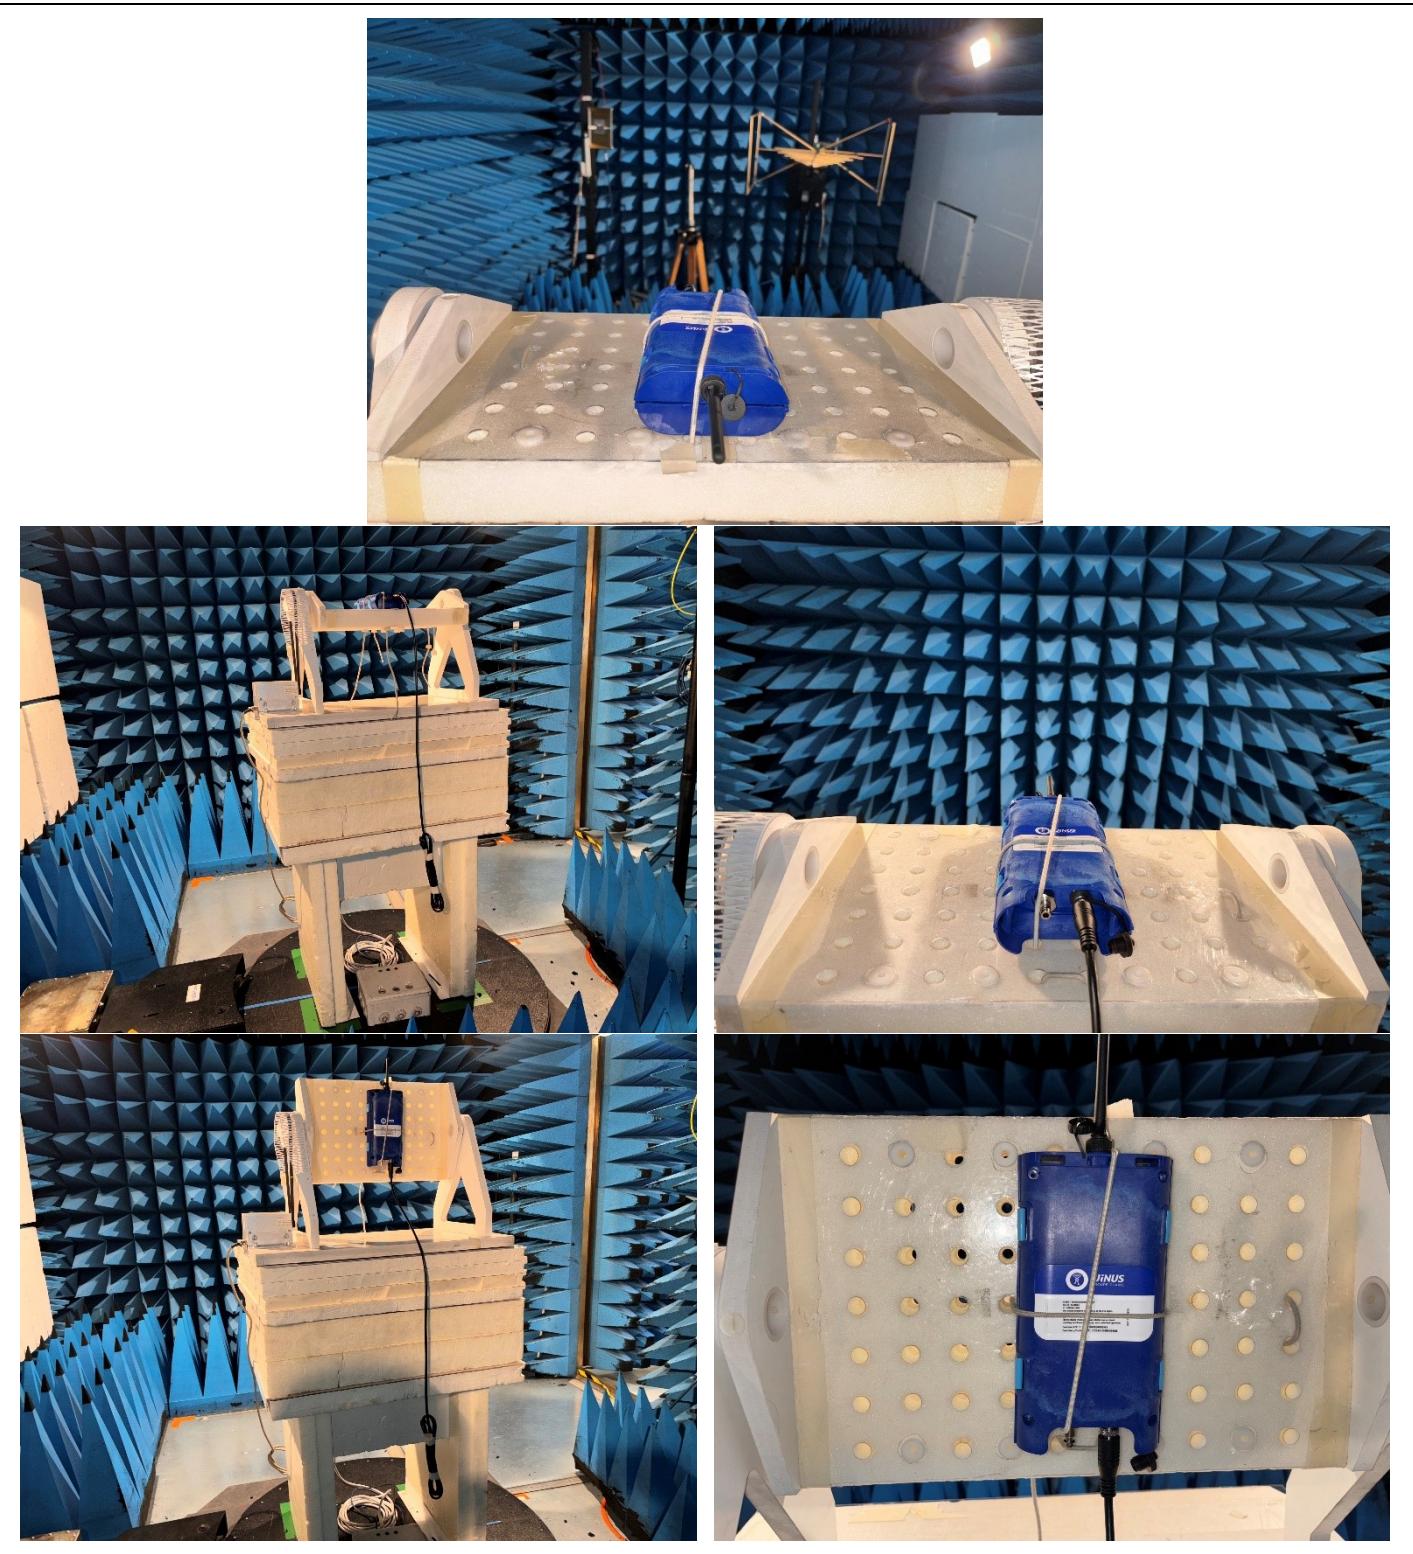


Photo of Unwanted Emissions in Restricted Frequency Bands on FAR



L C I E

9.3. LIMIT

Measure at 300m		
Frequency range	Level	Detector
9kHz-490kHz	67.6dB μ V/m /F(kHz)	QPeak
Measure at 30m		
Frequency range	Level	Detector
490kHz-1.705MHz	87.6dB μ V/m /F(kHz)	QPeak
1.705MHz-30MHz	29.5dB μ V/m	QPeak
Measure at 10m		
Frequency range	Level	Detector
30MHz to 88MHz	29.5dB μ V/m	QPeak
88MHz to 216MHz	33dB μ V/m	QPeak
216MHz to 960MHz	35.5B μ V/m	QPeak
960MHz to 1000MHz	43.5dB μ V/m	QPeak
Above 1000MHz	63.5dB μ V/m	Peak
	43.5dB μ V/m	Average
Measure at 3m		
Frequency range	Level	Detector
30MHz to 88MHz	40dB μ V/m	QPeak
88MHz to 216MHz	43.5dB μ V/m	QPeak
216MHz to 960MHz	46B μ V/m	QPeak
960MHz to 1000MHz	54dB μ V/m	QPeak
Above 1000MHz	74dB μ V/m	Peak
	54dB μ V/m	Average



LCIE

9.4. TEST EQUIPMENT LIST

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Amplifier 10MHz - 18GHz	LCIE SUD EST	—	A7102082	05/22	05/24
Antenna Bi-log	AH System	SAS-521-7	C2040180	05/23	05/25
Antenna horn 18GHz	EMCO	3115	C2042029	03/22	03/25
BAT EMC	NEXIO	v3.21.0.32	L1000115		
CABLE	TELEDYNE	R82-0404-0.5M	A5330010	03/22	03/25
Cable 0.75m	-	18GHz	A5329900	08/22	08/24
Cable SMA 40cm	WITHWAVE	W101-SM1-0.4M	A5329979	10/23	10/26
Comb EMR HF	YORK	CGE01	A3169114		
CONTROLLER	INNCO	CO3000	D3044034		
Emission Cable (SMA 1m)	TELEDYNE	26GHz	A5329874	08/22	08/25
Emission Cable (SMA 3.3m)	TELEDYNE	26GHz	A5329875	08/22	08/25
Filter Matrice	LCIE SUD EST	Combined filters	A7484078	03/23	03/25
Rehausse Table C3	LCIE	—	F2000507		
Rehausse Table C3	LCIE	—	F2000511		
Semi-Anechoic chamber #3 (BF)	SIEPEL	—	D3044017_BF	04/22	04/25
Semi-Anechoic chamber #3 (VSWR)	SIEPEL	—	D3044017_VSWR	04/22	04/25
Spectrum analyzer	ROHDE & SCHWARZ	FSU 26	A4060058	09/23	09/25
Table C3	LCIE	—	F2000461		
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	05/23	05/25
TIILT	INNCO	TIILT	D3044033		
Turntable chamber (Cage#3)	ETS Lingren	Model 2165	F2000371		
Turntable controller (Cage#3)	ETS Lingren	Model 2090	F2000444		
Antenna Mat (OATS)	ETS Lingren	2071-2	F2000392		
Cable (OATS)	—	1GHz	A5329623	09/23	09/24
Emission Cable	RADIALEX		A5329061	07/23	07/24
OATS	—	—	F2000409	08/23	08/24
Table C1/OATS	LCIE	—	F2000445		
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	05/23	05/25
Antenna Bi-log	CHASE	CBL6111A	C2040172	04/22	04/24

9.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None



L C I E


9.6. RESULTS

For all following measurements, worst case is presented with different configurations and modulations of EUT.

9.6.1. 9kHz to 30MHz

Graphs – Pre characterization:

Graph identifier	Polarization	Mode	Channel	EUT position	Comments
Emr# 1	0°/90°	TX	Single	0° to 150° step 30	Configuration n°1
Emr# 2	180°	TX	Single	0° to 150° step 30	Configuration n°1
Emr# 3	0°/90°	TX	Single	0° to 150° step 30	Configuration n°2
Emr# 4	180°	TX	Single	0° to 150° step 30	Configuration n°2
Emr# 5	0°/90°	TX	Single	0° to 150° step 30	Configuration n°3
Emr# 6	180°	TX	Single	0° to 150° step 30	Configuration n°3
Emr# 7	0°/90°	TX	Single	0° to 150° step 30	Configuration n°4
Emr# 8	180°	TX	Single	0° to 150° step 30	Configuration n°4

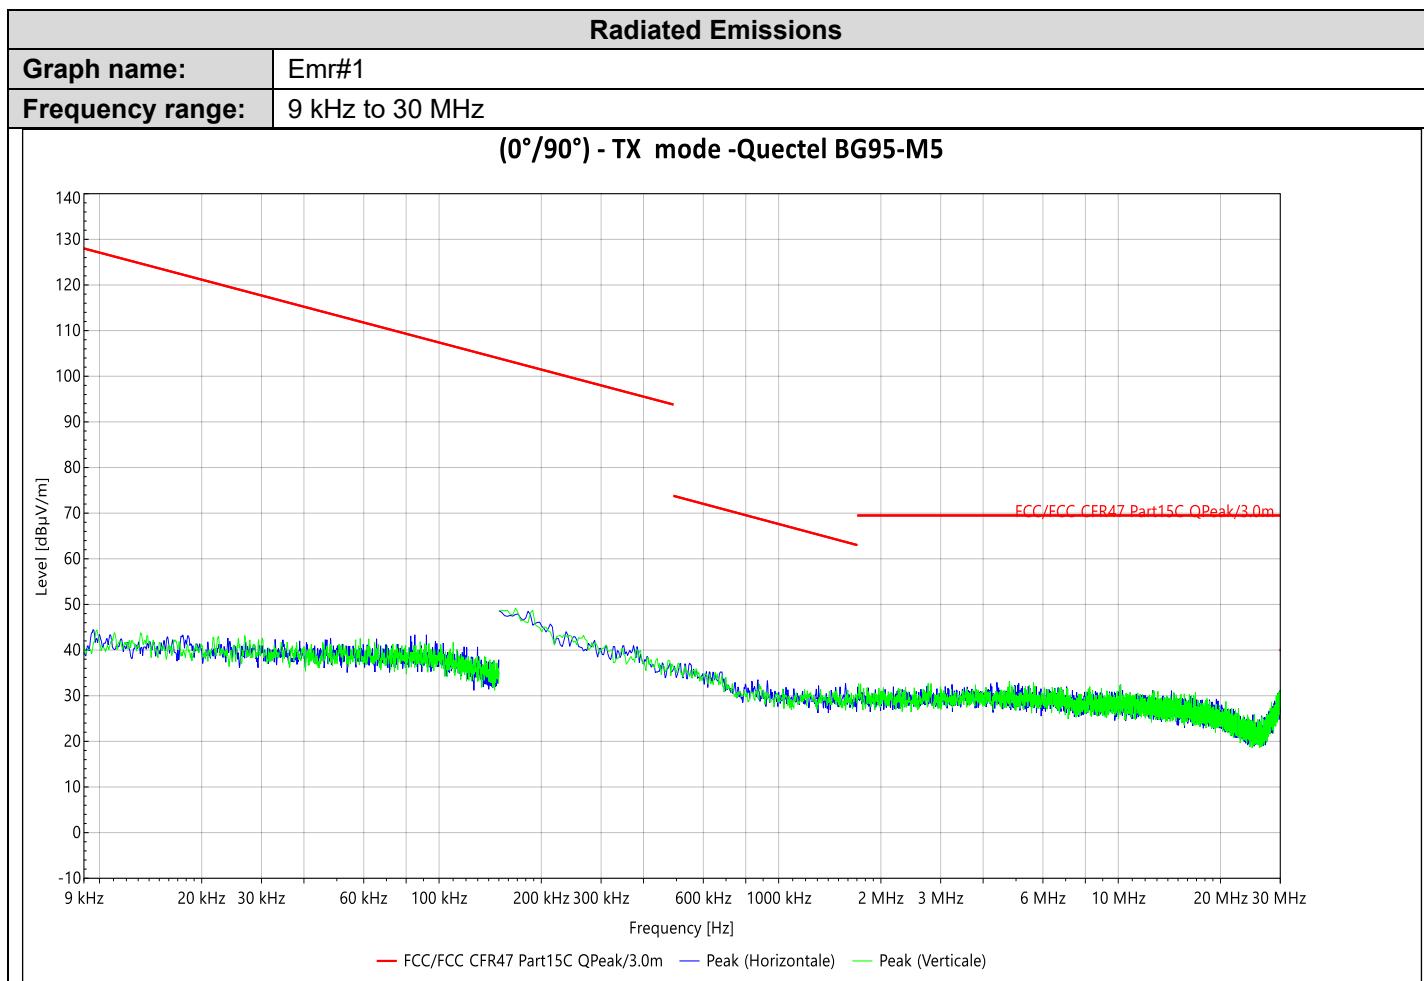

No significant frequency observed



L C I E

Radiated Emissions


Graph name:

Emr#2

Frequency range:

9 kHz to 30 MHz


(180°) - TX mode - Quectel BG95-M5

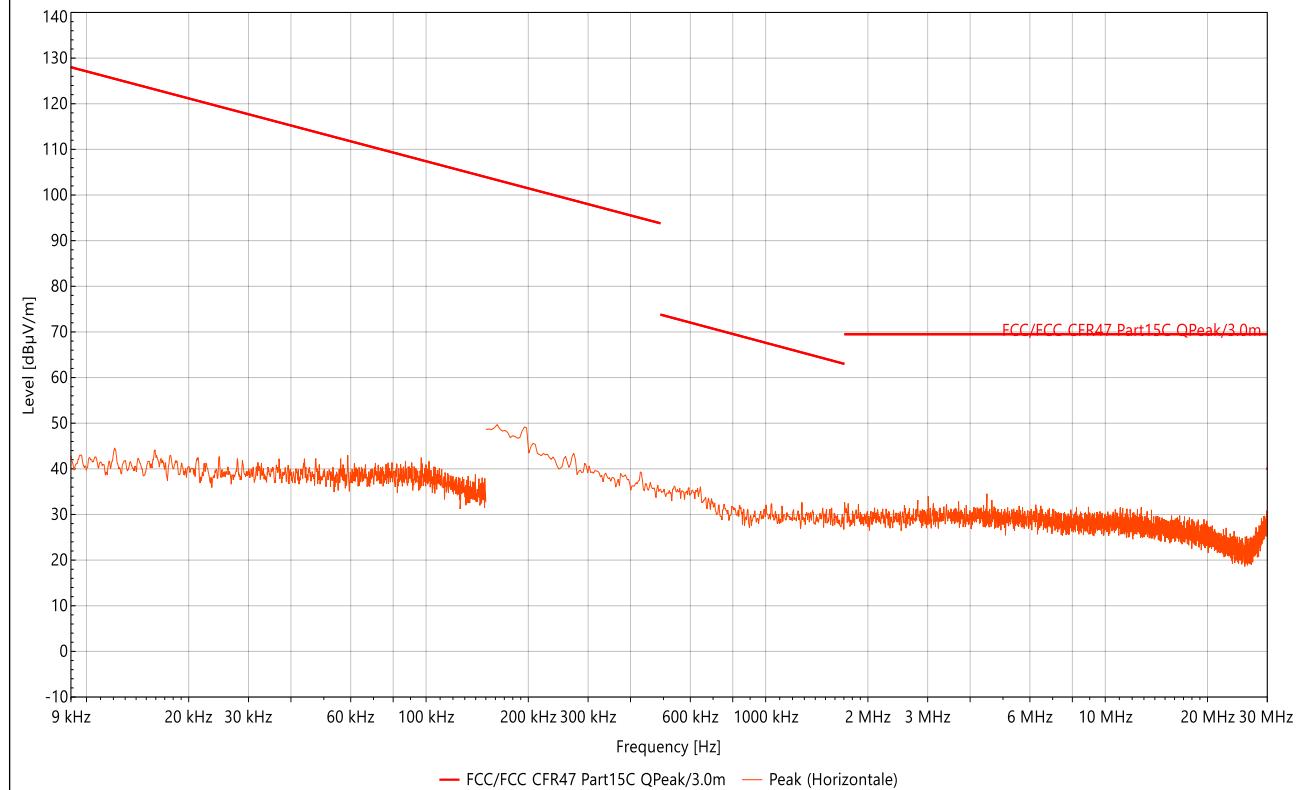

No significant frequency observed



L C I E

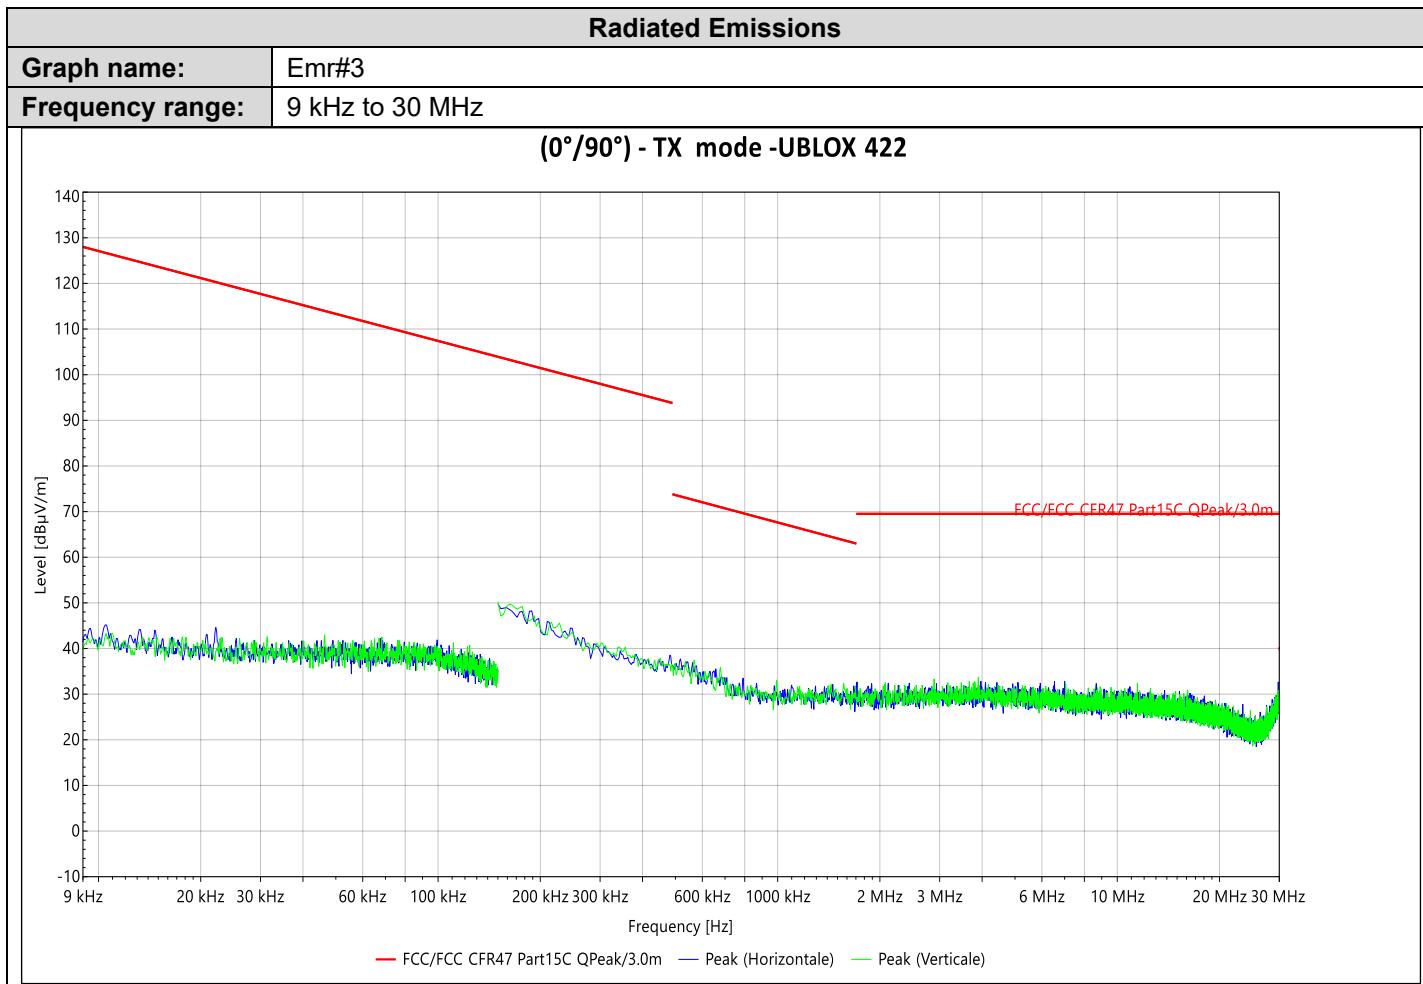

No significant frequency observed



L C I E

Radiated Emissions


Graph name:

Emr#4

Frequency range:

9 kHz to 30 MHz

(180°) - TX mode - UBLOX 422

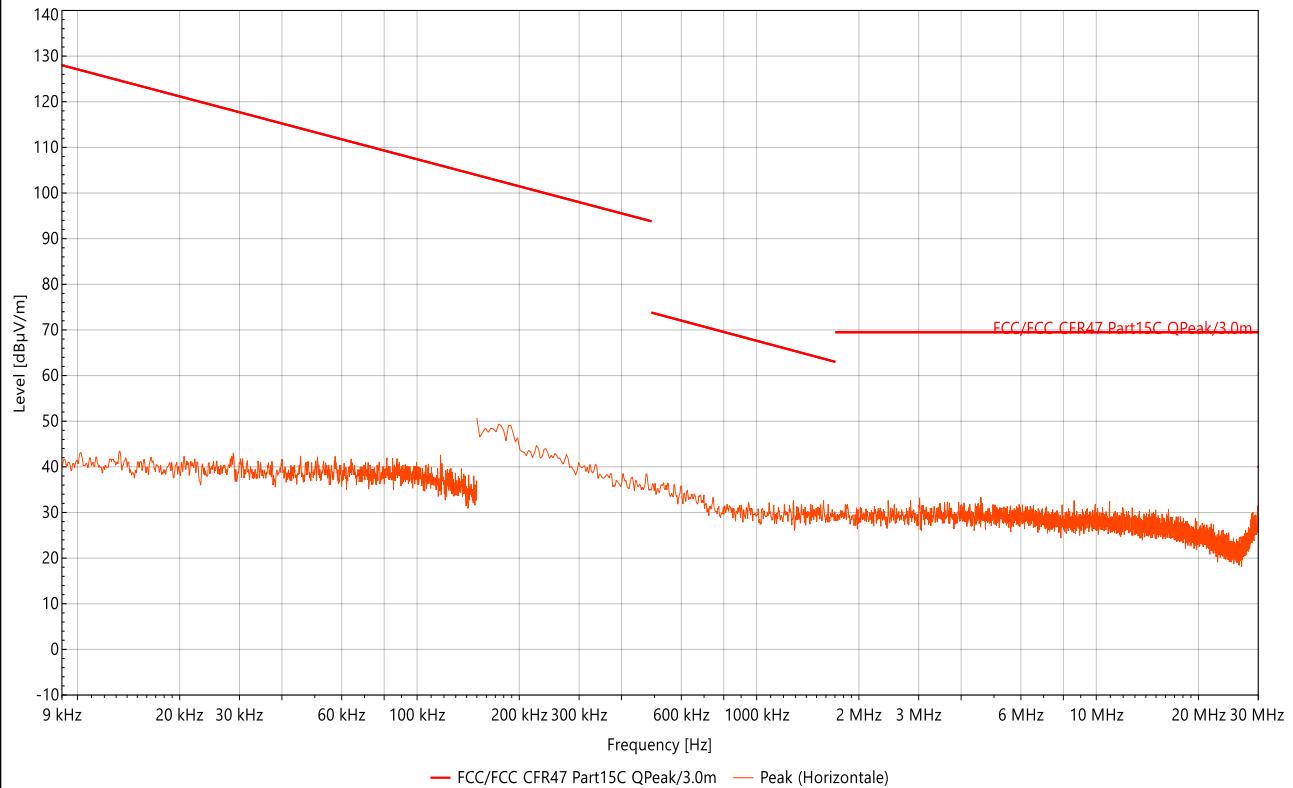

No significant frequency observed



L C I E

Radiated Emissions


Graph name:

Emr#5

Frequency range:

9 kHz to 30 MHz

(0°/90°) - TX mode - UBLOX U201

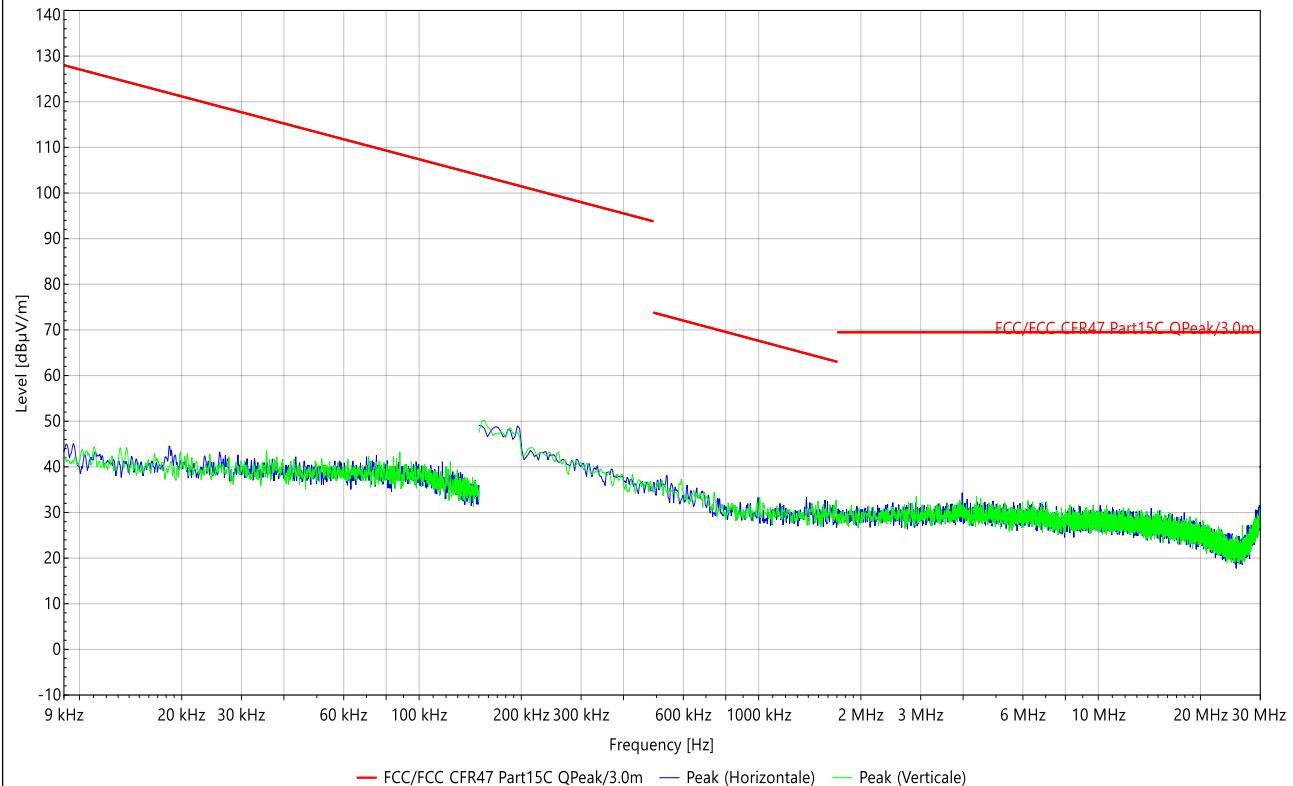

No significant frequency observed



L C I E

Radiated Emissions


Graph name:

Emr#6

Frequency range:

9 kHz to 30 MHz

(180°) - TX mode - UBLOX U201

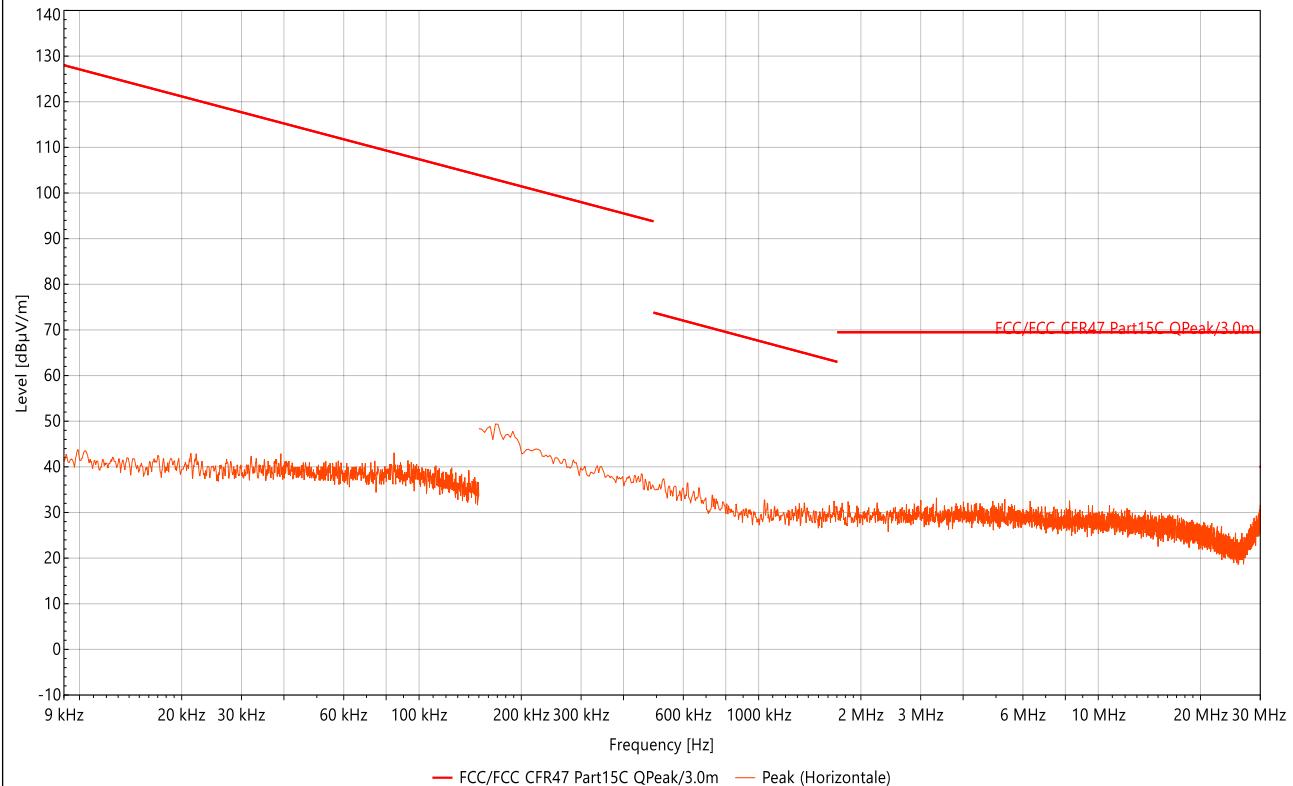

No significant frequency observed



L C I E

Radiated Emissions


Graph name:

Emr#7

Frequency range:

9 kHz to 30 MHz

(0°/90°) - TX - mode NEMEUS MM002-LS-US

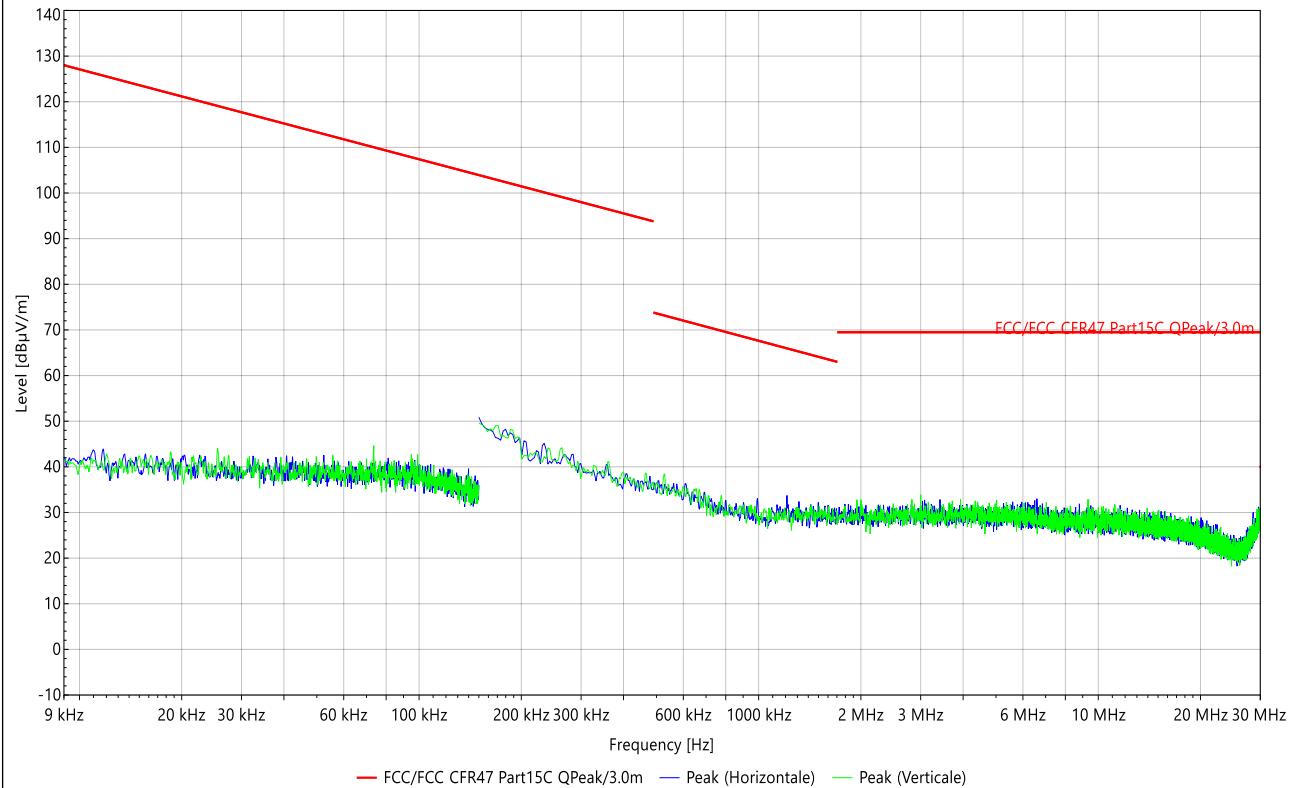

No significant frequency observed



L C I E

Radiated Emissions


Graph name:

Emr#8

Frequency range:

9 kHz to 30 MHz

(180°) - TX mode - NEMEUS MM002-LS-US

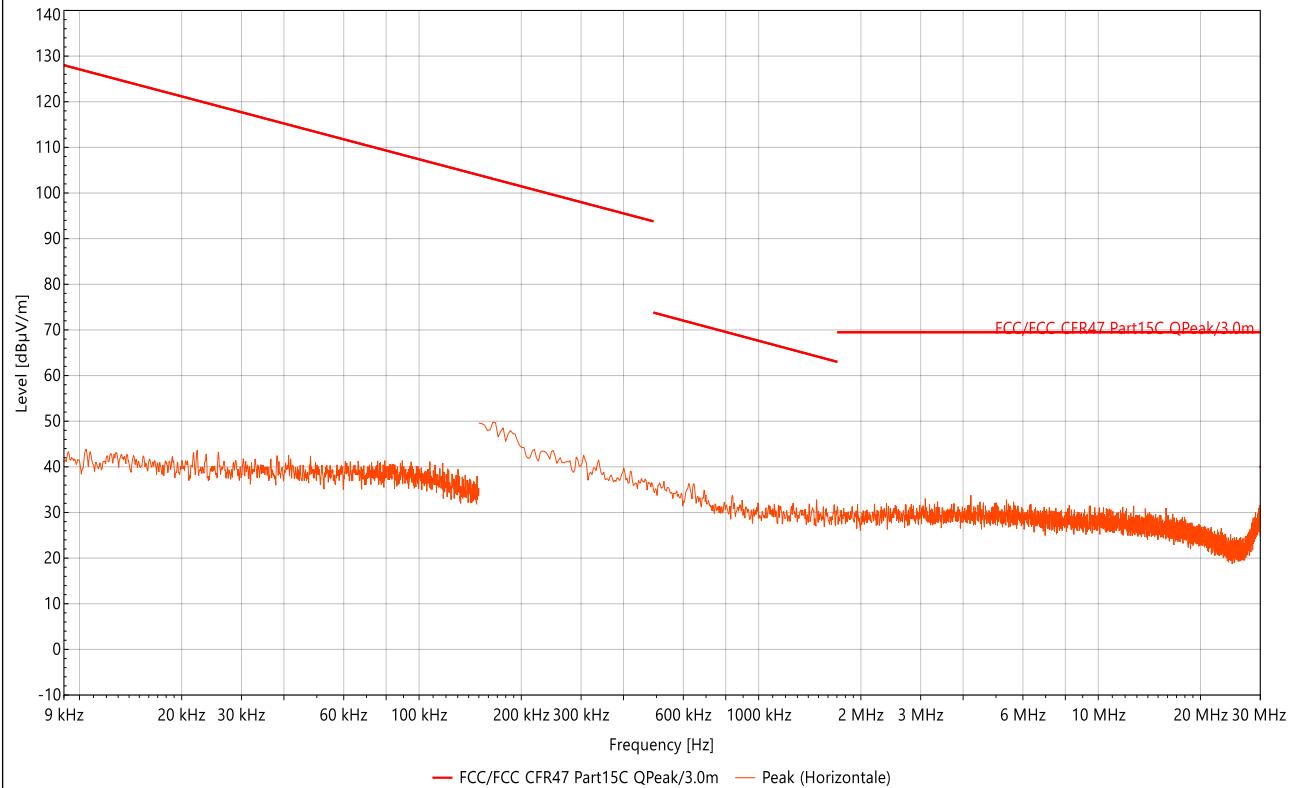


No significant frequency observed

9.6.2. 30MHz to 9.5GHz

Graphs – Pre characterization:

Graph identifier	Polarization	Mode	Channel	EUT position	Comments
Emr# 9	H/V	TX	Single	0° to 150° step 30	Configuration n°1
Emr# 10	H/V	TX	Single	0° to 150° step 30	Configuration n°2
Emr# 11	H/V	TX	Single	0° to 150° step 30	Configuration n°3
Emr# 12	H/V	TX	Single	0° to 150° step 30	Configuration n°4

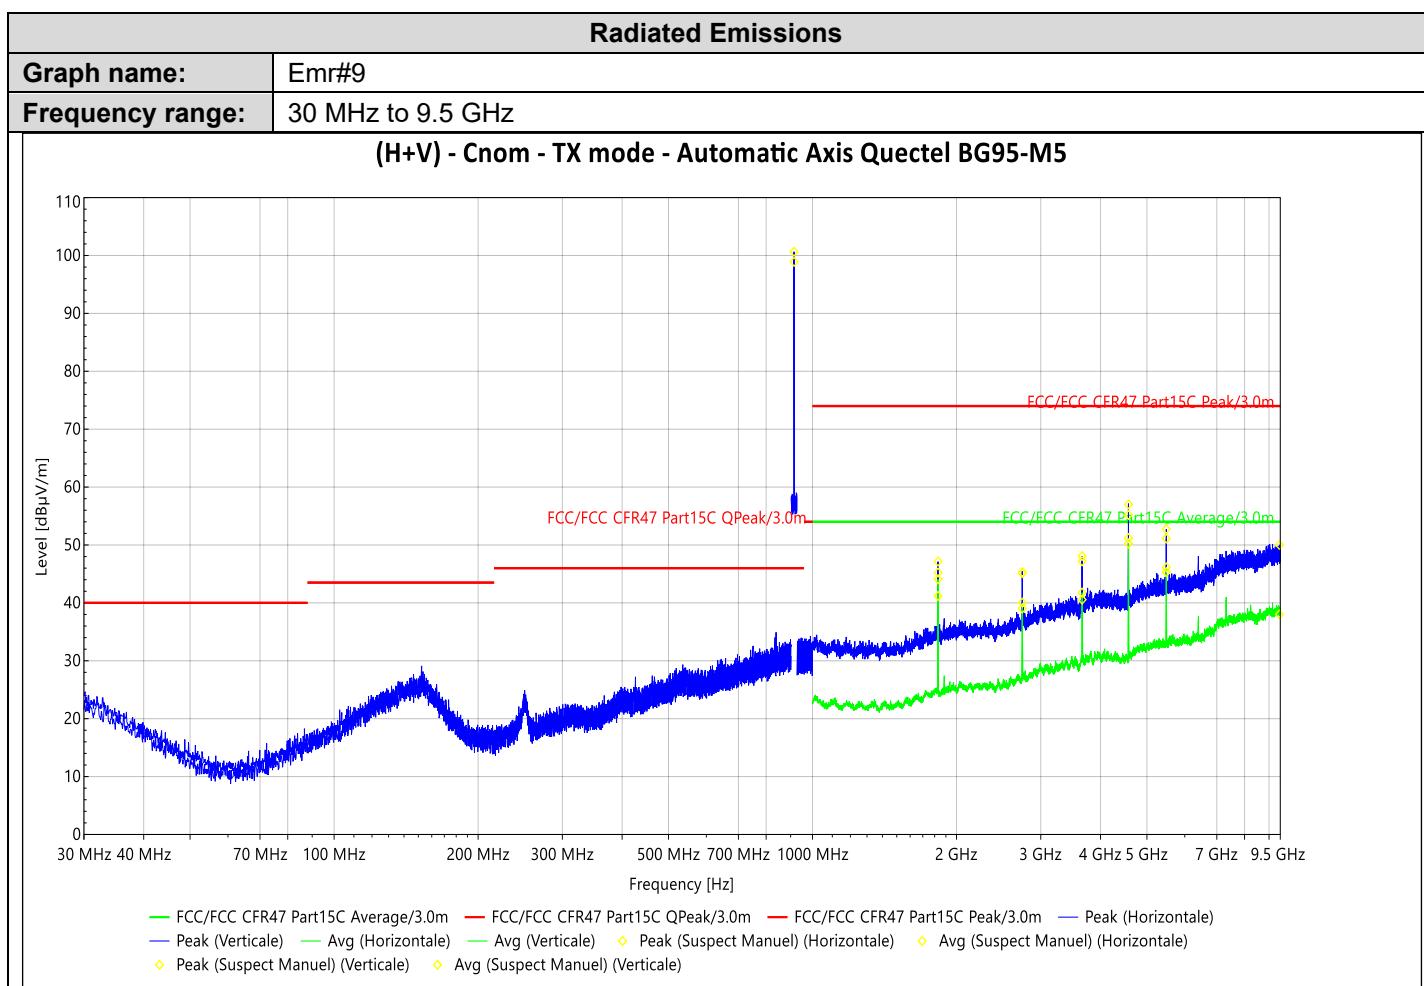

Frequency	PK Level (dB μ V/m)	Lim.PK (dB μ V/m)	Avg (dB μ V/m)	Lim.Avg (dB μ V/m)	Lim.QP (dB μ V/m)	Angle (°)	Polar.	Correct. (dB)
914.818 MHz	100.65				46.00	278	H	28.90
1.830 GHz	47.14	74.00	44.09	54.00		305	H	-28.29
2.745 GHz	45.31	74.00	40.04	54.00		176	H	-25.51
3.660 GHz	48.09	74.00	41.77	54.00		291	H	-21.67
4.574 GHz	55.17	74.00	50.24	54.00		199	H	-20.62
5.489 GHz	51.11	74.00	46.13	54.00		213	H	-17.48



L C I E

Frequency	PK Level (dB μ V/m)	Lim.PK (dB μ V/m)	Avg (dB μ V/m)	Lim.Avg (dB μ V/m)	Lim.QP (dB μ V/m)	Angle (°)	Polar.	Correct. (dB)
9.463 GHz	50.01	74.00	38.02	54.00		238	H	-11.23
1.830 GHz	45.23	74.00	41.19	54.00		267	V	-28.29
2.744 GHz	45.14	74.00	39.02	54.00		267	V	-25.51
3.660 GHz	47.18	74.00	40.56	54.00		238	V	-21.67
4.576 GHz	57.02	74.00	51.19	54.00		214	V	-20.61
5.489 GHz	52.75	74.00	45.30	54.00		222	V	-17.48
915.182 MHz	98.91				46.00	323	V	28.89




L C I E

Radiated Emissions

Graph name: Emr#10

Frequency range: 30 MHz to 9.5 GHz

(H+V) - Cnom - TX mode - Automatic Axis UBLOX 422

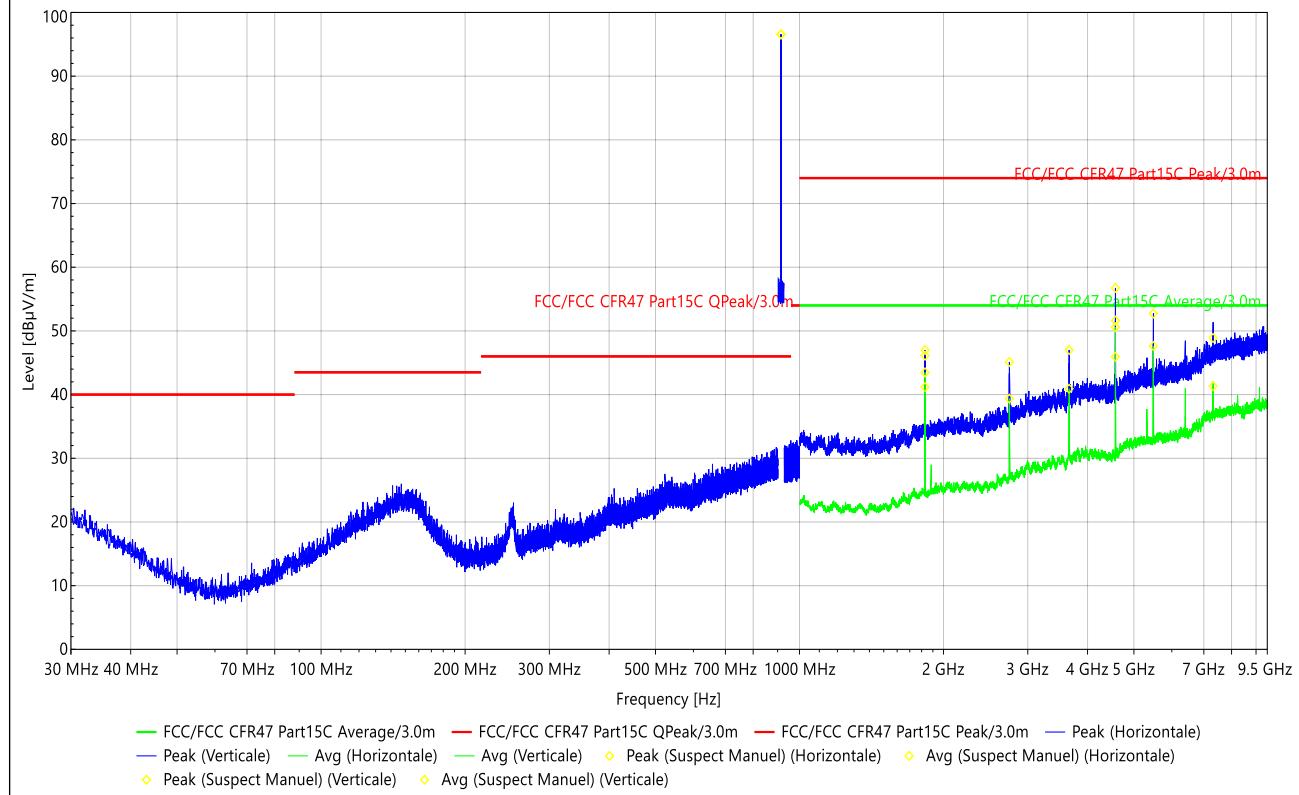

Frequency	PK Level (dB μ V/m)	Lim.PK (dB μ V/m)	Avg (dB μ V/m)	Lim.Avg (dB μ V/m)	Lim.QP (dB μ V/m)	Angle (°)	Polar.	Correct. (dB)
914.818 MHz	96.58				46.00	98	H	28.90
1.830 GHz	46.99	74.00	43.48	54.00		127	H	-28.29
2.745 GHz	45.12	74.00	39.36	54.00		12	H	-25.51
4.574 GHz	51.62	74.00	45.95	54.00		12	H	-20.62
7.319 GHz	48.89	74.00	41.32	54.00		331	H	-12.94
1.830 GHz	46.11	74.00	41.18	54.00		51	V	-28.29
3.660 GHz	47.01	74.00	40.92	54.00		51	V	-21.67
4.574 GHz	56.75	74.00	50.58	54.00		350	V	-20.62
5.489 GHz	52.73	74.00	47.64	54.00		34	V	-17.48
914.818 MHz	96.54				46.00	95	V	28.90



L C I E

Radiated Emissions


Graph name:

Emr#11

Frequency range:

30 MHz to 9.5 GHz


(H+V) - Cnom - TX mode - Automatic Axis UBLOX U201

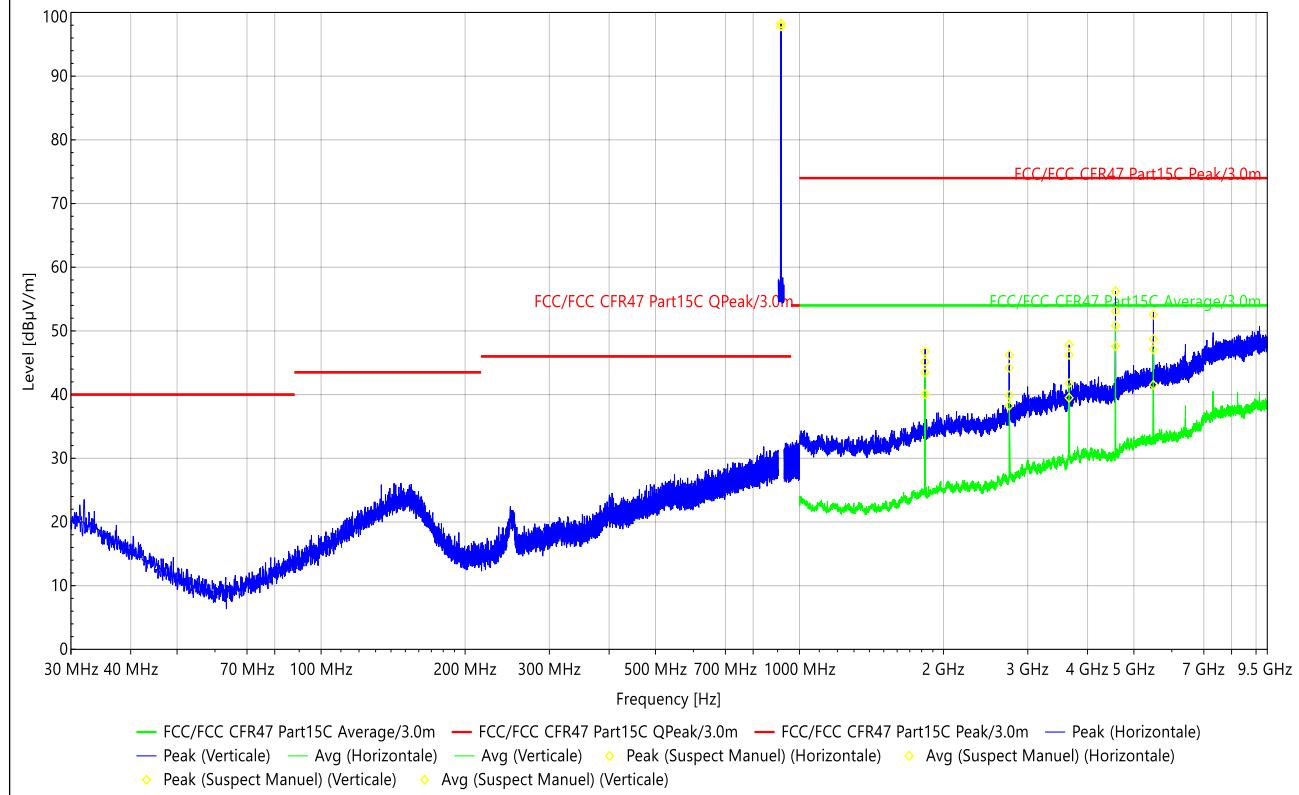

Frequency	PK Level (dB μ V/m)	Lim.PK (dB μ V/m)	Avg (dB μ V/m)	Lim.Avg (dB μ V/m)	Lim.QP (dB μ V/m)	Angle (°)	Polar.	Correct. (dB)
914.818 MHz	97.83				46.00	106	H	28.90
1.830 GHz	46.75	74.00	43.49	54.00		160	H	-28.29
2.745 GHz	46.24	74.00	39.90	54.00		45	H	-25.51
3.660 GHz	46.24	74.00	39.50	54.00		87	H	-21.67
4.576 GHz	53.14	74.00	47.59	54.00		160	H	-20.61
5.489 GHz	48.76	74.00	41.54	54.00		16	H	-17.48
1.830 GHz	45.18	74.00	40.06	54.00		235	V	-28.29
2.745 GHz	44.20	74.00	38.27	54.00		180	V	-25.51
3.660 GHz	47.82	74.00	41.79	54.00		49	V	-21.67
4.576 GHz	56.23	74.00	50.81	54.00		68	V	-20.61
5.489 GHz	52.57	74.00	47.10	54.00		0	V	-17.48
914.818 MHz	98.26				46.00	101	V	28.90



L C I E

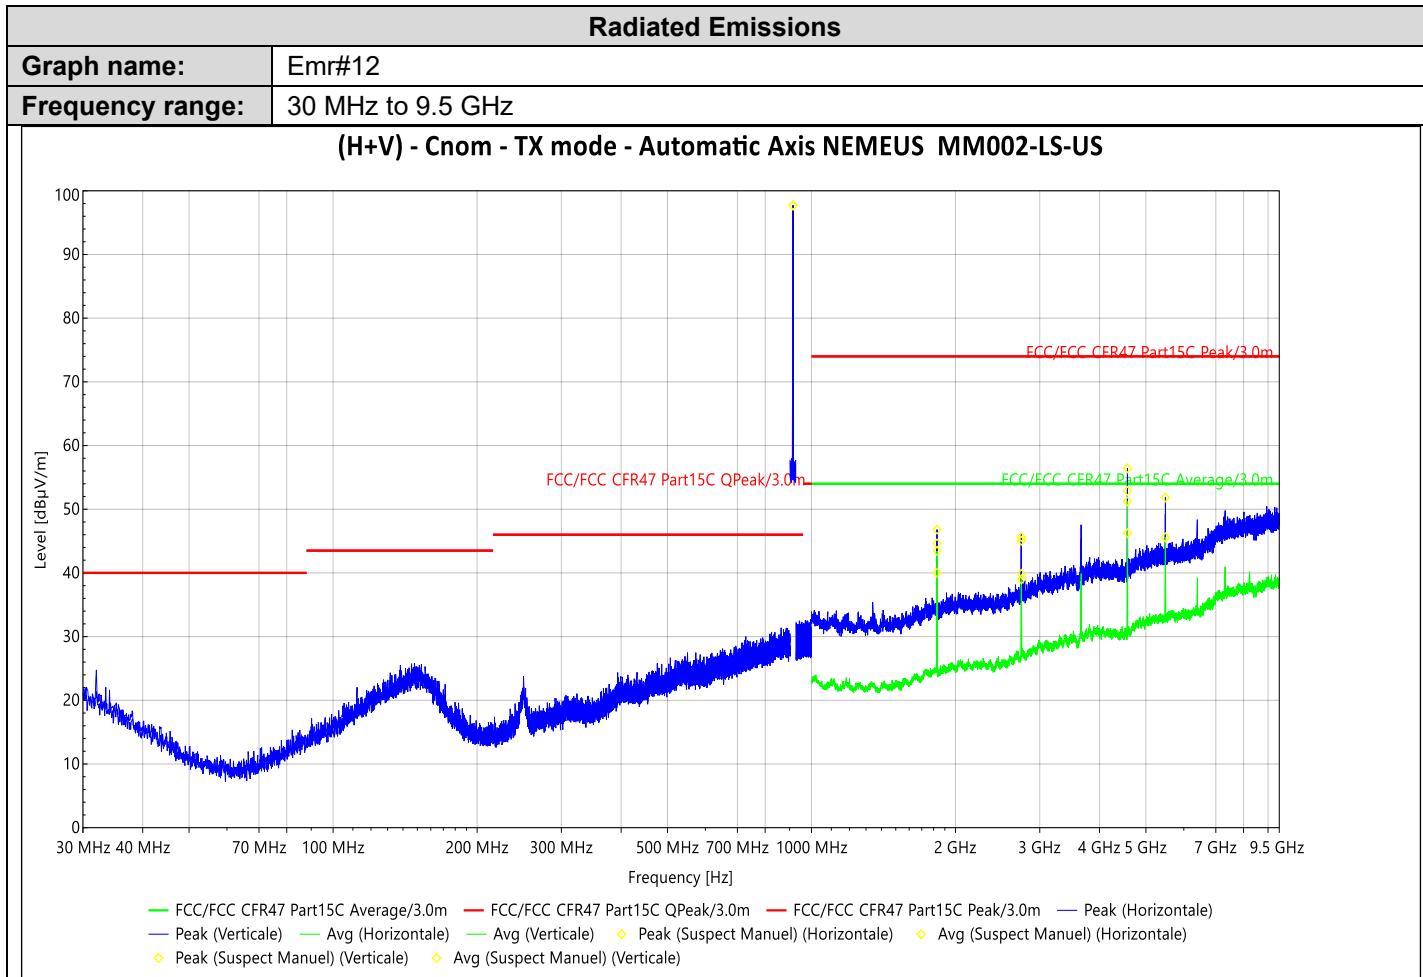

Frequency	PK Level (dB μ V/m)	Lim.PK (dB μ V/m)	Avg (dB μ V/m)	Lim.Avg (dB μ V/m)	Lim.QP (dB μ V/m)	Angle (°)	Polar.	Correct. (dB)
914.818 MHz	97.72				46.00	105	H	28.90
1.830 GHz	46.82	74.00	43.45	54.00		0	H	-28.29
2.745 GHz	45.65	74.00	39.84	54.00		37	H	-25.51
4.576 GHz	52.87	74.00	46.23	54.00		141	H	-20.61
1.830 GHz	44.62	74.00	40.02	54.00		49	V	-28.29
2.745 GHz	45.06	74.00	38.97	54.00		89	V	-25.51
4.574 GHz	56.42	74.00	51.22	54.00		49	V	-20.62
5.489 GHz	51.84	74.00	45.59	54.00		0	V	-17.48
914.818 MHz	97.69				46.00	107	V	28.90

9.7. CONCLUSION

Unwanted emissions in non-restricted bands measurement performed on the sample of the product **H0102**, Sn: **IJH0102-0000 0122**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247** limits.



L C I E

10. UNCERTAINTIES CHART

<i>Kind of measurement</i>	<i>Wide uncertainty laboratory</i>
Occupied Channel Bandwidth	±2.8 %
Humidity	±3.2 %
Power Spectral Density, Conducted	±1.7 dB
Radio frequency	±0.3 ppm
RF power, conducted	±1.2 dB
RF power, radiated (Full anechoic chamber above 1GHz)	±3.7 dB
RF power, radiated (Semi anechoic chamber & open test site)	±5.6 dB
Spurious emission, conducted	±2.3 dB
Spurious emission, radiated (Full anechoic chamber above 1GHz)	±3.8 dB
Spurious emission, radiated (Semi anechoic chamber & open test site)	±5.7 dB
Temperature	±0.75 °C
Time	±2.3 %
Voltage	±1.7 %

The uncertainty values calculated by the laboratory are lower than limit uncertainty values defined by the standard. The conformity of the sample is directly established by the applicable limit values. This table includes all uncertainties maximum feasible for testing in the laboratory, whether or not made in this report.