


FINISHING THE RIOT

TRANSMITTER PREPARATION



- Install eight "AA" batteries into transmitter, making sure the polarity is correct.
- Turn the transmitter on and check the battery light.
- If both LED's light up, the batteries are acceptable. If only the red LED lights up, immediately replace the batteries.


RECEIVER BATTERY INSTALLATION

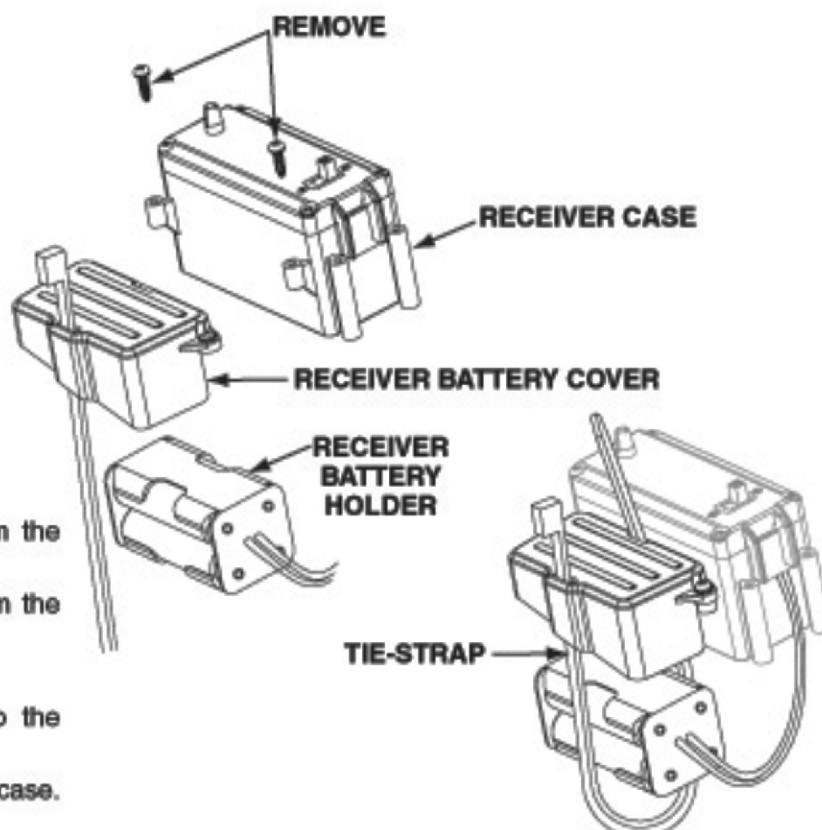

- Remove the receiver battery cover from the receiver case.
- Remove the receiver battery holder from the receiver cover.
- Install (4) "AA" batteries.
- Reinstall the receiver battery holder to the cover using the included tie-strap.
- Secure the receiver cover to the receiver case.


RECEIVER ANTENNA INSTALLATION

- Uncoil and **straighten** the antenna wire.
- Route the receiver antenna wire through the antenna tube.
- Install the tube into the antenna mount.

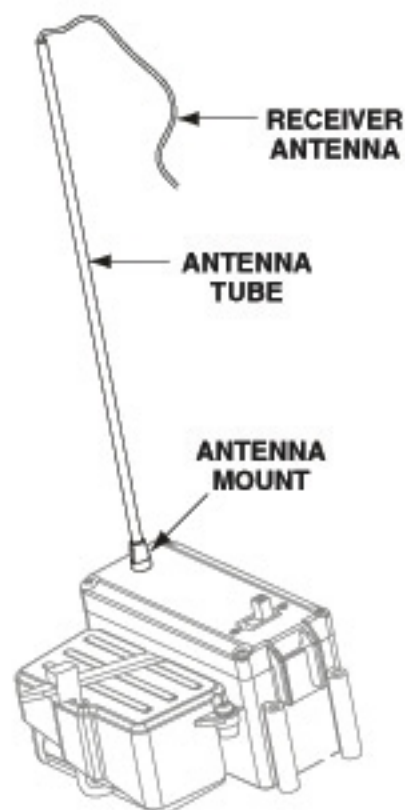


X DO NOT CUT ANTENNA WIRE!

OIL THE AIR FILTER

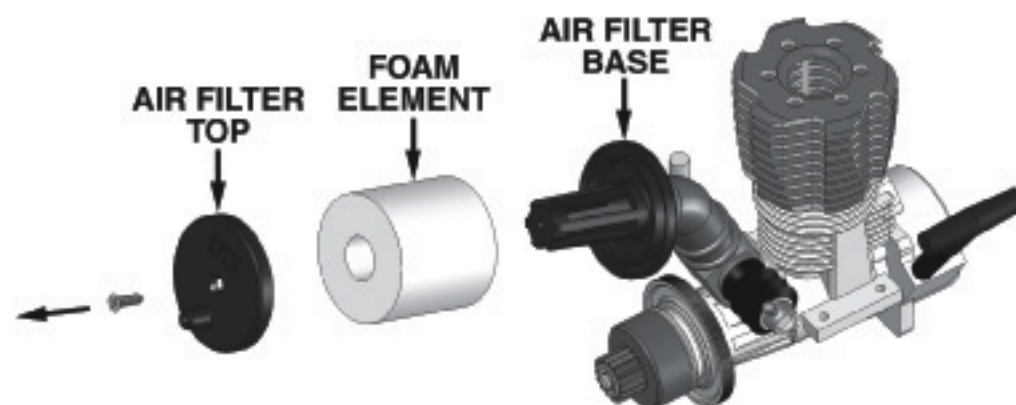

- Remove the air filter top and foam element.
- Apply both tubes of the included air filter oil onto the foam element, squeezing the element until it is completely coated with the oil. **TIP!** Placing the element in a plastic bag will help keep your hands clean.
- Remove any excess oil with a paper towel.
- Reinstall, making sure the filter is properly seated on the base.

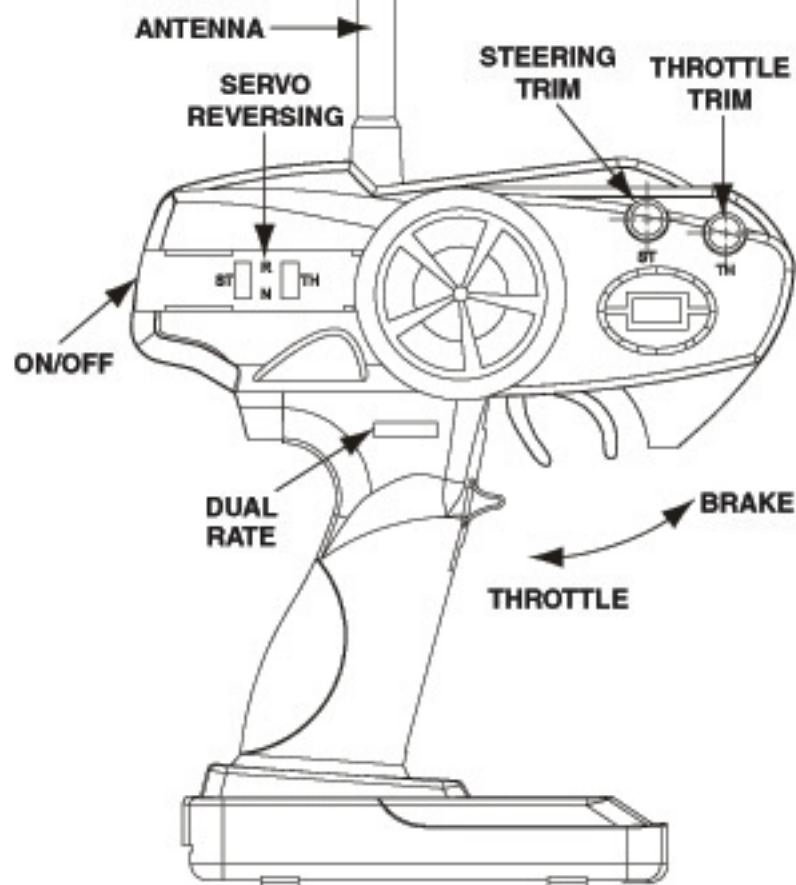RADIO SYSTEM CHECK

! CHECK THE RADIO SYSTEM FOR PROPER FUNCTION BEFORE EACH RUN



WHEELS TURN RIGHT



CARBURETOR OPENS

- Fully extend the transmitter antenna.
- Turn the transmitter on, then turn the receiver on.
- Turn the transmitter wheel to the right—the front wheels should turn to the right. If not, move the steering servo reverse switch.
- When running, adjust the steering trim so the buggy tracks straight.
- Pull the throttle trigger to make sure the carburetor opens fully and the throttle linkage functions properly without binding.
- Adjust the throttle trim until the carb is at the idle position. Always adjust idle speed with the idle stop screw on the carb, not the throttle trim.
- Push the trigger and roll the buggy to make sure the brakes are applied.
- To shift the Riot from forward to reverse, flip the toggle switch to the opposite position.

BODY INSTALLATION

- Decal the body to your liking. Use the photos on the box as a reference.
- Install the body onto the chassis using four body clips.

